

280 Trumbull Street
Hartford, CT 06103-3597
Main (860) 275-8200
Fax (860) 275-8299
kbaldwin@rc.com
Direct (860) 275-8345

Also admitted in Massachusetts

June 4, 2014

Melanie A. Bachman
Acting Executive Director
Connecticut Siting Council
10 Franklin Square
New Britain, CT 06051

Re: **Notice of Exempt Modification – Facility Modification
162 Birdseye Road, Shelton, Connecticut**

Dear Ms. Bachman:

Cellco Partnership d/b/a Verizon Wireless (“Cellco”) currently maintains twelve (12) antennas at the 98-foot level of the existing 120-foot tower at 162 Birdseye Road in Shelton, Connecticut (the “Property”). The tower is owned by SBA. The Council approved Cellco’s use of this tower in 2007. Cellco now intends to modify its facility by removing six (6) existing 850 MHz antennas and replacing them with three (3) model LNX-6514DS, 850 MHz antennas and three (3) model HBX-6517D5, 2100 MHz antennas, all at the same 98-foot level on the tower. Cellco also intends to install three (3) remote radio heads (“RRHs”) behind its 2100 MHz antennas and one (1) HYBRIFLEX™ antenna cable inside the monopole. Included in Attachment 1 are specifications for Cellco’s replacement antenna, RRHs and HYBRIFLEX™ cable.

Please accept this letter as notification pursuant to R.C.S.A. § 16-50j-73, for construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-72(b)(2). In accordance with R.C.S.A. § 16-50j-73, a copy of this letter is being sent to Mark A. Lauretti, Mayor of the City of Shelton. A copy of this letter is also being sent to Adolph and Roberta G. Hudak, the owners of the Property.

The planned modifications to the facility fall squarely within those activities explicitly provided for in R.C.S.A. § 16-50j-72(b)(2).



Law Offices

BOSTON

HARTFORD

NEW YORK

PROVIDENCE

STAMFORD

ALBANY

LOS ANGELES

NEW LONDON

SARASOTA

www.rc.com

12950463-v1


ROBINSON & COLE^{LLP}

Melanie A. Bachman
June 4, 2014
Page 2

1. The proposed modifications will not result in an increase in the height of the existing tower. Cellco's replacement antennas and RRHs will be installed at a centerline height of 98 feet on the existing tower.
2. The proposed modifications will not involve any change to ground-mounted equipment and, therefore, will not require the extension of the site boundary.
3. The proposed modifications will not increase noise levels at the facility by six decibels or more, or to levels that exceed state and local criteria.
4. The operation of the replacement antennas will not increase radio frequency (RF) emissions at the facility to a level at or above the Federal Communications Commission (FCC) safety standard. Far Field Approximation tables for Cellco's modified facility is included in Attachment 2.
5. The proposed modifications will not cause a change or alteration in the physical or environmental characteristics of the site.
6. The tower and its foundation can support Cellco's proposed modifications. (See Structural Analysis included in Attachment 3).

For the foregoing reasons, Cellco respectfully submits that the proposed modifications to the above-referenced telecommunications facility constitutes an exempt modification under R.C.S.A. § 16-50j-72(b)(2).

Sincerely,

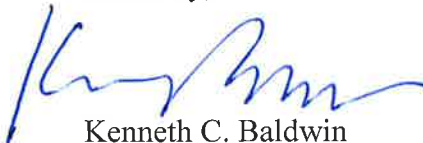

Kenneth C. Baldwin

Enclosures
Copy to:

Mark A. Lauretti, Mayor
Adolph and Roberta G. Hudak
Sandy M. Carter



ATTACHMENT 1

Product Specifications



Andrew Solutions
LNX-6514DS-T6M

DualPol® Antenna, 698–896 MHz, 65° horizontal beamwidth, fixed electrical tilt

- Broadband, providing future-ready single antenna for application in 700 MHz and existing 850 MHz cellular operation
- Air dielectric design provides superior PIM performance with repeatable antenna-to-antenna gain and pattern consistency
- Single piece radome provides long term mechanical stability
- Proven core design technology, with over 1,000,000 similar antennas deployed
- Exceptional USLS pattern shaping for optimizing coverage and interference mitigation for LTE applications
- Specifically designed to have physical dimensions similar to most existing cellular antennas

Electrical Specifications

| Frequency Band, MHz | 698–806 | 806–896 |
|--------------------------------------|---------------|---------------|
| Gain, dBi | 15.8 | 16.6 |
| Beamwidth, Horizontal, degrees | 65 | 65 |
| Beamwidth, Vertical, degrees | 12.6 | 11.0 |
| Beam Tilt, degrees | 6 | 6 |
| USLS, typical, dB | 18 | 18 |
| Front-to-Back Ratio at 180°, dB | 34 | 34 |
| Isolation, dB | 30 | 30 |
| VSWR Return Loss, dB | 1.35:1 16.5 | 1.35:1 16.5 |
| PIM, 3rd Order, 2 x 20 W, dBc | -150 | -150 |
| Input Power per Port, maximum, watts | 500 | 500 |
| Polarization | ±45° | ±45° |
| Impedance | 50 ohm | 50 ohm |
| Lightning Protection | dc Ground | dc Ground |

Mechanical Specifications

| | |
|---|--|
| Color Radome Material | Light gray Fiberglass, UV resistant |
| Connector Interface Location Quantity | 7-16 DIN Female Bottom 2 |
| Wind Loading, maximum | 617.7 N @ 150 km/h 138.9 lbf @ 150 km/h |
| Wind Speed, maximum | 241.0 km/h 149.8 mph |

Dimensions

| | |
|------------|-----------------------|
| Depth | 181.0 mm 7.1 in |
| Length | 1847.00 mm 72.72 in |
| Width | 301.00 mm 11.85 in |
| Net Weight | 17.40 kg 38.36 lb |

Regulatory Compliance/Certifications

| Agency | Classification |
|----------------------------|--|
| RoHS 2011/65/EU | Compliant by Exemption |
| China RoHS SJ/T 11364-2006 | Above Maximum Concentration Value (MCV) |
| ISO 9001:2008 | Designed, manufactured and/or distributed under this quality management system |

Product Specifications

COMMSCOPE®

LNX-6514DS-T6M



Included Products

DB380 — Pipe Mounting Kit for 2.4"-4.5" (60-115mm) OD round members on wide panel antennas. Includes 2 clamp sets and double nuts.

DB5083 — Downtilt Mounting Kit for 2.4"-4.5" (60 - 115 mm) OD round members. Includes a heavy-duty, galvanized steel downtilt mounting bracket assembly and associated hardware. This kit is compatible with the DB380 pipe mount kit for panel antennas that are equipped with two mounting brackets.

Product Specifications

COMMSCOPE®

POWERED BY



HBX-6517DS-VTM

Andrew® Teletilt® Antenna, 1710–2180 MHz, 65° horizontal beamwidth, RET compatible

- Superior azimuth tracking and pattern symmetry to minimize any sector overlap
- Rugged, reliable design with excellent passive intermodulation suppression
- The values presented on this datasheet have been calculated based on N-P-BASTA White Paper version 9.6 by the NGMN Alliance

Electrical Specifications

| Frequency Band, MHz | 1710–1880 | 1850–1990 | 1920–2180 |
|---|-------------------------------------|-------------------------------------|-------------------------------------|
| Gain by all Beam Tilts, average, dBi | 18.5 | 18.6 | 18.9 |
| Gain by all Beam Tilts Tolerance, dB | ±0.2 | ±0.3 | ±0.4 |
| Gain by Beam Tilt, average, dBi | 0° 18.3 3° 18.6 6° 18.4 | 0° 18.4 3° 18.7 6° 18.6 | 0° 18.8 3° 19.1 6° 18.7 |
| Beamwidth, Horizontal, degrees | 67 | 66 | 64 |
| Beamwidth, Horizontal Tolerance, degrees | ±1.8 | ±0.9 | ±2.8 |
| Beamwidth, Vertical, degrees | 5.0 | 4.7 | 4.4 |
| Beamwidth, Vertical Tolerance, degrees | ±0.2 | ±0.2 | ±0.3 |
| Beam Tilt, degrees | 0–6 | 0–6 | 0–6 |
| USLS, dB | 19 | 19 | 18 |
| Front-to-Back Total Power at 180° ± 30°, dB | 26 | 26 | 26 |
| CPR at Boresight, dB | 22 | 22 | 22 |
| CPR at Sector, dB | 11 | 11 | 9 |
| Isolation, dB | 30 | 30 | 30 |
| VSWR Return Loss, dB | 1.4 15.6 | 1.4 15.6 | 1.4 15.6 |
| PIM, 3rd Order, 2 x 20 W, dBc | -153 | -153 | -153 |
| Input Power per Port, maximum, watts | 350 | 350 | 350 |
| Polarization | ±45° | ±45° | ±45° |
| Impedance | 50 ohm | 50 ohm | 50 ohm |

General Specifications

| | |
|----------------------------|----------------------|
| Antenna Brand | Andrew® |
| Antenna Type | DualPol® |
| Band | Single band |
| Brand | DualPol® Teletilt® |
| Operating Frequency Band | 1710 – 2180 MHz |
| Number of Ports, all types | 2 |

Mechanical Specifications

| | |
|------------------------|------------------------|
| Color | Light gray |
| Lightning Protection | dc Ground |
| Radiator Material | Low loss circuit board |
| Radome Material | PVC, UV resistant |
| RF Connector Interface | 7-16 DIN Female |
| RF Connector Location | Bottom |

Product Specifications

COMMSCOPE®

HBX-6517DS-VTM



| | |
|------------------------------|---|
| RF Connector Quantity, total | 2 |
| Wind Loading, maximum | 393.0 N @ 150 km/h 88.3 lbf @ 150 km/h |
| Wind Speed, maximum | 241.0 km/h 149.8 mph |

Dimensions

| | |
|------------|---------------------|
| Depth | 83.0 mm 3.3 in |
| Length | 1902.0 mm 74.9 in |
| Width | 166.0 mm 6.5 in |
| Net Weight | 6.2 kg 13.7 lb |

Remote Electrical Tilt (RET) Information

Model with Factory Installed AISG 1.1 Actuator HBX-6517DS-R2M

Model with Factory Installed AISG 2.0 Actuator HBX-6517DS-A1M

RET System Teletilt®

Regulatory Compliance/Certifications

Agency

RoHS 2011/65/EU

China RoHS SJ/T 11364-2006

ISO 9001:2008

Classification

Compliant by Exemption

Above Maximum Concentration Value (MCV)

Designed, manufactured and/or distributed under this quality management system



Included Products


DB390 — Pipe Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Use for narrow panel antennas. Includes two pipe mounts.

DB5098E — Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members

Alcatel-Lucent RRH2x40-AWS

REMOTE RADIO HEAD

The Alcatel-Lucent RRH2x40-AWS is a high-power, small form-factor Remote Radio Head (RRH) operating in the AWS frequency band (1700/2100MHz - 3GPP Band 4). The Alcatel-Lucent RRH2x40-AWS is designed with an eco-efficient approach, providing operators with the means to achieve high quality and capacity coverage with minimum site requirements.

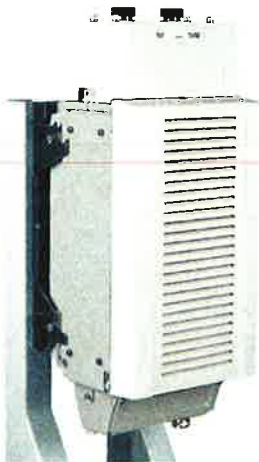

A distributed eNodeB expands deployment options by using two components, a Base Band Unit (BBU) containing the digital assets and a separate RRH containing the radio-frequency (RF) elements. This modular design optimizes available space and allows the main components of an eNodeB to be installed separately, within the same site or several kilometres apart.

The Alcatel-Lucent RRH2x40-AWS is linked to the BBU by an optical-fiber connection carrying downlink and uplink digital radio signals along with operations, administration and maintenance (OA&M) information. The Alcatel-Lucent RRH2x40-AWS has two transmit RF paths, 40 W RF output power per transmit path, and is designed to manage up to four-way receive diversity. The device is ideally suited to support macro coverage, with multiple-input multiple-output (MIMO) 2x2 operation in up to 20 MHz of bandwidth.

The Alcatel-Lucent RRH2x40-AWS is designed to make available all the benefits of a distributed eNodeB, with excellent RF characteristics, with low


capital expenditures (CAPEX) and low operating expenditures (OPEX). The limited space available in some sites may prevent the installation of traditional single-cabinet BTS equipment or require costly cranes to be employed, leaving coverage holes. However, many of these sites can host an Alcatel-Lucent RRH2x40-AWS installation, providing more flexible site selection and improved network quality along with greatly reduced installation time and costs.

Fast, low-cost installation and deployment

The Alcatel-Lucent RRH2x40-AWS is a zero-footprint solution and operates noise-free, simplifying negotiations with site property owners and minimizing environmental impacts. Installation can easily be done by a single person because the Alcatel-Lucent RRH2x40-AWS is compact and weighs less than 20 kg (44 lb), eliminating the need for a crane to hoist the BTS cabinet to the rooftop. A site can be in operation in less than one day — a fraction of the time required for a traditional BTS.

Excellent RF performance


Because of its small size and weight, the Alcatel-Lucent RRH2x40-AWS can be installed close to the antenna. Operators can therefore locate the Alcatel-Lucent RRH2x40-AWS where RF engineering is deemed ideal, minimizing trade-offs between available sites and RF optimum sites. The RF feeder cost and installation costs are reduced or eliminated, and there is no need for a Tower Mounted Amplifier (TMA) because losses introduced by the RF feeder are greatly reduced. The Alcatel-Lucent RRH2x40-AWS provides more RF power while at the same time consuming less electricity.




Macro

Features

- Zero-footprint deployment
- Easy installation, with a lightweight unit can be carried and set up by one person
- Optimized RF power, with flexible site selection and elimination of a TMA
- Convection-cooled (fanless)
- Noise-free
- Best-in-class power efficiency, with significantly reduced energy consumption

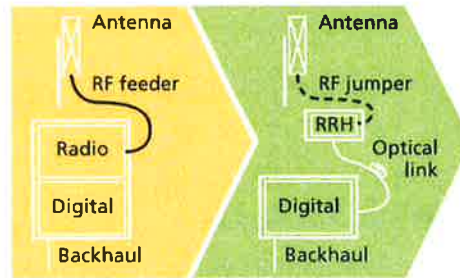

RRH for space-constrained cell sites



Distributed

Benefits

- Leverages existing real estate with lower site costs
- Reduces installation costs, with fewer installation materials and simplified logistics
- Decreases power costs and minimizes environmental impacts, with the potential for eco-sustainable power options
- Improves RF performance and adds flexibility to network planning

Technical specifications

Physical dimensions

- Height: 620 mm (24.4 in.)
- Width: 270 mm (10.63 in.)
- Depth: 170 mm (6.7 in.)
- Weight (without mounting kit): less than 20 kg (44 lb)

Power

- Power supply: -48VDC

Operating environment

- Outdoor temperature range:
 - With solar load: -40°C to +50°C (-40°F to +122°F)
 - Without solar load: -40°C to +55°C (-40°F to +131°F)

- Passive convection cooling (no fans)
- Enclosure protection
 - IP65 (International Protection rating)

RF characteristics

- Frequency band: 1700/2100 MHz (AWS); 3GPP Band 4
- Bandwidth: up to 20 MHz
- RF output power at antenna port: 40 W nominal RF power for each Tx port
- Rx diversity: 2-way or 4-way with optional Rx Diversity module
- Noise figure: below 2.0 dB typical
- Antenna Line Device features
 - TMA and Remote electrical tilt (RET) support via AISG v2.0

Optical characteristics

Type/number of fibers

- Single-mode variant
 - One Single Mode Single Fiber per RRH2x, carrying UL and DL using CWDM
 - Single mode dual fiber (SM/DF)
- Multi-mode variant
 - Two Multi-mode fibers per RRH2x: one carrying UL, the other carrying DL

Optical fiber length

- Up to 500 m (0.31 mi), using MM fiber
- Up to 20 km (12.43 mi), using SM fiber

Digital Ports and Alarms

- Two optical ports to support daisy-chaining
- Six external alarms

www.alcatel-lucent.com Alcatel, Lucent, Alcatel-Lucent and the Alcatel-Lucent logo are trademarks of Alcatel-Lucent. All other trademarks are the property of their respective owners. The information presented is subject to change without notice. Alcatel-Lucent assumes no responsibility for inaccuracies contained herein. Copyright © 2010 Alcatel-Lucent. All rights reserved. CPG2809100912 (09)



HYBRIFLEX™ RRH Hybrid Feeder Cabling Solution, 1-5/8", Single-Mode Fiber

Product Description

RFS' HYBRIFLEX Remote Radio Head (RRH) hybrid feeder cabling solution combines optical fiber and DC power for RRHs in a single lightweight aluminum corrugated cable, making it the world's most innovative solution for RRH deployments. It was developed to reduce installation complexity and costs at Cellular sites. HYBRIFLEX allows mobile operators deploying an RRH architecture to standardize the RRH installation process and eliminate the need for and cost of cable grounding. HYBRIFLEX combines optical fiber (multi-mode or single-mode) and power in a single corrugated cable. It eliminates the need for junction boxes and can connect multiple RRHs with a single feeder. Standard RFS CELLFLEX® accessories can be used with HYBRIFLEX cable. Both pre-connectorized and on-site options are available.

Features/Benefits

- ▶ Aluminum corrugated armor with outstanding bending characteristics - minimizes installation time and enables mechanical protection and shielding
- ▶ Same accessories as 1 5/8" coaxial cable
- ▶ Outer conductor grounding - eliminates typical grounding requirements and saves on installation costs
- ▶ Lightweight solution and compact design - Decreases tower loading
- ▶ Robust cabling - eliminates need for expensive cable trays and ducts
- ▶ Installation of tight bundled fiber optic cable pairs directly to the RRH - Reduces CAPEX and wind load by eliminating need for interconnection
- ▶ Optical fiber and power cables housed in single corrugated cable - Saves CAPEX by standardizing RRH cable installation and reducing installation requirements
- ▶ Outdoor polyethylene jacket - Ensures long-lasting cable protection

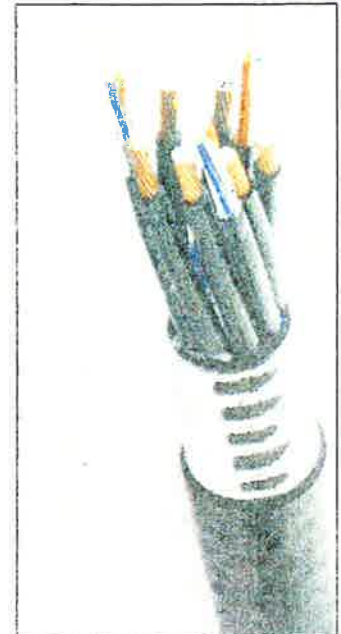


Figure 1: HYBRIFLEX Series

Technical Specifications

| | | | |
|-----------------------|--------------------------------|------------|-------------|
| Outer Conductor Armor | Corrugated Aluminum | [mm (in.)] | 46.5 (1.83) |
| Jacket | Polyethylene, PE | [mm (in.)] | 50.3 (1.98) |
| UV-Protection | Individual and External Jacket | | Yes |

| | | |
|--|----------------|------------------------|
| Weight, Approximate | [kg/m (lb/ft)] | 1.9 (1.30) |
| Minimum Bending Radius, Single Bending | [mm (in.)] | 200 (8) |
| Minimum Bending Radius, Repeated Bending | [mm (in.)] | 500 (20) |
| Recommended/Maximum Clamp Spacing | [m (ft)] | 1.0 / 1.2 (3.25 / 4.0) |

| | | |
|---|-------------------|--------------|
| DC-Resistance Outer Conductor Armor | [Ω/km (Ω/1000ft)] | 0.68 (0.205) |
| DC-Resistance Power Cable, 8.4mm²(8AWG) | [Ω/km (Ω/1000ft)] | 2.1 (0.307) |

| | | |
|---------------------------------------|-----------------------------------|------------|
| Version | Single-mode OM3 | |
| Quantity, Fiber Count | 16 (8 pairs) | |
| Core/Clad | [μm] | 50/125 |
| Primary Coating (Acrylate) | [μm] | 245 |
| Buffer Diameter, Nominal | [μm] | 900 |
| Secondary Protection, Jacket, Nominal | [mm (in.)] | 2.0 (0.08) |
| Minimum Bending Radius | [mm (in.)] | 104 (4.1) |
| Insertion Loss @ wavelength 850nm | dB/km | 3.0 |
| Insertion Loss @ wavelength 1310nm | dB/km | 1.0 |
| Standards (Meets or exceeds) | UL34-V0, UL1666 RoHS Compliant | |

| | | |
|----------------------------------|------------|---|
| Size (Power) | [mm (AWG)] | 8.4 (8) |
| Quantity, Wire Count (Power) | | 16 (8 pairs) |
| Size (Alarm) | [mm (AWG)] | 0.8 (18) |
| Quantity, Wire Count (Alarm) | | 4 (2 pairs) |
| Type | | UV protected |
| Strands | | 19 |
| Primary Jacket Diameter, Nominal | [mm (in.)] | 6.8 (0.27) |
| Standards (Meets or exceeds) | | NFPA 130, ICEA S-95-658 UL Type XHHW-2, UL 44 UL-LS Limited Smoke, UL VW-1 IEEE-383 (1974), IEEE1292/FT4 RoHS Compliant |

| | | |
|--------------------------|-----------|-------------------------|
| Installation Temperature | [°C (°F)] | -40 to +65 (-40 to 149) |
| Operation Temperature | [°C (°F)] | -40 to +65 (-40 to 149) |

* This data is provisional and subject to change

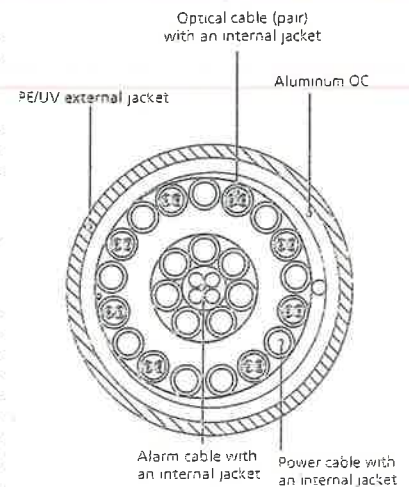


Figure 2: Construction Detail

All information contained in the present datasheet is subject to confirmation at time of ordering.

ATTACHMENT 2


Far Field Approximation
with downtilt variation

Estimated Radiated Emission
Single Emitter Far Field Model
Dipole / Wire/ Yagi Antenna Types



| | |
|------------|---------------------------|
| Location: | SHELTON NORTH, CT |
| Site #: | 5-0186 |
| Date: | 06/02/14 |
| Name: | Ryan Ulanday |
| File Name: | SHELTON NORTH, CT - FF PC |

| | |
|-----------------------|--------|
| Operating Freq. (MHz) | 869.0 |
| Antenna Height (ft) | 91.0 |
| Antenna Gain (dBi) | 16.4 |
| Antenna Size (in.) | 72.7 |
| Downtilt (degrees) | 0.0 |
| Feedline Loss (dB) | 0.0 |
| Power @ J4 (w) | 3537.0 |

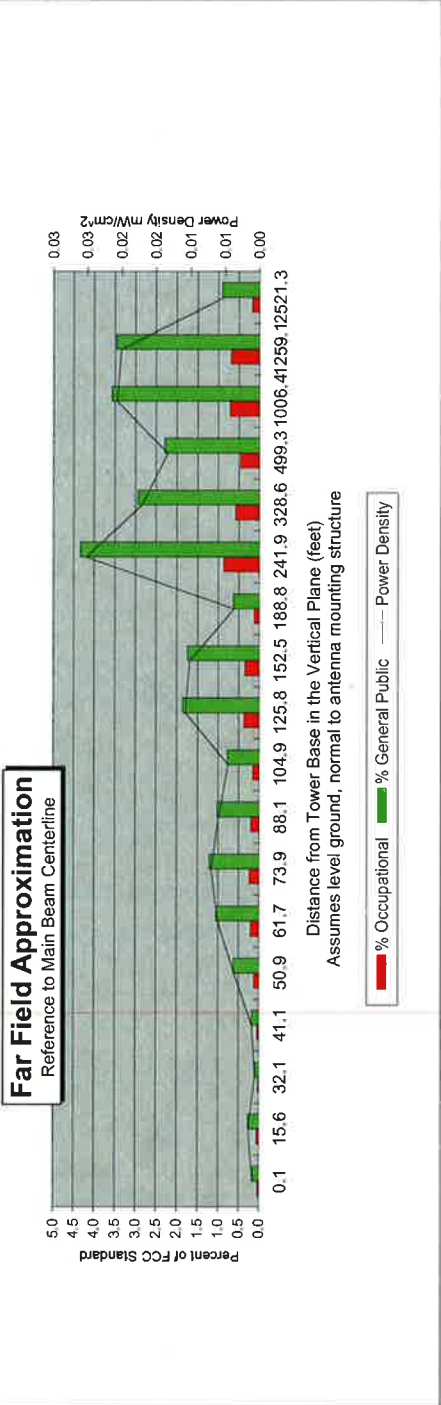

Distance from Tower Base in the Vertical Plane (feet)
Assumes level ground, normal to antenna mounting structure

Legend:
█ % Occupational
█ % General Public
 --- Power Density

This approximation is only valid in the far field, which begins at: **65.7 Feet**

| Calc Angle | 90.0 | 80.0 | 70.0 | 65.0 | 60.0 | 55.0 | 50.0 | 45.0 | 40.0 | 35.0 | 30.0 | 25.0 | 20.0 | 15.0 | 10.0 | 5.0 | 4.0 | 2.0 |
|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| Solve for r. dx to antenna | 88.0 | 89.4 | 93.7 | 97.1 | 101.6 | 107.5 | 114.9 | 124.5 | 137.0 | 153.5 | 176.1 | 208.3 | 257.4 | 340.2 | 507.0 | 1010.2 | 1262.2 | 2522.8 |
| Distance from Antenna Structure Base in Horizontal plane | 0.1 | 15.6 | 32.1 | 41.1 | 50.9 | 61.7 | 73.9 | 88.1 | 104.9 | 125.8 | 152.5 | 188.8 | 241.9 | 328.6 | 499.3 | 1006.4 | 1259.1 | #NUM! |
| Angle from Main Beam (reference to horizontal plane) | 90 | 80 | 70 | 65 | 60 | 55 | 50 | 45 | 40 | 35 | 30 | 25 | 20 | 15 | 10 | 5 | 4 | 2 |
| dB down from centerline (referenced to centerline) | 36.76 | 34.35 | 38.52 | 35.34 | 29.54 | 26.8 | 25.59 | 25.63 | 25.99 | 21.21 | 20.29 | 23.24 | 13.03 | 12.3 | 9.92 | 2 | 0.2 | 0 |
| Reflection Coefficient (1 to 4, 2.56 typical) | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 |
| Power Density (mW/cm²) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.00 | 0.03 | 0.02 | 0.01 | 0.02 | 0.02 | 0.01 |
| Percent of Occupational Standard | 0.0 | 0.1 | 0.0 | 0.0 | 0.1 | 0.2 | 0.2 | 0.2 | 0.2 | 0.4 | 0.3 | 0.1 | 0.9 | 0.6 | 0.5 | 0.7 | 0.7 | 0.2 |
| Percent of General Population Standard | 0.2 | 0.3 | 0.1 | 0.2 | 0.6 | 1.0 | 1.2 | 1.0 | 0.8 | 1.9 | 1.7 | 0.6 | 4.3 | 2.9 | 2.3 | 3.6 | 3.5 | 0.9 |

Antenna Type LNX-6514DS-A1M
Max% 4.34%

- Instructions:
- 1) Fill in Site Location, Site number, Date, Name of Person Responsible for Date, and enter File Name to be saved as.
 - 2) References to J4 refer to a point where the transmission line exits the equipment shelter and proceeds to the antenna(s). There is typically a connector located here where power measurements are made.
 - 3) Enter Antenna Height (in feet to bottom of antenna), Antenna Gain (expressed as dBi, add 2.17 to dBi to obtain dBi), Antenna Size (vertical size in inches), Downtilt (in Degrees, enter zero if none), Feedline loss from J4 to Antenna, and J4 P.
 - 4) From manufacturer's plots, or data sheet, input Angle from mainbeam and dB below mainbeam centerline.
 - 5) Enter Reflection coefficient (2.56 would be typical, 1 for free space)
 - 6) Spreadsheet calculates actual power density, then relates as Occupational or General Population percentage of FCC Standard.
 - 7) An odd distance may be entered in the rightmost column of the lower table.


**Estimated Radiated Emission
Single Emitter Far Field Model
Dipole / Wire/ Yagi Antenna Types**



Far Field Approximation
with downtilt variation

| | |
|------------|--------------------------|
| Location: | SHELTON NORTH, CT |
| Site #: | 5-0186 |
| Date: | 06/02/14 |
| Name: | Ryan Ulanday |
| File Name: | SHELTON NORTH, CT - FF P |

| | |
|-----------------------|-------|
| Operating Freq. (MHz) | 698.0 |
| Antenna Height (ft): | 91.0 |
| Antenna Gain (dBi): | 15.2 |
| Antenna Size (ft.): | 47.4 |
| Downtilt (degrees): | 0.0 |
| Feedline Loss (dB): | 0.0 |
| Power @ J4 (w): | 614.0 |

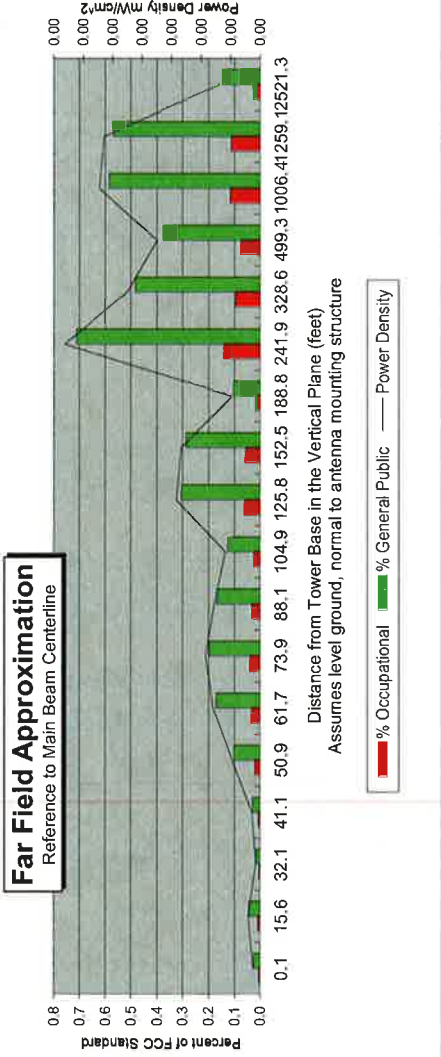

This approximation is only valid in the far field, which begins at: 28.0 Feet

**Enter Main Beam
Distance in feet below:**

| Calc Angle | 90.0 | 80.0 | 70.0 | 65.0 | 60.0 | 55.0 | 50.0 | 45.0 | 40.0 | 35.0 | 30.0 | 25.0 | 20.0 | 15.0 | 10.0 | 5.0 | 4.0 | 2.0 |
|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| Solve for r, dx to antenna | 88.0 | 89.4 | 93.7 | 97.1 | 101.6 | 107.5 | 114.9 | 124.5 | 137.0 | 153.5 | 176.1 | 208.3 | 257.4 | 340.2 | 507.0 | 1010.2 | 1262.2 | 2522.8 |
| Distance from Antenna Structure Base in Horizontal plane | 0.1 | 15.6 | 32.1 | 41.1 | 50.9 | 61.7 | 73.9 | 88.1 | 104.9 | 125.8 | 152.5 | 188.8 | 241.9 | 328.6 | 499.3 | 1006.4 | 1259.1 | 2521.3 |
| Angle from Main Beam (reference to horizontal plane) | 90 | 80 | 70 | 65 | 60 | 55 | 50 | 45 | 40 | 35 | 30 | 25 | 20 | 15 | 10 | 5 | 4 | 2 |
| dB down from centerline (referenced to centerline) | 36.76 | 34.35 | 38.52 | 35.34 | 29.54 | 26.8 | 25.59 | 25.63 | 25.99 | 21.21 | 20.29 | 23.24 | 13.03 | 12.3 | 9.92 | 2 | 0 | 0 |
| Reflection Coefficient (1 to 4, 2.56 typical) | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 |
| Power Density (mW/cm ²) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | #NUM! |
| Percent of Occupational Standard | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.0 |
| Percent of General Population Standard | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | 0.2 | 0.2 | 0.2 | 0.1 | 0.3 | 0.3 | 0.1 | 0.7 | 0.5 | 0.4 | 0.6 | 0.6 | 0.1 |

Antenna Type BXA-70063-4CF-4
Max% 0.71%

Instructions:

- 1) Fill in Site Location, Site number, Date, Name of Person Responsible for Date, and enter File Name to be saved as.
- 2) References to J4 refer to a point where the transmission line exits the equipment shelter and proceeds to the antenna(s). There is typically a connector located here where power measurements are made.
- 3) Enter Antenna Height (in feet to bottom of antenna), Antenna Gain (expressed as dBi, add 2.17 to dBi to obtain dBi), Antenna Size (vertical size in inches), Downtilt (in Degrees, enter zero if none), Feedline loss from J4 to Antenna, and J4 Power Density.
- 4) From manufacturer's plots, or data sheet, input Angle from mainbeam and dB below mainbeam centerline.
- 5) Enter Reflection coefficient (2.56 would be typical, 1 for free space)
- 6) Spreadsheet calculates actual power density, then relates as Occupational or General Population percentage of FCC Standard.
- 7) An odd distance may be entered in the rightmost column of the lower table.


Far Field Approximation
with downtilt variation

Estimated Radiated Emission
Single Emitter Far Field Model
Dipole / Wire/ Yagi Antenna Types



| | |
|------------|---------------------------|
| Location: | SHELTON NORTH, CT |
| Site #: | 5-0041 |
| Date: | 06/02/14 |
| Name: | Ryan Ulanday |
| File Name: | SHELTON NORTH, CT - FF PC |

| | |
|-----------------------|--------|
| Operating Freq. (MHz) | 1971.0 |
| Antenna Height (ft) | 91.0 |
| Antenna Gain (dBi) | 18.7 |
| Antenna Size (in.) | 71.7 |
| Downtilt (degrees) | 0.0 |
| Feedline Loss (dB) | 0.0 |
| Power @ J4 (w) | 7035.0 |

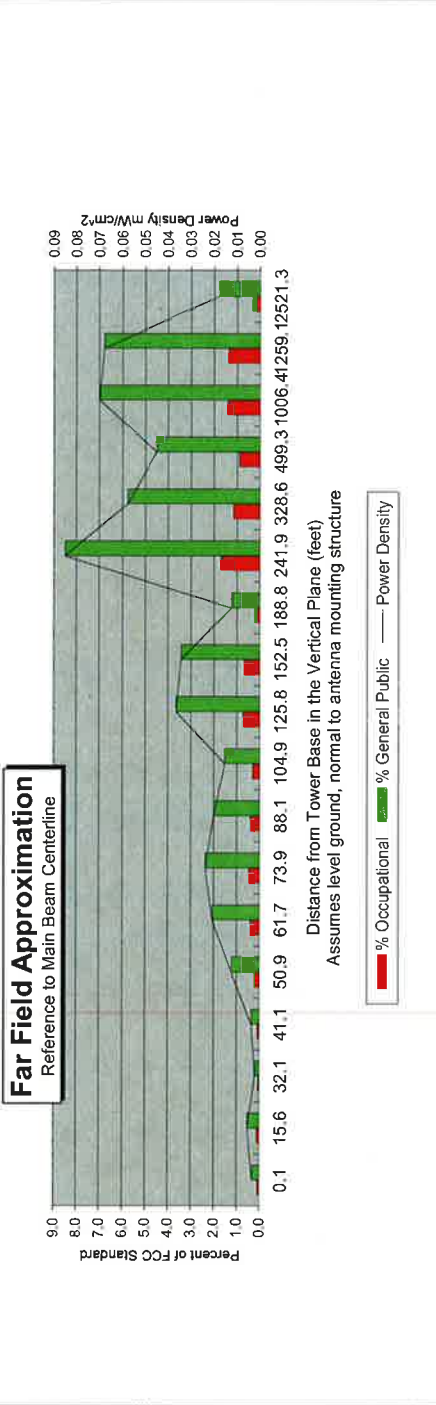

This approximation is only valid in the far field, which begins at: 63.8 Feet

Enter Main Beam
Distance in feet below:

| Calc Angle | 90.0 | 80.0 | 70.0 | 65.0 | 60.0 | 55.0 | 50.0 | 45.0 | 40.0 | 35.0 | 30.0 | 25.0 | 20.0 | 15.0 | 10.0 | 5.0 | 4.0 | 2.0 |
|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| Solve for r, dx to antenna | 88.0 | 89.4 | 93.7 | 97.1 | 101.6 | 107.5 | 114.9 | 124.5 | 137.0 | 153.5 | 176.1 | 208.3 | 257.4 | 340.2 | 507.0 | 1010.2 | 1262.2 | 2522.8 |
| Distance from Antenna Structure Base in Horizontal plane | 0.1 | 15.6 | 32.1 | 41.1 | 50.9 | 61.7 | 73.9 | 88.1 | 104.9 | 125.8 | 152.5 | 188.8 | 241.9 | 328.6 | 499.3 | 1006.4 | 1259.1 | #NUM! |
| Angle from Main Beam (reference to horizontal plane) | 90 | 80 | 70 | 65 | 60 | 55 | 50 | 45 | 40 | 35 | 30 | 25 | 20 | 15 | 10 | 5 | 4 | 2 |
| dB down from centerline (referenced to centerline) | 36.76 | 34.35 | 38.52 | 35.34 | 29.54 | 26.8 | 25.59 | 25.63 | 25.99 | 21.21 | 20.29 | 23.24 | 13.03 | 12.3 | 9.92 | 2 | 0.2 | 0 |
| Reflection Coefficient (1 to 4, 2.56 typical) | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 |
| Power Density (mW/cm²) | 0.00 | 0.01 | 0.00 | 0.00 | 0.01 | 0.02 | 0.02 | 0.02 | 0.02 | 0.04 | 0.03 | 0.01 | 0.08 | 0.06 | 0.04 | 0.07 | 0.07 | 0.02 |
| Percent of Occupational Standard | 0.1 | 0.1 | 0.0 | 0.1 | 0.2 | 0.4 | 0.5 | 0.4 | 0.3 | 0.7 | 0.7 | 0.2 | 1.7 | 1.2 | 0.9 | 1.4 | 1.4 | 0.4 |
| Percent of General Population Standard | 0.3 | 0.5 | 0.2 | 0.4 | 1.2 | 2.0 | 2.4 | 2.0 | 1.5 | 3.6 | 3.4 | 1.2 | 8.5 | 5.8 | 4.5 | 7.0 | 6.8 | 1.8 |

Antenna Type BXA-171063-12BF-EDIN-2
Max% 8.50%

Instructions:

- 1) Fill in Site Location, Site number, Date, Name of Person Responsible for Date, and enter File Name to be saved as.
- 2) References to J4 refer to a point where the transmission line exits the equipment shelter and proceeds to the antenna(s). There is typically a connector located here where power measurements are made.
- 3) Enter Antenna Height (in feet to bottom of antenna), Antenna Gain (expressed as dBi, add 2.17 to dBd to obtain dBi), Antenna Size (vertical size in inches), Downtilt (in Degrees, enter zero if none), Feedline loss from J4 to Antenna, and J4 P.
- 4) From manufacturer's plots, or data sheet, input Angle from mainbeam and dB below mainbeam centerline.
- 5) Enter Reflection coefficient (2.56 would be typical, 1 for free space)
- 6) Spreadsheet calculates actual power density, then relates as Occupational or General Population percentage of FCC Standard.
- 7) An odd distance may be entered in the rightmost column of the lower table.


Far Field Approximation
with downtilt variation

Estimated Radiated Emission
Single Emitter Far Field Model
Dipole / Wire/ Yagi Antenna Types



| | |
|------------|--------------------------|
| Location: | MONROE EAST, CT |
| Site #: | 5-0165 |
| Date: | 06/02/14 |
| Name: | Ryan Ulanday |
| File Name: | MONROE EAST, CT - FF POW |

| | |
|-----------------------|--------|
| Operating Freq. (MHz) | 2110.0 |
| Antenna Height (ft) | 97.0 |
| Antenna Gain (dBi) | 19.5 |
| Antenna Size (in.) | 76.9 |
| Downtilt (degrees) | 0.0 |
| Feedline Loss (dB) | 0.0 |
| Power @ J4 (w) | 1750.0 |

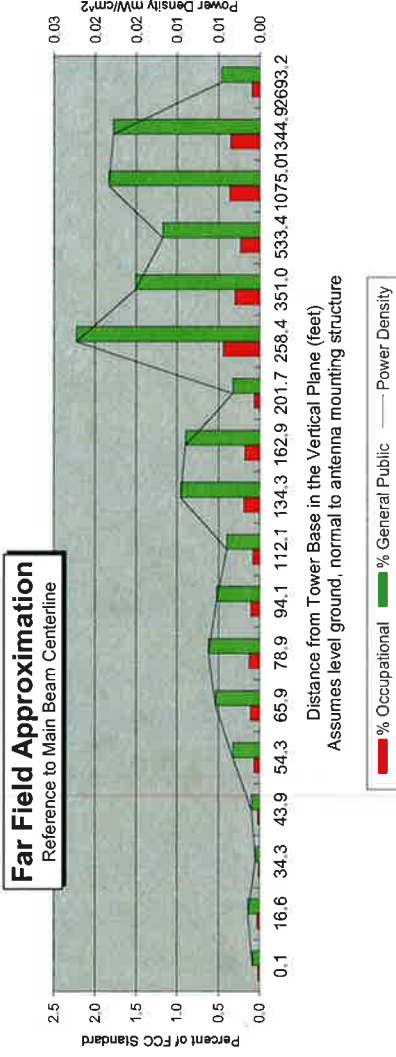

This approximation is only valid in the far field, which begins at: 73.4 Feet

Enter Main Beam
Distance in feet below:

| Calc Angle | 90.0 | 80.0 | 70.0 | 65.0 | 60.0 | 55.0 | 50.0 | 45.0 | 40.0 | 35.0 | 30.0 | 25.0 | 20.0 | 15.0 | 10.0 | 5.0 | 4.0 | 2.0 |
|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| Solve for r, dx to antenna | 94.0 | 95.5 | 100.1 | 103.7 | 108.6 | 114.8 | 122.8 | 133.0 | 146.3 | 164.0 | 188.1 | 222.5 | 275.0 | 363.4 | 541.6 | 1079.1 | 1348.2 | 2694.8 |
| Distance from Antenna Structure Base in Horizontal plane | 0.1 | 16.6 | 34.3 | 43.9 | 54.3 | 65.9 | 78.9 | 94.1 | 112.1 | 134.3 | 162.9 | 201.7 | 258.4 | 351.0 | 533.4 | 1075.0 | 1344.9 | #NUM! |
| Angle from Main Beam (reference to horizontal plane) | 90 | 80 | 70 | 65 | 60 | 55 | 50 | 45 | 40 | 35 | 30 | 25 | 20 | 15 | 10 | 5 | 4 | 2 |
| dB down from centerline (referenced to centerline) | 36.76 | 34.35 | 38.52 | 35.34 | 29.54 | 26.8 | 25.59 | 25.63 | 25.99 | 21.21 | 20.29 | 23.24 | 13.03 | 12.3 | 9.92 | 2 | 0.2 | 0 |
| Reflection Coefficient (1 to 4, 2.56 typical) | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 | 2.56 |
| Power Density (mW/cm²) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.00 | 0.02 | 0.01 | 0.02 | 0.02 | 0.00 |
| Percent of Occupational Standard | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.2 | 0.2 | 0.1 | 0.4 | 0.3 | 0.2 | 0.4 | 0.4 | 0.1 |
| Percent of General Population Standard | 0.1 | 0.1 | 0.0 | 0.1 | 0.3 | 0.5 | 0.6 | 0.5 | 0.4 | 1.0 | 0.9 | 0.3 | 2.2 | 1.5 | 1.2 | 1.8 | 1.8 | 0.5 |

Antenna Type Kathrein 742 213
Max% 2.23%

Instructions:

- 1) Fill in Site Location, Site number, Date, Name of Person Responsible for Date, and enter File Name to be saved as.
- 2) References to J4 refer to a point where the transmission line exits the equipment shelter and proceeds to the antenna(s). There is typically a connector located here where power measurements are made.
- 3) Enter Antenna Height (in feet to bottom of antenna), Antenna Gain (expressed as dBi, add 2.17 to dBi to obtain dBi), Antenna Size (vertical size in inches), Downtilt (in Degrees, enter zero if none), Feedline loss from J4 to Antenna, and J4 Pt
- 4) From manufacturer's plots, or data sheet, input Angle from mainbeam and dB below mainbeam centerline.
- 5) Enter Reflection coefficient (2.56 would be typical, 1 for free space)
- 6) Spreadsheet calculates actual power density, then relates as Occupational or General Population percentage of FCC Standard.
- 7) An odd distance may be entered in the rightmost column of the lower table.

ATTACHMENT 3



FDH Engineering, Inc., 6521 Meridien Drive Raleigh, NC 27616, Ph. 919.755.1012

**Structural Analysis for
SBA Network Services, Inc.**

118' Monopole Tower

**SBA Site Name: Shelton - North
SBA Site ID: CT46133-A-00
Verizon Site Name: Shelton North**

FDH Project Number 1423GS1400

Analysis Results

| | | |
|------------------|--------|------------|
| Tower Components | 98.2 % | Sufficient |
| Foundation | 96.6 % | Sufficient |

Prepared By:

Brandon T. Compton, EI
Project Engineer II

Reviewed By:

Bradley Newman, PE
Senior Project Engineer
CT PE License No. 29630

FDH Engineering, Inc.
6521 Meridien Drive
Raleigh, NC 27616
(919) 755-1012
info@fdh-inc.com



April 11, 2014

Prepared pursuant to TIA/EIA-222-F Structural Standards for Steel Antenna Towers and Antenna Supporting Structures and 2005 Connecticut State Building Code

TABLE OF CONTENTS

EXECUTIVE SUMMARY 3

 Conclusions..... 3

 Recommendations 3

APPURTENANCE LISTING 4

RESULTS..... 5

GENERAL COMMENTS..... 6

LIMITATIONS 6

APPENDIX 7

EXECUTIVE SUMMARY

At the request of SBA Network Services, Inc., FDH Engineering, Inc. performed a structural analysis of the monopole located in Shelton, CT to determine whether the tower is structurally adequate to support both the existing and proposed loads pursuant to the *Structural Standards for Steel Antenna Towers and Antenna Supporting Structures, TIA/EIA-222-F* and the *2005 Connecticut State Building Code (CSBC)*. Information pertaining to the existing/proposed antenna loading, current tower geometry, geotechnical data, and member sizes was obtained from:

- ❑ Paul J. Ford (Job No. 29200-1700) original design drawings dated November 15, 2000
- ❑ Dr. Clarence Welti, PE, PC (Site No. CT-0921) Geotechnical Study for Nextel Communications Tower, CT-0921 dated June 5, 2000
- ❑ FDH Engineering, Inc. (Project No. 1423GS1400) Modification Drawings for a 118' Monopole Tower dated April 11, 2014
- ❑ SBA Network Services, Inc.

The *basic design wind speed* per the *TIA/EIA-222-F* standards and the *2005 CSBC* is 85 mph without ice and 38 mph with 3/4" radial ice. Ice is considered to increase in thickness with height.

Conclusions

With the existing and proposed antennas from Verizon in place at 98 ft, the tower meets the requirements of the *TIA/EIA-222-F* standards and the *2005 CSBC* provided the **Recommendations** listed below are satisfied. Furthermore, provided the foundation was constructed per the original design drawings (see Paul J. Ford Job No. 29200-1700), and utilizing the existing soil parameters (see Dr. Clarence Welti, PE, PC Geotechnical Study for Nextel Communications Tower, CT-0921), the foundations should have the necessary capacity to support the existing and proposed loading. For a more detailed description of the analysis of the tower, see the **Results** section of this report.

Our structural analysis has been performed assuming all information provided to FDH Engineering, Inc. is accurate (i.e., the steel data, tower layout, existing antenna loading, and proposed antenna loading) and that the tower has been properly erected and maintained per the original design drawings.

Recommendations

To ensure the requirements of the *TIA/EIA-222-F* standards and the *2005 CSBC* are met with the existing and proposed loading in place, we have the following recommendations:

1. The proposed coax should be installed inside the pole's shaft.
2. Modifications per FDH Engineering, Inc. (Project No. 1423GS1400) Modification Drawings for a 118' Monopole Tower dated April 11, 2014 must be installed correctly for this analysis to be valid.

APPURTENANCE LISTING

The proposed and existing antennas with their corresponding cables/coax lines are shown in **Table 1**. *If the actual layout determined in the field deviates from the layout, FDH Engineering, Inc. should be contacted to perform a revised analysis.*

Table 1 - Appurtenance Loading

Existing Loading:

| Antenna Elevation (ft) | Description | Feedlines | Carrier | Mount Elevation (ft) | Mount Type |
|------------------------|---|--|---------|----------------------|---------------------------|
| 120 | (3) RFS APXVSP18-C-A20 (6) Decibel DB844H90E-XY (3) Andrew 932LG65VTE-B (3) Alcatel Lucent 1900 RRH (25MHz) (3) Alcatel Lucent 800 RRHs (3) Alcatel Lucent External Notch Filters (6) RFS 1900 ACU-A20-N RETs (3) RFS 800 ACU-A20-N RETs | (9) 1-1/4" (6) 1-5/8" | Sprint | 118 | (1) Platform w/ Handrails |
| 108 | (3) Kathrein 800-10121 (3) Powerwave P65-16-XLH-RR (6) Powerwave LGP21401 TMAs (6) Ericsson RRUS-11 RRUs (3) REC/RETs (1) Raycap DC6-48-60-18-8CF | (6) 1-1/4" (1) 1/2" (1) 3/8" (2) 5/8" | AT&T | 108 | (1) Low Profile Platform |
| 98 | (3) Antel BXA-70063/4CF (3) Antel BXA-171063-12BF (6) Antel LPA-80063/4CF (6) RFS FD9R6004/2C-3L Diplexers | (12) 1-5/8" | Verizon | 98 | (1) Low Profile Platform |

Proposed Loading:

| Antenna Elevation (ft) | Description | Feedlines | Carrier | Mount Elevation (ft) | Mount Type |
|------------------------|--|---------------------------------|---------|----------------------|--------------------------|
| 98 | (3) Antel BXA-70063/4CF (3) Antel BXA-171063-12BF (3) Andrew HBX-6517DS-VTM (3) Andrew LNX-6514DS-VTM (3) Alcatel Lucent RRH 2X40-AWS RRHs (1) RFS DB-T1-6Z-8AB-0Z Distribution Box (6) RFS FD9R6004/2C-3L Diplexers | (12) 1-5/8" (1) 1-5/8" Fiber | Verizon | 98 | (1) Low Profile Platform |

RESULTS

The following yield strength of steel for individual members was used for analysis:

Table 2 - Material Strength

| Member Type | Yield Strength |
|----------------------|----------------|
| Tower Shaft Sections | 65 ksi |
| Base Plate | 50 ksi |
| Anchor Bolts | 75 ksi |

Table 3 displays the summary of the ratio (as a percentage) of force in the member to their capacities. Values greater than 100% indicate locations where the maximum force in the member exceeds its capacity. **Table 4** displays the maximum foundation reactions.

If the assumptions outlined in this report differ from actual field conditions, FDH Engineering, Inc. should be contacted to perform a revised analysis. Furthermore, as no information pertaining to the allowable twist and sway requirements for the existing or proposed appurtenances was provided, deflection and rotation were not taken into consideration when performing this analysis.

See the **Appendix** for detailed modeling information

Table 3 - Summary of Working Percentage of Structural Components

| Section No. | Elevation ft | Component Type | Size | % Capacity | Pass Fail |
|-------------|---------------|-----------------------|--|------------|-----------|
| L1 | 118 - 84.67 | Pole | TP28.765x22x0.1875 | 91.1 | Pass |
| | 84.67 - 77 | Pole w/ Modifications | TP28.765x22x0.1875 w/ Flat Plate Reinforcement | 53.4 | Pass |
| L2 | 77 - 40.75 | Pole | TP34.371x27.7713x0.3125 | 95.4 | Pass |
| L3 | 40.75 - 17.16 | Pole | TP40.47x33.0448x0.375 | 98.2 | Pass |
| | 17.16 - 0 | Pole w/ Modifications | TP40.47x33.0448x0.375 w/ Flat Plate Reinforcement | 78.0 | Pass |
| - | 0 | Anchor Bolts | (12) 2.25" Ø on a 48" BC | 89.9 | Pass |
| - | 0 | Base Plate | PL 3.25" x 46" Sq. | 75.5 | Pass |

Table 4 - Maximum Base Reactions

| Base Reactions | Current Analysis* (TIA/EIA-222-F) | Original Design (TIA/EIA-222-F) |
|----------------|--------------------------------------|------------------------------------|
| Axial | 26 k | 20.5 k |
| Shear | 24 k | 24.0 k |
| Moment | 2,130 k-ft | 2,040 k-ft |

*Foundation determined adequate per independent analysis.

GENERAL COMMENTS


This engineering analysis is based upon the theoretical capacity of the structure. It is not a condition assessment of the tower and its foundation. It is the responsibility of SBA Network Services, Inc. to verify that the tower modeled and analyzed is the correct structure (with accurate antenna loading information) modeled. If there are substantial modifications to be made or the assumptions made in this analysis are not accurate, FDH Engineering, Inc. should be notified immediately to perform a revised analysis.

LIMITATIONS

All opinions and conclusions are considered accurate to a reasonable degree of engineering certainty based upon the evidence available at the time of this report. All opinions and conclusions are subject to revision based upon receipt of new or additional/updated information. All services are provided exercising a level of care and diligence equivalent to the standard and care of our profession. No other warranty or guarantee, expressed or implied, is offered. Our services are confidential in nature and we will not release this report to any other party without the client's consent. The use of this engineering work is limited to the express purpose for which it was commissioned and it may not be reused, copied, or distributed for any other purpose without the written consent of FDH Engineering, Inc.

APPENDIX

| | | | |
|--------------------|---------|---------|---------|
| Section | 1 | 2 | 3 |
| Length (ft) | 41.00 | 40.00 | 45.00 |
| Number of Sides | 12 | 12 | 12 |
| Thickness (in) | 0.1875 | 0.3125 | 0.3750 |
| Socket Length (ft) | 3.75 | 4.25 | 33.0448 |
| Top Dia (in) | 22.0000 | 27.7712 | 40.4700 |
| Bot Dia (in) | 28.7650 | 34.3710 | |
| Grade | | A572-65 | |
| Weight (K) | 2.1 | 4.2 | 6.7 |

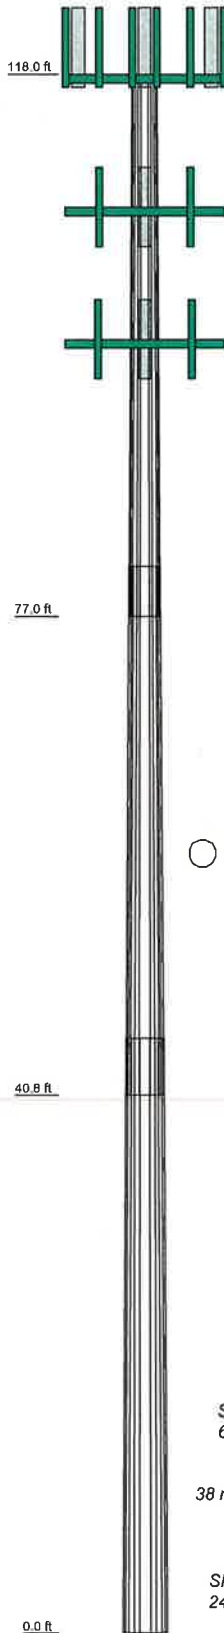

DESIGNED APPURTENANCE LOADING


| TYPE | ELEVATION | TYPE | ELEVATION |
|--------------------------------|-----------|-------------------------------|-----------|
| Lightning Rod | 118 | (2) LGP21401 TMA | 108 |
| APXVSP18-C-A20 w/ Mount Pipe | 118 | (2) LGP21401 TMA | 108 |
| APXVSP18-C-A20 w/ Mount Pipe | 118 | (2) LGP21401 TMA | 108 |
| APXVSP18-C-A20 w/ Mount Pipe | 118 | (2) RRUS-11 | 108 |
| (2) DB844H90E-XY w/ Mount Pipe | 118 | (2) RRUS-11 | 108 |
| (2) DB844H90E-XY w/ Mount Pipe | 118 | (2) RRUS-11 | 108 |
| (2) DB844H90E-XY w/ Mount Pipe | 118 | REC/RET | 108 |
| 932LG65VTE-B w/ Mount Pipe | 118 | REC/RET | 108 |
| 932LG65VTE-B w/ Mount Pipe | 118 | REC/RET | 108 |
| 932LG65VTE-B w/ Mount Pipe | 118 | DC6-48-60-18-8CF | 108 |
| ALU 1900 RRH (25Mhz) | 118 | Low Profile Platform | 108 |
| ALU 1900 RRH (25Mhz) | 118 | BXA-70063/4CF w/ Mount Pipe | 98 |
| ALU 1900 RRH (25Mhz) | 118 | BXA-70063/4CF w/ Mount Pipe | 98 |
| ALU 800 RRH | 118 | BXA-70063/4CF w/ Mount Pipe | 98 |
| ALU 800 RRH | 118 | HBX-6517DS-VTM w/ Mount Pipe | 98 |
| ALU 800 RRH | 118 | HBX-6517DS-VTM w/ Mount Pipe | 98 |
| ALU 800 RRH | 118 | HBX-6517DS-VTM w/ Mount Pipe | 98 |
| ALU External Notch Filter | 118 | HBX-6517DS-VTM w/ Mount Pipe | 98 |
| ALU External Notch Filter | 118 | BXA-171063-12BF w/ Mount Pipe | 98 |
| ALU External Notch Filter | 118 | BXA-171063-12BF w/ Mount Pipe | 98 |
| (2) 1900 ACU-A20-N | 118 | BXA-171063-12BF w/ Mount Pipe | 98 |
| (2) 1900 ACU-A20-N | 118 | LNx-6514DS-VTM w/ Mount Pipe | 98 |
| (2) 1900 ACU-A20-N | 118 | LNx-6514DS-VTM w/ Mount Pipe | 98 |
| 800 ACU-A20-N | 118 | LNx-6514DS-VTM w/ Mount Pipe | 98 |
| 800 ACU-A20-N | 118 | LNx-6514DS-VTM w/ Mount Pipe | 98 |
| 800 ACU-A20-N | 118 | RRH2X40-AWS | 98 |
| Platform w/ Handrails | 118 | RRH2X40-AWS | 98 |
| 800-10121 w/ Mount Pipe | 108 | RRH2X40-AWS | 98 |
| 800-10121 w/ Mount Pipe | 108 | (2) FD9R8004/2C-3L Diplexer | 98 |
| 800-10121 w/ Mount Pipe | 108 | (2) FD9R8004/2C-3L Diplexer | 98 |
| 800-10121 w/ Mount Pipe | 108 | (2) FD9R8004/2C-3L Diplexer | 98 |
| P65-16-XLH-RR w/ Mount Pipe | 108 | DB-T1-6Z-8AB-0Z | 98 |
| P65-16-XLH-RR w/ Mount Pipe | 108 | Low Profile Platform | 98 |
| P65-16-XLH-RR w/ Mount Pipe | 108 | | |


MATERIAL STRENGTH

| GRADE | Fy | Fu | GRADE | Fy | Fu |
|---------|--------|--------|-------|----|----|
| A572-65 | 65 ksi | 80 ksi | | | |

TOWER DESIGN NOTES

1. Tower is located in Fairfield County, Connecticut.
2. Tower designed for a 85 mph basic wind in accordance with the TIA/EIA-222-F Standard.
3. Tower is also designed for a 38 mph basic wind with 0.75 in ice. Ice is considered to increase in thickness with height.
4. Deflections are based upon a 50 mph wind.



| | | | | |
|---|--|--|---|---|
|  Tower Analysis | FDH Engineering, Inc. 6521 Meridien Drive Raleigh, NC 27616 Phone: (919) 755-1012 FAX: (919) 755-1031 | Job: Shelton-north CT46133-A-00 Project: 1423GS1400 Client: SBA Network Services, Inc. Code: TIA/EIA-222-F Path: | Drawn by: Brandon Comptor Date: 04/11/14 | App'd: Scale: NTS Dwg No. E-1 |
|---|--|--|---|---|

POST CONSTRUCTION INSPECTION NOTES:

GENERAL

1. THE POST CONSTRUCTION INSPECTION (PCI) IS A VISUAL INSPECTION OF TOWER MODIFICATIONS AND A REVIEW OF CONSTRUCTION INSPECTIONS AND OTHER REPORTS TO ENSURE THE INSTALLATION WAS CONSTRUCTED IN ACCORDANCE WITH THE CONTRACT DOCUMENTS, NAMELY THE MODIFICATION DRAWINGS, AS DESIGNED BY THE ENGINEER OF RECORD (EOR).
2. THE PCI IS TO CONFIRM INSTALLATION CONFIGURATION AND WORKMANSHIP ONLY AND IS NOT A REVIEW OF THE MODIFICATION DESIGN ITSELF, NOR DOES THE PCI INSPECTOR TAKE OWNERSHIP OF THE MODIFICATION DESIGN. OWNERSHIP OF THE STRUCTURAL MODIFICATION DESIGN EFFECTIVENESS AND INTEGRITY RESIDES WITH THE EOR AT ALL TIMES.
3. ALL PCIS SHALL BE CONDUCTED BY A PCI INSPECTOR THAT IS APPROVED TO PERFORM ELEVATED WORK FOR FDH ENGINEERING, INC.
4. TO ENSURE THAT THE REQUIREMENTS OF THE PCI ARE MET, IT IS VITAL THAT THE GENERAL CONTRACTOR (GC) AND THE PCI INSPECTOR BE IN CLOSE COMMUNICATING AND COORDINATING AS SOON AS A PO IS RECEIVED. IT IS EXPECTED THAT EACH PARTY WILL BE PROACTIVE IN REACHING OUT TO THE OTHER PARTY. IF CONTACT INFORMATION IS NOT KNOWN, CONTACT YOUR FDH POINT OF CONTACT (POC).
5. REFER TO CSR-01 : CONTRACTOR CLOSEOUT REQUIREMENTS FOR FURTHER DETAILS AND REQUIREMENTS.

PCI INSPECTOR

1. THE PCI INSPECTOR IS REQUIRED TO CONTACT THE GC AS SOON AS RECEIVING A PO FOR THE PCI TO, AT A MINIMUM:
 - REVIEW THE REQUIREMENTS OF THE PCI CHECKLIST
 - WORK WITH THE GC TO DEVELOP A SCHEDULE TO CONDUCT ON-SITE INSPECTIONS, INCLUDING FOUNDATION INSPECTIONS
2. THE PCI INSPECTOR IS RESPONSIBLE FOR COLLECTING ALL GENERAL CONTRACTOR (GC) INSPECTION AND TEST REPORTS, REVIEWING THE DOCUMENTS FOR ADHERENCE TO THE CONTRACT DOCUMENTS, CONDUCTING THE IN-FIELD INSPECTIONS, AND SUBMITTING THE PCI REPORT TO FDH.

CORRECTION OF FAILING PCIS

1. IF THE MODIFICATION INSTALLATION WOULD FAIL THE PCI ("FAILED PCI"), THE GC SHALL WORK WITH FDH TO COORDINATE A REMEDIATION PLAN IN ONE OF TWO WAYS:
 - CORRECT FAILING ISSUES TO COMPLY WITH THE SPECIFICATIONS CONTAINED IN THE ORIGINAL CONTRACT DOCUMENTS AND COORDINATE A SUPPLEMENT PCI
 - OR, WITH FDH'S APPROVAL, THE GC MAY WORK WITH THE EOR TO RE-ANALYZE THE MODIFICATION/REINFORCEMENT USING THE AS-BUILT CONDITION.

REQUIRED PHOTOS

1. BETWEEN THE GC AND THE PCI INSPECTOR THE FOLLOWING PHOTOGRAPHS, AT A MINIMUM, ARE TO BE TAKEN AND INCLUDED IN THE PCI REPORT:
 - PRE-CONSTRUCTION GENERAL SITE CONDITION
 - PHOTOGRAPHS DURING THE REINFORCEMENT MODIFICATION CONSTRUCTION/ERECTION
 - RAW MATERIALS
 - PHOTOS OF ALL CRITICAL DETAILS
 - FOUNDATION MODIFICATIONS
 - REBAR INSTALLATION AND TORQUE
 - BOLT INSTALLATION AND TORQUE
 - FINAL INSTALLED CONDITION
 - SURFACE COATING REPAIR
 - POST CONSTRUCTION PHOTOGRAPHS
 - FINAL INFELD CONDITION
2. PHOTOS OF ELEVATED MODIFICATIONS TAKEN FROM THE GROUND SHALL BE CONSIDERED INADEQUATE.

| PCI CHECKLIST | |
|---|---|
| CONSTRUCTION/INSTALLATION INSPECTION/TESTING REQUIRED | REPORT ITEM |
| PRE-CONSTRUCTION | |
| X | PCI CHECKLIST DRAWING |
| N/A | EOR APPROVED SHOP DRAWINGS |
| N/A | FABRICATION INSPECTION |
| N/A | FABRICATOR CERTIFIED WELD INSPECTION |
| X | MATERIAL TEST REPORT (MTR) |
| N/A | FABRICATOR NDE INSPECTION |
| N/A | NDE REPORT OF MONOPOLE BASE PLATE (AS REQUIRED) |
| X | PACKING SLIPS |
| ADDITIONAL TESTING AND INSPECTIONS: | |
| CONSTRUCTION | |
| X | CONSTRUCTION INSPECTIONS |
| N/A | FOUNDATION INSPECTIONS |
| N/A | CONCRETE COMP. STRENGTH AND SLUMP TESTS |
| N/A | POST INSTALLED ANCHOR ROD VERIFICATION |
| N/A | BASE PLATE GROUT VERIFICATION |
| X | CONTRACTOR'S CERTIFIED WELD INSPECTION |
| N/A | EARTHWORK: LIFT AND DENSITY |
| X | ON SITE COLD GALVANIZING VERIFICATION |
| N/A | GUY WIRE TENSION REPORT |
| X | GC AS-BUILT DOCUMENTS |
| ADDITIONAL TESTING AND INSPECTIONS: | |
| POST-CONSTRUCTION | |
| X | PCI INSPECTOR REDLINE OR RECORD DRAWING(S) |
| N/A | POST INSTALLED ANCHOR ROD PULL-OUT TESTING |
| X | PHOTOGRAPHS |
| ADDITIONAL TESTING AND INSPECTIONS: | |

NOTE: X DENOTES A DOCUMENT NEEDED FOR THE PCI REPORT
 N/A DENOTES A DOCUMENT THAT IS NOT REQUIRED FOR THE PCI REPORT

PREPARED BY:

 601 MEMPHIS DRIVE
 PHOENIX 08-155-0112
 FAX: 918-755-1031

PREPARED FOR:

 3000 BIRDSEYE ROAD, FARMINGTON, NH
 06031-4377-3417

 BRADLEY R. NEWMAN, P.E.
 CONNECTICUT LIC. NO. 21889

WJD
 DRAWN BY:
 BTC
 CHECKED BY:
 BRN
 ENG. APP'D:
 PROJECT NO.: 1423051-400

| SUBMITTALS | |
|------------|--------------|
| DATE | REVISION |
| 09/17/14 | CONSTRUCTION |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

THE INFORMATION CONTAINED IN THIS SET OF DOCUMENTS IS PROPRIETARY BY NATURE. REPRODUCTION OR CAUSING TO BE REPRODUCED THE WHOLE OR ANY PART THEREOF WITHOUT THE EXPRESS PERMISSION OF FDH ENGINEERING, INC. IS PROHIBITED.

SITE NAME:
 SHELTON-NORTH

SITE NUMBER:
 CT146133-A-00

SITE ADDRESS:
 162 BIRDSEYE RD.
 SHELTON, CT 06484

SHEET TITLE
 POST CONSTRUCTION
 INSPECTION NOTES

SHEET NUMBER
 N-1

PREPARED BY:




FDH ENGINEERING INNOVATION
 200 WILSON AVENUE, SUITE 200
 WESTFIELD, MA 01095
 PHONE: 413-753-0012
 FAX: 413-753-1011

RETRACTED FOR:



SBA
 200 WILSON AVENUE, SUITE 200
 WESTFIELD, MA 01095
 PHONE: 413-753-0012
 FAX: 413-753-1011



BRADLEY R. NEWMAN, P.E.
 CONNECTICUT LIC. NO. 24930
 DRAWN BY: WJD
 CHECKED BY: BTC
 ENG. APPROV.: BRN
 PROJECTING: 1432051400

| DATE | DESCRIPTION | REV |
|----------|--------------|-----|
| 04/11/14 | CONSTRUCTION | 0 |
| | | 1 |

THE INFORMATION CONTAINED IN THIS SET OF DOCUMENTS IS PROPRIETARY TO FDH ENGINEERING, INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF FDH ENGINEERING, INC. IS PROHIBITED.

SITE NAME:
 SHELTON-NORTH

SITE NUMBER:
 CT46133-A-00

SITE ADDRESS:
 162 BIRDSEYE RD.
 SHELTON, CT 06484

SHEET TITLE
 GENERAL NOTES

SHEET NUMBER
 N-2

NEW FLAT PLATE REINFORCEMENT NOTES:


- CONTRACTOR TO FIELD VERIFY PROPOSED LOCATION OF FLAT PLATE TO ENSURE THAT PROPER SPACING CAN BE MET.
- CLIMBING PEGS THAT INTERFERE WITH THE INSTALLATION OF FLAT PLATE.
- ALL AJAX CONNECTIONS TO USE HIGH TENSILE SLEEVE PROVIDED BY MANUFACTURER. AJAX BOLT ASSEMBLY TO BE INSTALLED PER MANUFACTURER'S SPECIFICATIONS. SEE AJAX BOLT ASSEMBLY DETAIL BELOW.
- ALL SHEAR SLEEVES TO BE HOT DIPPED GALVANIZED PRIOR TO INSTALLATION.
- NEW FLAT PLATES TO BE INSTALLED ON THE CENTER OF THE PROPOSED SIDE UNLESS OTHERWISE NOTED.
- PRIOR TO FLAT PLATE INSTALLATION, SLIP JOINTS MUST BE TIGHTENED WITH A MINIMUM JACKING FORCE OF 6000 LBS.
- EXISTING COAX BANDS TO BE REPLACED AFTER FLAT PLATE INSTALLATION. NEW FLAT PLATE TO BE INSTALLED BENEATH EXISTING COAX BANDS.

PRE-TENSION BOLTS:

- ALL DIRECT TENSION INDICATOR (DTI) WASHERS SHALL BE THE "SOURTHERN STYLE" AS MANUFACTURED BY:
 APPLIED BOLTING TECHNOLOGY PRODUCTS, INC.
 1413 ROCKINGHAM ROAD
 BELLOW FALLS, VERMONT 05101, USA
 WEBSITE: WWW.APPLIEDBOLTING.COM
- USE DIRECT TENSION INDICATOR (DTI) WASHERS COMPATIBLE WITH 3/4" NOMINAL A325 BOLTS FOR THE AJAX M20 BOLTS. DTI'S SHALL NOT BE HOT-DIPPED GALVANIZED. DTI'S SHALL BE RECOMMENDED (AS AVAILABLE) BY THE CHIEF MECHANICAL PROCESS ONLY AS PROVIDED BY THE DTI MANUFACTURER.
- USE HARDENED WASHER FOR A 3/4" NOMINAL BOLT BETWEEN THE TOP OF DIRECT TENSION INDICATOR (DTI) WASHER AND THE NUT OF THE AJAX M20 BOLT. HARDENED WASHERS SHALL CONFORM TO THE REQUIREMENTS OF ASTM A308. HARDENED WASHERS SHALL BE HIGHER THAN THE HARDENED WASHERS SHALL BE MECHANICALLY GALVANIZED BY COLD MECHANICAL PROCESS. ALTERNATIVELY, CORRECTLY MADE HOT DIPPED GALVANIZED HARDENED FLAT WASHERS HAVING A MINIMUM HARDNESS OF RC 38 CAN BE USED. DOCUMENTATION OF HARDNESS SPECIFICATION AND HARDNESS.

SURFACE PREPARATION:

- PREPARE SURFACE TO BE WELDED BY REMOVING PAINT OR GALVANIZATION TO BARE METAL USING POWER WIRE BRUSHING IN ACCORDANCE WITH SSPC-SP11, (STEEL STRUCTURES PAINTING COUNCIL), FOLLOWING POWER WIRE BRUSHING CONTRACTOR SHALL POLISH METAL SURFACE WITH HIGH SPEED GRINDER WITH 400+ GRIT SANDPAPER.
- STIFFENER PLATE WELDING:
 1. ALL WELDING TO THE EXISTING TOWER SHALL BE PERFORMED BY CERTIFIED WELDERS UTILIZING PROCEDURES QUALIFIED IN ACCORDANCE WITH AWS D1.1 AND AWS C3.1.
 2. CONTRACTOR SHALL COMPLY WITH AWS D1.1 FOR PROCEDURES, APPEARANCE AND QUALITY OF WELDS AND FOR METHODS USED IN CORRECTING WELDING. ALL WELDERS AND WELDING INSPECTION PERSONNEL SHALL BE QUALIFIED IN ACCORDANCE WITH AWS "STANDARD QUALIFICATION PROCEDURES". CONTRACTOR SHALL SUBMIT CERTIFICATION OF WELDERS TO THE ENGINEER PRIOR TO COMMENCEMENT OF THE WORK.
 3. CONTRACTOR RESPONSIBLE FOR TEMPORARY HEAT SHIELDING AS REQUIRED DURING WELDING.
 4. ALL WELDS TO BE VISUALLY INSPECTED BY A CERTIFIED WELD INSPECTOR PER AWS D1.1.
 5. CONTRACTOR RESPONSIBLE FOR VIEWING EXISTING POLE FOR LOOSE AND FLAMMABLE MATERIAL PRIOR TO WELDING FLAT PLATE.
 6. CONTRACTOR TO VERIFY LOCATION OF ENTRY PORTHOLES PRIOR TO STIFFENER OR TRANSFER PLATE INSTALLATION.



SCALE: NTS

AJAX BOLT ASSEMBLY

STEEL:

- ALL STRUCTURAL STEEL SHALL BE FABRICATED AND ERECTED IN ACCORDANCE WITH THE LATEST AISC CODE AND ASTM SPECIFICATIONS.
 *ALL STEEL FLAT PLATE SHALL BE ASTM A372-65 (F_y=65KSI) UNLESS OTHERWISE SPECIFIED.
- ALL CONNECTIONS OF STRUCTURAL STEEL MEMBERS SHALL BE MADE USING SPECIFIED WELDS WITH WELDING ELECTRODES E-80XX OR SPECIFIED HIGH STRENGTH BOLTS TO BE ASTM A325N, THREAD INCLUDED WITH SHEAR PLANE (UNLESS OTHERWISE NOTED).
- ALL BOLTED CONNECTIONS TO BE INSTALLED TO A SNUG-TIGHTENED CONDITION IN ACCORDANCE WITH AISC 13 PART 16.2. SPECIFICATION FOR STRUCTURAL JOINTS USING ASTM A325 OR A440 BOLTS. SECTION B.1, UNLESS OTHERWISE SPECIFIED. WHEN "X" TYPE BOLTS ARE USED, CONTRACTOR MAY BE REQUIRED TO STACK ADDITIONAL NUTS. ALL NUTS SHALL BE HEAVY HEX UNLESS OTHERWISE NOTED.
- ALL STEEL, AFTER FABRICATION, SHALL BE HOT DIPPED GALVANIZED. AUTHORIZED NON-GALVANIZED MEMBERS OR PARTS (EXISTING OR NEW) SHALL BE PAINTED WITH MULTIPLE COATS OF ZRC COLD GALVANIZING COMPOUND ACHIEVING A MINIMUM OF 4 MILS DRY FILM PER ASTM A 780.
- ALL SHOP AND FIELD WELDING SHALL BE DONE BY WELDERS QUALIFIED AS DESCRIBED IN THE "AMERICAN WELDING SOCIETY'S STANDARD QUALIFICATION PROCEDURE" TO PERFORM THE TYPE OF WORK REQUIRED. CONTRACTOR IS REQUIRED TO PROVIDE FDH ENGINEERING, INC. WITH A PASSING CERTIFIED WELDING INSPECTION FOR ALL WELDS.
- STRUCTURAL STEEL MAY NOT BE TORCH CUT FOR FABRICATION. ALL STEEL FABRICATION MUST FOLLOW AISC STANDARDS.

MISC. NOTES:

- ALL MODIFICATIONS ARE ASSUMED TO BE MADE ON AN EMPTY TOWER. CONTRACTOR IS RESPONSIBLE TO MAKE PROVISIONS TO SUPPORT OR WORK AROUND EXISTING ANTENNAS AND THROUGH ALL AREAS SHOWN.
- CONTRACTOR FIELD VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION.
- ALL DIMENSIONS ARE PRELIMINARY UNTIL FIELD VERIFIED BY CONTRACTOR. ANY CHANGES MUST BE APPROVED BY ENGINEER AND RECORDED IN WRITING PRIOR TO FABRICATION AND INSTALLATION.

FABRICATION NOTES:

- CONTRACTOR WISHES TO FURNISH OR USE A SUBSTITUTE FOR THE GENERAL DESIGN, CONTRACTOR MUST MAKE WRITTEN APPLICATION TO ENGINEER OF RECORD FOR ACCEPTANCE THEREOF. CERTIFYING THAT THE PROPOSED SUBSTITUTE WILL PERFORM ADEQUATELY THE FUNCTIONS AND ACHIEVE THE RESULTS CALLED FOR BY THE GENERAL DESIGN. THE SAME USE AS THAT SPECIFIED. ALL VARIATIONS OF THE PROPOSED SUBSTITUTE FROM THAT SPECIFIED WILL BE IDENTIFIED IN THE APPLICATION AND AVAILABLE MAINTENANCE, REPAIR AND REPLACEMENT SERVICE WILL BE INDICATED. THE ALL COSTS OR CREDITS THAT WILL RESULT DIRECTLY OR INDIRECTLY FROM ACCEPTANCE OF SUCH SUBSTITUTE INCLUDING COSTS OF REDESIGN AND CLAIMS OF OTHER CONTRACTORS SHALL BE COVERED BY ENGINEER OF RECORD. IF EVALUATION OF THE PROPOSED SUBSTITUTE, ENGINEER OF RECORD MAY REQUIRE CONTRACTOR TO FURNISH ADDITIONAL DATA ABOUT THE PROPOSED SUBSTITUTE.

GENERAL NOTES:

- ALL WORK SHALL BE DONE IN ACCORDANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL CODES AND ORDINANCES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO OBTAIN ALL PERMITS NECESSARY TO COMPLETE THE PROJECT AND ABIDE BY ALL CONDITIONS AND REQUIREMENTS OF THE PERMITS.
- CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFICATION OF THE FEDERAL, STATE AND LOCAL CODES AND ORDINANCES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO OBTAIN ALL PERMITS NECESSARY TO COMPLETE THE PROJECT AND ABIDE BY ALL CONDITIONS AND REQUIREMENTS OF THE PERMITS.
- CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFICATION OF THE FEDERAL, STATE AND LOCAL CODES AND ORDINANCES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO OBTAIN ALL PERMITS NECESSARY TO COMPLETE THE PROJECT AND ABIDE BY ALL CONDITIONS AND REQUIREMENTS OF THE PERMITS.
- IT IS THE CONTRACTOR'S SOLE RESPONSIBILITY TO DETERMINE ERECTION PROCEDURE AND SEQUENCE TO ENSURE THE SAFETY OF THE STRUCTURE AND ITS COMPONENT PARTS DURING ERECTION AND/OR FIELD MODIFICATIONS. THIS INCLUDES, BUT IS NOT LIMITED TO, THE ADDITION OF TEMPORARY BRACING, GUYS OR TIE DOWNINGS AFTER THE COMPLETION OF THE PROJECT.
- CONTRACTOR SHALL PROMPTLY REMOVE ANY & ALL DEBRIS FROM SITE AND RESTORE AS BEST AS POSSIBLE TO PRECONSTRUCTION CONDITION.

CONTRACTOR QUALIFICATION NOTES:

- ALL REPAIRS SHALL BE PERFORMED BY A TOWER CONTRACTOR WITH A MINIMUM 5 YEARS EXPERIENCE IN TOWER ERECTION AND ALL STRUCTURAL STANDARDS FOR STEEL ANTENNA TOWERS AND ANTENNA SUPPORTING STRUCTURES.
- CONTRACTOR IS RESPONSIBLE FOR ALL CONSTRUCTION MEANS AND METHODS. SHOULD THE CONTRACTOR REQUIRE DIRECT SUPERVISION OF THE WORK, CONTRACTOR SHALL BE RESPONSIBLE FOR SERVICES BASED UPON AN AGREED FEE FOR THE WORK REQUIRED.
- ALL SUBMITTAL INFORMATION MUST BE SENT TO FDH ENGINEERING, INC. 6521 MERIDIAN DRIVE, WALEICH NC, 27616, TEL. (919) 452-7444 FAX (919) 452-7445. CONTRACTOR SHALL OBTAIN THE CONSENT FROM FDH ENGINEERING, INC. WILL VOID ANY RESPONSIBILITY OR LIABILITY FOR DAMAGE (MATERIAL OR PHYSICAL) TOWARDS FDH ENGINEERING, INC.
- ALL CONSTRUCTION TO BE IN ACCORDANCE WITH THE TD-1019-A STANDARD.

JOB SITE SAFETY & NOTES:

- NEITHER THE PROFESSIONAL ACTIVITIES OF FDH ENGINEERING, INC. NOR THE PRESENCE OF FDH ENGINEERING, INC. OR EMPLOYEES AND SUB-CONSULTANTS AT THE CONSTRUCTION SITE, SHALL RELIEVE THE GENERAL CONTRACTOR AND OR SUBCONTRACTORS AND OTHER ENTITY OF THEIR OBLIGATIONS, DUTIES AND RESPONSIBILITIES TO THE CLIENT. CONTRACTOR SHALL BE RESPONSIBLE FOR PERFORMING, SUPERINTENDING OR COORDINATING ALL PORTIONS OF THE WORK OF CONSTRUCTION IN ACCORDANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATORY AGENCIES. THE GENERAL CONTRACTOR AND OR SUBCONTRACTOR IS SOLELY RESPONSIBLE FOR JOB SAFETY, AND WARRANTS THAT THIS INTENT IS EVIDENT BY ACCEPTING THIS WORK.



W.D.
B.T.C.
B.R.N.
14235S1402

| DATE | DESCRIPTION | REV |
|----------|--------------|-----|
| 04/11/14 | CONSTRUCTION | 0 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

THE INFORMATION CONTAINED IN THIS SET OF DOCUMENTS IS PROPRIETARY BY NATURE. REPRODUCTION OR CAUSING TO BE REPRODUCED IN WHOLE OR IN PART WITHOUT THE WRITTEN PERMISSION OF FDH ENGINEERING, INC. IS PROHIBITED.

SITE NAME:
SHELTON-NORTH

SITE NUMBER:
CT46133-A-00

SITE ADDRESS:
162 BIRDSEYE RD.
SHELTON, CT 06484

SHEET TITLE
MODIFICATION SCHEDULE


SHEET NUMBER
S-1

TOWER MODIFICATION SCHEDULE

| NO. | BOTTOM ELEV. (FT) | TOP ELEV. (FT) |
|-----|-------------------|----------------|
| 1 | 77.5± | 87.5± |
| 2 | 0.5± | 20.5± |
| 3 | 0.0± | 5.0± |

TOWER FINISH: GALVANIZED


- APPURTENANCES MAY INTERFERE WITH PROPOSED MODIFICATIONS.
- ALL MODIFICATIONS TO BE INSTALLED CONTINUOUSLY THROUGH EXISTING EQUIPMENT. ALL EXISTING EQUIPMENT NOT TO BE DAMAGED OR TAKEN OFF AIR DURING INSTALLATION.
- ANTENNA GRAPHICS NOT SHOWN FOR CLARITY. SEE STRUCTURAL ANALYSIS REPORT FOR EXISTING ANTENNA LOADING.

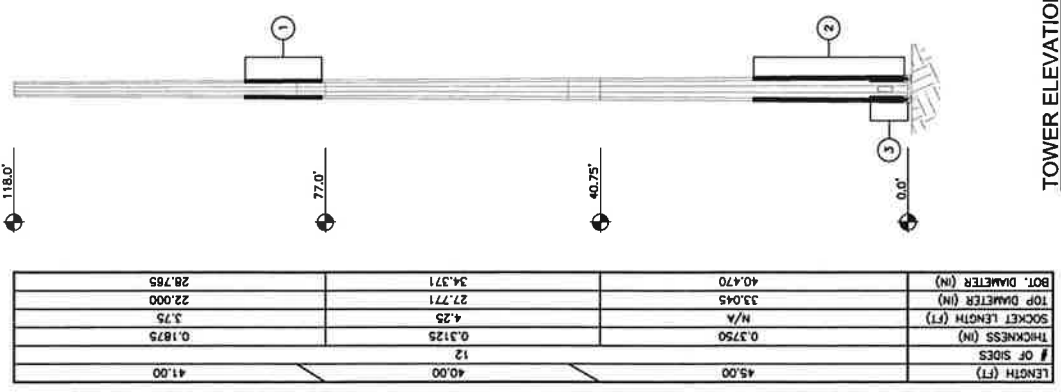

TOWER ELEVATION
SCALE: NTS

PREPARED BY:
FDH
 ENGINEERING INNOVATION

DESIGNED FOR:
SBA
 100 WINDY HILLS DRIVE
 SUITE 100
 WESTPORT, CT 06880
 (860) 487-5125



DATE: 04/11/14
 DRAWN BY: WJD
 CHECKED BY: BTC
 ENG. APP'D: BRN
 PROJECT NO: 143351402

| DATE | DESCRIPTION | NO. |
|----------|--------------|-----|
| 04/11/14 | CONSTRUCTION | 0 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |


THE INFORMATION CONTAINED IN THIS SET OF DOCUMENTS IS PROPRIETARY TO FDH ENGINEERING, INC. ANY REPRODUCTION OR CAUSING OF THIS INFORMATION TO BE A PART OF THESE DRAWINGS WITHOUT THE PERMISSION OF FDH ENGINEERING, INC. IS PROHIBITED.

SITE NAME:
 SHELTON-NORTH
 SITE NUMBER:
 CT48193-A-00
 SITE ADDRESS:
 162 BIRDSEYE RD.
 SHELTON, CT 06884


SHEET TITLE
 FLAT PLATE INSTALLATION
 DETAILS 1

SHEET NUMBER
S-2


| FLAT PLATE INSTALLATION SCHEDULE | | | | |
|----------------------------------|------|--------------------------|----------------------|------------|
| PART # | QTY. | DESCRIPTION | ELEVATION | FLATS |
| MK-1 | 3 | FLAT PLATE REINFORCEMENT | 77'-6" ± TO 87'-6" ± | 3 - 7 - 11 |
| MK-2 | 3 | FLAT PLATE REINFORCEMENT | 0'-6" ± TO 20'-6" ± | 3 - 7 - 11 |
| - | 180 | 20MM AJAX BOLTS | VARIABLES | - |

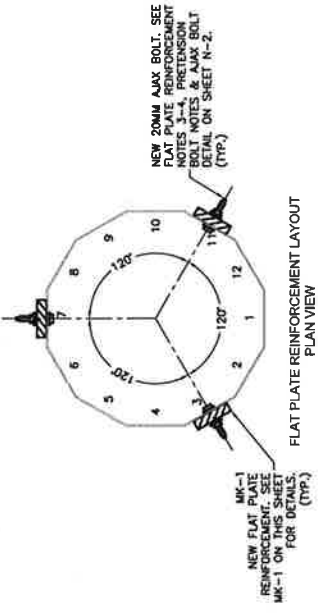


SECTION 2
 SCALE: 3/4" = 1'-0"

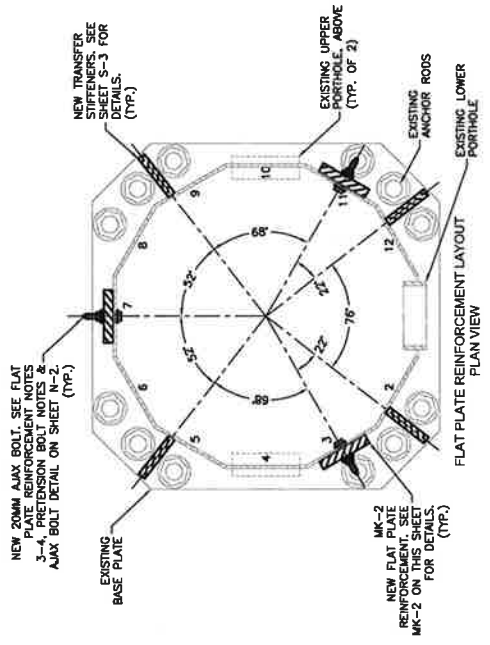

SECTION 3
 SCALE: 3/4" = 1'-0"

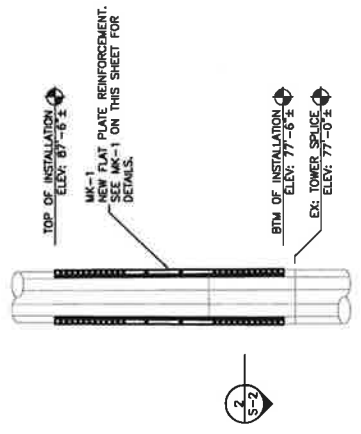

SECTION 2

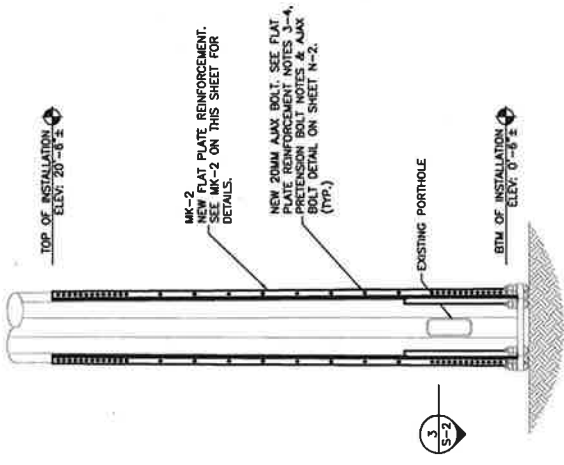

SECTION 3

SECTION 1
 SCALE: 3/16" = 1'-0"

FLAT PLATE REINFORCEMENT LAYOUT
 ELEVATION VIEW

PREPARED BY:
FDH
 ENGINEERING INNOVATION

1875 LANTANA DRIVE
 RALEIGH, NC 27618
 PHONE: 919-850-1032
 FAX: 919-850-1031

PREPARED FOR:
SBA
 2000 BUCKLEY ROAD, SUITE 200
 BOCA RATON, FL 33487
 (954) 487-5176



PROJECT NO.: 1423051400
 DRAWN BY: WJD
 CHECKED BY: BTC
 ENG. APPROV.: BRN
 PROJECT LOC.: NO. 28630


| SUBMITTALS | |
|------------|--------------|
| DATE | DESCRIPTION |
| 07/17/14 | CONSTRUCTION |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

THE INFORMATION CONTAINED IN THIS SET OF DOCUMENTS IS PROPRIETARY BY FDH ENGINEERING, INC. ANY REPRODUCTION OR CAUSING TO BE REPRODUCED IN ANY MANNER WITHOUT THE PERMISSION OF FDH ENGINEERING, INC. IS PROHIBITED.


SITE NAME:
 SHELTON-NORTH
 SITE NUMBER:
 CT46133-A-00
 SITE ADDRESS:
 162 BIRDSEYE RD.
 SHELTON, CT 06484

SHEET TITLE
 FLAT PLATE INSTALLATION
 DETAILS II

SHEET NUMBER
S-3

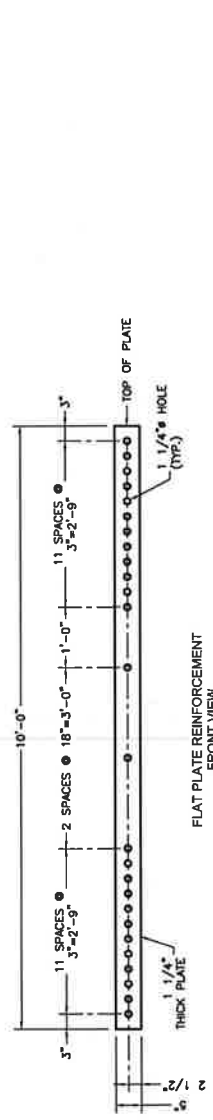

FLAT PLATE REINFORCEMENT
 FRONT VIEW
 MK-1
 S-3
 SCALE: 1/2" = 1'-0"

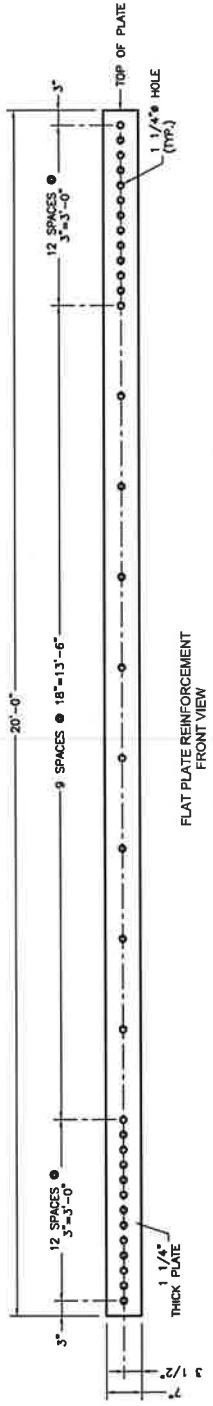

FLAT PLATE REINFORCEMENT
 FRONT VIEW
 MK-2
 S-3
 SCALE: 1/2" = 1'-0"

THE INFORMATION CONTAINED IN THIS SET OF DOCUMENTS IS PROPRIETARY BY FDH ENGINEERING, INC. ANY REPRODUCTION OR CAUSING TO BE REPRODUCED IN ANY MANNER WITHOUT THE PERMISSION OF FDH ENGINEERING, INC. IS PROHIBITED.

| SUBMITTALS | |
|--------------------------------|--------------|
| DATE | REVISION |
| 04/11/14 <td>CONSTRUCTION</td> | CONSTRUCTION |
| | 0 |


THE INFORMATION CONTAINED IN THIS SET OF DOCUMENTS IS PROPRIETARY BY NATURE. REPRODUCTION OR CAUSING TO BE REPRODUCED THE WHOLE OR ANY PART THEREOF WITHOUT THE WRITTEN PERMISSION OF FDH ENGINEERING, INC. IS PROHIBITED.

SITE NAME:
SHELTON-NORTH
 SITE NUMBER:
CT46133-A-00
 SITE ADDRESS:
 162 BIRDSEYE RD.
 SHELTON, CT 06484


SHEET TITLE:
TRANSFER STIFFENER INSTALLATION DETAILS

SHEET NUMBER:
S-4


| TRANSFER STIFFENER INSTALLATION SCHEDULE | | | |
|--|----------|--------------------|------------------|
| PART. NO | QUANTITY | DESCRIPTION | ELEVATION |
| MK-3 | 4 | TRANSFER STIFFENER | 0'-0"± TO 5'-0"± |

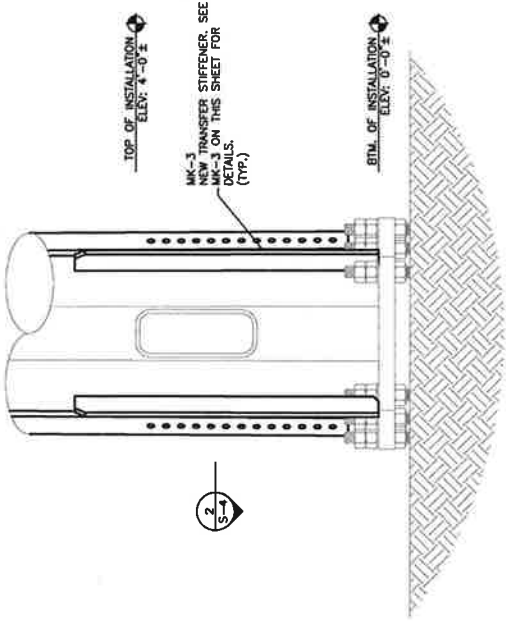

TRANSFER STIFFENER LAYOUT
 ELEVATION VIEW
 1
 S-4
 SCALE: 1/2" = 1'-0"

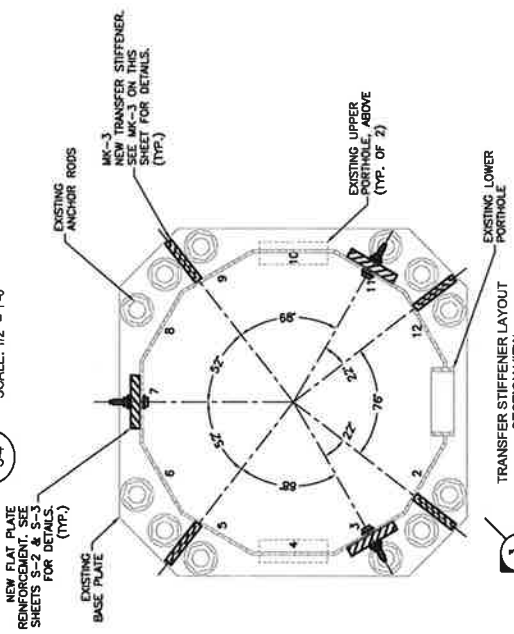

TRANSFER STIFFENER LAYOUT
 SECTION VIEW
 2
 S-4
 SCALE: 3/4" = 1'-0"

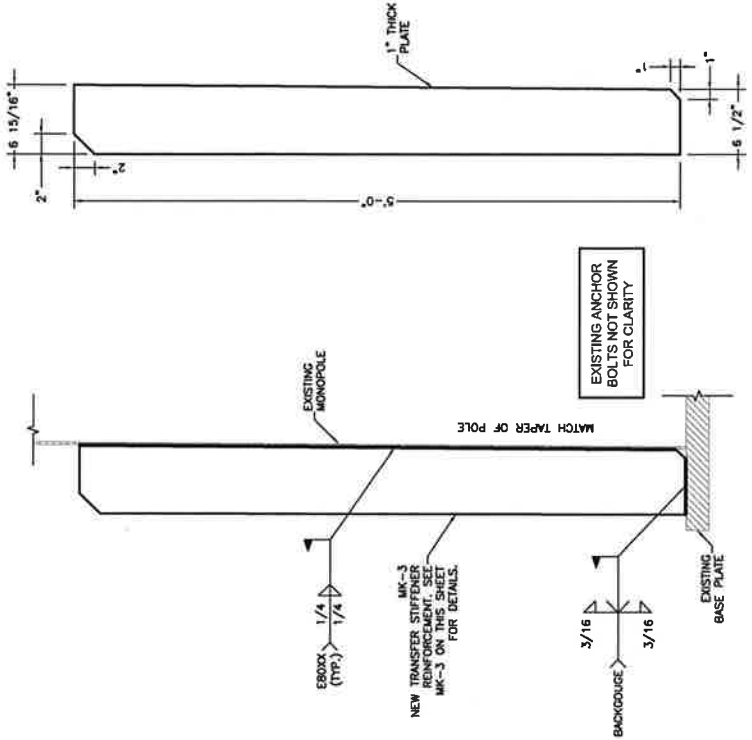

TRANSFER STIFFENER
 FRONT VIEW
 MK-3
 S-4
 SCALE: 1" = 1'-0"

TRANSFER STIFFENER WELD DETAIL
 FRONT VIEW
 3
 S-4
 NTS