

6087

State of Connecticut
REGULATION
of

NAME OF AGENCY

Department of Energy and Environmental Protection

Concerning

SUBJECT MATTER OF REGULATION

**Amendment of Section 22a-174-20 of the
Regulations of Connecticut State Agencies
Control of Organic Compound Emissions**

Section 1. Subsection (s) of section 22a-174-20 of the Regulations of Connecticut State Agencies is amended to read as follows:

(s) Miscellaneous metal and plastic parts [and products.] coatings.

[(1) For the purpose of this subsection:

"Air dried coating" means a coating that is dried by the use of air or forced warm air at temperatures up to below 90 degrees C (194 degrees F).

"Clear coat" means a base or top coating which either lacks color and opacity or which is transparent and uses the surface to which it is applied as a reflectant base or undertone color.

"Coating application system" means all operations and equipment that apply, convey and dry a surface coating, including, but not limited to, spray booths, flow coaters, flashoff areas, air dryers and ovens.

"Exposure to extreme environmental conditions" means exposure to: the weather all of the time; temperatures consistently above 95 degrees C; detergents; abrasive and scouring agents; solvents; corrosive atmospheres; or similar environmental conditions as determined by the commissioner and the Administrator.

"Extreme performance coatings" means coatings designed for exposure to extreme environmental conditions.

"Heat sensitive material" means materials that cannot consistently be exposed to temperature greater than 95 degrees C (203 degrees F) for more than 30 seconds.

"High performance architectural aluminum coating" means a coating that is applied to architectural aluminum panels, extrusions or subsections to meet the specifications of publication number AAMA 605.2-1992 of the Architectural Aluminum Manufacturer's Association.

"Prime coat" means the first of two or more films of coating applied to a metal surface.

"Single coat" means one film of coating applied to a metal surface.

"Topcoat" means the final film or series of films of coating applied in a two-coat (or more) operation.

"Transfer efficiency" means the portion of coating solids that adheres to the metal surface during the application process, expressed as a percentage of the total volume of coating solids delivered by the applicator.

6087

(2) Applicability. For the purpose of this subsection:

(A) Miscellaneous metal parts and products includes the following industrial categories:

- (i) Large farm machinery such as harvesting, fertilizing and planting machines, tractors, combines, etc.,
- (ii) Small farm machinery such as lawn and garden tractors, lawn mowers, rototiller, etc.,
- (iii) Small appliances such as fans, mixers, blenders, crock pots, dehumidifiers, vacuum cleaners, etc.,
- (iv) Commercial machinery such as office equipment, computers and auxiliary equipment, typewriters, calculators, vending machines, etc.,
- (v) Industrial machinery such as pumps, compressors, conveyor components, fans, blowers, transformers, etc.,
- (vi) Fabricated metal products such as metal covered doors, frames, etc., and
- (vii) Any other industrial category which coats metal parts or products under the Standard Industrial Classification Code of Major Group 33 (primary metal industries), Major Group 34 (fabricated metal products), Major Group 35 (nonelectric machinery), Major Group 36 (electrical machinery), Major Group 37 (transportation equipment), Major Group 38 (miscellaneous instruments), Major Group 39 (miscellaneous manufacturing industries), Major Group 40 (Railroad Transportation) and Major Group 41 (Transit Passenger Transportation); and

(B) Miscellaneous metal parts and products excludes the following items:

- (i) automobiles and light duty trucks,
- (ii) metal cans,
- (iii) flat metal sheets and strips in the form of rolls or coils,
- (iv) plastic and glass objects,
- (v) magnet wire for use in electrical machinery,
- (vi) metal furniture,
- (vii) the exterior surface of assembled aircraft,
- (viii) automobile refinishing,
- (ix) customized top coating of automobiles and trucks, if production is less than 5 vehicles per day, and
- (x) the exterior surface of assembled marine vessels.

6 087

- (3) Emission standards. No owner or operator of a facility engaged in the surface coating of miscellaneous metal parts and products may operate a coating application system subject to this subsection that emits volatile organic compounds from any coating in excess of:
- (A) 0.52 kg/l (4.3 lb/gal) of coating, excluding water and exempt volatile organic compounds listed in 40 CFR 51.100(s) as amended from time to time, delivered to a coating applicator that applies a clear coat;
 - (B) 0.42 kg/l (3.5 lb/gal) of coating, excluding water and exempt volatile organic compounds listed in 40 CFR 51.100(s) as amended from time to time, delivered to a coating applicator in a coating application system that is air dried or forced warm air dried at temperatures up to 90 degrees C (194 degrees F);
 - (C) 0.42 kg/l (3.5 lb/gal) of coating, excluding water and exempt volatile organic compounds listed in 40 CFR 51.100(s) as amended from time to time, delivered to a coating applicator that applies extreme performance coatings;
 - (D) 0.36 kg/l (3.0 lb/gal) of coating, excluding water and exempt volatile organic compounds listed in 40 CFR 51.100(s) as amended from time to time, delivered to a coating applicator for all other coatings, adhesives, fillers or sealants and coating application systems; and
 - (E) 0.75 kg/l (6.3 lb/gal) of coating, excluding water and exempt volatile organic compounds listed in 40 CFR 51.100(s) as amended from time to time, delivered to a coating applicator which applies high performance architectural aluminum coatings, provided that:
 - (i) such applicator is located at a premises which emits three thousand three hundred thirty three (3,333) pounds of volatile organic compounds per month or less from such applicator, and
 - (ii) such applicator was an existing source in Connecticut on or before November 1, 1994.
- (4) This subsection applies to all application areas, flashoff areas, air and forced air dryers and ovens used in the surface coating operations pertaining to miscellaneous metal parts and products listed in subsection (s)(2) of this section. This regulation also applies to prime coat, top coat and single coat operations.
- (5) If more than one emission limitation in subsection (s)(3) of this section applies to a specific coating, then the least stringent emission limitation shall be applied.
- (6) All volatile organic compound emissions from solvent washings shall be considered in the emission limitations in subsection (s)(3) of this section unless the solvent is directed into containers that prevent evaporation into the atmosphere.
- (7) The provisions of this subsection apply to any premises that has actual emissions of volatile organic compounds of fifteen (15) pounds per day or more in any one day from all miscellaneous metal parts and products surface coating operations on such premises unless:
- (A) The total potential emissions from all surface coating operations are limited by permit or order of the commissioner to 1,666 pounds or less in any calendar month;

6087

- (B) The owner or operator is and has at all times been in compliance with such limitation since the issuance of the permit or order;
- (C) The total actual emissions from all such surface coating operations have not exceeded 1,666 pounds in any calendar month since January 1987; and
- (D) Notwithstanding subsections (A) through (C) of this subdivision, any surface coating operation on such premises that emitted 40 pounds or more in any day and that was subject to the requirements of this subsection prior to November 1, 1989, shall remain subject to the provisions of this subsection.

(8) After November 1, 1989 any premises that is or becomes subject to the provisions of this subsection shall remain subject to the provisions of this subsection unless the owner or operator meets the requirements of subparagraphs (A), (B) and (C) of subdivision (7) of this subsection.

(9) The owner or operator of any surface coating operation that was not subject to the requirements of this subsection prior to November 1, 1989, shall have until October 1, 1990, to comply with the requirements of this subsection for such system.

(10) Notwithstanding the requirements of this subsection, an owner or operator may use, in the aggregate, up to fifty-five (55) gallons of coatings that exceed the emission limitations set forth in subdivision (3)(A) through (3)(E), inclusive, of this subsection at such premises for any twelve (12) consecutive months, provided such owner or operator maintains records of such coatings in accordance with subsection (aa) of this section.]

(1) Definitions. For the purpose of this subsection, the following definitions apply:

“Ablative coating” means a coating that chars when exposed to open flame or extreme temperatures, as would occur during the failure of an engine casing or during aerodynamic heating, to protect adjacent components from the heat or open flame;

“Adhesion promoter” means a very thin coating applied to a substrate to promote wetting and form a chemical bond with the subsequently applied material;

“Adhesive bonding primer” means a primer applied in a thin film to aerospace components to inhibit corrosion and increase adhesive bond strength;

“Aerospace high temperature coating” means a coating designed to withstand temperatures of more than 350°F;

“Aerospace vehicle or component” means any fabricated part, processed part, assembly of parts, or completed unit, with the exception of electronic components, of any aircraft including but not limited to airplanes, helicopters, missiles, rockets and space vehicles;

“Air dried” means cured at a temperature below 90°C (194 °F);

“Airless spray application” means a coating spray application system using high fluid pressure, without compressed air, to atomize the coating;

“Air-assisted airless spray application” means a coating spray application system using fluid pressure to atomize the coating and lower pressure air to adjust the shape of the spray pattern;

“Antichafe coating” means a coating applied to areas of moving aerospace components that may rub during normal operations or installation;

6087

“Antique aerospace vehicle” means an aircraft or component thereof that was built at least 30 years ago and that is not routinely in commercial or military service in the capacity for which it was designed;

“Appurtenance” means any accessory to a stationary structure, including but not limited to: bathroom and kitchen fixtures; cabinets; concrete forms; doors; elevators; fences; hand railings; heating equipment, air conditioning equipment, and other fixed mechanical equipment or stationary tools; lampposts; partitions; pipes and piping systems; rain gutters and downspouts; stairways; fixed ladders; catwalks; fire escapes and window screens;

“As applied” means the composition of coating at the time it is applied to a surface, including any solvent, catalyst or other substance added to the coating but excluding water and exempt compounds;

“Automotive-transportation part” means an interior or exterior component of a motor vehicle or mobile source;

“Baked” means cured at a temperature at or above 90°C (194°F);

“Base coat” means the initial coating applied to a substrate in a process of applying two or more coatings;

“Bearing coating” means a coating applied to an antifriction bearing, a bearing housing or the area adjacent to such a bearing to facilitate bearing function or to protect base material from excessive wear. “Bearing coating” does not include a material that can also be classified as a dry lubricative material or a solid film lubricant;

“Bonding maskant ” means a temporary coating used to protect selected areas of aerospace parts from strong acid or alkaline solutions during processing for bonding;

“Business machine” means a device that uses electronic or mechanical methods to process information, perform calculations, print or copy information or convert sound into electrical impulses for transmission, such as, typewriters, electronic computing devices, calculating and accounting machines, telephone and telegraph equipment and photocopy machines;

“Camouflage coating” means a coating used, principally by the military, to conceal equipment from detection;

“Capture efficiency” means the ratio of VOC emissions delivered to the control device to the total VOC emissions resulting from the miscellaneous metal and plastic parts coating operation, expressed as a percentage;

“Caulking and smoothing compound” means a semi-solid material that is applied by hand and used to smooth exterior vehicle surfaces or fill cavities such as bolt hole accesses. “Caulking and smoothing compound” does not include a material that can also be classified as a sealant;

“Chemical agent-resistant coating” means an exterior topcoat designed to withstand exposure to chemical warfare agents or the decontaminants used on these agents;

“Chemical milling maskant” means a coating that is applied directly to aluminum components to protect surface areas when chemically milling the component with a Type I or II etchant. “Chemical milling maskants” do not include bonding maskants, critical use and line sealer maskants, seal coat maskants, maskants that are defined as specialty coatings or maskants used with either a Type I or II etchant plus a bonding maskant, critical use and line sealer maskant or seal coat maskant;

6087

“Cleaning solvent” means any VOC-containing liquid, including a liquid impregnated wipe or towelette, used in cleaning;

“Clear coating” means a colorless coating that contains binders but no pigment and that is formulated to form a transparent film;

“Coating” means a material that is deposited in a thin, persistent, uniform layer across the surface of a substrate for aesthetic, protective or functional purposes, including but not limited to, paints, primers, inks and maskants. “Coating” does not include protective oils, acids and bases;

“Coating unit” means a series of one or more coating applicators and any associated drying area or oven wherein a coating is applied, dried or cured. A “coating unit” ends at the point where the coating is dried or cured, or prior to any subsequent application of a different coating;

“Commercial exterior aerodynamic structure primer” means a primer used on aerodynamic components and structures that protrude from the fuselage, such as wings and attached components, control surfaces, horizontal stabilizers, vertical fins, wing-to-body fairings, antennae and landing gear and doors for the purpose of extended corrosion protection and enhanced adhesion;

“Commercial interior adhesive” means a material used in the bonding of passenger cabin interior components;

“Compatible substrate primer” means one of the following coatings:

- (A) A primer that is compatible with the filled elastomeric coating and is epoxy based,
- (B) A primer that inhibits corrosion and is applied to bare metal surfaces or is applied prior to adhesive application, or
- (C) A primer that is applied to surfaces, excluding fuel tanks, that can be expected to come into contact with fuel;

“Control device efficiency” means the ratio of VOC emissions recovered or destroyed by the control device to the total VOC emissions that are introduced into the device, expressed as a percentage;

“Corrosion prevention compound” means a coating system that provides corrosion protection by displacing water and penetrating substrates, forming a protective barrier between the metal surface and moisture. “Corrosion prevention compound” does not include a coating containing oils or waxes;

“Critical use and line sealer maskant” means a temporary coating, not covered under other maskant categories, used to protect selected areas of aerospace parts from strong acid or alkaline solutions such as those used in anodizing, plating, chemical milling and processing of magnesium, titanium or high A8 strength steel, high-precision aluminum chemical milling of deep cuts and aluminum chemical milling of complex shapes, and includes materials used for repairs or to bridge gaps left by scribing operations;

“Cryogenic flexible primer” means a primer designed to provide corrosion resistance, flexibility and adhesion of subsequent coating systems when exposed to loads up to and surpassing the yield point of the substrate at cryogenic temperatures (-275°F and below);

“Cryoprotective coating” means a coating that insulates cryogenic or subcooled surfaces to limit propellant boil-off, maintain structural integrity of metallic structures during ascent or re-entry and prevent ice formation;

6087

“Cyanoacrylate adhesive” means a fast-setting, single component adhesive that cures at room temperature and contains methyl, ethyl, methoxymethyl or other functional groupings of cyanoacrylate;

“Dip coating” means a method of applying a coating to a surface by submersion into and removal from a coating bath;

“Drum” means any cylindrical metal container larger than 12 gallons capacity and less than or equal to 110 gallons capacity;

“Dry lubricative material” means a coating consisting of lauric acid, cetyl alcohol, waxes or other non-cross linked or resin-bound materials that act as a dry lubricant;

“Electric dissipating coating” means a coating that rapidly dissipates a high-voltage electric charge;

“Electric-insulating and thermal-conducting coating” means a coating that displays an electrical insulation of at least 1000 volts DC per mil on a flat test plate and an average thermal conductivity of at least 0.27 BTU per hour-foot-degree-Fahrenheit;

“Electric-insulating varnish” means a coating applied to electric motors, components of electric motors or power transformers to provide electrical, mechanical and environmental protection or resistance;

“Electric or radiation-effect coating” means a coating or coating system engineered to interact, through absorption or reflection, with specific regions of the electromagnetic energy spectrum, such as the ultraviolet, visible, infrared or microwave regions and which may be used for lightning strike protection, electromagnetic pulse (EMP) protection and radar avoidance.

“Electrostatic application” means a method of applying coating particles or coating droplets to a grounded surface by electrically charging such particles or droplets;

“Electrostatic discharge and electromagnetic interference coating” or “EMI coating” means a coating applied to space vehicles, missiles, aircraft radomes and helicopter blades to disperse static energy or reduce electromagnetic interference;

“Electrostatic preparation coating” means a coating applied to a plastic part solely to provide conductivity for the subsequent application of a primer, a topcoat or other coating through the use of electrostatic application methods;

“Elevated-temperature Skydrol-resistant commercial primer” means a primer applied primarily to commercial aircraft or commercial aircraft adapted for military use that withstands immersion in phosphate-ester hydraulic fluid (Skydrol 500b or equivalent) at the elevated temperature of 150°F for 1,000 hours;

“EMI/RFI shield coating” means a coating that functions to attenuate electromagnetic interference, radio frequency interference signals or static discharge;

“Epoxy polyamide topcoat” means a coating containing epoxy and a polyamide component used to provide a hard, durable, chemical-resistant finish;

“Etching filler” means a coating that contains less than 23% solids by weight and at least 0.5% acid by weight and is used as a substitute for the application of a pretreatment coating followed by a primer;

“Exempt compound” means a carbon compound excluded from the definition of “volatile organic compound,” as defined in section 22a-174-1 of the Regulations of Connecticut State Agencies;

6087

“Extreme high-gloss coating” means a coating that, when tested by American Society for Testing Material Test Method D523-08, Standard Test Method for Specular Gloss, shows a reflectance of 75 or more on a 60 degree meter;

“Extreme performance coating” means a coating used on a metal surface where the coated surface is, in its intended use, subject to one of the following conditions:

- (A) Chronic exposure to corrosive, caustic or acidic agents, chemicals, chemical fumes, chemical mixtures or solution,
- (B) Repeated exposure to temperatures in excess of 250°F, or
- (C) Repeated heavy abrasion, including mechanical wear and repeated scrubbing with industrial grade solvents, cleaners or scouring agents;

“Fire-resistant interior coating” means, for civilian aircraft, fire-resistant interior coatings used on passenger cabin interior parts that are subject to Federal Aviation Administration fireworthiness requirements. For military aircraft, fire-resistant interior coatings are used on parts that are subject to the flammability requirements of MIL-STD-1630A and MIL-A-87721. For space applications, “fire-resistant interior coating” means a coating subject to the flammability requirements of SE-R-0006 and SSP 30233;

“Flexible primer” means a primer with elastomeric qualities that provides a compatible, flexible substrate over bonded sheet rubber and rubber-type coatings;

“Flight test coating” means a coating applied to aircraft other than missiles or single-use aircraft prior to flight testing to protect the aircraft from corrosion and to provide required marking during flight test evaluation;

“Flow coating” means a non-atomized technique of applying coating to a substrate using a fluid nozzle in a fan pattern with no air supplied to the nozzle;

“Fog coat” means a coating that is applied to a plastic part at a thickness of no more than 0.5 mils of coating solids for the purpose of color matching without masking a molded-in texture;

“Fuel tank adhesive” means an adhesive that must be compatible with fuel tank coatings and is used to bond components exposed to fuel;

“Fuel tank coating” means a coating applied to fuel tank components for the purpose of corrosion or bacterial growth inhibition and to assure sealant adhesion in extreme environmental conditions;

“General” means a coating category for a coating that does not meet any other category definition provided in this subsection for the specified substrate (i.e., metal part or plastic part);

“General aviation rework facility” means any aerospace facility with the majority of its revenues resulting from the reconstruction, repair, maintenance, repainting, conversion or alteration of general aviation aerospace vehicles or components;

“Gloss reducer” means a coating that is applied to a plastic part at a thickness of no more than 0.5 mils of coating solids solely to reduce the shine of the part;

“Heat-resistant coating” means a coating able to withstand a temperature of at least 400° F during normal use;

6087

“High-performance architectural coating” means a coating used to protect architectural subsections and which meets the requirements of the Architectural Aluminum Manufacturer Association's publication number AAMA 2604-05 (Voluntary Specification, Performance Requirements and Test Procedures for High Performance Organic Coatings on Aluminum Extrusions and Panels) or 2605-05 (Voluntary Specification, Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels);

“High temperature coating” means a coating certified to withstand a temperature of 1000°F for 24 hours;

“HVLV spray application” means to apply a coating using a coating application system that uses lower air pressure and higher volume than conventional air atomized spray systems, where the manufacturer has represented that the system is HVLV by affixing a permanent label or through representations on the packaging or other product literature;

“Insulation covering” means material that is applied to foam insulation to protect the insulation from mechanical or environmental damage;

“Intermediate release coating” means a thin coating applied beneath topcoats to assist in removing the topcoat in depainting operations and to allow the use of less hazardous depainting methods;

“Lacquer” means a clear or pigmented coating formulated with a nitrocellulose or synthetic resin to dry by evaporation without a chemical reaction and that is resoluble in its original solvent;

“Large commercial aircraft” means an aircraft of more than 110,000 pounds, maximum certified take-off weight, manufactured for non-military use;

“Mask coating” means thin film coating applied through a template to coat a small portion of a substrate;

“Medical device” means an instrument, apparatus, implement, machine, gadget, appliance, implant, *in vitro* reagent or other similar or related article, including any component, part or accessory, which meets one of the following conditions:

- (A) Recognized in the official National Formulary or the United States Pharmacopeia or any supplement thereto,
- (B) Intended for use in the diagnosis of disease or other conditions or in the cure, mitigation, treatment or prevention of disease in persons or animals, or
- (C) Intended to affect the structure or function of the body of a person or animal and which does not achieve its primary intended purposes through chemical action within or on such body and which is not dependent upon being metabolized for the achievement of its primary intended purposes;

“Metalized epoxy coating” means a coating that contains metallic pigmentation for appearance or added protection;

“Metallic coating” means a coating that contains more than five grams of metal particles per liter of coating, as applied;

“Miscellaneous metal and plastic parts” means metal and plastic components of products as well as the products themselves constructed either entirely or partially from metal or plastic including, but not limited to: aerospace vehicles and components, fabricated metal products, molded plastic parts, small and large farm machinery, commercial and industrial machinery and equipment, automotive or transportation equipment, interior or exterior automotive parts, construction equipment, motor vehicle accessories,

6087

bicycles and sporting goods, toys, recreational vehicles, extruded aluminum structural components, railroad cars, lawn and garden equipment, business machines, laboratory and medical equipment, electronic equipment, steel drums, metal pipes and small appliances;

“Mold-seal coating” means the initial coating applied to a new mold or a repaired mold to provide a smooth surface that, when coated with a mold release coating, prevents products from sticking to the mold;

“Mold release” means a coating applied to a mold surface to prevent the molded piece from sticking to the mold as it is removed;

“Motor vehicle” means any self-propelled vehicle, including, but not limited to, cars, trucks, buses, golf carts, vans, motorcycles, tanks and armored personnel carriers;

“Motor vehicle bedliner coating” means a multi-component coating applied to a cargo bed after the application of a topcoat to provide additional durability and chip resistance;

“Motor vehicle cavity wax” means a coating applied into the cavities of the vehicle primarily for the purpose of enhancing corrosion protection;

“Motor vehicle deadener” means a coating applied to selected vehicle surfaces primarily for the purpose of reducing the sound of road noise in the passenger compartment;

“Motor vehicle gasket/sealing material” means a fluid applied to coat a gasket or replace and perform the same function as a gasket. Automobile and light-duty truck gasket/gasket sealing material includes room temperature vulcanization (RTV) seal material;

“Motor vehicle lubricating wax/compound” means a protective lubricating material applied to vehicle hubs and hinges;

“Motor vehicle sealer” means a high viscosity material generally, but not always, applied in the paint shop after the body has received an electrodeposition primer coating and before the application of subsequent coatings (e.g., primer-surfacer). The primary purpose of automobile and light-duty truck sealer is to fill body joints completely so that there is no intrusion of water, gases or corrosive materials into the passenger area of the body compartment. Such materials are also referred to as sealant, sealant primer, or caulk;

“Motor vehicle trunk interior coating” means a coating applied to the trunk interior to provide chip protection;

“Motor vehicle underbody coating” means a coating applied to the undercarriage or firewall to prevent corrosion or provide chip protection;

“Multi-colored coating” means a coating packaged in a single container and applied in a single coat which exhibits more than one color when applied;

“Multi-component coating” means a coating requiring the addition of a separate reactive resin, such as a catalyst or hardener, before application to form an acceptable dry film;

“Nonstructural adhesive” means an adhesive that bonds nonload bearing aerospace components in noncritical applications and is not covered in any other specialty adhesive categories;

“One-component coating” means a coating that is ready for application as packaged for sale, except for the addition of a thinner to reduce the viscosity;

6087

“Optical antireflection coating” means a coating with a low reflectance in the infrared and visible wavelength ranges that is used for antireflection on or near optical and laser hardware;

“Optical coating” means a coating with a low reflectance in the infrared and visible wavelength range that is used on or near optical or laser lenses or hardware;

“Overall control efficiency” means the product of the capture efficiency and the control device efficiency;

“Pan-backing coating” means a coating applied to the surface of pots, pans or other cooking implements that are exposed directly to a flame or other heating element;

“Part marking coating” means coatings or inks used to make permanent or temporary identifying markings on materials, components or assemblies;

“Plastic part” means any piece or combination of pieces of which at least one has been formed from one or more resins. Such pieces may be solid, porous, flexible or rigid. “Plastic part” does not include a part made of fiberglass or composite material;

“Powder coating” means any coating applied as a dry, finely divided solid that, when melted and fused, adheres to the substrate as a paint film;

“Prefabricated architectural component coating” means a coating applied to prefabricated metal parts and products that are to be used as architectural appurtenances or structures and that are detached from the structure when coated in a shop environment;

“Pretreatment coating” means a coating, containing at least 0.5 percent acid by weight, applied directly to a metal or composite surface to provide surface etching, corrosion resistance, adhesion and ease of stripping;

“Primer” means a coating applied to prevent corrosion, provide protection or provide a surface for adhesion of subsequent coatings;

“Radome” means the nonmetallic protective housing for electromagnetic transmitters and receivers such as radar or electronic countermeasures;

“Rain erosion-resistant coating” means a coating or coating system used to protect the leading edges of parts, such as flaps, stabilizers, radomes or engine inlet nacelles against erosion caused by rain impact during flight;

“Related cleaning” means the removal of uncured coatings, coating residue and contaminants from:

- (A) Miscellaneous metal and plastic parts prior to the application of coatings,
- (B) Miscellaneous metal and plastic parts between coating applications, or
- (C) Transfer lines, storage tanks, spray booths and coating application equipment;

“Repair coating” means a coating used to recoat portions of a product that has sustained mechanical damage to the coating following normal painting operations;

“Resin” means any of numerous physically similar polymerized synthetics or chemically modified natural materials including thermoplastic materials such as polyvinyl, polystyrene and polyethylene and thermosetting materials such as polyesters, epoxies and silicones;

6087

“Resist coating” means a coating that is applied to a plastic part before metallic plating to prevent deposits of metal on portions of the plastic part;

“Rocket motor bonding adhesive” means an adhesive used in rocket motor bonding applications;

“Rocket motor nozzle coating” means a catalyzed epoxy coating system used in elevated temperature applications on rocket motor nozzles;

“Roll coating” means a coating method using a machine that applies coating to a substrate by continuously transferring coating through a set of oppositely rotating rollers;

“Rubber-based adhesive” means a quick-setting contact cement that provides a strong, yet flexible bond between two substrates that may be of dissimilar materials;

“Safety-indicating coating” means a coating that changes in a physical characteristic, such as color, to indicate unsafe conditions;

“Scale inhibitor” means a coating that is applied to the surface of a part prior to thermal processing to inhibit scale formation;

“Screen print ink” means an ink used in screen printing processes during fabrication of decorative laminates and decals;

“Sealant” means a material used to prevent the intrusion of water, fuel, air or other liquids or solids from certain areas of aerospace vehicles or components;

“Seal coat maskant” means an overcoat applied over a maskant to improve abrasion and chemical resistance during production operations;

“Self-priming topcoat” means one or more layers of identical coating formulation of a topcoat that is applied directly to an uncoated aerospace vehicle or component for corrosion prevention, environmental protection or functional fluid resistance;

“Shock-free coating” means a coating applied to electrical components to protect the user from electric shock and that provides for low capacitance and high resistance and resists breaking down under high voltage;

“Silicone insulation material” means an insulating material that is not sacrificial and that is applied to exterior metal surfaces for protection from high temperatures caused by atmospheric friction or engine exhaust;

“Silicone-release coating” means any coating that contains silicone resin and is intended to prevent food from sticking to metal surfaces such as baking pans;

“Solar-absorbent coating” means a coating that has as its primary purpose the absorption of solar radiation;

“Solid-film lubricant” means a very thin coating consisting of a binder system containing as its chief pigment material one or more of molybdenum disulfide, graphite, polytetrafluoroethylene or other solids that act as a dry lubricant between faying surfaces;

“Space vehicle” means a man-made device, either manned or unmanned, designed for operation beyond earth's atmosphere, including, but not limited to, integral equipment such as models, mock-ups,

6087

prototypes, molds, jigs, tooling, hardware jackets and test coupons, including auxiliary equipment associated with test, transport and storage, which through contamination can compromise the space vehicle performance;

“Specialty coating” means a coating that, even though it meets the definition of a primer, topcoat or self-priming topcoat, has additional performance criteria beyond those of primers, topcoats and self-priming topcoats for specific applications. Such performance criteria may include, but are not limited to, temperature or fire resistance, substrate compatibility, antireflection, temporary protection or marking, sealing, adhesion or enhanced corrosion protection;

“Specialized function coating” means a coating that is limited in application, characterized by low volume usage and is not able to be categorized as any other coating in Table 20(s)-6a;

“Stencil coating” means an ink or a coating that is rolled or brushed onto a template or stamp to add identifying letters or numbers to metal parts or products;

“Structural autoclavable adhesive” means an adhesive used to bond load-carrying aerospace components that is cured by heat and pressure in an autoclave;

“Structural nonautoclavable adhesive” means an adhesive cured under ambient conditions that is used to bond load-carrying aerospace components or other critical functions, such as nonstructural bonding in the proximity of engines;

“Temporary protective coating” means a coating applied to provide scratch or corrosion protection during manufacturing, storage or transportation. “Temporary protective coating” does not include any coating that protects against strong acid or alkaline solutions;

“Texture coat” means a coating that is applied to a plastic part which, in its finished form, consists of discrete raised spots of the coating;

“Textured finish” means a rough surface produced by spraying and splattering large drops of coating onto a previously applied coating;

“Thermal control coating” means a coating formulated with specific thermal conductive or radiative properties to permit temperature control of the substrate;

“Topcoat” means the final coating applied in a process of applying two or more coatings;

“Touch-up coating” means a coating used to cover minor coating imperfections appearing after the main coating operation;

“Transfer efficiency” means the portion of coating solids that adheres to the metal or plastic surface during the application process, expressed as a percentage of the total volume of coating solids delivered by the applicator;

“Translucent coating” means a coating which contains binders and pigment and is formulated to form a colored, but not opaque, film;

“Vacuum-metalizing coating” means the undercoat applied to a substrate on which the metal is deposited prior to a vacuum-metalizing process or the overcoat applied directly to the metal film after a vacuum-metalizing process;

“Vacuum metalizing process” means the process of evaporating metals inside a vacuum chamber and depositing them on a substrate to achieve a uniform metalized layer;

6087

“Wet fastener installation coating” means a primer or sealant applied by dipping, brushing or daubing to fasteners that are installed before the coating is cured; and

“Wing coating” means a corrosion-resistant topcoat that withstands the flexing of aircraft wings and rotary wings.

(2) Applicability.

(A) Except as provided in subdivision (7) of this subsection, the provisions of this subsection apply to the owner or operator of any:

(i) Coating unit subject at any time to the provisions of subsection (s) of this section that was in effect prior to the effective date of this regulation, or

(ii) Miscellaneous metal and plastic parts coating unit for which the owner or operator purchases for use at the premises 855 gallons or more of coatings and cleaning solvents in the aggregate per rolling 12-month period.

(B) Any owner or operator of a miscellaneous metal or plastic parts coating unit who does not meet the applicability requirements provided in subparagraph (A) of this subdivision shall maintain either material purchase or actual usage records to verify that this subsection does not apply to such owner or operator.

(C) An owner or operator subject to this subsection shall:

(i) For a miscellaneous metal and plastic parts coating unit that is in operation prior to or on the effective date of this regulation, comply with the requirements of this subsection no later than January 1, 2013, or

(ii) For a miscellaneous metal and plastic parts coating unit that commences operation after January 1, 2013, comply with the requirements of this subsection upon commencing operation.

(D) Any owner or operator subject to this subsection shall remain subject to this subsection.

(3) Except as provided in subdivision (7) of this subsection, on and after January 1, 2013, no owner or operator shall apply any coating, inclusive of any VOC-containing material added to the original coating supplied by the manufacturer, unless the owner or operator controls emissions of VOCs in accordance with subparagraph (A), (B), (C) or (D) of this subdivision. If more than one emission limit or emission rate applies in a particular situation, then the least restrictive limit or emission rate shall apply. An owner or operator shall control the emission of VOCs as follows:

(A) Use only coatings that have an as applied VOC content no greater than the applicable level in Table 20(s)-1, 20(s)-2, 20(s)-3, 20(s)-4, 20(s)-5, 20(s)-6a or 20(s)-6b;

(B) For a coating unit, use a combination of low-VOC coatings and add-on air pollution control equipment to achieve a VOC emission rate no greater than the applicable level in Table 20(s)-7, 20(s)-8, 20(s)-9, or 20(s)-10;

(C) Install, operate and maintain according to the manufacturer’s recommendations air pollution control equipment with an overall control efficiency of at least 90%; or

6087

- (D) Achieve a level of control that is equivalent to subparagraph (A), (B) or (C) of this subdivision, as requested from and approved by the commissioner, in accordance with subsection (cc) of this section.
 - (E) An owner or operator controlling emissions as provided in subparagraph (A), (B), (C) or (D) of this subdivision is exempt from any obligation to comply with subsection (bb) of this section.
 - (F) The requirements of subparagraphs (A), (B), (C) or (D) of this subdivision shall not apply to a coating upon request to and approval by the commissioner and the Administrator. Any request for approval shall be made in writing and shall include a description of the noncompliant coating and its VOC content, an explanation of why the noncompliant coating is necessary, the aggregate amount in gallons or pounds of noncompliant coating use anticipated in a 12-month period and the frequency of use of the noncompliant coating.
- (4) Application methods. Except as provided in subdivision (7) of this subsection, an owner or operator shall not apply a VOC-containing coating to a miscellaneous metal and plastic part unless the coating is applied by one of the methods identified in subparagraphs (A) through (I) of this subdivision using equipment operated in accordance with the specifications of the equipment manufacturer:
- (A) Electrostatic application;
 - (B) Flow coating;
 - (C) Dip coating;
 - (D) Roll coating;
 - (E) HVLP spray application;
 - (F) Airless spray application;
 - (G) Air-assisted airless spray application;
 - (H) Hand application; or
 - (I) Any other coating application method capable of achieving a transfer efficiency equivalent to or better than that provided by HVLP spray application. Any owner or operator using an application method pursuant to this subparagraph shall maintain records demonstrating the transfer efficiency achieved.
- (5) Work practices. Each owner or operator shall use the following work practices:
- (A) New and used VOC-containing coating, diluent or cleaning solvent, including a coating mixed on the premises, shall be stored in a nonabsorbent, non-leaking container. Such a container shall be kept closed at all times except when the container is being filled, emptied or is otherwise actively in use;
 - (B) Spills and leaks of VOC-containing coating, diluent or cleaning solvent shall be minimized. Any leaked or spilled VOC-containing coating, diluent or cleaning solvent shall be absorbed and removed immediately;

6087

- (C) Absorbent applicators, such as cloth and paper, which are moistened with a VOC-containing coating or solvent, shall be stored in a closed, nonabsorbent, non-leaking container for disposal or recycling; and
- (D) VOC-containing coating, diluent and cleaning solvent shall be conveyed from one location to another in a closed container or pipe.
- (6) Notwithstanding the requirements of this subsection, an owner or operator complying with this subsection by operating under a valid permit or order issued pursuant to subsection (cc)(2) or (cc)(3) of this section shall continue to operate according to the terms of such permit or order.
- (7) Exemptions and exceptions.
- (A) The requirements of this subsection shall not apply to any of the following activities, and the VOC emissions resulting from the following activities shall not be included in determinations pursuant to subdivisions (2) and (7)(G) of this subsection:
- (i) Coating and cleaning subject to one of the following subsections of this section: (l) through (r) and (hh) through (kk),
 - (ii) Coating applied in an automotive refinishing operation and related cleaning,
 - (iii) Coating and associated surface preparation and cleanup subject to section 22a-174-41 of the Regulations of Connecticut State Agencies,
 - (iv) Coating applied to test materials, test panels and coupons in research and development, quality control or performance testing,
 - (v) Coating applied in a shipbuilding and repair operation, provided that the operation is subject to 40 CFR 63 Subpart II,
 - (vi) Coating applied to space vehicles and related cleaning,
 - (vii) Coating applied to antique aerospace vehicles and related cleaning,
 - (viii) Coating applied with a hand-held aerosol can,
 - (ix) Adhesive, sealant, adhesive primer or sealant primer regulated by section 22a-174-44 of the Regulations of Connecticut State Agencies,
 - (x) Quality control or inspection dyes applied to metal parts,
 - (xi) Use of coatings containing VOC at concentrations less than 1.0 percent by weight,
 - (xii) Use of cleaning solvents containing VOC at concentrations less than 5.0 percent by weight, or
 - (xiii) Maintenance coating and related cleaning of fixtures, equipment and components that are not products manufactured by the facility or products coated on a contract basis.
- (B) The requirements of subdivisions (3) and (4) of this subsection shall not apply to the application of any of the following coatings to metal parts:

6087

- (i) Stencil coating,
 - (ii) Safety-indicating coating,
 - (iii) Solid-film lubricant,
 - (iv) Electric-insulating and thermal-conducting coating,
 - (v) Magnetic data storage disk coating,
 - (vi) Plastic extruded onto metal parts to form a coating, or
 - (vii) Powder coating.
- (C) The requirements of subdivision (3) of this subsection shall not apply to the application of any of the following coatings to plastic parts:
- (i) Touch-up and repair coating,
 - (ii) Stencil coating applied on a clear or transparent substrate,
 - (iii) Clear or translucent coating,
 - (iv) Reflective coating applied to a highway cone,
 - (v) Mask coating less than 0.5 millimeters thick applied to an area less than 25 square inches,
 - (vi) EMI/RFI shield coating,
 - (vii) Any heparin-benzalkonium chloride (HBAC)-containing coating applied to a medical device, provided that the total of all HBAC-containing coatings used at a facility does not exceed 100 gallons per year, or
 - (viii) Powder coating.
- (D) The requirements of subdivision (3) of this subsection shall not apply to the application of any of the following coatings to automotive-transportation and business machine parts:
- (i) Vacuum metalizing coating,
 - (ii) Gloss reducer,
 - (iii) Texture coat,
 - (iv) Adhesion bonding primer,
 - (v) Electrostatic preparation coating,
 - (vi) Resist coating,
 - (vii) Stencil coating, or

6087

- (viii) Powder coating.
- (E) The requirements of subdivisions (3) and (4) of this subsection shall not apply to the application of any of the following specialty coatings to an aerospace vehicle or component:
 - (i) Touch-up coating, or
 - (ii) Aerospace coating that the United States Department of Defense has designated as classified information in accordance with 32 CFR 2001.
- (F) The requirements of subdivision (4) of this subsection shall not apply to the following activities:
 - (i) Application of touch-up and repair coating to metal parts,
 - (ii) Application of textured finish to metal parts,
 - (iii) Application of powder coating to:
 - (I) Plastic parts,
 - (II) Automotive-transportation plastic parts, or
 - (III) Business machine plastic parts,
 - (iv) Airbrush application of coating to metal or plastic parts using no more than five gallons of coating per year,
 - (v) Use of air pollution control equipment to comply with subdivision (3) of this subsection, or
 - (vi) Application of specialty coatings listed in Table 20(s)-6a of this subsection.
- (G) An owner or operator with total potential VOC emissions from all miscellaneous metal and plastic parts coating, including emissions from related cleaning, limited by permit or order of the commissioner to 1,666 pounds or less in any calendar month, shall not be subject to the requirements of subdivision (3) of this subsection, provided that the owner or operator operates in compliance with such permit or order.
- (H) An owner or operator may use, in the aggregate, in any 12 consecutive months no more than 55 gallons of miscellaneous metal or plastic parts coating or coatings that exceed the VOC content limits or emission limits of subdivision (3) of this subsection provided the owner or operator maintains records of non-compliant coating use.
- (I) An owner or operator operating pursuant to an exemption or exception set out in this subdivision shall maintain records sufficient to verify the applicability of the exemption or exception.
- (8) Records.
 - (A) An owner or operator shall maintain records of information sufficient to determine compliance with the applicable requirements of this subsection, including, at a minimum, the following information for each calendar month:

6087

- (i) Name and description of each coating and cleaning solvent.
 - (ii) VOC content of each coating and diluent, as applied, and the associated calculations.
 - (iii) VOC content of each coating or cleaning solvent, as supplied.
 - (iv) The amount of each coating and cleaning solvent:
 - (I) Purchased, or
 - (II) Used.
 - (v) A Material Safety Data Sheet, Environmental Data Sheet, Certified Product Data Sheet, or an equivalent data sheet for each coating and cleaning solvent.
 - (vi) Documentation of control device efficiency and capture efficiency, if applicable, using an applicable EPA reference method or alternate method as approved by the commissioner and the Administrator, and
 - (vii) Date and type of maintenance performed on air pollution control equipment, if applicable.
- (B) All records made pursuant to this subdivision shall be:
- (i) Made available to the commissioner to inspect and copy upon request, and
 - (ii) Maintained for five years from the date such record is created.
- (9) Compliance procedures.
- (A) The VOC content limits of Table 20(s)-1, 20(s)-2, 20(s)-3, 20(s)-4, 20(s)-5, 20(s)-6a or 20(s)-6b apply to the volume of coating as applied, determined using the following equation:
- $$VOC\ Content = (Ws - Ww - Wes) / (Vm - Vw - Ves)$$
- Where: Ws = weight of volatile compounds in grams
Ww = weight of water in grams
Wes = weight of exempt compounds in grams
Vm = volume of coating in liters
Vw = volume of water in liters
Ves = volume of exempt compounds in liters
- (B) The VOC emission rate limits of Table 20(s)-7, 20(s)-8, 20(s)-9, or 20(s)-10 apply to the mass of VOC emitted per volume of coating solids, as applied.
- (C) To determine the properties of a coating or components thereof in order to perform the calculations required pursuant to subparagraph (A) of this subdivision or to verify calculations based on the manufacturer's formulation data, the VOC and solids content of all coatings shall be determined using 40 CFR 60, Appendix A, Reference Method 24 or an equivalent method. In the case of a dispute, the VOC content determined using Reference Method 24 shall control, unless a person is able to demonstrate to the

6087

satisfaction of the commissioner and the Administrator that the manufacturer's formulation data are correct.

- (D) For red, yellow or black automotive coatings, except touch-up and repair coatings, the applicable VOC content limit or emission rate shall be the limit of Table 20(s)-3 or 20(s)-9, as applicable, multiplied by 1.15.
- (E) Where a VOC content limit or emissions rate is provided in metric units and equivalent English units, the limit or rate in metric units defines the standard. The English units are provided for information only.
- (F) A miscellaneous metal or plastic parts coating shall be defined and categorized based on the manufacturer's representations as set out on the container or label or in information provided by the manufacturer of such a miscellaneous metal or plastic parts coating.
- (10) Limitations on potential to emit.
- (A) An owner or operator may submit a request to the commissioner for an order or permit to limit potential emissions from all miscellaneous metal and plastic parts coating at the premises to a monthly limit of 1,666 pounds of VOC; or
- (B) An owner or operator issued a permit or order prior to January 1, 2013 pursuant to former section 22a-174-20(s)(7) of the Regulations of Connecticut State Agencies may:
- (i) Continue after January 1, 2013 to conduct miscellaneous metal parts coating in compliance with such a permit or order,
- (ii) Submit a request to the commissioner to modify the order or permit to include all miscellaneous metal and plastic parts coating at the premises in the monthly limit of 1,666 pounds of VOC, or
- (iii) Submit a request to the commissioner to revoke the order or permit.

<u>Coating Category</u>	<u>Air Dried</u>		<u>Baked</u>	
	<u>g VOC/ liter coating</u>	<u>lbs VOC/ gal coating</u>	<u>g VOC/ liter coating</u>	<u>lbs VOC/ gal coating</u>
<u>General one-component</u>	<u>340</u>	<u>2.8</u>	<u>280</u>	<u>2.3</u>
<u>General multi-component</u>	<u>340</u>	<u>2.8</u>	<u>280</u>	<u>2.3</u>
<u>Camouflage</u>	<u>420</u>	<u>3.5</u>	<u>420</u>	<u>3.5</u>
<u>Electric-insulating varnish</u>	<u>420</u>	<u>3.5</u>	<u>420</u>	<u>3.5</u>
<u>Etching filler</u>	<u>420</u>	<u>3.5</u>	<u>420</u>	<u>3.5</u>
<u>Extreme high-gloss</u>	<u>420</u>	<u>3.5</u>	<u>360</u>	<u>3.0</u>
<u>Extreme performance</u>	<u>420</u>	<u>3.5</u>	<u>360</u>	<u>3.0</u>
<u>Heat-resistant</u>	<u>420</u>	<u>3.5</u>	<u>360</u>	<u>3.0</u>
<u>High performance architectural</u>	<u>740</u>	<u>6.2</u>	<u>740</u>	<u>6.2</u>
<u>High temperature</u>	<u>420</u>	<u>3.5</u>	<u>420</u>	<u>3.5</u>
<u>Metallic</u>	<u>420</u>	<u>3.5</u>	<u>420</u>	<u>3.5</u>
<u>Mold-seal</u>	<u>420</u>	<u>3.5</u>	<u>420</u>	<u>3.5</u>
<u>Pan backing</u>	<u>420</u>	<u>3.5</u>	<u>420</u>	<u>3.5</u>

6087

<u>Prefabricated architectural multi-component</u>	<u>420</u>	<u>3.5</u>	<u>280</u>	<u>2.3</u>
<u>Prefabricated architectural one-component</u>	<u>420</u>	<u>3.5</u>	<u>280</u>	<u>2.3</u>
<u>Pretreatment coating</u>	<u>420</u>	<u>3.5</u>	<u>420</u>	<u>3.5</u>
<u>Repair and touch-up</u>	<u>420</u>	<u>3.5</u>	<u>360</u>	<u>3.0</u>
<u>Silicone release</u>	<u>420</u>	<u>3.5</u>	<u>420</u>	<u>3.5</u>
<u>Solar-absorbent</u>	<u>420</u>	<u>3.5</u>	<u>360</u>	<u>3.0</u>
<u>Vacuum-metalizing</u>	<u>420</u>	<u>3.5</u>	<u>420</u>	<u>3.5</u>
<u>Drum coating, new, exterior</u>	<u>340</u>	<u>2.8</u>	<u>340</u>	<u>2.8</u>
<u>Drum coating, new, interior</u>	<u>420</u>	<u>3.5</u>	<u>420</u>	<u>3.5</u>
<u>Drum coating, reconditioned, exterior</u>	<u>420</u>	<u>3.5</u>	<u>420</u>	<u>3.5</u>
<u>Drum coating, reconditioned, interior</u>	<u>500</u>	<u>4.2</u>	<u>500</u>	<u>4.2</u>

Table 20(s)-2 Plastic Parts Coating VOC Content Limits		
Coating Category	g VOC/liter coating	lbs VOC/gal coating
<u>General one-component</u>	<u>280</u>	<u>2.3</u>
<u>General multi-component</u>	<u>420</u>	<u>3.5</u>
<u>Electric dissipating coatings and shock-free coating</u>	<u>800</u>	<u>6.7</u>
<u>Extreme performance multi-component</u>	<u>420</u>	<u>3.5</u>
<u>Metallic</u>	<u>420</u>	<u>3.5</u>
<u>Mold-seal</u>	<u>760</u>	<u>6.3</u>
<u>Multi-colored coating</u>	<u>680</u>	<u>5.7</u>
<u>Optical coating</u>	<u>800</u>	<u>6.7</u>
<u>Vacuum-metalizing</u>	<u>800</u>	<u>6.7</u>

Table 20(s)-3 Automotive-Transportation Plastic Parts Coating VOC Content Limits		
Coating Category	g VOC/liter coating	lbs VOC/gal coating
I. High bake coatings – interior and exterior parts		
<u>Flexible primer</u>	<u>540</u>	<u>4.5</u>
<u>Non-flexible primer</u>	<u>420</u>	<u>3.5</u>
<u>Base coat</u>	<u>520</u>	<u>4.3</u>
<u>Clear coat</u>	<u>480</u>	<u>4.0</u>
<u>Non-base coat/clear coat</u>	<u>520</u>	<u>4.3</u>
II. Low bake/air dried coatings – exterior parts		
<u>Primer</u>	<u>580</u>	<u>4.8</u>
<u>Base coat</u>	<u>600</u>	<u>5.0</u>
<u>Clearcoat</u>	<u>540</u>	<u>4.5</u>
<u>Non-base coat/clearcoat</u>	<u>600</u>	<u>5.0</u>
III. Low bake/air dried coatings – interior parts		
	<u>600</u>	<u>5.0</u>
IV. Touchup and repair coating		
	<u>620</u>	<u>5.2</u>

--

6087

Table 20(s)-4		
Business Machine Plastic Parts Coating VOC Content Limits		
Coating Category	g VOC/liter coating	lbs VOC/gal coating
<u>I. Primers</u>	<u>350</u>	<u>2.9</u>
<u>II. Topcoat</u>	<u>350</u>	<u>2.9</u>
<u>III. Texture coat</u>	<u>350</u>	<u>2.9</u>
<u>IV. Fog coat</u>	<u>260</u>	<u>2.2</u>
<u>V. Touchup and repair</u>	<u>350</u>	<u>2.9</u>

Table 20(s)-5		
Motor Vehicle Materials VOC Content Limits		
Coating Category	g VOC/liter coating	lbs VOC/gal coating
<u>Motor vehicle cavity wax</u>	<u>650</u>	<u>5.4</u>
<u>Motor vehicle sealer</u>	<u>650</u>	<u>5.4</u>
<u>Motor vehicle deadener</u>	<u>650</u>	<u>5.4</u>
<u>Motor vehicle gasket/gasket sealing material</u>	<u>200</u>	<u>1.7</u>
<u>Motor vehicle underbody coating</u>	<u>650</u>	<u>5.4</u>
<u>Motor vehicle trunk interior coating</u>	<u>650</u>	<u>5.4</u>
<u>Motor vehicle bedliner coating</u>	<u>200</u>	<u>1.7</u>
<u>Motor vehicle lubricating wax/compound</u>	<u>700</u>	<u>5.8</u>

Table 20(s)-6a	
Aerospace Specialty Coating VOC Content Limits	
Coating type	g VOC/liter coating
<u>Ablative coating</u>	<u>600</u>
<u>Adhesion promoter</u>	<u>890</u>
<u>Adhesive bonding primers:</u>	
<u>Cured at 250°F or below</u>	<u>850</u>
<u>Cured above 250°F</u>	<u>1030</u>
<u>Adhesives:</u>	
<u>Commercial interior adhesive</u>	<u>760</u>
<u>Cyanoacrylate adhesive</u>	<u>1,020</u>
<u>Fuel tank adhesive</u>	<u>620</u>
<u>Nonstructural adhesive</u>	<u>360</u>
<u>Rocket motor bonding adhesive</u>	<u>890</u>
<u>Rubber-based adhesive</u>	<u>850</u>
<u>Structural autoclavable adhesive</u>	<u>60</u>
<u>Structural nonautoclavable adhesive</u>	<u>850</u>
<u>Aerospace high-temperature coating</u>	<u>850</u>
<u>Antichafe coating</u>	<u>660</u>
<u>Bearing coating</u>	<u>620</u>
<u>Caulking and smoothing compounds</u>	<u>850</u>
<u>Chemical agent-resistant coating</u>	<u>550</u>
<u>Clear coating</u>	<u>720</u>

6087

<u>Commercial exterior aerodynamic structure primer</u>	<u>650</u>
<u>Compatible substrate primer</u>	<u>780</u>
<u>Corrosion prevention compound</u>	<u>710</u>
<u>Cryogenic flexible primer</u>	<u>645</u>
<u>Cryoprotective coating</u>	<u>600</u>
<u>Dry lubricative material</u>	<u>880</u>
<u>Electric or radiation-effect coating</u>	<u>800</u>
<u>Electrostatic discharge and electromagnetic interference (EMI) coating</u>	<u>800</u>
<u>Elevated-temperature Skydrol-resistant commercial primer</u>	<u>740</u>
<u>Epoxy polyamide topcoat</u>	<u>660</u>
<u>Fire-resistant interior coating</u>	<u>800</u>
<u>Flexible primer</u>	<u>640</u>
<u>Flight-test coatings:</u>	
<u>Missile or single use aircraft</u>	<u>420</u>
<u>All other</u>	<u>840</u>
<u>Fuel-tank coating</u>	<u>720</u>
<u>Insulation covering</u>	<u>740</u>
<u>Intermediate release coating</u>	<u>750</u>
<u>Lacquer</u>	<u>830</u>
<u>Maskants:</u>	
<u>Bonding maskant</u>	<u>1,230</u>
<u>Critical use and line sealer maskant</u>	<u>1,020</u>
<u>Seal coat maskant</u>	<u>1,230</u>
<u>Metallized epoxy coating</u>	<u>740</u>
<u>Mold release</u>	<u>780</u>
<u>Optical anti-reflective coating</u>	<u>750</u>
<u>Part marking coating</u>	<u>850</u>
<u>Pretreatment coating</u>	<u>780</u>
<u>Rain erosion-resistant coating</u>	<u>850</u>
<u>Rocket motor nozzle coating</u>	<u>660</u>
<u>Scale inhibitor</u>	<u>880</u>
<u>Screen print ink</u>	<u>840</u>
<u>Sealants:</u>	
<u>Extrudable/rollable/brushable sealant</u>	<u>280</u>
<u>Sprayable sealant</u>	<u>600</u>
<u>Silicone insulation material</u>	<u>850</u>
<u>Solid film lubricant</u>	<u>880</u>
<u>Specialized function coating</u>	<u>890</u>
<u>Temporary protective coating</u>	<u>320</u>
<u>Thermal control coating</u>	<u>800</u>
<u>Wet fastener installation coating</u>	<u>675</u>
<u>Wing coating</u>	<u>850</u>

6087

Coating type	g VOC/liter coating
Primer – general aviation rework facilities	540
Exterior primer – large commercial aircraft components	650
Exterior primer – fully assembled, large commercial aircraft	650
Primer	350
Topcoat	420
Topcoat – general aviation rework facilities	540
Self-priming topcoat	420
Self-priming topcoat – general aviation rework facilities	540
Type I chemical milling maskant	622
Type II chemical milling maskant	160

Coating Category	Air Dried		Baked	
	g VOC/ liter solids	lb VOC/ gal solids	g VOC/ liter solids	lb VOC/ gal solids
General one-component	540	4.52	400	3.35
General multi-component	540	4.52	400	3.35
Camouflage	800	6.67	800	6.67
Electric-insulating varnish	800	6.67	800	6.67
Etching filler	800	6.67	800	6.67
Extreme high-gloss	800	6.67	610	5.06
Extreme performance	800	6.67	610	5.06
Heat-resistant	800	6.67	610	5.06
High performance architectural	4560	38	4560	38
High temperature	800	6.67	800	6.67
Metallic	800	6.67	800	6.67
Mold-seal	800	6.67	800	6.67
Pan backing	800	6.67	800	6.67
Prefabricated architectural multi-component	800	6.67	400	3.35
Prefabricated architectural one-component	800	6.67	400	3.35
Pretreatment coating	800	6.67	800	6.67
Silicone release	800	6.67	800	6.67
Solar-absorbent	800	6.67	610	5.06
Vacuum-metalizing	800	6.67	800	6.67
Drum coating, new, exterior	540	4.52	540	4.52
Drum coating, new, interior	800	6.67	800	6.67
Drum coating, reconditioned, exterior	800	6.67	800	6.67
Drum coating, reconditioned, interior	1170	9.78	1170	9.78

6087

Table 20(s)-8		
Plastic Parts Coating VOC Emission Rate Limits		
Coating Category	g VOC/liter solids	lbs VOC/gal solids
General one-component	400	3.35
General multi-component	800	6.67
Electric dissipating coatings and shock-free coatings	8960	74.7
Extreme performance multi-component	800	6.67
Metallic	800	6.67
Mold-seal	5240	43.7
Multi-colored coatings	3040	25.3
Optical coatings	8960	74.7
Vacuum-metalizing	8960	74.7

Table 20(s)-9		
Automotive-Transportation Plastic Parts Coating VOC Emission Rate Limits		
Coating Category	g VOC/liter solids	lbs VOC/gal solids
I. High bake coatings – interior and exterior parts		
Flexible primer	1390	11.58
Non-flexible primer	800	6.67
Base coat	1240	10.34
Clear coat	1050	8.76
Non-base coat/clear coat	1240	10.34
II. Low bake/air dried coatings – exterior parts		
Primer	1660	13.8
Base coat	1870	15.59
Clearcoat	1390	11.58
Non-base coat/clearcoat	1870	15.59
III. Low bake/air dried coatings – interior parts		
	1870	15.59
IV. Touch-up and repair coating		
	2130	17.72

Table 20(s)-10		
Business Machine Plastic Parts Coating VOC Emission Rate Limits		
Coating Category	g VOC/liter solids	lbs VOC/gal solids
I. Primers	570	4.80
II. Topcoat	570	4.80
III. Texture coat	570	4.80
IV. Fog coat	380	3.14
V. Touchup and repair	570	4.80

6087

Sec. 2. Subdivision (1) of subsection (aa) of section 22a-174-20 of the Regulations of Connecticut State Agencies is amended to read as follows:

(aa) Record keeping requirements and test methods.

(1) The owner or "operator" of any premise subject to the provisions of subsections (m) through [(s)] (r) inclusive and subsection (v) of section 22a-174-20 shall maintain daily records of all coatings and diluents used. Such records shall be kept for each individual machine, operation or coating line. The records must contain the information required below.

- (A) description of the coating including the coating name and the coating density in pounds per gallon;
- (B) "volatile organic compound" content by weight;
- (C) water and exempt volatile organic compound content by weight;
- (D) non-volatile content by volume and by weight;
- (E) amount of each coating used in gallons;
- (F) total amount of diluent used for each coating in pounds and in gallons.

Sec. 3. Subdivisions (2) and (3) of subsection (cc) of section 22a-174-20 of the Regulations of Connecticut State Agencies are amended to read as follows:

[(cc)(2)] (2) The implementation of an alternative emission reduction plan instead of compliance with the ["emissions limitation"] prescribed in any one of subsections (m) through (v), inclusive, [and] (ee) or (ff) to (kk), inclusive, of this section [must] shall be expressly approved by the ["Commissioner"] commissioner through the issuance of a permit or an order in accordance with the provisions of section 22a-174-12 of the Regulations of Connecticut State Agencies and approved by the ["administrator"] Administrator in accordance with the provisions of 42 [U.S.C.] USC 7401-7642. After approval, any emissions in excess of those established for each emission source under the plan will be a violation of these regulations.

[(cc)(3)] (3) Where it can be shown to the satisfaction of the ["Commissioner"] commissioner that an emission source cannot be controlled to comply with any one of subsections (m) through (v), inclusive, [and] (ee) or (ff) to (kk), inclusive, of this section for reasons of technological and economic feasibility, the ["Commissioner"] commissioner may by permit or order accept a lesser degree of control upon the submission of satisfactory evidence that the ["stationary source"] owner has applied ["Reasonably Available Control Technology"] and has a plan to develop the technologies necessary to comply with [the above subsections] the applicable subsection of subsections (m) to (v), inclusive, (ee) or (ff) to (kk), inclusive, of this section and such action is approved by the ["administrator"] Administrator in accordance with the provisions of 42 [U.S.C.] USC 7401-7642.

6087

Sec. 4. Section 22a-174-20(ii)(3)(A) of the Regulations of Connecticut State Agencies is amended to read as follows:

- (A) The requirements of this subsection shall not apply to the use of cleaning solvent as follows:
- (i) In janitorial cleaning,
 - (ii) At an aerospace manufacturing and rework operation or a wood furniture coating operation in accordance with an order or a permit issued pursuant to sections 22a-174-32(e) and 22a-174-20(cc) of the Regulations of Connecticut State Agencies,
 - (iii) To perform general solvent cleaning in accordance with an order issued pursuant to section 22a-174-20(ee) of the Regulations of the Connecticut State Agencies,
 - (iv) At any aerospace manufacturing and rework facility, provided that cleaning solvent is used in accordance with the requirements of 40 CFR 63.744, inclusive of exemptions,
 - (v) As surface preparation or cleanup solvent in accordance with section 22a-174-44 of the Regulations of Connecticut State Agencies,
 - (vi) Where the cleaning solvent is regulated pursuant to section 22a-174-40 of the Regulations of Connecticut State Agencies,
 - (vii) To perform industrial solvent cleaning where such cleaning or cleaning solvent is subject to one of the following subsections of this section: (l) through (y), (ff) through (hh), or (jj),
 - (viii) In cleaning, including surface preparation prior to coating, necessary to meet a standard or specification issued or approved by the United States Department of Defense, Federal Aviation Administration or other federal government entity. Any person claiming exemption pursuant to this clause shall maintain records of the standard or specification,
 - (ix) Associated with research and development,
 - (x) Associated with quality control or laboratory testing[,] of coatings, inks or adhesives.
 - (xi) Associated with medical device manufacturing,
 - (xii) Associated with pharmaceutical manufacturing,
 - (xiii) That exceeds the applicable limit of subdivision (4)(A) of this subsection where the quantity used does not exceed 55 gallons per any twelve-month rolling aggregate. Any person claiming exemption pursuant to this clause shall record and maintain monthly records sufficient to demonstrate compliance with this exemption, or
 - (xiv) That exceeds the applicable limit of subdivision (4)(A) of this subsection, if approved by the commissioner and the Administrator. Any request for approval shall be made in writing to the commissioner and Administrator and shall include a description of the cleaning solvent and its VOC content, an explanation of why the cleaning solvent is necessary, quantification of the amount of the VOC that will be emitted as a result of the use of the noncompliant cleaning solvent and the time period over which the noncompliant solvent will be used.

Sec. 5. Section 22a-174-20 of the Regulations of Connecticut State Agencies is amended by the addition of new subsection (kk), as follows:

6087

(NEW)

(kk) Pleasure craft coatings

- (1) Definitions. For the purposes of this section, the following definitions apply:
- (A) “Airless spray application” means a coating spray application system using high fluid pressure, without compressed air, to atomize the coating;
 - (B) “Air-assisted airless spray application” means a coating spray application system using fluid pressure to atomize the coating and low pressure air to adjust the shape of the spray pattern;
 - (C) “Antifouling coating” means a coating applied to the underwater portion of a pleasure craft to prevent or reduce the attachment of biological organisms;
 - (D) “Antifouling sealer or tie coat” means a coating applied over biocidal antifouling coating for the purpose of preventing release of biocides into the environment or to promote adhesion between an antifouling coating and a primer or another antifouling coating;
 - (E) “As applied” means the composition of coating, excluding water and exempt compounds, at the time it is applied to a surface, including any solvent, catalyst or other substance added to the coating;
 - (F) “Capture efficiency” means the ratio of VOC emissions delivered to the control device to the total VOC emissions resulting from pleasure craft coating and related cleaning, expressed as a percentage;
 - (G) “Control device efficiency” means the ratio of VOC emissions recovered or destroyed by the control device to the total VOC emissions that are introduced into the device, expressed as a percentage;
 - (H) “Electrostatic application” means a method of applying coating particles or coating droplets to a grounded surface by electrically charging such particles or droplets;
 - (I) “Exempt compound” means a carbon compound excluded from the definition of “volatile organic compound” as defined in section 22a-174-1 of the Regulations of Connecticut State Agencies;
 - (J) “Extreme high-gloss coating” means a coating that, when tested by American Society for Testing Material Test Method D523-08, Standard Test Method for Specular Gloss, shows a reflectance of 90 or more on a 60 degree meter;
 - (K) “Finish primer or surfacer” means a coating applied with a wet film thickness of less than 10 millimeters prior to the application of a topcoat for purposes of providing corrosion resistance, adhesion of subsequent coatings, a moisture barrier or promotion of a uniform surface necessary for filling in surface imperfections;
 - (L) “Flow coating” means a non-atomized technique of applying coating in a fan pattern to a substrate using a fluid nozzle with no air supplied to the nozzle;

6087

- (M) "High build primer or surfacer" means a coating applied with a wet film thickness of 10 millimeters or more prior to the application of a topcoat for purposes of providing corrosion resistance, adhesion of subsequent coatings, a moisture barrier or promotion of a uniform surface necessary for filling in surface imperfections;
- (N) "High gloss coating" means a coating that, when tested by American Society for Testing Material Test Method D523-08, Standard Test Method for Specular Gloss, shows a reflectance of 85 or more on a 60 degree meter;
- (O) "HVLP spray application" means to apply a coating using a coating application system that uses lower air pressure and higher volume than conventional air atomized spray systems, where the manufacturer has represented that the system is HVLP by affixing a permanent label or through representations on the packaging or other product literature;
- (P) "Overall control efficiency" means the product of the capture efficiency and the control device efficiency;
- (Q) "Pleasure craft" means any marine or freshwater vessel manufactured or operated primarily for recreational purposes;
- (R) "Pleasure craft coating" means any marine coating, except unsaturated polyester resin (fiberglass), applied to a pleasure craft or to parts and components of a pleasure craft;
- (S) "Pretreatment wash primer" means a coating, containing at least 0.1 percent acid by weight and no more than 25 percent solids by weight, that is used to provide surface etching and is applied directly to fiberglass and metal surfaces to provide corrosion resistance and adhesion of subsequent coatings;
- (T) "Related cleaning" means the removal of uncured coatings, coating residue, and contaminants from:
- (i) Pleasure craft or parts and components of pleasure craft prior to the application of coatings,
 - (ii) Pleasure craft or parts and components of pleasure craft between coating applications, or
 - (iii) Transfer lines, storage tanks, spray booths, and coating application equipment; and
- (U) "Transfer efficiency" means the portion of coating solids that adheres to the pleasure craft surface during the application process, expressed as a percentage of the total volume of coating solids delivered by the applicator.
- (2) Applicability.
- (A) Except as provided in subdivision (3) of this subsection, the provisions of this subsection apply to the owner or operator of any marina, boat yard, or other premises where pleasure craft coating is applied for commercial purposes at the direction of such owner or operator, if:
- (i) Such owner or operator was subject to subsection (s) of this section prior to January 1, 2013, or

6087

- (ii) Such owner or operator purchases for use in all pleasure craft coating and related cleaning at the premises 855 gallons or more of coatings and cleaning solvents in aggregate per rolling 12-month period;
 - (B) An owner or operator subject to this subsection shall:
 - (i) For a source operating prior to January 1, 2013, comply with the requirements of this subsection no later than January 1, 2013, or
 - (ii) For a source that commences operation after January 1, 2013, comply with the requirements of this subsection upon commencing operation; and
 - (C) Any owner or operator subject to this subsection shall remain subject to this subsection.
 - (D) An owner or operator of any marina, boat yard, or other premises where pleasure craft coating is applied for commercial purposes who does not meet the applicability thresholds of subparagraph (A) of this subdivision shall maintain either material purchase or actual usage records to verify that this subsection does not apply to such owner or operator.
- (3) Exemptions and exceptions.
- (A) The requirements of this subsection shall not apply to any of the following activities, and the VOC emissions resulting from the following activities shall not be included in determinations pursuant to subdivision (2) or (4)(E) of this subsection:
 - (i) Coating and cleaning subject to one of the following subsections of this section: (l) through (s) and (hh) through (jj),
 - (ii) Coating and associated surface preparation and cleanup subject to section 22a-174-41 of the Regulations of Connecticut State Agencies,
 - (iii) Coating applied with a hand-held aerosol can,
 - (iv) Application of adhesive, sealant, adhesive primer or sealant primer regulated by section 22a-174-44 of the Regulations of Connecticut State Agencies,
 - (v) Coating applied to test materials, test panels and coupons in research and development, quality control or performance testing,
 - (vi) Use of coatings containing VOC at concentrations less than 1.0 percent by weight, or
 - (vii) Use of cleaning solvents containing VOC at concentrations less than 5.0 percent by weight.
 - (B) An owner or operator operating pursuant to an exception or exemption provided in subparagraph (A) of this subdivision shall maintain records sufficient to verify the applicability of the exception or exemption.
 - (C) An owner or operator may use in aggregate in any 12 consecutive months no more than 55 gallons of pleasure craft coatings that exceed the VOC content limits or emission limits of subdivision (4) of this subsection.

6087

(4) On and after January 1, 2013, no owner or operator of a pleasure craft coating operation shall apply any coating, inclusive of any VOC-containing material added to the original coating supplied by the manufacturer, unless the owner or operator controls emissions of VOCs in accordance with subparagraph (A), (B), (C), (D) or (E) of this subdivision. If more than one emission limit or emission rate applies in a particular situation, then the least restrictive limit or rate shall apply. An owner or operator shall:

- (A) Use only coatings that have an as applied VOC content no greater than the applicable level in Table 20(kk)-1;
- (B) Use a combination of low-VOC coatings and add-on air pollution control equipment to achieve a VOC emission rate no greater than the applicable level in Table 20(kk)-2;
- (C) Install, operate and maintain according to the manufacturer's recommendations air pollution control equipment with an overall control efficiency of at least 90%;
- (D) Use an alternative means, achieving a level of control equivalent to subparagraph (A), (B) or (C) of this subdivision, as requested from and approved by the commissioner, in accordance with subsection (cc) of this section; or
- (E) Limit the total potential VOC emissions from all pleasure craft coating operations and related cleaning by permit or order of the commissioner to 1,666 pounds or less in any calendar month.

(5) Application methods. Except as provided in subdivision (3) of this subsection, an owner or operator shall not apply a VOC-containing coating to a pleasure craft or to a part or component of a pleasure craft unless the coating is applied by one of the methods identified in subparagraphs (A) through (F) of this subdivision using equipment operated in accordance with the specifications of the equipment manufacturer:

- (A) Electrostatic application;
- (B) HVLP spray application;
- (C) Airless spray application;
- (D) Air-assisted airless spray application;
- (E) Hand application; or
- (F) Any other coating application method capable of achieving a transfer efficiency equivalent to or better than that provided by HVLP spray application. Any coating operation using an application method pursuant to this subparagraph shall maintain records demonstrating the transfer efficiency achieved.
- (G) The requirements of this subdivision shall not apply to the application of an extreme high gloss coating.

(6) Work practices. Each owner or operator shall use the following work practices:

- (A) New and used VOC-containing coating, diluent or cleaning solvent, including a coating mixed on the premises, shall be stored in a nonabsorbent, non-leaking container. Such a container shall be kept closed at all times except when the container is being filled, emptied or is otherwise actively in use;

6087

- (B) Spills and leaks of VOC-containing coating, diluent or cleaning solvent shall be minimized. Any leaked or spilled VOC-containing coating, diluent or cleaning solvent shall be contained, absorbed and removed immediately;
- (C) Absorbent applicators, such as cloth and paper, which are moistened with a VOC-containing coating or solvent, shall be stored in a closed, nonabsorbent, non-leaking container for disposal or recycling; and
- (D) VOC-containing coating, diluent and cleaning solvent shall be conveyed from one location to another in a closed container or pipe.
- (7) Records.
- (A) Except as provided in subparagraphs (B) and (C), an owner or operator shall maintain records of information sufficient to determine compliance with the applicable requirements of this subsection, including, at a minimum, the following information for each calendar month:
- (i) Name and description of each coating and cleaning solvent,
 - (ii) VOC content of each coating and diluent, as applied, and the associated calculations,
 - (iii) VOC content of each coating or cleaning solvent, as supplied,
 - (iv) The amount of each coating and cleaning solvent:
 - (I) Purchased, or
 - (II) Used,
 - (v) A Material Safety Data Sheet, Environmental Data Sheet, Certified Product Data Sheet, or an equivalent data sheet for each coating and cleaning solvent,
 - (vi) Documentation of control device efficiency and capture efficiency, if applicable, using an applicable EPA reference method or alternate method as approved by the commissioner and the Administrator, and
 - (vii) Date and type of maintenance performed on air pollution control equipment, if applicable.
- (B) All records made pursuant to this subdivision shall be:
- (i) Made available to the commissioner to inspect and copy upon request, and
 - (ii) Maintained for five years from the date such record is created.
- (8) Compliance procedures.
- (A) The VOC content limits of Table 20(kk)-1 apply to the volume of coating as applied, determined using the following equation:

$$VOC\ Content = (Ws - Ww - Wes) / (Vm - Vw - Ves)$$

6087

Where: W_s = weight of volatile compounds in grams
 W_w = weight of water in grams
 W_{es} = weight of exempt compounds in grams
 V_m = volume of coating in liters
 V_w = volume of water in liters
 V_{es} = volume of exempt compounds in liters

- (B) The VOC emission rate limits of Table 20(kk)-2 apply to the mass of VOC emitted per volume of coating solids, as applied.
- (C) To determine the properties of a coating or components thereof in order to perform the calculations required pursuant to subparagraph (A) of this subdivision or to verify calculations based on the manufacturer's formulation data, the VOC and solids content of all coatings shall be determined using 40 CFR 60, Appendix A, Reference Method 24 or an equivalent method. In the case of a dispute, the VOC content determined using Reference Method 24 shall control, unless a person is able to demonstrate to the satisfaction of the commissioner and the Administrator that the manufacturer's formulation data are correct.
- (D) Where a VOC content limit or emissions rate is provided in metric units and equivalent English units, the limit or rate in metric units defines the standard. The English units are provided for information only.
- (E) A pleasure craft coating shall be defined and categorized based on the manufacturer's representations as set out on the container or label or in information provided by the manufacturer of such a pleasure craft coating.

Coating Category	g VOC/liter coating	lbs VOC/gal coating
Extreme high-gloss coating	600	5.0
High gloss coating	420	3.5
Pretreatment wash primer	780	6.5
Finish primer or surfacer	Effective until December 31, 2015: 600 Effective January 1, 2016: 420	Effective until December 31, 2015: 5.0 Effective January 1, 2016: 3.5
High build primer or surfacer	340	2.8
Antifouling coating – aluminum substrate	560	4.7
Antifouling coating – all other substrates	400	3.3
Antifouling sealant or tie coat	420	3.5
All other pleasure craft surface coatings for metal or plastic	420	3.5

6087

Table 20(kk)-2 Pleasure Craft Surface Coating VOC Emission Rate Limits		
Coating Category	g VOC/liter solids	lbs VOC/gal solids
Extreme high-gloss coating	1100	9.2
High gloss coating	800	6.7
Pretreatment wash primer	6670	55.6
Finish primer or surfacer	Effective until December 31, 2015: 1870 Effective January 1, 2016: 800	Effective until December 31, 2015: 15.59 Effective January 1, 2016: 6.7
High build primer or surfacer	550	4.6
Antifouling coating – aluminum substrate	1530	12.8
Antifouling coating – all other substrates	764	6.4
Antifouling sealer or tie coat	800	6.7
All other pleasure craft surface coatings for metal or plastic	800	6.7

Statement of purpose

The main purpose of this proposal is to enhance existing and add new requirements to control volatile organic compound (VOC) emissions from two types of surface coating operations. VOC emissions are a precursor to ground-level ozone, a harmful air pollutant. The U.S. Environmental Protection Agency (EPA) has designated the entire state as nonattainment for the 2008 ozone national ambient air quality standard (NAAQS) and has initiated the statutorily required review of the NAAQS to be completed in 2013. The proposed limitations on VOC emissions will assist Connecticut to attain and maintain the federal ozone NAAQS.

The Department of Energy and Environmental Protection (DEEP) currently regulates VOC emissions from metal parts coating under section 22a-174-20 of the Regulations of Connecticut State Agencies (RCSA). In response to EPA guidance, DEEP is proposing to add more stringent VOC control requirements for metal parts and to broaden the applicability to include coating of plastic parts. (Section 1)

Also in accord with EPA guidance, DEEP is proposing new requirements for addition to RCSA section 22a-174-20 to limit VOC emissions from pleasure craft coating. Owners of marinas and boat yards that coat pleasure craft will be required to meet the VOC content limits for coatings and keep records of coatings and solvents purchased. (Section 5)

The requirements for both miscellaneous parts coating and pleasure craft coating include VOC content limits for coatings applied; work practices that limit evaporation and waste of coatings and solvents; coating application methods; and record keeping requirements.

Elements of the proposal aside from the parts and pleasure craft coating are minor revisions to address the interaction of the revised and new requirements with other subsections of RCSA section 22a-174-20. Such revisions are as follows:

- Removing redundant record keeping requirements for owners and operators of miscellaneous metal and plastic parts coating facilities (Section 2);
- Removing an artificial distinction between the use of permits and orders as the enforceable mechanisms for alternative emissions control scenarios for sources of volatile organic compound emissions (Section 3); and
- Making a minor clarification to the industrial solvent cleaning requirements of subsection (ii) of RCSA section 22a-174-20. (Section 4)

6087

CERTIFICATION

Be it known that the foregoing (check one) Regulations Emergency Regulations
are (check all that apply) Adopted Amended as hereinabove stated Repealed
by the aforesaid agency pursuant to section(s) 22a-174 of the *General Statutes* and/or Public
Act number(s) _____

(If applicable) after publication of notice of intent in the *Connecticut Law Journal* on September 27, 2011,

(If applicable) and the holding of an advertised public hearing on November 9, 2011;

WHEREFORE, the foregoing regulations are hereby (check all that apply)

Adopted Amended as hereinabove stated Repealed

EFFECTIVE: (check one, and complete as applicable)

When filed with the Secretary of the State

OR (insert date) _____

In Witness Whereof:	DATE <u>2/28/12</u>	SIGNED (Head of Board, Agency or Commission) <i>[Signature]</i>	OFFICIAL TITLE, DULY AUTHORIZED <u>Commissioner, DEEP</u>
---------------------	------------------------	--	--

APPROVED by the Attorney General as to legal sufficiency in accordance with CGS Section 4-169, as amended

DATE <u>3/15/12</u>	SIGNED (Attorney General or AG's designated representative) <i>[Signature]</i> Joseph Rubin	OFFICIAL TITLE, DULY AUTHORIZED ASSOC. ATTY. GENERAL
------------------------	--	--

Or DEEMED APPROVED by the Attorney General in accordance with CGS Section 4-169, as amended, due to failure to give notice to the agency of any legal insufficiency within thirty (30) days of the receipt of the proposed regulation.

DATE	SIGNED (Head of Board, Agency or Commission)	OFFICIAL TITLE, DULY AUTHORIZED
------	--	---------------------------------

(For Regulation Review Committee Use ONLY)

Approved Rejected without prejudice

Approved with technical corrections only Disapproved in part, (Indicate Section Numbers disapproved)

Deemed approved pursuant to CGS 4-170(c) as amended

By the Legislative Regulation Review Committee in accordance with CGS Section 4-170, as amended	DATE <u>7/24/2012</u>	SIGNED (Administrator, Legislative Regulation Review Committee) <i>[Signature]</i> Pamela B. Booth
---	--------------------------	---

Two certified copies received and filed and one such copy forwarded to the Commission on Official Legal Publications in accordance with CGS Section 4-172, as amended.

DATE	SIGNED (Secretary of the State)	BY
------	---------------------------------	----

INSTRUCTIONS

- All regulations proposed for adoption, amendment or repeal, except emergency regulations, must be presented to the Attorney General for his/her determination of legal sufficiency. (See CGS Section 4-169.)
- After approval by the Attorney General, original and eighteen (18) copies of all regulations proposed for adoption, amendment or repeal must be presented to the standing Legislative Regulation Review Committee for its action. (See CGS Section 4-170.)
- Each proposed regulation must be in the form intended for publication and each section must include the appropriate regulation section number and section heading. (See CGS Section 4-172.)
- New language added to an existing regulation must be in underlining or CAPITAL LETTERS, as determined by the Regulation Review Committee. (See CGS 4-170(c).)

6087

CERTIFICATION

1) I hereby certify that the above (check one) Regulations Emergency Regulations

2) are (check all that apply) adopted amended repealed by this agency pursuant to the following authority(ies): (complete all that apply)

a. Connecticut General Statutes section(s) 22a-174

b. Public Act Number(s) _____

(Provide public act number(s) if the act has not yet been codified in the Connecticut General Statutes.)

3) And I further certify that notice of intent to adopt, amend or repeal said regulations was published in the Connecticut Law Journal on 27 September 2011; (Insert date of notice publication if publication was required by CGS Section 4-168.)

4) And that a public hearing regarding the proposed regulations was held on 9 Nov. 2011; (insert date(s) of public hearing(s) held pursuant to CGS Section 4-168(a)(7), if any, or pursuant to other applicable statute.)

5) And that said regulations are EFFECTIVE (check one, and complete as applicable)

When filed with the Secretary of the State
OR on (insert date) _____

DATE <u>8/17/12</u>	SIGNED (Head of Board, Agency or Commission) <i>[Signature]</i>	OFFICIAL TITLE, DULY AUTHORIZED Commissioner
------------------------	--	---


APPROVED by the Attorney General as to legal sufficiency in accordance with CGS Section 4-169, as amended

DATE <u>9/13/12</u>	SIGNED (Attorney General or AG's designated representative) <i>[Signature]</i>	OFFICIAL TITLE, DULY AUTHORIZED Joseph Rubin Assoc. Atty Gen'l
------------------------	---	---

Proposed regulations are DEEMED APPROVED by the Attorney General in accordance with CGS Section 4-169, as amended, if the Attorney General fails to give notice to the agency of any legal insufficiency within thirty (30) days of the receipt of the proposed regulation

(For Regulation Review Committee Use ONLY)

- Approved
- Rejected without prejudice
- Approved with technical corrections
- Disapproved in part (Indicate Section Number disapproved only)
- Deemed approved pursuant to CGS 4-170(c) as amended

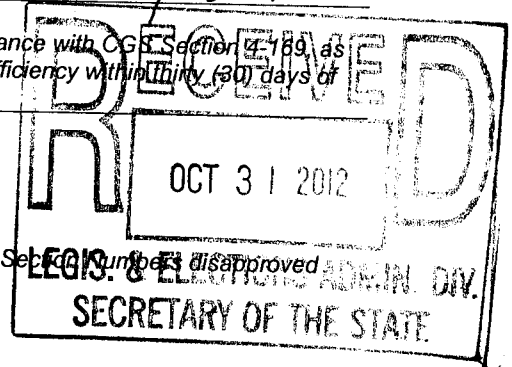

By the Legislative Regulation Review Committee in accordance with CGS Section 4-170, as amended	DATE <u>10/23/2012</u>	SIGNED (Administrator, Legislative Regulation Review Committee) <i>[Signature]</i>
---	---------------------------	---

Two certified copies received and filed and one such copy forwarded to the Commission on Official Legal Publications in accordance with CGS Section 4-172, as amended.

DATE <u>10-31-2012</u>	SIGNED (Secretary of the State) <i>[Signature]</i>	BY <i>[Signature]</i>
---------------------------	---	--------------------------

(For Secretary of State Use ONLY)

Regulations
of the

Department of Energy and Environmental Protection

CONCERNING

Amendment of Section 22a-174-20 of the Regulations
of Connecticut State Agencies: Control of Organic
Compound Emissions

Approved by the Attorney General
September 13, 2012

Approved by the Legislative Regulation Review Committee
on

October 23, 2012

Received and filed in the Office of the
Secretary of the State

October 31, 2012

Effective Date: October 31, 2012

Published in the Connecticut Law Journal