

Vertically Polarized, Log Periodic 63° / 18.5 dBi

LPA-185063/12CF

When ordering replace "___" with connector type.

Mechanical specifications

Length	1806 mm	71.1 in
Width	167 mm	6.6 in
Depth	148 mm	5.8 in
Depth with t-bracket	176 mm	6.9 in
4) Weight	6.1 kg	13.5 lbs
Wind Area		
Fore/Aft	0.30 m ²	3.3 ft ²
Side	0.27 m ²	2.9 ft ²
Rated Wind Velocity (Safety factor 2.0)	>224 km/hr >139 mph	
Wind Load @ 100 mph (161 km/hr)		
Fore/Aft	479 N	107.6 lbs
Side	434 N	97.6 lbs

Antenna consisting of aluminum alloy with brass feedlines covered by a UV safe fiberglass radome.

Mounting and Downtilting

Mounting brackets attach to a pipe diameter of Ø50-102 mm (2.0-4.0 in).

Mounting bracket kit #26799997
Downtilt bracket kit #26799999

The downtilt bracket kit includes the mounting bracket kit.

Electrical specifications

Frequency Range	1850-1990 MHz
Impedance	50Ω
3) Connector(s)	NE or E-DIN 1 port / center
1) VSWR	≤ 1.4:1
Polarization	Vertical
1) Gain	18.5 dBi
2) Power Rating	250 W
1) Half Power Angle	
H-Plane	63°
E-Plane	5°
1) Electrical Downtilt	0°
1) Null Fill	10%
Lightning Protection	Direct Ground

1) Typical values.

2) Power rating limited by connector only.


3) NE indicates an elongated N connector.

E-DIN indicates an elongated DIN connector.


4) The antenna weight listed above does not include the bracket weight.

Improvements to mechanical and/or electrical performance of the antenna may be made without notice.

Radiation pattern¹⁾

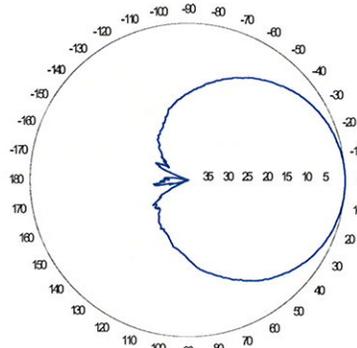


Horizontal

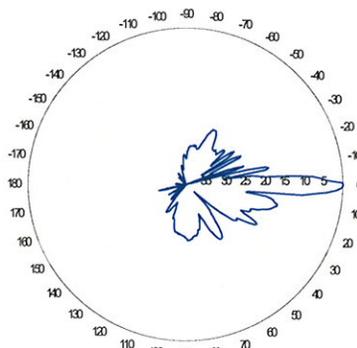

Vertical

Radiation patterns for all antennas are measured with the antenna mounted on a fiberglass pole.

Mounting on a metal pole will typically improve the Front-to-Back ratio.

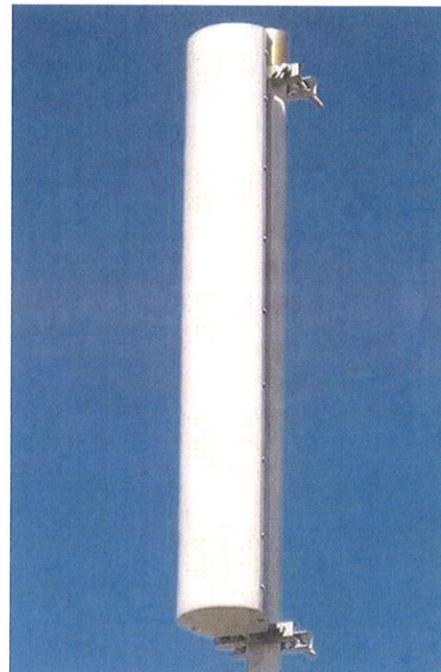

Amphenol Antel's Exclusive 3T (True Transmission Line Technology) Antenna Design:

- True log-periodic design allows for superior front-to-side characteristics to minimize sector overlap.
- Unique feedline design eliminates the need for conventional solder joints in the signal path.
- A non-collinear system with access to every radiating element for broad bandwidth and superior performance.
- Air as insulation for virtually no internal signal loss.

This Amphenol Antel antenna is under a five-year limited warranty for repair or replacement.

Antenna available with center-fed connector only.

CF Denotes a Center-Fed Connector.

1850-1990 MHz



Revision Date: 712/07


LPA-80080-8CF-EDIN-X

V-Pol | Log Periodic | 80° | 15.0 dBd

Replace "X" with desired electrical downtilt.

Antenna is also available with NE connector(s). Replace "EDIN" with "NE" in the model number when ordering.

Electrical Characteristics		
Frequency bands	806-960 MHz	
Polarization	Vertical	
Horizontal beamwidth	80°	
Vertical beamwidth	7°	
Gain	15.0 dBd (17.1 dBi)	
Electrical downtilt (X)	0, 2, 3, 4, 5, 6, 7	
Impedance	50Ω	
VSWR	≤1.4:1	
Upper sidelobe suppression (0°)	-23.4 dB	
Front-to-back ratio (+/-30°)	-42.6 dB	
Null fill	10% (-20.0 dB)	
Input power	500 W	
Lightning protection	Direct Ground	
Connector(s)	1 Port / EDIN or NE / Female / Center (Back)	
Mechanical Characteristics		
Dimensions Length x Width x Depth	2400 x 140 x 335 mm 94.5 x 5.5 x 10.9 in	
Depth of antenna with z-bracket	375 mm 14.8 in	
Weight without mounting brackets	10.9 kg 24.0 lbs	
Survival wind speed	> 201 km/hr > 125 mph	
Wind area	Front: 0.34 m ² Side: 0.81 m ² Front: 3.6 ft ² Side: 8.7 ft ²	
Wind load @ 161 km/hr (100 mph)	Front: 580 N Side: 1204 N Front: 130 lbf Side: 271 lbf	
Mounting Options		
Part Number	Fits Pipe Diameter	Weight
3-Point Mounting & Downtilt Bracket Kit (0-17°)	21700000 50-102 mm 2.0-4.0 in	11 kg 25 lbs
Lock-Down Brace	If the lock-down brace is used, the maximum diameter of the mounting pipe is 88.9 mm or 3.5 in.	

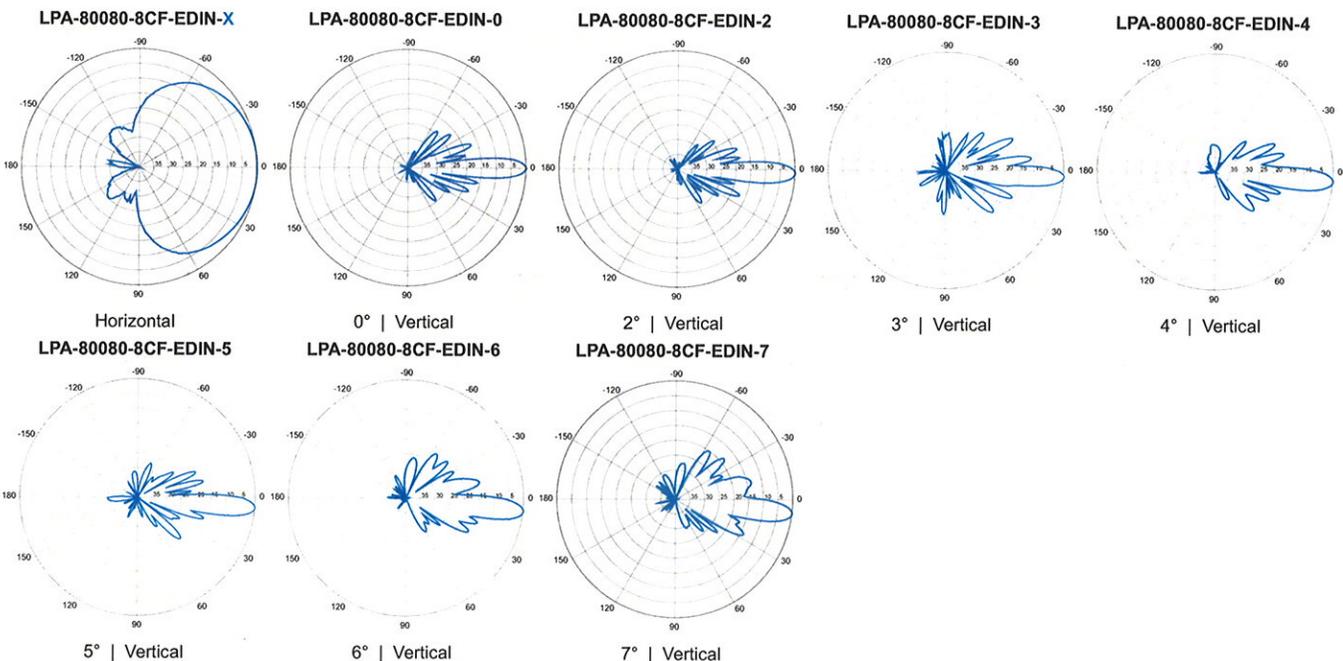

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

Mechanical specifications

Length	1800 mm	70.9 in
Width	140 mm	5.5 in
Depth	335 mm	13.2 in
Depth with z-bracket	375 mm	14.8 in
Weight ⁴⁾	9.5 kg	21.0 lbs
Wind Area Fore/Aft ⁶⁾	0.25 m ²	2.7 ft ²
Wind Area Side ⁶⁾	0.61 m ²	6.6 ft ²
Max Wind Survivability ⁶⁾	>201 km/hr	>125 mph
Wind Load @ 100 mph (161 km/hr) ⁶⁾		
Fore/Aft	415 N	93 lbf
Side	878 N	198 lbf

Antenna consisting of aluminum alloy with brass feedlines covered by a gray, UV safe fiberglass radome. RoHS compliant.

Mounting & Downtilting

Mounting hardware attaches to pipe diameter Ø50-102 mm; Ø2.0-4.0 in. If the lock-down brace is used, the maximum diameter is Ø88.9 mm (3.5 in).

Mechanical downtilt angle 0-22°
Mounting & Downtilt Bracket Kit 21700000

Electrical specifications

Frequency Range	806-960 MHz
Impedance	50Ω
Connector ³⁾	NE or E-DIN Female 1 port / Center
VSWR ¹⁾	≤ 1.4:1
Polarization	Vertical
Gain ¹⁾	14 dBd
Power Rating ²⁾	500 W
Half Power Angle ¹⁾	
Horizontal Beamwidth	80°
Vertical Beamwidth	10°
Electrical downtilt ⁵⁾	0°
Null fill ¹⁾	10%
Lightning protection	Direct ground

1) Typical values.

2) Power rating limited by connector only.

3) NE indicates an elongated N connector.
E-DIN indicates an elongated DIN connector.


4) Antenna weight does not include brackets.

5) Add'l downtilts may be available. Check website for details.


6) Values reflect installation with all three brackets utilized.

Improvements to mechanical and/or electrical performance of the antenna may be made without notice.

Radiation-pattern⁶⁾

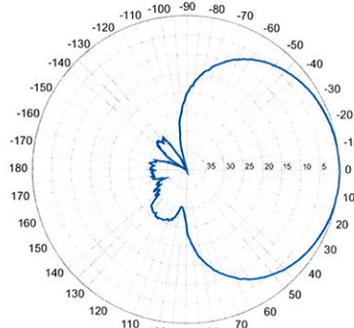

Horizontal

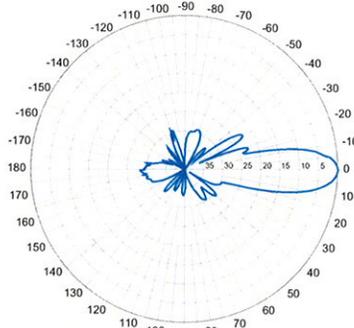


Vertical

Radiation patterns for all antennas are measured with the antenna mounted on a fiberglass pole.

Mounting on a metal pole will typically improve the front-to-back ratio.

LPA-80080/6CF

When ordering replace "___" with connector type.

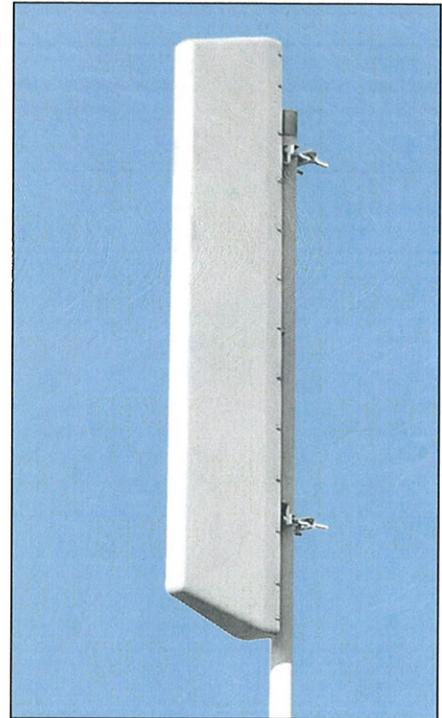

Featuring our Exclusive
3T Technology™
Antenna Design:

- True log-periodic design allows for superior front-to-side characteristics to minimize sector overlap.
- Unique feedline design eliminates the need for conventional solder joints in the signal path.
- A non-collinear system with access to every radiating element for broad bandwidth and superior performance.
- Air as insulation for virtually no internal signal loss.

Warranty:

This antenna is under a five-year limited warranty for repair or replacement.

Revision Date: 08/18/08

806-960 MHz


LPA-80063-8CF-EDIN-X

V-Pol | Log Periodic | 63° | 16.0 dBd

Replace "X" with desired electrical downtilt.

Antenna is also available with NE connector(s). Replace "EDIN" with "NE" in the model number when ordering.

Electrical Characteristics		
Frequency bands	806-960 MHz	
Polarization	Vertical	
Horizontal beamwidth	63°	
Vertical beamwidth	7°	
Gain	16.0 dBd (18.1 dBi)	
Electrical downtilt (X)	0, 2, 4, 5, 6, 7	
Impedance	50Ω	
VSWR	≤1.4:1	
Upper sidelobe suppression (0°)	-19.5 dB	
Null fill	5% (-26.02 dB)	
Input power	500 W	
Lightning protection	Direct Ground	
Connector(s)	1 Port / EDIN or NE / Female / Center (Back)	
Mechanical Characteristics		
Dimensions Length x Width x Depth	2405 x 385 x 332 mm 94.7 x 15.2 x 13.1 in	
Depth of antenna with z-bracket	372 mm 14.6 in	
Weight without mounting brackets	17.2 kg 38 lbs	
Survival wind speed	> 201 km/hr > 125 mph	
Wind area	Front: 0.93 m ² Side: 0.80 m ² Front: 10.0 ft ² Side: 8.6 ft ²	
Wind load @ 161 km/hr (100 mph)	Front: 1341 N Side: 1386 N Front: 302 lbf Side: 312 lbf	
Mounting Options		
Part Number	Fits Pipe Diameter	Weight
3-Point Mounting & Downtilt Bracket Kit (0-17°)	21700000	50-102 mm 2.0-4.0 in 11 kg 25 lbs
Lock-Down Brace	If the lock-down brace is used, the maximum diameter of the mounting pipe is 88.9 mm or 3.5 in.	

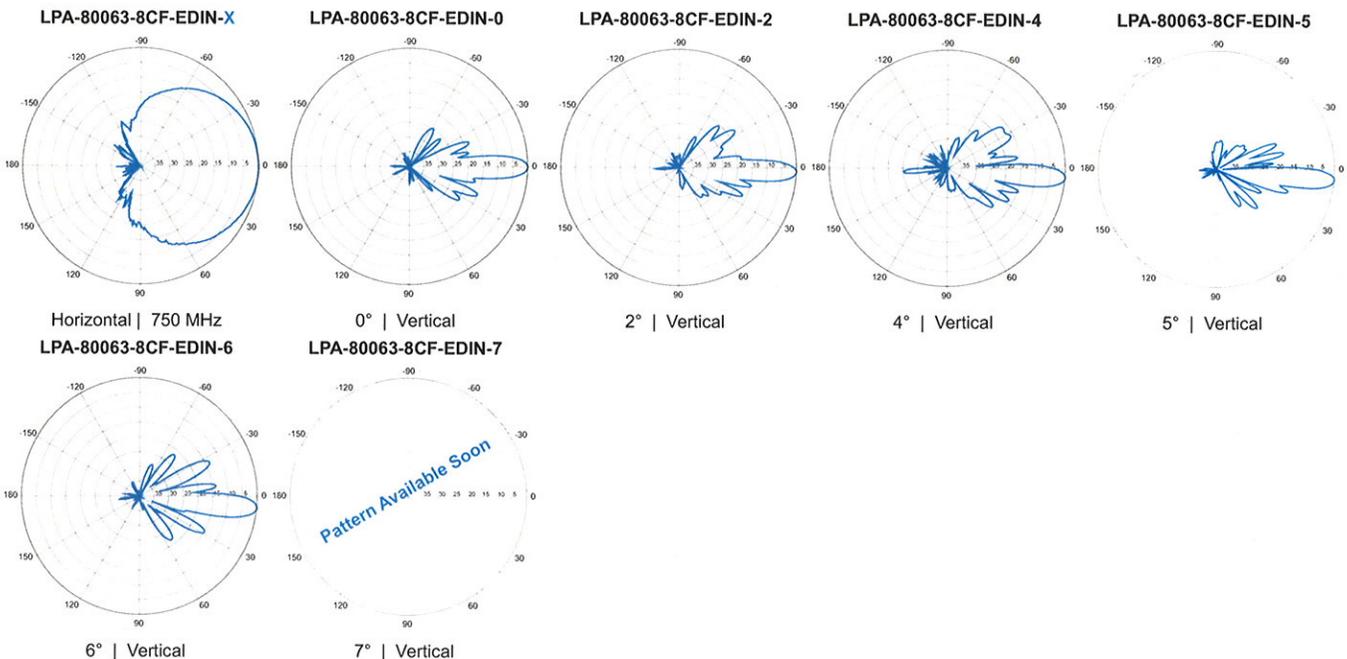

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

Mechanical specifications

Length	1804 mm	71.0 in
Width	285 mm	11.2 in
Depth	114 mm	4.5 in
Depth with z-bracket	154 mm	6.1 in
Weight ⁴⁾	7.9 kg	17.0 lbs
Wind Area Fore/Aft	0.51 m ²	5.5 ft ²
Wind Area Side	0.21 m ²	2.2 ft ²
Max Wind Survivability	>201 km/hr	>125 mph
Wind Load @ 100 mph (161 km/hr)		
Fore/Aft	753 N	169 lbf
Side	351 N	79 lbf

Antenna consisting of aluminum alloy with brass feedlines covered by a UV safe fiberglass radome.

Mounting & Downtilting

Mounting hardware attaches to pipe diameter $\varnothing 50$ -160 mm; $\varnothing 2.0$ -6.3 in

Mounting Bracket Kit	36210002
Downtilt Bracket Kit	36114003

Electrical specifications


Frequency Range	696-900 MHz
Impedance	50 Ω
Connector ³⁾	NE or E-DIN Female 2 ports / Center
VSWR ¹⁾	$\leq 1.35:1$
Polarization	Slant $\pm 45^\circ$
Isolation Between Ports ¹⁾	< -25 dB
Gain ¹⁾	14.5 dBd 16.5 dBi
Power Rating ²⁾	500 W
Half Power Angle ¹⁾	
Horizontal Beamwidth	63 $^\circ$
Vertical Beamwidth	11 $^\circ$
Electrical downtilt ⁵⁾	2 $^\circ$
Null fill ¹⁾	5%
Lightning protection	Direct ground

Patented Dipole Design: U.S. Patent No. 6,608,600 B2


- 1) Typical values.
- 2) Power rating limited by connector only.
- 3) NE indicates an elongated N connector.
E-DIN indicates an elongated DIN connector.
- 4) Antenna weight does not include brackets.
- 5) Add'l downtilts may be available. Check website for details.

Improvements to mechanical and/or electrical performance of the antenna may be made without notice.

Radiation-pattern¹⁾
750 MHz

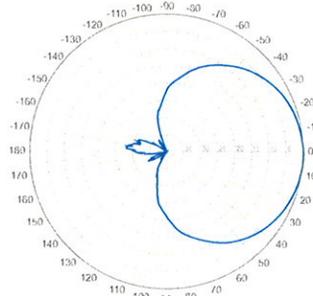


Horizontal

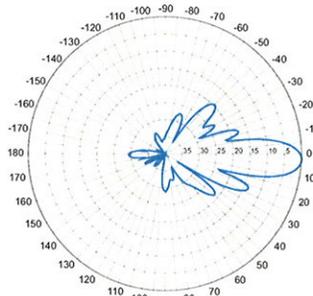


Vertical

850 MHz

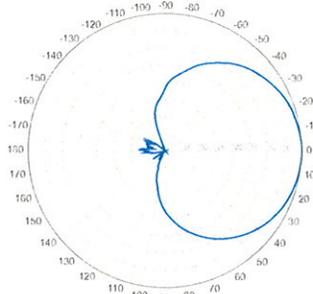

Horizontal

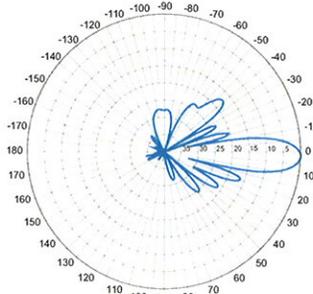


Vertical

696-900 MHz

BXA-70063/6CF __ 2 $^\circ$

When ordering replace " __ " with connector type.

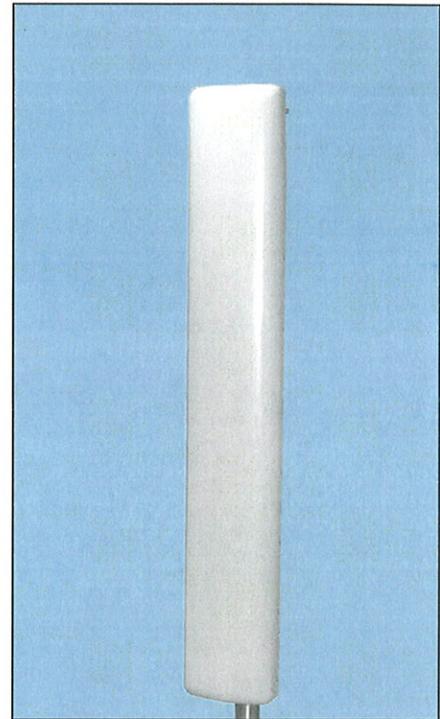

Featuring our Exclusive
3T Technology™
Antenna Design:

- Watercut brass feedline assembly for consistent performance.
- Unique feedline design eliminates the need for conventional solder joints in the signal path.
- A non-collinear system with access to every radiating element for broad bandwidth and superior performance.
- Air as insulation for virtually no internal signal loss.


Warranty:

This antenna is under a five-year limited warranty for repair or replacement.

Revision Date: 04/07/09

Lucent CDMA Modular Cell 4.0B Indoor

For CDMA Networks

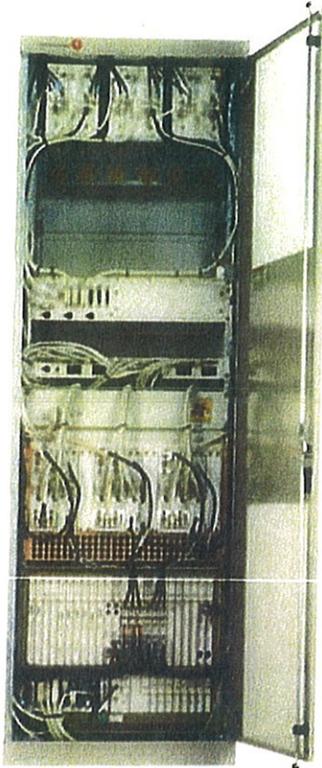

Lucent CDMA Modular Cell 4.0B is a high capacity base station equipped with the state-of-the-art technologies developed by Bell Labs. The product brings you outstanding carrier density and immediate OPEX savings. This indoor product can support up to 8 carriers/3 sectors per frame. It is twice the density of Modular Cell 4.0 (indoor). Modular Cell 4.0B offers full spectrum coverage in a single frame, dramatically simplifying growth patterns. As the leader in spread spectrum technology, Lucent Technologies continues to introduce innovations to the market: Multi-Carrier Radio (15MHz), Block Filters/Wideband Filters, and 40W Power Amplifier Modules are the latest assets integrated in the base station.

Features

The Modcell 4.0B indoor version offers a small footprint with exceptional carrier density in a standard ETSI cabinet.

- Indoor Single Frame Configuration
- 1-8 carriers per frame at 3 sectors (will support up to 11 carriers with Auxiliary Amplifier Frame)
- Dual Band: one cell to the ECP & mobile
- Close Loop Gain Control
- Timing and Controller Redundancy
- Integrated Power option
- Support CDMA2000™1X, and EV-DO Rev.0, with future support to EV-DO Rev. A
- IP Backhaul and Ethernet Backhaul capable
- 6-Sector option ready
- Intelligent Antenna option ready

Benefits

- Optimized for highest carrier density, smooth growth in one frame
- Conserves indoor footprint, reducing hardware and floor space requirements
- Minimizes configuration complexity
- Software-Only Carrier Add at certain carrier counts
- Flexible channel growth planning
- Designed to use existing power supply
- Grow CDMA carriers on only 2 antennas/sector
- Multi-Carrier Radio (15MHz), Block Filters/Wideband Filters, and 40W Power Amplifier Modules



Technical Specifications

Description	Specification
1. Configurations	
a. Sectors	3, 4 and 6
b. Carriers	1-8 per frame at 3 sectors (up to 11 with Auxiliary Amplifier Frame)
2. CDMA Channel Card Capacity	12 slots; CMU IVB capable
3. T1, E1 Facilities	Maximum of 20 per cabinet when equipped with URC-II's
4. User Alarms	7 Power Alarms, 25 User Alarms
5. GPS Antenna	Yes
6. Air Interface Standards	T1A/E1A 95-A plus TSB-74; T1A/E1A 95-B for 850 MHz; CDMA 2000
7. Frequency Bands	850MHz/1900 MHz; 300 to 2100 MHz capable
8. Vocoder	8 Kbps; 8 Kbps EVRC; 13 Kbps; SMV-ready
9. Environmental Cabinet Housing	Standard ETSI cabinet; UL50 compliant; zero rear clearance
10. Cabinet Access	Front Access
11. Operating Temperature Range	Range: -5 to +40°C (continuous)
12. Dimensions	600 mm W x 600 mm D x 1880 mm H (23.6 x 23.6 x 74) inches
13. Estimated Installed Weight	365 kg (785 lbs.) DC [8 carriers in one cabinet]
14. Power Options	Integrated Power, AC 120/240 Volt Input, -48V or +24 V DC Conversion Non-integrated Power requires either + 24 VDC Input or - 48 VDC Input
15. Power Consumption	
a. 3 Carrier/3 Sectors	2167 W
b. 6 Carrier/3 Sectors	5449 W
c. 11 Carrier/3 Sectors	10026 W
16. RF Power (at J4)	25 W per carrier (850) FCC Rated short-term average 20 W per carrier (850) FCC Rated long-term average 20 W per carrier (1900) FCC Rated short-term average 16 W per carrier (1900) FCC Rated long-term average
17. Minimal Antenna Configuration	2 antennas/sector
18. Filter	Block and Wide Band Dual Duplex
19. Growth Frame	PCS AUX Frame, Dual Band Growth Frame
20. Operational Accessories	Integrated Power
21. Channel Elements	Channel pooling across sectors or carriers

To learn more about our comprehensive portfolio, please contact your Lucent Technologies Sales Representative or visit our web site at <http://www.lucent.com>.

This document is for informational or planning purposes only, and is not intended to create, modify or supplement any Lucent Technologies specifications or warranties relating to these products or services. Information and/or technical specifications supplied within this document do not waive (directly or indirectly) any rights or licenses — including but not limited to patents or other protective rights — of Lucent Technologies or others. Specifications are subject to change without notice.

CDMA2000 is a trademark of the Telecommunication Industry Association

Copyright © 2006
Lucent Technologies Inc.
All rights reserved

MOB-Mod4B-i 0106




SD060

Liquid Cooled Diesel Engine Generator Sets

Standby Power Rating
60KW 60 Hz

Prime Power Rating
48KW 60 Hz

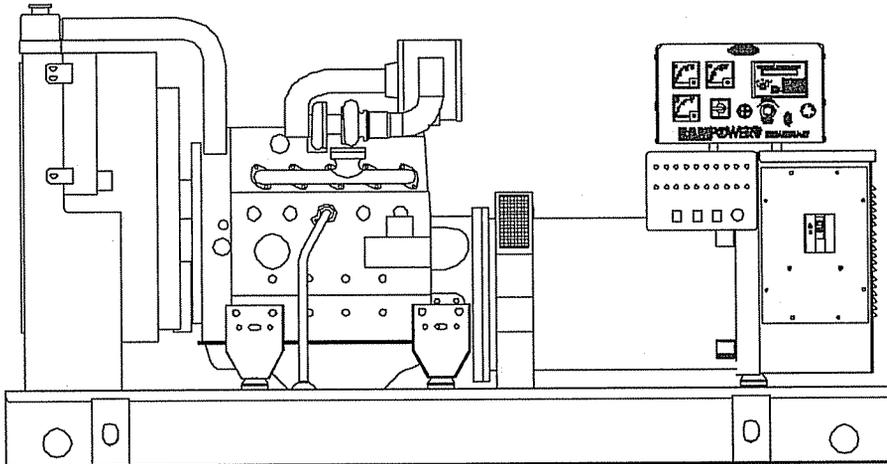

Power Matched
DEERE 3.0 DTA ENGINE
Turbocharged / Aftercooled

VERIZON WIRELESS
60 kW Diesel Models:
04812-3 120/240 1Ø Open Set
04813-3 120/208 1Ø Acoustic Enclosed
04864-3 120/208 3Ø Open Set
04865-3 120/208 3Ø Acoustic Enclosed

FEATURES

- **INNOVATIVE DESIGN & PROTOTYPE TESTING** are key components of GENERAC'S success in "IMPROVING POWER BY DESIGN." But it doesn't stop there. Total commitment to component testing, reliability testing, environmental testing, destruction and life testing, plus testing to applicable CSA, NEMA, EGSA, and other standards, allows you to choose GENERAC POWER SYSTEMS with the confidence that these systems will provide superior performance.
- **TEST CRITERIA:**
 - ✓ PROTOTYPE TESTED
 - ✓ SYSTEM TORSIONAL TESTED
 - ✓ ELECTRO-MAGNETIC INTERFERENCE
 - ✓ NEMA MG1-22 EVALUATION
 - ✓ MOTOR STARTING ABILITY
 - ✓ SHORT CIRCUIT TESTING
 - ✓ UL 2200
- **SOLID-STATE, FREQUENCY COMPENSATED VOLTAGE REGULATION.** This state-of-the-art power maximizing regulation system is standard on all Generac models. It provides optimized
- FAST RESPONSE to changing load conditions and MAXIMUM MOTOR STARTING CAPABILITY by electronically torque-matching the surge loads to the engine.
- **SINGLE SOURCE SERVICE RESPONSE** from Generac's dealer network provides parts and service know-how for the entire unit, from the engine to the smallest electronic component. You are never on your own when you own a GENERAC POWER SYSTEM.
- **ECONOMICAL DIESEL POWER.** Low cost operation due to modern diesel engine technology. Better fuel utilization plus lower cost per gallon provide real savings.
- **LONGER ENGINE LIFE.** Generac heavy-duty diesels provide long and reliable operating life.
- **GENERAC TRANSFER SWITCHES, SWITCHGEAR AND ACCESSORIES.** Long life and reliability is synonymous with GENERAC POWER SYSTEMS. One reason for this confidence is that the GENERAC product line includes its own transfer systems, accessories, switchgear and controls for total system compatibility.

GENERAC®
POWER SYSTEMS, INC.

APPLICATION & ENGINEERING DATA

SD060

GENERATOR SPECIFICATIONS

TYPE	Four-pole, revolving field
ROTOR INSULATION	Class H
STATOR INSULATION	Class H
TOTAL HARMONIC DISTORTION	<3%
TELEPHONE INTERFERENCE FACTOR (TIF)	<50
ALTERNATOR	Self-ventilated and drip-proof
BEARINGS (PRE-LUBED & SEALED)	1
COUPLING	Direct, Flexible Disc
LOAD CAPACITY (STANDBY)	100%
LOAD CAPACITY (PRIME)	110%

NOTE: Emergency loading in compliance with NFPA 99, NFPA 110, paragraph 5-13.2.6. Generator rating and performance in accordance with ISO8528-5, BS5514, SAE J1349, ISO3046 and DIN6271 standards.

EXCITATION SYSTEM

- BRUSHLESS
- Magnetically coupled DC current ✓
 - Eight-pole exciter w/ battery-driven field boost ✓
 - Mounted outboard of main bearing ✓
- PERMANENT MAGNET EXCITER
- Eighteen pole exciter ✓
 - Magnetically coupled DC current ✓
 - Mounted outboard of main bearing ✓
- REGULATION
- Solid-state ✓
 - ±1% regulation ✓

GENERATOR FEATURES

- Four pole, revolving field generator, directly connected to the engine shaft through a heavy-duty, flexible disc for permanent alignment.
- Generator meets the temperature rise standards for class "F" insulation as defined by NEMA MG1-32.6, while the insulation system meets the requirements for the higher class "H" rating.
- All prototype models have passed a three-phase symmetrical short circuit test to assure system protection and reliability.
- All prototype models are tested for motor starting ability by measuring the instantaneous voltage dip with a waveform data acquisition system.
- All models utilize an advanced wire harness design for reliable interconnection within the circuitry.
- Magnetic circuit, including amortisseur windings, tooth and skewed stator design, provides a minimal level of waveform distortion and an electromagnetic interference level which meets accepted requirements for standard AM radio, TV, and marine radio telephone applications.
- Voltage waveform deviation, total harmonic content of the AC waveform, and T.I.F. (Telephone Influence Factor) have been evaluated to acceptable standards in accordance with NEMA MG1-32.
- Alternator is self-ventilated and drip-proof constructed.
- Fully life-tested protective systems, including "field circuit and thermal overload protection" and optional main-line circuit breakers capable of handling full output capacity.
- System Torsional acceptability confirmed during Prototype Testing.

ENGINE SPECIFICATIONS

MAKE	GENERAC/DEERE
MODEL	5030HF270
CYLINDERS	5
DISPLACEMENT	3.0 Liter (186 cu.in.)
BORE	108 mm (4.25 in.)
STROKE	130 mm (5.12 in.)
COMPRESSION RATIO	18:1
INTAKE AIR	Turbocharged/Aftercooled
NUMBER OF MAIN BEARINGS	5
CONNECTING RODS	5-Drop Forged Steel
CYLINDER HEAD	Cast Iron
PISTONS	5-Aluminum Alloy
CRANKSHAFT	Die Forged, Induction Hardened Steel

VALVE TRAIN

LIFTER TYPE	Solid
INTAKE VALVE MATERIAL	Heat Resistant Steel
EXHAUST VALVE MATERIAL	Heat Resistant Steel
HARDENED VALVE SEATS	Replaceable

ENGINE GOVERNOR

- ELECTRONIC
- Standard
 - FREQUENCY REGULATION, NO-LOAD TO FULL LOAD ... 0.5%
 - STEADY STATE REGULATION
 - ±0.33%

LUBRICATION SYSTEM

TYPE OF OIL PUMP	Gear
OIL FILTER	Full flow, Cartridge
CRANKCASE CAPACITY	11 Liters (11.7 qts.)

COOLING SYSTEM

TYPE OF SYSTEM	Pressurized, Closed Recovery
WATER PUMP	Pre-Lubed, Self-Sealing
TYPE OF FAN	Pusher
NUMBER OF FAN BLADES	6
DIAMETER OF FAN	560 mm (22 in.)
COOLANT HEATER	120V, 1800 W

FUEL SYSTEM

FUEL	#2D Fuel (Min Cetane #40)
	(Fuel should conform to ASTM Spec.)
FUEL FILTER	5 Micron
FUEL INJECTION PUMP	Bosch, Unit type cam driven
FUEL PUMP	Mechanical
INJECTORS	Multi-Hole, Nozzle Type
ENGINE TYPE	Direct Injection
FUEL LINE (Supply)	6.35 mm (0.25 in.)
FUEL RETURN LINE	6.35 mm (0.25 in.)

ELECTRICAL SYSTEM

BATTERY CHARGE ALTERNATOR	20 Amps at 12 V
STARTER MOTOR	12 V
RECOMMENDED BATTERY	12 Volt, 90 A.H., 27F
GROUND POLARITY	Negative

Rating definitions - Standby: Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. (All ratings in accordance with BS5514, ISO3046 and DIN6271). Prime (Unlimited Running Time): Applicable for supplying electric power in lieu of commercially purchased power. Prime power is the maximum power available at variable load. A 10% overload capacity is available for 1 hour in 12 hours. (All ratings in accordance with BS5514, ISO3046, ISO8528 and DIN6271).

SD060

OPERATING DATA

	STANDBY		PRIME	
	SD060		SD060	
GENERATOR OUTPUT VOLTAGE/KW-60Hz	Rated AMP		Rated AMP	
120/240V, 1-phase, 1.0 pf	60	250	48	200
120/208V, 3-phase, 0.8 pf	60	208	48	166
NOTE: Consult your Generac dealer for additional voltages.				
MOTOR STARTING KVA	120/208/240V		120/208/240V	
Maximum at 35% instantaneous voltage dip with optional alternator; 60 Hz	164		164	
FUEL				
Fuel consumption—60 Hz				
Load	100%	80%	100%	80%
gal./hr.	4.8	3.8	4.1	3.3
liters/hr.	18.2	14.4	15.5	12.5
Fuel pump lift	36"		36"	
COOLING				
Coolant capacity	System - lit. (US gal.)	17.0 (4.5)	17.0 (4.5)	
	Engine - lit. (US gal.)	10.4 (2.75)	10.4 (2.75)	
Coolant flow/min.	60 Hz - lit. (US gal.)	106 (28)	106 (28)	
Heat rejection to coolant 60 Hz full load	BTU/hr.	120,500	96,500	
Inlet air to radiator	60 Hz - m ³ /min. (cfm)	212 (7,500)	212 (7,500)	
Max. air temperature to radiator	°C (°F)	60 (140)	60 (140)	
Max. ambient temperature	°C (°F)	48.9 (120)	48.9 (120)	
COMBUSTION AIR REQUIREMENTS				
Flow at rated power	60 Hz - cfm	209	168	
EXHAUST				
Exhaust flow at rated output	60 Hz - m ³ /min. (cfm)	18 (533)	15.3 (450)	
Max recommended back pressure	"Hg	1.5	1.5	
Exhaust temperature 60 Hz (full load)	°C (°F)	524 (975)	459 (858)	
Exhaust outlet size		3.0" O.D.	3.0" O.D.	
ENGINE				
Rated RPM	60 Hz	1800	1800	
HP at rated KW	60 Hz	96	80	
Piston speed	60 Hz - ft./min.	1230	1230	
BMEP	60 Hz - psi	227	189	
DERATION FACTORS				
Temperature				
	5% for every 10°C above - °C	25	25	
	2.77% for every 10°F above - °F	77	77	
Altitude				
	1.1% for every 100 m above - m	1067	1067	
	3.5% for every 1000 ft. above - ft.	3500	3500	

STANDARD ENGINE & SAFETY FEATURES

SD060


- High Coolant Temperature Automatic Shutdown
- Low Coolant Level Automatic Shutdown
- Low Oil Pressure Automatic Shutdown
- Overspeed Automatic Shutdown (Solid-state)
- Crank Limiter (Solid-state)
- Oil Drain Extension
- Radiator Drain Extension
- Factory-Installed Cool Flow Radiator
- Closed Coolant Recovery System
- UV/Ozone Resistant Hoses
- Rubber-Booted Engine Electrical Connections
- Secondary Fuel Filter
- Fuel Shutdown Solenoid
- Batteries 2 - 12 Volt 90 AH
- Stainless Steel Flexible Exhaust Connection
- Battery Charge Alternator
- Battery Cables
- Composite Battery Box
- Vibration Isolation of Unit to Mounting Base
- 24 Volt, Solenoid-Activated Starter Motor
- Air Cleaner
- Air Cleaner Service Indicator
- Fan Guard (CSA Compliant)
- CSA Guarding
- Critical Grade Muffler (Shipped Loose With Open Unit)
- High Temperature Exhaust Wrap
- Alternator Tropicalization
 - Resists Moisture, Fungus and Abrasives
 - In Addition to Standard Class H Epoxy Impregnation Coating
- Upsized Alternator For Increased Motor Starting
- Propylene Glycol 50/50 Mix Antifreeze
- Oil (19.0 Quarts)
- Coolant Expansion and Recovery Tank
- Extended Factory Test (2.5 Hr.)
 - Stepped Loads
 - Frame Temperature Test
- Specification Sheet Does Not Reflect Any Verizon Wireless Corporate Authorized Variances.
- "E" Control Console – Digital/Analog Hybrid
 - Communication Software for Remote Access
 - Analog Reading AC Volts
 - Analog Reading AC Amps
 - Analog Frequency
 - Emergency Stop Button

- Audible Alarm
- 11 Gauge Control Panel Enclosure
- Programmable Engine Control (See Bulletin #0161310SBY For Details)
- 20 Light Annunciator Generator Alarms
- 8 Form C Dry Contact Output Relays
- 120 Volt Coolant Heater 1800 Watt with 3 Wire Connection Cord
- Mainline Circuit Breaker
 - 200 Amp & 100 Amp – 120/240 Single Phase
 - 200 Amp & 50 Amp – 120/208 Three Phase
- Flexible Fuel Lines
- Fuel Pressure Loss Protection System
- UL2200 Listed
- Basetank
 - 48 Hr. Runtime at 100% Load
 - Double Wall
 - 125% Engine Fluid Containment and Alarms of all Generator Liquids
 - Fuel Level Sender and Visible Level Gauge
 - Rupture Basin Alarm
 - Emergency Vents
 - Check Valve (inlet and return)
 - FM Fusible Link (165°F) Shutoff
 - UL 142 Listed
 - Southern California limitation of 52 gallons
- Consult State and Local Codes for Specific Requirements in your area.
- Five Year Extended Warranty
- Enclosure Options
 - Open Generator Set w/ Duct Adapter
 - Weather Protective Sound Attenuated Enclosure w/ Enclosed Critical Grade Muffler and Flex Exhaust
- 24V Dual-Rate 10 Amp Battery Charger With 120V 3 Wire Connection Cord

Distributed by:

Design and specifications subject to change without notice. Dimensions shown are approximate. Contact your Generac dealer for certified drawings. DO NOT USE THESE DIMENSIONS FOR INSTALLATION PURPOSES.

See Installation Drawing # E3700 For Details

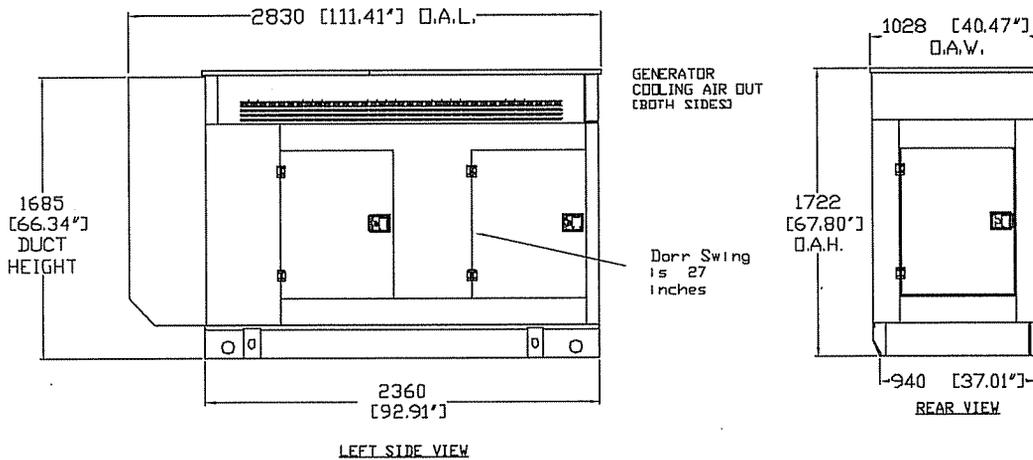

GENERAC POWER SYSTEMS, INC. • P.O. BOX 8 • WAUKESHA, WI 53187

262/544-4811 • FAX 262/544-4851

Site Search Summary
Relocation of Existing Woodstock Facility
Woodstock, Connecticut

Section 16-50j-74(j) of the Regulations of Connecticut State Agencies requires the submission of a statement that describes “the narrowing process by which other possible sites were considered and eliminated.” In accordance with this requirement, descriptions of the general site search process, the identification of the applicable search area and the alternative locations considered for development of the relocated Woodstock telecommunications facility (the “Woodstock Facility”) at 87 West Quasset Road in Woodstock (“Property”) are provided below.

Site Search Process

To initiate its site selection process in an area where wireless service problems have been identified, Cellco first establishes a “site search ring” or “site search area.” In any search ring or search area, Cellco seeks to avoid the unnecessary proliferation of towers and to reduce the potential adverse environmental effects of the cell site, while at the same time maximizing the quality of service provided from a particular facility. These objectives are achieved by initially locating existing towers and other sufficiently tall structures within and near the site search area. If any are found, they are evaluated to determine whether they are capable of supporting Cellco’s telecommunications equipment at a location and elevation that satisfies its technical requirements.

In this case, because Cellco already maintains a wireless facility at the Property, its initial site search efforts involved working with American Tower Corporation to have them rebuild the existing tower. These efforts were unsuccessful. Cellco then continued its site search efforts by investigating a number of publicly and privately owned parcels in southeast Woodstock. Cellco also approached the owner of the Property directly about locating a new (relocated) telecommunications facility elsewhere on the Property.

Cellco maintains two (2) telecommunications facilities within approximately four (4) miles of the proposed relocated Woodstock Facility. Neither of these existing facilities, however, can provide the service along Routes 171 and 169 and local roads, as well as agricultural, commercial and residential areas in southeast Woodstock. (See Attachment 7).

Existing Telecommunication Facilities Within Four Miles

	<u>Tower Owner</u> <u>(Cellco Site Name)</u>	<u>Facility</u> <u>Height and Type</u>	<u>Location</u>	<u>Cellco</u> <u>Antenna Height</u>
1.	SBA (Coatney Hill)	190’ Monopole	215 Coatney Hill Road Woodstock, CT	167’

<u>Tower Owner (Cellco Site Name)</u>	<u>Facility Height and Type</u>	<u>Location</u>	<u>Cellco Antenna Height</u>
2. SBA (Pomfret East)	170' Monopole	398 Pomfret Street Pomfret, CT	157'

If existing towers or structures are not available or technically feasible, other locations are investigated where the construction of a new tower, or in this case the rebuilding and relocation of an existing tower, is required to satisfy Cellco's service requirements. The list of available locations may be further reduced if, after preliminary negotiations, the property owners withdraw a site from further consideration. From among the remaining locations, the proposed sites are selected by eliminating those that have greater potential for adverse environmental effects and fewer benefits to the public (i.e., those requiring taller towers, possibly with lights; those with substantial adverse environmental impacts, or in densely populated residential areas; and those with limited ability to share space with other public or private telecommunications entities). It should be noted that in any given site search, the weight afforded to factors considered in the selection process will vary depending upon the availability and nature of sites within the search area.

Identification of the Woodstock Search Area

The relocated Woodstock Facility would allow Cellco to provide reliable PCS, cellular and LTE service to portions of Routes 171, 169 and local roads, as well as commercial and residential areas, in southeast Woodstock. Cellco's existing Woodstock Facility provides coverage to many of these areas today, but only at cellular frequencies.

Cellco issued its "Woodstock Facility Relocation" search area in March of 2009. (See attached Search Area Map). As a matter of practice, Cellco's initial site search effort focuses on municipal or other quasi-public properties that might be available and appropriate locations for a telecommunications facility. If no public properties are available, Cellco investigates private land within or near the designated search area.

Sites Investigated in the Woodstock Area

In addition to the existing telecommunications facilities listed above, Cellco identified and investigated five (5) additional sites in southeast Woodstock. These sites include:

1. Quasset Hill Farm – 87 Quasset Hill Road, Woodstock, CT.

Cellco has proposed the relocation of its existing Woodstock Facility to the central portion of this 29.5 acre parcel. Cellco can meet its service objectives in southeast Woodstock by installing a full array of cellular, PCS and LTE antennas at the 147-foot level on the proposed tower.

2. Young's Farm Silos – 210 Child Hill Road, Woodstock, CT.

Cellco explored the use of two existing silo structures at Young's Farm (70' and 90' structures). This parcel is located to the north of the proposed relocated Woodstock Facility. Cellco could not satisfy its coverage objectives in southeast Woodstock utilizing either existing silo.

3. Woodstock Town Hall – 425 Route 169, Woodstock, CT.


This is a 6.3 acre parcel located near the Woodstock Town Center. Given the parcel's location near a Town park, elementary school, historic structures and residential areas in the Town Center area, this site was rejected. The First Selectman also expressed a desire that Cellco pursue the West Quasset Road site.

4. First Congregational Church – 543 Route 169 Woodstock, CT.

The First Congregational Church building is on the National Register of Historic Places. Cellco considered use of the existing steeple but could not satisfy its Woodstock coverage objectives in the area.

5. Woodstock Volunteer Fire Department – 399 Route 169, Woodstock, CT.



This is a 2.1 acre parcel located south of Woodstock Town Hall. The Fire Department property is relatively small in size and, like the Town Hall parcel, is adjacent to a Town park and elementary school. The site was, therefore, rejected. The First Selectman also expressed a desire that Cellco pursue the West Quasset Road site.

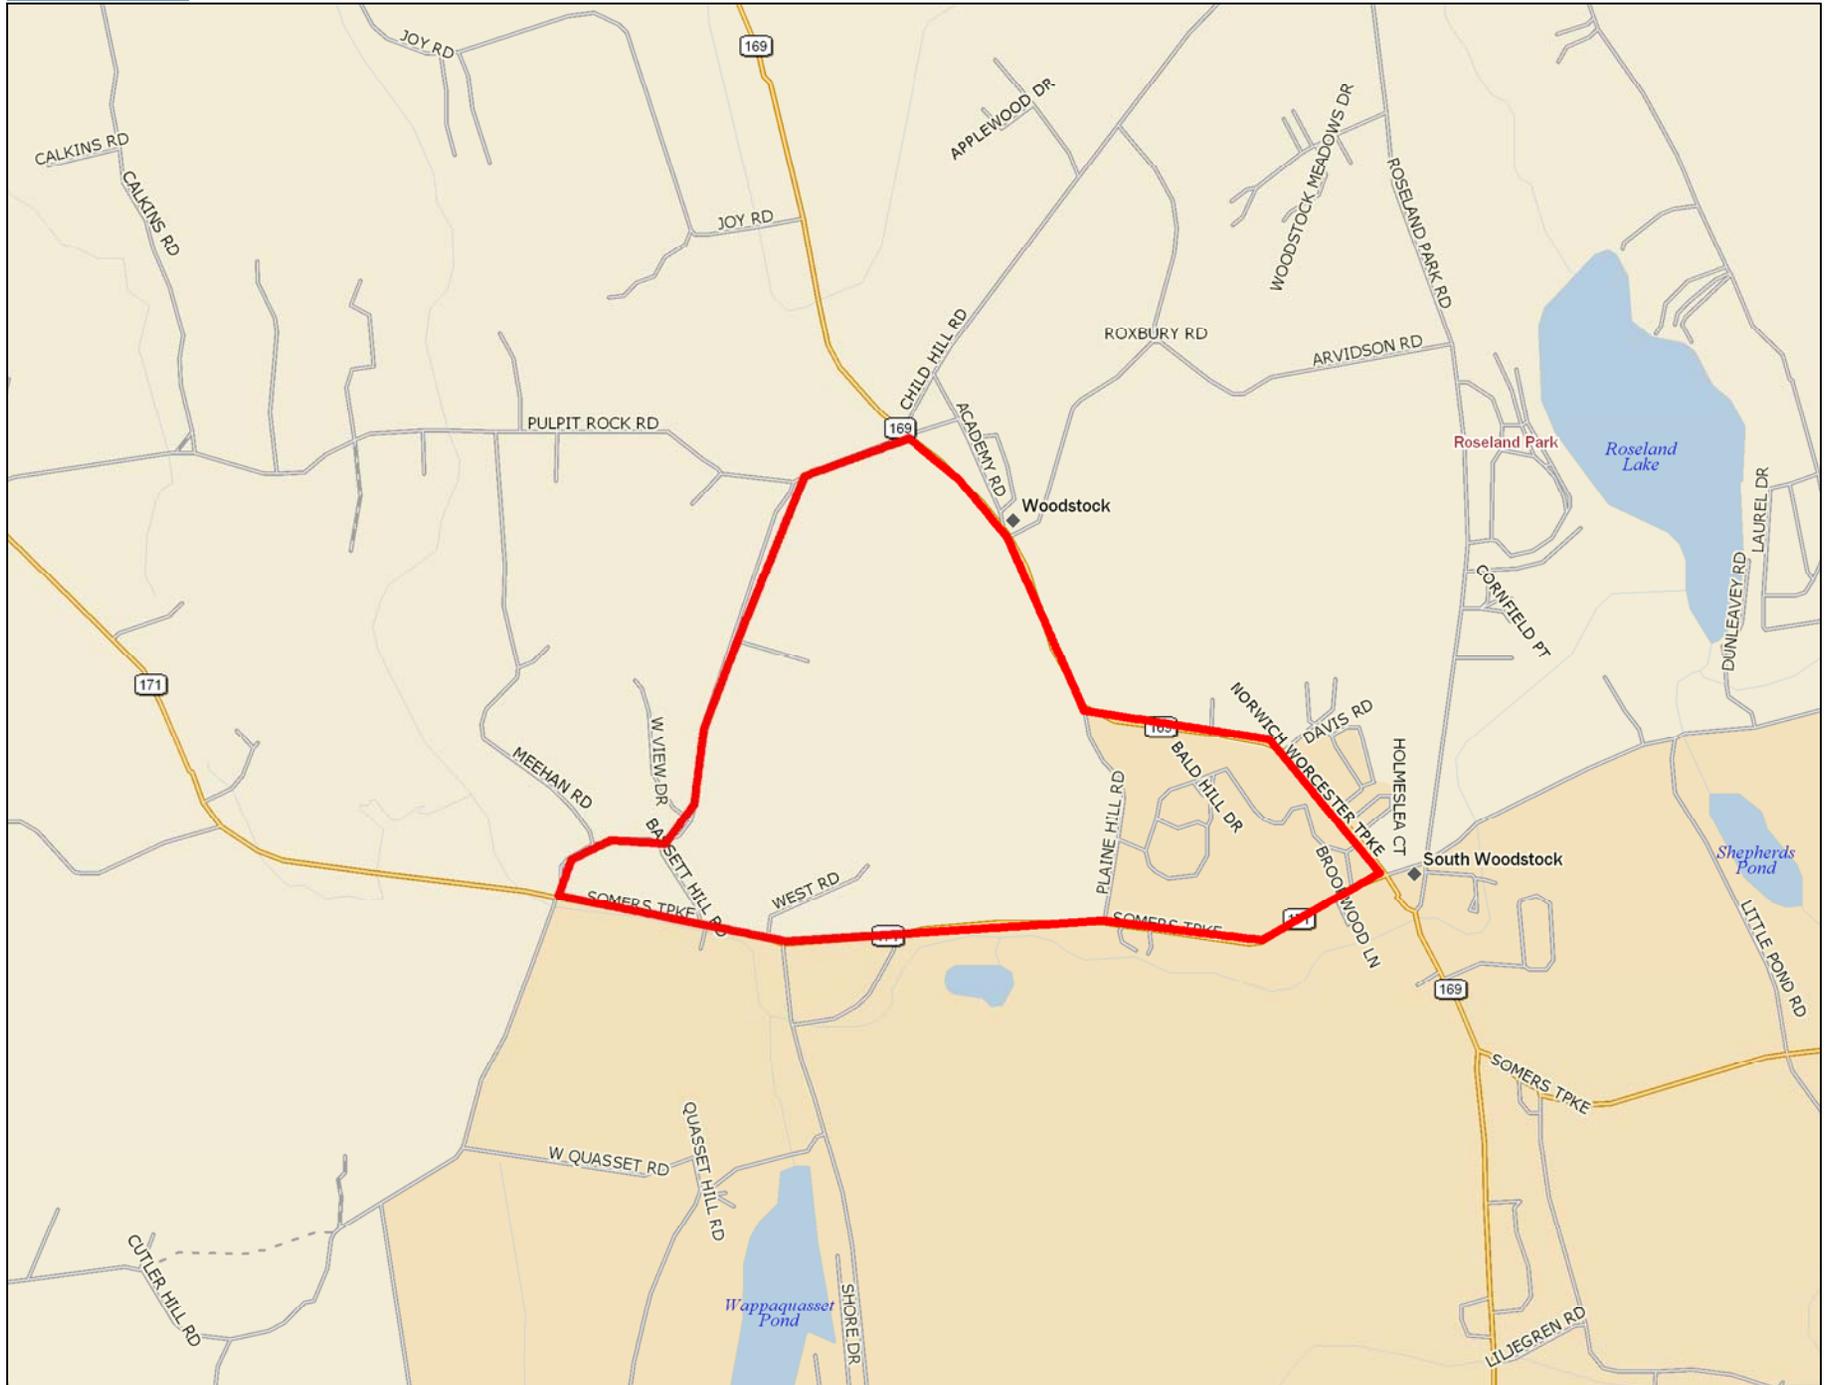


Data use subject to license.


© DeLorme. DeLorme Street Atlas USA® 2009.

www.delorme.com

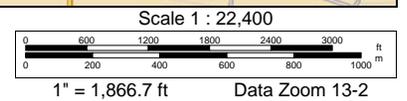

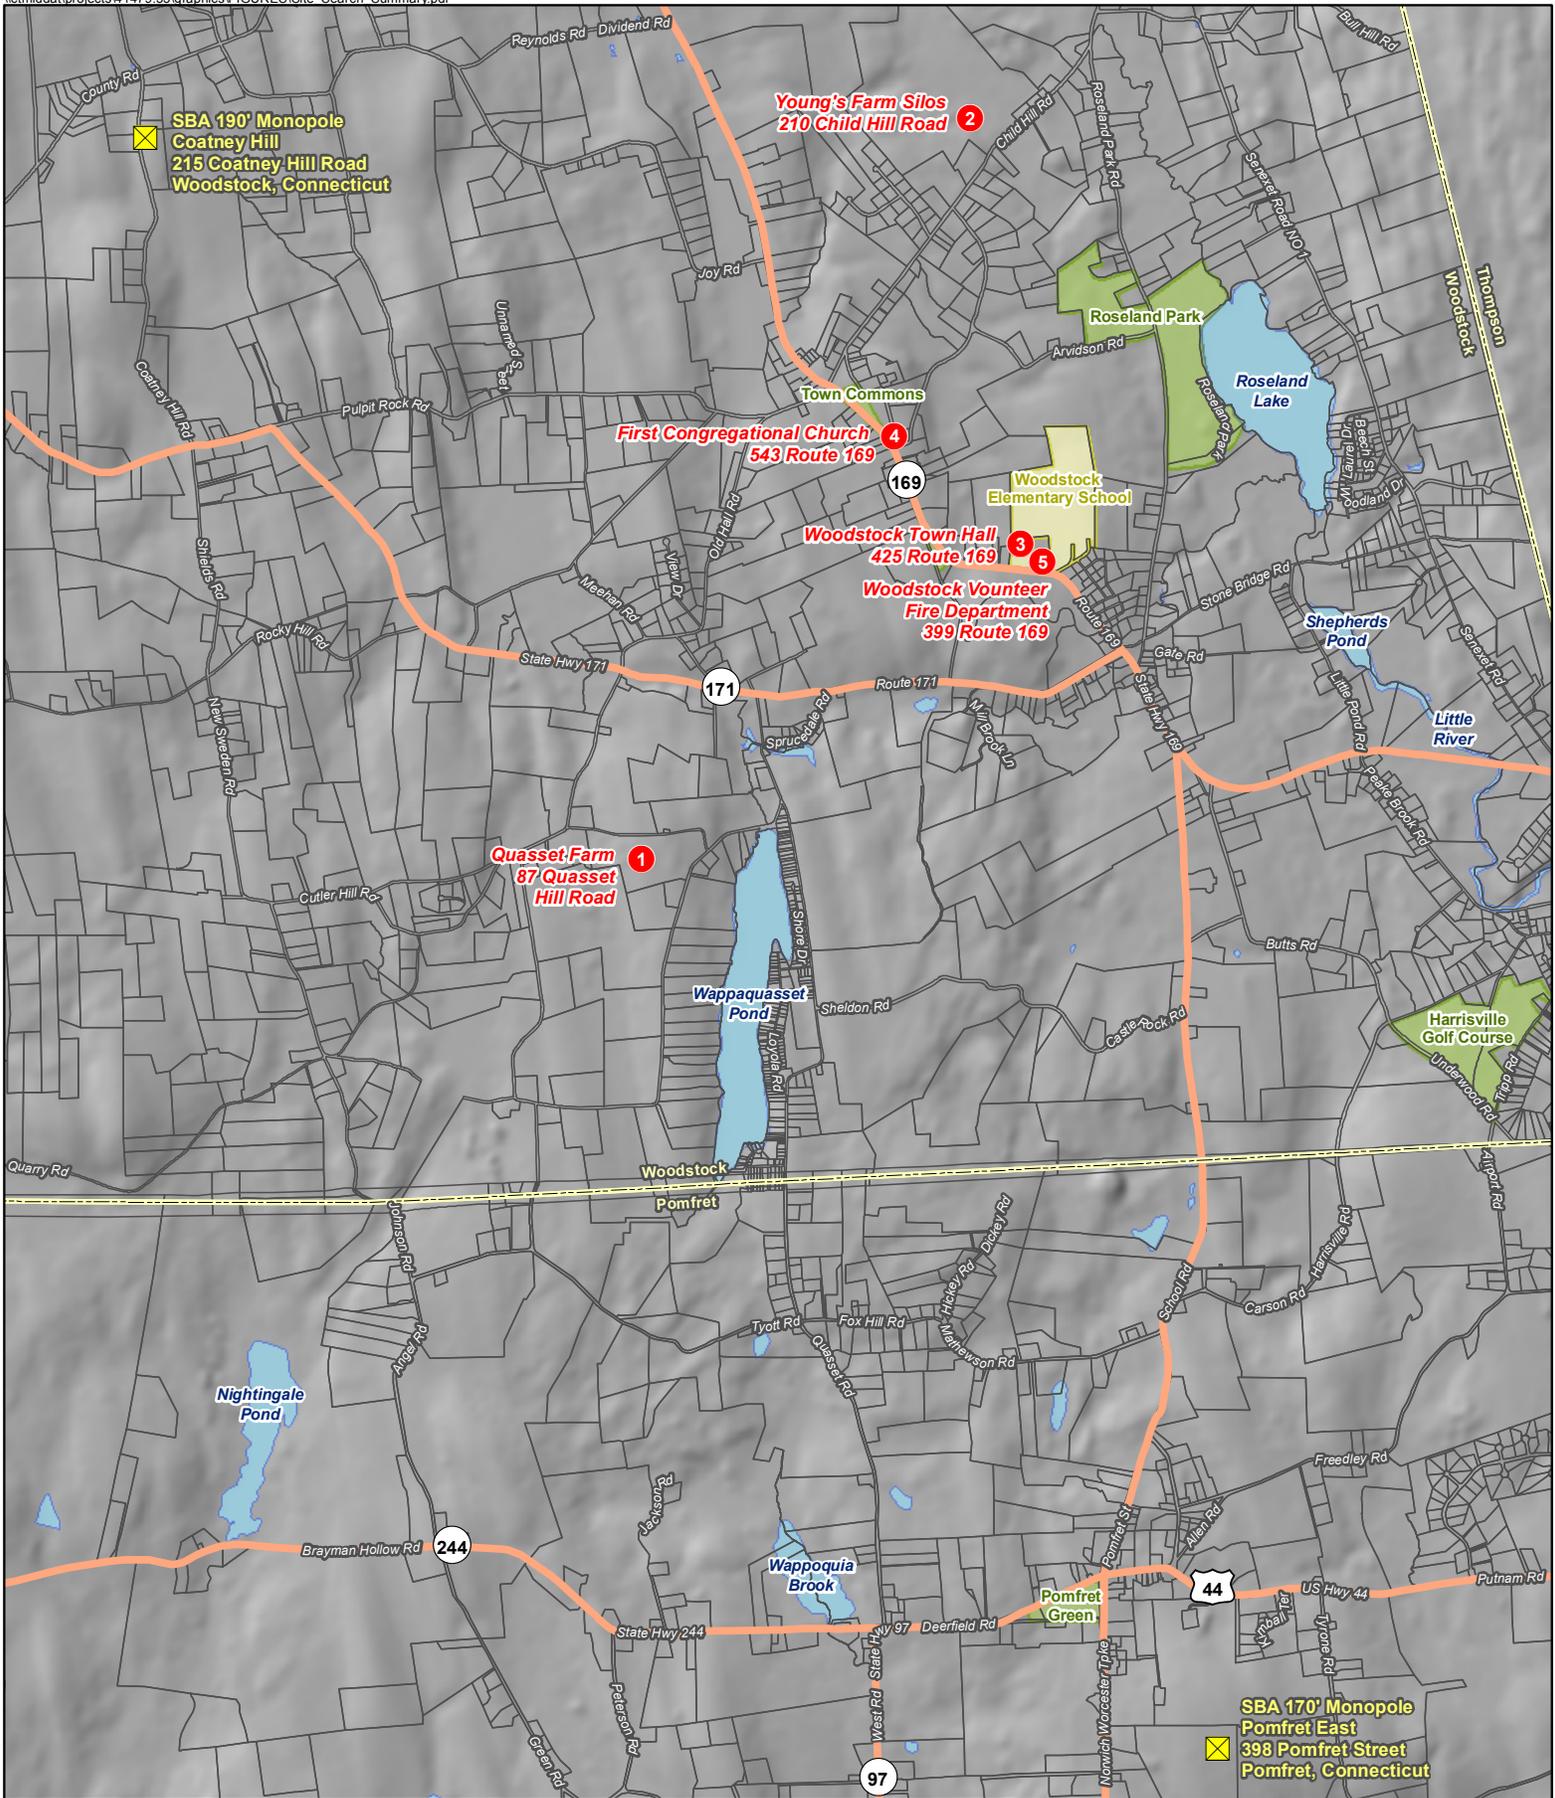

- Legend**
- 1 Potential Sites Investigated
 - X Existing Telecommunication Facility
 - ~ Open Water
 - Municipal and Private Open Space
 - School



Vanasse Hangen Brustlin, Inc.

**Site Search Summary Map
Proposed Verizon Wireless
Telecommunications Facility
Woodstock, Connecticut**

