



April 23 2015

Members of the Siting Council  
Connecticut Siting Council  
Ten Franklin Square  
New Britain, CT 06051

RE: Notice of Exempt Modification  
39 Maennerchor Avenue, Taftville (Norwich), CT 06380  
N 41° 33' 33.98"  
W 72° 03' 01.00"  
T-Mobile Site #: CTNL100G\_L700

Members of the Siting Council:

On behalf of T-Mobile, SBA Communications is submitting an exempt modification application to the Connecticut Siting council for modification of existing equipment at a tower facility located at 39 Maennerchor Avenue, Taftville, CT 06380.

The 39 Maennerchor Avenue, Taftville, CT facility consists of a 119' Monopole Tower owned and operated by SBA Towers II, LLC. In order to accommodate technological changes and enhance system performance in the State of Connecticut, T-Mobile plans to modify the equipment configurations at many of its existing cell sites. Please accept this letter and attachments as notification, pursuant to R.C.S.A. Section 16-50j-73, of construction which constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2). In compliance with R.C.S.A. Section 16-50j-73, a copy of this letter and attachments is being sent to the chief elected official of the municipality in which the affected cell site is located.

As part of T-Mobile's L700 project, T-Mobile desires to upgrade their equipment to meet the new standards of 4G technology. The new equipment will allow customers to download files and browse the internet at a high rate of speed while also allowing their phones to be compatible with the latest 4G technology.

Attached is a summary of the planned modifications, including power density calculations reflecting the change in T-Mobile's operations at the site along with the required fee of \$625.

The changes to the facility do not constitute modifications as defined in Connecticut General Statutes ("C.G.S.") Section 16-50i(d) because the general physical characteristics of the facility will not be


significantly changed or altered. Rather, the planned changes to the facility fall squarely within those activities explicitly provided for in R.C.S.A. Section 16-50j-72(b)(2).

1. The overall height of the structure will be unaffected.
2. The proposed changes will not extend the site boundaries. There will be no effect on the site compound other than the new equipment cabinets.
3. The proposed changes will not increase the noise level at the existing facility by six decibels or more.
4. The changes in radio frequency power density will not increase the calculated "worst case" power density for the combined operations at the site to a level at or above the applicable standard for uncontrolled environments as calculated for a mixed frequency site.

For the foregoing reasons, SBA Communications on behalf of T-Mobile, respectfully submits that the proposed changes at the referenced site constitute exempt modifications under R.C.S.A. Section 16-50j-72(b)(2).

Please feel free to call me at 508.251.0720 x 3804 with any questions you may have concerning this matter.

Thank you,

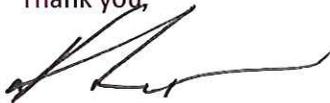

Kri Pelletier  
SBA Communications Corporation  
33 Boston Post Road West Suite 320  
Marlborough, MA 01752  
508-251-0720 x 3804 + T  
508-251-1755 + F  
203-446-7700 + C  
[kpelletier@sbsite.com](mailto:kpelletier@sbsite.com)



**T-Mobile  
Equipment Modification**

39 Maennerchor Avenue, Taftville, CT 06380  
Site number CTNL100G\_L700

**Tower Owner:** SBA Towers II, LLC

**Equipment Configuration:** Monopole

**Current and/or approved:**

- (3) 72"x13" Panel
- (18) 1-5/8" lines

**Planned Modifications:**

- (3) 72"x13" Panel
- (3) RFSAPXV18-206517S-C-A20
- (3) CommscopeLNX-6515DS
- (6) AllenTelecomFE15501P77/75
- (3) Kathrein78211056
- (18) 1-5/8" lines

**Structural Information:**

The attached structural analysis demonstrates that the tower and foundation will have adequate structural capacity to accommodate the proposed modifications.

**Power Density:**

The anticipated Maximum Composite contributions from the T-Mobile facility are 11.45% of the allowable FCC established general public limit. The anticipated composite MPE value for this site assuming all carriers present is 42.98% of the allowable FCC established general public limit sampled at the ground level.

Site Composite MPE%	
Carrier	MPE%
T-Mobile	11.45
MetroPCS	3.95 %
AT&T	13.17 %
Verizon Wireless	14.41 %
Site Total MPE %:	42.98 %

April 23, 2015

Mr. John Bilda  
Acting City Manager  
City of Norwich  
City Hall, Room 219  
100 Broadway  
Norwich, CT 06360-4431

RE: Telecommunications Facility @ 39 Maennerchor Avenue, Taftville, CT 06380

Dear Mr. Bilda ,

In order to accommodate technological changes and enhance system performance in the State of Connecticut, T-Mobile will be changing its equipment configuration at certain cell sites.

As required by Regulations of Connecticut State Agencies (R.C.S.A.) Section 16-50j-73, the Connecticut Siting Council has been notified of the changes and will review T-Mobile's proposal. Please accept this letter as notification under Section 16-50j-73 of construction which constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2).

The accompanying letter to the Siting Council fully describes T-Mobile's proposal for the above referenced cell site. However, if you have any questions or require any further information on our plans or the Siting Council's procedures, please call me at 508.251.0720 x 3804.

Thank you,



Kri Pelletier  
SBA Communications Company  
33 Boston Post Road West Suite 320  
Marlborough, MA 01752  
508-251-0720 x 3804 + T  
508-251-1755 + F  
203-446-7700 + C  
[kpelletier@sbsite.com](mailto:kpelletier@sbsite.com)

April 23, 2015

Maennerchor Club  
39 Maennerchor Ave.  
Taftville CT 06380

RE: Telecommunications Facility @ 39 Maennerchor Avenue, Taftville, CT 06380

To Whom It May Concern:

In order to accommodate technological changes and enhance system performance in the State of Connecticut, T-Mobile will be changing its equipment configuration at certain cell sites.

As required by Regulations of Connecticut State Agencies (R.C.S.A.) Section 16-50j-73, the Connecticut Siting Council has been notified of the changes and will review T-Mobile's proposal. Please accept this letter as notification under Section 16-50j-73 of construction which constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2).

The accompanying letter to the Siting Council fully describes T-Mobile's proposal for the above referenced cell site. However, if you have any questions or require any further information on our plans or the Siting Council's procedures, please call me at 508.251.0720 x 3804.

Thank you,



Kri Pelletier  
SBA Communications Company  
33 Boston Post Road West Suite 320  
Marlborough, MA 01752  
508-251-0720 x 3804 + T  
508-251-1755 + F  
203-446-7700 + C  
[kpelletier@sbsite.com](mailto:kpelletier@sbsite.com)

**Structural Analysis for  
SBA Network Services, Inc.**

**119' Monopole Tower**

**SBA Site Name: Norwich  
SBA Site ID: CT13556-S-01  
T-Mobile Site ID: CTNL100G**

FDH Project Number 15BKDX1400

**Analysis Results**

Tower Components	67.1 %	Sufficient
Foundation	77.0 %	Sufficient

Prepared By:




Antonio Fuentes, EI  
Project Engineer

Reviewed By:



Dennis D. Abel, PE  
Director of Structural Engineering  
CT PE License No. 23247

**Velocitel, Inc., d.b.a. FDH Velocitel**  
6521 Meridien Drive  
Raleigh, NC 27616  
(919) 755-1012  
[info@fdh-inc.com](mailto:info@fdh-inc.com)

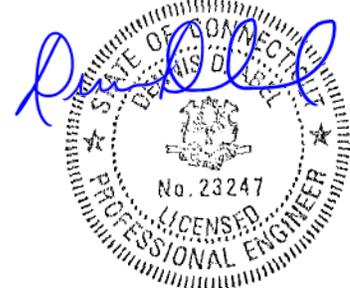

April 16, 2015

04-16-2015

**TABLE OF CONTENTS**

EXECUTIVE SUMMARY .....3

    Conclusions.....3

    Recommendations .....3

APPURTENANCE LISTING .....4

RESULTS .....5

GENERAL COMMENTS .....6

LIMITATIONS .....6

APPENDIX .....7

## EXECUTIVE SUMMARY

At the request of SBA Network Services, Inc., Velocitel, Inc., d.b.a. FDH Velocitel performed a structural analysis of the monopole located in Taftville, CT to determine whether the tower is structurally adequate to support both the existing and proposed loads pursuant to the *Steel Antenna Towers and Antenna Supporting Structures, TIA/EIA-222-F* and the *2005 Connecticut Building Code*. Information pertaining to the existing/proposed antenna loading, current tower geometry, geotechnical data, foundation dimensions, and member sizes was obtained from:

- Sabre Towers and Poles (Job No. 09-01086) Structural Design Report dated January 15, 2009
- Tower Engineering Professionals (Project No. 083184.01) Subsurface Exploration Report dated December 8, 2008
- FDH Engineering, Inc. (Project No. 12-05460E S4) Extension Drawings for a 118' Monopole dated February 25, 2013
- FDH Engineering, Inc. (Project No. 1301051700) Modification Inspection Report dated June 17, 2013
- FDH, Inc. (Job No. 1301051700) TIA Inspection Report dated June 4, 2013
- SBA Network Services, Inc.

The *basic design wind speed* per the *TIA/EIA-222-F* standards and the *2005 Connecticut Building Code* is 85 mph without ice and 38 mph with 3/4" radial ice. Ice is considered to increase in thickness with height.

## Conclusions

With the existing and proposed antennas from T-Mobile in place at 117 ft, the tower meets the requirements of the *TIA/EIA-222-F* standards and the *2005 Connecticut Building Code* provided the **Recommendations** listed below are satisfied. Furthermore, provided the foundation was designed and constructed to support the original design reactions (see Sabre Job No. 09-01086), the foundation should have the necessary capacity to support both the proposed and existing loading. For a more detailed description of the analysis of the tower, see the **Results** section of this report.

Our structural analysis has been performed assuming all information provided to Velocitel, Inc., d.b.a. FDH Velocitel is accurate (i.e., the steel data, tower layout, existing antenna loading, and proposed antenna loading) and that the tower has been properly erected and maintained per the original design drawings.

## Recommendations

To ensure the requirements of the *TIA/EIA-222-F* standards and the *2005 Connecticut Building Code* are met with the existing and proposed loading in place, we have the following recommendations:

1. The proposed feed lines should be installed inside of the pole's shaft.
2. The proposed TMAs should be installed directly behind the existing panel antennas.

**APPURTENANCE LISTING**

The proposed and existing antennas with their corresponding cables/coax lines are shown in **Table 1**. *If the actual layout determined in the field deviates from the layout Velocitel, Inc., d.b.a. FDH Velocitel should be contacted to perform a revised analysis.*

**Table 1 - Appurtenance Loading**

**Existing Loading:**

Antenna Elevation (ft)	Description	Feed Lines <sup>1</sup>	Carrier	Mount Elevation (ft)	Mount Type
128	(6) Andrew SBNH-1D6565C (3) KMW AM-X-CD-16-65-00T-RET (12) Ericsson RRUS-11 RRUs (3) Raycap DC6-48-60-18-8F Surge Arrestors	(6) 5/8" DC (2) 3/8" Fiber (3) 3/8" RET	New Cingular	128	(1) Low Profile Platform (Assumed CaAa = 20.81 ft <sup>2</sup> )
117	(3) 72" x 13" Panel	(18) 1-5/8"	T-Mobile	113.25	(1) Low Profile Platform
110.5	(6) Kathrein 742 351	(12) 7/8" (1) 3/8"	Metro PCS	108.3	(3) 13' T-Arms
100	(6) Antel BXA 70063 6CF 2 (6) Antel BXA 171063 12CF 2 (3) ALU RRH 2X40 AWS RRHs (3) ALU RRH 2X40 07-U RRHs (1) RFS DB-T1-6Z-8AB-0Z	(12) 1/2" (2) 1-5/8" Fiber	Verizon	100	(1) 12' Low Profile Platform (Assumed CaAa = 20.81 ft <sup>2</sup> )

<sup>1</sup>. Feed lines installed inside of pole's shaft unless noted otherwise.

**Proposed Carrier Final Loading:**

Antenna Elevation (ft)	Description	Feed Lines	Carrier	Mount Elevation (ft)	Mount Type
117	(3) 72" x 13" Panel (3) RFS APXV18-206517S-C-A20 (3) Commscope LNX-6515DS (6) Allen Telecom FE15501P77/75 (3) Kathrein 782 11056	(18) 1-5/8"	T-Mobile	113.25	(1) Low Profile Platform

## RESULTS

The following yield strength of steel for individual members was used for analysis:

**Table 2 - Material Strength**

Member Type	Yield Strength
Tower Shaft Sections	65 ksi & 42 ksi
Flange Plate	60 ksi
Flange Bolts	92 ksi
Base Plate	50 ksi
Anchor Bolts	75 ksi

**Table 3** displays the summary of the ratio (as a percentage) of force in the member to their capacities. Values greater than 100% indicate locations where the maximum force in the member exceeds its capacity. **Table 4** displays the maximum foundation reactions.

If the assumptions outlined in this report differ from actual field conditions, Velocitel, Inc., d.b.a. FDH Velocitel should be contacted to perform a revised analysis. Furthermore, as no information pertaining to the allowable twist and sway requirements for the existing or proposed appurtenances was provided, deflection and rotation were not taken into consideration when performing this analysis.

See the **Appendix** for detailed modeling information

**Table 3 - Summary of Working Percentage of Structural Components**

Section No.	Elevation ft	Component Type	Size	% Capacity*	Pass Fail
L1	128 - 118	Pole	P24x0.375	23.5	Pass
	118	Flange Bolts	(8) 1" Ø on 27.875" BC	29.9	Pass
	118	Flange Plate	PL 32.125" Ø x .75" Thk.	67.1	Pass
L3	118 - 96.75	Pole	TP31.05x24.93x0.1875	53.0	Pass
L4	96.75 - 47.25	Pole	TP44.93x29.523x0.3125	66.4	Pass
L5	47.25 - 0	Pole	TP57.91x42.6491x0.375	63.3	Pass
		Anchor Bolts	(16) 2.25" Ø on 64.5" BC	61.2	Pass
		Base Plate	PL 62.5" SQ x 3.25" Thk.	46.9	Pass

\* Capacities include 1/3 allowable stress increase for wind per TIA/EIA-222-F standards.

**Table 4 - Maximum Base Reactions**

Base Reactions	Current Analysis (TIA/EIA-222-F)	Original Design (ANSI/TIA-222-G)
Axial	32 k	49 k
Shear	27 k	49 k
Moment	2,607 k-ft	4570 k-ft

## **GENERAL COMMENTS**


This engineering analysis is based upon the theoretical capacity of the structure. It is not a condition assessment of the tower and its foundation. It is the responsibility of SBA Network Services, Inc. to verify that the tower modeled and analyzed is the correct structure (with accurate antenna loading information) modeled. If there are substantial modifications to be made or the assumptions made in this analysis are not accurate, Velocitel, Inc., d.b.a. FDH Velocitel should be notified immediately to perform a revised analysis.

## **LIMITATIONS**

All opinions and conclusions are considered accurate to a reasonable degree of engineering certainty based upon the evidence available at the time of this report. All opinions and conclusions are subject to revision based upon receipt of new or additional/updated information. All services are provided exercising a level of care and diligence equivalent to the standard and care of our profession. No other warranty or guarantee, expressed or implied, is offered. Our services are confidential in nature and we will not release this report to any other party without the client's consent. The use of this engineering work is limited to the express purpose for which it was commissioned and it may not be reused, copied, or distributed for any other purpose without the written consent of Velocitel, Inc., d.b.a. FDH Velocitel.

## APPENDIX

Section	1	2	3	4	5
Length (ft)	9.50	0.50	21.25	53.50	53.00
Number of Sides	1	1	18	18	18
Thickness (in)	0.2500	0.2500	0.1875	0.3125	0.3750
Socket Length (ft)			4.00	5.75	
Top Dia (in)	24.0000	24.0000	24.9300	29.5230	42.6491
Bot Dia (in)	24.0000	24.9300	31.0500	44.9300	57.9100
Grade	A572-42			A572-65	
Weight (K)	0.6	0.0	1.2	6.7	10.7

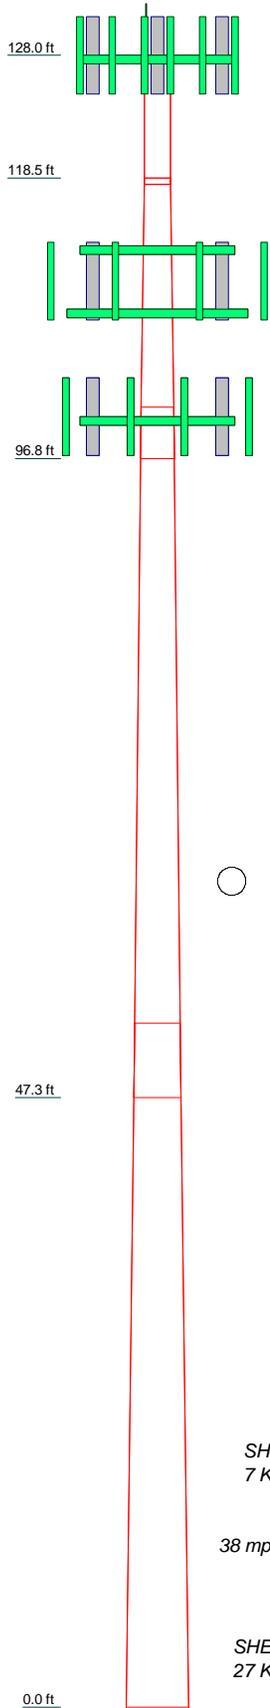

### DESIGNED APPURTENANCE LOADING


TYPE	ELEVATION	TYPE	ELEVATION
Lightning Rod	128	(2) FE15501P77/75	113.25
(2) SBNH-1D6565C w/ Mount Pipe	128	(2) FE15501P77/75	113.25
(2) SBNH-1D6565C w/ Mount Pipe	128	(2) FE15501P77/75	113.25
(2) SBNH-1D6565C w/ Mount Pipe	128	782 11056	113.25
AM-X-CD-16-65-00T-RET w/ Mount Pipe	128	782 11056	113.25
AM-X-CD-16-65-00T-RET w/ Mount Pipe	128	782 11056	113.25
AM-X-CD-16-65-00T-RET w/ Mount Pipe	128	13' Low Profile Platform	113.25
AM-X-CD-16-65-00T-RET w/ Mount Pipe	128	(2) 742 351 w/ Mount Pipe	108.3
(4) RRUS-11	128	(2) 742 351 w/ Mount Pipe	108.3
(4) RRUS-11	128	(2) 742 351 w/ Mount Pipe	108.3
(4) RRUS-11	128	(3) 13' T-Arms	108.3
DC6-48-60-18-8F Surge Arrestor	128	(2) BXA-70063-6CF-2 w/ Mount Pipe	100
DC6-48-60-18-8F Surge Arrestor	128	(2) BXA-70063-6CF-2 w/ Mount Pipe	100
DC6-48-60-18-8F Surge Arrestor	128	(2) BXA-171063-12CF-2 w/ Mount Pipe	100
Low Profile Platform	128	(2) BXA-171063-12CF-2 w/ Mount Pipe	100
72" x 13" Silent Panel	113.25	ALU RRH 2X40 AWS	100
72" x 13" Silent Panel	113.25	ALU RRH 2X40 AWS	100
72" x 13" Silent Panel	113.25	ALU RRH 2X40 AWS	100
APXV18-206517S-A20 w/Mount Pipe	113.25	ALU RRH 2X40 07-U	100
APXV18-206517S-A20 w/Mount Pipe	113.25	ALU RRH 2X40 07-U	100
APXV18-206517S-A20 w/Mount Pipe	113.25	ALU RRH 2X40 07-U	100
LNX-6515DS w/ Mount Pipe	113.25	ALU RRH 2X40 07-U	100
LNX-6515DS w/ Mount Pipe	113.25	DB-T1-6Z-8AB-0Z	100
LNX-6515DS w/ Mount Pipe	113.25	(1) Low Profile Platform	100

### MATERIAL STRENGTH

GRADE	Fy	Fu	GRADE	Fy	Fu
A572-42	42 ksi	60 ksi	A572-65	65 ksi	80 ksi

### TOWER DESIGN NOTES

1. Tower is located in New London County, Connecticut.
2. Tower designed for a 85 mph basic wind in accordance with the TIA/EIA-222-F Standard.
3. Tower is also designed for a 38 mph basic wind with 0.75 in ice. Ice is considered to increase in thickness with height.
4. Deflections are based upon a 50 mph wind.

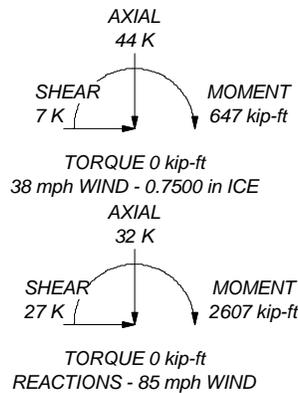

**FDH Engineering, Inc.**  
 6521 Meridien Drive, Suite 107  
 Raleigh, North Carolina 27616  
 Phone: 9197551012  
 FAX: 9197551031

Job: **Norwich, CT13556-S-05**

Project: **15BKDX1400**

Client: **SBA Network Services, Inc.** Drawn by: **AFuentes** App'd:

Code: **TIA/EIA-222-F** Date: **04/16/15** Scale: **NTS**

Path: **C:\Users\AFuentes\Desktop\CT13556-S-Norwich\15BKDX1400-STAMP\20-TMOR-8-Analytic\20-Report\Tower\Norwich\_CT13556-S.w** Dwg No. **E-1**

RADIO FREQUENCY EMISSIONS ANALYSIS REPORT  
EVALUATION OF HUMAN EXPOSURE POTENTIAL  
TO NON-IONIZING EMISSIONS

T-Mobile Existing Facility

Site ID: CTNL100G

Opta Maennerchor FT  
39 Maennerchor Avenue  
Norwich, CT 06380

**April 21, 2015**

**EBI Project Number: 6215002690**

Site Compliance Summary	
Compliance Status:	<b>COMPLIANT</b>
Site total MPE% of FCC general public allowable limit:	<b>42.98 %</b>

April 21, 2015

T-Mobile USA  
Attn: Jason Overbey, RF Manager  
35 Griffin Road South  
Bloomfield, CT 06002

Emissions Analysis for Site: **CTNL100G – Opta Maennerchor FT**

EBI Consulting was directed to analyze the proposed T-Mobile facility located at **39 Maennerchor Avenue, Norwich, CT**, for the purpose of determining whether the emissions from the Proposed T-Mobile Antenna Installation located on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01 and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter ( $\mu\text{W}/\text{cm}^2$ ). The number of  $\mu\text{W}/\text{cm}^2$  calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits, therefore it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) – (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

General population/uncontrolled exposure limits apply to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general public would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Public exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter ( $\mu\text{W}/\text{cm}^2$ ). The general population exposure limit for the 700 MHz Band is  $467 \mu\text{W}/\text{cm}^2$ , and the general population exposure limit for the PCS and AWS bands is  $1000 \mu\text{W}/\text{cm}^2$ . Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.

Occupational/controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

## **CALCULATIONS**

Calculations were done for the proposed T-Mobile Wireless antenna facility located at **39 Maennerchor Avenue, Norwich, CT**, using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. Since T-Mobile is proposing highly focused directional panel antennas, which project most of the emitted energy out toward the horizon, all calculations were performed assuming a lobe representing the maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was focused at the base of the tower. For this report the sample point is the top of a 6 foot person standing at the base of the tower.

For all calculations, all equipment was calculated using the following assumptions:

- 1) 2 GSM channels (PCS Band - 1900 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel
- 2) 2 UMTS channels (AWS Band – 2100 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel.
- 3) 2 LTE channels (AWS Band – 2100 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 60 Watts per Channel.
- 4) 1 LTE channel (700 MHz Band) was considered for each sector of the proposed installation. This channel has a transmit power of 30 Watts.
- 5) All radios at the proposed installation were considered to be running at full power and were uncombined in their RF transmissions paths per carrier prescribed configuration. Per FCC OET Bulletin No. 65 - Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. This is rarely the case, and if so, is never continuous.

- 6) For the following calculations the sample point was the top of a six foot person standing at the base of the tower. The maximum gain of the antenna per the antenna manufactures supplied specifications minus 10 dB was used in this direction. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 7) The antennas used in this modeling are the **RFS APXV18-206517S-C-A20** for 1900 MHz (PCS) and 2100 MHz (AWS) channels and the **Commscope LNX-6515DS-VTM** for 700 MHz channels. This is based on feedback from the carrier with regards to anticipated antenna selection. The **RFS APXV18-206517S-C-A20** has a maximum gain of **16.7 dBd** at its main lobe. The **Commscope LNX-6515DS-VTM** has a maximum gain of **14.6 dBd** at its main lobe. The maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was used for all calculations. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 8) The antenna mounting height centerline of the proposed antennas is **117 feet** above ground level (AGL).
- 9) Emissions values for additional carriers were taken from the Connecticut Siting Council active database. Values in this database are provided by the individual carriers themselves.

All calculations were done with respect to uncontrolled / general public threshold limits.

**T-Mobile Site Inventory and Power Data**

Sector:	A	Sector:	B	Sector:	C
Antenna #:	1	Antenna #:	1	Antenna #:	1
Make / Model:	RFS APXV18-206517S-C-A20	Make / Model:	RFS APXV18-206517S-C-A20	Make / Model:	RFS APXV18-206517S-C-A20
Gain:	16.7 dBd	Gain:	16.7 dBd	Gain:	16.7 dBd
Height (AGL):	117	Height (AGL):	117	Height (AGL):	117
Frequency Bands	1900 MHz(PCS) / 2100 MHz (AWS)	Frequency Bands	1900 MHz(PCS) / 2100 MHz (AWS)	Frequency Bands	1900 MHz(PCS) / 2100 MHz (AWS)
Channel Count	6	Channel Count	6	# PCS Channels:	6
Total TX Power:	240	Total TX Power:	240	# AWS Channels:	240
ERP (W):	11,225.64	ERP (W):	11,225.64	ERP (W):	11,225.64
Antenna A1 MPE%	3.28	Antenna B1 MPE%	3.28	Antenna C1 MPE%	3.28
Antenna #:	2	Antenna #:	2	Antenna #:	2
Make / Model:	Commscope LNX-6515DS-VTM	Make / Model:	Commscope LNX-6515DS-VTM	Make / Model:	Commscope LNX-6515DS-VTM
Gain:	14.6 dBd	Gain:	14.6 dBd	Gain:	14.6 dBd
Height (AGL):	117	Height (AGL):	117	Height (AGL):	117
Frequency Bands	700 MHz	Frequency Bands	700 MHz	Frequency Bands	700 MHz
Channel Count	1	Channel Count	1	Channel Count	1
Total TX Power:	30	Total TX Power:	30	Total TX Power:	30
ERP (W):	865.21	ERP (W):	865.21	ERP (W):	865.21
Antenna A2 MPE%	0.54	Antenna B2 MPE%	0.54	Antenna C2 MPE%	0.54

Site Composite MPE%	
Carrier	MPE%
T-Mobile	11.45
MetroPCS	3.95 %
AT&T	13.17 %
Verizon Wireless	14.41 %
<b>Site Total MPE %:</b>	<b>42.98 %</b>

T-Mobile Sector 1 Total:	3.82 %
T-Mobile Sector 2 Total:	3.82 %
T-Mobile Sector 3 Total:	3.82 %
<b>Site Total:</b>	<b>42.98 %</b>

## Summary

All calculations performed for this analysis yielded results that were **within** the allowable limits for general public exposure to RF Emissions.

The anticipated maximum composite contributions from the T-Mobile facility as well as the site composite emissions value with regards to compliance with FCC's allowable limits for general public exposure to RF Emissions are shown here:

T-Mobile Sector	Power Density Value (%)
Sector 1:	3.82 %
Sector 2:	3.82 %
Sector 3 :	3.82 %
T-Mobile Total:	11.45 %
Site Total:	42.98 %
Site Compliance Status:	<b>COMPLIANT</b>

The anticipated composite MPE value for this site assuming all carriers present is **42.98%** of the allowable FCC established general public limit sampled at the ground level. This is based upon values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.



**Scott Heffernan**  
RF Engineering Director

**EBI Consulting**  
21 B Street  
Burlington, MA 01803

**T-MOBILE  
NORTHEAST LLC**


35 GRIFFIN ROAD SOUTH  
BLOOMFIELD, CT 06002  
OFFICE: (860) 648-1116



SBA COMMUNICATIONS CORP.  
33 BOSTON POST ROAD WEST, SUITE 320 TEL: (508) 251-0720  
MARLBOROUGH, MA 01752 FAX: (508) 251-1755



1600 OSGOOD STREET  
BUILDING 20 NORTH, SUITE 3090 TEL: (978) 557-5553  
N. ANDOVER, MA 01845 FAX: (978) 336-5586

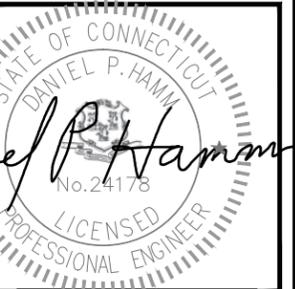

CHECKED BY: KB

APPROVED BY: DPH

**SUBMITTALS**

REV.	DATE	DESCRIPTION	BY
0	03/12/15	ISSUED FOR CONSTRUCTION	SF


SITE NUMBER:  
**CTNL100G**  
SITE NAME:  
**NL100G  
OPTAMAENNERCHOR  
FT**  
SITE ADDRESS:  
**39 MAENNERCHOR AVENUE  
NORWICH, CT 06380  
NEW LONDON COUNTY**

SHEET TITLE  
**COMPOUND &  
ELEVATION PLAN**

SHEET NUMBER  
**A-1**

**STRUCTURAL NOTES:**  
1. ADDITIONAL TOWER MAPPING AND STRUCTURAL ANALYSIS ARE REQUIRED PRIOR TO CONSTRUCTION. DRAWINGS ARE SUBJECT TO CHANGE PENDING OUTCOME OF STRUCTURAL ANALYSIS.  
2. MOUNT ALL ANTENNAS, COAX, ETC. IN ACCORDANCE WITH STRUCTURAL ANALYSIS.

**ANTENNA MOUNT STRUCTURAL ASSESSMENT REQUIREMENT:**  
ENGINEER OF RECORD HAS MADE A VISUAL ASSESSMENT ONLY AND DETERMINED THAT THE EXISTING ANTENNA MOUNT IS ADEQUATE TO ACCOMMODATE ADDITIONAL EQUIPMENT LOADS. STRUCTURAL DESIGNS AND DETAILS AS SHOWN HEREIN FOR STRUCTURAL MODIFICATIONS OF THE EXISTING ANTENNA MOUNT ARE PRELIMINARY ONLY AND FINAL CONSTRUCTION DETAILS ARE SUBJECT TO CHANGE PENDING THE COMPLETION OF AN ANTENNA MOUNT STRUCTURAL ASSESSMENT.

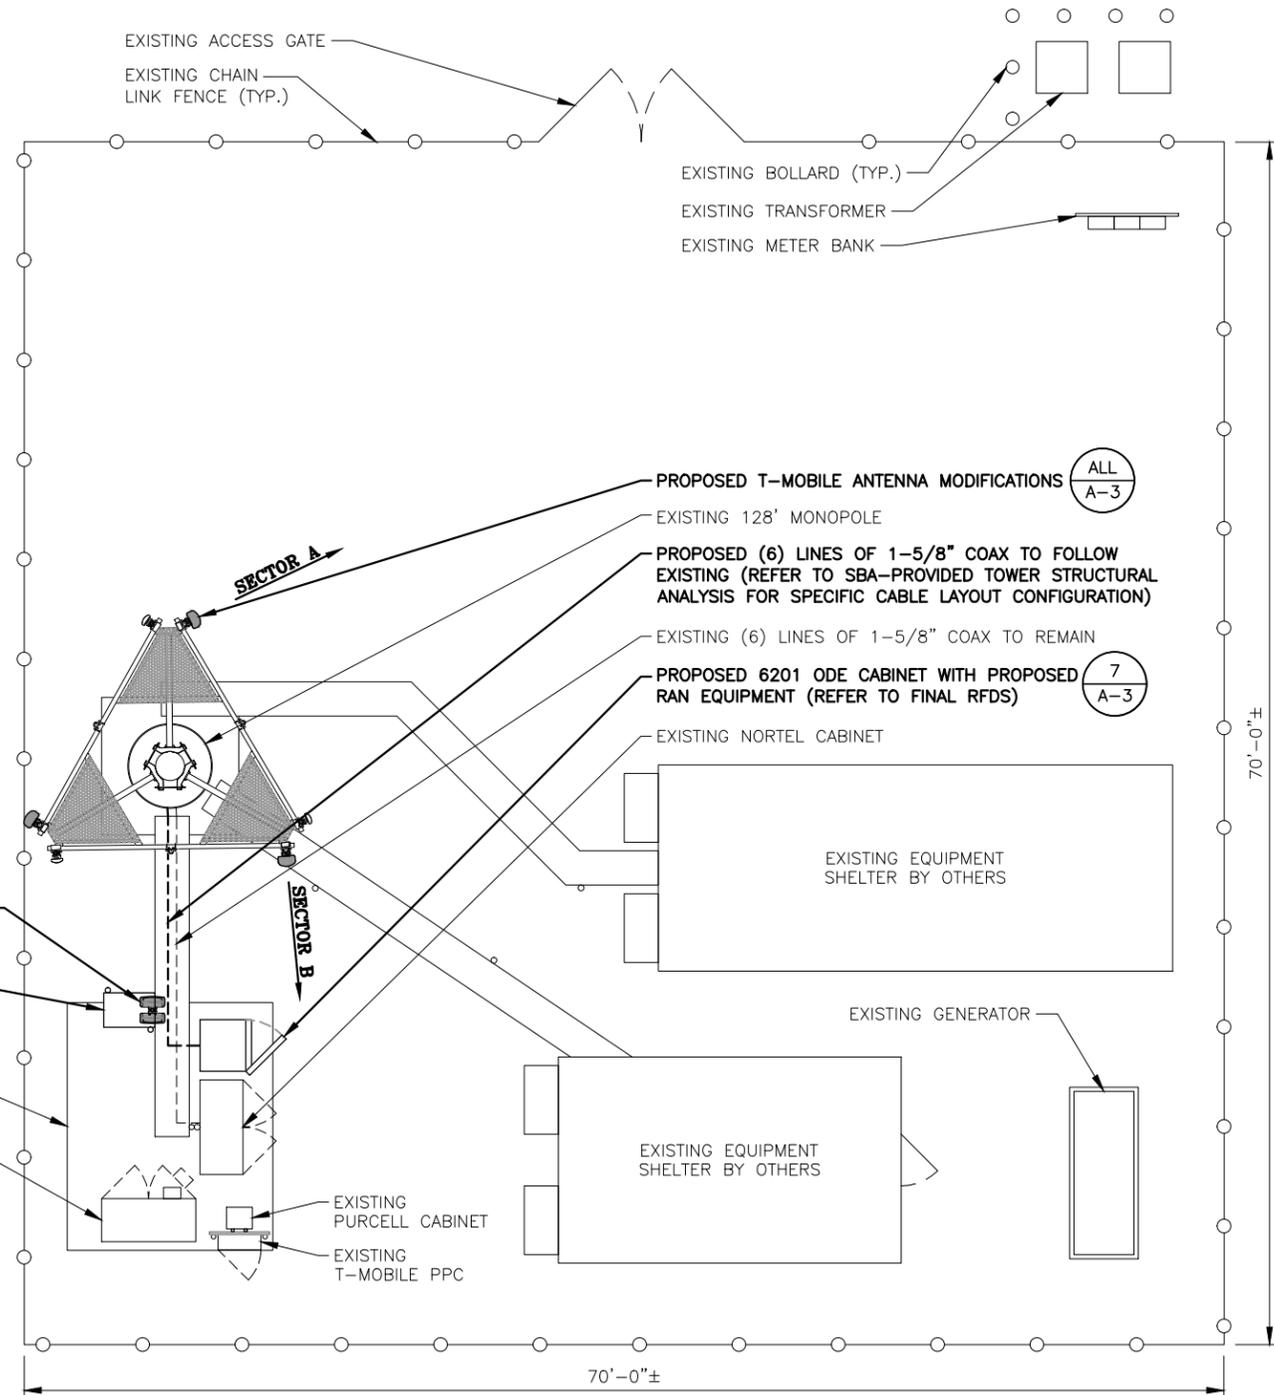

**SPECIAL WORK NOTE:**  
VERTICALLY CENTER ON EXISTING MOUNTING PLATFORM, ALL PIPE MASTS AND ANTENNAS.

EXISTING T-MOBILE ANTENNA TO REMAIN (TYP.)

2 A-2, 1,2 A-3  
T-MOBILE PLATFORM  
ELEV. = 117.0'± A.G.L.

PROPOSED (6) LINES OF 1-5/8" COAX TO FOLLOW EXISTING

EXISTING (6) LINES OF 1-5/8" COAX TO REMAIN



SOURCE: HDG 02-17-2015

**PARTIAL ELEVATION PHOTO DETAIL** (2 A-1)  
SCALE: N.T.S.

EXISTING T-MOBILE GPS ON ICE BRIDGE

PROPOSED 6201 ODE CABINET WITH PROPOSED RAN EQUIPMENT (REFER TO FINAL RFDS)

EXISTING NORTEL CABINET

EXISTING PURCELL CABINET

EXISTING T-MOBILE PPC

EXISTING BBU CABINET





SOURCE: HDG 02-17-2015

**EQUIPMENT PHOTO DETAIL** (3 A-1)  
SCALE: N.T.S.

**COMPOUND PLAN** (1 A-1)  
22x34 SCALE: 3/16"=1'-0"  
11x17 SCALE: 3/32"=1'-0"



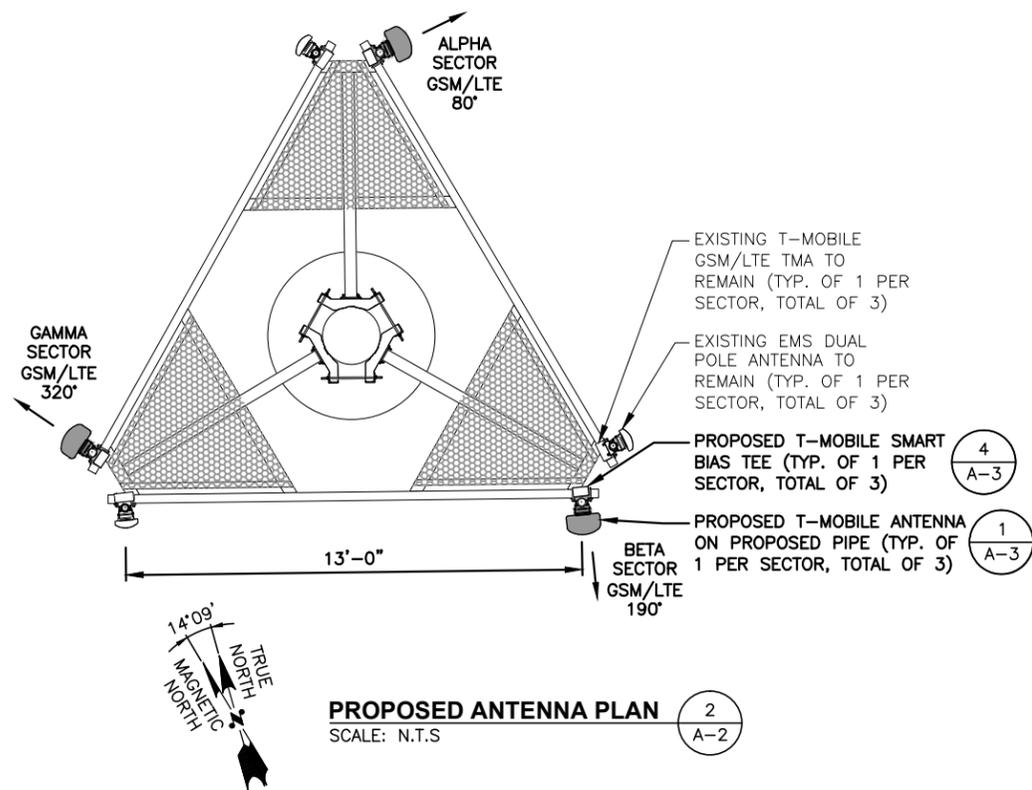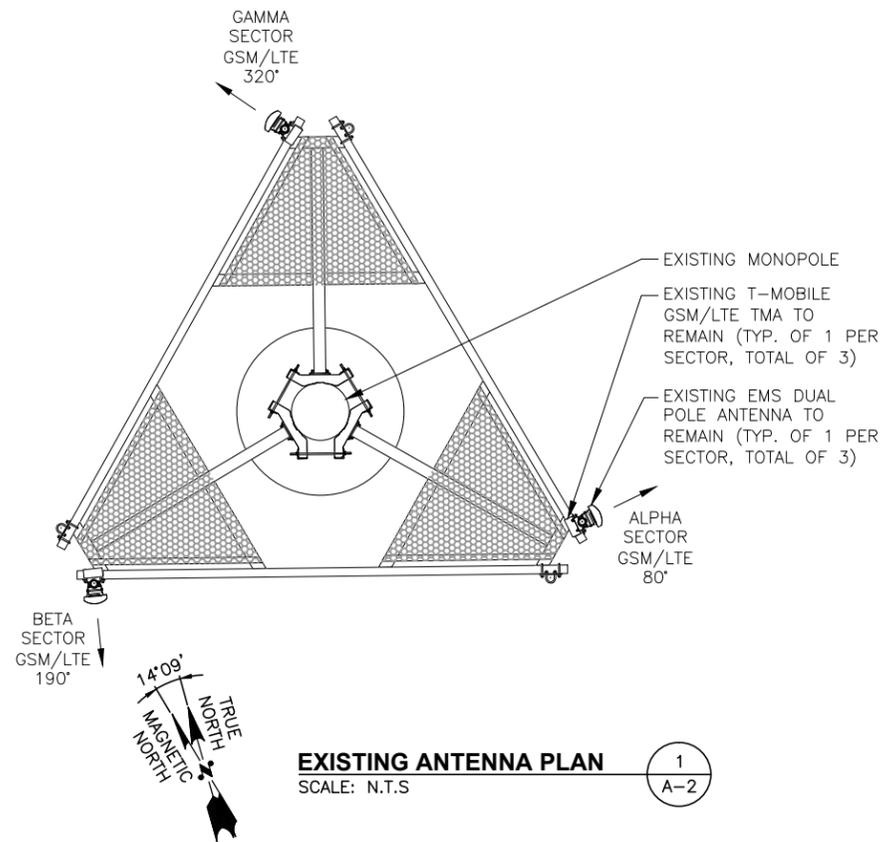

**STRUCTURAL NOTES:**

- ADDITIONAL TOWER MAPPING AND STRUCTURAL ANALYSIS ARE REQUIRED PRIOR TO CONSTRUCTION. DRAWINGS ARE SUBJECT TO CHANGE PENDING OUTCOME OF STRUCTURAL ANALYSIS.
- MOUNT ALL ANTENNAS, COAX, ETC. IN ACCORDANCE WITH STRUCTURAL ANALYSIS.

**ANTENNA MOUNT STRUCTURAL ASSESSMENT REQUIREMENT:**  
ENGINEER OF RECORD HAS MADE A VISUAL ASSESSMENT ONLY AND DETERMINED THAT THE EXISTING ANTENNA MOUNT IS ADEQUATE TO ACCOMMODATE ADDITIONAL EQUIPMENT LOADS. STRUCTURAL DESIGNS AND DETAILS AS SHOWN HEREIN FOR STRUCTURAL MODIFICATIONS OF THE EXISTING ANTENNA MOUNT ARE PRELIMINARY ONLY AND FINAL CONSTRUCTION DETAILS ARE SUBJECT TO CHANGE PENDING THE COMPLETION OF AN ANTENNA MOUNT STRUCTURAL ASSESSMENT.

**SPECIAL WORK NOTE:**  
VERTICALLY CENTER ON EXISTING MOUNTING PLATFORM, ALL PIPE MASTS AND ANTENNAS.

- 1  
A-3 PROPOSED T-MOBILE ANTENNA ON PROPOSED PIPE (TYP. OF 1 PER SECTOR, TOTAL OF 3)
- 4  
A-3 PROPOSED T-MOBILE SMART BIAS TEE (TYP. OF 1 PER SECTOR, TOTAL OF 3)
- EXISTING EMS DUAL POLE ANTENNA TO REMAIN (TYP. OF 1 PER SECTOR, TOTAL OF 3)



**T-MOBILE  
NORTHEAST LLC**

35 GRIFFIN ROAD SOUTH  
BLOOMFIELD, CT 06002  
OFFICE: (860) 648-1116

**SBA**

SBA COMMUNICATIONS CORP.  
33 BOSTON POST ROAD WEST, SUITE 320 TEL: (508) 251-0720  
MARLBOROUGH, MA 01752 FAX: (508) 251-1755

**Hudson  
Design Group**

1600 OSGOOD STREET  
BUILDING 20 NORTH, SUITE 3090 TEL: (978) 557-5553  
N. ANDOVER, MA 01845 FAX: (978) 336-5586

*Daniel P. Hamm*

STATE OF CONNECTICUT  
DANIEL P. HAMM  
No. 24178  
LICENSED  
PROFESSIONAL ENGINEER

CHECKED BY: KB

APPROVED BY: DPH

**SUBMITTALS**

REV.	DATE	DESCRIPTION	BY
0	03/12/15	ISSUED FOR CONSTRUCTION	SF


SITE NUMBER:  
CTNL100G

SITE NAME:  
NL100G  
OPTAMAENNERCHOR  
FT


SITE ADDRESS:  
39 MAENNERCHOR AVENUE  
NORWICH, CT 06380  
NEW LONDON COUNTY

SHEET TITLE  
EXISTING &  
PROPOSED ANTENNA  
PLANS

SHEET NUMBER  
**A-2**

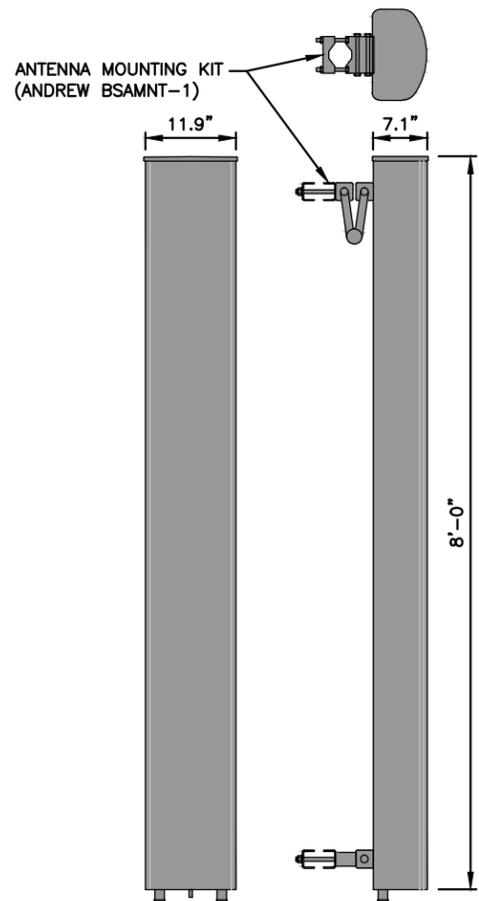


**LNX ANTENNA DETAIL**  
SCALE: N.T.S.

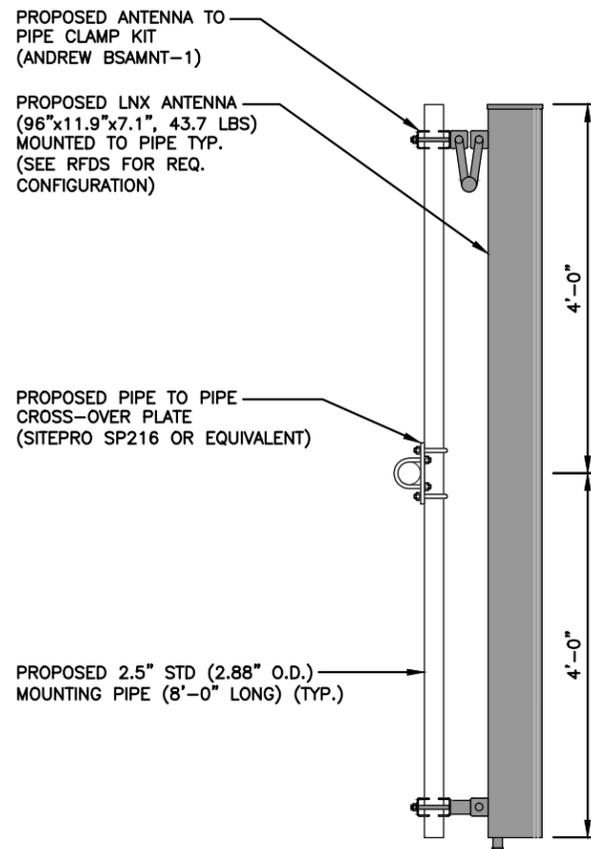

**PROPOSED ANTENNA MOUNTING DETAIL**  
SCALE: N.T.S.

**SPECIAL WORK NOTE:**  
VERTICALLY CENTER ON EXISTING MOUNTING PLATFORM, ALL PIPE MASTS AND ANTENNAS.

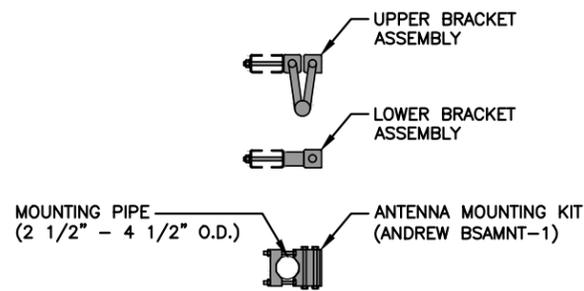


**ANTENNA MOUNTING BRACKET**  
SCALE: N.T.S.


**SMART BIAS TEE (SBT)**  
SCALE: N.T.S.

**ANTENNA MOUNT STRUCTURAL ASSESSMENT REQUIREMENT:**  
ENGINEER OF RECORD HAS MADE A VISUAL ASSESSMENT ONLY AND DETERMINED THAT THE EXISTING ANTENNA MOUNT IS ADEQUATE TO ACCOMMODATE ADDITIONAL EQUIPMENT LOADS. STRUCTURAL DESIGNS AND DETAILS AS SHOWN HEREIN FOR STRUCTURAL MODIFICATIONS OF THE EXISTING ANTENNA MOUNT ARE PRELIMINARY ONLY AND FINAL CONSTRUCTION DETAILS ARE SUBJECT TO CHANGE PENDING THE COMPLETION OF AN ANTENNA MOUNT STRUCTURAL ASSESSMENT.

**STRUCTURAL NOTES:**  
1. ADDITIONAL TOWER MAPPING AND STRUCTURAL ANALYSIS ARE REQUIRED PRIOR TO CONSTRUCTION. DRAWINGS ARE SUBJECT TO CHANGE PENDING OUTCOME OF STRUCTURAL ANALYSIS.  
2. MOUNT ALL ANTENNAS, COAX, ETC. IN ACCORDANCE WITH STRUCTURAL ANALYSIS.

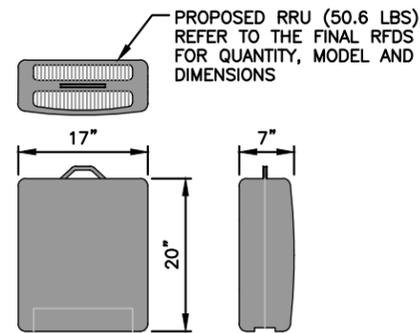

**PROPOSED RRU DETAIL**  
SCALE: N.T.S.

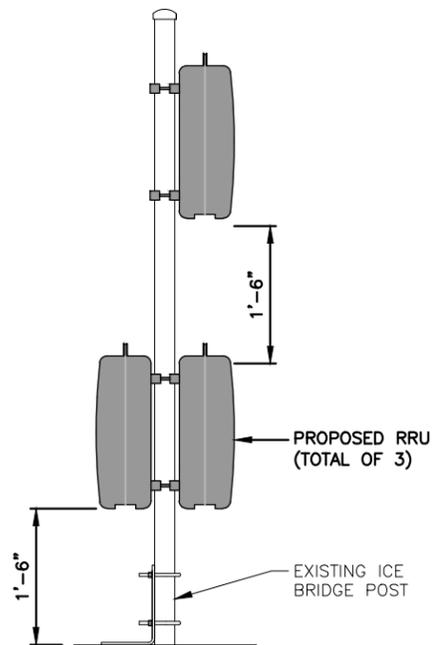


**RRU MOUNTING DETAIL**  
SCALE: N.T.S.


**6201-ODE DIMENSIONS**

WIDTH	36"
DEPTH	36"
HEIGHT	72"
WEIGHT	715 LBS

(INSTALL PER MANUFACTURER'S INSTALLATION GUIDELINES)

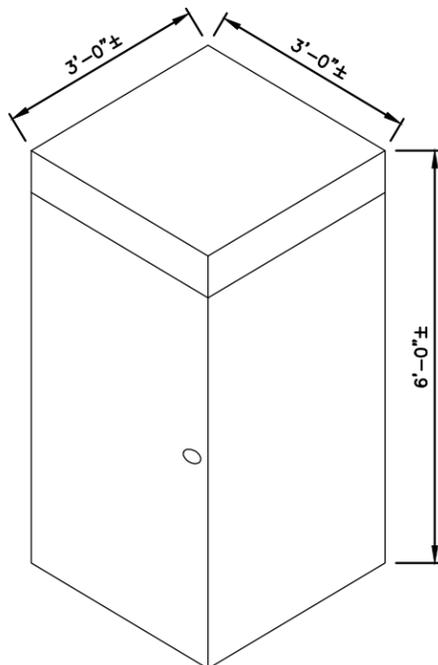

**6201 ODE CABINET**  
SCALE: N.T.S.

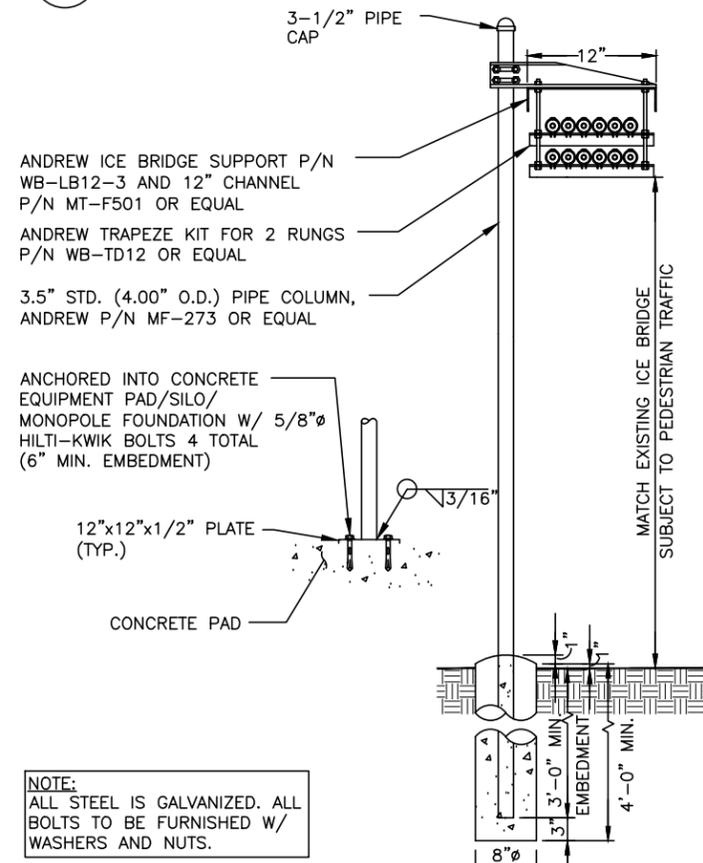

**NOTE:**  
ALL STEEL IS GALVANIZED. ALL BOLTS TO BE FURNISHED W/ WASHERS AND NUTS.

**COAX ICE BRIDGE DETAIL**  
SCALE: N.T.S.

**T-MOBILE NORTHEAST LLC**

35 GRIFFIN ROAD SOUTH  
BLOOMFIELD, CT 06002  
OFFICE: (860) 648-1116

**SBA**

SBA COMMUNICATIONS CORP.  
33 BOSTON POST ROAD WEST, SUITE 320 TEL: (508) 251-0720  
MARLBOROUGH, MA 01752 FAX: (508) 251-1755

**Hudson Design Group**

1600 OSGOOD STREET  
BUILDING 20 NORTH, SUITE 3090 TEL: (978) 557-5553  
N. ANDOVER, MA 01845 FAX: (978) 336-5586

STATE OF CONNECTICUT  
DANIEL P. HAMM  
No. 24178  
LICENSED PROFESSIONAL ENGINEER

CHECKED BY: KB

APPROVED BY: DPH

**SUBMITTALS**

REV.	DATE	DESCRIPTION	BY
0	03/12/15	ISSUED FOR CONSTRUCTION	SF

SITE NUMBER:  
CTNL100G

SITE NAME:  
NL100G OPTAMAENNERCHOR FT

SITE ADDRESS:  
39 MAENNERCHOR AVENUE  
NORWICH, CT 06380  
NEW LONDON COUNTY

SHEET TITLE  
DETAILS

SHEET NUMBER  
**A-3**