



Potential Environmental Impacts

Used oil does not break down easily in the environment and can contain toxic chemicals and heavy metals. If spilled on the ground, poured down storm drains or disposed of with trash, it can pollute surface water or groundwater.

- One gallon of used oil can pollute 1 million gallons of fresh water – a year’s supply for fifty people.
- Used oil can foul sewage treatment processes.
- Because of its properties, a cup of oil can spread a very thin sheen over more than an acre of calm water.
- An oil sheen can block sunlight, impair photosynthesis and prevent the replenishment of dissolved oxygen, which leads to fish kills.



Improper used oil storage: leaking unlabeled drums on the ground.

Legal Requirements

- ◆ Used oil includes crankcase (engine) oil, brake fluid, automatic transmission fluid, power steering fluid, liquid and semi-solid gear, chain, and ball bearing lubricants, and hydraulic fluid. Used oils can be mixed and managed together.
- ◆ Materials that contain or are contaminated with used oil can also fall under the definition of used oil, such as used oil filters, oily rags and wipers, used absorbents, and oily wastewater.
- ◆ Used oil is a regulated waste in Connecticut [RCSA Section 22a-449(c)-119 and 40 CFR 279], and must be recycled (includes burning for energy recovery) [RCSA Section 22a-241b-2(a)(1)(O)].
- ◆ Used oil is not considered hazardous waste unless it is mixed with a hazardous waste such as a chlorinated solvent. If used oil has been mixed with a hazardous waste, see Appendix A for more information on hazardous waste determinations and proper storage and disposal requirements.

If the used oil does not test positive for hazardous waste, the options for management are:

➤ **COLLECT, TEST, HAUL**

1. Collect and store used oil in a secure collection tank or drum, separate from other wastes (proper storage described below).
2. Test the used oil for total halogen content (see Appendix A). Maintain records on site.
3. Contract with a permitted waste oil transporter to haul oil to a permitted recycling

facility. Commercial haulers of such used oil must be permitted to transport used oil in Connecticut. Go to DEEP website for a [list](#) of transporters or call DEEP's Waste Bureau at 866-424-4193.

OR

➤ COLLECT, TEST, BURN

1. Collect and store used oil in a secure collection tank or drum, separate from other wastes (proper storage described below).
2. Test the used oil for total halogen content (see Appendix A). Maintain records on site.
3. Burn the used oil in space heaters for energy recovery (i.e., to heat your shop). Used oil heaters must be designed for that purpose and
 - a. have a maximum design capacity of not more than 0.5 million BTUs per hour; and
 - b. vent combustion gases outside the building; and
 - c. burn only used oil that you generate or that you have collected from your do-it-yourself oil changers.

If you have questions on burning used oil at your facility, contact DEEP's Waste Engineering and Enforcement Division at 888-424-4193 and the Bureau of Air Management 860-424-4152.

What are the requirements for Used Oil Storage?

- ◆ Any storage tank or container for used oil must be on a base that is sufficiently impervious to prevent spills or leaks from reaching soil, groundwater, or surface waters [RCSA Sections 22a-449(c)-100(c)(31) and 22a-449(c)-119(b)(2)(A) and (B)]. A base is considered to be sufficiently impervious if it is:
 - Free of gaps, cracks, and areas of bare earth;
 - Capable of containing spills (i.e., used oil does not leak or penetrate through it);
 - Is not damaged or degraded by contact with used oil (e.g., uncoated asphalt, which will soften and degrade when exposed to used oil for long periods); and,
 - Free of floor drains, catch basins, or other similar structures that would allow used oil to escape to the environment.



Double-walled above ground storage tank

- ◆ In addition to having an impervious surface as described above, any storage tank or container that is located outdoors must be provided with secondary containment [RCSA Sections 22a-449(c)-100(c)(31) and 22a-449(c)-119(b)(2)(A), (C), and (D)].
- ◆ Examples of secondary containment for containers would include berms or walls, and specially-designed secondary containment pallets (available through industrial supply companies). Examples of secondary containment for tanks would include berms or walls, and double-walled tanks.
- ◆ Label the tank or container "Used Oil" [40 CFR 279.22(c)].
- ◆ Use a permitted waste oil transporter to haul the oil to a treatment facility for processing

[CGS Section 22a-454].

- ◆ Keep results of used oil testing for at least 3 years [RCSA Section 22a-449(c)-119(b)(1)(C)].
- ◆ Prepare a Spill Prevention, Control, and Countermeasures (SPCC) Plan if you store more than 1,320 gallons of used (or new) oil. Containers of less than 55 gallons are exempt. [40 CFR 112.1]. See the SPCC Plans Fact Sheet for more information.

How should Used Oil Absorbent Material and Filters be disposed?

- ◆ Materials that contain or are contaminated with used oil can also fall under the definition of used oil. The most common of these materials are used oil absorbent pads, socks, mats, rags and wipers, and loose absorbents (such as kitty litter, speedi-dry, and sawdust).
- ◆ If the used oil absorbent material is
 - dripping with used oil, manage as used oil. (See Used Oil Fact Sheet.)
 - contaminated with used oil, but not dripping, perform a hazardous waste determination. If not hazardous, manage as Connecticut-regulated waste. If hazardous, manage as hazardous waste. (See Appendix A for more information.)
- ◆ Oil filters are regulated as used oil and cannot be thrown in the trash unless they have been punctured and hot drained for 24 hours.

Are there any more requirements?

- ◆ Air conditioning systems may also generate used oils that are contaminated with refrigerants (such as Freon™). This type of used oil must be recycled for its Freon™ content. See the Refrigerants (CFCs) fact sheet for more information.
- ◆ Spills of used oil (or any other petroleum liquids, chemicals, or hazardous waste) must immediately be reported via DEEP's 24-hour spill reporting number: 860-424-3338 or 866-DEP-SPIL.
- ◆ If only used oil generated on-site is stored in the tank or container, no state permits are needed to install an above ground collection tank, but check with your municipality because local permits might be needed.
- ◆ DEEP discourages installation of new underground storage tanks (UST) for used oil. Since November 1985, it has been illegal to install any nonresidential UST or component that is not either fiberglass-reinforced plastic (i.e., noncorrosive) or has a manufacturer-applied anti-corrosive coating and cathodic protection. On or after October 1, 2003, any tank or component installed must be of double-walled construction with continuous interstitial monitoring. See the Petroleum Storage Fact Sheet for more information.


For more information on management of used oil, go to DEEP's [Used Oil webpage](#).

Legal References

- Items to be recycled - [RCSA Section 22a-241b-2\(a\)\(1\)\(O\)](#)
- Standards for the Management of Used Oil - [RCSA Section 22a-449\(c\)-119](#)
- Used oil generators, record retention - [RCSA Section 22a-449\(c\)-119\(b\)\(1\)\(C\)](#)
- Sufficiently impervious definition - [RCSA Sections 22a-449\(c\)-100\(c\)\(31\)](#)
- Secondary containment - [RCSA 22a-449\(c\)-119\(b\)\(2\)\(A\), \(C\), and \(D\)](#)
- Oil Pollution Prevention - [40 CFR 112.1](#)
- Standards for the Management of Used Oil - [40 CFR 279](#)
- Used oil storage - [40 CFR 279.22\(c\)](#)
- Permits, waste oil transporters - [CGS Section 22a-454](#)

Best Management Practices

- ★ Do not mix used oil with anything else, such as chlorinated solvents, or expose oil to electrical contact, brake, or carburetor cleaner which can contaminate used oil while in an engine. Doing so will result in the need to perform a hazardous waste determination on the used oil mixture to establish whether or not the mixture must be managed as a hazardous waste.
- ★ Purchase a non-spill vacuum-type system for spill-proof oil changes.
- ★ Burn your used oil in a used oil fuel space heater. This is also a cost saving measure that eliminates the cost of waste oil removal.
- ★ Recycle used oil filters as scrap metal. Puncture and hot drain them for 24 hours first. The drained oil should be managed as used oil. If you generate large numbers of filters, consider purchasing a filter crusher.
- ★ Use oil absorbent materials to clean up small drips and spills.
- ★ Locate any outdoor used oil storage tanks or containers in a fenced area, which will help prevent unauthorized access or vandalism, minimize possibility of fire or explosion and accidental release of oil to the environment.
- ★ Lock the tank's or the container's fill spout when not in use.
- ★ Provide a roof over outdoor tanks or containers to protect the secondary containment from filling up with rainwater, which may overflow - potentially contaminating the runoff.
- ★ Visually inspect the tank or container on a weekly basis for leaks or malfunctions. Maintain written inspection records.
- ★ Instruct all employees who handle used oil on the proper operation and management of the oil storage area. Assign one person the responsibility for monitoring oil storage.

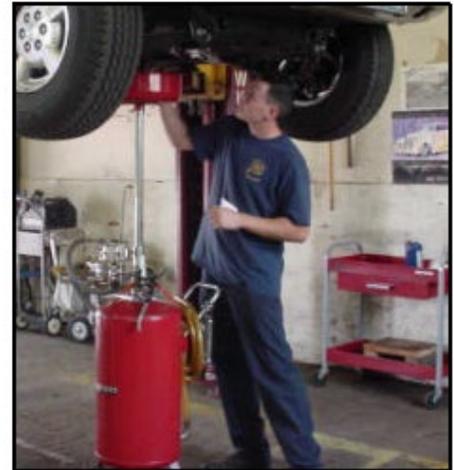

Vacuum-type drain system

- ★ If providing a collection tank or container for used oil from do-it-yourselfers, clearly label the tanks or containers to indicate the importance that ONLY used oil be placed in the tank. Remember that you'll be responsible to pay for disposal of used oil that is contaminated with hazardous waste.
- ★ Keep records of used oil collection.

For more information, call DEEP's Waste Engineering and Enforcement Division at 888-424-4193.

Pollution Prevention Checklist

- ✓ Do you have oil absorbent materials readily available for use by your staff?
- ✓ Do you drain oils using a non-spill vacuum-type system?



Did You Know?

One gallon of used oil yields the same 2.5 quarts of lubricating oil as 42 gallons of virgin crude oil. Re-refining used oil only requires 1/3 of the energy needed to refine crude oil.

DISCLAIMER: This guidance is a tool to help you evaluate compliance at your facility. It is not a complete list of all regulations and requirements that may apply to your business. You are responsible for knowing and complying with all updated applicable state, federal, local and tribal requirements. Please be aware that environmental laws and regulations, as well as process technology may have changed significantly since these were published. Please do not rely on them for current information, but rather to provide background information.

Connecticut Department of Energy and Environmental Protection, Office of Pollution Prevention, 860-424-3297. Published 2014, Links updated January 2023
[Vehicle Repair and Body Shops P2 Fact Sheet Index](#)