

YASKAWA

SOLECTRIA XGI™ 1500

Premium 3-Phase Transformerless Utility-Scale Inverters

Features

- Made in the USA with global components
- Buy American Act (BAA) compliant
- Four models: 125kW/125kVA, 125kW/150kVA, 150kW/166kVA, 166kW/166kVA
- 99.0% peak efficiency
- Flexible solution for distributed and centralized system architecture
- Advanced grid-support functionality Rule 21/UL1741SA
- Robust, dependable and built to last
- Lowest O&M and installation costs
- Access all inverters on site via WiFi from one location
- Remote diagnostics and firmware upgrades
- SunSpec Modbus Certified

Options

- String combiners for distributed and centralized systems
- Web-based monitoring
- Extended warranty



Yaskawa Solectria Solar's XGI 1500 utility-scale string inverters are designed for high reliability and built of the highest quality components that were selected, tested and proven to last beyond their warranty. The XGI 1500 inverters provide advanced grid-support functionality and meet the latest IEEE 1547 and UL 1741 standards for safety. The XGI 1500 inverters are the most powerful 1500VDC string inverters in the PV market and have been engineered for both distributed and centralized system architecture. Designed and engineered in Lawrence, MA, the new SOLECTRIA XGI inverters are assembled and tested at Yaskawa America's facilities in Buffalo Grove, IL. The XGI 1500 inverters are Made in the USA with global components and are compliant with the Buy American Act.

MADE IN THE USA



With U.S. and Global Components

SOLECTRIA SOLAR

SOLECTRIA XGI 1500

Specifications

	XGI 1500-125/125	XGI 1500-125/150	XGI 1500-150/166	XGI 1500-166/166
DC Input				
Absolute Maximum Input Voltage	1500 VDC	1500 VDC	1500 VDC	1500 VDC
Maximum Power Input Voltage Range (MPPT)	860-1250 VDC	860-1250 VDC	860-1250 VDC	860-1250 VDC
Operating Voltage Range (MPPT)	860-1450 VDC	860-1450 VDC	860-1450 VDC	860-1450 VDC
Number of MPP Trackers	1 MPPT	1 MPPT	1 MPPT	1 MPPT
Maximum Operating Input Current	148.3 A	148.3 A	178.0 A	197.7 A
Maximum Operating PV Power	128 kW	128 kW	153 kW	170 kW
Maximum DC/AC Ratio Max Rated PV Power	2.0 250 kW	2.0 250 kW	1.66 250 kW	1.5 250 kW
Max Rated PV Short-Circuit Current ($\Sigma I_{sc} \times 1.25$)	320 A	320 A	320 A	320 A
AC Output				
Nominal Output Voltage	600 VAC, 3-Ph	600 VAC, 3-Ph	600 VAC, 3-Ph	600 VAC, 3-Ph
AC Voltage Range	-12% to +10%	-12% to +10%	-12% to +10%	-12% to +10%
Continuous Real Output Power	125 kW	125 kW	150 kW	166 kW
Continuous Apparent Output Power	125 kVA	150 kVA	166 kVA	166 kVA
Maximum Output Current	120 A	144 A	160 A	160 A
Nominal Output Frequency	60 Hz	60 Hz	60 Hz	60 Hz
Power Factor (Unity default)	+/- 0.80 Adjustable	+/- 0.80 Adjustable	+/- 0.80 Adjustable	+/- 0.80 Adjustable
Total Harmonic Distortion (THD) @ Rated Load	<3%	<3%	<3%	<3%
Grid Connection Type	3-Ph + N/GND	3-Ph + N/GND	3-Ph + N/GND	3-Ph + N/GND
Fault Current Contribution (1 cycle RMS)	144 A	173 A	192 A	192 A
Efficiency				
Peak Efficiency	98.9%	98.9%	99.0%	99.0%
CEC Average Efficiency	98.5%	98.5%	98.5%	98.5%
Tare Loss	<1 W	<1 W	<1 W	<1 W
Temperature				
Ambient Temperature Range	-40°F to 140°F (-40C to 60C)		-40°F to 140°F (-40C to 60C)	
De-Rating Temperature	122°F (50C)		113°F (45C)	
Storage Temperature Range	-40°F to 167°F (-40C to 75C)		-40°F to 167°F (-40C to 75C)	
Relative Humidity (non-condensing)	0 - 95%		0 - 95%	
Operating Altitude	9,840 ft (3 km)		9,840 ft (3 km)	
Communications				
Advanced Graphical User Interface	WiFi			
Communication Interface	Ethernet			
Third-Party Monitoring Protocol	SunSpec Modbus TCP/IP			
Web-Based Monitoring	Optional			
Firmware Updates	Remote and Local			
Testing & Certifications				
Safety Listings & Certifications	UL 1741, IEEE 1547, UL 1998			
Advanced Grid Support Functionality	Rule 21, UL 1741SA			
Testing Agency	ETL			
FCC Compliance	FCC Part 15, Class A			
Warranty				
Standard and Options	5 Years Standard; Option for 10 Years			
Enclosure				
Acoustic Noise Rating	56 dBA @ 3 m			
DC Disconnect	Integrated 2-Pole 250 A DC Disconnect			
Mounting Angle	Vertical only			
Dimensions	Height: 29.5 in. (750 mm) Width: 39.4 in. (1000 mm) Depth: 15.1 in. (380 mm) Specifications subject to change.			
Weight	270 lbs (122 kg)			
Enclosure Rating and Finish	Type 4X, Polyester Powder-Coated Aluminum			



SOLECTRIA SOLAR

Yaskawa Solectria Solar
360 Merrimack Street
Lawrence, MA 01843
solectria.com

1-978-683-9700
Email: inverters@solectria.com

Document FL.XGI1500.01
2/6/2020
© 2020 Yaskawa – Solectria Solar

YASKAWA

HIGH PERFORMANCE BIFACIAL PERC MONOCRYSTALLINE MODULE

RSM144-6-370BMDG-390BMDG

144 CELL MONOCRYSTALLINE MODULE

370-390Wp POWER OUTPUT RANGE

1500VDC MAXIMUM SYSTEM VOLTAGE

19.5% MAXIMUM EFFICIENCY



About Risen Energy

Risen Energy is a leading, global tier 1 manufacturer of high-performance solar photovoltaic products and provider of total business solutions for residential, commercial and utility-scale power generation. The company, founded in 1986, and publicly listed in 2010, compels value generation for its chosen global customers. Techno-commercial innovation, underpinned by consummate quality and support, encircle Risen Energy's total Solar PV business solutions which are among the most powerful and cost-effective in the industry. With local market presence and strong financial bankability status, we are committed, and able, to building strategic, mutually beneficial collaborations with our partners, as together we capitalise on the rising value of green energy.



KEY SALIENT FEATURES



Global, Tier 1 bankable brand, with independently certified state-of-the-art automated manufacturing



Bifacial technology enables additional energy harvesting from rear side (up to 25%)



Industry leading lowest thermal co-efficient of power



Industry leading 12 years product warranty



Excellent low irradiance performance



Excellent PID resistance



Positive tight power tolerance



Dual stage 100% EL Inspection warranting defect-free product



Module Imp binning radically reduces string mismatch losses




Warranted reliability and stringent quality assurances well beyond certified requirements



Certified to withstand severe environmental conditions


- ♦ Anti-reflective & anti-soiling surface minimise power loss from dirt and dust
- ♦ Severe salt mist, ammonia & blown sand resistance, for seaside, farm and desert environments
- ♦ Excellent mechanical load 2400Pa & snow load 5400Pa resistance





RISEN ENERGY CO., LTD.
Tashan Industry Zone, Meilin,
Ninghai 315609, Ningbo | PRC
Tel: +86-574-59953239
Fax: +86-574-59953599
E-mail: info@risenenergy.com
Website: www.risenenergy.com

LINEAR PERFORMANCE WARRANTY


12 year Product Warranty / 30 year Linear Power Warranty

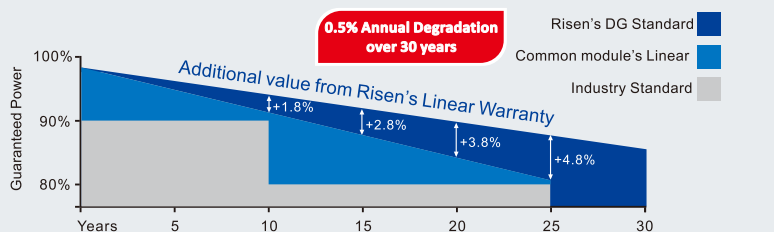

Dimensions of PV Module Unit: mm

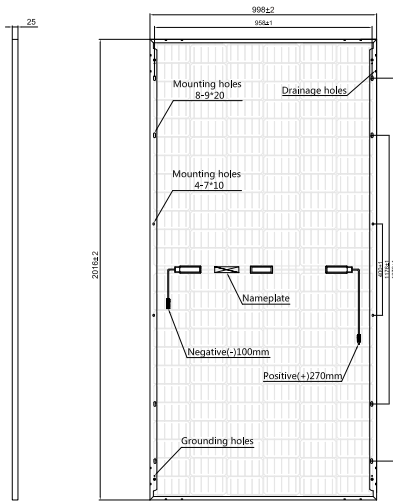


RSM144-6-390BMDG

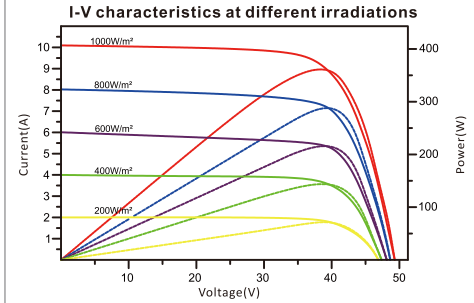

I-V characteristics at different temperatures

(AM1.5, 1000W/m²)

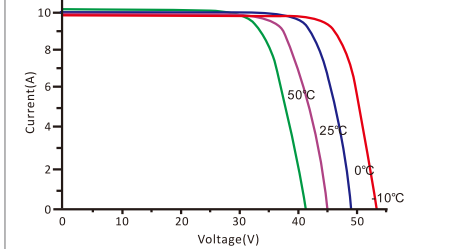

ELECTRICAL DATA (STC)

Model Number	RSM144-6-370BMDG	RSM144-6-375BMDG	RSM144-6-380BMDG	RSM144-6-385BMDG	RSM144-6-390BMDG
Rated Power in Watts-Pmax(Wp)	370	375	380	385	390
Open Circuit Voltage-Voc(V)	47.60	47.75	48.00	48.15	48.30
Short Circuit Current-Isc(A)	9.90	10.00	10.10	10.20	10.30
Maximum Power Voltage-Vmpp(V)	39.80	39.90	40.05	40.15	40.25
Maximum Power Current-Imp(A)	9.30	9.40	9.50	9.60	9.70
Module Efficiency (%)	18.5	18.8	19.0	19.3	19.5
Encapsulated Cell Efficiency (%)	20.8	21.1	21.4	21.6	21.9

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.
 Power production tolerance: 0~+3%

REAR SIDE POWER GAIN BIFACIAL FACTOR:75%±5

Model Number	RSM144-6-370BMDG	RSM144-6-375BMDG	RSM144-6-380BMDG	RSM144-6-385BMDG	RSM144-6-390BMDG
10% Power Output(Wp)	407	413	418	424	429
15% Power Output(Wp)	426	431	437	443	449
20% Power Output(Wp)	444	450	456	462	468
25% Power Output(Wp)	463	469	475	481	488

ELECTRICAL DATA (NMOT)

Model Number	RSM144-6-370BMDG	RSM144-6-375BMDG	RSM144-6-380BMDG	RSM144-6-385BMDG	RSM144-6-390BMDG
Maximum Power-Pmax (Wp)	276.7	280.3	284.4	288.1	291.8
Open Circuit Voltage-Voc (V)	43.8	43.9	44.2	44.3	44.4
Short Circuit Current-Isc (A)	8.12	8.20	8.28	8.36	8.45
Maximum Power Voltage-Vmpp (V)	36.5	36.6	36.7	36.8	36.9
Maximum Power Current-Imp (A)	7.59	7.67	7.75	7.83	7.92

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Monocrystalline, 6" half cell
Cell configuration	144 cells (6×12×6×12)
Module dimensions	2016×998×25mm
Weight	26kg
Superstrate	2.0 mm, ARC Glass
Substrate	2.0 mm, Glazed Glass
Frame	Anodized Aluminium Alloy type 6063T5, Silver Color
J-Box	Potted, IP68, 1500VDC, 3 Schottky bypass diodes
Cables	4.0mm² (12AWG), positive 270mm length, negative 100mm length
Connector	Risen Twinsel PV-SY02, IP68

TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	45°C±2°C
Temperature Coefficient of Voc	-0.29%/°C
Temperature Coefficient of Isc	0.06%/°C
Temperature Coefficient of Pmax	-0.37%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	20A
Limiting Reverse Current	20A

PACKAGING CONFIGURATION

	40ft	20ft
Number of modules per container	880	400
Number of modules per pallet	40	40
Number of pallets per container	22	10
Packaging box dimensions (LxWxH) in mm	2110×1130×1140	2110×1130×1140
Box gross weight[kg]	1100	1100

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.


©2019 Risen Energy. All rights reserved. Specifications included in this datasheet are subject to change without notice.

THE POWER OF RISING VALUE

THE

DUOMAX twin

BIFACIAL DUAL GLASS 144 CELL MULTI BUSBAR MODULE

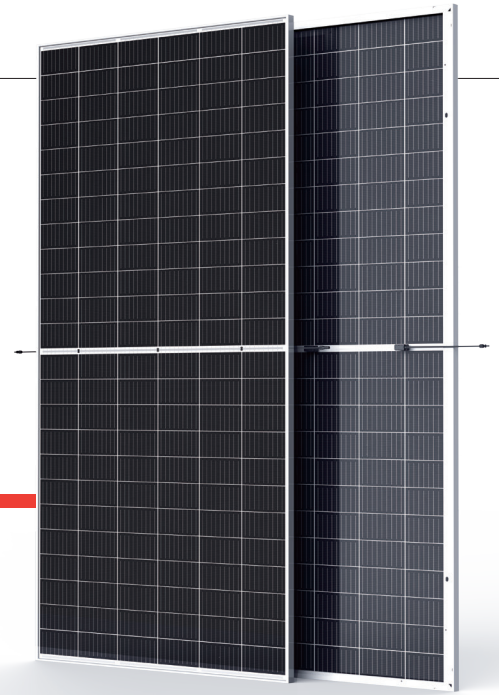

144-Cell

MONOCRYSTALLINE MODULE

390-410W

POWER OUTPUT RANGE

20.2%

MAXIMUM EFFICIENCY

0~+5W

POSITIVE POWER TOLERANCE

Founded in 1997, Trina Solar is the world's leading total solution provider for solar energy. With local presence around the globe, Trina Solar is able to provide exceptional service to each customer in each market and deliver our innovative, reliable products with the backing of Trina as a strong, bankable brand. Trina Solar now distributes its PV products to over 100 countries all over the world. We are committed to building strategic, mutually beneficial collaborations with installers, developers, distributors and other partners in driving smart energy together.

Comprehensive Products and System Certificates

IEC61215/IEC61730/IEC61701/IEC62716

ISO 9001: Quality Management System

ISO 14001: Environmental Management System

ISO14064: Greenhouse Gases Emissions Verification

OHSAS 18001: Occupation Health and Safety Management System



PRODUCTS

TSM-DEG15MC.20(II)

POWER RANGE

390-410W



High power output

- Up to 410W front power and 20.2% module efficiency with half-cut and MBB (Multi Busbar) technology enabling higher BOS savings
- Lower resistance of half-cut cells ensures higher power



Certified to perform in highly challenging environments

- High PID resistance through cell process and module material control
- Resistant to salt, acid, sand, and ammonia
- Proven to be reliable in high temperature and humidity areas
- Certified to the best fire class A
- Minimizes micro-crack and snail trails
- Certified to 5400 Pa positive load and 2400 Pa negative load



High energy generation, low LCOE


- Up to 25% additional power gain from back side, depending on the albedo
- Excellent 3rd party validated IAM and low light performance with cell process and module material optimization
- Low temp coefficient (-0.35%) and NMOT increases energy production
- Better anti-shading performance and lower operating temperature
- Higher power from same installation footprint as standard modules



Easy to install, wide application


- Frame design enables compatibility with standard installation methods
- Deployable for ground mounted utility, carports, and agricultural projects
- Safe and easy to transport, handle, and install like normal framed modules

Trina Solar's DUOMAX Performance Warranty

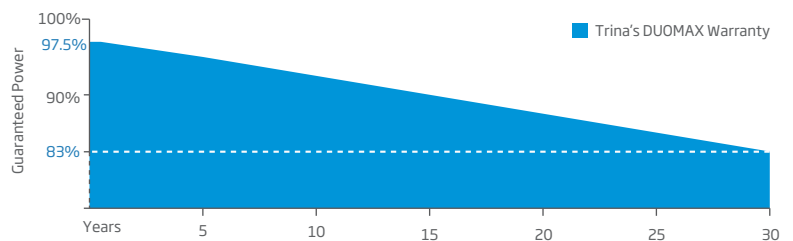


From the 2nd year to the 30th year, the average annual power decline will be no more than 0.5%.


DIMENSIONS OF PV MODULE (mm)

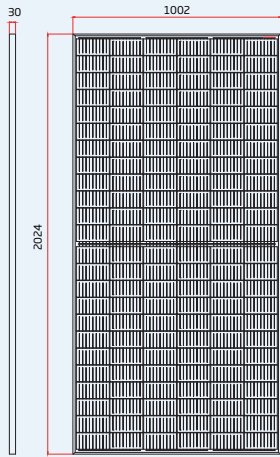

Front View

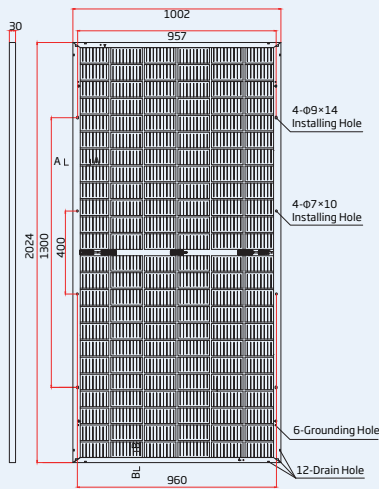


Back View




A-A

B-B

I-V CURVES OF PV MODULE (405 W)

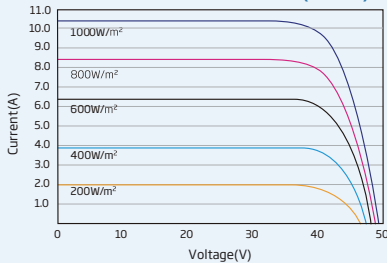

P-V CURVES OF PV MODULE (405W)

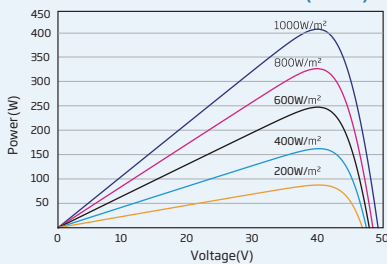

ELECTRICAL DATA (STC)

Peak Power Watts- P_{MAX} (Wp)*	390	395	400	405	410
Power Output Tolerance- P_{MAX} (W)	0 ~ +5				
Maximum Power Voltage- V_{MPP} (V)	40.2	40.5	40.8	41.1	41.4
Maximum Power Current- I_{MPP} (A)	9.71	9.76	9.81	9.86	9.91
Open Circuit Voltage- V_{OC} (V)	48.5	48.7	48.9	49.1	49.3
Short Circuit Current- I_{SC} (A)	10.25	10.29	10.33	10.37	10.41
Module Efficiency η_m (%)	19.2	19.5	19.7	20.0	20.2

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.
*Measuring tolerance: ±3%.

ELECTRICAL DATA (NMOT)

Maximum Power- P_{MAX} (Wp)	295	299	302	306	310
Maximum Power Voltage- V_{MPP} (V)	37.7	38.0	38.3	38.6	38.9
Maximum Power Current- I_{MPP} (A)	7.82	7.86	7.90	7.93	7.97
Open Circuit Voltage- V_{OC} (V)	45.7	45.9	46.1	46.3	46.5
Short Circuit Current- I_{SC} (A)	8.26	8.29	8.33	8.36	8.39

NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

Electrical characteristics with different rear side power gains (referenced specifically to 405 Wp front)**

Maximum Power- P_{MAX} (Wp)	425	446	466	486	506
Maximum Power Voltage- V_{MPP} (V)	41.1	41.1	41.1	41.1	41.1
Maximum Power Current- I_{MPP} (A)	10.35	10.85	11.34	11.83	12.33
Open Circuit Voltage- V_{OC} (V)	49.2	49.3	49.4	49.5	49.6
Short Circuit Current- I_{SC} (A)	10.89	11.41	11.93	12.44	12.96
P_{max} gain	5%	10%	15%	20%	25%

Power Bifaciality: 70±5%.

MECHANICAL DATA

Solar Cells	Monocrystalline
Cell Orientation	144 cells (6 × 24)
Module Dimensions	2024 × 1002 × 30 mm (79.69 × 39.45 × 1.18 inches)
Weight	26.0 kg (57.3 lb)
Front Glass	2.0 mm (0.08 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	POE/EVA
Back Glass	2.0 mm (0.08 inches), Heat Strengthened Glass (White Grid Glass)
Frame	30mm (1.18 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0 mm ² (0.006 inches ²) Portrait: 280/280 mm (11.02/11.02 inches) Landscape: 1900/1900 mm (74.80/74.80 inches)
Connector	Trina TS4

TEMPERATURE RATINGS

NMOT (Nominal Module Operating Temperature)	41°C (±3°C)
Temperature Coefficient of P_{MAX}	- 0.35%/°C
Temperature Coefficient of V_{OC}	- 0.25%/°C
Temperature Coefficient of I_{SC}	0.04%/°C

(Do not connect Fuse in Combiner Box with two or more strings in parallel connection)

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
	1500V DC (UL)
Max Series Fuse Rating	20A

WARRANTY

12 year Product Workmanship Warranty

30 year Power Warranty

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 35 pieces

Modules per 40' container: 665 pieces

** Back-side power gain varies depending upon the specific project albedo