



SAI Group
12 Industrial Way
Salem, NH 03079
603-421-0470

June 16, 2023

Melanie A. Bachman
Executive Director
Connecticut Siting Council
10 Franklin Square
New Britain, CT 06051

Notice of Exempt Modification – New Cingular Wireless PCS, LLC (AT&T)
24 Town House Road (Durham Fairgrounds), Durham, CT
N 41.470150
W 72.681682

Dear Ms. Bachman:

AT&T intends to install a temporary cellular communications facility for service during the Durham Agricultural Fair 2023 in Durham, Connecticut. Please accept this letter as notification pursuant to Regulations of Connecticut State Agencies § 16-50j-73, of construction that constitutes an exempt modification under R.C.S.A. § 16-50j-72(d). In accordance with R.C.S.A. § 16-50j-73, a copy of this letter is being sent to George Eames, First Selectman for the Town of Durham, the Durham Building Inspector and the property owner.

AT&T operates under licenses issued by the Federal Communications Commission (FCC) to provide mobile communications service in Tolland County, which includes the area to be served by AT&T's proposed temporary installation. The proposed temporary facility would be installed at the Durham Fairgrounds, which is owned by the Durham Agricultural Fair Association.

Proposed Temporary Facility

The proposed temporary cell site meets the criteria set forth in R.C.S.A § 16-50j-72(d) for temporary cellular service for events of statewide significance. The site is necessary to provide additional system capacity to accommodate increased communication needs during the 2023 Durham Agricultural Fair. This facility may include B2, B5, B17, B14, B29, B30, B66 & n77 hardware that is 4G(LTE) and/or 5GNR capable through remote software configuration and either or both services may be turned on or off at various times.

The 2023 Durham Agricultural Fair will be held at the Durham Fairgrounds from September 21st – 24th 2023. The temporary cell site will be located within the Fairgrounds property, as illustrated in the attached Aerial Photograph. An e-mail from Durham Agricultural Fair Association Vice President Daniel Miramant authorizing AT&T to use the location for this purpose is attached. AT&T's equipment will be deployed to the Fairgrounds on or around August 22nd. The site will begin on-air operations on September 8th and will be removed on or around October 3rd.

AT&T's temporary cell site will consist of radio equipment installed in a fully self-contained vehicle referred to as a Super COLT (Cell on Light Truck). The COLT carries three integrated pneumatic masts, two of which can be extended to a height of 38 ft above ground level, while the third can be extended to a height of 59 ft above ground level. Guy lines will stabilize and support the antenna masts when extended. Power and Telephone connections will be provided from the existing utility services at the Fairgrounds. The proposed temporary cell site will not increase noise levels by six decibels or more.

The COLT will be fitted with three (3) Kathrein 840-10520 antennas at 50 feet, three (3) Ericsson AIR6449 B77D antennas at 45 feet, one (1) Galtronics GP2406-06670 antenna and one (1) CCI MBA10-6F-BU-H3 antenna at 40 feet, one (1) Matsing MS-6.3DB90 antenna at 39 feet, and three (3) Ericsson AIR1281 antennas at 35 feet above ground level.

Power Density Calculations

AT&T's temporary cell site will not result in a total radio frequency electromagnetic radiation power density, measured at six feet above ground level at the temporary tower location, at or above State or Federal standards. Please see attached Radio Frequency Emissions Report. The report shows that AT&T's temporary transmissions from the temporary cell site will result in a maximum cumulative percent of MPE that is calculated to be 72.61% of the FCC limit for general population / uncontrolled environments.

Conclusion

For the foregoing reasons, AT&T respectfully submits that the proposed modifications to the above-referenced telecommunications facility constitute an exempt modification under R.C.S.A. § 16-50j-72(b)(2).

Please feel free to call me at (860) 670-9068 with any questions regarding this Notice. Thank you for your consideration in this matter.

Sincerely,

Mark Roberts

Mark Roberts
Consultant for SAI
Mark.Roberts@QCDevelopment.net

Attachments

cc: George Eames – First Selectman
Dick McManus – Building Inspector
Durham Agricultural Fair Association – Property Owner

Durham, CT : Assessor Database

Property Search:

Parcel ID:	Alternate ID:	Owner 1 Name:	Street Number:	Street Name:
			24	TOWN HOUSE RD

Search Reset

Property Detail:

Parcel ID:	Alternate ID/Map Block Lot:	Card:	Card:	Street Name:	Street Number:	Zoning:	LUC:	Acres:
D0079000	48 02+58 13	4	4	TOWN HOUSE RD	24	MR/FR		30.51

Owner Information:

Owner 1 Name:	DURHAM AGRICULTURAL FAIR ASSOC
Owner 2 Name:	
Street 1:	POB 225
Street 2:	
City:	DURHAM
State:	CT
Zip:	06422
Volume:	69
Page:	431
Deed Date:	1965-12-09

Building Information:

Building Number:	2
Units:	1
Structure Type:	FOOD STAND
Grade:	D
Identical Units:	1
Year Built:	1930


Valuation:

Appraised Land:	\$1,918,000.00
Appraised Land PA490:	\$0.00
Appraised Bldg:	\$2,515,900.00
Appraised Total:	\$4,433,900.00
Total Assessment:	\$3,103,730.00

Property Images:

Picture:
There is no picture available.

Sketch:

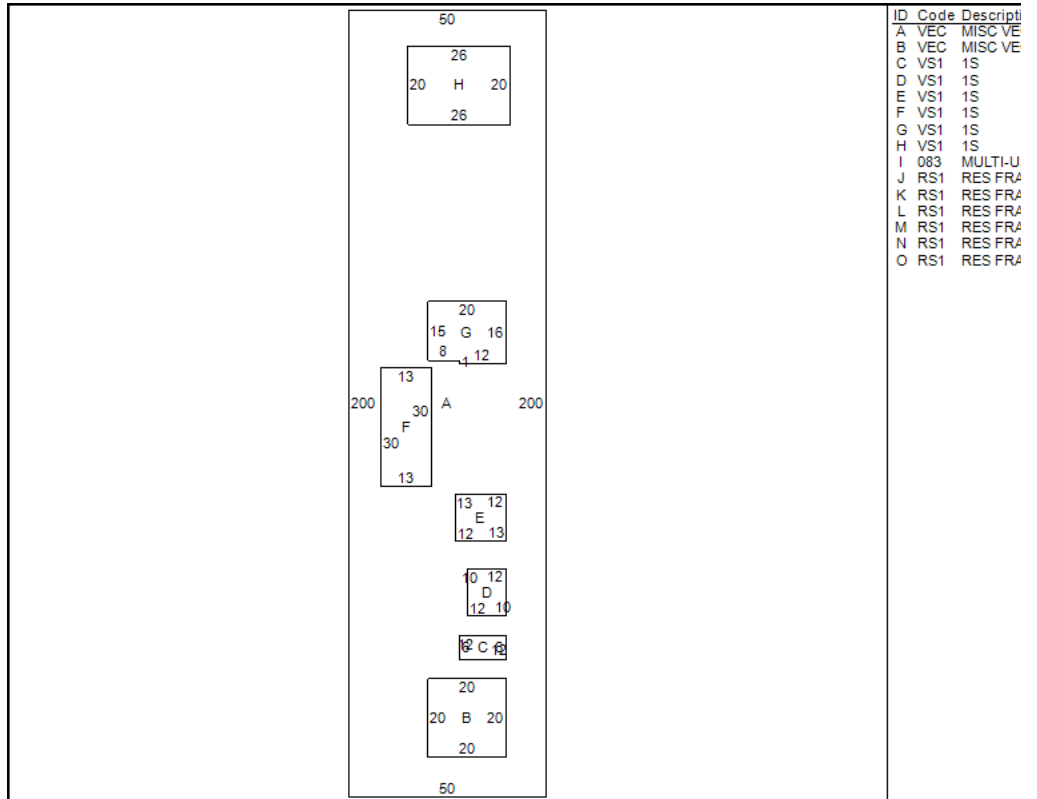

ID	Code	Descripti
A	VEC	MISC VE
B	VEC	MISC VE
C	VS1	1S
D	VS1	1S
E	VS1	1S
F	VS1	1S
G	VS1	1S
H	VS1	1S
I	083	MULTI-U
J	RS1	RES FR
K	RS1	RES FR
L	RS1	RES FR
M	RS1	RES FR
N	RS1	RES FR
O	RS1	RES FR

Out-Buildings:

Code:	Description:	Units:	Year Built:	Size1:	Size2:	Area:	Grade:	C
RS1	FRAME UTILITY SHED	1	1988	1	960	960	C	A
RS1	FRAME UTILITY SHED	4	1998	16	24	384	C	A
RS1	FRAME UTILITY SHED	1	1930	12	16	192	C	A
RS1	FRAME UTILITY SHED	1	1996	30	32	960	C	A
SH1	FRAME MACHINERY SHED	1	1930	40	82	3280	B	A
RS1	FRAME UTILITY SHED	1	1990	6	12	72	C	A
TR1	RESTROOM STR/FRM-CB	1	1930	32	50	1600	C	A
RS1	FRAME UTILITY SHED	1	1980	16	24	384	C	A
SH3	FINISHED METAL SHED	1	2000	100	200	20000	C	A
RS1	FRAME UTILITY SHED	1	1989	24	32	768	C	A
RS1	FRAME UTILITY SHED	1	1930	10	12	120	C	A
SH1	FRAME MACHINERY SHED	1	1930	29	209	6061	C	C
RS1	FRAME UTILITY SHED	1	1930	16	24	384	C	A
SH1	FRAME MACHINERY SHED	1	1930	40	100	4000	B	C
RS1	FRAME UTILITY SHED	1	1930	12	13	156	C	A
RS1	FRAME UTILITY SHED	1	1930	24	24	576	C	A
RS1	FRAME UTILITY SHED	1	1930	1	608	608	C	A
SH3	FINISHED METAL SHED	1	1930	60	96	5760	C	A

RS1	FRAME UTILITY SHED	1	1930	13	18	234	B	G
RS1	FRAME UTILITY SHED	1	1970	10	12	120	C	A
RS1	FRAME UTILITY SHED	1	1970	10	18	180	C	A
SH3	FINISHED METAL SHED	1	1999	160	220	35200	C	A
SH3	FINISHED METAL SHED	1	2000	100	300	30000	C	A
RS1	FRAME UTILITY SHED	1	1930	24	18	432	C	A
RS1	FRAME UTILITY SHED	1	2002	10	12	120	C	A
RS1	FRAME UTILITY SHED	1	1930	18	20	360	C	A
RS1	FRAME UTILITY SHED	1	1999	20	25	500	C	A
SH3	FINISHED METAL SHED	1	1996	160	220	35200	C	A
RS1	FRAME UTILITY SHED	1	1930	11	11	121	C	A
RS1	FRAME UTILITY SHED	1	1930	1	390	390	D	A
CP5	CANOPY ONLY	1	1980	42	84	3528	C	A
RS1	FRAME UTILITY SHED	1	1988	12	16	192	C	A
RS1	FRAME UTILITY SHED	1	1930	20	26	520	C	A
RS1	FRAME UTILITY SHED	1	1930	14	20	280	C	A
SH3	FINISHED METAL SHED	1	1999	0	0	20400	C	A
CP5	CANOPY ONLY	1	2002	12	120	1440	A	A

Building Interior/Exterior Information:

Floor From:	Floor To:	Area:	Use Type:	Exterior Walls:	Construction Type:	Heating:	A/C:	Plumbing:	Fu
01	01	400	MULTI-USE SALES	FRAME	WOOD FRAME/JOIST/BEAM	NONE	NONE	NONE	2
B1	B1	1156	UNFIN RES BSMT	NONE	WOOD FRAME/JOIST/BEAM	NONE	NONE	NORMAL	3
01	01	1156	MULTI-USE OFFICE	FRAME	WOOD FRAME/JOIST/BEAM	HOT WATER/STEAM	NONE	NORMAL	3
02	02	850	MULTI-USE OFFICE	FRAME	WOOD FRAME/JOIST/BEAM	HOT WATER/STEAM	NONE	NORMAL	3

The information delivered through this on-line database is provided in the spirit of open access to government information and is intended as an enhanced service and convenience for citizens of Durham, CT. The providers of this database: Tyler CLT, Big Room Studios, and Durham, CT assume no liability for any error or omission in the information provided here.

Comments regarding this service should be directed to: jphilip@townofdurhamct.org



24 TOWN HOUSE ROAD


Durham, CT



August 11, 2022

1 inch = 564 Feet

www.cai-tech.com

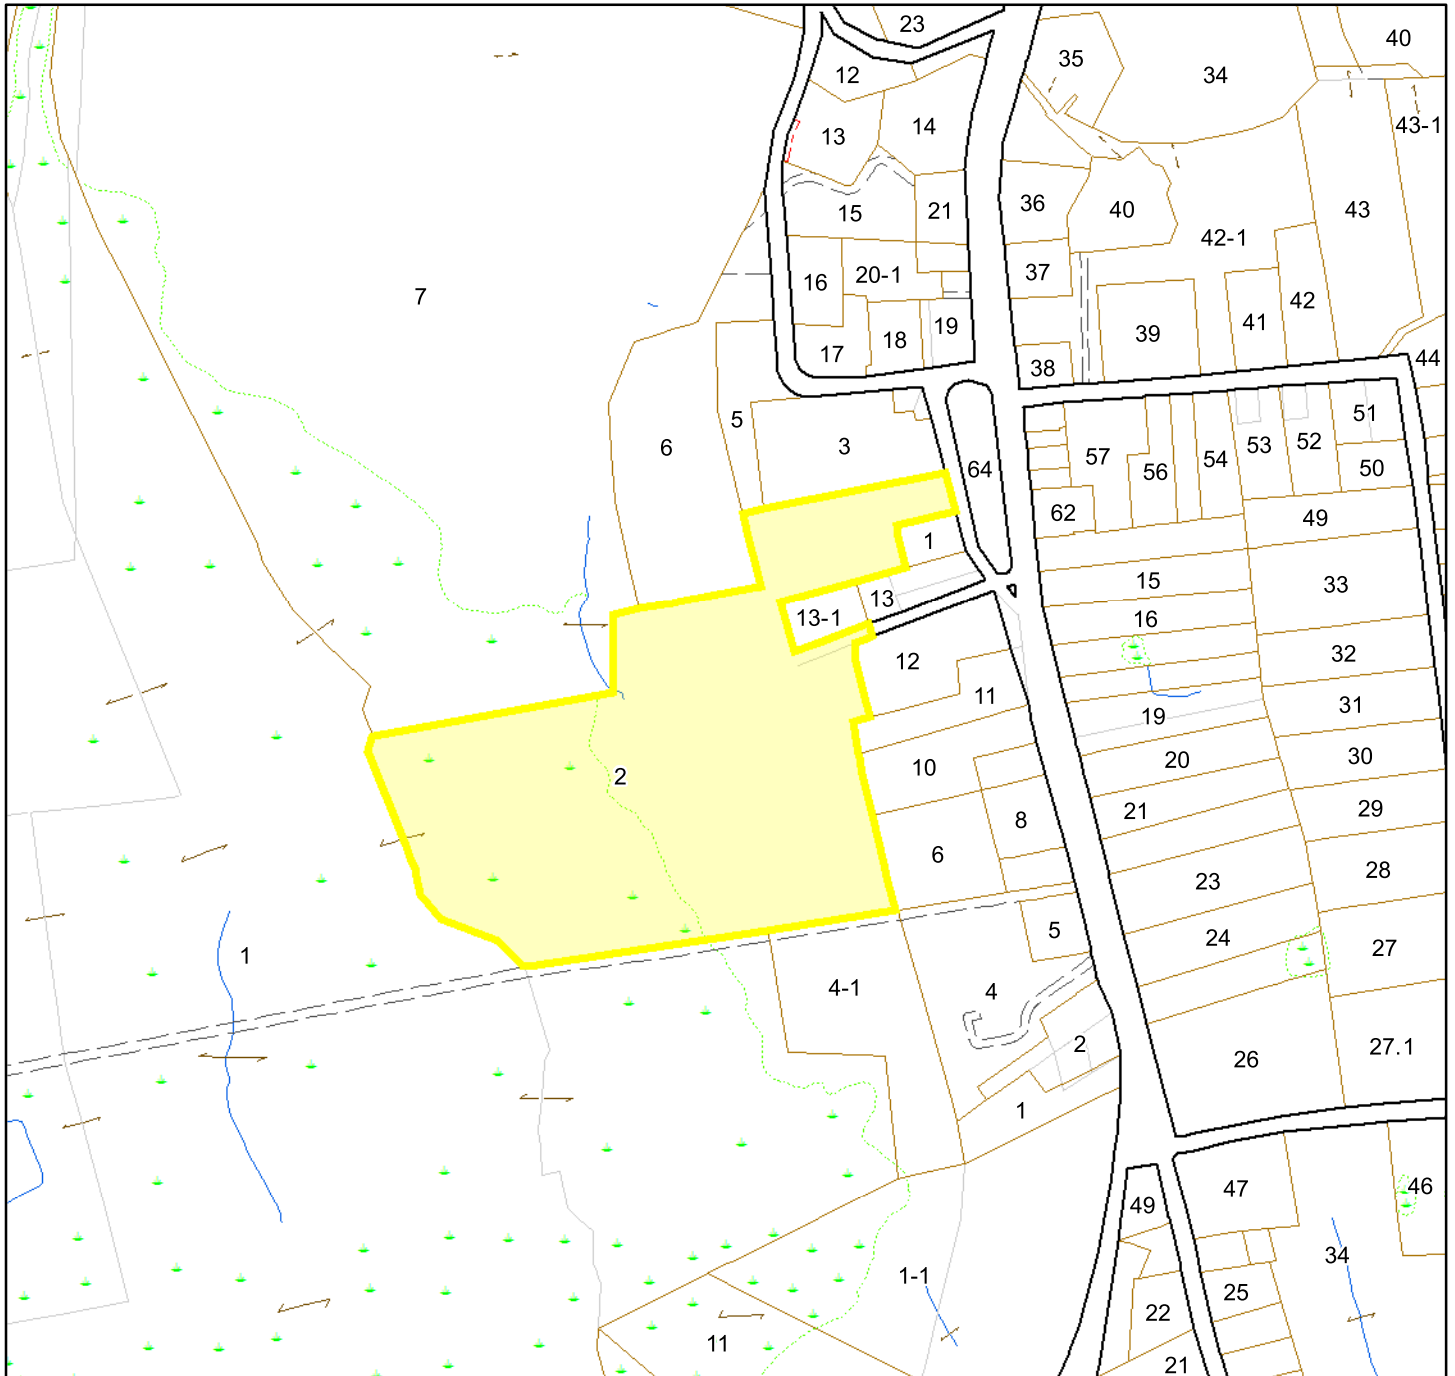

	Property Line		Utility		Wet Areas
	Public Road		Property Hook		
	Tract Line		Wetland		
	Right of Way		WaterLines		

Data shown on this map is provided for planning and informational purposes only. The municipality and CAI Technologies are not responsible for any use for other purposes or misuse or misrepresentation of this map.

From: [Daniel Miramant](#)
To: [Frank Kelley](#)
Cc: kterrill16@gmail.com
Subject: ATT Authorization
Date: Tuesday, May 9, 2023 9:26:05 AM

Frank per your request:

“This email authorizes AT&T Wireless and/or its authorized agent to file for all necessary federal, state or local permits and approvals for the proposed temporary wireless telecommunications facility located at The Durham Fairgrounds 24 Townhouse Road, Durham, CT ”

[Daniel Miramant](#)
[Vice President/Past President](#)
[Durham Agricultural Fair Association](#)
[860-559-2421](#)

Durham Fair 2022 Proposed AT&T Supercolt

Approximate Colt location to be fine tuned with Daniel on day of deployment.

Legend



43' Cable yellow jacket for power and fiber



Supercolt outline



Google earth

© 2016 Google



100 ft





WASH!
WASH!
WASH!

5141

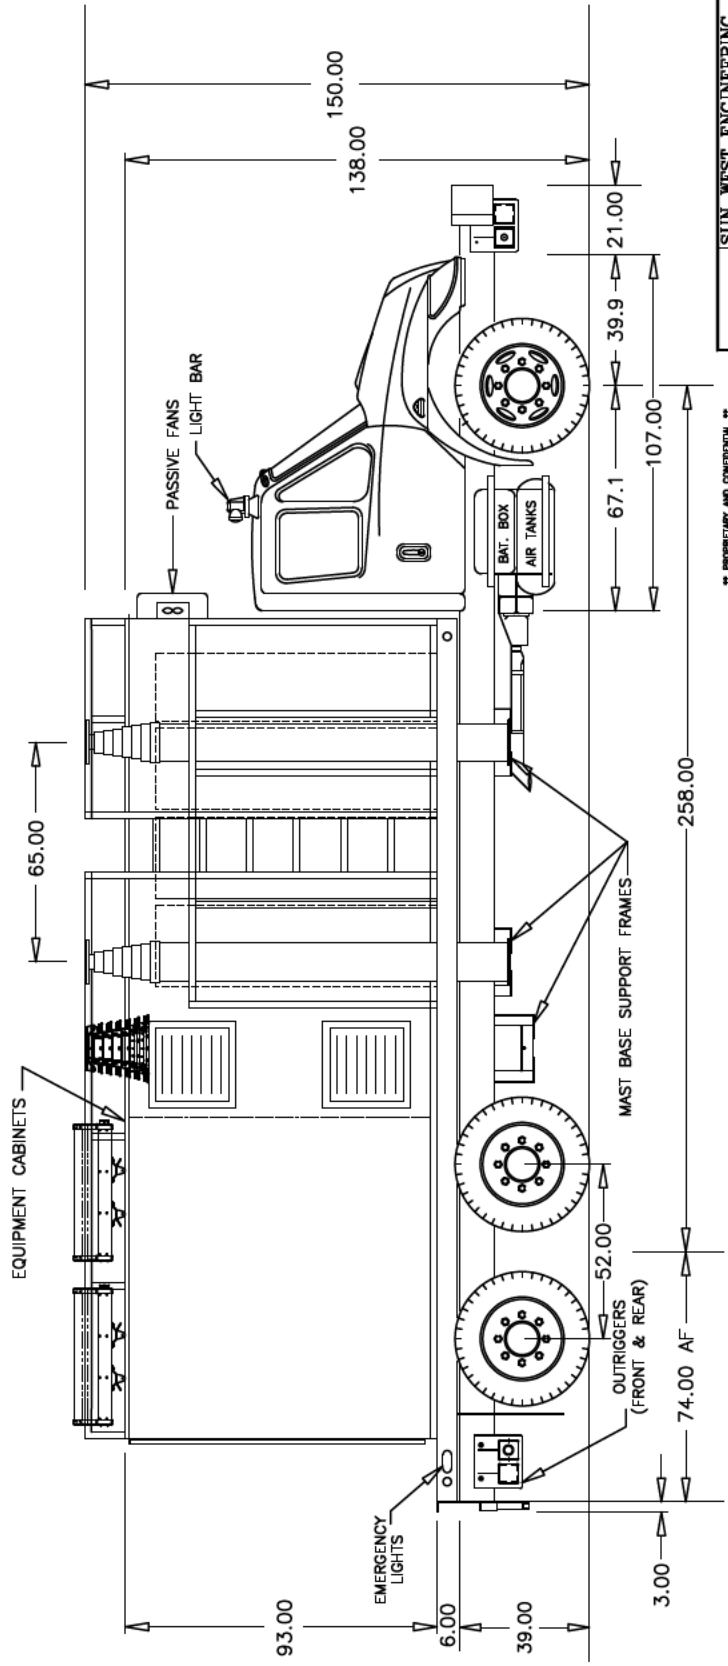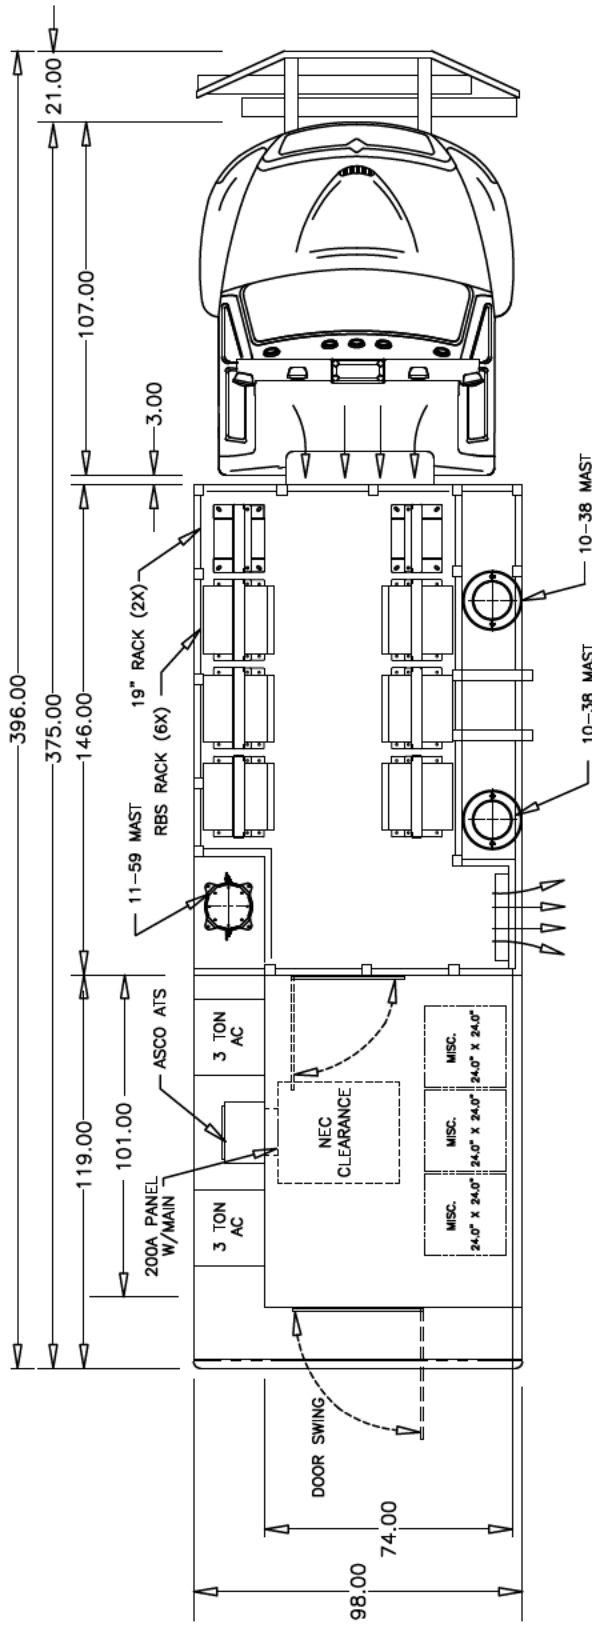

Copyright © 2008 by Sun West Engineering, Inc.
 ALL RIGHTS RESERVED. THIS DRAWING AND ALL INFORMATION CONTAINED HEREIN IS THE PROPERTY OF SUN WEST ENGINEERING, INC. AND IS TO BE USED FOR THE PROJECT AND SITE SPECIFIC INFORMATION ONLY. NO PART OF THIS DRAWING OR INFORMATION HEREIN ARE TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT LIMITATION OF THE DRAWING AND OTHER INFORMATION HEREIN, ARE THE SOLE AND EXCLUSIVE PROPERTY OF SUN WEST ENGINEERING, INC. ANY DUPLICATION, DISCLOSURE, OR USE OF ANY PORTION OF THIS DOCUMENT WITHOUT THE PRIOR WRITTEN PERMISSION OF SUN WEST ENGINEERING, INC. WILL BE CONSIDERED A VIOLATION OF THE LAW AND IS SUBJECT TO THE FULL EXTENT OF THE LAW.

SUN WEST ENGINEERING, INC.
 3000 S. INDEPENDENCE, PUEBLO, CO 81008
 TITLE: INTERNATIONAL (MODEL 4300)
 TRUCK "COW" W/ EQUIPMENT CABINET

Plot Scale: 3000=1
 SHEET: 1 of 1
 DRAWN BY: JZJ/JM
 DATE DRAWN: 3-3-16
 REVISED: 3-18-16
 DWG. No. SW-554-3R3



C Squared Systems, LLC
65 Dartmouth Drive
Auburn, NH 03032
(603) 644-2800
support@csquaredsystems.com

Calculated Radio Frequency Emissions Report



CT2301

24 Town House Road, Durham, CT 06422

May 30, 2023

Table of Contents

1. Introduction	2
2. FCC Guidelines for Evaluating RF Radiation Exposure Limits.....	2
3. RF Exposure Prediction Methods.....	3
4. Calculation Results	4
5. Conclusion.....	6
6. Statement of Certification.....	6
Attachment A: References	7
Attachment B: FCC Limits for Maximum Permissible Exposure (MPE)	8
Attachment C: AT&T Mobility Antenna Model Data Sheets and Electrical Patterns	10

List of Figures

Figure 1: Graph of General Population % MPE vs. Distance.....	4
Figure 2: Graph of FCC Limits for Maximum Permissible Exposure (MPE).....	9

List of Tables

Table 1: Maximum Percent of General Population Exposure Values	5
Table 2: FCC Limits for Maximum Permissible Exposure	8

1. Introduction

The purpose of this report is to investigate compliance with applicable FCC regulations for the proposed temporary deployment for Durham Fair of AT&T antenna arrays on top of the Mini Super COLT (Cell On Light Truck) at 35', 40', 45' and 50' AGL located at 24 Town House Road in Durham, CT. The coordinates of Super Colt are 41° 28' 12.51" N, 72° 40' 54.55" W.

AT&T is proposing the following:

- 1) Temporarily deploy multi-band antennas on its Mini Super Colt to support its commercial LTE network and the FirstNet National Public Safety Broadband Network ("NPSBN") during the Durham Fair celebration in Durham, CT.

This report considers the planned antenna configuration for AT&T¹ to derive the resulting % Maximum Permissible Exposure of its proposed temporary deployment.

2. FCC Guidelines for Evaluating RF Radiation Exposure Limits

In 1985, the FCC established rules to regulate radio frequency (RF) exposure from FCC licensed antenna facilities. In 1996, the FCC updated these rules, which were further amended in August 1997 by OET Bulletin 65 Edition 97-01. These new rules include Maximum Permissible Exposure (MPE) limits for transmitters operating between 300 kHz and 100 GHz. The FCC MPE limits are based upon those recommended by the National Council on Radiation Protection and Measurements (NCRP), developed by the Institute of Electrical and Electronics Engineers, Inc., (IEEE) and adopted by the American National Standards Institute (ANSI).

The FCC general population/uncontrolled limits set the maximum exposure to which most people may be subjected. General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

Public exposure to radio frequencies is regulated and enforced in units of milliwatts per square centimeter (mW/cm²). The general population exposure limits for the various frequency ranges are defined in the attached "FCC Limits for Maximum Permissible Exposure (MPE)" in Attachment C of this report.

Higher exposure limits are permitted under the occupational/controlled exposure category, but only for persons who are exposed as a consequence of their employment and who have been made fully aware of the potential for exposure, and they must be able to exercise control over their exposure. General population/uncontrolled limits are five times more stringent than the levels that are acceptable for occupational, or radio frequency trained individuals. Attachment C contains excerpts from OET Bulletin 65 and defines the Maximum Exposure Limit.

Finally, it should be noted that the MPE limits adopted by the FCC for both general population/uncontrolled exposure and for occupational/controlled exposure incorporate a substantial margin of safety and have been established to be well below levels generally accepted as having the potential to cause adverse health effects.

¹ As referenced to AT&T's Radio Frequency Design Sheet updated 04/25/2023.

3. RF Exposure Prediction Methods

The emission field calculation results displayed in the following figures were generated using the following formula as outlined in FCC bulletin OET 65:

$$\text{Power Density} = \left(\frac{GRF \times 1.64 \times ERP}{4\pi \times R^2} \right) \times \text{Off Beam Loss}$$

Where:

EIRP = Effective Isotropic Radiated Power

R = Radial Distance = $\sqrt{(H^2 + V^2)}$

H = Horizontal Distance from antenna in meters

V = Vertical Distance from radiation center of antenna in meters

Off Beam Loss is determined by the selected antenna patterns

Ground reflection factor of 1.6

These calculations assume that the antennas are operating at 100 percent capacity, that all antenna channels are transmitting simultaneously, and that the radio transmitters are operating at full power. Obstructions (trees, buildings, etc.) that would normally attenuate the signal are not taken into account. The calculations assume even terrain in the area of study and do not take into account actual terrain elevations which could attenuate the signal. As a result, the predicted signal levels reported below are much higher than the actual signal levels will be from the final installations.

4. Calculation Results

The calculated power density results are shown in Figure 1 below. For completeness, the calculations for this analysis range from 0 feet horizontal distance (directly below the antennas) to a value of 3,000 feet horizontal distance from the site. In addition to the other worst-case scenario considerations that were previously mentioned, the power density calculations to each horizontal distance point away from the antennas was completed using a local maximum off beam antenna gain (within ± 5 degrees of the true mathematical angle) to incorporate a realistic worst-case scenario.

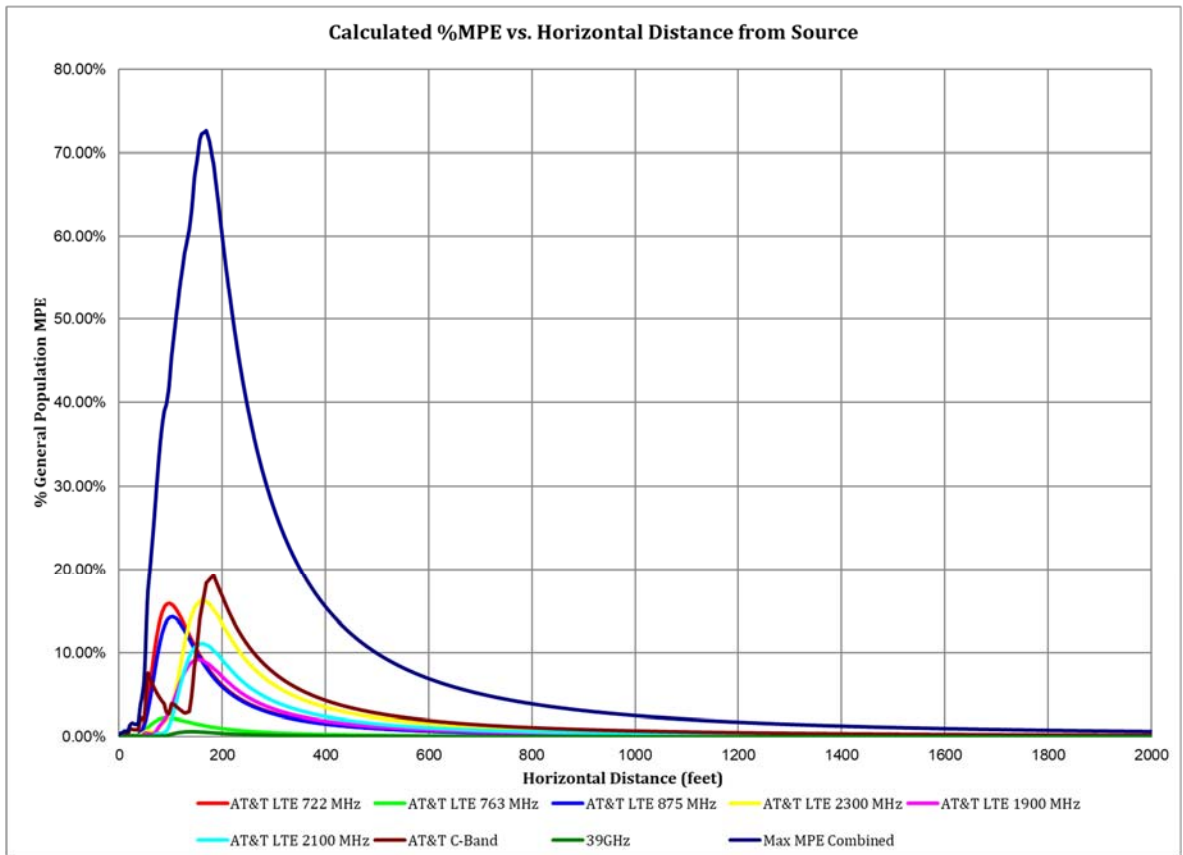


Figure 1: Graph of General Population % MPE vs. Distance

The highest percent of MPE (72.61% of the General Population limit) is calculated to occur at a horizontal distance of 169 feet from antennas. Please note that the percent of MPE calculations close to the site take into account off beam loss, which is determined from the vertical pattern of the antennas used. Therefore, RF power density levels may increase as the distance from the site increases. At distances of approximately 1500 feet and beyond, one would now be in the main beam of the antenna pattern and off beam loss is no longer considered. Beyond this point, RF levels become calculated solely on distance from the site and the percent of MPE decreases significantly as distance from the site increases.

Table 1 below lists percent of MPE values as well as the associated parameters that were included in the calculations. The highest percent of MPE value was calculated to occur at a horizontal distance of 169 feet from the site (reference Figure 1).

As stated in Section 3, all calculations assume that the antennas are operating at 100 percent capacity, that all antenna channels are transmitting simultaneously, and that the radio transmitters are operating at full power. Obstructions (trees, buildings etc.) that would normally attenuate the signal are not taken into account. In addition, a six-foot height offset was considered in this analysis to account for average human height. As a result, the predicted signal levels are significantly higher than the actual signal levels will be from the final configuration. The results presented in Figure 1 and Table 1 assume level ground elevation from the base of the tower out to the horizontal distances calculated.

Carrier	Number of Transmitters	Power out of Base Station Per Transmitter (Watts)	Antenna Height (Feet)	Distance to the Base of Antennas (Feet)	Power Density (mW/cm ²)	Limit (mW/cm ²)	% MPE
39GHz	1	1.0	35.0	169	0.005280	1.000	0.53%
AT&T C-Band	1	86.5	45.0	169	0.183313	1.000	18.33%
AT&T LTE 1900 MHz	1	80.0	40.0	169	0.088121	1.000	8.81%
AT&T LTE 2100 MHz	1	80.0	40.0	169	0.109447	1.000	10.94%
AT&T LTE 2300 MHz	1	100.0	40.0	169	0.160459	1.000	16.05%
AT&T LTE 722 MHz	1	80.0	40.0	169	0.040734	0.481	8.46%
AT&T LTE 763 MHz	1	80.0	50.0	169	0.006515	0.509	1.28%
AT&T LTE 875 MHz	1	80.0	40.0	169	0.047859	0.583	8.20%
						Total	72.61%

Table 1: Maximum Percent of General Population Exposure Values

5. Conclusion

The above analysis verifies that RF exposure levels from the site with AT&T's proposed antenna configuration will be well below the maximum permissible levels as outlined by the FCC in the OET Bulletin 65 Ed. 97-01. Using the conservative calculation methods and parameters detailed above, the maximum cumulative percent of MPE in consideration of all transmitters is calculated to be **72.61% of the FCC limit (General Population/Uncontrolled)**. This maximum cumulative percent of MPE value is calculated to occur 169 feet away from the site.

6. Statement of Certification

I certify to the best of my knowledge that the statements in this report are true and accurate. The calculations follow guidelines set forth in ANSI/IEEE Std. C95.3, ANSI/IEEE Std. C95.1 and FCC OET Bulletin 65 Edition 97-01.




Report Prepared By:

Ram Acharya
RF Engineer 1
C Squared Systems, LLC

May 26, 2023

Date



Reviewed/Approved By:

Martin J. Lavin
Senior RF Engineer
C Squared Systems, LLC

May 30, 2023

Date

Attachment A: References

OET Bulletin 65 - Edition 97-01 - August 1997 Federal Communications Commission Office of Engineering & Technology

IEEE C95.1-2005, IEEE Standard Safety Levels With Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz IEEE-SA Standards Board

IEEE C95.3-2002 (R2008), IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to Such Fields, 100 kHz-300 GHz IEEE-SA Standards Board

Attachment B: FCC Limits for Maximum Permissible Exposure (MPE)

(A) Limits for Occupational/Controlled Exposure²				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (E) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f ²)*	6
30-300	61.4	0.163	1.0	6
300-1500	-	-	f/300	6
1500-100,000	-	-	5	6

(B) Limits for General Population/Uncontrolled Exposure³				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (E) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	f/1500	30
1500-100,000	-	-	1.0	30

f = frequency in MHz * Plane-wave equivalent power density

Table 2: FCC Limits for Maximum Permissible Exposure

² Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

³ General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

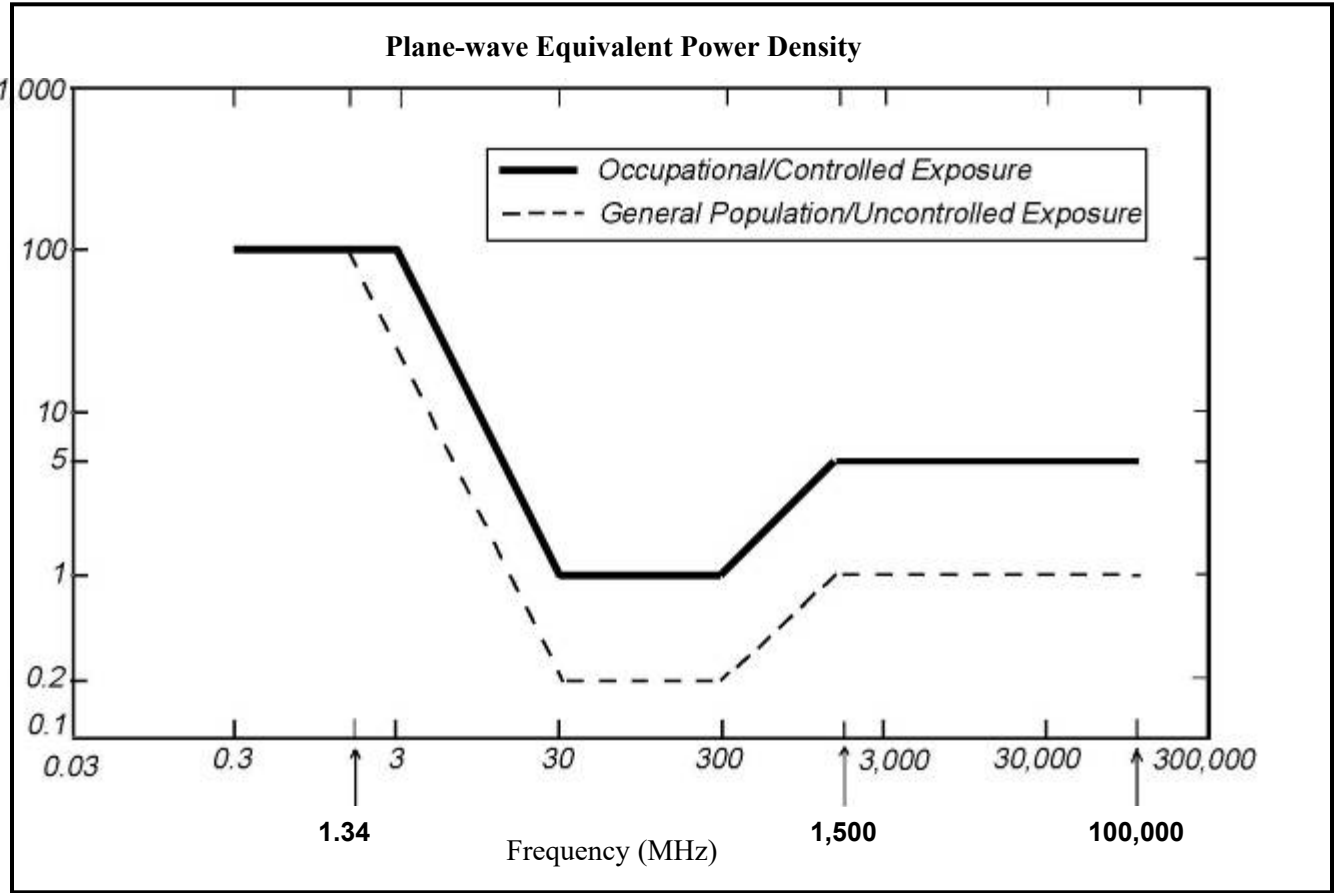
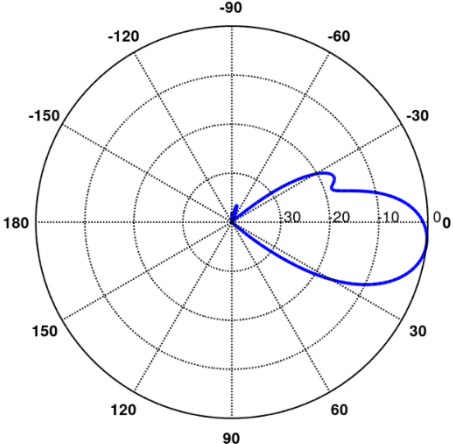
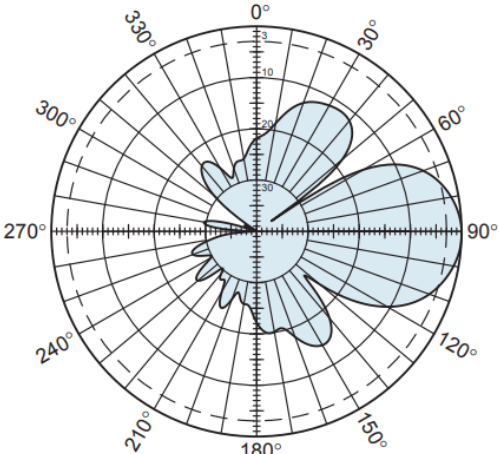
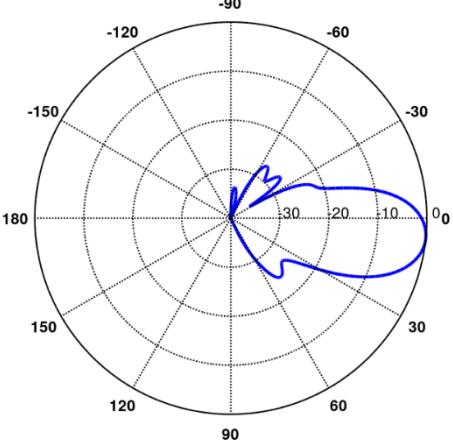
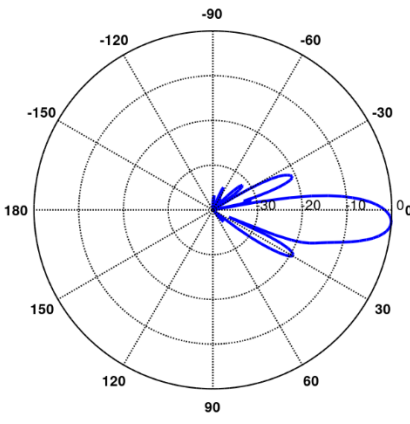
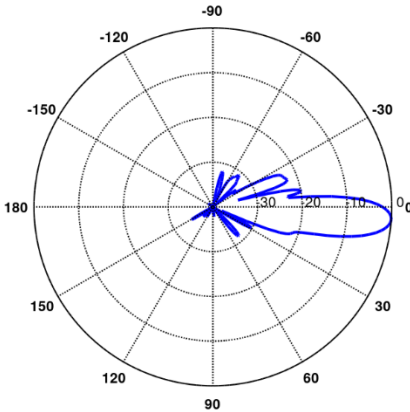
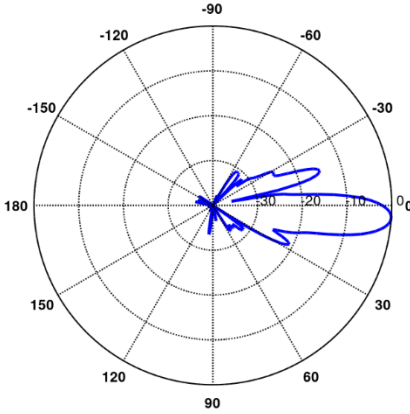


Figure 2: Graph of FCC Limits for Maximum Permissible Exposure (MPE)

Attachment C: AT&T Mobility Antenna Model Data Sheets and Electrical Patterns


<p>700 MHz</p> <p>Manufacturer: CCI Model #: MBA10-6F-BU-H3 Frequency Band: 698-806 MHz Gain: 19 dBi Vertical Beamwidth: $5 \times 11.6^\circ$ Horizontal Beamwidth: 22.2° Polarization: Dual Linear $\pm 45^\circ$ Size L x W x D: 40.8" x 83" x 11.3"</p>	
<p>700 MHz</p> <p>Manufacturer: Katherin Model #: 840-10520 Frequency Band: 698-894 MHz Gain: 10.8 dBi Vertical Beamwidth: 36° Horizontal Beamwidth: 72° Polarization: $\pm 45^\circ$ Size L x W x D: 23.5" x 10.3" x 5.9"</p>	
<p>850 MHz</p> <p>Manufacturer: CCI Model #: MBA10-6F-BU-H3 Frequency Band: 824-896 MHz Gain: 19.7 dBi Vertical Beamwidth: $5 \times 9.9^\circ$ Horizontal Beamwidth: 19.7° Polarization: Dual Linear $\pm 45^\circ$ Size L x W x D: 40.8" x 83" x 11.3"</p>	

<p>1850-1990 MHz</p> <p>Manufacturer: CCI Model #: MBA10-6F-BU-H3 Frequency Band: 1850-1990 MHz Gain: 23.9 dBi Vertical Beamwidth: 10 x 5.3° Horizontal Beamwidth: 11.4° Polarization: Dual Linear 45° Size L x W x D: 40.8" x 83.0" x 11.3"</p>	
<p>2110-2180 MHz</p> <p>Manufacturer: CCI Model #: MBA10-6F-BU-H3 Frequency Band: 2110-2180 MHz Gain: 24.4 dBi Vertical Beamwidth: 10 x 4.6° Horizontal Beamwidth: 10.3° Polarization: Dual Linear 45° Size L x W x D: 40.8" x 83.0" x 11.3"</p>	
<p>2305-2360 MHz</p> <p>Manufacturer: CCI Model #: MBA10-6F-BU-H3 Frequency Band: 2305-2360 MHz Gain: 24.5 dBi Vertical Beamwidth: 10 x 4.2° Horizontal Beamwidth: 9.6° Polarization: Dual Linear 45° Size L x W x D: 40.8" x 83.0" x 11.3"</p>	

USPS TRACKING #

9405 5036 9930 0562 3466 76

Electronic Rate Approved #038555749

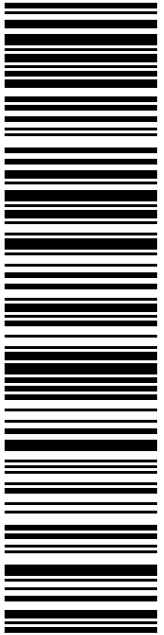

USPS TRACKING #

R003

USPS TRACKING #

9405 5036 9930 0562 3466 76

Electronic Rate Approved #038555749

USPS TRACKING #

R003

USPS TRACKING #

9405 5036 9930 0562 3466 76

Electronic Rate Approved #038555749



Cut on dotted line.

Instructions

1. Each Click-N-Ship® label is unique. Labels are to be used as printed and used only once. **DO NOT PHOTO COPY OR ALTER LABEL.**
2. Place your label so it does not wrap around the edge of the package.
3. Adhere your label to the package. A self-adhesive label is recommended. If tape or glue is used, **DO NOT TAPE OVER BARCODE.** Be sure all edges are secure.
4. To mail your package with PC Postage®, you may schedule a Package Pickup online, hand to your letter carrier, take to a Post Office™, or drop in a USPS collection box.
5. Mail your package on the "Ship Date" you selected when creating this label.

Click-N-Ship® Label Record

USPS TRACKING # :
9405 5036 9930 0562 3466 76

Trans. #: 590193163	Priority Mail® Postage: \$9.65
Print Date: 06/15/2023	Total: \$9.65
Ship Date: 06/16/2023	
Expected Delivery Date: 06/20/2023	

From: QC DEVELOPMENT
5900 BALCONES DR STE 8148
AUSTIN TX 78731-4257


To: GEORGE EAMES
TOWN OF DURHAM
CC: DICK MCMANUS
30 TOWN HOUSE RD
DURHAM CT 06422-2118

* Retail Pricing Priority Mail rates apply. There is no fee for USPS Tracking® service on Priority Mail service with use of this electronic rate shipping label. Refunds for unused postage paid labels can be requested online 30 days from the print date.



Thank you for shipping with the United States Postal Service!

Check the status of your shipment on the USPS Tracking® page at usps.com

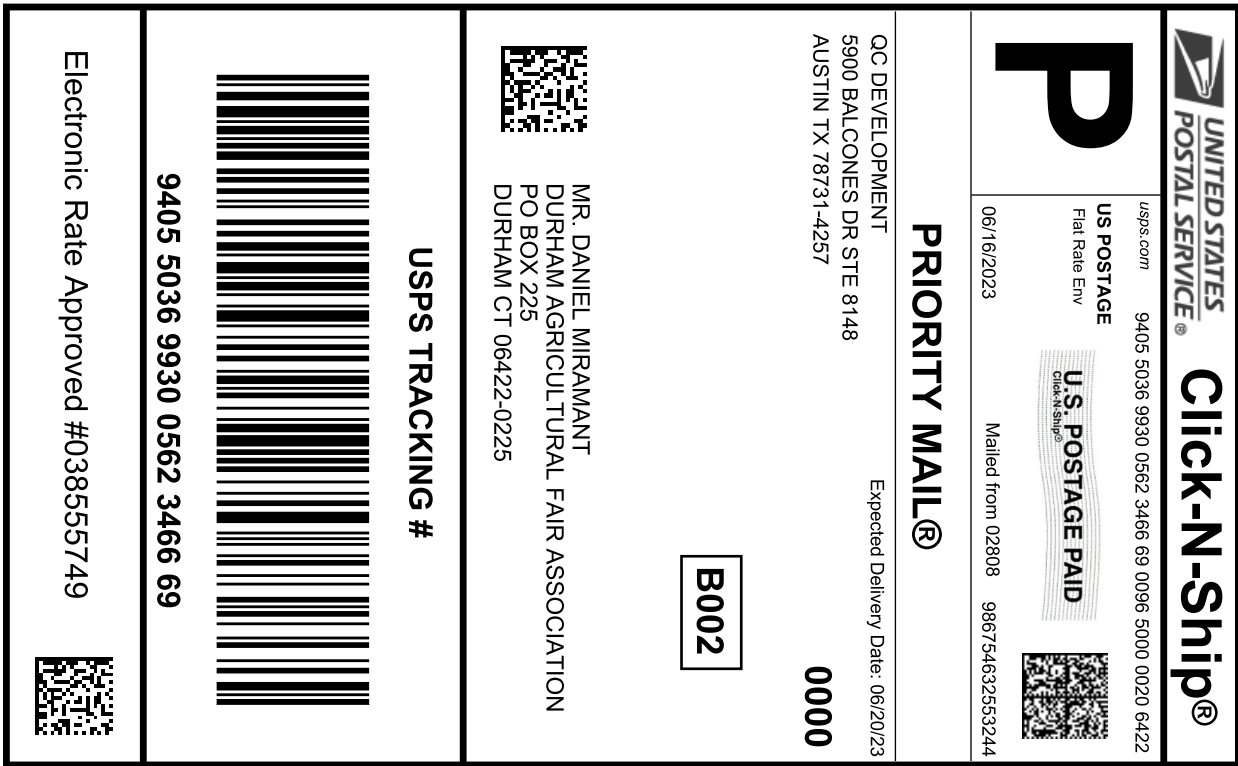

Cut on dotted line.

Instructions

1. Each Click-N-Ship® label is unique. Labels are to be used as printed and used only once. DO NOT PHOTO COPY OR ALTER LABEL.
2. Place your label so it does not wrap around the edge of the package.
3. Adhere your label to the package. A self-adhesive label is recommended. If tape or glue is used, DO NOT TAPE OVER BARCODE. Be sure all edges are secure.
4. To mail your package with PC Postage®, you may schedule a Package Pickup online, hand to your letter carrier, take to a Post Office™, or drop in a USPS collection box.
5. Mail your package on the "Ship Date" you selected when creating this label.

Click-N-Ship® Label Record

USPS TRACKING # :	
9405 5036 9930 0562 3466 69	
Trans. #:	590193163
Print Date:	06/15/2023
Ship Date:	06/16/2023
Expected Delivery Date:	06/20/2023
Priority Mail® Postage:	\$9.65
Total:	\$9.65
From: QC DEVELOPMENT 5900 BALCONES DR STE 8148 AUSTIN TX 78731-4257	
To: MR. DANIEL MIRAMANT DURHAM AGRICULTURAL FAIR ASSOCIATION PO BOX 225 DURHAM CT 06422-0225	
<small>* Retail Pricing Priority Mail rates apply. There is no fee for USPS Tracking® service on Priority Mail service with use of this electronic rate shipping label. Refunds for unused postage paid labels can be requested online 30 days from the print date.</small>	



Thank you for shipping with the United States Postal Service!

Check the status of your shipment on the USPS Tracking® page at usps.com

Tracking Number:

Remove X

9405503699300562346676

Copy

Add to Informed Delivery (<https://informedelivery.usps.com/>)

Expected Delivery by

TUESDAY

20 June 2023 ⓘ by **9:00pm** ⓘ

Your item arrived at our USPS facility in SPRINGFIELD MA NETWORK DISTRIBUTION CENTER on June 17, 2023 at 5:40 am. The item is currently in transit to the destination.

Feedback

Get More Out of USPS Tracking:

USPS Tracking Plus[®]

Delivered

Out for Delivery

Preparing for Delivery

Moving Through Network

Arrived at USPS Regional Facility

SPRINGFIELD MA NETWORK DISTRIBUTION CENTER

June 17, 2023, 5:40 am

Departed USPS Facility

CHICOPEE, MA 01022

June 17, 2023, 4:52 am

See All Tracking History

Tracking Number:

Remove X

9405503699300562346669

Copy

Add to Informed Delivery (<https://informedelivery.usps.com/>)

Expected Delivery by

TUESDAY

20

June
2023 ⓘ

by

9:00pm ⓘ

Your item arrived at our USPS facility in SOUTHERN CT DISTRIBUTION CENTER on June 18, 2023 at 4:15 am. The item is currently in transit to the destination.

Feedback

Get More Out of USPS Tracking:

USPS Tracking Plus[®]

Delivered

Out for Delivery

Preparing for Delivery

Moving Through Network

Arrived at USPS Regional Facility

SOUTHERN CT DISTRIBUTION CENTER

June 18, 2023, 4:15 am

Departed USPS Regional Facility

SPRINGFIELD MA NETWORK DISTRIBUTION CENTER

June 18, 2023, 3:11 am

See All Tracking History