



STATE OF CONNECTICUT  
CONNECTICUT SITING COUNCIL

Ten Franklin Square, New Britain, CT 06051

Phone: (860) 827-2935 Fax: (860) 827-2950

E-Mail: [siting.council@ct.gov](mailto:siting.council@ct.gov)

[www.ct.gov/csc](http://www.ct.gov/csc)

April 9, 2013

Kenneth C. Baldwin, Esq.  
Robinson & Cole  
280 Trumbull Street  
Hartford, CT 06103-3597

RE: **EM-VER-041-130314** - Cellco Partnership d/b/a Verizon Wireless notice of intent to modify an existing telecommunications facility located at 33 Neptune Avenue, East Haddam, Connecticut.

Dear Attorney Baldwin:

The Connecticut Siting Council (Council) hereby acknowledges your notice to modify this existing telecommunications facility, pursuant to Section 16-50j-73 of the Regulations of Connecticut State Agencies with the following conditions:

- Any deviation from the proposed modification as specified in this notice and supporting materials with Council shall render this acknowledgement invalid;
- Any material changes to this modification as proposed shall require the filing of a new notice with the Council;
- Within 45 days after completion of construction, the Council shall be notified in writing that construction has been completed;
- The validity of this action shall expire one year from the date of this letter; and
- The applicant may file a request for an extension of time beyond the one year deadline provided that such request is submitted to the Council not less than 60 days prior to the expiration;

The proposed modifications including the placement of all necessary equipment and shelters within the tower compound are to be implemented as specified here and in your notice dated March 12, 2013. The modifications are in compliance with the exception criteria in Section 16-50j-72 (b) of the Regulations of Connecticut State Agencies as changes to an existing facility site that would not increase tower height, extend the boundaries of the tower site, increase noise levels at the tower site boundary by six decibels, and increase the total radio frequencies electromagnetic radiation power density measured at the tower site boundary to or above the standard adopted by the State Department of Environmental Protection pursuant to General Statutes § 22a-162. This facility has also been carefully modeled to ensure that radio frequency emissions are conservatively below State and federal standards applicable to the frequencies now used on this tower.

This decision is under the exclusive jurisdiction of the Council. Please be advised that the validity of this action shall expire one year from the date of this letter. Any additional change to this facility will require explicit notice to this agency pursuant to Regulations of Connecticut State Agencies Section 16-50j-73. Such notice shall include all relevant information regarding the proposed change with cumulative worst-case modeling of radio frequency exposure at the closest point of uncontrolled access to the tower base, consistent with Federal Communications Commission, Office of Engineering and Technology, Bulletin 65. Thank you for your attention and cooperation.

Very truly yours,

Linda Roberts  
Executive Director

LR/CDM/jb

c: The Honorable Mark B. Walter, First Selectman, Town of East Haddam  
Crary H. Brownell, Chm, Planning and Zoning Comm, Town of East Haddam  
Christopher B. Fisher, Esq., AT&T



280 Trumbull Street  
Hartford, CT 06103-3597  
Main (860) 275-8200  
Fax (860) 275-8299  
kbaldwin@rc.com  
Direct (860) 275-8345

Also admitted in Massachusetts

ORIGINAL

February 27, 2014

RECEIVED  
MAR - 3 2014  
CONNECTICUT  
SITING COUNCIL

Melanie A. Bachman  
Acting Executive Director  
Connecticut Siting Council  
10 Franklin Square  
New Britain, CT 06051

Re: **EM-VER-041-130314 – 33 Neptune Avenue, East Haddam, Connecticut  
Completion of Construction Activity**

Dear Ms. Bachman:

The purpose of this letter is to notify the Siting Council that construction activity associated with the above-referenced Cellco Partnership d/b/a Verizon Wireless telecommunications facility has been completed.

If you have any questions or need any additional information regarding this facility please do not hesitate to contact me.

Sincerely,

  
Kenneth C. Baldwin



Law Offices

BOSTON

PROVIDENCE

HARTFORD

NEW LONDON

STAMFORD

WHITE PLAINS

NEW YORK CITY

ALBANY

SARASOTA


www.rc.com

Copy to:  
Sandy M. Carter

280 Trumbull Street  
 Hartford, CT 06103-3597  
 Main (860) 275-8200  
 Fax (860) 275-8299  
 kbaldwin@rc.com  
 Direct (860) 275-8345

Also admitted in Massachusetts

March 12, 2013

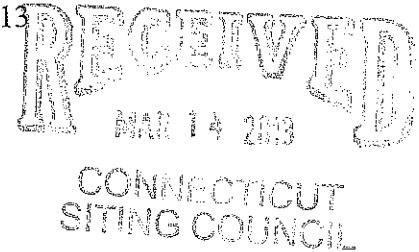

Linda Roberts  
 Executive Director  
 Connecticut Siting Council  
 10 Franklin Square  
 New Britain, CT 06051

Re: **Notice of Exempt Modification – Revised Antenna Configuration  
 33 Neptune Avenue, East Haddam, Connecticut**

Dear Ms. Roberts:

On November 5, 2010, the Connecticut Siting Council (the “Council”) approved Petition No. 956, a request by Cellco Partnership d/b/a Verizon Wireless (“Cellco”) to replace an existing 70-foot light pole with a 90-foot light pole telecommunications facility at 33 Neptune Avenue in East Haddam. The Council approved the installation of fifteen (15) antennas at the top of the light pole. Cellco expects to commence construction of this facility on or about July 1, 2013.

Since receiving Council approval in Petition No. 956, Cellco has decided to change its antenna configuration and install only twelve (12) antennas at the 90-foot level on the replacement pole, including three (3) model BXA-70063-6CF cellular antennas; three (3) model BXA-171063-12CF PCS antennas; three (3) model BXA-70063-6CF LTE antennas; and three (3) model BXA-171063-12CF AWS antennas. Cellco also intends to install six (6) remote radio heads (“RRHs”) behind its antennas and two (2) HYBRIFLEX™ fiber cables inside the monopole. Attached behind Tab 1 are the specifications for the new antennas, RRHs and HYBRIFLEX™ cables.

Please accept this letter as notification pursuant to R.C.S.A. § 16-50j-73, for construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-72(b)(2). In accordance with R.C.S.A. § 16-50j-73, a copy of this letter is being sent to Mark B. Walter, First Selectman for the Town of East Haddam. A copy of this letter is being sent to the American Legion Post No. 156, the owner of the property on which the replacement light pole will be located.



*Law Offices*

BOSTON

PROVIDENCE

HARTFORD

NEW LONDON

STAMFORD

WHITE PLAINS

NEW YORK CITY

ALBANY

SARASOTA

*www.rc.com*

12124444-v1

# ROBINSON & COLE<sup>LLP</sup>

Linda Roberts  
March 12, 2013  
Page 2

The planned modifications to the facility fall squarely within those activities explicitly provided for in R.C.S.A. § 16-50j-72(b)(2).

1. The revised antenna configuration will not result in an increase in the height of the approved replacement light pole. Cellco's antennas and RRHs will be located at the same 90-foot level.

2. The revised antenna configuration will not involve any change to ground-mounted equipment and, therefore, will not require the extension of the site boundary.

3. The revised antenna configuration will not increase noise levels at the facility by six decibels or more, or to levels that exceed state and local criteria.


4. The operation of the revised antenna configuration will not increase radio frequency (RF) emissions at the facility to a level at or above the Federal Communications Commission (FCC) adopted safety standard. A General Power Density table for Cellco's modified facility is included behind Tab 2.

5. The revised antenna configuration will not cause a change or alteration in the physical or environmental characteristics of the site.

6. The tower and its foundation, as designed and approved, can support Cellco's proposed antennas, RRHs and related equipment described in this filing.

For the foregoing reasons, Cellco respectfully submits that the revised antenna configuration at the above-referenced telecommunications facility constitutes an exempt modification under R.C.S.A. § 16-50j-72(b)(2).

Sincerely,



Kenneth C. Baldwin

Enclosures  
Copy to:

Mark B. Walter, East Haddam First Selectman  
American Legion Post No. 156  
Sandy M. Carter



**BXA-70063-6CF-EDIN-X**

X-Pol | FET Panel | 63° | 14.5 dBd


Replace "X" with desired electrical downtilt

Antenna is also available with NE connector(s). Replace "EDIN" with "NE" in the model number when ordering.

Electrical Characteristics	696-900 MHz		
Frequency bands	696-806 MHz	806-900 MHz	
Polarization	±45°		
Horizontal beamwidth	65°	63°	
Vertical beamwidth	13°	11°	
Gain	14.0 dBd (16.1 dBi)	14.5 dBd (16.6 dBi)	
Electrical downtilt (X)	0, 2, 3, 4, 5, 6, 8, 10		
Impedance	50Ω		
VSWR	≤1.35:1		
Upper sidelobe suppression (0°)	-18.3 dB	-18.2 dB	
Front-to-back ratio (+/-30°)	-33.4 dB	-36.3 dB	
Null fill	5% (-26.02 dB)		
Isolation between ports	< -25 dB		
Input power with EDIN connectors	500 W		
Input power with NE connectors	300 W		
Lightning protection	Direct Ground		
Connector(s)	2 Ports / EDIN or NE / Female / Center (Back)		
Mechanical Characteristics			
Dimensions Length x Width x Depth	1804 x 285 x 132 mm	71.0 x 11.2 x 5.2 in	
Depth with z-brackets	172 mm	6.8 in	
Weight without mounting brackets	7.9 kg	17 lbs	
Survival wind speed	> 201 km/hr		
Wind area	Front: 0.51 m <sup>2</sup> Side: 0.24 m <sup>2</sup>	Front: 5.5 ft <sup>2</sup> Side: 2.6 ft <sup>2</sup>	
Wind load @ 161 km/hr (100 mph)	Front: 759 N Side: 391 N	Front: 169 lbf Side: 89 lbf	
Mounting Options	Part Number	Fits Pipe Diameter	Weight
3-Point Mounting & Downtilt Bracket Kit	36210008	40-115 mm 1.57-4.5 in	6.9 kg 15.2 lbs
Concealment Configurations	For concealment configurations, order BXA-70063-6CF-EDIN-X-FP		




BXA-70063-6CF-EDIN-X




Horizontal | 750 MHz

BXA-70063-6CF-EDIN-0

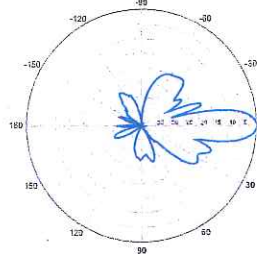


0° | Vertical | 750 MHz


BXA-70063-6CF-EDIN-2




2° | Vertical | 750 MHz



Horizontal | 850 MHz



0° | Vertical | 850 MHz




2° | Vertical | 850 MHz

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

**BXA-70063-6CF-EDIN-X**


X-Pol | FET Panel | 63° | 14.5 dBd

**BXA-70063-6CF-EDIN-3**




3° | Vertical | 750 MHz

**BXA-70063-6CF-EDIN-4**




4° | Vertical | 750 MHz


**BXA-70063-6CF-EDIN-5**




5° | Vertical | 750 MHz



3° | Vertical | 850 MHz




4° | Vertical | 850 MHz




5° | Vertical | 850 MHz

**BXA-70063-6CF-EDIN-6**




6° | Vertical | 750 MHz

**BXA-70063-6CF-EDIN-8**




8° | Vertical | 750 MHz


**BXA-70063-6CF-EDIN-10**




10° | Vertical | 750 MHz



6° | Vertical | 850 MHz



8° | Vertical | 850 MHz



10° | Vertical | 850 MHz

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

## BXA-171063-12CF-EDIN-X

X-Pol | FET Panel | 63° | 19.0 dBi


Replace "X" with desired electrical downtilt.

Antenna is also available with NE connector(s). Replace "EDIN" with "NE" in the model number when ordering.




Electrical Characteristics	1710-2170 MHz			
	1710-1880 MHz	1850-1990 MHz	1920-2170 MHz	
Frequency bands	1710-1880 MHz	1850-1990 MHz	1920-2170 MHz	
Polarization	±45°	±45°	±45°	
Horizontal beamwidth	68°	65°	60°	
Vertical beamwidth	4.5°	4.5°	4.5°	
Gain	16.1 dBd / 18.2 dBi	16.5 dBd / 18.6 dBi	16.9 dBd / 19.0 dBi	
Electrical downtilt (X)	0, 2, 5			
Impedance	50Ω			
VSWR	≤1.5:1			
First upper sidelobe	< -17 dB			
Front-to-back ratio	> 30 dB			
In-band isolation	> 28 dB			
IM3 (20W carrier)	< -150 dBc			
Input power	300 W			
Lightning protection	Direct Ground			
Connector(s)	2 Ports / EDIN or NE / Female / Center (Back)			
Operating temperature	-40° to +60° C / -40° to +140° F			
Mechanical Characteristics				
Dimensions Length x Width x Depth	1842 x 154 x 105 mm	72.5 x 6.1 x 4.1 in		
Depth with z-brackets	133 mm	5.2 in		
Weight without mounting brackets	5.8 kg	12.8 lbs		
Survival wind speed	> 201 km/hr		> 125 mph	
Wind area	Front: 0.28 m <sup>2</sup> Side: 0.19 m <sup>2</sup>	Front: 3.1 ft <sup>2</sup> Side: 2.1 ft <sup>2</sup>		
Wind load @ 161 km/hr (100 mph)	Front: 460 N Side: 304 N	Front: 103 lbf Side: 68 lbf		
Mounting Options	Part Number	Fits Pipe Diameter		Weight
2-Point Mounting Bracket Kit	26799997	50-102 mm	2.0-4.0 in	2.3 kg 5 lbs
2-Point Mounting & Downtilt Bracket Kit	26799999	50-102 mm	2.0-4.0 in	3.6 kg 8 lbs
Concealment Configurations	For concealment configurations, order BXA-171063-12CF-EDIN-X-FP			

BXA-171063-12CF-EDIN-X




Horizontal | 1710-1880 MHz  
BXA-171063-12CF-EDIN-0




0° | Vertical | 1710-1880 MHz

BXA-171063-12CF-EDIN-X




Horizontal | 1850-1990 MHz  
BXA-171063-12CF-EDIN-0




0° | Vertical | 1850-1990 MHz

BXA-171063-12CF-EDIN-X



Horizontal | 1920-2170 MHz  
BXA-171063-12CF-EDIN-0




0° | Vertical | 1920-2170 MHz

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

### BXA-171063-12CF-EDIN-X


X-Pol | FET Panel | 63° | 19.0 dBi

**BXA-171063-12CF-EDIN-2**

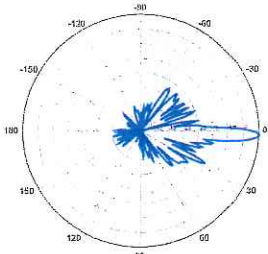


2° | Vertical | 1710-1880 MHz

**BXA-171063-12CF-EDIN-5**




5° | Vertical | 1710-1880 MHz

**BXA-171063-12CF-EDIN-2**




2° | Vertical | 1850-1990 MHz

**BXA-171063-12CF-EDIN-5**




5° | Vertical | 1850-1990 MHz

**BXA-171063-12CF-EDIN-2**



2° | Vertical | 1920-2170 MHz

**BXA-171063-12CF-EDIN-5**



5° | Vertical | 1920-2170 MHz


Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.



## Alcatel-Lucent RRH2x40-AWS

### REMOTE RADIO HEAD

The Alcatel-Lucent RRH2x40-AWS is a high-power, small form-factor Remote Radio Head (RRH) operating in the AWS frequency band (1700/2100MHz - 3GPP Band 4). The Alcatel-Lucent RRH2x40-AWS is designed with an eco-efficient approach, providing operators with the means to achieve high quality and capacity coverage with minimum site requirements.

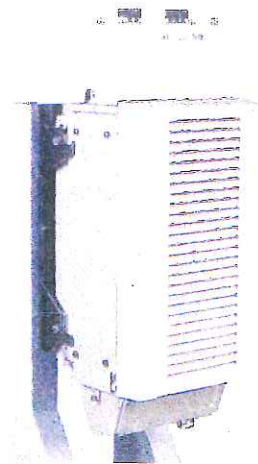

A distributed eNodeB expands deployment options by using two components, a Base Band Unit (BBU) containing the digital assets and a separate RRH containing the radio-frequency (RF) elements. This modular design optimizes available space and allows the main components of an eNodeB to be installed separately, within the same site or several kilometres apart.

The Alcatel-Lucent RRH2x40-AWS is linked to the BBU by an optical-fiber connection carrying downlink and uplink digital radio signals along with operations, administration and maintenance (OA&M) information. The Alcatel-Lucent RRH2x40-AWS has two transmit RF paths, 40 W RF output power per transmit path, and is designed to manage up to four-way receive diversity. The device is ideally suited to support macro coverage, with multiple-input multiple-output (MIMO) 2x2 operation in up to 20 MHz of bandwidth.

The Alcatel-Lucent RRH2x40-AWS is designed to make available all the benefits of a distributed eNodeB, with excellent RF characteristics, with low

capital expenditures (CAPEX) and low operating expenditures (OPEX). The limited space available in some sites may prevent the installation of traditional single-cabinet BTS equipment or require costly cranes to be employed, leaving coverage holes. However, many of these sites can host an Alcatel-Lucent RRH2x40-AWS installation, providing more flexible site selection and improved network quality along with greatly reduced installation time and costs.

#### Fast, low-cost installation and deployment

The Alcatel-Lucent RRH2x40-AWS is a zero-footprint solution and operates noise-free, simplifying negotiations with site property owners and minimizing environmental impacts. Installation can easily be done by a single person because the Alcatel-Lucent RRH2x40-AWS is compact and weighs less than 20 kg (44 lb), eliminating the need for a crane to hoist the BTS cabinet to the rooftop. A site can be in operation in less than one day — a fraction of the time required for a traditional BTS.

## Excellent RF performance


Because of its small size and weight, the Alcatel-Lucent RRH2x40-AWS can be installed close to the antenna. Operators can therefore locate the Alcatel-Lucent RRH2x40-AWS where RF engineering is deemed ideal, minimizing trade-offs between available sites and RF optimum sites. The RF feeder cost and installation costs are reduced or eliminated, and there is no need for a Tower Mounted Amplifier (TMA) because losses introduced by the RF feeder are greatly reduced. The Alcatel-Lucent RRH2x40-AWS provides more RF power while at the same time consuming less electricity.

## Features


- Zero-footprint deployment
- Easy installation, with a lightweight unit can be carried and set up by one person
- Optimized RF power, with flexible site selection and elimination of a TMA
- Convection-cooled (fanless)
- Noise-free
- Best-in-class power efficiency, with significantly reduced energy consumption

## Benefits


- Leverages existing real estate with lower site costs
- Reduces installation costs, with fewer installation materials and simplified logistics
- Decreases power costs and minimizes environmental impacts, with the potential for eco-sustainable power options
- Improves RF performance and adds flexibility to network planning



Macro

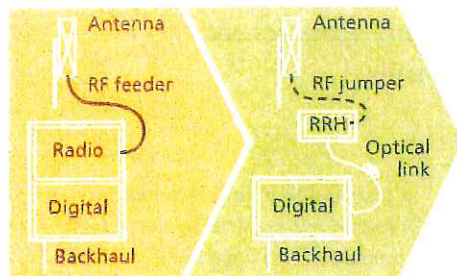

RRH for space-constrained cell sites



Distributed

## Technical specifications

### Physical dimensions

- Height: 620 mm (24.4 in.)
- Width: 270 mm (10.63 in.)
- Depth: 170mm (6.7 in.)
- Weight (without mounting kit): less than 20 kg (44 lb)

### Power

- Power supply: -48VDC

### Operating environment

- Outdoor temperature range:
  - With solar load: -40°C to +50°C (-40°F to +122°F)
  - Without solar load: -40°C to +55°C (-40°F to +131°F)

- Passive convection cooling (no fans)
- Enclosure protection
  - IP65 (International Protection rating)

### RF characteristics

- Frequency band: 1700/2100 MHz (AWS); 3GPP Band 4
- Bandwidth: up to 20 MHz
- RF output power at antenna port: 40 W nominal RF power for each Tx port
- Rx diversity: 2-way or 4-way with optional Rx Diversity module
- Noise figure: below 2.0 dB typical
- Antenna Line Device features
  - TMA and Remote electrical tilt (RET) support via AISG v2.0

### Optical characteristics

#### Type/number of fibers

- Single-mode variant
  - One Single Mode Single Fiber per RRH2x, carrying UL and DL using CWDM
  - Single mode dual fiber (SM/DF)
- Multi-mode variant
  - Two Multi-mode fibers per RRH2x: one carrying UL, the other carrying DL

### Optical fiber length

- Up to 500 m (0.31 mi), using MM fiber
- Up to 20 km (12.43 mi), using SM fiber

### Digital Ports and Alarms

- Two optical ports to support daisy-chaining
- Six external alarms

[www.alcatel-lucent.com](http://www.alcatel-lucent.com) Alcatel, Lucent, Alcatel-Lucent and the Alcatel-Lucent logo are trademarks of Alcatel-Lucent. All other trademarks are the property of their respective owners. The information presented is subject to change without notice. Alcatel-Lucent assumes no responsibility for inaccuracies contained herein. Copyright © 2010 Alcatel-Lucent. All rights reserved. CPG2809100912 (09)

## Alcatel-Lucent RRH2x40-07-U REMOTE RADIO HEAD

The Alcatel-Lucent RRH2x40-07-U is a high-power, small form-factor Remote Radio Head (RRH) operating in the North American Digital Dividend / 700MHz frequency band (3GPP Band 13). The Alcatel-Lucent RRH2x40-07-U is designed with an eco-efficient approach, providing operators with the means to achieve high quality and capacity coverage with minimum site requirements.



A distributed eNodeB expands deployment options by using two components, a Base Band Unit (BBU) containing the digital assets and a separate RRH containing the radio-frequency (RF) elements. This modular design optimizes available space and allows the main components of an eNodeB to be installed separately, within the same site or several kilometres apart.

The Alcatel-Lucent RRH2x40-07-U is linked to the BBU by an optical-fiber connection carrying downlink and uplink digital radio signals along with operations, administration and maintenance (OA&M) information. The Alcatel-Lucent RRH2x40-07-U has two transmit RF paths, 40 W RF output power per transmit path, and is designed to manage up to two-way receive diversity. The device is ideally suited to support macro coverage, with multiple-input multiple-output (MIMO) 2x2 operation in up to 10 MHz of bandwidth.

The Alcatel-Lucent RRH2x40-07-U is designed to make available all the benefits of a distributed eNodeB, with excellent RF characteristics, with low


capital expenditures (CAPEX) and low operating expenditures (OPEX). The limited space available in some sites may prevent the installation of traditional single-cabinet BTS equipment or require costly cranes to be employed, leaving coverage holes. However, many of these sites can host an Alcatel-Lucent RRH2x40-07-U installation, providing more flexible site selection and improved network quality along with greatly reduced installation time and costs.

### Fast, low-cost installation and deployment

The Alcatel-Lucent RRH2x40-07-U is a zero-footprint solution and operates noise-free, simplifying negotiations with site property owners and minimizing environmental impacts. Installation can easily be done by a single person because the Alcatel-Lucent RRH2x40-07-U is compact and weighs less than 23 kg (50 lb), eliminating the need for a crane to hoist the BTS cabinet to the rooftop. A site can be in operation in less than one day — a fraction of the time required for a traditional BTS.

## Excellent RF performance


Because of its small size and weight, the Alcatel-Lucent RRH2x40-07-U can be installed close to the antenna. Operators can therefore locate the Alcatel-Lucent RRH2x40-07-U where RF engineering is deemed ideal, minimizing trade-offs between available sites and RF optimum sites. The RF feeder cost and installation costs are reduced or eliminated, and there is no need for a Tower Mounted Amplifier (TMA) because losses introduced by the RF feeder are greatly reduced. The Alcatel-Lucent RRH2x40-07-U provides more RF power while at the same time consuming less electricity.



Macro

## Features


- Zero-footprint deployment
- Easy installation, with a lightweight unit can be carried and set up by one person
- Optimized RF power, with flexible site selection and elimination of a TMA
- Convection-cooled (fanless), noise-free, and heaterless unit
- Best-in-class power efficiency, with significantly reduced energy consumption

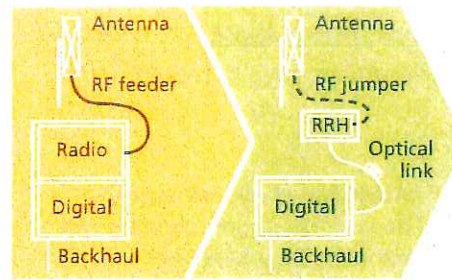

RRH for space-constrained cell sites

## Benefits

- Leverages existing real estate with lower site costs
- Reduces installation costs, with fewer installation materials and simplified logistics
- Decreases power costs and minimizes environmental impacts, with the potential for eco-sustainable power options
- Improves RF performance and adds flexibility to network planning



Distributed

## Technical specifications

### Physical dimensions

- Height: 390 mm (15.4 in.)
- Width: 380 mm (15 in.)
- Depth: 210 mm (8.2 in.)
- Weight (without mounting kit): less than 23 kg (50 lb)

### Power

- Power supply: -48V

### Operating environment

- Outdoor temperature range:
  - With solar load: -40°C to +50°C (-40°F to +122°F)
  - Without solar load: -40°C to +55°C (-40°F to +131°F)
- Passive convection cooling (no fans)

- Enclosure protection
  - IP65 (International Protection rating)

### RF characteristics

- Frequency band: 700 MHz; 3GPP Band 13
- Bandwidth: up to 10 MHz
- RF output power at antenna port:
  - 40 W nominal RF power for each Tx port
- Rx diversity: 2-way or 4-way
- Noise figure: below 2.5 dB typical
- ALD features
  - TMA
  - Remote electrical tilt (RET) support (AISG v2.0)

### Optical characteristics

#### Type/number of fibers

- Up to 3.12 Gb/s line bit rate
- Single-mode variant
  - One SM fiber (9/125 μm) per RRH2x, carrying UL and DL using CWDM (at 1550/1310 nm)
- Multi-mode variant
  - Two MM fibers (50/125 μm) per RRH2x: one carrying UL, the other carrying DL (at 850 nm)

### Optical fiber length

- Up to 500 m (0.31 mi), using MM fiber
- Up to 20 km (12.43 mi), using SM fiber

### Alarms and ports

- Six external alarms
- Two optical ports to support daisy-chaining

[www.alcatel-lucent.com](http://www.alcatel-lucent.com) Alcatel, Lucent, Alcatel-Lucent and the Alcatel-Lucent logo are trademarks of Alcatel-Lucent. All other trademarks are the property of their respective owners. The information presented is subject to change without notice. Alcatel-Lucent assumes no responsibility for inaccuracies contained herein. Copyright © 2010 Alcatel-Lucent. All rights reserved. CPG2809100913 (09)



**HYBRIFLEX™ RRH Hybrid Feeder Cabling Solution, 1-5/8", Single-Mode Fiber**

**Product Description**

RFS' HYBRIFLEX Remote Radio Head (RRH) hybrid feeder cabling solution combines optical fiber and DC power for RRHs in a single lightweight aluminum corrugated cable, making it the world's most innovative solution for RRH deployments.

It was developed to reduce installation complexity and costs at Cellular sites. HYBRIFLEX allows mobile operators deploying an RRH architecture to standardize the RRH installation process and eliminate the need for and cost of cable grounding. HYBRIFLEX combines optical fiber (multi-mode or single-mode) and power in a single corrugated cable. It eliminates the need for junction boxes and can connect multiple RRHs with a single feeder. Standard RFS CELLFLEX® accessories can be used with HYBRIFLEX cable. Both pre-connectorized and on-site options are available.

**Features/Benefits**

- Aluminum corrugated armor with outstanding bending characteristics – minimizes installation time and enables mechanical protection and shielding
- Same accessories as 1 5/8" coaxial cable
- Outer conductor grounding – Eliminates typical grounding requirements and saves on installation costs
- Lightweight solution and compact design – Decreases tower loading
- Robust cabling – Eliminates need for expensive cable trays and ducts
- Installation of tight bundled fiber optic cable pairs directly to the RRH – Reduces CAPEX and wind load by eliminating need for interconnection
- Optical fiber and power cables housed in single corrugated cable – Saves CAPEX by standardizing RRH cable installation and reducing installation requirements
- Outdoor polyethylene jacket – Ensures long-lasting cable protection



Figure 1: HYBRIFLEX Series

**Technical Specifications**

<b>Structure</b>			
Outer Conductor Armor:	Corrugated Aluminum	[mm (in)]	46.5 (1.83)
Jacket:	Polyethylene, PE	[mm (in)]	50.3 (1.98)
UV-Protection:	Individual and External Jacket		Yes

<b>Mechanical Properties</b>			
Weight, Approximate		[kg/m (lb/ft)]	1.9 (1.30)
Minimum Bending Radius, Single Bending		[mm (in)]	200 (8)
Minimum Bending Radius, Repeated Bending		[mm (in)]	500 (20)
Recommended/Maximum Clamp Spacing		[m (ft)]	1.0 / 1.2 (3.25 / 4.0)

<b>Electrical Properties</b>			
DC-Resistance Outer Conductor Armor		[Ω/km (Ω/1000ft)]	0.68 (0.205)
DC-Resistance Power Cable, 8.4mm <sup>2</sup> (8AWG)		[Ω/km (Ω/1000ft)]	2.1 (0.307)

<b>Fiber Optic Properties</b>			
Version			Single-mode OM3
Quantity, Fiber Count			16 (8 pairs)
Core/Clad		[μm]	50/125
Primary Coating (Acrylate)		[μm]	245
Buffer Diameter, Nominal		[μm]	900
Secondary Protection, Jacket, Nominal		[mm (in)]	2.0 (0.08)
Minimum Bending Radius		[mm (in)]	104 (4.1)
Insertion Loss @ wavelength 850nm		dB/km	3.0
Insertion Loss @ wavelength 1310nm		dB/km	1.0
Standards (Meets or exceeds)			UL94-V0, UL1666 RoHS Compliant

<b>DC Power Cable Properties</b>			
Size (Power)		[mm <sup>2</sup> (AWG)]	8.4 (8)
Quantity, Wire Count (Power)			16 (8 pairs)
Size (Alarm)		[mm <sup>2</sup> (AWG)]	0.8 (18)
Quantity, Wire Count (Alarm)			4 (2 pairs)
Type			UV protected
Strands			19
Primary Jacket Diameter, Nominal		[mm (in)]	6.8 (0.27)
Standards (Meets or exceeds)			NFPA 130, ICEA S-95-658 UL Type XHHW-2, UL 44 UL-LS Limited Smoke, UL VW-1 IEEE-383 (1974), IEEE1202/FT4 RoHS Compliant

<b>Environment</b>			
Installation Temperature		[°C (°F)]	-40 to +65 (-40 to 149)
Operation Temperature		[°C (°F)]	-40 to +65 (-40 to 149)

\* This data is provisional and subject to change.

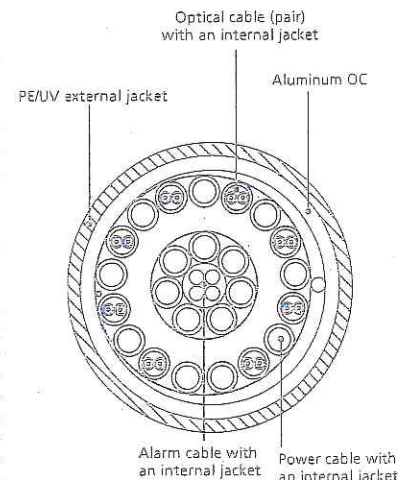


Figure 2: Construction Detail

All information contained in the present datasheet is subject to confirmation at time of ordering.



General Power Density

Site Name: EAST HADDAM 2, CT  
 Cumulative Power Density

Operator	Operating Frequency (MHz)	Number of Trans.	ERP Per Trans. (watts)	Total ERP (watts)	Distance to Target (feet)	Calculated Power Density (mW/cm <sup>2</sup> )	Maximum Permissible Exposure* (mW/cm <sup>2</sup> )	Fraction of MPE (%)
VZW PCS	1970	11	274	3017.954	90	0.1340	1.0	13.40%
VZW Cellular	869	9	273	2452.52	90	0.1089	0.5793333333	18.80%
VZW AWS	2145	1	1750	1750	90	0.0777	1.0	7.77%
VZW 700	698	1	1050	1050	90	0.0466	0.4653333333	10.02%
<b>Total Percentage of Maximum Permissible Exposure</b>								<b>49.98%</b>


\*Guidelines adopted by the FCC on August 1, 1996, 47 CFR Part 1 based on NCRP Report 86, 1986 and generally on ANSI/IEEE C95.1-1992

MHz = Megahertz

mW/cm<sup>2</sup> = milliwatts per square centimeter

ERP = Effective Radiated Power

Absolute worst case maximum values used.



STATE OF CONNECTICUT  
CONNECTICUT SITING COUNCIL

Ten Franklin Square, New Britain, CT 06051  
Phone: (860) 827-2935 Fax: (860) 827-2950  
E-Mail: [siting.council@ct.gov](mailto:siting.council@ct.gov)  
[www.ct.gov/csc](http://www.ct.gov/csc)

March 15, 2013

The Honorable Mark B. Walter  
First Selectman  
Town of East Haddam  
Town Office Building  
P. O. Box K  
East Haddam, CT 06423

RE: **EM-VER-041-130314** - Cellco Partnership d/b/a Verizon Wireless notice of intent to modify an existing telecommunications facility located at 33 Neptune Avenue, East Haddam, Connecticut.

Dear Mr. Walter:

The Connecticut Siting Council (Council) received a request to modify an existing telecommunications facility, pursuant to Regulations of Connecticut State Agencies Section 16-50j-72, a copy of which has already been provided to you.

If you have any questions or comments regarding the proposal, please call me or inform the Council by April 1, 2013.

Thank you for your cooperation and consideration.

Very truly yours,

Linda Roberts  
Executive Director

LR/jb

c: Cary H. Brownell, Chm, Planning and Zoning Comm, Town of East Haddam