



Northeast Site Solutions
Denise Sabo
4 Angela's Way, Burlington CT 06013
203-435-3640
denise@northeastsitesolutions.com

July 28, 2022

Members of the Siting Council
Connecticut Siting Council
Ten Franklin Square
New Britain, CT 06051

RE: Tower Share Application
331 Killingworth Road (Route 80) Guilford, CT 06437
Latitude: 41.353152
Longitude: -72.688247
Site #: CT13065-A_BOHVN00180A_SBA_DISH

Dear Ms. Bachman:

This letter and attachments are submitted on behalf of Dish Wireless LLC. Dish Wireless LLC plans to install antennas and related equipment to the tower site located at 331 Killingworth Road (Route 80) Guilford, Connecticut.

Dish Wireless LLC proposes to install three (3) 600/1900 MHz 5G antennas and six (6) RRUs, at the 105-foot level of the existing 152-foot monopole tower, one (1) Fiber cable will also be installed. Dish Wireless LLC equipment cabinets will be placed within a 7' x 5' lease area within the fenced compound. Included are plans by B+T, dated July 13, 2022, Exhibit C. Also included is a structural analysis prepared by TES, dated April 26, 2022, confirming that the existing tower is structurally capable of supporting the proposed equipment. Attached as Exhibit D. The facility was originally approved by the Connecticut Siting Council, Docket No. 47 on June 6, 1985. Please see attached Exhibit A.

Please accept this letter as notification pursuant to Regulations of Connecticut State Agencies 16-50aa, of Dish Wireless LLC intent to share a telecommunications facility pursuant to R.C.S.A. 16-50j-88. In accordance with R.C.S.A., a copy of this letter is being sent to Matthew T. Hoey III, First Selectman and Jaime Stein, Town Planner for the Town of Guilford, as well as the tower owner (SBA) and property owner (Kathleen Bloomquist).

The planned modifications of the facility fall squarely within those activities explicitly provided for in R.C.S.A. 16-50j-89.

1. The proposed modification will not result in an increase in the height of the existing structure. The top of the existing tower is 152-feet and the Dish Wireless LLC antennas will be located at a center line height of 105-feet.
2. The proposed modifications will not result in an increase of the site boundary as depicted on the attached site plan.



3. The proposed modifications will not increase noise levels at the facility by six decibels or more, or to levels that exceed local and state criteria. The incremental effect of the proposed changes will be negligent.

4. The operation of the proposed antennas will not increase radio frequency emissions at the facility to a level at or above the Federal Communications Commission safety standard. The combined site operations will result in a total power density of 44.82% as evidenced by Exhibit F.

Connecticut General Statutes 16-50aa indicates that the Council must approve the shared use of a telecommunications facility provided it finds the shared use is technically, legally, environmentally, and economically feasible and meets public safety concerns. As demonstrated in this letter, Dish Wireless LLC respectfully submits that the shared use of this facility satisfies these criteria.

A. Technical Feasibility. The existing monopole has been deemed structurally capable of supporting Dish Wireless LLC proposed loading. The structural analysis is included as Exhibit D.

B. Legal Feasibility. As referenced above, C.G.S. 16-50aa has been authorized to issue orders approving the shared use of an existing tower such as this monopole tower in Guilford. Under the authority granted to the Council, an order of the Council approving the requested shared use would permit Dish Wireless LLC to obtain a building permit for the proposed installation. Further, a Letter of Authorization is included as Exhibit G, authorizing Dish Wireless LLC to file this application for shared use.

C. Environmental Feasibility. The proposed shared use of this facility would have a minimal environmental impact. The installation of Dish Wireless LLC equipment at the 105-foot level of the existing 152-foot tower would have an insignificant visual impact on the area around the tower. Dish Wireless LLC ground equipment would be installed within the existing facility compound. Dish Wireless LLC shared use would therefore not cause any significant alteration in the physical or environmental characteristics of the existing site. Additionally, as evidenced by Exhibit F, the proposed antennas would not increase radio frequency emissions to a level at or above the Federal Communications Commission safety standard.

D. Economic Feasibility. Dish Wireless LLC will be entering into an agreement with the owner of this facility to mutually agreeable terms. As previously mentioned, the Letter of Authorization has been provided by the owner to assist Dish Wireless LLC with this tower sharing application.

E. Public Safety Concerns. As discussed above, the tower is structurally capable of supporting Dish Wireless LLC proposed loading. Dish Wireless LLC is not aware of any public safety concerns relative to the proposed sharing of the existing tower. Dish Wireless LLC intentions of providing new and improved wireless service through the shared use of this facility is expected to enhance the safety and welfare of local residents and individuals traveling through Guilford.

Sincerely,

Denise Sabo

Denise Sabo
Mobile: 203-435-3640
Fax: 413-521-0558
Office: 4 Angela's Way, Burlington CT 06013
Email: denise@northeastsitesolutions.com



NSS **NORTHEAST**
SITE SOLUTIONS
Turnkey Wireless Development

Attachments

Cc: Matthew T. Hoey III, First Selectman
Town of Guilford
31 Park Street
Guilford, CT 06437

Jaime Stein, Town Planner
Town of Guilford
50 Boston Street
Guilford, CT 06437

Kathleen Bloomquist, Property Owner
331 Route 80
Guilford, CT 06437

SBA - Tower Owner

Exhibit A

Original Facility Approval

DOCKET NO. 47

AN APPLICATION SUBMITTED BY COMMUNITY TV SYSTEMS, INC., D/B/A ROLLINS CABLEVISION OF CONNECTICUT, FOR A CERTIFICATE OF ENVIRONMENTAL COMPATIBILITY AND PUBLIC NEED FOR THE CONSTRUCTION OF A MICROWAVE HUB SITE, TOWER, AND ASSOCIATED EQUIPMENT IN THE TOWN OF GUILFORD, CONNECTICUT. : CONNECTICUT SITING
: COUNCIL
: June 6, 1985

D E C I S I O N A N D O R D E R

Pursuant to the foregoing Opinion, the Council hereby orders that a Certificate of Environmental Compatibility and Public Need as required by section 16-50k of the General Statutes of Connecticut be issued to Rollins Cablevision for the construction, operation, and maintenance of a microwave hub site, tower, and associated equipment in the Town of Guilford, Connecticut.

The facility shall be constructed, operated, and maintained as specified in the Council's record on this matter, and subject to the following conditions:

1. The tower shall be no taller than necessary to provide the proposed service, and in no event shall exceed 150 feet;
2. The certificate holder shall notify the Council if any additional equipment other than that listed in the Findings of Fact accompanying this Decision and Order is added to this facility;
3. The facility construction shall be conducted in accordance with all applicable federal, state, and municipal laws and regulations;
4. The certificate holder shall comply with the reporting requirements of section 16-50j-77 of the Council's Rules of Practice;

5. Prior to the commencement of construction, the certificate holder shall provide plans for the plantings of evergreens around the base of the tower and within the applicant's leased area;
6. The tower site parcel shall be located as shown in Exhibit 7 of the application, immediately adjacent to the Connecticut State Forest boundary;
7. Construction activities shall take place during daylight working hours; and
8. This decision and order shall be void if all construction authorized is not completed within two years of the issuance of this decision.

Pursuant to section 16-50p of the General Statutes, we hereby direct that a copy of the Opinion and Decision and Order shall be served on each person listed below. A notice of the issuance shall be published in the New Haven Journal Courier.

The parties to this proceeding are:

Rollins Cablevision (Applicant)
P.O. Box 667
44 North Branford Road
Branford, Connecticut 06405
ATTN: Thomas E. Gallagher, General Manager

Byrne, Slater, Sandler, Shulman & Rouse, P.C. (its attorney)
P.O. Box 3216
111 Pearl Street
Hartford, Connecticut 06103
ATTN: Kevin B. Sullivan, Esquire








Mr. David B. Damer
Vice-Chairman
Guilford Conservation Commission
440 Great Hill Road
Guilford, Connecticut 06437

Mr. David W. Fisher
Chairman
Town of Guilford
Guilford Planning and
Zoning Commission
Guilford, Connecticut 06437

C E R T I F I C A T I O N

The undersigned members of the Connecticut Siting Council hereby certify that they have heard this case or read the record thereof, and that we voted as follows:


Dated at New Britain, Connecticut, this 6th day of June, 1985.
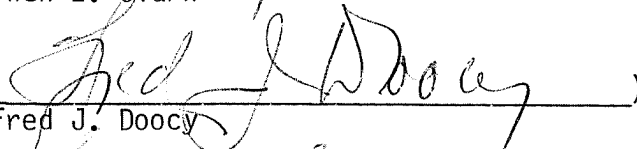
<u>Council Members</u>	<u>Vote Cast</u>
 _____) Gloria Dibble Pond Chairperson	Yes
 _____) Commissioner John Downey Designee: Commissioner Peter G. Boucher	Yes
_____) Commissioner Stanley Pac Designee: Christopher Cooper	Absent
 _____) Owen L. Clark	Yes
 _____) Fred J. Doocy	Yes
 _____) Mortimer A. Gelston	Yes
 _____) James G. Horsfall	Yes
_____) William H. Smith	Absent
 _____) Colin C. Tait	Yes

STATE OF CONNECTICUT)
 :
COUNTY OF HARTFORD) ss. New Britain, June 6, 1985

I hereby certify that the foregoing is a true and correct copy of the decision and order issued by the Connecticut Siting Council, State of Connecticut.

ATTEST:



Christopher S. Wood, Executive Director
Connecticut Siting Council

Exhibit B

Property Card

All information is for assessment purposes only. Assessments are calculated at 70% of the estimated October 1, 2017 market value which was the date of the last revaluation as completed by eQuality Valuation Services, LLC.



Information on the Property Records for the Municipality of Guilford was last updated on 4/2/2022.



Parcel Information

Location:	331 ROUTE 80	Map and Parcel:	10701401	Census Tract:	1903
Zoning:	R-8	Developer's Map:	1489	Developer's Lot:	1
Total Acreage:	1.58	Farm, Forest, Open Space Acres:		Unique ID:	286

Value Information

	Appraised Value	Assessed Value
Land	281,500	197,050
Buildings	140,699	98,490
Detached Outbuildings	0	0
Total	422,199	295,540


Owner's Information

Owner's Data

BLOOMQUIST KATHLEEN
331 ROUTE 80
GUILFORD CT 06437

Building 1

Photo Not Available

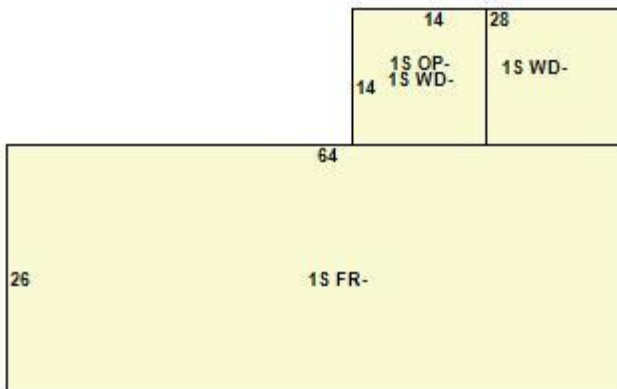

Occupancy:	SINGLE FAMILY	Construction:	WOOD FRAME	Design:	1.0 RANCH
Story Height:	1.00	Living Area Above Ground:	1,664	Year Built:	1972
Year Remodeled:		Condition:	GOOD	Foundation:	POURED CONC

Exterior Siding:	ALUMINUM	Roofing:	ASPHALT	Heating:	HWBB
Fuel:	OIL	A/C Percent:	90%	Total Rooms:	5
Total Bedrooms:	3	Kitchens:	1	Full Baths:	1
Half Baths:	1	Extra Fixtures:	0	Basement Finished Area:	0

Special Features


CHIMNEYS	1
----------	---

Attached Components

Type:	Year Built:	Area:
WOOD DECK	1972	392
OPEN PORCH	1972	196

Building 2

Photo Not Available

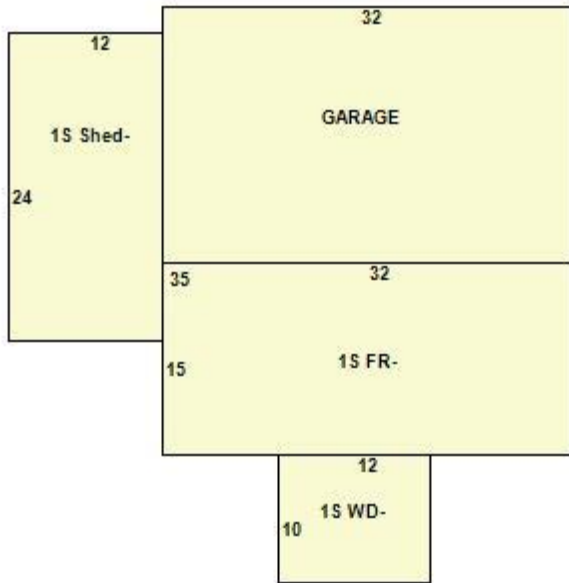

Occupancy:	SINGLE FAMILY	Construction:	WOOD FRAME	Design:	1.0 RANCH
Story Height:	1.00	Living Area Above Ground:	480	Year Built:	1970
Year Remodeled:		Condition:	AVERAGE	Foundation:	POURED CONC
Exterior Siding:	VINYL	Roofing:	ASPHALT	Heating:	BASEBOARD
Fuel:	ELECTRIC	A/C Percent:	0%	Total Rooms:	2
Total Bedrooms:	1	Kitchens:	1	Full Baths:	1
Half Baths:	0	Extra Fixtures:	0	Basement Finished Area:	0

Special Features

Attached Components

Type:	Year Built:	Area:
WOOD DECK	1970	120
ATT FRAME GARAGE	1970	1,120
AVERAGE SHED	1970	288

Owner History - Sales



Owner Name	Volume	Page	Sale Date	Deed Type	Sale Price
BLOOMQUIST KATHLEEN	0977	0256	06/01/2021	Name Change	\$0
ACAMPORA KATHLEEN	0907	0862	12/12/2016	Quit Claim	\$0
ACAMPORA DAVID & KATHLEEN L	0443	0612	11/23/1994		\$197,221

Information Published With Permission From The Assessor


Town of Guilford, Connecticut - Assessment Parcel Map

Unique ID: 286

Address: 331 ROUTE 80

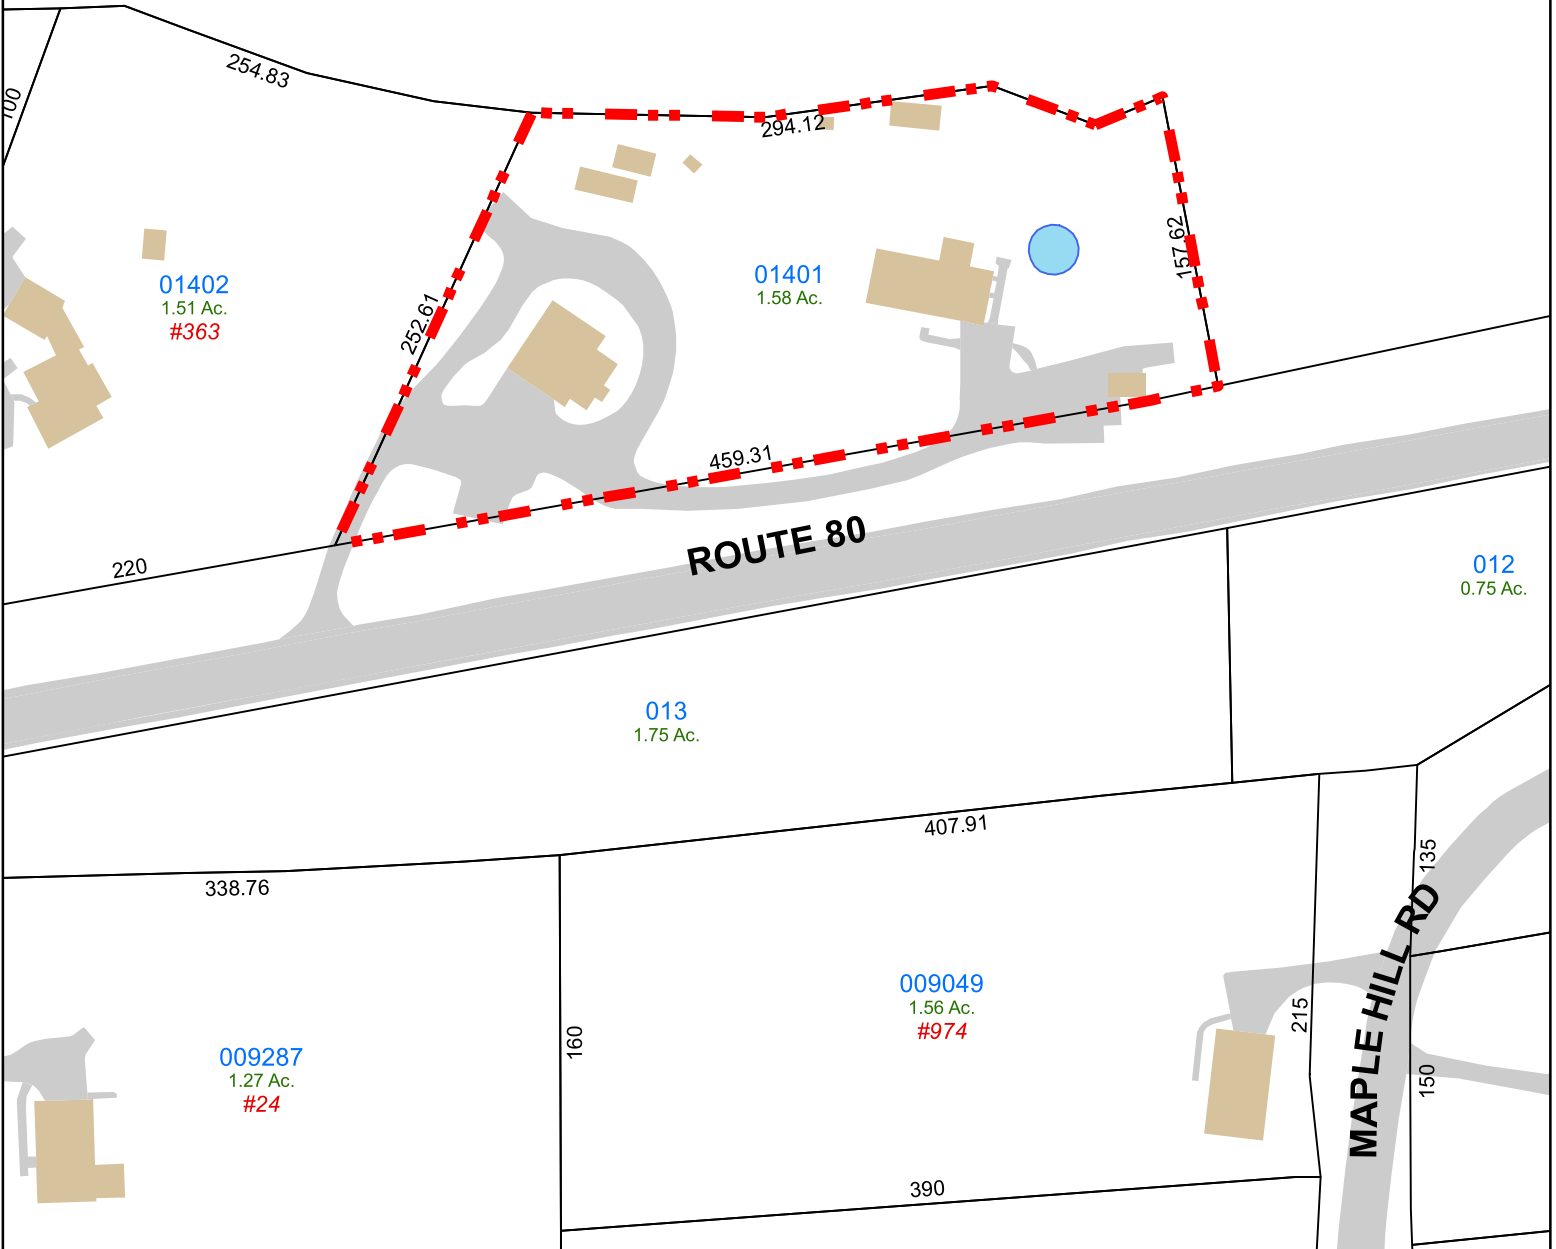

Approximate Scale: 1 inch = 100 feet



Map Produced:
August 2021

Disclaimer:
This map is for informational purposes only.
All information is subject to verification by any user.
The Town of Guilford and its mapping contractors
assume no legal responsibility
for the information contained herein.

Exhibit C

Construction Drawings



DISH Wireless L.L.C. SITE ID:

BOHVN00180A

DISH Wireless L.L.C. SITE ADDRESS:

**331 KILLINGWORTH ROAD (RT-80)
GUILFORD, CT 06437**

SCOPE OF WORK	
THIS IS NOT AN ALL INCLUSIVE LIST. CONTRACTOR SHALL UTILIZE SPECIFIED EQUIPMENT PART OR ENGINEER APPROVED EQUIVALENT. CONTRACTOR SHALL VERIFY ALL NEEDED EQUIPMENT TO PROVIDE A FUNCTIONAL SITE. THE PROJECT GENERALLY CONSISTS OF THE FOLLOWING:	
TOWER SCOPE OF WORK:	
<ul style="list-style-type: none"> • INSTALL (3) PROPOSED PANEL ANTENNAS (1 PER SECTOR) • INSTALL (3) PROPOSED SECTOR FRAMES • INSTALL PROPOSED JUMPERS • INSTALL (6) PROPOSED RRUs (2 PER SECTOR) • INSTALL (1) PROPOSED OVER VOLTAGE PROTECTION DEVICE (OVP) • INSTALL (1) PROPOSED HYBRID CABLE 	
GROUND SCOPE OF WORK:	
<ul style="list-style-type: none"> • INSTALL (1) PROPOSED PPC CABINET • INSTALL (1) PROPOSED FIF RACK • INSTALL (1) PROPOSED POWER CONDUIT • INSTALL (1) PROPOSED TELCO CONDUIT • INSTALL (1) PROPOSED TELCO-FIBER BOX • INSTALL (1) PROPOSED GPS UNIT • INSTALL (1) PROPOSED SAFETY SWITCH (IF REQUIRED) • INSTALL (1) PROPOSED FIBER NID (IF REQUIRED) • INSTALL (1) PROPOSED METER SOCKET 	

SITE INFORMATION	PROJECT DIRECTORY
PROPERTY OWNER: ADDRESS: BLOOMQUIST KATHLEEN 331 ROUTE 80 GUILFORD, CT 06437	APPLICANT: DISH Wireless L.L.C. 5701 SOUTH SANTA FE DRIVE LITTLETON, CO 80120
TOWER TYPE: SELF-SUPPORT TOWER	TOWER OWNER: SBA COMMUNICATAIONS CORP. 8051 CONGRESS AVENUE BOCA RATON, FL 33487 (800) 487-7483
TOWER CO SITE ID: CT13065-A	SITE DESIGNER: B+T GROUP 1717 S. BOULDER AVE, SUITE 300 TULSA, OK 74119 (918) 587-4630
TOWER APP NUMBER: 169197	SITE ACQUISITION: RYAN LYNCH ryan.lynych@dish.com
COUNTY: NEW HAVEN	CONST. MANAGER: JAVIER SOTO javier.soto@dish.com
LATITUDE (NAD 83): 41° 21' 11.39" N 41.353164	RF ENGINEER: SYED ZAIDI syed.zaidi@dish.com
LONGITUDE (NAD 83): 72° 41' 17.71" W -72.688252	
ZONING JURISDICTION: CITY OF GUILFORD	
ZONING DISTRICT: R-8	
PARCEL NUMBER: 10701401	
OCCUPANCY GROUP: U	
CONSTRUCTION TYPE: II-B	
POWER COMPANY: EVERSOURCE	
TELEPHONE COMPANY: VERIZON	



5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120




8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com

7/13/22



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY:	CHECKED BY:	APPROVED BY:
RK	BEH	BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
TITLE SHEET

SHEET NUMBER
T-1

CONNECTICUT CODE OF COMPLIANCE

ALL WORK SHALL BE PERFORMED AND MATERIALS INSTALLED IN ACCORDANCE WITH THE CURRENT EDITIONS OF THE FOLLOWING CODES AS ADOPTED BY THE LOCAL GOVERNING AUTHORITIES. NOTHING IN THESE PLANS IS TO BE CONSTRUED TO PERMIT WORK NOT CONFORMING TO THESE CODES

CODE TYPE	CODE
BUILDING	2018 CT STATE BUILDING CODE/2015 IBC W/ CT AMENDMENTS
MECHANICAL	2018 CT STATE BUILDING CODE/2015 IMC W/ CT AMENDMENTS
ELECTRICAL	2018 CT STATE BUILDING CODE/2017 NEC W/ CT AMENDMENTS

SHEET INDEX

SHEET NO.	SHEET TITLE
T-1	TITLE SHEET
LS-1	SITE SURVEY
A-1	OVERALL AND ENLARGED SITE PLAN
A-2	ELEVATION, ANTENNA LAYOUT AND SCHEDULE
A-3	EQUIPMENT PLATFORM AND H-FRAME DETAILS
A-4	EQUIPMENT DETAILS
A-5	EQUIPMENT DETAILS
A-6	EQUIPMENT DETAILS
A-7	STIFF ARM LOCATION DETAIL
E-1	ELECTRICAL/FIBER ROUTE PLAN AND NOTES
E-2	ELECTRICAL DETAILS
E-3	ELECTRICAL ONE-LINE, FAULT CALCS & PANEL SCHEDULE
G-1	GROUNDING PLANS AND NOTES
G-2	GROUNDING DETAILS
G-3	GROUNDING DETAILS
RF-1	RF CABLE COLOR CODE
GN-1	LEGEND AND ABBREVIATIONS
GN-2	RF SIGNAGE
GN-3	GENERAL NOTES
GN-4	GENERAL NOTES
GN-5	GENERAL NOTES

SITE PHOTO



DIRECTIONS

DIRECTIONS FROM BRADLEY INTERNATIONAL AIRPORT:
GET ON BRADLEY INTERNATIONAL AIRPORT CON FROM BRADLEY INTERNATIONAL AIRPORT, HEAD NORTH TOWARD BRADLEY INTERNATIONAL AIRPORT, SLIGHT LEFT ONTO BRADLEY INTERNATIONAL AIRPORT, CONTINUE STRAIGHT, KEEP RIGHT TO CONTINUE TOWARD BRADLEY INTERNATIONAL AIRPORT CON, TAKE I-91 S AND CT-9 S TO CT-17 S IN MIDDLETOWN. TAKE EXIT 13 FROM CT-9 S, CONTINUE ON CT-17 S. TAKE CT-79 S TO CT-80 W IN GUILFORD, CONTINUE ONTO CT-17 S, TURN LEFT ONTO CT-79 S/MADISON RD, AT THE ROUNDABOUT, TAKE THE 1ST EXIT ONTO CT-80 W, TURN RIGHT AND ARRIVE AT BOHVN00180A.

VICINITY MAP



UNDERGROUND SERVICE ALERT CBYD 811
UTILITY NOTIFICATION CENTER OF CONNECTICUT
(800) 922-4455
WWW.CBYD.COM



CALL 2 WORKING DAYS UTILITY NOTIFICATION PRIOR TO CONSTRUCTION

GENERAL NOTES

THE FACILITY IS UNMANNED AND NOT FOR HUMAN HABITATION. A TECHNICIAN WILL VISIT THE SITE AS REQUIRED FOR ROUTINE MAINTENANCE. THE PROJECT WILL NOT RESULT IN ANY SIGNIFICANT DISTURBANCE OR EFFECT ON DRAINAGE, NO SANITARY SEWER SERVICE, POTABLE WATER, OR TRASH DISPOSAL IS REQUIRED AND NO COMMERCIAL SIGNAGE IS PROPOSED.


11"x17" PLOT WILL BE HALF SCALE UNLESS OTHERWISE NOTED

CONTRACTOR SHALL VERIFY ALL PLANS, EXISTING DIMENSIONS, AND CONDITIONS ON THE JOB SITE, AND SHALL IMMEDIATELY NOTIFY THE ENGINEER IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK.



LEGEND

	Well		Water
	Clear Area		Wetland
	Confluence Line		Parking Water
	Drainage Line		Sign
	Gas Gate		Utility Pole
	Hydrant		Water Gate
	Light Pole		

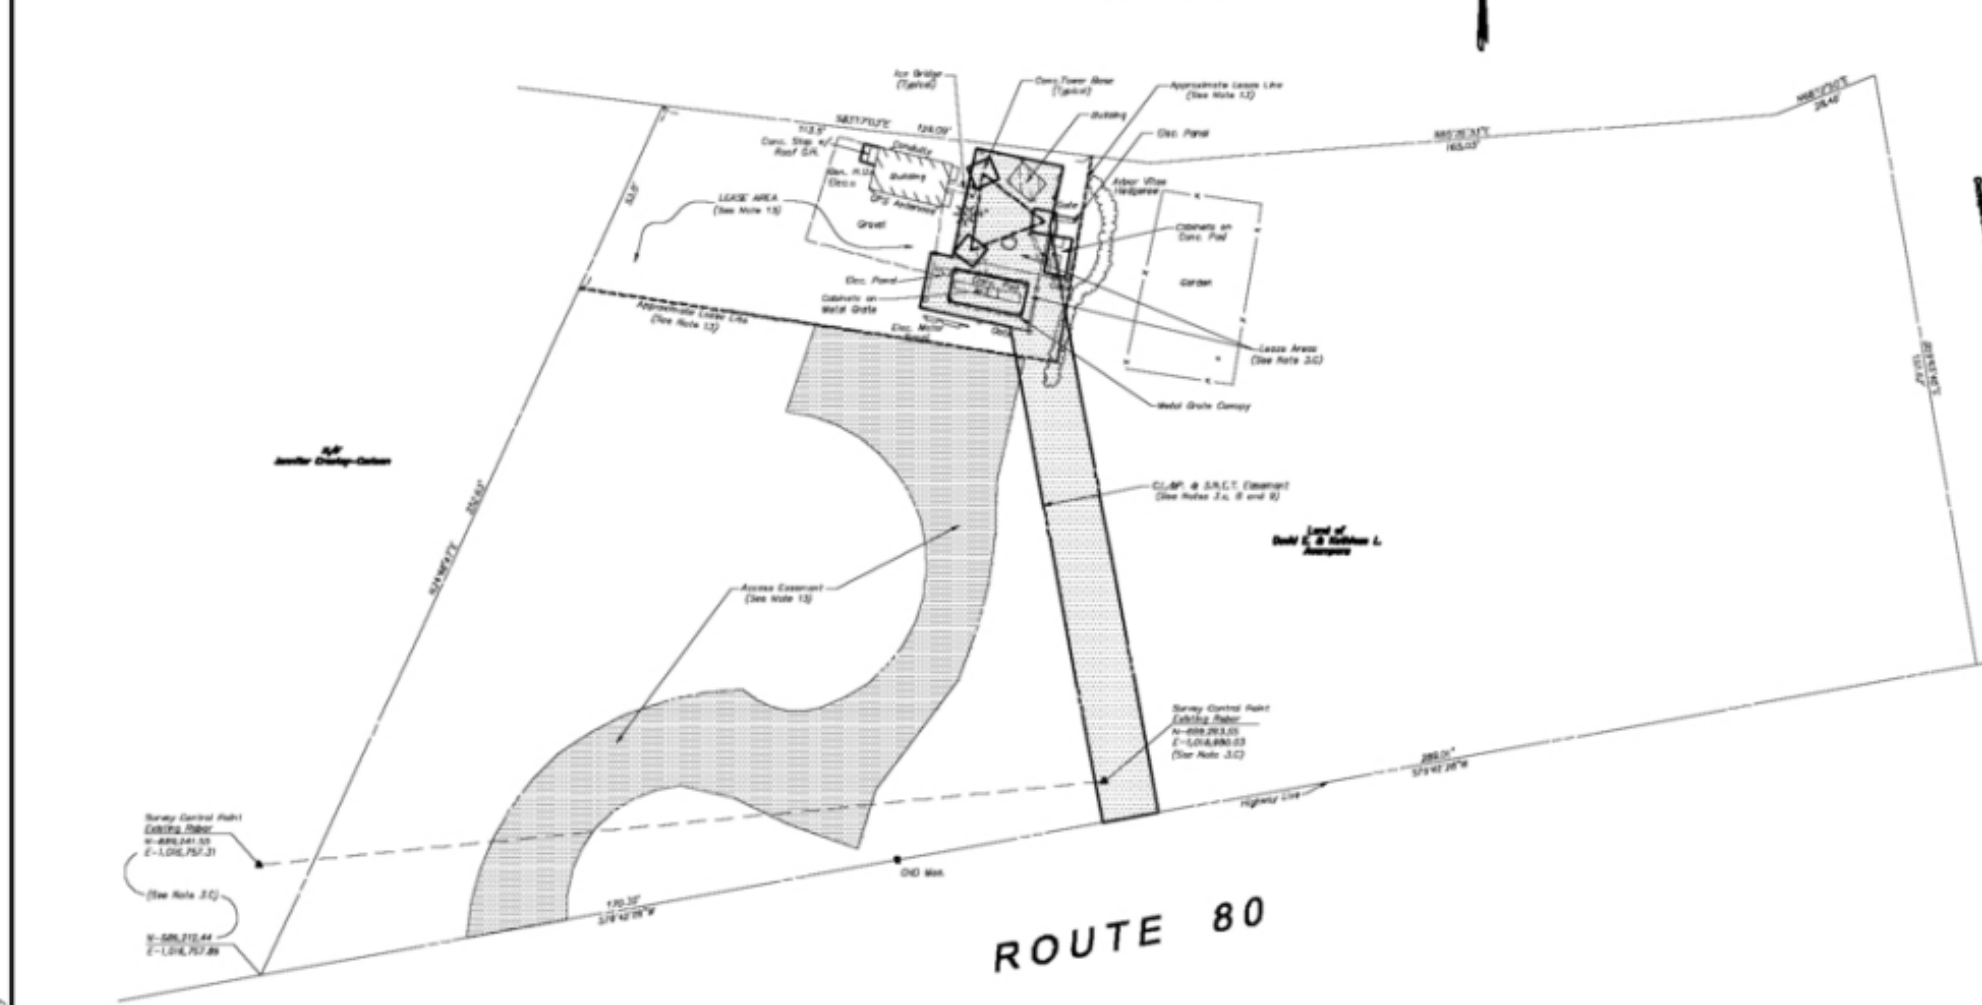

PROPERTY SURVEY
LEASE AREAS
LOCATED ON LAND OF
DAVID E. & KATHLEEN L. ACAMPORA
331 ROUTE 80
GUILFORD, CONNECTICUT



- NOTES**
- THIS SURVEY AND MAP HAS BEEN PREPARED IN ACCORDANCE WITH THE REGULATIONS OF CONNECTICUT STATE BOARD OF SURVEYING AND MAPS IN THE STATE OF CONNECTICUT ADOPTED BY THE CONNECTICUT ASSOCIATION OF LAND SURVEYORS, P.C. ON SEPTEMBER 26, 1996. THE TYPE OF SURVEY IS A PROPERTY SURVEY. THE BOUNDARY OR DIMENSION CATEGORY IS A SURVEYED ACCURACY. THE HORIZONTAL ACCURACY CONFORMS TO CLASS A-2 ACCURACY.
 - BOUNDARIES REFER TO THE BOUNDARY ESTABLISHED FOR THE MAP REFERENCED IN NOTE 3.C.
 - REFERENCE IS MADE TO THE FOLLOWING MAPS:
 - TOWN OF WYMAP TOWN OF GUILFORD, NO. BRANFORD-KILLBUCKEN ROAD FROM HART ROAD EASTERLY TO THE HANSON TOWN LINE, ROUTE NO. 80, BY THE CONNECTICUT STATE HIGHWAY DEPARTMENT, SCALE 1"=500', NUMBER 89-04, SHEET 1 & 2 OF 2, SECTION 2, DATED JULY 12, 1983.
 - "MAP SHOWING THE FINAL PLAN OF A SUBDIVISION TO BE KNOWN AS "MARA MARSH" LOCATED IN THE TOWN OF GUILFORD, CONNECTICUT, BY ARNOLD & WELLS, SCALE 1"=500', DATED MARCH 26, 1970, REVISED TO APRIL 20, 1970.
 - "MAP SHOWING EASEMENT AREA TO BE GRANTED TO THE CONNECTICUT LIGHT & POWER COMPANY ACROSS THE PROPERTY SAID L. & KATHLEEN L. ACAMPORA CONNECTICUT ROUTE 80 GUILFORD, CONNECTICUT, BY CONNOR & SHEPARD ASSOCIATES, P.C. SCALE AS NOTED, DATED 3-24-98.
 - "TOWN SITE ESTABLISHMENT AND GUILFORD, CONNECTICUT EASEMENT MAP PREPARED FOR NATION" BY CONNOR & SHEPARD ASSOCIATES, P.C. SCALE AS NOTED, 04/22/98, REVISED TO 6-23-99.
 - REFERENCE IS MADE TO A LEASE AS RECORDED IN VOLUME 290, PAGE 898 AND A COMMENCEMENT OF LEASE AS RECORDED IN VOLUME 328, PAGE 4 OF THE GUILFORD LAND RECORDS.
 - REFERENCE IS MADE TO A WARRANTY TO PERMIT STORAGE OF CONSTRUCTION EQUIPMENT AS RECORDED IN VOLUME 385, PAGE 1003 OF THE GUILFORD LAND RECORDS.
 - REFERENCE IS MADE TO A SPECIAL PERMIT GRANTED FOR AUTOMOTIVE REPAIR AS RECORDED IN VOLUME 465, PAGE 380 OF THE GUILFORD LAND RECORDS.
 - REFERENCE IS MADE TO A MEMORANDUM OF PURCHASE AGREEMENT AS RECORDED IN VOLUME 533, PAGE 803 OF THE GUILFORD LAND RECORDS.
 - THE PROPERTY IS SUBJECT TO AN EJECTING DISTRIBUTION EASEMENT AS RECORDED IN VOLUME 533, PAGE 808 OF THE GUILFORD LAND RECORDS.
 - THE PROPERTY IS SUBJECT TO A TELEPHONE DISTRIBUTION EASEMENT AS RECORDED IN VOLUME 533, PAGE 811 OF THE GUILFORD LAND RECORDS.
 - REFERENCE IS MADE TO A MEMORANDUM OF LAND LEASE AS RECORDED IN VOLUME 593, PAGE 873 OF THE GUILFORD LAND RECORDS.
 - REFERENCE IS MADE TO AN ASSIGNMENT OF LEASE AND NOTICE OF LEASE AS RECORDED IN VOLUME 691, PAGE 1049 OF THE GUILFORD LAND RECORDS.
 - REFERENCE IS MADE TO A TERMINATION OF LEASE AND NOTICE OF LEASE AS RECORDED IN VOLUME 691, PAGE 1049 OF THE GUILFORD LAND RECORDS.
 - REFERENCE IS MADE TO A NOTICE OF LEASE AS RECORDED IN VOLUME 691, PAGE 1049 OF THE GUILFORD LAND RECORDS.
 - UNDERGROUND UTILITY STRUCTURE AND FACILITY LOCATIONS SHOWN HEREON HAVE BEEN COMPILED IN PART FROM RECORD DRAWINGS AND OTHER DATA SUPPLIED BY THE RESPECTIVE UTILITY COMPANIES, GOVERNMENTAL AGENCIES AND/OR OTHER SOURCES. THESE LOCATIONS MUST BE CORROBORATED APPROPRIATELY IN NATURE. ADDITIONAL COVER SHEET FEATURES MAY EXIST ON THE SITE. THE EXISTENCE OF WHICH ARE UNKNOWN TO THIS SURVEYOR AT THE TIME OF THE SURVEY AND LOCATION OF ALL SUCH FEATURES MUST BE DETERMINED AND VERIFIED IN THE FIELD BY THE APPROPRIATE AUTHORITY PRIOR TO CONSTRUCTION. CALL BEFORE YOU DIG 1-800-422-4433.




5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY:	CHECKED BY:	APPROVED BY:
RK	BEH	BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437


SHEET TITLE
SITE SURVEY

SHEET NUMBER
LS-1


TO MY KNOWLEDGE AND BELIEF THIS MAP IS SUBSTANTIALLY CORRECT AS NOTED HEREON.		Enclosed with	
MICHAEL S. NEWELL, L.L.C. LICENSE NO. 14584			
TRUE AND VALID COPIES OF THIS MAP OR PLAN MUST BEAR THE ORIGINAL SIGNATURE AND EMBOSSED SEAL OF THE ABOVE NAMED LAND SURVEYOR. UNAUTHORIZED REPRODUCTION OR ALTERATION IS FORBIDDEN.		Scale: 1" = 20' Date: January 2022 Project: 149543-001 Sheet: 4136 Drawn by: A.Benhet Checked by: G.Szyrakowski Date: 2022/7/14 Rev: 1108-3	

NOTES

1. CONTRACTOR SHALL FIELD VERIFY ALL PROPOSED UNDERGROUND UTILITY CONDUIT ROUTE.
2. ANTENNAS AND MOUNTS OMITTED FOR CLARITY.

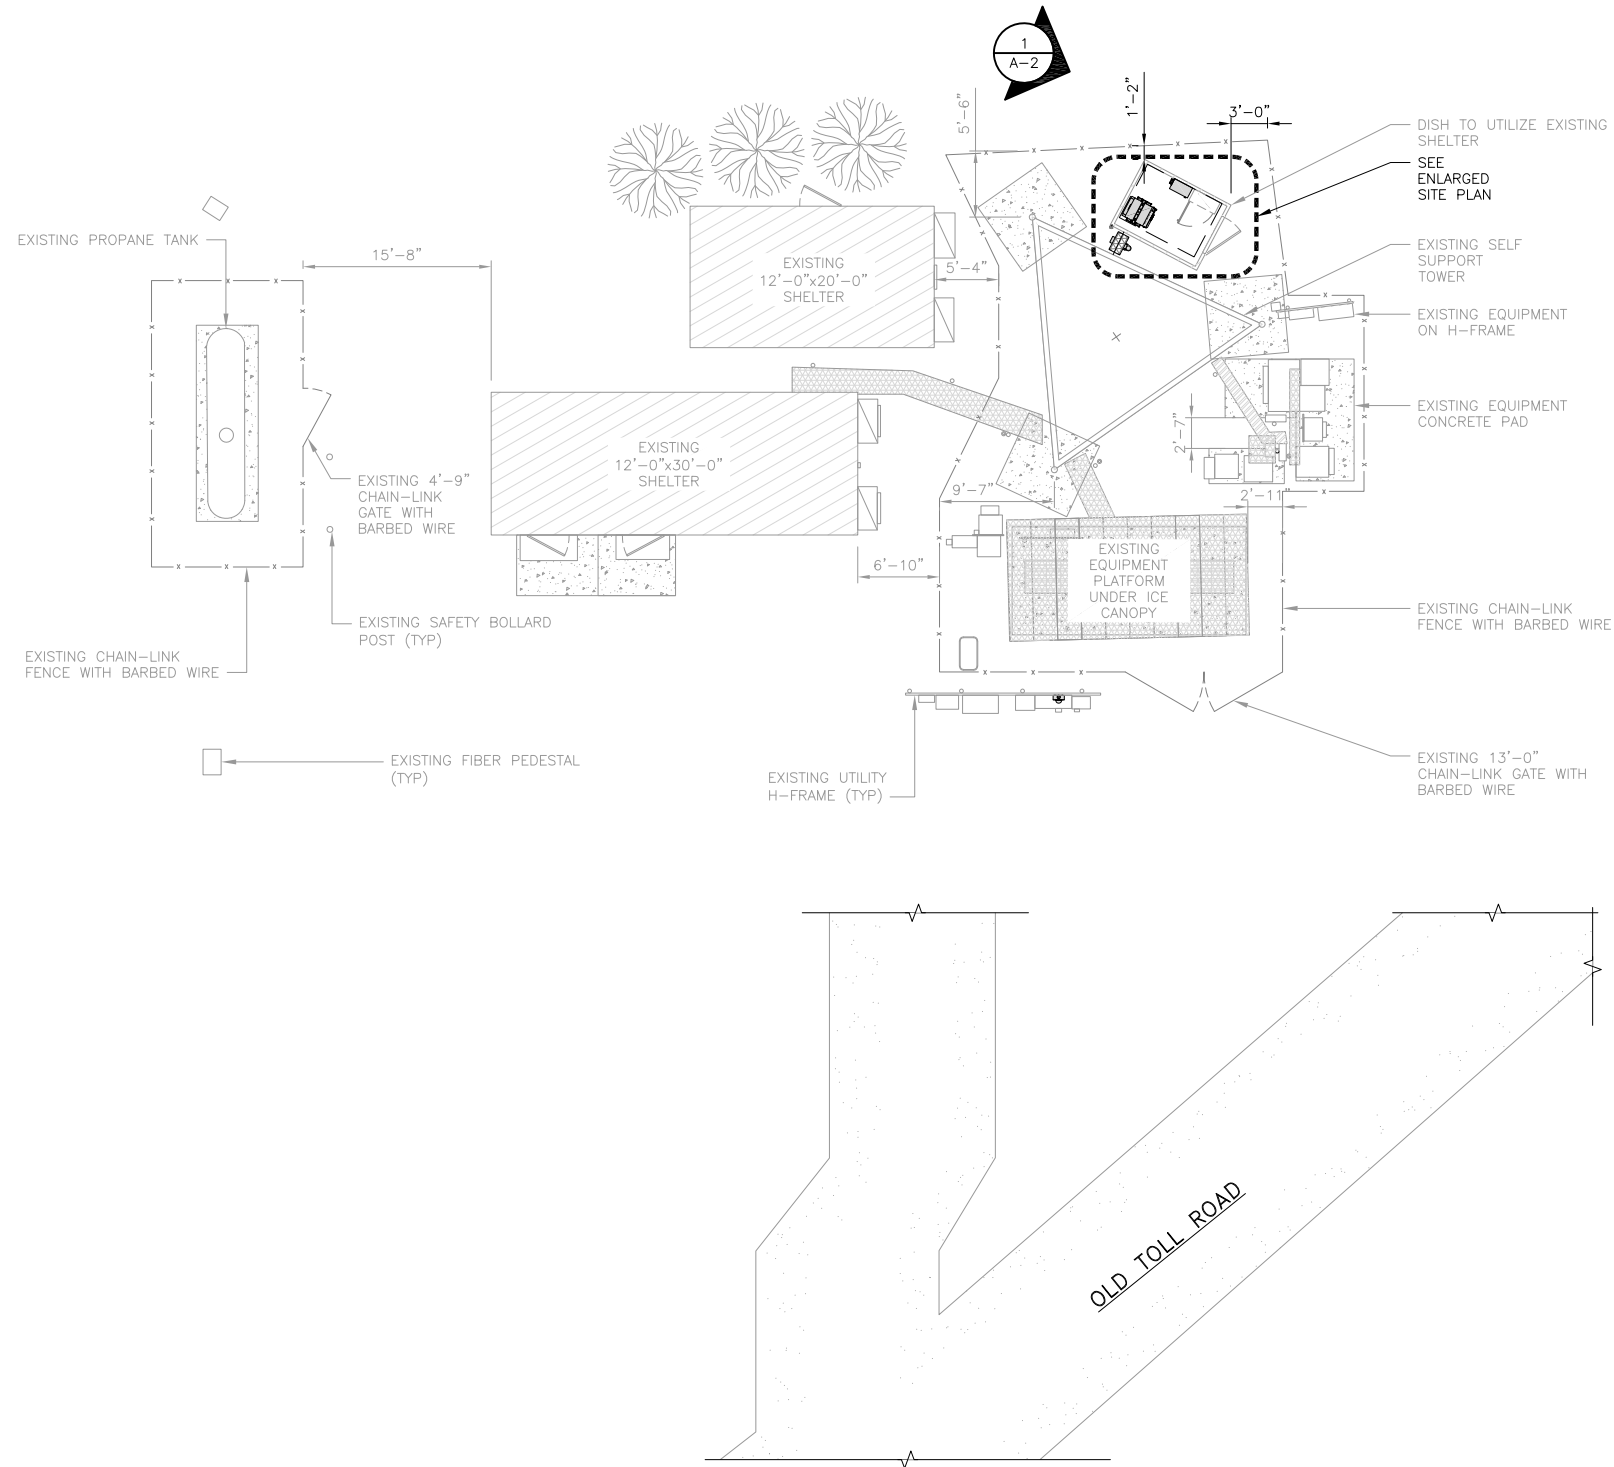


OVERALL SITE PLAN



1

NOTES

1. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS.
2. CONTRACTOR SHALL MAINTAIN A 10'-0" MINIMUM SEPARATION BETWEEN THE PROPOSED GPS UNIT, TRANSMITTING ANTENNAS AND EXISTING GPS UNITS.
3. ANTENNAS AND MOUNTS OMITTED FOR CLARITY.

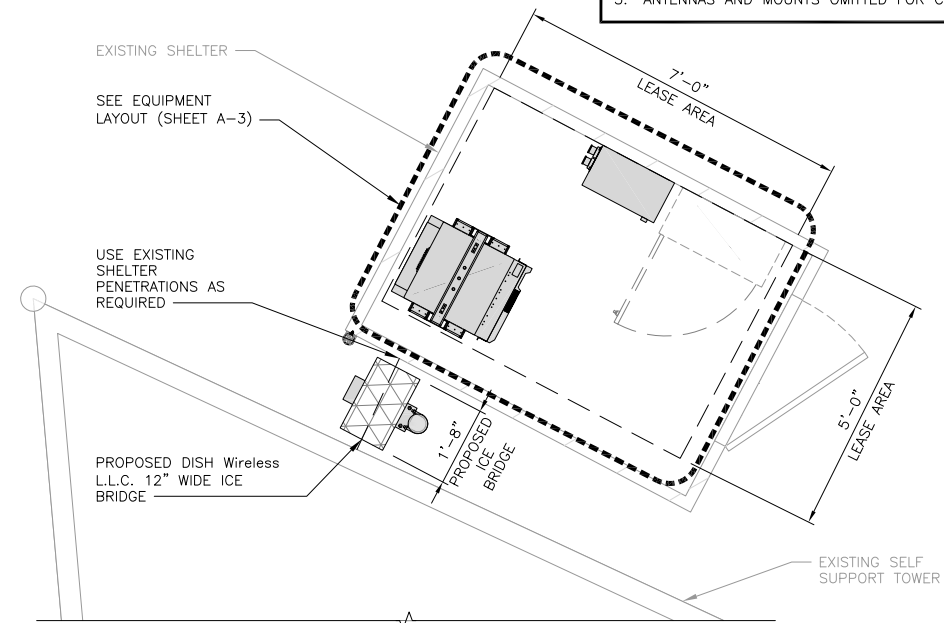

ENLARGED SITE PLAN



2



AERIAL PLAN

NO SCALE

3

dish
wireless.

5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com

7/13/22



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY:	CHECKED BY:	APPROVED BY:
RK	BEH	BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437


SHEET TITLE
OVERALL AND ENLARGED
SITE PLAN

SHEET NUMBER


A-1

NOTES


1. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS.
2. ANTENNA AND MW DISH SPECIFICATIONS REFER TO ANTENNA SCHEDULE AND TO FINAL CONSTRUCTION RFDS FOR ALL RF DETAILS
3. EXISTING EQUIPMENT AND FENCE OMITTED FOR CLARITY.

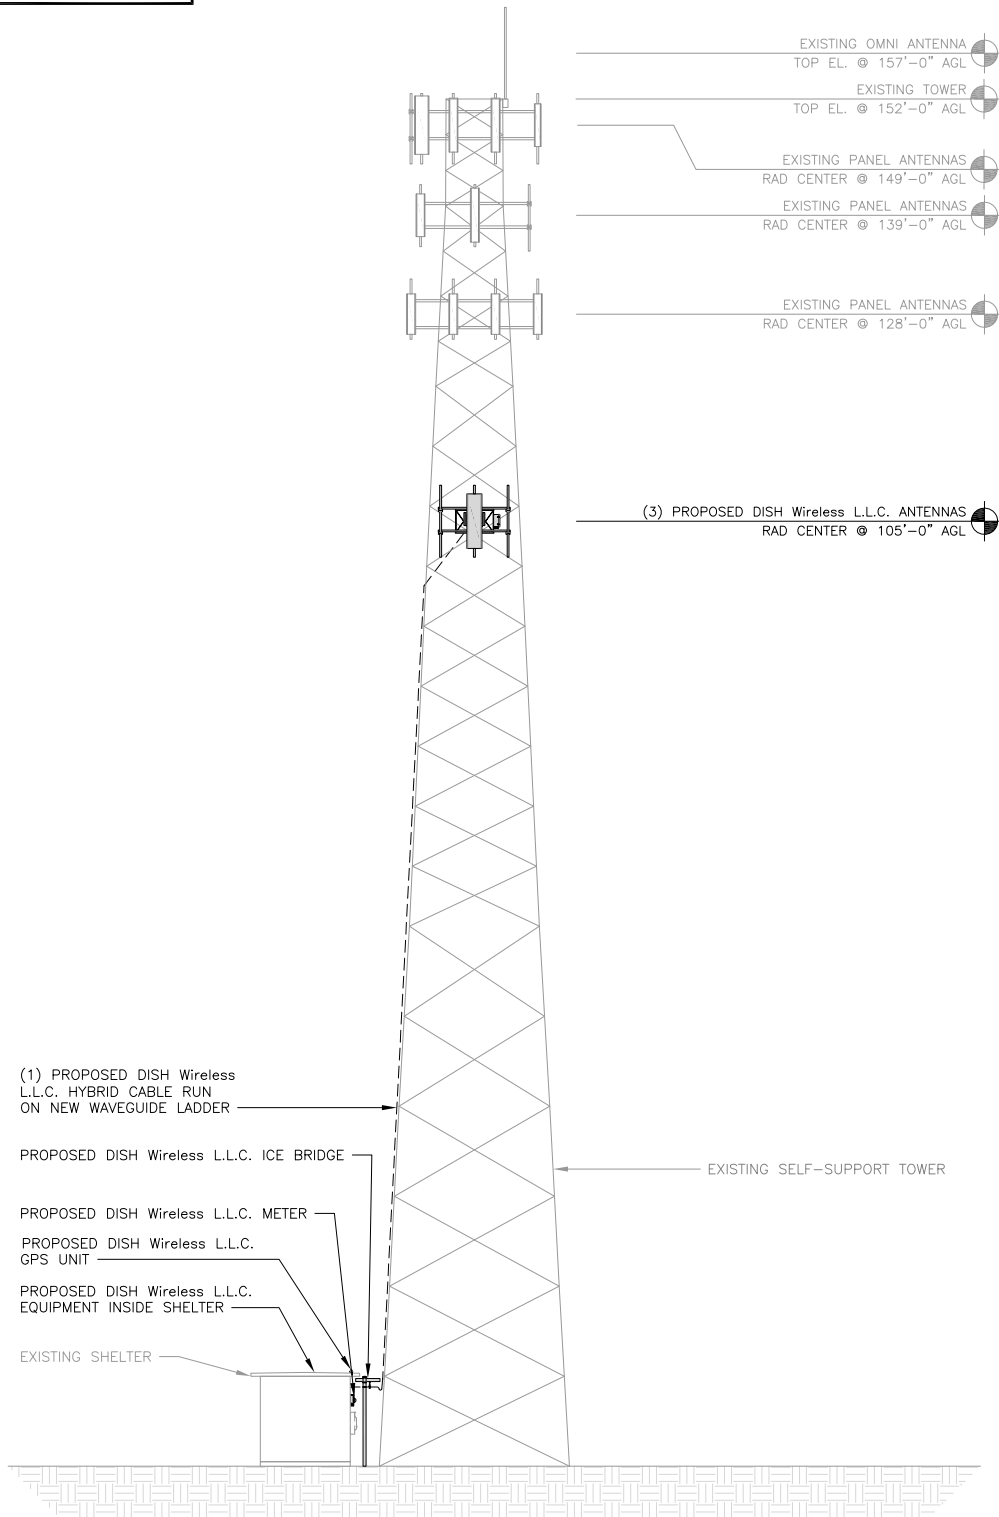


PROPOSED NORTH WEST ELEVATION



1

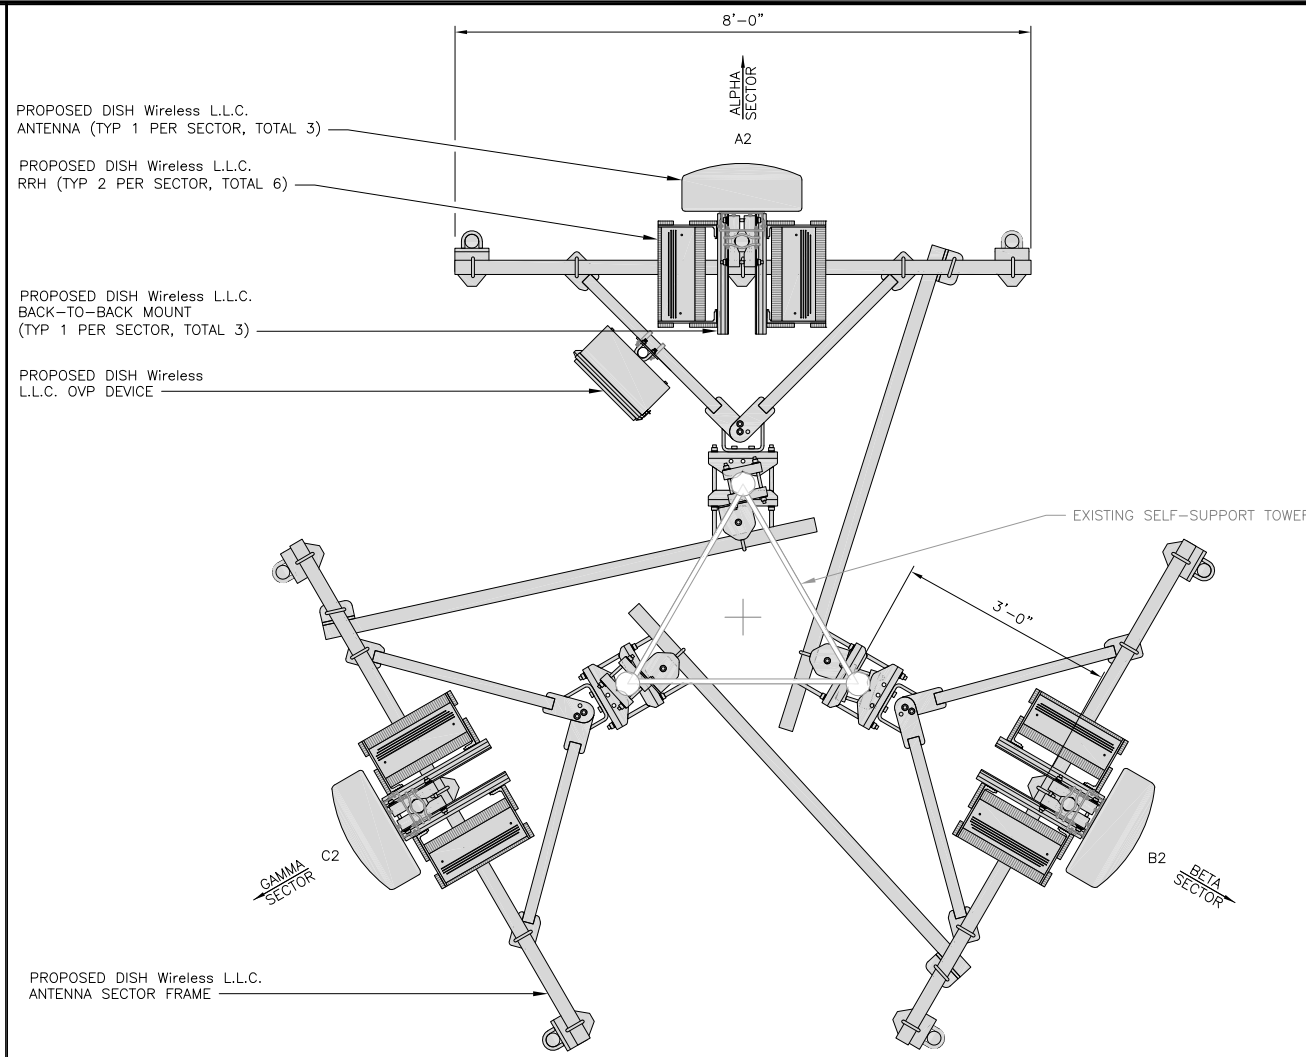

WIDTH OF TOWER FACE IS NOT TO BE CONSIDERED TO SCALE



2

ANTENNA LAYOUT

SECTOR POS.	ANTENNA					TRANSMISSION CABLE	RRH			OVP
	EXISTING OR PROPOSED	MANUFACTURER - MODEL NUMBER	TECH	AZIMUTH	RAD CENTER		FEED LINE TYPE AND LENGTH	MANUFACTURER - MODEL NUMBER	TECH	
A1	--	--	--	--	--	(1) HIGH-CAPACITY HYBRID CABLE (140' LONG)	FUJITSU- TA08025-B604	5G	A2	RAYCAP RDIDC-9181-PF-48
A2	PROPOSED	JMA - MX08FRO665-21	5G	0°	105'-0"		FUJITSU- TA08025-B605	5G	A2	
A3	--	--	--	--	--		--	--	--	
B1	--	--	--	--	--	SHARED W/ALPHA	FUJITSU- TA08025-B604	5G	B2	SHARED W/ALPHA
B2	PROPOSED	JMA - MX08FRO665-21	5G	120°	105'-0"		FUJITSU- TA08025-B605	5G	B2	
B3	--	--	--	--	--		--	--	--	
C1	--	--	--	--	--	SHARED W/ALPHA	FUJITSU- TA08025-B604	5G	C2	SHARED W/ALPHA
C2	PROPOSED	JMA - MX08FRO665-21	5G	240°	105'-0"		FUJITSU- TA08025-B605	5G	C2	
C3	--	--	--	--	--		--	--	--	

- NOTES**
1. CONTRACTOR TO REFER TO FINAL CONSTRUCTION RFDS FOR ALL RF DETAILS.
 2. ANTENNA AND RRH MODELS MAY CHANGE DUE TO EQUIPMENT AVAILABILITY. ALL EQUIPMENT CHANGES MUST BE APPROVED AND REMAIN IN COMPLIANCE WITH THE PROPOSED DESIGN AND STRUCTURAL ANALYSES.

ANTENNA SCHEDULE

NO SCALE


3




5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY: CHECKED BY: APPROVED BY:
RK BEH BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS


REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01


DISH Wireless L.L.C. PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD (RT-80)
GUILFORD, CT 06437

SHEET TITLE
ELEVATION, ANTENNA LAYOUT AND SCHEDULE

SHEET NUMBER
A-2

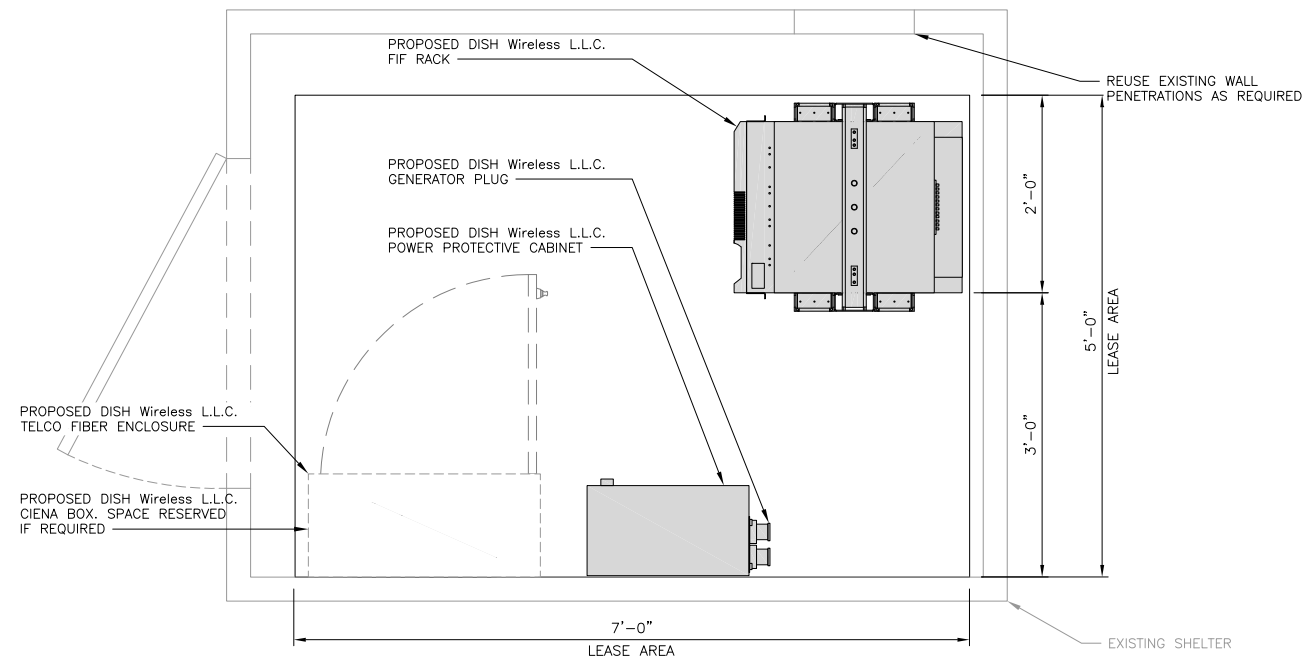

EQUIPMENT PLAN



1

NOT USED

NO SCALE

2

NOT USED

NO SCALE

3

NOT USED

NO SCALE

4

NOT USED

NO SCALE

5

NOTES

1. CONTRACTOR TO BURY PLATFORM FEET WITH A MINIMUM OF 2" OF FILL PER EXISTING SITE SURFACE
2. WEED BARRIER FABRIC TO BE ADDED AT DISCRETION OF DISH Wireless L.L.C. CONSTRUCTION MANAGER AT TIME OF CONSTRUCTION. ONE SHEET 8'x8' INSTALLED UNDER ALL FOUR FEET OF THE PLATFORM (4 MIL BLACK PLASTIC)
3. EQUIPMENT CABINET OMITTED FOR CLARITY



5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120




8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com

7/13/22



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY:	CHECKED BY:	APPROVED BY:
RK	BEH	BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01


DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
EQUIPMENT PLATFORM AND
H-FRAME DETAILS


SHEET NUMBER

A-3


FIF RACK LOADED	
DIMENSIONS (HxWxD):	83.99"x26"x28.5"
WEIGHT:	±800 lbs



PLAN



SIDE



FRONT

FIF RACK DETAIL


NO SCALE

1

RAYCAP PPC RDIAC-2465-P-240-MTS	
ENCLOSURE DIMENSIONS (HxWxD):	39"x22.855"x12.593
WEIGHT:	80 lbs
OPERATING AC VOLTAGE	240/120 1 PHASE 3W+G




TOP




BACK



SIDE



FRONT



SIDE

POWER PROTECTION CABINET (PPC) DETAIL

NO SCALE


2

NOT USED


NO SCALE

3


CIENA 3931 FIBER NID ENCLOSURE	
DIMENSIONS (HxWxD)	17"x16.8"x7"
WEIGHT	28.6 lbs



TOP



SIDE




FRONT

FIBER NID ENCLOSURE DETAIL


NO SCALE

5


CHARLES CFIT-PF2020DSH1 FIBER TELCO ENCLOSURE	
ENCLOSURE DIMS (HxWxD)	20"x20"x9"
ENCLOSURE WEIGHT	20 lbs
MOUNTING	WALL
COMPLIANCE	TYPE 4




FRONT



SIDE



BACK




FRONT

FIBER TELCO ENCLOSURE DETAIL


NO SCALE

6

COMMSCOPE WB-K110-B WAVEGUIDE BRIDGE KIT		INCLUDED PRODUCTS: WB-T12-3 TRAPEZE KIT, 3 RUNGS WB-LB12-3 SUPPORT BRACKET MF-130 DIRECT BURIAL PIPE COLUMN, 13'-4"
DIMENSIONS (HxL)	160"x10'	
WEIGHT/ VOLUME	325.0 LBS	
CABLE RUN (QTY)	12	



PLAN

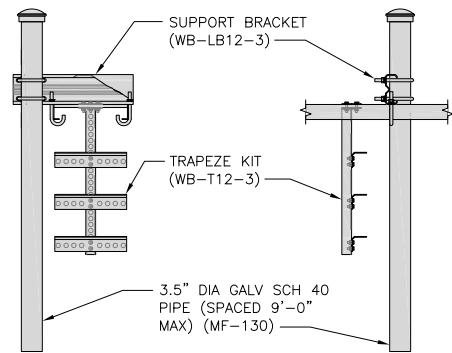


FRONT

SIDE

ICE BRIDGE DETAIL

NO SCALE


7

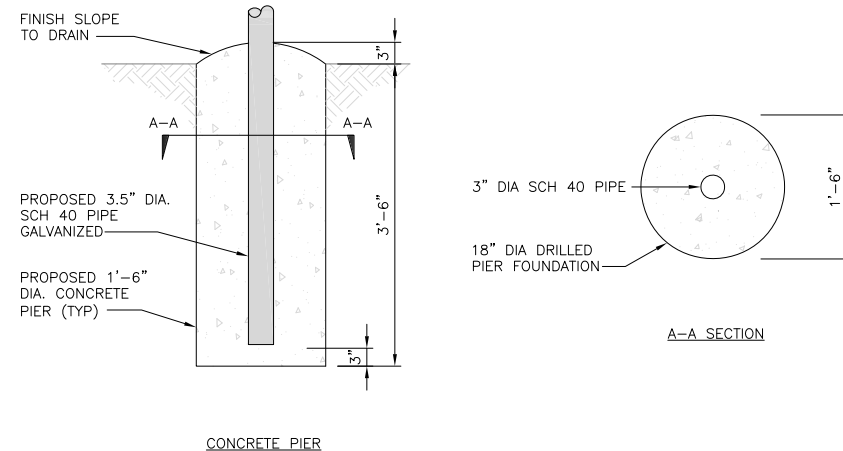

TYPICAL ICE BRIDGE CONCRETE PIER DETAIL

NO SCALE

8

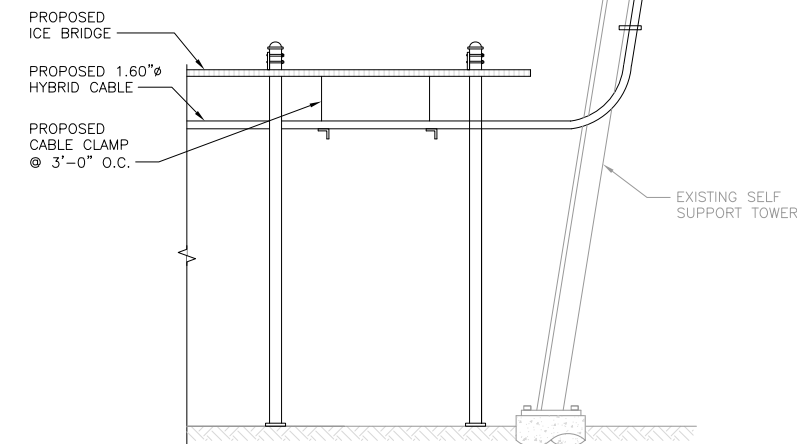

HYBRID CABLE RUN

NO SCALE

9

dish
wireless.

5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.blgrp.com

7/13/22



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY:	CHECKED BY:	APPROVED BY:
RK	BEH	BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01


DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
EQUIPMENT DETAILS


SHEET NUMBER

A-4


PCTEL GPSGL-TMG-SPI-40NCB	
DIMENSIONS (DIAxH) MM/INCH	81x184mm 3.2"x7.25"
WEIGHT W/ACCESSORIES	075 lbs
CONNECTOR	N-FEMALE
FREQUENCY RANGE	1590 ± 30MHz





TOP



BACK



SIDE

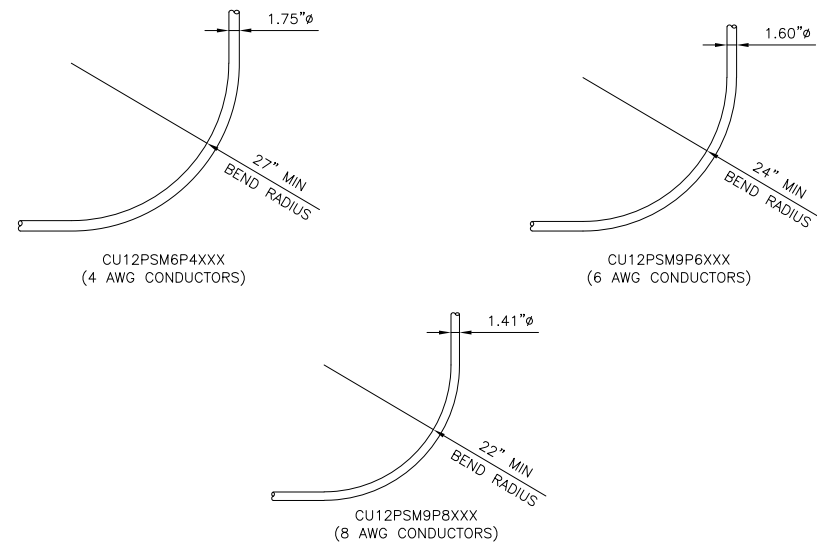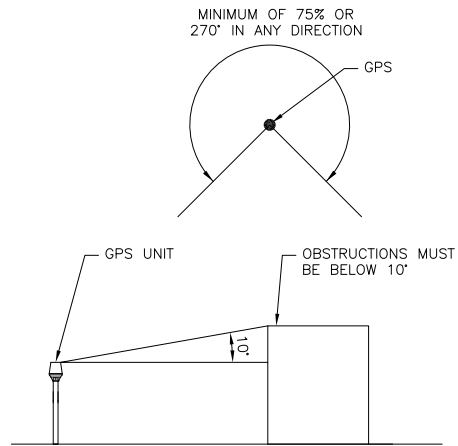

GPS DETAIL

NO SCALE

1

GPS MINIMUM SKY VIEW REQUIREMENTS

NO SCALE

2

CABLES UNLIMITED HYBRID CABLE
MINIMUM BEND RADIUSES

NO SCALE

3

NOT USED

NO SCALE

4

NOT USED

NO SCALE

5

NOT USED

NO SCALE

6

NOT USED

NO SCALE

7

NOT USED

NO SCALE

8

NOT USED

NO SCALE

9

dish
wireless.


5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com



IT IS A VIOLATION OF LAW FOR ANY PERSON,
UNLESS THEY ARE ACTING UNDER THE DIRECTION
OF A LICENSED PROFESSIONAL ENGINEER,
TO ALTER THIS DOCUMENT.

DRAWN BY: RK
CHECKED BY: BEH
APPROVED BY: BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION





A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
EQUIPMENT DETAILS

SHEET NUMBER
A-5

FUJITSU TRIPLE BAND TA08025-B605	
DIMENSIONS (HxWxD)	14.9"x15.7"x9"
WEIGHT	74.95 lbs
CONNECTOR TYPE	4.3-10 RF CONNECTOR
POWER SUPPLY	DC -58~-36V



BACK

SIDE





FRONT

RRH DETAIL

NO SCALE

1

FUJITSU DUAL BAND TA08025-B604	
DIMENSIONS (HxWxD)	14.9"x15.7"x7.8"
WEIGHT	63.9 lbs
CONNECTOR TYPE	4.3-10 RF CONNECTOR
POWER SUPPLY	DC -58~-36V



BACK

SIDE

FRONT

RRH DETAIL

NO SCALE


2

COMMSCOPE RR-FA2 LARGE STABILIZER	
DIMENSIONS (HxWxD)	16.4"x8.5"x18"
WEIGHT	39.2 lbs

DESIGN NOTES:
MOUNT WILL FIT LEGS UP TO:
- 5.6" ROUND
- 6.0" 60° ANGLE
- 4.5" 90° ANGLE



PLAN

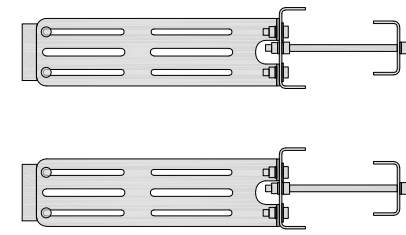

SIDE



NOTE:
OR DISH Wireless L.L.C.
APPROVED EQUIVALENT

RRH MOUNT DETAIL

NO SCALE

3

JMA MX08FRO665-21	
DIMENSIONS (HxWxD)	72"x20.0"x8.0"
RF PORTS, CONNECTOR TYPE	8 x 4.3-10 FEMALE
WEIGHT	64.5 lbs
WEIGHT WITH BRACKETS	82.5 lbs







FRONT

ANTENNA DETAIL

NO SCALE

4

RAYCAP RDIC-9181-PF-48 DC SURGE PROTECTION (OVP)	
DIMENSIONS (HxWxD)	18.98"x14.39"x8.15"
WEIGHT	21.82 LBS



SIDE

BACK

FRONT


SURGE SUPPRESSION DETAIL (OVP)

NO SCALE

7

COMMSCOPE 20' CABLE LADDER 6 HOLE RUNGS	
DIMENSIONS (WxL)	20.5"x240"
WEIGHT	84.94 lbs

ITEM#	DESCRIPTION
1	20' ANGLE SIDE RAIL
2	20" LADDER RUNG
3	BACKING PLATE
4	3/8"x1-1/2" GALV BOLT KIT
5	8" GALV J-BOLT KIT
6	3/8" GALV FLAT WASHER
7	3/8" GALV LOCK WASHER
8	3/8" GALV HEX NUT

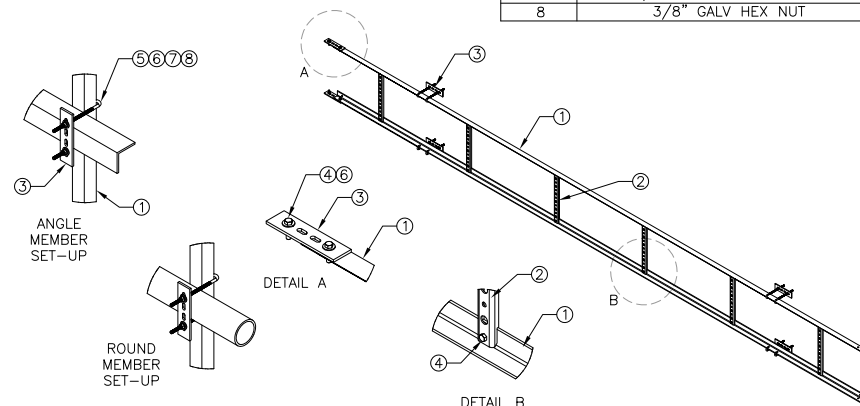


CABLE LADDER DETAIL

NO SCALE

8

COMMSCOPE V-FRAME MTC3975083	
FACE SIZE	8'-0"
WEIGHT	352.136 lbs

NOTE:
OR DISH Wireless L.L.C.
APPROVED EQUIVALENT

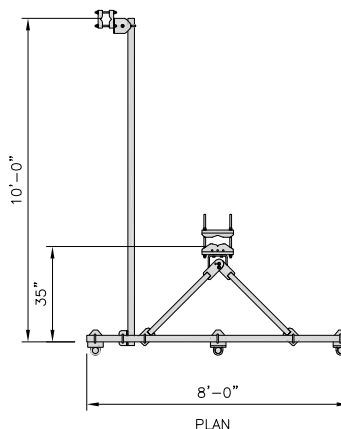


ANTENNA FRAME DETAIL

NO SCALE

9

JMA ANTENNA MOUNT BRACKET #91900318	
TOTAL WEIGHT (WITH BRACKETS)	18 lbs (8.18 Kg)
POLE DIAMETER RANGE	2.5" TO 4.5"

NOTE:
KIT #91900318: TOP AND BOTTOM BRACKETS
FOR 4-, 6-, AND 8-FOOT ANTENNAS
ANTENNA BRACKET NOT PART OF KIT

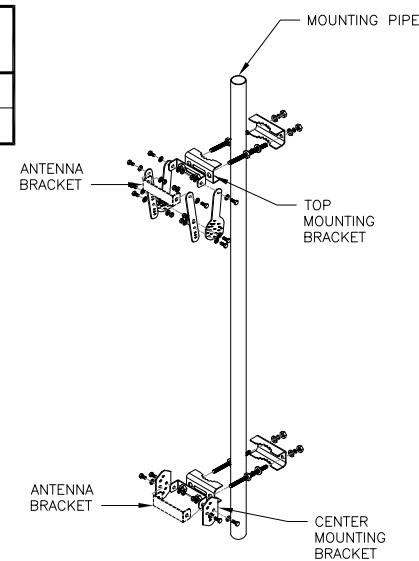

NOTE:
OR DISH Wireless L.L.C.
APPROVED EQUIVALENT

ANTENNA BRACKET DETAIL

NO SCALE

6



5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com

7/13/22



IT IS A VIOLATION OF LAW FOR ANY PERSON,
UNLESS THEY ARE ACTING UNDER THE DIRECTION
OF A LICENSED PROFESSIONAL ENGINEER,
TO ALTER THIS DOCUMENT.

DRAWN BY: CHECKED BY: APPROVED BY:

RK BEH BEH

RFDS REV #: 1.0

CONSTRUCTION
DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
EQUIPMENT DETAILS

SHEET NUMBER

A-6

STIFF ARM LOCATION NOTES:

- TIE BACK SHALL BE CONNECTED PER MANUFACTURER SPECIFICATIONS. IF THE ANGLE OF ATTACHMENT DEVIATES FROM THE MANUFACTURER RANGES, A SITE SPECIFIC ANALYSIS THAT CONSIDERS THESE EFFECTS ON BOTH THE TOWER AND THE MOUNT WILL BE NEEDED.
- ACCEPTABLE STIFF ARM TO TOWER MEMBER ATTACHMENT LOCATIONS:
 - A) INTERIOR BRACING MEMBERS:
 - WITHIN 25% OF EITHER END OF THE MEMBER'S LENGTH.
 - B) TOWER LEGS:
 - WITHIN 25% OF EITHER END OF THE MEMBER'S LENGTH. IF ATTACHMENT IS NOT WITHIN 25% OF EITHER END OF THE MEMBERS LENGTH THEN ADJUST ATTACHMENT POINT TO MINIMIZE DISTANCE TO END OF MEMBER WHILE FOLLOWING MANUFACTURERS SPECIFICATIONS.




INTERIOR BRACING

- ACCEPTABLE ATTACHMENT REGION & FORCE
- ACCEPTABLE ATTACHMENT REGION & FORCE
- DO NOT ATTACH HERE



TOWER LEG

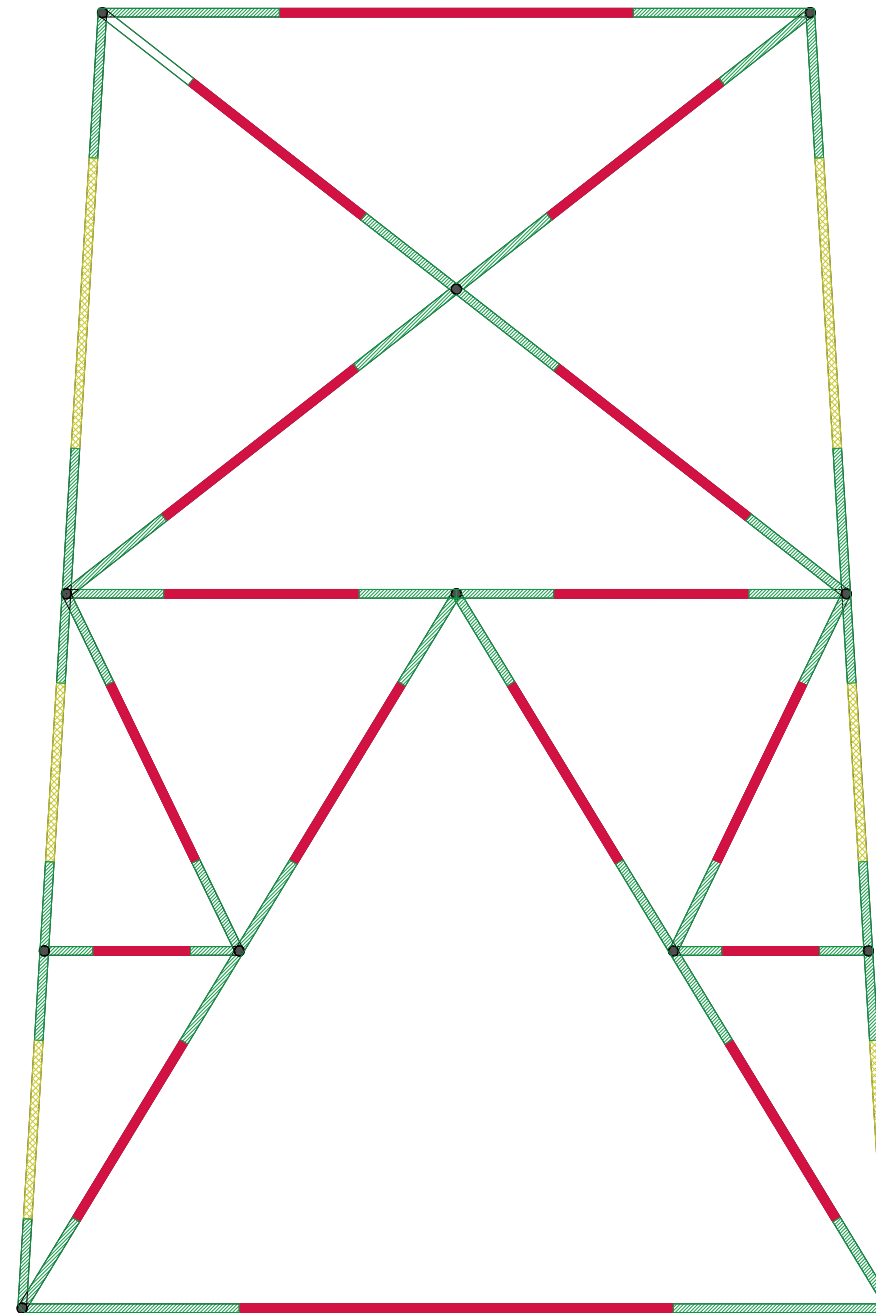

TOWER SECTION

STIFF ARM LOCATIONS

NO SCALE

1



5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com

7/13/22



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY:	CHECKED BY:	APPROVED BY:
RK	BEH	BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
STIFF ARM
LOCATION DETAIL

SHEET NUMBER



A-7

NOTES


1. CONTRACTOR SHALL FIELD VERIFY ALL PROPOSED UNDERGROUND UTILITY CONDUIT ROUTE.
2. ANTENNAS AND MOUNTS OMITTED FOR CLARITY.
3. THE GROUND LEASE PROVIDES BROAD/BLANKET UTILITY RIGHTS. "PWR" AND "FBR" PATH DEPICTED ON A-1 AND E-1 ARE BASED ON BEST AVAILABLE INFORMATION INCLUDING BUT NOT LIMITED TO FIELD VERIFICATION, PRIOR PROJECT DOCUMENTATION AND OTHER REAL PROPERTY RIGHTS DOCUMENTS. WHEN INSTALLING THE UTILITIES PLEASE LOCATE AND FOLLOW EXISTING PATH. IF EXISTING PATH IS NOT AN OPTION, PLEASE NOTIFY TOWER OWNER AS FURTHER COORDINATION MAY BE NEEDED.

DC POWER WIRING SHALL BE COLOR CODED AT EACH END FOR IDENTIFYING +24V AND -48V CONDUCTORS. RED MARKINGS SHALL IDENTIFY +24V AND BLUE MARKINGS SHALL IDENTIFY -48V.

1. CONTRACTOR SHALL INSPECT THE EXISTING CONDITIONS PRIOR TO SUBMITTING A BID. ANY QUESTIONS ARISING DURING THE BID PERIOD IN REGARDS TO THE CONTRACTOR'S FUNCTIONS, THE SCOPE OF WORK, OR ANY OTHER ISSUE RELATED TO THIS PROJECT SHALL BE BROUGHT UP DURING THE BID PERIOD WITH THE PROJECT MANAGER FOR CLARIFICATION, NOT AFTER THE CONTRACT HAS BEEN AWARDED.
2. ALL ELECTRICAL WORK SHALL BE DONE IN ACCORDANCE WITH CURRENT NATIONAL ELECTRICAL CODES AND ALL STATE AND LOCAL CODES, LAWS, AND ORDINANCES. PROVIDE ALL COMPONENTS AND WIRING SIZES AS REQUIRED TO MEET NEC STANDARDS.
3. LOCATION OF EQUIPMENT, CONDUIT AND DEVICES SHOWN ON THE DRAWINGS ARE APPROXIMATE AND SHALL BE COORDINATED WITH FIELD CONDITIONS PRIOR TO CONSTRUCTION.
4. CONDUIT ROUGH-IN SHALL BE COORDINATED WITH THE MECHANICAL EQUIPMENT TO AVOID LOCATION CONFLICTS. VERIFY WITH THE MECHANICAL EQUIPMENT CONTRACTOR AND COMPLY AS REQUIRED.
5. CONTRACTOR SHALL PROVIDE ALL BREAKERS, CONDUITS AND CIRCUITS AS REQUIRED FOR A COMPLETE SYSTEM.
6. CONTRACTOR SHALL PROVIDE PULL BOXES AND JUNCTION BOXES AS REQUIRED BY THE NEC ARTICLE 314.
7. CONTRACTOR SHALL PROVIDE ALL STRAIN RELIEF AND CABLE SUPPORTS FOR ALL CABLE ASSEMBLIES. INSTALLATION SHALL BE IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS AND RECOMMENDATIONS.
8. ALL DISCONNECTS AND CONTROLLING DEVICES SHALL BE PROVIDED WITH ENGRAVED PHENOLIC NAMEPLATES INDICATING EQUIPMENT CONTROLLED, BRANCH CIRCUITS INSTALLED ON, AND PANEL FIELD LOCATIONS FED FROM.
9. INSTALL AN EQUIPMENT GROUNDING CONDUCTOR IN ALL CONDUITS PER THE SPECIFICATIONS AND NEC 250. THE EQUIPMENT GROUNDING CONDUCTORS SHALL BE BONDED AT ALL JUNCTION BOXES, PULL BOXES, AND ALL DISCONNECT SWITCHES, AND EQUIPMENT CABINETS.
10. ALL NEW MATERIAL SHALL HAVE A U.L. LABEL.
11. PANEL SCHEDULE LOADING AND CIRCUIT ARRANGEMENTS REFLECT POST-CONSTRUCTION EQUIPMENT.
12. CONTRACTOR SHALL BE RESPONSIBLE FOR AS-BUILT PANEL SCHEDULE AND SITE DRAWINGS.
13. ALL TRENCHES IN COMPOUND TO BE HAND DUG

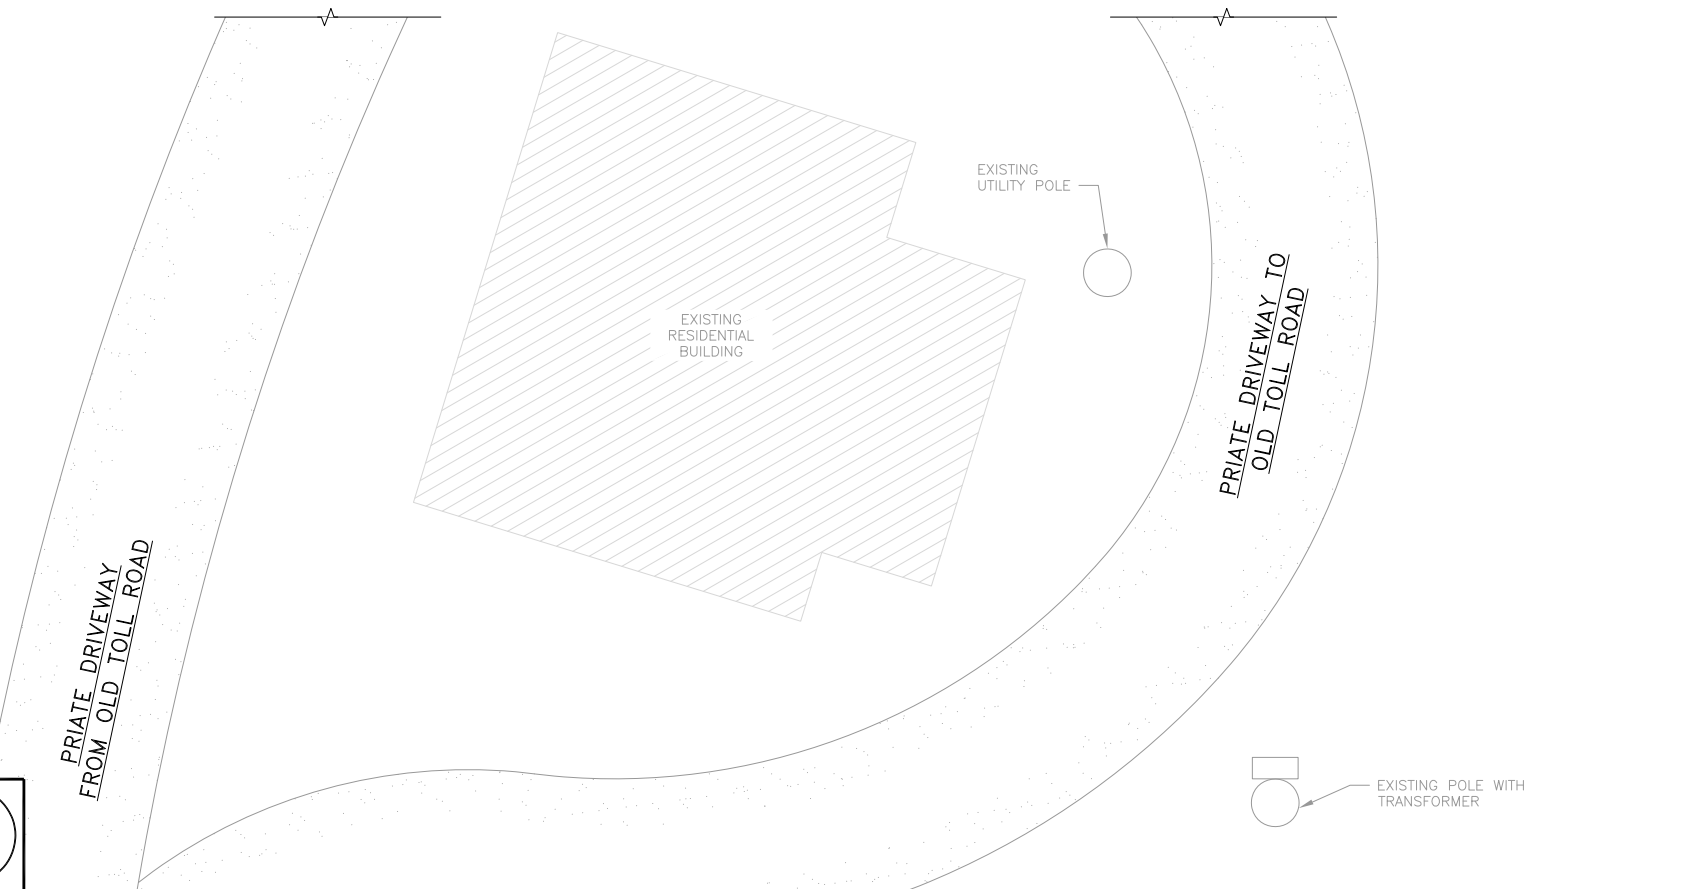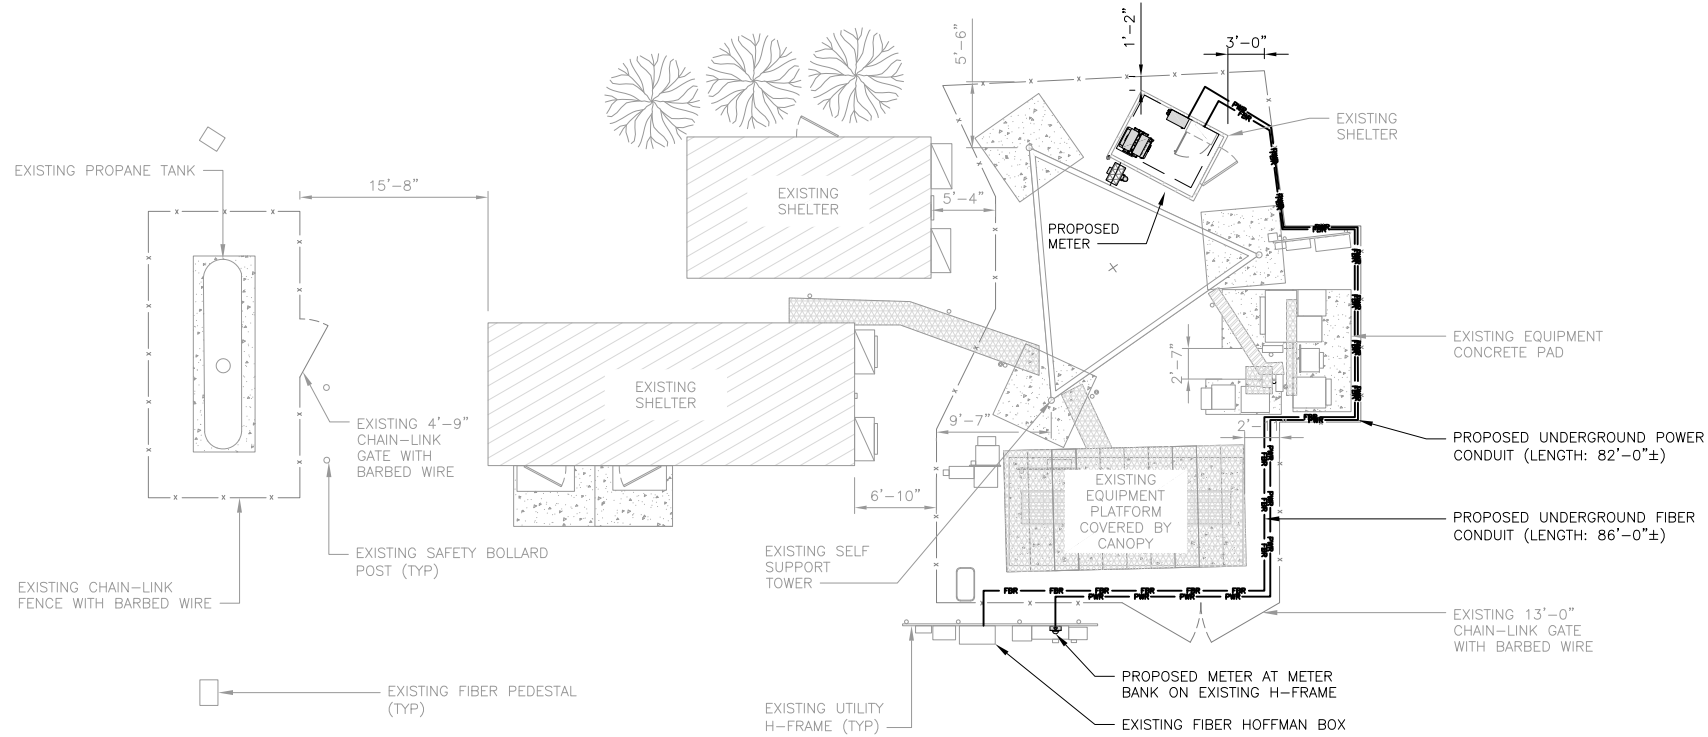

UTILITY ROUTE PLAN



1

ELECTRICAL NOTES

NO SCALE

2



5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com

7/13/22



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY: CHECKED BY: APPROVED BY:

RK BEH BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437


SHEET TITLE
**ELECTRICAL/FIBER ROUTE
PLAN AND NOTES**

SHEET NUMBER

E-1

CARLON EXPANSION FITTINGS



COUPLING END PART#	MALE TERMINAL ADAPTER END PART#	SIZE	STD CTN QTY.	TRAVEL LENGTH
E945D	E945DX	1/2"	20	4"
E945E	E945EX	3/4"	15	4"
E945F	E945FX	1"	10	4"
E945G	E945GX	1 1/4"	5	4"
E945H	E945HX	1 1/2"	5	4"
E945J	E945JX	2"	15	8"
E945K	E945KX	2 1/2"	10	8"
E945L	E945LX	3"	10	8"
E945M	E945MX	3 1/2"	5	8"
E945N	E945NX	4"	5	8"
E945P	E945PX	5"	1	8"
E945R	E945RX	6"	1	8"

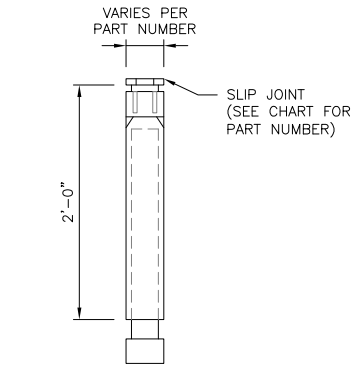

NOTE: CONTRACTOR TO INSTALL EXPANSION FITTING SLIP JOINT AT METER CENTER CONDUIT TERMINATION, AS PER LOCAL UTILITY POLICY, ORDINANCE AND/OR SPECIFIED REQUIREMENT.

TRENCHING NOTES

- CONTRACTOR SHALL RESTORE THE TRENCH TO ITS ORIGINAL CONDITIONS BY EITHER SEEDING OR SODDING GRASS AREAS, OR REPLACING ASPHALT OR CONCRETE AREAS TO ITS ORIGINAL CROSS SECTION.
- TRENCHING SAFETY; INCLUDING, BUT NOT LIMITED TO SOIL CLASSIFICATION, SLOPING, AND SHORING, SHALL BE GOVERNED BY THE CURRENT OSHA TRENCHING AND EXCAVATION SAFETY STANDARDS.
- ALL CONDUITS SHALL BE INSTALLED IN COMPLIANCE WITH THE CURRENT NATIONAL ELECTRIC CODE (NEC) OR AS REQUIRED BY THE LOCAL JURISDICTION, WHICHEVER IS THE MOST STRINGENT.

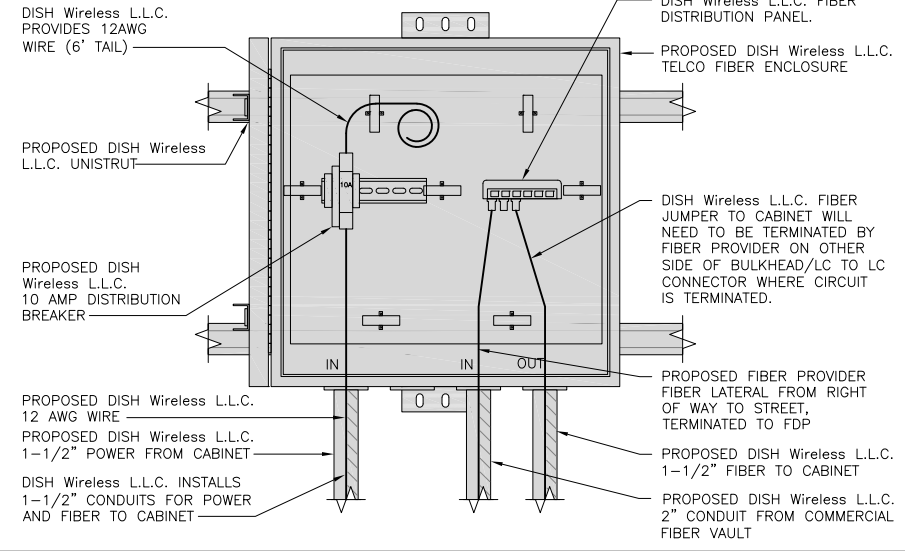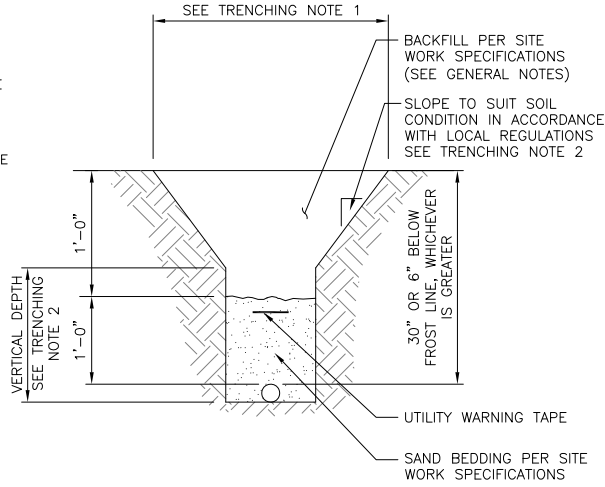

EXPANSION JOINT DETAIL


NO SCALE 1

TYPICAL UNDERGROUND TRENCH DETAIL

NO SCALE 2

DARK TELCO BOX – INTERIOR WIRING LAYOUT

NO SCALE 3

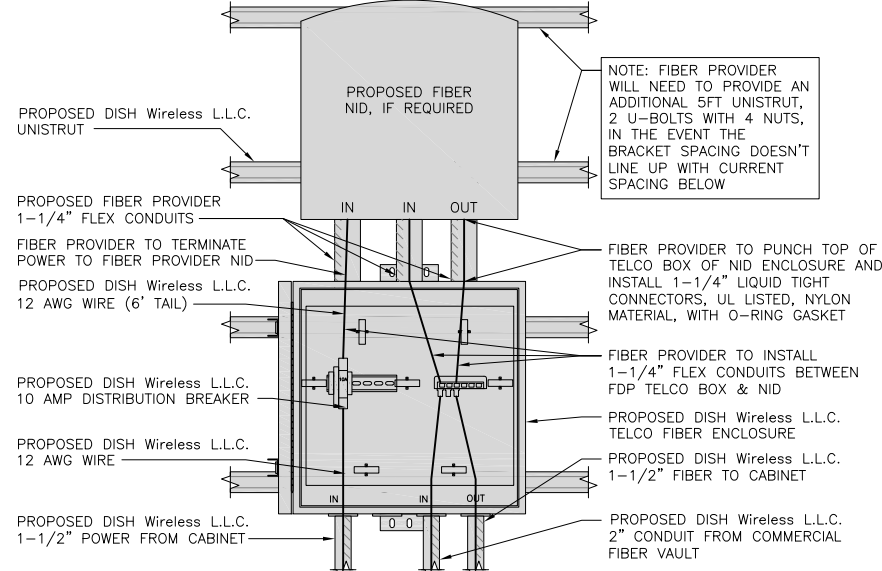

LIT TELCO BOX – INTERIOR WIRING LAYOUT (OPTIONAL)

NO SCALE 4

NOT USED

NO SCALE 5

NOT USED

NO SCALE 6

NOT USED

NO SCALE 7

NOT USED

NO SCALE 8

NOT USED

NO SCALE 9




5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY: CHECKED BY: APPROVED BY:
RK BEH BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS



SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
ELECTRICAL
DETAILS

SHEET NUMBER
E-2

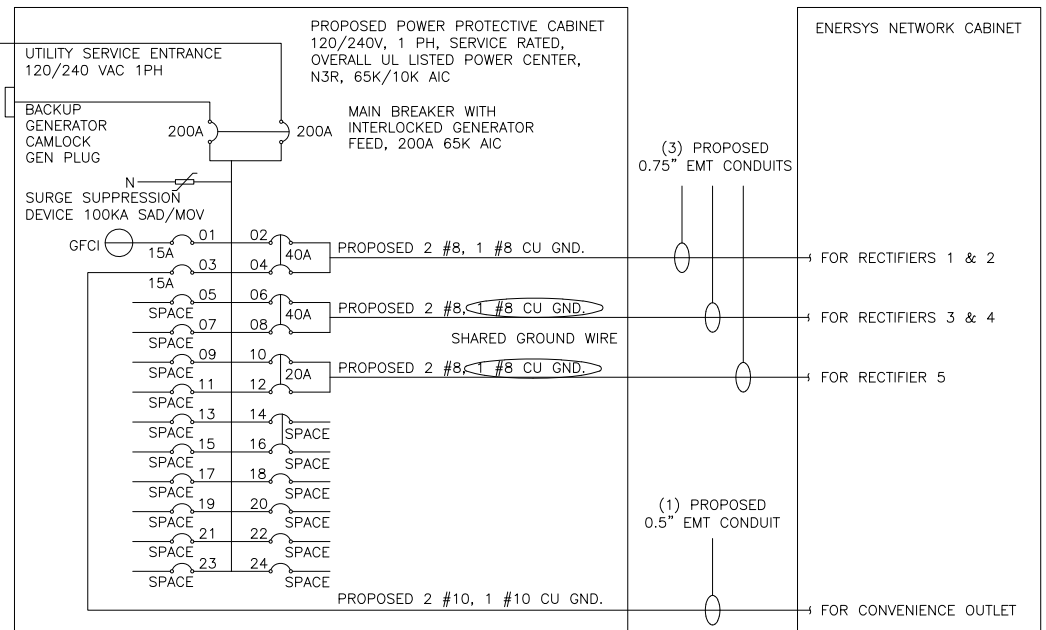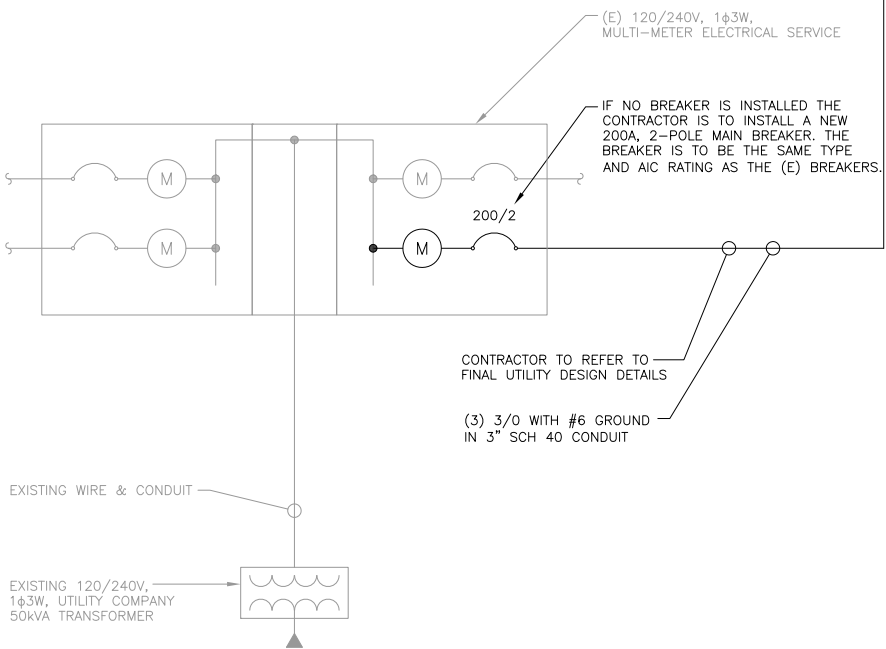

NOTE: BRANCH CIRCUIT WIRING SUPPLYING RECTIFIERS ARE TO BE RATED UL1015, 105°C, 600V, AND PVC INSULATED, IN THE SIZES SHOWN IN THE ONE-LINE DIAGRAM. CONTRACTOR MAY SUBSTITUTE UL1015 WIRE FOR THWN-2 FOR CONVENIENCE OUTLET BRANCH CIRCUIT.

BREAKERS REQUIRED:

(2) 40A, 2P BREAKER - SQUARE D P/N:Q0240

(1) 20A, 2P BREAKER - SQUARE D P/N:Q0220

(1) 20A, 1P BREAKER - SQUARE D P/N:Q0120

NOTES

THE ENGINEER OF RECORD HAS PERFORMED ALL REQUIRED SHORT CIRCUIT CALCULATIONS AND THE AIC RATINGS FOR EACH DEVICE IS ADEQUATE TO PROTECT THE EQUIPMENT AND THE ELECTRICAL SYSTEM.

THE ENGINEER OF RECORD HAS PERFORMED ALL REQUIRED VOLTAGE DROP CALCULATIONS AND ALL BRANCH CIRCUIT AND FEEDERS COMPLY WITH THE NEC (LISTED ON T-1) ARTICLE 210.19(A)(1) FPN NO. 4.

CONDUIT SIZING: AT 40% FILL PER NEC CHAPTER 9, TABLE 4, ARTICLE 358.

0.5" CONDUIT - 0.122 SQ. IN AREA
 0.75" CONDUIT - 0.213 SQ. IN AREA
 2.0" CONDUIT - 1.316 SQ. IN AREA
 3.0" CONDUIT - 2.907 SQ. IN AREA

CABINET CONVENIENCE OUTLET CONDUCTORS (1 CONDUIT): USING THWN-2, CU.

#10 - 0.0211 SQ. IN X 2 = 0.0422 SQ. IN
 #8 - 0.0211 SQ. IN X 1 = 0.0211 SQ. IN <GROUND
 TOTAL = 0.0633 SQ. IN

0.5" EMT CONDUIT IS ADEQUATE TO HANDLE THE TOTAL OF (3) WIRES, INCLUDING GROUND WIRE, AS INDICATED ABOVE.

RECTIFIER CONDUCTORS (3 CONDUITS): USING UL1015, CU.

#8 - 0.0552 SQ. IN X 2 = 0.1103 SQ. IN
 #8 - 0.0131 SQ. IN X 1 = 0.0131 SQ. IN <BARE GROUND
 TOTAL = 0.1234 SQ. IN

0.75" EMT CONDUIT IS ADEQUATE TO HANDLE THE TOTAL OF (3) WIRES, INCLUDING GROUND WIRE, AS INDICATED ABOVE.

PPC FEED CONDUCTORS (1 CONDUIT): USING THWN, CU.

3/0 - 0.2679 SQ. IN X 3 = 0.8037 SQ. IN
 #6 - 0.0507 SQ. IN X 1 = 0.0507 SQ. IN <GROUND
 TOTAL = 0.8544 SQ. IN

3.0" SCH 40 PVC CONDUIT IS ADEQUATE TO HANDLE THE TOTAL OF (4) WIRES, INCLUDING GROUND WIRE, AS INDICATED ABOVE.

dish wireless.

5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



7/13/22

CHAD J. LITTLE
No. 23924
LICENSED PROFESSIONAL ENGINEER
Expired 3/31/23

MTS ENGINEERING P.L.L.C.
BER: 286985

PPC ONE-LINE DIAGRAM

NO SCALE | 1

PROPOSED ENERSYS PANEL SCHEDULE													
LOAD SERVED	VOLT AMPS (WATTS)		TRIP	CKT #	PHASE	CKT #	TRIP	VOLT AMPS (WATTS)		LOAD SERVED			
	L1	L2						L1	L2				
PPC GFCI OUTLET	180	180	15A	1	A	2	40A	3840	3840	ENERSYS ALPHA CORDEX RECTIFIERS 1 & 2			
ENERSYS GFCI OUTLET			15A	3	B	4							
-SPACE-				5	A	6	40A	3840	3840	ENERSYS ALPHA CORDEX RECTIFIER 3 & 4			
-SPACE-				7	B	8							
-SPACE-				9	A	10	20A	1920	1920	ENERSYS ALPHA CORDEX RECTIFIER 5			
-SPACE-				11	B	12							
-SPACE-				13	A	14				-SPACE-			
-SPACE-				15	B	16				-SPACE-			
-SPACE-				17	A	18				-SPACE-			
-SPACE-				19	B	20				-SPACE-			
-SPACE-				21	A	22				-SPACE-			
-SPACE-				23	B	24				-SPACE-			
VOLTAGE AMPS		180	180					9500	9500				
200A MCB, 1 ϕ , 24 SPACE, 120/240V				L1	L2	VOLTAGE AMPS							
MB RATING: 65,000 AIC				9680	9680	AMPS							
				81	81	MAX AMPS							
				81		MAX 125%							
				102									

PANEL SCHEDULE

NO SCALE | 2

NOT USED

NO SCALE | 3

CONSTRUCTION DOCUMENTS



SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
ELECTRICAL ONE-LINE, FAULT
CALCS & PANEL SCHEDULE

SHEET NUMBER
E-3

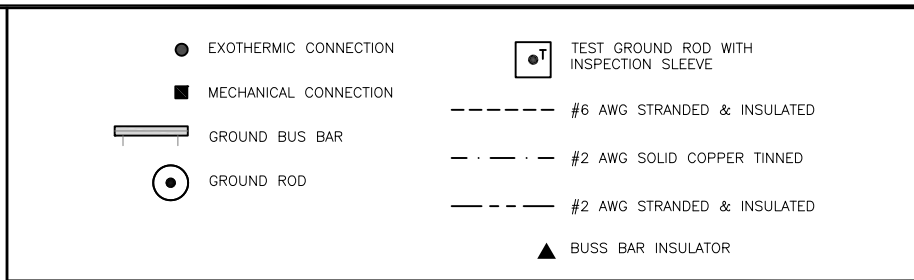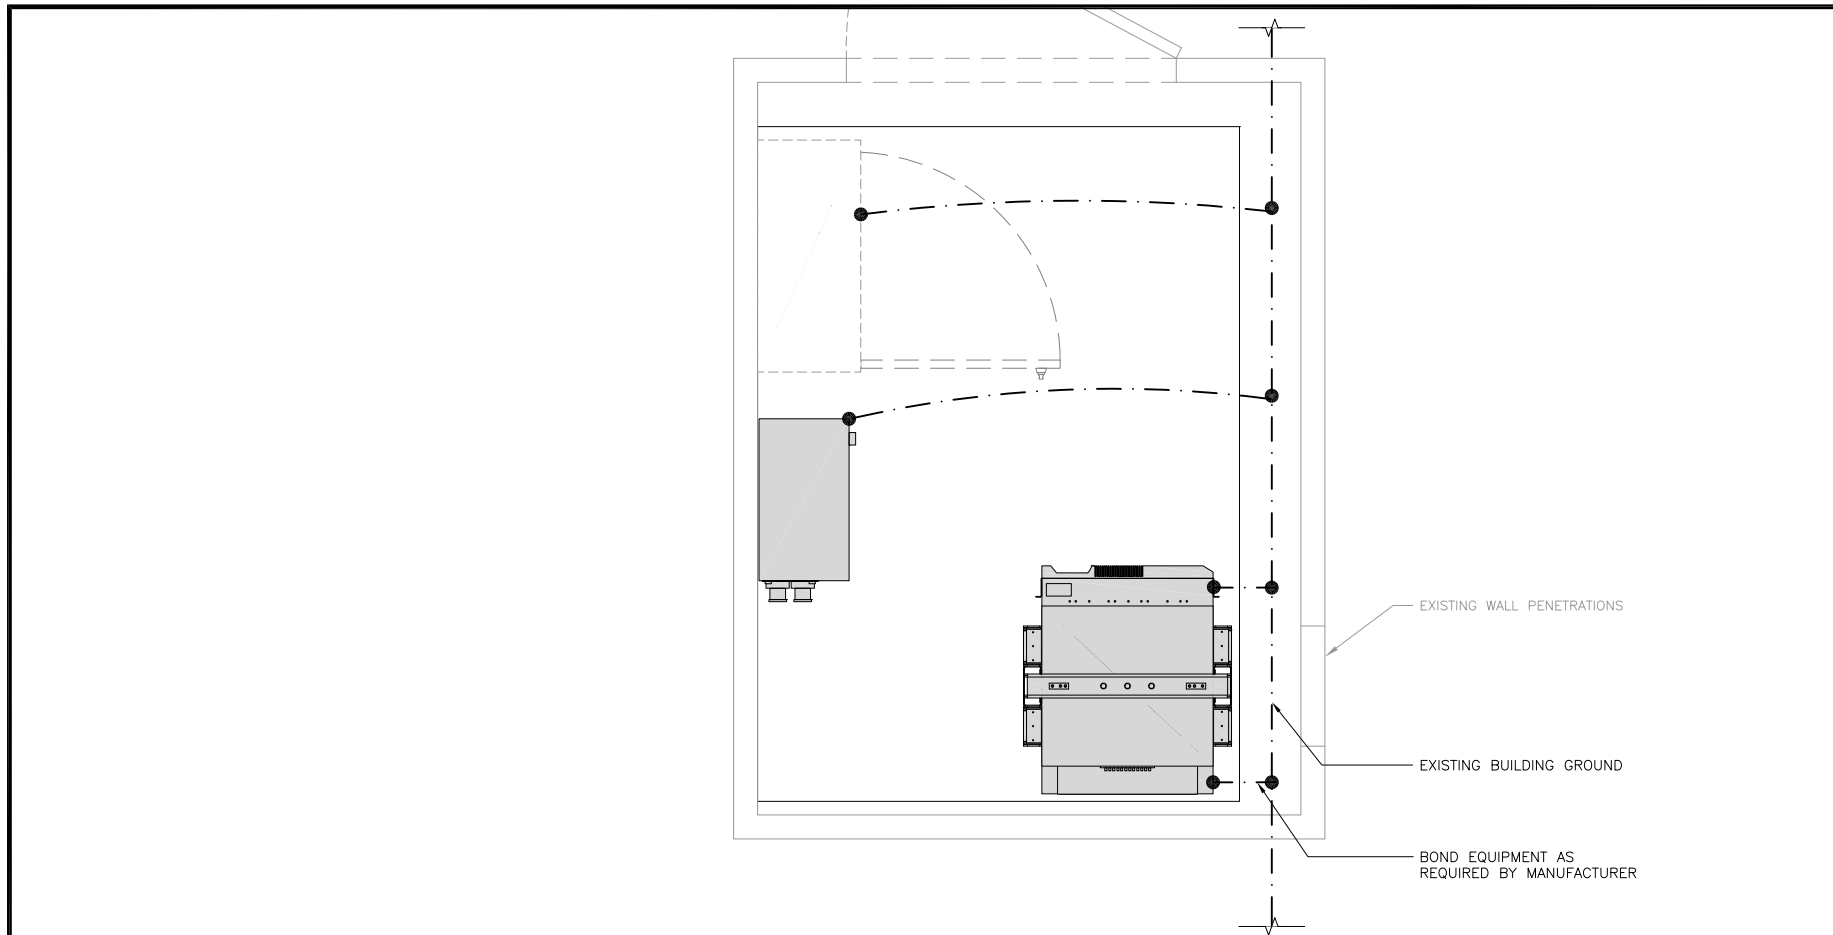

GROUNDING LEGEND

1. GROUNDING IS SHOWN DIAGRAMMATICALLY ONLY.
2. CONTRACTOR SHALL GROUND ALL EQUIPMENT AS A COMPLETE SYSTEM. GROUNDING SHALL BE IN COMPLIANCE WITH NEC SECTION 250 AND DISH Wireless L.L.C. GROUNDING AND BONDING REQUIREMENTS AND MANUFACTURER'S SPECIFICATIONS.
3. ALL GROUND CONDUCTORS SHALL BE COPPER; NO ALUMINUM CONDUCTORS SHALL BE USED.


GROUNDING KEY NOTES

- (A) **EXTERIOR GROUND RING:** #2 AWG SOLID COPPER, BURIED AT A DEPTH OF AT LEAST 30 INCHES BELOW GRADE, OR 6 INCHES BELOW THE FROST LINE AND APPROXIMATELY 24 INCHES FROM THE EXTERIOR WALL OR FOOTING.
 - (B) **TOWER GROUND RING:** THE GROUND RING SYSTEM SHALL BE INSTALLED AROUND AN ANTENNA TOWER'S LEGS, AND/OR GUY ANCHORS. WHERE SEPARATE SYSTEMS HAVE BEEN PROVIDED FOR THE TOWER AND THE BUILDING, AT LEAST TWO BONDS SHALL BE MADE BETWEEN THE TOWER RING GROUND SYSTEM AND THE BUILDING RING GROUND SYSTEM USING MINIMUM #2 AWG SOLID COPPER CONDUCTORS.
 - (C) **INTERIOR GROUND RING:** #2 AWG STRANDED GREEN INSULATED COPPER CONDUCTOR EXTENDED AROUND THE PERIMETER OF THE EQUIPMENT AREA. ALL NON-TELECOMMUNICATIONS RELATED METALLIC OBJECTS FOUND WITHIN A SITE SHALL BE GROUNDED TO THE INTERIOR GROUND RING WITH #6 AWG STRANDED GREEN INSULATED CONDUCTOR.
 - (D) **BOND TO INTERIOR GROUND RING:** #2 AWG SOLID TINNED COPPER WIRE PRIMARY BONDS SHALL BE PROVIDED AT LEAST AT FOUR POINTS ON THE INTERIOR GROUND RING, LOCATED AT THE CORNERS OF THE BUILDING.
 - (E) **GROUND ROD:** UL LISTED COPPER CLAD STEEL. MINIMUM 1/2" DIAMETER BY EIGHT FEET LONG. GROUND RODS SHALL BE INSTALLED WITH INSPECTION SLEEVES. GROUND RODS SHALL BE DRIVEN TO THE DEPTH OF GROUND RING CONDUCTOR.
 - (F) **CELL REFERENCE GROUND BAR:** POINT OF GROUND REFERENCE FOR ALL COMMUNICATIONS EQUIPMENT FRAMES. ALL BONDS ARE MADE WITH #2 AWG UNLESS NOTED OTHERWISE STRANDED GREEN INSULATED COPPER CONDUCTORS. BOND TO GROUND RING WITH (2) #2 SOLID TINNED COPPER CONDUCTORS.
 - (G) **HATCH PLATE GROUND BAR:** BOND TO THE INTERIOR GROUND RING WITH TWO #2 AWG STRANDED GREEN INSULATED COPPER CONDUCTORS. WHEN A HATCH-PLATE AND A CELL REFERENCE GROUND BAR ARE BOTH PRESENT, THE CRGB MUST BE CONNECTED TO THE HATCH-PLATE AND TO THE INTERIOR GROUND RING USING (2) TWO #2 AWG STRANDED GREEN INSULATED COPPER CONDUCTORS EACH.
 - (H) **EXTERIOR CABLE ENTRY PORT GROUND BARS:** LOCATED AT THE ENTRANCE TO THE CELL SITE BUILDING. BOND TO GROUND RING WITH A #2 AWG SOLID TINNED COPPER CONDUCTORS WITH AN EXOTHERMIC WELD AND INSPECTION SLEEVE.
 - (I) **TELCO GROUND BAR:** BOND TO BOTH CELL REFERENCE GROUND BAR OR EXTERIOR GROUND RING.
 - (J) **FRAME BONDING:** THE BONDING POINT FOR TELECOM EQUIPMENT FRAMES SHALL BE THE GROUND BUS THAT IS NOT ISOLATED FROM THE EQUIPMENTS METAL FRAMEWORK.
 - (K) **INTERIOR UNIT BONDS:** METAL FRAMES, CABINETS AND INDIVIDUAL METALLIC UNITS LOCATED WITH THE AREA OF THE INTERIOR GROUND RING REQUIRE A #6 AWG STRANDED GREEN INSULATED COPPER BOND TO THE INTERIOR GROUND RING.
 - (L) **FENCE AND GATE GROUNDING:** METAL FENCES WITHIN 7 FEET OF THE EXTERIOR GROUND RING OR OBJECTS BONDED TO THE EXTERIOR GROUND RING SHALL BE BONDED TO THE GROUND RING WITH A #2 AWG SOLID TINNED COPPER CONDUCTOR AT AN INTERVAL NOT EXCEEDING 25 FEET. BONDS SHALL BE MADE AT EACH GATE POST AND ACROSS GATE OPENINGS.
 - (M) **EXTERIOR UNIT BONDS:** METALLIC OBJECTS, EXTERNAL TO OR MOUNTED TO THE BUILDING, SHALL BE BONDED TO THE EXTERIOR GROUND RING. USING #2 TINNED SOLID COPPER WIRE
 - (N) **ICE BRIDGE SUPPORTS:** EACH ICE BRIDGE LEG SHALL BE BONDED TO THE GROUND RING WITH #2 AWG BARE TINNED COPPER CONDUCTOR. PROVIDE EXOTHERMIC WELDS AT BOTH THE ICE BRIDGE LEG AND BURIED GROUND RING.
 - (O) DURING ALL DC POWER SYSTEM CHANGES INCLUDING DC SYSTEM CHANGE OUTS, RECTIFIER REPLACEMENTS OR ADDITIONS, BREAKER DISTRIBUTION CHANGES, BATTERY ADDITIONS, BATTERY REPLACEMENTS AND INSTALLATIONS OR CHANGES TO DC CONVERTER SYSTEMS IT SHALL BE REQUIRED THAT SERVICE CONTRACTORS VERIFY ALL DC POWER SYSTEMS ARE EQUIPPED WITH A MASTER DC SYSTEM RETURN GROUND CONDUCTOR FROM THE DC POWER SYSTEM COMMON RETURN BUS DIRECTLY CONNECTED TO THE CELL SITE REFERENCE GROUND BAR
 - (P) TOWER TOP COLLECTOR BUSS BAR IS TO BE MECHANICALLY BONDED TO TOWER STEEL.
- REFER TO DISH Wireless L.L.C. GROUNDING NOTES.

NO SCALE 1

NOTES

ANTENNAS AND OVP SHOWN ARE GENERIC AND NOT REFERENCING TO A SPECIFIC MANUFACTURER. THIS LAYOUT IS FOR REFERENCE PURPOSES ONLY

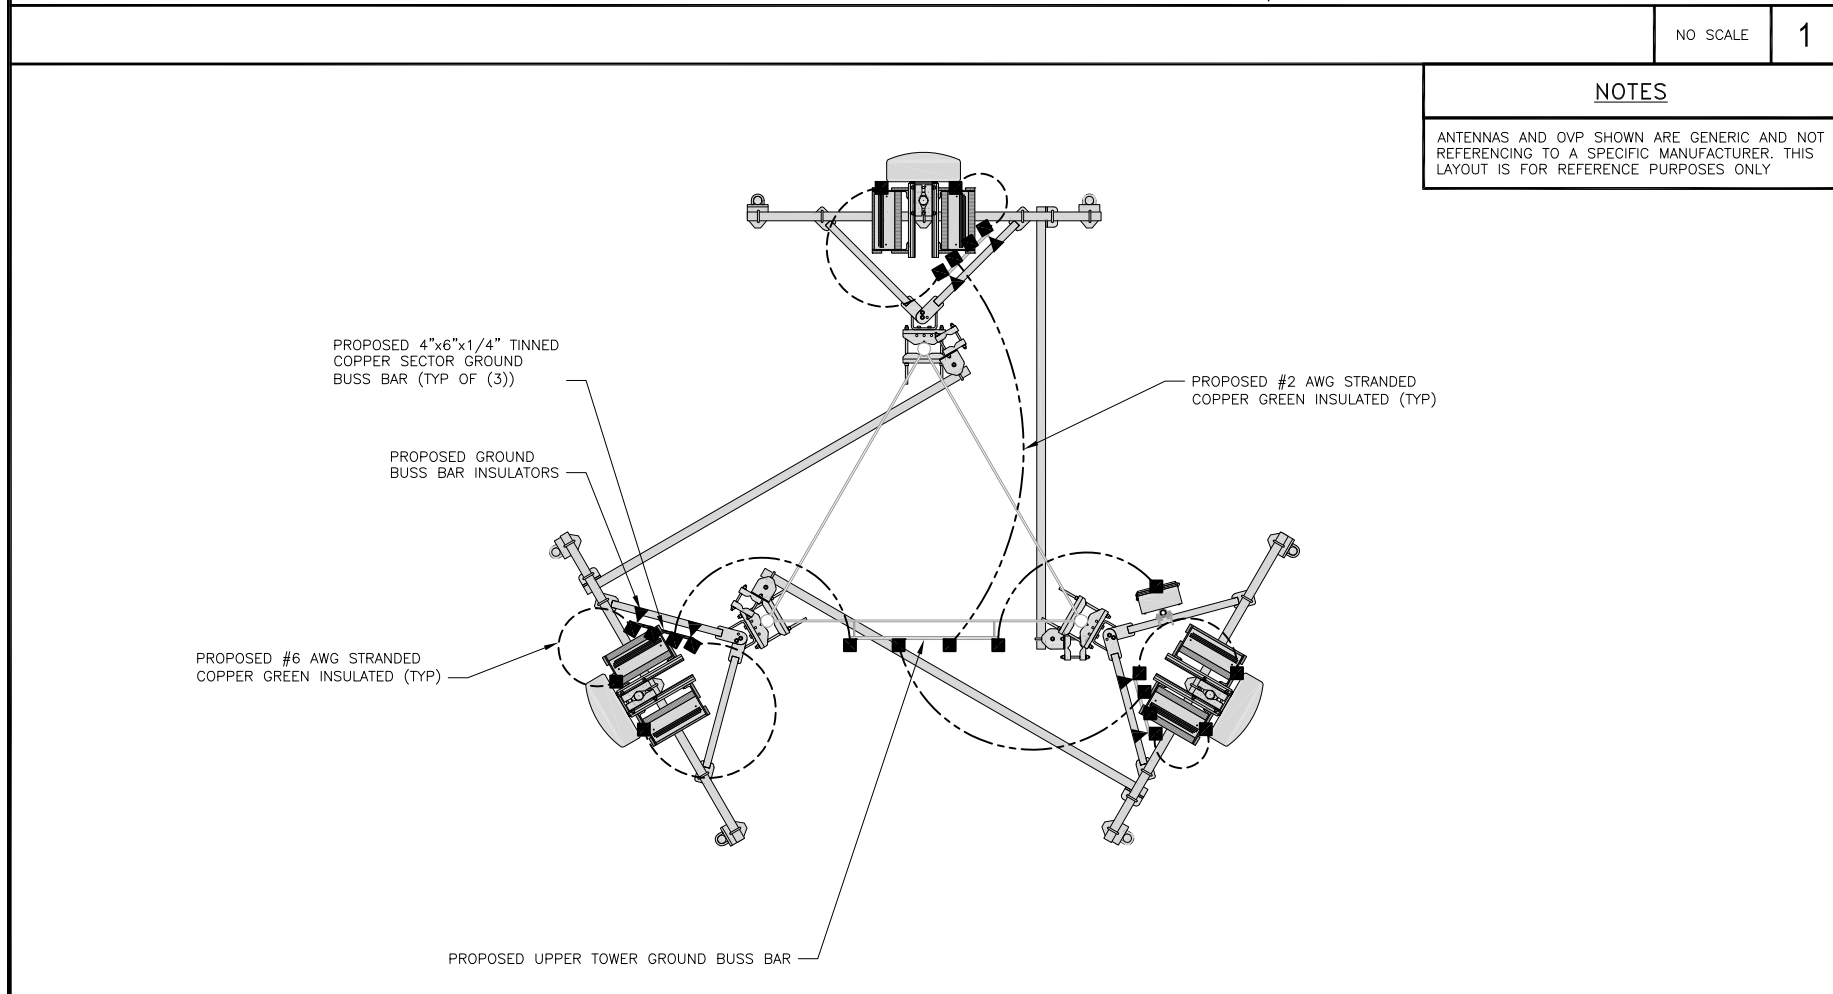

TYPICAL ANTENNA GROUNDING PLAN

NO SCALE 2

GROUNDING KEY NOTES

NO SCALE 3




5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com

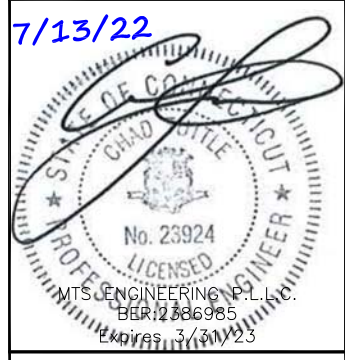

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY:	CHECKED BY:	APPROVED BY:
RK	BEH	BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION


A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
GROUNDING PLANS AND NOTES


SHEET NUMBER
G-1

NOTES
EQUIPMENT CABINET OMITTED FOR CLARITY

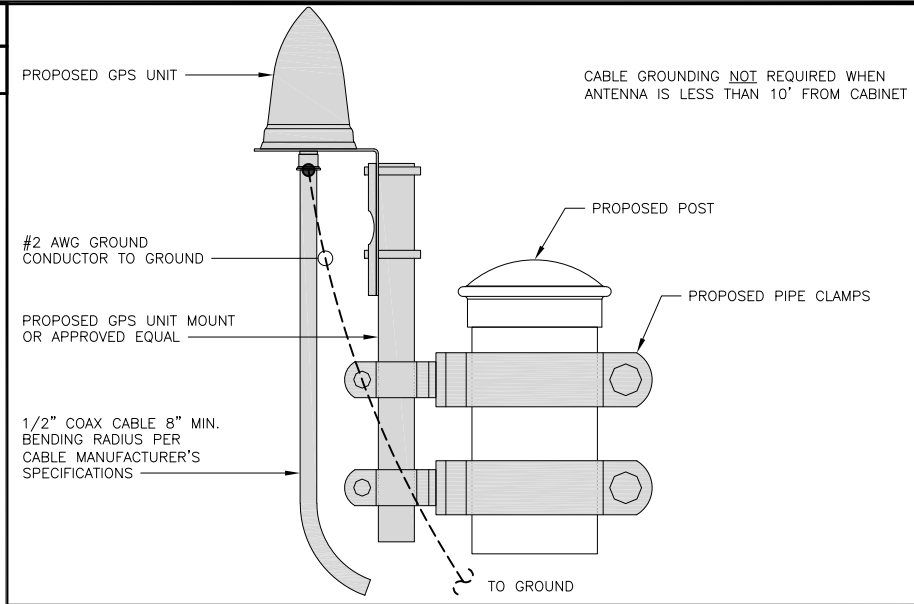


TYPICAL GPS UNIT GROUNDING NO SCALE 2

NOT USED NO SCALE 1

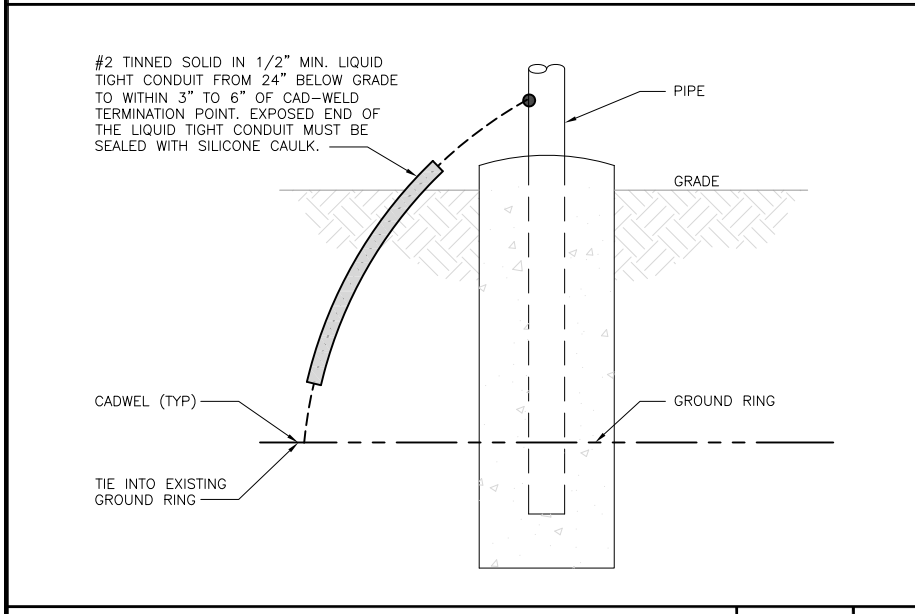


TRANSITIONING GROUND DETAIL NO SCALE 4

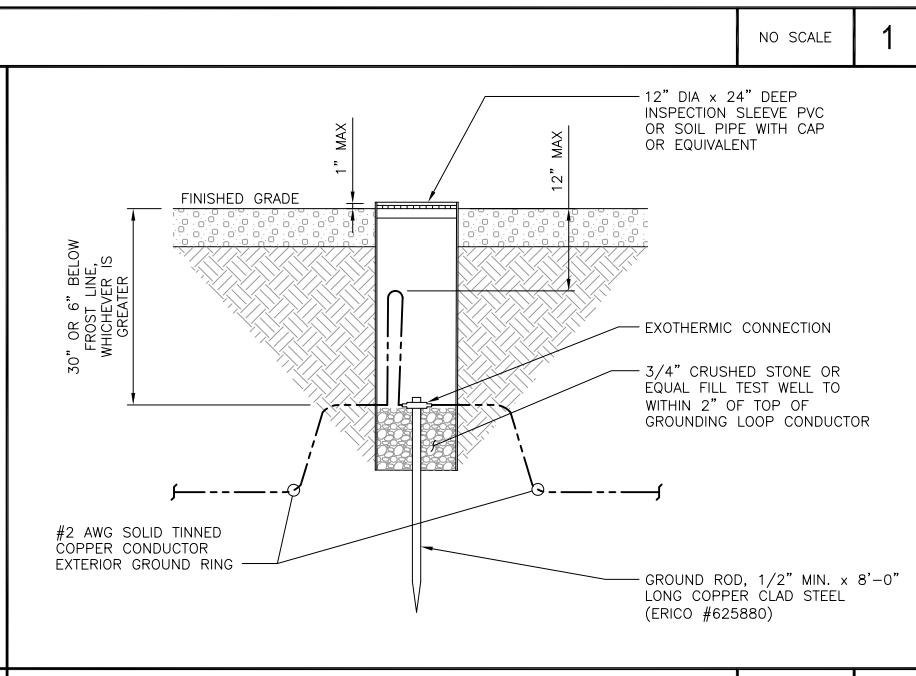

TYPICAL TEST GROUND ROD WITH INSPECTION SLEEVE NO SCALE 5

NOT USED NO SCALE 3

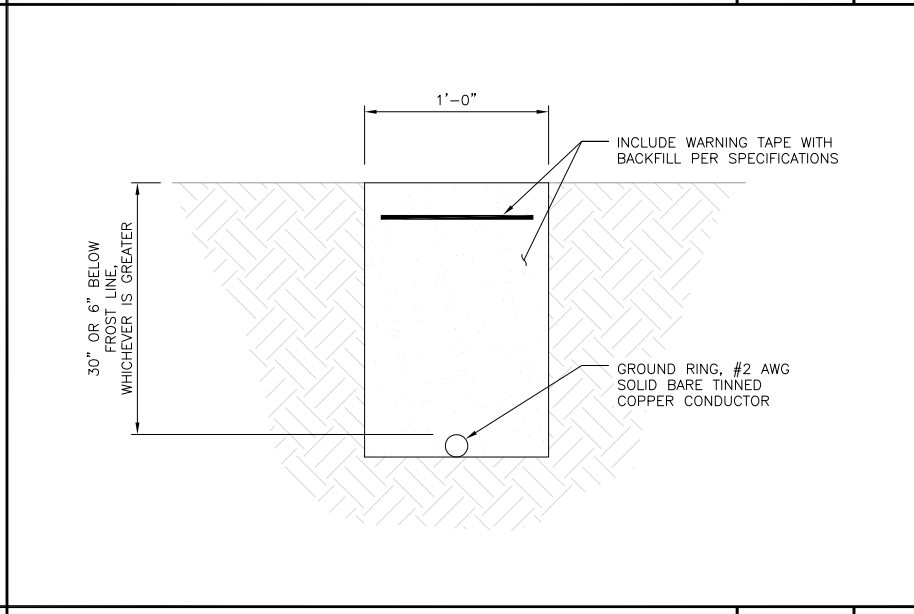

TYPICAL GROUND RING TRENCH NO SCALE 6



5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



7/13/22

CHAD LITTLE
No. 23924
LICENSED PROFESSIONAL ENGINEER
MTS ENGINEERING P.L.L.C.
BER: 286985
Expires: 7/13/25

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY: CHECKED BY: APPROVED BY:
RK BEH BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION



A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
GROUNDING DETAILS

SHEET NUMBER
G-2

1. EXOTHERMIC WELD (2) TWO, #2 AWG BARE TINNED SOLID COPPER CONDUCTORS TO GROUND BAR. ROUTE CONDUCTORS TO BURIED GROUND RING AND PROVIDE PARALLEL EXOTHERMIC WELD.
2. ALL EXTERIOR GROUNDING HARDWARE SHALL BE STAINLESS STEEL 3/8" DIAMETER OR LARGER. ALL HARDWARE 18-8 STAINLESS STEEL INCLUDING LOCK WASHERS, COAT ALL SURFACES WITH AN ANTI-OXIDANT COMPOUND BEFORE MATING.
3. FOR GROUND BOND TO STEEL ONLY: COAT ALL SURFACES WITH AN ANTI-OXIDANT COMPOUND BEFORE MATING.
4. DO NOT INSTALL CABLE GROUNDING KIT AT A BEND AND ALWAYS DIRECT GROUND CONDUCTOR DOWN TO GROUNDING BUS.
5. NUT & WASHER SHALL BE PLACED ON THE FRONT SIDE OF THE GROUND BAR AND BOLTED ON THE BACK SIDE.
6. ALL GROUNDING PARTS AND EQUIPMENT TO BE SUPPLIED AND INSTALLED BY CONTRACTOR.
7. THE CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLING ADDITIONAL GROUND BAR AS REQUIRED.
8. ENSURE THE WIRE INSULATION TERMINATION IS WITHIN 1/8" OF THE BARREL (NO SHINERS).

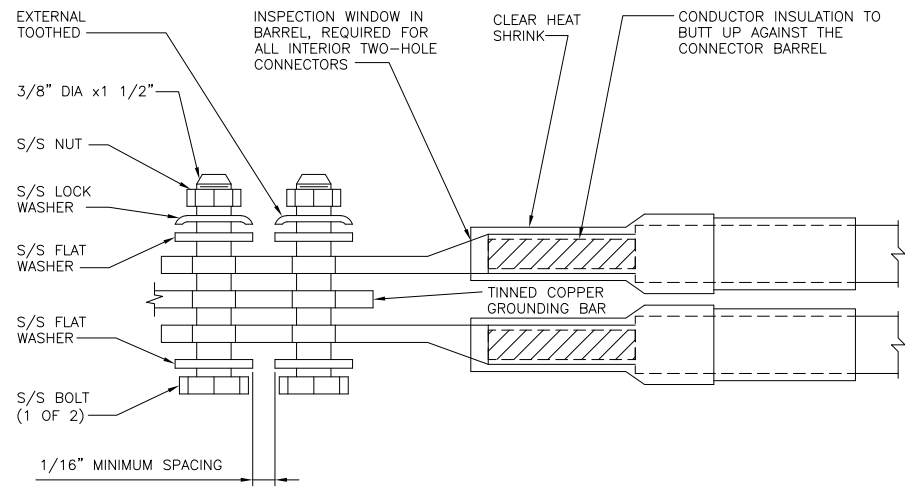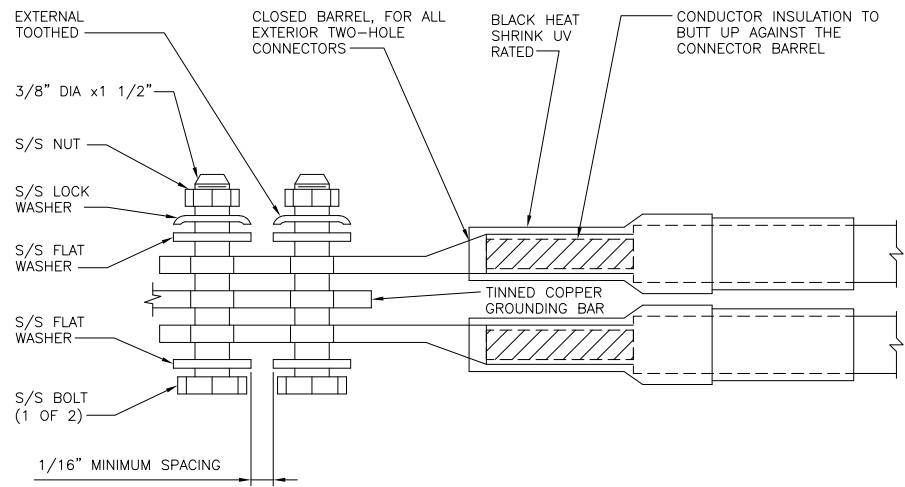

5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com

TYPICAL GROUNDING NOTES


NO SCALE 1

TYPICAL EXTERIOR TWO HOLE LUG

NO SCALE 2

TYPICAL INTERIOR TWO HOLE LUG

NO SCALE 3

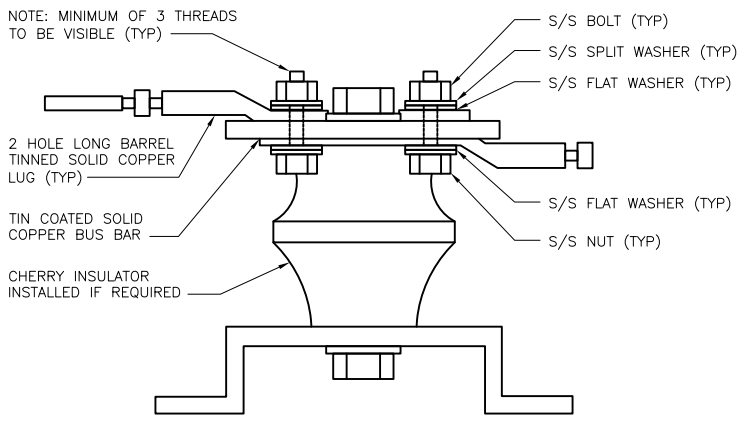

LUG DETAIL


NO SCALE 4

NOT USED

NO SCALE 5

NOT USED

NO SCALE 6



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY: RK
CHECKED BY: BEH
APPROVED BY: BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
GROUNDING DETAILS

SHEET NUMBER
G-3

NOT USED



NO SCALE 7

NOT USED

NO SCALE 8

NOT USED

NO SCALE 9

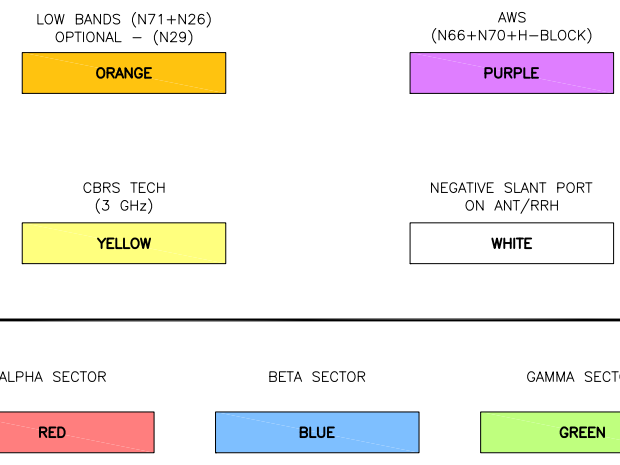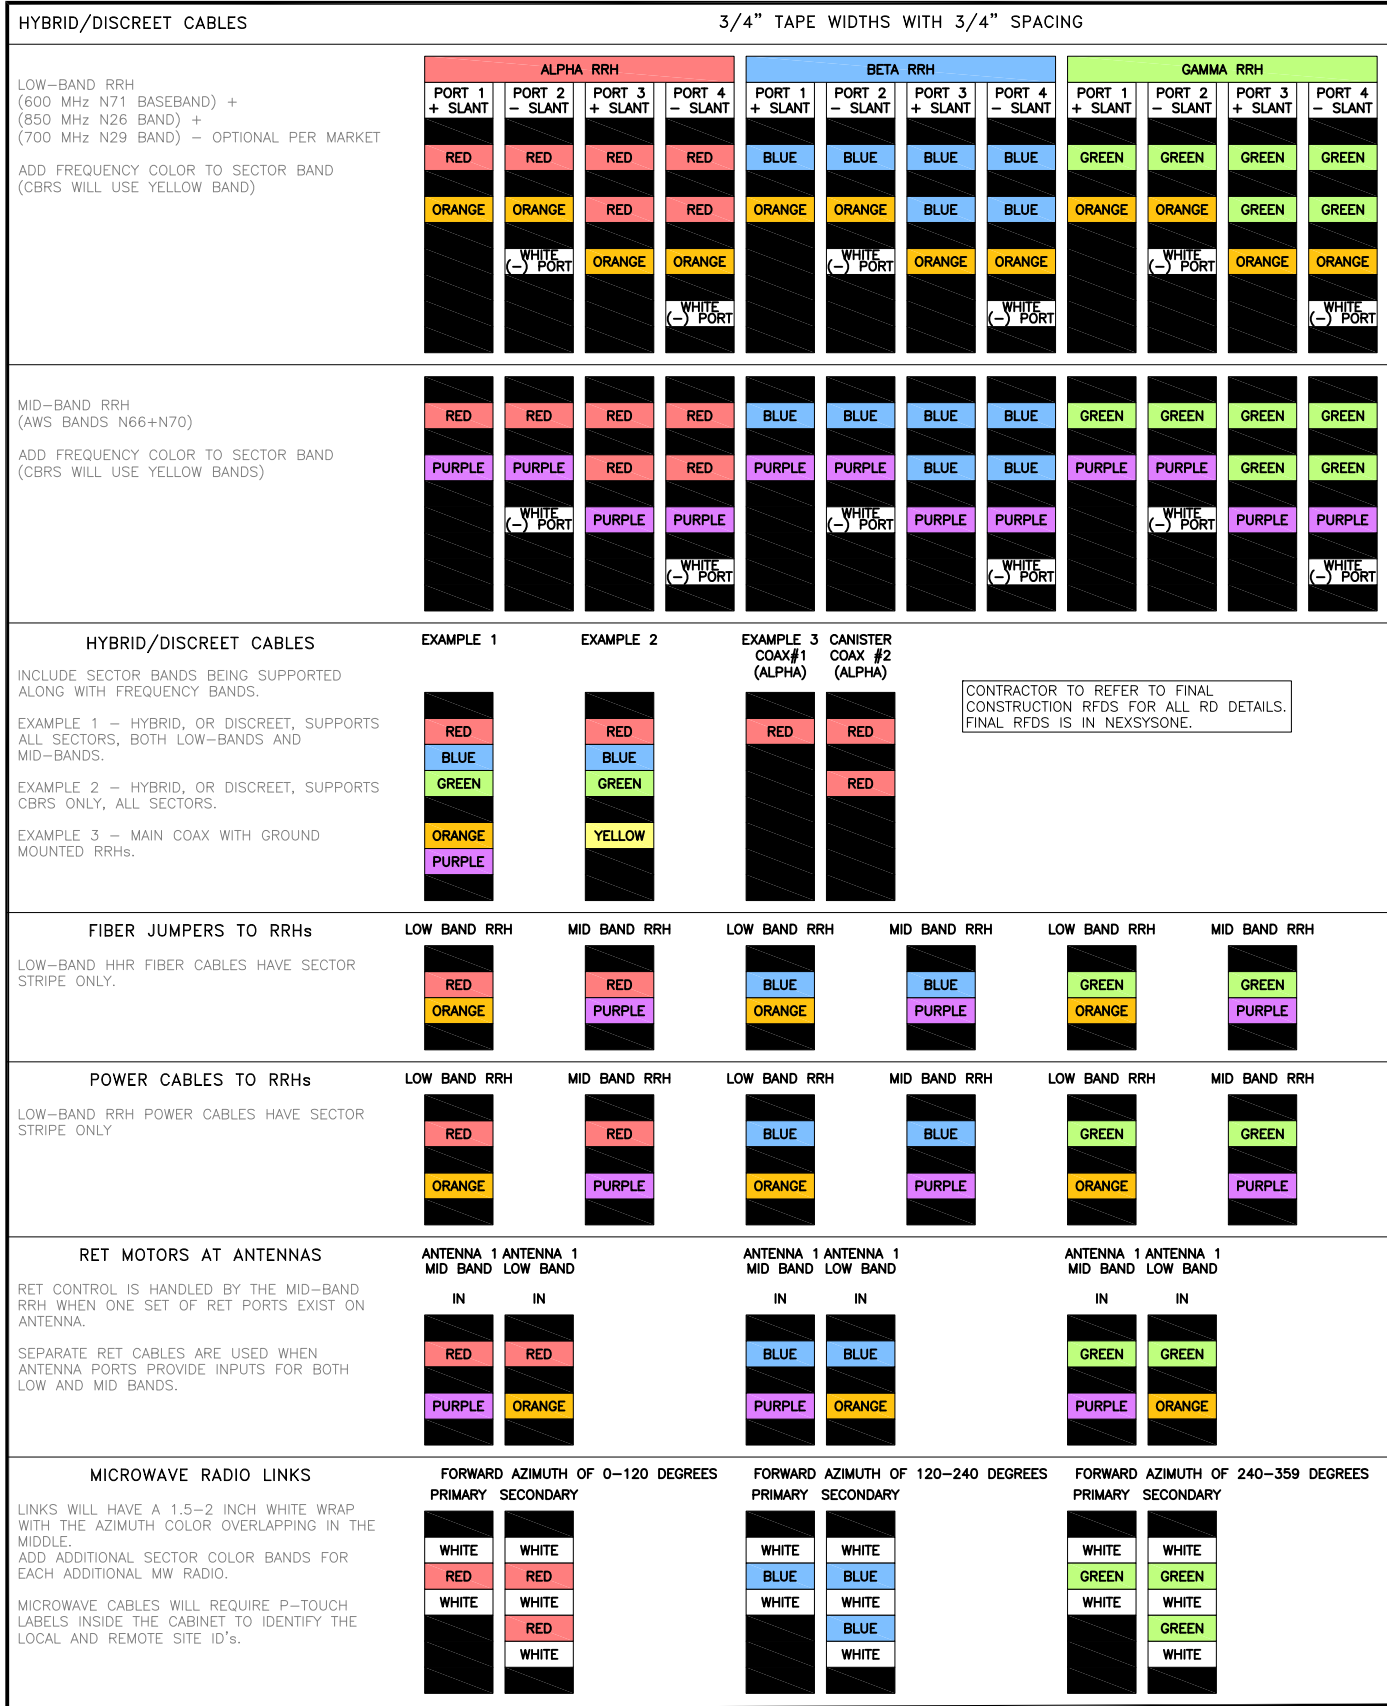

COLOR IDENTIFIER NO SCALE 2

NOT USED NO SCALE 3

NOT USED NO SCALE 4

RF CABLE COLOR CODES

NO SCALE

1

NOT USED

NO SCALE

4



5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



7/13/22

CHAD LITTLE
No. 23924
LICENSED PROFESSIONAL ENGINEER
Expires 3/31/25

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY: CHECKED BY: APPROVED BY:
RK BEH BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION




A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
RF
CABLE COLOR CODE

SHEET NUMBER
RF-1

EXOTHERMIC CONNECTION
 MECHANICAL CONNECTION
 BUSS BAR INSULATOR
 CHEMICAL ELECTROLYTIC GROUNDING SYSTEM
 TEST CHEMICAL ELECTROLYTIC GROUNDING SYSTEM
 EXOTHERMIC WITH INSPECTION SLEEVE
 GROUNDING BAR
 GROUND ROD
 TEST GROUND ROD WITH INSPECTION SLEEVE
 SINGLE POLE SWITCH
 DUPLEX RECEPTACLE
 DUPLEX GFCI RECEPTACLE
 FLUORESCENT LIGHTING FIXTURE (2) TWO LAMPS 48-T8
 SMOKE DETECTION (DC)
 EMERGENCY LIGHTING (DC)
 SECURITY LIGHT W/PHOTOCELL LITHONIA ALXW
 LED-1-25A400/51K-SR4-120-PE-DOBTXD
 CHAIN LINK FENCE
 WOOD/WROUGHT IRON FENCE
 WALL STRUCTURE
 LEASE AREA
 PROPERTY LINE (PL)
 SETBACKS
 ICE BRIDGE
 CABLE TRAY
 WATER LINE
 UNDERGROUND POWER
 UNDERGROUND TELCO
 OVERHEAD POWER
 OVERHEAD TELCO
 UNDERGROUND TELCO/POWER
 ABOVE GROUND POWER
 ABOVE GROUND TELCO
 ABOVE GROUND TELCO/POWER
 WORKPOINT

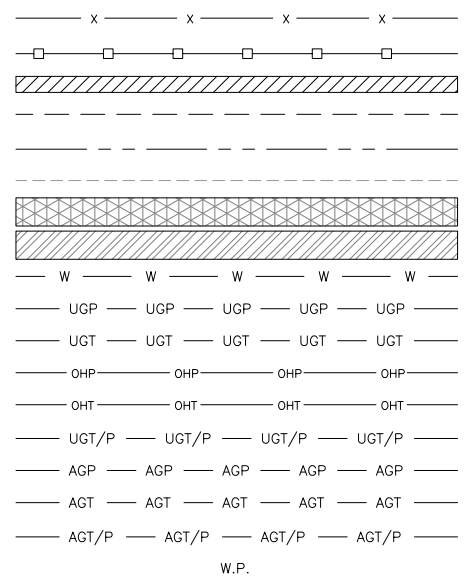

LEGEND

AB	ANCHOR BOLT	IN	INCH
ABV	ABOVE	INT	INTERIOR
AC	ALTERNATING CURRENT	LB(S)	POUND(S)
ADDL	ADDITIONAL	LF	LINEAR FEET
AFF	ABOVE FINISHED FLOOR	LTE	LONG TERM EVOLUTION
AFG	ABOVE FINISHED GRADE	MAS	MASONRY
AGL	ABOVE GROUND LEVEL	MAX	MAXIMUM
AIC	AMPERAGE INTERRUPTION CAPACITY	MB	MACHINE BOLT
ALUM	ALUMINUM	MECH	MECHANICAL
ALT	ALTERNATE	MFR	MANUFACTURER
ANT	ANTENNA	MGB	MASTER GROUND BAR
APPROX	APPROXIMATE	MIN	MINIMUM
ARCH	ARCHITECTURAL	MISC	MISCELLANEOUS
ATS	AUTOMATIC TRANSFER SWITCH	MTL	METAL
AWG	AMERICAN WIRE GAUGE	MTS	MANUAL TRANSFER SWITCH
BATT	BATTERY	MW	MICROWAVE
BLDG	BUILDING	NEC	NATIONAL ELECTRIC CODE
BLK	BLOCK	NM	NEWTON METERS
BLKG	BLOCKING	NO.	NUMBER
BM	BEAM	#	NUMBER
BTC	BARE TINNED COPPER CONDUCTOR	NTS	NOT TO SCALE
BOF	BOTTOM OF FOOTING	OC	ON-CENTER
CAB	CABINET	OSHA	OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION
CANT	CANTILEVERED	OPNG	OPENING
CHG	CHARGING	P/C	PRECAST CONCRETE
CLG	CEILING	PCS	PERSONAL COMMUNICATION SERVICES
CLR	CLEAR	PCU	PRIMARY CONTROL UNIT
COL	COLUMN	PRC	PRIMARY RADIO CABINET
COMM	COMMON	PP	POLARIZING PRESERVING
CONC	CONCRETE	PSF	POUNDS PER SQUARE FOOT
CONSTR	CONSTRUCTION	PSI	POUNDS PER SQUARE INCH
DBL	DOUBLE	PT	PRESSURE TREATED
DC	DIRECT CURRENT	PWR	POWER CABINET
DEPT	DEPARTMENT	QTY	QUANTITY
DF	DOUGLAS FIR	RAD	RADIUS
DIA	DIAMETER	RECT	RECTIFIER
DIAG	DIAGONAL	REF	REFERENCE
DIM	DIMENSION	REINF	REINFORCEMENT
DWG	DRAWING	REQ'D	REQUIRED
DWL	DOWEL	RET	REMOTE ELECTRIC TILT
EA	EACH	RF	RADIO FREQUENCY
EC	ELECTRICAL CONDUCTOR	RMC	RIGID METALLIC CONDUIT
EL	ELEVATION	RRH	REMOTE RADIO HEAD
ELEC	ELECTRICAL	RRU	REMOTE RADIO UNIT
EMT	ELECTRICAL METALLIC TUBING	RWY	RACEWAY
ENG	ENGINEER	SCH	SCHEDULE
EQ	EQUAL	SHT	SHEET
EXP	EXPANSION	SIAD	SMART INTEGRATED ACCESS DEVICE
EXT	EXTERIOR	SIM	SIMILAR
EW	EACH WAY	SPEC	SPECIFICATION
FAB	FABRICATION	SQ	SQUARE
FF	FINISH FLOOR	SS	STAINLESS STEEL
FG	FINISH GRADE	STD	STANDARD
FIF	FACILITY INTERFACE FRAME	STL	STEEL
FIN	FINISH(ED)	TEMP	TEMPORARY
FLR	FLOOR	THK	THICKNESS
FDN	FOUNDATION	TMA	TOWER MOUNTED AMPLIFIER
FOC	FACE OF CONCRETE	TN	TOE NAIL
FOM	FACE OF MASONRY	TOA	TOP OF ANTENNA
FOS	FACE OF STUD	TOC	TOP OF CURB
FOW	FACE OF WALL	TOF	TOP OF FOUNDATION
FS	FINISH SURFACE	TOP	TOP OF PLATE (PARAPET)
FT	FOOT	TOS	TOP OF STEEL
FTG	FOOTING	TOW	TOP OF WALL
GA	GAUGE	TVSS	TRANSIENT VOLTAGE SURGE SUPPRESSION
GEN	GENERATOR	TYP	TYPICAL
GFCI	GROUND FAULT CIRCUIT INTERRUPTER	UG	UNDERGROUND
GLB	GLUE LAMINATED BEAM	UL	UNDERWRITERS LABORATORY
GLV	GALVANIZED	UNO	UNLESS NOTED OTHERWISE
GPS	GLOBAL POSITIONING SYSTEM	UMTS	UNIVERSAL MOBILE TELECOMMUNICATIONS SYSTEM
GND	GROUND	UPS	UNINTERRUPTIBLE POWER SYSTEM (DC POWER PLANT)
GSM	GLOBAL SYSTEM FOR MOBILE	VIF	VERIFIED IN FIELD
HDG	HOT DIPPED GALVANIZED	W	WIDE
HDR	HEADER	W/	WITH
HGR	HANGER	WD	WOOD
HVAC	HEAT/VENTILATION/AIR CONDITIONING	WP	WEATHERPROOF
HT	HEIGHT	WT	WEIGHT
IGR	INTERIOR GROUND RING		

ABBREVIATIONS



5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



7/13/22

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY:	CHECKED BY:	APPROVED BY:
RK	BEH	BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
LEGEND AND ABBREVIATIONS

SHEET NUMBER
GN-1

SIGN TYPES		
TYPE	COLOR	COLOR CODE PURPOSE
INFORMATION	GREEN	"INFORMATIONAL SIGN" TO NOTIFY OTHERS OF SITE OWNERSHIP & CONTACT NUMBER AND POTENTIAL RF EXPOSURE.
NOTICE	BLUE	"NOTICE BEYOND THIS POINT" RF FIELDS BEYOND THIS POINT MAY EXCEED THE FCC GENERAL PUBLIC EXPOSURE LIMIT. OBEY ALL POSTED SIGNS AND SITE GUIDELINES FOR WORKING IN RF ENVIRONMENTS. IN ACCORDANCE WITH FEDERAL COMMUNICATIONS COMMISSION RULES ON RADIO FREQUENCY EMISSIONS 47 CFR-1.1307(b)
CAUTION	YELLOW	"CAUTION BEYOND THIS POINT" RF FIELDS BEYOND THIS POINT MAY EXCEED THE FCC GENERAL PUBLIC EXPOSURE LIMIT. OBEY ALL POSTED SIGNS AND SITE GUIDELINES FOR WORKING IN RF ENVIRONMENTS. IN ACCORDANCE WITH FEDERAL COMMUNICATIONS COMMISSION RULES ON RADIO FREQUENCY EMISSIONS 47 CFR-1.1307(b)
WARNING	ORANGE/RED	"WARNING BEYOND THIS POINT" RF FIELDS AT THIS SITE EXCEED FCC RULES FOR HUMAN EXPOSURE. FAILURE TO OBEY ALL POSTED SIGNS AND SITE GUIDELINES FOR WORKING IN RF ENVIRONMENTS COULD RESULT IN SERIOUS INJURY. IN ACCORDANCE WITH FEDERAL COMMUNICATIONS COMMISSION RULES ON RADIO FREQUENCY EMISSIONS 47 CFR-1.1307(b)

SIGN PLACEMENT:

- RF SIGNAGE PLACEMENT SHALL FOLLOW THE RECOMMENDATIONS OF AN EXISTING EME REPORT, CREATED BY A THIRD PARTY PREVIOUSLY AUTHORIZED BY DISH Wireless L.L.C.
- INFORMATION SIGN (GREEN) SHALL BE LOCATED ON EXISTING DISH Wireless L.L.C. EQUIPMENT.
 - A) IF THE INFORMATION SIGN IS A STICKER, IT SHALL BE PLACED ON EXISTING DISH Wireless L.L.C. EQUIPMENT CABINET.
 - B) IF THE INFORMATION SIGN IS A METAL SIGN IT SHALL BE PLACED ON EXISTING DISH Wireless L.L.C. H-FRAME WITH A SECURE ATTACH METHOD.
- IF EME REPORT IS NOT AVAILABLE AT THE TIME OF CREATION OF CONSTRUCTION DOCUMENTS; PLEASE CONTACT DISH Wireless L.L.C. CONSTRUCTION MANAGER FOR FURTHER INSTRUCTION ON HOW TO PROCEED.

NOTES:

1. FOR DISH Wireless L.L.C. LOGO, SEE DISH Wireless L.L.C. DESIGN SPECIFICATIONS (PROVIDED BY DISH Wireless L.L.C.)
2. SITE ID SHALL BE APPLIED TO SIGNS USING "LASER ENGRAVING" OR ANY OTHER WEATHER RESISTANT METHOD (DISH Wireless L.L.C. APPROVAL REQUIRED)
3. TEXT FOR SIGNAGE SHALL INDICATE CORRECT SITE NAME AND NUMBER AS PER DISH Wireless L.L.C. CONSTRUCTION MANAGER RECOMMENDATIONS.
4. CABINET/SHELTER MOUNTING APPLICATION REQUIRES ANOTHER PLATE APPLIED TO THE FACE OF THE CABINET WITH WATER PROOF POLYURETHANE ADHESIVE
5. ALL SIGNS WILL BE SECURED WITH EITHER STAINLESS STEEL ZIP TIES OR STAINLESS STEEL TECH SCREWS
6. ALL SIGNS TO BE 8.5"x11" AND MADE WITH 0.04" OF ALUMINUM MATERIAL

INFORMATION

This is an access point to an area with transmitting antennas.

Obey all signs and barriers beyond this point.
Call the DISH Wireless L.L.C. NOC at 1-866-624-6874

Site ID: _____



THIS SIGN IS FOR REFERENCE PURPOSES ONLY

NOTICE



Transmitting Antenna(s)

Radio frequency fields beyond this point **MAY EXCEED** the FCC Occupational exposure limit.

Obey all posted signs and site guidelines for working in radio frequency environments.

Call the DISH Wireless L.L.C. NOC at 1-866-624-6874 prior to working beyond this point.

Site ID: _____



THIS SIGN IS FOR REFERENCE PURPOSES ONLY

CAUTION



Transmitting Antenna(s)

Radio frequency fields beyond this point **MAY EXCEED** the FCC Occupational exposure limit.

Obey all posted signs and site guidelines for working in radio frequency environments.

Call the DISH Wireless L.L.C. NOC at 1-866-624-6874 prior to working beyond this point.

Site ID: _____



THIS SIGN IS FOR REFERENCE PURPOSES ONLY

WARNING



Transmitting Antenna(s)

Radio frequency fields beyond this point **EXCEED** the FCC Occupational exposure limit.

Obey all posted signs and site guidelines for working in radio frequency environments.

Call the DISH Wireless L.L.C. NOC at 1-866-624-6874 prior to working beyond this point.

Site ID: _____



THIS SIGN IS FOR REFERENCE PURPOSES ONLY



5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com

7/13/22



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY:	CHECKED BY:	APPROVED BY:
RK	BEH	BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
RF SIGNAGE

SHEET NUMBER
GN-2

RF SIGNAGE

SITE ACTIVITY REQUIREMENTS:

1. NOTICE TO PROCEED – NO WORK SHALL COMMENCE PRIOR TO CONTRACTOR RECEIVING A WRITTEN NOTICE TO PROCEED (NTP) AND THE ISSUANCE OF A PURCHASE ORDER. PRIOR TO ACCESSING/ENTERING THE SITE YOU MUST CONTACT THE DISH Wireless L.L.C. AND TOWER OWNER NOC & THE DISH Wireless L.L.C. AND TOWER OWNER CONSTRUCTION MANAGER.
2. "LOOK UP" – DISH Wireless L.L.C. AND TOWER OWNER SAFETY CLIMB REQUIREMENT:
THE INTEGRITY OF THE SAFETY CLIMB AND ALL COMPONENTS OF THE CLIMBING FACILITY SHALL BE CONSIDERED DURING ALL STAGES OF DESIGN, INSTALLATION, AND INSPECTION. TOWER MODIFICATION, MOUNT REINFORCEMENTS, AND/OR EQUIPMENT INSTALLATIONS SHALL NOT COMPROMISE THE INTEGRITY OR FUNCTIONAL USE OF THE SAFETY CLIMB OR ANY COMPONENTS OF THE CLIMBING FACILITY ON THE STRUCTURE. THIS SHALL INCLUDE, BUT NOT BE LIMITED TO: PINCHING OF THE WIRE ROPE, BENDING OF THE WIRE ROPE FROM ITS SUPPORTS, DIRECT CONTACT OR CLOSE PROXIMITY TO THE WIRE ROPE WHICH MAY CAUSE FRICTIONAL WEAR, IMPACT TO THE ANCHORAGE POINTS IN ANY WAY, OR TO IMPEDE/BLOCK ITS INTENDED USE. ANY COMPROMISED SAFETY CLIMB, INCLUDING EXISTING CONDITIONS MUST BE TAGGED OUT AND REPORTED TO YOUR DISH Wireless L.L.C. AND DISH Wireless L.L.C. AND TOWER OWNER POC OR CALL THE NOC TO GENERATE A SAFETY CLIMB MAINTENANCE AND CONTRACTOR NOTICE TICKET.
3. PRIOR TO THE START OF CONSTRUCTION, ALL REQUIRED JURISDICTIONAL PERMITS SHALL BE OBTAINED. THIS INCLUDES, BUT IS NOT LIMITED TO, BUILDING, ELECTRICAL, MECHANICAL, FIRE, FLOOD ZONE, ENVIRONMENTAL, AND ZONING. AFTER ONSITE ACTIVITIES AND CONSTRUCTION ARE COMPLETED, ALL REQUIRED PERMITS SHALL BE SATISFIED AND CLOSED OUT ACCORDING TO LOCAL JURISDICTIONAL REQUIREMENTS.
4. ALL CONSTRUCTION MEANS AND METHODS; INCLUDING BUT NOT LIMITED TO, ERECTION PLANS, RIGGING PLANS, CLIMBING PLANS, AND RESCUE PLANS SHALL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR RESPONSIBLE FOR THE EXECUTION OF THE WORK CONTAINED HEREIN, AND SHALL MEET ANSI/ASSE A10.48 (LATEST EDITION); FEDERAL, STATE, AND LOCAL REGULATIONS; AND ANY APPLICABLE INDUSTRY CONSENSUS STANDARDS RELATED TO THE CONSTRUCTION ACTIVITIES BEING PERFORMED. ALL RIGGING PLANS SHALL ADHERE TO ANSI/ASSE A10.48 (LATEST EDITION) AND DISH Wireless L.L.C. AND TOWER OWNER STANDARDS, INCLUDING THE REQUIRED INVOLVEMENT OF A QUALIFIED ENGINEER FOR CLASS IV CONSTRUCTION, TO CERTIFY THE SUPPORTING STRUCTURE(S) IN ACCORDANCE WITH ANSI/TIA-322 (LATEST EDITION).
5. ALL SITE WORK TO COMPLY WITH DISH Wireless L.L.C. AND TOWER OWNER INSTALLATION STANDARDS FOR CONSTRUCTION ACTIVITIES ON DISH Wireless L.L.C. AND TOWER OWNER TOWER SITE AND LATEST VERSION OF ANSI/TIA-1019-A-2012 "STANDARD FOR INSTALLATION, ALTERATION, AND MAINTENANCE OF ANTENNA SUPPORTING STRUCTURES AND ANTENNAS."
6. IF THE SPECIFIED EQUIPMENT CAN NOT BE INSTALLED AS SHOWN ON THESE DRAWINGS, THE CONTRACTOR SHALL PROPOSE AN ALTERNATIVE INSTALLATION FOR APPROVAL BY DISH Wireless L.L.C. AND TOWER OWNER PRIOR TO PROCEEDING WITH ANY SUCH CHANGE OF INSTALLATION.
7. ALL MATERIALS FURNISHED AND INSTALLED SHALL BE IN STRICT ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS AND ORDINANCES. CONTRACTOR SHALL ISSUE ALL APPROPRIATE NOTICES AND COMPLY WITH ALL LAWS, ORDINANCES, RULES, REGULATIONS AND LAWFUL ORDERS OF ANY PUBLIC AUTHORITY REGARDING THE PERFORMANCE OF THE WORK. ALL WORK CARRIED OUT SHALL COMPLY WITH ALL APPLICABLE MUNICIPAL AND UTILITY COMPANY SPECIFICATIONS AND LOCAL JURISDICTIONAL CODES, ORDINANCES AND APPLICABLE REGULATIONS.
8. THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT AND MATERIALS IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS UNLESS SPECIFICALLY STATED OTHERWISE.
9. THE CONTRACTOR SHALL CONTACT UTILITY LOCATING SERVICES INCLUDING PRIVATE LOCATES SERVICES PRIOR TO THE START OF CONSTRUCTION.
10. ALL EXISTING ACTIVE SEWER, WATER, GAS, ELECTRIC AND OTHER UTILITIES WHERE ENCOUNTERED IN THE WORK, SHALL BE PROTECTED AT ALL TIMES AND WHERE REQUIRED FOR THE PROPER EXECUTION OF THE WORK, SHALL BE RELOCATED AS DIRECTED BY CONTRACTOR. EXTREME CAUTION SHOULD BE USED BY THE CONTRACTOR WHEN EXCAVATING OR DRILLING PIERS AROUND OR NEAR UTILITIES. CONTRACTOR SHALL PROVIDE SAFETY TRAINING FOR THE WORKING CREW. THIS WILL INCLUDE BUT NOT BE LIMITED TO A) FALL PROTECTION B) CONFINED SPACE C) ELECTRICAL SAFETY D) TRENCHING AND EXCAVATION E) CONSTRUCTION SAFETY PROCEDURES.
11. ALL SITE WORK SHALL BE AS INDICATED ON THE STAMPED CONSTRUCTION DRAWINGS AND DISH PROJECT SPECIFICATIONS, LATEST APPROVED REVISION.
12. CONTRACTOR SHALL KEEP THE SITE FREE FROM ACCUMULATING WASTE MATERIAL, DEBRIS, AND TRASH AT THE COMPLETION OF THE WORK. IF NECESSARY, RUBBISH, STUMPS, DEBRIS, STICKS, STONES AND OTHER REFUSE SHALL BE REMOVED FROM THE SITE AND DISPOSED OF LEGALLY.
13. ALL EXISTING INACTIVE SEWER, WATER, GAS, ELECTRIC AND OTHER UTILITIES, WHICH INTERFERE WITH THE EXECUTION OF THE WORK, SHALL BE REMOVED AND/OR CAPPED, PLUGGED OR OTHERWISE DISCONTINUED AT POINTS WHICH WILL NOT INTERFERE WITH THE EXECUTION OF THE WORK, SUBJECT TO THE APPROVAL OF DISH Wireless L.L.C. AND TOWER OWNER, AND/OR LOCAL UTILITIES.
14. THE CONTRACTOR SHALL PROVIDE SITE SIGNAGE IN ACCORDANCE WITH THE TECHNICAL SPECIFICATION FOR SITE SIGNAGE REQUIRED BY LOCAL JURISDICTION AND SIGNAGE REQUIRED ON INDIVIDUAL PIECES OF EQUIPMENT, ROOMS, AND SHELTERS.
15. THE SITE SHALL BE GRADED TO CAUSE SURFACE WATER TO FLOW AWAY FROM THE CARRIER'S EQUIPMENT AND TOWER AREAS.
16. THE SUB GRADE SHALL BE COMPACTED AND BROUGHT TO A SMOOTH UNIFORM GRADE PRIOR TO FINISHED SURFACE APPLICATION.
17. THE AREAS OF THE OWNERS PROPERTY DISTURBED BY THE WORK AND NOT COVERED BY THE TOWER, EQUIPMENT OR DRIVEWAY, SHALL BE GRADED TO A UNIFORM SLOPE, AND STABILIZED TO PREVENT EROSION AS SPECIFIED ON THE CONSTRUCTION DRAWINGS AND/OR PROJECT SPECIFICATIONS.
18. CONTRACTOR SHALL MINIMIZE DISTURBANCE TO EXISTING SITE DURING CONSTRUCTION. EROSION CONTROL MEASURES, IF REQUIRED DURING CONSTRUCTION, SHALL BE IN CONFORMANCE WITH THE LOCAL GUIDELINES FOR EROSION AND SEDIMENT CONTROL.
19. THE CONTRACTOR SHALL PROTECT EXISTING IMPROVEMENTS, PAVEMENTS, CURBS, LANDSCAPING AND STRUCTURES. ANY DAMAGED PART SHALL BE REPAIRED AT CONTRACTOR'S EXPENSE TO THE SATISFACTION OF OWNER.
20. CONTRACTOR SHALL LEGALLY AND PROPERLY DISPOSE OF ALL SCRAP MATERIALS SUCH AS COAXIAL CABLES AND OTHER ITEMS REMOVED FROM THE EXISTING FACILITY. ANTENNAS AND RADIOS REMOVED SHALL BE RETURNED TO THE OWNER'S DESIGNATED LOCATION.
21. CONTRACTOR SHALL LEAVE PREMISES IN CLEAN CONDITION. TRASH AND DEBRIS SHOULD BE REMOVED FROM SITE ON A DAILY BASIS.
22. NO FILL OR EMBANKMENT MATERIAL SHALL BE PLACED ON FROZEN GROUND. FROZEN MATERIALS, SNOW OR ICE SHALL NOT BE PLACED IN ANY FILL OR EMBANKMENT.

GENERAL NOTES:

- 1.FOR THE PURPOSE OF CONSTRUCTION DRAWING, THE FOLLOWING DEFINITIONS SHALL APPLY:
CONTRACTOR:GENERAL CONTRACTOR RESPONSIBLE FOR CONSTRUCTION
CARRIER:DISH Wireless L.L.C.
TOWER OWNER:TOWER OWNER
2. THESE DRAWINGS HAVE BEEN PREPARED USING STANDARDS OF PROFESSIONAL CARE AND COMPLETENESS NORMALLY EXERCISED UNDER SIMILAR CIRCUMSTANCES BY REPUTABLE ENGINEERS IN THIS OR SIMILAR LOCALITIES. IT IS ASSUMED THAT THE WORK DEPICTED WILL BE PERFORMED BY AN EXPERIENCED CONTRACTOR AND/OR WORKPEOPLE WHO HAVE A WORKING KNOWLEDGE OF THE APPLICABLE CODE STANDARDS AND REQUIREMENTS AND OF INDUSTRY ACCEPTED STANDARD GOOD PRACTICE. AS NOT EVERY CONDITION OR ELEMENT IS (OR CAN BE) EXPLICITLY SHOWN ON THESE DRAWINGS, THE CONTRACTOR SHALL USE INDUSTRY ACCEPTED STANDARD GOOD PRACTICE FOR MISCELLANEOUS WORK NOT EXPLICITLY SHOWN.
3. THESE DRAWINGS REPRESENT THE FINISHED STRUCTURE. THEY DO NOT INDICATE THE MEANS OR METHODS OF CONSTRUCTION. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR THE CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, AND PROCEDURES. THE CONTRACTOR SHALL PROVIDE ALL MEASURES NECESSARY FOR PROTECTION OF LIFE AND PROPERTY DURING CONSTRUCTION. SUCH MEASURES SHALL INCLUDE, BUT NOT BE LIMITED TO, BRACING, FORMWORK, SHORING, ETC. SITE VISITS BY THE ENGINEER OR HIS REPRESENTATIVE WILL NOT INCLUDE INSPECTION OF THESE ITEMS AND IS FOR STRUCTURAL OBSERVATION OF THE FINISHED STRUCTURE ONLY.
4. NOTES AND DETAILS IN THE CONSTRUCTION DRAWINGS SHALL TAKE PRECEDENCE OVER GENERAL NOTES AND TYPICAL DETAILS. WHERE NO DETAILS ARE SHOWN, CONSTRUCTION SHALL CONFORM TO SIMILAR WORK ON THE PROJECT, AND/OR AS PROVIDED FOR IN THE CONTRACT DOCUMENTS. WHERE DISCREPANCIES OCCUR BETWEEN PLANS, DETAILS, GENERAL NOTES, AND SPECIFICATIONS, THE GREATER, MORE STRICT REQUIREMENTS, SHALL GOVERN. IF FURTHER CLARIFICATION IS REQUIRED CONTACT THE ENGINEER OF RECORD.
5. SUBSTANTIAL EFFORT HAS BEEN MADE TO PROVIDE ACCURATE DIMENSIONS AND MEASUREMENTS ON THE DRAWINGS TO ASSIST IN THE FABRICATION AND/OR PLACEMENT OF CONSTRUCTION ELEMENTS BUT IT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO FIELD VERIFY THE DIMENSIONS, MEASUREMENTS, AND/OR CLEARANCES SHOWN IN THE CONSTRUCTION DRAWINGS PRIOR TO FABRICATION OR CUTTING OF ANY NEW OR EXISTING CONSTRUCTION ELEMENTS. IF IT IS DETERMINED THAT THERE ARE DISCREPANCIES AND/OR CONFLICTS WITH THE CONSTRUCTION DRAWINGS THE ENGINEER OF RECORD IS TO BE NOTIFIED AS SOON AS POSSIBLE.
6. PRIOR TO THE SUBMISSION OF BIDS, THE BIDDING CONTRACTOR SHALL VISIT THE CELL SITE TO FAMILIARIZE WITH THE EXISTING CONDITIONS AND TO CONFIRM THAT THE WORK CAN BE ACCOMPLISHED AS SHOWN ON THE CONSTRUCTION DRAWINGS. ANY DISCREPANCY FOUND SHALL BE BROUGHT TO THE ATTENTION OF CARRIER POC AND TOWER OWNER.
7. ALL MATERIALS FURNISHED AND INSTALLED SHALL BE IN STRICT ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS AND ORDINANCES. CONTRACTOR SHALL ISSUE ALL APPROPRIATE NOTICES AND COMPLY WITH ALL LAWS, ORDINANCES, RULES, REGULATIONS AND LAWFUL ORDERS OF ANY PUBLIC AUTHORITY REGARDING THE PERFORMANCE OF THE WORK. ALL WORK CARRIED OUT SHALL COMPLY WITH ALL APPLICABLE MUNICIPAL AND UTILITY COMPANY SPECIFICATIONS AND LOCAL JURISDICTIONAL CODES, ORDINANCES AND APPLICABLE REGULATIONS.
8. UNLESS NOTED OTHERWISE, THE WORK SHALL INCLUDE FURNISHING MATERIALS, EQUIPMENT, APPURTENANCES AND LABOR NECESSARY TO COMPLETE ALL INSTALLATIONS AS INDICATED ON THE DRAWINGS.
9. THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT AND MATERIALS IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS UNLESS SPECIFICALLY STATED OTHERWISE.
10. IF THE SPECIFIED EQUIPMENT CAN NOT BE INSTALLED AS SHOWN ON THESE DRAWINGS, THE CONTRACTOR SHALL PROPOSE AN ALTERNATIVE INSTALLATION FOR APPROVAL BY THE CARRIER AND TOWER OWNER PRIOR TO PROCEEDING WITH ANY SUCH CHANGE OF INSTALLATION.
11. CONTRACTOR IS TO PERFORM A SITE INVESTIGATION, BEFORE SUBMITTING BIDS, TO DETERMINE THE BEST ROUTING OF ALL CONDUITS FOR POWER, AND TELCO AND FOR GROUNDING CABLES AS SHOWN IN THE POWER, TELCO, AND GROUNDING PLAN DRAWINGS.
12. THE CONTRACTOR SHALL PROTECT EXISTING IMPROVEMENTS, PAVEMENTS, CURBS, LANDSCAPING AND STRUCTURES. ANY DAMAGED PART SHALL BE REPAIRED AT CONTRACTOR'S EXPENSE TO THE SATISFACTION OF DISH Wireless L.L.C. AND TOWER OWNER
13. CONTRACTOR SHALL LEGALLY AND PROPERLY DISPOSE OF ALL SCRAP MATERIALS SUCH AS COAXIAL CABLES AND OTHER ITEMS REMOVED FROM THE EXISTING FACILITY. ANTENNAS REMOVED SHALL BE RETURNED TO THE OWNER'S DESIGNATED LOCATION.
14. CONTRACTOR SHALL LEAVE PREMISES IN CLEAN CONDITION. TRASH AND DEBRIS SHOULD BE REMOVED FROM SITE ON A DAILY BASIS.




5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY:	CHECKED BY:	APPROVED BY:
RK	BEH	BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
GENERAL NOTES

SHEET NUMBER
GN-3

CONCRETE, FOUNDATIONS, AND REINFORCING STEEL:

- ALL CONCRETE WORK SHALL BE IN ACCORDANCE WITH THE ACI 301, ACI 318, ACI 336, ASTM A184, ASTM A185 AND THE DESIGN AND CONSTRUCTION SPECIFICATION FOR CAST-IN-PLACE CONCRETE.
- UNLESS NOTED OTHERWISE, SOIL BEARING PRESSURE USED FOR DESIGN OF SLABS AND FOUNDATIONS IS ASSUMED TO BE 1000 psf.
- ALL CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH (f'c) OF 3000 psi AT 28 DAYS, UNLESS NOTED OTHERWISE. NO MORE THAN 90 MINUTES SHALL ELAPSE FROM BATCH TIME TO TIME OF PLACEMENT UNLESS APPROVED BY THE ENGINEER OF RECORD. TEMPERATURE OF CONCRETE SHALL NOT EXCEED 90°f AT TIME OF PLACEMENT.
- CONCRETE EXPOSED TO FREEZE-THAW CYCLES SHALL CONTAIN AIR ENTRAINING ADMIXTURES. AMOUNT OF AIR ENTRAINMENT TO BE BASED ON SIZE OF AGGREGATE AND F3 CLASS EXPOSURE (VERY SEVERE). CEMENT USED TO BE TYPE II PORTLAND CEMENT WITH A MAXIMUM WATER-TO-CEMENT RATIO (W/C) OF 0.45.
- ALL STEEL REINFORCING SHALL CONFORM TO ASTM A615. ALL WELDED WIRE FABRIC (WWF) SHALL CONFORM TO ASTM A185. ALL SPLICES SHALL BE CLASS "B" TENSION SPLICES, UNLESS NOTED OTHERWISE. ALL HOOKS SHALL BE STANDARD 90 DEGREE HOOKS, UNLESS NOTED OTHERWISE. YIELD STRENGTH (Fy) OF STANDARD DEFORMED BARS ARE AS FOLLOWS:
 #4 BARS AND SMALLER 40 ksi
 #5 BARS AND LARGER 60 ksi
- THE FOLLOWING MINIMUM CONCRETE COVER SHALL BE PROVIDED FOR REINFORCING STEEL UNLESS SHOWN OTHERWISE ON DRAWINGS:
 - CONCRETE CAST AGAINST AND PERMANENTLY EXPOSED TO EARTH 3"
 - CONCRETE EXPOSED TO EARTH OR WEATHER:
 - #6 BARS AND LARGER 2"
 - #5 BARS AND SMALLER 1-1/2"
 - CONCRETE NOT EXPOSED TO EARTH OR WEATHER:
 - SLAB AND WALLS 3/4"
 - BEAMS AND COLUMNS 1-1/2"
- A TOOLED EDGE OR A 3/4" CHAMFER SHALL BE PROVIDED AT ALL EXPOSED EDGES OF CONCRETE, UNLESS NOTED OTHERWISE, IN ACCORDANCE WITH ACI 301 SECTION 4.2.4.

ELECTRICAL INSTALLATION NOTES:

- ALL ELECTRICAL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS, NEC AND ALL APPLICABLE FEDERAL, STATE, AND LOCAL CODES/ORDINANCES.
- CONDUIT ROUTINGS ARE SCHEMATIC. CONTRACTOR SHALL INSTALL CONDUITS SO THAT ACCESS TO EQUIPMENT IS NOT BLOCKED AND TRIP HAZARDS ARE ELIMINATED.
- WIRING, RACEWAY AND SUPPORT METHODS AND MATERIALS SHALL COMPLY WITH THE REQUIREMENTS OF THE NEC.
- ALL CIRCUITS SHALL BE SEGREGATED AND MAINTAIN MINIMUM CABLE SEPARATION AS REQUIRED BY THE NEC.
 - ALL EQUIPMENT SHALL BEAR THE UNDERWRITERS LABORATORIES LABEL OF APPROVAL, AND SHALL CONFORM TO REQUIREMENT OF THE NATIONAL ELECTRICAL CODE.
 - ALL OVERCURRENT DEVICES SHALL HAVE AN INTERRUPTING CURRENT RATING THAT SHALL BE GREATER THAN THE SHORT CIRCUIT CURRENT TO WHICH THEY ARE SUBJECTED, 22,000 AIC MINIMUM. VERIFY AVAILABLE SHORT CIRCUIT CURRENT DOES NOT EXCEED THE RATING OF ELECTRICAL EQUIPMENT IN ACCORDANCE WITH ARTICLE 110.24 NEC OR THE MOST CURRENT ADOPTED CODE PRE THE GOVERNING JURISDICTION.
- EACH END OF EVERY POWER PHASE CONDUCTOR, GROUNDING CONDUCTOR, AND TELCO CONDUCTOR OR CABLE SHALL BE LABELED WITH COLOR-CODED INSULATION OR ELECTRICAL TAPE (3M BRAND, 1/2" PLASTIC ELECTRICAL TAPE WITH UV PROTECTION, OR EQUAL). THE IDENTIFICATION METHOD SHALL CONFORM WITH NEC AND OSHA.
- ALL ELECTRICAL COMPONENTS SHALL BE CLEARLY LABELED WITH LAMICOID TAGS SHOWING THEIR RATED VOLTAGE, PHASE CONFIGURATION, WIRE CONFIGURATION, POWER OR AMPACITY RATING AND BRANCH CIRCUIT ID NUMBERS (i.e. PANEL BOARD AND CIRCUIT ID'S).
- PANEL BOARDS (ID NUMBERS) SHALL BE CLEARLY LABELED WITH PLASTIC LABELS.
- TIE WRAPS ARE NOT ALLOWED.
- ALL POWER AND EQUIPMENT GROUND WIRING IN TUBING OR CONDUIT SHALL BE SINGLE COPPER CONDUCTOR (#14 OR LARGER) WITH TYPE THHW, THWN, THWN-2, XHHW, XHHW-2, THW, THW-2, RHW, OR RHW-2 INSULATION UNLESS OTHERWISE SPECIFIED.
- SUPPLEMENTAL EQUIPMENT GROUND WIRING LOCATED INDOORS SHALL BE SINGLE COPPER CONDUCTOR (#6 OR LARGER) WITH TYPE THHW, THWN, THWN-2, XHHW, XHHW-2, THW, THW-2, RHW, OR RHW-2 INSULATION UNLESS OTHERWISE SPECIFIED.
- POWER AND CONTROL WIRING IN FLEXIBLE CORD SHALL BE MULTI-CONDUCTOR, TYPE SOOW CORD (#14 OR LARGER) UNLESS OTHERWISE SPECIFIED.
- POWER AND CONTROL WIRING FOR USE IN CABLE TRAY SHALL BE MULTI-CONDUCTOR, TYPE TC CABLE (#14 OR LARGER), WITH TYPE THHW, THWN, THWN-2, XHHW, XHHW-2, THW, THW-2, RHW, OR RHW-2 INSULATION UNLESS OTHERWISE SPECIFIED.
- ALL POWER AND GROUNDING CONNECTIONS SHALL BE CRIMP-STYLE, COMPRESSION WIRE LUGS AND WIRE NUTS BY THOMAS AND BETTS (OR EQUAL). LUGS AND WIRE NUTS SHALL BE RATED FOR OPERATION NOT LESS THAN 75° C (90° C IF AVAILABLE).
- RACEWAY AND CABLE TRAY SHALL BE LISTED OR LABELED FOR ELECTRICAL USE IN ACCORDANCE WITH NEMA, UL, ANSI/IEEE AND NEC.
- ELECTRICAL METALLIC TUBING (EMT), INTERMEDIATE METAL CONDUIT (IMC), OR RIGID METAL CONDUIT (RMC) SHALL BE USED FOR EXPOSED INDOOR LOCATIONS.

- ELECTRICAL METALLIC TUBING (EMT) OR METAL-CLAD CABLE (MC) SHALL BE USED FOR CONCEALED INDOOR LOCATIONS.
- SCHEDULE 40 PVC UNDERGROUND ON STRAIGHTS AND SCHEDULE 80 PVC FOR ALL ELBOWS/90s AND ALL APPROVED ABOVE GRADE PVC CONDUIT.
- LIQUID-TIGHT FLEXIBLE METALLIC CONDUIT (LIQUID-TITE FLEX) SHALL BE USED INDOORS AND OUTDOORS, WHERE VIBRATION OCCURS OR FLEXIBILITY IS NEEDED.
- CONDUIT AND TUBING FITTINGS SHALL BE THREADED OR COMPRESSION-TYPE AND APPROVED FOR THE LOCATION USED. SET SCREW FITTINGS ARE NOT ACCEPTABLE.
- CABINETS, BOXES AND WIRE WAYS SHALL BE LABELED FOR ELECTRICAL USE IN ACCORDANCE WITH NEMA, UL, ANSI/IEEE AND THE NEC.
- WIREWAYS SHALL BE METAL WITH AN ENAMEL FINISH AND INCLUDE A HINGED COVER, DESIGNED TO SWING OPEN DOWNWARDS (WIREMOLD SPECMATE WIREWAY).
- SLOTTED WIRING DUCT SHALL BE PVC AND INCLUDE COVER (PANDUIT TYPE E OR EQUAL).
- CONDUITS SHALL BE FASTENED SECURELY IN PLACE WITH APPROVED NON-PERFORATED STRAPS AND HANGERS. EXPLOSIVE DEVICES (i.e. POWDER-ACTUATED) FOR ATTACHING HANGERS TO STRUCTURE WILL NOT BE PERMITTED. CLOSELY FOLLOW THE LINES OF THE STRUCTURE, MAINTAIN CLOSE PROXIMITY TO THE STRUCTURE AND KEEP CONDUITS IN TIGHT ENVELOPES. CHANGES IN DIRECTION TO ROUTE AROUND OBSTACLES SHALL BE MADE WITH CONDUIT OUTLET BODIES. CONDUIT SHALL BE INSTALLED IN A NEAT AND WORKMANLIKE MANNER. PARALLEL AND PERPENDICULAR TO STRUCTURE WALL AND CEILING LINES. ALL CONDUIT SHALL BE FISHED TO CLEAR OBSTRUCTIONS. ENDS OF CONDUITS SHALL BE TEMPORARILY CAPPED FLUSH TO FINISH GRADE TO PREVENT CONCRETE, PLASTER OR DIRT FROM ENTERING. CONDUITS SHALL BE RIGIDLY CLAMPED TO BOXES BY GALVANIZED MALLEABLE IRON BUSHING ON INSIDE AND GALVANIZED MALLEABLE IRON LOCKNUT ON OUTSIDE AND INSIDE.
- EQUIPMENT CABINETS, TERMINAL BOXES, JUNCTION BOXES AND PULL BOXES SHALL BE GALVANIZED OR EPOXY-COATED SHEET STEEL. SHALL MEET OR EXCEED UL 50 AND BE RATED NEMA 1 (OR BETTER) FOR INTERIOR LOCATIONS AND NEMA 3 (OR BETTER) FOR EXTERIOR LOCATIONS.
- METAL RECEPTACLE, SWITCH AND DEVICE BOXES SHALL BE GALVANIZED, EPOXY-COATED OR NON-CORRODING; SHALL MEET OR EXCEED UL 514A AND NEMA OS 1 AND BE RATED NEMA 1 (OR BETTER) FOR INTERIOR LOCATIONS AND WEATHER PROTECTED (WP OR BETTER) FOR EXTERIOR LOCATIONS.
- NONMETALLIC RECEPTACLE, SWITCH AND DEVICE BOXES SHALL MEET OR EXCEED NEMA OS 2 (NEWEST REVISION) AND BE RATED NEMA 1 (OR BETTER) FOR INTERIOR LOCATIONS AND WEATHER PROTECTED (WP OR BETTER) FOR EXTERIOR LOCATIONS.
- THE CONTRACTOR SHALL NOTIFY AND OBTAIN NECESSARY AUTHORIZATION FROM THE CARRIER AND/OR DISH Wireless L.L.C. AND TOWER OWNER BEFORE COMMENCING WORK ON THE AC POWER DISTRIBUTION PANELS.
- THE CONTRACTOR SHALL PROVIDE NECESSARY TAGGING ON THE BREAKERS, CABLES AND DISTRIBUTION PANELS IN ACCORDANCE WITH THE APPLICABLE CODES AND STANDARDS TO SAFEGUARD LIFE AND PROPERTY.
- INSTALL LAMICOID LABEL ON THE METER CENTER TO SHOW "DISH Wireless L.L.C."
- ALL EMPTY/SPARE CONDUITS THAT ARE INSTALLED ARE TO HAVE A METERED MULE TAPE PULL CORD INSTALLED.



5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY:	CHECKED BY:	APPROVED BY:
RK	BEH	BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
GENERAL NOTES

SHEET NUMBER
GN-4

GROUNDING NOTES:

1. ALL GROUND ELECTRODE SYSTEMS (INCLUDING TELECOMMUNICATION, RADIO, LIGHTNING PROTECTION AND AC POWER GES'S) SHALL BE BONDED TOGETHER AT OR BELOW GRADE, BY TWO OR MORE COPPER BONDING CONDUCTORS IN ACCORDANCE WITH THE NEC.
2. THE CONTRACTOR SHALL PERFORM IEEE FALL-OF-POTENTIAL RESISTANCE TO EARTH TESTING (PER IEEE 1100 AND 81) FOR GROUND ELECTRODE SYSTEMS, THE CONTRACTOR SHALL FURNISH AND INSTALL SUPPLEMENTAL GROUND ELECTRODES AS NEEDED TO ACHIEVE A TEST RESULT OF 5 OHMS OR LESS.
3. THE CONTRACTOR IS RESPONSIBLE FOR PROPERLY SEQUENCING GROUNDING AND UNDERGROUND CONDUIT INSTALLATION AS TO PREVENT ANY LOSS OF CONTINUITY IN THE GROUNDING SYSTEM OR DAMAGE TO THE CONDUIT AND PROVIDE TESTING RESULTS.
4. METAL CONDUIT AND TRAY SHALL BE GROUNDED AND MADE ELECTRICALLY CONTINUOUS WITH LISTED BONDING FITTINGS OR BY BONDING ACROSS THE DISCONTINUITY WITH #6 COPPER WIRE UL APPROVED GROUNDING TYPE CONDUIT CLAMPS.
5. METAL RACEWAY SHALL NOT BE USED AS THE NEC REQUIRED EQUIPMENT GROUND CONDUCTOR. STRANDED COPPER CONDUCTORS WITH GREEN INSULATION, SIZED IN ACCORDANCE WITH THE NEC, SHALL BE FURNISHED AND INSTALLED WITH THE POWER CIRCUITS TO BTS EQUIPMENT.
6. EACH CABINET FRAME SHALL BE DIRECTLY CONNECTED TO THE MASTER GROUND BAR WITH GREEN INSULATED SUPPLEMENTAL EQUIPMENT GROUND WIRES, #6 STRANDED COPPER OR LARGER FOR INDOOR BTS; #2 BARE SOLID TINNED COPPER FOR OUTDOOR BTS.
7. CONNECTIONS TO THE GROUND BUS SHALL NOT BE DOUBLED UP OR STACKED BACK TO BACK CONNECTIONS ON OPPOSITE SIDE OF THE GROUND BUS ARE PERMITTED.
8. ALL EXTERIOR GROUND CONDUCTORS BETWEEN EQUIPMENT/GROUND BARS AND THE GROUND RING SHALL BE #2 SOLID TINNED COPPER UNLESS OTHERWISE INDICATED.
9. ALUMINUM CONDUCTOR OR COPPER CLAD STEEL CONDUCTOR SHALL NOT BE USED FOR GROUNDING CONNECTIONS.
10. USE OF 90° BENDS IN THE PROTECTION GROUNDING CONDUCTORS SHALL BE AVOIDED WHEN 45° BENDS CAN BE ADEQUATELY SUPPORTED.
11. EXOTHERMIC WELDS SHALL BE USED FOR ALL GROUNDING CONNECTIONS BELOW GRADE.
12. ALL GROUND CONNECTIONS ABOVE GRADE (INTERIOR AND EXTERIOR) SHALL BE FORMED USING HIGH PRESS CRIMPS.
13. COMPRESSION GROUND CONNECTIONS MAY BE REPLACED BY EXOTHERMIC WELD CONNECTIONS.
14. ICE BRIDGE BONDING CONDUCTORS SHALL BE EXOTHERMICALLY BONDED OR BOLTED TO THE BRIDGE AND THE TOWER GROUND BAR.
15. APPROVED ANTIOXIDANT COATINGS (i.e. CONDUCTIVE GEL OR PASTE) SHALL BE USED ON ALL COMPRESSION AND BOLTED GROUND CONNECTIONS.
16. ALL EXTERIOR GROUND CONNECTIONS SHALL BE COATED WITH A CORROSION RESISTANT MATERIAL.
17. MISCELLANEOUS ELECTRICAL AND NON-ELECTRICAL METAL BOXES, FRAMES AND SUPPORTS SHALL BE BONDED TO THE GROUND RING, IN ACCORDANCE WITH THE NEC.
18. BOND ALL METALLIC OBJECTS WITHIN 6 ft OF MAIN GROUND RING WITH (1) #2 BARE SOLID TINNED COPPER GROUND CONDUCTOR.
19. GROUND CONDUCTORS USED FOR THE FACILITY GROUNDING AND LIGHTNING PROTECTION SYSTEMS SHALL NOT BE ROUTED THROUGH METALLIC OBJECTS THAT FORM A RING AROUND THE CONDUCTOR, SUCH AS METALLIC CONDUITS, METAL SUPPORT CLIPS OR SLEEVES THROUGH WALLS OR FLOORS. WHEN IT IS REQUIRED TO BE HOUSED IN CONDUIT TO MEET CODE REQUIREMENTS OR LOCAL CONDITIONS, NON-METALLIC MATERIAL SUCH AS PVC CONDUIT SHALL BE USED. WHERE USE OF METAL CONDUIT IS UNAVOIDABLE (i.e., NONMETALLIC CONDUIT PROHIBITED BY LOCAL CODE) THE GROUND CONDUCTOR SHALL BE BONDED TO EACH END OF THE METAL CONDUIT.
20. ALL GROUNDS THAT TRANSITION FROM BELOW GRADE TO ABOVE GRADE MUST BE #2 BARE SOLID TINNED COPPER IN 3/4" NON-METALLIC, FLEXIBLE CONDUIT FROM 24" BELOW GRADE TO WITHIN 3" TO 6" OF CAD-WELD TERMINATION POINT. THE EXPOSED END OF THE CONDUIT MUST BE SEALED WITH SILICONE CAULK. (ADD TRANSITIONING GROUND STANDARD DETAIL AS WELL).
21. BUILDINGS WHERE THE MAIN GROUNDING CONDUCTORS ARE REQUIRED TO BE ROUTED TO GRADE, THE CONTRACTOR SHALL ROUTE TWO GROUNDING CONDUCTORS FROM THE ROOFTOP, TOWERS, AND WATER TOWERS GROUNDING RING, TO THE EXISTING GROUNDING SYSTEM, THE GROUNDING CONDUCTORS SHALL NOT BE SMALLER THAN 2/0 COPPER. ROOFTOP GROUNDING RING SHALL BE BONDED TO THE EXISTING GROUNDING SYSTEM, THE BUILDING STEEL COLUMNS, LIGHTNING PROTECTION SYSTEM, AND BUILDING MAIN WATER LINE (FERROUS OR NONFERROUS METAL PIPING ONLY). DO NOT ATTACH GROUNDING TO FIRE SPRINKLER SYSTEM PIPES.



5701 SOUTH SANTA FE DRIVE
LITTLETON, CO 80120



8051 CONGRESS AVENUE
BOCA RATON, FL 33487



1717 S. BOULDER
SUITE 300
TULSA, OK 74119
PH: (918) 587-4630
www.btgrp.com



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

DRAWN BY:	CHECKED BY:	APPROVED BY:
RK	BEH	BEH

RFDS REV #: 1.0

CONSTRUCTION DOCUMENTS

SUBMITTALS		
REV	DATE	DESCRIPTION
A	6/20/22	ISSUED FOR REVIEW
0	7/1/22	ISSUED FOR CONSTRUCTION
1	7/13/22	ISSUED FOR CONSTRUCTION

A&E PROJECT NUMBER
149543.001.01

DISH Wireless L.L.C.
PROJECT INFORMATION
BOHVN00180A
331 KILLINGWORTH ROAD
(RT-80)
GUILFORD, CT 06437

SHEET TITLE
GENERAL NOTES

SHEET NUMBER
GN-5

Exhibit D

Structural Analysis Report



Tower Engineering Solutions

Phone (972) 483-0607, Fax (972) 975-9615
1320 Greenway Drive, Suite 600, Irving, Texas 75038

Structural Analysis Report

Existing 152 ft Rohn Self Supporting Tower

Customer Name: SBA Communications Corp

Customer Site Number: CT13065-A

Customer Site Name: Guilford

Carrier Name: Dish Wireless (App#: 169197-1)

Carrier Site ID / Name: BOHVN00180A / 0

Site Location: 331 Killingworth Road (Rt 80)

Guilford, Connecticut

New Haven County

Latitude: 41.353164

Longitude: -72.688252



Analysis Result:

Max Structural Usage: 104.7% [Fail]

Max Foundation Usage: 74.0% [Pass]

Additional Usage Caused by New Mount/Mount Modification: N/A

Report Prepared By: Mohammed Al Rubaye



Tower Engineering Solutions

Phone (972) 483-0607, Fax (972) 975-9615
1320 Greenway Drive, Suite 600, Irving, Texas 75038

Structural Analysis Report

Existing 152 ft Rohn Self Supporting Tower

Customer Name: SBA Communications Corp

Customer Site Number: CT13065-A

Customer Site Name: Guilford

Carrier Name: Dish Wireless (App#: 169197-1)

Carrier Site ID / Name: BOHVN00180A / 0

Site Location: 331 Killingworth Road (Rt 80)

Guilford, Connecticut

New Haven County

Latitude: 41.353164

Longitude: -72.688252

Analysis Result:

Max Structural Usage: 104.7% [Fail]

Max Foundation Usage: 74.0% [Pass]

Additional Usage Caused by New Mount/Mount Modification: N/A

Report Prepared By: Mohammed Al Rubaye

Introduction

The purpose of this report is to summarize the analysis results on the 152 ft Rohn Self Supporting Tower to support the proposed antennas and transmission lines in addition to those currently installed.

The pending modification by **TES** listed under Sources of Information was also considered completed and was included in this analysis.

Sources of Information

Tower Drawings	Rohn, Dwg # C851129, dated 8/6/1985
Foundation Drawing	FDH, Project # 09-03151E N1, dated 6/10/2009
Geotechnical Report	FDH, Project # 09-03151EG1, dated 5/5/2009
Modification Drawings	All-Points Technology Corp., Job # CT2001D1, dated 4/28/05 FDH, Project # 09-03151E S2, dated 9/4/09 FDH, Project # 11-10199E S2, dated 4/19/12 FDH, Project # 12-04638E S3, dated 2/6/13 FDH, Project # 15BEQG1400, dated 2/27/15 FDH, Project # 14664X1400, dated 5/29/14
Pending Modification	TES Pending Job # 121728

Analysis Criteria

The rigorous analysis was performed in accordance with the requirements and stipulations of the TIA-222-G. In accordance with this standard, the structure was analyzed using **TESTowers**, a proprietary analysis software. The program considers the structure as an elastic 3-D model with second-order effects and temperature effects incorporated in the analysis. The analysis was performed using multiple wind directions.

Wind Speed Used in the Analysis:	Ultimate Design Wind Speed $V_{ult} = 130.0$ mph (3-Sec. Gust)/ Nominal Design Wind Speed $V_{asd} = 101.0$ mph (3-Sec. Gust)
Basic Wind Speed with Ice:	50 mph (3-Sec. Gust) with 3/4" radial ice concurrent
Operational Wind Speed:	60 mph + 0" Radial ice
Standard/Codes:	TIA-222-G-2 / 2015 IBC / 2018 Connecticut State Building Code
Exposure Category:	B
Structure Class:	II
Topographic Category:	1
Crest Height:	0 ft

This structural analysis is based upon the tower being classified as Structure Class II; however, if a different classification is required subsequent to the date hereof, the tower classification will be changed to meet such requirement and a new structural analysis will be run.

Existing Antennas, Mounts and Transmission Lines

The table below summarizes the antennas, mounts and transmission lines that were considered in the analysis as existing on the tower.

Items	Elevation (ft)	Qty.	Antenna Descriptions	Mount Type & Qty.	Transmission Lines	Owner
1	157.0	1	Phillips Dodge 201-7 Omni	Leg	(1) 7/8"	TCI Cablevision
2	149.0	3	Powerwave - 7770 - Panel	(3) Sector Frames w/ Mods	(12) 1 5/8" (1) 3" Conduit (Housing (1) 1/2" Fiber & (2) 3/4" DC) (1) 1/2" Fiber (2) 3/4" DC	AT&T
3		3	CCI - HPA-65R-BU6AA - Panel			
4		3	Kathrein - 800-10965 - Panel			
5		3	CCI - OPA65R-BU6DA - Panel			
6		6	Powerwave - LGP21401 TMA			
7		6	Powerwave - LGP21901 Diplexer			
8		6	Powerwave - 7020.00 RET			
9		3	Powerwave - 7070 RET			
10		3	Ericsson - 4449 B5/B12 RRU			
11		3	Ericsson - 4415 B30 RRU			
12		3	Ericsson - RRUS 8843 B2 B66A RRU			
13		3	Ericsson - RRUS-4478 B14 RRU			
14		2	Raycap - DC6-48-60-18-8F ("Squid") - OVP			
15		1	Raycap - DC6-48-60-18-8C-EV - OVP			
16	139.0	3	RFS - APXVAALL24_43-U-NA20 - Panel	(3) Sector Frames	(3) 1.9" Fiber	T-Mobile Sprint
17		3	Commscope- VV-65A-R1 - Panel			
18		3	Ericsson - AIR6449 B41 - Panel			
19		4	RFS- ACU-A20-N -RET			
20		3	Ericsson- 4460 B25 + B66 -RRU			
21		3	ALU- 800 MHz- RRU			
22		3	Ericsson- 4480 B71 + B85 -RRU			
23		3	ALU- 800 MHz External Notch Filter			
24	128.0	6	Commscope - NHH-65B-R2B - Panel	(3) V-Frames VFA12-HD	(12) 1 5/8" (1) 1 5/8" Hybrid	Verizon
25		3	Samsung - MT6407-77A - Panel			
26		2	Andrew - LNX-6513DS-A1M_0 - Panel			
27		1	Andrew - LNX-6514DS-A1M - Panel			
28		3	Samsung - RF4440d-13A RRU			
29		3	Samsung - RF4439d-25A RRU			
30	1	Commscope - FE-16148-OVP-B12				
35	83.5	1	DB26 GPS	Leg	(1) 1/2"	Sprint

Proposed Carrier's Final Configuration of Antennas, Mounts and Transmission Lines

Information pertaining to the proposed carrier's final configuration of antennas and transmission lines was provided by SBA Communications Corp. The proposed antennas and lines are listed below.

Items	Elevation (ft)	Qty.	Antenna Descriptions	Mount Type & Qty.	Transmission Lines	Owner
30	105.0	3	JMA Wireless - MX08FRO665-21 - Panel	(3) Commscope MTC3975083	(1) 1.6" Hybrid	Dish Wireless
31		3	Fujitsu - TA08025-B604			
32		3	Fujitsu - TA08025-B605			
33		1	Raycap - RDIDC-9181-PF-48 - OVP			

See the attached coax layout for the line placement considered in the analysis.

Analysis Results

The results of the structural analysis, performed for the wind and ice loading and antenna equipment as defined above, are summarized as the following:

Tower Component	Legs	Diagonals	Horizontals	Anchor Bolts
Max. Usage:	102.7%	104.7%	24.2%	99.0%
Pass/Fail	Pass	Pass	Pass	Pass

Foundations

	Compression (Kips)	Uplift (Kips)	Shear (Kips)
Analysis Reactions	227.3	195.5	23.9

The foundation has been investigated using the supplied documents and soils report and was found adequate. Therefore, no modification to the foundation will be required.

Operational Condition (Rigidity):

Operational characteristics of the tower are found to be within the limits prescribed by TIA-222 for the installed antennas. The maximum twist/sway at the elevation of the proposed equipment is 0.1481 degrees under the operational wind speed as specified in the Analysis Criteria.

Conclusions

Based on the analysis results, the existing structure was found inadequate to safely support the existing and proposed equipment per the TIA-222 Standard under the design basic wind speed specified in the Analysis Criteria. The following modifications to the existing structure will be required.

- **Reinforce legs from 30-40', 66.8-80'**
- **Reinforce diagonals from 73.3'-80.0'**

A modification packet (including design drawings) can be provided under a separate scope of work.

Standard Conditions

1. This analysis was performed based on the information supplied to **(TES) Tower Engineering Solutions, LLC**. Verification of the information provided was not included in the Scope of Work for **TES**. The accuracy of the analysis is dependent on the accuracy of the information provided.
2. The structural analysis was performance based upon the evidence available at the time of this report. All information provided by the client is considered to be accurate.
3. The analyses will be performed based on the codes as specified by the client or based on the best knowledge of the engineering staff of **TES**. In the absence of information to the contrary, all work will be performed in accordance with the latest relevant revision of ANSI/TIA-222. If wind speed and/or ice loads are different from the minimum values recommended by the ANSI/TIA-222 standard or other codes, **TES** should be notified in writing and the applicable minimum values provided by the client.
4. The configuration of the existing mounts, antennas, coax and other appurtenances were supplied by the customer for the current structural analysis. **TES** has not visited the tower site to verify the adequacy of the information provided. If there is any discrepancy found in the report regarding the existing conditions, **TES** should be notified immediately to evaluate the effect of the discrepancy on the analysis results.
5. The client will assume responsibility for rework associated with the differences in initially provided information, including tower and foundation information, existing and/or proposed equipment and transmission lines.
6. If a feasibility analysis was performed, final acceptance of changed conditions shall be based upon a rigorous structural analysis.

Structure: CT13065-A-SBA

Site Name: Guilford	Code: TIA-222-G	4/26/2022
Type: Self Support	Base Shape: Triangle	Basic WS: 101.00
Height: 152.00 (ft)	Base Width: 20.78	Basic Ice WS: 50.00
Base Elev: 0.00 (ft)	Top Width: 6.52	Operational WS: 60.00




Page: 1

Section Properties

Sect	Leg Members	Diagonal Members	Horizontal Members
1	MOD 5"PST+6"PX1/2P	SAE 3.5X3.5X0.25	
2	MOD 4"PX+5"PX1/2P	SAE 3X3X0.375	
3	PX 4" DIA PIPE	SAE 3X3X0.375	
4-5	PX 4" DIA PIPE	SAE 3X3X0.25	
6	MOD 3"PX+4"PX1/2P	SAE 2.5X2.5X0.25	
7	PX 3" DIA PIPE	SAE 2.5X2.5X0.25	
8	PX 3" DIA PIPE	SAE 2.5X2.5X0.1875	
9	MOD 2.5"PX+3"PX1/2P	SAE 2X2X0.375	
10	MOD 2.5"PX+3.5"PX1/2	SAE 2X2X0.375	
11	PX 2-1/2" DIA PIPE	SAE 2X2X0.375	
12-14	PX 2-1/2" DIA PIPE	MOD 2L2x2x1/8_Specia	
15	PST 2-1/2" DIA PIPE	SAE 1.75X1.75X0.25	
16	PST 2-1/2" DIA PIPE	SAE 1.75X1.75X0.125	
17	PST 2" DIA PIPE	SAE 1.5X1.5X0.125	SAE 2x2x0.125

Discrete Appurtenances

Attach Elev (ft)	Force Elev (ft)	Qty	Description
150.00	157.00	1	Phillips Dodge 201-7 Omni
149.00	149.00	3	7770
149.00	149.00	3	HPA-65R-BU6AA
149.00	149.00	3	800-10965
149.00	149.00	3	OPA65R-BU6DA
149.00	149.00	6	LGP21401
149.00	149.00	6	LGP21901
149.00	149.00	6	7020.00 RET
149.00	149.00	3	7070
149.00	149.00	3	4449 B5/B12
149.00	149.00	3	4415 B30
149.00	149.00	3	RRUS 8843 B2 B66A
149.00	149.00	3	RRUS-4478 B14
149.00	149.00	2	DC6-48-60-18-8F ("Squid")
149.00	149.00	1	DC6-48-60-18-8C-EV
149.00	149.00	1	(3) SFS-H (V-Braces)
149.00	149.00	1	(3) 12.5' - 2" Horizontal Pipe
149.00	149.00	3	Sector Frames
139.00	139.00	1	(3) Sector Frames
139.00	139.00	3	APXVAALL24_43-U-NA20
139.00	139.00	3	VV-65A-R1
139.00	139.00	3	AIR6449 B41
139.00	139.00	4	ACU-A20-N
139.00	139.00	3	4460 Radio
139.00	139.00	3	800 MHz RRH
139.00	139.00	3	4480 Radio
139.00	139.00	3	ALU 800MHz External Notch Filt
128.00	128.00	1	(3) VFA12-HD
128.00	128.00	6	NHH-65B-R2B
128.00	128.00	3	MT6407-77A
128.00	128.00	2	LNx-6513DS-A1M_0
128.00	128.00	1	LNx-6514DS-A1M
128.00	128.00	3	RF4440d-13A
128.00	128.00	3	RF4439d-25A
128.00	128.00	1	FE-16148-OVP-B12

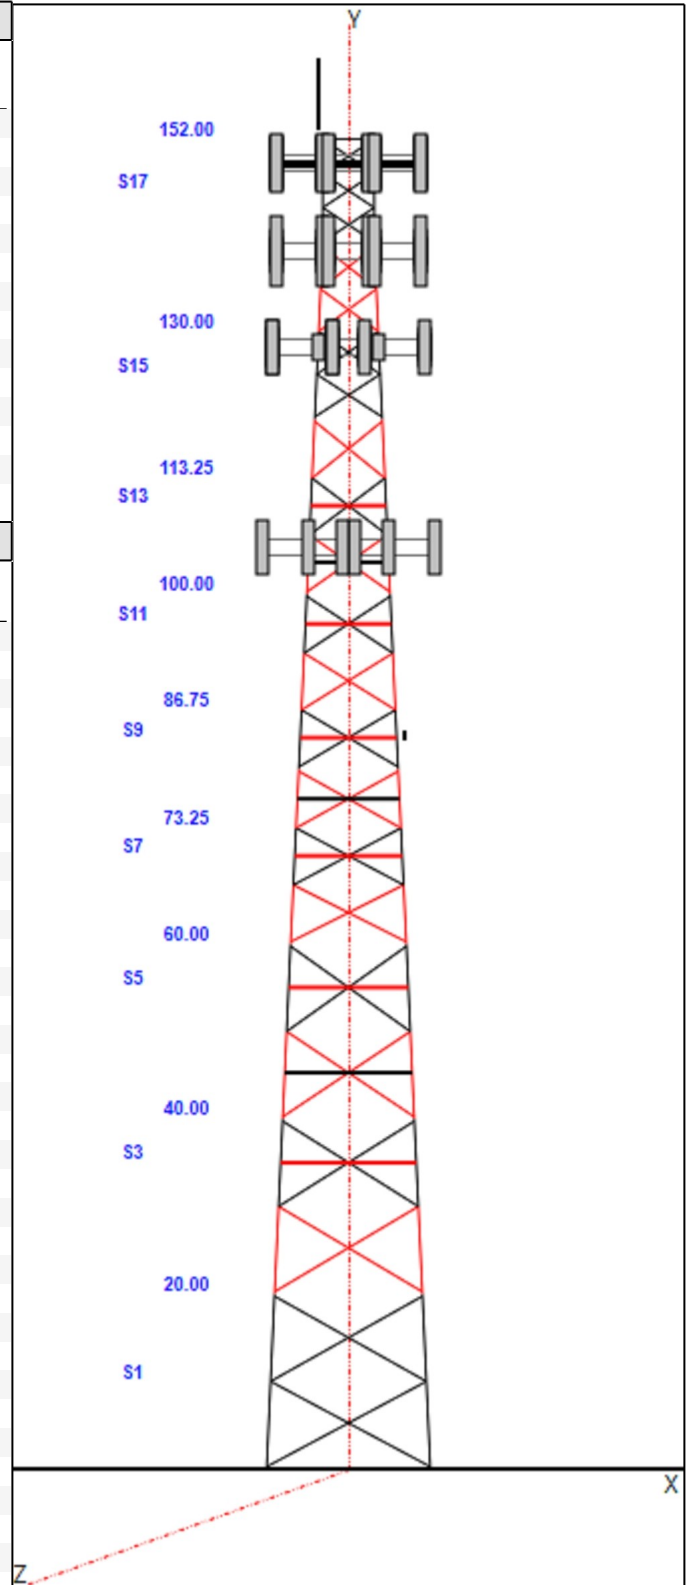

Structure: CT13065-A-SBA

Site Name: Guilford	Code: TIA-222-G	4/26/2022
Type: Self Support	Base Shape: Triangle	Basic WS: 101.00
Height: 152.00 (ft)	Base Width: 20.78	Basic Ice WS: 50.00
Base Elev: 0.00 (ft)	Top Width: 6.52	Operational WS: 60.00



Page: 2

105.00	105.00	3	MX08FRO665-21
105.00	105.00	3	TA08025-B604
105.00	105.00	3	TA08025-B605
105.00	105.00	1	RDIDC-9181-PF-48
105.00	105.00	1	(3) MTC3975083
83.50	83.50	1	DB26 GPS
83.50	83.50	1	Pipe Mount

Linear Appurtenances

Elev From (ft)	Elev To (ft)	Qty	Description
0.00	152.00	1	Climbing Ladder
8.00	150.00	1	7/8" Coax
0.00	149.00	1	W/G Ladder
10.00	149.00	12	1 5/8" Coax
10.00	149.00	1	1/2" Fiber
10.00	149.00	1	1/2" Fiber
10.00	149.00	1	3" Innerduct
10.00	149.00	2	3/4" DC
10.00	149.00	2	3/4" DC
0.00	140.00	1	W/G Ladder
8.00	139.00	3	1.9" Fiber
8.00	128.00	12	1 5/8" Coax
8.00	128.00	1	1 5/8" Hybrid
0.00	120.00	1	Empty W/G Ladder
0.00	105.00	1	1.6" Hybrid
8.00	83.50	1	1/2" Coax

Base Reactions

Leg	Overturing
Max Uplift: -195.50 (kips)	Moment: 3843.33 (ft-kips)
Max Down: 227.27 (kips)	Total Down: 41.14 (kips)
Max Shear: 23.94 (kips)	Total Shear: 40.56 (kips)


Structure: CT13065-A-SBA

Site Name: Guilford
Type: Self Support
Height: 152.00 (ft)
Base Elev: 0.00 (ft)

Base Shape: Triangle
Base Width: 20.78
Top Width: 6.52

Code: TIA-222-G
Basic WS: 101.00
Basic Ice WS: 50.00
Operational WS: 60.00

4/26/2022
Page: 3

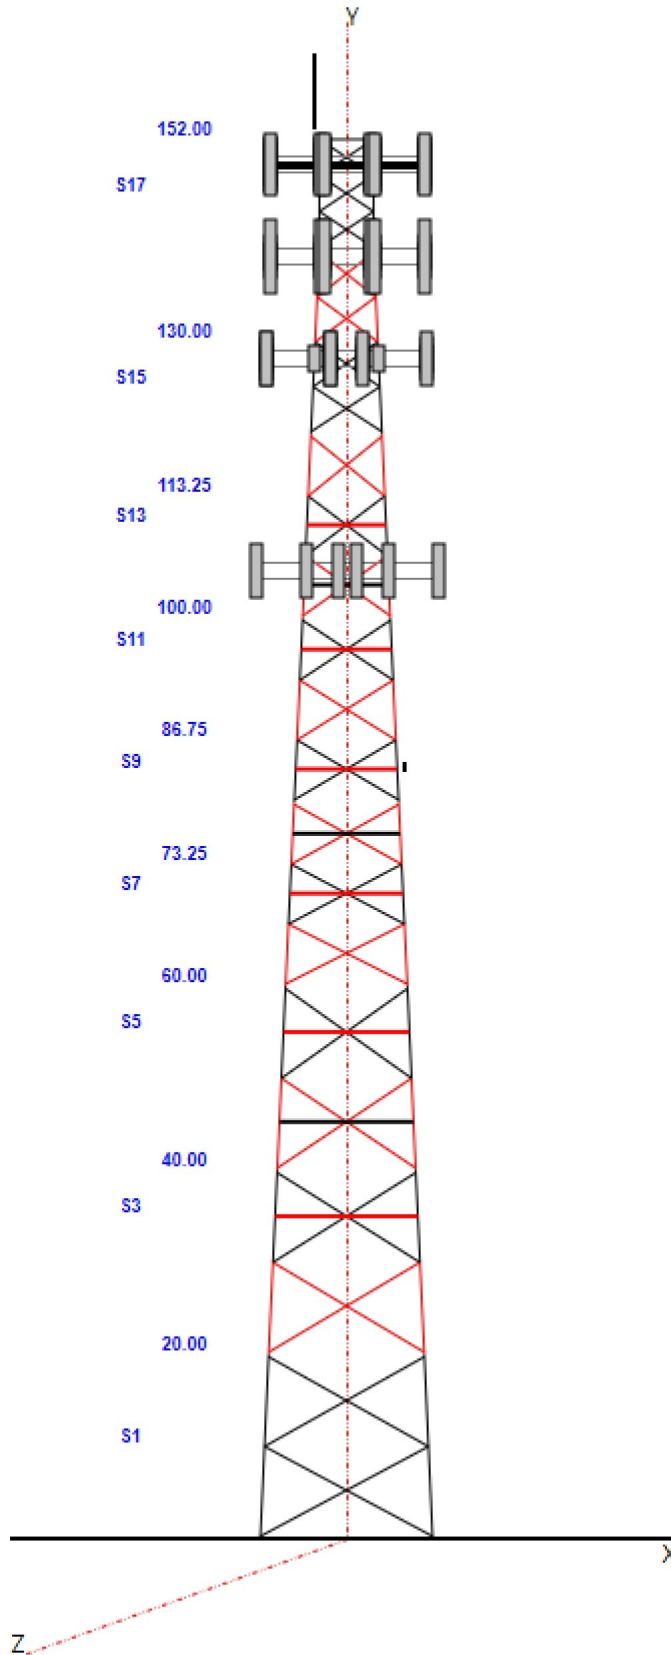


Structure: CT13065-A-SBA - Coax Line Placement

Type: Self Support
Site Name: Guilford
Height: 152.00 (ft)

4/26/2022



Page: 4

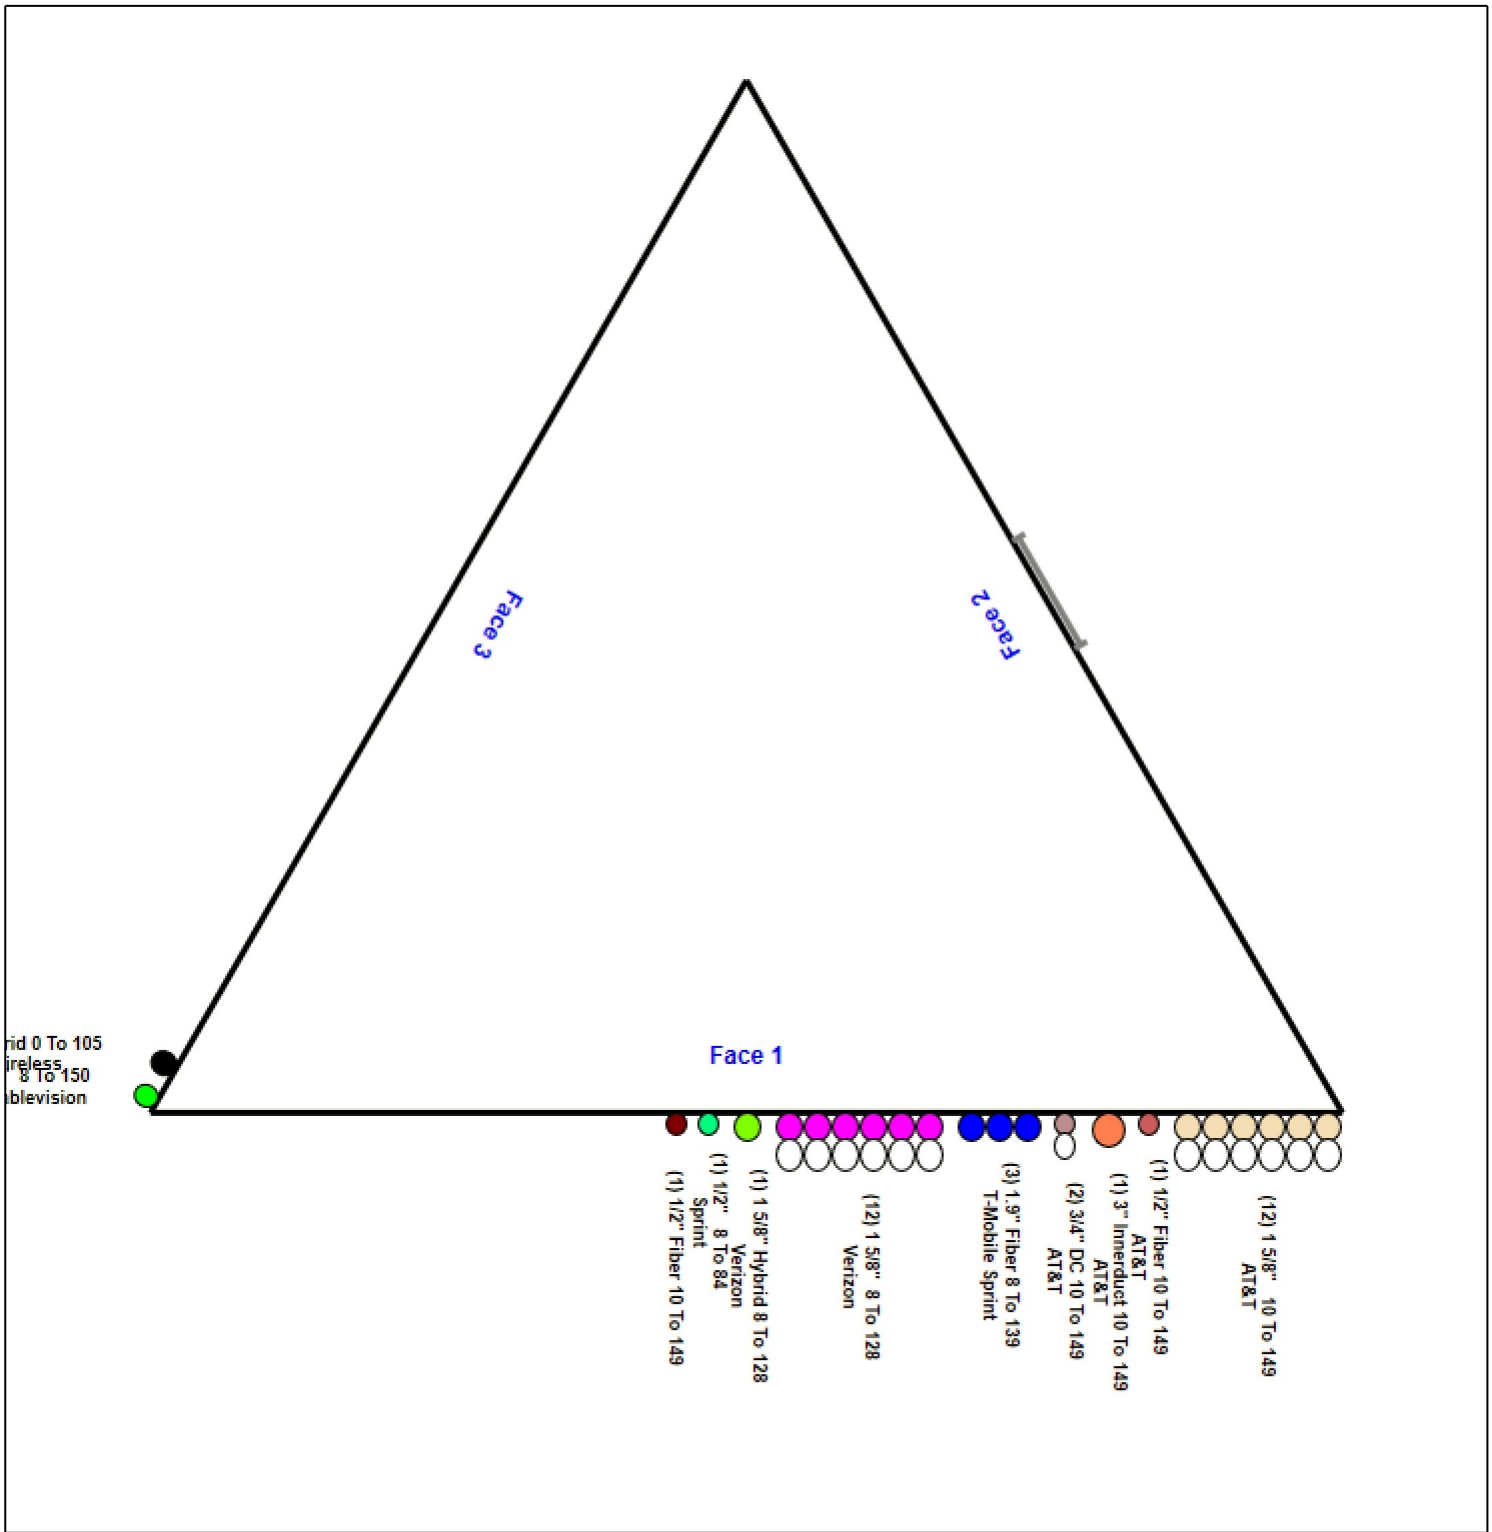

Loading Summary

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II



Page: 5

Discrete Appurtenances Properties

Attach Elev (ft)	Description	Qty	No Ice		Ice		Len (in)	Width (in)	Depth (in)	Ka	Orientation Factor	Vert Ecc (ft)
			Weight (lb)	CaAa (sf)	Weight (lb)	CaAa (sf)						
150.00	Phillips Dodge 201-7 Omni	1	4.00	1.070	74.90	3.845	99.600	1.300	1.300	1.00	1.00	7.000
149.00	7770	3	35.00	5.500	169.73	6.562	55.000	11.000	5.000	0.80	0.73	0.000
149.00	HPA-65R-BU6AA	3	51.00	9.660	298.33	11.022	72.000	14.800	9.000	0.80	0.85	0.000
149.00	800-10965	3	108.60	13.810	405.83	15.386	78.700	20.000	6.900	0.80	0.71	0.000
149.00	OPA65R-BU6DA	3	79.40	12.710	373.15	14.170	71.200	20.700	7.700	0.80	0.72	0.000
149.00	LGP21401	6	14.10	1.290	39.03	2.123	14.400	9.200	2.600	0.80	0.50	0.000
149.00	LGP21901	6	5.50	0.230	13.17	0.597	4.000	6.000	3.000	0.80	0.50	0.000
149.00	7020.00 RET	6	2.20	0.400	12.41	0.883	4.900	8.300	2.400	0.80	0.50	0.000
149.00	7070	3	5.50	0.150	10.69	0.538	8.300	1.800	0.000	0.80	0.50	0.000
149.00	4449 B5/B12	3	71.00	1.970	124.24	2.516	17.900	13.200	9.400	0.80	0.50	0.000
149.00	4415 B30	3	44.10	1.860	91.41	2.431	13.500	16.500	4.800	0.80	0.50	0.000
149.00	RRUS 8843 B2 B66A	3	72.00	1.640	118.72	2.135	14.900	13.200	10.900	0.80	0.50	0.000
149.00	RRUS-4478 B14	3	59.90	1.840	106.77	2.365	16.500	13.400	7.700	0.80	0.50	0.000
149.00	DC6-48-60-18-8F ("Squid")	2	31.80	0.920	93.46	1.357	24.000	11.000	11.000	0.80	1.00	0.000
149.00	DC6-48-60-18-8C-EV	1	16.00	4.780	139.40	5.662	31.400	18.300	10.200	0.80	1.00	0.000
149.00	(3) SFS-H (V-Braces)	1	197.00	6.300	471.30	12.879	0.000	0.000	0.000	0.75	1.00	0.000
149.00	(3) 12.5' - 2" Horizontal Pipe	1	137.25	5.938	271.03	13.378	0.000	0.000	0.000	0.75	1.00	0.000
149.00	Sector Frames	3	350.00	14.000	622.91	21.018	0.000	0.000	0.000	0.75	0.75	0.000
139.00	(3) Sector Frames	1	1470.0	52.000	3500.86	105.88	0.000	0.000	0.000	0.75	1.00	0.000
139.00	APXVAALL24_43-U-NA20	3	122.80	20.240	545.47	22.119	95.900	24.000	8.500	0.80	0.73	0.000
139.00	VV-65A-R1	3	52.90	6.690	232.39	7.795	55.100	13.800	8.200	0.80	0.83	0.000
139.00	AIR6449 B41	3	103.00	5.650	238.68	6.591	33.100	20.500	8.300	0.80	0.71	0.000
139.00	ACU-A20-N	4	1.00	0.140	5.25	0.434	4.000	2.000	3.500	0.80	0.50	0.000
139.00	4460 Radio	3	109.00	2.850	180.15	3.517	21.800	15.700	7.500	0.80	0.50	0.000
139.00	800 MHz RRH	3	53.00	2.490	126.19	3.622	19.700	13.000	10.800	0.80	0.50	0.000
139.00	4480 Radio	3	93.00	2.850	164.18	3.517	21.800	15.700	7.500	0.80	0.50	0.000
139.00	ALU 800MHz External Notch Filt	3	8.80	0.780	26.26	1.420	10.000	8.000	3.000	0.80	0.50	0.000
128.00	(3) VFA12-HD	1	2322.0	50.700	4550.34	113.25	0.000	0.000	0.000	0.75	1.00	0.000
128.00	NHH-65B-R2B	6	43.70	8.080	240.98	9.347	72.000	11.900	7.100	0.80	0.83	0.000
128.00	MT6407-77A	3	79.40	4.690	196.34	5.619	35.100	16.100	5.500	0.80	0.70	0.000
128.00	LNx-6513DS-A1M_0	2	30.40	5.830	163.52	7.904	54.700	11.900	7.100	0.80	0.83	0.000
128.00	LNx-6514DS-A1M	1	33.10	8.090	204.65	10.835	72.000	11.900	7.100	0.80	0.80	0.000
128.00	RF4440d-13A	3	70.30	1.870	138.09	2.432	15.000	15.000	8.100	0.80	0.50	0.000
128.00	RF4439d-25A	3	84.40	1.870	159.25	2.432	15.000	15.000	10.000	0.80	0.50	0.000
128.00	FE-16148-OVP-B12	1	21.90	2.010	74.19	2.568	16.600	14.600	8.500	0.80	0.79	0.000
105.00	MX08FRO665-21	3	64.50	12.490	344.74	13.901	72.000	20.000	8.000	0.80	0.74	0.000
105.00	TA08025-B604	3	63.90	1.960	112.68	2.501	15.800	15.000	7.900	0.80	0.50	0.000
105.00	TA08025-B605	3	75.00	1.960	125.39	2.501	15.800	15.000	9.100	0.80	0.50	0.000
105.00	RDIDC-9181-PF-48	1	21.90	2.010	73.20	2.558	16.600	14.600	8.500	0.80	0.79	0.000
105.00	(3) MTC3975083	1	1242.0	28.050	2411.48	62.008	0.000	0.000	0.000	0.75	1.00	0.000
83.50	DB26 GPS	1	10.00	0.900	37.65	1.504	12.000	9.000	6.000	1.00	1.00	0.000
83.50	Pipe Mount	1	45.00	1.500	80.55	2.487	0.000	0.000	0.000	1.00	1.00	0.000
Totals:		113	11,611.05		28,992.75					Number of Appurtenances :	42	

Loading Summary

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II



Page: 6

Linear Appurtenances Properties

Elev. From (ft)	Elev. To (ft)	Description	Qty	Width (in)	Weight (lb/ft)	Pct In Block	Spread On Faces	Bundling Arrangement	Cluster Dia (in)	Out of Zone	Spacing (in)	Orientation Factor	Ka Override
0.00	152.00	Climbing Ladder	1	2.00	6.90	100.00	2	Individual NR		N	1.00	1.00	
8.00	150.00	7/8" Coax	1	1.11	0.52	100.00	3	Individual NR		N	1.00	1.00	
0.00	149.00	W/G Ladder	1	0.50	6.00	100.00	1	Individual NR		N	1.00	1.00	
10.00	149.00	1 5/8" Coax	12	1.98	1.04	50.00	1	Block		N	0.50	1.00	
10.00	149.00	1/2" Fiber	1	0.50	0.16	100.00	1	Individual NR		N	1.00	1.00	0
10.00	149.00	1/2" Fiber	1	0.50	0.16	100.00	1	Individual NR		N	1.00	1.00	
10.00	149.00	3" Innerduct	1	3.00	0.25	100.00	1	Individual NR		N	1.00	1.00	
10.00	149.00	3/4" DC	2	0.75	0.40	100.00	1	Individual IR		N	1.00	1.00	0
10.00	149.00	3/4" DC	2	0.75	0.40	50.00	1	Block		N	1.00	1.00	
0.00	140.00	W/G Ladder	1	2.00	6.00	100.00	1	Individual NR		N	1.00	1.00	
8.00	139.00	1.9" Fiber	3	1.90	0.50	100.00	1	Individual IR		N	1.00	1.00	
8.00	128.00	1 5/8" Coax	12	1.98	1.04	50.00	1	Block		N	0.50	1.00	
8.00	128.00	1 5/8" Hybrid	1	2.00	1.10	100.00	1	Individual NR		N	1.00	1.00	
0.00	120.00	Empty W/G Ladder	1	2.00	6.00	100.00	3	Individual NR		N	1.00	1.00	
0.00	105.00	1.6" Hybrid	1	1.60	1.82	100.00	3	Individual NR		N	1.00	1.00	
8.00	83.50	1/2" Coax	1	0.65	0.16	100.00	1	Individual NR		N	1.00	1.00	

Section Forces

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II




Page: 7

Load Case: 1.2D + 1.6W Normal Wind	1.2D + 1.6W 101 mph Wind at Normal To Face
Wind Load Factor: 1.60	Wind Importance Factor: 1.00
Dead Load Factor: 1.20	
Ice Dead Load Factor: 0.00	Ice Importance Factor: 1.00

Sect Seq	Wind Height (ft)	Total Flat Area (psf) (sqft)	Total Round Area (sqft)	Ice Round Area (sqft)	Sol Ratio	Cf	Df	Dr	Ice Thick (in)	Eff Area (sqft)	Ice		Total Weight (lb)	Weight Ice (lb)	Struct Force (lb)	Linear Force (lb)	Total Force (lb)	
											Linear Area (sqft)	Linear Area (sqft)						
1	10.0	15.54	25.144	20.02	0.00	0.11	2.92	1.00	1.00	0.00	35.40	54.53	0.00	4,926.7	0.0	2183.16	1017.30	3,200.47
2	25.0	15.54	10.139	8.14	0.00	0.10	2.97	1.00	1.00	0.00	14.63	43.81	0.00	2,650.9	0.0	918.98	790.09	1,709.07
3	35.0	16.25	14.008	7.51	0.00	0.12	2.88	1.00	1.00	0.00	18.24	43.81	0.00	2,459.3	0.0	1159.37	826.36	1,985.74
4	45.0	17.46	12.630	7.51	0.00	0.12	2.88	1.00	1.00	0.00	16.82	43.81	0.00	2,048.4	0.0	1149.73	887.88	2,037.61
5	55.0	18.49	12.013	7.51	0.00	0.13	2.86	1.00	1.00	0.00	16.17	43.81	0.00	2,008.4	0.0	1164.38	940.28	2,104.66
6	63.4	19.26	6.401	5.07	0.00	0.12	2.90	1.00	1.00	0.00	9.18	29.57	0.00	1,344.3	0.0	697.95	660.92	1,358.86
7	70.0	19.81	9.004	3.80	0.00	0.14	2.80	1.00	1.00	0.00	11.16	28.48	0.00	1,268.2	0.0	842.81	654.78	1,497.59
8	76.6	20.33	8.624	3.94	0.00	0.14	2.81	1.00	1.00	0.00	10.86	29.57	0.00	1,160.9	0.0	842.68	697.76	1,540.43
9	83.4	20.83	6.574	3.58	0.00	0.12	2.88	1.00	1.00	0.00	8.60	29.39	0.00	1,368.1	0.0	702.29	711.20	1,413.49
10	90.0	21.29	4.328	4.34	0.00	0.11	2.92	1.00	1.00	0.00	6.76	28.12	0.00	1,205.4	0.0	570.60	696.18	1,266.79
11	96.6	21.72	6.414	3.24	0.00	0.13	2.85	1.00	1.00	0.00	8.25	29.20	0.00	1,259.0	0.0	695.04	737.78	1,432.82
12	103.4	22.15	2.125	10.79	0.00	0.18	2.65	1.00	1.00	0.00	8.38	28.97	0.00	1,032.4	0.0	669.68	747.09	1,416.77
13	110.0	22.54	1.592	10.32	0.00	0.19	2.64	1.00	1.00	0.00	7.58	27.26	0.00	982.5	0.0	613.10	718.13	1,331.24
14	116.6	22.92	0.000	10.11	0.00	0.16	2.72	1.00	1.00	0.00	5.82	28.30	0.00	882.9	0.0	493.46	758.32	1,251.78
15	125.0	23.38	5.351	4.80	0.00	0.12	2.88	1.00	1.00	0.00	8.06	37.54	0.00	1,118.7	0.0	737.52	1006.11	1,743.63
16	135.0	23.90	4.874	4.80	0.00	0.13	2.84	1.00	1.00	0.00	7.59	26.14	0.00	789.2	0.0	699.93	705.71	1,405.64
17	146.0	24.44	6.624	4.75	0.00	0.14	2.81	1.00	1.00	0.00	9.32	18.77	0.00	700.2	0.0	868.92	519.76	1,388.69
														27,205.4	0.0			28,085.28

Section Forces

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II

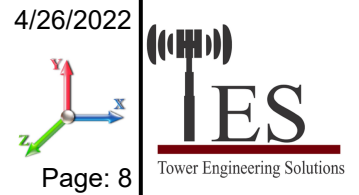

Load Case: 1.2D + 1.6W 60° Wind	1.2D + 1.6W 101 mph Wind at 60° From Face
Wind Load Factor: 1.60	Wind Importance Factor: 1.00
Dead Load Factor: 1.20	
Ice Dead Load Factor: 0.00	Ice Importance Factor: 1.00


Sect Seq	Wind Height (ft)	Total		Ice		Sol Ratio	Cf	Df	Dr	Ice Thick (in)	Eff Area (sqft)	Ice		Total Weight (lb)	Weight Ice (lb)	Struct Force (lb)	Linear Force (lb)	Total Force (lb)		
		Flat Area (sqft)	Round Area (sqft)	Round Area (sqft)	Linear Area (sqft)							Linear Area (sqft)								
1	10.0	15.54	25.144	20.02	0.00	0.11	2.92	0.80	1.00	0.00	30.37	54.53	0.00	4,926.7	0.0	1872.99	1017.30	2,890.29		
2	25.0	15.54	10.139	8.14	0.00	0.10	2.97	0.80	1.00	0.00	12.60	43.81	0.00	2,650.9	0.0	791.62	790.09	1,581.71		
3	35.0	16.25	14.008	7.51	0.00	0.12	2.88	0.80	1.00	0.00	15.44	43.81	0.00	2,459.3	0.0	981.30	826.36	1,807.66		
4	45.0	17.46	12.630	7.51	0.00	0.12	2.88	0.80	1.00	0.00	14.29	43.81	0.00	2,048.4	0.0	977.03	887.88	1,864.91		
5	55.0	18.49	12.013	7.51	0.00	0.13	2.86	0.80	1.00	0.00	13.76	43.81	0.00	2,008.4	0.0	991.33	940.28	1,931.60		
6	63.4	19.26	6.401	5.07	0.00	0.12	2.90	0.80	1.00	0.00	7.90	29.57	0.00	1,344.3	0.0	600.63	660.92	1,261.55		
7	70.0	19.81	9.004	3.80	0.00	0.14	2.80	0.80	1.00	0.00	9.36	28.48	0.00	1,268.2	0.0	706.77	654.78	1,361.55		
8	76.6	20.33	8.624	3.94	0.00	0.14	2.81	0.80	1.00	0.00	9.13	29.57	0.00	1,160.9	0.0	708.83	697.76	1,406.59		
9	83.4	20.83	6.574	3.58	0.00	0.12	2.88	0.80	1.00	0.00	7.28	29.39	0.00	1,368.1	0.0	594.88	711.20	1,306.08		
10	90.0	21.29	4.328	4.34	0.00	0.11	2.92	0.80	1.00	0.00	5.89	28.12	0.00	1,205.4	0.0	497.52	696.18	1,193.70		
11	96.6	21.72	6.414	3.24	0.00	0.13	2.85	0.80	1.00	0.00	6.96	29.20	0.00	1,259.0	0.0	586.93	737.78	1,324.71		
12	103.4	22.15	2.125	10.79	0.00	0.18	2.65	0.80	1.00	0.00	7.95	28.97	0.00	1,032.4	0.0	635.69	747.09	1,382.79		
13	110.0	22.54	1.592	10.32	0.00	0.19	2.64	0.80	1.00	0.00	7.26	27.26	0.00	982.5	0.0	587.34	718.13	1,305.47		
14	116.6	22.92	0.000	10.11	0.00	0.16	2.72	0.80	1.00	0.00	5.82	28.30	0.00	882.9	0.0	493.46	758.32	1,251.78		
15	125.0	23.38	5.351	4.80	0.00	0.12	2.88	0.80	1.00	0.00	6.99	37.54	0.00	1,118.7	0.0	639.65	1006.11	1,645.75		
16	135.0	23.90	4.874	4.80	0.00	0.13	2.84	0.80	1.00	0.00	6.62	26.14	0.00	789.2	0.0	610.04	705.71	1,315.76		
17	146.0	24.44	6.624	4.75	0.00	0.14	2.81	0.80	1.00	0.00	7.99	18.77	0.00	700.2	0.0	745.35	519.76	1,265.11		
															27,205.4		0.0		26,097.01	

Section Forces

Structure: CT13065-A-SBA
Site Name: Guilford
Height: 152.00 (ft)
Base Elev: 0.000 (ft)
Gh: 0.85

Topography: 1

Code: TIA-222-G
Exposure: B
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II

4/26/2022

 Page: 9



Load Case: 1.2D + 1.6W 90° Wind

1.2D + 1.6W 101 mph Wind at 90° From Face

Wind Load Factor: 1.60

Wind Importance Factor: 1.00

Dead Load Factor: 1.20

Ice Dead Load Factor: 0.00

Ice Importance Factor: 1.00

Sect Seq	Wind Height (ft)	Total		Ice Round Area (sqft)	Sol Ratio	Cf	Df	Dr	Ice Thick (in)	Eff Area (sqft)	Ice		Total Weight (lb)	Weight Ice (lb)	Struct Force (lb)	Linear Force (lb)	Total Force (lb)	
		Flat Area (sqft)	Round Area (sqft)								Linear Area (sqft)	Total Area (sqft)						
1	10.0	15.54	25.144	20.02	0.00	0.11	2.92	0.85	1.00	0.00	31.62	54.53	0.00	4,926.7	0.0	1950.53	1017.30	2,967.84
2	25.0	15.54	10.139	8.14	0.00	0.10	2.97	0.85	1.00	0.00	13.11	43.81	0.00	2,650.9	0.0	823.46	790.09	1,613.55
3	35.0	16.25	14.008	7.51	0.00	0.12	2.88	0.85	1.00	0.00	16.14	43.81	0.00	2,459.3	0.0	1025.82	826.36	1,852.18
4	45.0	17.46	12.630	7.51	0.00	0.12	2.88	0.85	1.00	0.00	14.92	43.81	0.00	2,048.4	0.0	1020.21	887.88	1,908.09
5	55.0	18.49	12.013	7.51	0.00	0.13	2.86	0.85	1.00	0.00	14.36	43.81	0.00	2,008.4	0.0	1034.59	940.28	1,974.87
6	63.4	19.26	6.401	5.07	0.00	0.12	2.90	0.85	1.00	0.00	8.22	29.57	0.00	1,344.3	0.0	624.96	660.92	1,285.87
7	70.0	19.81	9.004	3.80	0.00	0.14	2.80	0.85	1.00	0.00	9.81	28.48	0.00	1,268.2	0.0	740.78	654.78	1,395.56
8	76.6	20.33	8.624	3.94	0.00	0.14	2.81	0.85	1.00	0.00	9.57	29.57	0.00	1,160.9	0.0	742.29	697.76	1,440.05
9	83.4	20.83	6.574	3.58	0.00	0.12	2.88	0.85	1.00	0.00	7.61	29.39	0.00	1,368.1	0.0	621.73	711.20	1,332.93
10	90.0	21.29	4.328	4.34	0.00	0.11	2.92	0.85	1.00	0.00	6.11	28.12	0.00	1,205.4	0.0	515.79	696.18	1,211.97
11	96.6	21.72	6.414	3.24	0.00	0.13	2.85	0.85	1.00	0.00	7.28	29.20	0.00	1,259.0	0.0	613.96	737.78	1,351.74
12	103.4	22.15	2.125	10.79	0.00	0.18	2.65	0.85	1.00	0.00	8.06	28.97	0.00	1,032.4	0.0	644.19	747.09	1,391.28
13	110.0	22.54	1.592	10.32	0.00	0.19	2.64	0.85	1.00	0.00	7.34	27.26	0.00	982.5	0.0	593.78	718.13	1,311.91
14	116.6	22.92	0.000	10.11	0.00	0.16	2.72	0.85	1.00	0.00	5.82	28.30	0.00	882.9	0.0	493.46	758.32	1,251.78
15	125.0	23.38	5.351	4.80	0.00	0.12	2.88	0.85	1.00	0.00	7.26	37.54	0.00	1,118.7	0.0	664.12	1006.11	1,670.22
16	135.0	23.90	4.874	4.80	0.00	0.13	2.84	0.85	1.00	0.00	6.86	26.14	0.00	789.2	0.0	632.51	705.71	1,338.23
17	146.0	24.44	6.624	4.75	0.00	0.14	2.81	0.85	1.00	0.00	8.32	18.77	0.00	700.2	0.0	776.25	519.76	1,296.01
27,205.4														0.0	26,594.08			

Section Forces

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II
		Page: 10




Load Case: 0.9D + 1.6W Normal Wind	0.9D + 1.6W 101 mph Wind at Normal To Face
Wind Load Factor: 1.60	Wind Importance Factor: 1.00
Dead Load Factor: 0.90	
Ice Dead Load Factor: 0.00	Ice Importance Factor: 1.00

Sect Seq	Wind Height (ft)	Total		Ice		Sol Ratio	Cf	Df	Dr	Ice Thick (in)	Eff Area (sqft)	Ice		Total Weight (lb)	Weight Ice (lb)	Struct Force (lb)	Linear Force (lb)	Total Force (lb)
		Flat Area (sqft)	Round Area (sqft)	Round Area (sqft)	Linear Area (sqft)							Linear Area (sqft)						
1	10.0	15.54	25.144	20.02	0.00	0.11	2.92	1.00	1.00	0.00	35.40	54.53	0.00	3,695.0	0.0	2183.16	1017.30	3,200.47
2	25.0	15.54	10.139	8.14	0.00	0.10	2.97	1.00	1.00	0.00	14.63	43.81	0.00	1,988.2	0.0	918.98	790.09	1,709.07
3	35.0	16.25	14.008	7.51	0.00	0.12	2.88	1.00	1.00	0.00	18.24	43.81	0.00	1,844.5	0.0	1159.37	826.36	1,985.74
4	45.0	17.46	12.630	7.51	0.00	0.12	2.88	1.00	1.00	0.00	16.82	43.81	0.00	1,536.3	0.0	1149.73	887.88	2,037.61
5	55.0	18.49	12.013	7.51	0.00	0.13	2.86	1.00	1.00	0.00	16.17	43.81	0.00	1,506.3	0.0	1164.38	940.28	2,104.66
6	63.4	19.26	6.401	5.07	0.00	0.12	2.90	1.00	1.00	0.00	9.18	29.57	0.00	1,008.2	0.0	697.95	660.92	1,358.86
7	70.0	19.81	9.004	3.80	0.00	0.14	2.80	1.00	1.00	0.00	11.16	28.48	0.00	951.2	0.0	842.81	654.78	1,497.59
8	76.6	20.33	8.624	3.94	0.00	0.14	2.81	1.00	1.00	0.00	10.86	29.57	0.00	870.6	0.0	842.68	697.76	1,540.43
9	83.4	20.83	6.574	3.58	0.00	0.12	2.88	1.00	1.00	0.00	8.60	29.39	0.00	1,026.1	0.0	702.29	711.20	1,413.49
10	90.0	21.29	4.328	4.34	0.00	0.11	2.92	1.00	1.00	0.00	6.76	28.12	0.00	904.1	0.0	570.60	696.18	1,266.79
11	96.6	21.72	6.414	3.24	0.00	0.13	2.85	1.00	1.00	0.00	8.25	29.20	0.00	944.2	0.0	695.04	737.78	1,432.82
12	103.4	22.15	2.125	10.79	0.00	0.18	2.65	1.00	1.00	0.00	8.38	28.97	0.00	774.3	0.0	669.68	747.09	1,416.77
13	110.0	22.54	1.592	10.32	0.00	0.19	2.64	1.00	1.00	0.00	7.58	27.26	0.00	736.8	0.0	613.10	718.13	1,331.24
14	116.6	22.92	0.000	10.11	0.00	0.16	2.72	1.00	1.00	0.00	5.82	28.30	0.00	662.2	0.0	493.46	758.32	1,251.78
15	125.0	23.38	5.351	4.80	0.00	0.12	2.88	1.00	1.00	0.00	8.06	37.54	0.00	839.0	0.0	737.52	1006.11	1,743.63
16	135.0	23.90	4.874	4.80	0.00	0.13	2.84	1.00	1.00	0.00	7.59	26.14	0.00	591.9	0.0	699.93	705.71	1,405.64
17	146.0	24.44	6.624	4.75	0.00	0.14	2.81	1.00	1.00	0.00	9.32	18.77	0.00	525.2	0.0	868.92	519.76	1,388.69
														20,404.0	0.0			28,085.28

Section Forces

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II



Page: 11

Load Case: 0.9D + 1.6W 60° Wind	0.9D + 1.6W 101 mph Wind at 60° From Face
Wind Load Factor: 1.60	Wind Importance Factor: 1.00
Dead Load Factor: 0.90	
Ice Dead Load Factor: 0.00	Ice Importance Factor: 1.00

Sect Seq	Wind Height (ft)	Total		Ice Round Area (sqft)	Sol Ratio	Cf	Df	Dr	Ice Thick (in)	Eff Area (sqft)	Ice		Total Weight (lb)	Weight Ice (lb)	Struct Force (lb)	Linear Force (lb)	Total Force (lb)	
		Flat Area (sqft)	Round Area (sqft)								Linear Area (sqft)	Linear Area (sqft)						
1	10.0	15.54	25.144	20.02	0.00	0.11	2.92	0.80	1.00	0.00	30.37	54.53	0.00	3,695.0	0.0	1872.99	1017.30	2,890.29
2	25.0	15.54	10.139	8.14	0.00	0.10	2.97	0.80	1.00	0.00	12.60	43.81	0.00	1,988.2	0.0	791.62	790.09	1,581.71
3	35.0	16.25	14.008	7.51	0.00	0.12	2.88	0.80	1.00	0.00	15.44	43.81	0.00	1,844.5	0.0	981.30	826.36	1,807.66
4	45.0	17.46	12.630	7.51	0.00	0.12	2.88	0.80	1.00	0.00	14.29	43.81	0.00	1,536.3	0.0	977.03	887.88	1,864.91
5	55.0	18.49	12.013	7.51	0.00	0.13	2.86	0.80	1.00	0.00	13.76	43.81	0.00	1,506.3	0.0	991.33	940.28	1,931.60
6	63.4	19.26	6.401	5.07	0.00	0.12	2.90	0.80	1.00	0.00	7.90	29.57	0.00	1,008.2	0.0	600.63	660.92	1,261.55
7	70.0	19.81	9.004	3.80	0.00	0.14	2.80	0.80	1.00	0.00	9.36	28.48	0.00	951.2	0.0	706.77	654.78	1,361.55
8	76.6	20.33	8.624	3.94	0.00	0.14	2.81	0.80	1.00	0.00	9.13	29.57	0.00	870.6	0.0	708.83	697.76	1,406.59
9	83.4	20.83	6.574	3.58	0.00	0.12	2.88	0.80	1.00	0.00	7.28	29.39	0.00	1,026.1	0.0	594.88	711.20	1,306.08
10	90.0	21.29	4.328	4.34	0.00	0.11	2.92	0.80	1.00	0.00	5.89	28.12	0.00	904.1	0.0	497.52	696.18	1,193.70
11	96.6	21.72	6.414	3.24	0.00	0.13	2.85	0.80	1.00	0.00	6.96	29.20	0.00	944.2	0.0	586.93	737.78	1,324.71
12	103.4	22.15	2.125	10.79	0.00	0.18	2.65	0.80	1.00	0.00	7.95	28.97	0.00	774.3	0.0	635.69	747.09	1,382.79
13	110.0	22.54	1.592	10.32	0.00	0.19	2.64	0.80	1.00	0.00	7.26	27.26	0.00	736.8	0.0	587.34	718.13	1,305.47
14	116.6	22.92	0.000	10.11	0.00	0.16	2.72	0.80	1.00	0.00	5.82	28.30	0.00	662.2	0.0	493.46	758.32	1,251.78
15	125.0	23.38	5.351	4.80	0.00	0.12	2.88	0.80	1.00	0.00	6.99	37.54	0.00	839.0	0.0	639.65	1006.11	1,645.75
16	135.0	23.90	4.874	4.80	0.00	0.13	2.84	0.80	1.00	0.00	6.62	26.14	0.00	591.9	0.0	610.04	705.71	1,315.76
17	146.0	24.44	6.624	4.75	0.00	0.14	2.81	0.80	1.00	0.00	7.99	18.77	0.00	525.2	0.0	745.35	519.76	1,265.11
														20,404.0	0.0	26,097.01		

Section Forces

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II
		Page: 12



Load Case: 0.9D + 1.6W 90° Wind	0.9D + 1.6W 101 mph Wind at 90° From Face
Wind Load Factor: 1.60	Wind Importance Factor: 1.00
Dead Load Factor: 0.90	
Ice Dead Load Factor: 0.00	Ice Importance Factor: 1.00

Sect Seq	Wind Height (ft)	Total		Ice Round Area (sqft)	Sol Ratio	Cf	Df	Dr	Ice Thick (in)	Eff Area (sqft)	Ice		Total Weight (lb)	Weight Ice (lb)	Struct Force (lb)	Linear Force (lb)	Total Force (lb)	
		Flat Area (sqft)	Round Area (sqft)								Linear Area (sqft)	Area (sqft)						
1	10.0	15.54	25.144	20.02	0.00	0.11	2.92	0.85	1.00	0.00	31.62	54.53	0.00	3,695.0	0.0	1950.53	1017.30	2,967.84
2	25.0	15.54	10.139	8.14	0.00	0.10	2.97	0.85	1.00	0.00	13.11	43.81	0.00	1,988.2	0.0	823.46	790.09	1,613.55
3	35.0	16.25	14.008	7.51	0.00	0.12	2.88	0.85	1.00	0.00	16.14	43.81	0.00	1,844.5	0.0	1025.82	826.36	1,852.18
4	45.0	17.46	12.630	7.51	0.00	0.12	2.88	0.85	1.00	0.00	14.92	43.81	0.00	1,536.3	0.0	1020.21	887.88	1,908.09
5	55.0	18.49	12.013	7.51	0.00	0.13	2.86	0.85	1.00	0.00	14.36	43.81	0.00	1,506.3	0.0	1034.59	940.28	1,974.87
6	63.4	19.26	6.401	5.07	0.00	0.12	2.90	0.85	1.00	0.00	8.22	29.57	0.00	1,008.2	0.0	624.96	660.92	1,285.87
7	70.0	19.81	9.004	3.80	0.00	0.14	2.80	0.85	1.00	0.00	9.81	28.48	0.00	951.2	0.0	740.78	654.78	1,395.56
8	76.6	20.33	8.624	3.94	0.00	0.14	2.81	0.85	1.00	0.00	9.57	29.57	0.00	870.6	0.0	742.29	697.76	1,440.05
9	83.4	20.83	6.574	3.58	0.00	0.12	2.88	0.85	1.00	0.00	7.61	29.39	0.00	1,026.1	0.0	621.73	711.20	1,332.93
10	90.0	21.29	4.328	4.34	0.00	0.11	2.92	0.85	1.00	0.00	6.11	28.12	0.00	904.1	0.0	515.79	696.18	1,211.97
11	96.6	21.72	6.414	3.24	0.00	0.13	2.85	0.85	1.00	0.00	7.28	29.20	0.00	944.2	0.0	613.96	737.78	1,351.74
12	103.4	22.15	2.125	10.79	0.00	0.18	2.65	0.85	1.00	0.00	8.06	28.97	0.00	774.3	0.0	644.19	747.09	1,391.28
13	110.0	22.54	1.592	10.32	0.00	0.19	2.64	0.85	1.00	0.00	7.34	27.26	0.00	736.8	0.0	593.78	718.13	1,311.91
14	116.6	22.92	0.000	10.11	0.00	0.16	2.72	0.85	1.00	0.00	5.82	28.30	0.00	662.2	0.0	493.46	758.32	1,251.78
15	125.0	23.38	5.351	4.80	0.00	0.12	2.88	0.85	1.00	0.00	7.26	37.54	0.00	839.0	0.0	664.12	1006.11	1,670.22
16	135.0	23.90	4.874	4.80	0.00	0.13	2.84	0.85	1.00	0.00	6.86	26.14	0.00	591.9	0.0	632.51	705.71	1,338.23
17	146.0	24.44	6.624	4.75	0.00	0.14	2.81	0.85	1.00	0.00	8.32	18.77	0.00	525.2	0.0	776.25	519.76	1,296.01
														20,404.0	0.0			26,594.08

Section Forces

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II



Page: 13

Load Case: 1.2D + 1.0Di + 1.0Wi Normal Wind	1.2D + 1.0Di + 1.0Wi 50 mph Wind at Normal From Face
Wind Load Factor: 1.00	Wind Importance Factor: 1.00
Dead Load Factor: 1.20	
Ice Dead Load Factor: 1.00	Ice Importance Factor: 1.00

Sect Seq	Wind Height (ft)	qz (psf)	Total Area		Ice Round Area (sqft)	Sol Ratio	Cf	Df	Dr	Ice Thick (in)	Eff Area (sqft)	Ice Area		Total Weight (lb)	Weight Ice (lb)	Struct Force (lb)	Linear Force (lb)	Total Force (lb)
			Flat Area (sqft)	Round Area (sqft)								Linear Area (sqft)	Linear Area (sqft)					
1	10.0	3.81	25.144	48.47	28.46	0.18	2.67	1.00	1.00	1.33	52.83	87.09	19.08	9,633.9	4707.2	455.84	324.33	780.17
2	25.0	3.81	10.139	23.07	14.93	0.18	2.68	1.00	1.00	1.46	23.30	68.19	17.02	5,546.6	2895.7	202.09	248.16	450.26
3	35.0	3.98	14.008	22.51	15.00	0.20	2.58	1.00	1.00	1.51	26.96	68.94	17.60	5,861.3	3402.0	235.50	260.96	496.46
4	45.0	4.28	12.630	22.42	14.91	0.21	2.57	1.00	1.00	1.55	25.55	69.52	18.05	5,418.9	3370.6	238.68	283.32	522.00
5	55.0	4.53	12.013	22.29	14.78	0.22	2.54	1.00	1.00	1.58	24.89	69.99	18.42	5,392.2	3383.8	243.65	301.99	545.63
6	63.4	4.72	6.401	17.08	12.01	0.23	2.49	1.00	1.00	1.60	16.32	47.47	12.61	3,498.8	2154.5	163.17	212.52	375.69
7	70.0	4.86	9.004	15.46	11.66	0.26	2.39	1.00	1.00	1.62	18.11	45.87	12.26	3,668.8	2400.6	178.87	209.06	387.93
8	76.6	4.98	8.624	15.52	11.57	0.26	2.39	1.00	1.00	1.63	17.76	47.78	12.85	3,591.2	2430.3	180.09	223.77	403.87
9	83.4	5.10	6.574	14.89	11.32	0.25	2.44	1.00	1.00	1.65	15.28	47.74	12.07	3,591.0	2222.9	161.89	227.33	389.22
10	90.0	5.22	4.328	15.28	10.94	0.25	2.45	1.00	1.00	1.66	13.26	45.92	10.78	3,122.5	1917.1	143.76	220.18	363.94
11	96.6	5.32	6.414	14.08	10.84	0.27	2.39	1.00	1.00	1.67	14.71	47.80	11.27	3,456.6	2197.6	159.13	232.72	391.85
12	103.4	5.43	2.125	21.36	10.58	0.32	2.23	1.00	1.00	1.68	15.18	47.68	10.86	3,472.2	2439.8	156.46	230.77	387.23
13	110.0	5.52	1.592	20.52	10.19	0.34	2.20	1.00	1.00	1.69	14.23	45.38	9.16	3,266.3	2283.8	147.09	218.41	365.50
14	116.6	5.62	0.000	20.20	10.09	0.32	2.25	1.00	1.00	1.70	12.30	47.22	9.57	2,980.4	2097.5	132.20	232.54	364.74
15	125.0	5.73	5.351	21.28	16.48	0.31	2.27	1.00	1.00	1.71	18.16	62.31	13.71	3,736.0	2617.3	200.75	310.17	510.92
16	135.0	5.86	4.874	20.46	15.66	0.33	2.21	1.00	1.00	1.73	17.36	48.33	11.51	2,984.0	2194.8	190.98	243.99	434.98
17	146.0	5.99	6.624	26.87	22.12	0.40	2.07	1.00	1.00	1.74	23.69	33.45	10.73	2,915.4	2215.2	249.63	171.17	420.80
														72,136.1	44930.8			7,591.16

Section Forces

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II
		Page: 14



Load Case: 1.2D + 1.0Di + 1.0Wi 60° Wind	1.2D + 1.0Di + 1.0Wi 50 mph Wind at 60° From Face
Wind Load Factor: 1.00	Wind Importance Factor: 1.00
Dead Load Factor: 1.20	
Ice Dead Load Factor: 1.00	Ice Importance Factor: 1.00

Sect Seq	Wind Height (ft)	Total		Ice Round Area (sqft)	Sol Ratio	Cf	Df	Dr	Ice Thick (in)	Eff Area (sqft)	Ice		Total Weight (lb)	Weight Ice (lb)	Struct Force (lb)	Linear Force (lb)	Total Force (lb)	
		Flat Area (sqft)	Round Area (sqft)								Linear Area (sqft)	Linear Area (sqft)						
1	10.0	3.81	25.144	48.47	28.46	0.18	2.67	0.80	1.00	1.33	47.80	87.09	19.08	9,633.9	4707.2	412.45	324.33	736.78
2	25.0	3.81	10.139	23.07	14.93	0.18	2.68	0.80	1.00	1.46	21.28	68.19	17.02	5,546.6	2895.7	184.51	248.16	432.67
3	35.0	3.98	14.008	22.51	15.00	0.20	2.58	0.80	1.00	1.51	24.16	68.94	17.60	5,861.3	3402.0	211.03	260.96	471.99
4	45.0	4.28	12.630	22.42	14.91	0.21	2.57	0.80	1.00	1.55	23.02	69.52	18.05	5,418.9	3370.6	215.08	283.32	498.40
5	55.0	4.53	12.013	22.29	14.78	0.22	2.54	0.80	1.00	1.58	22.49	69.99	18.42	5,392.2	3383.8	220.13	301.99	522.11
6	63.4	4.72	6.401	17.08	12.01	0.23	2.49	0.80	1.00	1.60	15.04	47.47	12.61	3,498.8	2154.5	150.37	212.52	362.89
7	70.0	4.86	9.004	15.46	11.66	0.26	2.39	0.80	1.00	1.62	16.31	45.87	12.26	3,668.8	2400.6	161.08	209.06	370.14
8	76.6	4.98	8.624	15.52	11.57	0.26	2.39	0.80	1.00	1.63	16.03	47.78	12.85	3,591.2	2430.3	162.60	223.77	386.37
9	83.4	5.10	6.574	14.89	11.32	0.25	2.44	0.80	1.00	1.65	13.97	47.74	12.07	3,591.0	2222.9	147.96	227.33	375.29
10	90.0	5.22	4.328	15.28	10.94	0.25	2.45	0.80	1.00	1.66	12.39	45.92	10.78	3,122.5	1917.1	134.37	220.18	354.55
11	96.6	5.32	6.414	14.08	10.84	0.27	2.39	0.80	1.00	1.67	13.42	47.80	11.27	3,456.6	2197.6	145.25	232.72	377.97
12	103.4	5.43	2.125	21.36	10.58	0.32	2.23	0.80	1.00	1.68	14.75	47.68	10.86	3,472.2	2439.8	152.08	230.77	382.85
13	110.0	5.52	1.592	20.52	10.19	0.34	2.20	0.80	1.00	1.69	13.91	45.38	9.16	3,266.3	2283.8	143.80	218.41	362.21
14	116.6	5.62	0.000	20.20	10.09	0.32	2.25	0.80	1.00	1.70	12.30	47.22	9.57	2,980.4	2097.5	132.20	232.54	364.74
15	125.0	5.73	5.351	21.28	16.48	0.31	2.27	0.80	1.00	1.71	17.09	62.31	13.71	3,736.0	2617.3	188.92	310.17	499.09
16	135.0	5.86	4.874	20.46	15.66	0.33	2.21	0.80	1.00	1.73	16.38	48.33	11.51	2,984.0	2194.8	180.26	243.99	424.25
17	146.0	5.99	6.624	26.87	22.12	0.40	2.07	0.80	1.00	1.74	22.36	33.45	10.73	2,915.4	2215.2	235.67	171.17	406.84
														72,136.1	44930.8			7,329.13

Section Forces

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II
		Page: 15



Load Case: 1.2D + 1.0Di + 1.0Wi 90° Wind	1.2D + 1.0Di + 1.0Wi 50 mph Wind at 90° From Face
Wind Load Factor: 1.00	Wind Importance Factor: 1.00
Dead Load Factor: 1.20	
Ice Dead Load Factor: 1.00	Ice Importance Factor: 1.00

Sect Seq	Wind Height (ft)	qz (psf)	Total Area		Ice Round Area (sqft)	Sol Ratio	Cf	Df	Dr	Ice Thick (in)	Eff Area (sqft)	Ice Area		Total Weight (lb)	Weight Ice (lb)	Struct Force (lb)	Linear Force (lb)	Total Force (lb)	
			Flat Area (sqft)	Round Area (sqft)								Linear Area (sqft)	Linear Area (sqft)						
1	10.0	3.81	25.144	48.47	28.46	0.18	2.67	0.85	1.00	1.33	49.06	87.09	19.08	9,633.9	4707.2	423.30	324.33	747.62	
2	25.0	3.81	10.139	23.07	14.93	0.18	2.68	0.85	1.00	1.46	21.78	68.19	17.02	5,546.6	2895.7	188.90	248.16	437.07	
3	35.0	3.98	14.008	22.51	15.00	0.20	2.58	0.85	1.00	1.51	24.86	68.94	17.60	5,861.3	3402.0	217.15	260.96	478.10	
4	45.0	4.28	12.630	22.42	14.91	0.21	2.57	0.85	1.00	1.55	23.65	69.52	18.05	5,418.9	3370.6	220.98	283.32	504.30	
5	55.0	4.53	12.013	22.29	14.78	0.22	2.54	0.85	1.00	1.58	23.09	69.99	18.42	5,392.2	3383.8	226.01	301.99	527.99	
6	63.4	4.72	6.401	17.08	12.01	0.23	2.49	0.85	1.00	1.60	15.36	47.47	12.61	3,498.8	2154.5	153.57	212.52	366.09	
7	70.0	4.86	9.004	15.46	11.66	0.26	2.39	0.85	1.00	1.62	16.76	45.87	12.26	3,668.8	2400.6	165.53	209.06	374.59	
8	76.6	4.98	8.624	15.52	11.57	0.26	2.39	0.85	1.00	1.63	16.46	47.78	12.85	3,591.2	2430.3	166.97	223.77	390.75	
9	83.4	5.10	6.574	14.89	11.32	0.25	2.44	0.85	1.00	1.65	14.29	47.74	12.07	3,591.0	2222.9	151.44	227.33	378.77	
10	90.0	5.22	4.328	15.28	10.94	0.25	2.45	0.85	1.00	1.66	12.61	45.92	10.78	3,122.5	1917.1	136.72	220.18	356.90	
11	96.6	5.32	6.414	14.08	10.84	0.27	2.39	0.85	1.00	1.67	13.75	47.80	11.27	3,456.6	2197.6	148.72	232.72	381.44	
12	103.4	5.43	2.125	21.36	10.58	0.32	2.23	0.85	1.00	1.68	14.86	47.68	10.86	3,472.2	2439.8	153.18	230.77	383.94	
13	110.0	5.52	1.592	20.52	10.19	0.34	2.20	0.85	1.00	1.69	13.99	45.38	9.16	3,266.3	2283.8	144.62	218.41	363.03	
14	116.6	5.62	0.000	20.20	10.09	0.32	2.25	0.85	1.00	1.70	12.30	47.22	9.57	2,980.4	2097.5	132.20	232.54	364.74	
15	125.0	5.73	5.351	21.28	16.48	0.31	2.27	0.85	1.00	1.71	17.36	62.31	13.71	3,736.0	2617.3	191.88	310.17	502.05	
16	135.0	5.86	4.874	20.46	15.66	0.33	2.21	0.85	1.00	1.73	16.63	48.33	11.51	2,984.0	2194.8	182.94	243.99	426.93	
17	146.0	5.99	6.624	26.87	22.12	0.40	2.07	0.85	1.00	1.74	22.69	33.45	10.73	2,915.4	2215.2	239.16	171.17	410.33	
														72,136.1	44930.8				7,394.64

Section Forces

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II




Page: 16

Load Case: 1.0D + 1.0W Normal Wind	1.0D + 1.0W 60 mph Wind at Normal To Face
Wind Load Factor: 1.00	Wind Importance Factor: 1.00
Dead Load Factor: 1.00	
Ice Dead Load Factor: 0.00	Ice Importance Factor: 1.00

Sect Seq	Wind Height (ft)	qz (psf)	Total Area		Ice Round Area (sqft)	Sol Ratio	Cf	Df	Dr	Ice Thick (in)	Eff Area (sqft)	Ice Area		Total Weight (lb)	Weight Ice (lb)	Struct Force (lb)	Linear Force (lb)	Total Force (lb)
			Flat Area (sqft)	Round Area (sqft)								Linear Area (sqft)	Linear Area (sqft)					
1	10.0	5.48	25.144	20.02	0.00	0.11	2.92	1.00	1.00	0.00	36.45	54.53	0.00	4,105.6	0.0	495.83	224.38	720.22
2	25.0	5.48	10.139	8.14	0.00	0.10	2.97	1.00	1.00	0.00	14.73	43.81	0.00	2,209.1	0.0	204.09	174.27	378.36
3	35.0	5.74	14.008	7.51	0.00	0.12	2.88	1.00	1.00	0.00	18.26	43.81	0.00	2,049.4	0.0	255.93	182.27	438.20
4	45.0	6.16	12.630	7.51	0.00	0.12	2.88	1.00	1.00	0.00	16.88	43.81	0.00	1,707.0	0.0	254.50	195.84	450.33
5	55.0	6.53	12.013	7.51	0.00	0.13	2.86	1.00	1.00	0.00	16.26	43.81	0.00	1,673.6	0.0	258.35	207.39	465.74
6	63.4	6.80	6.401	5.07	0.00	0.12	2.90	1.00	1.00	0.00	9.27	29.57	0.00	1,120.3	0.0	155.36	145.78	301.14
7	70.0	6.99	9.004	3.80	0.00	0.14	2.80	1.00	1.00	0.00	11.16	28.48	0.00	1,056.9	0.0	185.90	144.42	330.32
8	76.6	7.17	8.624	3.94	0.00	0.14	2.81	1.00	1.00	0.00	10.86	29.57	0.00	967.4	0.0	185.87	153.90	339.77
9	83.4	7.35	6.574	3.58	0.00	0.12	2.88	1.00	1.00	0.00	8.60	29.39	0.00	1,140.1	0.0	154.90	156.87	311.77
10	90.0	7.51	4.328	4.34	0.00	0.11	2.92	1.00	1.00	0.00	6.78	28.12	0.00	1,004.5	0.0	126.26	153.55	279.81
11	96.6	7.67	6.414	3.24	0.00	0.13	2.85	1.00	1.00	0.00	8.25	29.20	0.00	1,049.2	0.0	153.30	162.73	316.03
12	103.4	7.82	2.125	10.79	0.00	0.18	2.65	1.00	1.00	0.00	8.38	28.97	0.00	860.3	0.0	147.75	164.78	312.54
13	110.0	7.96	1.592	10.32	0.00	0.19	2.64	1.00	1.00	0.00	7.59	27.26	0.00	818.7	0.0	135.43	158.40	293.83
14	116.6	8.09	0.000	10.11	0.00	0.16	2.72	1.00	1.00	0.00	5.84	28.30	0.00	735.7	0.0	109.22	167.26	276.48
15	125.0	8.25	5.351	4.80	0.00	0.12	2.88	1.00	1.00	0.00	8.06	37.54	0.00	932.2	0.0	162.67	221.91	384.59
16	135.0	8.43	4.874	4.80	0.00	0.13	2.84	1.00	1.00	0.00	7.59	26.14	0.00	657.7	0.0	154.38	155.66	310.04
17	146.0	8.63	6.624	4.75	0.00	0.14	2.81	1.00	1.00	0.00	9.32	18.77	0.00	583.5	0.0	191.66	114.64	306.30
														22,671.1	0.0	6,215.46		

Section Forces

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II




Page: 17

Load Case: 1.0D + 1.0W 60° Wind	1.0D + 1.0W 60 mph Wind at 60° From Face
Wind Load Factor: 1.00	Wind Importance Factor: 1.00
Dead Load Factor: 1.00	
Ice Dead Load Factor: 0.00	Ice Importance Factor: 1.00

Sect Seq	Wind Height (ft)	qz (psf)	Total Area		Ice Round Area (sqft)	Sol Ratio	Cf	Df	Dr	Ice Thick (in)	Eff Area (sqft)	Ice Area		Total Weight (lb)	Weight Ice (lb)	Struct Force (lb)	Linear Force (lb)	Total Force (lb)
			Flat (sqft)	Round (sqft)								Linear (sqft)	Area (sqft)					
1	10.0	5.48	25.144	20.02	0.00	0.11	2.92	0.80	1.00	0.00	31.42	54.53	0.00	4,105.6	0.0	427.42	224.38	651.80
2	25.0	5.48	10.139	8.14	0.00	0.10	2.97	0.80	1.00	0.00	12.70	43.81	0.00	2,209.1	0.0	176.00	174.27	350.27
3	35.0	5.74	14.008	7.51	0.00	0.12	2.88	0.80	1.00	0.00	15.45	43.81	0.00	2,049.4	0.0	216.66	182.27	398.92
4	45.0	6.16	12.630	7.51	0.00	0.12	2.88	0.80	1.00	0.00	14.35	43.81	0.00	1,707.0	0.0	216.40	195.84	412.24
5	55.0	6.53	12.013	7.51	0.00	0.13	2.86	0.80	1.00	0.00	13.86	43.81	0.00	1,673.6	0.0	220.18	207.39	427.57
6	63.4	6.80	6.401	5.07	0.00	0.12	2.90	0.80	1.00	0.00	7.99	29.57	0.00	1,120.3	0.0	133.90	145.78	279.67
7	70.0	6.99	9.004	3.80	0.00	0.14	2.80	0.80	1.00	0.00	9.36	28.48	0.00	1,056.9	0.0	155.89	144.42	300.31
8	76.6	7.17	8.624	3.94	0.00	0.14	2.81	0.80	1.00	0.00	9.13	29.57	0.00	967.4	0.0	156.34	153.90	310.25
9	83.4	7.35	6.574	3.58	0.00	0.12	2.88	0.80	1.00	0.00	7.28	29.39	0.00	1,140.1	0.0	131.21	156.87	288.08
10	90.0	7.51	4.328	4.34	0.00	0.11	2.92	0.80	1.00	0.00	5.91	28.12	0.00	1,004.5	0.0	110.14	153.55	263.69
11	96.6	7.67	6.414	3.24	0.00	0.13	2.85	0.80	1.00	0.00	6.96	29.20	0.00	1,049.2	0.0	129.46	162.73	292.19
12	103.4	7.82	2.125	10.79	0.00	0.18	2.65	0.80	1.00	0.00	7.95	28.97	0.00	860.3	0.0	140.26	164.78	305.04
13	110.0	7.96	1.592	10.32	0.00	0.19	2.64	0.80	1.00	0.00	7.27	27.26	0.00	818.7	0.0	129.75	158.40	288.14
14	116.6	8.09	0.000	10.11	0.00	0.16	2.72	0.80	1.00	0.00	5.84	28.30	0.00	735.7	0.0	109.22	167.26	276.48
15	125.0	8.25	5.351	4.80	0.00	0.12	2.88	0.80	1.00	0.00	6.99	37.54	0.00	932.2	0.0	141.08	221.91	363.00
16	135.0	8.43	4.874	4.80	0.00	0.13	2.84	0.80	1.00	0.00	6.62	26.14	0.00	657.7	0.0	134.56	155.66	290.21
17	146.0	8.63	6.624	4.75	0.00	0.14	2.81	0.80	1.00	0.00	7.99	18.77	0.00	583.5	0.0	164.40	114.64	279.04
														22,671.1	0.0			5,776.91

Section Forces

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II



Page: 18


Load Case: 1.0D + 1.0W 90° Wind	1.0D + 1.0W 60 mph Wind at 90° From Face
Wind Load Factor: 1.00	Wind Importance Factor: 1.00
Dead Load Factor: 1.00	
Ice Dead Load Factor: 0.00	Ice Importance Factor: 1.00

Sect Seq	Wind Height (ft)	qz (psf)	Total Area		Ice Round Area (sqft)	Sol Ratio	Cf	Df	Dr	Ice Thick (in)	Eff Area (sqft)	Ice Area		Total Weight (lb)	Weight Ice (lb)	Struct Force (lb)	Linear Force (lb)	Total Force (lb)
			Flat Area (sqft)	Round Area (sqft)								Linear	Area					
1	10.0	5.48	25.144	20.02	0.00	0.11	2.92	0.85	1.00	0.00	32.68	54.53	0.00	4,105.6	0.0	444.52	224.38	668.91
2	25.0	5.48	10.139	8.14	0.00	0.10	2.97	0.85	1.00	0.00	13.21	43.81	0.00	2,209.1	0.0	183.02	174.27	357.29
3	35.0	5.74	14.008	7.51	0.00	0.12	2.88	0.85	1.00	0.00	16.15	43.81	0.00	2,049.4	0.0	226.48	182.27	408.74
4	45.0	6.16	12.630	7.51	0.00	0.12	2.88	0.85	1.00	0.00	14.98	43.81	0.00	1,707.0	0.0	225.93	195.84	421.76
5	55.0	6.53	12.013	7.51	0.00	0.13	2.86	0.85	1.00	0.00	14.46	43.81	0.00	1,673.6	0.0	229.72	207.39	437.11
6	63.4	6.80	6.401	5.07	0.00	0.12	2.90	0.85	1.00	0.00	8.31	29.57	0.00	1,120.3	0.0	139.26	145.78	285.04
7	70.0	6.99	9.004	3.80	0.00	0.14	2.80	0.85	1.00	0.00	9.81	28.48	0.00	1,056.9	0.0	163.39	144.42	307.81
8	76.6	7.17	8.624	3.94	0.00	0.14	2.81	0.85	1.00	0.00	9.57	29.57	0.00	967.4	0.0	163.73	153.90	317.63
9	83.4	7.35	6.574	3.58	0.00	0.12	2.88	0.85	1.00	0.00	7.61	29.39	0.00	1,140.1	0.0	137.13	156.87	294.00
10	90.0	7.51	4.328	4.34	0.00	0.11	2.92	0.85	1.00	0.00	6.13	28.12	0.00	1,004.5	0.0	114.17	153.55	267.72
11	96.6	7.67	6.414	3.24	0.00	0.13	2.85	0.85	1.00	0.00	7.28	29.20	0.00	1,049.2	0.0	135.42	162.73	298.15
12	103.4	7.82	2.125	10.79	0.00	0.18	2.65	0.85	1.00	0.00	8.06	28.97	0.00	860.3	0.0	142.13	164.78	306.92
13	110.0	7.96	1.592	10.32	0.00	0.19	2.64	0.85	1.00	0.00	7.35	27.26	0.00	818.7	0.0	131.17	158.40	289.56
14	116.6	8.09	0.000	10.11	0.00	0.16	2.72	0.85	1.00	0.00	5.84	28.30	0.00	735.7	0.0	109.22	167.26	276.48
15	125.0	8.25	5.351	4.80	0.00	0.12	2.88	0.85	1.00	0.00	7.26	37.54	0.00	932.2	0.0	146.48	221.91	368.40
16	135.0	8.43	4.874	4.80	0.00	0.13	2.84	0.85	1.00	0.00	6.86	26.14	0.00	657.7	0.0	139.51	155.66	295.17
17	146.0	8.63	6.624	4.75	0.00	0.14	2.81	0.85	1.00	0.00	8.32	18.77	0.00	583.5	0.0	171.21	114.64	285.86
														22,671.1	0.0	5,886.55		

Force/Stress Compression Summary

Structure: CT13065-A-SBA
Site Name: Guilford
Height: 152.00 (ft)
Base Elev: 0.000 (ft)
Gh: 0.85

Code: TIA-222-G
Exposure: B
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II
Topography: 1

4/26/2022

 Page: 19



LEG MEMBERS

Sect	Top Elev	Member	Force (kips)		Load Case	Len (ft)	Bracing %			Fy (ksi)	Mem Cap (kips)	Leg Use %	Controls	
			X	Y			Z	KL/R						
1	20	MOD - 5"PST+6"PX1/2P	-221.14	1.2D + 1.6W	Normal Wind	9.77	100	100	100	66.40	50.00	277.15	79.8	Member X
2	30	MOD - 4"PX+5"PX1/2P	-194.69	1.2D + 1.6W	Normal Wind	9.77	100	100	100	74.46	50.00	223.92	86.9	Member X
3	40	PX - 4" DIA PIPE	-179.98	1.2D + 1.6W	Normal Wind	9.77	50	50	50	39.60	50.00	176.95	101.7	Member X
4	50	PX - 4" DIA PIPE	-165.80	1.2D + 1.6W	Normal Wind	9.77	50	50	50	39.59	50.00	176.96	93.7	Member X
5	60	PX - 4" DIA PIPE	-150.43	1.2D + 1.6W	Normal Wind	9.77	50	50	50	39.59	50.00	176.96	85.0	Member X
6	66.75	MOD - 3"PX+4"PX1/2P	-137.99	1.2D + 1.6W	Normal Wind	6.51	100	100	100	69.83	50.00	164.38	83.9	Member X
7	73.25	PX - 3" DIA PIPE	-128.04	1.2D + 1.6W	Normal Wind	6.51	50	50	50	34.27	50.00	124.72	102.7	Member X
8	80	PX - 3" DIA PIPE	-117.68	1.2D + 1.6W	Normal Wind	6.51	50	50	50	34.27	50.00	124.72	94.4	Member X
9	86.75	MOD - 2.5"PX+3"PX1/2P	-106.89	1.2D + 1.6W	Normal Wind	6.51	50	50	50	39.86	50.00	150.70	70.9	Member X
10	93.25	MOD - 2.5"PX+3.5"PX1/2P	-96.66	1.2D + 1.6W	Normal Wind	6.51	100	100	100	85.72	50.00	107.59	89.8	Member X
11	100	PX - 2-1/2" DIA PIPE	-85.29	1.2D + 1.6W	Normal Wind	6.51	50	50	50	42.28	50.00	88.84	96.0	Member X
12	106.7	PX - 2-1/2" DIA PIPE	-73.33	1.2D + 1.6W	Normal Wind	6.51	50	50	50	42.28	50.00	88.85	82.5	Member X
13	113.2	PX - 2-1/2" DIA PIPE	-61.93	1.2D + 1.6W	Normal Wind	6.51	50	50	50	42.28	50.00	88.85	69.7	Member X
14	120	PX - 2-1/2" DIA PIPE	-50.25	1.2D + 1.6W	Normal Wind	6.51	100	100	100	84.56	50.00	60.03	83.7	Member X
15	130	PST - 2-1/2" DIA PIPE	-40.41	1.2D + 1.6W	Normal Wind	4.88	100	100	100	61.88	50.00	57.96	69.7	Member X
16	140	PST - 2-1/2" DIA PIPE	-22.30	1.2D + 1.6W	Normal Wind	4.88	100	100	100	61.88	50.00	57.96	38.5	Member X
17	152	PST - 2" DIA PIPE	-9.14	1.2D + 1.6W	Normal Wind	0.25	100	100	100	3.81	50.00	48.10	19.0	Member X

Splices

Sect	Top Elev	Load Case	Top Splice				Bottom Splice					
			Force (kips)	Cap (kips)	Use %	Bolt Type	Num Bolts	Force (kips)	Cap (kips)	Use %	Bolt Type	Num Bolts
1	20	1.2D + 1.6W Normal Wind	202.13	0.00	0.0			1.2D + 1.6W Normal Wind	227.93	0.00		
2	30	1.2D + 1.6W Normal Wind	187.42	0.00	0.0			1.2D + 1.6W Normal Wind	202.13	0.00	1 A325-X	4
3	40	1.2D + 1.6W Normal Wind	173.85	0.00	0.0			1.2D + 1.6W Normal Wind	187.42	0.00		
4	50	1.2D + 1.6W Normal Wind	158.14	0.00	0.0			1.2D + 1.6W Normal Wind	173.85	0.00	7/8 A325	4
5	60	1.2D + 1.6W Normal Wind	143.72	0.00	0.0			1.2D + 1.6W Normal Wind	158.14	0.00		
6	66.75	1.2D + 1.6W Normal Wind	132.60	0.00	0.0			1.2D + 1.6W Normal Wind	143.72	0.00	/8 A325-X	4
7	73.25	1.2D + 1.6W Normal Wind	122.96	0.00	0.0			1.2D + 1.6W Normal Wind	132.60	0.00		
8	80	1.2D + 1.6W Normal Wind	113.00	0.00	0.0			1.2D + 1.6W Normal Wind	122.96	0.00		
9	86.75	1.2D + 1.6W Normal Wind	101.44	0.00	0.0			1.2D + 1.6W Normal Wind	113.00	0.00	/4 A325-X	4
10	93.25	1.2D + 1.6W Normal Wind	91.21	0.00	0.0			1.2D + 1.6W Normal Wind	101.44	0.00		
11	100	1.2D + 1.6W Normal Wind	79.97	0.00	0.0			1.2D + 1.6W Normal Wind	91.21	0.00		
12	106.7	1.2D + 1.6W Normal Wind	67.55	0.00	0.0			1.2D + 1.6W Normal Wind	79.97	0.00	/8 A325-X	4
13	113.2	1.2D + 1.6W Normal Wind	56.38	0.00	0.0			1.2D + 1.6W Normal Wind	67.55	0.00		
14	120	1.2D + 1.6W Normal Wind	45.15	0.00	0.0			1.2D + 1.6W Normal Wind	56.38	0.00		
15	130	1.2D + 1.6W Normal Wind	26.82	0.00	0.0			1.2D + 1.6W Normal Wind	45.15	0.00	/8 A325-X	4
16	140	1.2D + 1.6W Normal Wind	9.40	0.00	0.0			1.2D + 1.6W Normal Wind	26.82	0.00		
17	152	1.2D + 1.0Di + 1.0Wi 60° Wind	0.24	0.00	0.0			1.2D + 1.6W Normal Wind	9.40	0.00	/8 A325-X	4

HORIZONTAL MEMBERS

Sect	Top Elev	Member	Force (kips)	Load Case	Len (ft)	Bracing %	Fy (ksi)	Mem			Shear Bear		Use %	Controls
								Cap (kips)	Num Bolts	Num Holes	Cap (kips)	Cap (kips)		
1	20							0.00	0	0				
2	30							0.00	0	0				
3	40							0.00	0	0				
4	50							0.00	0	0				
5	60							0.00	0	0				
6	66.7							0.00	0	0				
7	73.2							0.00	0	0				

Force/Stress Compression Summary

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II



Page: 20

HORIZONTAL MEMBERS

Sect	Top Elev	Member	Force (kips)		Load Case	Len (ft)	Bracing %			Fy (ksi)	Mem Cap (kips)	Num Bolts	Num Holes	Shear Bear		Use %	Controls	
							X	Y	Z					Cap (kips)	Cap (kips)			
8	80										0.00	0	0					
9	86.7										0.00	0	0					
10	93.2										0.00	0	0					
11	100										0.00	0	0					
12	106.										0.00	0	0					
13	113.										0.00	0	0					
14	120										0.00	0	0					
15	130										0.00	0	0					
16	140										0.00	0	0					
17	152	SAE - 2x2x0.125	-0.68	0.9D + 1.6W	Normal Wind	6.52	100	100	100	196.61	36.00	2.81	10	10	972.00	696.0	24	Member Z

DIAGONAL MEMBERS


Sect	Top Elev	Member	Force (kips)		Load Case	Len (ft)	Bracing %			Fy (ksi)	Mem Cap (kips)	Num Bolts	Num Holes	Shear Bear		Use %	Controls	
							X	Y	Z					Cap (kips)	Cap (kips)			
1	20	SAE - 3.5X3.5X0.25	-7.52	0.9D + 1.6W	90° Wind	22.49	49	49	49	190.56	50.00	10.51	1	1	15.19	11.6	72	Member Z
2	30	SAE - 3X3X0.375	-7.46	0.9D + 1.6W	90° Wind	20.68	49	49	49	207.19	36.00	11.10	1	1	15.19	26.1	67	Member Z
3	40	SAE - 3X3X0.375	-8.03	1.2D + 1.6W	90° Wind	19.80	49	49	49	198.33	36.00	12.12	1	1	15.19	26.1	66	Member Z
4	50	SAE - 3X3X0.25	-7.45	0.9D + 1.6W	90° Wind	18.90	49	49	49	187.70	36.00	9.23	1	1	15.19	17.4	81	Member Z
5	60	SAE - 3X3X0.25	-7.87	1.2D + 1.6W	90° Wind	18.07	49	49	49	179.47	36.00	10.10	1	1	15.19	14.7	78	Member Z
6	66.7	SAE - 2.5X2.5X0.25	-6.40	1.2D + 1.6W	90° Wind	15.74	49	49	49	188.47	36.00	7.57	1	1	9.72	13.9	85	Member Z
7	73.2	SAE - 2.5X2.5X0.25	-6.31	1.2D + 1.6W	90° Wind	15.12	49	49	49	181.08	36.00	8.20	1	1	9.72	13.9	77	Member Z
8	80	SAE - 2.5X2.5X0.1875	-6.49	1.2D + 1.6W	90° Wind	14.51	47	47	47	165.32	36.00	7.46	1	1	9.72	6.20	105	Bolt Bear
9	86.7	SAE - 2X2X0.375	-6.15	1.2D + 1.6W	90° Wind	13.87	49	49	49	209.60	36.00	6.99	1	1	9.72	20.8	88	Member Z
10	93.2	SAE - 2X2X0.375	-5.83	1.2D + 1.6W	90° Wind	13.28	49	49	49	200.80	36.00	7.62	1	1	9.72	20.8	76	Member Z
11	100	SAE - 2X2X0.375	-6.42	1.2D + 1.6W	90° Wind	12.71	49	49	49	192.11	36.00	8.32	1	1	9.72	20.8	77	Member Z
12	106.	MOD - 2L2x2x1/8_Speci	5.99	1.2D + 1.6W	90° Wind	12.11	49	49	49	117.95	36.00	15.28	1	1	9.72		62	Bolt Shear
13	113.	MOD - 2L2x2x1/8_Speci	5.21	1.2D + 1.6W	90° Wind	11.56	49	49	49	114.00	36.00	16.03	1	1	9.72		54	Bolt Shear
14	120	MOD - 2L2x2x1/8_Speci	5.60	1.2D + 1.6W	90° Wind	11.03	49	49	49	110.14	36.00	16.78	1	1	9.72		58	Bolt Shear
15	130	SAE - 1.75X1.75X0.25	-4.84	1.2D + 1.6W	90° Wind	9.62	50	50	50	169.29	36.00	6.38	1	1	9.72	13.9	76	Member Z
16	140	SAE - 1.75X1.75X0.125	-3.94	1.2D + 1.6W	90° Wind	8.39	50	50	50	145.13	36.00	4.50	1	1	9.72	4.13	95	Bolt Bear
17	152	SAE - 1.5X1.5X0.125	-2.24	1.2D + 1.6W	90° Wind	7.64	50	50	50	154.78	36.00	3.39	1	1	9.72	4.13	66	Member Z

Force/Stress Tension Summary

Structure: CT13065-A-SBA
Site Name: Guilford
Height: 152.00 (ft)
Base Elev: 0.000 (ft)
Gh: 0.85

Topography: 1

Code: TIA-222-G
Exposure: B
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II

4/26/2022

 Page: 21



LEG MEMBERS

Sect	Top Elev	Member	Force (kips)	Load Case	Fy (ksi)	Mem Cap (kips)	Leg Use %	Controls
1	20	MOD - 5"PST+6"PX1/2P	196.67	0.9D + 1.6W 60° Wind	50	382.59	51.4	Member
2	30	MOD - 4"PX+5"PX1/2P	174.35	0.9D + 1.6W 60° Wind	50	335.85	51.9	Member
3	40	PX - 4" DIA PIPE	155.58	0.9D + 1.6W 60° Wind	50	198.45	78.4	Member
4	50	PX - 4" DIA PIPE	150.49	0.9D + 1.6W 60° Wind	50	198.45	75.8	Member
5	60	PX - 4" DIA PIPE	130.00	0.9D + 1.6W 60° Wind	50	198.45	65.5	Member
6	66.75	MOD - 3"PX+4"PX1/2P	124.21	0.9D + 1.6W 60° Wind	50	234.80	52.9	Member
7	73.25	PX - 3" DIA PIPE	110.31	0.9D + 1.6W 60° Wind	50	135.90	81.2	Member
8	80	PX - 3" DIA PIPE	101.09	0.9D + 1.6W 60° Wind	50	135.90	74.4	Member
9	86.75	MOD - 2.5"PX+3"PX1/2P	97.00	0.9D + 1.6W 60° Wind	50	169.27	57.3	Member
10	93.25	MOD - 2.5"PX+3.5"PX1/2P	82.07	0.9D + 1.6W 60° Wind	50	184.12	44.6	Member
11	100	PX - 2-1/2" DIA PIPE	71.84	0.9D + 1.6W 60° Wind	50	101.25	71.0	Member
12	106.75	PX - 2-1/2" DIA PIPE	67.16	0.9D + 1.6W 60° Wind	50	101.25	66.3	Member
13	113.25	PX - 2-1/2" DIA PIPE	51.44	0.9D + 1.6W 60° Wind	50	101.25	50.8	Member
14	120	PX - 2-1/2" DIA PIPE	40.71	0.9D + 1.6W 60° Wind	50	101.25	40.2	Member
15	130	PST - 2-1/2" DIA PIPE	35.99	0.9D + 1.6W 60° Wind	50	76.68	46.9	Member
16	140	PST - 2-1/2" DIA PIPE	16.60	0.9D + 1.6W 60° Wind	50	76.68	21.7	Member
17	152	PST - 2" DIA PIPE	6.37	0.9D + 1.6W 60° Wind	50	48.15	13.2	Member

Splices

Sect	Top Elev	Top Splice					Bottom Splice						
		Load Case	Force (kips)	Cap (kips)	Use %	Bolt Type	Num Bolts	Load Case	Force (kips)	Cap (kips)	Use %	Bolt Type	Num Bolts
1	20	0.9D + 1.6W 60° Wind	174.10	0.00	0.0		0.9D + 1.6W 60° Wind	196.6	0.00				
2	30	0.9D + 1.6W 60° Wind	161.51	0.00	0.0		0.9D + 1.6W 60° Wind	174.1	212.04	82.1	1	A325-X	4
3	40	0.9D + 1.6W 60° Wind	150.22	0.00	0.0		0.9D + 1.6W 60° Wind	161.5	0.00				
4	50	0.9D + 1.6W 60° Wind	136.49	0.00	0.0		0.9D + 1.6W 60° Wind	150.2	166.24	90.4	7/8	A325	4
5	60	0.9D + 1.6W 60° Wind	123.96	0.00	0.0		0.9D + 1.6W 60° Wind	136.4	0.00				
6	66.75	0.9D + 1.6W 60° Wind	114.16	0.00	0.0		0.9D + 1.6W 60° Wind	123.9	166.24	74.6	7/8	A325-X	4
7	73.25	0.9D + 1.6W 60° Wind	105.32	0.00	0.0		0.9D + 1.6W 60° Wind	114.1	0.00				
8	80	0.9D + 1.6W 60° Wind	96.89	0.00	0.0		0.9D + 1.6W 60° Wind	105.3	0.00				
9	86.75	0.9D + 1.6W 60° Wind	86.28	0.00	0.0		0.9D + 1.6W 60° Wind	96.89	120.40	80.5	3/4	A325-X	4
10	93.25	0.9D + 1.6W 60° Wind	76.72	0.00	0.0		0.9D + 1.6W 60° Wind	86.28	0.00				
11	100	0.9D + 1.6W 60° Wind	67.03	0.00	0.0		0.9D + 1.6W 60° Wind	76.72	0.00				
12	106.75	0.9D + 1.6W 60° Wind	55.29	0.00	0.0		0.9D + 1.6W 60° Wind	67.03	82.84	80.9	5/8	A325-X	4
13	113.25	0.9D + 1.6W 60° Wind	46.00	0.00	0.0		0.9D + 1.6W 60° Wind	55.29	0.00				
14	120	0.9D + 1.6W 60° Wind	35.89	0.00	0.0		0.9D + 1.6W 60° Wind	46.00	0.00				
15	130	0.9D + 1.6W 60° Wind	18.52	0.00	0.0		0.9D + 1.6W 60° Wind	35.89	82.84	43.3	5/8	A325-X	4
16	140	0.9D + 1.6W 60° Wind	6.47	0.00	0.0		0.9D + 1.6W 60° Wind	18.52	0.00				
17	152	0.9D + 1.6W 60° Wind	0.00	0.00	0.0		0.9D + 1.6W 60° Wind	6.47	82.84	7.8	5/8	A325-X	4

HORIZONTAL MEMBERS

Sect	Top Elev	Member	Force (kips)	Load Case	Fy (ksi)	Mem Cap (kips)	Num Bolts	Num Holes	Shear Cap (kips)	Bear Cap (kips)	B.S. Cap (kips)	Use %	Controls
1	20	-			50	0.00	0	0					
2	30	-			36	0.00	0	0					
3	40	-			36	0.00	0	0					
4	50	-			36	0.00	0	0					
5	60	-			36	0.00	0	0					
6	66.75	-			36	0.00	0	0					
7	73.25	-			36	0.00	0	0					
8	80	-			36	0.00	0	0					

Force/Stress Tension Summary

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II



Page: 22

HORIZONTAL MEMBERS

Sect	Top Elev	Member	Force (kips)	Load Case	Fy (ksi)	Mem Cap (kips)	Num Bolts	Num Holes	Shear Cap (kips)	Bear Cap (kips)	B.S. Cap (kips)	Use %	Controls
9	86.75	-			36	0.00	0	0					
10	93.25	-			36	0.00	0	0					
11	100	-			36	0.00	0	0					
12	106.75	-			36	0.00	0	0					
13	113.25	-			36	0.00	0	0					
14	120	-			36	0.00	0	0					
15	130	-			36	0.00	0	0					
16	140	-			36	0.00	0	0					
17	152	SAE - 2x2x0.125	0.77	1.2D + 1.6W 60° Wind	36	-318.96	100	100	972.00	696.00	287.78	0.2	Member

DIAGONAL MEMBERS

Sect	Top Elev	Member	Force (kips)	Load Case	Fy (ksi)	Mem Cap (kips)	Num Bolts	Num Holes	Shear Cap (kips)	Bear Cap (kips)	B.S. Cap (kips)	Use %	Controls
1	20	SAE - 3.5X3.5X0.25	7.93	0.9D + 1.6W 90° Wind	50	54.94	1	1	15.19	11.69	23.91	67.8	Bolt Bear
2	30	SAE - 3X3X0.375	7.48	1.2D + 1.6W 90° Wind	36	59.66	1	1	15.19	26.10	23.39	49.2	Bolt Shear
3	40	SAE - 3X3X0.375	7.54	0.9D + 1.6W 90° Wind	36	59.66	1	1	15.19	26.10	23.39	49.6	Bolt Shear
4	50	SAE - 3X3X0.25	7.46	1.2D + 1.6W 90° Wind	36	40.86	1	1	15.19	17.40	15.59	49.1	Bolt Shear
5	60	SAE - 3X3X0.25	7.42	0.9D + 1.6W 90° Wind	36	40.86	1	1	15.19	14.79	14.58	50.9	Blck Shear
6	66.75	SAE - 2.5X2.5X0.25	6.52	1.2D + 1.6W 90° Wind	36	33.73	1	1	9.72	13.92	14.91	67.1	Bolt Shear
7	73.25	SAE - 2.5X2.5X0.25	6.04	1.2D + 1.6W 90° Wind	36	33.73	1	1	9.72	13.92	14.91	62.2	Bolt Shear
8	80	SAE - 2.5X2.5X0.1875	6.38	1.2D + 1.6W 90° Wind	36	25.60	1	1	9.72	6.20	9.79	102.9	Bolt Bear
9	86.75	SAE - 2X2X0.375	6.12	1.2D + 1.6W 90° Wind	36	36.72	1	1	9.72	20.88	18.29	63.0	Bolt Shear
10	93.25	SAE - 2X2X0.375	5.80	1.2D + 1.6W 90° Wind	36	36.72	1	1	9.72	20.88	18.29	59.6	Bolt Shear
11	100	SAE - 2X2X0.375	6.17	1.2D + 1.6W 90° Wind	36	36.72	1	1	9.72	20.88	18.29	63.5	Bolt Shear
12	106.75	MOD - 2L2x2x1/8_Special	5.96	1.2D + 1.6W 90° Wind	36	31.78	1	1	9.72			61.3	Bolt Shear
13	113.25	MOD - 2L2x2x1/8_Special	5.18	1.2D + 1.6W 90° Wind	36	31.78	1	1	9.72			53.3	Bolt Shear
14	120	MOD - 2L2x2x1/8_Special	5.40	1.2D + 1.6W 90° Wind	36	31.78	1	1	9.72			55.6	Bolt Shear
15	130	SAE - 1.75X1.75X0.25	4.97	1.2D + 1.6W 90° Wind	36	21.33	1	1	9.72	13.92	10.83	51.1	Bolt Shear
16	140	SAE - 1.75X1.75X0.125	3.80	1.2D + 1.6W 90° Wind	36	11.15	1	1	9.72	4.13	3.81	99.9	Blck Shear
17	152	SAE - 1.5X1.5X0.125	2.18	0.9D + 1.6W 90° Wind	36	9.20	1	1	9.72	4.13	3.81	57.3	Blck Shear

Support Forces Summary

Structure: CT13065-A-SBA
Site Name: Guilford
Height: 152.00 (ft)
Base Elev: 0.000 (ft)
Gh: 0.85

Topography: 1

Code: TIA-222-G
Exposure: B
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II

4/26/2022

 Page: 23



Load Case	Node	FX (kips)	FY (kips)	FZ (kips)	(-) = Uplift (+) = Down
<hr/>					
1.2D + 1.6W Normal Wind	1	0.01	227.27	-23.94	
	1a	7.87	-93.04	-8.32	
	1b	-7.88	-93.08	-8.30	
<hr/>					
1.2D + 1.6W 60° Wind	1	-3.09	116.76	-11.74	
	1a	-11.72	116.77	3.18	
	1b	-18.60	-192.39	-10.73	
<hr/>					
1.2D + 1.6W 90° Wind	1	-3.60	13.70	-0.63	
	1a	-18.34	193.82	8.47	
	1b	-17.13	-166.39	-7.84	
<hr/>					
0.9D + 1.6W Normal Wind	1	0.01	223.52	-23.75	
	1a	8.03	-96.32	-8.41	
	1b	-8.05	-96.35	-8.40	
<hr/>					
0.9D + 1.6W 60° Wind	1	-3.09	113.17	-11.54	
	1a	-11.55	113.18	3.08	
	1b	-18.76	-195.50	-10.82	
<hr/>					
0.9D + 1.6W 90° Wind	1	-3.61	10.28	-0.44	
	1a	-18.17	190.12	8.37	
	1b	-17.29	-169.54	-7.93	
<hr/>					
1.2D + 1.0Di + 1.0Wi Normal Wind	1	0.00	88.40	-6.61	
	1a	1.64	5.88	-1.91	
	1b	-1.65	5.82	-1.90	
<hr/>					
1.2D + 1.0Di + 1.0Wi 60° Wind	1	-0.80	60.40	-3.54	
	1a	-3.47	60.43	1.08	
	1b	-4.53	-20.74	-2.61	
<hr/>					
1.2D + 1.0Di + 1.0Wi 90° Wind	1	-0.93	33.36	-0.62	
	1a	-5.18	80.43	2.45	
	1b	-4.11	-13.69	-1.84	
<hr/>					
1.0D + 1.0W Normal Wind	1	0.00	58.51	-5.77	
	1a	1.31	-12.10	-1.60	
	1b	-1.31	-12.13	-1.60	
<hr/>					
1.0D + 1.0W 60° Wind	1	-0.68	34.13	-3.08	
	1a	-3.01	34.16	0.95	
	1b	-3.69	-34.02	-2.13	
<hr/>					
1.0D + 1.0W 90° Wind	1	-0.80	11.42	-0.63	
	1a	-4.47	51.16	2.12	
	1b	-3.37	-28.29	-1.49	
<hr/>					

Max Reactions

Leg	Overturning
Max Uplift: -195.50 (kips)	Moment: 3843.33 (ft-kips)
Max Down: 227.27 (kips)	Total Down: 41.14 (kips)
Max Shear: 23.94 (kips)	Total Shear: 40.56 (kips)

Analysis Summary

Structure: CT13065-A-SBA	Code: TIA-222-G	4/26/2022
Site Name: Guilford	Exposure: B	
Height: 152.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: D - Stiff Soil	
Gh: 0.85	Topography: 1	Struct Class: II
		Page: 24



Max Reactions

	Leg	Overturning
Max Uplift:	-195.50 (kips)	Moment: 3843.33 (ft-kips)
Max Down:	227.27 (kips)	Total Down: 41.14 (kips)
Max Shear:	23.94 (kips)	Total Shear: 40.56 (kips)

Anchor Bolts

Bolt Size (in.): 1.00	Number Bolts: 4
Yield Strength (Ksi): 92.00	Tensile Strength (Ksi): 120.00
Detail Type: B	

Interaction Ratio: 0.99

Max Usages

Max Leg: 102.7% (1.2D + 1.6W Normal Wind - Sect 7)
 Max Diag: 104.7% (1.2D + 1.6W 90° Wind - Sect 8)
 Max Horiz: 24.2% (0.9D + 1.6W Normal Wind - Sect 17)

Max Deflection, Twist and Sway

Load Case	Elevation (ft)	Deflection (ft)	Twist (deg)	Sway (deg)
0.9D + 1.6W 101 mph Wind at 60° From Face	80.25	0.3305	0.0623	0.6744
	106.75	0.6210	0.0969	0.6758
	130.00	0.9612	0.1541	0.9651
	139.75	1.1237	0.1835	1.1892
	148.08	1.2648	0.1832	0.9866
0.9D + 1.6W 101 mph Wind at 90° From Face	80.25	0.3338	0.0377	0.7645
	106.75	0.6259	-0.1164	0.6951
	130.00	0.9682	-0.1820	0.9597
	139.75	1.1320	-0.2155	1.1669
	148.08	1.2734	-0.2180	0.9768
0.9D + 1.6W 101 mph Wind at Normal To Face	80.25	0.3410	0.0570	0.6878
	106.75	0.6393	0.0931	0.6956
	130.00	0.9875	0.1415	0.9885
	139.75	1.1537	0.1665	1.2203
	148.08	1.2979	0.1672	1.0494
1.0D + 1.0W 60 mph Wind at 60° From Face	80.25	0.0730	0.0090	0.1482
	106.75	0.1371	-0.0125	0.1494
	130.00	0.2122	-0.0203	0.2137
	139.75	0.2481	-0.0252	0.2642
	148.08	0.2792	0.0239	0.2167
1.0D + 1.0W 60 mph Wind at 90° From Face	80.25	0.0738	0.0067	0.1665
	106.75	0.1383	-0.0212	0.1538
	130.00	0.2139	-0.0336	0.2124
	139.75	0.2501	-0.0404	0.2591
	148.08	0.2813	-0.0404	0.2177

1.0D + 1.0W 60 mph Wind at Normal To Face	80.25	0.0753	0.0102	0.1529
	106.75	0.1411	0.0152	0.1539
	130.00	0.2180	0.0240	0.2176
	139.75	0.2547	0.0291	0.2678
	148.08	0.2866	0.0284	0.2297

1.2D + 1.0Di + 1.0Wi 50 mph Wind at 60° From Face	80.25	0.0860	0.0131	0.1775
	106.75	0.1632	0.0195	0.1742
	130.00	0.2508	0.0311	0.2493
	139.75	0.2920	0.0375	0.3062
	148.08	0.3281	0.0369	0.2531

1.2D + 1.0Di + 1.0Wi 50 mph Wind at 90° From Face	80.25	0.0860	0.0086	0.1997
	106.75	0.1638	-0.0288	0.1792
	130.00	0.2515	-0.0457	0.2468
	139.75	0.2929	-0.0543	0.2989
	148.08	0.3289	-0.0553	0.2542

1.2D + 1.0Di + 1.0Wi 50 mph Wind at Normal From Face	80.25	0.0888	0.0136	0.1790
	106.75	0.1652	0.0211	0.1781
	130.00	0.2539	0.0328	0.2488
	139.75	0.2959	0.0391	0.3020
	148.08	0.3322	0.0388	0.2786

1.2D + 1.6W 101 mph Wind at 60° From Face	80.25	0.3311	0.0627	0.6759
	106.75	0.6224	0.0976	0.6774
	130.00	0.9635	0.1553	0.9681
	139.75	1.1264	0.1850	1.1934
	148.08	1.2680	0.1848	0.9892

1.2D + 1.6W 101 mph Wind at 90° From Face	80.25	0.3344	0.0379	0.7663
	106.75	0.6274	-0.1172	0.6969
	130.00	0.9706	-0.1834	0.9623
	139.75	1.1349	-0.2172	1.1702
	148.08	1.2766	-0.2197	0.9803

1.2D + 1.6W 101 mph Wind at Normal To Face	80.25	0.3416	0.0574	0.6896
	106.75	0.6407	0.0937	0.6975
	130.00	0.9899	0.1425	0.9912
	139.75	1.1565	0.1677	1.2236
	148.08	1.3012	0.1684	1.0514



Self Supporting Tower Footing Design

Date

4/26/2022

Customer Name:	SBA Communications Corp	TIA Standard:	TIA-222-G
Site Name:		Structure Height (Ft.):	152
Site Number:	CT13065-A-SBA	Engineer Name:	M. Al Rubaye
Engr. Number:	128252	Engineer Login ID:	

Foundation Info Obtained from:

Drawings/Calculations

Structure Type:

Self Supporting Tower

Analysis or Design?

Analysis

Base Reactions (Factored):

Axial Load (Kips):	227.3	Shear Force (Kips):	23.9
Uplift Force (Kips):	195.5	Moment (Kips-ft):	0.0

Allowable overstress %: 5.0%

Foundation Geometries:


Pad Base w/ toe or in Rock-Yes/No ?	No	Mods required -Yes/No ?:	Yes
Diameter of Pier (ft.):	Square 3.500	Depth of Base BG (ft.):	7.0
Pier Height A. G. (ft.):	0.50	Thickness of Pad (ft):	1.70
Length of Pad (ft.):	16	Width of Pad (ft.):	16
Add Concrete Width & Length (ft.)	6.5	Add Concrete Thick. (ft)	0.926
Final Length of pad (ft)	16.0	Final width of pad (ft):	16.0

Consider ties in concrete shear strength ?:

Yes

Material Properties and Reabr Info:

Concrete Strength (psi):	3000	Steel Elastic Modulus:	29000	ksi
Vertical bar yield (ksi)	60	Tie steel yield (ksi):	60	
Vertical Rebar Size #:	8	Tie / Stirrup Size #:	3	
Qty. of Vertical Rebars:	12	Tie Spacing (in):	6.0	
Pad Rebar Yield (Ksi):	60	Pad Steel Rebar Size (#):	8	
Concrete Cover (in.):	3	Unit Weight of Concrete:	150.0	pcf
Rebar at the bottom of the concrete pad:				
Qty. of Rebar in Pad (L):	12	Qty. of Rebar in Pad (W):	12	
Rebar at the top of the concrete pad:				
Qty. of Rebar in Pad (L):	12	Qty. of Rebar in Pad (W):	12	

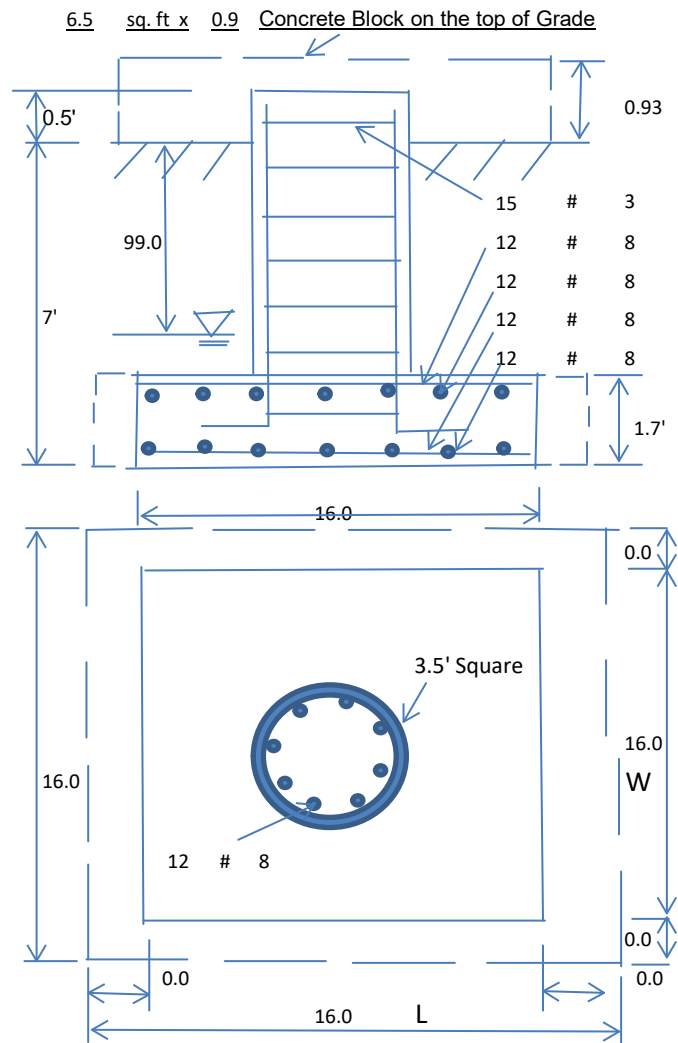

Soil Design Parameters:

Soil Unit Weight (pcf):	120.0	Soil Buoyant Weight:	50.0	Pcf	
Water Table B.G.S. (ft):	99.0	Unit Weight of Water:	62.4	pcf	Angle from Top of Pad: 30
Ultimate Bearing Pressure (psf):	10000	Ultimate Skin Friction:	0	Psf	Angle from Bottm of Pad: 30

Foundation Analysis and Design:

Uplift Strength Reduction Factor:	0.75
Compression Strength Reduction Factor:	0.75

Total Dry Soil Volume (cu. Ft.):	1860.47	Total Dry Soil Weight (Kips):	223.26
Total Buoyant Soil Volume (cu. Ft.):	0.00	Total Buoyant Soil Weight (Kips):	0.00
Total Effective Soil Weight (Kips):	223.26	Weight from the Concrete Block at Top (K):	4.95
Total Dry Concrete Volume (cu. Ft.):	539.25	Total Dry Concrete Weight (Kips):	80.89
Total Buoyant Concrete Volume (cu. Ft.):	0.00	Total Buoyant Concrete Weight (Kips):	0.00
Total Effective Concrete Weight (Kips):	80.89	Total Vertical Load on Base (Kips):	531.41

Check Soil Capacities:

Calculated Maxium Net Soil Pressure under the base (psf):	1208.41	<	Allowable Factored Soil Bearing (psf):	7500	0.16	OK!
Calculated Foundation Allowable Axail Capacity (Kips):	1920.0	>	Design Factored Axial Load (Kips):	246	0.13	OK!
Calculated Foundation Uplift Capacity (Kips):	263.49	>	Design Factored Uplift Load (Kips):	196	0.74	OK!

Load/
Capacity
Ratio

Check the capacities of Reinforcing Concrete:

Strength reduction factor (Flexure and axial tension):	0.90	Strength reduction factor (Shear):	0.75
Strength reduction factor (Axial compression):	0.65	Wind Load Factor on Concrete Design:	1.00

(1) Concrete Pier:

				Load/ Capacity Ratio	
Vertical Steel Rebar Area (sq. in./each):	0.79	Tie / Stirrup Area (sq. in./each):	0.11		
Calculated Moment Capacity (Mn,Kips-Ft):	562.2	> Design Factored Moment (Mu, Kips-Ft)	138.8	0.25	OK!
Calculated Shear Capacity (Kips):	166.9	> Design Factored Shear (Kips):	23.9	0.14	OK!
Calculated Tension Capacity (Tn, Kips):	511.9	> Design Factored Tension (Tu Kips):	195.5	0.38	OK!
Calculated Compression Capacity (Pn, Kips):	2326.5	> Design Factored Axial Load (Pu Kips):	227.3	0.10	OK!
Moment & Axial Strength Combination:	0.25	OK! Check Tie Spacing (Design/Required):		0.5	OK!
Pier Reinforcement Ratio:	0.005				

(2).Concrete Pad:

One-Way Design Shear Capacity (L-Dir. Kips);	266.6	> One-Way Factored Shear (L-Dir Kips):	71.6	0.27	OK!
One-Way Design Shear Capacity (W-Dir. Kips):	266.6	> One-Way Factored Shear (W-Dir Kips)	71.6	0.27	OK!
Two-Way Design Shear Capacity (Kips):	560.9	> Two-Way Factored Shear (Kips):	205.8	0.37	OK!
Lower Steel Pad Reinforcement Ratio (L-Direct.):	0.0029	Lower Steel Pad Reinf. Ratio (W-Direc	0.0029		OK!
Lower Steel Pad Moment Capacity (L-Direction. Kips-ft):	696.2	> Moment at Bottom (L-Direct. K-Ft):	281.5	0.40	OK!
Lower Steel Pad Moment Capacity (W-Dir. Kips-ft):	696.2	> Moment at Bottom (W-Dir. Kips-Ft):	281.5	0.40	OK!
Upper Steel Pad Reinforcement Ratio (L-Direct.):	0.0029	Upper Steel Reinf. Ratio (W-Direct.):	0.0029		OK!
Upper Steel Pad Moment Capacity (L-Direction. Kips-ft):	696.2	> Moment at the top (L-Dir Kips-Ft):	221.9	0.32	OK!
Upper Steel Pad Moment Capacity (W-Dir. Kips-ft):	696.2	> Moment at the top (W-Dir Kips-Ft):	221.9	0.32	OK!

Exhibit E

Mount Analysis



June 20, 2022

Sherri Knapik
SBA Network Services, LLC.
134 Flanders Road, Suite 125
Westborough, MA 01581
(508) 251-0720 x 3805

MTS Engineering, P.L.L.C.
1717 S. Boulder, Suite 300
Tulsa, OK 74119
(918) 587-4630
towersupport@btgrp.com

Subject: Appurtenance Mount Analysis Report

Carrier Designation: *Dish Wireless Co-Locate*
Site Number: BOHVN00180A
Site Name: N/A

SBA Network Services Designation: **Site Number:** CT13065-A
Site Name: Guilford
Application Number: 169197, v1

Engineering Firm Designation: **Project Number:** 149543.003.01

Site Data: 331 Killingworth Road (Rt 80), Guilford, CT, 06437, New Haven County
Latitude 41.35316°, Longitude -72.68825°
Self-Support Tower
8' Sector Mount

Dear Ms. Knapik,

We are pleased to submit this “**Appurtenance Mount Analysis Report**” to determine the structural integrity of the antenna mount on the above-mentioned structure.

The purpose of the analysis is to determine acceptability of the mount’s stress level. Based on our analysis we have determined the stress level for the mount under the following load case to be:

Proposed Equipment

Note: See Table 1 for the final loading configuration

**Sufficient Capacity
(Passing at 52.1%)**

This analysis utilizes an ultimate 3-second gust wind speed of 122 mph as required by the 2018 Connecticut State Building Code. Applicable Standard references and design criteria are listed in Section 2 - Analysis Criteria.

We appreciate the opportunity of providing our continuing professional services to you and *SBA Network Services, LLC*. If you have any questions or need further assistance on this or any other projects, please give us a call.

Mount structural analysis prepared by: Krista Loyd, E.I.T.

Respectfully submitted by: MTS Engineering, P.L.L.C.
COA: BER: 2386985 Expires: 02/01/2023



Chad E. Tuttle, P.E.

TABLE OF CONTENTS

1) INTRODUCTION

2) ANALYSIS CRITERIA

Table 1 - Proposed Equipment Information

Table 2 - Documents Provided

3) ANALYSIS PROCEDURE

3.1) Analysis Method

3.2) Assumptions

4) ANALYSIS RESULTS

Table 3 – Mount Component Stresses vs. Capacity

5) RECOMMENDATIONS

6) APPENDIX A

RISA-3D Output

7) APPENDIX B

Additional Calculations

1) INTRODUCTION

The appurtenance mount consists of Commscope sector mounts (Part# MTC3975083) at 105 ft., attached to self-support tower at 331 Killingworth Road (Rt 80), Guilford, CT, 06437, New Haven County. The proposed antenna loading information was obtained from SBA Network Services, LLC. All information provided to us was assumed accurate and complete.

2) ANALYSIS CRITERIA

The structural analysis was performed for this mount in accordance with the ANSI/TIA-222-H-2017 Structural Standard for Antenna Supporting Structures and Antennas and Small Wind Turbine Support Structures using a 3-second gust wind speed of 122 mph with no ice and 50 mph with 1 inch escalated ice thickness. Exposure Category B, Topographic Category 1 and Risk Category II were used in this analysis. In addition, the sector mount has been analyzed for various live loading conditions consisting of a 250-lb man live load applied individually at the midpoint and cantilevered ends of horizontal members as well as a 500-pound man live load applied individually at mount pipe locations using a 3-second gust of 30 mph. The mount was analyzed under 30° increments in the wind direction. The analyzed loading is detailed in Table 1.

Table 1 – Proposed Equipment Information

Loading	RAD Center Elev. (ft.)	Position	Qty.	Description	Note
Proposed	105	1	3	JMA Wireless MX08FRO665-21	1
			3	Fujitsu TA08025-B605	2
			3	Fujitsu TA08025-B604	
		--	1	Raycap RDIDC-9181-PF-48	3

Note:

- (1) Proposed Antenna to be installed on the proposed Mount Pipe.
- (2) Proposed Equipment to be installed directly behind the Antenna.
- (3) Proposed Equipment to be installed on the Mount.

Table 2 - Documents Provided

Documents	Remarks	Reference	Source
Collo App	Proposed Loading	Date: 08/11/2021	SBA Network Services, LLC.
RFDS		Date: 07/23/2021	

3) ANALYSIS PROCEDURE

3.1) Analysis Method

RISA-3D (Version 20.0.2), a commercially available analysis software package, was used to create a three-dimensional model of the mount and calculate member stresses and deflections for various loading cases. Selected output from the analysis is included in Appendix A.

Manufacturers drawing were used to create the model.

3.2) Assumptions

1. The mount was built in accordance with the manufacturer's specifications.
2. The mount has been maintained in accordance with the manufacturer's specifications and is free of damage.
3. The configuration of antennas and other appurtenances are as specified in Table 1.
4. All mount components have been assumed to be in sufficient condition to carry their full design capacity for the analysis.

5. Mount areas and weights are determined from field measurements, standard material properties, and/or manufacturer product data.
6. Serviceability with respect to antenna twist, tilt, roll or lateral translation is not checked and is left to the carrier or tower owner to ensure conformance.
7. All prior structural modifications, if any are assumed to be correctly installed and fully effective.
8. All member connections are assumed to have been designed to meet or exceed the load carrying capacity of the connected member unless otherwise specified in this report.
9. The following material grades were assumed (Unless Noted Otherwise):
 - a) Connection Bolts : ASTM A325
 - b) Steel Pipe : ASTM A53 (GR. 35)
 - c) HSS (Round) : ASTM 500 (GR. B-42)
 - d) HSS (Rectangular) : ASTM 500 (GR. B-46)
 - e) Channel : ASTM A36 (GR. 36)
 - f) Steel Solid Rod : ASTM A36 (GR. 36)
 - g) Steel Plate : ASTM A36 (GR. 36)
 - h) Steel Angle : ASTM A36 (GR. 36)
 - i) UNISTRUT : ASTM A570 (GR. 33)

This analysis may be affected if any assumptions are not valid or have been made in error. MTS Engineering, P.L.L.C. should be notified to determine the effect on the structural integrity of the antenna mounting system.

4) ANALYSIS RESULTS

Table 3 – Mount Component Stresses vs. Capacity

Notes	Component	Elevation (ft.)	% Capacity	Pass / Fail
-	Face Horizontals	105	12.8	Pass
-	Support Arms	105	29.5	Pass
-	Diagonals	105	29.8	Pass
-	Connection Plates	105	24.6	Pass
-	Verticals	105	52.1	Pass
-	Tieback	105	15.1	Pass
-	Mount Pipes	105	16.0	Pass
-	Connection Bolts	105	10.6	Pass

5) RECOMMENDATIONS

The Commscope sector mounts, Part# MTC3975083 has sufficient capacity to carry the proposed loads and is in compliance with the ANSI/TIA-222-H standard for the proposed loading. (Refer to the RISA output for the specific members).

APPENDIX A



(RISA-3D Output)

ASCE 7 Hazards Report

Address:
No Address at This Location

Standard: ASCE/SEI 7-16
Risk Category: II
Soil Class: D - Default (see Section 11.4.3)

Elevation: 244.49 ft (NAVD 88)
Latitude: 41.353164
Longitude: -72.688252

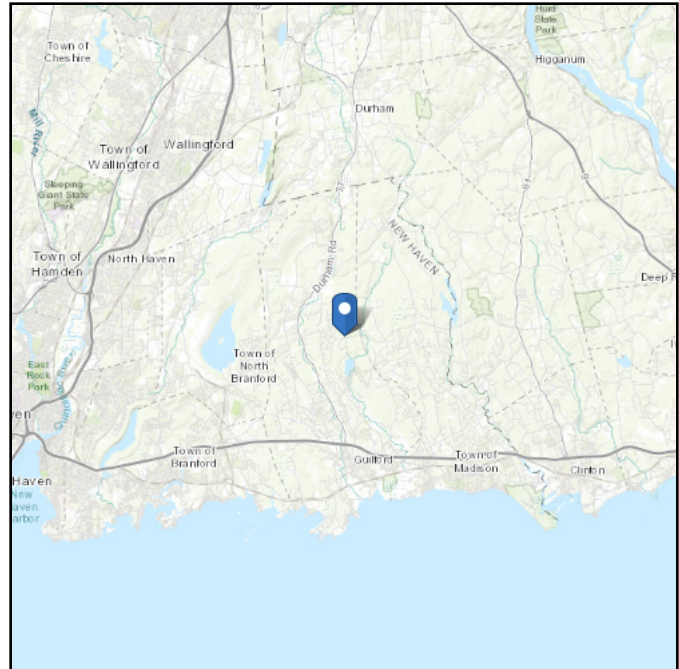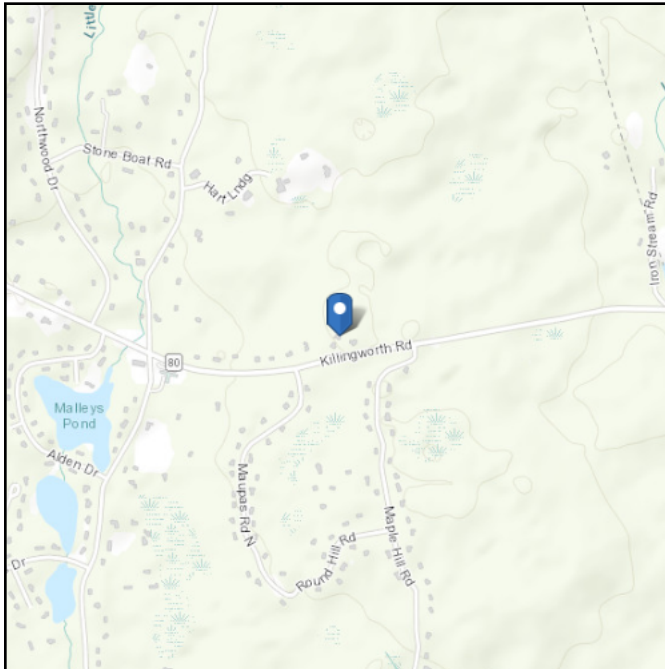

Wind

Results:

Wind Speed	122 Vmph
10-year MRI	75 Vmph
25-year MRI	85 Vmph
50-year MRI	93 Vmph
100-year MRI	99 Vmph

Data Source: ASCE/SEI 7-16, Fig. 26.5-1B and Figs. CC.2-1–CC.2-4, and Section 26.5.2
Date Accessed: Fri Jun 17 2022

Value provided is 3-second gust wind speeds at 33 ft above ground for Exposure C Category, based on linear interpolation between contours. Wind speeds are interpolated in accordance with the 7-16 Standard. Wind speeds correspond to approximately a 7% probability of exceedance in 50 years (annual exceedance probability = 0.00143, MRI = 700 years).





Site is in a hurricane-prone region as defined in ASCE/SEI 7-16 Section 26.2. Glazed openings need not be protected against wind-borne debris.

Site Soil Class: D - Default (see Section 11.4.3)

Results:

S_s :	0.208	S_{D1} :	0.087
S_1 :	0.054	T_L :	6
F_a :	1.6	PGA :	0.116
F_v :	2.4	PGA _M :	0.182
S_{MS} :	0.332	F_{PGA} :	1.567
S_{M1} :	0.13	I_e :	1
S_{DS} :	0.222	C_v :	0.716

Seismic Design Category B

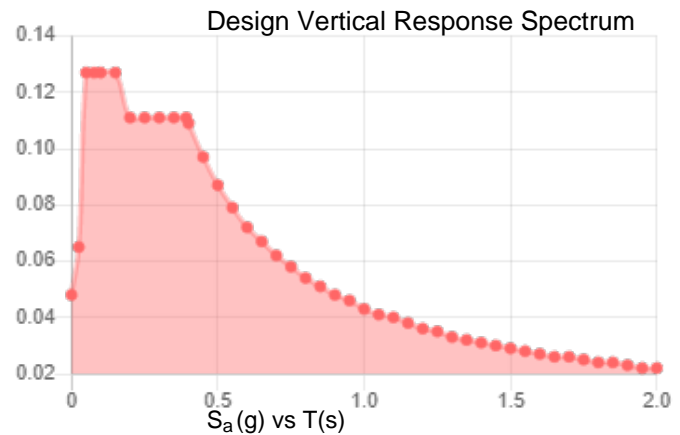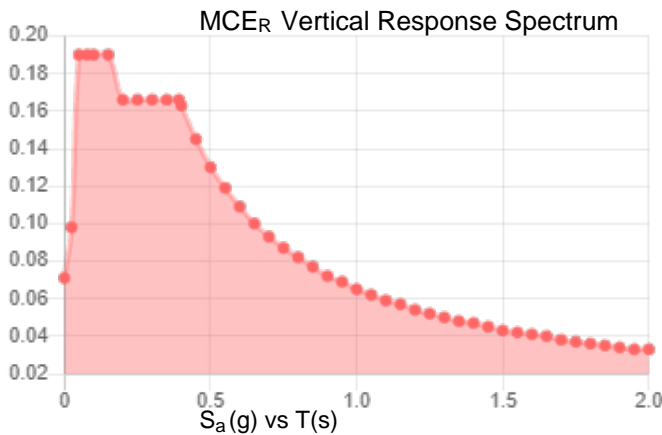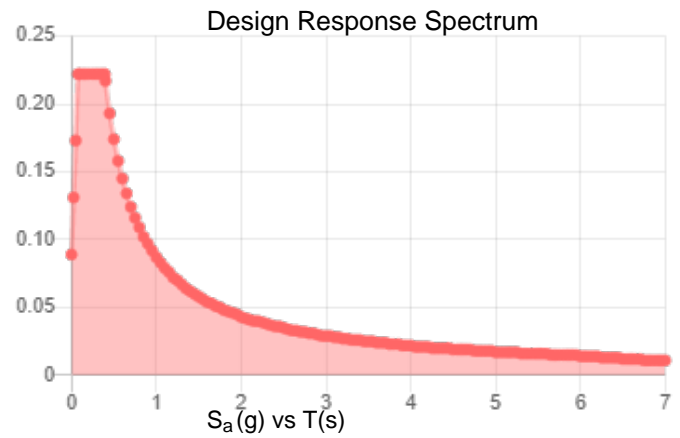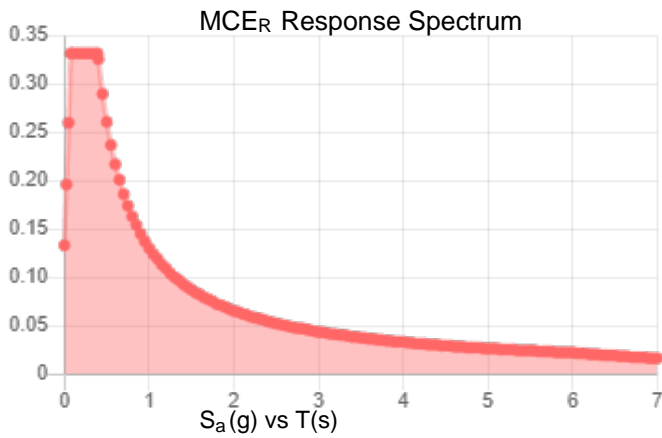

Data Accessed: Fri Jun 17 2022

Date Source:

USGS Seismic Design Maps based on ASCE/SEI 7-16 and ASCE/SEI 7-16 Table 1.5-2. Additional data for site-specific ground motion procedures in accordance with ASCE/SEI 7-16 Ch. 21 are available from USGS.

Ice

Results:

Ice Thickness: 1.00 in.

Concurrent Temperature: 15 F

Gust Speed 50 mph

Data Source: Standard ASCE/SEI 7-16, Figs. 10-2 through 10-8

Date Accessed: Fri Jun 17 2022

Ice thicknesses on structures in exposed locations at elevations higher than the surrounding terrain and in valleys and gorges may exceed the mapped values.

Values provided are equivalent radial ice thicknesses due to freezing rain with concurrent 3-second gust speeds, for a 500-year mean recurrence interval, and temperatures concurrent with ice thicknesses due to freezing rain. Thicknesses for ice accretions caused by other sources shall be obtained from local meteorological studies. Ice thicknesses in exposed locations at elevations higher than the surrounding terrain and in valleys and gorges may exceed the mapped values.

The ASCE 7 Hazard Tool is provided for your convenience, for informational purposes only, and is provided “as is” and without warranties of any kind. The location data included herein has been obtained from information developed, produced, and maintained by third party providers; or has been extrapolated from maps incorporated in the ASCE 7 standard. While ASCE has made every effort to use data obtained from reliable sources or methodologies, ASCE does not make any representations or warranties as to the accuracy, completeness, reliability, currency, or quality of any data provided herein. Any third-party links provided by this Tool should not be construed as an endorsement, affiliation, relationship, or sponsorship of such third-party content by or from ASCE.

ASCE does not intend, nor should anyone interpret, the results provided by this Tool to replace the sound judgment of a competent professional, having knowledge and experience in the appropriate field(s) of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the contents of this Tool or the ASCE 7 standard.


In using this Tool, you expressly assume all risks associated with your use. Under no circumstances shall ASCE or its officers, directors, employees, members, affiliates, or agents be liable to you or any other person for any direct, indirect, special, incidental, or consequential damages arising from or related to your use of, or reliance on, the Tool or any information obtained therein. To the fullest extent permitted by law, you agree to release and hold harmless ASCE from any and all liability of any nature arising out of or resulting from any use of data provided by the ASCE 7 Hazard Tool.

PROJECT	149543.003.01 - Guilford, CT	KSC
SUBJECT	Sector Mount Analysis	
DATE	06/20/22	



B+T Group
1717 S. Boulder, Suite 300
Tulsa, OK 74119
(918) 587-4630

Tower Type	:	SST		
Ground Elevation	z_s	: 244	ft	[ASCE7 Hazard Tool]
Tower Height	:	152.00	ft	
Mount Elevation	:	105.00	ft	
Antenna Elevation	:	105.00	ft	
Crest Height	:	0	ft	
Risk Category	:	II		[Table 2-1]
Exposure Category	:	B		[Sec. 2.6.5.1.2]
Topography Category	:	1.00		[Sec. 2.6.6.2]
Wind Velocity	V	: 122	mph	[ASCE7 Hazard Tool]
Ice wind Velocity	V_i	: 50	mph	[ASCE7 Hazard Tool]
Service Velocity	V_s	: 30	mph	[ASCE7 Hazard Tool]
Base Ice thickness	t_i	: 1.00	in	[ASCE7 Hazard Tool]
Seismic Design Cat.	:	B		[ASCE7 Hazard Tool]
	S_S	: 0.21		
	S_1	: 0.05		
	S_{DS}	: 0.22		
	S_{D1}	: 0.09		
Gust Factor	G_h	: 1.00		[Sec. 16.6]
Pressure Coefficient	K_z	: 1.00		[Sec. 2.6.5.2]
Topography Facto	K_{zt}	: 1.00		[Sec. 2.6.6]
Elevation Factor	K_e	: 0.99		[Sec. 2.6.8]
Directionality Factor	K_d	: 0.95		[Sec. 16.6]
Shielding Factor	K_a	: 0.90		[Sec. 16.6]
Design Ice Thickness	t_{iz}	: 1.12	in	[Sec. 2.6.10]
Importance Factor	I_e	: 1		[Table 2-3]
Response Coefficient	C_s	: 0.111		[Sec. 2.7.7.1]
Amplification	A_s	: 1.763158		[Sec. 16.7]
	q_z	: 35.95	psf	

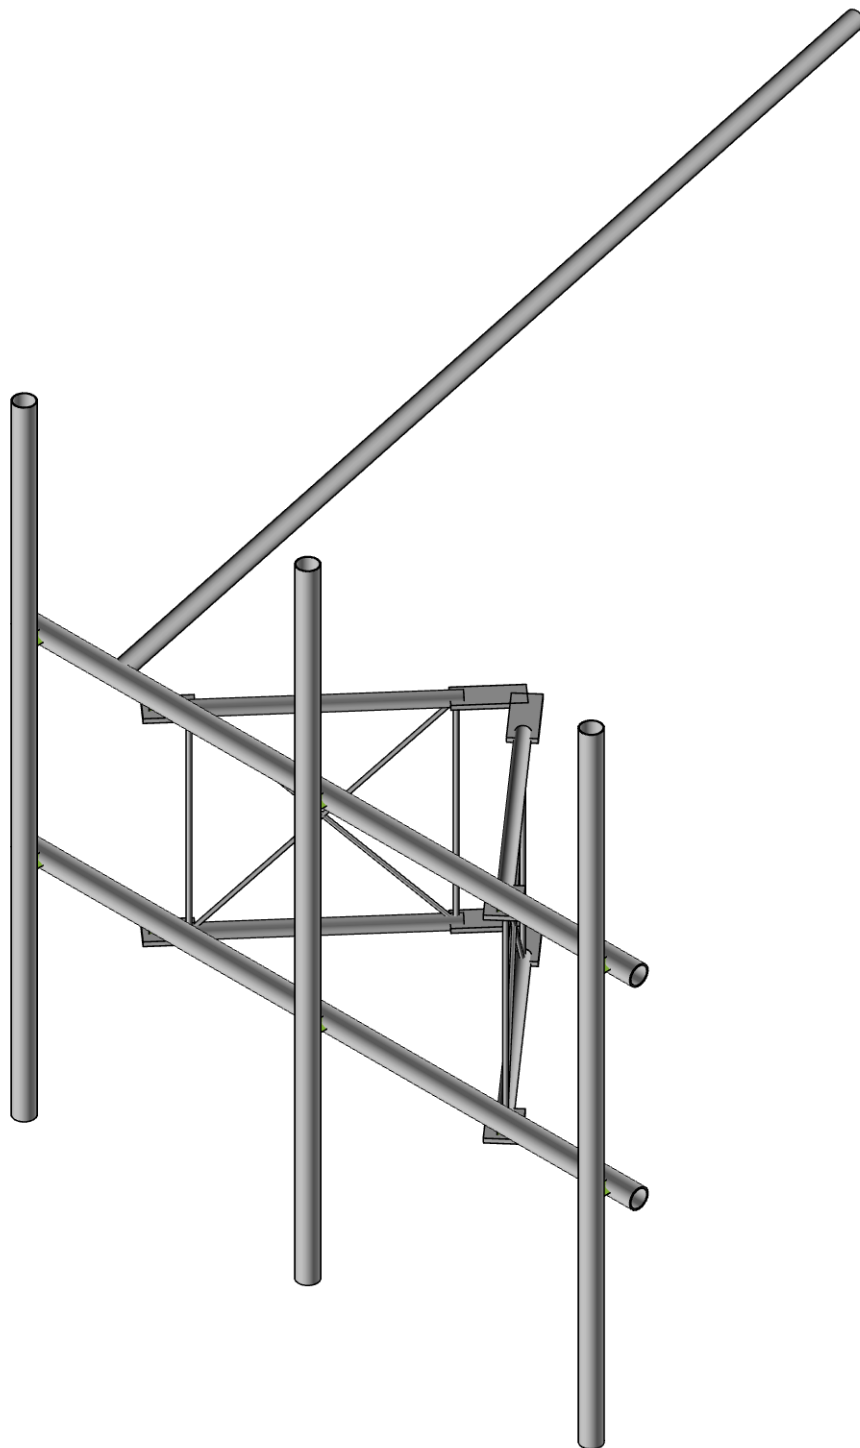

Envelope Only Solution

MTS Engineering, P.L.L.C.

GRG


149543.003.01

CT13065-A - Guilford

GRG-1

Jun 18, 2022

149543_003_01_Guilford_CT.r3d

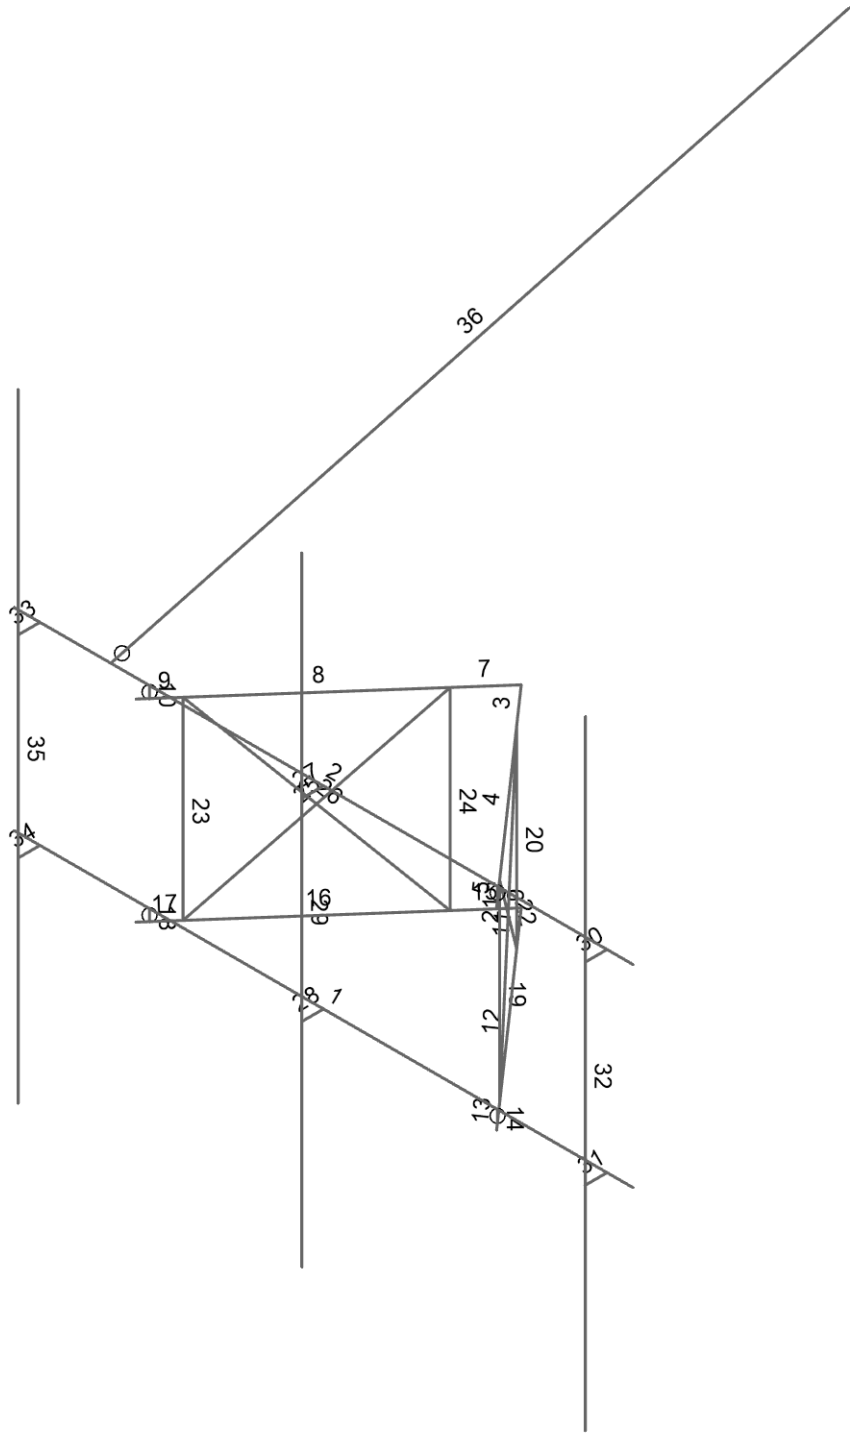

Envelope Only Solution



MTS Engineering, P.L.L.C.
 GRG
 149543.003.01

CT13065-A - Guilford

GRG-2

Jun 18, 2022

149543_003_01_Guilford_CT.r3d

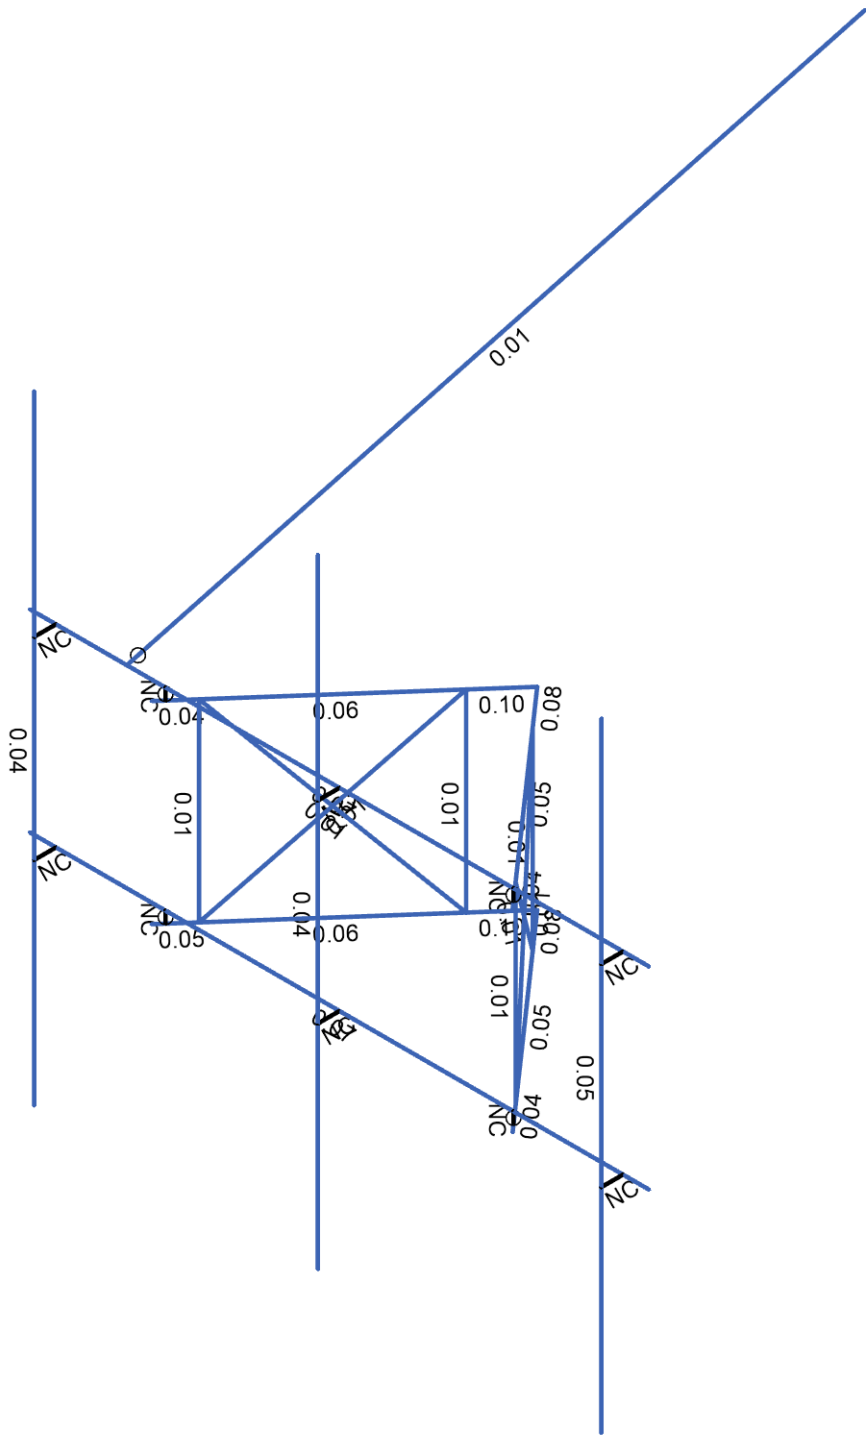

Member Shear Checks Displayed (Enveloped)
Envelope Only Solution

MTS Engineering, P.L.L.C.
GRG
149543.003.01

CT13065-A - Guilford

GRG-5
Jun 18, 2022
149543_003_01_Guilford_CT.r3d



Company : MTS Engineering, P.L.L.C.
 Designer : GRG
 Job Number : 149543.003.01
 Model Name : CT13065-A - Guilford

6/18/2022
 7:32:06 PM
 Checked By : _____

Node Coordinates

	Label	X [ft]	Y [ft]	Z [ft]	Detach From Diaphragm
1	1	-4	-2.354167	2.796875	
2	2	4	-2.354167	2.796875	
3	3	-4	0.145833	2.796875	
4	4	4	0.145833	2.796875	
5	5	0.467947	0	0.771833	
6	6	0.385368	0	0.677994	
7	7	2.091999	0	2.61733	
8	8	2.00942	0	2.523491	
9	9	2.332579	0	2.890714	
10	10	2.25	0.145833	2.796875	
11	11	2.25	0	2.796875	
12	12	0	0	0.24008	
13	13	-0.467947	0	0.771833	
14	14	-0.385368	0	0.677994	
15	15	-2.091999	0	2.61733	
16	16	-2.00942	0	2.523491	
17	17	-2.332579	0	2.890714	
18	18	-2.25	0.145833	2.796875	
19	19	-2.25	0	2.796875	
20	20	0.467947	-2.5	0.771833	
21	21	0.385368	-2.5	0.677994	
22	22	2.091999	-2.5	2.61733	
23	23	2.00942	-2.5	2.523491	
24	24	2.332579	-2.5	2.890714	
25	25	2.25	-2.354167	2.796875	
26	26	2.25	-2.5	2.796875	
27	27	0	-2.5	0.24008	
28	28	-0.467947	-2.5	0.771833	
29	29	-0.385368	-2.5	0.677994	
30	30	-2.091999	-2.5	2.61733	
31	31	-2.00942	-2.5	2.523491	
32	32	-2.332579	-2.5	2.890714	
33	33	-2.25	-2.354167	2.796875	
34	34	-2.25	-2.5	2.796875	
35	35	0.430236	0	0.72898	
36	36	2.047131	-2.5	2.566344	
37	37	2.047131	0	2.566344	
38	38	0.430236	-2.5	0.72898	
39	39	-0.430236	0	0.72898	
40	40	-2.047131	-2.5	2.566344	
41	41	-2.047131	0	2.566344	
42	42	-0.430236	-2.5	0.72898	
43	43	0	0.145833	2.796875	
44	44	0	0.145833	3.078125	
45	45	0	-2.354167	2.796875	
46	46	0	-2.354167	3.078125	
47	47	0	2.895833	3.078125	
48	48	0	-5.104167	3.078125	
49	49	3.666667	0.145833	2.796875	
50	50	3.666667	0.145833	3.078125	
51	51	3.666667	-2.354167	2.796875	
52	52	3.666667	-2.354167	3.078125	
53	53	3.666667	2.895833	3.078125	
54	54	3.666667	-5.104167	3.078125	
55	55	-3.666667	0.145833	2.796875	

Node Coordinates (Continued)

	Label	X [ft]	Y [ft]	Z [ft]	Detach From Diaphragm
56	56	-3.666667	0.145833	3.078125	
57	57	-3.666667	-2.354167	2.796875	
58	58	-3.666667	-2.354167	3.078125	
59	59	-3.666667	2.895833	3.078125	
60	60	-3.666667	-5.104167	3.078125	
61	61	0	0	0	
62	62	-2.75	0.145833	2.796875	
63	63	5.464671	0	-9.465088	
64	64	-5.464671	0	-9.465088	

Node Boundary Conditions

	Node Label	X [k/in]	Y [k/in]	Z [k/in]
1	12	Reaction	Reaction	Reaction
2	27	Reaction	Reaction	Reaction
3	64	Reaction	Reaction	Reaction

Hot Rolled Steel Properties

	Label	E [ksi]	G [ksi]	Nu	Therm. Coeff. [1e ⁻⁵ F ⁻¹]	Density [k/ft ³]	Yield [ksi]	Ry	Fu [ksi]	Rt
1	A992	29000	11154	0.3	0.65	0.49	50	1.1	65	1.1
2	A36 Gr.36	29000	11154	0.3	0.65	0.49	36	1.5	58	1.2
3	A572 Gr.50	29000	11154	0.3	0.65	0.49	50	1.1	65	1.1
4	A500 Gr.B RND	29000	11154	0.3	0.65	0.527	42	1.4	58	1.3
5	A500 Gr.B Rect	29000	11154	0.3	0.65	0.527	46	1.4	58	1.3
6	A53 Gr.B	29000	11154	0.3	0.65	0.49	35	1.6	60	1.2
7	A1085	29000	11154	0.3	0.65	0.49	50	1.4	65	1.3
8	A529 Gr.50	29000	11154	0.3	0.65	0.49	50	1.1	65	1.1
9	A500 Gr.42	29000	11154	0.3	0.65	0.49	42	1.4	58	1.3
10	A500 Gr.46	29000	11154	0.3	0.65	0.49	46	1.4	58	1.3
11	A500 Gr.C	29000	11154	0.3	0.65	0.49	46	1.4	62	1.3

Hot Rolled Steel Section Sets

	Label	Shape	Type	Design List	Material	Design Rule	Area [in ²]	Iyy [in ⁴]	Izz [in ⁴]	J [in ⁴]
1	MF-H1	PIPE 2.88X0.203	Beam	Pipe	A500 Gr.C	Typical	1.704	1.53	1.53	3.059
2	MF- SA1	1.9"ODX0.12"	Beam	Pipe	A500 Gr.B RND	Typical	0.671	0.267	0.267	0.534
3	MF-D1	1/2"SR	VBrace	BAR	A529 Gr.50	Typical	0.196	0.003	0.003	0.006
4	MF-CP1	PL5/8X3.5	Beam	RECT	A572 Gr.50	Typical	2.188	0.071	2.233	0.253
5	MF-V1	0.63"SR	Column	BAR	A529 Gr.50	Typical	0.312	0.008	0.008	0.015
6	MF-CP2	PL5/8X4.25	Beam	RECT	A572 Gr.50	Typical	2.656	0.086	3.998	0.314
7	Tieback	PIPE2.38X0.12	Beam	Pipe	A500 Gr.C	Typical	0.852	0.545	0.545	1.091
8	MF-P1	PIPE2.88X.12	Column	Pipe	A500 Gr.C	Typical	1.04	0.993	0.993	1.985

Member Primary Data

	Label	I Node	J Node	Rotate(deg)	Section/Shape	Type	Design List	Material	Design Rule
1	1	1	2		MF-H1	Beam	Pipe	A500 Gr.C	Typical
2	2	3	4		MF-H1	Beam	Pipe	A500 Gr.C	Typical
3	3	12	5	90	MF-CP1	Beam	RECT	A572 Gr.50	Typical
4	4	6	7		MF- SA1	Beam	Pipe	A500 Gr.B RND	Typical
5	5	8	9	90	MF-CP2	Beam	RECT	A572 Gr.50	Typical
6	6	10	11	90	RIGID	None	None	RIGID	Typical
7	7	12	13	90	MF-CP1	Beam	RECT	A572 Gr.50	Typical



Member Primary Data (Continued)

	Label	I Node	J Node	Rotate(deg)	Section/Shape	Type	Design List	Material	Design Rule
8	8	14	15		MF- SA1	Beam	Pipe	A500 Gr.B RND	Typical
9	9	16	17	90	MF-CP2	Beam	RECT	A572 Gr.50	Typical
10	10	18	19	90	RIGID	None	None	RIGID	Typical
11	11	27	20	90	MF-CP1	Beam	RECT	A572 Gr.50	Typical
12	12	21	22		MF- SA1	Beam	Pipe	A500 Gr.B RND	Typical
13	13	23	24	90	MF-CP2	Beam	RECT	A572 Gr.50	Typical
14	14	25	26	90	RIGID	None	None	RIGID	Typical
15	15	27	28	90	MF-CP1	Beam	RECT	A572 Gr.50	Typical
16	16	29	30		MF- SA1	Beam	Pipe	A500 Gr.B RND	Typical
17	17	31	32	90	MF-CP2	Beam	RECT	A572 Gr.50	Typical
18	18	33	34	90	RIGID	None	None	RIGID	Typical
19	19	37	36		MF-V1	Column	BAR	A529 Gr.50	Typical
20	20	35	38		MF-V1	Column	BAR	A529 Gr.50	Typical
21	21	35	36		MF-D1	VBrace	BAR	A529 Gr.50	Typical
22	22	37	38		MF-D1	VBrace	BAR	A529 Gr.50	Typical
23	23	41	40		MF-V1	Column	BAR	A529 Gr.50	Typical
24	24	39	42		MF-V1	Column	BAR	A529 Gr.50	Typical
25	25	39	40		MF-D1	VBrace	BAR	A529 Gr.50	Typical
26	26	41	42		MF-D1	VBrace	BAR	A529 Gr.50	Typical
27	27	43	44	90	RIGID	None	None	RIGID	Typical
28	28	45	46	90	RIGID	None	None	RIGID	Typical
29	29	47	48		MF-P1	Column	Pipe	A500 Gr.C	Typical
30	30	49	50	90	RIGID	None	None	RIGID	Typical
31	31	51	52	90	RIGID	None	None	RIGID	Typical
32	32	53	54		MF-P1	Column	Pipe	A500 Gr.C	Typical
33	33	55	56	90	RIGID	None	None	RIGID	Typical
34	34	57	58	90	RIGID	None	None	RIGID	Typical
35	35	59	60		MF-P1	Column	Pipe	A500 Gr.C	Typical
36	36	62	64		Tieback	Beam	Pipe	A500 Gr.C	Typical

Member Advanced Data

	Label	I Release	T/C Only	Physical	Deflection Ratio Options	Seismic DR
1	1			Yes	N/A	None
2	2			Yes	Default	None
3	3			Yes	N/A	None
4	4			Yes	N/A	None
5	5			Yes	N/A	None
6	6	OOOOXO		Yes	** NA **	None
7	7			Yes	N/A	None
8	8			Yes	N/A	None
9	9			Yes	N/A	None
10	10	OOOOXO		Yes	** NA **	None
11	11			Yes	N/A	None
12	12			Yes	N/A	None
13	13			Yes	N/A	None
14	14	OOOOXO		Yes	** NA **	None
15	15			Yes	N/A	None
16	16			Yes	N/A	None
17	17			Yes	N/A	None
18	18	OOOOXO		Yes	** NA **	None
19	19			Yes	** NA **	None
20	20			Yes	** NA **	None
21	21			Yes	** NA **	None
22	22		Euler Buckling	Yes	** NA **	None
23	23			Yes	** NA **	None

Member Advanced Data (Continued)

	Label	I Release	T/C Only	Physical	Deflection Ratio Options	Seismic DR
24	24			Yes	** NA **	None
25	25			Yes	** NA **	None
26	26		Euler Buckling	Yes	** NA **	None
27	27			Yes	** NA **	None
28	28			Yes	** NA **	None
29	29			Yes	** NA **	None
30	30			Yes	** NA **	None
31	31			Yes	** NA **	None
32	32			Yes	** NA **	None
33	33			Yes	** NA **	None
34	34			Yes	** NA **	None
35	35			Yes	** NA **	None
36	36	BenPIN		Yes	Default	None

Hot Rolled Steel Design Parameters

	Label	Shape	Length [ft]	Lcomp top [ft]	Channel Conn.	a [ft]	Function
1	1	MF-H1	8	Lbyy	N/A	N/A	Lateral
2	2	MF-H1	8	Lbyy	N/A	N/A	Lateral
3	3	MF-CP1	0.708	Lbyy	N/A	N/A	Lateral
4	4	MF-SA1	2.583	Lbyy	N/A	N/A	Lateral
5	5	MF-CP2	0.489	Lbyy	N/A	N/A	Lateral
6	7	MF-CP1	0.708	Lbyy	N/A	N/A	Lateral
7	8	MF-SA1	2.583	Lbyy	N/A	N/A	Lateral
8	9	MF-CP2	0.489	Lbyy	N/A	N/A	Lateral
9	11	MF-CP1	0.708	Lbyy	N/A	N/A	Lateral
10	12	MF-SA1	2.583	Lbyy	N/A	N/A	Lateral
11	13	MF-CP2	0.489	Lbyy	N/A	N/A	Lateral
12	15	MF-CP1	0.708	Lbyy	N/A	N/A	Lateral
13	16	MF-SA1	2.583	Lbyy	N/A	N/A	Lateral
14	17	MF-CP2	0.489	Lbyy	N/A	N/A	Lateral
15	19	MF-V1	2.5	Lbyy	N/A	N/A	Lateral
16	20	MF-V1	2.5	Lbyy	N/A	N/A	Lateral
17	21	MF-D1	3.499	Lbyy	N/A	N/A	Lateral
18	22	MF-D1	3.499	Lbyy	N/A	N/A	Lateral
19	23	MF-V1	2.5	Lbyy	N/A	N/A	Lateral
20	24	MF-V1	2.5	Lbyy	N/A	N/A	Lateral
21	25	MF-D1	3.499	Lbyy	N/A	N/A	Lateral
22	26	MF-D1	3.499	Lbyy	N/A	N/A	Lateral
23	29	MF-P1	8	Lbyy	N/A	N/A	Lateral
24	32	MF-P1	8	Lbyy	N/A	N/A	Lateral
25	35	MF-P1	8	Lbyy	N/A	N/A	Lateral
26	36	Tieback	12.56	Lbyy	N/A	N/A	Lateral

Member Point Loads (BLC 1 : Dead)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	32	Y	-0.032	%15
2	32	Y	-0.032	%85
3	32	Y	-0.064	%20
4	32	Y	-0.075	%50
5	32	Y	0	0
6	8	Y	-0.022	%50
7	8	Y	0	0
8	8	Y	0	0

Member Point Loads (BLC 1 : Dead) (Continued)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
9	8	Y	0	0
10	8	Y	0	0

Member Point Loads (BLC 2 : 0 Wind - No Ice)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	32	Z	-0.202	%15
2	32	Z	-0.202	%85
3	32	Z	-0.064	%20
4	32	Z	-0.064	%50
5	32	Z	0	0
6	8	Z	-0.065	%50
7	8	Z	0	0
8	8	Z	0	0
9	8	Z	0	0
10	8	Z	0	0

Member Point Loads (BLC 3 : 90 Wind - No Ice)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	32	X	-0.081	%15
2	32	X	-0.081	%85
3	32	X	-0.033	%20
4	32	X	-0.038	%50
5	32	X	0	0
6	8	X	-0.036	%50
7	8	X	0	0
8	8	X	0	0
9	8	X	0	0
10	8	X	0	0

Member Point Loads (BLC 4 : 0 Wind - Ice)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	32	Z	-0.034	%15
2	32	Z	-0.034	%85
3	32	Z	-0.011	%20
4	32	Z	-0.011	%50
5	32	Z	0	0
6	8	Z	-0.011	%50
7	8	Z	0	0
8	8	Z	0	0
9	8	Z	0	0
10	8	Z	0	0

Member Point Loads (BLC 5 : 90 Wind - Ice)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	32	X	-0.014	%15
2	32	X	-0.014	%85
3	32	X	-0.006	%20
4	32	X	-0.006	%50
5	32	X	0	0
6	8	X	-0.006	%50



Member Point Loads (BLC 5 : 90 Wind - Ice) (Continued)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
7	8	X	0	0
8	8	X	0	0
9	8	X	0	0
10	8	X	0	0

Member Point Loads (BLC 6 : 0 Wind - Service)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	32	Z	-0.012	%15
2	32	Z	-0.012	%85
3	32	Z	-0.004	%20
4	32	Z	-0.004	%50
5	32	Z	0	0
6	8	Z	-0.004	%50
7	8	Z	0	0
8	8	Z	0	0
9	8	Z	0	0
10	8	Z	0	0

Member Point Loads (BLC 7 : 90 Wind - Service)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	32	X	-0.005	%15
2	32	X	-0.005	%85
3	32	X	-0.002	%20
4	32	X	-0.002	%50
5	32	X	0	0
6	8	X	-0.002	%50
7	8	X	0	0
8	8	X	0	0
9	8	X	0	0
10	8	X	0	0

Member Point Loads (BLC 8 : Ice)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	32	Y	-0.093	%15
2	32	Y	-0.093	%85
3	32	Y	-0.032	%20
4	32	Y	-0.034	%50
5	32	Y	0	0
6	8	Y	-0.034	%50
7	8	Y	0	0
8	8	Y	0	0
9	8	Y	0	0
10	8	Y	0	0

Member Point Loads (BLC 9 : 0 Seismic)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	32	Z	-0.013	%15
2	32	Z	-0.013	%85
3	32	Z	-0.013	%20
4	32	Z	-0.015	%50

Member Point Loads (BLC 9 : 0 Seismic) (Continued)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
5	32	Z	0	0
6	8	Z	-0.004	%50
7	8	Z	0	0
8	8	Z	0	0
9	8	Z	0	0
10	8	Z	0	0

Member Point Loads (BLC 10 : 90 Seismic)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	32	X	-0.013	%15
2	32	X	-0.013	%85
3	32	X	-0.013	%20
4	32	X	-0.015	%50
5	32	X	0	0
6	8	X	-0.004	%50
7	8	X	0	0
8	8	X	0	0
9	8	X	0	0
10	8	X	0	0

Member Point Loads (BLC 15 : Maint LL 1)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	16	Y	-0.25	%50

Member Point Loads (BLC 16 : Maint LL 2)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	8	Y	-0.25	%50

Member Point Loads (BLC 17 : Maint LL 3)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	12	Y	-0.25	%50

Member Point Loads (BLC 18 : Maint LL 4)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	4	Y	-0.25	%50

Member Point Loads (BLC 19 : Maint LL 5)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	1	Y	-0.25	%95

Member Point Loads (BLC 20 : Maint LL 6)

	Member Label	Direction	Magnitude [k, k-ft]	Location [(ft, %)]
1	2	Y	-0.25	%95



Company : MTS Engineering, P.L.L.C.
 Designer : GRG
 Job Number : 149543.003.01
 Model Name : CT13065-A - Guilford

6/18/2022
 7:32:06 PM
 Checked By : _____

Member Distributed Loads (BLC 2 : 0 Wind - No Ice)

Member	Label	Direction	Start Magnitude [k/ft, F, ksf, k-ft/ft]	End Magnitude [k/ft, F, ksf, k-ft/ft]	Start Location [(ft, %)]	End Location [(ft, %)]
1	1	Z	-0.009	-0.009	0	%100
2	2	Z	-0.009	-0.009	0	%100
3	3	Z	-0.003	-0.003	0	%100
4	4	Z	-0.005	-0.005	0	%100
5	5	Z	-0.002	-0.002	0	%100
6	7	Z	-0.003	-0.003	0	%100
7	8	Z	-0.005	-0.005	0	%100
8	9	Z	-0.002	-0.002	0	%100
9	11	Z	-0.003	-0.003	0	%100
10	12	Z	-0.005	-0.005	0	%100
11	13	Z	-0.002	-0.002	0	%100
12	15	Z	-0.003	-0.003	0	%100
13	16	Z	-0.005	-0.005	0	%100
14	17	Z	-0.002	-0.002	0	%100
15	19	Z	-0.002	-0.002	0	%100
16	20	Z	-0.002	-0.002	0	%100
17	21	Z	-0.002	-0.002	0	%100
18	22	Z	-0.002	-0.002	0	%100
19	23	Z	-0.002	-0.002	0	%100
20	24	Z	-0.002	-0.002	0	%100
21	25	Z	-0.002	-0.002	0	%100
22	26	Z	-0.002	-0.002	0	%100
23	29	Z	-0.009	-0.009	0	%100
24	32	Z	-0.009	-0.009	0	%100
25	35	Z	-0.009	-0.009	0	%100
26	36	Z	-0.008	-0.008	0	%100

Member Distributed Loads (BLC 3 : 90 Wind - No Ice)

Member	Label	Direction	Start Magnitude [k/ft, F, ksf, k-ft/ft]	End Magnitude [k/ft, F, ksf, k-ft/ft]	Start Location [(ft, %)]	End Location [(ft, %)]
1	1	X	-0.009	-0.009	0	%100
2	2	X	-0.009	-0.009	0	%100
3	3	X	-0.003	-0.003	0	%100
4	4	X	-0.005	-0.005	0	%100
5	5	X	-0.002	-0.002	0	%100
6	7	X	-0.003	-0.003	0	%100
7	8	X	-0.005	-0.005	0	%100
8	9	X	-0.002	-0.002	0	%100
9	11	X	-0.003	-0.003	0	%100
10	12	X	-0.005	-0.005	0	%100
11	13	X	-0.002	-0.002	0	%100
12	15	X	-0.003	-0.003	0	%100
13	16	X	-0.005	-0.005	0	%100
14	17	X	-0.002	-0.002	0	%100
15	19	X	-0.002	-0.002	0	%100
16	20	X	-0.002	-0.002	0	%100
17	21	X	-0.002	-0.002	0	%100
18	22	X	-0.002	-0.002	0	%100
19	23	X	-0.002	-0.002	0	%100
20	24	X	-0.002	-0.002	0	%100
21	25	X	-0.002	-0.002	0	%100
22	26	X	-0.002	-0.002	0	%100
23	29	X	-0.009	-0.009	0	%100
24	32	X	-0.009	-0.009	0	%100
25	35	X	-0.009	-0.009	0	%100



Company : MTS Engineering, P.L.L.C.
 Designer : GRG
 Job Number : 149543.003.01
 Model Name : CT13065-A - Guilford

6/18/2022
 7:32:06 PM
 Checked By : _____

Member Distributed Loads (BLC 3 : 90 Wind - No Ice) (Continued)

Member	Label	Direction	Start Magnitude [k/ft, F, ksf, k-ft/ft]	End Magnitude [k/ft, F, ksf, k-ft/ft]	Start Location [(ft, %)]	End Location [(ft, %)]
26	36	X	-0.008	-0.008	0	%100

Member Distributed Loads (BLC 4 : 0 Wind - Ice)

Member	Label	Direction	Start Magnitude [k/ft, F, ksf, k-ft/ft]	End Magnitude [k/ft, F, ksf, k-ft/ft]	Start Location [(ft, %)]	End Location [(ft, %)]
1	1	Z	-0.001	-0.001	0	%100
2	2	Z	-0.001	-0.001	0	%100
3	3	Z	-0.003	-0.003	0	%100
4	4	Z	-0.001	-0.001	0	%100
5	5	Z	-0.003	-0.003	0	%100
6	7	Z	-0.003	-0.003	0	%100
7	8	Z	-0.001	-0.001	0	%100
8	9	Z	-0.003	-0.003	0	%100
9	11	Z	-0.003	-0.003	0	%100
10	12	Z	-0.001	-0.001	0	%100
11	13	Z	-0.003	-0.003	0	%100
12	15	Z	-0.003	-0.003	0	%100
13	16	Z	-0.001	-0.001	0	%100
14	17	Z	-0.003	-0.003	0	%100
15	19	Z	-0.002	-0.002	0	%100
16	20	Z	-0.002	-0.002	0	%100
17	21	Z	-0.002	-0.002	0	%100
18	22	Z	-0.002	-0.002	0	%100
19	23	Z	-0.002	-0.002	0	%100
20	24	Z	-0.002	-0.002	0	%100
21	25	Z	-0.002	-0.002	0	%100
22	26	Z	-0.002	-0.002	0	%100
23	29	Z	-0.001	-0.001	0	%100
24	32	Z	-0.001	-0.001	0	%100
25	35	Z	-0.001	-0.001	0	%100
26	36	Z	-0.001	-0.001	0	%100

Member Distributed Loads (BLC 5 : 90 Wind - Ice)

Member	Label	Direction	Start Magnitude [k/ft, F, ksf, k-ft/ft]	End Magnitude [k/ft, F, ksf, k-ft/ft]	Start Location [(ft, %)]	End Location [(ft, %)]
1	1	X	-0.001	-0.001	0	%100
2	2	X	-0.001	-0.001	0	%100
3	3	X	-0.003	-0.003	0	%100
4	4	X	-0.001	-0.001	0	%100
5	5	X	-0.003	-0.003	0	%100
6	7	X	-0.003	-0.003	0	%100
7	8	X	-0.001	-0.001	0	%100
8	9	X	-0.003	-0.003	0	%100
9	11	X	-0.003	-0.003	0	%100
10	12	X	-0.001	-0.001	0	%100
11	13	X	-0.003	-0.003	0	%100
12	15	X	-0.003	-0.003	0	%100
13	16	X	-0.001	-0.001	0	%100
14	17	X	-0.003	-0.003	0	%100
15	19	X	-0.002	-0.002	0	%100
16	20	X	-0.002	-0.002	0	%100
17	21	X	-0.002	-0.002	0	%100
18	22	X	-0.002	-0.002	0	%100
19	23	X	-0.002	-0.002	0	%100
20	24	X	-0.002	-0.002	0	%100



Company : MTS Engineering, P.L.L.C.
 Designer : GRG
 Job Number : 149543.003.01
 Model Name : CT13065-A - Guilford

6/18/2022
 7:32:06 PM
 Checked By : _____

Member Distributed Loads (BLC 5 : 90 Wind - Ice) (Continued)

Member	Label	Direction	Start Magnitude [k/ft, F, ksf, k-ft/ft]	End Magnitude [k/ft, F, ksf, k-ft/ft]	Start Location [(ft, %)]	End Location [(ft, %)]
21	25	X	-0.002	-0.002	0	%100
22	26	X	-0.002	-0.002	0	%100
23	29	X	-0.001	-0.001	0	%100
24	32	X	-0.001	-0.001	0	%100
25	35	X	-0.001	-0.001	0	%100
26	36	X	-0.001	-0.001	0	%100

Member Distributed Loads (BLC 6 : 0 Wind - Service)

Member	Label	Direction	Start Magnitude [k/ft, F, ksf, k-ft/ft]	End Magnitude [k/ft, F, ksf, k-ft/ft]	Start Location [(ft, %)]	End Location [(ft, %)]
1	1	Z	-0.0003	-0.0003	0	%100
2	2	Z	-0.0003	-0.0003	0	%100
3	3	Z	-0.0002	-0.0002	0	%100
4	4	Z	-0.0002	-0.0002	0	%100
5	5	Z	-0.0001	-0.0001	0	%100
6	7	Z	-0.0002	-0.0002	0	%100
7	8	Z	-0.0002	-0.0002	0	%100
8	9	Z	-0.0001	-0.0001	0	%100
9	11	Z	-0.0002	-0.0002	0	%100
10	12	Z	-0.0002	-0.0002	0	%100
11	13	Z	-0.0001	-0.0001	0	%100
12	15	Z	-0.0002	-0.0002	0	%100
13	16	Z	-0.0002	-0.0002	0	%100
14	17	Z	-0.0001	-0.0001	0	%100
15	19	Z	-0.0001	-0.0001	0	%100
16	20	Z	-0.0001	-0.0001	0	%100
17	21	Z	-0.0001	-0.0001	0	%100
18	22	Z	-0.0001	-0.0001	0	%100
19	23	Z	-0.0001	-0.0001	0	%100
20	24	Z	-0.0001	-0.0001	0	%100
21	25	Z	-0.0001	-0.0001	0	%100
22	26	Z	-0.0001	-0.0001	0	%100
23	29	Z	-0.0003	-0.0003	0	%100
24	32	Z	-0.0003	-0.0003	0	%100
25	35	Z	-0.0003	-0.0003	0	%100
26	36	Z	-0.0002	-0.0002	0	%100

Member Distributed Loads (BLC 7 : 90 Wind - Service)

Member	Label	Direction	Start Magnitude [k/ft, F, ksf, k-ft/ft]	End Magnitude [k/ft, F, ksf, k-ft/ft]	Start Location [(ft, %)]	End Location [(ft, %)]
1	1	X	-0.0003	-0.0003	0	%100
2	2	X	-0.0003	-0.0003	0	%100
3	3	X	-0.0002	-0.0002	0	%100
4	4	X	-0.0002	-0.0002	0	%100
5	5	X	-0.0001	-0.0001	0	%100
6	7	X	-0.0002	-0.0002	0	%100
7	8	X	-0.0002	-0.0002	0	%100
8	9	X	-0.0001	-0.0001	0	%100
9	11	X	-0.0002	-0.0002	0	%100
10	12	X	-0.0002	-0.0002	0	%100
11	13	X	-0.0001	-0.0001	0	%100
12	15	X	-0.0002	-0.0002	0	%100
13	16	X	-0.0002	-0.0002	0	%100
14	17	X	-0.0001	-0.0001	0	%100
15	19	X	-0.0001	-0.0001	0	%100



Member Distributed Loads (BLC 7 : 90 Wind - Service) (Continued)

Member	Label	Direction	Start Magnitude [k/ft, F, ksf, k-ft/ft]	End Magnitude [k/ft, F, ksf, k-ft/ft]	Start Location [(ft, %)]	End Location [(ft, %)]
16	20	X	-0.0001	-0.0001	0	%100
17	21	X	-0.0001	-0.0001	0	%100
18	22	X	-0.0001	-0.0001	0	%100
19	23	X	-0.0001	-0.0001	0	%100
20	24	X	-0.0001	-0.0001	0	%100
21	25	X	-0.0001	-0.0001	0	%100
22	26	X	-0.0001	-0.0001	0	%100
23	29	X	-0.0003	-0.0003	0	%100
24	32	X	-0.0003	-0.0003	0	%100
25	35	X	-0.0003	-0.0003	0	%100
26	36	X	-0.0002	-0.0002	0	%100

Member Distributed Loads (BLC 8 : Ice)

Member	Label	Direction	Start Magnitude [k/ft, F, ksf, k-ft/ft]	End Magnitude [k/ft, F, ksf, k-ft/ft]	Start Location [(ft, %)]	End Location [(ft, %)]
1	1	Y	-0.005	-0.005	0	%100
2	2	Y	-0.005	-0.005	0	%100
3	3	Y	-0.011	-0.011	0	%100
4	4	Y	-0.004	-0.004	0	%100
5	5	Y	-0.013	-0.013	0	%100
6	7	Y	-0.011	-0.011	0	%100
7	8	Y	-0.004	-0.004	0	%100
8	9	Y	-0.013	-0.013	0	%100
9	11	Y	-0.011	-0.011	0	%100
10	12	Y	-0.004	-0.004	0	%100
11	13	Y	-0.013	-0.013	0	%100
12	15	Y	-0.011	-0.011	0	%100
13	16	Y	-0.004	-0.004	0	%100
14	17	Y	-0.013	-0.013	0	%100
15	19	Y	-0.002	-0.002	0	%100
16	20	Y	-0.002	-0.002	0	%100
17	21	Y	-0.002	-0.002	0	%100
18	22	Y	-0.002	-0.002	0	%100
19	23	Y	-0.002	-0.002	0	%100
20	24	Y	-0.002	-0.002	0	%100
21	25	Y	-0.002	-0.002	0	%100
22	26	Y	-0.002	-0.002	0	%100
23	29	Y	-0.005	-0.005	0	%100
24	32	Y	-0.005	-0.005	0	%100
25	35	Y	-0.005	-0.005	0	%100
26	36	Y	-0.005	-0.005	0	%100

Member Distributed Loads (BLC 9 : 0 Seismic)

Member	Label	Direction	Start Magnitude [k/ft, F, ksf, k-ft/ft]	End Magnitude [k/ft, F, ksf, k-ft/ft]	Start Location [(ft, %)]	End Location [(ft, %)]
1	1	Z	-0.001	-0.001	0	%100
2	2	Z	-0.001	-0.001	0	%100
3	3	Z	-0.001	-0.001	0	%100
4	4	Z	-0.0004	-0.0004	0	%100
5	5	Z	-0.002	-0.002	0	%100
6	7	Z	-0.001	-0.001	0	%100
7	8	Z	-0.0004	-0.0004	0	%100
8	9	Z	-0.002	-0.002	0	%100
9	11	Z	-0.001	-0.001	0	%100
10	12	Z	-0.0004	-0.0004	0	%100

Member Distributed Loads (BLC 9 : 0 Seismic) (Continued)

Member	Label	Direction	Start Magnitude [k/ft, F, ksf, k-ft/ft]	End Magnitude [k/ft, F, ksf, k-ft/ft]	Start Location [(ft, %)]	End Location [(ft, %)]
11	13	Z	-0.002	-0.002	0	%100
12	15	Z	-0.001	-0.001	0	%100
13	16	Z	-0.0004	-0.0004	0	%100
14	17	Z	-0.002	-0.002	0	%100
15	19	Z	-0.0004	-0.0004	0	%100
16	20	Z	-0.0004	-0.0004	0	%100
17	21	Z	-0.0003	-0.0003	0	%100
18	22	Z	-0.0003	-0.0003	0	%100
19	23	Z	-0.0004	-0.0004	0	%100
20	24	Z	-0.0004	-0.0004	0	%100
21	25	Z	-0.0003	-0.0003	0	%100
22	26	Z	-0.0003	-0.0003	0	%100
23	29	Z	-0.0007	-0.0007	0	%100
24	32	Z	-0.0007	-0.0007	0	%100
25	35	Z	-0.0007	-0.0007	0	%100
26	36	Z	-0.0006	-0.0006	0	%100

Member Distributed Loads (BLC 10 : 90 Seismic)

Member	Label	Direction	Start Magnitude [k/ft, F, ksf, k-ft/ft]	End Magnitude [k/ft, F, ksf, k-ft/ft]	Start Location [(ft, %)]	End Location [(ft, %)]
1	1	X	-0.001	-0.001	0	%100
2	2	X	-0.001	-0.001	0	%100
3	3	X	-0.001	-0.001	0	%100
4	4	X	-0.0004	-0.0004	0	%100
5	5	X	-0.002	-0.002	0	%100
6	7	X	-0.001	-0.001	0	%100
7	8	X	-0.0004	-0.0004	0	%100
8	9	X	-0.002	-0.002	0	%100
9	11	X	-0.001	-0.001	0	%100
10	12	X	-0.0004	-0.0004	0	%100
11	13	X	-0.002	-0.002	0	%100
12	15	X	-0.001	-0.001	0	%100
13	16	X	-0.0004	-0.0004	0	%100
14	17	X	-0.002	-0.002	0	%100
15	19	X	-0.0004	-0.0004	0	%100
16	20	X	-0.0004	-0.0004	0	%100
17	21	X	-0.0003	-0.0003	0	%100
18	22	X	-0.0003	-0.0003	0	%100
19	23	X	-0.0004	-0.0004	0	%100
20	24	X	-0.0004	-0.0004	0	%100
21	25	X	-0.0003	-0.0003	0	%100
22	26	X	-0.0003	-0.0003	0	%100
23	29	X	-0.0007	-0.0007	0	%100
24	32	X	-0.0007	-0.0007	0	%100
25	35	X	-0.0007	-0.0007	0	%100
26	36	X	-0.0006	-0.0006	0	%100

Member Area Loads

No Data to Print...

Node Loads and Enforced Displacements (BLC 11 : Live Load a)

Node	Label	L, D, M	Direction	Magnitude [(k, k-ft), (in, rad), (k*s ² /ft, k*s ² /ft ²)]
1	57	L	Y	-0.5



Company : MTS Engineering, P.L.L.C.
 Designer : GRG
 Job Number : 149543.003.01
 Model Name : CT13065-A - Guilford

6/18/2022
 7:32:06 PM
 Checked By : _____

Node Loads and Enforced Displacements (BLC 12 : Live Load b)

	Node Label	L, D, M	Direction	Magnitude [(k, k-ft), (in, rad), (k*s ² /ft, k*s ² *ft)]
1	45	L	Y	-0.5

Node Loads and Enforced Displacements (BLC 13 : Live Load c)

	Node Label	L, D, M	Direction	Magnitude [(k, k-ft), (in, rad), (k*s ² /ft, k*s ² *ft)]
1	51	L	Y	-0.5

Basic Load Cases

	BLC Description	Category	Y Gravity	Nodal	Point	Distributed
1	Dead	DL	-1		10	
2	0 Wind - No Ice	WLZ			10	26
3	90 Wind - No Ice	WLX			10	26
4	0 Wind - Ice	WLZ			10	26
5	90 Wind - Ice	WLX			10	26
6	0 Wind - Service	WLZ			10	26
7	90 Wind - Service	WLX			10	26
8	Ice	OL1			10	26
9	0 Seismic	ELZ			10	26
10	90 Seismic	ELX			10	26
11	Live Load a	LL		1		
12	Live Load b	LL		1		
13	Live Load c	LL		1		
14	Live Load d	LL				
15	Maint LL 1	LL			1	
16	Maint LL 2	LL			1	
17	Maint LL 3	LL			1	
18	Maint LL 4	LL			1	
19	Maint LL 5	LL			1	
20	Maint LL 6	LL			1	
21	Maint LL 7	LL				
22	Maint LL 8	LL				
23	Maint LL 9	LL				
24	Maint LL 10	LL				
25	Maint LL 11	LL				
26	Maint LL 12	LL				
27	Maint LL 13	LL				
28	Maint LL 14	LL				
29	Maint LL 15	LL				

Load Combinations

	Description	Solve	P-Delta	BLC	Factor	BLC	Factor	BLC	Factor	BLC	Factor
1	1.4 Dead	Yes	Y	1	1.4						
2	1.2 D + 1.0 - 0 W	Yes	Y	1	1.2	2	1				
3	1.2 D + 1.0 - 30 W	Yes	Y	1	1.2	2	0.866	3	0.5		
4	1.2 D + 1.0 - 60 W	Yes	Y	1	1.2	3	0.866	2	0.5		
5	1.2 D + 1.0 - 90 W	Yes	Y	1	1.2	3	1				
6	1.2 D + 1.0 - 120 W	Yes	Y	1	1.2	3	0.866	2	-0.5		
7	1.2 D + 1.0 - 150 W	Yes	Y	1	1.2	2	-0.866	3	0.5		
8	1.2 D + 1.0 - 180 W	Yes	Y	1	1.2	2	-1				
9	1.2 D + 1.0 - 210 W	Yes	Y	1	1.2	2	-0.866	3	-0.5		
10	1.2 D + 1.0 - 240 W	Yes	Y	1	1.2	3	-0.866	2	-0.5		
11	1.2 D + 1.0 - 270 W	Yes	Y	1	1.2	3	-1				

Load Combinations (Continued)

	Description	Solve	P-Delta	BLC	Factor	BLC	Factor	BLC	Factor	BLC	Factor
12	1.2 D + 1.0 - 300 W	Yes	Y	1	1.2	3	-0.866	2	0.5		
13	1.2 D + 1.0 - 330 W	Yes	Y	1	1.2	2	0.866	3	-0.5		
14	1.2 D + 1.0 - 0 W/Ice	Yes	Y	1	1.2	4	1			8	1
15	1.2 D + 1.0 - 30 W/Ice	Yes	Y	1	1.2	4	0.866	5	0.5	8	1
16	1.2 D + 1.0 - 60 W/Ice	Yes	Y	1	1.2	5	0.866	4	0.5	8	1
17	1.2 D + 1.0 - 90 W/Ice	Yes	Y	1	1.2	5	1			8	1
18	1.2 D + 1.0 - 120 W/Ice	Yes	Y	1	1.2	5	0.866	4	-0.5	8	1
19	1.2 D + 1.0 - 150 W/Ice	Yes	Y	1	1.2	4	-0.866	5	0.5	8	1
20	1.2 D + 1.0 - 180 W/Ice	Yes	Y	1	1.2	4	-1			8	1
21	1.2 D + 1.0 - 210 W/Ice	Yes	Y	1	1.2	4	-0.866	5	-0.5	8	1
22	1.2 D + 1.0 - 240 W/Ice	Yes	Y	1	1.2	5	-0.866	4	-0.5	8	1
23	1.2 D + 1.0 - 270 W/Ice	Yes	Y	1	1.2	5	-1			8	1
24	1.2 D + 1.0 - 300 W/Ice	Yes	Y	1	1.2	5	-0.866	4	0.5	8	1
25	1.2 D + 1.0 - 330 W/Ice	Yes	Y	1	1.2	4	0.866	5	-0.5	8	1
26	1.2 D + 1.0 E - 0	Yes	Y	1	1.2	9	1				
27	1.2 D + 1.0 E - 30	Yes	Y	1	1.2	9	0.866	10	0.5		
28	1.2 D + 1.0 E - 60	Yes	Y	1	1.2	10	0.866	9	0.5		
29	1.2 D + 1.0 E - 90	Yes	Y	1	1.2	10	1				
30	1.2 D + 1.0 E - 120	Yes	Y	1	1.2	10	0.866	9	-0.5		
31	1.2 D + 1.0 E - 150	Yes	Y	1	1.2	9	-0.866	10	0.5		
32	1.2 D + 1.0 E - 180	Yes	Y	1	1.2	9	-1				
33	1.2 D + 1.0 E - 210	Yes	Y	1	1.2	9	-0.866	10	-0.5		
34	1.2 D + 1.0 E - 240	Yes	Y	1	1.2	10	-0.866	9	-0.5		
35	1.2 D + 1.0 E - 270	Yes	Y	1	1.2	10	-1				
36	1.2 D + 1.0 E - 300	Yes	Y	1	1.2	10	-0.866	9	0.5		
37	1.2 D + 1.0 E - 330	Yes	Y	1	1.2	9	0.866	10	-0.5		
38	1.2 D + 1.5 LL a + Service - 0 W	Yes	Y	1	1.2	6	1			11	1.5
39	1.2 D + 1.5 LL a + Service - 30 W	Yes	Y	1	1.2	6	0.866	7	0.5	11	1.5
40	1.2 D + 1.5 LL a + Service - 60 W	Yes	Y	1	1.2	7	0.866	6	0.5	11	1.5
41	1.2 D + 1.5 LL a + Service - 90 W	Yes	Y	1	1.2	7	1			11	1.5
42	1.2 D + 1.5 LL a + Service - 120 W	Yes	Y	1	1.2	7	0.866	6	-0.5	11	1.5
43	1.2 D + 1.5 LL a + Service - 150 W	Yes	Y	1	1.2	6	-0.866	7	0.5	11	1.5
44	1.2 D + 1.5 LL a + Service - 180 W	Yes	Y	1	1.2	6	-1			11	1.5
45	1.2 D + 1.5 LL a + Service - 210 W	Yes	Y	1	1.2	6	-0.866	7	-0.5	11	1.5
46	1.2 D + 1.5 LL a + Service - 240 W	Yes	Y	1	1.2	7	-0.866	6	-0.5	11	1.5
47	1.2 D + 1.5 LL a + Service - 270 W	Yes	Y	1	1.2	7	-1			11	1.5
48	1.2 D + 1.5 LL a + Service - 300 W	Yes	Y	1	1.2	7	-0.866	6	0.5	11	1.5
49	1.2 D + 1.5 LL a + Service - 330 W	Yes	Y	1	1.2	6	0.866	7	-0.5	11	1.5
50	1.2 D + 1.5 LL b + Service - 0 W	Yes	Y	1	1.2	6	1			12	1.5
51	1.2 D + 1.5 LL b + Service - 30 W	Yes	Y	1	1.2	6	0.866	7	0.5	12	1.5
52	1.2 D + 1.5 LL b + Service - 60 W	Yes	Y	1	1.2	7	0.866	6	0.5	12	1.5
53	1.2 D + 1.5 LL b + Service - 90 W	Yes	Y	1	1.2	7	1			12	1.5
54	1.2 D + 1.5 LL b + Service - 120 W	Yes	Y	1	1.2	7	0.866	6	-0.5	12	1.5
55	1.2 D + 1.5 LL b + Service - 150 W	Yes	Y	1	1.2	6	-0.866	7	0.5	12	1.5
56	1.2 D + 1.5 LL b + Service - 180 W	Yes	Y	1	1.2	6	-1			12	1.5
57	1.2 D + 1.5 LL b + Service - 210 W	Yes	Y	1	1.2	6	-0.866	7	-0.5	12	1.5
58	1.2 D + 1.5 LL b + Service - 240 W	Yes	Y	1	1.2	7	-0.866	6	-0.5	12	1.5
59	1.2 D + 1.5 LL b + Service - 270 W	Yes	Y	1	1.2	7	-1			12	1.5
60	1.2 D + 1.5 LL b + Service - 300 W	Yes	Y	1	1.2	7	-0.866	6	0.5	12	1.5
61	1.2 D + 1.5 LL b + Service - 330 W	Yes	Y	1	1.2	6	0.866	7	-0.5	12	1.5
62	1.2 D + 1.5 LL c + Service - 0 W	Yes	Y	1	1.2	6	1			13	1.5
63	1.2 D + 1.5 LL c + Service - 30 W	Yes	Y	1	1.2	6	0.866	7	0.5	13	1.5
64	1.2 D + 1.5 LL c + Service - 60 W	Yes	Y	1	1.2	7	0.866	6	0.5	13	1.5
65	1.2 D + 1.5 LL c + Service - 90 W	Yes	Y	1	1.2	7	1			13	1.5
66	1.2 D + 1.5 LL c + Service - 120 W	Yes	Y	1	1.2	7	0.866	6	-0.5	13	1.5



Load Combinations (Continued)

	Description	Solve	P-Delta	BLC	Factor	BLC	Factor	BLC	Factor	BLC	Factor
67	1.2 D + 1.5 LL c + Service - 150 W	Yes	Y	1	1.2	6	-0.866	7	0.5	13	1.5
68	1.2 D + 1.5 LL c + Service - 180 W	Yes	Y	1	1.2	6	-1			13	1.5
69	1.2 D + 1.5 LL c + Service - 210 W	Yes	Y	1	1.2	6	-0.866	7	-0.5	13	1.5
70	1.2 D + 1.5 LL c + Service - 240 W	Yes	Y	1	1.2	7	-0.866	6	-0.5	13	1.5
71	1.2 D + 1.5 LL c + Service - 270 W	Yes	Y	1	1.2	7	-1			13	1.5
72	1.2 D + 1.5 LL c + Service - 300 W	Yes	Y	1	1.2	7	-0.866	6	0.5	13	1.5
73	1.2 D + 1.5 LL c + Service - 330 W	Yes	Y	1	1.2	6	0.866	7	-0.5	13	1.5
74	1.2 D + 1.5 LL d + Service - 0 W	Yes	Y	1	1.2	6	1			14	1.5
75	1.2 D + 1.5 LL d + Service - 30 W	Yes	Y	1	1.2	6	0.866	7	0.5	14	1.5
76	1.2 D + 1.5 LL d + Service - 60 W	Yes	Y	1	1.2	7	0.866	6	0.5	14	1.5
77	1.2 D + 1.5 LL d + Service - 90 W	Yes	Y	1	1.2	7	1			14	1.5
78	1.2 D + 1.5 LL d + Service - 120 W	Yes	Y	1	1.2	7	0.866	6	-0.5	14	1.5
79	1.2 D + 1.5 LL d + Service - 150 W	Yes	Y	1	1.2	6	-0.866	7	0.5	14	1.5
80	1.2 D + 1.5 LL d + Service - 180 W	Yes	Y	1	1.2	6	-1			14	1.5
81	1.2 D + 1.5 LL d + Service - 210 W	Yes	Y	1	1.2	6	-0.866	7	-0.5	14	1.5
82	1.2 D + 1.5 LL d + Service - 240 W	Yes	Y	1	1.2	7	-0.866	6	-0.5	14	1.5
83	1.2 D + 1.5 LL d + Service - 270 W	Yes	Y	1	1.2	7	-1			14	1.5
84	1.2 D + 1.5 LL d + Service - 300 W	Yes	Y	1	1.2	7	-0.866	6	0.5	14	1.5
85	1.2 D + 1.5 LL d + Service - 330 W	Yes	Y	1	1.2	6	0.866	7	-0.5	14	1.5
86	1.2 D + 1.5 LL Maint (1)	Yes	Y	1	1.2					15	1.5
87	1.2 D + 1.5 LL Maint (2)	Yes	Y	1	1.2					16	1.5
88	1.2 D + 1.5 LL Maint (3)	Yes	Y	1	1.2					17	1.5
89	1.2 D + 1.5 LL Maint (4)	Yes	Y	1	1.2					18	1.5
90	1.2 D + 1.5 LL Maint (5)	Yes	Y	1	1.2					19	1.5
91	1.2 D + 1.5 LL Maint (6)	Yes	Y	1	1.2					20	1.5

Envelope Node Reactions

Node Label	X [k]	LC	Y [k]	LC	Z [k]	LC	MX [k-ft]	LC	MY [k-ft]	LC	MZ [k-ft]	LC
1	12	max	0.796	40	0.704	65	0.828	13	0	91	0	91
2		min	-1.438	70	0.281	11	-2.023	7	0	1	0	1
3	27	max	1.433	65	0.666	59	1.384	62	0	91	0	91
4		min	-0.791	47	0.258	5	0.232	8	0	1	0	1
5	64	max	0.215	6	0.055	18	0.76	6	0	91	0	91
6		min	-0.216	12	0.013	12	-0.76	12	0	1	0	1
7	Totals:	max	0.847	5	1.378	49	1.173	2				
8		min	-0.847	11	0.628	10	-1.173	8				

Envelope AISC 15TH (360-16): LRFD Member Steel Code Checks

Member	Shape	Code Check	Loc [ft]	LC	Shear	Check	Loc [ft]	LC	DirL	ϕ^*P_{nc} [k]	ϕ^*P_{nt} [k]	$\phi^*M_{n y-y}$ [k-ft]	$\phi^*M_{n z-z}$ [k-ft]	Cb	Eqn
1	20	0.63"SR	0.521	2.5	67	0.012	0	67	1.941	14.028	0.147	0.147	1	H1-1a	
2	24	0.63"SR	0.418	2.5	49	0.014	0	67	1.941	14.028	0.147	0.147	1	H1-1a	
3	19	0.63"SR	0.395	2.5	65	0.006	2.5	66	1.941	14.028	0.147	0.147	1	H1-1a	
4	23	0.63"SR	0.306	2.5	49	0.009	0	6	1.941	14.028	0.147	0.147	1	H1-1a	
5	21	1/2"SR	0.298	0	68	0.008	3.499	48	0.393	8.836	0.074	0.074	1	H1-1a	
6	12	1.9"ODX0.12"	0.295	0.135	66	0.055	2.449	44	21.867	25.364	1.2	1.2	1	H1-1b	
7	4	1.9"ODX0.12"	0.269	0.135	67	0.053	2.449	43	21.867	25.364	1.2	1.2	1	H1-1b	
8	3	PL5/8X3.5	0.246	0.583	67	0.081	0.583	y 38	83.691	98.438	1.282	7.178	1.818	H1-1b	
9	11	PL5/8X3.5	0.238	0.583	67	0.082	0.583	y 45	83.691	98.438	1.282	7.144	1.006	H1-1b	
10	16	1.9"ODX0.12"	0.236	0.135	49	0.061	0.135	67	21.867	25.364	1.2	1.2	1	H1-1b	
11	25	1/2"SR	0.231	0	48	0.011	0	71	0.393	8.836	0.074	0.074	1	H1-1a	
12	8	1.9"ODX0.12"	0.217	1.292	87	0.061	0.135	67	21.867	25.364	1.2	1.2	1	H1-1b	
13	7	PL5/8X3.5	0.193	0.583	49	0.095	0.007	y 67	83.691	98.438	1.282	7.178	1.24	H1-1b	
14	15	PL5/8X3.5	0.19	0.583	49	0.098	0.583	y 67	83.691	98.438	1.282	7.178	1.07	H1-1b	



Company : MTS Engineering, P.L.L.C.
 Designer : GRG
 Job Number : 149543.003.01
 Model Name : CT13065-A - Guilford

6/18/2022
 7:32:06 PM
 Checked By : _____

Envelope AISC 15TH (360-16): LRFD Member Steel Code Checks (Continued)

Member	Shape	Code	Check	Loc	[ft]	LC	Shear	Check	Loc	[ft]	Dir	Lc	phi*	Pnc	[k]	phi*	Pnt	[k]	phi*	Mn	y-y	[k-ft]	phi*	Mn	z-z	[k-ft]	Cb	Eqn
15	32	PIPE2.88X.12	0.16	5.25	63		0.046	5.25	62			22.493	43.056	3.157	3.157	1	H1-1b											
16	36	PIPE2.38X0.12	0.151	0	6		0.005	12.56	23			5.42	35.273	2.115	2.115	1	H1-1b*											
17	2	PIPE 2.88X0.203	0.128	6.25	8		0.066	1.75	6			35.361	70.548	5.01	5.01	1	H1-1b											
18	35	PIPE2.88X.12	0.125	5.25	43		0.037	5.25	49			22.493	43.056	3.157	3.157	1	H1-1b											
19	9	PL5/8X4.25	0.119	0.362	13		0.044	0.362	y	7		110.629	119.531	1.556	10.583	1.429	H1-1b											
20	1	PIPE 2.88X0.203	0.103	7.667	71		0.068	6.25	68			35.361	70.548	5.01	5.01	1	H1-1b											
21	5	PL5/8X4.25	0.102	0.127	7		0.039	0.362	y	43		110.629	119.531	1.556	10.583	1.431	H1-1b											
22	13	PL5/8X4.25	0.078	0.127	8		0.044	0.362	y	8		110.629	119.531	1.556	10.583	1.444	H1-1b											
23	29	PIPE2.88X.12	0.074	2.75	7		0.043	2.75	67			22.493	43.056	3.157	3.157	1	H1-1b											
24	17	PL5/8X4.25	0.047	0.127	43		0.046	0.362	y	68		110.629	119.531	1.556	10.583	1.746	H1-1b											
25	26	1/2"SR	0.007	3.499	6		0.011	0	7			0.393	8.836	0.074	0.074	1	H1-1b*											
26	22	1/2"SR	0	3.499	91		0.007	0	43			0.393	8.836	0.074	0.074	1	H1-1a											

APPENDIX B

(Additional Calculations)

PROJECT	149543.003.01 - Guilford, CT	KSC
SUBJECT	Sector Mount Analysis	
DATE	06/20/22	PAGE 1 OF 1



B+T Group
 1717 S. Boulder, Suite 300
 Tulsa, OK 74119
 (918) 587-4630

B+T GRP

[REF: AISC 360-05]

Reactions at Bolted Connection

Tension	:	2.023	k
Vertical Shear	:	0.704	k
Horizontal Shear	:	1.438	k
Torsion	:	0	k.ft
Moment from Horizontal Forces	:	0	k.ft
Moment from Vertical Forces	:	0	k.ft

Bolt Parameters

Bolt Grade	:	A325	
Bolt Diameter	:	0.625	in
Nominal Bolt Area	:	0.307	in ²
Bolt spacing, Horizontal	:	6	in
Bolt spacing, Vertical	:	6	in
Bolt edge distance, plate height	:	1.5	in
Bolt edge distance, plate width	:	1.5	in
Total Number of Bolts	:	4	bolts

Summary of Forces

Shear Resultant Force	:	1.60	k
Force from Horz. Moment	:	0.00	k
Force from Vert. Moment	:	0.00	k
Shear Load / Bolt	:	0.40	k
Tension Load / Bolt	:	0.51	k
Resultant from Moments / Bolt	:	0.00	k

Bolt Checks

Nominal Tensile Stress, F_{nt}	:	90.00	ksi	[AISC Table J3.2]
Available Tensile Stress, ΦR_{nt}	:	20.72	k/bolt	[Eq. J3-1]
Unity Check, Bolt Tension	:	2.44%		OKAY
Nominal Shear Stress, F_{nv}	:	48.00	ksi	[AISC Table J3.2]
Available Shear Stress, ΦR_{nv}	:	11.05	k/bolt	[Eq. J3-1]
Unity Check, Bolt Shear	:	8.20%		OKAY
Unity Check, Combined	:	10.64%		OKAY
Available Bearing Strength, ΦR_n	:	34.66	k/bolt	
Unity Check, Bolt Bearing	:	1.15%		OKAY

Exhibit F

Power Density/RF Emissions Report



Radio Frequency Emissions Analysis Report



Site ID: BOHVN00180A

SBA Guilford
331 Killingworth Road (Rt 80)
Guilford, CT 06437

July 8, 2022

Fox Hill Telecom Project Number: 221179

Site Compliance Summary	
Compliance Status:	COMPLIANT
Site total MPE% of FCC general population allowable limit:	44.82 %

July 8, 2022

Dish Wireless
5701 South Santa Fe Drive
Littleton, CO 80120

Emissions Analysis for Site: **BOHVN00180A – SBA Guilford**

Fox Hill Telecom, Inc (“Fox Hill”) was directed to analyze the proposed radio installation for Dish Wireless, LLC (Dish) facility located at **331 Killingworth Road (Rt 80), Guilford, CT**, for the purpose of determining whether the emissions from the Proposed Dish radio and antenna installation located on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01 and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The number of $\mu\text{W}/\text{cm}^2$ calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits, therefore it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) – (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

General population/uncontrolled exposure limits apply to situations in which the general population may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general population would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Population exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The general population exposure limits for the 600 MHz & 700 MHz bands are approximately $400 \mu\text{W}/\text{cm}^2$ and $467 \mu\text{W}/\text{cm}^2$ respectively. The general population exposure limit for the 1900 MHz (PCS) and 2100 MHz (AWS / AWS-4) bands is $1000 \mu\text{W}/\text{cm}^2$. Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.



Occupational/controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

CALCULATIONS

Calculations were performed for the proposed radio system installation for **Dish** on the subject site located at **331 Killingworth Road (Rt 80), Guilford, CT**, using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. Since **Dish** is proposing highly focused directional panel antennas, which project most of the emitted energy out toward the horizon, all calculations were performed assuming a lobe representing the maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB for directional panel antennas, was focused at the base of the tower. For this report the sample point is the top of a 6-foot person standing at the base of the tower.

Per FCC OET Bulletin No. 65 - Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. All power values expressed and analyzed are maximum power levels expected to be used on all radios.

All emissions values for additional carriers were taken from the Connecticut Siting Council (CSC) active MPE database. Values in this database are provided by the individual carriers themselves

For each sector the following channel counts, frequency bands and power levels were utilized as shown in *Table 1*:

Technology	Frequency Band	Channel Count	Transmit Power per Channel (W)
5G	n71 (600 MHz)	4	61.5
5G	n70 (AWS-4 / 1995-2020)	4	40
5G	n66 (AWS-4 / 2180-2200)	4	40

Table 1: Channel Data Table

The following antennas listed in *Table 2* were used in the modeling for transmission in the 600 MHz (n71) frequency band, and the 2100 MHz (AWS 4) frequency bands at 1995-2020 MHz (n70) and 2180-2200 MHz (n66). This is based on feedback from the carrier with regards to anticipated antenna selection. Maximum gain values for all antennas are listed in the Inventory and Power Data table below. The maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB for directional panel antennas, was used for all calculations. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.

Sector	Antenna Number	Antenna Make / Model	Antenna Centerline (ft)
A	1	JMA MX08FRO665-21	105
B	1	JMA MX08FRO665-21	105
C	1	JMA MX08FRO665-21	105

Table 2: Antenna Data

All calculations were done with respect to uncontrolled / general population threshold limits.

RESULTS

Per the calculations completed for the proposed **Dish** configurations *Table 3* shows resulting emissions power levels and percentages of the FCC's allowable general population limit.

Antenna ID	Antenna Make / Model	Frequency Bands	Antenna Gain (dBd)	Channel Count	Total TX Power (W)	ERP (W)	MPE %
Antenna A1	JMA MX08FRO665-21	n71 (600 MHz) / n70 (AWS-4 / 1995-2020) / n66 (AWS-4 / 2180-2200)	11.45 / 16.15 / 16.65	12	566	17,426.72	8.28
Sector A Composite MPE%							8.28
Antenna B1	JMA MX08FRO665-21	n71 (600 MHz) / n70 (AWS-4 / 1995-2020) / n66 (AWS-4 / 2180-2200)	11.45 / 16.15 / 16.65	12	566	17,426.72	8.28
Sector B Composite MPE%							8.28
Antenna C1	JMA MX08FRO665-21	n71 (600 MHz) / n70 (AWS-4 / 1995-2020) / n66 (AWS-4 / 2180-2200)	11.45 / 16.15 / 16.65	12	566	17,426.72	8.28
Sector C Composite MPE%							8.28

Table 3: Dish Emissions Levels



The Following table (*Table 4*) shows all additional carriers on site and their MPE% as recorded in the CSC active MPE database for this facility along with the newly calculated maximum **Dish** MPE contributions per this report. FCC OET 65 specifies that for carriers utilizing directional antennas that the highest recorded sector value be used for composite site MPE values due to their greatly reduced emissions contributions in the directions of the adjacent sectors. For this site, all three sectors have the same configuration yielding the same results on all three sectors. *Table 5* below shows a summary for each **Dish** Sector as well as the composite MPE value for the site.

Site Composite MPE%	
Carrier	MPE%
Dish – Max Per Sector Value	8.28 %
AT&T	5.68 %
T-Mobile	13.73 %
Nextel	0.65 %
Verizon	16.48 %
Site Total MPE %:	44.82 %

Table 4: All Carrier MPE Contributions

Dish Sector A Total:	8.28 %
Dish Sector B Total:	8.28 %
Dish Sector C Total:	8.28 %
Site Total:	44.82 %

Table 5: Site MPE Summary



FCC OET 65 specifies that for carriers utilizing directional antennas that the highest recorded sector value be used for composite site MPE values due to their greatly reduced emissions contributions in the directions of the adjacent sectors. *Table 6* below details a breakdown by frequency band and technology for the MPE power values for the maximum calculated **Dish** sector(s). For this site, all three sectors have the same configuration yielding the same results on all three sectors.

Dish _ Frequency Band / Technology Max Power Values (Per Sector)	# Channels	Watts ERP (Per Channel)	Height (feet)	Total Power Density ($\mu\text{W}/\text{cm}^2$)	Frequency (MHz)	Allowable MPE ($\mu\text{W}/\text{cm}^2$)	Calculated % MPE
Dish n71 (600 MHz) 5G	4	858.77	105	12.60	n71 (600 MHz)	400	3.15%
Dish n70 (AWS-4 / 1995-2020) 5G	4	1,648.39	105	24.19	n70 (AWS-4 / 1995-2020)	1000	2.42%
Dish n66 (AWS-4 / 2180-2200) 5G	4	1,849.52	105	27.14	n66 (AWS-4 / 2180-2200)	1000	2.71%
						Total:	8.28%

Table 6: Dish Maximum Sector MPE Power Values

Summary

All calculations performed for this analysis yielded results that were **within** the allowable limits for general population exposure to RF Emissions.

The anticipated maximum composite contributions from the Dish facility as well as the site composite emissions value with regards to compliance with FCC's allowable limits for general population exposure to RF Emissions are shown here:

Dish Sector	Power Density Value (%)
Sector A:	8.28 %
Sector B:	8.28 %
Sector C:	8.28 %
Dish Maximum Total (per sector):	8.28 %
Site Total:	44.82 %
Site Compliance Status:	COMPLIANT

The anticipated composite MPE value for this site assuming all carriers present is **44.82 %** of the allowable FCC established general population limit sampled at the ground level. This is based upon values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.



Scott Heffernan
Principal RF Engineer
Fox Hill Telecom, Inc
Holden, MA 01520
(978)660-3998

Exhibit G

Letter of Authorization

SBA Letter of Authorization

CT - CONNECTICUT SITING COUNCIL

Melanie A. Bachman

Executive Director

Connecticut Siting Council

10 Franklin Square

New Britain, CT 06051

Re: Tower Share Application

SBA COMMUNICATIONS CORPORATION hereby authorizes DISH Wireless LLC, including their Agent, to act as our Agent in the processing of all zoning applications, building permits and approvals through the CONNECTICUT SITING COUNCIL for existing wireless communications towers.

Kri Pelletier

Site Development Manager


SBA COMMUNICATIONS CORPORATION

134 Flanders Road, Suite 125

Westboro, MA 01581


Exhibit H

Recipient Mailings



USPS TRACKING #
9405 5036 9930 0309 0373 79

Electronic Rate Approved #038555749



MATTHEW T HOEY III
FIRST SELECTMAN
31 PARK ST
GUILFORD CT 06437-2629

P


07/28/2022

PRIORITY MAIL®

DEBORAH CHASE
NORTHEAST SITE SOLUTIONS
STE 1
420 MAIN ST
STURBRIDGE MA 01566-1359

Expected Delivery Date: 07/30/22
Ref#: SBDS-00180
0000

C005



UNITED STATES POSTAL SERVICE®

Click-N-Ship®

usps.com
9405 5036 9930 0309 0373 79 0089 5000 0020 6437
US POSTAGE \$8.95
Flat Rate Env
U.S. POSTAGE PAID
Click-N-Ship®

Mailed from 01566



Cut on dotted line.

Instructions

- Each Click-N-Ship® label is unique. Labels are to be used as printed and used only once. DO NOT PHOTO COPY OR ALTER LABEL.
- Place your label so it does not wrap around the edge of the package.
- Adhere your label to the package. A self-adhesive label is recommended. If tape or glue is used, DO NOT TAPE OVER BARCODE. Be sure all edges are secure.
- To mail your package with PC Postage®, you may schedule a Package Pickup online, hand to your letter carrier, take to a Post Office™, or drop in a USPS collection box.
- Mail your package on the "Ship Date" you selected when creating this label.

Click-N-Ship® Label Record

USPS TRACKING # :
9405 5036 9930 0309 0373 79

Trans. #: 568625714	Priority Mail® Postage: \$8.95
Print Date: 07/28/2022	Total: \$8.95
Ship Date: 07/28/2022	
Expected Delivery Date: 07/30/2022	

From: DEBORAH CHASE
NORTHEAST SITE SOLUTIONS
STE 1
420 MAIN ST
STURBRIDGE MA 01566-1359


Ref#: SBDS-00180

To: MATTHEW T HOEY III
FIRST SELECTMAN
31 PARK ST
GUILFORD CT 06437-2629

* Retail Pricing Priority Mail rates apply. There is no fee for USPS Tracking® service on Priority Mail service with use of this electronic rate shipping label. Refunds for unused postage paid labels can be requested online 30 days from the print date.




Thank you for shipping with the United States Postal Service!
Check the status of your shipment on the USPS Tracking® page at usps.com



JAIME STEIN
GUILFORD PLANNING & ZONING
50 BOSTON ST
GUILFORD CT 06437-2801

USPS TRACKING #



9405 5036 9930 0309 0374 16

P

07/28/2022

PRIORITY MAIL®

Expected Delivery Date: 07/30/22
Ref#: SBDS-00180
0000

C002

USPS.com
US POSTAGE
Flat Rate Env

9405 5036 9930 0309 0374 16 0089 5000 0020 6437


U.S. POSTAGE PAID
click-n-ship®

Click-N-Ship®

Mailed from 01566

UNITED STATES POSTAL SERVICE®

Electronic Rate Approved #038555749





Cut on dotted line.

Instructions

1. Each Click-N-Ship® label is unique. Labels are to be used as printed and used only once. DO NOT PHOTO COPY OR ALTER LABEL.
2. Place your label so it does not wrap around the edge of the package.
3. Adhere your label to the package. A self-adhesive label is recommended. If tape or glue is used, DO NOT TAPE OVER BARCODE. Be sure all edges are secure.
4. To mail your package with PC Postage®, you may schedule a Package Pickup online, hand to your letter carrier, take to a Post Office™, or drop in a USPS collection box.
5. Mail your package on the "Ship Date" you selected when creating this label.

Click-N-Ship® Label Record

USPS TRACKING # :
9405 5036 9930 0309 0374 16

Trans. #: 568625714	Priority Mail® Postage: \$8.95
Print Date: 07/28/2022	Total: \$8.95
Ship Date: 07/28/2022	
Expected Delivery Date: 07/30/2022	

From: DEBORAH CHASE
NORTHEAST SITE SOLUTIONS
STE 1
420 MAIN ST
STURBRIDGE MA 01566-1359


Ref#: SBDS-00180

To: JAIME STEIN
GUILFORD PLANNING & ZONING
50 BOSTON ST
GUILFORD CT 06437-2801

* Retail Pricing Priority Mail rates apply. There is no fee for USPS Tracking® service on Priority Mail service with use of this electronic rate shipping label. Refunds for unused postage paid labels can be requested online 30 days from the print date.




Thank you for shipping with the United States Postal Service!
Check the status of your shipment on the USPS Tracking® page at usps.com



KATHLEEN BLOOMQUIST
331 ROUTE 80
GUILFORD CT 06437-1123

USPS TRACKING #




9405 5036 9930 0309 0374 30

DEBORAH CHASE
NORTHEAST SITE SOLUTIONS
STE 1
420 MAIN ST
STURBRIDGE MA 01566-1359

PRIORITY MAIL®

Expected Delivery Date: 07/30/22
Ref#: SBDS-00180
0000

R001



Click-N-Ship®

usps.com 9405 5036 9930 0309 0374 30 0089 5000 0020 6437
US POSTAGE
 Flat Rate Env
U.S. POSTAGE PAID
 Click-N-Ship®

07/28/2022 Mailed from 01566



Cut on dotted line.

Instructions

1. Each Click-N-Ship® label is unique. Labels are to be used as printed and used only once. DO NOT PHOTO COPY OR ALTER LABEL.
2. Place your label so it does not wrap around the edge of the package.
3. Adhere your label to the package. A self-adhesive label is recommended. If tape or glue is used, DO NOT TAPE OVER BARCODE. Be sure all edges are secure.
4. To mail your package with PC Postage®, you may schedule a Package Pickup online, hand to your letter carrier, take to a Post Office™, or drop in a USPS collection box.
5. Mail your package on the "Ship Date" you selected when creating this label.

Click-N-Ship® Label Record

USPS TRACKING # :
9405 5036 9930 0309 0374 30

Trans. #: 568625714	Priority Mail® Postage: \$8.95
Print Date: 07/28/2022	Total: \$8.95
Ship Date: 07/28/2022	
Expected Delivery Date: 07/30/2022	

From: DEBORAH CHASE Ref#: SBDS-00180
 NORTHEAST SITE SOLUTIONS
 STE 1
 420 MAIN ST
 STURBRIDGE MA 01566-1359


To: KATHLEEN BLOOMQUIST
 331 ROUTE 80
 GUILFORD CT 06437-1123

* Retail Pricing Priority Mail rates apply. There is no fee for USPS Tracking® service on Priority Mail service with use of this electronic rate shipping label. Refunds for unused postage paid labels can be requested online 30 days from the print date.




Thank you for shipping with the United States Postal Service!

Check the status of your shipment on the USPS Tracking® page at usps.com



SBA COMMUNICATIONS CORPORATION
STE 125
13 FLANDERS RD
WESTBOROUGH MA 01581

USPS TRACKING #




9405 5036 9930 0309 0374 54

DEBORAH CHASE
NORTHEAST SITE SOLUTIONS
STE 1
420 MAIN ST
STURBRIDGE MA 01566-1359

PRIORITY MAIL®

Expected Delivery Date: 07/29/22
Ref#: SBDS-00180
0000

R005




Click-N-Ship®

P

usps.com 9405 5036 9930 0309 0374 54 0089 5000 0010 1581
US POSTAGE
 Flat Rate Env
U.S. POSTAGE PAID
 Click-N-Ship®

07/28/2022 Mailed from 01566

Electronic Rate Approved #038555749





Cut on dotted line.

Instructions

- Each Click-N-Ship® label is unique. Labels are to be used as printed and used only once. DO NOT PHOTO COPY OR ALTER LABEL.
- Place your label so it does not wrap around the edge of the package.
- Adhere your label to the package. A self-adhesive label is recommended. If tape or glue is used, DO NOT TAPE OVER BARCODE. Be sure all edges are secure.
- To mail your package with PC Postage®, you may schedule a Package Pickup online, hand to your letter carrier, take to a Post Office™, or drop in a USPS collection box.
- Mail your package on the "Ship Date" you selected when creating this label.

Click-N-Ship® Label Record

USPS TRACKING # :	
9405 5036 9930 0309 0374 54	
Trans. #: 568625714	Priority Mail® Postage: \$8.95
Print Date: 07/28/2022	Total: \$8.95
Ship Date: 07/28/2022	
Expected Delivery Date: 07/29/2022	
From: DEBORAH CHASE Ref#: SBDS-00180	
NORTHEAST SITE SOLUTIONS	
STE 1	
420 MAIN ST	
STURBRIDGE MA 01566-1359	
To: SBA COMMUNICATIONS CORPORATION	
STE 125	
13 FLANDERS RD	
WESTBOROUGH MA 01581	
* Retail Pricing Priority Mail rates apply. There is no fee for USPS Tracking® service on Priority Mail service with use of this electronic rate shipping label. Refunds for unused postage paid labels can be requested online 30 days from the print date.	



Thank you for shipping with the United States Postal Service!
 Check the status of your shipment on the USPS Tracking® page at usps.com



FARMINGTON
 210 MAIN ST
 FARMINGTON, CT 06032-9998
 (800)275-8777

07/29/2022

03:47 PM

Product	Qty	Unit Price	Price
Prepaid Mail Westborough, MA 01581 Weight: 0 lb 2.00 oz Acceptance Date: Fri 07/29/2022 Tracking #: 9405 5036 9930 0309 0374 54	1		\$0.00
Prepaid Mail Guilford, CT 06437 Weight: 0 lb 8.30 oz Acceptance Date: Fri 07/29/2022 Tracking #: 9405 5036 9930 0309 0374 30	1		\$0.00
Prepaid Mail Guilford, CT 06437 Weight: 0 lb 8.20 oz Acceptance Date: Fri 07/29/2022 Tracking #: 9405 5036 9930 0309 0373 79	1		\$0.00
Prepaid Mail Guilford, CT 06437 Weight: 0 lb 8.30 oz Acceptance Date: Fri 07/29/2022 Tracking #: 9405 5036 9930 0309 0374 16	1		\$0.00

Grand Total: \$0.00

 Every household in the U.S. is now
 eligible to receive a third set
 of 8 free test kits.
 Go to www.covidtests.gov

Preview your Mail
 Track your Packages
 Sign up for FREE @
<https://informedelivery.usps.com>

All sales final on stamps and postage.
 Refunds for guaranteed services only.
 Thank you for your business.

Tell us about your experience.
 Go to: <https://postalexperience.com/Pos>
 or scan this code with your mobile device.



or call 1-800-410-7420