

JONATHAN H. SCHAEFER

One State Street  
Hartford, CT 06103  
Main (860) 275-8200  
Fax (860) 275-8299  
jschaefer@rc.com  
Direct (860) 275-8349

Also admitted in Massachusetts  
and Vermont

June 17, 2026

*Via Electronic and U.S. Mail*

Melanie A. Bachman, Esq.  
Executive Director/Staff Attorney  
Connecticut Siting Council  
10 Franklin Square  
New Britain, CT 06051

**Re: Notice of Exempt Modification – Guilford Fair  
111 Lovers Lane, Guilford, Connecticut  
Temporary Telecommunications Facility**

Dear Attorney Bachman:

Pursuant to R.C.S.A. Section 16-50j-72(d), this letter will serve as notice that Cellco Partnership d/b/a Verizon Wireless (“Cellco”) intends to install a temporary wireless facility (a/k/a “Cell on Wheels” or “COW”) on property at 111 Lovers Lane in Guilford, Connecticut (the “Property”) for use during the 2026 Guilford Fair. Cellco intends to install the COW at the Property on September 8, 2026 and remove it on September 21, 2026.

Cellco intends to install the COW in a grassy area adjacent to an access road on the Property. The Property is owned by the Guilford Agricultural Society (“GAS”). Included in Attachment 1 is a letter from the GAS authorizing the filing of this notice. In accordance with R.C.S.A. Section 16-50j-73, a copy of this filing has been sent to Matthew T. Hoey, III, Guilford’s First Selectman, Anne Hartjen, Guilford’s Town Planner, and the GAS.

The COW that Cellco intends to install at the Property is a trailer-mounted wireless facility with a retractable mast. Cellco will attach eleven (11) panel antennas to the mast, four (4) at a centerline height of 45 feet above ground level (“AGL”) and seven (7) at a centerline height of 40 feet AGL. The COW will be powered using electric service on the Property.

34821260-v1

# Robinson+Cole

Melanie A. Bachman, Esq.

June 17, 2026

Page 2

Included in Attachment 2 is a Lease Exhibit showing the proposed COW, its location on the Property and specifications for the antennas and radios that Cellco intends to use.

The proposed temporary telecommunications facility satisfies the criteria set forth in R.C.S.A. Section 16-50j-72(d), as a facility that will provide temporary wireless services for an event of State-wide significance. The COW will provide additional network capacity to accommodate increased wireless voice and data services needed during the fair.

The operation of the COW will not result in a total radio frequency (RF) emissions level that exceed the Federal Communications Commission (FCC) safety standard. Included in Attachment 3 are Far Field Approximation Tables for the frequencies Cellco intends to deploy at this temporary facility. These tables demonstrate that the temporary facility will operate well within the FCC standards.

Finally, in Attachment 4 is a copy of the Town Assessor's parcel map including owner information for the Property. A Certificate of Mailing verifying that this filing was sent to municipal officials and the Property owner is included in Attachment 5.

Based on the foregoing, Cellco respectfully requests acknowledgement of this notice for the installation of a temporary wireless facility at the Property. Please feel free to contact me if you have any questions or need any additional information.

Sincerely,



Jonathan H. Schaefer

## Attachments

### Copy to:

Matthew T. Hoey, III, First Selectman

Anne Hartjen, Town Planner

Guilford Agricultural Society

Daniel Fitzpatrick, Verizon Wireless, via email

Kip Divito, RF Engineer, Verizon Wireless, via email

Brian Ross, Structure Consulting, via email

# **ATTACHMENT 1**

GUILFORD AGRICULTURAL SOCIETY  
PO Box 290  
Guilford, CT 06437

**RE: Evidence of Agreement and Landowner's Consent to File for  
Permits/Approvals to be Granted to Cellco Partnership d/b/a Verizon  
Wireless**

To Whom It May Concern:

The Guilford Agricultural Society is the owner of certain real property located in the Town of Guilford at 111 Lovers Lane and identified as Map/Block/Lot 04/01/38 on the tax map of the Town of Guilford ("Subject Property").

Please be advised that Guilford Agricultural Society has entered into an agreement with Cellco Partnership d/b/a Verizon Wireless ("Applicant") to install a temporary wireless communications facility on a portion of the Subject Property, and permission is hereby granted to Applicant to make application for Building, Zoning, Planning, or any other Land Use or Regulatory Permit(s) required to effectuate the installation of said wireless facility.

The Applicant, or its agent, is hereby authorized to execute the required application(s) regarding this matter. Permission is also hereby granted for public officials and Board, Commission or Council members, as required, to enter upon the Subject Property for the limited purpose of inspecting the specific site and access that are the subject of Applicant's proposed installation.

Sincerely,

GUILFORD AGRICULTURAL SOCIETY

By:   
David Popolizio (Jun 5, 2026 12:59:35 EDT)

Name: David Popolizio

Title: Vice president

Date: Jun 5, 2026

# **ATTACHMENT 2**

# SITE NAME: GUILFORD\_CT\_FAIR\_COW\_2026

111 LOVERS LANE  
GUILFORD, CT 06437



PROJ: 111 LOVERS LANE  
DATE: 10/20/2025

FIELD INSPECTIONS	
REV. DATE	DESCRIPTION

SUBMITTALS	
REV. DATE	DESCRIPTION

REV. DATE	DESCRIPTION	BY	RP
0	10/20/2025		

SITE NAME:  
**GUILFORD\_CT\_FAIR\_COW\_2026**

SITE ADDRESS:  
111 LOVERS LANE  
GUILFORD, CT 06437  
NEW HAVEN COUNTY

FUZE NUMBER:  
17662676

MDG ID:  
5000969722

SHEET TITLE:  
**LOCATION PLAN**

SHEET NUMBER:  
**L-1**

SHEET NUMBER	DESCRIPTION	REV.
L-1	LOCATION PLAN / AERIAL IMAGE	0
L-2	SITE PLAN	0
L-3	ENLARGED SITE PLAN	0
L-4	ELEVATION & ANTENNA PLAN	0

1  
L-1

LOCATION PLAN  
SCALE: N.T.S.



SITE CONTROL POINT:  
LATITUDE: 41°16'51.8"N (41.281042)  
LONGITUDE: 72°40'29.0"W (-72.674708)  
APPROX. GROUND ELEV.: ± 9' AMSL



Bechtel Burtch Matters



SAI CONSULTING INC.

FIELD INSPECTIONS

REV. DATE:	DESCRIPTION:	BY:

SUBMITTALS

REV. DATE:	DESCRIPTION:	BY:
0	ISSUANCE	LESTER WILSON

SITE NAME:

GUILFORD CT FAIR  
\_COW\_2026

SITE ADDRESS:  
111 LOWELL LANE  
GUILFORD CT  
NEW HAVEN COUNTY

FUZE NUMBER:  
17662676


MDG ID:  
5000969722

SHEET TITLE:

SITE PLAN

SHEET NUMBER:

L-2

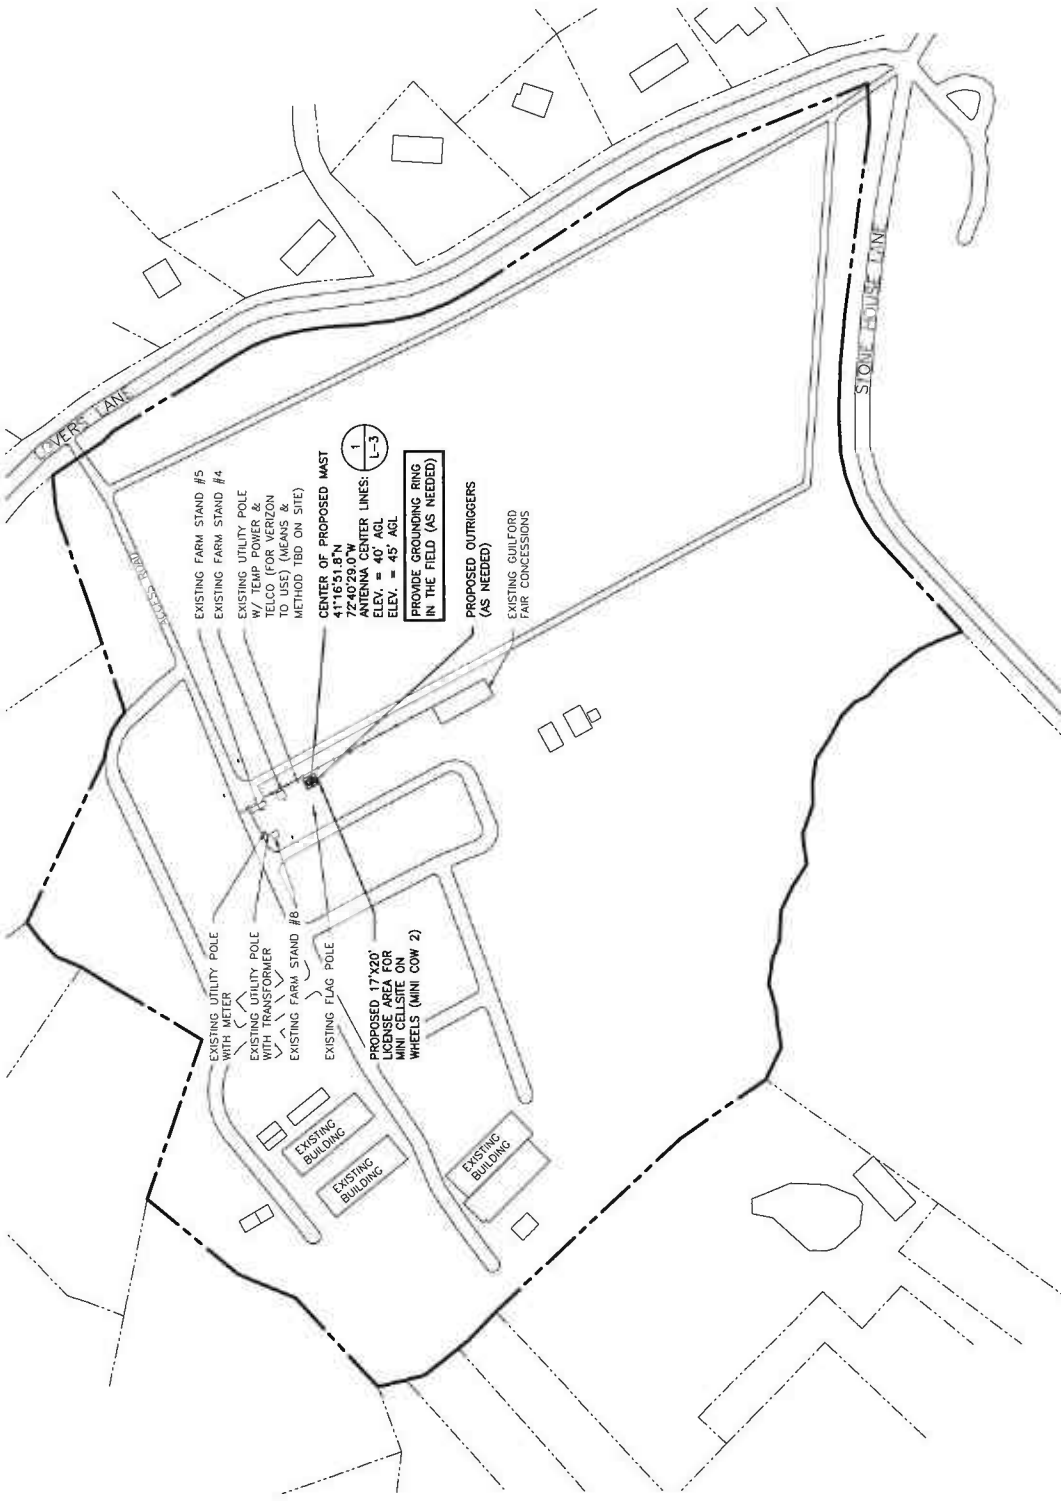

1  
L-2

SITE PLAN  
SCALE: N.T.S.



NOTE: INSTALL GROUND RUBBER  
CONDUIT RACKWAYS TO PROTECT ANY  
EXPOSED CONDUITS AND TO AVOID  
TRIPPING HAZARD.

SITE CONTROL POINT:  
LATITUDE: 41°16'51.8"N (41.281042)  
LONGITUDE: 72°40'29.0"W (-72.674708)  
APPROX. GROUND ELEV.: ± 9' AMSL.



Because Better Matters™



UNIVERSITY MICROFILMS  
SERIALS ACQUISITION  
300 N ZEEB RD  
ANN ARBOR MI 48106-1500

FIELD INSPECTIONS

REV#	DATE	DESCRIPTION	BY

SUBMITTALS

REV#	DATE	DESCRIPTION	BY

SITE NAME:

GUILFORD\_CT\_FAIR  
\_COW\_2026

SITE ADDRESS:  
111 CORDELL RD  
GUILFORD CT 06430  
NEW HAVEN COUNTY

PLUZE NUMBER:  
17662676


MDG ID:  
5000969722

SHEET TITLE:

ENLARGED SITE PLAN


SHEET NUMBER:

L-3

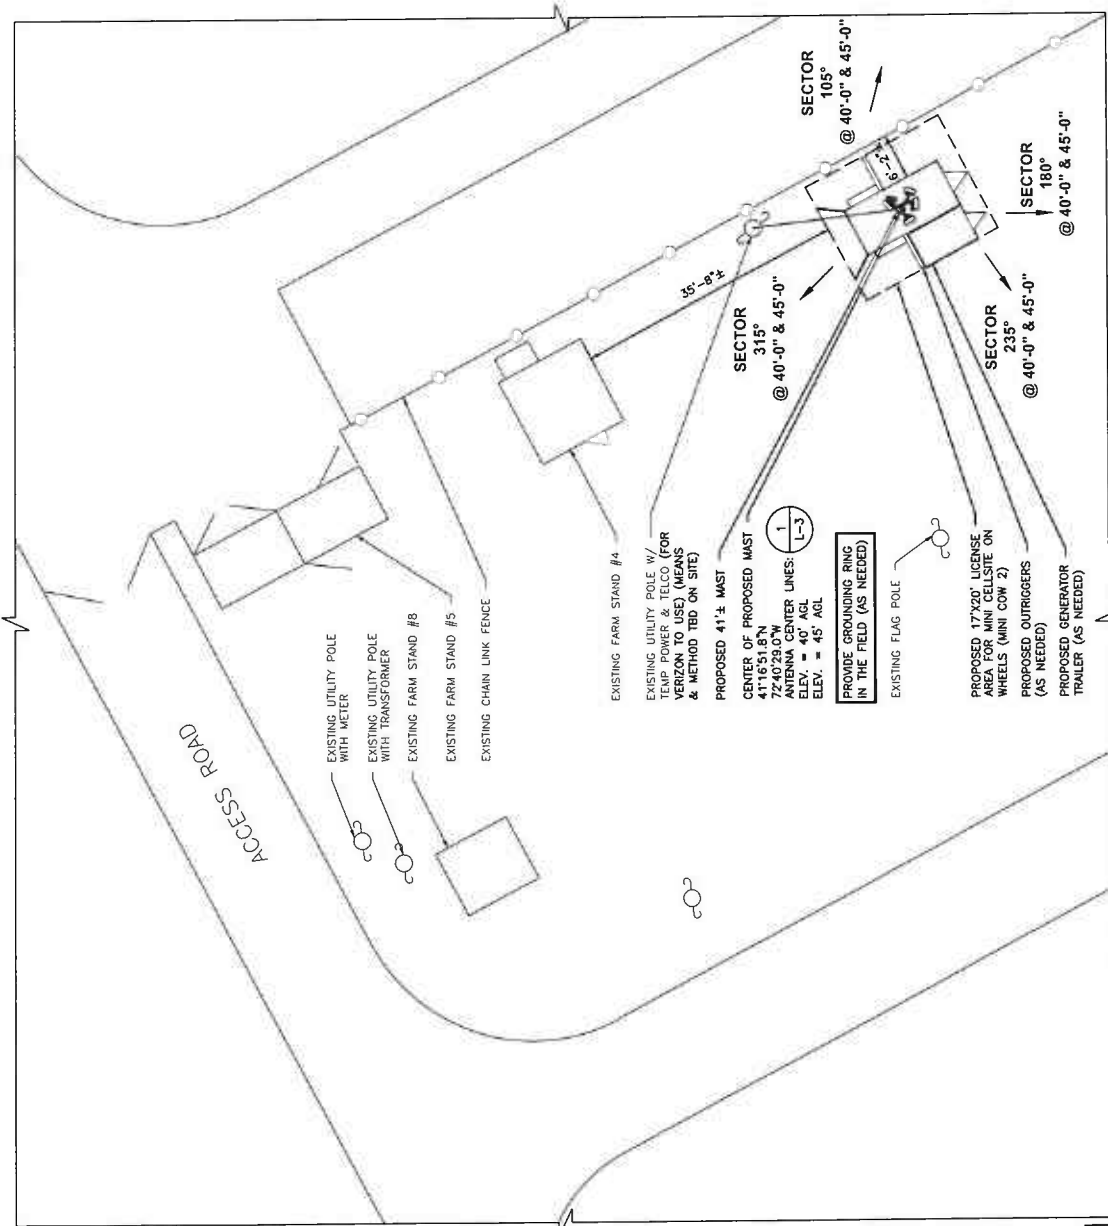

EXISTING FARM STAND #4  
 EXISTING UTILITY POLE W/ VERIZON TO USE (LEANS & METHOD TBD ON SITE)  
 PROPOSED 41' ± MAST  
 CENTER OF PROPOSED MAST  
 41°16'51.8"N  
 72°40'29.0"W  
 ANTENNA CENTER LINES:  
 ELEV. = 40' AGL  
 ELEV. = 45' AGL

PROVIDE GROUNDING RING IN THE FIELD (AS NEEDED)  
 EXISTING FLAG POLE  
 PROPOSED 17'X20' LICENSE AREA FOR MINI COW 2) WHEELS (MINI COW 2)  
 PROPOSED OUTRIGGERS (AS NEEDED)  
 PROPOSED GENERATOR TRAILER (AS NEEDED)



ENLARGED SITE PLAN  
 1  
 L-3  
 22X34 SCALE: 1/16"=1'-0"  
 11X17 SCALE: 1/32"=1'-0"

NOTE: INSTALL GROUND RUBBER CONDUIT RACEWAYS TO PROTECT ANY EXPOSED CONDUITS AND TO AVOID TRIPPING HAZARD  
 SITE CONTROL POINT:  
 LATITUDE: 41°16'51.8"N (41.281042)  
 LONGITUDE: 72°40'29.0"W (-72.674708)  
 APPROX. GROUND ELEV.: ± 9' AMSL




**SAMSUNG**

# **SAMSUNG** C-Band 64T64R Massive MIMO Radio

for High Capacity and Wide Coverage

Samsung C-Band 64T64R Massive MIMO Radio enables mobile operators to increase coverage range, boost data speeds and ultimately offer enriched 5G experiences to users in the U.S.

Model Code: MT6407-77A

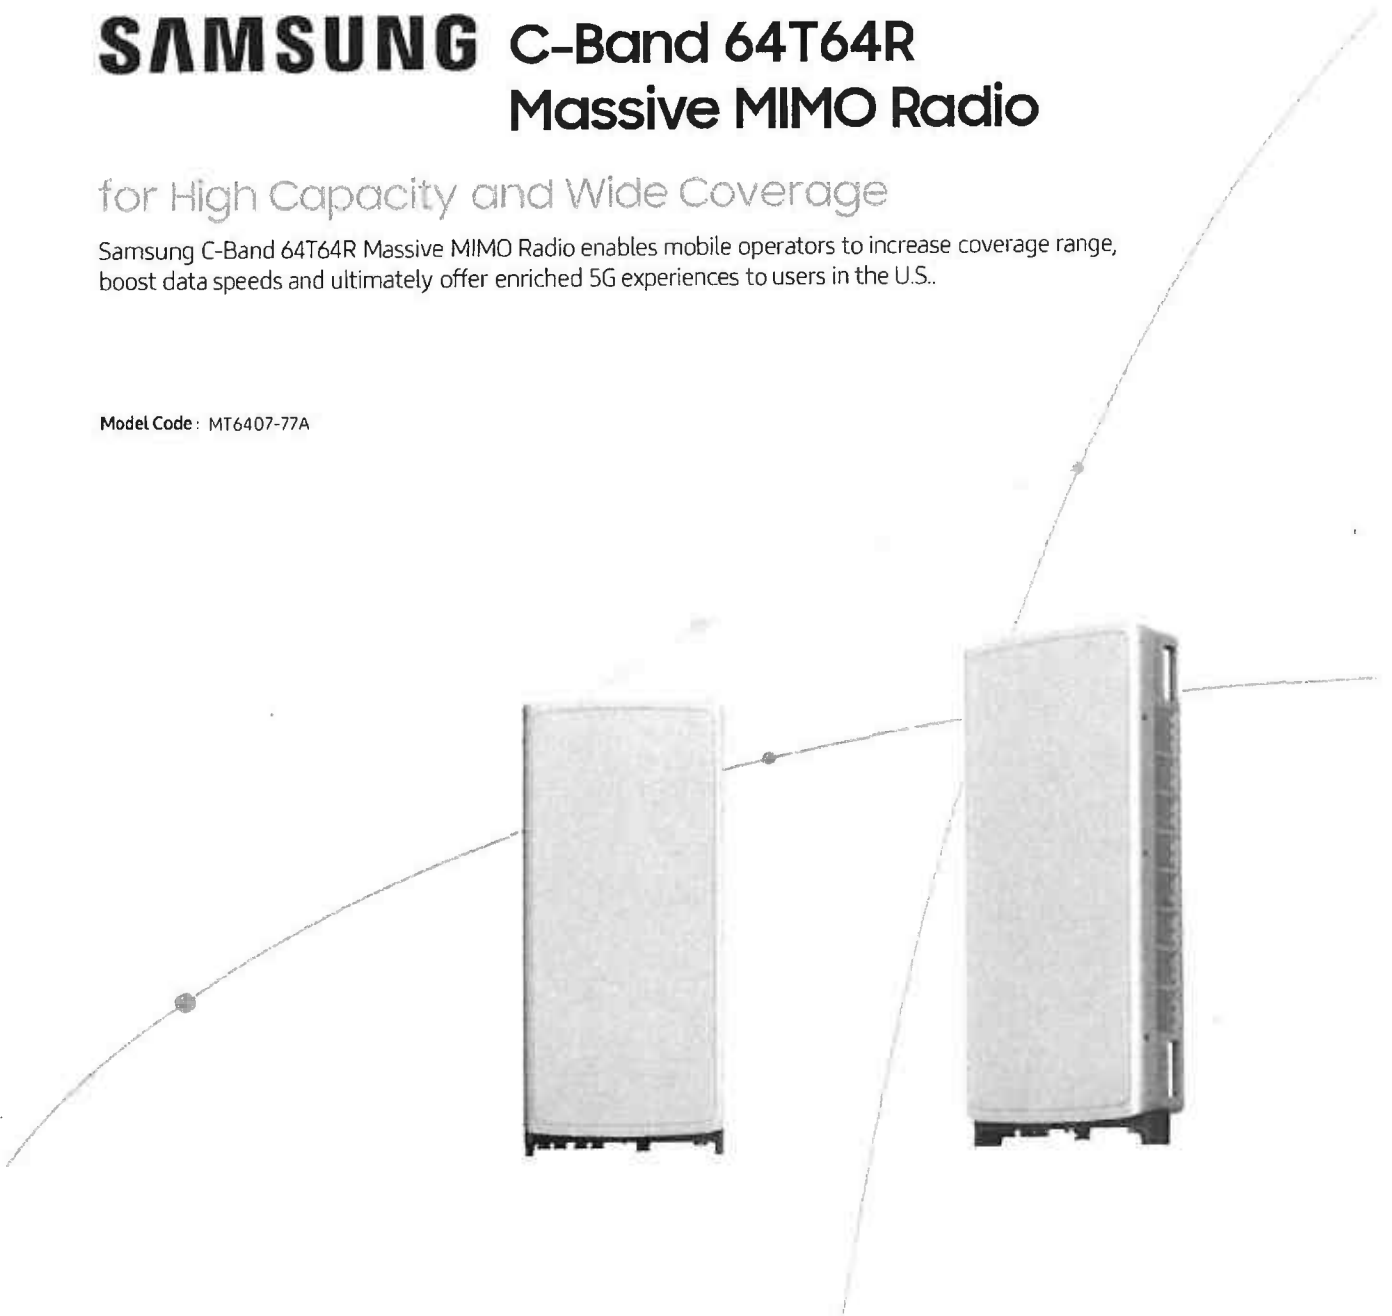


## Points of Differentiation

### Wide Bandwidth

With capability to support up to 2 CC carrier configuration, Samsung C-Band massive MIMO Radio supports 200 MHz bandwidth in the C-Band spectrum.

Samsung C-Band massive MIMO Radio covers the entire C-Band 280 MHz spectrum, so it can meet the operator's needs in current A block and future B/C blocks

C-Band spectrum supported by Massive MIMO Radio

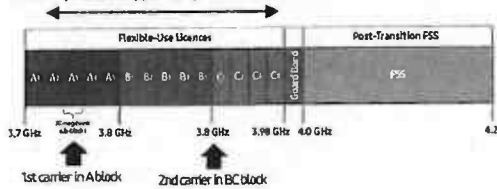

### Enhanced Performance

C-Band massive MIMO Radio creates sharp beams and extends networks' coverage on the critical mid-band spectrum using a large number of antenna elements and high output power to boost data speeds.

This helps operators reduce their CAPEX as they now need less products to cover the same area than before.


Furthermore, as C-Band massive MIMO Radio supports MU-MIMO (Multi-user MIMO), it enables to increase user throughput by minimizing interference.



### Future Proof Product

Samsung C-Band 64T64R Massive MIMO radio supports not only CPRI but also eCPRI as front-haul interface.


It enables operators can cut down on OPEX/CAPEX by reducing front-haul bandwidth through low layer split and using ethernet based higher efficient line.

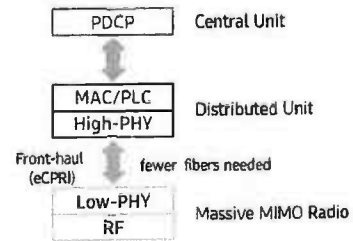

### Well Matched Design

Samsung C-Band Massive MIMO radio utilizes 64 antennas, supports up to 280MHz bandwidth, and delivers a 200W output power. Despite the above advanced performance, the Radio has a compact size of 50.9L and 79.4lbs. This makes it easy to install the Radio.

It is designed to look solid and compact, with a low profile appearance so that, when installed, harmonizes well with the surrounding environment.



## Technical Specifications

Item	Specification
Tech	NR
Band	n77
Frequency Band	3700-3980 MHz
EIRP	78.5dBm (53.0 dBm+25.5 dBi)
IBW/OBW	280 MHz / 200 MHz
Installation	Pole/Wall
Size/Weight	16.06 x 35.06 x 5.51 inch (50.86L)/ 79.4 lbs

# NNH4SS-45A-R3BT8



16-port sector antenna, 4x 698–896, 8x 1695–2360 and 4x 3550–3700 MHz, 45° HPBW, 3x RETs and 3x SBTs.

- Features broadband Low Band (698-896 MHz), Mid Band(1695-2360 MHz) and High Band (3550-3700 MHz) arrays for 4T4R (4X MIMO) capability for bands 5, 13, 25, 66 and 48. Also covers bands 12, 14, 29, and 30
- Perfect antenna to add 3.5GHz CBRS to macro sites
- Array configuration provides capability for 4T4R (4X MIMO) on Low Band, dual 4T4R (4X MIMO) on Mid Band and 4T4R (4X MIMO) on High Band
- Excellent wind loading characteristics
- Non-stacked mid band array design provides higher gain and narrower vertical beamwidth than traditional antenna designs

## General Specifications

<b>Antenna Type</b>	Sector
<b>Band</b>	Multiband
<b>Color</b>	Light Gray (RAL 7035)
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage
<b>Radome Material</b>	Fiberglass, UV resistant
<b>Radiator Material</b>	Low loss circuit board
<b>Reflector Material</b>	Aluminum
<b>RF Connector Location</b>	Bottom
<b>RF Connector Quantity, high band</b>	4
<b>RF Connector Quantity, mid band</b>	8
<b>RF Connector Quantity, low band</b>	4
<b>RF Connector Quantity, total</b>	16

## Remote Electrical Tilt (RET) Information

<b>RET Hardware</b>	CommRET v2
<b>RET Interface</b>	8-pin DIN Female   8-pin DIN Male
<b>RET Interface, quantity</b>	3 female   3 male
<b>Input Voltage</b>	10–30 Vdc
<b>Internal Bias Tee</b>	Port 1   Port 5   Port 7


# NNH4SS-45A-R3BT8

<b>Internal RET</b>	Low band (1)   Mid band (2)
<b>Power Consumption, active state, maximum</b>	10 W
<b>Power Consumption, idle state, maximum</b>	2 W
<b>Protocol</b>	3GPP/AISG 2.0

## Dimensions

<b>Width</b>	457 mm   17.992 in
<b>Depth</b>	178 mm   7.008 in
<b>Length</b>	1399 mm   55.079 in
<b>Net Weight, antenna only</b>	29.5 kg   65.036 lb


## Array Layout



Array ID	Frequency (MHz)	RF Connector	RET (SRET)	AISG No.	AISG RET UID
A	698-896	1 - 2	1	AISG1	CPxxxxxxxxxxxxxxxxR1
	698-896	3 - 4			
Y1	1695-2360	5 - 6	2	AISG2	CPxxxxxxxxxxxxxxxxY1
		9 - 10			
Y2	1695-2360	7 - 8	3	AISG3	CPxxxxxxxxxxxxxxxxY2
		11 - 12			
B	3550-3700	13 - 14	N/A	NA	N/A
	3550-3700	15 - 16			

(Sizes of colored boxes are not true depiction of array sizes)

## Port Configuration

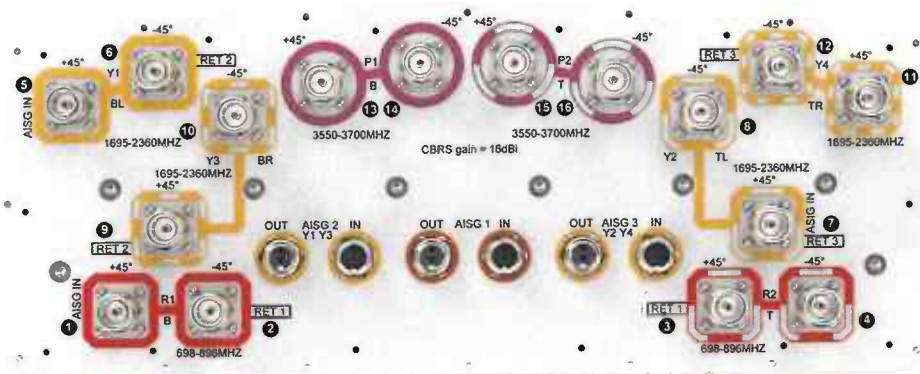

## Electrical Specifications

# NNH4SS-45A-R3BT8

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	1695 – 2360 MHz   3550 – 3700 MHz   698 – 896 MHz
<b>Polarization</b>	±45°
<b>Total Input Power, maximum</b>	1,600 W @ 50 °C

## Electrical Specifications

	<b>R1,R2</b>	<b>R1,R2</b>	<b>Y1-Y4</b>	<b>Y1-Y4</b>	<b>Y1-Y4</b>	<b>Y1-Y4</b>	<b>P1,P2</b>
<b>Frequency Band, MHz</b>	<b>698–806</b>	<b>806–896</b>	<b>1695–1880</b>	<b>1850–1990</b>	<b>1920–2180</b>	<b>2300–2360</b>	<b>3550–3700</b>
<b>RF Port</b>	1-4	1-4	5-12	5-12	5-12	5-12	13-16
<b>Gain, dBi</b>	12.7	13.3	15.3	15.7	16.3	16.5	15
<b>Beamwidth, Horizontal, degrees</b>	48	44	44	41	39	37	45
<b>Beamwidth, Vertical, degrees</b>	36	30.4	14.5	13.6	12.8	11.1	15.6
<b>Beam Tilt, degrees</b>	2–18	2–18	0–10	0–10	0–10	0–10	8
<b>USLS (First Lobe), dB</b>	19	17	16	17	16	15	16
<b>Front-to-Back Ratio at 180°, dB</b>	33	30	31	32	31	30	31
<b>CPR at Boresight, dB</b>	20	20	17	18	18	20	14
<b>Isolation, Cross Polarization, dB</b>	25	25	25	25	25	25	25
<b>Isolation, Inter-band, dB</b>	25	25	25	25	25	25	25
<b>VSWR   Return loss, dB</b>	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
<b>PIM, 3rd Order, 2 x 20 W, dBc</b>	-153	-153	-153	-153	-153	-153	-145
<b>Input Power per Port at 50°C, maximum, watts</b>	300	300	250	250	250	200	100

## Mechanical Specifications

<b>Effective Projective Area (EPA), frontal</b>	0.74 m <sup>2</sup>   7.965 ft <sup>2</sup>
<b>Effective Projective Area (EPA), lateral</b>	0.15 m <sup>2</sup>   1.615 ft <sup>2</sup>
<b>Wind Loading @ Velocity, frontal</b>	788.0 N @ 150 km/h (177.1 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	159.0 N @ 150 km/h (35.7 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, maximum</b>	788.0 N @ 150 km/h (177.1 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	692.0 N @ 150 km/h (155.6 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241 km/h (150 mph)

## Packaging and Weights

# NNH4SS-45A-R3BT8

---

<b>Width, packed</b>	526 mm   20.709 in
<b>Depth, packed</b>	283 mm   11.142 in
<b>Length, packed</b>	1566 mm   61.654 in
<b>Weight, gross</b>	41.9 kg   92.374 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant




## Included Products

BSAMNT-3	-	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

## \* Footnotes

<b>Performance Note</b>	Severe environmental conditions may degrade optimum performance
-------------------------	---

# NNH4SS-65A-R3BT8



16- Port sector antenna, 4x 698-896, 8x 1695-2360 and 4x 3550-3700MHz, 65° HPBW, 3x RETs and 3x SBTs

- Features broadband Low Band (698-896 MHz), Mid Band(1695-2360 MHz) and High Band (3550-3700 MHz) arrays for 4T4R (4X MIMO) capability for bands 5, 13, 25, 66 and 48. Also covers bands 12, 14, 29, and 30
- Perfect antenna to add 3.5GHz CBRS to macro sites
- Non-stacked mid band array design provides higher gain and narrower vertical beamwidth than traditional antenna designs
- Array configuration provides capability for 4T4R (4X MIMO) on Low Band, dual 4T4R (4X MIMO) on Mid Band and 4T4R (4X MIMO) on High Band)
- Excellent wind loading characteristics

## General Specifications

<b>Antenna Type</b>	Sector
<b>Band</b>	Multiband
<b>Color</b>	Light Gray (RAL 7035)
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage
<b>Radome Material</b>	Fiberglass, UV resistant
<b>Radiator Material</b>	Low loss circuit board
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	4.3-10 Female
<b>RF Connector Location</b>	Bottom
<b>RF Connector Quantity, high band</b>	4
<b>RF Connector Quantity, mid band</b>	8
<b>RF Connector Quantity, low band</b>	4
<b>RF Connector Quantity, total</b>	16

## Remote Electrical Tilt (RET) Information

<b>RET Hardware</b>	CommRET v2
<b>RET Interface</b>	8-pin DIN Female   8-pin DIN Male
<b>RET Interface, quantity</b>	3 female   3 male
<b>Input Voltage</b>	10-30 Vdc


# NNH4SS-65A-R3BT8

<b>Internal Bias Tee</b>	Port 1   Port 5   Port 9
<b>Internal RET</b>	Low band (1)   Mid band (2)
<b>Power Consumption, active state, maximum</b>	10 W
<b>Power Consumption, idle state, maximum</b>	2 W
<b>Protocol</b>	3GPP/AISG 2.0 (Single RET)

## Dimensions

<b>Width</b>	498 mm   19.606 in
<b>Depth</b>	197 mm   7.756 in
<b>Length</b>	1499 mm   59.016 in
<b>Net Weight, antenna only</b>	31 kg   68.343 lb

## Array Layout




Array ID	Frequency (MHz)	RF Connector	RET (SRET)	AISG No.	AISG RET UID
R1	698-896	1 - 2	1	AISG1	CPxxxxxxxxxxxxxxxxR1
R2	698-896	3 - 4			
Y1	1695-2360	5 - 6	2	AISG2	CPxxxxxxxxxxxxxxxxY1
Y2	1695-2360	7 - 8			
Y3	1695-2360	9 - 10			
Y4	1695-2360	11 - 12			
R3	3550-3700	13 - 14	N/A	NA	N/A
R4	3550-3700	15 - 16			

(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration

# NNH4SS-65A-R3BT8

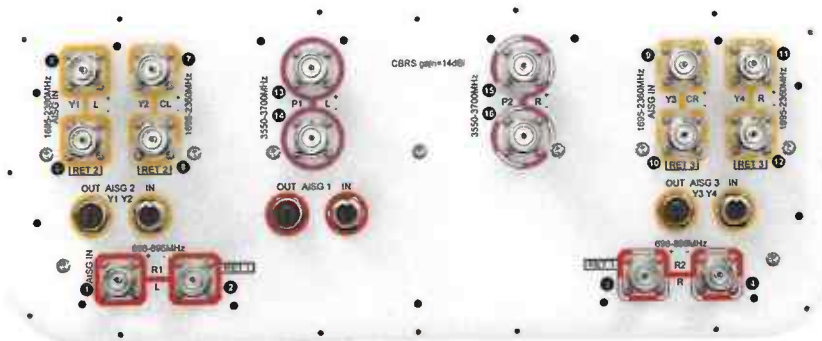

## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	1695 – 2360 MHz   3550 – 3700 MHz   698 – 896 MHz
<b>Polarization</b>	±45°
<b>Total Input Power, maximum</b>	1,600 W @ 50 °C

## Electrical Specifications

	<b>R1,R2</b>	<b>R1,R2</b>	<b>Y1-Y4</b>	<b>Y1-Y4</b>	<b>Y1-Y4</b>	<b>Y1-Y4</b>	<b>P1,P2</b>
<b>Frequency Band, MHz</b>	<b>698–806</b>	<b>806–896</b>	<b>1695–1880</b>	<b>1850–1990</b>	<b>1920–2180</b>	<b>2300–2360</b>	<b>3550–3700</b>
<b>RF Port</b>	1-4	1-4	5-12	5-12	5-12	5-12	13-16
<b>Gain, dBi</b>	13.1	13.4	15.8	16.5	17.3	17.8	13.8
<b>Beamwidth, Horizontal, degrees</b>	72	64	71	69	63	59	66
<b>Beamwidth, Vertical, degrees</b>	17.2	15	8	7.4	7	6.3	17.3
<b>Beam Tilt, degrees</b>	2–16	2–16	2–12	2–12	2–12	2–12	8
<b>USLS (First Lobe), dB</b>	19	15	14	16	16	18	19
<b>Front-to-Back Ratio at 180°, dB</b>	30	28	32	32	32	33	35
<b>CPR at Boresight, dB</b>	21	22	20	21	23	24	23

# NNH4SS-65A-R3BT8

<b>Isolation, Cross Polarization, dB</b>	25	25	25	25	25	25	25
<b>Isolation, Inter-band, dB</b>	25	25	25	25	25	25	25
<b>VSWR   Return loss, dB</b>	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
<b>PIM, 3rd Order, 2 x 20 W, dBc</b>	-153	-153	-153	-153	-153	-153	-145
<b>Input Power per Port at 50°C, maximum, watts</b>	300	300	250	250	250	200	100

## Mechanical Specifications

<b>Wind Loading @ Velocity, frontal</b>	498.0 N @ 150 km/h (112.0 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	148.0 N @ 150 km/h (33.3 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, maximum</b>	597.0 N @ 150 km/h (134.2 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	342.0 N @ 150 km/h (76.9 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241 km/h (150 mph)

## Packaging and Weights

<b>Width, packed</b>	565 mm   22.244 in
<b>Depth, packed</b>	309 mm   12.165 in
<b>Length, packed</b>	1686 mm   66.378 in
<b>Weight, gross</b>	43.7 kg   96.342 lb

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

- BSAMNT-3 - Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

## \* Footnotes


**Performance Note** Severe environmental conditions may degrade optimum performance

# NNH4SS-65A-R3BT8

---

# [CBRS] Clip-on Antenna Specifications

VzW accepted IP45 in FLD, but IP55 is Samsung Spec.

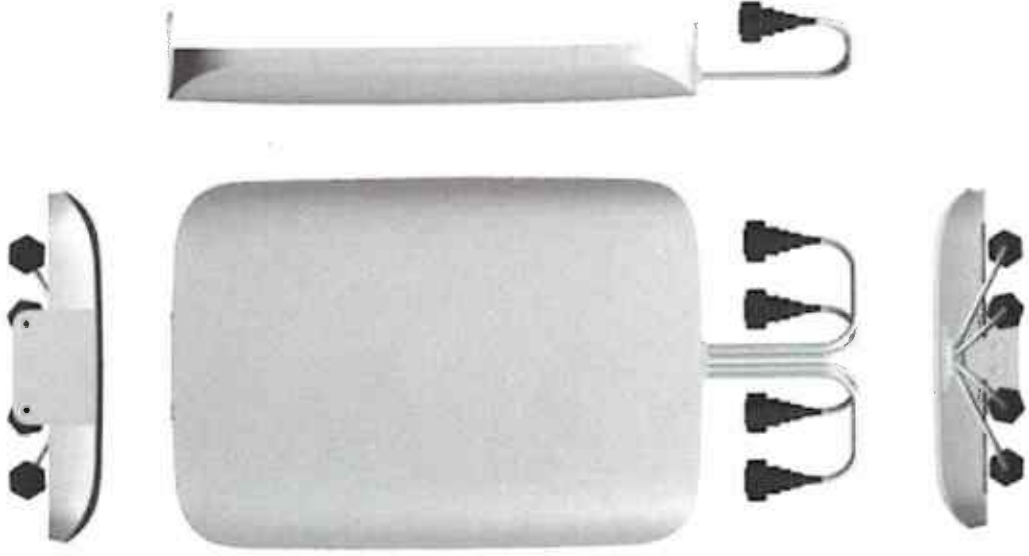


Items	Clip-on Antenna, <b>BASTA**</b>
Antenna Gain	$12.5 \pm 0.5$ dBi (Max 13 dBi)
Horizontal BW (-3dB)	$65^\circ \pm 5^\circ$
Vertical BW (-3dB)	$17^\circ \pm 3^\circ$
Electrical Tilt	$8^\circ$ (fixed) $\pm 2^\circ$
Front-to-Back Ratio	> 25 dB
Port-to-Port Tracking	< 3 dB
VSWR	< 1.5
Isolation	> 25 dB
<b>Ingress Protection</b>	<b>IP55</b>
Size	220(W) x 313(H) x 34.3(D) mm (*) (8.7 x 12.3 x 1.4 inch.)
Weight	< 2.0 kg [Typ. 1.3 kg]
It is required that the radio should be weatherproofed properly with JMA WPS Boot with external antenna or with Weatherproof Boot for clip-on antennas.	

Antenna includes integrated cable with connector  
 \* Design is subject to minor change

\*\* Ant. spec. follows NGMN recommendations on Base Station Antenna Standards (BASTA). For example, 'mean  $\pm$  tolerance of 86.6%' is applied to double-sided specification of statistical RF parameters.

# [CBRS RRH] Spec.

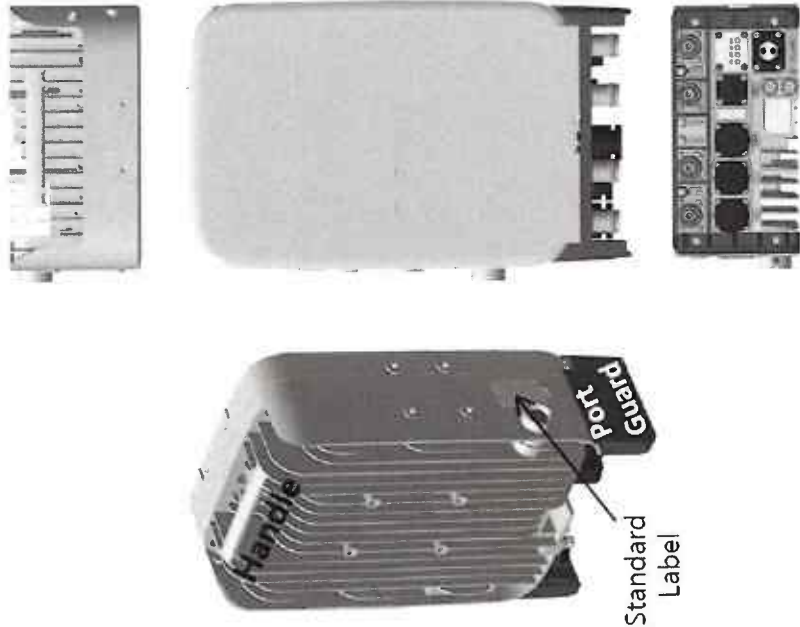

Current Size: 216 x 307 x 105.5 mm (6.99L)  
 (8.5 x 12.1 x 4.1 inch., excluding Port Guard)

Design is subject to minor change

Item	Specification
Band	Band 48 (3.5 GHz)
Frequency	3550~3700 MHz
IBW	150 MHz
OBW	80 MHz
# of Carriers	5/10/15/20 MHz x 4 carriers
RF Chain	4TX / 4RX
RF Output Power & EIRP	4 path x 5 W (Total: 20 W = 43 dBm) (EIRP: 47 dBm / 10 MHz)
RX Sensitivity	Typical : -101.5 dBm @ 1 Rx (3GPP 36.104, Wide Area)
Modulation	256-QAM support (1024-QAM with 1~2dB power back-off) -48 VDC (-38 to -57 VDC, 1 SKU), with clip-on AC-DC converter (Option)
Input Power	with clip-on AC-DC converter (Option)
Power Consumption	About 160 Watt @ 100% RF load, typical conditions
Volume	<b>Under 7L</b> (w/o Antenna), Under 9.6L (with antenna)
Weight	<b>Under 8.0 kg (18.64 lb)</b> (w/o Antenna), Under 10.5 Kg (with ant.)
Operating Temperature	-40°C (-40°F) ~ 55°C (131°F) (W/o solar load)
Cooling	Natural convection
Unwanted Emission	3GPP 36.104 Category A [B48] : FCC 47 CFR 96.41 e)
Optic Interface	20km, 2 ports (9.8Gbps x 2), SFP, single mode, duplex or Bi-Di
CPRI Cascade	Not supported
# of Antenna Port	4
External Alarm (UDA)	4
RET	AISG 2.2
TMA & built-in Bias-T I//F and PIM cancellation	Not supported
Mounting Options	Pole, wall, tower, back to back, side by side (for external ant), <b>3 RRH with Clip-on Antenna on the pole</b>
Antenna Type	Integrated (Clip-on) antenna (Option), External antenna (Option)
NB-IoT	Not Supported (HW Resource reserved for 1 Guard Band NB-IoT per LTE carrier)
Spectrum Analyzer	TX/RX Support
External Alarm (UDA)	4
5G NR	Support with S/W upgrade
XRRAN	Support with S/W upgrade

# SAMSUNG

## AWS/PCS MACRO RADIO

DUAL-BAND AND HIGH POWER  
FOR MACRO COVERAGE

Samsung's future proof dual-band radio is designed to help effectively increase the coverage areas in wireless networks. This AWS/PCS 4T4R dual-band radio has 4Tx/4Rx to 2Tx/2Rx RF chains options and a total output power of 320W, making it ideal for macro sites.

Model Code RF4439d-25A



Homepage  
[samsungnetworks.com](http://samsungnetworks.com)




Youtube  
[www.youtube.com/samsung5g](http://www.youtube.com/samsung5g)

# Points of Differentiation

## Continuous Migration


Samsung's AWS/PCS macro radio can support each incumbent CPRI interface as well as advanced eCPRI interfaces. This feature provides installable options for both legacy LTE networks and added NR networks.

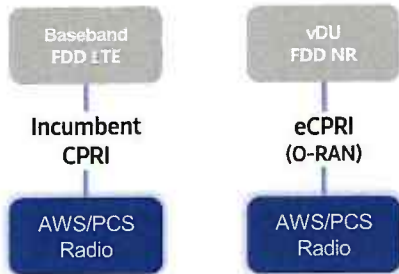

## O-RAN Compliant

A standardized O-RAN radio can help in implementing cost-effective networks, which are capable of sending more data without compromising additional investments.


Samsung's state-of-the-art O-RAN technology will help accelerate the effort toward constructing a solid O-RAN ecosystem.

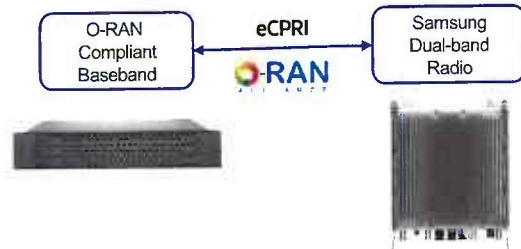

## Optimum Spectrum Utilization


The number of required carriers varies according to site (region). Supporting many carriers is essential for using all frequencies that the operator has available.

The new AWS/PCS dual-band radio can support up to 3 carriers in the PCS (1.9GHz) band and 4 carriers in the AWS (2.1GHz) band, respectively.

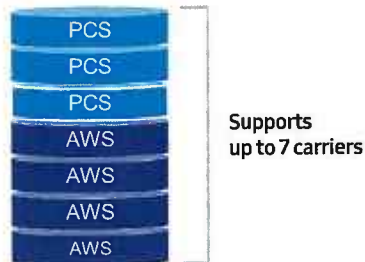

## Brand New Features in a Compact Size

Samsung's AWS/PCS macro radio offers several features, such as dual connectivity for baseband for both CDU and vDU, O-RAN capability, more carriers and an enlarged PCS spectrum, combined into an incumbent radio volume of 36.8L.

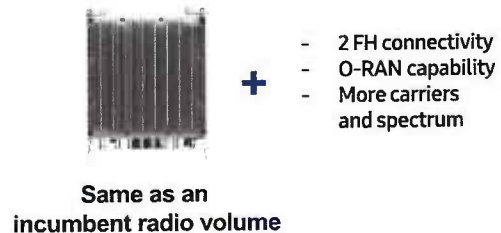

# Technical Specifications

Item	Specification
Tech	LTE / NR
Brand	B25(PCS), B66(AWS)
Frequency Band	DL: 1930 – 1995MHz, UL: 1850 – 1915MHz DL: 2110 – 2200MHz, UL: 1710 – 1780MHz
RF Power	(B25) 4 × 40W or 2 × 60W (B66) 4 × 60W or 2 × 80W
IBW/OBW	(B25) 65MHz / 30MHz (B66) DL 90MHz, UL 70MHz / 60MHz
Installation	Pole, Wall
Size/Weight	14.96 x 14.96 x 10.04inch (36.8L) / 74.7lb

# SAMSUNG

## 700/850MHZ MACRO RADIO

DUAL-BAND AND HIGH POWER  
FOR MACRO COVERAGE

Samsung's future proof dual-band radio is designed to help effectively increase the coverage areas in wireless networks. This 700/850MHz 4T4R dual-band radio has 4Tx/4Rx to 2Tx/2Rx RF chains options and a total output power of 320W, making it ideal for macro sites.

Model Code RF4440d-13A



Homepage  
[samsungnetworks.com](http://samsungnetworks.com)




Youtube  
[www.youtube.com/samsung5g](http://www.youtube.com/samsung5g)

# Points of Differentiation

## Continuous Migration


Samsung's 700/850MHz macro radio can support each incumbent CPRI interface as well as an advanced eCPRI interface. This feature provides installable options for both legacy LTE networks and added NR networks.

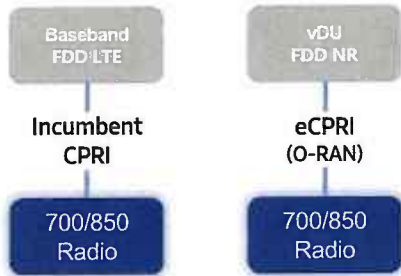

## O-RAN Compliant

A standardized O-RAN radio can help when implementing cost-effective networks because it is capable of sending more data without compromising additional investments.


Samsung's state-of-the-art O-RAN technology will help accelerate the effort toward constructing a solid O-RAN ecosystem.

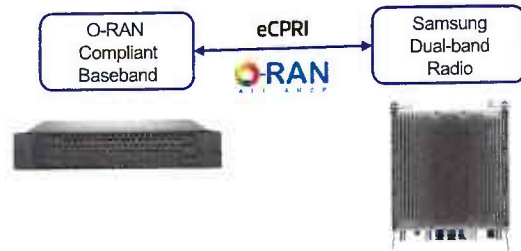

## Optimum Spectrum Utilization

The number of required carriers varies according to site (region). The ability to support many carriers is essential for using all frequencies that the operator has available.


The new 700/850MHz dual-band radio can support up to 2 carriers in the B13 (700MHz) band and 3 carriers in the B5 (850MHz) band, respectively.

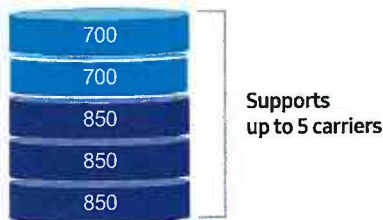

## Secured Integrity

Access to sensitive data is allowed only to authorized software.

The Samsung radio's CPU can protect root of trust, which is credential information to verify SW integrity, and secure storage provides access control to sensitive data by using dedicated hardware (TPM).

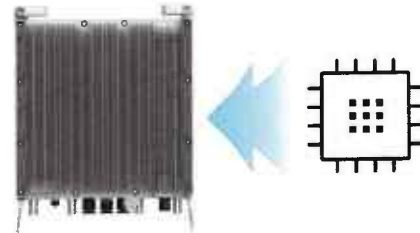

# Technical Specifications

Item	Specification
Tech	LTE / NR
Brand	B13(700MHz), B5(850MHz)
Frequency Band	DL: 746 – 756MHz, UL: 777 – 787MHz DL: 869 – 894MHz, UL: 824 – 849MHz
RF Power	(B13) 4 × 40W or 2 × 60W (B5) 4 × 40W or 2 × 60W
IBW/OBW	(B13) 10MHz / 10MHz (B5) 25MHz / 25MHz
Installation	Pole, Wall
Size/Weight	14.96 x 14.96 x 9.05inch (33.2L) / 70.33 lb

# Specifications

The table below outlines the main specifications of the RRH.

**Table 1. Specifications**

Item	RT4401-48A
Air Technology	LTE
Band	Band 48 (3.5 GHz)
Operating Frequency (MHz)	3550 to 3700
RF Chain	4TX/4RX
Input Power	-48 V DC (-38 to -57 V DC, 1 SKU), with clip-on AC-DC converter (Option)
Dimension (W × D × H) (mm)	8.55 in. (217.4) × 4.15 in. (105.5) × 13.91 in. (353.5) * RRH only 11.39 in. (289.4) × 5.45 in. (138.5) × 16.16 in. (410.5) * with Clip-on antenna, AC-DC power unit
Cooling	Natural convection
Unwanted Emission	3GPP 36.104 Category A [B48]: FCC 47 CFR 96.41 e)
Spectrum Analyzer	TX/RX Support
Antenna Type	Integrated (Clip-on) antenna (Option), External antenna (Option)
Operating Humidity	5 to 100 [%] (RH), condensing, not to exceed 30 g/m <sup>3</sup> absolute humidity
Altitude	-60 to 1,800 m
Earthquake	Telcordia Earthquake Risk Zone4 (Telcordia GR-63-CORE)
Vibration in Use	Office Vibration
Transportation Vibration	Transportation Vibration
Noise	Fanless (natural convection cooling)
Wind Resistance	Telcordia GR-487-CORE, Section 3.34
EMC	FCC Title 47, CFR Part 96
Safety	UL 60950-1 2nd ED

---

Item	RT4401-48A
	UL 62368-1 UL 60950-22
RF	FCC Title 47, CFR Part 96

The table below outlines the AC/DC power unit specifications of the RRH system.

# **ATTACHMENT 3**

\*Guidelines adopted by the FCC on August 1, 1996, 47 CFR Section 1.1310 based on NCRP Report 86, 1986 and generally on ANSI/IEEE C95.1-1992


MHz = Megahertz  
 mW/cm<sup>2</sup> = milliwatts per square centimeter  
 ERP = Effective Radiated Power

Absolute worst case maximum values used, including the following assumptions:

1. closest accessible point is distance from antenna to base of pole;
2. continuous transmission from all available channels at full power for indefinite time period;
3. calculation takes into account a point of interest of 2m or 6.56ft

Location	Guilford CT Fair 2026 Temp				
Date	6/15/2026				
Band	C-Band	CBRS	AWSS	PCS	700
Operating Frequency (MHz)	3,700	3,550	2,145	1,970	869
General Population MPE (mW/cm <sup>2</sup> )	1	1	1	1	0.497333333
ERP Per Transmitter (Watts)	33,668	50	3,785	2,090	1,186
Number of Transmitters	2	4	4	4	4
Antenna Centerline (CL) (feet)	40	40	45	45	45
Total ERP (Watts)	67,376	200	15,140	8,360	4,744
Total ERP (dBm)	78	53	72	69	67
<b>75.22%</b>					

### RF Exposure 6.56ft. Above Ground Level Far Field Formula (per FCC OET65)

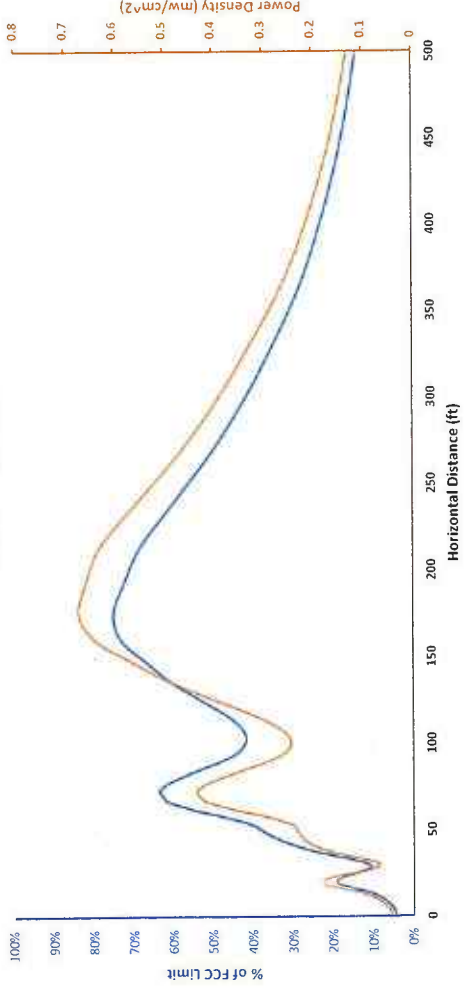

Angle Below Horizon	C-Band	CBRS	AWSS	PCS	700 MHz	39GHz 28GHz	C-Band	CBRS	AWSS	PCS	Cellular CDMA	700 MHz	Distance	Total Pop Density (mW/cm <sup>2</sup> )	Total General
90	0.041287304	2E-05	0.000473061	0.000268215	0.000605929	0.000401359	0.000000000	0.000000000	0.0413	0.0000	0.04	0.03	0	0.043009221	4.39%
89	0.041274304	3E-05	0.00055757	0.000262047	0.000679702	0.000460712	0.000000000	0.000000000	4.13%	0.00%	0.06%	0.03%	0.09%	0.043262403	4.42%
88	0.041195815	3E-05	0.000557171	0.000238819	0.000762092	0.00052859	0.000000000	0.000000000	4.22%	0.00%	0.06%	0.02%	0.13%	0.044312535	4.54%
87	0.041219389	3E-05	0.000638956	0.000235594	0.000815623	0.000593381	0.000000000	0.000000000	4.21%	0.00%	0.06%	0.03%	0.12%	0.04464837	4.57%
86	0.043015674	4E-05	0.00108523	0.000368829	0.000872496	0.000648448	0.000000000	0.000000000	4.30%	0.00%	0.11%	0.04%	0.13%	0.046049959	4.73%
85	0.0428893706	4E-05	0.001753114	0.000508031	0.00080909	0.000693331	0.000000000	0.000000000	4.29%	0.00%	0.14%	0.05%	0.14%	0.046780284	4.81%
84	0.043740626	5E-05	0.002358662	0.00062337	0.000791926	0.000740962	0.000000000	0.000000000	4.37%	0.00%	0.24%	0.06%	0.15%	0.04830091	4.96%
83	0.044575903	7E-05	0.00269967	0.000681383	0.000771488	0.000809918	0.000000000	0.000000000	4.46%	0.01%	0.27%	0.07%	0.17%	0.049606224	5.10%
82	0.0464556	1E-04	0.00269965	0.00074443	0.000669518	0.000864717	0.000000000	0.000000000	4.65%	0.01%	0.27%	0.10%	0.19%	0.052432383	5.37%
81	0.048092504	0.0002	0.003280694	0.001342908	0.000940396	0.001079186	0.000000000	0.000000000	4.81%	0.02%	0.33%	0.13%	0.22%	0.054307321	5.56%
80	0.048855041	0.0002	0.004050589	0.001721202	0.000954626	0.00123277	0.000000000	0.000000000	4.89%	0.02%	0.45%	0.06%	0.28%	0.056918863	5.84%
79	0.049658287	0.0003	0.006043902	0.002057775	0.000956653	0.00137546	0.000000000	0.000000000	4.97%	0.03%	0.60%	0.21%	0.32%	0.060665661	6.19%
78	0.050410708	0.0004	0.00722058	0.00242546	0.001010834	0.001569609	0.000000000	0.000000000	5.04%	0.03%	0.72%	0.22%	0.35%	0.06275579	6.51%
77	0.051140759	0.0004	0.008049693	0.00279606	0.001149483	0.001748483	0.000000000	0.000000000	5.11%	0.04%	0.80%	0.23%	0.35%	0.064885778	6.76%
76	0.052056552	0.0004	0.00865386	0.003263341	0.001654582	0.001948947	0.000000000	0.000000000	5.31%	0.04%	0.86%	0.23%	0.39%	0.067899518	7.11%
75	0.053003059	0.0004	0.00953517	0.00398311	0.001974	0.002169996	0.000000000	0.000000000	5.50%	0.04%	0.95%	0.23%	0.44%	0.07143025	7.51%
74	0.056884555	0.0005	0.011369789	0.003368692	0.002353809	0.002359841	0.000000000	0.000000000	5.70%	0.05%	1.14%	0.24%	0.47%	0.075920776	8.00%

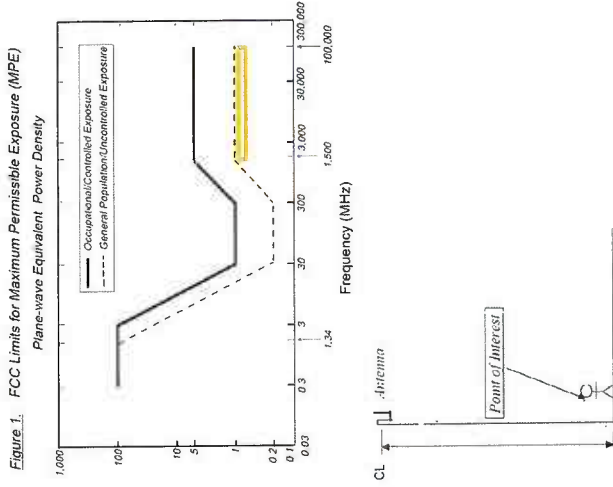


Figure 1. FCC Limits for Maximum Permissible Exposure (MPE)




# **ATTACHMENT 4**

# Town of Guilford, Connecticut - Assessment Parcel Map

Unique ID: 8623

Address: 111 LOVERS LN

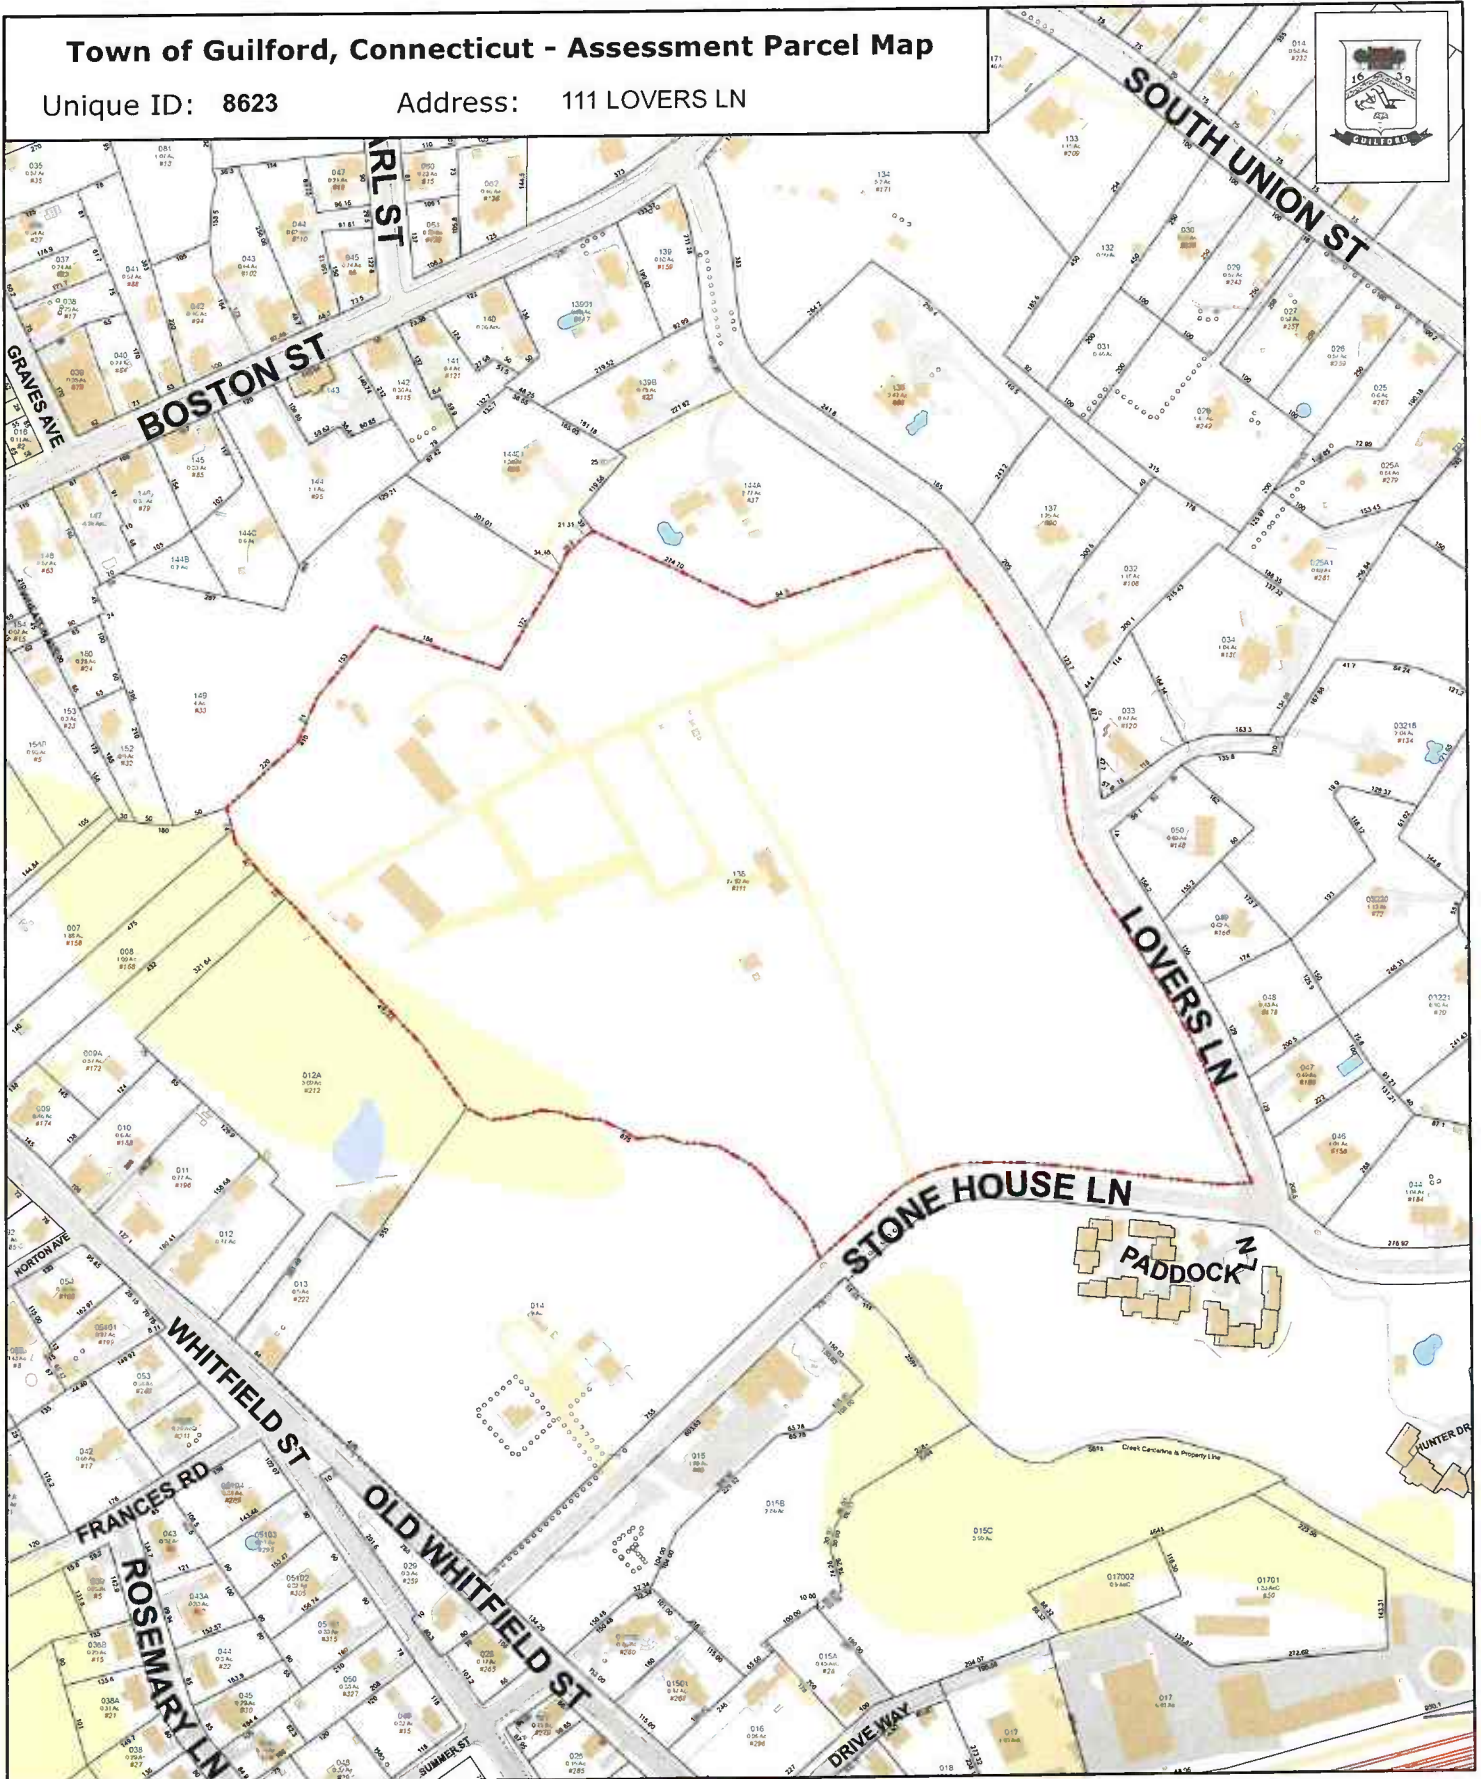

Approximate Scale: 1:3,600



Map Produced:  
January 2026

**Disclaimer:**  
This map is for informational purposes only.  
All information is subject to verification by any user.  
The Town of Guilford and its mapping contractors  
assume no legal responsibility  
for the information contained herein.



# Town of Guilford, CT

## Property Listing Report

Map Block Lot **040138**

Building #

Unique Identifier

**8623**

### Property Information

Property Location	111 LOVERS LN
Mailing Address	P O BOX 290 GUILFORD CT 06437
Land Use	Residential
Zoning Code	
Neighborhood	M025

Owner	GUILFORD AGRICULTURAL SOCIETY
Co-Owner	NA
Book / Page	0175/0697
Land Class	Residential
Census Tract	1901
Acreage	27.92


### Valuation Summary

(Assessed value = 70% of Appraised Value)

Item	Appraised	Assessed
Buildings	0	0
Outbuildings	623600	436520
Land	641900	449330
Total	1265500	885850

### Utility Information

Electric	
Gas	
Sewer	
Public Water	
Well	

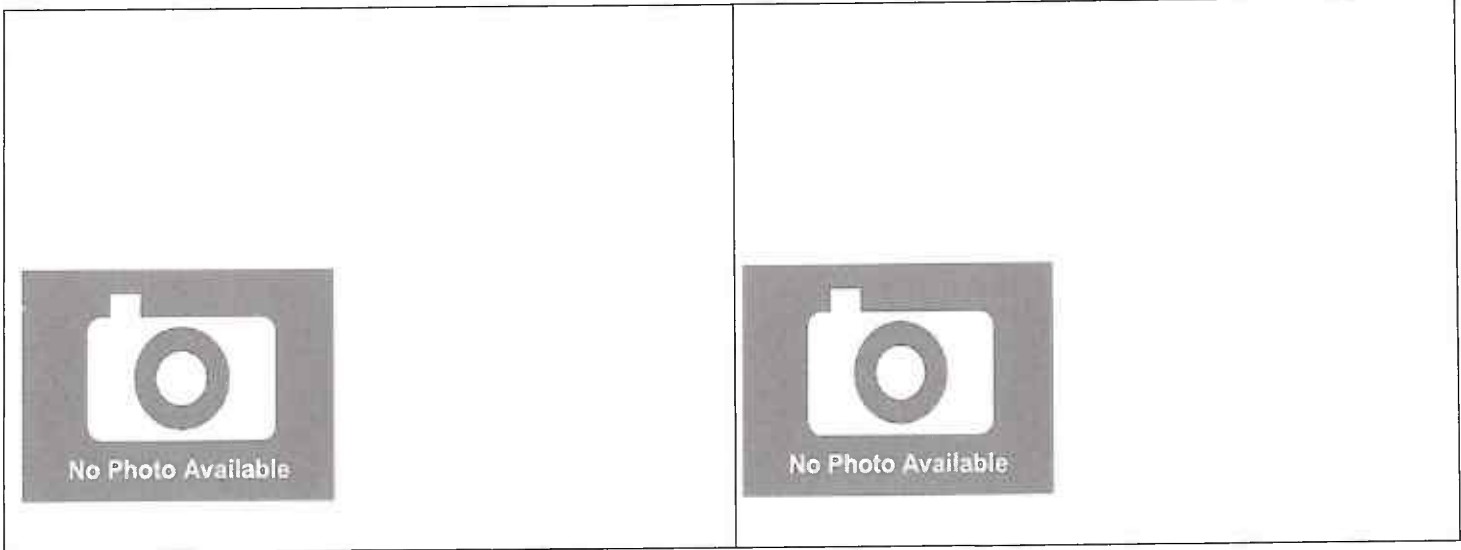

### Primary Construction Details

Year Built	
Building Desc.	
Building Style	
Stories	
Exterior Walls	
Exterior Walls 2	
Interior Walls	
Interior Walls 2	
Interior Floors 1	
Interior Floors 2	

Heating Fuel	
Heating Type	
AC Type	
Bedrooms	
Full Bathrooms	
Half Bathrooms	
Extra Fixtures	
Total Rooms	
Bath Style	
Kitchen Style	
Occupancy	

Building Use	
Building Condition	
Frame Type	
Fireplaces	
Bsmt Gar	
Fin Bsmt Area	
Living Area	
Building Grade	
Roof Style	
Roof Cover	

# **ATTACHMENT 5**



Certificate of Mailing — Firm

Name and Address of Sender	TOTAL NO. of Pieces Listed by Sender	TOTAL NO. of Pieces Received at Post Office™	Affix Stamp Here Postmark with Date of Receipt.																																													
Jonathan H. Schaefer, Esq. Robinson & Cole LLP One State Street Hartford, CT 06103	3	3		\$003.74		<table border="1"> <thead> <tr> <th data-bbox="625 1470 690 2011">USPS® Tracking Number Firm-specific Identifier</th> <th data-bbox="625 1186 690 1470">Address (Name, Street, City, State, and ZIP Code™)</th> <th data-bbox="625 892 690 1186">Postage</th> <th data-bbox="625 693 690 892">Fee</th> <th data-bbox="625 493 690 693">Special Handling</th> <th data-bbox="625 115 690 493">Parcel Airlift</th> </tr> </thead> <tbody> <tr> <td data-bbox="706 1470 755 2011">1.</td> <td data-bbox="690 997 820 1470">Matthew T. Hoey, III, First Selectman Town of Guilford 31 Park Street Guilford, CT 06437</td> <td data-bbox="690 892 820 1186"></td> <td data-bbox="690 693 820 892"></td> <td data-bbox="690 493 820 693"></td> <td data-bbox="690 115 820 493"></td> </tr> <tr> <td data-bbox="836 1470 885 2011">2.</td> <td data-bbox="820 997 950 1470">Anne Hartjen, Town Planner Town of Guilford 31 Park Street Guilford, CT 06437</td> <td data-bbox="820 892 950 1186"></td> <td data-bbox="820 693 950 892"></td> <td data-bbox="820 493 950 693"></td> <td data-bbox="820 115 950 493"></td> </tr> <tr> <td data-bbox="966 1470 1015 2011">3.</td> <td data-bbox="950 997 1079 1470">Guilford Agricultural Society P.O. Box 290 Guilford, CT 06437</td> <td data-bbox="950 892 1079 1186"></td> <td data-bbox="950 693 1079 892"></td> <td data-bbox="950 493 1079 693"></td> <td data-bbox="950 115 1079 493"></td> </tr> <tr> <td data-bbox="1096 1470 1144 2011">4.</td> <td data-bbox="1079 892 1209 1186"></td> <td data-bbox="1079 892 1209 1186"></td> <td data-bbox="1079 693 1209 892"></td> <td data-bbox="1079 493 1209 693"></td> <td data-bbox="1079 115 1209 493"></td> </tr> <tr> <td data-bbox="1226 1470 1274 2011">5.</td> <td data-bbox="1209 892 1339 1186"></td> <td data-bbox="1209 892 1339 1186"></td> <td data-bbox="1209 693 1339 892"></td> <td data-bbox="1209 493 1339 693"></td> <td data-bbox="1209 115 1339 493"></td> </tr> <tr> <td data-bbox="1356 1470 1404 2011">6.</td> <td data-bbox="1339 892 1469 1186"></td> <td data-bbox="1339 892 1469 1186"></td> <td data-bbox="1339 693 1469 892"></td> <td data-bbox="1339 493 1469 693"></td> <td data-bbox="1339 115 1469 493"></td> </tr> </tbody> </table>	USPS® Tracking Number Firm-specific Identifier	Address (Name, Street, City, State, and ZIP Code™)	Postage	Fee	Special Handling	Parcel Airlift	1.	Matthew T. Hoey, III, First Selectman Town of Guilford 31 Park Street Guilford, CT 06437					2.	Anne Hartjen, Town Planner Town of Guilford 31 Park Street Guilford, CT 06437					3.	Guilford Agricultural Society P.O. Box 290 Guilford, CT 06437					4.						5.						6.					
USPS® Tracking Number Firm-specific Identifier	Address (Name, Street, City, State, and ZIP Code™)	Postage	Fee	Special Handling	Parcel Airlift																																											
1.	Matthew T. Hoey, III, First Selectman Town of Guilford 31 Park Street Guilford, CT 06437																																															
2.	Anne Hartjen, Town Planner Town of Guilford 31 Park Street Guilford, CT 06437																																															
3.	Guilford Agricultural Society P.O. Box 290 Guilford, CT 06437																																															
4.																																																
5.																																																
6.																																																