

280 Trumbull Street  
Hartford, CT 06103-3597  
Main (860) 275-8200  
Fax (860) 275-8299  
kbaldwin@rc.com  
Direct (860) 275-8345

Also admitted in Massachusetts

October 22, 2012  
**RECEIVED**  
OCT 23 2012  
**CONNECTICUT  
SITING COUNCIL**

David Martin  
Siting Analyst  
Connecticut Siting Council  
10 Franklin Square  
New Britain, CT 06051

Re: **EM-VER-012-120321 – Cellco Partnership d/b/a Verizon Wireless  
12 Carpenter Road, Bolton, Connecticut**

Dear Mr. Martin:

On April 4, 2012, the Siting Council acknowledged receipt of Cellco's notice of intent to modify its telecommunications facility at 12 Carpenter Road in Bolton. The modification involved the replacement of certain antennas.

As a condition of the acknowledgement, Cellco was required to provide the Council with a letter stating that the recommendations specified in the structural report were implemented. Attached is a Tower Modification Certification Letter verifying that these conditions have been satisfied. All construction associated with these modifications has now been completed.

If you have any questions please do not hesitate to contact me or Rachel Mayo.

Sincerely,



Kenneth C. Baldwin



*Law Offices*

BOSTON

PROVIDENCE

HARTFORD

NEW LONDON

STAMFORD

WHITE PLAINS

NEW YORK CITY

ALBANY

SARASOTA

*www.rc.com*

Attachment  
Copy to:

Sandy M. Carter  
Brian Ragozzine  
Mark Gauger

Centered on Solutions<sup>SM</sup>

October 19, 2012

**Mr. Mark Gauger**  
Verizon Wireless  
99 East River Drive  
East Hartford, Connecticut 06108

**Re: Existing Telecommunications Facility Tower Modification Certification Letter**

**Project:** Verizon ~ Manchester 2  
12 Carpenter Road  
Bolton, CT

**Tower Owner:** SBA Communications Corporation  
5900 Broken Sound Parkway NW  
Boca Raton, Florida 33487

**Engineer:** FDH Engineering  
2730 Rowland Ave Raleigh, NC 27615

**Centek Project No.:** 12005.CO10

Dear Mr. Gauger,


We are providing this "Existing Telecommunications Facility Tower Modification Certification Letter" with regard to the antenna upgrade by Verizon Wireless at the above referenced project.

The following are the basis for substantiating compliance with the design documents prepared by FDH Engineering:

- Review of the FDH structural analysis dated 3/13/2012.
- Field observations by Centek personnel of coax installation on 10/18/2012 which determined all coax lines were installed in general compliance with the recommendations of the structural analysis report prepared by FDH on 3/13/2012.


The work under this Contract has been reviewed and found, to the Engineer's best knowledge, information and belief, to be completed in general compliance with the documents referenced above.

Sincerely,

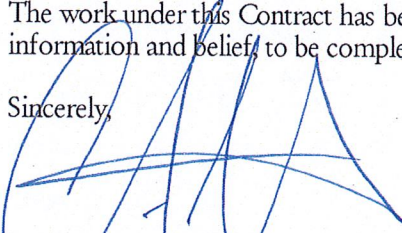  
Carlo F. Centore, PE  
Principal ~ Structural Engineer



CC: Rachel Mayo, Tim Parks, Steve Schadler, Brian Ragozzine



# STATE OF CONNECTICUT

## CONNECTICUT SITING COUNCIL

Ten Franklin Square, New Britain, CT 06051

Phone: (860) 827-2935 Fax: (860) 827-2950

E-Mail: [siting.council@ct.gov](mailto:siting.council@ct.gov)

[www.ct.gov/csc](http://www.ct.gov/csc)

April 4, 2012

Kenneth C. Baldwin, Esq.  
Robinson & Cole LLP  
280 Trumbull Street  
Hartford, CT 06103

RE: **EM-VER-012-120321** - Cellco Partnership d/b/a Verizon Wireless notice of intent to modify an existing telecommunications facility located at 12 Carpenter Road, Bolton, Connecticut.

Dear Attorney Baldwin:

The Connecticut Siting Council (Council) hereby acknowledges your notice to modify this existing telecommunications facility, pursuant to Section 16-50j-73 of the Regulations of Connecticut State Agencies with the following conditions:


- The coax lines be utilized in accordance with the recommendations made in the Structural Analysis Report prepared by FDH Engineering dated March 13, 2012 and stamped by Christopher Murphy; and
- Following the installation of the proposed equipment, Verizon shall provide documentation certifying that the installation complied with the engineer's recommendation.
- Any deviation from the proposed modification as specified in this notice and supporting materials with Council shall render this acknowledgement invalid;
- Any material changes to this modification as proposed shall require the filing of a new notice with the Council;
- Not less than 45 days after completion of construction, the Council shall be notified in writing that construction has been completed;
- The validity of this action shall expire one year from the date of this letter; and
- The applicant may file a request for an extension of time beyond the one year deadline provided that such request is submitted to the Council not less than 60 days prior to the expiration;

The proposed modifications including the placement of all necessary equipment and shelters within the tower compound are to be implemented as specified here and in your notice dated March 20, 2012. The modifications are in compliance with the exception criteria in Section 16-50j-72 (b) of the Regulations of Connecticut State Agencies as changes to an existing facility site that would not increase tower height, extend the boundaries of the tower site, increase noise levels at the tower site boundary by six decibels, and increase the total radio frequencies electromagnetic radiation power density measured at the tower site boundary to or above the standard adopted by the State Department of Environmental Protection pursuant to General Statutes § 22a-162. This facility has also been carefully modeled to ensure that radio frequency emissions are conservatively below State and federal standards applicable to the frequencies now used on this tower.



This decision is under the exclusive jurisdiction of the Council. Please be advised that the validity of this action shall expire one year from the date of this letter. Any additional change to this facility will require explicit notice to this agency pursuant to Regulations of Connecticut State Agencies Section 16-50j-73. Such notice shall include all relevant information regarding the proposed change with cumulative worst-case modeling of radio frequency exposure at the closest point of uncontrolled access to the tower base, consistent with Federal Communications Commission, Office of Engineering and Technology, Bulletin 65. Thank you for your attention and cooperation.

Very truly yours,




Linda Roberts

Executive Director

LR/CDM/laf

c: The Honorable Robert R. Morra, First Selectman, Town of Bolton  
James Rupert, Zoning Enforcement Officer, Town of Bolton  
Hollis Redding, SBA



# STATE OF CONNECTICUT

## CONNECTICUT SITING COUNCIL

Ten Franklin Square, New Britain, CT 06051

Phone: (860) 827-2935 Fax: (860) 827-2950

E-Mail: [siting.council@ct.gov](mailto:siting.council@ct.gov)

[www.ct.gov/csc](http://www.ct.gov/csc)

March 22, 2012

The Honorable Robert R. Morra  
First Selectman  
Town of Bolton  
222 Bolton Center Road  
Bolton, CT 06043

RE: **EM-VER-012-120321** - Celco Partnership d/b/a Verizon Wireless notice of intent to modify an existing telecommunications facility located at 12 Carpenter Road, Bolton, Connecticut.

Dear First Selectman Morra:

The Connecticut Siting Council (Council) received this request to modify an existing telecommunications facility, pursuant to Regulations of Connecticut State Agencies Section 16-50j-72.

If you have any questions or comments regarding this proposal, please call me or inform the Council by April 5, 2012.

Thank you for your cooperation and consideration.

Very truly yours,

Linda Roberts  
Executive Director


LR/jbw

Enclosure: Notice of Intent

c: James Rupert, Zoning Enforcement Officer, Town of Bolton

280 Trumbull Street  
 Hartford, CT 06103-3597  
 Main (860) 275-8200  
 Fax (860) 275-8299  
 kbaldwin@rc.com  
 Direct (860) 275-8345

March 20, 2012

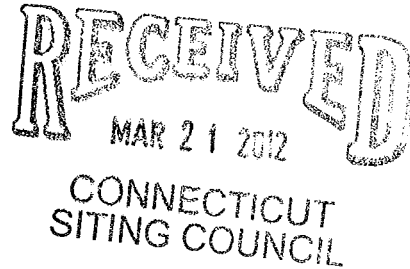

Linda Roberts  
 Executive Director  
 Connecticut Siting Council  
 10 Franklin Square  
 New Britain, CT 06051

Re: **Notice of Exempt Modification – Antenna Swap  
 12 Carpenter Road, Bolton, Connecticut**

Dear Ms. Roberts:

Cellco Partnership d/b/a Verizon Wireless (“Cellco”) currently maintains twelve (12) wireless telecommunications antennas at the 137-foot level on an existing 140-foot tower at the above-referenced address. The tower is owned by SBA. Cellco’s use of the tower was approved by the Council in 2007 (Docket No. 323). Cellco now intends to replace eight (8) of its existing antennas with two (2) model LPA-80063-4CF cellular antennas; one (1) model BXA-171063-12BF PCS antenna; two (2) model BXA-171085-8BF PCS antennas; and three (3) model BXA-70063-6CF LTE antennas, all at the 137-foot level. Cellco also intends to install six (6) coax cable diplexers to its existing antenna platform. Attached behind Tab 1 are the specifications for the replacement antennas and cable diplexers.

Please accept this letter as notification pursuant to R.C.S.A. § 16-50j-73, for construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-72(b)(2). In accordance with R.C.S.A. § 16-50j-73, a copy of this letter is being sent to Robert R. Morra, First Selectman of the Town of Bolton. A copy of this letter is also being sent to Terry Veo, Trustee, the owner of the property on which the tower is located.

The planned modifications to the facility fall squarely within those activities explicitly provided for in R.C.S.A. § 16-50j-72(b)(2).

1. The proposed modifications will not result in an increase in the height of the existing tower. Cellco’s replacement antennas and cable diplexers will be located at the 137-foot level on the existing 140-foot tower.



Law Offices

BOSTON

PROVIDENCE

HARTFORD

NEW LONDON

STAMFORD

WHITE PLAINS

NEW YORK CITY

ALBANY

SARASOTA

www.rc.com

11568349-v1

Linda Roberts  
March 20, 2012  
Page 2

2. The proposed modifications will not involve any change to ground-mounted equipment and, therefore, will not require the extension of the site boundaries.


3. The proposed modifications will not increase noise levels at the facility by six decibels or more.

4. The operation of the replacement antennas will not increase radio frequency (RF) power density levels at the facility to a level at or above the Federal Communications Commission (FCC) adopted safety standard. A cumulative power density table for Cellco's modified facility is included behind Tab 2.

Also attached is a Structural Analysis confirming that the tower and foundation can support Cellco's proposed modifications. (See Tab 3).

For the foregoing reasons, Cellco respectfully submits that the proposed modifications to the above-referenced telecommunications facility constitutes an exempt modification under R.C.S.A. § 16-50j-72(b)(2).

Sincerely,

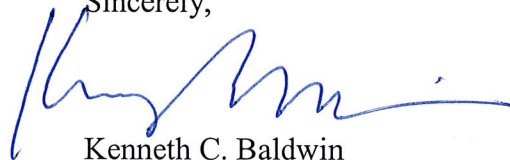

Kenneth C. Baldwin

Enclosures

Copy to:

Robert R. Morra, Bolton First Selectman  
Terry Veo, Trustee  
Sandy M. Carter




# LPA-80063-4CF-EDIN-X


V-Pol | Log Periodic | 63° | 13.0 dBd

Replace "X" with desired electrical downtilt.

Antenna is also available with NE connector(s). Replace "EDIN" with "NE" in the model number when ordering.

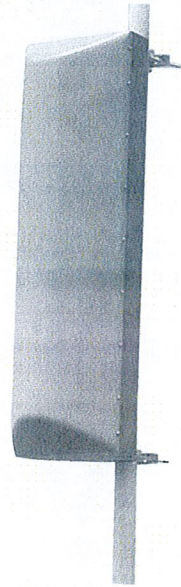

Electrical Characteristics		
Frequency bands	806-960 MHz	
Polarization	Vertical	
Horizontal beamwidth	63°	
Vertical beamwidth	15°	
Gain	13.0 dBd (15.1 dBi)	
Electrical downtilt (X)	0, 2, 4, 5, 6, 8, 10, 12, 14	
Impedance	50Ω	
VSWR	≤1.4:1	
Upper sidelobe suppression (0°)	-15.7 dB	
Front-to-back ratio (+/-30°)	-31.7 dB	
Null fill	5% (-26.02 dB)	
Input power	500 W	
Lightning protection	Direct Ground	
Connector(s)	1 Port / EDIN or NE / Female / Center (Back)	
Mechanical Characteristics		
Dimensions Length x Width x Depth	1205 x 385 x 332 mm      47.4 x 15.2 x 13.1 in	
Depth of antenna with z-bracket	372 mm      14.6 in	
Weight without mounting brackets	9.1 kg      20 lbs	
Survival wind speed	> 201 km/hr      > 125 mph	
Wind area	Front: 0.46 m <sup>2</sup> Side: 0.39 m <sup>2</sup> Front: 5.0 ft <sup>2</sup> Side: 4.2 ft <sup>2</sup>	
Wind load @ 161 km/hr (100 mph)	Front: 660 N    Side: 550 N      Front: 149 lbf    Side: 124 lbf	
Mounting Options		
Part Number	Fits Pipe Diameter	Weight
2-Point Mounting & Downtilt Bracket Kit (0-20°)	21699999      50-102 mm    2.0-4.0 in	5.4 kg    12 lbs
Lock-Down Brace	If the lock-down brace is used, the maximum diameter of the mounting pipe is 88.9 mm or 3.5 in.	

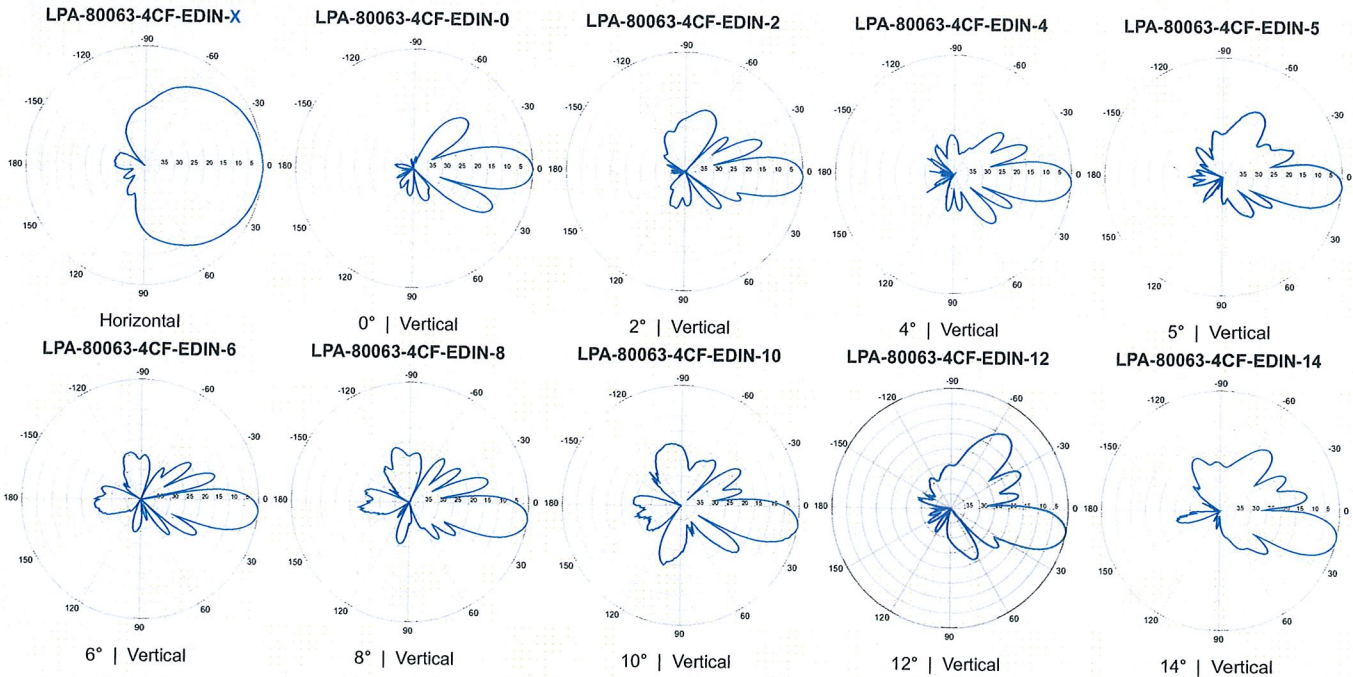

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.



## BXA-171063-12BF-EDIN-X


Replace "X" with desired electrical downtilt.

X-Pol | FET Panel | 63° | 19.0 dBi


Electrical Characteristics	1710-2170 MHz		
	1710-1880 MHz	1850-1990 MHz	1920-2170 MHz
Frequency bands	1710-1880 MHz	1850-1990 MHz	1920-2170 MHz
Polarization	±45°	±45°	±45°
Horizontal beamwidth	68°	65°	60°
Vertical beamwidth	4.5°	4.5°	4.5°
Gain	16.1 dBd / 18.2 dBi	16.5 dBd / 18.6 dBi	16.9 dBd / 19.0 dBi
Electrical downtilt (X)	0, 2, 5		
Impedance	50Ω		
VSWR	≤1.5:1		
First upper sidelobe	< -17 dB		
Front-to-back ratio	> 30 dB		
In-band isolation	> 28 dB		
IM3 (20W carrier)	< -150 dBc		
Input power	300 W		
Lightning protection	Direct Ground		
Connector(s)	2 Ports / EDIN / Female / Bottom		
Operating temperature	-40° to +60° C / -40° to +140° F		
Mechanical Characteristics			
Dimensions Length x Width x Depth	1820 x 154 x 105 mm	71.7 x 6.1 x 4.1 in	
Depth with z-brackets	133 mm	5.2 in	
Weight without mounting brackets	6.8 kg	15 lbs	
Survival wind speed	> 201 km/hr		> 125 mph
Wind area	Front: 0.28 m <sup>2</sup> Side: 0.19 m <sup>2</sup>	Front: 3.1 ft <sup>2</sup> Side: 2.1 ft <sup>2</sup>	
Wind load @ 161 km/hr (100 mph)	Front: 460 N Side: 304 N	Front: 103 lbf Side: 68 lbf	
Mounting Options	Part Number	Fits Pipe Diameter	Weight
2-Point Mounting Bracket Kit	26799997	50-102 mm 2.0-4.0 in	2.3 kg 5 lbs
2-Point Mounting & Downtilt Bracket Kit	26799999	50-102 mm 2.0-4.0 in	3.6 kg 8 lbs
Concealment Configurations	For concealment configurations, order BXA-171063-12BF-EDIN-X-FP		



BXA-171063-12BF-EDIN-X

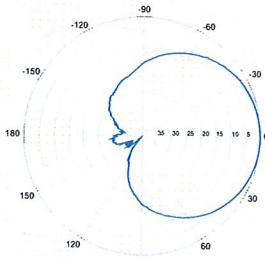


Horizontal | 1710-1880 MHz  
BXA-171063-12BF-EDIN-0

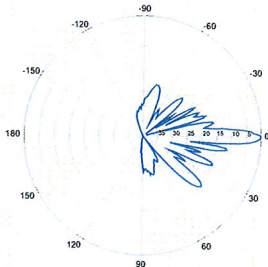


0° | Vertical | 1710-1880 MHz

BXA-171063-12BF-EDIN-X

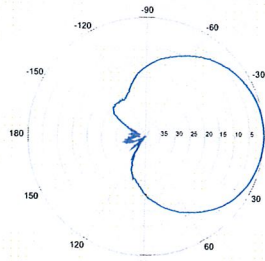


Horizontal | 1850-1990 MHz  
BXA-171063-12BF-EDIN-0

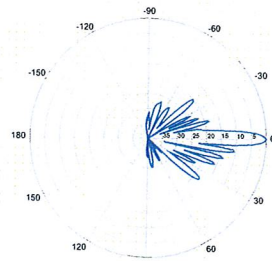


0° | Vertical | 1850-1990 MHz

BXA-171063-12BF-EDIN-X

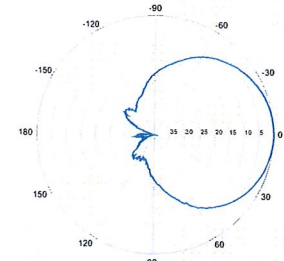

Horizontal | 1920-2170 MHz  
BXA-171063-12BF-EDIN-0

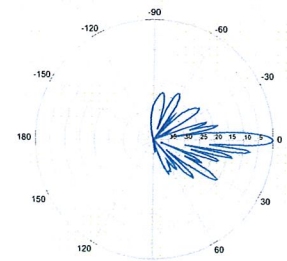


0° | Vertical | 1920-2170 MHz

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.


**BXA-171063-12BF-EDIN-X**

X-Pol | FET Panel | 63° | 19.0 dBi

**BXA-171063-12BF-EDIN-2**

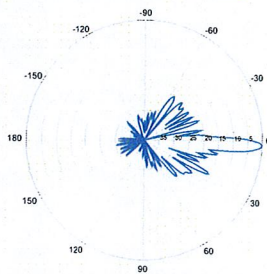


2° | Vertical | 1710-1880 MHz  
**BXA-171063-12BF-EDIN-5**

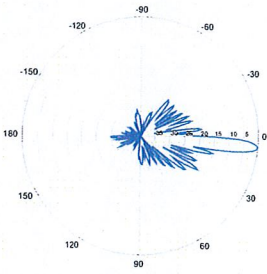


5° | Vertical | 1710-1880 MHz

**BXA-171063-12BF-EDIN-2**

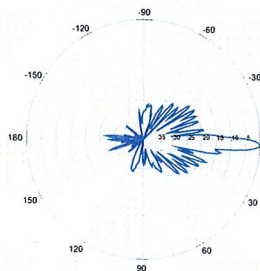


2° | Vertical | 1850-1990 MHz  
**BXA-171063-12BF-EDIN-5**

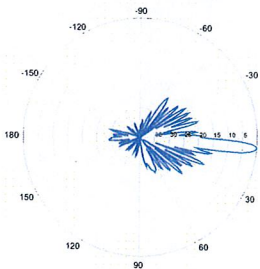


5° | Vertical | 1850-1990 MHz

**BXA-171063-12BF-EDIN-2**

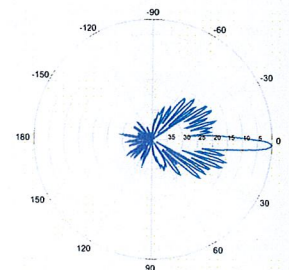

2° | Vertical | 1920-2170 MHz  
**BXA-171063-12BF-EDIN-5**

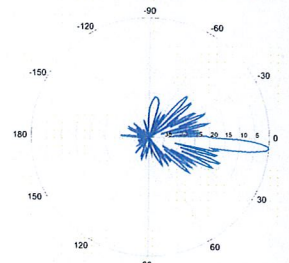

5° | Vertical | 1920-2170 MHz


Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

## BXA-171085-8BF-EDIN-X


Replace "X" with desired electrical downtilt.

X-Pol | FET Panel | 85° | 16.4 dBi


Electrical Characteristics	1710-2170 MHz		
Frequency bands	1710-1880 MHz	1850-1990 MHz	1920-2170 MHz
Polarization	±45°	±45°	±45°
Horizontal beamwidth	88°	85°	80°
Vertical beamwidth	7°	7°	7°
Gain	13.5 dBd / 15.6 dBi	13.9 dBd / 16.0 dBi	14.3 dBd / 16.4 dBi
Electrical downtilt (X)	0, 2, 4		
Impedance	50Ω		
VSWR	≤1.5:1		
First upper sidelobe	< -17 dB		
Front-to-back isolation	> 30 dB		
In-band isolation	> 28 dB		
IM3 (20W carrier)	< -150 dBc		
Input power	300 W		
Lightning protection	Direct Ground		
Connector(s)	2 Ports / EDIN / Female / Bottom		
Operating temperature	-40° to +60° C / -40° to +140° F		
Mechanical Characteristics			
Dimensions Length x Width x Depth	1232 x 154 x 105 mm	48.5 x 6.1 x 4.1 in	
Depth with l-brackets	133 mm	5.2 in	
Weight without mounting brackets	4.8 kg	10.5 lbs	
Survival wind speed	296 km/hr	184 mph	
Wind area	Front: 0.19 m <sup>2</sup> Side: 0.14 m <sup>2</sup>	Front: 2.0 ft <sup>2</sup>	Side: 1.5 ft <sup>2</sup>
Wind load @ 161 km/hr (100 mph)	Front: 281 N Side: 223 N	Front: 63 lbf	Side: 50 lbf
Mounting Options	Part Number	Fits Pipe Diameter	Weight
2-Point Mounting Bracket Kit	26799997	50-102 mm 2.0-4.0 in	2.3 kg 5 lbs
2-Point Mounting & Downtilt Bracket Kit	26799999	50-102 mm 2.0-4.0 in	3.6 kg 8 lbs
Concealment Configurations	For concealment configurations, order BXA-171085-8BF-EDIN-X-FP		

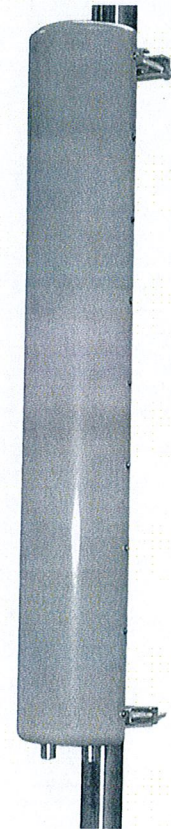

**BXA-171085-8BF-EDIN-X**

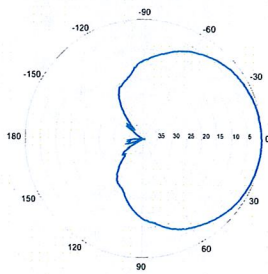


Horizontal | 1710-1880 MHz  
**BXA-171085-8BF-EDIN-0**

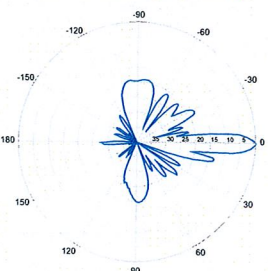


0° | Vertical | 1710-1880 MHz

**BXA-171085-8BF-EDIN-X**

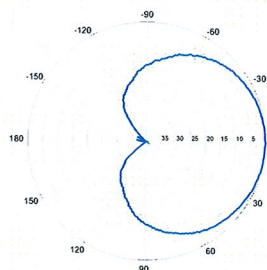


Horizontal | 1850-1990 MHz  
**BXA-171085-8BF-EDIN-0**

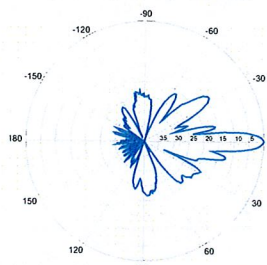


0° | Vertical | 1850-1990 MHz

**BXA-171085-8BF-EDIN-X**

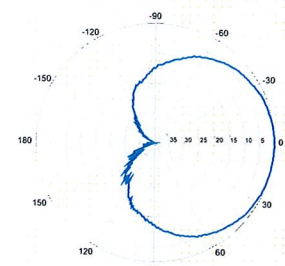

Horizontal | 1920-2170 MHz  
**BXA-171085-8BF-EDIN-0**

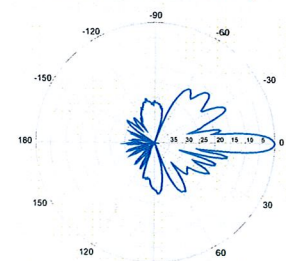


0° | Vertical | 1920-2170 MHz

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

**BXA-171085-8BF-EDIN-X**


X-Pol | FET Panel | 85° | 16.4 dBi

**BXA-171085-8BF-EDIN-2**

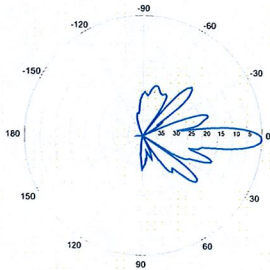


2° | Vertical | 1710-1880 MHz

**BXA-171085-8BF-EDIN-4**

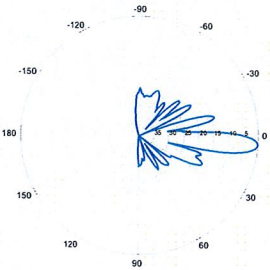


4° | Vertical | 1710-1880 MHz

**BXA-171085-8BF-EDIN-2**

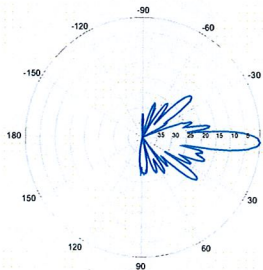


2° | Vertical | 1850-1990 MHz

**BXA-171085-8BF-EDIN-4**

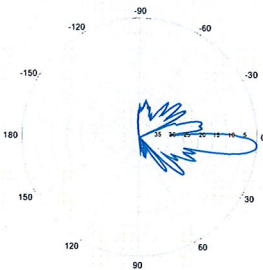


4° | Vertical | 1850-1990 MHz

**BXA-171085-8BF-EDIN-2**

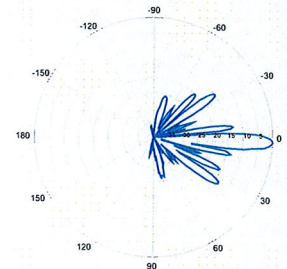

2° | Vertical | 1920-2170 MHz

**BXA-171085-8BF-EDIN-4**

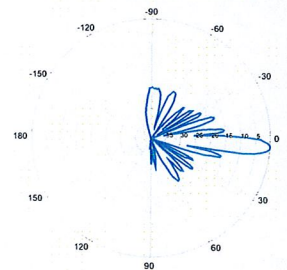

4° | Vertical | 1920-2170 MHz

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

# BXA-70063-6CF-EDIN-X

X-Pol | FET Panel | 63° | 14.5 dBd


Replace "X" with desired electrical downtilt.

Antenna is also available with NE connector(s). Replace "EDIN" with "NE" in the model number when ordering.




Electrical Characteristics	696-900 MHz		
Frequency bands	696-806 MHz	806-900 MHz	
Polarization	±45°		
Horizontal beamwidth	65°	63°	
Vertical beamwidth	13°	11°	
Gain	14.0 dBd (16.1 dBi)	14.5 dBd (16.6 dBi)	
Electrical downtilt (X)	0, 2, 3, 4, 5, 6, 8, 10		
Impedance	50Ω		
VSWR	≤1.35:1		
Upper sidelobe suppression (0°)	-18.3 dB	-18.2 dB	
Front-to-back ratio (+/-30°)	-33.4 dB	-36.3 dB	
Null fill	5% (-26.02 dB)		
Isolation between ports	< -25 dB		
Input power with EDIN connectors	500 W		
Input power with NE connectors	300 W		
Lightning protection	Direct Ground		
Connector(s)	2 Ports / EDIN or NE / Female / Center (Back)		
Mechanical Characteristics			
Dimensions Length x Width x Depth	1804 x 285 x 132 mm	71.0 x 11.2 x 5.2 in	
Depth with z-brackets	172 mm	6.8 in	
Weight without mounting brackets	7.9 kg	17 lbs	
Survival wind speed	> 201 km/hr	> 125 mph	
Wind area	Front: 0.51 m <sup>2</sup> Side: 0.24 m <sup>2</sup>	Front: 5.5 ft <sup>2</sup> Side: 2.6 ft <sup>2</sup>	
Wind load @ 161 km/hr (100 mph)	Front: 759 N Side: 391 N	Front: 169 lbf Side: 89 lbf	
Mounting Options	Part Number	Fits Pipe Diameter	Weight
3-Point Mounting & Downtilt Bracket Kit	36210008	40-115 mm 1.57-4.5 in	6.9 kg 15.2 lbs
Concealment Configurations	For concealment configurations, order BXA-70063-6CF-EDIN-X-FP		

BXA-70063-6CF-EDIN-X

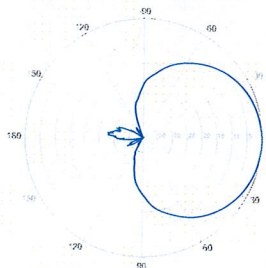


Horizontal | 750 MHz

BXA-70063-6CF-EDIN-0

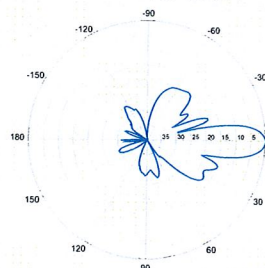


0° | Vertical | 750 MHz


BXA-70063-6CF-EDIN-2

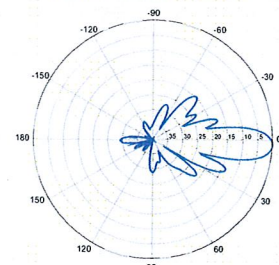


2° | Vertical | 750 MHz

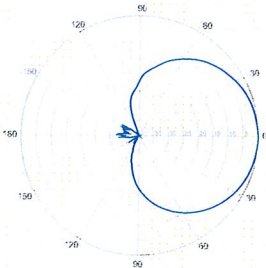

Horizontal | 850 MHz

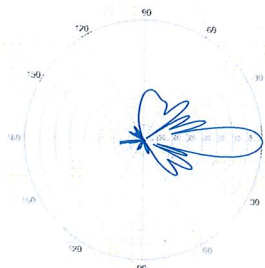

0° | Vertical | 850 MHz

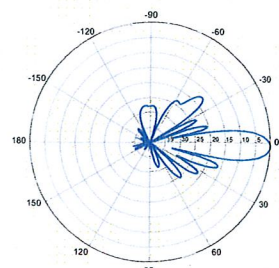


2° | Vertical | 850 MHz

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

**BXA-70063-6CF-EDIN-X**


X-Pol | FET Panel | 63° | 14.5 dBd

**BXA-70063-6CF-EDIN-3**

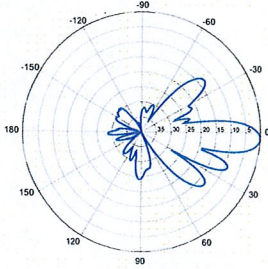


3° | Vertical | 750 MHz

**BXA-70063-6CF-EDIN-4**

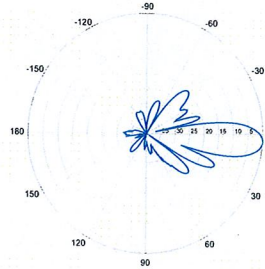


4° | Vertical | 750 MHz


**BXA-70063-6CF-EDIN-5**

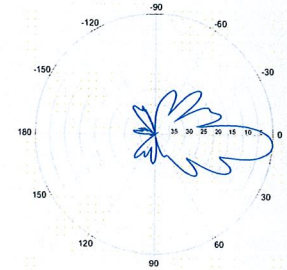


5° | Vertical | 750 MHz

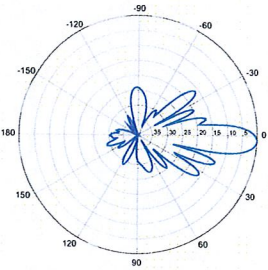

3° | Vertical | 850 MHz

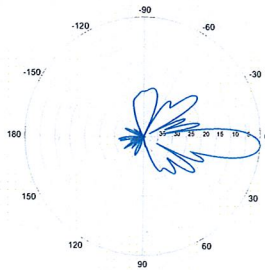


4° | Vertical | 850 MHz

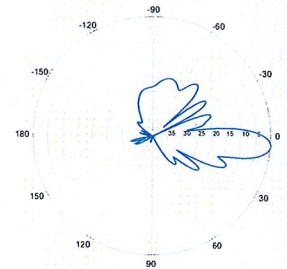


5° | Vertical | 850 MHz

**BXA-70063-6CF-EDIN-6**

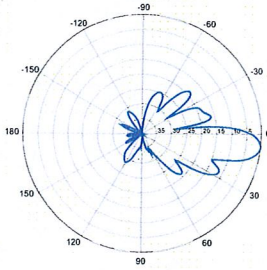


6° | Vertical | 750 MHz

**BXA-70063-6CF-EDIN-8**

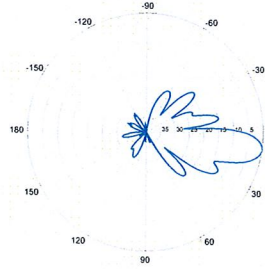


8° | Vertical | 750 MHz


**BXA-70063-6CF-EDIN-10**

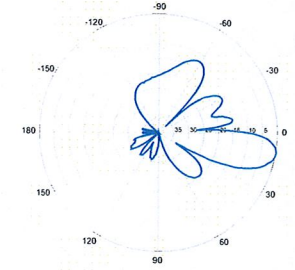


10° | Vertical | 750 MHz

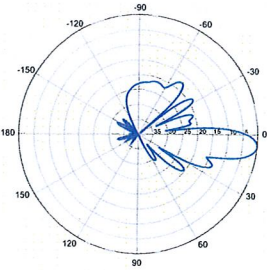

6° | Vertical | 850 MHz

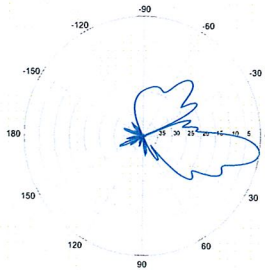

8° | Vertical | 850 MHz

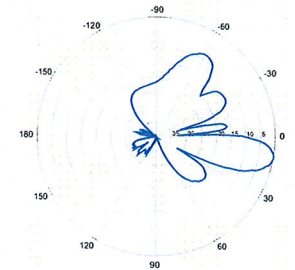

10° | Vertical | 850 MHz


Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.



## ShareLite Wideband Diplexer – In-line 698-960 MHz/1710-2200 MHz, DC pass in high frequency path

## Product Description

The ShareLite FD9R6004 Series of diplexers are designed to enable feeder sharing between systems in the 698-960 MHz range and in the 1710-2200 MHz range. The diplexer is equipped with in-line connector placement so it can be installed in the BTS cabinet or at the tower top. This is especially valuable in crowded sites or when the feeders are not easily accessible. Due to its wideband design, the FD9R6004 Series can accommodate many combining solutions between 698-960 MHz and 1710-2200 MHz systems such as LTE 700 MHz, Cellular 800 MHz with PCS, GSM900 with GSM1800, or GSM900 with UMTS. This diplexer features a highly selective filter. It provides a high level of isolation between ports, while keeping the insertion loss on both paths at an extremely low level. The FD9R6004 diplexers are available with various DC pass options, helpful in configurations with or without the Tower Mount Amplifiers installed.



## Features/Benefits

- LTE ready design
- Extremely Low Insertion Loss
- High level of Rejection between bands – Protection against interferences
- Extremely High Power Handling Capability
- Integrated DC block/bypass versions available
- Very compact & small size design – Easy installation and reduced tower load
- In-line long-neck connectors for easy connection & waterproofing
- Exceptional reliability & environmental protection (IP 67)
- Equipped with 1 \* Breathable Vent – Prevent any humidity inside the product
- Mounting hardware for Wall and Pole mount provided (P/N SEM2-1A)
- Grounding already provided through the mounting bracket
- Kit available for easy dual mount

## Technical Specifications

Product Type	Diplexer/Cross Band Coupler
Frequency Range 1, MHz	698-960
Frequency Range 2, MHz	1710-2200
Application	LTE700, GSM900, UMTS, GSM1800, Cellular 800, PCS
Configuration	Sharelite Single diplexer, outdoor, DC pass in the 1710-2170MHz path, with mounting hardware SEM2-1A
Mounting	Wall Mounting: With 4 screws (maximum 6mm diameter); Pole Mounting: With included clamp set 40-110mm (1.57-4.33)
Return Loss All Ports Min/Typ, dB	19/23
Power Handling Continuous, Max, W	1250 at common port; 750 in low frequency path & 500 in high frequency path
Power Handling Peak, Max, W	15000 in low frequency path & 8000 in high frequency path
Impedance, Ohms	50
Insertion Loss, Path 1, dB	0.07 typ.
Insertion Loss, Path 2, dB	0.13 typ.
Rejection Between Bands Min/Typ, dB	58/64@698-960MHz; 60/70@1710-2200MHz
IMP Level at the COM Port, Typ, dBm	-112 @ 2x43
DC Pass in Low Frequency Path	No
DC Pass in High Frequency Path	Yes
Temperature Range, °C (°F)	-40 to +60 (-40 to +140)
Environmental	ETSI 300-019-2-4 Class 4.1E
Ingress Protection	IP 67
Lightning Protection	EN/IEC61000-4-5 Level 4
Connectors	In-line long-neck 7-16-Female
Weight, kg (lb)	1.2 (2.6)
Shipping Weight, kg (lb)	3.2 (7) for 2 * single units in 1 * box, 9.8 (21.6) for 6 * units = 3 * Boxes in 1 * overwrap
Dimensions, H x W x D, mm (in)	147 x 164 x 37 (5.8 x 6.5 x 1.5)
Shipping Dimensions, H x W x D, mm (in)	254 x 406 x 82 (10 x 16 x 3.2) for 2 * Single Units in 1 * box, 280 x 406 x 241 (11 x 16 x 9.5) for 6 * units = 3 * Boxes in 1 * overwrap
Volume, L	0.43
Housing	Aluminum

## Notes

All information contained in the present datasheet is subject to confirmation at time of ordering




ShareLite Wideband Diplexer – In-line 698-960 MHz/1710-2200 MHz, DC pass in high frequency path

Other Documentation

FD9R6004/2C-3L Installation Instructions: [Wideband\\_Diplexer\\_Installation\\_Rev5.pdf](#)

Selection Guide Diplexer 698-960 / 1710-2200MHz					
	Model Number	Full DC Pass	DC Pass High Band	DC Pass Low Band	Mounting Hardware Included
Single	FD9R6004/1C-3L				X
	FD9R6004/2C-3L				X
	FD9R6004/3C-3L				X
Dual	KIT-FD9R6004/1C-DL				X
	KIT-FD9R6004/2C-DL				X
	KIT-FD9R6004/3C-DL				X

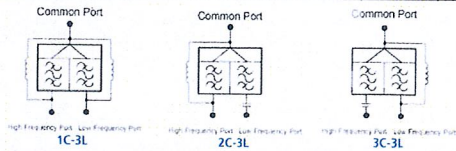

The FD9R6004 Series is upgradeable to a Dual Diplexer kit by means of 2 diplexers and mounting hardware kits SEM2-1A and SEM2-3

Mounting Hardware and Ground Cable Ordering Information	
Model Number	Description
SEM2-1A	Mounting Hardware, Pole mount ø40-110mm (Included with the Single and Dual Diplexer) Wall Screws M6 (Not included with the product)
SEM2-3	Assembly kit for 2 pcs of FD9R6004/xC-3L (Can be ordered separately but included with the Dual Diplexer Kit)
CA020-2	Ground Cable, 2m, includes lugs (Optional)
CA030-2	Ground Cable, 2m, includes lugs (Optional)
SEM6	Mounting Hardware for 6 Diplexers, Tower Base (Optional)

All information contained in the present datasheet is subject to confirmation at time of ordering



		General		Power		Density							
Site Name: Manchester 2 (Bolton)													
Tower Height: Verizon @ 137ft													
CARRIER	# OF CHAN.	WATTS ERP	HEIGHT	CALC. POWER DENS	FREQ.	MAX. PERMISS. EXP.	FRACTION MPE	Total					
*T-Mobile	12	162	127	0.0433	1945	1.0000	4.33%						
*Sprint Nextel	12	100	117	0.0315	851	0.5673	5.56%						
*Pocket	3	631	97	0.0723	2130	1.0000	7.23%						
*Cingular GSM	2	296	107	0.0186	1900	1.0000	1.86%						
*Cingular GSM	4	296	107	0.0372	880	0.5867	6.34%						
*Cingular UMTS	1	500	107	0.0157	880	0.5867	2.68%						
<b>Verizon PCS</b>	<b>7</b>	<b>315</b>	<b>137</b>	<b>0.0422</b>	<b>1970</b>	<b>1.0000</b>	<b>4.22%</b>						
<b>Verizon Cellular</b>	<b>9</b>	<b>301</b>	<b>137</b>	<b>0.0519</b>	<b>869</b>	<b>0.5793</b>	<b>8.96%</b>						
<b>Verizon AWS</b>	<b>1</b>	<b>788</b>	<b>137</b>	<b>0.0151</b>	<b>2145</b>	<b>1.0000</b>	<b>1.51%</b>						
<b>Verizon 700</b>	<b>1</b>	<b>790</b>	<b>137</b>	<b>0.0151</b>	<b>698</b>	<b>0.4653</b>	<b>3.25%</b>						
								<b>45.94%</b>					
* Source: Siting Council													



FDH Engineering, Inc., 2730 Rowland Rd. Raleigh, NC 27615, Ph. 919.755.1012, Fax 919.755.1031

**Structural Analysis for  
SBA Network Services, Inc.**

**139' Monopole Tower**

**SBA Site Name: Bolton 2  
SBA Site ID: CT11558-A  
Verizon Site Name: Manchester 2 CT**

**FDH Project Number 12-02254E S1 (R1)**

**Analysis Results**

Tower Components	52.1%	Sufficient
Foundation	66.0%	Sufficient

Prepared By:

David Chickering, EI  
Project Engineer

Reviewed By:

Christopher M Murphy, PE  
President  
CT PE License No. 25842

FDH Engineering, Inc.  
2730 Rowland Rd.  
Raleigh, NC 27615  
(919) 755-1012  
info@fdh-inc.com



March 13, 2012

*Prepared pursuant to TIA/EIA-222-F Structural Standards for Steel Antenna Towers and Antenna Supporting Structures & 2005 Connecticut State Building Code*

**TABLE OF CONTENTS**

EXECUTIVE SUMMARY .....3  
    Conclusions .....3  
    Recommendation .....3  
APPURTENANCE LISTING .....4  
RESULTS .....5  
GENERAL COMMENTS .....6  
LIMITATIONS .....6  
APPENDIX .....7

## EXECUTIVE SUMMARY

At the request of SBA Network Services, Inc., FDH Engineering, Inc. performed a structural analysis of the monopole located in Bolton, CT to determine whether the tower is structurally adequate to support both the existing and proposed loads pursuant to the *Structural Standards for Steel Antenna Towers and Antenna Supporting Structures, TIA/EIA-222-F* and *2005 Connecticut State Building Code (CSBC)*. Information pertaining to the existing/proposed antenna loading, current tower geometry, geotechnical data, and member sizes was obtained from:

- Fred A. Nudd Corporation (Project No. 207-13312) original design drawings dated September 5, 2007
- FDH, Inc. (Job No. 08-08057T) TIA Inspection Report dated September 16, 2008
- SBA Network Services, Inc.

The *basic design wind speed* per the *TIA/EIA-222-F* standards and *2005 CSBC* is 85 mph without ice and 38 mph with 1" radial ice. Ice is considered to increase in thickness with height.

## Conclusions

With the existing and proposed antennas from Verizon in place at 137 ft, the tower meets the requirements of the *TIA/EIA-222-F* standards and *2005 CSBC* provided the **Recommendation** listed below is satisfied. Furthermore, provided the foundation was designed and constructed to support the original design reactions (see Nudd Project No. 207-13312), the foundation should have the necessary capacity to support the existing and proposed loading. For a more detailed description of the analysis of the tower, see the **Results** section of this report.

Our structural analysis has been performed assuming all information provided to FDH Engineering, Inc. is accurate (i.e., the steel data, tower layout, existing antenna loading, and proposed antenna loading) and that the tower has been properly erected and maintained per the original design drawings.

## Recommendation

To ensure the requirements of the *TIA/EIA-222-F* standards and *2005 CSBC* are met with the existing and proposed loading in place, we have the following recommendation:

1. The existing coax should be used with the proposed loading.

## APPURTENANCE LISTING

The proposed and existing antennas with their corresponding cables/coax lines are shown in **Table 1**. *If the actual layout determined in the field deviates from the layout, FDH Engineering, Inc. should be contacted to perform a revised analysis.*

**Table 1 - Appurtenance Loading**

### Existing Loading:

Antenna Elevation (ft)	Description	Coax and Lines <sup>1</sup>	Carrier	Mount Elevation (ft)	Mount Type
139	(4) Antel LPD-6513 w/Mount Pipe (6) Antel LPA-185063/12CPE W/Mount Pipe (2) Antel LPA-80080/6CF W/Mount Pipe	(12) 1-5/8"	Verizon	137	(1) 12.5' Low Profile Platform
126.5	(3) RFS APX16PV-16PVL-C W/Mount Pipe (3) Comm DTMA1819-00-12 TMAs	(6) 1-5/8" (1) 1/4"	T-Mobile	126.5	(1) 12.5' Low Profile Platform
108.3	(6) Powerwave AXCM-800/1900-90-13 w/ Mount Pipe (6) Powerwave LGP13519 TMAs (6) Powerwave LGP21401 TMAs	(12) 1-5/8"	AT&T	108.3	(1) 13.5' Low Profile Platform
97 <sup>2</sup>	(3) RFS APXV18-206517S-C W/Mount Pipe	(6) 1-5/8"	Metro PCS	97	(3) Pipe Mounts

1. Coax installed inside the pole's shaft unless otherwise noted.

2. Coax is installed outside the pole shaft in a single row.

### Proposed Loading:

Antenna Elevation (ft)	Description	Coax and Lines	Carrier	Mount Elevation (ft)	Mount Type
137	(3) Antel BXA-70063/6CF W/Mount Pipe (4) Antel LPA-80080/6CF W/Mount Pipe (2) Antel BXA-171085/12BF_2 w/ Mount Pipe (1) Antel BXA-171063/12CF_2 w/ Mount Pipe (2) Antel LPA-80063/4CF w/ Mount Pipe (6) RFS FD9R6004/2C-3L Diplexers	(12) 1-5/8"	Verizon	137	(1) 12.5' Low Profile Platform

## RESULTS

The following yield strength of steel for individual members was used for analysis:

**Table 2 - Material Strength**

Member Type	Yield Strength
Tower Shaft Sections	65 ksi
Base Plate	50 ksi
Anchor Bolts	105 ksi

**Table 3** displays the summary of the ratio (as a percentage) of force in the member to their capacities. Values greater than 100% indicate locations where the maximum force in the member exceeds its capacity. **Table 4** displays the maximum foundation reactions.

If the assumptions outlined in this report differ from actual field conditions, FDH Engineering, Inc. should be contacted to perform a revised analysis. Furthermore, as no information pertaining to the allowable twist and sway requirements for the existing or proposed appurtenances was provided, deflection and rotation were not taken into consideration when performing this analysis.

See the **Appendix** for detailed modeling information

**Table 3 - Summary of Working Percentage of Structural Components**

Section No.	Elevation ft	Component Type	Size	% Capacity	Pass Fail
L1	139 - 114	Pole	TP29.875x24x0.25	20.3	Pass
L2	114 - 89	Pole	TP35.8125x29.875x0.25	37.2	Pass
L3	89 - 69	Pole	TP40x34.125x0.3125	44.0	Pass
L4	69 - 44	Pole	TP45.875x40x0.3125	50.6	Pass
L5	44 - 25	Pole	TP49.75x43.84x0.375	48.7	Pass
L6	25 - 0	Pole	TP55.625x49.75x0.375	52.1	Pass
	0	Anchor Bolts	(20) 2"Ø on 62" BC	43.8	Pass
	0	Base Plate	PL 68"Ø x 2.5" thk.	35.1	Pass

**Table 4 - Maximum Base Reactions**

Base Reactions	Current Analysis* (TIA/EIA-222-F)	Original Design (ANSI/TIA-222-G)
Axial	30 k	67 k
Shear	21 k	39 k
Moment	1,992 k-ft	4,076 k-ft

\*Current analysis reactions are within an allowable factor of 1.35 when the original design reactions are based on a load resistance factored design per ANSI/TIA-222-G.

## GENERAL COMMENTS

This engineering analysis is based upon the theoretical capacity of the structure. It is not a condition assessment of the tower and its foundation. It is the responsibility of SBA Network Services, Inc. to verify that the tower modeled and analyzed is the correct structure (with accurate antenna loading information) modeled. If there are substantial modifications to be made or the assumptions made in this analysis are not accurate, FDH Engineering, Inc. should be notified immediately to perform a revised analysis.



## LIMITATIONS

All opinions and conclusions are considered accurate to a reasonable degree of engineering certainty based upon the evidence available at the time of this report. All opinions and conclusions are subject to revision based upon receipt of new or additional/updated information. All services are provided exercising a level of care and diligence equivalent to the standard and care of our profession. No other warranty or guarantee, expressed or implied, is offered. Our services are confidential in nature and we will not release this report to any other party without the client's consent. The use of this engineering work is limited to the express purpose for which it was commissioned and it may not be reused, copied, or distributed for any other purpose without the written consent of FDH Engineering, Inc.

## APPENDIX



Section	1	2	3	4	5	6
Length (ft)	25.00	25.00	25.00	25.00	25.00	25.00
Number of Sides	18	18	18	18	18	18
Thickness (in)	0.2500	0.2500	0.3125	0.3125	0.3750	0.3750
Socket Length (ft)		5.00	6.00	6.00	6.00	6.00
Top Dia (in)	24.0000	29.8750	34.1250	40.0000	43.8400	49.7500
Bot Dia (in)	29.8750	35.8125	40.0000	45.8750	49.7500	55.6250
Grade			A572-65			
Weight (K)	1.8	2.2	3.1	3.6	4.7	5.3

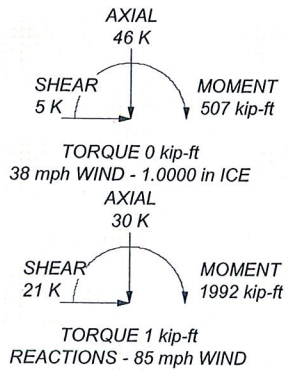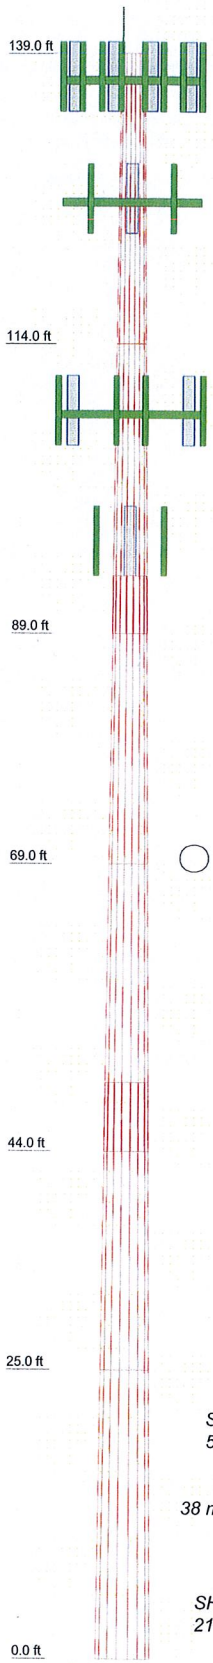

**DESIGNED APPURTENANCE LOADING**


TYPE	ELEVATION	TYPE	ELEVATION
Lightning Rod	139	DTMA1819-00-12 TMA	126.5
BXA-70063/6CF W/Mount Pipe	137	DTMA1819-00-12 TMA	126.5
BXA-70063/6CF W/Mount Pipe	137	(1) 12.5' Low Profile Platform	126.5
BXA-70063/6CF W/Mount Pipe	137	(2) AXCM-800/1900-90-13 w/ Mount Pipe	108.25
(2) LPA-80080/6CF W/Mount Pipe	137	(2) AXCM-800/1900-90-13 w/ Mount Pipe	108.25
LPA-80080/6CF W/Mount Pipe	137	(2) AXCM-800/1900-90-13 w/ Mount Pipe	108.25
LPA-80080/6CF W/Mount Pipe	137	(2) LGP13519 TMA	108.25
BXA-171085/12BF_2 w/ Mount Pipe	137	(2) LGP13519 TMA	108.25
BXA-171085/12BF_2 w/ Mount Pipe	137	(2) LGP13519 TMA	108.25
BXA-171063/12CF_2 w/ Mount Pipe	137	(2) LGP21401 TMA	108.25
LPA-80063/4CF w/ Mount Pipe	137	(2) LGP21401 TMA	108.25
LPA-80063/4CF w/ Mount Pipe	137	(2) LGP21401 TMA	108.25
(2) FD9R6004/2C-3L Diplexer	137	(1) 12.5' Low Profile Platform	108.25
(2) FD9R6004/2C-3L Diplexer	137	APXV18-206517S-C W/Mount Pipe	97
(2) FD9R6004/2C-3L Diplexer	137	APXV18-206517S-C W/Mount Pipe	97
(1) 12.5' Low Profile Platform	137	APXV18-206517S-C W/Mount Pipe	97
APX16PV-16PVL-C W/Mount Pipe	126.5		
APX16PV-16PVL-C W/Mount Pipe	126.5		
APX16PV-16PVL-C W/Mount Pipe	126.5		
DTMA1819-00-12 TMA	126.5		

**MATERIAL STRENGTH**

GRADE	Fy	Fu	GRADE	Fy	Fu
A572-65	65 ksi	80 ksi			

**TOWER DESIGN NOTES**

1. Tower is located in Tolland County, Connecticut.
2. Tower designed for a 85 mph basic wind in accordance with the TIA/EIA-222-F Standard.
3. Tower is also designed for a 38 mph basic wind with 1.00 in ice. Ice is considered to increase in thickness with height.
4. Deflections are based upon a 50 mph wind.
5. TOWER RATING: 52.1%

 <b>FDH Engineering, Inc.</b> 2730 Rowland Road Raleigh, NC 27615 Phone: (919) 755-1012 FAX:	Job: <b>Bolton 2, CT11558-A</b>
	Project: <b>12-02254E S1</b>
	Client: <b>SBA Network Services, Inc.</b> Drawn by: <b>DWC</b> App'd:
	Code: <b>TIA/EIA-222-F</b> Date: <b>02/10/12</b> Scale: <b>NTS</b>
	Path: _____ Dwg No. <b>E-1</b>