

April 16, 2015

Melanie A. Bachman
Acting Executive Director
Connecticut Siting Council
10 Franklin Square
New Britain, CT 06051

Re: **Notice of Exempt Modification – Facility Modification
1725 Stafford Road, Mansfield, Connecticut**

Dear Ms. Bachman:

Cellco Partnership d/b/a Verizon Wireless (“Cellco”) currently maintains twelve (12) wireless telecommunications antennas at the top of an existing 170-foot tower at 1725 Stafford Road in Mansfield (the “Property”). The tower is owned American Tower Corporation. Cellco’s use of the tower was approved by the Council in 2004. Cellco now intends to modify its facility by replacing all of its existing antennas with three (3) model LNX-6514DS-VTM, 700 MHz antennas; three (3) model BXA-70080-4BF, 850 MHz antennas; three (3) model HBXX-6517DS-VTM, 1900 MHz antennas; and three (3) model HBXX-6517DS-VTM, 2100 MHz antennas, all at the same 170-foot level on the tower. Cellco also intends to install six (6) remote radio heads (“RRHs”) behind its 1900 MHz and 2100 MHz antennas and one (1) HYBRIFLEX™ antenna cable inside the monopole tower. Included in Attachment 1 are specifications for Cellco’s replacement antennas, RRHs and HYBRIFLEX™ cable.

Please accept this letter as notification pursuant to R.C.S.A. § 16-50j-73, for construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-72(b)(2). In accordance with R.C.S.A. § 16-50j-73, a copy of this letter is being sent to Matthew W. Hart, Town Manager for the Town of Mansfield. The Town of Mansfield is the owner of the Property.

The planned modifications to the facility fall squarely within those activities explicitly provided for in R.C.S.A. § 16-50j-72(b)(2).

Robinson+Cole

Melanie A. Bachman


April 16, 2015

Page 2

1. The proposed modifications will not result in an increase in the height of the existing tower. Cellco's replacement antennas and RRHs will be installed on its existing antenna platform at the top of the tower.
2. The proposed modifications will not involve any change to ground-mounted equipment and, therefore, will not require the extension of the site boundary.
3. The proposed modifications will not increase noise levels at the facility by six decibels or more, or to levels that exceed state and local criteria.
4. The operation of the replacement antennas will not increase radio frequency (RF) emissions at the facility to a level at or above the Federal Communications Commission (FCC) safety standard. A cumulative General Power Density table for Cellco's modified facility is included behind Attachment 2.
5. The proposed modifications will not cause a change or alteration in the physical or environmental characteristics of the site.
6. The tower and its foundation can support Cellco's proposed modifications. (See Structural Evaluation included in Attachment 3).

For the foregoing reasons, Cellco respectfully submits that the proposed modifications to the above-referenced telecommunications facility constitutes an exempt modification under R.C.S.A. § 16-50j-72(b)(2).

Sincerely,

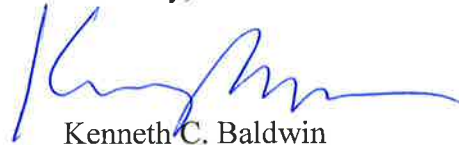A handwritten signature in blue ink, appearing to read 'Kenneth C. Baldwin', is written over a horizontal line.

Kenneth C. Baldwin

Enclosures

Copy to:

Matthew W. Hart, Mansfield Town Manager
Tim Parks

ATTACHMENT 1

Product Specifications

COMMScope®

POWERED BY



LNX-6514DS-VTM

Andrew® Antenna, 698–896 MHz, 65° horizontal beamwidth, RET compatible

- Great solution to maximize network coverage and capacity
- Excellent gain, VSWR, front-to-back ratio, and PIM specifications for robust network performance
- Ideal choice for site collocations and tough zoning restrictions
- Excellent solution for site sharing and maximizing capacity
- Fully compatible with Andrew remote electrical tilt system for greater OpEx savings
- The RF connectors are designed for IP67 rating and the radome for IP56 rating

Electrical Specifications

Frequency Band, MHz	698–806	806–896
Gain, dBi	15.8	15.9
Beamwidth, Horizontal, degrees	65	64
Beamwidth, Vertical, degrees	12.4	11.2
Beam Tilt, degrees	0–10	0–10
USLS, dB	17	18
Front-to-Back Ratio at 180°, dB	32	30
CPR at Boresight, dB	23	23
CPR at Sector, dB	12	10
Isolation, dB	30	30
VSWR Return Loss, dB	1.4 15.6	1.4 15.6
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153
Input Power per Port, maximum, watts	400	400
Polarization	±45°	±45°
Impedance	50 ohm	50 ohm

Electrical Specifications, BASTA*

Frequency Band, MHz	698–806	806–896
Gain by all Beam Tilts, average, dBi	15.6	15.7
Gain by all Beam Tilts Tolerance, dB	±0.4	±0.5
	0 ° 15.7	0 ° 15.9
Gain by Beam Tilt, average, dBi	5 ° 15.7	5 ° 15.8
	10 ° 15.3	10 ° 15.3
Beamwidth, Horizontal Tolerance, degrees	±0.9	±1.4
Beamwidth, Vertical Tolerance, degrees	±0.8	±0.6
USLS, dB	18	20
Front-to-Back Total Power at 180° ± 30°, dB	25	23
CPR at Boresight, dB	25	24
CPR at Sector, dB	15	12

* CommScope® supports NGMN recommendations on Base Station Antenna Standards (BASTA). To learn more about the benefits of BASTA, [download the whitepaper Time to Raise the Bar on BSAs.](#)

General Specifications

Antenna Brand	Andrew®
Antenna Type	DualPol®
Band	Single band
Brand	DualPol® Teletilt®

Product Specifications

COMMScope®

LNx-6514DS-VTM

POWERED BY



Operating Frequency Band

698 – 896 MHz

Mechanical Specifications

Color	Light gray
Lightning Protection	dc Ground
Radiator Material	Aluminum
Radome Material	Fiberglass, UV resistant
RF Connector Interface	7-16 DIN Female
RF Connector Location	Bottom
RF Connector Quantity, total	2
Wind Loading, maximum	617.7 N @ 150 km/h 138.9 lbf @ 150 km/h
Wind Speed, maximum	241.0 km/h 149.8 mph

Dimensions

Depth	181.0 mm 7.1 in
Length	1847.0 mm 72.7 in
Width	301.0 mm 11.9 in
Net Weight	14.2 kg 31.3 lb

Remote Electrical Tilt (RET) Information

Model with Factory Installed AISG 2.0 Actuator LNX-6514DS-A1M

RET System Teletilt®

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant by Exemption
China RoHS SJ/T 11364-2006	Above Maximum Concentration Value (MCV)
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



Included Products

DB380 — Pipe Mounting Kit for 2.4"-4.5" (60-115mm) OD round members on wide panel antennas. Includes 2 clamp sets and double nuts.

DB5083 — Downtilt Mounting Kit for 2.4"-4.5" (60 - 115 mm) OD round members. Includes a heavy-duty, galvanized steel downtilt mounting bracket assembly and associated hardware. This kit is compatible with the DB380 pipe mount kit for panel antennas that are equipped with two mounting brackets.

BXA-70080-4BF-EDIN-X

X-Pol | FET Panel | 80° | 12.0 dBd


Replace "X" with desired electrical downtilt.

Antenna is also available with N connector(s).
Replace "EDIN" with "N" in the model number
when ordering.

Electrical Characteristics	696-900 MHz			
Frequency bands	696-806 MHz		806-900 MHz	
Polarization	±45°			
Horizontal beamwidth	82°		80°	
Vertical beamwidth	17°		15°	
Gain	11.5 dBd (13.6 dBi)		12.0 dBd (14.1 dBi)	
Electrical downtilt (X)	0, 2, 4, 6, 8, 10, 12, 14			
Impedance	50Ω			
VSWR	≤1.35:1			
Upper sidelobe suppression (0°)	-11.8 dB		-13.1 dB	
Front-to-back ratio (+/-30°)	-30.3 dB		-36.7 dB	
Null fill	5% (-26.02 dB)			
Isolation between ports	< -25 dB			
Input power with EDIN connectors	500 W			
Input power with N connectors	300 W			
Lightning protection	Direct Ground			
Connector(s)	2 Ports / EDIN or N / Female / Bottom			
Mechanical Characteristics				
Dimensions Length x Width x Depth	1125 x 204 x 150 mm		44.3 x 8.0 x 5.9 in	
Depth with z-brackets	190 mm		7.5 in	
Weight without mounting brackets	4.5 kg		9.8 lbs	
Survival wind speed	> 201 km/hr		> 125 mph	
Wind area	Front: 0.23 m²	Side: 0.17 m²	Front: 2.5 ft²	Side: 1.8 ft²
Wind load @ 161 km/hr (100 mph)	Front: 330 N	Side: 279 N	Front: 74 lbf	Side: 63 lbf
Mounting Options	Part Number	Fits Pipe Diameter		Weight
2-Point Mounting & Downtilt Bracket Kit	36210006	40-115 mm	1.57-4.5 in	4.1 kg 9 lbs
Concealment Configurations	For concealment configurations, order BXA-70080-4BF-EDIN-X-FP			




BXA-70080-4BF-EDIN-X

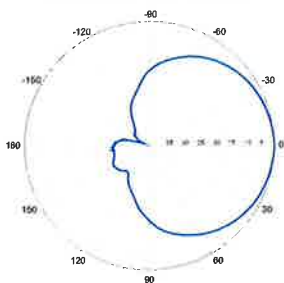


Horizontal | 750 MHz

BXA-70080-4BF-EDIN-0

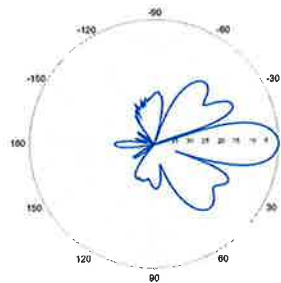


0° | Vertical | 750 MHz


BXA-70080-4BF-EDIN-2

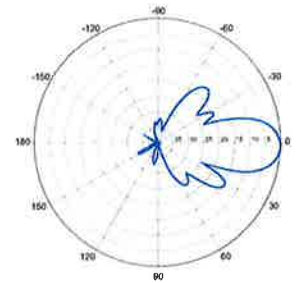


2° | Vertical | 750 MHz

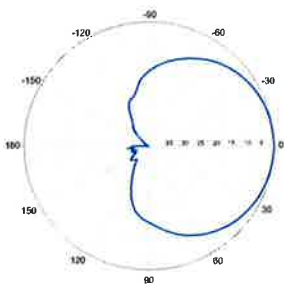

Horizontal | 850 MHz

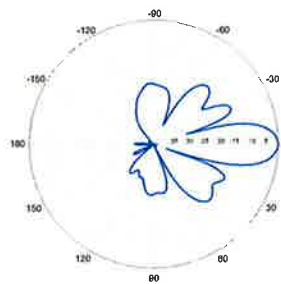

0° | Vertical | 850 MHz

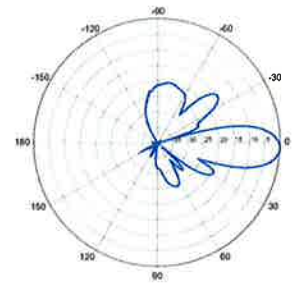


2° | Vertical | 850 MHz

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

BXA-70080-4BF-EDIN-X


X-Pol | FET Panel | 80° | 12.0 dBd

BXA-70080-4BF-EDIN-4

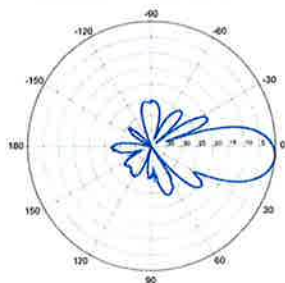


4° | Vertical | 750 MHz

BXA-70080-4BF-EDIN-6

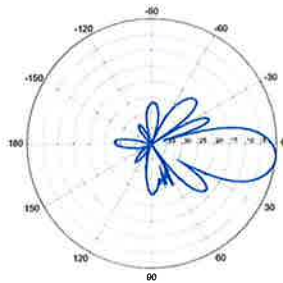


6° | Vertical | 750 MHz


BXA-70080-4BF-EDIN-8

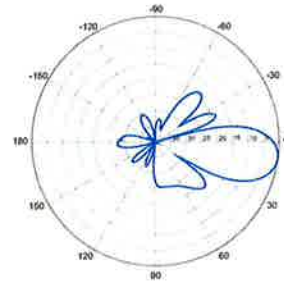


8° | Vertical | 750 MHz

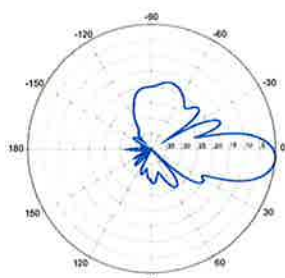

4° | Vertical | 850 MHz

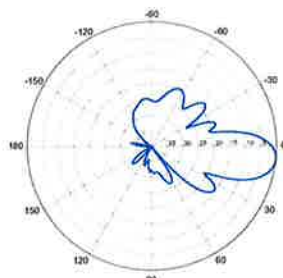


6° | Vertical | 850 MHz

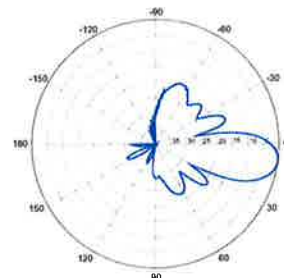


8° | Vertical | 850 MHz

BXA-70080-4BF-EDIN-10

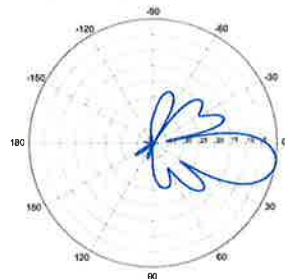


10° | Vertical | 750 MHz

BXA-70080-4BF-EDIN-12

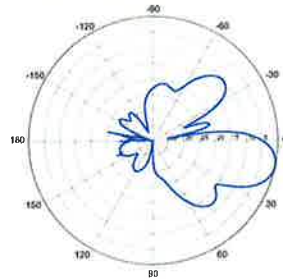


12° | Vertical | 750 MHz


BXA-70080-4BF-EDIN-14

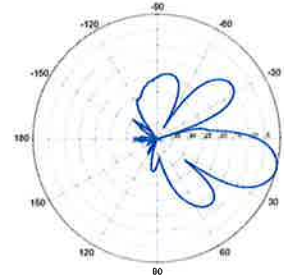


14° | Vertical | 750 MHz

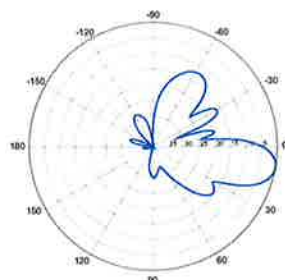

10° | Vertical | 850 MHz

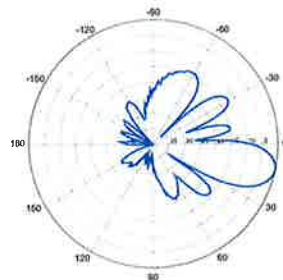

12° | Vertical | 850 MHz

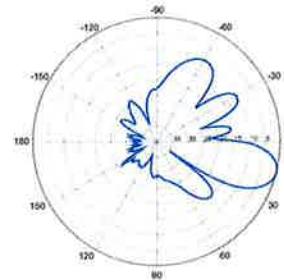

14° | Vertical | 850 MHz

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

Product Specifications

COMMScope®

POWERED BY



HBXX-6517DS-VTM

Andrew® Quad Port Antenna, 1710–2180 MHz, 65° horizontal beamwidth, RET compatible

- Superior azimuth tracking and pattern symmetry with excellent passive intermodulation suppression

Electrical Specifications

Frequency Band, MHz	1710–1880	1850–1990	1920–2180
Gain, dBi	19.0	19.1	19.2
Beamwidth, Horizontal, degrees	67	66	65
Beamwidth, Vertical, degrees	5.0	4.7	4.4
Beam Tilt, degrees	0–6	0–6	0–6
USLS, dB	18	18	18
Front-to-Back Ratio at 180°, dB	30	30	30
CPR at Boresight, dB	21	22	21
CPR at Sector, dB	10	11	9
Isolation, dB	30	30	30
VSWR Return Loss, dB	1.4 15.6	1.4 15.6	1.4 15.6
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-153
Input Power per Port, maximum, watts	350	350	350
Polarization	±45°	±45°	±45°
Impedance	50 ohm	50 ohm	50 ohm

Electrical Specifications, BASTA*

Frequency Band, MHz	1710–1880	1850–1990	1920–2180
Gain by all Beam Tilts, average, dBi	18.5	18.6	18.8
Gain by all Beam Tilts Tolerance, dB	±0.4	±0.3	±0.4
	0 ° 18.4	0 ° 18.4	0 ° 18.7
Gain by Beam Tilt, average, dBi	3 ° 18.7	3 ° 18.7	3 ° 18.9
	6 ° 18.4	6 ° 18.5	6 ° 18.6
Beamwidth, Horizontal Tolerance, degrees	±2.4	±1.7	±2.9
Beamwidth, Vertical Tolerance, degrees	±0.3	±0.3	±0.3
USLS, dB	18	19	19
Front-to-Back Total Power at 180° ± 30°, dB	25	26	26
CPR at Boresight, dB	22	23	22
CPR at Sector, dB	10	10	9

* CommScope® supports NGMN recommendations on Base Station Antenna Standards (BASTA). To learn more about the benefits of BASTA, [download the whitepaper Time to Raise the Bar on BSAs.](#)

General Specifications

Antenna Brand	Andrew®
Antenna Type	DualPol® quad
Band	Single band
Brand	DualPol® Teletilt®
Operating Frequency Band	1710 – 2180 MHz

Product Specifications

COMMSCOPE®

HBXX-6517DS-VTM



Mechanical Specifications

Color	Light gray
Lightning Protection	dc Ground
Radiator Material	Low loss circuit board
Radome Material	PVC, UV resistant
RF Connector Interface	7-16 DIN Female
RF Connector Location	Bottom
RF Connector Quantity, total	4
Wind Loading, maximum	668.0 N @ 150 km/h 150.2 lbf @ 150 km/h
Wind Speed, maximum	241.0 km/h 149.8 mph

Dimensions

Depth	166.0 mm 6.5 in
Length	1903.0 mm 74.9 in
Width	305.0 mm 12.0 in
Net Weight	19.5 kg 43.0 lb

Remote Electrical Tilt (RET) Information

Model with Factory Installed AISG 2.0 Actuator	HBXX-6517DS-A2M
RET System	Teletilt®

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant by Exemption
China RoHS SJ/T 11364-2006	Above Maximum Concentration Value (MCV)
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



Included Products


600899A-2 — Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

PCS RF MODULES

RRH1900 2X60 - HW CHARACTERISTICS

LA6.0.1/13.3

RRH2x60	
RF Output Power	2x60W
Instantaneous Bandwidth	20MHz
Transmitter	2 TX
Receiver	1900 HW version 1900A HW version
Features	2 Branch RX – LA6.0.1 4 Branch RX – LR13.3 AISG 2.0 for RET/TMA
Power	Internal Smart Bias-T -48VDC
CPRI Ports	2 CPRI Rate 3 Ports
External Alarms	4 External User Alarms
Monitor Ports	TX
Environmental	GR487 Compliance
RF Connectors	7/16 DIN (top mounted)

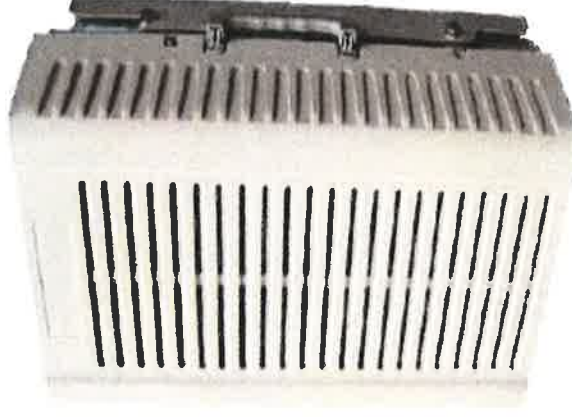

** Not a Verizon Wireless deployed product


NEW PCS RF MODULES FOR VZW

RRH2X60 - HW CHARACTERISTICS

LR14.3


	RRH2x60
RF Output Power	2x60W (4x30W HW Ready)
Instantaneous Bandwidth	60MHz
Target Reliability (Annual Return Rate)	<2%
Receiver	4 Branch Rx
Features	AISG 2.0 for RET/TMA
Power	-48VDC Internal Smart Bias-T
CPRI Ports	2 CPRI Rate 5 Ports
External Alarms	4 External User Alarms
Monitor Ports	TX, RX
Environmental	GR487 Compliance
RF Connectors	7/16 DIN (downward facing)
Dimensions	22"(h) x 12"(w) x 9.4" (d)**
Weight	55lb**

** - Includes solar shield but not mounting brackets (8 lbs.)

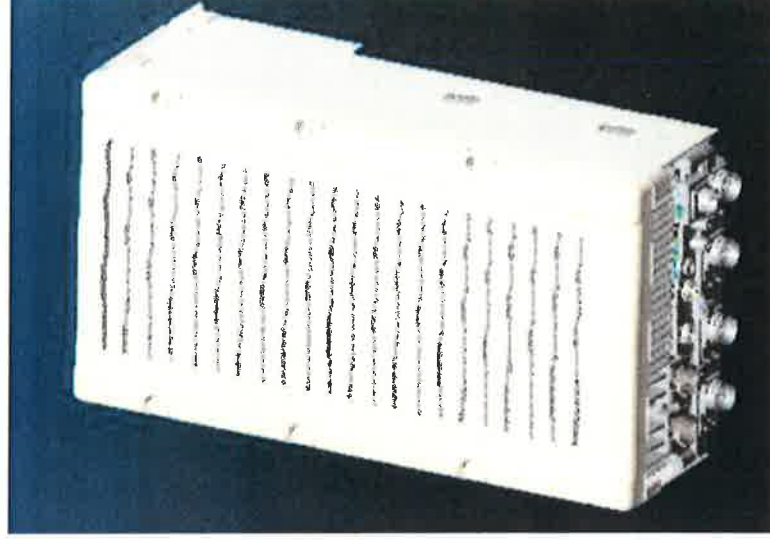

ALCATEL-LUCENT WIRELESS PRODUCT DATASHEET RRH2X60-AWS FOR BAND 4 APPLICATIONS

The Alcatel-Lucent RRH2x60-AWS is a high power, small form factor Remote Radio Head operating in the AWS frequency band (3GPP Band 4) for LTE technology. It is designed with an eco-efficient approach, providing operators with the means to achieve high quality and high capacity coverage with minimum site requirements and efficient operation.

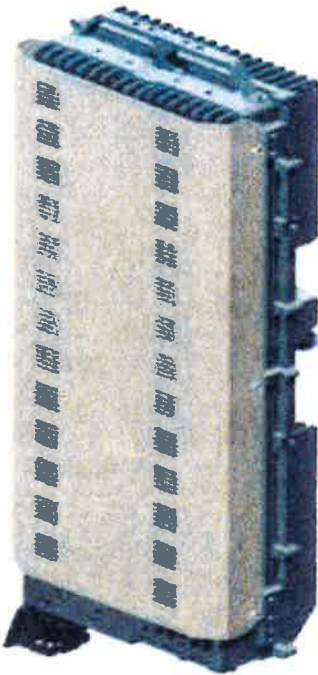

A distributed Node B expands the deployment options by using two components, a Base Band Unit (BBU) containing the digital assets and a separate RRH containing the radio-frequency (RF) elements. This modular design optimizes available space and allows the main components of a Node B to be installed separately, within the same site or several kilometers apart.

The Alcatel-Lucent RRH2x60-AWS is linked to the BBU by an optical-fiber connection carrying downlink and uplink digital radio signals

along with operations, administration and maintenance (OA&M) information.

SUPERIOR PERFORMANCE

The Alcatel-Lucent RRH2x60-AWS integrates all the latest technologies. This allows to offer best-in-class characteristics.

It delivers an outstanding 120 watts of total RF power thanks to its two transmit RF paths of 60 W each.

It is ideally suited to support multiple-input multiple-output (MIMO) 2x2 operation.

It includes four RF receivers to natively support 4-way uplink reception diversity. This improves the radio uplink coverage and this can be used to extend the cell radius commensurate with 2x2MIMO 2x60 W for the downlink.

It supports multiple discontinuous LTE carriers within an instantaneous bandwidth of 45 MHz corresponding to the entire AWS B4 spectrum.

The latest generation power amplifiers (PA) used in this product achieve high efficiency (>40%), resulting in improved power consumption figures.

OPTIMIZED TCO

The Alcatel-Lucent RRH2x60-AWS is designed to make available all the benefits of a distributed Node B, with excellent RF characteristics, with low capital expenditures (CAPEX) and low operating expenditures (OPEX).

The Alcatel-Lucent RRH2x60-AWS is a very cost-effective solution to deploy LTE MIMO.


EASY INSTALLATION

The RRH2x60-AWS includes a reversible mounting bracket which allows for ease of installation behind an antenna, or on a rooftop knee wall while providing easy access to the mid body RF connectors.


The limited space available in some sites may prevent the installation of traditional single-cabinet BTS equipment. However, many of these sites can host an Alcatel-Lucent RRH2x60-AWS installation, providing more flexible site selection and improved network quality along with greatly reduced installation time and costs.

The Alcatel-Lucent RRH2x60-AWS is a zero-footprint solution and is convection cooled without fans for silent operation, simplifying negotiations with site property owners and minimizing environmental impacts.


Installation can easily be done by a single person as the Alcatel-Lucent RRH2x60-AWS is compact and weighs about 20 kg, eliminating the need for a crane to hoist the BTS cabinet to the rooftop. A site can be in operation in less than one day.



Macro

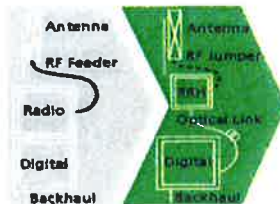

RRH for space-constrained cell sites



Distributed

FEATURES

- RRH2x60-AWS integrates two power amplifiers of 60W rating (at each antenna connector)
- Support multiple carriers over the entire 3GPP band 4
- RRH2x60-AWS is optimized for LTE operation
- RRH2x60-AWS is a very compact and lightweight product
- Advanced power management techniques are embedded to provide power savings, such as PA bias control

BENEFITS

- MIMO LTE operation with only one single unit per sector
- Improved uplink coverage with built-in 4-way receive diversity capability
- RRH can be mounted close to the antenna, eliminating nearly all losses in RF cables and thus reducing power consumption by 50% compared to conventional solutions
- Distributed configurations provide easily deployable and cost-effective solutions, near zero footprint and

silent solutions, with minimum impact on the neighborhood, which ease the deployment

- RETA and TMA support without additional hardware thanks to the AISG v2.0 port and the integrated Bias-Tees. Bias-Tees support AISG DC supply and signaling.

TECHNICAL SPECIFICATIONS

Specifications listed are hardware capabilities. Some capabilities depend on support in a specific software release or future release.

Dimensions and weights

- HxWxD : 510x285x186mm (27 l with solar shield)
- Weight : 20 kg (44 lbs)

Electrical Data

- Power Supply : -48V DC (-40.5 to -57V)
- Power Consumption (ETSI average traffic load reference) : 250W @2x60W

RF Characteristics

- Frequency band: 1710-1755, UL / 2110-2155 MHz, DL (3GPP band 4)
- Output power: 2x60W at antenna connectors
- Technology supported: LTE
- Instantaneous bandwidth: 45 MHz
- Rx diversity: 2-way and 4-way uplink reception
- Typical sensitivity without Rx diversity: -105 dBm for LTE

Connectivity

- Two CPRI optical ports for daisy chaining and up to six RRHs per fiber
- Type of optical fiber: Single-Mode (SM) and Multi-Mode (MM) SFPs
- Optical fiber length: up to 500m using MM fiber, up to 20km using SM fiber
- TMA/RETA : AISG 2.0 (RS485 connector and internal Bias-Tee)
- Six external alarms
- Surge protection for all external ports (DC and RF)

Environmental specifications

- Operating temperature: -40°C to 55°C including solar load
- Operating relative humidity: 8% to 100%
- Environmental Conditions : ETS 300 019-1-4 class 4.1E
- Ingress Protection : IEC 60529 IP65
- Acoustic Noise : Noiseless (natural convection cooling)

Safety and Regulatory Data

- EMC : 3GPP 25113, EN 301 489-1, EN 301 489-23, GR 1089, GR 3108, OET-65
- Safety : IEC60950-1, EN 60825-1, UL, ANSI/NFPA 70, CAN/CSA-C22.2
- Regulatory : FCC Part 15 Class B, CE Mark – European Directive : 2002/95/EC (ROHS); 2002/96/EC (WEEE); 1999/5/EC (R&TTE)
- Health : EN 50385

www.alcatel-lucent.com Alcatel, Lucent, Alcatel-Lucent and the Alcatel-Lucent logo are trademarks of Alcatel-Lucent. All other trademarks are the property of their respective owners. The information presented is subject to change without notice. Alcatel-Lucent assumes no responsibility for inaccuracies contained herein.

Copyright © 2012 Alcatel-Lucent. All rights reserved. M2012XXXXXX (March)

AT THE SPEED OF IDEAS™

Alcatel-Lucent



HYBRIFLEX™ RRH Hybrid Feeder Cabling Solution, 1-5/8", Single-Mode Fiber
Product Description

RFS' HYBRIFLEX Remote Radio Head (RRH) hybrid feeder cabling solution combines optical fiber and DC power for RRHs in a single lightweight aluminum corrugated cable, making it the world's most innovative solution for RRH deployments.

It was developed to reduce installation complexity and costs at Cellular sites. HYBRIFLEX allows mobile operators deploying an RRH architecture to standardize the RRH installation process and eliminate the need for and cost of cable grounding. HYBRIFLEX combines optical fiber (multi-mode or single-mode) and power in a single corrugated cable. It eliminates the need for junction boxes and can connect multiple RRHs with a single feeder. Standard RFS CELLFLEX® accessories can be used with HYBRIFLEX cable. Both pre-connectorized and on-site options are available.

Features/Benefits

- Aluminum corrugated armor with outstanding bending characteristics – minimizes installation time and enables mechanical protection and shielding
- Same accessories as 1 5/8" coaxial cable
- Outer conductor grounding – Eliminates typical grounding requirements and saves on installation costs
- Lightweight solution and compact design – Decreases tower loading
- Robust cabling – Eliminates need for expensive cable trays and ducts
- Installation of tight bundled fiber optic cable pairs directly to the RRH – Reduces CAPEX and wind load by eliminating need for interconnection
- Optical fiber and power cables housed in single corrugated cable – Saves CAPEX by standardizing RRH cable installation and reducing installation requirements
- Outdoor polyethylene jacket – Ensures long-lasting cable protection



Figure 1: HYBRIFLEX Series

Technical Specifications

Outer Conductor Armor:	Corrugated Aluminum	(mm (in))	46.5 (1.83)
Jacket:	Polyethylene, PE	(mm (in))	50.3 (1.98)
UV-Protection:	Individual and External Jacket		Yes

Weight, Approximate	(kg/m (lb/ft))	1.9 (1.30)
Minimum Bending Radius, Single Bending	(mm (in))	200 (8)
Minimum Bending Radius, Repeated Bending	(mm (in))	500 (20)
Recommended/Maximum Clamp Spacing	(m (ft))	1.0 / 1.2 (3.25 / 4.0)

DC-Resistance Outer Conductor Armor	(Ω/km (Ω/1000ft))	0.68 (0.205)
DC-Resistance Power Cable, 8.4mm² (8AWG)	(Ω/km (Ω/1000ft))	2.1 (0.307)

Version		Single-mode OM3
Quantity, Fiber Count		16 (8 pairs)
Core/Clad	(μm)	50/125
Primary Coating (Acrylate)	(μm)	245
Buffer Diameter, Nominal	(μm)	900
Secondary Protection, Jacket, Nominal	(mm (in))	2.0 (0.08)
Minimum Bending Radius	(mm (in))	104 (4.1)
Insertion Loss @ wavelength 850nm	dB/km	3.0
Insertion Loss @ wavelength 1310nm	dB/km	1.0
Standards (Meets or exceeds)		UL34-V0, UL1666 RoHS Compliant

Size (Power)	(mm (AWG))	8.4 (8)
Quantity, Wire Count (Power)		16 (8 pairs)
Size (Alarm)	(mm (AWG))	0.8 (18)
Quantity, Wire Count (Alarm)		4 (2 pairs)
Type		UV protected
Strands		19
Primary Jacket Diameter, Nominal	(mm (in))	6.8 (0.27)
Standards (Meets or exceeds)	NFPA 130, ICEA S-95-658 UL Type XHHW-2, UL 44 UL-LS Limited Smoke, UL VW-1 IEEE-383 (1974), IEEE1202/FT4 RoHS Compliant	

Installation Temperature	(°C (°F))	-40 to +65 (-40 to 149)
Operation Temperature	(°C (°F))	-40 to +65 (-40 to 149)

* This data is provisional and subject to change

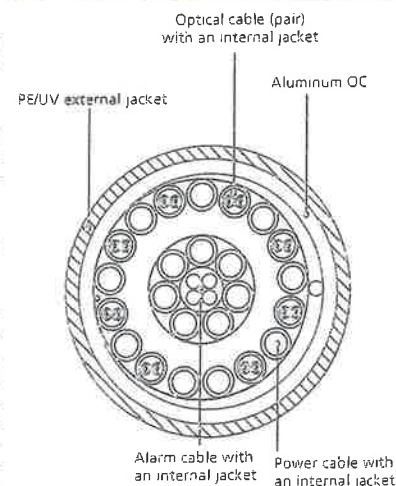


Figure 2: Construction Detail

ATTACHMENT 2

ATTACHMENT 3



Structural Evaluation	
ATC Site Number & Name	376047, Mansfield Center 2 CT, CT
Carrier Site Number & Name	117971, Mansfield North CT
Site Location	1725 Stafford Road Storrs Mansfield, CT 06268-1138, Tolland County 41.835953 N / -72.307847 W
Tower Description	170 ft Monopole
Basic Wind Speed	85 mph (Fastest Mile)
Basic Wind Speed w/ Ice	74 mph (Fastest Mile) w/ ½" ice
Code	TIA/EIA-222-F / 2003 IBC, Sec. 1609.1.1, Exception (5) & Sec. 3108.4 / 2005 & 2009 Connecticut Building Code

Existing and Reserved Equipment

Elevation ¹ (ft)		Qty	Antenna	Mount Type	Lines	Carrier
Mount	RAD					
170.0	-	-	-	-	(12) 1 5/8" Coax	Verizon
165.0	165.0	1	RRH	T-Arm	(6) 1 5/8" Coax	Metro PCS
		6	Andrew HBX-6516DS-VTM		(1) 3/8" Coax	
150.0	150.0	6	Powerwave LGP21901	Low Profile Platform	(12) 1/2" Coax (12) 1 5/8" Coax (2) 3" conduit	AT&T Mobility
		6	Powerwave LGP21401			
		6	Ericsson RRUS 11 (Band 12)			
		6	Powerwave 7770.00			
		2	KMW AM-X-CD-16-65-00T-RET			
		1	Powerwave P65-17-XLH-RR			
140.0	140.0	6	Andrew DB844F90A-SX	Low Profile Platform	(12) 1 5/8" Coax	T-Mobile
		3	Antel BXA-185063/12CF			
		3	Powerwave P65-16-XL-2			
130.0	130.0	3	Alcatel-Lucent RRH 1900MHz	Low Profile Platform	(3) 1 1/4" Hybriflex (1) 1 5/8" Hybriflex	Sprint Nextel
		3	Alcatel-Lucent 800MHz RRH			
		3	Alcatel-Lucent TD-RRH8x20-25			
		3	RFS APXV9TM14-ALU-I20			
		3	RFS APXV9ERR18-C			

Equipment to be Removed

Elevation ¹ (ft)		Qty	Antenna	Mount Type	Lines	Carrier
Mount	RAD					
170.0	170.0	3	Powerwave P65-16-XL-2	-	-	Verizon
		6	Andrew DB844F90A-SX			
		3	Antel BXA-185063/12CF			



Proposed Equipment


Elevation ¹ (ft)		Qty	Antenna	Mount Type	Lines	Carrier
Mount	RAD					
170.0	174.0	3	Antel BXA-70080-4BF-EDIN-X	Low Profile Platform	(1) 1 5/8" Hybriflex	Verizon
		3	Andrew LNX-6514DS-A1M			
		6	Commscope HBXX-6517DS-A2M			
	170.0	6	RFS FD9R6004/2C-3L			
		6	Alcatel-Lucent RRH2X60-AWS			
		1	RFS DB-T1-6Z-8AB-0Z			

¹ Mount elevation is defined as height above bottom of steel structure to bottom of mount, RAD elevation is defined as center of antenna above grade level (AGL).

Install proposed coax inside of the pole shaft.

The existing and proposed loads listed in the tables above are compared to the tower's current design capacity or previous structural analysis. The tower should be re-evaluated as future loads are added or if actual loads are found different from those listed in the tables. The subject tower and foundation **are adequate** to support the above stated loads in conformance with specified requirements.

Reviewed by:
William Garrett, PE
Chief Engineer

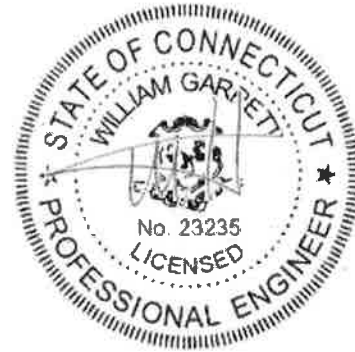

Feb 25 2015 4:14 PM

NOY/KMV