



1 Cityplace Dr, Suite 490  
Creve Coeur, MO 63141

Phone: (314) 513-0147  
www.crowncastle.com

May 26<sup>th</sup>, 2022

Melanie A. Bachman  
Executive Director  
Connecticut Siting Council  
10 Franklin Square  
New Britain, CT 06051

**RE: Notice of Exempt Modification for Verizon  
Crown Site ID# 806359; Verizon Site ID# 467373  
423 Oronoque Rd Milford, CT 06460  
Latitude: 41° 14' 16.23" N / Longitude: 73° 5' 10.00" W**

Dear Ms. Bachman:

Verizon currently maintains fifteen (15) antennas at the 100-foot mount on the existing 102-foot Monopole Tower located at 423 Oronoque Rd in Milford, CT. The property is owned by David Guernsey and the Tower by Crown Castle. Verizon now intends to replace nine (9) existing antennas. This modification/proposal includes hardware that is both 4G(LTE) and 5G capable through remote software configuration and either or both services may be turned on or off at various times.

**Planned Modifications:  
Tower:**

Remove and Replace:

(6) Amphenol BXA-171063-8BF-EDIN Antennas (**REMOVE**) – JMA MX06FR060-03 Antennas (**REPLACE**)

(3) Sweedcom SWCP2X5514 Antennas (**REMOVE**) – (3) Samsung MT6407-77A Antennas (**REPLACE**)

Install New:

(3) Samsung RFV01U-D2A RRU  
(3) Samsung RF01U-D1A RRU  
(1) Raycap OVP

Remove:

(1) Raycap OVP  
(3) Nokia UHBA B13 4x30 RRH  
(3) Nokia UHID RRH 2x40

**Ground:**



1 Cityplace Dr, Suite 490  
Creve Coeur, MO 63141

Phone: (314) 513-0147  
www.crowncastle.com

Remove:

- (3) RRH
- (1) Coax Cable
- (1) Hybrid Cable

Install New:

- (1) Hybrid Cable

The facility was approved by the Connecticut Siting Council by way of an Application for Certificate of Environmental Compatibility on April 14, 1986.

Please accept this letter as notification pursuant to Regulations of Connecticut State Agencies §16-50j-73, for construction that constitutes an exempt modification pursuant to R.C.S.A. §16-50j-72(b)(2). In accordance with R.C.S.A. §16-50j-73, a copy of this letter is being sent to Benjamin G. Blake, Mayor of the City of Milford and Joseph D. Griffith, Building Official for the City of Milford. A copy will also be sent to the property owner.

1. The proposed modifications will not result in an increase in the height of the existing tower.
2. The proposed modifications will not require the extension of the site boundary.
3. The proposed modification will not increase noise levels at the facility by six decibels or more, or to levels that exceed state and local criteria.
4. The operation of the replacement antennas will not increase radio frequency emissions at the facility to a level at or above the Federal Communication Commission safety standard.
5. The proposed modifications will not cause a change or alteration in the physical or environmental characteristics of the site.
6. The existing structure and its foundation can support the proposed loading.

For the foregoing reasons, Verizon respectfully submits that the proposed modifications to the above-reference telecommunications facility constitutes an exempt modification under R.C.S.A. §16-50j-72(b)(2).



1 Cityplace Dr, Suite 490  
Creve Coeur, MO 63141

Phone: (314) 513-0147  
[www.crowncastle.com](http://www.crowncastle.com)

Sincerely,

*Colin Robinson*

Colin Robinson  
Project Manager  
NETWORK BUILDING + CONSULTING  
100 Apollo Drive Suite 303  
Chelmsford, MA 01824  
[crobenson@nbcllc.com](mailto:crobenson@nbcllc.com)  
(360) 561-3311

cc:

Benjamin G. Blake, Mayor  
City of Milford, CT  
110 River St  
Milford, CT 06460  
203-783-3201

Joseph D. Griffith, Building Official  
City of Milford, CT  
70 West River St.  
Milford, CT 06460  
203-783-3374

David Guernsey  
4017 Washington Rd. PMB 353  
McMurray PA 15317

**Colin Robinson**

---

**From:** TrackingUpdates@fedex.com  
**Sent:** Friday, May 27, 2022 10:30 AM  
**To:** Colin Robinson  
**Subject:** FedEx Shipment 776970611009: Your package has been delivered



Hi. Your package was delivered Fri, 05/27/2022 at 10:27am.



Delivered to 110 RIVER ST, MILFORD, CT 06460

**OBTAIN PROOF OF DELIVERY**

<b>TRACKING NUMBER</b>	<a href="#">776970611009</a>
<b>FROM</b>	NB+C 100 Apollo Dr. Suite 303 CHELMSFORD, MA, US, 01824
<b>TO</b>	City of Milford, CT Benjamin G. Blake, Mayor



110 River St  
MILFORD, CT, US, 06460

<b>REFERENCE</b>	100788 NB+C
<b>SHIPPER REFERENCE</b>	100788 NB+C
<b>SHIP DATE</b>	Thu 5/26/2022 06:47 PM
<b>PACKAGING TYPE</b>	FedEx Envelope
<b>ORIGIN</b>	CHELMSFORD, MA, US, 01824
<b>DESTINATION</b>	MILFORD, CT, US, 06460
<b>SPECIAL HANDLING</b>	Deliver Weekday
<b>NUMBER OF PIECES</b>	1
<b>TOTAL SHIPMENT WEIGHT</b>	1.00 LB
<b>SERVICE TYPE</b>	FedEx Priority Overnight



## Get the FedEx<sup>®</sup> Mobile app

Create shipments, receive tracking alerts, redirect packages to a FedEx retail location for pickup, and more from the palm of your hand  
- **Download now.**



[FOLLOW FEDEX](#)

**Colin Robinson**

---

**From:** TrackingUpdates@fedex.com  
**Sent:** Friday, May 27, 2022 9:35 AM  
**To:** Colin Robinson  
**Subject:** FedEx Shipment 776970697806: Your package has been delivered



Hi. Your package was  
delivered Fri, 05/27/2022 at  
9:33am.



Delivered to 4017 WASHINGTON RD, MC MURRAY, PA 15317  
Received by T.MANFREDI

[OBTAIN PROOF OF DELIVERY](#)

**TRACKING NUMBER** [776970697806](#)

**FROM** NB+C  
100 Apollo Dr.  
Suite 303  
CHELMSFORD, MA, US, 01824

**TO** David Guernsey  
4017 Washington Rd.

PMB 353  
MC MURRAY, PA, US, 15317

**REFERENCE** 100788 NB+C

**SHIPPER REFERENCE** 100788 NB+C

**SHIP DATE** Thu 5/26/2022 06:47 PM

**DELIVERED TO** Receptionist/Front Desk

**PACKAGING TYPE** FedEx Envelope

**ORIGIN** CHELMSFORD, MA, US, 01824

**DESTINATION** MC MURRAY, PA, US, 15317

**SPECIAL HANDLING** Deliver Weekday

**NUMBER OF PIECES** 1

**TOTAL SHIPMENT WEIGHT** 1.00 LB

**SERVICE TYPE** FedEx Priority Overnight



## Get the FedEx<sup>®</sup> Mobile app

Create shipments, receive tracking alerts, redirect packages to a FedEx retail location for pickup, and more from the palm of your hand  
- **Download now.**



**Colin Robinson**

---

**From:** TrackingUpdates@fedex.com  
**Sent:** Friday, May 27, 2022 10:26 AM  
**To:** Colin Robinson  
**Subject:** FedEx Shipment 776970660176: Your package has been delivered



Hi. Your package was  
delivered Fri, 05/27/2022 at  
10:19am.



Delivered to 70 W RIVER ST, MILFORD, CT 06460  
Received by T.HALL

**OBTAIN PROOF OF DELIVERY**

**TRACKING NUMBER** [776970660176](#)

**FROM** NB+C  
100 Apollo Dr.  
Suite 303  
CHELMSFORD, MA, US, 01824

**TO** City of Milford, CT  
Joseph D. Griffith, Building Offici

70 West River St.  
MILFORD, CT, US, 06460

<b>REFERENCE</b>	100788 NB+C
<b>SHIPPER REFERENCE</b>	100788 NB+C
<b>SHIP DATE</b>	Thu 5/26/2022 06:47 PM
<b>DELIVERED TO</b>	Receptionist/Front Desk
<b>PACKAGING TYPE</b>	FedEx Envelope
<b>ORIGIN</b>	CHELMSFORD, MA, US, 01824
<b>DESTINATION</b>	MILFORD, CT, US, 06460
<b>SPECIAL HANDLING</b>	Deliver Weekday
<b>NUMBER OF PIECES</b>	1
<b>TOTAL SHIPMENT WEIGHT</b>	0.50 LB
<b>SERVICE TYPE</b>	FedEx Priority Overnight



## Get the FedEx<sup>®</sup> Mobile app

Create shipments, receive tracking alerts, redirect packages to a FedEx retail location for pickup, and more from the palm of your hand  
- **Download now.**



# Exhibit A

## **Original Facility Approval**

AN APPLICATION OF METRO MOBILE CTS OF NEW HAVEN, INC., FOR A CERTIFICATE OF ENVIRONMENTAL COMPATIBILITY AND PUBLIC NEED FOR THE CONSTRUCTION, MAINTENANCE, AND OPERATION OF FACILITIES TO PROVIDE CELLULAR SERVICE IN NEW HAVEN COUNTY. : CONNECTICUT SITING  
: COUNCIL  
: April 14, 1986

D E C I S I O N A N D O R D E R

Pursuant to the foregoing opinion, the Council hereby directs that a certificate of environmental compatibility and public need as required by section 16-50k of the General Statutes of Connecticut (CGS) be issued to Metro Mobile CTS of New Haven, Inc., for the construction, maintenance, and operation of cellular mobile phone telecommunication towers and associated equipment in the towns of Wolcott, Naugatuck, West Haven (existing tower), Milford, Hamden (existing tower), Guilford, and North Branford subject to the conditions below.

1. The proposed and alternate Beacon Falls sites are rejected without prejudice.
2. The Wolcott tower shall be constructed to meet Zone C wind loading with 1" of radial ice and shall not exceed 180' in height excluding antennas.
3. The Naugatuck tower shall not exceed 160' in height, excluding antennas. The certificate holder shall offer to remove the existing privately owned, unused tower now on the site.
4. Any future actions requiring the removal of the existing West Haven or Hamden towers to be shared by the certificate holder shall also apply to the equipment mounted on those towers by the certificate holder, regardless of that equipment's status under Chapter 277a of the CGS.

5. The Milford tower shall be a monopole structure not to exceed 100' in height, excluding antennas.
6. The Guilford tower shall be a monopole structure not to exceed 150' in height, excluding antennas.
7. The North Branford Route 17 site is rejected. The North Branford East Reeds Gap Road tower shall not exceed 160' in height, excluding antennas.
8. The certificate holder shall submit a development and management plan for the Wolcott, Naugatuck, Milford, Hamden, Guilford, and North Branford sites pursuant to sections 16-50j-75 through 16-50j-77 of the RSA, except that irrelevant items in section 16-50j-76 need only be identified as such. In addition to the requirements of section 16-50j-76, the D&M plan shall provide plans for evergreen screening around the fenced perimeter at the Wolcott, Milford, Hamden, Guilford, and North Branford sites. The D&M plan shall include a proposal for painting the approved monopole structures to blend with the sky. Any changes to specifications in the D&M plan must be approved by the Council prior to facility operation.
9. All certified facilities shall be constructed, operated, and maintained as specified in the Council's record and in the site development and management plan required by order 8.
10. The certificate holder shall permit public or private entities to share space on the towers approved herein, for due consideration received, or shall provide any requesting entity with specific legal, technical, environmental, or economic reasons precluding such tower sharing. In addition to complying with 16-50j-73, the



certificate holder shall notify the Council of the addition of any equipment to any approved tower.

11. A fence not lower than 8' shall surround each tower and associated equipment.
12. Unless necessary to comply with order 13, below, no lights shall be installed on any of these towers.
13. The facilities' construction and any future tower sharing shall be in accordance with all applicable federal, state, and municipal laws and regulations. Shared uses by entities not subject to jurisdiction pursuant to sections 16-50i and 16-50k of the CGS shall be subject to all applicable federal, state, and municipal laws and regulations.
14. Construction activities shall take place during daylight working hours.
15. This decision and order shall be void and the towers and associated equipment shall be dismantled and removed, or reapplication for any new use shall be made to the CSC before any such new use is made, if the towers do not provide or permanently cease to provide cellular service following completion of construction.
16. This decision and order shall be void if all construction authorized herein is not completed within three years of the issuance of this decision, or within three years of the completion of any appeal if appeal of this decision is taken, unless otherwise approved by the Council.

Pursuant to CGS section 16-50p, we hereby direct that a copy of the decision and order shall be served on each person listed below. A notice

of the issuance shall be published in The Record-Journal, The New Haven Register, The Branford Review, The Evening Sentinel, The Waterbury American, and The Waterbury Republican.

The parties to this proceeding are:

Metro Mobile CTS of New Haven, Inc. (Applicant)  
5 Eversley Avenue  
Norwalk, Connecticut 06855

ATTN: Armand Mascioli  
General Manager

Mr. Kevin B. Sullivan, Esq. (its attorneys)  
Byrne, Slater, Sandler, Shulman & Rouse, P.C.  
111 Pearl Street  
P.O. Box 3216  
Hartford, Connecticut 06103

Mr. Richard Rubin, Esq.  
Fleischman and Walsh, P.C.  
1725 N Street, N.W.  
Washington, D.C. 20036

Guilford Conservation Commission

represented by:

Mr. David B. Damer  
Chairman  
Guilford Conservation Commission  
440 Great Hill Road  
Guilford, Connecticut 06437

Mr. Robert W. Griswold, Jr.  
100 Rimmon Hill Road  
Beacon Falls, Connecticut 06403

Town of Hamden  
Memorial Town Hall  
2372 Whitney Avenue  
Hamden, Connecticut 06518

ATTN: Shirley Gonzales  
Town Planner

Guilford Planning and Zoning Commission

represented by:

Mr. David W. Fisher  
Chairman  
Town Hall  
31 Park Street  
Guilford, Connecticut 06437

Town of Hamden

represented by:

John DeNicola, Jr.  
Mayor  
Town of Hamden  
Memorial Town Hall  
2372 Whitney Avenue  
New Haven, Connecticut 06518

Citizens Park Council of New Haven

represented by:

Mr. John J. Ciarleglio  
President  
Citizens Park Council  
of New Haven  
36 Elmwood Road  
New Haven, Connecticut 06515

Mr. Thomas V. Keating  
343 Rimmon Hill Road  
Beacon Falls, Connecticut 06403

Ms. Evelyn M. Sirowich  
245 Rimmon Hill Road  
Beacon Falls, Connecticut 06403

Mr. Jack B. Levine  
11 White Birch Lane  
Beacon Falls, Connecticut 06403

Southern New England Telephone Company

represented by:

Mr. Peter J. Tyrrell, Esq.  
227 Church Street  
New Haven, Connecticut 06506

Mr. Dennis Bialecki  
96 West Road  
Beacon Falls, Connecticut 06403

Brittany Woods Homeowner's Association

represented by:

Mr. Stephen P. DeI Sole, Esq.  
DeI Sole & DeI Sole  
152 Temple Street  
P.O. Box 405  
New Haven, Connecticut 06502-0405

Ms. Barbara G. Schlein  
Box 2993 Westville Station  
New Haven, Connecticut 06515

Mr. & Mrs. Joseph T. Farrell, Jr.  
334 Rimmon Hill Road  
Beacon Falls, Connecticut 06403

Town of Beacon Falls

represented by:

The Honorable Leonard F. D'Amico  
First Selectman  
10 Maple Avenue  
Beacon Falls, Connecticut 06403

West Rock Ridge Park Association

represented by:

Mr. William L. Doheny Jr., D.D.S.  
President  
220 Mountain Road  
Hamden, Connecticut 06514

Department of Parks,  
Recreation & Trees

represented by:

Mr. Robert G. Sheeley  
Director  
Parks, Recreation & Trees  
P.O. Box 1416  
New Haven, Connecticut 06506

Town of Wallingford

represented by:

William W. Dickinson, Jr.  
Mayor  
Municipal Building  
350 Center Street  
P.O. Box 427  
Wallingford, Connecticut 06492

New Haven Sierra Club

represented by:

Ms. Laurie Klein  
270 Edgewood Avenue  
New Haven, Connecticut 06511

Peter M. Lerner  
State Representative  
8 Merritt Avenue  
Woodbridge, Connecticut 06525

Carleton J. Benson  
State Representative  
161 Scott Road  
Prospect, Connecticut 06712

Dr. Stephen Collins (service waived)  
Vice Chairman  
West Rock State Park  
Advisory Council  
Bethany, Connecticut

Mr. Louis Melillo (service waived)  
985 Wintergreen Avenue  
Hamden, Connecticut

Mr. John McGeever (service waived)  
339 Rimmon Hill  
Beacon Falls, Connecticut 06403

Senator John Consoli (service waived)  
51 Luke Hill Road  
Bethany, Connecticut 06525

Representative George P. Bassing (service waived)  
14 Oakwood Drive  
Seymour, Connecticut 06483

Dr. George D. Whitney (service waived)  
858 Oakwood Road  
Orange, Connecticut

Mr. Steve Molnar (service waived)  
205 West Road  
Beacon Falls, Connecticut

Mr. James W. Grandy (service waived)  
President  
Hamden Land Conservation Trust  
Hamden, Connecticut

Senator Richard S. Eaton (service waived)  
269 Mulberry Point Road  
Guilford, Connecticut 06437

Representative Robert M. Ward  
719 Totoket Road  
Northford, Connecticut 06472

Town of North Branford

represented by:

John Gesmonde, Esquire  
3127 Whitney Avenue  
Hamden, Connecticut 06518

Regina Smith  
1887 Middletown Avenue  
Northford, Connecticut 06472

(service waived)

Richard A. Nizolek  
The Restland Farm Corporation  
Route 17  
Northford, Connecticut 06472

Mary Liska  
83 Reeds Gap Road  
Northford, Connecticut 06472

Ben Bullard  
50 Christmas Hill Road  
Guilford, Connecticut 06437

(service waived)

Roland Robichaud  
31 Berncliff Drive  
North Branford, Connecticut 06471

(service waived)

Irene Flynn  
1926 Middletown Avenue  
Northford, Connecticut 06472

(service waived)

Charles Pope  
199 Donalds Road  
Guilford, Connecticut 06437

Richard Abate  
131 Manor Road  
Guilford, Connecticut 06437

(service waived)

City of Milford

represented by:

Mayor Alberta Jagoe  
Alderman Maurice Condon  
Alderman Frederick Lisman  
City Hall  
River Street  
Milford, Connecticut 06460

Thomas Scelfo  
81 Berncliff Drive  
North Branford, Connecticut 06471

(service waived)

Senator Thomas Scott  
22 Meyers Court  
Milford, Connecticut 06460

(service waived)

Helen Moore  
385 Oronoque Road  
Milford, Connecticut 06460

(service waived)



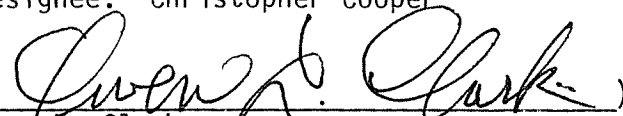


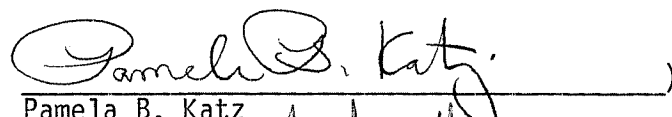
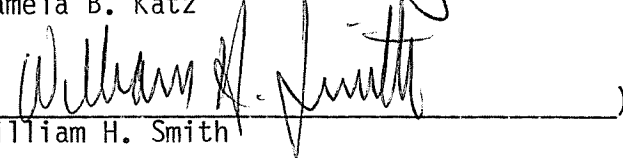

William Barberi  
298 Oronoque Road  
Milford, Connecticut 06460

(service waived)

C E R T I F I C A T I O N

The undersigned members of the Connecticut Siting Council hereby certify that they have heard this case or read the record thereof, and that we voted as follows:

Dated at New Britain, Connecticut, this 14th day of April, 1986.


<u>Council Members</u>	<u>Vote Cast</u>
 Gloria Dibble Pond Chairperson	Yes
_____) Commissioner John Downey Designee: Commissioner Peter G. Boucher	Absent
 Commissioner Stanley Pad Designee: Christopher Cooper	No
 Owen L. Clark	Yes
 Mortimer A. Gelston	Yes
 James G. Horsfall	Yes
 Pamela B. Katz	Yes
 William H. Smith	No
 Colin C. Tait	No



STATE OF CONNECTICUT            )  
  :  
COUNTY OF HARTFORD            )        ss.        New Britain, April 14, 1986

I hereby certify that the foregoing is a true and correct copy of the decision and order issued by the Connecticut Siting Council, State of Connecticut.

ATTEST:

  
\_\_\_\_\_  
Christopher S. Wood, Executive Director  
Connecticut Siting Council

# Exhibit B

## **Property Card**

# 423 ORONOQUE RD

**Location** 423 ORONOQUE RD

**Mblu** 74/ 925/ 3/A /

**Acct#** 008119

**Owner** GUERNSEY DAVID

**Assessment** \$256,100

**Appraisal** \$365,860

**PID** 17142

**Building Count** 1

## Current Value

Appraisal			
Valuation Year	Improvements	Land	Total
2020	\$356,170	\$9,690	\$365,860

Assessment			
Valuation Year	Improvements	Land	Total
2020	\$249,320	\$6,780	\$256,100

## Owner of Record

<b>Owner</b>	GUERNSEY DAVID	<b>Sale Price</b>	\$0
<b>Other</b>	C/O CROWN ATLANTIC CO LLC	<b>Certificate</b>	
<b>Address</b>	4017 WASHINGTON RD PMB 353 MCMURRAY, PA 15317	<b>Book &amp; Page</b>	03011/0131
		<b>Sale Date</b>	08/08/2005

## Ownership History

Ownership History				
Owner	Sale Price	Certificate	Book & Page	Sale Date
GUERNSEY DAVID	\$0		03011/0131	08/08/2005
GUERNSEY DAVID & ET AL* & SURV	\$0		02370/0420	09/09/1999
GUERNSEY DAVID & VIRGINIA S & SUR	\$0		02222/0543	06/02/1997
GUERNSEY DAVID	\$0		02222/0542	06/02/1997
GUERNSEY ADDIE E EST	\$0		02107/0247	03/07/1995

## Building Information

### Building 1 : Section 1

**Year Built:**

**Living Area:**

0

Replacement Cost: \$0

Building Percent Good:

Replacement Cost

Less Depreciation: \$0

**Building Attributes**

Field	Description
Style	Outbuildings
Model	
Grade:	
Stories:	
Occupancy	
Exterior Wall 1	
Exterior Wall 2	
Roof Structure:	
Roof Cover	
Interior Wall 1	
Interior Wall 2	
Interior Flr 1	
Interior Flr 2	
Heat Fuel	
Heat Type:	
AC Type:	
Total Bedrooms:	
Total Bthrms:	
Total Half Baths:	
Total Xtra Fixtrs:	
Total Rooms:	
Bath Description:	
Kitchen Descrip:	
Num Kitchens	
Cndtn	
Usrflid 103	
Int Condition:	
Solar Panels	
House Generator	
Usrflid 107	
Num Park	
Fireplaces	
Usrflid 108	
Usrflid 101	
Usrflid 102	
Usrflid 100	

**Building Photo**



(<http://images.vgsi.com/photos/MilfordCTPhotos/default.jpg>)

**Building Layout**

Building Layout (ParcelSketch.ashx?pid=17142&bid=17400)

Building Sub-Areas (sq ft)	Legend
No Data for Building Sub-Areas	

Usrflid 300	
Usrflid 301	

**Extra Features**

Extra Features	<u>Legend</u>
No Data for Extra Features	

**Land**

**Land Use**

**Use Code** 434V  
**Description** CELL TOWER MDL-00  
**Zone** R30  
**Neighborhood** F  
**Alt Land Appr** No  
**Category**

**Land Line Valuation**

**Size (Acres)** 0.26  
**Frontage** 0  
**Depth** 0  
**Assessed Value** \$6,780  
**Appraised Value** \$9,690

**Outbuildings**

Outbuildings						<u>Legend</u>
Code	Description	Sub Code	Sub Description	Size	Value	Bldg #
SHD2	W/LIGHTS ETC			300.00 S.F.	\$6,170	1
CEL1	CEL TWR SITE			1.00 UNITS	\$350,000	1

**Valuation History**

Appraisal			
Valuation Year	Improvements	Land	Total
2019	\$356,170	\$9,690	\$365,860
2018	\$356,170	\$9,690	\$365,860
2017	\$356,170	\$9,690	\$365,860
2016	\$356,170	\$9,690	\$365,860

Assessment			
Valuation Year	Improvements	Land	Total
2019	\$249,320	\$6,780	\$256,100
2018	\$249,320	\$6,780	\$256,100
2017	\$249,320	\$6,780	\$256,100
2016	\$249,320	\$6,780	\$256,100



# Exhibit C

## **Construction Drawings**






**VERIZON SITE NUMBER:** 467373  
**VERIZON SITE NAME:** MILFORD CT  
**SITE TYPE:** MONOPOLE  
**TOWER HEIGHT:** 100'-0"

**BUSINESS UNIT #:** 806359  
**SITE ADDRESS:** 423 ORONOQUE RD  
**COUNTY:** MILFORD, CT 06460  
**JURISDICTION:** NEW HAVEN  
**TOWN OF MILFORD**

**VERIZON 5G L-SUB6 - CARRIER ADD**

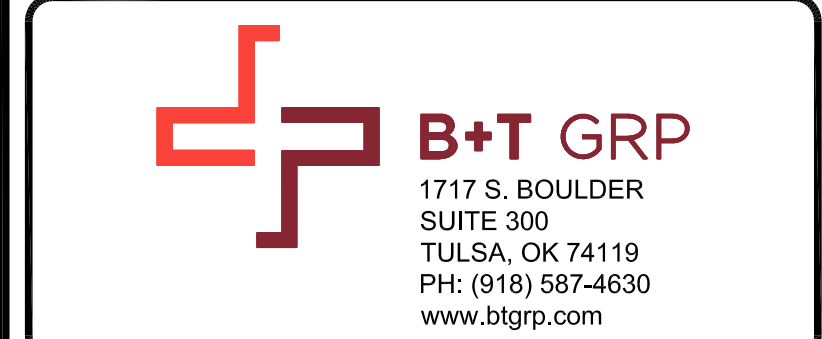

**VERIZON SITE NUMBER:**  
467373  
  
**BU #:** 806359  
**NHV 104 943122**  
  
 423 ORONOQUE RD  
 MILFORD, CT 06460  
  
 EXISTING 100'-0" MONOPOLE

**ISSUED FOR:**

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	4/26/22	DAS	CONSTRUCTION	MTJ

**PROJECT DESCRIPTION**

THE PURPOSE OF THIS PROJECT IS TO ENHANCE BROADBAND CONNECTIVITY AND CAPACITY TO THE EXISTING ELIGIBLE WIRELESS FACILITY.

**TOWER SCOPE OF WORK:**

- REMOVE (6) ANTENNAS
- REMOVE (3) RRHS
- REMOVE (1) OVP
- REMOVE (1) COAX
- REMOVE (1) HYBRID CABLE
- RELOCATE (6) ANTENNAS
- INSTALL (9) ANTENNAS
- INSTALL (6) RRHS
- INSTALL (1) OVP
- INSTALL (1) HYBRID CABLE

**GROUND SCOPE OF WORK:**

- REMOVE (3) RRHS

**NOTE:**  
 PRIOR TO ACCESSING/ENTERING THE SITE YOU MUST CONTACT THE CROWN NOC AT (800) 788-7011 & CROWN CONSTRUCTION MANAGER

**PROFESSIONAL ENGINEER**  
 No. 23924  
 4/26/22

B&T ENGINEERING, INC.  
 PEC.0001564  
 Expires 2/10/23

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

<b>SHEET NUMBER:</b> <b>T-1</b>	<b>REVISION:</b> <b>0</b>
------------------------------------	------------------------------

**SITE INFORMATION**

CROWN CASTLE USA INC. SITE NAME:	NHV 104 943122
SITE ADDRESS:	423 ORONOQUE RD MILFORD, CT 06460
COUNTY:	NEW HAVEN
MAP/PARCEL #:	74/925/3/A
AREA OF CONSTRUCTION:	EXISTING
LATITUDE:	41° 14' 16.23"
LONGITUDE:	73° 5' 10.00"
LAT/LONG TYPE:	NAD83
GROUND ELEVATION:	165'-0"
CURRENT ZONING:	R-30
JURISDICTION:	TOWN OF MILFORD
OCCUPANCY CLASSIFICATION:	U
TYPE OF CONSTRUCTION:	IIB
A.D.A. COMPLIANCE:	FACILITY IS UNMANNED AND NOT FOR HUMAN HABITATION
PROPERTY OWNER:	GUERNSEY DAVID C/O CROWN ATLANTIC CO LLC 4017 WASHINGTON RD PMB 353 MCMURRAY, PA 15317
TOWER OWNER:	CROWN CASTLE 2000 CORPORATE DRIVE CANONSBURG, PA 15317
CARRIER/APPLICANT:	VERIZON WIRELESS 20 ALEXANDER DRIVE, 2ND FLOOR WALLINGFORD, CT 06492
ELECTRIC PROVIDER:	NOT PROVIDED
TELCO PROVIDER:	NOT PROVIDED

**DRAWING INDEX**

SHEET #	SHEET DESCRIPTION
T-1	TITLE SHEET
T-2	GENERAL NOTES
C-1	SITE PLAN
C-2	TOWER ELEVATION & ANTENNA PLANS
C-3	EQUIPMENT SCHEDULES
C-4	EQUIPMENT DETAILS
C-5	EQUIPMENT DETAILS
C-6	PLUMBING DIAGRAM
G-1	GROUNDING DETAILS
G-2	GROUNDING DETAILS
ATTACHED	MOUNT MOD DRAWINGS

ALL DRAWINGS CONTAINED HEREIN ARE FORMATTED FOR 22X34. CONTRACTOR SHALL VERIFY ALL PLANS AND EXISTING DIMENSIONS AND CONDITIONS ON THE JOB SITE AND SHALL IMMEDIATELY NOTIFY THE ENGINEER IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK OR BE RESPONSIBLE FOR SAME.

**APPROVALS**

SIGNATURE	DATE
_____	_____
_____	_____
_____	_____
_____	_____

**CONTRACTOR PMI REQUIREMENTS**

PMI ACCESSED AT	https://pmi.vxwsmart.com
SMART TOOL VENDOR PROJECT NUMBER	10063096
VzW LOCATION CODE (PSLC)	467373

\*\*\* PMI AND REQUIREMENTS ALSO EMBEDDED IN MOUNT ANALYSIS REPORT

**MOUNT MODIFICATION REQUIRED**      **Y**

**VzW APPROVED SMART KIT VENDORS**

REFER TO MOUNT MODIFICATION DRAWINGS PAGE FOR VzW SMART KIT APPROVED VENDORS

**LOCATION MAP**

DRIVING DIRECTIONS FROM VERIZON LOCAL OFFICE (20 ALEXANDER ST, BRISTOL, CT 06010)  
 HEAD EAST ON ALEXANDER ST TOWARD EMMETT ST. TURN RIGHT AT THE 1ST CROSS STREET ONTO EMMETT ST. TURN RIGHT ONTO RONZO RD. TURN LEFT ONTO CT-229 S/MIDDLE ST. CONTINUE TO FOLLOW CT-229 S. TURN RIGHT ONTO THE I-84 W RAMP TO WATERBURY. TAKE I-691 E AND CT-15 S TO WELLINGTON RD IN MILFORD. TAKE EXIT 55 FROM CT-15 S. MERGE ONTO I-84. TAKE EXIT 27 FOR I-691 E TOWARD MERIDEN. CONTINUE ONTO I-691 E. TAKE EXIT 10 FOR CT-15 S/WILBUR CROSS PARKWAY TOWARD I-91 S/NEW HAVEN. MERGE ONTO CT-15 S. KEEP RIGHT TO STAY ON CT-15 S. FOLLOW SIGNS FOR W CROSS PKWY. TAKE EXIT 55 TOWARD WHEELERS FARM RD. FOLLOW WHEELERS FARM RD AND E RUTLAND RD TO ORONOQUE RD. CONTINUE ONTO WELLINGTON RD. TURN LEFT ONTO WHEELERS FARM RD. TURN RIGHT ONTO E RUTLAND RD. CONTINUE ONTO ORONOQUE RD. TURN RIGHT TO STAY ON ORONOQUE RD. THE SITE IS ON THE RIGHT

**APPLICABLE CODES/REFERENCE DOCUMENTS**

ALL WORK SHALL BE PERFORMED AND MATERIALS INSTALLED IN ACCORDANCE WITH THE CURRENT EDITIONS OF THE FOLLOWING CODES AS ADOPTED BY THE LOCAL GOVERNING AUTHORITIES. NOTHING IN THESE PLANS IS TO BE CONSTRUED TO PERMIT WORK NOT CONFORMING TO THESE CODES:

CODE TYPE	CODE
BUILDING	2018 IBC
ELECTRICAL	2017 NEC

**REFERENCE DOCUMENTS:**

STRUCTURAL ANALYSIS: BY OTHERS  
 DATED: \_\_\_\_\_

MOUNT ANALYSIS: MASER CONSULTING CONNECTICUT  
 DATED: 1/24/2022

RFDS REVISION: 0  
 DATED: 1/15/2021

ORDER ID: 552661  
 REVISION: 0

CALL CONNECTICUT ONE CALL (800) 922-4455 CBYD.COM  
 CALL 2 WORKING DAYS BEFORE YOU DIG!

**PROJECT TEAM**

A&E FIRM:	B+T GROUP 1717 S. BOULDER AVE. TULSA, OK 74119 MARVIN PHILLIPS marvin.phillips@btgrp.com
CROWN CASTLE USA INC. DISTRICT CONTACTS:	1200 MACARTHUR BLVD, SUITE 200 MAHWAH, NJ 07430  WILLIAM GATES - PROJECT MANAGER WILLIAM.GATES@CROWNCastle.COM JASON D'AMICO - CONSTRUCTION MANAGER JASON.D'AMICO@CROWNCastle.COM
VERIZON CONTACT:	TIMOTHY PARKS TIMOTHY.PARKS@VERIZONWIRELESS.COM



CROWN CASTLE USA INC. SITE ACTIVITY REQUIREMENTS:

- 1. NOTICE TO PROCEED- NO WORK SHALL COMMENCE PRIOR TO CROWN CASTLE USA INC. WRITTEN NOTICE TO PROCEED (NTP) AND THE ISSUANCE OF A PURCHASE ORDER. PRIOR TO ACCESSING/ENTERING THE SITE YOU MUST CONTACT THE CROWN CASTLE USA INC. NOC AT 800-788-7011 & THE CROWN CASTLE USA INC. CONSTRUCTION MANAGER.
2. "LOOK UP" - CROWN CASTLE USA INC. SAFETY CLIMB REQUIREMENT: THE INTEGRITY OF THE SAFETY CLIMB AND ALL COMPONENTS OF THE CLIMBING FACILITY SHALL BE CONSIDERED DURING ALL STAGES OF DESIGN, INSTALLATION, AND INSPECTION.
3. PRIOR TO THE START OF CONSTRUCTION, ALL REQUIRED JURISDICTIONAL PERMITS SHALL BE OBTAINED. THIS INCLUDES, BUT IS NOT LIMITED TO, BUILDING, ELECTRICAL, MECHANICAL, FIRE, FLOOD ZONE, ENVIRONMENTAL, AND ZONING.
4. ALL CONSTRUCTION MEANS AND METHODS; INCLUDING BUT NOT LIMITED TO, ERECTION PLANS, RIGGING PLANS, CLIMBING PLANS, AND RESCUE PLANS SHALL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR...

GREENFIELD GROUNDING NOTES:

- 1. ALL GROUND ELECTRODE SYSTEMS (INCLUDING TELECOMMUNICATION, RADIO, LIGHTNING PROTECTION AND AC POWER GES'S) SHALL BE BONDED TOGETHER AT OR BELOW GRADE, BY TWO OR MORE COPPER BONDING CONDUCTORS IN ACCORDANCE WITH THE NEC.
2. THE CONTRACTOR SHALL PERFORM IEEE FALL-OFF-POTENTIAL RESISTANCE TO EARTH TESTING (PER IEEE 1100 AND 81) FOR GROUND ELECTRODE SYSTEMS, THE CONTRACTOR SHALL FURNISH AND INSTALL SUPPLEMENTAL GROUND ELECTRODES AS NEEDED TO ACHIEVE A TEST RESULT OF 5 OHMS OR LESS.
3. THE CONTRACTOR IS RESPONSIBLE FOR PROPERLY SEQUENCING GROUNDING AND UNDERGROUND CONDUIT INSTALLATION AS TO PREVENT ANY LOSS OF CONTINUITY IN THE GROUNDING SYSTEM OR DAMAGE TO THE CONDUIT AND PROVIDE TESTING RESULTS.
4. METAL CONDUIT AND TRAY SHALL BE GROUNDED AND MADE ELECTRICALLY CONTINUOUS WITH LISTED BONDING FITTINGS OR BY BONDING ACROSS THE DISCONTINUITY WITH #6 COPPER WIRE UL APPROVED GROUNDING TYPE CONDUIT CLAMPS.
5. METAL RACEWAY SHALL NOT BE USED AS THE NEC REQUIRED EQUIPMENT GROUND CONDUCTOR. STRANDED COPPER CONDUCTORS WITH GREEN INSULATION, SIZED IN ACCORDANCE WITH THE NEC, SHALL BE FURNISHED AND INSTALLED WITH THE POWER CIRCUITS TO BTS EQUIPMENT.

GENERAL NOTES:

- 1. FOR THE PURPOSE OF CONSTRUCTION DRAWING, THE FOLLOWING DEFINITIONS SHALL APPLY: CONTRACTOR: GENERAL CONTRACTOR RESPONSIBLE FOR CONSTRUCTION CARRIER: VERIZON TOWER OWNER: CROWN CASTLE USA INC.
2. THESE DRAWINGS HAVE BEEN PREPARED USING STANDARDS OF PROFESSIONAL CARE AND COMPLETENESS NORMALLY EXERCISED UNDER SIMILAR CIRCUMSTANCES BY REPUTABLE ENGINEERS IN THIS OR SIMILAR LOCALITIES. IT IS ASSUMED THAT THE WORK DEPICTED WILL BE PERFORMED BY AN EXPERIENCED CONTRACTOR AND/OR WORKPEOPLE WHO HAVE A WORKING KNOWLEDGE OF THE APPLICABLE CODE STANDARDS AND REQUIREMENTS AND OF INDUSTRY ACCEPTED STANDARD GOOD PRACTICE.
3. THESE DRAWINGS REPRESENT THE FINISHED STRUCTURE. THEY DO NOT INDICATE THE MEANS OR METHODS OF CONSTRUCTION. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR THE CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, AND PROCEDURES. THE CONTRACTOR SHALL PROVIDE ALL MEASURES NECESSARY FOR PROTECTION OF LIFE AND PROPERTY DURING CONSTRUCTION.
4. NOTES AND DETAILS IN THE CONSTRUCTION DRAWINGS SHALL TAKE PRECEDENCE OVER GENERAL NOTES AND TYPICAL DETAILS. WHERE NO DETAILS ARE SHOWN, CONSTRUCTION SHALL CONFORM TO SIMILAR WORK ON THE PROJECT, AND/OR AS PROVIDED FOR IN THE CONTRACT DOCUMENTS.
5. SUBSTANTIAL EFFORT HAS BEEN MADE TO PROVIDE ACCURATE DIMENSIONS AND MEASUREMENTS ON THE DRAWINGS TO ASSIST IN THE FABRICATION AND/OR PLACEMENT OF CONSTRUCTION ELEMENTS BUT IT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO FIELD VERIFY THE DIMENSIONS, MEASUREMENTS, AND/OR CLEARANCES SHOWN IN THE CONSTRUCTION DRAWINGS PRIOR TO FABRICATION OR CUTTING OF ANY NEW OR EXISTING CONSTRUCTION ELEMENTS.

CONCRETE, FOUNDATIONS, AND REINFORCING STEEL:

- 1. ALL CONCRETE WORK SHALL BE IN ACCORDANCE WITH THE ACI 301, ACI 318, ACI 336, ASTM A184, ASTM A185 AND THE DESIGN AND CONSTRUCTION SPECIFICATION FOR CAST-IN-PLACE CONCRETE.
2. UNLESS NOTED OTHERWISE, SOIL BEARING PRESSURE USED FOR DESIGN OF SLABS AND FOUNDATIONS IS ASSUMED TO BE 1000 psf.
3. ALL CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH (f'c) OF 3000 psi AT 28 DAYS, UNLESS NOTED OTHERWISE. NO MORE THAN 90 MINUTES SHALL ELAPSE FROM BATCH TIME TO TIME OF PLACEMENT UNLESS APPROVED BY THE ENGINEER OF RECORD. TEMPERATURE OF CONCRETE SHALL NOT EXCEED 90°F AT TIME OF PLACEMENT.
4. CONCRETE EXPOSED TO FREEZE-THAW CYCLES SHALL CONTAIN AIR ENTRAINING ADMIXTURES. AMOUNT OF AIR ENTRAINMENT TO BE BASED ON SIZE OF AGGREGATE AND F3 CLASS EXPOSURE (VERY SEVERE). CEMENT USED TO BE TYPE II PORTLAND CEMENT WITH A MAXIMUM WATER-TO-CEMENT RATIO (W/C) OF 0.45.
5. ALL STEEL REINFORCING SHALL CONFORM TO ASTM A615. ALL WELDED WIRE FABRIC (WWF) SHALL CONFORM TO ASTM A185. ALL SPLICES SHALL BE CLASS "B" TENSION SPLICES, UNLESS NOTED OTHERWISE. ALL HOOKS SHALL BE STANDARD 90 DEGREE HOOKS, UNLESS NOTED OTHERWISE. YIELD STRENGTH (Fy) OF STANDARD DEFORMED BARS ARE AS FOLLOWS: #4 BARS AND SMALLER.....40 ksi #5 BARS AND LARGER.....60 ksi

ELECTRICAL INSTALLATION NOTES:

- 1. ALL ELECTRICAL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS, NEC AND ALL APPLICABLE FEDERAL, STATE, AND LOCAL CODES/ORDINANCES.
2. CONDUIT ROUTINGS ARE SCHEMATIC. CONTRACTOR SHALL INSTALL CONDUITS SO THAT ACCESS TO EQUIPMENT IS NOT BLOCKED AND TRIP HAZARDS ARE ELIMINATED.
3. WIRING, RACEWAY AND SUPPORT METHODS AND MATERIALS SHALL COMPLY WITH THE REQUIREMENTS OF THE NEC.
4. ALL CIRCUITS SHALL BE SEGREGATED AND MAINTAIN MINIMUM CABLE SEPARATION AS REQUIRED BY THE NEC.
4.1. ALL EQUIPMENT SHALL BEAR THE UNDERWRITERS LABORATORIES LABEL OF APPROVAL, AND SHALL CONFORM TO REQUIREMENT OF THE NATIONAL ELECTRICAL CODE.
4.2. ALL OVERCURRENT DEVICES SHALL HAVE AN INTERRUPTING CURRENT RATING THAT SHALL BE GREATER THAN THE SHORT CIRCUIT CURRENT TO WHICH THEY ARE SUBJECTED, 22,000 AIC MINIMUM. VERIFY AVAILABLE SHORT CIRCUIT CURRENT DOES NOT EXCEED THE RATING OF ELECTRICAL EQUIPMENT IN ACCORDANCE WITH ARTICLE 110.24 NEC OR THE MOST CURRENT ADOPTED CODE PRE THE GOVERNING JURISDICTION.
5. EACH END OF EVERY POWER PHASE CONDUCTOR, GROUNDING CONDUCTOR, AND TELCO CONDUCTOR OR CABLE SHALL BE LABELED WITH COLOR-CODED INSULATION OR ELECTRICAL TAPE (3M BRAND, 1/2" PLASTIC ELECTRICAL TAPE WITH UV PROTECTION, OR EQUAL). THE IDENTIFICATION METHOD SHALL CONFORM WITH NEC AND OSHA.
6. ALL ELECTRICAL COMPONENTS SHALL BE CLEARLY LABELED WITH LAMICOID TAGS SHOWING THEIR RATED VOLTAGE, PHASE CONFIGURATION, WIRE CONFIGURATION, POWER OR AMPACITY RATING AND BRANCH CIRCUIT ID NUMBERS (I.E. PANEL BOARD AND CIRCUIT ID'S).
7. PANEL BOARDS (ID NUMBERS) SHALL BE CLEARLY LABELED WITH PLASTIC LABELS.
8. ALL TIE WRAPS SHALL BE CUT FLUSH WITH APPROVED CUTTING TOOL TO REMOVE SHARP EDGES.
9. ALL POWER AND EQUIPMENT GROUND WIRING IN TUBING OR CONDUIT SHALL BE SINGLE COPPER CONDUCTOR (#14 OR LARGER) WITH TYPE THW, THN, THWN-2, XHHW, XHHW-2, THW, THW-2, RHW, OR RHW-2 INSULATION UNLESS OTHERWISE SPECIFIED.

Table with 3 columns: SYSTEM, CONDUCTOR, COLOR. Rows include 120/240V, 10; 120/208V, 30; 277/480V, 30; and DC VOLTAGE.

APWA UNIFORM COLOR CODE:

- WHITE PROPOSED EXCAVATION
PINK TEMPORARY SURVEY MARKINGS
RED ELECTRIC POWER LINES, CABLES, CONDUIT, AND LIGHTING CABLES
YELLOW GAS, OIL, STEAM, PETROLEUM, OR GASEOUS MATERIALS
ORANGE COMMUNICATION, ALARM OR SIGNAL LINES, CABLES, OR CONDUIT AND TRAFFIC LOOPS
BLUE POTABLE WATER
PURPLE RECLAIMED WATER, IRRIGATION, AND SLURRY LINES
GREEN SEWERS AND DRAIN LINES

ABBREVIATIONS:

- ANT ANTENNA
(E) EXISTING
FIF FACILITY INTERFACE FRAME
GEN GENERATOR
GPS GLOBAL POSITIONING SYSTEM
GSM GLOBAL SYSTEM FOR MOBILE
LTE LONG TERM EVOLUTION
MGB MASTER GROUND BAR
MW MICROWAVE
(N) NEW
NEC NATIONAL ELECTRIC CODE
(P) PROPOSED
PP POWER PLANT
QTY QUANTITY
RECT RECTIFIER
RBS RADIO BASE STATION
RETS REMOTE ELECTRIC TILT
RFDS RADIO FREQUENCY DATA SHEET
RRH REMOTE RADIO HEAD
RRU REMOTE RADIO UNIT
SIAD SMART INTEGRATED DEVICE
TMA TOWER MOUNTED AMPLIFIER
TYP TYPICAL
UMTS UNIVERSAL MOBILE TELECOMMUNICATIONS SYSTEM
W.P. WORK POINT

verizon logo and address: 180 WASHINGTON VALLEY ROAD, BEDMINSTER, NJ 07921

CROWN CASTLE logo and address: 1200 MACARTHUR BLVD, SUITE 200, MAHWAH, NJ 07430

B+T GRP logo and address: 1717 S. BOULDER SUITE 300, TULSA, OK 74119, PH: (918) 587-4630, www.btgrp.com

VERIZON SITE NUMBER: 467373
BU #: 806359
NHV 104 943122
423 ORONOQUE RD
MILFORD, CT 06460
EXISTING 100'-0" MONOPOLE

Table with 5 columns: REV, DATE, DRWN, DESCRIPTION, DES./QA. Row 1: 0, 4/26/22, DAS, CONSTRUCTION, MTJ

ISSUED FOR:

Table with 5 columns: REV, DATE, DRWN, DESCRIPTION, DES./QA. Row 1: 0, 4/26/22, DAS, CONSTRUCTION, MTJ

Professional Engineer seal for B&T Engineering, Inc., No. 23924, License Expires 2/10/23

B&T ENGINEERING, INC. PEC.0001564 Expires 2/10/23 IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SHEET NUMBER: T-2 REVISION: 0



**verizon**

180 WASHINGTON VALLEY ROAD  
BEDMINSTER, NJ 07921

**CROWN  
CASTLE**

1200 MACARTHUR BLVD, SUITE 200  
MAHWAH, NJ 07430



1717 S. BOULDER  
SUITE 300  
TULSA, OK 74119  
PH: (918) 587-4630  
www.btgrp.com

VERIZON SITE NUMBER:  
**467373**

BU #: **806359**  
NHV **104 943122**

423 ORONOQUE RD  
MILFORD, CT 06460

EXISTING 100'-0" MONOPOLE

**ISSUED FOR:**

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	4/26/22	DAS	CONSTRUCTION	MTJ




B&T ENGINEERING, INC.  
PEC.0001564  
Expires 2/10/23

IT IS A VIOLATION OF LAW FOR ANY PERSON,  
UNLESS THEY ARE ACTING UNDER THE DIRECTION  
OF A LICENSED PROFESSIONAL ENGINEER,  
TO ALTER THIS DOCUMENT.


SHEET NUMBER: REVISION:

**C-1**

**0**

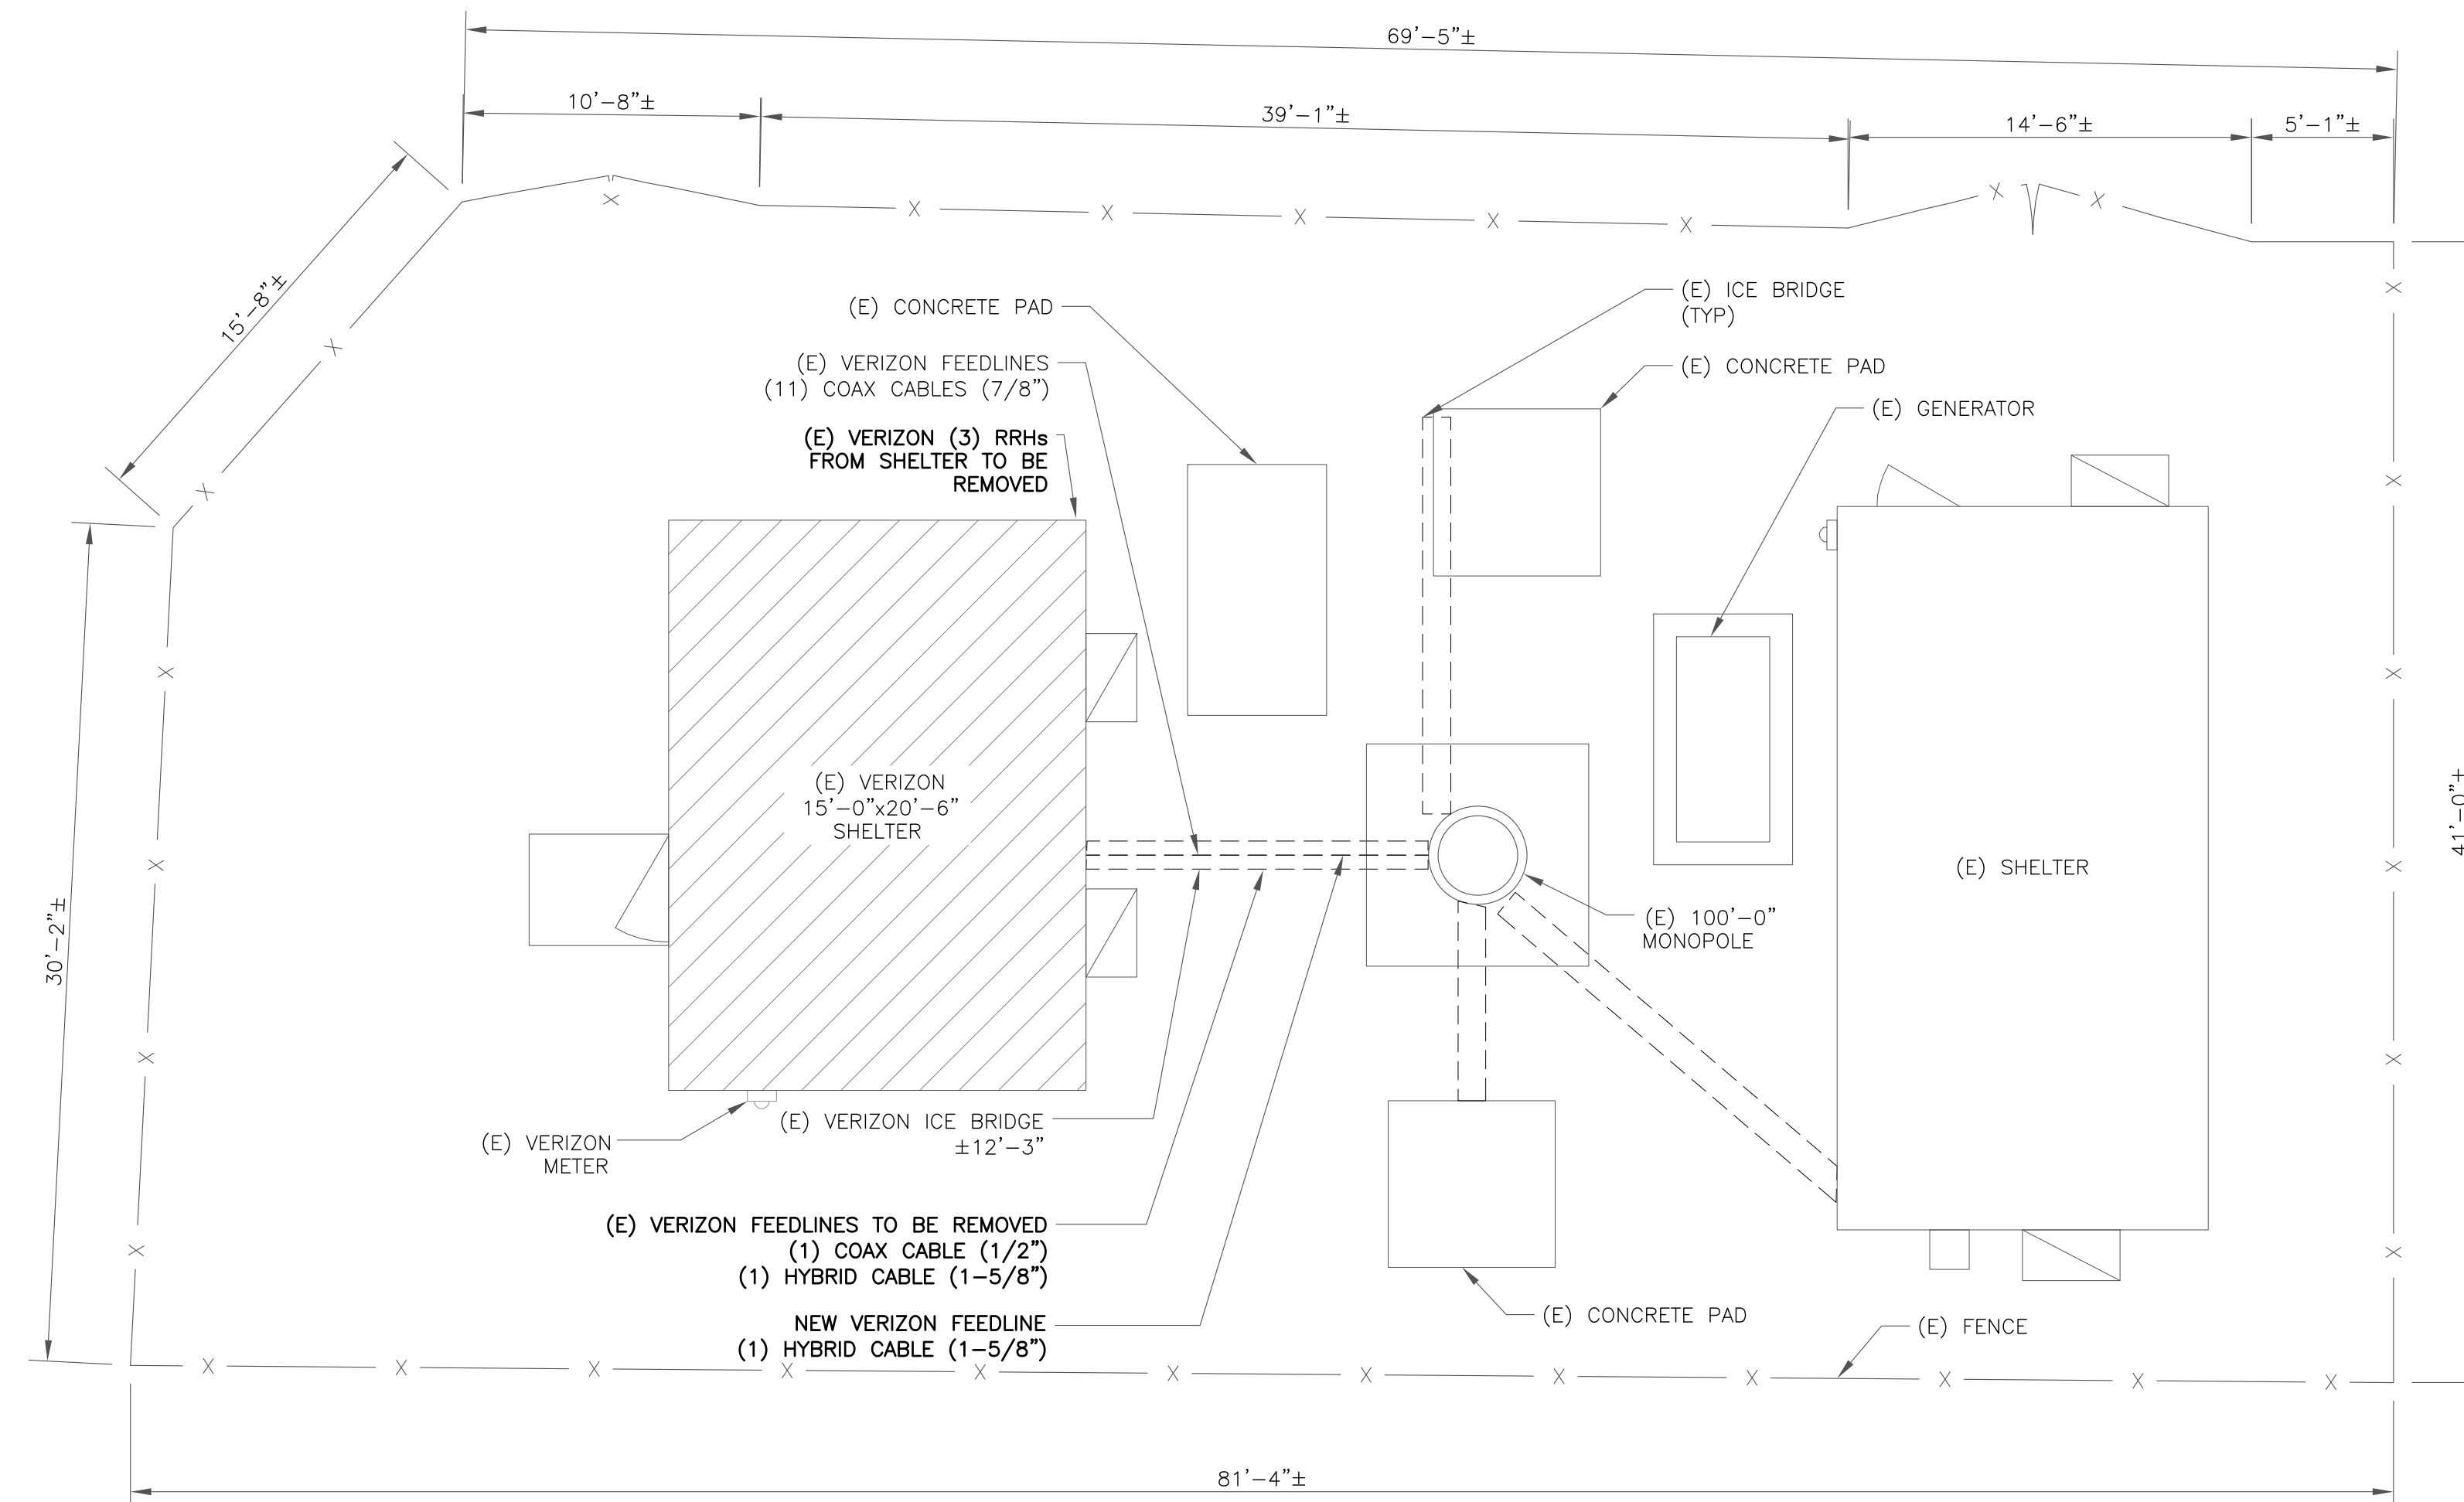

1 SITE PLAN  
SCALE: 3/16"=1'-0" (FULL SIZE)  
3/32"=1'-0" (11x17)






(E) VERIZON EQUIPMENT TO REMAIN  
 (6) DECIBEL - DBB46F65ZAX7 ANTENNAS  
 INSTALLED ON EXISTING MOUNTS

NEW VERIZON EQUIPMENT  
 (3) SAMSUNG - MT6407-77A ANTENNAS  
 (6) JMA - MX06FR0660-03 ANTENNAS  
 (1) RAYCAP - RVZDC-6627-PF-48 OVP  
 (3) SAMSUNG - RFV01U-D2A RRHS  
 (3) SAMSUNG - RFV01U-D1A RRHS  
 INSTALLED ON EXISTING MOUNTS

VERIZON EQUIPMENT  
 ANTENNA CL: 105'-0"  
 MOUNT CL: 100'-0"

1 TOWER ELEVATION  
 SCALE: NOT TO SCALE

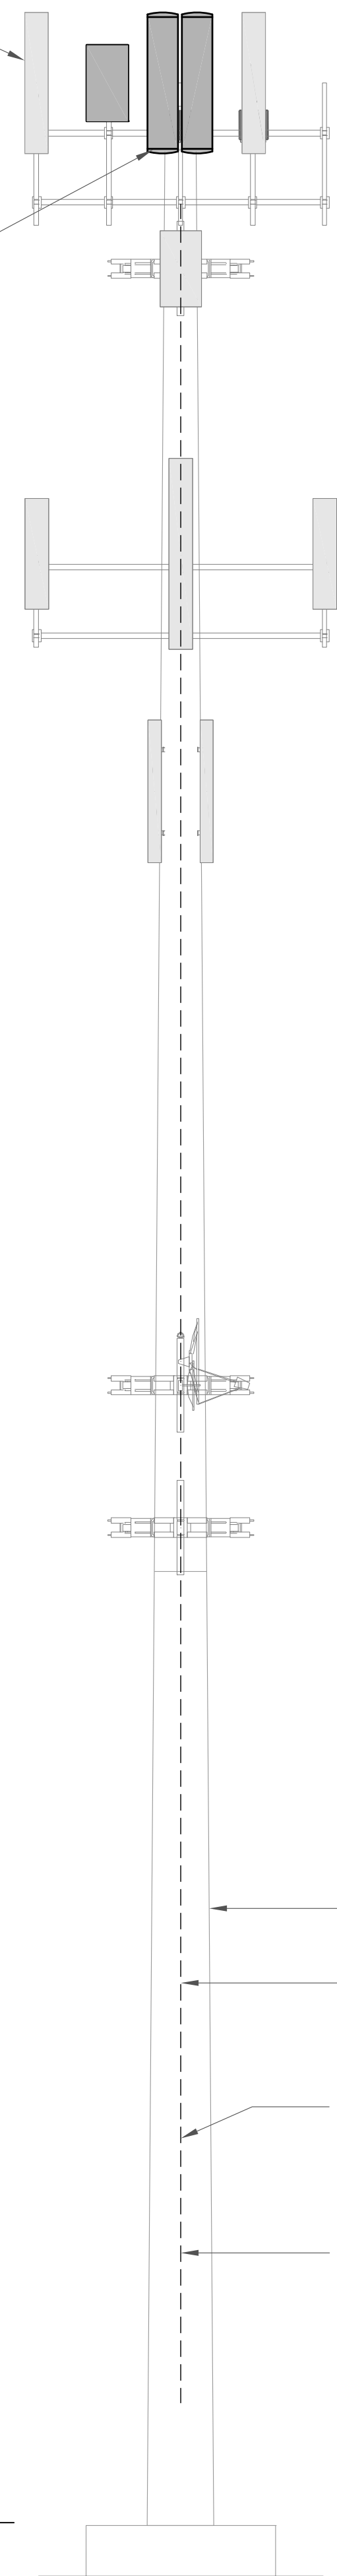

TIP OF ANTENNA  
 ELEV. = 108'-0"  
 VERIZON WIRELESS ACL  
 ELEV. = 105'-0"  
 TOP OF MONOPOLE TOWER  
 ELEV. = 102'-2"  
 VERIZON WIRELESS MCL  
 ELEV. = 100'-0"  
 ANTENNA MCL (BY OTHERS)  
 ELEV. = 97'-2"

ANTENNA MCL (BY OTHERS)  
 ELEV. = 82'-2"

ANTENNA MCL (BY OTHERS)  
 ELEV. = 75'-2"

ANTENNA MCL (BY OTHERS)  
 ELEV. = 50'-2"


ANTENNA MCL (BY OTHERS)  
 ELEV. = 44'-2"

(E) 100'-0" MONOPOLE  
 (E) VERIZON FEEDLINES  
 (11) COAX CABLES (7/8")  
 (E) VERIZON FEEDLINES TO BE REMOVED  
 (1) COAX CABLE (1/2")  
 (1) HYBRID CABLE (1-5/8")  
 NEW VERIZON FEEDLINE  
 (1) HYBRID CABLE (1-5/8")

TOP OF FOUNDATION  
 ELEV. = 2'-2"


INSTALLER NOTE:  
 NO PROPOSED LOADING TO BE ADDED  
 UNTIL TOWER MODIFICATIONS ARE  
 INSTALLED PER MOUNT MODIFICATION  
 DRAWINGS BY MASER CONSULTING  
 CONNECTICUT DATED 1/24/22.

2 EXISTING ANTENNA PLAN  
 SCALE: NOT TO SCALE

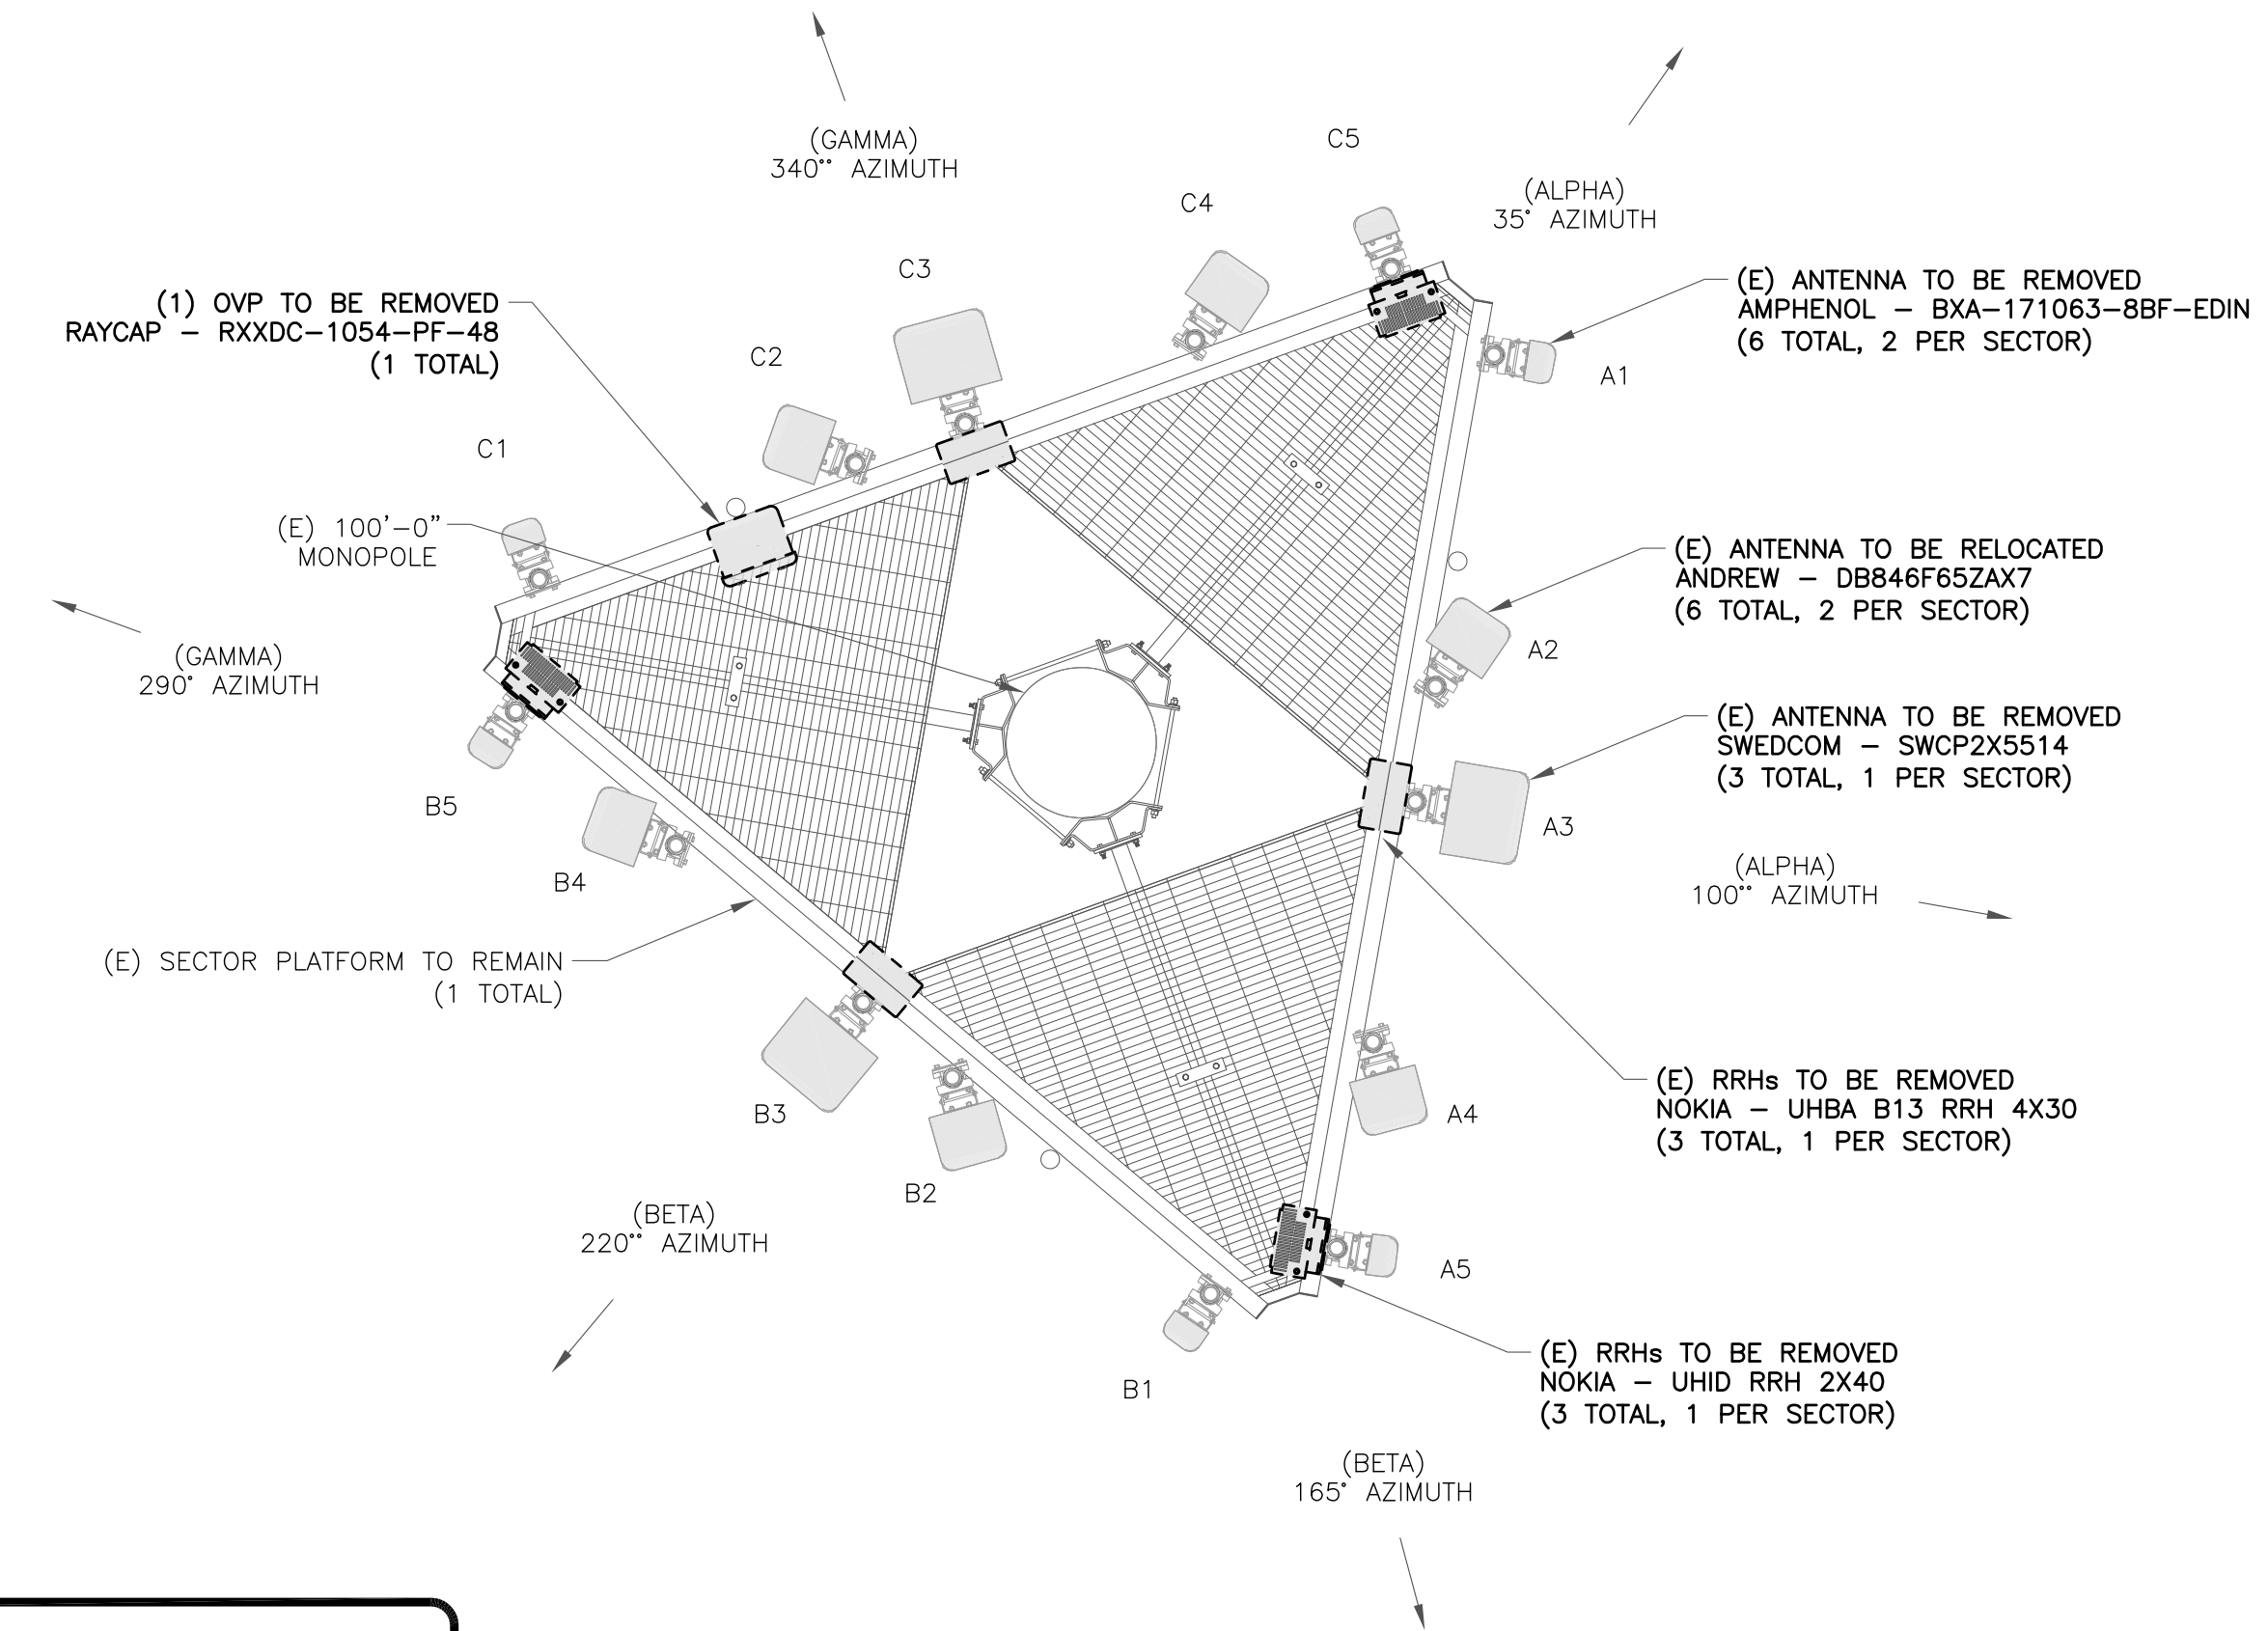

INSTALLER NOTE:  
 NO PROPOSED LOADING TO BE ADDED  
 UNTIL TOWER MODIFICATIONS ARE  
 INSTALLED PER MOUNT MODIFICATION  
 DRAWINGS BY MASER CONSULTING  
 CONNECTICUT DATED 1/24/22.

3 NEW ANTENNA PLAN  
 SCALE: NOT TO SCALE

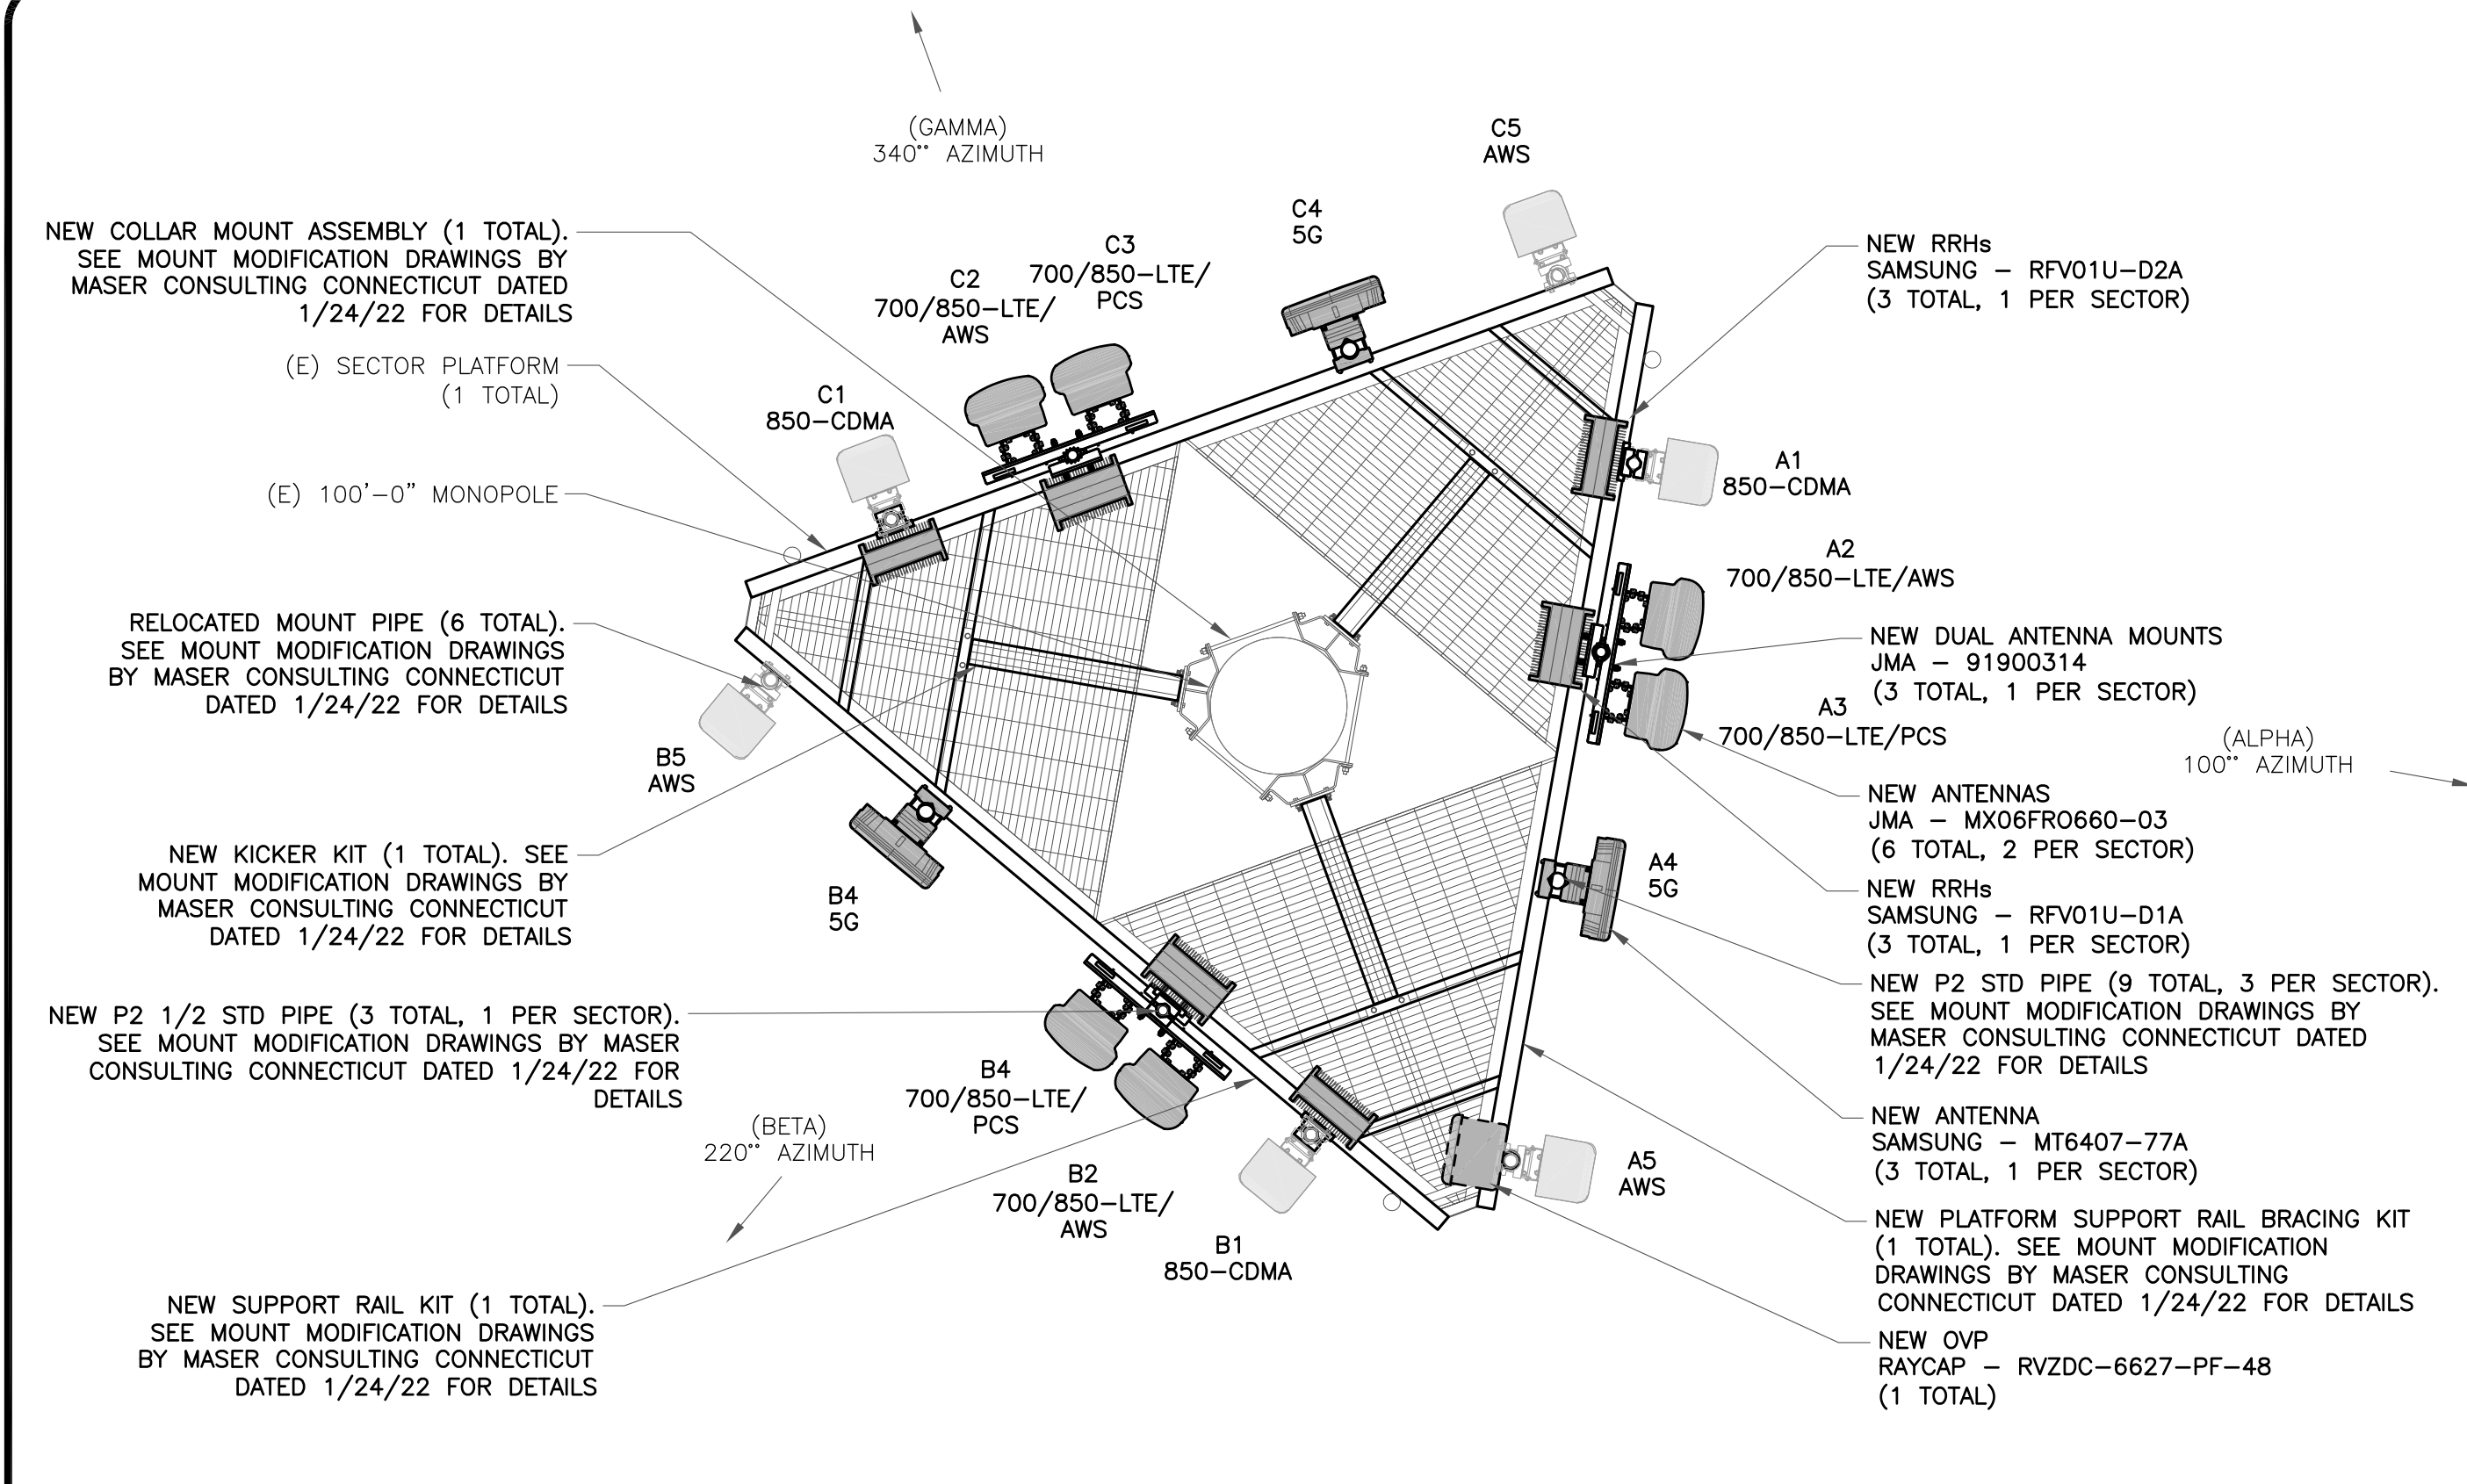

INSTALLER NOTE:  
 NO PROPOSED LOADING TO BE ADDED  
 UNTIL TOWER MODIFICATIONS ARE  
 INSTALLED PER MOUNT MODIFICATION  
 DRAWINGS BY MASER CONSULTING  
 CONNECTICUT DATED 1/24/22.

**verizon**  
 180 WASHINGTON VALLEY ROAD  
 BEDMINSTER, NJ 07921

**CROWN CASTLE**  
 1200 MACARTHUR BLVD, SUITE 200  
 MAHWAH, NJ 07430

**B+T GRP**  
 1717 S. BOULDER  
 SUITE 300  
 TULSA, OK 74119  
 PH: (918) 587-4630  
 www.btgrp.com

VERIZON SITE NUMBER:  
**467373**  
 BU #: **806359**  
 NHV 104 943122  
 423 ORONOQUE RD  
 MILFORD, CT 06460  
 EXISTING 100'-0" MONOPOLE

ISSUED FOR:

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	4/26/22	DAS	CONSTRUCTION	MTJ

B&T ENGINEERING, INC.  
 PEC.0001564  
 Expires 2/10/23  
 IT IS A VIOLATION OF LAW FOR ANY PERSON,  
 UNLESS THEY ARE ACTING UNDER THE DIRECTION  
 OF A LICENSED PROFESSIONAL ENGINEER,  
 TO ALTER THIS DOCUMENT.

SHEET NUMBER: **C-2**  
 REVISION: **0**



VERIZON SITE NUMBER:  
**467373**

BU #: **806359**  
 NHV **104 943122**

423 ORONOQUE RD  
 MILFORD, CT 06460

EXISTING 100'-0" MONOPOLE

**ISSUED FOR:**

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	4/26/22	DAS	CONSTRUCTION	MTJ



B&T ENGINEERING, INC.  
 PEC.0001564  
 Expires 2/10/23

IT IS A VIOLATION OF LAW FOR ANY PERSON,  
 UNLESS THEY ARE ACTING UNDER THE DIRECTION  
 OF A LICENSED PROFESSIONAL ENGINEER,  
 TO ALTER THIS DOCUMENT.

SHEET NUMBER: **C-3** REVISION: **0**


ANTENNA/RRH SCHEDULE

SECTOR	STATUS	ANTENNA MANUFACTURER	ANTENNA MODEL	ANTENNA CENTERLINE	AZIMUTH	MECHANICAL DOWNTILTS	ELECTRICAL DOWNTILTS	TOWER EQUIPMENT MANUFACTURER	TOWER EQUIPMENT QTY/MODEL
A1	EXISTING	ANDREW	DB846F65ZAX7	105'-0"	100°	6'	0'	-	-
A2	NEW	JMA	MX06FRO660-03	105'-0"	100°	0'	*/*/*/2'/2'	SAMSUNG SAMSUNG	(1) RFV01U-D1A (1) RFV01U-D2A
A3	NEW	JMA	MX06FRO660-03	105'-0"	100°	0'	*/*/*/2'/2'		
A4	NEW	SAMSUNG	MT6407-77A	105'-0"	100°	0'	6'	-	-
A5	EXISTING	ANDREW	DB846F65ZAX7	105'-0"	100°	6'	0'	-	-
B1	EXISTING	ANDREW	DB846F65ZAX7	105'-0"	220°	6'	0'	-	-
B2	NEW	JMA	MX06FRO660-03	105'-0"	220°	0'		SAMSUNG SAMSUNG	(1) RFV01U-D1A (1) RFV01U-D2A
B3	NEW	JMA	MX06FRO660-03	105'-0"	220°	0'			
B4	NEW	SAMSUNG	MT6407-77A	105'-0"	220°	0'	6'	-	-
B5	EXISTING	ANDREW	DB846F65ZAX7	105'-0"	220°	6'	0'	-	-
C1	EXISTING	ANDREW	DB846F65ZAX7	105'-0"	340°	6'	0'	-	-
C2	NEW	JMA	MX06FRO660-03	105'-0"	340°	0'		SAMSUNG SAMSUNG	(1) RFV01U-D1A (1) RFV01U-D2A
C3	NEW	JMA	MX06FRO660-03	105'-0"	340°	0'			
C4	NEW	SAMSUNG	MT6407-77A	105'-0"	340°	0'	6'	-	-
C5	EXISTING	ANDREW	DB846F65ZAX7	105'-0"	340°	6'	0'	-	-

1 VERIZON TOWER EQUIPMENT SCHEDULE  
 SCALE: NOT TO SCALE

CABLE SCHEDULE

STATUS	CABLE TYPE	SIZE	LENGTH	QTY
-	-	-	-	-
EXISTING	COAX	7/8"	155'-0"±	11
-	-	-	-	-
NEW	HYBRID	1-5/8"	155'-0"±	1
TOTAL CABLE QTY:				12

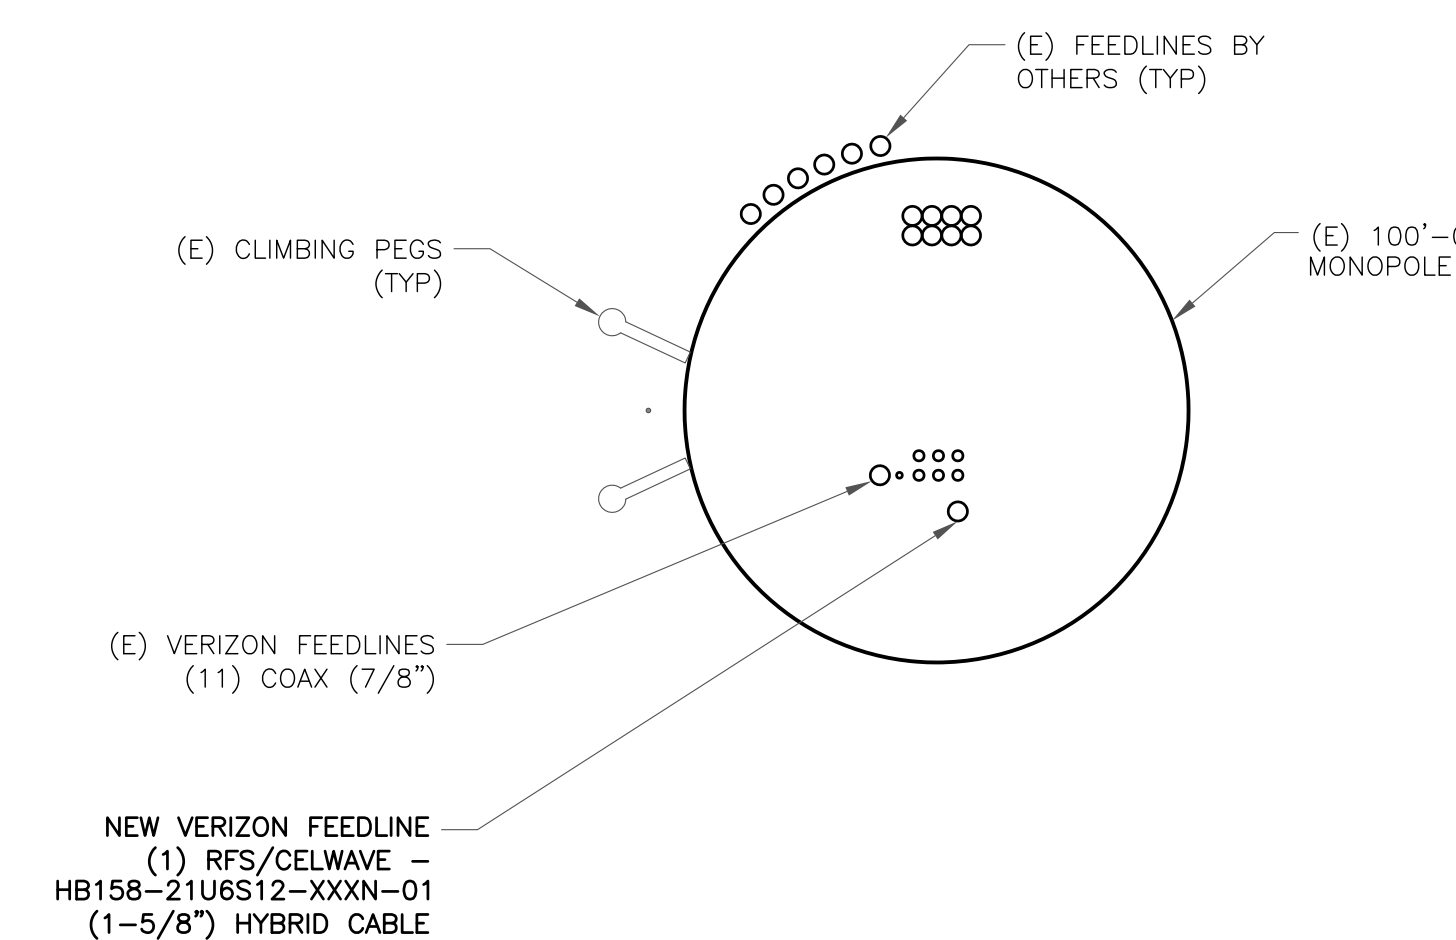

2 BASE LEVEL DETAIL  
 SCALE: NOT TO SCALE



**verizon**<sup>v</sup>  
 180 WASHINGTON VALLEY ROAD  
 BEDMINSTER, NJ 07921

**CROWN CASTLE**  
 1200 MACARTHUR BLVD, SUITE 200  
 MAHWAH, NJ 07430

**B+T GRP**  
 1717 S. BOULDER  
 SUITE 300  
 TULSA, OK 74119  
 PH: (918) 587-4630  
 www.btgrp.com

VERIZON SITE NUMBER:  
**467373**

BU #: **806359**  
 NHV 104 943122

423 ORONOQUE RD  
 MILFORD, CT 06460

EXISTING 100'-0" MONOPOLE

**ISSUED FOR:**

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	4/26/22	DAS	CONSTRUCTION	MTJ




B&T ENGINEERING, INC.  
 PEC.0001564  
 Expires 2/10/23

IT IS A VIOLATION OF LAW FOR ANY PERSON,  
 UNLESS THEY ARE ACTING UNDER THE DIRECTION  
 OF A LICENSED PROFESSIONAL ENGINEER,  
 TO ALTER THIS DOCUMENT.


SHEET NUMBER: **C-4** REVISION: **0**

1 NOT USED  
 SCALE: NOT TO SCALE

2 NOT USED  
 SCALE: NOT TO SCALE


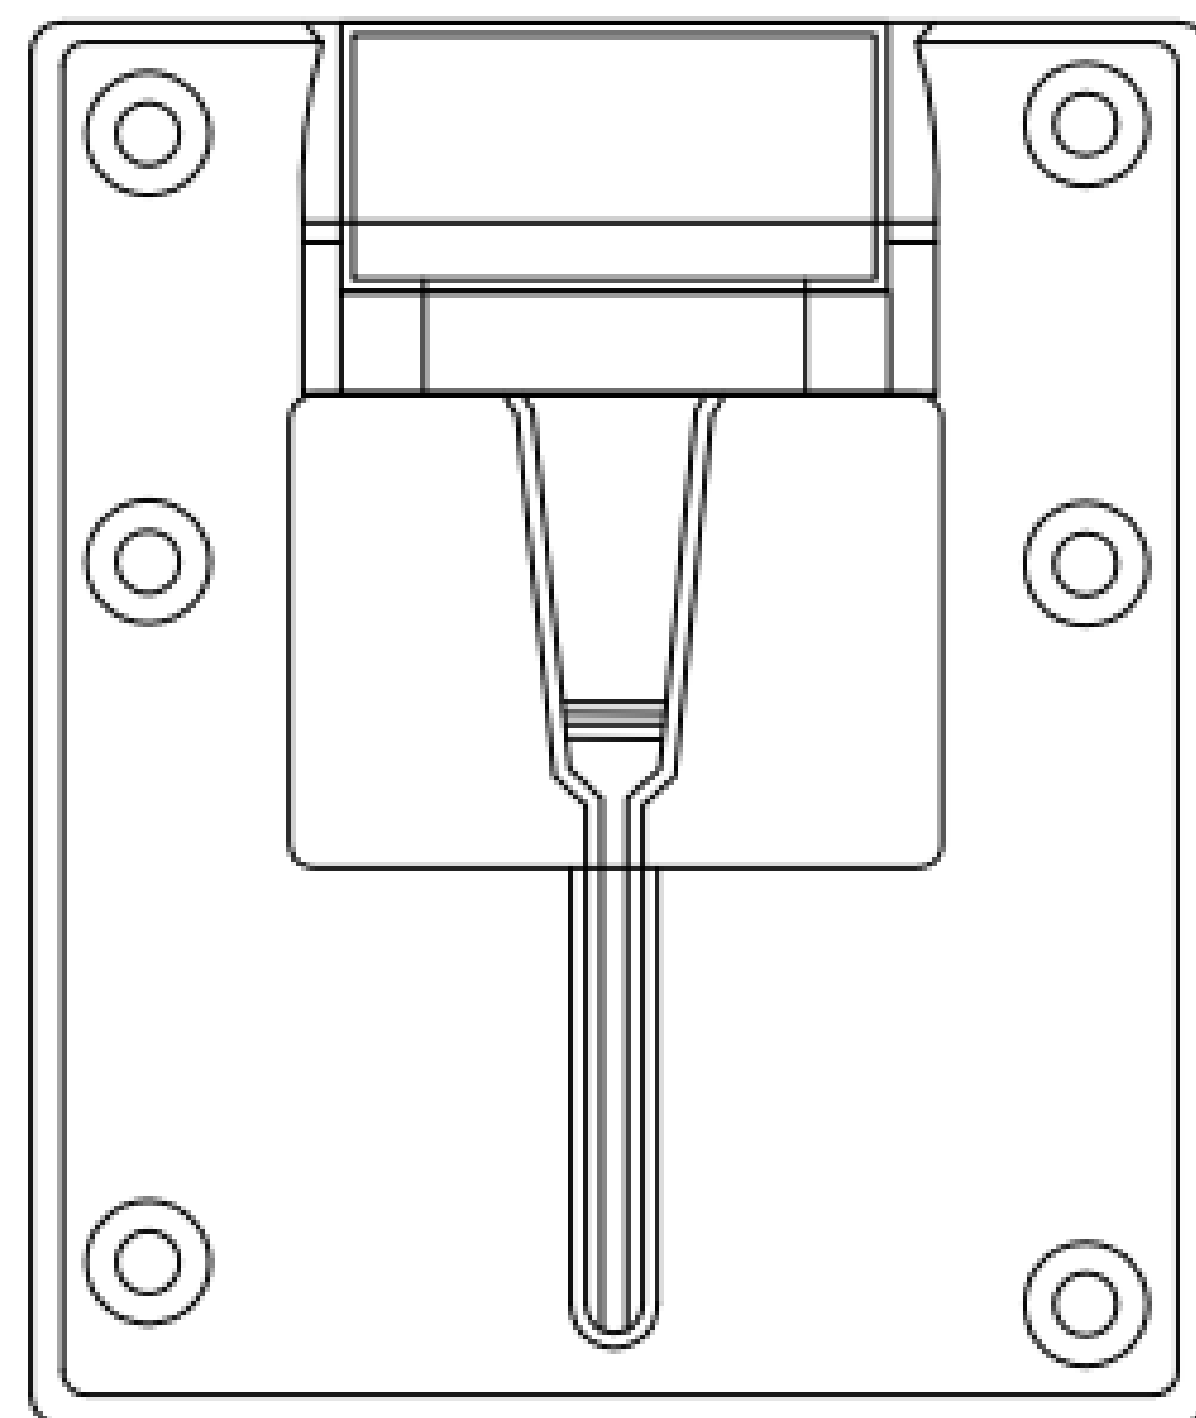


3 SAMSUNG – EP97–01585A BRACKET DETAIL  
 SCALE: NOT TO SCALE

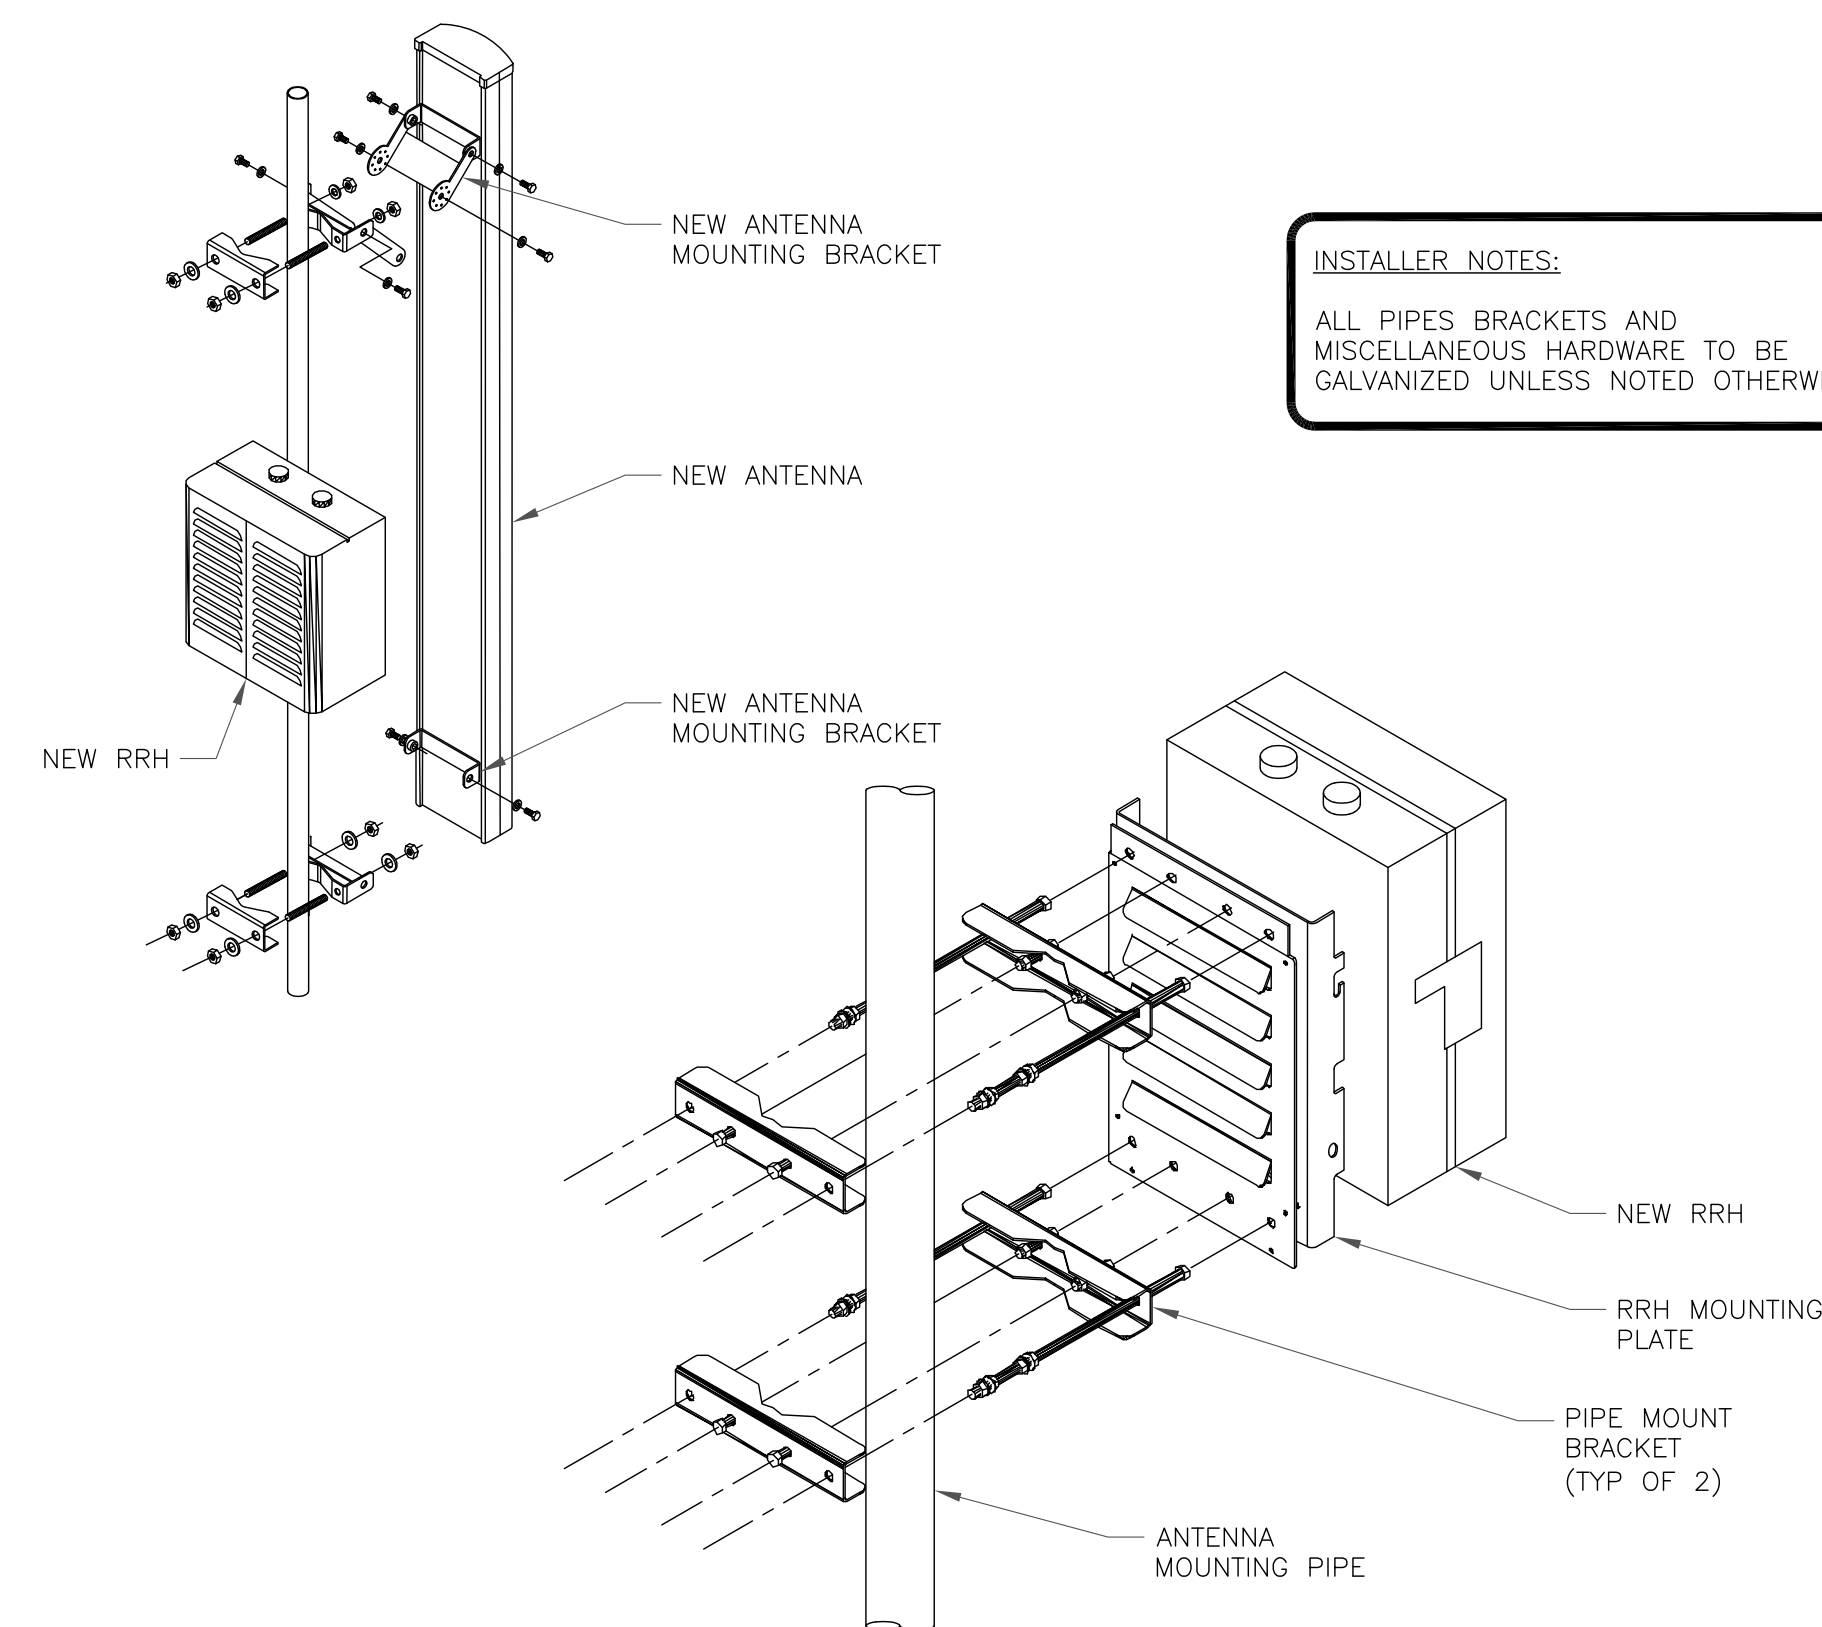

4 ANTENNA & RRH MOUNTING DETAIL  
 SCALE: NOT TO SCALE

MANUFACTURER	SAMSUNG
MODEL	MT6407-77A
SIZE	35.06" x 16.06" x 5.51"
WEIGHT	81.57 LBS

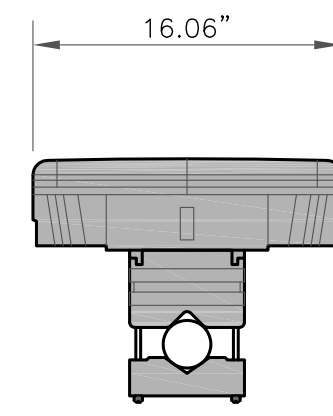
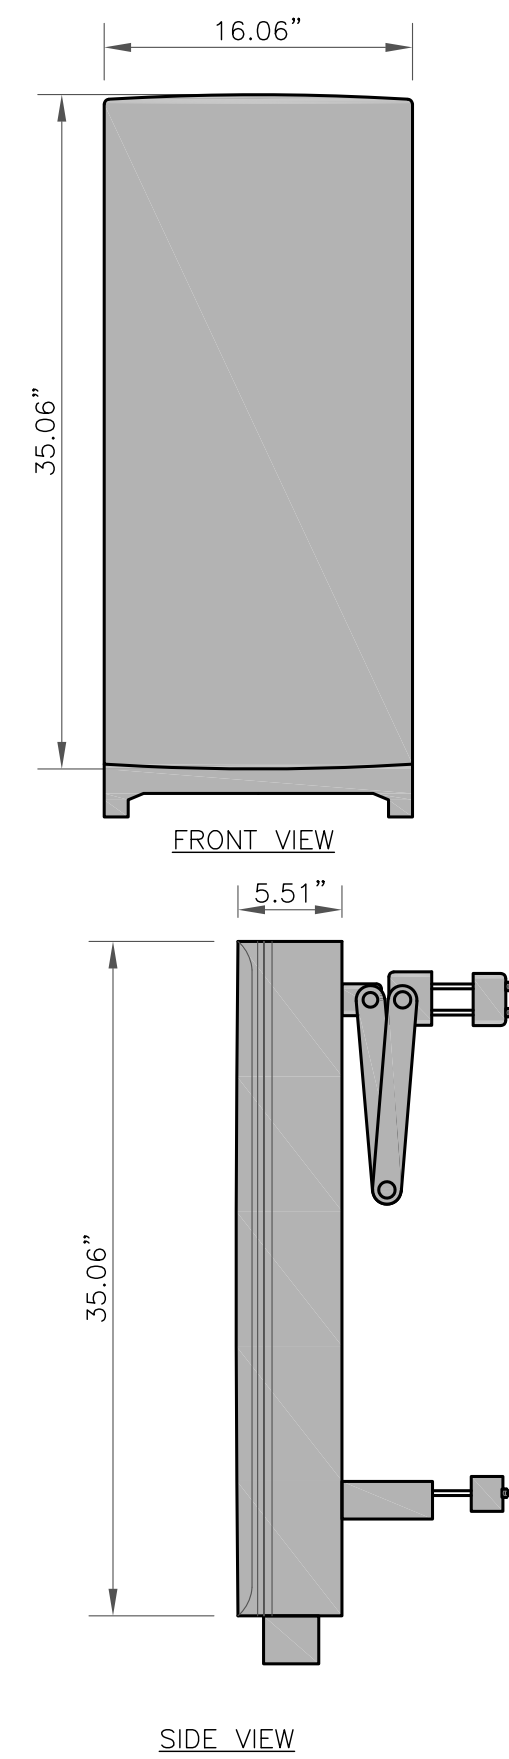


PLAN VIEW

SIDE VIEW

1 SAMSUNG - MT6407-77A  
SCALE: NOT TO SCALE

MANUFACTURER	JMA
MODEL	MX06FRO660-03
SIZE	71.30" x 15.40" x 10.70"
WEIGHT	60 LBS

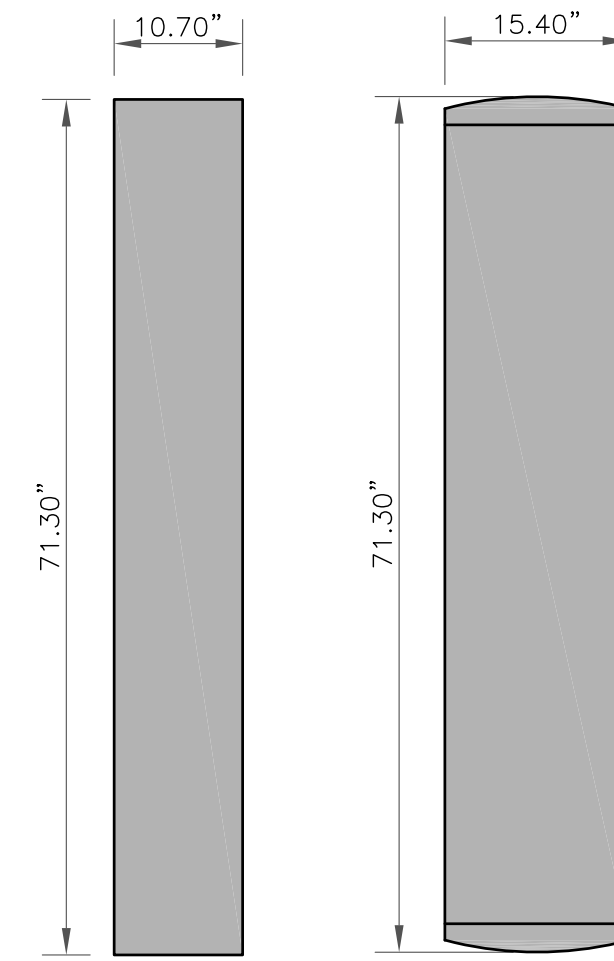


PLAN VIEW

SIDE VIEW


FRONT VIEW

2 JMA - MX06FRO660-03  
SCALE: NOT TO SCALE


MANUFACTURER	RAYCAP
MODEL	RVZDC-6627-PF-48
SIZE	28.93" x 15.73" x 10.31"
WEIGHT	32.00 LBS

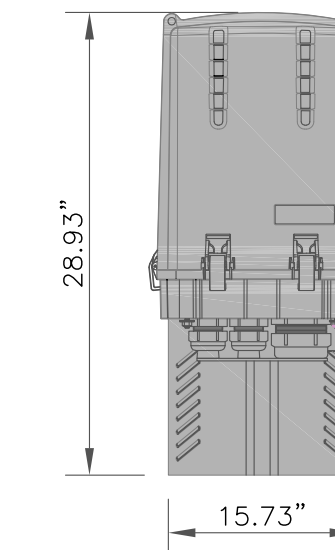

FRONT VIEW

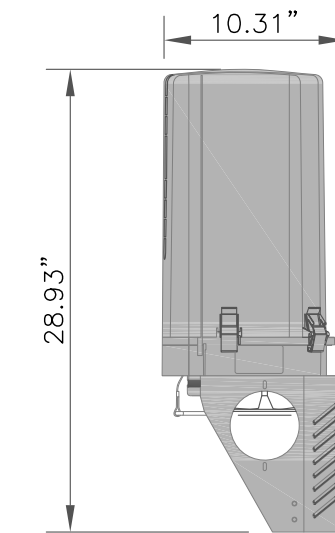


SIDE VIEW




PLAN VIEW

3 RAYCAP - RVZDC-6627-PF-48  
SCALE: NOT TO SCALE


MANUFACTURER	SAMSUNG
MODEL	B2/B66A RRH-BRO49 (RFV01U-D1A)
SIZE	15" x 15" x 10"
WEIGHT	84.4 LBS



FRONT VIEW

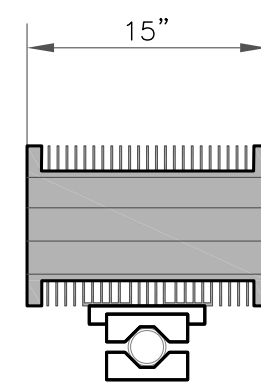


PLAN VIEW

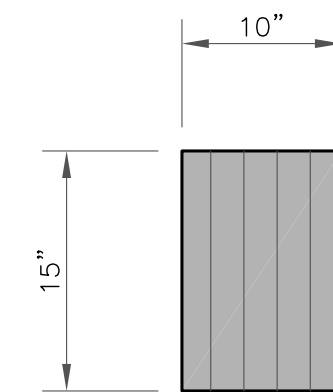


SIDE VIEW

4 SAMSUNG - B2/B66A RRH-BRO49 (RFV01U-D1A)  
SCALE: NOT TO SCALE


MANUFACTURER	SAMSUNG
MODEL	B5/B13 RRH-BRO4C (RFV01U-D2A)
SIZE	15" x 15" x 8.1"
WEIGHT	70.3 LBS



FRONT VIEW

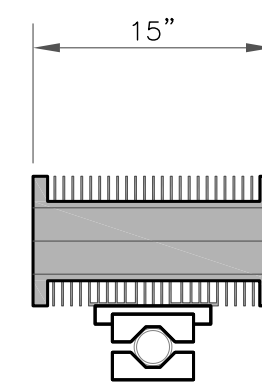

PLAN VIEW

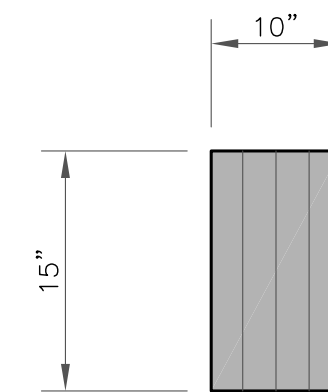

SIDE VIEW

5 SAMSUNG - B5/B13 RRH-BRO4C (RFV01U-D2A)  
SCALE: NOT TO SCALE

6 NOT USED  
SCALE: NOT TO SCALE

**verizon**  
180 WASHINGTON VALLEY ROAD  
BEDMINSTER, NJ 07921

**CROWN CASTLE**  
1200 MACARTHUR BLVD, SUITE 200  
MAHWAH, NJ 07430

**B+T GRP**  
1717 S. BOULDER  
SUITE 300  
TULSA, OK 74119  
PH: (918) 587-4630  
www.btgrp.com

VERIZON SITE NUMBER:  
467373

BU #: 806359  
NHV 104 943122

423 ORONOQUE RD  
MILFORD, CT 06460

EXISTING 100'-0" MONOPOLE

ISSUED FOR:

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	4/26/22	DAS	CONSTRUCTION	MTJ



B&T ENGINEERING, INC.  
PEC.0001564  
Expires 2/10/23

IT IS A VIOLATION OF LAW FOR ANY PERSON,  
UNLESS THEY ARE ACTING UNDER THE DIRECTION  
OF A LICENSED PROFESSIONAL ENGINEER,  
TO ALTER THIS DOCUMENT.

SHEET NUMBER:

C-5




REVISION:

0





- Port 1 & 2 are for low band (990-990 MHz).
- Port 3,4,5, & 6 are for high band (1695-2060 MHz).
- Smart Bias Tee (SBT) is through port 1 & 2 for low band and port 3 for high band.
- AISG cable is only needed when drawn in the diagrams below, if it is not drawn then SBT is enough to control all RET motors.
- Not all SBT ports are needed to control RET, only green port connection to green port will control RET.

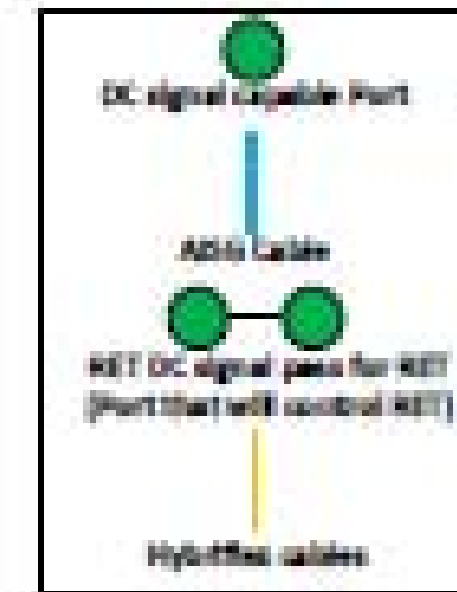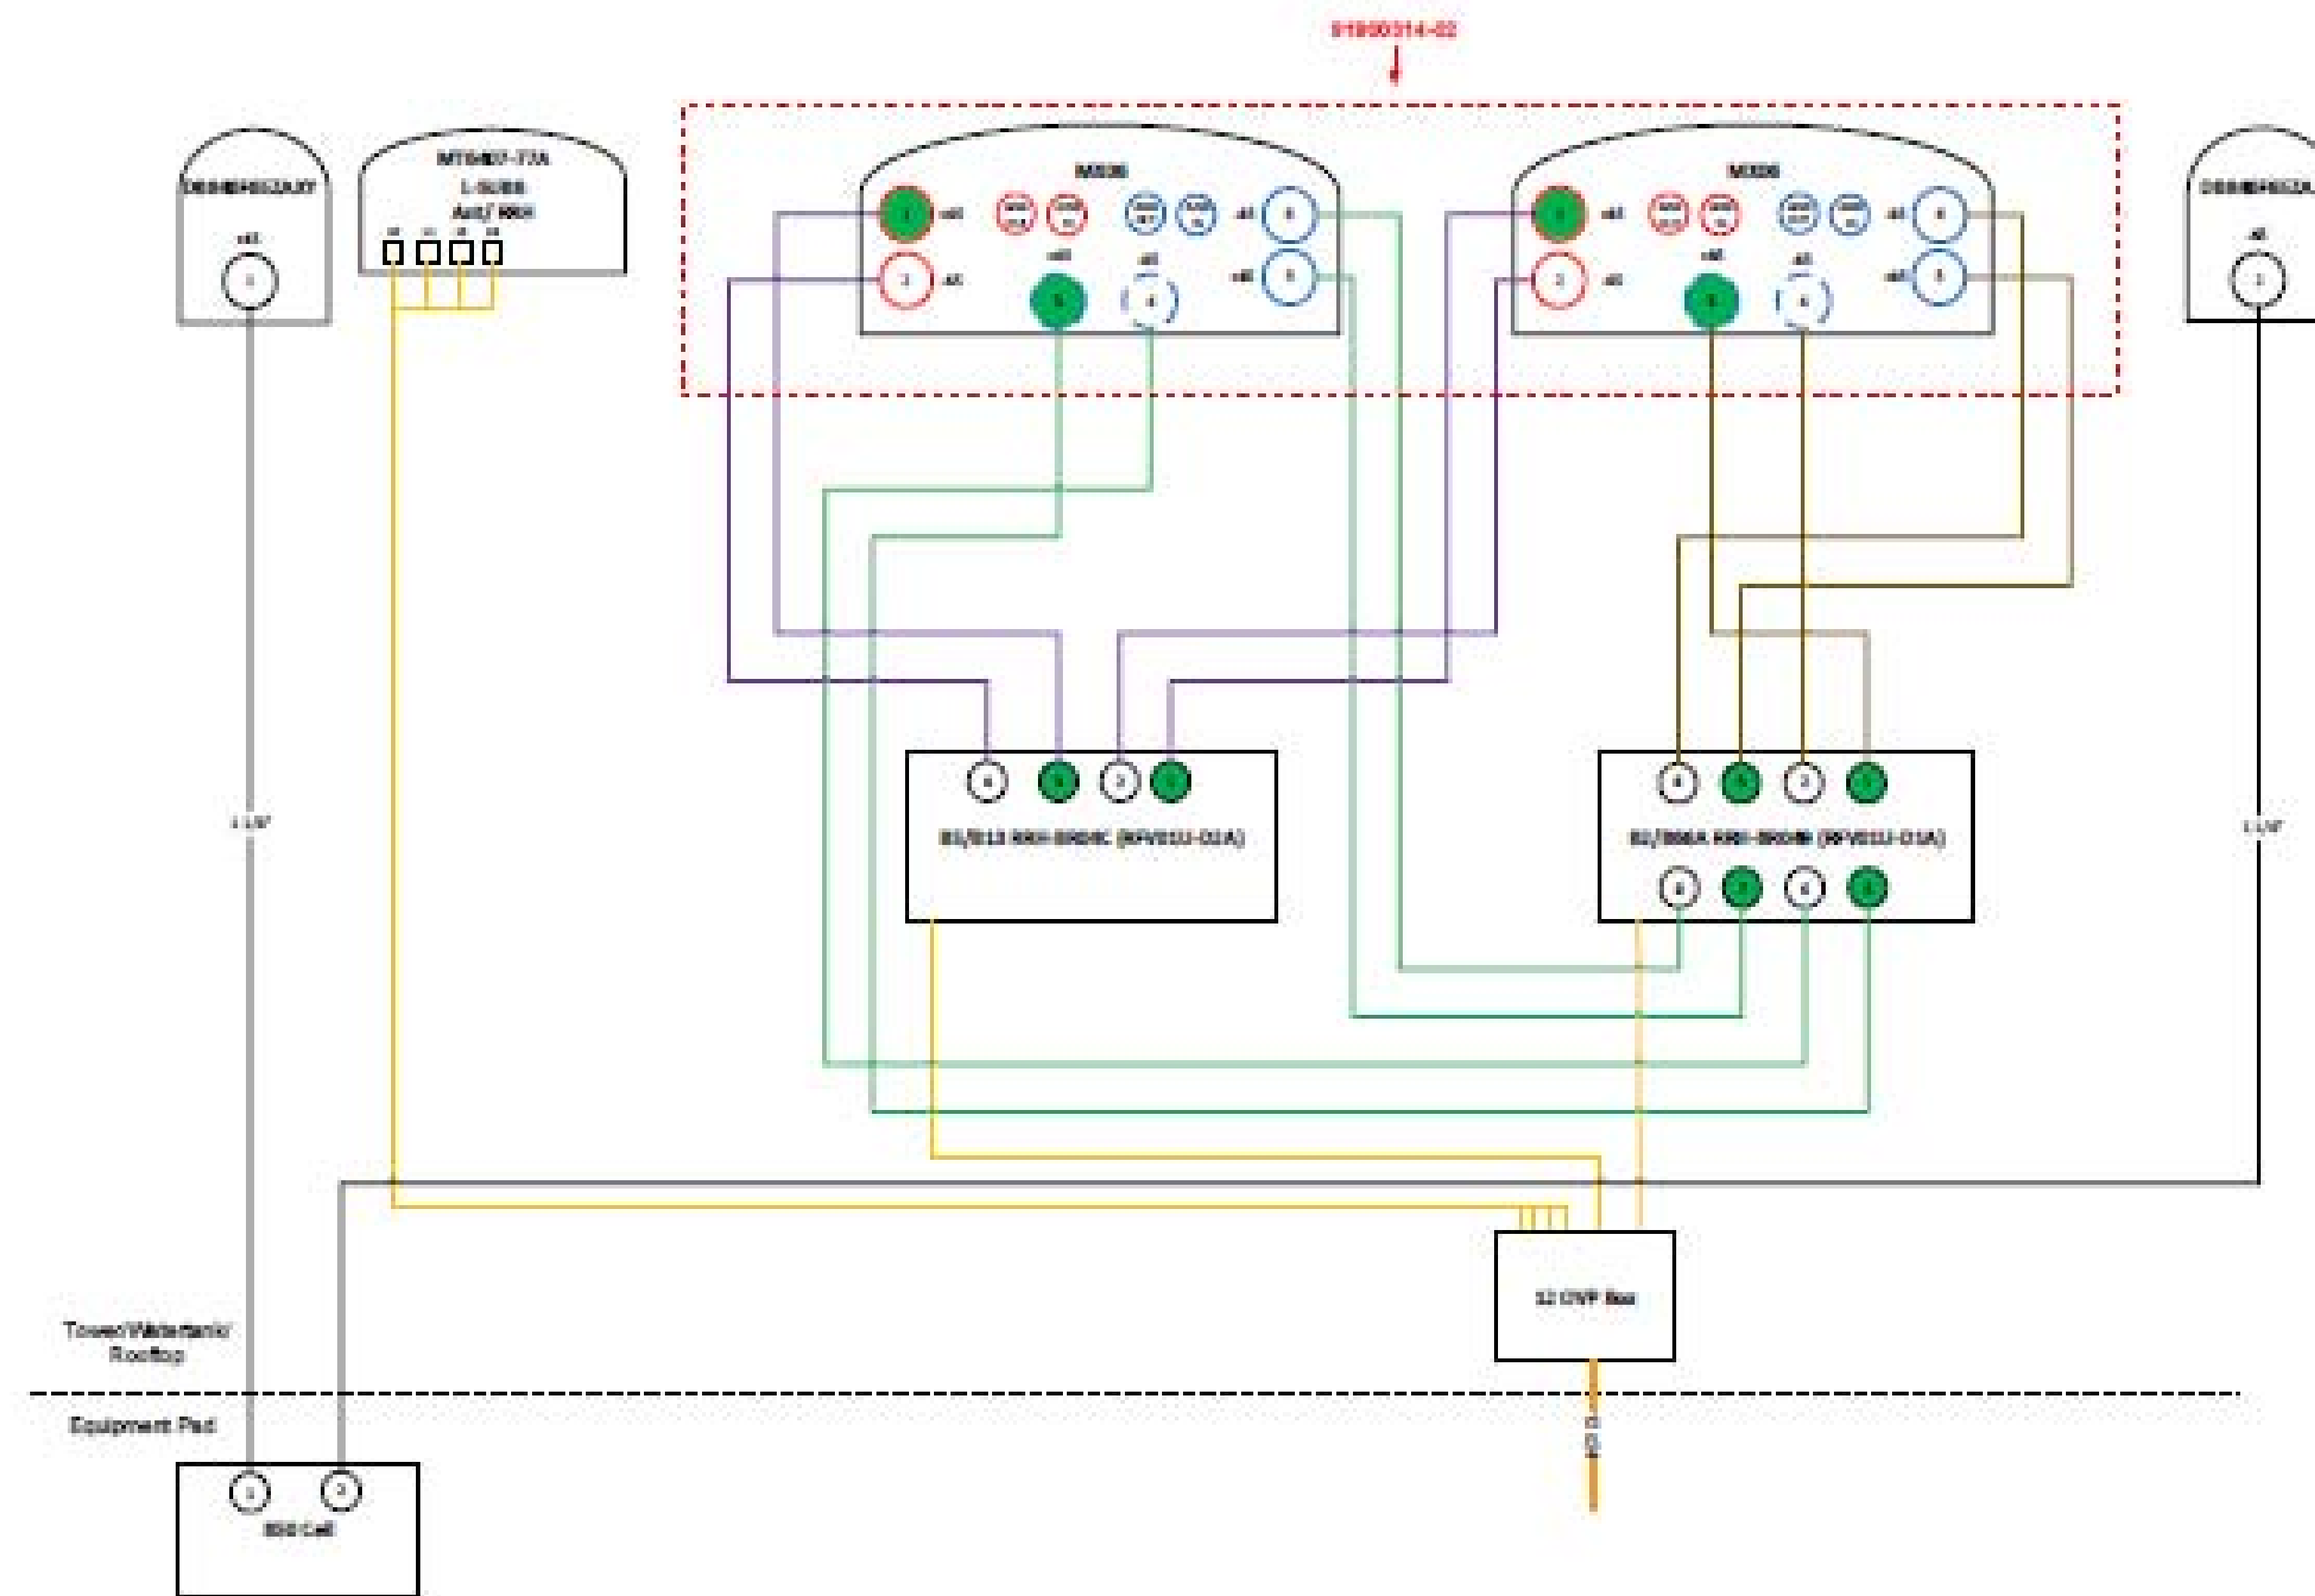

**Comments:**

Diagram shows antenna port configuration as viewed from below antennas.

Antenna positions are indicated as viewed from IN FRONT of antennas.

Cap and weatherproof unused antenna ports.

All plumbing diagram colors are irrelevant except for AISG & Hybridflex cable. (For the color colors follow Color Colors guide above).

1 PLUMBING DIAGRAM  
SCALE: NOT TO SCALE

**verizon**  
180 WASHINGTON VALLEY ROAD  
BEDMINSTER, NJ 07921

**CROWN CASTLE**  
1200 MACARTHUR BLVD, SUITE 200  
MAHWAH, NJ 07430

**B+T GRP**  
1717 S. BOULDER  
SUITE 300  
TULSA, OK 74119  
PH: (918) 587-4630  
www.btgrp.com

VERIZON SITE NUMBER:  
**467373**

BU #: **806359**  
NHV 104 943122

423 ORONOQUE RD  
MILFORD, CT 06460

EXISTING 100'-0" MONOPOLE

**ISSUED FOR:**


REV	DATE	DRWN	DESCRIPTION	DES./QA
0	4/26/22	DAS	CONSTRUCTION	MTJ

*(Professional Engineer Seal: State of Connecticut, No. 23924, License Expires 2/10/23)*

B&T ENGINEERING, INC.  
PEC.0001564  
Expires 2/10/23

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.


SHEET NUMBER: **C-6** REVISION: **0**

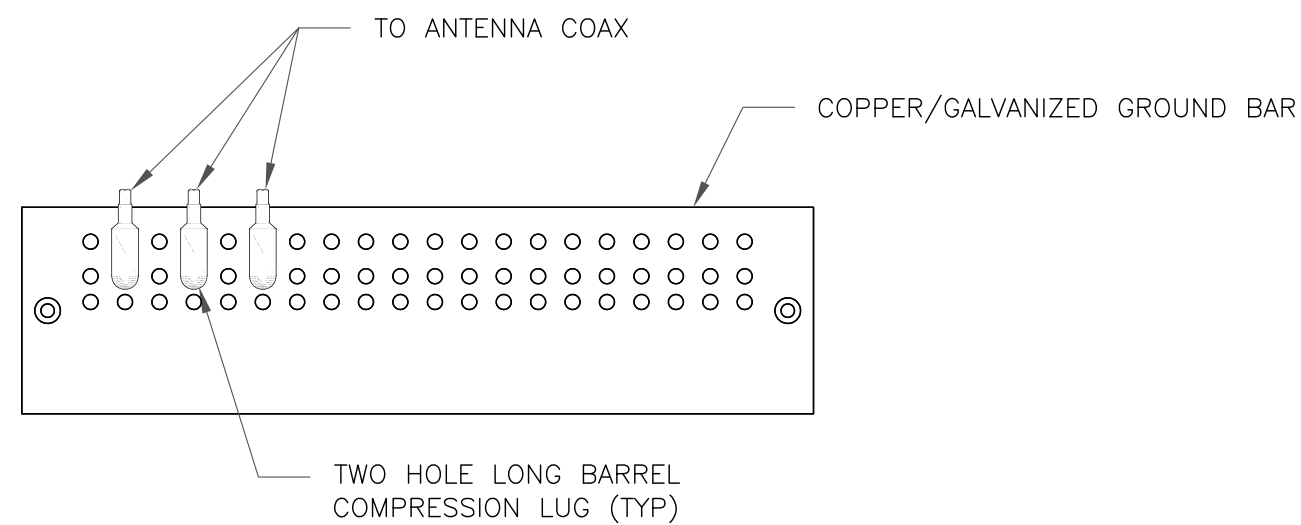

NOTES:

- DOUBLING UP "OR STACKING" OF CONNECTIONS IS NOT PERMITTED.
- EXTERIOR ANTIOXIDANT JOINT COMPOUND TO BE USED ON ALL EXTERIOR CONNECTIONS.
- GROUND BAR SHALL NOT BE ISOLATED FROM TOWER. MOUNT DIRECTLY TO ANTENNA MOUNT STEEL.


1 ANTENNA SECTOR GROUND BAR DETAIL  
SCALE: NOT TO SCALE

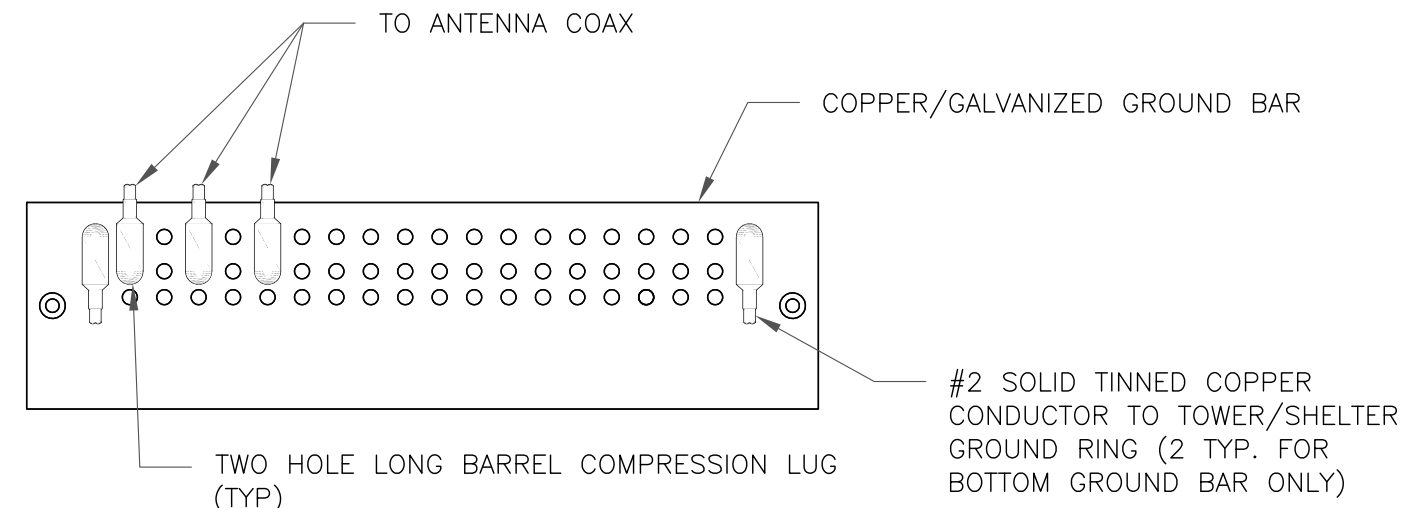

NOTES:

- EXTERIOR ANTIOXIDANT JOINT COMPOUND TO BE USED ON ALL EXTERIOR CONNECTIONS.
- GROUND BAR SHALL NOT BE ISOLATED FROM TOWER. MOUNT DIRECTLY TO TOWER STEEL (TOWER ONLY).
- GROUND BAR SHALL BE ISOLATED FROM BUILDING OR SHELTER.


2 TOWER/SHELTER GROUND BAR DETAIL  
SCALE: NOT TO SCALE

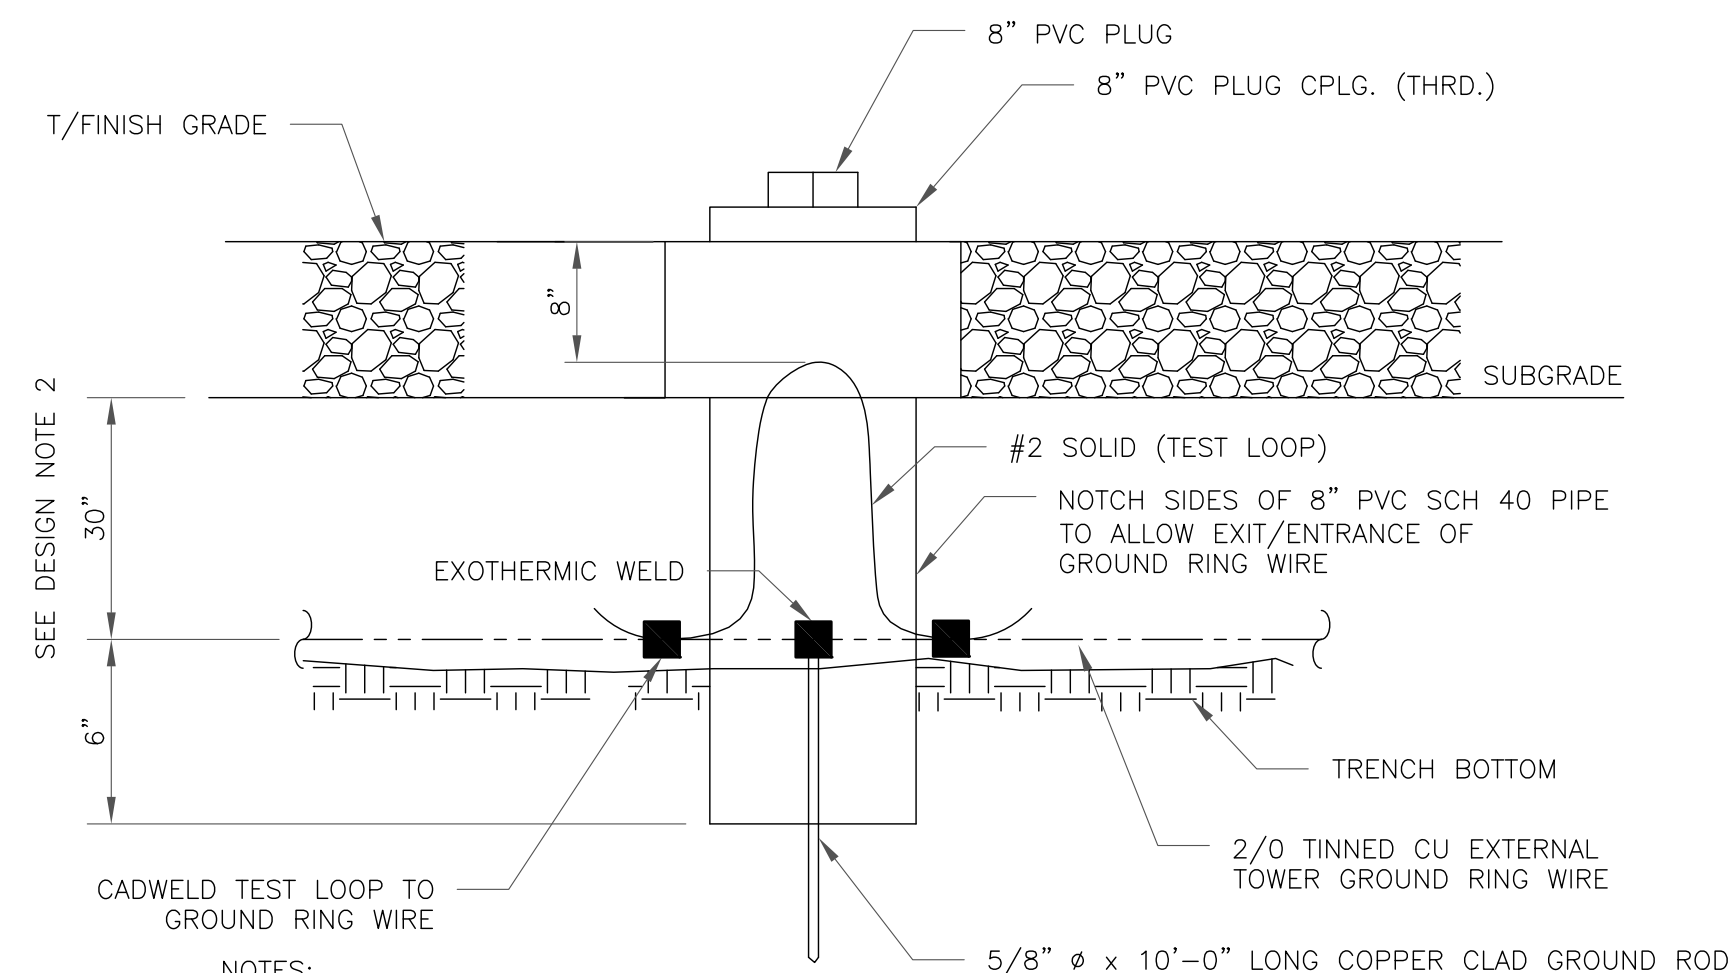

NOTES:

- GROUND ROD SHALL BE DRIVEN VERTICALLY, NOT TO EXCEED 45 DEGREES FROM THE VERTICAL
- GROUND WIRE SHALL BE MIN. 30" BELOW GRADE OR 6" BELOW FROST LINE. (WHICH EVER IS GREATER) AS PER N.E.C. ARTICLE 250-50(D)


3 INSPECTION WELL DETAIL  
SCALE: NOT TO SCALE

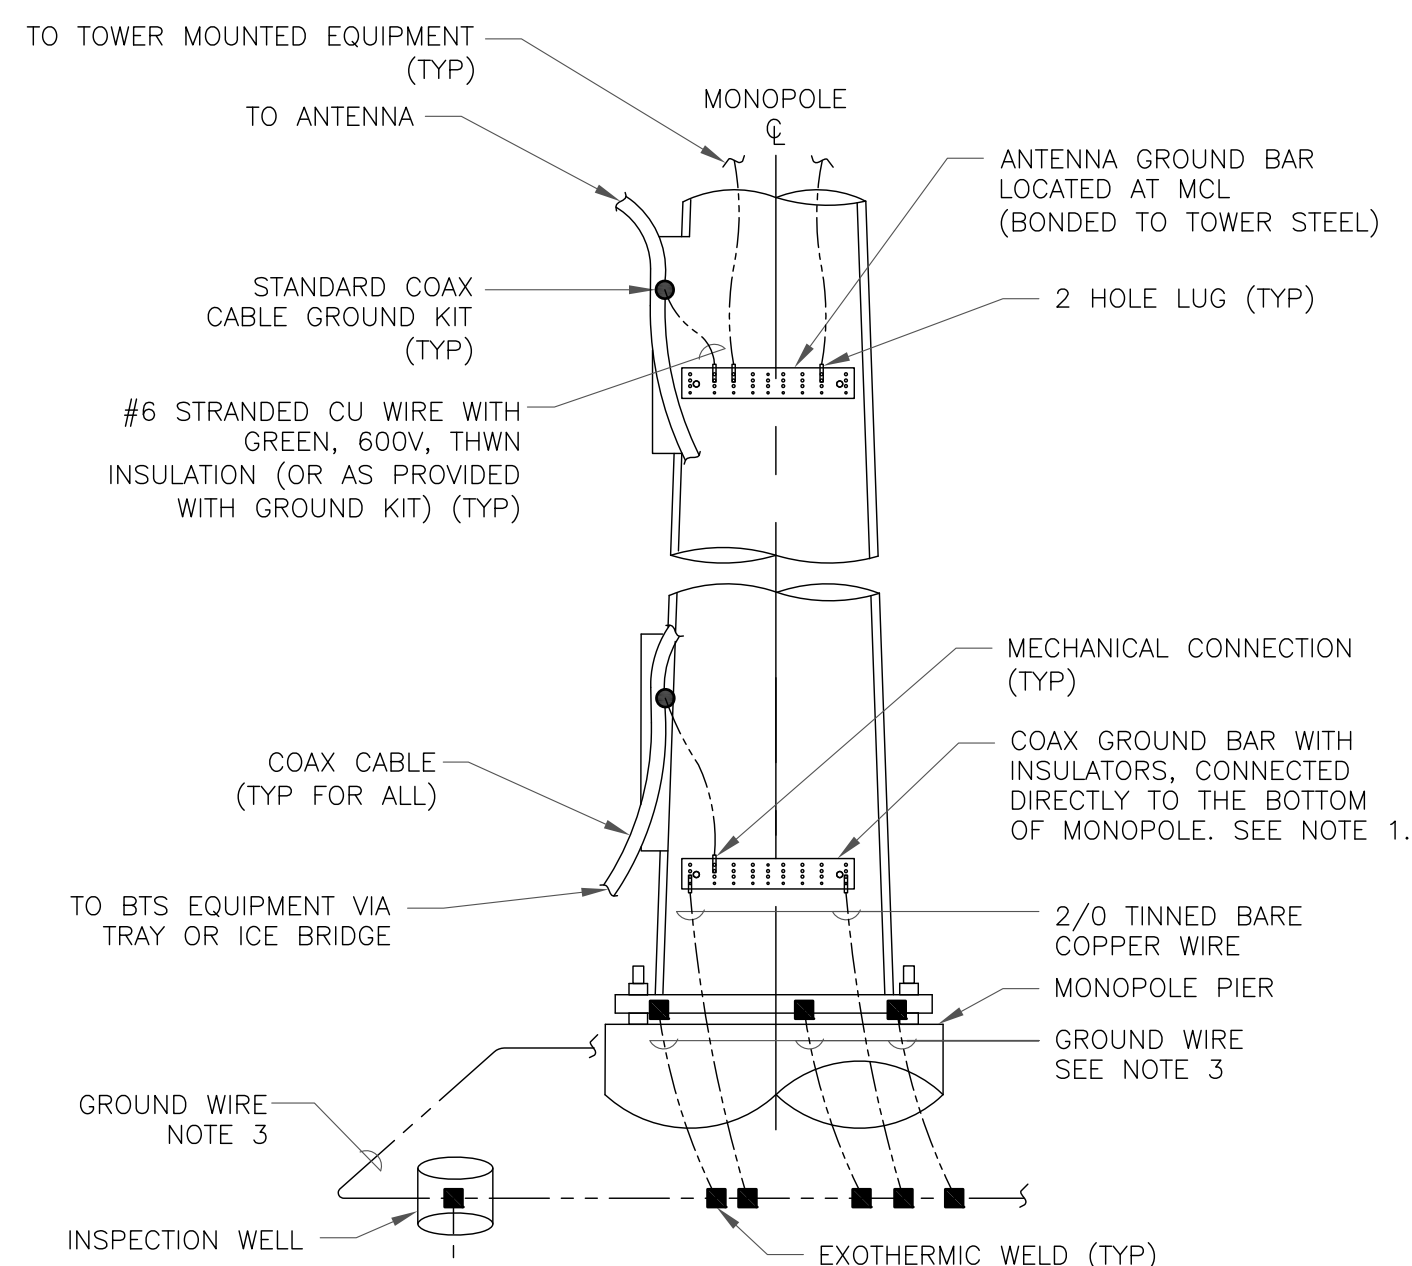


NOTES:

- NUMBER OF GROUNDING BARS MAY VARY DEPENDING ON THE TYPE OF TOWER, ANTENNA LOCATIONS AND CONNECTION ORIENTATION. COAXIAL CABLES EXCEEDING 200 FEET ON THE TOWER SHALL HAVE GROUND KITS AT THE MIDPOINT. PROVIDE AS REQUIRED.
- ONLY MECHANICAL CONNECTIONS ARE ALLOWED TO BE MADE TO CROWN CASTLE USA INC. TOWERS. ALL MECHANICAL CONNECTIONS SHALL BE TREATED WITH AN ANTI-OXIDANT COATING.
- ALL TOWER GROUNDING SYSTEMS SHALL COMPLY WITH THE REQUIREMENTS OF THE RECOGNIZED EDITION OF ANSI/TIA 222 AND NFPA 780.

4 TYPICAL ANTENNA CABLE GROUNDING  
SCALE: NOT TO SCALE

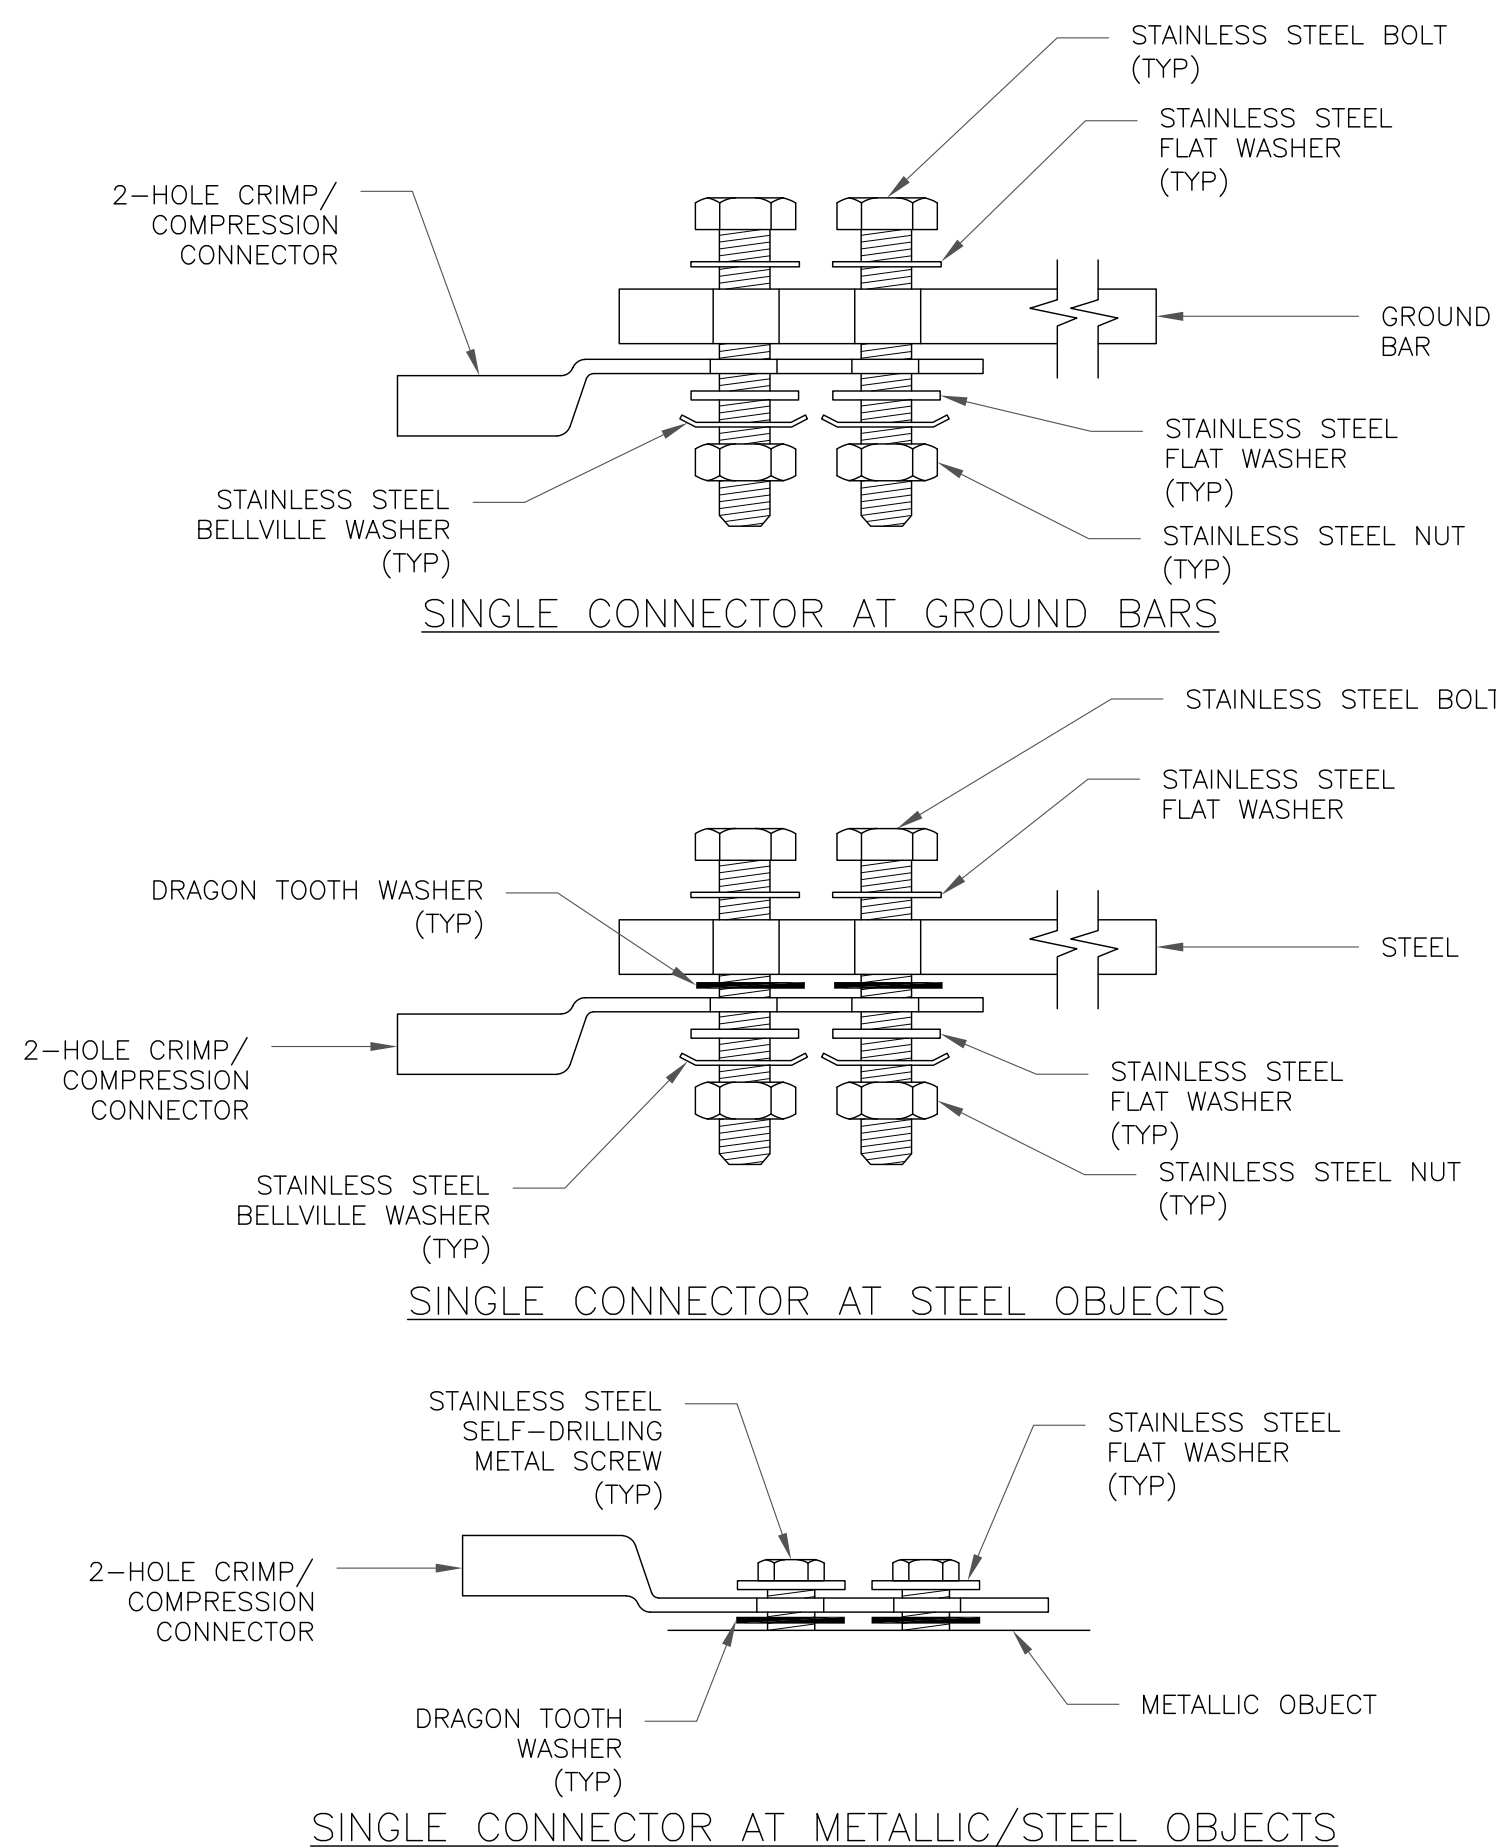

5 HARDWARE DETAIL FOR EXTERIOR CONNECTIONS  
SCALE: NOT TO SCALE

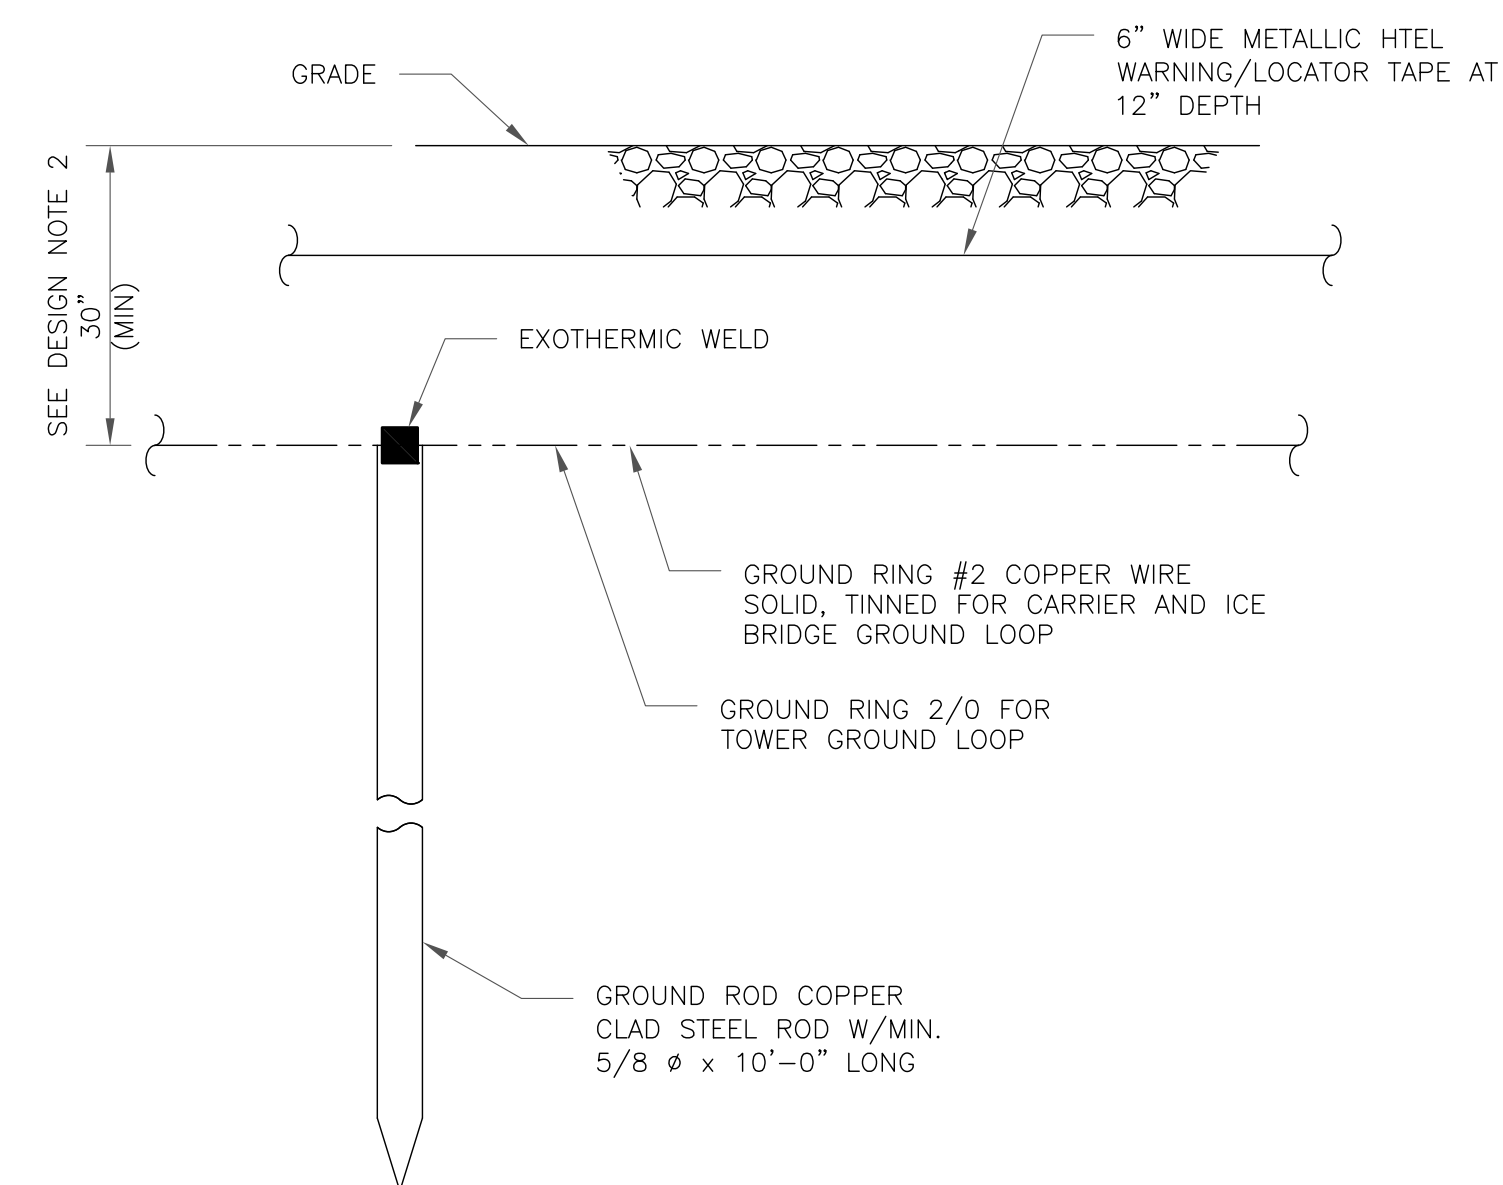

NOTES:

- GROUND ROD SHALL BE DRIVEN VERTICALLY, NOT TO EXCEED 45 DEGREES FROM THE VERTICAL
- GROUND WIRE SHALL BE MIN. 30" BELOW GRADE OR 6" BELOW FROST LINE. (WHICH EVER IS GREATER) AS PER N.E.C. ARTICLE 250-50(D)

6 GROUND ROD DETAIL  
SCALE: NOT TO SCALE

**verizon**  
180 WASHINGTON VALLEY ROAD  
BEDMINSTER, NJ 07921

**CROWN CASTLE**  
1200 MACARTHUR BLVD, SUITE 200  
MAHWAH, NJ 07430

**B+T GRP**  
1717 S. BOULDER  
SUITE 300  
TULSA, OK 74119  
PH: (918) 587-4630  
www.btgrp.com

VERIZON SITE NUMBER:  
**467373**

BU #: **806359**  
NHV 104 943122

423 ORONOQUE RD  
MILFORD, CT 06460

EXISTING 100'-0" MONOPOLE

ISSUED FOR:


REV	DATE	DRWN	DESCRIPTION	DES./QA
0	4/26/22	DAS	CONSTRUCTION	MTJ



B&T ENGINEERING, INC.  
PEC.0001564  
Expires 2/10/23  
IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SHEET NUMBER: **G-1** REVISION: **0**




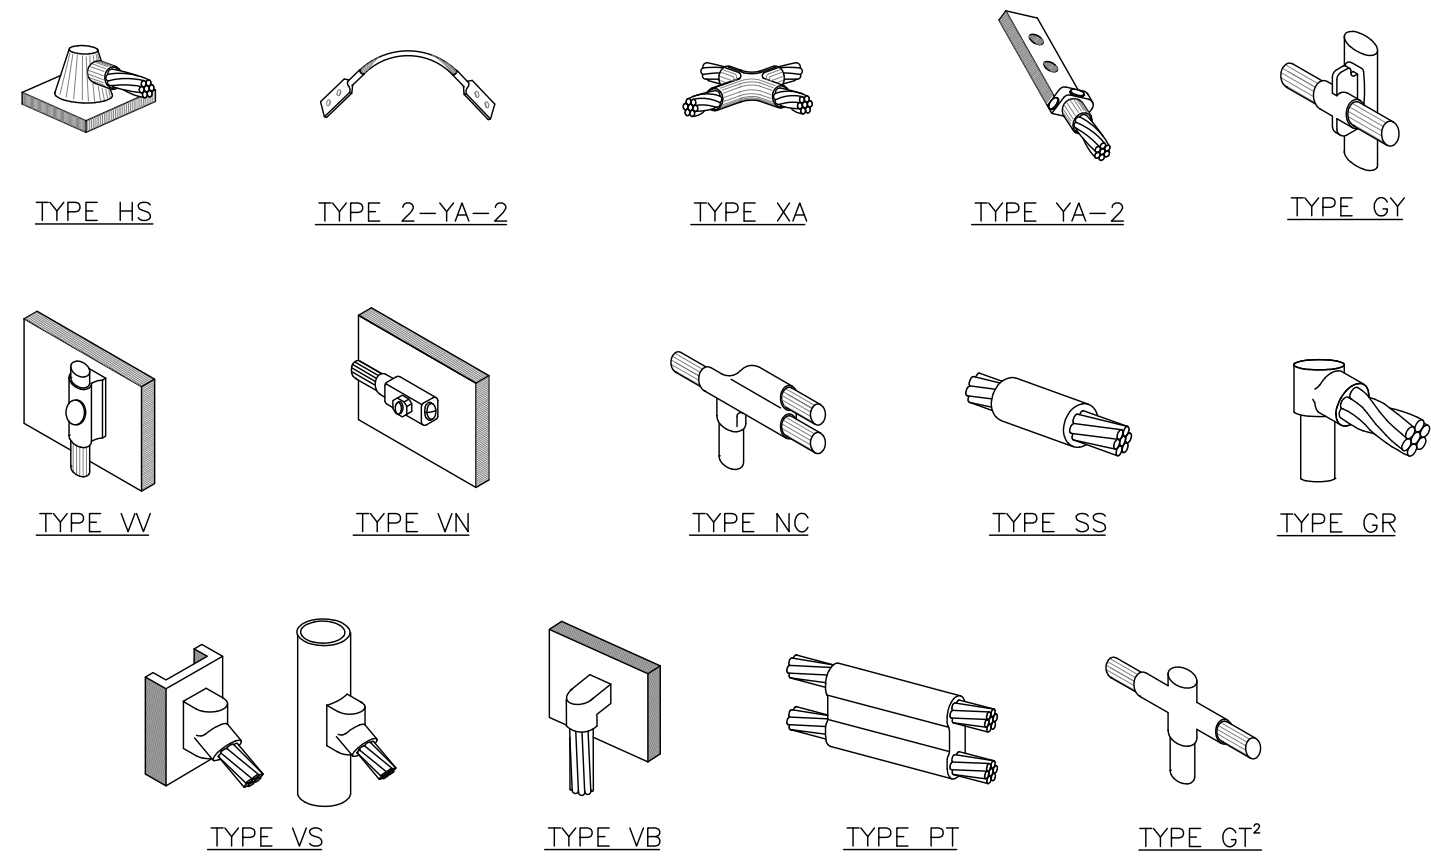

**NOTE:**

1. ERICO EXOTHERMIC "MOLD TYPES" SHOWN HERE ARE EXAMPLES. CONSULT WITH CONSTRUCTION MANAGER FOR SPECIFIC MOLDS TO BE USED FOR THIS PROJECT.
2. MOLD TYPE ONLY TO BE USED BELOW GRADE WHEN CONNECTING GROUND RING TO GROUND ROD.


**1 CADWELD GROUNDING CONNECTIONS**  
SCALE: NOT TO SCALE

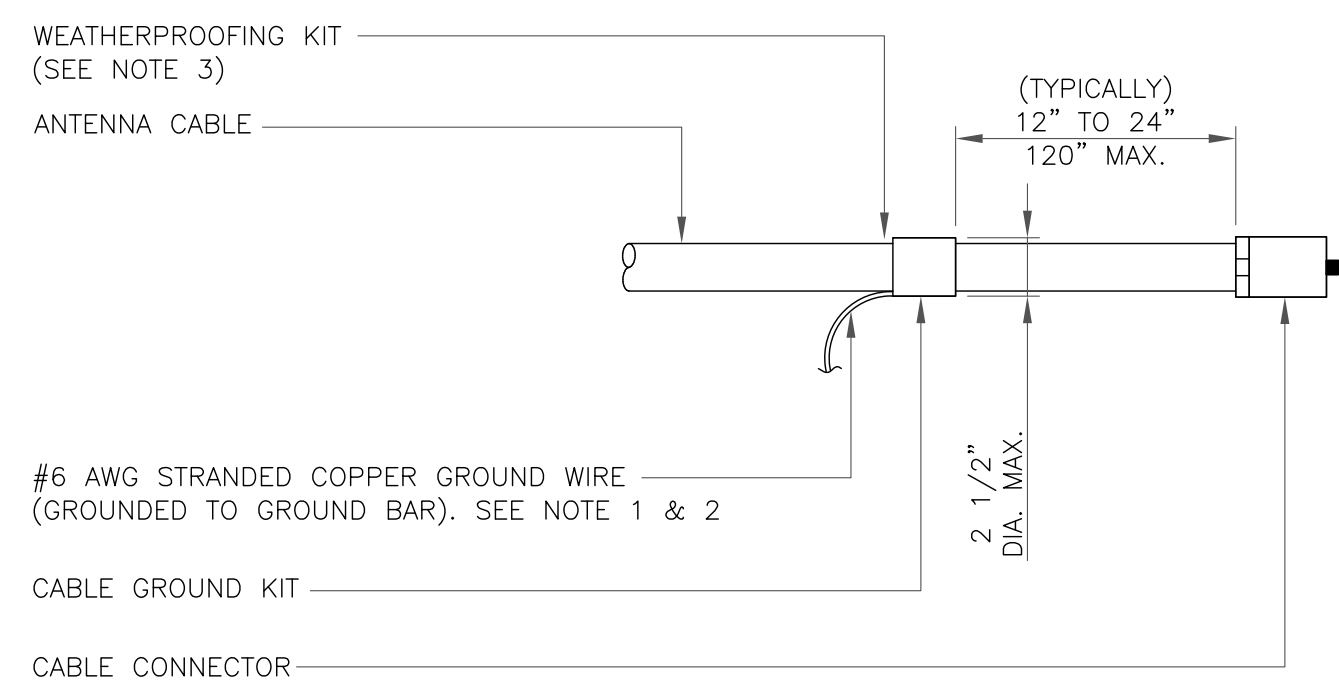

**NOTES:**

1. DO NOT INSTALL CABLE GROUND KIT AT A BEND AND ALWAYS DIRECT GROUND WIRE DOWN TO GROUND BAR.
2. GROUNDING KIT SHALL BE TYPE AND PART NUMBER AS SUPPLIED OR RECOMMENDED BY CABLE MANUFACTURER.
3. WEATHER PROOFING SHALL BE TWO-PART TAPE KIT. COLD SHRINK SHALL NOT BE USED.


**3 CABLE GROUND KIT CONNECTION**  
SCALE: NOT TO SCALE

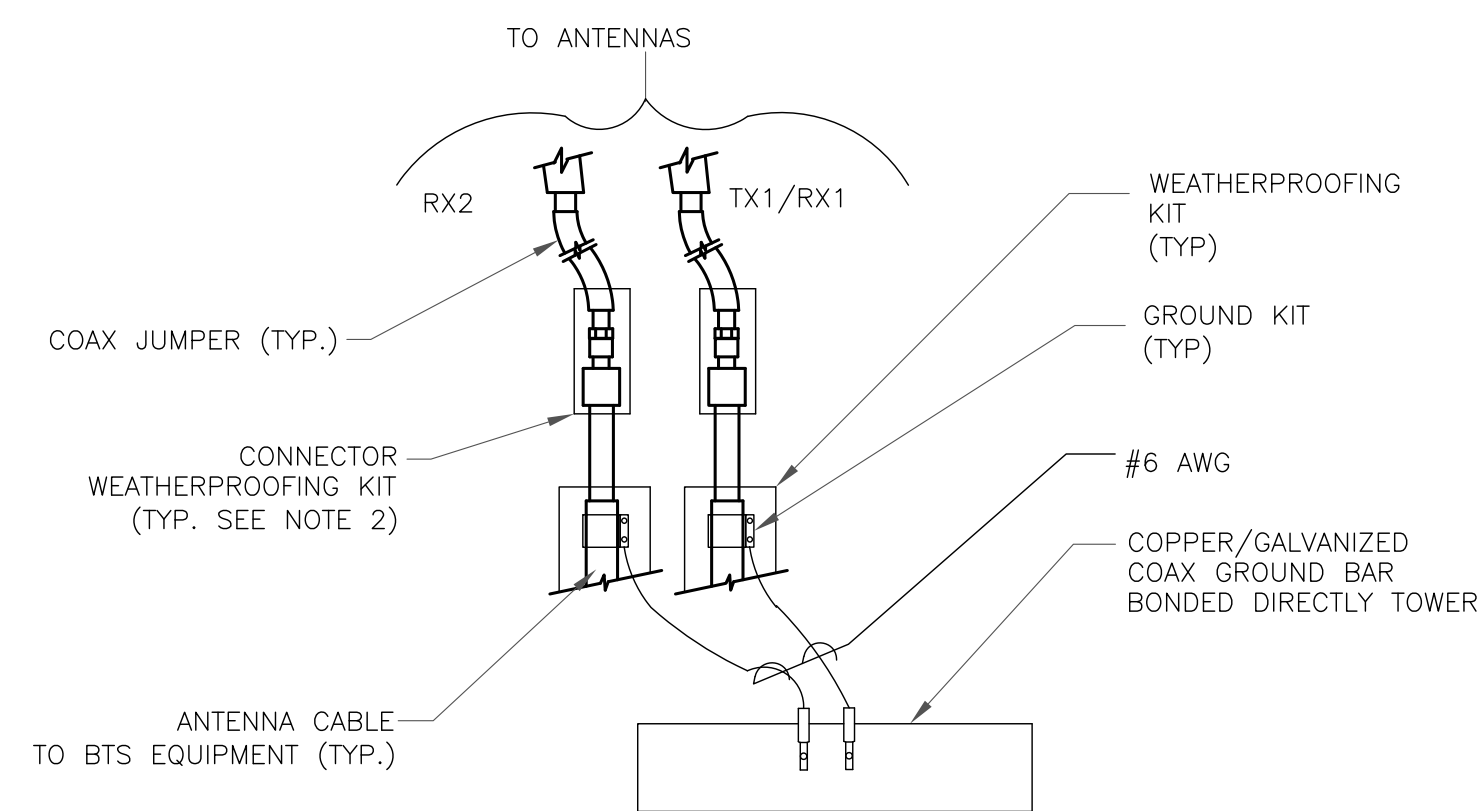

**NOTES:**

1. DO NOT INSTALL CABLE GROUND KIT AT A BEND AND ALWAYS DIRECT GROUND WIRE DOWN TO ANTENNA GROUND BAR.
2. WEATHER PROOFING SHALL BE TWO-PART TAPE KIT. COLD SHRINK SHALL NOT BE USED.


**4 GROUND CABLE CONNECTION**  
SCALE: NOT TO SCALE

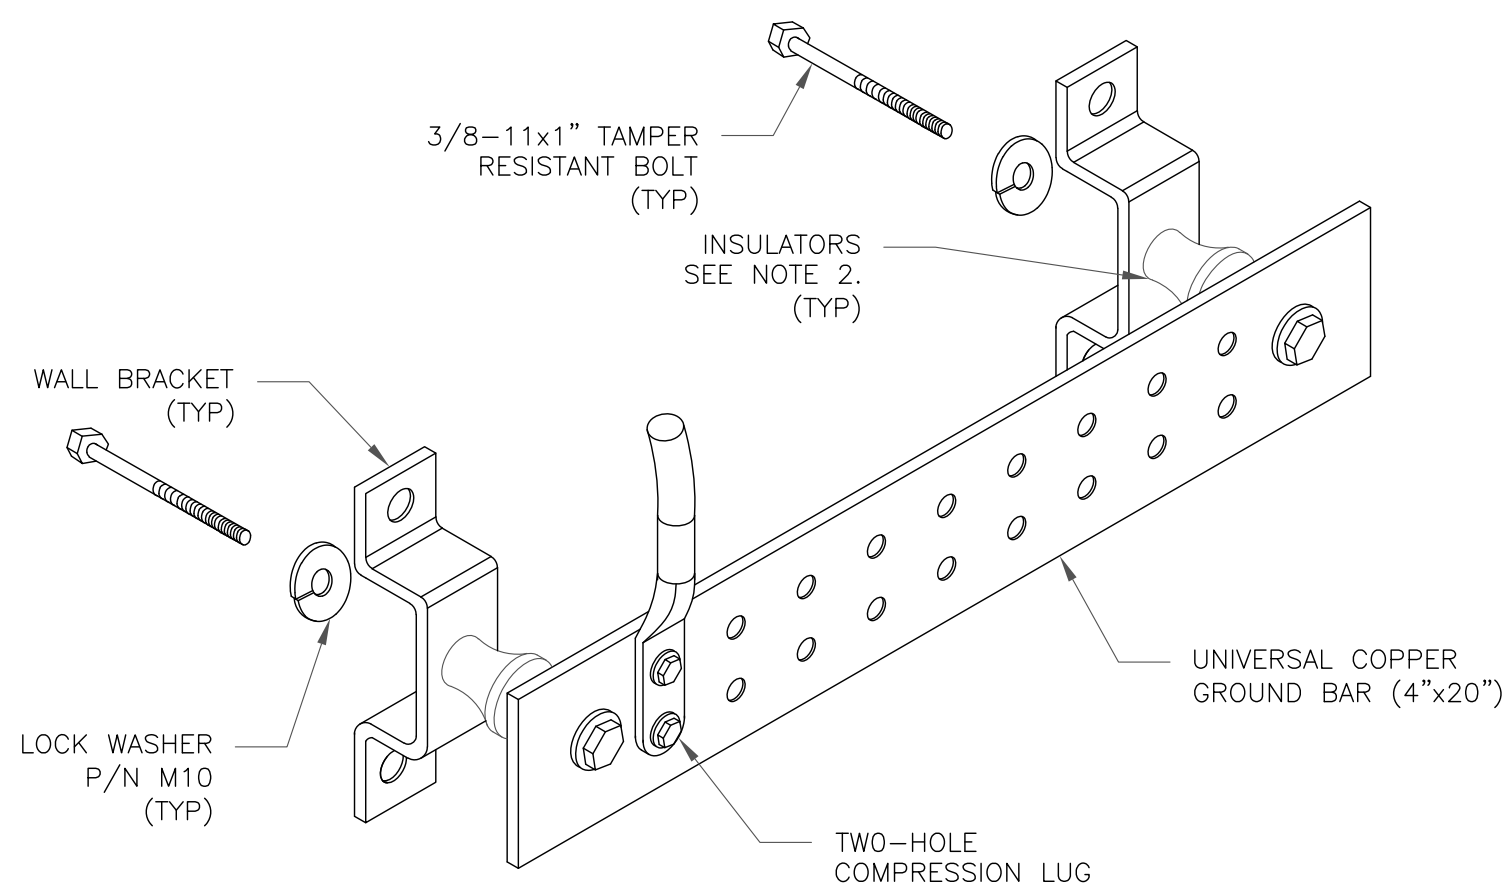

**NOTES:**


1. DOWN LEAD (HOME RUN) CONDUCTORS ARE NOT TO BE INSTALLED ON CROWN CASTLE USA INC. TOWER, PER THE GROUNDING DOWN CONDUCTOR POLICY QAS-STD-10091. NO MODIFICATION OR DRILLING TO TOWER STEEL IS ALLOWED IN ANY FORM OR FASHION. CAD-WELDING ON THE TOWER AND/OR IN THE AIR ARE NOT PERMITTED.
2. OMIT INSULATOR WHEN MOUNTING TO TOWER STEEL OR PLATFORM STEEL. USE INSULATORS WHEN ATTACHING TO BUILDING OR SHELTERS.

**6 GROUND BAR DETAIL**  
SCALE: NOT TO SCALE

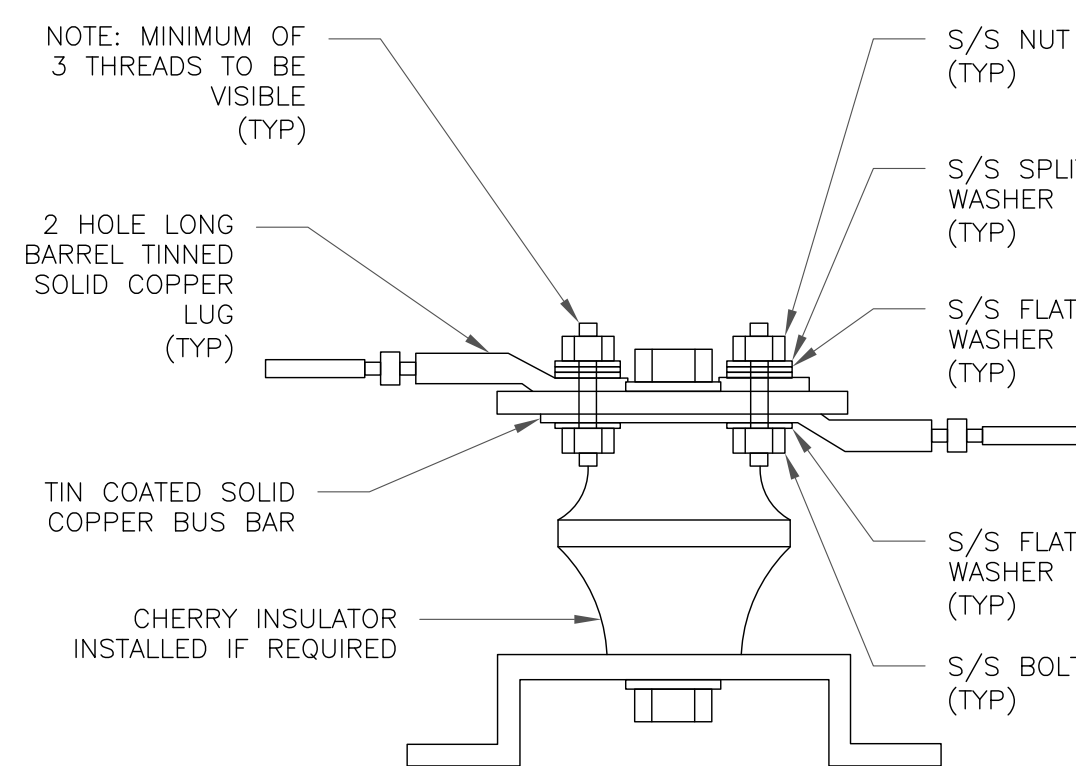

**7 LUG DETAIL**  
SCALE: NOT TO SCALE


WIRE SIZE	BURNDY LUG	BOLT SIZE
#6 AWG GREEN INSULATED	YA6C-2TC38	3/8" - 16 NC S 2 BOLT
#2 AWG SOLID TINNED	YA3C-2TC38	3/8" - 16 NC S 2 BOLT
#2 AWG STRANDED	YA2C-2TC38	3/8" - 16 NC S 2 BOLT
#2/0 AWG STRANDED	YA26-2TC38	3/8" - 16 NC S 2 BOLT
#4/0 AWG STRANDED	YA28-2N	1/2" - 16 NC S 2 BOLT

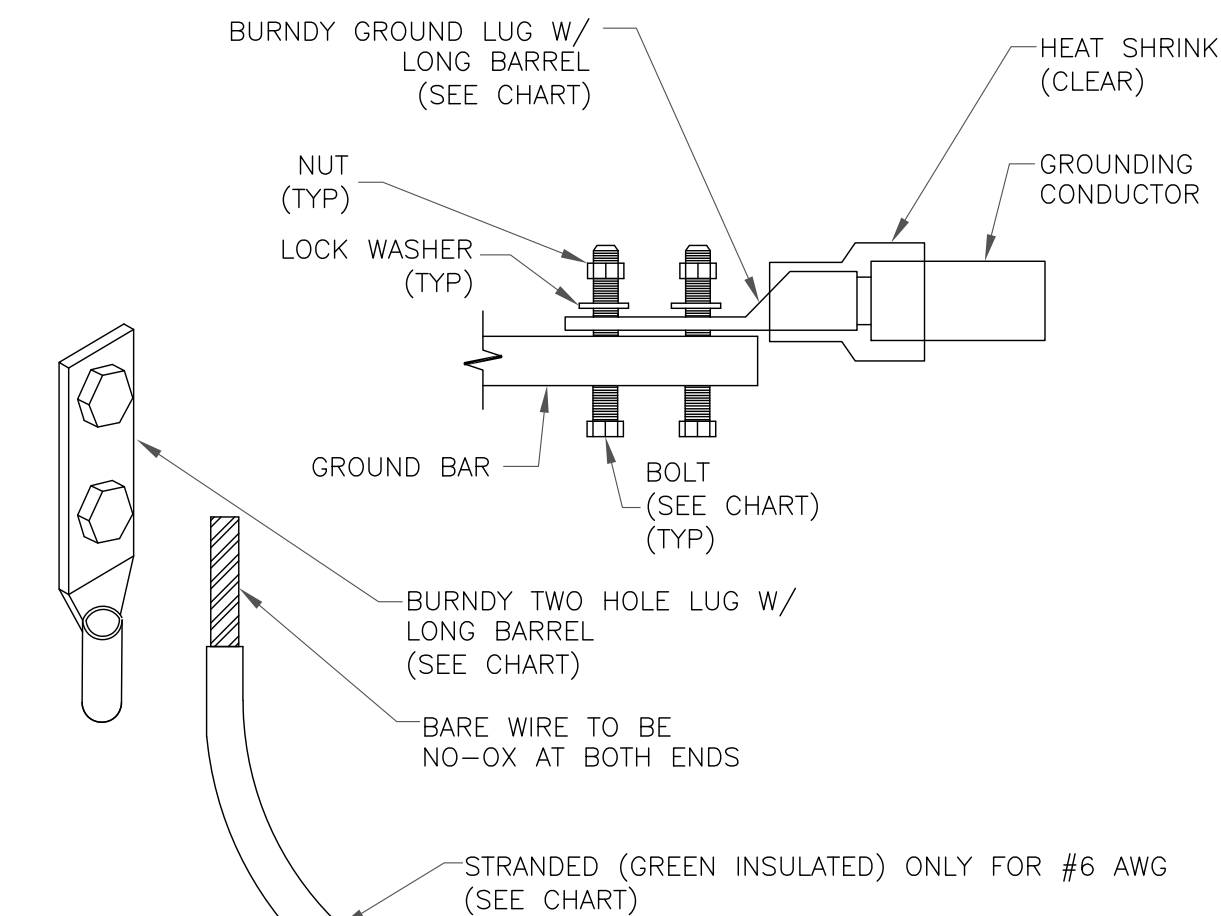


**NOTES:**

1. ALL GROUNDING LUGS ARE TO BE INSTALLED PER MANUFACTURER'S SPECIFICATIONS. ALL HARDWARE BOLTS, NUTS, LOCK WASHERS SHALL BE STAINLESS STEEL. ALL HARDWARE ARE TO BE AS FOLLOWS: BOLT, FLAT WASHER, GROUND BAR, GROUND LUG, FLAT WASHER AND NUT.

**2 MECHANICAL LUG CONNECTION**  
SCALE: NOT TO SCALE

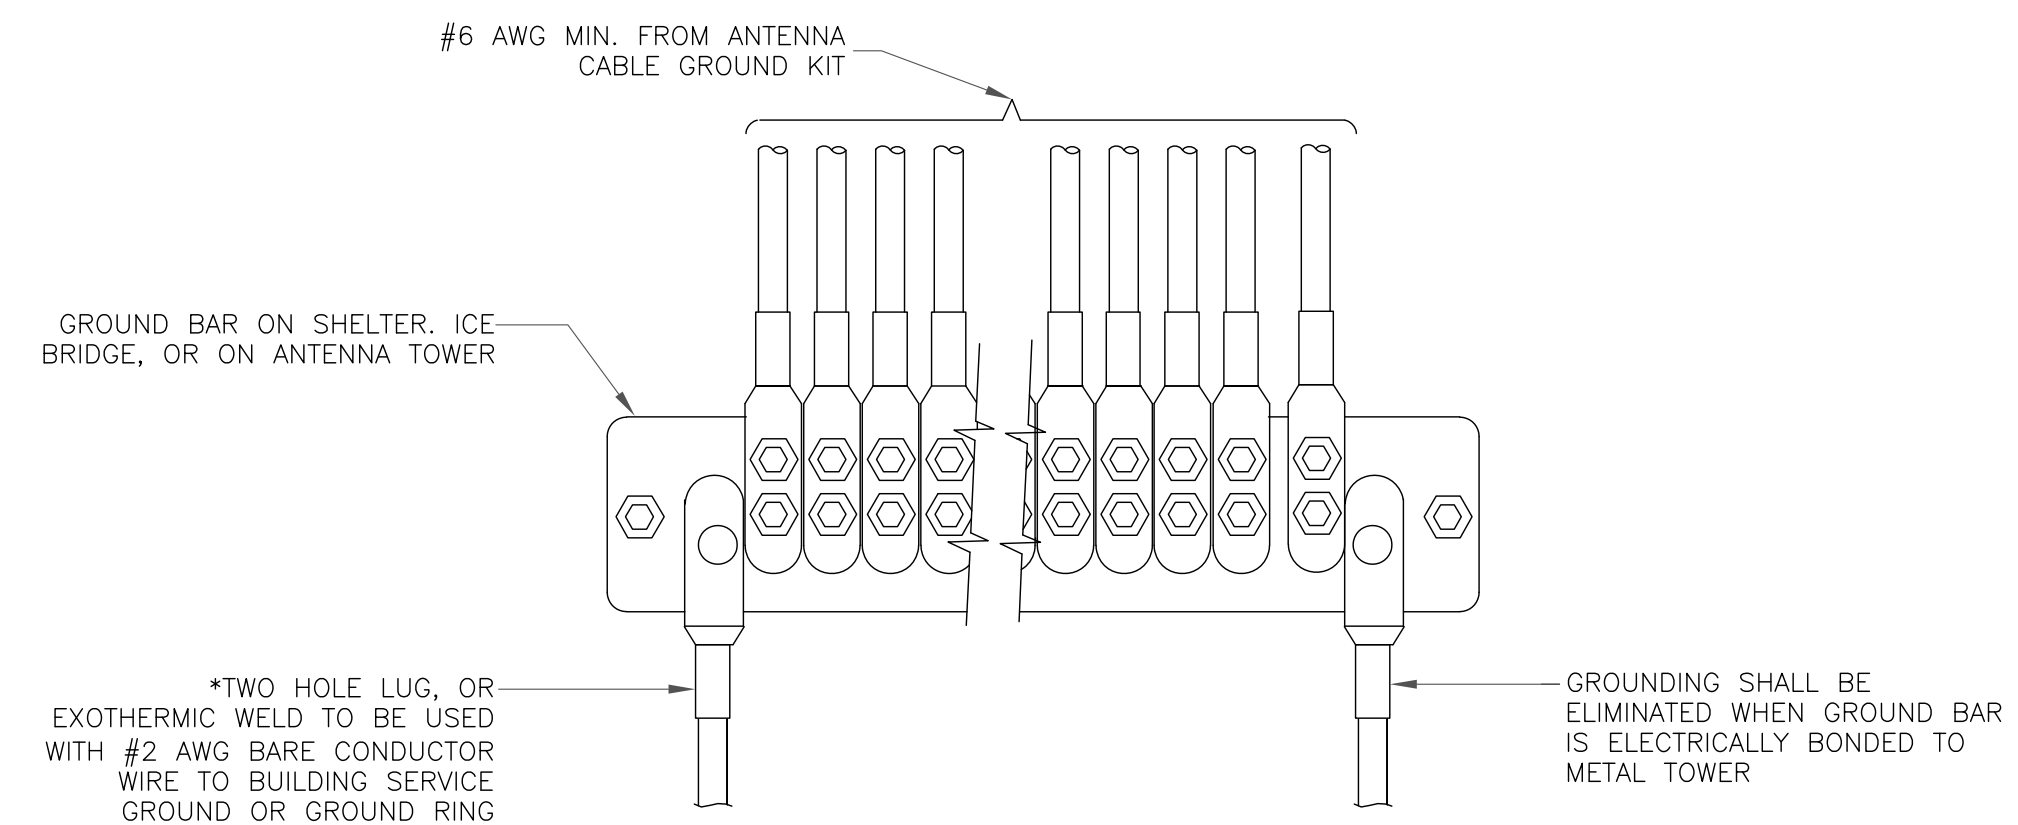

**5 GROUNDWIRE INSTALLATION**  
SCALE: NOT TO SCALE

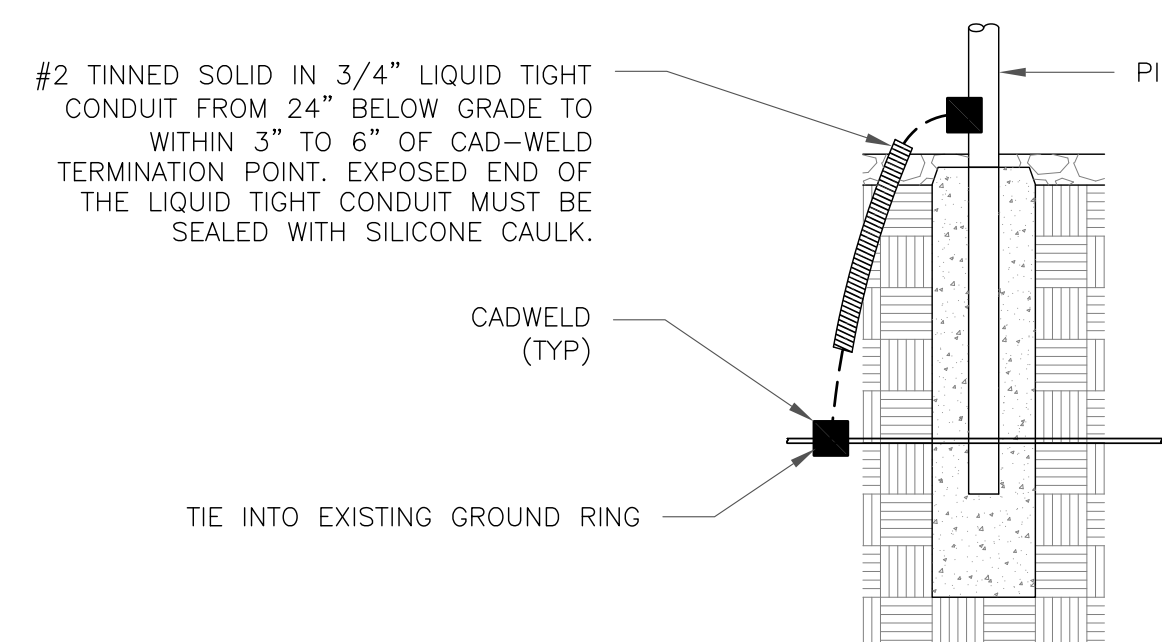

**8 TRANSITIONING GROUND DETAIL**  
SCALE: NOT TO SCALE

**verizon**  
180 WASHINGTON VALLEY ROAD  
BEDMINSTER, NJ 07921

**CROWN CASTLE**  
1200 MACARTHUR BLVD, SUITE 200  
MAHWAH, NJ 07430

**B+T GRP**  
1717 S. BOULDER  
SUITE 300  
TULSA, OK 74119  
PH: (918) 587-4630  
www.btgrp.com

VERIZON SITE NUMBER:  
**467373**

BU #: **806359**  
NHV 104 943122

423 ORONOQUE RD  
MILFORD, CT 06460

EXISTING 100'-0" MONOPOLE

**ISSUED FOR:**

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	4/26/22	DAS	CONSTRUCTION	MTJ



B&T ENGINEERING, INC.  
PEC.0001564  
Expires 2/10/23  
IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SHEET NUMBER: **G-2** REVISION: **0**



MOUNT MODIFICATION DRAWINGS  
EXISTING 12.83' PLATFORM

TOWER OWNER: CROWN CASTLE  
TOWER OWNER SITE NUMBER: 806359

CARRIER SITE NAME: MILFORD CT  
CARRIER SITE NUMBER: 467373  
FUZE ID: 16231875

423 ORONOQUE RD  
MILFORD, CT 06460  
NEW HAVEN COUNTY

LATITUDE: 41.237875° N  
LONGITUDE: 73.086219° W

DESIGN CRITERIA
<b>WIND LOADS</b> BASIC WIND SPEED (3 SECOND GUST), V = 119 MPH EXPOSURE CATEGORY C TOPOGRAPHIC CATEGORY I MEAN BASE ELEVATION (AMSL) = 167.39'
<b>ICE LOADS</b> ICE WIND SPEED (3 SECOND GUST), V = 50 MPH ICE THICKNESS = 1.00 IN
<b>SEISMIC LOADS</b> SEISMIC DESIGN CATEGORY B SHORT TERM MCER GROUND MOTION, S <sub>s</sub> = .203 LONG TERM MCER GROUND MOTION, S <sub>l</sub> = .054

PROJECT INFORMATION
<b>APPLICANT/LESSEE</b> COMPANY: VERIZON WIRELESS
<b>CLIENT REPRESENTATIVE</b> COMPANY: VERIZON WIRELESS
<b>PROJECT MANAGER</b> COMPANY: MASER CONSULTING CONTACT: PETER ALBANO PHONE: 856-797-0412 E-MAIL: PETER.ALBANO@COLLIERSENGINEERING.COM

SHEET INDEX	
SHEET	DESCRIPTION
ST-1	TITLE SHEET
SBOM-1	BILL OF MATERIALS
SGN-1	GENERAL NOTES
SCF-1	CLIMBING FACILITY DETAIL
SS-1	MODIFICATION DETAILS
SS-2	MOUNT PHOTOS
	SPECIFICATION SHEETS

CONTRACTOR PMI REQUIREMENTS	
PMI LOCATION:	HTTPS://PMI.VZWSMART.COM
SMART TOOL PROJECT #:	10063096
VZW LOCATION CODE (PSLC):	467373
ANALYSIS DATE:	1/24/2022
PMI REQUIREMENTS EMBEDDED WITHIN MOUNT MODIFICATION REPORT	


**COPYRIGHT ©2022  
MASER CONSULTING CONNECTICUT  
ALL RIGHTS RESERVED**

THIS DRAWING AND ALL THE INFORMATION CONTAINED HEREIN IS AUTHORIZED FOR USE ONLY BY THE PARTY FOR WHOM THE WORK WAS CONTRACTED OR TO WHOM IT IS CERTIFIED. THIS DRAWING MAY NOT BE COPIED, REUSED, DISCLOSED, DISTRIBUTED OR RELIED UPON FOR ANY OTHER PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF MASER CONSULTING

WILL BE KNOWN AS COLLIER ENGINEERING & DESIGN IN 2021  
Customer Loyalty through Client Satisfaction  
www.maserconsulting.com  
Office Locations:

- NEW JERSEY
- NEW YORK
- PENNSYLVANIA
- VIRGINIA
- FLORIDA
- NORTH CAROLINA
- SOUTH CAROLINA
- NEW MEXICO
- MARYLAND
- GEORGIA
- TEXAS
- TENNESSEE
- COLORADO

MASER CONSULTING, C.O.A. #: JPC.0000131  
Copyright © 2022, Maser Consulting All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting.



**PROTECT YOURSELF**  
ALL STATES REQUIRE NOTIFICATION OF EXCAVATIONS, DESIGNERS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE

Know what's below.  
Call before you dig.

FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT:  
WWW.CALL811.COM

SCALE:	AS SHOWN	JOB NUMBER:	21777070A
REV	DATE	DESCRIPTION	DRAWN BY / CHECKED BY
0	1/24/2022	ISSUED FOR CONSTRUCTION	SC / EA

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF THE RESPONSIBLE LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

**SITE NAME:**

MILFORD CT  
467373  
423 ORONOQUE RD  
MILFORD, CT 06460  
NEW HAVEN COUNTY

STAMFORD OFFICE  
1055 Washington Boulevard  
Stamford, CT 06901  
Phone: 203.324.0800

SHEET TITLE:  
TITLE SHEET

SHEET NUMBER:  
ST-1





**PROJECT NOTES**

- SEE MODIFICATION NOTES
- THE CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE CODES, ORDINANCES, LAWS AND REGULATIONS OF ALL MUNICIPALITIES, UTILITY COMPANIES OR OTHER PUBLIC/GOVERNING AUTHORITIES.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL PERMITS AND INSPECTIONS THAT MAY BE REQUIRED BY ANY FEDERAL, STATE, COUNTY OR MUNICIPAL AUTHORITIES.
- THE CONTRACTOR SHALL NOTIFY THE CONSTRUCTION MANAGER, IN WRITING, OF ANY CONFLICTS, ERRORS OR OMISSIONS PRIOR TO THE SUBMISSION OF BIDS OR PERFORMANCE OF WORK.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING ALL EXISTING SITE IMPROVEMENTS PRIOR TO COMMENCING CONSTRUCTION. THE CONTRACTOR SHALL REPAIR ANY DAMAGE AS A RESULT OF CONSTRUCTION OF THIS FACILITY AT THE CONTRACTOR'S EXPENSE TO THE SATISFACTION OF THE OWNER.
- THE SCOPE OF WORK FOR THIS PROJECT SHALL INCLUDE PROVIDING ALL MATERIALS, EQUIPMENT AND LABOR REQUIRED TO COMPLETE THIS PROJECT. ALL EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
- THE CONTRACTOR SHALL VISIT THE PROJECT SITE PRIOR TO SUBMITTING THE BID TO VERIFY THAT THE PROJECT CAN BE CONSTRUCTED IN ACCORDANCE WITH THE CONTRACT DOCUMENTS AND CONSTRUCTION DRAWINGS.
- THE CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS PRIOR TO COMMENCING ANY WORK. ALL DIMENSIONS OF EXISTING CONSTRUCTION SHOWN ON THESE DRAWINGS MUST BE VERIFIED. THE CONTRACTOR SHALL NOTIFY THE CONSTRUCTION MANAGER OF ANY DISCREPANCIES PRIOR TO ORDERING MATERIAL OR PROCEEDING WITH CONSTRUCTION.
- SINCE THE CELL SITE MAY BE ACTIVE, ALL SAFETY PRECAUTIONS MUST BE TAKEN WHEN WORKING AROUND HIGH LEVELS OF ELECTROMAGNETIC RADIATION. EQUIPMENT SHOULD BE SHUTDOWN PRIOR TO PERFORMING ANY WORK THAT COULD EXPOSE THE WORKERS TO DANGER. PERSONAL RF EXPOSURE MONITORS ARE REQUIRED TO BE WORN TO ALERT OF ANY POTENTIALLY DANGEROUS EXPOSURE LEVELS.
- NO NOISE, SMOKE, DUST OR ODOR WILL RESULT FROM THIS FACILITY AS TO CAUSE A NUISANCE.
- THE FACILITY IS UNMANNED AND NOT FOR HUMAN HABITATION (NO HANDICAP ACCESS IS REQUIRED).

**GENERAL NOTES**

- THESE MODIFICATIONS HAVE BEEN DESIGNED IN ACCORDANCE WITH THE GOVERNING PROVISIONS OF THE TELECOMMUNICATIONS INDUSTRY STANDARD TIA-222-H. MATERIALS AND SERVICES PROVIDED BY THE CONTRACTOR SHALL CONFORM TO THE ABOVE MENTIONED CODES.
- CONTRACTOR SHALL TAKE ALL PRECAUTIONS NECESSARY TO PREVENT DAMAGE TO EXISTING STRUCTURES. ANY DAMAGE TO EXISTING STRUCTURES AS A RESULT OF THE CONTRACTOR'S WORK OR FROM DAMAGE DUE TO OTHER CAUSES SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE TO THE SATISFACTION OF THE OWNER.
- CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS BEFORE BEGINNING WORK, ORDERING MATERIAL, AND PREPARING OF SHOP DRAWINGS. ANY DISCREPANCIES BETWEEN FIELD CONDITIONS AND THE CONTRACT DOCUMENTS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ENGINEER. IF THE CONTRACTOR DISCOVERS ANY EXISTING CONDITIONS THAT ARE NOT REPRESENTED ON THESE DRAWINGS, OR ANY CONDITIONS THAT WOULD INTERFERE WITH THE INSTALLATION OF THE MODIFICATIONS, NOTIFY THE ENGINEER IMMEDIATELY.
- IT IS ASSUMED THAT ANY STRUCTURAL MODIFICATION WORK SPECIFIED ON THESE PLANS WILL BE ACCOMPLISHED BY KNOWLEDGEABLE WORKMEN WITH TOWER CONSTRUCTION EXPERIENCE.
- THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE WORK AND SHALL BE SOLELY RESPONSIBLE FOR ALL CONSTRUCTION METHODS, MEANS, TECHNIQUES, SEQUENCES, AND PROCEDURES.
- ALL CONSTRUCTION MEANS AND METHODS, INCLUDING BUT NOT LIMITED TO, ERECTION PLANS, RIGGING PLANS, CLIMBING PLANS, AND RESCUE PLANS SHALL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR RESPONSIBLE FOR THE EXECUTION OF THE WORK CONTAINED HEREIN AND SHALL MEET ANSII/TIA-322 (LATEST EDITION), OSHA, AND GENERAL INDUSTRY STANDARDS. ALL RIGGING PLANS SHALL ADHERE TO ANSII/TIA-322 (LATEST EDITION) INCLUDING THE REQUIRED INVOLVEMENT OF A QUALIFIED ENGINEER FOR CLASS IV CONSTRUCTION.
- THE CONTRACTOR IS SOLELY RESPONSIBLE FOR INITIATING, MAINTAINING, AND SUPERVISING ALL SAFETY PROGRAMS IN ACCORDANCE WITH APPLICABLE SAFETY CODES.
- WORK SHALL ONLY BE PERFORMED DURING CALM DRY DAYS (WINDS LESS THAN 30-MPH). THE STRUCTURE SHOWN ON THE DRAWINGS IS STRUCTURALLY SOUND ONLY IN THE COMPLETED FORM. THE

CONTRACTOR SHALL BE RESPONSIBLE FOR THE STRENGTH AND STABILITY OF THE STRUCTURE DURING ERECTION. CONTRACTOR SHALL PROVIDE TEMPORARY SUPPORT, SHORING, BRACING AND ANY OTHER STRUCTURAL SYSTEMS AS REQUIRED TO RESIST ALL FORCES THAT MAY OCCUR DURING HANDLING AND ERECTION UNTIL THE STRUCTURE IS FULLY COMPLETED. TEMPORARY SUPPORTS, BRACING AND OTHER STRUCTURAL SYSTEMS REQUIRED DURING CONSTRUCTION SHALL REMAIN THE CONTRACTOR'S PROPERTY AFTER THEIR USE.

- ALL INSTALLATIONS PERFORMED ON THIS STRUCTURE SHALL BE COMPLETED IN ACCORDANCE WITH THE GOVERNING PROVISIONS OF THE STANDARD FOR INSTALLATION, ALTERATION AND MAINTENANCE OF ANTENNA SUPPORTING STRUCTURES AND ANTENNAS, ANSII/TIA-322.
- CONTRACTOR SHALL SECURE SITE BACK TO EXISTING CONDITION UNDER SUPERVISION OF OWNER. ALL FENCE, STONE, GEOFABRIC, GROUNDING, AND SURROUNDING GRADE SHALL BE REPLACED AND REPAIRED AS REQUIRED TO ACHIEVE OWNER APPROVAL. POSITIVE DRAINAGE AWAY FROM TOWER SITE SHALL BE MAINTAINED.
- CONNECTIONS BETWEEN ITEMS SUPPORTED BY THE STRUCTURE AND THE STRUCTURE NOT SPECIFICALLY DETAILED IN THE CONTRACT DOCUMENTS ARE THE RESPONSIBILITY OF THE CONTRACTOR. SUCH CONNECTIONS SHALL BE DESIGNED, COORDINATED AND INSPECTED BY A PROFESSIONAL STRUCTURAL ENGINEER LICENSED IN THE STATE OF THE PROJECT. SUBMIT SIGNED AND SEALED CALCULATIONS DURING SHOP DRAWING REVIEW.
- DO NOT SCALE DRAWINGS.
- DO NOT USE THESE DRAWINGS FOR ANY OTHER SITE.
- ALL MATERIAL UTILIZED FOR THIS PROJECT MUST BE NEW AND FREE OF ANY DEFECTS. ANY MATERIAL SUBSTITUTIONS, INCLUDING BUT NOT LIMITED TO ALTERED SIZE AND/OR STRENGTHS, MUST BE APPROVED BY THE OWNER AND ENGINEER IN WRITING.
- THE MOUNT UNDER NO CIRCUMSTANCES SHOULD BE USED AS A TIE OFF POINT.

**STRUCTURAL STEEL**

- DESIGN, DETAILING, FABRICATION AND ERECTION OF STRUCTURAL STEEL SHALL CONFORM TO THE FOLLOWING PUBLICATIONS EXCEPT AS SPECIFICALLY INDICATED IN THE CONTRACT DOCUMENTS.
  - AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC) MANUAL OF STEEL CONSTRUCTION (15TH EDITION)
  - SPECIFICATION FOR STRUCTURAL JOINTS USING ASTM A325 OR A490 BOLTS
  - AISC CODE OF STANDARD PRACTICE
- STRUCTURAL STEEL SHALL CONFORM TO THE FOLLOWING UNLESS OTHERWISE SHOWN:
 

CHANNELS, ANGLES, PLATES, ETC.	ASTM A36 (GR 36)
STEEL PIPE	ASTM A53 (GR 35)
BOLTS	ASTM A325
NUTS	ASTM A563
LOCK WASHERS	LOCKING STRUCTURAL GRADE
- ALL SUBSTITUTIONS PROPOSED BY THE CONTRACTOR SHALL BE APPROVED IN WRITING BY THE ENGINEER. CONTRACTOR SHALL PROVIDE DOCUMENTATION TO ENGINEER FOR VERIFYING THE SUBSTITUTE IS SUITABLE FOR USE AND MEETS ORIGINAL DESIGN CRITERIA. DIFFERENCES FROM THE ORIGINAL DESIGN, INCLUDING MAINTENANCE, REPAIR AND REPLACEMENT, SHALL BE NOTED. ESTIMATES OF COSTS/CREDITS ASSOCIATED WITH THE SUBSTITUTION (INCLUDING RE-DESIGN COSTS AND COSTS TO SUB-CONTRACTORS) SHALL BE PROVIDED TO THE ENGINEER. CONTRACTOR SHALL PROVIDE ADDITIONAL DOCUMENTATION AND/OR SPECIFICATIONS TO THE ENGINEER AS REQUESTED.
- PROVIDE STRUCTURAL STEEL SHOP DRAWINGS TO ENGINEER FOR APPROVAL PRIOR TO FABRICATION.
  - SUBMIT SHOP DRAWINGS TO  
PETER.ALBANO@COLLIERSENGINEERING.COM
  - PROVIDE MASER CONSULTING PROJECT # AND MASER CONSULTING PROJECT ENGINEER CONTACT IN THE BODY OF THE EMAIL.
- DRILL NO HOLES IN ANY NEW OR EXISTING STRUCTURAL STEEL MEMBERS OTHER THAN THOSE SHOWN ON STRUCTURAL DRAWINGS WITHOUT THE APPROVAL OF THE ENGINEER OF RECORD.
- GALVANIZED ASTM A325 BOLTS SHALL NOT BE REUSED.
- ALL NEW STEEL SHALL BE HOT BE DIPPED GALVANIZED FOR FULL WEATHER PROTECTION. IN ADDITION ALL NEW STEEL SHALL BE PAINTED TO MATCH EXISTING STEEL. CONTRACTOR SHALL OBTAIN WRITTEN PERMISSION TO PROTECT STEEL BY ANY OTHER MEANS.
- CONTRACTOR SHALL PROTECT CUT ENDS OF ALL FIELD-CUT STEEL WITH TWO (2) COATS OF COLD GALVANIZATION (ZINGA OR ZINC COTE).
- ALL BOLT ASSEMBLIES FOR STRUCTURAL MEMBERS REPRESENTED IN THIS DRAWING REQUIRE LOCKING DEVICES TO BE INSTALLED IN ACCORDANCE WITH TIA-222-H SECTION 4.9.2 REQUIREMENTS.
- WHERE CONNECTIONS ARE NOT FULLY DETAILED ON THESE DRAWINGS, FABRICATOR SHALL DESIGN CONNECTIONS TO RESIST LOADS AND FORCES WHERE SHOWN ON DRAWINGS AND AS OUTLINED IN SPECIFICATIONS.
- FOR MEMBERS BEING REPLACED, PROVIDE NEW BOLTS AND MATCH EXISTING SIZE AND GRADE. MAINTAIN AISC REQUIREMENTS FOR MINIMUM BOLT DISTANCE AND SPACING.


- ALL PROPOSED AND/OR REPLACED BOLTS SHALL BE OF SUFFICIENT LENGTH SUCH THAT THE END OF THE BOLT IS AT LEAST FLUSH WITH THE FACE OF THE NUT. IT IS NOT PERMITTED FOR THE BOLT END TO BE BELOW THE FACE OF THE NUT AFTER TIGHTENING IS COMPLETED.
- GALVANIZED ASTM A325 BOLTS SHALL NOT BE REUSED.
- ALL EXISTING PAINTED/GALVANIZED SURFACES DAMAGED DURING REHAB INCLUDING AREAS UNDER STIFFENER PLATES SHALL BE WIRE BRUSHED CLEAN, REPAIRED BY COLD GALVANIZING (ZINGA OR ZINC COTE), AND REPAINTED TO MATCH THE EXISTING FINISH (IF APPLICABLE).
- ALL HOLES IN STEEL MEMBERS SHALL BE SIZED 1/16" LARGER THAN THE BOLT DIAMETER. STANDARD HOLES SHALL BE USED UNLESS NOTED OTHERWISE.

**WELDING NOTES**

- ALL WELDING SHALL BE DONE IN ACCORDANCE WITH AWS D1.0 (LATEST EDITION). THIS SHALL INCLUDE A CERTIFIED WELD INSPECTION (CWI) FOR ACCEPTANCE OR REJECTION OF ALL WELDING OPERATIONS, PRE, DURING, AND POST INSTALLATION, USING THE ACCEPTANCE CRITERIA OF AWS D1.1.
- CONTRACTOR IS RESPONSIBLE FOR COMMISSIONING A THIRD PARTY CERTIFIED WELD INSPECTOR (CWI) THROUGHOUT THE ENTIRETY OF THE PROJECT. A PASSING CWI REPORT SHALL BE PROVIDED TO THE ENGINEER UPON COMPLETION OF THE PROJECT.
- THE CERTIFIED WELD INSPECTOR SHALL INDICATE, IN A WRITTEN CWI REPORT, THAT ALL WELDING OPERATIONS, DURING, AND POST INSTALLATION WERE CONDUCTED IN ACCORDANCE WITH AWS D1.1 WITH PHOTOGRAPHS AND DOCUMENTATION SUPPORTING THE ACCEPTANCE OR REJECTION OF ALL WELDING. ALL CWI WELD INSPECTION DOCUMENTATION AND PHOTOS SHALL BE SUBMITTED DURING THE PMI.
- IN CASES WHERE A WELD IS SPECIFIED BETWEEN TWO MEMBERS IN WHICH THERE IS A GAP IN BETWEEN, THE WELD IS TO BE BUILT-UP SUCH THAT THE SIZE OF WELD ON THE MEMBER IS EQUAL TO THAT SHOWN IN THE DRAWINGS.
- OXY FUEL GAS WELDING OR BRAZING IS STRICTLY PROHIBITED. SPECIFICALLY, NO TORCH CUTTING IS PERMITTED ON SITE. ALL HOLES SHALL BE CUT WITH A GRINDER.
- CONTRACTOR SHALL EXERCISE CAUTION WHEN WELDING A GALVANIZED SURFACE.


BOLT SCHEDULE (IN.)				
BOLT DIAMETER	STANDARD HOLE	SHORT SLOT	MIN. EDGE DISTANCE	SPACING
1/2	9/16	9/16 x 11/16	7/8	1 1/2
5/8	11/16	11/16 x 7/8	1 1/8	1 7/8
3/4	13/16	13/16 x 1	1 1/4	2 1/4
7/8	15/16	15/16 x 1 1/8	1 1/2	2 5/8
1	1 1/16	1 1/16 x 1 5/16	1 3/4	3

WORKABLE GAGES (IN.)	
LEG	GAGE
4	2 1/2
3 1/2	2
3	1 3/4
2 1/2	1 3/8
2	1 1/8



**TYP. BOLT ASSEMBLY**

- NOTES:**
- ALL DIMENSIONS REPRESENTED IN THE ABOVE TABLES ARE AISC MINIMUM REQUIREMENTS. CONTRACTOR SHALL VERIFY EXISTING CONDITIONS IN FIELD AND NOTIFY ENGINEER IF DISTANCES ARE LESS THAN THOSE PROVIDED.
  - THE DIMENSIONS PROVIDED ARE MINIMUM REQUIREMENTS. ACTUAL DIMENSIONS OF PROPOSED MEMBERS WITHIN THESE DRAWINGS MAY VARY FROM THE AISC MINIMUM REQUIREMENTS.
  - SHORT SLOT HOLES SHALL ONLY BE USED WHEN DEPICTED IN THE DRAWINGS
  - MATCH EXISTING GAGES WHEN APPLICABLE, UNLESS MINIMUM EDGE DISTANCES ARE COMPROMISED.

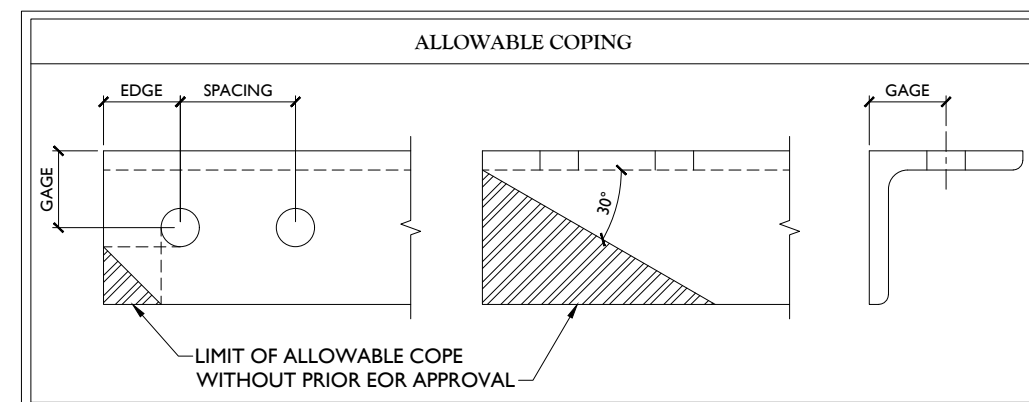

**MASER CONSULTING CONNECTICUT**  
 WILL BE KNOWN AS COLLIER ENGINEERING & DESIGN IN 2021  
 Customer Loyalty Through Client Satisfaction  
 www.maserconsulting.com  
 Office Locations:  
 ■ NEW JERSEY ■ NEW MEXICO  
 ■ NEW YORK ■ MARYLAND  
 ■ PENNSYLVANIA ■ GEORGIA  
 ■ VIRGINIA ■ TEXAS  
 ■ FLORIDA ■ TENNESSEE  
 ■ NORTH CAROLINA ■ COLORADO  
 ■ SOUTH CAROLINA  
 MASER CONSULTING, C.O.A. #: JPC000131  
 Copyright © 2022, Maser Consulting All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, discarded, distributed or relied upon for any other purpose without the express written consent of Maser Consulting.

**verizon**

**811**  
 PROTECT YOURSELF  
 ALL STATES REQUIRE NOTIFICATION OF EXCAVATIONS, DESIGNERS OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE  
 Know what's below.  
 Call before you dig.  
 FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT:  
 WWW.CALL811.COM

SCALE: AS SHOWN JOB NUMBER: 21777070A  

0	1/24/2022	ISSUED FOR CONSTRUCTION	SC	EA
REV	DATE	DESCRIPTION	DRAWN BY	CHECKED BY

**STATE OF CONNECTICUT**  
 ERIC T. ANDERSON  
 No. 32224  
 LICENSED PROFESSIONAL ENGINEER  
 01/25/2022


IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF THE RESPONSIBLE LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

**SITE NAME:**  
 MILFORD CT  
 467373  
 423 ORONOQUE RD  
 MILFORD, CT 06460  
 NEW HAVEN COUNTY

**STAMFORD OFFICE**  
 1055 Washington Boulevard  
 Stamford, CT 06901  
 Phone: 203.324.0800

SHEET TITLE:  
**MODIFICATION NOTES**

SHEET NUMBER:  
**SGN-1**

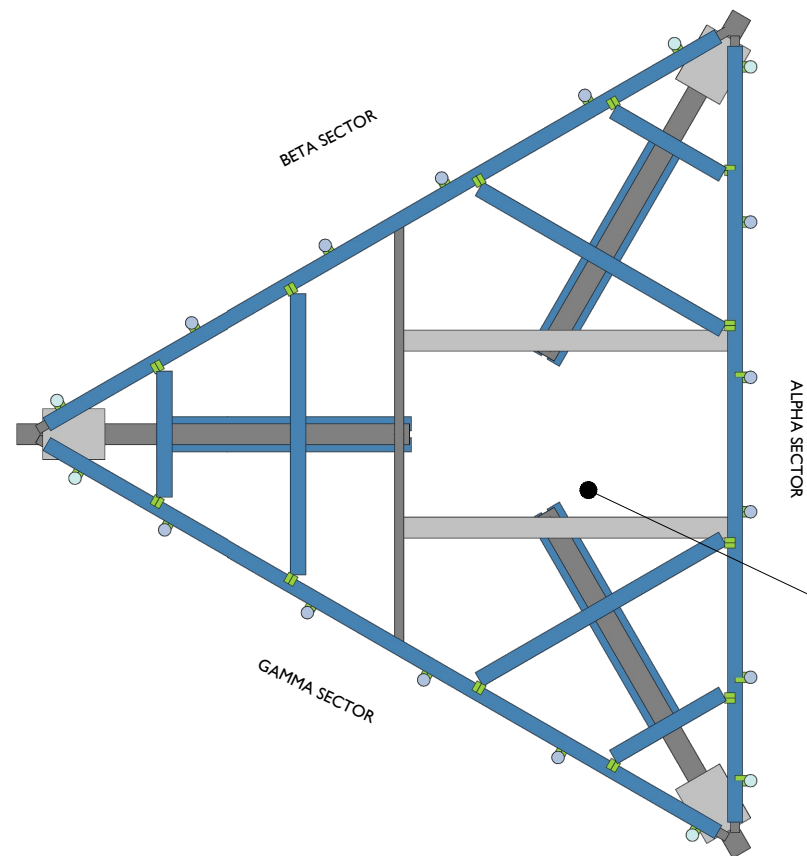

Existing Climbing Facility

Existing Climbing Facility



CLIMBING FACILITY PHOTO

1

CLIMBING FACILITY LOCATION

SCALE : N.T.S.

STRUCTURAL NOTES:

1. CONTRACTOR TO INSPECT CLIMBING FACILITIES AT SITE AND ENSURE THAT THE SAFETY CLIMB IS IN GOOD CONDITION, INSTALL NEW WIRE ROPE AND ENSURE IT DOES NOT OR WILL NOT INTERFERE WITH THE EXISTING OR PROPOSED MOUNT CONNECTIONS. CONTRACTOR SHALL INSTALL SAFETY CLIMB WIRE ROPE GUIDED AROUND MOUNT CONNECTIONS AS NEEDED.
2. INSTALL SHALL NOT CAUSE HARM TO THE STRUCTURE, CLIMBING FACILITY, SAFETY CLIMB, OR ANY SYSTEM INSTALLED ON THE STRUCTURE. TIMELY NOTICE AND DOCUMENTATION SHALL BE PROVIDED BY CONTRACTORS TO THE EOR (OF STRUCTURAL DESIGN) IF AN OBSTRUCTION WAS REQUIRED TO MEET THE RF SYSTEM DESIGN REQUIREMENTS AND PERFORMANCES.




WILL BE KNOWN AS COLLIER ENGINEERING & DESIGN IN 2021  
Customer Loyalty through Client Satisfaction  
www.maserconsulting.com

- Office Locations:
- NEW JERSEY
  - NEW MEXICO
  - NEW YORK
  - MARYLAND
  - PENNSYLVANIA
  - GEORGIA
  - VIRGINIA
  - TEXAS
  - FLORIDA
  - TENNESSEE
  - NORTH CAROLINA
  - COLORADO
  - SOUTH CAROLINA

MASER CONSULTING, C.O.A. #: JPC.0000131

Copyright © 2022, Maser Consulting All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting.



ALL STATES REQUIRE NOTIFICATION OF EXCAVATIONS, DESIGNERS OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE  
Know what's below.  
Call before you dig.  
FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT:  
WWW.CALL811.COM

SCALE: AS SHOWN JOB NUMBER: 21777070A


REV	DATE	DESCRIPTION	DRAWN BY	CHECKED BY
0	1/24/2022	ISSUED FOR CONSTRUCTION	SC	EA



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF THE RESPONSIBLE LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SITE NAME:

MILFORD CT  
467373  
423 ORONOQUE RD  
MILFORD, CT 06460  
NEW HAVEN COUNTY



STAMFORD OFFICE  
1055 Washington Boulevard  
Stamford, CT 06901  
Phone: 203.324.0800

SHEET TITLE:  
CLIMBING FACILITY DETAIL

SHEET NUMBER:  
SCF-1



**LEGEND:**

- PROPOSED
- RELOCATED
- EXISTING

MOUNT MODIFICATION SCHEDULE				
NO.	ELEVATION	QUANTITY	DESCRIPTION	NOTES
1		1	PROPOSED SUPPORT RAIL KIT (PART #: VZWSMART-PLK1)	RADIO AND/OR TME POSITIONS SHALL BE ADJUSTED VERTICALLY AS NEEDED IN ORDER TO ACHIEVE INSTALLATION OF HORIZONTAL AS SHOWN. EOR SHALL BE NOTIFIED IF EQUIPMENT NEEDS TO BE RELOCATED TO ANOTHER MOUNT PIPE. CONTRACTOR TO VERIFY THE LENGTH REQUIRED AND TRIM AS NECESSARY IN ACCORDANCE WITH THE 'STRUCTURAL STEEL' NOTES ON SHEET SGN-1.
2		1	PROPOSED PLATFORM SUPPORT RAIL BRACING KIT (PART #: VZWSMART-PLK2)	CONTRACTOR TO VERIFY THE LENGTH REQUIRED AND TRIM AS NECESSARY IN ACCORDANCE WITH THE 'STRUCTURAL STEEL' NOTES ON SHEET SGN-1
3	103'-0"	1	PROPOSED KICKER KIT (PART #: VZWSMART-PLK5)	CONTRACTOR TO VERIFY THE LENGTH REQUIRED AND TRIM AS NECESSARY IN ACCORDANCE WITH THE 'STRUCTURAL STEEL' NOTES ON SHEET SGN-1. CONNECT OTHER END OF KICKER KIT TO MONOPOLE COLLAR MOUNT ASSEMBLY (PART #: VZWSMART-PLK7).
4		6	RELOCATED MOUNT PIPE	CONNECT RELOCATED MOUNT PIPE TO EXISTING CHANNEL HORIZONTAL WITH (2) 1/2" DIA. U-BOLTS. CONNECT TO SUPPORT RAIL WITH CROSSOVER PLATES (PART #: VZWSMART-MSK1). CONTRACTOR TO DRILL HOLES AS REQUIRED.
5		3	PROPOSED 96" LONG, P2 1/2 STD (PART #: VZWSMART-P40-278X096)	CONNECT NEW MOUNT PIPE TO EXISTING CHANNEL HORIZONTAL WITH (2) 1/2" DIA. U-BOLTS.
6		9	PROPOSED 96" LONG, P2 STD (PART #: VZWSMART-P40-238X096)	CONNECT NEW MOUNT PIPE TO EXISTING CHANNEL HORIZONTAL WITH (2) 1/2" DIA. U-BOLTS. CONTRACTOR TO DRILL HOLES AS REQUIRED.

**NOTES:**

MOUNT MEMBERS NOT SHOWN FOR CLARITY U.N.O.  
 CONTRACTOR SHALL REMOVE EXISTING SUPPORT RAIL ANGLES, CORNER PIPES, MOUNT PIPES (EXCEPT RELOCATED MOUNT PIPES) AND INTERMEDIATE HORIZONTAL ANGLES PRIOR TO INSTALLATION OF PROPOSED MODIFICATION KITS.

**MASER CONSULTING CONNECTICUT**

WILL BE KNOWN AS COLLIER ENGINEERING & DESIGN IN 2021  
 Customer Loyalty through Client Satisfaction  
 www.maserconsulting.com  
 Office Locations:

■ NEW JERSEY	■ NEW MEXICO
■ NEW YORK	■ MARYLAND
■ PENNSYLVANIA	■ GEORGIA
■ VIRGINIA	■ TEXAS
■ FLORIDA	■ TENNESSEE
■ NORTH CAROLINA	■ COLORADO
■ SOUTH CAROLINA	

MASER CONSULTING, C.O.A. #: JPC.0000131  
 Copyright © 2022, Maser Consulting All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting.



**811** PROTECT YOURSELF

ALL STATES REQUIRE NOTIFICATION OF EXCAVATIONS, DESIGNERS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE

Know what's below.  
Call before you dig.

FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT:  
WWW.CALL811.COM

SCALE: AS SHOWN		JOB NUMBER: 21777070A	
REV	DATE	DESCRIPTION	CHECKED BY
0	1/24/2022	ISSUED FOR CONSTRUCTION	SC EA

STATE OF CONNECTICUT  
 ERIC I. ANDERSON  
 No. 32224  
 LICENSED PROFESSIONAL ENGINEER  
 01/25/2022


IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF THE RESPONSIBLE LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SITE NAME:  
  
 MILFORD CT  
 467373  
 423 ORONOQUE RD  
 MILFORD, CT 06460  
 NEW HAVEN COUNTY


STAMFORD OFFICE  
 1055 Washington Boulevard  
 Stamford, CT 06901  
 Phone: 203.324.0800

SHEET TITLE:  
 MODIFICATION DETAILS

SHEET NUMBER:  
 SS-1

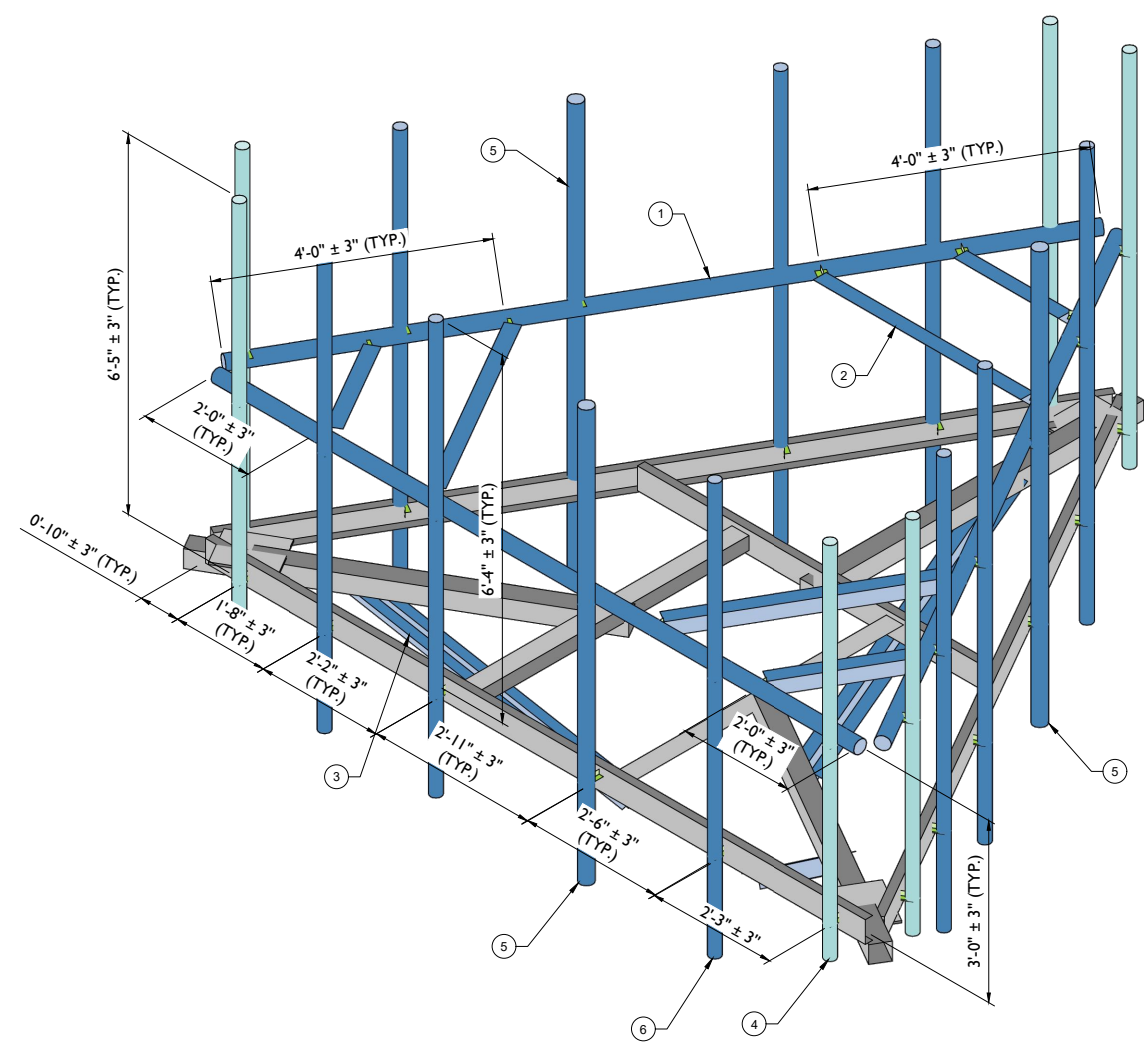

**1** PROPOSED ISOMETRIC VIEW  
 SCALE : N.T.S.

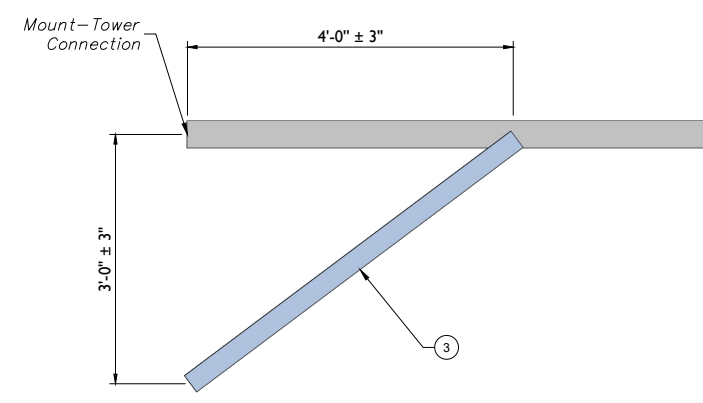

**2** PROPOSED SIDE ELEVATION VIEW (TYP. ALL SECTORS)  
 SCALE : N.T.S.





MOUNT PHOTO 1



MOUNT PHOTO 2



MOUNT PHOTO 3



MOUNT PHOTO 4

**MASER CONSULTING CONNECTICUT**  
 WILL BE KNOWN AS COLLIER ENGINEERING & DESIGN IN 2021  
 Customer Loyalty through Client Satisfaction  
 www.maserconsulting.com  
 Office Locations:

- NEW JERSEY
- NEW MEXICO
- NEW YORK
- MARYLAND
- PENNSYLVANIA
- GEORGIA
- VIRGINIA
- TEXAS
- FLORIDA
- TENNESSEE
- NORTH CAROLINA
- COLORADO
- SOUTH CAROLINA


MASER CONSULTING, C.O.A. #: JPC.0000131  
 Copyright © 2021 Maser Consulting All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting.



**811** PROTECT YOURSELF  
 ALL STATES REQUIRE NOTIFICATION OF EXCAVATIONS, DESIGNERS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE.  
 Know what's below. Call before you dig.  
 FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM

SCALE: AS SHOWN JOB NUMBER: 21777070A

REV	DATE	DESCRIPTION	DRAWN BY	CHECKED BY
0	1/24/2022	ISSUED FOR CONSTRUCTION	SC	EA




IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF THE RESPONSIBLE LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

**SITE NAME:**  
 MILFORD CT  
 467373  
 423 ORONOQUE RD  
 MILFORD, CT 06460  
 NEW HAVEN COUNTY


**MASER CONSULTING**  
 STAMFORD OFFICE  
 1055 Washington Boulevard  
 Stamford, CT 06901  
 Phone: 203.324.0800

SHEET TITLE:  
 MOUNT PHOTOS


SHEET NUMBER:  
 SS-2

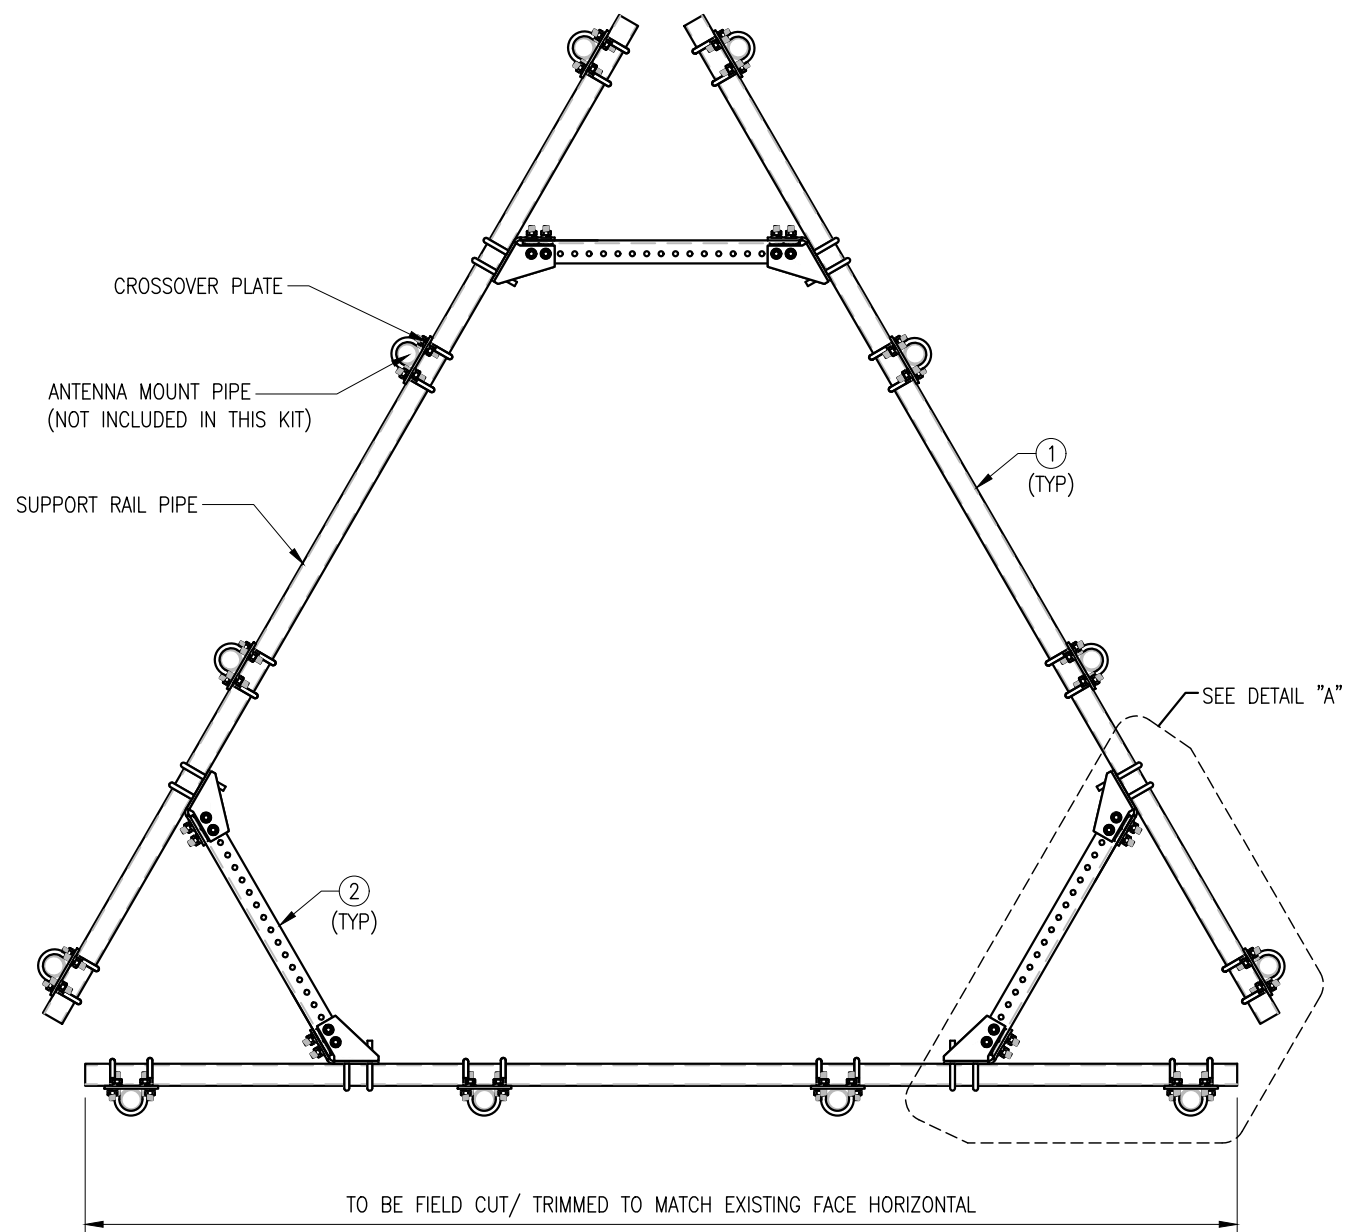


PLAN VIEW

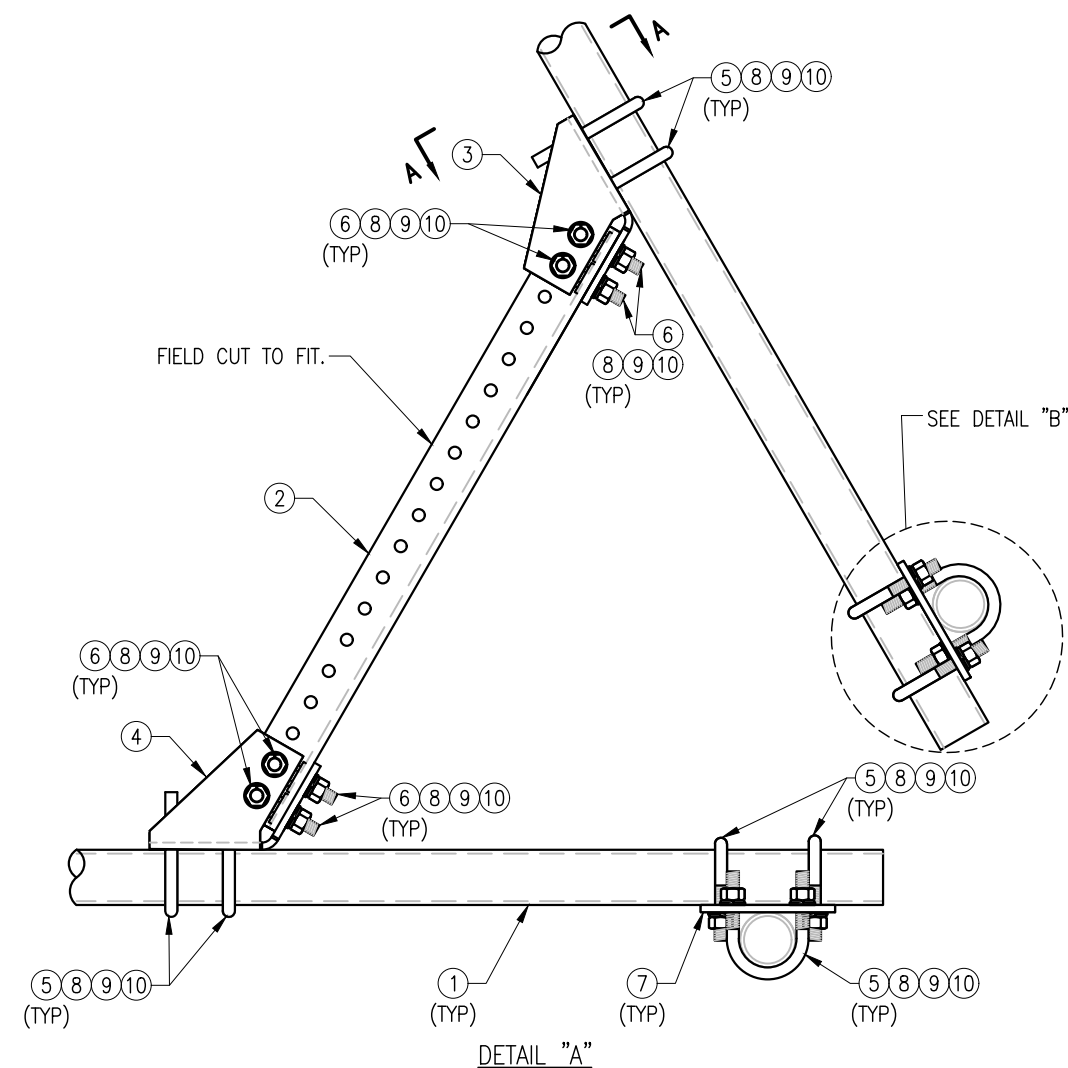

DETAIL "A"

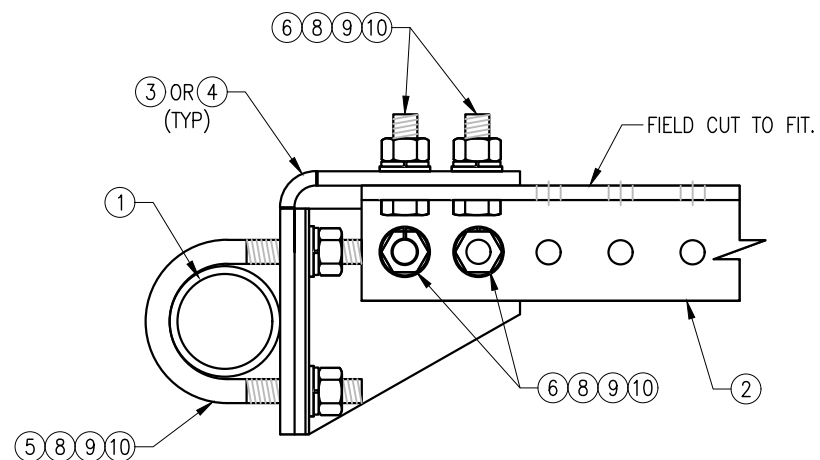

SECTION "A-A"

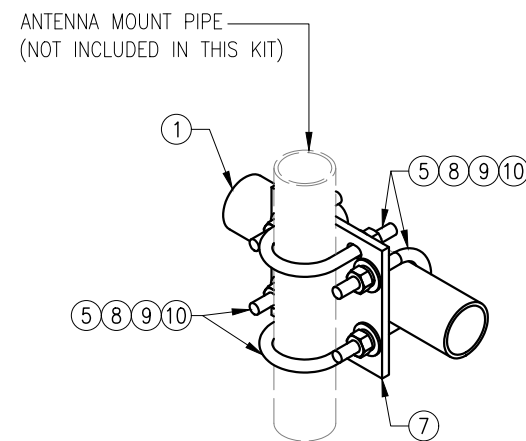

DETAIL "B"

NOTES:

1. HOT-DIPPED GALVANIZED PER ASTM A123.

VZW SMART-PLK1 (SUPPORT RAIL KIT)					
ITEM NO.	QTY.	PART NO.	DESCRIPTION	SHEET #	WT
1	3	PST2875-12.5	2.5" PST (2.875" O.D. X 0.203" THK.) X 12'-6" A53 GR-B	PLK1-F1	292
2	3	L33375-3	L 3" X 3" X 3/8" X 3'-0" A36	PLK1-F1	66
3	3	CBP-L	CORNER BENT PLATE BRACKET	PLK1-F2	28
4	3	CBP-R	CORNER BENT PLATE BRACKET	PLK1-F2	28
5	60	MS02-625-300-500	RU-BOLT 5/8" X 3" I.W. X 5" I.L. A36 (OR EQUIV.)	RBC-1	82
6	24	---	BOLT 5/8" X 2" A325	---	9
7	12	PL375-857	PL 3/8" X 8 1/2" X 7'-0" A36	PLK1-F3	77
8	144	FW-625	5/8" HDG USS FLAT WASHER	---	12
9	144	LW-625	5/8" HDG LOCK WASHER	---	3
10	144	NUT-625	5/8" HDG HEX NUT	---	17
GALVANIZED WT					504

DRAWN BY: H.R. CHECKED BY: HMA




REV.	DESCRIPTION	BY	DATE
△	FIRST ISSUE	H.R.	05/08/20
△			
△			
△			

SHEET TITLE:

VZWSMART-PLK1  
 SUPPORT RAIL KIT

SHEET NUMBER: VZWSMART-PLK1 REV #: 0



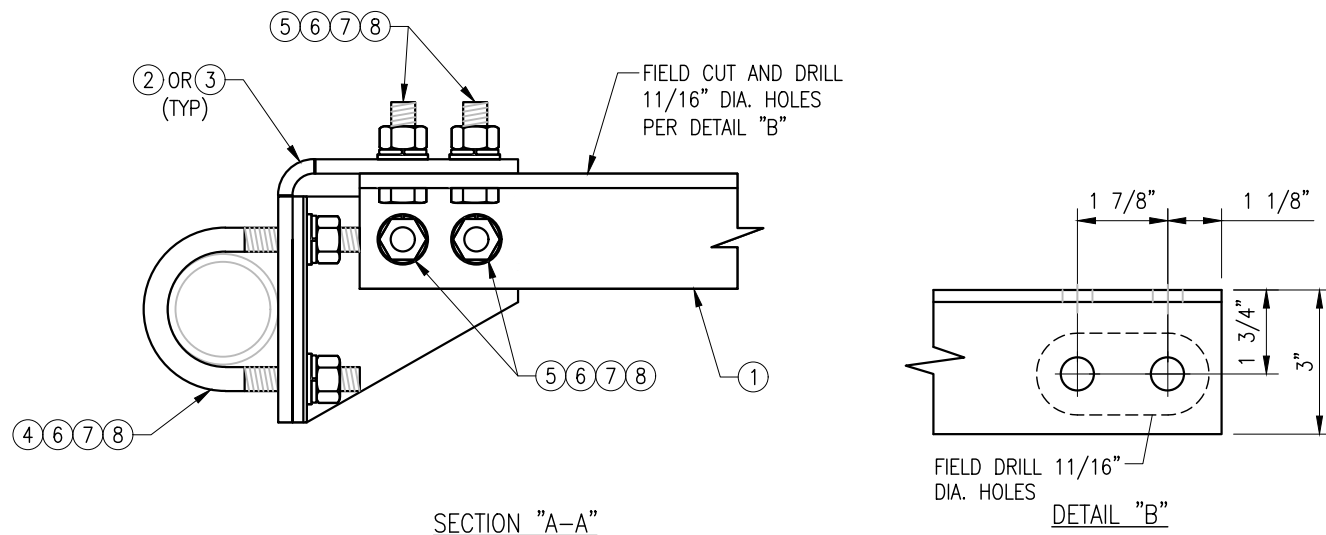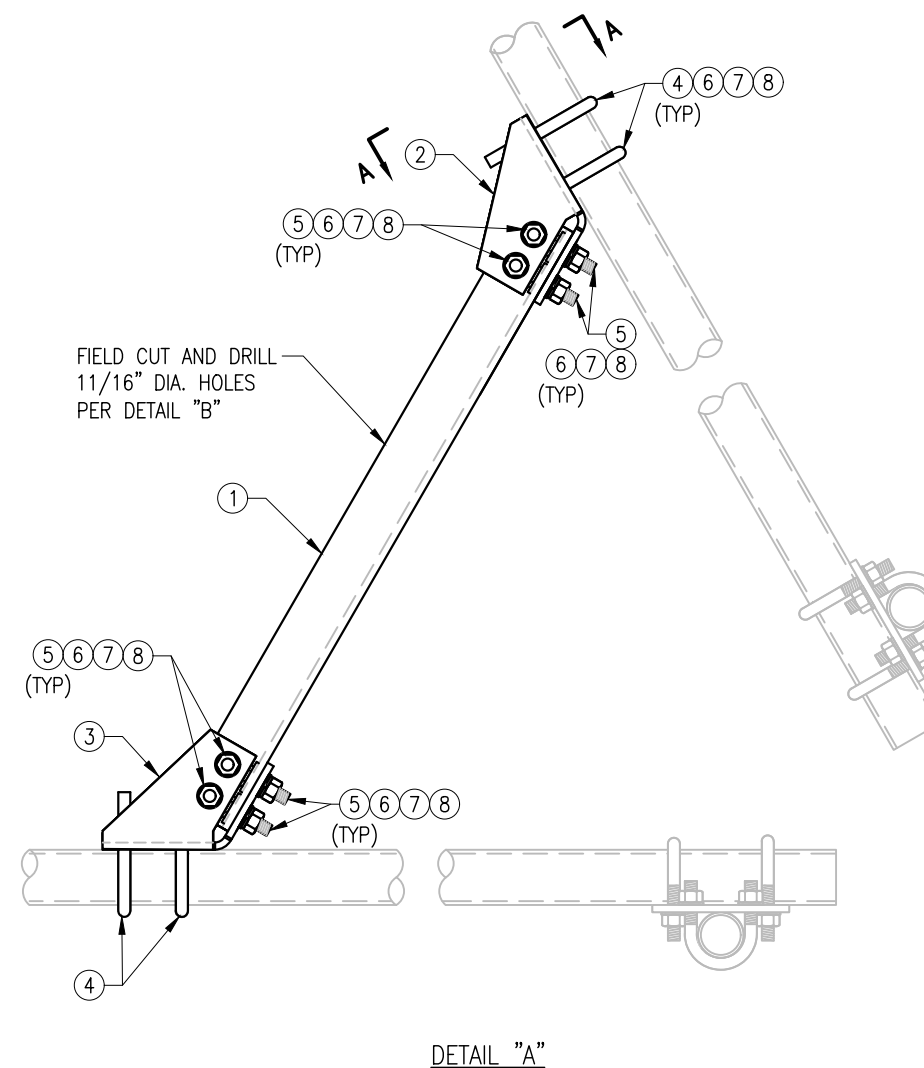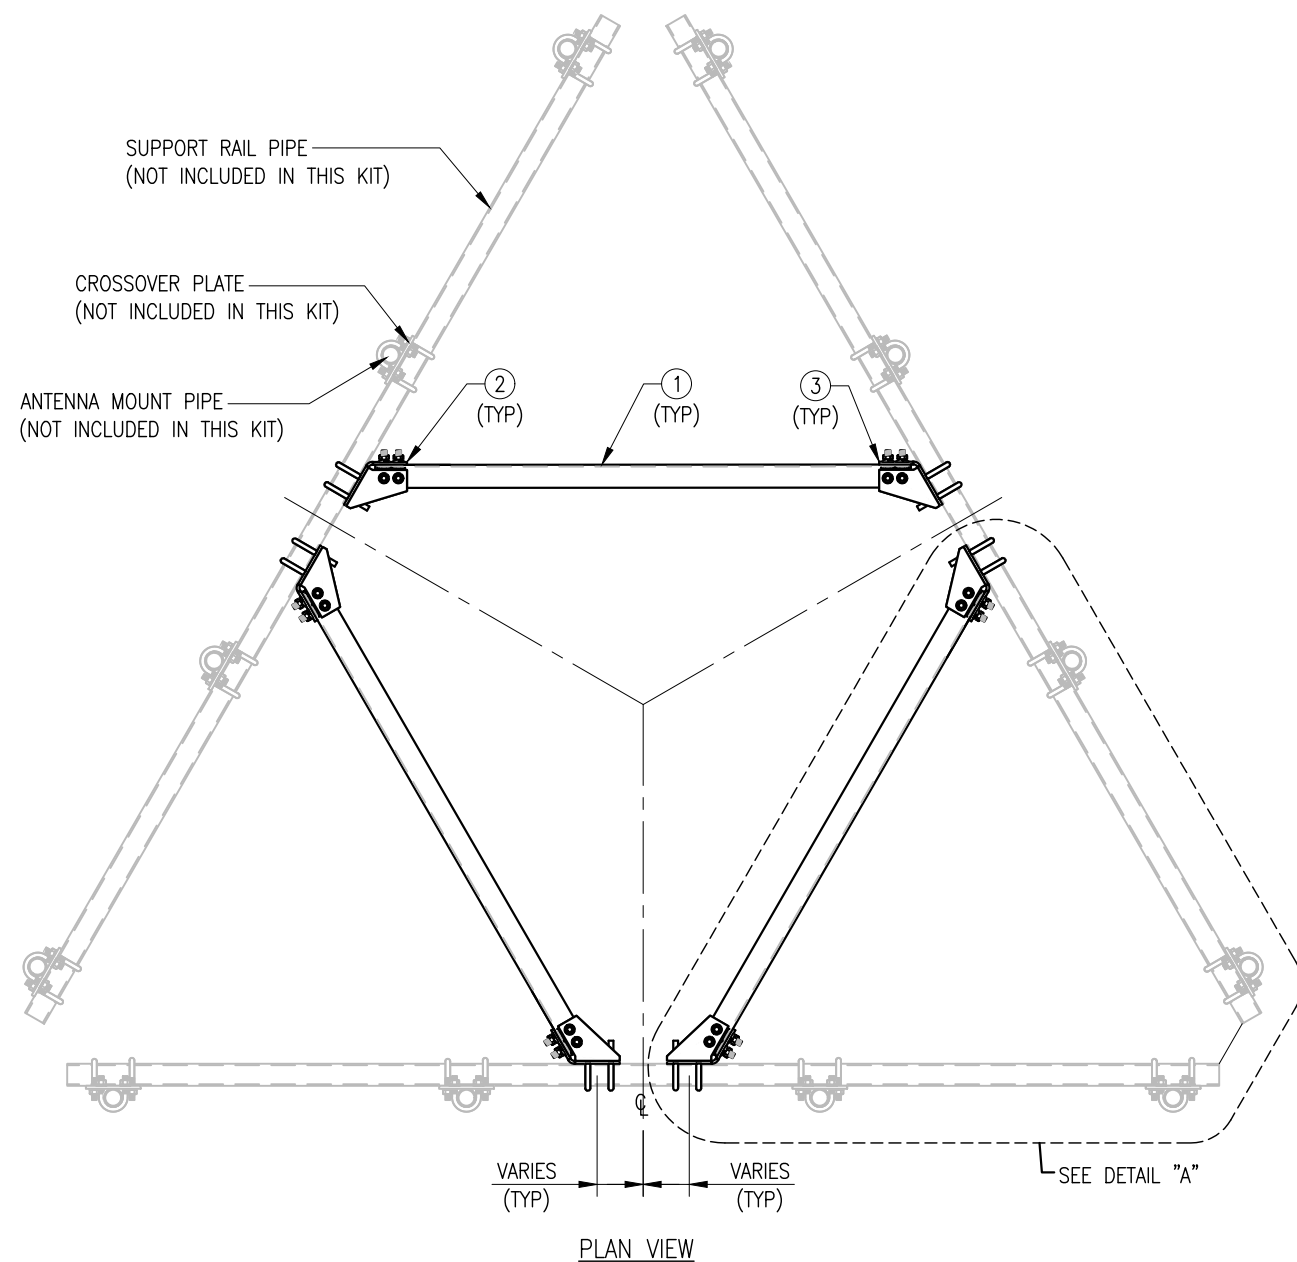

**NOTES:**

1. HOT-DIPPED GALVANIZED PER ASTM A123.

VZWSMART-PLK2 (PLATFORM SUPPORT RAIL BRACING)					
ITEM NO.	QTY.	PART NO.	DESCRIPTION	SHEET #	WT
1	3	L3325-8	L 3" X 3" X 1/4" X 8'-0" A36	PLK2-F1	120
2	3	CBP-L	CORNER BENT PLATE BRACKET	PLK2-F2	28
3	3	CBP-R	CORNER BENT PLATE BRACKET	PLK2-F2	28
4	12	MS02-625-300-500	RU-BOLT 5/8" X 3" I.W. X 5" I.L. A36 (OR EQUIV.)	RBC-1	16
5	24	---	BOLT 5/8" X 2" A325 W/HHN & LKW EA.	---	9
6	48	FW-625	5/8" HDG USS FLAT WASHER	---	4
7	48	LW-625	5/8" HDG LOCK WASHER	---	1
8	48	NUT-625	5/8" HDG HEX NUT	---	6
GALVANIZED WT					211






DRAWN BY: CH/HR CHECKED BY: HMA/KW

REV.	DESCRIPTION	BY	DATE
1	FIRST ISSUE	CH/HR	05/08/20

SHEET TITLE:  
**VZWSMART-PLK2  
 PLATFORM SUPPORT  
 RAIL KIT**

SHEET NUMBER: **VZWSMART-PLK2** REV #: **0**

NOTE:  
THE LOCATION OF KICKER AND EXISTING ANTENNA MOUNT SHOWN ON THE DRAWING IS FOR REPRESENTATION PURPOSE ONLY. SEE INSTALLATION DRAWINGS FOR ACTUAL INSTALLATION OF DETAILS.

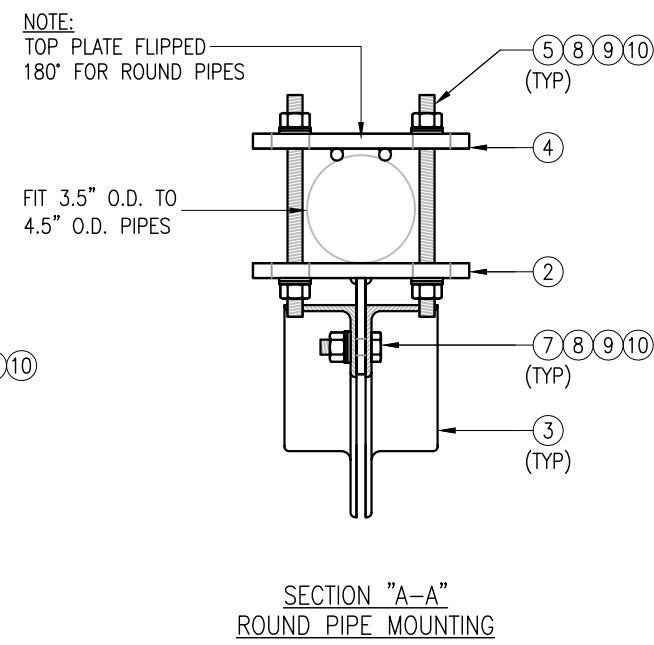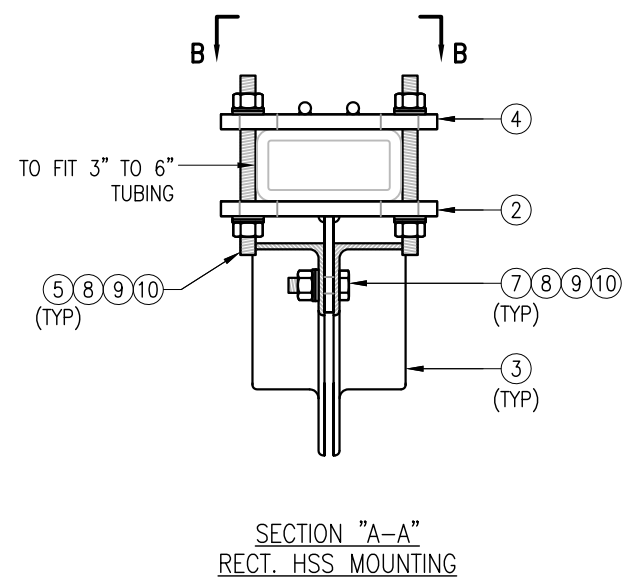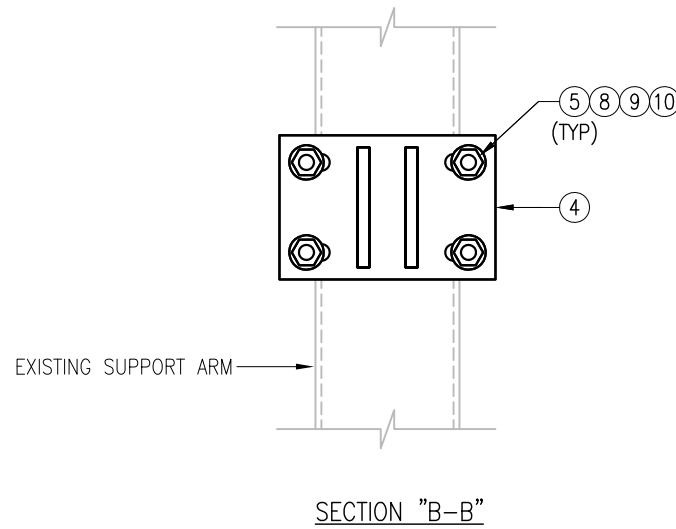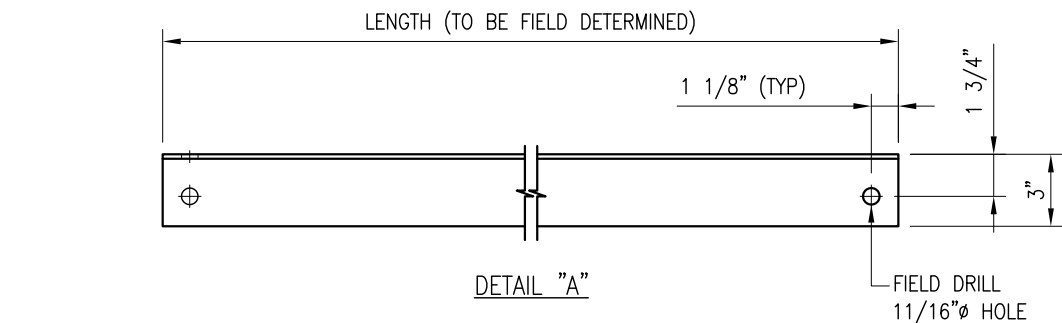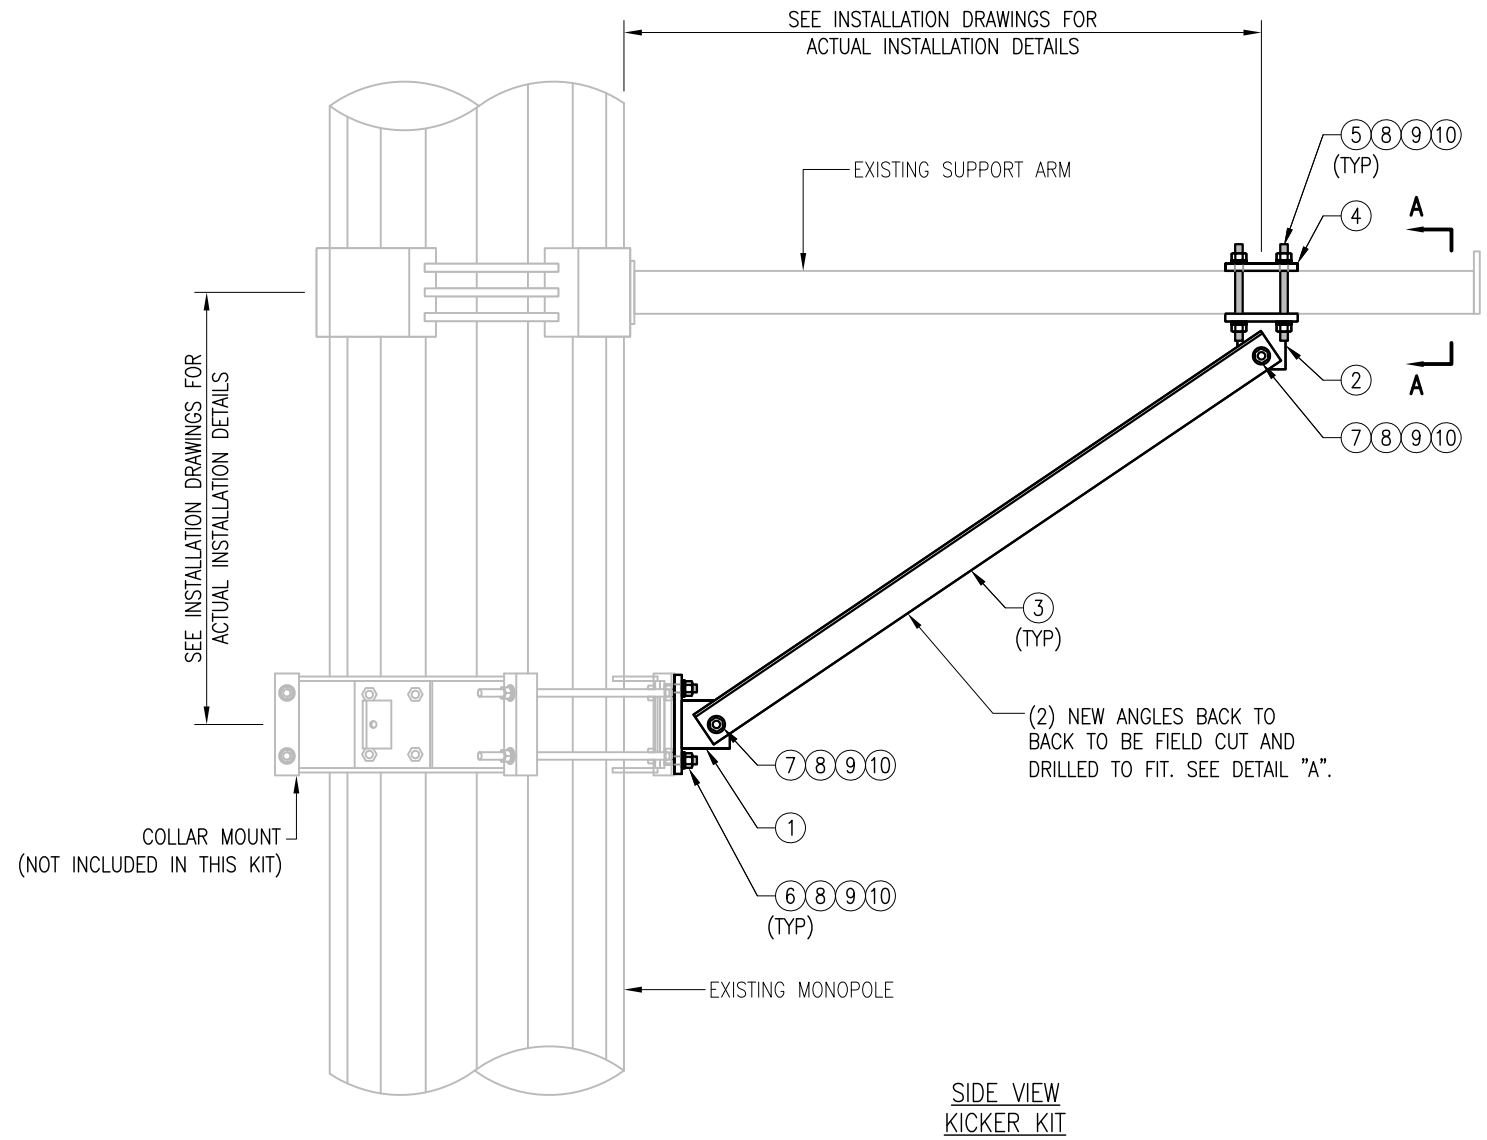

VZWSMART-PLK5 (KICKER KIT)					
ITEM NO.	QTY.	PART NO.	DESCRIPTION	SHEET #	WT
1	3	BRKW-XXX	BRACKET WELDMENT A36	PLK5-F3	43.8
2	3	BRKW-XXXX	BRACKET WELDMENT A36	PLK5-F2	35.7
3	6	L331875-8	L 3" X 3" X 3/16" X 8'-0" A36	PLK5-F4	182.9
4	3	PL-KI	PL 5/8" X 6" X 9" A36	PLK5-F1	29.0
5	12	---	THREADED ROD 5/8" DIA. X 1'-0" F1554-36 HDG	---	---
6	6	---	BOLT 5/8" X 2" A325	---	---
7	12	---	BOLT 5/8" X 2 1/2" A325	---	---
8	42	FW-625	5/8" HDG USS FLAT WASHER	---	3
9	42	LW-625	5/8" HDG LOCK WASHER	---	1
10	42	NUT-625	5/8" HDG HEX NUT	---	5
GALVANIZED WT					291

NOTES:  
1. ALL HOLES ARE 11/16" DIA. U.N.O  
2. HOT-DIPPED GALVANIZED PER ASTM A123.  
3. FIT UP TO 6" SQ. TUBING OR 4 1/2" O.D. PIPE

VzW  
**SMART Tool**<sup>®</sup>  
Vendor





DRAWN BY: MN CHECKED BY: HMA/KW

REV.	DESCRIPTION	BY	DATE
1	FIRST ISSUE	MN	05/08/20

SHEET TITLE:  
**VZWSMART-PLK5  
KICKER KIT**

SHEET NUMBER: **VZWSMART-PLK5** REV #: **0**

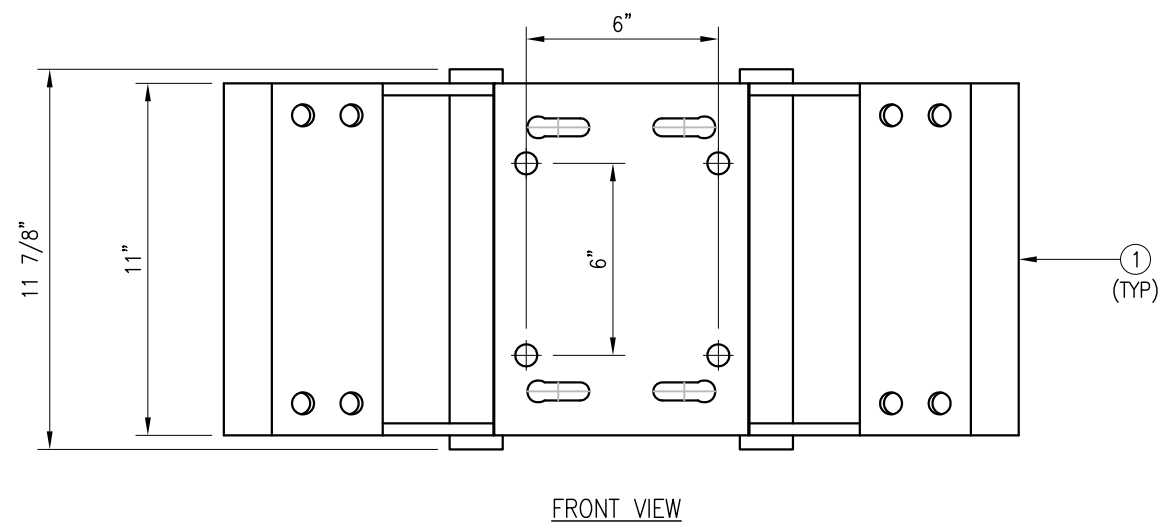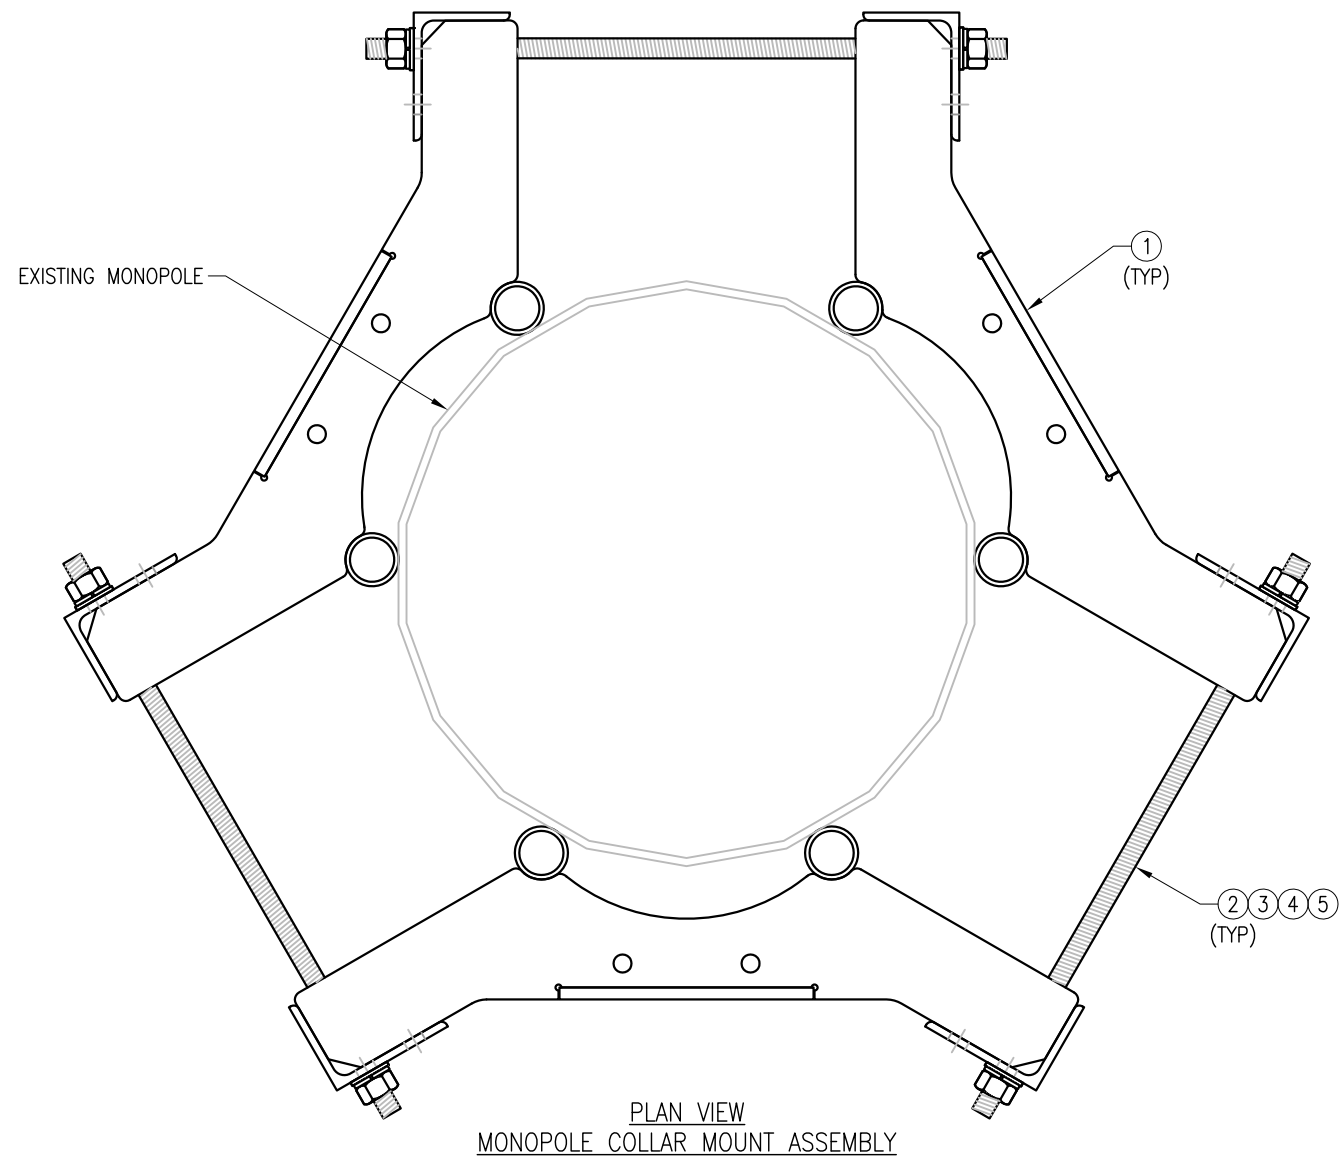

- NOTES:  
 1. FIT 12" TO 45" DIA MONOPOLE.  
 2. HOT-DIPPED GALVANIZED PER ASTM A123.

VZSMART-PLK7 (MONOPOLE COLLAR MOUNT ASSEMBLY)					
ITEM NO.	QTY.	PART NO.	DESCRIPTION	SHEET #	WT
1	3	CM-1245	COLLAR MOUNT ASSEMBLY	PLK7-F1	147
2	6	---	THREADED ROD 5/8" X 4'-0" A193-B7	---	
3	12	FW-625	5/8" HDG USS FLAT WASHER	---	1
4	12	LW-625	5/8" HDG LOCK WASHER	---	0
5	12	NUT-625	5/8" HDG HEX NUT	---	1
GALVANIZED WT					150

DRAWN BY: BT      CHECKED BY: HMA/KW


REV.	DESCRIPTION	BY	DATE
1	FIRST ISSUE	BT	05/11/20

SHEET TITLE:  
 VZSMART-PLK7  
 MONOPOLE COLLAR  
 MOUNT ASSEMBLY


SHEET NUMBER: VZSMART-PLK7      REV #: 0



FITS 2.375" O.D. AND 2.875" O.D.  
 VERTICAL PIPE.  
 (NOT INCLUDED IN THIS KIT)

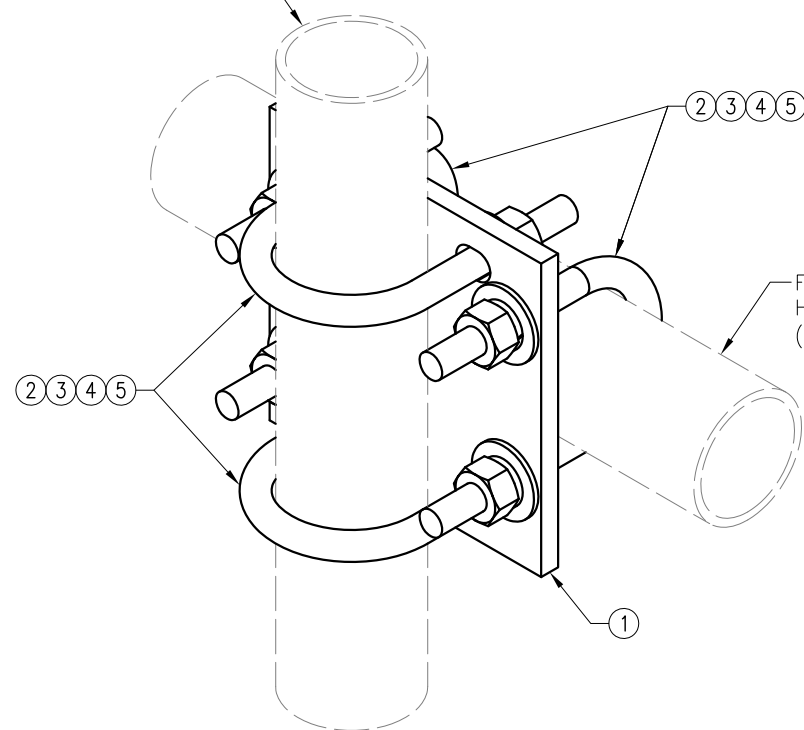

FITS 2.375" O.D. AND 2.875" O.D.  
 HORIZONTAL PIPE.  
 (NOT INCLUDED IN THIS KIT)

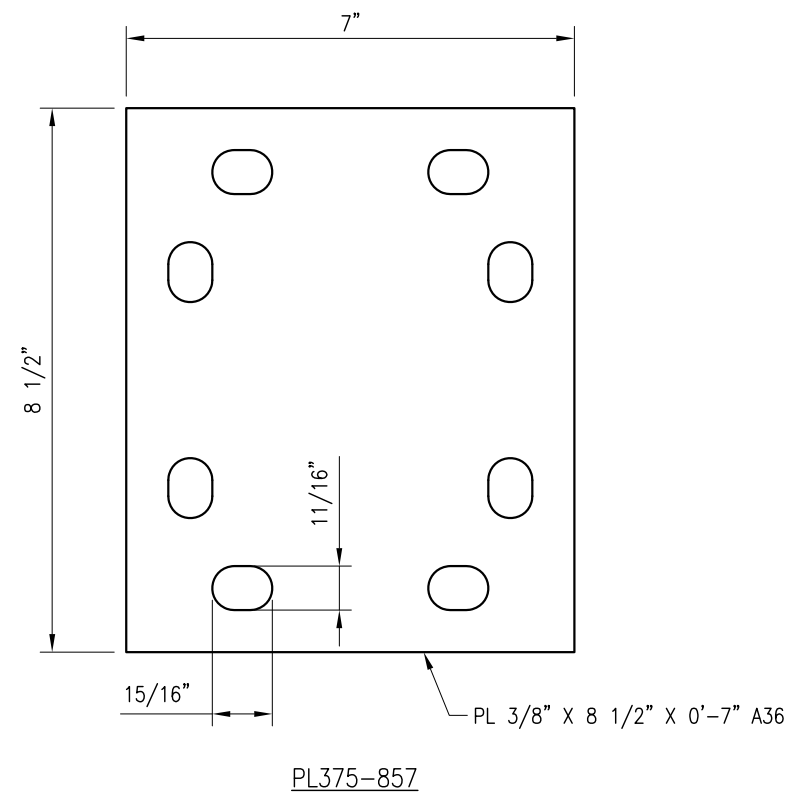

PL375-857

DRAWN BY: H.R. CHECKED BY: HMA

REV.	DESCRIPTION	BY	DATE
1	FIRST ISSUE	H.R.	05/08/20

SHEET TITLE:

VZSMART-MSK1  
 CROSSOVER PLATE


SHEET NUMBER: REV #:

VZSMART-MSK1 0

VZSMART-MSK1 (CROSSOVER PLATE)

ITEM NO.	QTY.	PART NO.	DESCRIPTION	SHEET #	WT
1	1	PL375-857	PL 3/8" X 8 1/2" X 0'-7" A36	MSK1-F1	6
2	4	MS02-625-300-500	RU-BOLT 5/8" X 3" I.W. X 5" I.L. A36 (OR EQUIV.)	RBC-1	5
3	8	FW-625	5/8" HDG USS FLAT WASHER	---	1
4	8	LW-625	5/8" HDG LOCK WASHER	---	0
5	8	NUT-625	5/8" HDG HEX NUT	---	1
GALVANIZED WT					14

NOTES:  
 1. HOT-DIPPED GALVANIZED PER ASTM A123.

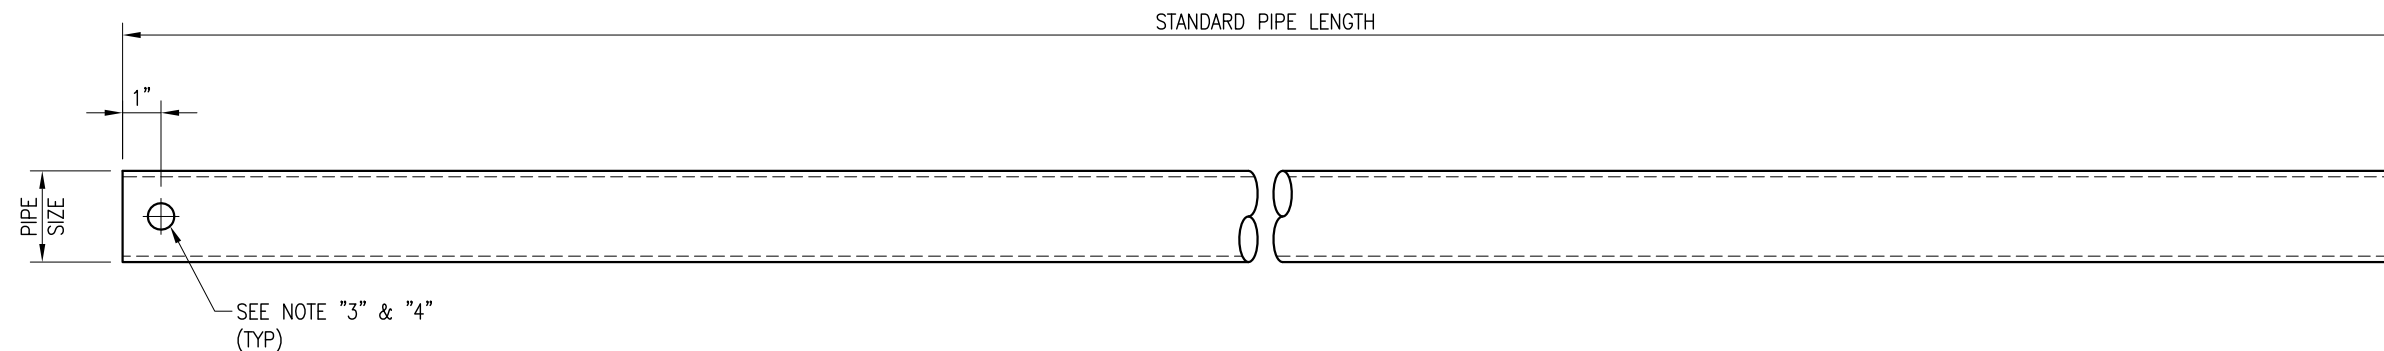

VZWSMART Standard Pipe		
VZWSMART Number	Size	Length
P40-238X048	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	48"
P40-238X072	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	72"
P40-238X096	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	96"
P40-238X120	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	120"
P40-238X126	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	126"
P40-238X150	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	150"
P40-238X174	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	174"
P40-278X048	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	48"
P40-278X072	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	72"
P40-278X096	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	96"
P40-278X120	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	120"
P40-278X126	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	126"
P40-278X150	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	150"
P40-278X174	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	174"
P40-312X048	PIPE 3 SCH40 (3.5" OD x 0.216" THK)	48"
P40-312X072	PIPE 3 SCH40 (3.5" OD x 0.216" THK)	72"
P40-312X126	PIPE 3 SCH40 (3.5" OD x 0.216" THK)	126"
P40-312X150	PIPE 3 SCH40 (3.5" OD x 0.216" THK)	150"
P40-312X174	PIPE 3 SCH40 (3.5" OD x 0.216" THK)	174"

**NOTE:**  
 APPROVED SMART KIT VENDORS ARE ALLOWED TO SUBSTITUTE AT THEIR DISCRETION  
 PIPES LISTED ON THIS PAGE FOR CUSTOM LENGTH COMPONENTS OF MATCHING SIZE.  
 SUBSTITUTIONS SHALL MEET THE ORIGINAL STRUCTURAL INTENT.

- NOTES:**
1. ALL PIPE GRADE A53-B OR BETTER.
  2. HOT-DIPPED GALVANIZED PER ASTM A123.
  3. ALL HOLES ARE 11/16" DIA. U.N.O
  4. HOLES MAY OR MAY NOT BE PRESENT, DEPEND UPON MANUFACTURE DISCRETION.
  5. ALL FIELD CUT AND DRILLED SURFACES SHALL BE REPAIRED WITH A MINIMUM OF TWO COATS OF ZINGA OR ZINC COTE PER ASTM A780 AND MANUFACTURER'S RECOMMENDATIONS.

DRAWN BY: BT      CHECKED BY: HMA/KW

REV.	DESCRIPTION	BY	DATE
1	FIRST ISSUE	BT	08/04/21

SHEET TITLE:

VZWSMART  
 STANDARD PIPE

SHEET NUMBER: VZWSMART-PIPE      REV #: 0

# Exhibit D

## **Structural Analysis Report**



Date: **May 13, 2021**

B+T Group  
1717 S. Boulder, Suite 300  
Tulsa, OK 74119  
(918) 587-4630

**Subject:** **Structural Analysis Report**

**Carrier Designation:** **Verizon Wireless Co-Locate**  
**Site Number:** 467373  
**Site Name:** MILFORD CT

**Crown Castle Designation:** **BU Number:** 806359  
**Site Name:** NHV 104 943122  
**JDE Job Number:** 644596  
**Work Order Number:** 1957393  
**Order Number:** 552661 Rev. 0

**Engineering Firm Designation:** **B+T Group Project Number:** 149269.003.01

**Site Data:** **423 Oronoque Road, Milford, New Haven County, CT**  
**Latitude 41° 14' 16.23", Longitude -73° 5' 10"**  
**100 Foot - Monopole**

B+T Group is pleased to submit this “**Structural Analysis Report**” to determine the structural integrity of the above-mentioned tower.

The purpose of the analysis is to determine acceptability of the tower stress level. Based on our analysis we have determined the tower stress level for the structure and foundation, under the following load case, to be:


LC7: Proposed Equipment Configuration

**Sufficient Capacity**

This analysis utilizes an ultimate 3-second gust wind speed of 125 mph as required by the 2018 Connecticut State Building Code. Applicable Standard references and design criteria are listed in Section 2 - Analysis Criteria.

Structural analysis prepared by: Angela Ashwood

Respectfully submitted by: B+T Engineering, Inc.  
COA: PEC.0001564, Exp: 10-02-2022

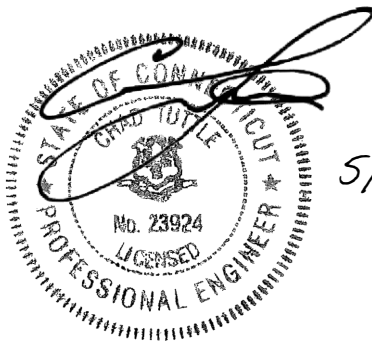

5/14/2021

Chad E. Tuttle, P.E.

## TABLE OF CONTENTS

### 1) INTRODUCTION

### 2) ANALYSIS CRITERIA

Table 1 - Proposed Equipment Configuration  
Table 2 - Other Considered Equipment

### 3) ANALYSIS PROCEDURE

Table 3 - Documents Provided  
3.1) Analysis Method  
3.2) Assumptions

### 4) ANALYSIS RESULTS

Table 4 - Section Capacity (Summary)  
Table 5 - Tower Component Stresses vs. Capacity - LC7  
4.1) Recommendations

### 5) APPENDIX A

tnxTower Output

### 6) APPENDIX B

Base Level Drawing

### 7) APPENDIX C

Additional Calculations

### 8) APPENDIX D

Modification Drawings



## 1) INTRODUCTION

This tower is a 100 ft. monopole designed by Valmont.

The tower was modified per reinforcement drawings by Paul J Ford and Company in July of 2008. Modification includes installation of new anchor rods with brackets.

## 2) ANALYSIS CRITERIA

<b>TIA-222 Revision:</b>	TIA-222-H
<b>Risk Category:</b>	II
<b>Wind Speed:</b>	125 mph
<b>Exposure Category:</b>	C
<b>Topographic Factor:</b>	1
<b>Ice Thickness:</b>	1.5 in
<b>Wind Speed with Ice:</b>	50 mph
<b>Service Wind Speed:</b>	60 mph

**Table 1 - Proposed Equipment Configuration**

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
105.0	105.0	3	JMA Wireless	91900314-02 (Dual Mount Antenna Bracket)	6 2 1	7/8 1-5/8 1/2
100.0	105.0	6	Decibel	DB846F65ZAXY		
		1	GPS	GPS_A		
		6	JMA Wireless	MX06FRO660-03		
		1	Raycap	RRFDC-3315-PF-48		
		3	Samsung Telecomm.	RFV01U-D1A		
		3	Samsung Telecomm.	RFV01U-D2A		
3	VZW	Sub6 Antenna - VZS01				
	100.0	1	--	Platform Mount [LP 713-1]		

**Table 2 - Other Considered Equipment**

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
95.0	95.0	1	Til-Tek	TA-2335-DAB-L-095	1	7/8
		1	--	Pipe Mount [PM 601-1]		
81.0	83.0	3	Ericsson	AIR 32 B2A B66AA_T-MOBILE	3	1-5/8
		3	Ericsson	AIR6449 B41_T-MOBILE		
		3	Ericsson	RADIO 4415 B25_TMO		
		3	Ericsson	RADIO 4449 B71 B85A_T-MOBILE		
		3	RFS Celwave	APXVAALL24_43-U-NA20_TMO		
	81.0	1	--	Platform Mount [LP 713-1]		
73.0	73.0	3	RFS Celwave	APXV18-206517S-C	6	1-5/8
48.0	48.0	1	Til-Tek	TA-2324-LHCP	1	1/2
		1	--	Side Arm Mount [SO 102-3]		

42.0	50.0	1	Trimble	57860-30	2	19/64
	49.0	1	Prodelin	1111		
	42.0	1	--	Side Arm Mount [SO 104-3]		

### 3) ANALYSIS PROCEDURE

**Table 3 - Documents Provided**

Document	Reference	Source
Tower Manufacturer Drawing	124531	CCI Sites
Tower Modification Drawing	2280914	CCI Sites
Post Modification Inspection	2419763	CCI Sites
Foundation Drawing	1256012	CCI Sites
Geotech Report	1256016	CCI Sites
Crown CAD Package	Date: 04/19/2021	CCI Sites

#### 3.1) Analysis Method

tnxTower (version 8.0.9.0), a commercially available analysis software package, was used to create a three-dimensional model of the tower and calculate member stresses for various loading cases. Selected output from the analysis is included in Appendix A. When applicable, Crown Castle has calculated and provided the effective area for panel antennas using approved methods following the intent of the TIA-222 standard.

#### 3.2) Assumptions

- 1) Tower and structures were maintained in accordance with the TIA-222 Standard.
- 2) The configuration of antennas, transmission cables, mounts and other appurtenances are as specified in Tables 1 and 2 and the referenced drawings.

This analysis may be affected if any assumptions are not valid or have been made in error. B+T Group should be notified to determine the effect on the structural integrity of the tower.

### 4) ANALYSIS RESULTS

**Table 4 - Section Capacity (Summary)**

Section No.	Elevation (ft)	Component Type	Size	Critical Element	P (K)	SF*P_allow (K)	% Capacity	Pass / Fail
L1	100 - 46.833	Pole	TP33.26x23.43x0.313	1	-14.217	1883.240	47.4	Pass
L2	46.833 - 0	Pole	TP41.3x31.68x0.375	2	-26.560	2890.890	66.2	Pass
							Summary	
						Pole (L2)	66.2	Pass
						Rating =	66.2	Pass

**Table 5 - Tower Component Stresses vs. Capacity - LC7**

Notes	Component	Elevation (ft)	% Capacity	Pass / Fail
1	Anchor Rods	Base	63.3	Pass
1	Base Plate	Base	25.3	Pass
1	Base Foundation (Structure)	Base	74.4	Pass
1	Base Foundation (Soil Interaction)	Base	26.3	Pass

<b>Structure Rating (max from all components) =</b>	<b>74.4%</b>
---	--------------

Notes:

- 1) See additional documentation in "Appendix C – Additional Calculations" for calculations supporting the % capacity consumed.
- 2) Rating per TIA-222-H Section 15.5

#### 4.1) Recommendations

The tower and its foundation have sufficient capacity to carry the proposed load configuration. No modifications are required at this time.

**APPENDIX A**

**TNXTOWER OUTPUT**

### DESIGNED APPURTENANCE LOADING

TYPE	ELEVATION	TYPE	ELEVATION
91900314	106	APXVAALL24_43-U-NA20_TMO w/ Mount Pipe	81
91900314	103		
Sub6 Antenna - VZS01 w/ Mount Pipe	100	AIR6449 B41_T-MOBILE w/ Mount Pipe	81
Sub6 Antenna - VZS01 w/ Mount Pipe	100		
Sub6 Antenna - VZS01 w/ Mount Pipe	100	AIR6449 B41_T-MOBILE w/ Mount Pipe	81
(2) MX06FRO660-03 w/ Mount Pipe	100		
(2) MX06FRO660-03 w/ Mount Pipe	100	AIR6449 B41_T-MOBILE w/ Mount Pipe	81
(2) MX06FRO660-03 w/ Mount Pipe	100		
RRFDC-3315-PF-48	100	RADIO 4449 B71 B85A_T-MOBILE	81
(3) RfV01U-D2A	100	RADIO 4449 B71 B85A_T-MOBILE	81
RfV01U-D1A	100	RADIO 4415 B25_TMO	81
(2) RfV01U-D1A	100	RADIO 4415 B25_TMO	81
GPS_A	100	RADIO 4415 B25_TMO	81
(3) 6' x 2" Mount Pipe	100	4' x 2" Pipe Mount	81
4' x 2" Pipe Mount	100	4' x 2" Pipe Mount	81
4' x 2" Pipe Mount	100	4' x 2" Pipe Mount	81
4' x 2" Pipe Mount	100	Platform Mount [LP 713-1]	81
(3) DB846F65ZAXY w/ Mount Pipe	100	APXV18-206517S-C w/ Mount Pipe	73
(3) DB846F65ZAXY w/ Mount Pipe	100	APXV18-206517S-C w/ Mount Pipe	73
Platform Mount [LP 713-1]	100	APXV18-206517S-C w/ Mount Pipe	73
TA-2335-DAB-L-095	95	Side Arm Mount [SO 102-3]	48
Pipe Mount [PM 601-1]	95	6' x 2" Mount Pipe	48
AIR 32 B2A B66AA_T-MOBILE w/ Mount Pipe	81	TA-2324-LHCP	48
		57860-30	42
AIR 32 B2A B66AA_T-MOBILE w/ Mount Pipe	81	6' x 2" Mount Pipe	42
AIR 32 B2A B66AA_T-MOBILE w/ Mount Pipe	81	6' x 2" Mount Pipe	42
		1111	42
APXVAALL24_43-U-NA20_TMO w/ Mount Pipe	81	Side Arm Mount [SO 104-3]	42
APXVAALL24_43-U-NA20_TMO w/ Mount Pipe	81		


### MATERIAL STRENGTH

GRADE	Fy	Fu	GRADE	Fy	Fu
A572-65	65 ksi	80 ksi			



### TOWER DESIGN NOTES

1. Tower is located in New Haven County, Connecticut.
2. Tower designed for Exposure C to the TIA-222-H Standard.
3. Tower designed for a 125 mph basic wind in accordance with the TIA-222-H Standard.
4. Tower is also designed for a 50 mph basic wind with 1.50 in ice. Ice is considered to increase in thickness with height.
5. Deflections are based upon a 60 mph wind.
6. Tower Risk Category II.
7. Topographic Category 1 with Crest Height of 0.000 ft
8. TOWER RATING: 66.2%

Section	1	2
Length (ft)	53.167	52.000
Number of Sides	12	12
Thickness (in)	0.315	0.375
Socket Length (ft)	5.167	31.680
Top Dia (in)	23.430	41.300
Bot Dia (in)	33.260	
Grade	A572-65	A572-65
Weight (K)	5.1	7.7
		12.8

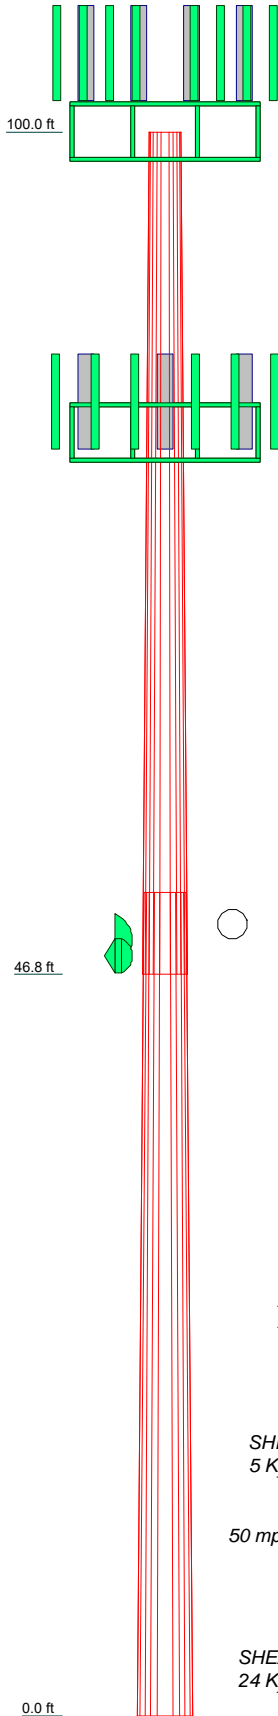

ALL REACTIONS ARE FACTORED



**B+T Group**  
1717 S. Boulder, Suite 300  
Tulsa, OK 74119  
Phone: (918) 587-4630  
FAX: (918) 295-0265



Job:	149269.003.01 - NHV 104 943122, CT (BU# 80635)		
Project:			
Client:	Crown Castle	Drawn by:	Bhushan
Code:	TIA-222-H	Date:	05/07/21
Path:			App'd:
			Scale: NTS
			Dwg No. E-1

Vx

Vz

Mx

Mz

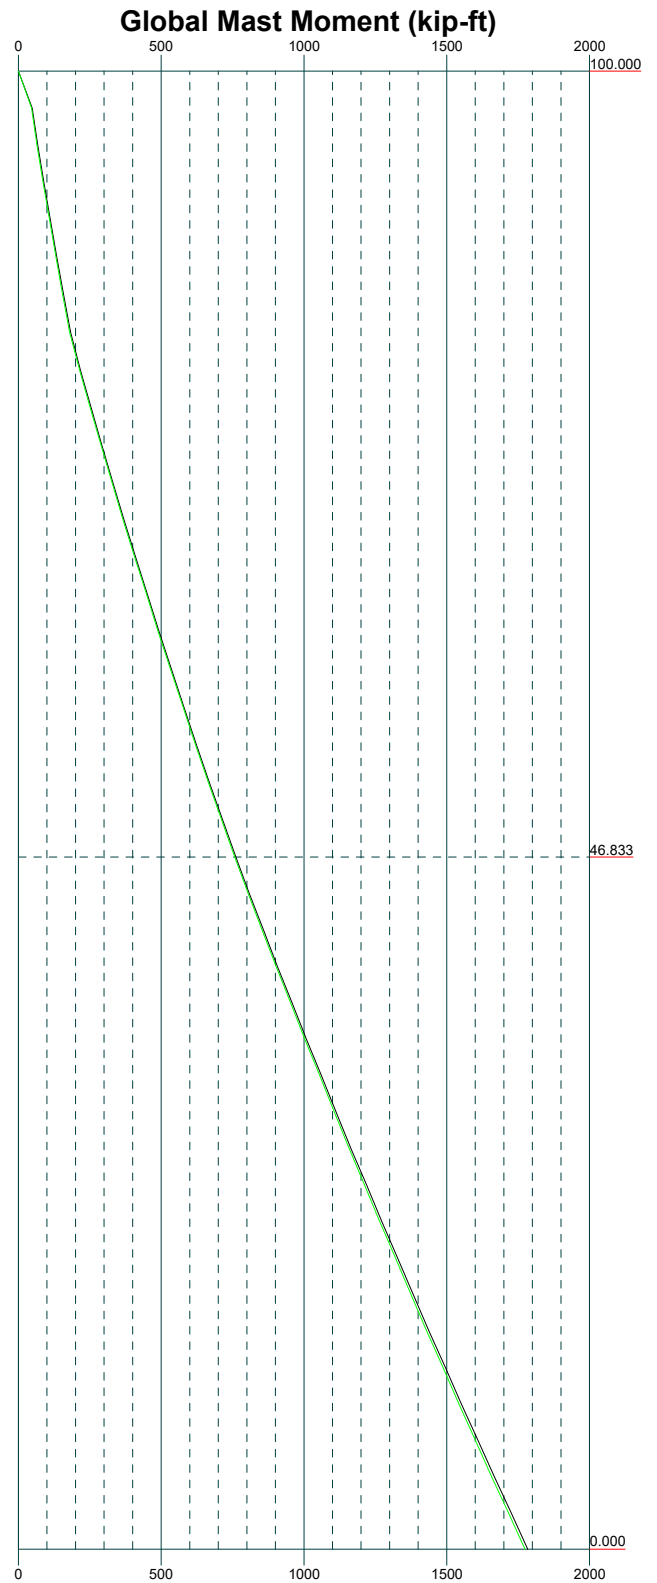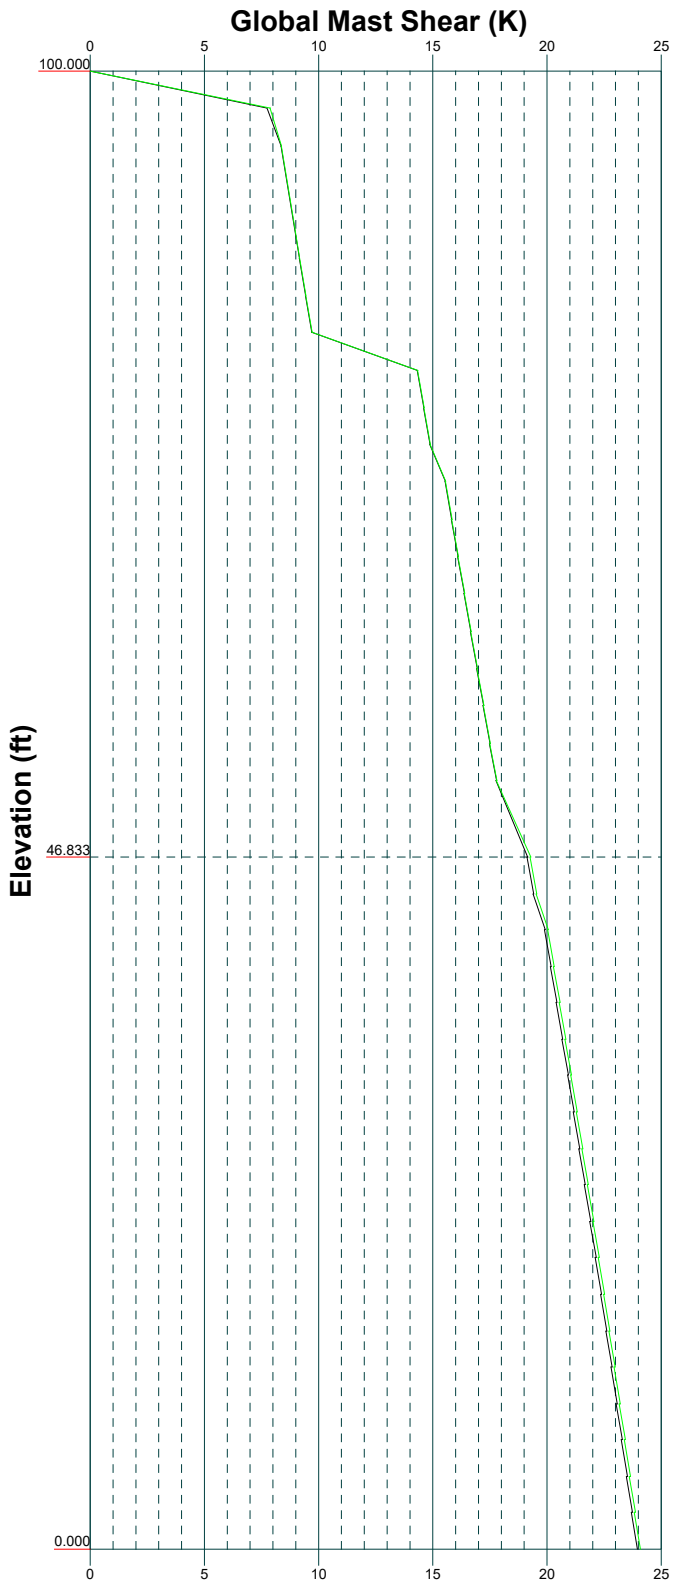



Elevation (ft)



**B+T Group**  
 1717 S. Boulder, Suite 300  
 Tulsa, OK 74119  
 Phone: (918) 587-4630  
 FAX: (918) 295-0265

Job: 149269.003.01 - NHV 104 943122, CT (BU# 80635)		
Project:		
Client: Crown Castle	Drawn by: Bhushan	App'd:
Code: TIA-222-H	Date: 05/07/21	Scale: NTS
Path:		Dwg No. E-4

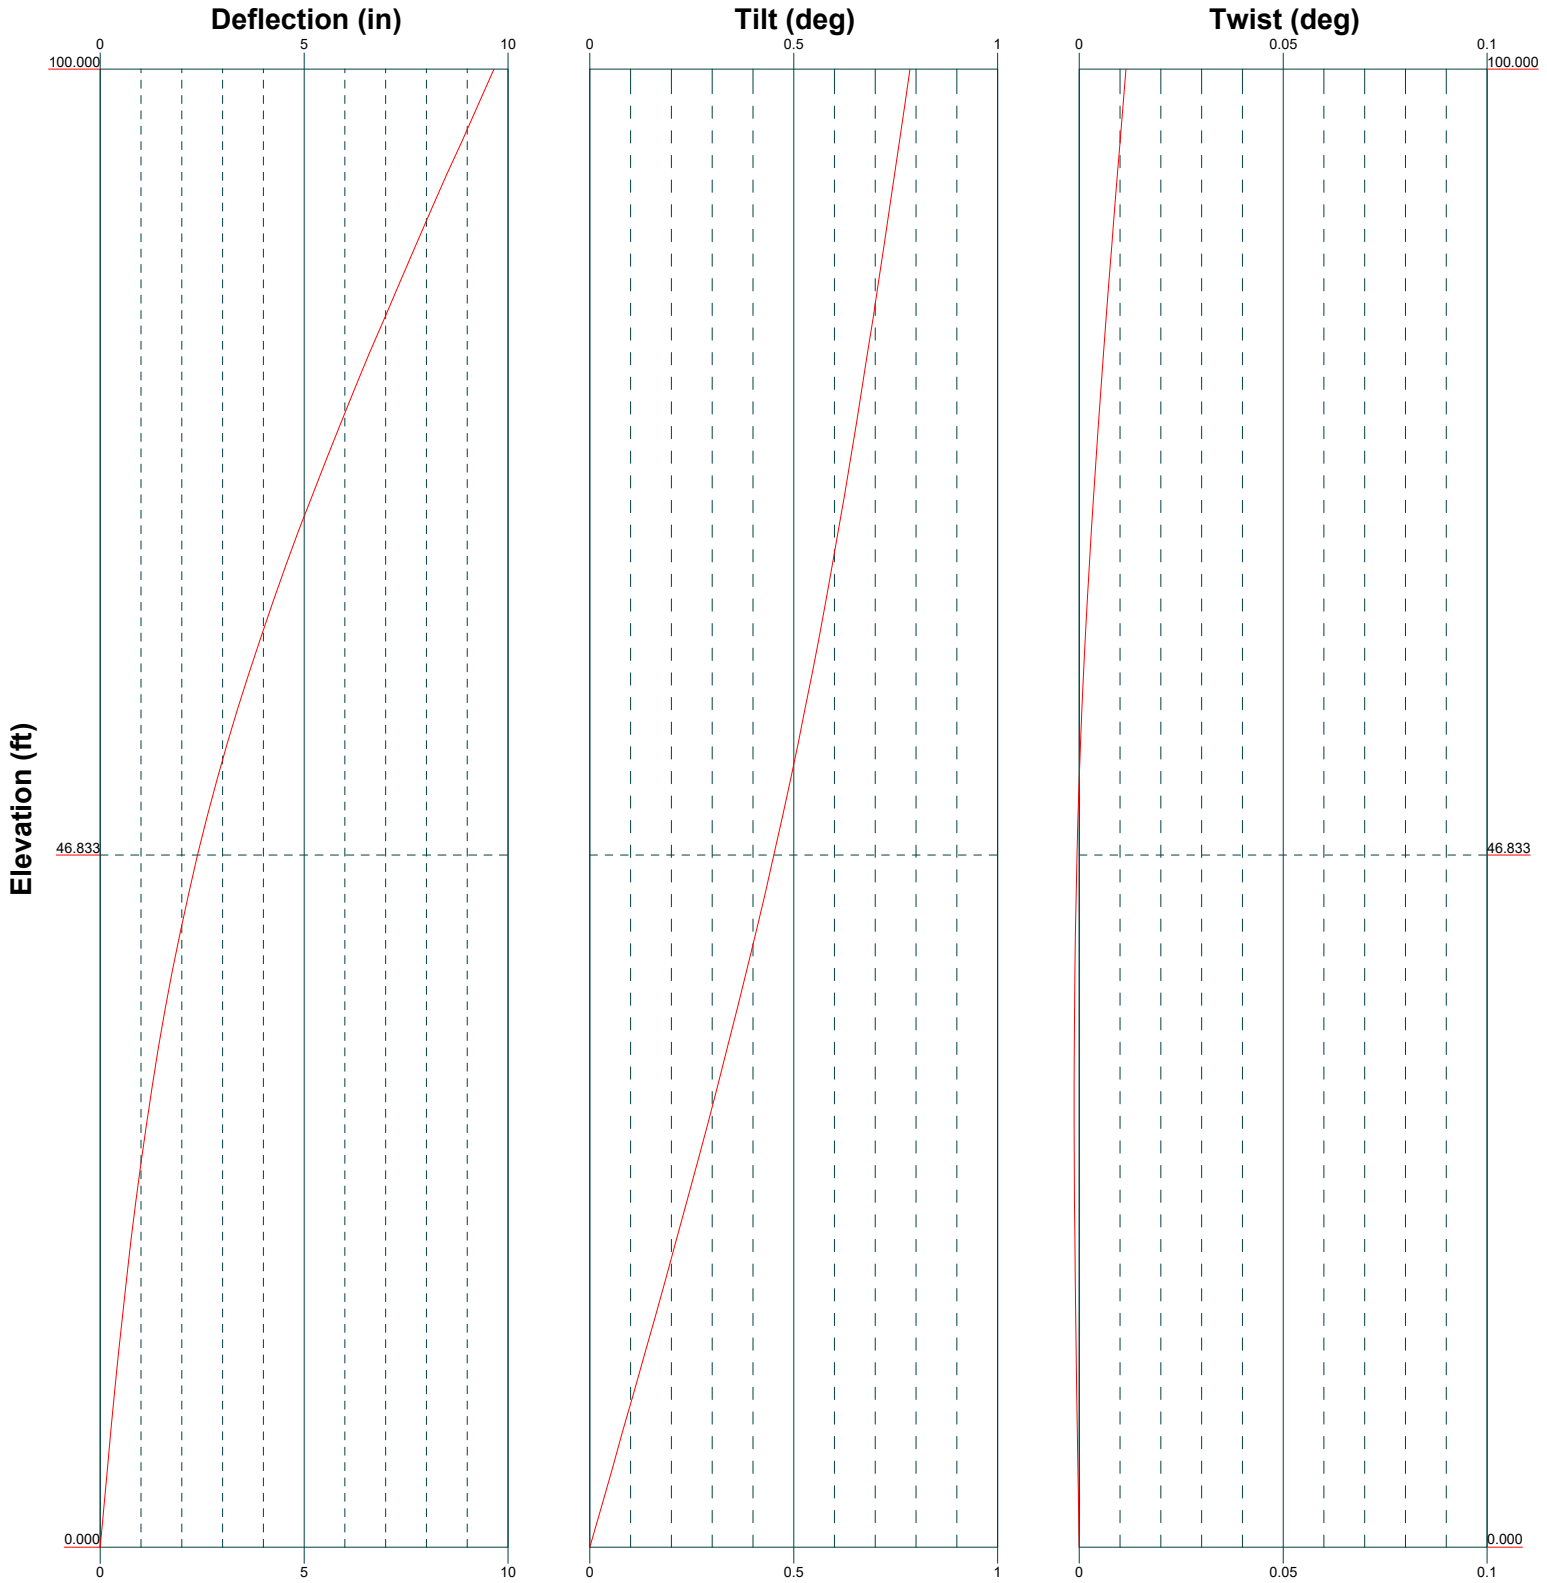



**B+T Group**  
 1717 S. Boulder, Suite 300  
 Tulsa, OK 74119  
 Phone: (918) 587-4630  
 FAX: (918) 295-0265


Job: <b>149269.003.01 - NHV 104 943122, CT (BU# 80635)</b>		
Project:		
Client: Crown Castle	Drawn by: Bhushan	App'd:
Code: TIA-222-H	Date: 05/07/21	Scale: NTS
Path:		Dwg No. E-5

# Feed Line Distribution Chart

## 0' - 100'

— Round   
 — Flat   
 — App In Face   
 — App Out Face   
 — Truss Leg

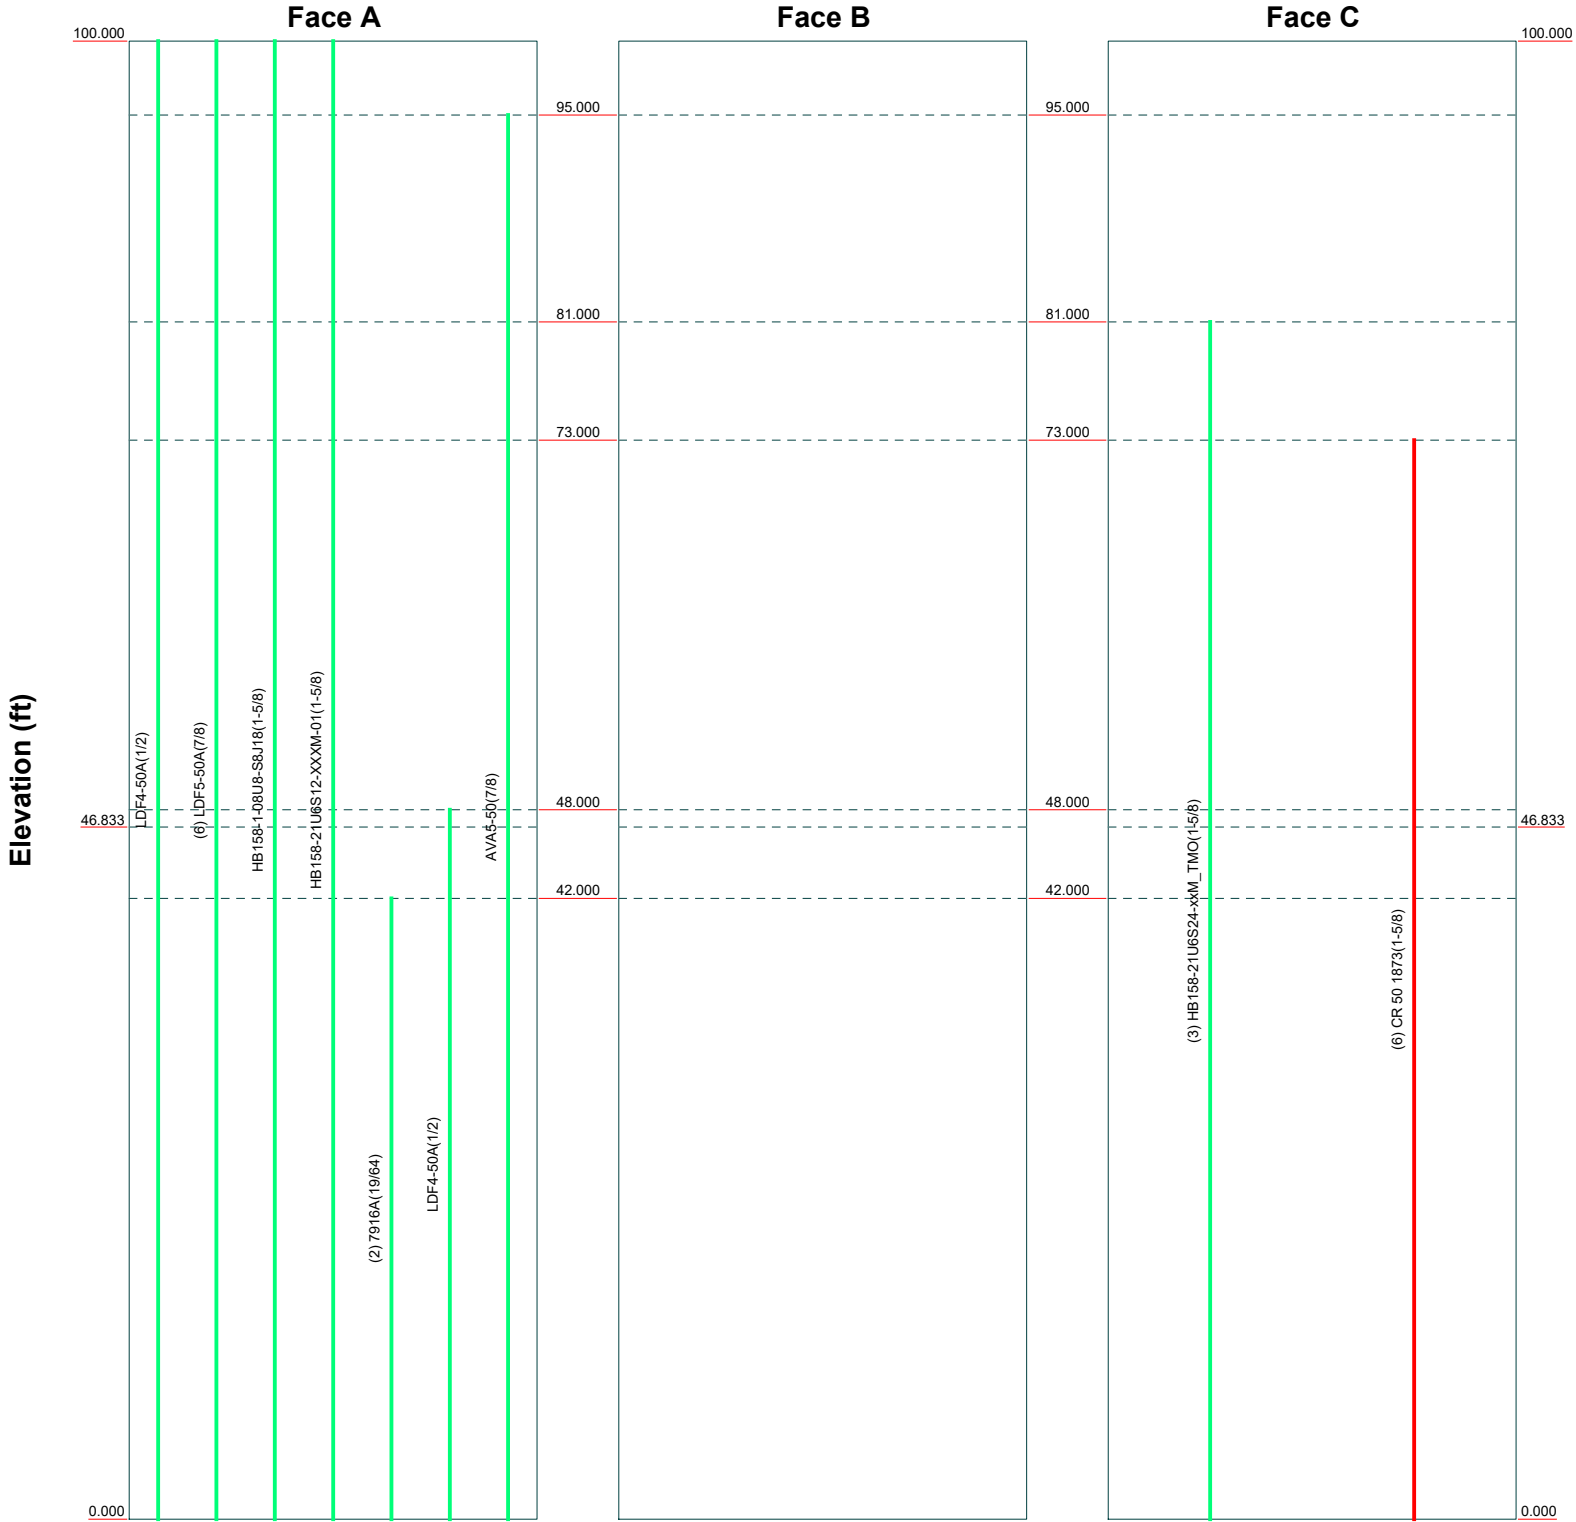


**B+T Group**  
 1717 S. Boulder, Suite 300  
 Tulsa, OK 74119  
 Phone: (918) 587-4630  
 FAX: (918) 295-0265

Job: <b>149269.003.01 - NHV 104 943122, CT (BU# 80635)</b>		
Project:		
Client: Crown Castle	Drawn by: Bhushan	App'd:
Code: TIA-222-H	Date: 05/07/21	Scale: NTS
Path:		Dwg No. E-7



<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b> 149269.003.01 - NHV 104 943122, CT (BU# 806359)	<b>Page</b> 1 of 15
	<b>Project</b>	<b>Date</b> 17:03:18 05/07/21
	<b>Client</b> Crown Castle	<b>Designed by</b> Bhushan

## Tower Input Data

The tower is a monopole.

This tower is designed using the TIA-222-H standard.

The following design criteria apply:

Tower is located in New Haven County, Connecticut.

Tower base elevation above sea level: 162.000 ft.

Basic wind speed of 125 mph.

Risk Category II.

Exposure Category C.

Simplified Topographic Factor Procedure for wind speed-up calculations is used.

Topographic Category: 1.

Crest Height: 0.000 ft.

Nominal ice thickness of 1.500 in.

Ice thickness is considered to increase with height.

Ice density of 56.000 pcf.

A wind speed of 50 mph is used in combination with ice.

Temperature drop of 50.000 °F.

Deflections calculated using a wind speed of 60 mph.

A non-linear (P-delta) analysis was used.

Pressures are calculated at each section.

Stress ratio used in pole design is 1.

Tower analysis based on target reliabilities in accordance with Annex S.

Load Modification Factors used:  $K_{es}(F_w) = 0.95$ ,  $K_{es}(t_i) = 0.85$ .

Maximum demand-capacity ratio is: 1.

Local bending stresses due to climbing loads, feed line supports, and appurtenance mounts are not considered.

## Options

<ul style="list-style-type: none"> <li>Consider Moments - Legs</li> <li>Consider Moments - Horizontals</li> <li>Consider Moments - Diagonals</li> <li>Use Moment Magnification</li> <li>√ Use Code Stress Ratios</li> <li>√ Use Code Safety Factors - Guys</li> <li>Escalate Ice</li> <li>Always Use Max Kz</li> <li>Use Special Wind Profile</li> <li>Include Bolts In Member Capacity</li> <li>Leg Bolts Are At Top Of Section</li> <li>Secondary Horizontal Braces Leg</li> <li>Use Diamond Inner Bracing (4 Sided)</li> <li>SR Members Have Cut Ends</li> <li>SR Members Are Concentric</li> </ul>	<ul style="list-style-type: none"> <li>Distribute Leg Loads As Uniform</li> <li>Assume Legs Pinned</li> <li>√ Assume Rigid Index Plate</li> <li>√ Use Clear Spans For Wind Area</li> <li>Use Clear Spans For KL/r</li> <li>Retension Guys To Initial Tension</li> <li>√ Bypass Mast Stability Checks</li> <li>√ Use Azimuth Dish Coefficients</li> <li>√ Project Wind Area of Appurt.</li> <li>Autocalc Torque Arm Areas</li> <li>Add IBC .6D+W Combination</li> <li>Sort Capacity Reports By Component</li> <li>Triangulate Diamond Inner Bracing</li> <li>Treat Feed Line Bundles As Cylinder</li> <li>Ignore KL/ry For 60 Deg. Angle Legs</li> </ul>	<ul style="list-style-type: none"> <li>Use ASCE 10 X-Brace Ly Rules</li> <li>Calculate Redundant Bracing Forces</li> <li>Ignore Redundant Members in FEA</li> <li>SR Leg Bolts Resist Compression</li> <li>All Leg Panels Have Same Allowable</li> <li>Offset Girt At Foundation</li> <li>√ Consider Feed Line Torque</li> <li>Include Angle Block Shear Check</li> <li>Use TIA-222-H Bracing Resist. Exemption</li> <li>Use TIA-222-H Tension Splice Exemption</li> <li style="text-align: center;">Poles</li> <li>√ Include Shear-Torsion Interaction</li> <li>Always Use Sub-Critical Flow</li> <li>Use Top Mounted Sockets</li> <li>Pole Without Linear Attachments</li> <li>Pole With Shroud Or No Appurtenances</li> <li>Outside and Inside Corner Radii Are Known</li> </ul>
--	---	---

<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b> 149269.003.01 - NHV 104 943122, CT (BU# 806359)	<b>Page</b> 2 of 15
	<b>Project</b>	<b>Date</b> 17:03:18 05/07/21
	<b>Client</b> Crown Castle	<b>Designed by</b> Bhushan

### Tapered Pole Section Geometry

Section	Elevation ft	Section Length ft	Splice Length ft	Number of Sides	Top Diameter in	Bottom Diameter in	Wall Thickness in	Bend Radius in	Pole Grade
L1	100.000-46.833	53.167	5.167	12	23.430	33.260	0.313	1.250	A572-65 (65 ksi)
L2	46.833-0.000	52.000		12	31.680	41.300	0.375	1.500	A572-65 (65 ksi)

### Tapered Pole Properties

Section	Tip Dia. in	Area in <sup>2</sup>	I in <sup>4</sup>	r in	C in	I/C in <sup>3</sup>	J in <sup>4</sup>	It/Q in <sup>2</sup>	w in	w/t
L1	24.146	23.262	1586.772	8.276	12.137	130.741	3215.230	11.449	5.442	17.414
	34.323	33.153	4593.664	11.795	17.229	266.629	9308.009	16.317	8.076	25.844
L2	33.655	37.800	4728.254	11.207	16.410	288.131	9580.725	18.604	7.485	19.96
	42.625	49.417	10564.262	14.651	21.393	493.809	21406.058	24.322	10.063	26.836

Tower Elevation ft	Gusset Area ft <sup>2</sup> (per face)	Gusset Thickness in	Gusset Grade	Adjust. Factor A <sub>f</sub>	Adjust. Factor A <sub>r</sub>	Weight Mult.	Double Angle Stitch Bolt Spacing Diagonals in	Double Angle Stitch Bolt Spacing Horizontals in	Double Angle Stitch Bolt Spacing Redundants in
L1 100.000-46.83 3				1	1	1			
L2 46.833-0.000				1	1	1			

### Feed Line/Linear Appurtenances - Entered As Round Or Flat

Description	Sector	Exclude From Torque Calculation	Component Type	Placement ft	Total Number	Number Per Row	Start/End Position	Width or Diameter in	Perimeter in	Weight klf
** CR 50 1873(1-5/8) **	C	No	Surface Ar (CaAa)	73.000 - 0.000	6	6	0.150 0.350	1.980		0.001

### Feed Line/Linear Appurtenances - Entered As Area

Description	Face or Leg	Allow Shield	Exclude From Torque Calculation	Component Type	Placement ft	Total Number	C <sub>A</sub> A <sub>A</sub> ft <sup>2</sup> /ft	Weight klf
LDF4-50A(1/2)	A	No	No	Inside Pole	100.000 - 0.000	1	No Ice 1/2" Ice 1" Ice 2" Ice	0.000 0.000 0.000 0.000
LDF5-50A(7/8)	A	No	No	Inside Pole	100.000 - 0.000	6	No Ice 1/2" Ice 1" Ice 2" Ice	0.000 0.000 0.000 0.000
HB158-1-08U8-S8J	A	No	No	Inside Pole	100.000 - 0.000	1	No Ice	0.000

<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b> 149269.003.01 - NHV 104 943122, CT (BU# 806359)	<b>Page</b> 3 of 15
	<b>Project</b>	<b>Date</b> 17:03:18 05/07/21
	<b>Client</b> Crown Castle	<b>Designed by</b> Bhushan

Description	Face or Leg	Allow Shield	Exclude From Torque Calculation	Component Type	Placement ft	Total Number		C <sub>AA</sub> ft <sup>2</sup> /ft	Weight klf
18(1-5/8)							1/2" Ice	0.000	0.001
							1" Ice	0.000	0.001
							2" Ice	0.000	0.001
HB158-21U6S12-X XXM-01(1-5/8)	A	No	No	Inside Pole	100.000 - 0.000	1	No Ice	0.000	0.002
							1/2" Ice	0.000	0.002
							1" Ice	0.000	0.002
							2" Ice	0.000	0.002
**									
HB158-21U6S24-xx M_TMO(1-5/8)	C	No	No	Inside Pole	81.000 - 0.000	3	No Ice	0.000	0.003
							1/2" Ice	0.000	0.003
							1" Ice	0.000	0.003
							2" Ice	0.000	0.003
**									
7916A(19/64)	A	No	No	Inside Pole	42.000 - 0.000	2	No Ice	0.000	0.000
							1/2" Ice	0.000	0.000
							1" Ice	0.000	0.000
							2" Ice	0.000	0.000
LDF4-50A(1/2)	A	No	No	Inside Pole	48.000 - 0.000	1	No Ice	0.000	0.000
							1/2" Ice	0.000	0.000
							1" Ice	0.000	0.000
							2" Ice	0.000	0.000
AVA5-50(7/8)	A	No	No	Inside Pole	95.000 - 0.000	1	No Ice	0.000	0.000
							1/2" Ice	0.000	0.000
							1" Ice	0.000	0.000
							2" Ice	0.000	0.000
**									

### Feed Line/Linear Appurtenances Section Areas

Tower Section	Tower Elevation ft	Face	A <sub>R</sub> ft <sup>2</sup>	A <sub>F</sub> ft <sup>2</sup>	C <sub>AA</sub> In Face ft <sup>2</sup>	C <sub>AA</sub> Out Face ft <sup>2</sup>	Weight K
L1	100.000-46.833	A	0.000	0.000	0.000	0.000	0.298
		B	0.000	0.000	0.000	0.000	0.000
		C	0.000	0.000	31.086	0.000	0.387
L2	46.833-0.000	A	0.000	0.000	0.000	0.000	0.273
		B	0.000	0.000	0.000	0.000	0.000
		C	0.000	0.000	55.638	0.000	0.584

### Feed Line/Linear Appurtenances Section Areas - With Ice

Tower Section	Tower Elevation ft	Face or Leg	Ice Thickness in	A <sub>R</sub> ft <sup>2</sup>	A <sub>F</sub> ft <sup>2</sup>	C <sub>AA</sub> In Face ft <sup>2</sup>	C <sub>AA</sub> Out Face ft <sup>2</sup>	Weight K
L1	100.000-46.833	A	1.379	0.000	0.000	0.000	0.000	0.298
		B		0.000	0.000	0.000	0.000	0.000
		C		0.000	0.000	47.880	0.000	0.855
L2	46.833-0.000	A	1.233	0.000	0.000	0.000	0.000	0.273
		B		0.000	0.000	0.000	0.000	0.000
		C		0.000	0.000	85.695	0.000	1.424

<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b> 149269.003.01 - NHV 104 943122, CT (BU# 806359)	<b>Page</b> 4 of 15
	<b>Project</b>	<b>Date</b> 17:03:18 05/07/21
	<b>Client</b> Crown Castle	<b>Designed by</b> Bhushan

### Feed Line Center of Pressure

Section	Elevation	CP <sub>x</sub>	CP <sub>z</sub>	CP <sub>x</sub> Ice	CP <sub>z</sub> Ice
	<i>ft</i>	<i>in</i>	<i>in</i>	<i>in</i>	<i>in</i>
L1	100.000-46.833	-1.655	2.866	-1.683	2.915
L2	46.833-0.000	-2.749	4.762	-2.748	4.760

Note: For pole sections, center of pressure calculations do not consider feed line shielding.

### Shielding Factor Ka

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L1	11	CR 50 1873(1-5/8)	46.83 - 73.00	1.0000	1.0000
L2	11	CR 50 1873(1-5/8)	0.00 - 46.83	1.0000	1.0000

### Discrete Tower Loads

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert <i>ft</i> <i>ft</i> <i>ft</i>	Azimuth Adjustment °	Placement <i>ft</i>	C <sub>AA</sub> Front <i>ft</i> <sup>2</sup>	C <sub>AA</sub> Side <i>ft</i> <sup>2</sup>	Weight <i>K</i>	
(3) DB846F65ZAXY w/ Mount Pipe	A	From Leg	4.000	0.000	100.000	No Ice	6.100	6.810	0.058
			0.000			1/2" Ice	6.800	7.520	0.119
			5.000			1" Ice	7.510	8.240	0.191
						2" Ice	8.980	9.730	0.369
(3) DB846F65ZAXY w/ Mount Pipe	B	From Leg	4.000	0.000	100.000	No Ice	6.100	6.810	0.058
			0.000			1/2" Ice	6.800	7.520	0.119
			5.000			1" Ice	7.510	8.240	0.191
						2" Ice	8.980	9.730	0.369
Sub6 Antenna - VZS01 w/ Mount Pipe	A	From Leg	4.000	0.000	100.000	No Ice	4.915	2.687	0.101
			0.000			1/2" Ice	5.264	3.151	0.141
			5.000			1" Ice	5.623	3.631	0.186
						2" Ice	6.371	4.639	0.294
Sub6 Antenna - VZS01 w/ Mount Pipe	B	From Leg	4.000	0.000	100.000	No Ice	4.915	2.687	0.101
			0.000			1/2" Ice	5.264	3.151	0.141
			5.000			1" Ice	5.623	3.631	0.186
						2" Ice	6.371	4.639	0.294
Sub6 Antenna - VZS01 w/ Mount Pipe	C	From Leg	4.000	0.000	100.000	No Ice	4.915	2.687	0.101
			0.000			1/2" Ice	5.264	3.151	0.141
			5.000			1" Ice	5.623	3.631	0.186
						2" Ice	6.371	4.639	0.294
(2) MX06FRO660-03 w/ Mount Pipe	A	From Leg	4.000	0.000	100.000	No Ice	6.540	5.550	0.103
			0.000			1/2" Ice	7.060	6.050	0.185
			5.000			1" Ice	7.600	6.570	0.277
						2" Ice	8.700	7.650	0.496
(2) MX06FRO660-03 w/ Mount Pipe	B	From Leg	4.000	0.000	100.000	No Ice	6.540	5.550	0.103
			0.000			1/2" Ice	7.060	6.050	0.185
			5.000			1" Ice	7.600	6.570	0.277
						2" Ice	8.700	7.650	0.496
(2) MX06FRO660-03 w/ Mount Pipe	C	From Leg	4.000	0.000	100.000	No Ice	6.540	5.550	0.103
			0.000			1/2" Ice	7.060	6.050	0.185
			5.000			1" Ice	7.600	6.570	0.277
						2" Ice	8.700	7.650	0.496

<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b>		149269.003.01 - NHV 104 943122, CT (BU# 806359)		<b>Page</b>		5 of 15	
	<b>Project</b>				<b>Date</b>		17:03:18 05/07/21	
	<b>Client</b>		Crown Castle		<b>Designed by</b>		Bhushan	

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C <sub>AA</sub> Front	C <sub>AA</sub> Side	Weight	
			Horz	Vert						
			ft	ft	°	ft	ft <sup>2</sup>	ft <sup>2</sup>	K	
RRFDC-3315-PF-48	A	From Leg	4.000	0.000	0.000	100.000	No Ice	3.364	2.192	0.021
			0.000				1/2" Ice	3.597	2.395	0.050
			5.000				1" Ice	3.838	2.606	0.082
							2" Ice	4.343	3.049	0.158
(3) RFV01U-D2A	A	From Leg	4.000	0.000	0.000	100.000	No Ice	1.875	1.013	0.070
			0.000				1/2" Ice	2.045	1.145	0.087
			5.000				1" Ice	2.223	1.284	0.106
							2" Ice	2.601	1.585	0.153
RFV01U-D1A	A	From Leg	4.000	0.000	0.000	100.000	No Ice	1.875	1.250	0.084
			0.000				1/2" Ice	2.045	1.393	0.103
			5.000				1" Ice	2.223	1.543	0.124
							2" Ice	2.601	1.865	0.175
(2) RFV01U-D1A	C	From Leg	4.000	0.000	0.000	100.000	No Ice	1.875	1.250	0.084
			0.000				1/2" Ice	2.045	1.393	0.103
			5.000				1" Ice	2.223	1.543	0.124
							2" Ice	2.601	1.865	0.175
GPS_A	A	From Leg	4.000	0.000	0.000	100.000	No Ice	0.255	0.255	0.001
			0.000				1/2" Ice	0.320	0.320	0.005
			5.000				1" Ice	0.393	0.393	0.010
							2" Ice	0.561	0.561	0.025
(3) 6' x 2" Mount Pipe	C	From Leg	4.000	0.000	0.000	100.000	No Ice	1.425	1.425	0.022
			0.000				1/2" Ice	1.925	1.925	0.033
			1.000				1" Ice	2.294	2.294	0.048
							2" Ice	3.060	3.060	0.090
4' x 2" Pipe Mount	A	From Leg	4.000	0.000	0.000	100.000	No Ice	0.785	0.785	0.029
			0.000				1/2" Ice	1.028	1.028	0.035
			0.000				1" Ice	1.281	1.281	0.044
							2" Ice	1.814	1.814	0.072
4' x 2" Pipe Mount	B	From Leg	4.000	0.000	0.000	100.000	No Ice	0.785	0.785	0.029
			0.000				1/2" Ice	1.028	1.028	0.035
			0.000				1" Ice	1.281	1.281	0.044
							2" Ice	1.814	1.814	0.072
4' x 2" Pipe Mount	C	From Leg	4.000	0.000	0.000	100.000	No Ice	0.785	0.785	0.029
			0.000				1/2" Ice	1.028	1.028	0.035
			0.000				1" Ice	1.281	1.281	0.044
							2" Ice	1.814	1.814	0.072
91900314	C	None		0.000	0.000	103.000	No Ice	3.600	3.600	0.075
							1/2" Ice	4.180	4.180	0.105
							1" Ice	4.750	4.750	0.135
							2" Ice	5.900	5.900	0.195
91900314	C	None		0.000	0.000	106.000	No Ice	3.600	3.600	0.075
							1/2" Ice	4.180	4.180	0.105
							1" Ice	4.750	4.750	0.135
							2" Ice	5.900	5.900	0.195
Platform Mount [LP 713-1]	C	None		0.000	0.000	100.000	No Ice	32.890	32.890	1.510
							1/2" Ice	35.760	35.760	2.228
							1" Ice	38.760	38.760	3.026
							2" Ice	45.260	45.260	4.865
**										
TA-2335-DAB-L-095	B	From Leg	1.000	0.000	0.000	95.000	No Ice	7.140	2.080	0.033
			0.000				1/2" Ice	7.680	2.480	0.076
			0.000				1" Ice	8.230	2.910	0.124
							2" Ice	9.400	3.810	0.234
Pipe Mount [PM 601-1]	B	From Leg	0.500	0.000	0.000	95.000	No Ice	1.320	1.320	0.065
			0.000				1/2" Ice	1.580	1.580	0.077
			0.000				1" Ice	1.840	1.840	0.093
							2" Ice	2.400	2.400	0.134

<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b>	<b>Page</b>	
	149269.003.01 - NHV 104 943122, CT (BU# 806359)		6 of 15
	<b>Project</b>	<b>Date</b>	17:03:18 05/07/21
<b>Client</b>	Crown Castle		<b>Designed by</b>
			Bhushan

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C <sub>AA</sub> Front	C <sub>AA</sub> Side	Weight
			Horz Lateral ft	Vert ft					
**									
AIR 32 B2A B66AA_T-MOBILE w/ Mount Pipe	A	From Leg	4.000	0.000	81.000	No Ice	3.760	3.150	0.194
			0.000			1/2" Ice	4.120	3.490	0.252
			2.000			1" Ice	4.480	3.840	0.320
						2" Ice	5.240	4.580	0.485
AIR 32 B2A B66AA_T-MOBILE w/ Mount Pipe	B	From Leg	4.000	0.000	81.000	No Ice	3.760	3.150	0.194
			0.000			1/2" Ice	4.120	3.490	0.252
			2.000			1" Ice	4.480	3.840	0.320
						2" Ice	5.240	4.580	0.485
AIR 32 B2A B66AA_T-MOBILE w/ Mount Pipe	C	From Leg	4.000	0.000	81.000	No Ice	3.760	3.150	0.194
			0.000			1/2" Ice	4.120	3.490	0.252
			2.000			1" Ice	4.480	3.840	0.320
						2" Ice	5.240	4.580	0.485
APXVAALL24_43-U-NA20 _TMO w/ Mount Pipe	A	From Leg	4.000	0.000	81.000	No Ice	14.690	6.870	0.183
			0.000			1/2" Ice	15.460	7.550	0.311
			2.000			1" Ice	16.230	8.250	0.453
						2" Ice	17.820	9.670	0.782
APXVAALL24_43-U-NA20 _TMO w/ Mount Pipe	B	From Leg	4.000	0.000	81.000	No Ice	14.690	6.870	0.183
			0.000			1/2" Ice	15.460	7.550	0.311
			2.000			1" Ice	16.230	8.250	0.453
						2" Ice	17.820	9.670	0.782
APXVAALL24_43-U-NA20 _TMO w/ Mount Pipe	C	From Leg	4.000	0.000	81.000	No Ice	14.690	6.870	0.183
			0.000			1/2" Ice	15.460	7.550	0.311
			2.000			1" Ice	16.230	8.250	0.453
						2" Ice	17.820	9.670	0.782
AIR6449 B41_T-MOBILE w/ Mount Pipe	A	From Leg	4.000	0.000	81.000	No Ice	5.190	2.710	0.128
			0.000			1/2" Ice	5.590	3.040	0.174
			2.000			1" Ice	6.020	3.380	0.227
						2" Ice	6.900	4.120	0.354
AIR6449 B41_T-MOBILE w/ Mount Pipe	B	From Leg	4.000	0.000	81.000	No Ice	5.190	2.710	0.128
			0.000			1/2" Ice	5.590	3.040	0.174
			2.000			1" Ice	6.020	3.380	0.227
						2" Ice	6.900	4.120	0.354
AIR6449 B41_T-MOBILE w/ Mount Pipe	C	From Leg	4.000	0.000	81.000	No Ice	5.190	2.710	0.128
			0.000			1/2" Ice	5.590	3.040	0.174
			2.000			1" Ice	6.020	3.380	0.227
						2" Ice	6.900	4.120	0.354
RADIO 4449 B71 B85A_T-MOBILE	A	From Leg	4.000	0.000	81.000	No Ice	1.970	1.587	0.073
			0.000			1/2" Ice	2.147	1.749	0.093
			2.000			1" Ice	2.331	1.918	0.116
						2" Ice	2.721	2.280	0.170
RADIO 4449 B71 B85A_T-MOBILE	B	From Leg	4.000	0.000	81.000	No Ice	1.970	1.587	0.073
			0.000			1/2" Ice	2.147	1.749	0.093
			2.000			1" Ice	2.331	1.918	0.116
						2" Ice	2.721	2.280	0.170
RADIO 4449 B71 B85A_T-MOBILE	C	From Leg	4.000	0.000	81.000	No Ice	1.970	1.587	0.073
			0.000			1/2" Ice	2.147	1.749	0.093
			2.000			1" Ice	2.331	1.918	0.116
						2" Ice	2.721	2.280	0.170
RADIO 4415 B25_TMO	A	From Leg	4.000	0.000	81.000	No Ice	1.856	0.870	0.047
			0.000			1/2" Ice	2.027	0.997	0.062
			2.000			1" Ice	2.204	1.134	0.079
						2" Ice	2.582	1.432	0.122
RADIO 4415 B25_TMO	B	From Leg	4.000	0.000	81.000	No Ice	1.856	0.870	0.047
			0.000			1/2" Ice	2.027	0.997	0.062
			2.000			1" Ice	2.204	1.134	0.079
						2" Ice	2.582	1.432	0.122

<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b>	<b>Page</b>	
	149269.003.01 - NHV 104 943122, CT (BU# 806359)		7 of 15
	<b>Project</b>	<b>Date</b>	17:03:18 05/07/21
<b>Client</b>	Crown Castle	<b>Designed by</b> Bhushan	

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustment °	Placement ft	C <sub>AA</sub> Front ft <sup>2</sup>	C <sub>AA</sub> Side ft <sup>2</sup>	Weight K
RADIO 4415 B25_TMO	C	From Leg	4.000 0.000 2.000	0.000	81.000	No Ice 1.856 1/2" Ice 2.027 1" Ice 2.204 2" Ice 2.582	0.870 0.997 1.134 1.432	0.047 0.062 0.079 0.122
4' x 2" Pipe Mount	A	From Leg	4.000 0.000 0.000	0.000	81.000	No Ice 0.785 1/2" Ice 1.028 1" Ice 1.281 2" Ice 1.814	0.785 1.028 1.281 1.814	0.029 0.035 0.044 0.072
4' x 2" Pipe Mount	B	From Leg	4.000 0.000 0.000	0.000	81.000	No Ice 0.785 1/2" Ice 1.028 1" Ice 1.281 2" Ice 1.814	0.785 1.028 1.281 1.814	0.029 0.035 0.044 0.072
4' x 2" Pipe Mount	C	From Leg	4.000 0.000 0.000	0.000	81.000	No Ice 0.785 1/2" Ice 1.028 1" Ice 1.281 2" Ice 1.814	0.785 1.028 1.281 1.814	0.029 0.035 0.044 0.072
Platform Mount [LP 713-1]	C	None		0.000	81.000	No Ice 32.890 1/2" Ice 35.760 1" Ice 38.760 2" Ice 45.260	32.890 35.760 38.760 45.260	1.510 2.228 3.026 4.865
**								
APXV18-206517S-C w/ Mount Pipe	A	From Leg	4.000 0.000 0.000	0.000	73.000	No Ice 3.790 1/2" Ice 4.380 1" Ice 4.990 2" Ice 6.250	3.160 3.750 4.350 5.590	0.053 0.094 0.145 0.281
APXV18-206517S-C w/ Mount Pipe	B	From Leg	4.000 0.000 0.000	0.000	73.000	No Ice 3.790 1/2" Ice 4.380 1" Ice 4.990 2" Ice 6.250	3.160 3.750 4.350 5.590	0.053 0.094 0.145 0.281
APXV18-206517S-C w/ Mount Pipe	C	From Leg	4.000 0.000 0.000	0.000	73.000	No Ice 3.790 1/2" Ice 4.380 1" Ice 4.990 2" Ice 6.250	3.160 3.750 4.350 5.590	0.053 0.094 0.145 0.281
**								
Side Arm Mount [SO 102-3]	C	None		0.000	48.000	No Ice 3.600 1/2" Ice 4.180 1" Ice 4.750 2" Ice 5.900	3.600 4.180 4.750 5.900	0.075 0.105 0.135 0.195
6' x 2" Mount Pipe	C	From Leg	2.000 0.000 0.000	0.000	48.000	No Ice 1.425 1/2" Ice 1.925 1" Ice 2.294 2" Ice 3.060	1.425 1.925 2.294 3.060	0.022 0.033 0.048 0.090
**								
Side Arm Mount [SO 104-3]	C	None		0.000	42.000	No Ice 2.620 1/2" Ice 3.300 1" Ice 3.980 2" Ice 5.350	2.620 3.300 3.980 5.350	0.288 0.408 0.528 0.768
57860-30	A	From Leg	2.000 0.000 8.000	0.000	42.000	No Ice 0.066 1/2" Ice 0.101 1" Ice 0.144 2" Ice 0.251	0.066 0.101 0.144 0.251	0.000 0.002 0.003 0.010
6' x 2" Mount Pipe	A	From Leg	2.000 0.000 0.000	0.000	42.000	No Ice 1.425 1/2" Ice 1.925 1" Ice 2.294 2" Ice 3.060	1.425 1.925 2.294 3.060	0.022 0.033 0.048 0.090
6' x 2" Mount Pipe	C	From Leg	2.000 0.000	0.000	42.000	No Ice 1.425 1/2" Ice 1.925	1.425 1.925	0.022 0.033

<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b> 149269.003.01 - NHV 104 943122, CT (BU# 806359)	<b>Page</b> 8 of 15
	<b>Project</b>	<b>Date</b> 17:03:18 05/07/21
	<b>Client</b> Crown Castle	<b>Designed by</b> Bhushan

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert	Azimuth Adjustment	Placement	C <sub>AA</sub> Front	C <sub>AA</sub> Side	Weight
			ft ft ft	°	ft	ft <sup>2</sup>	ft <sup>2</sup>	K
			0.000			1" Ice 2.294 2" Ice 3.060	2.294 3.060	0.048 0.090
**								

### Dishes

Description	Face or Leg	Dish Type	Offset Type	Offsets: Horz Lateral Vert	Azimuth Adjustment	3 dB Beam Width	Elevation	Outside Diameter	Aperture Area	Weight
				ft ft ft	°	°	ft	ft	ft <sup>2</sup>	K
1111	C	Paraboloid w/o Radome	From Leg	1.000 0.000 7.000	-24.000		42.000	3.330	No Ice 8.709 1/2" Ice 9.151 1" Ice 9.592 2" Ice 10.475	0.040 0.087 0.134 0.228
*										
TA-2324-LHCP	C	Paraboloid w/Radome	From Leg	1.000 0.000 0.000	-42.000		48.000	2.167	No Ice 3.687 1/2" Ice 3.976 1" Ice 4.265 2" Ice 4.843	0.028 0.048 0.069 0.110
*										

### Load Combinations

Comb. No.	Description
1	Dead Only
2	1.2 Dead+1.0 Wind 0 deg - No Ice
3	0.9 Dead+1.0 Wind 0 deg - No Ice
4	1.2 Dead+1.0 Wind 30 deg - No Ice
5	0.9 Dead+1.0 Wind 30 deg - No Ice
6	1.2 Dead+1.0 Wind 60 deg - No Ice
7	0.9 Dead+1.0 Wind 60 deg - No Ice
8	1.2 Dead+1.0 Wind 90 deg - No Ice
9	0.9 Dead+1.0 Wind 90 deg - No Ice
10	1.2 Dead+1.0 Wind 120 deg - No Ice
11	0.9 Dead+1.0 Wind 120 deg - No Ice
12	1.2 Dead+1.0 Wind 150 deg - No Ice
13	0.9 Dead+1.0 Wind 150 deg - No Ice
14	1.2 Dead+1.0 Wind 180 deg - No Ice
15	0.9 Dead+1.0 Wind 180 deg - No Ice
16	1.2 Dead+1.0 Wind 210 deg - No Ice
17	0.9 Dead+1.0 Wind 210 deg - No Ice
18	1.2 Dead+1.0 Wind 240 deg - No Ice
19	0.9 Dead+1.0 Wind 240 deg - No Ice
20	1.2 Dead+1.0 Wind 270 deg - No Ice
21	0.9 Dead+1.0 Wind 270 deg - No Ice
22	1.2 Dead+1.0 Wind 300 deg - No Ice
23	0.9 Dead+1.0 Wind 300 deg - No Ice
24	1.2 Dead+1.0 Wind 330 deg - No Ice
25	0.9 Dead+1.0 Wind 330 deg - No Ice
26	1.2 Dead+1.0 Ice+1.0 Temp
27	1.2 Dead+1.0 Wind 0 deg+1.0 Ice+1.0 Temp



<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b> 149269.003.01 - NHV 104 943122, CT (BU# 806359)	<b>Page</b> 9 of 15
	<b>Project</b>	<b>Date</b> 17:03:18 05/07/21
	<b>Client</b> Crown Castle	<b>Designed by</b> Bhushan

Comb. No.	Description
28	1.2 Dead+1.0 Wind 30 deg+1.0 Ice+1.0 Temp
29	1.2 Dead+1.0 Wind 60 deg+1.0 Ice+1.0 Temp
30	1.2 Dead+1.0 Wind 90 deg+1.0 Ice+1.0 Temp
31	1.2 Dead+1.0 Wind 120 deg+1.0 Ice+1.0 Temp
32	1.2 Dead+1.0 Wind 150 deg+1.0 Ice+1.0 Temp
33	1.2 Dead+1.0 Wind 180 deg+1.0 Ice+1.0 Temp
34	1.2 Dead+1.0 Wind 210 deg+1.0 Ice+1.0 Temp
35	1.2 Dead+1.0 Wind 240 deg+1.0 Ice+1.0 Temp
36	1.2 Dead+1.0 Wind 270 deg+1.0 Ice+1.0 Temp
37	1.2 Dead+1.0 Wind 300 deg+1.0 Ice+1.0 Temp
38	1.2 Dead+1.0 Wind 330 deg+1.0 Ice+1.0 Temp
39	Dead+Wind 0 deg - Service
40	Dead+Wind 30 deg - Service
41	Dead+Wind 60 deg - Service
42	Dead+Wind 90 deg - Service
43	Dead+Wind 120 deg - Service
44	Dead+Wind 150 deg - Service
45	Dead+Wind 180 deg - Service
46	Dead+Wind 210 deg - Service
47	Dead+Wind 240 deg - Service
48	Dead+Wind 270 deg - Service
49	Dead+Wind 300 deg - Service
50	Dead+Wind 330 deg - Service

### Maximum Member Forces

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L1	100 - 46.833	Pole	Max Tension	1	0.000	0.000	0.000
			Max. Compression	26	-29.725	-1.858	3.472
			Max. Mx	20	-14.223	663.180	2.156
			Max. My	2	-14.217	0.869	666.463
			Max. Vy	8	17.791	-662.939	0.827
			Max. Vx	2	-17.805	0.869	666.463
			Max. Torque	22			-4.519
L2	46.833 - 0	Pole	Max Tension	1	0.000	0.000	0.000
			Max. Compression	26	-46.290	-0.939	1.283
			Max. Mx	8	-26.561	-1774.145	22.749
			Max. My	2	-26.560	-14.360	1783.942
			Max. Vy	8	23.956	-1774.145	22.749
			Max. Vx	2	-24.088	-14.360	1783.942
			Max. Torque	10			3.898

### Maximum Reactions

Location	Condition	Gov. Load Comb.	Vertical K	Horizontal, X K	Horizontal, Z K
Pole	Max. Vert	28	46.290	-2.581	4.453
	Max. H <sub>x</sub>	20	26.585	23.737	0.007
	Max. H <sub>z</sub>	2	26.585	-0.316	24.060
	Max. M <sub>x</sub>	2	1783.942	-0.316	24.060
	Max. M <sub>z</sub>	8	1774.145	-23.929	0.457
	Max. Torsion	10	3.893	-20.582	-11.713
	Min. Vert	23	19.939	20.533	11.817
Min. H <sub>x</sub>	8	26.585	-23.929	0.457	

<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b> 149269.003.01 - NHV 104 943122, CT (BU# 806359)	<b>Page</b> 10 of 15
	<b>Project</b>	<b>Date</b> 17:03:18 05/07/21
	<b>Client</b> Crown Castle	<b>Designed by</b> Bhushan

Location	Condition	Gov. Load Comb.	Vertical K	Horizontal, X K	Horizontal, Z K
	Min. H <sub>z</sub>	14	26.585	-0.021	-23.840
	Min. M <sub>x</sub>	14	-1771.222	-0.021	-23.840
	Min. M <sub>z</sub>	20	-1765.566	23.737	0.007
	Min. Torsion	22	-3.750	20.533	11.817

### Tower Mast Reaction Summary

Load Combination	Vertical K	Shear <sub>x</sub> K	Shear <sub>z</sub> K	Overtuning Moment, M <sub>x</sub> kip-ft	Overtuning Moment, M <sub>z</sub> kip-ft	Torque kip-ft
Dead Only	22.154	0.000	0.000	-0.710	0.390	-0.000
1.2 Dead+1.0 Wind 0 deg - No Ice	26.585	0.316	-24.060	-1783.942	-14.359	2.138
0.9 Dead+1.0 Wind 0 deg - No Ice	19.939	0.316	-24.060	-1771.965	-14.426	2.141
1.2 Dead+1.0 Wind 30 deg - No Ice	26.585	12.105	-20.869	-1546.216	-893.017	0.096
0.9 Dead+1.0 Wind 30 deg - No Ice	19.939	12.105	-20.869	-1535.809	-887.273	0.111
1.2 Dead+1.0 Wind 60 deg - No Ice	26.585	20.713	-12.244	-902.338	-1535.389	-2.180
0.9 Dead+1.0 Wind 60 deg - No Ice	19.939	20.713	-12.244	-896.193	-1525.393	-2.157
1.2 Dead+1.0 Wind 90 deg - No Ice	26.585	23.929	-0.457	-22.748	-1774.145	-3.862
0.9 Dead+1.0 Wind 90 deg - No Ice	19.939	23.929	-0.457	-22.425	-1762.577	-3.837
1.2 Dead+1.0 Wind 120 deg - No Ice	26.585	20.582	11.713	875.675	-1529.793	-3.893
0.9 Dead+1.0 Wind 120 deg - No Ice	19.939	20.582	11.713	870.097	-1519.819	-3.873
1.2 Dead+1.0 Wind 150 deg - No Ice	26.585	11.809	20.619	1532.953	-879.853	-3.233
0.9 Dead+1.0 Wind 150 deg - No Ice	19.939	11.809	20.619	1523.060	-874.160	-3.223
1.2 Dead+1.0 Wind 180 deg - No Ice	26.585	0.021	23.840	1771.222	-1.404	-1.893
0.9 Dead+1.0 Wind 180 deg - No Ice	19.939	0.021	23.840	1759.762	-1.518	-1.896
1.2 Dead+1.0 Wind 210 deg - No Ice	26.585	-11.935	20.696	1535.835	885.583	-0.236
0.9 Dead+1.0 Wind 210 deg - No Ice	19.939	-11.935	20.696	1525.936	879.625	-0.251
1.2 Dead+1.0 Wind 240 deg - No Ice	26.585	-20.627	11.915	884.157	1532.130	1.330
0.9 Dead+1.0 Wind 240 deg - No Ice	19.939	-20.627	11.915	878.552	1521.905	1.307
1.2 Dead+1.0 Wind 270 deg - No Ice	26.585	-23.737	-0.007	-2.111	1765.566	2.788
0.9 Dead+1.0 Wind 270 deg - No Ice	19.939	-23.737	-0.007	-1.869	1753.791	2.763
1.2 Dead+1.0 Wind 300 deg - No Ice	26.585	-20.533	-11.817	-882.589	1528.341	3.750
0.9 Dead+1.0 Wind 300 deg - No Ice	19.939	-20.533	-11.817	-876.525	1518.126	3.729
1.2 Dead+1.0 Wind 330 deg - No Ice	26.585	-11.585	-20.963	-1551.819	869.638	3.124
0.9 Dead+1.0 Wind 330 deg - No Ice	19.939	-11.585	-20.963	-1541.385	863.740	3.114

<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b> 149269.003.01 - NHV 104 943122, CT (BU# 806359)	<b>Page</b> 11 of 15
	<b>Project</b>	<b>Date</b> 17:03:18 05/07/21
	<b>Client</b> Crown Castle	<b>Designed by</b> Bhushan

Load Combination	Vertical K	Shear <sub>x</sub> K	Shear <sub>z</sub> K	Overturning Moment, M <sub>x</sub> kip-ft	Overturning Moment, M <sub>z</sub> kip-ft	Torque kip-ft
No Ice						
1.2 Dead+1.0 Ice+1.0 Temp	46.290	0.000	-0.000	-1.283	-0.939	-0.000
1.2 Dead+1.0 Wind 0 deg+1.0 Ice+1.0 Temp	46.290	0.058	-5.135	-390.986	-3.736	0.390
1.2 Dead+1.0 Wind 30 deg+1.0 Ice+1.0 Temp	46.290	2.581	-4.453	-339.009	-196.100	-0.024
1.2 Dead+1.0 Wind 60 deg+1.0 Ice+1.0 Temp	46.290	4.424	-2.607	-198.021	-336.749	-0.470
1.2 Dead+1.0 Wind 90 deg+1.0 Ice+1.0 Temp	46.290	5.110	-0.083	-5.423	-388.872	-0.791
1.2 Dead+1.0 Wind 120 deg+1.0 Ice+1.0 Temp	46.290	4.399	2.509	190.653	-335.666	-0.790
1.2 Dead+1.0 Wind 150 deg+1.0 Ice+1.0 Temp	46.290	2.526	4.407	334.131	-193.610	-0.641
1.2 Dead+1.0 Wind 180 deg+1.0 Ice+1.0 Temp	46.290	0.003	5.095	386.243	-1.301	-0.352
1.2 Dead+1.0 Wind 210 deg+1.0 Ice+1.0 Temp	46.290	-2.550	4.422	334.701	192.596	-0.001
1.2 Dead+1.0 Wind 240 deg+1.0 Ice+1.0 Temp	46.290	-4.408	2.547	192.273	334.002	0.321
1.2 Dead+1.0 Wind 270 deg+1.0 Ice+1.0 Temp	46.290	-5.075	-0.001	-1.562	385.152	0.600
1.2 Dead+1.0 Wind 300 deg+1.0 Ice+1.0 Temp	46.290	-4.390	-2.529	-194.328	333.274	0.762
1.2 Dead+1.0 Wind 330 deg+1.0 Ice+1.0 Temp	46.290	-2.486	-4.470	-340.019	189.611	0.614
Dead+Wind 0 deg - Service	22.154	0.068	-5.221	-386.202	-2.814	0.464
Dead+Wind 30 deg - Service	22.154	2.627	-4.528	-334.810	-192.760	0.024
Dead+Wind 60 deg - Service	22.154	4.495	-2.657	-195.618	-331.624	-0.467
Dead+Wind 90 deg - Service	22.154	5.193	-0.099	-5.473	-383.238	-0.835
Dead+Wind 120 deg - Service	22.154	4.466	2.542	188.749	-330.412	-0.847
Dead+Wind 150 deg - Service	22.154	2.563	4.474	330.842	-189.910	-0.708
Dead+Wind 180 deg - Service	22.154	0.004	5.173	382.353	-0.009	-0.418
Dead+Wind 210 deg - Service	22.154	-2.590	4.491	331.468	191.740	-0.053
Dead+Wind 240 deg - Service	22.154	-4.476	2.585	190.587	331.509	0.291
Dead+Wind 270 deg - Service	22.154	-5.151	-0.002	-1.005	381.971	0.608
Dead+Wind 300 deg - Service	22.154	-4.456	-2.564	-191.344	330.687	0.814
Dead+Wind 330 deg - Service	22.154	-2.514	-4.549	-336.023	188.288	0.676

## Solution Summary

Load Comb.	Sum of Applied Forces			Sum of Reactions			% Error
	PX K	PY K	PZ K	PX K	PY K	PZ K	
1	0.000	-22.154	0.000	0.000	22.154	0.000	0.000%
2	0.316	-26.585	-24.060	-0.316	26.585	24.060	0.000%
3	0.316	-19.939	-24.060	-0.316	19.939	24.060	0.000%
4	12.105	-26.585	-20.869	-12.105	26.585	20.869	0.000%
5	12.105	-19.939	-20.869	-12.105	19.939	20.869	0.000%
6	20.713	-26.585	-12.244	-20.713	26.585	12.244	0.000%
7	20.713	-19.939	-12.244	-20.713	19.939	12.244	0.000%
8	23.929	-26.585	-0.457	-23.929	26.585	0.457	0.000%
9	23.929	-19.939	-0.457	-23.929	19.939	0.457	0.000%
10	20.582	-26.585	11.713	-20.582	26.585	-11.713	0.000%
11	20.582	-19.939	11.713	-20.582	19.939	-11.713	0.000%
12	11.809	-26.585	20.619	-11.809	26.585	-20.619	0.000%
13	11.809	-19.939	20.619	-11.809	19.939	-20.619	0.000%
14	0.021	-26.585	23.840	-0.021	26.585	-23.840	0.000%
15	0.021	-19.939	23.840	-0.021	19.939	-23.840	0.000%

<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b>	<b>Page</b>	
	149269.003.01 - NHV 104 943122, CT (BU# 806359)		12 of 15
	<b>Project</b>	<b>Date</b>	17:03:18 05/07/21
<b>Client</b>	Crown Castle		<b>Designed by</b>
			Bhushan

Load Comb.	Sum of Applied Forces			Sum of Reactions			% Error
	PX K	PY K	PZ K	PX K	PY K	PZ K	
16	-11.935	-26.585	20.696	11.935	26.585	-20.696	0.000%
17	-11.935	-19.939	20.696	11.935	19.939	-20.696	0.000%
18	-20.627	-26.585	11.915	20.627	26.585	-11.915	0.000%
19	-20.627	-19.939	11.915	20.627	19.939	-11.915	0.000%
20	-23.737	-26.585	-0.007	23.737	26.585	0.007	0.000%
21	-23.737	-19.939	-0.007	23.737	19.939	0.007	0.000%
22	-20.533	-26.585	-11.817	20.533	26.585	11.817	0.000%
23	-20.533	-19.939	-11.817	20.533	19.939	11.817	0.000%
24	-11.585	-26.585	-20.963	11.585	26.585	20.963	0.000%
25	-11.585	-19.939	-20.963	11.585	19.939	20.963	0.000%
26	0.000	-46.290	0.000	-0.000	46.290	0.000	0.000%
27	0.058	-46.290	-5.135	-0.058	46.290	5.135	0.000%
28	2.581	-46.290	-4.453	-2.581	46.290	4.453	0.000%
29	4.424	-46.290	-2.607	-4.424	46.290	2.607	0.000%
30	5.110	-46.290	-0.083	-5.110	46.290	0.083	0.000%
31	4.399	-46.290	2.509	-4.399	46.290	-2.509	0.000%
32	2.526	-46.290	4.407	-2.526	46.290	-4.407	0.000%
33	0.003	-46.290	5.095	-0.003	46.290	-5.095	0.000%
34	-2.550	-46.290	4.422	2.550	46.290	-4.422	0.000%
35	-4.408	-46.290	2.547	4.408	46.290	-2.547	0.000%
36	-5.074	-46.290	-0.001	5.075	46.290	0.001	0.000%
37	-4.390	-46.290	-2.529	4.390	46.290	2.529	0.000%
38	-2.486	-46.290	-4.470	2.486	46.290	4.470	0.000%
39	0.068	-22.154	-5.221	-0.068	22.154	5.221	0.000%
40	2.627	-22.154	-4.528	-2.627	22.154	4.528	0.000%
41	4.495	-22.154	-2.657	-4.495	22.154	2.657	0.000%
42	5.193	-22.154	-0.099	-5.193	22.154	0.099	0.000%
43	4.466	-22.154	2.542	-4.466	22.154	-2.542	0.000%
44	2.563	-22.154	4.474	-2.563	22.154	-4.474	0.000%
45	0.004	-22.154	5.173	-0.004	22.154	-5.173	0.000%
46	-2.590	-22.154	4.491	2.590	22.154	-4.491	0.000%
47	-4.476	-22.154	2.585	4.476	22.154	-2.585	0.000%
48	-5.151	-22.154	-0.002	5.151	22.154	0.002	0.000%
49	-4.456	-22.154	-2.564	4.456	22.154	2.564	0.000%
50	-2.514	-22.154	-4.549	2.514	22.154	4.549	0.000%

### Non-Linear Convergence Results

Load Combination	Converged?	Number of Cycles	Displacement Tolerance	Force Tolerance
1	Yes	4	0.0000001	0.0000001
2	Yes	4	0.0000001	0.00040693
3	Yes	4	0.0000001	0.00025334
4	Yes	5	0.0000001	0.00005693
5	Yes	5	0.0000001	0.00002500
6	Yes	5	0.0000001	0.00005974
7	Yes	5	0.0000001	0.00002630
8	Yes	4	0.0000001	0.00054467
9	Yes	4	0.0000001	0.00033611
10	Yes	5	0.0000001	0.00004784
11	Yes	4	0.0000001	0.00097474
12	Yes	5	0.0000001	0.00006527
13	Yes	5	0.0000001	0.00002904
14	Yes	4	0.0000001	0.00036798
15	Yes	4	0.0000001	0.00022971
16	Yes	5	0.0000001	0.00005325
17	Yes	5	0.0000001	0.00002333
18	Yes	5	0.0000001	0.00005196
19	Yes	5	0.0000001	0.00002278

<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b>	<b>Page</b>	
		149269.003.01 - NHV 104 943122, CT (BU# 806359)	13 of 15
	<b>Project</b>		<b>Date</b>
			17:03:18 05/07/21
	<b>Client</b>	<b>Designed by</b>	
	Crown Castle	Bhushan	

20	Yes	4	0.0000001	0.00043773
21	Yes	4	0.0000001	0.00026993
22	Yes	5	0.0000001	0.00006643
23	Yes	5	0.0000001	0.00002952
24	Yes	5	0.0000001	0.00004848
25	Yes	4	0.0000001	0.00098421
26	Yes	4	0.0000001	0.00000832
27	Yes	4	0.0000001	0.00049652
28	Yes	4	0.0000001	0.00054852
29	Yes	4	0.0000001	0.00055004
30	Yes	4	0.0000001	0.00049396
31	Yes	4	0.0000001	0.00053171
32	Yes	4	0.0000001	0.00053958
33	Yes	4	0.0000001	0.00047994
34	Yes	4	0.0000001	0.00052375
35	Yes	4	0.0000001	0.00052290
36	Yes	4	0.0000001	0.00048411
37	Yes	4	0.0000001	0.00054760
38	Yes	4	0.0000001	0.00054056
39	Yes	4	0.0000001	0.00002309
40	Yes	4	0.0000001	0.00002900
41	Yes	4	0.0000001	0.00003464
42	Yes	4	0.0000001	0.00003018
43	Yes	4	0.0000001	0.00003145
44	Yes	4	0.0000001	0.00004884
45	Yes	4	0.0000001	0.00002170
46	Yes	4	0.0000001	0.00002315
47	Yes	4	0.0000001	0.00002203
48	Yes	4	0.0000001	0.00002567
49	Yes	4	0.0000001	0.00005134
50	Yes	4	0.0000001	0.00002990

### Maximum Tower Deflections - Service Wind

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L1	100 - 46.833	9.654	39	0.786	0.009
L2	52 - 0	2.871	39	0.494	0.002

### Critical Deflections and Radius of Curvature - Service Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
106.000	91900314	39	9.654	0.786	0.009	44619
103.000	91900314	39	9.654	0.786	0.009	44619
100.000	(3) DB846F65ZAXY w/ Mount Pipe	39	9.654	0.786	0.009	44619
95.000	TA-2335-DAB-L-095	39	8.845	0.760	0.008	44619
81.000	AIR 32 B2A B66AA_T-MOBILE w/ Mount Pipe	39	6.638	0.683	0.006	11741
73.000	APXV18-206517S-C w/ Mount Pipe	39	5.457	0.637	0.005	8262
49.000	1111	39	2.583	0.470	0.002	4943
48.000	TA-2324-LHCP	39	2.492	0.462	0.002	5036
42.000	Side Arm Mount [SO 104-3]	39	1.992	0.412	0.001	5753

<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b> 149269.003.01 - NHV 104 943122, CT (BU# 806359)	<b>Page</b> 14 of 15
	<b>Project</b>	<b>Date</b> 17:03:18 05/07/21
	<b>Client</b> Crown Castle	<b>Designed by</b> Bhushan

### Maximum Tower Deflections - Design Wind

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L1	100 - 46.833	44.484	2	3.609	0.040
L2	52 - 0	13.260	4	2.279	0.010

### Critical Deflections and Radius of Curvature - Design Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
106.000	91900314	2	44.484	3.609	0.041	9764
103.000	91900314	2	44.484	3.609	0.041	9764
100.000	(3) DB846F65ZAXY w/ Mount Pipe	2	44.484	3.609	0.041	9764
95.000	TA-2335-DAB-L-095	2	40.762	3.489	0.037	9764
81.000	AIR 32 B2A B66AA_T-MOBILE w/ Mount Pipe	2	30.603	3.144	0.027	2568
73.000	APXV18-206517S-C w/ Mount Pipe	2	25.168	2.932	0.021	1806
49.000	1111	4	11.932	2.170	0.009	1078
48.000	TA-2324-LHCP	4	11.512	2.133	0.009	1098
42.000	Side Arm Mount [SO 104-3]	4	9.212	1.902	0.007	1254

### Compression Checks

#### Pole Design Data

Section No.	Elevation ft	Size	L ft	L <sub>u</sub> ft	KL/r	A in <sup>2</sup>	P <sub>u</sub> K	φP <sub>n</sub> K	Ratio P <sub>u</sub> / φP <sub>n</sub>
L1	100 - 46.833 (1)	TP33.26x23.43x0.313	53.167	0.000	0.0	32.192	-14.217	1883.240	0.008
L2	46.833 - 0 (2)	TP41.3x31.68x0.375	52.000	0.000	0.0	49.417	-26.560	2890.890	0.009

#### Pole Bending Design Data

Section No.	Elevation ft	Size	M <sub>ux</sub> kip-ft	φM <sub>ux</sub> kip-ft	Ratio M <sub>ux</sub> / φM <sub>ux</sub>	M <sub>uy</sub> kip-ft	φM <sub>uy</sub> kip-ft	Ratio M <sub>uy</sub> / φM <sub>uy</sub>
L1	100 - 46.833 (1)	TP33.26x23.43x0.313	666.495	1431.783	0.466	0.000	1431.783	0.000
L2	46.833 - 0 (2)	TP41.3x31.68x0.375	1785.575	2740.083	0.652	0.000	2740.083	0.000

#### Pole Shear Design Data

Section No.	Elevation ft	Size	Actual V <sub>u</sub> K	φV <sub>n</sub> K	Ratio V <sub>u</sub> / φV <sub>n</sub>	Actual T <sub>u</sub> kip-ft	φT <sub>n</sub> kip-ft	Ratio T <sub>u</sub> / φT <sub>n</sub>
L1	100 - 46.833 (1)	TP33.26x23.43x0.313	17.831	564.972	0.032	4.483	1589.900	0.003

<b>tnxTower</b>  <b>B+T Group</b> 1717 S. Boulder, Suite 300 Tulsa, OK 74119 Phone: (918) 587-4630 FAX: (918) 295-0265	<b>Job</b> 149269.003.01 - NHV 104 943122, CT (BU# 806359)	<b>Page</b> 15 of 15
	<b>Project</b>	<b>Date</b> 17:03:18 05/07/21
	<b>Client</b> Crown Castle	<b>Designed by</b> Bhushan

Section No.	Elevation ft	Size	Actual $V_u$ K	$\phi V_n$ K	Ratio $\frac{V_u}{\phi V_n}$	Actual $T_u$ kip-ft	$\phi T_n$ kip-ft	Ratio $\frac{T_u}{\phi T_n}$
L2	46.833 - 0 (2)	TP41.3x31.68x0.375	24.153	867.267	0.028	0.096	3122.058	0.000

### Pole Interaction Design Data

Section No.	Elevation ft	Ratio $\frac{P_u}{\phi P_n}$	Ratio $\frac{M_{ux}}{\phi M_{nx}}$	Ratio $\frac{M_{uy}}{\phi M_{ny}}$	Ratio $\frac{V_u}{\phi V_n}$	Ratio $\frac{T_u}{\phi T_n}$	Comb. Stress Ratio	Allow. Stress Ratio	Criteria
L1	100 - 46.833 (1)	0.008	0.466	0.000	0.032	0.003	0.474 ✓ ✓	1.000	4.8.2 ✓
L2	46.833 - 0 (2)	0.009	0.652	0.000	0.028	0.000	0.662 ✓ ✓	1.000	4.8.2 ✓

### Section Capacity Table


Section No.	Elevation ft	Component Type	Size	Critical Element	P K	$\phi P_{allow}$ K	% Capacity	Pass Fail
L1	100 - 46.833	Pole	TP33.26x23.43x0.313	1	-14.217	1883.240	47.4	Pass
L2	46.833 - 0	Pole	TP41.3x31.68x0.375	2	-26.560	2890.890	66.2	Pass
Summary								
Pole (L2)							66.2	Pass
<b>RATING =</b>							<b>66.2</b>	<b>Pass</b>



**APPENDIX B**  
**BASE LEVEL DRAWING**

(OTHER CONSIDERED EQUIPMENT)  
(2) 19/64" TO 42 FT LEVEL  
(1) 1/2" TO 48 FT LEVEL  
(1) 7/8" TO 95 FT LEVEL

(PROPOSED EQUIPMENT CONFIGURATION)  
(1) 1/2" TO 100 FT LEVEL  
(6) 7/8" TO 100 FT LEVEL  
(2) 1-5/8" TO 100 FT LEVEL

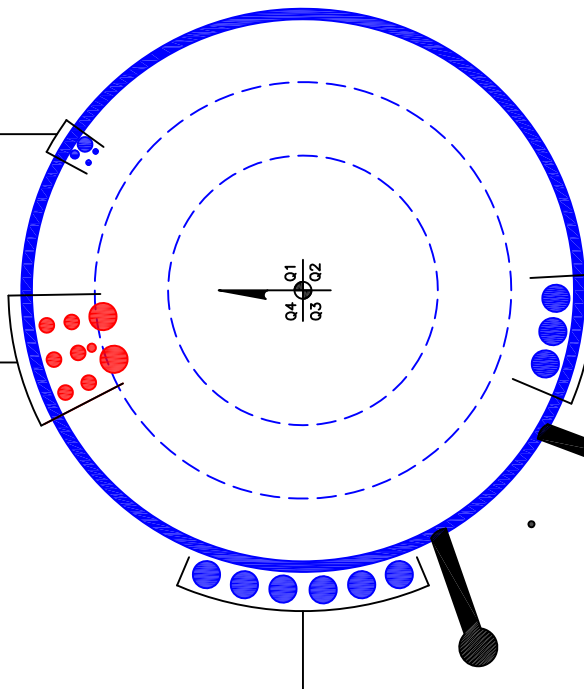

(OTHER CONSIDERED EQUIPMENT)  
(3) 1-5/8" TO 81 FT LEVEL

(OTHER CONSIDERED EQUIPMENT)  
(6) 1-5/8" TO 73 FT LEVEL

BUSINESS UNIT: 806359

**APPENDIX C**  
**ADDITIONAL CALCULATIONS**

# Monopole Base Plate Connection




Site Info	
BU #	806359
Site Name	NHV 104 943122
Order #	552661, Rev.0

Analysis Considerations	
TIA-222 Revision	H
Grout Considered:	See Custom Sheet
$I_{ar}$ (in)	See Custom Sheet

Applied Loads	
Moment (kip-ft)	1785.57
Axial Force (kips)	26.56
Shear Force (kips)	24.15

\*TIA-222-H Section 15.5 Applied

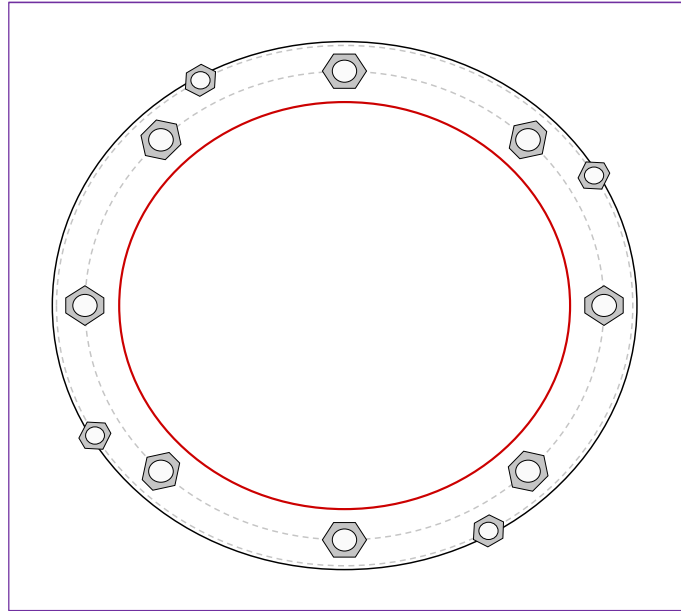

Connection Properties	Analysis Results
-----------------------	------------------

Anchor Rod Data
GROUP 1: (8) 2-1/4" $\phi$ bolts (A615-75 N; $F_y=75$ ksi, $F_u=100$ ksi) on 47.58" BC
GROUP 2: (4) 1-3/4" $\phi$ bolts (Dywidag 150 N; $F_y=127.7$ ksi, $F_u=125$ ksi) on 52.8" BC
Base Plate Data
53.58" OD x 2.5" Plate (A572-60; $F_y=60$ ksi, $F_u=75$ ksi)
Stiffener Data
N/A
Pole Data
41.3" x 0.375" 12-sided pole (A572-65; $F_y=65$ ksi, $F_u=80$ ksi)

Anchor Rod Summary <span style="float: right;">(units of kips, kip-in)</span>		
GROUP 1:		
$Pu_t = 162.12$	$\phi Pn_t = 243.75$	<b>Stress Rating</b>
$Vu = 3.02$	$\phi Vn = 149.1$	<b>63.3%</b>
$Mu = n/a$	$\phi Mn = n/a$	<b>Pass</b>
GROUP 2:		
$Pu_t = 107.33$	$\phi Pn_t = 178.13$	<b>Stress Rating</b>
$Vu = 0$	$\phi Vn = 112.75$	<b>57.4%</b>
$Mu = n/a$	$\phi Mn = n/a$	<b>Pass</b>
Base Plate Summary		
Max Stress (ksi):	14.35	(Flexural)
Allowable Stress (ksi):	54	
Stress Rating:	<b>25.3%</b>	<b>Pass</b>

PROJECT	<b>149269.003.01 - NHV 104 943122</b>
SUBJECT	<b>Anchor Rod Bracket Analysis</b>
DATE	<b>05-07-21</b>
v4.6.1	TIA-222 Rev. Apply TIA-222-H Section 15.5?



**H**  
Yes

Analysis Criteria	
Design/Analysis	Analysis
Load Type	Current Load
Current load	107.33 kips
AR Capacity	276.4 kips

Tower Type	Monopole
------------	----------

Manufacturers Tower Prop.	
Pole Thickness	0.375 in
Pole Grade	A572-65
Fy	65 ksi
Fu	80 ksi
Base Plate Gr.	A572-60
Fy	60 ksi
Fu	75 ksi

Post-Installed Adhesive AR Mod.	
ARB Type	Welded
Size	1.75 in
Grade	'22-150 (Willian
Fy	127.7 ksi
Fu	150 ksi

Anchor Rod Bracket Analysis Checks		
Tube Bearing	26.7%	-
Tube Compression	40.1%	-
Gusset Shear	22.2%	-
Gusset Flexure	N/A	-
Welds	Gusset to Tower and BP	31.0%
	Gusset to Tube	48.1%
Geometry	N/A	-
Tower Punching	40.3%	-
Tube Punching	44.2%	-
<b>Utilization</b>		<b>48.1%</b>

Bracket Properties		
Gusset	Pipe/Tube	Weld - Gusset to Pipe/Tube
Thickness	Size	FEXX
Width at Tube	Total Length	Weld Type
Height at Pole	Length above Gusset	Fillet Size
Height at Tube	Length below Gusset	Bevel Depth
Grade	Grade	
Fy	Fy	
Fu	Fu	
Weld - Gusset to Tower		Weld - Gusset to Base Plate
FEXX	FEXX	
Weld Type	Weld Type	
Fillet Size	Fillet Size	
	Bevel Depth	
	Gap	
	Notch (horiz)	
	Notch (vert)	
	Pipe/Tube Welded to Base/Footpad?	
	Fillet Size	

## Drilled Pier Foundation

BU #: 806359  
 Site Name: NHV 104 943122  
 Order Number: 552661, Rev.0

TIA-222 Revision: H  
 Tower Type: Monopole

Report File:



Applied Loads		
	Comp.	Uplift
Moment (kip-ft)	1786	
Axial Force (kips)	27	
Shear Force (kips)	24	

Material Properties		
Concrete Strength, f <sub>c</sub> :	3	ksi
Rebar Strength, F <sub>y</sub> :	60	ksi
Tie Yield Strength, F <sub>y</sub> t:	40	ksi

Pier Design Data	
Depth	13.7 ft
Ext. Above Grade	1.3 ft
Pier Section 1	
<i>From 1.3' above grade to 13.7' below grade</i>	
Pier Diameter	7.8 ft
Rebar Quantity	22
Rebar Size	11
Clear Cover to Ties	3 in
Tie Size	6
Tie Spacing	in

[Rebar & Pier Options](#)

[Embedded Pole Inputs](#)

[Belled Pier Inputs](#)

Analysis Results		
<b>Soil Lateral Check</b>		
	Compression	Uplift
D <sub>v=0</sub> (ft from TOC)	7.92	-
Soil Safety Factor	4.81	-
Max Moment (kip-ft)	1997.57	-
Rating*	26.3%	-
<b>Soil Vertical Check</b>		
	Compression	Uplift
Skin Friction (kips)	727.30	-
End Bearing (kips)	1502.05	-
Weight of Concrete (kips)	129.02	-
Total Capacity (kips)	2229.35	-
Axial (kips)	156.02	-
Rating*	6.7%	-
<b>Reinforced Concrete Flexure</b>		
	Compression	Uplift
Critical Depth (ft from TOC)	7.76	-
Critical Moment (kip-ft)	1997.36	-
Critical Moment Capacity	6261.07	-
Rating*	30.4%	-
<b>Reinforced Concrete Shear</b>		
	Compression	Uplift
Critical Depth (ft from TOC)	12.02	-
Critical Shear (kip)	659.01	-
Critical Shear Capacity	843.07	-
Rating*	74.4%	-
<b>Soil Interaction Rating*</b>		<b>26.3%</b>
<b>Structural Foundation Rating*</b>		<b>74.4%</b>

\*Rating per TIA-222-H Section 15.5

Check Limitation	
Apply TIA-222-H Section 15.5:	<input checked="" type="checkbox"/>
N/A	<input type="checkbox"/>
Shear Design Options	
Check Shear along Depth of Pier:	<input checked="" type="checkbox"/>
Utilize Shear-Friction Methodology:	<input type="checkbox"/>
Override Critical Depth:	<input type="checkbox"/>

[Go to Soil Calculations](#)

Soil Profile			
Groundwater Depth	N/A	# of Layers	4


Layer	Top (ft)	Bottom (ft)	Thickness (ft)	γ <sub>soil</sub> (pcf)	γ <sub>concrete</sub> (pcf)	Cohesion (ksf)	Angle of Friction (degrees)	Calculated Ultimate Skin Friction Comp (ksf)	Calculated Ultimate Skin Friction Uplift (ksf)	Ultimate Skin Friction Comp Override (ksf)	Ultimate Skin Friction Uplift Override (ksf)	Ult. Net Bearing Capacity (ksf)	SPT Blow Count	Soil Type
1	0	4	4	105	150	0	0	0.000	0.000	0.00	0.00			Cohesionless
2	4	6	2	105	150	0	29	0.000	0.000	0.62	0.62			Cohesionless
3	6	8.3	2.3	135	150	0	40	0.000	0.000	2.58	2.58			Cohesionless
4	8.3	13.7	5.4	180	150	20	0	9.000	9.000	6.00	6.00	40		Cohesive

# ASCE 7 Hazards Report

**Address:**  
No Address at This  
Location

**Standard:** ASCE/SEI 7-10  
**Risk Category:** II  
**Soil Class:** D - Stiff Soil

**Elevation:** 161.91 ft (NAVD 88)  
**Latitude:** 41.237842  
**Longitude:** -73.086111

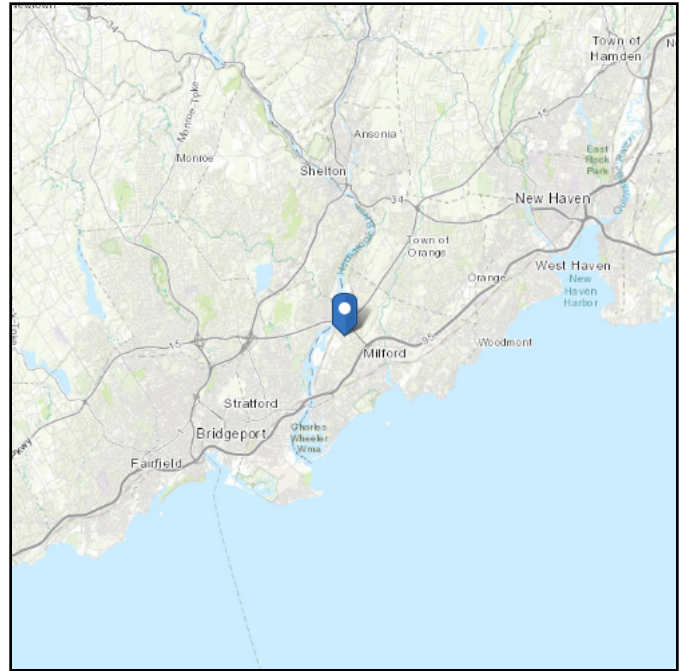





**Site Soil Class:** D - Stiff Soil

**Results:**

$S_s$ :	0.197	$S_{DS}$ :	0.21
$S_1$ :	0.063	$S_{D1}$ :	0.101
$F_a$ :	1.6	$T_L$ :	6
$F_v$ :	2.4	PGA :	0.105
$S_{MS}$ :	0.315	PGA <sub>M</sub> :	0.167
$S_{M1}$ :	0.152	F <sub>PGA</sub> :	1.59
		$I_e$ :	1

**Seismic Design Category** B

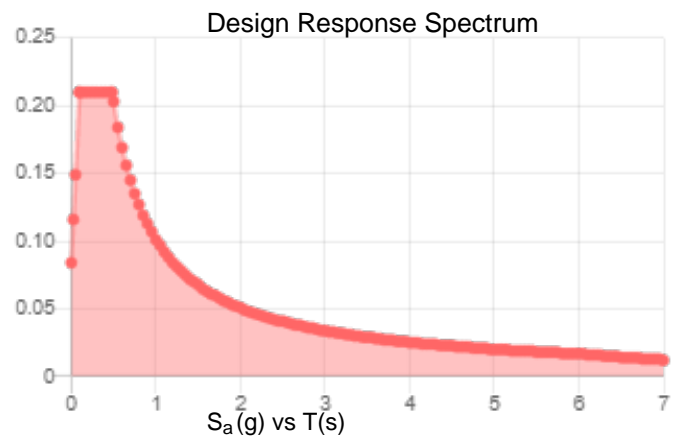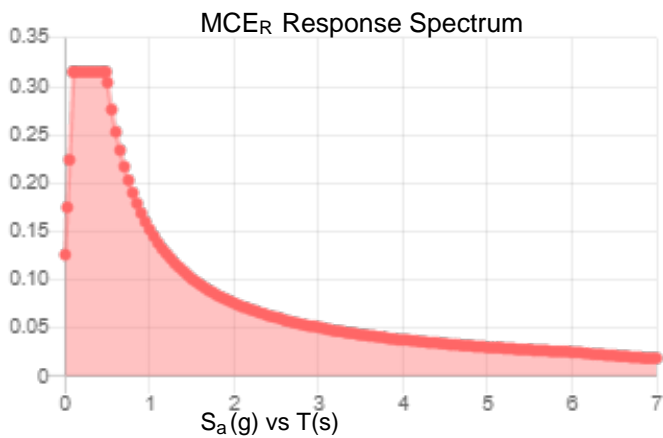

**Data Accessed:**

Thu Apr 29 2021

**Date Source:**

USGS Seismic Design Maps based on ASCE/SEI 7-10, incorporating Supplement 1 and errata of March 31, 2013, and ASCE/SEI 7-10 Table 1.5-2. Additional data for site-specific ground motion procedures in accordance with ASCE/SEI 7-10 Ch. 21 are available from USGS.

## Ice

---

### Results:

Ice Thickness: 0.75 in.

Concurrent Temperature: 15 F

Gust Speed: 50 mph

**Data Source:** Standard ASCE/SEI 7-10, Figs. 10-2 through 10-8

**Date Accessed:** Thu Apr 29 2021

Ice thicknesses on structures in exposed locations at elevations higher than the surrounding terrain and in valleys and gorges may exceed the mapped values.

Values provided are equivalent radial ice thicknesses due to freezing rain with concurrent 3-second gust speeds, for a 50-year mean recurrence interval, and temperatures concurrent with ice thicknesses due to freezing rain. Thicknesses for ice accretions caused by other sources shall be obtained from local meteorological studies. Ice thicknesses in exposed locations at elevations higher than the surrounding terrain and in valleys and gorges may exceed the mapped values.

---

The ASCE 7 Hazard Tool is provided for your convenience, for informational purposes only, and is provided "as is" and without warranties of any kind. The location data included herein has been obtained from information developed, produced, and maintained by third party providers; or has been extrapolated from maps incorporated in the ASCE 7 standard. While ASCE has made every effort to use data obtained from reliable sources or methodologies, ASCE does not make any representations or warranties as to the accuracy, completeness, reliability, currency, or quality of any data provided herein. Any third-party links provided by this Tool should not be construed as an endorsement, affiliation, relationship, or sponsorship of such third-party content by or from ASCE.

ASCE does not intend, nor should anyone interpret, the results provided by this Tool to replace the sound judgment of a competent professional, having knowledge and experience in the appropriate field(s) of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the contents of this Tool or the ASCE 7 standard.

In using this Tool, you expressly assume all risks associated with your use. Under no circumstances shall ASCE or its officers, directors, employees, members, affiliates, or agents be liable to you or any other person for any direct, indirect, special, incidental, or consequential damages arising from or related to your use of, or reliance on, the Tool or any information obtained therein. To the fullest extent permitted by law, you agree to release and hold harmless ASCE from any and all liability of any nature arising out of or resulting from any use of data provided by the ASCE 7 Hazard Tool.

# Exhibit E

## **Mount Analysis**



Maser Consulting Connecticut  
 1055 Washington Boulevard  
 Stamford, CT 06901  
 203.324.0800  
 peter.albano@colliersengineering.com

## Post-Modification Antenna Mount Analysis Report and PMI Requirements

Mount Fix

SMART Tool Project #: 10063096  
 Maser Consulting Connecticut Project #: 21777070A

January 24, 2022

### Site Information

Site ID: 467373-VZW / MILFORD CT  
 Site Name: MILFORD CT  
 Carrier Name: Verizon Wireless  
 Address: 423 Oronoque Rd  
 Milford, Connecticut 06460  
 New Haven County  
 Latitude: 41.237875°  
 Longitude: -73.086219°

### Structure Information

Tower Type: 108-Ft Monopole  
 Mount Type: 12.83-Ft Platform

FUZE ID # 16231875

### Analysis Results

Platform: 62.9% **Pass w/ Modifications\***

**\*Antennas and equipment to be installed in compliance with PMI Requirements of this mount analysis.**


### \*\*\*Contractor PMI Requirements:

*Included at the end of this MA report*

*Available & Submitted via portal at <https://pmi.vzwsmart.com>*

*For additional questions and support, please reach out to:  
 pmisupport@colliersengineering.com*

Report Prepared By: Selene Chen



01/25/2022

**Executive Summary:**

The objective of this report is to summarize the analysis results of the antenna support mount including the proposed modifications at the subject facility for the final wireless telecommunications configuration, per the applicable codes and standards.

This analysis is inclusive of the mount structure only and does not address the structural capacity of the supporting structure. This mounting frame was not analyzed as an anchor attachment point for fall protection. All climbing activities are required to have a fall protection plan completed by a competent person.

**Sources of Information:**

Document Type	Remarks
<i>Radio Frequency Data Sheet (RFDS)</i>	<i>Verizon RFDS Site ID: 324367, dated January 15, 2021</i>
<i>Mount Mapping Report</i>	<i>Level-Up Tower, Site ID: 806359, dated February 16, 2021</i>
<i>Final RAD Center</i>	<i>Email Correspondence with Ziad Khalil Cheiban, dated January 19, 2022</i>
<i>Previous Mount Analysis</i>	<i>Maser Consulting Connecticut, Project #: 21777070A, dated April 8, 2021</i>
<i>Mount Modification Drawings</i>	<i>Maser Consulting Connecticut, Project #: 21777070A, dated January 24, 2022</i>

**Analysis Criteria:**

Codes and Standards:	ANSI/TIA-222-H
Wind Parameters:	Basic Wind Speed (Ultimate 3-sec. Gust), $V_{ULT}$ : 119 mph Ice Wind Speed (3-sec. Gust): 50 mph Design Ice Thickness: 1.00 in Risk Category: II Exposure Category: C Topographic Category: 1 Topographic Feature Considered: N/A Topographic Method: N/A Ground Elevation Factor, $K_e$ : 0.994
Seismic Parameters:	$S_s$ : 0.203 $S_1$ : 0.054
Maintenance Parameters:	Wind Speed (3-sec. Gust): 30 mph Maintenance Live Load, $L_v$ : 250 lbs. Maintenance Live Load, $L_m$ : 500 lbs.
Analysis Software:	RISA-3D (V17)

**Final Loading Configuration:**

The following equipment has been considered for the analysis of the mount:

Mount Elevation (ft)	Equipment Elevation (ft)	Quantity	Manufacturer	Model	Status
103.00	105.00	6	Andrew	DB846F65ZAXY	Retained
		1	Generic	GPS	
		6	JMA Wireless	MX06FRO660-03	Added
		3	Samsung	MT6407-77A	
		3	Samsung	B2/B66A RRH-BR049	
		3	Samsung	B5/B13 RRH-BR04C	
		1	Raycap	RVZDC-6627-PF-48	

The recent mount mapping did not report existing OVP units. However, it is acceptable to install up to any three (3) of the OVP model numbers listed below as required at any location other than the mount face without affecting the structural capacity of the mount. If OVP units are installed on the mount face, a mount re-analysis may be required.

Model Number	Ports	AKA
DB-B1-6C-12AB-0Z	6	OVP-6
RVZDC-6627-PF-48	12	OVP-12

**Standard Conditions:**

1. All engineering services are performed on the basis that the information provided to Maser Consulting Connecticut and used in this analysis is current and correct. The existing equipment loading has been applied at locations determined from the supplied documentation. Any deviation from the loading locations specified in this report shall be communicated to Maser Consulting Connecticut to verify deviation will not adversely impact the analysis.
2. Mounts are assumed to have been properly fabricated, installed and maintained in good condition, twist free and plumb in accordance with its original design and manufacturer’s specifications.

Obvious safety and structural issues/deficiencies noticed at the time of the mount mapping and reported in the Mount Mapping Report are assumed to be corrected and documented as part of the PMI process and are not considered in the mount analysis.

The mount analysis and the mount mapping are not a condition assessment of the mount. Proper maintenance and condition assessments are still required post analysis.

3. For mount analyses completed from other data sources (including new replacement mounts) and not specifically mapped in accordance with the NSTD-446 Standard, the mounts are assumed to have been properly fabricated, installed and maintained in good condition, twist free and plumb in accordance with its original design and manufacturer’s specifications.
4. All member connections are assumed to have been designed to meet or exceed the load carrying capacity of the connected member unless otherwise specified in this report.
5. The mount was checked up to, and including, the bolts that fasten it to the mount collar/attachment and threaded rod connections in collar members if applicable. Local deformation and interaction between the mount collar/attachment and the supporting tower structure are outside the scope of this analysis.

6. All services are performed, results obtained, and recommendations made in accordance with generally accepted engineering principles and practices. Maser Consulting Connecticut is not responsible for the conclusion, opinions, and recommendations made by others based on the information supplied.
7. Structural Steel Grades have been assumed as follows, if applicable, unless otherwise noted in this analysis:
  - o Channel, Solid Round, Angle, Plate      ASTM A36 (Gr. 36)
  - o HSS (Rectangular)                              ASTM 500 (Gr. B-46)
  - o Pipe    ASTM A53 (Gr. B-35)
  - o Threaded Rod                                      F1554 (Gr. 36)
  - o Bolts    ASTM A325
8. Any mount modifications listed under Sources of Information are assumed to have been installed per the design specifications.

**Discrepancies between in-field conditions and the assumptions listed above may render this analysis invalid unless explicitly approved by Maser Consulting Connecticut.**

**Analysis Results:**

Component	Utilization %	Pass/Fail
<i>Standoff Horizontal</i>	23.3 %	Pass
<i>Connection Plate</i>	19.9 %	Pass
<i>Face Horizontal</i>	62.9 %	Pass
<i>Crossmember</i>	31.7 %	Pass
<i>Crossmember Angle</i>	49.9 %	Pass
<i>Mod Support Rail</i>	38.3 %	Pass
<i>Antenna Pipe</i>	50.3 %	Pass
<i>Pipe 2.5</i>	44.8 %	Pass
<i>Mod Support Rail Angle</i>	36.2 %	Pass
<i>Mod Kicker</i>	12.8 %	Pass
<i>Mod Support Bracing</i>	35.9 %	Pass
<i>Connection Check</i>	26.6 %	Pass

<b>Structure Rating – (Controlling Utilization of all Components)</b>	<b>62.9%</b>
---	--------------

**Mount Steel (EPA)a per ANSI/TIA-222-H Section 2.6.11.2:**

Ice Thickness (In)	Mount Pipes Excluded		Mount Pipes Included	
	Front (EPA)a (Sq. Ft.)	Side (EPA)a (Sq. Ft.)	Front (EPA)a (Sq. Ft.)	Side (EPA)a (Sq. Ft.)
0	39.6	39.4	64.3	64.1
0.5	47.4	48.0	82.8	82.2
1	54.7	55.6	100.5	99.6

**Notes:**

- (EPA)a values listed above may be used in the absence of more precise information
- (EPA)a values in the table above include 3 sector(s).
- Ka factors included in (EPA)a calculations



## **Requirements:**

The existing mount will be **SUFFICIENT** for the final loading configuration (attachment 2) **after the modifications detailed in attachment 3 are successfully completed.**

ANSI/ASSP rigging plan review services compliant with the requirements of ANSI/TIA 322 are available for a Construction Class IV site or other, if required. Separate review fees will apply.

## **Attachments:**

1. **Contractor Required PMI Report Deliverables**
2. Antenna Placement Diagrams
3. Mount Modification Drawings
4. Mount Photos
5. Mount Mapping Report (for reference only)
6. Analysis Calculations
7. TIA Adoption and Wind Speed Usage Letter

# Mount Desktop – Post Modification Inspection (PMI) Report Requirements

## Documents & Photos Required from Contractor – Mount Modification

Electronic pdf version of this can be downloaded at <https://pmi.vzwsmart.com>

For additional questions and support, please reach out to [pmisupport@colliersengineering.com](mailto:pmisupport@colliersengineering.com)

---

PSLC #: 467373

SMART Project #: 10063096

Fuze Project ID: 16231875

**Purpose** – to upload the proper documentation to the SMART Tool in order to allow the SMART Tool engineering vendor to complete the required Mount Desktop review of the Post Modification Inspection Report.

- Contractor is responsible for making certain the photos provided as noted below provide confirmation that the modification was completed in accordance with the modification drawings.
- Contractor shall relay any data that can impact the performance of the mount or the mount modification, this includes safety issues.

### **Base Requirements:**

- If installation of the modification will cause damage to the structure, the climbing facility, or safety climb if present or any installed system, SMART Tool vendor to be notified prior to install. Any special photos outside of the standard requirements will be indicated on the drawings.
- Provide “as built drawings” showing contractor’s name, preparer’s signature, and date. Any deviations from the drawings (proposed modification) shall be shown. NOTE: If loading is different than what is conveyed in the post-modification passing mount analysis (MA) contact the SMART Tool vendor immediately.
- Each photo shall be time and date stamped.
- Photos should be high resolution.
- Contractor shall ensure that the safety climb wire rope is not adversely impacted by the install of the modification components. This may involve the install of wire rope guides, or other items to protect the wire rope. If there is conflict, contact the SMART Tool engineer for recommendations.
- The PMI can be accessed at the following portal: <https://pmi.vzwsmart.com>

### **Photo Requirements:**

- Photos taken at ground level
  - Photo of Gate Signs showing the tower owner, site name, and number.
  - Overall tower structure after installation of the modifications.
  - Photos of the mount after installation of the modifications; if the mounts are at different rad elevations, pictures must be provided for all elevations that the modifications were installed
- Photos taken at Mount Elevation
  - Photos showing the safety climb wire rope above and below the mount prior to modification.
  - Photos showing the climbing facility and safety climb if present.

- Photos showing each individual sector after installation of modifications. Each entire sector must be in one photo to show the interconnection of members.
  - These photos shall also certify that the placement and geometry of the equipment on the mount is as depicted in the antenna placement diagram in this form.
- Photos that show the model number of each antenna and piece of equipment installed per sector.
- Photos of each installed modification per the modification drawings; pictures shall also include connection hardware (U-bolts, bolts, nuts, all-threaded rods, etc.)
- Photos showing the distances (relative distance between collars) of the installed modifications from the appropriate reference locations shown in the modification drawings.
- Photos showing the installed modifications onto the tower (i.e. ring/collar mounts, tie-backs, V-bracing kits, etc.); if the existing mount elevation needs to be changed according to the modification drawings, an elevation measurement shall be provided before the elevation change.

**Material Certification:**

- Materials utilized must be as per specification on the drawings or the equivalent as validated by the SMART Tool vendor.
  - If the materials are as specified on the drawings
    - The contractor shall provide the packing list, or the materials certifications for the materials utilized to perform the mount modification
    - Commscope, Metrosite, Perfect Vision, Sabre, and Site Pro have all agreed to support Verizon vendors with the necessary material certifications
  - If seeking permission to use an equivalent
    - It is required that the SMART Tool engineering vendor approval of such is included in the contractor submission package. There may be an additional charge for approval if the equivalent submission doesn't meet specifications as prescribed in the drawings.

All hardware has been properly installed, and the existing hardware was inspected.

The material utilized was as specified on the SMART Tool engineering vendor Mount Modification Drawings and included in the material certification folder is a packing list or invoice for these materials.

OR

The material utilized was approved by a SMART Tool engineering vendor as an "equivalent" and this approval is included as part of the contractor submission.

**Antenna & Equipment Placement and Geometry Confirmation:**

The contractor certifies that the photos support and the equipment on the mount is as depicted on the sketch and table included in this form and with the mount analysis provided.

OR

The contractor notes that the equipment on the mount is not in accordance with the sketch and has noted the differences below and provided photo documentation of any alterations.

**Comments:**

**Was the mount modification completed in conjunction with the equipment change / installation?**

Yes       No

**Special Instructions / Validation as required from the MA or Mod Drawings:**

**Issue:**

Contractor to install proposed OVP on existing Position 6 pipe in Alpha sector.

Contractor to relocate antenna mount below existing platform as needed in order to install new kicker kit with new collar.

Contractor shall inspect climbing facilities and ensure that the safety climb is in good condition. Contractor shall install safety climb wire rope guide in locations where the wire rope is rubbing against mount to tower attachments. Contractor shall provide photos of safety climb wire rope guide installation.

**Response:**

**Special Instruction Confirmation:**

The contractor has read and acknowledges the above special instructions.

**Comments:**

**Contractor certifies that the climbing facility / safety climb was not damaged prior to starting work:**

Yes       No

**Contractor certifies no new damage created during the current installation:**

Yes       No

**Contractor to certify the condition of the safety climb and verify no damage when leaving the site:**

Safety Climb in Good Condition

Safety Climb Damaged

**Comments:**

--

**Certifying Individual:**

Company:	
Employee Name:	
Contact Phone:	
Email:	
Date:	

S r A  
 Sr r T M  
 M E 1 3.


1 63 6

1 2 2 22


P 1



Plan View

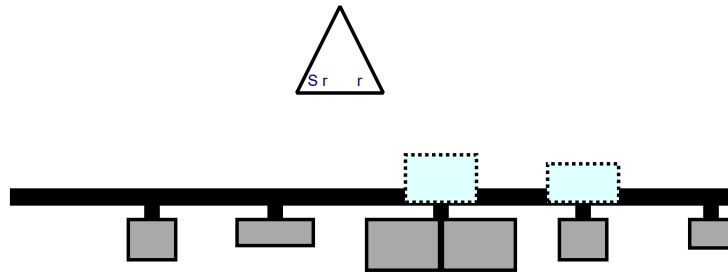

Front View - L Sr r

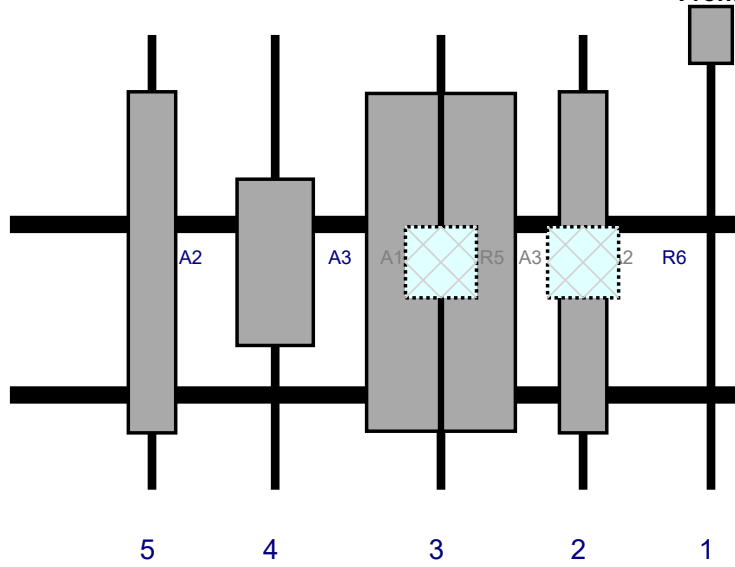

R	M d	d	D	P	P	A	.A	A	S	d
		r	L.	P	P	P	r	T.	O	
A	PS	12	14	1		r			R	d 2 16 2 21
A2	DB 46 65 A Y	2	1	121	2	r	4		R	d
R6	B5 B13 RR BR 4 R 1 D2A	15	15	121	2	B	d 4			Add d
A3	M 6 RO66 3	1.3	15.4	1	3	r	4			Add d
A3	M 6 RO66 3	1.3	15.4	1	3	r	4			Add d
R5	B2 B66A RR BR 4 R 1 D1A	15	15	1	3	B	d 4			Add d
A1	MT64 A	35.1	16.1	56	4	r	4			Add d
A2	DB 46 65 A Y	2	1	3	5	r	4		R	d
MP6A	R D 662 P 4	2	15.		M	r				Add d

S r B  
 Sr r T M  
 M E 1 3.


1 63 6

12 2 22


P 2



Plan View

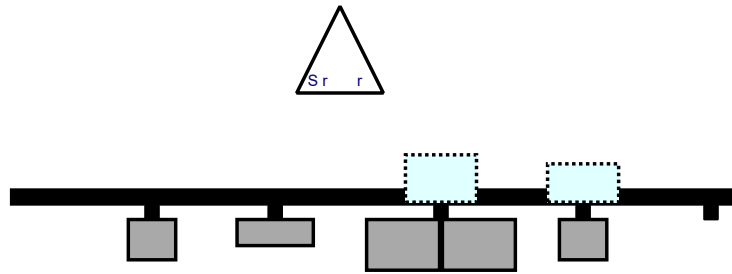

Front View - L Sr r

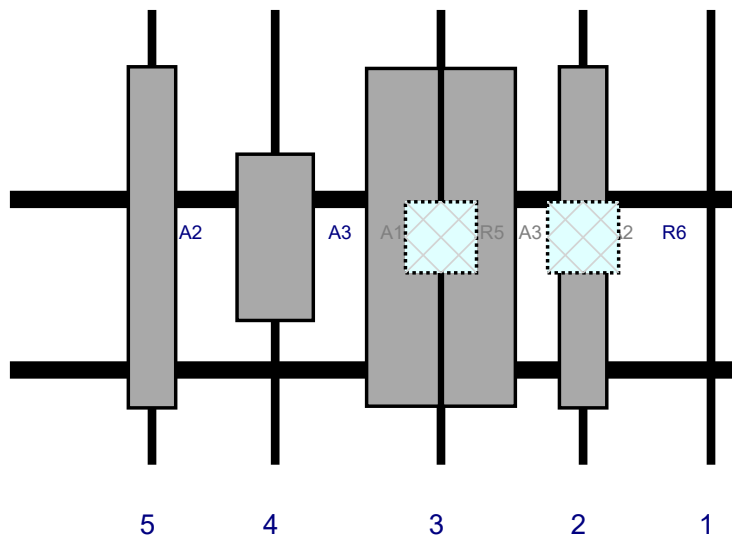

R	M d	d	D	P	P	A	.A	A	S	d
		r	L.	P	P	P	r	T.	O	
A2	DB 46 65 A Y	2	1	121	2	r	4		R	d
R6	B5 B13 RR BR 4 R 1 D2A	15	15	121	2	B	d 4		Add	d
A3	M 6 RO66 3	1.3	15.4	1	3	r	4		Add	d
A3	M 6 RO66 3	1.3	15.4	1	3	r	4		Add	d
R5	B2 B66A RR BR 4 R 1 D1A	15	15	1	3	B	d 4		Add	d
A1	MT64 A	35.1	16.1	56	4	r	4		Add	d
A2	DB 46 65 A Y	2	1	3	5	r	4		R	d

S r C  
 Sr r T M  
 M E 1 3.


1 63 6

12 2 22


P 3



Plan View

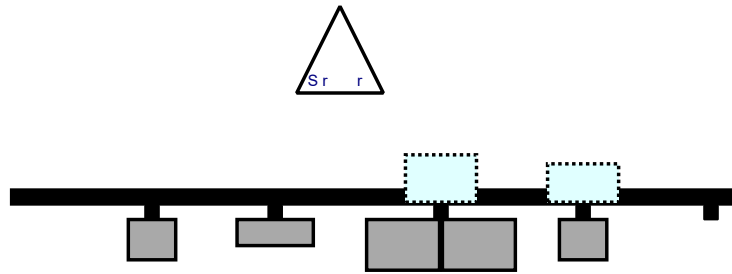

Front View - L Sr r

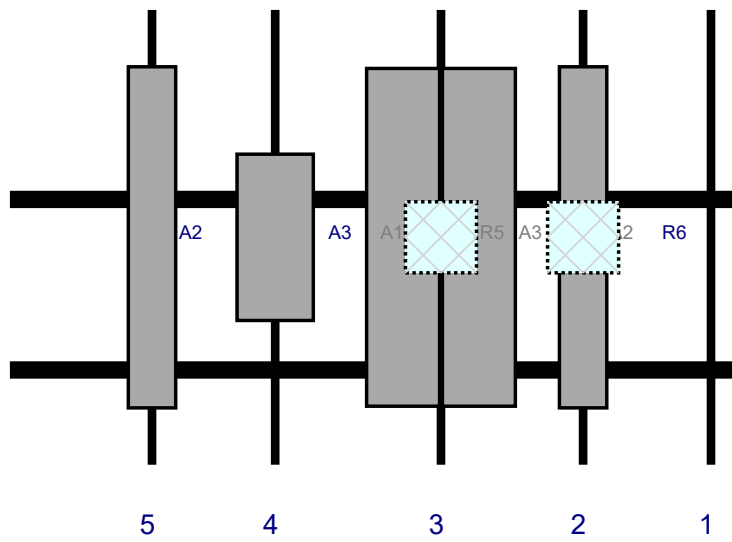

R	M d	d	D	P	P	A	.A	A	S	d
		r	L.	P	P	P	r	T.	O	
A2	DB 46 65 A Y	2	1	121	2	r	4		R	d
R6	B5 B13 RR BR 4 R 1 D2A	15	15	121	2	B	d 4		Add	d
A3	M 6 RO66 3	1.3	15.4	1	3	r	4		Add	d
A3	M 6 RO66 3	1.3	15.4	1	3	r	4		Add	d
R5	B2 B66A RR BR 4 R 1 D1A	15	15	1	3	B	d 4		Add	d
A1	MT64 A	35.1	16.1	56	4	r	4		Add	d
A2	DB 46 65 A Y	2	1	3	5	r	4		R	d





MOUNT MODIFICATION DRAWINGS  
EXISTING 12.83' PLATFORM

TOWER OWNER: CROWN CASTLE  
TOWER OWNER SITE NUMBER: 806359

CARRIER SITE NAME: MILFORD CT  
CARRIER SITE NUMBER: 467373  
FUZE ID: 16231875

423 ORONOQUE RD  
MILFORD, CT 06460  
NEW HAVEN COUNTY

LATITUDE: 41.237875° N  
LONGITUDE: 73.086219° W

DESIGN CRITERIA
<b>WIND LOADS</b> BASIC WIND SPEED (3 SECOND GUST), V = 119 MPH EXPOSURE CATEGORY C TOPOGRAPHIC CATEGORY I MEAN BASE ELEVATION (AMSL) = 167.39'
<b>ICE LOADS</b> ICE WIND SPEED (3 SECOND GUST), V = 50 MPH ICE THICKNESS = 1.00 IN
<b>SEISMIC LOADS</b> SEISMIC DESIGN CATEGORY B SHORT TERM MCER GROUND MOTION, S <sub>s</sub> = .203 LONG TERM MCER GROUND MOTION, S <sub>l</sub> = .054

PROJECT INFORMATION
<b>APPLICANT/LESSEE</b> COMPANY: VERIZON WIRELESS  <b>CLIENT REPRESENTATIVE</b> COMPANY: VERIZON WIRELESS  <b>PROJECT MANAGER</b> COMPANY: MASER CONSULTING CONTACT: PETER ALBANO PHONE: 856-797-0412 E-MAIL: PETER.ALBANO@COLLIERENGINEERING.COM

SHEET INDEX	
SHEET	DESCRIPTION
ST-1	TITLE SHEET
SBOM-1	BILL OF MATERIALS
SGN-1	GENERAL NOTES
SCF-1	CLIMBING FACILITY DETAIL
SS-1	MODIFICATION DETAILS
SS-2	MOUNT PHOTOS
	SPECIFICATION SHEETS

CONTRACTOR PMI REQUIREMENTS	
PMI LOCATION:	HTTPS://PMI.VZWSMART.COM
SMART TOOL PROJECT #:	10063096
VZW LOCATION CODE (PSLC):	467373
ANALYSIS DATE:	1/24/2022
PMI REQUIREMENTS EMBEDDED WITHIN MOUNT MODIFICATION REPORT	


**COPYRIGHT ©2022  
MASER CONSULTING CONNECTICUT  
ALL RIGHTS RESERVED**

THIS DRAWING AND ALL THE INFORMATION CONTAINED HEREIN IS AUTHORIZED FOR USE ONLY BY THE PARTY FOR WHOM THE WORK WAS CONTRACTED OR TO WHOM IT IS CERTIFIED. THIS DRAWING MAY NOT BE COPIED, REUSED, DISCLOSED, DISTRIBUTED OR RELIED UPON FOR ANY OTHER PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF MASER CONSULTING

WILL BE KNOWN AS COLLIER ENGINEERING & DESIGN IN 2021  
Customer Loyalty through Client Satisfaction  
www.maserconsulting.com  
Office Locations:


- NEW JERSEY
- NEW YORK
- PENNSYLVANIA
- VIRGINIA
- FLORIDA
- NORTH CAROLINA
- SOUTH CAROLINA
- NEW MEXICO
- MARYLAND
- GEORGIA
- TEXAS
- TENNESSEE
- COLORADO

MASER CONSULTING, C.O.A. #: JPC.0000131  
Copyright © 2022, Maser Consulting All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting.



**811** PROTECT YOURSELF  
ALL STATES REQUIRE NOTIFICATION OF EXCAVATIONS, DESIGNERS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE  
Know what's below.  
Call before you dig.  
FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM

SCALE: AS SHOWN	JOB NUMBER: 21777070A			
0	1/24/2022	ISSUED FOR CONSTRUCTION	SC	EA
REV	DATE	DESCRIPTION	DRAWN BY	CHECKED BY



IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF THE RESPONSIBLE LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

**SITE NAME:**  
  
MILFORD CT  
467373  
423 ORONOQUE RD  
MILFORD, CT 06460  
NEW HAVEN COUNTY

STAMFORD OFFICE  
1055 Washington Boulevard  
Stamford, CT 06901  
Phone: 203.324.0800

SHEET TITLE:  
**TITLE SHEET**

SHEET NUMBER:  
**ST-1**



**PROJECT NOTES**

- SEE MODIFICATION NOTES
- THE CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE CODES, ORDINANCES, LAWS AND REGULATIONS OF ALL MUNICIPALITIES, UTILITY COMPANIES OR OTHER PUBLIC/GOVERNING AUTHORITIES.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL PERMITS AND INSPECTIONS THAT MAY BE REQUIRED BY ANY FEDERAL, STATE, COUNTY OR MUNICIPAL AUTHORITIES.
- THE CONTRACTOR SHALL NOTIFY THE CONSTRUCTION MANAGER, IN WRITING, OF ANY CONFLICTS, ERRORS OR OMISSIONS PRIOR TO THE SUBMISSION OF BIDS OR PERFORMANCE OF WORK.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING ALL EXISTING SITE IMPROVEMENTS PRIOR TO COMMENCING CONSTRUCTION. THE CONTRACTOR SHALL REPAIR ANY DAMAGE AS A RESULT OF CONSTRUCTION OF THIS FACILITY AT THE CONTRACTOR'S EXPENSE TO THE SATISFACTION OF THE OWNER.
- THE SCOPE OF WORK FOR THIS PROJECT SHALL INCLUDE PROVIDING ALL MATERIALS, EQUIPMENT AND LABOR REQUIRED TO COMPLETE THIS PROJECT. ALL EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
- THE CONTRACTOR SHALL VISIT THE PROJECT SITE PRIOR TO SUBMITTING THE BID TO VERIFY THAT THE PROJECT CAN BE CONSTRUCTED IN ACCORDANCE WITH THE CONTRACT DOCUMENTS AND CONSTRUCTION DRAWINGS.
- THE CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS PRIOR TO COMMENCING ANY WORK. ALL DIMENSIONS OF EXISTING CONSTRUCTION SHOWN ON THESE DRAWINGS MUST BE VERIFIED. THE CONTRACTOR SHALL NOTIFY THE CONSTRUCTION MANAGER OF ANY DISCREPANCIES PRIOR TO ORDERING MATERIAL OR PROCEEDING WITH CONSTRUCTION.
- SINCE THE CELL SITE MAY BE ACTIVE, ALL SAFETY PRECAUTIONS MUST BE TAKEN WHEN WORKING AROUND HIGH LEVELS OF ELECTROMAGNETIC RADIATION. EQUIPMENT SHOULD BE SHUTDOWN PRIOR TO PERFORMING ANY WORK THAT COULD EXPOSE THE WORKERS TO DANGER. PERSONAL RF EXPOSURE MONITORS ARE REQUIRED TO BE WORN TO ALERT OF ANY POTENTIALLY DANGEROUS EXPOSURE LEVELS.
- NO NOISE, SMOKE, DUST OR ODOR WILL RESULT FROM THIS FACILITY AS TO CAUSE A NUISANCE.
- THE FACILITY IS UNMANNED AND NOT FOR HUMAN HABITATION (NO HANDICAP ACCESS IS REQUIRED).

**GENERAL NOTES**

- THESE MODIFICATIONS HAVE BEEN DESIGNED IN ACCORDANCE WITH THE GOVERNING PROVISIONS OF THE TELECOMMUNICATIONS INDUSTRY STANDARD TIA-222-H. MATERIALS AND SERVICES PROVIDED BY THE CONTRACTOR SHALL CONFORM TO THE ABOVE MENTIONED CODES.
- CONTRACTOR SHALL TAKE ALL PRECAUTIONS NECESSARY TO PREVENT DAMAGE TO EXISTING STRUCTURES. ANY DAMAGE TO EXISTING STRUCTURES AS A RESULT OF THE CONTRACTOR'S WORK OR FROM DAMAGE DUE TO OTHER CAUSES SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE TO THE SATISFACTION OF THE OWNER.
- CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS BEFORE BEGINNING WORK, ORDERING MATERIAL, AND PREPARING OF SHOP DRAWINGS. ANY DISCREPANCIES BETWEEN FIELD CONDITIONS AND THE CONTRACT DOCUMENTS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ENGINEER. IF THE CONTRACTOR DISCOVERS ANY EXISTING CONDITIONS THAT ARE NOT REPRESENTED ON THESE DRAWINGS, OR ANY CONDITIONS THAT WOULD INTERFERE WITH THE INSTALLATION OF THE MODIFICATIONS, NOTIFY THE ENGINEER IMMEDIATELY.
- IT IS ASSUMED THAT ANY STRUCTURAL MODIFICATION WORK SPECIFIED ON THESE PLANS WILL BE ACCOMPLISHED BY KNOWLEDGEABLE WORKMEN WITH TOWER CONSTRUCTION EXPERIENCE.
- THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE WORK AND SHALL BE SOLELY RESPONSIBLE FOR ALL CONSTRUCTION METHODS, MEANS, TECHNIQUES, SEQUENCES, AND PROCEDURES.
- ALL CONSTRUCTION MEANS AND METHODS, INCLUDING BUT NOT LIMITED TO, ERECTION PLANS, RIGGING PLANS, CLIMBING PLANS, AND RESCUE PLANS SHALL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR RESPONSIBLE FOR THE EXECUTION OF THE WORK CONTAINED HEREIN AND SHALL MEET ANSII/TIA-322 (LATEST EDITION), OSHA, AND GENERAL INDUSTRY STANDARDS. ALL RIGGING PLANS SHALL ADHERE TO ANSII/TIA-322 (LATEST EDITION) INCLUDING THE REQUIRED INVOLVEMENT OF A QUALIFIED ENGINEER FOR CLASS IV CONSTRUCTION.
- THE CONTRACTOR IS SOLELY RESPONSIBLE FOR INITIATING, MAINTAINING, AND SUPERVISING ALL SAFETY PROGRAMS IN ACCORDANCE WITH APPLICABLE SAFETY CODES.
- WORK SHALL ONLY BE PERFORMED DURING CALM DRY DAYS (WINDS LESS THAN 30-MPH). THE STRUCTURE SHOWN ON THE DRAWINGS IS STRUCTURALLY SOUND ONLY IN THE COMPLETED FORM. THE

CONTRACTOR SHALL BE RESPONSIBLE FOR THE STRENGTH AND STABILITY OF THE STRUCTURE DURING ERECTION. CONTRACTOR SHALL PROVIDE TEMPORARY SUPPORT, SHORING, BRACING AND ANY OTHER STRUCTURAL SYSTEMS AS REQUIRED TO RESIST ALL FORCES THAT MAY OCCUR DURING HANDLING AND ERECTION UNTIL THE STRUCTURE IS FULLY COMPLETED. TEMPORARY SUPPORTS, BRACING AND OTHER STRUCTURAL SYSTEMS REQUIRED DURING CONSTRUCTION SHALL REMAIN THE CONTRACTOR'S PROPERTY AFTER THEIR USE.

- ALL INSTALLATIONS PERFORMED ON THIS STRUCTURE SHALL BE COMPLETED IN ACCORDANCE WITH THE GOVERNING PROVISIONS OF THE STANDARD FOR INSTALLATION, ALTERATION AND MAINTENANCE OF ANTENNA SUPPORTING STRUCTURES AND ANTENNAS, ANSII/TIA-322.
- CONTRACTOR SHALL SECURE SITE BACK TO EXISTING CONDITION UNDER SUPERVISION OF OWNER. ALL FENCE, STONE, GEOFABRIC, GROUNDING, AND SURROUNDING GRADE SHALL BE REPLACED AND REPAIRED AS REQUIRED TO ACHIEVE OWNER APPROVAL. POSITIVE DRAINAGE AWAY FROM TOWER SITE SHALL BE MAINTAINED.
- CONNECTIONS BETWEEN ITEMS SUPPORTED BY THE STRUCTURE AND THE STRUCTURE NOT SPECIFICALLY DETAILED IN THE CONTRACT DOCUMENTS ARE THE RESPONSIBILITY OF THE CONTRACTOR. SUCH CONNECTIONS SHALL BE DESIGNED, COORDINATED AND INSPECTED BY A PROFESSIONAL STRUCTURAL ENGINEER LICENSED IN THE STATE OF THE PROJECT. SUBMIT SIGNED AND SEALED CALCULATIONS DURING SHOP DRAWING REVIEW.
- DO NOT SCALE DRAWINGS.
- DO NOT USE THESE DRAWINGS FOR ANY OTHER SITE.
- ALL MATERIAL UTILIZED FOR THIS PROJECT MUST BE NEW AND FREE OF ANY DEFECTS. ANY MATERIAL SUBSTITUTIONS, INCLUDING BUT NOT LIMITED TO ALTERED SIZE AND/OR STRENGTHS, MUST BE APPROVED BY THE OWNER AND ENGINEER IN WRITING.
- THE MOUNT UNDER NO CIRCUMSTANCES SHOULD BE USED AS A TIE OFF POINT.

**STRUCTURAL STEEL**

- DESIGN, DETAILING, FABRICATION AND ERECTION OF STRUCTURAL STEEL SHALL CONFORM TO THE FOLLOWING PUBLICATIONS EXCEPT AS SPECIFICALLY INDICATED IN THE CONTRACT DOCUMENTS.
  - AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC) MANUAL OF STEEL CONSTRUCTION (15TH EDITION)
  - SPECIFICATION FOR STRUCTURAL JOINTS USING ASTM A325 OR A490 BOLTS
  - AISC CODE OF STANDARD PRACTICE
- STRUCTURAL STEEL SHALL CONFORM TO THE FOLLOWING UNLESS OTHERWISE SHOWN:
 

CHANNELS, ANGLES, PLATES, ETC.	ASTM A36 (GR 36)
STEEL PIPE	ASTM A53 (GR 35)
BOLTS	ASTM A325
NUTS	ASTM A563
LOCK WASHERS	LOCKING STRUCTURAL GRADE

- ALL SUBSTITUTIONS PROPOSED BY THE CONTRACTOR SHALL BE APPROVED IN WRITING BY THE ENGINEER. CONTRACTOR SHALL PROVIDE DOCUMENTATION TO ENGINEER FOR VERIFYING THE SUBSTITUTE IS SUITABLE FOR USE AND MEETS ORIGINAL DESIGN CRITERIA. DIFFERENCES FROM THE ORIGINAL DESIGN, INCLUDING MAINTENANCE, REPAIR AND REPLACEMENT, SHALL BE NOTED. ESTIMATES OF COSTS/CREDITS ASSOCIATED WITH THE SUBSTITUTION (INCLUDING RE-DESIGN COSTS AND COSTS TO SUB-CONTRACTORS) SHALL BE PROVIDED TO THE ENGINEER. CONTRACTOR SHALL PROVIDE ADDITIONAL DOCUMENTATION AND/OR SPECIFICATIONS TO THE ENGINEER AS REQUESTED.
- PROVIDE STRUCTURAL STEEL SHOP DRAWINGS TO ENGINEER FOR APPROVAL PRIOR TO FABRICATION.
  - SUBMIT SHOP DRAWINGS TO  
PETER.ALBANO@COLLIERSENGINEERING.COM
  - PROVIDE MASER CONSULTING PROJECT # AND MASER CONSULTING PROJECT ENGINEER CONTACT IN THE BODY OF THE EMAIL.
- DRILL NO HOLES IN ANY NEW OR EXISTING STRUCTURAL STEEL MEMBERS OTHER THAN THOSE SHOWN ON STRUCTURAL DRAWINGS WITHOUT THE APPROVAL OF THE ENGINEER OF RECORD.
- GALVANIZED ASTM A325 BOLTS SHALL NOT BE REUSED.
- ALL NEW STEEL SHALL BE HOT BE DIPPED GALVANIZED FOR FULL WEATHER PROTECTION. IN ADDITION ALL NEW STEEL SHALL BE PAINTED TO MATCH EXISTING STEEL. CONTRACTOR SHALL OBTAIN WRITTEN PERMISSION TO PROTECT STEEL BY ANY OTHER MEANS.
- CONTRACTOR SHALL PROTECT CUT ENDS OF ALL FIELD-CUT STEEL WITH TWO (2) COATS OF COLD GALVANIZATION (ZINGA OR ZINC COTE).
- ALL BOLT ASSEMBLIES FOR STRUCTURAL MEMBERS REPRESENTED IN THIS DRAWING REQUIRE LOCKING DEVICES TO BE INSTALLED IN ACCORDANCE WITH TIA-222-H SECTION 4.9.2 REQUIREMENTS.
- WHERE CONNECTIONS ARE NOT FULLY DETAILED ON THESE DRAWINGS, FABRICATOR SHALL DESIGN CONNECTIONS TO RESIST LOADS AND FORCES WHERE SHOWN ON DRAWINGS AND AS OUTLINED IN SPECIFICATIONS.
- FOR MEMBERS BEING REPLACED, PROVIDE NEW BOLTS AND MATCH EXISTING SIZE AND GRADE. MAINTAIN AISC REQUIREMENTS FOR MINIMUM BOLT DISTANCE AND SPACING.


- ALL PROPOSED AND/OR REPLACED BOLTS SHALL BE OF SUFFICIENT LENGTH SUCH THAT THE END OF THE BOLT IS AT LEAST FLUSH WITH THE FACE OF THE NUT. IT IS NOT PERMITTED FOR THE BOLT END TO BE BELOW THE FACE OF THE NUT AFTER TIGHTENING IS COMPLETED.
- GALVANIZED ASTM A325 BOLTS SHALL NOT BE REUSED.
- ALL EXISTING PAINTED/GALVANIZED SURFACES DAMAGED DURING REHAB INCLUDING AREAS UNDER STIFFENER PLATES SHALL BE WIRE BRUSHED CLEAN, REPAIRED BY COLD GALVANIZING (ZINGA OR ZINC COTE), AND REPAINTED TO MATCH THE EXISTING FINISH (IF APPLICABLE).
- ALL HOLES IN STEEL MEMBERS SHALL BE SIZED 1/16" LARGER THAN THE BOLT DIAMETER. STANDARD HOLES SHALL BE USED UNLESS NOTED OTHERWISE.

**WELDING NOTES**

- ALL WELDING SHALL BE DONE IN ACCORDANCE WITH AWS D1.0 (LATEST EDITION). THIS SHALL INCLUDE A CERTIFIED WELD INSPECTION (CWI) FOR ACCEPTANCE OR REJECTION OF ALL WELDING OPERATIONS, PRE, DURING, AND POST INSTALLATION, USING THE ACCEPTANCE CRITERIA OF AWS D1.1.
- CONTRACTOR IS RESPONSIBLE FOR COMMISSIONING A THIRD PARTY CERTIFIED WELD INSPECTOR (CWI) THROUGHOUT THE ENTIRETY OF THE PROJECT. A PASSING CWI REPORT SHALL BE PROVIDED TO THE ENGINEER UPON COMPLETION OF THE PROJECT.
- THE CERTIFIED WELD INSPECTOR SHALL INDICATE, IN A WRITTEN CWI REPORT, THAT ALL WELDING OPERATIONS, DURING, AND POST INSTALLATION WERE CONDUCTED IN ACCORDANCE WITH AWS D1.1 WITH PHOTOGRAPHS AND DOCUMENTATION SUPPORTING THE ACCEPTANCE OR REJECTION OF ALL WELDING. ALL CWI WELD INSPECTION DOCUMENTATION AND PHOTOS SHALL BE SUBMITTED DURING THE PMI.
- IN CASES WHERE A WELD IS SPECIFIED BETWEEN TWO MEMBERS IN WHICH THERE IS A GAP IN BETWEEN, THE WELD IS TO BE BUILT-UP SUCH THAT THE SIZE OF WELD ON THE MEMBER IS EQUAL TO THAT SHOWN IN THE DRAWINGS.
- OXY FUEL GAS WELDING OR BRAZING IS STRICTLY PROHIBITED. SPECIFICALLY, NO TORCH CUTTING IS PERMITTED ON SITE. ALL HOLES SHALL BE CUT WITH A GRINDER.
- CONTRACTOR SHALL EXERCISE CAUTION WHEN WELDING A GALVANIZED SURFACE.


BOLT SCHEDULE (IN.)				
BOLT DIAMETER	STANDARD HOLE	SHORT SLOT	MIN. EDGE DISTANCE	SPACING
1/2	9/16	9/16 x 11/16	7/8	1 1/2
5/8	11/16	11/16 x 7/8	1 1/8	1 7/8
3/4	13/16	13/16 x 1	1 1/4	2 1/4
7/8	15/16	15/16 x 1 1/8	1 1/2	2 5/8
1	1 1/16	1 1/16 x 1 5/16	1 3/4	3

WORKABLE GAGES (IN.)	
LEG	GAGE
4	2 1/2
3 1/2	2
3	1 3/4
2 1/2	1 3/8
2	1 1/8



**TYP. BOLT ASSEMBLY**

- NOTES:**
- ALL DIMENSIONS REPRESENTED IN THE ABOVE TABLES ARE AISC MINIMUM REQUIREMENTS. CONTRACTOR SHALL VERIFY EXISTING CONDITIONS IN FIELD AND NOTIFY ENGINEER IF DISTANCES ARE LESS THAN THOSE PROVIDED.
  - THE DIMENSIONS PROVIDED ARE MINIMUM REQUIREMENTS. ACTUAL DIMENSIONS OF PROPOSED MEMBERS WITHIN THESE DRAWINGS MAY VARY FROM THE AISC MINIMUM REQUIREMENTS.
  - SHORT SLOT HOLES SHALL ONLY BE USED WHEN DEPICTED IN THE DRAWINGS
  - MATCH EXISTING GAGES WHEN APPLICABLE, UNLESS MINIMUM EDGE DISTANCES ARE COMPROMISED.

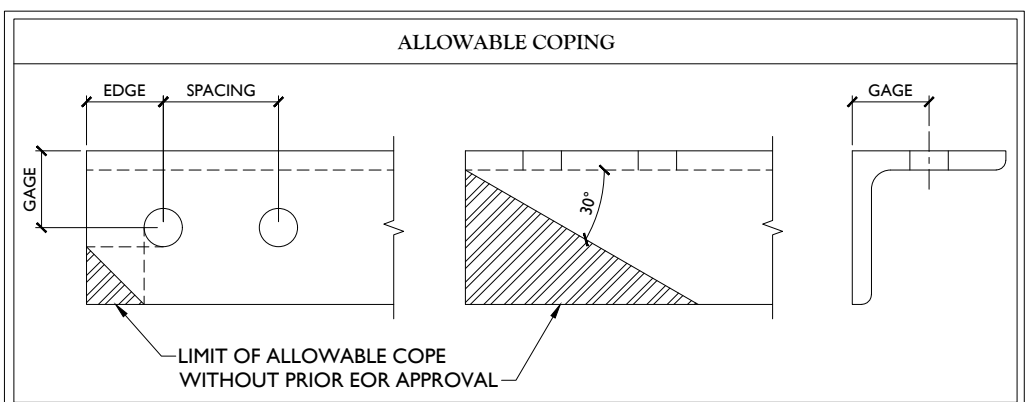

**MASER CONSULTING CONNECTICUT**  
 WILL BE KNOWN AS COLLIER ENGINEERING & DESIGN IN 2021  
 Customer Loyalty through Client Satisfaction  
 www.maserconsulting.com  
 Office Locations:  
 ■ NEW JERSEY ■ NEW MEXICO  
 ■ NEW YORK ■ MARYLAND  
 ■ PENNSYLVANIA ■ GEORGIA  
 ■ VIRGINIA ■ TEXAS  
 ■ FLORIDA ■ TENNESSEE  
 ■ NORTH CAROLINA ■ COLORADO  
 ■ SOUTH CAROLINA  
 MASER CONSULTING, C.O.A. #: JPC000131  
 Copyright © 2022, Maser Consulting All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting.

**PROTECT YOURSELF**  
 ALL STATES REQUIRE NOTIFICATION OF EXCAVATIONS. DESIGNERS OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE  
 Know what's below.  
 Call before you dig.  
 FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT:  
 WWW.CALL811.COM

SCALE:	AS SHOWN	JOB NUMBER:	21777070A
REV	DATE	DESCRIPTION	DRAWN BY / CHECKED BY
0	1/24/2022	ISSUED FOR CONSTRUCTION	SC / EA

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF THE RESPONSIBLE LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.


**SITE NAME:**  
 MILFORD CT  
 467373  
 423 ORONOQUE RD  
 MILFORD, CT 06460  
 NEW HAVEN COUNTY

**STAMFORD OFFICE**  
 1055 Washington Boulevard  
 Stamford, CT 06901  
 Phone: 203.324.0800

SHEET TITLE:  
**MODIFICATION NOTES**

SHEET NUMBER:  
**SGN-1**



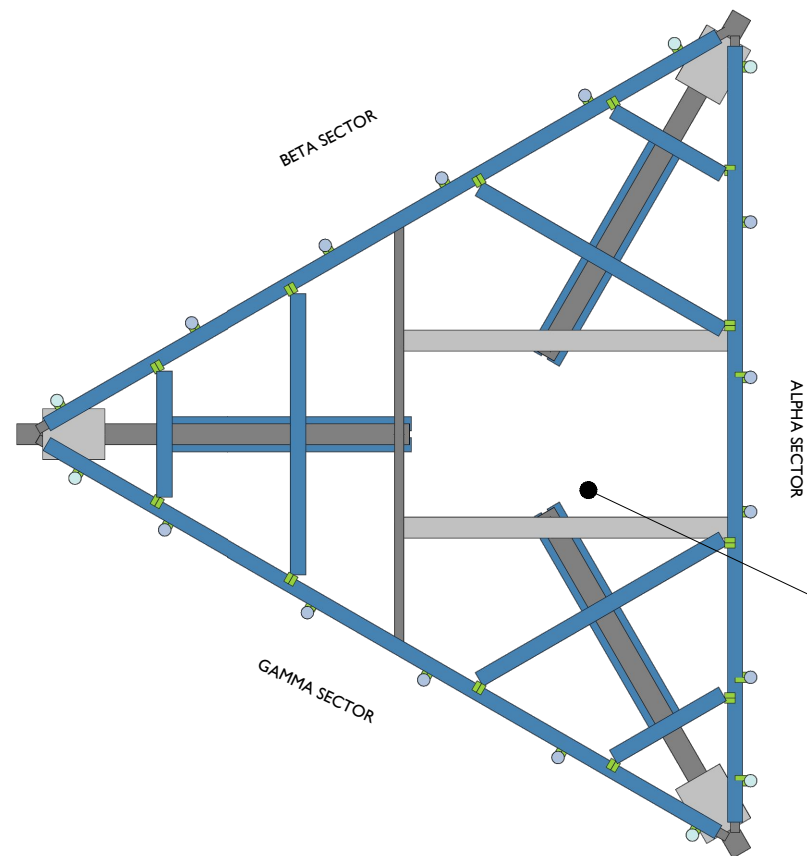

Existing Climbing Facility

Existing Climbing Facility



CLIMBING FACILITY PHOTO

**1** CLIMBING FACILITY LOCATION  
SCALE : N.T.S.

**STRUCTURAL NOTES:**

1. CONTRACTOR TO INSPECT CLIMBING FACILITIES AT SITE AND ENSURE THAT THE SAFETY CLIMB IS IN GOOD CONDITION, INSTALL NEW WIRE ROPE AND ENSURE IT DOES NOT OR WILL NOT INTERFERE WITH THE EXISTING OR PROPOSED MOUNT CONNECTIONS. CONTRACTOR SHALL INSTALL SAFETY CLIMB WIRE ROPE GUIDED AROUND MOUNT CONNECTIONS AS NEEDED.
2. INSTALL SHALL NOT CAUSE HARM TO THE STRUCTURE, CLIMBING FACILITY, SAFETY CLIMB, OR ANY SYSTEM INSTALLED ON THE STRUCTURE. TIMELY NOTICE AND DOCUMENTATION SHALL BE PROVIDED BY CONTRACTORS TO THE EOR (OF STRUCTURAL DESIGN) IF AN OBSTRUCTION WAS REQUIRED TO MEET THE RF SYSTEM DESIGN REQUIREMENTS AND PERFORMANCES.

**MASER CONSULTING CONNECTICUT**  
 WILL BE KNOWN AS COLLIER ENGINEERING & DESIGN IN 2021  
 Customer Loyalty through Client Satisfaction  
 www.maserconsulting.com  
 Office Locations:  
 ■ NEW JERSEY ■ NEW MEXICO  
 ■ NEW YORK ■ MARYLAND  
 ■ PENNSYLVANIA ■ GEORGIA  
 ■ VIRGINIA ■ TEXAS  
 ■ FLORIDA ■ TENNESSEE  
 ■ NORTH CAROLINA ■ COLORADO  
 ■ SOUTH CAROLINA  
 MASER CONSULTING, C.O.A. #: JPC.0000131  
 Copyright © 2022, Maser Consulting All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting.



**811** PROTECT YOURSELF  
 ALL STATES REQUIRE NOTIFICATION OF EXCAVATIONS, DESIGNERS OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE  
 Know what's below. Call before you dig.  
 FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM

SCALE:	AS SHOWN	JOB NUMBER:	21777070A
REV	DATE	DESCRIPTION	DRAWN BY / CHECKED BY
0	1/24/2022	ISSUED FOR CONSTRUCTION	SC / EA

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF THE RESPONSIBLE LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

**SITE NAME:**  
 MILFORD CT  
 467373  
 423 ORONOQUE RD  
 MILFORD, CT 06460  
 NEW HAVEN COUNTY

**MASER CONSULTING**  
 STAMFORD OFFICE  
 1055 Washington Boulevard  
 Stamford, CT 06901  
 Phone: 203.324.0800

SHEET TITLE:  
 CLIMBING FACILITY DETAIL

SHEET NUMBER:  
 SCF-1

**LEGEND:**

- PROPOSED
- RELOCATED
- EXISTING

MOUNT MODIFICATION SCHEDULE				
NO.	ELEVATION	QUANTITY	DESCRIPTION	NOTES
1		1	PROPOSED SUPPORT RAIL KIT (PART #: VZWSMART-PLK1)	RADIO AND/OR TME POSITIONS SHALL BE ADJUSTED VERTICALLY AS NEEDED IN ORDER TO ACHIEVE INSTALLATION OF HORIZONTAL AS SHOWN. EOR SHALL BE NOTIFIED IF EQUIPMENT NEEDS TO BE RELOCATED TO ANOTHER MOUNT PIPE. CONTRACTOR TO VERIFY THE LENGTH REQUIRED AND TRIM AS NECESSARY IN ACCORDANCE WITH THE 'STRUCTURAL STEEL' NOTES ON SHEET SGN-1.
2		1	PROPOSED PLATFORM SUPPORT RAIL BRACING KIT (PART #: VZWSMART-PLK2)	CONTRACTOR TO VERIFY THE LENGTH REQUIRED AND TRIM AS NECESSARY IN ACCORDANCE WITH THE 'STRUCTURAL STEEL' NOTES ON SHEET SGN-1
3	103'-0"	1	PROPOSED KICKER KIT (PART #: VZWSMART-PLK5)	CONTRACTOR TO VERIFY THE LENGTH REQUIRED AND TRIM AS NECESSARY IN ACCORDANCE WITH THE 'STRUCTURAL STEEL' NOTES ON SHEET SGN-1. CONNECT OTHER END OF KICKER KIT TO MONOPOLE COLLAR MOUNT ASSEMBLY (PART #: VZWSMART-PLK7).
4		6	RELOCATED MOUNT PIPE	CONNECT RELOCATED MOUNT PIPE TO EXISTING CHANNEL HORIZONTAL WITH (2) 1/2" DIA. U-BOLTS. CONNECT TO SUPPORT RAIL WITH CROSSOVER PLATES (PART #: VZWSMART-MSK1). CONTRACTOR TO DRILL HOLES AS REQUIRED.
5		3	PROPOSED 96" LONG, P2 1/2 STD (PART #: VZWSMART-P40-278X096)	CONNECT NEW MOUNT PIPE TO EXISTING CHANNEL HORIZONTAL WITH (2) 1/2" DIA. U-BOLTS.
6		9	PROPOSED 96" LONG, P2 STD (PART #: VZWSMART-P40-238X096)	CONNECT NEW MOUNT PIPE TO EXISTING CHANNEL HORIZONTAL WITH (2) 1/2" DIA. U-BOLTS. CONTRACTOR TO DRILL HOLES AS REQUIRED.

**NOTES:**

MOUNT MEMBERS NOT SHOWN FOR CLARITY U.N.O.  
 CONTRACTOR SHALL REMOVE EXISTING SUPPORT RAIL ANGLES, CORNER PIPES, MOUNT PIPES (EXCEPT RELOCATED MOUNT PIPES) AND INTERMEDIATE HORIZONTAL ANGLES PRIOR TO INSTALLATION OF PROPOSED MODIFICATION KITS.

**MASER CONSULTING CONNECTICUT**

WILL BE KNOWN AS COLLIER ENGINEERING & DESIGN IN 2021  
 Customer Loyalty through Client Satisfaction  
 www.maserconsulting.com  
 Office Locations:

■ NEW JERSEY	■ NEW MEXICO
■ NEW YORK	■ MARYLAND
■ PENNSYLVANIA	■ GEORGIA
■ VIRGINIA	■ TEXAS
■ FLORIDA	■ TENNESSEE
■ NORTH CAROLINA	■ COLORADO
■ SOUTH CAROLINA	

MASER CONSULTING, C.O.A. #: JPC.0000131  
 Copyright © 2022, Maser Consulting All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting.



**811** PROTECT YOURSELF

ALL STATES REQUIRE NOTIFICATION OF EXCAVATIONS, DESIGNERS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE

Know what's below.  
Call before you dig.

FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT:  
WWW.CALL811.COM

SCALE: AS SHOWN		JOB NUMBER: 21777070A	
0	1/24/2022	ISSUED FOR CONSTRUCTION	SC EA
REV	DATE	DESCRIPTION	DRAWN BY CHECKED BY

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF THE RESPONSIBLE LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

**SITE NAME:**


**MILFORD CT  
467373**

**423 ORONOQUE RD  
MILFORD, CT 06460  
NEW HAVEN COUNTY**


**STAMFORD OFFICE**  
 1055 Washington Boulevard  
 Stamford, CT 06901  
 Phone: 203.324.0800

SHEET TITLE:  
**MODIFICATION DETAILS**

SHEET NUMBER:  
**SS-1**

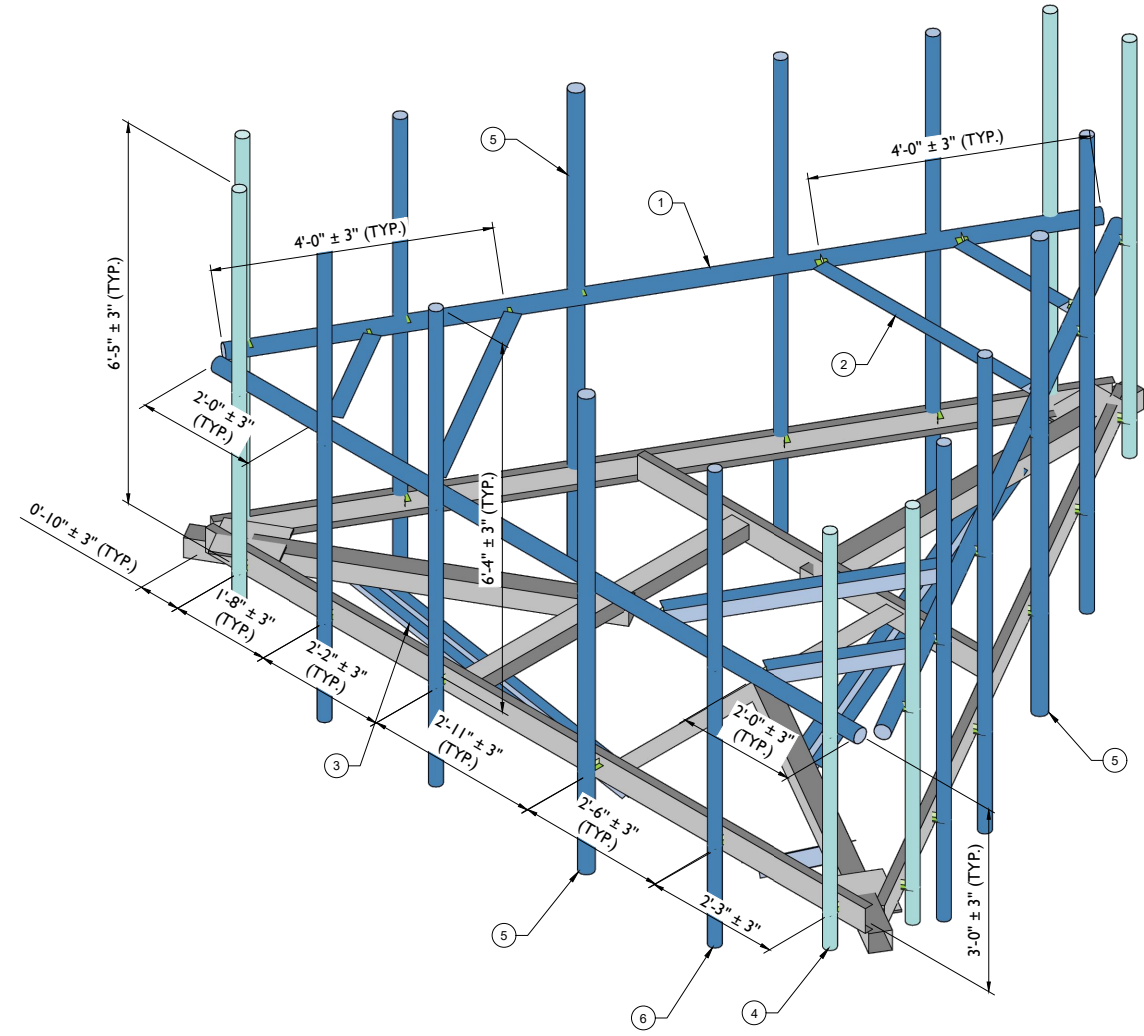

**1** PROPOSED ISOMETRIC VIEW  
SCALE : N.T.S.

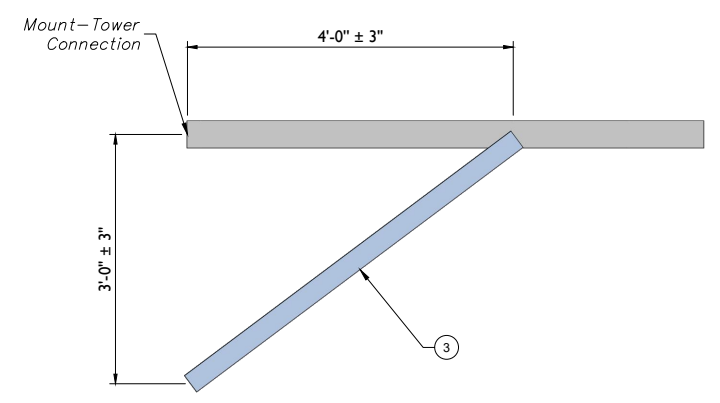

**2** PROPOSED SIDE ELEVATION VIEW (TYP. ALL SECTORS)  
SCALE : N.T.S.





MOUNT PHOTO 1



MOUNT PHOTO 2



MOUNT PHOTO 3



MOUNT PHOTO 4



WILL BE KNOWN AS COLLIER ENGINEERING & DESIGN IN 2021  
 Customer Loyalty through Client Satisfaction  
 www.maserconsulting.com  
 Office Locations:

- NEW JERSEY
- NEW YORK
- PENNSYLVANIA
- VIRGINIA
- FLORIDA
- NORTH CAROLINA
- SOUTH CAROLINA
- NEW MEXICO
- MARYLAND
- GEORGIA
- TEXAS
- TENNESSEE
- COLORADO

MASER CONSULTING, C.O.A. #: JPC.0000131  
 Copyright © 2021 Maser Consulting All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting.



**811** PROTECT YOURSELF  
 ALL STATES REQUIRE NOTIFICATION OF EXCAVATORS, DESIGNERS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE  
 Know what's below. Call before you dig.  
 FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM

SCALE: AS SHOWN JOB NUMBER: 21777070A

REV	DATE	DESCRIPTION	DRAWN BY	CHECKED BY
0	1/24/2022	ISSUED FOR CONSTRUCTION	SC	EA


IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF THE RESPONSIBLE LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

**SITE NAME:**  
  
 MILFORD CT  
 467373  
 423 ORONOQUE RD  
 MILFORD, CT 06460  
 NEW HAVEN COUNTY


**STAMFORD OFFICE**  
 1055 Washington Boulevard  
 Stamford, CT 06901  
 Phone: 203.324.0800

SHEET TITLE:  
 MOUNT PHOTOS


SHEET NUMBER:  
 SS-2

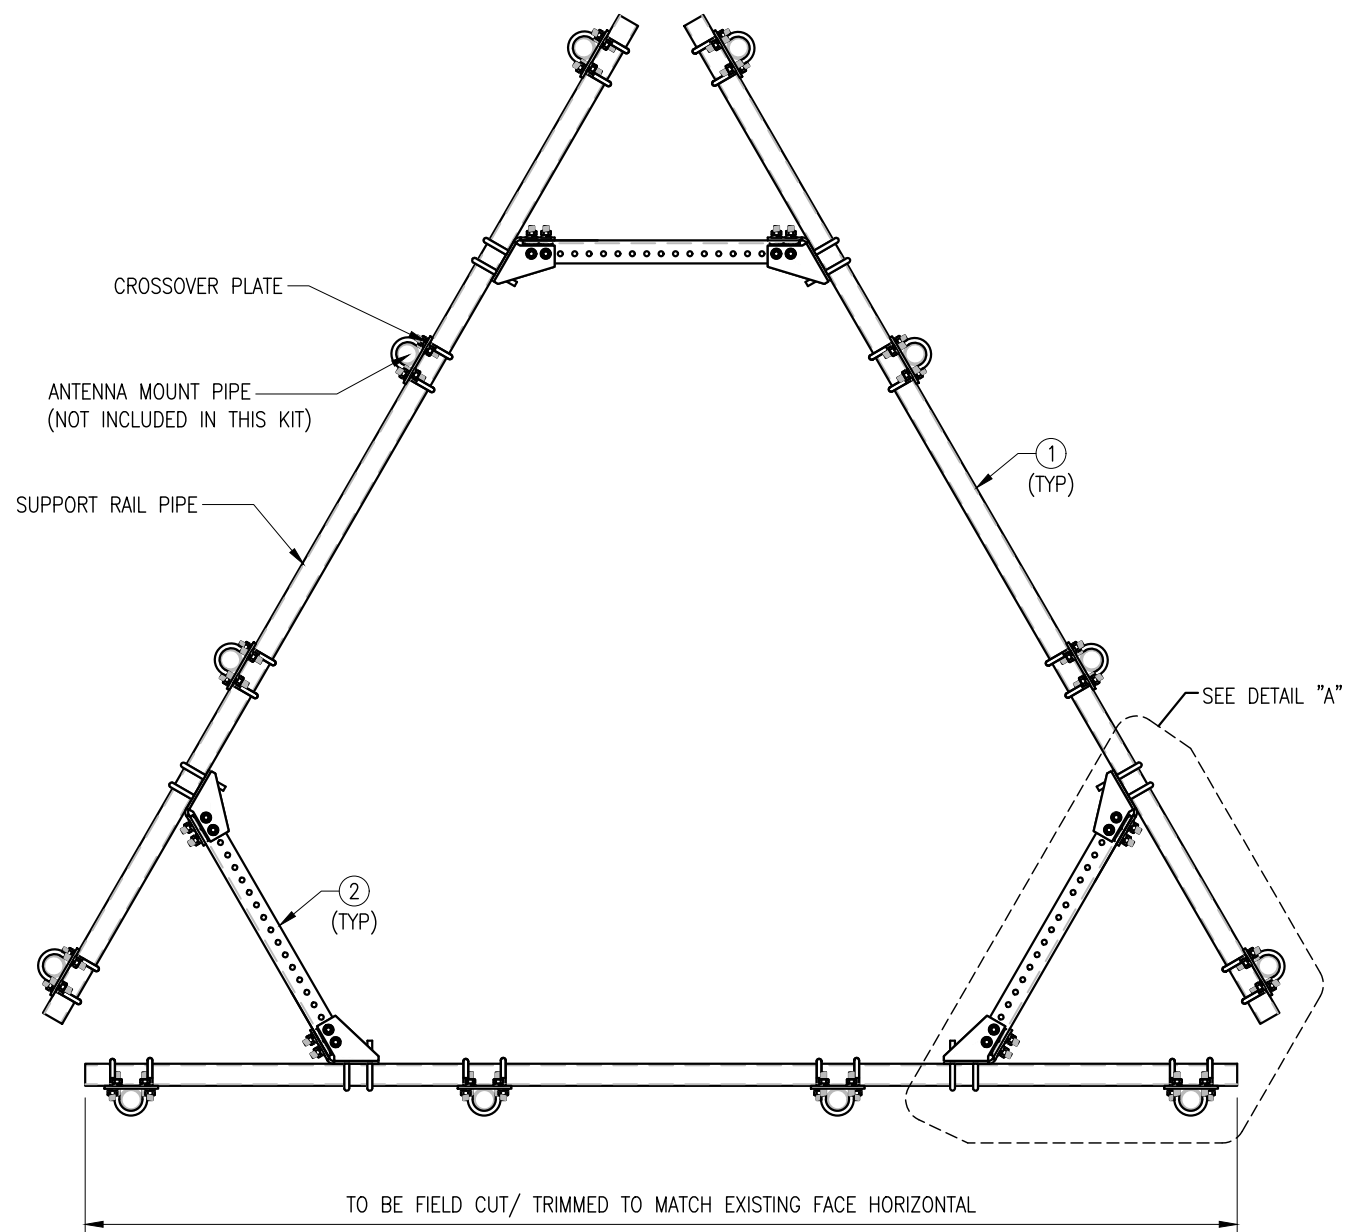


PLAN VIEW

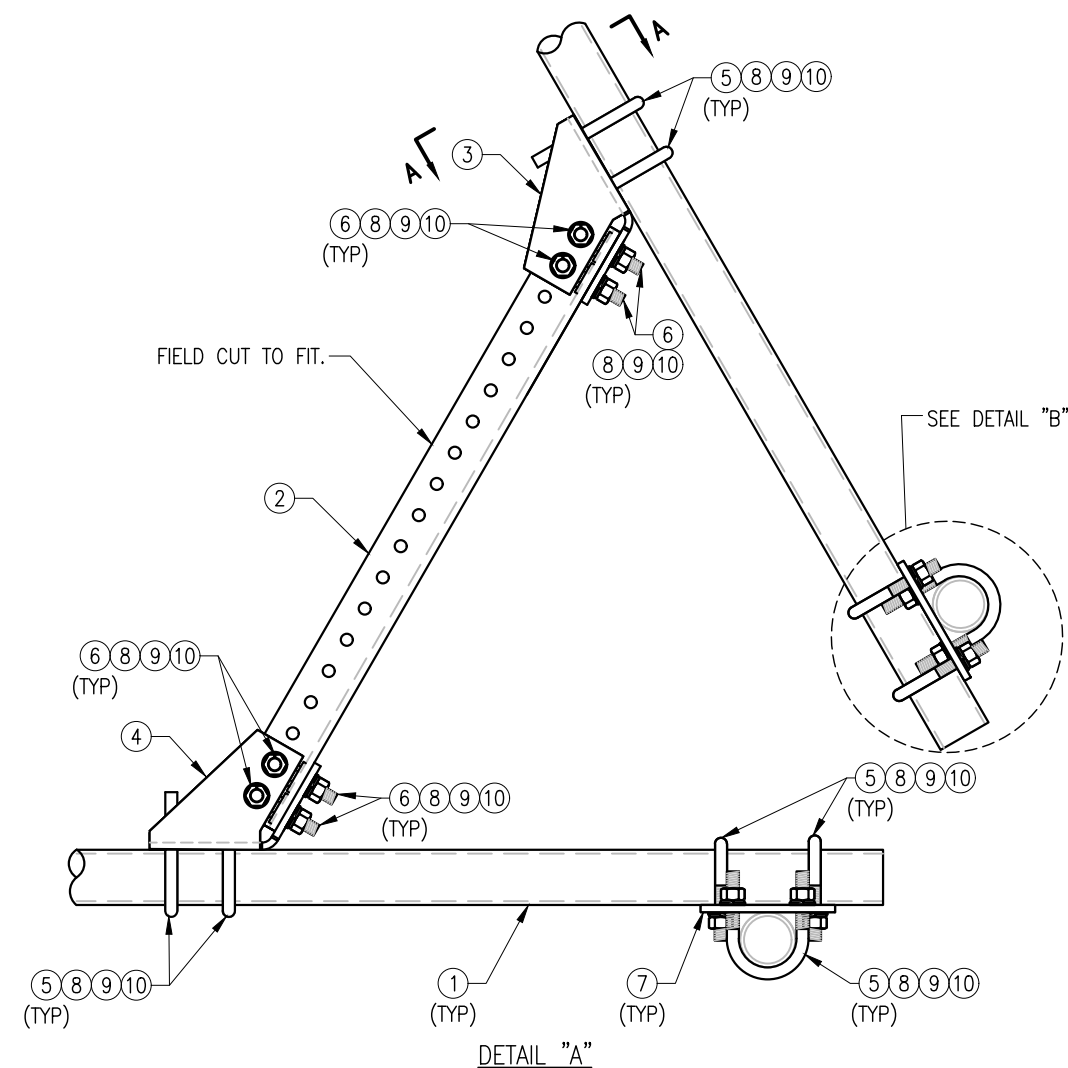

DETAIL "A"

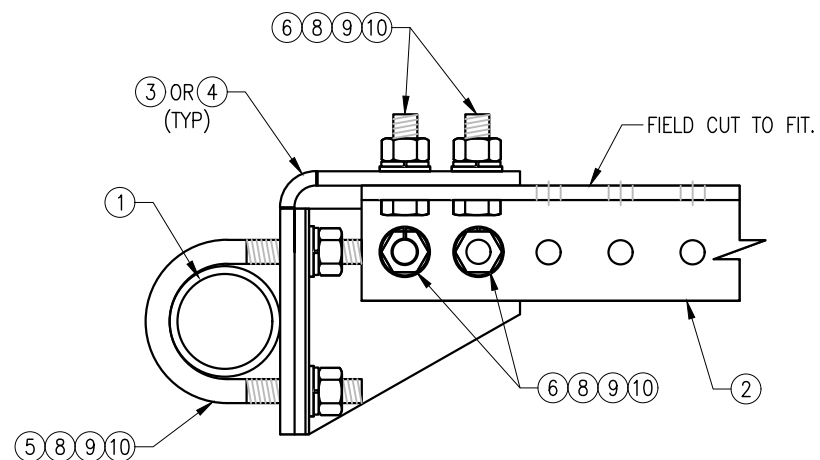

SECTION "A-A"

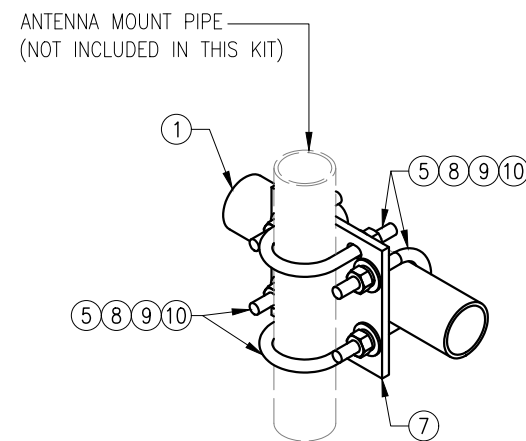

DETAIL "B"

NOTES:

1. HOT-DIPPED GALVANIZED PER ASTM A123.

VZW SMART-PLK1 (SUPPORT RAIL KIT)					
ITEM NO.	QTY.	PART NO.	DESCRIPTION	SHEET #	WT
1	3	PST2875-12.5	2.5" PST (2.875" O.D. X 0.203" THK.) X 12'-6" A53 GR-B	PLK1-F1	292
2	3	L33375-3	L 3" X 3" X 3/8" X 3'-0" A36	PLK1-F1	66
3	3	CBP-L	CORNER BENT PLATE BRACKET	PLK1-F2	28
4	3	CBP-R	CORNER BENT PLATE BRACKET	PLK1-F2	28
5	60	MS02-625-300-500	RU-BOLT 5/8" X 3" I.W. X 5" I.L. A36 (OR EQUIV.)	RBC-1	82
6	24	---	BOLT 5/8" X 2" A325	---	9
7	12	PL375-857	PL 3/8" X 8 1/2" X 7'-0" A36	PLK1-F3	77
8	144	FW-625	5/8" HDG USS FLAT WASHER	---	12
9	144	LW-625	5/8" HDG LOCK WASHER	---	3
10	144	NUT-625	5/8" HDG HEX NUT	---	17
GALVANIZED WT					504

DRAWN BY: H.R. CHECKED BY: HMA





REV.	DESCRIPTION	BY	DATE
△	FIRST ISSUE	H.R.	05/08/20
△			
△			
△			

SHEET TITLE:

VZWSMART-PLK1  
 SUPPORT RAIL KIT

SHEET NUMBER: VZWSMART-PLK1 REV #: 0



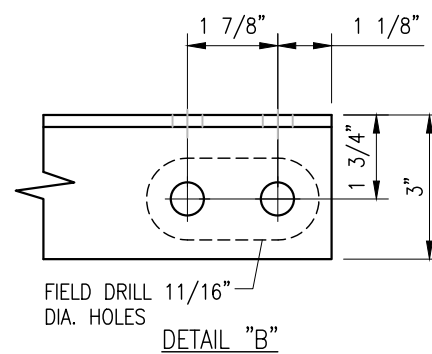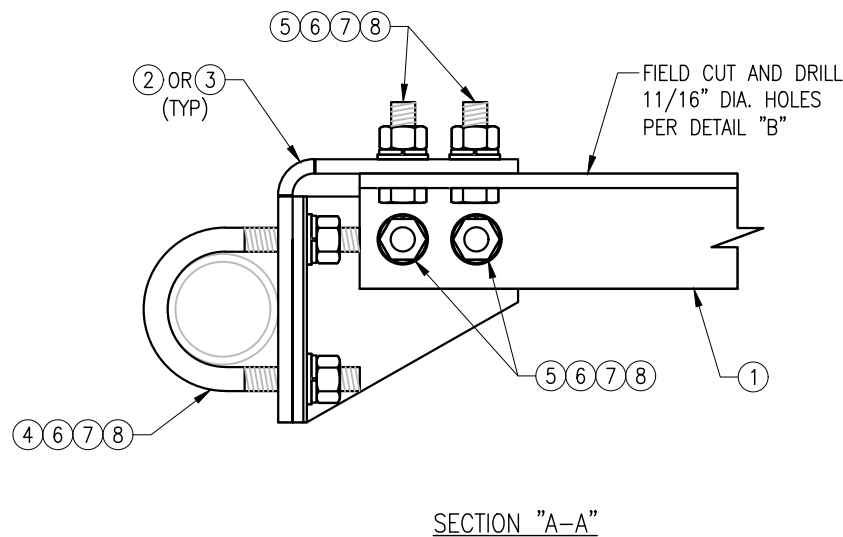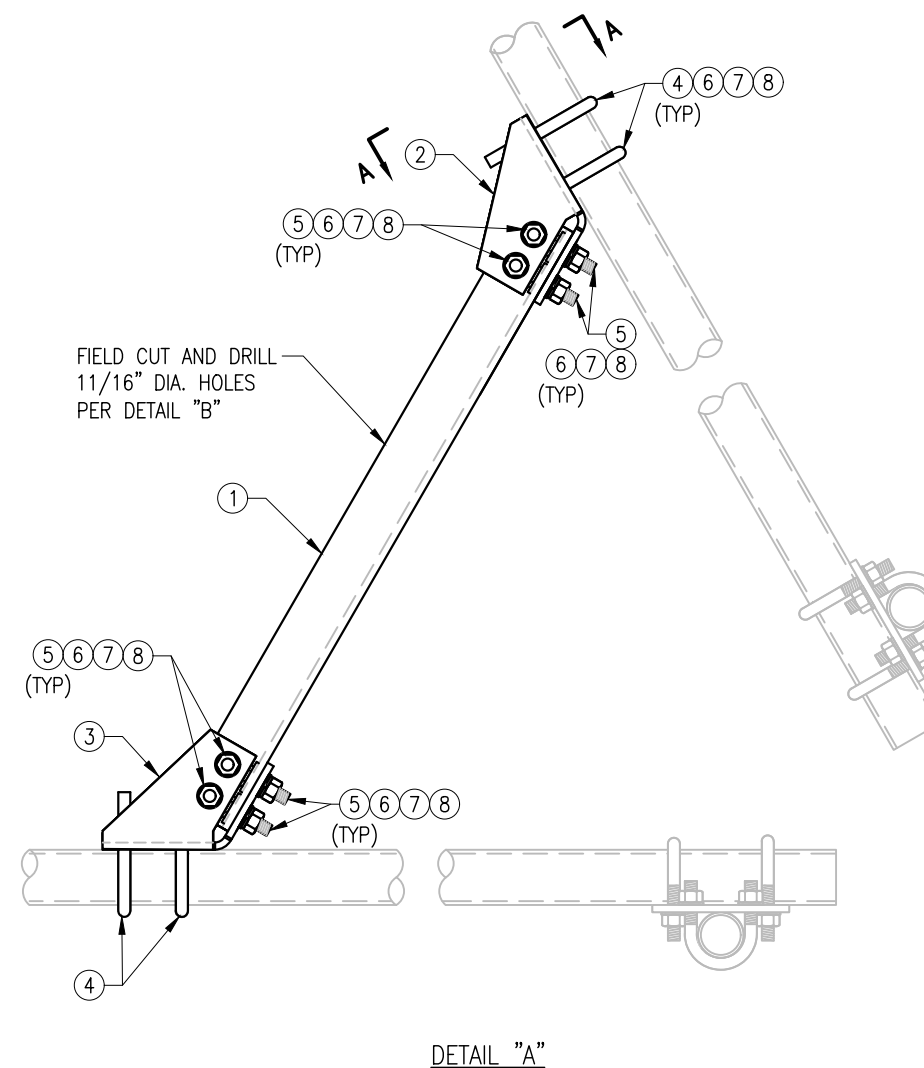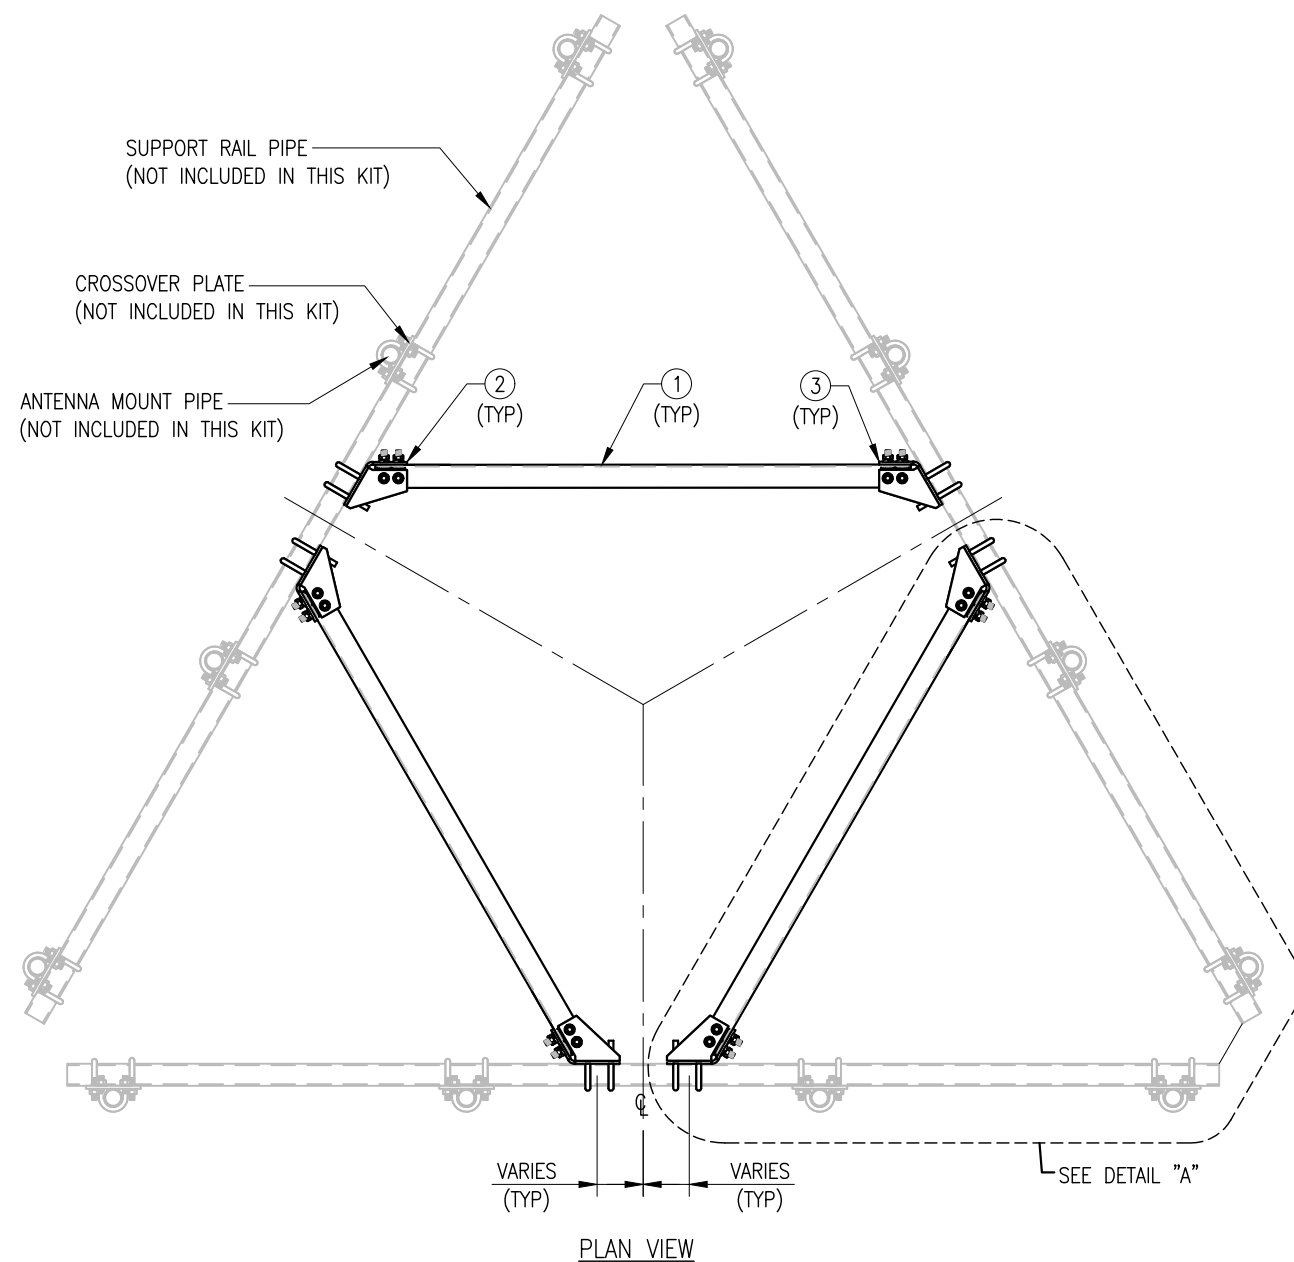

**NOTES:**

1. HOT-DIPPED GALVANIZED PER ASTM A123.

VZWSMART-PLK2 (PLATFORM SUPPORT RAIL BRACING)					
ITEM NO.	QTY.	PART NO.	DESCRIPTION	SHEET #	WT
1	3	L3325-8	L 3" X 3" X 1/4" X 8'-0" A36	PLK2-F1	120
2	3	CBP-L	CORNER BENT PLATE BRACKET	PLK2-F2	28
3	3	CBP-R	CORNER BENT PLATE BRACKET	PLK2-F2	28
4	12	MS02-625-300-500	RU-BOLT 5/8" X 3" I.W. X 5" I.L. A36 (OR EQUIV.)	RBC-1	16
5	24	---	BOLT 5/8" X 2" A325 W/HHN & LKW EA.	---	9
6	48	FW-625	5/8" HDG USS FLAT WASHER	---	4
7	48	LW-625	5/8" HDG LOCK WASHER	---	1
8	48	NUT-625	5/8" HDG HEX NUT	---	6
GALVANIZED WT					211

DRAWN BY: CH/HR CHECKED BY: HMA/KW






REV.	DESCRIPTION	BY	DATE
1	FIRST ISSUE	CH/HR	05/08/20

SHEET TITLE:  
**VZWSMART-PLK2  
 PLATFORM SUPPORT  
 RAIL KIT**

SHEET NUMBER: **VZWSMART-PLK2** REV #: **0**



NOTE:  
THE LOCATION OF KICKER AND EXISTING ANTENNA MOUNT SHOWN ON THE DRAWING IS FOR REPRESENTATION PURPOSE ONLY. SEE INSTALLATION DRAWINGS FOR ACTUAL INSTALLATION OF DETAILS.

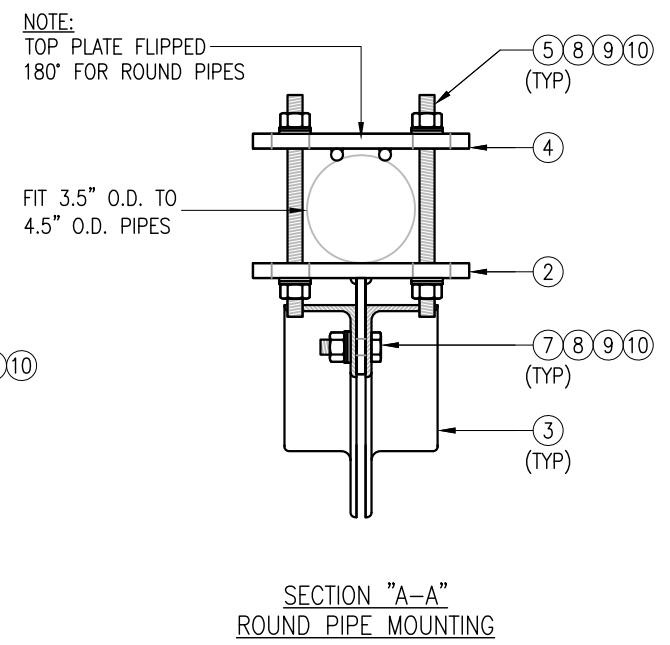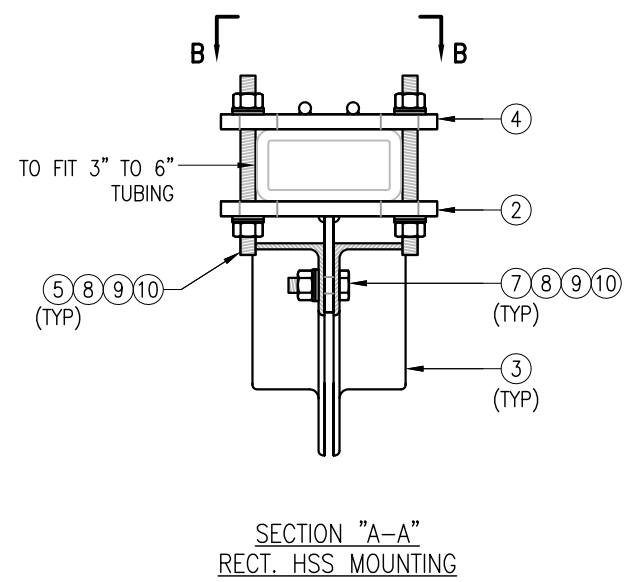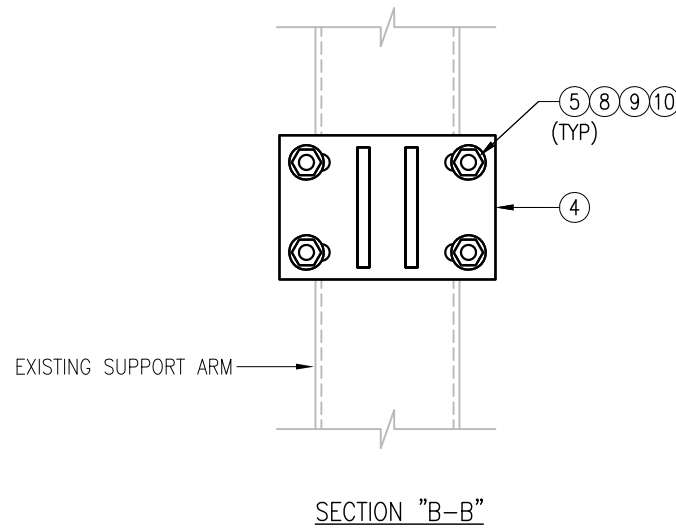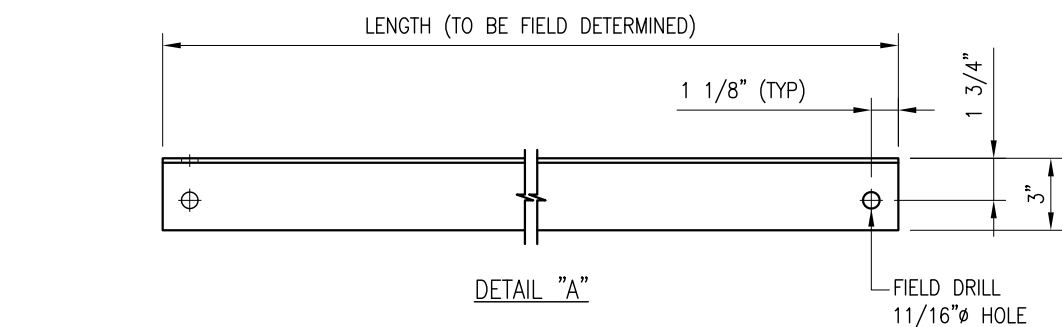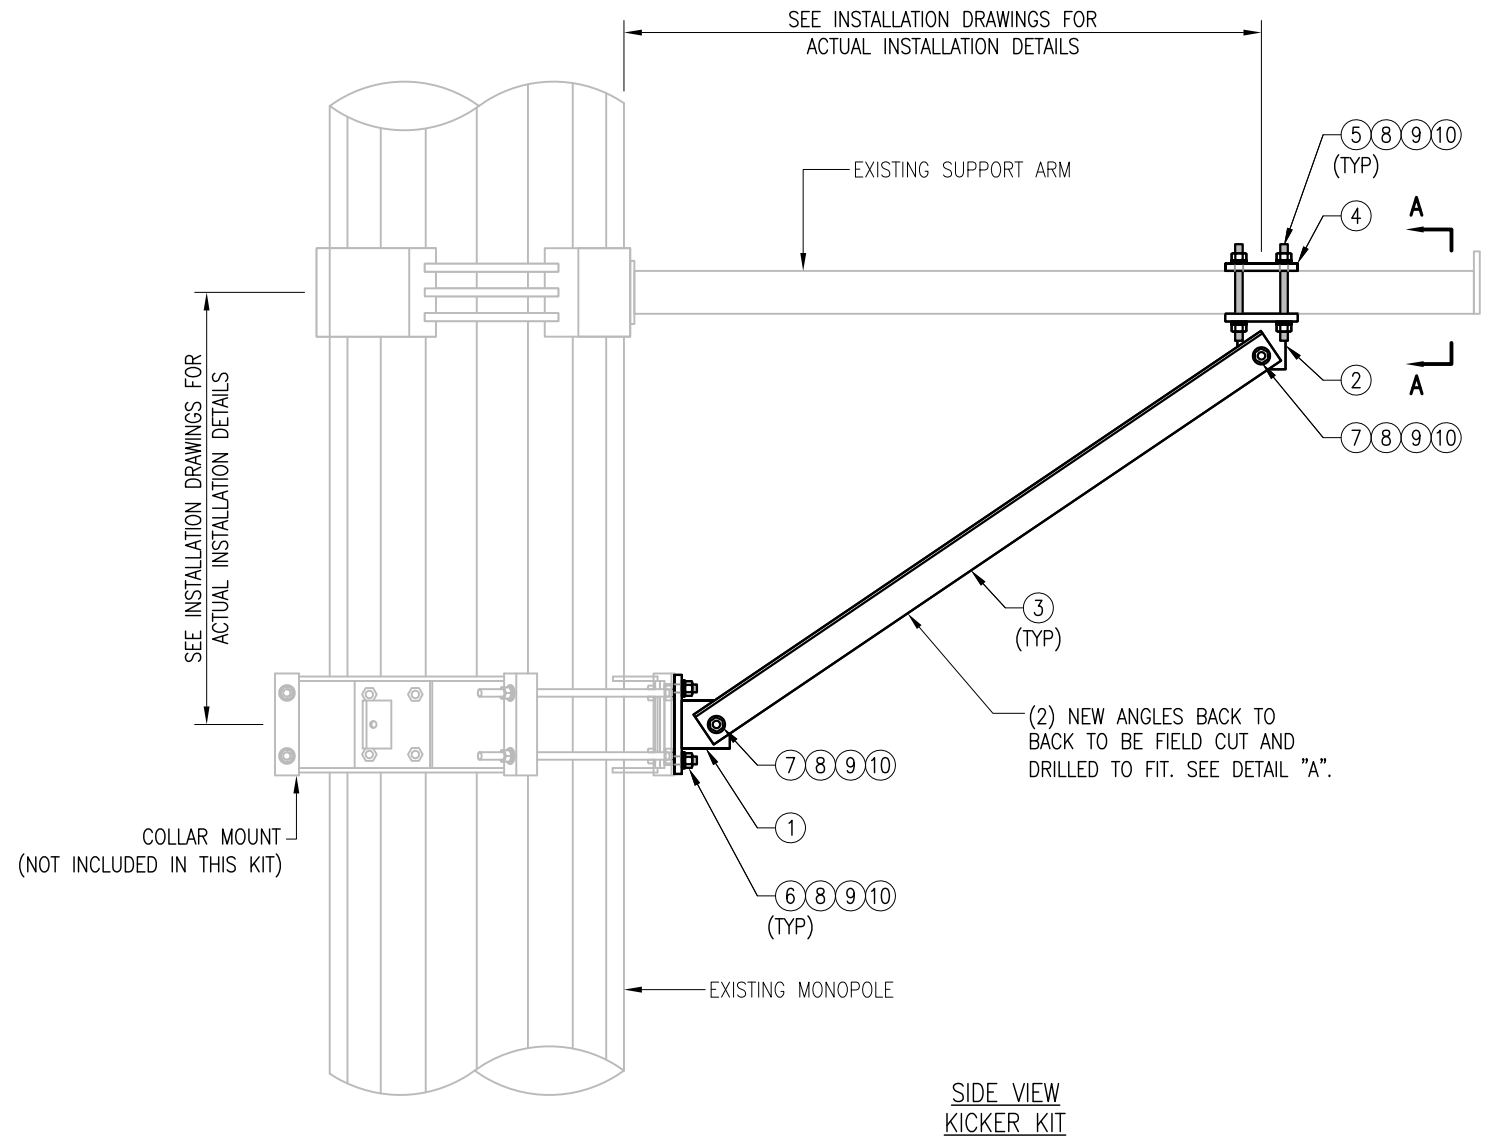

VZSMART-PLK5 (KICKER KIT)					
ITEM NO.	QTY.	PART NO.	DESCRIPTION	SHEET #	WT
1	3	BRKW-XXX	BRACKET WELDMENT A36	PLK5-F3	43.8
2	3	BRKW-XXXX	BRACKET WELDMENT A36	PLK5-F2	35.7
3	6	L331875-8	L 3" X 3" X 3/16" X 8'-0" A36	PLK5-F4	182.9
4	3	PL-KI	PL 5/8" X 6" X 9" A36	PLK5-F1	29.0
5	12	---	THREADED ROD 5/8" DIA. X 1'-0" F1554-36 HDG	---	---
6	6	---	BOLT 5/8" X 2" A325	---	---
7	12	---	BOLT 5/8" X 2 1/2" A325	---	---
8	42	FW-625	5/8" HDG USS FLAT WASHER	---	3
9	42	LW-625	5/8" HDG LOCK WASHER	---	1
10	42	NUT-625	5/8" HDG HEX NUT	---	5
GALVANIZED WT					291

NOTES:  
1. ALL HOLES ARE 11/16" DIA. U.N.O  
2. HOT-DIPPED GALVANIZED PER ASTM A123.  
3. FIT UP TO 6" SQ. TUBING OR 4 1/2" O.D. PIPE

VzW  
**SMART Tool**<sup>®</sup>  
Vendor





DRAWN BY: MN CHECKED BY: HMA/KW

REV.	DESCRIPTION	BY	DATE
1	FIRST ISSUE	MN	05/08/20

SHEET TITLE:  
**VZSMART-PLK5  
KICKER KIT**

SHEET NUMBER: VZSMART-PLK5  
REV #: 0

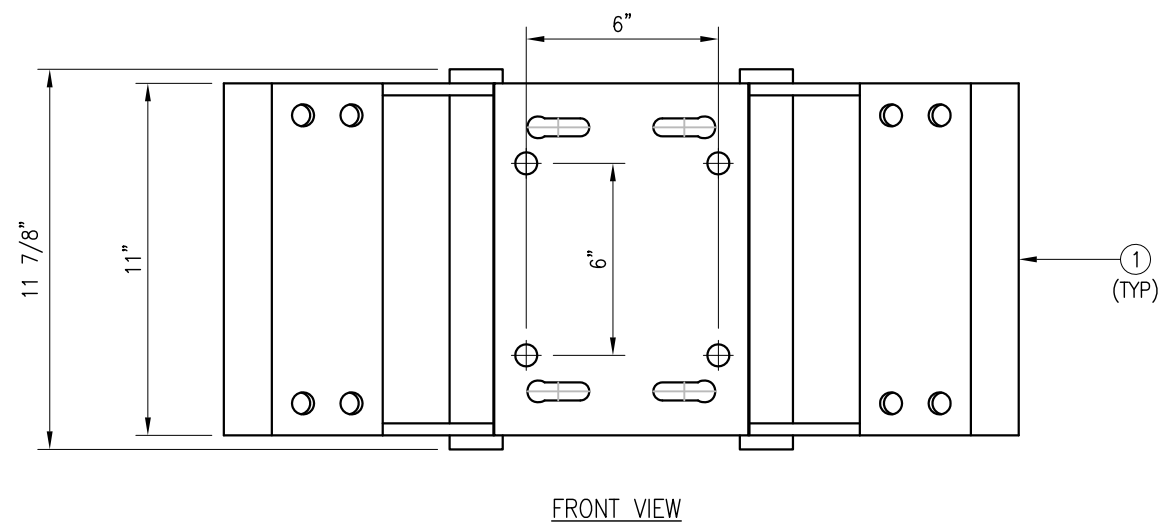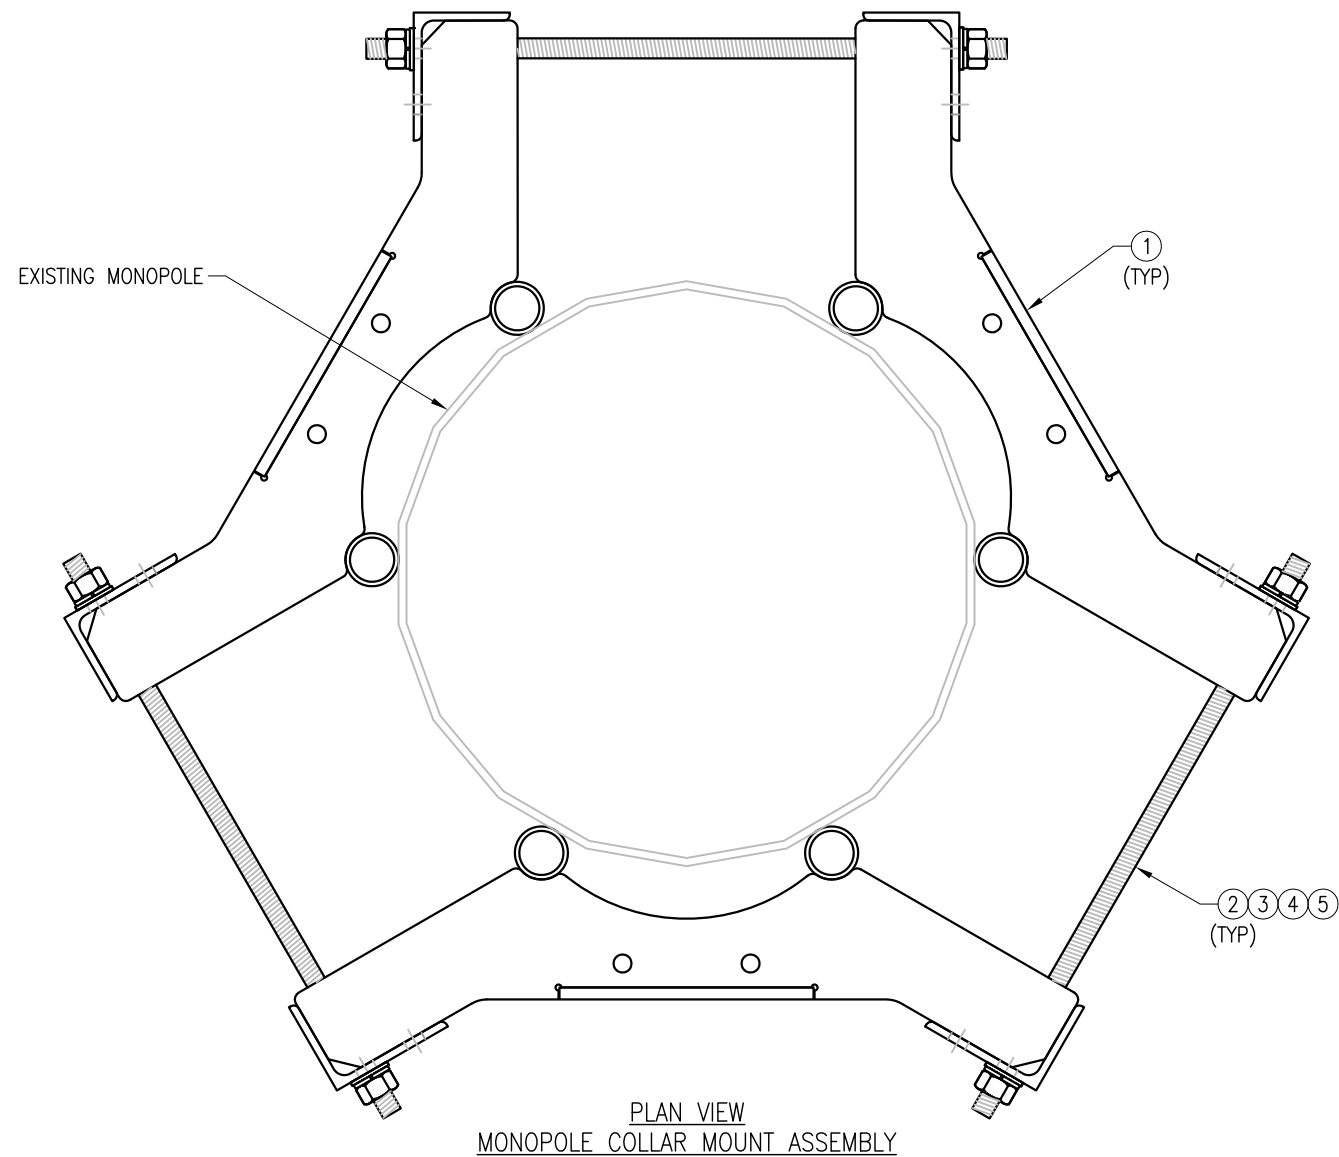

NOTES:  
 1. FIT 12" TO 45" DIA MONOPOLE.  
 2. HOT-DIPPED GALVANIZED PER ASTM A123.

VZSMART-PLK7 (MONOPOLE COLLAR MOUNT ASSEMBLY)					
ITEM NO.	QTY.	PART NO.	DESCRIPTION	SHEET #	WT
1	3	CM-1245	COLLAR MOUNT ASSEMBLY	PLK7-F1	147
2	6	---	THREADED ROD 5/8" X 4'-0" A193-B7	---	
3	12	FW-625	5/8" HDG USS FLAT WASHER	---	1
4	12	LW-625	5/8" HDG LOCK WASHER	---	0
5	12	NUT-625	5/8" HDG HEX NUT	---	1
GALVANIZED WT					150

DRAWN BY: BT      CHECKED BY: HMA/KW


REV.	DESCRIPTION	BY	DATE
1	FIRST ISSUE	BT	05/11/20

SHEET TITLE:  
 VZSMART-PLK7  
 MONOPOLE COLLAR  
 MOUNT ASSEMBLY


SHEET NUMBER: VZSMART-PLK7      REV #: 0



FITS 2.375" O.D. AND 2.875" O.D.  
 VERTICAL PIPE.  
 (NOT INCLUDED IN THIS KIT)

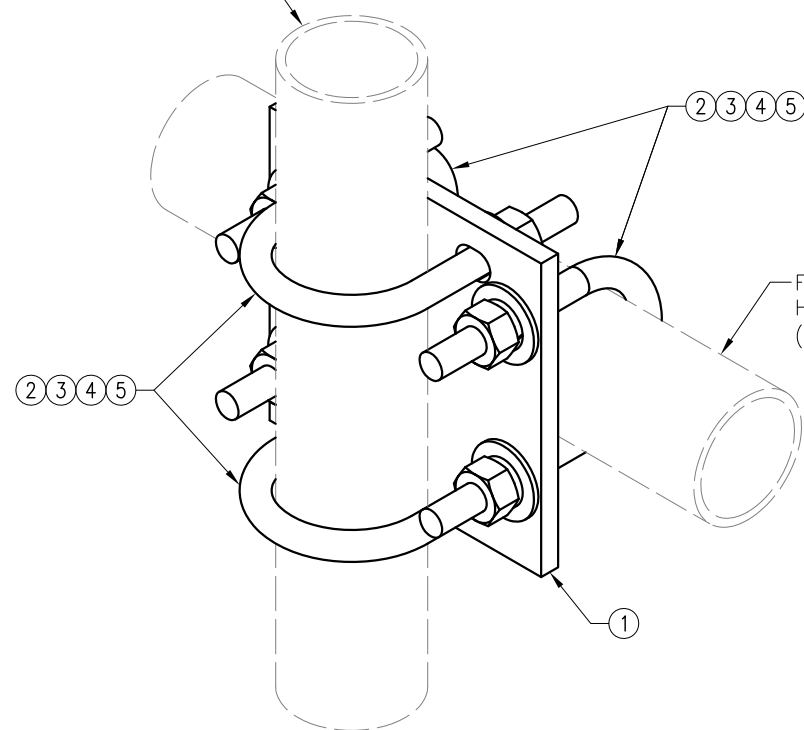

FITS 2.375" O.D. AND 2.875" O.D.  
 HORIZONTAL PIPE.  
 (NOT INCLUDED IN THIS KIT)

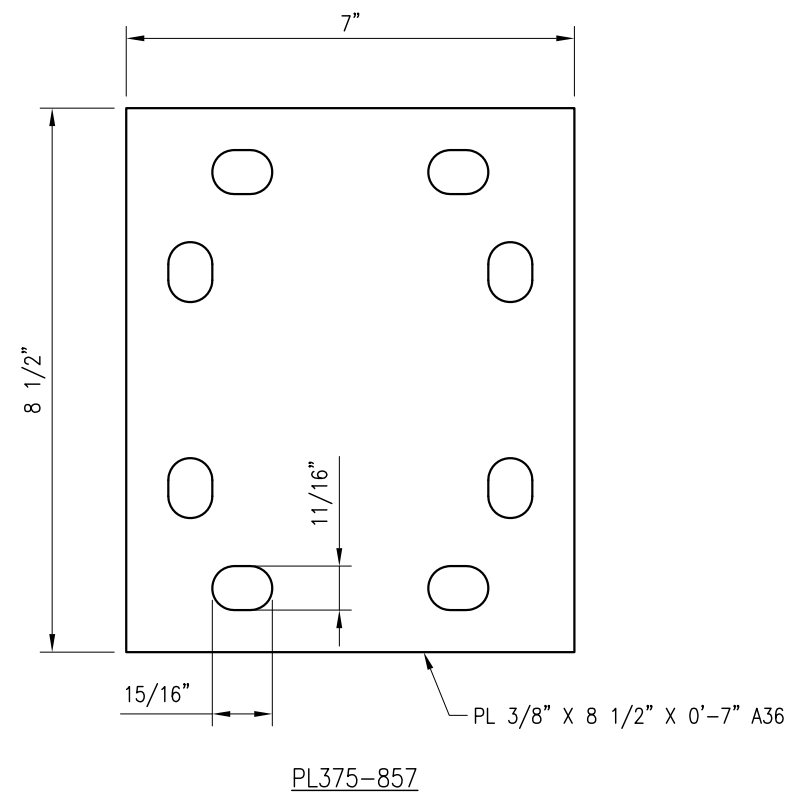

NOTES:  
 1. HOT-DIPPED GALVANIZED PER ASTM A123.

VZSMART-MSK1 (CROSSOVER PLATE)					
ITEM NO.	QTY.	PART NO.	DESCRIPTION	SHEET #	WT
1	1	PL375-857	PL 3/8" X 8 1/2" X 0'-7" A36	MSK1-F1	6
2	4	MS02-625-300-500	RU-BOLT 5/8" X 3" I.W. X 5" I.L. A36 (OR EQUIV.)	RBC-1	5
3	8	FW-625	5/8" HDG USS FLAT WASHER	---	1
4	8	LW-625	5/8" HDG LOCK WASHER	---	0
5	8	NUT-625	5/8" HDG HEX NUT	---	1
GALVANIZED WT					14

DRAWN BY: H.R. CHECKED BY: HMA


REV.	DESCRIPTION	BY	DATE
1	FIRST ISSUE	H.R.	05/08/20

SHEET TITLE:

VZSMART-MSK1  
 CROSSOVER PLATE

SHEET NUMBER: REV #:

VZSMART-MSK1 0

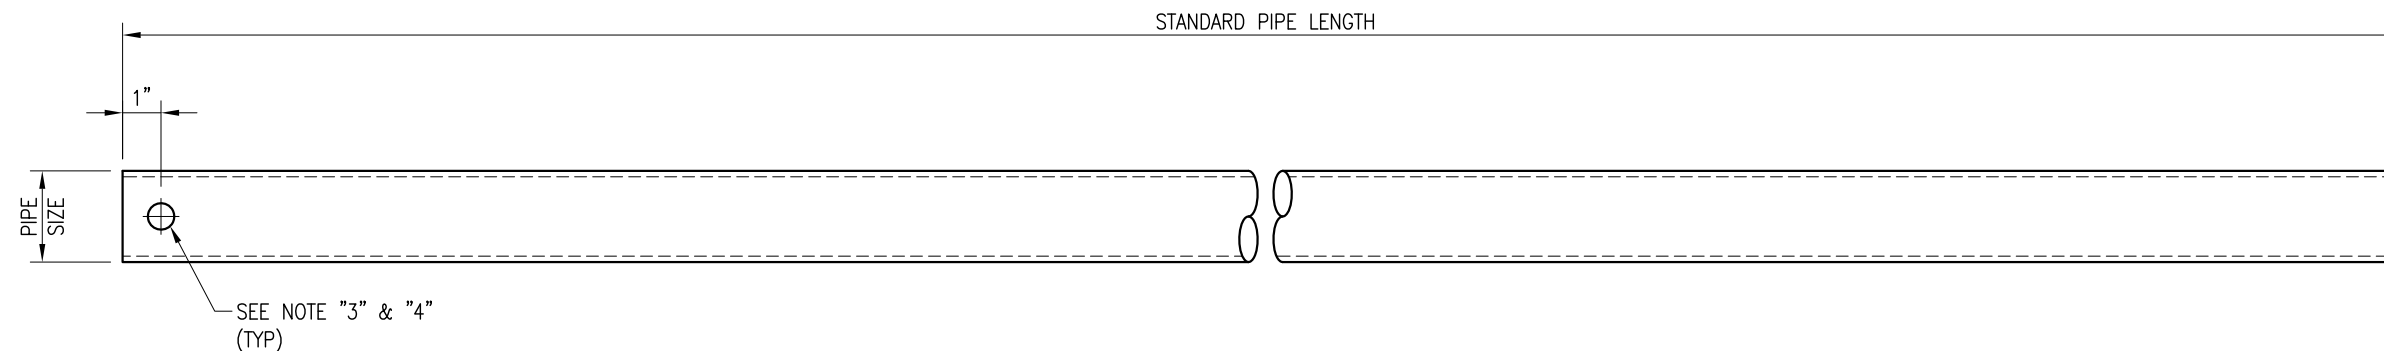

VZWSMART Standard Pipe		
VZWSMART Number	Size	Length
P40-238X048	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	48"
P40-238X072	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	72"
P40-238X096	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	96"
P40-238X120	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	120"
P40-238X126	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	126"
P40-238X150	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	150"
P40-238X174	PIPE 2 SCH40 (2.375" OD x 0.154" THK)	174"
P40-278X048	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	48"
P40-278X072	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	72"
P40-278X096	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	96"
P40-278X120	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	120"
P40-278X126	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	126"
P40-278X150	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	150"
P40-278X174	PIPE 2.5 SCH40 (2.875" OD x 0.203" THK)	174"
P40-312X048	PIPE 3 SCH40 (3.5" OD x 0.216" THK)	48"
P40-312X072	PIPE 3 SCH40 (3.5" OD x 0.216" THK)	72"
P40-312X126	PIPE 3 SCH40 (3.5" OD x 0.216" THK)	126"
P40-312X150	PIPE 3 SCH40 (3.5" OD x 0.216" THK)	150"
P40-312X174	PIPE 3 SCH40 (3.5" OD x 0.216" THK)	174"

**NOTE:**  
 APPROVED SMART KIT VENDORS ARE ALLOWED TO SUBSTITUTE AT THEIR DISCRETION  
 PIPES LISTED ON THIS PAGE FOR CUSTOM LENGTH COMPONENTS OF MATCHING SIZE.  
 SUBSTITUTIONS SHALL MEET THE ORIGINAL STRUCTURAL INTENT.

- NOTES:**
1. ALL PIPE GRADE A53-B OR BETTER.
  2. HOT-DIPPED GALVANIZED PER ASTM A123.
  3. ALL HOLES ARE 11/16" DIA. U.N.O
  4. HOLES MAY OR MAY NOT BE PRESENT, DEPEND UPON MANUFACTURE DISCRETION.
  5. ALL FIELD CUT AND DRILLED SURFACES SHALL BE REPAIRED WITH A MINIMUM OF TWO COATS OF ZINGA OR ZINC COTE PER ASTM A780 AND MANUFACTURER'S RECOMMENDATIONS.

DRAWN BY: BT      CHECKED BY: HMA/KW

REV.	DESCRIPTION	BY	DATE
1	FIRST ISSUE	BT	08/04/21

SHEET TITLE:

VZWSMART  
 STANDARD PIPE

SHEET NUMBER:      REV #:

VZWSMART-PIPE

0










### Antenna Mount Mapping Form (PATENT PENDING)


FCC #

Tower Owner:	CROWN CASTLE	Mapping Date:	2/16/2021
Site Name:	MILFORD CT	Tower Type:	Monopole
Site Number or ID:	806359	Tower Height (Ft.):	108
Mapping Contractor:	LEVEL-UP TOWERS	Mount Elevation (Ft.):	105


This antenna mapping form is the property of TES and under **PATENT PENDING**. The formation contained herein is considered confidential in nature and is to be used only for the specific customer it was intended for. Reproduction, transmission, publication, modification or disclosure by any method is prohibited except by express written permission of TES. All means and methods are the responsibility of the contractor and the work shall be compliant with ANSI/ASSE A 10.48, OSHA, FCC, FAA and other safety requirements that may apply. TES is not warranting the usability of the safety climb as it must be assessed prior to each use in compliance with OSHA requirements.

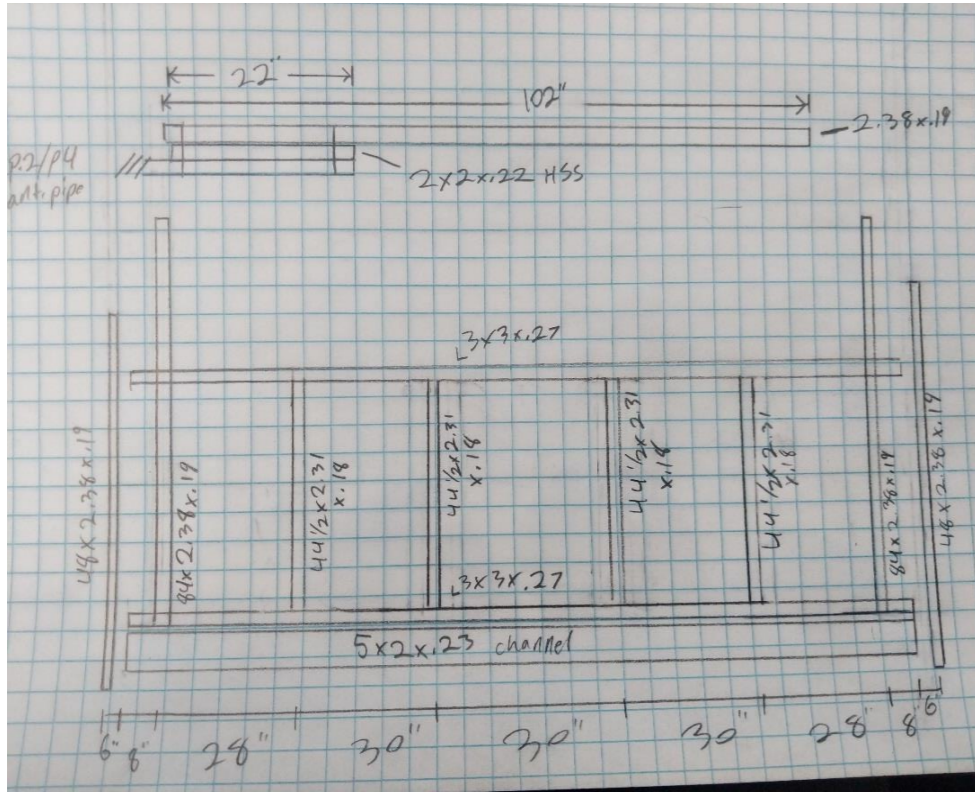

Mount Pipe Configuration and Geometries [Unit = Inches]							
Sector / Position	Mount Pipe Size & Length	Vertical Offset Dimension "u"	Horizontal Offset "C1, C2, C3, etc."	Sector / Position	Mount Pipe Size & Length	Vertical Offset Dimension "u"	Horizontal Offset "C1, C2, C3, etc."
A1	84x2.38x.19	84.00	8.00	C1	84x2.38x.19	84.00	8.00
A2	102x2.31x.18	124.00	32.00	C2	102x2.31x.18	124.00	32.00
A3	44x2.31x.18	44.00	72.00	C3	44x2.31x.18	44.00	72.00
A4	102x2.31x.18	124.00	102.00	C4	102x2.31x.18	124.00	102.00
A5	44x2.31x.18	44.00	132.00	C5	44x2.31x.18	44.00	132.00
A6	84x2.38x.19	84.00	146.00	C6	84x2.38x.19	84.00	146.00
B1	84x2.38x.19	84.00	8.00	D1			
B2	102x2.31x.18	124.00	32.00	D2			
B3	44x2.31x.18	44.00	72.00	D3			
B4	102x2.31x.18	124.00	102.00	D4			
B5	44x2.31x.18	44.00	132.00	D5			
B6	84x2.38x.19	84.00	146.00	D6			
Distance between bottom rail and mount CL elevation (dim d). Unit is inches. See 'Mount Elev Ref' tab for details. :							0.00
Distance from top of bottom support rail to lowest tip of ant./eqpt. of Carrier above. (N/A if > 10 ft.) :							
Distance from top of bottom support rail to highest tip of ant./eqpt. of Carrier below. (N/A if > 10 ft.) :							82
Please enter additional information or comments below.							
Tower Face Width at Mount Elev. (ft.):		Tower Leg Size or Pole Shaft Diameter at Mount Elev. (in.):				24.2	

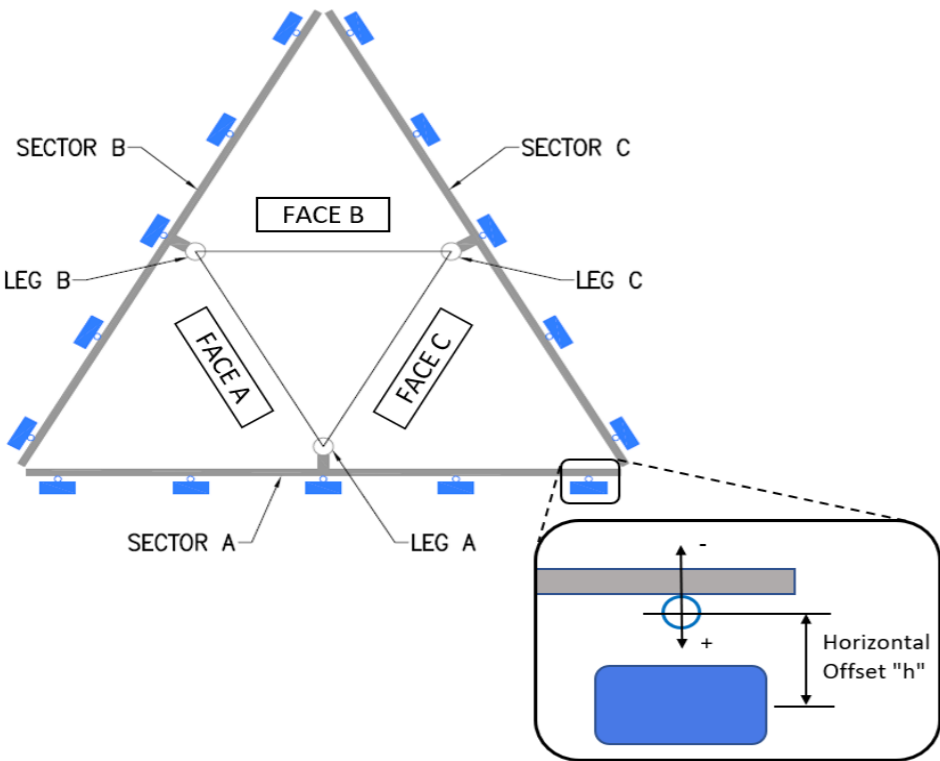

Ants. Items	Enter antenna model. If not labeled, enter "Unknown".						Mounting Locations [Units are inches and degrees]			Photos of antennas
	Antenna Models if Known	Width (in.)	Depth (in.)	Height (in.)	Coax Size and Qty	Antenna Center-line (Ft.)	Vertical Distances "b <sub>1a</sub> , b <sub>2a</sub> , b <sub>3a</sub> , b <sub>1b</sub> ..." (Inches)	Horiz. Offset "h" (Use "-" if Ant. is behind)	Antenna Azimuth (Degrees)	
<b>Sector A</b>										
Ant <sub>1a</sub>	RRH2X40-AWS	12.00	8.00	25.00	FIBER	107.5	54.00	-6.00	95.00	73
Ant <sub>1b</sub>	BXA-171063-8BF-EDIN	6.00	4.00	48.00	(2) 1/2	107.583	53.00	8.00	95.00	73
Ant <sub>1c</sub>										
Ant <sub>2a</sub>	DB846F65ZAXY	10.00	8.00	72.00	(1) 7/8	112.167	38.00	15.00	50.00	75
Ant <sub>2b</sub>										
Ant <sub>2c</sub>										
Ant <sub>3a</sub>	SWCP2X5514	14.00	11.00	51.00	(2) 7/8	106.583	25.00	12.00	95.00	78
Ant <sub>3b</sub>										
Ant <sub>3c</sub>										
Ant <sub>4a</sub>	DB846F65ZAXY	10.00	8.00	72.00	(1) 7/8	112.167	38.00	15.00	140.00	82
Ant <sub>4b</sub>										
Ant <sub>4c</sub>										
Ant <sub>5a</sub>	BXA-171063-8BF-EDIN	6.00	4.00	48.00		106.833	22.00	8.75	95.00	83
Ant <sub>5b</sub>										
Ant <sub>5c</sub>										
Ant on Standoff										
Ant on Standoff										
Ant on Tower										
Ant on Tower										

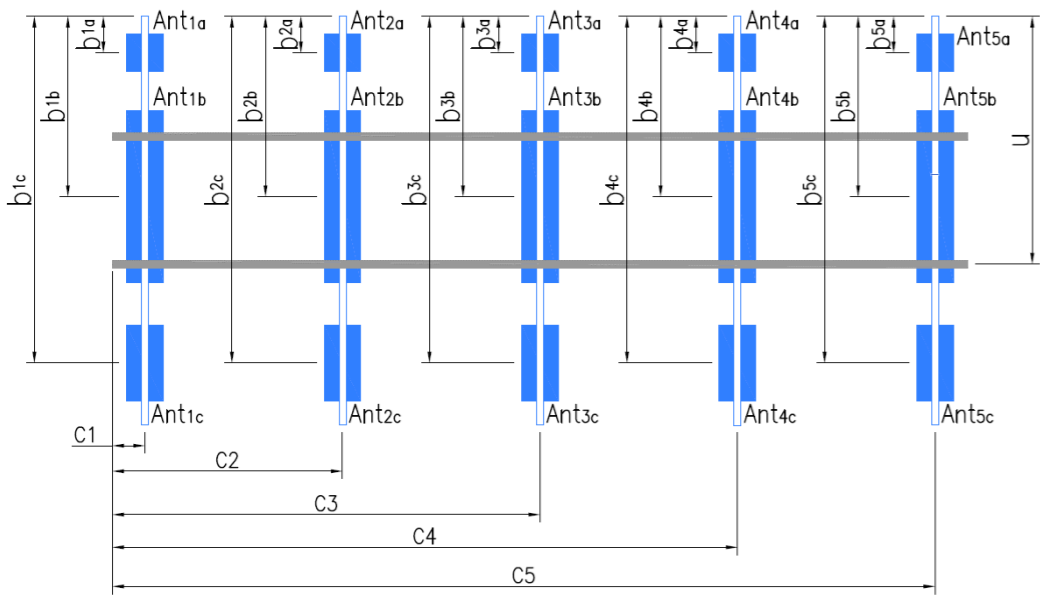

**Antenna Layout (Looking Out From Tower)**

Mount Azimuth (Degree) for Each Sector				Tower Leg Azimuth (Degree) for Each Sector				Sector B										
Sector A:	95.00	Deg	Leg A:		Deg	Ant <sub>1a</sub>	RRH2X40-AWS	12.00	8.00	25.00	FIBER	107.5	54.00	-6.00		85		
Sector B:	215.00	Deg	Leg B:		Deg	Ant <sub>1b</sub>	BXA-171063-8BF-EDIN	6.00	4.00	48.00	(2) 1/2	107.583	53.00	8.00	215.00	85		
Sector C:	335.00	Deg	Leg C:		Deg	Ant <sub>1c</sub>												
Sector D:		Deg	Leg D:		Deg	Ant <sub>2a</sub>	DB846F65ZAXY	10.00	8.00	72.00	(1) 7/8	112.167	38.00	15.00	170.00	90		
<b>Climbing Facility Information</b>																		
Location:	FACE	Deg	Sector B															
Climbing Facility	Corrosion Type:		Good condition.															
	Access:		Climbing path was obstructed.															
	Condition:		Missing safety cable.															
<b>Sector B</b>																		
Ant <sub>2b</sub>						Ant <sub>2c</sub>												
Ant <sub>3a</sub>	SWCP2X5514	14.00	11.00	51.00	(2) 7/8	106.583	25.00	12.00	215.00	92								
Ant <sub>3b</sub>																		
Ant <sub>3c</sub>																		
Ant <sub>4a</sub>	DB846F65ZAXY	10.00	8.00	72.00	(1) 7/8	112.167	38.00	15.00	260.00	95								
Ant <sub>4b</sub>																		
Ant <sub>4c</sub>																		
Ant <sub>5a</sub>	BXA-171063-8BF-EDIN	6.00	4.00	48.00		106.833	22.00	8.75	215.00	96								
Ant <sub>5b</sub>																		
Ant <sub>5c</sub>																		
Ant on Standoff																		
Ant on Standoff																		
Ant on Tower																		
Ant on Tower																		
<b>Sector C</b>																		
Ant <sub>1a</sub>	RRH2X40-AWS	12.00	8.00	25.00	FIBER	107.5	54.00	-6.00		43								
Ant <sub>1b</sub>	BXA-171063-8BF-EDIN	6.00	4.00	48.00	(2) 1/2	107.583	53.00	8.00	335.00	45								
Ant <sub>1c</sub>																		
Ant <sub>2a</sub>	DB846F65ZAXY	10.00	8.00	72.00	(1) 7/8	112.167	38.00	15.00	290.00	43								
Ant <sub>2b</sub>																		
Ant <sub>2c</sub>																		
Ant <sub>3a</sub>	SWCP2X5514	14.00	11.00	51.00	(2) 7/8	106.583	25.00	12.00	335.00	56								
Ant <sub>3b</sub>																		
Ant <sub>3c</sub>																		
Ant <sub>4a</sub>	DB846F65ZAXY	10.00	8.00	72.00	(1) 7/8	112.167	38.00	15.00	10.00	61								
Ant <sub>4b</sub>																		
Ant <sub>4c</sub>																		
Ant <sub>5a</sub>	BXA-171063-8BF-EDIN	6.00	4.00	48.00		106.833	22.00	8.75	335.00	66								
Ant <sub>5b</sub>																		
Ant <sub>5c</sub>																		
Ant on Standoff																		
Ant on Standoff																		
Ant on Tower																		
Ant on Tower																		
<b>Sector D</b>																		
Ant <sub>1a</sub>																		
Ant <sub>1b</sub>																		
Ant <sub>1c</sub>																		
Ant <sub>2a</sub>																		
Ant <sub>2b</sub>																		
Ant <sub>2c</sub>																		
Ant <sub>3a</sub>																		
Ant <sub>3b</sub>																		
Ant <sub>3c</sub>																		
Ant <sub>4a</sub>																		
Ant <sub>4b</sub>																		
Ant <sub>4c</sub>																		
Ant <sub>5a</sub>																		
Ant <sub>5b</sub>																		
Ant <sub>5c</sub>																		
Ant on Standoff																		
Ant on Standoff																		
Ant on Tower																		
Ant on Tower																		

**Observed Safety and Structural Issues During the Mount Mapping**

Issue #	Description of Issue	Photo #
---------	----------------------	---------

1		
2		
3		
4		
5		
6		
7		
8		

**Mapping Notes**

1. Please report any visible structural or safety issues observed on the antenna mounts (Damaged members, loose connections, tilting mounts, safety climb issues, etc.)
2. If the thickness of the existing pipes or tubing can't be obtained from a general tool (such as Caliper), please use an ultrasonic measurement tool (thickness gauge) to measure the thickness.
3. Please create all required detail sketches of the mounts and insert them into the "Sketches" tab.
4. Please measure and enter the bolt sizes and types under the Members Box in the spreadsheet of the mount type.
5. Take and label the photos of the tower, mounts, connections, antennas and all measurements. Minimum 50 photos are required.
6. Please measure and report the size and length of all existing antenna mounting pipes.
7. Please measure and report the antenna information for all sectors.
8. Don't delete or rearrange any sheet or contents of any sheet from this mapping form.

**Standard Conditions**

1. Obvious safety and structural issues/deficiencies noticed at the time of the mount mapping are to be reported in this mapping. However, this mount mapping is not a condition assessment of the mount.






### Antenna Mount Mapping Form (PATENT PENDING)

FCC #


Tower Owner:	CROWN CASTLE	Mapping Date:	2/16/2021
Site Name:	MILFORD CT	Tower Type:	Monopole
Site Number or ID:	806359	Tower Height (Ft.):	108
Mapping Contractor:	LEVEL-UP TOWERS	Mount Elevation (Ft.):	105

This antenna mapping form is the property of TES and under **PATENT PENDING**. The formation contained herein is considered confidential in nature and is to be used only for the specific customer it was intended for. Reproduction, transmission, publication, modification or disclosure by any method is prohibited except by express written permission of TES. All means and methods are the responsibility of the contractor and the work shall be compliant with ANSI/ASSE A 10.48, OSHA, FCC, FAA and other safety requirements that may apply. TES is not warranting the usability of the safety climb as it must be assessed prior to each use in compliance with OSHA requirements.



Please Insert Sketches of the Antenna Mount

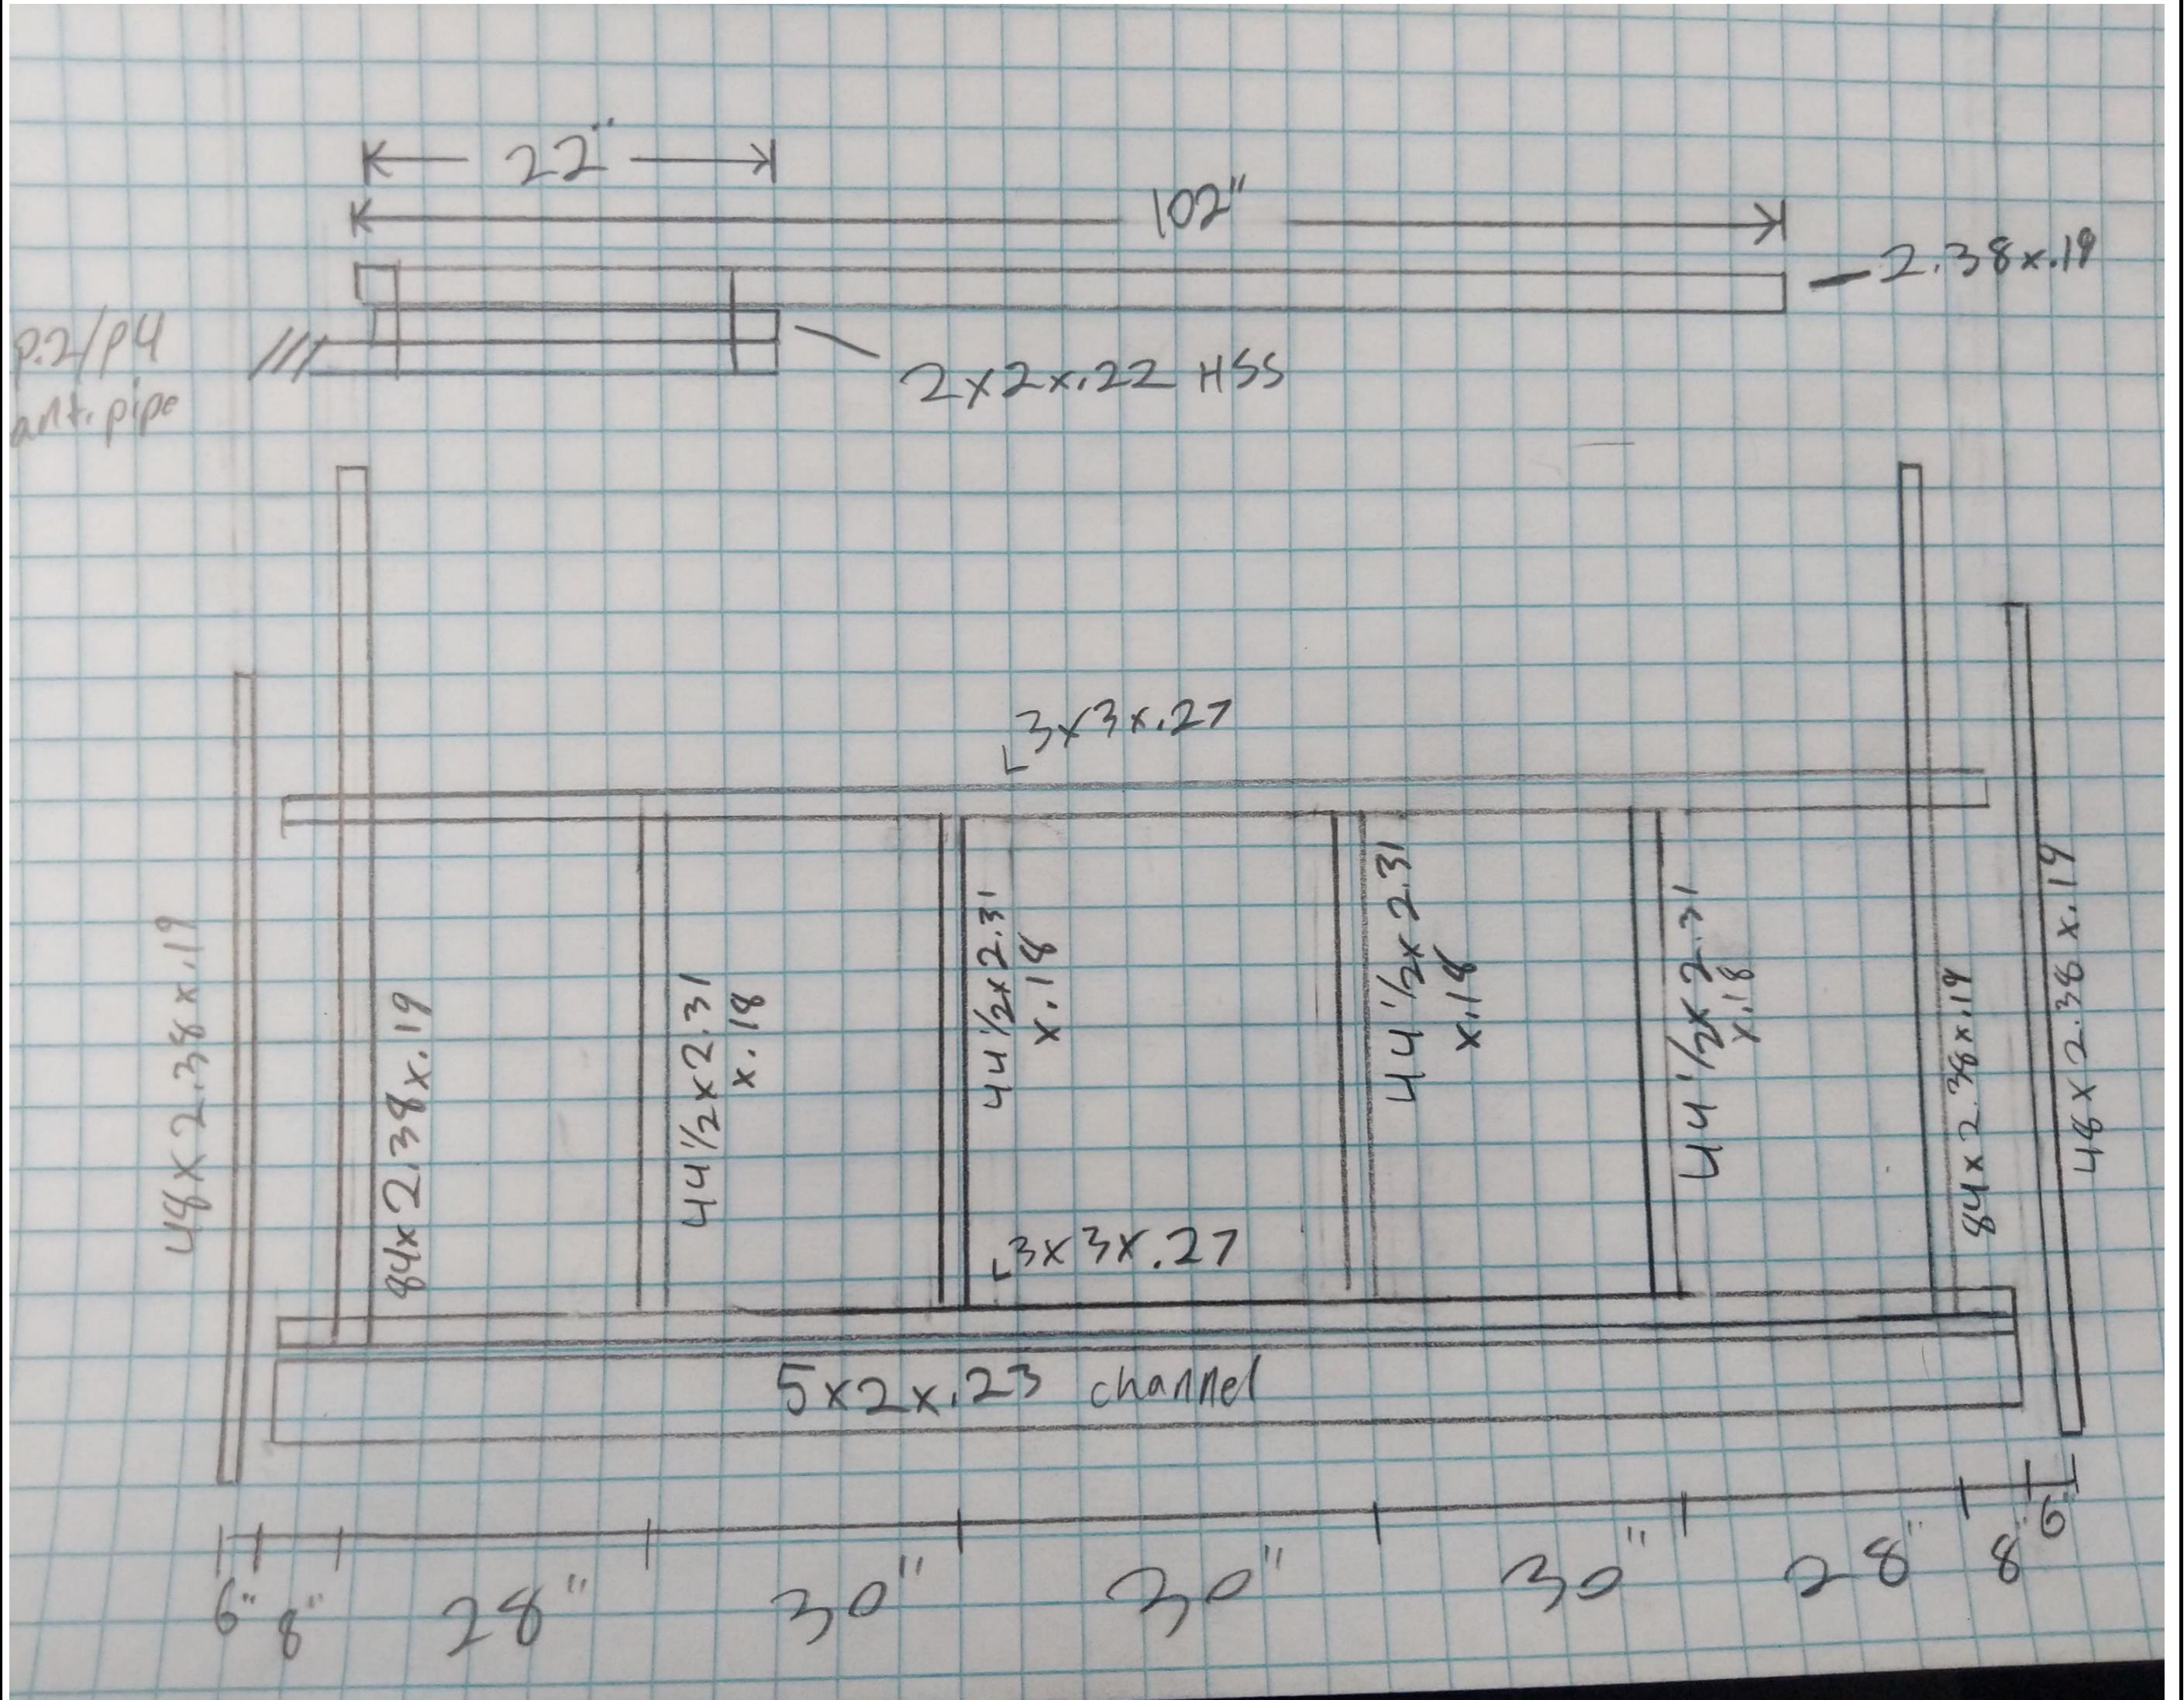



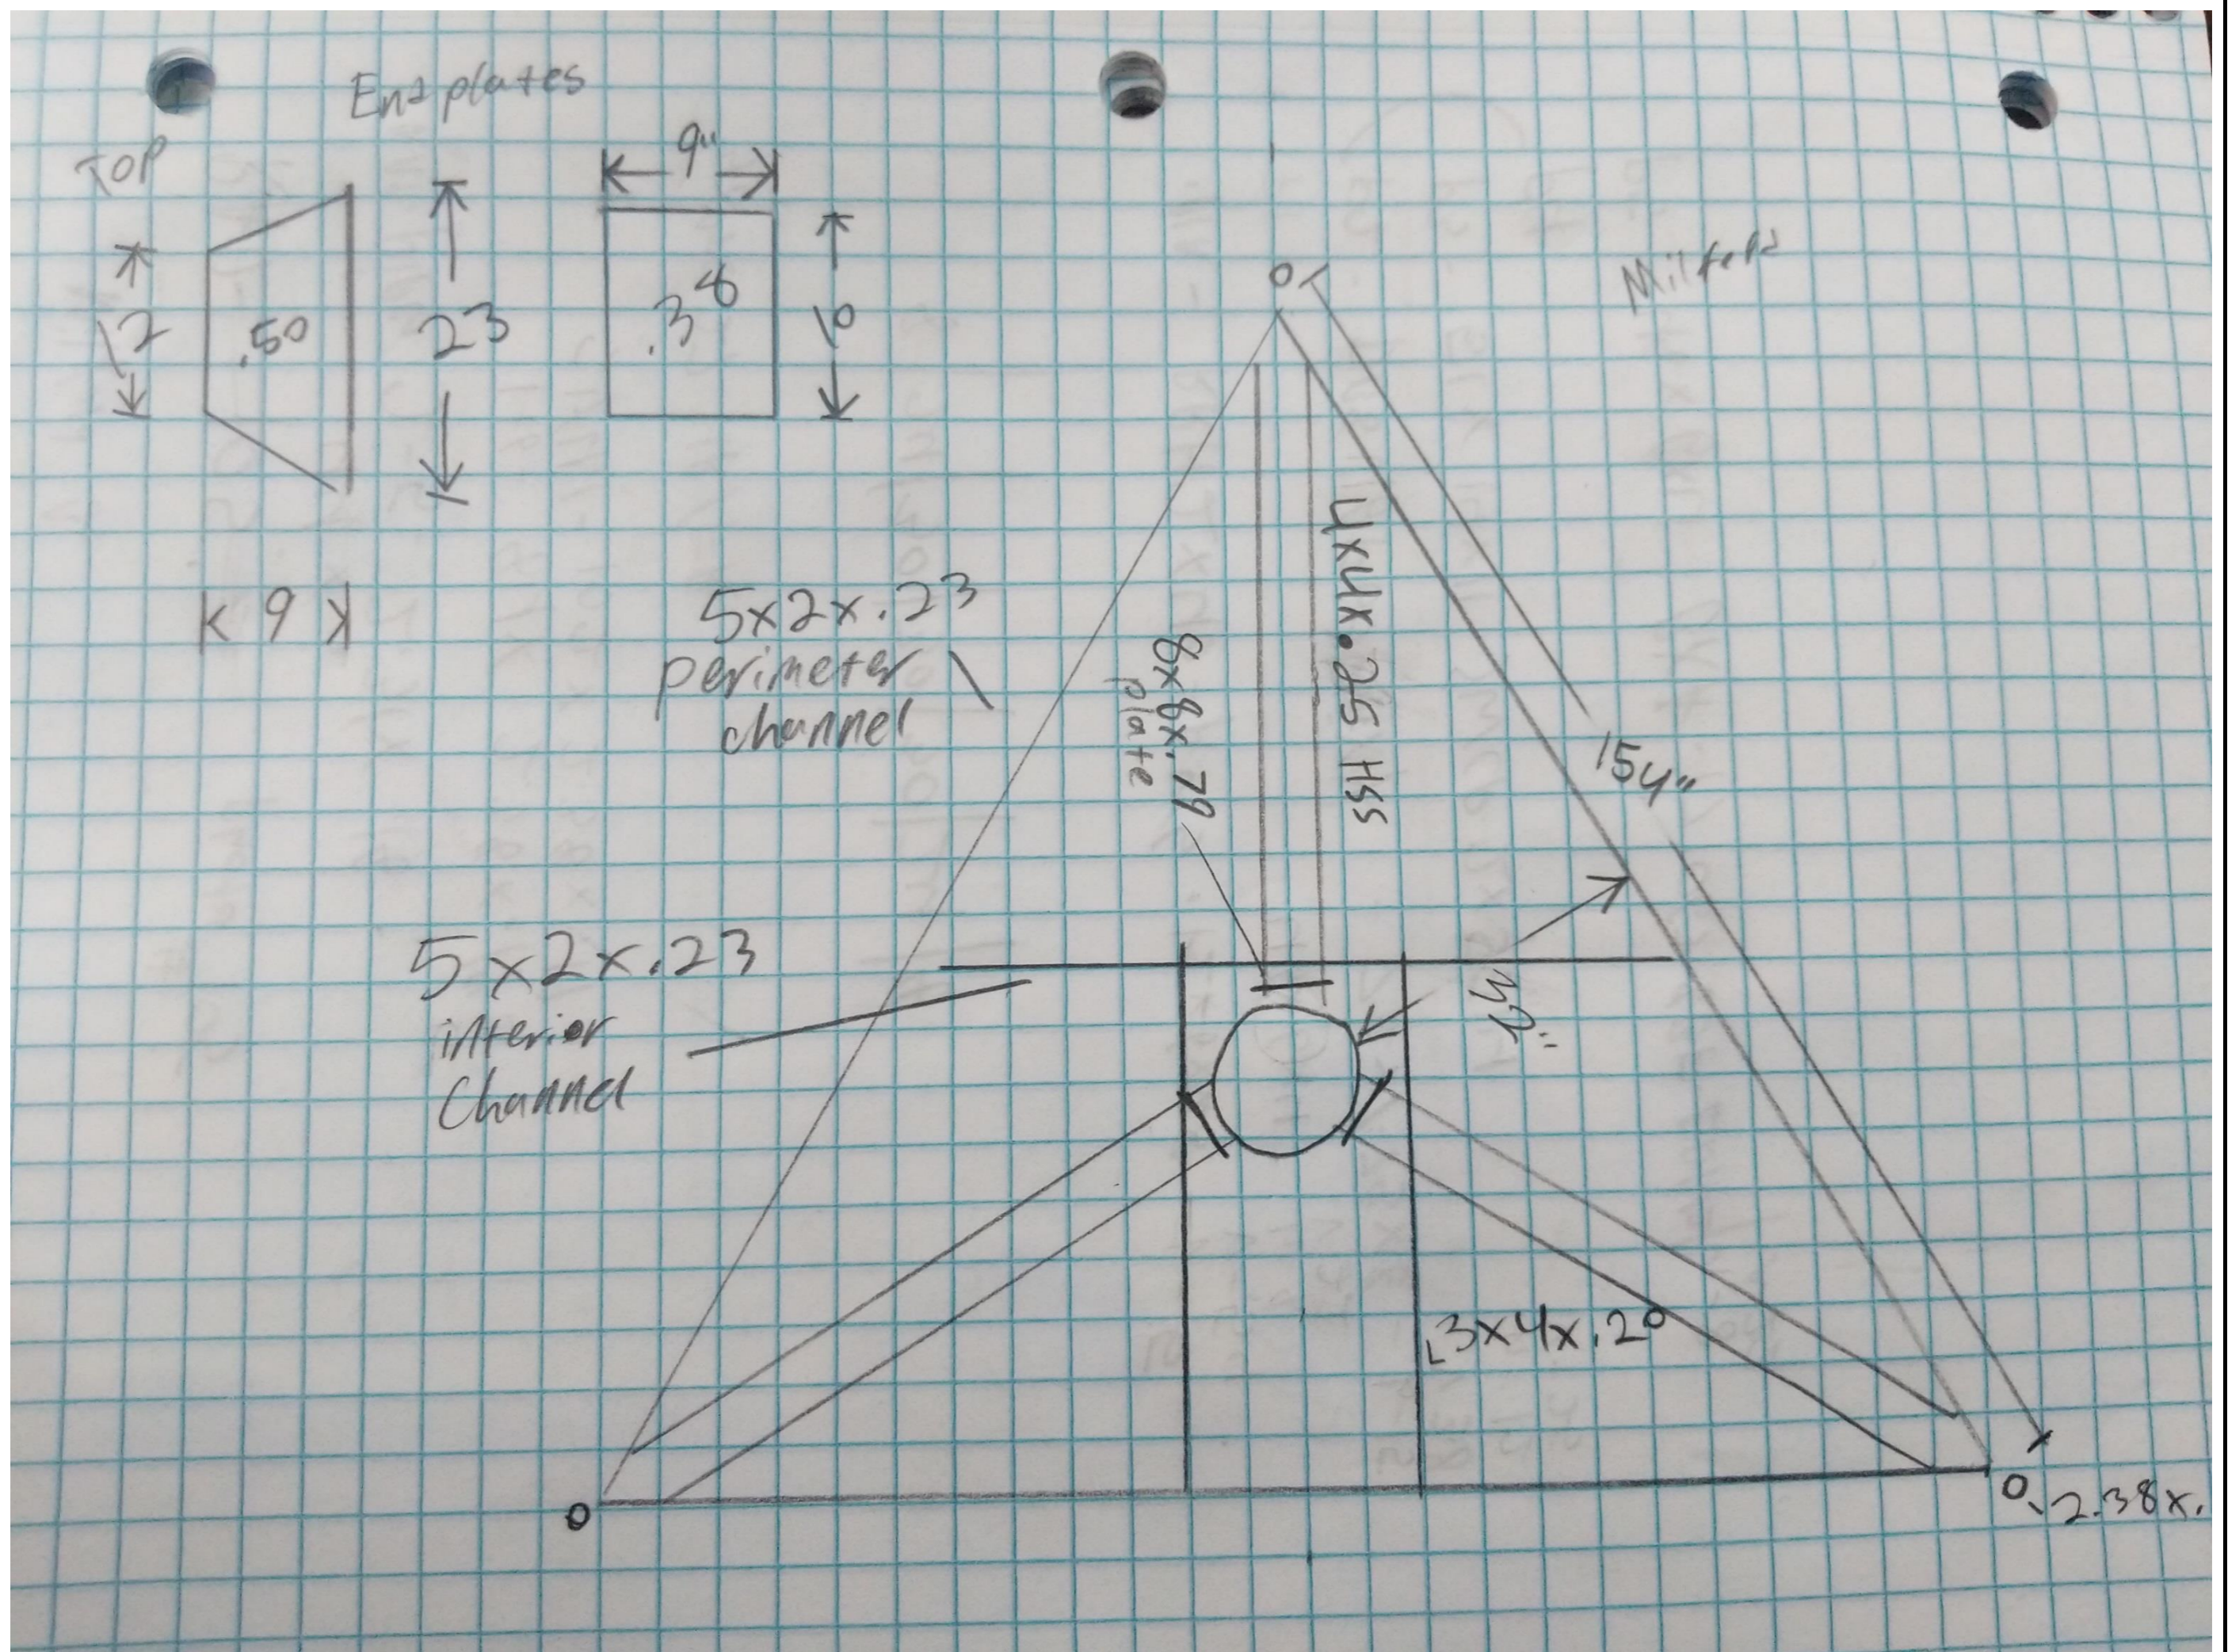



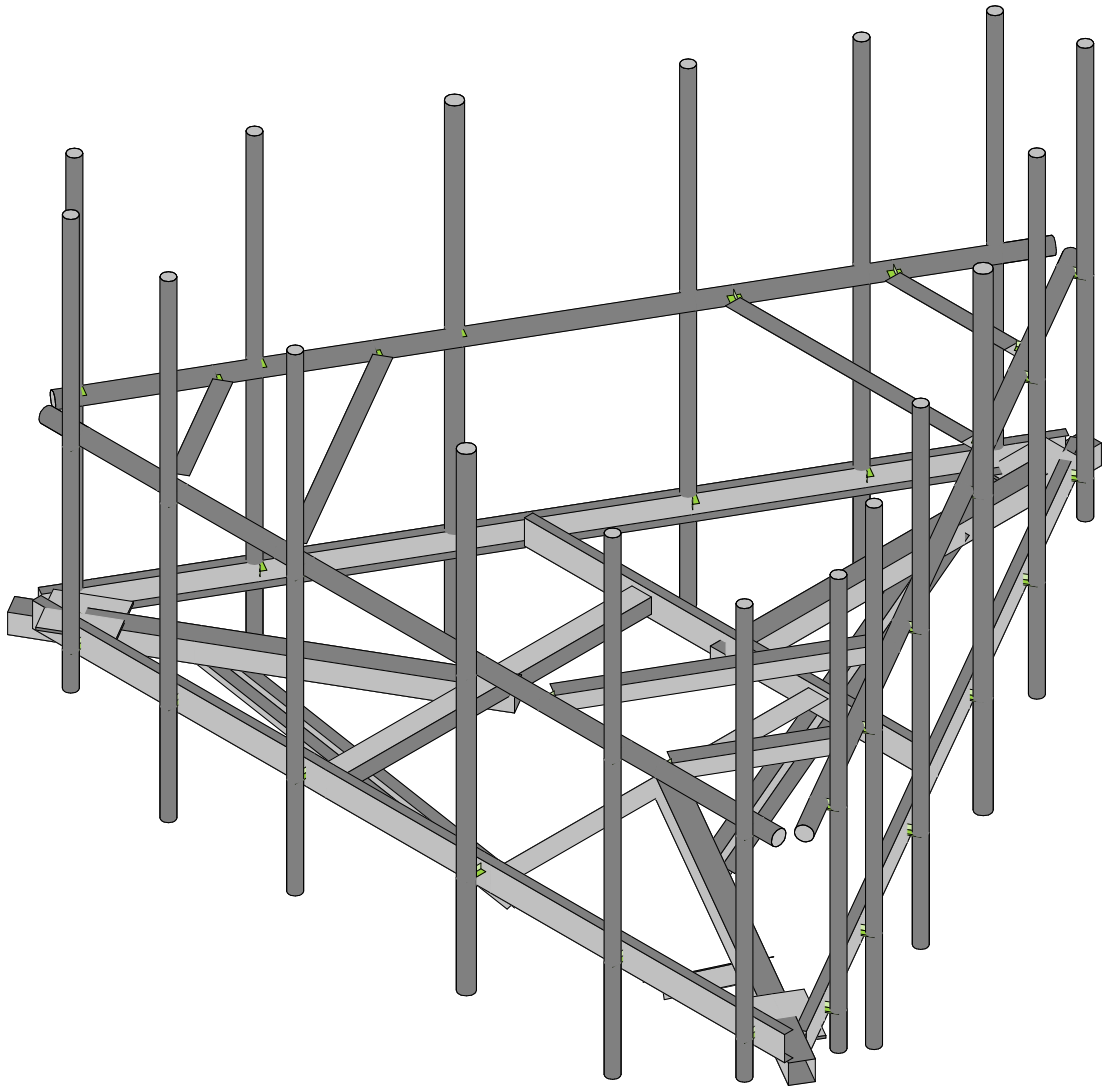

Envelope Only Solution

Maser Consulting




467373-VZW\_MT\_LO\_H

SK - 1

Jan 21, 2022 at 8:57 AM

LOADED\_467373-VZW\_MT\_LO\_...



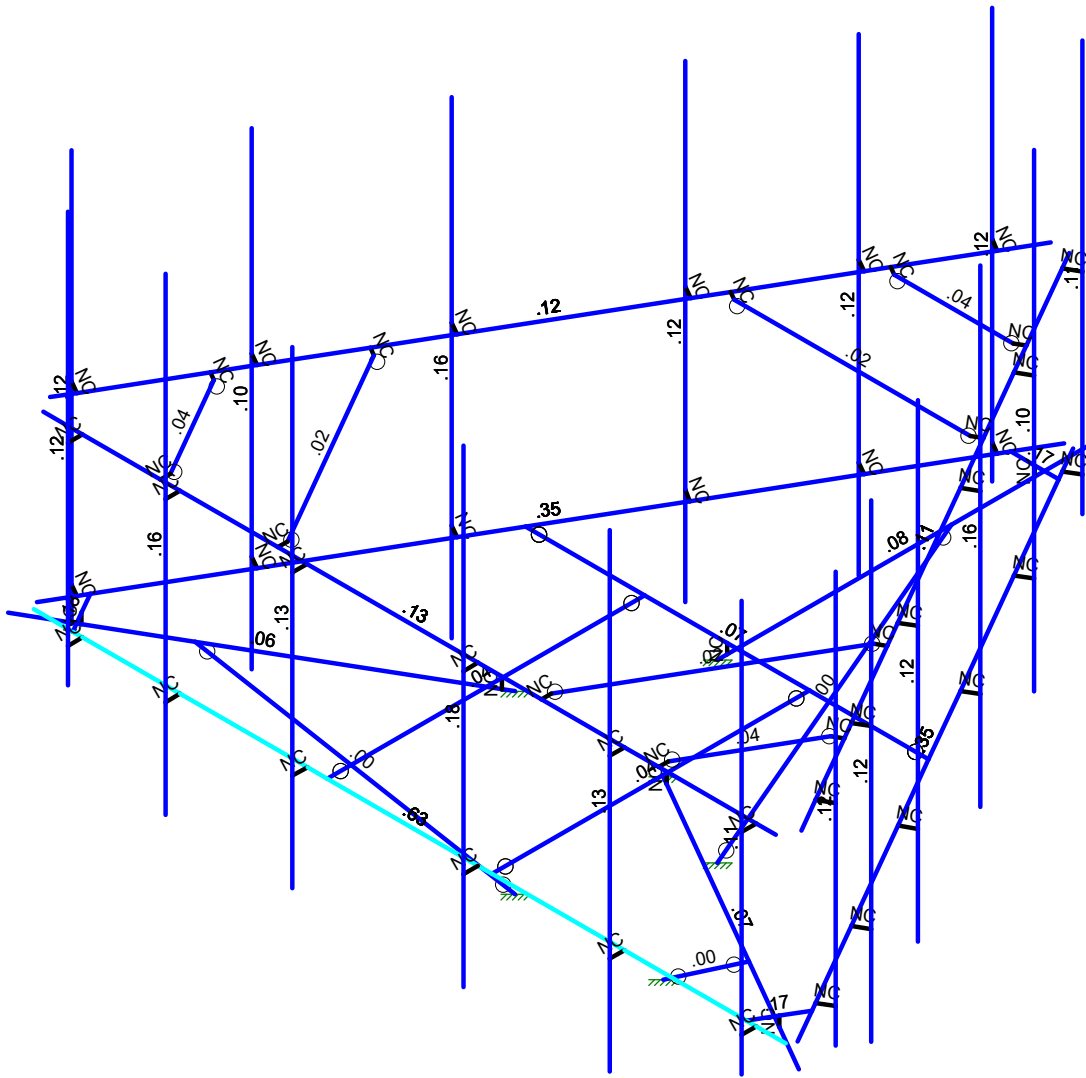

Member Shear Checks Displayed (Enveloped)  
Envelope Only Solution

Maser Consulting

467373-VZW\_MT\_LO\_H

SK - 3
Jan 21, 2022 at 8:57 AM
LOADED_467373-VZW_MT_LO_...

**Basic Load Cases**

	BLC Description	Category	X Gravity	Y Gravity	Z Gravity	Joint	Point	Distributed Area(Me...	Surface(P...
1	Antenna D	None					114		
2	Antenna Di	None					114		
3	Antenna Wo (0 Deg)	None					114		
4	Antenna Wo (30 Deg)	None					114		
5	Antenna Wo (60 Deg)	None					114		
6	Antenna Wo (90 Deg)	None					114		
7	Antenna Wo (120 Deg)	None					114		
8	Antenna Wo (150 Deg)	None					114		
9	Antenna Wo (180 Deg)	None					114		
10	Antenna Wo (210 Deg)	None					114		
11	Antenna Wo (240 Deg)	None					114		
12	Antenna Wo (270 Deg)	None					114		
13	Antenna Wo (300 Deg)	None					114		
14	Antenna Wo (330 Deg)	None					114		
15	Antenna Wi (0 Deg)	None					114		
16	Antenna Wi (30 Deg)	None					114		
17	Antenna Wi (60 Deg)	None					114		
18	Antenna Wi (90 Deg)	None					114		
19	Antenna Wi (120 Deg)	None					114		
20	Antenna Wi (150 Deg)	None					114		
21	Antenna Wi (180 Deg)	None					114		
22	Antenna Wi (210 Deg)	None					114		
23	Antenna Wi (240 Deg)	None					114		
24	Antenna Wi (270 Deg)	None					114		
25	Antenna Wi (300 Deg)	None					114		
26	Antenna Wi (330 Deg)	None					114		
27	Antenna Wm (0 Deg)	None					114		
28	Antenna Wm (30 Deg)	None					114		
29	Antenna Wm (60 Deg)	None					114		
30	Antenna Wm (90 Deg)	None					114		
31	Antenna Wm (120 De..	None					114		
32	Antenna Wm (150 De..	None					114		
33	Antenna Wm (180 De..	None					114		
34	Antenna Wm (210 De..	None					114		
35	Antenna Wm (240 De..	None					114		
36	Antenna Wm (270 De..	None					114		
37	Antenna Wm (300 De..	None					114		
38	Antenna Wm (330 De..	None					114		
39	Structure D	None		-1				6	
40	Structure Di	None						42	6
41	Structure Wo (0 Deg)	None						84	
42	Structure Wo (30 Deg)	None						84	
43	Structure Wo (60 Deg)	None						84	
44	Structure Wo (90 Deg)	None						84	
45	Structure Wo (120 D...	None						84	
46	Structure Wo (150 D...	None						84	
47	Structure Wo (180 D...	None						84	
48	Structure Wo (210 D...	None						84	
49	Structure Wo (240 D...	None						84	
50	Structure Wo (270 D...	None						84	
51	Structure Wo (300 D...	None						84	
52	Structure Wo (330 D...	None						84	
53	Structure Wi (0 Deg)	None						84	
54	Structure Wi (30 Deg)	None						84	
55	Structure Wi (60 Deg)	None						84	
56	Structure Wi (90 Deg)	None						84	
57	Structure Wi (120 De..	None						84	
58	Structure Wi (150 De..	None						84	





**Basic Load Cases (Continued)**

	BLC Description	Category	X Gravity	Y Gravity	Z Gravity	Joint	Point	Distributed Area(Me...	Surface(P...
59	Structure Wi (180 De...	None						84	
60	Structure Wi (210 De...	None						84	
61	Structure Wi (240 De...	None						84	
62	Structure Wi (270 De...	None						84	
63	Structure Wi (300 De...	None						84	
64	Structure Wi (330 De...	None						84	
65	Structure Wm (0 Deg)	None						84	
66	Structure Wm (30 De...	None						84	
67	Structure Wm (60 De...	None						84	
68	Structure Wm (90 De...	None						84	
69	Structure Wm (120 D...	None						84	
70	Structure Wm (150 D...	None						84	
71	Structure Wm (180 D...	None						84	
72	Structure Wm (210 D...	None						84	
73	Structure Wm (240 D...	None						84	
74	Structure Wm (270 D...	None						84	
75	Structure Wm (300 D...	None						84	
76	Structure Wm (330 D...	None						84	
77	Lm1	None					1		
78	Lm2	None					1		
79	Lv1	None					1		
80	Lv2	None					1		
81	Antenna Ev	None					114		
82	Antenna Eh (0 Deg)	None					76		
83	Antenna Eh (90 Deg)	None					76		
84	Structure Ev	ELY						6	
85	Structure Eh (0 Deg)	ELZ			-03			6	
86	Structure Eh (90 Deg)	ELX	.03					6	
87	BLC 39 Transient Are...	None						36	
88	BLC 40 Transient Are...	None						36	
89	BLC 84 Transient Are...	None							
90	BLC 85 Transient Are...	None						44	
91	BLC 86 Transient Are...	None						44	

**Load Combinations**

	Description	Solve	PDelta	S...	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	
1	1.2D+1.0Wo (0 ...	Yes	Y		1	1.2	39	1.2	3	1	41	1				
2	1.2D+1.0Wo (3...	Yes	Y		1	1.2	39	1.2	4	1	42	1				
3	1.2D+1.0Wo (6...	Yes	Y		1	1.2	39	1.2	5	1	43	1				
4	1.2D+1.0Wo (9...	Yes	Y		1	1.2	39	1.2	6	1	44	1				
5	1.2D+1.0Wo (1...	Yes	Y		1	1.2	39	1.2	7	1	45	1				
6	1.2D+1.0Wo (1...	Yes	Y		1	1.2	39	1.2	8	1	46	1				
7	1.2D+1.0Wo (1...	Yes	Y		1	1.2	39	1.2	9	1	47	1				
8	1.2D+1.0Wo (2...	Yes	Y		1	1.2	39	1.2	10	1	48	1				
9	1.2D+1.0Wo (2...	Yes	Y		1	1.2	39	1.2	11	1	49	1				
10	1.2D+1.0Wo (2...	Yes	Y		1	1.2	39	1.2	12	1	50	1				
11	1.2D+1.0Wo (3...	Yes	Y		1	1.2	39	1.2	13	1	51	1				
12	1.2D+1.0Wo (3...	Yes	Y		1	1.2	39	1.2	14	1	52	1				
13	1.2D + 1.0Di + ...	Yes	Y		1	1.2	39	1.2	2	1	40	1	15	1	53	1
14	1.2D + 1.0Di + ...	Yes	Y		1	1.2	39	1.2	2	1	40	1	16	1	54	1
15	1.2D + 1.0Di + ...	Yes	Y		1	1.2	39	1.2	2	1	40	1	17	1	55	1
16	1.2D + 1.0Di + ...	Yes	Y		1	1.2	39	1.2	2	1	40	1	18	1	56	1
17	1.2D + 1.0Di + ...	Yes	Y		1	1.2	39	1.2	2	1	40	1	19	1	57	1
18	1.2D + 1.0Di + ...	Yes	Y		1	1.2	39	1.2	2	1	40	1	20	1	58	1
19	1.2D + 1.0Di + ...	Yes	Y		1	1.2	39	1.2	2	1	40	1	21	1	59	1
20	1.2D + 1.0Di + ...	Yes	Y		1	1.2	39	1.2	2	1	40	1	22	1	60	1
21	1.2D + 1.0Di + ...	Yes	Y		1	1.2	39	1.2	2	1	40	1	23	1	61	1

**Load Combinations (Continued)**

Description	Solve	PDelta	S...	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..	BLCFac..
22	1.2D + 1.0Di + ...	Yes	Y	1	1.2	39	1.2	2	1	40	1	24	1	62	1
23	1.2D + 1.0Di + ...	Yes	Y	1	1.2	39	1.2	2	1	40	1	25	1	63	1
24	1.2D + 1.0Di + ...	Yes	Y	1	1.2	39	1.2	2	1	40	1	26	1	64	1
25	1.2D + 1.5Lm1...	Yes	Y	1	1.2	39	1.2	77	1.5	27	1	65	1		
26	1.2D + 1.5Lm1...	Yes	Y	1	1.2	39	1.2	77	1.5	28	1	66	1		
27	1.2D + 1.5Lm1...	Yes	Y	1	1.2	39	1.2	77	1.5	29	1	67	1		
28	1.2D + 1.5Lm1...	Yes	Y	1	1.2	39	1.2	77	1.5	30	1	68	1		
29	1.2D + 1.5Lm1...	Yes	Y	1	1.2	39	1.2	77	1.5	31	1	69	1		
30	1.2D + 1.5Lm1...	Yes	Y	1	1.2	39	1.2	77	1.5	32	1	70	1		
31	1.2D + 1.5Lm1...	Yes	Y	1	1.2	39	1.2	77	1.5	33	1	71	1		
32	1.2D + 1.5Lm1...	Yes	Y	1	1.2	39	1.2	77	1.5	34	1	72	1		
33	1.2D + 1.5Lm1...	Yes	Y	1	1.2	39	1.2	77	1.5	35	1	73	1		
34	1.2D + 1.5Lm1...	Yes	Y	1	1.2	39	1.2	77	1.5	36	1	74	1		
35	1.2D + 1.5Lm1...	Yes	Y	1	1.2	39	1.2	77	1.5	37	1	75	1		
36	1.2D + 1.5Lm1...	Yes	Y	1	1.2	39	1.2	77	1.5	38	1	76	1		
37	1.2D + 1.5Lm2...	Yes	Y	1	1.2	39	1.2	78	1.5	27	1	65	1		
38	1.2D + 1.5Lm2...	Yes	Y	1	1.2	39	1.2	78	1.5	28	1	66	1		
39	1.2D + 1.5Lm2...	Yes	Y	1	1.2	39	1.2	78	1.5	29	1	67	1		
40	1.2D + 1.5Lm2...	Yes	Y	1	1.2	39	1.2	78	1.5	30	1	68	1		
41	1.2D + 1.5Lm2...	Yes	Y	1	1.2	39	1.2	78	1.5	31	1	69	1		
42	1.2D + 1.5Lm2...	Yes	Y	1	1.2	39	1.2	78	1.5	32	1	70	1		
43	1.2D + 1.5Lm2...	Yes	Y	1	1.2	39	1.2	78	1.5	33	1	71	1		
44	1.2D + 1.5Lm2...	Yes	Y	1	1.2	39	1.2	78	1.5	34	1	72	1		
45	1.2D + 1.5Lm2...	Yes	Y	1	1.2	39	1.2	78	1.5	35	1	73	1		
46	1.2D + 1.5Lm2...	Yes	Y	1	1.2	39	1.2	78	1.5	36	1	74	1		
47	1.2D + 1.5Lm2...	Yes	Y	1	1.2	39	1.2	78	1.5	37	1	75	1		
48	1.2D + 1.5Lm2...	Yes	Y	1	1.2	39	1.2	78	1.5	38	1	76	1		
49	1.2D + 1.5Lv1	Yes	Y	1	1.2	39	1.2	79	1.5						
50	1.2D + 1.5Lv2	Yes	Y	1	1.2	39	1.2	80	1.5						
51	1.4D	Yes	Y	1	1.4	39	1.4								
52	1.2D + 1.0Ev + ...	Yes	Y	1	1.2	39	1.2	81	1	ELY	1	82	1	83	ELZ 1 ELX
53	1.2D + 1.0Ev + ...	Yes	Y	1	1.2	39	1.2	81	1	ELY	1	82	.866	83	.5 ELZ .866 ELX .5
54	1.2D + 1.0Ev + ...	Yes	Y	1	1.2	39	1.2	81	1	ELY	1	82	.5	83	.866 ELZ .5 ELX .866
55	1.2D + 1.0Ev + ...	Yes	Y	1	1.2	39	1.2	81	1	ELY	1	82		83	1 ELZ ELX 1
56	1.2D + 1.0Ev + ...	Yes	Y	1	1.2	39	1.2	81	1	ELY	1	82	-.5	83	.866 ELZ -.5 ELX .866
57	1.2D + 1.0Ev + ...	Yes	Y	1	1.2	39	1.2	81	1	ELY	1	82	-.866	83	.5 ELZ -.866 ELX .5
58	1.2D + 1.0Ev + ...	Yes	Y	1	1.2	39	1.2	81	1	ELY	1	82	-1	83	ELZ -1 ELX
59	1.2D + 1.0Ev + ...	Yes	Y	1	1.2	39	1.2	81	1	ELY	1	82	-.866	83	-.5 ELZ -.866 ELX -.5
60	1.2D + 1.0Ev + ...	Yes	Y	1	1.2	39	1.2	81	1	ELY	1	82	-.5	83	-.866 ELZ -.5 ELX -.866
61	1.2D + 1.0Ev + ...	Yes	Y	1	1.2	39	1.2	81	1	ELY	1	82		83	-1 ELZ ELX -1
62	1.2D + 1.0Ev + ...	Yes	Y	1	1.2	39	1.2	81	1	ELY	1	82	.5	83	-.866 ELZ .5 ELX -.866
63	1.2D + 1.0Ev + ...	Yes	Y	1	1.2	39	1.2	81	1	ELY	1	82	.866	83	-.5 ELZ .866 ELX -.5
64	0.9D - 1.0Ev + ...	Yes	Y	1	.9	39	.9	81	-1	ELY	-1	82	1	83	ELZ 1 ELX
65	0.9D - 1.0Ev + ...	Yes	Y	1	.9	39	.9	81	-1	ELY	-1	82	.866	83	.5 ELZ .866 ELX .5
66	0.9D - 1.0Ev + ...	Yes	Y	1	.9	39	.9	81	-1	ELY	-1	82	.5	83	.866 ELZ .5 ELX .866
67	0.9D - 1.0Ev + ...	Yes	Y	1	.9	39	.9	81	-1	ELY	-1	82		83	1 ELZ ELX 1
68	0.9D - 1.0Ev + ...	Yes	Y	1	.9	39	.9	81	-1	ELY	-1	82	-.5	83	.866 ELZ -.5 ELX .866
69	0.9D - 1.0Ev + ...	Yes	Y	1	.9	39	.9	81	-1	ELY	-1	82	-.866	83	.5 ELZ -.866 ELX .5
70	0.9D - 1.0Ev + ...	Yes	Y	1	.9	39	.9	81	-1	ELY	-1	82	-1	83	ELZ -1 ELX
71	0.9D - 1.0Ev + ...	Yes	Y	1	.9	39	.9	81	-1	ELY	-1	82	-.866	83	-.5 ELZ -.866 ELX -.5
72	0.9D - 1.0Ev + ...	Yes	Y	1	.9	39	.9	81	-1	ELY	-1	82	-.5	83	-.866 ELZ -.5 ELX -.866
73	0.9D - 1.0Ev + ...	Yes	Y	1	.9	39	.9	81	-1	ELY	-1	82		83	-1 ELZ ELX -1
74	0.9D - 1.0Ev + ...	Yes	Y	1	.9	39	.9	81	-1	ELY	-1	82	.5	83	-.866 ELZ .5 ELX -.866
75	0.9D - 1.0Ev + ...	Yes	Y	1	.9	39	.9	81	-1	ELY	-1	82	.866	83	-.5 ELZ .866 ELX -.5



**Joint Coordinates and Temperatures**

	Label	X [ft]	Y [ft]	Z [ft]	Temp [F]	Detach From Diap...
1	CP	0	-0.75	0	0	
2	N2	-0.	0	-1.458333	0	
3	N3	-0.	0	-7.791667	0	
4	N4	-0.	0	-6.875	0	
5	N13	6.416652	0.166667	3.791667	0	
6	N14	-6.416681	0.166667	3.791667	0	
7	N9	-0.	0.166667	-6.875	0	
8	N24	-0.	0	-1.625	0	
9	N29	-0.	0.166667	-1.625	0	
10	N30	-1.407291	0.166667	-1.625	0	
11	N33A	1.407291	0.166667	-1.625	0	
12	N20	-1.407291	0.166667	3.791667	0	
13	N21	1.407291	0.166667	3.791667	0	
14	N18	0.075354	0.166667	-7.452817	0	
15	N19	6.49202	0.166667	3.661176	0	
16	N22	-6.492006	0.166667	3.66115	0	
17	N23	-0.075339	0.166667	-7.452842	0	
18	N26	0.408956	0.166667	-6.875	0	
19	N27	-0.408956	0.166667	-6.875	0	
20	N28	3.440045	0.166667	-1.625	0	
21	N29A	-3.440045	0.166667	-1.625	0	
22	N22A	-1.262954	0	0.729167	0	
23	N23A	-6.747781	0	3.895833	0	
24	N24A	1.262954	0	0.729167	0	
25	N25	6.747781	0	3.895833	0	
26	N28A	-1.407291	0	0.8125	0	
27	N29B	-1.407291	0.166667	0.8125	0	
28	N36	1.407291	0	0.8125	0	
29	N37	1.407291	0.166667	0.8125	0	
30	N30A	-5.953925	0	3.4375	0	
31	N31	-5.953925	0.166667	3.4375	0	
32	N32	-6.158403	0.166667	3.083333	0	
33	N33	-5.749446	0.166667	3.791667	0	
34	N34	5.953925	0	3.4375	0	
35	N35	5.953925	0.166667	3.4375	0	
36	N36A	5.749446	0.166667	3.791667	0	
37	N37A	6.158403	0.166667	3.083333	0	
38	N44A	-0.	0.083333	-7.583333	0	
39	N56A	6.249985	3.166667	3.791667	0	
40	N57A	-6.250015	3.166667	3.791667	0	
41	N65	5.916652	-0.416667	4.041667	0	
42	N66A	5.916652	3.166667	4.041667	0	
43	N68	3.666652	3.166667	3.791667	0	
44	N70	1.166652	3.166667	3.791667	0	
45	N72	-1.750015	3.166667	3.791667	0	
46	N74	-3.916681	3.166667	3.791667	0	
47	N75	-5.583319	-0.416667	4.041667	0	
48	N76	-5.583319	3.166667	4.041667	0	
49	N78	5.916652	3.166667	3.791667	0	
50	N80	-5.583319	3.166667	3.791667	0	
51	N81	5.916652	6.583333	4.041667	0	
52	N82	-5.583319	6.583333	4.041667	0	
53	N87	3.666652	-1.5	4.041667	0	
54	N88	3.666652	6.5	4.041667	0	
55	N90	0.916652	1.75	3.791667	0	
56	N93	1.166652	-1.5	4.041667	0	
57	N94	1.166652	6.5	4.041667	0	
58	N99	-1.750015	-1.5	4.041667	0	



**Joint Coordinates and Temperatures (Continued)**

	Label	X [ft]	Y [ft]	Z [ft]	Temp [F]	Detach From Diap...
59	N100	-1.750015	6.5	4.041667	0	
60	N105	-3.916681	-1.5	4.041667	0	
61	N106	-3.916681	6.5	4.041667	0	
62	N131	3.666652	3.166667	4.041667	0	
63	N132	1.166652	3.166667	4.041667	0	
64	N133	-1.750015	3.166667	4.041667	0	
65	N134	-3.916681	3.166667	4.041667	0	
66	N69	5.916652	0.166667	4.041667	0	
67	N70A	3.666652	0.166667	3.791667	0	
68	N71	1.166652	0.166667	3.791667	0	
69	N73	-3.916681	0.166667	3.791667	0	
70	N74A	-5.583319	0.166667	4.041667	0	
71	N75A	5.916652	0.166667	3.791667	0	
72	N76A	-5.583319	0.166667	3.791667	0	
73	N77	3.666652	0.166667	4.041667	0	
74	N78A	1.166652	0.166667	4.041667	0	
75	N79	-1.750015	0.166667	4.041667	0	
76	N80A	-3.916681	0.166667	4.041667	0	
77	N80B	-1.740625	0.166667	3.791667	0	
78	N83	0.54186	-0.416667	-7.144804	0	
79	N84	0.54186	3.166667	-7.144804	0	
80	N85	1.450354	3.166667	-5.071247	0	
81	N86	2.700354	3.166667	-2.906184	0	
82	N87A	4.158687	3.166667	-0.380276	0	
83	N88A	5.24202	3.166667	1.496112	0	
84	N89	6.291845	-0.416667	2.814463	0	
85	N90A	6.291845	3.166667	2.814463	0	
86	N91	0.325354	3.166667	-7.019804	0	
87	N92	6.075346	3.166667	2.939475	0	
88	N93A	0.54186	6.583333	-7.144804	0	
89	N94A	6.291845	6.583333	2.814463	0	
90	N95	1.66686	-1.5	-5.196247	0	
91	N96	1.66686	6.5	-5.196247	0	
92	N97	2.825354	1.75	-2.689677	0	
93	N98	2.91686	-1.5	-3.031184	0	
94	N99A	2.91686	6.5	-3.031184	0	
95	N100A	4.375193	-1.5	-0.505276	0	
96	N101	4.375193	6.5	-0.505276	0	
97	N102	5.458527	-1.5	1.371112	0	
98	N103	5.458527	6.5	1.371112	0	
99	N104	1.66686	3.166667	-5.196247	0	
100	N105A	2.91686	3.166667	-3.031184	0	
101	N106A	4.375193	3.166667	-0.505276	0	
102	N107	5.458527	3.166667	1.371112	0	
103	N108	0.54186	0.166667	-7.144804	0	
104	N109	1.450354	0.166667	-5.071247	0	
105	N110	2.700354	0.166667	-2.906184	0	
106	N111	5.24202	0.166667	1.496112	0	
107	N112	6.291845	0.166667	2.814463	0	
108	N113	0.325354	0.166667	-7.019804	0	
109	N114	6.075346	0.166667	2.939475	0	
110	N115	1.66686	0.166667	-5.196247	0	
111	N116	2.91686	0.166667	-3.031184	0	
112	N117	4.375193	0.166667	-0.505276	0	
113	N118	5.458527	0.166667	1.371112	0	
114	N119	4.153992	0.166667	-0.388408	0	
115	N122	-6.458512	-0.416667	3.103138	0	
116	N123	-6.458512	3.166667	3.103138	0	
117	N124	-5.117006	3.166667	1.27958	0	



**Joint Coordinates and Temperatures (Continued)**

	Label	X [ft]	Y [ft]	Z [ft]	Temp [F]	Detach From Diap...
118	N125	-3.867006	3.166667	-0.885483	0	
119	N126	-2.408672	3.166667	-3.41139	0	
120	N127	-1.325339	3.166667	-5.287779	0	
121	N128	-0.708527	-0.416667	-6.856129	0	
122	N129	-0.708527	3.166667	-6.856129	0	
123	N130	-6.242006	3.166667	3.228138	0	
124	N131A	-0.492013	3.166667	-6.731142	0	
125	N132A	-6.458512	6.583333	3.103138	0	
126	N133A	-0.708527	6.583333	-6.856129	0	
127	N134A	-5.333512	-1.5	1.15458	0	
128	N135	-5.333512	6.5	1.15458	0	
129	N136	-3.742006	1.75	-1.101989	0	
130	N137	-4.083512	-1.5	-1.010483	0	
131	N138	-4.083512	6.5	-1.010483	0	
132	N139	-2.625179	-1.5	-3.53639	0	
133	N140	-2.625179	6.5	-3.53639	0	
134	N141	-1.541845	-1.5	-5.412779	0	
135	N142	-1.541845	6.5	-5.412779	0	
136	N143	-5.333512	3.166667	1.15458	0	
137	N144	-4.083512	3.166667	-1.010483	0	
138	N145	-2.625179	3.166667	-3.53639	0	
139	N146	-1.541845	3.166667	-5.412779	0	
140	N147	-6.458512	0.166667	3.103138	0	
141	N148	-5.117006	0.166667	1.27958	0	
142	N149	-3.867006	0.166667	-0.885483	0	
143	N150	-1.325339	0.166667	-5.287779	0	
144	N151	-0.708527	0.166667	-6.856129	0	
145	N152	-6.242006	0.166667	3.228138	0	
146	N153	-0.492013	0.166667	-6.731142	0	
147	N154	-5.333512	0.166667	1.15458	0	
148	N155	-4.083512	0.166667	-1.010483	0	
149	N156	-2.625179	0.166667	-3.53639	0	
150	N157	-1.541845	0.166667	-5.412779	0	
151	N158	-2.413367	0.166667	-3.403258	0	
152	N155A	4.249985	3.166667	3.791667	0	
153	N156A	-4.250015	3.166667	3.791667	0	
154	N157A	0.158687	3.166667	-7.308479	0	
155	N158A	6.408687	3.166667	3.516838	0	
156	N159	1.158687	3.166667	-5.576429	0	
157	N160	5.408687	3.166667	1.784787	0	
158	N161	-6.408672	3.166667	3.516813	0	
159	N162	-0.158672	3.166667	-7.308505	0	
160	N163	-5.408672	3.166667	1.784762	0	
161	N164	-1.158672	3.166667	-5.576454	0	
162	N165	4.249985	3.166667	3.625	0	
163	N166	-4.250015	3.166667	3.625	0	
164	N169	1.014349	3.166667	-5.493095	0	
165	N170	5.264349	3.166667	1.868121	0	
166	N173	-5.264335	3.166667	1.868095	0	
167	N174	-1.014335	3.166667	-5.493121	0	
168	N171	-0.	-3	-1.458333	0	
169	N172	-0.	0	-5.458333	0	
170	N174A	-1.262954	-3	0.729167	0	
171	N175	-4.727055	0	2.729167	0	
172	N177	1.262954	-3	0.729167	0	
173	N178	4.727055	0	2.729167	0	
174	N177A	2.249985	3.166667	3.625	0	
175	N178A	-2.250015	3.166667	3.625	0	
176	N179	2.158687	3.166667	-3.844378	0	



### Joint Coordinates and Temperatures (Continued)

	Label	X [ft]	Y [ft]	Z [ft]	Temp [F]	Detach From Diap...
177	N180	4.408687	3.166667	0.052736	0	
178	N181	-4.408672	3.166667	0.052711	0	
179	N182	-2.158687	3.166667	-3.844378	0	
180	N180A	2.249985	3.166667	3.791667	0	
181	N181A	-2.250015	3.166667	3.791667	0	
182	N182A	2.014349	3.166667	-3.761045	0	
183	N183	4.264349	3.166667	0.13607	0	
184	N186	-4.264335	3.166667	0.136044	0	
185	N187	-2.014335	3.166667	-3.76107	0	

### Hot Rolled Steel Section Sets

	Label	Shape	Type	Design List	Material	Design R...	A [in2]	Iyy [in4]	Izz [in4]	J [in4]
1	Antenna Pipe	PIPE 2.0	Column	Pipe	A53 Gr. B	Typical	1.02	.627	.627	1.25
2	MOD Support Rail	PIPE 2.5	Column	Pipe	A53 Gr. B	Typical	1.61	1.45	1.45	2.89
3	Face Horizontal	C5X6.7	Column	Channel	A36 Gr.36	Typical	1.97	.47	7.48	.055
4	Standoff Horizontal	HSS4X4X4	Beam	SquareTube	A500 Gr. B 46	Typical	3.37	7.8	7.8	12.8
5	Support Rail	L3X3X4	Column	Single Angle	A36 Gr.36	Typical	1.44	1.23	1.23	.031
6	MOD Support Rail...	L3X3X4	Column	Single Angle	A36 Gr.36	Typical	1.44	1.23	1.23	.031
7	MOD SUPPORT ...	L3X3X4	Column	Single Angle	A36 Gr.36	Typical	1.44	1.23	1.23	.031
8	MOD KICKER	LL3x3x3x6	Column	Single Angle	A36 Gr.36	Typical	2.18	4.97	1.9	.027
9	Crossmember	C5X6.7	Column	Channel	A36 Gr.36	Typical	1.97	.47	7.48	.055
10	Crossmember An...	L4X3X4	Column	Single Angle	A36 Gr.36	Typical	1.69	1.33	2.75	.039
11	TES ANGLE	L4x3x3	Column	Single Angle	A36 Gr.36	Typical	1.277	1.046	2.127	.014
12	Face Bracing	L3X3X4	Column	Single Angle	A36 Gr.36	Typical	1.44	1.23	1.23	.031
13	Connection Plate	PL1/2X12_HRB	Column	RECT	A36 Gr.36	Typical	8.75	.182	223.307	.716
14	Threaded Rod	SR 0.625	Column	BAR	A36 Gr.36	Typical	.307	.007	.007	.015
15	TES PLATE	PL1/2x10	Column	Pipe	A36 Gr.36	Typical	5	.104	41.667	.404
16	Pipe 2.5	PIPE 2.5	Column	Pipe	A53 Gr. B	Typical	1.61	1.45	1.45	2.89

### Hot Rolled Steel Properties

	Label	E [ksi]	G [ksi]	Nu	Therm (/1E...Density[k/ft...	Yield[ksi]	Ry	Fu[ksi]	Rt	
1	A36 Gr.36	29000	11154	.3	.65	.49	36	1.5	58	1.2
2	A53 Gr. B	29000	11154	.3	.65	.49	35	1.5	60	1.2
3	A572 Gr.50	29000	11154	.3	.65	.49	50	1.1	65	1.1
4	A992	29000	11154	.3	.65	.49	50	1.1	65	1.1
5	A500 Gr. B 42	29000	11154	.3	.65	.49	42	1.4	58	1.3
6	A500 Gr. B 46	29000	11154	.3	.65	.49	46	1.4	58	1.3

### Member Primary Data

	Label	I Joint	J Joint	K Joint	Rotate(deg)	Section/Shape	Type	Design List	Material	Design Rules
1	M1	N2	N3			Standoff Horiz...	Beam	SquareTube	A500 Gr. ...	Typical
2	M2	N27	N26		90	Connection Pl...	Column	RECT	A36 Gr.36	Typical
3	FACE	N14	N13		180	Face Horizontal	Column	Channel	A36 Gr.36	Typical
4	M6	N9	N4			RIGID	None	None	RIGID	Typical
5	M17	N29A	N28		180	Crossmember	Column	Channel	A36 Gr.36	Typical
6	M14A	N29	N24			RIGID	None	None	RIGID	Typical
7	M8	N19	N18		180	Face Horizontal	Column	Channel	A36 Gr.36	Typical
8	M9	N23	N22		180	Face Horizontal	Column	Channel	A36 Gr.36	Typical
9	M9A	N21	N33A		90	Crossmember ...	Column	Single Angle	A36 Gr.36	Typical
10	M10	N30	N20		90	Crossmember ...	Column	Single Angle	A36 Gr.36	Typical
11	M11	N22A	N23A			Standoff Horiz...	Beam	SquareTube	A500 Gr. ...	Typical
12	M12	N24A	N25			Standoff Horiz...	Beam	SquareTube	A500 Gr. ...	Typical
13	M13	N29B	N28A			RIGID	None	None	RIGID	Typical
14	M14	N37	N36			RIGID	None	None	RIGID	Typical

**Member Primary Data (Continued)**

	Label	I Joint	J Joint	K Joint	Rotate(deg)	Section/Shape	Type	Design List	Material	Design Rules
15	M15	N33	N32		90	Connection Pl...	Column	RECT	A36 Gr.36	Typical
16	M16	N31	N30A			RIGID	None	None	RIGID	Typical
17	M17A	N37A	N36A		90	Connection Pl...	Column	RECT	A36 Gr.36	Typical
18	M18	N35	N34			RIGID	None	None	RIGID	Typical
19	OVP	N57A	N56A			MOD Support ...	Column	Pipe	A53 Gr. B	Typical
20	MP1A	N81	N65			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
21	MP6A	N82	N75			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
22	M52	N76	N80			RIGID	None	None	RIGID	Typical
23	M55	N66A	N78			RIGID	None	None	RIGID	Typical
24	MP2A	N88	N87			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
25	MP3A	N94	N93			Pipe 2.5	Column	Pipe	A53 Gr. B	Typical
26	MP4A	N100	N99			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
27	MP5A	N106	N105			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
28	M94	N74	N134			RIGID	None	None	RIGID	Typical
29	M95	N72	N133			RIGID	None	None	RIGID	Typical
30	M96	N70	N132			RIGID	None	None	RIGID	Typical
31	M97	N68	N131			RIGID	None	None	RIGID	Typical
32	M38	N74A	N76A			RIGID	None	None	RIGID	Typical
33	M39	N69	N75A			RIGID	None	None	RIGID	Typical
34	M40	N73	N80A			RIGID	None	None	RIGID	Typical
35	LIVE1	N80B	N79			RIGID	None	None	RIGID	Typical
36	M42	N71	N78A			RIGID	None	None	RIGID	Typical
37	LIVE2	N70A	N77			RIGID	None	None	RIGID	Typical
38	MP1C	N93A	N83			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
39	MP6C	N94A	N89			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
40	M47	N90A	N92			RIGID	None	None	RIGID	Typical
41	M48	N84	N91			RIGID	None	None	RIGID	Typical
42	MP2C	N96	N95			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
43	MP3C	N99A	N98			Pipe 2.5	Column	Pipe	A53 Gr. B	Typical
44	MP4C	N101	N100A			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
45	MP5C	N103	N102			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
46	M53	N88A	N107			RIGID	None	None	RIGID	Typical
47	M54	N87A	N106A			RIGID	None	None	RIGID	Typical
48	M55A	N86	N105A			RIGID	None	None	RIGID	Typical
49	M56	N85	N104			RIGID	None	None	RIGID	Typical
50	M57	N112	N114			RIGID	None	None	RIGID	Typical
51	M58	N108	N113			RIGID	None	None	RIGID	Typical
52	M59	N111	N118			RIGID	None	None	RIGID	Typical
53	M60	N119	N117			RIGID	None	None	RIGID	Typical
54	M61	N110	N116			RIGID	None	None	RIGID	Typical
55	M62	N109	N115			RIGID	None	None	RIGID	Typical
56	MP1B	N132A	N122			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
57	MP6B	N133A	N128			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
58	M66	N129	N131A			RIGID	None	None	RIGID	Typical
59	M67	N123	N130			RIGID	None	None	RIGID	Typical
60	MP2B	N135	N134A			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
61	MP3B	N138	N137			Pipe 2.5	Column	Pipe	A53 Gr. B	Typical
62	MP4B	N140	N139			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
63	MP5B	N142	N141			Antenna Pipe	Column	Pipe	A53 Gr. B	Typical
64	M72	N127	N146			RIGID	None	None	RIGID	Typical
65	M73	N126	N145			RIGID	None	None	RIGID	Typical
66	M74	N125	N144			RIGID	None	None	RIGID	Typical
67	M75	N124	N143			RIGID	None	None	RIGID	Typical
68	M76	N151	N153			RIGID	None	None	RIGID	Typical
69	M77	N147	N152			RIGID	None	None	RIGID	Typical
70	M78	N150	N157			RIGID	None	None	RIGID	Typical
71	M79	N158	N156			RIGID	None	None	RIGID	Typical
72	M80	N149	N155			RIGID	None	None	RIGID	Typical
73	M81	N148	N154			RIGID	None	None	RIGID	Typical

**Member Primary Data (Continued)**

	Label	I Joint	J Joint	K Joint	Rotate(deg)	Section/Shape	Type	Design List	Material	Design Rules
74	M80A	N158A	N157A			MOD Support ...	Column	Pipe	A53 Gr. B	Typical
75	M81A	N162	N161			MOD Support ...	Column	Pipe	A53 Gr. B	Typical
76	M82	N155A	N165			RIGID	None	None	RIGID	Typical
77	M83	N156A	N166			RIGID	None	None	RIGID	Typical
78	M84	N159	N169			RIGID	None	None	RIGID	Typical
79	M85	N160	N170			RIGID	None	None	RIGID	Typical
80	M86	N163	N173			RIGID	None	None	RIGID	Typical
81	M87	N164	N174			RIGID	None	None	RIGID	Typical
82	M88	N173	N166		180	MOD Support ...	Column	Single Angle	A36 Gr.36	Typical
83	M95A	N165	N170		180	MOD Support ...	Column	Single Angle	A36 Gr.36	Typical
84	M102	N169	N174		180	MOD Support ...	Column	Single Angle	A36 Gr.36	Typical
85	M91	N171	N172			MOD KICKER	Column	Single Angle	A36 Gr.36	Typical
86	M92	N174A	N175			MOD KICKER	Column	Single Angle	A36 Gr.36	Typical
87	M93	N177	N178			MOD KICKER	Column	Single Angle	A36 Gr.36	Typical
88	M94A	N186	N178A		180	MOD SUPPO...	Column	Single Angle	A36 Gr.36	Typical
89	M95B	N177A	N183		180	MOD SUPPO...	Column	Single Angle	A36 Gr.36	Typical
90	M96A	N182A	N187		180	MOD SUPPO...	Column	Single Angle	A36 Gr.36	Typical
91	M91A	N181A	N178A			RIGID	None	None	RIGID	Typical
92	M92A	N180A	N177A			RIGID	None	None	RIGID	Typical
93	M93A	N180	N183			RIGID	None	None	RIGID	Typical
94	M94B	N179	N182A			RIGID	None	None	RIGID	Typical
95	M95C	N182	N187			RIGID	None	None	RIGID	Typical
96	M96B	N181	N186			RIGID	None	None	RIGID	Typical

**Member Advanced Data**

	Label	I Release	J Release	I Offset[in]	J Offset[in]	T/C Only	Physical	Defl Rat...	Analysis ...	Inactive	Seismic...
1	M1						Yes				None
2	M2						Yes	** NA **			None
3	FACE						Yes	** NA **			None
4	M6						Yes	** NA **			None
5	M17	OOOOOX	OOOOOX				Yes	** NA **			None
6	M14A					Compres...	Yes	** NA **			None
7	M8						Yes	** NA **			None
8	M9						Yes	** NA **			None
9	M9A	OOOOXO	OOOOXO				Yes	** NA **			None
10	M10	OOOOXO	OOOOXO				Yes	** NA **			None
11	M11						Yes				None
12	M12						Yes				None
13	M13					Compres...	Yes	** NA **			None
14	M14					Compres...	Yes	** NA **			None
15	M15						Yes	** NA **			None
16	M16						Yes	** NA **			None
17	M17A						Yes	** NA **			None
18	M18						Yes	** NA **			None
19	OVP						Yes	** NA **			None
20	MP1A						Yes	** NA **			None
21	MP6A						Yes	** NA **			None
22	M52						Yes	** NA **			None
23	M55						Yes	** NA **			None
24	MP2A						Yes	** NA **			None
25	MP3A						Yes	** NA **			None
26	MP4A						Yes	** NA **			None
27	MP5A						Yes	** NA **			None
28	M94						Yes	** NA **			None
29	M95						Yes	** NA **			None
30	M96						Yes	** NA **			None
31	M97						Yes	** NA **			None



**Member Advanced Data (Continued)**

	Label	I Release	J Release	I Offset[in]	J Offset[in]	T/C Only	Physical	Defl Rat...	Analysis ...	Inactive	Seismic...
32	M38						Yes	** NA **			None
33	M39						Yes	** NA **			None
34	M40						Yes	** NA **			None
35	LIVE1						Yes	** NA **			None
36	M42						Yes	** NA **			None
37	LIVE2						Yes	** NA **			None
38	MP1C						Yes	** NA **			None
39	MP6C						Yes	** NA **			None
40	M47						Yes	** NA **			None
41	M48						Yes	** NA **			None
42	MP2C						Yes	** NA **			None
43	MP3C						Yes	** NA **			None
44	MP4C						Yes	** NA **			None
45	MP5C						Yes	** NA **			None
46	M53						Yes	** NA **			None
47	M54						Yes	** NA **			None
48	M55A						Yes	** NA **			None
49	M56						Yes	** NA **			None
50	M57						Yes	** NA **			None
51	M58						Yes	** NA **			None
52	M59						Yes	** NA **			None
53	M60						Yes	** NA **			None
54	M61						Yes	** NA **			None
55	M62						Yes	** NA **			None
56	MP1B						Yes	** NA **			None
57	MP6B						Yes	** NA **			None
58	M66						Yes	** NA **			None
59	M67						Yes	** NA **			None
60	MP2B						Yes	** NA **			None
61	MP3B						Yes	** NA **			None
62	MP4B						Yes	** NA **			None
63	MP5B						Yes	** NA **			None
64	M72						Yes	** NA **			None
65	M73						Yes	** NA **			None
66	M74						Yes	** NA **			None
67	M75						Yes	** NA **			None
68	M76						Yes	** NA **			None
69	M77						Yes	** NA **			None
70	M78						Yes	** NA **			None
71	M79						Yes	** NA **			None
72	M80						Yes	** NA **			None
73	M81						Yes	** NA **			None
74	M80A						Yes	** NA **			None
75	M81A						Yes	** NA **			None
76	M82	OOOOOX					Yes	** NA **			None
77	M83	OOOOOX					Yes	** NA **			None
78	M84	OOOOOX					Yes	** NA **			None
79	M85	OOOOOX					Yes	** NA **			None
80	M86	OOOOOX					Yes	** NA **			None
81	M87	OOOOOX					Yes	** NA **			None
82	M88						Yes	** NA **			None
83	M95A						Yes	** NA **			None
84	M102						Yes	** NA **			None
85	M91	BenPIN	BenPIN				Yes	** NA **			None
86	M92	BenPIN	BenPIN				Yes	** NA **			None
87	M93	BenPIN	BenPIN				Yes	** NA **			None
88	M94A						Yes	** NA **			None
89	M95B						Yes	** NA **			None
90	M96A						Yes	** NA **			None



**Member Advanced Data (Continued)**

	Label	I Release	J Release	I Offset[in]	J Offset[in]	T/C Only	Physical	Defl Rat...	Analysis ...	Inactive	Seismic...
91	M91A	OOOOOX					Yes	** NA **			None
92	M92A	OOOOOX					Yes	** NA **			None
93	M93A	OOOOOX					Yes	** NA **			None
94	M94B	OOOOOX					Yes	** NA **			None
95	M95C	OOOOOX					Yes	** NA **			None
96	M96B	OOOOOX					Yes	** NA **			None

**Member Point Loads (BLC 1 : Antenna D)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
1	MP4A	Y	-43.55	3
2	MP4A	My	-.036	3
3	MP4A	Mz	0	3
4	MP4A	Y	-43.55	5
5	MP4A	My	-.036	5
6	MP4A	Mz	0	5
7	MP4B	Y	-43.55	3
8	MP4B	My	.018	3
9	MP4B	Mz	-.031	3
10	MP4B	Y	-43.55	5
11	MP4B	My	.018	5
12	MP4B	Mz	-.031	5
13	MP4C	Y	-43.55	3
14	MP4C	My	.018	3
15	MP4C	Mz	.031	3
16	MP4C	Y	-43.55	5
17	MP4C	My	.018	5
18	MP4C	Mz	.031	5
19	MP2A	Y	-10.5	2
20	MP2A	My	-.004	2
21	MP2A	Mz	.008	2
22	MP2A	Y	-10.5	6
23	MP2A	My	-.004	6
24	MP2A	Mz	.008	6
25	MP2B	Y	-10.5	2
26	MP2B	My	-.004	2
27	MP2B	Mz	-.008	2
28	MP2B	Y	-10.5	6
29	MP2B	My	-.004	6
30	MP2B	Mz	-.008	6
31	MP2C	Y	-10.5	2
32	MP2C	My	.009	2
33	MP2C	Mz	.002	2
34	MP2C	Y	-10.5	6
35	MP2C	My	.009	6
36	MP2C	Mz	.002	6
37	MP5A	Y	-10.5	2
38	MP5A	My	-.004	2
39	MP5A	Mz	.008	2
40	MP5A	Y	-10.5	6
41	MP5A	My	-.004	6
42	MP5A	Mz	.008	6
43	MP5B	Y	-10.5	2
44	MP5B	My	-.004	2
45	MP5B	Mz	-.008	2
46	MP5B	Y	-10.5	6
47	MP5B	My	-.004	6
48	MP5B	Mz	-.008	6





**Member Point Loads (BLC 1 : Antenna D) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	Y	-10.5	2
50	MP5C	My	.009	2
51	MP5C	Mz	.002	2
52	MP5C	Y	-10.5	6
53	MP5C	My	.009	6
54	MP5C	Mz	.002	6
55	MP3A	Y	-23	2
56	MP3A	My	-.011	2
57	MP3A	Mz	.015	2
58	MP3A	Y	-23	6
59	MP3A	My	-.011	6
60	MP3A	Mz	.015	6
61	MP3B	Y	-23	2
62	MP3B	My	-.008	2
63	MP3B	Mz	-.018	2
64	MP3B	Y	-23	6
65	MP3B	My	-.008	6
66	MP3B	Mz	-.018	6
67	MP3C	Y	-23	2
68	MP3C	My	.019	2
69	MP3C	Mz	.002	2
70	MP3C	Y	-23	6
71	MP3C	My	.019	6
72	MP3C	Mz	.002	6
73	MP3A	Y	-23	2
74	MP3A	My	-.011	2
75	MP3A	Mz	-.015	2
76	MP3A	Y	-23	6
77	MP3A	My	-.011	6
78	MP3A	Mz	-.015	6
79	MP3B	Y	-23	2
80	MP3B	My	.019	2
81	MP3B	Mz	-.002	2
82	MP3B	Y	-23	6
83	MP3B	My	.019	6
84	MP3B	Mz	-.002	6
85	MP3C	Y	-23	2
86	MP3C	My	-.008	2
87	MP3C	Mz	.018	2
88	MP3C	Y	-23	6
89	MP3C	My	-.008	6
90	MP3C	Mz	.018	6
91	MP6A	Y	-32	2
92	MP6A	My	0	2
93	MP6A	Mz	0	2
94	MP3A	Y	-84.4	4
95	MP3A	My	.042	4
96	MP3A	Mz	0	4
97	MP3B	Y	-84.4	4
98	MP3B	My	-.021	4
99	MP3B	Mz	.037	4
100	MP3C	Y	-84.4	4
101	MP3C	My	-.021	4
102	MP3C	Mz	-.037	4
103	MP2A	Y	-70.3	4
104	MP2A	My	.035	4
105	MP2A	Mz	0	4
106	MP2B	Y	-70.3	4
107	MP2B	My	-.018	4



**Member Point Loads (BLC 1 : Antenna D) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mz	.03	4
109	MP2C	Y	-70.3	4
110	MP2C	My	-.018	4
111	MP2C	Mz	-.03	4
112	MP1A	Y	-10	0
113	MP1A	My	0	0
114	MP1A	Mz	0	0

**Member Point Loads (BLC 2 : Antenna Di)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	Y	-34.467	3
2	MP4A	My	-.029	3
3	MP4A	Mz	0	3
4	MP4A	Y	-34.467	5
5	MP4A	My	-.029	5
6	MP4A	Mz	0	5
7	MP4B	Y	-34.467	3
8	MP4B	My	.014	3
9	MP4B	Mz	-.025	3
10	MP4B	Y	-34.467	5
11	MP4B	My	.014	5
12	MP4B	Mz	-.025	5
13	MP4C	Y	-34.467	3
14	MP4C	My	.014	3
15	MP4C	Mz	.025	3
16	MP4C	Y	-34.467	5
17	MP4C	My	.014	5
18	MP4C	Mz	.025	5
19	MP2A	Y	-57.337	2
20	MP2A	My	-.02	2
21	MP2A	Mz	.043	2
22	MP2A	Y	-57.337	6
23	MP2A	My	-.02	6
24	MP2A	Mz	.043	6
25	MP2B	Y	-57.337	2
26	MP2B	My	-.02	2
27	MP2B	Mz	-.043	2
28	MP2B	Y	-57.337	6
29	MP2B	My	-.02	6
30	MP2B	Mz	-.043	6
31	MP2C	Y	-57.337	2
32	MP2C	My	.047	2
33	MP2C	Mz	.008	2
34	MP2C	Y	-57.337	6
35	MP2C	My	.047	6
36	MP2C	Mz	.008	6
37	MP5A	Y	-57.337	2
38	MP5A	My	-.02	2
39	MP5A	Mz	.043	2
40	MP5A	Y	-57.337	6
41	MP5A	My	-.02	6
42	MP5A	Mz	.043	6
43	MP5B	Y	-57.337	2
44	MP5B	My	-.02	2
45	MP5B	Mz	-.043	2
46	MP5B	Y	-57.337	6
47	MP5B	My	-.02	6
48	MP5B	Mz	-.043	6

**Member Point Loads (BLC 2 : Antenna Di) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	Y	-57.337	2
50	MP5C	My	.047	2
51	MP5C	Mz	.008	2
52	MP5C	Y	-57.337	6
53	MP5C	My	.047	6
54	MP5C	Mz	.008	6
55	MP3A	Y	-80.049	2
56	MP3A	My	-.04	2
57	MP3A	Mz	.053	2
58	MP3A	Y	-80.049	6
59	MP3A	My	-.04	6
60	MP3A	Mz	.053	6
61	MP3B	Y	-80.049	2
62	MP3B	My	-.026	2
63	MP3B	Mz	-.061	2
64	MP3B	Y	-80.049	6
65	MP3B	My	-.026	6
66	MP3B	Mz	-.061	6
67	MP3C	Y	-80.049	2
68	MP3C	My	.066	2
69	MP3C	Mz	.008	2
70	MP3C	Y	-80.049	6
71	MP3C	My	.066	6
72	MP3C	Mz	.008	6
73	MP3A	Y	-80.049	2
74	MP3A	My	-.04	2
75	MP3A	Mz	-.053	2
76	MP3A	Y	-80.049	6
77	MP3A	My	-.04	6
78	MP3A	Mz	-.053	6
79	MP3B	Y	-80.049	2
80	MP3B	My	.066	2
81	MP3B	Mz	-.008	2
82	MP3B	Y	-80.049	6
83	MP3B	My	.066	6
84	MP3B	Mz	-.008	6
85	MP3C	Y	-80.049	2
86	MP3C	My	-.026	2
87	MP3C	Mz	.061	2
88	MP3C	Y	-80.049	6
89	MP3C	My	-.026	6
90	MP3C	Mz	.061	6
91	MP6A	Y	-73.527	2
92	MP6A	My	0	2
93	MP6A	Mz	0	2
94	MP3A	Y	-43.434	4
95	MP3A	My	.022	4
96	MP3A	Mz	0	4
97	MP3B	Y	-43.434	4
98	MP3B	My	-.011	4
99	MP3B	Mz	.019	4
100	MP3C	Y	-43.434	4
101	MP3C	My	-.011	4
102	MP3C	Mz	-.019	4
103	MP2A	Y	-39.052	4
104	MP2A	My	.02	4
105	MP2A	Mz	0	4
106	MP2B	Y	-39.052	4
107	MP2B	My	-.01	4

**Member Point Loads (BLC 2 : Antenna Di) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mz	.017	4
109	MP2C	Y	-39.052	4
110	MP2C	My	-.01	4
111	MP2C	Mz	-.017	4
112	MP1A	Y	-10.825	0
113	MP1A	My	0	0
114	MP1A	Mz	0	0

**Member Point Loads (BLC 3 : Antenna Wo (0 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	0	3
2	MP4A	Z	-92.202	3
3	MP4A	Mx	0	3
4	MP4A	X	0	5
5	MP4A	Z	-92.202	5
6	MP4A	Mx	0	5
7	MP4B	X	0	3
8	MP4B	Z	-50.123	3
9	MP4B	Mx	.036	3
10	MP4B	X	0	5
11	MP4B	Z	-50.123	5
12	MP4B	Mx	.036	5
13	MP4C	X	0	3
14	MP4C	Z	-50.123	3
15	MP4C	Mx	-.036	3
16	MP4C	X	0	5
17	MP4C	Z	-50.123	5
18	MP4C	Mx	-.036	5
19	MP2A	X	0	2
20	MP2A	Z	-123.935	2
21	MP2A	Mx	-.094	2
22	MP2A	X	0	6
23	MP2A	Z	-123.935	6
24	MP2A	Mx	-.094	6
25	MP2B	X	0	2
26	MP2B	Z	-123.935	2
27	MP2B	Mx	.094	2
28	MP2B	X	0	6
29	MP2B	Z	-123.935	6
30	MP2B	Mx	.094	6
31	MP2C	X	0	2
32	MP2C	Z	-137.776	2
33	MP2C	Mx	-.02	2
34	MP2C	X	0	6
35	MP2C	Z	-137.776	6
36	MP2C	Mx	-.02	6
37	MP5A	X	0	2
38	MP5A	Z	-123.935	2
39	MP5A	Mx	-.094	2
40	MP5A	X	0	6
41	MP5A	Z	-123.935	6
42	MP5A	Mx	-.094	6
43	MP5B	X	0	2
44	MP5B	Z	-123.935	2
45	MP5B	Mx	.094	2
46	MP5B	X	0	6
47	MP5B	Z	-123.935	6
48	MP5B	Mx	.094	6

**Member Point Loads (BLC 3 : Antenna Wo (0 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	0	2
50	MP5C	Z	-137.776	2
51	MP5C	Mx	-.02	2
52	MP5C	X	0	6
53	MP5C	Z	-137.776	6
54	MP5C	Mx	-.02	6
55	MP3A	X	0	2
56	MP3A	Z	-194.41	2
57	MP3A	Mx	-.13	2
58	MP3A	X	0	6
59	MP3A	Z	-194.41	6
60	MP3A	Mx	-.13	6
61	MP3B	X	0	2
62	MP3B	Z	-157.005	2
63	MP3B	Mx	.12	2
64	MP3B	X	0	6
65	MP3B	Z	-157.005	6
66	MP3B	Mx	.12	6
67	MP3C	X	0	2
68	MP3C	Z	-157.005	2
69	MP3C	Mx	-.016	2
70	MP3C	X	0	6
71	MP3C	Z	-157.005	6
72	MP3C	Mx	-.016	6
73	MP3A	X	0	2
74	MP3A	Z	-194.41	2
75	MP3A	Mx	.13	2
76	MP3A	X	0	6
77	MP3A	Z	-194.41	6
78	MP3A	Mx	.13	6
79	MP3B	X	0	2
80	MP3B	Z	-157.005	2
81	MP3B	Mx	.016	2
82	MP3B	X	0	6
83	MP3B	Z	-157.005	6
84	MP3B	Mx	.016	6
85	MP3C	X	0	2
86	MP3C	Z	-157.005	2
87	MP3C	Mx	-.12	2
88	MP3C	X	0	6
89	MP3C	Z	-157.005	6
90	MP3C	Mx	-.12	6
91	MP6A	X	0	2
92	MP6A	Z	-99.944	2
93	MP6A	Mx	0	2
94	MP3A	X	0	4
95	MP3A	Z	-73.369	4
96	MP3A	Mx	0	4
97	MP3B	X	0	4
98	MP3B	Z	-55.125	4
99	MP3B	Mx	-.024	4
100	MP3C	X	0	4
101	MP3C	Z	-55.125	4
102	MP3C	Mx	.024	4
103	MP2A	X	0	4
104	MP2A	Z	-73.369	4
105	MP2A	Mx	0	4
106	MP2B	X	0	4
107	MP2B	Z	-48.136	4



**Member Point Loads (BLC 3 : Antenna Wo (0 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	-.021	4
109	MP2C	X	0	4
110	MP2C	Z	-48.136	4
111	MP2C	Mx	.021	4
112	MP1A	X	0	0
113	MP1A	Z	-24.014	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 4 : Antenna Wo (30 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	39.088	3
2	MP4A	Z	-67.702	3
3	MP4A	Mx	-.033	3
4	MP4A	X	39.088	5
5	MP4A	Z	-67.702	5
6	MP4A	Mx	-.033	5
7	MP4B	X	18.049	3
8	MP4B	Z	-31.261	3
9	MP4B	Mx	.03	3
10	MP4B	X	18.049	5
11	MP4B	Z	-31.261	5
12	MP4B	Mx	.03	5
13	MP4C	X	39.088	3
14	MP4C	Z	-67.702	3
15	MP4C	Mx	-.033	3
16	MP4C	X	39.088	5
17	MP4C	Z	-67.702	5
18	MP4C	Mx	-.033	5
19	MP2A	X	60.472	2
20	MP2A	Z	-104.741	2
21	MP2A	Mx	-.1	2
22	MP2A	X	60.472	6
23	MP2A	Z	-104.741	6
24	MP2A	Mx	-.1	6
25	MP2B	X	66.274	2
26	MP2B	Z	-114.791	2
27	MP2B	Mx	.063	2
28	MP2B	X	66.274	6
29	MP2B	Z	-114.791	6
30	MP2B	Mx	.063	6
31	MP2C	X	68.129	2
32	MP2C	Z	-118.002	2
33	MP2C	Mx	.039	2
34	MP2C	X	68.129	6
35	MP2C	Z	-118.002	6
36	MP2C	Mx	.039	6
37	MP5A	X	60.472	2
38	MP5A	Z	-104.741	2
39	MP5A	Mx	-.1	2
40	MP5A	X	60.472	6
41	MP5A	Z	-104.741	6
42	MP5A	Mx	-.1	6
43	MP5B	X	66.274	2
44	MP5B	Z	-114.791	2
45	MP5B	Mx	.063	2
46	MP5B	X	66.274	6
47	MP5B	Z	-114.791	6
48	MP5B	Mx	.063	6



**Member Point Loads (BLC 4 : Antenna Wo (30 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	68.129	2
50	MP5C	Z	-118.002	2
51	MP5C	Mx	.039	2
52	MP5C	X	68.129	6
53	MP5C	Z	-118.002	6
54	MP5C	Mx	.039	6
55	MP3A	X	90.971	2
56	MP3A	Z	-157.566	2
57	MP3A	Mx	-.151	2
58	MP3A	X	90.971	6
59	MP3A	Z	-157.566	6
60	MP3A	Mx	-.151	6
61	MP3B	X	72.268	2
62	MP3B	Z	-125.172	2
63	MP3B	Mx	.072	2
64	MP3B	X	72.268	6
65	MP3B	Z	-125.172	6
66	MP3B	Mx	.072	6
67	MP3C	X	90.971	2
68	MP3C	Z	-157.566	2
69	MP3C	Mx	.06	2
70	MP3C	X	90.971	6
71	MP3C	Z	-157.566	6
72	MP3C	Mx	.06	6
73	MP3A	X	90.971	2
74	MP3A	Z	-157.566	2
75	MP3A	Mx	.06	2
76	MP3A	X	90.971	6
77	MP3A	Z	-157.566	6
78	MP3A	Mx	.06	6
79	MP3B	X	72.268	2
80	MP3B	Z	-125.172	2
81	MP3B	Mx	.072	2
82	MP3B	X	72.268	6
83	MP3B	Z	-125.172	6
84	MP3B	Mx	.072	6
85	MP3C	X	90.971	2
86	MP3C	Z	-157.566	2
87	MP3C	Mx	-.151	2
88	MP3C	X	90.971	6
89	MP3C	Z	-157.566	6
90	MP3C	Mx	-.151	6
91	MP6A	X	59.6	2
92	MP6A	Z	-103.23	2
93	MP6A	Mx	0	2
94	MP3A	X	33.644	4
95	MP3A	Z	-58.273	4
96	MP3A	Mx	.017	4
97	MP3B	X	24.522	4
98	MP3B	Z	-42.473	4
99	MP3B	Mx	-.025	4
100	MP3C	X	33.644	4
101	MP3C	Z	-58.273	4
102	MP3C	Mx	.017	4
103	MP2A	X	32.479	4
104	MP2A	Z	-56.256	4
105	MP2A	Mx	.016	4
106	MP2B	X	19.863	4
107	MP2B	Z	-34.403	4





**Member Point Loads (BLC 5 : Antenna Wo (60 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	110.885	2
50	MP5C	Z	-64.019	2
51	MP5C	Mx	.082	2
52	MP5C	X	110.885	6
53	MP5C	Z	-64.019	6
54	MP5C	Mx	.082	6
55	MP3A	X	135.97	2
56	MP3A	Z	-78.502	2
57	MP3A	Mx	-.12	2
58	MP3A	X	135.97	6
59	MP3A	Z	-78.502	6
60	MP3A	Mx	-.12	6
61	MP3B	X	135.97	2
62	MP3B	Z	-78.502	2
63	MP3B	Mx	.016	2
64	MP3B	X	135.97	6
65	MP3B	Z	-78.502	6
66	MP3B	Mx	.016	6
67	MP3C	X	168.364	2
68	MP3C	Z	-97.205	2
69	MP3C	Mx	.13	2
70	MP3C	X	168.364	6
71	MP3C	Z	-97.205	6
72	MP3C	Mx	.13	6
73	MP3A	X	135.97	2
74	MP3A	Z	-78.502	2
75	MP3A	Mx	-.016	2
76	MP3A	X	135.97	6
77	MP3A	Z	-78.502	6
78	MP3A	Mx	-.016	6
79	MP3B	X	135.97	2
80	MP3B	Z	-78.502	2
81	MP3B	Mx	.12	2
82	MP3B	X	135.97	6
83	MP3B	Z	-78.502	6
84	MP3B	Mx	.12	6
85	MP3C	X	168.364	2
86	MP3C	Z	-97.205	2
87	MP3C	Mx	-.13	2
88	MP3C	X	168.364	6
89	MP3C	Z	-97.205	6
90	MP3C	Mx	-.13	6
91	MP6A	X	123.686	2
92	MP6A	Z	-71.41	2
93	MP6A	Mx	0	2
94	MP3A	X	47.74	4
95	MP3A	Z	-27.563	4
96	MP3A	Mx	.024	4
97	MP3B	X	47.74	4
98	MP3B	Z	-27.563	4
99	MP3B	Mx	-.024	4
100	MP3C	X	63.54	4
101	MP3C	Z	-36.685	4
102	MP3C	Mx	0	4
103	MP2A	X	41.687	4
104	MP2A	Z	-24.068	4
105	MP2A	Mx	.021	4
106	MP2B	X	41.687	4
107	MP2B	Z	-24.068	4



**Member Point Loads (BLC 5 : Antenna Wo (60 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	-.021	4
109	MP2C	X	63.54	4
110	MP2C	Z	-36.685	4
111	MP2C	Mx	0	4
112	MP1A	X	32.389	0
113	MP1A	Z	-18.7	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 6 : Antenna Wo (90 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	36.097	3
2	MP4A	Z	0	3
3	MP4A	Mx	-.03	3
4	MP4A	X	36.097	5
5	MP4A	Z	0	5
6	MP4A	Mx	-.03	5
7	MP4B	X	78.176	3
8	MP4B	Z	0	3
9	MP4B	Mx	.033	3
10	MP4B	X	78.176	5
11	MP4B	Z	0	5
12	MP4B	Mx	.033	5
13	MP4C	X	78.176	3
14	MP4C	Z	0	3
15	MP4C	Mx	.033	3
16	MP4C	X	78.176	5
17	MP4C	Z	0	5
18	MP4C	Mx	.033	5
19	MP2A	X	135.179	2
20	MP2A	Z	0	2
21	MP2A	Mx	-.048	2
22	MP2A	X	135.179	6
23	MP2A	Z	0	6
24	MP2A	Mx	-.048	6
25	MP2B	X	135.179	2
26	MP2B	Z	0	2
27	MP2B	Mx	-.048	2
28	MP2B	X	135.179	6
29	MP2B	Z	0	6
30	MP2B	Mx	-.048	6
31	MP2C	X	121.339	2
32	MP2C	Z	0	2
33	MP2C	Mx	.1	2
34	MP2C	X	121.339	6
35	MP2C	Z	0	6
36	MP2C	Mx	.1	6
37	MP5A	X	135.179	2
38	MP5A	Z	0	2
39	MP5A	Mx	-.048	2
40	MP5A	X	135.179	6
41	MP5A	Z	0	6
42	MP5A	Mx	-.048	6
43	MP5B	X	135.179	2
44	MP5B	Z	0	2
45	MP5B	Mx	-.048	2
46	MP5B	X	135.179	6
47	MP5B	Z	0	6
48	MP5B	Mx	-.048	6







**Member Point Loads (BLC 6 : Antenna Wo (90 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	-.016	4
109	MP2C	X	64.958	4
110	MP2C	Z	0	4
111	MP2C	Mx	-.016	4
112	MP1A	X	38.762	0
113	MP1A	Z	0	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 7 : Antenna Wo (120 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	43.408	3
2	MP4A	Z	25.062	3
3	MP4A	Mx	-.036	3
4	MP4A	X	43.408	5
5	MP4A	Z	25.062	5
6	MP4A	Mx	-.036	5
7	MP4B	X	79.85	3
8	MP4B	Z	46.101	3
9	MP4B	Mx	0	3
10	MP4B	X	79.85	5
11	MP4B	Z	46.101	5
12	MP4B	Mx	0	5
13	MP4C	X	43.408	3
14	MP4C	Z	25.062	3
15	MP4C	Mx	.036	3
16	MP4C	X	43.408	5
17	MP4C	Z	25.062	5
18	MP4C	Mx	.036	5
19	MP2A	X	119.659	2
20	MP2A	Z	69.085	2
21	MP2A	Mx	.01	2
22	MP2A	X	119.659	6
23	MP2A	Z	69.085	6
24	MP2A	Mx	.01	6
25	MP2B	X	109.609	2
26	MP2B	Z	63.283	2
27	MP2B	Mx	-.086	2
28	MP2B	X	109.609	6
29	MP2B	Z	63.283	6
30	MP2B	Mx	-.086	6
31	MP2C	X	106.398	2
32	MP2C	Z	61.429	2
33	MP2C	Mx	.096	2
34	MP2C	X	106.398	6
35	MP2C	Z	61.429	6
36	MP2C	Mx	.096	6
37	MP5A	X	119.659	2
38	MP5A	Z	69.085	2
39	MP5A	Mx	.01	2
40	MP5A	X	119.659	6
41	MP5A	Z	69.085	6
42	MP5A	Mx	.01	6
43	MP5B	X	109.609	2
44	MP5B	Z	63.283	2
45	MP5B	Mx	-.086	2
46	MP5B	X	109.609	6
47	MP5B	Z	63.283	6
48	MP5B	Mx	-.086	6



**Member Point Loads (BLC 7 : Antenna Wo (120 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	0	4
109	MP2C	X	41.687	4
110	MP2C	Z	24.068	4
111	MP2C	Mx	-.021	4
112	MP1A	X	28.363	0
113	MP1A	Z	16.375	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 8 : Antenna Wo (150 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	39.088	3
2	MP4A	Z	67.702	3
3	MP4A	Mx	-.033	3
4	MP4A	X	39.088	5
5	MP4A	Z	67.702	5
6	MP4A	Mx	-.033	5
7	MP4B	X	39.088	3
8	MP4B	Z	67.702	3
9	MP4B	Mx	-.033	3
10	MP4B	X	39.088	5
11	MP4B	Z	67.702	5
12	MP4B	Mx	-.033	5
13	MP4C	X	18.049	3
14	MP4C	Z	31.261	3
15	MP4C	Mx	.03	3
16	MP4C	X	18.049	5
17	MP4C	Z	31.261	5
18	MP4C	Mx	.03	5
19	MP2A	X	66.274	2
20	MP2A	Z	114.791	2
21	MP2A	Mx	.063	2
22	MP2A	X	66.274	6
23	MP2A	Z	114.791	6
24	MP2A	Mx	.063	6
25	MP2B	X	60.472	2
26	MP2B	Z	104.741	2
27	MP2B	Mx	-.1	2
28	MP2B	X	60.472	6
29	MP2B	Z	104.741	6
30	MP2B	Mx	-.1	6
31	MP2C	X	65.538	2
32	MP2C	Z	113.515	2
33	MP2C	Mx	.07	2
34	MP2C	X	65.538	6
35	MP2C	Z	113.515	6
36	MP2C	Mx	.07	6
37	MP5A	X	66.274	2
38	MP5A	Z	114.791	2
39	MP5A	Mx	.063	2
40	MP5A	X	66.274	6
41	MP5A	Z	114.791	6
42	MP5A	Mx	.063	6
43	MP5B	X	60.472	2
44	MP5B	Z	104.741	2
45	MP5B	Mx	-.1	2
46	MP5B	X	60.472	6
47	MP5B	Z	104.741	6
48	MP5B	Mx	-.1	6

**Member Point Loads (BLC 8 : Antenna Wo (150 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	65.538	2
50	MP5C	Z	113.515	2
51	MP5C	Mx	.07	2
52	MP5C	X	65.538	6
53	MP5C	Z	113.515	6
54	MP5C	Mx	.07	6
55	MP3A	X	90.971	2
56	MP3A	Z	157.566	2
57	MP3A	Mx	.06	2
58	MP3A	X	90.971	6
59	MP3A	Z	157.566	6
60	MP3A	Mx	.06	6
61	MP3B	X	90.971	2
62	MP3B	Z	157.566	2
63	MP3B	Mx	-.151	2
64	MP3B	X	90.971	6
65	MP3B	Z	157.566	6
66	MP3B	Mx	-.151	6
67	MP3C	X	72.268	2
68	MP3C	Z	125.172	2
69	MP3C	Mx	.072	2
70	MP3C	X	72.268	6
71	MP3C	Z	125.172	6
72	MP3C	Mx	.072	6
73	MP3A	X	90.971	2
74	MP3A	Z	157.566	2
75	MP3A	Mx	-.151	2
76	MP3A	X	90.971	6
77	MP3A	Z	157.566	6
78	MP3A	Mx	-.151	6
79	MP3B	X	90.971	2
80	MP3B	Z	157.566	2
81	MP3B	Mx	.06	2
82	MP3B	X	90.971	6
83	MP3B	Z	157.566	6
84	MP3B	Mx	.06	6
85	MP3C	X	72.268	2
86	MP3C	Z	125.172	2
87	MP3C	Mx	.072	2
88	MP3C	X	72.268	6
89	MP3C	Z	125.172	6
90	MP3C	Mx	.072	6
91	MP6A	X	52.154	2
92	MP6A	Z	90.334	2
93	MP6A	Mx	0	2
94	MP3A	X	33.644	4
95	MP3A	Z	58.273	4
96	MP3A	Mx	.017	4
97	MP3B	X	33.644	4
98	MP3B	Z	58.273	4
99	MP3B	Mx	.017	4
100	MP3C	X	24.522	4
101	MP3C	Z	42.473	4
102	MP3C	Mx	-.025	4
103	MP2A	X	32.479	4
104	MP2A	Z	56.256	4
105	MP2A	Mx	.016	4
106	MP2B	X	32.479	4
107	MP2B	Z	56.256	4



**Member Point Loads (BLC 8 : Antenna Wo (150 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	.016	4
109	MP2C	X	19.863	4
110	MP2C	Z	34.403	4
111	MP2C	Mx	-.02	4
112	MP1A	X	12.688	0
113	MP1A	Z	21.977	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 9 : Antenna Wo (180 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	0	3
2	MP4A	Z	92.202	3
3	MP4A	Mx	0	3
4	MP4A	X	0	5
5	MP4A	Z	92.202	5
6	MP4A	Mx	0	5
7	MP4B	X	0	3
8	MP4B	Z	50.123	3
9	MP4B	Mx	-.036	3
10	MP4B	X	0	5
11	MP4B	Z	50.123	5
12	MP4B	Mx	-.036	5
13	MP4C	X	0	3
14	MP4C	Z	50.123	3
15	MP4C	Mx	.036	3
16	MP4C	X	0	5
17	MP4C	Z	50.123	5
18	MP4C	Mx	.036	5
19	MP2A	X	0	2
20	MP2A	Z	123.935	2
21	MP2A	Mx	.094	2
22	MP2A	X	0	6
23	MP2A	Z	123.935	6
24	MP2A	Mx	.094	6
25	MP2B	X	0	2
26	MP2B	Z	123.935	2
27	MP2B	Mx	-.094	2
28	MP2B	X	0	6
29	MP2B	Z	123.935	6
30	MP2B	Mx	-.094	6
31	MP2C	X	0	2
32	MP2C	Z	137.776	2
33	MP2C	Mx	.02	2
34	MP2C	X	0	6
35	MP2C	Z	137.776	6
36	MP2C	Mx	.02	6
37	MP5A	X	0	2
38	MP5A	Z	123.935	2
39	MP5A	Mx	.094	2
40	MP5A	X	0	6
41	MP5A	Z	123.935	6
42	MP5A	Mx	.094	6
43	MP5B	X	0	2
44	MP5B	Z	123.935	2
45	MP5B	Mx	-.094	2
46	MP5B	X	0	6
47	MP5B	Z	123.935	6
48	MP5B	Mx	-.094	6



**Member Point Loads (BLC 9 : Antenna Wo (180 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	0	2
50	MP5C	Z	137.776	2
51	MP5C	Mx	.02	2
52	MP5C	X	0	6
53	MP5C	Z	137.776	6
54	MP5C	Mx	.02	6
55	MP3A	X	0	2
56	MP3A	Z	194.41	2
57	MP3A	Mx	.13	2
58	MP3A	X	0	6
59	MP3A	Z	194.41	6
60	MP3A	Mx	.13	6
61	MP3B	X	0	2
62	MP3B	Z	157.005	2
63	MP3B	Mx	-.12	2
64	MP3B	X	0	6
65	MP3B	Z	157.005	6
66	MP3B	Mx	-.12	6
67	MP3C	X	0	2
68	MP3C	Z	157.005	2
69	MP3C	Mx	.016	2
70	MP3C	X	0	6
71	MP3C	Z	157.005	6
72	MP3C	Mx	.016	6
73	MP3A	X	0	2
74	MP3A	Z	194.41	2
75	MP3A	Mx	-.13	2
76	MP3A	X	0	6
77	MP3A	Z	194.41	6
78	MP3A	Mx	-.13	6
79	MP3B	X	0	2
80	MP3B	Z	157.005	2
81	MP3B	Mx	-.016	2
82	MP3B	X	0	6
83	MP3B	Z	157.005	6
84	MP3B	Mx	-.016	6
85	MP3C	X	0	2
86	MP3C	Z	157.005	2
87	MP3C	Mx	.12	2
88	MP3C	X	0	6
89	MP3C	Z	157.005	6
90	MP3C	Mx	.12	6
91	MP6A	X	0	2
92	MP6A	Z	99.944	2
93	MP6A	Mx	0	2
94	MP3A	X	0	4
95	MP3A	Z	73.369	4
96	MP3A	Mx	0	4
97	MP3B	X	0	4
98	MP3B	Z	55.125	4
99	MP3B	Mx	.024	4
100	MP3C	X	0	4
101	MP3C	Z	55.125	4
102	MP3C	Mx	-.024	4
103	MP2A	X	0	4
104	MP2A	Z	73.369	4
105	MP2A	Mx	0	4
106	MP2B	X	0	4
107	MP2B	Z	48.136	4



**Member Point Loads (BLC 9 : Antenna Wo (180 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
108	MP2B	Mx	.021	4
109	MP2C	X	0	4
110	MP2C	Z	48.136	4
111	MP2C	Mx	-.021	4
112	MP1A	X	0	0
113	MP1A	Z	24.014	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 10 : Antenna Wo (210 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
1	MP4A	X	-39.088	3
2	MP4A	Z	67.702	3
3	MP4A	Mx	.033	3
4	MP4A	X	-39.088	5
5	MP4A	Z	67.702	5
6	MP4A	Mx	.033	5
7	MP4B	X	-18.049	3
8	MP4B	Z	31.261	3
9	MP4B	Mx	-.03	3
10	MP4B	X	-18.049	5
11	MP4B	Z	31.261	5
12	MP4B	Mx	-.03	5
13	MP4C	X	-39.088	3
14	MP4C	Z	67.702	3
15	MP4C	Mx	.033	3
16	MP4C	X	-39.088	5
17	MP4C	Z	67.702	5
18	MP4C	Mx	.033	5
19	MP2A	X	-60.472	2
20	MP2A	Z	104.741	2
21	MP2A	Mx	.1	2
22	MP2A	X	-60.472	6
23	MP2A	Z	104.741	6
24	MP2A	Mx	.1	6
25	MP2B	X	-66.274	2
26	MP2B	Z	114.791	2
27	MP2B	Mx	-.063	2
28	MP2B	X	-66.274	6
29	MP2B	Z	114.791	6
30	MP2B	Mx	-.063	6
31	MP2C	X	-68.129	2
32	MP2C	Z	118.002	2
33	MP2C	Mx	-.039	2
34	MP2C	X	-68.129	6
35	MP2C	Z	118.002	6
36	MP2C	Mx	-.039	6
37	MP5A	X	-60.472	2
38	MP5A	Z	104.741	2
39	MP5A	Mx	.1	2
40	MP5A	X	-60.472	6
41	MP5A	Z	104.741	6
42	MP5A	Mx	.1	6
43	MP5B	X	-66.274	2
44	MP5B	Z	114.791	2
45	MP5B	Mx	-.063	2
46	MP5B	X	-66.274	6
47	MP5B	Z	114.791	6
48	MP5B	Mx	-.063	6

**Member Point Loads (BLC 10 : Antenna Wo (210 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	-68.129	2
50	MP5C	Z	118.002	2
51	MP5C	Mx	-.039	2
52	MP5C	X	-68.129	6
53	MP5C	Z	118.002	6
54	MP5C	Mx	-.039	6
55	MP3A	X	-90.971	2
56	MP3A	Z	157.566	2
57	MP3A	Mx	.151	2
58	MP3A	X	-90.971	6
59	MP3A	Z	157.566	6
60	MP3A	Mx	.151	6
61	MP3B	X	-72.268	2
62	MP3B	Z	125.172	2
63	MP3B	Mx	-.072	2
64	MP3B	X	-72.268	6
65	MP3B	Z	125.172	6
66	MP3B	Mx	-.072	6
67	MP3C	X	-90.971	2
68	MP3C	Z	157.566	2
69	MP3C	Mx	-.06	2
70	MP3C	X	-90.971	6
71	MP3C	Z	157.566	6
72	MP3C	Mx	-.06	6
73	MP3A	X	-90.971	2
74	MP3A	Z	157.566	2
75	MP3A	Mx	-.06	2
76	MP3A	X	-90.971	6
77	MP3A	Z	157.566	6
78	MP3A	Mx	-.06	6
79	MP3B	X	-72.268	2
80	MP3B	Z	125.172	2
81	MP3B	Mx	-.072	2
82	MP3B	X	-72.268	6
83	MP3B	Z	125.172	6
84	MP3B	Mx	-.072	6
85	MP3C	X	-90.971	2
86	MP3C	Z	157.566	2
87	MP3C	Mx	.151	2
88	MP3C	X	-90.971	6
89	MP3C	Z	157.566	6
90	MP3C	Mx	.151	6
91	MP6A	X	-59.6	2
92	MP6A	Z	103.23	2
93	MP6A	Mx	0	2
94	MP3A	X	-33.644	4
95	MP3A	Z	58.273	4
96	MP3A	Mx	-.017	4
97	MP3B	X	-24.522	4
98	MP3B	Z	42.473	4
99	MP3B	Mx	.025	4
100	MP3C	X	-33.644	4
101	MP3C	Z	58.273	4
102	MP3C	Mx	-.017	4
103	MP2A	X	-32.479	4
104	MP2A	Z	56.256	4
105	MP2A	Mx	-.016	4
106	MP2B	X	-19.863	4
107	MP2B	Z	34.403	4



**Member Point Loads (BLC 10 : Antenna Wo (210 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
108	MP2B	Mx	.02	4
109	MP2C	X	-32.479	4
110	MP2C	Z	56.256	4
111	MP2C	Mx	-.016	4
112	MP1A	X	-15.013	0
113	MP1A	Z	26.003	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 11 : Antenna Wo (240 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
1	MP4A	X	-43.408	3
2	MP4A	Z	25.062	3
3	MP4A	Mx	.036	3
4	MP4A	X	-43.408	5
5	MP4A	Z	25.062	5
6	MP4A	Mx	.036	5
7	MP4B	X	-43.408	3
8	MP4B	Z	25.062	3
9	MP4B	Mx	-.036	3
10	MP4B	X	-43.408	5
11	MP4B	Z	25.062	5
12	MP4B	Mx	-.036	5
13	MP4C	X	-79.85	3
14	MP4C	Z	46.101	3
15	MP4C	Mx	0	3
16	MP4C	X	-79.85	5
17	MP4C	Z	46.101	5
18	MP4C	Mx	0	5
19	MP2A	X	-109.609	2
20	MP2A	Z	63.283	2
21	MP2A	Mx	.086	2
22	MP2A	X	-109.609	6
23	MP2A	Z	63.283	6
24	MP2A	Mx	.086	6
25	MP2B	X	-119.659	2
26	MP2B	Z	69.085	2
27	MP2B	Mx	-.01	2
28	MP2B	X	-119.659	6
29	MP2B	Z	69.085	6
30	MP2B	Mx	-.01	6
31	MP2C	X	-110.885	2
32	MP2C	Z	64.019	2
33	MP2C	Mx	-.082	2
34	MP2C	X	-110.885	6
35	MP2C	Z	64.019	6
36	MP2C	Mx	-.082	6
37	MP5A	X	-109.609	2
38	MP5A	Z	63.283	2
39	MP5A	Mx	.086	2
40	MP5A	X	-109.609	6
41	MP5A	Z	63.283	6
42	MP5A	Mx	.086	6
43	MP5B	X	-119.659	2
44	MP5B	Z	69.085	2
45	MP5B	Mx	-.01	2
46	MP5B	X	-119.659	6
47	MP5B	Z	69.085	6
48	MP5B	Mx	-.01	6



**Member Point Loads (BLC 11 : Antenna Wo (240 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	-110.885	2
50	MP5C	Z	64.019	2
51	MP5C	Mx	-.082	2
52	MP5C	X	-110.885	6
53	MP5C	Z	64.019	6
54	MP5C	Mx	-.082	6
55	MP3A	X	-135.97	2
56	MP3A	Z	78.502	2
57	MP3A	Mx	.12	2
58	MP3A	X	-135.97	6
59	MP3A	Z	78.502	6
60	MP3A	Mx	.12	6
61	MP3B	X	-135.97	2
62	MP3B	Z	78.502	2
63	MP3B	Mx	-.016	2
64	MP3B	X	-135.97	6
65	MP3B	Z	78.502	6
66	MP3B	Mx	-.016	6
67	MP3C	X	-168.364	2
68	MP3C	Z	97.205	2
69	MP3C	Mx	-.13	2
70	MP3C	X	-168.364	6
71	MP3C	Z	97.205	6
72	MP3C	Mx	-.13	6
73	MP3A	X	-135.97	2
74	MP3A	Z	78.502	2
75	MP3A	Mx	.016	2
76	MP3A	X	-135.97	6
77	MP3A	Z	78.502	6
78	MP3A	Mx	.016	6
79	MP3B	X	-135.97	2
80	MP3B	Z	78.502	2
81	MP3B	Mx	-.12	2
82	MP3B	X	-135.97	6
83	MP3B	Z	78.502	6
84	MP3B	Mx	-.12	6
85	MP3C	X	-168.364	2
86	MP3C	Z	97.205	2
87	MP3C	Mx	.13	2
88	MP3C	X	-168.364	6
89	MP3C	Z	97.205	6
90	MP3C	Mx	.13	6
91	MP6A	X	-123.686	2
92	MP6A	Z	71.41	2
93	MP6A	Mx	0	2
94	MP3A	X	-47.74	4
95	MP3A	Z	27.563	4
96	MP3A	Mx	-.024	4
97	MP3B	X	-47.74	4
98	MP3B	Z	27.563	4
99	MP3B	Mx	.024	4
100	MP3C	X	-63.54	4
101	MP3C	Z	36.685	4
102	MP3C	Mx	0	4
103	MP2A	X	-41.687	4
104	MP2A	Z	24.068	4
105	MP2A	Mx	-.021	4
106	MP2B	X	-41.687	4
107	MP2B	Z	24.068	4

**Member Point Loads (BLC 11 : Antenna Wo (240 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	.021	4
109	MP2C	X	-63.54	4
110	MP2C	Z	36.685	4
111	MP2C	Mx	0	4
112	MP1A	X	-32.389	0
113	MP1A	Z	18.7	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 12 : Antenna Wo (270 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	-36.097	3
2	MP4A	Z	0	3
3	MP4A	Mx	.03	3
4	MP4A	X	-36.097	5
5	MP4A	Z	0	5
6	MP4A	Mx	.03	5
7	MP4B	X	-78.176	3
8	MP4B	Z	0	3
9	MP4B	Mx	-.033	3
10	MP4B	X	-78.176	5
11	MP4B	Z	0	5
12	MP4B	Mx	-.033	5
13	MP4C	X	-78.176	3
14	MP4C	Z	0	3
15	MP4C	Mx	-.033	3
16	MP4C	X	-78.176	5
17	MP4C	Z	0	5
18	MP4C	Mx	-.033	5
19	MP2A	X	-135.179	2
20	MP2A	Z	0	2
21	MP2A	Mx	.048	2
22	MP2A	X	-135.179	6
23	MP2A	Z	0	6
24	MP2A	Mx	.048	6
25	MP2B	X	-135.179	2
26	MP2B	Z	0	2
27	MP2B	Mx	.048	2
28	MP2B	X	-135.179	6
29	MP2B	Z	0	6
30	MP2B	Mx	.048	6
31	MP2C	X	-121.339	2
32	MP2C	Z	0	2
33	MP2C	Mx	-.1	2
34	MP2C	X	-121.339	6
35	MP2C	Z	0	6
36	MP2C	Mx	-.1	6
37	MP5A	X	-135.179	2
38	MP5A	Z	0	2
39	MP5A	Mx	.048	2
40	MP5A	X	-135.179	6
41	MP5A	Z	0	6
42	MP5A	Mx	.048	6
43	MP5B	X	-135.179	2
44	MP5B	Z	0	2
45	MP5B	Mx	.048	2
46	MP5B	X	-135.179	6
47	MP5B	Z	0	6
48	MP5B	Mx	.048	6



**Member Point Loads (BLC 12 : Antenna Wo (270 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	-121.339	2
50	MP5C	Z	0	2
51	MP5C	Mx	-.1	2
52	MP5C	X	-121.339	6
53	MP5C	Z	0	6
54	MP5C	Mx	-.1	6
55	MP3A	X	-144.536	2
56	MP3A	Z	0	2
57	MP3A	Mx	.072	2
58	MP3A	X	-144.536	6
59	MP3A	Z	0	6
60	MP3A	Mx	.072	6
61	MP3B	X	-181.942	2
62	MP3B	Z	0	2
63	MP3B	Mx	.06	2
64	MP3B	X	-181.942	6
65	MP3B	Z	0	6
66	MP3B	Mx	.06	6
67	MP3C	X	-181.942	2
68	MP3C	Z	0	2
69	MP3C	Mx	-.151	2
70	MP3C	X	-181.942	6
71	MP3C	Z	0	6
72	MP3C	Mx	-.151	6
73	MP3A	X	-144.536	2
74	MP3A	Z	0	2
75	MP3A	Mx	.072	2
76	MP3A	X	-144.536	6
77	MP3A	Z	0	6
78	MP3A	Mx	.072	6
79	MP3B	X	-181.942	2
80	MP3B	Z	0	2
81	MP3B	Mx	-.151	2
82	MP3B	X	-181.942	6
83	MP3B	Z	0	6
84	MP3B	Mx	-.151	6
85	MP3C	X	-181.942	2
86	MP3C	Z	0	2
87	MP3C	Mx	.06	2
88	MP3C	X	-181.942	6
89	MP3C	Z	0	6
90	MP3C	Mx	.06	6
91	MP6A	X	-147.185	2
92	MP6A	Z	0	2
93	MP6A	Mx	0	2
94	MP3A	X	-49.044	4
95	MP3A	Z	0	4
96	MP3A	Mx	-.025	4
97	MP3B	X	-67.288	4
98	MP3B	Z	0	4
99	MP3B	Mx	.017	4
100	MP3C	X	-67.288	4
101	MP3C	Z	0	4
102	MP3C	Mx	.017	4
103	MP2A	X	-39.725	4
104	MP2A	Z	0	4
105	MP2A	Mx	-.02	4
106	MP2B	X	-64.958	4
107	MP2B	Z	0	4

**Member Point Loads (BLC 12 : Antenna Wo (270 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	.016	4
109	MP2C	X	-64.958	4
110	MP2C	Z	0	4
111	MP2C	Mx	.016	4
112	MP1A	X	-38.762	0
113	MP1A	Z	0	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 13 : Antenna Wo (300 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	-43.408	3
2	MP4A	Z	-25.062	3
3	MP4A	Mx	.036	3
4	MP4A	X	-43.408	5
5	MP4A	Z	-25.062	5
6	MP4A	Mx	.036	5
7	MP4B	X	-79.85	3
8	MP4B	Z	-46.101	3
9	MP4B	Mx	0	3
10	MP4B	X	-79.85	5
11	MP4B	Z	-46.101	5
12	MP4B	Mx	0	5
13	MP4C	X	-43.408	3
14	MP4C	Z	-25.062	3
15	MP4C	Mx	-.036	3
16	MP4C	X	-43.408	5
17	MP4C	Z	-25.062	5
18	MP4C	Mx	-.036	5
19	MP2A	X	-119.659	2
20	MP2A	Z	-69.085	2
21	MP2A	Mx	-.01	2
22	MP2A	X	-119.659	6
23	MP2A	Z	-69.085	6
24	MP2A	Mx	-.01	6
25	MP2B	X	-109.609	2
26	MP2B	Z	-63.283	2
27	MP2B	Mx	.086	2
28	MP2B	X	-109.609	6
29	MP2B	Z	-63.283	6
30	MP2B	Mx	.086	6
31	MP2C	X	-106.398	2
32	MP2C	Z	-61.429	2
33	MP2C	Mx	-.096	2
34	MP2C	X	-106.398	6
35	MP2C	Z	-61.429	6
36	MP2C	Mx	-.096	6
37	MP5A	X	-119.659	2
38	MP5A	Z	-69.085	2
39	MP5A	Mx	-.01	2
40	MP5A	X	-119.659	6
41	MP5A	Z	-69.085	6
42	MP5A	Mx	-.01	6
43	MP5B	X	-109.609	2
44	MP5B	Z	-63.283	2
45	MP5B	Mx	.086	2
46	MP5B	X	-109.609	6
47	MP5B	Z	-63.283	6
48	MP5B	Mx	.086	6

**Member Point Loads (BLC 13 : Antenna Wo (300 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	-106.398	2
50	MP5C	Z	-61.429	2
51	MP5C	Mx	-.096	2
52	MP5C	X	-106.398	6
53	MP5C	Z	-61.429	6
54	MP5C	Mx	-.096	6
55	MP3A	X	-135.97	2
56	MP3A	Z	-78.502	2
57	MP3A	Mx	.016	2
58	MP3A	X	-135.97	6
59	MP3A	Z	-78.502	6
60	MP3A	Mx	.016	6
61	MP3B	X	-168.364	2
62	MP3B	Z	-97.205	2
63	MP3B	Mx	.13	2
64	MP3B	X	-168.364	6
65	MP3B	Z	-97.205	6
66	MP3B	Mx	.13	6
67	MP3C	X	-135.97	2
68	MP3C	Z	-78.502	2
69	MP3C	Mx	-.12	2
70	MP3C	X	-135.97	6
71	MP3C	Z	-78.502	6
72	MP3C	Mx	-.12	6
73	MP3A	X	-135.97	2
74	MP3A	Z	-78.502	2
75	MP3A	Mx	.12	2
76	MP3A	X	-135.97	6
77	MP3A	Z	-78.502	6
78	MP3A	Mx	.12	6
79	MP3B	X	-168.364	2
80	MP3B	Z	-97.205	2
81	MP3B	Mx	-.13	2
82	MP3B	X	-168.364	6
83	MP3B	Z	-97.205	6
84	MP3B	Mx	-.13	6
85	MP3C	X	-135.97	2
86	MP3C	Z	-78.502	2
87	MP3C	Mx	-.016	2
88	MP3C	X	-135.97	6
89	MP3C	Z	-78.502	6
90	MP3C	Mx	-.016	6
91	MP6A	X	-110.79	2
92	MP6A	Z	-63.965	2
93	MP6A	Mx	0	2
94	MP3A	X	-47.74	4
95	MP3A	Z	-27.563	4
96	MP3A	Mx	-.024	4
97	MP3B	X	-63.54	4
98	MP3B	Z	-36.685	4
99	MP3B	Mx	0	4
100	MP3C	X	-47.74	4
101	MP3C	Z	-27.563	4
102	MP3C	Mx	.024	4
103	MP2A	X	-41.687	4
104	MP2A	Z	-24.068	4
105	MP2A	Mx	-.021	4
106	MP2B	X	-63.54	4
107	MP2B	Z	-36.685	4



**Member Point Loads (BLC 13 : Antenna Wo (300 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	0	4
109	MP2C	X	-41.687	4
110	MP2C	Z	-24.068	4
111	MP2C	Mx	.021	4
112	MP1A	X	-28.363	0
113	MP1A	Z	-16.375	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 14 : Antenna Wo (330 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	-39.088	3
2	MP4A	Z	-67.702	3
3	MP4A	Mx	.033	3
4	MP4A	X	-39.088	5
5	MP4A	Z	-67.702	5
6	MP4A	Mx	.033	5
7	MP4B	X	-39.088	3
8	MP4B	Z	-67.702	3
9	MP4B	Mx	.033	3
10	MP4B	X	-39.088	5
11	MP4B	Z	-67.702	5
12	MP4B	Mx	.033	5
13	MP4C	X	-18.049	3
14	MP4C	Z	-31.261	3
15	MP4C	Mx	-.03	3
16	MP4C	X	-18.049	5
17	MP4C	Z	-31.261	5
18	MP4C	Mx	-.03	5
19	MP2A	X	-66.274	2
20	MP2A	Z	-114.791	2
21	MP2A	Mx	-.063	2
22	MP2A	X	-66.274	6
23	MP2A	Z	-114.791	6
24	MP2A	Mx	-.063	6
25	MP2B	X	-60.472	2
26	MP2B	Z	-104.741	2
27	MP2B	Mx	.1	2
28	MP2B	X	-60.472	6
29	MP2B	Z	-104.741	6
30	MP2B	Mx	.1	6
31	MP2C	X	-65.538	2
32	MP2C	Z	-113.515	2
33	MP2C	Mx	-.07	2
34	MP2C	X	-65.538	6
35	MP2C	Z	-113.515	6
36	MP2C	Mx	-.07	6
37	MP5A	X	-66.274	2
38	MP5A	Z	-114.791	2
39	MP5A	Mx	-.063	2
40	MP5A	X	-66.274	6
41	MP5A	Z	-114.791	6
42	MP5A	Mx	-.063	6
43	MP5B	X	-60.472	2
44	MP5B	Z	-104.741	2
45	MP5B	Mx	.1	2
46	MP5B	X	-60.472	6
47	MP5B	Z	-104.741	6
48	MP5B	Mx	.1	6

**Member Point Loads (BLC 14 : Antenna Wo (330 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	-65.538	2
50	MP5C	Z	-113.515	2
51	MP5C	Mx	-.07	2
52	MP5C	X	-65.538	6
53	MP5C	Z	-113.515	6
54	MP5C	Mx	-.07	6
55	MP3A	X	-90.971	2
56	MP3A	Z	-157.566	2
57	MP3A	Mx	-.06	2
58	MP3A	X	-90.971	6
59	MP3A	Z	-157.566	6
60	MP3A	Mx	-.06	6
61	MP3B	X	-90.971	2
62	MP3B	Z	-157.566	2
63	MP3B	Mx	.151	2
64	MP3B	X	-90.971	6
65	MP3B	Z	-157.566	6
66	MP3B	Mx	.151	6
67	MP3C	X	-72.268	2
68	MP3C	Z	-125.172	2
69	MP3C	Mx	-.072	2
70	MP3C	X	-72.268	6
71	MP3C	Z	-125.172	6
72	MP3C	Mx	-.072	6
73	MP3A	X	-90.971	2
74	MP3A	Z	-157.566	2
75	MP3A	Mx	.151	2
76	MP3A	X	-90.971	6
77	MP3A	Z	-157.566	6
78	MP3A	Mx	.151	6
79	MP3B	X	-90.971	2
80	MP3B	Z	-157.566	2
81	MP3B	Mx	-.06	2
82	MP3B	X	-90.971	6
83	MP3B	Z	-157.566	6
84	MP3B	Mx	-.06	6
85	MP3C	X	-72.268	2
86	MP3C	Z	-125.172	2
87	MP3C	Mx	-.072	2
88	MP3C	X	-72.268	6
89	MP3C	Z	-125.172	6
90	MP3C	Mx	-.072	6
91	MP6A	X	-52.154	2
92	MP6A	Z	-90.334	2
93	MP6A	Mx	0	2
94	MP3A	X	-33.644	4
95	MP3A	Z	-58.273	4
96	MP3A	Mx	-.017	4
97	MP3B	X	-33.644	4
98	MP3B	Z	-58.273	4
99	MP3B	Mx	-.017	4
100	MP3C	X	-24.522	4
101	MP3C	Z	-42.473	4
102	MP3C	Mx	.025	4
103	MP2A	X	-32.479	4
104	MP2A	Z	-56.256	4
105	MP2A	Mx	-.016	4
106	MP2B	X	-32.479	4
107	MP2B	Z	-56.256	4

**Member Point Loads (BLC 14 : Antenna Wo (330 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	-.016	4
109	MP2C	X	-19.863	4
110	MP2C	Z	-34.403	4
111	MP2C	Mx	.02	4
112	MP1A	X	-12.688	0
113	MP1A	Z	-21.977	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 15 : Antenna Wi (0 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	0	3
2	MP4A	Z	-18.326	3
3	MP4A	Mx	0	3
4	MP4A	X	0	5
5	MP4A	Z	-18.326	5
6	MP4A	Mx	0	5
7	MP4B	X	0	3
8	MP4B	Z	-10.422	3
9	MP4B	Mx	.008	3
10	MP4B	X	0	5
11	MP4B	Z	-10.422	5
12	MP4B	Mx	.008	5
13	MP4C	X	0	3
14	MP4C	Z	-10.422	3
15	MP4C	Mx	-.008	3
16	MP4C	X	0	5
17	MP4C	Z	-10.422	5
18	MP4C	Mx	-.008	5
19	MP2A	X	0	2
20	MP2A	Z	-24.636	2
21	MP2A	Mx	-.019	2
22	MP2A	X	0	6
23	MP2A	Z	-24.636	6
24	MP2A	Mx	-.019	6
25	MP2B	X	0	2
26	MP2B	Z	-24.636	2
27	MP2B	Mx	.019	2
28	MP2B	X	0	6
29	MP2B	Z	-24.636	6
30	MP2B	Mx	.019	6
31	MP2C	X	0	2
32	MP2C	Z	-26.972	2
33	MP2C	Mx	-.004	2
34	MP2C	X	0	6
35	MP2C	Z	-26.972	6
36	MP2C	Mx	-.004	6
37	MP5A	X	0	2
38	MP5A	Z	-24.636	2
39	MP5A	Mx	-.019	2
40	MP5A	X	0	6
41	MP5A	Z	-24.636	6
42	MP5A	Mx	-.019	6
43	MP5B	X	0	2
44	MP5B	Z	-24.636	2
45	MP5B	Mx	.019	2
46	MP5B	X	0	6
47	MP5B	Z	-24.636	6
48	MP5B	Mx	.019	6

**Member Point Loads (BLC 15 : Antenna Wi (0 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	0	2
50	MP5C	Z	-26.972	2
51	MP5C	Mx	-.004	2
52	MP5C	X	0	6
53	MP5C	Z	-26.972	6
54	MP5C	Mx	-.004	6
55	MP3A	X	0	2
56	MP3A	Z	-37.339	2
57	MP3A	Mx	-.025	2
58	MP3A	X	0	6
59	MP3A	Z	-37.339	6
60	MP3A	Mx	-.025	6
61	MP3B	X	0	2
62	MP3B	Z	-30.509	2
63	MP3B	Mx	.023	2
64	MP3B	X	0	6
65	MP3B	Z	-30.509	6
66	MP3B	Mx	.023	6
67	MP3C	X	0	2
68	MP3C	Z	-30.509	2
69	MP3C	Mx	-.003	2
70	MP3C	X	0	6
71	MP3C	Z	-30.509	6
72	MP3C	Mx	-.003	6
73	MP3A	X	0	2
74	MP3A	Z	-37.339	2
75	MP3A	Mx	.025	2
76	MP3A	X	0	6
77	MP3A	Z	-37.339	6
78	MP3A	Mx	.025	6
79	MP3B	X	0	2
80	MP3B	Z	-30.509	2
81	MP3B	Mx	.003	2
82	MP3B	X	0	6
83	MP3B	Z	-30.509	6
84	MP3B	Mx	.003	6
85	MP3C	X	0	2
86	MP3C	Z	-30.509	2
87	MP3C	Mx	-.023	2
88	MP3C	X	0	6
89	MP3C	Z	-30.509	6
90	MP3C	Mx	-.023	6
91	MP6A	X	0	2
92	MP6A	Z	-20.593	2
93	MP6A	Mx	0	2
94	MP3A	X	0	4
95	MP3A	Z	-15.42	4
96	MP3A	Mx	0	4
97	MP3B	X	0	4
98	MP3B	Z	-11.89	4
99	MP3B	Mx	-.005	4
100	MP3C	X	0	4
101	MP3C	Z	-11.89	4
102	MP3C	Mx	.005	4
103	MP2A	X	0	4
104	MP2A	Z	-15.42	4
105	MP2A	Mx	0	4
106	MP2B	X	0	4
107	MP2B	Z	-10.549	4

**Member Point Loads (BLC 15 : Antenna Wi (0 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	-.005	4
109	MP2C	X	0	4
110	MP2C	Z	-10.549	4
111	MP2C	Mx	.005	4
112	MP1A	X	0	0
113	MP1A	Z	-5.753	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 16 : Antenna Wi (30 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	7.846	3
2	MP4A	Z	-13.589	3
3	MP4A	Mx	-.007	3
4	MP4A	X	7.846	5
5	MP4A	Z	-13.589	5
6	MP4A	Mx	-.007	5
7	MP4B	X	3.893	3
8	MP4B	Z	-6.744	3
9	MP4B	Mx	.006	3
10	MP4B	X	3.893	5
11	MP4B	Z	-6.744	5
12	MP4B	Mx	.006	5
13	MP4C	X	7.846	3
14	MP4C	Z	-13.589	3
15	MP4C	Mx	-.007	3
16	MP4C	X	7.846	5
17	MP4C	Z	-13.589	5
18	MP4C	Mx	-.007	5
19	MP2A	X	12.065	2
20	MP2A	Z	-20.898	2
21	MP2A	Mx	-.02	2
22	MP2A	X	12.065	6
23	MP2A	Z	-20.898	6
24	MP2A	Mx	-.02	6
25	MP2B	X	13.045	2
26	MP2B	Z	-22.594	2
27	MP2B	Mx	.012	2
28	MP2B	X	13.045	6
29	MP2B	Z	-22.594	6
30	MP2B	Mx	.012	6
31	MP2C	X	13.358	2
32	MP2C	Z	-23.137	2
33	MP2C	Mx	.008	2
34	MP2C	X	13.358	6
35	MP2C	Z	-23.137	6
36	MP2C	Mx	.008	6
37	MP5A	X	12.065	2
38	MP5A	Z	-20.898	2
39	MP5A	Mx	-.02	2
40	MP5A	X	12.065	6
41	MP5A	Z	-20.898	6
42	MP5A	Mx	-.02	6
43	MP5B	X	13.045	2
44	MP5B	Z	-22.594	2
45	MP5B	Mx	.012	2
46	MP5B	X	13.045	6
47	MP5B	Z	-22.594	6
48	MP5B	Mx	.012	6





**Member Point Loads (BLC 16 : Antenna Wi (30 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	13.358	2
50	MP5C	Z	-23.137	2
51	MP5C	Mx	.008	2
52	MP5C	X	13.358	6
53	MP5C	Z	-23.137	6
54	MP5C	Mx	.008	6
55	MP3A	X	17.531	2
56	MP3A	Z	-30.365	2
57	MP3A	Mx	-.029	2
58	MP3A	X	17.531	6
59	MP3A	Z	-30.365	6
60	MP3A	Mx	-.029	6
61	MP3B	X	14.116	2
62	MP3B	Z	-24.45	2
63	MP3B	Mx	.014	2
64	MP3B	X	14.116	6
65	MP3B	Z	-24.45	6
66	MP3B	Mx	.014	6
67	MP3C	X	17.531	2
68	MP3C	Z	-30.365	2
69	MP3C	Mx	.011	2
70	MP3C	X	17.531	6
71	MP3C	Z	-30.365	6
72	MP3C	Mx	.011	6
73	MP3A	X	17.531	2
74	MP3A	Z	-30.365	2
75	MP3A	Mx	.011	2
76	MP3A	X	17.531	6
77	MP3A	Z	-30.365	6
78	MP3A	Mx	.011	6
79	MP3B	X	14.116	2
80	MP3B	Z	-24.45	2
81	MP3B	Mx	.014	2
82	MP3B	X	14.116	6
83	MP3B	Z	-24.45	6
84	MP3B	Mx	.014	6
85	MP3C	X	17.531	2
86	MP3C	Z	-30.365	2
87	MP3C	Mx	-.029	2
88	MP3C	X	17.531	6
89	MP3C	Z	-30.365	6
90	MP3C	Mx	-.029	6
91	MP6A	X	12.1	2
92	MP6A	Z	-20.957	2
93	MP6A	Mx	0	2
94	MP3A	X	7.122	4
95	MP3A	Z	-12.335	4
96	MP3A	Mx	.004	4
97	MP3B	X	5.357	4
98	MP3B	Z	-9.278	4
99	MP3B	Mx	-.005	4
100	MP3C	X	7.122	4
101	MP3C	Z	-12.335	4
102	MP3C	Mx	.004	4
103	MP2A	X	6.898	4
104	MP2A	Z	-11.948	4
105	MP2A	Mx	.003	4
106	MP2B	X	4.463	4
107	MP2B	Z	-7.73	4



**Member Point Loads (BLC 16 : Antenna Wi (30 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	-0.004	4
109	MP2C	X	6.898	4
110	MP2C	Z	-11.948	4
111	MP2C	Mx	.003	4
112	MP1A	X	3.318	0
113	MP1A	Z	-5.746	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 17 : Antenna Wi (60 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	9.025	3
2	MP4A	Z	-5.211	3
3	MP4A	Mx	-.008	3
4	MP4A	X	9.025	5
5	MP4A	Z	-5.211	5
6	MP4A	Mx	-.008	5
7	MP4B	X	9.025	3
8	MP4B	Z	-5.211	3
9	MP4B	Mx	.008	3
10	MP4B	X	9.025	5
11	MP4B	Z	-5.211	5
12	MP4B	Mx	.008	5
13	MP4C	X	15.871	3
14	MP4C	Z	-9.163	3
15	MP4C	Mx	0	3
16	MP4C	X	15.871	5
17	MP4C	Z	-9.163	5
18	MP4C	Mx	0	5
19	MP2A	X	21.72	2
20	MP2A	Z	-12.54	2
21	MP2A	Mx	-.017	2
22	MP2A	X	21.72	6
23	MP2A	Z	-12.54	6
24	MP2A	Mx	-.017	6
25	MP2B	X	23.417	2
26	MP2B	Z	-13.52	2
27	MP2B	Mx	.002	2
28	MP2B	X	23.417	6
29	MP2B	Z	-13.52	6
30	MP2B	Mx	.002	6
31	MP2C	X	21.935	2
32	MP2C	Z	-12.664	2
33	MP2C	Mx	.016	2
34	MP2C	X	21.935	6
35	MP2C	Z	-12.664	6
36	MP2C	Mx	.016	6
37	MP5A	X	21.72	2
38	MP5A	Z	-12.54	2
39	MP5A	Mx	-.017	2
40	MP5A	X	21.72	6
41	MP5A	Z	-12.54	6
42	MP5A	Mx	-.017	6
43	MP5B	X	23.417	2
44	MP5B	Z	-13.52	2
45	MP5B	Mx	.002	2
46	MP5B	X	23.417	6
47	MP5B	Z	-13.52	6
48	MP5B	Mx	.002	6



**Member Point Loads (BLC 17 : Antenna Wi (60 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	21.935	2
50	MP5C	Z	-12.664	2
51	MP5C	Mx	.016	2
52	MP5C	X	21.935	6
53	MP5C	Z	-12.664	6
54	MP5C	Mx	.016	6
55	MP3A	X	26.422	2
56	MP3A	Z	-15.255	2
57	MP3A	Mx	-.023	2
58	MP3A	X	26.422	6
59	MP3A	Z	-15.255	6
60	MP3A	Mx	-.023	6
61	MP3B	X	26.422	2
62	MP3B	Z	-15.255	2
63	MP3B	Mx	.003	2
64	MP3B	X	26.422	6
65	MP3B	Z	-15.255	6
66	MP3B	Mx	.003	6
67	MP3C	X	32.336	2
68	MP3C	Z	-18.669	2
69	MP3C	Mx	.025	2
70	MP3C	X	32.336	6
71	MP3C	Z	-18.669	6
72	MP3C	Mx	.025	6
73	MP3A	X	26.422	2
74	MP3A	Z	-15.255	2
75	MP3A	Mx	-.003	2
76	MP3A	X	26.422	6
77	MP3A	Z	-15.255	6
78	MP3A	Mx	-.003	6
79	MP3B	X	26.422	2
80	MP3B	Z	-15.255	2
81	MP3B	Mx	.023	2
82	MP3B	X	26.422	6
83	MP3B	Z	-15.255	6
84	MP3B	Mx	.023	6
85	MP3C	X	32.336	2
86	MP3C	Z	-18.669	2
87	MP3C	Mx	-.025	2
88	MP3C	X	32.336	6
89	MP3C	Z	-18.669	6
90	MP3C	Mx	-.025	6
91	MP6A	X	24.788	2
92	MP6A	Z	-14.312	2
93	MP6A	Mx	0	2
94	MP3A	X	10.297	4
95	MP3A	Z	-5.945	4
96	MP3A	Mx	.005	4
97	MP3B	X	10.297	4
98	MP3B	Z	-5.945	4
99	MP3B	Mx	-.005	4
100	MP3C	X	13.354	4
101	MP3C	Z	-7.71	4
102	MP3C	Mx	0	4
103	MP2A	X	9.136	4
104	MP2A	Z	-5.275	4
105	MP2A	Mx	.005	4
106	MP2B	X	9.136	4
107	MP2B	Z	-5.275	4

**Member Point Loads (BLC 17 : Antenna Wi (60 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	-0.005	4
109	MP2C	X	13.354	4
110	MP2C	Z	-7.71	4
111	MP2C	Mx	0	4
112	MP1A	X	6.684	0
113	MP1A	Z	-3.859	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 18 : Antenna Wi (90 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	7.787	3
2	MP4A	Z	0	3
3	MP4A	Mx	-0.006	3
4	MP4A	X	7.787	5
5	MP4A	Z	0	5
6	MP4A	Mx	-0.006	5
7	MP4B	X	15.691	3
8	MP4B	Z	0	3
9	MP4B	Mx	.007	3
10	MP4B	X	15.691	5
11	MP4B	Z	0	5
12	MP4B	Mx	.007	5
13	MP4C	X	15.691	3
14	MP4C	Z	0	3
15	MP4C	Mx	.007	3
16	MP4C	X	15.691	5
17	MP4C	Z	0	5
18	MP4C	Mx	.007	5
19	MP2A	X	26.534	2
20	MP2A	Z	0	2
21	MP2A	Mx	-0.009	2
22	MP2A	X	26.534	6
23	MP2A	Z	0	6
24	MP2A	Mx	-0.009	6
25	MP2B	X	26.534	2
26	MP2B	Z	0	2
27	MP2B	Mx	-0.009	2
28	MP2B	X	26.534	6
29	MP2B	Z	0	6
30	MP2B	Mx	-0.009	6
31	MP2C	X	24.197	2
32	MP2C	Z	0	2
33	MP2C	Mx	.02	2
34	MP2C	X	24.197	6
35	MP2C	Z	0	6
36	MP2C	Mx	.02	6
37	MP5A	X	26.534	2
38	MP5A	Z	0	2
39	MP5A	Mx	-0.009	2
40	MP5A	X	26.534	6
41	MP5A	Z	0	6
42	MP5A	Mx	-0.009	6
43	MP5B	X	26.534	2
44	MP5B	Z	0	2
45	MP5B	Mx	-0.009	2
46	MP5B	X	26.534	6
47	MP5B	Z	0	6
48	MP5B	Mx	-0.009	6



**Member Point Loads (BLC 18 : Antenna Wi (90 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	24.197	2
50	MP5C	Z	0	2
51	MP5C	Mx	.02	2
52	MP5C	X	24.197	6
53	MP5C	Z	0	6
54	MP5C	Mx	.02	6
55	MP3A	X	28.233	2
56	MP3A	Z	0	2
57	MP3A	Mx	-.014	2
58	MP3A	X	28.233	6
59	MP3A	Z	0	6
60	MP3A	Mx	-.014	6
61	MP3B	X	35.062	2
62	MP3B	Z	0	2
63	MP3B	Mx	-.011	2
64	MP3B	X	35.062	6
65	MP3B	Z	0	6
66	MP3B	Mx	-.011	6
67	MP3C	X	35.062	2
68	MP3C	Z	0	2
69	MP3C	Mx	.029	2
70	MP3C	X	35.062	6
71	MP3C	Z	0	6
72	MP3C	Mx	.029	6
73	MP3A	X	28.233	2
74	MP3A	Z	0	2
75	MP3A	Mx	-.014	2
76	MP3A	X	28.233	6
77	MP3A	Z	0	6
78	MP3A	Mx	-.014	6
79	MP3B	X	35.062	2
80	MP3B	Z	0	2
81	MP3B	Mx	.029	2
82	MP3B	X	35.062	6
83	MP3B	Z	0	6
84	MP3B	Mx	.029	6
85	MP3C	X	35.062	2
86	MP3C	Z	0	2
87	MP3C	Mx	-.011	2
88	MP3C	X	35.062	6
89	MP3C	Z	0	6
90	MP3C	Mx	-.011	6
91	MP6A	X	29.441	2
92	MP6A	Z	0	2
93	MP6A	Mx	0	2
94	MP3A	X	10.714	4
95	MP3A	Z	0	4
96	MP3A	Mx	.005	4
97	MP3B	X	14.244	4
98	MP3B	Z	0	4
99	MP3B	Mx	-.004	4
100	MP3C	X	14.244	4
101	MP3C	Z	0	4
102	MP3C	Mx	-.004	4
103	MP2A	X	8.925	4
104	MP2A	Z	0	4
105	MP2A	Mx	.004	4
106	MP2B	X	13.797	4
107	MP2B	Z	0	4





**Member Point Loads (BLC 18 : Antenna Wi (90 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
108	MP2B	Mx	-0.003	4
109	MP2C	X	13.797	4
110	MP2C	Z	0	4
111	MP2C	Mx	-0.003	4
112	MP1A	X	7.918	0
113	MP1A	Z	0	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 19 : Antenna Wi (120 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
1	MP4A	X	9.025	3
2	MP4A	Z	5.211	3
3	MP4A	Mx	-0.008	3
4	MP4A	X	9.025	5
5	MP4A	Z	5.211	5
6	MP4A	Mx	-0.008	5
7	MP4B	X	15.871	3
8	MP4B	Z	9.163	3
9	MP4B	Mx	0	3
10	MP4B	X	15.871	5
11	MP4B	Z	9.163	5
12	MP4B	Mx	0	5
13	MP4C	X	9.025	3
14	MP4C	Z	5.211	3
15	MP4C	Mx	.008	3
16	MP4C	X	9.025	5
17	MP4C	Z	5.211	5
18	MP4C	Mx	.008	5
19	MP2A	X	23.417	2
20	MP2A	Z	13.52	2
21	MP2A	Mx	.002	2
22	MP2A	X	23.417	6
23	MP2A	Z	13.52	6
24	MP2A	Mx	.002	6
25	MP2B	X	21.72	2
26	MP2B	Z	12.54	2
27	MP2B	Mx	-0.017	2
28	MP2B	X	21.72	6
29	MP2B	Z	12.54	6
30	MP2B	Mx	-0.017	6
31	MP2C	X	21.177	2
32	MP2C	Z	12.227	2
33	MP2C	Mx	.019	2
34	MP2C	X	21.177	6
35	MP2C	Z	12.227	6
36	MP2C	Mx	.019	6
37	MP5A	X	23.417	2
38	MP5A	Z	13.52	2
39	MP5A	Mx	.002	2
40	MP5A	X	23.417	6
41	MP5A	Z	13.52	6
42	MP5A	Mx	.002	6
43	MP5B	X	21.72	2
44	MP5B	Z	12.54	2
45	MP5B	Mx	-0.017	2
46	MP5B	X	21.72	6
47	MP5B	Z	12.54	6
48	MP5B	Mx	-0.017	6

**Member Point Loads (BLC 19 : Antenna Wi (120 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	21.177	2
50	MP5C	Z	12.227	2
51	MP5C	Mx	.019	2
52	MP5C	X	21.177	6
53	MP5C	Z	12.227	6
54	MP5C	Mx	.019	6
55	MP3A	X	26.422	2
56	MP3A	Z	15.255	2
57	MP3A	Mx	-.003	2
58	MP3A	X	26.422	6
59	MP3A	Z	15.255	6
60	MP3A	Mx	-.003	6
61	MP3B	X	32.336	2
62	MP3B	Z	18.669	2
63	MP3B	Mx	-.025	2
64	MP3B	X	32.336	6
65	MP3B	Z	18.669	6
66	MP3B	Mx	-.025	6
67	MP3C	X	26.422	2
68	MP3C	Z	15.255	2
69	MP3C	Mx	.023	2
70	MP3C	X	26.422	6
71	MP3C	Z	15.255	6
72	MP3C	Mx	.023	6
73	MP3A	X	26.422	2
74	MP3A	Z	15.255	2
75	MP3A	Mx	-.023	2
76	MP3A	X	26.422	6
77	MP3A	Z	15.255	6
78	MP3A	Mx	-.023	6
79	MP3B	X	32.336	2
80	MP3B	Z	18.669	2
81	MP3B	Mx	.025	2
82	MP3B	X	32.336	6
83	MP3B	Z	18.669	6
84	MP3B	Mx	.025	6
85	MP3C	X	26.422	2
86	MP3C	Z	15.255	2
87	MP3C	Mx	.003	2
88	MP3C	X	26.422	6
89	MP3C	Z	15.255	6
90	MP3C	Mx	.003	6
91	MP6A	X	22.373	2
92	MP6A	Z	12.917	2
93	MP6A	Mx	0	2
94	MP3A	X	10.297	4
95	MP3A	Z	5.945	4
96	MP3A	Mx	.005	4
97	MP3B	X	13.354	4
98	MP3B	Z	7.71	4
99	MP3B	Mx	0	4
100	MP3C	X	10.297	4
101	MP3C	Z	5.945	4
102	MP3C	Mx	-.005	4
103	MP2A	X	9.136	4
104	MP2A	Z	5.275	4
105	MP2A	Mx	.005	4
106	MP2B	X	13.354	4
107	MP2B	Z	7.71	4

**Member Point Loads (BLC 19 : Antenna Wi (120 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
108	MP2B	Mx	0	4
109	MP2C	X	9.136	4
110	MP2C	Z	5.275	4
111	MP2C	Mx	-.005	4
112	MP1A	X	6.093	0
113	MP1A	Z	3.518	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 20 : Antenna Wi (150 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
1	MP4A	X	7.846	3
2	MP4A	Z	13.589	3
3	MP4A	Mx	-.007	3
4	MP4A	X	7.846	5
5	MP4A	Z	13.589	5
6	MP4A	Mx	-.007	5
7	MP4B	X	7.846	3
8	MP4B	Z	13.589	3
9	MP4B	Mx	-.007	3
10	MP4B	X	7.846	5
11	MP4B	Z	13.589	5
12	MP4B	Mx	-.007	5
13	MP4C	X	3.893	3
14	MP4C	Z	6.744	3
15	MP4C	Mx	.006	3
16	MP4C	X	3.893	5
17	MP4C	Z	6.744	5
18	MP4C	Mx	.006	5
19	MP2A	X	13.045	2
20	MP2A	Z	22.594	2
21	MP2A	Mx	.012	2
22	MP2A	X	13.045	6
23	MP2A	Z	22.594	6
24	MP2A	Mx	.012	6
25	MP2B	X	12.065	2
26	MP2B	Z	20.898	2
27	MP2B	Mx	-.02	2
28	MP2B	X	12.065	6
29	MP2B	Z	20.898	6
30	MP2B	Mx	-.02	6
31	MP2C	X	12.921	2
32	MP2C	Z	22.379	2
33	MP2C	Mx	.014	2
34	MP2C	X	12.921	6
35	MP2C	Z	22.379	6
36	MP2C	Mx	.014	6
37	MP5A	X	13.045	2
38	MP5A	Z	22.594	2
39	MP5A	Mx	.012	2
40	MP5A	X	13.045	6
41	MP5A	Z	22.594	6
42	MP5A	Mx	.012	6
43	MP5B	X	12.065	2
44	MP5B	Z	20.898	2
45	MP5B	Mx	-.02	2
46	MP5B	X	12.065	6
47	MP5B	Z	20.898	6
48	MP5B	Mx	-.02	6



**Member Point Loads (BLC 20 : Antenna Wi (150 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	12.921	2
50	MP5C	Z	22.379	2
51	MP5C	Mx	.014	2
52	MP5C	X	12.921	6
53	MP5C	Z	22.379	6
54	MP5C	Mx	.014	6
55	MP3A	X	17.531	2
56	MP3A	Z	30.365	2
57	MP3A	Mx	.011	2
58	MP3A	X	17.531	6
59	MP3A	Z	30.365	6
60	MP3A	Mx	.011	6
61	MP3B	X	17.531	2
62	MP3B	Z	30.365	2
63	MP3B	Mx	-.029	2
64	MP3B	X	17.531	6
65	MP3B	Z	30.365	6
66	MP3B	Mx	-.029	6
67	MP3C	X	14.116	2
68	MP3C	Z	24.45	2
69	MP3C	Mx	.014	2
70	MP3C	X	14.116	6
71	MP3C	Z	24.45	6
72	MP3C	Mx	.014	6
73	MP3A	X	17.531	2
74	MP3A	Z	30.365	2
75	MP3A	Mx	-.029	2
76	MP3A	X	17.531	6
77	MP3A	Z	30.365	6
78	MP3A	Mx	-.029	6
79	MP3B	X	17.531	2
80	MP3B	Z	30.365	2
81	MP3B	Mx	.011	2
82	MP3B	X	17.531	6
83	MP3B	Z	30.365	6
84	MP3B	Mx	.011	6
85	MP3C	X	14.116	2
86	MP3C	Z	24.45	2
87	MP3C	Mx	.014	2
88	MP3C	X	14.116	6
89	MP3C	Z	24.45	6
90	MP3C	Mx	.014	6
91	MP6A	X	10.705	2
92	MP6A	Z	18.542	2
93	MP6A	Mx	0	2
94	MP3A	X	7.122	4
95	MP3A	Z	12.335	4
96	MP3A	Mx	.004	4
97	MP3B	X	7.122	4
98	MP3B	Z	12.335	4
99	MP3B	Mx	.004	4
100	MP3C	X	5.357	4
101	MP3C	Z	9.278	4
102	MP3C	Mx	-.005	4
103	MP2A	X	6.898	4
104	MP2A	Z	11.948	4
105	MP2A	Mx	.003	4
106	MP2B	X	6.898	4
107	MP2B	Z	11.948	4



**Member Point Loads (BLC 20 : Antenna Wi (150 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	.003	4
109	MP2C	X	4.463	4
110	MP2C	Z	7.73	4
111	MP2C	Mx	-.004	4
112	MP1A	X	2.976	0
113	MP1A	Z	5.155	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 21 : Antenna Wi (180 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	0	3
2	MP4A	Z	18.326	3
3	MP4A	Mx	0	3
4	MP4A	X	0	5
5	MP4A	Z	18.326	5
6	MP4A	Mx	0	5
7	MP4B	X	0	3
8	MP4B	Z	10.422	3
9	MP4B	Mx	-.008	3
10	MP4B	X	0	5
11	MP4B	Z	10.422	5
12	MP4B	Mx	-.008	5
13	MP4C	X	0	3
14	MP4C	Z	10.422	3
15	MP4C	Mx	.008	3
16	MP4C	X	0	5
17	MP4C	Z	10.422	5
18	MP4C	Mx	.008	5
19	MP2A	X	0	2
20	MP2A	Z	24.636	2
21	MP2A	Mx	.019	2
22	MP2A	X	0	6
23	MP2A	Z	24.636	6
24	MP2A	Mx	.019	6
25	MP2B	X	0	2
26	MP2B	Z	24.636	2
27	MP2B	Mx	-.019	2
28	MP2B	X	0	6
29	MP2B	Z	24.636	6
30	MP2B	Mx	-.019	6
31	MP2C	X	0	2
32	MP2C	Z	26.972	2
33	MP2C	Mx	.004	2
34	MP2C	X	0	6
35	MP2C	Z	26.972	6
36	MP2C	Mx	.004	6
37	MP5A	X	0	2
38	MP5A	Z	24.636	2
39	MP5A	Mx	.019	2
40	MP5A	X	0	6
41	MP5A	Z	24.636	6
42	MP5A	Mx	.019	6
43	MP5B	X	0	2
44	MP5B	Z	24.636	2
45	MP5B	Mx	-.019	2
46	MP5B	X	0	6
47	MP5B	Z	24.636	6
48	MP5B	Mx	-.019	6

**Member Point Loads (BLC 21 : Antenna Wi (180 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	0	2
50	MP5C	Z	26.972	2
51	MP5C	Mx	.004	2
52	MP5C	X	0	6
53	MP5C	Z	26.972	6
54	MP5C	Mx	.004	6
55	MP3A	X	0	2
56	MP3A	Z	37.339	2
57	MP3A	Mx	.025	2
58	MP3A	X	0	6
59	MP3A	Z	37.339	6
60	MP3A	Mx	.025	6
61	MP3B	X	0	2
62	MP3B	Z	30.509	2
63	MP3B	Mx	-.023	2
64	MP3B	X	0	6
65	MP3B	Z	30.509	6
66	MP3B	Mx	-.023	6
67	MP3C	X	0	2
68	MP3C	Z	30.509	2
69	MP3C	Mx	.003	2
70	MP3C	X	0	6
71	MP3C	Z	30.509	6
72	MP3C	Mx	.003	6
73	MP3A	X	0	2
74	MP3A	Z	37.339	2
75	MP3A	Mx	-.025	2
76	MP3A	X	0	6
77	MP3A	Z	37.339	6
78	MP3A	Mx	-.025	6
79	MP3B	X	0	2
80	MP3B	Z	30.509	2
81	MP3B	Mx	-.003	2
82	MP3B	X	0	6
83	MP3B	Z	30.509	6
84	MP3B	Mx	-.003	6
85	MP3C	X	0	2
86	MP3C	Z	30.509	2
87	MP3C	Mx	.023	2
88	MP3C	X	0	6
89	MP3C	Z	30.509	6
90	MP3C	Mx	.023	6
91	MP6A	X	0	2
92	MP6A	Z	20.593	2
93	MP6A	Mx	0	2
94	MP3A	X	0	4
95	MP3A	Z	15.42	4
96	MP3A	Mx	0	4
97	MP3B	X	0	4
98	MP3B	Z	11.89	4
99	MP3B	Mx	.005	4
100	MP3C	X	0	4
101	MP3C	Z	11.89	4
102	MP3C	Mx	-.005	4
103	MP2A	X	0	4
104	MP2A	Z	15.42	4
105	MP2A	Mx	0	4
106	MP2B	X	0	4
107	MP2B	Z	10.549	4



**Member Point Loads (BLC 21 : Antenna Wi (180 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	.005	4
109	MP2C	X	0	4
110	MP2C	Z	10.549	4
111	MP2C	Mx	-.005	4
112	MP1A	X	0	0
113	MP1A	Z	5.753	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 22 : Antenna Wi (210 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	-7.846	3
2	MP4A	Z	13.589	3
3	MP4A	Mx	.007	3
4	MP4A	X	-7.846	5
5	MP4A	Z	13.589	5
6	MP4A	Mx	.007	5
7	MP4B	X	-3.893	3
8	MP4B	Z	6.744	3
9	MP4B	Mx	-.006	3
10	MP4B	X	-3.893	5
11	MP4B	Z	6.744	5
12	MP4B	Mx	-.006	5
13	MP4C	X	-7.846	3
14	MP4C	Z	13.589	3
15	MP4C	Mx	.007	3
16	MP4C	X	-7.846	5
17	MP4C	Z	13.589	5
18	MP4C	Mx	.007	5
19	MP2A	X	-12.065	2
20	MP2A	Z	20.898	2
21	MP2A	Mx	.02	2
22	MP2A	X	-12.065	6
23	MP2A	Z	20.898	6
24	MP2A	Mx	.02	6
25	MP2B	X	-13.045	2
26	MP2B	Z	22.594	2
27	MP2B	Mx	-.012	2
28	MP2B	X	-13.045	6
29	MP2B	Z	22.594	6
30	MP2B	Mx	-.012	6
31	MP2C	X	-13.358	2
32	MP2C	Z	23.137	2
33	MP2C	Mx	-.008	2
34	MP2C	X	-13.358	6
35	MP2C	Z	23.137	6
36	MP2C	Mx	-.008	6
37	MP5A	X	-12.065	2
38	MP5A	Z	20.898	2
39	MP5A	Mx	.02	2
40	MP5A	X	-12.065	6
41	MP5A	Z	20.898	6
42	MP5A	Mx	.02	6
43	MP5B	X	-13.045	2
44	MP5B	Z	22.594	2
45	MP5B	Mx	-.012	2
46	MP5B	X	-13.045	6
47	MP5B	Z	22.594	6
48	MP5B	Mx	-.012	6



**Member Point Loads (BLC 22 : Antenna Wi (210 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	-13.358	2
50	MP5C	Z	23.137	2
51	MP5C	Mx	-.008	2
52	MP5C	X	-13.358	6
53	MP5C	Z	23.137	6
54	MP5C	Mx	-.008	6
55	MP3A	X	-17.531	2
56	MP3A	Z	30.365	2
57	MP3A	Mx	.029	2
58	MP3A	X	-17.531	6
59	MP3A	Z	30.365	6
60	MP3A	Mx	.029	6
61	MP3B	X	-14.116	2
62	MP3B	Z	24.45	2
63	MP3B	Mx	-.014	2
64	MP3B	X	-14.116	6
65	MP3B	Z	24.45	6
66	MP3B	Mx	-.014	6
67	MP3C	X	-17.531	2
68	MP3C	Z	30.365	2
69	MP3C	Mx	-.011	2
70	MP3C	X	-17.531	6
71	MP3C	Z	30.365	6
72	MP3C	Mx	-.011	6
73	MP3A	X	-17.531	2
74	MP3A	Z	30.365	2
75	MP3A	Mx	-.011	2
76	MP3A	X	-17.531	6
77	MP3A	Z	30.365	6
78	MP3A	Mx	-.011	6
79	MP3B	X	-14.116	2
80	MP3B	Z	24.45	2
81	MP3B	Mx	-.014	2
82	MP3B	X	-14.116	6
83	MP3B	Z	24.45	6
84	MP3B	Mx	-.014	6
85	MP3C	X	-17.531	2
86	MP3C	Z	30.365	2
87	MP3C	Mx	.029	2
88	MP3C	X	-17.531	6
89	MP3C	Z	30.365	6
90	MP3C	Mx	.029	6
91	MP6A	X	-12.1	2
92	MP6A	Z	20.957	2
93	MP6A	Mx	0	2
94	MP3A	X	-7.122	4
95	MP3A	Z	12.335	4
96	MP3A	Mx	-.004	4
97	MP3B	X	-5.357	4
98	MP3B	Z	9.278	4
99	MP3B	Mx	.005	4
100	MP3C	X	-7.122	4
101	MP3C	Z	12.335	4
102	MP3C	Mx	-.004	4
103	MP2A	X	-6.898	4
104	MP2A	Z	11.948	4
105	MP2A	Mx	-.003	4
106	MP2B	X	-4.463	4
107	MP2B	Z	7.73	4

**Member Point Loads (BLC 22 : Antenna Wi (210 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	.004	4
109	MP2C	X	-6.898	4
110	MP2C	Z	11.948	4
111	MP2C	Mx	-.003	4
112	MP1A	X	-3.318	0
113	MP1A	Z	5.746	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 23 : Antenna Wi (240 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	-9.025	3
2	MP4A	Z	5.211	3
3	MP4A	Mx	.008	3
4	MP4A	X	-9.025	5
5	MP4A	Z	5.211	5
6	MP4A	Mx	.008	5
7	MP4B	X	-9.025	3
8	MP4B	Z	5.211	3
9	MP4B	Mx	-.008	3
10	MP4B	X	-9.025	5
11	MP4B	Z	5.211	5
12	MP4B	Mx	-.008	5
13	MP4C	X	-15.871	3
14	MP4C	Z	9.163	3
15	MP4C	Mx	0	3
16	MP4C	X	-15.871	5
17	MP4C	Z	9.163	5
18	MP4C	Mx	0	5
19	MP2A	X	-21.72	2
20	MP2A	Z	12.54	2
21	MP2A	Mx	.017	2
22	MP2A	X	-21.72	6
23	MP2A	Z	12.54	6
24	MP2A	Mx	.017	6
25	MP2B	X	-23.417	2
26	MP2B	Z	13.52	2
27	MP2B	Mx	-.002	2
28	MP2B	X	-23.417	6
29	MP2B	Z	13.52	6
30	MP2B	Mx	-.002	6
31	MP2C	X	-21.935	2
32	MP2C	Z	12.664	2
33	MP2C	Mx	-.016	2
34	MP2C	X	-21.935	6
35	MP2C	Z	12.664	6
36	MP2C	Mx	-.016	6
37	MP5A	X	-21.72	2
38	MP5A	Z	12.54	2
39	MP5A	Mx	.017	2
40	MP5A	X	-21.72	6
41	MP5A	Z	12.54	6
42	MP5A	Mx	.017	6
43	MP5B	X	-23.417	2
44	MP5B	Z	13.52	2
45	MP5B	Mx	-.002	2
46	MP5B	X	-23.417	6
47	MP5B	Z	13.52	6
48	MP5B	Mx	-.002	6



**Member Point Loads (BLC 23 : Antenna Wi (240 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	-21.935	2
50	MP5C	Z	12.664	2
51	MP5C	Mx	-.016	2
52	MP5C	X	-21.935	6
53	MP5C	Z	12.664	6
54	MP5C	Mx	-.016	6
55	MP3A	X	-26.422	2
56	MP3A	Z	15.255	2
57	MP3A	Mx	.023	2
58	MP3A	X	-26.422	6
59	MP3A	Z	15.255	6
60	MP3A	Mx	.023	6
61	MP3B	X	-26.422	2
62	MP3B	Z	15.255	2
63	MP3B	Mx	-.003	2
64	MP3B	X	-26.422	6
65	MP3B	Z	15.255	6
66	MP3B	Mx	-.003	6
67	MP3C	X	-32.336	2
68	MP3C	Z	18.669	2
69	MP3C	Mx	-.025	2
70	MP3C	X	-32.336	6
71	MP3C	Z	18.669	6
72	MP3C	Mx	-.025	6
73	MP3A	X	-26.422	2
74	MP3A	Z	15.255	2
75	MP3A	Mx	.003	2
76	MP3A	X	-26.422	6
77	MP3A	Z	15.255	6
78	MP3A	Mx	.003	6
79	MP3B	X	-26.422	2
80	MP3B	Z	15.255	2
81	MP3B	Mx	-.023	2
82	MP3B	X	-26.422	6
83	MP3B	Z	15.255	6
84	MP3B	Mx	-.023	6
85	MP3C	X	-32.336	2
86	MP3C	Z	18.669	2
87	MP3C	Mx	.025	2
88	MP3C	X	-32.336	6
89	MP3C	Z	18.669	6
90	MP3C	Mx	.025	6
91	MP6A	X	-24.788	2
92	MP6A	Z	14.312	2
93	MP6A	Mx	0	2
94	MP3A	X	-10.297	4
95	MP3A	Z	5.945	4
96	MP3A	Mx	-.005	4
97	MP3B	X	-10.297	4
98	MP3B	Z	5.945	4
99	MP3B	Mx	.005	4
100	MP3C	X	-13.354	4
101	MP3C	Z	7.71	4
102	MP3C	Mx	0	4
103	MP2A	X	-9.136	4
104	MP2A	Z	5.275	4
105	MP2A	Mx	-.005	4
106	MP2B	X	-9.136	4
107	MP2B	Z	5.275	4

**Member Point Loads (BLC 23 : Antenna Wi (240 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	.005	4
109	MP2C	X	-13.354	4
110	MP2C	Z	7.71	4
111	MP2C	Mx	0	4
112	MP1A	X	-6.684	0
113	MP1A	Z	3.859	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 24 : Antenna Wi (270 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	-7.787	3
2	MP4A	Z	0	3
3	MP4A	Mx	.006	3
4	MP4A	X	-7.787	5
5	MP4A	Z	0	5
6	MP4A	Mx	.006	5
7	MP4B	X	-15.691	3
8	MP4B	Z	0	3
9	MP4B	Mx	-.007	3
10	MP4B	X	-15.691	5
11	MP4B	Z	0	5
12	MP4B	Mx	-.007	5
13	MP4C	X	-15.691	3
14	MP4C	Z	0	3
15	MP4C	Mx	-.007	3
16	MP4C	X	-15.691	5
17	MP4C	Z	0	5
18	MP4C	Mx	-.007	5
19	MP2A	X	-26.534	2
20	MP2A	Z	0	2
21	MP2A	Mx	.009	2
22	MP2A	X	-26.534	6
23	MP2A	Z	0	6
24	MP2A	Mx	.009	6
25	MP2B	X	-26.534	2
26	MP2B	Z	0	2
27	MP2B	Mx	.009	2
28	MP2B	X	-26.534	6
29	MP2B	Z	0	6
30	MP2B	Mx	.009	6
31	MP2C	X	-24.197	2
32	MP2C	Z	0	2
33	MP2C	Mx	-.02	2
34	MP2C	X	-24.197	6
35	MP2C	Z	0	6
36	MP2C	Mx	-.02	6
37	MP5A	X	-26.534	2
38	MP5A	Z	0	2
39	MP5A	Mx	.009	2
40	MP5A	X	-26.534	6
41	MP5A	Z	0	6
42	MP5A	Mx	.009	6
43	MP5B	X	-26.534	2
44	MP5B	Z	0	2
45	MP5B	Mx	.009	2
46	MP5B	X	-26.534	6
47	MP5B	Z	0	6
48	MP5B	Mx	.009	6





**Member Point Loads (BLC 24 : Antenna Wi (270 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
108	MP2B	Mx	.003	4
109	MP2C	X	-13.797	4
110	MP2C	Z	0	4
111	MP2C	Mx	.003	4
112	MP1A	X	-7.918	0
113	MP1A	Z	0	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 25 : Antenna Wi (300 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
1	MP4A	X	-9.025	3
2	MP4A	Z	-5.211	3
3	MP4A	Mx	.008	3
4	MP4A	X	-9.025	5
5	MP4A	Z	-5.211	5
6	MP4A	Mx	.008	5
7	MP4B	X	-15.871	3
8	MP4B	Z	-9.163	3
9	MP4B	Mx	0	3
10	MP4B	X	-15.871	5
11	MP4B	Z	-9.163	5
12	MP4B	Mx	0	5
13	MP4C	X	-9.025	3
14	MP4C	Z	-5.211	3
15	MP4C	Mx	-.008	3
16	MP4C	X	-9.025	5
17	MP4C	Z	-5.211	5
18	MP4C	Mx	-.008	5
19	MP2A	X	-23.417	2
20	MP2A	Z	-13.52	2
21	MP2A	Mx	-.002	2
22	MP2A	X	-23.417	6
23	MP2A	Z	-13.52	6
24	MP2A	Mx	-.002	6
25	MP2B	X	-21.72	2
26	MP2B	Z	-12.54	2
27	MP2B	Mx	.017	2
28	MP2B	X	-21.72	6
29	MP2B	Z	-12.54	6
30	MP2B	Mx	.017	6
31	MP2C	X	-21.177	2
32	MP2C	Z	-12.227	2
33	MP2C	Mx	-.019	2
34	MP2C	X	-21.177	6
35	MP2C	Z	-12.227	6
36	MP2C	Mx	-.019	6
37	MP5A	X	-23.417	2
38	MP5A	Z	-13.52	2
39	MP5A	Mx	-.002	2
40	MP5A	X	-23.417	6
41	MP5A	Z	-13.52	6
42	MP5A	Mx	-.002	6
43	MP5B	X	-21.72	2
44	MP5B	Z	-12.54	2
45	MP5B	Mx	.017	2
46	MP5B	X	-21.72	6
47	MP5B	Z	-12.54	6
48	MP5B	Mx	.017	6



**Member Point Loads (BLC 25 : Antenna Wi (300 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
108	MP2B	Mx	0	4
109	MP2C	X	-9.136	4
110	MP2C	Z	-5.275	4
111	MP2C	Mx	.005	4
112	MP1A	X	-6.093	0
113	MP1A	Z	-3.518	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 26 : Antenna Wi (330 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
1	MP4A	X	-7.846	3
2	MP4A	Z	-13.589	3
3	MP4A	Mx	.007	3
4	MP4A	X	-7.846	5
5	MP4A	Z	-13.589	5
6	MP4A	Mx	.007	5
7	MP4B	X	-7.846	3
8	MP4B	Z	-13.589	3
9	MP4B	Mx	.007	3
10	MP4B	X	-7.846	5
11	MP4B	Z	-13.589	5
12	MP4B	Mx	.007	5
13	MP4C	X	-3.893	3
14	MP4C	Z	-6.744	3
15	MP4C	Mx	-.006	3
16	MP4C	X	-3.893	5
17	MP4C	Z	-6.744	5
18	MP4C	Mx	-.006	5
19	MP2A	X	-13.045	2
20	MP2A	Z	-22.594	2
21	MP2A	Mx	-.012	2
22	MP2A	X	-13.045	6
23	MP2A	Z	-22.594	6
24	MP2A	Mx	-.012	6
25	MP2B	X	-12.065	2
26	MP2B	Z	-20.898	2
27	MP2B	Mx	.02	2
28	MP2B	X	-12.065	6
29	MP2B	Z	-20.898	6
30	MP2B	Mx	.02	6
31	MP2C	X	-12.921	2
32	MP2C	Z	-22.379	2
33	MP2C	Mx	-.014	2
34	MP2C	X	-12.921	6
35	MP2C	Z	-22.379	6
36	MP2C	Mx	-.014	6
37	MP5A	X	-13.045	2
38	MP5A	Z	-22.594	2
39	MP5A	Mx	-.012	2
40	MP5A	X	-13.045	6
41	MP5A	Z	-22.594	6
42	MP5A	Mx	-.012	6
43	MP5B	X	-12.065	2
44	MP5B	Z	-20.898	2
45	MP5B	Mx	.02	2
46	MP5B	X	-12.065	6
47	MP5B	Z	-20.898	6
48	MP5B	Mx	.02	6

**Member Point Loads (BLC 26 : Antenna Wi (330 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	-12.921	2
50	MP5C	Z	-22.379	2
51	MP5C	Mx	-.014	2
52	MP5C	X	-12.921	6
53	MP5C	Z	-22.379	6
54	MP5C	Mx	-.014	6
55	MP3A	X	-17.531	2
56	MP3A	Z	-30.365	2
57	MP3A	Mx	-.011	2
58	MP3A	X	-17.531	6
59	MP3A	Z	-30.365	6
60	MP3A	Mx	-.011	6
61	MP3B	X	-17.531	2
62	MP3B	Z	-30.365	2
63	MP3B	Mx	.029	2
64	MP3B	X	-17.531	6
65	MP3B	Z	-30.365	6
66	MP3B	Mx	.029	6
67	MP3C	X	-14.116	2
68	MP3C	Z	-24.45	2
69	MP3C	Mx	-.014	2
70	MP3C	X	-14.116	6
71	MP3C	Z	-24.45	6
72	MP3C	Mx	-.014	6
73	MP3A	X	-17.531	2
74	MP3A	Z	-30.365	2
75	MP3A	Mx	.029	2
76	MP3A	X	-17.531	6
77	MP3A	Z	-30.365	6
78	MP3A	Mx	.029	6
79	MP3B	X	-17.531	2
80	MP3B	Z	-30.365	2
81	MP3B	Mx	-.011	2
82	MP3B	X	-17.531	6
83	MP3B	Z	-30.365	6
84	MP3B	Mx	-.011	6
85	MP3C	X	-14.116	2
86	MP3C	Z	-24.45	2
87	MP3C	Mx	-.014	2
88	MP3C	X	-14.116	6
89	MP3C	Z	-24.45	6
90	MP3C	Mx	-.014	6
91	MP6A	X	-10.705	2
92	MP6A	Z	-18.542	2
93	MP6A	Mx	0	2
94	MP3A	X	-7.122	4
95	MP3A	Z	-12.335	4
96	MP3A	Mx	-.004	4
97	MP3B	X	-7.122	4
98	MP3B	Z	-12.335	4
99	MP3B	Mx	-.004	4
100	MP3C	X	-5.357	4
101	MP3C	Z	-9.278	4
102	MP3C	Mx	.005	4
103	MP2A	X	-6.898	4
104	MP2A	Z	-11.948	4
105	MP2A	Mx	-.003	4
106	MP2B	X	-6.898	4
107	MP2B	Z	-11.948	4

**Member Point Loads (BLC 26 : Antenna Wi (330 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	-0.003	4
109	MP2C	X	-4.463	4
110	MP2C	Z	-7.73	4
111	MP2C	Mx	.004	4
112	MP1A	X	-2.976	0
113	MP1A	Z	-5.155	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 27 : Antenna Wm (0 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	0	3
2	MP4A	Z	-5.86	3
3	MP4A	Mx	0	3
4	MP4A	X	0	5
5	MP4A	Z	-5.86	5
6	MP4A	Mx	0	5
7	MP4B	X	0	3
8	MP4B	Z	-3.186	3
9	MP4B	Mx	.002	3
10	MP4B	X	0	5
11	MP4B	Z	-3.186	5
12	MP4B	Mx	.002	5
13	MP4C	X	0	3
14	MP4C	Z	-3.186	3
15	MP4C	Mx	-.002	3
16	MP4C	X	0	5
17	MP4C	Z	-3.186	5
18	MP4C	Mx	-.002	5
19	MP2A	X	0	2
20	MP2A	Z	-7.877	2
21	MP2A	Mx	-.006	2
22	MP2A	X	0	6
23	MP2A	Z	-7.877	6
24	MP2A	Mx	-.006	6
25	MP2B	X	0	2
26	MP2B	Z	-7.877	2
27	MP2B	Mx	.006	2
28	MP2B	X	0	6
29	MP2B	Z	-7.877	6
30	MP2B	Mx	.006	6
31	MP2C	X	0	2
32	MP2C	Z	-8.756	2
33	MP2C	Mx	-.001	2
34	MP2C	X	0	6
35	MP2C	Z	-8.756	6
36	MP2C	Mx	-.001	6
37	MP5A	X	0	2
38	MP5A	Z	-7.877	2
39	MP5A	Mx	-.006	2
40	MP5A	X	0	6
41	MP5A	Z	-7.877	6
42	MP5A	Mx	-.006	6
43	MP5B	X	0	2
44	MP5B	Z	-7.877	2
45	MP5B	Mx	.006	2
46	MP5B	X	0	6
47	MP5B	Z	-7.877	6
48	MP5B	Mx	.006	6



**Member Point Loads (BLC 27 : Antenna Wm (0 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	0	2
50	MP5C	Z	-8.756	2
51	MP5C	Mx	-.001	2
52	MP5C	X	0	6
53	MP5C	Z	-8.756	6
54	MP5C	Mx	-.001	6
55	MP3A	X	0	2
56	MP3A	Z	-12.356	2
57	MP3A	Mx	-.008	2
58	MP3A	X	0	6
59	MP3A	Z	-12.356	6
60	MP3A	Mx	-.008	6
61	MP3B	X	0	2
62	MP3B	Z	-9.978	2
63	MP3B	Mx	.008	2
64	MP3B	X	0	6
65	MP3B	Z	-9.978	6
66	MP3B	Mx	.008	6
67	MP3C	X	0	2
68	MP3C	Z	-9.978	2
69	MP3C	Mx	-.000995	2
70	MP3C	X	0	6
71	MP3C	Z	-9.978	6
72	MP3C	Mx	-.000995	6
73	MP3A	X	0	2
74	MP3A	Z	-12.356	2
75	MP3A	Mx	.008	2
76	MP3A	X	0	6
77	MP3A	Z	-12.356	6
78	MP3A	Mx	.008	6
79	MP3B	X	0	2
80	MP3B	Z	-9.978	2
81	MP3B	Mx	.000995	2
82	MP3B	X	0	6
83	MP3B	Z	-9.978	6
84	MP3B	Mx	.000995	6
85	MP3C	X	0	2
86	MP3C	Z	-9.978	2
87	MP3C	Mx	-.008	2
88	MP3C	X	0	6
89	MP3C	Z	-9.978	6
90	MP3C	Mx	-.008	6
91	MP6A	X	0	2
92	MP6A	Z	-6.352	2
93	MP6A	Mx	0	2
94	MP3A	X	0	4
95	MP3A	Z	-4.663	4
96	MP3A	Mx	0	4
97	MP3B	X	0	4
98	MP3B	Z	-3.503	4
99	MP3B	Mx	-.002	4
100	MP3C	X	0	4
101	MP3C	Z	-3.503	4
102	MP3C	Mx	.002	4
103	MP2A	X	0	4
104	MP2A	Z	-4.663	4
105	MP2A	Mx	0	4
106	MP2B	X	0	4
107	MP2B	Z	-3.059	4



**Member Point Loads (BLC 27 : Antenna Wm (0 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	-.001	4
109	MP2C	X	0	4
110	MP2C	Z	-3.059	4
111	MP2C	Mx	.001	4
112	MP1A	X	0	0
113	MP1A	Z	-1.526	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 28 : Antenna Wm (30 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	2.484	3
2	MP4A	Z	-4.303	3
3	MP4A	Mx	-.002	3
4	MP4A	X	2.484	5
5	MP4A	Z	-4.303	5
6	MP4A	Mx	-.002	5
7	MP4B	X	1.147	3
8	MP4B	Z	-1.987	3
9	MP4B	Mx	.002	3
10	MP4B	X	1.147	5
11	MP4B	Z	-1.987	5
12	MP4B	Mx	.002	5
13	MP4C	X	2.484	3
14	MP4C	Z	-4.303	3
15	MP4C	Mx	-.002	3
16	MP4C	X	2.484	5
17	MP4C	Z	-4.303	5
18	MP4C	Mx	-.002	5
19	MP2A	X	3.843	2
20	MP2A	Z	-6.657	2
21	MP2A	Mx	-.006	2
22	MP2A	X	3.843	6
23	MP2A	Z	-6.657	6
24	MP2A	Mx	-.006	6
25	MP2B	X	4.212	2
26	MP2B	Z	-7.295	2
27	MP2B	Mx	.004	2
28	MP2B	X	4.212	6
29	MP2B	Z	-7.295	6
30	MP2B	Mx	.004	6
31	MP2C	X	4.33	2
32	MP2C	Z	-7.5	2
33	MP2C	Mx	.002	2
34	MP2C	X	4.33	6
35	MP2C	Z	-7.5	6
36	MP2C	Mx	.002	6
37	MP5A	X	3.843	2
38	MP5A	Z	-6.657	2
39	MP5A	Mx	-.006	2
40	MP5A	X	3.843	6
41	MP5A	Z	-6.657	6
42	MP5A	Mx	-.006	6
43	MP5B	X	4.212	2
44	MP5B	Z	-7.295	2
45	MP5B	Mx	.004	2
46	MP5B	X	4.212	6
47	MP5B	Z	-7.295	6
48	MP5B	Mx	.004	6

**Member Point Loads (BLC 28 : Antenna Wm (30 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	4.33	2
50	MP5C	Z	-7.5	2
51	MP5C	Mx	.002	2
52	MP5C	X	4.33	6
53	MP5C	Z	-7.5	6
54	MP5C	Mx	.002	6
55	MP3A	X	5.782	2
56	MP3A	Z	-10.014	2
57	MP3A	Mx	-.01	2
58	MP3A	X	5.782	6
59	MP3A	Z	-10.014	6
60	MP3A	Mx	-.01	6
61	MP3B	X	4.593	2
62	MP3B	Z	-7.955	2
63	MP3B	Mx	.005	2
64	MP3B	X	4.593	6
65	MP3B	Z	-7.955	6
66	MP3B	Mx	.005	6
67	MP3C	X	5.782	2
68	MP3C	Z	-10.014	2
69	MP3C	Mx	.004	2
70	MP3C	X	5.782	6
71	MP3C	Z	-10.014	6
72	MP3C	Mx	.004	6
73	MP3A	X	5.782	2
74	MP3A	Z	-10.014	2
75	MP3A	Mx	.004	2
76	MP3A	X	5.782	6
77	MP3A	Z	-10.014	6
78	MP3A	Mx	.004	6
79	MP3B	X	4.593	2
80	MP3B	Z	-7.955	2
81	MP3B	Mx	.005	2
82	MP3B	X	4.593	6
83	MP3B	Z	-7.955	6
84	MP3B	Mx	.005	6
85	MP3C	X	5.782	2
86	MP3C	Z	-10.014	2
87	MP3C	Mx	-.01	2
88	MP3C	X	5.782	6
89	MP3C	Z	-10.014	6
90	MP3C	Mx	-.01	6
91	MP6A	X	3.788	2
92	MP6A	Z	-6.561	2
93	MP6A	Mx	0	2
94	MP3A	X	2.138	4
95	MP3A	Z	-3.704	4
96	MP3A	Mx	.001	4
97	MP3B	X	1.558	4
98	MP3B	Z	-2.699	4
99	MP3B	Mx	-.002	4
100	MP3C	X	2.138	4
101	MP3C	Z	-3.704	4
102	MP3C	Mx	.001	4
103	MP2A	X	2.064	4
104	MP2A	Z	-3.575	4
105	MP2A	Mx	.001	4
106	MP2B	X	1.262	4
107	MP2B	Z	-2.186	4

**Member Point Loads (BLC 28 : Antenna Wm (30 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	-.001	4
109	MP2C	X	2.064	4
110	MP2C	Z	-3.575	4
111	MP2C	Mx	.001	4
112	MP1A	X	.954	0
113	MP1A	Z	-1.653	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 29 : Antenna Wm (60 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	2.759	3
2	MP4A	Z	-1.593	3
3	MP4A	Mx	-.002	3
4	MP4A	X	2.759	5
5	MP4A	Z	-1.593	5
6	MP4A	Mx	-.002	5
7	MP4B	X	2.759	3
8	MP4B	Z	-1.593	3
9	MP4B	Mx	.002	3
10	MP4B	X	2.759	5
11	MP4B	Z	-1.593	5
12	MP4B	Mx	.002	5
13	MP4C	X	5.075	3
14	MP4C	Z	-2.93	3
15	MP4C	Mx	0	3
16	MP4C	X	5.075	5
17	MP4C	Z	-2.93	5
18	MP4C	Mx	0	5
19	MP2A	X	6.966	2
20	MP2A	Z	-4.022	2
21	MP2A	Mx	-.005	2
22	MP2A	X	6.966	6
23	MP2A	Z	-4.022	6
24	MP2A	Mx	-.005	6
25	MP2B	X	7.605	2
26	MP2B	Z	-4.391	2
27	MP2B	Mx	.000638	2
28	MP2B	X	7.605	6
29	MP2B	Z	-4.391	6
30	MP2B	Mx	.000638	6
31	MP2C	X	7.047	2
32	MP2C	Z	-4.069	2
33	MP2C	Mx	.005	2
34	MP2C	X	7.047	6
35	MP2C	Z	-4.069	6
36	MP2C	Mx	.005	6
37	MP5A	X	6.966	2
38	MP5A	Z	-4.022	2
39	MP5A	Mx	-.005	2
40	MP5A	X	6.966	6
41	MP5A	Z	-4.022	6
42	MP5A	Mx	-.005	6
43	MP5B	X	7.605	2
44	MP5B	Z	-4.391	2
45	MP5B	Mx	.000638	2
46	MP5B	X	7.605	6
47	MP5B	Z	-4.391	6
48	MP5B	Mx	.000638	6

**Member Point Loads (BLC 29 : Antenna Wm (60 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	7.047	2
50	MP5C	Z	-4.069	2
51	MP5C	Mx	.005	2
52	MP5C	X	7.047	6
53	MP5C	Z	-4.069	6
54	MP5C	Mx	.005	6
55	MP3A	X	8.642	2
56	MP3A	Z	-4.989	2
57	MP3A	Mx	-.008	2
58	MP3A	X	8.642	6
59	MP3A	Z	-4.989	6
60	MP3A	Mx	-.008	6
61	MP3B	X	8.642	2
62	MP3B	Z	-4.989	2
63	MP3B	Mx	.000994	2
64	MP3B	X	8.642	6
65	MP3B	Z	-4.989	6
66	MP3B	Mx	.000994	6
67	MP3C	X	10.7	2
68	MP3C	Z	-6.178	2
69	MP3C	Mx	.008	2
70	MP3C	X	10.7	6
71	MP3C	Z	-6.178	6
72	MP3C	Mx	.008	6
73	MP3A	X	8.642	2
74	MP3A	Z	-4.989	2
75	MP3A	Mx	-.000995	2
76	MP3A	X	8.642	6
77	MP3A	Z	-4.989	6
78	MP3A	Mx	-.000995	6
79	MP3B	X	8.642	2
80	MP3B	Z	-4.989	2
81	MP3B	Mx	.008	2
82	MP3B	X	8.642	6
83	MP3B	Z	-4.989	6
84	MP3B	Mx	.008	6
85	MP3C	X	10.7	2
86	MP3C	Z	-6.178	2
87	MP3C	Mx	-.008	2
88	MP3C	X	10.7	6
89	MP3C	Z	-6.178	6
90	MP3C	Mx	-.008	6
91	MP6A	X	7.861	2
92	MP6A	Z	-4.538	2
93	MP6A	Mx	0	2
94	MP3A	X	3.034	4
95	MP3A	Z	-1.752	4
96	MP3A	Mx	.002	4
97	MP3B	X	3.034	4
98	MP3B	Z	-1.752	4
99	MP3B	Mx	-.002	4
100	MP3C	X	4.038	4
101	MP3C	Z	-2.331	4
102	MP3C	Mx	0	4
103	MP2A	X	2.649	4
104	MP2A	Z	-1.53	4
105	MP2A	Mx	.001	4
106	MP2B	X	2.649	4
107	MP2B	Z	-1.53	4

**Member Point Loads (BLC 29 : Antenna Wm (60 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
108	MP2B	Mx	-0.001	4
109	MP2C	X	4.038	4
110	MP2C	Z	-2.331	4
111	MP2C	Mx	0	4
112	MP1A	X	2.058	0
113	MP1A	Z	-1.188	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 30 : Antenna Wm (90 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
1	MP4A	X	2.294	3
2	MP4A	Z	0	3
3	MP4A	Mx	-0.002	3
4	MP4A	X	2.294	5
5	MP4A	Z	0	5
6	MP4A	Mx	-0.002	5
7	MP4B	X	4.968	3
8	MP4B	Z	0	3
9	MP4B	Mx	.002	3
10	MP4B	X	4.968	5
11	MP4B	Z	0	5
12	MP4B	Mx	.002	5
13	MP4C	X	4.968	3
14	MP4C	Z	0	3
15	MP4C	Mx	.002	3
16	MP4C	X	4.968	5
17	MP4C	Z	0	5
18	MP4C	Mx	.002	5
19	MP2A	X	8.591	2
20	MP2A	Z	0	2
21	MP2A	Mx	-0.003	2
22	MP2A	X	8.591	6
23	MP2A	Z	0	6
24	MP2A	Mx	-0.003	6
25	MP2B	X	8.591	2
26	MP2B	Z	0	2
27	MP2B	Mx	-0.003	2
28	MP2B	X	8.591	6
29	MP2B	Z	0	6
30	MP2B	Mx	-0.003	6
31	MP2C	X	7.712	2
32	MP2C	Z	0	2
33	MP2C	Mx	.006	2
34	MP2C	X	7.712	6
35	MP2C	Z	0	6
36	MP2C	Mx	.006	6
37	MP5A	X	8.591	2
38	MP5A	Z	0	2
39	MP5A	Mx	-0.003	2
40	MP5A	X	8.591	6
41	MP5A	Z	0	6
42	MP5A	Mx	-0.003	6
43	MP5B	X	8.591	2
44	MP5B	Z	0	2
45	MP5B	Mx	-0.003	2
46	MP5B	X	8.591	6
47	MP5B	Z	0	6
48	MP5B	Mx	-0.003	6



**Member Point Loads (BLC 30 : Antenna Wm (90 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	7.712	2
50	MP5C	Z	0	2
51	MP5C	Mx	.006	2
52	MP5C	X	7.712	6
53	MP5C	Z	0	6
54	MP5C	Mx	.006	6
55	MP3A	X	9.186	2
56	MP3A	Z	0	2
57	MP3A	Mx	-.005	2
58	MP3A	X	9.186	6
59	MP3A	Z	0	6
60	MP3A	Mx	-.005	6
61	MP3B	X	11.563	2
62	MP3B	Z	0	2
63	MP3B	Mx	-.004	2
64	MP3B	X	11.563	6
65	MP3B	Z	0	6
66	MP3B	Mx	-.004	6
67	MP3C	X	11.563	2
68	MP3C	Z	0	2
69	MP3C	Mx	.01	2
70	MP3C	X	11.563	6
71	MP3C	Z	0	6
72	MP3C	Mx	.01	6
73	MP3A	X	9.186	2
74	MP3A	Z	0	2
75	MP3A	Mx	-.005	2
76	MP3A	X	9.186	6
77	MP3A	Z	0	6
78	MP3A	Mx	-.005	6
79	MP3B	X	11.563	2
80	MP3B	Z	0	2
81	MP3B	Mx	.01	2
82	MP3B	X	11.563	6
83	MP3B	Z	0	6
84	MP3B	Mx	.01	6
85	MP3C	X	11.563	2
86	MP3C	Z	0	2
87	MP3C	Mx	-.004	2
88	MP3C	X	11.563	6
89	MP3C	Z	0	6
90	MP3C	Mx	-.004	6
91	MP6A	X	9.354	2
92	MP6A	Z	0	2
93	MP6A	Mx	0	2
94	MP3A	X	3.117	4
95	MP3A	Z	0	4
96	MP3A	Mx	.002	4
97	MP3B	X	4.276	4
98	MP3B	Z	0	4
99	MP3B	Mx	-.001	4
100	MP3C	X	4.276	4
101	MP3C	Z	0	4
102	MP3C	Mx	-.001	4
103	MP2A	X	2.525	4
104	MP2A	Z	0	4
105	MP2A	Mx	.001	4
106	MP2B	X	4.128	4
107	MP2B	Z	0	4



**Member Point Loads (BLC 30 : Antenna Wm (90 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	-.001	4
109	MP2C	X	4.128	4
110	MP2C	Z	0	4
111	MP2C	Mx	-.001	4
112	MP1A	X	2.463	0
113	MP1A	Z	0	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 31 : Antenna Wm (120 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	2.759	3
2	MP4A	Z	1.593	3
3	MP4A	Mx	-.002	3
4	MP4A	X	2.759	5
5	MP4A	Z	1.593	5
6	MP4A	Mx	-.002	5
7	MP4B	X	5.075	3
8	MP4B	Z	2.93	3
9	MP4B	Mx	0	3
10	MP4B	X	5.075	5
11	MP4B	Z	2.93	5
12	MP4B	Mx	0	5
13	MP4C	X	2.759	3
14	MP4C	Z	1.593	3
15	MP4C	Mx	.002	3
16	MP4C	X	2.759	5
17	MP4C	Z	1.593	5
18	MP4C	Mx	.002	5
19	MP2A	X	7.605	2
20	MP2A	Z	4.391	2
21	MP2A	Mx	.000638	2
22	MP2A	X	7.605	6
23	MP2A	Z	4.391	6
24	MP2A	Mx	.000638	6
25	MP2B	X	6.966	2
26	MP2B	Z	4.022	2
27	MP2B	Mx	-.005	2
28	MP2B	X	6.966	6
29	MP2B	Z	4.022	6
30	MP2B	Mx	-.005	6
31	MP2C	X	6.762	2
32	MP2C	Z	3.904	2
33	MP2C	Mx	.006	2
34	MP2C	X	6.762	6
35	MP2C	Z	3.904	6
36	MP2C	Mx	.006	6
37	MP5A	X	7.605	2
38	MP5A	Z	4.391	2
39	MP5A	Mx	.000638	2
40	MP5A	X	7.605	6
41	MP5A	Z	4.391	6
42	MP5A	Mx	.000638	6
43	MP5B	X	6.966	2
44	MP5B	Z	4.022	2
45	MP5B	Mx	-.005	2
46	MP5B	X	6.966	6
47	MP5B	Z	4.022	6
48	MP5B	Mx	-.005	6



**Member Point Loads (BLC 31 : Antenna Wm (120 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	6.762	2
50	MP5C	Z	3.904	2
51	MP5C	Mx	.006	2
52	MP5C	X	6.762	6
53	MP5C	Z	3.904	6
54	MP5C	Mx	.006	6
55	MP3A	X	8.642	2
56	MP3A	Z	4.989	2
57	MP3A	Mx	-.000995	2
58	MP3A	X	8.642	6
59	MP3A	Z	4.989	6
60	MP3A	Mx	-.000995	6
61	MP3B	X	10.7	2
62	MP3B	Z	6.178	2
63	MP3B	Mx	-.008	2
64	MP3B	X	10.7	6
65	MP3B	Z	6.178	6
66	MP3B	Mx	-.008	6
67	MP3C	X	8.642	2
68	MP3C	Z	4.989	2
69	MP3C	Mx	.008	2
70	MP3C	X	8.642	6
71	MP3C	Z	4.989	6
72	MP3C	Mx	.008	6
73	MP3A	X	8.642	2
74	MP3A	Z	4.989	2
75	MP3A	Mx	-.008	2
76	MP3A	X	8.642	6
77	MP3A	Z	4.989	6
78	MP3A	Mx	-.008	6
79	MP3B	X	10.7	2
80	MP3B	Z	6.178	2
81	MP3B	Mx	.008	2
82	MP3B	X	10.7	6
83	MP3B	Z	6.178	6
84	MP3B	Mx	.008	6
85	MP3C	X	8.642	2
86	MP3C	Z	4.989	2
87	MP3C	Mx	.000994	2
88	MP3C	X	8.642	6
89	MP3C	Z	4.989	6
90	MP3C	Mx	.000994	6
91	MP6A	X	7.041	2
92	MP6A	Z	4.065	2
93	MP6A	Mx	0	2
94	MP3A	X	3.034	4
95	MP3A	Z	1.752	4
96	MP3A	Mx	.002	4
97	MP3B	X	4.038	4
98	MP3B	Z	2.331	4
99	MP3B	Mx	0	4
100	MP3C	X	3.034	4
101	MP3C	Z	1.752	4
102	MP3C	Mx	-.002	4
103	MP2A	X	2.649	4
104	MP2A	Z	1.53	4
105	MP2A	Mx	.001	4
106	MP2B	X	4.038	4
107	MP2B	Z	2.331	4



**Member Point Loads (BLC 31 : Antenna Wm (120 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	0	4
109	MP2C	X	2.649	4
110	MP2C	Z	1.53	4
111	MP2C	Mx	-.001	4
112	MP1A	X	1.803	0
113	MP1A	Z	1.041	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 32 : Antenna Wm (150 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	2.484	3
2	MP4A	Z	4.303	3
3	MP4A	Mx	-.002	3
4	MP4A	X	2.484	5
5	MP4A	Z	4.303	5
6	MP4A	Mx	-.002	5
7	MP4B	X	2.484	3
8	MP4B	Z	4.303	3
9	MP4B	Mx	-.002	3
10	MP4B	X	2.484	5
11	MP4B	Z	4.303	5
12	MP4B	Mx	-.002	5
13	MP4C	X	1.147	3
14	MP4C	Z	1.987	3
15	MP4C	Mx	.002	3
16	MP4C	X	1.147	5
17	MP4C	Z	1.987	5
18	MP4C	Mx	.002	5
19	MP2A	X	4.212	2
20	MP2A	Z	7.295	2
21	MP2A	Mx	.004	2
22	MP2A	X	4.212	6
23	MP2A	Z	7.295	6
24	MP2A	Mx	.004	6
25	MP2B	X	3.843	2
26	MP2B	Z	6.657	2
27	MP2B	Mx	-.006	2
28	MP2B	X	3.843	6
29	MP2B	Z	6.657	6
30	MP2B	Mx	-.006	6
31	MP2C	X	4.165	2
32	MP2C	Z	7.214	2
33	MP2C	Mx	.004	2
34	MP2C	X	4.165	6
35	MP2C	Z	7.214	6
36	MP2C	Mx	.004	6
37	MP5A	X	4.212	2
38	MP5A	Z	7.295	2
39	MP5A	Mx	.004	2
40	MP5A	X	4.212	6
41	MP5A	Z	7.295	6
42	MP5A	Mx	.004	6
43	MP5B	X	3.843	2
44	MP5B	Z	6.657	2
45	MP5B	Mx	-.006	2
46	MP5B	X	3.843	6
47	MP5B	Z	6.657	6
48	MP5B	Mx	-.006	6



**Member Point Loads (BLC 32 : Antenna Wm (150 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	4.165	2
50	MP5C	Z	7.214	2
51	MP5C	Mx	.004	2
52	MP5C	X	4.165	6
53	MP5C	Z	7.214	6
54	MP5C	Mx	.004	6
55	MP3A	X	5.782	2
56	MP3A	Z	10.014	2
57	MP3A	Mx	.004	2
58	MP3A	X	5.782	6
59	MP3A	Z	10.014	6
60	MP3A	Mx	.004	6
61	MP3B	X	5.782	2
62	MP3B	Z	10.014	2
63	MP3B	Mx	-.01	2
64	MP3B	X	5.782	6
65	MP3B	Z	10.014	6
66	MP3B	Mx	-.01	6
67	MP3C	X	4.593	2
68	MP3C	Z	7.955	2
69	MP3C	Mx	.005	2
70	MP3C	X	4.593	6
71	MP3C	Z	7.955	6
72	MP3C	Mx	.005	6
73	MP3A	X	5.782	2
74	MP3A	Z	10.014	2
75	MP3A	Mx	-.01	2
76	MP3A	X	5.782	6
77	MP3A	Z	10.014	6
78	MP3A	Mx	-.01	6
79	MP3B	X	5.782	2
80	MP3B	Z	10.014	2
81	MP3B	Mx	.004	2
82	MP3B	X	5.782	6
83	MP3B	Z	10.014	6
84	MP3B	Mx	.004	6
85	MP3C	X	4.593	2
86	MP3C	Z	7.955	2
87	MP3C	Mx	.005	2
88	MP3C	X	4.593	6
89	MP3C	Z	7.955	6
90	MP3C	Mx	.005	6
91	MP6A	X	3.315	2
92	MP6A	Z	5.741	2
93	MP6A	Mx	0	2
94	MP3A	X	2.138	4
95	MP3A	Z	3.704	4
96	MP3A	Mx	.001	4
97	MP3B	X	2.138	4
98	MP3B	Z	3.704	4
99	MP3B	Mx	.001	4
100	MP3C	X	1.558	4
101	MP3C	Z	2.699	4
102	MP3C	Mx	-.002	4
103	MP2A	X	2.064	4
104	MP2A	Z	3.575	4
105	MP2A	Mx	.001	4
106	MP2B	X	2.064	4
107	MP2B	Z	3.575	4

**Member Point Loads (BLC 32 : Antenna Wm (150 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	.001	4
109	MP2C	X	1.262	4
110	MP2C	Z	2.186	4
111	MP2C	Mx	-.001	4
112	MP1A	X	.806	0
113	MP1A	Z	1.397	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 33 : Antenna Wm (180 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	0	3
2	MP4A	Z	5.86	3
3	MP4A	Mx	0	3
4	MP4A	X	0	5
5	MP4A	Z	5.86	5
6	MP4A	Mx	0	5
7	MP4B	X	0	3
8	MP4B	Z	3.186	3
9	MP4B	Mx	-.002	3
10	MP4B	X	0	5
11	MP4B	Z	3.186	5
12	MP4B	Mx	-.002	5
13	MP4C	X	0	3
14	MP4C	Z	3.186	3
15	MP4C	Mx	.002	3
16	MP4C	X	0	5
17	MP4C	Z	3.186	5
18	MP4C	Mx	.002	5
19	MP2A	X	0	2
20	MP2A	Z	7.877	2
21	MP2A	Mx	.006	2
22	MP2A	X	0	6
23	MP2A	Z	7.877	6
24	MP2A	Mx	.006	6
25	MP2B	X	0	2
26	MP2B	Z	7.877	2
27	MP2B	Mx	-.006	2
28	MP2B	X	0	6
29	MP2B	Z	7.877	6
30	MP2B	Mx	-.006	6
31	MP2C	X	0	2
32	MP2C	Z	8.756	2
33	MP2C	Mx	.001	2
34	MP2C	X	0	6
35	MP2C	Z	8.756	6
36	MP2C	Mx	.001	6
37	MP5A	X	0	2
38	MP5A	Z	7.877	2
39	MP5A	Mx	.006	2
40	MP5A	X	0	6
41	MP5A	Z	7.877	6
42	MP5A	Mx	.006	6
43	MP5B	X	0	2
44	MP5B	Z	7.877	2
45	MP5B	Mx	-.006	2
46	MP5B	X	0	6
47	MP5B	Z	7.877	6
48	MP5B	Mx	-.006	6



**Member Point Loads (BLC 33 : Antenna Wm (180 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	0	2
50	MP5C	Z	8.756	2
51	MP5C	Mx	.001	2
52	MP5C	X	0	6
53	MP5C	Z	8.756	6
54	MP5C	Mx	.001	6
55	MP3A	X	0	2
56	MP3A	Z	12.356	2
57	MP3A	Mx	.008	2
58	MP3A	X	0	6
59	MP3A	Z	12.356	6
60	MP3A	Mx	.008	6
61	MP3B	X	0	2
62	MP3B	Z	9.978	2
63	MP3B	Mx	-.008	2
64	MP3B	X	0	6
65	MP3B	Z	9.978	6
66	MP3B	Mx	-.008	6
67	MP3C	X	0	2
68	MP3C	Z	9.978	2
69	MP3C	Mx	.000995	2
70	MP3C	X	0	6
71	MP3C	Z	9.978	6
72	MP3C	Mx	.000995	6
73	MP3A	X	0	2
74	MP3A	Z	12.356	2
75	MP3A	Mx	-.008	2
76	MP3A	X	0	6
77	MP3A	Z	12.356	6
78	MP3A	Mx	-.008	6
79	MP3B	X	0	2
80	MP3B	Z	9.978	2
81	MP3B	Mx	-.000995	2
82	MP3B	X	0	6
83	MP3B	Z	9.978	6
84	MP3B	Mx	-.000995	6
85	MP3C	X	0	2
86	MP3C	Z	9.978	2
87	MP3C	Mx	.008	2
88	MP3C	X	0	6
89	MP3C	Z	9.978	6
90	MP3C	Mx	.008	6
91	MP6A	X	0	2
92	MP6A	Z	6.352	2
93	MP6A	Mx	0	2
94	MP3A	X	0	4
95	MP3A	Z	4.663	4
96	MP3A	Mx	0	4
97	MP3B	X	0	4
98	MP3B	Z	3.503	4
99	MP3B	Mx	.002	4
100	MP3C	X	0	4
101	MP3C	Z	3.503	4
102	MP3C	Mx	-.002	4
103	MP2A	X	0	4
104	MP2A	Z	4.663	4
105	MP2A	Mx	0	4
106	MP2B	X	0	4
107	MP2B	Z	3.059	4



**Member Point Loads (BLC 33 : Antenna Wm (180 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
108	MP2B	Mx	.001	4
109	MP2C	X	0	4
110	MP2C	Z	3.059	4
111	MP2C	Mx	-.001	4
112	MP1A	X	0	0
113	MP1A	Z	1.526	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 34 : Antenna Wm (210 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
1	MP4A	X	-2.484	3
2	MP4A	Z	4.303	3
3	MP4A	Mx	.002	3
4	MP4A	X	-2.484	5
5	MP4A	Z	4.303	5
6	MP4A	Mx	.002	5
7	MP4B	X	-1.147	3
8	MP4B	Z	1.987	3
9	MP4B	Mx	-.002	3
10	MP4B	X	-1.147	5
11	MP4B	Z	1.987	5
12	MP4B	Mx	-.002	5
13	MP4C	X	-2.484	3
14	MP4C	Z	4.303	3
15	MP4C	Mx	.002	3
16	MP4C	X	-2.484	5
17	MP4C	Z	4.303	5
18	MP4C	Mx	.002	5
19	MP2A	X	-3.843	2
20	MP2A	Z	6.657	2
21	MP2A	Mx	.006	2
22	MP2A	X	-3.843	6
23	MP2A	Z	6.657	6
24	MP2A	Mx	.006	6
25	MP2B	X	-4.212	2
26	MP2B	Z	7.295	2
27	MP2B	Mx	-.004	2
28	MP2B	X	-4.212	6
29	MP2B	Z	7.295	6
30	MP2B	Mx	-.004	6
31	MP2C	X	-4.33	2
32	MP2C	Z	7.5	2
33	MP2C	Mx	-.002	2
34	MP2C	X	-4.33	6
35	MP2C	Z	7.5	6
36	MP2C	Mx	-.002	6
37	MP5A	X	-3.843	2
38	MP5A	Z	6.657	2
39	MP5A	Mx	.006	2
40	MP5A	X	-3.843	6
41	MP5A	Z	6.657	6
42	MP5A	Mx	.006	6
43	MP5B	X	-4.212	2
44	MP5B	Z	7.295	2
45	MP5B	Mx	-.004	2
46	MP5B	X	-4.212	6
47	MP5B	Z	7.295	6
48	MP5B	Mx	-.004	6

**Member Point Loads (BLC 34 : Antenna Wm (210 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	-4.33	2
50	MP5C	Z	7.5	2
51	MP5C	Mx	-.002	2
52	MP5C	X	-4.33	6
53	MP5C	Z	7.5	6
54	MP5C	Mx	-.002	6
55	MP3A	X	-5.782	2
56	MP3A	Z	10.014	2
57	MP3A	Mx	.01	2
58	MP3A	X	-5.782	6
59	MP3A	Z	10.014	6
60	MP3A	Mx	.01	6
61	MP3B	X	-4.593	2
62	MP3B	Z	7.955	2
63	MP3B	Mx	-.005	2
64	MP3B	X	-4.593	6
65	MP3B	Z	7.955	6
66	MP3B	Mx	-.005	6
67	MP3C	X	-5.782	2
68	MP3C	Z	10.014	2
69	MP3C	Mx	-.004	2
70	MP3C	X	-5.782	6
71	MP3C	Z	10.014	6
72	MP3C	Mx	-.004	6
73	MP3A	X	-5.782	2
74	MP3A	Z	10.014	2
75	MP3A	Mx	-.004	2
76	MP3A	X	-5.782	6
77	MP3A	Z	10.014	6
78	MP3A	Mx	-.004	6
79	MP3B	X	-4.593	2
80	MP3B	Z	7.955	2
81	MP3B	Mx	-.005	2
82	MP3B	X	-4.593	6
83	MP3B	Z	7.955	6
84	MP3B	Mx	-.005	6
85	MP3C	X	-5.782	2
86	MP3C	Z	10.014	2
87	MP3C	Mx	.01	2
88	MP3C	X	-5.782	6
89	MP3C	Z	10.014	6
90	MP3C	Mx	.01	6
91	MP6A	X	-3.788	2
92	MP6A	Z	6.561	2
93	MP6A	Mx	0	2
94	MP3A	X	-2.138	4
95	MP3A	Z	3.704	4
96	MP3A	Mx	-.001	4
97	MP3B	X	-1.558	4
98	MP3B	Z	2.699	4
99	MP3B	Mx	.002	4
100	MP3C	X	-2.138	4
101	MP3C	Z	3.704	4
102	MP3C	Mx	-.001	4
103	MP2A	X	-2.064	4
104	MP2A	Z	3.575	4
105	MP2A	Mx	-.001	4
106	MP2B	X	-1.262	4
107	MP2B	Z	2.186	4

**Member Point Loads (BLC 34 : Antenna Wm (210 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
108	MP2B	Mx	.001	4
109	MP2C	X	-2.064	4
110	MP2C	Z	3.575	4
111	MP2C	Mx	-.001	4
112	MP1A	X	-.954	0
113	MP1A	Z	1.653	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 35 : Antenna Wm (240 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
1	MP4A	X	-2.759	3
2	MP4A	Z	1.593	3
3	MP4A	Mx	.002	3
4	MP4A	X	-2.759	5
5	MP4A	Z	1.593	5
6	MP4A	Mx	.002	5
7	MP4B	X	-2.759	3
8	MP4B	Z	1.593	3
9	MP4B	Mx	-.002	3
10	MP4B	X	-2.759	5
11	MP4B	Z	1.593	5
12	MP4B	Mx	-.002	5
13	MP4C	X	-5.075	3
14	MP4C	Z	2.93	3
15	MP4C	Mx	0	3
16	MP4C	X	-5.075	5
17	MP4C	Z	2.93	5
18	MP4C	Mx	0	5
19	MP2A	X	-6.966	2
20	MP2A	Z	4.022	2
21	MP2A	Mx	.005	2
22	MP2A	X	-6.966	6
23	MP2A	Z	4.022	6
24	MP2A	Mx	.005	6
25	MP2B	X	-7.605	2
26	MP2B	Z	4.391	2
27	MP2B	Mx	-.000638	2
28	MP2B	X	-7.605	6
29	MP2B	Z	4.391	6
30	MP2B	Mx	-.000638	6
31	MP2C	X	-7.047	2
32	MP2C	Z	4.069	2
33	MP2C	Mx	-.005	2
34	MP2C	X	-7.047	6
35	MP2C	Z	4.069	6
36	MP2C	Mx	-.005	6
37	MP5A	X	-6.966	2
38	MP5A	Z	4.022	2
39	MP5A	Mx	.005	2
40	MP5A	X	-6.966	6
41	MP5A	Z	4.022	6
42	MP5A	Mx	.005	6
43	MP5B	X	-7.605	2
44	MP5B	Z	4.391	2
45	MP5B	Mx	-.000638	2
46	MP5B	X	-7.605	6
47	MP5B	Z	4.391	6
48	MP5B	Mx	-.000638	6



**Member Point Loads (BLC 35 : Antenna Wm (240 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	-7.047	2
50	MP5C	Z	4.069	2
51	MP5C	Mx	-.005	2
52	MP5C	X	-7.047	6
53	MP5C	Z	4.069	6
54	MP5C	Mx	-.005	6
55	MP3A	X	-8.642	2
56	MP3A	Z	4.989	2
57	MP3A	Mx	.008	2
58	MP3A	X	-8.642	6
59	MP3A	Z	4.989	6
60	MP3A	Mx	.008	6
61	MP3B	X	-8.642	2
62	MP3B	Z	4.989	2
63	MP3B	Mx	-.000994	2
64	MP3B	X	-8.642	6
65	MP3B	Z	4.989	6
66	MP3B	Mx	-.000994	6
67	MP3C	X	-10.7	2
68	MP3C	Z	6.178	2
69	MP3C	Mx	-.008	2
70	MP3C	X	-10.7	6
71	MP3C	Z	6.178	6
72	MP3C	Mx	-.008	6
73	MP3A	X	-8.642	2
74	MP3A	Z	4.989	2
75	MP3A	Mx	.000995	2
76	MP3A	X	-8.642	6
77	MP3A	Z	4.989	6
78	MP3A	Mx	.000995	6
79	MP3B	X	-8.642	2
80	MP3B	Z	4.989	2
81	MP3B	Mx	-.008	2
82	MP3B	X	-8.642	6
83	MP3B	Z	4.989	6
84	MP3B	Mx	-.008	6
85	MP3C	X	-10.7	2
86	MP3C	Z	6.178	2
87	MP3C	Mx	.008	2
88	MP3C	X	-10.7	6
89	MP3C	Z	6.178	6
90	MP3C	Mx	.008	6
91	MP6A	X	-7.861	2
92	MP6A	Z	4.538	2
93	MP6A	Mx	0	2
94	MP3A	X	-3.034	4
95	MP3A	Z	1.752	4
96	MP3A	Mx	-.002	4
97	MP3B	X	-3.034	4
98	MP3B	Z	1.752	4
99	MP3B	Mx	.002	4
100	MP3C	X	-4.038	4
101	MP3C	Z	2.331	4
102	MP3C	Mx	0	4
103	MP2A	X	-2.649	4
104	MP2A	Z	1.53	4
105	MP2A	Mx	-.001	4
106	MP2B	X	-2.649	4
107	MP2B	Z	1.53	4

**Member Point Loads (BLC 35 : Antenna Wm (240 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	.001	4
109	MP2C	X	-4.038	4
110	MP2C	Z	2.331	4
111	MP2C	Mx	0	4
112	MP1A	X	-2.058	0
113	MP1A	Z	1.188	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 36 : Antenna Wm (270 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	-2.294	3
2	MP4A	Z	0	3
3	MP4A	Mx	.002	3
4	MP4A	X	-2.294	5
5	MP4A	Z	0	5
6	MP4A	Mx	.002	5
7	MP4B	X	-4.968	3
8	MP4B	Z	0	3
9	MP4B	Mx	-.002	3
10	MP4B	X	-4.968	5
11	MP4B	Z	0	5
12	MP4B	Mx	-.002	5
13	MP4C	X	-4.968	3
14	MP4C	Z	0	3
15	MP4C	Mx	-.002	3
16	MP4C	X	-4.968	5
17	MP4C	Z	0	5
18	MP4C	Mx	-.002	5
19	MP2A	X	-8.591	2
20	MP2A	Z	0	2
21	MP2A	Mx	.003	2
22	MP2A	X	-8.591	6
23	MP2A	Z	0	6
24	MP2A	Mx	.003	6
25	MP2B	X	-8.591	2
26	MP2B	Z	0	2
27	MP2B	Mx	.003	2
28	MP2B	X	-8.591	6
29	MP2B	Z	0	6
30	MP2B	Mx	.003	6
31	MP2C	X	-7.712	2
32	MP2C	Z	0	2
33	MP2C	Mx	-.006	2
34	MP2C	X	-7.712	6
35	MP2C	Z	0	6
36	MP2C	Mx	-.006	6
37	MP5A	X	-8.591	2
38	MP5A	Z	0	2
39	MP5A	Mx	.003	2
40	MP5A	X	-8.591	6
41	MP5A	Z	0	6
42	MP5A	Mx	.003	6
43	MP5B	X	-8.591	2
44	MP5B	Z	0	2
45	MP5B	Mx	.003	2
46	MP5B	X	-8.591	6
47	MP5B	Z	0	6
48	MP5B	Mx	.003	6

**Member Point Loads (BLC 36 : Antenna Wm (270 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	-7.712	2
50	MP5C	Z	0	2
51	MP5C	Mx	-.006	2
52	MP5C	X	-7.712	6
53	MP5C	Z	0	6
54	MP5C	Mx	-.006	6
55	MP3A	X	-9.186	2
56	MP3A	Z	0	2
57	MP3A	Mx	.005	2
58	MP3A	X	-9.186	6
59	MP3A	Z	0	6
60	MP3A	Mx	.005	6
61	MP3B	X	-11.563	2
62	MP3B	Z	0	2
63	MP3B	Mx	.004	2
64	MP3B	X	-11.563	6
65	MP3B	Z	0	6
66	MP3B	Mx	.004	6
67	MP3C	X	-11.563	2
68	MP3C	Z	0	2
69	MP3C	Mx	-.01	2
70	MP3C	X	-11.563	6
71	MP3C	Z	0	6
72	MP3C	Mx	-.01	6
73	MP3A	X	-9.186	2
74	MP3A	Z	0	2
75	MP3A	Mx	.005	2
76	MP3A	X	-9.186	6
77	MP3A	Z	0	6
78	MP3A	Mx	.005	6
79	MP3B	X	-11.563	2
80	MP3B	Z	0	2
81	MP3B	Mx	-.01	2
82	MP3B	X	-11.563	6
83	MP3B	Z	0	6
84	MP3B	Mx	-.01	6
85	MP3C	X	-11.563	2
86	MP3C	Z	0	2
87	MP3C	Mx	.004	2
88	MP3C	X	-11.563	6
89	MP3C	Z	0	6
90	MP3C	Mx	.004	6
91	MP6A	X	-9.354	2
92	MP6A	Z	0	2
93	MP6A	Mx	0	2
94	MP3A	X	-3.117	4
95	MP3A	Z	0	4
96	MP3A	Mx	-.002	4
97	MP3B	X	-4.276	4
98	MP3B	Z	0	4
99	MP3B	Mx	.001	4
100	MP3C	X	-4.276	4
101	MP3C	Z	0	4
102	MP3C	Mx	.001	4
103	MP2A	X	-2.525	4
104	MP2A	Z	0	4
105	MP2A	Mx	-.001	4
106	MP2B	X	-4.128	4
107	MP2B	Z	0	4



**Member Point Loads (BLC 36 : Antenna Wm (270 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	.001	4
109	MP2C	X	-4.128	4
110	MP2C	Z	0	4
111	MP2C	Mx	.001	4
112	MP1A	X	-2.463	0
113	MP1A	Z	0	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 37 : Antenna Wm (300 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	-2.759	3
2	MP4A	Z	-1.593	3
3	MP4A	Mx	.002	3
4	MP4A	X	-2.759	5
5	MP4A	Z	-1.593	5
6	MP4A	Mx	.002	5
7	MP4B	X	-5.075	3
8	MP4B	Z	-2.93	3
9	MP4B	Mx	0	3
10	MP4B	X	-5.075	5
11	MP4B	Z	-2.93	5
12	MP4B	Mx	0	5
13	MP4C	X	-2.759	3
14	MP4C	Z	-1.593	3
15	MP4C	Mx	-.002	3
16	MP4C	X	-2.759	5
17	MP4C	Z	-1.593	5
18	MP4C	Mx	-.002	5
19	MP2A	X	-7.605	2
20	MP2A	Z	-4.391	2
21	MP2A	Mx	-.000638	2
22	MP2A	X	-7.605	6
23	MP2A	Z	-4.391	6
24	MP2A	Mx	-.000638	6
25	MP2B	X	-6.966	2
26	MP2B	Z	-4.022	2
27	MP2B	Mx	.005	2
28	MP2B	X	-6.966	6
29	MP2B	Z	-4.022	6
30	MP2B	Mx	.005	6
31	MP2C	X	-6.762	2
32	MP2C	Z	-3.904	2
33	MP2C	Mx	-.006	2
34	MP2C	X	-6.762	6
35	MP2C	Z	-3.904	6
36	MP2C	Mx	-.006	6
37	MP5A	X	-7.605	2
38	MP5A	Z	-4.391	2
39	MP5A	Mx	-.000638	2
40	MP5A	X	-7.605	6
41	MP5A	Z	-4.391	6
42	MP5A	Mx	-.000638	6
43	MP5B	X	-6.966	2
44	MP5B	Z	-4.022	2
45	MP5B	Mx	.005	2
46	MP5B	X	-6.966	6
47	MP5B	Z	-4.022	6
48	MP5B	Mx	.005	6

**Member Point Loads (BLC 37 : Antenna Wm (300 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	-6.762	2
50	MP5C	Z	-3.904	2
51	MP5C	Mx	-.006	2
52	MP5C	X	-6.762	6
53	MP5C	Z	-3.904	6
54	MP5C	Mx	-.006	6
55	MP3A	X	-8.642	2
56	MP3A	Z	-4.989	2
57	MP3A	Mx	.000995	2
58	MP3A	X	-8.642	6
59	MP3A	Z	-4.989	6
60	MP3A	Mx	.000995	6
61	MP3B	X	-10.7	2
62	MP3B	Z	-6.178	2
63	MP3B	Mx	.008	2
64	MP3B	X	-10.7	6
65	MP3B	Z	-6.178	6
66	MP3B	Mx	.008	6
67	MP3C	X	-8.642	2
68	MP3C	Z	-4.989	2
69	MP3C	Mx	-.008	2
70	MP3C	X	-8.642	6
71	MP3C	Z	-4.989	6
72	MP3C	Mx	-.008	6
73	MP3A	X	-8.642	2
74	MP3A	Z	-4.989	2
75	MP3A	Mx	.008	2
76	MP3A	X	-8.642	6
77	MP3A	Z	-4.989	6
78	MP3A	Mx	.008	6
79	MP3B	X	-10.7	2
80	MP3B	Z	-6.178	2
81	MP3B	Mx	-.008	2
82	MP3B	X	-10.7	6
83	MP3B	Z	-6.178	6
84	MP3B	Mx	-.008	6
85	MP3C	X	-8.642	2
86	MP3C	Z	-4.989	2
87	MP3C	Mx	-.000994	2
88	MP3C	X	-8.642	6
89	MP3C	Z	-4.989	6
90	MP3C	Mx	-.000994	6
91	MP6A	X	-7.041	2
92	MP6A	Z	-4.065	2
93	MP6A	Mx	0	2
94	MP3A	X	-3.034	4
95	MP3A	Z	-1.752	4
96	MP3A	Mx	-.002	4
97	MP3B	X	-4.038	4
98	MP3B	Z	-2.331	4
99	MP3B	Mx	0	4
100	MP3C	X	-3.034	4
101	MP3C	Z	-1.752	4
102	MP3C	Mx	.002	4
103	MP2A	X	-2.649	4
104	MP2A	Z	-1.53	4
105	MP2A	Mx	-.001	4
106	MP2B	X	-4.038	4
107	MP2B	Z	-2.331	4

**Member Point Loads (BLC 37 : Antenna Wm (300 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
108	MP2B	Mx	0	4
109	MP2C	X	-2.649	4
110	MP2C	Z	-1.53	4
111	MP2C	Mx	.001	4
112	MP1A	X	-1.803	0
113	MP1A	Z	-1.041	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 38 : Antenna Wm (330 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
1	MP4A	X	-2.484	3
2	MP4A	Z	-4.303	3
3	MP4A	Mx	.002	3
4	MP4A	X	-2.484	5
5	MP4A	Z	-4.303	5
6	MP4A	Mx	.002	5
7	MP4B	X	-2.484	3
8	MP4B	Z	-4.303	3
9	MP4B	Mx	.002	3
10	MP4B	X	-2.484	5
11	MP4B	Z	-4.303	5
12	MP4B	Mx	.002	5
13	MP4C	X	-1.147	3
14	MP4C	Z	-1.987	3
15	MP4C	Mx	-.002	3
16	MP4C	X	-1.147	5
17	MP4C	Z	-1.987	5
18	MP4C	Mx	-.002	5
19	MP2A	X	-4.212	2
20	MP2A	Z	-7.295	2
21	MP2A	Mx	-.004	2
22	MP2A	X	-4.212	6
23	MP2A	Z	-7.295	6
24	MP2A	Mx	-.004	6
25	MP2B	X	-3.843	2
26	MP2B	Z	-6.657	2
27	MP2B	Mx	.006	2
28	MP2B	X	-3.843	6
29	MP2B	Z	-6.657	6
30	MP2B	Mx	.006	6
31	MP2C	X	-4.165	2
32	MP2C	Z	-7.214	2
33	MP2C	Mx	-.004	2
34	MP2C	X	-4.165	6
35	MP2C	Z	-7.214	6
36	MP2C	Mx	-.004	6
37	MP5A	X	-4.212	2
38	MP5A	Z	-7.295	2
39	MP5A	Mx	-.004	2
40	MP5A	X	-4.212	6
41	MP5A	Z	-7.295	6
42	MP5A	Mx	-.004	6
43	MP5B	X	-3.843	2
44	MP5B	Z	-6.657	2
45	MP5B	Mx	.006	2
46	MP5B	X	-3.843	6
47	MP5B	Z	-6.657	6
48	MP5B	Mx	.006	6

**Member Point Loads (BLC 38 : Antenna Wm (330 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
49	MP5C	X	-4.165	2
50	MP5C	Z	-7.214	2
51	MP5C	Mx	-.004	2
52	MP5C	X	-4.165	6
53	MP5C	Z	-7.214	6
54	MP5C	Mx	-.004	6
55	MP3A	X	-5.782	2
56	MP3A	Z	-10.014	2
57	MP3A	Mx	-.004	2
58	MP3A	X	-5.782	6
59	MP3A	Z	-10.014	6
60	MP3A	Mx	-.004	6
61	MP3B	X	-5.782	2
62	MP3B	Z	-10.014	2
63	MP3B	Mx	.01	2
64	MP3B	X	-5.782	6
65	MP3B	Z	-10.014	6
66	MP3B	Mx	.01	6
67	MP3C	X	-4.593	2
68	MP3C	Z	-7.955	2
69	MP3C	Mx	-.005	2
70	MP3C	X	-4.593	6
71	MP3C	Z	-7.955	6
72	MP3C	Mx	-.005	6
73	MP3A	X	-5.782	2
74	MP3A	Z	-10.014	2
75	MP3A	Mx	.01	2
76	MP3A	X	-5.782	6
77	MP3A	Z	-10.014	6
78	MP3A	Mx	.01	6
79	MP3B	X	-5.782	2
80	MP3B	Z	-10.014	2
81	MP3B	Mx	-.004	2
82	MP3B	X	-5.782	6
83	MP3B	Z	-10.014	6
84	MP3B	Mx	-.004	6
85	MP3C	X	-4.593	2
86	MP3C	Z	-7.955	2
87	MP3C	Mx	-.005	2
88	MP3C	X	-4.593	6
89	MP3C	Z	-7.955	6
90	MP3C	Mx	-.005	6
91	MP6A	X	-3.315	2
92	MP6A	Z	-5.741	2
93	MP6A	Mx	0	2
94	MP3A	X	-2.138	4
95	MP3A	Z	-3.704	4
96	MP3A	Mx	-.001	4
97	MP3B	X	-2.138	4
98	MP3B	Z	-3.704	4
99	MP3B	Mx	-.001	4
100	MP3C	X	-1.558	4
101	MP3C	Z	-2.699	4
102	MP3C	Mx	.002	4
103	MP2A	X	-2.064	4
104	MP2A	Z	-3.575	4
105	MP2A	Mx	-.001	4
106	MP2B	X	-2.064	4
107	MP2B	Z	-3.575	4



**Member Point Loads (BLC 38 : Antenna Wm (330 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
108	MP2B	Mx	-.001	4
109	MP2C	X	-1.262	4
110	MP2C	Z	-2.186	4
111	MP2C	Mx	.001	4
112	MP1A	X	-.806	0
113	MP1A	Z	-1.397	0
114	MP1A	Mx	0	0

**Member Point Loads (BLC 77 : Lm1)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	FACE	Y	-500	%59

**Member Point Loads (BLC 78 : Lm2)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	FACE	Y	-500	%79

**Member Point Loads (BLC 79 : Lv1)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	FACE	Y	-250	%50

**Member Point Loads (BLC 80 : Lv2)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	FACE	Y	-250	0

**Member Point Loads (BLC 81 : Antenna Ev)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	Y	0	3
2	MP4A	My	0	3
3	MP4A	Mz	0	3
4	MP4A	Y	0	5
5	MP4A	My	0	5
6	MP4A	Mz	0	5
7	MP4B	Y	0	3
8	MP4B	My	0	3
9	MP4B	Mz	0	3
10	MP4B	Y	0	5
11	MP4B	My	0	5
12	MP4B	Mz	0	5
13	MP4C	Y	0	3
14	MP4C	My	0	3
15	MP4C	Mz	0	3
16	MP4C	Y	0	5
17	MP4C	My	0	5
18	MP4C	Mz	0	5
19	MP2A	Y	0	2
20	MP2A	My	0	2
21	MP2A	Mz	0	2
22	MP2A	Y	0	6
23	MP2A	My	0	6
24	MP2A	Mz	0	6
25	MP2B	Y	0	2
26	MP2B	My	0	2
27	MP2B	Mz	0	2
28	MP2B	Y	0	6
29	MP2B	My	0	6
30	MP2B	Mz	0	6

**Member Point Loads (BLC 81 : Antenna Ev) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
31	MP2C	Y	0	2
32	MP2C	My	0	2
33	MP2C	Mz	0	2
34	MP2C	Y	0	6
35	MP2C	My	0	6
36	MP2C	Mz	0	6
37	MP5A	Y	0	2
38	MP5A	My	0	2
39	MP5A	Mz	0	2
40	MP5A	Y	0	6
41	MP5A	My	0	6
42	MP5A	Mz	0	6
43	MP5B	Y	0	2
44	MP5B	My	0	2
45	MP5B	Mz	0	2
46	MP5B	Y	0	6
47	MP5B	My	0	6
48	MP5B	Mz	0	6
49	MP5C	Y	0	2
50	MP5C	My	0	2
51	MP5C	Mz	0	2
52	MP5C	Y	0	6
53	MP5C	My	0	6
54	MP5C	Mz	0	6
55	MP3A	Y	0	2
56	MP3A	My	0	2
57	MP3A	Mz	0	2
58	MP3A	Y	0	6
59	MP3A	My	0	6
60	MP3A	Mz	0	6
61	MP3B	Y	0	2
62	MP3B	My	0	2
63	MP3B	Mz	0	2
64	MP3B	Y	0	6
65	MP3B	My	0	6
66	MP3B	Mz	0	6
67	MP3C	Y	0	2
68	MP3C	My	0	2
69	MP3C	Mz	0	2
70	MP3C	Y	0	6
71	MP3C	My	0	6
72	MP3C	Mz	0	6
73	MP3A	Y	0	2
74	MP3A	My	0	2
75	MP3A	Mz	0	2
76	MP3A	Y	0	6
77	MP3A	My	0	6
78	MP3A	Mz	0	6
79	MP3B	Y	0	2
80	MP3B	My	0	2
81	MP3B	Mz	0	2
82	MP3B	Y	0	6
83	MP3B	My	0	6
84	MP3B	Mz	0	6
85	MP3C	Y	0	2
86	MP3C	My	0	2
87	MP3C	Mz	0	2
88	MP3C	Y	0	6
89	MP3C	My	0	6



**Member Point Loads (BLC 81 : Antenna Ev) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
90	MP3C	Mz	0	6
91	MP6A	Y	0	2
92	MP6A	My	0	2
93	MP6A	Mz	0	2
94	MP3A	Y	0	4
95	MP3A	My	0	4
96	MP3A	Mz	0	4
97	MP3B	Y	0	4
98	MP3B	My	0	4
99	MP3B	Mz	0	4
100	MP3C	Y	0	4
101	MP3C	My	0	4
102	MP3C	Mz	0	4
103	MP2A	Y	0	4
104	MP2A	My	0	4
105	MP2A	Mz	0	4
106	MP2B	Y	0	4
107	MP2B	My	0	4
108	MP2B	Mz	0	4
109	MP2C	Y	0	4
110	MP2C	My	0	4
111	MP2C	Mz	0	4
112	MP1A	Y	0	0
113	MP1A	My	0	0
114	MP1A	Mz	0	0

**Member Point Loads (BLC 82 : Antenna Eh (0 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
1	MP4A	Z	-1.306	3
2	MP4A	Mx	0	3
3	MP4A	Z	-1.306	5
4	MP4A	Mx	0	5
5	MP4B	Z	-1.306	3
6	MP4B	Mx	.000943	3
7	MP4B	Z	-1.306	5
8	MP4B	Mx	.000943	5
9	MP4C	Z	-1.306	3
10	MP4C	Mx	-.000943	3
11	MP4C	Z	-1.306	5
12	MP4C	Mx	-.000943	5
13	MP2A	Z	-.315	2
14	MP2A	Mx	-.000238	2
15	MP2A	Z	-.315	6
16	MP2A	Mx	-.000238	6
17	MP2B	Z	-.315	2
18	MP2B	Mx	.000238	2
19	MP2B	Z	-.315	6
20	MP2B	Mx	.000238	6
21	MP2C	Z	-.315	2
22	MP2C	Mx	-4.6e-5	2
23	MP2C	Z	-.315	6
24	MP2C	Mx	-4.6e-5	6
25	MP5A	Z	-.315	2
26	MP5A	Mx	-.000238	2
27	MP5A	Z	-.315	6
28	MP5A	Mx	-.000238	6
29	MP5B	Z	-.315	2
30	MP5B	Mx	.000238	2

**Member Point Loads (BLC 82 : Antenna Eh (0 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
31	MP5B	Z	-.315	6
32	MP5B	Mx	.000238	6
33	MP5C	Z	-.315	2
34	MP5C	Mx	-4.6e-5	2
35	MP5C	Z	-.315	6
36	MP5C	Mx	-4.6e-5	6
37	MP3A	Z	-.69	2
38	MP3A	Mx	-.00046	2
39	MP3A	Z	-.69	6
40	MP3A	Mx	-.00046	6
41	MP3B	Z	-.69	2
42	MP3B	Mx	.000529	2
43	MP3B	Z	-.69	6
44	MP3B	Mx	.000529	6
45	MP3C	Z	-.69	2
46	MP3C	Mx	-6.9e-5	2
47	MP3C	Z	-.69	6
48	MP3C	Mx	-6.9e-5	6
49	MP3A	Z	-.69	2
50	MP3A	Mx	.00046	2
51	MP3A	Z	-.69	6
52	MP3A	Mx	.00046	6
53	MP3B	Z	-.69	2
54	MP3B	Mx	6.9e-5	2
55	MP3B	Z	-.69	6
56	MP3B	Mx	6.9e-5	6
57	MP3C	Z	-.69	2
58	MP3C	Mx	-.000529	2
59	MP3C	Z	-.69	6
60	MP3C	Mx	-.000529	6
61	MP6A	Z	-.96	2
62	MP6A	Mx	0	2
63	MP3A	Z	-2.532	4
64	MP3A	Mx	0	4
65	MP3B	Z	-2.532	4
66	MP3B	Mx	-.001	4
67	MP3C	Z	-2.532	4
68	MP3C	Mx	.001	4
69	MP2A	Z	-2.109	4
70	MP2A	Mx	0	4
71	MP2B	Z	-2.109	4
72	MP2B	Mx	-.000913	4
73	MP2C	Z	-2.109	4
74	MP2C	Mx	.000913	4
75	MP1A	Z	-.3	0
76	MP1A	Mx	0	0

**Member Point Loads (BLC 83 : Antenna Eh (90 Deg))**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft. %]
1	MP4A	X	1.306	3
2	MP4A	Mx	-.001	3
3	MP4A	X	1.306	5
4	MP4A	Mx	-.001	5
5	MP4B	X	1.306	3
6	MP4B	Mx	.000544	3
7	MP4B	X	1.306	5
8	MP4B	Mx	.000544	5
9	MP4C	X	1.306	3



**Member Point Loads (BLC 83 : Antenna Eh (90 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
10	MP4C	Mx	.000544	3
11	MP4C	X	1.306	5
12	MP4C	Mx	.000544	5
13	MP2A	X	.315	2
14	MP2A	Mx	-.000111	2
15	MP2A	X	.315	6
16	MP2A	Mx	-.000111	6
17	MP2B	X	.315	2
18	MP2B	Mx	-.000111	2
19	MP2B	X	.315	6
20	MP2B	Mx	-.000111	6
21	MP2C	X	.315	2
22	MP2C	Mx	.000259	2
23	MP2C	X	.315	6
24	MP2C	Mx	.000259	6
25	MP5A	X	.315	2
26	MP5A	Mx	-.000111	2
27	MP5A	X	.315	6
28	MP5A	Mx	-.000111	6
29	MP5B	X	.315	2
30	MP5B	Mx	-.000111	2
31	MP5B	X	.315	6
32	MP5B	Mx	-.000111	6
33	MP5C	X	.315	2
34	MP5C	Mx	.000259	2
35	MP5C	X	.315	6
36	MP5C	Mx	.000259	6
37	MP3A	X	.69	2
38	MP3A	Mx	-.000345	2
39	MP3A	X	.69	6
40	MP3A	Mx	-.000345	6
41	MP3B	X	.69	2
42	MP3B	Mx	-.000226	2
43	MP3B	X	.69	6
44	MP3B	Mx	-.000226	6
45	MP3C	X	.69	2
46	MP3C	Mx	.000571	2
47	MP3C	X	.69	6
48	MP3C	Mx	.000571	6
49	MP3A	X	.69	2
50	MP3A	Mx	-.000345	2
51	MP3A	X	.69	6
52	MP3A	Mx	-.000345	6
53	MP3B	X	.69	2
54	MP3B	Mx	.000571	2
55	MP3B	X	.69	6
56	MP3B	Mx	.000571	6
57	MP3C	X	.69	2
58	MP3C	Mx	-.000226	2
59	MP3C	X	.69	6
60	MP3C	Mx	-.000226	6
61	MP6A	X	.96	2
62	MP6A	Mx	0	2
63	MP3A	X	2.532	4
64	MP3A	Mx	.001	4
65	MP3B	X	2.532	4
66	MP3B	Mx	-.000633	4
67	MP3C	X	2.532	4
68	MP3C	Mx	-.000633	4

**Member Point Loads (BLC 83 : Antenna Eh (90 Deg)) (Continued)**

	Member Label	Direction	Magnitude[lb.k-ft]	Location[ft.%]
69	MP2A	X	2.109	4
70	MP2A	Mx	.001	4
71	MP2B	X	2.109	4
72	MP2B	Mx	-.000527	4
73	MP2C	X	2.109	4
74	MP2C	Mx	-.000527	4
75	MP1A	X	.3	0
76	MP1A	Mx	0	0

**Member Distributed Loads (BLC 40 : Structure Di)**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
1	M1	Y	-9.278	-9.278	0	%100
2	M2	Y	-17.976	-17.976	0	%100
3	FACE	Y	-8.786	-8.786	0	%100
4	M17	Y	-8.786	-8.786	0	%100
5	M8	Y	-8.786	-8.786	0	%100
6	M9	Y	-8.786	-8.786	0	%100
7	M9A	Y	-8.379	-8.379	0	%100
8	M10	Y	-8.379	-8.379	0	%100
9	M11	Y	-9.278	-9.278	0	%100
10	M12	Y	-9.278	-9.278	0	%100
11	M15	Y	-17.976	-17.976	0	%100
12	M17A	Y	-17.976	-17.976	0	%100
13	OVP	Y	-5.47	-5.47	0	%100
14	MP1A	Y	-4.785	-4.785	0	%100
15	MP6A	Y	-4.785	-4.785	0	%100
16	MP2A	Y	-4.785	-4.785	0	%100
17	MP3A	Y	-5.47	-5.47	0	%100
18	MP4A	Y	-4.785	-4.785	0	%100
19	MP5A	Y	-4.785	-4.785	0	%100
20	MP1C	Y	-4.785	-4.785	0	%100
21	MP6C	Y	-4.785	-4.785	0	%100
22	MP2C	Y	-4.785	-4.785	0	%100
23	MP3C	Y	-5.47	-5.47	0	%100
24	MP4C	Y	-4.785	-4.785	0	%100
25	MP5C	Y	-4.785	-4.785	0	%100
26	MP1B	Y	-4.785	-4.785	0	%100
27	MP6B	Y	-4.785	-4.785	0	%100
28	MP2B	Y	-4.785	-4.785	0	%100
29	MP3B	Y	-5.47	-5.47	0	%100
30	MP4B	Y	-4.785	-4.785	0	%100
31	MP5B	Y	-4.785	-4.785	0	%100
32	M80A	Y	-5.47	-5.47	0	%100
33	M81A	Y	-5.47	-5.47	0	%100
34	M88	Y	-7.342	-7.342	0	%100
35	M95A	Y	-7.342	-7.342	0	%100
36	M102	Y	-7.342	-7.342	0	%100
37	M91	Y	-10.775	-10.775	0	%100
38	M92	Y	-10.775	-10.775	0	%100
39	M93	Y	-10.775	-10.775	0	%100
40	M94A	Y	-7.342	-7.342	0	%100
41	M95B	Y	-7.342	-7.342	0	%100
42	M96A	Y	-7.342	-7.342	0	%100

**Member Distributed Loads (BLC 41 : Structure Wo (0 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
1	M1	X	0	0	0	%100



**Member Distributed Loads (BLC 41 : Structure Wo (0 Deg)) (Continued)**

Member Label	Direction	Start Magnitude lb/ft....	End Magnitude lb/ft....	Start Location ft.%	End Location ft.%
2	M1	Z	0	0	%100
3	M2	X	0	0	%100
4	M2	Z	-1.962	-1.962	%100
5	FACE	X	0	0	%100
6	FACE	Z	-32.696	-32.696	%100
7	M17	X	0	0	%100
8	M17	Z	-28.071	-28.071	%100
9	M8	X	0	0	%100
10	M8	Z	-8.174	-8.174	%100
11	M9	X	0	0	%100
12	M9	Z	-8.174	-8.174	%100
13	M9A	X	0	0	%100
14	M9A	Z	0	0	%100
15	M10	X	0	0	%100
16	M10	Z	0	0	%100
17	M11	X	0	0	%100
18	M11	Z	-11.117	-11.117	%100
19	M12	X	0	0	%100
20	M12	Z	-11.117	-11.117	%100
21	M15	X	0	0	%100
22	M15	Z	-.49	-.49	%100
23	M17A	X	0	0	%100
24	M17A	Z	-.49	-.49	%100
25	OVP	X	0	0	%100
26	OVP	Z	-11.28	-11.28	%100
27	MP1A	X	0	0	%100
28	MP1A	Z	-9.318	-9.318	%100
29	MP6A	X	0	0	%100
30	MP6A	Z	-9.318	-9.318	%100
31	MP2A	X	0	0	%100
32	MP2A	Z	-9.318	-9.318	%100
33	MP3A	X	0	0	%100
34	MP3A	Z	-11.28	-11.28	%100
35	MP4A	X	0	0	%100
36	MP4A	Z	-9.318	-9.318	%100
37	MP5A	X	0	0	%100
38	MP5A	Z	-9.318	-9.318	%100
39	MP1C	X	0	0	%100
40	MP1C	Z	-9.318	-9.318	%100
41	MP6C	X	0	0	%100
42	MP6C	Z	-9.318	-9.318	%100
43	MP2C	X	0	0	%100
44	MP2C	Z	-9.318	-9.318	%100
45	MP3C	X	0	0	%100
46	MP3C	Z	-11.28	-11.28	%100
47	MP4C	X	0	0	%100
48	MP4C	Z	-9.318	-9.318	%100
49	MP5C	X	0	0	%100
50	MP5C	Z	-9.318	-9.318	%100
51	MP1B	X	0	0	%100
52	MP1B	Z	-9.318	-9.318	%100
53	MP6B	X	0	0	%100
54	MP6B	Z	-8.056	-8.056	%100
55	MP2B	X	0	0	%100
56	MP2B	Z	-9.318	-9.318	%100
57	MP3B	X	0	0	%100
58	MP3B	Z	-11.28	-11.28	%100
59	MP4B	X	0	0	%100
60	MP4B	Z	-9.318	-9.318	%100

**Member Distributed Loads (BLC 41 : Structure Wo (0 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft,...	End Magnitude[lb/ft,...	Start Location[ft, %]	End Location[ft, %]	
61	MP5B	X	0	0	0	%100
62	MP5B	Z	-9.318	-9.318	0	%100
63	M80A	X	0	0	0	%100
64	M80A	Z	-2.82	-2.82	0	%100
65	M81A	X	0	0	0	%100
66	M81A	Z	-2.82	-2.82	0	%100
67	M88	X	0	0	0	%100
68	M88	Z	-3.524	-3.524	0	%100
69	M95A	X	0	0	0	%100
70	M95A	Z	-3.524	-3.524	0	%100
71	M102	X	0	0	0	%100
72	M102	Z	-14.097	-14.097	0	%100
73	M91	X	0	0	0	%100
74	M91	Z	-11.623	-11.623	0	%100
75	M92	X	0	0	0	%100
76	M92	Z	-16.393	-16.393	0	%100
77	M93	X	0	0	0	%100
78	M93	Z	-16.393	-16.393	0	%100
79	M94A	X	0	0	0	%100
80	M94A	Z	-4.178	-4.178	0	%100
81	M95B	X	0	0	0	%100
82	M95B	Z	-4.178	-4.178	0	%100
83	M96A	X	0	0	0	%100
84	M96A	Z	-16.712	-16.712	0	%100

**Member Distributed Loads (BLC 42 : Structure Wo (30 Deg))**

Member Label	Direction	Start Magnitude[lb/ft,...	End Magnitude[lb/ft,...	Start Location[ft, %]	End Location[ft, %]	
1	M1	X	1.853	1.853	0	%100
2	M1	Z	-3.209	-3.209	0	%100
3	M2	X	.736	.736	0	%100
4	M2	Z	-1.274	-1.274	0	%100
5	FACE	X	12.261	12.261	0	%100
6	FACE	Z	-21.237	-21.237	0	%100
7	M17	X	10.526	10.526	0	%100
8	M17	Z	-18.232	-18.232	0	%100
9	M8	X	12.261	12.261	0	%100
10	M8	Z	-21.237	-21.237	0	%100
11	M9	X	0	0	0	%100
12	M9	Z	0	0	0	%100
13	M9A	X	2.095	2.095	0	%100
14	M9A	Z	-3.628	-3.628	0	%100
15	M10	X	2.095	2.095	0	%100
16	M10	Z	-3.628	-3.628	0	%100
17	M11	X	1.853	1.853	0	%100
18	M11	Z	-3.209	-3.209	0	%100
19	M12	X	7.411	7.411	0	%100
20	M12	Z	-12.836	-12.836	0	%100
21	M15	X	.736	.736	0	%100
22	M15	Z	-1.274	-1.274	0	%100
23	M17A	X	0	0	0	%100
24	M17A	Z	0	0	0	%100
25	OVP	X	4.23	4.23	0	%100
26	OVP	Z	-7.327	-7.327	0	%100
27	MP1A	X	4.659	4.659	0	%100
28	MP1A	Z	-8.07	-8.07	0	%100
29	MP6A	X	4.659	4.659	0	%100
30	MP6A	Z	-8.07	-8.07	0	%100
31	MP2A	X	4.659	4.659	0	%100



**Member Distributed Loads (BLC 42 : Structure Wo (30 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
32	MP2A	Z	-8.07	-8.07	0	%100
33	MP3A	X	5.64	5.64	0	%100
34	MP3A	Z	-9.769	-9.769	0	%100
35	MP4A	X	4.659	4.659	0	%100
36	MP4A	Z	-8.07	-8.07	0	%100
37	MP5A	X	4.659	4.659	0	%100
38	MP5A	Z	-8.07	-8.07	0	%100
39	MP1C	X	4.659	4.659	0	%100
40	MP1C	Z	-8.07	-8.07	0	%100
41	MP6C	X	4.659	4.659	0	%100
42	MP6C	Z	-8.07	-8.07	0	%100
43	MP2C	X	4.659	4.659	0	%100
44	MP2C	Z	-8.07	-8.07	0	%100
45	MP3C	X	5.64	5.64	0	%100
46	MP3C	Z	-9.769	-9.769	0	%100
47	MP4C	X	4.659	4.659	0	%100
48	MP4C	Z	-8.07	-8.07	0	%100
49	MP5C	X	4.659	4.659	0	%100
50	MP5C	Z	-8.07	-8.07	0	%100
51	MP1B	X	4.659	4.659	0	%100
52	MP1B	Z	-8.07	-8.07	0	%100
53	MP6B	X	4.028	4.028	0	%100
54	MP6B	Z	-6.977	-6.977	0	%100
55	MP2B	X	4.659	4.659	0	%100
56	MP2B	Z	-8.07	-8.07	0	%100
57	MP3B	X	5.64	5.64	0	%100
58	MP3B	Z	-9.769	-9.769	0	%100
59	MP4B	X	4.659	4.659	0	%100
60	MP4B	Z	-8.07	-8.07	0	%100
61	MP5B	X	4.659	4.659	0	%100
62	MP5B	Z	-8.07	-8.07	0	%100
63	M80A	X	4.23	4.23	0	%100
64	M80A	Z	-7.327	-7.327	0	%100
65	M81A	X	0	0	0	%100
66	M81A	Z	0	0	0	%100
67	M88	X	5.286	5.286	0	%100
68	M88	Z	-9.156	-9.156	0	%100
69	M95A	X	0	0	0	%100
70	M95A	Z	0	0	0	%100
71	M102	X	5.286	5.286	0	%100
72	M102	Z	-9.156	-9.156	0	%100
73	M91	X	6.607	6.607	0	%100
74	M91	Z	-11.443	-11.443	0	%100
75	M92	X	6.607	6.607	0	%100
76	M92	Z	-11.443	-11.443	0	%100
77	M93	X	8.991	8.991	0	%100
78	M93	Z	-15.573	-15.573	0	%100
79	M94A	X	6.267	6.267	0	%100
80	M94A	Z	-10.855	-10.855	0	%100
81	M95B	X	0	0	0	%100
82	M95B	Z	0	0	0	%100
83	M96A	X	6.267	6.267	0	%100
84	M96A	Z	-10.855	-10.855	0	%100

**Member Distributed Loads (BLC 43 : Structure Wo (60 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	9.627	9.627	0	%100
2	M1	Z	-5.558	-5.558	0	%100



**Member Distributed Loads (BLC 43 : Structure Wo (60 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
3	M2	X	.425	.425	0 %100
4	M2	Z	-.245	-.245	0 %100
5	FACE	X	7.079	7.079	0 %100
6	FACE	Z	-4.087	-4.087	0 %100
7	M17	X	6.077	6.077	0 %100
8	M17	Z	-3.509	-3.509	0 %100
9	M8	X	28.315	28.315	0 %100
10	M8	Z	-16.348	-16.348	0 %100
11	M9	X	7.079	7.079	0 %100
12	M9	Z	-4.087	-4.087	0 %100
13	M9A	X	10.884	10.884	0 %100
14	M9A	Z	-6.284	-6.284	0 %100
15	M10	X	10.884	10.884	0 %100
16	M10	Z	-6.284	-6.284	0 %100
17	M11	X	0	0	0 %100
18	M11	Z	0	0	0 %100
19	M12	X	9.627	9.627	0 %100
20	M12	Z	-5.558	-5.558	0 %100
21	M15	X	1.699	1.699	0 %100
22	M15	Z	-.981	-.981	0 %100
23	M17A	X	.425	.425	0 %100
24	M17A	Z	-.245	-.245	0 %100
25	OVP	X	2.442	2.442	0 %100
26	OVP	Z	-1.41	-1.41	0 %100
27	MP1A	X	8.07	8.07	0 %100
28	MP1A	Z	-4.659	-4.659	0 %100
29	MP6A	X	8.07	8.07	0 %100
30	MP6A	Z	-4.659	-4.659	0 %100
31	MP2A	X	8.07	8.07	0 %100
32	MP2A	Z	-4.659	-4.659	0 %100
33	MP3A	X	9.769	9.769	0 %100
34	MP3A	Z	-5.64	-5.64	0 %100
35	MP4A	X	8.07	8.07	0 %100
36	MP4A	Z	-4.659	-4.659	0 %100
37	MP5A	X	8.07	8.07	0 %100
38	MP5A	Z	-4.659	-4.659	0 %100
39	MP1C	X	8.07	8.07	0 %100
40	MP1C	Z	-4.659	-4.659	0 %100
41	MP6C	X	8.07	8.07	0 %100
42	MP6C	Z	-4.659	-4.659	0 %100
43	MP2C	X	8.07	8.07	0 %100
44	MP2C	Z	-4.659	-4.659	0 %100
45	MP3C	X	9.769	9.769	0 %100
46	MP3C	Z	-5.64	-5.64	0 %100
47	MP4C	X	8.07	8.07	0 %100
48	MP4C	Z	-4.659	-4.659	0 %100
49	MP5C	X	8.07	8.07	0 %100
50	MP5C	Z	-4.659	-4.659	0 %100
51	MP1B	X	8.07	8.07	0 %100
52	MP1B	Z	-4.659	-4.659	0 %100
53	MP6B	X	6.977	6.977	0 %100
54	MP6B	Z	-4.028	-4.028	0 %100
55	MP2B	X	8.07	8.07	0 %100
56	MP2B	Z	-4.659	-4.659	0 %100
57	MP3B	X	9.769	9.769	0 %100
58	MP3B	Z	-5.64	-5.64	0 %100
59	MP4B	X	8.07	8.07	0 %100
60	MP4B	Z	-4.659	-4.659	0 %100
61	MP5B	X	8.07	8.07	0 %100

**Member Distributed Loads (BLC 43 : Structure Wo (60 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
62	MP5B	Z	-4.659	-4.659	0	%100
63	M80A	X	9.769	9.769	0	%100
64	M80A	Z	-5.64	-5.64	0	%100
65	M81A	X	2.442	2.442	0	%100
66	M81A	Z	-1.41	-1.41	0	%100
67	M88	X	12.208	12.208	0	%100
68	M88	Z	-7.048	-7.048	0	%100
69	M95A	X	3.052	3.052	0	%100
70	M95A	Z	-1.762	-1.762	0	%100
71	M102	X	3.052	3.052	0	%100
72	M102	Z	-1.762	-1.762	0	%100
73	M91	X	14.197	14.197	0	%100
74	M91	Z	-8.196	-8.196	0	%100
75	M92	X	10.066	10.066	0	%100
76	M92	Z	-5.812	-5.812	0	%100
77	M93	X	14.197	14.197	0	%100
78	M93	Z	-8.196	-8.196	0	%100
79	M94A	X	14.473	14.473	0	%100
80	M94A	Z	-8.356	-8.356	0	%100
81	M95B	X	3.618	3.618	0	%100
82	M95B	Z	-2.089	-2.089	0	%100
83	M96A	X	3.618	3.618	0	%100
84	M96A	Z	-2.089	-2.089	0	%100

**Member Distributed Loads (BLC 44 : Structure Wo (90 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	14.822	14.822	0	%100
2	M1	Z	0	0	0	%100
3	M2	X	0	0	0	%100
4	M2	Z	0	0	0	%100
5	FACE	X	0	0	0	%100
6	FACE	Z	0	0	0	%100
7	M17	X	0	0	0	%100
8	M17	Z	0	0	0	%100
9	M8	X	24.522	24.522	0	%100
10	M8	Z	0	0	0	%100
11	M9	X	24.522	24.522	0	%100
12	M9	Z	0	0	0	%100
13	M9A	X	16.757	16.757	0	%100
14	M9A	Z	0	0	0	%100
15	M10	X	16.757	16.757	0	%100
16	M10	Z	0	0	0	%100
17	M11	X	3.706	3.706	0	%100
18	M11	Z	0	0	0	%100
19	M12	X	3.706	3.706	0	%100
20	M12	Z	0	0	0	%100
21	M15	X	1.471	1.471	0	%100
22	M15	Z	0	0	0	%100
23	M17A	X	1.471	1.471	0	%100
24	M17A	Z	0	0	0	%100
25	OVP	X	0	0	0	%100
26	OVP	Z	0	0	0	%100
27	MP1A	X	9.318	9.318	0	%100
28	MP1A	Z	0	0	0	%100
29	MP6A	X	9.318	9.318	0	%100
30	MP6A	Z	0	0	0	%100
31	MP2A	X	9.318	9.318	0	%100
32	MP2A	Z	0	0	0	%100

**Member Distributed Loads (BLC 44 : Structure Wo (90 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft, %]	End Location[ft, %]
33	MP3A	X	11.28	11.28	0	%100
34	MP3A	Z	0	0	0	%100
35	MP4A	X	9.318	9.318	0	%100
36	MP4A	Z	0	0	0	%100
37	MP5A	X	9.318	9.318	0	%100
38	MP5A	Z	0	0	0	%100
39	MP1C	X	9.318	9.318	0	%100
40	MP1C	Z	0	0	0	%100
41	MP6C	X	9.318	9.318	0	%100
42	MP6C	Z	0	0	0	%100
43	MP2C	X	9.318	9.318	0	%100
44	MP2C	Z	0	0	0	%100
45	MP3C	X	11.28	11.28	0	%100
46	MP3C	Z	0	0	0	%100
47	MP4C	X	9.318	9.318	0	%100
48	MP4C	Z	0	0	0	%100
49	MP5C	X	9.318	9.318	0	%100
50	MP5C	Z	0	0	0	%100
51	MP1B	X	9.318	9.318	0	%100
52	MP1B	Z	0	0	0	%100
53	MP6B	X	8.056	8.056	0	%100
54	MP6B	Z	0	0	0	%100
55	MP2B	X	9.318	9.318	0	%100
56	MP2B	Z	0	0	0	%100
57	MP3B	X	11.28	11.28	0	%100
58	MP3B	Z	0	0	0	%100
59	MP4B	X	9.318	9.318	0	%100
60	MP4B	Z	0	0	0	%100
61	MP5B	X	9.318	9.318	0	%100
62	MP5B	Z	0	0	0	%100
63	M80A	X	8.46	8.46	0	%100
64	M80A	Z	0	0	0	%100
65	M81A	X	8.46	8.46	0	%100
66	M81A	Z	0	0	0	%100
67	M88	X	10.573	10.573	0	%100
68	M88	Z	0	0	0	%100
69	M95A	X	10.572	10.572	0	%100
70	M95A	Z	0	0	0	%100
71	M102	X	0	0	0	%100
72	M102	Z	0	0	0	%100
73	M91	X	17.983	17.983	0	%100
74	M91	Z	0	0	0	%100
75	M92	X	13.213	13.213	0	%100
76	M92	Z	0	0	0	%100
77	M93	X	13.213	13.213	0	%100
78	M93	Z	0	0	0	%100
79	M94A	X	12.534	12.534	0	%100
80	M94A	Z	0	0	0	%100
81	M95B	X	12.534	12.534	0	%100
82	M95B	Z	0	0	0	%100
83	M96A	X	0	0	0	%100
84	M96A	Z	0	0	0	%100

**Member Distributed Loads (BLC 45 : Structure Wo (120 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft, %]	End Location[ft, %]
1	M1	X	9.627	9.627	0	%100
2	M1	Z	5.558	5.558	0	%100
3	M2	X	.425	.425	0	%100



**Member Distributed Loads (BLC 45 : Structure Wo (120 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
4	M2	Z	.245	.245	0 %100
5	FACE	X	7.079	7.079	0 %100
6	FACE	Z	4.087	4.087	0 %100
7	M17	X	6.077	6.077	0 %100
8	M17	Z	3.509	3.509	0 %100
9	M8	X	7.079	7.079	0 %100
10	M8	Z	4.087	4.087	0 %100
11	M9	X	28.315	28.315	0 %100
12	M9	Z	16.348	16.348	0 %100
13	M9A	X	10.884	10.884	0 %100
14	M9A	Z	6.284	6.284	0 %100
15	M10	X	10.884	10.884	0 %100
16	M10	Z	6.284	6.284	0 %100
17	M11	X	9.627	9.627	0 %100
18	M11	Z	5.558	5.558	0 %100
19	M12	X	0	0	0 %100
20	M12	Z	0	0	0 %100
21	M15	X	.425	.425	0 %100
22	M15	Z	.245	.245	0 %100
23	M17A	X	1.699	1.699	0 %100
24	M17A	Z	.981	.981	0 %100
25	OVP	X	2.442	2.442	0 %100
26	OVP	Z	1.41	1.41	0 %100
27	MP1A	X	8.07	8.07	0 %100
28	MP1A	Z	4.659	4.659	0 %100
29	MP6A	X	8.07	8.07	0 %100
30	MP6A	Z	4.659	4.659	0 %100
31	MP2A	X	8.07	8.07	0 %100
32	MP2A	Z	4.659	4.659	0 %100
33	MP3A	X	9.769	9.769	0 %100
34	MP3A	Z	5.64	5.64	0 %100
35	MP4A	X	8.07	8.07	0 %100
36	MP4A	Z	4.659	4.659	0 %100
37	MP5A	X	8.07	8.07	0 %100
38	MP5A	Z	4.659	4.659	0 %100
39	MP1C	X	8.07	8.07	0 %100
40	MP1C	Z	4.659	4.659	0 %100
41	MP6C	X	8.07	8.07	0 %100
42	MP6C	Z	4.659	4.659	0 %100
43	MP2C	X	8.07	8.07	0 %100
44	MP2C	Z	4.659	4.659	0 %100
45	MP3C	X	9.769	9.769	0 %100
46	MP3C	Z	5.64	5.64	0 %100
47	MP4C	X	8.07	8.07	0 %100
48	MP4C	Z	4.659	4.659	0 %100
49	MP5C	X	8.07	8.07	0 %100
50	MP5C	Z	4.659	4.659	0 %100
51	MP1B	X	8.07	8.07	0 %100
52	MP1B	Z	4.659	4.659	0 %100
53	MP6B	X	6.977	6.977	0 %100
54	MP6B	Z	4.028	4.028	0 %100
55	MP2B	X	8.07	8.07	0 %100
56	MP2B	Z	4.659	4.659	0 %100
57	MP3B	X	9.769	9.769	0 %100
58	MP3B	Z	5.64	5.64	0 %100
59	MP4B	X	8.07	8.07	0 %100
60	MP4B	Z	4.659	4.659	0 %100
61	MP5B	X	8.07	8.07	0 %100
62	MP5B	Z	4.659	4.659	0 %100

**Member Distributed Loads (BLC 45 : Structure Wo (120 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
63	M80A	X	2.442	2.442	0	%100
64	M80A	Z	1.41	1.41	0	%100
65	M81A	X	9.769	9.769	0	%100
66	M81A	Z	5.64	5.64	0	%100
67	M88	X	3.052	3.052	0	%100
68	M88	Z	1.762	1.762	0	%100
69	M95A	X	12.208	12.208	0	%100
70	M95A	Z	7.048	7.048	0	%100
71	M102	X	3.052	3.052	0	%100
72	M102	Z	1.762	1.762	0	%100
73	M91	X	14.197	14.197	0	%100
74	M91	Z	8.196	8.196	0	%100
75	M92	X	14.197	14.197	0	%100
76	M92	Z	8.196	8.196	0	%100
77	M93	X	10.066	10.066	0	%100
78	M93	Z	5.812	5.812	0	%100
79	M94A	X	3.618	3.618	0	%100
80	M94A	Z	2.089	2.089	0	%100
81	M95B	X	14.473	14.473	0	%100
82	M95B	Z	8.356	8.356	0	%100
83	M96A	X	3.618	3.618	0	%100
84	M96A	Z	2.089	2.089	0	%100

**Member Distributed Loads (BLC 46 : Structure Wo (150 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	1.853	1.853	0	%100
2	M1	Z	3.209	3.209	0	%100
3	M2	X	.736	.736	0	%100
4	M2	Z	1.274	1.274	0	%100
5	FACE	X	12.261	12.261	0	%100
6	FACE	Z	21.237	21.237	0	%100
7	M17	X	10.526	10.526	0	%100
8	M17	Z	18.232	18.232	0	%100
9	M8	X	0	0	0	%100
10	M8	Z	0	0	0	%100
11	M9	X	12.261	12.261	0	%100
12	M9	Z	21.237	21.237	0	%100
13	M9A	X	2.095	2.095	0	%100
14	M9A	Z	3.628	3.628	0	%100
15	M10	X	2.095	2.095	0	%100
16	M10	Z	3.628	3.628	0	%100
17	M11	X	7.411	7.411	0	%100
18	M11	Z	12.836	12.836	0	%100
19	M12	X	1.853	1.853	0	%100
20	M12	Z	3.209	3.209	0	%100
21	M15	X	0	0	0	%100
22	M15	Z	0	0	0	%100
23	M17A	X	.736	.736	0	%100
24	M17A	Z	1.274	1.274	0	%100
25	OVP	X	4.23	4.23	0	%100
26	OVP	Z	7.327	7.327	0	%100
27	MP1A	X	4.659	4.659	0	%100
28	MP1A	Z	8.07	8.07	0	%100
29	MP6A	X	4.659	4.659	0	%100
30	MP6A	Z	8.07	8.07	0	%100
31	MP2A	X	4.659	4.659	0	%100
32	MP2A	Z	8.07	8.07	0	%100
33	MP3A	X	5.64	5.64	0	%100



**Member Distributed Loads (BLC 46 : Structure Wo (150 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
34	MP3A	Z	9.769	9.769	0	%100
35	MP4A	X	4.659	4.659	0	%100
36	MP4A	Z	8.07	8.07	0	%100
37	MP5A	X	4.659	4.659	0	%100
38	MP5A	Z	8.07	8.07	0	%100
39	MP1C	X	4.659	4.659	0	%100
40	MP1C	Z	8.07	8.07	0	%100
41	MP6C	X	4.659	4.659	0	%100
42	MP6C	Z	8.07	8.07	0	%100
43	MP2C	X	4.659	4.659	0	%100
44	MP2C	Z	8.07	8.07	0	%100
45	MP3C	X	5.64	5.64	0	%100
46	MP3C	Z	9.769	9.769	0	%100
47	MP4C	X	4.659	4.659	0	%100
48	MP4C	Z	8.07	8.07	0	%100
49	MP5C	X	4.659	4.659	0	%100
50	MP5C	Z	8.07	8.07	0	%100
51	MP1B	X	4.659	4.659	0	%100
52	MP1B	Z	8.07	8.07	0	%100
53	MP6B	X	4.028	4.028	0	%100
54	MP6B	Z	6.977	6.977	0	%100
55	MP2B	X	4.659	4.659	0	%100
56	MP2B	Z	8.07	8.07	0	%100
57	MP3B	X	5.64	5.64	0	%100
58	MP3B	Z	9.769	9.769	0	%100
59	MP4B	X	4.659	4.659	0	%100
60	MP4B	Z	8.07	8.07	0	%100
61	MP5B	X	4.659	4.659	0	%100
62	MP5B	Z	8.07	8.07	0	%100
63	M80A	X	0	0	0	%100
64	M80A	Z	0	0	0	%100
65	M81A	X	4.23	4.23	0	%100
66	M81A	Z	7.327	7.327	0	%100
67	M88	X	0	0	0	%100
68	M88	Z	0	0	0	%100
69	M95A	X	5.286	5.286	0	%100
70	M95A	Z	9.156	9.156	0	%100
71	M102	X	5.286	5.286	0	%100
72	M102	Z	9.156	9.156	0	%100
73	M91	X	6.607	6.607	0	%100
74	M91	Z	11.443	11.443	0	%100
75	M92	X	8.991	8.991	0	%100
76	M92	Z	15.573	15.573	0	%100
77	M93	X	6.607	6.607	0	%100
78	M93	Z	11.443	11.443	0	%100
79	M94A	X	0	0	0	%100
80	M94A	Z	0	0	0	%100
81	M95B	X	6.267	6.267	0	%100
82	M95B	Z	10.855	10.855	0	%100
83	M96A	X	6.267	6.267	0	%100
84	M96A	Z	10.855	10.855	0	%100

**Member Distributed Loads (BLC 47 : Structure Wo (180 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
1	M1	X	0	0	0	%100
2	M1	Z	0	0	0	%100
3	M2	X	0	0	0	%100
4	M2	Z	1.962	1.962	0	%100



**Member Distributed Loads (BLC 47 : Structure Wo (180 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
5	FACE	X	0	0	%100
6	FACE	Z	32.696	32.696	0
7	M17	X	0	0	%100
8	M17	Z	28.071	28.071	0
9	M8	X	0	0	%100
10	M8	Z	8.174	8.174	0
11	M9	X	0	0	%100
12	M9	Z	8.174	8.174	0
13	M9A	X	0	0	%100
14	M9A	Z	0	0	%100
15	M10	X	0	0	%100
16	M10	Z	0	0	%100
17	M11	X	0	0	%100
18	M11	Z	11.117	11.117	0
19	M12	X	0	0	%100
20	M12	Z	11.117	11.117	0
21	M15	X	0	0	%100
22	M15	Z	.49	.49	0
23	M17A	X	0	0	%100
24	M17A	Z	.49	.49	0
25	OVP	X	0	0	%100
26	OVP	Z	11.28	11.28	0
27	MP1A	X	0	0	%100
28	MP1A	Z	9.318	9.318	0
29	MP6A	X	0	0	%100
30	MP6A	Z	9.318	9.318	0
31	MP2A	X	0	0	%100
32	MP2A	Z	9.318	9.318	0
33	MP3A	X	0	0	%100
34	MP3A	Z	11.28	11.28	0
35	MP4A	X	0	0	%100
36	MP4A	Z	9.318	9.318	0
37	MP5A	X	0	0	%100
38	MP5A	Z	9.318	9.318	0
39	MP1C	X	0	0	%100
40	MP1C	Z	9.318	9.318	0
41	MP6C	X	0	0	%100
42	MP6C	Z	9.318	9.318	0
43	MP2C	X	0	0	%100
44	MP2C	Z	9.318	9.318	0
45	MP3C	X	0	0	%100
46	MP3C	Z	11.28	11.28	0
47	MP4C	X	0	0	%100
48	MP4C	Z	9.318	9.318	0
49	MP5C	X	0	0	%100
50	MP5C	Z	9.318	9.318	0
51	MP1B	X	0	0	%100
52	MP1B	Z	9.318	9.318	0
53	MP6B	X	0	0	%100
54	MP6B	Z	8.056	8.056	0
55	MP2B	X	0	0	%100
56	MP2B	Z	9.318	9.318	0
57	MP3B	X	0	0	%100
58	MP3B	Z	11.28	11.28	0
59	MP4B	X	0	0	%100
60	MP4B	Z	9.318	9.318	0
61	MP5B	X	0	0	%100
62	MP5B	Z	9.318	9.318	0
63	M80A	X	0	0	%100

**Member Distributed Loads (BLC 47 : Structure Wo (180 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
64	M80A	Z	2.82	2.82	0	%100
65	M81A	X	0	0	0	%100
66	M81A	Z	2.82	2.82	0	%100
67	M88	X	0	0	0	%100
68	M88	Z	3.524	3.524	0	%100
69	M95A	X	0	0	0	%100
70	M95A	Z	3.524	3.524	0	%100
71	M102	X	0	0	0	%100
72	M102	Z	14.097	14.097	0	%100
73	M91	X	0	0	0	%100
74	M91	Z	11.623	11.623	0	%100
75	M92	X	0	0	0	%100
76	M92	Z	16.393	16.393	0	%100
77	M93	X	0	0	0	%100
78	M93	Z	16.393	16.393	0	%100
79	M94A	X	0	0	0	%100
80	M94A	Z	4.178	4.178	0	%100
81	M95B	X	0	0	0	%100
82	M95B	Z	4.178	4.178	0	%100
83	M96A	X	0	0	0	%100
84	M96A	Z	16.712	16.712	0	%100

**Member Distributed Loads (BLC 48 : Structure Wo (210 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
1	M1	X	-1.853	-1.853	0	%100
2	M1	Z	3.209	3.209	0	%100
3	M2	X	-.736	-.736	0	%100
4	M2	Z	1.274	1.274	0	%100
5	FACE	X	-12.261	-12.261	0	%100
6	FACE	Z	21.237	21.237	0	%100
7	M17	X	-10.526	-10.526	0	%100
8	M17	Z	18.232	18.232	0	%100
9	M8	X	-12.261	-12.261	0	%100
10	M8	Z	21.237	21.237	0	%100
11	M9	X	0	0	0	%100
12	M9	Z	0	0	0	%100
13	M9A	X	-2.095	-2.095	0	%100
14	M9A	Z	3.628	3.628	0	%100
15	M10	X	-2.095	-2.095	0	%100
16	M10	Z	3.628	3.628	0	%100
17	M11	X	-1.853	-1.853	0	%100
18	M11	Z	3.209	3.209	0	%100
19	M12	X	-7.411	-7.411	0	%100
20	M12	Z	12.836	12.836	0	%100
21	M15	X	-.736	-.736	0	%100
22	M15	Z	1.274	1.274	0	%100
23	M17A	X	0	0	0	%100
24	M17A	Z	0	0	0	%100
25	OVP	X	-4.23	-4.23	0	%100
26	OVP	Z	7.327	7.327	0	%100
27	MP1A	X	-4.659	-4.659	0	%100
28	MP1A	Z	8.07	8.07	0	%100
29	MP6A	X	-4.659	-4.659	0	%100
30	MP6A	Z	8.07	8.07	0	%100
31	MP2A	X	-4.659	-4.659	0	%100
32	MP2A	Z	8.07	8.07	0	%100
33	MP3A	X	-5.64	-5.64	0	%100
34	MP3A	Z	9.769	9.769	0	%100

**Member Distributed Loads (BLC 48 : Structure Wo (210 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
35	MP4A	X	-4.659	-4.659	0 %100
36	MP4A	Z	8.07	8.07	0 %100
37	MP5A	X	-4.659	-4.659	0 %100
38	MP5A	Z	8.07	8.07	0 %100
39	MP1C	X	-4.659	-4.659	0 %100
40	MP1C	Z	8.07	8.07	0 %100
41	MP6C	X	-4.659	-4.659	0 %100
42	MP6C	Z	8.07	8.07	0 %100
43	MP2C	X	-4.659	-4.659	0 %100
44	MP2C	Z	8.07	8.07	0 %100
45	MP3C	X	-5.64	-5.64	0 %100
46	MP3C	Z	9.769	9.769	0 %100
47	MP4C	X	-4.659	-4.659	0 %100
48	MP4C	Z	8.07	8.07	0 %100
49	MP5C	X	-4.659	-4.659	0 %100
50	MP5C	Z	8.07	8.07	0 %100
51	MP1B	X	-4.659	-4.659	0 %100
52	MP1B	Z	8.07	8.07	0 %100
53	MP6B	X	-4.028	-4.028	0 %100
54	MP6B	Z	6.977	6.977	0 %100
55	MP2B	X	-4.659	-4.659	0 %100
56	MP2B	Z	8.07	8.07	0 %100
57	MP3B	X	-5.64	-5.64	0 %100
58	MP3B	Z	9.769	9.769	0 %100
59	MP4B	X	-4.659	-4.659	0 %100
60	MP4B	Z	8.07	8.07	0 %100
61	MP5B	X	-4.659	-4.659	0 %100
62	MP5B	Z	8.07	8.07	0 %100
63	M80A	X	-4.23	-4.23	0 %100
64	M80A	Z	7.327	7.327	0 %100
65	M81A	X	0	0	0 %100
66	M81A	Z	0	0	0 %100
67	M88	X	-5.286	-5.286	0 %100
68	M88	Z	9.156	9.156	0 %100
69	M95A	X	0	0	0 %100
70	M95A	Z	0	0	0 %100
71	M102	X	-5.286	-5.286	0 %100
72	M102	Z	9.156	9.156	0 %100
73	M91	X	-6.607	-6.607	0 %100
74	M91	Z	11.443	11.443	0 %100
75	M92	X	-6.607	-6.607	0 %100
76	M92	Z	11.443	11.443	0 %100
77	M93	X	-8.991	-8.991	0 %100
78	M93	Z	15.573	15.573	0 %100
79	M94A	X	-6.267	-6.267	0 %100
80	M94A	Z	10.855	10.855	0 %100
81	M95B	X	0	0	0 %100
82	M95B	Z	0	0	0 %100
83	M96A	X	-6.267	-6.267	0 %100
84	M96A	Z	10.855	10.855	0 %100

**Member Distributed Loads (BLC 49 : Structure Wo (240 Deg))**

Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	-9.627	-9.627	0 %100
2	M1	Z	5.558	5.558	0 %100
3	M2	X	-4.25	-4.25	0 %100
4	M2	Z	.245	.245	0 %100
5	FACE	X	-7.079	-7.079	0 %100



**Member Distributed Loads (BLC 49 : Structure Wo (240 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft, %]	End Location[ft, %]
65	M81A	X	-2.442	-2.442	0 %100
66	M81A	Z	1.41	1.41	0 %100
67	M88	X	-12.208	-12.208	0 %100
68	M88	Z	7.048	7.048	0 %100
69	M95A	X	-3.052	-3.052	0 %100
70	M95A	Z	1.762	1.762	0 %100
71	M102	X	-3.052	-3.052	0 %100
72	M102	Z	1.762	1.762	0 %100
73	M91	X	-14.197	-14.197	0 %100
74	M91	Z	8.196	8.196	0 %100
75	M92	X	-10.066	-10.066	0 %100
76	M92	Z	5.812	5.812	0 %100
77	M93	X	-14.197	-14.197	0 %100
78	M93	Z	8.196	8.196	0 %100
79	M94A	X	-14.473	-14.473	0 %100
80	M94A	Z	8.356	8.356	0 %100
81	M95B	X	-3.618	-3.618	0 %100
82	M95B	Z	2.089	2.089	0 %100
83	M96A	X	-3.618	-3.618	0 %100
84	M96A	Z	2.089	2.089	0 %100

**Member Distributed Loads (BLC 50 : Structure Wo (270 Deg))**

Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft, %]	End Location[ft, %]
1	M1	X	-14.822	-14.822	0 %100
2	M1	Z	0	0	0 %100
3	M2	X	0	0	0 %100
4	M2	Z	0	0	0 %100
5	FACE	X	0	0	0 %100
6	FACE	Z	0	0	0 %100
7	M17	X	0	0	0 %100
8	M17	Z	0	0	0 %100
9	M8	X	-24.522	-24.522	0 %100
10	M8	Z	0	0	0 %100
11	M9	X	-24.522	-24.522	0 %100
12	M9	Z	0	0	0 %100
13	M9A	X	-16.757	-16.757	0 %100
14	M9A	Z	0	0	0 %100
15	M10	X	-16.757	-16.757	0 %100
16	M10	Z	0	0	0 %100
17	M11	X	-3.706	-3.706	0 %100
18	M11	Z	0	0	0 %100
19	M12	X	-3.706	-3.706	0 %100
20	M12	Z	0	0	0 %100
21	M15	X	-1.471	-1.471	0 %100
22	M15	Z	0	0	0 %100
23	M17A	X	-1.471	-1.471	0 %100
24	M17A	Z	0	0	0 %100
25	OVP	X	0	0	0 %100
26	OVP	Z	0	0	0 %100
27	MP1A	X	-9.318	-9.318	0 %100
28	MP1A	Z	0	0	0 %100
29	MP6A	X	-9.318	-9.318	0 %100
30	MP6A	Z	0	0	0 %100
31	MP2A	X	-9.318	-9.318	0 %100
32	MP2A	Z	0	0	0 %100
33	MP3A	X	-11.28	-11.28	0 %100
34	MP3A	Z	0	0	0 %100
35	MP4A	X	-9.318	-9.318	0 %100



**Member Distributed Loads (BLC 50 : Structure Wo (270 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
36	MP4A	Z	0	0	0	%100
37	MP5A	X	-9.318	-9.318	0	%100
38	MP5A	Z	0	0	0	%100
39	MP1C	X	-9.318	-9.318	0	%100
40	MP1C	Z	0	0	0	%100
41	MP6C	X	-9.318	-9.318	0	%100
42	MP6C	Z	0	0	0	%100
43	MP2C	X	-9.318	-9.318	0	%100
44	MP2C	Z	0	0	0	%100
45	MP3C	X	-11.28	-11.28	0	%100
46	MP3C	Z	0	0	0	%100
47	MP4C	X	-9.318	-9.318	0	%100
48	MP4C	Z	0	0	0	%100
49	MP5C	X	-9.318	-9.318	0	%100
50	MP5C	Z	0	0	0	%100
51	MP1B	X	-9.318	-9.318	0	%100
52	MP1B	Z	0	0	0	%100
53	MP6B	X	-8.056	-8.056	0	%100
54	MP6B	Z	0	0	0	%100
55	MP2B	X	-9.318	-9.318	0	%100
56	MP2B	Z	0	0	0	%100
57	MP3B	X	-11.28	-11.28	0	%100
58	MP3B	Z	0	0	0	%100
59	MP4B	X	-9.318	-9.318	0	%100
60	MP4B	Z	0	0	0	%100
61	MP5B	X	-9.318	-9.318	0	%100
62	MP5B	Z	0	0	0	%100
63	M80A	X	-8.46	-8.46	0	%100
64	M80A	Z	0	0	0	%100
65	M81A	X	-8.46	-8.46	0	%100
66	M81A	Z	0	0	0	%100
67	M88	X	-10.573	-10.573	0	%100
68	M88	Z	0	0	0	%100
69	M95A	X	-10.572	-10.572	0	%100
70	M95A	Z	0	0	0	%100
71	M102	X	0	0	0	%100
72	M102	Z	0	0	0	%100
73	M91	X	-17.983	-17.983	0	%100
74	M91	Z	0	0	0	%100
75	M92	X	-13.213	-13.213	0	%100
76	M92	Z	0	0	0	%100
77	M93	X	-13.213	-13.213	0	%100
78	M93	Z	0	0	0	%100
79	M94A	X	-12.534	-12.534	0	%100
80	M94A	Z	0	0	0	%100
81	M95B	X	-12.534	-12.534	0	%100
82	M95B	Z	0	0	0	%100
83	M96A	X	0	0	0	%100
84	M96A	Z	0	0	0	%100

**Member Distributed Loads (BLC 51 : Structure Wo (300 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	-9.627	-9.627	0	%100
2	M1	Z	-5.558	-5.558	0	%100
3	M2	X	-.425	-.425	0	%100
4	M2	Z	-.245	-.245	0	%100
5	FACE	X	-7.079	-7.079	0	%100
6	FACE	Z	-4.087	-4.087	0	%100



**Member Distributed Loads (BLC 51 : Structure Wo (300 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
7	M17	X	-6.077	-6.077	0	%100
8	M17	Z	-3.509	-3.509	0	%100
9	M8	X	-7.079	-7.079	0	%100
10	M8	Z	-4.087	-4.087	0	%100
11	M9	X	-28.315	-28.315	0	%100
12	M9	Z	-16.348	-16.348	0	%100
13	M9A	X	-10.884	-10.884	0	%100
14	M9A	Z	-6.284	-6.284	0	%100
15	M10	X	-10.884	-10.884	0	%100
16	M10	Z	-6.284	-6.284	0	%100
17	M11	X	-9.627	-9.627	0	%100
18	M11	Z	-5.558	-5.558	0	%100
19	M12	X	0	0	0	%100
20	M12	Z	0	0	0	%100
21	M15	X	-.425	-.425	0	%100
22	M15	Z	-.245	-.245	0	%100
23	M17A	X	-1.699	-1.699	0	%100
24	M17A	Z	-.981	-.981	0	%100
25	OVP	X	-2.442	-2.442	0	%100
26	OVP	Z	-1.41	-1.41	0	%100
27	MP1A	X	-8.07	-8.07	0	%100
28	MP1A	Z	-4.659	-4.659	0	%100
29	MP6A	X	-8.07	-8.07	0	%100
30	MP6A	Z	-4.659	-4.659	0	%100
31	MP2A	X	-8.07	-8.07	0	%100
32	MP2A	Z	-4.659	-4.659	0	%100
33	MP3A	X	-9.769	-9.769	0	%100
34	MP3A	Z	-5.64	-5.64	0	%100
35	MP4A	X	-8.07	-8.07	0	%100
36	MP4A	Z	-4.659	-4.659	0	%100
37	MP5A	X	-8.07	-8.07	0	%100
38	MP5A	Z	-4.659	-4.659	0	%100
39	MP1C	X	-8.07	-8.07	0	%100
40	MP1C	Z	-4.659	-4.659	0	%100
41	MP6C	X	-8.07	-8.07	0	%100
42	MP6C	Z	-4.659	-4.659	0	%100
43	MP2C	X	-8.07	-8.07	0	%100
44	MP2C	Z	-4.659	-4.659	0	%100
45	MP3C	X	-9.769	-9.769	0	%100
46	MP3C	Z	-5.64	-5.64	0	%100
47	MP4C	X	-8.07	-8.07	0	%100
48	MP4C	Z	-4.659	-4.659	0	%100
49	MP5C	X	-8.07	-8.07	0	%100
50	MP5C	Z	-4.659	-4.659	0	%100
51	MP1B	X	-8.07	-8.07	0	%100
52	MP1B	Z	-4.659	-4.659	0	%100
53	MP6B	X	-6.977	-6.977	0	%100
54	MP6B	Z	-4.028	-4.028	0	%100
55	MP2B	X	-8.07	-8.07	0	%100
56	MP2B	Z	-4.659	-4.659	0	%100
57	MP3B	X	-9.769	-9.769	0	%100
58	MP3B	Z	-5.64	-5.64	0	%100
59	MP4B	X	-8.07	-8.07	0	%100
60	MP4B	Z	-4.659	-4.659	0	%100
61	MP5B	X	-8.07	-8.07	0	%100
62	MP5B	Z	-4.659	-4.659	0	%100
63	M80A	X	-2.442	-2.442	0	%100
64	M80A	Z	-1.41	-1.41	0	%100
65	M81A	X	-9.769	-9.769	0	%100

**Member Distributed Loads (BLC 51 : Structure Wo (300 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
66	M81A	Z	-5.64	-5.64	0	%100
67	M88	X	-3.052	-3.052	0	%100
68	M88	Z	-1.762	-1.762	0	%100
69	M95A	X	-12.208	-12.208	0	%100
70	M95A	Z	-7.048	-7.048	0	%100
71	M102	X	-3.052	-3.052	0	%100
72	M102	Z	-1.762	-1.762	0	%100
73	M91	X	-14.197	-14.197	0	%100
74	M91	Z	-8.196	-8.196	0	%100
75	M92	X	-14.197	-14.197	0	%100
76	M92	Z	-8.196	-8.196	0	%100
77	M93	X	-10.066	-10.066	0	%100
78	M93	Z	-5.812	-5.812	0	%100
79	M94A	X	-3.618	-3.618	0	%100
80	M94A	Z	-2.089	-2.089	0	%100
81	M95B	X	-14.473	-14.473	0	%100
82	M95B	Z	-8.356	-8.356	0	%100
83	M96A	X	-3.618	-3.618	0	%100
84	M96A	Z	-2.089	-2.089	0	%100

**Member Distributed Loads (BLC 52 : Structure Wo (330 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
1	M1	X	-1.853	-1.853	0	%100
2	M1	Z	-3.209	-3.209	0	%100
3	M2	X	-.736	-.736	0	%100
4	M2	Z	-1.274	-1.274	0	%100
5	FACE	X	-12.261	-12.261	0	%100
6	FACE	Z	-21.237	-21.237	0	%100
7	M17	X	-10.526	-10.526	0	%100
8	M17	Z	-18.232	-18.232	0	%100
9	M8	X	0	0	0	%100
10	M8	Z	0	0	0	%100
11	M9	X	-12.261	-12.261	0	%100
12	M9	Z	-21.237	-21.237	0	%100
13	M9A	X	-2.095	-2.095	0	%100
14	M9A	Z	-3.628	-3.628	0	%100
15	M10	X	-2.095	-2.095	0	%100
16	M10	Z	-3.628	-3.628	0	%100
17	M11	X	-7.411	-7.411	0	%100
18	M11	Z	-12.836	-12.836	0	%100
19	M12	X	-1.853	-1.853	0	%100
20	M12	Z	-3.209	-3.209	0	%100
21	M15	X	0	0	0	%100
22	M15	Z	0	0	0	%100
23	M17A	X	-.736	-.736	0	%100
24	M17A	Z	-1.274	-1.274	0	%100
25	OVP	X	-4.23	-4.23	0	%100
26	OVP	Z	-7.327	-7.327	0	%100
27	MP1A	X	-4.659	-4.659	0	%100
28	MP1A	Z	-8.07	-8.07	0	%100
29	MP6A	X	-4.659	-4.659	0	%100
30	MP6A	Z	-8.07	-8.07	0	%100
31	MP2A	X	-4.659	-4.659	0	%100
32	MP2A	Z	-8.07	-8.07	0	%100
33	MP3A	X	-5.64	-5.64	0	%100
34	MP3A	Z	-9.769	-9.769	0	%100
35	MP4A	X	-4.659	-4.659	0	%100
36	MP4A	Z	-8.07	-8.07	0	%100

**Member Distributed Loads (BLC 52 : Structure Wo (330 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
37	MP5A	X	-4.659	-4.659	0	%100
38	MP5A	Z	-8.07	-8.07	0	%100
39	MP1C	X	-4.659	-4.659	0	%100
40	MP1C	Z	-8.07	-8.07	0	%100
41	MP6C	X	-4.659	-4.659	0	%100
42	MP6C	Z	-8.07	-8.07	0	%100
43	MP2C	X	-4.659	-4.659	0	%100
44	MP2C	Z	-8.07	-8.07	0	%100
45	MP3C	X	-5.64	-5.64	0	%100
46	MP3C	Z	-9.769	-9.769	0	%100
47	MP4C	X	-4.659	-4.659	0	%100
48	MP4C	Z	-8.07	-8.07	0	%100
49	MP5C	X	-4.659	-4.659	0	%100
50	MP5C	Z	-8.07	-8.07	0	%100
51	MP1B	X	-4.659	-4.659	0	%100
52	MP1B	Z	-8.07	-8.07	0	%100
53	MP6B	X	-4.028	-4.028	0	%100
54	MP6B	Z	-6.977	-6.977	0	%100
55	MP2B	X	-4.659	-4.659	0	%100
56	MP2B	Z	-8.07	-8.07	0	%100
57	MP3B	X	-5.64	-5.64	0	%100
58	MP3B	Z	-9.769	-9.769	0	%100
59	MP4B	X	-4.659	-4.659	0	%100
60	MP4B	Z	-8.07	-8.07	0	%100
61	MP5B	X	-4.659	-4.659	0	%100
62	MP5B	Z	-8.07	-8.07	0	%100
63	M80A	X	0	0	0	%100
64	M80A	Z	0	0	0	%100
65	M81A	X	-4.23	-4.23	0	%100
66	M81A	Z	-7.327	-7.327	0	%100
67	M88	X	0	0	0	%100
68	M88	Z	0	0	0	%100
69	M95A	X	-5.286	-5.286	0	%100
70	M95A	Z	-9.156	-9.156	0	%100
71	M102	X	-5.286	-5.286	0	%100
72	M102	Z	-9.156	-9.156	0	%100
73	M91	X	-6.607	-6.607	0	%100
74	M91	Z	-11.443	-11.443	0	%100
75	M92	X	-8.991	-8.991	0	%100
76	M92	Z	-15.573	-15.573	0	%100
77	M93	X	-6.607	-6.607	0	%100
78	M93	Z	-11.443	-11.443	0	%100
79	M94A	X	0	0	0	%100
80	M94A	Z	0	0	0	%100
81	M95B	X	-6.267	-6.267	0	%100
82	M95B	Z	-10.855	-10.855	0	%100
83	M96A	X	-6.267	-6.267	0	%100
84	M96A	Z	-10.855	-10.855	0	%100

**Member Distributed Loads (BLC 53 : Structure Wi (0 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	0	0	0	%100
2	M1	Z	0	0	0	%100
3	M2	X	0	0	0	%100
4	M2	Z	-1.306	-1.306	0	%100
5	FACE	X	0	0	0	%100
6	FACE	Z	-7.324	-7.324	0	%100
7	M17	X	0	0	0	%100

**Member Distributed Loads (BLC 53 : Structure Wi (0 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
8	M17	Z	-6.508	-6.508	0 %100
9	M8	X	0	0	0 %100
10	M8	Z	-1.831	-1.831	0 %100
11	M9	X	0	0	0 %100
12	M9	Z	-1.831	-1.831	0 %100
13	M9A	X	0	0	0 %100
14	M9A	Z	0	0	0 %100
15	M10	X	0	0	0 %100
16	M10	Z	0	0	0 %100
17	M11	X	0	0	0 %100
18	M11	Z	-3.127	-3.127	0 %100
19	M12	X	0	0	0 %100
20	M12	Z	-3.127	-3.127	0 %100
21	M15	X	0	0	0 %100
22	M15	Z	-0.326	-0.326	0 %100
23	M17A	X	0	0	0 %100
24	M17A	Z	-0.326	-0.326	0 %100
25	OVP	X	0	0	0 %100
26	OVP	Z	-3.544	-3.544	0 %100
27	MP1A	X	0	0	0 %100
28	MP1A	Z	-3.197	-3.197	0 %100
29	MP6A	X	0	0	0 %100
30	MP6A	Z	-3.197	-3.197	0 %100
31	MP2A	X	0	0	0 %100
32	MP2A	Z	-3.197	-3.197	0 %100
33	MP3A	X	0	0	0 %100
34	MP3A	Z	-3.544	-3.544	0 %100
35	MP4A	X	0	0	0 %100
36	MP4A	Z	-3.197	-3.197	0 %100
37	MP5A	X	0	0	0 %100
38	MP5A	Z	-3.197	-3.197	0 %100
39	MP1C	X	0	0	0 %100
40	MP1C	Z	-3.197	-3.197	0 %100
41	MP6C	X	0	0	0 %100
42	MP6C	Z	-3.197	-3.197	0 %100
43	MP2C	X	0	0	0 %100
44	MP2C	Z	-3.197	-3.197	0 %100
45	MP3C	X	0	0	0 %100
46	MP3C	Z	-3.544	-3.544	0 %100
47	MP4C	X	0	0	0 %100
48	MP4C	Z	-3.197	-3.197	0 %100
49	MP5C	X	0	0	0 %100
50	MP5C	Z	-3.197	-3.197	0 %100
51	MP1B	X	0	0	0 %100
52	MP1B	Z	-3.197	-3.197	0 %100
53	MP6B	X	0	0	0 %100
54	MP6B	Z	-2.795	-2.795	0 %100
55	MP2B	X	0	0	0 %100
56	MP2B	Z	-3.197	-3.197	0 %100
57	MP3B	X	0	0	0 %100
58	MP3B	Z	-3.544	-3.544	0 %100
59	MP4B	X	0	0	0 %100
60	MP4B	Z	-3.197	-3.197	0 %100
61	MP5B	X	0	0	0 %100
62	MP5B	Z	-3.197	-3.197	0 %100
63	M80A	X	0	0	0 %100
64	M80A	Z	-0.886	-0.886	0 %100
65	M81A	X	0	0	0 %100
66	M81A	Z	-0.886	-0.886	0 %100

**Member Distributed Loads (BLC 53 : Structure Wi (0 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
67	M88	X	0	0	%100
68	M88	Z	-909	-909	%100
69	M95A	X	0	0	%100
70	M95A	Z	-909	-909	%100
71	M102	X	0	0	%100
72	M102	Z	-3.635	-3.635	%100
73	M91	X	0	0	%100
74	M91	Z	-2.611	-2.611	%100
75	M92	X	0	0	%100
76	M92	Z	-4.198	-4.198	%100
77	M93	X	0	0	%100
78	M93	Z	-4.198	-4.198	%100
79	M94A	X	0	0	%100
80	M94A	Z	-1.101	-1.101	%100
81	M95B	X	0	0	%100
82	M95B	Z	-1.101	-1.101	%100
83	M96A	X	0	0	%100
84	M96A	Z	-4.404	-4.404	%100

**Member Distributed Loads (BLC 54 : Structure Wi (30 Deg))**

Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	.521	.521	%100
2	M1	Z	-903	-903	%100
3	M2	X	.49	.49	%100
4	M2	Z	-.848	-.848	%100
5	FACE	X	2.747	2.747	%100
6	FACE	Z	-4.757	-4.757	%100
7	M17	X	2.44	2.44	%100
8	M17	Z	-4.227	-4.227	%100
9	M8	X	2.747	2.747	%100
10	M8	Z	-4.757	-4.757	%100
11	M9	X	0	0	%100
12	M9	Z	0	0	%100
13	M9A	X	.564	.564	%100
14	M9A	Z	-.977	-.977	%100
15	M10	X	.564	.564	%100
16	M10	Z	-.977	-.977	%100
17	M11	X	.521	.521	%100
18	M11	Z	-.903	-.903	%100
19	M12	X	2.085	2.085	%100
20	M12	Z	-3.61	-3.61	%100
21	M15	X	.49	.49	%100
22	M15	Z	-.848	-.848	%100
23	M17A	X	0	0	%100
24	M17A	Z	0	0	%100
25	OVP	X	1.329	1.329	%100
26	OVP	Z	-2.302	-2.302	%100
27	MP1A	X	1.599	1.599	%100
28	MP1A	Z	-2.769	-2.769	%100
29	MP6A	X	1.599	1.599	%100
30	MP6A	Z	-2.769	-2.769	%100
31	MP2A	X	1.599	1.599	%100
32	MP2A	Z	-2.769	-2.769	%100
33	MP3A	X	1.772	1.772	%100
34	MP3A	Z	-3.069	-3.069	%100
35	MP4A	X	1.599	1.599	%100
36	MP4A	Z	-2.769	-2.769	%100
37	MP5A	X	1.599	1.599	%100



**Member Distributed Loads (BLC 54 : Structure Wi (30 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
38	MP5A	Z	-2.769	-2.769	0	%100
39	MP1C	X	1.599	1.599	0	%100
40	MP1C	Z	-2.769	-2.769	0	%100
41	MP6C	X	1.599	1.599	0	%100
42	MP6C	Z	-2.769	-2.769	0	%100
43	MP2C	X	1.599	1.599	0	%100
44	MP2C	Z	-2.769	-2.769	0	%100
45	MP3C	X	1.772	1.772	0	%100
46	MP3C	Z	-3.069	-3.069	0	%100
47	MP4C	X	1.599	1.599	0	%100
48	MP4C	Z	-2.769	-2.769	0	%100
49	MP5C	X	1.599	1.599	0	%100
50	MP5C	Z	-2.769	-2.769	0	%100
51	MP1B	X	1.599	1.599	0	%100
52	MP1B	Z	-2.769	-2.769	0	%100
53	MP6B	X	1.397	1.397	0	%100
54	MP6B	Z	-2.42	-2.42	0	%100
55	MP2B	X	1.599	1.599	0	%100
56	MP2B	Z	-2.769	-2.769	0	%100
57	MP3B	X	1.772	1.772	0	%100
58	MP3B	Z	-3.069	-3.069	0	%100
59	MP4B	X	1.599	1.599	0	%100
60	MP4B	Z	-2.769	-2.769	0	%100
61	MP5B	X	1.599	1.599	0	%100
62	MP5B	Z	-2.769	-2.769	0	%100
63	M80A	X	1.329	1.329	0	%100
64	M80A	Z	-2.302	-2.302	0	%100
65	M81A	X	0	0	0	%100
66	M81A	Z	0	0	0	%100
67	M88	X	1.363	1.363	0	%100
68	M88	Z	-2.361	-2.361	0	%100
69	M95A	X	0	0	0	%100
70	M95A	Z	0	0	0	%100
71	M102	X	1.363	1.363	0	%100
72	M102	Z	-2.361	-2.361	0	%100
73	M91	X	1.57	1.57	0	%100
74	M91	Z	-2.719	-2.719	0	%100
75	M92	X	1.57	1.57	0	%100
76	M92	Z	-2.719	-2.719	0	%100
77	M93	X	2.364	2.364	0	%100
78	M93	Z	-4.094	-4.094	0	%100
79	M94A	X	1.652	1.652	0	%100
80	M94A	Z	-2.861	-2.861	0	%100
81	M95B	X	0	0	0	%100
82	M95B	Z	0	0	0	%100
83	M96A	X	1.652	1.652	0	%100
84	M96A	Z	-2.861	-2.861	0	%100

**Member Distributed Loads (BLC 55 : Structure Wi (60 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	2.708	2.708	0	%100
2	M1	Z	-1.563	-1.563	0	%100
3	M2	X	.283	.283	0	%100
4	M2	Z	-.163	-.163	0	%100
5	FACE	X	1.586	1.586	0	%100
6	FACE	Z	-.916	-.916	0	%100
7	M17	X	1.409	1.409	0	%100
8	M17	Z	-.813	-.813	0	%100



**Member Distributed Loads (BLC 55 : Structure Wi (60 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
9	M8	X	6.343	6.343	0	%100
10	M8	Z	-3.662	-3.662	0	%100
11	M9	X	1.586	1.586	0	%100
12	M9	Z	-.916	-.916	0	%100
13	M9A	X	2.93	2.93	0	%100
14	M9A	Z	-1.691	-1.691	0	%100
15	M10	X	2.93	2.93	0	%100
16	M10	Z	-1.691	-1.691	0	%100
17	M11	X	0	0	0	%100
18	M11	Z	0	0	0	%100
19	M12	X	2.708	2.708	0	%100
20	M12	Z	-1.563	-1.563	0	%100
21	M15	X	1.131	1.131	0	%100
22	M15	Z	-.653	-.653	0	%100
23	M17A	X	.283	.283	0	%100
24	M17A	Z	-.163	-.163	0	%100
25	OVP	X	.767	.767	0	%100
26	OVP	Z	-.443	-.443	0	%100
27	MP1A	X	2.769	2.769	0	%100
28	MP1A	Z	-1.599	-1.599	0	%100
29	MP6A	X	2.769	2.769	0	%100
30	MP6A	Z	-1.599	-1.599	0	%100
31	MP2A	X	2.769	2.769	0	%100
32	MP2A	Z	-1.599	-1.599	0	%100
33	MP3A	X	3.069	3.069	0	%100
34	MP3A	Z	-1.772	-1.772	0	%100
35	MP4A	X	2.769	2.769	0	%100
36	MP4A	Z	-1.599	-1.599	0	%100
37	MP5A	X	2.769	2.769	0	%100
38	MP5A	Z	-1.599	-1.599	0	%100
39	MP1C	X	2.769	2.769	0	%100
40	MP1C	Z	-1.599	-1.599	0	%100
41	MP6C	X	2.769	2.769	0	%100
42	MP6C	Z	-1.599	-1.599	0	%100
43	MP2C	X	2.769	2.769	0	%100
44	MP2C	Z	-1.599	-1.599	0	%100
45	MP3C	X	3.069	3.069	0	%100
46	MP3C	Z	-1.772	-1.772	0	%100
47	MP4C	X	2.769	2.769	0	%100
48	MP4C	Z	-1.599	-1.599	0	%100
49	MP5C	X	2.769	2.769	0	%100
50	MP5C	Z	-1.599	-1.599	0	%100
51	MP1B	X	2.769	2.769	0	%100
52	MP1B	Z	-1.599	-1.599	0	%100
53	MP6B	X	2.42	2.42	0	%100
54	MP6B	Z	-1.397	-1.397	0	%100
55	MP2B	X	2.769	2.769	0	%100
56	MP2B	Z	-1.599	-1.599	0	%100
57	MP3B	X	3.069	3.069	0	%100
58	MP3B	Z	-1.772	-1.772	0	%100
59	MP4B	X	2.769	2.769	0	%100
60	MP4B	Z	-1.599	-1.599	0	%100
61	MP5B	X	2.769	2.769	0	%100
62	MP5B	Z	-1.599	-1.599	0	%100
63	M80A	X	3.069	3.069	0	%100
64	M80A	Z	-1.772	-1.772	0	%100
65	M81A	X	.767	.767	0	%100
66	M81A	Z	-.443	-.443	0	%100
67	M88	X	3.148	3.148	0	%100

**Member Distributed Loads (BLC 55 : Structure Wi (60 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
68	M88	Z	-1.817	-1.817	0	%100
69	M95A	X	.787	.787	0	%100
70	M95A	Z	-.454	-.454	0	%100
71	M102	X	.787	.787	0	%100
72	M102	Z	-.454	-.454	0	%100
73	M91	X	3.636	3.636	0	%100
74	M91	Z	-2.099	-2.099	0	%100
75	M92	X	2.261	2.261	0	%100
76	M92	Z	-1.305	-1.305	0	%100
77	M93	X	3.636	3.636	0	%100
78	M93	Z	-2.099	-2.099	0	%100
79	M94A	X	3.814	3.814	0	%100
80	M94A	Z	-2.202	-2.202	0	%100
81	M95B	X	.954	.954	0	%100
82	M95B	Z	-.551	-.551	0	%100
83	M96A	X	.954	.954	0	%100
84	M96A	Z	-.551	-.551	0	%100

**Member Distributed Loads (BLC 56 : Structure Wi (90 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
1	M1	X	4.169	4.169	0	%100
2	M1	Z	0	0	0	%100
3	M2	X	0	0	0	%100
4	M2	Z	0	0	0	%100
5	FACE	X	0	0	0	%100
6	FACE	Z	0	0	0	%100
7	M17	X	0	0	0	%100
8	M17	Z	0	0	0	%100
9	M8	X	5.493	5.493	0	%100
10	M8	Z	0	0	0	%100
11	M9	X	5.493	5.493	0	%100
12	M9	Z	0	0	0	%100
13	M9A	X	4.511	4.511	0	%100
14	M9A	Z	0	0	0	%100
15	M10	X	4.511	4.511	0	%100
16	M10	Z	0	0	0	%100
17	M11	X	1.042	1.042	0	%100
18	M11	Z	0	0	0	%100
19	M12	X	1.042	1.042	0	%100
20	M12	Z	0	0	0	%100
21	M15	X	.979	.979	0	%100
22	M15	Z	0	0	0	%100
23	M17A	X	.979	.979	0	%100
24	M17A	Z	0	0	0	%100
25	OVP	X	0	0	0	%100
26	OVP	Z	0	0	0	%100
27	MP1A	X	3.197	3.197	0	%100
28	MP1A	Z	0	0	0	%100
29	MP6A	X	3.197	3.197	0	%100
30	MP6A	Z	0	0	0	%100
31	MP2A	X	3.197	3.197	0	%100
32	MP2A	Z	0	0	0	%100
33	MP3A	X	3.544	3.544	0	%100
34	MP3A	Z	0	0	0	%100
35	MP4A	X	3.197	3.197	0	%100
36	MP4A	Z	0	0	0	%100
37	MP5A	X	3.197	3.197	0	%100
38	MP5A	Z	0	0	0	%100

**Member Distributed Loads (BLC 56 : Structure Wi (90 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
39	MP1C	X	3.197	3.197	0	%100
40	MP1C	Z	0	0	0	%100
41	MP6C	X	3.197	3.197	0	%100
42	MP6C	Z	0	0	0	%100
43	MP2C	X	3.197	3.197	0	%100
44	MP2C	Z	0	0	0	%100
45	MP3C	X	3.544	3.544	0	%100
46	MP3C	Z	0	0	0	%100
47	MP4C	X	3.197	3.197	0	%100
48	MP4C	Z	0	0	0	%100
49	MP5C	X	3.197	3.197	0	%100
50	MP5C	Z	0	0	0	%100
51	MP1B	X	3.197	3.197	0	%100
52	MP1B	Z	0	0	0	%100
53	MP6B	X	2.795	2.795	0	%100
54	MP6B	Z	0	0	0	%100
55	MP2B	X	3.197	3.197	0	%100
56	MP2B	Z	0	0	0	%100
57	MP3B	X	3.544	3.544	0	%100
58	MP3B	Z	0	0	0	%100
59	MP4B	X	3.197	3.197	0	%100
60	MP4B	Z	0	0	0	%100
61	MP5B	X	3.197	3.197	0	%100
62	MP5B	Z	0	0	0	%100
63	M80A	X	2.658	2.658	0	%100
64	M80A	Z	0	0	0	%100
65	M81A	X	2.658	2.658	0	%100
66	M81A	Z	0	0	0	%100
67	M88	X	2.726	2.726	0	%100
68	M88	Z	0	0	0	%100
69	M95A	X	2.726	2.726	0	%100
70	M95A	Z	0	0	0	%100
71	M102	X	0	0	0	%100
72	M102	Z	0	0	0	%100
73	M91	X	4.727	4.727	0	%100
74	M91	Z	0	0	0	%100
75	M92	X	3.14	3.14	0	%100
76	M92	Z	0	0	0	%100
77	M93	X	3.14	3.14	0	%100
78	M93	Z	0	0	0	%100
79	M94A	X	3.303	3.303	0	%100
80	M94A	Z	0	0	0	%100
81	M95B	X	3.303	3.303	0	%100
82	M95B	Z	0	0	0	%100
83	M96A	X	0	0	0	%100
84	M96A	Z	0	0	0	%100

**Member Distributed Loads (BLC 57 : Structure Wi (120 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	2.708	2.708	0	%100
2	M1	Z	1.563	1.563	0	%100
3	M2	X	.283	.283	0	%100
4	M2	Z	.163	.163	0	%100
5	FACE	X	1.586	1.586	0	%100
6	FACE	Z	.916	.916	0	%100
7	M17	X	1.409	1.409	0	%100
8	M17	Z	.813	.813	0	%100
9	M8	X	1.586	1.586	0	%100



**Member Distributed Loads (BLC 57 : Structure Wi (120 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
10	M8	Z	.916	.916	0 %100
11	M9	X	6.343	6.343	0 %100
12	M9	Z	3.662	3.662	0 %100
13	M9A	X	2.93	2.93	0 %100
14	M9A	Z	1.691	1.691	0 %100
15	M10	X	2.93	2.93	0 %100
16	M10	Z	1.691	1.691	0 %100
17	M11	X	2.708	2.708	0 %100
18	M11	Z	1.563	1.563	0 %100
19	M12	X	0	0	0 %100
20	M12	Z	0	0	0 %100
21	M15	X	.283	.283	0 %100
22	M15	Z	.163	.163	0 %100
23	M17A	X	1.131	1.131	0 %100
24	M17A	Z	.653	.653	0 %100
25	OVP	X	.767	.767	0 %100
26	OVP	Z	.443	.443	0 %100
27	MP1A	X	2.769	2.769	0 %100
28	MP1A	Z	1.599	1.599	0 %100
29	MP6A	X	2.769	2.769	0 %100
30	MP6A	Z	1.599	1.599	0 %100
31	MP2A	X	2.769	2.769	0 %100
32	MP2A	Z	1.599	1.599	0 %100
33	MP3A	X	3.069	3.069	0 %100
34	MP3A	Z	1.772	1.772	0 %100
35	MP4A	X	2.769	2.769	0 %100
36	MP4A	Z	1.599	1.599	0 %100
37	MP5A	X	2.769	2.769	0 %100
38	MP5A	Z	1.599	1.599	0 %100
39	MP1C	X	2.769	2.769	0 %100
40	MP1C	Z	1.599	1.599	0 %100
41	MP6C	X	2.769	2.769	0 %100
42	MP6C	Z	1.599	1.599	0 %100
43	MP2C	X	2.769	2.769	0 %100
44	MP2C	Z	1.599	1.599	0 %100
45	MP3C	X	3.069	3.069	0 %100
46	MP3C	Z	1.772	1.772	0 %100
47	MP4C	X	2.769	2.769	0 %100
48	MP4C	Z	1.599	1.599	0 %100
49	MP5C	X	2.769	2.769	0 %100
50	MP5C	Z	1.599	1.599	0 %100
51	MP1B	X	2.769	2.769	0 %100
52	MP1B	Z	1.599	1.599	0 %100
53	MP6B	X	2.42	2.42	0 %100
54	MP6B	Z	1.397	1.397	0 %100
55	MP2B	X	2.769	2.769	0 %100
56	MP2B	Z	1.599	1.599	0 %100
57	MP3B	X	3.069	3.069	0 %100
58	MP3B	Z	1.772	1.772	0 %100
59	MP4B	X	2.769	2.769	0 %100
60	MP4B	Z	1.599	1.599	0 %100
61	MP5B	X	2.769	2.769	0 %100
62	MP5B	Z	1.599	1.599	0 %100
63	M80A	X	.767	.767	0 %100
64	M80A	Z	.443	.443	0 %100
65	M81A	X	3.069	3.069	0 %100
66	M81A	Z	1.772	1.772	0 %100
67	M88	X	.787	.787	0 %100
68	M88	Z	.454	.454	0 %100

**Member Distributed Loads (BLC 57 : Structure Wi (120 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
69	M95A	X	3.148	3.148	0	%100
70	M95A	Z	1.817	1.817	0	%100
71	M102	X	.787	.787	0	%100
72	M102	Z	.454	.454	0	%100
73	M91	X	3.636	3.636	0	%100
74	M91	Z	2.099	2.099	0	%100
75	M92	X	3.636	3.636	0	%100
76	M92	Z	2.099	2.099	0	%100
77	M93	X	2.261	2.261	0	%100
78	M93	Z	1.305	1.305	0	%100
79	M94A	X	.954	.954	0	%100
80	M94A	Z	.551	.551	0	%100
81	M95B	X	3.814	3.814	0	%100
82	M95B	Z	2.202	2.202	0	%100
83	M96A	X	.954	.954	0	%100
84	M96A	Z	.551	.551	0	%100

**Member Distributed Loads (BLC 58 : Structure Wi (150 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	.521	.521	0	%100
2	M1	Z	.903	.903	0	%100
3	M2	X	.49	.49	0	%100
4	M2	Z	.848	.848	0	%100
5	FACE	X	2.747	2.747	0	%100
6	FACE	Z	4.757	4.757	0	%100
7	M17	X	2.44	2.44	0	%100
8	M17	Z	4.227	4.227	0	%100
9	M8	X	0	0	0	%100
10	M8	Z	0	0	0	%100
11	M9	X	2.747	2.747	0	%100
12	M9	Z	4.757	4.757	0	%100
13	M9A	X	.564	.564	0	%100
14	M9A	Z	.977	.977	0	%100
15	M10	X	.564	.564	0	%100
16	M10	Z	.977	.977	0	%100
17	M11	X	2.085	2.085	0	%100
18	M11	Z	3.61	3.61	0	%100
19	M12	X	.521	.521	0	%100
20	M12	Z	.903	.903	0	%100
21	M15	X	0	0	0	%100
22	M15	Z	0	0	0	%100
23	M17A	X	.49	.49	0	%100
24	M17A	Z	.848	.848	0	%100
25	OVP	X	1.329	1.329	0	%100
26	OVP	Z	2.302	2.302	0	%100
27	MP1A	X	1.599	1.599	0	%100
28	MP1A	Z	2.769	2.769	0	%100
29	MP6A	X	1.599	1.599	0	%100
30	MP6A	Z	2.769	2.769	0	%100
31	MP2A	X	1.599	1.599	0	%100
32	MP2A	Z	2.769	2.769	0	%100
33	MP3A	X	1.772	1.772	0	%100
34	MP3A	Z	3.069	3.069	0	%100
35	MP4A	X	1.599	1.599	0	%100
36	MP4A	Z	2.769	2.769	0	%100
37	MP5A	X	1.599	1.599	0	%100
38	MP5A	Z	2.769	2.769	0	%100
39	MP1C	X	1.599	1.599	0	%100



**Member Distributed Loads (BLC 58 : Structure Wi (150 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
40	MP1C	Z	2.769	2.769	0 %100
41	MP6C	X	1.599	1.599	0 %100
42	MP6C	Z	2.769	2.769	0 %100
43	MP2C	X	1.599	1.599	0 %100
44	MP2C	Z	2.769	2.769	0 %100
45	MP3C	X	1.772	1.772	0 %100
46	MP3C	Z	3.069	3.069	0 %100
47	MP4C	X	1.599	1.599	0 %100
48	MP4C	Z	2.769	2.769	0 %100
49	MP5C	X	1.599	1.599	0 %100
50	MP5C	Z	2.769	2.769	0 %100
51	MP1B	X	1.599	1.599	0 %100
52	MP1B	Z	2.769	2.769	0 %100
53	MP6B	X	1.397	1.397	0 %100
54	MP6B	Z	2.42	2.42	0 %100
55	MP2B	X	1.599	1.599	0 %100
56	MP2B	Z	2.769	2.769	0 %100
57	MP3B	X	1.772	1.772	0 %100
58	MP3B	Z	3.069	3.069	0 %100
59	MP4B	X	1.599	1.599	0 %100
60	MP4B	Z	2.769	2.769	0 %100
61	MP5B	X	1.599	1.599	0 %100
62	MP5B	Z	2.769	2.769	0 %100
63	M80A	X	0	0	0 %100
64	M80A	Z	0	0	0 %100
65	M81A	X	1.329	1.329	0 %100
66	M81A	Z	2.302	2.302	0 %100
67	M88	X	0	0	0 %100
68	M88	Z	0	0	0 %100
69	M95A	X	1.363	1.363	0 %100
70	M95A	Z	2.361	2.361	0 %100
71	M102	X	1.363	1.363	0 %100
72	M102	Z	2.361	2.361	0 %100
73	M91	X	1.57	1.57	0 %100
74	M91	Z	2.719	2.719	0 %100
75	M92	X	2.364	2.364	0 %100
76	M92	Z	4.094	4.094	0 %100
77	M93	X	1.57	1.57	0 %100
78	M93	Z	2.719	2.719	0 %100
79	M94A	X	0	0	0 %100
80	M94A	Z	0	0	0 %100
81	M95B	X	1.652	1.652	0 %100
82	M95B	Z	2.861	2.861	0 %100
83	M96A	X	1.652	1.652	0 %100
84	M96A	Z	2.861	2.861	0 %100

**Member Distributed Loads (BLC 59 : Structure Wi (180 Deg))**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
1	M1	X	0	0	0 %100
2	M1	Z	0	0	0 %100
3	M2	X	0	0	0 %100
4	M2	Z	1.306	1.306	0 %100
5	FACE	X	0	0	0 %100
6	FACE	Z	7.324	7.324	0 %100
7	M17	X	0	0	0 %100
8	M17	Z	6.508	6.508	0 %100
9	M8	X	0	0	0 %100
10	M8	Z	1.831	1.831	0 %100



**Member Distributed Loads (BLC 59 : Structure Wi (180 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
11	M9	X	0	0	%100
12	M9	Z	1.831	1.831	%100
13	M9A	X	0	0	%100
14	M9A	Z	0	0	%100
15	M10	X	0	0	%100
16	M10	Z	0	0	%100
17	M11	X	0	0	%100
18	M11	Z	3.127	3.127	%100
19	M12	X	0	0	%100
20	M12	Z	3.127	3.127	%100
21	M15	X	0	0	%100
22	M15	Z	.326	.326	%100
23	M17A	X	0	0	%100
24	M17A	Z	.326	.326	%100
25	OVP	X	0	0	%100
26	OVP	Z	3.544	3.544	%100
27	MP1A	X	0	0	%100
28	MP1A	Z	3.197	3.197	%100
29	MP6A	X	0	0	%100
30	MP6A	Z	3.197	3.197	%100
31	MP2A	X	0	0	%100
32	MP2A	Z	3.197	3.197	%100
33	MP3A	X	0	0	%100
34	MP3A	Z	3.544	3.544	%100
35	MP4A	X	0	0	%100
36	MP4A	Z	3.197	3.197	%100
37	MP5A	X	0	0	%100
38	MP5A	Z	3.197	3.197	%100
39	MP1C	X	0	0	%100
40	MP1C	Z	3.197	3.197	%100
41	MP6C	X	0	0	%100
42	MP6C	Z	3.197	3.197	%100
43	MP2C	X	0	0	%100
44	MP2C	Z	3.197	3.197	%100
45	MP3C	X	0	0	%100
46	MP3C	Z	3.544	3.544	%100
47	MP4C	X	0	0	%100
48	MP4C	Z	3.197	3.197	%100
49	MP5C	X	0	0	%100
50	MP5C	Z	3.197	3.197	%100
51	MP1B	X	0	0	%100
52	MP1B	Z	3.197	3.197	%100
53	MP6B	X	0	0	%100
54	MP6B	Z	2.795	2.795	%100
55	MP2B	X	0	0	%100
56	MP2B	Z	3.197	3.197	%100
57	MP3B	X	0	0	%100
58	MP3B	Z	3.544	3.544	%100
59	MP4B	X	0	0	%100
60	MP4B	Z	3.197	3.197	%100
61	MP5B	X	0	0	%100
62	MP5B	Z	3.197	3.197	%100
63	M80A	X	0	0	%100
64	M80A	Z	.886	.886	%100
65	M81A	X	0	0	%100
66	M81A	Z	.886	.886	%100
67	M88	X	0	0	%100
68	M88	Z	.909	.909	%100
69	M95A	X	0	0	%100

**Member Distributed Loads (BLC 59 : Structure Wi (180 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
70	M95A	Z	.909	.909	0 %100
71	M102	X	0	0	0 %100
72	M102	Z	3.635	3.635	0 %100
73	M91	X	0	0	0 %100
74	M91	Z	2.611	2.611	0 %100
75	M92	X	0	0	0 %100
76	M92	Z	4.198	4.198	0 %100
77	M93	X	0	0	0 %100
78	M93	Z	4.198	4.198	0 %100
79	M94A	X	0	0	0 %100
80	M94A	Z	1.101	1.101	0 %100
81	M95B	X	0	0	0 %100
82	M95B	Z	1.101	1.101	0 %100
83	M96A	X	0	0	0 %100
84	M96A	Z	4.404	4.404	0 %100

**Member Distributed Loads (BLC 60 : Structure Wi (210 Deg))**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
1	M1	X	-.521	-.521	0 %100
2	M1	Z	.903	.903	0 %100
3	M2	X	-.49	-.49	0 %100
4	M2	Z	.848	.848	0 %100
5	FACE	X	-2.747	-2.747	0 %100
6	FACE	Z	4.757	4.757	0 %100
7	M17	X	-2.44	-2.44	0 %100
8	M17	Z	4.227	4.227	0 %100
9	M8	X	-2.747	-2.747	0 %100
10	M8	Z	4.757	4.757	0 %100
11	M9	X	0	0	0 %100
12	M9	Z	0	0	0 %100
13	M9A	X	-.564	-.564	0 %100
14	M9A	Z	.977	.977	0 %100
15	M10	X	-.564	-.564	0 %100
16	M10	Z	.977	.977	0 %100
17	M11	X	-.521	-.521	0 %100
18	M11	Z	.903	.903	0 %100
19	M12	X	-2.085	-2.085	0 %100
20	M12	Z	3.61	3.61	0 %100
21	M15	X	-.49	-.49	0 %100
22	M15	Z	.848	.848	0 %100
23	M17A	X	0	0	0 %100
24	M17A	Z	0	0	0 %100
25	OVP	X	-1.329	-1.329	0 %100
26	OVP	Z	2.302	2.302	0 %100
27	MP1A	X	-1.599	-1.599	0 %100
28	MP1A	Z	2.769	2.769	0 %100
29	MP6A	X	-1.599	-1.599	0 %100
30	MP6A	Z	2.769	2.769	0 %100
31	MP2A	X	-1.599	-1.599	0 %100
32	MP2A	Z	2.769	2.769	0 %100
33	MP3A	X	-1.772	-1.772	0 %100
34	MP3A	Z	3.069	3.069	0 %100
35	MP4A	X	-1.599	-1.599	0 %100
36	MP4A	Z	2.769	2.769	0 %100
37	MP5A	X	-1.599	-1.599	0 %100
38	MP5A	Z	2.769	2.769	0 %100
39	MP1C	X	-1.599	-1.599	0 %100
40	MP1C	Z	2.769	2.769	0 %100

**Member Distributed Loads (BLC 60 : Structure Wi (210 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft. %]	End Location[ft. %]
41	MP6C	X	-1.599	-1.599	0	%100
42	MP6C	Z	2.769	2.769	0	%100
43	MP2C	X	-1.599	-1.599	0	%100
44	MP2C	Z	2.769	2.769	0	%100
45	MP3C	X	-1.772	-1.772	0	%100
46	MP3C	Z	3.069	3.069	0	%100
47	MP4C	X	-1.599	-1.599	0	%100
48	MP4C	Z	2.769	2.769	0	%100
49	MP5C	X	-1.599	-1.599	0	%100
50	MP5C	Z	2.769	2.769	0	%100
51	MP1B	X	-1.599	-1.599	0	%100
52	MP1B	Z	2.769	2.769	0	%100
53	MP6B	X	-1.397	-1.397	0	%100
54	MP6B	Z	2.42	2.42	0	%100
55	MP2B	X	-1.599	-1.599	0	%100
56	MP2B	Z	2.769	2.769	0	%100
57	MP3B	X	-1.772	-1.772	0	%100
58	MP3B	Z	3.069	3.069	0	%100
59	MP4B	X	-1.599	-1.599	0	%100
60	MP4B	Z	2.769	2.769	0	%100
61	MP5B	X	-1.599	-1.599	0	%100
62	MP5B	Z	2.769	2.769	0	%100
63	M80A	X	-1.329	-1.329	0	%100
64	M80A	Z	2.302	2.302	0	%100
65	M81A	X	0	0	0	%100
66	M81A	Z	0	0	0	%100
67	M88	X	-1.363	-1.363	0	%100
68	M88	Z	2.361	2.361	0	%100
69	M95A	X	0	0	0	%100
70	M95A	Z	0	0	0	%100
71	M102	X	-1.363	-1.363	0	%100
72	M102	Z	2.361	2.361	0	%100
73	M91	X	-1.57	-1.57	0	%100
74	M91	Z	2.719	2.719	0	%100
75	M92	X	-1.57	-1.57	0	%100
76	M92	Z	2.719	2.719	0	%100
77	M93	X	-2.364	-2.364	0	%100
78	M93	Z	4.094	4.094	0	%100
79	M94A	X	-1.652	-1.652	0	%100
80	M94A	Z	2.861	2.861	0	%100
81	M95B	X	0	0	0	%100
82	M95B	Z	0	0	0	%100
83	M96A	X	-1.652	-1.652	0	%100
84	M96A	Z	2.861	2.861	0	%100

**Member Distributed Loads (BLC 61 : Structure Wi (240 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft. %]	End Location[ft. %]
1	M1	X	-2.708	-2.708	0	%100
2	M1	Z	1.563	1.563	0	%100
3	M2	X	-.283	-.283	0	%100
4	M2	Z	.163	.163	0	%100
5	FACE	X	-1.586	-1.586	0	%100
6	FACE	Z	.916	.916	0	%100
7	M17	X	-1.409	-1.409	0	%100
8	M17	Z	.813	.813	0	%100
9	M8	X	-6.343	-6.343	0	%100
10	M8	Z	3.662	3.662	0	%100
11	M9	X	-1.586	-1.586	0	%100

**Member Distributed Loads (BLC 61 : Structure Wi (240 Deg)) (Continued)**

Member Label	Direction	Start Magnitude lb/ft....	End Magnitude lb/ft....	Start Location ft.%	End Location ft.%
12	M9	Z	.916	.916	0 %100
13	M9A	X	-2.93	-2.93	0 %100
14	M9A	Z	1.691	1.691	0 %100
15	M10	X	-2.93	-2.93	0 %100
16	M10	Z	1.691	1.691	0 %100
17	M11	X	0	0	0 %100
18	M11	Z	0	0	0 %100
19	M12	X	-2.708	-2.708	0 %100
20	M12	Z	1.563	1.563	0 %100
21	M15	X	-1.131	-1.131	0 %100
22	M15	Z	.653	.653	0 %100
23	M17A	X	-.283	-.283	0 %100
24	M17A	Z	.163	.163	0 %100
25	OVP	X	-.767	-.767	0 %100
26	OVP	Z	.443	.443	0 %100
27	MP1A	X	-2.769	-2.769	0 %100
28	MP1A	Z	1.599	1.599	0 %100
29	MP6A	X	-2.769	-2.769	0 %100
30	MP6A	Z	1.599	1.599	0 %100
31	MP2A	X	-2.769	-2.769	0 %100
32	MP2A	Z	1.599	1.599	0 %100
33	MP3A	X	-3.069	-3.069	0 %100
34	MP3A	Z	1.772	1.772	0 %100
35	MP4A	X	-2.769	-2.769	0 %100
36	MP4A	Z	1.599	1.599	0 %100
37	MP5A	X	-2.769	-2.769	0 %100
38	MP5A	Z	1.599	1.599	0 %100
39	MP1C	X	-2.769	-2.769	0 %100
40	MP1C	Z	1.599	1.599	0 %100
41	MP6C	X	-2.769	-2.769	0 %100
42	MP6C	Z	1.599	1.599	0 %100
43	MP2C	X	-2.769	-2.769	0 %100
44	MP2C	Z	1.599	1.599	0 %100
45	MP3C	X	-3.069	-3.069	0 %100
46	MP3C	Z	1.772	1.772	0 %100
47	MP4C	X	-2.769	-2.769	0 %100
48	MP4C	Z	1.599	1.599	0 %100
49	MP5C	X	-2.769	-2.769	0 %100
50	MP5C	Z	1.599	1.599	0 %100
51	MP1B	X	-2.769	-2.769	0 %100
52	MP1B	Z	1.599	1.599	0 %100
53	MP6B	X	-2.42	-2.42	0 %100
54	MP6B	Z	1.397	1.397	0 %100
55	MP2B	X	-2.769	-2.769	0 %100
56	MP2B	Z	1.599	1.599	0 %100
57	MP3B	X	-3.069	-3.069	0 %100
58	MP3B	Z	1.772	1.772	0 %100
59	MP4B	X	-2.769	-2.769	0 %100
60	MP4B	Z	1.599	1.599	0 %100
61	MP5B	X	-2.769	-2.769	0 %100
62	MP5B	Z	1.599	1.599	0 %100
63	M80A	X	-3.069	-3.069	0 %100
64	M80A	Z	1.772	1.772	0 %100
65	M81A	X	-.767	-.767	0 %100
66	M81A	Z	.443	.443	0 %100
67	M88	X	-3.148	-3.148	0 %100
68	M88	Z	1.817	1.817	0 %100
69	M95A	X	-.787	-.787	0 %100
70	M95A	Z	.454	.454	0 %100

**Member Distributed Loads (BLC 61 : Structure Wi (240 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
71	M102	X	- .787	- .787	0	%100
72	M102	Z	.454	.454	0	%100
73	M91	X	-3.636	-3.636	0	%100
74	M91	Z	2.099	2.099	0	%100
75	M92	X	-2.261	-2.261	0	%100
76	M92	Z	1.305	1.305	0	%100
77	M93	X	-3.636	-3.636	0	%100
78	M93	Z	2.099	2.099	0	%100
79	M94A	X	-3.814	-3.814	0	%100
80	M94A	Z	2.202	2.202	0	%100
81	M95B	X	-.954	-.954	0	%100
82	M95B	Z	.551	.551	0	%100
83	M96A	X	-.954	-.954	0	%100
84	M96A	Z	.551	.551	0	%100

**Member Distributed Loads (BLC 62 : Structure Wi (270 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	-4.169	-4.169	0	%100
2	M1	Z	0	0	0	%100
3	M2	X	0	0	0	%100
4	M2	Z	0	0	0	%100
5	FACE	X	0	0	0	%100
6	FACE	Z	0	0	0	%100
7	M17	X	0	0	0	%100
8	M17	Z	0	0	0	%100
9	M8	X	-5.493	-5.493	0	%100
10	M8	Z	0	0	0	%100
11	M9	X	-5.493	-5.493	0	%100
12	M9	Z	0	0	0	%100
13	M9A	X	-4.511	-4.511	0	%100
14	M9A	Z	0	0	0	%100
15	M10	X	-4.511	-4.511	0	%100
16	M10	Z	0	0	0	%100
17	M11	X	-1.042	-1.042	0	%100
18	M11	Z	0	0	0	%100
19	M12	X	-1.042	-1.042	0	%100
20	M12	Z	0	0	0	%100
21	M15	X	-.979	-.979	0	%100
22	M15	Z	0	0	0	%100
23	M17A	X	-.979	-.979	0	%100
24	M17A	Z	0	0	0	%100
25	OVP	X	0	0	0	%100
26	OVP	Z	0	0	0	%100
27	MP1A	X	-3.197	-3.197	0	%100
28	MP1A	Z	0	0	0	%100
29	MP6A	X	-3.197	-3.197	0	%100
30	MP6A	Z	0	0	0	%100
31	MP2A	X	-3.197	-3.197	0	%100
32	MP2A	Z	0	0	0	%100
33	MP3A	X	-3.544	-3.544	0	%100
34	MP3A	Z	0	0	0	%100
35	MP4A	X	-3.197	-3.197	0	%100
36	MP4A	Z	0	0	0	%100
37	MP5A	X	-3.197	-3.197	0	%100
38	MP5A	Z	0	0	0	%100
39	MP1C	X	-3.197	-3.197	0	%100
40	MP1C	Z	0	0	0	%100
41	MP6C	X	-3.197	-3.197	0	%100



**Member Distributed Loads (BLC 62 : Structure Wi (270 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
42	MP6C	Z	0	0	0	%100
43	MP2C	X	-3.197	-3.197	0	%100
44	MP2C	Z	0	0	0	%100
45	MP3C	X	-3.544	-3.544	0	%100
46	MP3C	Z	0	0	0	%100
47	MP4C	X	-3.197	-3.197	0	%100
48	MP4C	Z	0	0	0	%100
49	MP5C	X	-3.197	-3.197	0	%100
50	MP5C	Z	0	0	0	%100
51	MP1B	X	-3.197	-3.197	0	%100
52	MP1B	Z	0	0	0	%100
53	MP6B	X	-2.795	-2.795	0	%100
54	MP6B	Z	0	0	0	%100
55	MP2B	X	-3.197	-3.197	0	%100
56	MP2B	Z	0	0	0	%100
57	MP3B	X	-3.544	-3.544	0	%100
58	MP3B	Z	0	0	0	%100
59	MP4B	X	-3.197	-3.197	0	%100
60	MP4B	Z	0	0	0	%100
61	MP5B	X	-3.197	-3.197	0	%100
62	MP5B	Z	0	0	0	%100
63	M80A	X	-2.658	-2.658	0	%100
64	M80A	Z	0	0	0	%100
65	M81A	X	-2.658	-2.658	0	%100
66	M81A	Z	0	0	0	%100
67	M88	X	-2.726	-2.726	0	%100
68	M88	Z	0	0	0	%100
69	M95A	X	-2.726	-2.726	0	%100
70	M95A	Z	0	0	0	%100
71	M102	X	0	0	0	%100
72	M102	Z	0	0	0	%100
73	M91	X	-4.727	-4.727	0	%100
74	M91	Z	0	0	0	%100
75	M92	X	-3.14	-3.14	0	%100
76	M92	Z	0	0	0	%100
77	M93	X	-3.14	-3.14	0	%100
78	M93	Z	0	0	0	%100
79	M94A	X	-3.303	-3.303	0	%100
80	M94A	Z	0	0	0	%100
81	M95B	X	-3.303	-3.303	0	%100
82	M95B	Z	0	0	0	%100
83	M96A	X	0	0	0	%100
84	M96A	Z	0	0	0	%100

**Member Distributed Loads (BLC 63 : Structure Wi (300 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
1	M1	X	-2.708	-2.708	0	%100
2	M1	Z	-1.563	-1.563	0	%100
3	M2	X	-.283	-.283	0	%100
4	M2	Z	-.163	-.163	0	%100
5	FACE	X	-1.586	-1.586	0	%100
6	FACE	Z	-.916	-.916	0	%100
7	M17	X	-1.409	-1.409	0	%100
8	M17	Z	-.813	-.813	0	%100
9	M8	X	-1.586	-1.586	0	%100
10	M8	Z	-.916	-.916	0	%100
11	M9	X	-6.343	-6.343	0	%100
12	M9	Z	-3.662	-3.662	0	%100



**Member Distributed Loads (BLC 63 : Structure Wi (300 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
13	M9A	X	-2.93	-2.93	0 %100
14	M9A	Z	-1.691	-1.691	0 %100
15	M10	X	-2.93	-2.93	0 %100
16	M10	Z	-1.691	-1.691	0 %100
17	M11	X	-2.708	-2.708	0 %100
18	M11	Z	-1.563	-1.563	0 %100
19	M12	X	0	0	0 %100
20	M12	Z	0	0	0 %100
21	M15	X	-.283	-.283	0 %100
22	M15	Z	-.163	-.163	0 %100
23	M17A	X	-1.131	-1.131	0 %100
24	M17A	Z	-.653	-.653	0 %100
25	OVP	X	-.767	-.767	0 %100
26	OVP	Z	-.443	-.443	0 %100
27	MP1A	X	-2.769	-2.769	0 %100
28	MP1A	Z	-1.599	-1.599	0 %100
29	MP6A	X	-2.769	-2.769	0 %100
30	MP6A	Z	-1.599	-1.599	0 %100
31	MP2A	X	-2.769	-2.769	0 %100
32	MP2A	Z	-1.599	-1.599	0 %100
33	MP3A	X	-3.069	-3.069	0 %100
34	MP3A	Z	-1.772	-1.772	0 %100
35	MP4A	X	-2.769	-2.769	0 %100
36	MP4A	Z	-1.599	-1.599	0 %100
37	MP5A	X	-2.769	-2.769	0 %100
38	MP5A	Z	-1.599	-1.599	0 %100
39	MP1C	X	-2.769	-2.769	0 %100
40	MP1C	Z	-1.599	-1.599	0 %100
41	MP6C	X	-2.769	-2.769	0 %100
42	MP6C	Z	-1.599	-1.599	0 %100
43	MP2C	X	-2.769	-2.769	0 %100
44	MP2C	Z	-1.599	-1.599	0 %100
45	MP3C	X	-3.069	-3.069	0 %100
46	MP3C	Z	-1.772	-1.772	0 %100
47	MP4C	X	-2.769	-2.769	0 %100
48	MP4C	Z	-1.599	-1.599	0 %100
49	MP5C	X	-2.769	-2.769	0 %100
50	MP5C	Z	-1.599	-1.599	0 %100
51	MP1B	X	-2.769	-2.769	0 %100
52	MP1B	Z	-1.599	-1.599	0 %100
53	MP6B	X	-2.42	-2.42	0 %100
54	MP6B	Z	-1.397	-1.397	0 %100
55	MP2B	X	-2.769	-2.769	0 %100
56	MP2B	Z	-1.599	-1.599	0 %100
57	MP3B	X	-3.069	-3.069	0 %100
58	MP3B	Z	-1.772	-1.772	0 %100
59	MP4B	X	-2.769	-2.769	0 %100
60	MP4B	Z	-1.599	-1.599	0 %100
61	MP5B	X	-2.769	-2.769	0 %100
62	MP5B	Z	-1.599	-1.599	0 %100
63	M80A	X	-.767	-.767	0 %100
64	M80A	Z	-.443	-.443	0 %100
65	M81A	X	-3.069	-3.069	0 %100
66	M81A	Z	-1.772	-1.772	0 %100
67	M88	X	-.787	-.787	0 %100
68	M88	Z	-.454	-.454	0 %100
69	M95A	X	-3.148	-3.148	0 %100
70	M95A	Z	-1.817	-1.817	0 %100
71	M102	X	-.787	-.787	0 %100

**Member Distributed Loads (BLC 63 : Structure Wi (300 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
72	M102	Z	-454	-454	0	%100
73	M91	X	-3.636	-3.636	0	%100
74	M91	Z	-2.099	-2.099	0	%100
75	M92	X	-3.636	-3.636	0	%100
76	M92	Z	-2.099	-2.099	0	%100
77	M93	X	-2.261	-2.261	0	%100
78	M93	Z	-1.305	-1.305	0	%100
79	M94A	X	-954	-954	0	%100
80	M94A	Z	-551	-551	0	%100
81	M95B	X	-3.814	-3.814	0	%100
82	M95B	Z	-2.202	-2.202	0	%100
83	M96A	X	-954	-954	0	%100
84	M96A	Z	-551	-551	0	%100

**Member Distributed Loads (BLC 64 : Structure Wi (330 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
1	M1	X	-521	-521	0	%100
2	M1	Z	-903	-903	0	%100
3	M2	X	-49	-49	0	%100
4	M2	Z	-848	-848	0	%100
5	FACE	X	-2.747	-2.747	0	%100
6	FACE	Z	-4.757	-4.757	0	%100
7	M17	X	-2.44	-2.44	0	%100
8	M17	Z	-4.227	-4.227	0	%100
9	M8	X	0	0	0	%100
10	M8	Z	0	0	0	%100
11	M9	X	-2.747	-2.747	0	%100
12	M9	Z	-4.757	-4.757	0	%100
13	M9A	X	-564	-564	0	%100
14	M9A	Z	-977	-977	0	%100
15	M10	X	-564	-564	0	%100
16	M10	Z	-977	-977	0	%100
17	M11	X	-2.085	-2.085	0	%100
18	M11	Z	-3.61	-3.61	0	%100
19	M12	X	-521	-521	0	%100
20	M12	Z	-903	-903	0	%100
21	M15	X	0	0	0	%100
22	M15	Z	0	0	0	%100
23	M17A	X	-49	-49	0	%100
24	M17A	Z	-848	-848	0	%100
25	OVP	X	-1.329	-1.329	0	%100
26	OVP	Z	-2.302	-2.302	0	%100
27	MP1A	X	-1.599	-1.599	0	%100
28	MP1A	Z	-2.769	-2.769	0	%100
29	MP6A	X	-1.599	-1.599	0	%100
30	MP6A	Z	-2.769	-2.769	0	%100
31	MP2A	X	-1.599	-1.599	0	%100
32	MP2A	Z	-2.769	-2.769	0	%100
33	MP3A	X	-1.772	-1.772	0	%100
34	MP3A	Z	-3.069	-3.069	0	%100
35	MP4A	X	-1.599	-1.599	0	%100
36	MP4A	Z	-2.769	-2.769	0	%100
37	MP5A	X	-1.599	-1.599	0	%100
38	MP5A	Z	-2.769	-2.769	0	%100
39	MP1C	X	-1.599	-1.599	0	%100
40	MP1C	Z	-2.769	-2.769	0	%100
41	MP6C	X	-1.599	-1.599	0	%100
42	MP6C	Z	-2.769	-2.769	0	%100

**Member Distributed Loads (BLC 64 : Structure Wi (330 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft,...	End Magnitude[lb/ft,...	Start Location[ft, %]	End Location[ft, %]
43	MP2C	X	-1.599	-1.599	0 %100
44	MP2C	Z	-2.769	-2.769	0 %100
45	MP3C	X	-1.772	-1.772	0 %100
46	MP3C	Z	-3.069	-3.069	0 %100
47	MP4C	X	-1.599	-1.599	0 %100
48	MP4C	Z	-2.769	-2.769	0 %100
49	MP5C	X	-1.599	-1.599	0 %100
50	MP5C	Z	-2.769	-2.769	0 %100
51	MP1B	X	-1.599	-1.599	0 %100
52	MP1B	Z	-2.769	-2.769	0 %100
53	MP6B	X	-1.397	-1.397	0 %100
54	MP6B	Z	-2.42	-2.42	0 %100
55	MP2B	X	-1.599	-1.599	0 %100
56	MP2B	Z	-2.769	-2.769	0 %100
57	MP3B	X	-1.772	-1.772	0 %100
58	MP3B	Z	-3.069	-3.069	0 %100
59	MP4B	X	-1.599	-1.599	0 %100
60	MP4B	Z	-2.769	-2.769	0 %100
61	MP5B	X	-1.599	-1.599	0 %100
62	MP5B	Z	-2.769	-2.769	0 %100
63	M80A	X	0	0	0 %100
64	M80A	Z	0	0	0 %100
65	M81A	X	-1.329	-1.329	0 %100
66	M81A	Z	-2.302	-2.302	0 %100
67	M88	X	0	0	0 %100
68	M88	Z	0	0	0 %100
69	M95A	X	-1.363	-1.363	0 %100
70	M95A	Z	-2.361	-2.361	0 %100
71	M102	X	-1.363	-1.363	0 %100
72	M102	Z	-2.361	-2.361	0 %100
73	M91	X	-1.57	-1.57	0 %100
74	M91	Z	-2.719	-2.719	0 %100
75	M92	X	-2.364	-2.364	0 %100
76	M92	Z	-4.094	-4.094	0 %100
77	M93	X	-1.57	-1.57	0 %100
78	M93	Z	-2.719	-2.719	0 %100
79	M94A	X	0	0	0 %100
80	M94A	Z	0	0	0 %100
81	M95B	X	-1.652	-1.652	0 %100
82	M95B	Z	-2.861	-2.861	0 %100
83	M96A	X	-1.652	-1.652	0 %100
84	M96A	Z	-2.861	-2.861	0 %100

**Member Distributed Loads (BLC 65 : Structure Wm (0 Deg))**

Member Label	Direction	Start Magnitude[lb/ft,...	End Magnitude[lb/ft,...	Start Location[ft, %]	End Location[ft, %]
1	M1	X	0	0	0 %100
2	M1	Z	0	0	0 %100
3	M2	X	0	0	0 %100
4	M2	Z	-.125	-.125	0 %100
5	FACE	X	0	0	0 %100
6	FACE	Z	-2.078	-2.078	0 %100
7	M17	X	0	0	0 %100
8	M17	Z	-1.784	-1.784	0 %100
9	M8	X	0	0	0 %100
10	M8	Z	-.519	-.519	0 %100
11	M9	X	0	0	0 %100
12	M9	Z	-.519	-.519	0 %100
13	M9A	X	0	0	0 %100

**Member Distributed Loads (BLC 65 : Structure Wm (0 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
14	M9A	Z	0	0	%100
15	M10	X	0	0	%100
16	M10	Z	0	0	%100
17	M11	X	0	0	%100
18	M11	Z	-.707	-.707	%100
19	M12	X	0	0	%100
20	M12	Z	-.707	-.707	%100
21	M15	X	0	0	%100
22	M15	Z	-.031	-.031	%100
23	M17A	X	0	0	%100
24	M17A	Z	-.031	-.031	%100
25	OVP	X	0	0	%100
26	OVP	Z	-.717	-.717	%100
27	MP1A	X	0	0	%100
28	MP1A	Z	-.592	-.592	%100
29	MP6A	X	0	0	%100
30	MP6A	Z	-.592	-.592	%100
31	MP2A	X	0	0	%100
32	MP2A	Z	-.592	-.592	%100
33	MP3A	X	0	0	%100
34	MP3A	Z	-.717	-.717	%100
35	MP4A	X	0	0	%100
36	MP4A	Z	-.592	-.592	%100
37	MP5A	X	0	0	%100
38	MP5A	Z	-.592	-.592	%100
39	MP1C	X	0	0	%100
40	MP1C	Z	-.592	-.592	%100
41	MP6C	X	0	0	%100
42	MP6C	Z	-.592	-.592	%100
43	MP2C	X	0	0	%100
44	MP2C	Z	-.592	-.592	%100
45	MP3C	X	0	0	%100
46	MP3C	Z	-.717	-.717	%100
47	MP4C	X	0	0	%100
48	MP4C	Z	-.592	-.592	%100
49	MP5C	X	0	0	%100
50	MP5C	Z	-.592	-.592	%100
51	MP1B	X	0	0	%100
52	MP1B	Z	-.592	-.592	%100
53	MP6B	X	0	0	%100
54	MP6B	Z	-.512	-.512	%100
55	MP2B	X	0	0	%100
56	MP2B	Z	-.592	-.592	%100
57	MP3B	X	0	0	%100
58	MP3B	Z	-.717	-.717	%100
59	MP4B	X	0	0	%100
60	MP4B	Z	-.592	-.592	%100
61	MP5B	X	0	0	%100
62	MP5B	Z	-.592	-.592	%100
63	M80A	X	0	0	%100
64	M80A	Z	-.179	-.179	%100
65	M81A	X	0	0	%100
66	M81A	Z	-.179	-.179	%100
67	M88	X	0	0	%100
68	M88	Z	-.224	-.224	%100
69	M95A	X	0	0	%100
70	M95A	Z	-.224	-.224	%100
71	M102	X	0	0	%100
72	M102	Z	-.896	-.896	%100

**Member Distributed Loads (BLC 65 : Structure Wm (0 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
73	M91	X	0	0	0	%100
74	M91	Z	-0.739	-0.739	0	%100
75	M92	X	0	0	0	%100
76	M92	Z	-1.042	-1.042	0	%100
77	M93	X	0	0	0	%100
78	M93	Z	-1.042	-1.042	0	%100
79	M94A	X	0	0	0	%100
80	M94A	Z	-0.266	-0.266	0	%100
81	M95B	X	0	0	0	%100
82	M95B	Z	-0.266	-0.266	0	%100
83	M96A	X	0	0	0	%100
84	M96A	Z	-1.062	-1.062	0	%100

**Member Distributed Loads (BLC 66 : Structure Wm (30 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	.118	.118	0	%100
2	M1	Z	-.204	-.204	0	%100
3	M2	X	.047	.047	0	%100
4	M2	Z	-.081	-.081	0	%100
5	FACE	X	.779	.779	0	%100
6	FACE	Z	-1.35	-1.35	0	%100
7	M17	X	.669	.669	0	%100
8	M17	Z	-1.159	-1.159	0	%100
9	M8	X	.779	.779	0	%100
10	M8	Z	-1.35	-1.35	0	%100
11	M9	X	0	0	0	%100
12	M9	Z	0	0	0	%100
13	M9A	X	.133	.133	0	%100
14	M9A	Z	-.231	-.231	0	%100
15	M10	X	.133	.133	0	%100
16	M10	Z	-.231	-.231	0	%100
17	M11	X	.118	.118	0	%100
18	M11	Z	-.204	-.204	0	%100
19	M12	X	.471	.471	0	%100
20	M12	Z	-.816	-.816	0	%100
21	M15	X	.047	.047	0	%100
22	M15	Z	-.081	-.081	0	%100
23	M17A	X	0	0	0	%100
24	M17A	Z	0	0	0	%100
25	OVP	X	.269	.269	0	%100
26	OVP	Z	-.466	-.466	0	%100
27	MP1A	X	.296	.296	0	%100
28	MP1A	Z	-.513	-.513	0	%100
29	MP6A	X	.296	.296	0	%100
30	MP6A	Z	-.513	-.513	0	%100
31	MP2A	X	.296	.296	0	%100
32	MP2A	Z	-.513	-.513	0	%100
33	MP3A	X	.358	.358	0	%100
34	MP3A	Z	-.621	-.621	0	%100
35	MP4A	X	.296	.296	0	%100
36	MP4A	Z	-.513	-.513	0	%100
37	MP5A	X	.296	.296	0	%100
38	MP5A	Z	-.513	-.513	0	%100
39	MP1C	X	.296	.296	0	%100
40	MP1C	Z	-.513	-.513	0	%100
41	MP6C	X	.296	.296	0	%100
42	MP6C	Z	-.513	-.513	0	%100
43	MP2C	X	.296	.296	0	%100



**Member Distributed Loads (BLC 66 : Structure Wm (30 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
44	MP2C	Z	-.513	-.513	0	%100
45	MP3C	X	.358	.358	0	%100
46	MP3C	Z	-.621	-.621	0	%100
47	MP4C	X	.296	.296	0	%100
48	MP4C	Z	-.513	-.513	0	%100
49	MP5C	X	.296	.296	0	%100
50	MP5C	Z	-.513	-.513	0	%100
51	MP1B	X	.296	.296	0	%100
52	MP1B	Z	-.513	-.513	0	%100
53	MP6B	X	.256	.256	0	%100
54	MP6B	Z	-.443	-.443	0	%100
55	MP2B	X	.296	.296	0	%100
56	MP2B	Z	-.513	-.513	0	%100
57	MP3B	X	.358	.358	0	%100
58	MP3B	Z	-.621	-.621	0	%100
59	MP4B	X	.296	.296	0	%100
60	MP4B	Z	-.513	-.513	0	%100
61	MP5B	X	.296	.296	0	%100
62	MP5B	Z	-.513	-.513	0	%100
63	M80A	X	.269	.269	0	%100
64	M80A	Z	-.466	-.466	0	%100
65	M81A	X	0	0	0	%100
66	M81A	Z	0	0	0	%100
67	M88	X	.336	.336	0	%100
68	M88	Z	-.582	-.582	0	%100
69	M95A	X	0	0	0	%100
70	M95A	Z	0	0	0	%100
71	M102	X	.336	.336	0	%100
72	M102	Z	-.582	-.582	0	%100
73	M91	X	.42	.42	0	%100
74	M91	Z	-.727	-.727	0	%100
75	M92	X	.42	.42	0	%100
76	M92	Z	-.727	-.727	0	%100
77	M93	X	.571	.571	0	%100
78	M93	Z	-.99	-.99	0	%100
79	M94A	X	.398	.398	0	%100
80	M94A	Z	-.69	-.69	0	%100
81	M95B	X	0	0	0	%100
82	M95B	Z	0	0	0	%100
83	M96A	X	.398	.398	0	%100
84	M96A	Z	-.69	-.69	0	%100

**Member Distributed Loads (BLC 67 : Structure Wm (60 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	.612	.612	0	%100
2	M1	Z	-.353	-.353	0	%100
3	M2	X	.027	.027	0	%100
4	M2	Z	-.016	-.016	0	%100
5	FACE	X	.45	.45	0	%100
6	FACE	Z	-.26	-.26	0	%100
7	M17	X	.386	.386	0	%100
8	M17	Z	-.223	-.223	0	%100
9	M8	X	1.8	1.8	0	%100
10	M8	Z	-1.039	-1.039	0	%100
11	M9	X	.45	.45	0	%100
12	M9	Z	-.26	-.26	0	%100
13	M9A	X	.692	.692	0	%100
14	M9A	Z	-.399	-.399	0	%100



**Member Distributed Loads (BLC 67 : Structure Wm (60 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
15	M10	X	.692	.692	0 %100
16	M10	Z	-.399	-.399	0 %100
17	M11	X	0	0	0 %100
18	M11	Z	0	0	0 %100
19	M12	X	.612	.612	0 %100
20	M12	Z	-.353	-.353	0 %100
21	M15	X	.108	.108	0 %100
22	M15	Z	-.062	-.062	0 %100
23	M17A	X	.027	.027	0 %100
24	M17A	Z	-.016	-.016	0 %100
25	OVP	X	.155	.155	0 %100
26	OVP	Z	-.09	-.09	0 %100
27	MP1A	X	.513	.513	0 %100
28	MP1A	Z	-.296	-.296	0 %100
29	MP6A	X	.513	.513	0 %100
30	MP6A	Z	-.296	-.296	0 %100
31	MP2A	X	.513	.513	0 %100
32	MP2A	Z	-.296	-.296	0 %100
33	MP3A	X	.621	.621	0 %100
34	MP3A	Z	-.358	-.358	0 %100
35	MP4A	X	.513	.513	0 %100
36	MP4A	Z	-.296	-.296	0 %100
37	MP5A	X	.513	.513	0 %100
38	MP5A	Z	-.296	-.296	0 %100
39	MP1C	X	.513	.513	0 %100
40	MP1C	Z	-.296	-.296	0 %100
41	MP6C	X	.513	.513	0 %100
42	MP6C	Z	-.296	-.296	0 %100
43	MP2C	X	.513	.513	0 %100
44	MP2C	Z	-.296	-.296	0 %100
45	MP3C	X	.621	.621	0 %100
46	MP3C	Z	-.358	-.358	0 %100
47	MP4C	X	.513	.513	0 %100
48	MP4C	Z	-.296	-.296	0 %100
49	MP5C	X	.513	.513	0 %100
50	MP5C	Z	-.296	-.296	0 %100
51	MP1B	X	.513	.513	0 %100
52	MP1B	Z	-.296	-.296	0 %100
53	MP6B	X	.443	.443	0 %100
54	MP6B	Z	-.256	-.256	0 %100
55	MP2B	X	.513	.513	0 %100
56	MP2B	Z	-.296	-.296	0 %100
57	MP3B	X	.621	.621	0 %100
58	MP3B	Z	-.358	-.358	0 %100
59	MP4B	X	.513	.513	0 %100
60	MP4B	Z	-.296	-.296	0 %100
61	MP5B	X	.513	.513	0 %100
62	MP5B	Z	-.296	-.296	0 %100
63	M80A	X	.621	.621	0 %100
64	M80A	Z	-.358	-.358	0 %100
65	M81A	X	.155	.155	0 %100
66	M81A	Z	-.09	-.09	0 %100
67	M88	X	.776	.776	0 %100
68	M88	Z	-.448	-.448	0 %100
69	M95A	X	.194	.194	0 %100
70	M95A	Z	-.112	-.112	0 %100
71	M102	X	.194	.194	0 %100
72	M102	Z	-.112	-.112	0 %100
73	M91	X	.902	.902	0 %100

**Member Distributed Loads (BLC 67 : Structure Wm (60 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
74	M91	Z	-.521	-.521	0	%100
75	M92	X	.64	.64	0	%100
76	M92	Z	-.369	-.369	0	%100
77	M93	X	.902	.902	0	%100
78	M93	Z	-.521	-.521	0	%100
79	M94A	X	.92	.92	0	%100
80	M94A	Z	-.531	-.531	0	%100
81	M95B	X	.23	.23	0	%100
82	M95B	Z	-.133	-.133	0	%100
83	M96A	X	.23	.23	0	%100
84	M96A	Z	-.133	-.133	0	%100

**Member Distributed Loads (BLC 68 : Structure Wm (90 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
1	M1	X	.942	.942	0	%100
2	M1	Z	0	0	0	%100
3	M2	X	0	0	0	%100
4	M2	Z	0	0	0	%100
5	FACE	X	0	0	0	%100
6	FACE	Z	0	0	0	%100
7	M17	X	0	0	0	%100
8	M17	Z	0	0	0	%100
9	M8	X	1.558	1.558	0	%100
10	M8	Z	0	0	0	%100
11	M9	X	1.558	1.558	0	%100
12	M9	Z	0	0	0	%100
13	M9A	X	1.065	1.065	0	%100
14	M9A	Z	0	0	0	%100
15	M10	X	1.065	1.065	0	%100
16	M10	Z	0	0	0	%100
17	M11	X	.236	.236	0	%100
18	M11	Z	0	0	0	%100
19	M12	X	.236	.236	0	%100
20	M12	Z	0	0	0	%100
21	M15	X	.094	.094	0	%100
22	M15	Z	0	0	0	%100
23	M17A	X	.094	.094	0	%100
24	M17A	Z	0	0	0	%100
25	OVP	X	0	0	0	%100
26	OVP	Z	0	0	0	%100
27	MP1A	X	.592	.592	0	%100
28	MP1A	Z	0	0	0	%100
29	MP6A	X	.592	.592	0	%100
30	MP6A	Z	0	0	0	%100
31	MP2A	X	.592	.592	0	%100
32	MP2A	Z	0	0	0	%100
33	MP3A	X	.717	.717	0	%100
34	MP3A	Z	0	0	0	%100
35	MP4A	X	.592	.592	0	%100
36	MP4A	Z	0	0	0	%100
37	MP5A	X	.592	.592	0	%100
38	MP5A	Z	0	0	0	%100
39	MP1C	X	.592	.592	0	%100
40	MP1C	Z	0	0	0	%100
41	MP6C	X	.592	.592	0	%100
42	MP6C	Z	0	0	0	%100
43	MP2C	X	.592	.592	0	%100
44	MP2C	Z	0	0	0	%100

**Member Distributed Loads (BLC 68 : Structure Wm (90 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft,...	End Magnitude[lb/ft,...	Start Location[ft, %]	End Location[ft, %]
45	MP3C	X	.717	.717	0	%100
46	MP3C	Z	0	0	0	%100
47	MP4C	X	.592	.592	0	%100
48	MP4C	Z	0	0	0	%100
49	MP5C	X	.592	.592	0	%100
50	MP5C	Z	0	0	0	%100
51	MP1B	X	.592	.592	0	%100
52	MP1B	Z	0	0	0	%100
53	MP6B	X	.512	.512	0	%100
54	MP6B	Z	0	0	0	%100
55	MP2B	X	.592	.592	0	%100
56	MP2B	Z	0	0	0	%100
57	MP3B	X	.717	.717	0	%100
58	MP3B	Z	0	0	0	%100
59	MP4B	X	.592	.592	0	%100
60	MP4B	Z	0	0	0	%100
61	MP5B	X	.592	.592	0	%100
62	MP5B	Z	0	0	0	%100
63	M80A	X	.538	.538	0	%100
64	M80A	Z	0	0	0	%100
65	M81A	X	.538	.538	0	%100
66	M81A	Z	0	0	0	%100
67	M88	X	.672	.672	0	%100
68	M88	Z	0	0	0	%100
69	M95A	X	.672	.672	0	%100
70	M95A	Z	0	0	0	%100
71	M102	X	0	0	0	%100
72	M102	Z	0	0	0	%100
73	M91	X	1.143	1.143	0	%100
74	M91	Z	0	0	0	%100
75	M92	X	.84	.84	0	%100
76	M92	Z	0	0	0	%100
77	M93	X	.84	.84	0	%100
78	M93	Z	0	0	0	%100
79	M94A	X	.797	.797	0	%100
80	M94A	Z	0	0	0	%100
81	M95B	X	.797	.797	0	%100
82	M95B	Z	0	0	0	%100
83	M96A	X	0	0	0	%100
84	M96A	Z	0	0	0	%100

**Member Distributed Loads (BLC 69 : Structure Wm (120 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft,...	End Magnitude[lb/ft,...	Start Location[ft, %]	End Location[ft, %]
1	M1	X	.612	.612	0	%100
2	M1	Z	.353	.353	0	%100
3	M2	X	.027	.027	0	%100
4	M2	Z	.016	.016	0	%100
5	FACE	X	.45	.45	0	%100
6	FACE	Z	.26	.26	0	%100
7	M17	X	.386	.386	0	%100
8	M17	Z	.223	.223	0	%100
9	M8	X	.45	.45	0	%100
10	M8	Z	.26	.26	0	%100
11	M9	X	1.8	1.8	0	%100
12	M9	Z	1.039	1.039	0	%100
13	M9A	X	.692	.692	0	%100
14	M9A	Z	.399	.399	0	%100
15	M10	X	.692	.692	0	%100



**Member Distributed Loads (BLC 69 : Structure Wm (120 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
16	M10	Z	.399	.399	0 %100
17	M11	X	.612	.612	0 %100
18	M11	Z	.353	.353	0 %100
19	M12	X	0	0	0 %100
20	M12	Z	0	0	0 %100
21	M15	X	.027	.027	0 %100
22	M15	Z	.016	.016	0 %100
23	M17A	X	.108	.108	0 %100
24	M17A	Z	.062	.062	0 %100
25	OVP	X	.155	.155	0 %100
26	OVP	Z	.09	.09	0 %100
27	MP1A	X	.513	.513	0 %100
28	MP1A	Z	.296	.296	0 %100
29	MP6A	X	.513	.513	0 %100
30	MP6A	Z	.296	.296	0 %100
31	MP2A	X	.513	.513	0 %100
32	MP2A	Z	.296	.296	0 %100
33	MP3A	X	.621	.621	0 %100
34	MP3A	Z	.358	.358	0 %100
35	MP4A	X	.513	.513	0 %100
36	MP4A	Z	.296	.296	0 %100
37	MP5A	X	.513	.513	0 %100
38	MP5A	Z	.296	.296	0 %100
39	MP1C	X	.513	.513	0 %100
40	MP1C	Z	.296	.296	0 %100
41	MP6C	X	.513	.513	0 %100
42	MP6C	Z	.296	.296	0 %100
43	MP2C	X	.513	.513	0 %100
44	MP2C	Z	.296	.296	0 %100
45	MP3C	X	.621	.621	0 %100
46	MP3C	Z	.358	.358	0 %100
47	MP4C	X	.513	.513	0 %100
48	MP4C	Z	.296	.296	0 %100
49	MP5C	X	.513	.513	0 %100
50	MP5C	Z	.296	.296	0 %100
51	MP1B	X	.513	.513	0 %100
52	MP1B	Z	.296	.296	0 %100
53	MP6B	X	.443	.443	0 %100
54	MP6B	Z	.256	.256	0 %100
55	MP2B	X	.513	.513	0 %100
56	MP2B	Z	.296	.296	0 %100
57	MP3B	X	.621	.621	0 %100
58	MP3B	Z	.358	.358	0 %100
59	MP4B	X	.513	.513	0 %100
60	MP4B	Z	.296	.296	0 %100
61	MP5B	X	.513	.513	0 %100
62	MP5B	Z	.296	.296	0 %100
63	M80A	X	.155	.155	0 %100
64	M80A	Z	.09	.09	0 %100
65	M81A	X	.621	.621	0 %100
66	M81A	Z	.358	.358	0 %100
67	M88	X	.194	.194	0 %100
68	M88	Z	.112	.112	0 %100
69	M95A	X	.776	.776	0 %100
70	M95A	Z	.448	.448	0 %100
71	M102	X	.194	.194	0 %100
72	M102	Z	.112	.112	0 %100
73	M91	X	.902	.902	0 %100
74	M91	Z	.521	.521	0 %100

**Member Distributed Loads (BLC 69 : Structure Wm (120 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft,...	End Magnitude[lb/ft,...	Start Location[ft, %]	End Location[ft, %]
75	M92	X	.902	.902	0	%100
76	M92	Z	.521	.521	0	%100
77	M93	X	.64	.64	0	%100
78	M93	Z	.369	.369	0	%100
79	M94A	X	.23	.23	0	%100
80	M94A	Z	.133	.133	0	%100
81	M95B	X	.92	.92	0	%100
82	M95B	Z	.531	.531	0	%100
83	M96A	X	.23	.23	0	%100
84	M96A	Z	.133	.133	0	%100

**Member Distributed Loads (BLC 70 : Structure Wm (150 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft,...	End Magnitude[lb/ft,...	Start Location[ft, %]	End Location[ft, %]
1	M1	X	.118	.118	0	%100
2	M1	Z	.204	.204	0	%100
3	M2	X	.047	.047	0	%100
4	M2	Z	.081	.081	0	%100
5	FACE	X	.779	.779	0	%100
6	FACE	Z	1.35	1.35	0	%100
7	M17	X	.669	.669	0	%100
8	M17	Z	1.159	1.159	0	%100
9	M8	X	0	0	0	%100
10	M8	Z	0	0	0	%100
11	M9	X	.779	.779	0	%100
12	M9	Z	1.35	1.35	0	%100
13	M9A	X	.133	.133	0	%100
14	M9A	Z	.231	.231	0	%100
15	M10	X	.133	.133	0	%100
16	M10	Z	.231	.231	0	%100
17	M11	X	.471	.471	0	%100
18	M11	Z	.816	.816	0	%100
19	M12	X	.118	.118	0	%100
20	M12	Z	.204	.204	0	%100
21	M15	X	0	0	0	%100
22	M15	Z	0	0	0	%100
23	M17A	X	.047	.047	0	%100
24	M17A	Z	.081	.081	0	%100
25	OVP	X	.269	.269	0	%100
26	OVP	Z	.466	.466	0	%100
27	MP1A	X	.296	.296	0	%100
28	MP1A	Z	.513	.513	0	%100
29	MP6A	X	.296	.296	0	%100
30	MP6A	Z	.513	.513	0	%100
31	MP2A	X	.296	.296	0	%100
32	MP2A	Z	.513	.513	0	%100
33	MP3A	X	.358	.358	0	%100
34	MP3A	Z	.621	.621	0	%100
35	MP4A	X	.296	.296	0	%100
36	MP4A	Z	.513	.513	0	%100
37	MP5A	X	.296	.296	0	%100
38	MP5A	Z	.513	.513	0	%100
39	MP1C	X	.296	.296	0	%100
40	MP1C	Z	.513	.513	0	%100
41	MP6C	X	.296	.296	0	%100
42	MP6C	Z	.513	.513	0	%100
43	MP2C	X	.296	.296	0	%100
44	MP2C	Z	.513	.513	0	%100
45	MP3C	X	.358	.358	0	%100





**Member Distributed Loads (BLC 70 : Structure Wm (150 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
46	MP3C	Z	.621	.621	0	%100
47	MP4C	X	.296	.296	0	%100
48	MP4C	Z	.513	.513	0	%100
49	MP5C	X	.296	.296	0	%100
50	MP5C	Z	.513	.513	0	%100
51	MP1B	X	.296	.296	0	%100
52	MP1B	Z	.513	.513	0	%100
53	MP6B	X	.256	.256	0	%100
54	MP6B	Z	.443	.443	0	%100
55	MP2B	X	.296	.296	0	%100
56	MP2B	Z	.513	.513	0	%100
57	MP3B	X	.358	.358	0	%100
58	MP3B	Z	.621	.621	0	%100
59	MP4B	X	.296	.296	0	%100
60	MP4B	Z	.513	.513	0	%100
61	MP5B	X	.296	.296	0	%100
62	MP5B	Z	.513	.513	0	%100
63	M80A	X	0	0	0	%100
64	M80A	Z	0	0	0	%100
65	M81A	X	.269	.269	0	%100
66	M81A	Z	.466	.466	0	%100
67	M88	X	0	0	0	%100
68	M88	Z	0	0	0	%100
69	M95A	X	.336	.336	0	%100
70	M95A	Z	.582	.582	0	%100
71	M102	X	.336	.336	0	%100
72	M102	Z	.582	.582	0	%100
73	M91	X	.42	.42	0	%100
74	M91	Z	.727	.727	0	%100
75	M92	X	.571	.571	0	%100
76	M92	Z	.99	.99	0	%100
77	M93	X	.42	.42	0	%100
78	M93	Z	.727	.727	0	%100
79	M94A	X	0	0	0	%100
80	M94A	Z	0	0	0	%100
81	M95B	X	.398	.398	0	%100
82	M95B	Z	.69	.69	0	%100
83	M96A	X	.398	.398	0	%100
84	M96A	Z	.69	.69	0	%100

**Member Distributed Loads (BLC 71 : Structure Wm (180 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	0	0	0	%100
2	M1	Z	0	0	0	%100
3	M2	X	0	0	0	%100
4	M2	Z	.125	.125	0	%100
5	FACE	X	0	0	0	%100
6	FACE	Z	2.078	2.078	0	%100
7	M17	X	0	0	0	%100
8	M17	Z	1.784	1.784	0	%100
9	M8	X	0	0	0	%100
10	M8	Z	.519	.519	0	%100
11	M9	X	0	0	0	%100
12	M9	Z	.519	.519	0	%100
13	M9A	X	0	0	0	%100
14	M9A	Z	0	0	0	%100
15	M10	X	0	0	0	%100
16	M10	Z	0	0	0	%100



**Member Distributed Loads (BLC 71 : Structure Wm (180 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
17	M11	X	0	0	%100
18	M11	Z	.707	.707	%100
19	M12	X	0	0	%100
20	M12	Z	.707	.707	%100
21	M15	X	0	0	%100
22	M15	Z	.031	.031	%100
23	M17A	X	0	0	%100
24	M17A	Z	.031	.031	%100
25	OVP	X	0	0	%100
26	OVP	Z	.717	.717	%100
27	MP1A	X	0	0	%100
28	MP1A	Z	.592	.592	%100
29	MP6A	X	0	0	%100
30	MP6A	Z	.592	.592	%100
31	MP2A	X	0	0	%100
32	MP2A	Z	.592	.592	%100
33	MP3A	X	0	0	%100
34	MP3A	Z	.717	.717	%100
35	MP4A	X	0	0	%100
36	MP4A	Z	.592	.592	%100
37	MP5A	X	0	0	%100
38	MP5A	Z	.592	.592	%100
39	MP1C	X	0	0	%100
40	MP1C	Z	.592	.592	%100
41	MP6C	X	0	0	%100
42	MP6C	Z	.592	.592	%100
43	MP2C	X	0	0	%100
44	MP2C	Z	.592	.592	%100
45	MP3C	X	0	0	%100
46	MP3C	Z	.717	.717	%100
47	MP4C	X	0	0	%100
48	MP4C	Z	.592	.592	%100
49	MP5C	X	0	0	%100
50	MP5C	Z	.592	.592	%100
51	MP1B	X	0	0	%100
52	MP1B	Z	.592	.592	%100
53	MP6B	X	0	0	%100
54	MP6B	Z	.512	.512	%100
55	MP2B	X	0	0	%100
56	MP2B	Z	.592	.592	%100
57	MP3B	X	0	0	%100
58	MP3B	Z	.717	.717	%100
59	MP4B	X	0	0	%100
60	MP4B	Z	.592	.592	%100
61	MP5B	X	0	0	%100
62	MP5B	Z	.592	.592	%100
63	M80A	X	0	0	%100
64	M80A	Z	.179	.179	%100
65	M81A	X	0	0	%100
66	M81A	Z	.179	.179	%100
67	M88	X	0	0	%100
68	M88	Z	.224	.224	%100
69	M95A	X	0	0	%100
70	M95A	Z	.224	.224	%100
71	M102	X	0	0	%100
72	M102	Z	.896	.896	%100
73	M91	X	0	0	%100
74	M91	Z	.739	.739	%100
75	M92	X	0	0	%100

**Member Distributed Loads (BLC 71 : Structure Wm (180 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
76	M92	Z	1.042	1.042	0	%100
77	M93	X	0	0	0	%100
78	M93	Z	1.042	1.042	0	%100
79	M94A	X	0	0	0	%100
80	M94A	Z	.266	.266	0	%100
81	M95B	X	0	0	0	%100
82	M95B	Z	.266	.266	0	%100
83	M96A	X	0	0	0	%100
84	M96A	Z	1.062	1.062	0	%100

**Member Distributed Loads (BLC 72 : Structure Wm (210 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
1	M1	X	-.118	-.118	0	%100
2	M1	Z	.204	.204	0	%100
3	M2	X	-.047	-.047	0	%100
4	M2	Z	.081	.081	0	%100
5	FACE	X	-.779	-.779	0	%100
6	FACE	Z	1.35	1.35	0	%100
7	M17	X	-.669	-.669	0	%100
8	M17	Z	1.159	1.159	0	%100
9	M8	X	-.779	-.779	0	%100
10	M8	Z	1.35	1.35	0	%100
11	M9	X	0	0	0	%100
12	M9	Z	0	0	0	%100
13	M9A	X	-.133	-.133	0	%100
14	M9A	Z	.231	.231	0	%100
15	M10	X	-.133	-.133	0	%100
16	M10	Z	.231	.231	0	%100
17	M11	X	-.118	-.118	0	%100
18	M11	Z	.204	.204	0	%100
19	M12	X	-.471	-.471	0	%100
20	M12	Z	.816	.816	0	%100
21	M15	X	-.047	-.047	0	%100
22	M15	Z	.081	.081	0	%100
23	M17A	X	0	0	0	%100
24	M17A	Z	0	0	0	%100
25	OVP	X	-.269	-.269	0	%100
26	OVP	Z	.466	.466	0	%100
27	MP1A	X	-.296	-.296	0	%100
28	MP1A	Z	.513	.513	0	%100
29	MP6A	X	-.296	-.296	0	%100
30	MP6A	Z	.513	.513	0	%100
31	MP2A	X	-.296	-.296	0	%100
32	MP2A	Z	.513	.513	0	%100
33	MP3A	X	-.358	-.358	0	%100
34	MP3A	Z	.621	.621	0	%100
35	MP4A	X	-.296	-.296	0	%100
36	MP4A	Z	.513	.513	0	%100
37	MP5A	X	-.296	-.296	0	%100
38	MP5A	Z	.513	.513	0	%100
39	MP1C	X	-.296	-.296	0	%100
40	MP1C	Z	.513	.513	0	%100
41	MP6C	X	-.296	-.296	0	%100
42	MP6C	Z	.513	.513	0	%100
43	MP2C	X	-.296	-.296	0	%100
44	MP2C	Z	.513	.513	0	%100
45	MP3C	X	-.358	-.358	0	%100
46	MP3C	Z	.621	.621	0	%100

**Member Distributed Loads (BLC 72 : Structure Wm (210 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft, %]	End Location[ft, %]
47	MP4C	X	-.296	-.296	0	%100
48	MP4C	Z	.513	.513	0	%100
49	MP5C	X	-.296	-.296	0	%100
50	MP5C	Z	.513	.513	0	%100
51	MP1B	X	-.296	-.296	0	%100
52	MP1B	Z	.513	.513	0	%100
53	MP6B	X	-.256	-.256	0	%100
54	MP6B	Z	.443	.443	0	%100
55	MP2B	X	-.296	-.296	0	%100
56	MP2B	Z	.513	.513	0	%100
57	MP3B	X	-.358	-.358	0	%100
58	MP3B	Z	.621	.621	0	%100
59	MP4B	X	-.296	-.296	0	%100
60	MP4B	Z	.513	.513	0	%100
61	MP5B	X	-.296	-.296	0	%100
62	MP5B	Z	.513	.513	0	%100
63	M80A	X	-.269	-.269	0	%100
64	M80A	Z	.466	.466	0	%100
65	M81A	X	0	0	0	%100
66	M81A	Z	0	0	0	%100
67	M88	X	-.336	-.336	0	%100
68	M88	Z	.582	.582	0	%100
69	M95A	X	0	0	0	%100
70	M95A	Z	0	0	0	%100
71	M102	X	-.336	-.336	0	%100
72	M102	Z	.582	.582	0	%100
73	M91	X	-.42	-.42	0	%100
74	M91	Z	.727	.727	0	%100
75	M92	X	-.42	-.42	0	%100
76	M92	Z	.727	.727	0	%100
77	M93	X	-.571	-.571	0	%100
78	M93	Z	.99	.99	0	%100
79	M94A	X	-.398	-.398	0	%100
80	M94A	Z	.69	.69	0	%100
81	M95B	X	0	0	0	%100
82	M95B	Z	0	0	0	%100
83	M96A	X	-.398	-.398	0	%100
84	M96A	Z	.69	.69	0	%100

**Member Distributed Loads (BLC 73 : Structure Wm (240 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft, %]	End Location[ft, %]
1	M1	X	-.612	-.612	0	%100
2	M1	Z	.353	.353	0	%100
3	M2	X	-.027	-.027	0	%100
4	M2	Z	.016	.016	0	%100
5	FACE	X	-.45	-.45	0	%100
6	FACE	Z	.26	.26	0	%100
7	M17	X	-.386	-.386	0	%100
8	M17	Z	.223	.223	0	%100
9	M8	X	-1.8	-1.8	0	%100
10	M8	Z	1.039	1.039	0	%100
11	M9	X	-.45	-.45	0	%100
12	M9	Z	.26	.26	0	%100
13	M9A	X	-.692	-.692	0	%100
14	M9A	Z	.399	.399	0	%100
15	M10	X	-.692	-.692	0	%100
16	M10	Z	.399	.399	0	%100
17	M11	X	0	0	0	%100

**Member Distributed Loads (BLC 73 : Structure Wm (240 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
18	M11	Z	0	0	%100
19	M12	X	-.612	-.612	0
20	M12	Z	.353	.353	0
21	M15	X	-.108	-.108	0
22	M15	Z	.062	.062	0
23	M17A	X	-.027	-.027	0
24	M17A	Z	.016	.016	0
25	OVP	X	-.155	-.155	0
26	OVP	Z	.09	.09	0
27	MP1A	X	-.513	-.513	0
28	MP1A	Z	.296	.296	0
29	MP6A	X	-.513	-.513	0
30	MP6A	Z	.296	.296	0
31	MP2A	X	-.513	-.513	0
32	MP2A	Z	.296	.296	0
33	MP3A	X	-.621	-.621	0
34	MP3A	Z	.358	.358	0
35	MP4A	X	-.513	-.513	0
36	MP4A	Z	.296	.296	0
37	MP5A	X	-.513	-.513	0
38	MP5A	Z	.296	.296	0
39	MP1C	X	-.513	-.513	0
40	MP1C	Z	.296	.296	0
41	MP6C	X	-.513	-.513	0
42	MP6C	Z	.296	.296	0
43	MP2C	X	-.513	-.513	0
44	MP2C	Z	.296	.296	0
45	MP3C	X	-.621	-.621	0
46	MP3C	Z	.358	.358	0
47	MP4C	X	-.513	-.513	0
48	MP4C	Z	.296	.296	0
49	MP5C	X	-.513	-.513	0
50	MP5C	Z	.296	.296	0
51	MP1B	X	-.513	-.513	0
52	MP1B	Z	.296	.296	0
53	MP6B	X	-.443	-.443	0
54	MP6B	Z	.256	.256	0
55	MP2B	X	-.513	-.513	0
56	MP2B	Z	.296	.296	0
57	MP3B	X	-.621	-.621	0
58	MP3B	Z	.358	.358	0
59	MP4B	X	-.513	-.513	0
60	MP4B	Z	.296	.296	0
61	MP5B	X	-.513	-.513	0
62	MP5B	Z	.296	.296	0
63	M80A	X	-.621	-.621	0
64	M80A	Z	.358	.358	0
65	M81A	X	-.155	-.155	0
66	M81A	Z	.09	.09	0
67	M88	X	-.776	-.776	0
68	M88	Z	.448	.448	0
69	M95A	X	-.194	-.194	0
70	M95A	Z	.112	.112	0
71	M102	X	-.194	-.194	0
72	M102	Z	.112	.112	0
73	M91	X	-.902	-.902	0
74	M91	Z	.521	.521	0
75	M92	X	-.64	-.64	0
76	M92	Z	.369	.369	0

**Member Distributed Loads (BLC 73 : Structure Wm (240 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
77	M93	X	-.902	-.902	0	%100
78	M93	Z	.521	.521	0	%100
79	M94A	X	-.92	-.92	0	%100
80	M94A	Z	.531	.531	0	%100
81	M95B	X	-.23	-.23	0	%100
82	M95B	Z	.133	.133	0	%100
83	M96A	X	-.23	-.23	0	%100
84	M96A	Z	.133	.133	0	%100

**Member Distributed Loads (BLC 74 : Structure Wm (270 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M1	X	-.942	-.942	0	%100
2	M1	Z	0	0	0	%100
3	M2	X	0	0	0	%100
4	M2	Z	0	0	0	%100
5	FACE	X	0	0	0	%100
6	FACE	Z	0	0	0	%100
7	M17	X	0	0	0	%100
8	M17	Z	0	0	0	%100
9	M8	X	-1.558	-1.558	0	%100
10	M8	Z	0	0	0	%100
11	M9	X	-1.558	-1.558	0	%100
12	M9	Z	0	0	0	%100
13	M9A	X	-1.065	-1.065	0	%100
14	M9A	Z	0	0	0	%100
15	M10	X	-1.065	-1.065	0	%100
16	M10	Z	0	0	0	%100
17	M11	X	-.236	-.236	0	%100
18	M11	Z	0	0	0	%100
19	M12	X	-.236	-.236	0	%100
20	M12	Z	0	0	0	%100
21	M15	X	-.094	-.094	0	%100
22	M15	Z	0	0	0	%100
23	M17A	X	-.094	-.094	0	%100
24	M17A	Z	0	0	0	%100
25	OVP	X	0	0	0	%100
26	OVP	Z	0	0	0	%100
27	MP1A	X	-.592	-.592	0	%100
28	MP1A	Z	0	0	0	%100
29	MP6A	X	-.592	-.592	0	%100
30	MP6A	Z	0	0	0	%100
31	MP2A	X	-.592	-.592	0	%100
32	MP2A	Z	0	0	0	%100
33	MP3A	X	-.717	-.717	0	%100
34	MP3A	Z	0	0	0	%100
35	MP4A	X	-.592	-.592	0	%100
36	MP4A	Z	0	0	0	%100
37	MP5A	X	-.592	-.592	0	%100
38	MP5A	Z	0	0	0	%100
39	MP1C	X	-.592	-.592	0	%100
40	MP1C	Z	0	0	0	%100
41	MP6C	X	-.592	-.592	0	%100
42	MP6C	Z	0	0	0	%100
43	MP2C	X	-.592	-.592	0	%100
44	MP2C	Z	0	0	0	%100
45	MP3C	X	-.717	-.717	0	%100
46	MP3C	Z	0	0	0	%100
47	MP4C	X	-.592	-.592	0	%100



**Member Distributed Loads (BLC 74 : Structure Wm (270 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft,...]	End Magnitude[lb/ft,...]	Start Location[ft,%]	End Location[ft,%]
48	MP4C	Z	0	0	%100
49	MP5C	X	-592	-592	%100
50	MP5C	Z	0	0	%100
51	MP1B	X	-592	-592	%100
52	MP1B	Z	0	0	%100
53	MP6B	X	-512	-512	%100
54	MP6B	Z	0	0	%100
55	MP2B	X	-592	-592	%100
56	MP2B	Z	0	0	%100
57	MP3B	X	-717	-717	%100
58	MP3B	Z	0	0	%100
59	MP4B	X	-592	-592	%100
60	MP4B	Z	0	0	%100
61	MP5B	X	-592	-592	%100
62	MP5B	Z	0	0	%100
63	M80A	X	-538	-538	%100
64	M80A	Z	0	0	%100
65	M81A	X	-538	-538	%100
66	M81A	Z	0	0	%100
67	M88	X	-672	-672	%100
68	M88	Z	0	0	%100
69	M95A	X	-672	-672	%100
70	M95A	Z	0	0	%100
71	M102	X	0	0	%100
72	M102	Z	0	0	%100
73	M91	X	-1.143	-1.143	%100
74	M91	Z	0	0	%100
75	M92	X	-84	-84	%100
76	M92	Z	0	0	%100
77	M93	X	-84	-84	%100
78	M93	Z	0	0	%100
79	M94A	X	-797	-797	%100
80	M94A	Z	0	0	%100
81	M95B	X	-797	-797	%100
82	M95B	Z	0	0	%100
83	M96A	X	0	0	%100
84	M96A	Z	0	0	%100

**Member Distributed Loads (BLC 75 : Structure Wm (300 Deg))**

Member Label	Direction	Start Magnitude[lb/ft,...]	End Magnitude[lb/ft,...]	Start Location[ft,%]	End Location[ft,%]
1	M1	X	-612	-612	%100
2	M1	Z	-353	-353	%100
3	M2	X	-.027	-.027	%100
4	M2	Z	-.016	-.016	%100
5	FACE	X	-.45	-.45	%100
6	FACE	Z	-.26	-.26	%100
7	M17	X	-.386	-.386	%100
8	M17	Z	-.223	-.223	%100
9	M8	X	-.45	-.45	%100
10	M8	Z	-.26	-.26	%100
11	M9	X	-1.8	-1.8	%100
12	M9	Z	-1.039	-1.039	%100
13	M9A	X	-.692	-.692	%100
14	M9A	Z	-.399	-.399	%100
15	M10	X	-.692	-.692	%100
16	M10	Z	-.399	-.399	%100
17	M11	X	-.612	-.612	%100
18	M11	Z	-.353	-.353	%100

**Member Distributed Loads (BLC 75 : Structure Wm (300 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
19	M12	X	0	0	%100
20	M12	Z	0	0	%100
21	M15	X	-.027	-.027	0
22	M15	Z	-.016	-.016	0
23	M17A	X	-.108	-.108	0
24	M17A	Z	-.062	-.062	0
25	OVP	X	-.155	-.155	0
26	OVP	Z	-.09	-.09	0
27	MP1A	X	-.513	-.513	0
28	MP1A	Z	-.296	-.296	0
29	MP6A	X	-.513	-.513	0
30	MP6A	Z	-.296	-.296	0
31	MP2A	X	-.513	-.513	0
32	MP2A	Z	-.296	-.296	0
33	MP3A	X	-.621	-.621	0
34	MP3A	Z	-.358	-.358	0
35	MP4A	X	-.513	-.513	0
36	MP4A	Z	-.296	-.296	0
37	MP5A	X	-.513	-.513	0
38	MP5A	Z	-.296	-.296	0
39	MP1C	X	-.513	-.513	0
40	MP1C	Z	-.296	-.296	0
41	MP6C	X	-.513	-.513	0
42	MP6C	Z	-.296	-.296	0
43	MP2C	X	-.513	-.513	0
44	MP2C	Z	-.296	-.296	0
45	MP3C	X	-.621	-.621	0
46	MP3C	Z	-.358	-.358	0
47	MP4C	X	-.513	-.513	0
48	MP4C	Z	-.296	-.296	0
49	MP5C	X	-.513	-.513	0
50	MP5C	Z	-.296	-.296	0
51	MP1B	X	-.513	-.513	0
52	MP1B	Z	-.296	-.296	0
53	MP6B	X	-.443	-.443	0
54	MP6B	Z	-.256	-.256	0
55	MP2B	X	-.513	-.513	0
56	MP2B	Z	-.296	-.296	0
57	MP3B	X	-.621	-.621	0
58	MP3B	Z	-.358	-.358	0
59	MP4B	X	-.513	-.513	0
60	MP4B	Z	-.296	-.296	0
61	MP5B	X	-.513	-.513	0
62	MP5B	Z	-.296	-.296	0
63	M80A	X	-.155	-.155	0
64	M80A	Z	-.09	-.09	0
65	M81A	X	-.621	-.621	0
66	M81A	Z	-.358	-.358	0
67	M88	X	-.194	-.194	0
68	M88	Z	-.112	-.112	0
69	M95A	X	-.776	-.776	0
70	M95A	Z	-.448	-.448	0
71	M102	X	-.194	-.194	0
72	M102	Z	-.112	-.112	0
73	M91	X	-.902	-.902	0
74	M91	Z	-.521	-.521	0
75	M92	X	-.902	-.902	0
76	M92	Z	-.521	-.521	0
77	M93	X	-.64	-.64	0

**Member Distributed Loads (BLC 75 : Structure Wm (300 Deg)) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
78	M93	Z	-.369	-.369	0	%100
79	M94A	X	-.23	-.23	0	%100
80	M94A	Z	-.133	-.133	0	%100
81	M95B	X	-.92	-.92	0	%100
82	M95B	Z	-.531	-.531	0	%100
83	M96A	X	-.23	-.23	0	%100
84	M96A	Z	-.133	-.133	0	%100

**Member Distributed Loads (BLC 76 : Structure Wm (330 Deg))**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
1	M1	X	-.118	-.118	0	%100
2	M1	Z	-.204	-.204	0	%100
3	M2	X	-.047	-.047	0	%100
4	M2	Z	-.081	-.081	0	%100
5	FACE	X	-.779	-.779	0	%100
6	FACE	Z	-1.35	-1.35	0	%100
7	M17	X	-.669	-.669	0	%100
8	M17	Z	-1.159	-1.159	0	%100
9	M8	X	0	0	0	%100
10	M8	Z	0	0	0	%100
11	M9	X	-.779	-.779	0	%100
12	M9	Z	-1.35	-1.35	0	%100
13	M9A	X	-.133	-.133	0	%100
14	M9A	Z	-.231	-.231	0	%100
15	M10	X	-.133	-.133	0	%100
16	M10	Z	-.231	-.231	0	%100
17	M11	X	-.471	-.471	0	%100
18	M11	Z	-.816	-.816	0	%100
19	M12	X	-.118	-.118	0	%100
20	M12	Z	-.204	-.204	0	%100
21	M15	X	0	0	0	%100
22	M15	Z	0	0	0	%100
23	M17A	X	-.047	-.047	0	%100
24	M17A	Z	-.081	-.081	0	%100
25	OVP	X	-.269	-.269	0	%100
26	OVP	Z	-.466	-.466	0	%100
27	MP1A	X	-.296	-.296	0	%100
28	MP1A	Z	-.513	-.513	0	%100
29	MP6A	X	-.296	-.296	0	%100
30	MP6A	Z	-.513	-.513	0	%100
31	MP2A	X	-.296	-.296	0	%100
32	MP2A	Z	-.513	-.513	0	%100
33	MP3A	X	-.358	-.358	0	%100
34	MP3A	Z	-.621	-.621	0	%100
35	MP4A	X	-.296	-.296	0	%100
36	MP4A	Z	-.513	-.513	0	%100
37	MP5A	X	-.296	-.296	0	%100
38	MP5A	Z	-.513	-.513	0	%100
39	MP1C	X	-.296	-.296	0	%100
40	MP1C	Z	-.513	-.513	0	%100
41	MP6C	X	-.296	-.296	0	%100
42	MP6C	Z	-.513	-.513	0	%100
43	MP2C	X	-.296	-.296	0	%100
44	MP2C	Z	-.513	-.513	0	%100
45	MP3C	X	-.358	-.358	0	%100
46	MP3C	Z	-.621	-.621	0	%100
47	MP4C	X	-.296	-.296	0	%100
48	MP4C	Z	-.513	-.513	0	%100

**Member Distributed Loads (BLC 76 : Structure Wm (330 Deg)) (Continued)**

Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft,%]	End Location[ft,%]
49	MP5C	X	-296	-296	0 %100
50	MP5C	Z	-513	-513	0 %100
51	MP1B	X	-296	-296	0 %100
52	MP1B	Z	-513	-513	0 %100
53	MP6B	X	-256	-256	0 %100
54	MP6B	Z	-443	-443	0 %100
55	MP2B	X	-296	-296	0 %100
56	MP2B	Z	-513	-513	0 %100
57	MP3B	X	-358	-358	0 %100
58	MP3B	Z	-621	-621	0 %100
59	MP4B	X	-296	-296	0 %100
60	MP4B	Z	-513	-513	0 %100
61	MP5B	X	-296	-296	0 %100
62	MP5B	Z	-513	-513	0 %100
63	M80A	X	0	0	0 %100
64	M80A	Z	0	0	0 %100
65	M81A	X	-269	-269	0 %100
66	M81A	Z	-466	-466	0 %100
67	M88	X	0	0	0 %100
68	M88	Z	0	0	0 %100
69	M95A	X	-336	-336	0 %100
70	M95A	Z	-582	-582	0 %100
71	M102	X	-336	-336	0 %100
72	M102	Z	-582	-582	0 %100
73	M91	X	-42	-42	0 %100
74	M91	Z	-727	-727	0 %100
75	M92	X	-571	-571	0 %100
76	M92	Z	-99	-99	0 %100
77	M93	X	-42	-42	0 %100
78	M93	Z	-727	-727	0 %100
79	M94A	X	0	0	0 %100
80	M94A	Z	0	0	0 %100
81	M95B	X	-398	-398	0 %100
82	M95B	Z	-69	-69	0 %100
83	M96A	X	-398	-398	0 %100
84	M96A	Z	-69	-69	0 %100

**Member Distributed Loads (BLC 87 : BLC 39 Transient Area Loads)**

Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft,%]	End Location[ft,%]
1	M8	Y	-801	-14.539	5.133 6.673
2	M8	Y	-14.539	-20.046	6.673 8.213
3	M8	Y	-20.046	-14.743	8.213 9.753
4	M8	Y	-14.743	-8.107	9.753 11.293
5	M8	Y	-8.107	-801	11.293 12.833
6	M9	Y	-559	-5.405	0 1.54
7	M9	Y	-5.405	-12.569	1.54 3.08
8	M9	Y	-12.569	-18.935	3.08 4.62
9	M9	Y	-18.935	-17.394	4.62 6.16
10	M9	Y	-17.394	-10.552	6.16 7.7
11	M9	Y	-4.009	-9.331	6.417 7.7
12	M9	Y	-9.331	-13.677	7.7 8.983
13	M9	Y	-13.677	-12.035	8.983 10.267
14	M9	Y	-14.654	-9.485	10.267 11.55
15	M9	Y	-9.485	-5.53	11.55 12.833
16	M10	Y	-147	-12.333	0 1.625
17	M10	Y	-12.333	-24.519	1.625 3.25
18	M10	Y	-8.425	-13.328	2.708 3.611
19	M10	Y	-13.328	-23.044	3.611 4.514



**Member Distributed Loads (BLC 87 : BLC 39 Transient Area Loads) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
20	M10	Y	-23.044	-37.573	4.514	5.417
21	M15	Y	-4.707	-17.228	0	.409
22	M15	Y	-17.228	-29.749	.409	.818
23	M9A	Y	-12.666	-12.666	0	2.979
24	M10	Y	-12.666	-12.666	2.438	5.417
25	M8	Y	-5.531	-9.486	0	1.283
26	M8	Y	-9.486	-14.652	1.283	2.567
27	M8	Y	-12.035	-13.675	2.567	3.85
28	M8	Y	-13.675	-9.329	3.85	5.133
29	M8	Y	-9.329	-4.012	5.133	6.417
30	M9A	Y	-24.52	-12.334	2.167	3.792
31	M9A	Y	-12.334	-.147	3.792	5.417
32	M9A	Y	-37.578	-23.043	0	.903
33	M9A	Y	-23.043	-13.326	.903	1.806
34	M9A	Y	-13.326	-8.429	1.806	2.708
35	M17A	Y	-29.756	-17.228	0	.409
36	M17A	Y	-17.228	-4.7	.409	.818

**Member Distributed Loads (BLC 88 : BLC 40 Transient Area Loads)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M8	Y	-1.157	-21	5.133	6.673
2	M8	Y	-21	-28.955	6.673	8.213
3	M8	Y	-28.955	-21.295	8.213	9.753
4	M8	Y	-21.295	-11.71	9.753	11.293
5	M8	Y	-11.71	-1.157	11.293	12.833
6	M9	Y	-.807	-7.807	0	1.54
7	M9	Y	-7.807	-18.156	1.54	3.08
8	M9	Y	-18.156	-27.351	3.08	4.62
9	M9	Y	-27.351	-25.125	4.62	6.16
10	M9	Y	-25.125	-15.242	6.16	7.7
11	M9	Y	-5.791	-13.477	6.417	7.7
12	M9	Y	-13.477	-19.756	7.7	8.983
13	M9	Y	-19.756	-17.384	8.983	10.267
14	M9	Y	-21.167	-13.701	10.267	11.55
15	M9	Y	-13.701	-7.988	11.55	12.833
16	M10	Y	-.212	-17.814	0	1.625
17	M10	Y	-17.814	-35.417	1.625	3.25
18	M10	Y	-12.169	-19.252	2.708	3.611
19	M10	Y	-19.252	-33.286	3.611	4.514
20	M10	Y	-33.286	-54.272	4.514	5.417
21	M15	Y	-6.799	-24.885	0	.409
22	M15	Y	-24.885	-42.97	.409	.818
23	M9A	Y	-18.295	-18.295	0	2.979
24	M10	Y	-18.295	-18.295	2.438	5.417
25	M8	Y	-7.989	-13.702	0	1.283
26	M8	Y	-13.702	-21.164	1.283	2.567
27	M8	Y	-17.384	-19.752	2.567	3.85
28	M8	Y	-19.752	-13.475	3.85	5.133
29	M8	Y	-13.475	-5.795	5.133	6.417
30	M9A	Y	-35.418	-17.815	2.167	3.792
31	M9A	Y	-17.815	-.213	3.792	5.417
32	M9A	Y	-54.279	-33.284	0	.903
33	M9A	Y	-33.284	-19.249	.903	1.806
34	M9A	Y	-19.249	-12.175	1.806	2.708
35	M17A	Y	-42.981	-24.885	0	.409
36	M17A	Y	-24.885	-6.789	.409	.818

**Member Distributed Loads (BLC 90 : BLC 85 Transient Area Loads)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M2	Z	-.21	-.21	.357	.722
2	M17	Z	-.038	-.218	0	2.064
3	M17	Z	-.218	-.215	2.064	4.128
4	M17	Z	-.215	-.03	4.128	6.192
5	M8	Z	-.004	-.075	5.133	6.673
6	M8	Z	-.075	-.215	6.673	8.213
7	M8	Z	-.215	-.259	8.213	9.753
8	M8	Z	-.259	-.14	9.753	11.293
9	M8	Z	-.14	-.004	11.293	12.833
10	M9	Z	-.014	-.115	0	1.283
11	M9	Z	-.115	-.2	1.283	2.567
12	M9	Z	-.2	-.271	2.567	3.85
13	M9	Z	-.271	-.211	3.85	5.133
14	M9	Z	-.211	-.014	5.133	6.417
15	M17	Z	-.138	-.138	.17	1.17
16	M9	Z	-.025	-.176	6.417	7.7
17	M9	Z	-.176	-.292	7.7	8.983
18	M9	Z	-.292	-.226	8.983	10.267
19	M9	Z	-.226	-.063	10.267	11.55
20	M9	Z	-.063	-.008	11.55	12.833
21	M10	Z	-.208	-.176	0	2.708
22	FACE	Z	-.015	-.119	0	1.283
23	FACE	Z	-.119	-.24	1.283	2.567
24	FACE	Z	-.24	-.159	2.567	3.85
25	FACE	Z	-.159	-.006	3.85	5.133
26	M9	Z	-.039	-.039	10.267	12.833
27	M10	Z	-.359	-.039	2.708	5.417
28	M15	Z	-.038	-.038	.076	.818
29	M9A	Z	-.22	-.22	0	2.979
30	M10	Z	-.22	-.22	2.438	5.417
31	M17	Z	-.138	-.138	5.71	6.71
32	M8	Z	-.008	-.063	0	1.283
33	M8	Z	-.063	-.226	1.283	2.567
34	M8	Z	-.226	-.292	2.567	3.85
35	M8	Z	-.292	-.176	3.85	5.133
36	M8	Z	-.176	-.025	5.133	6.417
37	M9A	Z	-.32	-.063	2.708	5.417
38	FACE	Z	-.006	-.159	7.7	8.983
39	FACE	Z	-.159	-.24	8.983	10.267
40	FACE	Z	-.24	-.119	10.267	11.55
41	FACE	Z	-.119	-.015	11.55	12.833
42	M8	Z	-.039	-.039	0	2.567
43	M9A	Z	-.359	-.039	0	2.708
44	M17A	Z	-.038	-.038	0	.742

**Member Distributed Loads (BLC 91 : BLC 86 Transient Area Loads)**

	Member Label	Direction	Start Magnitude[lb/ft....	End Magnitude[lb/ft....	Start Location[ft.%]	End Location[ft.%]
1	M2	X	.21	.21	.357	.722
2	M17	X	.038	.218	0	2.064
3	M17	X	.218	.215	2.064	4.128
4	M17	X	.215	.03	4.128	6.192
5	M8	X	.004	.075	5.133	6.673
6	M8	X	.075	.215	6.673	8.213
7	M8	X	.215	.259	8.213	9.753
8	M8	X	.259	.14	9.753	11.293
9	M8	X	.14	.004	11.293	12.833
10	M9	X	.014	.115	0	1.283
11	M9	X	.115	.2	1.283	2.567



**Member Distributed Loads (BLC 91 : BLC 86 Transient Area Loads) (Continued)**

	Member Label	Direction	Start Magnitude[lb/ft....]	End Magnitude[lb/ft....]	Start Location[ft.%]	End Location[ft.%]
12	M9	X	.2	.271	2.567	3.85
13	M9	X	.271	.211	3.85	5.133
14	M9	X	.211	.014	5.133	6.417
15	M17	X	.138	.138	.17	1.17
16	M9	X	.025	.176	6.417	7.7
17	M9	X	.176	.292	7.7	8.983
18	M9	X	.292	.226	8.983	10.267
19	M9	X	.226	.063	10.267	11.55
20	M9	X	.063	.008	11.55	12.833
21	M10	X	.208	.176	0	2.708
22	FACE	X	.015	.119	0	1.283
23	FACE	X	.119	.24	1.283	2.567
24	FACE	X	.24	.159	2.567	3.85
25	FACE	X	.159	.006	3.85	5.133
26	M9	X	.039	.039	10.267	12.833
27	M10	X	.359	.039	2.708	5.417
28	M15	X	.038	.038	.076	.818
29	M9A	X	.22	.22	0	2.979
30	M10	X	.22	.22	2.438	5.417
31	M17	X	.138	.138	5.71	6.71
32	M8	X	.008	.063	0	1.283
33	M8	X	.063	.226	1.283	2.567
34	M8	X	.226	.292	2.567	3.85
35	M8	X	.292	.176	3.85	5.133
36	M8	X	.176	.025	5.133	6.417
37	M9A	X	.32	.063	2.708	5.417
38	FACE	X	.006	.159	7.7	8.983
39	FACE	X	.159	.24	8.983	10.267
40	FACE	X	.24	.119	10.267	11.55
41	FACE	X	.119	.015	11.55	12.833
42	M8	X	.039	.039	0	2.567
43	M9A	X	.359	.039	0	2.708
44	M17A	X	.038	.038	0	.742

**Member Area Loads (BLC 39 : Structure D)**

	Joint A	Joint B	Joint C	Joint D	Direction	Distribution	Magnitude[ksf]
1	N29A	N28	N26	N27	Y	A-B	-.009
2	N29A	N30	N29B	N32	Y	A-B	-.009
3	N32	N29B	N20	N33	Y	C-D	-.009
4	N29B	N37	N21	N20	Y	A-B	-.009
5	N33A	N28	N37A	N37	Y	A-B	-.009
6	N37	N37A	N36A	N21	Y	C-D	-.009

**Member Area Loads (BLC 40 : Structure Di)**

	Joint A	Joint B	Joint C	Joint D	Direction	Distribution	Magnitude[ksf]
1	N29A	N28	N26	N27	Y	A-B	-.013
2	N29A	N30	N29B	N32	Y	A-B	-.013
3	N32	N29B	N20	N33	Y	C-D	-.013
4	N29B	N37	N21	N20	Y	A-B	-.013
5	N33A	N28	N37A	N37	Y	A-B	-.013
6	N37	N37A	N36A	N21	Y	C-D	-.013

**Member Area Loads (BLC 84 : Structure Ev)**

	Joint A	Joint B	Joint C	Joint D	Direction	Distribution	Magnitude[ksf]
1	N29A	N28	N26	N27	Y	Two Way	0
2	N29A	N30	N29B	N32	Y	Two Way	0

**Member Area Loads (BLC 84 : Structure Ev) (Continued)**

	Joint A	Joint B	Joint C	Joint D	Direction	Distribution	Magnitude[ksf]
3	N32	N29B	N20	N33	Y	Two Way	0
4	N29B	N37	N21	N20	Y	Two Way	0
5	N33A	N28	N37A	N37	Y	Two Way	0
6	N37	N37A	N36A	N21	Y	Two Way	0

**Member Area Loads (BLC 85 : Structure Eh (0 Deg))**

	Joint A	Joint B	Joint C	Joint D	Direction	Distribution	Magnitude[ksf]
1	N29A	N28	N26	N27	Z	Two Way	-.000156
2	N29A	N30	N29B	N32	Z	Two Way	-.000156
3	N32	N29B	N20	N33	Z	Two Way	-.000156
4	N29B	N37	N21	N20	Z	Two Way	-.000156
5	N33A	N28	N37A	N37	Z	Two Way	-.000156
6	N37	N37A	N36A	N21	Z	Two Way	-.000156

**Member Area Loads (BLC 86 : Structure Eh (90 Deg))**

	Joint A	Joint B	Joint C	Joint D	Direction	Distribution	Magnitude[ksf]
1	N29A	N28	N26	N27	X	Two Way	.000156
2	N29A	N30	N29B	N32	X	Two Way	.000156
3	N32	N29B	N20	N33	X	Two Way	.000156
4	N29B	N37	N21	N20	X	Two Way	.000156
5	N33A	N28	N37A	N37	X	Two Way	.000156
6	N37	N37A	N36A	N21	X	Two Way	.000156

**Envelope Joint Reactions**

	Joint		X [lb]	LC	Y [lb]	LC	Z [lb]	LC	MX [k-ft]	LC	MY [k-ft]	LC	MZ [k-ft]	LC
1	N2	max	1486.761	10	1319.013	19	7014.647	1	.816	7	.805	4	.628	5
2		min	-1475.479	4	-260.931	1	-6885.171	7	-1.042	1	-7.98	10	-.642	11
3	N22A	max	6178.666	9	944.595	3	3259.618	3	.246	9	1.237	12	1.045	9
4		min	-6058.1	3	-800.952	9	-3443.233	9	-.572	3	-1.626	6	-.604	3
5	N24A	max	6124.711	11	969.755	11	3224.813	11	.284	5	1.456	8	.582	11
6		min	-6168.715	5	-790.349	5	-3363.749	5	-.706	11	-1.043	2	-1.033	5
7	N171	max	44.285	10	3367.649	1	1632.621	7	0	75	0	12	0	6
8		min	-44.335	4	-1224.454	7	-4433.952	1	0	1	0	6	0	12
9	N174A	max	1424.577	3	3567.559	9	2349.488	9	0	6	0	12	0	12
10		min	-4071.488	9	-1233.879	3	-822.95	3	0	12	0	6	0	6
11	N177	max	3966.908	5	3476.654	5	2287.973	5	0	8	0	8	0	8
12		min	-1408.258	11	-1219.884	11	-813.915	11	0	2	0	2	0	2
13	Totals:	max	7380.375	10	8979.804	18	7305.755	1						
14		min	-7380.374	4	3026.261	75	-7305.758	7						

**Envelope AISC 15th(360-16): LRFD Steel Code Checks**

Member	Shape	Code C...	Loc[ft]	LC	Shear ...	Loc[ft]	Dir	LC	phi*Pnc [lb]	phi*Pnt [lb]	phi*Mn y-...	phi*Mn z-...	Cb	Eqn
1	M1	HSS4X4X4	.218	3.958	1	.085	0	z	10	117957.5...	139518	16.181	16.181	1.... H1-1b
2	M2	PL1/2X12_H...	.189	.409	1	.166	.409	y	13	222159.1...	283500	2.954	103.359	1.... H1-1b
3	FACE	C5X6.7	.430	12.165	5	.629	7.62	z	2	4477.095	63828	1.604	9.585	3.... H1-1a
4	M17	C5X6.7	.317	3.44	24	.068	4.873	y	2	15577.11	63828	1.604	9.585	1.... H1-1b
5	M8	C5X6.7	.440	12.165	1	.355	.802	y	8	4477.095	63828	1.604	9.585	2.... H1-1a
6	M9	C5X6.7	.437	.668	1	.345	.802	y	4	4477.095	63828	1.604	9.585	2.4 H1-1a
7	M9A	L4X3X4	.499	2.934	20	.037	2.934	z	24	31758.543	54756	1.844	4.813	1.... H2-1
8	M10	L4X3X4	.480	2.483	18	.036	2.483	z	14	31758.543	54756	1.844	4.814	1.... H2-1
9	M11	HSS4X4X4	.233	3.958	9	.062	4.024	y	9	117957.5...	139518	16.181	16.181	1.... H1-1b
10	M12	HSS4X4X4	.229	3.958	5	.066	0	z	8	117957.5...	139518	16.181	16.181	1.... H1-1b
11	M15	PL1/2X12_H...	.196	.409	9	.177	.409	y	20	222159.1...	283500	2.954	103.359	1.... H1-1b
12	M17A	PL1/2X12_H...	.199	.409	5	.172	0	y	17	222159.1...	283500	2.954	103.359	1.... H1-1b
13	OVP	PIPE 2.5	.372	4.036	4	.133	7.292		3	14558.792	50715	3.596	3.596	2.... H1-1b

**Envelope AISC 15th(360-16): LRFD Steel Code Checks (Continued)**


Member	Shape	Code C...	Locftl	LC	Shear ...	Locftl	Dir	LC	phi*Pnc [lb]	phi*Pnt [lb]	phi*Mn y...	phi*Mn z...	Cb	Eqn
14	MP1A	PIPE 2.0	.388	6.417	4	.111	6.417	3	17855.085	32130	1.872	1.872	1...	H1-1b
15	MP6A	PIPE 2.0	.397	6.417	10	.120	6.417	11	17855.085	32130	1.872	1.872	1...	H1-1b
16	MP2A	PIPE 2.0	.464	6.333	4	.133	5.917	3	14916.096	32130	1.872	1.872	1...	H1-1b
17	MP3A	PIPE 2.5	.448	6.333	4	.184	6.333	4	30038.461	50715	3.596	3.596	1...	H1-1b
18	MP4A	PIPE 2.0	.503	6.333	10	.130	6.333	9	14916.096	32130	1.872	1.872	1...	H1-1b
19	MP5A	PIPE 2.0	.437	6.333	10	.160	6.333	12	14916.096	32130	1.872	1.872	1...	H1-1b
20	MP1C	PIPE 2.0	.372	6.417	12	.113	6.417	11	17855.085	32130	1.872	1.872	2...	H1-1b
21	MP6C	PIPE 2.0	.367	6.417	6	.122	6.417	7	17855.085	32130	1.872	1.872	1...	H1-1b
22	MP2C	PIPE 2.0	.437	6.333	12	.104	5.917	11	14916.096	32130	1.872	1.872	1...	H1-1b
23	MP3C	PIPE 2.5	.398	6.333	12	.158	6.333	1	30038.461	50715	3.596	3.596	1...	H1-1b
24	MP4C	PIPE 2.0	.450	6.333	6	.119	6.333	4	14916.096	32130	1.872	1.872	1...	H1-1b
25	MP5C	PIPE 2.0	.397	6.333	6	.117	6.333	8	14916.096	32130	1.872	1.872	1...	H1-1b
26	MP1B	PIPE 2.0	.377	6.417	8	.121	6.417	7	17855.085	32130	1.872	1.872	1...	H1-1b
27	MP6B	PIPE 2.0	.382	6.417	2	.119	6.417	3	17855.085	32130	1.872	1.872	2...	H1-1b
28	MP2B	PIPE 2.0	.446	6.333	8	.105	5.917	7	14916.096	32130	1.872	1.872	1...	H1-1b
29	MP3B	PIPE 2.5	.418	6.333	8	.162	6.333	9	30038.461	50715	3.596	3.596	2...	H1-1b
30	MP4B	PIPE 2.0	.455	6.333	2	.122	6.333	12	14916.096	32130	1.872	1.872	1...	H1-1b
31	MP5B	PIPE 2.0	.413	6.333	2	.123	6.333	4	14916.096	32130	1.872	1.872	1...	H1-1b
32	M80A	PIPE 2.5	.381	4.036	12	.113	7.292	11	14558.792	50715	3.596	3.596	2...	H1-1b
33	M81A	PIPE 2.5	.383	4.036	8	.123	7.292	7	14558.792	50715	3.596	3.596	2...	H1-1b
34	M88	L3X3X4	.362	2.029	6	.042	0	z 6	42590.691	46656	1.688	3.756	2...	H2-1
35	M95A	L3X3X4	.348	0	7	.039	.042	z 2	42590.691	46656	1.688	3.756	2.2	H2-1
36	M102	L3X3X4	.304	0	3	.036	0	z 10	42590.691	46656	1.688	3.756	2...	H2-1
37	M91	LL3x3x3x6	.120	5	1	.003	5	z 10	46390.788	70632	6.362	3.751	1	H1-1b*
38	M92	LL3x3x3x6	.128	5	9	.004	0	z 12	46390.788	70632	6.362	3.751	1	H1-1b*
39	M93	LL3x3x3x6	.124	5	5	.004	0	z 2	46390.788	70632	6.362	3.751	1	H1-1b*
40	M94A	L3X3X4	.348	4.029	5	.020	.042	z 6	32566.236	46656	1.688	3.756	2...	H2-1
41	M95B	L3X3X4	.337	4.029	1	.019	0	z 8	32566.236	46656	1.688	3.756	2...	H2-1
42	M96A	L3X3X4	.359	4.029	9	.021	4.029	z 4	32566.236	46656	1.688	3.756	2...	H2-1



## I. Mount-to-Tower Connection Check

### RISA Model Data

Nodes (labeled per RISA)	Orientation (per graphic of typical platform)
N2	270
N22A	30
N24A	150

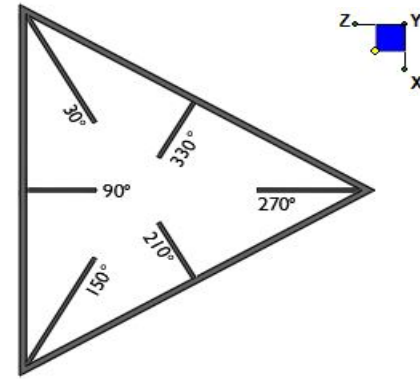

TYPICAL PLATFORM

### Tower Connection Bolt Checks

Any moment resistance?:

Bolt Quantity per Reaction:

$d_x$  (in) (Delta X of typ. bolt config. sketch):

$d_y$  (in) (Delta Y of typ. bolt config. sketch):

Bolt Type:

Bolt Diameter (in):

Required Tensile Strength (kips):

Required Shear Strength (kips):


Tensile Strength / bolt (kips):

Shear Strength / bolt (kips):

Tensile Capacity Overall:

Shear Capacity Overall:

yes
4
6
6
A325N
0.625
11.6
4.1
20.7
12.4
14.1%*
8.2%

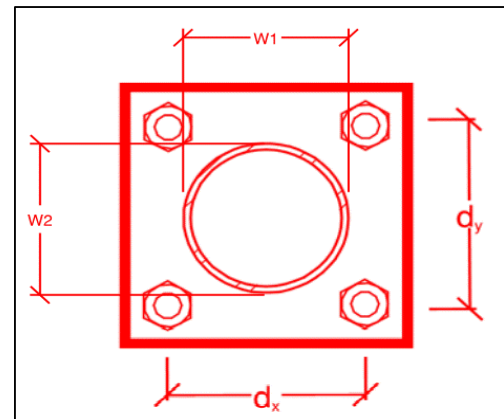

\*Note: Tension reduction not required if tension or shear capacity < 30%

### Tower Connection Plate and Weld Check

Connecting Standoff Member Shape:

Plate Width (in):

Plate Height (in):

W1 (in):

W2 (in):

Fy (ksi, plate):

$t_{plate}$  (in):

Weld Size (1/16 in):

$\Phi * R_n$  (kip/in):

Required Weld Strength (kip/in):

Plate Bending Capacity:

Weld Capacity:

Rect
8
8
4
4
36
0.75
3
4.18
1.11
18.6%
26.6%

### Max Plate Bending Strengths

$Mu_{xx}$ (kip-in):	3.5
$\Phi * Mn_{xx}$ (kip-in):	36.5
$Mu_{yy}$ (kip-in):	3.3
$\Phi * Mn_{yy}$ (kip-in):	36.5

# Maser Consulting Connecticut

Subject

TIA-222-H Adoption and Wind Speed Usage

Site Information

Site ID: 467373-VZW / MILFORD CT

Site Name: MILFORD CT

Carrier Name: Verizon Wireless

Address: 423 Oronoque Rd

Milford, Connecticut 06460

New Haven County

Latitude: 41.237875°

Longitude: -73.086219°

Structure Information

Tower Type: 108-Ft Monopole

Mount Type: 12.83-Ft Platform

To Whom It May Concern,

We respectfully submit the above referenced Antenna Mount Structural Analysis report in conformance with ANSI/TIA-222-H, Structural Standard for Antenna Supporting Structures and Antennas and Small Wind Turbine Support Structures.

The 2015 International Building Code states that, in Section 3108, telecommunication towers shall be designed and constructed in accordance with the provisions of TIA-222. The TIA-222-H is the latest revision of the TIA-222 Standard, effective as of January 01, 2018.

As with all ANSI standards and engineering best practice is to apply the most current revision of the standard. This ensures the engineer is applying all updates. As an example, the TIA-222-H standard includes updates to bring it in line with the latest AISC and ACI standards and it also incorporates the latest wind speed maps by ASCE 7 based on updated studies of the wind data.

The TIA-222-H standard clarifies these specific requirements for the antenna mount analysis such as modeling methods, seismic analysis, 30-degree increment wind directions and maintenance loading. Therefore, it is our opinion that TIA-222-H is the most appropriate standard for antenna mount structural analysis and is acceptable for use at this site to ensure the engineer is taking into account the most current engineering standard available.

Sincerely,



Eric Anderson, PE  
Technical Specialist

# Exhibit F

## **Power Density/RF Emissions Report**



Site Name: **MILFORD CT**  
 Cumulative Power Density

Operator	Operating Frequency	Number of Trans.	ERP Per Trans.	Total ERP	Distance to Target	Calculated Power Density	Maximum Permissible Exposure*	Fraction of MPE
	(MHz)		(watts)	(watts)	(feet)	(mW/cm <sup>2</sup> )	(mW/cm <sup>2</sup> )	(%)
VZW 700	751	4	623	2494	105	0.0081	0.5007	1.62%
VZW CDMA	878.49	2	367	735	105	0.0024	0.5857	0.41%
VZW Cellular	874	4	638	2552	105	0.0083	0.5827	1.43%
VZW PCS	1975	4	1462	5846	105	0.0191	1.0000	1.91%
VZW AWS	2120	4	1566	6264	105	0.0204	1.0000	2.04%
VZW CBAND	3730.08	4	6531	26125	105	0.0852	1.0000	8.52%
<b>Total Percentage of Maximum Permissible Exposure</b>								<b>15.93%</b>

\*Guidelines adopted by the FCC on August 1, 1996, 47 CFR Part 1 based on NCRP Report 86, 1986 and generally on ANSI/IEEE C95.1-1992

\*\*Calculation includes a -10 dB Off Beam Antenna Pattern Adjustment pursuant to Attachments B and C of the Siting Council's November 10, 2015 Memorandum for Exempt Modification filings

MHz = Megahertz  
 mW/cm<sup>2</sup> = milliwatts per square centimeter  
 ERP = Effective Radiated Power

Absolute worst case maximum values used.