



NSS **NORTHEAST**
SITE SOLUTIONS
Turnkey Wireless Development

Northeast Site Solutions
Denise Sabo
4 Angela's Way, Burlington CT 06013
203-435-3640
denise@northeastsitesolutions.com

June 25, 2021

Members of the Siting Council
Connecticut Siting Council
Ten Franklin Square
New Britain, CT 06051

RE: Exempt Modification Application
691 Oxford Road, Oxford CT 06478
Latitude: 41.447086
Longitude: -73.152308
Site#: 873645_Crown_VZW

Dear Ms. Bachman:

Verizon Wireless is requesting to file an exempt modification for an existing tower located at 691 Oxford Road, Oxford CT 06478. Verizon Wireless currently maintains fifteen (15) antennas at the 147-foot level of the existing 150-foot tower. The property is owned by Don and Dave Farm Realty LLC, and the tower is owned by Crown Castle. Verizon now intends to replace three (3) of the existing antenna. The new antennas would be installed at the 147-foot level of the tower. This modification includes B2, B5 hardware that is both 4G (LTE), and 5G capable.

Verizon Planned Modifications:

Remove: NONE

Remove and Replace:

- (3) Nokia AHCA Airscale RRH (REMOVE) – (3) Samsung B2/B66A -BRO49 – RFV01U-D1A RRU (REPLACE)
- (3) Nokia UHBA Airscale RRH (REMOVE) – (3) Samsung B5/B13 -BRO4C – RFV01U-D2A RRU (REPLACE)
- (3) Andrew JAHH 65B R3B Antenna (REMOVE) – (3) Sub6 MT6407-77A Antenna (REPLACE)

Install New:

- (3) Diplexers

Existing to Remain:

- (6) Andrew JAHH 65B R3B Antenna
- (3) LPA-80083/6CF Antenna
- (1) Raycap
- (6) 7/8" Coax Lines
- (1) 1-5/8" Hybrid



The facility was approved by the Town of Oxford Planning and Zoning Commission on July 5, 2001. Please see attached.

Please accept this letter as notification pursuant to Regulations of Connecticut State Agencies § 16- SOj-73, for construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-72(b)(2). In accordance with R.C.S.A. § 16-SOj-73, a copy of this letter is being sent to The Honorable George R. Temple, First Selectman for the Town of Oxford, Steven S. Macary, Zoning Enforcement Officer, Crown Castle as the tower owner, and Don and Dave Farm Realty LLC the property owner.

The planned modifications to the facility fall squarely within those activities explicitly provided for in R.C.S.A. § 16-50j-72(b)(2).

1. The proposed modifications will not result in an increase in the height of the existing structure.
2. The proposed modifications will not require the extension of the site boundary.
3. The proposed modifications will not increase noise levels at the facility by six decibels or more, or to levels that exceed state and local criteria.
4. The operation of the replacement antennas will not increase radio frequency emissions at the facility to a level at or above the Federal Communications Commission safety standard.
5. The proposed modifications will not cause a change or alteration in the physical or environmental characteristics of the site.
6. The existing structure and its foundation can support the proposed loading.

For the foregoing reasons, Verizon Wireless respectfully submits that the proposed modifications to the above referenced telecommunications facility constitute an exempt modification under R.C.S.A. § 16-50j-72(b)(2).

Sincerely,

Denise Sabo
Mobile: 203-435-3640
Fax: 413-521-0558
Office: 4 Angela's Way, Burlington CT 06013
Email: denise@northeastsitesolutions.com



NSS

NORTHEAST
SITE SOLUTIONS

Turnkey Wireless Development

Attachments

cc: The Honorable George R. Temple (via email only to firstselectman@oxford-ct.gov)

Town of Oxford Town Hall – Selectman’s Office

486 Oxford Road, Oxford CT 06478

Steven S. Macary, Zoning Enforcement Officer (via email only to zoningenforce@oxford-ct.gov)

Town of Oxford Town Hall – Planning and Zoning

486 Oxford Road, Oxford CT 06478

Don and Dave Farm Realty LLC, Property Owner

691 Oxford Road, Oxford CT 06478

Crown Castle, Tower Owner (via email to Sarah.Snell@crowncastle.com)

Exhibit A

Original Facility Approval

July 5, 2001
Regular Planning & Zoning Meeting

the fact that Don Smith designed this 7-lot subdivision for the Town and is now reviewing his own work. The remaining six lots will need to be reviewed. It was recommended that a letter be sent to the Inland Wetlands Commission and Selectmen regarding this matter.

MOTION was made by Edwin Hellauer and seconded by Ray Reynolds approve Z-01-053 Ziat, LLC, 315 Riggs Street (Industrial Site Plan) based on map dated 1/18/01 and last revised 5/18/01 and with the following conditions:

- 1) Applicant and their assigns must comply with all representations made at P&Z Commission meetings or at public hearings regrading this application.
- 2) Prior to installation, lighting should be submitted to the ZEO for approval.
- 3) Vehicle directional signs stating entrance and exit are to be clearly marked and with no advertisement.
- 4) Compliance with Fire Marshal's letter dated 5/14/01.
- 5) Compliance with Oxford Driveway Ordinance as of this date.
- 6) Compliance with Oxford Zoning Regulations as of this date.
- 7) No work to begin until security is set by P&Z Engineer in a form acceptable to P&Z Counsel.
- 8) No material will be substituted without approval from the P&Z Commission and P&Z Engineer.
- 9) Landscaping plan and architectural rendering must be as presented on site plan. Any variations must be approved by the P&Z Commission.
- 10) Per Article 3, Section 19.1 of the Zoning Regulations, the applicant shall be responsible for rendering payment to any outside experts the Commission assigns to review this application.
- 11) Approval is conditioned on Inland Wetlands approval.

Reason for approval is that with the Inland Wetlands permit, this application would meet the Oxford Zoning Regulations as of this date. Alternate Scott Mackler abstained. All were in favor.


- 4) Z-01-066 Lars Realty/Cocchiola Paving, Inc., Roosevelt Drive. Secretary Edwin Hellauer read a letter dated 7/3/01 from Attorney Robert Uskevich in which he requests that this application be tabled until the 7/19/01 regular meeting. A letter will be sent suggesting that the applicant request an extension because after submittal of outstanding documents, this Commission will need time to have the documents reviewed by staff.

MOTION was made by Dave Robinson and seconded by Ray Reynolds to table Z-01-066 Lars Realty/Cocchiola Paving, Inc., Roosevelt Drive until the 7/19/01 regular meeting per the written request dated 7/3/01. Alternate John Barnes abstained. All were in favor.

- 5) Z-01-099 Integrated Wireless Services/Rich, 691 Oxford Road (S/E - Wireless Communications Facility). Chairman Robinson explained that the applicant was before the Commission earlier this evening during the public hearing. Contracted P&Z Planner Brian Miller has reviewed this application. An application was previously taken out for antennas on the existing silo at the same location. Alternate John Barnes recused himself at this point.

MOTION was made by Vincent Vizzo and seconded by Ray Reynolds to grant the waiver to the Zoning Regulations for the size of the six (6) equipment shelters for Z-01-099 Integrated Wireless Services/Rich, 691 Oxford Road. The equipment shelter for the applicant's equipment shelter will be 240 square feet in size and 10 feet in height. The maximum square footage for the remaining five (5) equipment shelters is hereby waived but is not to exceed 240 square feet and 10 feet in height. All were in favor.

MOTION was made by Dave Robinson and seconded by Edwin Hellauer to approve Z-01-099 Integrated Wireless Services/Rich, 691 Oxford Road (S/E - Wireless Telecommunications Facility) with the waiver for size of the six (6) equipment shelters based on Sheets T-1 dated 12/12/00 and last revised 5/16/01 and Sheets C-1 thru C-9 dated 12/12/00 and last revised 5/16/01 and conditioned upon compliance with Brian Miller's letter dated 6/12/01. Any representations made by the applicant or their assigns during the public hearing are to be made part of this approval.



STATE OF CONNECTICUT

CONNECTICUT SITING COUNCIL

1 CENTRAL PARK PLAZA • NEW BRITAIN, CONN. 06051

PHONE: 827-2604

Petition No. 141

Department of Environmental Protection

Field Review of September 25, 1985

Robert Erling of the Siting Council met John Spellacy of the Department of Environmental Protection (DEP) for a field review of Petition No. 141. The DEP is petitioning the Council that no certificate of environmental compatibility and public need is necessary for the establishment of eight microwave sites in the towns of Oxford, Cornwall, Hartford, Sterling, Ledyard, and Colchester, Connecticut. Other state agencies presenting this petition include the Department of Public Safety's Division of State Police, and Office of Civil Preparedness, and the Department of Health Services' Office of Emergency Medical Services. These state agencies, with DEP, seek to implement the Connecticut Nuclear Emergency Communication System. This system, as required by the Federal Emergency Management Administration (FEMA) would provide the state agencies listed above with the capability of managing a radiological emergency which could result from a failure at either the Millstone or Haddam Neck nuclear power generating plants. The proposed system would allow the four state agencies to maintain direct radio communications with the nuclear plants at Millstone and Haddam Neck and with their respective headquarters in Hartford, as well as to maintain radio communications with their own field units.

Staff visited the eight proposed microwave sites with Mr. Spellacy. He explained that each of the proposed microwave sites would use an existing state-owned antenna or facility, and that no new tower construction would be necessary.

At the proposed Colchester site, a 4' parabolic dish would be added at the 98' level of a 100' self-supporting tower adjacent to the Troop K Headquarters of the Connecticut State Police.

In Sterling, DEP proposes to utilize the existing 70' Ekonk Hill Fire Tower. The cab section would be replaced with a new 10' section, and two 8' dishes would be added at the 65' level of the tower.

In Ledyard, a State Police owned 180' self-supporting tower on Vinegar Hill would be utilized. Two 8' and one 4' microwave dish would be added at the 176' and 90' levels respectively. There is a 6' cable television microwave dish at the 110' level of this tower.

Hartford would be the site of three microwave facilities. One 4' dish would be added to the elevator penthouse of the State Police Headquarters at 100 Washington Street. There is presently a 60' tower at this location. Four antennas, measuring 6', 4', 6' and 4' would be added to the roof top

elevator penthouses of the State Office Building. There is an existing DEP antenna located on one of these penthouses. Two of these dishes would face west, one would face east, and one would face south. One 4' dish would be added to the roof top at the east wing of the State Armory Building. The Armory has five existing antennas on its roof.

In Cornwall, the existing 180' self-supporting Regional Emergency Medical Services tower on Mohawk Mountain would have two 8' dishes added, one at the 75' level, and one at the 105' level. There is a 6' dish, currently unused, at the 172' level of this tower.

A converted fire tower in Oxford would be modified by removing its cab section and replacing it with a tower section 10' in height. This reconfiguration would result in a self-supporting tower 84' in height. An 8' dish would be added at the 80' level of this tower. One whip antenna would also be added to this tower for low band frequencies.

In a telephone conversation with the Director of DEP's Planning and Development Bureau, Richard D. Couch, Staff confirmed that the proposed system would cost \$1,200,000 and would have been a valuable asset during the recent hurricane. The proposed system would also provide microwave channels for a consortium of police departments in the Hartford area.

No expansion of the sites themselves would be necessary, nor would new access roads be needed. The addition of the proposed microwave facilities would not increase the total radio frequency electromagnetic radiation power densities at the proposed facility site boundaries to or above .1 milliwatt/Cm².

Robert K. Erling
Siting Analyst

RKE/cp

Exhibit B

Property Card



Property Information

| | |
|------------------------|------------------------------------|
| Owner | DON & DAVE FARM REALTY LLC |
| Address | 691 OXFORD RD |
| Mailing Address | 691 OXFORD RD OXFORD , CT 06478 |
| Land Use | - Commercial |
| Land Class | C |

| | |
|--------------------------|---------|
| Census Tract | L 92 |
| Neighborhood | C05 |
| Zoning | OPD |
| Acreage | 65.88 |
| Utilities | |
| Lot Setting/ Desc | / Clear |

Photo



PARCEL VALUATIONS (Assessed value = 70% of Appraised Value)

| | Appraised | Assessed |
|---------------------|-----------|----------|
| Buildings | 301800 | 211300 |
| Outbuildings | 71900 | 50400 |
| Improvements | 373700 | 261700 |
| Extras | 0 | 0 |
| Land | 955800 | 237900 |
| Total | 1329500 | 499600 |
| Previous | | |

Construction Details

| | |
|---------------------------|-----------|
| Year Built | |
| Stories | |
| Building Style | |
| Building Use | |
| Building Condition | |
| Total Rooms | |
| Bedrooms | |
| Full Bathrooms | 0 |
| Half Bathrooms | |
| Bath Style | |
| Kitchen Style | |
| Roof Style | Gable |
| Roof Cover | Metal/Tin |

EXTERIOR WALLS:

| | |
|------------------|---------------|
| Primary | NONE |
| Secondary | Stone/Masonry |

INTERIOR WALLS:

| | |
|------------------|---------------|
| Primary | Minim/Masonry |
| Secondary | |

FLOORS:

| | |
|------------------|----------------|
| Primary | Concr-Finished |
| Secondary | |

HEATING/AC:

| | |
|---------------------|--------------|
| Heating Type | None |
| Heating Fuel | Coal or Wood |
| AC Type | None |

BUILDING AREA:

| | |
|--------------------------------|--|
| Effective Building Area | |
| Gross Building Area | |
| Total Living Area | |


SALES HISTORY:

| | |
|-------------------|-----------|
| Sale Date | 11/7/2007 |
| Sale Price | 0 |
| Book/ Page | 332/ 764 |

Town of Oxford, Connecticut - Assessment Parcel Map


Parcel: 19-58-3

Location: 691 OXFORD RD

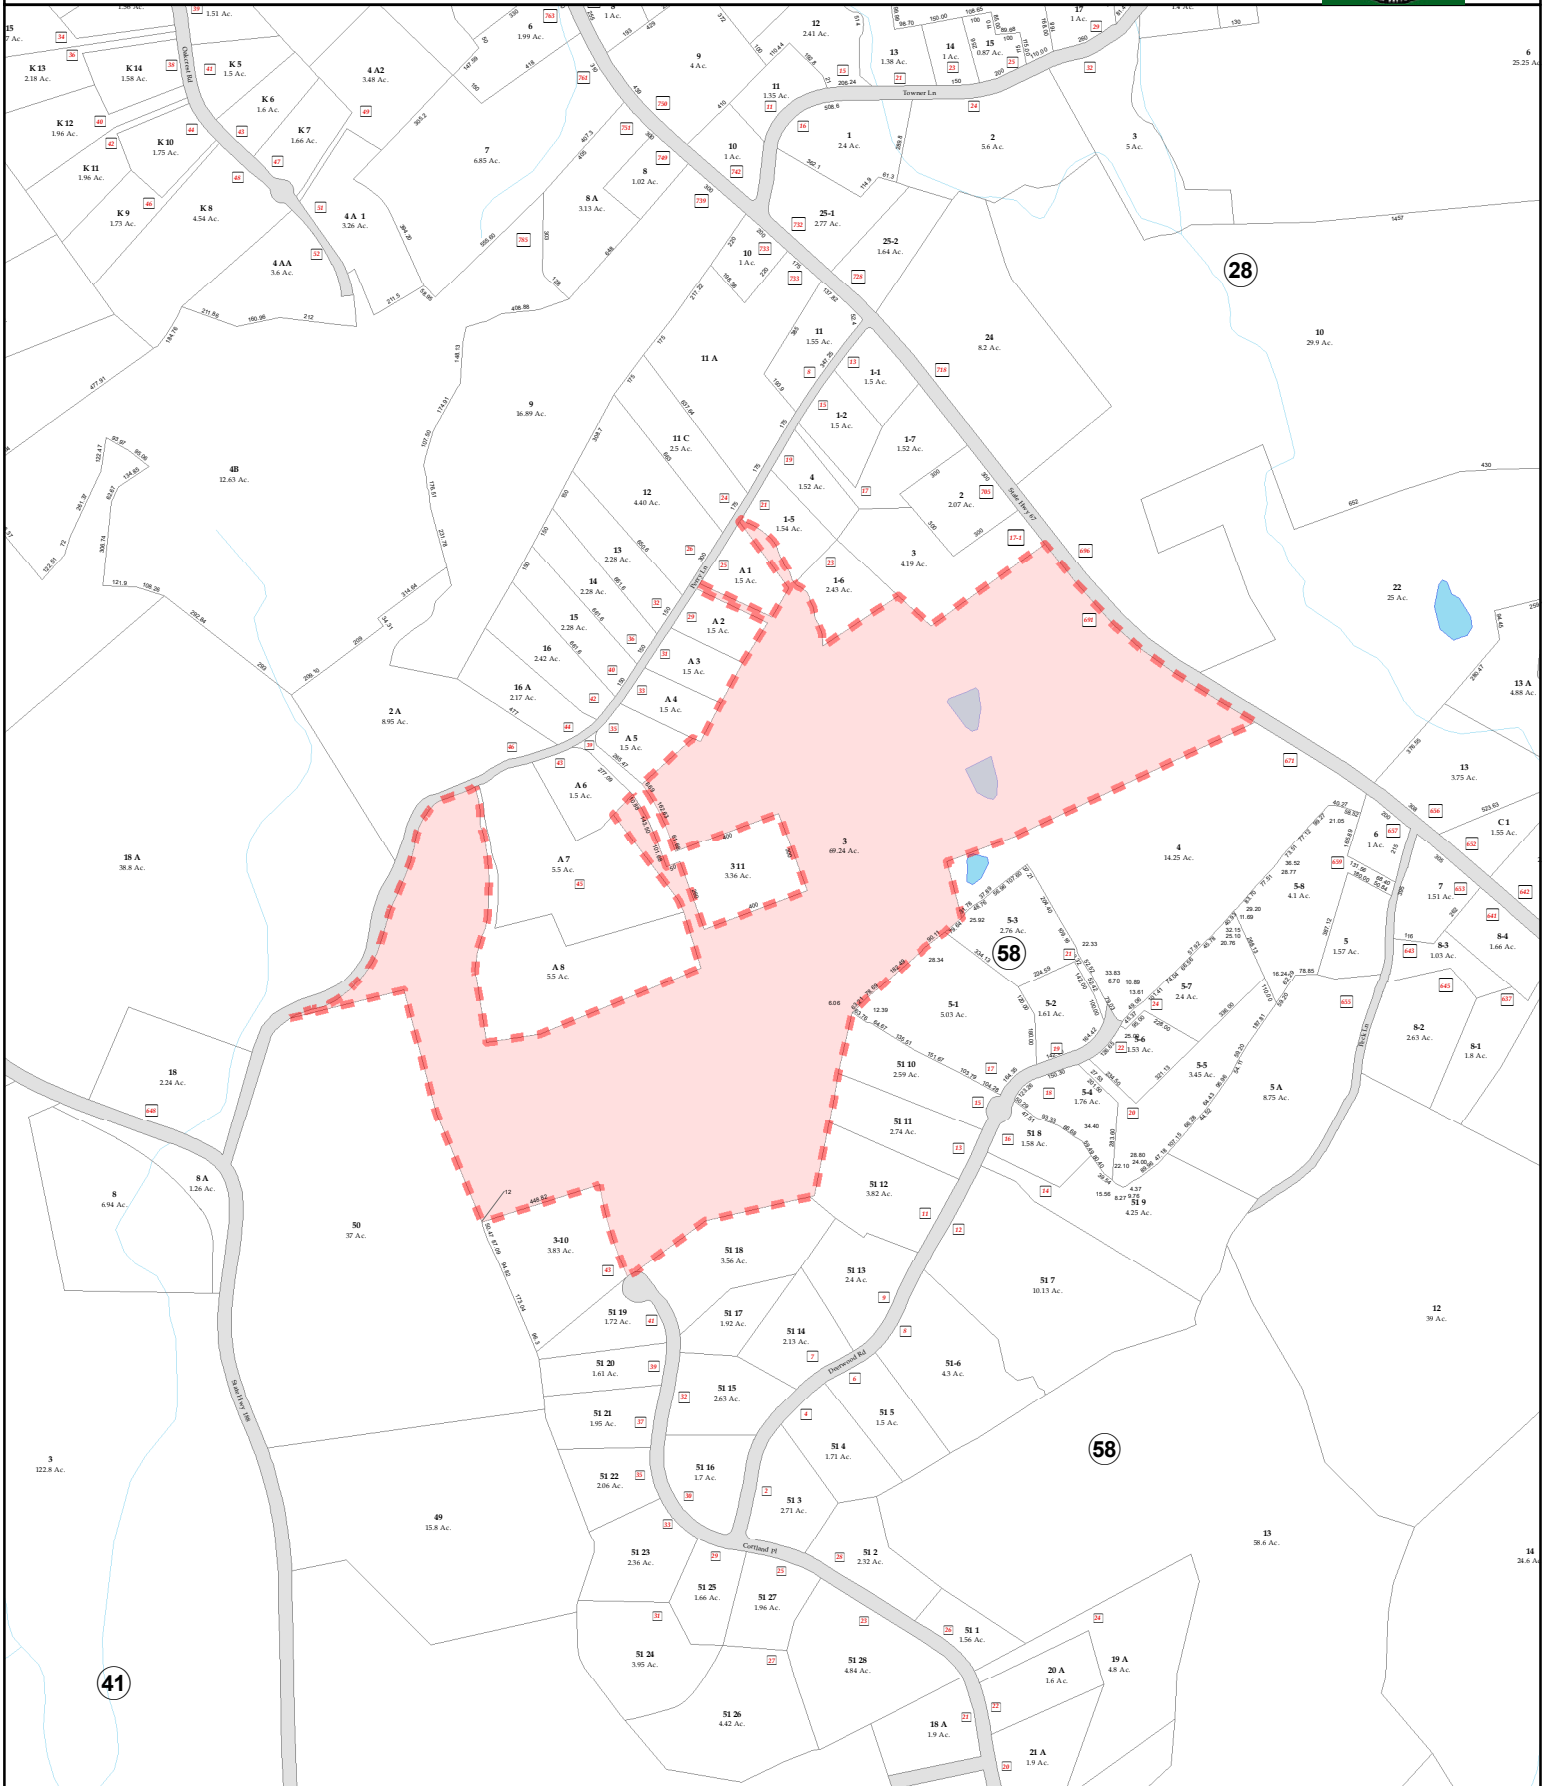

Approximate Scale: 1 inch = 700 feet

Map Produced: February 2021



Disclaimer: This map is for informational purposes only. All information is subject to verification by any user. The Town of Oxford and its mapping contractors assume no legal responsibility for the information contained herein.

Exhibit C

Construction Drawings



VERIZON SITE NUMBER: 468396
VERIZON SITE NAME: OXFORD NORTH CT
SITE TYPE: MONOPOLE
TOWER HEIGHT: 150'-0"

BUSINESS UNIT #: 873645
SITE ADDRESS: 691 OXFORD ROAD
 OXFORD, CT 06478
COUNTY: NEW HAVEN
JURISDICTION: NEW HAVEN COUNTY

VERIZON FUZE PROJECT #: 16272605

verizon
 180 WASHINGTON VALLEY ROAD
 BEDMINSTER, NJ 07921

CROWN CASTLE
 1500 CORPORATE DRIVE
 CANONSBURG, PA 15317

INFINIGY
 FROM ZERO TO INFINIGY
 the solutions are endless
 BELLEVUE, WA 98004

VERIZON SITE NUMBER:
 468396
BU #: 873645
OXFORD
 691 OXFORD ROAD
 OXFORD, CT 06478
 EXISTING 150'-0" MONOPOLE

ISSUED FOR:

| REV | DATE | DRWN | DESCRIPTION | DES./QA |
|-----|------------|------|-------------|---------|
| 0 | 06/03/2021 | RCD | FINAL CDs | -- |
| 1 | 07/01/2021 | PEG | FINAL CDs | -- |

SITE INFORMATION

CROWN CASTLE USA INC. OXFORD
 SITE NAME:
 SITE ADDRESS: 691 OXFORD ROAD
 OXFORD, CT 06478
 COUNTY: NEW HAVEN
 MAP/PARCEL #: VERIFY
 AREA OF CONSTRUCTION: EXISTING
 LATITUDE: 41° 26' 49.51" N (41.447086°)
 LONGITUDE: 73° 9' 8.31" W (-73.152308°)
 LAT/LONG TYPE: NAD83
 GROUND ELEVATION: 662.6'
 CURRENT ZONING: TBD
 JURISDICTION: NEW HAVEN COUNTY
 OCCUPANCY CLASSIFICATION: U
 TYPE OF CONSTRUCTION: IIB
 A.D.A. COMPLIANCE: FACILITY IS UNMANNED AND NOT FOR HUMAN HABITATION
 PROPERTY OWNER: RICH, DAVID G. AND DONALD J.
 691 OXFORD RD.
 OXFORD, CT 06478
 TOWER OWNER: CCATT LLC
 1500 CORPORATE DRIVE
 CANONSBURG, PA 15317
 CARRIER/APPLICANT: VERIZON WIRELESS
 180 WASHINGTON VALLEY ROAD
 BEDMINSTER, NJ 07921
 ELECTRIC PROVIDER: TBD
 TELCO PROVIDER: TBD

DRAWING INDEX

| SHEET # | SHEET DESCRIPTION |
|---------|---------------------------------|
| T-1 | TITLE SHEET |
| T-2 | GENERAL NOTES |
| C-1 | SITE PLAN |
| C-2 | TOWER ELEVATION & ANTENNA PLANS |
| C-3 | EQUIPMENT SCHEDULES |
| C-4 | EQUIPMENT DETAILS |
| C-5 | EQUIPMENT DETAILS |
| C-6 | PLUMBING DIAGRAM |
| G-1 | GROUNDING DETAILS |
| G-2 | GROUNDING DETAILS |

ALL DRAWINGS CONTAINED HEREIN ARE FORMATTED FOR 11X17. CONTRACTOR SHALL VERIFY ALL PLANS AND EXISTING DIMENSIONS AND CONDITIONS ON THE JOB SITE AND SHALL IMMEDIATELY NOTIFY THE ENGINEER IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK OR BE RESPONSIBLE FOR SAME.

APPROVALS

| SIGNATURE | DATE |
|-----------|-------|
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |

CONTRACTOR PMI REQUIREMENTS


PMI ACCESSED AT <https://pmi.vxwsmart.com>
 SMART TOOL VENDOR PROJECT NUMBER TBD
 VzW LOCATION CODE (PSLC) 467643
 *** PMI AND REQUIREMENTS ALSO EMBEDDED IN MOUNT ANALYSIS REPORT

MOUNT MODIFICATION REQUIRED N

VzW APPROVED SMART KIT VENDORS

REFER TO MOUNT MODIFICATION DRAWINGS PAGE FOR VzW SMART KIT APPROVED VENDORS

LOCATION MAP

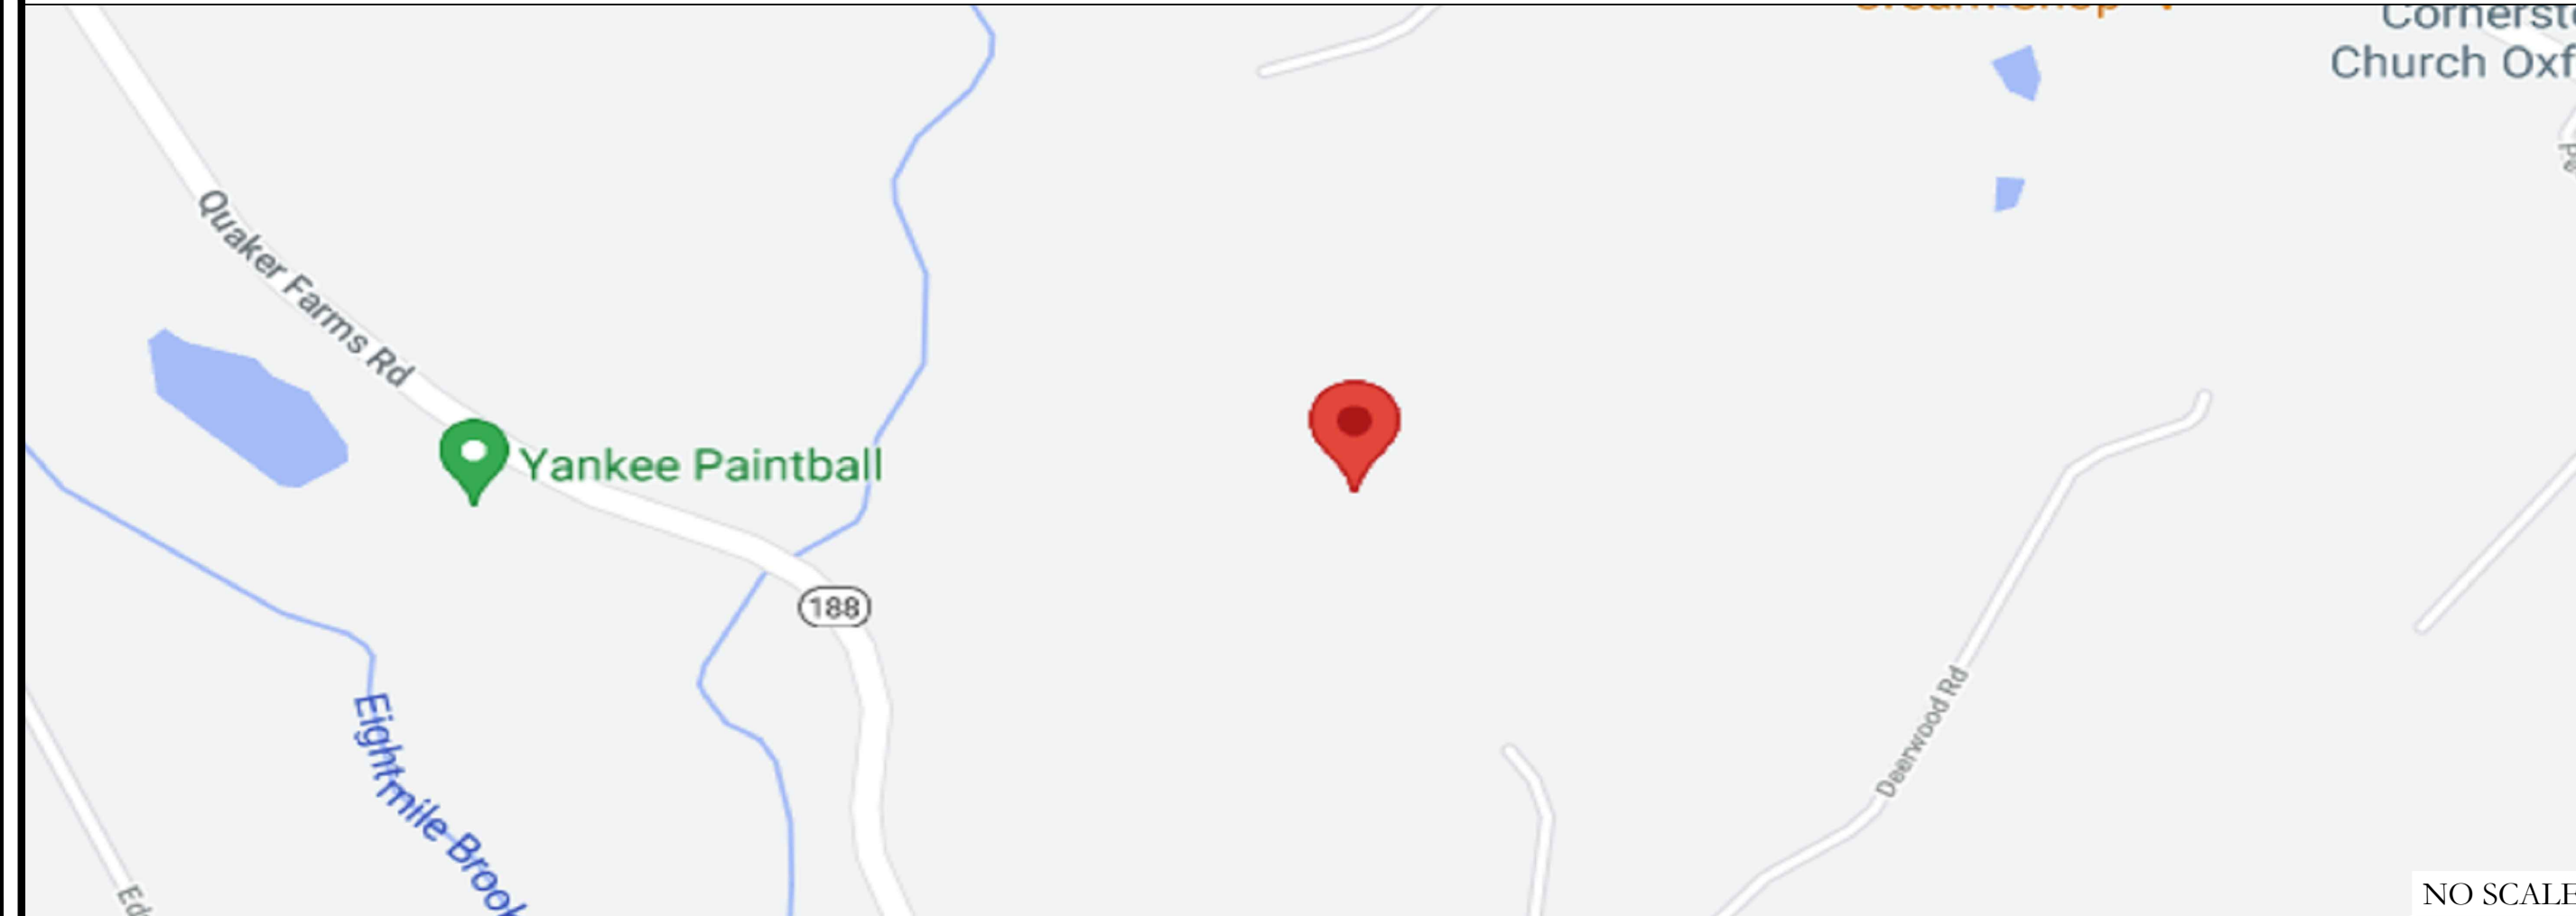

DRIVING DIRECTIONS FROM VERIZON LOCAL OFFICE (180 WASHINGTON VALLEY RD, BEDMINSTER, NJ 07921) DEPART AND HEAD TOWARDS WASHINGTON VALLEY RD / COUNTY HWY-620, TURN LEFT ONTO WASHINGTON VALLEY RD / COUNTY HWY-620, BEAR RIGHT ONTO US-206 N / US-202 N / US HIGHWAY 202 206, BEAR RIGHT ONTO US-202 N / US-206 N / US HIGHWAY 202 206, TURN RIGHT ONTO SCHLEY MOUNTAIN RD, TAKE THE RAMP ON THE LEFT FOR I-287 N, PASS DAYS INN ON THE RIGHT, AT JUNCTION 9E, HEAD RIGHT ON THE RAMP FOR I-84 EAST TOWARDS DANBURY, AT JUNCTION 15, HEAD RIGHT ON THE RAMP FOR CT-67 / US-6 EAST TOWARDS SOUTHURY, ROAD NAME CHANGES TO CT-67 / SOUTHFORD RD, TURN RIGHT ONTO HOGS BACK RD, TURN RIGHT ONTO MACINTOSH DR, TURN LEFT ONTO CORTLAND PL, ARRIVE AT 691 OXFORD ROAD, OXFORD, CT 06478.

APPLICABLE CODES/REFERENCE DOCUMENTS

ALL WORK SHALL BE PERFORMED AND MATERIALS INSTALLED IN ACCORDANCE WITH THE CURRENT EDITIONS OF THE FOLLOWING CODES AS ADOPTED BY THE LOCAL GOVERNING AUTHORITIES. NOTHING IN THESE PLANS IS TO BE CONSTRUED TO PERMIT WORK NOT CONFORMING TO THESE CODES:

| CODE TYPE | CODE |
|------------|-----------------------------|
| BUILDING | 2018 CT STATE BUILDING CODE |
| MECHANICAL | 2015 IMC |
| ELECTRICAL | 2017 NEC |

REFERENCE DOCUMENTS:

STRUCTURAL ANALYSIS: BY OTHERS
 DATED:
 MOUNT ANALYSIS: MASER CONSULTING CONNECTICUT
 DATED: 05/07/2021
 RFDS REVISION: TBD
 DATED: 02/24/2021
 ORDER ID: 552681
 REVISION: 0

PROJECT DESCRIPTION

THE PURPOSE OF THIS PROJECT IS TO ENHANCE BROADBAND CONNECTIVITY AND CAPACITY TO THE EXISTING ELIGIBLE WIRELESS FACILITY.


- TOWER SCOPE OF WORK:
- REMOVE (3) ANTENNAS
 - INSTALL (3) ANTENNAS
 - REMOVE (6) RRHs
 - INSTALL (6) RRHs
 - INSTALL (3) DIPLEXERS

- GROUND SCOPE OF WORK:
- N/A

NOTE:
 PRIOR TO ACCESSING/ENTERING THE SITE YOU MUST CONTACT THE CROWN NOC AT (800) 788-7011 & CROWN CONSTRUCTION MANAGER

PROJECT TEAM


A&E FIRM: CROWN CASTLE USA INC.
 2000 CORPORATE DRIVE
 CANONSBURG, PA 15317
 CROWNNAE.APPROVAL@CROWNCastle.COM
 CROWN CASTLE USA INC. DISTRICT CONTACTS:
 1505 WESTLAKE AVENUE NORTH, SUITE 800
 SEATTLE, WA 98109
 TBD - PROJECT MANAGER
 --
 TBD - CONSTRUCTION MANAGER
 --
 VERIZON CONTACT: TIMOTHY PARKS
 TIMOTHY.PARKS@VERIZONWIRELESS.COM

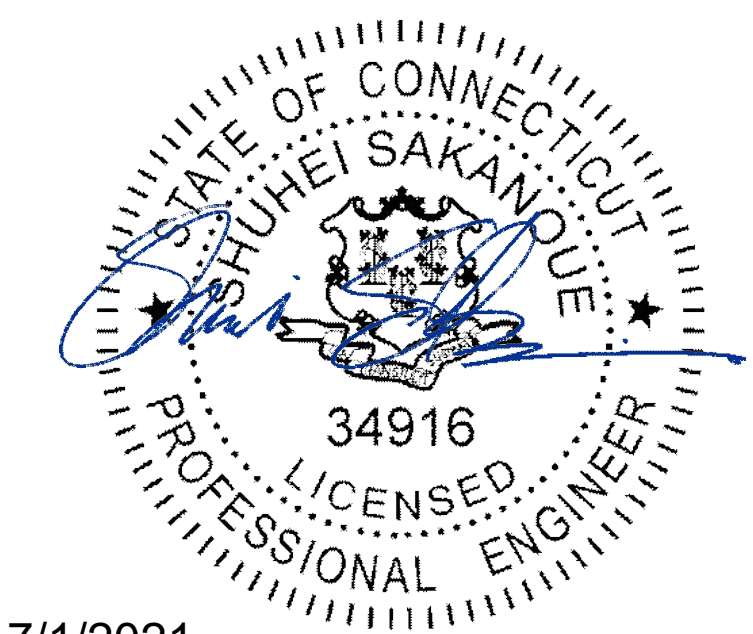

7/1/2021

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SHEET NUMBER: T-1
REVISION: 1



CROWN CASTLE USA INC. SITE ACTIVITY REQUIREMENTS:

- NOTICE TO PROCEED- NO WORK SHALL COMMENCE PRIOR TO CROWN CASTLE USA INC. WRITTEN NOTICE TO PROCEED (NTP) AND THE ISSUANCE OF A PURCHASE ORDER. PRIOR TO ACCESSING/ENTERING THE SITE YOU MUST CONTACT THE CROWN CASTLE USA INC. NOC AT 800-788-7011 & THE CROWN CASTLE USA INC. CONSTRUCTION MANAGER.
- "LOOK UP" - CROWN CASTLE USA INC. SAFETY CLIMB REQUIREMENT: THE INTEGRITY OF THE SAFETY CLIMB AND ALL COMPONENTS OF THE CLIMBING FACILITY SHALL BE CONSIDERED DURING ALL STAGES OF DESIGN, INSTALLATION, AND INSPECTION. TOWER MODIFICATION, MOUNT REINFORCEMENTS, AND/OR EQUIPMENT INSTALLATIONS SHALL NOT COMPROMISE THE INTEGRITY OR FUNCTIONAL USE OF THE SAFETY CLIMB OR ANY COMPONENTS OF THE CLIMBING FACILITY ON THE STRUCTURE. THIS SHALL INCLUDE, BUT NOT BE LIMITED TO: PINCHING OF THE WIRE ROPE, BENDING OF THE WIRE ROPE FROM ITS SUPPORTS, DIRECT CONTACT OR CLOSE PROXIMITY TO THE WIRE ROPE WHICH MAY CAUSE FRICTIONAL WEAR, IMPACT TO THE ANCHORAGE POINTS IN ANY WAY, OR TO IMPEDE/BLOCK ITS INTENDED USE. ANY COMPROMISED SAFETY CLIMB, INCLUDING EXISTING CONDITIONS MUST BE TAGGED OUT AND REPORTED TO YOUR CROWN CASTLE USA INC. POC OR CALL THE NOC TO GENERATE A SAFETY CLIMB MAINTENANCE AND CONTRACTOR NOTICE TICKET.
- PRIOR TO THE START OF CONSTRUCTION, ALL REQUIRED JURISDICTIONAL PERMITS SHALL BE OBTAINED. THIS INCLUDES, BUT IS NOT LIMITED TO, BUILDING, ELECTRICAL, MECHANICAL, FIRE, FLOOD ZONE, ENVIRONMENTAL, AND ZONING. AFTER ONSITE ACTIVITIES AND CONSTRUCTION ARE COMPLETED, ALL REQUIRED PERMITS SHALL BE SATISFIED AND CLOSED OUT ACCORDING TO LOCAL JURISDICTIONAL REQUIREMENTS.
- ALL CONSTRUCTION MEANS AND METHODS; INCLUDING BUT NOT LIMITED TO, ERECTION PLANS, RIGGING PLANS, CLIMBING PLANS, AND RESCUE PLANS SHALL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR RESPONSIBLE FOR THE EXECUTION OF THE WORK CONTAINED HEREIN, AND SHALL MEET ANS/ASSE A10.48 (LATEST EDITION); FEDERAL, STATE, AND LOCAL REGULATIONS; AND ANY APPLICABLE INDUSTRY CONSENSUS STANDARDS RELATED TO THE CONSTRUCTION ACTIVITIES BEING PERFORMED. ALL RIGGING PLANS SHALL ADHERE TO ANS/ASSE A10.48 (LATEST EDITION) AND CROWN CASTLE USA INC. STANDARD CED-STD-10253, INCLUDING THE REQUIRED INVOLVEMENT OF A QUALIFIED ENGINEER FOR CLASS IV CONSTRUCTION, TO CERTIFY THE SUPPORTING STRUCTURE(S) IN ACCORDANCE WITH ANS/TIA-322 (LATEST EDITION).
- ALL SITE WORK TO COMPLY WITH QAS-STD-10068 "INSTALLATION STANDARDS FOR CONSTRUCTION ACTIVITIES ON CROWN CASTLE USA INC. TOWER SITE," CED-STD-10294 "STANDARD FOR INSTALLATION OF MOUNTS AND APPURTENANCES," AND LATEST VERSION OF ANS/TIA-1019-A-2012 "STANDARD FOR INSTALLATION, ALTERATION, AND MAINTENANCE OF ANTENNA SUPPORTING STRUCTURES AND ANTENNAS." IF THE SPECIFIED EQUIPMENT CAN NOT BE INSTALLED AS SHOWN ON THESE DRAWINGS, THE CONTRACTOR SHALL PROPOSE AN ALTERNATIVE INSTALLATION FOR APPROVAL BY CROWN CASTLE USA INC. PRIOR TO PROCEEDING WITH ANY SUCH CHANGE OF INSTALLATION.
- ALL MATERIALS FURNISHED AND INSTALLED SHALL BE IN STRICT ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS AND ORDINANCES. CONTRACTOR SHALL ISSUE ALL APPROPRIATE NOTICES AND COMPLY WITH ALL LAWS, ORDINANCES, RULES, REGULATIONS AND LAWFUL ORDERS OF ANY PUBLIC AUTHORITY REGARDING THE PERFORMANCE OF THE WORK. ALL WORK CARRIED OUT SHALL COMPLY WITH ALL APPLICABLE MUNICIPAL AND UTILITY COMPANY SPECIFICATIONS AND LOCAL JURISDICTIONAL CODES, ORDINANCES AND APPLICABLE REGULATIONS.
- THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT AND MATERIALS IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS UNLESS SPECIFICALLY STATED OTHERWISE.
- THE CONTRACTOR SHALL CONTACT UTILITY LOCATING SERVICES PRIOR TO THE START OF CONSTRUCTION.
- ALL EXISTING ACTIVE SEWER, WATER, GAS, ELECTRIC AND OTHER UTILITIES WHERE ENCOUNTERED IN THE WORK, SHALL BE PROTECTED AT ALL TIMES AND WHERE REQUIRED FOR THE PROPER EXECUTION OF THE WORK, SHALL BE RELOCATED AS DIRECTED BY CONTRACTOR. EXTREME CAUTION SHOULD BE USED BY THE CONTRACTOR WHEN EXCAVATING OR DRILLING PIERS AROUND OR NEAR UTILITIES. CONTRACTOR SHALL PROVIDE SAFETY TRAINING FOR THE WORKING CREW. THIS WILL INCLUDE BUT NOT BE LIMITED TO A) FALL PROTECTION B) CONFINED SPACE C) ELECTRICAL SAFETY D) TRENCHING AND EXCAVATION E) CONSTRUCTION SAFETY PROCEDURES.
- ALL SITE WORK SHALL BE AS INDICATED ON THE STAMPED CONSTRUCTION DRAWINGS AND PROJECT SPECIFICATIONS. LATEST APPROVED REVISION.
- CONTRACTOR SHALL KEEP THE SITE FREE FROM ACCUMULATING WASTE MATERIAL, DEBRIS, AND TRASH AT THE COMPLETION OF THE WORK. IF NECESSARY, RUBBISH, STUMPS, DEBRIS, STICKS, STONES AND OTHER REFUSE SHALL BE REMOVED FROM THE SITE AND DISPOSED OF LEGALLY.
- ALL EXISTING INACTIVE SEWER, WATER, GAS, ELECTRIC AND OTHER UTILITIES, WHICH INTERFERE WITH THE EXECUTION OF THE WORK, SHALL BE REMOVED AND/OR CAPPED, PLUGGED OR OTHERWISE DISCONTINUED AT POINTS WHICH WILL NOT INTERFERE WITH THE EXECUTION OF THE WORK, SUBJECT TO THE APPROVAL OF CONTRACTOR, TOWER OWNER, CROWN CASTLE USA INC., AND/OR LOCAL UTILITIES.
- THE CONTRACTOR SHALL PROVIDE SITE SIGNAGE IN ACCORDANCE WITH THE TECHNICAL SPECIFICATION FOR SITE SIGNAGE REQUIRED BY LOCAL JURISDICTION AND SIGNAGE REQUIRED ON INDIVIDUAL PIECES OF EQUIPMENT, ROOMS, AND SHELTERS.
- THE SITE SHALL BE GRADED TO CAUSE SURFACE WATER TO FLOW AWAY FROM THE CARRIER'S EQUIPMENT AND TOWER AREAS.
- THE SUB GRADE SHALL BE COMPACTED AND BROUGHT TO A SMOOTH UNIFORM GRADE PRIOR TO FINISHED SURFACE APPLICATION.
- THE AREAS OF THE OWNERS PROPERTY DISTURBED BY THE WORK AND NOT COVERED BY THE TOWER, EQUIPMENT OR DRIVEWAY, SHALL BE GRADED TO A UNIFORM SLOPE, AND STABILIZED TO PREVENT EROSION AS SPECIFIED ON THE CONSTRUCTION DRAWINGS AND/OR PROJECT SPECIFICATIONS.
- CONTRACTOR SHALL MINIMIZE DISTURBANCE TO EXISTING SITE DURING CONSTRUCTION. EROSION CONTROL MEASURES, IF REQUIRED DURING CONSTRUCTION, SHALL BE IN CONFORMANCE WITH THE LOCAL GUIDELINES FOR EROSION AND SEDIMENT CONTROL.
- THE CONTRACTOR SHALL PROTECT EXISTING IMPROVEMENTS, PAVEMENTS, CURBS, LANDSCAPING AND STRUCTURES. ANY DAMAGED PART SHALL BE REPAIRED AT CONTRACTOR'S EXPENSE TO THE SATISFACTION OF OWNER.
- CONTRACTOR SHALL LEGALLY AND PROPERLY DISPOSE OF ALL SCRAP MATERIALS SUCH AS COAXIAL CABLES AND OTHER ITEMS REMOVED FROM THE EXISTING FACILITY. ANTENNAS REMOVED SHALL BE RETURNED TO THE OWNER'S DESIGNATED LOCATION.
- CONTRACTOR SHALL LEAVE PREMISES IN CLEAN CONDITION. TRASH AND DEBRIS SHOULD BE REMOVED FROM SITE ON A DAILY BASIS.
- NO FILL OR EMBANKMENT MATERIAL SHALL BE PLACED ON FROZEN GROUND. FROZEN MATERIALS, SNOW OR ICE SHALL NOT BE PLACED IN ANY FILL OR EMBANKMENT.

GENERAL NOTES:

- FOR THE PURPOSE OF CONSTRUCTION DRAWING, THE FOLLOWING DEFINITIONS SHALL APPLY:
CONTRACTOR: GENERAL CONTRACTOR RESPONSIBLE FOR CONSTRUCTION
CARRIER: VERIZON
TOWER OWNER: CROWN CASTLE USA INC.
- THESE DRAWINGS HAVE BEEN PREPARED USING STANDARDS OF PROFESSIONAL CARE AND COMPLETENESS NORMALLY EXERCISED UNDER SIMILAR CIRCUMSTANCES BY REPUTABLE ENGINEERS IN THIS OR SIMILAR LOCALITIES. IT IS ASSUMED THAT THE WORK DEPICTED WILL BE PERFORMED BY AN EXPERIENCED CONTRACTOR AND/OR WORKPEOPLE WHO HAVE A WORKING KNOWLEDGE OF THE APPLICABLE CODE STANDARDS AND REQUIREMENTS AND OF INDUSTRY ACCEPTED STANDARD GOOD PRACTICE. AS NOT EVERY CONDITION OR ELEMENT IS (OR CAN BE) EXPLICITLY SHOWN ON THESE DRAWINGS, THE CONTRACTOR SHALL USE INDUSTRY ACCEPTED STANDARD GOOD PRACTICE FOR MISCELLANEOUS WORK NOT EXPLICITLY SHOWN.
- THESE DRAWINGS REPRESENT THE FINISHED STRUCTURE. THEY DO NOT INDICATE THE MEANS OR METHODS OF CONSTRUCTION. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR THE CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, AND PROCEDURES. THE CONTRACTOR SHALL PROVIDE ALL MEASURES NECESSARY FOR PROTECTION OF LIFE AND PROPERTY DURING CONSTRUCTION. SUCH MEASURES SHALL INCLUDE, BUT NOT BE LIMITED TO, BRACING, FORMWORK, SHORING, ETC. SITE VISITS BY THE ENGINEER OR HIS REPRESENTATIVE WILL NOT INCLUDE INSPECTION OF THESE ITEMS AND IS FOR STRUCTURAL OBSERVATION OF THE FINISHED STRUCTURE ONLY. NOTES AND DETAILS IN THE CONSTRUCTION DRAWINGS SHALL TAKE PRECEDENCE OVER GENERAL NOTES AND TYPICAL DETAILS, WHERE NO DETAILS ARE SHOWN, CONSTRUCTION SHALL CONFORM TO SIMILAR WORK ON THE PROJECT, AND/OR AS PROVIDED FOR IN THE CONTRACT DOCUMENTS. WHERE DISCREPANCIES OCCUR BETWEEN PLANS, DETAILS, GENERAL NOTES, AND SPECIFICATIONS, THE GREATER, MORE STRICT REQUIREMENTS, SHALL GOVERN. IF FURTHER CLARIFICATION IS REQUIRED CONTACT THE ENGINEER OF RECORD.
- SUBSTANTIAL EFFORT HAS BEEN MADE TO PROVIDE ACCURATE DIMENSIONS AND MEASUREMENTS ON THE DRAWINGS TO ASSIST IN THE FABRICATION AND/OR PLACEMENT OF CONSTRUCTION ELEMENTS BUT IT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO FIELD VERIFY THE DIMENSIONS, MEASUREMENTS, AND/OR CLEARANCES SHOWN IN THE CONSTRUCTION DRAWINGS PRIOR TO FABRICATION OR CUTTING OF ANY NEW OR EXISTING CONSTRUCTION ELEMENTS. IF IT IS DETERMINED THAT THERE ARE DISCREPANCIES AND/OR CONFLICTS WITH THE CONSTRUCTION DRAWINGS THE ENGINEER OF RECORD IS TO BE NOTIFIED AS SOON AS POSSIBLE.
- PRIOR TO THE SUBMISSION OF BIDS, THE BIDDING CONTRACTOR SHALL VISIT THE CELL SITE TO FAMILIARIZE WITH THE EXISTING CONDITIONS AND TO CONFIRM THAT THE WORK CAN BE ACCOMPLISHED AS SHOWN ON THE CONSTRUCTION DRAWINGS. ANY DISCREPANCY FOUND SHALL BE BROUGHT TO THE ATTENTION OF CROWN CASTLE.
- ALL MATERIALS FURNISHED AND INSTALLED SHALL BE IN STRICT ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS AND ORDINANCES. CONTRACTOR SHALL ISSUE ALL APPROPRIATE NOTICES AND COMPLY WITH ALL LAWS, ORDINANCES, RULES, REGULATIONS AND LAWFUL ORDERS OF ANY PUBLIC AUTHORITY REGARDING THE PERFORMANCE OF THE WORK. ALL WORK CARRIED OUT SHALL COMPLY WITH ALL APPLICABLE MUNICIPAL AND UTILITY COMPANY SPECIFICATIONS AND LOCAL JURISDICTIONAL CODES, ORDINANCES AND APPLICABLE REGULATIONS.
- UNLESS NOTED OTHERWISE, THE WORK SHALL INCLUDE FURNISHING MATERIALS, EQUIPMENT, APPURTENANCES AND LABOR NECESSARY TO COMPLETE ALL INSTALLATIONS AS INDICATED ON THE DRAWINGS.
- THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT AND MATERIALS IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS UNLESS SPECIFICALLY STATED OTHERWISE.
- IF THE SPECIFIED EQUIPMENT CAN NOT BE INSTALLED AS SHOWN ON THESE DRAWINGS, THE CONTRACTOR SHALL PROPOSE AN ALTERNATIVE INSTALLATION FOR APPROVAL BY THE CARRIER AND CROWN CASTLE PRIOR TO PROCEEDING WITH ANY SUCH CHANGE OF INSTALLATION.
- CONTRACTOR IS TO PERFORM A SITE INVESTIGATION AND IS TO DETERMINE THE BEST ROUTING OF ALL CONDUITS FOR POWER, AND TELCO AND FOR GROUNDING CABLES AS SHOWN IN THE POWER, TELCO, AND GROUNDING PLAN DRAWINGS.
- THE CONTRACTOR SHALL PROTECT EXISTING IMPROVEMENTS, PAVEMENTS, CURBS, LANDSCAPING AND STRUCTURES. ANY DAMAGED PART SHALL BE REPAIRED AT CONTRACTOR'S EXPENSE TO THE SATISFACTION OF CROWN CASTLE USA INC.
- CONTRACTOR SHALL LEGALLY AND PROPERLY DISPOSE OF ALL SCRAP MATERIALS SUCH AS COAXIAL CABLES AND OTHER ITEMS REMOVED FROM THE EXISTING FACILITY. ANTENNAS REMOVED SHALL BE RETURNED TO THE OWNER'S DESIGNATED LOCATION.
- CONTRACTOR SHALL LEAVE PREMISES IN CLEAN CONDITION. TRASH AND DEBRIS SHOULD BE REMOVED FROM SITE ON A DAILY BASIS.

CONCRETE, FOUNDATIONS, AND REINFORCING STEEL:

- ALL CONCRETE WORK SHALL BE IN ACCORDANCE WITH THE ACI 301, ACI 318, ACI 336, ASTM A184, ASTM A185 AND THE DESIGN AND CONSTRUCTION SPECIFICATION FOR CAST-IN-PLACE CONCRETE.
- UNLESS NOTED OTHERWISE, SOIL BEARING PRESSURE USED FOR DESIGN OF SLABS AND FOUNDATIONS IS ASSUMED TO BE 1000 psf.
- ALL CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH (f'c) OF 3000 psi AT 28 DAYS, UNLESS NOTED OTHERWISE. NO MORE THAN 90 MINUTES SHALL ELAPSE FROM BATCH TIME TO TIME OF PLACEMENT UNLESS APPROVED BY THE ENGINEER OF RECORD. TEMPERATURE OF CONCRETE SHALL NOT EXCEED 90°F AT TIME OF PLACEMENT.
- CONCRETE EXPOSED TO FREEZE-THAW CYCLES SHALL CONTAIN AIR ENTRAINING ADMIXTURES. AMOUNT OF AIR ENTRAINMENT TO BE BASED ON SIZE OF AGGREGATE AND F3 CLASS EXPOSURE (VERY SEVERE). CEMENT USED TO BE TYPE II PORTLAND CEMENT WITH A MAXIMUM WATER-TO-CEMENT RATIO (W/C) OF 0.45.
- ALL STEEL REINFORCING SHALL CONFORM TO ASTM A615. ALL WELDED WIRE FABRIC (WWF) SHALL CONFORM TO ASTM A185. ALL SPLICES SHALL BE CLASS "B" TENSION SPLICES, UNLESS NOTED OTHERWISE. ALL HOOKS SHALL BE STANDARD 90 DEGREE HOOKS, UNLESS NOTED OTHERWISE. YIELD STRENGTH (Fy) OF STANDARD DEFORMED BARS ARE AS FOLLOWS:
#4 BARS AND SMALLER.....40 ksi
#5 BARS AND LARGER.....60 ksi
- THE FOLLOWING MINIMUM CONCRETE COVER SHALL BE PROVIDED FOR REINFORCING STEEL UNLESS SHOWN OTHERWISE ON DRAWINGS:
CONCRETE CAST AGAINST AND PERMANENTLY EXPOSED TO EARTH.....3"
CONCRETE EXPOSED TO EARTH OR WEATHER:
#6 BARS AND LARGER.....2"
#5 BARS AND SMALLER.....1-1/2"
CONCRETE NOT EXPOSED TO EARTH OR WEATHER:
SLAB AND WALLS.....3/4"
BEAMS AND COLUMNS.....1-1/2"
- A TOOLED EDGE OR A 3/4" CHAMFER SHALL BE PROVIDED AT ALL EXPOSED EDGES OF CONCRETE, UNLESS NOTED OTHERWISE, IN ACCORDANCE WITH ACI 301 SECTION 4.2.4.

ELECTRICAL INSTALLATION NOTES:

- ALL ELECTRICAL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS, NEC AND ALL APPLICABLE FEDERAL, STATE, AND LOCAL CODES/ORDINANCES.
- CONDUIT ROUTINGS ARE SCHEMATIC. CONTRACTOR SHALL INSTALL CONDUITS SO THAT ACCESS TO EQUIPMENT IS NOT BLOCKED AND TRIP HAZARDS ARE ELIMINATED.
- WIRING, RACEWAY AND SUPPORT METHODS AND MATERIALS SHALL COMPLY WITH THE REQUIREMENTS OF THE NEC.
- ALL CIRCUITS SHALL BE SEGREGATED AND MAINTAIN MINIMUM CABLE SEPARATION AS REQUIRED BY THE NEC.
 - ALL EQUIPMENT SHALL BEAR THE UNDERWRITERS LABORATORIES LABEL OF APPROVAL, AND SHALL CONFORM TO REQUIREMENT OF THE NATIONAL ELECTRICAL CODE.
 - ALL OVERCURRENT DEVICES SHALL HAVE AN INTERRUPTING CURRENT RATING THAT SHALL BE GREATER THAN THE SHORT CIRCUIT CURRENT TO WHICH THEY ARE SUBJECTED, 22,000 AIC MINIMUM. VERIFY AVAILABLE SHORT CIRCUIT CURRENT DOES NOT EXCEED THE RATING OF ELECTRICAL EQUIPMENT IN ACCORDANCE WITH ARTICLE 110.24 NEC OR THE MOST CURRENT ADOPTED CODE PRE THE GOVERNING JURISDICTION.
- EACH END OF EVERY POWER PHASE CONDUCTOR, GROUNDING CONDUCTOR, AND TELCO CONDUCTOR OR CABLE SHALL BE LABELED WITH COLOR-CODED INSULATION OR ELECTRICAL TAPE (3M BRAND, 1/2" PLASTIC ELECTRICAL TAPE WITH UV PROTECTION, OR EQUAL). THE IDENTIFICATION METHOD SHALL CONFORM WITH NEC AND OSHA.
- ALL ELECTRICAL COMPONENTS SHALL BE CLEARLY LABELED WITH LAMICOID TAGS SHOWING THEIR RATED VOLTAGE, PHASE CONFIGURATION, WIRE CONFIGURATION, POWER OR AMPACITY RATING AND BRANCH CIRCUIT ID NUMBERS (I.E. PANEL BOARD AND CIRCUIT ID'S).
- PANEL BOARDS (ID NUMBERS) SHALL BE CLEARLY LABELED WITH PLASTIC LABELS.
- ALL TIE WRAPS SHALL BE CUT FLUSH WITH APPROVED CUTTING TOOL TO REMOVE SHARP EDGES.
- ALL POWER AND EQUIPMENT GROUND WIRING IN TUBING OR CONDUIT SHALL BE SINGLE COPPER CONDUCTOR (#14 OR LARGER) WITH TYPE THW, THWN, THWN-2, XHHW, XHHW-2, THW, THW-2, RHW, OR RHW-2 INSULATION UNLESS OTHERWISE SPECIFIED.
- SUPPLEMENTAL EQUIPMENT GROUND WIRING LOCATED INDOORS SHALL BE SINGLE COPPER CONDUCTOR (#6 OR LARGER) WITH TYPE THW, THWN, THWN-2, XHHW, XHHW-2, THW, THW-2, RHW, OR RHW-2 INSULATION UNLESS OTHERWISE SPECIFIED.
- POWER AND CONTROL WIRING IN FLEXIBLE CORD SHALL BE MULTI-CONDUCTOR, TYPE SOOW CORD (#14 OR LARGER) UNLESS OTHERWISE SPECIFIED.
- POWER AND CONTROL WIRING FOR USE IN CABLE TRAY SHALL BE MULTI-CONDUCTOR, TYPE TC CABLE (#14 OR LARGER), WITH TYPE THW, THWN, THWN-2, XHHW, XHHW-2, THW, THW-2, RHW, OR RHW-2 INSULATION UNLESS OTHERWISE SPECIFIED.
- ALL POWER AND GROUNDING CONNECTIONS SHALL BE CRIMP-STYLE, COMPRESSION WIRE LUGS AND WIRE NUTS BY THOMAS AND BETTS (OR EQUAL). LUGS AND WIRE NUTS SHALL BE RATED FOR OPERATION NOT LESS THAN 75° C (90° C IF AVAILABLE).
- RACEWAY AND CABLE TRAY SHALL BE LISTED OR LABELED FOR ELECTRICAL USE IN ACCORDANCE WITH NEMA, UL, ANS/IEEE AND NEC.
- ELECTRICAL METALLIC TUBING (EMT), INTERMEDIATE METAL CONDUIT (IMC), OR RIGID METAL CONDUIT (RMC) SHALL BE USED FOR EXPOSED INDOOR LOCATIONS.
- ELECTRICAL METALLIC TUBING (EMT) OR METAL-CLAD CABLE (MC) SHALL BE USED FOR CONCEALED INDOOR LOCATIONS.
- SCHEDULE 40 PVC UNDERGROUND ON STRAIGHTS AND SCHEDULE 80 PVC FOR ALL ELBOWS/90S AND ALL APPROVED ABOVE GRADE PVC CONDUIT.
- LIQUID-TIGHT FLEXIBLE METALLIC CONDUIT (LIQUID-TITE FLEX) SHALL BE USED INDOORS AND OUTDOORS, WHERE VIBRATION OCCURS OR FLEXIBILITY IS NEEDED.
- CONDUIT AND TUBING FITTINGS SHALL BE THREADED OR COMPRESSION-TYPE AND APPROVED FOR THE LOCATION USED. SET SNEW FITTINGS ARE NOT ACCEPTABLE.
- CABINETS, BOXES AND WIRE WAYS SHALL BE LABELED FOR ELECTRICAL USE IN ACCORDANCE WITH NEMA, UL, ANS/IEEE AND THE NEC.
- WIREWAYS SHALL BE METAL WITH AN ENAMEL FINISH AND INCLUDE A HINGED COVER, DESIGNED TO SWING OPEN DOWNWARDS (WIREMOULD SPECIMATE WIREWAY).
- SLOTTED WIRING CTRT SHALL BE PVC AND INCLUDE COVER (PANDUIT TYPE E OR EQUAL).
- CONDUITS SHALL BE FASTENED SECURELY IN PLACE WITH APPROVED NON-PERFORATED STRAPS AND HANGERS. EXPLOSIVE DEVICES (I.E. POWDER-ACTUATED) FOR ATTACHING HANGERS TO STRUCTURE WILL NOT BE PERMITTED. CLOSELY FOLLOW THE LINES OF THE STRUCTURE, MAINTAIN CLOSE PROXIMITY TO THE STRUCTURE AND KEEP CONDUITS IN TIGHT ENVELOPES. CHANGES IN DIRECTION TO ROUTE AROUND OBSTACLES SHALL BE MADE WITH CONDUIT OUTLET BODIES. CONDUIT SHALL BE INSTALLED IN A NEAT AND WORKMANLIKE MANNER. PARALLEL AND PERPENDICULAR TO STRUCTURE WALL AND CEILING LINES. ALL CONDUIT SHALL BE FISHER TO CLEAR OBSTRUCTIONS. ENDS OF CONDUITS SHALL BE TEMPORARILY CAPPED FLUSH TO FINISH GRADE TO PREVENT CONCRETE, PLASTER OR DIRT FROM ENTERING. CONDUITS SHALL BE RIGIDLY CLAMPED TO BOXES BY GALVANIZED MALLEABLE IRON BUSHING ON INSIDE AND GALVANIZED MALLEABLE IRON LOCKNUT ON OUTSIDE AND INSIDE.
- EQUIPMENT CABINETS, TERMINAL BOXES, JUNCTION BOXES AND PULL BOXES SHALL BE GALVANIZED OR EPOXY-COATED SHEET STEEL. SHALL MEET OR EXCEED UL 50 AND BE RATED NEMA 1 (OR BETTER) FOR INTERIOR LOCATIONS AND NEMA 3R (OR BETTER) FOR EXTERIOR LOCATIONS.
- METAL RECEPTACLE, SWITCH AND DEVICE BOXES SHALL BE GALVANIZED, EPOXY-COATED OR NON-CORRODING; SHALL MEET OR EXCEED UL 514A AND NEMA OS 1 AND BE RATED NEMA 1 (OR BETTER) FOR INTERIOR LOCATIONS AND WEATHER PROTECTED (WP OR BETTER) FOR EXTERIOR LOCATIONS.
- NONMETALLIC RECEPTACLE, SWITCH AND DEVICE BOXES SHALL MEET OR EXCEED NEMA OS 2 (NEWEST REVISION) AND BE RATED NEMA 1 (OR BETTER) FOR INTERIOR LOCATIONS AND WEATHER PROTECTED (WP OR BETTER) FOR EXTERIOR LOCATIONS.
- THE CONTRACTOR SHALL NOTIFY AND OBTAIN NECESSARY AUTHORIZATION FROM THE CARRIER AND/OR CROWN CASTLE USA INC. BEFORE COMMENCING WORK ON THE AC POWER DISTRIBUTION PANELS.
- THE CONTRACTOR SHALL PROVIDE NECESSARY TAGGING ON THE BREAKERS, CABLES AND DISTRIBUTION PANELS IN ACCORDANCE WITH THE APPLICABLE CODES AND STANDARDS TO SAFEGUARD LIFE AND PROPERTY.
- INSTALL LAMICOID LABEL ON THE METER CENTER TO SHOW "VERIZON".
- ALL EMPTY/SPARE CONDUITS THAT ARE INSTALLED ARE TO HAVE A METERED MULE TAPE PULL CORD INSTALLED.

| CONDUCTOR COLOR CODE | | |
|----------------------|-----------|------------------|
| SYSTEM | CONDUCTOR | COLOR |
| 120/240V, 1Ø | A PHASE | BLACK |
| | B PHASE | RED |
| | NEUTRAL | WHITE |
| | GROUND | GREEN |
| 120/208V, 3Ø | A PHASE | BLACK |
| | B PHASE | RED |
| | C PHASE | BLUE |
| | NEUTRAL | WHITE |
| 277/480V, 3Ø | GROUND | GREEN |
| | A PHASE | BROWN |
| | B PHASE | ORANGE OR PURPLE |
| | C PHASE | YELLOW |
| DC VOLTAGE | NEUTRAL | GREY |
| | GROUND | GREEN |
| | POS (+) | RED** |
| | NEG (-) | BLACK** |

APWA UNIFORM COLOR CODE:

- PROPOSED EXCAVATION
- TEMPORARY SURVEY MARKINGS
- ELECTRIC POWER LINES, CABLES, CONDUIT, AND LIGHTING CABLES
- GAS, OIL, STEAM, PETROLEUM, OR GASEOUS MATERIALS
- COMMUNICATION, ALARM OR SIGNAL LINES, CABLES, OR CONDUIT AND TRAFFIC LOOPS
- POTABLE WATER
- RECLAIMED WATER, IRRIGATION, AND SLURRY LINES
- SEWERS AND DRAIN LINES

GREENFIELD GROUNDING NOTES:

- ALL GROUND ELECTRODE SYSTEMS (INCLUDING TELECOMMUNICATION, RADIO, LIGHTNING PROTECTION AND AC POWER GES'S) SHALL BE BONDED TOGETHER AT OR BELOW GRADE, BY TWO OR MORE COPPER BONDING CONDUCTORS IN ACCORDANCE WITH THE NEC.
- THE CONTRACTOR SHALL PERFORM IEEE FALL-OF-POTENTIAL RESISTANCE TO EARTH TESTING (PER IEEE 1100 AND 81) FOR GROUND ELECTRODE SYSTEMS, THE CONTRACTOR SHALL FURNISH AND INSTALL SUPPLEMENTAL GROUND ELECTRODES AS NEEDED TO ACHIEVE A TEST RESULT OF 5 OHMS OR LESS.
- THE CONTRACTOR IS RESPONSIBLE FOR PROPERLY SEQUENCING GROUNDING AND UNDERGROUND CONDUIT INSTALLATION AS TO PREVENT ANY LOSS OF CONTINUITY IN THE GROUNDING SYSTEM OR DAMAGE TO THE CONDUIT AND PROVIDE TESTING RESULTS.
- METAL CONDUIT AND TRAY SHALL BE GROUNDED AND MADE ELECTRICALLY CONTINUOUS WITH LISTED BONDING FITTINGS OR BY BONDING ACROSS THE DISCONTINUITY WITH #6 COPPER WIRE UL APPROVED GROUNDING TYPE CONDUIT CLAMPS.
- METAL RACEWAY SHALL NOT BE USED AS THE NEC REQUIRED EQUIPMENT GROUND CONDUCTOR. STRANDED COPPER CONDUCTORS WITH GREEN INSULATION, SIZED IN ACCORDANCE WITH THE NEC, SHALL BE FURNISHED AND INSTALLED WITH THE POWER CIRCUITS TO BTS EQUIPMENT.
- EACH CABINET FRAME SHALL BE DIRECTLY CONNECTED TO THE MASTER GROUND BAR WITH GREEN INSULATED SUPPLEMENTAL EQUIPMENT GROUND WIRES, #6 STRANDED COPPER OR LARGER FOR INDOOR BTS; #2 BARE SOLID TINNED COPPER FOR OUTDOOR BTS.
- CONNECTIONS TO THE GROUND BUS SHALL NOT BE DOUBLED UP OR STACKED BACK TO BACK CONNECTIONS ON OPPOSITE SIDE OF THE GROUND BUS ARE PERMITTED.
- ALL EXTERIOR GROUND CONDUCTORS BETWEEN EQUIPMENT/GROUND BARS AND THE GROUND RING SHALL BE #2 SOLID TINNED COPPER UNLESS OTHERWISE INDICATED.
- ALUMINUM CONDUCTOR OR COPPER CLAD STEEL CONDUCTOR SHALL NOT BE USED FOR GROUNDING CONNECTIONS.
- USE OF 90° BENDS IN THE PROTECTION GROUNDING CONDUCTORS SHALL BE AVOIDED WHEN 45° BENDS CAN BE ADEQUATELY SUPPORTED.
- EXOTHERMIC WELDS SHALL BE USED FOR ALL GROUNDING CONNECTIONS BELOW GRADE.
- ALL GROUND CONNECTIONS ABOVE GRADE (INTERIOR AND EXTERIOR) SHALL BE FORMED USING HIGH PRESS CRIMPS.
- COMPRESSION GROUND CONNECTIONS MAY BE REPLACED BY EXOTHERMIC WELD CONNECTIONS.
- ICE BRIDGE BONDING CONDUCTORS SHALL BE EXOTHERMICALLY BONDED OR BOLTED TO THE BRIDGE AND THE TOWER GROUND BAR.
- APPROVED ANTIOXIDANT COATINGS (I.E. CONDUCTIVE GEL OR PASTE) SHALL BE USED ON ALL COMPRESSION AND BOLTED GROUND CONNECTIONS.
- ALL EXTERIOR GROUND CONNECTIONS SHALL BE COATED WITH A CORROSION RESISTANT MATERIAL.
- MISCELLANEOUS ELECTRICAL AND NON-ELECTRICAL METAL BOXES, FRAMES AND SUPPORTS SHALL BE BONDED TO THE GROUND RING, IN ACCORDANCE WITH THE NEC.
- BOND ALL METALLIC OBJECTS WITHIN 6 ft. OF MAIN GROUND RING WITH (1) #2 BARE SOLID TINNED COPPER GROUND CONDUCTOR.
- GROUND CONDUCTORS USED FOR THE FACILITY GROUNDING AND LIGHTNING PROTECTION SYSTEMS SHALL NOT BE ROUTED THROUGH METALLIC OBJECTS THAT FORM A RING AROUND THE CONDUCTOR, SUCH AS METALLIC CONDUITS, METAL SUPPORT CLIPS OR SLEEVES THROUGH WALLS OR FLOORS. WHEN IT IS REQUIRED TO BE HOUSED IN CONDUIT TO MEET CODE REQUIREMENTS OR LOCAL CONDITIONS, NON-METALLIC MATERIAL SUCH AS PVC CONDUIT SHALL BE USED. WHERE USE OF METAL CONDUIT IS UNAVOIDABLE (I.E., NONMETALLIC CONDUIT PROHIBITED BY LOCAL CODE) THE GROUND CONDUCTOR SHALL BE BONDED TO EACH END OF THE METAL CONDUIT.
- ALL GROUNDS THAT TRANSITION FROM BELOW GRADE TO ABOVE GRADE MUST BE #2 BARE SOLID TINNED COPPER IN 3/4" NON-METALLIC, FLEXIBLE CONDUIT FROM 24" BELOW GRADE TO WITHIN 3" TO 6" OF CAD-WELD TERMINATION POINT. THE EXPOSED END OF THE CONDUIT MUST BE SEALED WITH SILICONE CAULK. (ADD TRANSITIONING GROUND STANDARD DETAIL AS WELL).
- BUILDINGS WHERE THE MAIN GROUNDING CONDUCTORS ARE REQUIRED TO BE ROUTED TO GRADE, THE CONTRACTOR SHALL ROUTE TWO GROUNDING CONDUCTORS FROM THE ROOFTOP, TOWERS, AND WATER TOWERS GROUNDING RING, TO THE EXISTING GROUNDING SYSTEM. THE GROUNDING CONDUCTORS SHALL NOT BE SMALLER THAN 2/O COPPER. ROOFTOP GROUNDING RING SHALL BE BONDED TO THE EXISTING GROUNDING SYSTEM, THE BUILDING STEEL COLUMNS, LIGHTNING PROTECTION SYSTEM, AND BUILDING MAIN WATER LINE (FERROUS OR NONFERROUS METAL PIPING ONLY).

ABBREVIATIONS:

- ANT ANTENNA
- (E) EXISTING
- FIF FACILITY INTERFACE FRAME
- GEN GENERATOR
- GPS GLOBAL POSITIONING SYSTEM
- GSM GLOBAL SYSTEM FOR MOBILE
- LTE LONG TERM EVOLUTION
- MGB MASTER GROUND BAR
- MW MICROWAVE
- (N) NEW
- NEC NATIONAL ELECTRIC CODE
- (P) PROPOSED
- PP POWER PLANT
- QTY QUANTITY
- RECT RECTIFIER
- RBS RADIO BASE STATION
- RETS REMOTE ELECTRIC TILT
- RDFS RADIO FREQUENCY DATA SHEET
- RRH REMOTE RADIO HEAD
- RRU REMOTE RADIO UNIT
- SIAD SMART INTEGRATED DEVICE
- TMA TOWER MOUNTED AMPLIFIER
- TYP TYPICAL
- UMTS UNIVERSAL MOBILE TELECOMMUNICATIONS SYSTEM
- W.P. WORK POINT

verizon
180 WASHINGTON VALLEY ROAD
BEDMINSTER, NJ 07921

CROWN CASTLE
1500 CORPORATE DRIVE
CANONSBURG, PA 15317

INFINIGY
FROM ZERO TO INFINIGY
the solutions are endless
BELLEVUE, WA 98004


VERIZON SITE NUMBER:
468396
BU #: **873645**
OXFORD
691 OXFORD ROAD
OXFORD, CT 06478
EXISTING 150'-0" MONOPOLE

ISSUED FOR:

| REV | DATE | DRWN | DESCRIPTION | DES./QA |
|-----|------------|------|-------------|---------|
| 0 | 06/03/2021 | RCD | FINAL CDs | -- |
| 1 | 07/01/2021 | PEG | FINAL CDs | -- |
| | | | | |
| | | | | |

STATE OF CONNECTICUT
HUHEI SAKANOE
34916
PROFESSIONAL ENGINEER
7/1/2021
IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SHEET NUMBER: **T-2** REVISION: **1**

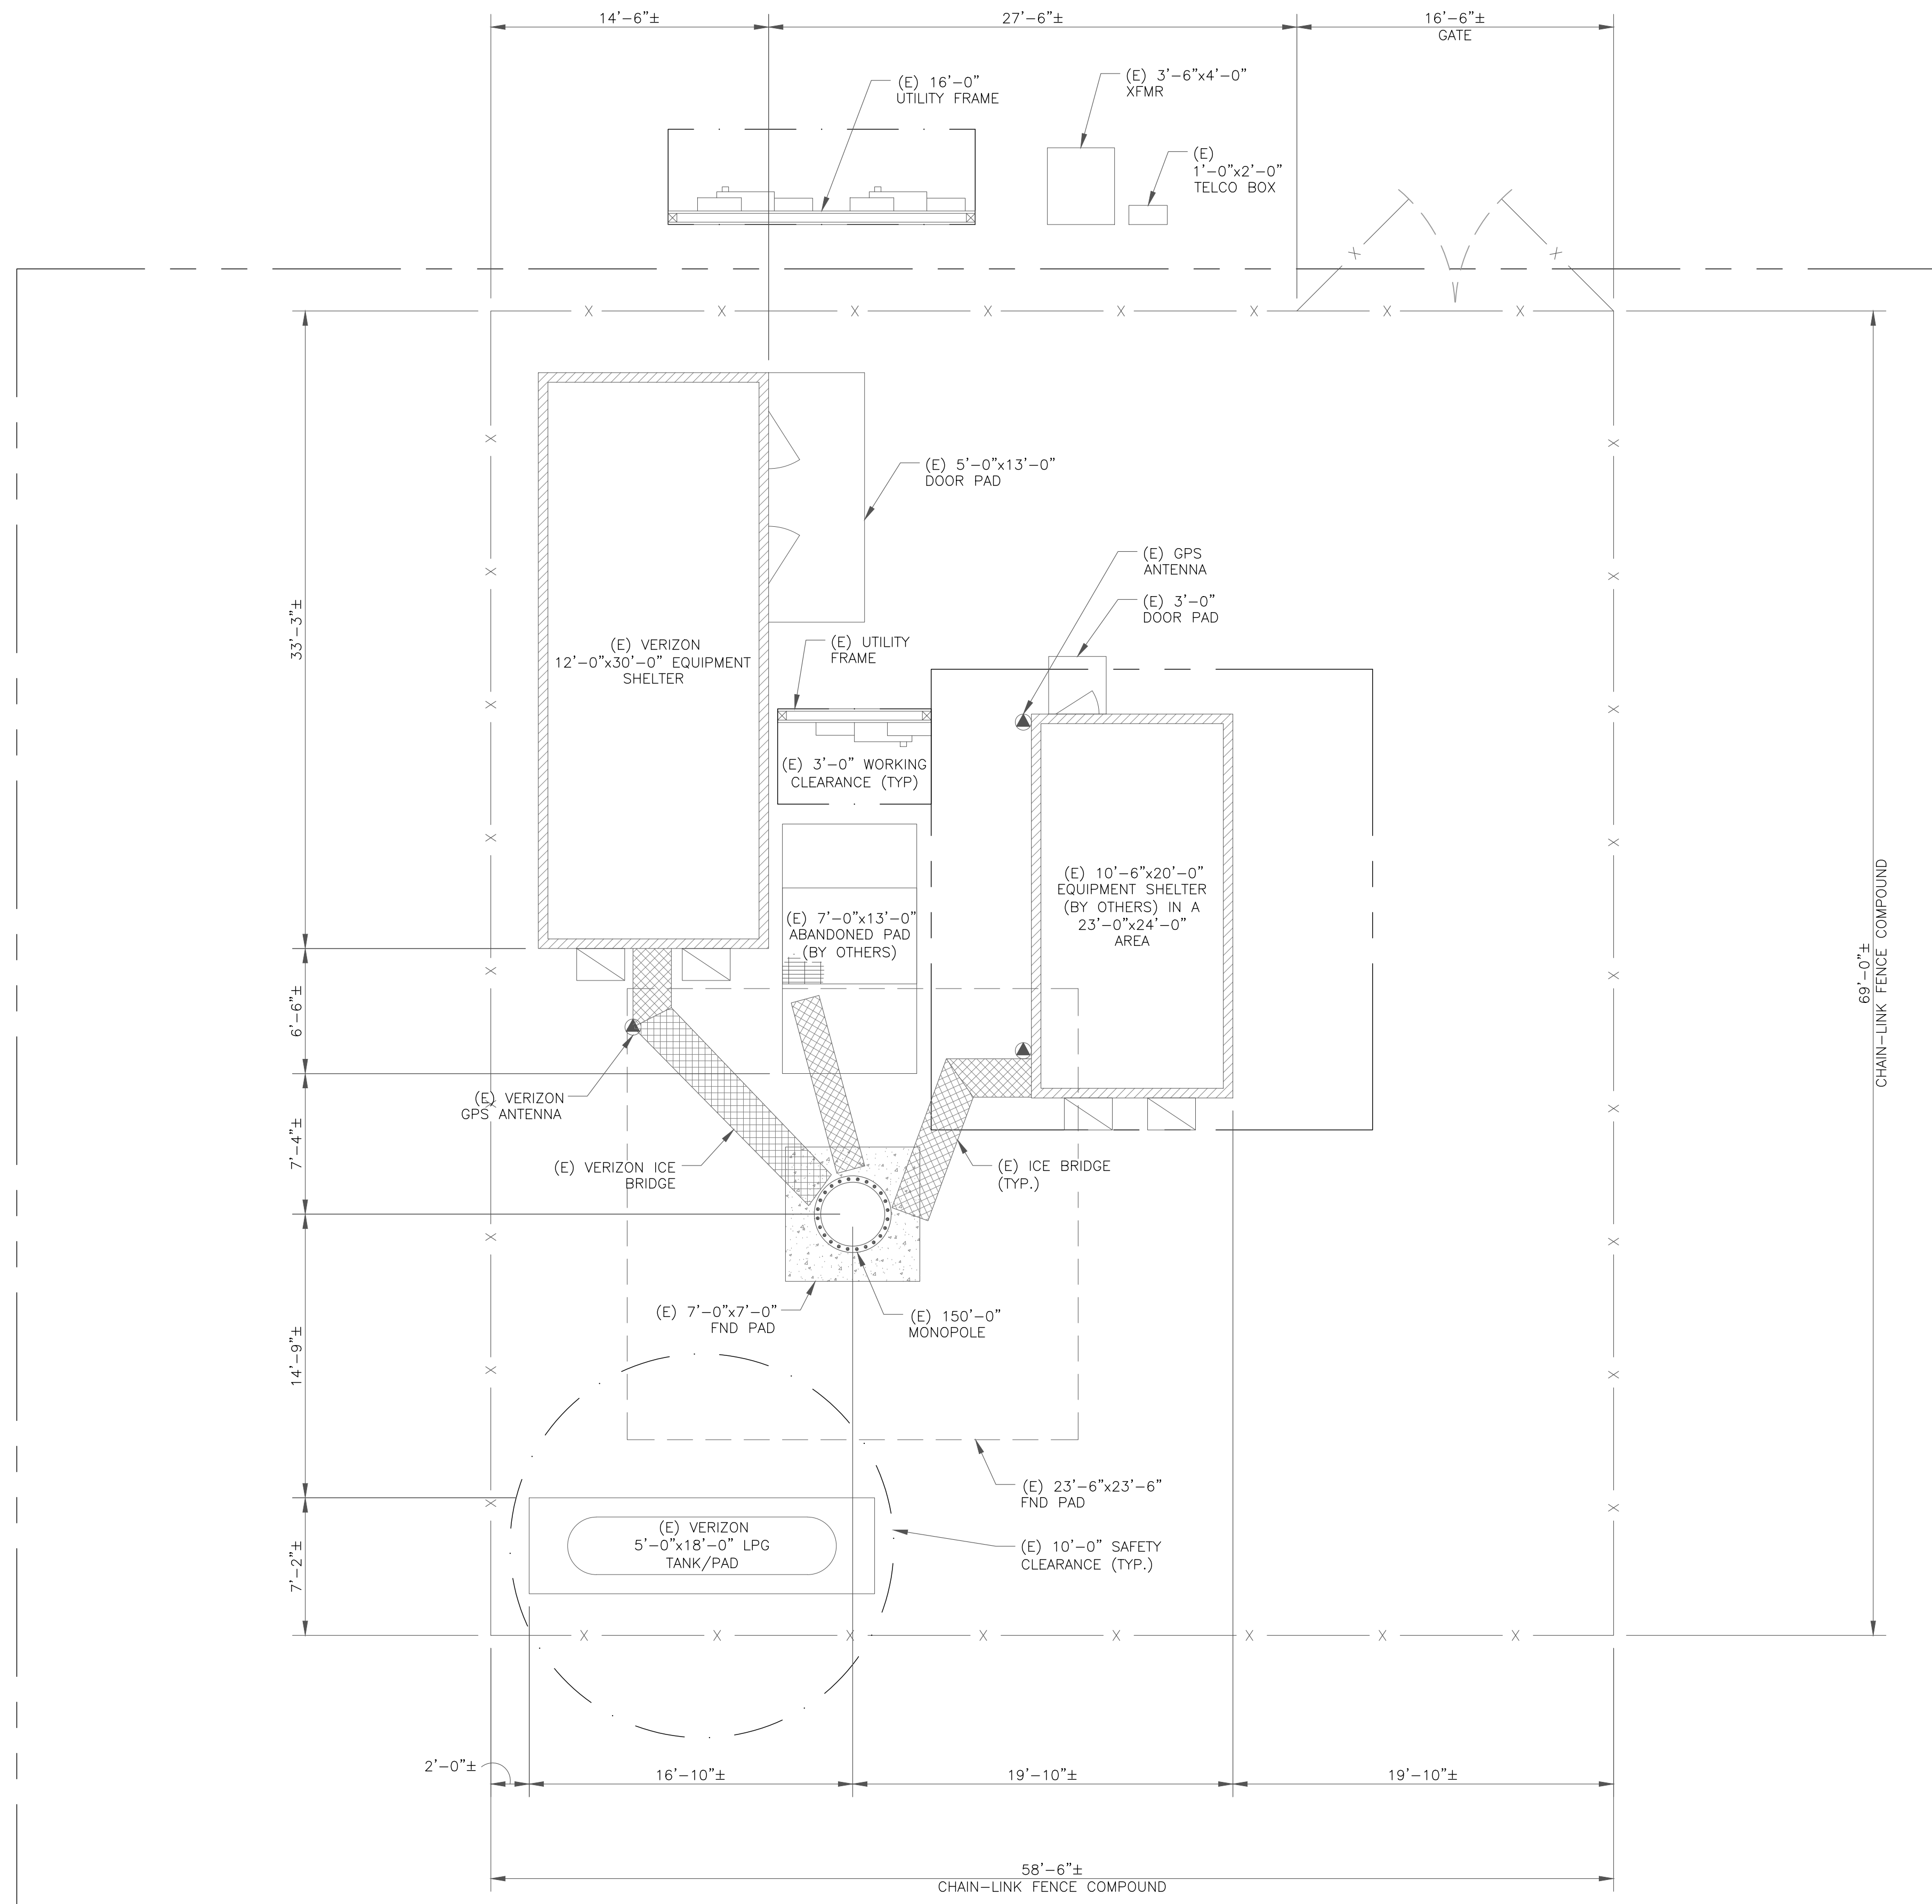

1 SITE PLAN
 SCALE: 3/8"=1'-0" (FULL SIZE)
 3/16"=1'-0" (11x17)

verizon

180 WASHINGTON VALLEY ROAD
 BEDMINSTER, NJ 07921

CROWN CASTLE

1500 CORPORATE DRIVE
 CANONSBURG, PA 15317

INFINIGY

FROM ZERO TO INFINIGY
 the solutions are endless

BELLEVUE, WA 98004

VERIZON SITE NUMBER:
 468396


BU #: 873645
 OXFORD

691 OXFORD ROAD
 OXFORD, CT 06478

EXISTING 150'-0" MONOPOLE

ISSUED FOR:

| REV | DATE | DRWN | DESCRIPTION | DES./QA |
|-----|------------|------|-------------|---------|
| 0 | 06/03/2021 | RCD | FINAL CDs | -- |
| 1 | 07/01/2021 | PEG | FINAL CDs | -- |

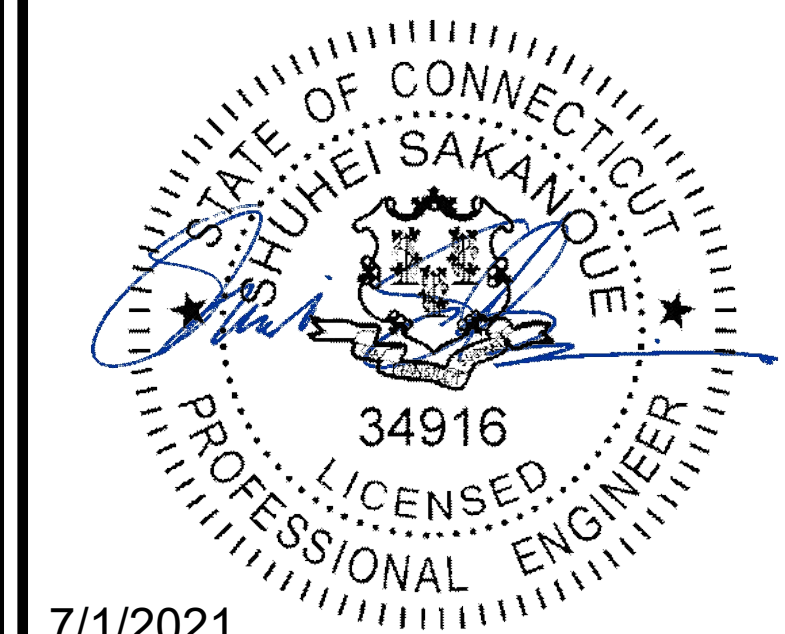

7/11/2021

IT IS A VIOLATION OF LAW FOR ANY PERSON,
 UNLESS THEY ARE ACTING UNDER THE DIRECTION
 OF A LICENSED PROFESSIONAL ENGINEER,
 TO ALTER THIS DOCUMENT.

SHEET NUMBER:
C-1

REVISION:
1

NEW ANTENNA
SAMSUNG - VZS01
(3 TOTAL, 1 PER SECTOR)

(E) VERIZON EQUIPMENT TO REMAIN
(6) ANDREW - JAHH-65B-R3B ANTENNAS
(6) ANTEL - LPA-80063/6CF ANTENNAS
(1) RAYCAP - RXXDC-3315-PF-48 OVP
INSTALLED ON EXISTING MOUNTS

NEW RRH SAMSUNG - B2/B66A
RRH-BR049 (RFV01U-D1A)
(3 TOTAL, 1 PER SECTOR)

NEW RRH SAMSUNG - B5/B13
RRH-BR04C (RFV01U-D2A)
(3 TOTAL, 1 PER SECTOR)

NEW DIPLEXER
COMMSCOPE - CBC78-T-DS-43
(3 TOTAL, 1 PER SECTOR)

VERIZON EQUIPMENT

ANTENNA CL: 147'-0"
MOUNT CL: 147'-0"

NOTES:

- ELEVATION BASED ON DRAWING PROVIDED BY TOWER OWNER. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND LOCATION/ORIENTATION OF EXISTING EQUIPMENT.
- INFINIGY HAS NOT EVALUATED THE TOWER STRUCTURE AND ASSUMES NO RESPONSIBILITY FOR THEIR STRUCTURAL INTEGRITY REGARDING PROPOSED LOADINGS. FINAL INSTALLATION SHALL COMPLY WITH RESULTS OF PASSING STRUCTURAL ANALYSES PERFORMED BY OTHERS.
- FOR ADDITIONAL INFORMATION PERTAINING TO THE ANTENNA MOUNTS, SEE 'ANTENNA MOUNT ANALYSIS REPORT AND PMI REQUIREMENTS' AND MODIFICATION DESIGN DRAWINGS COMPLETED BY MASER CO, DATED 5/07/21


TIP OF (E) ANTENNA
ELEV. = 150'-0"

TIP OF MONOPOLE
ELEV. = 150'-0"


TIP OF (N) ANTENNA
ELEV. = 148'-6"

CENTERLINE OF (E) & (N) ANTENNA
ELEV. = 147'-0"


CENTERLINE OF ANTENNA MOUNT BY OTHERS
ELEV. = 139'-0"

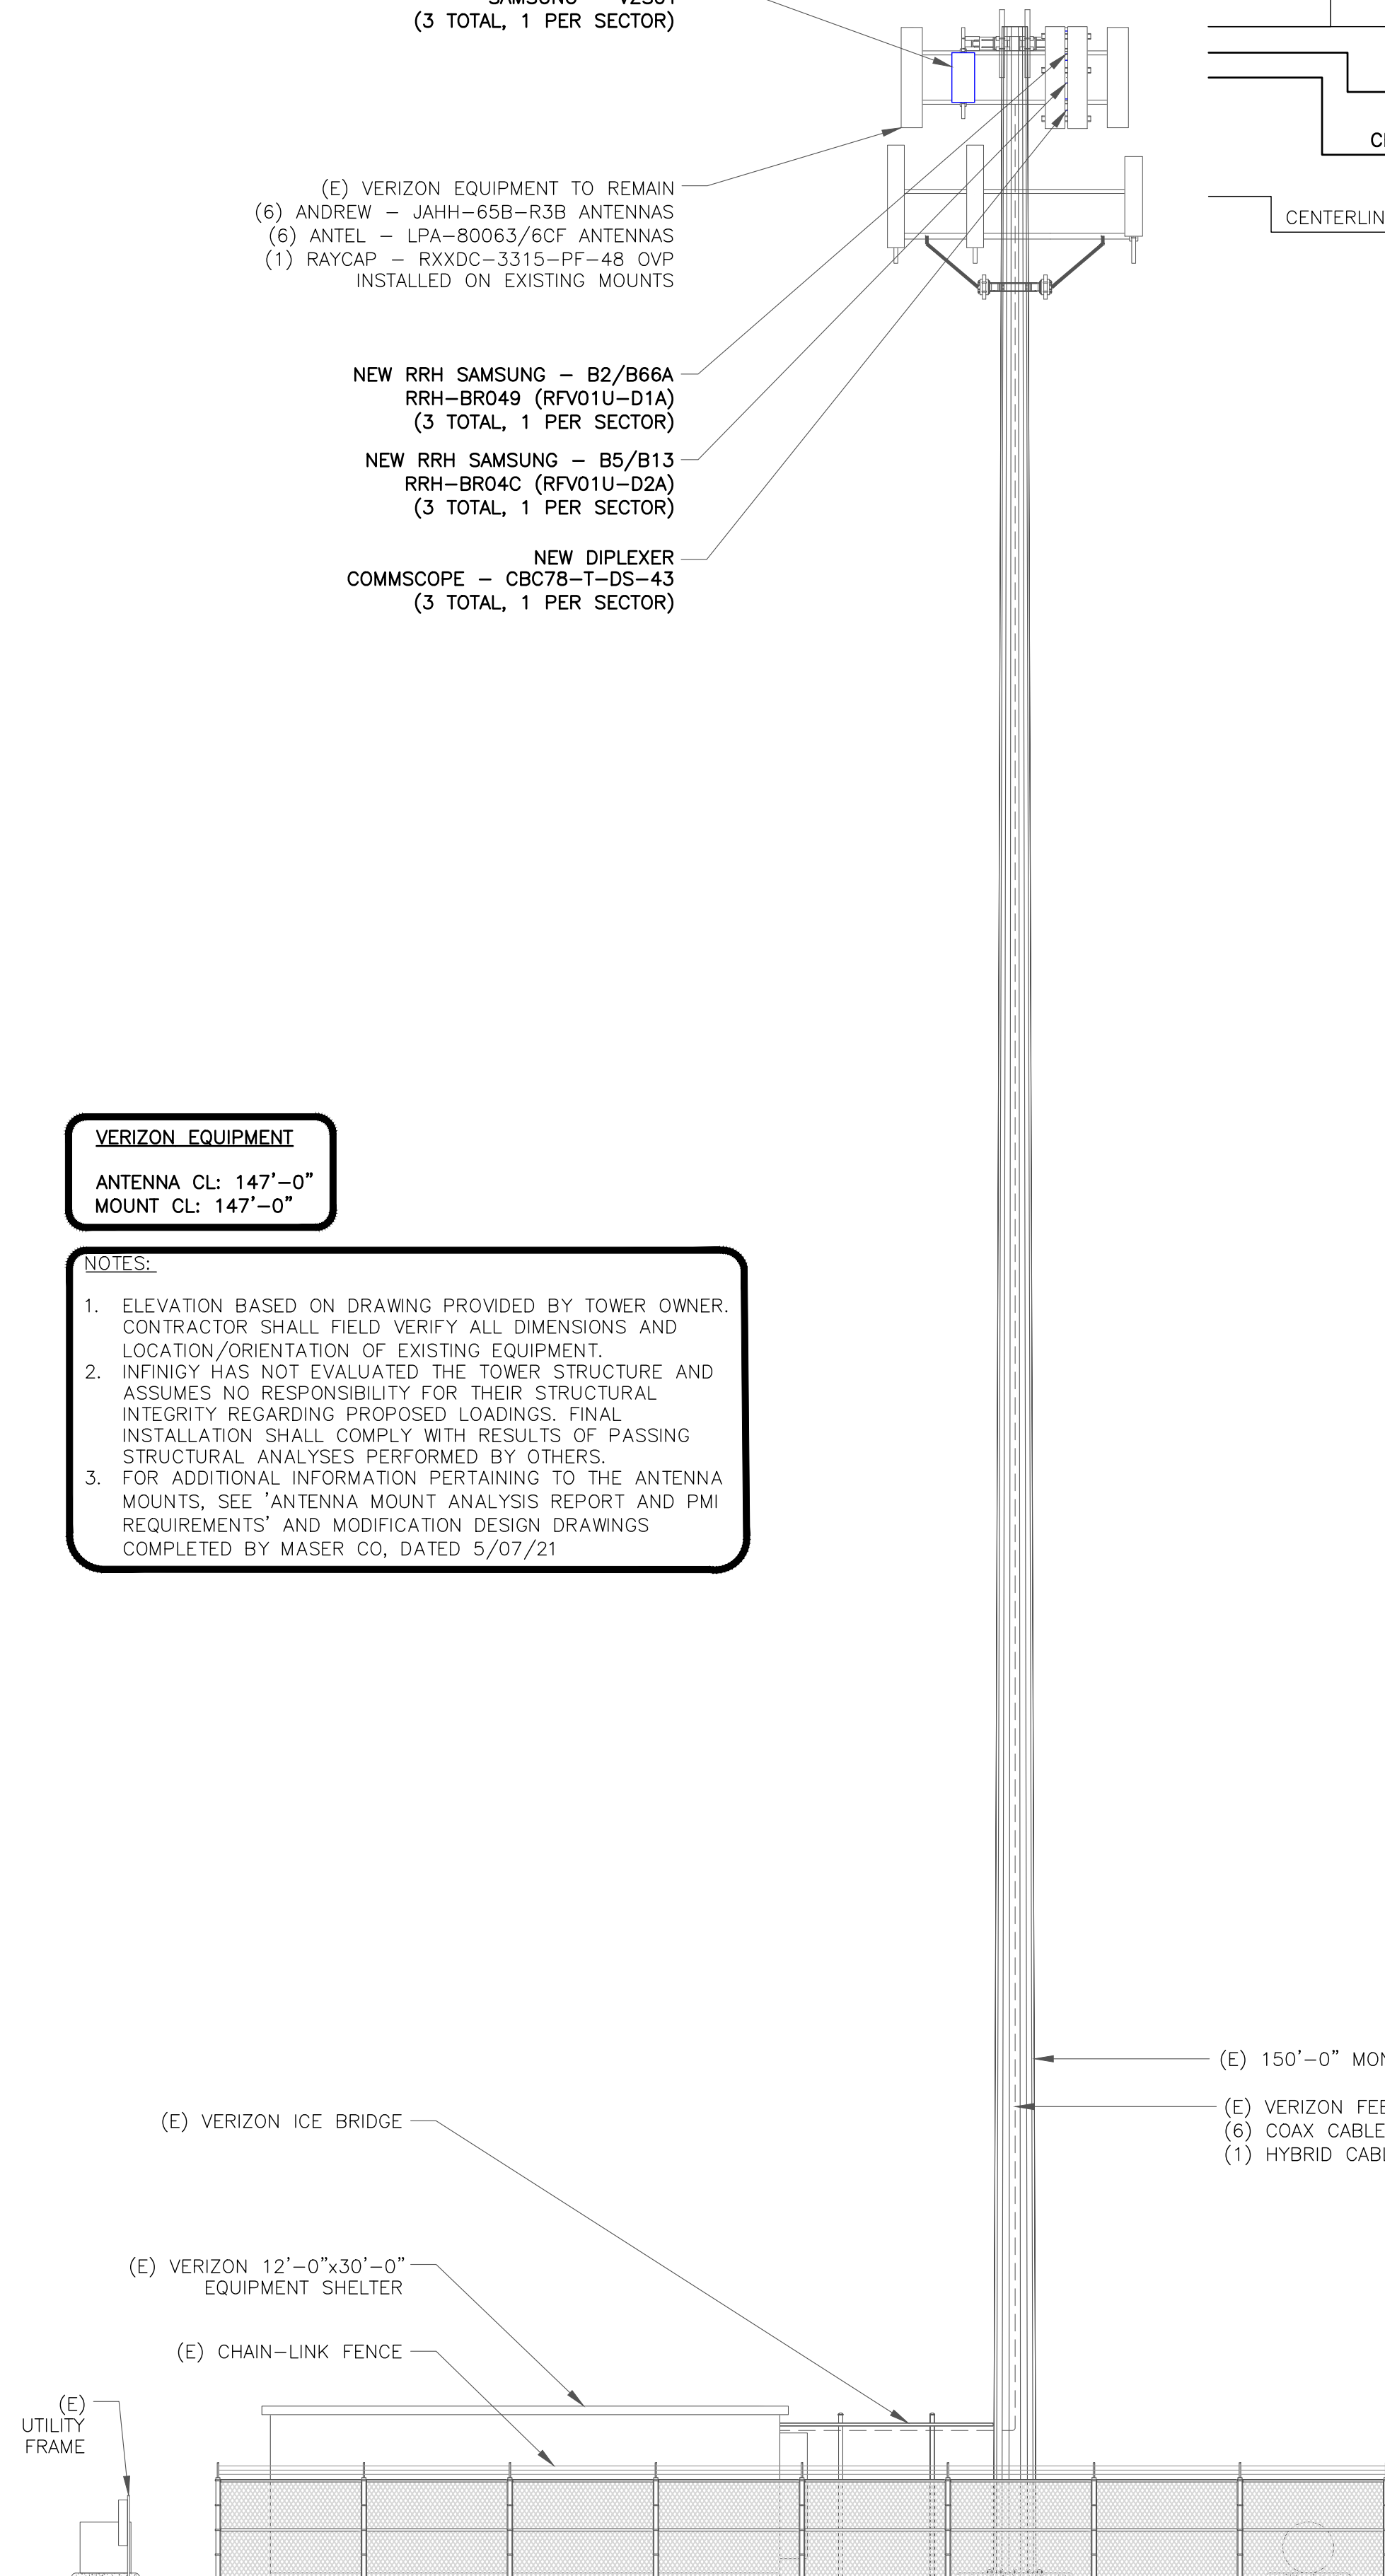

1 TOWER ELEVATION
SCALE: NOT TO SCALE

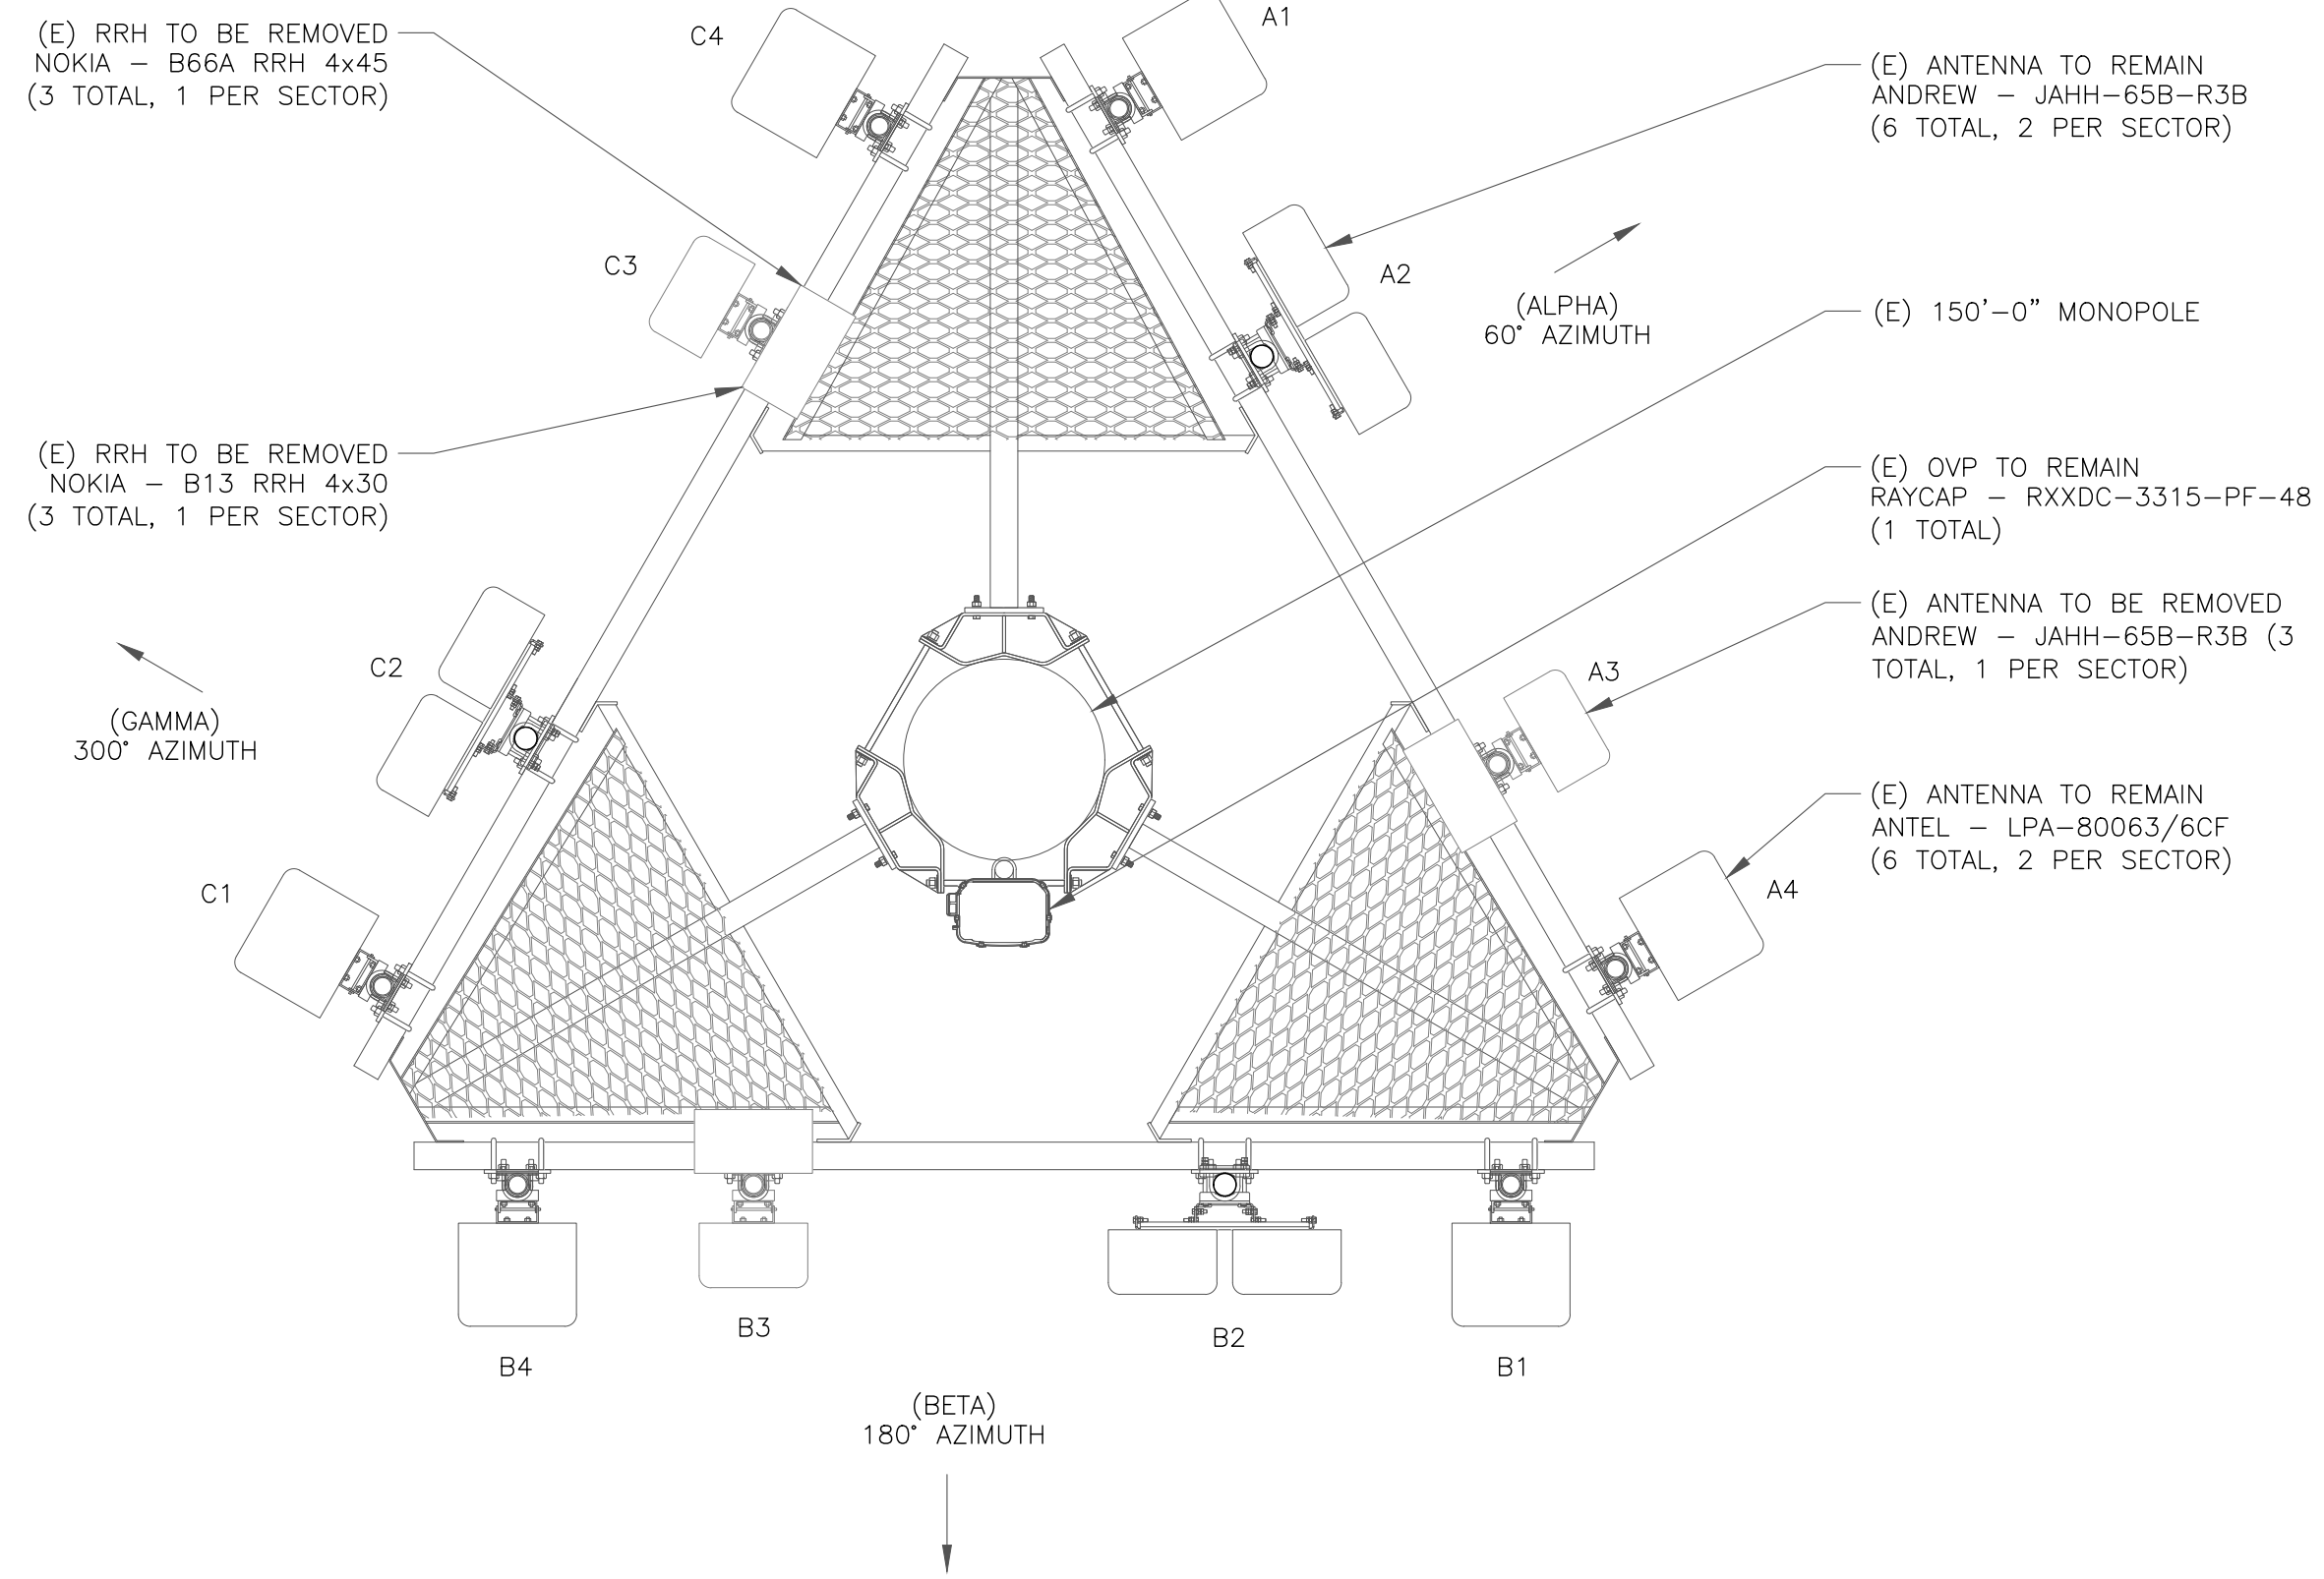

2 EXISTING ANTENNA PLAN
SCALE: NOT TO SCALE

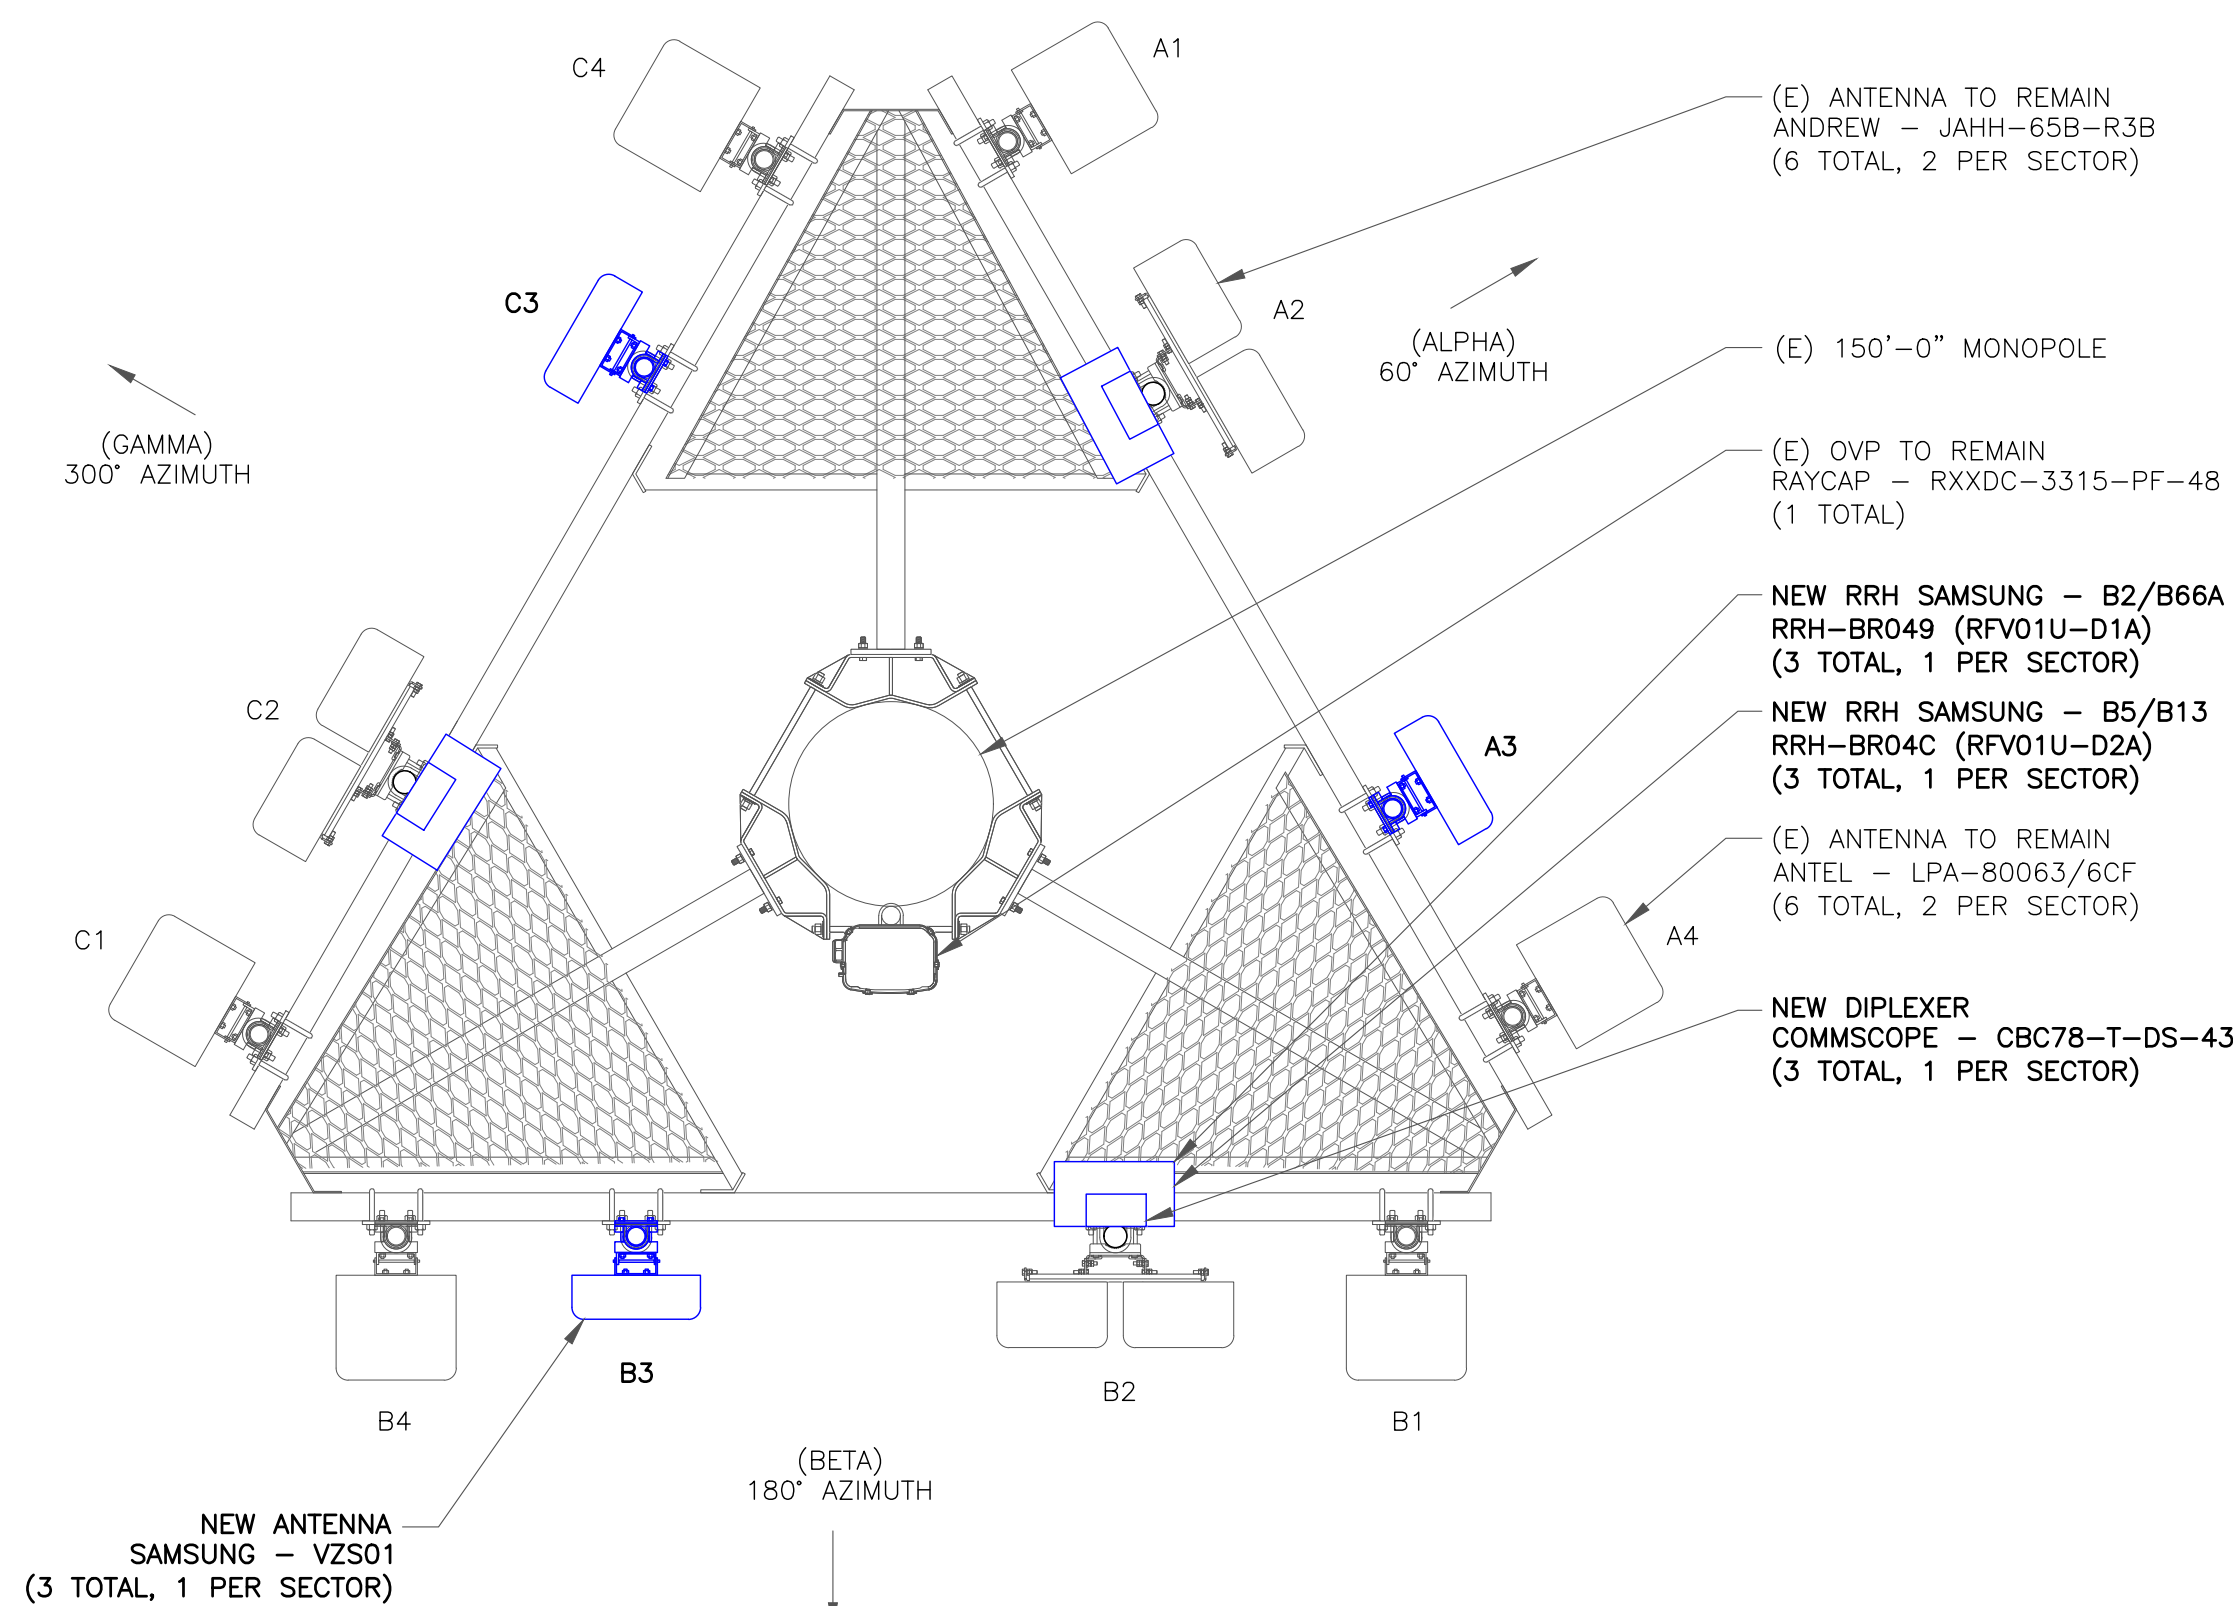

3 NEW ANTENNA PLAN
SCALE: NOT TO SCALE

verizon

180 WASHINGTON VALLEY ROAD
BEDMINSTER, NJ 07921

CROWN CASTLE

1500 CORPORATE DRIVE
CANONSBURG, PA 15317

INFINIGY

FROM ZERO TO INFINIGY
the solutions are endless

BELLEVUE, WA 98004

VERIZON SITE NUMBER:
468396


BU #: 873645
OXFORD

691 OXFORD ROAD
OXFORD, CT 06478

EXISTING 150'-0" MONOPOLE

ISSUED FOR:

| REV | DATE | DRWN | DESCRIPTION | DES./QA |
|-----|------------|------|-------------|---------|
| 0 | 06/03/2021 | RCD | FINAL CDs | -- |
| 1 | 07/01/2021 | PEG | FINAL CDs | -- |

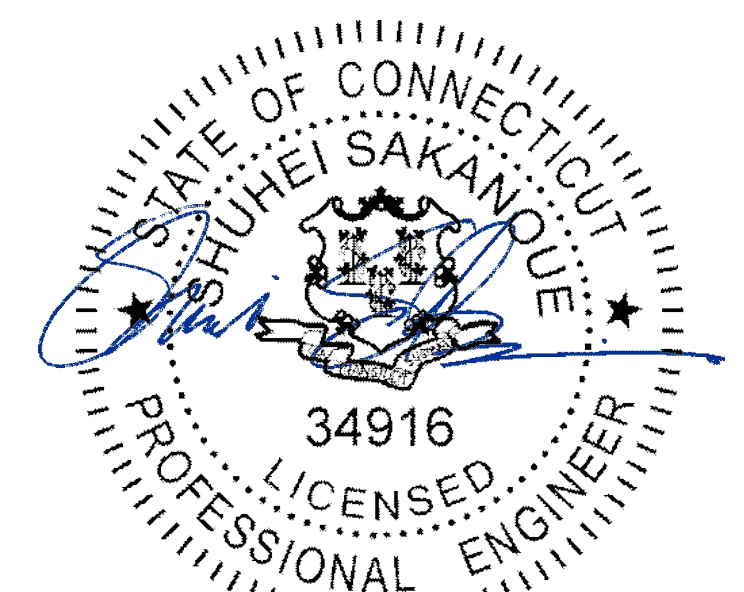

7/1/2021

IT IS A VIOLATION OF LAW FOR ANY PERSON,
UNLESS THEY ARE ACTING UNDER THE DIRECTION
OF A LICENSED PROFESSIONAL ENGINEER,
TO ALTER THIS DOCUMENT.

SHEET NUMBER:

C-2

REVISION:

1

ANTENNA/RRH SCHEDULE

| SECTOR | STATUS | ANTENNA MANUFACTURER | ANTENNA MODEL | ANTENNA CENTERLINE | AZIMUTH | MECHANICAL DOWNTILTS | ELECTRICAL DOWNTILTS | TOWER EQUIPMENT MANUFACTURER | TOWER EQUIPMENT QTY/MODEL |
|--------|----------|----------------------|------------------|--------------------|---------|----------------------|----------------------|------------------------------|---|
| A1 | EXISTING | ANTEL | LPA-80063/6CF | 147'-0" | 60° | 2' | 0' | - | - |
| A2 | EXISTING | ANDREW | (2) JAHH-65B-R3B | 147'-0" | 60° | 0' | 2'/2'/2'/2' | SAMSUNG/COMMSCOPE | (1)B2/B66A RRH-BR049 (RFV01U-D1A) (1) B5/B13 RRH-BR04C (RFV01U-D2A) (1) CBC78-T-DS-43 |
| A3 | NEW | SAMSUNG | MT6407-77A | 147'-0" | 60° | 0' | 6' | - | - |
| A4 | EXISTING | ANTEL | LPA-80063/6CF | 147'-0" | 60° | 2' | 0' | - | - |
| | | | | | | | | | |
| B1 | EXISTING | ANTEL | LPA-80063/6CF | 147'-0" | 180° | 4' | 0' | - | - |
| B2 | EXISTING | ANDREW | (2) JAHH-65B-R3B | 147'-0" | 180° | 0' | 4'/4'/4'/4' | SAMSUNG/COMMSCOPE | (1)B2/B66A RRH-BR049 (RFV01U-D1A) (1) B5/B13 RRH-BR04C (RFV01U-D2A) (1) CBC78-T-DS-43 |
| B3 | NEW | SAMSUNG | MT6407-77A | 147'-0" | 180° | 0' | 6' | - | - |
| B4 | EXISTING | ANTEL | LPA-80063/6CF | 147'-0" | 180° | 4' | 0' | - | - |
| | | | | | | | | | |
| C1 | EXISTING | ANTEL | LPA-80063/6CF | 147'-0" | 300° | 0' | 0' | - | - |
| C2 | EXISTING | ANDREW | (2) JAHH-65B-R3B | 147'-0" | 300° | 0' | 4'/4'/4'/4' | SAMSUNG/COMMSCOPE | (1)B2/B66A RRH-BR049 (RFV01U-D1A) (1) B5/B13 RRH-BR04C (RFV01U-D2A) (1) CBC78-T-DS-43 |
| C3 | NEW | SAMSUNG | MT6407-77A | 147'-0" | 300° | 0' | 6' | - | - |
| C4 | EXISTING | ANTEL | LPA-80063/6CF | 147'-0" | 300° | 0' | 0' | - | - |

CABLE SCHEDULE

| STATUS | CABLE TYPE | SIZE | LENGTH | QTY |
|------------------|------------|--------|----------|-----|
| EXISTING | COAX | 1-5/8" | 197'-0"± | 6 |
| EXISTING | HYBRID | 1-5/8" | 197'-0"± | 1 |
| TOTAL CABLE QTY: | | | | 7 |



VERIZON SITE NUMBER:
468396


BU #: **873645**
OXFORD

691 OXFORD ROAD
OXFORD, CT 06478

EXISTING 150'-0" MONOPOLE


ISSUED FOR:

| REV | DATE | DRWN | DESCRIPTION | DES./QA |
|-----|------------|------|-------------|---------|
| 0 | 06/03/2021 | RCD | FINAL CDs | -- |
| 1 | 07/01/2021 | PEG | FINAL CDs | -- |

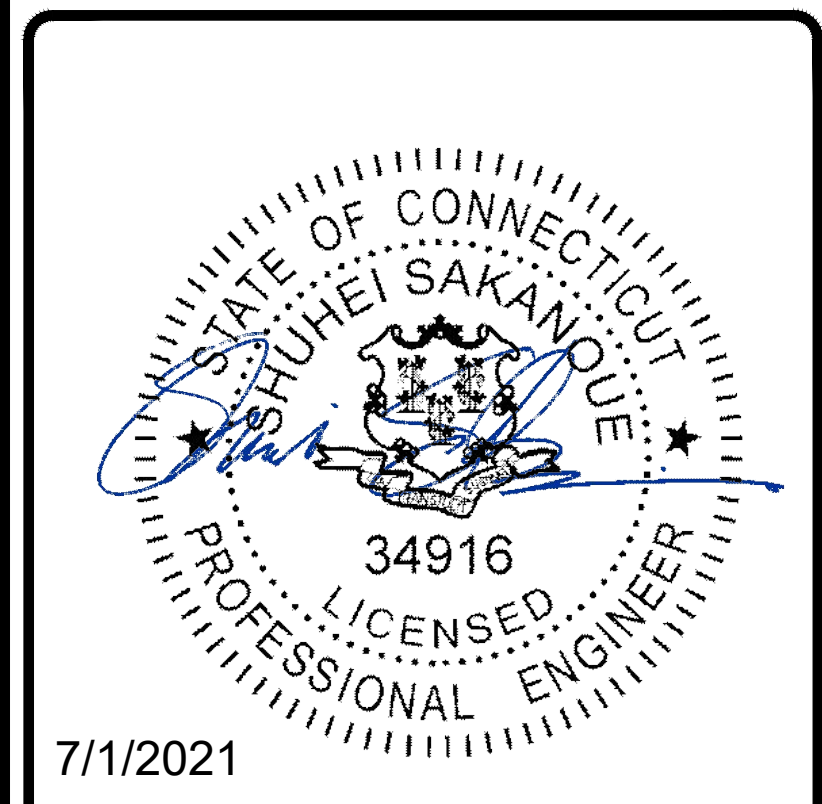


IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SHEET NUMBER: **C-3** REVISION: **1**

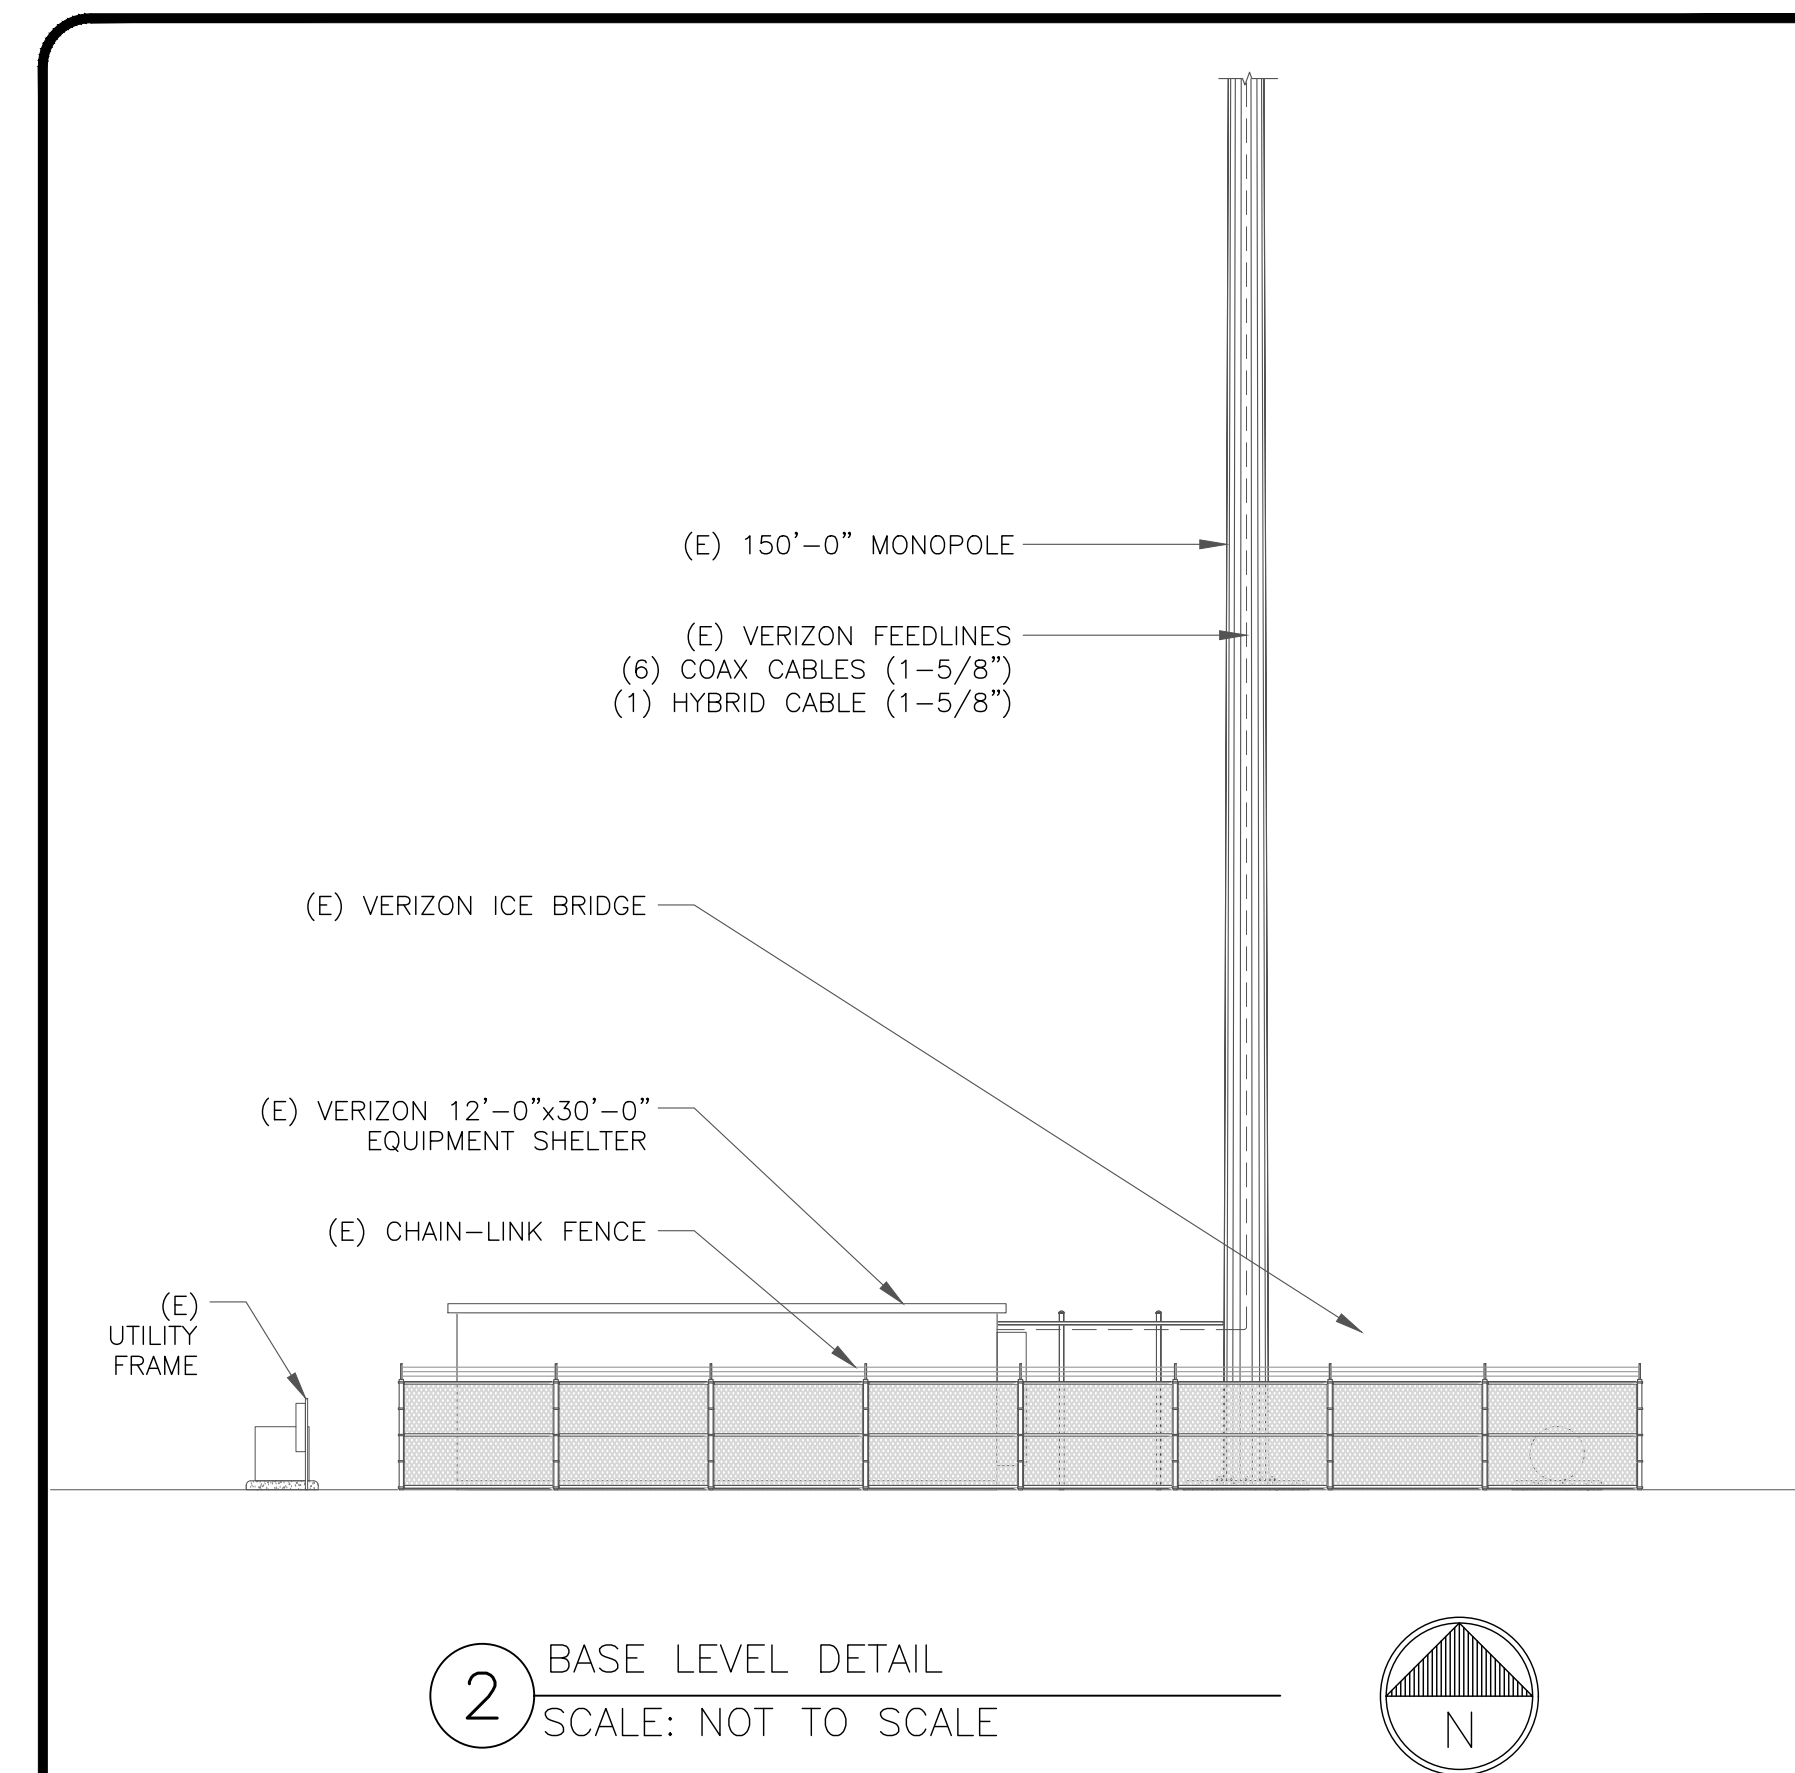

1 VERIZON TOWER EQUIPMENT SCHEDULE
SCALE: NOT TO SCALE

2 BASE LEVEL DETAIL
SCALE: NOT TO SCALE

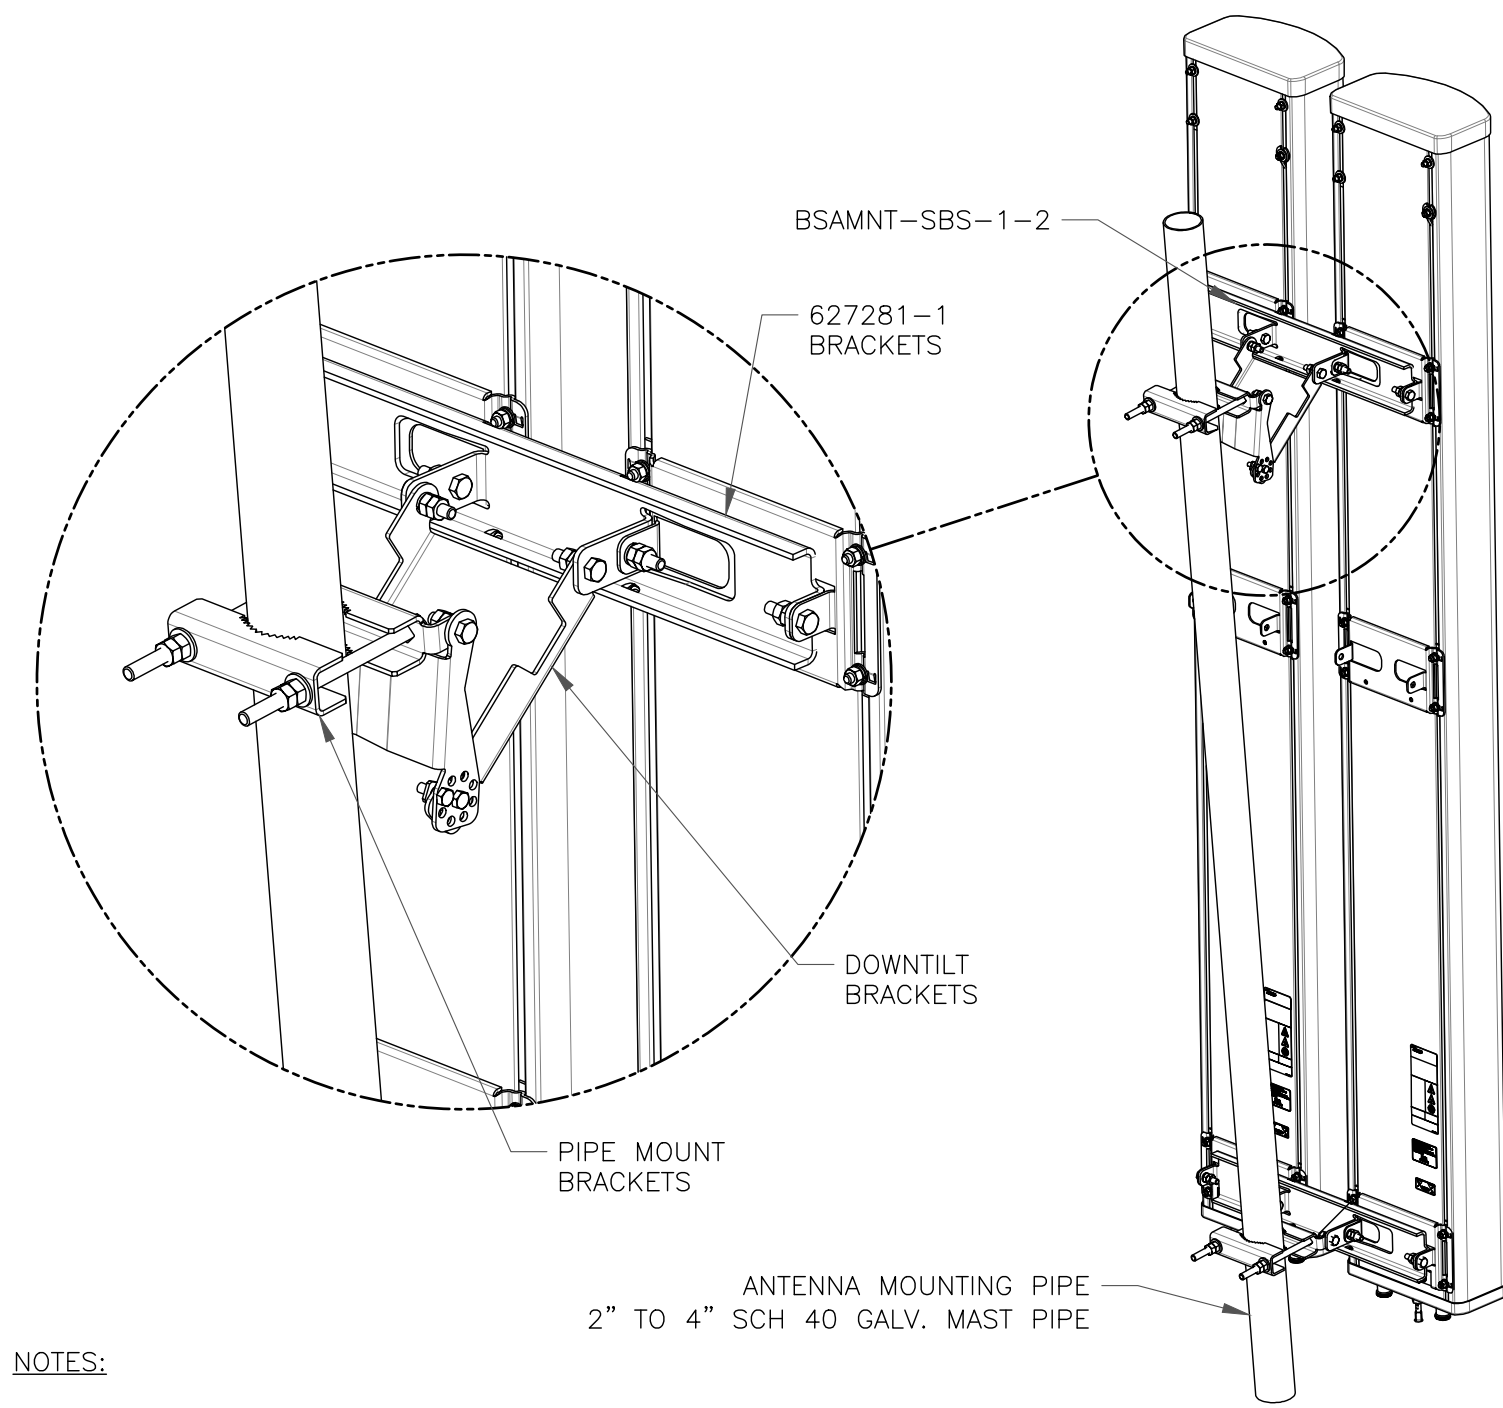


NOTES:


- BSAMNT-SBS-1-2 KIT CONTAINS (2) 627281 MOUNTING BRACKETS.
- TORQUE THE M10 BOLT ASSEMBLY TO 37 N.m. PER MANUFACTURE'S RECOMMENDATIONS.

1 COMMSCOPE - BSAMNT-SBS-1-2
SCALE: NOT TO SCALE

2 NOT USED
SCALE: NOT TO SCALE

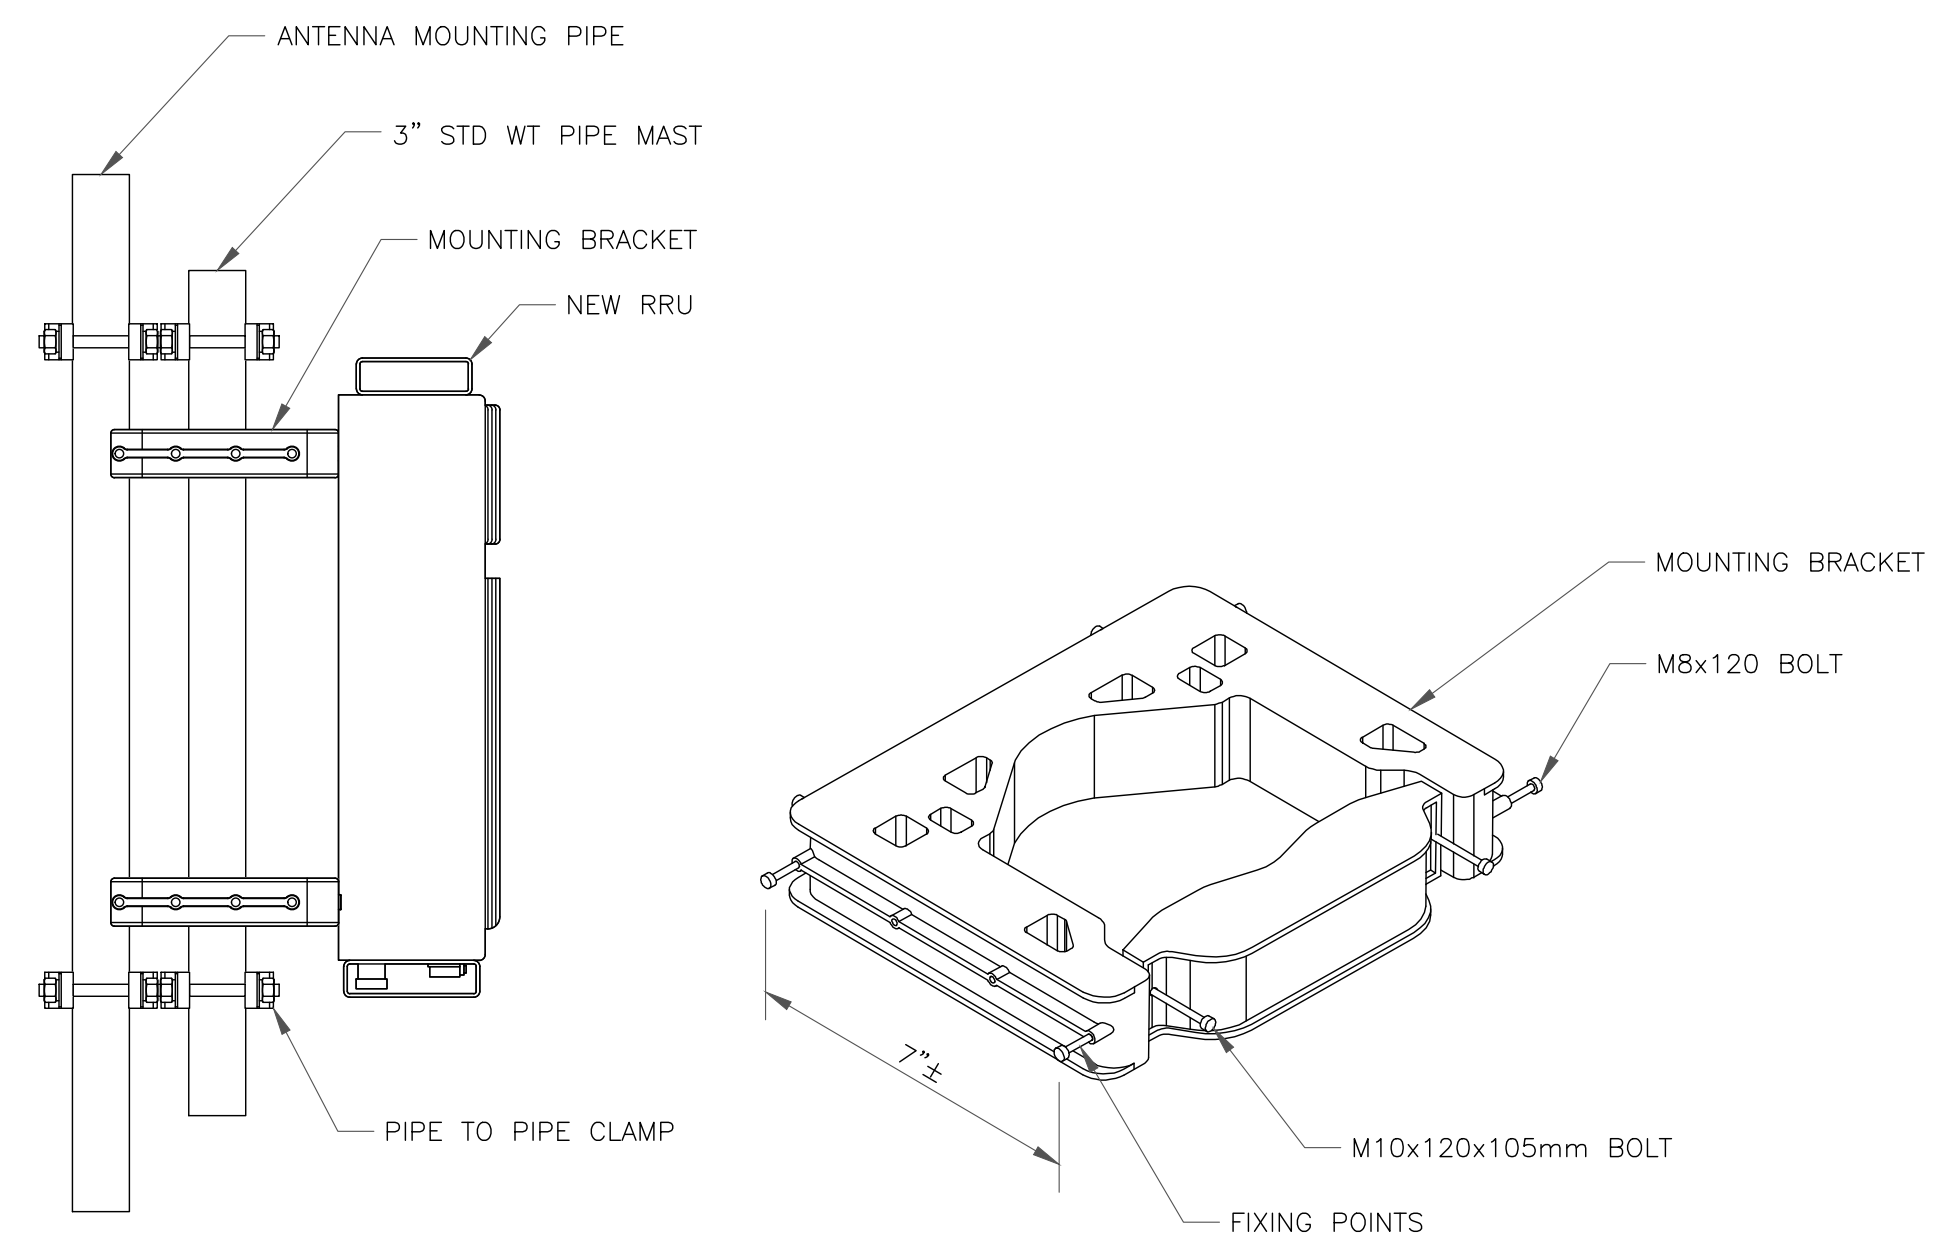

3 NOKIA - FPKA BRACKET MOUNTING DETAIL
SCALE: NOT TO SCALE

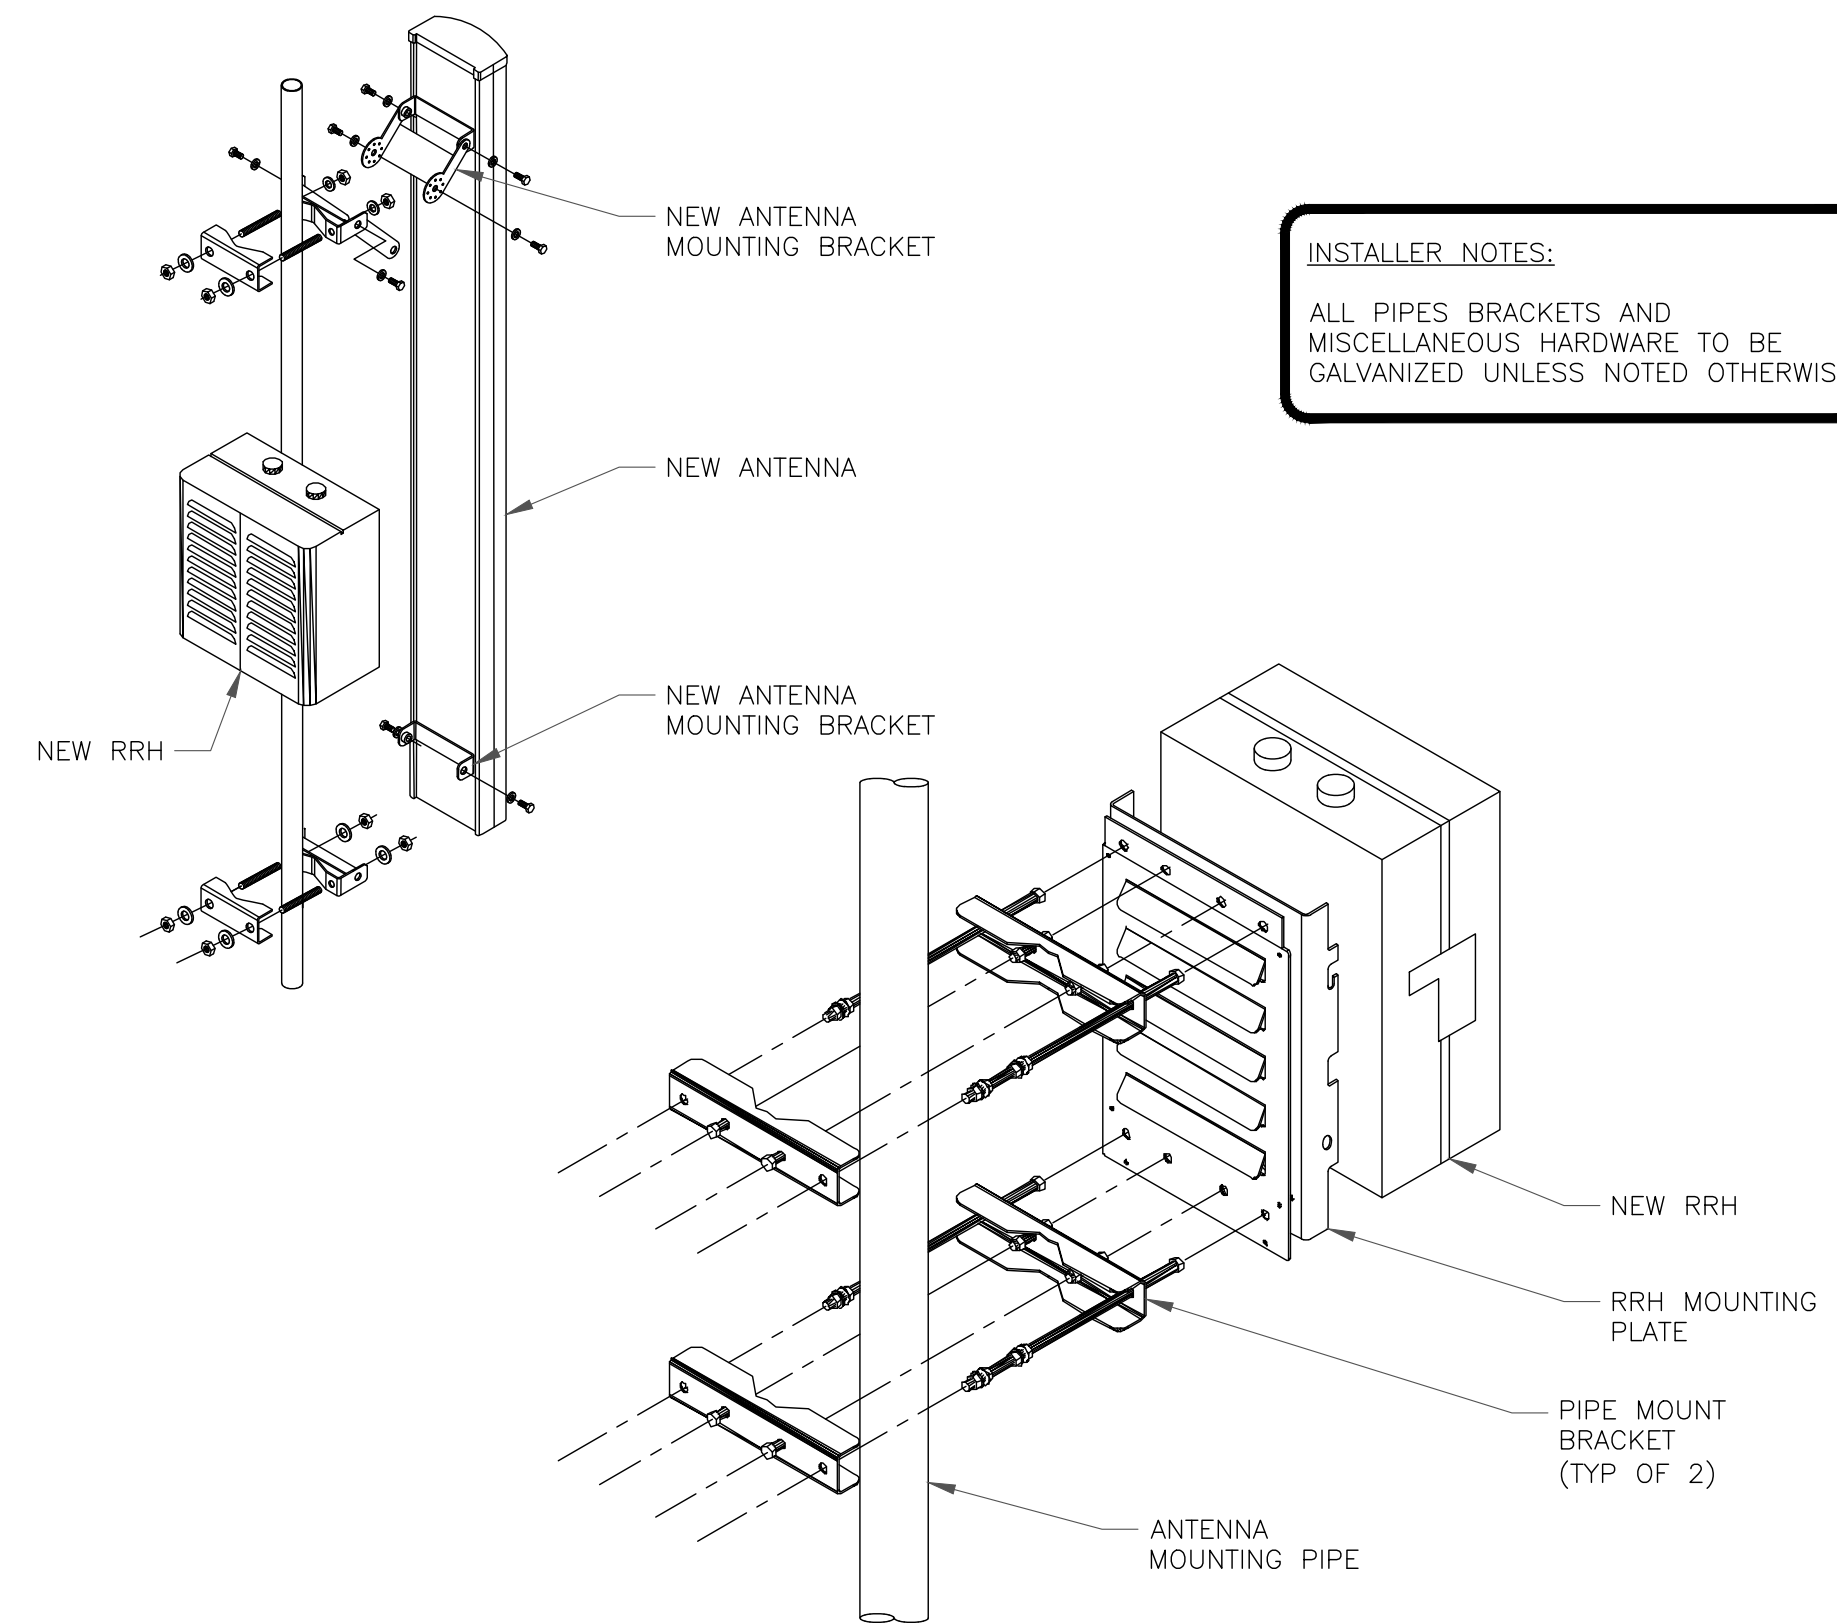

INSTALLER NOTES:
ALL PIPES BRACKETS AND MISCELLANEOUS HARDWARE TO BE GALVANIZED UNLESS NOTED OTHERWISE.

4 ANTENNA & RRH MOUNTING DETAIL
SCALE: NOT TO SCALE

verizon
180 WASHINGTON VALLEY ROAD
BEDMINSTER, NJ 07921

CROWN CASTLE
1500 CORPORATE DRIVE
CANONSBURG, PA 15317

INFINIGY
FROM ZERO TO INFINIGY
the solutions are endless
BELLEVUE, WA 98004

VERIZON SITE NUMBER:
468396

BU #: **873645**
OXFORD

691 OXFORD ROAD
OXFORD, CT 06478

EXISTING 150'-0" MONOPOLE

ISSUED FOR:

| REV | DATE | DRWN | DESCRIPTION | DES./QA |
|-----|------------|------|-------------|---------|
| 0 | 06/03/2021 | RCD | FINAL CDs | -- |
| 1 | 07/01/2021 | PEG | FINAL CDs | -- |


STATE OF CONNECTICUT
HUHEI SAKANOU
34916
LICENSED PROFESSIONAL ENGINEER
7/1/2021

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SHEET NUMBER: **C-4** REVISION: **1**

VERIZON SUB6 – VZS01 PANEL ANTENNA

DIMENSIONS, HxWxD: 35.12"x16.06"x5.51"
 WEIGHT, W/O BRACKETS: 87.10 lbs

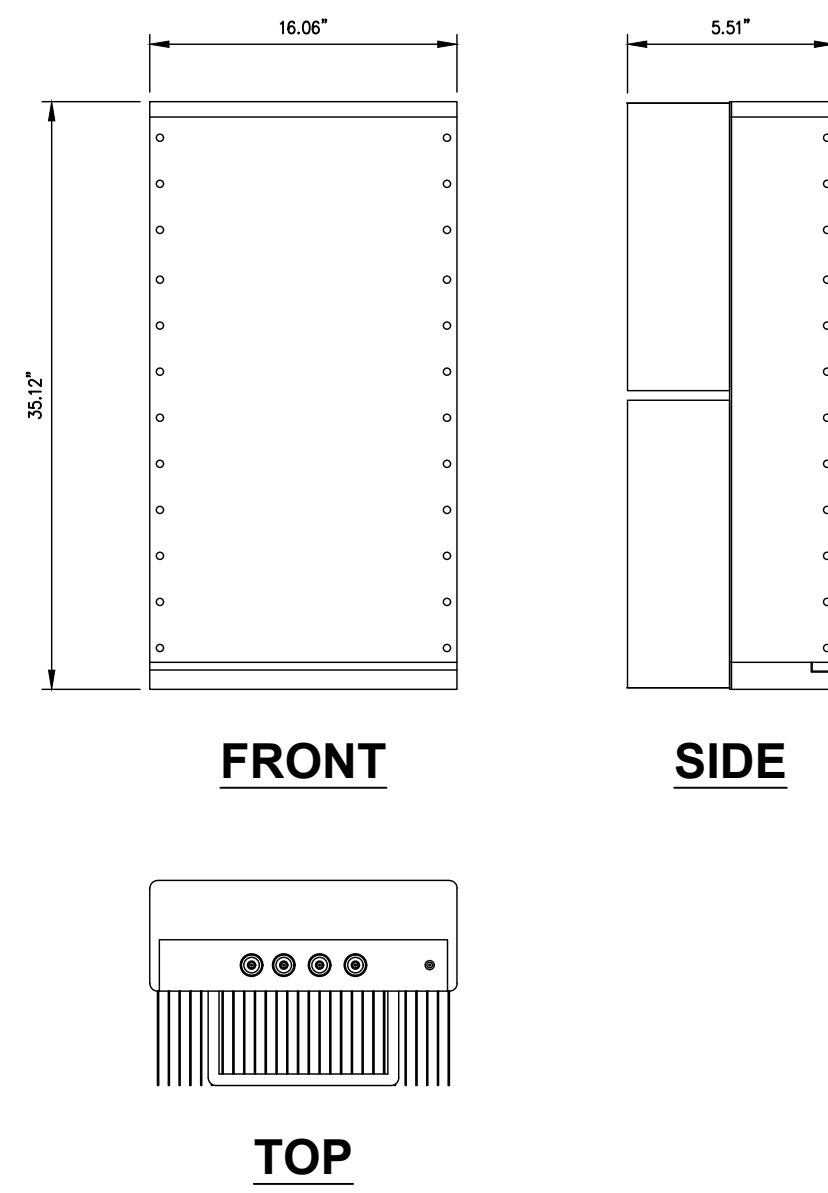

1 VERIZON SUB6 – VZS01 ANTENNA DETAIL
 SCALE: NOT TO SCALE

2 NOT USED
 SCALE:

3 NOT USED
 SCALE:

verizon
 180 WASHINGTON VALLEY ROAD
 BEDMINSTER, NJ 07921

CROWN CASTLE
 1500 CORPORATE DRIVE
 CANONSBURG, PA 15317

INFINIGY
 FROM ZERO TO INFINIGY
 the solutions are endless
 BELLEVUE, WA 98004

VERIZON SITE NUMBER:
468396

BU #: **873645**
OXFORD

691 OXFORD ROAD
 OXFORD, CT 06478

EXISTING 150'-0" MONOPOLE

ISSUED FOR:

| REV | DATE | DRWN | DESCRIPTION | DES./QA |
|-----|------------|------|-------------|---------|
| 0 | 06/03/2021 | RCD | FINAL CDs | -- |
| 1 | 07/01/2021 | PEG | FINAL CDs | -- |

STATE OF CONNECTICUT
 HUHEI SAKANOE
 34916
 LICENSED PROFESSIONAL ENGINEER


7/1/2021

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

| | |
|-----------------------------|-----------------------|
| SHEET NUMBER: C-5 | REVISION: 1 |
|-----------------------------|-----------------------|

COMMSCOPE – DIPLEXER (CBC78-T-DS-43)


DIMENSIONS, HxWxD: 11.03"x8.47"x6.93"
 WEIGHT, W/O BRACKETS: TBD

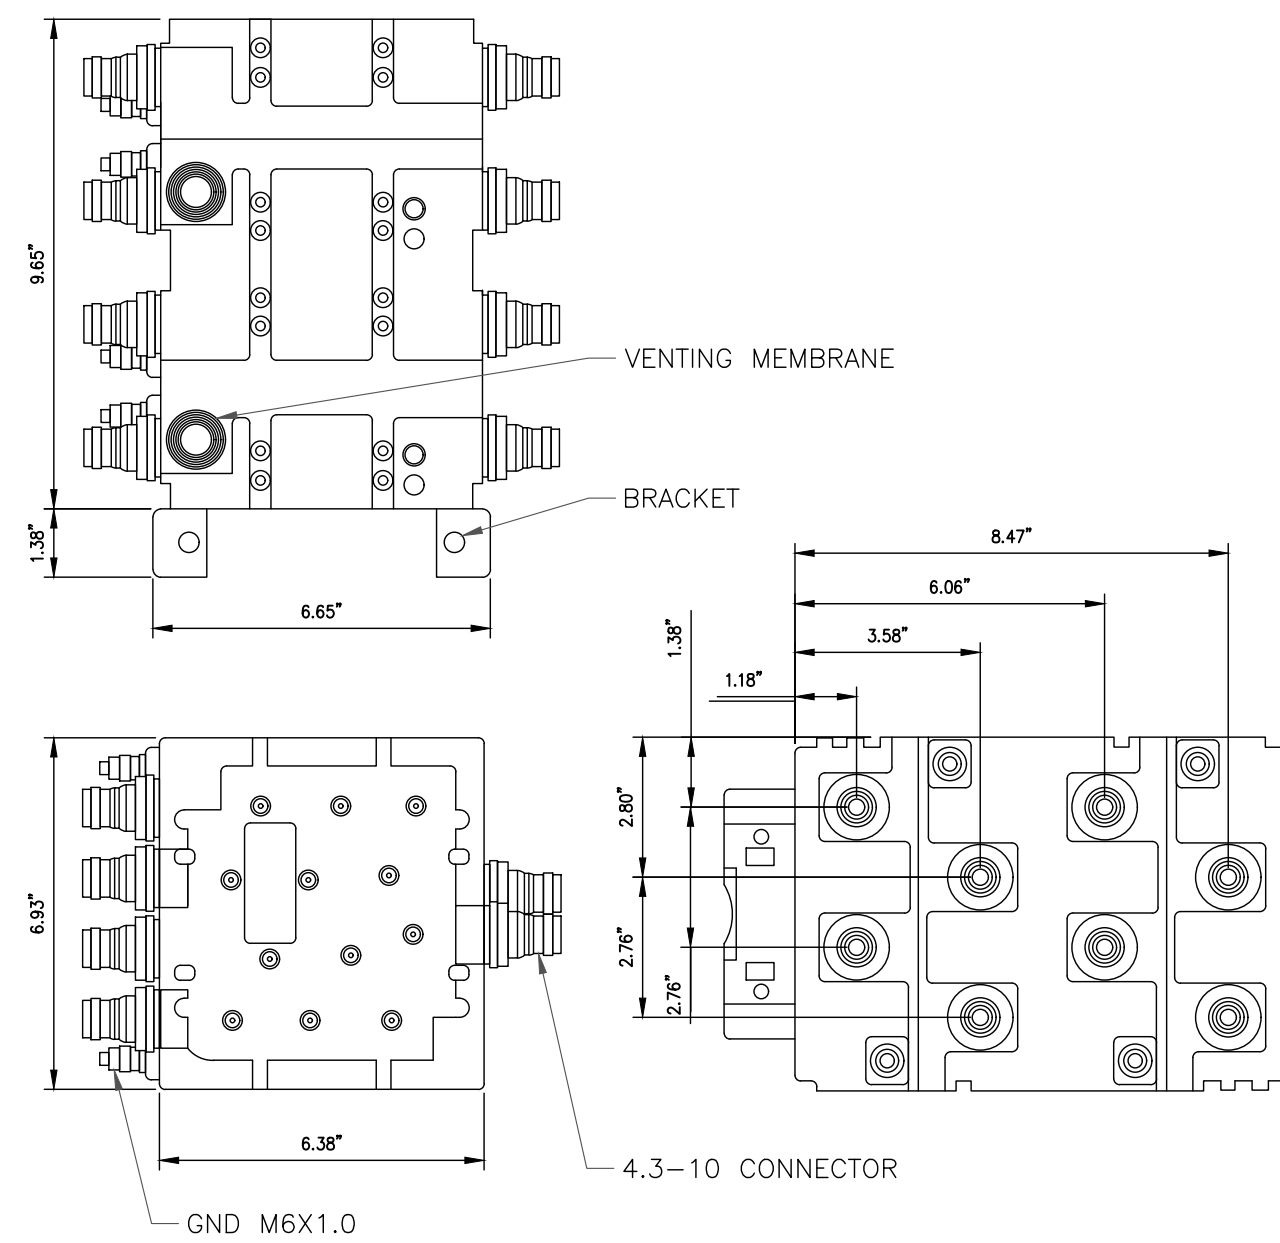

4 COMMSCOPE – CBC78T-DS-43-2X
 SCALE: NOT TO SCALE

SAMSUNG – RRH (RFV01U-D1A)


DIMENSIONS, HxWxD: 19.73"x14.96"x10.04"
 WEIGHT, W/O BRACKETS: 84.4 lbs

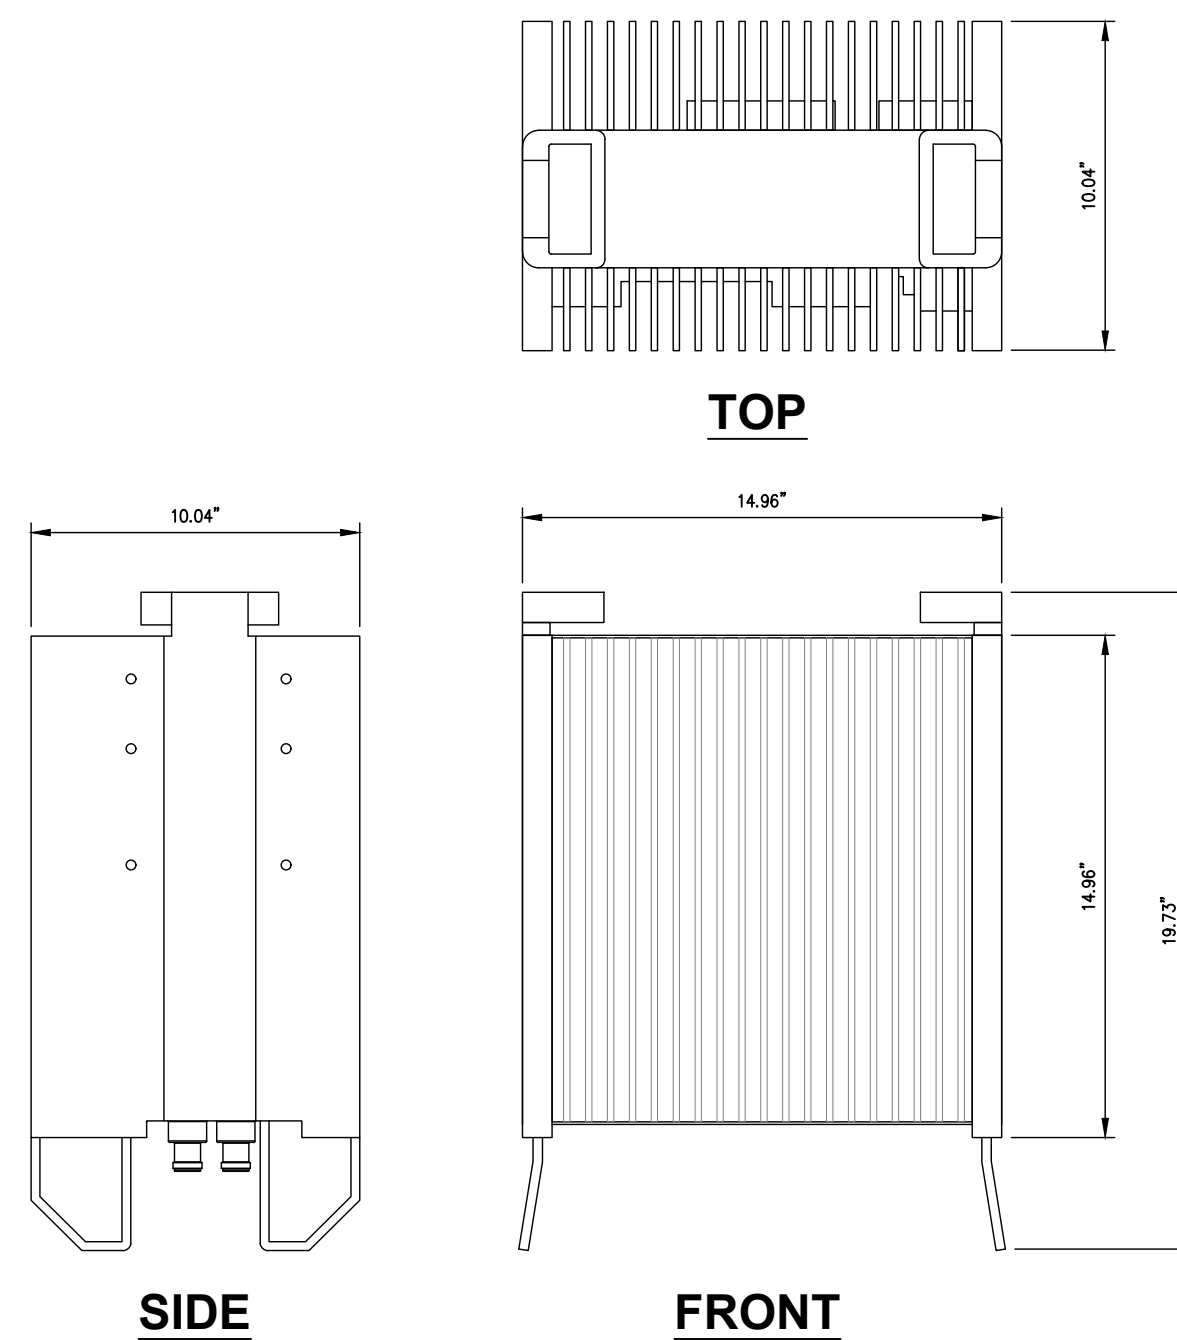


5 SAMSUNG – RFV01U-D1A RRH DETAIL
 SCALE: NOT TO SCALE

SAMSUNG – RRH (RFV01U-D2A)

DIMENSIONS, HxWxD: 19.73"x15.0"x8.1"
 WEIGHT, W/O BRACKETS: 70.3 lbs


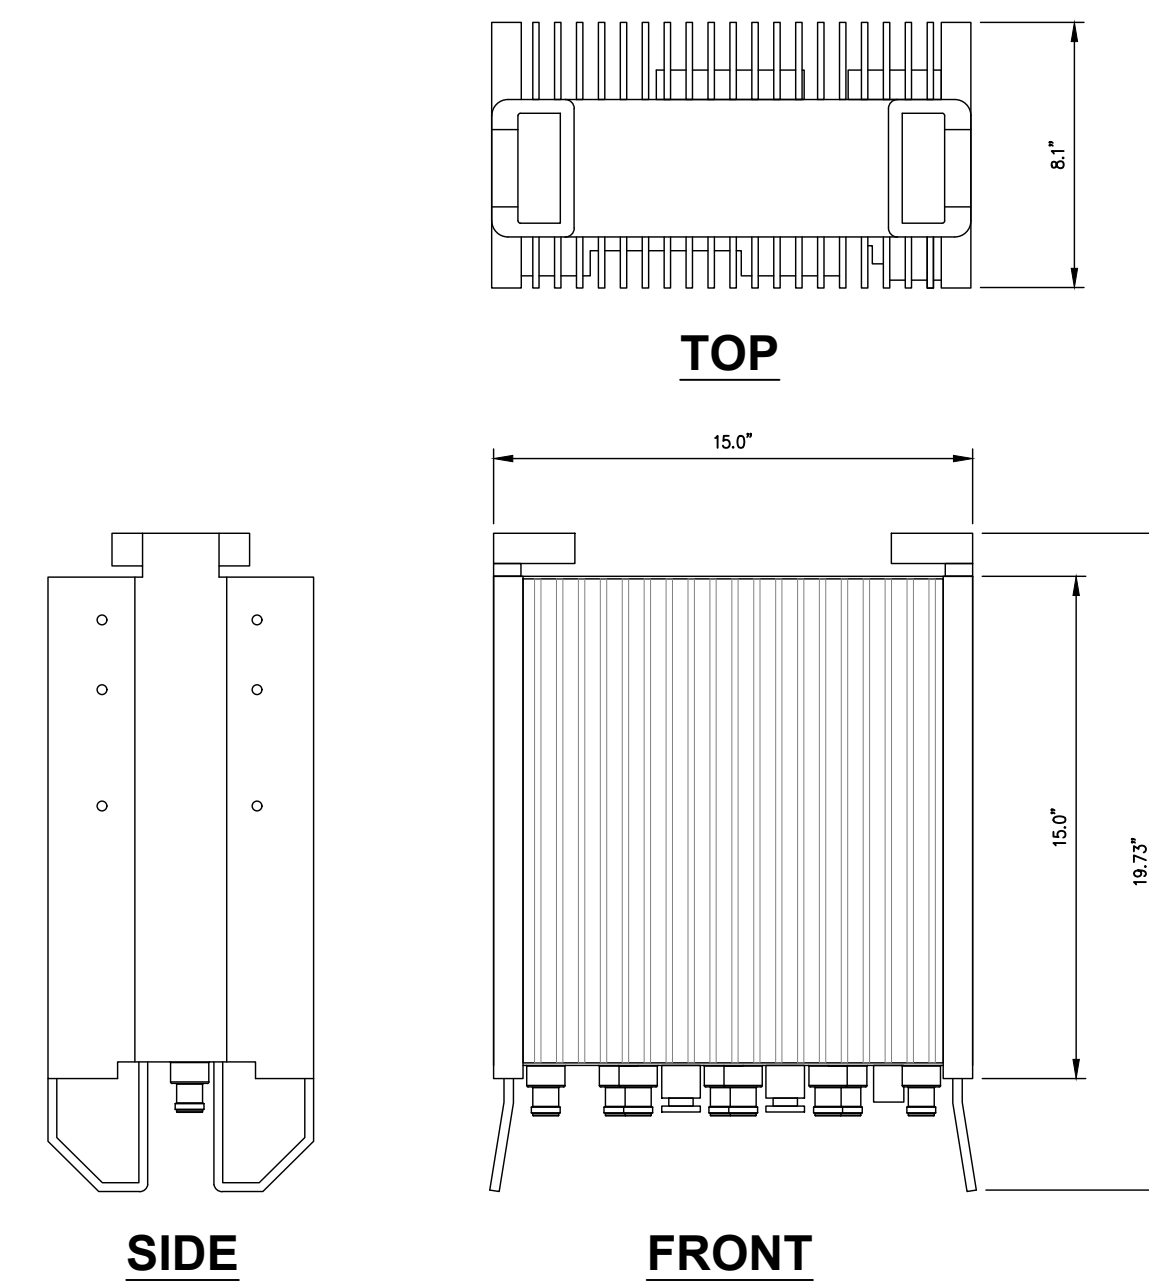


6 SAMSUNG – RFV01U-D2A RRH DETAIL
 SCALE: NOT TO SCALE

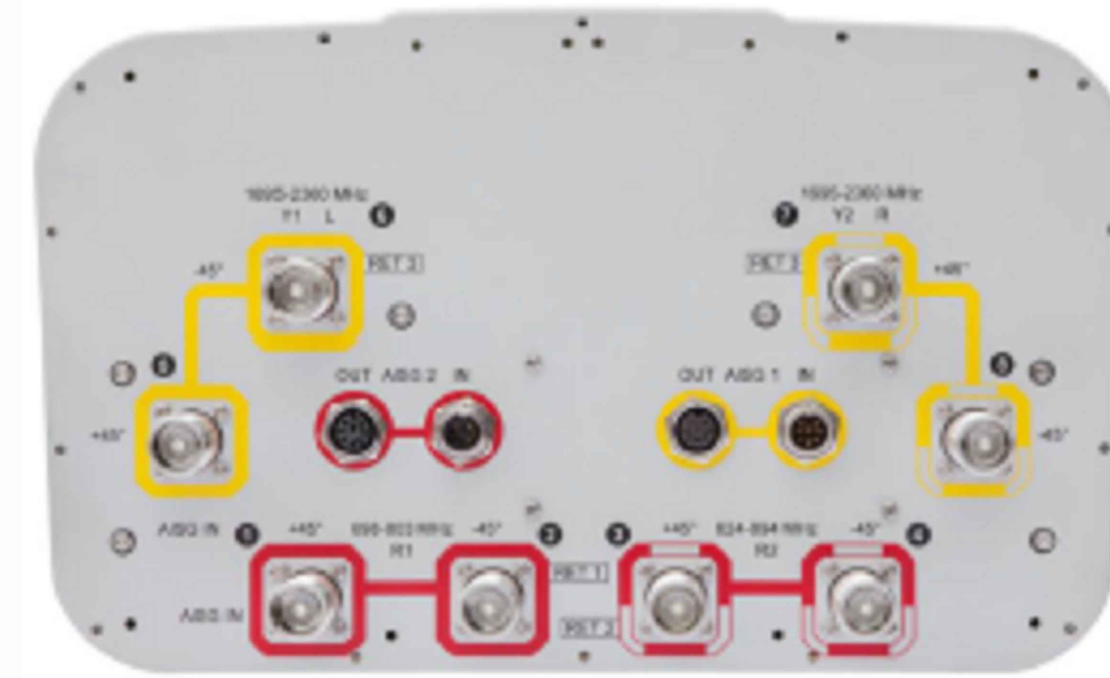

BSAMNT-SBS-2-2

- Port 1 & 2 are for low band (698-896 MHz).
- Port 3,4,5, & 6 are for high band (1695-2360 MHz).
- Smart Bias Tee (SBT) is through port 1 & 3 for low band and port 1 for high band.
- AISG cable is only needed when drawn in the diagrams below, if it is not drawn then SBT is enough to control all RET motors.
- Not all SBT ports are needed to control RET, only green port connection to green port will control RET.

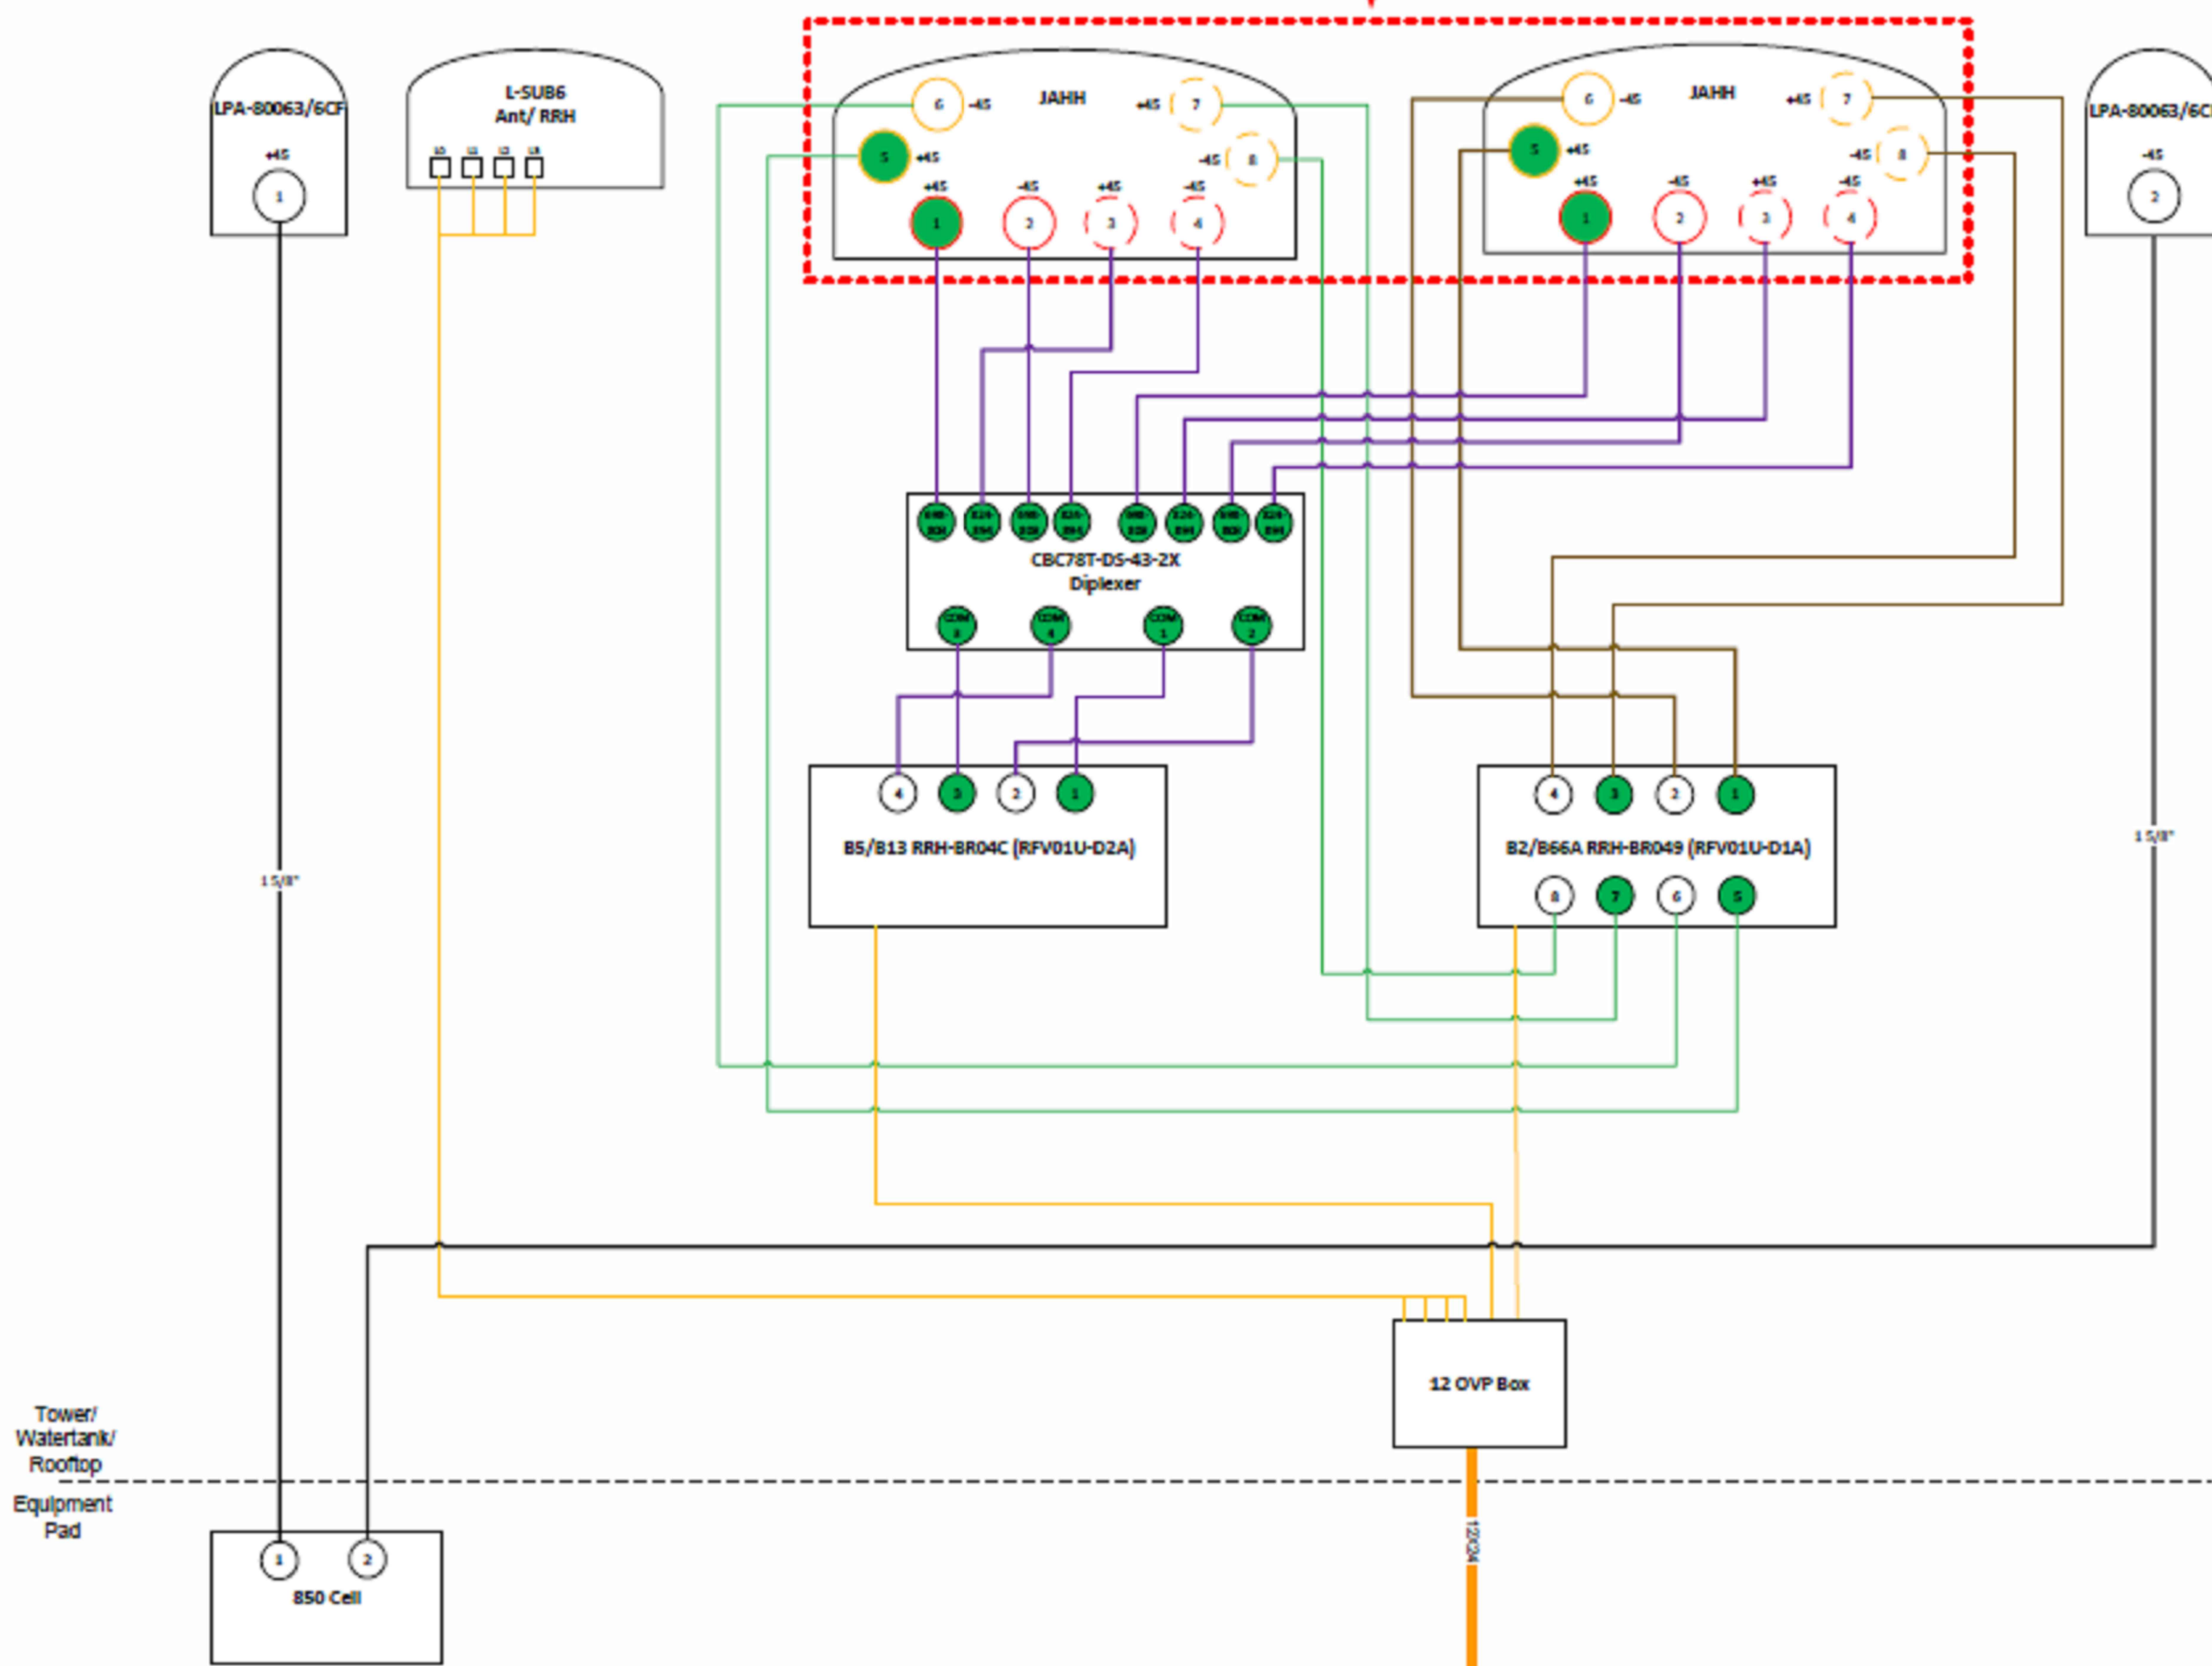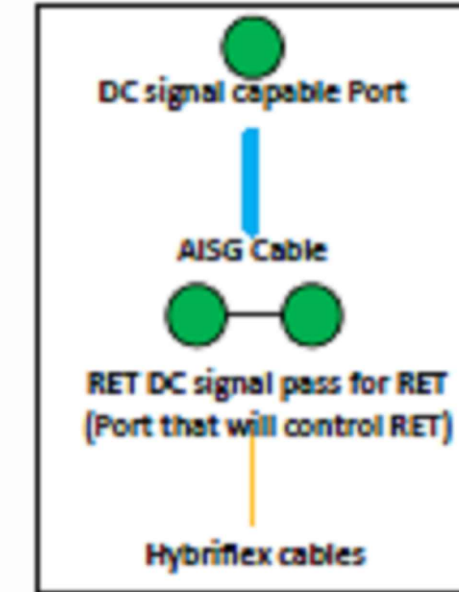

Comments:

Diagram shows antenna port configuration as viewed from below antennas.

Antenna positions are indicated as viewed from IN FRONT of antennas.

Cap and weatherproof unused antenna ports.

All plumbing diagram colors are irrelevant except for AISG & Hybriflex cable. (For the coax colors follow Coax Colors guide above)

verizon
 180 WASHINGTON VALLEY ROAD
 BEDMINSTER, NJ 07921

CROWN CASTLE
 1500 CORPORATE DRIVE
 CANONSBURG, PA 15317

INFINIGY
 FROM ZERO TO INFINIGY
 the solutions are endless
 BELLEVUE, WA 98004

VERIZON SITE NUMBER:
 468396

BU #: 873645
 OXFORD

691 OXFORD ROAD
 OXFORD, CT 06478

EXISTING 150'-0" MONOPOLE


ISSUED FOR:

| REV | DATE | DRWN | DESCRIPTION | DES./QA |
|-----|------------|------|-------------|---------|
| 0 | 06/03/2021 | RCD | FINAL CDs | -- |
| 1 | 07/01/2021 | PEG | FINAL CDs | -- |

7/1/2021

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.


SHEET NUMBER: **C-6** REVISION: **1**

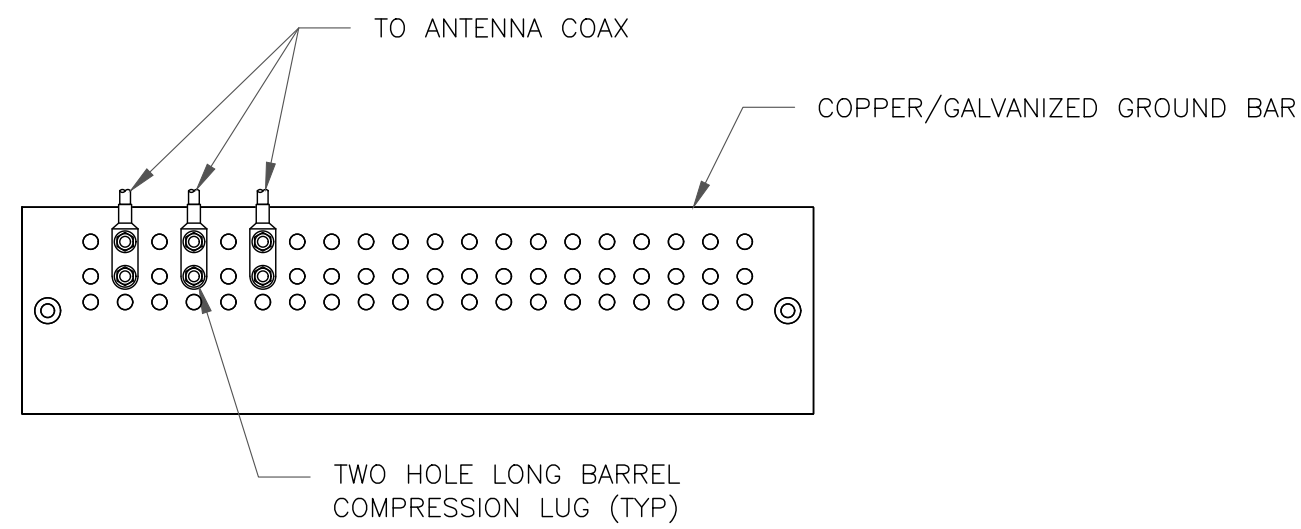

NOTES:

- DOUBLING UP "OR STACKING" OF CONNECTIONS IS NOT PERMITTED.
- EXTERIOR ANTIOXIDANT JOINT COMPOUND TO BE USED ON ALL EXTERIOR CONNECTIONS.
- GROUND BAR SHALL NOT BE ISOLATED FROM TOWER. MOUNT DIRECTLY TO ANTENNA MOUNT STEEL.


1 ANTENNA SECTOR GROUND BAR DETAIL
SCALE: NOT TO SCALE

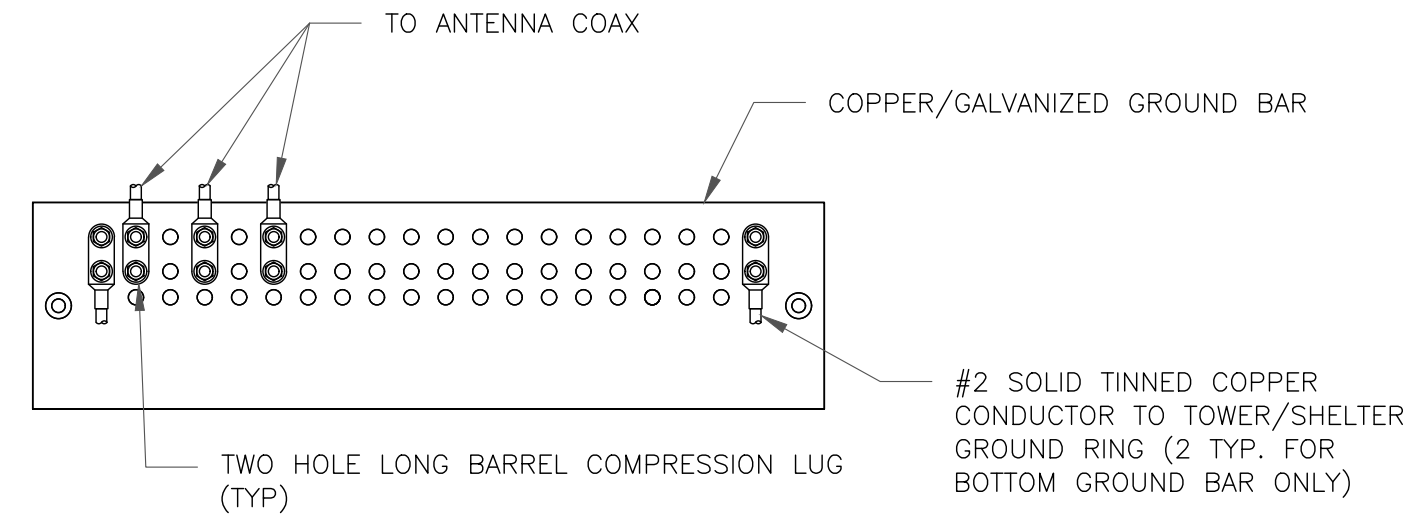

NOTES:

- EXTERIOR ANTIOXIDANT JOINT COMPOUND TO BE USED ON ALL EXTERIOR CONNECTIONS.
- GROUND BAR SHALL NOT BE ISOLATED FROM TOWER. MOUNT DIRECTLY TO TOWER STEEL (TOWER ONLY).
- GROUND BAR SHALL BE ISOLATED FROM BUILDING OR SHELTER.


2 TOWER/SHELTER GROUND BAR DETAIL
SCALE: NOT TO SCALE

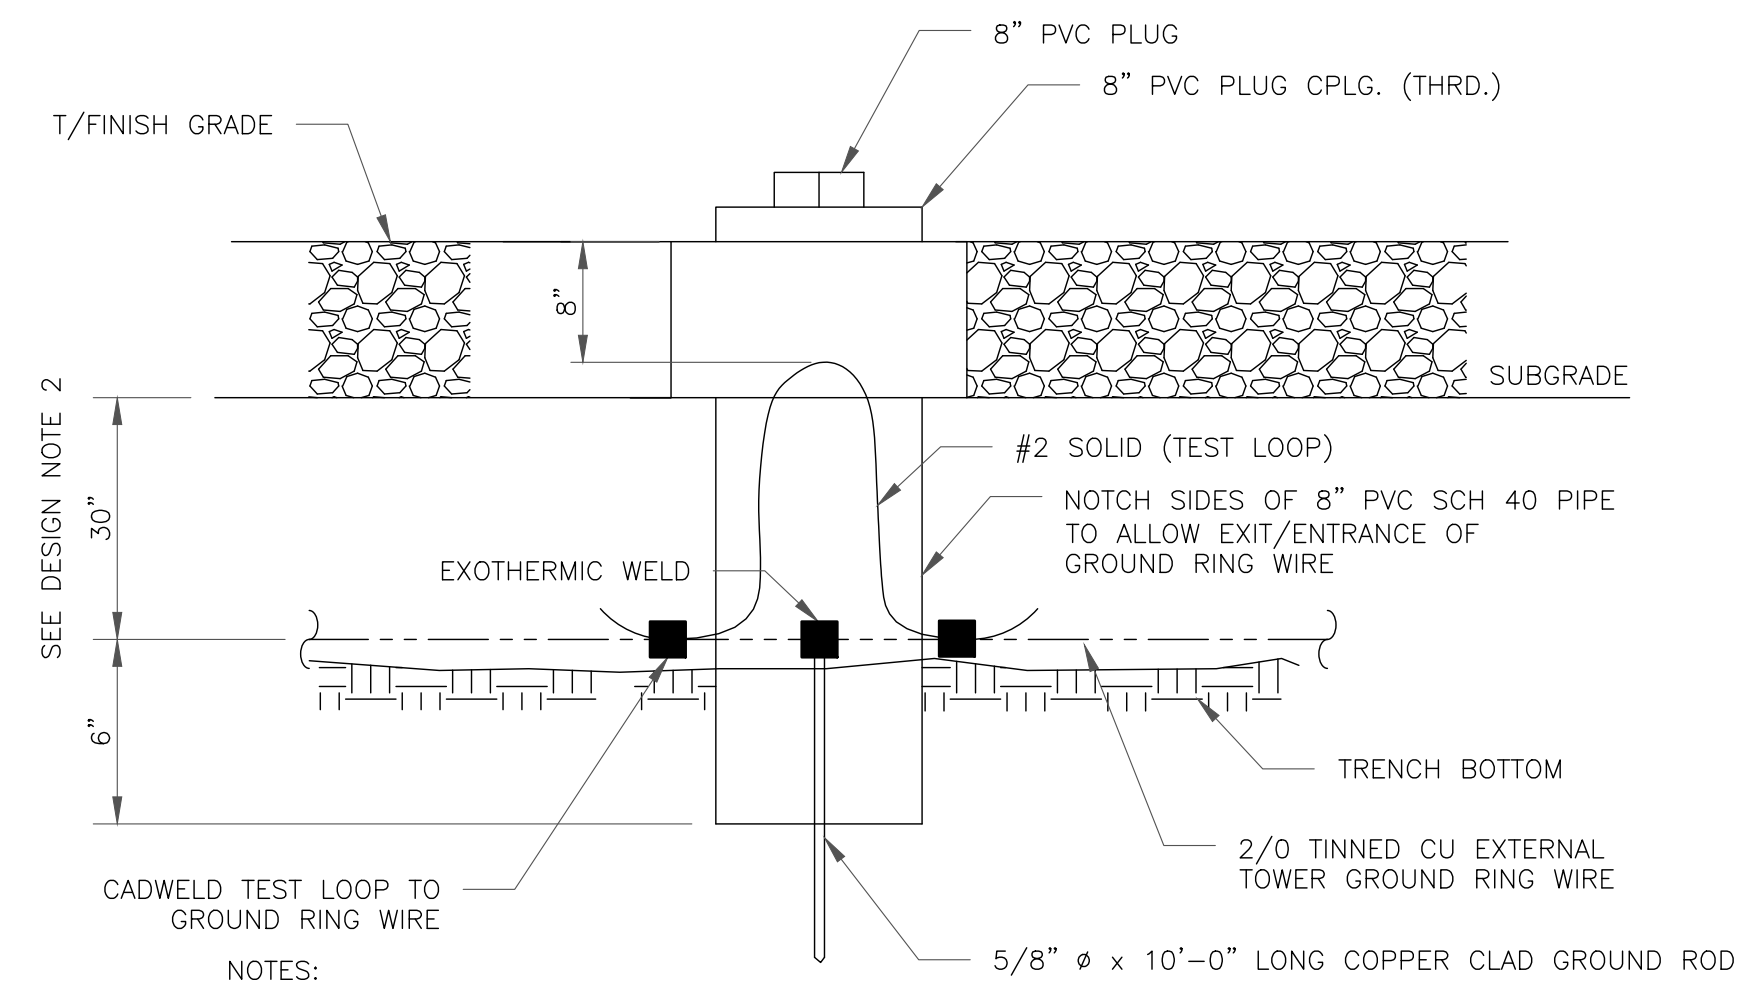

NOTES:

- GROUND ROD SHALL BE DRIVEN VERTICALLY, NOT TO EXCEED 45 DEGREES FROM THE VERTICAL
- GROUND WIRE SHALL BE MIN. 30" BELOW GRADE OR 6" BELOW FROST LINE. (WHICH EVER IS GREATER) AS PER N.E.C. ARTICLE 250-50(D)


3 INSPECTION WELL DETAIL
SCALE: NOT TO SCALE

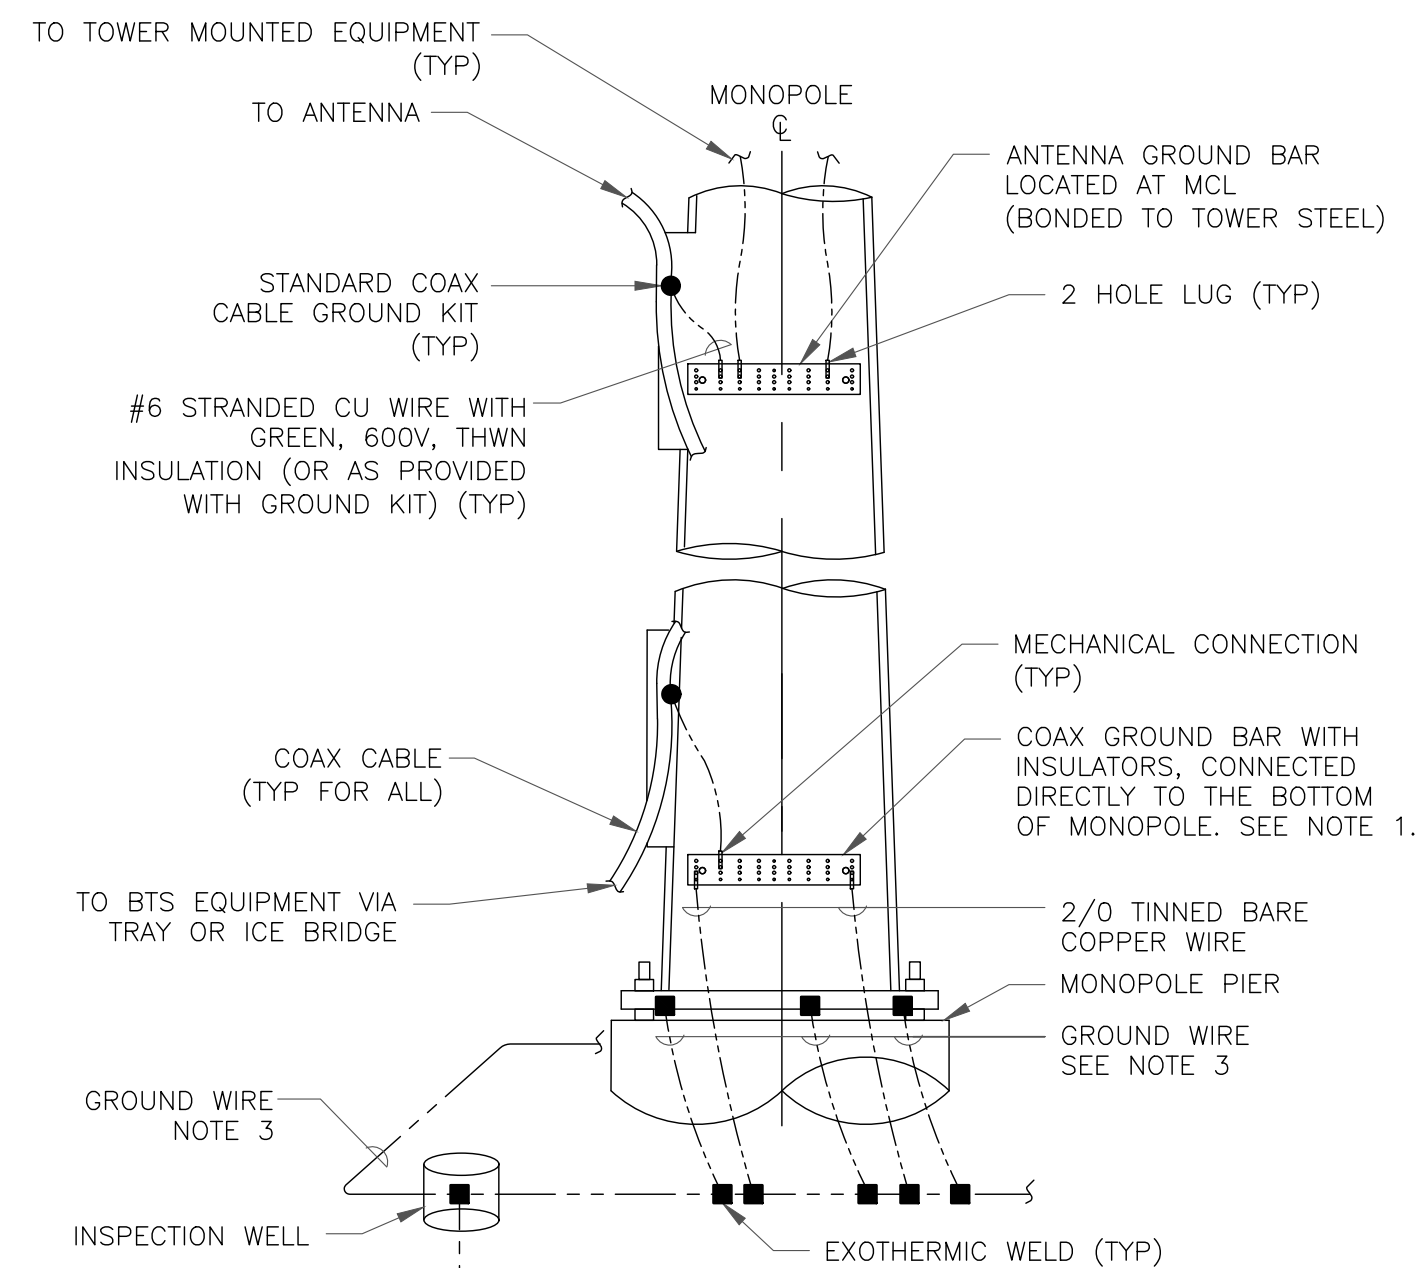


NOTES:

- NUMBER OF GROUNDING BARS MAY VARY DEPENDING ON THE TYPE OF TOWER, ANTENNA LOCATIONS AND CONNECTION ORIENTATION. COAXIAL CABLES EXCEEDING 200 FEET ON THE TOWER SHALL HAVE GROUND KITS AT THE MIDPOINT. PROVIDE AS REQUIRED.
- ONLY MECHANICAL CONNECTIONS ARE ALLOWED TO BE MADE TO CROWN CASTLE USA INC. TOWERS. ALL MECHANICAL CONNECTIONS SHALL BE TREATED WITH AN ANTI-OXIDANT COATING.
- ALL TOWER GROUNDING SYSTEMS SHALL COMPLY WITH THE REQUIREMENTS OF THE RECOGNIZED EDITION OF ANSI/TIA 222 AND NFPA 780.


4 TYPICAL ANTENNA CABLE GROUNDING
SCALE: NOT TO SCALE

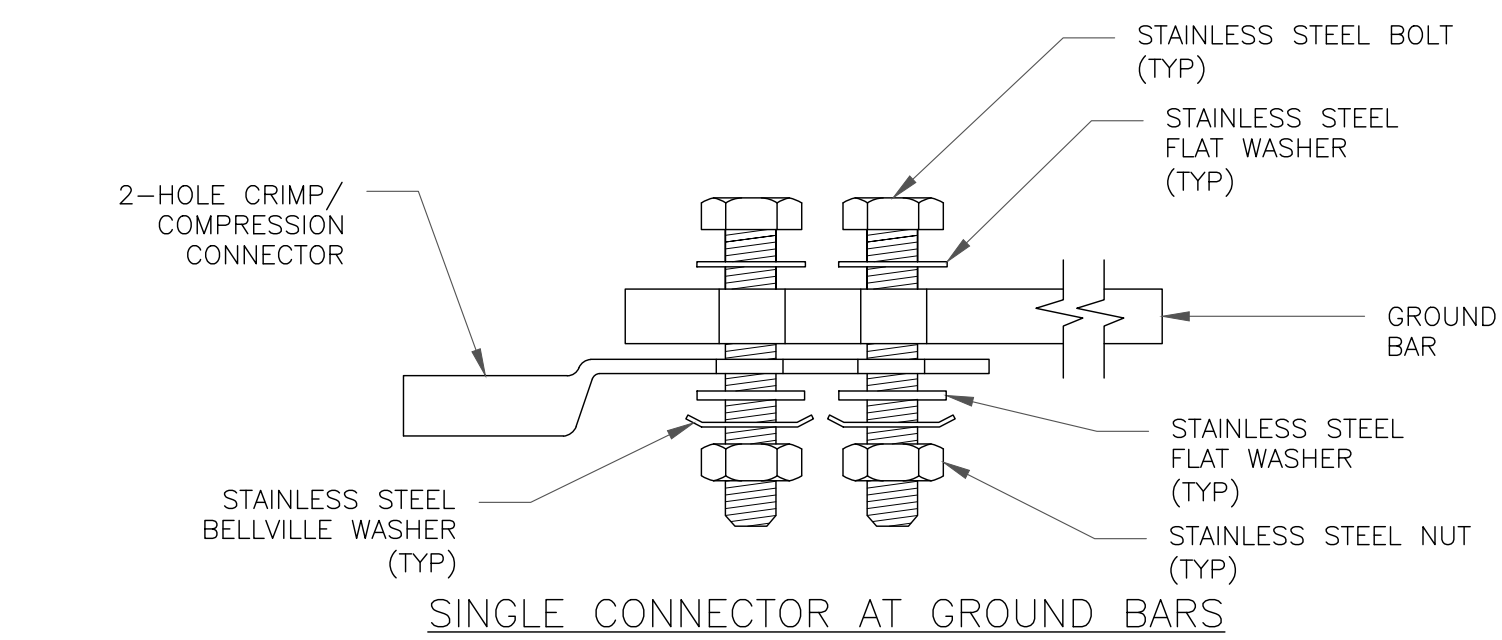

SINGLE CONNECTOR AT GROUND BARS

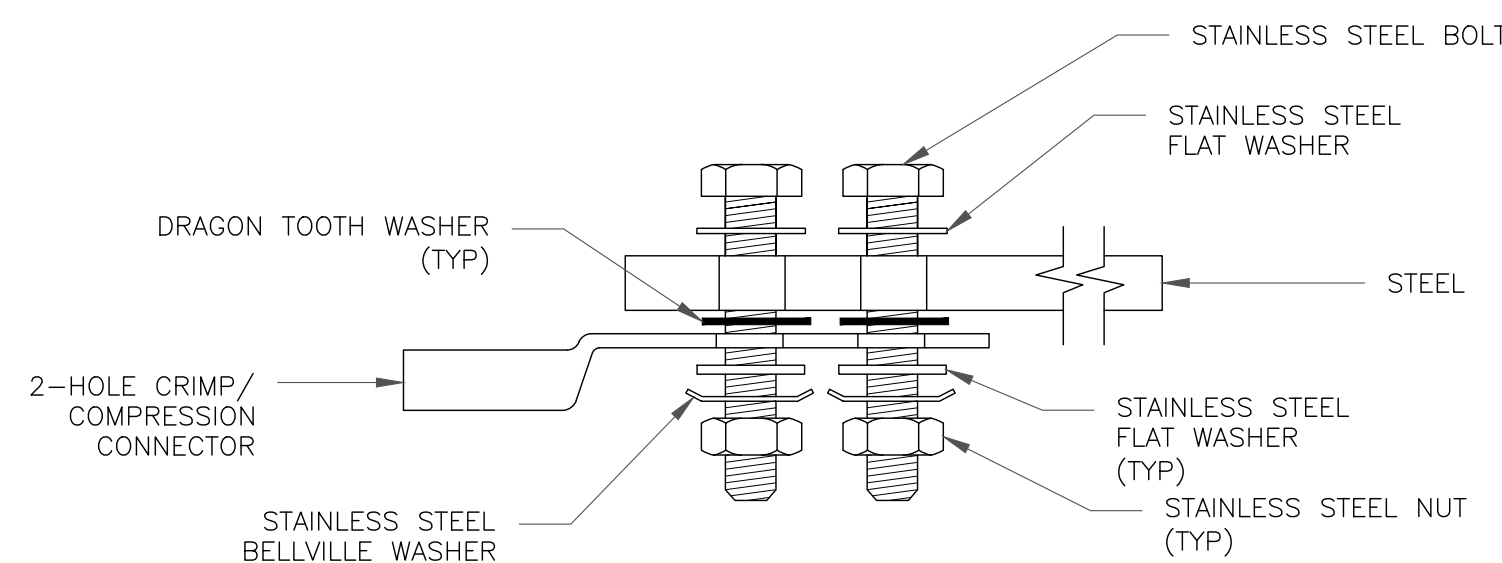


SINGLE CONNECTOR AT STEEL OBJECTS

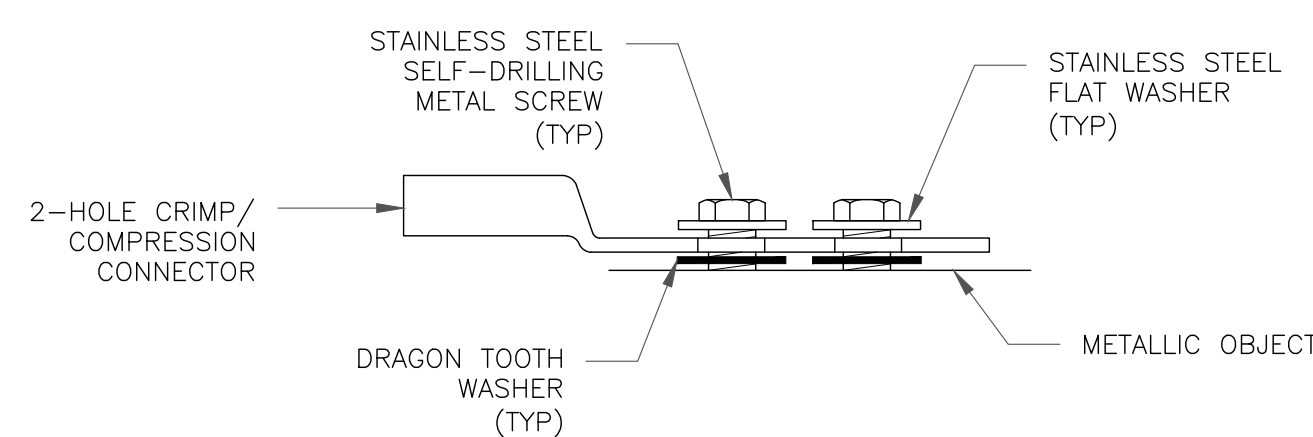

SINGLE CONNECTOR AT METALLIC/STEEL OBJECTS

5 HARDWARE DETAIL FOR EXTERIOR CONNECTIONS
SCALE: NOT TO SCALE

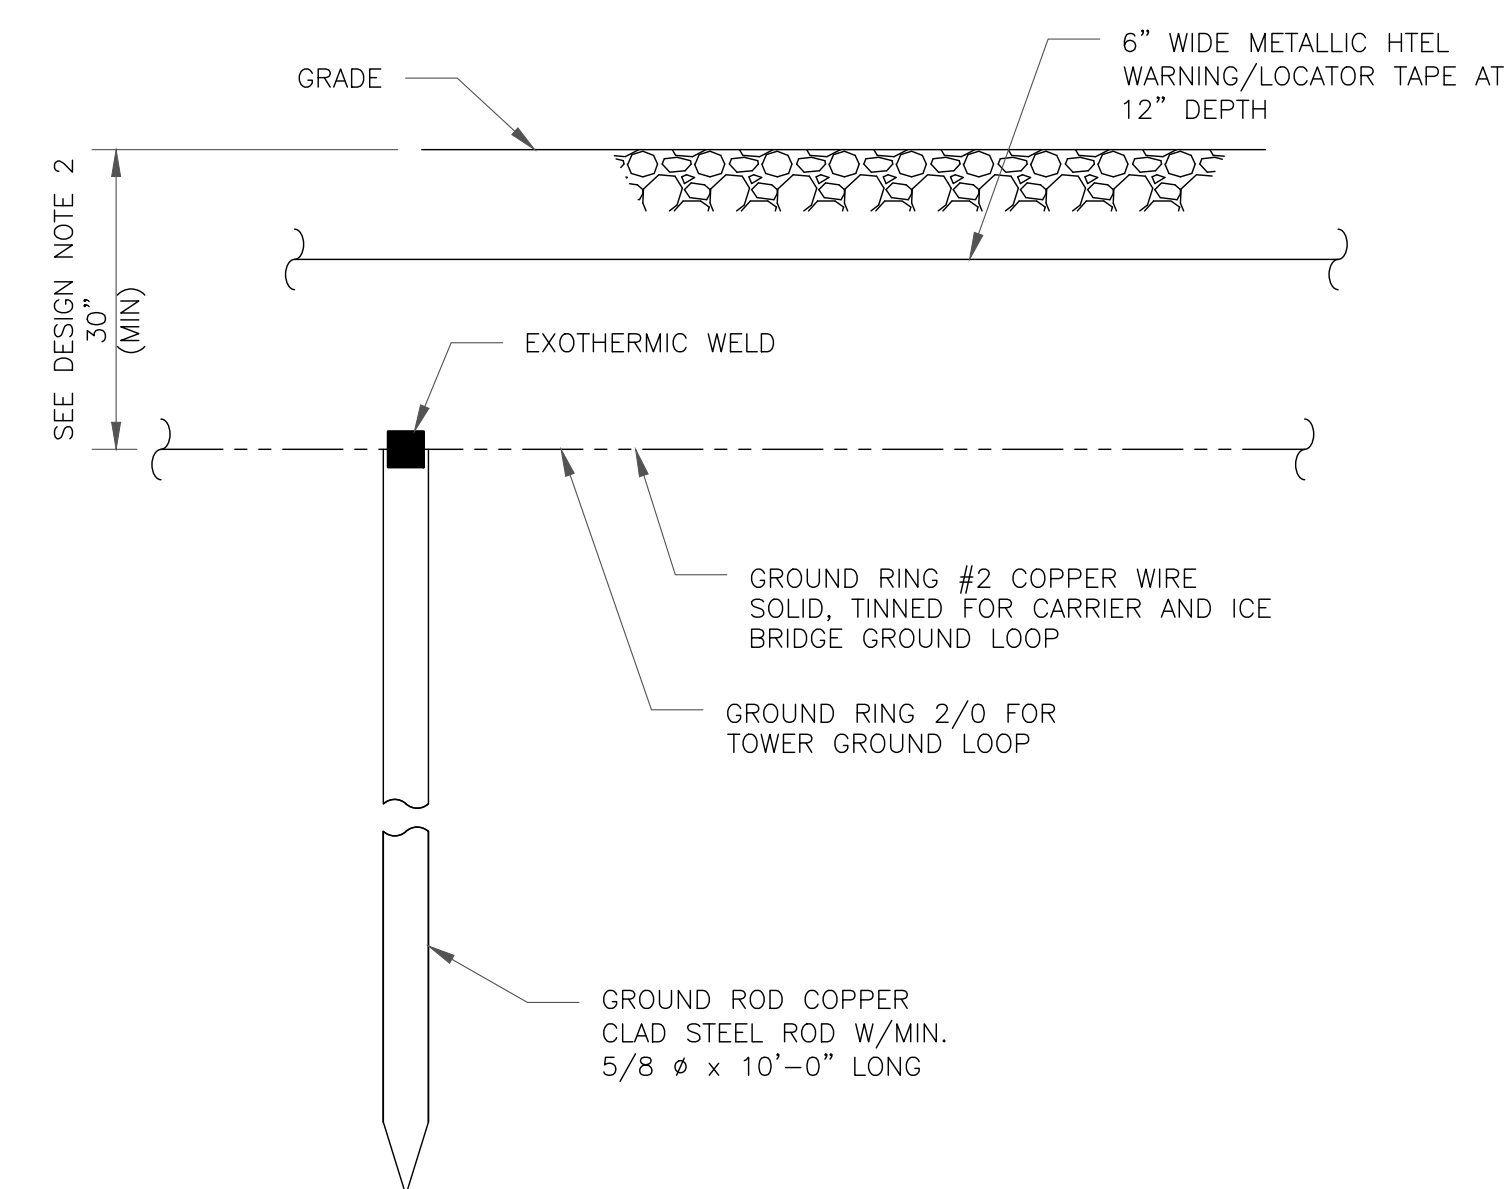

NOTES:

- GROUND ROD SHALL BE DRIVEN VERTICALLY, NOT TO EXCEED 45 DEGREES FROM THE VERTICAL
- GROUND WIRE SHALL BE MIN. 30" BELOW GRADE OR 6" BELOW FROST LINE. (WHICH EVER IS GREATER) AS PER N.E.C. ARTICLE 250-50(D)

6 GROUND ROD DETAIL
SCALE: NOT TO SCALE

verizon
180 WASHINGTON VALLEY ROAD
BEDMINSTER, NJ 07921

CROWN CASTLE
1500 CORPORATE DRIVE
CANONSBURG, PA 15317

INFINIGY
FROM ZERO TO INFINIGY
the solutions are endless
BELLEVUE, WA 98004

VERIZON SITE NUMBER:
468396

BU #: **873645**
OXFORD

691 OXFORD ROAD
OXFORD, CT 06478

EXISTING 150'-0" MONOPOLE


ISSUED FOR:

| REV | DATE | DRWN | DESCRIPTION | DES./QA |
|-----|------------|------|-------------|---------|
| 0 | 06/03/2021 | RCD | FINAL CDs | -- |
| 1 | 07/01/2021 | PEG | FINAL CDs | -- |

STATE OF CONNECTICUT
HUHEI SAKANOU
34916
LICENSED PROFESSIONAL ENGINEER
7/1/2021

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.


SHEET NUMBER: **G-1** REVISION: **1**

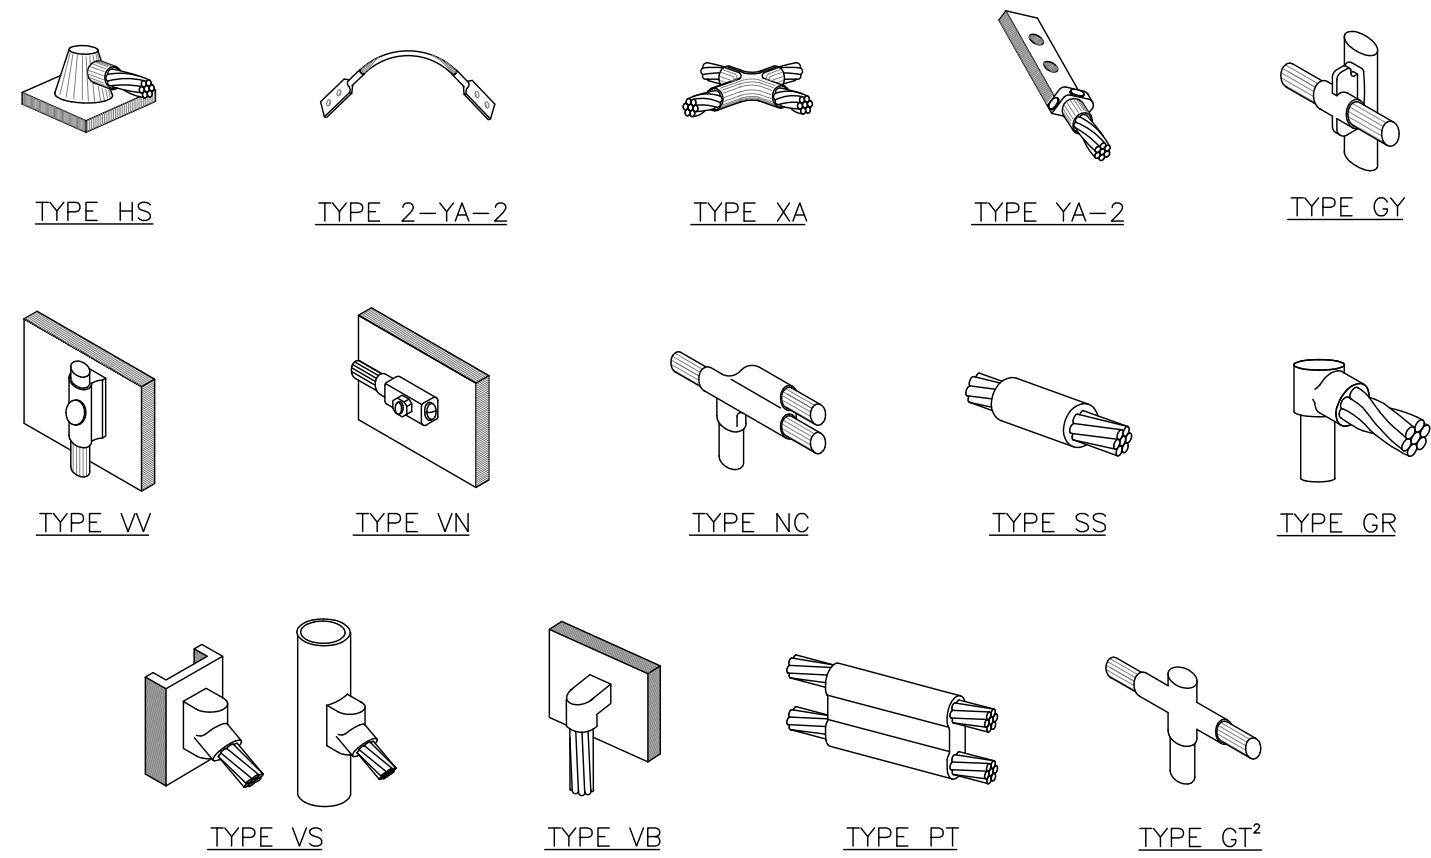

NOTE:

1. ERICO EXOTHERMIC "MOLD TYPES" SHOWN HERE ARE EXAMPLES. CONSULT WITH CONSTRUCTION MANAGER FOR SPECIFIC MOLDS TO BE USED FOR THIS PROJECT.
2. MOLD TYPE ONLY TO BE USED BELOW GRADE WHEN CONNECTING GROUND RING TO GROUND ROD.


1 CADWELD GROUNDING CONNECTIONS
SCALE: NOT TO SCALE

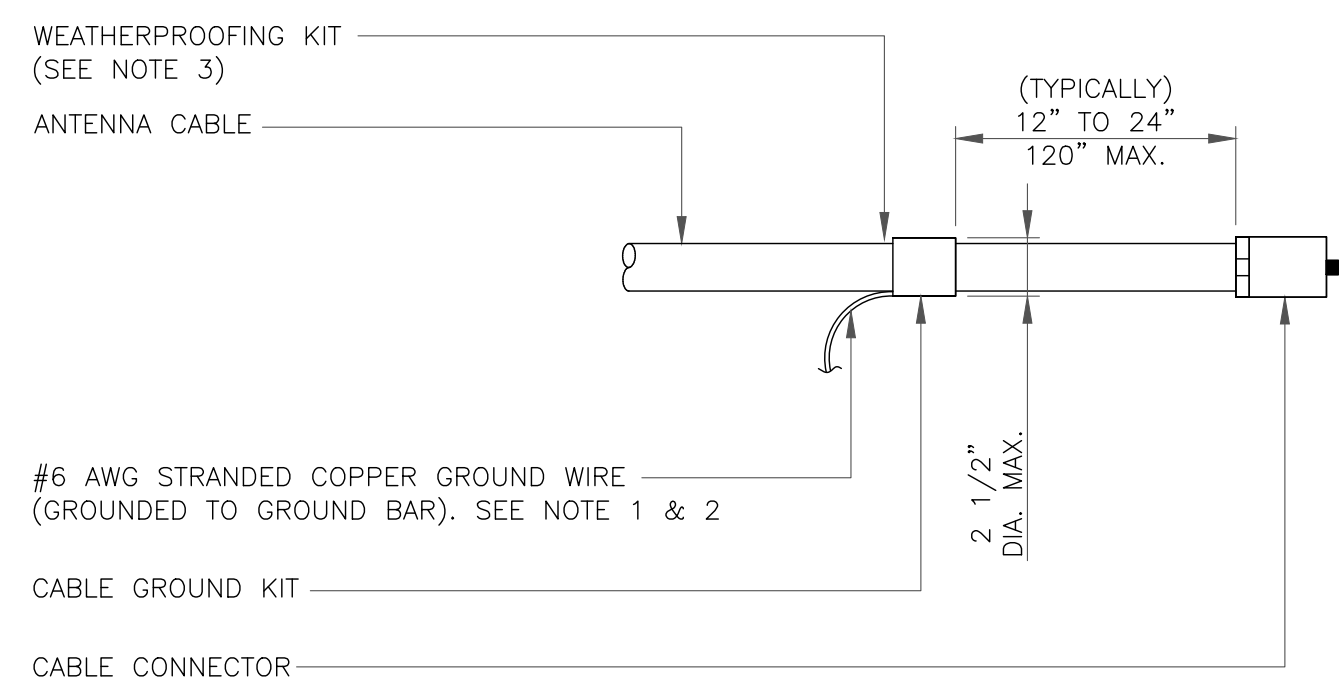

NOTES:

1. DO NOT INSTALL CABLE GROUND KIT AT A BEND AND ALWAYS DIRECT GROUND WIRE DOWN TO GROUND BAR.
2. GROUNDING KIT SHALL BE TYPE AND PART NUMBER AS SUPPLIED OR RECOMMENDED BY CABLE MANUFACTURER.
3. WEATHER PROOFING SHALL BE TWO-PART TAPE KIT. COLD SHRINK SHALL NOT BE USED.


3 CABLE GROUND KIT CONNECTION
SCALE: NOT TO SCALE

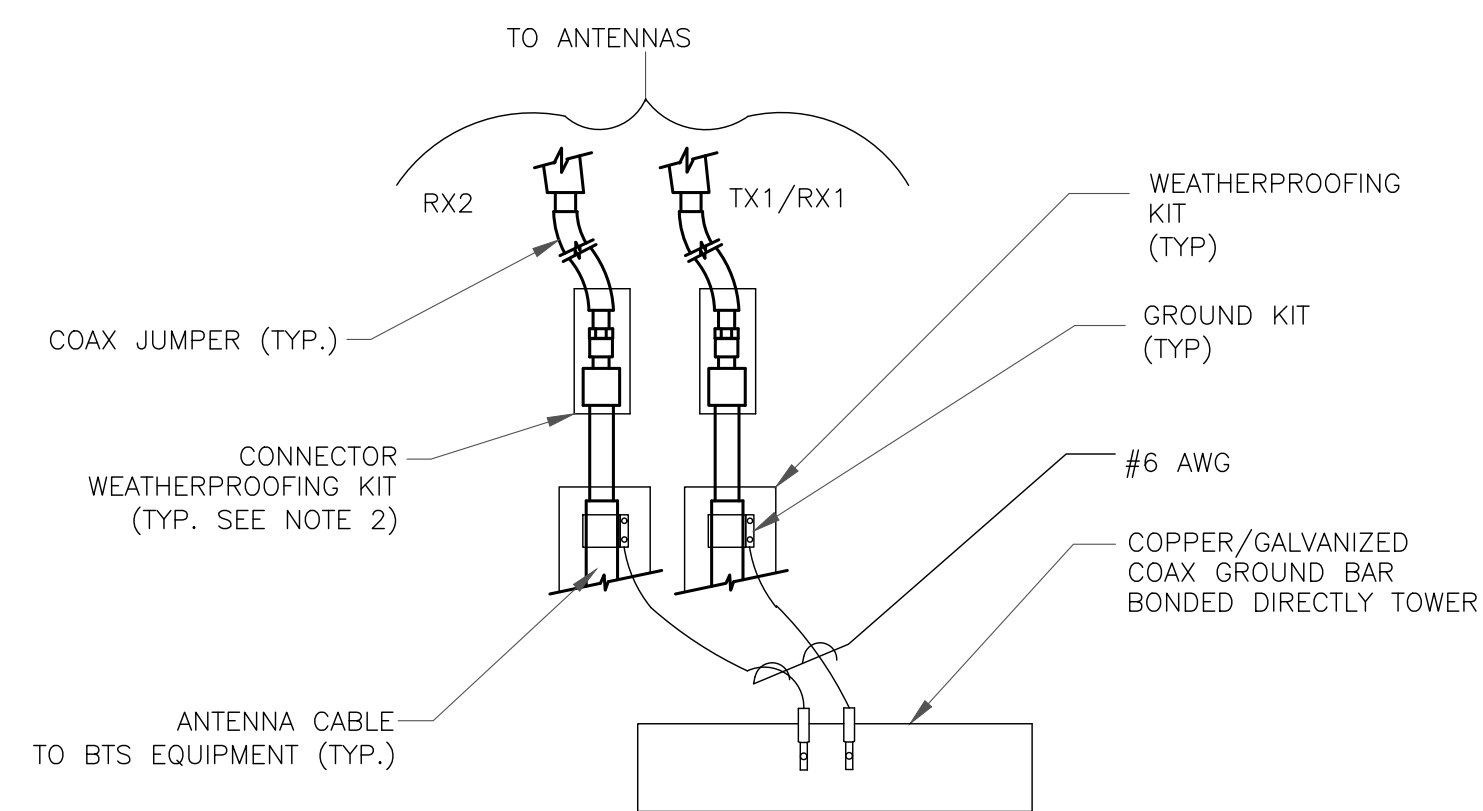

NOTES:

1. DO NOT INSTALL CABLE GROUND KIT AT A BEND AND ALWAYS DIRECT GROUND WIRE DOWN TO ANTENNA GROUND BAR.
2. WEATHER PROOFING SHALL BE TWO-PART TAPE KIT. COLD SHRINK SHALL NOT BE USED.


4 GROUND CABLE CONNECTION
SCALE: NOT TO SCALE

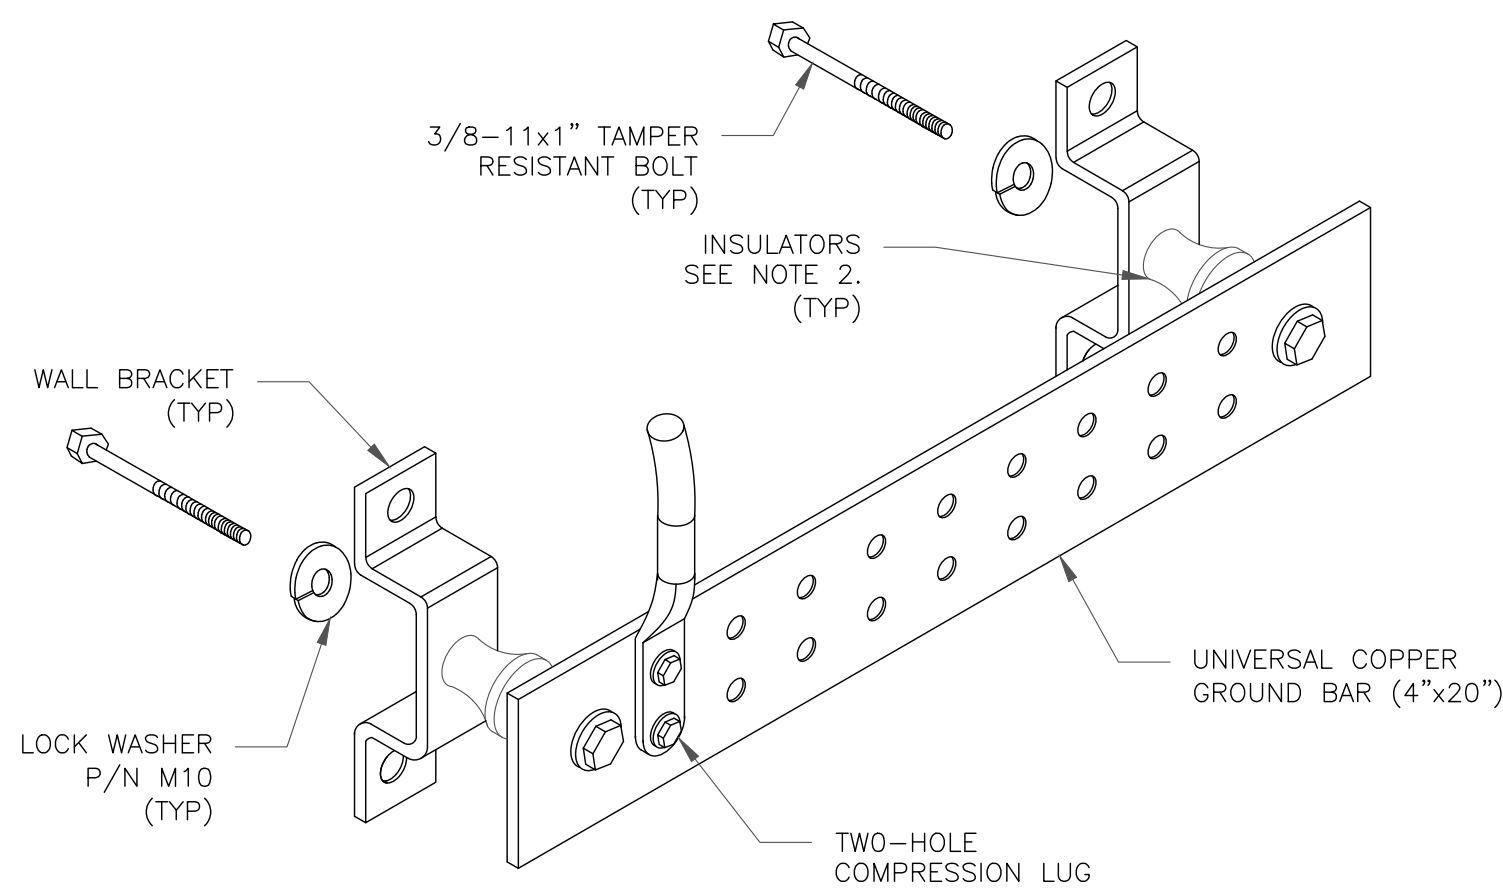

NOTES:


1. DOWN LEAD (HOME RUN) CONDUCTORS ARE NOT TO BE INSTALLED ON CROWN CASTLE USA INC. TOWER, PER THE GROUNDING DOWN CONDUCTOR POLICY QAS-STD-10091. NO MODIFICATION OR DRILLING TO TOWER STEEL IS ALLOWED IN ANY FORM OR FASHION. CAD-WELDING ON THE TOWER AND/OR IN THE AIR ARE NOT PERMITTED.
2. OMIT INSULATOR WHEN MOUNTING TO TOWER STEEL OR PLATFORM STEEL. USE INSULATORS WHEN ATTACHING TO BUILDING OR SHELTERS.

6 GROUND BAR DETAIL
SCALE: NOT TO SCALE

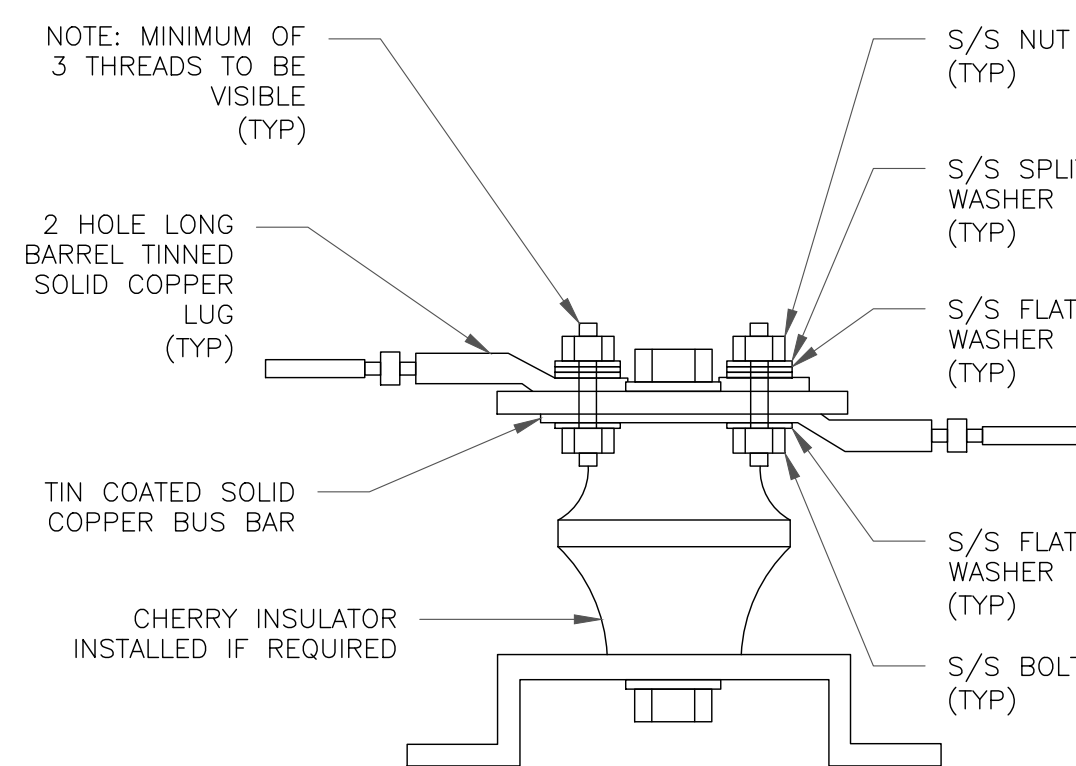

7 LUG DETAIL
SCALE: NOT TO SCALE


| WIRE SIZE | BURNDY LUG | BOLT SIZE |
|------------------------|------------|-----------------------|
| #6 AWG GREEN INSULATED | YA6C-2TC38 | 3/8" - 16 NC S 2 BOLT |
| #2 AWG SOLID TINNED | YA3C-2TC38 | 3/8" - 16 NC S 2 BOLT |
| #2 AWG STRANDED | YA2C-2TC38 | 3/8" - 16 NC S 2 BOLT |
| #2/0 AWG STRANDED | YA26-2TC38 | 3/8" - 16 NC S 2 BOLT |
| #4/0 AWG STRANDED | YA28-2N | 1/2" - 16 NC S 2 BOLT |

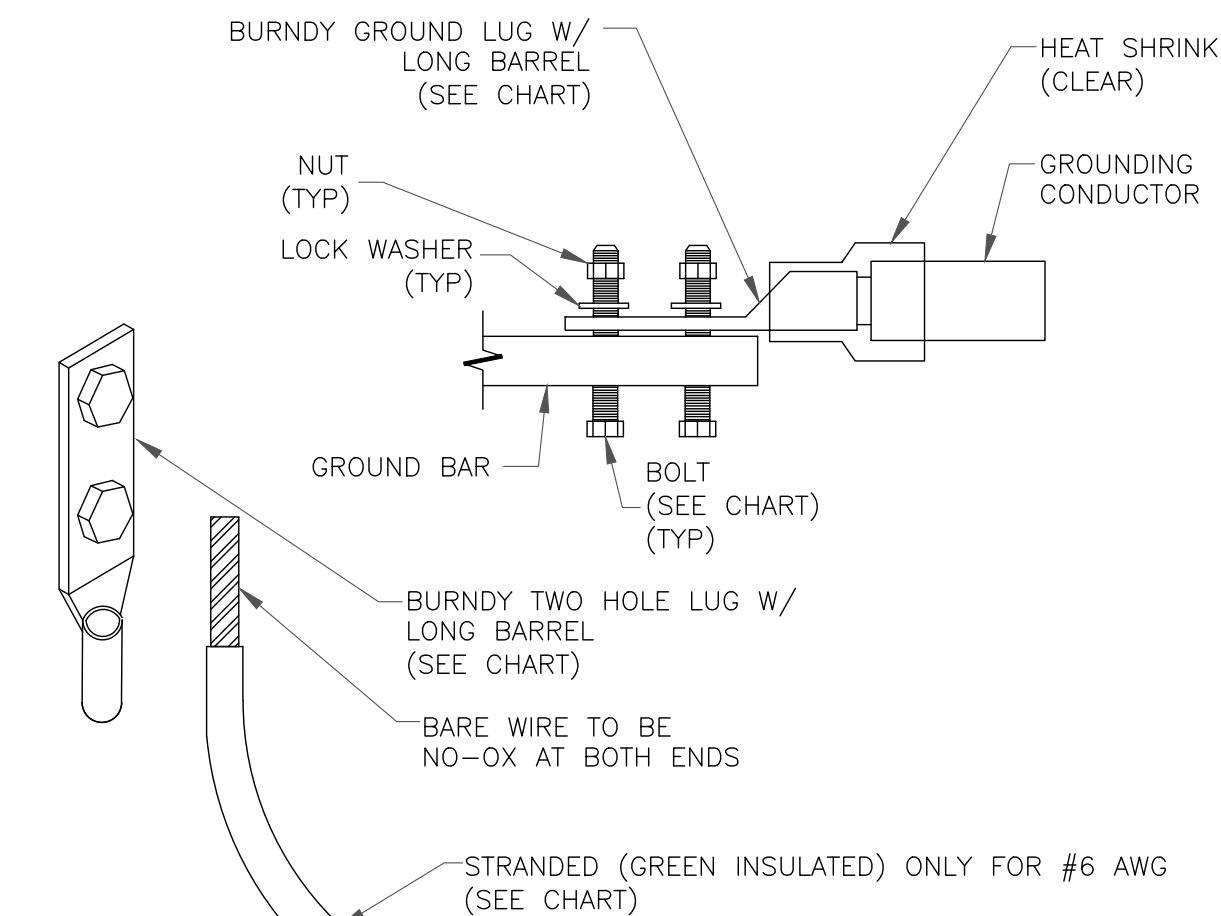


NOTES:

1. ALL GROUNDING LUGS ARE TO BE INSTALLED PER MANUFACTURER'S SPECIFICATIONS. ALL HARDWARE BOLTS, NUTS, LOCK WASHERS SHALL BE STAINLESS STEEL. ALL HARDWARE ARE TO BE AS FOLLOWS: BOLT, FLAT WASHER, GROUND BAR, GROUND LUG, FLAT WASHER AND NUT.

2 MECHANICAL LUG CONNECTION
SCALE: NOT TO SCALE

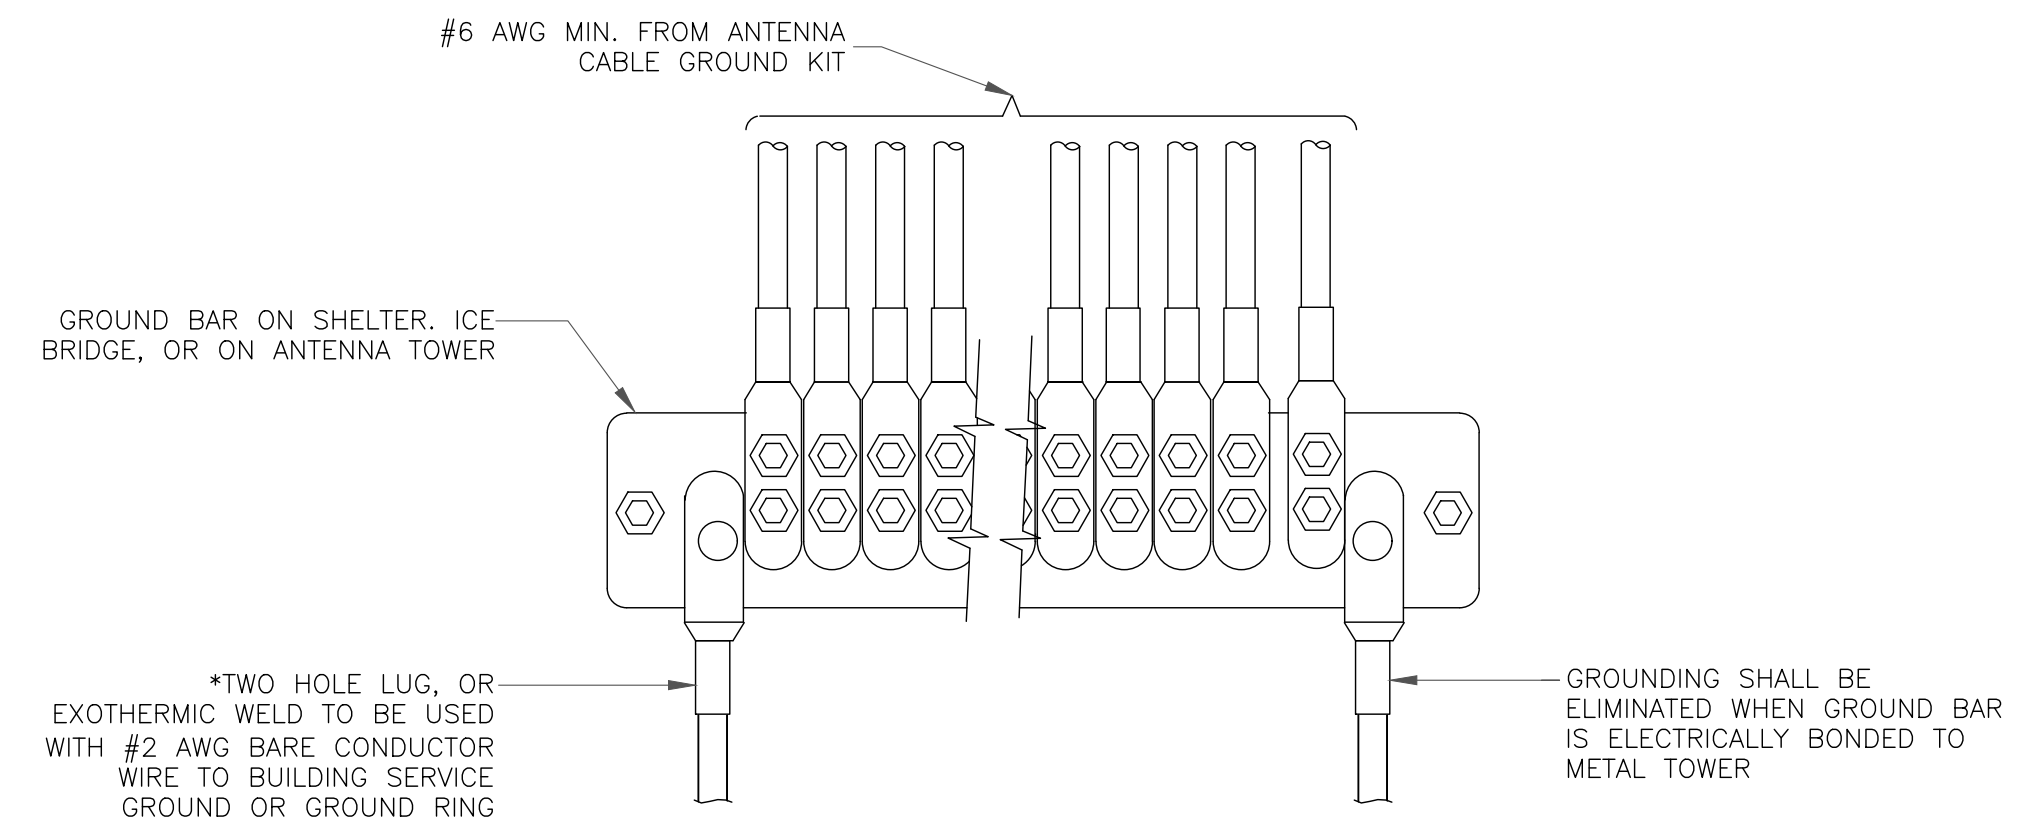

5 GROUNDWIRE INSTALLATION
SCALE: NOT TO SCALE

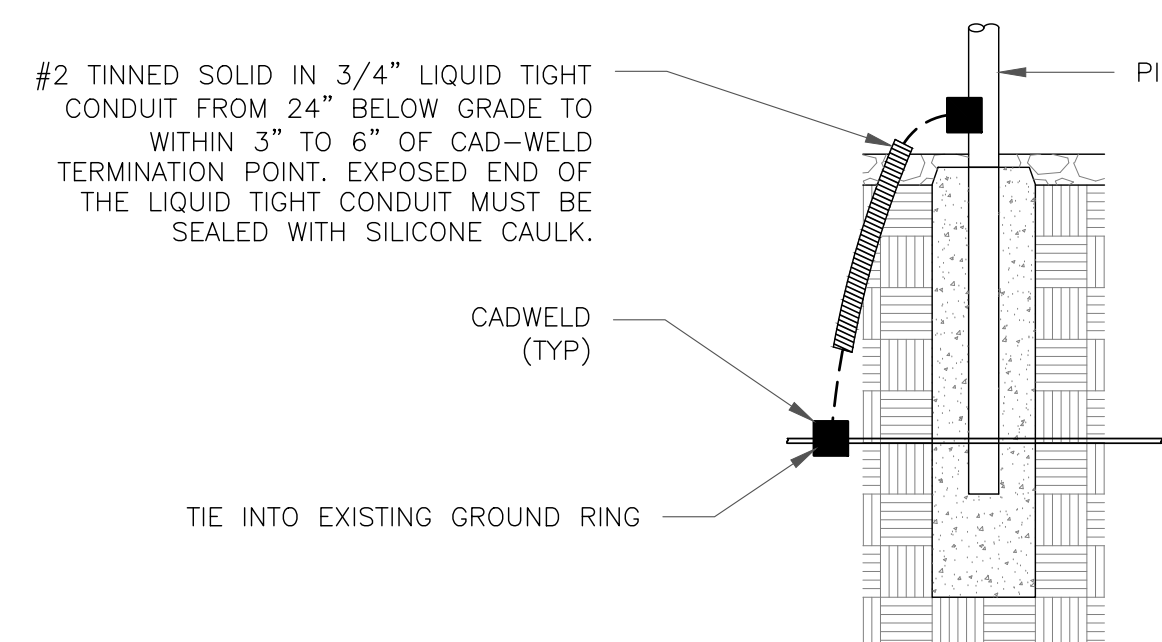

8 TRANSITIONING GROUND DETAIL
SCALE: NOT TO SCALE

verizon
180 WASHINGTON VALLEY ROAD
BEDMINSTER, NJ 07921

CROWN CASTLE
1500 CORPORATE DRIVE
CANONSBURG, PA 15317

INFINIGY
FROM ZERO TO INFINIGY
the solutions are endless
BELLEVUE, WA 98004

VERIZON SITE NUMBER:
468396
BU #: **873645**
OXFORD
691 OXFORD ROAD
OXFORD, CT 06478
EXISTING 150'-0" MONOPOLE

ISSUED FOR:

| REV | DATE | DRWN | DESCRIPTION | DES./QA |
|-----|------------|------|-------------|---------|
| 0 | 06/03/2021 | RCD | FINAL CDs | -- |
| 1 | 07/01/2021 | PEG | FINAL CDs | -- |

STATE OF CONNECTICUT
HUHEI SAKANQUE
34916
LICENSED PROFESSIONAL ENGINEER
7/1/2021

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SHEET NUMBER: **G-2** REVISION: **1**

Exhibit D

Structural Analysis Report

Date: **May 23, 2021**



Tower Engineering Professionals
326 Tryon Road
Raleigh, NC 27603
(919) 661-6351

Subject: Structural Analysis Report

Carrier Designation: **Verizon Wireless Co-Locate**
Site Number: 468396
Site Name: Oxford North CT

Crown Castle Designation: **BU Number:** 873645
Site Name: Oxford
JDE Job Number: 644624
Work Order Number: 1957725
Order Number: 552681 Rev. 0

Engineering Firm Designation: **TEP Project Number:** 217889.549424

Site Data: **691 Oxford Rd, Oxford, New Haven County, CT 06478**
Latitude 41° 26' 49.51", Longitude -73° 9' 8.32"
150 Foot - Monopole Tower

Tower Engineering Professionals is pleased to submit this "**Structural Analysis Report**" to determine the structural integrity of the above-mentioned tower.

The purpose of the analysis is to determine acceptability of the tower stress level. Based on our analysis we have determined the tower stress level for the structure and foundation, under the following load case, to be:

LC5: Proposed Equipment Configuration

Sufficient Capacity - 66.3%

This analysis utilizes an ultimate 3-second gust wind speed of 125 mph as required by the 2015 International Building Code. Applicable Standard references and design criteria are listed in Section 2 - Analysis Criteria.

Structural analysis prepared by: Nicholas Martinez / PHX

Respectfully submitted by:

Aaron T. Rucker, P.E.



Electronic Copy

05/23/2021

TABLE OF CONTENTS

1) INTRODUCTION

2) ANALYSIS CRITERIA

Table 1 - Proposed Equipment Configuration

Table 2 - Other Considered Equipment

3) ANALYSIS PROCEDURE

Table 3 - Documents Provided

3.1) Analysis Method

3.2) Assumptions

4) ANALYSIS RESULTS

Table 4 - Section Capacity (Summary)

Table 5 - Tower Component Stresses vs. Capacity

4.1) Recommendations

5) APPENDIX A

tnxTower Output

6) APPENDIX B

Base Level Drawing

7) APPENDIX C

Additional Calculations

1) INTRODUCTION

This tower is a 150-ft monopole tower designed by Summit.

2) ANALYSIS CRITERIA

| | |
|-----------------------------|-----------|
| TIA-222 Revision: | TIA-222-H |
| Risk Category: | II |
| Wind Speed: | 125 mph |
| Exposure Category: | C |
| Topographic Factor: | 1.0 |
| Ice Thickness: | 1.5 in |
| Wind Speed with Ice: | 50 mph |
| Service Wind Speed: | 60 mph |

Table 1 - Proposed Equipment Configuration

| Mounting Level (ft) | Center Line Elevation (ft) | Number of Antennas | Antenna Manufacturer | Antenna Model | Number of Feed Lines | Feed Line Size (in) |
|---------------------|----------------------------|--------------------|----------------------|------------------------------------|----------------------|---------------------|
| 147.0 | 148.0 | 6 | Antel | LPA-80063/6CF w/ Mount Pipe | 7 | 1-5/8 |
| | | 6 | Commscope | JAHH-65B-R3B w/ Mount Pipe | | |
| | 147.0 | 3 | Vzw | Sub6 Antenna - VZS01 w/ Mount Pipe | | |
| | | 3 | Samsung Telecom. | RFV01U-D1A | | |
| | | 3 | Samsung Telecom. | RFV01U-D2A | | |
| | | 3 | Commscope | CBC78T-DS-43-2X | | |
| | | 1 | Raycap | RHSDC-6627-PF-48 | | |
| | | 3 | Commscope | BSAMNT-SBS-2-2 | | |
| | | 1 | Tower Mounts | Platform Mount [LP 303-1_HR-1] | | |

Table 2 - Other Considered Equipment

| Mounting Level (ft) | Center Line Elevation (ft) | Number of Antennas | Antenna Manufacturer | Antenna Model | Number of Feed Lines | Feed Line Size (in) |
|---------------------|----------------------------|--------------------|-------------------------------|--------------------------------------|----------------------|---------------------|
| 139.0 | 140.0 | 3 | Powerwave Technologies | 7770.00 w/ Mount Pipe | 1 2 12 | 3/8 3/4 1-5/8 |
| | | 4 | Andrew | SBNH-1D6565C w/ Mount Pipe | | |
| | | 2 | KMW Comm. | AM-X-CD-16-65-00T-RET w/ Mount Pipe | | |
| | 139.0 | 3 | Powerwave Technologies | TT19-08BP111-001 | | |
| | | 1 | Raycap | DC6-48-60-18-8F | | |
| | | 3 | Ericsson | RRUS 11 B12 | | |
| | | 3 | Ericsson | RRUS 12 B2 | | |
| | | 1 | Tower Mounts | Platform Mount [LP 1201-1_KCKR-HR-1] | | |
| | 136.0 | 3 | Communication Components Inc. | DTMABP7819VG12A | | |

3) ANALYSIS PROCEDURE

Table 3 - Documents Provided

| Document | Reference | Source |
|-----------------------------|-----------|----------|
| Geotechnical Report | 2134249 | CCISites |
| Tower Foundation Drawings | 1339630 | CCISites |
| Tower Manufacturer Drawings | 1339644 | CCISites |

3.1) Analysis Method

tnxTower (version 8.0.9.0), a commercially available analysis software package, was used to create a three-dimensional model of the tower and calculate member stresses for various loading cases. Selected output from the analysis is included in Appendix A. When applicable, Crown Castle has calculated and provided the effective area for panel antennas using approved methods following the intent of the TIA-222 Standard.

3.2) Assumptions

- 1) The tower and structures were maintained in accordance with the TIA-222 Standard.
- 2) The configuration of antennas, transmission cables, mounts and other appurtenances are as specified in Tables 1 and 2, and the referenced drawings.

This analysis may be affected if any assumptions are not valid or have been made in error. Tower Engineering Professionals should be notified to determine the effect on the structural integrity of the tower.

4) ANALYSIS RESULTS

Table 4 - Section Capacity (Summary)

| Section No. | Elevation (ft) | Component Type | Size | Critical Element | P (k) | ϕP_{allow} (k) | % Capacity | Pass / Fail |
|-------------|----------------|----------------|-----------------------|------------------|--------|----------------------|----------------|-------------|
| L1 | 150 - 110.75 | Pole | TP31.38x24x0.219 | 1 | -10.63 | 1296.90 | 44.2 | Pass |
| L2 | 110.75 - 74.75 | Pole | TP37.711x30.19x0.25 | 2 | -15.92 | 1782.34 | 66.3 | Pass |
| L3 | 74.75 - 39.5 | Pole | TP43.839x36.318x0.313 | 3 | -23.25 | 2588.89 | 64.6 | Pass |
| L4 | 39.5 - 0 | Pole | TP50.64x42.18x0.375 | 4 | -36.07 | 3674.93 | 62.2 | Pass |
| | | | | | | | Summary | |
| | | | | | | Pole (L2) | 66.3 | Pass |
| | | | | | | Rating = | 66.3 | Pass |

Table 5 - Tower Component Stresses vs. Capacity - LC5

| Notes | Component | Elevation (ft) | % Capacity | Pass / Fail |
|-------|----------------------------------|----------------|------------|-------------|
| 1,2 | Anchor Rods | - | 52.9 | Pass |
| 1,2 | Base Plate | - | 45.4 | Pass |
| 1,2 | Base Foundation Soil Interaction | - | 53.9 | Pass |
| 1,2 | Base Foundation Structural | - | 39.4 | Pass |

| | |
|---|--------------|
| Structure Rating (max from all components) = | 66.3% |
|---|--------------|

Notes:


- 1) See additional documentation in "Appendix C - Additional Calculations" for calculations supporting the % capacity listed.
- 2) Rating per TIA-222-H Section 15.5

4.1) Recommendations

- 1) The tower and its foundation have sufficient capacity to carry the proposed load configuration. No modifications are required at this time.

APPENDIX A
TNXTOWER OUTPUT


| | | | | | |
|--------------------|--------|--------|---------|--------|------|
| Section | 1 | 2 | 3 | 4 | 19.9 |
| Length (ft) | 39.25 | 40.00 | 40.00 | 45.00 | |
| Number of Sides | 18 | 18 | 18 | 18 | |
| Thickness (in) | 0.219 | 0.250 | 0.313 | 0.375 | |
| Socket Length (ft) | 4.00 | 4.75 | 5.50 | | |
| Top Dia (in) | 24.000 | 30.190 | 36.318 | 42.180 | |
| Bot Dia (in) | 31.380 | 37.711 | 43.839 | 50.640 | |
| Grade | | | A607-65 | | |
| Weight (K) | 2.5 | 3.6 | 5.4 | 8.4 | |

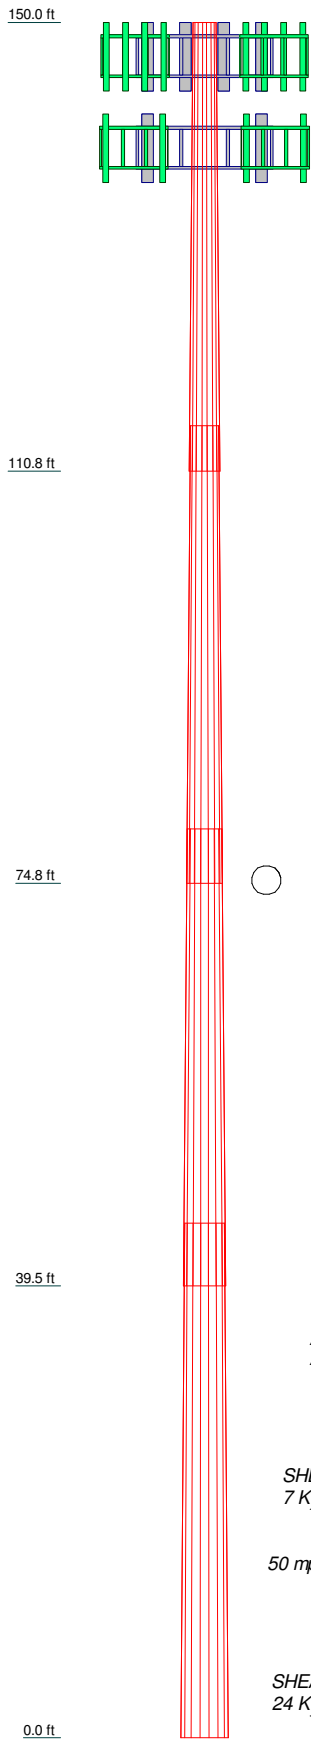

| MATERIAL STRENGTH | | | | | |
|-------------------|--------|--------|-------|----|----|
| GRADE | Fy | Fu | GRADE | Fy | Fu |
| A607-65 | 65 ksi | 80 ksi | | | |

TOWER DESIGN NOTES

1. Tower is located in New Haven County, Connecticut.
2. Tower designed for Exposure C to the TIA-222-H Standard.
3. Tower designed for a 125 mph basic wind in accordance with the TIA-222-H Standard.
4. Tower is also designed for a 50 mph basic wind with 1.50 in ice. Ice is considered to increase in thickness with height.
5. Deflections are based upon a 60 mph wind.
6. Tower Risk Category II.
7. Topographic Category 1 with Crest Height of 0.00 ft
8. TOWER RATING: 66.3%

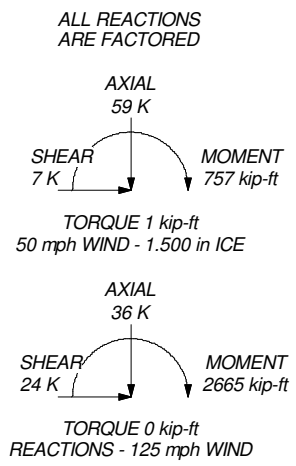

| | | | | | |
|--|--|--|---------------------------------------|----------------|-------------|
|  Tower Engineering Professionals | Tower Engineering Professionals | | Job: Oxford (BU 873645) | | |
| | 326 Tryon Road | | Project: TEP No. 217889.549424 | | |
| | Raleigh, NC 27603 | | Client: Crown Castle | Drawn by: AAS | App'd: |
| | Phone: (919) 661-6351 | | Code: TIA-222-H | Date: 05/23/21 | Scale: NTS |
| | FAX: (919) 661-6350 | | Path: | | Dwg No. E-1 |

| | | |
|--|---|----------------------------------|
| tnxTower Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350 | Job Oxford (BU 873645) | Page 1 of 15 |
| | Project TEP No. 217889.549424 | Date 10:52:36 05/23/21 |
| | Client Crown Castle | Designed by AAS |

Tower Input Data

The tower is a monopole.

This tower is designed using the TIA-222-H standard.

The following design criteria apply:

Tower is located in New Haven County, Connecticut.

Tower base elevation above sea level: 670.00 ft.

Basic wind speed of 125 mph.

Risk Category II.

Exposure Category C.

Simplified Topographic Factor Procedure for wind speed-up calculations is used.

Topographic Category: 1.

Crest Height: 0.00 ft.

Nominal ice thickness of 1.500 in.

Ice thickness is considered to increase with height.

Ice density of 56 pcf.

A wind speed of 50 mph is used in combination with ice.

Temperature drop of 50 °F.

Deflections calculated using a wind speed of 60 mph.

A non-linear (P-delta) analysis was used.

Pressures are calculated at each section.

Stress ratio used in pole design is 1.

Tower analysis based on target reliabilities in accordance with Annex S.

Load Modification Factors used: $K_{es}(F_w) = 0.95$, $K_{es}(t_i) = 0.85$.

Maximum demand-capacity ratio is: 1.05.

Local bending stresses due to climbing loads, feed line supports, and appurtenance mounts are not considered.

Options

| | | |
|--|---|---|
| <ul style="list-style-type: none"> Consider Moments - Legs Consider Moments - Horizontals Consider Moments - Diagonals Use Moment Magnification √ Use Code Stress Ratios √ Use Code Safety Factors - Guys Escalate Ice Always Use Max Kz Use Special Wind Profile Include Bolts In Member Capacity Leg Bolts Are At Top Of Section Secondary Horizontal Braces Leg Use Diamond Inner Bracing (4 Sided) SR Members Have Cut Ends SR Members Are Concentric | <ul style="list-style-type: none"> Distribute Leg Loads As Uniform Assume Legs Pinned √ Assume Rigid Index Plate √ Use Clear Spans For Wind Area Use Clear Spans For KL/r Retension Guys To Initial Tension √ Bypass Mast Stability Checks √ Use Azimuth Dish Coefficients √ Project Wind Area of Appurt. Autocalc Torque Arm Areas Add IBC .6D+W Combination √ Sort Capacity Reports By Component Triangulate Diamond Inner Bracing Treat Feed Line Bundles As Cylinder Ignore KL/ry For 60 Deg. Angle Legs | <ul style="list-style-type: none"> Use ASCE 10 X-Brace Ly Rules Calculate Redundant Bracing Forces Ignore Redundant Members in FEA SR Leg Bolts Resist Compression All Leg Panels Have Same Allowable Offset Girt At Foundation √ Consider Feed Line Torque Include Angle Block Shear Check Use TIA-222-H Bracing Resist. Exemption Use TIA-222-H Tension Splice Exemption <li style="text-align: center;">Poles √ Include Shear-Torsion Interaction Always Use Sub-Critical Flow Use Top Mounted Sockets √ Pole Without Linear Attachments Pole With Shroud Or No Appurtenances Outside and Inside Corner Radii Are Known |
|--|---|---|

| | | |
|--|---|----------------------------------|
| tnxTower Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350 | Job Oxford (BU 873645) | Page 2 of 15 |
| | Project TEP No. 217889.549424 | Date 10:52:36 05/23/21 |
| | Client Crown Castle | Designed by AAS |

Tapered Pole Section Geometry

| Section | Elevation ft | Section Length ft | Splice Length ft | Number of Sides | Top Diameter in | Bottom Diameter in | Wall Thickness in | Bend Radius in | Pole Grade |
|---------|-----------------|----------------------|---------------------|-----------------|--------------------|-----------------------|----------------------|-------------------|---------------------|
| L1 | 150.00-110.75 | 39.25 | 4.000 | 18 | 24.000 | 31.380 | 0.219 | 0.875 | A607-65 (65 ksi) |
| L2 | 110.75-74.75 | 40.00 | 4.750 | 18 | 30.190 | 37.711 | 0.250 | 1.000 | A607-65 (65 ksi) |
| L3 | 74.75-39.50 | 40.00 | 5.500 | 18 | 36.318 | 43.839 | 0.313 | 1.250 | A607-65 (65 ksi) |
| L4 | 39.50-0.00 | 45.00 | | 18 | 42.180 | 50.640 | 0.375 | 1.500 | A607-65 (65 ksi) |

Tapered Pole Properties

| Section | Tip Dia. in | Area in ² | I in ⁴ | r in | C in | I/C in ³ | J in ⁴ | I/Q in ² | w in | w/t |
|---------|----------------|-------------------------|----------------------|---------|---------|------------------------|----------------------|------------------------|---------|--------|
| L1 | 24.336 | 16.512 | 1179.768 | 8.442 | 12.192 | 96.766 | 2361.088 | 8.257 | 3.839 | 17.55 |
| | 31.830 | 21.636 | 2654.221 | 11.062 | 15.941 | 166.502 | 5311.934 | 10.820 | 5.138 | 23.487 |
| L2 | 31.381 | 23.758 | 2690.649 | 10.629 | 15.337 | 175.438 | 5384.839 | 11.881 | 4.874 | 19.494 |
| | 38.254 | 29.725 | 5270.144 | 13.299 | 19.157 | 275.100 | 10547.223 | 14.865 | 6.197 | 24.789 |
| L3 | 37.737 | 35.713 | 5849.225 | 12.782 | 18.450 | 317.040 | 11706.147 | 17.860 | 5.842 | 18.694 |
| | 44.467 | 43.173 | 10333.695 | 15.452 | 22.270 | 464.014 | 20680.987 | 21.591 | 7.166 | 22.93 |
| L4 | 43.823 | 49.758 | 10986.408 | 14.841 | 21.427 | 512.728 | 21987.273 | 24.884 | 6.764 | 18.036 |
| | 51.363 | 59.828 | 19097.332 | 17.844 | 25.725 | 742.361 | 38219.793 | 29.920 | 8.253 | 22.007 |

| Tower Elevation ft | Gusset Area (per face) ft ² | Gusset Thickness in | Gusset Grade | Adjust. Factor A _f | Adjust. Factor A _r | Weight Mult. | Double Angle Stitch Bolt Spacing Diagonals in | Double Angle Stitch Bolt Spacing Horizontals in | Double Angle Stitch Bolt Spacing Redundants in |
|-----------------------|--|------------------------|--------------|----------------------------------|----------------------------------|--------------|---|---|--|
| L1 150.00-110.75 | | | | 1 | 1 | 1 | | | |
| L2 110.75-74.75 | | | | 1 | 1 | 1 | | | |
| L3 74.75-39.50 | | | | 1 | 1 | 1 | | | |
| L4 39.50-0.00 | | | | 1 | 1 | 1 | | | |

Feed Line/Linear Appurtenances - Entered As Round Or Flat

| Description | Face or Leg | Allow Shield | Exclude From Torque Calculation | Component Type | Placement ft | Total Number | Number Per Row | Clear Spacing in | Width or Diameter in | Perimeter in | Weight plf |
|-------------|-------------|--------------|---------------------------------|----------------|-----------------|--------------|----------------|---------------------|-------------------------|-----------------|---------------|
| *** | | | | | | | | | | | |
| *** | | | | | | | | | | | |

Feed Line/Linear Appurtenances - Entered As Area

| | | | | |
|--|----------------|-----------------------|--------------------|-------------------|
| tnxTower Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350 | Job | Oxford (BU 873645) | Page | 3 of 15 |
| | Project | TEP No. 217889.549424 | Date | 10:52:36 05/23/21 |
| | Client | Crown Castle | Designed by | AAS |

| Description | Face or Leg | Allow Shield | Exclude From Torque Calculation | Component Type | Placement ft | Total Number | | C _{AA} ft ² /ft | Weight plf |
|---|-------------|--------------|---------------------------------|--------------------|---------------|--------------|----------|-------------------------------------|------------|
| Step Pegs (5/8" SR) 7-in. w/30" step | C | No | No | CaAa (Out Of Face) | 150.00 - 0.00 | 1 | No Ice | 0.03 | 0.487 |
| | | | | | | | 1/2" Ice | 0.14 | 1.006 |
| | | | | | | | 1" Ice | 0.23 | 2.065 |
| | | | | | | | 2" Ice | 0.43 | 6.087 |
| Safety Line 3/8 | C | No | No | CaAa (Out Of Face) | 150.00 - 0.00 | 1 | No Ice | 0.04 | 0.220 |
| | | | | | | | 1/2" Ice | 0.14 | 0.750 |
| | | | | | | | 1" Ice | 0.24 | 1.280 |
| | | | | | | | 2" Ice | 0.44 | 2.340 |
| **147** AVA7-50(1-5/8) | A | No | No | Inside Pole | 147.00 - 0.00 | 6 | No Ice | 0.00 | 0.700 |
| | | | | | | | 1/2" Ice | 0.00 | 0.700 |
| | | | | | | | 1" Ice | 0.00 | 0.700 |
| | | | | | | | 2" Ice | 0.00 | 0.700 |
| HB158-U12S24-XX X-LI(1-5/8) | A | No | No | Inside Pole | 147.00 - 0.00 | 1 | No Ice | 0.00 | 3.200 |
| | | | | | | | 1/2" Ice | 0.00 | 3.200 |
| | | | | | | | 1" Ice | 0.00 | 3.200 |
| | | | | | | | 2" Ice | 0.00 | 3.200 |
| **139** LCF158-50JA-A0(1-5/8) | B | No | No | Inside Pole | 139.00 - 0.00 | 12 | No Ice | 0.00 | 0.800 |
| | | | | | | | 1/2" Ice | 0.00 | 0.800 |
| | | | | | | | 1" Ice | 0.00 | 0.800 |
| | | | | | | | 2" Ice | 0.00 | 0.800 |
| FB-L98B-034-XXX(3/8) | B | No | No | Inside Pole | 139.00 - 0.00 | 1 | No Ice | 0.00 | 0.057 |
| | | | | | | | 1/2" Ice | 0.00 | 0.057 |
| | | | | | | | 1" Ice | 0.00 | 0.057 |
| | | | | | | | 2" Ice | 0.00 | 0.057 |
| WR-VG86ST-BRD(3/4) | B | No | No | Inside Pole | 139.00 - 0.00 | 2 | No Ice | 0.00 | 0.584 |
| | | | | | | | 1/2" Ice | 0.00 | 0.584 |
| | | | | | | | 1" Ice | 0.00 | 0.584 |
| | | | | | | | 2" Ice | 0.00 | 0.584 |
| 2" Rigid Conduit | B | No | No | Inside Pole | 139.00 - 0.00 | 1 | No Ice | 0.00 | 2.800 |
| | | | | | | | 1/2" Ice | 0.00 | 2.800 |
| | | | | | | | 1" Ice | 0.00 | 2.800 |
| | | | | | | | 2" Ice | 0.00 | 2.800 |
| *** | | | | | | | | | |
| *** | | | | | | | | | |

Feed Line/Linear Appurtenances Section Areas

| Tower Section | Tower Elevation ft | Face | A _R ft ² | A _F ft ² | C _{AA} In Face ft ² | C _{AA} Out Face ft ² | Weight K |
|---------------|--------------------|------|--------------------------------|--------------------------------|---|--|----------|
| L1 | 150.00-110.75 | A | 0.000 | 0.000 | 0.000 | 0.000 | 0.27 |
| | | B | 0.000 | 0.000 | 0.000 | 0.000 | 0.38 |
| | | C | 0.000 | 0.000 | 0.000 | 2.846 | 0.03 |
| L2 | 110.75-74.75 | A | 0.000 | 0.000 | 0.000 | 0.000 | 0.27 |
| | | B | 0.000 | 0.000 | 0.000 | 0.000 | 0.49 |
| | | C | 0.000 | 0.000 | 0.000 | 2.610 | 0.03 |
| L3 | 74.75-39.50 | A | 0.000 | 0.000 | 0.000 | 0.000 | 0.26 |
| | | B | 0.000 | 0.000 | 0.000 | 0.000 | 0.48 |
| | | C | 0.000 | 0.000 | 0.000 | 2.556 | 0.02 |
| L4 | 39.50-0.00 | A | 0.000 | 0.000 | 0.000 | 0.000 | 0.29 |
| | | B | 0.000 | 0.000 | 0.000 | 0.000 | 0.54 |
| | | C | 0.000 | 0.000 | 0.000 | 2.864 | 0.03 |

| | | | | |
|--|----------------|-----------------------|--------------------|-------------------|
| tnxTower Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350 | Job | Oxford (BU 873645) | Page | 4 of 15 |
| | Project | TEP No. 217889.549424 | Date | 10:52:36 05/23/21 |
| | Client | Crown Castle | Designed by | AAS |

Feed Line/Linear Appurtenances Section Areas - With Ice

| Tower Section | Tower Elevation ft | Face or Leg | Ice Thickness in | A _R ft ² | A _F ft ² | C _{AA} In Face ft ² | C _{AA} Out Face ft ² | Weight K |
|---------------|-----------------------|-------------|---------------------|-----------------------------------|-----------------------------------|---|--|-------------|
| L1 | 150.00-110.75 | A | 1.462 | 0.000 | 0.000 | 0.000 | 0.000 | 0.27 |
| | | B | | 0.000 | 0.000 | 0.000 | 0.000 | 0.38 |
| | | C | | 0.000 | 0.000 | 0.000 | 25.798 | 0.22 |
| L2 | 110.75-74.75 | A | 1.413 | 0.000 | 0.000 | 0.000 | 0.000 | 0.27 |
| | | B | | 0.000 | 0.000 | 0.000 | 0.000 | 0.49 |
| | | C | | 0.000 | 0.000 | 0.000 | 23.662 | 0.20 |
| L3 | 74.75-39.50 | A | 1.346 | 0.000 | 0.000 | 0.000 | 0.000 | 0.26 |
| | | B | | 0.000 | 0.000 | 0.000 | 0.000 | 0.48 |
| | | C | | 0.000 | 0.000 | 0.000 | 22.481 | 0.19 |
| L4 | 39.50-0.00 | A | 1.212 | 0.000 | 0.000 | 0.000 | 0.000 | 0.29 |
| | | B | | 0.000 | 0.000 | 0.000 | 0.000 | 0.54 |
| | | C | | 0.000 | 0.000 | 0.000 | 24.138 | 0.20 |

Feed Line Center of Pressure

| Section | Elevation ft | CP _X in | CP _Z in | CP _X Ice in | CP _Z Ice in |
|---------|-----------------|-----------------------|-----------------------|------------------------------|------------------------------|
| L1 | 150.00-110.75 | -0.562 | 0.324 | -2.252 | 1.300 |
| L2 | 110.75-74.75 | -0.567 | 0.327 | -2.378 | 1.373 |
| L3 | 74.75-39.50 | -0.570 | 0.329 | -2.406 | 1.389 |
| L4 | 39.50-0.00 | -0.573 | 0.331 | -2.390 | 1.380 |

Note: For pole sections, center of pressure calculations do not consider feed line shielding.

Discrete Tower Loads

| Description | Face or Leg | Offset Type | Offsets: Horz Lateral Vert ft ft ft | Azimuth Adjustment ° | Placement ft | C _{AA} Front ft ² | C _{AA} Side ft ² | Weight K | |
|---|-------------|---------------------------|---|-------------------------|-----------------|---|--|-------------|------|
| Lighting Rod 1/2" x 2' | C | None | | 0.000 | 150.00 | No Ice | 0.10 | 0.10 | 0.02 |
| | | | | | | 1/2" Ice | 0.26 | 0.26 | 0.02 |
| | | | | | | 1" Ice | 0.40 | 0.40 | 0.02 |
| | | | | | | 2" Ice | 0.68 | 0.68 | 0.03 |
| **147** (2) LPA-80063/6CF w/ Mount Pipe | A | From Centroid-Fa ce | 4.00 0.000 1.000 | 0.000 | 147.00 | No Ice | 10.06 | 10.45 | 0.06 |
| | | | | | | 1/2" Ice | 10.75 | 11.74 | 0.15 |
| | | | | | | 1" Ice | 11.40 | 12.87 | 0.25 |
| | | | | | | 2" Ice | 12.62 | 14.82 | 0.49 |
| (2) LPA-80063/6CF w/ Mount Pipe | B | From Centroid-Fa | 4.00 0.000 | 0.000 | 147.00 | No Ice | 10.06 | 10.45 | 0.06 |
| | | | | | | 1/2" Ice | 10.75 | 11.74 | 0.15 |

| | | | | |
|--|----------------|-----------------------|--------------------|-------------------|
| tnxTower Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350 | Job | Oxford (BU 873645) | Page | 5 of 15 |
| | Project | TEP No. 217889.549424 | Date | 10:52:36 05/23/21 |
| | Client | Crown Castle | Designed by | AAS |

| Description | Face or Leg | Offset Type | Offsets: | | Azimuth Adjustment | Placement | C _{AA} Front | C _{AA} Side | Weight | |
|------------------------------------|-------------|--------------------|----------|------|--------------------|-----------|-----------------------|----------------------|--------|------|
| | | | Horz | Vert | | | | | | |
| | | | ft | ft | ° | ft | ft ² | ft ² | K | |
| | | ce | 1.000 | | | | | | | |
| (2) LPA-80063/6CF w/ Mount Pipe | C | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 11.40 | 12.87 | 0.25 |
| | | | 0.000 | | | | 2" Ice | 12.62 | 14.82 | 0.49 |
| | | | 1.000 | | | | No Ice | 10.06 | 10.45 | 0.06 |
| | | | | | | | 1/2" Ice | 10.75 | 11.74 | 0.15 |
| (2) JAHH-65B-R3B w/ Mount Pipe | A | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 11.40 | 12.87 | 0.25 |
| | | | 0.000 | | | | 2" Ice | 12.62 | 14.82 | 0.49 |
| | | | 1.000 | | | | No Ice | 5.50 | 4.38 | 0.10 |
| | | | | | | | 1/2" Ice | 5.97 | 4.84 | 0.17 |
| (2) JAHH-65B-R3B w/ Mount Pipe | B | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 6.45 | 5.30 | 0.25 |
| | | | 0.000 | | | | 2" Ice | 7.44 | 6.26 | 0.46 |
| | | | 1.000 | | | | No Ice | 5.50 | 4.38 | 0.10 |
| | | | | | | | 1/2" Ice | 5.97 | 4.84 | 0.17 |
| (2) JAHH-65B-R3B w/ Mount Pipe | C | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 6.45 | 5.30 | 0.25 |
| | | | 0.000 | | | | 2" Ice | 7.44 | 6.26 | 0.46 |
| | | | 1.000 | | | | No Ice | 5.50 | 4.38 | 0.10 |
| | | | | | | | 1/2" Ice | 5.97 | 4.84 | 0.17 |
| Sub6 Antenna - VZS01 w/ Mount Pipe | A | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 6.45 | 5.30 | 0.25 |
| | | | 0.000 | | | | 2" Ice | 7.44 | 6.26 | 0.46 |
| | | | 0.000 | | | | No Ice | 4.92 | 2.69 | 0.10 |
| | | | | | | | 1/2" Ice | 5.26 | 3.15 | 0.14 |
| Sub6 Antenna - VZS01 w/ Mount Pipe | B | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 5.62 | 3.63 | 0.19 |
| | | | 0.000 | | | | 2" Ice | 6.37 | 4.64 | 0.29 |
| | | | 0.000 | | | | No Ice | 4.92 | 2.69 | 0.10 |
| | | | | | | | 1/2" Ice | 5.26 | 3.15 | 0.14 |
| Sub6 Antenna - VZS01 w/ Mount Pipe | C | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 5.62 | 3.63 | 0.19 |
| | | | 0.000 | | | | 2" Ice | 6.37 | 4.64 | 0.29 |
| | | | 0.000 | | | | No Ice | 4.92 | 2.69 | 0.10 |
| | | | | | | | 1/2" Ice | 5.26 | 3.15 | 0.14 |
| RFV01U-D1A | A | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 5.62 | 3.63 | 0.19 |
| | | | 0.000 | | | | 2" Ice | 6.37 | 4.64 | 0.29 |
| | | | 0.000 | | | | No Ice | 1.88 | 1.25 | 0.08 |
| | | | | | | | 1/2" Ice | 2.05 | 1.39 | 0.10 |
| RFV01U-D1A | B | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 2.22 | 1.54 | 0.12 |
| | | | 0.000 | | | | 2" Ice | 2.60 | 1.86 | 0.18 |
| | | | 0.000 | | | | No Ice | 1.88 | 1.25 | 0.08 |
| | | | | | | | 1/2" Ice | 2.05 | 1.39 | 0.10 |
| RFV01U-D1A | C | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 2.22 | 1.54 | 0.12 |
| | | | 0.000 | | | | 2" Ice | 2.60 | 1.86 | 0.18 |
| | | | 0.000 | | | | No Ice | 1.88 | 1.25 | 0.08 |
| | | | | | | | 1/2" Ice | 2.05 | 1.39 | 0.10 |
| RFV01U-D2A | A | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 2.22 | 1.54 | 0.12 |
| | | | 0.000 | | | | 2" Ice | 2.60 | 1.86 | 0.18 |
| | | | 0.000 | | | | No Ice | 1.88 | 1.01 | 0.07 |
| | | | | | | | 1/2" Ice | 2.05 | 1.14 | 0.09 |
| RFV01U-D2A | B | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 2.22 | 1.28 | 0.11 |
| | | | 0.000 | | | | 2" Ice | 2.60 | 1.59 | 0.15 |
| | | | 0.000 | | | | No Ice | 1.88 | 1.01 | 0.07 |
| | | | | | | | 1/2" Ice | 2.05 | 1.14 | 0.09 |
| RFV01U-D2A | C | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 2.22 | 1.28 | 0.11 |
| | | | 0.000 | | | | 2" Ice | 2.60 | 1.59 | 0.15 |
| | | | 0.000 | | | | No Ice | 1.88 | 1.01 | 0.07 |
| | | | | | | | 1/2" Ice | 2.05 | 1.14 | 0.09 |
| CBC78T-DS-43-2X | A | From Centroid-Face | 4.00 | | 0.000 | 147.00 | 1" Ice | 2.22 | 1.28 | 0.11 |
| | | | 0.000 | | | | 2" Ice | 2.60 | 1.59 | 0.15 |
| | | | 0.000 | | | | No Ice | 0.37 | 0.51 | 0.02 |
| | | | | | | | 1/2" Ice | 0.45 | 0.60 | 0.03 |
| | | | | | | 1" Ice | 0.53 | 0.70 | 0.04 | |

| | | | | |
|--|----------------|-----------------------|--------------------|-------------------|
| tnxTower Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350 | Job | Oxford (BU 873645) | Page | 6 of 15 |
| | Project | TEP No. 217889.549424 | Date | 10:52:36 05/23/21 |
| | Client | Crown Castle | Designed by | AAS |

| Description | Face or Leg | Offset Type | Offsets: | | Azimuth Adjustment | Placement | C _{AA} Front | C _{AA} Side | Weight | |
|---|-------------|--------------------|----------|---------|--------------------|-----------|-----------------------|----------------------|--------|------|
| | | | Horz | Lateral | | | | | | Vert |
| CBC78T-DS-43-2X | B | From Centroid-Face | 4.00 | 0.000 | 0.000 | 147.00 | 2" Ice | 0.72 | 0.93 | 0.06 |
| | | | | | | | No Ice | 0.37 | 0.51 | 0.02 |
| | | | | | | | 1/2" Ice | 0.45 | 0.60 | 0.03 |
| | | | | | | | 1" Ice | 0.53 | 0.70 | 0.04 |
| CBC78T-DS-43-2X | C | From Centroid-Face | 4.00 | 0.000 | 0.000 | 147.00 | 2" Ice | 0.72 | 0.93 | 0.06 |
| | | | | | | | No Ice | 0.37 | 0.51 | 0.02 |
| | | | | | | | 1/2" Ice | 0.45 | 0.60 | 0.03 |
| | | | | | | | 1" Ice | 0.53 | 0.70 | 0.04 |
| RHSDC-6627-PF-48 | B | From Centroid-Face | 4.00 | 0.000 | 0.000 | 147.00 | 2" Ice | 0.72 | 0.93 | 0.06 |
| | | | | | | | No Ice | 4.06 | 3.10 | 0.03 |
| | | | | | | | 1/2" Ice | 4.32 | 3.34 | 0.07 |
| | | | | | | | 1" Ice | 4.58 | 3.58 | 0.11 |
| Platform Mount [LP 303-1_HR-1] | C | None | | | 0.000 | 147.00 | 2" Ice | 5.14 | 4.09 | 0.20 |
| | | | | | | | No Ice | 17.09 | 17.09 | 1.50 |
| | | | | | | | 1/2" Ice | 21.47 | 21.47 | 1.88 |
| | | | | | | | 1" Ice | 25.72 | 25.72 | 2.35 |
| **139** | | | | | | | | | | |
| 7770.00 w/ Mount Pipe | A | From Centroid-Leg | 4.00 | 0.000 | 0.000 | 139.00 | 2" Ice | 33.96 | 33.96 | 3.52 |
| | | | | | | | No Ice | 5.75 | 4.25 | 0.06 |
| | | | | | | | 1/2" Ice | 6.18 | 5.01 | 0.10 |
| | | | | | | | 1" Ice | 6.61 | 5.71 | 0.16 |
| 7770.00 w/ Mount Pipe | B | From Centroid-Leg | 4.00 | 0.000 | 0.000 | 139.00 | 2" Ice | 7.49 | 7.16 | 0.29 |
| | | | | | | | No Ice | 5.75 | 4.25 | 0.06 |
| | | | | | | | 1/2" Ice | 6.18 | 5.01 | 0.10 |
| | | | | | | | 1" Ice | 6.61 | 5.71 | 0.16 |
| 7770.00 w/ Mount Pipe | C | From Centroid-Leg | 4.00 | 0.000 | 0.000 | 139.00 | 2" Ice | 7.49 | 7.16 | 0.29 |
| | | | | | | | No Ice | 5.75 | 4.25 | 0.06 |
| | | | | | | | 1/2" Ice | 6.18 | 5.01 | 0.10 |
| | | | | | | | 1" Ice | 6.61 | 5.71 | 0.16 |
| (2) SBNH-1D6565C w/ Mount Pipe | A | From Centroid-Leg | 4.00 | 0.000 | 0.000 | 139.00 | 2" Ice | 7.49 | 7.16 | 0.29 |
| | | | | | | | No Ice | 5.56 | 4.47 | 0.08 |
| | | | | | | | 1/2" Ice | 6.07 | 4.97 | 0.17 |
| | | | | | | | 1" Ice | 6.59 | 5.47 | 0.26 |
| (2) SBNH-1D6565C w/ Mount Pipe | B | From Centroid-Leg | 4.00 | 0.000 | 0.000 | 139.00 | 2" Ice | 7.65 | 6.52 | 0.50 |
| | | | | | | | No Ice | 5.56 | 4.47 | 0.08 |
| | | | | | | | 1/2" Ice | 6.07 | 4.97 | 0.17 |
| | | | | | | | 1" Ice | 6.59 | 5.47 | 0.26 |
| (2) AM-X-CD-16-65-00T-RET w/ Mount Pipe | C | From Centroid-Leg | 4.00 | 0.000 | 0.000 | 139.00 | 2" Ice | 7.65 | 6.52 | 0.50 |
| | | | | | | | No Ice | 4.63 | 3.27 | 0.07 |
| | | | | | | | 1/2" Ice | 5.06 | 3.69 | 0.13 |
| | | | | | | | 1" Ice | 5.51 | 4.12 | 0.20 |
| TT19-08BP111-001 | A | From Centroid-Leg | 4.00 | 0.000 | 0.000 | 139.00 | 2" Ice | 6.43 | 5.00 | 0.38 |
| | | | | | | | No Ice | 0.55 | 0.45 | 0.02 |
| | | | | | | | 1/2" Ice | 0.65 | 0.53 | 0.02 |
| | | | | | | | 1" Ice | 0.75 | 0.63 | 0.03 |
| TT19-08BP111-001 | B | From Centroid-Leg | 4.00 | 0.000 | 0.000 | 139.00 | 2" Ice | 0.98 | 0.84 | 0.05 |
| | | | | | | | No Ice | 0.55 | 0.45 | 0.02 |
| | | | | | | | 1/2" Ice | 0.65 | 0.53 | 0.02 |
| | | | | | | | 1" Ice | 0.75 | 0.63 | 0.03 |
| TT19-08BP111-001 | C | From Centroid-Leg | 4.00 | 0.000 | 0.000 | 139.00 | 2" Ice | 0.98 | 0.84 | 0.05 |
| | | | | | | | No Ice | 0.55 | 0.45 | 0.02 |
| | | | | | | | 1/2" Ice | 0.65 | 0.53 | 0.02 |
| | | | | | | | 1" Ice | 0.75 | 0.63 | 0.03 |
| DC6-48-60-18-8F | A | From Centroid-Leg | 4.00 | 0.000 | 0.000 | 139.00 | 2" Ice | 0.98 | 0.84 | 0.05 |
| | | | | | | | No Ice | 1.21 | 1.21 | 0.03 |
| | | | | | | | 1/2" Ice | 1.89 | 1.89 | 0.05 |
| | | | | | | | 1" Ice | 2.11 | 2.11 | 0.08 |

| | | | | |
|--|----------------|-----------------------|--------------------|-------------------|
| tnxTower Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350 | Job | Oxford (BU 873645) | Page | 7 of 15 |
| | Project | TEP No. 217889.549424 | Date | 10:52:36 05/23/21 |
| | Client | Crown Castle | Designed by | AAS |

| Description | Face or Leg | Offset Type | Offsets: | | Azimuth Adjustment | Placement | C _{AA} Front | C _{AA} Side | Weight | |
|--------------------------------------|-------------|--------------------|----------|--------|--------------------|-----------|-----------------------|----------------------|--------|------|
| | | | Horz | Vert | | | | | | |
| | | | ft | ft | ° | ft | ft ² | ft ² | K | |
| RRUS 12 B2 | A | From Centroid-Le g | 4.00 | 0.000 | 0.000 | 139.00 | 2" Ice | 2.57 | 2.57 | 0.14 |
| | | | 0.000 | 0.000 | | | No Ice | 3.15 | 1.29 | 0.05 |
| | | | 0.000 | 0.000 | | | 1/2" Ice | 3.36 | 1.44 | 0.07 |
| | | | 0.000 | 0.000 | | | 1" Ice | 3.59 | 1.60 | 0.10 |
| | | | 0.000 | 0.000 | | | 2" Ice | 4.07 | 1.95 | 0.16 |
| RRUS 12 B2 | B | From Centroid-Le g | 4.00 | 0.000 | 0.000 | 139.00 | No Ice | 3.15 | 1.29 | 0.05 |
| | | | 0.000 | 0.000 | | | 1/2" Ice | 3.36 | 1.44 | 0.07 |
| | | | 0.000 | 0.000 | | | 1" Ice | 3.59 | 1.60 | 0.10 |
| | | | 0.000 | 0.000 | | | 2" Ice | 4.07 | 1.95 | 0.16 |
| | | | 0.000 | 0.000 | | | No Ice | 3.15 | 1.29 | 0.05 |
| RRUS 12 B2 | C | From Centroid-Le g | 4.00 | 0.000 | 0.000 | 139.00 | 1/2" Ice | 3.36 | 1.44 | 0.07 |
| | | | 0.000 | 0.000 | | | 1" Ice | 3.59 | 1.60 | 0.10 |
| | | | 0.000 | 0.000 | | | 2" Ice | 4.07 | 1.95 | 0.16 |
| | | | 0.000 | 0.000 | | | No Ice | 3.15 | 1.29 | 0.05 |
| | | | 0.000 | 0.000 | | | 1/2" Ice | 3.36 | 1.44 | 0.07 |
| RRUS 11 B12 | A | From Centroid-Le g | 4.00 | 0.000 | 0.000 | 139.00 | 1" Ice | 3.59 | 1.60 | 0.10 |
| | | | 0.000 | 0.000 | | | 2" Ice | 4.07 | 1.95 | 0.16 |
| | | | 0.000 | 0.000 | | | No Ice | 2.79 | 1.19 | 0.05 |
| | | | 0.000 | 0.000 | | | 1/2" Ice | 3.00 | 1.34 | 0.07 |
| | | | 0.000 | 0.000 | | | 1" Ice | 3.21 | 1.50 | 0.10 |
| RRUS 11 B12 | B | From Centroid-Le g | 4.00 | 0.000 | 0.000 | 139.00 | 2" Ice | 3.67 | 1.84 | 0.15 |
| | | | 0.000 | 0.000 | | | No Ice | 2.79 | 1.19 | 0.05 |
| | | | 0.000 | 0.000 | | | 1/2" Ice | 3.00 | 1.34 | 0.07 |
| | | | 0.000 | 0.000 | | | 1" Ice | 3.21 | 1.50 | 0.10 |
| | | | 0.000 | 0.000 | | | 2" Ice | 3.67 | 1.84 | 0.15 |
| RRUS 11 B12 | C | From Centroid-Le g | 4.00 | 0.000 | 0.000 | 139.00 | No Ice | 2.79 | 1.19 | 0.05 |
| | | | 0.000 | 0.000 | | | 1/2" Ice | 3.00 | 1.34 | 0.07 |
| | | | 0.000 | 0.000 | | | 1" Ice | 3.21 | 1.50 | 0.10 |
| | | | 0.000 | 0.000 | | | 2" Ice | 3.67 | 1.84 | 0.15 |
| | | | 0.000 | 0.000 | | | No Ice | 2.79 | 1.19 | 0.05 |
| DTMABP7819VG12A | A | From Centroid-Le g | 4.00 | 0.000 | 0.000 | 139.00 | 1/2" Ice | 1.10 | 0.42 | 0.03 |
| | | | 0.000 | -3.000 | | | 1" Ice | 1.23 | 0.51 | 0.04 |
| | | | 0.000 | -3.000 | | | 2" Ice | 1.52 | 0.71 | 0.06 |
| | | | 0.000 | -3.000 | | | No Ice | 0.98 | 0.34 | 0.02 |
| | | | 0.000 | -3.000 | | | 1/2" Ice | 1.10 | 0.42 | 0.03 |
| DTMABP7819VG12A | B | From Centroid-Le g | 4.00 | 0.000 | 0.000 | 139.00 | 1" Ice | 1.23 | 0.51 | 0.04 |
| | | | 0.000 | -3.000 | | | 2" Ice | 1.52 | 0.71 | 0.06 |
| | | | 0.000 | -3.000 | | | No Ice | 0.98 | 0.34 | 0.02 |
| | | | 0.000 | -3.000 | | | 1/2" Ice | 1.10 | 0.42 | 0.03 |
| | | | 0.000 | -3.000 | | | 1" Ice | 1.23 | 0.51 | 0.04 |
| DTMABP7819VG12A | C | From Centroid-Le g | 4.00 | 0.000 | 0.000 | 139.00 | 2" Ice | 1.52 | 0.71 | 0.06 |
| | | | 0.000 | -3.000 | | | No Ice | 0.98 | 0.34 | 0.02 |
| | | | 0.000 | -3.000 | | | 1/2" Ice | 1.10 | 0.42 | 0.03 |
| | | | 0.000 | -3.000 | | | 1" Ice | 1.23 | 0.51 | 0.04 |
| | | | 0.000 | -3.000 | | | 2" Ice | 1.52 | 0.71 | 0.06 |
| Platform Mount [LP 1201-1_KCKR-HR-1] | C | None | | 0.000 | 0.000 | 139.00 | No Ice | 37.61 | 37.61 | 2.63 |
| | | | | | | | 1/2" Ice | 45.62 | 45.62 | 3.48 |
| | | | | | | | 1" Ice | 53.59 | 53.59 | 4.46 |
| | | | | | | | 2" Ice | 69.65 | 69.65 | 6.85 |
| *** | | | | | | | | | | |
| *** | | | | | | | | | | |

Load Combinations

| Comb. No. | Description |
|-----------|----------------------------------|
| 1 | Dead Only |
| 2 | 1.2 Dead+1.0 Wind 0 deg - No Ice |
| 3 | 0.9 Dead+1.0 Wind 0 deg - No Ice |

| | | |
|---|--|---|
| <p>tnxTower</p> <p>Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350</p> | <p>Job</p> <p>Oxford (BU 873645)</p> | <p>Page</p> <p>8 of 15</p> |
| | <p>Project</p> <p>TEP No. 217889.549424</p> | <p>Date</p> <p>10:52:36 05/23/21</p> |
| | <p>Client</p> <p>Crown Castle</p> | <p>Designed by</p> <p>AAS</p> |

| Comb. No. | Description |
|-----------|--|
| 4 | 1.2 Dead+1.0 Wind 30 deg - No Ice |
| 5 | 0.9 Dead+1.0 Wind 30 deg - No Ice |
| 6 | 1.2 Dead+1.0 Wind 60 deg - No Ice |
| 7 | 0.9 Dead+1.0 Wind 60 deg - No Ice |
| 8 | 1.2 Dead+1.0 Wind 90 deg - No Ice |
| 9 | 0.9 Dead+1.0 Wind 90 deg - No Ice |
| 10 | 1.2 Dead+1.0 Wind 120 deg - No Ice |
| 11 | 0.9 Dead+1.0 Wind 120 deg - No Ice |
| 12 | 1.2 Dead+1.0 Wind 150 deg - No Ice |
| 13 | 0.9 Dead+1.0 Wind 150 deg - No Ice |
| 14 | 1.2 Dead+1.0 Wind 180 deg - No Ice |
| 15 | 0.9 Dead+1.0 Wind 180 deg - No Ice |
| 16 | 1.2 Dead+1.0 Wind 210 deg - No Ice |
| 17 | 0.9 Dead+1.0 Wind 210 deg - No Ice |
| 18 | 1.2 Dead+1.0 Wind 240 deg - No Ice |
| 19 | 0.9 Dead+1.0 Wind 240 deg - No Ice |
| 20 | 1.2 Dead+1.0 Wind 270 deg - No Ice |
| 21 | 0.9 Dead+1.0 Wind 270 deg - No Ice |
| 22 | 1.2 Dead+1.0 Wind 300 deg - No Ice |
| 23 | 0.9 Dead+1.0 Wind 300 deg - No Ice |
| 24 | 1.2 Dead+1.0 Wind 330 deg - No Ice |
| 25 | 0.9 Dead+1.0 Wind 330 deg - No Ice |
| 26 | 1.2 Dead+1.0 Ice+1.0 Temp |
| 27 | 1.2 Dead+1.0 Wind 0 deg+1.0 Ice+1.0 Temp |
| 28 | 1.2 Dead+1.0 Wind 30 deg+1.0 Ice+1.0 Temp |
| 29 | 1.2 Dead+1.0 Wind 60 deg+1.0 Ice+1.0 Temp |
| 30 | 1.2 Dead+1.0 Wind 90 deg+1.0 Ice+1.0 Temp |
| 31 | 1.2 Dead+1.0 Wind 120 deg+1.0 Ice+1.0 Temp |
| 32 | 1.2 Dead+1.0 Wind 150 deg+1.0 Ice+1.0 Temp |
| 33 | 1.2 Dead+1.0 Wind 180 deg+1.0 Ice+1.0 Temp |
| 34 | 1.2 Dead+1.0 Wind 210 deg+1.0 Ice+1.0 Temp |
| 35 | 1.2 Dead+1.0 Wind 240 deg+1.0 Ice+1.0 Temp |
| 36 | 1.2 Dead+1.0 Wind 270 deg+1.0 Ice+1.0 Temp |
| 37 | 1.2 Dead+1.0 Wind 300 deg+1.0 Ice+1.0 Temp |
| 38 | 1.2 Dead+1.0 Wind 330 deg+1.0 Ice+1.0 Temp |
| 39 | Dead+Wind 0 deg - Service |
| 40 | Dead+Wind 30 deg - Service |
| 41 | Dead+Wind 60 deg - Service |
| 42 | Dead+Wind 90 deg - Service |
| 43 | Dead+Wind 120 deg - Service |
| 44 | Dead+Wind 150 deg - Service |
| 45 | Dead+Wind 180 deg - Service |
| 46 | Dead+Wind 210 deg - Service |
| 47 | Dead+Wind 240 deg - Service |
| 48 | Dead+Wind 270 deg - Service |
| 49 | Dead+Wind 300 deg - Service |
| 50 | Dead+Wind 330 deg - Service |

Maximum Member Forces

| Section No. | Elevation ft | Component Type | Condition | Gov. Load Comb. | Axial K | Major Axis Moment kip-ft | Minor Axis Moment kip-ft |
|-------------|--------------|----------------|------------------|-----------------|---------|--------------------------|--------------------------|
| L1 | 150 - 110.75 | Pole | Max Tension | 20 | 0.00 | -0.00 | -0.00 |
| | | | Max. Compression | 26 | -25.40 | -1.03 | 1.08 |
| | | | Max. Mx | 8 | -10.64 | -395.46 | 1.09 |
| | | | Max. My | 2 | -10.64 | -1.02 | 394.53 |
| | | | Max. Vy | 20 | -14.68 | 395.08 | -0.64 |
| | | | Max. Vx | 2 | -14.65 | -1.02 | 394.53 |

| | | | | |
|--|----------------|-----------------------|--------------------|-------------------|
| tnxTower Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350 | Job | Oxford (BU 873645) | Page | 9 of 15 |
| | Project | TEP No. 217889.549424 | Date | 10:52:36 05/23/21 |
| | Client | Crown Castle | Designed by | AAS |

| Section No. | Elevation ft | Component Type | Condition | Gov. Load Comb. | Axial K | Major Axis Moment kip-ft | Minor Axis Moment kip-ft |
|-------------|----------------|----------------|------------------|-----------------|---------|--------------------------|--------------------------|
| L2 | 110.75 - 74.75 | Pole | Max. Torque | 12 | | | 0.99 |
| | | | Max Tension | 1 | 0.00 | 0.00 | 0.00 |
| | | | Max. Compression | 26 | -33.03 | -0.78 | 0.94 |
| | | | Max. Mx | 8 | -15.92 | -968.86 | 2.13 |
| | | | Max. My | 2 | -15.92 | -2.04 | 966.76 |
| | | | Max. Vy | 20 | -17.84 | 968.54 | -1.68 |
| | | | Max. Vx | 14 | 17.80 | 1.77 | -966.27 |
| L3 | 74.75 - 39.5 | Pole | Max. Torque | 12 | | | 0.86 |
| | | | Max Tension | 1 | 0.00 | 0.00 | 0.00 |
| | | | Max. Compression | 26 | -42.84 | -0.50 | 0.78 |
| | | | Max. Mx | 8 | -23.25 | -1638.74 | 3.12 |
| | | | Max. My | 2 | -23.25 | -3.01 | 1635.50 |
| | | | Max. Vy | 20 | -20.94 | 1638.49 | -2.69 |
| | | | Max. Vx | 14 | 20.90 | 2.80 | -1635.05 |
| L4 | 39.5 - 0 | Pole | Max. Torque | 10 | | | 0.68 |
| | | | Max Tension | 1 | 0.00 | 0.00 | 0.00 |
| | | | Max. Compression | 26 | -58.87 | -0.11 | 0.55 |
| | | | Max. Mx | 8 | -36.07 | -2662.50 | 4.36 |
| | | | Max. My | 2 | -36.07 | -4.22 | 2657.83 |
| | | | Max. Vy | 20 | -24.36 | 2662.38 | -3.99 |
| | | | Max. Vx | 14 | 24.33 | 4.13 | -2657.44 |
| | | Max. Torque | 38 | | | 0.82 | |

Maximum Reactions

| Location | Condition | Gov. Load Comb. | Vertical K | Horizontal, X K | Horizontal, Z K |
|----------|---------------------|-----------------|------------|-----------------|-----------------|
| Pole | Max. Vert | 30 | 58.87 | -7.01 | 0.00 |
| | Max. H _x | 20 | 36.09 | 24.34 | -0.03 |
| | Max. H _z | 3 | 27.07 | -0.03 | 24.31 |
| | Max. M _x | 2 | 2657.83 | -0.03 | 24.31 |
| | Max. M _z | 8 | 2662.50 | -24.34 | 0.03 |
| | Max. Torsion | 38 | 0.82 | 3.50 | 6.06 |
| | Min. Vert | 25 | 27.07 | 12.15 | 21.04 |
| | Min. H _x | 9 | 27.07 | -24.34 | 0.03 |
| | Min. H _z | 14 | 36.09 | 0.03 | -24.31 |
| | Min. M _x | 14 | -2657.44 | 0.03 | -24.31 |
| | Min. M _z | 20 | -2662.38 | 24.34 | -0.03 |
| | Min. Torsion | 32 | -0.82 | -3.50 | -6.06 |

Tower Mast Reaction Summary

| Load Combination | Vertical K | Shear _x K | Shear _z K | Overturning Moment, M _x kip-ft | Overturning Moment, M _z kip-ft | Torque kip-ft |
|-----------------------------------|------------|----------------------|----------------------|---|---|---------------|
| Dead Only | 30.07 | 0.00 | 0.00 | -0.14 | -0.04 | 0.00 |
| 1.2 Dead+1.0 Wind 0 deg - No Ice | 36.09 | 0.03 | -24.31 | -2657.83 | -4.22 | 0.16 |
| 0.9 Dead+1.0 Wind 0 deg - No Ice | 27.07 | 0.03 | -24.31 | -2627.33 | -4.16 | 0.16 |
| 1.2 Dead+1.0 Wind 30 deg - No Ice | 36.09 | 12.19 | -21.06 | -2303.84 | -1334.89 | -0.01 |

| | | |
|---|--|---|
| <p style="text-align: center;">tnxTower</p> <p style="text-align: center;">Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350</p> | <p style="text-align: center;">Job</p> <p style="text-align: center;">Oxford (BU 873645)</p> | <p style="text-align: center;">Page</p> <p style="text-align: center;">10 of 15</p> |
| | <p style="text-align: center;">Project</p> <p style="text-align: center;">TEP No. 217889.549424</p> | <p style="text-align: center;">Date</p> <p style="text-align: center;">10:52:36 05/23/21</p> |
| | <p style="text-align: center;">Client</p> <p style="text-align: center;">Crown Castle</p> | <p style="text-align: center;">Designed by</p> <p style="text-align: center;">AAS</p> |

| Load Combination | Vertical K | Shear _x K | Shear _z K | Overturning Moment, M _x kip-ft | Overturning Moment, M _z kip-ft | Torque kip-ft |
|--|---------------|-------------------------|-------------------------|--|--|------------------|
| 0.9 Dead+1.0 Wind 30 deg - No Ice | 27.07 | 12.19 | -21.06 | -2277.41 | -1319.58 | -0.01 |
| 1.2 Dead+1.0 Wind 60 deg - No Ice | 36.09 | 21.09 | -12.18 | -1332.61 | -2307.88 | -0.18 |
| 0.9 Dead+1.0 Wind 60 deg - No Ice | 27.07 | 21.09 | -12.18 | -1317.29 | -2281.42 | -0.18 |
| 1.2 Dead+1.0 Wind 90 deg - No Ice | 36.09 | 24.34 | -0.03 | -4.36 | -2662.50 | -0.31 |
| 0.9 Dead+1.0 Wind 90 deg - No Ice | 27.07 | 24.34 | -0.03 | -4.26 | -2631.98 | -0.30 |
| 1.2 Dead+1.0 Wind 120 deg - No Ice | 36.09 | 21.06 | 12.13 | 1325.02 | -2303.72 | -0.35 |
| 0.9 Dead+1.0 Wind 120 deg - No Ice | 27.07 | 21.06 | 12.13 | 1309.90 | -2277.32 | -0.34 |
| 1.2 Dead+1.0 Wind 150 deg - No Ice | 36.09 | 12.15 | 21.04 | 2299.32 | -1327.67 | -0.29 |
| 0.9 Dead+1.0 Wind 150 deg - No Ice | 27.07 | 12.15 | 21.04 | 2273.04 | -1312.45 | -0.29 |
| 1.2 Dead+1.0 Wind 180 deg - No Ice | 36.09 | -0.03 | 24.31 | 2657.44 | 4.13 | -0.16 |
| 0.9 Dead+1.0 Wind 180 deg - No Ice | 27.07 | -0.03 | 24.31 | 2627.06 | 4.09 | -0.16 |
| 1.2 Dead+1.0 Wind 210 deg - No Ice | 36.09 | -12.19 | 21.06 | 2303.47 | 1334.79 | 0.01 |
| 0.9 Dead+1.0 Wind 210 deg - No Ice | 27.07 | -12.19 | 21.06 | 2277.13 | 1319.51 | 0.01 |
| 1.2 Dead+1.0 Wind 240 deg - No Ice | 36.09 | -21.09 | 12.18 | 1332.24 | 2307.77 | 0.18 |
| 0.9 Dead+1.0 Wind 240 deg - No Ice | 27.07 | -21.09 | 12.18 | 1317.02 | 2281.35 | 0.18 |
| 1.2 Dead+1.0 Wind 270 deg - No Ice | 36.09 | -24.34 | 0.03 | 3.99 | 2662.38 | 0.30 |
| 0.9 Dead+1.0 Wind 270 deg - No Ice | 27.07 | -24.34 | 0.03 | 3.99 | 2631.90 | 0.30 |
| 1.2 Dead+1.0 Wind 300 deg - No Ice | 36.09 | -21.06 | -12.13 | -1325.39 | 2303.62 | 0.34 |
| 0.9 Dead+1.0 Wind 300 deg - No Ice | 27.07 | -21.06 | -12.13 | -1310.16 | 2277.25 | 0.34 |
| 1.2 Dead+1.0 Wind 330 deg - No Ice | 36.09 | -12.15 | -21.04 | -2299.69 | 1327.57 | 0.29 |
| 0.9 Dead+1.0 Wind 330 deg - No Ice | 27.07 | -12.15 | -21.04 | -2273.30 | 1312.38 | 0.29 |
| 1.2 Dead+1.0 Ice+1.0 Temp | 58.87 | 0.00 | -0.00 | -0.55 | -0.11 | -0.00 |
| 1.2 Dead+1.0 Wind 0 deg+1.0 Ice+1.0 Temp | 58.87 | 0.00 | -7.00 | -755.51 | -0.92 | -0.74 |
| 1.2 Dead+1.0 Wind 30 deg+1.0 Ice+1.0 Temp | 58.87 | 3.51 | -6.07 | -654.75 | -378.69 | -0.46 |
| 1.2 Dead+1.0 Wind 60 deg+1.0 Ice+1.0 Temp | 58.87 | 6.07 | -3.51 | -378.73 | -655.03 | -0.06 |
| 1.2 Dead+1.0 Wind 90 deg+1.0 Ice+1.0 Temp | 58.87 | 7.01 | -0.00 | -1.40 | -755.90 | 0.36 |
| 1.2 Dead+1.0 Wind 120 deg+1.0 Ice+1.0 Temp | 58.87 | 6.07 | 3.50 | 376.14 | -654.28 | 0.68 |
| 1.2 Dead+1.0 Wind 150 deg+1.0 Ice+1.0 Temp | 58.87 | 3.50 | 6.06 | 652.71 | -377.39 | 0.82 |
| 1.2 Dead+1.0 Wind 180 deg+1.0 Ice+1.0 Temp | 58.87 | -0.00 | 7.00 | 754.22 | 0.58 | 0.74 |
| 1.2 Dead+1.0 Wind 210 deg+1.0 Ice+1.0 Temp | 58.87 | -3.51 | 6.07 | 653.46 | 378.35 | 0.46 |
| 1.2 Dead+1.0 Wind 240 deg+1.0 Ice+1.0 Temp | 58.87 | -6.07 | 3.51 | 377.44 | 654.69 | 0.06 |

| | | | | |
|--|----------------|-----------------------|--------------------|-------------------|
| tnxTower Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350 | Job | Oxford (BU 873645) | Page | 11 of 15 |
| | Project | TEP No. 217889.549424 | Date | 10:52:36 05/23/21 |
| | Client | Crown Castle | Designed by | AAS |

| Load Combination | Vertical | Shear _x | Shear _z | Overturning Moment, M _x | Overturning Moment, M _z | Torque |
|--|----------|--------------------|--------------------|------------------------------------|------------------------------------|--------|
| | K | K | K | kip-ft | kip-ft | kip-ft |
| 1.2 Dead+1.0 Wind 270 deg+1.0 Ice+1.0 Temp | 58.87 | -7.01 | 0.00 | 0.10 | 755.56 | -0.36 |
| 1.2 Dead+1.0 Wind 300 deg+1.0 Ice+1.0 Temp | 58.87 | -6.07 | -3.50 | -377.43 | 653.94 | -0.68 |
| 1.2 Dead+1.0 Wind 330 deg+1.0 Ice+1.0 Temp | 58.87 | -3.50 | -6.06 | -654.01 | 377.04 | -0.82 |
| Dead+Wind 0 deg - Service | 30.07 | 0.01 | -5.28 | -573.47 | -0.94 | 0.04 |
| Dead+Wind 30 deg - Service | 30.07 | 2.65 | -4.57 | -497.11 | -288.00 | -0.00 |
| Dead+Wind 60 deg - Service | 30.07 | 4.58 | -2.64 | -287.59 | -497.90 | -0.04 |
| Dead+Wind 90 deg - Service | 30.07 | 5.28 | -0.01 | -1.05 | -574.39 | -0.07 |
| Dead+Wind 120 deg - Service | 30.07 | 4.57 | 2.63 | 285.72 | -497.00 | -0.08 |
| Dead+Wind 150 deg - Service | 30.07 | 2.64 | 4.57 | 495.90 | -286.44 | -0.07 |
| Dead+Wind 180 deg - Service | 30.07 | -0.01 | 5.28 | 573.16 | 0.86 | -0.04 |
| Dead+Wind 210 deg - Service | 30.07 | -2.65 | 4.57 | 496.80 | 287.91 | 0.00 |
| Dead+Wind 240 deg - Service | 30.07 | -4.58 | 2.64 | 287.28 | 497.81 | 0.04 |
| Dead+Wind 270 deg - Service | 30.07 | -5.28 | 0.01 | 0.75 | 574.31 | 0.07 |
| Dead+Wind 300 deg - Service | 30.07 | -4.57 | -2.63 | -286.03 | 496.91 | 0.08 |
| Dead+Wind 330 deg - Service | 30.07 | -2.64 | -4.57 | -496.21 | 286.35 | 0.07 |

Solution Summary

| Load Comb. | Sum of Applied Forces | | | Sum of Reactions | | | % Error |
|------------|-----------------------|---------|---------|------------------|---------|---------|---------|
| | PX K | PY K | PZ K | PX K | PY K | PZ K | |
| 1 | 0.00 | -30.07 | 0.00 | 0.00 | 30.07 | 0.00 | 0.000% |
| 2 | 0.03 | -36.09 | -24.31 | -0.03 | 36.09 | 24.31 | 0.000% |
| 3 | 0.03 | -27.07 | -24.31 | -0.03 | 27.07 | 24.31 | 0.000% |
| 4 | 12.19 | -36.09 | -21.06 | -12.19 | 36.09 | 21.06 | 0.000% |
| 5 | 12.19 | -27.07 | -21.06 | -12.19 | 27.07 | 21.06 | 0.000% |
| 6 | 21.09 | -36.09 | -12.18 | -21.09 | 36.09 | 12.18 | 0.000% |
| 7 | 21.09 | -27.07 | -12.18 | -21.09 | 27.07 | 12.18 | 0.000% |
| 8 | 24.34 | -36.09 | -0.03 | -24.34 | 36.09 | 0.03 | 0.000% |
| 9 | 24.34 | -27.07 | -0.03 | -24.34 | 27.07 | 0.03 | 0.000% |
| 10 | 21.06 | -36.09 | 12.13 | -21.06 | 36.09 | -12.13 | 0.000% |
| 11 | 21.06 | -27.07 | 12.13 | -21.06 | 27.07 | -12.13 | 0.000% |
| 12 | 12.15 | -36.09 | 21.04 | -12.15 | 36.09 | -21.04 | 0.000% |
| 13 | 12.15 | -27.07 | 21.04 | -12.15 | 27.07 | -21.04 | 0.000% |
| 14 | -0.03 | -36.09 | 24.31 | 0.03 | 36.09 | -24.31 | 0.000% |
| 15 | -0.03 | -27.07 | 24.31 | 0.03 | 27.07 | -24.31 | 0.000% |
| 16 | -12.19 | -36.09 | 21.06 | 12.19 | 36.09 | -21.06 | 0.000% |
| 17 | -12.19 | -27.07 | 21.06 | 12.19 | 27.07 | -21.06 | 0.000% |
| 18 | -21.09 | -36.09 | 12.18 | 21.09 | 36.09 | -12.18 | 0.000% |
| 19 | -21.09 | -27.07 | 12.18 | 21.09 | 27.07 | -12.18 | 0.000% |
| 20 | -24.34 | -36.09 | 0.03 | 24.34 | 36.09 | -0.03 | 0.000% |
| 21 | -24.34 | -27.07 | 0.03 | 24.34 | 27.07 | -0.03 | 0.000% |
| 22 | -21.06 | -36.09 | -12.13 | 21.06 | 36.09 | 12.13 | 0.000% |
| 23 | -21.06 | -27.07 | -12.13 | 21.06 | 27.07 | 12.13 | 0.000% |
| 24 | -12.15 | -36.09 | -21.04 | 12.15 | 36.09 | 21.04 | 0.000% |
| 25 | -12.15 | -27.07 | -21.04 | 12.15 | 27.07 | 21.04 | 0.000% |
| 26 | 0.00 | -58.87 | 0.00 | -0.00 | 58.87 | 0.00 | 0.000% |
| 27 | 0.00 | -58.87 | -7.00 | -0.00 | 58.87 | 7.00 | 0.000% |
| 28 | 3.51 | -58.87 | -6.07 | -3.51 | 58.87 | 6.07 | 0.000% |
| 29 | 6.07 | -58.87 | -3.51 | -6.07 | 58.87 | 3.51 | 0.000% |
| 30 | 7.01 | -58.87 | -0.00 | -7.01 | 58.87 | 0.00 | 0.000% |
| 31 | 6.07 | -58.87 | 3.50 | -6.07 | 58.87 | -3.50 | 0.000% |
| 32 | 3.50 | -58.87 | 6.06 | -3.50 | 58.87 | -6.06 | 0.000% |
| 33 | -0.00 | -58.87 | 7.00 | 0.00 | 58.87 | -7.00 | 0.000% |
| 34 | -3.51 | -58.87 | 6.07 | 3.51 | 58.87 | -6.07 | 0.000% |

| | | | | |
|--|----------------|-----------------------|--------------------|-------------------|
| tnxTower Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350 | Job | Oxford (BU 873645) | Page | 12 of 15 |
| | Project | TEP No. 217889.549424 | Date | 10:52:36 05/23/21 |
| | Client | Crown Castle | Designed by | AAS |

| Load Comb. | Sum of Applied Forces | | | Sum of Reactions | | | % Error |
|------------|-----------------------|---------|---------|------------------|---------|---------|---------|
| | PX K | PY K | PZ K | PX K | PY K | PZ K | |
| 35 | -6.07 | -58.87 | 3.51 | 6.07 | 58.87 | -3.51 | 0.000% |
| 36 | -7.01 | -58.87 | 0.00 | 7.01 | 58.87 | -0.00 | 0.000% |
| 37 | -6.07 | -58.87 | -3.50 | 6.07 | 58.87 | 3.50 | 0.000% |
| 38 | -3.50 | -58.87 | -6.06 | 3.50 | 58.87 | 6.06 | 0.000% |
| 39 | 0.01 | -30.07 | -5.28 | -0.01 | 30.07 | 5.28 | 0.000% |
| 40 | 2.65 | -30.07 | -4.57 | -2.65 | 30.07 | 4.57 | 0.000% |
| 41 | 4.58 | -30.07 | -2.64 | -4.58 | 30.07 | 2.64 | 0.000% |
| 42 | 5.28 | -30.07 | -0.01 | -5.28 | 30.07 | 0.01 | 0.000% |
| 43 | 4.57 | -30.07 | 2.63 | -4.57 | 30.07 | -2.63 | 0.000% |
| 44 | 2.64 | -30.07 | 4.57 | -2.64 | 30.07 | -4.57 | 0.000% |
| 45 | -0.01 | -30.07 | 5.28 | 0.01 | 30.07 | -5.28 | 0.000% |
| 46 | -2.65 | -30.07 | 4.57 | 2.65 | 30.07 | -4.57 | 0.000% |
| 47 | -4.58 | -30.07 | 2.64 | 4.58 | 30.07 | -2.64 | 0.000% |
| 48 | -5.28 | -30.07 | 0.01 | 5.28 | 30.07 | -0.01 | 0.000% |
| 49 | -4.57 | -30.07 | -2.63 | 4.57 | 30.07 | 2.63 | 0.000% |
| 50 | -2.64 | -30.07 | -4.57 | 2.64 | 30.07 | 4.57 | 0.000% |

Non-Linear Convergence Results

| Load Combination | Converged? | Number of Cycles | Displacement Tolerance | Force Tolerance |
|------------------|------------|------------------|------------------------|-----------------|
| 1 | Yes | 4 | 0.0000001 | 0.0000001 |
| 2 | Yes | 5 | 0.0000001 | 0.00004934 |
| 3 | Yes | 4 | 0.0000001 | 0.00058636 |
| 4 | Yes | 6 | 0.0000001 | 0.00010397 |
| 5 | Yes | 5 | 0.0000001 | 0.00086676 |
| 6 | Yes | 6 | 0.0000001 | 0.00010401 |
| 7 | Yes | 5 | 0.0000001 | 0.00086700 |
| 8 | Yes | 5 | 0.0000001 | 0.00004910 |
| 9 | Yes | 4 | 0.0000001 | 0.00058077 |
| 10 | Yes | 6 | 0.0000001 | 0.00010129 |
| 11 | Yes | 5 | 0.0000001 | 0.00084424 |
| 12 | Yes | 6 | 0.0000001 | 0.00010437 |
| 13 | Yes | 5 | 0.0000001 | 0.00087061 |
| 14 | Yes | 4 | 0.0000001 | 0.00081809 |
| 15 | Yes | 4 | 0.0000001 | 0.00041115 |
| 16 | Yes | 6 | 0.0000001 | 0.00010303 |
| 17 | Yes | 5 | 0.0000001 | 0.00085895 |
| 18 | Yes | 6 | 0.0000001 | 0.00010308 |
| 19 | Yes | 5 | 0.0000001 | 0.00085932 |
| 20 | Yes | 4 | 0.0000001 | 0.00081179 |
| 21 | Yes | 4 | 0.0000001 | 0.00040272 |
| 22 | Yes | 6 | 0.0000001 | 0.00010446 |
| 23 | Yes | 5 | 0.0000001 | 0.00087117 |
| 24 | Yes | 6 | 0.0000001 | 0.00010128 |
| 25 | Yes | 5 | 0.0000001 | 0.00084420 |
| 26 | Yes | 4 | 0.0000001 | 0.00001119 |
| 27 | Yes | 5 | 0.0000001 | 0.00069126 |
| 28 | Yes | 5 | 0.0000001 | 0.00094090 |
| 29 | Yes | 5 | 0.0000001 | 0.00094696 |
| 30 | Yes | 5 | 0.0000001 | 0.00069076 |
| 31 | Yes | 5 | 0.0000001 | 0.00094071 |
| 32 | Yes | 5 | 0.0000001 | 0.00092949 |
| 33 | Yes | 5 | 0.0000001 | 0.00068708 |
| 34 | Yes | 5 | 0.0000001 | 0.00093802 |
| 35 | Yes | 5 | 0.0000001 | 0.00093209 |

| | | | | |
|--|----------------|-----------------------|--------------------|-------------------|
| tnxTower Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350 | Job | Oxford (BU 873645) | Page | 13 of 15 |
| | Project | TEP No. 217889.549424 | Date | 10:52:36 05/23/21 |
| | Client | Crown Castle | Designed by | AAS |

| | | | | |
|----|-----|---|------------|------------|
| 36 | Yes | 5 | 0.00000001 | 0.00068739 |
| 37 | Yes | 5 | 0.00000001 | 0.00093240 |
| 38 | Yes | 5 | 0.00000001 | 0.00094364 |
| 39 | Yes | 4 | 0.00000001 | 0.00007588 |
| 40 | Yes | 4 | 0.00000001 | 0.00052158 |
| 41 | Yes | 4 | 0.00000001 | 0.00052306 |
| 42 | Yes | 4 | 0.00000001 | 0.00007660 |
| 43 | Yes | 4 | 0.00000001 | 0.00048599 |
| 44 | Yes | 4 | 0.00000001 | 0.00053453 |
| 45 | Yes | 4 | 0.00000001 | 0.00007376 |
| 46 | Yes | 4 | 0.00000001 | 0.00050649 |
| 47 | Yes | 4 | 0.00000001 | 0.00050600 |
| 48 | Yes | 4 | 0.00000001 | 0.00007445 |
| 49 | Yes | 4 | 0.00000001 | 0.00053613 |
| 50 | Yes | 4 | 0.00000001 | 0.00048660 |

Maximum Tower Deflections - Service Wind

| Section No. | Elevation ft | Horz. Deflection in | Gov. Load Comb. | Tilt ° | Twist ° |
|-------------|-----------------|------------------------|-----------------|-----------|------------|
| L1 | 150 - 110.75 | 21.499 | 41 | 1.259 | 0.002 |
| L2 | 114.75 - 74.75 | 12.621 | 41 | 1.082 | 0.001 |
| L3 | 79.5 - 39.5 | 5.869 | 41 | 0.714 | 0.000 |
| L4 | 45 - 0 | 1.853 | 41 | 0.377 | 0.000 |

Critical Deflections and Radius of Curvature - Service Wind

| Elevation ft | Appurtenance | Gov. Load Comb. | Deflection in | Tilt ° | Twist ° | Radius of Curvature ft |
|-----------------|---------------------------------|-----------------|------------------|-----------|------------|---------------------------|
| 150.00 | Lighting Rod 1/2" x 2' | 41 | 21.499 | 1.259 | 0.002 | 41619 |
| 147.00 | (2) LPA-80063/6CF w/ Mount Pipe | 41 | 20.708 | 1.248 | 0.002 | 41619 |
| 139.00 | 7770.00 w/ Mount Pipe | 41 | 18.610 | 1.218 | 0.002 | 18918 |

Maximum Tower Deflections - Design Wind

| Section No. | Elevation ft | Horz. Deflection in | Gov. Load Comb. | Tilt ° | Twist ° |
|-------------|-----------------|------------------------|-----------------|-----------|------------|
| L1 | 150 - 110.75 | 99.581 | 6 | 5.838 | 0.009 |
| L2 | 114.75 - 74.75 | 58.502 | 6 | 5.021 | 0.004 |
| L3 | 79.5 - 39.5 | 27.216 | 6 | 3.313 | 0.001 |
| L4 | 45 - 0 | 8.593 | 6 | 1.749 | 0.001 |

Critical Deflections and Radius of Curvature - Design Wind

| | | | | |
|--|----------------|-----------------------|--------------------|-------------------|
| tnxTower Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350 | Job | Oxford (BU 873645) | Page | 14 of 15 |
| | Project | TEP No. 217889.549424 | Date | 10:52:36 05/23/21 |
| | Client | Crown Castle | Designed by | AAS |

| Elevation | Appurtenance | Gov. Load Comb. | Deflection in | Tilt ° | Twist ° | Radius of Curvature ft |
|-----------|---------------------------------|-----------------|---------------|--------|---------|------------------------|
| 150.00 | Lighting Rod 1/2" x 2' | 6 | 99.581 | 5.838 | 0.009 | 9169 |
| 147.00 | (2) LPA-80063/6CF w/ Mount Pipe | 6 | 95.921 | 5.789 | 0.009 | 9169 |
| 139.00 | 7770.00 w/ Mount Pipe | 6 | 86.217 | 5.652 | 0.008 | 4166 |

Compression Checks

Pole Design Data

| Section No. | Elevation ft | Size | L ft | L _u ft | Kl/r | A in ² | P _u K | φP _n K | Ratio $\frac{P_u}{\phi P_n}$ |
|-------------|--------------------|-----------------------|-------|-------------------|------|-------------------|------------------|-------------------|------------------------------|
| L1 | 150 - 110.75 (1) | TP31.38x24x0.219 | 39.25 | 0.00 | 0.0 | 21.114 | -10.63 | 1235.14 | 0.009 |
| L2 | 110.75 - 74.75 (2) | TP37.711x30.19x0.25 | 40.00 | 0.00 | 0.0 | 29.017 | -15.92 | 1697.47 | 0.009 |
| L3 | 74.75 - 39.5 (3) | TP43.839x36.318x0.313 | 40.00 | 0.00 | 0.0 | 42.147 | -23.25 | 2465.61 | 0.009 |
| L4 | 39.5 - 0 (4) | TP50.64x42.18x0.375 | 45.00 | 0.00 | 0.0 | 59.828 | -36.07 | 3499.93 | 0.010 |

Pole Bending Design Data

| Section No. | Elevation ft | Size | M _{ux} kip-ft | φM _{ux} kip-ft | Ratio $\frac{M_{ux}}{\phi M_{ux}}$ | M _{uy} kip-ft | φM _{uy} kip-ft | Ratio $\frac{M_{uy}}{\phi M_{uy}}$ |
|-------------|--------------------|-----------------------|------------------------|-------------------------|------------------------------------|------------------------|-------------------------|------------------------------------|
| L1 | 150 - 110.75 (1) | TP31.38x24x0.219 | 396.06 | 873.35 | 0.453 | 0.00 | 873.35 | 0.000 |
| L2 | 110.75 - 74.75 (2) | TP37.711x30.19x0.25 | 970.05 | 1414.33 | 0.686 | 0.00 | 1414.33 | 0.000 |
| L3 | 74.75 - 39.5 (3) | TP43.839x36.318x0.313 | 1640.50 | 2456.62 | 0.668 | 0.00 | 2456.62 | 0.000 |
| L4 | 39.5 - 0 (4) | TP50.64x42.18x0.375 | 2664.98 | 4146.91 | 0.643 | 0.00 | 4146.91 | 0.000 |

Pole Shear Design Data

| Section No. | Elevation ft | Size | Actual V _u K | φV _n K | Ratio $\frac{V_u}{\phi V_n}$ | Actual T _u kip-ft | φT _n kip-ft | Ratio $\frac{T_u}{\phi T_n}$ |
|-------------|--------------------|-----------------------|-------------------------|-------------------|------------------------------|------------------------------|------------------------|------------------------------|
| L1 | 150 - 110.75 (1) | TP31.38x24x0.219 | 14.70 | 370.54 | 0.040 | 0.18 | 986.78 | 0.000 |
| L2 | 110.75 - 74.75 (2) | TP37.711x30.19x0.25 | 17.85 | 509.24 | 0.035 | 0.18 | 1630.82 | 0.000 |
| L3 | 74.75 - 39.5 (3) | TP43.839x36.318x0.313 | 20.95 | 739.68 | 0.028 | 0.18 | 2752.55 | 0.000 |
| L4 | 39.5 - 0 (4) | TP50.64x42.18x0.375 | 24.38 | 1049.98 | 0.023 | 0.18 | 4621.97 | 0.000 |

| | | |
|--|---|----------------------------------|
| tnxTower Tower Engineering Professionals 326 Tryon Road Raleigh, NC 27603 Phone: (919) 661-6351 FAX: (919) 661-6350 | Job Oxford (BU 873645) | Page 15 of 15 |
| | Project TEP No. 217889.549424 | Date 10:52:36 05/23/21 |
| | Client Crown Castle | Designed by AAS |


Pole Interaction Design Data

| Section No. | Elevation ft | Ratio | Ratio | Ratio | Ratio | Ratio | Comb. Stress Ratio | Allow. Stress Ratio | Criteria |
|-------------|-----------------------|-------|----------|----------|-------|-------|--------------------|---------------------|----------|
| | | P_u | M_{ux} | M_{uy} | V_u | T_u | | | |
| L1 | 150 - 110.75 (1) | 0.009 | 0.453 | 0.000 | 0.040 | 0.000 | 0.464 | 1.050 | 4.8.2 |
| L2 | 110.75 - 74.75 (2) | 0.009 | 0.686 | 0.000 | 0.035 | 0.000 | 0.696 | 1.050 | 4.8.2 |
| L3 | 74.75 - 39.5 (3) | 0.009 | 0.668 | 0.000 | 0.028 | 0.000 | 0.678 | 1.050 | 4.8.2 |
| L4 | 39.5 - 0 (4) | 0.010 | 0.643 | 0.000 | 0.023 | 0.000 | 0.653 | 1.050 | 4.8.2 |

Section Capacity Table

| Section No. | Elevation ft | Component Type | Size | Critical Element | P K | ϕP_{allow} K | % Capacity | Pass Fail |
|-----------------|-----------------|----------------|-----------------------|------------------|--------|-----------------------|---------------|--------------|
| L1 | 150 - 110.75 | Pole | TP31.38x24x0.219 | 1 | -10.63 | 1296.90 | 44.2 | Pass |
| L2 | 110.75 - 74.75 | Pole | TP37.711x30.19x0.25 | 2 | -15.92 | 1782.34 | 66.3 | Pass |
| L3 | 74.75 - 39.5 | Pole | TP43.839x36.318x0.313 | 3 | -23.25 | 2588.89 | 64.6 | Pass |
| L4 | 39.5 - 0 | Pole | TP50.64x42.18x0.375 | 4 | -36.07 | 3674.93 | 62.2 | Pass |
| Summary | | | | | | | | |
| Pole (L2) | | | | | | | 66.3 | Pass |
| Rating = | | | | | | | 66.3 | Pass |

APPENDIX B
BASE LEVEL DRAWING

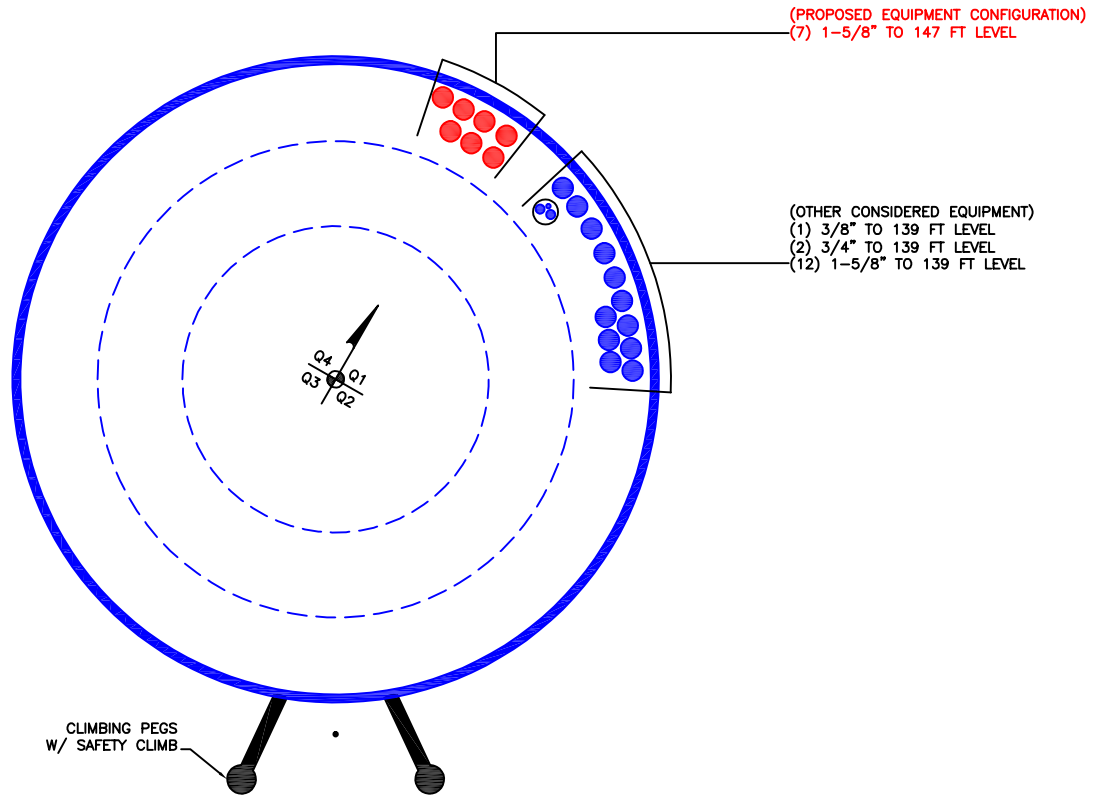


APPENDIX C
ADDITIONAL CALCULATIONS

ASCE 7 Hazards Report

Address:
No Address at This Location

Standard: ASCE/SEI 7-10
Risk Category: II
Soil Class: D - Stiff Soil

Elevation: 669.86 ft (NAVD 88)
Latitude: 41.447086
Longitude: -73.15231

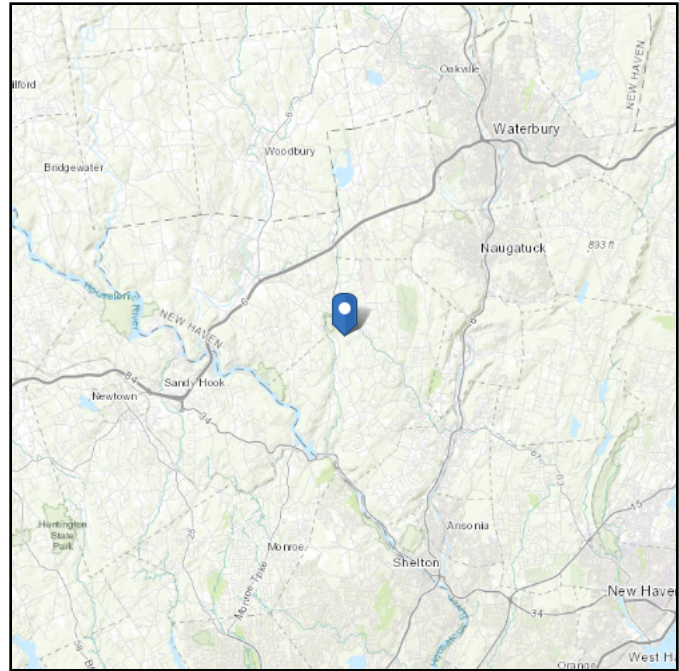

Wind

Results:

| | | |
|--------------|----------|------------------------------------|
| Wind Speed: | 120 Vmph | 125 Vmph Required per Jurisdiction |
| 10-year MRI | 76 Vmph | |
| 25-year MRI | 86 Vmph | |
| 50-year MRI | 91 Vmph | |
| 100-year MRI | 98 Vmph | |

Data Source: ASCE/SEI 7-10, Fig. 26.5-1A and Figs. CC-1–CC-4, and Section 26.5.2, incorporating errata of March 12, 2014

Value provided is 3-second gust wind speeds at 33 ft above ground for Exposure C Category, based on linear interpolation between contours. Wind speeds are interpolated in accordance with the 7-10 Standard. Wind speeds correspond to approximately a 7% probability of exceedance in 50 years (annual exceedance probability = 0.00143, MRI = 700 years).



Site is in a hurricane-prone region as defined in ASCE/SEI 7-10 Section 26.2. Glazed openings need not be protected against wind-borne debris.

Site Soil Class: D - Stiff Soil

Results:

| | | | |
|------------|-------|--------------------|-------|
| S_s : | 0.196 | S_{DS} : | 0.209 |
| S_1 : | 0.064 | S_{D1} : | 0.103 |
| F_a : | 1.6 | T_L : | 6 |
| F_v : | 2.4 | PGA : | 0.103 |
| S_{MS} : | 0.314 | PGA _M : | 0.165 |
| S_{M1} : | 0.155 | F _{PGA} : | 1.593 |
| | | I_e : | 1 |

Seismic Design Category B

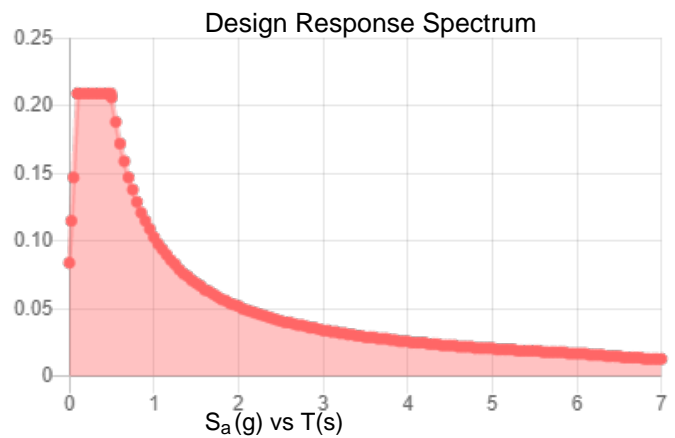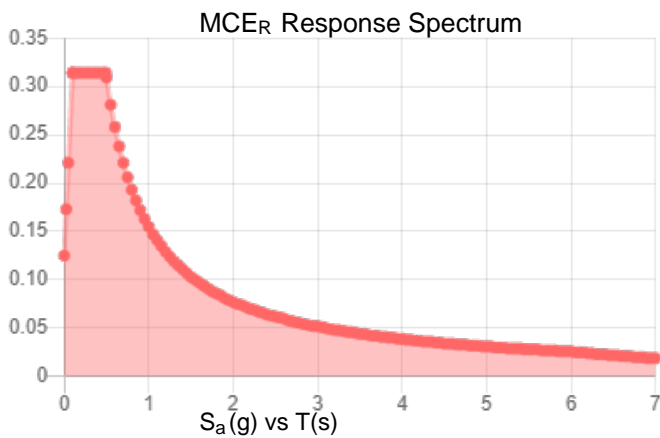

Data Accessed:

Wed May 19 2021

Date Source:

USGS Seismic Design Maps based on ASCE/SEI 7-10, incorporating Supplement 1 and errata of March 31, 2013, and ASCE/SEI 7-10 Table 1.5-2. Additional data for site-specific ground motion procedures in accordance with ASCE/SEI 7-10 Ch. 21 are available from USGS.

Ice

Results:

Ice Thickness: 0.75 in.

Concurrent Temperature: 15 F

Gust Speed: 50 mph

Data Source: Standard ASCE/SEI 7-10, Figs. 10-2 through 10-8

Date Accessed: Wed May 19 2021

Ice thicknesses on structures in exposed locations at elevations higher than the surrounding terrain and in valleys and gorges may exceed the mapped values.

Values provided are equivalent radial ice thicknesses due to freezing rain with concurrent 3-second gust speeds, for a 50-year mean recurrence interval, and temperatures concurrent with ice thicknesses due to freezing rain. Thicknesses for ice accretions caused by other sources shall be obtained from local meteorological studies. Ice thicknesses in exposed locations at elevations higher than the surrounding terrain and in valleys and gorges may exceed the mapped values.

The ASCE 7 Hazard Tool is provided for your convenience, for informational purposes only, and is provided “as is” and without warranties of any kind. The location data included herein has been obtained from information developed, produced, and maintained by third party providers; or has been extrapolated from maps incorporated in the ASCE 7 standard. While ASCE has made every effort to use data obtained from reliable sources or methodologies, ASCE does not make any representations or warranties as to the accuracy, completeness, reliability, currency, or quality of any data provided herein. Any third-party links provided by this Tool should not be construed as an endorsement, affiliation, relationship, or sponsorship of such third-party content by or from ASCE.

ASCE does not intend, nor should anyone interpret, the results provided by this Tool to replace the sound judgment of a competent professional, having knowledge and experience in the appropriate field(s) of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the contents of this Tool or the ASCE 7 standard.

In using this Tool, you expressly assume all risks associated with your use. Under no circumstances shall ASCE or its officers, directors, employees, members, affiliates, or agents be liable to you or any other person for any direct, indirect, special, incidental, or consequential damages arising from or related to your use of, or reliance on, the Tool or any information obtained therein. To the fullest extent permitted by law, you agree to release and hold harmless ASCE from any and all liability of any nature arising out of or resulting from any use of data provided by the ASCE 7 Hazard Tool.

Monopole Base Plate Connection




| Site Info | |
|-----------|---------------|
| BU # | 873645 |
| Site Name | Oxford |
| Order # | 552681 Rev. 0 |

| Analysis Considerations | |
|-------------------------|------|
| TIA-222 Revision | H |
| Grout Considered: | No |
| I_{ar} (in) | 0.75 |

| Applied Loads | |
|--------------------|---------|
| Moment (kip-ft) | 2664.99 |
| Axial Force (kips) | 36.07 |
| Shear Force (kips) | 24.38 |

*TIA-222-H Section 15.5 Applied

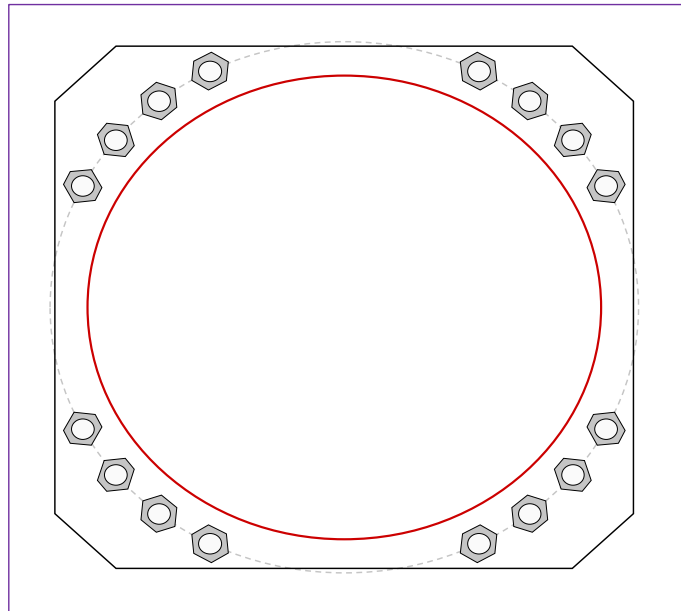

Connection Properties Analysis Results

| Anchor Rod Data | |
|---|--|
| (16) 2-1/4" ϕ bolts (A615-75 N; $F_y=75$ ksi, $F_u=100$ ksi) on 58" BC | |
| Anchor Spacing: 6 in | |

| Base Plate Data | |
|--|--|
| 57" W x 3" Plate (A572-55; $F_y=55$ ksi, $F_u=70$ ksi); Clip: 6 in | |

| Stiffener Data | |
|----------------|--|
| N/A | |

| Pole Data | |
|---|--|
| 50.64" x 0.375" 18-sided pole (A607-65; $F_y=65$ ksi, $F_u=80$ ksi) | |

| Anchor Rod Summary (units of kips, kip-in) | | |
|---|----------------------|----------------------|
| $Pu_t = 135.5$ | $\phi Pn_t = 243.75$ | Stress Rating |
| $Vu = 1.52$ | $\phi Vn = 149.1$ | 52.9% |
| $Mu = n/a$ | $\phi Mn = n/a$ | Pass |

| Base Plate Summary | | |
|-------------------------|--------------|-------------|
| Max Stress (ksi): | 23.62 | (Flexural) |
| Allowable Stress (ksi): | 49.5 | |
| Stress Rating: | 45.4% | Pass |

Pier and Pad Foundation



BU # : 873645
Site Name: Oxford
App. Number: 552681 Rev. 0

TIA-222 Revision: H
Tower Type: Monopole

Top & Bot. Pad Rein. Different?:
Block Foundation?:
Rectangular Pad?:

| Superstructure Analysis Reactions | | |
|--|---------|---------|
| Compression, P_{comp} : | 36.09 | kips |
| Base Shear, V_{u_comp} : | 24.35 | kips |
| Moment, M_u : | 2664.99 | ft-kips |
| Tower Height, H : | 150 | ft |
| BP Dist. Above Fdn, bp_{dist} : | 3 | in |

| Foundation Analysis Checks | | | | |
|---------------------------------------|----------|---------|---------|-------|
| | Capacity | Demand | Rating* | Check |
| <i>Lateral (Sliding) (kips)</i> | 289.58 | 24.35 | 8.0% | Pass |
| <i>Bearing Pressure (ksf)</i> | 6.61 | 2.10 | 31.8% | Pass |
| <i>Overturning (kip*ft)</i> | 5294.80 | 2853.70 | 53.9% | Pass |
| <i>Pier Flexure (Comp.) (kip*ft)</i> | 6714.17 | 2774.57 | 39.4% | Pass |
| <i>Pier Compression (kip)</i> | 23390.64 | 75.78 | 0.3% | Pass |
| <i>Pad Flexure (kip*ft)</i> | 4415.72 | 938.76 | 20.2% | Pass |
| <i>Pad Shear - 1-way (kips)</i> | 720.43 | 154.66 | 20.4% | Pass |
| <i>Pad Shear - 2-way (Comp) (ksi)</i> | 0.164 | 0.028 | 16.4% | Pass |
| <i>Flexural 2-way (Comp) (kip*ft)</i> | 5938.20 | 1664.74 | 26.7% | Pass |

| Pier Properties | | |
|--|--------|----|
| Pier Shape: | Square | |
| Pier Diameter, dpier : | 7 | ft |
| Ext. Above Grade, E : | 0.5 | ft |
| Pier Rebar Size, Sc : | 11 | |
| Pier Rebar Quantity, mc : | 28 | |
| Pier Tie/Spiral Size, St : | 4 | |
| Pier Tie/Spiral Quantity, mt : | 12 | |
| Pier Reinforcement Type: | Tie | |
| Pier Clear Cover, cc_{pier} : | 3 | in |

*Rating per TIA-222-H Section 15.5

| | |
|---------------------|-------|
| Soil Rating*: | 53.9% |
| Structural Rating*: | 39.4% |

| Pad Properties | | |
|---|------|----|
| Depth, D : | 7 | ft |
| Pad Width, W₁ : | 23.5 | ft |
| Pad Thickness, T : | 3 | ft |
| Pad Rebar Size (Bottom dir. 2), Sp₂ : | 10 | |
| Pad Rebar Quantity (Bottom dir. 2), mp₂ : | 26 | |
| Pad Clear Cover, cc_{pad} : | 3 | in |

| Material Properties | | |
|---|-----|-----|
| Rebar Grade, Fy : | 60 | ksi |
| Concrete Compressive Strength, F'c : | 3 | ksi |
| Dry Concrete Density, δc : | 150 | pcf |

| Soil Properties | | |
|--|-------|---------|
| Total Soil Unit Weight, γ : | 125 | pcf |
| Ultimate Net Bearing, Qnet : | 8.000 | ksf |
| Cohesion, Cu : | 0.000 | ksf |
| Friction Angle, φ : | 30 | degrees |
| SPT Blow Count, N_{blows} : | | |
| Base Friction, μ : | 0.5 | |
| Neglected Depth, N : | 3.50 | ft |
| Foundation Bearing on Rock? | No | |
| Groundwater Depth, gw : | 6 | ft |

<<-Toggle between Gross and Net

Exhibit E

Mount Analysis



Maser Consulting Connecticut
Connecticut Connecticut
2000 Midlantic Drive, Suite 100
Mt. Laurel, NJ 08054
856.797.0412
peter.albano@colliersengineering.com

Antenna Mount Analysis Report and PMI Requirements

Mount Analysis

SMART Tool Project #: 10039620
Maser Consulting Connecticut Project #: 21777125A

May 7, 2021

Site Information

Site ID: 468396-VZW / OXFORD NORTH CT
Site Name: OXFORD NORTH CT
Carrier Name: Verizon Wireless
Address: 691 Oxford Rd.
Oxford, Connecticut 06478
New Haven County
Latitude: 41.447086°
Longitude: -73.152308°

Structure Information

Tower Type: 150-Ft Monopole
Mount Type: 12.50-Ft Platform Mount

FUZE ID # 16272605

Analysis Results

Platform Mount: **88.1% Pass**

***Contractor PMI Requirements:

Included at the end of this MA report

Available & Submitted via portal at <https://pmi.vzwsmart.com>

Contractor - Please Review Specific Site PMI Requirements Upon Award

Requirements also Noted on Mount Modification Drawings

Requirements may also be Noted on A & E drawings

Report Prepared By: Chuanjiao Hu

Executive Summary:

The objective of this report is to determine the capacity of the antenna support mount at the subject facility for the final wireless telecommunications configuration, per the applicable codes and standards. Any modification listed under Sources of Information was assumed completed and was included in this analysis.

This analysis is inclusive of the mount structure only and does not address the structural capacity of the supporting structure. This mounting frame was not analyzed as an anchor attachment point for fall protection. All climbing activities are required to have a fall protection plan completed by a competent person.

Sources of Information:

| Document Type | Remarks |
|--|---|
| <i>Radio Frequency Data Sheet (RFDS)</i> | <i>Verizon RFDS Site ID: 675007, dated February 24, 2021</i> |
| <i>Mount Mapping Report</i> | <i>Hudson Design Group, LLC., Site ID: 468396, dated March 23, 2021</i> |

Analysis Criteria:

| | |
|-------------------------|---|
| Codes and Standards: | ANSI/TIA-222-H |
| Wind Parameters: | Basic Wind Speed (Ultimate 3-sec. Gust), V_{ULT} : 117 mph Ice Wind Speed (3-sec. Gust): 50 mph Design Ice Thickness: 1.00 in Risk Category: II Exposure Category: C Topographic Category: 1 Topographic Feature Considered: N/A Topographic Method: N/A Ground Elevation Factor, K_e : 0.976 |
| Seismic Parameters: | S_s : 0.199 S_1 : 0.054 |
| Maintenance Parameters: | Wind Speed (3-sec. Gust): 30 mph Maintenance Live Load, L_v : 250 lbs. Maintenance Live Load, L_m : 500 lbs. |
| Analysis Software: | RISA-3D (V17) |

Final Loading Configuration:

The following equipment has been considered for the analysis of the mount:

| Mount Elevation (ft) | Equipment Elevation (ft) | Quantity | Manufacturer | Model | Status |
|----------------------|--------------------------|----------|--------------|-------------------|----------|
| 145.50 | 147.00 | 3 | Samsung | MT6407-77A | Added |
| | | 3 | Commscope | CBC78T-DS-43-2X | |
| | | 3 | Samsung | B2/B66A RRH-BR049 | |
| | | 3 | Samsung | B5/B13 RRH-BR04C | |
| | | 6 | Commscope | JAHH-65B-R3B | Retained |
| | | 6 | Antel | LPA-80063/6CF | |
| | | 1 | Raycap | RHSDC-6627-PF-48* | |

* Equipment to be flush mounted directly to the Self Support. They are not mounted on platform mount and are not included in this mount analysis.

Standard Conditions:

1. All engineering services are performed on the basis that the information provided to Maser Consulting Connecticut and used in this analysis is current and correct. The existing equipment loading has been applied at locations determined from the supplied documentation. Any deviation from the loading locations specified in this report shall be communicated to Maser Consulting Connecticut to verify deviation will not adversely impact the analysis.
2. Mounts are assumed to have been properly fabricated, installed and maintained in good condition, twist free and plumb in accordance with its original design and manufacturer’s specifications.

Obvious safety and structural issues/deficiencies noticed at the time of the mount mapping and reported in the Mount Mapping Report are assumed to be corrected and documented as part of the PMI process and are not considered in the mount analysis.

The mount analysis and the mount mapping are not a condition assessment of the mount. Proper maintenance and condition assessments are still required post analysis.

3. For mount analyses completed from other data sources (including new replacement mounts) and not specifically mapped by Maser Consulting Connecticut, the mounts are assumed to have been properly fabricated, installed and maintained in good condition, twist free and plumb in accordance with its original design and manufacturer’s specifications.
4. All member connections are assumed to have been designed to meet or exceed the load carrying capacity of the connected member unless otherwise specified in this report.
5. The mount was checked up to, and including, the bolts that fasten it to the mount collar/attachment and threaded rod connections in collar members if applicable. Local deformation and interaction between the mount collar/attachment and the supporting tower structure are outside the scope of this analysis.
6. All services are performed, results obtained, and recommendations made in accordance with generally accepted engineering principles and practices. Maser Consulting Connecticut is not responsible for the conclusion, opinions, and recommendations made by others based on the information supplied.

7. Structural Steel Grades have been assumed as follows, if applicable, unless otherwise noted in this analysis:
- Channel, Solid Round, Angle, Plate ASTM A36 (Gr. 36)
 - HSS (Rectangular) ASTM 500 (Gr. B-46)
 - Pipe ASTM A53 (Gr. B-35)
 - Threaded Rod F1554 (Gr. 36)
 - Bolts ASTM A325

Discrepancies between in-field conditions and the assumptions listed above may render this analysis invalid unless explicitly approved by Maser Consulting Connecticut.

Analysis Results:

| Component | Utilization % | Pass/Fail |
|----------------------|---------------|-----------|
| Face Horizontal | 28.3 % | Pass |
| Standoff Horizontal | 50.7 % | Pass |
| Platform Crossmember | 24.4 % | Pass |
| Mount Pipe | 74.5 % | Pass |
| Corner Plate | 24.4 % | Pass |
| Grating Support | 21.3 % | Pass |
| Cross Arm Plate | 28.3 % | Pass |
| Support Rail | 39.7 % | Pass |
| Conner Angle | 36.3 % | Pass |
| Mount Connection | 88.1 % | Pass |

| | |
|---|--------------|
| Structure Rating – (Controlling Utilization of all Components) | 88.1% |
|---|--------------|

Recommendation:


The existing mount is **SUFFICIENT** for the final loading configuration and do not require modifications.

ANSI/ASSP rigging plan review services compliant with the requirements of ANSI/TIA 322 are available for a Construction Class IV site or other, if required. Separate review fees will apply.


Attachments:

1. Mount Photos
2. Mount Mapping Report (for reference only)
3. Analysis Calculations
- 4. Contractor Required Post Installation Inspection (PMI) Report Deliverables**
5. Antenna Placement Diagrams
6. TIA Adoption and Wind Speed Usage Letter




| | | | |
|--|--|-------------------------------|--------------|
|  | Antenna Mount Mapping Form (PATENT PENDING) | | FCC # |
| | | | 1235976 |
| Tower Owner: | CROWN CASTLE | Mapping Date: | 3/23/2021 |
| Site Name: | OXFORD NORTH CT | Tower Type: | Monopole |
| Site Number or ID: | 468396 | Tower Height (Ft.): | 150 |
| Mapping Contractor: | HUDSON DESIGN GROUP, LLC. | Mount Elevation (Ft.): | 146.25 |


This antenna mapping form is the property of TES and under **PATENT PENDING**. The formation contained herein is considered confidential in nature and is to be used only for the specific customer it was intended for. Reproduction, transmission, publication, modification or disclosure by any method is prohibited except by express written permission of TES. All means and methods are the responsibility of the contractor and the work shall be compliant with ANSI/ASSE A 10.48, OSHA, FCC, FAA and other safety requirements that may apply. TES is not warranting the usability of the safety climb as it must be assessed prior to each use in compliance with OSHA requirements.

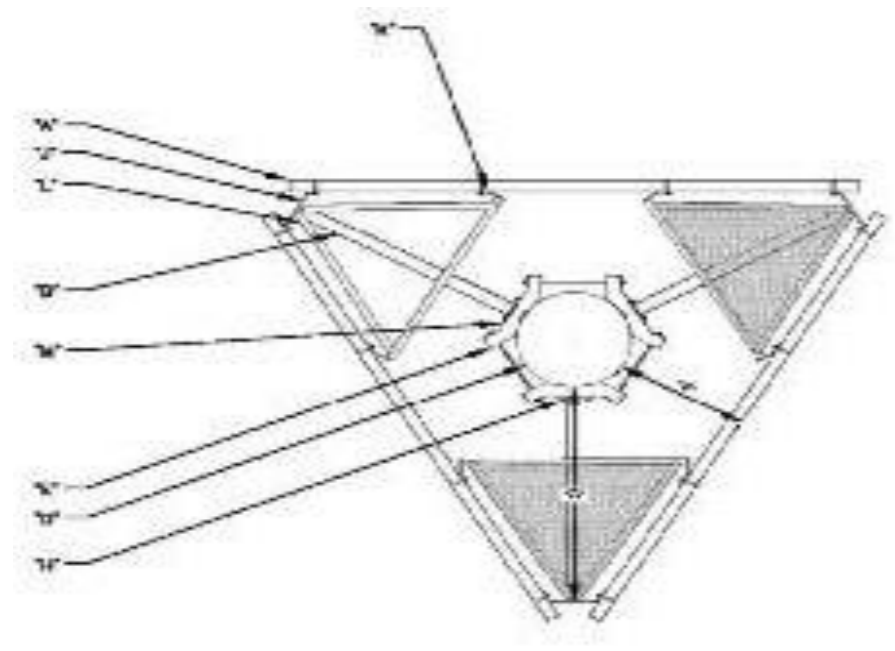

| Mount Pipe Configuration and Geometries [Unit = Inches] | | | | | | | |
|--|--------------------------|---|--------------------------------------|-------------------|--------------------------|-------------------------------|--------------------------------------|
| Sector / Position | Mount Pipe Size & Length | Vertical Offset Dimension "u" | Horizontal Offset "C1, C2, C3, etc." | Sector / Position | Mount Pipe Size & Length | Vertical Offset Dimension "u" | Horizontal Offset "C1, C2, C3, etc." |
| A1 | 2" STD. PIPE X 78" LONG | 54.00 | 5.00 | C1 | 2" STD. PIPE X 78" LONG | 54.00 | 5.00 |
| A2 | 2" STD. PIPE X 78" LONG | 54.00 | 52.00 | C2 | 2" STD. PIPE X 78" LONG | 54.00 | 52.00 |
| A3 | 2" STD. PIPE X 78" LONG | 54.00 | 121.00 | C3 | 2" STD. PIPE X 78" LONG | 54.00 | 121.00 |
| A4 | 2" STD. PIPE X 78" LONG | 54.00 | 145.00 | C4 | 2" STD. PIPE X 78" LONG | 54.00 | 145.00 |
| A5 | | | | C5 | | | |
| A6 | | | | C6 | | | |
| B1 | 2" STD. PIPE X 78" LONG | 54.00 | 5.00 | D1 | | | |
| B2 | 2" STD. PIPE X 78" LONG | 54.00 | 52.00 | D2 | | | |
| B3 | 2" STD. PIPE X 78" LONG | 54.00 | 121.00 | D3 | | | |
| B4 | 2" STD. PIPE X 78" LONG | 54.00 | 145.00 | D4 | | | |
| B5 | | | | D5 | | | |
| B6 | | | | D6 | | | |
| Distance between bottom rail and mount CL elevation (dim d). Unit is inches. See 'Mount Elev Ref' tab for details. : | | | | | | | |
| Distance from top of bottom support rail to lowest tip of ant./eqpt. of Carrier above. (N/A if > 10 ft.) : | | | | | | | |
| Distance from top of bottom support rail to highest tip of ant./eqpt. of Carrier below. (N/A if > 10 ft.) : 5.83 | | | | | | | |
| Please enter additional information or comments below. | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| Tower Face Width at Mount Elev. (ft.): | | Tower Leg Size or Pole Shaft Diameter at Mount Elev. (in.): | | | | 23 | |

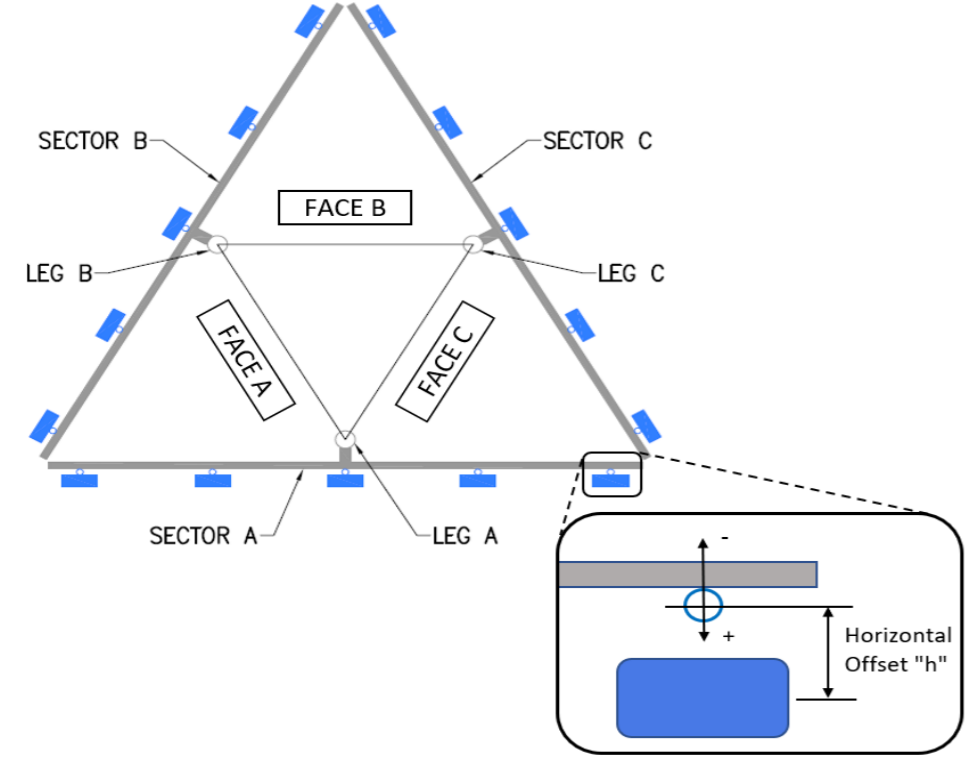


| Ants. Items | Enter antenna model. If not labeled, enter "Unknown". | | | | | | Mounting Locations [Units are inches and degrees] | | | Photos of antennas |
|-------------------|---|-------------|-------------|--------------|-------------------|---------------------------|---|---|---------------------------|--------------------|
| | Antenna Models if Known | Width (in.) | Depth (in.) | Height (in.) | Coax Size and Qty | Antenna Center-line (Ft.) | Vertical Distances "b _{1a} , b _{2a} , b _{3a} , b _{1b} ..." (Inches) | Horiz. Offset "h" (Use "-" if Ant. is behind) | Antenna Azimuth (Degrees) | |
| Sector A | | | | | | | | | | |
| Ant _{1a} | | | | | | | | | | |
| Ant _{1b} | LPA-80063-6CF | 15.00 | 13.00 | 71.00 | | 147.417 | 40.00 | 14.00 | 80.00 | 45,72 |
| Ant _{1c} | | | | | | | | | | |
| Ant _{2a} | | | | | | | | | | |
| Ant _{2b} | (2) JAHH-65B-R3B | 14.00 | 9.00 | 72.00 | | 147.583 | 38.00 | 14.00 | 70.00 | 46,73 |
| Ant _{2c} | | | | | | | | | | |
| Ant _{3a} | B25 RRH 4X30 | 12.00 | 7.00 | 20.50 | | 148.25 | 30.00 | -7.00 | | 47,71 |
| Ant _{3b} | JAHH-65B-R3B | 14.00 | 9.00 | 72.00 | | 148 | 33.00 | 9.50 | 70.00 | 47,74 |
| Ant _{3c} | | | | | | | | | | |
| Ant _{4a} | | | | | | | | | | |
| Ant _{4b} | LPA-80063-6CF | 15.00 | 13.00 | 71.00 | | 147.417 | 40.00 | 14.00 | 80.00 | 48,72 |
| Ant _{4c} | | | | | | | | | | |
| Ant _{5a} | | | | | | | | | | |
| Ant _{5b} | | | | | | | | | | |
| Ant _{5c} | | | | | | | | | | |
| Ant on Standoff | B13 RRH 4X30 | 12.00 | 7.00 | 20.50 | | | | | | 57-59, 61-64 |
| Ant on Standoff | B66a RRH 4X45 | 12.00 | 7.00 | 25.50 | | | | | | 57-59,60 |
| Ant on Tower | | | | | | | | | | |
| Ant on Tower | | | | | | | | | | |

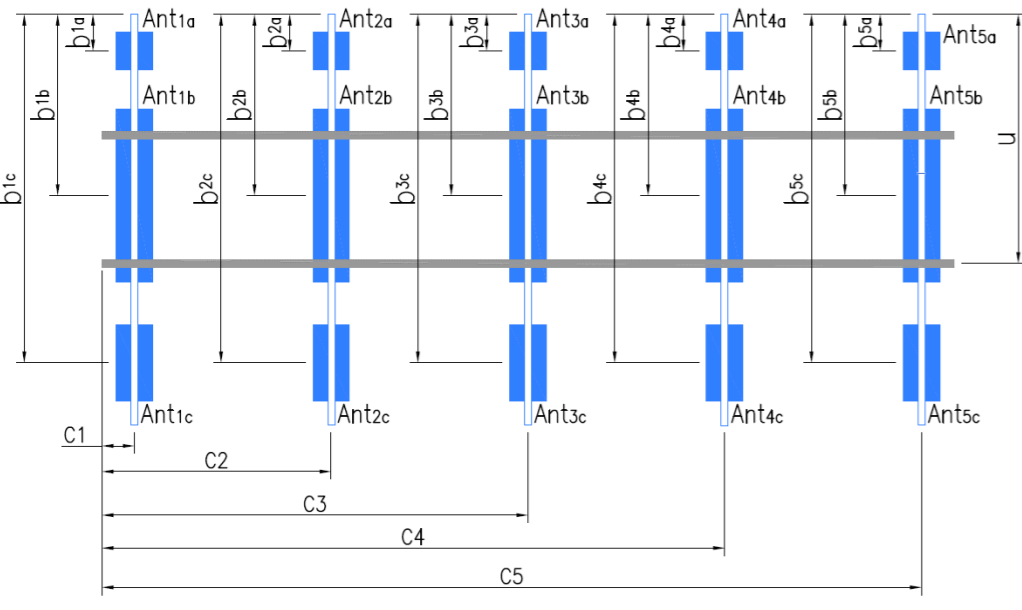

Antenna Layout (Looking Out From Tower)

| Mount Azimuth (Degree) for Each Sector | | | Tower Leg Azimuth (Degree) for Each Sector | | | Sector B | | | | | | | | | | | | | |
|--|-----------------|-----|--|--|-----|-------------------|------------------|-------|-------|-------|--|---------|-------|-------|--------|-------|--|--|--|
| Sector A: | 80.00 | Deg | Leg A: | | Deg | Ant _{1a} | | | | | | | | | | | | | |
| Sector B: | 200.00 | Deg | Leg B: | | Deg | Ant _{1b} | LPA-80063-6CF | 15.00 | 13.00 | 71.00 | | 147.417 | 40.00 | 14.00 | 165.00 | 49,72 | | | |
| Sector C: | 320.00 | Deg | Leg C: | | Deg | Ant _{1c} | | | | | | | | | | | | | |
| Sector D: | | Deg | Leg D: | | Deg | Ant _{2a} | | | | | | | | | | | | | |
| Climbing Facility Information | | | | | | Ant _{2b} | (2) JAHH-65B-R3B | 14.00 | 9.00 | 72.00 | | 147.583 | 38.00 | 14.00 | 190.00 | 50,73 | | | |
| Location: | 145.00 | Deg | N/A | | | Ant _{2c} | | | | | | | | | | | | | |
| Climbing Facility | Corrosion Type: | | Good condition. | | | Ant _{3a} | B25 RRH 4X30 | 12.00 | 7.00 | 20.50 | | 148.25 | 30.00 | -7.00 | | 51,71 | | | |
| | Access: | | Climbing path was unobstructed. | | | Ant _{3b} | JAHH-65B-R3B | 14.00 | 9.00 | 72.00 | | 148 | 33.00 | 9.50 | 190.00 | 51,74 | | | |
| | Condition: | | Good condition. | | | Ant _{3c} | | | | | | | | | | | | | |

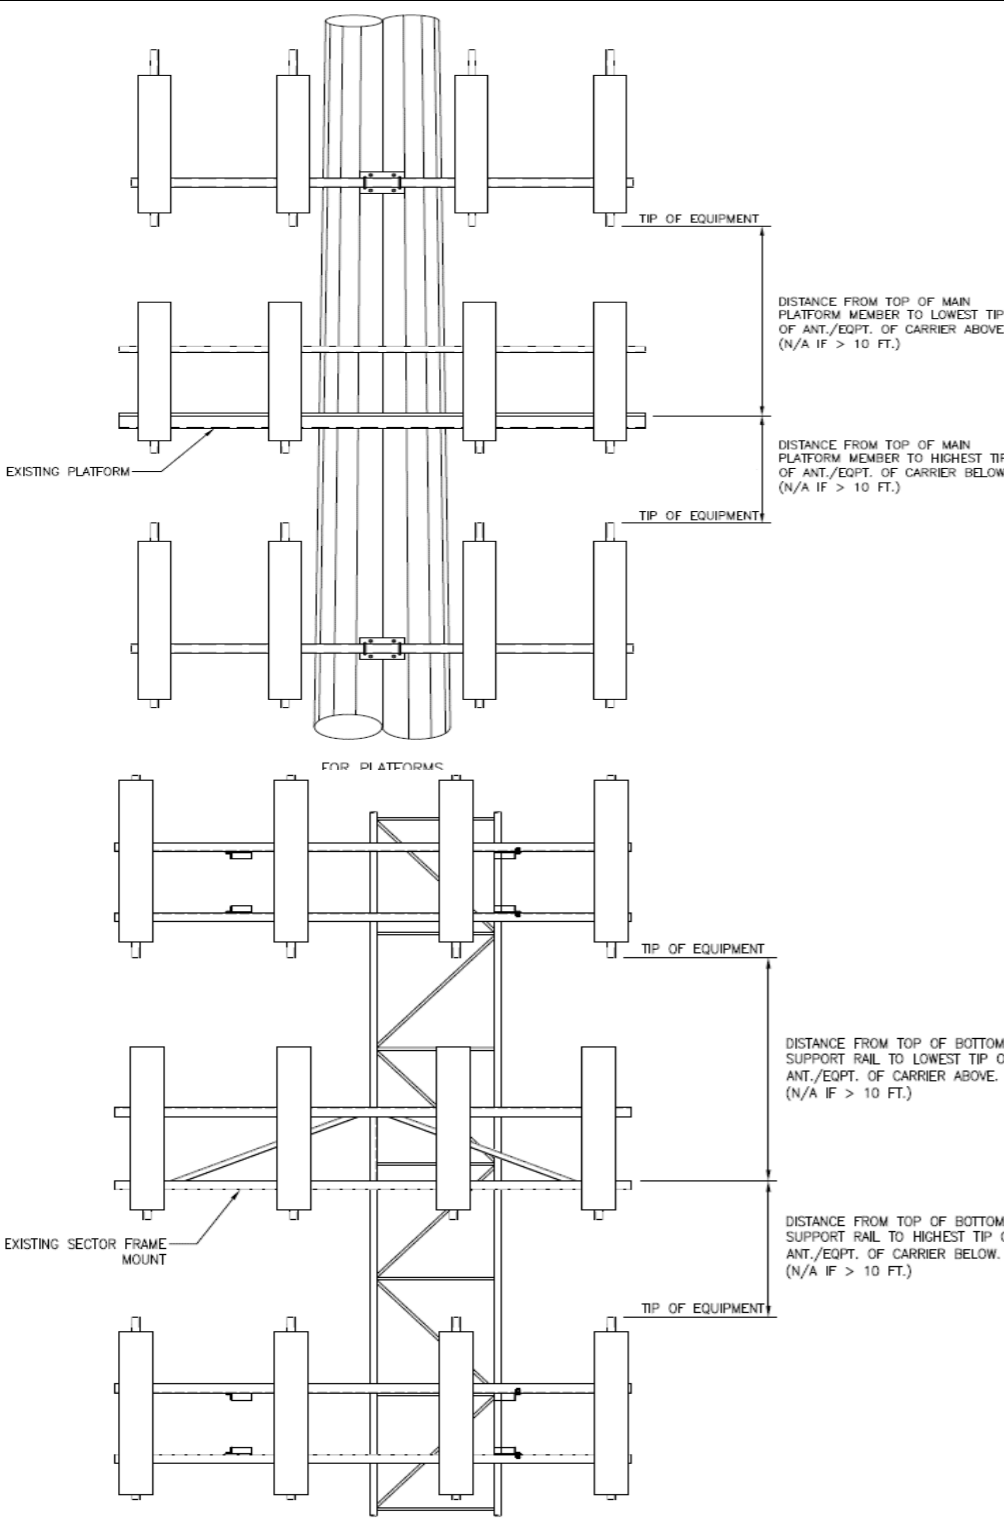

| Sector C | | | | | | | | | | | | | | | | | |
|-------------------|------------------|-------|-------|-------|--|--|---------|-------|-------|--------|--------------|--|--|--|--|--|--|
| Ant _{1a} | | | | | | | | | | | | | | | | | |
| Ant _{1b} | LPA-80063-6CF | 15.00 | 13.00 | 71.00 | | | 147.417 | 40.00 | 14.00 | 335.00 | 53,72 | | | | | | |
| Ant _{1c} | | | | | | | | | | | | | | | | | |
| Ant _{2a} | | | | | | | | | | | | | | | | | |
| Ant _{2b} | (2) JAHH-65B-R3B | 14.00 | 9.00 | 72.00 | | | 147.583 | 38.00 | 14.00 | 310.00 | 54,73 | | | | | | |
| Ant _{2c} | | | | | | | | | | | | | | | | | |
| Ant _{3a} | B25 RRH 4X30 | 12.00 | 7.00 | 20.50 | | | 148.25 | 30.00 | -7.00 | | 56,71 | | | | | | |
| Ant _{3b} | JAHH-65B-R3B | 14.00 | 9.00 | 72.00 | | | 148 | 33.00 | 9.50 | 310.00 | 56,74 | | | | | | |
| Ant _{3c} | | | | | | | | | | | | | | | | | |
| Ant _{4a} | | | | | | | | | | | | | | | | | |
| Ant _{4b} | LPA-80063-6CF | 15.00 | 13.00 | 71.00 | | | 147.417 | 40.00 | 14.00 | 340.00 | 56,72 | | | | | | |
| Ant _{4c} | | | | | | | | | | | | | | | | | |
| Ant _{5a} | | | | | | | | | | | | | | | | | |
| Ant _{5b} | | | | | | | | | | | | | | | | | |
| Ant _{5c} | | | | | | | | | | | | | | | | | |
| Ant on Standoff | B13 RRH 4X30 | 12.00 | 7.00 | 20.50 | | | | | | | 57-59, 61-64 | | | | | | |
| Ant on Standoff | B66a RRH 4X45 | 12.00 | 7.00 | 25.50 | | | | | | | 57-59,60 | | | | | | |
| Ant on Tower | | | | | | | | | | | | | | | | | |
| Ant on Tower | | | | | | | | | | | | | | | | | |
| Ant on Tower | OVP | 15.00 | 10.00 | 28.00 | | | | | | | 68-70 | | | | | | |
| Ant on Tower | | | | | | | | | | | | | | | | | |

| Sector D | | | | | | | | | | | | | | | | | |
|-------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| Ant _{1a} | | | | | | | | | | | | | | | | | |
| Ant _{1b} | | | | | | | | | | | | | | | | | |
| Ant _{1c} | | | | | | | | | | | | | | | | | |
| Ant _{2a} | | | | | | | | | | | | | | | | | |
| Ant _{2b} | | | | | | | | | | | | | | | | | |
| Ant _{2c} | | | | | | | | | | | | | | | | | |
| Ant _{3a} | | | | | | | | | | | | | | | | | |
| Ant _{3b} | | | | | | | | | | | | | | | | | |
| Ant _{3c} | | | | | | | | | | | | | | | | | |
| Ant _{4a} | | | | | | | | | | | | | | | | | |
| Ant _{4b} | | | | | | | | | | | | | | | | | |
| Ant _{4c} | | | | | | | | | | | | | | | | | |
| Ant _{5a} | | | | | | | | | | | | | | | | | |
| Ant _{5b} | | | | | | | | | | | | | | | | | |
| Ant _{5c} | | | | | | | | | | | | | | | | | |
| Ant on Standoff | | | | | | | | | | | | | | | | | |
| Ant on Standoff | | | | | | | | | | | | | | | | | |
| Ant on Tower | | | | | | | | | | | | | | | | | |
| Ant on Tower | | | | | | | | | | | | | | | | | |

Observed Safety and Structural Issues During the Mount Mapping

| Issue # | Description of Issue | Photo # |
|---------|----------------------|---------|
| | | |
| | | |
| | | |
| | | |
| | | |


| | | |
|---|--------------------------------------|---------|
| 1 | | |
| 2 | (7) 1-5/8"Ø COAX, (1) 1-1/4"Ø HYBRID | 103-107 |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |
| 7 | | |
| 8 | | |

Mapping Notes

1. Please report any visible structural or safety issues observed on the antenna mounts (Damaged members, loose connections, tilting mounts, safety climb issues, etc.)
2. If the thickness of the existing pipes or tubing can't be obtained from a general tool (such as Caliper), please use an ultrasonic measurement tool (thickness gauge) to measure the thickness.
3. Please create all required detail sketches of the mounts and insert them into the "Sketches" tab.
4. Please measure and enter the bolt sizes and types under the Members Box in the spreadsheet of the mount type.
5. Take and label the photos of the tower, mounts, connections, antennas and all measurements. Minimum 50 photos are required.
6. Please measure and report the size and length of all existing antenna mounting pipes.
7. Please measure and report the antenna information for all sectors.
8. Don't delete or rearrange any sheet or contents of any sheet from this mapping form.


Standard Conditions


1. Obvious safety and structural issues/deficiencies noticed at the time of the mount mapping are to be reported in this mapping. However, this mount mapping is not a condition assessment of the mount.

|  | Antenna Mount Mapping Form (PATENT PENDING) | | | FCC # |
|--|---|------------------------|---------------------|-----------|
| | | | | 1235976 |
| | Tower Owner: | CROWN CASTLE | Mapping Date: | 3/23/2021 |
| | Site Name: | OXFORD NORTH CT | Tower Type: | Monopole |
| | Site Number or ID: | 468396 | Tower Height (Ft.): | 150 |
| Mapping Contractor: | HUDSON DESIGN GROUP, LLC. | Mount Elevation (Ft.): | 146.25 | |


This antenna mapping form is the property of TES and under **PATENT PENDING**. The formation contained herein is considered confidential in nature and is to be used only for the specific customer it was intended for. Reproduction, transmission, publication, modification or disclosure by any method is prohibited except by express written permission of TES. All means and methods are the responsibility of the contractor and the work shall be compliant with ANSI/ASSE A 10.48, OSHA, FCC, FAA and other safety requirements that may apply. TES is not warranting the usability of the safety climb as it must be assessed prior to each use in compliance with OSHA requirements.

Please Insert Sketches of the Antenna Mount

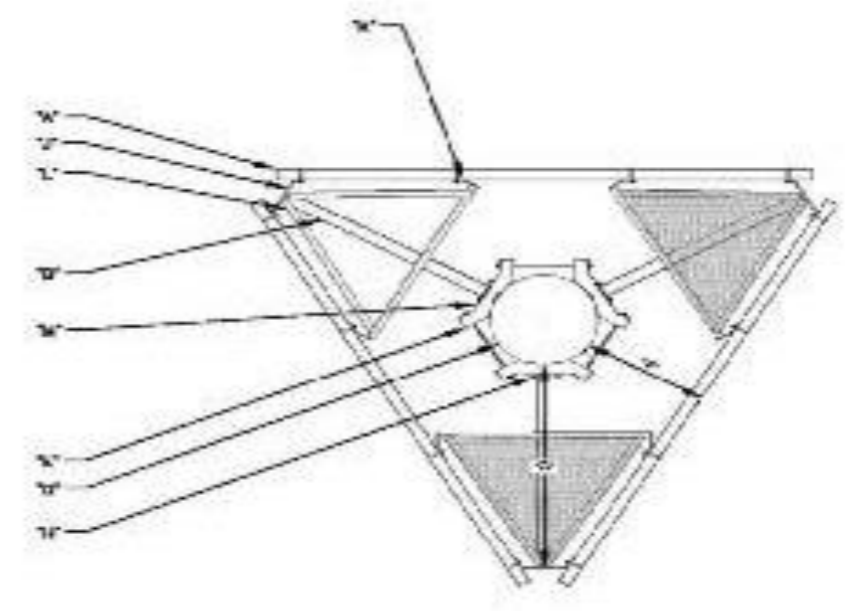
| MOUNT MAPPING CHECKLIST | | | | | |
|--|--------------------------|--|--|-------------|-----------------|
| CARRIER: | COLLIER | SITE #: | | SITE NAME: | Oxford North CT |
| DATE: | 3/23/2021 | MAPPED BY: | JC | SITE OWNER: | CROWN CASTLE |
| DESCRIPTION | STATUS | Value | Legend | | |
| A: FACE PIPE CONFIG. SIZE LENGTH | <input type="checkbox"/> | 3-1/2" 150" |  | | |
| B: STAND OFF SIZE | <input type="checkbox"/> | 4x4x3/16" | | | |
| C: ANTENNA PIPE MAST DIA. LENGTH | <input type="checkbox"/> | 2-3/8" 78" | | | |
| D: MONOPOLE DIA. | <input type="checkbox"/> | 23" | | | |
| E: RINGMOUNT | <input type="checkbox"/> | 10" x 3/8" | | | |
| F: TOWER TO FACE | <input type="checkbox"/> | 37" | | | |
| G: TOWER TO APEX | <input type="checkbox"/> | 69" | | | |
| H: HARDWARE | <input type="checkbox"/> | 5/8"Ø | | | |
| I: U-BOLTS | <input type="checkbox"/> | 1/2"Ø | | | |
| J: A PLATE | <input type="checkbox"/> | 6"x 12.5" x 3" x 1/2" | | | |
| K: B PLATE | <input type="checkbox"/> | 6" x 5" x 3.5" x 3/8" | | | |
| L: ANGLE | <input type="checkbox"/> | 2" x 2" x 3/16" | | | |
| M: MOUNTING PLATE | <input type="checkbox"/> | 10x10x5/8 | | | |
| N: ALPHA POS 1 | <input type="checkbox"/> | LPA-80063-6CF | | | |
| ALPHA POS 2 | <input type="checkbox"/> | (2) JAHH-65B-R3B | | | |
| ALPHA POS 3 | <input type="checkbox"/> | (Spare) JAHH-65B-R3B | | | |
| ALPHA POS 4 | <input type="checkbox"/> | LPA-80063-6CF | | | |
| ALPHA POS 5 | | | | | |
| O: BETA POS 1 | <input type="checkbox"/> | LPA-80063-6CF | | | |
| BETA POS 2 | <input type="checkbox"/> | (2) JAHH-65B-R3B | | | |
| BETA POS 3 | <input type="checkbox"/> | (Spare) JAHH-65B-R3B | | | |
| BETA POS 4 | <input type="checkbox"/> | LPA-80063-6CF | | | |
| BETA POS 5 | | | | | |
| P: GAMMA POS 1 | <input type="checkbox"/> | LPA-80063-6CF | <p style="text-align: center;">ELEVATION</p> | | |
| GAMMA POS 2 | <input type="checkbox"/> | (2) JAHH-65B-R3B | | | |
| GAMMA POS 3 | <input type="checkbox"/> | (Spare) JAHH-65B-R3B | | | |
| GAMMA POS 4 | <input type="checkbox"/> | LPA-80063-6CF | | | |
| GAMMA POS 5 | | | | | |
| Q: TMA | <input type="checkbox"/> | None | <p style="text-align: center;">FACE SKETCH</p> | | |
| R: RADIOS | | (3) UHIE, B664 RRH 4x45 - (3) B13 RRH 4x30 - (0) | | | |
| S: SURGE | <input type="checkbox"/> | (1) OVP banded to tower | | | |
| T: SECOND MOUNT | <input type="checkbox"/> | None | | | |
| COMMENTS: | Mount CL: 146' 3" to Pad | | | | |

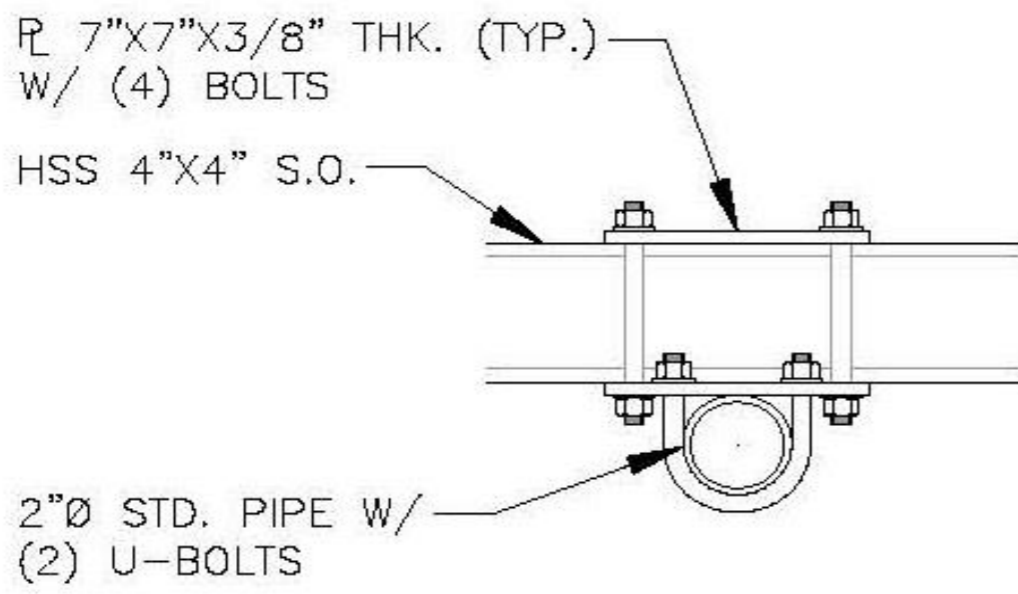


S.O. MOUNT DETAIL

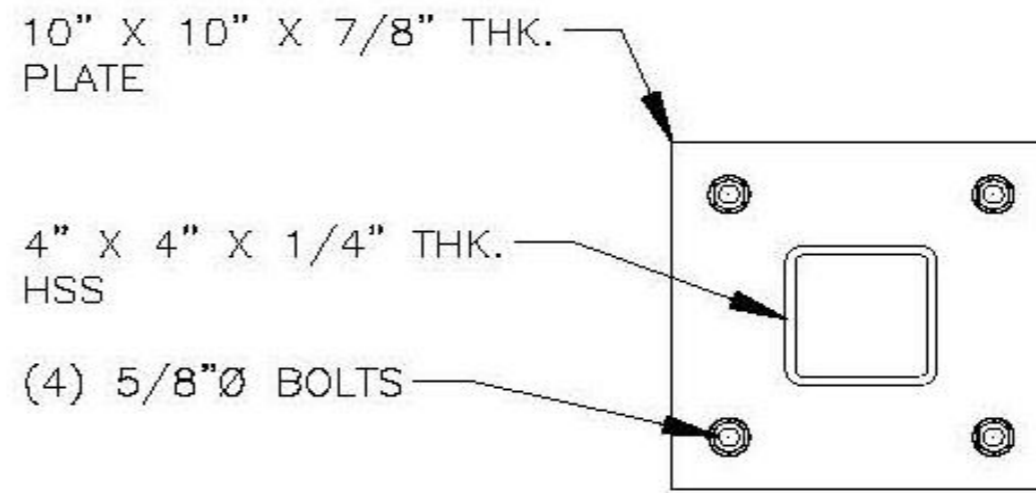


DETAIL M

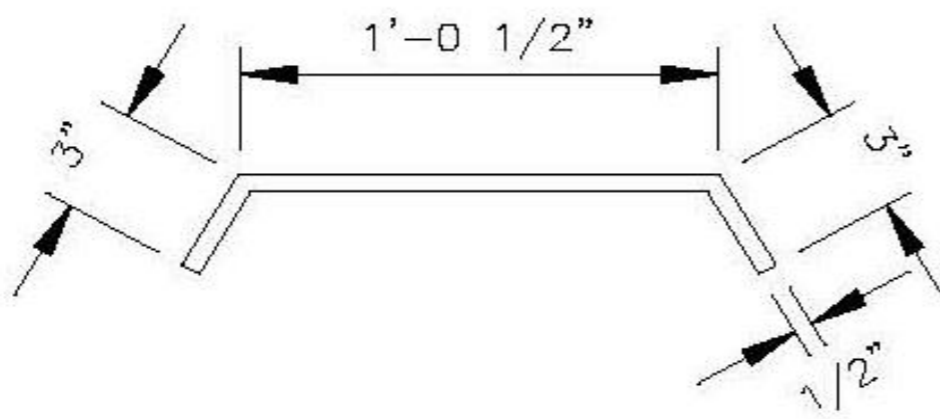


DETAIL J

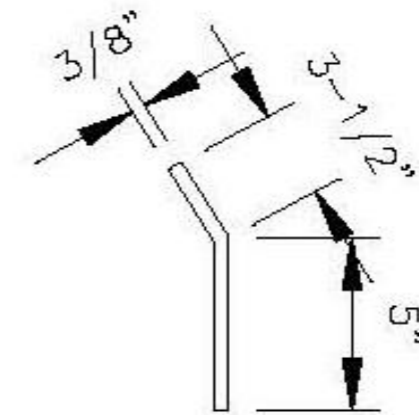


DETAIL K

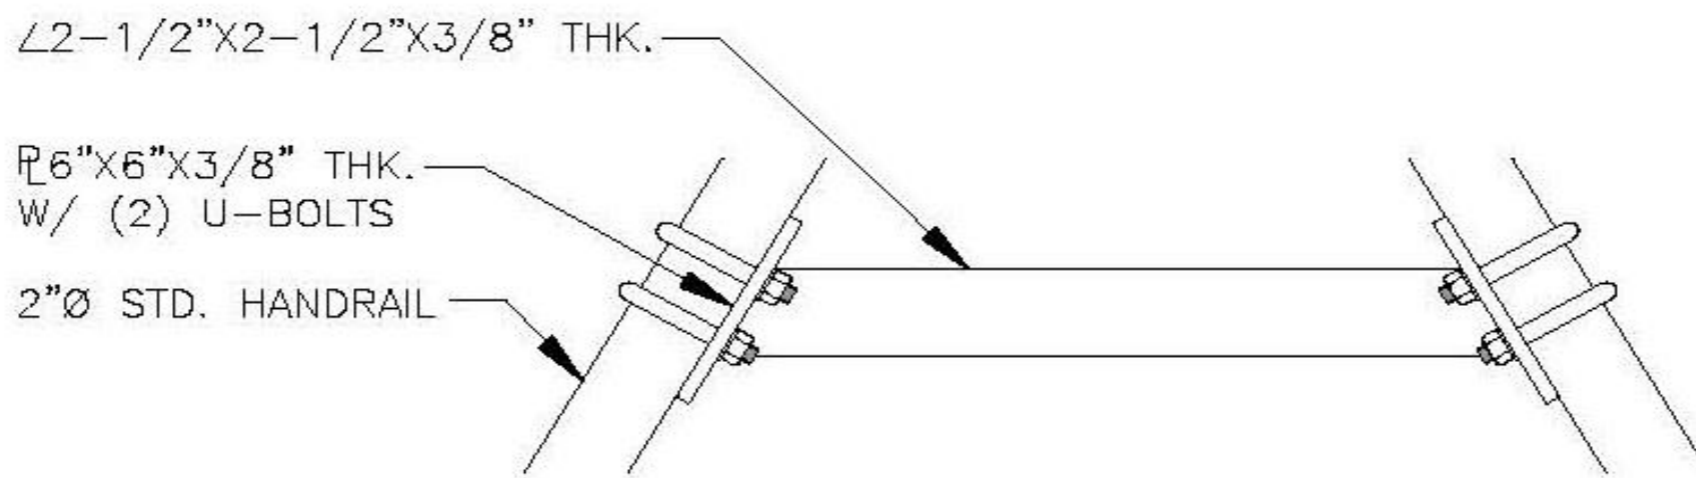


HANDRAIL APEX SUPPORT DETAIL

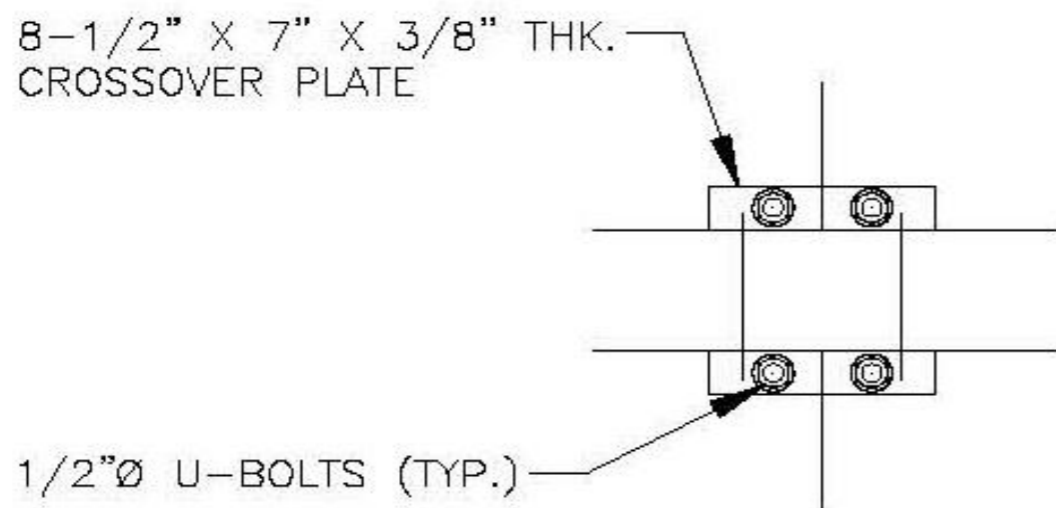

CROSSOVER PLATE DETAIL (H.R.)

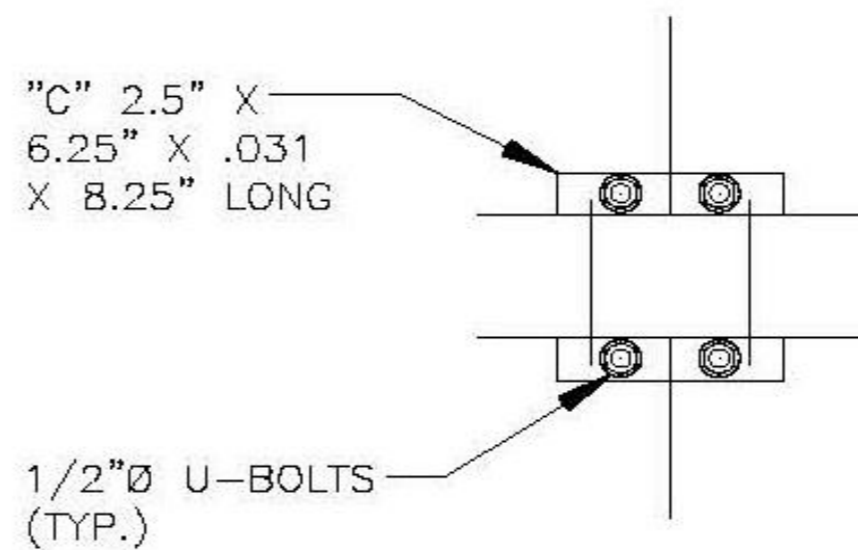


CROSSOVER PLATE DETAIL (PLATFORM)

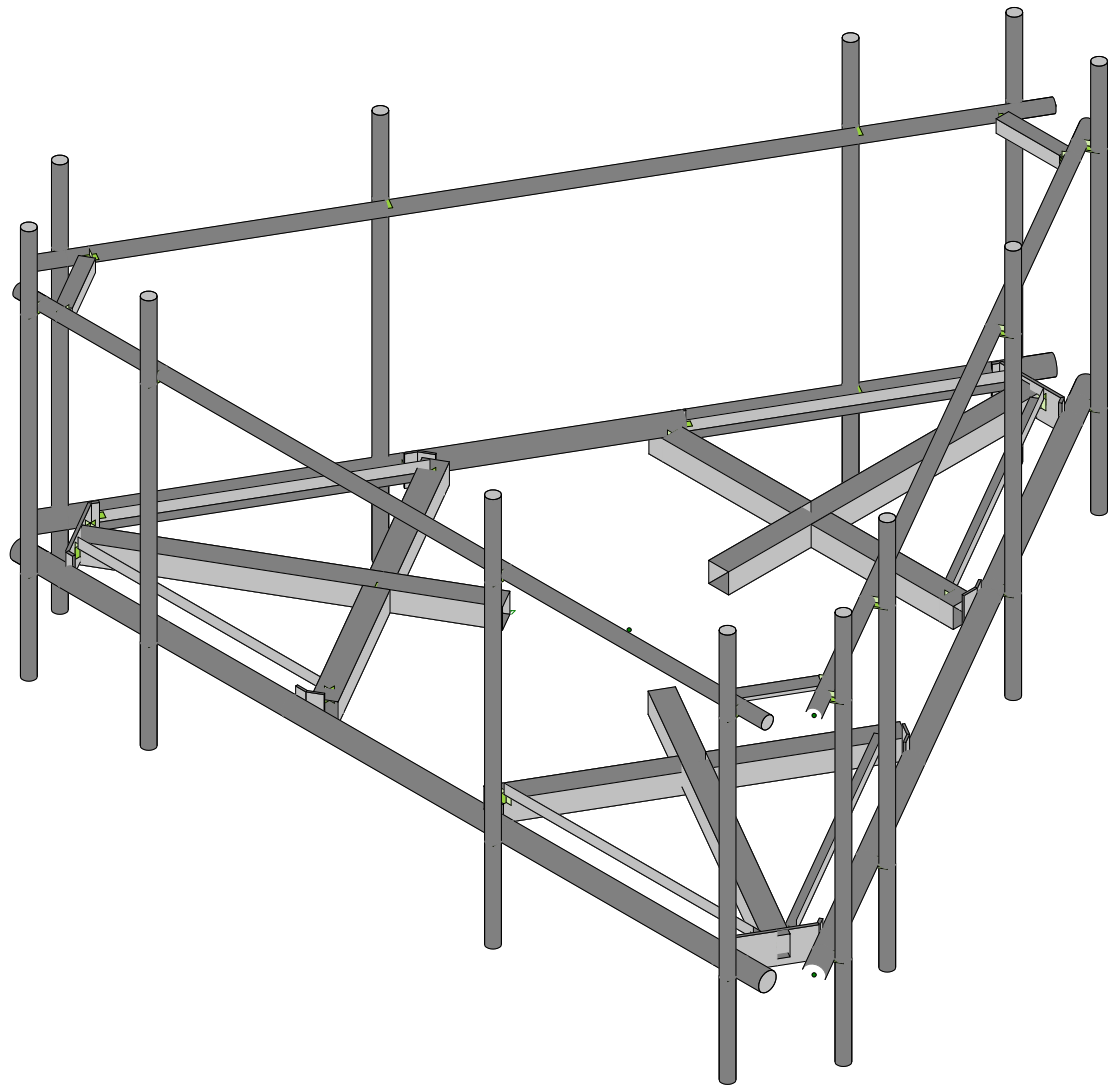


Envelope Only Solution

| | | |
|--|--|-------------------------|
| | | SK - 1 |
| | | May 7, 2021 at 11:28 AM |
| | | 468396-VZW_MT_LO_H.r3d |

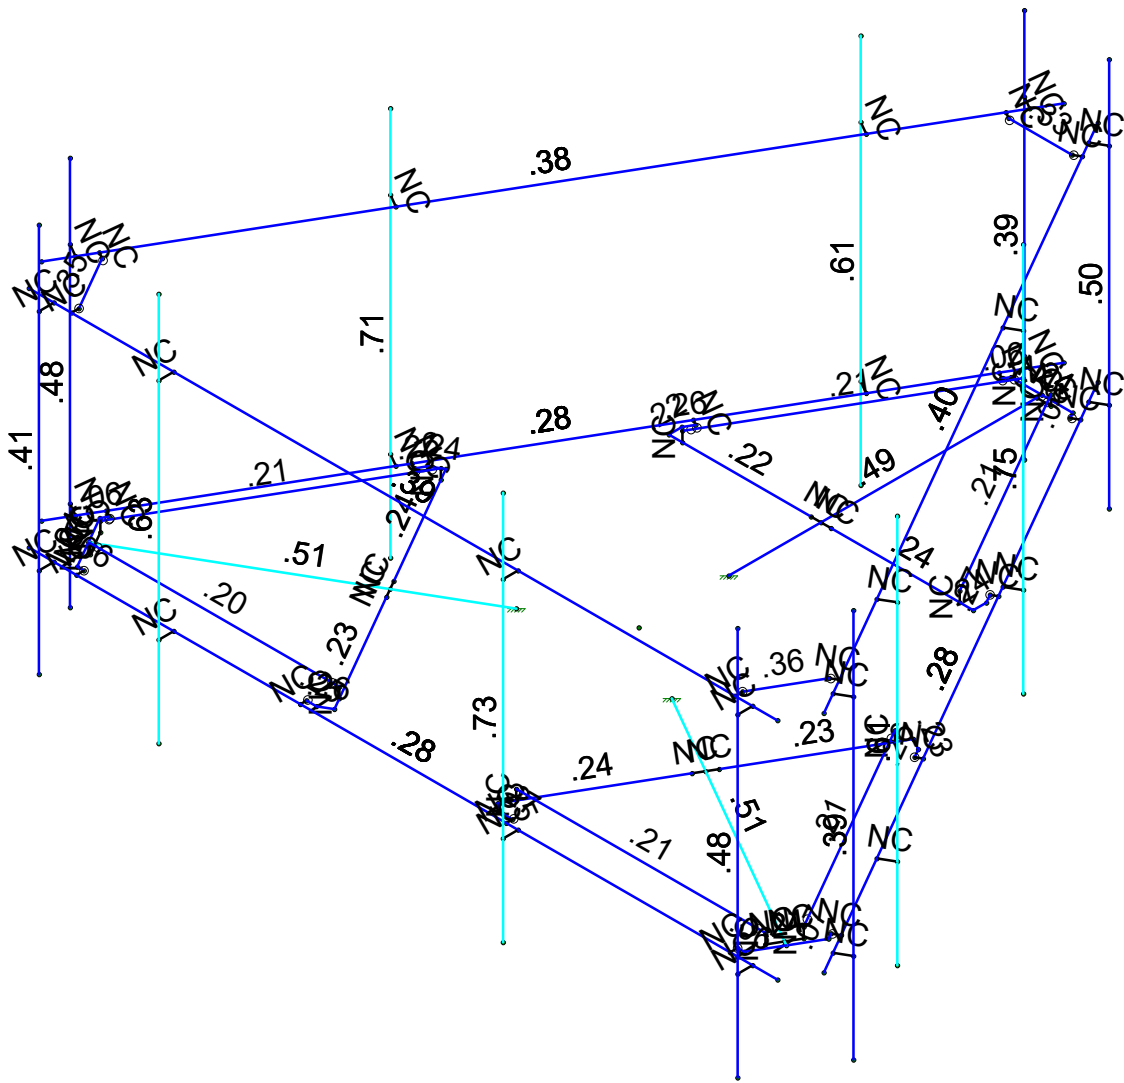

Member Code Checks Displayed (Enveloped)
Envelope Only Solution

| | | |
|--|--|-------------------------|
| | | SK - 2 |
| | | May 7, 2021 at 11:28 AM |
| | | 468396-VZW_MT_LO_H.r3d |

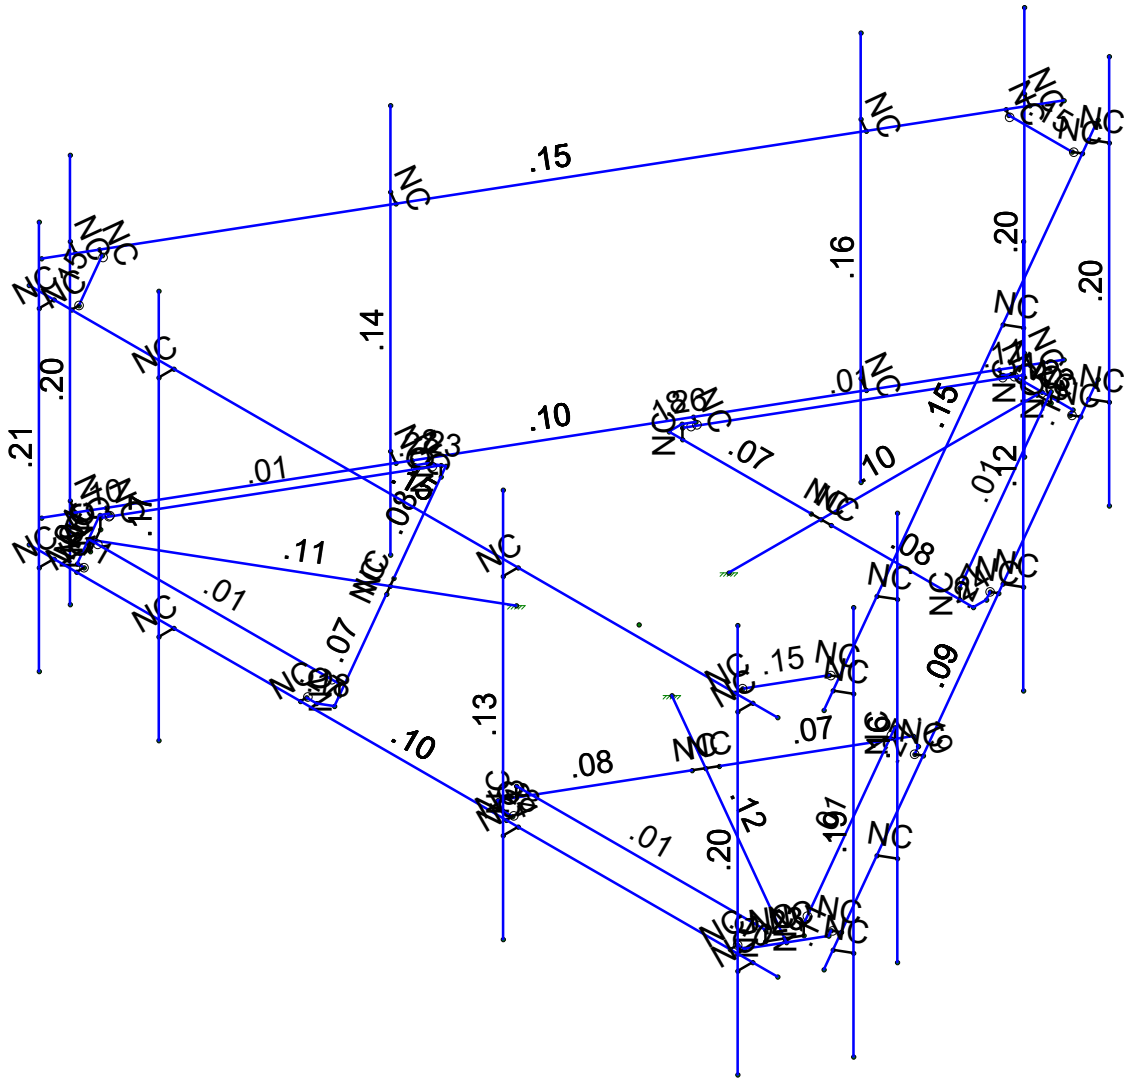

Member Shear Checks Displayed (Enveloped)
Envelope Only Solution

| | | |
|--|--|-------------------------|
| | | SK - 3 |
| | | May 7, 2021 at 11:28 AM |
| | | 468396-VZW_MT_LO_H.r3d |

Basic Load Cases

| | BLC Description | Category | X Gravity | Y Gravity | Z Gravity | Joint | Point | Distribut... | Area(Me... | Surface(Pl... |
|----|------------------------|----------|-----------|-----------|-----------|-------|-------|--------------|------------|---------------|
| 1 | Antenna D | None | | | | | 117 | | | |
| 2 | Antenna Di | None | | | | | 117 | | | |
| 3 | Antenna Wo (0 Deg) | None | | | | | 117 | | | |
| 4 | Antenna Wo (30 Deg) | None | | | | | 117 | | | |
| 5 | Antenna Wo (60 Deg) | None | | | | | 117 | | | |
| 6 | Antenna Wo (90 Deg) | None | | | | | 117 | | | |
| 7 | Antenna Wo (120 Deg) | None | | | | | 117 | | | |
| 8 | Antenna Wo (150 Deg) | None | | | | | 117 | | | |
| 9 | Antenna Wo (180 Deg) | None | | | | | 117 | | | |
| 10 | Antenna Wo (210 Deg) | None | | | | | 117 | | | |
| 11 | Antenna Wo (240 Deg) | None | | | | | 117 | | | |
| 12 | Antenna Wo (270 Deg) | None | | | | | 117 | | | |
| 13 | Antenna Wo (300 Deg) | None | | | | | 117 | | | |
| 14 | Antenna Wo (330 Deg) | None | | | | | 117 | | | |
| 15 | Antenna Wi (0 Deg) | None | | | | | 117 | | | |
| 16 | Antenna Wi (30 Deg) | None | | | | | 117 | | | |
| 17 | Antenna Wi (60 Deg) | None | | | | | 117 | | | |
| 18 | Antenna Wi (90 Deg) | None | | | | | 117 | | | |
| 19 | Antenna Wi (120 Deg) | None | | | | | 117 | | | |
| 20 | Antenna Wi (150 Deg) | None | | | | | 117 | | | |
| 21 | Antenna Wi (180 Deg) | None | | | | | 117 | | | |
| 22 | Antenna Wi (210 Deg) | None | | | | | 117 | | | |
| 23 | Antenna Wi (240 Deg) | None | | | | | 117 | | | |
| 24 | Antenna Wi (270 Deg) | None | | | | | 117 | | | |
| 25 | Antenna Wi (300 Deg) | None | | | | | 117 | | | |
| 26 | Antenna Wi (330 Deg) | None | | | | | 117 | | | |
| 27 | Antenna Wm (0 Deg) | None | | | | | 117 | | | |
| 28 | Antenna Wm (30 Deg) | None | | | | | 117 | | | |
| 29 | Antenna Wm (60 Deg) | None | | | | | 117 | | | |
| 30 | Antenna Wm (90 Deg) | None | | | | | 117 | | | |
| 31 | Antenna Wm (120 Deg) | None | | | | | 117 | | | |
| 32 | Antenna Wm (150 Deg) | None | | | | | 117 | | | |
| 33 | Antenna Wm (180 Deg) | None | | | | | 117 | | | |
| 34 | Antenna Wm (210 Deg) | None | | | | | 117 | | | |
| 35 | Antenna Wm (240 Deg) | None | | | | | 117 | | | |
| 36 | Antenna Wm (270 Deg) | None | | | | | 117 | | | |
| 37 | Antenna Wm (300 Deg) | None | | | | | 117 | | | |
| 38 | Antenna Wm (330 Deg) | None | | | | | 117 | | | |
| 39 | Structure D | None | | -1 | | | | | 3 | |
| 40 | Structure Di | None | | | | | | 57 | 3 | |
| 41 | Structure Wo (0 Deg) | None | | | | | | 114 | | |
| 42 | Structure Wo (30 Deg) | None | | | | | | 114 | | |
| 43 | Structure Wo (60 Deg) | None | | | | | | 114 | | |
| 44 | Structure Wo (90 Deg) | None | | | | | | 114 | | |
| 45 | Structure Wo (120 Deg) | None | | | | | | 114 | | |
| 46 | Structure Wo (150 Deg) | None | | | | | | 114 | | |
| 47 | Structure Wo (180 Deg) | None | | | | | | 114 | | |
| 48 | Structure Wo (210 Deg) | None | | | | | | 114 | | |
| 49 | Structure Wo (240 Deg) | None | | | | | | 114 | | |
| 50 | Structure Wo (270 Deg) | None | | | | | | 114 | | |
| 51 | Structure Wo (300 Deg) | None | | | | | | 114 | | |
| 52 | Structure Wo (330 Deg) | None | | | | | | 114 | | |
| 53 | Structure Wi (0 Deg) | None | | | | | | 114 | | |
| 54 | Structure Wi (30 Deg) | None | | | | | | 114 | | |
| 55 | Structure Wi (60 Deg) | None | | | | | | 114 | | |
| 56 | Structure Wi (90 Deg) | None | | | | | | 114 | | |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Basic Load Cases (Continued)

| | BLC Description | Category | X Gravity | Y Gravity | Z Gravity | Joint | Point | Distribut... | Area(Me... | Surface(Pl... |
|----|-----------------------------|----------|-----------|-----------|-----------|-------|-------|--------------|------------|---------------|
| 57 | Structure Wi (120 Deg) | None | | | | | | | 114 | |
| 58 | Structure Wi (150 Deg) | None | | | | | | | 114 | |
| 59 | Structure Wi (180 Deg) | None | | | | | | | 114 | |
| 60 | Structure Wi (210 Deg) | None | | | | | | | 114 | |
| 61 | Structure Wi (240 Deg) | None | | | | | | | 114 | |
| 62 | Structure Wi (270 Deg) | None | | | | | | | 114 | |
| 63 | Structure Wi (300 Deg) | None | | | | | | | 114 | |
| 64 | Structure Wi (330 Deg) | None | | | | | | | 114 | |
| 65 | Structure Wm (0 Deg) | None | | | | | | | 114 | |
| 66 | Structure Wm (30 Deg) | None | | | | | | | 114 | |
| 67 | Structure Wm (60 Deg) | None | | | | | | | 114 | |
| 68 | Structure Wm (90 Deg) | None | | | | | | | 114 | |
| 69 | Structure Wm (120 Deg) | None | | | | | | | 114 | |
| 70 | Structure Wm (150 Deg) | None | | | | | | | 114 | |
| 71 | Structure Wm (180 Deg) | None | | | | | | | 114 | |
| 72 | Structure Wm (210 Deg) | None | | | | | | | 114 | |
| 73 | Structure Wm (240 Deg) | None | | | | | | | 114 | |
| 74 | Structure Wm (270 Deg) | None | | | | | | | 114 | |
| 75 | Structure Wm (300 Deg) | None | | | | | | | 114 | |
| 76 | Structure Wm (330 Deg) | None | | | | | | | 114 | |
| 77 | Lm1 | None | | | | | 1 | | | |
| 78 | Lm2 | None | | | | | 1 | | | |
| 79 | Lv1 | None | | | | | 1 | | | |
| 80 | Lv2 | None | | | | | 1 | | | |
| 81 | BLC 39 Transient Area Loads | None | | | | | | | 30 | |
| 82 | BLC 40 Transient Area Loads | None | | | | | | | 30 | |

Load Combinations

| | Description | Solve | PDelta | SR... | BLC | F... | B...Fac... | BLC | Factor | B...F... | B...F... | B...F... | B...F... | B...F... | B...F... | B...F... | B...F... |
|----|----------------------------|-------|--------|-------|-----|------|------------|-----|--------|----------|----------|----------|----------|----------|----------|----------|----------|
| 1 | 1.2D+1.0Wo (0 Deg) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 3 | 1 | 41 | 1 | | | | | |
| 2 | 1.2D+1.0Wo (30 Deg) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 4 | 1 | 42 | 1 | | | | | |
| 3 | 1.2D+1.0Wo (60 Deg) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 5 | 1 | 43 | 1 | | | | | |
| 4 | 1.2D+1.0Wo (90 Deg) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 6 | 1 | 44 | 1 | | | | | |
| 5 | 1.2D+1.0Wo (120 Deg) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 7 | 1 | 45 | 1 | | | | | |
| 6 | 1.2D+1.0Wo (150 Deg) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 8 | 1 | 46 | 1 | | | | | |
| 7 | 1.2D+1.0Wo (180 Deg) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 9 | 1 | 47 | 1 | | | | | |
| 8 | 1.2D+1.0Wo (210 Deg) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 10 | 1 | 48 | 1 | | | | | |
| 9 | 1.2D+1.0Wo (240 Deg) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 11 | 1 | 49 | 1 | | | | | |
| 10 | 1.2D+1.0Wo (270 Deg) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 12 | 1 | 50 | 1 | | | | | |
| 11 | 1.2D+1.0Wo (300 Deg) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 13 | 1 | 51 | 1 | | | | | |
| 12 | 1.2D+1.0Wo (330 Deg) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 14 | 1 | 52 | 1 | | | | | |
| 13 | 1.2D + 1.0Di + 1.0Wi (...) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 2 | 1 | 40 | 1 | 15 | 1 | 53 | 1 | |
| 14 | 1.2D + 1.0Di + 1.0Wi (...) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 2 | 1 | 40 | 1 | 16 | 1 | 54 | 1 | |
| 15 | 1.2D + 1.0Di + 1.0Wi (...) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 2 | 1 | 40 | 1 | 17 | 1 | 55 | 1 | |
| 16 | 1.2D + 1.0Di + 1.0Wi (...) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 2 | 1 | 40 | 1 | 18 | 1 | 56 | 1 | |
| 17 | 1.2D + 1.0Di + 1.0Wi (...) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 2 | 1 | 40 | 1 | 19 | 1 | 57 | 1 | |
| 18 | 1.2D + 1.0Di + 1.0Wi (...) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 2 | 1 | 40 | 1 | 20 | 1 | 58 | 1 | |
| 19 | 1.2D + 1.0Di + 1.0Wi (...) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 2 | 1 | 40 | 1 | 21 | 1 | 59 | 1 | |
| 20 | 1.2D + 1.0Di + 1.0Wi (...) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 2 | 1 | 40 | 1 | 22 | 1 | 60 | 1 | |
| 21 | 1.2D + 1.0Di + 1.0Wi (...) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 2 | 1 | 40 | 1 | 23 | 1 | 61 | 1 | |
| 22 | 1.2D + 1.0Di + 1.0Wi (...) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 2 | 1 | 40 | 1 | 24 | 1 | 62 | 1 | |
| 23 | 1.2D + 1.0Di + 1.0Wi (...) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 2 | 1 | 40 | 1 | 25 | 1 | 63 | 1 | |
| 24 | 1.2D + 1.0Di + 1.0Wi (...) | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 2 | 1 | 40 | 1 | 26 | 1 | 64 | 1 | |
| 25 | 1.2D + 1.5Lm1 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 77 | 1.5 | 27 | 1 | 65 | 1 | | | |
| 26 | 1.2D + 1.5Lm1 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 77 | 1.5 | 28 | 1 | 66 | 1 | | | |

Load Combinations (Continued)

| | Description | Solve | PDelta | SR | BLC | F... | B... | Fac... | BLC | Factor | B... | F... | B... | F... | B... | F... | B... | F... | B... | F... | |
|----|----------------------------|-------|--------|----|-----|------|------|--------|-----|--------|------|------|------|-------|------|------|------|------|------|------|--|
| 27 | 1.2D + 1.5Lm1 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 77 | 1.5 | 29 | 1 | 67 | 1 | | | | | | | |
| 28 | 1.2D + 1.5Lm1 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 77 | 1.5 | 30 | 1 | 68 | 1 | | | | | | | |
| 29 | 1.2D + 1.5Lm1 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 77 | 1.5 | 31 | 1 | 69 | 1 | | | | | | | |
| 30 | 1.2D + 1.5Lm1 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 77 | 1.5 | 32 | 1 | 70 | 1 | | | | | | | |
| 31 | 1.2D + 1.5Lm1 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 77 | 1.5 | 33 | 1 | 71 | 1 | | | | | | | |
| 32 | 1.2D + 1.5Lm1 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 77 | 1.5 | 34 | 1 | 72 | 1 | | | | | | | |
| 33 | 1.2D + 1.5Lm1 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 77 | 1.5 | 35 | 1 | 73 | 1 | | | | | | | |
| 34 | 1.2D + 1.5Lm1 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 77 | 1.5 | 36 | 1 | 74 | 1 | | | | | | | |
| 35 | 1.2D + 1.5Lm1 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 77 | 1.5 | 37 | 1 | 75 | 1 | | | | | | | |
| 36 | 1.2D + 1.5Lm1 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 77 | 1.5 | 38 | 1 | 76 | 1 | | | | | | | |
| 37 | 1.2D + 1.5Lm2 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 78 | 1.5 | 27 | 1 | 65 | 1 | | | | | | | |
| 38 | 1.2D + 1.5Lm2 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 78 | 1.5 | 28 | 1 | 66 | 1 | | | | | | | |
| 39 | 1.2D + 1.5Lm2 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 78 | 1.5 | 29 | 1 | 67 | 1 | | | | | | | |
| 40 | 1.2D + 1.5Lm2 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 78 | 1.5 | 30 | 1 | 68 | 1 | | | | | | | |
| 41 | 1.2D + 1.5Lm2 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 78 | 1.5 | 31 | 1 | 69 | 1 | | | | | | | |
| 42 | 1.2D + 1.5Lm2 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 78 | 1.5 | 32 | 1 | 70 | 1 | | | | | | | |
| 43 | 1.2D + 1.5Lm2 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 78 | 1.5 | 33 | 1 | 71 | 1 | | | | | | | |
| 44 | 1.2D + 1.5Lm2 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 78 | 1.5 | 34 | 1 | 72 | 1 | | | | | | | |
| 45 | 1.2D + 1.5Lm2 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 78 | 1.5 | 35 | 1 | 73 | 1 | | | | | | | |
| 46 | 1.2D + 1.5Lm2 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 78 | 1.5 | 36 | 1 | 74 | 1 | | | | | | | |
| 47 | 1.2D + 1.5Lm2 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 78 | 1.5 | 37 | 1 | 75 | 1 | | | | | | | |
| 48 | 1.2D + 1.5Lm2 + 1.0W... | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 78 | 1.5 | 38 | 1 | 76 | 1 | | | | | | | |
| 49 | 1.2D + 1.5Lv1 | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 79 | 1.5 | | | | | | | | | | | |
| 50 | 1.2D + 1.5Lv2 | Yes | Y | | 1 | 1.2 | 39 | 1.2 | 80 | 1.5 | | | | | | | | | | | |
| 51 | 1.4D | Yes | Y | | 1 | 1.4 | 39 | 1.4 | | | | | | | | | | | | | |
| 52 | Seismic Mass | | Y | | 1 | 1 | 39 | 1 | | | | | | | | | | | | | |
| 53 | 1.2D + 1.0Ev + 1.0Eh (...) | | Y | | 1 | 1.2 | 39 | 1.2 | SX | | SY | 1 | SZ | -1 | | | | | | | |
| 54 | 1.2D + 1.0Ev + 1.0Eh (...) | | Y | | 1 | 1.2 | 39 | 1.2 | SX | .5 | SY | 1 | SZ | -... | | | | | | | |
| 55 | 1.2D + 1.0Ev + 1.0Eh (...) | | Y | | 1 | 1.2 | 39 | 1.2 | SX | .866 | SY | 1 | SZ | -.5 | | | | | | | |
| 56 | 1.2D + 1.0Ev + 1.0Eh (...) | | Y | | 1 | 1.2 | 39 | 1.2 | SX | 1 | SY | 1 | SZ | | | | | | | | |
| 57 | 1.2D + 1.0Ev + 1.0Eh (...) | | Y | | 1 | 1.2 | 39 | 1.2 | SX | .866 | SY | 1 | SZ | .5 | | | | | | | |
| 58 | 1.2D + 1.0Ev + 1.0Eh (...) | | Y | | 1 | 1.2 | 39 | 1.2 | SX | .5 | SY | 1 | SZ | .8... | | | | | | | |
| 59 | 1.2D + 1.0Ev + 1.0Eh (...) | | Y | | 1 | 1.2 | 39 | 1.2 | SX | | SY | 1 | SZ | 1 | | | | | | | |
| 60 | 1.2D + 1.0Ev + 1.0Eh (...) | | Y | | 1 | 1.2 | 39 | 1.2 | SX | -.5 | SY | 1 | SZ | .8... | | | | | | | |
| 61 | 1.2D + 1.0Ev + 1.0Eh (...) | | Y | | 1 | 1.2 | 39 | 1.2 | SX | -.866 | SY | 1 | SZ | .5 | | | | | | | |
| 62 | 1.2D + 1.0Ev + 1.0Eh (...) | | Y | | 1 | 1.2 | 39 | 1.2 | SX | -1 | SY | 1 | SZ | | | | | | | | |
| 63 | 1.2D + 1.0Ev + 1.0Eh (...) | | Y | | 1 | 1.2 | 39 | 1.2 | SX | -.866 | SY | 1 | SZ | -.5 | | | | | | | |
| 64 | 1.2D + 1.0Ev + 1.0Eh (...) | | Y | | 1 | 1.2 | 39 | 1.2 | SX | -.5 | SY | 1 | SZ | -... | | | | | | | |
| 65 | | | Y | | 1 | 1.2 | 39 | 1.2 | SX | -.5 | SY | 1 | SZ | -... | | | | | | | |
| 66 | | | Y | | 1 | 1.2 | 39 | 1.2 | SX | -.5 | SY | 1 | SZ | -... | | | | | | | |

Joint Coordinates and Temperatures

| | Label | X [ft] | Y [ft] | Z [ft] | Temp [F] | Detach From Diap... |
|----|-------|-----------|----------|-----------|----------|---------------------|
| 1 | N1 | 6.25 | 0 | 3.935523 | 0 | |
| 2 | N2 | -6.25 | 0 | 3.935523 | 0 | |
| 3 | N3 | -0. | 0 | -1.5 | 0 | |
| 4 | N5 | -2.541667 | 0 | -3.041667 | 0 | |
| 5 | N6 | 2.315104 | 0.166667 | -3.041667 | 0 | |
| 6 | N7 | -2.315104 | 0.166667 | -3.041667 | 0 | |
| 7 | N8 | 5.833333 | 0 | 3.935523 | 0 | |
| 8 | N9 | 5.833333 | 0 | 4.185523 | 0 | |
| 9 | N10 | -5.833333 | 0 | 3.935523 | 0 | |
| 10 | N11 | -5.833333 | 0 | 4.185523 | 0 | |
| 11 | N12 | 1.916667 | 0 | 3.935523 | 0 | |
| 12 | N13 | 1.916667 | 0 | 4.185523 | 0 | |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Joint Coordinates and Temperatures (Continued)

| | Label | X [ft] | Y [ft] | Z [ft] | Temp [F] | Detach From Diap... |
|----|-------|-----------|----------|-----------|----------|---------------------|
| 13 | N14 | -3.833333 | 0 | 3.935523 | 0 | |
| 14 | N15 | -3.833333 | 0 | 4.185523 | 0 | |
| 15 | N16 | -3.833333 | -1.5 | 4.185523 | 0 | |
| 16 | N17 | -3.833333 | 5 | 4.185523 | 0 | |
| 17 | N18 | -5.833333 | -1.5 | 4.185523 | 0 | |
| 18 | N19 | -5.833333 | 5 | 4.185523 | 0 | |
| 19 | N20 | 1.916667 | -1.5 | 4.185523 | 0 | |
| 20 | N21 | 1.916667 | 5 | 4.185523 | 0 | |
| 21 | N22 | 5.833333 | -1.5 | 4.185523 | 0 | |
| 22 | N23 | 5.833333 | 5 | 4.185523 | 0 | |
| 23 | N24 | -0. | 0 | -3.041667 | 0 | |
| 24 | N27 | -0. | 0 | -6.729167 | 0 | |
| 25 | CP | 0 | 0 | 0 | 0 | |
| 26 | N29 | 2.315104 | 0 | -3.041667 | 0 | |
| 27 | N30 | -2.315104 | 0 | -3.041667 | 0 | |
| 28 | N101 | 2.541667 | 0 | -3.041667 | 0 | |
| 29 | N102 | -0.166667 | 0 | -3.041667 | 0 | |
| 30 | N103A | 0.166667 | 0 | -3.041667 | 0 | |
| 31 | N104A | -2.541667 | 0 | -3.260417 | 0 | |
| 32 | N105 | 2.541667 | 0 | -3.260417 | 0 | |
| 33 | N131 | 2.458333 | 0 | -3.404754 | 0 | |
| 34 | N135 | 0.571615 | 0 | -6.63219 | 0 | |
| 35 | N144 | -2.458333 | 0 | -3.404754 | 0 | |
| 36 | N148 | -0.571615 | 0 | -6.63219 | 0 | |
| 37 | N86A | 2.548545 | 0 | -3.456838 | 0 | |
| 38 | N86B | -2.548545 | 0 | -3.456838 | 0 | |
| 39 | N86C | -0.515625 | 0 | -6.729167 | 0 | |
| 40 | N87A | 0.515625 | 0 | -6.729167 | 0 | |
| 41 | N86D | 0.679344 | 0 | -6.694388 | 0 | |
| 42 | N86E | -0.679344 | 0 | -6.694388 | 0 | |
| 43 | N88A | -0. | 0 | -6.645833 | 0 | |
| 44 | N87C | 0.234238 | 0.166667 | -6.645833 | 0 | |
| 45 | N86G | 0.234238 | 0 | -6.645833 | 0 | |
| 46 | N87B | -0.234238 | 0.166667 | -6.645833 | 0 | |
| 47 | N88C | -0.234238 | 0 | -6.645833 | 0 | |
| 48 | N48 | 0.283263 | 0 | -7.38042 | 0 | |
| 49 | N49 | 6.533263 | 0 | 3.444897 | 0 | |
| 50 | N67 | -6.533263 | 0 | 3.444897 | 0 | |
| 51 | N68 | -0.283263 | 0 | -7.38042 | 0 | |
| 52 | N84A | -1.299038 | 0 | 0.75 | 0 | |
| 53 | N85 | -1.363327 | 0 | 3.721981 | 0 | |
| 54 | N86 | -3.791713 | 0.166667 | -0.484106 | 0 | |
| 55 | N87 | -1.476609 | 0.166667 | 3.525772 | 0 | |
| 56 | N88 | -2.634161 | 0 | 1.520833 | 0 | |
| 57 | N89 | -5.827629 | 0 | 3.364583 | 0 | |
| 58 | N91 | -3.791713 | 0 | -0.484106 | 0 | |
| 59 | N92 | -1.476609 | 0 | 3.525772 | 0 | |
| 60 | N93 | -3.904994 | 0 | -0.680315 | 0 | |
| 61 | N94 | -2.550827 | 0 | 1.665171 | 0 | |
| 62 | N95 | -2.717494 | 0 | 1.376496 | 0 | |
| 63 | N96 | -1.55277 | 0 | 3.831356 | 0 | |
| 64 | N97 | -4.094437 | 0 | -0.57094 | 0 | |
| 65 | N98 | -4.17777 | 0 | -0.426602 | 0 | |
| 66 | N99 | -6.029452 | 0 | 2.821062 | 0 | |
| 67 | N100 | -1.719437 | 0 | 3.831356 | 0 | |
| 68 | N101A | -5.457838 | 0 | 3.811128 | 0 | |
| 69 | N102A | -4.267982 | 0 | -0.478685 | 0 | |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Joint Coordinates and Temperatures (Continued)

| | Label | X [ft] | Y [ft] | Z [ft] | Temp [F] | Detach From Diap... |
|-----|-------|-----------|----------|-----------|----------|---------------------|
| 70 | N103 | -1.719437 | 0 | 3.935523 | 0 | |
| 71 | N104 | -5.569817 | 0 | 3.811128 | 0 | |
| 72 | N105A | -6.085442 | 0 | 2.918039 | 0 | |
| 73 | N106 | -6.137182 | 0 | 2.758864 | 0 | |
| 74 | N107 | -5.457838 | 0 | 3.935523 | 0 | |
| 75 | N108 | -5.75546 | 0 | 3.322917 | 0 | |
| 76 | N109 | -5.872579 | 0.166667 | 3.120061 | 0 | |
| 77 | N110 | -5.872579 | 0 | 3.120061 | 0 | |
| 78 | N111 | -5.638342 | 0.166667 | 3.525772 | 0 | |
| 79 | N112 | -5.638342 | 0 | 3.525772 | 0 | |
| 80 | N113 | 1.299038 | 0 | 0.75 | 0 | |
| 81 | N114 | 3.904994 | 0 | -0.680315 | 0 | |
| 82 | N115 | 1.476609 | 0.166667 | 3.525772 | 0 | |
| 83 | N116 | 3.791713 | 0.166667 | -0.484106 | 0 | |
| 84 | N117 | 2.634161 | 0 | 1.520833 | 0 | |
| 85 | N118 | 5.827629 | 0 | 3.364583 | 0 | |
| 86 | N120 | 1.476609 | 0 | 3.525772 | 0 | |
| 87 | N121 | 3.791713 | 0 | -0.484106 | 0 | |
| 88 | N122 | 1.363327 | 0 | 3.721981 | 0 | |
| 89 | N123 | 2.717494 | 0 | 1.376496 | 0 | |
| 90 | N124 | 2.550827 | 0 | 1.665171 | 0 | |
| 91 | N125 | 4.094437 | 0 | -0.57094 | 0 | |
| 92 | N126 | 1.55277 | 0 | 3.831356 | 0 | |
| 93 | N127 | 1.719437 | 0 | 3.831356 | 0 | |
| 94 | N128 | 5.457838 | 0 | 3.811128 | 0 | |
| 95 | N129 | 4.17777 | 0 | -0.426602 | 0 | |
| 96 | N130 | 6.029452 | 0 | 2.821062 | 0 | |
| 97 | N131A | 1.719437 | 0 | 3.935523 | 0 | |
| 98 | N132 | 4.267982 | 0 | -0.478686 | 0 | |
| 99 | N133 | 6.085442 | 0 | 2.918039 | 0 | |
| 100 | N134 | 5.569817 | 0 | 3.811128 | 0 | |
| 101 | N135A | 5.457838 | 0 | 3.935523 | 0 | |
| 102 | N136 | 6.137182 | 0 | 2.758864 | 0 | |
| 103 | N137 | 5.75546 | 0 | 3.322917 | 0 | |
| 104 | N138 | 5.638342 | 0.166667 | 3.525772 | 0 | |
| 105 | N139 | 5.638342 | 0 | 3.525772 | 0 | |
| 106 | N140 | 5.872579 | 0.166667 | 3.120061 | 0 | |
| 107 | N141 | 5.872579 | 0 | 3.120061 | 0 | |
| 108 | N108A | 6.25 | 3.75 | 3.935523 | 0 | |
| 109 | N109A | -6.25 | 3.75 | 3.935523 | 0 | |
| 110 | N110A | 5.833333 | 3.75 | 3.935523 | 0 | |
| 111 | N111A | 5.833333 | 3.75 | 4.185523 | 0 | |
| 112 | N112A | -5.833333 | 3.75 | 3.935523 | 0 | |
| 113 | N113A | -5.833333 | 3.75 | 4.185523 | 0 | |
| 114 | N114A | 1.916667 | 3.75 | 3.935523 | 0 | |
| 115 | N115A | 1.916667 | 3.75 | 4.185523 | 0 | |
| 116 | N116A | -3.833333 | 3.75 | 3.935523 | 0 | |
| 117 | N117A | -3.833333 | 3.75 | 4.185523 | 0 | |
| 118 | N119 | 0.283263 | 3.75 | -7.38042 | 0 | |
| 119 | N120A | 6.533263 | 3.75 | 3.444897 | 0 | |
| 120 | N121A | 0.491596 | 3.75 | -7.019576 | 0 | |
| 121 | N122A | 0.708103 | 3.75 | -7.144576 | 0 | |
| 122 | N123A | 6.32493 | 3.75 | 3.084053 | 0 | |
| 123 | N124A | 6.541436 | 3.75 | 2.959053 | 0 | |
| 124 | N125A | 2.44993 | 3.75 | -3.627644 | 0 | |
| 125 | N126A | 2.666436 | 3.75 | -3.752644 | 0 | |
| 126 | N127A | 5.32493 | 3.75 | 1.352002 | 0 | |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Joint Coordinates and Temperatures (Continued)

| | Label | X [ft] | Y [ft] | Z [ft] | Temp [F] | Detach From Diap... |
|-----|-------|-----------|--------|-----------|----------|---------------------|
| 127 | N128A | 5.541436 | 3.75 | 1.227002 | 0 | |
| 128 | N130A | -6.533263 | 3.75 | 3.444897 | 0 | |
| 129 | N131B | -0.283263 | 3.75 | -7.38042 | 0 | |
| 130 | N132A | -6.32493 | 3.75 | 3.084053 | 0 | |
| 131 | N133A | -6.541436 | 3.75 | 2.959053 | 0 | |
| 132 | N134A | -0.491596 | 3.75 | -7.019576 | 0 | |
| 133 | N135B | -0.708103 | 3.75 | -7.144576 | 0 | |
| 134 | N136A | -4.366596 | 3.75 | -0.30788 | 0 | |
| 135 | N137A | -4.583103 | 3.75 | -0.43288 | 0 | |
| 136 | N138A | -1.491596 | 3.75 | -5.287526 | 0 | |
| 137 | N139A | -1.708103 | 3.75 | -5.412526 | 0 | |
| 138 | N138B | 5.541436 | -1.5 | 1.227002 | 0 | |
| 139 | N139B | 5.541436 | 5 | 1.227002 | 0 | |
| 140 | N140A | 6.541436 | -1.5 | 2.959053 | 0 | |
| 141 | N141A | 6.541436 | 5 | 2.959053 | 0 | |
| 142 | N142 | 2.666436 | -1.5 | -3.752644 | 0 | |
| 143 | N143 | 2.666436 | 5 | -3.752644 | 0 | |
| 144 | N144A | 0.708103 | -1.5 | -7.144576 | 0 | |
| 145 | N145 | 0.708103 | 5 | -7.144576 | 0 | |
| 146 | N147 | -1.708103 | -1.5 | -5.412526 | 0 | |
| 147 | N148A | -1.708103 | 5 | -5.412526 | 0 | |
| 148 | N149 | -0.708103 | -1.5 | -7.144576 | 0 | |
| 149 | N150 | -0.708103 | 5 | -7.144576 | 0 | |
| 150 | N151 | -4.583103 | -1.5 | -0.43288 | 0 | |
| 151 | N152 | -4.583103 | 5 | -0.43288 | 0 | |
| 152 | N153 | -6.541436 | -1.5 | 2.959053 | 0 | |
| 153 | N154 | -6.541436 | 5 | 2.959053 | 0 | |
| 154 | N154A | 0.529948 | 3.75 | -6.704359 | 0 | |
| 155 | N155 | -0.529948 | 3.75 | -6.704359 | 0 | |
| 156 | N156 | 0.637678 | 3.75 | -6.766556 | 0 | |
| 157 | N157 | -0.637678 | 3.75 | -6.766556 | 0 | |
| 158 | N159 | -6.071119 | 3.75 | 2.893231 | 0 | |
| 159 | N160 | -5.541171 | 3.75 | 3.811128 | 0 | |
| 160 | N161 | -6.178849 | 3.75 | 2.831033 | 0 | |
| 161 | N162 | -5.541171 | 3.75 | 3.935523 | 0 | |
| 162 | N164 | 5.541171 | 3.75 | 3.811128 | 0 | |
| 163 | N165 | 6.071119 | 3.75 | 2.893231 | 0 | |
| 164 | N166 | 5.541171 | 3.75 | 3.935523 | 0 | |
| 165 | N167 | 6.178849 | 3.75 | 2.831033 | 0 | |
| 166 | N166A | 0.491596 | 0 | -7.019576 | 0 | |
| 167 | N167A | 0.708103 | 0 | -7.144576 | 0 | |
| 168 | N168 | 6.32493 | 0 | 3.084053 | 0 | |
| 169 | N169 | 6.541436 | 0 | 2.959053 | 0 | |
| 170 | N170 | 2.44993 | 0 | -3.627644 | 0 | |
| 171 | N171 | 2.666436 | 0 | -3.752644 | 0 | |
| 172 | N172 | 5.32493 | 0 | 1.352002 | 0 | |
| 173 | N173 | 5.541436 | 0 | 1.227002 | 0 | |
| 174 | N183 | -6.32493 | 0 | 3.084053 | 0 | |
| 175 | N184 | -6.541436 | 0 | 2.959053 | 0 | |
| 176 | N185 | -0.491596 | 0 | -7.019576 | 0 | |
| 177 | N186 | -0.708103 | 0 | -7.144576 | 0 | |
| 178 | N187 | -4.366596 | 0 | -0.30788 | 0 | |
| 179 | N188 | -4.583103 | 0 | -0.43288 | 0 | |
| 180 | N189 | -1.491596 | 0 | -5.287526 | 0 | |
| 181 | N190 | -1.708103 | 0 | -5.412526 | 0 | |

Hot Rolled Steel Section Sets

| | Label | Shape | Type | Design List | Material | Design ... | A [in2] | Iyy [in4] | Izz [in4] | J [in4] |
|----|----------------------|------------|--------|--------------|----------------|------------|---------|-----------|-----------|---------|
| 1 | Face Horizontal | PIPE 3.0 | Beam | Pipe | A53 Gr.B | Typical | 2.07 | 2.85 | 2.85 | 5.69 |
| 2 | Standoff Horizontal | HSS4X4X3 | Beam | SquareTube | A500 Gr.B Rect | Typical | 2.58 | 6.21 | 6.21 | 10 |
| 3 | Corner Plate | PL1/2x6 | Beam | BAR | A36 Gr.36 | Typical | 3 | .063 | 9 | .237 |
| 4 | Platform Crossmem... | HSS4X4X3 | Beam | SquareTube | A500 Gr.B Rect | Typical | 2.58 | 6.21 | 6.21 | 10 |
| 5 | Grating Support | L2x2x3 | Beam | Single Angle | A36 Gr.36 | Typical | .722 | .271 | .271 | .009 |
| 6 | Mount Pipe | PIPE 2.0 | Column | Pipe | A53 Gr.B | Typical | 1.02 | .627 | .627 | 1.25 |
| 7 | Cross Arm Plate | PL3/8x6 | Column | RECT | A36 Gr.36 | Typical | 2.25 | .026 | 6.75 | .101 |
| 8 | P2.5 Mount Pipe | PIPE 2.5 | Column | Pipe | A53 Gr.B | Typical | 1.61 | 1.45 | 1.45 | 2.89 |
| 9 | Support Rail | PIPE 2.0 | Beam | Pipe | A53 Gr.B | Typical | 1.02 | .627 | .627 | 1.25 |
| 10 | Conner Angle | L2.5x2.5x6 | Beam | Single Angle | A36 Gr.36 | Typical | 1.73 | .972 | .972 | .083 |

Hot Rolled Steel Properties

| | Label | E [ksi] | G [ksi] | Nu | Therm (/1E5 F) | Density[k/f... | Yield[ksi] | Ry | Fu[ksi] | Rt |
|---|----------------|---------|---------|----|----------------|----------------|------------|-----|---------|-----|
| 1 | A992 | 29000 | 11154 | .3 | .65 | .49 | 50 | 1.1 | 65 | 1.1 |
| 2 | A36 Gr.36 | 29000 | 11154 | .3 | .65 | .49 | 36 | 1.5 | 58 | 1.2 |
| 3 | A572 Gr.50 | 29000 | 11154 | .3 | .65 | .49 | 50 | 1.1 | 65 | 1.1 |
| 4 | A500 Gr.B RND | 29000 | 11154 | .3 | .65 | .527 | 42 | 1.4 | 58 | 1.3 |
| 5 | A500 Gr.B Rect | 29000 | 11154 | .3 | .65 | .527 | 46 | 1.4 | 58 | 1.3 |
| 6 | A53 Gr.B | 29000 | 11154 | .3 | .65 | .49 | 35 | 1.6 | 60 | 1.2 |
| 7 | A1085 | 29000 | 11154 | .3 | .65 | .49 | 50 | 1.4 | 65 | 1.3 |
| 8 | Q235 | 29000 | 11154 | .3 | .65 | .49 | 35 | 1.5 | 58 | 1.2 |

Member Primary Data

| | Label | I Joint | J Joint | K Joint | Rotate(deg) | Section/Shape | Type | Design List | Material | Design Rules |
|----|-------|---------|---------|---------|-------------|------------------------|--------|--------------|--------------|--------------|
| 1 | M1 | N1 | N2 | | | Face Horizontal | Beam | Pipe | A53 Gr.B | Typical |
| 2 | M4 | N3 | N27 | | | Standoff Horizontal... | Beam | SquareTube | A500 Gr.B... | Typical |
| 3 | M10 | N101 | N103A | | | Platform Crossm... | Beam | SquareTube | A500 Gr.B... | Typical |
| 4 | M19 | N8 | N9 | | | RIGID | None | None | RIGID | Typical |
| 5 | M20 | N10 | N11 | | | RIGID | None | None | RIGID | Typical |
| 6 | M21 | N12 | N13 | | | RIGID | None | None | RIGID | Typical |
| 7 | M22 | N14 | N15 | | | RIGID | None | None | RIGID | Typical |
| 8 | MP3A | N17 | N16 | | | Mount Pipe | Column | Pipe | A53 Gr.B | Typical |
| 9 | MP4A | N19 | N18 | | | Mount Pipe | Column | Pipe | A53 Gr.B | Typical |
| 10 | MP2A | N21 | N20 | | | Mount Pipe | Column | Pipe | A53 Gr.B | Typical |
| 11 | MP1A | N23 | N22 | | | Mount Pipe | Column | Pipe | A53 Gr.B | Typical |
| 12 | M43 | N102 | N5 | | | Platform Crossm... | Beam | SquareTube | A500 Gr.B... | Typical |
| 13 | M46 | N86C | N87A | | | Corner Plate | Beam | BAR | A36 Gr.36 | Typical |
| 14 | M35A | N7 | N30 | | | RIGID | None | None | RIGID | Typical |
| 15 | M36A | N6 | N29 | | | RIGID | None | None | RIGID | Typical |
| 16 | M51B | N87C | N6 | | | Grating Support | Beam | Single Angle | A36 Gr.36 | Typical |
| 17 | M52B | N7 | N87B | | | Grating Support | Beam | Single Angle | A36 Gr.36 | Typical |
| 18 | M52 | N87B | N88C | | | RIGID | None | None | RIGID | Typical |
| 19 | M58 | N102 | N24 | | | RIGID | None | None | RIGID | Typical |
| 20 | M59 | N24 | N103A | | | RIGID | None | None | RIGID | Typical |
| 21 | M76 | N101 | N105 | | | Cross Arm Plate | Column | RECT | A36 Gr.36 | Typical |
| 22 | M77 | N105 | N131 | | | Cross Arm Plate | Column | RECT | A36 Gr.36 | Typical |
| 23 | M79 | N131 | N86A | | | RIGID | None | None | RIGID | Typical |
| 24 | M80 | N87A | N135 | | | Corner Plate | Beam | BAR | A36 Gr.36 | Typical |
| 25 | M83 | N135 | N86D | | | RIGID | None | None | RIGID | Typical |
| 26 | M84 | N5 | N104A | | | Cross Arm Plate | Column | RECT | A36 Gr.36 | Typical |
| 27 | M85 | N104A | N144 | | | Cross Arm Plate | Column | RECT | A36 Gr.36 | Typical |
| 28 | M88 | N144 | N86B | | | RIGID | None | None | RIGID | Typical |
| 29 | M91 | N86C | N148 | | | Corner Plate | Beam | BAR | A36 Gr.36 | Typical |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Primary Data (Continued)

| | Label | I Joint | J Joint | K Joint | Rotate(deg) | Section/Shape | Type | Design List | Material | Design Rules |
|----|-------|---------|---------|---------|-------------|----------------------|--------|--------------|--------------|--------------|
| 30 | M92 | N148 | N86E | | | RIGID | None | None | RIGID | Typical |
| 31 | M50 | N88C | N88A | | | RIGID | None | None | RIGID | Typical |
| 32 | M51 | N88A | N86G | | | RIGID | None | None | RIGID | Typical |
| 33 | M51A | N87C | N86G | | | RIGID | None | None | RIGID | Typical |
| 34 | M34 | N48 | N49 | | | Face Horizontal | Beam | Pipe | A53 Gr.B | Typical |
| 35 | M43A | N67 | N68 | | | Face Horizontal | Beam | Pipe | A53 Gr.B | Typical |
| 36 | M52A | N84A | N89 | | | Standoff Horizont... | Beam | SquareTube | A500 Gr.B... | Typical |
| 37 | M53 | N93 | N95 | | | Platform Crossm... | Beam | SquareTube | A500 Gr.B... | Typical |
| 38 | M54 | N94 | N85 | | | Platform Crossm... | Beam | SquareTube | A500 Gr.B... | Typical |
| 39 | M55 | N104 | N105A | | | Corner Plate | Beam | BAR | A36 Gr.36 | Typical |
| 40 | M56 | N87 | N92 | | | RIGID | None | None | RIGID | Typical |
| 41 | M57 | N86 | N91 | | | RIGID | None | None | RIGID | Typical |
| 42 | M58A | N109 | N86 | | | Grating Support | Beam | Single Angle | A36 Gr.36 | Typical |
| 43 | M59A | N87 | N111 | | | Grating Support | Beam | Single Angle | A36 Gr.36 | Typical |
| 44 | M60 | N111 | N112 | | | RIGID | None | None | RIGID | Typical |
| 45 | M61 | N94 | N88 | | | RIGID | None | None | RIGID | Typical |
| 46 | M62 | N88 | N95 | | | RIGID | None | None | RIGID | Typical |
| 47 | M63 | N93 | N97 | | | Cross Arm Plate | Column | RECT | A36 Gr.36 | Typical |
| 48 | M64 | N97 | N98 | | | Cross Arm Plate | Column | RECT | A36 Gr.36 | Typical |
| 49 | M65 | N98 | N102A | | | RIGID | None | None | RIGID | Typical |
| 50 | M66 | N105A | N99 | | | Corner Plate | Beam | BAR | A36 Gr.36 | Typical |
| 51 | M67 | N99 | N106 | | | RIGID | None | None | RIGID | Typical |
| 52 | M68 | N85 | N96 | | | Cross Arm Plate | Column | RECT | A36 Gr.36 | Typical |
| 53 | M69 | N96 | N100 | | | Cross Arm Plate | Column | RECT | A36 Gr.36 | Typical |
| 54 | M70 | N100 | N103 | | | RIGID | None | None | RIGID | Typical |
| 55 | M71 | N104 | N101A | | | Corner Plate | Beam | BAR | A36 Gr.36 | Typical |
| 56 | M72 | N101A | N107 | | | RIGID | None | None | RIGID | Typical |
| 57 | M73 | N112 | N108 | | | RIGID | None | None | RIGID | Typical |
| 58 | M74 | N108 | N110 | | | RIGID | None | None | RIGID | Typical |
| 59 | M75 | N109 | N110 | | | RIGID | None | None | RIGID | Typical |
| 60 | M76A | N113 | N118 | | | Standoff Horizont... | Beam | SquareTube | A500 Gr.B... | Typical |
| 61 | M77A | N122 | N124 | | | Platform Crossm... | Beam | SquareTube | A500 Gr.B... | Typical |
| 62 | M78 | N123 | N114 | | | Platform Crossm... | Beam | SquareTube | A500 Gr.B... | Typical |
| 63 | M79A | N133 | N134 | | | Corner Plate | Beam | BAR | A36 Gr.36 | Typical |
| 64 | M80A | N116 | N121 | | | RIGID | None | None | RIGID | Typical |
| 65 | M81 | N115 | N120 | | | RIGID | None | None | RIGID | Typical |
| 66 | M82 | N138 | N115 | | | Grating Support | Beam | Single Angle | A36 Gr.36 | Typical |
| 67 | M83A | N116 | N140 | | | Grating Support | Beam | Single Angle | A36 Gr.36 | Typical |
| 68 | M84A | N140 | N141 | | | RIGID | None | None | RIGID | Typical |
| 69 | M85A | N123 | N117 | | | RIGID | None | None | RIGID | Typical |
| 70 | M86 | N117 | N124 | | | RIGID | None | None | RIGID | Typical |
| 71 | M87 | N122 | N126 | | | Cross Arm Plate | Column | RECT | A36 Gr.36 | Typical |
| 72 | M88A | N126 | N127 | | | Cross Arm Plate | Column | RECT | A36 Gr.36 | Typical |
| 73 | M89 | N127 | N131A | | | RIGID | None | None | RIGID | Typical |
| 74 | M90 | N134 | N128 | | | Corner Plate | Beam | BAR | A36 Gr.36 | Typical |
| 75 | M91A | N128 | N135A | | | RIGID | None | None | RIGID | Typical |
| 76 | M92A | N114 | N125 | | | Cross Arm Plate | Column | RECT | A36 Gr.36 | Typical |
| 77 | M93 | N125 | N129 | | | Cross Arm Plate | Column | RECT | A36 Gr.36 | Typical |
| 78 | M94 | N129 | N132 | | | RIGID | None | None | RIGID | Typical |
| 79 | M95 | N133 | N130 | | | Corner Plate | Beam | BAR | A36 Gr.36 | Typical |
| 80 | M96 | N130 | N136 | | | RIGID | None | None | RIGID | Typical |
| 81 | M97 | N141 | N137 | | | RIGID | None | None | RIGID | Typical |
| 82 | M98 | N137 | N139 | | | RIGID | None | None | RIGID | Typical |
| 83 | M99 | N138 | N139 | | | RIGID | None | None | RIGID | Typical |
| 84 | M84B | N108A | N109A | | | Support Rail | Beam | Pipe | A53 Gr.B | Typical |
| 85 | M85B | N110A | N111A | | | RIGID | None | None | RIGID | Typical |
| 86 | M86A | N112A | N113A | | | RIGID | None | None | RIGID | Typical |

Member Primary Data (Continued)

| | Label | I Joint | J Joint | K Joint | Rotate(deg) | Section/Shape | Type | Design List | Material | Design Rules |
|-----|-------|---------|---------|---------|-------------|---------------|--------|--------------|-----------|--------------|
| 87 | M87A | N114A | N115A | | | RIGID | None | None | RIGID | Typical |
| 88 | M88B | N116A | N117A | | | RIGID | None | None | RIGID | Typical |
| 89 | M89A | N119 | N120A | | | Support Rail | Beam | Pipe | A53 Gr.B | Typical |
| 90 | M90A | N121A | N122A | | | RIGID | None | None | RIGID | Typical |
| 91 | M91B | N123A | N124A | | | RIGID | None | None | RIGID | Typical |
| 92 | M92B | N125A | N126A | | | RIGID | None | None | RIGID | Typical |
| 93 | M93A | N127A | N128A | | | RIGID | None | None | RIGID | Typical |
| 94 | M94A | N130A | N131B | | | Support Rail | Beam | Pipe | A53 Gr.B | Typical |
| 95 | M95A | N132A | N133A | | | RIGID | None | None | RIGID | Typical |
| 96 | M96A | N134A | N135B | | | RIGID | None | None | RIGID | Typical |
| 97 | M97A | N136A | N137A | | | RIGID | None | None | RIGID | Typical |
| 98 | M98A | N138A | N139A | | | RIGID | None | None | RIGID | Typical |
| 99 | MP3C | N139B | N138B | | | Mount Pipe | Column | Pipe | A53 Gr.B | Typical |
| 100 | MP4C | N141A | N140A | | | Mount Pipe | Column | Pipe | A53 Gr.B | Typical |
| 101 | MP2C | N143 | N142 | | | Mount Pipe | Column | Pipe | A53 Gr.B | Typical |
| 102 | MP1C | N145 | N144A | | | Mount Pipe | Column | Pipe | A53 Gr.B | Typical |
| 103 | MP3B | N148A | N147 | | | Mount Pipe | Column | Pipe | A53 Gr.B | Typical |
| 104 | MP4B | N150 | N149 | | | Mount Pipe | Column | Pipe | A53 Gr.B | Typical |
| 105 | MP2B | N152 | N151 | | | Mount Pipe | Column | Pipe | A53 Gr.B | Typical |
| 106 | MP1B | N154 | N153 | | | Mount Pipe | Column | Pipe | A53 Gr.B | Typical |
| 107 | M107 | N154A | N156 | | | RIGID | None | None | RIGID | Typical |
| 108 | M108 | N155 | N157 | | | RIGID | None | None | RIGID | Typical |
| 109 | M109 | N155 | N154A | | 180 | Conner Angle | Beam | Single Angle | A36 Gr.36 | Typical |
| 110 | M110 | N159 | N161 | | | RIGID | None | None | RIGID | Typical |
| 111 | M111 | N160 | N162 | | | RIGID | None | None | RIGID | Typical |
| 112 | M112 | N160 | N159 | | 180 | Conner Angle | Beam | Single Angle | A36 Gr.36 | Typical |
| 113 | M113 | N164 | N166 | | | RIGID | None | None | RIGID | Typical |
| 114 | M114 | N165 | N167 | | | RIGID | None | None | RIGID | Typical |
| 115 | M115 | N165 | N164 | | 180 | Conner Angle | Beam | Single Angle | A36 Gr.36 | Typical |
| 116 | M116 | N166A | N167A | | | RIGID | None | None | RIGID | Typical |
| 117 | M117 | N168 | N169 | | | RIGID | None | None | RIGID | Typical |
| 118 | M118 | N170 | N171 | | | RIGID | None | None | RIGID | Typical |
| 119 | M119 | N172 | N173 | | | RIGID | None | None | RIGID | Typical |
| 120 | M124 | N183 | N184 | | | RIGID | None | None | RIGID | Typical |
| 121 | M125 | N185 | N186 | | | RIGID | None | None | RIGID | Typical |
| 122 | M126 | N187 | N188 | | | RIGID | None | None | RIGID | Typical |
| 123 | M127 | N189 | N190 | | | RIGID | None | None | RIGID | Typical |

Member Advanced Data

| | Label | I Release | J Release | I Offset[in] | J Offset[in] | T/C Only | Physical | Defl Rat.. | Analysis ... | Inactive | Seismic... |
|----|-------|-----------|-----------|--------------|--------------|----------|----------|------------|--------------|----------|------------|
| 1 | M1 | | | | | | Yes | Default | | | None |
| 2 | M4 | | | | | | Yes | | | | None |
| 3 | M10 | | | | | | Yes | Default | | | None |
| 4 | M19 | | | | | | Yes | ** NA ** | | | None |
| 5 | M20 | | | | | | Yes | ** NA ** | | | None |
| 6 | M21 | | | | | | Yes | ** NA ** | | | None |
| 7 | M22 | | | | | | Yes | ** NA ** | | | None |
| 8 | MP3A | | | | | | Yes | ** NA ** | | | None |
| 9 | MP4A | | | | | | Yes | ** NA ** | | | None |
| 10 | MP2A | | | | | | Yes | ** NA ** | | | None |
| 11 | MP1A | | | | | | Yes | ** NA ** | | | None |
| 12 | M43 | | | | | | Yes | Default | | | None |
| 13 | M46 | | | | | | Yes | Default | | | None |
| 14 | M35A | | | | | | Yes | ** NA ** | | | None |
| 15 | M36A | | | | | | Yes | ** NA ** | | | None |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Advanced Data (Continued)

| | Label | I Release | J Release | I Offset[in] | J Offset[in] | T/C Only | Physical | Defl Rat... | Analysis ... | Inactive | Seismic... |
|----|-------|-----------|-----------|--------------|--------------|----------|----------|-------------|--------------|----------|------------|
| 16 | M51B | OOOOOX | OOOOOX | | | | Yes | Default | | | None |
| 17 | M52B | OOOOOX | OOOOOX | | | | Yes | Default | | | None |
| 18 | M52 | | | | | | Yes | ** NA ** | | | None |
| 19 | M58 | | | | | | Yes | ** NA ** | | | None |
| 20 | M59 | | | | | | Yes | ** NA ** | | | None |
| 21 | M76 | | | | | | Yes | ** NA ** | | | None |
| 22 | M77 | | | | | | Yes | ** NA ** | | | None |
| 23 | M79 | | BenPIN | | | | Yes | ** NA ** | | | None |
| 24 | M80 | | | | | | Yes | | | | None |
| 25 | M83 | | BenPIN | | | | Yes | ** NA ** | | | None |
| 26 | M84 | | | | | | Yes | ** NA ** | | | None |
| 27 | M85 | | | | | | Yes | ** NA ** | | | None |
| 28 | M88 | | BenPIN | | | | Yes | ** NA ** | | | None |
| 29 | M91 | | | | | | Yes | | | | None |
| 30 | M92 | | BenPIN | | | | Yes | ** NA ** | | | None |
| 31 | M50 | | | | | | Yes | ** NA ** | | | None |
| 32 | M51 | | | | | | Yes | ** NA ** | | | None |
| 33 | M51A | | | | | | Yes | ** NA ** | | | None |
| 34 | M34 | | | | | | Yes | Default | | | None |
| 35 | M43A | | | | | | Yes | Default | | | None |
| 36 | M52A | | | | | | Yes | | | | None |
| 37 | M53 | | | | | | Yes | Default | | | None |
| 38 | M54 | | | | | | Yes | Default | | | None |
| 39 | M55 | | | | | | Yes | Default | | | None |
| 40 | M56 | | | | | | Yes | ** NA ** | | | None |
| 41 | M57 | | | | | | Yes | ** NA ** | | | None |
| 42 | M58A | OOOOOX | OOOOOX | | | | Yes | Default | | | None |
| 43 | M59A | OOOOOX | OOOOOX | | | | Yes | Default | | | None |
| 44 | M60 | | | | | | Yes | ** NA ** | | | None |
| 45 | M61 | | | | | | Yes | ** NA ** | | | None |
| 46 | M62 | | | | | | Yes | ** NA ** | | | None |
| 47 | M63 | | | | | | Yes | ** NA ** | | | None |
| 48 | M64 | | | | | | Yes | ** NA ** | | | None |
| 49 | M65 | | BenPIN | | | | Yes | ** NA ** | | | None |
| 50 | M66 | | | | | | Yes | | | | None |
| 51 | M67 | | BenPIN | | | | Yes | ** NA ** | | | None |
| 52 | M68 | | | | | | Yes | ** NA ** | | | None |
| 53 | M69 | | | | | | Yes | ** NA ** | | | None |
| 54 | M70 | | BenPIN | | | | Yes | ** NA ** | | | None |
| 55 | M71 | | | | | | Yes | | | | None |
| 56 | M72 | | BenPIN | | | | Yes | ** NA ** | | | None |
| 57 | M73 | | | | | | Yes | ** NA ** | | | None |
| 58 | M74 | | | | | | Yes | ** NA ** | | | None |
| 59 | M75 | | | | | | Yes | ** NA ** | | | None |
| 60 | M76A | | | | | | Yes | | | | None |
| 61 | M77A | | | | | | Yes | Default | | | None |
| 62 | M78 | | | | | | Yes | Default | | | None |
| 63 | M79A | | | | | | Yes | Default | | | None |
| 64 | M80A | | | | | | Yes | ** NA ** | | | None |
| 65 | M81 | | | | | | Yes | ** NA ** | | | None |
| 66 | M82 | OOOOOX | OOOOOX | | | | Yes | Default | | | None |
| 67 | M83A | OOOOOX | OOOOOX | | | | Yes | Default | | | None |
| 68 | M84A | | | | | | Yes | ** NA ** | | | None |
| 69 | M85A | | | | | | Yes | ** NA ** | | | None |
| 70 | M86 | | | | | | Yes | ** NA ** | | | None |
| 71 | M87 | | | | | | Yes | ** NA ** | | | None |
| 72 | M88A | | | | | | Yes | ** NA ** | | | None |

Member Advanced Data (Continued)

| | Label | I Release | J Release | I Offset[in] | J Offset[in] | T/C Only | Physical | Defl Rat... | Analysis ... | Inactive | Seismic... |
|-----|-------|-----------|-----------|--------------|--------------|----------|----------|-------------|--------------|----------|------------|
| 73 | M89 | | BenPIN | | | | Yes | ** NA ** | | | None |
| 74 | M90 | | | | | | Yes | | | | None |
| 75 | M91A | | BenPIN | | | | Yes | ** NA ** | | | None |
| 76 | M92A | | | | | | Yes | ** NA ** | | | None |
| 77 | M93 | | | | | | Yes | ** NA ** | | | None |
| 78 | M94 | | BenPIN | | | | Yes | ** NA ** | | | None |
| 79 | M95 | | | | | | Yes | | | | None |
| 80 | M96 | | BenPIN | | | | Yes | ** NA ** | | | None |
| 81 | M97 | | | | | | Yes | ** NA ** | | | None |
| 82 | M98 | | | | | | Yes | ** NA ** | | | None |
| 83 | M99 | | | | | | Yes | ** NA ** | | | None |
| 84 | M84B | | | | | | Yes | Default | | | None |
| 85 | M85B | | | | | | Yes | ** NA ** | | | None |
| 86 | M86A | | | | | | Yes | ** NA ** | | | None |
| 87 | M87A | | | | | | Yes | ** NA ** | | | None |
| 88 | M88B | | | | | | Yes | ** NA ** | | | None |
| 89 | M89A | | | | | | Yes | Default | | | None |
| 90 | M90A | | | | | | Yes | ** NA ** | | | None |
| 91 | M91B | | | | | | Yes | ** NA ** | | | None |
| 92 | M92B | | | | | | Yes | ** NA ** | | | None |
| 93 | M93A | | | | | | Yes | ** NA ** | | | None |
| 94 | M94A | | | | | | Yes | Default | | | None |
| 95 | M95A | | | | | | Yes | ** NA ** | | | None |
| 96 | M96A | | | | | | Yes | ** NA ** | | | None |
| 97 | M97A | | | | | | Yes | ** NA ** | | | None |
| 98 | M98A | | | | | | Yes | ** NA ** | | | None |
| 99 | MP3C | | | | | | Yes | ** NA ** | | | None |
| 100 | MP4C | | | | | | Yes | ** NA ** | | | None |
| 101 | MP2C | | | | | | Yes | ** NA ** | | | None |
| 102 | MP1C | | | | | | Yes | ** NA ** | | | None |
| 103 | MP3B | | | | | | Yes | ** NA ** | | | None |
| 104 | MP4B | | | | | | Yes | ** NA ** | | | None |
| 105 | MP2B | | | | | | Yes | ** NA ** | | | None |
| 106 | MP1B | | | | | | Yes | ** NA ** | | | None |
| 107 | M107 | | 000000 | | | | Yes | ** NA ** | | | None |
| 108 | M108 | | 000000 | | | | Yes | ** NA ** | | | None |
| 109 | M109 | | | | | | Yes | | | | None |
| 110 | M110 | | 000000 | | | | Yes | ** NA ** | | | None |
| 111 | M111 | | 000000 | | | | Yes | ** NA ** | | | None |
| 112 | M112 | | | | | | Yes | | | | None |
| 113 | M113 | | 000000 | | | | Yes | ** NA ** | | | None |
| 114 | M114 | | 000000 | | | | Yes | ** NA ** | | | None |
| 115 | M115 | | | | | | Yes | | | | None |
| 116 | M116 | | | | | | Yes | ** NA ** | | | None |
| 117 | M117 | | | | | | Yes | ** NA ** | | | None |
| 118 | M118 | | | | | | Yes | ** NA ** | | | None |
| 119 | M119 | | | | | | Yes | ** NA ** | | | None |
| 120 | M124 | | | | | | Yes | ** NA ** | | | None |
| 121 | M125 | | | | | | Yes | ** NA ** | | | None |
| 122 | M126 | | | | | | Yes | ** NA ** | | | None |
| 123 | M127 | | | | | | Yes | ** NA ** | | | None |

Member Point Loads (BLC 1 : Antenna D)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|---|--------------|-----------|--------------------|----------------|
| 1 | MP3A | Y | -43.55 | 2.5 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Point Loads (BLC 1 : Antenna D) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 2 | MP3A | My | -.022 | 2.5 |
| 3 | MP3A | Mz | 0 | 2.5 |
| 4 | MP3A | Y | -43.55 | 4.5 |
| 5 | MP3A | My | -.022 | 4.5 |
| 6 | MP3A | Mz | 0 | 4.5 |
| 7 | MP3B | Y | -43.55 | 2.5 |
| 8 | MP3B | My | .011 | 2.5 |
| 9 | MP3B | Mz | -.019 | 2.5 |
| 10 | MP3B | Y | -43.55 | 4.5 |
| 11 | MP3B | My | .011 | 4.5 |
| 12 | MP3B | Mz | -.019 | 4.5 |
| 13 | MP3C | Y | -43.55 | 2.5 |
| 14 | MP3C | My | .011 | 2.5 |
| 15 | MP3C | Mz | .019 | 2.5 |
| 16 | MP3C | Y | -43.55 | 4.5 |
| 17 | MP3C | My | .011 | 4.5 |
| 18 | MP3C | Mz | .019 | 4.5 |
| 19 | MP2A | Y | -10.4 | 2 |
| 20 | MP2A | My | .005 | 2 |
| 21 | MP2A | Mz | 0 | 2 |
| 22 | MP2B | Y | -10.4 | 2 |
| 23 | MP2B | My | -.003 | 2 |
| 24 | MP2B | Mz | .005 | 2 |
| 25 | MP2C | Y | -10.4 | 2 |
| 26 | MP2C | My | -.003 | 2 |
| 27 | MP2C | Mz | -.005 | 2 |
| 28 | MP2A | Y | -84.4 | 3.5 |
| 29 | MP2A | My | .042 | 3.5 |
| 30 | MP2A | Mz | 0 | 3.5 |
| 31 | MP2B | Y | -84.4 | 3.5 |
| 32 | MP2B | My | -.021 | 3.5 |
| 33 | MP2B | Mz | .037 | 3.5 |
| 34 | MP2C | Y | -84.4 | 3.5 |
| 35 | MP2C | My | -.021 | 3.5 |
| 36 | MP2C | Mz | -.037 | 3.5 |
| 37 | MP3A | Y | -70.3 | 3.5 |
| 38 | MP3A | My | .035 | 3.5 |
| 39 | MP3A | Mz | 0 | 3.5 |
| 40 | MP3B | Y | -70.3 | 3.5 |
| 41 | MP3B | My | -.018 | 3.5 |
| 42 | MP3B | Mz | .03 | 3.5 |
| 43 | MP3C | Y | -70.3 | 3.5 |
| 44 | MP3C | My | -.018 | 3.5 |
| 45 | MP3C | Mz | -.03 | 3.5 |
| 46 | MP2A | Y | -31.65 | 1.5 |
| 47 | MP2A | My | -.016 | 1.5 |
| 48 | MP2A | Mz | .018 | 1.5 |
| 49 | MP2A | Y | -31.65 | 5.5 |
| 50 | MP2A | My | -.016 | 5.5 |
| 51 | MP2A | Mz | .018 | 5.5 |
| 52 | MP2B | Y | -31.65 | 1.5 |
| 53 | MP2B | My | .008 | 1.5 |
| 54 | MP2B | Mz | .023 | 1.5 |
| 55 | MP2B | Y | -31.65 | 5.5 |
| 56 | MP2B | My | .008 | 5.5 |
| 57 | MP2B | Mz | .023 | 5.5 |
| 58 | MP2C | Y | -31.65 | 1.5 |

Member Point Loads (BLC 1 : Antenna D) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 59 | MP2C | My | -0.08 | 1.5 |
| 60 | MP2C | Mz | -0.23 | 1.5 |
| 61 | MP2C | Y | -31.65 | 5.5 |
| 62 | MP2C | My | -0.08 | 5.5 |
| 63 | MP2C | Mz | -0.23 | 5.5 |
| 64 | MP2A | Y | -31.65 | 1.5 |
| 65 | MP2A | My | -0.16 | 1.5 |
| 66 | MP2A | Mz | -0.18 | 1.5 |
| 67 | MP2A | Y | -31.65 | 5.5 |
| 68 | MP2A | My | -0.16 | 5.5 |
| 69 | MP2A | Mz | -0.18 | 5.5 |
| 70 | MP2B | Y | -31.65 | 1.5 |
| 71 | MP2B | My | -0.24 | 1.5 |
| 72 | MP2B | Mz | .004 | 1.5 |
| 73 | MP2B | Y | -31.65 | 5.5 |
| 74 | MP2B | My | -0.24 | 5.5 |
| 75 | MP2B | Mz | .004 | 5.5 |
| 76 | MP2C | Y | -31.65 | 1.5 |
| 77 | MP2C | My | -0.08 | 1.5 |
| 78 | MP2C | Mz | .023 | 1.5 |
| 79 | MP2C | Y | -31.65 | 5.5 |
| 80 | MP2C | My | -0.08 | 5.5 |
| 81 | MP2C | Mz | .023 | 5.5 |
| 82 | MP1A | Y | -13.5 | 1.5 |
| 83 | MP1A | My | -0.07 | 1.5 |
| 84 | MP1A | Mz | 0 | 1.5 |
| 85 | MP1A | Y | -13.5 | 5.5 |
| 86 | MP1A | My | -0.07 | 5.5 |
| 87 | MP1A | Mz | 0 | 5.5 |
| 88 | MP1B | Y | -13.5 | 1.5 |
| 89 | MP1B | My | .003 | 1.5 |
| 90 | MP1B | Mz | -0.06 | 1.5 |
| 91 | MP1B | Y | -13.5 | 5.5 |
| 92 | MP1B | My | .003 | 5.5 |
| 93 | MP1B | Mz | -0.06 | 5.5 |
| 94 | MP1C | Y | -13.5 | 1.5 |
| 95 | MP1C | My | .003 | 1.5 |
| 96 | MP1C | Mz | .006 | 1.5 |
| 97 | MP1C | Y | -13.5 | 5.5 |
| 98 | MP1C | My | .003 | 5.5 |
| 99 | MP1C | Mz | .006 | 5.5 |
| 100 | MP4A | Y | -13.5 | 1.5 |
| 101 | MP4A | My | -0.07 | 1.5 |
| 102 | MP4A | Mz | 0 | 1.5 |
| 103 | MP4A | Y | -13.5 | 5.5 |
| 104 | MP4A | My | -0.07 | 5.5 |
| 105 | MP4A | Mz | 0 | 5.5 |
| 106 | MP4B | Y | -13.5 | 1.5 |
| 107 | MP4B | My | .003 | 1.5 |
| 108 | MP4B | Mz | -0.06 | 1.5 |
| 109 | MP4B | Y | -13.5 | 5.5 |
| 110 | MP4B | My | .003 | 5.5 |
| 111 | MP4B | Mz | -0.06 | 5.5 |
| 112 | MP4C | Y | -13.5 | 1.5 |
| 113 | MP4C | My | .003 | 1.5 |
| 114 | MP4C | Mz | .006 | 1.5 |
| 115 | MP4C | Y | -13.5 | 5.5 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Point Loads (BLC 1 : Antenna D) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 116 | MP4C | My | .003 | 5.5 |
| 117 | MP4C | Mz | .006 | 5.5 |

Member Point Loads (BLC 2 : Antenna Di)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | Y | -35.838 | 2.5 |
| 2 | MP3A | My | -.018 | 2.5 |
| 3 | MP3A | Mz | 0 | 2.5 |
| 4 | MP3A | Y | -35.838 | 4.5 |
| 5 | MP3A | My | -.018 | 4.5 |
| 6 | MP3A | Mz | 0 | 4.5 |
| 7 | MP3B | Y | -35.838 | 2.5 |
| 8 | MP3B | My | .009 | 2.5 |
| 9 | MP3B | Mz | -.016 | 2.5 |
| 10 | MP3B | Y | -35.838 | 4.5 |
| 11 | MP3B | My | .009 | 4.5 |
| 12 | MP3B | Mz | -.016 | 4.5 |
| 13 | MP3C | Y | -35.838 | 2.5 |
| 14 | MP3C | My | .009 | 2.5 |
| 15 | MP3C | Mz | .016 | 2.5 |
| 16 | MP3C | Y | -35.838 | 4.5 |
| 17 | MP3C | My | .009 | 4.5 |
| 18 | MP3C | Mz | .016 | 4.5 |
| 19 | MP2A | Y | -10.818 | 2 |
| 20 | MP2A | My | .005 | 2 |
| 21 | MP2A | Mz | 0 | 2 |
| 22 | MP2B | Y | -10.818 | 2 |
| 23 | MP2B | My | -.003 | 2 |
| 24 | MP2B | Mz | .005 | 2 |
| 25 | MP2C | Y | -10.818 | 2 |
| 26 | MP2C | My | -.003 | 2 |
| 27 | MP2C | Mz | -.005 | 2 |
| 28 | MP2A | Y | -45.188 | 3.5 |
| 29 | MP2A | My | .023 | 3.5 |
| 30 | MP2A | Mz | 0 | 3.5 |
| 31 | MP2B | Y | -45.188 | 3.5 |
| 32 | MP2B | My | -.011 | 3.5 |
| 33 | MP2B | Mz | .02 | 3.5 |
| 34 | MP2C | Y | -45.188 | 3.5 |
| 35 | MP2C | My | -.011 | 3.5 |
| 36 | MP2C | Mz | -.02 | 3.5 |
| 37 | MP3A | Y | -40.639 | 3.5 |
| 38 | MP3A | My | .02 | 3.5 |
| 39 | MP3A | Mz | 0 | 3.5 |
| 40 | MP3B | Y | -40.639 | 3.5 |
| 41 | MP3B | My | -.01 | 3.5 |
| 42 | MP3B | Mz | .018 | 3.5 |
| 43 | MP3C | Y | -40.639 | 3.5 |
| 44 | MP3C | My | -.01 | 3.5 |
| 45 | MP3C | Mz | -.018 | 3.5 |
| 46 | MP2A | Y | -70.381 | 1.5 |
| 47 | MP2A | My | -.035 | 1.5 |
| 48 | MP2A | Mz | .041 | 1.5 |
| 49 | MP2A | Y | -70.381 | 5.5 |
| 50 | MP2A | My | -.035 | 5.5 |
| 51 | MP2A | Mz | .041 | 5.5 |

Member Point Loads (BLC 2 : Antenna Di) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 52 | MP2B | Y | -70.381 | 1.5 |
| 53 | MP2B | My | .018 | 1.5 |
| 54 | MP2B | Mz | .051 | 1.5 |
| 55 | MP2B | Y | -70.381 | 5.5 |
| 56 | MP2B | My | .018 | 5.5 |
| 57 | MP2B | Mz | .051 | 5.5 |
| 58 | MP2C | Y | -70.381 | 1.5 |
| 59 | MP2C | My | -.018 | 1.5 |
| 60 | MP2C | Mz | -.051 | 1.5 |
| 61 | MP2C | Y | -70.381 | 5.5 |
| 62 | MP2C | My | -.018 | 5.5 |
| 63 | MP2C | Mz | -.051 | 5.5 |
| 64 | MP2A | Y | -70.381 | 1.5 |
| 65 | MP2A | My | -.035 | 1.5 |
| 66 | MP2A | Mz | -.041 | 1.5 |
| 67 | MP2A | Y | -70.381 | 5.5 |
| 68 | MP2A | My | -.035 | 5.5 |
| 69 | MP2A | Mz | -.041 | 5.5 |
| 70 | MP2B | Y | -70.381 | 1.5 |
| 71 | MP2B | My | -.053 | 1.5 |
| 72 | MP2B | Mz | .01 | 1.5 |
| 73 | MP2B | Y | -70.381 | 5.5 |
| 74 | MP2B | My | -.053 | 5.5 |
| 75 | MP2B | Mz | .01 | 5.5 |
| 76 | MP2C | Y | -70.381 | 1.5 |
| 77 | MP2C | My | -.018 | 1.5 |
| 78 | MP2C | Mz | .051 | 1.5 |
| 79 | MP2C | Y | -70.381 | 5.5 |
| 80 | MP2C | My | -.018 | 5.5 |
| 81 | MP2C | Mz | .051 | 5.5 |
| 82 | MP1A | Y | -89.214 | 1.5 |
| 83 | MP1A | My | -.045 | 1.5 |
| 84 | MP1A | Mz | 0 | 1.5 |
| 85 | MP1A | Y | -89.214 | 5.5 |
| 86 | MP1A | My | -.045 | 5.5 |
| 87 | MP1A | Mz | 0 | 5.5 |
| 88 | MP1B | Y | -89.214 | 1.5 |
| 89 | MP1B | My | .022 | 1.5 |
| 90 | MP1B | Mz | -.039 | 1.5 |
| 91 | MP1B | Y | -89.214 | 5.5 |
| 92 | MP1B | My | .022 | 5.5 |
| 93 | MP1B | Mz | -.039 | 5.5 |
| 94 | MP1C | Y | -89.214 | 1.5 |
| 95 | MP1C | My | .022 | 1.5 |
| 96 | MP1C | Mz | .039 | 1.5 |
| 97 | MP1C | Y | -89.214 | 5.5 |
| 98 | MP1C | My | .022 | 5.5 |
| 99 | MP1C | Mz | .039 | 5.5 |
| 100 | MP4A | Y | -89.214 | 1.5 |
| 101 | MP4A | My | -.045 | 1.5 |
| 102 | MP4A | Mz | 0 | 1.5 |
| 103 | MP4A | Y | -89.214 | 5.5 |
| 104 | MP4A | My | -.045 | 5.5 |
| 105 | MP4A | Mz | 0 | 5.5 |
| 106 | MP4B | Y | -89.214 | 1.5 |
| 107 | MP4B | My | .022 | 1.5 |
| 108 | MP4B | Mz | -.039 | 1.5 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Point Loads (BLC 2 : Antenna Di) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.-%] |
|-----|--------------|-----------|--------------------|-----------------|
| 109 | MP4B | Y | -89.214 | 5.5 |
| 110 | MP4B | My | .022 | 5.5 |
| 111 | MP4B | Mz | -.039 | 5.5 |
| 112 | MP4C | Y | -89.214 | 1.5 |
| 113 | MP4C | My | .022 | 1.5 |
| 114 | MP4C | Mz | .039 | 1.5 |
| 115 | MP4C | Y | -89.214 | 5.5 |
| 116 | MP4C | My | .022 | 5.5 |
| 117 | MP4C | Mz | .039 | 5.5 |

Member Point Loads (BLC 3 : Antenna Wo (0 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.-%] |
|----|--------------|-----------|--------------------|-----------------|
| 1 | MP3A | X | 0 | 2.5 |
| 2 | MP3A | Z | -94.227 | 2.5 |
| 3 | MP3A | Mx | 0 | 2.5 |
| 4 | MP3A | X | 0 | 4.5 |
| 5 | MP3A | Z | -94.227 | 4.5 |
| 6 | MP3A | Mx | 0 | 4.5 |
| 7 | MP3B | X | 0 | 2.5 |
| 8 | MP3B | Z | -51.224 | 2.5 |
| 9 | MP3B | Mx | .022 | 2.5 |
| 10 | MP3B | X | 0 | 4.5 |
| 11 | MP3B | Z | -51.224 | 4.5 |
| 12 | MP3B | Mx | .022 | 4.5 |
| 13 | MP3C | X | 0 | 2.5 |
| 14 | MP3C | Z | -51.224 | 2.5 |
| 15 | MP3C | Mx | -.022 | 2.5 |
| 16 | MP3C | X | 0 | 4.5 |
| 17 | MP3C | Z | -51.224 | 4.5 |
| 18 | MP3C | Mx | -.022 | 4.5 |
| 19 | MP2A | X | 0 | 2 |
| 20 | MP2A | Z | -14.836 | 2 |
| 21 | MP2A | Mx | 0 | 2 |
| 22 | MP2B | X | 0 | 2 |
| 23 | MP2B | Z | -11.407 | 2 |
| 24 | MP2B | Mx | -.005 | 2 |
| 25 | MP2C | X | 0 | 2 |
| 26 | MP2C | Z | -11.407 | 2 |
| 27 | MP2C | Mx | .005 | 2 |
| 28 | MP2A | X | 0 | 3.5 |
| 29 | MP2A | Z | -74.981 | 3.5 |
| 30 | MP2A | Mx | 0 | 3.5 |
| 31 | MP2B | X | 0 | 3.5 |
| 32 | MP2B | Z | -56.336 | 3.5 |
| 33 | MP2B | Mx | -.024 | 3.5 |
| 34 | MP2C | X | 0 | 3.5 |
| 35 | MP2C | Z | -56.336 | 3.5 |
| 36 | MP2C | Mx | .024 | 3.5 |
| 37 | MP3A | X | 0 | 3.5 |
| 38 | MP3A | Z | -74.981 | 3.5 |
| 39 | MP3A | Mx | 0 | 3.5 |
| 40 | MP3B | X | 0 | 3.5 |
| 41 | MP3B | Z | -49.194 | 3.5 |
| 42 | MP3B | Mx | -.021 | 3.5 |
| 43 | MP3C | X | 0 | 3.5 |
| 44 | MP3C | Z | -49.194 | 3.5 |

Member Point Loads (BLC 3 : Antenna Wo (0 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 45 | MP3C | Mx | .021 | 3.5 |
| 46 | MP2A | X | 0 | 1.5 |
| 47 | MP2A | Z | -182.64 | 1.5 |
| 48 | MP2A | Mx | -.107 | 1.5 |
| 49 | MP2A | X | 0 | 5.5 |
| 50 | MP2A | Z | -182.64 | 5.5 |
| 51 | MP2A | Mx | -.107 | 5.5 |
| 52 | MP2B | X | 0 | 1.5 |
| 53 | MP2B | Z | -135.627 | 1.5 |
| 54 | MP2B | Mx | -.098 | 1.5 |
| 55 | MP2B | X | 0 | 5.5 |
| 56 | MP2B | Z | -135.627 | 5.5 |
| 57 | MP2B | Mx | -.098 | 5.5 |
| 58 | MP2C | X | 0 | 1.5 |
| 59 | MP2C | Z | -135.627 | 1.5 |
| 60 | MP2C | Mx | .098 | 1.5 |
| 61 | MP2C | X | 0 | 5.5 |
| 62 | MP2C | Z | -135.627 | 5.5 |
| 63 | MP2C | Mx | .098 | 5.5 |
| 64 | MP2A | X | 0 | 1.5 |
| 65 | MP2A | Z | -182.64 | 1.5 |
| 66 | MP2A | Mx | .107 | 1.5 |
| 67 | MP2A | X | 0 | 5.5 |
| 68 | MP2A | Z | -182.64 | 5.5 |
| 69 | MP2A | Mx | .107 | 5.5 |
| 70 | MP2B | X | 0 | 1.5 |
| 71 | MP2B | Z | -135.627 | 1.5 |
| 72 | MP2B | Mx | -.019 | 1.5 |
| 73 | MP2B | X | 0 | 5.5 |
| 74 | MP2B | Z | -135.627 | 5.5 |
| 75 | MP2B | Mx | -.019 | 5.5 |
| 76 | MP2C | X | 0 | 1.5 |
| 77 | MP2C | Z | -135.627 | 1.5 |
| 78 | MP2C | Mx | -.098 | 1.5 |
| 79 | MP2C | X | 0 | 5.5 |
| 80 | MP2C | Z | -135.627 | 5.5 |
| 81 | MP2C | Mx | -.098 | 5.5 |
| 82 | MP1A | X | 0 | 1.5 |
| 83 | MP1A | Z | -192.464 | 1.5 |
| 84 | MP1A | Mx | 0 | 1.5 |
| 85 | MP1A | X | 0 | 5.5 |
| 86 | MP1A | Z | -192.464 | 5.5 |
| 87 | MP1A | Mx | 0 | 5.5 |
| 88 | MP1B | X | 0 | 1.5 |
| 89 | MP1B | Z | -177.048 | 1.5 |
| 90 | MP1B | Mx | .077 | 1.5 |
| 91 | MP1B | X | 0 | 5.5 |
| 92 | MP1B | Z | -177.048 | 5.5 |
| 93 | MP1B | Mx | .077 | 5.5 |
| 94 | MP1C | X | 0 | 1.5 |
| 95 | MP1C | Z | -177.048 | 1.5 |
| 96 | MP1C | Mx | -.077 | 1.5 |
| 97 | MP1C | X | 0 | 5.5 |
| 98 | MP1C | Z | -177.048 | 5.5 |
| 99 | MP1C | Mx | -.077 | 5.5 |
| 100 | MP4A | X | 0 | 1.5 |
| 101 | MP4A | Z | -192.464 | 1.5 |

Member Point Loads (BLC 3 : Antenna Wo (0 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 102 | MP4A | Mx | 0 | 1.5 |
| 103 | MP4A | X | 0 | 5.5 |
| 104 | MP4A | Z | -192.464 | 5.5 |
| 105 | MP4A | Mx | 0 | 5.5 |
| 106 | MP4B | X | 0 | 1.5 |
| 107 | MP4B | Z | -177.048 | 1.5 |
| 108 | MP4B | Mx | .077 | 1.5 |
| 109 | MP4B | X | 0 | 5.5 |
| 110 | MP4B | Z | -177.048 | 5.5 |
| 111 | MP4B | Mx | .077 | 5.5 |
| 112 | MP4C | X | 0 | 1.5 |
| 113 | MP4C | Z | -177.048 | 1.5 |
| 114 | MP4C | Mx | -.077 | 1.5 |
| 115 | MP4C | X | 0 | 5.5 |
| 116 | MP4C | Z | -177.048 | 5.5 |
| 117 | MP4C | Mx | -.077 | 5.5 |

Member Point Loads (BLC 4 : Antenna Wo (30 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 39.946 | 2.5 |
| 2 | MP3A | Z | -69.189 | 2.5 |
| 3 | MP3A | Mx | -.02 | 2.5 |
| 4 | MP3A | X | 39.946 | 4.5 |
| 5 | MP3A | Z | -69.189 | 4.5 |
| 6 | MP3A | Mx | -.02 | 4.5 |
| 7 | MP3B | X | 18.445 | 2.5 |
| 8 | MP3B | Z | -31.947 | 2.5 |
| 9 | MP3B | Mx | .018 | 2.5 |
| 10 | MP3B | X | 18.445 | 4.5 |
| 11 | MP3B | Z | -31.947 | 4.5 |
| 12 | MP3B | Mx | .018 | 4.5 |
| 13 | MP3C | X | 39.946 | 2.5 |
| 14 | MP3C | Z | -69.189 | 2.5 |
| 15 | MP3C | Mx | -.02 | 2.5 |
| 16 | MP3C | X | 39.946 | 4.5 |
| 17 | MP3C | Z | -69.189 | 4.5 |
| 18 | MP3C | Mx | -.02 | 4.5 |
| 19 | MP2A | X | 6.846 | 2 |
| 20 | MP2A | Z | -11.858 | 2 |
| 21 | MP2A | Mx | .003 | 2 |
| 22 | MP2B | X | 5.132 | 2 |
| 23 | MP2B | Z | -8.89 | 2 |
| 24 | MP2B | Mx | -.005 | 2 |
| 25 | MP2C | X | 6.846 | 2 |
| 26 | MP2C | Z | -11.858 | 2 |
| 27 | MP2C | Mx | .003 | 2 |
| 28 | MP2A | X | 34.383 | 3.5 |
| 29 | MP2A | Z | -59.553 | 3.5 |
| 30 | MP2A | Mx | .017 | 3.5 |
| 31 | MP2B | X | 25.06 | 3.5 |
| 32 | MP2B | Z | -43.406 | 3.5 |
| 33 | MP2B | Mx | -.025 | 3.5 |
| 34 | MP2C | X | 34.383 | 3.5 |
| 35 | MP2C | Z | -59.553 | 3.5 |
| 36 | MP2C | Mx | .017 | 3.5 |
| 37 | MP3A | X | 33.192 | 3.5 |

Member Point Loads (BLC 4 : Antenna Wo (30 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft,%] |
|----|--------------|-----------|--------------------|----------------|
| 38 | MP3A | Z | -57.491 | 3.5 |
| 39 | MP3A | Mx | .017 | 3.5 |
| 40 | MP3B | X | 20.299 | 3.5 |
| 41 | MP3B | Z | -35.159 | 3.5 |
| 42 | MP3B | Mx | -.02 | 3.5 |
| 43 | MP3C | X | 33.192 | 3.5 |
| 44 | MP3C | Z | -57.491 | 3.5 |
| 45 | MP3C | Mx | .017 | 3.5 |
| 46 | MP2A | X | 83.484 | 1.5 |
| 47 | MP2A | Z | -144.599 | 1.5 |
| 48 | MP2A | Mx | -.126 | 1.5 |
| 49 | MP2A | X | 83.484 | 5.5 |
| 50 | MP2A | Z | -144.599 | 5.5 |
| 51 | MP2A | Mx | -.126 | 5.5 |
| 52 | MP2B | X | 59.978 | 1.5 |
| 53 | MP2B | Z | -103.885 | 1.5 |
| 54 | MP2B | Mx | -.06 | 1.5 |
| 55 | MP2B | X | 59.978 | 5.5 |
| 56 | MP2B | Z | -103.885 | 5.5 |
| 57 | MP2B | Mx | -.06 | 5.5 |
| 58 | MP2C | X | 59.978 | 1.5 |
| 59 | MP2C | Z | -103.885 | 1.5 |
| 60 | MP2C | Mx | .06 | 1.5 |
| 61 | MP2C | X | 59.978 | 5.5 |
| 62 | MP2C | Z | -103.885 | 5.5 |
| 63 | MP2C | Mx | .06 | 5.5 |
| 64 | MP2A | X | 83.484 | 1.5 |
| 65 | MP2A | Z | -144.599 | 1.5 |
| 66 | MP2A | Mx | .043 | 1.5 |
| 67 | MP2A | X | 83.484 | 5.5 |
| 68 | MP2A | Z | -144.599 | 5.5 |
| 69 | MP2A | Mx | .043 | 5.5 |
| 70 | MP2B | X | 59.978 | 1.5 |
| 71 | MP2B | Z | -103.885 | 1.5 |
| 72 | MP2B | Mx | -.06 | 1.5 |
| 73 | MP2B | X | 59.978 | 5.5 |
| 74 | MP2B | Z | -103.885 | 5.5 |
| 75 | MP2B | Mx | -.06 | 5.5 |
| 76 | MP2C | X | 83.484 | 1.5 |
| 77 | MP2C | Z | -144.599 | 1.5 |
| 78 | MP2C | Mx | -.126 | 1.5 |
| 79 | MP2C | X | 83.484 | 5.5 |
| 80 | MP2C | Z | -144.599 | 5.5 |
| 81 | MP2C | Mx | -.126 | 5.5 |
| 82 | MP1A | X | 93.663 | 1.5 |
| 83 | MP1A | Z | -162.228 | 1.5 |
| 84 | MP1A | Mx | -.047 | 1.5 |
| 85 | MP1A | X | 93.663 | 5.5 |
| 86 | MP1A | Z | -162.228 | 5.5 |
| 87 | MP1A | Mx | -.047 | 5.5 |
| 88 | MP1B | X | 85.955 | 1.5 |
| 89 | MP1B | Z | -148.878 | 1.5 |
| 90 | MP1B | Mx | .086 | 1.5 |
| 91 | MP1B | X | 85.955 | 5.5 |
| 92 | MP1B | Z | -148.878 | 5.5 |
| 93 | MP1B | Mx | .086 | 5.5 |
| 94 | MP1C | X | 93.663 | 1.5 |

Member Point Loads (BLC 4 : Antenna Wo (30 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft. %] |
|-----|--------------|-----------|--------------------|-----------------|
| 95 | MP1C | Z | -162.228 | 1.5 |
| 96 | MP1C | Mx | -.047 | 1.5 |
| 97 | MP1C | X | 93.663 | 5.5 |
| 98 | MP1C | Z | -162.228 | 5.5 |
| 99 | MP1C | Mx | -.047 | 5.5 |
| 100 | MP4A | X | 93.663 | 1.5 |
| 101 | MP4A | Z | -162.228 | 1.5 |
| 102 | MP4A | Mx | -.047 | 1.5 |
| 103 | MP4A | X | 93.663 | 5.5 |
| 104 | MP4A | Z | -162.228 | 5.5 |
| 105 | MP4A | Mx | -.047 | 5.5 |
| 106 | MP4B | X | 85.955 | 1.5 |
| 107 | MP4B | Z | -148.878 | 1.5 |
| 108 | MP4B | Mx | .086 | 1.5 |
| 109 | MP4B | X | 85.955 | 5.5 |
| 110 | MP4B | Z | -148.878 | 5.5 |
| 111 | MP4B | Mx | .086 | 5.5 |
| 112 | MP4C | X | 93.663 | 1.5 |
| 113 | MP4C | Z | -162.228 | 1.5 |
| 114 | MP4C | Mx | -.047 | 1.5 |
| 115 | MP4C | X | 93.663 | 5.5 |
| 116 | MP4C | Z | -162.228 | 5.5 |
| 117 | MP4C | Mx | -.047 | 5.5 |

Member Point Loads (BLC 5 : Antenna Wo (60 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft. %] |
|----|--------------|-----------|--------------------|-----------------|
| 1 | MP3A | X | 44.361 | 2.5 |
| 2 | MP3A | Z | -25.612 | 2.5 |
| 3 | MP3A | Mx | -.022 | 2.5 |
| 4 | MP3A | X | 44.361 | 4.5 |
| 5 | MP3A | Z | -25.612 | 4.5 |
| 6 | MP3A | Mx | -.022 | 4.5 |
| 7 | MP3B | X | 44.361 | 2.5 |
| 8 | MP3B | Z | -25.612 | 2.5 |
| 9 | MP3B | Mx | .022 | 2.5 |
| 10 | MP3B | X | 44.361 | 4.5 |
| 11 | MP3B | Z | -25.612 | 4.5 |
| 12 | MP3B | Mx | .022 | 4.5 |
| 13 | MP3C | X | 81.603 | 2.5 |
| 14 | MP3C | Z | -47.114 | 2.5 |
| 15 | MP3C | Mx | 0 | 2.5 |
| 16 | MP3C | X | 81.603 | 4.5 |
| 17 | MP3C | Z | -47.114 | 4.5 |
| 18 | MP3C | Mx | 0 | 4.5 |
| 19 | MP2A | X | 9.879 | 2 |
| 20 | MP2A | Z | -5.704 | 2 |
| 21 | MP2A | Mx | .005 | 2 |
| 22 | MP2B | X | 9.879 | 2 |
| 23 | MP2B | Z | -5.704 | 2 |
| 24 | MP2B | Mx | -.005 | 2 |
| 25 | MP2C | X | 12.848 | 2 |
| 26 | MP2C | Z | -7.418 | 2 |
| 27 | MP2C | Mx | 0 | 2 |
| 28 | MP2A | X | 48.788 | 3.5 |
| 29 | MP2A | Z | -28.168 | 3.5 |
| 30 | MP2A | Mx | .024 | 3.5 |

Member Point Loads (BLC 5 : Antenna Wo (60 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 31 | MP2B | X | 48.788 | 3.5 |
| 32 | MP2B | Z | -28.168 | 3.5 |
| 33 | MP2B | Mx | -.024 | 3.5 |
| 34 | MP2C | X | 64.935 | 3.5 |
| 35 | MP2C | Z | -37.49 | 3.5 |
| 36 | MP2C | Mx | 0 | 3.5 |
| 37 | MP3A | X | 42.603 | 3.5 |
| 38 | MP3A | Z | -24.597 | 3.5 |
| 39 | MP3A | Mx | .021 | 3.5 |
| 40 | MP3B | X | 42.603 | 3.5 |
| 41 | MP3B | Z | -24.597 | 3.5 |
| 42 | MP3B | Mx | -.021 | 3.5 |
| 43 | MP3C | X | 64.935 | 3.5 |
| 44 | MP3C | Z | -37.49 | 3.5 |
| 45 | MP3C | Mx | 0 | 3.5 |
| 46 | MP2A | X | 117.456 | 1.5 |
| 47 | MP2A | Z | -67.813 | 1.5 |
| 48 | MP2A | Mx | -.098 | 1.5 |
| 49 | MP2A | X | 117.456 | 5.5 |
| 50 | MP2A | Z | -67.813 | 5.5 |
| 51 | MP2A | Mx | -.098 | 5.5 |
| 52 | MP2B | X | 117.456 | 1.5 |
| 53 | MP2B | Z | -67.813 | 1.5 |
| 54 | MP2B | Mx | -.019 | 1.5 |
| 55 | MP2B | X | 117.456 | 5.5 |
| 56 | MP2B | Z | -67.813 | 5.5 |
| 57 | MP2B | Mx | -.019 | 5.5 |
| 58 | MP2C | X | 117.456 | 1.5 |
| 59 | MP2C | Z | -67.813 | 1.5 |
| 60 | MP2C | Mx | .019 | 1.5 |
| 61 | MP2C | X | 117.456 | 5.5 |
| 62 | MP2C | Z | -67.813 | 5.5 |
| 63 | MP2C | Mx | .019 | 5.5 |
| 64 | MP2A | X | 117.456 | 1.5 |
| 65 | MP2A | Z | -67.813 | 1.5 |
| 66 | MP2A | Mx | -.019 | 1.5 |
| 67 | MP2A | X | 117.456 | 5.5 |
| 68 | MP2A | Z | -67.813 | 5.5 |
| 69 | MP2A | Mx | -.019 | 5.5 |
| 70 | MP2B | X | 117.456 | 1.5 |
| 71 | MP2B | Z | -67.813 | 1.5 |
| 72 | MP2B | Mx | -.098 | 1.5 |
| 73 | MP2B | X | 117.456 | 5.5 |
| 74 | MP2B | Z | -67.813 | 5.5 |
| 75 | MP2B | Mx | -.098 | 5.5 |
| 76 | MP2C | X | 158.171 | 1.5 |
| 77 | MP2C | Z | -91.32 | 1.5 |
| 78 | MP2C | Mx | -.107 | 1.5 |
| 79 | MP2C | X | 158.171 | 5.5 |
| 80 | MP2C | Z | -91.32 | 5.5 |
| 81 | MP2C | Mx | -.107 | 5.5 |
| 82 | MP1A | X | 153.328 | 1.5 |
| 83 | MP1A | Z | -88.524 | 1.5 |
| 84 | MP1A | Mx | -.077 | 1.5 |
| 85 | MP1A | X | 153.328 | 5.5 |
| 86 | MP1A | Z | -88.524 | 5.5 |
| 87 | MP1A | Mx | -.077 | 5.5 |

Member Point Loads (BLC 5 : Antenna Wo (60 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 88 | MP1B | X | 153.328 | 1.5 |
| 89 | MP1B | Z | -88.524 | 1.5 |
| 90 | MP1B | Mx | .077 | 1.5 |
| 91 | MP1B | X | 153.328 | 5.5 |
| 92 | MP1B | Z | -88.524 | 5.5 |
| 93 | MP1B | Mx | .077 | 5.5 |
| 94 | MP1C | X | 166.678 | 1.5 |
| 95 | MP1C | Z | -96.232 | 1.5 |
| 96 | MP1C | Mx | 0 | 1.5 |
| 97 | MP1C | X | 166.678 | 5.5 |
| 98 | MP1C | Z | -96.232 | 5.5 |
| 99 | MP1C | Mx | 0 | 5.5 |
| 100 | MP4A | X | 153.328 | 1.5 |
| 101 | MP4A | Z | -88.524 | 1.5 |
| 102 | MP4A | Mx | -.077 | 1.5 |
| 103 | MP4A | X | 153.328 | 5.5 |
| 104 | MP4A | Z | -88.524 | 5.5 |
| 105 | MP4A | Mx | -.077 | 5.5 |
| 106 | MP4B | X | 153.328 | 1.5 |
| 107 | MP4B | Z | -88.524 | 1.5 |
| 108 | MP4B | Mx | .077 | 1.5 |
| 109 | MP4B | X | 153.328 | 5.5 |
| 110 | MP4B | Z | -88.524 | 5.5 |
| 111 | MP4B | Mx | .077 | 5.5 |
| 112 | MP4C | X | 166.678 | 1.5 |
| 113 | MP4C | Z | -96.232 | 1.5 |
| 114 | MP4C | Mx | 0 | 1.5 |
| 115 | MP4C | X | 166.678 | 5.5 |
| 116 | MP4C | Z | -96.232 | 5.5 |
| 117 | MP4C | Mx | 0 | 5.5 |

Member Point Loads (BLC 6 : Antenna Wo (90 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 36.89 | 2.5 |
| 2 | MP3A | Z | 0 | 2.5 |
| 3 | MP3A | Mx | -.018 | 2.5 |
| 4 | MP3A | X | 36.89 | 4.5 |
| 5 | MP3A | Z | 0 | 4.5 |
| 6 | MP3A | Mx | -.018 | 4.5 |
| 7 | MP3B | X | 79.893 | 2.5 |
| 8 | MP3B | Z | 0 | 2.5 |
| 9 | MP3B | Mx | .02 | 2.5 |
| 10 | MP3B | X | 79.893 | 4.5 |
| 11 | MP3B | Z | 0 | 4.5 |
| 12 | MP3B | Mx | .02 | 4.5 |
| 13 | MP3C | X | 79.893 | 2.5 |
| 14 | MP3C | Z | 0 | 2.5 |
| 15 | MP3C | Mx | .02 | 2.5 |
| 16 | MP3C | X | 79.893 | 4.5 |
| 17 | MP3C | Z | 0 | 4.5 |
| 18 | MP3C | Mx | .02 | 4.5 |
| 19 | MP2A | X | 10.265 | 2 |
| 20 | MP2A | Z | 0 | 2 |
| 21 | MP2A | Mx | .005 | 2 |
| 22 | MP2B | X | 13.693 | 2 |
| 23 | MP2B | Z | 0 | 2 |

Member Point Loads (BLC 6 : Antenna Wo (90 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 24 | MP2B | Mx | -0.03 | 2 |
| 25 | MP2C | X | 13.693 | 2 |
| 26 | MP2C | Z | 0 | 2 |
| 27 | MP2C | Mx | -0.03 | 2 |
| 28 | MP2A | X | 50.121 | 3.5 |
| 29 | MP2A | Z | 0 | 3.5 |
| 30 | MP2A | Mx | .025 | 3.5 |
| 31 | MP2B | X | 68.766 | 3.5 |
| 32 | MP2B | Z | 0 | 3.5 |
| 33 | MP2B | Mx | -.017 | 3.5 |
| 34 | MP2C | X | 68.766 | 3.5 |
| 35 | MP2C | Z | 0 | 3.5 |
| 36 | MP2C | Mx | -.017 | 3.5 |
| 37 | MP3A | X | 40.598 | 3.5 |
| 38 | MP3A | Z | 0 | 3.5 |
| 39 | MP3A | Mx | .02 | 3.5 |
| 40 | MP3B | X | 66.385 | 3.5 |
| 41 | MP3B | Z | 0 | 3.5 |
| 42 | MP3B | Mx | -.017 | 3.5 |
| 43 | MP3C | X | 66.385 | 3.5 |
| 44 | MP3C | Z | 0 | 3.5 |
| 45 | MP3C | Mx | -.017 | 3.5 |
| 46 | MP2A | X | 119.956 | 1.5 |
| 47 | MP2A | Z | 0 | 1.5 |
| 48 | MP2A | Mx | -.06 | 1.5 |
| 49 | MP2A | X | 119.956 | 5.5 |
| 50 | MP2A | Z | 0 | 5.5 |
| 51 | MP2A | Mx | -.06 | 5.5 |
| 52 | MP2B | X | 166.969 | 1.5 |
| 53 | MP2B | Z | 0 | 1.5 |
| 54 | MP2B | Mx | .043 | 1.5 |
| 55 | MP2B | X | 166.969 | 5.5 |
| 56 | MP2B | Z | 0 | 5.5 |
| 57 | MP2B | Mx | .043 | 5.5 |
| 58 | MP2C | X | 166.969 | 1.5 |
| 59 | MP2C | Z | 0 | 1.5 |
| 60 | MP2C | Mx | -.043 | 1.5 |
| 61 | MP2C | X | 166.969 | 5.5 |
| 62 | MP2C | Z | 0 | 5.5 |
| 63 | MP2C | Mx | -.043 | 5.5 |
| 64 | MP2A | X | 119.956 | 1.5 |
| 65 | MP2A | Z | 0 | 1.5 |
| 66 | MP2A | Mx | -.06 | 1.5 |
| 67 | MP2A | X | 119.956 | 5.5 |
| 68 | MP2A | Z | 0 | 5.5 |
| 69 | MP2A | Mx | -.06 | 5.5 |
| 70 | MP2B | X | 166.969 | 1.5 |
| 71 | MP2B | Z | 0 | 1.5 |
| 72 | MP2B | Mx | -.126 | 1.5 |
| 73 | MP2B | X | 166.969 | 5.5 |
| 74 | MP2B | Z | 0 | 5.5 |
| 75 | MP2B | Mx | -.126 | 5.5 |
| 76 | MP2C | X | 166.969 | 1.5 |
| 77 | MP2C | Z | 0 | 1.5 |
| 78 | MP2C | Mx | -.043 | 1.5 |
| 79 | MP2C | X | 166.969 | 5.5 |
| 80 | MP2C | Z | 0 | 5.5 |

Member Point Loads (BLC 6 : Antenna Wo (90 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 81 | MP2C | Mx | -.043 | 5.5 |
| 82 | MP1A | X | 171.909 | 1.5 |
| 83 | MP1A | Z | 0 | 1.5 |
| 84 | MP1A | Mx | -.086 | 1.5 |
| 85 | MP1A | X | 171.909 | 5.5 |
| 86 | MP1A | Z | 0 | 5.5 |
| 87 | MP1A | Mx | -.086 | 5.5 |
| 88 | MP1B | X | 187.325 | 1.5 |
| 89 | MP1B | Z | 0 | 1.5 |
| 90 | MP1B | Mx | .047 | 1.5 |
| 91 | MP1B | X | 187.325 | 5.5 |
| 92 | MP1B | Z | 0 | 5.5 |
| 93 | MP1B | Mx | .047 | 5.5 |
| 94 | MP1C | X | 187.325 | 1.5 |
| 95 | MP1C | Z | 0 | 1.5 |
| 96 | MP1C | Mx | .047 | 1.5 |
| 97 | MP1C | X | 187.325 | 5.5 |
| 98 | MP1C | Z | 0 | 5.5 |
| 99 | MP1C | Mx | .047 | 5.5 |
| 100 | MP4A | X | 171.909 | 1.5 |
| 101 | MP4A | Z | 0 | 1.5 |
| 102 | MP4A | Mx | -.086 | 1.5 |
| 103 | MP4A | X | 171.909 | 5.5 |
| 104 | MP4A | Z | 0 | 5.5 |
| 105 | MP4A | Mx | -.086 | 5.5 |
| 106 | MP4B | X | 187.325 | 1.5 |
| 107 | MP4B | Z | 0 | 1.5 |
| 108 | MP4B | Mx | .047 | 1.5 |
| 109 | MP4B | X | 187.325 | 5.5 |
| 110 | MP4B | Z | 0 | 5.5 |
| 111 | MP4B | Mx | .047 | 5.5 |
| 112 | MP4C | X | 187.325 | 1.5 |
| 113 | MP4C | Z | 0 | 1.5 |
| 114 | MP4C | Mx | .047 | 1.5 |
| 115 | MP4C | X | 187.325 | 5.5 |
| 116 | MP4C | Z | 0 | 5.5 |
| 117 | MP4C | Mx | .047 | 5.5 |

Member Point Loads (BLC 7 : Antenna Wo (120 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 44.361 | 2.5 |
| 2 | MP3A | Z | 25.612 | 2.5 |
| 3 | MP3A | Mx | -.022 | 2.5 |
| 4 | MP3A | X | 44.361 | 4.5 |
| 5 | MP3A | Z | 25.612 | 4.5 |
| 6 | MP3A | Mx | -.022 | 4.5 |
| 7 | MP3B | X | 81.603 | 2.5 |
| 8 | MP3B | Z | 47.114 | 2.5 |
| 9 | MP3B | Mx | 0 | 2.5 |
| 10 | MP3B | X | 81.603 | 4.5 |
| 11 | MP3B | Z | 47.114 | 4.5 |
| 12 | MP3B | Mx | 0 | 4.5 |
| 13 | MP3C | X | 44.361 | 2.5 |
| 14 | MP3C | Z | 25.612 | 2.5 |
| 15 | MP3C | Mx | .022 | 2.5 |
| 16 | MP3C | X | 44.361 | 4.5 |

Member Point Loads (BLC 7 : Antenna Wo (120 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 17 | MP3C | Z | 25.612 | 4.5 |
| 18 | MP3C | Mx | .022 | 4.5 |
| 19 | MP2A | X | 9.879 | 2 |
| 20 | MP2A | Z | 5.704 | 2 |
| 21 | MP2A | Mx | .005 | 2 |
| 22 | MP2B | X | 12.848 | 2 |
| 23 | MP2B | Z | 7.418 | 2 |
| 24 | MP2B | Mx | 0 | 2 |
| 25 | MP2C | X | 9.879 | 2 |
| 26 | MP2C | Z | 5.704 | 2 |
| 27 | MP2C | Mx | -.005 | 2 |
| 28 | MP2A | X | 48.788 | 3.5 |
| 29 | MP2A | Z | 28.168 | 3.5 |
| 30 | MP2A | Mx | .024 | 3.5 |
| 31 | MP2B | X | 64.935 | 3.5 |
| 32 | MP2B | Z | 37.49 | 3.5 |
| 33 | MP2B | Mx | 0 | 3.5 |
| 34 | MP2C | X | 48.788 | 3.5 |
| 35 | MP2C | Z | 28.168 | 3.5 |
| 36 | MP2C | Mx | -.024 | 3.5 |
| 37 | MP3A | X | 42.603 | 3.5 |
| 38 | MP3A | Z | 24.597 | 3.5 |
| 39 | MP3A | Mx | .021 | 3.5 |
| 40 | MP3B | X | 64.935 | 3.5 |
| 41 | MP3B | Z | 37.49 | 3.5 |
| 42 | MP3B | Mx | 0 | 3.5 |
| 43 | MP3C | X | 42.603 | 3.5 |
| 44 | MP3C | Z | 24.597 | 3.5 |
| 45 | MP3C | Mx | -.021 | 3.5 |
| 46 | MP2A | X | 117.456 | 1.5 |
| 47 | MP2A | Z | 67.813 | 1.5 |
| 48 | MP2A | Mx | -.019 | 1.5 |
| 49 | MP2A | X | 117.456 | 5.5 |
| 50 | MP2A | Z | 67.813 | 5.5 |
| 51 | MP2A | Mx | -.019 | 5.5 |
| 52 | MP2B | X | 158.171 | 1.5 |
| 53 | MP2B | Z | 91.32 | 1.5 |
| 54 | MP2B | Mx | .107 | 1.5 |
| 55 | MP2B | X | 158.171 | 5.5 |
| 56 | MP2B | Z | 91.32 | 5.5 |
| 57 | MP2B | Mx | .107 | 5.5 |
| 58 | MP2C | X | 158.171 | 1.5 |
| 59 | MP2C | Z | 91.32 | 1.5 |
| 60 | MP2C | Mx | -.107 | 1.5 |
| 61 | MP2C | X | 158.171 | 5.5 |
| 62 | MP2C | Z | 91.32 | 5.5 |
| 63 | MP2C | Mx | -.107 | 5.5 |
| 64 | MP2A | X | 117.456 | 1.5 |
| 65 | MP2A | Z | 67.813 | 1.5 |
| 66 | MP2A | Mx | -.098 | 1.5 |
| 67 | MP2A | X | 117.456 | 5.5 |
| 68 | MP2A | Z | 67.813 | 5.5 |
| 69 | MP2A | Mx | -.098 | 5.5 |
| 70 | MP2B | X | 158.171 | 1.5 |
| 71 | MP2B | Z | 91.32 | 1.5 |
| 72 | MP2B | Mx | -.107 | 1.5 |
| 73 | MP2B | X | 158.171 | 5.5 |

Member Point Loads (BLC 7 : Antenna Wo (120 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 74 | MP2B | Z | 91.32 | 5.5 |
| 75 | MP2B | Mx | -.107 | 5.5 |
| 76 | MP2C | X | 117.456 | 1.5 |
| 77 | MP2C | Z | 67.813 | 1.5 |
| 78 | MP2C | Mx | .019 | 1.5 |
| 79 | MP2C | X | 117.456 | 5.5 |
| 80 | MP2C | Z | 67.813 | 5.5 |
| 81 | MP2C | Mx | .019 | 5.5 |
| 82 | MP1A | X | 153.328 | 1.5 |
| 83 | MP1A | Z | 88.524 | 1.5 |
| 84 | MP1A | Mx | -.077 | 1.5 |
| 85 | MP1A | X | 153.328 | 5.5 |
| 86 | MP1A | Z | 88.524 | 5.5 |
| 87 | MP1A | Mx | -.077 | 5.5 |
| 88 | MP1B | X | 166.678 | 1.5 |
| 89 | MP1B | Z | 96.232 | 1.5 |
| 90 | MP1B | Mx | 0 | 1.5 |
| 91 | MP1B | X | 166.678 | 5.5 |
| 92 | MP1B | Z | 96.232 | 5.5 |
| 93 | MP1B | Mx | 0 | 5.5 |
| 94 | MP1C | X | 153.328 | 1.5 |
| 95 | MP1C | Z | 88.524 | 1.5 |
| 96 | MP1C | Mx | .077 | 1.5 |
| 97 | MP1C | X | 153.328 | 5.5 |
| 98 | MP1C | Z | 88.524 | 5.5 |
| 99 | MP1C | Mx | .077 | 5.5 |
| 100 | MP4A | X | 153.328 | 1.5 |
| 101 | MP4A | Z | 88.524 | 1.5 |
| 102 | MP4A | Mx | -.077 | 1.5 |
| 103 | MP4A | X | 153.328 | 5.5 |
| 104 | MP4A | Z | 88.524 | 5.5 |
| 105 | MP4A | Mx | -.077 | 5.5 |
| 106 | MP4B | X | 166.678 | 1.5 |
| 107 | MP4B | Z | 96.232 | 1.5 |
| 108 | MP4B | Mx | 0 | 1.5 |
| 109 | MP4B | X | 166.678 | 5.5 |
| 110 | MP4B | Z | 96.232 | 5.5 |
| 111 | MP4B | Mx | 0 | 5.5 |
| 112 | MP4C | X | 153.328 | 1.5 |
| 113 | MP4C | Z | 88.524 | 1.5 |
| 114 | MP4C | Mx | .077 | 1.5 |
| 115 | MP4C | X | 153.328 | 5.5 |
| 116 | MP4C | Z | 88.524 | 5.5 |
| 117 | MP4C | Mx | .077 | 5.5 |

Member Point Loads (BLC 8 : Antenna Wo (150 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|---|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 39.946 | 2.5 |
| 2 | MP3A | Z | 69.189 | 2.5 |
| 3 | MP3A | Mx | -.02 | 2.5 |
| 4 | MP3A | X | 39.946 | 4.5 |
| 5 | MP3A | Z | 69.189 | 4.5 |
| 6 | MP3A | Mx | -.02 | 4.5 |
| 7 | MP3B | X | 39.946 | 2.5 |
| 8 | MP3B | Z | 69.189 | 2.5 |
| 9 | MP3B | Mx | -.02 | 2.5 |

Member Point Loads (BLC 8 : Antenna Wo (150 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 10 | MP3B | X | 39.946 | 4.5 |
| 11 | MP3B | Z | 69.189 | 4.5 |
| 12 | MP3B | Mx | -.02 | 4.5 |
| 13 | MP3C | X | 18.445 | 2.5 |
| 14 | MP3C | Z | 31.947 | 2.5 |
| 15 | MP3C | Mx | .018 | 2.5 |
| 16 | MP3C | X | 18.445 | 4.5 |
| 17 | MP3C | Z | 31.947 | 4.5 |
| 18 | MP3C | Mx | .018 | 4.5 |
| 19 | MP2A | X | 6.846 | 2 |
| 20 | MP2A | Z | 11.858 | 2 |
| 21 | MP2A | Mx | .003 | 2 |
| 22 | MP2B | X | 6.846 | 2 |
| 23 | MP2B | Z | 11.858 | 2 |
| 24 | MP2B | Mx | .003 | 2 |
| 25 | MP2C | X | 5.132 | 2 |
| 26 | MP2C | Z | 8.89 | 2 |
| 27 | MP2C | Mx | -.005 | 2 |
| 28 | MP2A | X | 34.383 | 3.5 |
| 29 | MP2A | Z | 59.553 | 3.5 |
| 30 | MP2A | Mx | .017 | 3.5 |
| 31 | MP2B | X | 34.383 | 3.5 |
| 32 | MP2B | Z | 59.553 | 3.5 |
| 33 | MP2B | Mx | .017 | 3.5 |
| 34 | MP2C | X | 25.06 | 3.5 |
| 35 | MP2C | Z | 43.406 | 3.5 |
| 36 | MP2C | Mx | -.025 | 3.5 |
| 37 | MP3A | X | 33.192 | 3.5 |
| 38 | MP3A | Z | 57.491 | 3.5 |
| 39 | MP3A | Mx | .017 | 3.5 |
| 40 | MP3B | X | 33.192 | 3.5 |
| 41 | MP3B | Z | 57.491 | 3.5 |
| 42 | MP3B | Mx | .017 | 3.5 |
| 43 | MP3C | X | 20.299 | 3.5 |
| 44 | MP3C | Z | 35.159 | 3.5 |
| 45 | MP3C | Mx | -.02 | 3.5 |
| 46 | MP2A | X | 83.484 | 1.5 |
| 47 | MP2A | Z | 144.599 | 1.5 |
| 48 | MP2A | Mx | .043 | 1.5 |
| 49 | MP2A | X | 83.484 | 5.5 |
| 50 | MP2A | Z | 144.599 | 5.5 |
| 51 | MP2A | Mx | .043 | 5.5 |
| 52 | MP2B | X | 83.484 | 1.5 |
| 53 | MP2B | Z | 144.599 | 1.5 |
| 54 | MP2B | Mx | .126 | 1.5 |
| 55 | MP2B | X | 83.484 | 5.5 |
| 56 | MP2B | Z | 144.599 | 5.5 |
| 57 | MP2B | Mx | .126 | 5.5 |
| 58 | MP2C | X | 83.484 | 1.5 |
| 59 | MP2C | Z | 144.599 | 1.5 |
| 60 | MP2C | Mx | -.126 | 1.5 |
| 61 | MP2C | X | 83.484 | 5.5 |
| 62 | MP2C | Z | 144.599 | 5.5 |
| 63 | MP2C | Mx | -.126 | 5.5 |
| 64 | MP2A | X | 83.484 | 1.5 |
| 65 | MP2A | Z | 144.599 | 1.5 |
| 66 | MP2A | Mx | -.126 | 1.5 |

Member Point Loads (BLC 8 : Antenna Wo (150 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 67 | MP2A | X | 83.484 | 5.5 |
| 68 | MP2A | Z | 144.599 | 5.5 |
| 69 | MP2A | Mx | -.126 | 5.5 |
| 70 | MP2B | X | 83.484 | 1.5 |
| 71 | MP2B | Z | 144.599 | 1.5 |
| 72 | MP2B | Mx | -.043 | 1.5 |
| 73 | MP2B | X | 83.484 | 5.5 |
| 74 | MP2B | Z | 144.599 | 5.5 |
| 75 | MP2B | Mx | -.043 | 5.5 |
| 76 | MP2C | X | 59.978 | 1.5 |
| 77 | MP2C | Z | 103.885 | 1.5 |
| 78 | MP2C | Mx | .06 | 1.5 |
| 79 | MP2C | X | 59.978 | 5.5 |
| 80 | MP2C | Z | 103.885 | 5.5 |
| 81 | MP2C | Mx | .06 | 5.5 |
| 82 | MP1A | X | 93.663 | 1.5 |
| 83 | MP1A | Z | 162.228 | 1.5 |
| 84 | MP1A | Mx | -.047 | 1.5 |
| 85 | MP1A | X | 93.663 | 5.5 |
| 86 | MP1A | Z | 162.228 | 5.5 |
| 87 | MP1A | Mx | -.047 | 5.5 |
| 88 | MP1B | X | 93.663 | 1.5 |
| 89 | MP1B | Z | 162.228 | 1.5 |
| 90 | MP1B | Mx | -.047 | 1.5 |
| 91 | MP1B | X | 93.663 | 5.5 |
| 92 | MP1B | Z | 162.228 | 5.5 |
| 93 | MP1B | Mx | -.047 | 5.5 |
| 94 | MP1C | X | 85.955 | 1.5 |
| 95 | MP1C | Z | 148.878 | 1.5 |
| 96 | MP1C | Mx | .086 | 1.5 |
| 97 | MP1C | X | 85.955 | 5.5 |
| 98 | MP1C | Z | 148.878 | 5.5 |
| 99 | MP1C | Mx | .086 | 5.5 |
| 100 | MP4A | X | 93.663 | 1.5 |
| 101 | MP4A | Z | 162.228 | 1.5 |
| 102 | MP4A | Mx | -.047 | 1.5 |
| 103 | MP4A | X | 93.663 | 5.5 |
| 104 | MP4A | Z | 162.228 | 5.5 |
| 105 | MP4A | Mx | -.047 | 5.5 |
| 106 | MP4B | X | 93.663 | 1.5 |
| 107 | MP4B | Z | 162.228 | 1.5 |
| 108 | MP4B | Mx | -.047 | 1.5 |
| 109 | MP4B | X | 93.663 | 5.5 |
| 110 | MP4B | Z | 162.228 | 5.5 |
| 111 | MP4B | Mx | -.047 | 5.5 |
| 112 | MP4C | X | 85.955 | 1.5 |
| 113 | MP4C | Z | 148.878 | 1.5 |
| 114 | MP4C | Mx | .086 | 1.5 |
| 115 | MP4C | X | 85.955 | 5.5 |
| 116 | MP4C | Z | 148.878 | 5.5 |
| 117 | MP4C | Mx | .086 | 5.5 |

Member Point Loads (BLC 9 : Antenna Wo (180 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|---|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 0 | 2.5 |
| 2 | MP3A | Z | 94.227 | 2.5 |

Member Point Loads (BLC 9 : Antenna Wo (180 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 3 | MP3A | Mx | 0 | 2.5 |
| 4 | MP3A | X | 0 | 4.5 |
| 5 | MP3A | Z | 94.227 | 4.5 |
| 6 | MP3A | Mx | 0 | 4.5 |
| 7 | MP3B | X | 0 | 2.5 |
| 8 | MP3B | Z | 51.224 | 2.5 |
| 9 | MP3B | Mx | -.022 | 2.5 |
| 10 | MP3B | X | 0 | 4.5 |
| 11 | MP3B | Z | 51.224 | 4.5 |
| 12 | MP3B | Mx | -.022 | 4.5 |
| 13 | MP3C | X | 0 | 2.5 |
| 14 | MP3C | Z | 51.224 | 2.5 |
| 15 | MP3C | Mx | .022 | 2.5 |
| 16 | MP3C | X | 0 | 4.5 |
| 17 | MP3C | Z | 51.224 | 4.5 |
| 18 | MP3C | Mx | .022 | 4.5 |
| 19 | MP2A | X | 0 | 2 |
| 20 | MP2A | Z | 14.836 | 2 |
| 21 | MP2A | Mx | 0 | 2 |
| 22 | MP2B | X | 0 | 2 |
| 23 | MP2B | Z | 11.407 | 2 |
| 24 | MP2B | Mx | .005 | 2 |
| 25 | MP2C | X | 0 | 2 |
| 26 | MP2C | Z | 11.407 | 2 |
| 27 | MP2C | Mx | -.005 | 2 |
| 28 | MP2A | X | 0 | 3.5 |
| 29 | MP2A | Z | 74.981 | 3.5 |
| 30 | MP2A | Mx | 0 | 3.5 |
| 31 | MP2B | X | 0 | 3.5 |
| 32 | MP2B | Z | 56.336 | 3.5 |
| 33 | MP2B | Mx | .024 | 3.5 |
| 34 | MP2C | X | 0 | 3.5 |
| 35 | MP2C | Z | 56.336 | 3.5 |
| 36 | MP2C | Mx | -.024 | 3.5 |
| 37 | MP3A | X | 0 | 3.5 |
| 38 | MP3A | Z | 74.981 | 3.5 |
| 39 | MP3A | Mx | 0 | 3.5 |
| 40 | MP3B | X | 0 | 3.5 |
| 41 | MP3B | Z | 49.194 | 3.5 |
| 42 | MP3B | Mx | .021 | 3.5 |
| 43 | MP3C | X | 0 | 3.5 |
| 44 | MP3C | Z | 49.194 | 3.5 |
| 45 | MP3C | Mx | -.021 | 3.5 |
| 46 | MP2A | X | 0 | 1.5 |
| 47 | MP2A | Z | 182.64 | 1.5 |
| 48 | MP2A | Mx | .107 | 1.5 |
| 49 | MP2A | X | 0 | 5.5 |
| 50 | MP2A | Z | 182.64 | 5.5 |
| 51 | MP2A | Mx | .107 | 5.5 |
| 52 | MP2B | X | 0 | 1.5 |
| 53 | MP2B | Z | 135.627 | 1.5 |
| 54 | MP2B | Mx | .098 | 1.5 |
| 55 | MP2B | X | 0 | 5.5 |
| 56 | MP2B | Z | 135.627 | 5.5 |
| 57 | MP2B | Mx | .098 | 5.5 |
| 58 | MP2C | X | 0 | 1.5 |
| 59 | MP2C | Z | 135.627 | 1.5 |

Member Point Loads (BLC 9 : Antenna Wo (180 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 60 | MP2C | Mx | -.098 | 1.5 |
| 61 | MP2C | X | 0 | 5.5 |
| 62 | MP2C | Z | 135.627 | 5.5 |
| 63 | MP2C | Mx | -.098 | 5.5 |
| 64 | MP2A | X | 0 | 1.5 |
| 65 | MP2A | Z | 182.64 | 1.5 |
| 66 | MP2A | Mx | -.107 | 1.5 |
| 67 | MP2A | X | 0 | 5.5 |
| 68 | MP2A | Z | 182.64 | 5.5 |
| 69 | MP2A | Mx | -.107 | 5.5 |
| 70 | MP2B | X | 0 | 1.5 |
| 71 | MP2B | Z | 135.627 | 1.5 |
| 72 | MP2B | Mx | .019 | 1.5 |
| 73 | MP2B | X | 0 | 5.5 |
| 74 | MP2B | Z | 135.627 | 5.5 |
| 75 | MP2B | Mx | .019 | 5.5 |
| 76 | MP2C | X | 0 | 1.5 |
| 77 | MP2C | Z | 135.627 | 1.5 |
| 78 | MP2C | Mx | .098 | 1.5 |
| 79 | MP2C | X | 0 | 5.5 |
| 80 | MP2C | Z | 135.627 | 5.5 |
| 81 | MP2C | Mx | .098 | 5.5 |
| 82 | MP1A | X | 0 | 1.5 |
| 83 | MP1A | Z | 192.464 | 1.5 |
| 84 | MP1A | Mx | 0 | 1.5 |
| 85 | MP1A | X | 0 | 5.5 |
| 86 | MP1A | Z | 192.464 | 5.5 |
| 87 | MP1A | Mx | 0 | 5.5 |
| 88 | MP1B | X | 0 | 1.5 |
| 89 | MP1B | Z | 177.048 | 1.5 |
| 90 | MP1B | Mx | -.077 | 1.5 |
| 91 | MP1B | X | 0 | 5.5 |
| 92 | MP1B | Z | 177.048 | 5.5 |
| 93 | MP1B | Mx | -.077 | 5.5 |
| 94 | MP1C | X | 0 | 1.5 |
| 95 | MP1C | Z | 177.048 | 1.5 |
| 96 | MP1C | Mx | .077 | 1.5 |
| 97 | MP1C | X | 0 | 5.5 |
| 98 | MP1C | Z | 177.048 | 5.5 |
| 99 | MP1C | Mx | .077 | 5.5 |
| 100 | MP4A | X | 0 | 1.5 |
| 101 | MP4A | Z | 192.464 | 1.5 |
| 102 | MP4A | Mx | 0 | 1.5 |
| 103 | MP4A | X | 0 | 5.5 |
| 104 | MP4A | Z | 192.464 | 5.5 |
| 105 | MP4A | Mx | 0 | 5.5 |
| 106 | MP4B | X | 0 | 1.5 |
| 107 | MP4B | Z | 177.048 | 1.5 |
| 108 | MP4B | Mx | -.077 | 1.5 |
| 109 | MP4B | X | 0 | 5.5 |
| 110 | MP4B | Z | 177.048 | 5.5 |
| 111 | MP4B | Mx | -.077 | 5.5 |
| 112 | MP4C | X | 0 | 1.5 |
| 113 | MP4C | Z | 177.048 | 1.5 |
| 114 | MP4C | Mx | .077 | 1.5 |
| 115 | MP4C | X | 0 | 5.5 |
| 116 | MP4C | Z | 177.048 | 5.5 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Point Loads (BLC 9 : Antenna Wo (180 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 117 | MP4C | Mx | .077 | 5.5 |

Member Point Loads (BLC 10 : Antenna Wo (210 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | -39.946 | 2.5 |
| 2 | MP3A | Z | 69.189 | 2.5 |
| 3 | MP3A | Mx | .02 | 2.5 |
| 4 | MP3A | X | -39.946 | 4.5 |
| 5 | MP3A | Z | 69.189 | 4.5 |
| 6 | MP3A | Mx | .02 | 4.5 |
| 7 | MP3B | X | -18.445 | 2.5 |
| 8 | MP3B | Z | 31.947 | 2.5 |
| 9 | MP3B | Mx | -.018 | 2.5 |
| 10 | MP3B | X | -18.445 | 4.5 |
| 11 | MP3B | Z | 31.947 | 4.5 |
| 12 | MP3B | Mx | -.018 | 4.5 |
| 13 | MP3C | X | -39.946 | 2.5 |
| 14 | MP3C | Z | 69.189 | 2.5 |
| 15 | MP3C | Mx | .02 | 2.5 |
| 16 | MP3C | X | -39.946 | 4.5 |
| 17 | MP3C | Z | 69.189 | 4.5 |
| 18 | MP3C | Mx | .02 | 4.5 |
| 19 | MP2A | X | -6.846 | 2 |
| 20 | MP2A | Z | 11.858 | 2 |
| 21 | MP2A | Mx | -.003 | 2 |
| 22 | MP2B | X | -5.132 | 2 |
| 23 | MP2B | Z | 8.89 | 2 |
| 24 | MP2B | Mx | .005 | 2 |
| 25 | MP2C | X | -6.846 | 2 |
| 26 | MP2C | Z | 11.858 | 2 |
| 27 | MP2C | Mx | -.003 | 2 |
| 28 | MP2A | X | -34.383 | 3.5 |
| 29 | MP2A | Z | 59.553 | 3.5 |
| 30 | MP2A | Mx | -.017 | 3.5 |
| 31 | MP2B | X | -25.06 | 3.5 |
| 32 | MP2B | Z | 43.406 | 3.5 |
| 33 | MP2B | Mx | .025 | 3.5 |
| 34 | MP2C | X | -34.383 | 3.5 |
| 35 | MP2C | Z | 59.553 | 3.5 |
| 36 | MP2C | Mx | -.017 | 3.5 |
| 37 | MP3A | X | -33.192 | 3.5 |
| 38 | MP3A | Z | 57.491 | 3.5 |
| 39 | MP3A | Mx | -.017 | 3.5 |
| 40 | MP3B | X | -20.299 | 3.5 |
| 41 | MP3B | Z | 35.159 | 3.5 |
| 42 | MP3B | Mx | .02 | 3.5 |
| 43 | MP3C | X | -33.192 | 3.5 |
| 44 | MP3C | Z | 57.491 | 3.5 |
| 45 | MP3C | Mx | -.017 | 3.5 |
| 46 | MP2A | X | -83.484 | 1.5 |
| 47 | MP2A | Z | 144.599 | 1.5 |
| 48 | MP2A | Mx | .126 | 1.5 |
| 49 | MP2A | X | -83.484 | 5.5 |
| 50 | MP2A | Z | 144.599 | 5.5 |
| 51 | MP2A | Mx | .126 | 5.5 |
| 52 | MP2B | X | -59.978 | 1.5 |

Member Point Loads (BLC 10 : Antenna Wo (210 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 53 | MP2B | Z | 103.885 | 1.5 |
| 54 | MP2B | Mx | .06 | 1.5 |
| 55 | MP2B | X | -59.978 | 5.5 |
| 56 | MP2B | Z | 103.885 | 5.5 |
| 57 | MP2B | Mx | .06 | 5.5 |
| 58 | MP2C | X | -59.978 | 1.5 |
| 59 | MP2C | Z | 103.885 | 1.5 |
| 60 | MP2C | Mx | -.06 | 1.5 |
| 61 | MP2C | X | -59.978 | 5.5 |
| 62 | MP2C | Z | 103.885 | 5.5 |
| 63 | MP2C | Mx | -.06 | 5.5 |
| 64 | MP2A | X | -83.484 | 1.5 |
| 65 | MP2A | Z | 144.599 | 1.5 |
| 66 | MP2A | Mx | -.043 | 1.5 |
| 67 | MP2A | X | -83.484 | 5.5 |
| 68 | MP2A | Z | 144.599 | 5.5 |
| 69 | MP2A | Mx | -.043 | 5.5 |
| 70 | MP2B | X | -59.978 | 1.5 |
| 71 | MP2B | Z | 103.885 | 1.5 |
| 72 | MP2B | Mx | .06 | 1.5 |
| 73 | MP2B | X | -59.978 | 5.5 |
| 74 | MP2B | Z | 103.885 | 5.5 |
| 75 | MP2B | Mx | .06 | 5.5 |
| 76 | MP2C | X | -83.484 | 1.5 |
| 77 | MP2C | Z | 144.599 | 1.5 |
| 78 | MP2C | Mx | .126 | 1.5 |
| 79 | MP2C | X | -83.484 | 5.5 |
| 80 | MP2C | Z | 144.599 | 5.5 |
| 81 | MP2C | Mx | .126 | 5.5 |
| 82 | MP1A | X | -93.663 | 1.5 |
| 83 | MP1A | Z | 162.228 | 1.5 |
| 84 | MP1A | Mx | .047 | 1.5 |
| 85 | MP1A | X | -93.663 | 5.5 |
| 86 | MP1A | Z | 162.228 | 5.5 |
| 87 | MP1A | Mx | .047 | 5.5 |
| 88 | MP1B | X | -85.955 | 1.5 |
| 89 | MP1B | Z | 148.878 | 1.5 |
| 90 | MP1B | Mx | -.086 | 1.5 |
| 91 | MP1B | X | -85.955 | 5.5 |
| 92 | MP1B | Z | 148.878 | 5.5 |
| 93 | MP1B | Mx | -.086 | 5.5 |
| 94 | MP1C | X | -93.663 | 1.5 |
| 95 | MP1C | Z | 162.228 | 1.5 |
| 96 | MP1C | Mx | .047 | 1.5 |
| 97 | MP1C | X | -93.663 | 5.5 |
| 98 | MP1C | Z | 162.228 | 5.5 |
| 99 | MP1C | Mx | .047 | 5.5 |
| 100 | MP4A | X | -93.663 | 1.5 |
| 101 | MP4A | Z | 162.228 | 1.5 |
| 102 | MP4A | Mx | .047 | 1.5 |
| 103 | MP4A | X | -93.663 | 5.5 |
| 104 | MP4A | Z | 162.228 | 5.5 |
| 105 | MP4A | Mx | .047 | 5.5 |
| 106 | MP4B | X | -85.955 | 1.5 |
| 107 | MP4B | Z | 148.878 | 1.5 |
| 108 | MP4B | Mx | -.086 | 1.5 |
| 109 | MP4B | X | -85.955 | 5.5 |

Member Point Loads (BLC 10 : Antenna Wo (210 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb,k-ft] | Location[ft,%] |
|-----|--------------|-----------|--------------------|----------------|
| 110 | MP4B | Z | 148.878 | 5.5 |
| 111 | MP4B | Mx | -.086 | 5.5 |
| 112 | MP4C | X | -93.663 | 1.5 |
| 113 | MP4C | Z | 162.228 | 1.5 |
| 114 | MP4C | Mx | .047 | 1.5 |
| 115 | MP4C | X | -93.663 | 5.5 |
| 116 | MP4C | Z | 162.228 | 5.5 |
| 117 | MP4C | Mx | .047 | 5.5 |

Member Point Loads (BLC 11 : Antenna Wo (240 Deg))

| | Member Label | Direction | Magnitude[lb,k-ft] | Location[ft,%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | -44.361 | 2.5 |
| 2 | MP3A | Z | 25.612 | 2.5 |
| 3 | MP3A | Mx | .022 | 2.5 |
| 4 | MP3A | X | -44.361 | 4.5 |
| 5 | MP3A | Z | 25.612 | 4.5 |
| 6 | MP3A | Mx | .022 | 4.5 |
| 7 | MP3B | X | -44.361 | 2.5 |
| 8 | MP3B | Z | 25.612 | 2.5 |
| 9 | MP3B | Mx | -.022 | 2.5 |
| 10 | MP3B | X | -44.361 | 4.5 |
| 11 | MP3B | Z | 25.612 | 4.5 |
| 12 | MP3B | Mx | -.022 | 4.5 |
| 13 | MP3C | X | -81.603 | 2.5 |
| 14 | MP3C | Z | 47.114 | 2.5 |
| 15 | MP3C | Mx | 0 | 2.5 |
| 16 | MP3C | X | -81.603 | 4.5 |
| 17 | MP3C | Z | 47.114 | 4.5 |
| 18 | MP3C | Mx | 0 | 4.5 |
| 19 | MP2A | X | -9.879 | 2 |
| 20 | MP2A | Z | 5.704 | 2 |
| 21 | MP2A | Mx | -.005 | 2 |
| 22 | MP2B | X | -9.879 | 2 |
| 23 | MP2B | Z | 5.704 | 2 |
| 24 | MP2B | Mx | .005 | 2 |
| 25 | MP2C | X | -12.848 | 2 |
| 26 | MP2C | Z | 7.418 | 2 |
| 27 | MP2C | Mx | 0 | 2 |
| 28 | MP2A | X | -48.788 | 3.5 |
| 29 | MP2A | Z | 28.168 | 3.5 |
| 30 | MP2A | Mx | -.024 | 3.5 |
| 31 | MP2B | X | -48.788 | 3.5 |
| 32 | MP2B | Z | 28.168 | 3.5 |
| 33 | MP2B | Mx | .024 | 3.5 |
| 34 | MP2C | X | -64.935 | 3.5 |
| 35 | MP2C | Z | 37.49 | 3.5 |
| 36 | MP2C | Mx | 0 | 3.5 |
| 37 | MP3A | X | -42.603 | 3.5 |
| 38 | MP3A | Z | 24.597 | 3.5 |
| 39 | MP3A | Mx | -.021 | 3.5 |
| 40 | MP3B | X | -42.603 | 3.5 |
| 41 | MP3B | Z | 24.597 | 3.5 |
| 42 | MP3B | Mx | .021 | 3.5 |
| 43 | MP3C | X | -64.935 | 3.5 |
| 44 | MP3C | Z | 37.49 | 3.5 |
| 45 | MP3C | Mx | 0 | 3.5 |

Member Point Loads (BLC 11 : Antenna Wo (240 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 46 | MP2A | X | -117.456 | 1.5 |
| 47 | MP2A | Z | 67.813 | 1.5 |
| 48 | MP2A | Mx | .098 | 1.5 |
| 49 | MP2A | X | -117.456 | 5.5 |
| 50 | MP2A | Z | 67.813 | 5.5 |
| 51 | MP2A | Mx | .098 | 5.5 |
| 52 | MP2B | X | -117.456 | 1.5 |
| 53 | MP2B | Z | 67.813 | 1.5 |
| 54 | MP2B | Mx | .019 | 1.5 |
| 55 | MP2B | X | -117.456 | 5.5 |
| 56 | MP2B | Z | 67.813 | 5.5 |
| 57 | MP2B | Mx | .019 | 5.5 |
| 58 | MP2C | X | -117.456 | 1.5 |
| 59 | MP2C | Z | 67.813 | 1.5 |
| 60 | MP2C | Mx | -.019 | 1.5 |
| 61 | MP2C | X | -117.456 | 5.5 |
| 62 | MP2C | Z | 67.813 | 5.5 |
| 63 | MP2C | Mx | -.019 | 5.5 |
| 64 | MP2A | X | -117.456 | 1.5 |
| 65 | MP2A | Z | 67.813 | 1.5 |
| 66 | MP2A | Mx | .019 | 1.5 |
| 67 | MP2A | X | -117.456 | 5.5 |
| 68 | MP2A | Z | 67.813 | 5.5 |
| 69 | MP2A | Mx | .019 | 5.5 |
| 70 | MP2B | X | -117.456 | 1.5 |
| 71 | MP2B | Z | 67.813 | 1.5 |
| 72 | MP2B | Mx | .098 | 1.5 |
| 73 | MP2B | X | -117.456 | 5.5 |
| 74 | MP2B | Z | 67.813 | 5.5 |
| 75 | MP2B | Mx | .098 | 5.5 |
| 76 | MP2C | X | -158.171 | 1.5 |
| 77 | MP2C | Z | 91.32 | 1.5 |
| 78 | MP2C | Mx | .107 | 1.5 |
| 79 | MP2C | X | -158.171 | 5.5 |
| 80 | MP2C | Z | 91.32 | 5.5 |
| 81 | MP2C | Mx | .107 | 5.5 |
| 82 | MP1A | X | -153.328 | 1.5 |
| 83 | MP1A | Z | 88.524 | 1.5 |
| 84 | MP1A | Mx | .077 | 1.5 |
| 85 | MP1A | X | -153.328 | 5.5 |
| 86 | MP1A | Z | 88.524 | 5.5 |
| 87 | MP1A | Mx | .077 | 5.5 |
| 88 | MP1B | X | -153.328 | 1.5 |
| 89 | MP1B | Z | 88.524 | 1.5 |
| 90 | MP1B | Mx | -.077 | 1.5 |
| 91 | MP1B | X | -153.328 | 5.5 |
| 92 | MP1B | Z | 88.524 | 5.5 |
| 93 | MP1B | Mx | -.077 | 5.5 |
| 94 | MP1C | X | -166.678 | 1.5 |
| 95 | MP1C | Z | 96.232 | 1.5 |
| 96 | MP1C | Mx | 0 | 1.5 |
| 97 | MP1C | X | -166.678 | 5.5 |
| 98 | MP1C | Z | 96.232 | 5.5 |
| 99 | MP1C | Mx | 0 | 5.5 |
| 100 | MP4A | X | -153.328 | 1.5 |
| 101 | MP4A | Z | 88.524 | 1.5 |
| 102 | MP4A | Mx | .077 | 1.5 |

Member Point Loads (BLC 11 : Antenna Wo (240 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 103 | MP4A | X | -153.328 | 5.5 |
| 104 | MP4A | Z | 88.524 | 5.5 |
| 105 | MP4A | Mx | .077 | 5.5 |
| 106 | MP4B | X | -153.328 | 1.5 |
| 107 | MP4B | Z | 88.524 | 1.5 |
| 108 | MP4B | Mx | -.077 | 1.5 |
| 109 | MP4B | X | -153.328 | 5.5 |
| 110 | MP4B | Z | 88.524 | 5.5 |
| 111 | MP4B | Mx | -.077 | 5.5 |
| 112 | MP4C | X | -166.678 | 1.5 |
| 113 | MP4C | Z | 96.232 | 1.5 |
| 114 | MP4C | Mx | 0 | 1.5 |
| 115 | MP4C | X | -166.678 | 5.5 |
| 116 | MP4C | Z | 96.232 | 5.5 |
| 117 | MP4C | Mx | 0 | 5.5 |

Member Point Loads (BLC 12 : Antenna Wo (270 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | -36.89 | 2.5 |
| 2 | MP3A | Z | 0 | 2.5 |
| 3 | MP3A | Mx | .018 | 2.5 |
| 4 | MP3A | X | -36.89 | 4.5 |
| 5 | MP3A | Z | 0 | 4.5 |
| 6 | MP3A | Mx | .018 | 4.5 |
| 7 | MP3B | X | -79.893 | 2.5 |
| 8 | MP3B | Z | 0 | 2.5 |
| 9 | MP3B | Mx | -.02 | 2.5 |
| 10 | MP3B | X | -79.893 | 4.5 |
| 11 | MP3B | Z | 0 | 4.5 |
| 12 | MP3B | Mx | -.02 | 4.5 |
| 13 | MP3C | X | -79.893 | 2.5 |
| 14 | MP3C | Z | 0 | 2.5 |
| 15 | MP3C | Mx | -.02 | 2.5 |
| 16 | MP3C | X | -79.893 | 4.5 |
| 17 | MP3C | Z | 0 | 4.5 |
| 18 | MP3C | Mx | -.02 | 4.5 |
| 19 | MP2A | X | -10.265 | 2 |
| 20 | MP2A | Z | 0 | 2 |
| 21 | MP2A | Mx | -.005 | 2 |
| 22 | MP2B | X | -13.693 | 2 |
| 23 | MP2B | Z | 0 | 2 |
| 24 | MP2B | Mx | .003 | 2 |
| 25 | MP2C | X | -13.693 | 2 |
| 26 | MP2C | Z | 0 | 2 |
| 27 | MP2C | Mx | .003 | 2 |
| 28 | MP2A | X | -50.121 | 3.5 |
| 29 | MP2A | Z | 0 | 3.5 |
| 30 | MP2A | Mx | -.025 | 3.5 |
| 31 | MP2B | X | -68.766 | 3.5 |
| 32 | MP2B | Z | 0 | 3.5 |
| 33 | MP2B | Mx | .017 | 3.5 |
| 34 | MP2C | X | -68.766 | 3.5 |
| 35 | MP2C | Z | 0 | 3.5 |
| 36 | MP2C | Mx | .017 | 3.5 |
| 37 | MP3A | X | -40.598 | 3.5 |
| 38 | MP3A | Z | 0 | 3.5 |

Member Point Loads (BLC 12 : Antenna Wo (270 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 39 | MP3A | Mx | -.02 | 3.5 |
| 40 | MP3B | X | -66.385 | 3.5 |
| 41 | MP3B | Z | 0 | 3.5 |
| 42 | MP3B | Mx | .017 | 3.5 |
| 43 | MP3C | X | -66.385 | 3.5 |
| 44 | MP3C | Z | 0 | 3.5 |
| 45 | MP3C | Mx | .017 | 3.5 |
| 46 | MP2A | X | -119.956 | 1.5 |
| 47 | MP2A | Z | 0 | 1.5 |
| 48 | MP2A | Mx | .06 | 1.5 |
| 49 | MP2A | X | -119.956 | 5.5 |
| 50 | MP2A | Z | 0 | 5.5 |
| 51 | MP2A | Mx | .06 | 5.5 |
| 52 | MP2B | X | -166.969 | 1.5 |
| 53 | MP2B | Z | 0 | 1.5 |
| 54 | MP2B | Mx | -.043 | 1.5 |
| 55 | MP2B | X | -166.969 | 5.5 |
| 56 | MP2B | Z | 0 | 5.5 |
| 57 | MP2B | Mx | -.043 | 5.5 |
| 58 | MP2C | X | -166.969 | 1.5 |
| 59 | MP2C | Z | 0 | 1.5 |
| 60 | MP2C | Mx | .043 | 1.5 |
| 61 | MP2C | X | -166.969 | 5.5 |
| 62 | MP2C | Z | 0 | 5.5 |
| 63 | MP2C | Mx | .043 | 5.5 |
| 64 | MP2A | X | -119.956 | 1.5 |
| 65 | MP2A | Z | 0 | 1.5 |
| 66 | MP2A | Mx | .06 | 1.5 |
| 67 | MP2A | X | -119.956 | 5.5 |
| 68 | MP2A | Z | 0 | 5.5 |
| 69 | MP2A | Mx | .06 | 5.5 |
| 70 | MP2B | X | -166.969 | 1.5 |
| 71 | MP2B | Z | 0 | 1.5 |
| 72 | MP2B | Mx | .126 | 1.5 |
| 73 | MP2B | X | -166.969 | 5.5 |
| 74 | MP2B | Z | 0 | 5.5 |
| 75 | MP2B | Mx | .126 | 5.5 |
| 76 | MP2C | X | -166.969 | 1.5 |
| 77 | MP2C | Z | 0 | 1.5 |
| 78 | MP2C | Mx | .043 | 1.5 |
| 79 | MP2C | X | -166.969 | 5.5 |
| 80 | MP2C | Z | 0 | 5.5 |
| 81 | MP2C | Mx | .043 | 5.5 |
| 82 | MP1A | X | -171.909 | 1.5 |
| 83 | MP1A | Z | 0 | 1.5 |
| 84 | MP1A | Mx | .086 | 1.5 |
| 85 | MP1A | X | -171.909 | 5.5 |
| 86 | MP1A | Z | 0 | 5.5 |
| 87 | MP1A | Mx | .086 | 5.5 |
| 88 | MP1B | X | -187.325 | 1.5 |
| 89 | MP1B | Z | 0 | 1.5 |
| 90 | MP1B | Mx | -.047 | 1.5 |
| 91 | MP1B | X | -187.325 | 5.5 |
| 92 | MP1B | Z | 0 | 5.5 |
| 93 | MP1B | Mx | -.047 | 5.5 |
| 94 | MP1C | X | -187.325 | 1.5 |
| 95 | MP1C | Z | 0 | 1.5 |

Member Point Loads (BLC 12 : Antenna Wo (270 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft. %] |
|-----|--------------|-----------|--------------------|-----------------|
| 96 | MP1C | Mx | -.047 | 1.5 |
| 97 | MP1C | X | -187.325 | 5.5 |
| 98 | MP1C | Z | 0 | 5.5 |
| 99 | MP1C | Mx | -.047 | 5.5 |
| 100 | MP4A | X | -171.909 | 1.5 |
| 101 | MP4A | Z | 0 | 1.5 |
| 102 | MP4A | Mx | .086 | 1.5 |
| 103 | MP4A | X | -171.909 | 5.5 |
| 104 | MP4A | Z | 0 | 5.5 |
| 105 | MP4A | Mx | .086 | 5.5 |
| 106 | MP4B | X | -187.325 | 1.5 |
| 107 | MP4B | Z | 0 | 1.5 |
| 108 | MP4B | Mx | -.047 | 1.5 |
| 109 | MP4B | X | -187.325 | 5.5 |
| 110 | MP4B | Z | 0 | 5.5 |
| 111 | MP4B | Mx | -.047 | 5.5 |
| 112 | MP4C | X | -187.325 | 1.5 |
| 113 | MP4C | Z | 0 | 1.5 |
| 114 | MP4C | Mx | -.047 | 1.5 |
| 115 | MP4C | X | -187.325 | 5.5 |
| 116 | MP4C | Z | 0 | 5.5 |
| 117 | MP4C | Mx | -.047 | 5.5 |

Member Point Loads (BLC 13 : Antenna Wo (300 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft. %] |
|----|--------------|-----------|--------------------|-----------------|
| 1 | MP3A | X | -44.361 | 2.5 |
| 2 | MP3A | Z | -25.612 | 2.5 |
| 3 | MP3A | Mx | .022 | 2.5 |
| 4 | MP3A | X | -44.361 | 4.5 |
| 5 | MP3A | Z | -25.612 | 4.5 |
| 6 | MP3A | Mx | .022 | 4.5 |
| 7 | MP3B | X | -81.603 | 2.5 |
| 8 | MP3B | Z | -47.114 | 2.5 |
| 9 | MP3B | Mx | 0 | 2.5 |
| 10 | MP3B | X | -81.603 | 4.5 |
| 11 | MP3B | Z | -47.114 | 4.5 |
| 12 | MP3B | Mx | 0 | 4.5 |
| 13 | MP3C | X | -44.361 | 2.5 |
| 14 | MP3C | Z | -25.612 | 2.5 |
| 15 | MP3C | Mx | -.022 | 2.5 |
| 16 | MP3C | X | -44.361 | 4.5 |
| 17 | MP3C | Z | -25.612 | 4.5 |
| 18 | MP3C | Mx | -.022 | 4.5 |
| 19 | MP2A | X | -9.879 | 2 |
| 20 | MP2A | Z | -5.704 | 2 |
| 21 | MP2A | Mx | -.005 | 2 |
| 22 | MP2B | X | -12.848 | 2 |
| 23 | MP2B | Z | -7.418 | 2 |
| 24 | MP2B | Mx | 0 | 2 |
| 25 | MP2C | X | -9.879 | 2 |
| 26 | MP2C | Z | -5.704 | 2 |
| 27 | MP2C | Mx | .005 | 2 |
| 28 | MP2A | X | -48.788 | 3.5 |
| 29 | MP2A | Z | -28.168 | 3.5 |
| 30 | MP2A | Mx | -.024 | 3.5 |
| 31 | MP2B | X | -64.935 | 3.5 |

Member Point Loads (BLC 13 : Antenna Wo (300 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 32 | MP2B | Z | -37.49 | 3.5 |
| 33 | MP2B | Mx | 0 | 3.5 |
| 34 | MP2C | X | -48.788 | 3.5 |
| 35 | MP2C | Z | -28.168 | 3.5 |
| 36 | MP2C | Mx | .024 | 3.5 |
| 37 | MP3A | X | -42.603 | 3.5 |
| 38 | MP3A | Z | -24.597 | 3.5 |
| 39 | MP3A | Mx | -.021 | 3.5 |
| 40 | MP3B | X | -64.935 | 3.5 |
| 41 | MP3B | Z | -37.49 | 3.5 |
| 42 | MP3B | Mx | 0 | 3.5 |
| 43 | MP3C | X | -42.603 | 3.5 |
| 44 | MP3C | Z | -24.597 | 3.5 |
| 45 | MP3C | Mx | .021 | 3.5 |
| 46 | MP2A | X | -117.456 | 1.5 |
| 47 | MP2A | Z | -67.813 | 1.5 |
| 48 | MP2A | Mx | .019 | 1.5 |
| 49 | MP2A | X | -117.456 | 5.5 |
| 50 | MP2A | Z | -67.813 | 5.5 |
| 51 | MP2A | Mx | .019 | 5.5 |
| 52 | MP2B | X | -158.171 | 1.5 |
| 53 | MP2B | Z | -91.32 | 1.5 |
| 54 | MP2B | Mx | -.107 | 1.5 |
| 55 | MP2B | X | -158.171 | 5.5 |
| 56 | MP2B | Z | -91.32 | 5.5 |
| 57 | MP2B | Mx | -.107 | 5.5 |
| 58 | MP2C | X | -158.171 | 1.5 |
| 59 | MP2C | Z | -91.32 | 1.5 |
| 60 | MP2C | Mx | .107 | 1.5 |
| 61 | MP2C | X | -158.171 | 5.5 |
| 62 | MP2C | Z | -91.32 | 5.5 |
| 63 | MP2C | Mx | .107 | 5.5 |
| 64 | MP2A | X | -117.456 | 1.5 |
| 65 | MP2A | Z | -67.813 | 1.5 |
| 66 | MP2A | Mx | .098 | 1.5 |
| 67 | MP2A | X | -117.456 | 5.5 |
| 68 | MP2A | Z | -67.813 | 5.5 |
| 69 | MP2A | Mx | .098 | 5.5 |
| 70 | MP2B | X | -158.171 | 1.5 |
| 71 | MP2B | Z | -91.32 | 1.5 |
| 72 | MP2B | Mx | .107 | 1.5 |
| 73 | MP2B | X | -158.171 | 5.5 |
| 74 | MP2B | Z | -91.32 | 5.5 |
| 75 | MP2B | Mx | .107 | 5.5 |
| 76 | MP2C | X | -117.456 | 1.5 |
| 77 | MP2C | Z | -67.813 | 1.5 |
| 78 | MP2C | Mx | -.019 | 1.5 |
| 79 | MP2C | X | -117.456 | 5.5 |
| 80 | MP2C | Z | -67.813 | 5.5 |
| 81 | MP2C | Mx | -.019 | 5.5 |
| 82 | MP1A | X | -153.328 | 1.5 |
| 83 | MP1A | Z | -88.524 | 1.5 |
| 84 | MP1A | Mx | .077 | 1.5 |
| 85 | MP1A | X | -153.328 | 5.5 |
| 86 | MP1A | Z | -88.524 | 5.5 |
| 87 | MP1A | Mx | .077 | 5.5 |
| 88 | MP1B | X | -166.678 | 1.5 |

Member Point Loads (BLC 13 : Antenna Wo (300 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft. %] |
|-----|--------------|-----------|--------------------|-----------------|
| 89 | MP1B | Z | -96.232 | 1.5 |
| 90 | MP1B | Mx | 0 | 1.5 |
| 91 | MP1B | X | -166.678 | 5.5 |
| 92 | MP1B | Z | -96.232 | 5.5 |
| 93 | MP1B | Mx | 0 | 5.5 |
| 94 | MP1C | X | -153.328 | 1.5 |
| 95 | MP1C | Z | -88.524 | 1.5 |
| 96 | MP1C | Mx | -.077 | 1.5 |
| 97 | MP1C | X | -153.328 | 5.5 |
| 98 | MP1C | Z | -88.524 | 5.5 |
| 99 | MP1C | Mx | -.077 | 5.5 |
| 100 | MP4A | X | -153.328 | 1.5 |
| 101 | MP4A | Z | -88.524 | 1.5 |
| 102 | MP4A | Mx | .077 | 1.5 |
| 103 | MP4A | X | -153.328 | 5.5 |
| 104 | MP4A | Z | -88.524 | 5.5 |
| 105 | MP4A | Mx | .077 | 5.5 |
| 106 | MP4B | X | -166.678 | 1.5 |
| 107 | MP4B | Z | -96.232 | 1.5 |
| 108 | MP4B | Mx | 0 | 1.5 |
| 109 | MP4B | X | -166.678 | 5.5 |
| 110 | MP4B | Z | -96.232 | 5.5 |
| 111 | MP4B | Mx | 0 | 5.5 |
| 112 | MP4C | X | -153.328 | 1.5 |
| 113 | MP4C | Z | -88.524 | 1.5 |
| 114 | MP4C | Mx | -.077 | 1.5 |
| 115 | MP4C | X | -153.328 | 5.5 |
| 116 | MP4C | Z | -88.524 | 5.5 |
| 117 | MP4C | Mx | -.077 | 5.5 |

Member Point Loads (BLC 14 : Antenna Wo (330 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft. %] |
|----|--------------|-----------|--------------------|-----------------|
| 1 | MP3A | X | -39.946 | 2.5 |
| 2 | MP3A | Z | -69.189 | 2.5 |
| 3 | MP3A | Mx | .02 | 2.5 |
| 4 | MP3A | X | -39.946 | 4.5 |
| 5 | MP3A | Z | -69.189 | 4.5 |
| 6 | MP3A | Mx | .02 | 4.5 |
| 7 | MP3B | X | -39.946 | 2.5 |
| 8 | MP3B | Z | -69.189 | 2.5 |
| 9 | MP3B | Mx | .02 | 2.5 |
| 10 | MP3B | X | -39.946 | 4.5 |
| 11 | MP3B | Z | -69.189 | 4.5 |
| 12 | MP3B | Mx | .02 | 4.5 |
| 13 | MP3C | X | -18.445 | 2.5 |
| 14 | MP3C | Z | -31.947 | 2.5 |
| 15 | MP3C | Mx | -.018 | 2.5 |
| 16 | MP3C | X | -18.445 | 4.5 |
| 17 | MP3C | Z | -31.947 | 4.5 |
| 18 | MP3C | Mx | -.018 | 4.5 |
| 19 | MP2A | X | -6.846 | 2 |
| 20 | MP2A | Z | -11.858 | 2 |
| 21 | MP2A | Mx | -.003 | 2 |
| 22 | MP2B | X | -6.846 | 2 |
| 23 | MP2B | Z | -11.858 | 2 |
| 24 | MP2B | Mx | -.003 | 2 |

Member Point Loads (BLC 14 : Antenna Wo (330 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 25 | MP2C | X | -5.132 | 2 |
| 26 | MP2C | Z | -8.89 | 2 |
| 27 | MP2C | Mx | .005 | 2 |
| 28 | MP2A | X | -34.383 | 3.5 |
| 29 | MP2A | Z | -59.553 | 3.5 |
| 30 | MP2A | Mx | -.017 | 3.5 |
| 31 | MP2B | X | -34.383 | 3.5 |
| 32 | MP2B | Z | -59.553 | 3.5 |
| 33 | MP2B | Mx | -.017 | 3.5 |
| 34 | MP2C | X | -25.06 | 3.5 |
| 35 | MP2C | Z | -43.406 | 3.5 |
| 36 | MP2C | Mx | .025 | 3.5 |
| 37 | MP3A | X | -33.192 | 3.5 |
| 38 | MP3A | Z | -57.491 | 3.5 |
| 39 | MP3A | Mx | -.017 | 3.5 |
| 40 | MP3B | X | -33.192 | 3.5 |
| 41 | MP3B | Z | -57.491 | 3.5 |
| 42 | MP3B | Mx | -.017 | 3.5 |
| 43 | MP3C | X | -20.299 | 3.5 |
| 44 | MP3C | Z | -35.159 | 3.5 |
| 45 | MP3C | Mx | .02 | 3.5 |
| 46 | MP2A | X | -83.484 | 1.5 |
| 47 | MP2A | Z | -144.599 | 1.5 |
| 48 | MP2A | Mx | -.043 | 1.5 |
| 49 | MP2A | X | -83.484 | 5.5 |
| 50 | MP2A | Z | -144.599 | 5.5 |
| 51 | MP2A | Mx | -.043 | 5.5 |
| 52 | MP2B | X | -83.484 | 1.5 |
| 53 | MP2B | Z | -144.599 | 1.5 |
| 54 | MP2B | Mx | -.126 | 1.5 |
| 55 | MP2B | X | -83.484 | 5.5 |
| 56 | MP2B | Z | -144.599 | 5.5 |
| 57 | MP2B | Mx | -.126 | 5.5 |
| 58 | MP2C | X | -83.484 | 1.5 |
| 59 | MP2C | Z | -144.599 | 1.5 |
| 60 | MP2C | Mx | .126 | 1.5 |
| 61 | MP2C | X | -83.484 | 5.5 |
| 62 | MP2C | Z | -144.599 | 5.5 |
| 63 | MP2C | Mx | .126 | 5.5 |
| 64 | MP2A | X | -83.484 | 1.5 |
| 65 | MP2A | Z | -144.599 | 1.5 |
| 66 | MP2A | Mx | .126 | 1.5 |
| 67 | MP2A | X | -83.484 | 5.5 |
| 68 | MP2A | Z | -144.599 | 5.5 |
| 69 | MP2A | Mx | .126 | 5.5 |
| 70 | MP2B | X | -83.484 | 1.5 |
| 71 | MP2B | Z | -144.599 | 1.5 |
| 72 | MP2B | Mx | .043 | 1.5 |
| 73 | MP2B | X | -83.484 | 5.5 |
| 74 | MP2B | Z | -144.599 | 5.5 |
| 75 | MP2B | Mx | .043 | 5.5 |
| 76 | MP2C | X | -59.978 | 1.5 |
| 77 | MP2C | Z | -103.885 | 1.5 |
| 78 | MP2C | Mx | -.06 | 1.5 |
| 79 | MP2C | X | -59.978 | 5.5 |
| 80 | MP2C | Z | -103.885 | 5.5 |
| 81 | MP2C | Mx | -.06 | 5.5 |

Member Point Loads (BLC 14 : Antenna Wo (330 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 82 | MP1A | X | -93.663 | 1.5 |
| 83 | MP1A | Z | -162.228 | 1.5 |
| 84 | MP1A | Mx | .047 | 1.5 |
| 85 | MP1A | X | -93.663 | 5.5 |
| 86 | MP1A | Z | -162.228 | 5.5 |
| 87 | MP1A | Mx | .047 | 5.5 |
| 88 | MP1B | X | -93.663 | 1.5 |
| 89 | MP1B | Z | -162.228 | 1.5 |
| 90 | MP1B | Mx | .047 | 1.5 |
| 91 | MP1B | X | -93.663 | 5.5 |
| 92 | MP1B | Z | -162.228 | 5.5 |
| 93 | MP1B | Mx | .047 | 5.5 |
| 94 | MP1C | X | -85.955 | 1.5 |
| 95 | MP1C | Z | -148.878 | 1.5 |
| 96 | MP1C | Mx | -.086 | 1.5 |
| 97 | MP1C | X | -85.955 | 5.5 |
| 98 | MP1C | Z | -148.878 | 5.5 |
| 99 | MP1C | Mx | -.086 | 5.5 |
| 100 | MP4A | X | -93.663 | 1.5 |
| 101 | MP4A | Z | -162.228 | 1.5 |
| 102 | MP4A | Mx | .047 | 1.5 |
| 103 | MP4A | X | -93.663 | 5.5 |
| 104 | MP4A | Z | -162.228 | 5.5 |
| 105 | MP4A | Mx | .047 | 5.5 |
| 106 | MP4B | X | -93.663 | 1.5 |
| 107 | MP4B | Z | -162.228 | 1.5 |
| 108 | MP4B | Mx | .047 | 1.5 |
| 109 | MP4B | X | -93.663 | 5.5 |
| 110 | MP4B | Z | -162.228 | 5.5 |
| 111 | MP4B | Mx | .047 | 5.5 |
| 112 | MP4C | X | -85.955 | 1.5 |
| 113 | MP4C | Z | -148.878 | 1.5 |
| 114 | MP4C | Mx | -.086 | 1.5 |
| 115 | MP4C | X | -85.955 | 5.5 |
| 116 | MP4C | Z | -148.878 | 5.5 |
| 117 | MP4C | Mx | -.086 | 5.5 |

Member Point Loads (BLC 15 : Antenna Wi (0 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 0 | 2.5 |
| 2 | MP3A | Z | -19.453 | 2.5 |
| 3 | MP3A | Mx | 0 | 2.5 |
| 4 | MP3A | X | 0 | 4.5 |
| 5 | MP3A | Z | -19.453 | 4.5 |
| 6 | MP3A | Mx | 0 | 4.5 |
| 7 | MP3B | X | 0 | 2.5 |
| 8 | MP3B | Z | -11.081 | 2.5 |
| 9 | MP3B | Mx | .005 | 2.5 |
| 10 | MP3B | X | 0 | 4.5 |
| 11 | MP3B | Z | -11.081 | 4.5 |
| 12 | MP3B | Mx | .005 | 4.5 |
| 13 | MP3C | X | 0 | 2.5 |
| 14 | MP3C | Z | -11.081 | 2.5 |
| 15 | MP3C | Mx | -.005 | 2.5 |
| 16 | MP3C | X | 0 | 4.5 |
| 17 | MP3C | Z | -11.081 | 4.5 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Point Loads (BLC 15 : Antenna Wi (0 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 18 | MP3C | Mx | -0.05 | 4.5 |
| 19 | MP2A | X | 0 | 2 |
| 20 | MP2A | Z | -3.985 | 2 |
| 21 | MP2A | Mx | 0 | 2 |
| 22 | MP2B | X | 0 | 2 |
| 23 | MP2B | Z | -3.24 | 2 |
| 24 | MP2B | Mx | -0.01 | 2 |
| 25 | MP2C | X | 0 | 2 |
| 26 | MP2C | Z | -3.24 | 2 |
| 27 | MP2C | Mx | .001 | 2 |
| 28 | MP2A | X | 0 | 3.5 |
| 29 | MP2A | Z | -16.401 | 3.5 |
| 30 | MP2A | Mx | 0 | 3.5 |
| 31 | MP2B | X | 0 | 3.5 |
| 32 | MP2B | Z | -12.658 | 3.5 |
| 33 | MP2B | Mx | -0.05 | 3.5 |
| 34 | MP2C | X | 0 | 3.5 |
| 35 | MP2C | Z | -12.658 | 3.5 |
| 36 | MP2C | Mx | .005 | 3.5 |
| 37 | MP3A | X | 0 | 3.5 |
| 38 | MP3A | Z | -16.401 | 3.5 |
| 39 | MP3A | Mx | 0 | 3.5 |
| 40 | MP3B | X | 0 | 3.5 |
| 41 | MP3B | Z | -11.236 | 3.5 |
| 42 | MP3B | Mx | -0.05 | 3.5 |
| 43 | MP3C | X | 0 | 3.5 |
| 44 | MP3C | Z | -11.236 | 3.5 |
| 45 | MP3C | Mx | .005 | 3.5 |
| 46 | MP2A | X | 0 | 1.5 |
| 47 | MP2A | Z | -36.57 | 1.5 |
| 48 | MP2A | Mx | -0.21 | 1.5 |
| 49 | MP2A | X | 0 | 5.5 |
| 50 | MP2A | Z | -36.57 | 5.5 |
| 51 | MP2A | Mx | -0.21 | 5.5 |
| 52 | MP2B | X | 0 | 1.5 |
| 53 | MP2B | Z | -27.856 | 1.5 |
| 54 | MP2B | Mx | -.02 | 1.5 |
| 55 | MP2B | X | 0 | 5.5 |
| 56 | MP2B | Z | -27.856 | 5.5 |
| 57 | MP2B | Mx | -.02 | 5.5 |
| 58 | MP2C | X | 0 | 1.5 |
| 59 | MP2C | Z | -27.856 | 1.5 |
| 60 | MP2C | Mx | .02 | 1.5 |
| 61 | MP2C | X | 0 | 5.5 |
| 62 | MP2C | Z | -27.856 | 5.5 |
| 63 | MP2C | Mx | .02 | 5.5 |
| 64 | MP2A | X | 0 | 1.5 |
| 65 | MP2A | Z | -36.57 | 1.5 |
| 66 | MP2A | Mx | .021 | 1.5 |
| 67 | MP2A | X | 0 | 5.5 |
| 68 | MP2A | Z | -36.57 | 5.5 |
| 69 | MP2A | Mx | .021 | 5.5 |
| 70 | MP2B | X | 0 | 1.5 |
| 71 | MP2B | Z | -27.856 | 1.5 |
| 72 | MP2B | Mx | -.004 | 1.5 |
| 73 | MP2B | X | 0 | 5.5 |
| 74 | MP2B | Z | -27.856 | 5.5 |

Member Point Loads (BLC 15 : Antenna Wi (0 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 75 | MP2B | Mx | -0.04 | 5.5 |
| 76 | MP2C | X | 0 | 1.5 |
| 77 | MP2C | Z | -27.856 | 1.5 |
| 78 | MP2C | Mx | -.02 | 1.5 |
| 79 | MP2C | X | 0 | 5.5 |
| 80 | MP2C | Z | -27.856 | 5.5 |
| 81 | MP2C | Mx | -.02 | 5.5 |
| 82 | MP1A | X | 0 | 1.5 |
| 83 | MP1A | Z | -38.369 | 1.5 |
| 84 | MP1A | Mx | 0 | 1.5 |
| 85 | MP1A | X | 0 | 5.5 |
| 86 | MP1A | Z | -38.369 | 5.5 |
| 87 | MP1A | Mx | 0 | 5.5 |
| 88 | MP1B | X | 0 | 1.5 |
| 89 | MP1B | Z | -35.482 | 1.5 |
| 90 | MP1B | Mx | .015 | 1.5 |
| 91 | MP1B | X | 0 | 5.5 |
| 92 | MP1B | Z | -35.482 | 5.5 |
| 93 | MP1B | Mx | .015 | 5.5 |
| 94 | MP1C | X | 0 | 1.5 |
| 95 | MP1C | Z | -35.482 | 1.5 |
| 96 | MP1C | Mx | -.015 | 1.5 |
| 97 | MP1C | X | 0 | 5.5 |
| 98 | MP1C | Z | -35.482 | 5.5 |
| 99 | MP1C | Mx | -.015 | 5.5 |
| 100 | MP4A | X | 0 | 1.5 |
| 101 | MP4A | Z | -38.369 | 1.5 |
| 102 | MP4A | Mx | 0 | 1.5 |
| 103 | MP4A | X | 0 | 5.5 |
| 104 | MP4A | Z | -38.369 | 5.5 |
| 105 | MP4A | Mx | 0 | 5.5 |
| 106 | MP4B | X | 0 | 1.5 |
| 107 | MP4B | Z | -35.482 | 1.5 |
| 108 | MP4B | Mx | .015 | 1.5 |
| 109 | MP4B | X | 0 | 5.5 |
| 110 | MP4B | Z | -35.482 | 5.5 |
| 111 | MP4B | Mx | .015 | 5.5 |
| 112 | MP4C | X | 0 | 1.5 |
| 113 | MP4C | Z | -35.482 | 1.5 |
| 114 | MP4C | Mx | -.015 | 1.5 |
| 115 | MP4C | X | 0 | 5.5 |
| 116 | MP4C | Z | -35.482 | 5.5 |
| 117 | MP4C | Mx | -.015 | 5.5 |

Member Point Loads (BLC 16 : Antenna Wi (30 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 8.331 | 2.5 |
| 2 | MP3A | Z | -14.43 | 2.5 |
| 3 | MP3A | Mx | -.004 | 2.5 |
| 4 | MP3A | X | 8.331 | 4.5 |
| 5 | MP3A | Z | -14.43 | 4.5 |
| 6 | MP3A | Mx | -.004 | 4.5 |
| 7 | MP3B | X | 4.145 | 2.5 |
| 8 | MP3B | Z | -7.18 | 2.5 |
| 9 | MP3B | Mx | .004 | 2.5 |
| 10 | MP3B | X | 4.145 | 4.5 |

Member Point Loads (BLC 16 : Antenna Wi (30 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 11 | MP3B | Z | -7.18 | 4.5 |
| 12 | MP3B | Mx | .004 | 4.5 |
| 13 | MP3C | X | 8.331 | 2.5 |
| 14 | MP3C | Z | -14.43 | 2.5 |
| 15 | MP3C | Mx | -.004 | 2.5 |
| 16 | MP3C | X | 8.331 | 4.5 |
| 17 | MP3C | Z | -14.43 | 4.5 |
| 18 | MP3C | Mx | -.004 | 4.5 |
| 19 | MP2A | X | 1.869 | 2 |
| 20 | MP2A | Z | -3.236 | 2 |
| 21 | MP2A | Mx | .000934 | 2 |
| 22 | MP2B | X | 1.496 | 2 |
| 23 | MP2B | Z | -2.591 | 2 |
| 24 | MP2B | Mx | -.001 | 2 |
| 25 | MP2C | X | 1.869 | 2 |
| 26 | MP2C | Z | -3.236 | 2 |
| 27 | MP2C | Mx | .000934 | 2 |
| 28 | MP2A | X | 7.577 | 3.5 |
| 29 | MP2A | Z | -13.123 | 3.5 |
| 30 | MP2A | Mx | .004 | 3.5 |
| 31 | MP2B | X | 5.705 | 3.5 |
| 32 | MP2B | Z | -9.882 | 3.5 |
| 33 | MP2B | Mx | -.006 | 3.5 |
| 34 | MP2C | X | 7.577 | 3.5 |
| 35 | MP2C | Z | -13.123 | 3.5 |
| 36 | MP2C | Mx | .004 | 3.5 |
| 37 | MP3A | X | 7.34 | 3.5 |
| 38 | MP3A | Z | -12.713 | 3.5 |
| 39 | MP3A | Mx | .004 | 3.5 |
| 40 | MP3B | X | 4.757 | 3.5 |
| 41 | MP3B | Z | -8.24 | 3.5 |
| 42 | MP3B | Mx | -.005 | 3.5 |
| 43 | MP3C | X | 7.34 | 3.5 |
| 44 | MP3C | Z | -12.713 | 3.5 |
| 45 | MP3C | Mx | .004 | 3.5 |
| 46 | MP2A | X | 16.833 | 1.5 |
| 47 | MP2A | Z | -29.155 | 1.5 |
| 48 | MP2A | Mx | -.025 | 1.5 |
| 49 | MP2A | X | 16.833 | 5.5 |
| 50 | MP2A | Z | -29.155 | 5.5 |
| 51 | MP2A | Mx | -.025 | 5.5 |
| 52 | MP2B | X | 12.476 | 1.5 |
| 53 | MP2B | Z | -21.609 | 1.5 |
| 54 | MP2B | Mx | -.012 | 1.5 |
| 55 | MP2B | X | 12.476 | 5.5 |
| 56 | MP2B | Z | -21.609 | 5.5 |
| 57 | MP2B | Mx | -.012 | 5.5 |
| 58 | MP2C | X | 12.476 | 1.5 |
| 59 | MP2C | Z | -21.609 | 1.5 |
| 60 | MP2C | Mx | .012 | 1.5 |
| 61 | MP2C | X | 12.476 | 5.5 |
| 62 | MP2C | Z | -21.609 | 5.5 |
| 63 | MP2C | Mx | .012 | 5.5 |
| 64 | MP2A | X | 16.833 | 1.5 |
| 65 | MP2A | Z | -29.155 | 1.5 |
| 66 | MP2A | Mx | .009 | 1.5 |
| 67 | MP2A | X | 16.833 | 5.5 |

Member Point Loads (BLC 16 : Antenna Wi (30 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 68 | MP2A | Z | -29.155 | 5.5 |
| 69 | MP2A | Mx | .009 | 5.5 |
| 70 | MP2B | X | 12.476 | 1.5 |
| 71 | MP2B | Z | -21.609 | 1.5 |
| 72 | MP2B | Mx | -.012 | 1.5 |
| 73 | MP2B | X | 12.476 | 5.5 |
| 74 | MP2B | Z | -21.609 | 5.5 |
| 75 | MP2B | Mx | -.012 | 5.5 |
| 76 | MP2C | X | 16.833 | 1.5 |
| 77 | MP2C | Z | -29.155 | 1.5 |
| 78 | MP2C | Mx | -.025 | 1.5 |
| 79 | MP2C | X | 16.833 | 5.5 |
| 80 | MP2C | Z | -29.155 | 5.5 |
| 81 | MP2C | Mx | -.025 | 5.5 |
| 82 | MP1A | X | 18.703 | 1.5 |
| 83 | MP1A | Z | -32.395 | 1.5 |
| 84 | MP1A | Mx | -.009 | 1.5 |
| 85 | MP1A | X | 18.703 | 5.5 |
| 86 | MP1A | Z | -32.395 | 5.5 |
| 87 | MP1A | Mx | -.009 | 5.5 |
| 88 | MP1B | X | 17.259 | 1.5 |
| 89 | MP1B | Z | -29.894 | 1.5 |
| 90 | MP1B | Mx | .017 | 1.5 |
| 91 | MP1B | X | 17.259 | 5.5 |
| 92 | MP1B | Z | -29.894 | 5.5 |
| 93 | MP1B | Mx | .017 | 5.5 |
| 94 | MP1C | X | 18.703 | 1.5 |
| 95 | MP1C | Z | -32.395 | 1.5 |
| 96 | MP1C | Mx | -.009 | 1.5 |
| 97 | MP1C | X | 18.703 | 5.5 |
| 98 | MP1C | Z | -32.395 | 5.5 |
| 99 | MP1C | Mx | -.009 | 5.5 |
| 100 | MP4A | X | 18.703 | 1.5 |
| 101 | MP4A | Z | -32.395 | 1.5 |
| 102 | MP4A | Mx | -.009 | 1.5 |
| 103 | MP4A | X | 18.703 | 5.5 |
| 104 | MP4A | Z | -32.395 | 5.5 |
| 105 | MP4A | Mx | -.009 | 5.5 |
| 106 | MP4B | X | 17.259 | 1.5 |
| 107 | MP4B | Z | -29.894 | 1.5 |
| 108 | MP4B | Mx | .017 | 1.5 |
| 109 | MP4B | X | 17.259 | 5.5 |
| 110 | MP4B | Z | -29.894 | 5.5 |
| 111 | MP4B | Mx | .017 | 5.5 |
| 112 | MP4C | X | 18.703 | 1.5 |
| 113 | MP4C | Z | -32.395 | 1.5 |
| 114 | MP4C | Mx | -.009 | 1.5 |
| 115 | MP4C | X | 18.703 | 5.5 |
| 116 | MP4C | Z | -32.395 | 5.5 |
| 117 | MP4C | Mx | -.009 | 5.5 |

Member Point Loads (BLC 17 : Antenna Wi (60 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|---|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 9.597 | 2.5 |
| 2 | MP3A | Z | -5.541 | 2.5 |
| 3 | MP3A | Mx | -.005 | 2.5 |

Member Point Loads (BLC 17 : Antenna Wi (60 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 4 | MP3A | X | 9.597 | 4.5 |
| 5 | MP3A | Z | -5.541 | 4.5 |
| 6 | MP3A | Mx | -.005 | 4.5 |
| 7 | MP3B | X | 9.597 | 2.5 |
| 8 | MP3B | Z | -5.541 | 2.5 |
| 9 | MP3B | Mx | .005 | 2.5 |
| 10 | MP3B | X | 9.597 | 4.5 |
| 11 | MP3B | Z | -5.541 | 4.5 |
| 12 | MP3B | Mx | .005 | 4.5 |
| 13 | MP3C | X | 16.847 | 2.5 |
| 14 | MP3C | Z | -9.727 | 2.5 |
| 15 | MP3C | Mx | 0 | 2.5 |
| 16 | MP3C | X | 16.847 | 4.5 |
| 17 | MP3C | Z | -9.727 | 4.5 |
| 18 | MP3C | Mx | 0 | 4.5 |
| 19 | MP2A | X | 2.806 | 2 |
| 20 | MP2A | Z | -1.62 | 2 |
| 21 | MP2A | Mx | .001 | 2 |
| 22 | MP2B | X | 2.806 | 2 |
| 23 | MP2B | Z | -1.62 | 2 |
| 24 | MP2B | Mx | -.001 | 2 |
| 25 | MP2C | X | 3.451 | 2 |
| 26 | MP2C | Z | -1.993 | 2 |
| 27 | MP2C | Mx | 0 | 2 |
| 28 | MP2A | X | 10.962 | 3.5 |
| 29 | MP2A | Z | -6.329 | 3.5 |
| 30 | MP2A | Mx | .005 | 3.5 |
| 31 | MP2B | X | 10.962 | 3.5 |
| 32 | MP2B | Z | -6.329 | 3.5 |
| 33 | MP2B | Mx | -.005 | 3.5 |
| 34 | MP2C | X | 14.203 | 3.5 |
| 35 | MP2C | Z | -8.2 | 3.5 |
| 36 | MP2C | Mx | 0 | 3.5 |
| 37 | MP3A | X | 9.731 | 3.5 |
| 38 | MP3A | Z | -5.618 | 3.5 |
| 39 | MP3A | Mx | .005 | 3.5 |
| 40 | MP3B | X | 9.731 | 3.5 |
| 41 | MP3B | Z | -5.618 | 3.5 |
| 42 | MP3B | Mx | -.005 | 3.5 |
| 43 | MP3C | X | 14.203 | 3.5 |
| 44 | MP3C | Z | -8.2 | 3.5 |
| 45 | MP3C | Mx | 0 | 3.5 |
| 46 | MP2A | X | 24.124 | 1.5 |
| 47 | MP2A | Z | -13.928 | 1.5 |
| 48 | MP2A | Mx | -.02 | 1.5 |
| 49 | MP2A | X | 24.124 | 5.5 |
| 50 | MP2A | Z | -13.928 | 5.5 |
| 51 | MP2A | Mx | -.02 | 5.5 |
| 52 | MP2B | X | 24.124 | 1.5 |
| 53 | MP2B | Z | -13.928 | 1.5 |
| 54 | MP2B | Mx | -.004 | 1.5 |
| 55 | MP2B | X | 24.124 | 5.5 |
| 56 | MP2B | Z | -13.928 | 5.5 |
| 57 | MP2B | Mx | -.004 | 5.5 |
| 58 | MP2C | X | 24.124 | 1.5 |
| 59 | MP2C | Z | -13.928 | 1.5 |
| 60 | MP2C | Mx | .004 | 1.5 |

Member Point Loads (BLC 17 : Antenna Wi (60 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 61 | MP2C | X | 24.124 | 5.5 |
| 62 | MP2C | Z | -13.928 | 5.5 |
| 63 | MP2C | Mx | .004 | 5.5 |
| 64 | MP2A | X | 24.124 | 1.5 |
| 65 | MP2A | Z | -13.928 | 1.5 |
| 66 | MP2A | Mx | -.004 | 1.5 |
| 67 | MP2A | X | 24.124 | 5.5 |
| 68 | MP2A | Z | -13.928 | 5.5 |
| 69 | MP2A | Mx | -.004 | 5.5 |
| 70 | MP2B | X | 24.124 | 1.5 |
| 71 | MP2B | Z | -13.928 | 1.5 |
| 72 | MP2B | Mx | -.02 | 1.5 |
| 73 | MP2B | X | 24.124 | 5.5 |
| 74 | MP2B | Z | -13.928 | 5.5 |
| 75 | MP2B | Mx | -.02 | 5.5 |
| 76 | MP2C | X | 31.671 | 1.5 |
| 77 | MP2C | Z | -18.285 | 1.5 |
| 78 | MP2C | Mx | -.021 | 1.5 |
| 79 | MP2C | X | 31.671 | 5.5 |
| 80 | MP2C | Z | -18.285 | 5.5 |
| 81 | MP2C | Mx | -.021 | 5.5 |
| 82 | MP1A | X | 30.728 | 1.5 |
| 83 | MP1A | Z | -17.741 | 1.5 |
| 84 | MP1A | Mx | -.015 | 1.5 |
| 85 | MP1A | X | 30.728 | 5.5 |
| 86 | MP1A | Z | -17.741 | 5.5 |
| 87 | MP1A | Mx | -.015 | 5.5 |
| 88 | MP1B | X | 30.728 | 1.5 |
| 89 | MP1B | Z | -17.741 | 1.5 |
| 90 | MP1B | Mx | .015 | 1.5 |
| 91 | MP1B | X | 30.728 | 5.5 |
| 92 | MP1B | Z | -17.741 | 5.5 |
| 93 | MP1B | Mx | .015 | 5.5 |
| 94 | MP1C | X | 33.229 | 1.5 |
| 95 | MP1C | Z | -19.185 | 1.5 |
| 96 | MP1C | Mx | 0 | 1.5 |
| 97 | MP1C | X | 33.229 | 5.5 |
| 98 | MP1C | Z | -19.185 | 5.5 |
| 99 | MP1C | Mx | 0 | 5.5 |
| 100 | MP4A | X | 30.728 | 1.5 |
| 101 | MP4A | Z | -17.741 | 1.5 |
| 102 | MP4A | Mx | -.015 | 1.5 |
| 103 | MP4A | X | 30.728 | 5.5 |
| 104 | MP4A | Z | -17.741 | 5.5 |
| 105 | MP4A | Mx | -.015 | 5.5 |
| 106 | MP4B | X | 30.728 | 1.5 |
| 107 | MP4B | Z | -17.741 | 1.5 |
| 108 | MP4B | Mx | .015 | 1.5 |
| 109 | MP4B | X | 30.728 | 5.5 |
| 110 | MP4B | Z | -17.741 | 5.5 |
| 111 | MP4B | Mx | .015 | 5.5 |
| 112 | MP4C | X | 33.229 | 1.5 |
| 113 | MP4C | Z | -19.185 | 1.5 |
| 114 | MP4C | Mx | 0 | 1.5 |
| 115 | MP4C | X | 33.229 | 5.5 |
| 116 | MP4C | Z | -19.185 | 5.5 |
| 117 | MP4C | Mx | 0 | 5.5 |

Member Point Loads (BLC 18 : Antenna Wi (90 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 8.29 | 2.5 |
| 2 | MP3A | Z | 0 | 2.5 |
| 3 | MP3A | Mx | -.004 | 2.5 |
| 4 | MP3A | X | 8.29 | 4.5 |
| 5 | MP3A | Z | 0 | 4.5 |
| 6 | MP3A | Mx | -.004 | 4.5 |
| 7 | MP3B | X | 16.663 | 2.5 |
| 8 | MP3B | Z | 0 | 2.5 |
| 9 | MP3B | Mx | .004 | 2.5 |
| 10 | MP3B | X | 16.663 | 4.5 |
| 11 | MP3B | Z | 0 | 4.5 |
| 12 | MP3B | Mx | .004 | 4.5 |
| 13 | MP3C | X | 16.663 | 2.5 |
| 14 | MP3C | Z | 0 | 2.5 |
| 15 | MP3C | Mx | .004 | 2.5 |
| 16 | MP3C | X | 16.663 | 4.5 |
| 17 | MP3C | Z | 0 | 4.5 |
| 18 | MP3C | Mx | .004 | 4.5 |
| 19 | MP2A | X | 2.992 | 2 |
| 20 | MP2A | Z | 0 | 2 |
| 21 | MP2A | Mx | .001 | 2 |
| 22 | MP2B | X | 3.737 | 2 |
| 23 | MP2B | Z | 0 | 2 |
| 24 | MP2B | Mx | -.000934 | 2 |
| 25 | MP2C | X | 3.737 | 2 |
| 26 | MP2C | Z | 0 | 2 |
| 27 | MP2C | Mx | -.000934 | 2 |
| 28 | MP2A | X | 11.411 | 3.5 |
| 29 | MP2A | Z | 0 | 3.5 |
| 30 | MP2A | Mx | .006 | 3.5 |
| 31 | MP2B | X | 15.153 | 3.5 |
| 32 | MP2B | Z | 0 | 3.5 |
| 33 | MP2B | Mx | -.004 | 3.5 |
| 34 | MP2C | X | 15.153 | 3.5 |
| 35 | MP2C | Z | 0 | 3.5 |
| 36 | MP2C | Mx | -.004 | 3.5 |
| 37 | MP3A | X | 9.515 | 3.5 |
| 38 | MP3A | Z | 0 | 3.5 |
| 39 | MP3A | Mx | .005 | 3.5 |
| 40 | MP3B | X | 14.679 | 3.5 |
| 41 | MP3B | Z | 0 | 3.5 |
| 42 | MP3B | Mx | -.004 | 3.5 |
| 43 | MP3C | X | 14.679 | 3.5 |
| 44 | MP3C | Z | 0 | 3.5 |
| 45 | MP3C | Mx | -.004 | 3.5 |
| 46 | MP2A | X | 24.951 | 1.5 |
| 47 | MP2A | Z | 0 | 1.5 |
| 48 | MP2A | Mx | -.012 | 1.5 |
| 49 | MP2A | X | 24.951 | 5.5 |
| 50 | MP2A | Z | 0 | 5.5 |
| 51 | MP2A | Mx | -.012 | 5.5 |
| 52 | MP2B | X | 33.665 | 1.5 |
| 53 | MP2B | Z | 0 | 1.5 |
| 54 | MP2B | Mx | .009 | 1.5 |
| 55 | MP2B | X | 33.665 | 5.5 |
| 56 | MP2B | Z | 0 | 5.5 |
| 57 | MP2B | Mx | .009 | 5.5 |

Member Point Loads (BLC 18 : Antenna Wi (90 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 58 | MP2C | X | 33.665 | 1.5 |
| 59 | MP2C | Z | 0 | 1.5 |
| 60 | MP2C | Mx | -.009 | 1.5 |
| 61 | MP2C | X | 33.665 | 5.5 |
| 62 | MP2C | Z | 0 | 5.5 |
| 63 | MP2C | Mx | -.009 | 5.5 |
| 64 | MP2A | X | 24.951 | 1.5 |
| 65 | MP2A | Z | 0 | 1.5 |
| 66 | MP2A | Mx | -.012 | 1.5 |
| 67 | MP2A | X | 24.951 | 5.5 |
| 68 | MP2A | Z | 0 | 5.5 |
| 69 | MP2A | Mx | -.012 | 5.5 |
| 70 | MP2B | X | 33.665 | 1.5 |
| 71 | MP2B | Z | 0 | 1.5 |
| 72 | MP2B | Mx | -.025 | 1.5 |
| 73 | MP2B | X | 33.665 | 5.5 |
| 74 | MP2B | Z | 0 | 5.5 |
| 75 | MP2B | Mx | -.025 | 5.5 |
| 76 | MP2C | X | 33.665 | 1.5 |
| 77 | MP2C | Z | 0 | 1.5 |
| 78 | MP2C | Mx | -.009 | 1.5 |
| 79 | MP2C | X | 33.665 | 5.5 |
| 80 | MP2C | Z | 0 | 5.5 |
| 81 | MP2C | Mx | -.009 | 5.5 |
| 82 | MP1A | X | 34.519 | 1.5 |
| 83 | MP1A | Z | 0 | 1.5 |
| 84 | MP1A | Mx | -.017 | 1.5 |
| 85 | MP1A | X | 34.519 | 5.5 |
| 86 | MP1A | Z | 0 | 5.5 |
| 87 | MP1A | Mx | -.017 | 5.5 |
| 88 | MP1B | X | 37.407 | 1.5 |
| 89 | MP1B | Z | 0 | 1.5 |
| 90 | MP1B | Mx | .009 | 1.5 |
| 91 | MP1B | X | 37.407 | 5.5 |
| 92 | MP1B | Z | 0 | 5.5 |
| 93 | MP1B | Mx | .009 | 5.5 |
| 94 | MP1C | X | 37.407 | 1.5 |
| 95 | MP1C | Z | 0 | 1.5 |
| 96 | MP1C | Mx | .009 | 1.5 |
| 97 | MP1C | X | 37.407 | 5.5 |
| 98 | MP1C | Z | 0 | 5.5 |
| 99 | MP1C | Mx | .009 | 5.5 |
| 100 | MP4A | X | 34.519 | 1.5 |
| 101 | MP4A | Z | 0 | 1.5 |
| 102 | MP4A | Mx | -.017 | 1.5 |
| 103 | MP4A | X | 34.519 | 5.5 |
| 104 | MP4A | Z | 0 | 5.5 |
| 105 | MP4A | Mx | -.017 | 5.5 |
| 106 | MP4B | X | 37.407 | 1.5 |
| 107 | MP4B | Z | 0 | 1.5 |
| 108 | MP4B | Mx | .009 | 1.5 |
| 109 | MP4B | X | 37.407 | 5.5 |
| 110 | MP4B | Z | 0 | 5.5 |
| 111 | MP4B | Mx | .009 | 5.5 |
| 112 | MP4C | X | 37.407 | 1.5 |
| 113 | MP4C | Z | 0 | 1.5 |
| 114 | MP4C | Mx | .009 | 1.5 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Point Loads (BLC 18 : Antenna Wi (90 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 115 | MP4C | X | 37.407 | 5.5 |
| 116 | MP4C | Z | 0 | 5.5 |
| 117 | MP4C | Mx | .009 | 5.5 |

Member Point Loads (BLC 19 : Antenna Wi (120 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 9.597 | 2.5 |
| 2 | MP3A | Z | 5.541 | 2.5 |
| 3 | MP3A | Mx | -.005 | 2.5 |
| 4 | MP3A | X | 9.597 | 4.5 |
| 5 | MP3A | Z | 5.541 | 4.5 |
| 6 | MP3A | Mx | -.005 | 4.5 |
| 7 | MP3B | X | 16.847 | 2.5 |
| 8 | MP3B | Z | 9.727 | 2.5 |
| 9 | MP3B | Mx | 0 | 2.5 |
| 10 | MP3B | X | 16.847 | 4.5 |
| 11 | MP3B | Z | 9.727 | 4.5 |
| 12 | MP3B | Mx | 0 | 4.5 |
| 13 | MP3C | X | 9.597 | 2.5 |
| 14 | MP3C | Z | 5.541 | 2.5 |
| 15 | MP3C | Mx | .005 | 2.5 |
| 16 | MP3C | X | 9.597 | 4.5 |
| 17 | MP3C | Z | 5.541 | 4.5 |
| 18 | MP3C | Mx | .005 | 4.5 |
| 19 | MP2A | X | 2.806 | 2 |
| 20 | MP2A | Z | 1.62 | 2 |
| 21 | MP2A | Mx | .001 | 2 |
| 22 | MP2B | X | 3.451 | 2 |
| 23 | MP2B | Z | 1.993 | 2 |
| 24 | MP2B | Mx | 0 | 2 |
| 25 | MP2C | X | 2.806 | 2 |
| 26 | MP2C | Z | 1.62 | 2 |
| 27 | MP2C | Mx | -.001 | 2 |
| 28 | MP2A | X | 10.962 | 3.5 |
| 29 | MP2A | Z | 6.329 | 3.5 |
| 30 | MP2A | Mx | .005 | 3.5 |
| 31 | MP2B | X | 14.203 | 3.5 |
| 32 | MP2B | Z | 8.2 | 3.5 |
| 33 | MP2B | Mx | 0 | 3.5 |
| 34 | MP2C | X | 10.962 | 3.5 |
| 35 | MP2C | Z | 6.329 | 3.5 |
| 36 | MP2C | Mx | -.005 | 3.5 |
| 37 | MP3A | X | 9.731 | 3.5 |
| 38 | MP3A | Z | 5.618 | 3.5 |
| 39 | MP3A | Mx | .005 | 3.5 |
| 40 | MP3B | X | 14.203 | 3.5 |
| 41 | MP3B | Z | 8.2 | 3.5 |
| 42 | MP3B | Mx | 0 | 3.5 |
| 43 | MP3C | X | 9.731 | 3.5 |
| 44 | MP3C | Z | 5.618 | 3.5 |
| 45 | MP3C | Mx | -.005 | 3.5 |
| 46 | MP2A | X | 24.124 | 1.5 |
| 47 | MP2A | Z | 13.928 | 1.5 |
| 48 | MP2A | Mx | -.004 | 1.5 |
| 49 | MP2A | X | 24.124 | 5.5 |
| 50 | MP2A | Z | 13.928 | 5.5 |

Member Point Loads (BLC 19 : Antenna Wi (120 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 51 | MP2A | Mx | -0.04 | 5.5 |
| 52 | MP2B | X | 31.671 | 1.5 |
| 53 | MP2B | Z | 18.285 | 1.5 |
| 54 | MP2B | Mx | .021 | 1.5 |
| 55 | MP2B | X | 31.671 | 5.5 |
| 56 | MP2B | Z | 18.285 | 5.5 |
| 57 | MP2B | Mx | .021 | 5.5 |
| 58 | MP2C | X | 31.671 | 1.5 |
| 59 | MP2C | Z | 18.285 | 1.5 |
| 60 | MP2C | Mx | -.021 | 1.5 |
| 61 | MP2C | X | 31.671 | 5.5 |
| 62 | MP2C | Z | 18.285 | 5.5 |
| 63 | MP2C | Mx | -.021 | 5.5 |
| 64 | MP2A | X | 24.124 | 1.5 |
| 65 | MP2A | Z | 13.928 | 1.5 |
| 66 | MP2A | Mx | -.02 | 1.5 |
| 67 | MP2A | X | 24.124 | 5.5 |
| 68 | MP2A | Z | 13.928 | 5.5 |
| 69 | MP2A | Mx | -.02 | 5.5 |
| 70 | MP2B | X | 31.671 | 1.5 |
| 71 | MP2B | Z | 18.285 | 1.5 |
| 72 | MP2B | Mx | -.021 | 1.5 |
| 73 | MP2B | X | 31.671 | 5.5 |
| 74 | MP2B | Z | 18.285 | 5.5 |
| 75 | MP2B | Mx | -.021 | 5.5 |
| 76 | MP2C | X | 24.124 | 1.5 |
| 77 | MP2C | Z | 13.928 | 1.5 |
| 78 | MP2C | Mx | .004 | 1.5 |
| 79 | MP2C | X | 24.124 | 5.5 |
| 80 | MP2C | Z | 13.928 | 5.5 |
| 81 | MP2C | Mx | .004 | 5.5 |
| 82 | MP1A | X | 30.728 | 1.5 |
| 83 | MP1A | Z | 17.741 | 1.5 |
| 84 | MP1A | Mx | -.015 | 1.5 |
| 85 | MP1A | X | 30.728 | 5.5 |
| 86 | MP1A | Z | 17.741 | 5.5 |
| 87 | MP1A | Mx | -.015 | 5.5 |
| 88 | MP1B | X | 33.229 | 1.5 |
| 89 | MP1B | Z | 19.185 | 1.5 |
| 90 | MP1B | Mx | 0 | 1.5 |
| 91 | MP1B | X | 33.229 | 5.5 |
| 92 | MP1B | Z | 19.185 | 5.5 |
| 93 | MP1B | Mx | 0 | 5.5 |
| 94 | MP1C | X | 30.728 | 1.5 |
| 95 | MP1C | Z | 17.741 | 1.5 |
| 96 | MP1C | Mx | .015 | 1.5 |
| 97 | MP1C | X | 30.728 | 5.5 |
| 98 | MP1C | Z | 17.741 | 5.5 |
| 99 | MP1C | Mx | .015 | 5.5 |
| 100 | MP4A | X | 30.728 | 1.5 |
| 101 | MP4A | Z | 17.741 | 1.5 |
| 102 | MP4A | Mx | -.015 | 1.5 |
| 103 | MP4A | X | 30.728 | 5.5 |
| 104 | MP4A | Z | 17.741 | 5.5 |
| 105 | MP4A | Mx | -.015 | 5.5 |
| 106 | MP4B | X | 33.229 | 1.5 |
| 107 | MP4B | Z | 19.185 | 1.5 |

Member Point Loads (BLC 19 : Antenna Wi (120 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 108 | MP4B | Mx | 0 | 1.5 |
| 109 | MP4B | X | 33.229 | 5.5 |
| 110 | MP4B | Z | 19.185 | 5.5 |
| 111 | MP4B | Mx | 0 | 5.5 |
| 112 | MP4C | X | 30.728 | 1.5 |
| 113 | MP4C | Z | 17.741 | 1.5 |
| 114 | MP4C | Mx | .015 | 1.5 |
| 115 | MP4C | X | 30.728 | 5.5 |
| 116 | MP4C | Z | 17.741 | 5.5 |
| 117 | MP4C | Mx | .015 | 5.5 |

Member Point Loads (BLC 20 : Antenna Wi (150 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 8.331 | 2.5 |
| 2 | MP3A | Z | 14.43 | 2.5 |
| 3 | MP3A | Mx | -.004 | 2.5 |
| 4 | MP3A | X | 8.331 | 4.5 |
| 5 | MP3A | Z | 14.43 | 4.5 |
| 6 | MP3A | Mx | -.004 | 4.5 |
| 7 | MP3B | X | 8.331 | 2.5 |
| 8 | MP3B | Z | 14.43 | 2.5 |
| 9 | MP3B | Mx | -.004 | 2.5 |
| 10 | MP3B | X | 8.331 | 4.5 |
| 11 | MP3B | Z | 14.43 | 4.5 |
| 12 | MP3B | Mx | -.004 | 4.5 |
| 13 | MP3C | X | 4.145 | 2.5 |
| 14 | MP3C | Z | 7.18 | 2.5 |
| 15 | MP3C | Mx | .004 | 2.5 |
| 16 | MP3C | X | 4.145 | 4.5 |
| 17 | MP3C | Z | 7.18 | 4.5 |
| 18 | MP3C | Mx | .004 | 4.5 |
| 19 | MP2A | X | 1.869 | 2 |
| 20 | MP2A | Z | 3.236 | 2 |
| 21 | MP2A | Mx | .000934 | 2 |
| 22 | MP2B | X | 1.869 | 2 |
| 23 | MP2B | Z | 3.236 | 2 |
| 24 | MP2B | Mx | .000934 | 2 |
| 25 | MP2C | X | 1.496 | 2 |
| 26 | MP2C | Z | 2.591 | 2 |
| 27 | MP2C | Mx | -.001 | 2 |
| 28 | MP2A | X | 7.577 | 3.5 |
| 29 | MP2A | Z | 13.123 | 3.5 |
| 30 | MP2A | Mx | .004 | 3.5 |
| 31 | MP2B | X | 7.577 | 3.5 |
| 32 | MP2B | Z | 13.123 | 3.5 |
| 33 | MP2B | Mx | .004 | 3.5 |
| 34 | MP2C | X | 5.705 | 3.5 |
| 35 | MP2C | Z | 9.882 | 3.5 |
| 36 | MP2C | Mx | -.006 | 3.5 |
| 37 | MP3A | X | 7.34 | 3.5 |
| 38 | MP3A | Z | 12.713 | 3.5 |
| 39 | MP3A | Mx | .004 | 3.5 |
| 40 | MP3B | X | 7.34 | 3.5 |
| 41 | MP3B | Z | 12.713 | 3.5 |
| 42 | MP3B | Mx | .004 | 3.5 |
| 43 | MP3C | X | 4.757 | 3.5 |

Member Point Loads (BLC 20 : Antenna Wi (150 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 44 | MP3C | Z | 8.24 | 3.5 |
| 45 | MP3C | Mx | -.005 | 3.5 |
| 46 | MP2A | X | 16.833 | 1.5 |
| 47 | MP2A | Z | 29.155 | 1.5 |
| 48 | MP2A | Mx | .009 | 1.5 |
| 49 | MP2A | X | 16.833 | 5.5 |
| 50 | MP2A | Z | 29.155 | 5.5 |
| 51 | MP2A | Mx | .009 | 5.5 |
| 52 | MP2B | X | 16.833 | 1.5 |
| 53 | MP2B | Z | 29.155 | 1.5 |
| 54 | MP2B | Mx | .025 | 1.5 |
| 55 | MP2B | X | 16.833 | 5.5 |
| 56 | MP2B | Z | 29.155 | 5.5 |
| 57 | MP2B | Mx | .025 | 5.5 |
| 58 | MP2C | X | 16.833 | 1.5 |
| 59 | MP2C | Z | 29.155 | 1.5 |
| 60 | MP2C | Mx | -.025 | 1.5 |
| 61 | MP2C | X | 16.833 | 5.5 |
| 62 | MP2C | Z | 29.155 | 5.5 |
| 63 | MP2C | Mx | -.025 | 5.5 |
| 64 | MP2A | X | 16.833 | 1.5 |
| 65 | MP2A | Z | 29.155 | 1.5 |
| 66 | MP2A | Mx | -.025 | 1.5 |
| 67 | MP2A | X | 16.833 | 5.5 |
| 68 | MP2A | Z | 29.155 | 5.5 |
| 69 | MP2A | Mx | -.025 | 5.5 |
| 70 | MP2B | X | 16.833 | 1.5 |
| 71 | MP2B | Z | 29.155 | 1.5 |
| 72 | MP2B | Mx | -.009 | 1.5 |
| 73 | MP2B | X | 16.833 | 5.5 |
| 74 | MP2B | Z | 29.155 | 5.5 |
| 75 | MP2B | Mx | -.009 | 5.5 |
| 76 | MP2C | X | 12.476 | 1.5 |
| 77 | MP2C | Z | 21.609 | 1.5 |
| 78 | MP2C | Mx | .012 | 1.5 |
| 79 | MP2C | X | 12.476 | 5.5 |
| 80 | MP2C | Z | 21.609 | 5.5 |
| 81 | MP2C | Mx | .012 | 5.5 |
| 82 | MP1A | X | 18.703 | 1.5 |
| 83 | MP1A | Z | 32.395 | 1.5 |
| 84 | MP1A | Mx | -.009 | 1.5 |
| 85 | MP1A | X | 18.703 | 5.5 |
| 86 | MP1A | Z | 32.395 | 5.5 |
| 87 | MP1A | Mx | -.009 | 5.5 |
| 88 | MP1B | X | 18.703 | 1.5 |
| 89 | MP1B | Z | 32.395 | 1.5 |
| 90 | MP1B | Mx | -.009 | 1.5 |
| 91 | MP1B | X | 18.703 | 5.5 |
| 92 | MP1B | Z | 32.395 | 5.5 |
| 93 | MP1B | Mx | -.009 | 5.5 |
| 94 | MP1C | X | 17.259 | 1.5 |
| 95 | MP1C | Z | 29.894 | 1.5 |
| 96 | MP1C | Mx | .017 | 1.5 |
| 97 | MP1C | X | 17.259 | 5.5 |
| 98 | MP1C | Z | 29.894 | 5.5 |
| 99 | MP1C | Mx | .017 | 5.5 |
| 100 | MP4A | X | 18.703 | 1.5 |

Member Point Loads (BLC 20 : Antenna Wi (150 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 101 | MP4A | Z | 32.395 | 1.5 |
| 102 | MP4A | Mx | -0.09 | 1.5 |
| 103 | MP4A | X | 18.703 | 5.5 |
| 104 | MP4A | Z | 32.395 | 5.5 |
| 105 | MP4A | Mx | -0.09 | 5.5 |
| 106 | MP4B | X | 18.703 | 1.5 |
| 107 | MP4B | Z | 32.395 | 1.5 |
| 108 | MP4B | Mx | -0.09 | 1.5 |
| 109 | MP4B | X | 18.703 | 5.5 |
| 110 | MP4B | Z | 32.395 | 5.5 |
| 111 | MP4B | Mx | -0.09 | 5.5 |
| 112 | MP4C | X | 17.259 | 1.5 |
| 113 | MP4C | Z | 29.894 | 1.5 |
| 114 | MP4C | Mx | .017 | 1.5 |
| 115 | MP4C | X | 17.259 | 5.5 |
| 116 | MP4C | Z | 29.894 | 5.5 |
| 117 | MP4C | Mx | .017 | 5.5 |

Member Point Loads (BLC 21 : Antenna Wi (180 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 0 | 2.5 |
| 2 | MP3A | Z | 19.453 | 2.5 |
| 3 | MP3A | Mx | 0 | 2.5 |
| 4 | MP3A | X | 0 | 4.5 |
| 5 | MP3A | Z | 19.453 | 4.5 |
| 6 | MP3A | Mx | 0 | 4.5 |
| 7 | MP3B | X | 0 | 2.5 |
| 8 | MP3B | Z | 11.081 | 2.5 |
| 9 | MP3B | Mx | -0.05 | 2.5 |
| 10 | MP3B | X | 0 | 4.5 |
| 11 | MP3B | Z | 11.081 | 4.5 |
| 12 | MP3B | Mx | -0.05 | 4.5 |
| 13 | MP3C | X | 0 | 2.5 |
| 14 | MP3C | Z | 11.081 | 2.5 |
| 15 | MP3C | Mx | .005 | 2.5 |
| 16 | MP3C | X | 0 | 4.5 |
| 17 | MP3C | Z | 11.081 | 4.5 |
| 18 | MP3C | Mx | .005 | 4.5 |
| 19 | MP2A | X | 0 | 2 |
| 20 | MP2A | Z | 3.985 | 2 |
| 21 | MP2A | Mx | 0 | 2 |
| 22 | MP2B | X | 0 | 2 |
| 23 | MP2B | Z | 3.24 | 2 |
| 24 | MP2B | Mx | .001 | 2 |
| 25 | MP2C | X | 0 | 2 |
| 26 | MP2C | Z | 3.24 | 2 |
| 27 | MP2C | Mx | -0.01 | 2 |
| 28 | MP2A | X | 0 | 3.5 |
| 29 | MP2A | Z | 16.401 | 3.5 |
| 30 | MP2A | Mx | 0 | 3.5 |
| 31 | MP2B | X | 0 | 3.5 |
| 32 | MP2B | Z | 12.658 | 3.5 |
| 33 | MP2B | Mx | .005 | 3.5 |
| 34 | MP2C | X | 0 | 3.5 |
| 35 | MP2C | Z | 12.658 | 3.5 |
| 36 | MP2C | Mx | -0.005 | 3.5 |

Member Point Loads (BLC 21 : Antenna Wi (180 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 37 | MP3A | X | 0 | 3.5 |
| 38 | MP3A | Z | 16.401 | 3.5 |
| 39 | MP3A | Mx | 0 | 3.5 |
| 40 | MP3B | X | 0 | 3.5 |
| 41 | MP3B | Z | 11.236 | 3.5 |
| 42 | MP3B | Mx | .005 | 3.5 |
| 43 | MP3C | X | 0 | 3.5 |
| 44 | MP3C | Z | 11.236 | 3.5 |
| 45 | MP3C | Mx | -.005 | 3.5 |
| 46 | MP2A | X | 0 | 1.5 |
| 47 | MP2A | Z | 36.57 | 1.5 |
| 48 | MP2A | Mx | .021 | 1.5 |
| 49 | MP2A | X | 0 | 5.5 |
| 50 | MP2A | Z | 36.57 | 5.5 |
| 51 | MP2A | Mx | .021 | 5.5 |
| 52 | MP2B | X | 0 | 1.5 |
| 53 | MP2B | Z | 27.856 | 1.5 |
| 54 | MP2B | Mx | .02 | 1.5 |
| 55 | MP2B | X | 0 | 5.5 |
| 56 | MP2B | Z | 27.856 | 5.5 |
| 57 | MP2B | Mx | .02 | 5.5 |
| 58 | MP2C | X | 0 | 1.5 |
| 59 | MP2C | Z | 27.856 | 1.5 |
| 60 | MP2C | Mx | -.02 | 1.5 |
| 61 | MP2C | X | 0 | 5.5 |
| 62 | MP2C | Z | 27.856 | 5.5 |
| 63 | MP2C | Mx | -.02 | 5.5 |
| 64 | MP2A | X | 0 | 1.5 |
| 65 | MP2A | Z | 36.57 | 1.5 |
| 66 | MP2A | Mx | -.021 | 1.5 |
| 67 | MP2A | X | 0 | 5.5 |
| 68 | MP2A | Z | 36.57 | 5.5 |
| 69 | MP2A | Mx | -.021 | 5.5 |
| 70 | MP2B | X | 0 | 1.5 |
| 71 | MP2B | Z | 27.856 | 1.5 |
| 72 | MP2B | Mx | .004 | 1.5 |
| 73 | MP2B | X | 0 | 5.5 |
| 74 | MP2B | Z | 27.856 | 5.5 |
| 75 | MP2B | Mx | .004 | 5.5 |
| 76 | MP2C | X | 0 | 1.5 |
| 77 | MP2C | Z | 27.856 | 1.5 |
| 78 | MP2C | Mx | .02 | 1.5 |
| 79 | MP2C | X | 0 | 5.5 |
| 80 | MP2C | Z | 27.856 | 5.5 |
| 81 | MP2C | Mx | .02 | 5.5 |
| 82 | MP1A | X | 0 | 1.5 |
| 83 | MP1A | Z | 38.369 | 1.5 |
| 84 | MP1A | Mx | 0 | 1.5 |
| 85 | MP1A | X | 0 | 5.5 |
| 86 | MP1A | Z | 38.369 | 5.5 |
| 87 | MP1A | Mx | 0 | 5.5 |
| 88 | MP1B | X | 0 | 1.5 |
| 89 | MP1B | Z | 35.482 | 1.5 |
| 90 | MP1B | Mx | -.015 | 1.5 |
| 91 | MP1B | X | 0 | 5.5 |
| 92 | MP1B | Z | 35.482 | 5.5 |
| 93 | MP1B | Mx | -.015 | 5.5 |

Member Point Loads (BLC 21 : Antenna Wi (180 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 94 | MP1C | X | 0 | 1.5 |
| 95 | MP1C | Z | 35.482 | 1.5 |
| 96 | MP1C | Mx | .015 | 1.5 |
| 97 | MP1C | X | 0 | 5.5 |
| 98 | MP1C | Z | 35.482 | 5.5 |
| 99 | MP1C | Mx | .015 | 5.5 |
| 100 | MP4A | X | 0 | 1.5 |
| 101 | MP4A | Z | 38.369 | 1.5 |
| 102 | MP4A | Mx | 0 | 1.5 |
| 103 | MP4A | X | 0 | 5.5 |
| 104 | MP4A | Z | 38.369 | 5.5 |
| 105 | MP4A | Mx | 0 | 5.5 |
| 106 | MP4B | X | 0 | 1.5 |
| 107 | MP4B | Z | 35.482 | 1.5 |
| 108 | MP4B | Mx | -.015 | 1.5 |
| 109 | MP4B | X | 0 | 5.5 |
| 110 | MP4B | Z | 35.482 | 5.5 |
| 111 | MP4B | Mx | -.015 | 5.5 |
| 112 | MP4C | X | 0 | 1.5 |
| 113 | MP4C | Z | 35.482 | 1.5 |
| 114 | MP4C | Mx | .015 | 1.5 |
| 115 | MP4C | X | 0 | 5.5 |
| 116 | MP4C | Z | 35.482 | 5.5 |
| 117 | MP4C | Mx | .015 | 5.5 |

Member Point Loads (BLC 22 : Antenna Wi (210 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | -8.331 | 2.5 |
| 2 | MP3A | Z | 14.43 | 2.5 |
| 3 | MP3A | Mx | .004 | 2.5 |
| 4 | MP3A | X | -8.331 | 4.5 |
| 5 | MP3A | Z | 14.43 | 4.5 |
| 6 | MP3A | Mx | .004 | 4.5 |
| 7 | MP3B | X | -4.145 | 2.5 |
| 8 | MP3B | Z | 7.18 | 2.5 |
| 9 | MP3B | Mx | -.004 | 2.5 |
| 10 | MP3B | X | -4.145 | 4.5 |
| 11 | MP3B | Z | 7.18 | 4.5 |
| 12 | MP3B | Mx | -.004 | 4.5 |
| 13 | MP3C | X | -8.331 | 2.5 |
| 14 | MP3C | Z | 14.43 | 2.5 |
| 15 | MP3C | Mx | .004 | 2.5 |
| 16 | MP3C | X | -8.331 | 4.5 |
| 17 | MP3C | Z | 14.43 | 4.5 |
| 18 | MP3C | Mx | .004 | 4.5 |
| 19 | MP2A | X | -1.869 | 2 |
| 20 | MP2A | Z | 3.236 | 2 |
| 21 | MP2A | Mx | -.000934 | 2 |
| 22 | MP2B | X | -1.496 | 2 |
| 23 | MP2B | Z | 2.591 | 2 |
| 24 | MP2B | Mx | .001 | 2 |
| 25 | MP2C | X | -1.869 | 2 |
| 26 | MP2C | Z | 3.236 | 2 |
| 27 | MP2C | Mx | -.000934 | 2 |
| 28 | MP2A | X | -7.577 | 3.5 |
| 29 | MP2A | Z | 13.123 | 3.5 |

Member Point Loads (BLC 22 : Antenna Wi (210 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 30 | MP2A | Mx | -0.04 | 3.5 |
| 31 | MP2B | X | -5.705 | 3.5 |
| 32 | MP2B | Z | 9.882 | 3.5 |
| 33 | MP2B | Mx | .006 | 3.5 |
| 34 | MP2C | X | -7.577 | 3.5 |
| 35 | MP2C | Z | 13.123 | 3.5 |
| 36 | MP2C | Mx | -0.04 | 3.5 |
| 37 | MP3A | X | -7.34 | 3.5 |
| 38 | MP3A | Z | 12.713 | 3.5 |
| 39 | MP3A | Mx | -0.04 | 3.5 |
| 40 | MP3B | X | -4.757 | 3.5 |
| 41 | MP3B | Z | 8.24 | 3.5 |
| 42 | MP3B | Mx | .005 | 3.5 |
| 43 | MP3C | X | -7.34 | 3.5 |
| 44 | MP3C | Z | 12.713 | 3.5 |
| 45 | MP3C | Mx | -0.04 | 3.5 |
| 46 | MP2A | X | -16.833 | 1.5 |
| 47 | MP2A | Z | 29.155 | 1.5 |
| 48 | MP2A | Mx | .025 | 1.5 |
| 49 | MP2A | X | -16.833 | 5.5 |
| 50 | MP2A | Z | 29.155 | 5.5 |
| 51 | MP2A | Mx | .025 | 5.5 |
| 52 | MP2B | X | -12.476 | 1.5 |
| 53 | MP2B | Z | 21.609 | 1.5 |
| 54 | MP2B | Mx | .012 | 1.5 |
| 55 | MP2B | X | -12.476 | 5.5 |
| 56 | MP2B | Z | 21.609 | 5.5 |
| 57 | MP2B | Mx | .012 | 5.5 |
| 58 | MP2C | X | -12.476 | 1.5 |
| 59 | MP2C | Z | 21.609 | 1.5 |
| 60 | MP2C | Mx | -.012 | 1.5 |
| 61 | MP2C | X | -12.476 | 5.5 |
| 62 | MP2C | Z | 21.609 | 5.5 |
| 63 | MP2C | Mx | -.012 | 5.5 |
| 64 | MP2A | X | -16.833 | 1.5 |
| 65 | MP2A | Z | 29.155 | 1.5 |
| 66 | MP2A | Mx | -.009 | 1.5 |
| 67 | MP2A | X | -16.833 | 5.5 |
| 68 | MP2A | Z | 29.155 | 5.5 |
| 69 | MP2A | Mx | -.009 | 5.5 |
| 70 | MP2B | X | -12.476 | 1.5 |
| 71 | MP2B | Z | 21.609 | 1.5 |
| 72 | MP2B | Mx | .012 | 1.5 |
| 73 | MP2B | X | -12.476 | 5.5 |
| 74 | MP2B | Z | 21.609 | 5.5 |
| 75 | MP2B | Mx | .012 | 5.5 |
| 76 | MP2C | X | -16.833 | 1.5 |
| 77 | MP2C | Z | 29.155 | 1.5 |
| 78 | MP2C | Mx | .025 | 1.5 |
| 79 | MP2C | X | -16.833 | 5.5 |
| 80 | MP2C | Z | 29.155 | 5.5 |
| 81 | MP2C | Mx | .025 | 5.5 |
| 82 | MP1A | X | -18.703 | 1.5 |
| 83 | MP1A | Z | 32.395 | 1.5 |
| 84 | MP1A | Mx | .009 | 1.5 |
| 85 | MP1A | X | -18.703 | 5.5 |
| 86 | MP1A | Z | 32.395 | 5.5 |

Member Point Loads (BLC 22 : Antenna Wi (210 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 87 | MP1A | Mx | .009 | 5.5 |
| 88 | MP1B | X | -17.259 | 1.5 |
| 89 | MP1B | Z | 29.894 | 1.5 |
| 90 | MP1B | Mx | -.017 | 1.5 |
| 91 | MP1B | X | -17.259 | 5.5 |
| 92 | MP1B | Z | 29.894 | 5.5 |
| 93 | MP1B | Mx | -.017 | 5.5 |
| 94 | MP1C | X | -18.703 | 1.5 |
| 95 | MP1C | Z | 32.395 | 1.5 |
| 96 | MP1C | Mx | .009 | 1.5 |
| 97 | MP1C | X | -18.703 | 5.5 |
| 98 | MP1C | Z | 32.395 | 5.5 |
| 99 | MP1C | Mx | .009 | 5.5 |
| 100 | MP4A | X | -18.703 | 1.5 |
| 101 | MP4A | Z | 32.395 | 1.5 |
| 102 | MP4A | Mx | .009 | 1.5 |
| 103 | MP4A | X | -18.703 | 5.5 |
| 104 | MP4A | Z | 32.395 | 5.5 |
| 105 | MP4A | Mx | .009 | 5.5 |
| 106 | MP4B | X | -17.259 | 1.5 |
| 107 | MP4B | Z | 29.894 | 1.5 |
| 108 | MP4B | Mx | -.017 | 1.5 |
| 109 | MP4B | X | -17.259 | 5.5 |
| 110 | MP4B | Z | 29.894 | 5.5 |
| 111 | MP4B | Mx | -.017 | 5.5 |
| 112 | MP4C | X | -18.703 | 1.5 |
| 113 | MP4C | Z | 32.395 | 1.5 |
| 114 | MP4C | Mx | .009 | 1.5 |
| 115 | MP4C | X | -18.703 | 5.5 |
| 116 | MP4C | Z | 32.395 | 5.5 |
| 117 | MP4C | Mx | .009 | 5.5 |

Member Point Loads (BLC 23 : Antenna Wi (240 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | -9.597 | 2.5 |
| 2 | MP3A | Z | 5.541 | 2.5 |
| 3 | MP3A | Mx | .005 | 2.5 |
| 4 | MP3A | X | -9.597 | 4.5 |
| 5 | MP3A | Z | 5.541 | 4.5 |
| 6 | MP3A | Mx | .005 | 4.5 |
| 7 | MP3B | X | -9.597 | 2.5 |
| 8 | MP3B | Z | 5.541 | 2.5 |
| 9 | MP3B | Mx | -.005 | 2.5 |
| 10 | MP3B | X | -9.597 | 4.5 |
| 11 | MP3B | Z | 5.541 | 4.5 |
| 12 | MP3B | Mx | -.005 | 4.5 |
| 13 | MP3C | X | -16.847 | 2.5 |
| 14 | MP3C | Z | 9.727 | 2.5 |
| 15 | MP3C | Mx | 0 | 2.5 |
| 16 | MP3C | X | -16.847 | 4.5 |
| 17 | MP3C | Z | 9.727 | 4.5 |
| 18 | MP3C | Mx | 0 | 4.5 |
| 19 | MP2A | X | -2.806 | 2 |
| 20 | MP2A | Z | 1.62 | 2 |
| 21 | MP2A | Mx | -.001 | 2 |
| 22 | MP2B | X | -2.806 | 2 |

Member Point Loads (BLC 23 : Antenna Wi (240 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 23 | MP2B | Z | 1.62 | 2 |
| 24 | MP2B | Mx | .001 | 2 |
| 25 | MP2C | X | -3.451 | 2 |
| 26 | MP2C | Z | 1.993 | 2 |
| 27 | MP2C | Mx | 0 | 2 |
| 28 | MP2A | X | -10.962 | 3.5 |
| 29 | MP2A | Z | 6.329 | 3.5 |
| 30 | MP2A | Mx | -.005 | 3.5 |
| 31 | MP2B | X | -10.962 | 3.5 |
| 32 | MP2B | Z | 6.329 | 3.5 |
| 33 | MP2B | Mx | .005 | 3.5 |
| 34 | MP2C | X | -14.203 | 3.5 |
| 35 | MP2C | Z | 8.2 | 3.5 |
| 36 | MP2C | Mx | 0 | 3.5 |
| 37 | MP3A | X | -9.731 | 3.5 |
| 38 | MP3A | Z | 5.618 | 3.5 |
| 39 | MP3A | Mx | -.005 | 3.5 |
| 40 | MP3B | X | -9.731 | 3.5 |
| 41 | MP3B | Z | 5.618 | 3.5 |
| 42 | MP3B | Mx | .005 | 3.5 |
| 43 | MP3C | X | -14.203 | 3.5 |
| 44 | MP3C | Z | 8.2 | 3.5 |
| 45 | MP3C | Mx | 0 | 3.5 |
| 46 | MP2A | X | -24.124 | 1.5 |
| 47 | MP2A | Z | 13.928 | 1.5 |
| 48 | MP2A | Mx | .02 | 1.5 |
| 49 | MP2A | X | -24.124 | 5.5 |
| 50 | MP2A | Z | 13.928 | 5.5 |
| 51 | MP2A | Mx | .02 | 5.5 |
| 52 | MP2B | X | -24.124 | 1.5 |
| 53 | MP2B | Z | 13.928 | 1.5 |
| 54 | MP2B | Mx | .004 | 1.5 |
| 55 | MP2B | X | -24.124 | 5.5 |
| 56 | MP2B | Z | 13.928 | 5.5 |
| 57 | MP2B | Mx | .004 | 5.5 |
| 58 | MP2C | X | -24.124 | 1.5 |
| 59 | MP2C | Z | 13.928 | 1.5 |
| 60 | MP2C | Mx | -.004 | 1.5 |
| 61 | MP2C | X | -24.124 | 5.5 |
| 62 | MP2C | Z | 13.928 | 5.5 |
| 63 | MP2C | Mx | -.004 | 5.5 |
| 64 | MP2A | X | -24.124 | 1.5 |
| 65 | MP2A | Z | 13.928 | 1.5 |
| 66 | MP2A | Mx | .004 | 1.5 |
| 67 | MP2A | X | -24.124 | 5.5 |
| 68 | MP2A | Z | 13.928 | 5.5 |
| 69 | MP2A | Mx | .004 | 5.5 |
| 70 | MP2B | X | -24.124 | 1.5 |
| 71 | MP2B | Z | 13.928 | 1.5 |
| 72 | MP2B | Mx | .02 | 1.5 |
| 73 | MP2B | X | -24.124 | 5.5 |
| 74 | MP2B | Z | 13.928 | 5.5 |
| 75 | MP2B | Mx | .02 | 5.5 |
| 76 | MP2C | X | -31.671 | 1.5 |
| 77 | MP2C | Z | 18.285 | 1.5 |
| 78 | MP2C | Mx | .021 | 1.5 |
| 79 | MP2C | X | -31.671 | 5.5 |

Member Point Loads (BLC 23 : Antenna Wi (240 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 80 | MP2C | Z | 18.285 | 5.5 |
| 81 | MP2C | Mx | .021 | 5.5 |
| 82 | MP1A | X | -30.728 | 1.5 |
| 83 | MP1A | Z | 17.741 | 1.5 |
| 84 | MP1A | Mx | .015 | 1.5 |
| 85 | MP1A | X | -30.728 | 5.5 |
| 86 | MP1A | Z | 17.741 | 5.5 |
| 87 | MP1A | Mx | .015 | 5.5 |
| 88 | MP1B | X | -30.728 | 1.5 |
| 89 | MP1B | Z | 17.741 | 1.5 |
| 90 | MP1B | Mx | -.015 | 1.5 |
| 91 | MP1B | X | -30.728 | 5.5 |
| 92 | MP1B | Z | 17.741 | 5.5 |
| 93 | MP1B | Mx | -.015 | 5.5 |
| 94 | MP1C | X | -33.229 | 1.5 |
| 95 | MP1C | Z | 19.185 | 1.5 |
| 96 | MP1C | Mx | 0 | 1.5 |
| 97 | MP1C | X | -33.229 | 5.5 |
| 98 | MP1C | Z | 19.185 | 5.5 |
| 99 | MP1C | Mx | 0 | 5.5 |
| 100 | MP4A | X | -30.728 | 1.5 |
| 101 | MP4A | Z | 17.741 | 1.5 |
| 102 | MP4A | Mx | .015 | 1.5 |
| 103 | MP4A | X | -30.728 | 5.5 |
| 104 | MP4A | Z | 17.741 | 5.5 |
| 105 | MP4A | Mx | .015 | 5.5 |
| 106 | MP4B | X | -30.728 | 1.5 |
| 107 | MP4B | Z | 17.741 | 1.5 |
| 108 | MP4B | Mx | -.015 | 1.5 |
| 109 | MP4B | X | -30.728 | 5.5 |
| 110 | MP4B | Z | 17.741 | 5.5 |
| 111 | MP4B | Mx | -.015 | 5.5 |
| 112 | MP4C | X | -33.229 | 1.5 |
| 113 | MP4C | Z | 19.185 | 1.5 |
| 114 | MP4C | Mx | 0 | 1.5 |
| 115 | MP4C | X | -33.229 | 5.5 |
| 116 | MP4C | Z | 19.185 | 5.5 |
| 117 | MP4C | Mx | 0 | 5.5 |

Member Point Loads (BLC 24 : Antenna Wi (270 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | -8.29 | 2.5 |
| 2 | MP3A | Z | 0 | 2.5 |
| 3 | MP3A | Mx | .004 | 2.5 |
| 4 | MP3A | X | -8.29 | 4.5 |
| 5 | MP3A | Z | 0 | 4.5 |
| 6 | MP3A | Mx | .004 | 4.5 |
| 7 | MP3B | X | -16.663 | 2.5 |
| 8 | MP3B | Z | 0 | 2.5 |
| 9 | MP3B | Mx | -.004 | 2.5 |
| 10 | MP3B | X | -16.663 | 4.5 |
| 11 | MP3B | Z | 0 | 4.5 |
| 12 | MP3B | Mx | -.004 | 4.5 |
| 13 | MP3C | X | -16.663 | 2.5 |
| 14 | MP3C | Z | 0 | 2.5 |
| 15 | MP3C | Mx | -.004 | 2.5 |

Member Point Loads (BLC 24 : Antenna Wi (270 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft,%] |
|----|--------------|-----------|--------------------|----------------|
| 16 | MP3C | X | -16.663 | 4.5 |
| 17 | MP3C | Z | 0 | 4.5 |
| 18 | MP3C | Mx | -.004 | 4.5 |
| 19 | MP2A | X | -2.992 | 2 |
| 20 | MP2A | Z | 0 | 2 |
| 21 | MP2A | Mx | -.001 | 2 |
| 22 | MP2B | X | -3.737 | 2 |
| 23 | MP2B | Z | 0 | 2 |
| 24 | MP2B | Mx | .000934 | 2 |
| 25 | MP2C | X | -3.737 | 2 |
| 26 | MP2C | Z | 0 | 2 |
| 27 | MP2C | Mx | .000934 | 2 |
| 28 | MP2A | X | -11.411 | 3.5 |
| 29 | MP2A | Z | 0 | 3.5 |
| 30 | MP2A | Mx | -.006 | 3.5 |
| 31 | MP2B | X | -15.153 | 3.5 |
| 32 | MP2B | Z | 0 | 3.5 |
| 33 | MP2B | Mx | .004 | 3.5 |
| 34 | MP2C | X | -15.153 | 3.5 |
| 35 | MP2C | Z | 0 | 3.5 |
| 36 | MP2C | Mx | .004 | 3.5 |
| 37 | MP3A | X | -9.515 | 3.5 |
| 38 | MP3A | Z | 0 | 3.5 |
| 39 | MP3A | Mx | -.005 | 3.5 |
| 40 | MP3B | X | -14.679 | 3.5 |
| 41 | MP3B | Z | 0 | 3.5 |
| 42 | MP3B | Mx | .004 | 3.5 |
| 43 | MP3C | X | -14.679 | 3.5 |
| 44 | MP3C | Z | 0 | 3.5 |
| 45 | MP3C | Mx | .004 | 3.5 |
| 46 | MP2A | X | -24.951 | 1.5 |
| 47 | MP2A | Z | 0 | 1.5 |
| 48 | MP2A | Mx | .012 | 1.5 |
| 49 | MP2A | X | -24.951 | 5.5 |
| 50 | MP2A | Z | 0 | 5.5 |
| 51 | MP2A | Mx | .012 | 5.5 |
| 52 | MP2B | X | -33.665 | 1.5 |
| 53 | MP2B | Z | 0 | 1.5 |
| 54 | MP2B | Mx | -.009 | 1.5 |
| 55 | MP2B | X | -33.665 | 5.5 |
| 56 | MP2B | Z | 0 | 5.5 |
| 57 | MP2B | Mx | -.009 | 5.5 |
| 58 | MP2C | X | -33.665 | 1.5 |
| 59 | MP2C | Z | 0 | 1.5 |
| 60 | MP2C | Mx | .009 | 1.5 |
| 61 | MP2C | X | -33.665 | 5.5 |
| 62 | MP2C | Z | 0 | 5.5 |
| 63 | MP2C | Mx | .009 | 5.5 |
| 64 | MP2A | X | -24.951 | 1.5 |
| 65 | MP2A | Z | 0 | 1.5 |
| 66 | MP2A | Mx | .012 | 1.5 |
| 67 | MP2A | X | -24.951 | 5.5 |
| 68 | MP2A | Z | 0 | 5.5 |
| 69 | MP2A | Mx | .012 | 5.5 |
| 70 | MP2B | X | -33.665 | 1.5 |
| 71 | MP2B | Z | 0 | 1.5 |
| 72 | MP2B | Mx | .025 | 1.5 |

Member Point Loads (BLC 24 : Antenna Wi (270 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 73 | MP2B | X | -33.665 | 5.5 |
| 74 | MP2B | Z | 0 | 5.5 |
| 75 | MP2B | Mx | .025 | 5.5 |
| 76 | MP2C | X | -33.665 | 1.5 |
| 77 | MP2C | Z | 0 | 1.5 |
| 78 | MP2C | Mx | .009 | 1.5 |
| 79 | MP2C | X | -33.665 | 5.5 |
| 80 | MP2C | Z | 0 | 5.5 |
| 81 | MP2C | Mx | .009 | 5.5 |
| 82 | MP1A | X | -34.519 | 1.5 |
| 83 | MP1A | Z | 0 | 1.5 |
| 84 | MP1A | Mx | .017 | 1.5 |
| 85 | MP1A | X | -34.519 | 5.5 |
| 86 | MP1A | Z | 0 | 5.5 |
| 87 | MP1A | Mx | .017 | 5.5 |
| 88 | MP1B | X | -37.407 | 1.5 |
| 89 | MP1B | Z | 0 | 1.5 |
| 90 | MP1B | Mx | -.009 | 1.5 |
| 91 | MP1B | X | -37.407 | 5.5 |
| 92 | MP1B | Z | 0 | 5.5 |
| 93 | MP1B | Mx | -.009 | 5.5 |
| 94 | MP1C | X | -37.407 | 1.5 |
| 95 | MP1C | Z | 0 | 1.5 |
| 96 | MP1C | Mx | -.009 | 1.5 |
| 97 | MP1C | X | -37.407 | 5.5 |
| 98 | MP1C | Z | 0 | 5.5 |
| 99 | MP1C | Mx | -.009 | 5.5 |
| 100 | MP4A | X | -34.519 | 1.5 |
| 101 | MP4A | Z | 0 | 1.5 |
| 102 | MP4A | Mx | .017 | 1.5 |
| 103 | MP4A | X | -34.519 | 5.5 |
| 104 | MP4A | Z | 0 | 5.5 |
| 105 | MP4A | Mx | .017 | 5.5 |
| 106 | MP4B | X | -37.407 | 1.5 |
| 107 | MP4B | Z | 0 | 1.5 |
| 108 | MP4B | Mx | -.009 | 1.5 |
| 109 | MP4B | X | -37.407 | 5.5 |
| 110 | MP4B | Z | 0 | 5.5 |
| 111 | MP4B | Mx | -.009 | 5.5 |
| 112 | MP4C | X | -37.407 | 1.5 |
| 113 | MP4C | Z | 0 | 1.5 |
| 114 | MP4C | Mx | -.009 | 1.5 |
| 115 | MP4C | X | -37.407 | 5.5 |
| 116 | MP4C | Z | 0 | 5.5 |
| 117 | MP4C | Mx | -.009 | 5.5 |

Member Point Loads (BLC 25 : Antenna Wi (300 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|---|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | -9.597 | 2.5 |
| 2 | MP3A | Z | -5.541 | 2.5 |
| 3 | MP3A | Mx | .005 | 2.5 |
| 4 | MP3A | X | -9.597 | 4.5 |
| 5 | MP3A | Z | -5.541 | 4.5 |
| 6 | MP3A | Mx | .005 | 4.5 |
| 7 | MP3B | X | -16.847 | 2.5 |
| 8 | MP3B | Z | -9.727 | 2.5 |

Member Point Loads (BLC 25 : Antenna Wi (300 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 9 | MP3B | Mx | 0 | 2.5 |
| 10 | MP3B | X | -16.847 | 4.5 |
| 11 | MP3B | Z | -9.727 | 4.5 |
| 12 | MP3B | Mx | 0 | 4.5 |
| 13 | MP3C | X | -9.597 | 2.5 |
| 14 | MP3C | Z | -5.541 | 2.5 |
| 15 | MP3C | Mx | -.005 | 2.5 |
| 16 | MP3C | X | -9.597 | 4.5 |
| 17 | MP3C | Z | -5.541 | 4.5 |
| 18 | MP3C | Mx | -.005 | 4.5 |
| 19 | MP2A | X | -2.806 | 2 |
| 20 | MP2A | Z | -1.62 | 2 |
| 21 | MP2A | Mx | -.001 | 2 |
| 22 | MP2B | X | -3.451 | 2 |
| 23 | MP2B | Z | -1.993 | 2 |
| 24 | MP2B | Mx | 0 | 2 |
| 25 | MP2C | X | -2.806 | 2 |
| 26 | MP2C | Z | -1.62 | 2 |
| 27 | MP2C | Mx | .001 | 2 |
| 28 | MP2A | X | -10.962 | 3.5 |
| 29 | MP2A | Z | -6.329 | 3.5 |
| 30 | MP2A | Mx | -.005 | 3.5 |
| 31 | MP2B | X | -14.203 | 3.5 |
| 32 | MP2B | Z | -8.2 | 3.5 |
| 33 | MP2B | Mx | 0 | 3.5 |
| 34 | MP2C | X | -10.962 | 3.5 |
| 35 | MP2C | Z | -6.329 | 3.5 |
| 36 | MP2C | Mx | .005 | 3.5 |
| 37 | MP3A | X | -9.731 | 3.5 |
| 38 | MP3A | Z | -5.618 | 3.5 |
| 39 | MP3A | Mx | -.005 | 3.5 |
| 40 | MP3B | X | -14.203 | 3.5 |
| 41 | MP3B | Z | -8.2 | 3.5 |
| 42 | MP3B | Mx | 0 | 3.5 |
| 43 | MP3C | X | -9.731 | 3.5 |
| 44 | MP3C | Z | -5.618 | 3.5 |
| 45 | MP3C | Mx | .005 | 3.5 |
| 46 | MP2A | X | -24.124 | 1.5 |
| 47 | MP2A | Z | -13.928 | 1.5 |
| 48 | MP2A | Mx | .004 | 1.5 |
| 49 | MP2A | X | -24.124 | 5.5 |
| 50 | MP2A | Z | -13.928 | 5.5 |
| 51 | MP2A | Mx | .004 | 5.5 |
| 52 | MP2B | X | -31.671 | 1.5 |
| 53 | MP2B | Z | -18.285 | 1.5 |
| 54 | MP2B | Mx | -.021 | 1.5 |
| 55 | MP2B | X | -31.671 | 5.5 |
| 56 | MP2B | Z | -18.285 | 5.5 |
| 57 | MP2B | Mx | -.021 | 5.5 |
| 58 | MP2C | X | -31.671 | 1.5 |
| 59 | MP2C | Z | -18.285 | 1.5 |
| 60 | MP2C | Mx | .021 | 1.5 |
| 61 | MP2C | X | -31.671 | 5.5 |
| 62 | MP2C | Z | -18.285 | 5.5 |
| 63 | MP2C | Mx | .021 | 5.5 |
| 64 | MP2A | X | -24.124 | 1.5 |
| 65 | MP2A | Z | -13.928 | 1.5 |

Member Point Loads (BLC 25 : Antenna Wi (300 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 66 | MP2A | Mx | .02 | 1.5 |
| 67 | MP2A | X | -24.124 | 5.5 |
| 68 | MP2A | Z | -13.928 | 5.5 |
| 69 | MP2A | Mx | .02 | 5.5 |
| 70 | MP2B | X | -31.671 | 1.5 |
| 71 | MP2B | Z | -18.285 | 1.5 |
| 72 | MP2B | Mx | .021 | 1.5 |
| 73 | MP2B | X | -31.671 | 5.5 |
| 74 | MP2B | Z | -18.285 | 5.5 |
| 75 | MP2B | Mx | .021 | 5.5 |
| 76 | MP2C | X | -24.124 | 1.5 |
| 77 | MP2C | Z | -13.928 | 1.5 |
| 78 | MP2C | Mx | -.004 | 1.5 |
| 79 | MP2C | X | -24.124 | 5.5 |
| 80 | MP2C | Z | -13.928 | 5.5 |
| 81 | MP2C | Mx | -.004 | 5.5 |
| 82 | MP1A | X | -30.728 | 1.5 |
| 83 | MP1A | Z | -17.741 | 1.5 |
| 84 | MP1A | Mx | .015 | 1.5 |
| 85 | MP1A | X | -30.728 | 5.5 |
| 86 | MP1A | Z | -17.741 | 5.5 |
| 87 | MP1A | Mx | .015 | 5.5 |
| 88 | MP1B | X | -33.229 | 1.5 |
| 89 | MP1B | Z | -19.185 | 1.5 |
| 90 | MP1B | Mx | 0 | 1.5 |
| 91 | MP1B | X | -33.229 | 5.5 |
| 92 | MP1B | Z | -19.185 | 5.5 |
| 93 | MP1B | Mx | 0 | 5.5 |
| 94 | MP1C | X | -30.728 | 1.5 |
| 95 | MP1C | Z | -17.741 | 1.5 |
| 96 | MP1C | Mx | -.015 | 1.5 |
| 97 | MP1C | X | -30.728 | 5.5 |
| 98 | MP1C | Z | -17.741 | 5.5 |
| 99 | MP1C | Mx | -.015 | 5.5 |
| 100 | MP4A | X | -30.728 | 1.5 |
| 101 | MP4A | Z | -17.741 | 1.5 |
| 102 | MP4A | Mx | .015 | 1.5 |
| 103 | MP4A | X | -30.728 | 5.5 |
| 104 | MP4A | Z | -17.741 | 5.5 |
| 105 | MP4A | Mx | .015 | 5.5 |
| 106 | MP4B | X | -33.229 | 1.5 |
| 107 | MP4B | Z | -19.185 | 1.5 |
| 108 | MP4B | Mx | 0 | 1.5 |
| 109 | MP4B | X | -33.229 | 5.5 |
| 110 | MP4B | Z | -19.185 | 5.5 |
| 111 | MP4B | Mx | 0 | 5.5 |
| 112 | MP4C | X | -30.728 | 1.5 |
| 113 | MP4C | Z | -17.741 | 1.5 |
| 114 | MP4C | Mx | -.015 | 1.5 |
| 115 | MP4C | X | -30.728 | 5.5 |
| 116 | MP4C | Z | -17.741 | 5.5 |
| 117 | MP4C | Mx | -.015 | 5.5 |

Member Point Loads (BLC 26 : Antenna Wi (330 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|---|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | -8.331 | 2.5 |

Member Point Loads (BLC 26 : Antenna Wi (330 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 2 | MP3A | Z | -14.43 | 2.5 |
| 3 | MP3A | Mx | .004 | 2.5 |
| 4 | MP3A | X | -8.331 | 4.5 |
| 5 | MP3A | Z | -14.43 | 4.5 |
| 6 | MP3A | Mx | .004 | 4.5 |
| 7 | MP3B | X | -8.331 | 2.5 |
| 8 | MP3B | Z | -14.43 | 2.5 |
| 9 | MP3B | Mx | .004 | 2.5 |
| 10 | MP3B | X | -8.331 | 4.5 |
| 11 | MP3B | Z | -14.43 | 4.5 |
| 12 | MP3B | Mx | .004 | 4.5 |
| 13 | MP3C | X | -4.145 | 2.5 |
| 14 | MP3C | Z | -7.18 | 2.5 |
| 15 | MP3C | Mx | -.004 | 2.5 |
| 16 | MP3C | X | -4.145 | 4.5 |
| 17 | MP3C | Z | -7.18 | 4.5 |
| 18 | MP3C | Mx | -.004 | 4.5 |
| 19 | MP2A | X | -1.869 | 2 |
| 20 | MP2A | Z | -3.236 | 2 |
| 21 | MP2A | Mx | -.000934 | 2 |
| 22 | MP2B | X | -1.869 | 2 |
| 23 | MP2B | Z | -3.236 | 2 |
| 24 | MP2B | Mx | -.000934 | 2 |
| 25 | MP2C | X | -1.496 | 2 |
| 26 | MP2C | Z | -2.591 | 2 |
| 27 | MP2C | Mx | .001 | 2 |
| 28 | MP2A | X | -7.577 | 3.5 |
| 29 | MP2A | Z | -13.123 | 3.5 |
| 30 | MP2A | Mx | -.004 | 3.5 |
| 31 | MP2B | X | -7.577 | 3.5 |
| 32 | MP2B | Z | -13.123 | 3.5 |
| 33 | MP2B | Mx | -.004 | 3.5 |
| 34 | MP2C | X | -5.705 | 3.5 |
| 35 | MP2C | Z | -9.882 | 3.5 |
| 36 | MP2C | Mx | .006 | 3.5 |
| 37 | MP3A | X | -7.34 | 3.5 |
| 38 | MP3A | Z | -12.713 | 3.5 |
| 39 | MP3A | Mx | -.004 | 3.5 |
| 40 | MP3B | X | -7.34 | 3.5 |
| 41 | MP3B | Z | -12.713 | 3.5 |
| 42 | MP3B | Mx | -.004 | 3.5 |
| 43 | MP3C | X | -4.757 | 3.5 |
| 44 | MP3C | Z | -8.24 | 3.5 |
| 45 | MP3C | Mx | .005 | 3.5 |
| 46 | MP2A | X | -16.833 | 1.5 |
| 47 | MP2A | Z | -29.155 | 1.5 |
| 48 | MP2A | Mx | -.009 | 1.5 |
| 49 | MP2A | X | -16.833 | 5.5 |
| 50 | MP2A | Z | -29.155 | 5.5 |
| 51 | MP2A | Mx | -.009 | 5.5 |
| 52 | MP2B | X | -16.833 | 1.5 |
| 53 | MP2B | Z | -29.155 | 1.5 |
| 54 | MP2B | Mx | -.025 | 1.5 |
| 55 | MP2B | X | -16.833 | 5.5 |
| 56 | MP2B | Z | -29.155 | 5.5 |
| 57 | MP2B | Mx | -.025 | 5.5 |
| 58 | MP2C | X | -16.833 | 1.5 |

Member Point Loads (BLC 26 : Antenna Wi (330 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 59 | MP2C | Z | -29.155 | 1.5 |
| 60 | MP2C | Mx | .025 | 1.5 |
| 61 | MP2C | X | -16.833 | 5.5 |
| 62 | MP2C | Z | -29.155 | 5.5 |
| 63 | MP2C | Mx | .025 | 5.5 |
| 64 | MP2A | X | -16.833 | 1.5 |
| 65 | MP2A | Z | -29.155 | 1.5 |
| 66 | MP2A | Mx | .025 | 1.5 |
| 67 | MP2A | X | -16.833 | 5.5 |
| 68 | MP2A | Z | -29.155 | 5.5 |
| 69 | MP2A | Mx | .025 | 5.5 |
| 70 | MP2B | X | -16.833 | 1.5 |
| 71 | MP2B | Z | -29.155 | 1.5 |
| 72 | MP2B | Mx | .009 | 1.5 |
| 73 | MP2B | X | -16.833 | 5.5 |
| 74 | MP2B | Z | -29.155 | 5.5 |
| 75 | MP2B | Mx | .009 | 5.5 |
| 76 | MP2C | X | -12.476 | 1.5 |
| 77 | MP2C | Z | -21.609 | 1.5 |
| 78 | MP2C | Mx | -.012 | 1.5 |
| 79 | MP2C | X | -12.476 | 5.5 |
| 80 | MP2C | Z | -21.609 | 5.5 |
| 81 | MP2C | Mx | -.012 | 5.5 |
| 82 | MP1A | X | -18.703 | 1.5 |
| 83 | MP1A | Z | -32.395 | 1.5 |
| 84 | MP1A | Mx | .009 | 1.5 |
| 85 | MP1A | X | -18.703 | 5.5 |
| 86 | MP1A | Z | -32.395 | 5.5 |
| 87 | MP1A | Mx | .009 | 5.5 |
| 88 | MP1B | X | -18.703 | 1.5 |
| 89 | MP1B | Z | -32.395 | 1.5 |
| 90 | MP1B | Mx | .009 | 1.5 |
| 91 | MP1B | X | -18.703 | 5.5 |
| 92 | MP1B | Z | -32.395 | 5.5 |
| 93 | MP1B | Mx | .009 | 5.5 |
| 94 | MP1C | X | -17.259 | 1.5 |
| 95 | MP1C | Z | -29.894 | 1.5 |
| 96 | MP1C | Mx | -.017 | 1.5 |
| 97 | MP1C | X | -17.259 | 5.5 |
| 98 | MP1C | Z | -29.894 | 5.5 |
| 99 | MP1C | Mx | -.017 | 5.5 |
| 100 | MP4A | X | -18.703 | 1.5 |
| 101 | MP4A | Z | -32.395 | 1.5 |
| 102 | MP4A | Mx | .009 | 1.5 |
| 103 | MP4A | X | -18.703 | 5.5 |
| 104 | MP4A | Z | -32.395 | 5.5 |
| 105 | MP4A | Mx | .009 | 5.5 |
| 106 | MP4B | X | -18.703 | 1.5 |
| 107 | MP4B | Z | -32.395 | 1.5 |
| 108 | MP4B | Mx | .009 | 1.5 |
| 109 | MP4B | X | -18.703 | 5.5 |
| 110 | MP4B | Z | -32.395 | 5.5 |
| 111 | MP4B | Mx | .009 | 5.5 |
| 112 | MP4C | X | -17.259 | 1.5 |
| 113 | MP4C | Z | -29.894 | 1.5 |
| 114 | MP4C | Mx | -.017 | 1.5 |
| 115 | MP4C | X | -17.259 | 5.5 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Point Loads (BLC 26 : Antenna Wi (330 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 116 | MP4C | Z | -29.894 | 5.5 |
| 117 | MP4C | Mx | -.017 | 5.5 |

Member Point Loads (BLC 27 : Antenna Wm (0 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 0 | 2.5 |
| 2 | MP3A | Z | -6.195 | 2.5 |
| 3 | MP3A | Mx | 0 | 2.5 |
| 4 | MP3A | X | 0 | 4.5 |
| 5 | MP3A | Z | -6.195 | 4.5 |
| 6 | MP3A | Mx | 0 | 4.5 |
| 7 | MP3B | X | 0 | 2.5 |
| 8 | MP3B | Z | -3.368 | 2.5 |
| 9 | MP3B | Mx | .001 | 2.5 |
| 10 | MP3B | X | 0 | 4.5 |
| 11 | MP3B | Z | -3.368 | 4.5 |
| 12 | MP3B | Mx | .001 | 4.5 |
| 13 | MP3C | X | 0 | 2.5 |
| 14 | MP3C | Z | -3.368 | 2.5 |
| 15 | MP3C | Mx | -.001 | 2.5 |
| 16 | MP3C | X | 0 | 4.5 |
| 17 | MP3C | Z | -3.368 | 4.5 |
| 18 | MP3C | Mx | -.001 | 4.5 |
| 19 | MP2A | X | 0 | 2 |
| 20 | MP2A | Z | -.975 | 2 |
| 21 | MP2A | Mx | 0 | 2 |
| 22 | MP2B | X | 0 | 2 |
| 23 | MP2B | Z | -.75 | 2 |
| 24 | MP2B | Mx | -.000325 | 2 |
| 25 | MP2C | X | 0 | 2 |
| 26 | MP2C | Z | -.75 | 2 |
| 27 | MP2C | Mx | .000325 | 2 |
| 28 | MP2A | X | 0 | 3.5 |
| 29 | MP2A | Z | -4.93 | 3.5 |
| 30 | MP2A | Mx | 0 | 3.5 |
| 31 | MP2B | X | 0 | 3.5 |
| 32 | MP2B | Z | -3.704 | 3.5 |
| 33 | MP2B | Mx | -.002 | 3.5 |
| 34 | MP2C | X | 0 | 3.5 |
| 35 | MP2C | Z | -3.704 | 3.5 |
| 36 | MP2C | Mx | .002 | 3.5 |
| 37 | MP3A | X | 0 | 3.5 |
| 38 | MP3A | Z | -4.93 | 3.5 |
| 39 | MP3A | Mx | 0 | 3.5 |
| 40 | MP3B | X | 0 | 3.5 |
| 41 | MP3B | Z | -3.234 | 3.5 |
| 42 | MP3B | Mx | -.001 | 3.5 |
| 43 | MP3C | X | 0 | 3.5 |
| 44 | MP3C | Z | -3.234 | 3.5 |
| 45 | MP3C | Mx | .001 | 3.5 |
| 46 | MP2A | X | 0 | 1.5 |
| 47 | MP2A | Z | -12.008 | 1.5 |
| 48 | MP2A | Mx | -.007 | 1.5 |
| 49 | MP2A | X | 0 | 5.5 |
| 50 | MP2A | Z | -12.008 | 5.5 |
| 51 | MP2A | Mx | -.007 | 5.5 |

Member Point Loads (BLC 27 : Antenna Wm (0 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 52 | MP2B | X | 0 | 1.5 |
| 53 | MP2B | Z | -8.917 | 1.5 |
| 54 | MP2B | Mx | -.006 | 1.5 |
| 55 | MP2B | X | 0 | 5.5 |
| 56 | MP2B | Z | -8.917 | 5.5 |
| 57 | MP2B | Mx | -.006 | 5.5 |
| 58 | MP2C | X | 0 | 1.5 |
| 59 | MP2C | Z | -8.917 | 1.5 |
| 60 | MP2C | Mx | .006 | 1.5 |
| 61 | MP2C | X | 0 | 5.5 |
| 62 | MP2C | Z | -8.917 | 5.5 |
| 63 | MP2C | Mx | .006 | 5.5 |
| 64 | MP2A | X | 0 | 1.5 |
| 65 | MP2A | Z | -12.008 | 1.5 |
| 66 | MP2A | Mx | .007 | 1.5 |
| 67 | MP2A | X | 0 | 5.5 |
| 68 | MP2A | Z | -12.008 | 5.5 |
| 69 | MP2A | Mx | .007 | 5.5 |
| 70 | MP2B | X | 0 | 1.5 |
| 71 | MP2B | Z | -8.917 | 1.5 |
| 72 | MP2B | Mx | -.001 | 1.5 |
| 73 | MP2B | X | 0 | 5.5 |
| 74 | MP2B | Z | -8.917 | 5.5 |
| 75 | MP2B | Mx | -.001 | 5.5 |
| 76 | MP2C | X | 0 | 1.5 |
| 77 | MP2C | Z | -8.917 | 1.5 |
| 78 | MP2C | Mx | -.006 | 1.5 |
| 79 | MP2C | X | 0 | 5.5 |
| 80 | MP2C | Z | -8.917 | 5.5 |
| 81 | MP2C | Mx | -.006 | 5.5 |
| 82 | MP1A | X | 0 | 1.5 |
| 83 | MP1A | Z | -12.654 | 1.5 |
| 84 | MP1A | Mx | 0 | 1.5 |
| 85 | MP1A | X | 0 | 5.5 |
| 86 | MP1A | Z | -12.654 | 5.5 |
| 87 | MP1A | Mx | 0 | 5.5 |
| 88 | MP1B | X | 0 | 1.5 |
| 89 | MP1B | Z | -11.64 | 1.5 |
| 90 | MP1B | Mx | .005 | 1.5 |
| 91 | MP1B | X | 0 | 5.5 |
| 92 | MP1B | Z | -11.64 | 5.5 |
| 93 | MP1B | Mx | .005 | 5.5 |
| 94 | MP1C | X | 0 | 1.5 |
| 95 | MP1C | Z | -11.64 | 1.5 |
| 96 | MP1C | Mx | -.005 | 1.5 |
| 97 | MP1C | X | 0 | 5.5 |
| 98 | MP1C | Z | -11.64 | 5.5 |
| 99 | MP1C | Mx | -.005 | 5.5 |
| 100 | MP4A | X | 0 | 1.5 |
| 101 | MP4A | Z | -12.654 | 1.5 |
| 102 | MP4A | Mx | 0 | 1.5 |
| 103 | MP4A | X | 0 | 5.5 |
| 104 | MP4A | Z | -12.654 | 5.5 |
| 105 | MP4A | Mx | 0 | 5.5 |
| 106 | MP4B | X | 0 | 1.5 |
| 107 | MP4B | Z | -11.64 | 1.5 |
| 108 | MP4B | Mx | .005 | 1.5 |

Member Point Loads (BLC 27 : Antenna Wm (0 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft. %] |
|-----|--------------|-----------|--------------------|-----------------|
| 109 | MP4B | X | 0 | 5.5 |
| 110 | MP4B | Z | -11.64 | 5.5 |
| 111 | MP4B | Mx | .005 | 5.5 |
| 112 | MP4C | X | 0 | 1.5 |
| 113 | MP4C | Z | -11.64 | 1.5 |
| 114 | MP4C | Mx | -.005 | 1.5 |
| 115 | MP4C | X | 0 | 5.5 |
| 116 | MP4C | Z | -11.64 | 5.5 |
| 117 | MP4C | Mx | -.005 | 5.5 |

Member Point Loads (BLC 28 : Antenna Wm (30 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft. %] |
|----|--------------|-----------|--------------------|-----------------|
| 1 | MP3A | X | 2.626 | 2.5 |
| 2 | MP3A | Z | -4.549 | 2.5 |
| 3 | MP3A | Mx | -.001 | 2.5 |
| 4 | MP3A | X | 2.626 | 4.5 |
| 5 | MP3A | Z | -4.549 | 4.5 |
| 6 | MP3A | Mx | -.001 | 4.5 |
| 7 | MP3B | X | 1.213 | 2.5 |
| 8 | MP3B | Z | -2.1 | 2.5 |
| 9 | MP3B | Mx | .001 | 2.5 |
| 10 | MP3B | X | 1.213 | 4.5 |
| 11 | MP3B | Z | -2.1 | 4.5 |
| 12 | MP3B | Mx | .001 | 4.5 |
| 13 | MP3C | X | 2.626 | 2.5 |
| 14 | MP3C | Z | -4.549 | 2.5 |
| 15 | MP3C | Mx | -.001 | 2.5 |
| 16 | MP3C | X | 2.626 | 4.5 |
| 17 | MP3C | Z | -4.549 | 4.5 |
| 18 | MP3C | Mx | -.001 | 4.5 |
| 19 | MP2A | X | .45 | 2 |
| 20 | MP2A | Z | -.78 | 2 |
| 21 | MP2A | Mx | .000225 | 2 |
| 22 | MP2B | X | .337 | 2 |
| 23 | MP2B | Z | -.584 | 2 |
| 24 | MP2B | Mx | -.000337 | 2 |
| 25 | MP2C | X | .45 | 2 |
| 26 | MP2C | Z | -.78 | 2 |
| 27 | MP2C | Mx | .000225 | 2 |
| 28 | MP2A | X | 2.261 | 3.5 |
| 29 | MP2A | Z | -3.915 | 3.5 |
| 30 | MP2A | Mx | .001 | 3.5 |
| 31 | MP2B | X | 1.648 | 3.5 |
| 32 | MP2B | Z | -2.854 | 3.5 |
| 33 | MP2B | Mx | -.002 | 3.5 |
| 34 | MP2C | X | 2.261 | 3.5 |
| 35 | MP2C | Z | -3.915 | 3.5 |
| 36 | MP2C | Mx | .001 | 3.5 |
| 37 | MP3A | X | 2.182 | 3.5 |
| 38 | MP3A | Z | -3.78 | 3.5 |
| 39 | MP3A | Mx | .001 | 3.5 |
| 40 | MP3B | X | 1.335 | 3.5 |
| 41 | MP3B | Z | -2.312 | 3.5 |
| 42 | MP3B | Mx | -.001 | 3.5 |
| 43 | MP3C | X | 2.182 | 3.5 |
| 44 | MP3C | Z | -3.78 | 3.5 |

Member Point Loads (BLC 28 : Antenna Wm (30 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 45 | MP3C | Mx | .001 | 3.5 |
| 46 | MP2A | X | 5.489 | 1.5 |
| 47 | MP2A | Z | -9.507 | 1.5 |
| 48 | MP2A | Mx | -.008 | 1.5 |
| 49 | MP2A | X | 5.489 | 5.5 |
| 50 | MP2A | Z | -9.507 | 5.5 |
| 51 | MP2A | Mx | -.008 | 5.5 |
| 52 | MP2B | X | 3.943 | 1.5 |
| 53 | MP2B | Z | -6.83 | 1.5 |
| 54 | MP2B | Mx | -.004 | 1.5 |
| 55 | MP2B | X | 3.943 | 5.5 |
| 56 | MP2B | Z | -6.83 | 5.5 |
| 57 | MP2B | Mx | -.004 | 5.5 |
| 58 | MP2C | X | 3.943 | 1.5 |
| 59 | MP2C | Z | -6.83 | 1.5 |
| 60 | MP2C | Mx | .004 | 1.5 |
| 61 | MP2C | X | 3.943 | 5.5 |
| 62 | MP2C | Z | -6.83 | 5.5 |
| 63 | MP2C | Mx | .004 | 5.5 |
| 64 | MP2A | X | 5.489 | 1.5 |
| 65 | MP2A | Z | -9.507 | 1.5 |
| 66 | MP2A | Mx | .003 | 1.5 |
| 67 | MP2A | X | 5.489 | 5.5 |
| 68 | MP2A | Z | -9.507 | 5.5 |
| 69 | MP2A | Mx | .003 | 5.5 |
| 70 | MP2B | X | 3.943 | 1.5 |
| 71 | MP2B | Z | -6.83 | 1.5 |
| 72 | MP2B | Mx | -.004 | 1.5 |
| 73 | MP2B | X | 3.943 | 5.5 |
| 74 | MP2B | Z | -6.83 | 5.5 |
| 75 | MP2B | Mx | -.004 | 5.5 |
| 76 | MP2C | X | 5.489 | 1.5 |
| 77 | MP2C | Z | -9.507 | 1.5 |
| 78 | MP2C | Mx | -.008 | 1.5 |
| 79 | MP2C | X | 5.489 | 5.5 |
| 80 | MP2C | Z | -9.507 | 5.5 |
| 81 | MP2C | Mx | -.008 | 5.5 |
| 82 | MP1A | X | 6.158 | 1.5 |
| 83 | MP1A | Z | -10.666 | 1.5 |
| 84 | MP1A | Mx | -.003 | 1.5 |
| 85 | MP1A | X | 6.158 | 5.5 |
| 86 | MP1A | Z | -10.666 | 5.5 |
| 87 | MP1A | Mx | -.003 | 5.5 |
| 88 | MP1B | X | 5.651 | 1.5 |
| 89 | MP1B | Z | -9.788 | 1.5 |
| 90 | MP1B | Mx | .006 | 1.5 |
| 91 | MP1B | X | 5.651 | 5.5 |
| 92 | MP1B | Z | -9.788 | 5.5 |
| 93 | MP1B | Mx | .006 | 5.5 |
| 94 | MP1C | X | 6.158 | 1.5 |
| 95 | MP1C | Z | -10.666 | 1.5 |
| 96 | MP1C | Mx | -.003 | 1.5 |
| 97 | MP1C | X | 6.158 | 5.5 |
| 98 | MP1C | Z | -10.666 | 5.5 |
| 99 | MP1C | Mx | -.003 | 5.5 |
| 100 | MP4A | X | 6.158 | 1.5 |
| 101 | MP4A | Z | -10.666 | 1.5 |

Member Point Loads (BLC 28 : Antenna Wm (30 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 102 | MP4A | Mx | -.003 | 1.5 |
| 103 | MP4A | X | 6.158 | 5.5 |
| 104 | MP4A | Z | -10.666 | 5.5 |
| 105 | MP4A | Mx | -.003 | 5.5 |
| 106 | MP4B | X | 5.651 | 1.5 |
| 107 | MP4B | Z | -9.788 | 1.5 |
| 108 | MP4B | Mx | .006 | 1.5 |
| 109 | MP4B | X | 5.651 | 5.5 |
| 110 | MP4B | Z | -9.788 | 5.5 |
| 111 | MP4B | Mx | .006 | 5.5 |
| 112 | MP4C | X | 6.158 | 1.5 |
| 113 | MP4C | Z | -10.666 | 1.5 |
| 114 | MP4C | Mx | -.003 | 1.5 |
| 115 | MP4C | X | 6.158 | 5.5 |
| 116 | MP4C | Z | -10.666 | 5.5 |
| 117 | MP4C | Mx | -.003 | 5.5 |

Member Point Loads (BLC 29 : Antenna Wm (60 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 2.917 | 2.5 |
| 2 | MP3A | Z | -1.684 | 2.5 |
| 3 | MP3A | Mx | -.001 | 2.5 |
| 4 | MP3A | X | 2.917 | 4.5 |
| 5 | MP3A | Z | -1.684 | 4.5 |
| 6 | MP3A | Mx | -.001 | 4.5 |
| 7 | MP3B | X | 2.917 | 2.5 |
| 8 | MP3B | Z | -1.684 | 2.5 |
| 9 | MP3B | Mx | .001 | 2.5 |
| 10 | MP3B | X | 2.917 | 4.5 |
| 11 | MP3B | Z | -1.684 | 4.5 |
| 12 | MP3B | Mx | .001 | 4.5 |
| 13 | MP3C | X | 5.365 | 2.5 |
| 14 | MP3C | Z | -3.098 | 2.5 |
| 15 | MP3C | Mx | 0 | 2.5 |
| 16 | MP3C | X | 5.365 | 4.5 |
| 17 | MP3C | Z | -3.098 | 4.5 |
| 18 | MP3C | Mx | 0 | 4.5 |
| 19 | MP2A | X | .65 | 2 |
| 20 | MP2A | Z | -.375 | 2 |
| 21 | MP2A | Mx | .000325 | 2 |
| 22 | MP2B | X | .65 | 2 |
| 23 | MP2B | Z | -.375 | 2 |
| 24 | MP2B | Mx | -.000325 | 2 |
| 25 | MP2C | X | .845 | 2 |
| 26 | MP2C | Z | -.488 | 2 |
| 27 | MP2C | Mx | 0 | 2 |
| 28 | MP2A | X | 3.208 | 3.5 |
| 29 | MP2A | Z | -1.852 | 3.5 |
| 30 | MP2A | Mx | .002 | 3.5 |
| 31 | MP2B | X | 3.208 | 3.5 |
| 32 | MP2B | Z | -1.852 | 3.5 |
| 33 | MP2B | Mx | -.002 | 3.5 |
| 34 | MP2C | X | 4.269 | 3.5 |
| 35 | MP2C | Z | -2.465 | 3.5 |
| 36 | MP2C | Mx | 0 | 3.5 |
| 37 | MP3A | X | 2.801 | 3.5 |

Member Point Loads (BLC 29 : Antenna Wm (60 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft,%] |
|----|--------------|-----------|--------------------|----------------|
| 38 | MP3A | Z | -1.617 | 3.5 |
| 39 | MP3A | Mx | .001 | 3.5 |
| 40 | MP3B | X | 2.801 | 3.5 |
| 41 | MP3B | Z | -1.617 | 3.5 |
| 42 | MP3B | Mx | -.001 | 3.5 |
| 43 | MP3C | X | 4.269 | 3.5 |
| 44 | MP3C | Z | -2.465 | 3.5 |
| 45 | MP3C | Mx | 0 | 3.5 |
| 46 | MP2A | X | 7.722 | 1.5 |
| 47 | MP2A | Z | -4.458 | 1.5 |
| 48 | MP2A | Mx | -.006 | 1.5 |
| 49 | MP2A | X | 7.722 | 5.5 |
| 50 | MP2A | Z | -4.458 | 5.5 |
| 51 | MP2A | Mx | -.006 | 5.5 |
| 52 | MP2B | X | 7.722 | 1.5 |
| 53 | MP2B | Z | -4.458 | 1.5 |
| 54 | MP2B | Mx | -.001 | 1.5 |
| 55 | MP2B | X | 7.722 | 5.5 |
| 56 | MP2B | Z | -4.458 | 5.5 |
| 57 | MP2B | Mx | -.001 | 5.5 |
| 58 | MP2C | X | 7.722 | 1.5 |
| 59 | MP2C | Z | -4.458 | 1.5 |
| 60 | MP2C | Mx | .001 | 1.5 |
| 61 | MP2C | X | 7.722 | 5.5 |
| 62 | MP2C | Z | -4.458 | 5.5 |
| 63 | MP2C | Mx | .001 | 5.5 |
| 64 | MP2A | X | 7.722 | 1.5 |
| 65 | MP2A | Z | -4.458 | 1.5 |
| 66 | MP2A | Mx | -.001 | 1.5 |
| 67 | MP2A | X | 7.722 | 5.5 |
| 68 | MP2A | Z | -4.458 | 5.5 |
| 69 | MP2A | Mx | -.001 | 5.5 |
| 70 | MP2B | X | 7.722 | 1.5 |
| 71 | MP2B | Z | -4.458 | 1.5 |
| 72 | MP2B | Mx | -.006 | 1.5 |
| 73 | MP2B | X | 7.722 | 5.5 |
| 74 | MP2B | Z | -4.458 | 5.5 |
| 75 | MP2B | Mx | -.006 | 5.5 |
| 76 | MP2C | X | 10.399 | 1.5 |
| 77 | MP2C | Z | -6.004 | 1.5 |
| 78 | MP2C | Mx | -.007 | 1.5 |
| 79 | MP2C | X | 10.399 | 5.5 |
| 80 | MP2C | Z | -6.004 | 5.5 |
| 81 | MP2C | Mx | -.007 | 5.5 |
| 82 | MP1A | X | 10.081 | 1.5 |
| 83 | MP1A | Z | -5.82 | 1.5 |
| 84 | MP1A | Mx | -.005 | 1.5 |
| 85 | MP1A | X | 10.081 | 5.5 |
| 86 | MP1A | Z | -5.82 | 5.5 |
| 87 | MP1A | Mx | -.005 | 5.5 |
| 88 | MP1B | X | 10.081 | 1.5 |
| 89 | MP1B | Z | -5.82 | 1.5 |
| 90 | MP1B | Mx | .005 | 1.5 |
| 91 | MP1B | X | 10.081 | 5.5 |
| 92 | MP1B | Z | -5.82 | 5.5 |
| 93 | MP1B | Mx | .005 | 5.5 |
| 94 | MP1C | X | 10.958 | 1.5 |

Member Point Loads (BLC 29 : Antenna Wm (60 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 95 | MP1C | Z | -6.327 | 1.5 |
| 96 | MP1C | Mx | 0 | 1.5 |
| 97 | MP1C | X | 10.958 | 5.5 |
| 98 | MP1C | Z | -6.327 | 5.5 |
| 99 | MP1C | Mx | 0 | 5.5 |
| 100 | MP4A | X | 10.081 | 1.5 |
| 101 | MP4A | Z | -5.82 | 1.5 |
| 102 | MP4A | Mx | -.005 | 1.5 |
| 103 | MP4A | X | 10.081 | 5.5 |
| 104 | MP4A | Z | -5.82 | 5.5 |
| 105 | MP4A | Mx | -.005 | 5.5 |
| 106 | MP4B | X | 10.081 | 1.5 |
| 107 | MP4B | Z | -5.82 | 1.5 |
| 108 | MP4B | Mx | .005 | 1.5 |
| 109 | MP4B | X | 10.081 | 5.5 |
| 110 | MP4B | Z | -5.82 | 5.5 |
| 111 | MP4B | Mx | .005 | 5.5 |
| 112 | MP4C | X | 10.958 | 1.5 |
| 113 | MP4C | Z | -6.327 | 1.5 |
| 114 | MP4C | Mx | 0 | 1.5 |
| 115 | MP4C | X | 10.958 | 5.5 |
| 116 | MP4C | Z | -6.327 | 5.5 |
| 117 | MP4C | Mx | 0 | 5.5 |

Member Point Loads (BLC 30 : Antenna Wm (90 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 2.425 | 2.5 |
| 2 | MP3A | Z | 0 | 2.5 |
| 3 | MP3A | Mx | -.001 | 2.5 |
| 4 | MP3A | X | 2.425 | 4.5 |
| 5 | MP3A | Z | 0 | 4.5 |
| 6 | MP3A | Mx | -.001 | 4.5 |
| 7 | MP3B | X | 5.253 | 2.5 |
| 8 | MP3B | Z | 0 | 2.5 |
| 9 | MP3B | Mx | .001 | 2.5 |
| 10 | MP3B | X | 5.253 | 4.5 |
| 11 | MP3B | Z | 0 | 4.5 |
| 12 | MP3B | Mx | .001 | 4.5 |
| 13 | MP3C | X | 5.253 | 2.5 |
| 14 | MP3C | Z | 0 | 2.5 |
| 15 | MP3C | Mx | .001 | 2.5 |
| 16 | MP3C | X | 5.253 | 4.5 |
| 17 | MP3C | Z | 0 | 4.5 |
| 18 | MP3C | Mx | .001 | 4.5 |
| 19 | MP2A | X | .675 | 2 |
| 20 | MP2A | Z | 0 | 2 |
| 21 | MP2A | Mx | .000338 | 2 |
| 22 | MP2B | X | .9 | 2 |
| 23 | MP2B | Z | 0 | 2 |
| 24 | MP2B | Mx | -.000225 | 2 |
| 25 | MP2C | X | .9 | 2 |
| 26 | MP2C | Z | 0 | 2 |
| 27 | MP2C | Mx | -.000225 | 2 |
| 28 | MP2A | X | 3.295 | 3.5 |
| 29 | MP2A | Z | 0 | 3.5 |
| 30 | MP2A | Mx | .002 | 3.5 |

Member Point Loads (BLC 30 : Antenna Wm (90 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 31 | MP2B | X | 4.521 | 3.5 |
| 32 | MP2B | Z | 0 | 3.5 |
| 33 | MP2B | Mx | -.001 | 3.5 |
| 34 | MP2C | X | 4.521 | 3.5 |
| 35 | MP2C | Z | 0 | 3.5 |
| 36 | MP2C | Mx | -.001 | 3.5 |
| 37 | MP3A | X | 2.669 | 3.5 |
| 38 | MP3A | Z | 0 | 3.5 |
| 39 | MP3A | Mx | .001 | 3.5 |
| 40 | MP3B | X | 4.365 | 3.5 |
| 41 | MP3B | Z | 0 | 3.5 |
| 42 | MP3B | Mx | -.001 | 3.5 |
| 43 | MP3C | X | 4.365 | 3.5 |
| 44 | MP3C | Z | 0 | 3.5 |
| 45 | MP3C | Mx | -.001 | 3.5 |
| 46 | MP2A | X | 7.887 | 1.5 |
| 47 | MP2A | Z | 0 | 1.5 |
| 48 | MP2A | Mx | -.004 | 1.5 |
| 49 | MP2A | X | 7.887 | 5.5 |
| 50 | MP2A | Z | 0 | 5.5 |
| 51 | MP2A | Mx | -.004 | 5.5 |
| 52 | MP2B | X | 10.978 | 1.5 |
| 53 | MP2B | Z | 0 | 1.5 |
| 54 | MP2B | Mx | .003 | 1.5 |
| 55 | MP2B | X | 10.978 | 5.5 |
| 56 | MP2B | Z | 0 | 5.5 |
| 57 | MP2B | Mx | .003 | 5.5 |
| 58 | MP2C | X | 10.978 | 1.5 |
| 59 | MP2C | Z | 0 | 1.5 |
| 60 | MP2C | Mx | -.003 | 1.5 |
| 61 | MP2C | X | 10.978 | 5.5 |
| 62 | MP2C | Z | 0 | 5.5 |
| 63 | MP2C | Mx | -.003 | 5.5 |
| 64 | MP2A | X | 7.887 | 1.5 |
| 65 | MP2A | Z | 0 | 1.5 |
| 66 | MP2A | Mx | -.004 | 1.5 |
| 67 | MP2A | X | 7.887 | 5.5 |
| 68 | MP2A | Z | 0 | 5.5 |
| 69 | MP2A | Mx | -.004 | 5.5 |
| 70 | MP2B | X | 10.978 | 1.5 |
| 71 | MP2B | Z | 0 | 1.5 |
| 72 | MP2B | Mx | -.008 | 1.5 |
| 73 | MP2B | X | 10.978 | 5.5 |
| 74 | MP2B | Z | 0 | 5.5 |
| 75 | MP2B | Mx | -.008 | 5.5 |
| 76 | MP2C | X | 10.978 | 1.5 |
| 77 | MP2C | Z | 0 | 1.5 |
| 78 | MP2C | Mx | -.003 | 1.5 |
| 79 | MP2C | X | 10.978 | 5.5 |
| 80 | MP2C | Z | 0 | 5.5 |
| 81 | MP2C | Mx | -.003 | 5.5 |
| 82 | MP1A | X | 11.302 | 1.5 |
| 83 | MP1A | Z | 0 | 1.5 |
| 84 | MP1A | Mx | -.006 | 1.5 |
| 85 | MP1A | X | 11.302 | 5.5 |
| 86 | MP1A | Z | 0 | 5.5 |
| 87 | MP1A | Mx | -.006 | 5.5 |

Member Point Loads (BLC 30 : Antenna Wm (90 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 88 | MP1B | X | 12.316 | 1.5 |
| 89 | MP1B | Z | 0 | 1.5 |
| 90 | MP1B | Mx | .003 | 1.5 |
| 91 | MP1B | X | 12.316 | 5.5 |
| 92 | MP1B | Z | 0 | 5.5 |
| 93 | MP1B | Mx | .003 | 5.5 |
| 94 | MP1C | X | 12.316 | 1.5 |
| 95 | MP1C | Z | 0 | 1.5 |
| 96 | MP1C | Mx | .003 | 1.5 |
| 97 | MP1C | X | 12.316 | 5.5 |
| 98 | MP1C | Z | 0 | 5.5 |
| 99 | MP1C | Mx | .003 | 5.5 |
| 100 | MP4A | X | 11.302 | 1.5 |
| 101 | MP4A | Z | 0 | 1.5 |
| 102 | MP4A | Mx | -.006 | 1.5 |
| 103 | MP4A | X | 11.302 | 5.5 |
| 104 | MP4A | Z | 0 | 5.5 |
| 105 | MP4A | Mx | -.006 | 5.5 |
| 106 | MP4B | X | 12.316 | 1.5 |
| 107 | MP4B | Z | 0 | 1.5 |
| 108 | MP4B | Mx | .003 | 1.5 |
| 109 | MP4B | X | 12.316 | 5.5 |
| 110 | MP4B | Z | 0 | 5.5 |
| 111 | MP4B | Mx | .003 | 5.5 |
| 112 | MP4C | X | 12.316 | 1.5 |
| 113 | MP4C | Z | 0 | 1.5 |
| 114 | MP4C | Mx | .003 | 1.5 |
| 115 | MP4C | X | 12.316 | 5.5 |
| 116 | MP4C | Z | 0 | 5.5 |
| 117 | MP4C | Mx | .003 | 5.5 |

Member Point Loads (BLC 31 : Antenna Wm (120 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 2.917 | 2.5 |
| 2 | MP3A | Z | 1.684 | 2.5 |
| 3 | MP3A | Mx | -.001 | 2.5 |
| 4 | MP3A | X | 2.917 | 4.5 |
| 5 | MP3A | Z | 1.684 | 4.5 |
| 6 | MP3A | Mx | -.001 | 4.5 |
| 7 | MP3B | X | 5.365 | 2.5 |
| 8 | MP3B | Z | 3.098 | 2.5 |
| 9 | MP3B | Mx | 0 | 2.5 |
| 10 | MP3B | X | 5.365 | 4.5 |
| 11 | MP3B | Z | 3.098 | 4.5 |
| 12 | MP3B | Mx | 0 | 4.5 |
| 13 | MP3C | X | 2.917 | 2.5 |
| 14 | MP3C | Z | 1.684 | 2.5 |
| 15 | MP3C | Mx | .001 | 2.5 |
| 16 | MP3C | X | 2.917 | 4.5 |
| 17 | MP3C | Z | 1.684 | 4.5 |
| 18 | MP3C | Mx | .001 | 4.5 |
| 19 | MP2A | X | .65 | 2 |
| 20 | MP2A | Z | .375 | 2 |
| 21 | MP2A | Mx | .000325 | 2 |
| 22 | MP2B | X | .845 | 2 |
| 23 | MP2B | Z | .488 | 2 |

Member Point Loads (BLC 31 : Antenna Wm (120 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 24 | MP2B | Mx | 0 | 2 |
| 25 | MP2C | X | .65 | 2 |
| 26 | MP2C | Z | .375 | 2 |
| 27 | MP2C | Mx | -.000325 | 2 |
| 28 | MP2A | X | 3.208 | 3.5 |
| 29 | MP2A | Z | 1.852 | 3.5 |
| 30 | MP2A | Mx | .002 | 3.5 |
| 31 | MP2B | X | 4.269 | 3.5 |
| 32 | MP2B | Z | 2.465 | 3.5 |
| 33 | MP2B | Mx | 0 | 3.5 |
| 34 | MP2C | X | 3.208 | 3.5 |
| 35 | MP2C | Z | 1.852 | 3.5 |
| 36 | MP2C | Mx | -.002 | 3.5 |
| 37 | MP3A | X | 2.801 | 3.5 |
| 38 | MP3A | Z | 1.617 | 3.5 |
| 39 | MP3A | Mx | .001 | 3.5 |
| 40 | MP3B | X | 4.269 | 3.5 |
| 41 | MP3B | Z | 2.465 | 3.5 |
| 42 | MP3B | Mx | 0 | 3.5 |
| 43 | MP3C | X | 2.801 | 3.5 |
| 44 | MP3C | Z | 1.617 | 3.5 |
| 45 | MP3C | Mx | -.001 | 3.5 |
| 46 | MP2A | X | 7.722 | 1.5 |
| 47 | MP2A | Z | 4.458 | 1.5 |
| 48 | MP2A | Mx | -.001 | 1.5 |
| 49 | MP2A | X | 7.722 | 5.5 |
| 50 | MP2A | Z | 4.458 | 5.5 |
| 51 | MP2A | Mx | -.001 | 5.5 |
| 52 | MP2B | X | 10.399 | 1.5 |
| 53 | MP2B | Z | 6.004 | 1.5 |
| 54 | MP2B | Mx | .007 | 1.5 |
| 55 | MP2B | X | 10.399 | 5.5 |
| 56 | MP2B | Z | 6.004 | 5.5 |
| 57 | MP2B | Mx | .007 | 5.5 |
| 58 | MP2C | X | 10.399 | 1.5 |
| 59 | MP2C | Z | 6.004 | 1.5 |
| 60 | MP2C | Mx | -.007 | 1.5 |
| 61 | MP2C | X | 10.399 | 5.5 |
| 62 | MP2C | Z | 6.004 | 5.5 |
| 63 | MP2C | Mx | -.007 | 5.5 |
| 64 | MP2A | X | 7.722 | 1.5 |
| 65 | MP2A | Z | 4.458 | 1.5 |
| 66 | MP2A | Mx | -.006 | 1.5 |
| 67 | MP2A | X | 7.722 | 5.5 |
| 68 | MP2A | Z | 4.458 | 5.5 |
| 69 | MP2A | Mx | -.006 | 5.5 |
| 70 | MP2B | X | 10.399 | 1.5 |
| 71 | MP2B | Z | 6.004 | 1.5 |
| 72 | MP2B | Mx | -.007 | 1.5 |
| 73 | MP2B | X | 10.399 | 5.5 |
| 74 | MP2B | Z | 6.004 | 5.5 |
| 75 | MP2B | Mx | -.007 | 5.5 |
| 76 | MP2C | X | 7.722 | 1.5 |
| 77 | MP2C | Z | 4.458 | 1.5 |
| 78 | MP2C | Mx | .001 | 1.5 |
| 79 | MP2C | X | 7.722 | 5.5 |
| 80 | MP2C | Z | 4.458 | 5.5 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Point Loads (BLC 31 : Antenna Wm (120 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 81 | MP2C | Mx | .001 | 5.5 |
| 82 | MP1A | X | 10.081 | 1.5 |
| 83 | MP1A | Z | 5.82 | 1.5 |
| 84 | MP1A | Mx | -.005 | 1.5 |
| 85 | MP1A | X | 10.081 | 5.5 |
| 86 | MP1A | Z | 5.82 | 5.5 |
| 87 | MP1A | Mx | -.005 | 5.5 |
| 88 | MP1B | X | 10.958 | 1.5 |
| 89 | MP1B | Z | 6.327 | 1.5 |
| 90 | MP1B | Mx | 0 | 1.5 |
| 91 | MP1B | X | 10.958 | 5.5 |
| 92 | MP1B | Z | 6.327 | 5.5 |
| 93 | MP1B | Mx | 0 | 5.5 |
| 94 | MP1C | X | 10.081 | 1.5 |
| 95 | MP1C | Z | 5.82 | 1.5 |
| 96 | MP1C | Mx | .005 | 1.5 |
| 97 | MP1C | X | 10.081 | 5.5 |
| 98 | MP1C | Z | 5.82 | 5.5 |
| 99 | MP1C | Mx | .005 | 5.5 |
| 100 | MP4A | X | 10.081 | 1.5 |
| 101 | MP4A | Z | 5.82 | 1.5 |
| 102 | MP4A | Mx | -.005 | 1.5 |
| 103 | MP4A | X | 10.081 | 5.5 |
| 104 | MP4A | Z | 5.82 | 5.5 |
| 105 | MP4A | Mx | -.005 | 5.5 |
| 106 | MP4B | X | 10.958 | 1.5 |
| 107 | MP4B | Z | 6.327 | 1.5 |
| 108 | MP4B | Mx | 0 | 1.5 |
| 109 | MP4B | X | 10.958 | 5.5 |
| 110 | MP4B | Z | 6.327 | 5.5 |
| 111 | MP4B | Mx | 0 | 5.5 |
| 112 | MP4C | X | 10.081 | 1.5 |
| 113 | MP4C | Z | 5.82 | 1.5 |
| 114 | MP4C | Mx | .005 | 1.5 |
| 115 | MP4C | X | 10.081 | 5.5 |
| 116 | MP4C | Z | 5.82 | 5.5 |
| 117 | MP4C | Mx | .005 | 5.5 |

Member Point Loads (BLC 32 : Antenna Wm (150 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 2.626 | 2.5 |
| 2 | MP3A | Z | 4.549 | 2.5 |
| 3 | MP3A | Mx | -.001 | 2.5 |
| 4 | MP3A | X | 2.626 | 4.5 |
| 5 | MP3A | Z | 4.549 | 4.5 |
| 6 | MP3A | Mx | -.001 | 4.5 |
| 7 | MP3B | X | 2.626 | 2.5 |
| 8 | MP3B | Z | 4.549 | 2.5 |
| 9 | MP3B | Mx | -.001 | 2.5 |
| 10 | MP3B | X | 2.626 | 4.5 |
| 11 | MP3B | Z | 4.549 | 4.5 |
| 12 | MP3B | Mx | -.001 | 4.5 |
| 13 | MP3C | X | 1.213 | 2.5 |
| 14 | MP3C | Z | 2.1 | 2.5 |
| 15 | MP3C | Mx | .001 | 2.5 |
| 16 | MP3C | X | 1.213 | 4.5 |

Member Point Loads (BLC 32 : Antenna Wm (150 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 17 | MP3C | Z | 2.1 | 4.5 |
| 18 | MP3C | Mx | .001 | 4.5 |
| 19 | MP2A | X | .45 | 2 |
| 20 | MP2A | Z | .78 | 2 |
| 21 | MP2A | Mx | .000225 | 2 |
| 22 | MP2B | X | .45 | 2 |
| 23 | MP2B | Z | .78 | 2 |
| 24 | MP2B | Mx | .000225 | 2 |
| 25 | MP2C | X | .337 | 2 |
| 26 | MP2C | Z | .584 | 2 |
| 27 | MP2C | Mx | -.000337 | 2 |
| 28 | MP2A | X | 2.261 | 3.5 |
| 29 | MP2A | Z | 3.915 | 3.5 |
| 30 | MP2A | Mx | .001 | 3.5 |
| 31 | MP2B | X | 2.261 | 3.5 |
| 32 | MP2B | Z | 3.915 | 3.5 |
| 33 | MP2B | Mx | .001 | 3.5 |
| 34 | MP2C | X | 1.648 | 3.5 |
| 35 | MP2C | Z | 2.854 | 3.5 |
| 36 | MP2C | Mx | -.002 | 3.5 |
| 37 | MP3A | X | 2.182 | 3.5 |
| 38 | MP3A | Z | 3.78 | 3.5 |
| 39 | MP3A | Mx | .001 | 3.5 |
| 40 | MP3B | X | 2.182 | 3.5 |
| 41 | MP3B | Z | 3.78 | 3.5 |
| 42 | MP3B | Mx | .001 | 3.5 |
| 43 | MP3C | X | 1.335 | 3.5 |
| 44 | MP3C | Z | 2.312 | 3.5 |
| 45 | MP3C | Mx | -.001 | 3.5 |
| 46 | MP2A | X | 5.489 | 1.5 |
| 47 | MP2A | Z | 9.507 | 1.5 |
| 48 | MP2A | Mx | .003 | 1.5 |
| 49 | MP2A | X | 5.489 | 5.5 |
| 50 | MP2A | Z | 9.507 | 5.5 |
| 51 | MP2A | Mx | .003 | 5.5 |
| 52 | MP2B | X | 5.489 | 1.5 |
| 53 | MP2B | Z | 9.507 | 1.5 |
| 54 | MP2B | Mx | .008 | 1.5 |
| 55 | MP2B | X | 5.489 | 5.5 |
| 56 | MP2B | Z | 9.507 | 5.5 |
| 57 | MP2B | Mx | .008 | 5.5 |
| 58 | MP2C | X | 5.489 | 1.5 |
| 59 | MP2C | Z | 9.507 | 1.5 |
| 60 | MP2C | Mx | -.008 | 1.5 |
| 61 | MP2C | X | 5.489 | 5.5 |
| 62 | MP2C | Z | 9.507 | 5.5 |
| 63 | MP2C | Mx | -.008 | 5.5 |
| 64 | MP2A | X | 5.489 | 1.5 |
| 65 | MP2A | Z | 9.507 | 1.5 |
| 66 | MP2A | Mx | -.008 | 1.5 |
| 67 | MP2A | X | 5.489 | 5.5 |
| 68 | MP2A | Z | 9.507 | 5.5 |
| 69 | MP2A | Mx | -.008 | 5.5 |
| 70 | MP2B | X | 5.489 | 1.5 |
| 71 | MP2B | Z | 9.507 | 1.5 |
| 72 | MP2B | Mx | -.003 | 1.5 |
| 73 | MP2B | X | 5.489 | 5.5 |

Member Point Loads (BLC 32 : Antenna Wm (150 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 74 | MP2B | Z | 9.507 | 5.5 |
| 75 | MP2B | Mx | -.003 | 5.5 |
| 76 | MP2C | X | 3.943 | 1.5 |
| 77 | MP2C | Z | 6.83 | 1.5 |
| 78 | MP2C | Mx | .004 | 1.5 |
| 79 | MP2C | X | 3.943 | 5.5 |
| 80 | MP2C | Z | 6.83 | 5.5 |
| 81 | MP2C | Mx | .004 | 5.5 |
| 82 | MP1A | X | 6.158 | 1.5 |
| 83 | MP1A | Z | 10.666 | 1.5 |
| 84 | MP1A | Mx | -.003 | 1.5 |
| 85 | MP1A | X | 6.158 | 5.5 |
| 86 | MP1A | Z | 10.666 | 5.5 |
| 87 | MP1A | Mx | -.003 | 5.5 |
| 88 | MP1B | X | 6.158 | 1.5 |
| 89 | MP1B | Z | 10.666 | 1.5 |
| 90 | MP1B | Mx | -.003 | 1.5 |
| 91 | MP1B | X | 6.158 | 5.5 |
| 92 | MP1B | Z | 10.666 | 5.5 |
| 93 | MP1B | Mx | -.003 | 5.5 |
| 94 | MP1C | X | 5.651 | 1.5 |
| 95 | MP1C | Z | 9.788 | 1.5 |
| 96 | MP1C | Mx | .006 | 1.5 |
| 97 | MP1C | X | 5.651 | 5.5 |
| 98 | MP1C | Z | 9.788 | 5.5 |
| 99 | MP1C | Mx | .006 | 5.5 |
| 100 | MP4A | X | 6.158 | 1.5 |
| 101 | MP4A | Z | 10.666 | 1.5 |
| 102 | MP4A | Mx | -.003 | 1.5 |
| 103 | MP4A | X | 6.158 | 5.5 |
| 104 | MP4A | Z | 10.666 | 5.5 |
| 105 | MP4A | Mx | -.003 | 5.5 |
| 106 | MP4B | X | 6.158 | 1.5 |
| 107 | MP4B | Z | 10.666 | 1.5 |
| 108 | MP4B | Mx | -.003 | 1.5 |
| 109 | MP4B | X | 6.158 | 5.5 |
| 110 | MP4B | Z | 10.666 | 5.5 |
| 111 | MP4B | Mx | -.003 | 5.5 |
| 112 | MP4C | X | 5.651 | 1.5 |
| 113 | MP4C | Z | 9.788 | 1.5 |
| 114 | MP4C | Mx | .006 | 1.5 |
| 115 | MP4C | X | 5.651 | 5.5 |
| 116 | MP4C | Z | 9.788 | 5.5 |
| 117 | MP4C | Mx | .006 | 5.5 |

Member Point Loads (BLC 33 : Antenna Wm (180 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|---|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | 0 | 2.5 |
| 2 | MP3A | Z | 6.195 | 2.5 |
| 3 | MP3A | Mx | 0 | 2.5 |
| 4 | MP3A | X | 0 | 4.5 |
| 5 | MP3A | Z | 6.195 | 4.5 |
| 6 | MP3A | Mx | 0 | 4.5 |
| 7 | MP3B | X | 0 | 2.5 |
| 8 | MP3B | Z | 3.368 | 2.5 |
| 9 | MP3B | Mx | -.001 | 2.5 |

Member Point Loads (BLC 33 : Antenna Wm (180 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb,k-ft] | Location[ft,%] |
|----|--------------|-----------|--------------------|----------------|
| 10 | MP3B | X | 0 | 4.5 |
| 11 | MP3B | Z | 3.368 | 4.5 |
| 12 | MP3B | Mx | -.001 | 4.5 |
| 13 | MP3C | X | 0 | 2.5 |
| 14 | MP3C | Z | 3.368 | 2.5 |
| 15 | MP3C | Mx | .001 | 2.5 |
| 16 | MP3C | X | 0 | 4.5 |
| 17 | MP3C | Z | 3.368 | 4.5 |
| 18 | MP3C | Mx | .001 | 4.5 |
| 19 | MP2A | X | 0 | 2 |
| 20 | MP2A | Z | .975 | 2 |
| 21 | MP2A | Mx | 0 | 2 |
| 22 | MP2B | X | 0 | 2 |
| 23 | MP2B | Z | .75 | 2 |
| 24 | MP2B | Mx | .000325 | 2 |
| 25 | MP2C | X | 0 | 2 |
| 26 | MP2C | Z | .75 | 2 |
| 27 | MP2C | Mx | -.000325 | 2 |
| 28 | MP2A | X | 0 | 3.5 |
| 29 | MP2A | Z | 4.93 | 3.5 |
| 30 | MP2A | Mx | 0 | 3.5 |
| 31 | MP2B | X | 0 | 3.5 |
| 32 | MP2B | Z | 3.704 | 3.5 |
| 33 | MP2B | Mx | .002 | 3.5 |
| 34 | MP2C | X | 0 | 3.5 |
| 35 | MP2C | Z | 3.704 | 3.5 |
| 36 | MP2C | Mx | -.002 | 3.5 |
| 37 | MP3A | X | 0 | 3.5 |
| 38 | MP3A | Z | 4.93 | 3.5 |
| 39 | MP3A | Mx | 0 | 3.5 |
| 40 | MP3B | X | 0 | 3.5 |
| 41 | MP3B | Z | 3.234 | 3.5 |
| 42 | MP3B | Mx | .001 | 3.5 |
| 43 | MP3C | X | 0 | 3.5 |
| 44 | MP3C | Z | 3.234 | 3.5 |
| 45 | MP3C | Mx | -.001 | 3.5 |
| 46 | MP2A | X | 0 | 1.5 |
| 47 | MP2A | Z | 12.008 | 1.5 |
| 48 | MP2A | Mx | .007 | 1.5 |
| 49 | MP2A | X | 0 | 5.5 |
| 50 | MP2A | Z | 12.008 | 5.5 |
| 51 | MP2A | Mx | .007 | 5.5 |
| 52 | MP2B | X | 0 | 1.5 |
| 53 | MP2B | Z | 8.917 | 1.5 |
| 54 | MP2B | Mx | .006 | 1.5 |
| 55 | MP2B | X | 0 | 5.5 |
| 56 | MP2B | Z | 8.917 | 5.5 |
| 57 | MP2B | Mx | .006 | 5.5 |
| 58 | MP2C | X | 0 | 1.5 |
| 59 | MP2C | Z | 8.917 | 1.5 |
| 60 | MP2C | Mx | -.006 | 1.5 |
| 61 | MP2C | X | 0 | 5.5 |
| 62 | MP2C | Z | 8.917 | 5.5 |
| 63 | MP2C | Mx | -.006 | 5.5 |
| 64 | MP2A | X | 0 | 1.5 |
| 65 | MP2A | Z | 12.008 | 1.5 |
| 66 | MP2A | Mx | -.007 | 1.5 |

Member Point Loads (BLC 33 : Antenna Wm (180 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 67 | MP2A | X | 0 | 5.5 |
| 68 | MP2A | Z | 12.008 | 5.5 |
| 69 | MP2A | Mx | -.007 | 5.5 |
| 70 | MP2B | X | 0 | 1.5 |
| 71 | MP2B | Z | 8.917 | 1.5 |
| 72 | MP2B | Mx | .001 | 1.5 |
| 73 | MP2B | X | 0 | 5.5 |
| 74 | MP2B | Z | 8.917 | 5.5 |
| 75 | MP2B | Mx | .001 | 5.5 |
| 76 | MP2C | X | 0 | 1.5 |
| 77 | MP2C | Z | 8.917 | 1.5 |
| 78 | MP2C | Mx | .006 | 1.5 |
| 79 | MP2C | X | 0 | 5.5 |
| 80 | MP2C | Z | 8.917 | 5.5 |
| 81 | MP2C | Mx | .006 | 5.5 |
| 82 | MP1A | X | 0 | 1.5 |
| 83 | MP1A | Z | 12.654 | 1.5 |
| 84 | MP1A | Mx | 0 | 1.5 |
| 85 | MP1A | X | 0 | 5.5 |
| 86 | MP1A | Z | 12.654 | 5.5 |
| 87 | MP1A | Mx | 0 | 5.5 |
| 88 | MP1B | X | 0 | 1.5 |
| 89 | MP1B | Z | 11.64 | 1.5 |
| 90 | MP1B | Mx | -.005 | 1.5 |
| 91 | MP1B | X | 0 | 5.5 |
| 92 | MP1B | Z | 11.64 | 5.5 |
| 93 | MP1B | Mx | -.005 | 5.5 |
| 94 | MP1C | X | 0 | 1.5 |
| 95 | MP1C | Z | 11.64 | 1.5 |
| 96 | MP1C | Mx | .005 | 1.5 |
| 97 | MP1C | X | 0 | 5.5 |
| 98 | MP1C | Z | 11.64 | 5.5 |
| 99 | MP1C | Mx | .005 | 5.5 |
| 100 | MP4A | X | 0 | 1.5 |
| 101 | MP4A | Z | 12.654 | 1.5 |
| 102 | MP4A | Mx | 0 | 1.5 |
| 103 | MP4A | X | 0 | 5.5 |
| 104 | MP4A | Z | 12.654 | 5.5 |
| 105 | MP4A | Mx | 0 | 5.5 |
| 106 | MP4B | X | 0 | 1.5 |
| 107 | MP4B | Z | 11.64 | 1.5 |
| 108 | MP4B | Mx | -.005 | 1.5 |
| 109 | MP4B | X | 0 | 5.5 |
| 110 | MP4B | Z | 11.64 | 5.5 |
| 111 | MP4B | Mx | -.005 | 5.5 |
| 112 | MP4C | X | 0 | 1.5 |
| 113 | MP4C | Z | 11.64 | 1.5 |
| 114 | MP4C | Mx | .005 | 1.5 |
| 115 | MP4C | X | 0 | 5.5 |
| 116 | MP4C | Z | 11.64 | 5.5 |
| 117 | MP4C | Mx | .005 | 5.5 |

Member Point Loads (BLC 34 : Antenna Wm (210 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|---|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | -2.626 | 2.5 |
| 2 | MP3A | Z | 4.549 | 2.5 |

Member Point Loads (BLC 34 : Antenna Wm (210 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 3 | MP3A | Mx | .001 | 2.5 |
| 4 | MP3A | X | -2.626 | 4.5 |
| 5 | MP3A | Z | 4.549 | 4.5 |
| 6 | MP3A | Mx | .001 | 4.5 |
| 7 | MP3B | X | -1.213 | 2.5 |
| 8 | MP3B | Z | 2.1 | 2.5 |
| 9 | MP3B | Mx | -.001 | 2.5 |
| 10 | MP3B | X | -1.213 | 4.5 |
| 11 | MP3B | Z | 2.1 | 4.5 |
| 12 | MP3B | Mx | -.001 | 4.5 |
| 13 | MP3C | X | -2.626 | 2.5 |
| 14 | MP3C | Z | 4.549 | 2.5 |
| 15 | MP3C | Mx | .001 | 2.5 |
| 16 | MP3C | X | -2.626 | 4.5 |
| 17 | MP3C | Z | 4.549 | 4.5 |
| 18 | MP3C | Mx | .001 | 4.5 |
| 19 | MP2A | X | -.45 | 2 |
| 20 | MP2A | Z | .78 | 2 |
| 21 | MP2A | Mx | -.000225 | 2 |
| 22 | MP2B | X | -.337 | 2 |
| 23 | MP2B | Z | .584 | 2 |
| 24 | MP2B | Mx | .000337 | 2 |
| 25 | MP2C | X | -.45 | 2 |
| 26 | MP2C | Z | .78 | 2 |
| 27 | MP2C | Mx | -.000225 | 2 |
| 28 | MP2A | X | -2.261 | 3.5 |
| 29 | MP2A | Z | 3.915 | 3.5 |
| 30 | MP2A | Mx | -.001 | 3.5 |
| 31 | MP2B | X | -1.648 | 3.5 |
| 32 | MP2B | Z | 2.854 | 3.5 |
| 33 | MP2B | Mx | .002 | 3.5 |
| 34 | MP2C | X | -2.261 | 3.5 |
| 35 | MP2C | Z | 3.915 | 3.5 |
| 36 | MP2C | Mx | -.001 | 3.5 |
| 37 | MP3A | X | -2.182 | 3.5 |
| 38 | MP3A | Z | 3.78 | 3.5 |
| 39 | MP3A | Mx | -.001 | 3.5 |
| 40 | MP3B | X | -1.335 | 3.5 |
| 41 | MP3B | Z | 2.312 | 3.5 |
| 42 | MP3B | Mx | .001 | 3.5 |
| 43 | MP3C | X | -2.182 | 3.5 |
| 44 | MP3C | Z | 3.78 | 3.5 |
| 45 | MP3C | Mx | -.001 | 3.5 |
| 46 | MP2A | X | -5.489 | 1.5 |
| 47 | MP2A | Z | 9.507 | 1.5 |
| 48 | MP2A | Mx | .008 | 1.5 |
| 49 | MP2A | X | -5.489 | 5.5 |
| 50 | MP2A | Z | 9.507 | 5.5 |
| 51 | MP2A | Mx | .008 | 5.5 |
| 52 | MP2B | X | -3.943 | 1.5 |
| 53 | MP2B | Z | 6.83 | 1.5 |
| 54 | MP2B | Mx | .004 | 1.5 |
| 55 | MP2B | X | -3.943 | 5.5 |
| 56 | MP2B | Z | 6.83 | 5.5 |
| 57 | MP2B | Mx | .004 | 5.5 |
| 58 | MP2C | X | -3.943 | 1.5 |
| 59 | MP2C | Z | 6.83 | 1.5 |

Member Point Loads (BLC 34 : Antenna Wm (210 Deg)) (Continued)

| Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] | |
|--------------|-----------|--------------------|----------------|-----|
| 60 | MP2C | Mx | -0.04 | 1.5 |
| 61 | MP2C | X | -3.943 | 5.5 |
| 62 | MP2C | Z | 6.83 | 5.5 |
| 63 | MP2C | Mx | -0.04 | 5.5 |
| 64 | MP2A | X | -5.489 | 1.5 |
| 65 | MP2A | Z | 9.507 | 1.5 |
| 66 | MP2A | Mx | -0.03 | 1.5 |
| 67 | MP2A | X | -5.489 | 5.5 |
| 68 | MP2A | Z | 9.507 | 5.5 |
| 69 | MP2A | Mx | -0.03 | 5.5 |
| 70 | MP2B | X | -3.943 | 1.5 |
| 71 | MP2B | Z | 6.83 | 1.5 |
| 72 | MP2B | Mx | .004 | 1.5 |
| 73 | MP2B | X | -3.943 | 5.5 |
| 74 | MP2B | Z | 6.83 | 5.5 |
| 75 | MP2B | Mx | .004 | 5.5 |
| 76 | MP2C | X | -5.489 | 1.5 |
| 77 | MP2C | Z | 9.507 | 1.5 |
| 78 | MP2C | Mx | .008 | 1.5 |
| 79 | MP2C | X | -5.489 | 5.5 |
| 80 | MP2C | Z | 9.507 | 5.5 |
| 81 | MP2C | Mx | .008 | 5.5 |
| 82 | MP1A | X | -6.158 | 1.5 |
| 83 | MP1A | Z | 10.666 | 1.5 |
| 84 | MP1A | Mx | .003 | 1.5 |
| 85 | MP1A | X | -6.158 | 5.5 |
| 86 | MP1A | Z | 10.666 | 5.5 |
| 87 | MP1A | Mx | .003 | 5.5 |
| 88 | MP1B | X | -5.651 | 1.5 |
| 89 | MP1B | Z | 9.788 | 1.5 |
| 90 | MP1B | Mx | -.006 | 1.5 |
| 91 | MP1B | X | -5.651 | 5.5 |
| 92 | MP1B | Z | 9.788 | 5.5 |
| 93 | MP1B | Mx | -.006 | 5.5 |
| 94 | MP1C | X | -6.158 | 1.5 |
| 95 | MP1C | Z | 10.666 | 1.5 |
| 96 | MP1C | Mx | .003 | 1.5 |
| 97 | MP1C | X | -6.158 | 5.5 |
| 98 | MP1C | Z | 10.666 | 5.5 |
| 99 | MP1C | Mx | .003 | 5.5 |
| 100 | MP4A | X | -6.158 | 1.5 |
| 101 | MP4A | Z | 10.666 | 1.5 |
| 102 | MP4A | Mx | .003 | 1.5 |
| 103 | MP4A | X | -6.158 | 5.5 |
| 104 | MP4A | Z | 10.666 | 5.5 |
| 105 | MP4A | Mx | .003 | 5.5 |
| 106 | MP4B | X | -5.651 | 1.5 |
| 107 | MP4B | Z | 9.788 | 1.5 |
| 108 | MP4B | Mx | -.006 | 1.5 |
| 109 | MP4B | X | -5.651 | 5.5 |
| 110 | MP4B | Z | 9.788 | 5.5 |
| 111 | MP4B | Mx | -.006 | 5.5 |
| 112 | MP4C | X | -6.158 | 1.5 |
| 113 | MP4C | Z | 10.666 | 1.5 |
| 114 | MP4C | Mx | .003 | 1.5 |
| 115 | MP4C | X | -6.158 | 5.5 |
| 116 | MP4C | Z | 10.666 | 5.5 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Point Loads (BLC 34 : Antenna Wm (210 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 117 | MP4C | Mx | .003 | 5.5 |

Member Point Loads (BLC 35 : Antenna Wm (240 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | -2.917 | 2.5 |
| 2 | MP3A | Z | 1.684 | 2.5 |
| 3 | MP3A | Mx | .001 | 2.5 |
| 4 | MP3A | X | -2.917 | 4.5 |
| 5 | MP3A | Z | 1.684 | 4.5 |
| 6 | MP3A | Mx | .001 | 4.5 |
| 7 | MP3B | X | -2.917 | 2.5 |
| 8 | MP3B | Z | 1.684 | 2.5 |
| 9 | MP3B | Mx | -.001 | 2.5 |
| 10 | MP3B | X | -2.917 | 4.5 |
| 11 | MP3B | Z | 1.684 | 4.5 |
| 12 | MP3B | Mx | -.001 | 4.5 |
| 13 | MP3C | X | -5.365 | 2.5 |
| 14 | MP3C | Z | 3.098 | 2.5 |
| 15 | MP3C | Mx | 0 | 2.5 |
| 16 | MP3C | X | -5.365 | 4.5 |
| 17 | MP3C | Z | 3.098 | 4.5 |
| 18 | MP3C | Mx | 0 | 4.5 |
| 19 | MP2A | X | -.65 | 2 |
| 20 | MP2A | Z | .375 | 2 |
| 21 | MP2A | Mx | -.000325 | 2 |
| 22 | MP2B | X | -.65 | 2 |
| 23 | MP2B | Z | .375 | 2 |
| 24 | MP2B | Mx | .000325 | 2 |
| 25 | MP2C | X | -.845 | 2 |
| 26 | MP2C | Z | .488 | 2 |
| 27 | MP2C | Mx | 0 | 2 |
| 28 | MP2A | X | -3.208 | 3.5 |
| 29 | MP2A | Z | 1.852 | 3.5 |
| 30 | MP2A | Mx | -.002 | 3.5 |
| 31 | MP2B | X | -3.208 | 3.5 |
| 32 | MP2B | Z | 1.852 | 3.5 |
| 33 | MP2B | Mx | .002 | 3.5 |
| 34 | MP2C | X | -4.269 | 3.5 |
| 35 | MP2C | Z | 2.465 | 3.5 |
| 36 | MP2C | Mx | 0 | 3.5 |
| 37 | MP3A | X | -2.801 | 3.5 |
| 38 | MP3A | Z | 1.617 | 3.5 |
| 39 | MP3A | Mx | -.001 | 3.5 |
| 40 | MP3B | X | -2.801 | 3.5 |
| 41 | MP3B | Z | 1.617 | 3.5 |
| 42 | MP3B | Mx | .001 | 3.5 |
| 43 | MP3C | X | -4.269 | 3.5 |
| 44 | MP3C | Z | 2.465 | 3.5 |
| 45 | MP3C | Mx | 0 | 3.5 |
| 46 | MP2A | X | -7.722 | 1.5 |
| 47 | MP2A | Z | 4.458 | 1.5 |
| 48 | MP2A | Mx | .006 | 1.5 |
| 49 | MP2A | X | -7.722 | 5.5 |
| 50 | MP2A | Z | 4.458 | 5.5 |
| 51 | MP2A | Mx | .006 | 5.5 |
| 52 | MP2B | X | -7.722 | 1.5 |

Member Point Loads (BLC 35 : Antenna Wm (240 Deg)) (Continued)

| Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] | |
|--------------|-----------|--------------------|----------------|-----|
| 53 | MP2B | Z | 4.458 | 1.5 |
| 54 | MP2B | Mx | .001 | 1.5 |
| 55 | MP2B | X | -7.722 | 5.5 |
| 56 | MP2B | Z | 4.458 | 5.5 |
| 57 | MP2B | Mx | .001 | 5.5 |
| 58 | MP2C | X | -7.722 | 1.5 |
| 59 | MP2C | Z | 4.458 | 1.5 |
| 60 | MP2C | Mx | -.001 | 1.5 |
| 61 | MP2C | X | -7.722 | 5.5 |
| 62 | MP2C | Z | 4.458 | 5.5 |
| 63 | MP2C | Mx | -.001 | 5.5 |
| 64 | MP2A | X | -7.722 | 1.5 |
| 65 | MP2A | Z | 4.458 | 1.5 |
| 66 | MP2A | Mx | .001 | 1.5 |
| 67 | MP2A | X | -7.722 | 5.5 |
| 68 | MP2A | Z | 4.458 | 5.5 |
| 69 | MP2A | Mx | .001 | 5.5 |
| 70 | MP2B | X | -7.722 | 1.5 |
| 71 | MP2B | Z | 4.458 | 1.5 |
| 72 | MP2B | Mx | .006 | 1.5 |
| 73 | MP2B | X | -7.722 | 5.5 |
| 74 | MP2B | Z | 4.458 | 5.5 |
| 75 | MP2B | Mx | .006 | 5.5 |
| 76 | MP2C | X | -10.399 | 1.5 |
| 77 | MP2C | Z | 6.004 | 1.5 |
| 78 | MP2C | Mx | .007 | 1.5 |
| 79 | MP2C | X | -10.399 | 5.5 |
| 80 | MP2C | Z | 6.004 | 5.5 |
| 81 | MP2C | Mx | .007 | 5.5 |
| 82 | MP1A | X | -10.081 | 1.5 |
| 83 | MP1A | Z | 5.82 | 1.5 |
| 84 | MP1A | Mx | .005 | 1.5 |
| 85 | MP1A | X | -10.081 | 5.5 |
| 86 | MP1A | Z | 5.82 | 5.5 |
| 87 | MP1A | Mx | .005 | 5.5 |
| 88 | MP1B | X | -10.081 | 1.5 |
| 89 | MP1B | Z | 5.82 | 1.5 |
| 90 | MP1B | Mx | -.005 | 1.5 |
| 91 | MP1B | X | -10.081 | 5.5 |
| 92 | MP1B | Z | 5.82 | 5.5 |
| 93 | MP1B | Mx | -.005 | 5.5 |
| 94 | MP1C | X | -10.958 | 1.5 |
| 95 | MP1C | Z | 6.327 | 1.5 |
| 96 | MP1C | Mx | 0 | 1.5 |
| 97 | MP1C | X | -10.958 | 5.5 |
| 98 | MP1C | Z | 6.327 | 5.5 |
| 99 | MP1C | Mx | 0 | 5.5 |
| 100 | MP4A | X | -10.081 | 1.5 |
| 101 | MP4A | Z | 5.82 | 1.5 |
| 102 | MP4A | Mx | .005 | 1.5 |
| 103 | MP4A | X | -10.081 | 5.5 |
| 104 | MP4A | Z | 5.82 | 5.5 |
| 105 | MP4A | Mx | .005 | 5.5 |
| 106 | MP4B | X | -10.081 | 1.5 |
| 107 | MP4B | Z | 5.82 | 1.5 |
| 108 | MP4B | Mx | -.005 | 1.5 |
| 109 | MP4B | X | -10.081 | 5.5 |

Member Point Loads (BLC 35 : Antenna Wm (240 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 110 | MP4B | Z | 5.82 | 5.5 |
| 111 | MP4B | Mx | -0.005 | 5.5 |
| 112 | MP4C | X | -10.958 | 1.5 |
| 113 | MP4C | Z | 6.327 | 1.5 |
| 114 | MP4C | Mx | 0 | 1.5 |
| 115 | MP4C | X | -10.958 | 5.5 |
| 116 | MP4C | Z | 6.327 | 5.5 |
| 117 | MP4C | Mx | 0 | 5.5 |

Member Point Loads (BLC 36 : Antenna Wm (270 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | -2.425 | 2.5 |
| 2 | MP3A | Z | 0 | 2.5 |
| 3 | MP3A | Mx | .001 | 2.5 |
| 4 | MP3A | X | -2.425 | 4.5 |
| 5 | MP3A | Z | 0 | 4.5 |
| 6 | MP3A | Mx | .001 | 4.5 |
| 7 | MP3B | X | -5.253 | 2.5 |
| 8 | MP3B | Z | 0 | 2.5 |
| 9 | MP3B | Mx | -.001 | 2.5 |
| 10 | MP3B | X | -5.253 | 4.5 |
| 11 | MP3B | Z | 0 | 4.5 |
| 12 | MP3B | Mx | -.001 | 4.5 |
| 13 | MP3C | X | -5.253 | 2.5 |
| 14 | MP3C | Z | 0 | 2.5 |
| 15 | MP3C | Mx | -.001 | 2.5 |
| 16 | MP3C | X | -5.253 | 4.5 |
| 17 | MP3C | Z | 0 | 4.5 |
| 18 | MP3C | Mx | -.001 | 4.5 |
| 19 | MP2A | X | -.675 | 2 |
| 20 | MP2A | Z | 0 | 2 |
| 21 | MP2A | Mx | -.000338 | 2 |
| 22 | MP2B | X | -.9 | 2 |
| 23 | MP2B | Z | 0 | 2 |
| 24 | MP2B | Mx | .000225 | 2 |
| 25 | MP2C | X | -.9 | 2 |
| 26 | MP2C | Z | 0 | 2 |
| 27 | MP2C | Mx | .000225 | 2 |
| 28 | MP2A | X | -3.295 | 3.5 |
| 29 | MP2A | Z | 0 | 3.5 |
| 30 | MP2A | Mx | -.002 | 3.5 |
| 31 | MP2B | X | -4.521 | 3.5 |
| 32 | MP2B | Z | 0 | 3.5 |
| 33 | MP2B | Mx | .001 | 3.5 |
| 34 | MP2C | X | -4.521 | 3.5 |
| 35 | MP2C | Z | 0 | 3.5 |
| 36 | MP2C | Mx | .001 | 3.5 |
| 37 | MP3A | X | -2.669 | 3.5 |
| 38 | MP3A | Z | 0 | 3.5 |
| 39 | MP3A | Mx | -.001 | 3.5 |
| 40 | MP3B | X | -4.365 | 3.5 |
| 41 | MP3B | Z | 0 | 3.5 |
| 42 | MP3B | Mx | .001 | 3.5 |
| 43 | MP3C | X | -4.365 | 3.5 |
| 44 | MP3C | Z | 0 | 3.5 |
| 45 | MP3C | Mx | .001 | 3.5 |

Member Point Loads (BLC 36 : Antenna Wm (270 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 46 | MP2A | X | -7.887 | 1.5 |
| 47 | MP2A | Z | 0 | 1.5 |
| 48 | MP2A | Mx | .004 | 1.5 |
| 49 | MP2A | X | -7.887 | 5.5 |
| 50 | MP2A | Z | 0 | 5.5 |
| 51 | MP2A | Mx | .004 | 5.5 |
| 52 | MP2B | X | -10.978 | 1.5 |
| 53 | MP2B | Z | 0 | 1.5 |
| 54 | MP2B | Mx | -.003 | 1.5 |
| 55 | MP2B | X | -10.978 | 5.5 |
| 56 | MP2B | Z | 0 | 5.5 |
| 57 | MP2B | Mx | -.003 | 5.5 |
| 58 | MP2C | X | -10.978 | 1.5 |
| 59 | MP2C | Z | 0 | 1.5 |
| 60 | MP2C | Mx | .003 | 1.5 |
| 61 | MP2C | X | -10.978 | 5.5 |
| 62 | MP2C | Z | 0 | 5.5 |
| 63 | MP2C | Mx | .003 | 5.5 |
| 64 | MP2A | X | -7.887 | 1.5 |
| 65 | MP2A | Z | 0 | 1.5 |
| 66 | MP2A | Mx | .004 | 1.5 |
| 67 | MP2A | X | -7.887 | 5.5 |
| 68 | MP2A | Z | 0 | 5.5 |
| 69 | MP2A | Mx | .004 | 5.5 |
| 70 | MP2B | X | -10.978 | 1.5 |
| 71 | MP2B | Z | 0 | 1.5 |
| 72 | MP2B | Mx | .008 | 1.5 |
| 73 | MP2B | X | -10.978 | 5.5 |
| 74 | MP2B | Z | 0 | 5.5 |
| 75 | MP2B | Mx | .008 | 5.5 |
| 76 | MP2C | X | -10.978 | 1.5 |
| 77 | MP2C | Z | 0 | 1.5 |
| 78 | MP2C | Mx | .003 | 1.5 |
| 79 | MP2C | X | -10.978 | 5.5 |
| 80 | MP2C | Z | 0 | 5.5 |
| 81 | MP2C | Mx | .003 | 5.5 |
| 82 | MP1A | X | -11.302 | 1.5 |
| 83 | MP1A | Z | 0 | 1.5 |
| 84 | MP1A | Mx | .006 | 1.5 |
| 85 | MP1A | X | -11.302 | 5.5 |
| 86 | MP1A | Z | 0 | 5.5 |
| 87 | MP1A | Mx | .006 | 5.5 |
| 88 | MP1B | X | -12.316 | 1.5 |
| 89 | MP1B | Z | 0 | 1.5 |
| 90 | MP1B | Mx | -.003 | 1.5 |
| 91 | MP1B | X | -12.316 | 5.5 |
| 92 | MP1B | Z | 0 | 5.5 |
| 93 | MP1B | Mx | -.003 | 5.5 |
| 94 | MP1C | X | -12.316 | 1.5 |
| 95 | MP1C | Z | 0 | 1.5 |
| 96 | MP1C | Mx | -.003 | 1.5 |
| 97 | MP1C | X | -12.316 | 5.5 |
| 98 | MP1C | Z | 0 | 5.5 |
| 99 | MP1C | Mx | -.003 | 5.5 |
| 100 | MP4A | X | -11.302 | 1.5 |
| 101 | MP4A | Z | 0 | 1.5 |
| 102 | MP4A | Mx | .006 | 1.5 |

Member Point Loads (BLC 36 : Antenna Wm (270 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|-----|--------------|-----------|--------------------|----------------|
| 103 | MP4A | X | -11.302 | 5.5 |
| 104 | MP4A | Z | 0 | 5.5 |
| 105 | MP4A | Mx | .006 | 5.5 |
| 106 | MP4B | X | -12.316 | 1.5 |
| 107 | MP4B | Z | 0 | 1.5 |
| 108 | MP4B | Mx | -.003 | 1.5 |
| 109 | MP4B | X | -12.316 | 5.5 |
| 110 | MP4B | Z | 0 | 5.5 |
| 111 | MP4B | Mx | -.003 | 5.5 |
| 112 | MP4C | X | -12.316 | 1.5 |
| 113 | MP4C | Z | 0 | 1.5 |
| 114 | MP4C | Mx | -.003 | 1.5 |
| 115 | MP4C | X | -12.316 | 5.5 |
| 116 | MP4C | Z | 0 | 5.5 |
| 117 | MP4C | Mx | -.003 | 5.5 |

Member Point Loads (BLC 37 : Antenna Wm (300 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | MP3A | X | -2.917 | 2.5 |
| 2 | MP3A | Z | -1.684 | 2.5 |
| 3 | MP3A | Mx | .001 | 2.5 |
| 4 | MP3A | X | -2.917 | 4.5 |
| 5 | MP3A | Z | -1.684 | 4.5 |
| 6 | MP3A | Mx | .001 | 4.5 |
| 7 | MP3B | X | -5.365 | 2.5 |
| 8 | MP3B | Z | -3.098 | 2.5 |
| 9 | MP3B | Mx | 0 | 2.5 |
| 10 | MP3B | X | -5.365 | 4.5 |
| 11 | MP3B | Z | -3.098 | 4.5 |
| 12 | MP3B | Mx | 0 | 4.5 |
| 13 | MP3C | X | -2.917 | 2.5 |
| 14 | MP3C | Z | -1.684 | 2.5 |
| 15 | MP3C | Mx | -.001 | 2.5 |
| 16 | MP3C | X | -2.917 | 4.5 |
| 17 | MP3C | Z | -1.684 | 4.5 |
| 18 | MP3C | Mx | -.001 | 4.5 |
| 19 | MP2A | X | -.65 | 2 |
| 20 | MP2A | Z | -.375 | 2 |
| 21 | MP2A | Mx | -.000325 | 2 |
| 22 | MP2B | X | -.845 | 2 |
| 23 | MP2B | Z | -.488 | 2 |
| 24 | MP2B | Mx | 0 | 2 |
| 25 | MP2C | X | -.65 | 2 |
| 26 | MP2C | Z | -.375 | 2 |
| 27 | MP2C | Mx | .000325 | 2 |
| 28 | MP2A | X | -3.208 | 3.5 |
| 29 | MP2A | Z | -1.852 | 3.5 |
| 30 | MP2A | Mx | -.002 | 3.5 |
| 31 | MP2B | X | -4.269 | 3.5 |
| 32 | MP2B | Z | -2.465 | 3.5 |
| 33 | MP2B | Mx | 0 | 3.5 |
| 34 | MP2C | X | -3.208 | 3.5 |
| 35 | MP2C | Z | -1.852 | 3.5 |
| 36 | MP2C | Mx | .002 | 3.5 |
| 37 | MP3A | X | -2.801 | 3.5 |
| 38 | MP3A | Z | -1.617 | 3.5 |

Member Point Loads (BLC 37 : Antenna Wm (300 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 39 | MP3A | Mx | -0.001 | 3.5 |
| 40 | MP3B | X | -4.269 | 3.5 |
| 41 | MP3B | Z | -2.465 | 3.5 |
| 42 | MP3B | Mx | 0 | 3.5 |
| 43 | MP3C | X | -2.801 | 3.5 |
| 44 | MP3C | Z | -1.617 | 3.5 |
| 45 | MP3C | Mx | .001 | 3.5 |
| 46 | MP2A | X | -7.722 | 1.5 |
| 47 | MP2A | Z | -4.458 | 1.5 |
| 48 | MP2A | Mx | .001 | 1.5 |
| 49 | MP2A | X | -7.722 | 5.5 |
| 50 | MP2A | Z | -4.458 | 5.5 |
| 51 | MP2A | Mx | .001 | 5.5 |
| 52 | MP2B | X | -10.399 | 1.5 |
| 53 | MP2B | Z | -6.004 | 1.5 |
| 54 | MP2B | Mx | -.007 | 1.5 |
| 55 | MP2B | X | -10.399 | 5.5 |
| 56 | MP2B | Z | -6.004 | 5.5 |
| 57 | MP2B | Mx | -.007 | 5.5 |
| 58 | MP2C | X | -10.399 | 1.5 |
| 59 | MP2C | Z | -6.004 | 1.5 |
| 60 | MP2C | Mx | .007 | 1.5 |
| 61 | MP2C | X | -10.399 | 5.5 |
| 62 | MP2C | Z | -6.004 | 5.5 |
| 63 | MP2C | Mx | .007 | 5.5 |
| 64 | MP2A | X | -7.722 | 1.5 |
| 65 | MP2A | Z | -4.458 | 1.5 |
| 66 | MP2A | Mx | .006 | 1.5 |
| 67 | MP2A | X | -7.722 | 5.5 |
| 68 | MP2A | Z | -4.458 | 5.5 |
| 69 | MP2A | Mx | .006 | 5.5 |
| 70 | MP2B | X | -10.399 | 1.5 |
| 71 | MP2B | Z | -6.004 | 1.5 |
| 72 | MP2B | Mx | .007 | 1.5 |
| 73 | MP2B | X | -10.399 | 5.5 |
| 74 | MP2B | Z | -6.004 | 5.5 |
| 75 | MP2B | Mx | .007 | 5.5 |
| 76 | MP2C | X | -7.722 | 1.5 |
| 77 | MP2C | Z | -4.458 | 1.5 |
| 78 | MP2C | Mx | -.001 | 1.5 |
| 79 | MP2C | X | -7.722 | 5.5 |
| 80 | MP2C | Z | -4.458 | 5.5 |
| 81 | MP2C | Mx | -.001 | 5.5 |
| 82 | MP1A | X | -10.081 | 1.5 |
| 83 | MP1A | Z | -5.82 | 1.5 |
| 84 | MP1A | Mx | .005 | 1.5 |
| 85 | MP1A | X | -10.081 | 5.5 |
| 86 | MP1A | Z | -5.82 | 5.5 |
| 87 | MP1A | Mx | .005 | 5.5 |
| 88 | MP1B | X | -10.958 | 1.5 |
| 89 | MP1B | Z | -6.327 | 1.5 |
| 90 | MP1B | Mx | 0 | 1.5 |
| 91 | MP1B | X | -10.958 | 5.5 |
| 92 | MP1B | Z | -6.327 | 5.5 |
| 93 | MP1B | Mx | 0 | 5.5 |
| 94 | MP1C | X | -10.081 | 1.5 |
| 95 | MP1C | Z | -5.82 | 1.5 |

Member Point Loads (BLC 37 : Antenna Wm (300 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft. %] |
|-----|--------------|-----------|--------------------|-----------------|
| 96 | MP1C | Mx | -0.005 | 1.5 |
| 97 | MP1C | X | -10.081 | 5.5 |
| 98 | MP1C | Z | -5.82 | 5.5 |
| 99 | MP1C | Mx | -0.005 | 5.5 |
| 100 | MP4A | X | -10.081 | 1.5 |
| 101 | MP4A | Z | -5.82 | 1.5 |
| 102 | MP4A | Mx | .005 | 1.5 |
| 103 | MP4A | X | -10.081 | 5.5 |
| 104 | MP4A | Z | -5.82 | 5.5 |
| 105 | MP4A | Mx | .005 | 5.5 |
| 106 | MP4B | X | -10.958 | 1.5 |
| 107 | MP4B | Z | -6.327 | 1.5 |
| 108 | MP4B | Mx | 0 | 1.5 |
| 109 | MP4B | X | -10.958 | 5.5 |
| 110 | MP4B | Z | -6.327 | 5.5 |
| 111 | MP4B | Mx | 0 | 5.5 |
| 112 | MP4C | X | -10.081 | 1.5 |
| 113 | MP4C | Z | -5.82 | 1.5 |
| 114 | MP4C | Mx | -0.005 | 1.5 |
| 115 | MP4C | X | -10.081 | 5.5 |
| 116 | MP4C | Z | -5.82 | 5.5 |
| 117 | MP4C | Mx | -0.005 | 5.5 |

Member Point Loads (BLC 38 : Antenna Wm (330 Deg))

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft. %] |
|----|--------------|-----------|--------------------|-----------------|
| 1 | MP3A | X | -2.626 | 2.5 |
| 2 | MP3A | Z | -4.549 | 2.5 |
| 3 | MP3A | Mx | .001 | 2.5 |
| 4 | MP3A | X | -2.626 | 4.5 |
| 5 | MP3A | Z | -4.549 | 4.5 |
| 6 | MP3A | Mx | .001 | 4.5 |
| 7 | MP3B | X | -2.626 | 2.5 |
| 8 | MP3B | Z | -4.549 | 2.5 |
| 9 | MP3B | Mx | .001 | 2.5 |
| 10 | MP3B | X | -2.626 | 4.5 |
| 11 | MP3B | Z | -4.549 | 4.5 |
| 12 | MP3B | Mx | .001 | 4.5 |
| 13 | MP3C | X | -1.213 | 2.5 |
| 14 | MP3C | Z | -2.1 | 2.5 |
| 15 | MP3C | Mx | -.001 | 2.5 |
| 16 | MP3C | X | -1.213 | 4.5 |
| 17 | MP3C | Z | -2.1 | 4.5 |
| 18 | MP3C | Mx | -.001 | 4.5 |
| 19 | MP2A | X | -.45 | 2 |
| 20 | MP2A | Z | -.78 | 2 |
| 21 | MP2A | Mx | -.000225 | 2 |
| 22 | MP2B | X | -.45 | 2 |
| 23 | MP2B | Z | -.78 | 2 |
| 24 | MP2B | Mx | -.000225 | 2 |
| 25 | MP2C | X | -.337 | 2 |
| 26 | MP2C | Z | -.584 | 2 |
| 27 | MP2C | Mx | .000337 | 2 |
| 28 | MP2A | X | -2.261 | 3.5 |
| 29 | MP2A | Z | -3.915 | 3.5 |
| 30 | MP2A | Mx | -.001 | 3.5 |
| 31 | MP2B | X | -2.261 | 3.5 |

Member Point Loads (BLC 38 : Antenna Wm (330 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 32 | MP2B | Z | -3.915 | 3.5 |
| 33 | MP2B | Mx | -.001 | 3.5 |
| 34 | MP2C | X | -1.648 | 3.5 |
| 35 | MP2C | Z | -2.854 | 3.5 |
| 36 | MP2C | Mx | .002 | 3.5 |
| 37 | MP3A | X | -2.182 | 3.5 |
| 38 | MP3A | Z | -3.78 | 3.5 |
| 39 | MP3A | Mx | -.001 | 3.5 |
| 40 | MP3B | X | -2.182 | 3.5 |
| 41 | MP3B | Z | -3.78 | 3.5 |
| 42 | MP3B | Mx | -.001 | 3.5 |
| 43 | MP3C | X | -1.335 | 3.5 |
| 44 | MP3C | Z | -2.312 | 3.5 |
| 45 | MP3C | Mx | .001 | 3.5 |
| 46 | MP2A | X | -5.489 | 1.5 |
| 47 | MP2A | Z | -9.507 | 1.5 |
| 48 | MP2A | Mx | -.003 | 1.5 |
| 49 | MP2A | X | -5.489 | 5.5 |
| 50 | MP2A | Z | -9.507 | 5.5 |
| 51 | MP2A | Mx | -.003 | 5.5 |
| 52 | MP2B | X | -5.489 | 1.5 |
| 53 | MP2B | Z | -9.507 | 1.5 |
| 54 | MP2B | Mx | -.008 | 1.5 |
| 55 | MP2B | X | -5.489 | 5.5 |
| 56 | MP2B | Z | -9.507 | 5.5 |
| 57 | MP2B | Mx | -.008 | 5.5 |
| 58 | MP2C | X | -5.489 | 1.5 |
| 59 | MP2C | Z | -9.507 | 1.5 |
| 60 | MP2C | Mx | .008 | 1.5 |
| 61 | MP2C | X | -5.489 | 5.5 |
| 62 | MP2C | Z | -9.507 | 5.5 |
| 63 | MP2C | Mx | .008 | 5.5 |
| 64 | MP2A | X | -5.489 | 1.5 |
| 65 | MP2A | Z | -9.507 | 1.5 |
| 66 | MP2A | Mx | .008 | 1.5 |
| 67 | MP2A | X | -5.489 | 5.5 |
| 68 | MP2A | Z | -9.507 | 5.5 |
| 69 | MP2A | Mx | .008 | 5.5 |
| 70 | MP2B | X | -5.489 | 1.5 |
| 71 | MP2B | Z | -9.507 | 1.5 |
| 72 | MP2B | Mx | .003 | 1.5 |
| 73 | MP2B | X | -5.489 | 5.5 |
| 74 | MP2B | Z | -9.507 | 5.5 |
| 75 | MP2B | Mx | .003 | 5.5 |
| 76 | MP2C | X | -3.943 | 1.5 |
| 77 | MP2C | Z | -6.83 | 1.5 |
| 78 | MP2C | Mx | -.004 | 1.5 |
| 79 | MP2C | X | -3.943 | 5.5 |
| 80 | MP2C | Z | -6.83 | 5.5 |
| 81 | MP2C | Mx | -.004 | 5.5 |
| 82 | MP1A | X | -6.158 | 1.5 |
| 83 | MP1A | Z | -10.666 | 1.5 |
| 84 | MP1A | Mx | .003 | 1.5 |
| 85 | MP1A | X | -6.158 | 5.5 |
| 86 | MP1A | Z | -10.666 | 5.5 |
| 87 | MP1A | Mx | .003 | 5.5 |
| 88 | MP1B | X | -6.158 | 1.5 |

Member Point Loads (BLC 38 : Antenna Wm (330 Deg)) (Continued)

| | Member Label | Direction | Magnitude[lb,k-ft] | Location[ft, %] |
|-----|--------------|-----------|--------------------|-----------------|
| 89 | MP1B | Z | -10.666 | 1.5 |
| 90 | MP1B | Mx | .003 | 1.5 |
| 91 | MP1B | X | -6.158 | 5.5 |
| 92 | MP1B | Z | -10.666 | 5.5 |
| 93 | MP1B | Mx | .003 | 5.5 |
| 94 | MP1C | X | -5.651 | 1.5 |
| 95 | MP1C | Z | -9.788 | 1.5 |
| 96 | MP1C | Mx | -.006 | 1.5 |
| 97 | MP1C | X | -5.651 | 5.5 |
| 98 | MP1C | Z | -9.788 | 5.5 |
| 99 | MP1C | Mx | -.006 | 5.5 |
| 100 | MP4A | X | -6.158 | 1.5 |
| 101 | MP4A | Z | -10.666 | 1.5 |
| 102 | MP4A | Mx | .003 | 1.5 |
| 103 | MP4A | X | -6.158 | 5.5 |
| 104 | MP4A | Z | -10.666 | 5.5 |
| 105 | MP4A | Mx | .003 | 5.5 |
| 106 | MP4B | X | -6.158 | 1.5 |
| 107 | MP4B | Z | -10.666 | 1.5 |
| 108 | MP4B | Mx | .003 | 1.5 |
| 109 | MP4B | X | -6.158 | 5.5 |
| 110 | MP4B | Z | -10.666 | 5.5 |
| 111 | MP4B | Mx | .003 | 5.5 |
| 112 | MP4C | X | -5.651 | 1.5 |
| 113 | MP4C | Z | -9.788 | 1.5 |
| 114 | MP4C | Mx | -.006 | 1.5 |
| 115 | MP4C | X | -5.651 | 5.5 |
| 116 | MP4C | Z | -9.788 | 5.5 |
| 117 | MP4C | Mx | -.006 | 5.5 |

Member Point Loads (BLC 77 : Lm1)

| | Member Label | Direction | Magnitude[lb,k-ft] | Location[ft, %] |
|---|--------------|-----------|--------------------|-----------------|
| 1 | M21 | Y | -500 | 0 |

Member Point Loads (BLC 78 : Lm2)

| | Member Label | Direction | Magnitude[lb,k-ft] | Location[ft, %] |
|---|--------------|-----------|--------------------|-----------------|
| 1 | M22 | Y | -500 | 0 |

Member Point Loads (BLC 79 : Lv1)

| | Member Label | Direction | Magnitude[lb,k-ft] | Location[ft, %] |
|---|--------------|-----------|--------------------|-----------------|
| 1 | M1 | Y | -250 | 0 |

Member Point Loads (BLC 80 : Lv2)

| | Member Label | Direction | Magnitude[lb,k-ft] | Location[ft, %] |
|---|--------------|-----------|--------------------|-----------------|
| 1 | M1 | Y | -250 | %50 |

Member Distributed Loads (BLC 40 : Structure Di)

| | Member Label | Direction | Start Magnitude[lb/ft,F,ksf] | End Magnitude[lb/ft,F,k.. | Start Location[ft, %] | End Location[ft, %] |
|---|--------------|-----------|------------------------------|---------------------------|-----------------------|---------------------|
| 1 | M1 | Y | -6.608 | -6.608 | 0 | %100 |
| 2 | M4 | Y | -9.666 | -9.666 | 0 | %100 |
| 3 | M10 | Y | -9.666 | -9.666 | 0 | %100 |
| 4 | MP3A | Y | -5.013 | -5.013 | 0 | %100 |
| 5 | MP4A | Y | -5.013 | -5.013 | 0 | %100 |

Member Distributed Loads (BLC 40 : Structure Di) (Continued)

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k.] | Start Location[ft.%] | End Location[ft.%] |
|----|--------------|-----------|------------------------------|---------------------------|----------------------|--------------------|
| 6 | MP2A | Y | -5.013 | -5.013 | 0 | %100 |
| 7 | MP1A | Y | -5.013 | -5.013 | 0 | %100 |
| 8 | M43 | Y | -9.666 | -9.666 | 0 | %100 |
| 9 | M46 | Y | -10.182 | -10.182 | 0 | %100 |
| 10 | M51B | Y | -5.656 | -5.656 | 0 | %100 |
| 11 | M52B | Y | -5.656 | -5.656 | 0 | %100 |
| 12 | M76 | Y | -10.169 | -10.169 | 0 | %100 |
| 13 | M77 | Y | -10.169 | -10.169 | 0 | %100 |
| 14 | M80 | Y | -10.182 | -10.182 | 0 | %100 |
| 15 | M84 | Y | -10.169 | -10.169 | 0 | %100 |
| 16 | M85 | Y | -10.169 | -10.169 | 0 | %100 |
| 17 | M91 | Y | -10.182 | -10.182 | 0 | %100 |
| 18 | M34 | Y | -6.608 | -6.608 | 0 | %100 |
| 19 | M43A | Y | -6.608 | -6.608 | 0 | %100 |
| 20 | M52A | Y | -9.666 | -9.666 | 0 | %100 |
| 21 | M53 | Y | -9.666 | -9.666 | 0 | %100 |
| 22 | M54 | Y | -9.666 | -9.666 | 0 | %100 |
| 23 | M55 | Y | -10.182 | -10.182 | 0 | %100 |
| 24 | M58A | Y | -5.656 | -5.656 | 0 | %100 |
| 25 | M59A | Y | -5.656 | -5.656 | 0 | %100 |
| 26 | M63 | Y | -10.169 | -10.169 | 0 | %100 |
| 27 | M64 | Y | -10.169 | -10.169 | 0 | %100 |
| 28 | M66 | Y | -10.182 | -10.182 | 0 | %100 |
| 29 | M68 | Y | -10.169 | -10.169 | 0 | %100 |
| 30 | M69 | Y | -10.169 | -10.169 | 0 | %100 |
| 31 | M71 | Y | -10.182 | -10.182 | 0 | %100 |
| 32 | M76A | Y | -9.666 | -9.666 | 0 | %100 |
| 33 | M77A | Y | -9.666 | -9.666 | 0 | %100 |
| 34 | M78 | Y | -9.666 | -9.666 | 0 | %100 |
| 35 | M79A | Y | -10.182 | -10.182 | 0 | %100 |
| 36 | M82 | Y | -5.656 | -5.656 | 0 | %100 |
| 37 | M83A | Y | -5.656 | -5.656 | 0 | %100 |
| 38 | M87 | Y | -10.169 | -10.169 | 0 | %100 |
| 39 | M88A | Y | -10.169 | -10.169 | 0 | %100 |
| 40 | M90 | Y | -10.182 | -10.182 | 0 | %100 |
| 41 | M92A | Y | -10.169 | -10.169 | 0 | %100 |
| 42 | M93 | Y | -10.169 | -10.169 | 0 | %100 |
| 43 | M95 | Y | -10.182 | -10.182 | 0 | %100 |
| 44 | M84B | Y | -5.013 | -5.013 | 0 | %100 |
| 45 | M89A | Y | -5.013 | -5.013 | 0 | %100 |
| 46 | M94A | Y | -5.013 | -5.013 | 0 | %100 |
| 47 | MP3C | Y | -5.013 | -5.013 | 0 | %100 |
| 48 | MP4C | Y | -5.013 | -5.013 | 0 | %100 |
| 49 | MP2C | Y | -5.013 | -5.013 | 0 | %100 |
| 50 | MP1C | Y | -5.013 | -5.013 | 0 | %100 |
| 51 | MP3B | Y | -5.013 | -5.013 | 0 | %100 |
| 52 | MP4B | Y | -5.013 | -5.013 | 0 | %100 |
| 53 | MP2B | Y | -5.013 | -5.013 | 0 | %100 |
| 54 | MP1B | Y | -5.013 | -5.013 | 0 | %100 |
| 55 | M109 | Y | -6.658 | -6.658 | 0 | %100 |
| 56 | M112 | Y | -6.658 | -6.658 | 0 | %100 |
| 57 | M115 | Y | -6.658 | -6.658 | 0 | %100 |

Member Distributed Loads (BLC 41 : Structure Wo (0 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k.] | Start Location[ft.%] | End Location[ft.%] |
|---|--------------|-----------|------------------------------|---------------------------|----------------------|--------------------|
| 1 | M1 | X | 0 | 0 | 0 | %100 |

Member Distributed Loads (BLC 41 : Structure Wo (0 Deg)) (Continued)

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 2 | M1 | Z | -13.864 | -13.864 | 0 | %100 |
| 3 | M4 | X | 0 | 0 | 0 | %100 |
| 4 | M4 | Z | 0 | 0 | 0 | %100 |
| 5 | M10 | X | 0 | 0 | 0 | %100 |
| 6 | M10 | Z | -13.109 | -13.109 | 0 | %100 |
| 7 | MP3A | X | 0 | 0 | 0 | %100 |
| 8 | MP3A | Z | -9.523 | -9.523 | 0 | %100 |
| 9 | MP4A | X | 0 | 0 | 0 | %100 |
| 10 | MP4A | Z | -9.523 | -9.523 | 0 | %100 |
| 11 | MP2A | X | 0 | 0 | 0 | %100 |
| 12 | MP2A | Z | -9.523 | -9.523 | 0 | %100 |
| 13 | MP1A | X | 0 | 0 | 0 | %100 |
| 14 | MP1A | Z | -9.523 | -9.523 | 0 | %100 |
| 15 | M43 | X | 0 | 0 | 0 | %100 |
| 16 | M43 | Z | -13.109 | -13.109 | 0 | %100 |
| 17 | M46 | X | 0 | 0 | 0 | %100 |
| 18 | M46 | Z | -24.058 | -24.058 | 0 | %100 |
| 19 | M51B | X | 0 | 0 | 0 | %100 |
| 20 | M51B | Z | -3.34 | -3.34 | 0 | %100 |
| 21 | M52B | X | 0 | 0 | 0 | %100 |
| 22 | M52B | Z | -3.34 | -3.34 | 0 | %100 |
| 23 | M76 | X | 0 | 0 | 0 | %100 |
| 24 | M76 | Z | 0 | 0 | 0 | %100 |
| 25 | M77 | X | 0 | 0 | 0 | %100 |
| 26 | M77 | Z | -6.126 | -6.126 | 0 | %100 |
| 27 | M80 | X | 0 | 0 | 0 | %100 |
| 28 | M80 | Z | -6.452 | -6.452 | 0 | %100 |
| 29 | M84 | X | 0 | 0 | 0 | %100 |
| 30 | M84 | Z | 0 | 0 | 0 | %100 |
| 31 | M85 | X | 0 | 0 | 0 | %100 |
| 32 | M85 | Z | -6.126 | -6.126 | 0 | %100 |
| 33 | M91 | X | 0 | 0 | 0 | %100 |
| 34 | M91 | Z | -6.452 | -6.452 | 0 | %100 |
| 35 | M34 | X | 0 | 0 | 0 | %100 |
| 36 | M34 | Z | -3.466 | -3.466 | 0 | %100 |
| 37 | M43A | X | 0 | 0 | 0 | %100 |
| 38 | M43A | Z | -3.466 | -3.466 | 0 | %100 |
| 39 | M52A | X | 0 | 0 | 0 | %100 |
| 40 | M52A | Z | -11.687 | -11.687 | 0 | %100 |
| 41 | M53 | X | 0 | 0 | 0 | %100 |
| 42 | M53 | Z | -3.277 | -3.277 | 0 | %100 |
| 43 | M54 | X | 0 | 0 | 0 | %100 |
| 44 | M54 | Z | -3.277 | -3.277 | 0 | %100 |
| 45 | M55 | X | 0 | 0 | 0 | %100 |
| 46 | M55 | Z | -6.014 | -6.014 | 0 | %100 |
| 47 | M58A | X | 0 | 0 | 0 | %100 |
| 48 | M58A | Z | -3.34 | -3.34 | 0 | %100 |
| 49 | M59A | X | 0 | 0 | 0 | %100 |
| 50 | M59A | Z | -13.359 | -13.359 | 0 | %100 |
| 51 | M63 | X | 0 | 0 | 0 | %100 |
| 52 | M63 | Z | -18.043 | -18.043 | 0 | %100 |
| 53 | M64 | X | 0 | 0 | 0 | %100 |
| 54 | M64 | Z | -6.126 | -6.126 | 0 | %100 |
| 55 | M66 | X | 0 | 0 | 0 | %100 |
| 56 | M66 | Z | -6.452 | -6.452 | 0 | %100 |
| 57 | M68 | X | 0 | 0 | 0 | %100 |
| 58 | M68 | Z | -18.043 | -18.043 | 0 | %100 |

Member Distributed Loads (BLC 41 : Structure Wo (0 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft,F,ksf] | End Magnitude[lb/ft,F,k..] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 59 | M69 | X | 0 | 0 | %100 |
| 60 | M69 | Z | -24.503 | -24.503 | 0 |
| 61 | M71 | X | 0 | 0 | %100 |
| 62 | M71 | Z | -25.809 | -25.809 | 0 |
| 63 | M76A | X | 0 | 0 | %100 |
| 64 | M76A | Z | -11.687 | -11.687 | 0 |
| 65 | M77A | X | 0 | 0 | %100 |
| 66 | M77A | Z | -3.277 | -3.277 | 0 |
| 67 | M78 | X | 0 | 0 | %100 |
| 68 | M78 | Z | -3.277 | -3.277 | 0 |
| 69 | M79A | X | 0 | 0 | %100 |
| 70 | M79A | Z | -6.014 | -6.014 | 0 |
| 71 | M82 | X | 0 | 0 | %100 |
| 72 | M82 | Z | -13.359 | -13.359 | 0 |
| 73 | M83A | X | 0 | 0 | %100 |
| 74 | M83A | Z | -3.34 | -3.34 | 0 |
| 75 | M87 | X | 0 | 0 | %100 |
| 76 | M87 | Z | -18.043 | -18.043 | 0 |
| 77 | M88A | X | 0 | 0 | %100 |
| 78 | M88A | Z | -24.503 | -24.503 | 0 |
| 79 | M90 | X | 0 | 0 | %100 |
| 80 | M90 | Z | -25.809 | -25.809 | 0 |
| 81 | M92A | X | 0 | 0 | %100 |
| 82 | M92A | Z | -18.043 | -18.043 | 0 |
| 83 | M93 | X | 0 | 0 | %100 |
| 84 | M93 | Z | -6.126 | -6.126 | 0 |
| 85 | M95 | X | 0 | 0 | %100 |
| 86 | M95 | Z | -6.452 | -6.452 | 0 |
| 87 | M84B | X | 0 | 0 | %100 |
| 88 | M84B | Z | -9.523 | -9.523 | 0 |
| 89 | M89A | X | 0 | 0 | %100 |
| 90 | M89A | Z | -2.381 | -2.381 | 0 |
| 91 | M94A | X | 0 | 0 | %100 |
| 92 | M94A | Z | -2.381 | -2.381 | 0 |
| 93 | MP3C | X | 0 | 0 | %100 |
| 94 | MP3C | Z | -9.523 | -9.523 | 0 |
| 95 | MP4C | X | 0 | 0 | %100 |
| 96 | MP4C | Z | -9.523 | -9.523 | 0 |
| 97 | MP2C | X | 0 | 0 | %100 |
| 98 | MP2C | Z | -9.523 | -9.523 | 0 |
| 99 | MP1C | X | 0 | 0 | %100 |
| 100 | MP1C | Z | -9.523 | -9.523 | 0 |
| 101 | MP3B | X | 0 | 0 | %100 |
| 102 | MP3B | Z | -9.523 | -9.523 | 0 |
| 103 | MP4B | X | 0 | 0 | %100 |
| 104 | MP4B | Z | -9.523 | -9.523 | 0 |
| 105 | MP2B | X | 0 | 0 | %100 |
| 106 | MP2B | Z | -9.523 | -9.523 | 0 |
| 107 | MP1B | X | 0 | 0 | %100 |
| 108 | MP1B | Z | -9.523 | -9.523 | 0 |
| 109 | M109 | X | 0 | 0 | %100 |
| 110 | M109 | Z | -10.985 | -10.985 | 0 |
| 111 | M112 | X | 0 | 0 | %100 |
| 112 | M112 | Z | -2.746 | -2.746 | 0 |
| 113 | M115 | X | 0 | 0 | %100 |
| 114 | M115 | Z | -2.746 | -2.746 | 0 |

Member Distributed Loads (BLC 42 : Structure Wo (30 Deg))

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | 5.199 | 5.199 | 0 %100 |
| 2 | M1 | Z | -9.005 | -9.005 | 0 %100 |
| 3 | M4 | X | 1.948 | 1.948 | 0 %100 |
| 4 | M4 | Z | -3.374 | -3.374 | 0 %100 |
| 5 | M10 | X | 4.916 | 4.916 | 0 %100 |
| 6 | M10 | Z | -8.515 | -8.515 | 0 %100 |
| 7 | MP3A | X | 4.761 | 4.761 | 0 %100 |
| 8 | MP3A | Z | -8.247 | -8.247 | 0 %100 |
| 9 | MP4A | X | 4.761 | 4.761 | 0 %100 |
| 10 | MP4A | Z | -8.247 | -8.247 | 0 %100 |
| 11 | MP2A | X | 4.761 | 4.761 | 0 %100 |
| 12 | MP2A | Z | -8.247 | -8.247 | 0 %100 |
| 13 | MP1A | X | 4.761 | 4.761 | 0 %100 |
| 14 | MP1A | Z | -8.247 | -8.247 | 0 %100 |
| 15 | M43 | X | 4.916 | 4.916 | 0 %100 |
| 16 | M43 | Z | -8.515 | -8.515 | 0 %100 |
| 17 | M46 | X | 9.022 | 9.022 | 0 %100 |
| 18 | M46 | Z | -15.626 | -15.626 | 0 %100 |
| 19 | M51B | X | 5.01 | 5.01 | 0 %100 |
| 20 | M51B | Z | -8.677 | -8.677 | 0 %100 |
| 21 | M52B | X | 0 | 0 | 0 %100 |
| 22 | M52B | Z | 0 | 0 | 0 %100 |
| 23 | M76 | X | 3.007 | 3.007 | 0 %100 |
| 24 | M76 | Z | -5.209 | -5.209 | 0 %100 |
| 25 | M77 | X | 9.189 | 9.189 | 0 %100 |
| 26 | M77 | Z | -15.915 | -15.915 | 0 %100 |
| 27 | M80 | X | 9.678 | 9.678 | 0 %100 |
| 28 | M80 | Z | -16.763 | -16.763 | 0 %100 |
| 29 | M84 | X | 3.007 | 3.007 | 0 %100 |
| 30 | M84 | Z | -5.209 | -5.209 | 0 %100 |
| 31 | M85 | X | 0 | 0 | 0 %100 |
| 32 | M85 | Z | 0 | 0 | 0 %100 |
| 33 | M91 | X | 0 | 0 | 0 %100 |
| 34 | M91 | Z | 0 | 0 | 0 %100 |
| 35 | M34 | X | 5.199 | 5.199 | 0 %100 |
| 36 | M34 | Z | -9.005 | -9.005 | 0 %100 |
| 37 | M43A | X | 0 | 0 | 0 %100 |
| 38 | M43A | Z | 0 | 0 | 0 %100 |
| 39 | M52A | X | 1.948 | 1.948 | 0 %100 |
| 40 | M52A | Z | -3.374 | -3.374 | 0 %100 |
| 41 | M53 | X | 4.916 | 4.916 | 0 %100 |
| 42 | M53 | Z | -8.515 | -8.515 | 0 %100 |
| 43 | M54 | X | 4.916 | 4.916 | 0 %100 |
| 44 | M54 | Z | -8.515 | -8.515 | 0 %100 |
| 45 | M55 | X | 9.022 | 9.022 | 0 %100 |
| 46 | M55 | Z | -15.626 | -15.626 | 0 %100 |
| 47 | M58A | X | 0 | 0 | 0 %100 |
| 48 | M58A | Z | 0 | 0 | 0 %100 |
| 49 | M59A | X | 5.01 | 5.01 | 0 %100 |
| 50 | M59A | Z | -8.677 | -8.677 | 0 %100 |
| 51 | M63 | X | 3.007 | 3.007 | 0 %100 |
| 52 | M63 | Z | -5.209 | -5.209 | 0 %100 |
| 53 | M64 | X | 0 | 0 | 0 %100 |
| 54 | M64 | Z | 0 | 0 | 0 %100 |
| 55 | M66 | X | 0 | 0 | 0 %100 |
| 56 | M66 | Z | 0 | 0 | 0 %100 |
| 57 | M68 | X | 3.007 | 3.007 | 0 %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 42 : Structure Wo (30 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | -5.209 | -5.209 | 0 %100 |
| 59 | M69 | X | 9.189 | 9.189 | 0 %100 |
| 60 | M69 | Z | -15.915 | -15.915 | 0 %100 |
| 61 | M71 | X | 9.678 | 9.678 | 0 %100 |
| 62 | M71 | Z | -16.763 | -16.763 | 0 %100 |
| 63 | M76A | X | 7.791 | 7.791 | 0 %100 |
| 64 | M76A | Z | -13.495 | -13.495 | 0 %100 |
| 65 | M77A | X | 0 | 0 | 0 %100 |
| 66 | M77A | Z | 0 | 0 | 0 %100 |
| 67 | M78 | X | 0 | 0 | 0 %100 |
| 68 | M78 | Z | 0 | 0 | 0 %100 |
| 69 | M79A | X | 0 | 0 | 0 %100 |
| 70 | M79A | Z | 0 | 0 | 0 %100 |
| 71 | M82 | X | 5.01 | 5.01 | 0 %100 |
| 72 | M82 | Z | -8.677 | -8.677 | 0 %100 |
| 73 | M83A | X | 5.01 | 5.01 | 0 %100 |
| 74 | M83A | Z | -8.677 | -8.677 | 0 %100 |
| 75 | M87 | X | 12.029 | 12.029 | 0 %100 |
| 76 | M87 | Z | -20.835 | -20.835 | 0 %100 |
| 77 | M88A | X | 9.189 | 9.189 | 0 %100 |
| 78 | M88A | Z | -15.915 | -15.915 | 0 %100 |
| 79 | M90 | X | 9.678 | 9.678 | 0 %100 |
| 80 | M90 | Z | -16.763 | -16.763 | 0 %100 |
| 81 | M92A | X | 12.029 | 12.029 | 0 %100 |
| 82 | M92A | Z | -20.835 | -20.835 | 0 %100 |
| 83 | M93 | X | 9.189 | 9.189 | 0 %100 |
| 84 | M93 | Z | -15.915 | -15.915 | 0 %100 |
| 85 | M95 | X | 9.678 | 9.678 | 0 %100 |
| 86 | M95 | Z | -16.763 | -16.763 | 0 %100 |
| 87 | M84B | X | 3.571 | 3.571 | 0 %100 |
| 88 | M84B | Z | -6.185 | -6.185 | 0 %100 |
| 89 | M89A | X | 3.571 | 3.571 | 0 %100 |
| 90 | M89A | Z | -6.185 | -6.185 | 0 %100 |
| 91 | M94A | X | 0 | 0 | 0 %100 |
| 92 | M94A | Z | 0 | 0 | 0 %100 |
| 93 | MP3C | X | 4.761 | 4.761 | 0 %100 |
| 94 | MP3C | Z | -8.247 | -8.247 | 0 %100 |
| 95 | MP4C | X | 4.761 | 4.761 | 0 %100 |
| 96 | MP4C | Z | -8.247 | -8.247 | 0 %100 |
| 97 | MP2C | X | 4.761 | 4.761 | 0 %100 |
| 98 | MP2C | Z | -8.247 | -8.247 | 0 %100 |
| 99 | MP1C | X | 4.761 | 4.761 | 0 %100 |
| 100 | MP1C | Z | -8.247 | -8.247 | 0 %100 |
| 101 | MP3B | X | 4.761 | 4.761 | 0 %100 |
| 102 | MP3B | Z | -8.247 | -8.247 | 0 %100 |
| 103 | MP4B | X | 4.761 | 4.761 | 0 %100 |
| 104 | MP4B | Z | -8.247 | -8.247 | 0 %100 |
| 105 | MP2B | X | 4.761 | 4.761 | 0 %100 |
| 106 | MP2B | Z | -8.247 | -8.247 | 0 %100 |
| 107 | MP1B | X | 4.761 | 4.761 | 0 %100 |
| 108 | MP1B | Z | -8.247 | -8.247 | 0 %100 |
| 109 | M109 | X | 4.119 | 4.119 | 0 %100 |
| 110 | M109 | Z | -7.135 | -7.135 | 0 %100 |
| 111 | M112 | X | 4.119 | 4.119 | 0 %100 |
| 112 | M112 | Z | -7.135 | -7.135 | 0 %100 |
| 113 | M115 | X | 0 | 0 | 0 %100 |
| 114 | M115 | Z | 0 | 0 | 0 %100 |

Member Distributed Loads (BLC 43 : Structure Wo (60 Deg))

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | 3.002 | 3.002 | 0 %100 |
| 2 | M1 | Z | -1.733 | -1.733 | 0 %100 |
| 3 | M4 | X | 10.121 | 10.121 | 0 %100 |
| 4 | M4 | Z | -5.844 | -5.844 | 0 %100 |
| 5 | M10 | X | 2.838 | 2.838 | 0 %100 |
| 6 | M10 | Z | -1.639 | -1.639 | 0 %100 |
| 7 | MP3A | X | 8.247 | 8.247 | 0 %100 |
| 8 | MP3A | Z | -4.761 | -4.761 | 0 %100 |
| 9 | MP4A | X | 8.247 | 8.247 | 0 %100 |
| 10 | MP4A | Z | -4.761 | -4.761 | 0 %100 |
| 11 | MP2A | X | 8.247 | 8.247 | 0 %100 |
| 12 | MP2A | Z | -4.761 | -4.761 | 0 %100 |
| 13 | MP1A | X | 8.247 | 8.247 | 0 %100 |
| 14 | MP1A | Z | -4.761 | -4.761 | 0 %100 |
| 15 | M43 | X | 2.838 | 2.838 | 0 %100 |
| 16 | M43 | Z | -1.639 | -1.639 | 0 %100 |
| 17 | M46 | X | 5.209 | 5.209 | 0 %100 |
| 18 | M46 | Z | -3.007 | -3.007 | 0 %100 |
| 19 | M51B | X | 11.569 | 11.569 | 0 %100 |
| 20 | M51B | Z | -6.679 | -6.679 | 0 %100 |
| 21 | M52B | X | 2.892 | 2.892 | 0 %100 |
| 22 | M52B | Z | -1.67 | -1.67 | 0 %100 |
| 23 | M76 | X | 15.626 | 15.626 | 0 %100 |
| 24 | M76 | Z | -9.022 | -9.022 | 0 %100 |
| 25 | M77 | X | 21.221 | 21.221 | 0 %100 |
| 26 | M77 | Z | -12.252 | -12.252 | 0 %100 |
| 27 | M80 | X | 22.351 | 22.351 | 0 %100 |
| 28 | M80 | Z | -12.904 | -12.904 | 0 %100 |
| 29 | M84 | X | 15.626 | 15.626 | 0 %100 |
| 30 | M84 | Z | -9.022 | -9.022 | 0 %100 |
| 31 | M85 | X | 5.305 | 5.305 | 0 %100 |
| 32 | M85 | Z | -3.063 | -3.063 | 0 %100 |
| 33 | M91 | X | 5.588 | 5.588 | 0 %100 |
| 34 | M91 | Z | -3.226 | -3.226 | 0 %100 |
| 35 | M34 | X | 12.007 | 12.007 | 0 %100 |
| 36 | M34 | Z | -6.932 | -6.932 | 0 %100 |
| 37 | M43A | X | 3.002 | 3.002 | 0 %100 |
| 38 | M43A | Z | -1.733 | -1.733 | 0 %100 |
| 39 | M52A | X | 0 | 0 | 0 %100 |
| 40 | M52A | Z | 0 | 0 | 0 %100 |
| 41 | M53 | X | 11.353 | 11.353 | 0 %100 |
| 42 | M53 | Z | -6.555 | -6.555 | 0 %100 |
| 43 | M54 | X | 11.353 | 11.353 | 0 %100 |
| 44 | M54 | Z | -6.555 | -6.555 | 0 %100 |
| 45 | M55 | X | 20.835 | 20.835 | 0 %100 |
| 46 | M55 | Z | -12.029 | -12.029 | 0 %100 |
| 47 | M58A | X | 2.892 | 2.892 | 0 %100 |
| 48 | M58A | Z | -1.67 | -1.67 | 0 %100 |
| 49 | M59A | X | 2.892 | 2.892 | 0 %100 |
| 50 | M59A | Z | -1.67 | -1.67 | 0 %100 |
| 51 | M63 | X | 0 | 0 | 0 %100 |
| 52 | M63 | Z | 0 | 0 | 0 %100 |
| 53 | M64 | X | 5.305 | 5.305 | 0 %100 |
| 54 | M64 | Z | -3.063 | -3.063 | 0 %100 |
| 55 | M66 | X | 5.588 | 5.588 | 0 %100 |
| 56 | M66 | Z | -3.226 | -3.226 | 0 %100 |
| 57 | M68 | X | 0 | 0 | 0 %100 |

Member Distributed Loads (BLC 43 : Structure Wo (60 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft.%] | End Location[ft.%] | |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|------|
| 58 | M68 | Z | 0 | 0 | %100 | |
| 59 | M69 | X | 5.305 | 5.305 | 0 | %100 |
| 60 | M69 | Z | -3.063 | -3.063 | 0 | %100 |
| 61 | M71 | X | 5.588 | 5.588 | 0 | %100 |
| 62 | M71 | Z | -3.226 | -3.226 | 0 | %100 |
| 63 | M76A | X | 10.121 | 10.121 | 0 | %100 |
| 64 | M76A | Z | -5.844 | -5.844 | 0 | %100 |
| 65 | M77A | X | 2.838 | 2.838 | 0 | %100 |
| 66 | M77A | Z | -1.639 | -1.639 | 0 | %100 |
| 67 | M78 | X | 2.838 | 2.838 | 0 | %100 |
| 68 | M78 | Z | -1.639 | -1.639 | 0 | %100 |
| 69 | M79A | X | 5.209 | 5.209 | 0 | %100 |
| 70 | M79A | Z | -3.007 | -3.007 | 0 | %100 |
| 71 | M82 | X | 2.892 | 2.892 | 0 | %100 |
| 72 | M82 | Z | -1.67 | -1.67 | 0 | %100 |
| 73 | M83A | X | 11.569 | 11.569 | 0 | %100 |
| 74 | M83A | Z | -6.679 | -6.679 | 0 | %100 |
| 75 | M87 | X | 15.626 | 15.626 | 0 | %100 |
| 76 | M87 | Z | -9.022 | -9.022 | 0 | %100 |
| 77 | M88A | X | 5.305 | 5.305 | 0 | %100 |
| 78 | M88A | Z | -3.063 | -3.063 | 0 | %100 |
| 79 | M90 | X | 5.588 | 5.588 | 0 | %100 |
| 80 | M90 | Z | -3.226 | -3.226 | 0 | %100 |
| 81 | M92A | X | 15.626 | 15.626 | 0 | %100 |
| 82 | M92A | Z | -9.022 | -9.022 | 0 | %100 |
| 83 | M93 | X | 21.221 | 21.221 | 0 | %100 |
| 84 | M93 | Z | -12.252 | -12.252 | 0 | %100 |
| 85 | M95 | X | 22.351 | 22.351 | 0 | %100 |
| 86 | M95 | Z | -12.904 | -12.904 | 0 | %100 |
| 87 | M84B | X | 2.062 | 2.062 | 0 | %100 |
| 88 | M84B | Z | -1.19 | -1.19 | 0 | %100 |
| 89 | M89A | X | 8.247 | 8.247 | 0 | %100 |
| 90 | M89A | Z | -4.761 | -4.761 | 0 | %100 |
| 91 | M94A | X | 2.062 | 2.062 | 0 | %100 |
| 92 | M94A | Z | -1.19 | -1.19 | 0 | %100 |
| 93 | MP3C | X | 8.247 | 8.247 | 0 | %100 |
| 94 | MP3C | Z | -4.761 | -4.761 | 0 | %100 |
| 95 | MP4C | X | 8.247 | 8.247 | 0 | %100 |
| 96 | MP4C | Z | -4.761 | -4.761 | 0 | %100 |
| 97 | MP2C | X | 8.247 | 8.247 | 0 | %100 |
| 98 | MP2C | Z | -4.761 | -4.761 | 0 | %100 |
| 99 | MP1C | X | 8.247 | 8.247 | 0 | %100 |
| 100 | MP1C | Z | -4.761 | -4.761 | 0 | %100 |
| 101 | MP3B | X | 8.247 | 8.247 | 0 | %100 |
| 102 | MP3B | Z | -4.761 | -4.761 | 0 | %100 |
| 103 | MP4B | X | 8.247 | 8.247 | 0 | %100 |
| 104 | MP4B | Z | -4.761 | -4.761 | 0 | %100 |
| 105 | MP2B | X | 8.247 | 8.247 | 0 | %100 |
| 106 | MP2B | Z | -4.761 | -4.761 | 0 | %100 |
| 107 | MP1B | X | 8.247 | 8.247 | 0 | %100 |
| 108 | MP1B | Z | -4.761 | -4.761 | 0 | %100 |
| 109 | M109 | X | 2.378 | 2.378 | 0 | %100 |
| 110 | M109 | Z | -1.373 | -1.373 | 0 | %100 |
| 111 | M112 | X | 9.513 | 9.513 | 0 | %100 |
| 112 | M112 | Z | -5.492 | -5.492 | 0 | %100 |
| 113 | M115 | X | 2.378 | 2.378 | 0 | %100 |
| 114 | M115 | Z | -1.373 | -1.373 | 0 | %100 |

Member Distributed Loads (BLC 44 : Structure Wo (90 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k. | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | 0 | 0 | 0 | %100 |
| 2 | M1 | Z | 0 | 0 | 0 | %100 |
| 3 | M4 | X | 15.583 | 15.583 | 0 | %100 |
| 4 | M4 | Z | 0 | 0 | 0 | %100 |
| 5 | M10 | X | 0 | 0 | 0 | %100 |
| 6 | M10 | Z | 0 | 0 | 0 | %100 |
| 7 | MP3A | X | 9.523 | 9.523 | 0 | %100 |
| 8 | MP3A | Z | 0 | 0 | 0 | %100 |
| 9 | MP4A | X | 9.523 | 9.523 | 0 | %100 |
| 10 | MP4A | Z | 0 | 0 | 0 | %100 |
| 11 | MP2A | X | 9.523 | 9.523 | 0 | %100 |
| 12 | MP2A | Z | 0 | 0 | 0 | %100 |
| 13 | MP1A | X | 9.523 | 9.523 | 0 | %100 |
| 14 | MP1A | Z | 0 | 0 | 0 | %100 |
| 15 | M43 | X | 0 | 0 | 0 | %100 |
| 16 | M43 | Z | 0 | 0 | 0 | %100 |
| 17 | M46 | X | 0 | 0 | 0 | %100 |
| 18 | M46 | Z | 0 | 0 | 0 | %100 |
| 19 | M51B | X | 10.019 | 10.019 | 0 | %100 |
| 20 | M51B | Z | 0 | 0 | 0 | %100 |
| 21 | M52B | X | 10.019 | 10.019 | 0 | %100 |
| 22 | M52B | Z | 0 | 0 | 0 | %100 |
| 23 | M76 | X | 24.058 | 24.058 | 0 | %100 |
| 24 | M76 | Z | 0 | 0 | 0 | %100 |
| 25 | M77 | X | 18.378 | 18.378 | 0 | %100 |
| 26 | M77 | Z | 0 | 0 | 0 | %100 |
| 27 | M80 | X | 19.357 | 19.357 | 0 | %100 |
| 28 | M80 | Z | 0 | 0 | 0 | %100 |
| 29 | M84 | X | 24.058 | 24.058 | 0 | %100 |
| 30 | M84 | Z | 0 | 0 | 0 | %100 |
| 31 | M85 | X | 18.378 | 18.378 | 0 | %100 |
| 32 | M85 | Z | 0 | 0 | 0 | %100 |
| 33 | M91 | X | 19.357 | 19.357 | 0 | %100 |
| 34 | M91 | Z | 0 | 0 | 0 | %100 |
| 35 | M34 | X | 10.398 | 10.398 | 0 | %100 |
| 36 | M34 | Z | 0 | 0 | 0 | %100 |
| 37 | M43A | X | 10.398 | 10.398 | 0 | %100 |
| 38 | M43A | Z | 0 | 0 | 0 | %100 |
| 39 | M52A | X | 3.896 | 3.896 | 0 | %100 |
| 40 | M52A | Z | 0 | 0 | 0 | %100 |
| 41 | M53 | X | 9.832 | 9.832 | 0 | %100 |
| 42 | M53 | Z | 0 | 0 | 0 | %100 |
| 43 | M54 | X | 9.832 | 9.832 | 0 | %100 |
| 44 | M54 | Z | 0 | 0 | 0 | %100 |
| 45 | M55 | X | 18.043 | 18.043 | 0 | %100 |
| 46 | M55 | Z | 0 | 0 | 0 | %100 |
| 47 | M58A | X | 10.019 | 10.019 | 0 | %100 |
| 48 | M58A | Z | 0 | 0 | 0 | %100 |
| 49 | M59A | X | 0 | 0 | 0 | %100 |
| 50 | M59A | Z | 0 | 0 | 0 | %100 |
| 51 | M63 | X | 6.014 | 6.014 | 0 | %100 |
| 52 | M63 | Z | 0 | 0 | 0 | %100 |
| 53 | M64 | X | 18.378 | 18.378 | 0 | %100 |
| 54 | M64 | Z | 0 | 0 | 0 | %100 |
| 55 | M66 | X | 19.357 | 19.357 | 0 | %100 |
| 56 | M66 | Z | 0 | 0 | 0 | %100 |
| 57 | M68 | X | 6.014 | 6.014 | 0 | %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 44 : Structure Wo (90 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | 0 | 0 | %100 |
| 59 | M69 | X | 0 | 0 | %100 |
| 60 | M69 | Z | 0 | 0 | %100 |
| 61 | M71 | X | 0 | 0 | %100 |
| 62 | M71 | Z | 0 | 0 | %100 |
| 63 | M76A | X | 3.896 | 3.896 | %100 |
| 64 | M76A | Z | 0 | 0 | %100 |
| 65 | M77A | X | 9.832 | 9.832 | %100 |
| 66 | M77A | Z | 0 | 0 | %100 |
| 67 | M78 | X | 9.832 | 9.832 | %100 |
| 68 | M78 | Z | 0 | 0 | %100 |
| 69 | M79A | X | 18.043 | 18.043 | %100 |
| 70 | M79A | Z | 0 | 0 | %100 |
| 71 | M82 | X | 0 | 0 | %100 |
| 72 | M82 | Z | 0 | 0 | %100 |
| 73 | M83A | X | 10.019 | 10.019 | %100 |
| 74 | M83A | Z | 0 | 0 | %100 |
| 75 | M87 | X | 6.014 | 6.014 | %100 |
| 76 | M87 | Z | 0 | 0 | %100 |
| 77 | M88A | X | 0 | 0 | %100 |
| 78 | M88A | Z | 0 | 0 | %100 |
| 79 | M90 | X | 0 | 0 | %100 |
| 80 | M90 | Z | 0 | 0 | %100 |
| 81 | M92A | X | 6.014 | 6.014 | %100 |
| 82 | M92A | Z | 0 | 0 | %100 |
| 83 | M93 | X | 18.378 | 18.378 | %100 |
| 84 | M93 | Z | 0 | 0 | %100 |
| 85 | M95 | X | 19.357 | 19.357 | %100 |
| 86 | M95 | Z | 0 | 0 | %100 |
| 87 | M84B | X | 0 | 0 | %100 |
| 88 | M84B | Z | 0 | 0 | %100 |
| 89 | M89A | X | 7.142 | 7.142 | %100 |
| 90 | M89A | Z | 0 | 0 | %100 |
| 91 | M94A | X | 7.142 | 7.142 | %100 |
| 92 | M94A | Z | 0 | 0 | %100 |
| 93 | MP3C | X | 9.523 | 9.523 | %100 |
| 94 | MP3C | Z | 0 | 0 | %100 |
| 95 | MP4C | X | 9.523 | 9.523 | %100 |
| 96 | MP4C | Z | 0 | 0 | %100 |
| 97 | MP2C | X | 9.523 | 9.523 | %100 |
| 98 | MP2C | Z | 0 | 0 | %100 |
| 99 | MP1C | X | 9.523 | 9.523 | %100 |
| 100 | MP1C | Z | 0 | 0 | %100 |
| 101 | MP3B | X | 9.523 | 9.523 | %100 |
| 102 | MP3B | Z | 0 | 0 | %100 |
| 103 | MP4B | X | 9.523 | 9.523 | %100 |
| 104 | MP4B | Z | 0 | 0 | %100 |
| 105 | MP2B | X | 9.523 | 9.523 | %100 |
| 106 | MP2B | Z | 0 | 0 | %100 |
| 107 | MP1B | X | 9.523 | 9.523 | %100 |
| 108 | MP1B | Z | 0 | 0 | %100 |
| 109 | M109 | X | 0 | 0 | %100 |
| 110 | M109 | Z | 0 | 0 | %100 |
| 111 | M112 | X | 8.239 | 8.239 | %100 |
| 112 | M112 | Z | 0 | 0 | %100 |
| 113 | M115 | X | 8.239 | 8.239 | %100 |
| 114 | M115 | Z | 0 | 0 | %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 45 : Structure Wo (120 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | 3.002 | 3.002 | 0 | %100 |
| 2 | M1 | Z | 1.733 | 1.733 | 0 | %100 |
| 3 | M4 | X | 10.121 | 10.121 | 0 | %100 |
| 4 | M4 | Z | 5.844 | 5.844 | 0 | %100 |
| 5 | M10 | X | 2.838 | 2.838 | 0 | %100 |
| 6 | M10 | Z | 1.639 | 1.639 | 0 | %100 |
| 7 | MP3A | X | 8.247 | 8.247 | 0 | %100 |
| 8 | MP3A | Z | 4.761 | 4.761 | 0 | %100 |
| 9 | MP4A | X | 8.247 | 8.247 | 0 | %100 |
| 10 | MP4A | Z | 4.761 | 4.761 | 0 | %100 |
| 11 | MP2A | X | 8.247 | 8.247 | 0 | %100 |
| 12 | MP2A | Z | 4.761 | 4.761 | 0 | %100 |
| 13 | MP1A | X | 8.247 | 8.247 | 0 | %100 |
| 14 | MP1A | Z | 4.761 | 4.761 | 0 | %100 |
| 15 | M43 | X | 2.838 | 2.838 | 0 | %100 |
| 16 | M43 | Z | 1.639 | 1.639 | 0 | %100 |
| 17 | M46 | X | 5.209 | 5.209 | 0 | %100 |
| 18 | M46 | Z | 3.007 | 3.007 | 0 | %100 |
| 19 | M51B | X | 2.892 | 2.892 | 0 | %100 |
| 20 | M51B | Z | 1.67 | 1.67 | 0 | %100 |
| 21 | M52B | X | 11.569 | 11.569 | 0 | %100 |
| 22 | M52B | Z | 6.679 | 6.679 | 0 | %100 |
| 23 | M76 | X | 15.626 | 15.626 | 0 | %100 |
| 24 | M76 | Z | 9.022 | 9.022 | 0 | %100 |
| 25 | M77 | X | 5.305 | 5.305 | 0 | %100 |
| 26 | M77 | Z | 3.063 | 3.063 | 0 | %100 |
| 27 | M80 | X | 5.588 | 5.588 | 0 | %100 |
| 28 | M80 | Z | 3.226 | 3.226 | 0 | %100 |
| 29 | M84 | X | 15.626 | 15.626 | 0 | %100 |
| 30 | M84 | Z | 9.022 | 9.022 | 0 | %100 |
| 31 | M85 | X | 21.221 | 21.221 | 0 | %100 |
| 32 | M85 | Z | 12.252 | 12.252 | 0 | %100 |
| 33 | M91 | X | 22.351 | 22.351 | 0 | %100 |
| 34 | M91 | Z | 12.904 | 12.904 | 0 | %100 |
| 35 | M34 | X | 3.002 | 3.002 | 0 | %100 |
| 36 | M34 | Z | 1.733 | 1.733 | 0 | %100 |
| 37 | M43A | X | 12.007 | 12.007 | 0 | %100 |
| 38 | M43A | Z | 6.932 | 6.932 | 0 | %100 |
| 39 | M52A | X | 10.121 | 10.121 | 0 | %100 |
| 40 | M52A | Z | 5.844 | 5.844 | 0 | %100 |
| 41 | M53 | X | 2.838 | 2.838 | 0 | %100 |
| 42 | M53 | Z | 1.639 | 1.639 | 0 | %100 |
| 43 | M54 | X | 2.838 | 2.838 | 0 | %100 |
| 44 | M54 | Z | 1.639 | 1.639 | 0 | %100 |
| 45 | M55 | X | 5.209 | 5.209 | 0 | %100 |
| 46 | M55 | Z | 3.007 | 3.007 | 0 | %100 |
| 47 | M58A | X | 11.569 | 11.569 | 0 | %100 |
| 48 | M58A | Z | 6.679 | 6.679 | 0 | %100 |
| 49 | M59A | X | 2.892 | 2.892 | 0 | %100 |
| 50 | M59A | Z | 1.67 | 1.67 | 0 | %100 |
| 51 | M63 | X | 15.626 | 15.626 | 0 | %100 |
| 52 | M63 | Z | 9.022 | 9.022 | 0 | %100 |
| 53 | M64 | X | 21.221 | 21.221 | 0 | %100 |
| 54 | M64 | Z | 12.252 | 12.252 | 0 | %100 |
| 55 | M66 | X | 22.351 | 22.351 | 0 | %100 |
| 56 | M66 | Z | 12.904 | 12.904 | 0 | %100 |
| 57 | M68 | X | 15.626 | 15.626 | 0 | %100 |

Member Distributed Loads (BLC 45 : Structure Wo (120 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k. | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | 9.022 | 9.022 | 0 %100 |
| 59 | M69 | X | 5.305 | 5.305 | 0 %100 |
| 60 | M69 | Z | 3.063 | 3.063 | 0 %100 |
| 61 | M71 | X | 5.588 | 5.588 | 0 %100 |
| 62 | M71 | Z | 3.226 | 3.226 | 0 %100 |
| 63 | M76A | X | 0 | 0 | 0 %100 |
| 64 | M76A | Z | 0 | 0 | 0 %100 |
| 65 | M77A | X | 11.353 | 11.353 | 0 %100 |
| 66 | M77A | Z | 6.555 | 6.555 | 0 %100 |
| 67 | M78 | X | 11.353 | 11.353 | 0 %100 |
| 68 | M78 | Z | 6.555 | 6.555 | 0 %100 |
| 69 | M79A | X | 20.835 | 20.835 | 0 %100 |
| 70 | M79A | Z | 12.029 | 12.029 | 0 %100 |
| 71 | M82 | X | 2.892 | 2.892 | 0 %100 |
| 72 | M82 | Z | 1.67 | 1.67 | 0 %100 |
| 73 | M83A | X | 2.892 | 2.892 | 0 %100 |
| 74 | M83A | Z | 1.67 | 1.67 | 0 %100 |
| 75 | M87 | X | 0 | 0 | 0 %100 |
| 76 | M87 | Z | 0 | 0 | 0 %100 |
| 77 | M88A | X | 5.305 | 5.305 | 0 %100 |
| 78 | M88A | Z | 3.063 | 3.063 | 0 %100 |
| 79 | M90 | X | 5.588 | 5.588 | 0 %100 |
| 80 | M90 | Z | 3.226 | 3.226 | 0 %100 |
| 81 | M92A | X | 0 | 0 | 0 %100 |
| 82 | M92A | Z | 0 | 0 | 0 %100 |
| 83 | M93 | X | 5.305 | 5.305 | 0 %100 |
| 84 | M93 | Z | 3.063 | 3.063 | 0 %100 |
| 85 | M95 | X | 5.588 | 5.588 | 0 %100 |
| 86 | M95 | Z | 3.226 | 3.226 | 0 %100 |
| 87 | M84B | X | 2.062 | 2.062 | 0 %100 |
| 88 | M84B | Z | 1.19 | 1.19 | 0 %100 |
| 89 | M89A | X | 2.062 | 2.062 | 0 %100 |
| 90 | M89A | Z | 1.19 | 1.19 | 0 %100 |
| 91 | M94A | X | 8.247 | 8.247 | 0 %100 |
| 92 | M94A | Z | 4.761 | 4.761 | 0 %100 |
| 93 | MP3C | X | 8.247 | 8.247 | 0 %100 |
| 94 | MP3C | Z | 4.761 | 4.761 | 0 %100 |
| 95 | MP4C | X | 8.247 | 8.247 | 0 %100 |
| 96 | MP4C | Z | 4.761 | 4.761 | 0 %100 |
| 97 | MP2C | X | 8.247 | 8.247 | 0 %100 |
| 98 | MP2C | Z | 4.761 | 4.761 | 0 %100 |
| 99 | MP1C | X | 8.247 | 8.247 | 0 %100 |
| 100 | MP1C | Z | 4.761 | 4.761 | 0 %100 |
| 101 | MP3B | X | 8.247 | 8.247 | 0 %100 |
| 102 | MP3B | Z | 4.761 | 4.761 | 0 %100 |
| 103 | MP4B | X | 8.247 | 8.247 | 0 %100 |
| 104 | MP4B | Z | 4.761 | 4.761 | 0 %100 |
| 105 | MP2B | X | 8.247 | 8.247 | 0 %100 |
| 106 | MP2B | Z | 4.761 | 4.761 | 0 %100 |
| 107 | MP1B | X | 8.247 | 8.247 | 0 %100 |
| 108 | MP1B | Z | 4.761 | 4.761 | 0 %100 |
| 109 | M109 | X | 2.378 | 2.378 | 0 %100 |
| 110 | M109 | Z | 1.373 | 1.373 | 0 %100 |
| 111 | M112 | X | 2.378 | 2.378 | 0 %100 |
| 112 | M112 | Z | 1.373 | 1.373 | 0 %100 |
| 113 | M115 | X | 9.513 | 9.513 | 0 %100 |
| 114 | M115 | Z | 5.492 | 5.492 | 0 %100 |

Member Distributed Loads (BLC 46 : Structure Wo (150 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | 5.199 | 5.199 | 0 | %100 |
| 2 | M1 | Z | 9.005 | 9.005 | 0 | %100 |
| 3 | M4 | X | 1.948 | 1.948 | 0 | %100 |
| 4 | M4 | Z | 3.374 | 3.374 | 0 | %100 |
| 5 | M10 | X | 4.916 | 4.916 | 0 | %100 |
| 6 | M10 | Z | 8.515 | 8.515 | 0 | %100 |
| 7 | MP3A | X | 4.761 | 4.761 | 0 | %100 |
| 8 | MP3A | Z | 8.247 | 8.247 | 0 | %100 |
| 9 | MP4A | X | 4.761 | 4.761 | 0 | %100 |
| 10 | MP4A | Z | 8.247 | 8.247 | 0 | %100 |
| 11 | MP2A | X | 4.761 | 4.761 | 0 | %100 |
| 12 | MP2A | Z | 8.247 | 8.247 | 0 | %100 |
| 13 | MP1A | X | 4.761 | 4.761 | 0 | %100 |
| 14 | MP1A | Z | 8.247 | 8.247 | 0 | %100 |
| 15 | M43 | X | 4.916 | 4.916 | 0 | %100 |
| 16 | M43 | Z | 8.515 | 8.515 | 0 | %100 |
| 17 | M46 | X | 9.022 | 9.022 | 0 | %100 |
| 18 | M46 | Z | 15.626 | 15.626 | 0 | %100 |
| 19 | M51B | X | 0 | 0 | 0 | %100 |
| 20 | M51B | Z | 0 | 0 | 0 | %100 |
| 21 | M52B | X | 5.01 | 5.01 | 0 | %100 |
| 22 | M52B | Z | 8.677 | 8.677 | 0 | %100 |
| 23 | M76 | X | 3.007 | 3.007 | 0 | %100 |
| 24 | M76 | Z | 5.209 | 5.209 | 0 | %100 |
| 25 | M77 | X | 0 | 0 | 0 | %100 |
| 26 | M77 | Z | 0 | 0 | 0 | %100 |
| 27 | M80 | X | 0 | 0 | 0 | %100 |
| 28 | M80 | Z | 0 | 0 | 0 | %100 |
| 29 | M84 | X | 3.007 | 3.007 | 0 | %100 |
| 30 | M84 | Z | 5.209 | 5.209 | 0 | %100 |
| 31 | M85 | X | 9.189 | 9.189 | 0 | %100 |
| 32 | M85 | Z | 15.915 | 15.915 | 0 | %100 |
| 33 | M91 | X | 9.678 | 9.678 | 0 | %100 |
| 34 | M91 | Z | 16.763 | 16.763 | 0 | %100 |
| 35 | M34 | X | 0 | 0 | 0 | %100 |
| 36 | M34 | Z | 0 | 0 | 0 | %100 |
| 37 | M43A | X | 5.199 | 5.199 | 0 | %100 |
| 38 | M43A | Z | 9.005 | 9.005 | 0 | %100 |
| 39 | M52A | X | 7.791 | 7.791 | 0 | %100 |
| 40 | M52A | Z | 13.495 | 13.495 | 0 | %100 |
| 41 | M53 | X | 0 | 0 | 0 | %100 |
| 42 | M53 | Z | 0 | 0 | 0 | %100 |
| 43 | M54 | X | 0 | 0 | 0 | %100 |
| 44 | M54 | Z | 0 | 0 | 0 | %100 |
| 45 | M55 | X | 0 | 0 | 0 | %100 |
| 46 | M55 | Z | 0 | 0 | 0 | %100 |
| 47 | M58A | X | 5.01 | 5.01 | 0 | %100 |
| 48 | M58A | Z | 8.677 | 8.677 | 0 | %100 |
| 49 | M59A | X | 5.01 | 5.01 | 0 | %100 |
| 50 | M59A | Z | 8.677 | 8.677 | 0 | %100 |
| 51 | M63 | X | 12.029 | 12.029 | 0 | %100 |
| 52 | M63 | Z | 20.835 | 20.835 | 0 | %100 |
| 53 | M64 | X | 9.189 | 9.189 | 0 | %100 |
| 54 | M64 | Z | 15.915 | 15.915 | 0 | %100 |
| 55 | M66 | X | 9.678 | 9.678 | 0 | %100 |
| 56 | M66 | Z | 16.763 | 16.763 | 0 | %100 |
| 57 | M68 | X | 12.029 | 12.029 | 0 | %100 |

Member Distributed Loads (BLC 46 : Structure Wo (150 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 58 | M68 | Z | 20.835 | 20.835 | 0 %100 |
| 59 | M69 | X | 9.189 | 9.189 | 0 %100 |
| 60 | M69 | Z | 15.915 | 15.915 | 0 %100 |
| 61 | M71 | X | 9.678 | 9.678 | 0 %100 |
| 62 | M71 | Z | 16.763 | 16.763 | 0 %100 |
| 63 | M76A | X | 1.948 | 1.948 | 0 %100 |
| 64 | M76A | Z | 3.374 | 3.374 | 0 %100 |
| 65 | M77A | X | 4.916 | 4.916 | 0 %100 |
| 66 | M77A | Z | 8.515 | 8.515 | 0 %100 |
| 67 | M78 | X | 4.916 | 4.916 | 0 %100 |
| 68 | M78 | Z | 8.515 | 8.515 | 0 %100 |
| 69 | M79A | X | 9.022 | 9.022 | 0 %100 |
| 70 | M79A | Z | 15.626 | 15.626 | 0 %100 |
| 71 | M82 | X | 5.01 | 5.01 | 0 %100 |
| 72 | M82 | Z | 8.677 | 8.677 | 0 %100 |
| 73 | M83A | X | 0 | 0 | 0 %100 |
| 74 | M83A | Z | 0 | 0 | 0 %100 |
| 75 | M87 | X | 3.007 | 3.007 | 0 %100 |
| 76 | M87 | Z | 5.209 | 5.209 | 0 %100 |
| 77 | M88A | X | 9.189 | 9.189 | 0 %100 |
| 78 | M88A | Z | 15.915 | 15.915 | 0 %100 |
| 79 | M90 | X | 9.678 | 9.678 | 0 %100 |
| 80 | M90 | Z | 16.763 | 16.763 | 0 %100 |
| 81 | M92A | X | 3.007 | 3.007 | 0 %100 |
| 82 | M92A | Z | 5.209 | 5.209 | 0 %100 |
| 83 | M93 | X | 0 | 0 | 0 %100 |
| 84 | M93 | Z | 0 | 0 | 0 %100 |
| 85 | M95 | X | 0 | 0 | 0 %100 |
| 86 | M95 | Z | 0 | 0 | 0 %100 |
| 87 | M84B | X | 3.571 | 3.571 | 0 %100 |
| 88 | M84B | Z | 6.185 | 6.185 | 0 %100 |
| 89 | M89A | X | 0 | 0 | 0 %100 |
| 90 | M89A | Z | 0 | 0 | 0 %100 |
| 91 | M94A | X | 3.571 | 3.571 | 0 %100 |
| 92 | M94A | Z | 6.185 | 6.185 | 0 %100 |
| 93 | MP3C | X | 4.761 | 4.761 | 0 %100 |
| 94 | MP3C | Z | 8.247 | 8.247 | 0 %100 |
| 95 | MP4C | X | 4.761 | 4.761 | 0 %100 |
| 96 | MP4C | Z | 8.247 | 8.247 | 0 %100 |
| 97 | MP2C | X | 4.761 | 4.761 | 0 %100 |
| 98 | MP2C | Z | 8.247 | 8.247 | 0 %100 |
| 99 | MP1C | X | 4.761 | 4.761 | 0 %100 |
| 100 | MP1C | Z | 8.247 | 8.247 | 0 %100 |
| 101 | MP3B | X | 4.761 | 4.761 | 0 %100 |
| 102 | MP3B | Z | 8.247 | 8.247 | 0 %100 |
| 103 | MP4B | X | 4.761 | 4.761 | 0 %100 |
| 104 | MP4B | Z | 8.247 | 8.247 | 0 %100 |
| 105 | MP2B | X | 4.761 | 4.761 | 0 %100 |
| 106 | MP2B | Z | 8.247 | 8.247 | 0 %100 |
| 107 | MP1B | X | 4.761 | 4.761 | 0 %100 |
| 108 | MP1B | Z | 8.247 | 8.247 | 0 %100 |
| 109 | M109 | X | 4.119 | 4.119 | 0 %100 |
| 110 | M109 | Z | 7.135 | 7.135 | 0 %100 |
| 111 | M112 | X | 0 | 0 | 0 %100 |
| 112 | M112 | Z | 0 | 0 | 0 %100 |
| 113 | M115 | X | 4.119 | 4.119 | 0 %100 |
| 114 | M115 | Z | 7.135 | 7.135 | 0 %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 47 : Structure Wo (180 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 1 | M1 | X | 0 | 0 | 0 | %100 |
| 2 | M1 | Z | 13.864 | 13.864 | 0 | %100 |
| 3 | M4 | X | 0 | 0 | 0 | %100 |
| 4 | M4 | Z | 0 | 0 | 0 | %100 |
| 5 | M10 | X | 0 | 0 | 0 | %100 |
| 6 | M10 | Z | 13.109 | 13.109 | 0 | %100 |
| 7 | MP3A | X | 0 | 0 | 0 | %100 |
| 8 | MP3A | Z | 9.523 | 9.523 | 0 | %100 |
| 9 | MP4A | X | 0 | 0 | 0 | %100 |
| 10 | MP4A | Z | 9.523 | 9.523 | 0 | %100 |
| 11 | MP2A | X | 0 | 0 | 0 | %100 |
| 12 | MP2A | Z | 9.523 | 9.523 | 0 | %100 |
| 13 | MP1A | X | 0 | 0 | 0 | %100 |
| 14 | MP1A | Z | 9.523 | 9.523 | 0 | %100 |
| 15 | M43 | X | 0 | 0 | 0 | %100 |
| 16 | M43 | Z | 13.109 | 13.109 | 0 | %100 |
| 17 | M46 | X | 0 | 0 | 0 | %100 |
| 18 | M46 | Z | 24.058 | 24.058 | 0 | %100 |
| 19 | M51B | X | 0 | 0 | 0 | %100 |
| 20 | M51B | Z | 3.34 | 3.34 | 0 | %100 |
| 21 | M52B | X | 0 | 0 | 0 | %100 |
| 22 | M52B | Z | 3.34 | 3.34 | 0 | %100 |
| 23 | M76 | X | 0 | 0 | 0 | %100 |
| 24 | M76 | Z | 0 | 0 | 0 | %100 |
| 25 | M77 | X | 0 | 0 | 0 | %100 |
| 26 | M77 | Z | 6.126 | 6.126 | 0 | %100 |
| 27 | M80 | X | 0 | 0 | 0 | %100 |
| 28 | M80 | Z | 6.452 | 6.452 | 0 | %100 |
| 29 | M84 | X | 0 | 0 | 0 | %100 |
| 30 | M84 | Z | 0 | 0 | 0 | %100 |
| 31 | M85 | X | 0 | 0 | 0 | %100 |
| 32 | M85 | Z | 6.126 | 6.126 | 0 | %100 |
| 33 | M91 | X | 0 | 0 | 0 | %100 |
| 34 | M91 | Z | 6.452 | 6.452 | 0 | %100 |
| 35 | M34 | X | 0 | 0 | 0 | %100 |
| 36 | M34 | Z | 3.466 | 3.466 | 0 | %100 |
| 37 | M43A | X | 0 | 0 | 0 | %100 |
| 38 | M43A | Z | 3.466 | 3.466 | 0 | %100 |
| 39 | M52A | X | 0 | 0 | 0 | %100 |
| 40 | M52A | Z | 11.687 | 11.687 | 0 | %100 |
| 41 | M53 | X | 0 | 0 | 0 | %100 |
| 42 | M53 | Z | 3.277 | 3.277 | 0 | %100 |
| 43 | M54 | X | 0 | 0 | 0 | %100 |
| 44 | M54 | Z | 3.277 | 3.277 | 0 | %100 |
| 45 | M55 | X | 0 | 0 | 0 | %100 |
| 46 | M55 | Z | 6.014 | 6.014 | 0 | %100 |
| 47 | M58A | X | 0 | 0 | 0 | %100 |
| 48 | M58A | Z | 3.34 | 3.34 | 0 | %100 |
| 49 | M59A | X | 0 | 0 | 0 | %100 |
| 50 | M59A | Z | 13.359 | 13.359 | 0 | %100 |
| 51 | M63 | X | 0 | 0 | 0 | %100 |
| 52 | M63 | Z | 18.043 | 18.043 | 0 | %100 |
| 53 | M64 | X | 0 | 0 | 0 | %100 |
| 54 | M64 | Z | 6.126 | 6.126 | 0 | %100 |
| 55 | M66 | X | 0 | 0 | 0 | %100 |
| 56 | M66 | Z | 6.452 | 6.452 | 0 | %100 |
| 57 | M68 | X | 0 | 0 | 0 | %100 |

Member Distributed Loads (BLC 47 : Structure Wo (180 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 58 | M68 | Z | 18.043 | 18.043 | 0 %100 |
| 59 | M69 | X | 0 | 0 | 0 %100 |
| 60 | M69 | Z | 24.503 | 24.503 | 0 %100 |
| 61 | M71 | X | 0 | 0 | 0 %100 |
| 62 | M71 | Z | 25.809 | 25.809 | 0 %100 |
| 63 | M76A | X | 0 | 0 | 0 %100 |
| 64 | M76A | Z | 11.687 | 11.687 | 0 %100 |
| 65 | M77A | X | 0 | 0 | 0 %100 |
| 66 | M77A | Z | 3.277 | 3.277 | 0 %100 |
| 67 | M78 | X | 0 | 0 | 0 %100 |
| 68 | M78 | Z | 3.277 | 3.277 | 0 %100 |
| 69 | M79A | X | 0 | 0 | 0 %100 |
| 70 | M79A | Z | 6.014 | 6.014 | 0 %100 |
| 71 | M82 | X | 0 | 0 | 0 %100 |
| 72 | M82 | Z | 13.359 | 13.359 | 0 %100 |
| 73 | M83A | X | 0 | 0 | 0 %100 |
| 74 | M83A | Z | 3.34 | 3.34 | 0 %100 |
| 75 | M87 | X | 0 | 0 | 0 %100 |
| 76 | M87 | Z | 18.043 | 18.043 | 0 %100 |
| 77 | M88A | X | 0 | 0 | 0 %100 |
| 78 | M88A | Z | 24.503 | 24.503 | 0 %100 |
| 79 | M90 | X | 0 | 0 | 0 %100 |
| 80 | M90 | Z | 25.809 | 25.809 | 0 %100 |
| 81 | M92A | X | 0 | 0 | 0 %100 |
| 82 | M92A | Z | 18.043 | 18.043 | 0 %100 |
| 83 | M93 | X | 0 | 0 | 0 %100 |
| 84 | M93 | Z | 6.126 | 6.126 | 0 %100 |
| 85 | M95 | X | 0 | 0 | 0 %100 |
| 86 | M95 | Z | 6.452 | 6.452 | 0 %100 |
| 87 | M84B | X | 0 | 0 | 0 %100 |
| 88 | M84B | Z | 9.523 | 9.523 | 0 %100 |
| 89 | M89A | X | 0 | 0 | 0 %100 |
| 90 | M89A | Z | 2.381 | 2.381 | 0 %100 |
| 91 | M94A | X | 0 | 0 | 0 %100 |
| 92 | M94A | Z | 2.381 | 2.381 | 0 %100 |
| 93 | MP3C | X | 0 | 0 | 0 %100 |
| 94 | MP3C | Z | 9.523 | 9.523 | 0 %100 |
| 95 | MP4C | X | 0 | 0 | 0 %100 |
| 96 | MP4C | Z | 9.523 | 9.523 | 0 %100 |
| 97 | MP2C | X | 0 | 0 | 0 %100 |
| 98 | MP2C | Z | 9.523 | 9.523 | 0 %100 |
| 99 | MP1C | X | 0 | 0 | 0 %100 |
| 100 | MP1C | Z | 9.523 | 9.523 | 0 %100 |
| 101 | MP3B | X | 0 | 0 | 0 %100 |
| 102 | MP3B | Z | 9.523 | 9.523 | 0 %100 |
| 103 | MP4B | X | 0 | 0 | 0 %100 |
| 104 | MP4B | Z | 9.523 | 9.523 | 0 %100 |
| 105 | MP2B | X | 0 | 0 | 0 %100 |
| 106 | MP2B | Z | 9.523 | 9.523 | 0 %100 |
| 107 | MP1B | X | 0 | 0 | 0 %100 |
| 108 | MP1B | Z | 9.523 | 9.523 | 0 %100 |
| 109 | M109 | X | 0 | 0 | 0 %100 |
| 110 | M109 | Z | 10.985 | 10.985 | 0 %100 |
| 111 | M112 | X | 0 | 0 | 0 %100 |
| 112 | M112 | Z | 2.746 | 2.746 | 0 %100 |
| 113 | M115 | X | 0 | 0 | 0 %100 |
| 114 | M115 | Z | 2.746 | 2.746 | 0 %100 |

Member Distributed Loads (BLC 48 : Structure Wo (210 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | -5.199 | -5.199 | 0 | %100 |
| 2 | M1 | Z | 9.005 | 9.005 | 0 | %100 |
| 3 | M4 | X | -1.948 | -1.948 | 0 | %100 |
| 4 | M4 | Z | 3.374 | 3.374 | 0 | %100 |
| 5 | M10 | X | -4.916 | -4.916 | 0 | %100 |
| 6 | M10 | Z | 8.515 | 8.515 | 0 | %100 |
| 7 | MP3A | X | -4.761 | -4.761 | 0 | %100 |
| 8 | MP3A | Z | 8.247 | 8.247 | 0 | %100 |
| 9 | MP4A | X | -4.761 | -4.761 | 0 | %100 |
| 10 | MP4A | Z | 8.247 | 8.247 | 0 | %100 |
| 11 | MP2A | X | -4.761 | -4.761 | 0 | %100 |
| 12 | MP2A | Z | 8.247 | 8.247 | 0 | %100 |
| 13 | MP1A | X | -4.761 | -4.761 | 0 | %100 |
| 14 | MP1A | Z | 8.247 | 8.247 | 0 | %100 |
| 15 | M43 | X | -4.916 | -4.916 | 0 | %100 |
| 16 | M43 | Z | 8.515 | 8.515 | 0 | %100 |
| 17 | M46 | X | -9.022 | -9.022 | 0 | %100 |
| 18 | M46 | Z | 15.626 | 15.626 | 0 | %100 |
| 19 | M51B | X | -5.01 | -5.01 | 0 | %100 |
| 20 | M51B | Z | 8.677 | 8.677 | 0 | %100 |
| 21 | M52B | X | 0 | 0 | 0 | %100 |
| 22 | M52B | Z | 0 | 0 | 0 | %100 |
| 23 | M76 | X | -3.007 | -3.007 | 0 | %100 |
| 24 | M76 | Z | 5.209 | 5.209 | 0 | %100 |
| 25 | M77 | X | -9.189 | -9.189 | 0 | %100 |
| 26 | M77 | Z | 15.915 | 15.915 | 0 | %100 |
| 27 | M80 | X | -9.678 | -9.678 | 0 | %100 |
| 28 | M80 | Z | 16.763 | 16.763 | 0 | %100 |
| 29 | M84 | X | -3.007 | -3.007 | 0 | %100 |
| 30 | M84 | Z | 5.209 | 5.209 | 0 | %100 |
| 31 | M85 | X | 0 | 0 | 0 | %100 |
| 32 | M85 | Z | 0 | 0 | 0 | %100 |
| 33 | M91 | X | 0 | 0 | 0 | %100 |
| 34 | M91 | Z | 0 | 0 | 0 | %100 |
| 35 | M34 | X | -5.199 | -5.199 | 0 | %100 |
| 36 | M34 | Z | 9.005 | 9.005 | 0 | %100 |
| 37 | M43A | X | 0 | 0 | 0 | %100 |
| 38 | M43A | Z | 0 | 0 | 0 | %100 |
| 39 | M52A | X | -1.948 | -1.948 | 0 | %100 |
| 40 | M52A | Z | 3.374 | 3.374 | 0 | %100 |
| 41 | M53 | X | -4.916 | -4.916 | 0 | %100 |
| 42 | M53 | Z | 8.515 | 8.515 | 0 | %100 |
| 43 | M54 | X | -4.916 | -4.916 | 0 | %100 |
| 44 | M54 | Z | 8.515 | 8.515 | 0 | %100 |
| 45 | M55 | X | -9.022 | -9.022 | 0 | %100 |
| 46 | M55 | Z | 15.626 | 15.626 | 0 | %100 |
| 47 | M58A | X | 0 | 0 | 0 | %100 |
| 48 | M58A | Z | 0 | 0 | 0 | %100 |
| 49 | M59A | X | -5.01 | -5.01 | 0 | %100 |
| 50 | M59A | Z | 8.677 | 8.677 | 0 | %100 |
| 51 | M63 | X | -3.007 | -3.007 | 0 | %100 |
| 52 | M63 | Z | 5.209 | 5.209 | 0 | %100 |
| 53 | M64 | X | 0 | 0 | 0 | %100 |
| 54 | M64 | Z | 0 | 0 | 0 | %100 |
| 55 | M66 | X | 0 | 0 | 0 | %100 |
| 56 | M66 | Z | 0 | 0 | 0 | %100 |
| 57 | M68 | X | -3.007 | -3.007 | 0 | %100 |

Member Distributed Loads (BLC 48 : Structure Wo (210 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | 5.209 | 5.209 | 0 %100 |
| 59 | M69 | X | -9.189 | -9.189 | 0 %100 |
| 60 | M69 | Z | 15.915 | 15.915 | 0 %100 |
| 61 | M71 | X | -9.678 | -9.678 | 0 %100 |
| 62 | M71 | Z | 16.763 | 16.763 | 0 %100 |
| 63 | M76A | X | -7.791 | -7.791 | 0 %100 |
| 64 | M76A | Z | 13.495 | 13.495 | 0 %100 |
| 65 | M77A | X | 0 | 0 | 0 %100 |
| 66 | M77A | Z | 0 | 0 | 0 %100 |
| 67 | M78 | X | 0 | 0 | 0 %100 |
| 68 | M78 | Z | 0 | 0 | 0 %100 |
| 69 | M79A | X | 0 | 0 | 0 %100 |
| 70 | M79A | Z | 0 | 0 | 0 %100 |
| 71 | M82 | X | -5.01 | -5.01 | 0 %100 |
| 72 | M82 | Z | 8.677 | 8.677 | 0 %100 |
| 73 | M83A | X | -5.01 | -5.01 | 0 %100 |
| 74 | M83A | Z | 8.677 | 8.677 | 0 %100 |
| 75 | M87 | X | -12.029 | -12.029 | 0 %100 |
| 76 | M87 | Z | 20.835 | 20.835 | 0 %100 |
| 77 | M88A | X | -9.189 | -9.189 | 0 %100 |
| 78 | M88A | Z | 15.915 | 15.915 | 0 %100 |
| 79 | M90 | X | -9.678 | -9.678 | 0 %100 |
| 80 | M90 | Z | 16.763 | 16.763 | 0 %100 |
| 81 | M92A | X | -12.029 | -12.029 | 0 %100 |
| 82 | M92A | Z | 20.835 | 20.835 | 0 %100 |
| 83 | M93 | X | -9.189 | -9.189 | 0 %100 |
| 84 | M93 | Z | 15.915 | 15.915 | 0 %100 |
| 85 | M95 | X | -9.678 | -9.678 | 0 %100 |
| 86 | M95 | Z | 16.763 | 16.763 | 0 %100 |
| 87 | M84B | X | -3.571 | -3.571 | 0 %100 |
| 88 | M84B | Z | 6.185 | 6.185 | 0 %100 |
| 89 | M89A | X | -3.571 | -3.571 | 0 %100 |
| 90 | M89A | Z | 6.185 | 6.185 | 0 %100 |
| 91 | M94A | X | 0 | 0 | 0 %100 |
| 92 | M94A | Z | 0 | 0 | 0 %100 |
| 93 | MP3C | X | -4.761 | -4.761 | 0 %100 |
| 94 | MP3C | Z | 8.247 | 8.247 | 0 %100 |
| 95 | MP4C | X | -4.761 | -4.761 | 0 %100 |
| 96 | MP4C | Z | 8.247 | 8.247 | 0 %100 |
| 97 | MP2C | X | -4.761 | -4.761 | 0 %100 |
| 98 | MP2C | Z | 8.247 | 8.247 | 0 %100 |
| 99 | MP1C | X | -4.761 | -4.761 | 0 %100 |
| 100 | MP1C | Z | 8.247 | 8.247 | 0 %100 |
| 101 | MP3B | X | -4.761 | -4.761 | 0 %100 |
| 102 | MP3B | Z | 8.247 | 8.247 | 0 %100 |
| 103 | MP4B | X | -4.761 | -4.761 | 0 %100 |
| 104 | MP4B | Z | 8.247 | 8.247 | 0 %100 |
| 105 | MP2B | X | -4.761 | -4.761 | 0 %100 |
| 106 | MP2B | Z | 8.247 | 8.247 | 0 %100 |
| 107 | MP1B | X | -4.761 | -4.761 | 0 %100 |
| 108 | MP1B | Z | 8.247 | 8.247 | 0 %100 |
| 109 | M109 | X | -4.119 | -4.119 | 0 %100 |
| 110 | M109 | Z | 7.135 | 7.135 | 0 %100 |
| 111 | M112 | X | -4.119 | -4.119 | 0 %100 |
| 112 | M112 | Z | 7.135 | 7.135 | 0 %100 |
| 113 | M115 | X | 0 | 0 | 0 %100 |
| 114 | M115 | Z | 0 | 0 | 0 %100 |

Member Distributed Loads (BLC 49 : Structure Wo (240 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft,F,ksf] | End Magnitude[lb/ft,F,k] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | -3.002 | -3.002 | 0 | %100 |
| 2 | M1 | Z | 1.733 | 1.733 | 0 | %100 |
| 3 | M4 | X | -10.121 | -10.121 | 0 | %100 |
| 4 | M4 | Z | 5.844 | 5.844 | 0 | %100 |
| 5 | M10 | X | -2.838 | -2.838 | 0 | %100 |
| 6 | M10 | Z | 1.639 | 1.639 | 0 | %100 |
| 7 | MP3A | X | -8.247 | -8.247 | 0 | %100 |
| 8 | MP3A | Z | 4.761 | 4.761 | 0 | %100 |
| 9 | MP4A | X | -8.247 | -8.247 | 0 | %100 |
| 10 | MP4A | Z | 4.761 | 4.761 | 0 | %100 |
| 11 | MP2A | X | -8.247 | -8.247 | 0 | %100 |
| 12 | MP2A | Z | 4.761 | 4.761 | 0 | %100 |
| 13 | MP1A | X | -8.247 | -8.247 | 0 | %100 |
| 14 | MP1A | Z | 4.761 | 4.761 | 0 | %100 |
| 15 | M43 | X | -2.838 | -2.838 | 0 | %100 |
| 16 | M43 | Z | 1.639 | 1.639 | 0 | %100 |
| 17 | M46 | X | -5.209 | -5.209 | 0 | %100 |
| 18 | M46 | Z | 3.007 | 3.007 | 0 | %100 |
| 19 | M51B | X | -11.569 | -11.569 | 0 | %100 |
| 20 | M51B | Z | 6.679 | 6.679 | 0 | %100 |
| 21 | M52B | X | -2.892 | -2.892 | 0 | %100 |
| 22 | M52B | Z | 1.67 | 1.67 | 0 | %100 |
| 23 | M76 | X | -15.626 | -15.626 | 0 | %100 |
| 24 | M76 | Z | 9.022 | 9.022 | 0 | %100 |
| 25 | M77 | X | -21.221 | -21.221 | 0 | %100 |
| 26 | M77 | Z | 12.252 | 12.252 | 0 | %100 |
| 27 | M80 | X | -22.351 | -22.351 | 0 | %100 |
| 28 | M80 | Z | 12.904 | 12.904 | 0 | %100 |
| 29 | M84 | X | -15.626 | -15.626 | 0 | %100 |
| 30 | M84 | Z | 9.022 | 9.022 | 0 | %100 |
| 31 | M85 | X | -5.305 | -5.305 | 0 | %100 |
| 32 | M85 | Z | 3.063 | 3.063 | 0 | %100 |
| 33 | M91 | X | -5.588 | -5.588 | 0 | %100 |
| 34 | M91 | Z | 3.226 | 3.226 | 0 | %100 |
| 35 | M34 | X | -12.007 | -12.007 | 0 | %100 |
| 36 | M34 | Z | 6.932 | 6.932 | 0 | %100 |
| 37 | M43A | X | -3.002 | -3.002 | 0 | %100 |
| 38 | M43A | Z | 1.733 | 1.733 | 0 | %100 |
| 39 | M52A | X | 0 | 0 | 0 | %100 |
| 40 | M52A | Z | 0 | 0 | 0 | %100 |
| 41 | M53 | X | -11.353 | -11.353 | 0 | %100 |
| 42 | M53 | Z | 6.555 | 6.555 | 0 | %100 |
| 43 | M54 | X | -11.353 | -11.353 | 0 | %100 |
| 44 | M54 | Z | 6.555 | 6.555 | 0 | %100 |
| 45 | M55 | X | -20.835 | -20.835 | 0 | %100 |
| 46 | M55 | Z | 12.029 | 12.029 | 0 | %100 |
| 47 | M58A | X | -2.892 | -2.892 | 0 | %100 |
| 48 | M58A | Z | 1.67 | 1.67 | 0 | %100 |
| 49 | M59A | X | -2.892 | -2.892 | 0 | %100 |
| 50 | M59A | Z | 1.67 | 1.67 | 0 | %100 |
| 51 | M63 | X | 0 | 0 | 0 | %100 |
| 52 | M63 | Z | 0 | 0 | 0 | %100 |
| 53 | M64 | X | -5.305 | -5.305 | 0 | %100 |
| 54 | M64 | Z | 3.063 | 3.063 | 0 | %100 |
| 55 | M66 | X | -5.588 | -5.588 | 0 | %100 |
| 56 | M66 | Z | 3.226 | 3.226 | 0 | %100 |
| 57 | M68 | X | 0 | 0 | 0 | %100 |

Member Distributed Loads (BLC 49 : Structure Wo (240 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] | |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|------|
| 58 | M68 | Z | 0 | 0 | %100 | |
| 59 | M69 | X | -5.305 | -5.305 | 0 | %100 |
| 60 | M69 | Z | 3.063 | 3.063 | 0 | %100 |
| 61 | M71 | X | -5.588 | -5.588 | 0 | %100 |
| 62 | M71 | Z | 3.226 | 3.226 | 0 | %100 |
| 63 | M76A | X | -10.121 | -10.121 | 0 | %100 |
| 64 | M76A | Z | 5.844 | 5.844 | 0 | %100 |
| 65 | M77A | X | -2.838 | -2.838 | 0 | %100 |
| 66 | M77A | Z | 1.639 | 1.639 | 0 | %100 |
| 67 | M78 | X | -2.838 | -2.838 | 0 | %100 |
| 68 | M78 | Z | 1.639 | 1.639 | 0 | %100 |
| 69 | M79A | X | -5.209 | -5.209 | 0 | %100 |
| 70 | M79A | Z | 3.007 | 3.007 | 0 | %100 |
| 71 | M82 | X | -2.892 | -2.892 | 0 | %100 |
| 72 | M82 | Z | 1.67 | 1.67 | 0 | %100 |
| 73 | M83A | X | -11.569 | -11.569 | 0 | %100 |
| 74 | M83A | Z | 6.679 | 6.679 | 0 | %100 |
| 75 | M87 | X | -15.626 | -15.626 | 0 | %100 |
| 76 | M87 | Z | 9.022 | 9.022 | 0 | %100 |
| 77 | M88A | X | -5.305 | -5.305 | 0 | %100 |
| 78 | M88A | Z | 3.063 | 3.063 | 0 | %100 |
| 79 | M90 | X | -5.588 | -5.588 | 0 | %100 |
| 80 | M90 | Z | 3.226 | 3.226 | 0 | %100 |
| 81 | M92A | X | -15.626 | -15.626 | 0 | %100 |
| 82 | M92A | Z | 9.022 | 9.022 | 0 | %100 |
| 83 | M93 | X | -21.221 | -21.221 | 0 | %100 |
| 84 | M93 | Z | 12.252 | 12.252 | 0 | %100 |
| 85 | M95 | X | -22.351 | -22.351 | 0 | %100 |
| 86 | M95 | Z | 12.904 | 12.904 | 0 | %100 |
| 87 | M84B | X | -2.062 | -2.062 | 0 | %100 |
| 88 | M84B | Z | 1.19 | 1.19 | 0 | %100 |
| 89 | M89A | X | -8.247 | -8.247 | 0 | %100 |
| 90 | M89A | Z | 4.761 | 4.761 | 0 | %100 |
| 91 | M94A | X | -2.062 | -2.062 | 0 | %100 |
| 92 | M94A | Z | 1.19 | 1.19 | 0 | %100 |
| 93 | MP3C | X | -8.247 | -8.247 | 0 | %100 |
| 94 | MP3C | Z | 4.761 | 4.761 | 0 | %100 |
| 95 | MP4C | X | -8.247 | -8.247 | 0 | %100 |
| 96 | MP4C | Z | 4.761 | 4.761 | 0 | %100 |
| 97 | MP2C | X | -8.247 | -8.247 | 0 | %100 |
| 98 | MP2C | Z | 4.761 | 4.761 | 0 | %100 |
| 99 | MP1C | X | -8.247 | -8.247 | 0 | %100 |
| 100 | MP1C | Z | 4.761 | 4.761 | 0 | %100 |
| 101 | MP3B | X | -8.247 | -8.247 | 0 | %100 |
| 102 | MP3B | Z | 4.761 | 4.761 | 0 | %100 |
| 103 | MP4B | X | -8.247 | -8.247 | 0 | %100 |
| 104 | MP4B | Z | 4.761 | 4.761 | 0 | %100 |
| 105 | MP2B | X | -8.247 | -8.247 | 0 | %100 |
| 106 | MP2B | Z | 4.761 | 4.761 | 0 | %100 |
| 107 | MP1B | X | -8.247 | -8.247 | 0 | %100 |
| 108 | MP1B | Z | 4.761 | 4.761 | 0 | %100 |
| 109 | M109 | X | -2.378 | -2.378 | 0 | %100 |
| 110 | M109 | Z | 1.373 | 1.373 | 0 | %100 |
| 111 | M112 | X | -9.513 | -9.513 | 0 | %100 |
| 112 | M112 | Z | 5.492 | 5.492 | 0 | %100 |
| 113 | M115 | X | -2.378 | -2.378 | 0 | %100 |
| 114 | M115 | Z | 1.373 | 1.373 | 0 | %100 |

Member Distributed Loads (BLC 50 : Structure Wo (270 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 1 | M1 | X | 0 | 0 | 0 | %100 |
| 2 | M1 | Z | 0 | 0 | 0 | %100 |
| 3 | M4 | X | -15.583 | -15.583 | 0 | %100 |
| 4 | M4 | Z | 0 | 0 | 0 | %100 |
| 5 | M10 | X | 0 | 0 | 0 | %100 |
| 6 | M10 | Z | 0 | 0 | 0 | %100 |
| 7 | MP3A | X | -9.523 | -9.523 | 0 | %100 |
| 8 | MP3A | Z | 0 | 0 | 0 | %100 |
| 9 | MP4A | X | -9.523 | -9.523 | 0 | %100 |
| 10 | MP4A | Z | 0 | 0 | 0 | %100 |
| 11 | MP2A | X | -9.523 | -9.523 | 0 | %100 |
| 12 | MP2A | Z | 0 | 0 | 0 | %100 |
| 13 | MP1A | X | -9.523 | -9.523 | 0 | %100 |
| 14 | MP1A | Z | 0 | 0 | 0 | %100 |
| 15 | M43 | X | 0 | 0 | 0 | %100 |
| 16 | M43 | Z | 0 | 0 | 0 | %100 |
| 17 | M46 | X | 0 | 0 | 0 | %100 |
| 18 | M46 | Z | 0 | 0 | 0 | %100 |
| 19 | M51B | X | -10.019 | -10.019 | 0 | %100 |
| 20 | M51B | Z | 0 | 0 | 0 | %100 |
| 21 | M52B | X | -10.019 | -10.019 | 0 | %100 |
| 22 | M52B | Z | 0 | 0 | 0 | %100 |
| 23 | M76 | X | -24.058 | -24.058 | 0 | %100 |
| 24 | M76 | Z | 0 | 0 | 0 | %100 |
| 25 | M77 | X | -18.378 | -18.378 | 0 | %100 |
| 26 | M77 | Z | 0 | 0 | 0 | %100 |
| 27 | M80 | X | -19.357 | -19.357 | 0 | %100 |
| 28 | M80 | Z | 0 | 0 | 0 | %100 |
| 29 | M84 | X | -24.058 | -24.058 | 0 | %100 |
| 30 | M84 | Z | 0 | 0 | 0 | %100 |
| 31 | M85 | X | -18.378 | -18.378 | 0 | %100 |
| 32 | M85 | Z | 0 | 0 | 0 | %100 |
| 33 | M91 | X | -19.357 | -19.357 | 0 | %100 |
| 34 | M91 | Z | 0 | 0 | 0 | %100 |
| 35 | M34 | X | -10.398 | -10.398 | 0 | %100 |
| 36 | M34 | Z | 0 | 0 | 0 | %100 |
| 37 | M43A | X | -10.398 | -10.398 | 0 | %100 |
| 38 | M43A | Z | 0 | 0 | 0 | %100 |
| 39 | M52A | X | -3.896 | -3.896 | 0 | %100 |
| 40 | M52A | Z | 0 | 0 | 0 | %100 |
| 41 | M53 | X | -9.832 | -9.832 | 0 | %100 |
| 42 | M53 | Z | 0 | 0 | 0 | %100 |
| 43 | M54 | X | -9.832 | -9.832 | 0 | %100 |
| 44 | M54 | Z | 0 | 0 | 0 | %100 |
| 45 | M55 | X | -18.043 | -18.043 | 0 | %100 |
| 46 | M55 | Z | 0 | 0 | 0 | %100 |
| 47 | M58A | X | -10.019 | -10.019 | 0 | %100 |
| 48 | M58A | Z | 0 | 0 | 0 | %100 |
| 49 | M59A | X | 0 | 0 | 0 | %100 |
| 50 | M59A | Z | 0 | 0 | 0 | %100 |
| 51 | M63 | X | -6.014 | -6.014 | 0 | %100 |
| 52 | M63 | Z | 0 | 0 | 0 | %100 |
| 53 | M64 | X | -18.378 | -18.378 | 0 | %100 |
| 54 | M64 | Z | 0 | 0 | 0 | %100 |
| 55 | M66 | X | -19.357 | -19.357 | 0 | %100 |
| 56 | M66 | Z | 0 | 0 | 0 | %100 |
| 57 | M68 | X | -6.014 | -6.014 | 0 | %100 |

Member Distributed Loads (BLC 50 : Structure Wo (270 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k... | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 58 | M68 | Z | 0 | 0 | %100 |
| 59 | M69 | X | 0 | 0 | %100 |
| 60 | M69 | Z | 0 | 0 | %100 |
| 61 | M71 | X | 0 | 0 | %100 |
| 62 | M71 | Z | 0 | 0 | %100 |
| 63 | M76A | X | -3.896 | -3.896 | %100 |
| 64 | M76A | Z | 0 | 0 | %100 |
| 65 | M77A | X | -9.832 | -9.832 | %100 |
| 66 | M77A | Z | 0 | 0 | %100 |
| 67 | M78 | X | -9.832 | -9.832 | %100 |
| 68 | M78 | Z | 0 | 0 | %100 |
| 69 | M79A | X | -18.043 | -18.043 | %100 |
| 70 | M79A | Z | 0 | 0 | %100 |
| 71 | M82 | X | 0 | 0 | %100 |
| 72 | M82 | Z | 0 | 0 | %100 |
| 73 | M83A | X | -10.019 | -10.019 | %100 |
| 74 | M83A | Z | 0 | 0 | %100 |
| 75 | M87 | X | -6.014 | -6.014 | %100 |
| 76 | M87 | Z | 0 | 0 | %100 |
| 77 | M88A | X | 0 | 0 | %100 |
| 78 | M88A | Z | 0 | 0 | %100 |
| 79 | M90 | X | 0 | 0 | %100 |
| 80 | M90 | Z | 0 | 0 | %100 |
| 81 | M92A | X | -6.014 | -6.014 | %100 |
| 82 | M92A | Z | 0 | 0 | %100 |
| 83 | M93 | X | -18.378 | -18.378 | %100 |
| 84 | M93 | Z | 0 | 0 | %100 |
| 85 | M95 | X | -19.357 | -19.357 | %100 |
| 86 | M95 | Z | 0 | 0 | %100 |
| 87 | M84B | X | 0 | 0 | %100 |
| 88 | M84B | Z | 0 | 0 | %100 |
| 89 | M89A | X | -7.142 | -7.142 | %100 |
| 90 | M89A | Z | 0 | 0 | %100 |
| 91 | M94A | X | -7.142 | -7.142 | %100 |
| 92 | M94A | Z | 0 | 0 | %100 |
| 93 | MP3C | X | -9.523 | -9.523 | %100 |
| 94 | MP3C | Z | 0 | 0 | %100 |
| 95 | MP4C | X | -9.523 | -9.523 | %100 |
| 96 | MP4C | Z | 0 | 0 | %100 |
| 97 | MP2C | X | -9.523 | -9.523 | %100 |
| 98 | MP2C | Z | 0 | 0 | %100 |
| 99 | MP1C | X | -9.523 | -9.523 | %100 |
| 100 | MP1C | Z | 0 | 0 | %100 |
| 101 | MP3B | X | -9.523 | -9.523 | %100 |
| 102 | MP3B | Z | 0 | 0 | %100 |
| 103 | MP4B | X | -9.523 | -9.523 | %100 |
| 104 | MP4B | Z | 0 | 0 | %100 |
| 105 | MP2B | X | -9.523 | -9.523 | %100 |
| 106 | MP2B | Z | 0 | 0 | %100 |
| 107 | MP1B | X | -9.523 | -9.523 | %100 |
| 108 | MP1B | Z | 0 | 0 | %100 |
| 109 | M109 | X | 0 | 0 | %100 |
| 110 | M109 | Z | 0 | 0 | %100 |
| 111 | M112 | X | -8.239 | -8.239 | %100 |
| 112 | M112 | Z | 0 | 0 | %100 |
| 113 | M115 | X | -8.239 | -8.239 | %100 |
| 114 | M115 | Z | 0 | 0 | %100 |

Member Distributed Loads (BLC 51 : Structure Wo (300 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | -3.002 | -3.002 | 0 | %100 |
| 2 | M1 | Z | -1.733 | -1.733 | 0 | %100 |
| 3 | M4 | X | -10.121 | -10.121 | 0 | %100 |
| 4 | M4 | Z | -5.844 | -5.844 | 0 | %100 |
| 5 | M10 | X | -2.838 | -2.838 | 0 | %100 |
| 6 | M10 | Z | -1.639 | -1.639 | 0 | %100 |
| 7 | MP3A | X | -8.247 | -8.247 | 0 | %100 |
| 8 | MP3A | Z | -4.761 | -4.761 | 0 | %100 |
| 9 | MP4A | X | -8.247 | -8.247 | 0 | %100 |
| 10 | MP4A | Z | -4.761 | -4.761 | 0 | %100 |
| 11 | MP2A | X | -8.247 | -8.247 | 0 | %100 |
| 12 | MP2A | Z | -4.761 | -4.761 | 0 | %100 |
| 13 | MP1A | X | -8.247 | -8.247 | 0 | %100 |
| 14 | MP1A | Z | -4.761 | -4.761 | 0 | %100 |
| 15 | M43 | X | -2.838 | -2.838 | 0 | %100 |
| 16 | M43 | Z | -1.639 | -1.639 | 0 | %100 |
| 17 | M46 | X | -5.209 | -5.209 | 0 | %100 |
| 18 | M46 | Z | -3.007 | -3.007 | 0 | %100 |
| 19 | M51B | X | -2.892 | -2.892 | 0 | %100 |
| 20 | M51B | Z | -1.67 | -1.67 | 0 | %100 |
| 21 | M52B | X | -11.569 | -11.569 | 0 | %100 |
| 22 | M52B | Z | -6.679 | -6.679 | 0 | %100 |
| 23 | M76 | X | -15.626 | -15.626 | 0 | %100 |
| 24 | M76 | Z | -9.022 | -9.022 | 0 | %100 |
| 25 | M77 | X | -5.305 | -5.305 | 0 | %100 |
| 26 | M77 | Z | -3.063 | -3.063 | 0 | %100 |
| 27 | M80 | X | -5.588 | -5.588 | 0 | %100 |
| 28 | M80 | Z | -3.226 | -3.226 | 0 | %100 |
| 29 | M84 | X | -15.626 | -15.626 | 0 | %100 |
| 30 | M84 | Z | -9.022 | -9.022 | 0 | %100 |
| 31 | M85 | X | -21.221 | -21.221 | 0 | %100 |
| 32 | M85 | Z | -12.252 | -12.252 | 0 | %100 |
| 33 | M91 | X | -22.351 | -22.351 | 0 | %100 |
| 34 | M91 | Z | -12.904 | -12.904 | 0 | %100 |
| 35 | M34 | X | -3.002 | -3.002 | 0 | %100 |
| 36 | M34 | Z | -1.733 | -1.733 | 0 | %100 |
| 37 | M43A | X | -12.007 | -12.007 | 0 | %100 |
| 38 | M43A | Z | -6.932 | -6.932 | 0 | %100 |
| 39 | M52A | X | -10.121 | -10.121 | 0 | %100 |
| 40 | M52A | Z | -5.844 | -5.844 | 0 | %100 |
| 41 | M53 | X | -2.838 | -2.838 | 0 | %100 |
| 42 | M53 | Z | -1.639 | -1.639 | 0 | %100 |
| 43 | M54 | X | -2.838 | -2.838 | 0 | %100 |
| 44 | M54 | Z | -1.639 | -1.639 | 0 | %100 |
| 45 | M55 | X | -5.209 | -5.209 | 0 | %100 |
| 46 | M55 | Z | -3.007 | -3.007 | 0 | %100 |
| 47 | M58A | X | -11.569 | -11.569 | 0 | %100 |
| 48 | M58A | Z | -6.679 | -6.679 | 0 | %100 |
| 49 | M59A | X | -2.892 | -2.892 | 0 | %100 |
| 50 | M59A | Z | -1.67 | -1.67 | 0 | %100 |
| 51 | M63 | X | -15.626 | -15.626 | 0 | %100 |
| 52 | M63 | Z | -9.022 | -9.022 | 0 | %100 |
| 53 | M64 | X | -21.221 | -21.221 | 0 | %100 |
| 54 | M64 | Z | -12.252 | -12.252 | 0 | %100 |
| 55 | M66 | X | -22.351 | -22.351 | 0 | %100 |
| 56 | M66 | Z | -12.904 | -12.904 | 0 | %100 |
| 57 | M68 | X | -15.626 | -15.626 | 0 | %100 |

Member Distributed Loads (BLC 51 : Structure Wo (300 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | -9.022 | -9.022 | 0 %100 |
| 59 | M69 | X | -5.305 | -5.305 | 0 %100 |
| 60 | M69 | Z | -3.063 | -3.063 | 0 %100 |
| 61 | M71 | X | -5.588 | -5.588 | 0 %100 |
| 62 | M71 | Z | -3.226 | -3.226 | 0 %100 |
| 63 | M76A | X | 0 | 0 | 0 %100 |
| 64 | M76A | Z | 0 | 0 | 0 %100 |
| 65 | M77A | X | -11.353 | -11.353 | 0 %100 |
| 66 | M77A | Z | -6.555 | -6.555 | 0 %100 |
| 67 | M78 | X | -11.353 | -11.353 | 0 %100 |
| 68 | M78 | Z | -6.555 | -6.555 | 0 %100 |
| 69 | M79A | X | -20.835 | -20.835 | 0 %100 |
| 70 | M79A | Z | -12.029 | -12.029 | 0 %100 |
| 71 | M82 | X | -2.892 | -2.892 | 0 %100 |
| 72 | M82 | Z | -1.67 | -1.67 | 0 %100 |
| 73 | M83A | X | -2.892 | -2.892 | 0 %100 |
| 74 | M83A | Z | -1.67 | -1.67 | 0 %100 |
| 75 | M87 | X | 0 | 0 | 0 %100 |
| 76 | M87 | Z | 0 | 0 | 0 %100 |
| 77 | M88A | X | -5.305 | -5.305 | 0 %100 |
| 78 | M88A | Z | -3.063 | -3.063 | 0 %100 |
| 79 | M90 | X | -5.588 | -5.588 | 0 %100 |
| 80 | M90 | Z | -3.226 | -3.226 | 0 %100 |
| 81 | M92A | X | 0 | 0 | 0 %100 |
| 82 | M92A | Z | 0 | 0 | 0 %100 |
| 83 | M93 | X | -5.305 | -5.305 | 0 %100 |
| 84 | M93 | Z | -3.063 | -3.063 | 0 %100 |
| 85 | M95 | X | -5.588 | -5.588 | 0 %100 |
| 86 | M95 | Z | -3.226 | -3.226 | 0 %100 |
| 87 | M84B | X | -2.062 | -2.062 | 0 %100 |
| 88 | M84B | Z | -1.19 | -1.19 | 0 %100 |
| 89 | M89A | X | -2.062 | -2.062 | 0 %100 |
| 90 | M89A | Z | -1.19 | -1.19 | 0 %100 |
| 91 | M94A | X | -8.247 | -8.247 | 0 %100 |
| 92 | M94A | Z | -4.761 | -4.761 | 0 %100 |
| 93 | MP3C | X | -8.247 | -8.247 | 0 %100 |
| 94 | MP3C | Z | -4.761 | -4.761 | 0 %100 |
| 95 | MP4C | X | -8.247 | -8.247 | 0 %100 |
| 96 | MP4C | Z | -4.761 | -4.761 | 0 %100 |
| 97 | MP2C | X | -8.247 | -8.247 | 0 %100 |
| 98 | MP2C | Z | -4.761 | -4.761 | 0 %100 |
| 99 | MP1C | X | -8.247 | -8.247 | 0 %100 |
| 100 | MP1C | Z | -4.761 | -4.761 | 0 %100 |
| 101 | MP3B | X | -8.247 | -8.247 | 0 %100 |
| 102 | MP3B | Z | -4.761 | -4.761 | 0 %100 |
| 103 | MP4B | X | -8.247 | -8.247 | 0 %100 |
| 104 | MP4B | Z | -4.761 | -4.761 | 0 %100 |
| 105 | MP2B | X | -8.247 | -8.247 | 0 %100 |
| 106 | MP2B | Z | -4.761 | -4.761 | 0 %100 |
| 107 | MP1B | X | -8.247 | -8.247 | 0 %100 |
| 108 | MP1B | Z | -4.761 | -4.761 | 0 %100 |
| 109 | M109 | X | -2.378 | -2.378 | 0 %100 |
| 110 | M109 | Z | -1.373 | -1.373 | 0 %100 |
| 111 | M112 | X | -2.378 | -2.378 | 0 %100 |
| 112 | M112 | Z | -1.373 | -1.373 | 0 %100 |
| 113 | M115 | X | -9.513 | -9.513 | 0 %100 |
| 114 | M115 | Z | -5.492 | -5.492 | 0 %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 52 : Structure Wo (330 Deg))

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | -5.199 | -5.199 | 0 %100 |
| 2 | M1 | Z | -9.005 | -9.005 | 0 %100 |
| 3 | M4 | X | -1.948 | -1.948 | 0 %100 |
| 4 | M4 | Z | -3.374 | -3.374 | 0 %100 |
| 5 | M10 | X | -4.916 | -4.916 | 0 %100 |
| 6 | M10 | Z | -8.515 | -8.515 | 0 %100 |
| 7 | MP3A | X | -4.761 | -4.761 | 0 %100 |
| 8 | MP3A | Z | -8.247 | -8.247 | 0 %100 |
| 9 | MP4A | X | -4.761 | -4.761 | 0 %100 |
| 10 | MP4A | Z | -8.247 | -8.247 | 0 %100 |
| 11 | MP2A | X | -4.761 | -4.761 | 0 %100 |
| 12 | MP2A | Z | -8.247 | -8.247 | 0 %100 |
| 13 | MP1A | X | -4.761 | -4.761 | 0 %100 |
| 14 | MP1A | Z | -8.247 | -8.247 | 0 %100 |
| 15 | M43 | X | -4.916 | -4.916 | 0 %100 |
| 16 | M43 | Z | -8.515 | -8.515 | 0 %100 |
| 17 | M46 | X | -9.022 | -9.022 | 0 %100 |
| 18 | M46 | Z | -15.626 | -15.626 | 0 %100 |
| 19 | M51B | X | 0 | 0 | 0 %100 |
| 20 | M51B | Z | 0 | 0 | 0 %100 |
| 21 | M52B | X | -5.01 | -5.01 | 0 %100 |
| 22 | M52B | Z | -8.677 | -8.677 | 0 %100 |
| 23 | M76 | X | -3.007 | -3.007 | 0 %100 |
| 24 | M76 | Z | -5.209 | -5.209 | 0 %100 |
| 25 | M77 | X | 0 | 0 | 0 %100 |
| 26 | M77 | Z | 0 | 0 | 0 %100 |
| 27 | M80 | X | 0 | 0 | 0 %100 |
| 28 | M80 | Z | 0 | 0 | 0 %100 |
| 29 | M84 | X | -3.007 | -3.007 | 0 %100 |
| 30 | M84 | Z | -5.209 | -5.209 | 0 %100 |
| 31 | M85 | X | -9.189 | -9.189 | 0 %100 |
| 32 | M85 | Z | -15.915 | -15.915 | 0 %100 |
| 33 | M91 | X | -9.678 | -9.678 | 0 %100 |
| 34 | M91 | Z | -16.763 | -16.763 | 0 %100 |
| 35 | M34 | X | 0 | 0 | 0 %100 |
| 36 | M34 | Z | 0 | 0 | 0 %100 |
| 37 | M43A | X | -5.199 | -5.199 | 0 %100 |
| 38 | M43A | Z | -9.005 | -9.005 | 0 %100 |
| 39 | M52A | X | -7.791 | -7.791 | 0 %100 |
| 40 | M52A | Z | -13.495 | -13.495 | 0 %100 |
| 41 | M53 | X | 0 | 0 | 0 %100 |
| 42 | M53 | Z | 0 | 0 | 0 %100 |
| 43 | M54 | X | 0 | 0 | 0 %100 |
| 44 | M54 | Z | 0 | 0 | 0 %100 |
| 45 | M55 | X | 0 | 0 | 0 %100 |
| 46 | M55 | Z | 0 | 0 | 0 %100 |
| 47 | M58A | X | -5.01 | -5.01 | 0 %100 |
| 48 | M58A | Z | -8.677 | -8.677 | 0 %100 |
| 49 | M59A | X | -5.01 | -5.01 | 0 %100 |
| 50 | M59A | Z | -8.677 | -8.677 | 0 %100 |
| 51 | M63 | X | -12.029 | -12.029 | 0 %100 |
| 52 | M63 | Z | -20.835 | -20.835 | 0 %100 |
| 53 | M64 | X | -9.189 | -9.189 | 0 %100 |
| 54 | M64 | Z | -15.915 | -15.915 | 0 %100 |
| 55 | M66 | X | -9.678 | -9.678 | 0 %100 |
| 56 | M66 | Z | -16.763 | -16.763 | 0 %100 |
| 57 | M68 | X | -12.029 | -12.029 | 0 %100 |

Member Distributed Loads (BLC 52 : Structure Wo (330 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | -20.835 | -20.835 | 0 %100 |
| 59 | M69 | X | -9.189 | -9.189 | 0 %100 |
| 60 | M69 | Z | -15.915 | -15.915 | 0 %100 |
| 61 | M71 | X | -9.678 | -9.678 | 0 %100 |
| 62 | M71 | Z | -16.763 | -16.763 | 0 %100 |
| 63 | M76A | X | -1.948 | -1.948 | 0 %100 |
| 64 | M76A | Z | -3.374 | -3.374 | 0 %100 |
| 65 | M77A | X | -4.916 | -4.916 | 0 %100 |
| 66 | M77A | Z | -8.515 | -8.515 | 0 %100 |
| 67 | M78 | X | -4.916 | -4.916 | 0 %100 |
| 68 | M78 | Z | -8.515 | -8.515 | 0 %100 |
| 69 | M79A | X | -9.022 | -9.022 | 0 %100 |
| 70 | M79A | Z | -15.626 | -15.626 | 0 %100 |
| 71 | M82 | X | -5.01 | -5.01 | 0 %100 |
| 72 | M82 | Z | -8.677 | -8.677 | 0 %100 |
| 73 | M83A | X | 0 | 0 | 0 %100 |
| 74 | M83A | Z | 0 | 0 | 0 %100 |
| 75 | M87 | X | -3.007 | -3.007 | 0 %100 |
| 76 | M87 | Z | -5.209 | -5.209 | 0 %100 |
| 77 | M88A | X | -9.189 | -9.189 | 0 %100 |
| 78 | M88A | Z | -15.915 | -15.915 | 0 %100 |
| 79 | M90 | X | -9.678 | -9.678 | 0 %100 |
| 80 | M90 | Z | -16.763 | -16.763 | 0 %100 |
| 81 | M92A | X | -3.007 | -3.007 | 0 %100 |
| 82 | M92A | Z | -5.209 | -5.209 | 0 %100 |
| 83 | M93 | X | 0 | 0 | 0 %100 |
| 84 | M93 | Z | 0 | 0 | 0 %100 |
| 85 | M95 | X | 0 | 0 | 0 %100 |
| 86 | M95 | Z | 0 | 0 | 0 %100 |
| 87 | M84B | X | -3.571 | -3.571 | 0 %100 |
| 88 | M84B | Z | -6.185 | -6.185 | 0 %100 |
| 89 | M89A | X | 0 | 0 | 0 %100 |
| 90 | M89A | Z | 0 | 0 | 0 %100 |
| 91 | M94A | X | -3.571 | -3.571 | 0 %100 |
| 92 | M94A | Z | -6.185 | -6.185 | 0 %100 |
| 93 | MP3C | X | -4.761 | -4.761 | 0 %100 |
| 94 | MP3C | Z | -8.247 | -8.247 | 0 %100 |
| 95 | MP4C | X | -4.761 | -4.761 | 0 %100 |
| 96 | MP4C | Z | -8.247 | -8.247 | 0 %100 |
| 97 | MP2C | X | -4.761 | -4.761 | 0 %100 |
| 98 | MP2C | Z | -8.247 | -8.247 | 0 %100 |
| 99 | MP1C | X | -4.761 | -4.761 | 0 %100 |
| 100 | MP1C | Z | -8.247 | -8.247 | 0 %100 |
| 101 | MP3B | X | -4.761 | -4.761 | 0 %100 |
| 102 | MP3B | Z | -8.247 | -8.247 | 0 %100 |
| 103 | MP4B | X | -4.761 | -4.761 | 0 %100 |
| 104 | MP4B | Z | -8.247 | -8.247 | 0 %100 |
| 105 | MP2B | X | -4.761 | -4.761 | 0 %100 |
| 106 | MP2B | Z | -8.247 | -8.247 | 0 %100 |
| 107 | MP1B | X | -4.761 | -4.761 | 0 %100 |
| 108 | MP1B | Z | -8.247 | -8.247 | 0 %100 |
| 109 | M109 | X | -4.119 | -4.119 | 0 %100 |
| 110 | M109 | Z | -7.135 | -7.135 | 0 %100 |
| 111 | M112 | X | 0 | 0 | 0 %100 |
| 112 | M112 | Z | 0 | 0 | 0 %100 |
| 113 | M115 | X | -4.119 | -4.119 | 0 %100 |
| 114 | M115 | Z | -7.135 | -7.135 | 0 %100 |

Member Distributed Loads (BLC 53 : Structure Wi (0 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 1 | M1 | X | 0 | 0 | 0 | %100 |
| 2 | M1 | Z | -4.263 | -4.263 | 0 | %100 |
| 3 | M4 | X | 0 | 0 | 0 | %100 |
| 4 | M4 | Z | 0 | 0 | 0 | %100 |
| 5 | M10 | X | 0 | 0 | 0 | %100 |
| 6 | M10 | Z | -3.693 | -3.693 | 0 | %100 |
| 7 | MP3A | X | 0 | 0 | 0 | %100 |
| 8 | MP3A | Z | -3.439 | -3.439 | 0 | %100 |
| 9 | MP4A | X | 0 | 0 | 0 | %100 |
| 10 | MP4A | Z | -3.439 | -3.439 | 0 | %100 |
| 11 | MP2A | X | 0 | 0 | 0 | %100 |
| 12 | MP2A | Z | -3.439 | -3.439 | 0 | %100 |
| 13 | MP1A | X | 0 | 0 | 0 | %100 |
| 14 | MP1A | Z | -3.439 | -3.439 | 0 | %100 |
| 15 | M43 | X | 0 | 0 | 0 | %100 |
| 16 | M43 | Z | -3.693 | -3.693 | 0 | %100 |
| 17 | M46 | X | 0 | 0 | 0 | %100 |
| 18 | M46 | Z | -5.474 | -5.474 | 0 | %100 |
| 19 | M51B | X | 0 | 0 | 0 | %100 |
| 20 | M51B | Z | -1.007 | -1.007 | 0 | %100 |
| 21 | M52B | X | 0 | 0 | 0 | %100 |
| 22 | M52B | Z | -1.007 | -1.007 | 0 | %100 |
| 23 | M76 | X | 0 | 0 | 0 | %100 |
| 24 | M76 | Z | 0 | 0 | 0 | %100 |
| 25 | M77 | X | 0 | 0 | 0 | %100 |
| 26 | M77 | Z | -1.367 | -1.367 | 0 | %100 |
| 27 | M80 | X | 0 | 0 | 0 | %100 |
| 28 | M80 | Z | -1.426 | -1.426 | 0 | %100 |
| 29 | M84 | X | 0 | 0 | 0 | %100 |
| 30 | M84 | Z | 0 | 0 | 0 | %100 |
| 31 | M85 | X | 0 | 0 | 0 | %100 |
| 32 | M85 | Z | -1.367 | -1.367 | 0 | %100 |
| 33 | M91 | X | 0 | 0 | 0 | %100 |
| 34 | M91 | Z | -1.426 | -1.426 | 0 | %100 |
| 35 | M34 | X | 0 | 0 | 0 | %100 |
| 36 | M34 | Z | -1.066 | -1.066 | 0 | %100 |
| 37 | M43A | X | 0 | 0 | 0 | %100 |
| 38 | M43A | Z | -1.066 | -1.066 | 0 | %100 |
| 39 | M52A | X | 0 | 0 | 0 | %100 |
| 40 | M52A | Z | -3.409 | -3.409 | 0 | %100 |
| 41 | M53 | X | 0 | 0 | 0 | %100 |
| 42 | M53 | Z | -.923 | -.923 | 0 | %100 |
| 43 | M54 | X | 0 | 0 | 0 | %100 |
| 44 | M54 | Z | -.923 | -.923 | 0 | %100 |
| 45 | M55 | X | 0 | 0 | 0 | %100 |
| 46 | M55 | Z | -1.369 | -1.369 | 0 | %100 |
| 47 | M58A | X | 0 | 0 | 0 | %100 |
| 48 | M58A | Z | -1.007 | -1.007 | 0 | %100 |
| 49 | M59A | X | 0 | 0 | 0 | %100 |
| 50 | M59A | Z | -4.03 | -4.03 | 0 | %100 |
| 51 | M63 | X | 0 | 0 | 0 | %100 |
| 52 | M63 | Z | -4.039 | -4.039 | 0 | %100 |
| 53 | M64 | X | 0 | 0 | 0 | %100 |
| 54 | M64 | Z | -1.367 | -1.367 | 0 | %100 |
| 55 | M66 | X | 0 | 0 | 0 | %100 |
| 56 | M66 | Z | -1.426 | -1.426 | 0 | %100 |
| 57 | M68 | X | 0 | 0 | 0 | %100 |

Member Distributed Loads (BLC 53 : Structure Wi (0 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | -4.039 | -4.039 | 0 %100 |
| 59 | M69 | X | 0 | 0 | 0 %100 |
| 60 | M69 | Z | -5.467 | -5.467 | 0 %100 |
| 61 | M71 | X | 0 | 0 | 0 %100 |
| 62 | M71 | Z | -5.705 | -5.705 | 0 %100 |
| 63 | M76A | X | 0 | 0 | 0 %100 |
| 64 | M76A | Z | -3.409 | -3.409 | 0 %100 |
| 65 | M77A | X | 0 | 0 | 0 %100 |
| 66 | M77A | Z | -.923 | -.923 | 0 %100 |
| 67 | M78 | X | 0 | 0 | 0 %100 |
| 68 | M78 | Z | -.923 | -.923 | 0 %100 |
| 69 | M79A | X | 0 | 0 | 0 %100 |
| 70 | M79A | Z | -1.369 | -1.369 | 0 %100 |
| 71 | M82 | X | 0 | 0 | 0 %100 |
| 72 | M82 | Z | -4.03 | -4.03 | 0 %100 |
| 73 | M83A | X | 0 | 0 | 0 %100 |
| 74 | M83A | Z | -1.007 | -1.007 | 0 %100 |
| 75 | M87 | X | 0 | 0 | 0 %100 |
| 76 | M87 | Z | -4.039 | -4.039 | 0 %100 |
| 77 | M88A | X | 0 | 0 | 0 %100 |
| 78 | M88A | Z | -5.467 | -5.467 | 0 %100 |
| 79 | M90 | X | 0 | 0 | 0 %100 |
| 80 | M90 | Z | -5.705 | -5.705 | 0 %100 |
| 81 | M92A | X | 0 | 0 | 0 %100 |
| 82 | M92A | Z | -4.039 | -4.039 | 0 %100 |
| 83 | M93 | X | 0 | 0 | 0 %100 |
| 84 | M93 | Z | -1.367 | -1.367 | 0 %100 |
| 85 | M95 | X | 0 | 0 | 0 %100 |
| 86 | M95 | Z | -1.426 | -1.426 | 0 %100 |
| 87 | M84B | X | 0 | 0 | 0 %100 |
| 88 | M84B | Z | -3.439 | -3.439 | 0 %100 |
| 89 | M89A | X | 0 | 0 | 0 %100 |
| 90 | M89A | Z | -.86 | -.86 | 0 %100 |
| 91 | M94A | X | 0 | 0 | 0 %100 |
| 92 | M94A | Z | -.86 | -.86 | 0 %100 |
| 93 | MP3C | X | 0 | 0 | 0 %100 |
| 94 | MP3C | Z | -3.439 | -3.439 | 0 %100 |
| 95 | MP4C | X | 0 | 0 | 0 %100 |
| 96 | MP4C | Z | -3.439 | -3.439 | 0 %100 |
| 97 | MP2C | X | 0 | 0 | 0 %100 |
| 98 | MP2C | Z | -3.439 | -3.439 | 0 %100 |
| 99 | MP1C | X | 0 | 0 | 0 %100 |
| 100 | MP1C | Z | -3.439 | -3.439 | 0 %100 |
| 101 | MP3B | X | 0 | 0 | 0 %100 |
| 102 | MP3B | Z | -3.439 | -3.439 | 0 %100 |
| 103 | MP4B | X | 0 | 0 | 0 %100 |
| 104 | MP4B | Z | -3.439 | -3.439 | 0 %100 |
| 105 | MP2B | X | 0 | 0 | 0 %100 |
| 106 | MP2B | Z | -3.439 | -3.439 | 0 %100 |
| 107 | MP1B | X | 0 | 0 | 0 %100 |
| 108 | MP1B | Z | -3.439 | -3.439 | 0 %100 |
| 109 | M109 | X | 0 | 0 | 0 %100 |
| 110 | M109 | Z | -3.091 | -3.091 | 0 %100 |
| 111 | M112 | X | 0 | 0 | 0 %100 |
| 112 | M112 | Z | -.773 | -.773 | 0 %100 |
| 113 | M115 | X | 0 | 0 | 0 %100 |
| 114 | M115 | Z | -.773 | -.773 | 0 %100 |

Member Distributed Loads (BLC 54 : Structure Wi (30 Deg))

| Member Label | Direction | Start Magnitude[lb/ft,F,ksf] | End Magnitude[lb/ft,F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | 1.598 | 1.598 | 0 %100 |
| 2 | M1 | Z | -2.769 | -2.769 | 0 %100 |
| 3 | M4 | X | .568 | .568 | 0 %100 |
| 4 | M4 | Z | -.984 | -.984 | 0 %100 |
| 5 | M10 | X | 1.385 | 1.385 | 0 %100 |
| 6 | M10 | Z | -2.399 | -2.399 | 0 %100 |
| 7 | MP3A | X | 1.719 | 1.719 | 0 %100 |
| 8 | MP3A | Z | -2.978 | -2.978 | 0 %100 |
| 9 | MP4A | X | 1.719 | 1.719 | 0 %100 |
| 10 | MP4A | Z | -2.978 | -2.978 | 0 %100 |
| 11 | MP2A | X | 1.719 | 1.719 | 0 %100 |
| 12 | MP2A | Z | -2.978 | -2.978 | 0 %100 |
| 13 | MP1A | X | 1.719 | 1.719 | 0 %100 |
| 14 | MP1A | Z | -2.978 | -2.978 | 0 %100 |
| 15 | M43 | X | 1.385 | 1.385 | 0 %100 |
| 16 | M43 | Z | -2.399 | -2.399 | 0 %100 |
| 17 | M46 | X | 2.053 | 2.053 | 0 %100 |
| 18 | M46 | Z | -3.556 | -3.556 | 0 %100 |
| 19 | M51B | X | 1.511 | 1.511 | 0 %100 |
| 20 | M51B | Z | -2.617 | -2.617 | 0 %100 |
| 21 | M52B | X | 0 | 0 | 0 %100 |
| 22 | M52B | Z | 0 | 0 | 0 %100 |
| 23 | M76 | X | .673 | .673 | 0 %100 |
| 24 | M76 | Z | -1.166 | -1.166 | 0 %100 |
| 25 | M77 | X | 2.05 | 2.05 | 0 %100 |
| 26 | M77 | Z | -3.551 | -3.551 | 0 %100 |
| 27 | M80 | X | 2.139 | 2.139 | 0 %100 |
| 28 | M80 | Z | -3.705 | -3.705 | 0 %100 |
| 29 | M84 | X | .673 | .673 | 0 %100 |
| 30 | M84 | Z | -1.166 | -1.166 | 0 %100 |
| 31 | M85 | X | 0 | 0 | 0 %100 |
| 32 | M85 | Z | 0 | 0 | 0 %100 |
| 33 | M91 | X | 0 | 0 | 0 %100 |
| 34 | M91 | Z | 0 | 0 | 0 %100 |
| 35 | M34 | X | 1.598 | 1.598 | 0 %100 |
| 36 | M34 | Z | -2.769 | -2.769 | 0 %100 |
| 37 | M43A | X | 0 | 0 | 0 %100 |
| 38 | M43A | Z | 0 | 0 | 0 %100 |
| 39 | M52A | X | .568 | .568 | 0 %100 |
| 40 | M52A | Z | -.984 | -.984 | 0 %100 |
| 41 | M53 | X | 1.385 | 1.385 | 0 %100 |
| 42 | M53 | Z | -2.399 | -2.399 | 0 %100 |
| 43 | M54 | X | 1.385 | 1.385 | 0 %100 |
| 44 | M54 | Z | -2.399 | -2.399 | 0 %100 |
| 45 | M55 | X | 2.053 | 2.053 | 0 %100 |
| 46 | M55 | Z | -3.556 | -3.556 | 0 %100 |
| 47 | M58A | X | 0 | 0 | 0 %100 |
| 48 | M58A | Z | 0 | 0 | 0 %100 |
| 49 | M59A | X | 1.511 | 1.511 | 0 %100 |
| 50 | M59A | Z | -2.617 | -2.617 | 0 %100 |
| 51 | M63 | X | .673 | .673 | 0 %100 |
| 52 | M63 | Z | -1.166 | -1.166 | 0 %100 |
| 53 | M64 | X | 0 | 0 | 0 %100 |
| 54 | M64 | Z | 0 | 0 | 0 %100 |
| 55 | M66 | X | 0 | 0 | 0 %100 |
| 56 | M66 | Z | 0 | 0 | 0 %100 |
| 57 | M68 | X | .673 | .673 | 0 %100 |

Member Distributed Loads (BLC 54 : Structure Wi (30 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 58 | M68 | Z | -1.166 | -1.166 | 0 %100 |
| 59 | M69 | X | 2.05 | 2.05 | 0 %100 |
| 60 | M69 | Z | -3.551 | -3.551 | 0 %100 |
| 61 | M71 | X | 2.139 | 2.139 | 0 %100 |
| 62 | M71 | Z | -3.705 | -3.705 | 0 %100 |
| 63 | M76A | X | 2.273 | 2.273 | 0 %100 |
| 64 | M76A | Z | -3.937 | -3.937 | 0 %100 |
| 65 | M77A | X | 0 | 0 | 0 %100 |
| 66 | M77A | Z | 0 | 0 | 0 %100 |
| 67 | M78 | X | 0 | 0 | 0 %100 |
| 68 | M78 | Z | 0 | 0 | 0 %100 |
| 69 | M79A | X | 0 | 0 | 0 %100 |
| 70 | M79A | Z | 0 | 0 | 0 %100 |
| 71 | M82 | X | 1.511 | 1.511 | 0 %100 |
| 72 | M82 | Z | -2.617 | -2.617 | 0 %100 |
| 73 | M83A | X | 1.511 | 1.511 | 0 %100 |
| 74 | M83A | Z | -2.617 | -2.617 | 0 %100 |
| 75 | M87 | X | 2.693 | 2.693 | 0 %100 |
| 76 | M87 | Z | -4.664 | -4.664 | 0 %100 |
| 77 | M88A | X | 2.05 | 2.05 | 0 %100 |
| 78 | M88A | Z | -3.551 | -3.551 | 0 %100 |
| 79 | M90 | X | 2.139 | 2.139 | 0 %100 |
| 80 | M90 | Z | -3.705 | -3.705 | 0 %100 |
| 81 | M92A | X | 2.693 | 2.693 | 0 %100 |
| 82 | M92A | Z | -4.664 | -4.664 | 0 %100 |
| 83 | M93 | X | 2.05 | 2.05 | 0 %100 |
| 84 | M93 | Z | -3.551 | -3.551 | 0 %100 |
| 85 | M95 | X | 2.139 | 2.139 | 0 %100 |
| 86 | M95 | Z | -3.705 | -3.705 | 0 %100 |
| 87 | M84B | X | 1.29 | 1.29 | 0 %100 |
| 88 | M84B | Z | -2.234 | -2.234 | 0 %100 |
| 89 | M89A | X | 1.29 | 1.29 | 0 %100 |
| 90 | M89A | Z | -2.234 | -2.234 | 0 %100 |
| 91 | M94A | X | 0 | 0 | 0 %100 |
| 92 | M94A | Z | 0 | 0 | 0 %100 |
| 93 | MP3C | X | 1.719 | 1.719 | 0 %100 |
| 94 | MP3C | Z | -2.978 | -2.978 | 0 %100 |
| 95 | MP4C | X | 1.719 | 1.719 | 0 %100 |
| 96 | MP4C | Z | -2.978 | -2.978 | 0 %100 |
| 97 | MP2C | X | 1.719 | 1.719 | 0 %100 |
| 98 | MP2C | Z | -2.978 | -2.978 | 0 %100 |
| 99 | MP1C | X | 1.719 | 1.719 | 0 %100 |
| 100 | MP1C | Z | -2.978 | -2.978 | 0 %100 |
| 101 | MP3B | X | 1.719 | 1.719 | 0 %100 |
| 102 | MP3B | Z | -2.978 | -2.978 | 0 %100 |
| 103 | MP4B | X | 1.719 | 1.719 | 0 %100 |
| 104 | MP4B | Z | -2.978 | -2.978 | 0 %100 |
| 105 | MP2B | X | 1.719 | 1.719 | 0 %100 |
| 106 | MP2B | Z | -2.978 | -2.978 | 0 %100 |
| 107 | MP1B | X | 1.719 | 1.719 | 0 %100 |
| 108 | MP1B | Z | -2.978 | -2.978 | 0 %100 |
| 109 | M109 | X | 1.159 | 1.159 | 0 %100 |
| 110 | M109 | Z | -2.008 | -2.008 | 0 %100 |
| 111 | M112 | X | 1.159 | 1.159 | 0 %100 |
| 112 | M112 | Z | -2.008 | -2.008 | 0 %100 |
| 113 | M115 | X | 0 | 0 | 0 %100 |
| 114 | M115 | Z | 0 | 0 | 0 %100 |

Member Distributed Loads (BLC 55 : Structure Wi (60 Deg))

| Member Label | Direction | Start Magnitude[lb/ft,F,ksf] | End Magnitude[lb/ft,F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | .923 | .923 | 0 %100 |
| 2 | M1 | Z | -.533 | -.533 | 0 %100 |
| 3 | M4 | X | 2.952 | 2.952 | 0 %100 |
| 4 | M4 | Z | -1.705 | -1.705 | 0 %100 |
| 5 | M10 | X | .8 | .8 | 0 %100 |
| 6 | M10 | Z | -.462 | -.462 | 0 %100 |
| 7 | MP3A | X | 2.978 | 2.978 | 0 %100 |
| 8 | MP3A | Z | -1.719 | -1.719 | 0 %100 |
| 9 | MP4A | X | 2.978 | 2.978 | 0 %100 |
| 10 | MP4A | Z | -1.719 | -1.719 | 0 %100 |
| 11 | MP2A | X | 2.978 | 2.978 | 0 %100 |
| 12 | MP2A | Z | -1.719 | -1.719 | 0 %100 |
| 13 | MP1A | X | 2.978 | 2.978 | 0 %100 |
| 14 | MP1A | Z | -1.719 | -1.719 | 0 %100 |
| 15 | M43 | X | .8 | .8 | 0 %100 |
| 16 | M43 | Z | -.462 | -.462 | 0 %100 |
| 17 | M46 | X | 1.185 | 1.185 | 0 %100 |
| 18 | M46 | Z | -.684 | -.684 | 0 %100 |
| 19 | M51B | X | 3.49 | 3.49 | 0 %100 |
| 20 | M51B | Z | -2.015 | -2.015 | 0 %100 |
| 21 | M52B | X | .872 | .872 | 0 %100 |
| 22 | M52B | Z | -.504 | -.504 | 0 %100 |
| 23 | M76 | X | 3.498 | 3.498 | 0 %100 |
| 24 | M76 | Z | -2.019 | -2.019 | 0 %100 |
| 25 | M77 | X | 4.734 | 4.734 | 0 %100 |
| 26 | M77 | Z | -2.733 | -2.733 | 0 %100 |
| 27 | M80 | X | 4.941 | 4.941 | 0 %100 |
| 28 | M80 | Z | -2.852 | -2.852 | 0 %100 |
| 29 | M84 | X | 3.498 | 3.498 | 0 %100 |
| 30 | M84 | Z | -2.019 | -2.019 | 0 %100 |
| 31 | M85 | X | 1.184 | 1.184 | 0 %100 |
| 32 | M85 | Z | -.683 | -.683 | 0 %100 |
| 33 | M91 | X | 1.235 | 1.235 | 0 %100 |
| 34 | M91 | Z | -.713 | -.713 | 0 %100 |
| 35 | M34 | X | 3.692 | 3.692 | 0 %100 |
| 36 | M34 | Z | -2.131 | -2.131 | 0 %100 |
| 37 | M43A | X | .923 | .923 | 0 %100 |
| 38 | M43A | Z | -.533 | -.533 | 0 %100 |
| 39 | M52A | X | 0 | 0 | 0 %100 |
| 40 | M52A | Z | 0 | 0 | 0 %100 |
| 41 | M53 | X | 3.199 | 3.199 | 0 %100 |
| 42 | M53 | Z | -1.847 | -1.847 | 0 %100 |
| 43 | M54 | X | 3.199 | 3.199 | 0 %100 |
| 44 | M54 | Z | -1.847 | -1.847 | 0 %100 |
| 45 | M55 | X | 4.741 | 4.741 | 0 %100 |
| 46 | M55 | Z | -2.737 | -2.737 | 0 %100 |
| 47 | M58A | X | .872 | .872 | 0 %100 |
| 48 | M58A | Z | -.504 | -.504 | 0 %100 |
| 49 | M59A | X | .872 | .872 | 0 %100 |
| 50 | M59A | Z | -.504 | -.504 | 0 %100 |
| 51 | M63 | X | 0 | 0 | 0 %100 |
| 52 | M63 | Z | 0 | 0 | 0 %100 |
| 53 | M64 | X | 1.184 | 1.184 | 0 %100 |
| 54 | M64 | Z | -.683 | -.683 | 0 %100 |
| 55 | M66 | X | 1.235 | 1.235 | 0 %100 |
| 56 | M66 | Z | -.713 | -.713 | 0 %100 |
| 57 | M68 | X | 0 | 0 | 0 %100 |

Member Distributed Loads (BLC 55 : Structure Wi (60 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft.%] | End Location[ft.%] | |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|------|
| 58 | M68 | Z | 0 | 0 | %100 | |
| 59 | M69 | X | 1.184 | 1.184 | 0 | %100 |
| 60 | M69 | Z | -.683 | -.683 | 0 | %100 |
| 61 | M71 | X | 1.235 | 1.235 | 0 | %100 |
| 62 | M71 | Z | -.713 | -.713 | 0 | %100 |
| 63 | M76A | X | 2.952 | 2.952 | 0 | %100 |
| 64 | M76A | Z | -1.705 | -1.705 | 0 | %100 |
| 65 | M77A | X | .8 | .8 | 0 | %100 |
| 66 | M77A | Z | -.462 | -.462 | 0 | %100 |
| 67 | M78 | X | .8 | .8 | 0 | %100 |
| 68 | M78 | Z | -.462 | -.462 | 0 | %100 |
| 69 | M79A | X | 1.185 | 1.185 | 0 | %100 |
| 70 | M79A | Z | -.684 | -.684 | 0 | %100 |
| 71 | M82 | X | .872 | .872 | 0 | %100 |
| 72 | M82 | Z | -.504 | -.504 | 0 | %100 |
| 73 | M83A | X | 3.49 | 3.49 | 0 | %100 |
| 74 | M83A | Z | -2.015 | -2.015 | 0 | %100 |
| 75 | M87 | X | 3.498 | 3.498 | 0 | %100 |
| 76 | M87 | Z | -2.019 | -2.019 | 0 | %100 |
| 77 | M88A | X | 1.184 | 1.184 | 0 | %100 |
| 78 | M88A | Z | -.683 | -.683 | 0 | %100 |
| 79 | M90 | X | 1.235 | 1.235 | 0 | %100 |
| 80 | M90 | Z | -.713 | -.713 | 0 | %100 |
| 81 | M92A | X | 3.498 | 3.498 | 0 | %100 |
| 82 | M92A | Z | -2.019 | -2.019 | 0 | %100 |
| 83 | M93 | X | 4.734 | 4.734 | 0 | %100 |
| 84 | M93 | Z | -2.733 | -2.733 | 0 | %100 |
| 85 | M95 | X | 4.941 | 4.941 | 0 | %100 |
| 86 | M95 | Z | -2.852 | -2.852 | 0 | %100 |
| 87 | M84B | X | .745 | .745 | 0 | %100 |
| 88 | M84B | Z | -.43 | -.43 | 0 | %100 |
| 89 | M89A | X | 2.978 | 2.978 | 0 | %100 |
| 90 | M89A | Z | -1.719 | -1.719 | 0 | %100 |
| 91 | M94A | X | .745 | .745 | 0 | %100 |
| 92 | M94A | Z | -.43 | -.43 | 0 | %100 |
| 93 | MP3C | X | 2.978 | 2.978 | 0 | %100 |
| 94 | MP3C | Z | -1.719 | -1.719 | 0 | %100 |
| 95 | MP4C | X | 2.978 | 2.978 | 0 | %100 |
| 96 | MP4C | Z | -1.719 | -1.719 | 0 | %100 |
| 97 | MP2C | X | 2.978 | 2.978 | 0 | %100 |
| 98 | MP2C | Z | -1.719 | -1.719 | 0 | %100 |
| 99 | MP1C | X | 2.978 | 2.978 | 0 | %100 |
| 100 | MP1C | Z | -1.719 | -1.719 | 0 | %100 |
| 101 | MP3B | X | 2.978 | 2.978 | 0 | %100 |
| 102 | MP3B | Z | -1.719 | -1.719 | 0 | %100 |
| 103 | MP4B | X | 2.978 | 2.978 | 0 | %100 |
| 104 | MP4B | Z | -1.719 | -1.719 | 0 | %100 |
| 105 | MP2B | X | 2.978 | 2.978 | 0 | %100 |
| 106 | MP2B | Z | -1.719 | -1.719 | 0 | %100 |
| 107 | MP1B | X | 2.978 | 2.978 | 0 | %100 |
| 108 | MP1B | Z | -1.719 | -1.719 | 0 | %100 |
| 109 | M109 | X | .669 | .669 | 0 | %100 |
| 110 | M109 | Z | -.386 | -.386 | 0 | %100 |
| 111 | M112 | X | 2.677 | 2.677 | 0 | %100 |
| 112 | M112 | Z | -1.546 | -1.546 | 0 | %100 |
| 113 | M115 | X | .669 | .669 | 0 | %100 |
| 114 | M115 | Z | -.386 | -.386 | 0 | %100 |

Member Distributed Loads (BLC 56 : Structure Wi (90 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 1 | M1 | X | 0 | 0 | 0 | %100 |
| 2 | M1 | Z | 0 | 0 | 0 | %100 |
| 3 | M4 | X | 4.546 | 4.546 | 0 | %100 |
| 4 | M4 | Z | 0 | 0 | 0 | %100 |
| 5 | M10 | X | 0 | 0 | 0 | %100 |
| 6 | M10 | Z | 0 | 0 | 0 | %100 |
| 7 | MP3A | X | 3.439 | 3.439 | 0 | %100 |
| 8 | MP3A | Z | 0 | 0 | 0 | %100 |
| 9 | MP4A | X | 3.439 | 3.439 | 0 | %100 |
| 10 | MP4A | Z | 0 | 0 | 0 | %100 |
| 11 | MP2A | X | 3.439 | 3.439 | 0 | %100 |
| 12 | MP2A | Z | 0 | 0 | 0 | %100 |
| 13 | MP1A | X | 3.439 | 3.439 | 0 | %100 |
| 14 | MP1A | Z | 0 | 0 | 0 | %100 |
| 15 | M43 | X | 0 | 0 | 0 | %100 |
| 16 | M43 | Z | 0 | 0 | 0 | %100 |
| 17 | M46 | X | 0 | 0 | 0 | %100 |
| 18 | M46 | Z | 0 | 0 | 0 | %100 |
| 19 | M51B | X | 3.022 | 3.022 | 0 | %100 |
| 20 | M51B | Z | 0 | 0 | 0 | %100 |
| 21 | M52B | X | 3.022 | 3.022 | 0 | %100 |
| 22 | M52B | Z | 0 | 0 | 0 | %100 |
| 23 | M76 | X | 5.385 | 5.385 | 0 | %100 |
| 24 | M76 | Z | 0 | 0 | 0 | %100 |
| 25 | M77 | X | 4.1 | 4.1 | 0 | %100 |
| 26 | M77 | Z | 0 | 0 | 0 | %100 |
| 27 | M80 | X | 4.279 | 4.279 | 0 | %100 |
| 28 | M80 | Z | 0 | 0 | 0 | %100 |
| 29 | M84 | X | 5.385 | 5.385 | 0 | %100 |
| 30 | M84 | Z | 0 | 0 | 0 | %100 |
| 31 | M85 | X | 4.1 | 4.1 | 0 | %100 |
| 32 | M85 | Z | 0 | 0 | 0 | %100 |
| 33 | M91 | X | 4.279 | 4.279 | 0 | %100 |
| 34 | M91 | Z | 0 | 0 | 0 | %100 |
| 35 | M34 | X | 3.197 | 3.197 | 0 | %100 |
| 36 | M34 | Z | 0 | 0 | 0 | %100 |
| 37 | M43A | X | 3.197 | 3.197 | 0 | %100 |
| 38 | M43A | Z | 0 | 0 | 0 | %100 |
| 39 | M52A | X | 1.136 | 1.136 | 0 | %100 |
| 40 | M52A | Z | 0 | 0 | 0 | %100 |
| 41 | M53 | X | 2.77 | 2.77 | 0 | %100 |
| 42 | M53 | Z | 0 | 0 | 0 | %100 |
| 43 | M54 | X | 2.77 | 2.77 | 0 | %100 |
| 44 | M54 | Z | 0 | 0 | 0 | %100 |
| 45 | M55 | X | 4.106 | 4.106 | 0 | %100 |
| 46 | M55 | Z | 0 | 0 | 0 | %100 |
| 47 | M58A | X | 3.022 | 3.022 | 0 | %100 |
| 48 | M58A | Z | 0 | 0 | 0 | %100 |
| 49 | M59A | X | 0 | 0 | 0 | %100 |
| 50 | M59A | Z | 0 | 0 | 0 | %100 |
| 51 | M63 | X | 1.346 | 1.346 | 0 | %100 |
| 52 | M63 | Z | 0 | 0 | 0 | %100 |
| 53 | M64 | X | 4.1 | 4.1 | 0 | %100 |
| 54 | M64 | Z | 0 | 0 | 0 | %100 |
| 55 | M66 | X | 4.279 | 4.279 | 0 | %100 |
| 56 | M66 | Z | 0 | 0 | 0 | %100 |
| 57 | M68 | X | 1.346 | 1.346 | 0 | %100 |

Member Distributed Loads (BLC 56 : Structure Wi (90 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | 0 | 0 | %100 |
| 59 | M69 | X | 0 | 0 | %100 |
| 60 | M69 | Z | 0 | 0 | %100 |
| 61 | M71 | X | 0 | 0 | %100 |
| 62 | M71 | Z | 0 | 0 | %100 |
| 63 | M76A | X | 1.136 | 1.136 | %100 |
| 64 | M76A | Z | 0 | 0 | %100 |
| 65 | M77A | X | 2.77 | 2.77 | %100 |
| 66 | M77A | Z | 0 | 0 | %100 |
| 67 | M78 | X | 2.77 | 2.77 | %100 |
| 68 | M78 | Z | 0 | 0 | %100 |
| 69 | M79A | X | 4.106 | 4.106 | %100 |
| 70 | M79A | Z | 0 | 0 | %100 |
| 71 | M82 | X | 0 | 0 | %100 |
| 72 | M82 | Z | 0 | 0 | %100 |
| 73 | M83A | X | 3.022 | 3.022 | %100 |
| 74 | M83A | Z | 0 | 0 | %100 |
| 75 | M87 | X | 1.346 | 1.346 | %100 |
| 76 | M87 | Z | 0 | 0 | %100 |
| 77 | M88A | X | 0 | 0 | %100 |
| 78 | M88A | Z | 0 | 0 | %100 |
| 79 | M90 | X | 0 | 0 | %100 |
| 80 | M90 | Z | 0 | 0 | %100 |
| 81 | M92A | X | 1.346 | 1.346 | %100 |
| 82 | M92A | Z | 0 | 0 | %100 |
| 83 | M93 | X | 4.1 | 4.1 | %100 |
| 84 | M93 | Z | 0 | 0 | %100 |
| 85 | M95 | X | 4.279 | 4.279 | %100 |
| 86 | M95 | Z | 0 | 0 | %100 |
| 87 | M84B | X | 0 | 0 | %100 |
| 88 | M84B | Z | 0 | 0 | %100 |
| 89 | M89A | X | 2.579 | 2.579 | %100 |
| 90 | M89A | Z | 0 | 0 | %100 |
| 91 | M94A | X | 2.579 | 2.579 | %100 |
| 92 | M94A | Z | 0 | 0 | %100 |
| 93 | MP3C | X | 3.439 | 3.439 | %100 |
| 94 | MP3C | Z | 0 | 0 | %100 |
| 95 | MP4C | X | 3.439 | 3.439 | %100 |
| 96 | MP4C | Z | 0 | 0 | %100 |
| 97 | MP2C | X | 3.439 | 3.439 | %100 |
| 98 | MP2C | Z | 0 | 0 | %100 |
| 99 | MP1C | X | 3.439 | 3.439 | %100 |
| 100 | MP1C | Z | 0 | 0 | %100 |
| 101 | MP3B | X | 3.439 | 3.439 | %100 |
| 102 | MP3B | Z | 0 | 0 | %100 |
| 103 | MP4B | X | 3.439 | 3.439 | %100 |
| 104 | MP4B | Z | 0 | 0 | %100 |
| 105 | MP2B | X | 3.439 | 3.439 | %100 |
| 106 | MP2B | Z | 0 | 0 | %100 |
| 107 | MP1B | X | 3.439 | 3.439 | %100 |
| 108 | MP1B | Z | 0 | 0 | %100 |
| 109 | M109 | X | 0 | 0 | %100 |
| 110 | M109 | Z | 0 | 0 | %100 |
| 111 | M112 | X | 2.319 | 2.319 | %100 |
| 112 | M112 | Z | 0 | 0 | %100 |
| 113 | M115 | X | 2.319 | 2.319 | %100 |
| 114 | M115 | Z | 0 | 0 | %100 |

Member Distributed Loads (BLC 57 : Structure Wi (120 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k. | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | .923 | .923 | 0 | %100 |
| 2 | M1 | Z | .533 | .533 | 0 | %100 |
| 3 | M4 | X | 2.952 | 2.952 | 0 | %100 |
| 4 | M4 | Z | 1.705 | 1.705 | 0 | %100 |
| 5 | M10 | X | .8 | .8 | 0 | %100 |
| 6 | M10 | Z | .462 | .462 | 0 | %100 |
| 7 | MP3A | X | 2.978 | 2.978 | 0 | %100 |
| 8 | MP3A | Z | 1.719 | 1.719 | 0 | %100 |
| 9 | MP4A | X | 2.978 | 2.978 | 0 | %100 |
| 10 | MP4A | Z | 1.719 | 1.719 | 0 | %100 |
| 11 | MP2A | X | 2.978 | 2.978 | 0 | %100 |
| 12 | MP2A | Z | 1.719 | 1.719 | 0 | %100 |
| 13 | MP1A | X | 2.978 | 2.978 | 0 | %100 |
| 14 | MP1A | Z | 1.719 | 1.719 | 0 | %100 |
| 15 | M43 | X | .8 | .8 | 0 | %100 |
| 16 | M43 | Z | .462 | .462 | 0 | %100 |
| 17 | M46 | X | 1.185 | 1.185 | 0 | %100 |
| 18 | M46 | Z | .684 | .684 | 0 | %100 |
| 19 | M51B | X | .872 | .872 | 0 | %100 |
| 20 | M51B | Z | .504 | .504 | 0 | %100 |
| 21 | M52B | X | 3.49 | 3.49 | 0 | %100 |
| 22 | M52B | Z | 2.015 | 2.015 | 0 | %100 |
| 23 | M76 | X | 3.498 | 3.498 | 0 | %100 |
| 24 | M76 | Z | 2.019 | 2.019 | 0 | %100 |
| 25 | M77 | X | 1.184 | 1.184 | 0 | %100 |
| 26 | M77 | Z | .683 | .683 | 0 | %100 |
| 27 | M80 | X | 1.235 | 1.235 | 0 | %100 |
| 28 | M80 | Z | .713 | .713 | 0 | %100 |
| 29 | M84 | X | 3.498 | 3.498 | 0 | %100 |
| 30 | M84 | Z | 2.019 | 2.019 | 0 | %100 |
| 31 | M85 | X | 4.734 | 4.734 | 0 | %100 |
| 32 | M85 | Z | 2.733 | 2.733 | 0 | %100 |
| 33 | M91 | X | 4.941 | 4.941 | 0 | %100 |
| 34 | M91 | Z | 2.852 | 2.852 | 0 | %100 |
| 35 | M34 | X | .923 | .923 | 0 | %100 |
| 36 | M34 | Z | .533 | .533 | 0 | %100 |
| 37 | M43A | X | 3.692 | 3.692 | 0 | %100 |
| 38 | M43A | Z | 2.131 | 2.131 | 0 | %100 |
| 39 | M52A | X | 2.952 | 2.952 | 0 | %100 |
| 40 | M52A | Z | 1.705 | 1.705 | 0 | %100 |
| 41 | M53 | X | .8 | .8 | 0 | %100 |
| 42 | M53 | Z | .462 | .462 | 0 | %100 |
| 43 | M54 | X | .8 | .8 | 0 | %100 |
| 44 | M54 | Z | .462 | .462 | 0 | %100 |
| 45 | M55 | X | 1.185 | 1.185 | 0 | %100 |
| 46 | M55 | Z | .684 | .684 | 0 | %100 |
| 47 | M58A | X | 3.49 | 3.49 | 0 | %100 |
| 48 | M58A | Z | 2.015 | 2.015 | 0 | %100 |
| 49 | M59A | X | .872 | .872 | 0 | %100 |
| 50 | M59A | Z | .504 | .504 | 0 | %100 |
| 51 | M63 | X | 3.498 | 3.498 | 0 | %100 |
| 52 | M63 | Z | 2.019 | 2.019 | 0 | %100 |
| 53 | M64 | X | 4.734 | 4.734 | 0 | %100 |
| 54 | M64 | Z | 2.733 | 2.733 | 0 | %100 |
| 55 | M66 | X | 4.941 | 4.941 | 0 | %100 |
| 56 | M66 | Z | 2.852 | 2.852 | 0 | %100 |
| 57 | M68 | X | 3.498 | 3.498 | 0 | %100 |

Member Distributed Loads (BLC 57 : Structure Wi (120 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | 2.019 | 2.019 | 0 %100 |
| 59 | M69 | X | 1.184 | 1.184 | 0 %100 |
| 60 | M69 | Z | .683 | .683 | 0 %100 |
| 61 | M71 | X | 1.235 | 1.235 | 0 %100 |
| 62 | M71 | Z | .713 | .713 | 0 %100 |
| 63 | M76A | X | 0 | 0 | 0 %100 |
| 64 | M76A | Z | 0 | 0 | 0 %100 |
| 65 | M77A | X | 3.199 | 3.199 | 0 %100 |
| 66 | M77A | Z | 1.847 | 1.847 | 0 %100 |
| 67 | M78 | X | 3.199 | 3.199 | 0 %100 |
| 68 | M78 | Z | 1.847 | 1.847 | 0 %100 |
| 69 | M79A | X | 4.741 | 4.741 | 0 %100 |
| 70 | M79A | Z | 2.737 | 2.737 | 0 %100 |
| 71 | M82 | X | .872 | .872 | 0 %100 |
| 72 | M82 | Z | .504 | .504 | 0 %100 |
| 73 | M83A | X | .872 | .872 | 0 %100 |
| 74 | M83A | Z | .504 | .504 | 0 %100 |
| 75 | M87 | X | 0 | 0 | 0 %100 |
| 76 | M87 | Z | 0 | 0 | 0 %100 |
| 77 | M88A | X | 1.184 | 1.184 | 0 %100 |
| 78 | M88A | Z | .683 | .683 | 0 %100 |
| 79 | M90 | X | 1.235 | 1.235 | 0 %100 |
| 80 | M90 | Z | .713 | .713 | 0 %100 |
| 81 | M92A | X | 0 | 0 | 0 %100 |
| 82 | M92A | Z | 0 | 0 | 0 %100 |
| 83 | M93 | X | 1.184 | 1.184 | 0 %100 |
| 84 | M93 | Z | .683 | .683 | 0 %100 |
| 85 | M95 | X | 1.235 | 1.235 | 0 %100 |
| 86 | M95 | Z | .713 | .713 | 0 %100 |
| 87 | M84B | X | .745 | .745 | 0 %100 |
| 88 | M84B | Z | .43 | .43 | 0 %100 |
| 89 | M89A | X | .745 | .745 | 0 %100 |
| 90 | M89A | Z | .43 | .43 | 0 %100 |
| 91 | M94A | X | 2.978 | 2.978 | 0 %100 |
| 92 | M94A | Z | 1.719 | 1.719 | 0 %100 |
| 93 | MP3C | X | 2.978 | 2.978 | 0 %100 |
| 94 | MP3C | Z | 1.719 | 1.719 | 0 %100 |
| 95 | MP4C | X | 2.978 | 2.978 | 0 %100 |
| 96 | MP4C | Z | 1.719 | 1.719 | 0 %100 |
| 97 | MP2C | X | 2.978 | 2.978 | 0 %100 |
| 98 | MP2C | Z | 1.719 | 1.719 | 0 %100 |
| 99 | MP1C | X | 2.978 | 2.978 | 0 %100 |
| 100 | MP1C | Z | 1.719 | 1.719 | 0 %100 |
| 101 | MP3B | X | 2.978 | 2.978 | 0 %100 |
| 102 | MP3B | Z | 1.719 | 1.719 | 0 %100 |
| 103 | MP4B | X | 2.978 | 2.978 | 0 %100 |
| 104 | MP4B | Z | 1.719 | 1.719 | 0 %100 |
| 105 | MP2B | X | 2.978 | 2.978 | 0 %100 |
| 106 | MP2B | Z | 1.719 | 1.719 | 0 %100 |
| 107 | MP1B | X | 2.978 | 2.978 | 0 %100 |
| 108 | MP1B | Z | 1.719 | 1.719 | 0 %100 |
| 109 | M109 | X | .669 | .669 | 0 %100 |
| 110 | M109 | Z | .386 | .386 | 0 %100 |
| 111 | M112 | X | .669 | .669 | 0 %100 |
| 112 | M112 | Z | .386 | .386 | 0 %100 |
| 113 | M115 | X | 2.677 | 2.677 | 0 %100 |
| 114 | M115 | Z | 1.546 | 1.546 | 0 %100 |

Member Distributed Loads (BLC 58 : Structure Wi (150 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 1 | M1 | X | 1.598 | 1.598 | 0 | %100 |
| 2 | M1 | Z | 2.769 | 2.769 | 0 | %100 |
| 3 | M4 | X | .568 | .568 | 0 | %100 |
| 4 | M4 | Z | .984 | .984 | 0 | %100 |
| 5 | M10 | X | 1.385 | 1.385 | 0 | %100 |
| 6 | M10 | Z | 2.399 | 2.399 | 0 | %100 |
| 7 | MP3A | X | 1.719 | 1.719 | 0 | %100 |
| 8 | MP3A | Z | 2.978 | 2.978 | 0 | %100 |
| 9 | MP4A | X | 1.719 | 1.719 | 0 | %100 |
| 10 | MP4A | Z | 2.978 | 2.978 | 0 | %100 |
| 11 | MP2A | X | 1.719 | 1.719 | 0 | %100 |
| 12 | MP2A | Z | 2.978 | 2.978 | 0 | %100 |
| 13 | MP1A | X | 1.719 | 1.719 | 0 | %100 |
| 14 | MP1A | Z | 2.978 | 2.978 | 0 | %100 |
| 15 | M43 | X | 1.385 | 1.385 | 0 | %100 |
| 16 | M43 | Z | 2.399 | 2.399 | 0 | %100 |
| 17 | M46 | X | 2.053 | 2.053 | 0 | %100 |
| 18 | M46 | Z | 3.556 | 3.556 | 0 | %100 |
| 19 | M51B | X | 0 | 0 | 0 | %100 |
| 20 | M51B | Z | 0 | 0 | 0 | %100 |
| 21 | M52B | X | 1.511 | 1.511 | 0 | %100 |
| 22 | M52B | Z | 2.617 | 2.617 | 0 | %100 |
| 23 | M76 | X | .673 | .673 | 0 | %100 |
| 24 | M76 | Z | 1.166 | 1.166 | 0 | %100 |
| 25 | M77 | X | 0 | 0 | 0 | %100 |
| 26 | M77 | Z | 0 | 0 | 0 | %100 |
| 27 | M80 | X | 0 | 0 | 0 | %100 |
| 28 | M80 | Z | 0 | 0 | 0 | %100 |
| 29 | M84 | X | .673 | .673 | 0 | %100 |
| 30 | M84 | Z | 1.166 | 1.166 | 0 | %100 |
| 31 | M85 | X | 2.05 | 2.05 | 0 | %100 |
| 32 | M85 | Z | 3.551 | 3.551 | 0 | %100 |
| 33 | M91 | X | 2.139 | 2.139 | 0 | %100 |
| 34 | M91 | Z | 3.705 | 3.705 | 0 | %100 |
| 35 | M34 | X | 0 | 0 | 0 | %100 |
| 36 | M34 | Z | 0 | 0 | 0 | %100 |
| 37 | M43A | X | 1.598 | 1.598 | 0 | %100 |
| 38 | M43A | Z | 2.769 | 2.769 | 0 | %100 |
| 39 | M52A | X | 2.273 | 2.273 | 0 | %100 |
| 40 | M52A | Z | 3.937 | 3.937 | 0 | %100 |
| 41 | M53 | X | 0 | 0 | 0 | %100 |
| 42 | M53 | Z | 0 | 0 | 0 | %100 |
| 43 | M54 | X | 0 | 0 | 0 | %100 |
| 44 | M54 | Z | 0 | 0 | 0 | %100 |
| 45 | M55 | X | 0 | 0 | 0 | %100 |
| 46 | M55 | Z | 0 | 0 | 0 | %100 |
| 47 | M58A | X | 1.511 | 1.511 | 0 | %100 |
| 48 | M58A | Z | 2.617 | 2.617 | 0 | %100 |
| 49 | M59A | X | 1.511 | 1.511 | 0 | %100 |
| 50 | M59A | Z | 2.617 | 2.617 | 0 | %100 |
| 51 | M63 | X | 2.693 | 2.693 | 0 | %100 |
| 52 | M63 | Z | 4.664 | 4.664 | 0 | %100 |
| 53 | M64 | X | 2.05 | 2.05 | 0 | %100 |
| 54 | M64 | Z | 3.551 | 3.551 | 0 | %100 |
| 55 | M66 | X | 2.139 | 2.139 | 0 | %100 |
| 56 | M66 | Z | 3.705 | 3.705 | 0 | %100 |
| 57 | M68 | X | 2.693 | 2.693 | 0 | %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 58 : Structure Wi (150 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | 4.664 | 4.664 | 0 %100 |
| 59 | M69 | X | 2.05 | 2.05 | 0 %100 |
| 60 | M69 | Z | 3.551 | 3.551 | 0 %100 |
| 61 | M71 | X | 2.139 | 2.139 | 0 %100 |
| 62 | M71 | Z | 3.705 | 3.705 | 0 %100 |
| 63 | M76A | X | .568 | .568 | 0 %100 |
| 64 | M76A | Z | .984 | .984 | 0 %100 |
| 65 | M77A | X | 1.385 | 1.385 | 0 %100 |
| 66 | M77A | Z | 2.399 | 2.399 | 0 %100 |
| 67 | M78 | X | 1.385 | 1.385 | 0 %100 |
| 68 | M78 | Z | 2.399 | 2.399 | 0 %100 |
| 69 | M79A | X | 2.053 | 2.053 | 0 %100 |
| 70 | M79A | Z | 3.556 | 3.556 | 0 %100 |
| 71 | M82 | X | 1.511 | 1.511 | 0 %100 |
| 72 | M82 | Z | 2.617 | 2.617 | 0 %100 |
| 73 | M83A | X | 0 | 0 | 0 %100 |
| 74 | M83A | Z | 0 | 0 | 0 %100 |
| 75 | M87 | X | .673 | .673 | 0 %100 |
| 76 | M87 | Z | 1.166 | 1.166 | 0 %100 |
| 77 | M88A | X | 2.05 | 2.05 | 0 %100 |
| 78 | M88A | Z | 3.551 | 3.551 | 0 %100 |
| 79 | M90 | X | 2.139 | 2.139 | 0 %100 |
| 80 | M90 | Z | 3.705 | 3.705 | 0 %100 |
| 81 | M92A | X | .673 | .673 | 0 %100 |
| 82 | M92A | Z | 1.166 | 1.166 | 0 %100 |
| 83 | M93 | X | 0 | 0 | 0 %100 |
| 84 | M93 | Z | 0 | 0 | 0 %100 |
| 85 | M95 | X | 0 | 0 | 0 %100 |
| 86 | M95 | Z | 0 | 0 | 0 %100 |
| 87 | M84B | X | 1.29 | 1.29 | 0 %100 |
| 88 | M84B | Z | 2.234 | 2.234 | 0 %100 |
| 89 | M89A | X | 0 | 0 | 0 %100 |
| 90 | M89A | Z | 0 | 0 | 0 %100 |
| 91 | M94A | X | 1.29 | 1.29 | 0 %100 |
| 92 | M94A | Z | 2.234 | 2.234 | 0 %100 |
| 93 | MP3C | X | 1.719 | 1.719 | 0 %100 |
| 94 | MP3C | Z | 2.978 | 2.978 | 0 %100 |
| 95 | MP4C | X | 1.719 | 1.719 | 0 %100 |
| 96 | MP4C | Z | 2.978 | 2.978 | 0 %100 |
| 97 | MP2C | X | 1.719 | 1.719 | 0 %100 |
| 98 | MP2C | Z | 2.978 | 2.978 | 0 %100 |
| 99 | MP1C | X | 1.719 | 1.719 | 0 %100 |
| 100 | MP1C | Z | 2.978 | 2.978 | 0 %100 |
| 101 | MP3B | X | 1.719 | 1.719 | 0 %100 |
| 102 | MP3B | Z | 2.978 | 2.978 | 0 %100 |
| 103 | MP4B | X | 1.719 | 1.719 | 0 %100 |
| 104 | MP4B | Z | 2.978 | 2.978 | 0 %100 |
| 105 | MP2B | X | 1.719 | 1.719 | 0 %100 |
| 106 | MP2B | Z | 2.978 | 2.978 | 0 %100 |
| 107 | MP1B | X | 1.719 | 1.719 | 0 %100 |
| 108 | MP1B | Z | 2.978 | 2.978 | 0 %100 |
| 109 | M109 | X | 1.159 | 1.159 | 0 %100 |
| 110 | M109 | Z | 2.008 | 2.008 | 0 %100 |
| 111 | M112 | X | 0 | 0 | 0 %100 |
| 112 | M112 | Z | 0 | 0 | 0 %100 |
| 113 | M115 | X | 1.159 | 1.159 | 0 %100 |
| 114 | M115 | Z | 2.008 | 2.008 | 0 %100 |

Member Distributed Loads (BLC 59 : Structure Wi (180 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k. | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | 0 | 0 | 0 | %100 |
| 2 | M1 | Z | 4.263 | 4.263 | 0 | %100 |
| 3 | M4 | X | 0 | 0 | 0 | %100 |
| 4 | M4 | Z | 0 | 0 | 0 | %100 |
| 5 | M10 | X | 0 | 0 | 0 | %100 |
| 6 | M10 | Z | 3.693 | 3.693 | 0 | %100 |
| 7 | MP3A | X | 0 | 0 | 0 | %100 |
| 8 | MP3A | Z | 3.439 | 3.439 | 0 | %100 |
| 9 | MP4A | X | 0 | 0 | 0 | %100 |
| 10 | MP4A | Z | 3.439 | 3.439 | 0 | %100 |
| 11 | MP2A | X | 0 | 0 | 0 | %100 |
| 12 | MP2A | Z | 3.439 | 3.439 | 0 | %100 |
| 13 | MP1A | X | 0 | 0 | 0 | %100 |
| 14 | MP1A | Z | 3.439 | 3.439 | 0 | %100 |
| 15 | M43 | X | 0 | 0 | 0 | %100 |
| 16 | M43 | Z | 3.693 | 3.693 | 0 | %100 |
| 17 | M46 | X | 0 | 0 | 0 | %100 |
| 18 | M46 | Z | 5.474 | 5.474 | 0 | %100 |
| 19 | M51B | X | 0 | 0 | 0 | %100 |
| 20 | M51B | Z | 1.007 | 1.007 | 0 | %100 |
| 21 | M52B | X | 0 | 0 | 0 | %100 |
| 22 | M52B | Z | 1.007 | 1.007 | 0 | %100 |
| 23 | M76 | X | 0 | 0 | 0 | %100 |
| 24 | M76 | Z | 0 | 0 | 0 | %100 |
| 25 | M77 | X | 0 | 0 | 0 | %100 |
| 26 | M77 | Z | 1.367 | 1.367 | 0 | %100 |
| 27 | M80 | X | 0 | 0 | 0 | %100 |
| 28 | M80 | Z | 1.426 | 1.426 | 0 | %100 |
| 29 | M84 | X | 0 | 0 | 0 | %100 |
| 30 | M84 | Z | 0 | 0 | 0 | %100 |
| 31 | M85 | X | 0 | 0 | 0 | %100 |
| 32 | M85 | Z | 1.367 | 1.367 | 0 | %100 |
| 33 | M91 | X | 0 | 0 | 0 | %100 |
| 34 | M91 | Z | 1.426 | 1.426 | 0 | %100 |
| 35 | M34 | X | 0 | 0 | 0 | %100 |
| 36 | M34 | Z | 1.066 | 1.066 | 0 | %100 |
| 37 | M43A | X | 0 | 0 | 0 | %100 |
| 38 | M43A | Z | 1.066 | 1.066 | 0 | %100 |
| 39 | M52A | X | 0 | 0 | 0 | %100 |
| 40 | M52A | Z | 3.409 | 3.409 | 0 | %100 |
| 41 | M53 | X | 0 | 0 | 0 | %100 |
| 42 | M53 | Z | .923 | .923 | 0 | %100 |
| 43 | M54 | X | 0 | 0 | 0 | %100 |
| 44 | M54 | Z | .923 | .923 | 0 | %100 |
| 45 | M55 | X | 0 | 0 | 0 | %100 |
| 46 | M55 | Z | 1.369 | 1.369 | 0 | %100 |
| 47 | M58A | X | 0 | 0 | 0 | %100 |
| 48 | M58A | Z | 1.007 | 1.007 | 0 | %100 |
| 49 | M59A | X | 0 | 0 | 0 | %100 |
| 50 | M59A | Z | 4.03 | 4.03 | 0 | %100 |
| 51 | M63 | X | 0 | 0 | 0 | %100 |
| 52 | M63 | Z | 4.039 | 4.039 | 0 | %100 |
| 53 | M64 | X | 0 | 0 | 0 | %100 |
| 54 | M64 | Z | 1.367 | 1.367 | 0 | %100 |
| 55 | M66 | X | 0 | 0 | 0 | %100 |
| 56 | M66 | Z | 1.426 | 1.426 | 0 | %100 |
| 57 | M68 | X | 0 | 0 | 0 | %100 |

Member Distributed Loads (BLC 59 : Structure Wi (180 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | 4.039 | 4.039 | 0 %100 |
| 59 | M69 | X | 0 | 0 | 0 %100 |
| 60 | M69 | Z | 5.467 | 5.467 | 0 %100 |
| 61 | M71 | X | 0 | 0 | 0 %100 |
| 62 | M71 | Z | 5.705 | 5.705 | 0 %100 |
| 63 | M76A | X | 0 | 0 | 0 %100 |
| 64 | M76A | Z | 3.409 | 3.409 | 0 %100 |
| 65 | M77A | X | 0 | 0 | 0 %100 |
| 66 | M77A | Z | .923 | .923 | 0 %100 |
| 67 | M78 | X | 0 | 0 | 0 %100 |
| 68 | M78 | Z | .923 | .923 | 0 %100 |
| 69 | M79A | X | 0 | 0 | 0 %100 |
| 70 | M79A | Z | 1.369 | 1.369 | 0 %100 |
| 71 | M82 | X | 0 | 0 | 0 %100 |
| 72 | M82 | Z | 4.03 | 4.03 | 0 %100 |
| 73 | M83A | X | 0 | 0 | 0 %100 |
| 74 | M83A | Z | 1.007 | 1.007 | 0 %100 |
| 75 | M87 | X | 0 | 0 | 0 %100 |
| 76 | M87 | Z | 4.039 | 4.039 | 0 %100 |
| 77 | M88A | X | 0 | 0 | 0 %100 |
| 78 | M88A | Z | 5.467 | 5.467 | 0 %100 |
| 79 | M90 | X | 0 | 0 | 0 %100 |
| 80 | M90 | Z | 5.705 | 5.705 | 0 %100 |
| 81 | M92A | X | 0 | 0 | 0 %100 |
| 82 | M92A | Z | 4.039 | 4.039 | 0 %100 |
| 83 | M93 | X | 0 | 0 | 0 %100 |
| 84 | M93 | Z | 1.367 | 1.367 | 0 %100 |
| 85 | M95 | X | 0 | 0 | 0 %100 |
| 86 | M95 | Z | 1.426 | 1.426 | 0 %100 |
| 87 | M84B | X | 0 | 0 | 0 %100 |
| 88 | M84B | Z | 3.439 | 3.439 | 0 %100 |
| 89 | M89A | X | 0 | 0 | 0 %100 |
| 90 | M89A | Z | .86 | .86 | 0 %100 |
| 91 | M94A | X | 0 | 0 | 0 %100 |
| 92 | M94A | Z | .86 | .86 | 0 %100 |
| 93 | MP3C | X | 0 | 0 | 0 %100 |
| 94 | MP3C | Z | 3.439 | 3.439 | 0 %100 |
| 95 | MP4C | X | 0 | 0 | 0 %100 |
| 96 | MP4C | Z | 3.439 | 3.439 | 0 %100 |
| 97 | MP2C | X | 0 | 0 | 0 %100 |
| 98 | MP2C | Z | 3.439 | 3.439 | 0 %100 |
| 99 | MP1C | X | 0 | 0 | 0 %100 |
| 100 | MP1C | Z | 3.439 | 3.439 | 0 %100 |
| 101 | MP3B | X | 0 | 0 | 0 %100 |
| 102 | MP3B | Z | 3.439 | 3.439 | 0 %100 |
| 103 | MP4B | X | 0 | 0 | 0 %100 |
| 104 | MP4B | Z | 3.439 | 3.439 | 0 %100 |
| 105 | MP2B | X | 0 | 0 | 0 %100 |
| 106 | MP2B | Z | 3.439 | 3.439 | 0 %100 |
| 107 | MP1B | X | 0 | 0 | 0 %100 |
| 108 | MP1B | Z | 3.439 | 3.439 | 0 %100 |
| 109 | M109 | X | 0 | 0 | 0 %100 |
| 110 | M109 | Z | 3.091 | 3.091 | 0 %100 |
| 111 | M112 | X | 0 | 0 | 0 %100 |
| 112 | M112 | Z | .773 | .773 | 0 %100 |
| 113 | M115 | X | 0 | 0 | 0 %100 |
| 114 | M115 | Z | .773 | .773 | 0 %100 |

Member Distributed Loads (BLC 60 : Structure Wi (210 Deg))

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | -1.598 | -1.598 | 0 %100 |
| 2 | M1 | Z | 2.769 | 2.769 | 0 %100 |
| 3 | M4 | X | -.568 | -.568 | 0 %100 |
| 4 | M4 | Z | .984 | .984 | 0 %100 |
| 5 | M10 | X | -1.385 | -1.385 | 0 %100 |
| 6 | M10 | Z | 2.399 | 2.399 | 0 %100 |
| 7 | MP3A | X | -1.719 | -1.719 | 0 %100 |
| 8 | MP3A | Z | 2.978 | 2.978 | 0 %100 |
| 9 | MP4A | X | -1.719 | -1.719 | 0 %100 |
| 10 | MP4A | Z | 2.978 | 2.978 | 0 %100 |
| 11 | MP2A | X | -1.719 | -1.719 | 0 %100 |
| 12 | MP2A | Z | 2.978 | 2.978 | 0 %100 |
| 13 | MP1A | X | -1.719 | -1.719 | 0 %100 |
| 14 | MP1A | Z | 2.978 | 2.978 | 0 %100 |
| 15 | M43 | X | -1.385 | -1.385 | 0 %100 |
| 16 | M43 | Z | 2.399 | 2.399 | 0 %100 |
| 17 | M46 | X | -2.053 | -2.053 | 0 %100 |
| 18 | M46 | Z | 3.556 | 3.556 | 0 %100 |
| 19 | M51B | X | -1.511 | -1.511 | 0 %100 |
| 20 | M51B | Z | 2.617 | 2.617 | 0 %100 |
| 21 | M52B | X | 0 | 0 | 0 %100 |
| 22 | M52B | Z | 0 | 0 | 0 %100 |
| 23 | M76 | X | -.673 | -.673 | 0 %100 |
| 24 | M76 | Z | 1.166 | 1.166 | 0 %100 |
| 25 | M77 | X | -2.05 | -2.05 | 0 %100 |
| 26 | M77 | Z | 3.551 | 3.551 | 0 %100 |
| 27 | M80 | X | -2.139 | -2.139 | 0 %100 |
| 28 | M80 | Z | 3.705 | 3.705 | 0 %100 |
| 29 | M84 | X | -.673 | -.673 | 0 %100 |
| 30 | M84 | Z | 1.166 | 1.166 | 0 %100 |
| 31 | M85 | X | 0 | 0 | 0 %100 |
| 32 | M85 | Z | 0 | 0 | 0 %100 |
| 33 | M91 | X | 0 | 0 | 0 %100 |
| 34 | M91 | Z | 0 | 0 | 0 %100 |
| 35 | M34 | X | -1.598 | -1.598 | 0 %100 |
| 36 | M34 | Z | 2.769 | 2.769 | 0 %100 |
| 37 | M43A | X | 0 | 0 | 0 %100 |
| 38 | M43A | Z | 0 | 0 | 0 %100 |
| 39 | M52A | X | -.568 | -.568 | 0 %100 |
| 40 | M52A | Z | .984 | .984 | 0 %100 |
| 41 | M53 | X | -1.385 | -1.385 | 0 %100 |
| 42 | M53 | Z | 2.399 | 2.399 | 0 %100 |
| 43 | M54 | X | -1.385 | -1.385 | 0 %100 |
| 44 | M54 | Z | 2.399 | 2.399 | 0 %100 |
| 45 | M55 | X | -2.053 | -2.053 | 0 %100 |
| 46 | M55 | Z | 3.556 | 3.556 | 0 %100 |
| 47 | M58A | X | 0 | 0 | 0 %100 |
| 48 | M58A | Z | 0 | 0 | 0 %100 |
| 49 | M59A | X | -1.511 | -1.511 | 0 %100 |
| 50 | M59A | Z | 2.617 | 2.617 | 0 %100 |
| 51 | M63 | X | -.673 | -.673 | 0 %100 |
| 52 | M63 | Z | 1.166 | 1.166 | 0 %100 |
| 53 | M64 | X | 0 | 0 | 0 %100 |
| 54 | M64 | Z | 0 | 0 | 0 %100 |
| 55 | M66 | X | 0 | 0 | 0 %100 |
| 56 | M66 | Z | 0 | 0 | 0 %100 |
| 57 | M68 | X | -.673 | -.673 | 0 %100 |

Member Distributed Loads (BLC 60 : Structure Wi (210 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 58 | M68 | Z | 1.166 | 1.166 | 0 %100 |
| 59 | M69 | X | -2.05 | -2.05 | 0 %100 |
| 60 | M69 | Z | 3.551 | 3.551 | 0 %100 |
| 61 | M71 | X | -2.139 | -2.139 | 0 %100 |
| 62 | M71 | Z | 3.705 | 3.705 | 0 %100 |
| 63 | M76A | X | -2.273 | -2.273 | 0 %100 |
| 64 | M76A | Z | 3.937 | 3.937 | 0 %100 |
| 65 | M77A | X | 0 | 0 | 0 %100 |
| 66 | M77A | Z | 0 | 0 | 0 %100 |
| 67 | M78 | X | 0 | 0 | 0 %100 |
| 68 | M78 | Z | 0 | 0 | 0 %100 |
| 69 | M79A | X | 0 | 0 | 0 %100 |
| 70 | M79A | Z | 0 | 0 | 0 %100 |
| 71 | M82 | X | -1.511 | -1.511 | 0 %100 |
| 72 | M82 | Z | 2.617 | 2.617 | 0 %100 |
| 73 | M83A | X | -1.511 | -1.511 | 0 %100 |
| 74 | M83A | Z | 2.617 | 2.617 | 0 %100 |
| 75 | M87 | X | -2.693 | -2.693 | 0 %100 |
| 76 | M87 | Z | 4.664 | 4.664 | 0 %100 |
| 77 | M88A | X | -2.05 | -2.05 | 0 %100 |
| 78 | M88A | Z | 3.551 | 3.551 | 0 %100 |
| 79 | M90 | X | -2.139 | -2.139 | 0 %100 |
| 80 | M90 | Z | 3.705 | 3.705 | 0 %100 |
| 81 | M92A | X | -2.693 | -2.693 | 0 %100 |
| 82 | M92A | Z | 4.664 | 4.664 | 0 %100 |
| 83 | M93 | X | -2.05 | -2.05 | 0 %100 |
| 84 | M93 | Z | 3.551 | 3.551 | 0 %100 |
| 85 | M95 | X | -2.139 | -2.139 | 0 %100 |
| 86 | M95 | Z | 3.705 | 3.705 | 0 %100 |
| 87 | M84B | X | -1.29 | -1.29 | 0 %100 |
| 88 | M84B | Z | 2.234 | 2.234 | 0 %100 |
| 89 | M89A | X | -1.29 | -1.29 | 0 %100 |
| 90 | M89A | Z | 2.234 | 2.234 | 0 %100 |
| 91 | M94A | X | 0 | 0 | 0 %100 |
| 92 | M94A | Z | 0 | 0 | 0 %100 |
| 93 | MP3C | X | -1.719 | -1.719 | 0 %100 |
| 94 | MP3C | Z | 2.978 | 2.978 | 0 %100 |
| 95 | MP4C | X | -1.719 | -1.719 | 0 %100 |
| 96 | MP4C | Z | 2.978 | 2.978 | 0 %100 |
| 97 | MP2C | X | -1.719 | -1.719 | 0 %100 |
| 98 | MP2C | Z | 2.978 | 2.978 | 0 %100 |
| 99 | MP1C | X | -1.719 | -1.719 | 0 %100 |
| 100 | MP1C | Z | 2.978 | 2.978 | 0 %100 |
| 101 | MP3B | X | -1.719 | -1.719 | 0 %100 |
| 102 | MP3B | Z | 2.978 | 2.978 | 0 %100 |
| 103 | MP4B | X | -1.719 | -1.719 | 0 %100 |
| 104 | MP4B | Z | 2.978 | 2.978 | 0 %100 |
| 105 | MP2B | X | -1.719 | -1.719 | 0 %100 |
| 106 | MP2B | Z | 2.978 | 2.978 | 0 %100 |
| 107 | MP1B | X | -1.719 | -1.719 | 0 %100 |
| 108 | MP1B | Z | 2.978 | 2.978 | 0 %100 |
| 109 | M109 | X | -1.159 | -1.159 | 0 %100 |
| 110 | M109 | Z | 2.008 | 2.008 | 0 %100 |
| 111 | M112 | X | -1.159 | -1.159 | 0 %100 |
| 112 | M112 | Z | 2.008 | 2.008 | 0 %100 |
| 113 | M115 | X | 0 | 0 | 0 %100 |
| 114 | M115 | Z | 0 | 0 | 0 %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 61 : Structure Wi (240 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft,F,ksf] | End Magnitude[lb/ft,F,k] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | -.923 | -.923 | 0 | %100 |
| 2 | M1 | Z | .533 | .533 | 0 | %100 |
| 3 | M4 | X | -2.952 | -2.952 | 0 | %100 |
| 4 | M4 | Z | 1.705 | 1.705 | 0 | %100 |
| 5 | M10 | X | -.8 | -.8 | 0 | %100 |
| 6 | M10 | Z | .462 | .462 | 0 | %100 |
| 7 | MP3A | X | -2.978 | -2.978 | 0 | %100 |
| 8 | MP3A | Z | 1.719 | 1.719 | 0 | %100 |
| 9 | MP4A | X | -2.978 | -2.978 | 0 | %100 |
| 10 | MP4A | Z | 1.719 | 1.719 | 0 | %100 |
| 11 | MP2A | X | -2.978 | -2.978 | 0 | %100 |
| 12 | MP2A | Z | 1.719 | 1.719 | 0 | %100 |
| 13 | MP1A | X | -2.978 | -2.978 | 0 | %100 |
| 14 | MP1A | Z | 1.719 | 1.719 | 0 | %100 |
| 15 | M43 | X | -.8 | -.8 | 0 | %100 |
| 16 | M43 | Z | .462 | .462 | 0 | %100 |
| 17 | M46 | X | -1.185 | -1.185 | 0 | %100 |
| 18 | M46 | Z | .684 | .684 | 0 | %100 |
| 19 | M51B | X | -3.49 | -3.49 | 0 | %100 |
| 20 | M51B | Z | 2.015 | 2.015 | 0 | %100 |
| 21 | M52B | X | -.872 | -.872 | 0 | %100 |
| 22 | M52B | Z | .504 | .504 | 0 | %100 |
| 23 | M76 | X | -3.498 | -3.498 | 0 | %100 |
| 24 | M76 | Z | 2.019 | 2.019 | 0 | %100 |
| 25 | M77 | X | -4.734 | -4.734 | 0 | %100 |
| 26 | M77 | Z | 2.733 | 2.733 | 0 | %100 |
| 27 | M80 | X | -4.941 | -4.941 | 0 | %100 |
| 28 | M80 | Z | 2.852 | 2.852 | 0 | %100 |
| 29 | M84 | X | -3.498 | -3.498 | 0 | %100 |
| 30 | M84 | Z | 2.019 | 2.019 | 0 | %100 |
| 31 | M85 | X | -1.184 | -1.184 | 0 | %100 |
| 32 | M85 | Z | .683 | .683 | 0 | %100 |
| 33 | M91 | X | -1.235 | -1.235 | 0 | %100 |
| 34 | M91 | Z | .713 | .713 | 0 | %100 |
| 35 | M34 | X | -3.692 | -3.692 | 0 | %100 |
| 36 | M34 | Z | 2.131 | 2.131 | 0 | %100 |
| 37 | M43A | X | -.923 | -.923 | 0 | %100 |
| 38 | M43A | Z | .533 | .533 | 0 | %100 |
| 39 | M52A | X | 0 | 0 | 0 | %100 |
| 40 | M52A | Z | 0 | 0 | 0 | %100 |
| 41 | M53 | X | -3.199 | -3.199 | 0 | %100 |
| 42 | M53 | Z | 1.847 | 1.847 | 0 | %100 |
| 43 | M54 | X | -3.199 | -3.199 | 0 | %100 |
| 44 | M54 | Z | 1.847 | 1.847 | 0 | %100 |
| 45 | M55 | X | -4.741 | -4.741 | 0 | %100 |
| 46 | M55 | Z | 2.737 | 2.737 | 0 | %100 |
| 47 | M58A | X | -.872 | -.872 | 0 | %100 |
| 48 | M58A | Z | .504 | .504 | 0 | %100 |
| 49 | M59A | X | -.872 | -.872 | 0 | %100 |
| 50 | M59A | Z | .504 | .504 | 0 | %100 |
| 51 | M63 | X | 0 | 0 | 0 | %100 |
| 52 | M63 | Z | 0 | 0 | 0 | %100 |
| 53 | M64 | X | -1.184 | -1.184 | 0 | %100 |
| 54 | M64 | Z | .683 | .683 | 0 | %100 |
| 55 | M66 | X | -1.235 | -1.235 | 0 | %100 |
| 56 | M66 | Z | .713 | .713 | 0 | %100 |
| 57 | M68 | X | 0 | 0 | 0 | %100 |

Member Distributed Loads (BLC 61 : Structure Wi (240 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 58 | M68 | Z | 0 | 0 | %100 |
| 59 | M69 | X | -1.184 | -1.184 | %100 |
| 60 | M69 | Z | .683 | .683 | %100 |
| 61 | M71 | X | -1.235 | -1.235 | %100 |
| 62 | M71 | Z | .713 | .713 | %100 |
| 63 | M76A | X | -2.952 | -2.952 | %100 |
| 64 | M76A | Z | 1.705 | 1.705 | %100 |
| 65 | M77A | X | -.8 | -.8 | %100 |
| 66 | M77A | Z | .462 | .462 | %100 |
| 67 | M78 | X | -.8 | -.8 | %100 |
| 68 | M78 | Z | .462 | .462 | %100 |
| 69 | M79A | X | -1.185 | -1.185 | %100 |
| 70 | M79A | Z | .684 | .684 | %100 |
| 71 | M82 | X | -.872 | -.872 | %100 |
| 72 | M82 | Z | .504 | .504 | %100 |
| 73 | M83A | X | -3.49 | -3.49 | %100 |
| 74 | M83A | Z | 2.015 | 2.015 | %100 |
| 75 | M87 | X | -3.498 | -3.498 | %100 |
| 76 | M87 | Z | 2.019 | 2.019 | %100 |
| 77 | M88A | X | -1.184 | -1.184 | %100 |
| 78 | M88A | Z | .683 | .683 | %100 |
| 79 | M90 | X | -1.235 | -1.235 | %100 |
| 80 | M90 | Z | .713 | .713 | %100 |
| 81 | M92A | X | -3.498 | -3.498 | %100 |
| 82 | M92A | Z | 2.019 | 2.019 | %100 |
| 83 | M93 | X | -4.734 | -4.734 | %100 |
| 84 | M93 | Z | 2.733 | 2.733 | %100 |
| 85 | M95 | X | -4.941 | -4.941 | %100 |
| 86 | M95 | Z | 2.852 | 2.852 | %100 |
| 87 | M84B | X | -.745 | -.745 | %100 |
| 88 | M84B | Z | .43 | .43 | %100 |
| 89 | M89A | X | -2.978 | -2.978 | %100 |
| 90 | M89A | Z | 1.719 | 1.719 | %100 |
| 91 | M94A | X | -.745 | -.745 | %100 |
| 92 | M94A | Z | .43 | .43 | %100 |
| 93 | MP3C | X | -2.978 | -2.978 | %100 |
| 94 | MP3C | Z | 1.719 | 1.719 | %100 |
| 95 | MP4C | X | -2.978 | -2.978 | %100 |
| 96 | MP4C | Z | 1.719 | 1.719 | %100 |
| 97 | MP2C | X | -2.978 | -2.978 | %100 |
| 98 | MP2C | Z | 1.719 | 1.719 | %100 |
| 99 | MP1C | X | -2.978 | -2.978 | %100 |
| 100 | MP1C | Z | 1.719 | 1.719 | %100 |
| 101 | MP3B | X | -2.978 | -2.978 | %100 |
| 102 | MP3B | Z | 1.719 | 1.719 | %100 |
| 103 | MP4B | X | -2.978 | -2.978 | %100 |
| 104 | MP4B | Z | 1.719 | 1.719 | %100 |
| 105 | MP2B | X | -2.978 | -2.978 | %100 |
| 106 | MP2B | Z | 1.719 | 1.719 | %100 |
| 107 | MP1B | X | -2.978 | -2.978 | %100 |
| 108 | MP1B | Z | 1.719 | 1.719 | %100 |
| 109 | M109 | X | -.669 | -.669 | %100 |
| 110 | M109 | Z | .386 | .386 | %100 |
| 111 | M112 | X | -2.677 | -2.677 | %100 |
| 112 | M112 | Z | 1.546 | 1.546 | %100 |
| 113 | M115 | X | -.669 | -.669 | %100 |
| 114 | M115 | Z | .386 | .386 | %100 |

Member Distributed Loads (BLC 62 : Structure Wi (270 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k. | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | 0 | 0 | 0 | %100 |
| 2 | M1 | Z | 0 | 0 | 0 | %100 |
| 3 | M4 | X | -4.546 | -4.546 | 0 | %100 |
| 4 | M4 | Z | 0 | 0 | 0 | %100 |
| 5 | M10 | X | 0 | 0 | 0 | %100 |
| 6 | M10 | Z | 0 | 0 | 0 | %100 |
| 7 | MP3A | X | -3.439 | -3.439 | 0 | %100 |
| 8 | MP3A | Z | 0 | 0 | 0 | %100 |
| 9 | MP4A | X | -3.439 | -3.439 | 0 | %100 |
| 10 | MP4A | Z | 0 | 0 | 0 | %100 |
| 11 | MP2A | X | -3.439 | -3.439 | 0 | %100 |
| 12 | MP2A | Z | 0 | 0 | 0 | %100 |
| 13 | MP1A | X | -3.439 | -3.439 | 0 | %100 |
| 14 | MP1A | Z | 0 | 0 | 0 | %100 |
| 15 | M43 | X | 0 | 0 | 0 | %100 |
| 16 | M43 | Z | 0 | 0 | 0 | %100 |
| 17 | M46 | X | 0 | 0 | 0 | %100 |
| 18 | M46 | Z | 0 | 0 | 0 | %100 |
| 19 | M51B | X | -3.022 | -3.022 | 0 | %100 |
| 20 | M51B | Z | 0 | 0 | 0 | %100 |
| 21 | M52B | X | -3.022 | -3.022 | 0 | %100 |
| 22 | M52B | Z | 0 | 0 | 0 | %100 |
| 23 | M76 | X | -5.385 | -5.385 | 0 | %100 |
| 24 | M76 | Z | 0 | 0 | 0 | %100 |
| 25 | M77 | X | -4.1 | -4.1 | 0 | %100 |
| 26 | M77 | Z | 0 | 0 | 0 | %100 |
| 27 | M80 | X | -4.279 | -4.279 | 0 | %100 |
| 28 | M80 | Z | 0 | 0 | 0 | %100 |
| 29 | M84 | X | -5.385 | -5.385 | 0 | %100 |
| 30 | M84 | Z | 0 | 0 | 0 | %100 |
| 31 | M85 | X | -4.1 | -4.1 | 0 | %100 |
| 32 | M85 | Z | 0 | 0 | 0 | %100 |
| 33 | M91 | X | -4.279 | -4.279 | 0 | %100 |
| 34 | M91 | Z | 0 | 0 | 0 | %100 |
| 35 | M34 | X | -3.197 | -3.197 | 0 | %100 |
| 36 | M34 | Z | 0 | 0 | 0 | %100 |
| 37 | M43A | X | -3.197 | -3.197 | 0 | %100 |
| 38 | M43A | Z | 0 | 0 | 0 | %100 |
| 39 | M52A | X | -1.136 | -1.136 | 0 | %100 |
| 40 | M52A | Z | 0 | 0 | 0 | %100 |
| 41 | M53 | X | -2.77 | -2.77 | 0 | %100 |
| 42 | M53 | Z | 0 | 0 | 0 | %100 |
| 43 | M54 | X | -2.77 | -2.77 | 0 | %100 |
| 44 | M54 | Z | 0 | 0 | 0 | %100 |
| 45 | M55 | X | -4.106 | -4.106 | 0 | %100 |
| 46 | M55 | Z | 0 | 0 | 0 | %100 |
| 47 | M58A | X | -3.022 | -3.022 | 0 | %100 |
| 48 | M58A | Z | 0 | 0 | 0 | %100 |
| 49 | M59A | X | 0 | 0 | 0 | %100 |
| 50 | M59A | Z | 0 | 0 | 0 | %100 |
| 51 | M63 | X | -1.346 | -1.346 | 0 | %100 |
| 52 | M63 | Z | 0 | 0 | 0 | %100 |
| 53 | M64 | X | -4.1 | -4.1 | 0 | %100 |
| 54 | M64 | Z | 0 | 0 | 0 | %100 |
| 55 | M66 | X | -4.279 | -4.279 | 0 | %100 |
| 56 | M66 | Z | 0 | 0 | 0 | %100 |
| 57 | M68 | X | -1.346 | -1.346 | 0 | %100 |

Member Distributed Loads (BLC 62 : Structure Wi (270 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k... | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 58 | M68 | Z | 0 | 0 | %100 |
| 59 | M69 | X | 0 | 0 | %100 |
| 60 | M69 | Z | 0 | 0 | %100 |
| 61 | M71 | X | 0 | 0 | %100 |
| 62 | M71 | Z | 0 | 0 | %100 |
| 63 | M76A | X | -1.136 | -1.136 | %100 |
| 64 | M76A | Z | 0 | 0 | %100 |
| 65 | M77A | X | -2.77 | -2.77 | %100 |
| 66 | M77A | Z | 0 | 0 | %100 |
| 67 | M78 | X | -2.77 | -2.77 | %100 |
| 68 | M78 | Z | 0 | 0 | %100 |
| 69 | M79A | X | -4.106 | -4.106 | %100 |
| 70 | M79A | Z | 0 | 0 | %100 |
| 71 | M82 | X | 0 | 0 | %100 |
| 72 | M82 | Z | 0 | 0 | %100 |
| 73 | M83A | X | -3.022 | -3.022 | %100 |
| 74 | M83A | Z | 0 | 0 | %100 |
| 75 | M87 | X | -1.346 | -1.346 | %100 |
| 76 | M87 | Z | 0 | 0 | %100 |
| 77 | M88A | X | 0 | 0 | %100 |
| 78 | M88A | Z | 0 | 0 | %100 |
| 79 | M90 | X | 0 | 0 | %100 |
| 80 | M90 | Z | 0 | 0 | %100 |
| 81 | M92A | X | -1.346 | -1.346 | %100 |
| 82 | M92A | Z | 0 | 0 | %100 |
| 83 | M93 | X | -4.1 | -4.1 | %100 |
| 84 | M93 | Z | 0 | 0 | %100 |
| 85 | M95 | X | -4.279 | -4.279 | %100 |
| 86 | M95 | Z | 0 | 0 | %100 |
| 87 | M84B | X | 0 | 0 | %100 |
| 88 | M84B | Z | 0 | 0 | %100 |
| 89 | M89A | X | -2.579 | -2.579 | %100 |
| 90 | M89A | Z | 0 | 0 | %100 |
| 91 | M94A | X | -2.579 | -2.579 | %100 |
| 92 | M94A | Z | 0 | 0 | %100 |
| 93 | MP3C | X | -3.439 | -3.439 | %100 |
| 94 | MP3C | Z | 0 | 0 | %100 |
| 95 | MP4C | X | -3.439 | -3.439 | %100 |
| 96 | MP4C | Z | 0 | 0 | %100 |
| 97 | MP2C | X | -3.439 | -3.439 | %100 |
| 98 | MP2C | Z | 0 | 0 | %100 |
| 99 | MP1C | X | -3.439 | -3.439 | %100 |
| 100 | MP1C | Z | 0 | 0 | %100 |
| 101 | MP3B | X | -3.439 | -3.439 | %100 |
| 102 | MP3B | Z | 0 | 0 | %100 |
| 103 | MP4B | X | -3.439 | -3.439 | %100 |
| 104 | MP4B | Z | 0 | 0 | %100 |
| 105 | MP2B | X | -3.439 | -3.439 | %100 |
| 106 | MP2B | Z | 0 | 0 | %100 |
| 107 | MP1B | X | -3.439 | -3.439 | %100 |
| 108 | MP1B | Z | 0 | 0 | %100 |
| 109 | M109 | X | 0 | 0 | %100 |
| 110 | M109 | Z | 0 | 0 | %100 |
| 111 | M112 | X | -2.319 | -2.319 | %100 |
| 112 | M112 | Z | 0 | 0 | %100 |
| 113 | M115 | X | -2.319 | -2.319 | %100 |
| 114 | M115 | Z | 0 | 0 | %100 |

Member Distributed Loads (BLC 63 : Structure Wi (300 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft,F,ksf] | End Magnitude[lb/ft,F,k] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | -923 | -923 | 0 | %100 |
| 2 | M1 | Z | -533 | -533 | 0 | %100 |
| 3 | M4 | X | -2.952 | -2.952 | 0 | %100 |
| 4 | M4 | Z | -1.705 | -1.705 | 0 | %100 |
| 5 | M10 | X | -8 | -8 | 0 | %100 |
| 6 | M10 | Z | -462 | -462 | 0 | %100 |
| 7 | MP3A | X | -2.978 | -2.978 | 0 | %100 |
| 8 | MP3A | Z | -1.719 | -1.719 | 0 | %100 |
| 9 | MP4A | X | -2.978 | -2.978 | 0 | %100 |
| 10 | MP4A | Z | -1.719 | -1.719 | 0 | %100 |
| 11 | MP2A | X | -2.978 | -2.978 | 0 | %100 |
| 12 | MP2A | Z | -1.719 | -1.719 | 0 | %100 |
| 13 | MP1A | X | -2.978 | -2.978 | 0 | %100 |
| 14 | MP1A | Z | -1.719 | -1.719 | 0 | %100 |
| 15 | M43 | X | -8 | -8 | 0 | %100 |
| 16 | M43 | Z | -462 | -462 | 0 | %100 |
| 17 | M46 | X | -1.185 | -1.185 | 0 | %100 |
| 18 | M46 | Z | -684 | -684 | 0 | %100 |
| 19 | M51B | X | -872 | -872 | 0 | %100 |
| 20 | M51B | Z | -504 | -504 | 0 | %100 |
| 21 | M52B | X | -3.49 | -3.49 | 0 | %100 |
| 22 | M52B | Z | -2.015 | -2.015 | 0 | %100 |
| 23 | M76 | X | -3.498 | -3.498 | 0 | %100 |
| 24 | M76 | Z | -2.019 | -2.019 | 0 | %100 |
| 25 | M77 | X | -1.184 | -1.184 | 0 | %100 |
| 26 | M77 | Z | -683 | -683 | 0 | %100 |
| 27 | M80 | X | -1.235 | -1.235 | 0 | %100 |
| 28 | M80 | Z | -713 | -713 | 0 | %100 |
| 29 | M84 | X | -3.498 | -3.498 | 0 | %100 |
| 30 | M84 | Z | -2.019 | -2.019 | 0 | %100 |
| 31 | M85 | X | -4.734 | -4.734 | 0 | %100 |
| 32 | M85 | Z | -2.733 | -2.733 | 0 | %100 |
| 33 | M91 | X | -4.941 | -4.941 | 0 | %100 |
| 34 | M91 | Z | -2.852 | -2.852 | 0 | %100 |
| 35 | M34 | X | -923 | -923 | 0 | %100 |
| 36 | M34 | Z | -533 | -533 | 0 | %100 |
| 37 | M43A | X | -3.692 | -3.692 | 0 | %100 |
| 38 | M43A | Z | -2.131 | -2.131 | 0 | %100 |
| 39 | M52A | X | -2.952 | -2.952 | 0 | %100 |
| 40 | M52A | Z | -1.705 | -1.705 | 0 | %100 |
| 41 | M53 | X | -8 | -8 | 0 | %100 |
| 42 | M53 | Z | -462 | -462 | 0 | %100 |
| 43 | M54 | X | -8 | -8 | 0 | %100 |
| 44 | M54 | Z | -462 | -462 | 0 | %100 |
| 45 | M55 | X | -1.185 | -1.185 | 0 | %100 |
| 46 | M55 | Z | -684 | -684 | 0 | %100 |
| 47 | M58A | X | -3.49 | -3.49 | 0 | %100 |
| 48 | M58A | Z | -2.015 | -2.015 | 0 | %100 |
| 49 | M59A | X | -872 | -872 | 0 | %100 |
| 50 | M59A | Z | -504 | -504 | 0 | %100 |
| 51 | M63 | X | -3.498 | -3.498 | 0 | %100 |
| 52 | M63 | Z | -2.019 | -2.019 | 0 | %100 |
| 53 | M64 | X | -4.734 | -4.734 | 0 | %100 |
| 54 | M64 | Z | -2.733 | -2.733 | 0 | %100 |
| 55 | M66 | X | -4.941 | -4.941 | 0 | %100 |
| 56 | M66 | Z | -2.852 | -2.852 | 0 | %100 |
| 57 | M68 | X | -3.498 | -3.498 | 0 | %100 |

Member Distributed Loads (BLC 63 : Structure Wi (300 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | -2.019 | -2.019 | 0 %100 |
| 59 | M69 | X | -1.184 | -1.184 | 0 %100 |
| 60 | M69 | Z | -.683 | -.683 | 0 %100 |
| 61 | M71 | X | -1.235 | -1.235 | 0 %100 |
| 62 | M71 | Z | -.713 | -.713 | 0 %100 |
| 63 | M76A | X | 0 | 0 | 0 %100 |
| 64 | M76A | Z | 0 | 0 | 0 %100 |
| 65 | M77A | X | -3.199 | -3.199 | 0 %100 |
| 66 | M77A | Z | -1.847 | -1.847 | 0 %100 |
| 67 | M78 | X | -3.199 | -3.199 | 0 %100 |
| 68 | M78 | Z | -1.847 | -1.847 | 0 %100 |
| 69 | M79A | X | -4.741 | -4.741 | 0 %100 |
| 70 | M79A | Z | -2.737 | -2.737 | 0 %100 |
| 71 | M82 | X | -.872 | -.872 | 0 %100 |
| 72 | M82 | Z | -.504 | -.504 | 0 %100 |
| 73 | M83A | X | -.872 | -.872 | 0 %100 |
| 74 | M83A | Z | -.504 | -.504 | 0 %100 |
| 75 | M87 | X | 0 | 0 | 0 %100 |
| 76 | M87 | Z | 0 | 0 | 0 %100 |
| 77 | M88A | X | -1.184 | -1.184 | 0 %100 |
| 78 | M88A | Z | -.683 | -.683 | 0 %100 |
| 79 | M90 | X | -1.235 | -1.235 | 0 %100 |
| 80 | M90 | Z | -.713 | -.713 | 0 %100 |
| 81 | M92A | X | 0 | 0 | 0 %100 |
| 82 | M92A | Z | 0 | 0 | 0 %100 |
| 83 | M93 | X | -1.184 | -1.184 | 0 %100 |
| 84 | M93 | Z | -.683 | -.683 | 0 %100 |
| 85 | M95 | X | -1.235 | -1.235 | 0 %100 |
| 86 | M95 | Z | -.713 | -.713 | 0 %100 |
| 87 | M84B | X | -.745 | -.745 | 0 %100 |
| 88 | M84B | Z | -.43 | -.43 | 0 %100 |
| 89 | M89A | X | -.745 | -.745 | 0 %100 |
| 90 | M89A | Z | -.43 | -.43 | 0 %100 |
| 91 | M94A | X | -2.978 | -2.978 | 0 %100 |
| 92 | M94A | Z | -1.719 | -1.719 | 0 %100 |
| 93 | MP3C | X | -2.978 | -2.978 | 0 %100 |
| 94 | MP3C | Z | -1.719 | -1.719 | 0 %100 |
| 95 | MP4C | X | -2.978 | -2.978 | 0 %100 |
| 96 | MP4C | Z | -1.719 | -1.719 | 0 %100 |
| 97 | MP2C | X | -2.978 | -2.978 | 0 %100 |
| 98 | MP2C | Z | -1.719 | -1.719 | 0 %100 |
| 99 | MP1C | X | -2.978 | -2.978 | 0 %100 |
| 100 | MP1C | Z | -1.719 | -1.719 | 0 %100 |
| 101 | MP3B | X | -2.978 | -2.978 | 0 %100 |
| 102 | MP3B | Z | -1.719 | -1.719 | 0 %100 |
| 103 | MP4B | X | -2.978 | -2.978 | 0 %100 |
| 104 | MP4B | Z | -1.719 | -1.719 | 0 %100 |
| 105 | MP2B | X | -2.978 | -2.978 | 0 %100 |
| 106 | MP2B | Z | -1.719 | -1.719 | 0 %100 |
| 107 | MP1B | X | -2.978 | -2.978 | 0 %100 |
| 108 | MP1B | Z | -1.719 | -1.719 | 0 %100 |
| 109 | M109 | X | -.669 | -.669 | 0 %100 |
| 110 | M109 | Z | -.386 | -.386 | 0 %100 |
| 111 | M112 | X | -.669 | -.669 | 0 %100 |
| 112 | M112 | Z | -.386 | -.386 | 0 %100 |
| 113 | M115 | X | -2.677 | -2.677 | 0 %100 |
| 114 | M115 | Z | -1.546 | -1.546 | 0 %100 |

Member Distributed Loads (BLC 64 : Structure Wi (330 Deg))

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k. | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | -1.598 | -1.598 | 0 %100 |
| 2 | M1 | Z | -2.769 | -2.769 | 0 %100 |
| 3 | M4 | X | -.568 | -.568 | 0 %100 |
| 4 | M4 | Z | -.984 | -.984 | 0 %100 |
| 5 | M10 | X | -1.385 | -1.385 | 0 %100 |
| 6 | M10 | Z | -2.399 | -2.399 | 0 %100 |
| 7 | MP3A | X | -1.719 | -1.719 | 0 %100 |
| 8 | MP3A | Z | -2.978 | -2.978 | 0 %100 |
| 9 | MP4A | X | -1.719 | -1.719 | 0 %100 |
| 10 | MP4A | Z | -2.978 | -2.978 | 0 %100 |
| 11 | MP2A | X | -1.719 | -1.719 | 0 %100 |
| 12 | MP2A | Z | -2.978 | -2.978 | 0 %100 |
| 13 | MP1A | X | -1.719 | -1.719 | 0 %100 |
| 14 | MP1A | Z | -2.978 | -2.978 | 0 %100 |
| 15 | M43 | X | -1.385 | -1.385 | 0 %100 |
| 16 | M43 | Z | -2.399 | -2.399 | 0 %100 |
| 17 | M46 | X | -2.053 | -2.053 | 0 %100 |
| 18 | M46 | Z | -3.556 | -3.556 | 0 %100 |
| 19 | M51B | X | 0 | 0 | 0 %100 |
| 20 | M51B | Z | 0 | 0 | 0 %100 |
| 21 | M52B | X | -1.511 | -1.511 | 0 %100 |
| 22 | M52B | Z | -2.617 | -2.617 | 0 %100 |
| 23 | M76 | X | -.673 | -.673 | 0 %100 |
| 24 | M76 | Z | -1.166 | -1.166 | 0 %100 |
| 25 | M77 | X | 0 | 0 | 0 %100 |
| 26 | M77 | Z | 0 | 0 | 0 %100 |
| 27 | M80 | X | 0 | 0 | 0 %100 |
| 28 | M80 | Z | 0 | 0 | 0 %100 |
| 29 | M84 | X | -.673 | -.673 | 0 %100 |
| 30 | M84 | Z | -1.166 | -1.166 | 0 %100 |
| 31 | M85 | X | -2.05 | -2.05 | 0 %100 |
| 32 | M85 | Z | -3.551 | -3.551 | 0 %100 |
| 33 | M91 | X | -2.139 | -2.139 | 0 %100 |
| 34 | M91 | Z | -3.705 | -3.705 | 0 %100 |
| 35 | M34 | X | 0 | 0 | 0 %100 |
| 36 | M34 | Z | 0 | 0 | 0 %100 |
| 37 | M43A | X | -1.598 | -1.598 | 0 %100 |
| 38 | M43A | Z | -2.769 | -2.769 | 0 %100 |
| 39 | M52A | X | -2.273 | -2.273 | 0 %100 |
| 40 | M52A | Z | -3.937 | -3.937 | 0 %100 |
| 41 | M53 | X | 0 | 0 | 0 %100 |
| 42 | M53 | Z | 0 | 0 | 0 %100 |
| 43 | M54 | X | 0 | 0 | 0 %100 |
| 44 | M54 | Z | 0 | 0 | 0 %100 |
| 45 | M55 | X | 0 | 0 | 0 %100 |
| 46 | M55 | Z | 0 | 0 | 0 %100 |
| 47 | M58A | X | -1.511 | -1.511 | 0 %100 |
| 48 | M58A | Z | -2.617 | -2.617 | 0 %100 |
| 49 | M59A | X | -1.511 | -1.511 | 0 %100 |
| 50 | M59A | Z | -2.617 | -2.617 | 0 %100 |
| 51 | M63 | X | -2.693 | -2.693 | 0 %100 |
| 52 | M63 | Z | -4.664 | -4.664 | 0 %100 |
| 53 | M64 | X | -2.05 | -2.05 | 0 %100 |
| 54 | M64 | Z | -3.551 | -3.551 | 0 %100 |
| 55 | M66 | X | -2.139 | -2.139 | 0 %100 |
| 56 | M66 | Z | -3.705 | -3.705 | 0 %100 |
| 57 | M68 | X | -2.693 | -2.693 | 0 %100 |

Member Distributed Loads (BLC 64 : Structure Wi (330 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 58 | M68 | Z | -4.664 | -4.664 | 0 %100 |
| 59 | M69 | X | -2.05 | -2.05 | 0 %100 |
| 60 | M69 | Z | -3.551 | -3.551 | 0 %100 |
| 61 | M71 | X | -2.139 | -2.139 | 0 %100 |
| 62 | M71 | Z | -3.705 | -3.705 | 0 %100 |
| 63 | M76A | X | -.568 | -.568 | 0 %100 |
| 64 | M76A | Z | -.984 | -.984 | 0 %100 |
| 65 | M77A | X | -1.385 | -1.385 | 0 %100 |
| 66 | M77A | Z | -2.399 | -2.399 | 0 %100 |
| 67 | M78 | X | -1.385 | -1.385 | 0 %100 |
| 68 | M78 | Z | -2.399 | -2.399 | 0 %100 |
| 69 | M79A | X | -2.053 | -2.053 | 0 %100 |
| 70 | M79A | Z | -3.556 | -3.556 | 0 %100 |
| 71 | M82 | X | -1.511 | -1.511 | 0 %100 |
| 72 | M82 | Z | -2.617 | -2.617 | 0 %100 |
| 73 | M83A | X | 0 | 0 | 0 %100 |
| 74 | M83A | Z | 0 | 0 | 0 %100 |
| 75 | M87 | X | -.673 | -.673 | 0 %100 |
| 76 | M87 | Z | -1.166 | -1.166 | 0 %100 |
| 77 | M88A | X | -2.05 | -2.05 | 0 %100 |
| 78 | M88A | Z | -3.551 | -3.551 | 0 %100 |
| 79 | M90 | X | -2.139 | -2.139 | 0 %100 |
| 80 | M90 | Z | -3.705 | -3.705 | 0 %100 |
| 81 | M92A | X | -.673 | -.673 | 0 %100 |
| 82 | M92A | Z | -1.166 | -1.166 | 0 %100 |
| 83 | M93 | X | 0 | 0 | 0 %100 |
| 84 | M93 | Z | 0 | 0 | 0 %100 |
| 85 | M95 | X | 0 | 0 | 0 %100 |
| 86 | M95 | Z | 0 | 0 | 0 %100 |
| 87 | M84B | X | -1.29 | -1.29 | 0 %100 |
| 88 | M84B | Z | -2.234 | -2.234 | 0 %100 |
| 89 | M89A | X | 0 | 0 | 0 %100 |
| 90 | M89A | Z | 0 | 0 | 0 %100 |
| 91 | M94A | X | -1.29 | -1.29 | 0 %100 |
| 92 | M94A | Z | -2.234 | -2.234 | 0 %100 |
| 93 | MP3C | X | -1.719 | -1.719 | 0 %100 |
| 94 | MP3C | Z | -2.978 | -2.978 | 0 %100 |
| 95 | MP4C | X | -1.719 | -1.719 | 0 %100 |
| 96 | MP4C | Z | -2.978 | -2.978 | 0 %100 |
| 97 | MP2C | X | -1.719 | -1.719 | 0 %100 |
| 98 | MP2C | Z | -2.978 | -2.978 | 0 %100 |
| 99 | MP1C | X | -1.719 | -1.719 | 0 %100 |
| 100 | MP1C | Z | -2.978 | -2.978 | 0 %100 |
| 101 | MP3B | X | -1.719 | -1.719 | 0 %100 |
| 102 | MP3B | Z | -2.978 | -2.978 | 0 %100 |
| 103 | MP4B | X | -1.719 | -1.719 | 0 %100 |
| 104 | MP4B | Z | -2.978 | -2.978 | 0 %100 |
| 105 | MP2B | X | -1.719 | -1.719 | 0 %100 |
| 106 | MP2B | Z | -2.978 | -2.978 | 0 %100 |
| 107 | MP1B | X | -1.719 | -1.719 | 0 %100 |
| 108 | MP1B | Z | -2.978 | -2.978 | 0 %100 |
| 109 | M109 | X | -1.159 | -1.159 | 0 %100 |
| 110 | M109 | Z | -2.008 | -2.008 | 0 %100 |
| 111 | M112 | X | 0 | 0 | 0 %100 |
| 112 | M112 | Z | 0 | 0 | 0 %100 |
| 113 | M115 | X | -1.159 | -1.159 | 0 %100 |
| 114 | M115 | Z | -2.008 | -2.008 | 0 %100 |

Member Distributed Loads (BLC 65 : Structure Wm (0 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft,F,ksf] | End Magnitude[lb/ft,F,k] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | 0 | 0 | 0 | %100 |
| 2 | M1 | Z | -912 | -912 | 0 | %100 |
| 3 | M4 | X | 0 | 0 | 0 | %100 |
| 4 | M4 | Z | 0 | 0 | 0 | %100 |
| 5 | M10 | X | 0 | 0 | 0 | %100 |
| 6 | M10 | Z | -862 | -862 | 0 | %100 |
| 7 | MP3A | X | 0 | 0 | 0 | %100 |
| 8 | MP3A | Z | -626 | -626 | 0 | %100 |
| 9 | MP4A | X | 0 | 0 | 0 | %100 |
| 10 | MP4A | Z | -626 | -626 | 0 | %100 |
| 11 | MP2A | X | 0 | 0 | 0 | %100 |
| 12 | MP2A | Z | -626 | -626 | 0 | %100 |
| 13 | MP1A | X | 0 | 0 | 0 | %100 |
| 14 | MP1A | Z | -626 | -626 | 0 | %100 |
| 15 | M43 | X | 0 | 0 | 0 | %100 |
| 16 | M43 | Z | -862 | -862 | 0 | %100 |
| 17 | M46 | X | 0 | 0 | 0 | %100 |
| 18 | M46 | Z | -1.582 | -1.582 | 0 | %100 |
| 19 | M51B | X | 0 | 0 | 0 | %100 |
| 20 | M51B | Z | -22 | -22 | 0 | %100 |
| 21 | M52B | X | 0 | 0 | 0 | %100 |
| 22 | M52B | Z | -22 | -22 | 0 | %100 |
| 23 | M76 | X | 0 | 0 | 0 | %100 |
| 24 | M76 | Z | 0 | 0 | 0 | %100 |
| 25 | M77 | X | 0 | 0 | 0 | %100 |
| 26 | M77 | Z | -403 | -403 | 0 | %100 |
| 27 | M80 | X | 0 | 0 | 0 | %100 |
| 28 | M80 | Z | -424 | -424 | 0 | %100 |
| 29 | M84 | X | 0 | 0 | 0 | %100 |
| 30 | M84 | Z | 0 | 0 | 0 | %100 |
| 31 | M85 | X | 0 | 0 | 0 | %100 |
| 32 | M85 | Z | -403 | -403 | 0 | %100 |
| 33 | M91 | X | 0 | 0 | 0 | %100 |
| 34 | M91 | Z | -424 | -424 | 0 | %100 |
| 35 | M34 | X | 0 | 0 | 0 | %100 |
| 36 | M34 | Z | -228 | -228 | 0 | %100 |
| 37 | M43A | X | 0 | 0 | 0 | %100 |
| 38 | M43A | Z | -228 | -228 | 0 | %100 |
| 39 | M52A | X | 0 | 0 | 0 | %100 |
| 40 | M52A | Z | -768 | -768 | 0 | %100 |
| 41 | M53 | X | 0 | 0 | 0 | %100 |
| 42 | M53 | Z | -215 | -215 | 0 | %100 |
| 43 | M54 | X | 0 | 0 | 0 | %100 |
| 44 | M54 | Z | -215 | -215 | 0 | %100 |
| 45 | M55 | X | 0 | 0 | 0 | %100 |
| 46 | M55 | Z | -395 | -395 | 0 | %100 |
| 47 | M58A | X | 0 | 0 | 0 | %100 |
| 48 | M58A | Z | -22 | -22 | 0 | %100 |
| 49 | M59A | X | 0 | 0 | 0 | %100 |
| 50 | M59A | Z | -878 | -878 | 0 | %100 |
| 51 | M63 | X | 0 | 0 | 0 | %100 |
| 52 | M63 | Z | -1.186 | -1.186 | 0 | %100 |
| 53 | M64 | X | 0 | 0 | 0 | %100 |
| 54 | M64 | Z | -403 | -403 | 0 | %100 |
| 55 | M66 | X | 0 | 0 | 0 | %100 |
| 56 | M66 | Z | -424 | -424 | 0 | %100 |
| 57 | M68 | X | 0 | 0 | 0 | %100 |

Member Distributed Loads (BLC 65 : Structure Wm (0 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | -1.186 | -1.186 | 0 %100 |
| 59 | M69 | X | 0 | 0 | 0 %100 |
| 60 | M69 | Z | -1.611 | -1.611 | 0 %100 |
| 61 | M71 | X | 0 | 0 | 0 %100 |
| 62 | M71 | Z | -1.697 | -1.697 | 0 %100 |
| 63 | M76A | X | 0 | 0 | 0 %100 |
| 64 | M76A | Z | -0.768 | -0.768 | 0 %100 |
| 65 | M77A | X | 0 | 0 | 0 %100 |
| 66 | M77A | Z | -0.215 | -0.215 | 0 %100 |
| 67 | M78 | X | 0 | 0 | 0 %100 |
| 68 | M78 | Z | -0.215 | -0.215 | 0 %100 |
| 69 | M79A | X | 0 | 0 | 0 %100 |
| 70 | M79A | Z | -0.395 | -0.395 | 0 %100 |
| 71 | M82 | X | 0 | 0 | 0 %100 |
| 72 | M82 | Z | -0.878 | -0.878 | 0 %100 |
| 73 | M83A | X | 0 | 0 | 0 %100 |
| 74 | M83A | Z | -0.22 | -0.22 | 0 %100 |
| 75 | M87 | X | 0 | 0 | 0 %100 |
| 76 | M87 | Z | -1.186 | -1.186 | 0 %100 |
| 77 | M88A | X | 0 | 0 | 0 %100 |
| 78 | M88A | Z | -1.611 | -1.611 | 0 %100 |
| 79 | M90 | X | 0 | 0 | 0 %100 |
| 80 | M90 | Z | -1.697 | -1.697 | 0 %100 |
| 81 | M92A | X | 0 | 0 | 0 %100 |
| 82 | M92A | Z | -1.186 | -1.186 | 0 %100 |
| 83 | M93 | X | 0 | 0 | 0 %100 |
| 84 | M93 | Z | -0.403 | -0.403 | 0 %100 |
| 85 | M95 | X | 0 | 0 | 0 %100 |
| 86 | M95 | Z | -0.424 | -0.424 | 0 %100 |
| 87 | M84B | X | 0 | 0 | 0 %100 |
| 88 | M84B | Z | -0.626 | -0.626 | 0 %100 |
| 89 | M89A | X | 0 | 0 | 0 %100 |
| 90 | M89A | Z | -0.157 | -0.157 | 0 %100 |
| 91 | M94A | X | 0 | 0 | 0 %100 |
| 92 | M94A | Z | -0.157 | -0.157 | 0 %100 |
| 93 | MP3C | X | 0 | 0 | 0 %100 |
| 94 | MP3C | Z | -0.626 | -0.626 | 0 %100 |
| 95 | MP4C | X | 0 | 0 | 0 %100 |
| 96 | MP4C | Z | -0.626 | -0.626 | 0 %100 |
| 97 | MP2C | X | 0 | 0 | 0 %100 |
| 98 | MP2C | Z | -0.626 | -0.626 | 0 %100 |
| 99 | MP1C | X | 0 | 0 | 0 %100 |
| 100 | MP1C | Z | -0.626 | -0.626 | 0 %100 |
| 101 | MP3B | X | 0 | 0 | 0 %100 |
| 102 | MP3B | Z | -0.626 | -0.626 | 0 %100 |
| 103 | MP4B | X | 0 | 0 | 0 %100 |
| 104 | MP4B | Z | -0.626 | -0.626 | 0 %100 |
| 105 | MP2B | X | 0 | 0 | 0 %100 |
| 106 | MP2B | Z | -0.626 | -0.626 | 0 %100 |
| 107 | MP1B | X | 0 | 0 | 0 %100 |
| 108 | MP1B | Z | -0.626 | -0.626 | 0 %100 |
| 109 | M109 | X | 0 | 0 | 0 %100 |
| 110 | M109 | Z | -0.722 | -0.722 | 0 %100 |
| 111 | M112 | X | 0 | 0 | 0 %100 |
| 112 | M112 | Z | -0.181 | -0.181 | 0 %100 |
| 113 | M115 | X | 0 | 0 | 0 %100 |
| 114 | M115 | Z | -0.181 | -0.181 | 0 %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 66 : Structure Wm (30 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | .342 | .342 | 0 | %100 |
| 2 | M1 | Z | -.592 | -.592 | 0 | %100 |
| 3 | M4 | X | .128 | .128 | 0 | %100 |
| 4 | M4 | Z | -.222 | -.222 | 0 | %100 |
| 5 | M10 | X | .323 | .323 | 0 | %100 |
| 6 | M10 | Z | -.56 | -.56 | 0 | %100 |
| 7 | MP3A | X | .313 | .313 | 0 | %100 |
| 8 | MP3A | Z | -.542 | -.542 | 0 | %100 |
| 9 | MP4A | X | .313 | .313 | 0 | %100 |
| 10 | MP4A | Z | -.542 | -.542 | 0 | %100 |
| 11 | MP2A | X | .313 | .313 | 0 | %100 |
| 12 | MP2A | Z | -.542 | -.542 | 0 | %100 |
| 13 | MP1A | X | .313 | .313 | 0 | %100 |
| 14 | MP1A | Z | -.542 | -.542 | 0 | %100 |
| 15 | M43 | X | .323 | .323 | 0 | %100 |
| 16 | M43 | Z | -.56 | -.56 | 0 | %100 |
| 17 | M46 | X | .593 | .593 | 0 | %100 |
| 18 | M46 | Z | -1.027 | -1.027 | 0 | %100 |
| 19 | M51B | X | .329 | .329 | 0 | %100 |
| 20 | M51B | Z | -.57 | -.57 | 0 | %100 |
| 21 | M52B | X | 0 | 0 | 0 | %100 |
| 22 | M52B | Z | 0 | 0 | 0 | %100 |
| 23 | M76 | X | .198 | .198 | 0 | %100 |
| 24 | M76 | Z | -.342 | -.342 | 0 | %100 |
| 25 | M77 | X | .604 | .604 | 0 | %100 |
| 26 | M77 | Z | -1.046 | -1.046 | 0 | %100 |
| 27 | M80 | X | .636 | .636 | 0 | %100 |
| 28 | M80 | Z | -1.102 | -1.102 | 0 | %100 |
| 29 | M84 | X | .198 | .198 | 0 | %100 |
| 30 | M84 | Z | -.342 | -.342 | 0 | %100 |
| 31 | M85 | X | 0 | 0 | 0 | %100 |
| 32 | M85 | Z | 0 | 0 | 0 | %100 |
| 33 | M91 | X | 0 | 0 | 0 | %100 |
| 34 | M91 | Z | 0 | 0 | 0 | %100 |
| 35 | M34 | X | .342 | .342 | 0 | %100 |
| 36 | M34 | Z | -.592 | -.592 | 0 | %100 |
| 37 | M43A | X | 0 | 0 | 0 | %100 |
| 38 | M43A | Z | 0 | 0 | 0 | %100 |
| 39 | M52A | X | .128 | .128 | 0 | %100 |
| 40 | M52A | Z | -.222 | -.222 | 0 | %100 |
| 41 | M53 | X | .323 | .323 | 0 | %100 |
| 42 | M53 | Z | -.56 | -.56 | 0 | %100 |
| 43 | M54 | X | .323 | .323 | 0 | %100 |
| 44 | M54 | Z | -.56 | -.56 | 0 | %100 |
| 45 | M55 | X | .593 | .593 | 0 | %100 |
| 46 | M55 | Z | -1.027 | -1.027 | 0 | %100 |
| 47 | M58A | X | 0 | 0 | 0 | %100 |
| 48 | M58A | Z | 0 | 0 | 0 | %100 |
| 49 | M59A | X | .329 | .329 | 0 | %100 |
| 50 | M59A | Z | -.57 | -.57 | 0 | %100 |
| 51 | M63 | X | .198 | .198 | 0 | %100 |
| 52 | M63 | Z | -.342 | -.342 | 0 | %100 |
| 53 | M64 | X | 0 | 0 | 0 | %100 |
| 54 | M64 | Z | 0 | 0 | 0 | %100 |
| 55 | M66 | X | 0 | 0 | 0 | %100 |
| 56 | M66 | Z | 0 | 0 | 0 | %100 |
| 57 | M68 | X | .198 | .198 | 0 | %100 |

Member Distributed Loads (BLC 66 : Structure Wm (30 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 58 | M68 | Z | -.342 | -.342 | 0 %100 |
| 59 | M69 | X | .604 | .604 | 0 %100 |
| 60 | M69 | Z | -1.046 | -1.046 | 0 %100 |
| 61 | M71 | X | .636 | .636 | 0 %100 |
| 62 | M71 | Z | -1.102 | -1.102 | 0 %100 |
| 63 | M76A | X | .512 | .512 | 0 %100 |
| 64 | M76A | Z | -.887 | -.887 | 0 %100 |
| 65 | M77A | X | 0 | 0 | 0 %100 |
| 66 | M77A | Z | 0 | 0 | 0 %100 |
| 67 | M78 | X | 0 | 0 | 0 %100 |
| 68 | M78 | Z | 0 | 0 | 0 %100 |
| 69 | M79A | X | 0 | 0 | 0 %100 |
| 70 | M79A | Z | 0 | 0 | 0 %100 |
| 71 | M82 | X | .329 | .329 | 0 %100 |
| 72 | M82 | Z | -.57 | -.57 | 0 %100 |
| 73 | M83A | X | .329 | .329 | 0 %100 |
| 74 | M83A | Z | -.57 | -.57 | 0 %100 |
| 75 | M87 | X | .791 | .791 | 0 %100 |
| 76 | M87 | Z | -1.37 | -1.37 | 0 %100 |
| 77 | M88A | X | .604 | .604 | 0 %100 |
| 78 | M88A | Z | -1.046 | -1.046 | 0 %100 |
| 79 | M90 | X | .636 | .636 | 0 %100 |
| 80 | M90 | Z | -1.102 | -1.102 | 0 %100 |
| 81 | M92A | X | .791 | .791 | 0 %100 |
| 82 | M92A | Z | -1.37 | -1.37 | 0 %100 |
| 83 | M93 | X | .604 | .604 | 0 %100 |
| 84 | M93 | Z | -1.046 | -1.046 | 0 %100 |
| 85 | M95 | X | .636 | .636 | 0 %100 |
| 86 | M95 | Z | -1.102 | -1.102 | 0 %100 |
| 87 | M84B | X | .235 | .235 | 0 %100 |
| 88 | M84B | Z | -.407 | -.407 | 0 %100 |
| 89 | M89A | X | .235 | .235 | 0 %100 |
| 90 | M89A | Z | -.407 | -.407 | 0 %100 |
| 91 | M94A | X | 0 | 0 | 0 %100 |
| 92 | M94A | Z | 0 | 0 | 0 %100 |
| 93 | MP3C | X | .313 | .313 | 0 %100 |
| 94 | MP3C | Z | -.542 | -.542 | 0 %100 |
| 95 | MP4C | X | .313 | .313 | 0 %100 |
| 96 | MP4C | Z | -.542 | -.542 | 0 %100 |
| 97 | MP2C | X | .313 | .313 | 0 %100 |
| 98 | MP2C | Z | -.542 | -.542 | 0 %100 |
| 99 | MP1C | X | .313 | .313 | 0 %100 |
| 100 | MP1C | Z | -.542 | -.542 | 0 %100 |
| 101 | MP3B | X | .313 | .313 | 0 %100 |
| 102 | MP3B | Z | -.542 | -.542 | 0 %100 |
| 103 | MP4B | X | .313 | .313 | 0 %100 |
| 104 | MP4B | Z | -.542 | -.542 | 0 %100 |
| 105 | MP2B | X | .313 | .313 | 0 %100 |
| 106 | MP2B | Z | -.542 | -.542 | 0 %100 |
| 107 | MP1B | X | .313 | .313 | 0 %100 |
| 108 | MP1B | Z | -.542 | -.542 | 0 %100 |
| 109 | M109 | X | .271 | .271 | 0 %100 |
| 110 | M109 | Z | -.469 | -.469 | 0 %100 |
| 111 | M112 | X | .271 | .271 | 0 %100 |
| 112 | M112 | Z | -.469 | -.469 | 0 %100 |
| 113 | M115 | X | 0 | 0 | 0 %100 |
| 114 | M115 | Z | 0 | 0 | 0 %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 67 : Structure Wm (60 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k.] | Start Location[ft.%] | End Location[ft.%] |
|----|--------------|-----------|------------------------------|---------------------------|----------------------|--------------------|
| 1 | M1 | X | .197 | .197 | 0 | %100 |
| 2 | M1 | Z | -.114 | -.114 | 0 | %100 |
| 3 | M4 | X | .665 | .665 | 0 | %100 |
| 4 | M4 | Z | -.384 | -.384 | 0 | %100 |
| 5 | M10 | X | .187 | .187 | 0 | %100 |
| 6 | M10 | Z | -.108 | -.108 | 0 | %100 |
| 7 | MP3A | X | .542 | .542 | 0 | %100 |
| 8 | MP3A | Z | -.313 | -.313 | 0 | %100 |
| 9 | MP4A | X | .542 | .542 | 0 | %100 |
| 10 | MP4A | Z | -.313 | -.313 | 0 | %100 |
| 11 | MP2A | X | .542 | .542 | 0 | %100 |
| 12 | MP2A | Z | -.313 | -.313 | 0 | %100 |
| 13 | MP1A | X | .542 | .542 | 0 | %100 |
| 14 | MP1A | Z | -.313 | -.313 | 0 | %100 |
| 15 | M43 | X | .187 | .187 | 0 | %100 |
| 16 | M43 | Z | -.108 | -.108 | 0 | %100 |
| 17 | M46 | X | .342 | .342 | 0 | %100 |
| 18 | M46 | Z | -.198 | -.198 | 0 | %100 |
| 19 | M51B | X | .761 | .761 | 0 | %100 |
| 20 | M51B | Z | -.439 | -.439 | 0 | %100 |
| 21 | M52B | X | .19 | .19 | 0 | %100 |
| 22 | M52B | Z | -.11 | -.11 | 0 | %100 |
| 23 | M76 | X | 1.027 | 1.027 | 0 | %100 |
| 24 | M76 | Z | -.593 | -.593 | 0 | %100 |
| 25 | M77 | X | 1.395 | 1.395 | 0 | %100 |
| 26 | M77 | Z | -.806 | -.806 | 0 | %100 |
| 27 | M80 | X | 1.47 | 1.47 | 0 | %100 |
| 28 | M80 | Z | -.848 | -.848 | 0 | %100 |
| 29 | M84 | X | 1.027 | 1.027 | 0 | %100 |
| 30 | M84 | Z | -.593 | -.593 | 0 | %100 |
| 31 | M85 | X | .349 | .349 | 0 | %100 |
| 32 | M85 | Z | -.201 | -.201 | 0 | %100 |
| 33 | M91 | X | .367 | .367 | 0 | %100 |
| 34 | M91 | Z | -.212 | -.212 | 0 | %100 |
| 35 | M34 | X | .789 | .789 | 0 | %100 |
| 36 | M34 | Z | -.456 | -.456 | 0 | %100 |
| 37 | M43A | X | .197 | .197 | 0 | %100 |
| 38 | M43A | Z | -.114 | -.114 | 0 | %100 |
| 39 | M52A | X | 0 | 0 | 0 | %100 |
| 40 | M52A | Z | 0 | 0 | 0 | %100 |
| 41 | M53 | X | .746 | .746 | 0 | %100 |
| 42 | M53 | Z | -.431 | -.431 | 0 | %100 |
| 43 | M54 | X | .746 | .746 | 0 | %100 |
| 44 | M54 | Z | -.431 | -.431 | 0 | %100 |
| 45 | M55 | X | 1.37 | 1.37 | 0 | %100 |
| 46 | M55 | Z | -.791 | -.791 | 0 | %100 |
| 47 | M58A | X | .19 | .19 | 0 | %100 |
| 48 | M58A | Z | -.11 | -.11 | 0 | %100 |
| 49 | M59A | X | .19 | .19 | 0 | %100 |
| 50 | M59A | Z | -.11 | -.11 | 0 | %100 |
| 51 | M63 | X | 0 | 0 | 0 | %100 |
| 52 | M63 | Z | 0 | 0 | 0 | %100 |
| 53 | M64 | X | .349 | .349 | 0 | %100 |
| 54 | M64 | Z | -.201 | -.201 | 0 | %100 |
| 55 | M66 | X | .367 | .367 | 0 | %100 |
| 56 | M66 | Z | -.212 | -.212 | 0 | %100 |
| 57 | M68 | X | 0 | 0 | 0 | %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 67 : Structure Wm (60 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 58 | M68 | Z | 0 | 0 | %100 |
| 59 | M69 | X | .349 | .349 | %100 |
| 60 | M69 | Z | -.201 | -.201 | %100 |
| 61 | M71 | X | .367 | .367 | %100 |
| 62 | M71 | Z | -.212 | -.212 | %100 |
| 63 | M76A | X | .665 | .665 | %100 |
| 64 | M76A | Z | -.384 | -.384 | %100 |
| 65 | M77A | X | .187 | .187 | %100 |
| 66 | M77A | Z | -.108 | -.108 | %100 |
| 67 | M78 | X | .187 | .187 | %100 |
| 68 | M78 | Z | -.108 | -.108 | %100 |
| 69 | M79A | X | .342 | .342 | %100 |
| 70 | M79A | Z | -.198 | -.198 | %100 |
| 71 | M82 | X | .19 | .19 | %100 |
| 72 | M82 | Z | -.11 | -.11 | %100 |
| 73 | M83A | X | .761 | .761 | %100 |
| 74 | M83A | Z | -.439 | -.439 | %100 |
| 75 | M87 | X | 1.027 | 1.027 | %100 |
| 76 | M87 | Z | -.593 | -.593 | %100 |
| 77 | M88A | X | .349 | .349 | %100 |
| 78 | M88A | Z | -.201 | -.201 | %100 |
| 79 | M90 | X | .367 | .367 | %100 |
| 80 | M90 | Z | -.212 | -.212 | %100 |
| 81 | M92A | X | 1.027 | 1.027 | %100 |
| 82 | M92A | Z | -.593 | -.593 | %100 |
| 83 | M93 | X | 1.395 | 1.395 | %100 |
| 84 | M93 | Z | -.806 | -.806 | %100 |
| 85 | M95 | X | 1.47 | 1.47 | %100 |
| 86 | M95 | Z | -.848 | -.848 | %100 |
| 87 | M84B | X | .136 | .136 | %100 |
| 88 | M84B | Z | -.078 | -.078 | %100 |
| 89 | M89A | X | .542 | .542 | %100 |
| 90 | M89A | Z | -.313 | -.313 | %100 |
| 91 | M94A | X | .136 | .136 | %100 |
| 92 | M94A | Z | -.078 | -.078 | %100 |
| 93 | MP3C | X | .542 | .542 | %100 |
| 94 | MP3C | Z | -.313 | -.313 | %100 |
| 95 | MP4C | X | .542 | .542 | %100 |
| 96 | MP4C | Z | -.313 | -.313 | %100 |
| 97 | MP2C | X | .542 | .542 | %100 |
| 98 | MP2C | Z | -.313 | -.313 | %100 |
| 99 | MP1C | X | .542 | .542 | %100 |
| 100 | MP1C | Z | -.313 | -.313 | %100 |
| 101 | MP3B | X | .542 | .542 | %100 |
| 102 | MP3B | Z | -.313 | -.313 | %100 |
| 103 | MP4B | X | .542 | .542 | %100 |
| 104 | MP4B | Z | -.313 | -.313 | %100 |
| 105 | MP2B | X | .542 | .542 | %100 |
| 106 | MP2B | Z | -.313 | -.313 | %100 |
| 107 | MP1B | X | .542 | .542 | %100 |
| 108 | MP1B | Z | -.313 | -.313 | %100 |
| 109 | M109 | X | .156 | .156 | %100 |
| 110 | M109 | Z | -.09 | -.09 | %100 |
| 111 | M112 | X | .625 | .625 | %100 |
| 112 | M112 | Z | -.361 | -.361 | %100 |
| 113 | M115 | X | .156 | .156 | %100 |
| 114 | M115 | Z | -.09 | -.09 | %100 |

Member Distributed Loads (BLC 68 : Structure Wm (90 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] |
|----|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 1 | M1 | X | 0 | 0 | 0 | %100 |
| 2 | M1 | Z | 0 | 0 | 0 | %100 |
| 3 | M4 | X | 1.025 | 1.025 | 0 | %100 |
| 4 | M4 | Z | 0 | 0 | 0 | %100 |
| 5 | M10 | X | 0 | 0 | 0 | %100 |
| 6 | M10 | Z | 0 | 0 | 0 | %100 |
| 7 | MP3A | X | .626 | .626 | 0 | %100 |
| 8 | MP3A | Z | 0 | 0 | 0 | %100 |
| 9 | MP4A | X | .626 | .626 | 0 | %100 |
| 10 | MP4A | Z | 0 | 0 | 0 | %100 |
| 11 | MP2A | X | .626 | .626 | 0 | %100 |
| 12 | MP2A | Z | 0 | 0 | 0 | %100 |
| 13 | MP1A | X | .626 | .626 | 0 | %100 |
| 14 | MP1A | Z | 0 | 0 | 0 | %100 |
| 15 | M43 | X | 0 | 0 | 0 | %100 |
| 16 | M43 | Z | 0 | 0 | 0 | %100 |
| 17 | M46 | X | 0 | 0 | 0 | %100 |
| 18 | M46 | Z | 0 | 0 | 0 | %100 |
| 19 | M51B | X | .659 | .659 | 0 | %100 |
| 20 | M51B | Z | 0 | 0 | 0 | %100 |
| 21 | M52B | X | .659 | .659 | 0 | %100 |
| 22 | M52B | Z | 0 | 0 | 0 | %100 |
| 23 | M76 | X | 1.582 | 1.582 | 0 | %100 |
| 24 | M76 | Z | 0 | 0 | 0 | %100 |
| 25 | M77 | X | 1.208 | 1.208 | 0 | %100 |
| 26 | M77 | Z | 0 | 0 | 0 | %100 |
| 27 | M80 | X | 1.273 | 1.273 | 0 | %100 |
| 28 | M80 | Z | 0 | 0 | 0 | %100 |
| 29 | M84 | X | 1.582 | 1.582 | 0 | %100 |
| 30 | M84 | Z | 0 | 0 | 0 | %100 |
| 31 | M85 | X | 1.208 | 1.208 | 0 | %100 |
| 32 | M85 | Z | 0 | 0 | 0 | %100 |
| 33 | M91 | X | 1.273 | 1.273 | 0 | %100 |
| 34 | M91 | Z | 0 | 0 | 0 | %100 |
| 35 | M34 | X | .684 | .684 | 0 | %100 |
| 36 | M34 | Z | 0 | 0 | 0 | %100 |
| 37 | M43A | X | .684 | .684 | 0 | %100 |
| 38 | M43A | Z | 0 | 0 | 0 | %100 |
| 39 | M52A | X | .256 | .256 | 0 | %100 |
| 40 | M52A | Z | 0 | 0 | 0 | %100 |
| 41 | M53 | X | .646 | .646 | 0 | %100 |
| 42 | M53 | Z | 0 | 0 | 0 | %100 |
| 43 | M54 | X | .646 | .646 | 0 | %100 |
| 44 | M54 | Z | 0 | 0 | 0 | %100 |
| 45 | M55 | X | 1.186 | 1.186 | 0 | %100 |
| 46 | M55 | Z | 0 | 0 | 0 | %100 |
| 47 | M58A | X | .659 | .659 | 0 | %100 |
| 48 | M58A | Z | 0 | 0 | 0 | %100 |
| 49 | M59A | X | 0 | 0 | 0 | %100 |
| 50 | M59A | Z | 0 | 0 | 0 | %100 |
| 51 | M63 | X | .395 | .395 | 0 | %100 |
| 52 | M63 | Z | 0 | 0 | 0 | %100 |
| 53 | M64 | X | 1.208 | 1.208 | 0 | %100 |
| 54 | M64 | Z | 0 | 0 | 0 | %100 |
| 55 | M66 | X | 1.273 | 1.273 | 0 | %100 |
| 56 | M66 | Z | 0 | 0 | 0 | %100 |
| 57 | M68 | X | .395 | .395 | 0 | %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 68 : Structure Wm (90 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | 0 | 0 | %100 |
| 59 | M69 | X | 0 | 0 | %100 |
| 60 | M69 | Z | 0 | 0 | %100 |
| 61 | M71 | X | 0 | 0 | %100 |
| 62 | M71 | Z | 0 | 0 | %100 |
| 63 | M76A | X | .256 | .256 | %100 |
| 64 | M76A | Z | 0 | 0 | %100 |
| 65 | M77A | X | .646 | .646 | %100 |
| 66 | M77A | Z | 0 | 0 | %100 |
| 67 | M78 | X | .646 | .646 | %100 |
| 68 | M78 | Z | 0 | 0 | %100 |
| 69 | M79A | X | 1.186 | 1.186 | %100 |
| 70 | M79A | Z | 0 | 0 | %100 |
| 71 | M82 | X | 0 | 0 | %100 |
| 72 | M82 | Z | 0 | 0 | %100 |
| 73 | M83A | X | .659 | .659 | %100 |
| 74 | M83A | Z | 0 | 0 | %100 |
| 75 | M87 | X | .395 | .395 | %100 |
| 76 | M87 | Z | 0 | 0 | %100 |
| 77 | M88A | X | 0 | 0 | %100 |
| 78 | M88A | Z | 0 | 0 | %100 |
| 79 | M90 | X | 0 | 0 | %100 |
| 80 | M90 | Z | 0 | 0 | %100 |
| 81 | M92A | X | .395 | .395 | %100 |
| 82 | M92A | Z | 0 | 0 | %100 |
| 83 | M93 | X | 1.208 | 1.208 | %100 |
| 84 | M93 | Z | 0 | 0 | %100 |
| 85 | M95 | X | 1.273 | 1.273 | %100 |
| 86 | M95 | Z | 0 | 0 | %100 |
| 87 | M84B | X | 0 | 0 | %100 |
| 88 | M84B | Z | 0 | 0 | %100 |
| 89 | M89A | X | .47 | .47 | %100 |
| 90 | M89A | Z | 0 | 0 | %100 |
| 91 | M94A | X | .47 | .47 | %100 |
| 92 | M94A | Z | 0 | 0 | %100 |
| 93 | MP3C | X | .626 | .626 | %100 |
| 94 | MP3C | Z | 0 | 0 | %100 |
| 95 | MP4C | X | .626 | .626 | %100 |
| 96 | MP4C | Z | 0 | 0 | %100 |
| 97 | MP2C | X | .626 | .626 | %100 |
| 98 | MP2C | Z | 0 | 0 | %100 |
| 99 | MP1C | X | .626 | .626 | %100 |
| 100 | MP1C | Z | 0 | 0 | %100 |
| 101 | MP3B | X | .626 | .626 | %100 |
| 102 | MP3B | Z | 0 | 0 | %100 |
| 103 | MP4B | X | .626 | .626 | %100 |
| 104 | MP4B | Z | 0 | 0 | %100 |
| 105 | MP2B | X | .626 | .626 | %100 |
| 106 | MP2B | Z | 0 | 0 | %100 |
| 107 | MP1B | X | .626 | .626 | %100 |
| 108 | MP1B | Z | 0 | 0 | %100 |
| 109 | M109 | X | 0 | 0 | %100 |
| 110 | M109 | Z | 0 | 0 | %100 |
| 111 | M112 | X | .542 | .542 | %100 |
| 112 | M112 | Z | 0 | 0 | %100 |
| 113 | M115 | X | .542 | .542 | %100 |
| 114 | M115 | Z | 0 | 0 | %100 |

Member Distributed Loads (BLC 69 : Structure Wm (120 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k. | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | .197 | .197 | 0 | %100 |
| 2 | M1 | Z | .114 | .114 | 0 | %100 |
| 3 | M4 | X | .665 | .665 | 0 | %100 |
| 4 | M4 | Z | .384 | .384 | 0 | %100 |
| 5 | M10 | X | .187 | .187 | 0 | %100 |
| 6 | M10 | Z | .108 | .108 | 0 | %100 |
| 7 | MP3A | X | .542 | .542 | 0 | %100 |
| 8 | MP3A | Z | .313 | .313 | 0 | %100 |
| 9 | MP4A | X | .542 | .542 | 0 | %100 |
| 10 | MP4A | Z | .313 | .313 | 0 | %100 |
| 11 | MP2A | X | .542 | .542 | 0 | %100 |
| 12 | MP2A | Z | .313 | .313 | 0 | %100 |
| 13 | MP1A | X | .542 | .542 | 0 | %100 |
| 14 | MP1A | Z | .313 | .313 | 0 | %100 |
| 15 | M43 | X | .187 | .187 | 0 | %100 |
| 16 | M43 | Z | .108 | .108 | 0 | %100 |
| 17 | M46 | X | .342 | .342 | 0 | %100 |
| 18 | M46 | Z | .198 | .198 | 0 | %100 |
| 19 | M51B | X | .19 | .19 | 0 | %100 |
| 20 | M51B | Z | .11 | .11 | 0 | %100 |
| 21 | M52B | X | .761 | .761 | 0 | %100 |
| 22 | M52B | Z | .439 | .439 | 0 | %100 |
| 23 | M76 | X | 1.027 | 1.027 | 0 | %100 |
| 24 | M76 | Z | .593 | .593 | 0 | %100 |
| 25 | M77 | X | .349 | .349 | 0 | %100 |
| 26 | M77 | Z | .201 | .201 | 0 | %100 |
| 27 | M80 | X | .367 | .367 | 0 | %100 |
| 28 | M80 | Z | .212 | .212 | 0 | %100 |
| 29 | M84 | X | 1.027 | 1.027 | 0 | %100 |
| 30 | M84 | Z | .593 | .593 | 0 | %100 |
| 31 | M85 | X | 1.395 | 1.395 | 0 | %100 |
| 32 | M85 | Z | .806 | .806 | 0 | %100 |
| 33 | M91 | X | 1.47 | 1.47 | 0 | %100 |
| 34 | M91 | Z | .848 | .848 | 0 | %100 |
| 35 | M34 | X | .197 | .197 | 0 | %100 |
| 36 | M34 | Z | .114 | .114 | 0 | %100 |
| 37 | M43A | X | .789 | .789 | 0 | %100 |
| 38 | M43A | Z | .456 | .456 | 0 | %100 |
| 39 | M52A | X | .665 | .665 | 0 | %100 |
| 40 | M52A | Z | .384 | .384 | 0 | %100 |
| 41 | M53 | X | .187 | .187 | 0 | %100 |
| 42 | M53 | Z | .108 | .108 | 0 | %100 |
| 43 | M54 | X | .187 | .187 | 0 | %100 |
| 44 | M54 | Z | .108 | .108 | 0 | %100 |
| 45 | M55 | X | .342 | .342 | 0 | %100 |
| 46 | M55 | Z | .198 | .198 | 0 | %100 |
| 47 | M58A | X | .761 | .761 | 0 | %100 |
| 48 | M58A | Z | .439 | .439 | 0 | %100 |
| 49 | M59A | X | .19 | .19 | 0 | %100 |
| 50 | M59A | Z | .11 | .11 | 0 | %100 |
| 51 | M63 | X | 1.027 | 1.027 | 0 | %100 |
| 52 | M63 | Z | .593 | .593 | 0 | %100 |
| 53 | M64 | X | 1.395 | 1.395 | 0 | %100 |
| 54 | M64 | Z | .806 | .806 | 0 | %100 |
| 55 | M66 | X | 1.47 | 1.47 | 0 | %100 |
| 56 | M66 | Z | .848 | .848 | 0 | %100 |
| 57 | M68 | X | 1.027 | 1.027 | 0 | %100 |

Member Distributed Loads (BLC 69 : Structure Wm (120 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 58 | M68 | Z | .593 | .593 | 0 %100 |
| 59 | M69 | X | .349 | .349 | 0 %100 |
| 60 | M69 | Z | .201 | .201 | 0 %100 |
| 61 | M71 | X | .367 | .367 | 0 %100 |
| 62 | M71 | Z | .212 | .212 | 0 %100 |
| 63 | M76A | X | 0 | 0 | 0 %100 |
| 64 | M76A | Z | 0 | 0 | 0 %100 |
| 65 | M77A | X | .746 | .746 | 0 %100 |
| 66 | M77A | Z | .431 | .431 | 0 %100 |
| 67 | M78 | X | .746 | .746 | 0 %100 |
| 68 | M78 | Z | .431 | .431 | 0 %100 |
| 69 | M79A | X | 1.37 | 1.37 | 0 %100 |
| 70 | M79A | Z | .791 | .791 | 0 %100 |
| 71 | M82 | X | .19 | .19 | 0 %100 |
| 72 | M82 | Z | .11 | .11 | 0 %100 |
| 73 | M83A | X | .19 | .19 | 0 %100 |
| 74 | M83A | Z | .11 | .11 | 0 %100 |
| 75 | M87 | X | 0 | 0 | 0 %100 |
| 76 | M87 | Z | 0 | 0 | 0 %100 |
| 77 | M88A | X | .349 | .349 | 0 %100 |
| 78 | M88A | Z | .201 | .201 | 0 %100 |
| 79 | M90 | X | .367 | .367 | 0 %100 |
| 80 | M90 | Z | .212 | .212 | 0 %100 |
| 81 | M92A | X | 0 | 0 | 0 %100 |
| 82 | M92A | Z | 0 | 0 | 0 %100 |
| 83 | M93 | X | .349 | .349 | 0 %100 |
| 84 | M93 | Z | .201 | .201 | 0 %100 |
| 85 | M95 | X | .367 | .367 | 0 %100 |
| 86 | M95 | Z | .212 | .212 | 0 %100 |
| 87 | M84B | X | .136 | .136 | 0 %100 |
| 88 | M84B | Z | .078 | .078 | 0 %100 |
| 89 | M89A | X | .136 | .136 | 0 %100 |
| 90 | M89A | Z | .078 | .078 | 0 %100 |
| 91 | M94A | X | .542 | .542 | 0 %100 |
| 92 | M94A | Z | .313 | .313 | 0 %100 |
| 93 | MP3C | X | .542 | .542 | 0 %100 |
| 94 | MP3C | Z | .313 | .313 | 0 %100 |
| 95 | MP4C | X | .542 | .542 | 0 %100 |
| 96 | MP4C | Z | .313 | .313 | 0 %100 |
| 97 | MP2C | X | .542 | .542 | 0 %100 |
| 98 | MP2C | Z | .313 | .313 | 0 %100 |
| 99 | MP1C | X | .542 | .542 | 0 %100 |
| 100 | MP1C | Z | .313 | .313 | 0 %100 |
| 101 | MP3B | X | .542 | .542 | 0 %100 |
| 102 | MP3B | Z | .313 | .313 | 0 %100 |
| 103 | MP4B | X | .542 | .542 | 0 %100 |
| 104 | MP4B | Z | .313 | .313 | 0 %100 |
| 105 | MP2B | X | .542 | .542 | 0 %100 |
| 106 | MP2B | Z | .313 | .313 | 0 %100 |
| 107 | MP1B | X | .542 | .542 | 0 %100 |
| 108 | MP1B | Z | .313 | .313 | 0 %100 |
| 109 | M109 | X | .156 | .156 | 0 %100 |
| 110 | M109 | Z | .09 | .09 | 0 %100 |
| 111 | M112 | X | .156 | .156 | 0 %100 |
| 112 | M112 | Z | .09 | .09 | 0 %100 |
| 113 | M115 | X | .625 | .625 | 0 %100 |
| 114 | M115 | Z | .361 | .361 | 0 %100 |

Member Distributed Loads (BLC 70 : Structure Wm (150 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 1 | M1 | X | .342 | .342 | 0 | %100 |
| 2 | M1 | Z | .592 | .592 | 0 | %100 |
| 3 | M4 | X | .128 | .128 | 0 | %100 |
| 4 | M4 | Z | .222 | .222 | 0 | %100 |
| 5 | M10 | X | .323 | .323 | 0 | %100 |
| 6 | M10 | Z | .56 | .56 | 0 | %100 |
| 7 | MP3A | X | .313 | .313 | 0 | %100 |
| 8 | MP3A | Z | .542 | .542 | 0 | %100 |
| 9 | MP4A | X | .313 | .313 | 0 | %100 |
| 10 | MP4A | Z | .542 | .542 | 0 | %100 |
| 11 | MP2A | X | .313 | .313 | 0 | %100 |
| 12 | MP2A | Z | .542 | .542 | 0 | %100 |
| 13 | MP1A | X | .313 | .313 | 0 | %100 |
| 14 | MP1A | Z | .542 | .542 | 0 | %100 |
| 15 | M43 | X | .323 | .323 | 0 | %100 |
| 16 | M43 | Z | .56 | .56 | 0 | %100 |
| 17 | M46 | X | .593 | .593 | 0 | %100 |
| 18 | M46 | Z | 1.027 | 1.027 | 0 | %100 |
| 19 | M51B | X | 0 | 0 | 0 | %100 |
| 20 | M51B | Z | 0 | 0 | 0 | %100 |
| 21 | M52B | X | .329 | .329 | 0 | %100 |
| 22 | M52B | Z | .57 | .57 | 0 | %100 |
| 23 | M76 | X | .198 | .198 | 0 | %100 |
| 24 | M76 | Z | .342 | .342 | 0 | %100 |
| 25 | M77 | X | 0 | 0 | 0 | %100 |
| 26 | M77 | Z | 0 | 0 | 0 | %100 |
| 27 | M80 | X | 0 | 0 | 0 | %100 |
| 28 | M80 | Z | 0 | 0 | 0 | %100 |
| 29 | M84 | X | .198 | .198 | 0 | %100 |
| 30 | M84 | Z | .342 | .342 | 0 | %100 |
| 31 | M85 | X | .604 | .604 | 0 | %100 |
| 32 | M85 | Z | 1.046 | 1.046 | 0 | %100 |
| 33 | M91 | X | .636 | .636 | 0 | %100 |
| 34 | M91 | Z | 1.102 | 1.102 | 0 | %100 |
| 35 | M34 | X | 0 | 0 | 0 | %100 |
| 36 | M34 | Z | 0 | 0 | 0 | %100 |
| 37 | M43A | X | .342 | .342 | 0 | %100 |
| 38 | M43A | Z | .592 | .592 | 0 | %100 |
| 39 | M52A | X | .512 | .512 | 0 | %100 |
| 40 | M52A | Z | .887 | .887 | 0 | %100 |
| 41 | M53 | X | 0 | 0 | 0 | %100 |
| 42 | M53 | Z | 0 | 0 | 0 | %100 |
| 43 | M54 | X | 0 | 0 | 0 | %100 |
| 44 | M54 | Z | 0 | 0 | 0 | %100 |
| 45 | M55 | X | 0 | 0 | 0 | %100 |
| 46 | M55 | Z | 0 | 0 | 0 | %100 |
| 47 | M58A | X | .329 | .329 | 0 | %100 |
| 48 | M58A | Z | .57 | .57 | 0 | %100 |
| 49 | M59A | X | .329 | .329 | 0 | %100 |
| 50 | M59A | Z | .57 | .57 | 0 | %100 |
| 51 | M63 | X | .791 | .791 | 0 | %100 |
| 52 | M63 | Z | 1.37 | 1.37 | 0 | %100 |
| 53 | M64 | X | .604 | .604 | 0 | %100 |
| 54 | M64 | Z | 1.046 | 1.046 | 0 | %100 |
| 55 | M66 | X | .636 | .636 | 0 | %100 |
| 56 | M66 | Z | 1.102 | 1.102 | 0 | %100 |
| 57 | M68 | X | .791 | .791 | 0 | %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 70 : Structure Wm (150 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | 1.37 | 1.37 | 0 %100 |
| 59 | M69 | X | .604 | .604 | 0 %100 |
| 60 | M69 | Z | 1.046 | 1.046 | 0 %100 |
| 61 | M71 | X | .636 | .636 | 0 %100 |
| 62 | M71 | Z | 1.102 | 1.102 | 0 %100 |
| 63 | M76A | X | .128 | .128 | 0 %100 |
| 64 | M76A | Z | .222 | .222 | 0 %100 |
| 65 | M77A | X | .323 | .323 | 0 %100 |
| 66 | M77A | Z | .56 | .56 | 0 %100 |
| 67 | M78 | X | .323 | .323 | 0 %100 |
| 68 | M78 | Z | .56 | .56 | 0 %100 |
| 69 | M79A | X | .593 | .593 | 0 %100 |
| 70 | M79A | Z | 1.027 | 1.027 | 0 %100 |
| 71 | M82 | X | .329 | .329 | 0 %100 |
| 72 | M82 | Z | .57 | .57 | 0 %100 |
| 73 | M83A | X | 0 | 0 | 0 %100 |
| 74 | M83A | Z | 0 | 0 | 0 %100 |
| 75 | M87 | X | .198 | .198 | 0 %100 |
| 76 | M87 | Z | .342 | .342 | 0 %100 |
| 77 | M88A | X | .604 | .604 | 0 %100 |
| 78 | M88A | Z | 1.046 | 1.046 | 0 %100 |
| 79 | M90 | X | .636 | .636 | 0 %100 |
| 80 | M90 | Z | 1.102 | 1.102 | 0 %100 |
| 81 | M92A | X | .198 | .198 | 0 %100 |
| 82 | M92A | Z | .342 | .342 | 0 %100 |
| 83 | M93 | X | 0 | 0 | 0 %100 |
| 84 | M93 | Z | 0 | 0 | 0 %100 |
| 85 | M95 | X | 0 | 0 | 0 %100 |
| 86 | M95 | Z | 0 | 0 | 0 %100 |
| 87 | M84B | X | .235 | .235 | 0 %100 |
| 88 | M84B | Z | .407 | .407 | 0 %100 |
| 89 | M89A | X | 0 | 0 | 0 %100 |
| 90 | M89A | Z | 0 | 0 | 0 %100 |
| 91 | M94A | X | .235 | .235 | 0 %100 |
| 92 | M94A | Z | .407 | .407 | 0 %100 |
| 93 | MP3C | X | .313 | .313 | 0 %100 |
| 94 | MP3C | Z | .542 | .542 | 0 %100 |
| 95 | MP4C | X | .313 | .313 | 0 %100 |
| 96 | MP4C | Z | .542 | .542 | 0 %100 |
| 97 | MP2C | X | .313 | .313 | 0 %100 |
| 98 | MP2C | Z | .542 | .542 | 0 %100 |
| 99 | MP1C | X | .313 | .313 | 0 %100 |
| 100 | MP1C | Z | .542 | .542 | 0 %100 |
| 101 | MP3B | X | .313 | .313 | 0 %100 |
| 102 | MP3B | Z | .542 | .542 | 0 %100 |
| 103 | MP4B | X | .313 | .313 | 0 %100 |
| 104 | MP4B | Z | .542 | .542 | 0 %100 |
| 105 | MP2B | X | .313 | .313 | 0 %100 |
| 106 | MP2B | Z | .542 | .542 | 0 %100 |
| 107 | MP1B | X | .313 | .313 | 0 %100 |
| 108 | MP1B | Z | .542 | .542 | 0 %100 |
| 109 | M109 | X | .271 | .271 | 0 %100 |
| 110 | M109 | Z | .469 | .469 | 0 %100 |
| 111 | M112 | X | 0 | 0 | 0 %100 |
| 112 | M112 | Z | 0 | 0 | 0 %100 |
| 113 | M115 | X | .271 | .271 | 0 %100 |
| 114 | M115 | Z | .469 | .469 | 0 %100 |

Member Distributed Loads (BLC 71 : Structure Wm (180 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k. | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | 0 | 0 | 0 | %100 |
| 2 | M1 | Z | .912 | .912 | 0 | %100 |
| 3 | M4 | X | 0 | 0 | 0 | %100 |
| 4 | M4 | Z | 0 | 0 | 0 | %100 |
| 5 | M10 | X | 0 | 0 | 0 | %100 |
| 6 | M10 | Z | .862 | .862 | 0 | %100 |
| 7 | MP3A | X | 0 | 0 | 0 | %100 |
| 8 | MP3A | Z | .626 | .626 | 0 | %100 |
| 9 | MP4A | X | 0 | 0 | 0 | %100 |
| 10 | MP4A | Z | .626 | .626 | 0 | %100 |
| 11 | MP2A | X | 0 | 0 | 0 | %100 |
| 12 | MP2A | Z | .626 | .626 | 0 | %100 |
| 13 | MP1A | X | 0 | 0 | 0 | %100 |
| 14 | MP1A | Z | .626 | .626 | 0 | %100 |
| 15 | M43 | X | 0 | 0 | 0 | %100 |
| 16 | M43 | Z | .862 | .862 | 0 | %100 |
| 17 | M46 | X | 0 | 0 | 0 | %100 |
| 18 | M46 | Z | 1.582 | 1.582 | 0 | %100 |
| 19 | M51B | X | 0 | 0 | 0 | %100 |
| 20 | M51B | Z | .22 | .22 | 0 | %100 |
| 21 | M52B | X | 0 | 0 | 0 | %100 |
| 22 | M52B | Z | .22 | .22 | 0 | %100 |
| 23 | M76 | X | 0 | 0 | 0 | %100 |
| 24 | M76 | Z | 0 | 0 | 0 | %100 |
| 25 | M77 | X | 0 | 0 | 0 | %100 |
| 26 | M77 | Z | .403 | .403 | 0 | %100 |
| 27 | M80 | X | 0 | 0 | 0 | %100 |
| 28 | M80 | Z | .424 | .424 | 0 | %100 |
| 29 | M84 | X | 0 | 0 | 0 | %100 |
| 30 | M84 | Z | 0 | 0 | 0 | %100 |
| 31 | M85 | X | 0 | 0 | 0 | %100 |
| 32 | M85 | Z | .403 | .403 | 0 | %100 |
| 33 | M91 | X | 0 | 0 | 0 | %100 |
| 34 | M91 | Z | .424 | .424 | 0 | %100 |
| 35 | M34 | X | 0 | 0 | 0 | %100 |
| 36 | M34 | Z | .228 | .228 | 0 | %100 |
| 37 | M43A | X | 0 | 0 | 0 | %100 |
| 38 | M43A | Z | .228 | .228 | 0 | %100 |
| 39 | M52A | X | 0 | 0 | 0 | %100 |
| 40 | M52A | Z | .768 | .768 | 0 | %100 |
| 41 | M53 | X | 0 | 0 | 0 | %100 |
| 42 | M53 | Z | .215 | .215 | 0 | %100 |
| 43 | M54 | X | 0 | 0 | 0 | %100 |
| 44 | M54 | Z | .215 | .215 | 0 | %100 |
| 45 | M55 | X | 0 | 0 | 0 | %100 |
| 46 | M55 | Z | .395 | .395 | 0 | %100 |
| 47 | M58A | X | 0 | 0 | 0 | %100 |
| 48 | M58A | Z | .22 | .22 | 0 | %100 |
| 49 | M59A | X | 0 | 0 | 0 | %100 |
| 50 | M59A | Z | .878 | .878 | 0 | %100 |
| 51 | M63 | X | 0 | 0 | 0 | %100 |
| 52 | M63 | Z | 1.186 | 1.186 | 0 | %100 |
| 53 | M64 | X | 0 | 0 | 0 | %100 |
| 54 | M64 | Z | .403 | .403 | 0 | %100 |
| 55 | M66 | X | 0 | 0 | 0 | %100 |
| 56 | M66 | Z | .424 | .424 | 0 | %100 |
| 57 | M68 | X | 0 | 0 | 0 | %100 |

Member Distributed Loads (BLC 71 : Structure Wm (180 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | 1.186 | 1.186 | 0 %100 |
| 59 | M69 | X | 0 | 0 | 0 %100 |
| 60 | M69 | Z | 1.611 | 1.611 | 0 %100 |
| 61 | M71 | X | 0 | 0 | 0 %100 |
| 62 | M71 | Z | 1.697 | 1.697 | 0 %100 |
| 63 | M76A | X | 0 | 0 | 0 %100 |
| 64 | M76A | Z | .768 | .768 | 0 %100 |
| 65 | M77A | X | 0 | 0 | 0 %100 |
| 66 | M77A | Z | .215 | .215 | 0 %100 |
| 67 | M78 | X | 0 | 0 | 0 %100 |
| 68 | M78 | Z | .215 | .215 | 0 %100 |
| 69 | M79A | X | 0 | 0 | 0 %100 |
| 70 | M79A | Z | .395 | .395 | 0 %100 |
| 71 | M82 | X | 0 | 0 | 0 %100 |
| 72 | M82 | Z | .878 | .878 | 0 %100 |
| 73 | M83A | X | 0 | 0 | 0 %100 |
| 74 | M83A | Z | .22 | .22 | 0 %100 |
| 75 | M87 | X | 0 | 0 | 0 %100 |
| 76 | M87 | Z | 1.186 | 1.186 | 0 %100 |
| 77 | M88A | X | 0 | 0 | 0 %100 |
| 78 | M88A | Z | 1.611 | 1.611 | 0 %100 |
| 79 | M90 | X | 0 | 0 | 0 %100 |
| 80 | M90 | Z | 1.697 | 1.697 | 0 %100 |
| 81 | M92A | X | 0 | 0 | 0 %100 |
| 82 | M92A | Z | 1.186 | 1.186 | 0 %100 |
| 83 | M93 | X | 0 | 0 | 0 %100 |
| 84 | M93 | Z | .403 | .403 | 0 %100 |
| 85 | M95 | X | 0 | 0 | 0 %100 |
| 86 | M95 | Z | .424 | .424 | 0 %100 |
| 87 | M84B | X | 0 | 0 | 0 %100 |
| 88 | M84B | Z | .626 | .626 | 0 %100 |
| 89 | M89A | X | 0 | 0 | 0 %100 |
| 90 | M89A | Z | .157 | .157 | 0 %100 |
| 91 | M94A | X | 0 | 0 | 0 %100 |
| 92 | M94A | Z | .157 | .157 | 0 %100 |
| 93 | MP3C | X | 0 | 0 | 0 %100 |
| 94 | MP3C | Z | .626 | .626 | 0 %100 |
| 95 | MP4C | X | 0 | 0 | 0 %100 |
| 96 | MP4C | Z | .626 | .626 | 0 %100 |
| 97 | MP2C | X | 0 | 0 | 0 %100 |
| 98 | MP2C | Z | .626 | .626 | 0 %100 |
| 99 | MP1C | X | 0 | 0 | 0 %100 |
| 100 | MP1C | Z | .626 | .626 | 0 %100 |
| 101 | MP3B | X | 0 | 0 | 0 %100 |
| 102 | MP3B | Z | .626 | .626 | 0 %100 |
| 103 | MP4B | X | 0 | 0 | 0 %100 |
| 104 | MP4B | Z | .626 | .626 | 0 %100 |
| 105 | MP2B | X | 0 | 0 | 0 %100 |
| 106 | MP2B | Z | .626 | .626 | 0 %100 |
| 107 | MP1B | X | 0 | 0 | 0 %100 |
| 108 | MP1B | Z | .626 | .626 | 0 %100 |
| 109 | M109 | X | 0 | 0 | 0 %100 |
| 110 | M109 | Z | .722 | .722 | 0 %100 |
| 111 | M112 | X | 0 | 0 | 0 %100 |
| 112 | M112 | Z | .181 | .181 | 0 %100 |
| 113 | M115 | X | 0 | 0 | 0 %100 |
| 114 | M115 | Z | .181 | .181 | 0 %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 72 : Structure Wm (210 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 1 | M1 | X | -.342 | -.342 | 0 | %100 |
| 2 | M1 | Z | .592 | .592 | 0 | %100 |
| 3 | M4 | X | -.128 | -.128 | 0 | %100 |
| 4 | M4 | Z | .222 | .222 | 0 | %100 |
| 5 | M10 | X | -.323 | -.323 | 0 | %100 |
| 6 | M10 | Z | .56 | .56 | 0 | %100 |
| 7 | MP3A | X | -.313 | -.313 | 0 | %100 |
| 8 | MP3A | Z | .542 | .542 | 0 | %100 |
| 9 | MP4A | X | -.313 | -.313 | 0 | %100 |
| 10 | MP4A | Z | .542 | .542 | 0 | %100 |
| 11 | MP2A | X | -.313 | -.313 | 0 | %100 |
| 12 | MP2A | Z | .542 | .542 | 0 | %100 |
| 13 | MP1A | X | -.313 | -.313 | 0 | %100 |
| 14 | MP1A | Z | .542 | .542 | 0 | %100 |
| 15 | M43 | X | -.323 | -.323 | 0 | %100 |
| 16 | M43 | Z | .56 | .56 | 0 | %100 |
| 17 | M46 | X | -.593 | -.593 | 0 | %100 |
| 18 | M46 | Z | 1.027 | 1.027 | 0 | %100 |
| 19 | M51B | X | -.329 | -.329 | 0 | %100 |
| 20 | M51B | Z | .57 | .57 | 0 | %100 |
| 21 | M52B | X | 0 | 0 | 0 | %100 |
| 22 | M52B | Z | 0 | 0 | 0 | %100 |
| 23 | M76 | X | -.198 | -.198 | 0 | %100 |
| 24 | M76 | Z | .342 | .342 | 0 | %100 |
| 25 | M77 | X | -.604 | -.604 | 0 | %100 |
| 26 | M77 | Z | 1.046 | 1.046 | 0 | %100 |
| 27 | M80 | X | -.636 | -.636 | 0 | %100 |
| 28 | M80 | Z | 1.102 | 1.102 | 0 | %100 |
| 29 | M84 | X | -.198 | -.198 | 0 | %100 |
| 30 | M84 | Z | .342 | .342 | 0 | %100 |
| 31 | M85 | X | 0 | 0 | 0 | %100 |
| 32 | M85 | Z | 0 | 0 | 0 | %100 |
| 33 | M91 | X | 0 | 0 | 0 | %100 |
| 34 | M91 | Z | 0 | 0 | 0 | %100 |
| 35 | M34 | X | -.342 | -.342 | 0 | %100 |
| 36 | M34 | Z | .592 | .592 | 0 | %100 |
| 37 | M43A | X | 0 | 0 | 0 | %100 |
| 38 | M43A | Z | 0 | 0 | 0 | %100 |
| 39 | M52A | X | -.128 | -.128 | 0 | %100 |
| 40 | M52A | Z | .222 | .222 | 0 | %100 |
| 41 | M53 | X | -.323 | -.323 | 0 | %100 |
| 42 | M53 | Z | .56 | .56 | 0 | %100 |
| 43 | M54 | X | -.323 | -.323 | 0 | %100 |
| 44 | M54 | Z | .56 | .56 | 0 | %100 |
| 45 | M55 | X | -.593 | -.593 | 0 | %100 |
| 46 | M55 | Z | 1.027 | 1.027 | 0 | %100 |
| 47 | M58A | X | 0 | 0 | 0 | %100 |
| 48 | M58A | Z | 0 | 0 | 0 | %100 |
| 49 | M59A | X | -.329 | -.329 | 0 | %100 |
| 50 | M59A | Z | .57 | .57 | 0 | %100 |
| 51 | M63 | X | -.198 | -.198 | 0 | %100 |
| 52 | M63 | Z | .342 | .342 | 0 | %100 |
| 53 | M64 | X | 0 | 0 | 0 | %100 |
| 54 | M64 | Z | 0 | 0 | 0 | %100 |
| 55 | M66 | X | 0 | 0 | 0 | %100 |
| 56 | M66 | Z | 0 | 0 | 0 | %100 |
| 57 | M68 | X | -.198 | -.198 | 0 | %100 |

Member Distributed Loads (BLC 72 : Structure Wm (210 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 58 | M68 | Z | .342 | .342 | 0 %100 |
| 59 | M69 | X | -.604 | -.604 | 0 %100 |
| 60 | M69 | Z | 1.046 | 1.046 | 0 %100 |
| 61 | M71 | X | -.636 | -.636 | 0 %100 |
| 62 | M71 | Z | 1.102 | 1.102 | 0 %100 |
| 63 | M76A | X | -.512 | -.512 | 0 %100 |
| 64 | M76A | Z | .887 | .887 | 0 %100 |
| 65 | M77A | X | 0 | 0 | 0 %100 |
| 66 | M77A | Z | 0 | 0 | 0 %100 |
| 67 | M78 | X | 0 | 0 | 0 %100 |
| 68 | M78 | Z | 0 | 0 | 0 %100 |
| 69 | M79A | X | 0 | 0 | 0 %100 |
| 70 | M79A | Z | 0 | 0 | 0 %100 |
| 71 | M82 | X | -.329 | -.329 | 0 %100 |
| 72 | M82 | Z | .57 | .57 | 0 %100 |
| 73 | M83A | X | -.329 | -.329 | 0 %100 |
| 74 | M83A | Z | .57 | .57 | 0 %100 |
| 75 | M87 | X | -.791 | -.791 | 0 %100 |
| 76 | M87 | Z | 1.37 | 1.37 | 0 %100 |
| 77 | M88A | X | -.604 | -.604 | 0 %100 |
| 78 | M88A | Z | 1.046 | 1.046 | 0 %100 |
| 79 | M90 | X | -.636 | -.636 | 0 %100 |
| 80 | M90 | Z | 1.102 | 1.102 | 0 %100 |
| 81 | M92A | X | -.791 | -.791 | 0 %100 |
| 82 | M92A | Z | 1.37 | 1.37 | 0 %100 |
| 83 | M93 | X | -.604 | -.604 | 0 %100 |
| 84 | M93 | Z | 1.046 | 1.046 | 0 %100 |
| 85 | M95 | X | -.636 | -.636 | 0 %100 |
| 86 | M95 | Z | 1.102 | 1.102 | 0 %100 |
| 87 | M84B | X | -.235 | -.235 | 0 %100 |
| 88 | M84B | Z | .407 | .407 | 0 %100 |
| 89 | M89A | X | -.235 | -.235 | 0 %100 |
| 90 | M89A | Z | .407 | .407 | 0 %100 |
| 91 | M94A | X | 0 | 0 | 0 %100 |
| 92 | M94A | Z | 0 | 0 | 0 %100 |
| 93 | MP3C | X | -.313 | -.313 | 0 %100 |
| 94 | MP3C | Z | .542 | .542 | 0 %100 |
| 95 | MP4C | X | -.313 | -.313 | 0 %100 |
| 96 | MP4C | Z | .542 | .542 | 0 %100 |
| 97 | MP2C | X | -.313 | -.313 | 0 %100 |
| 98 | MP2C | Z | .542 | .542 | 0 %100 |
| 99 | MP1C | X | -.313 | -.313 | 0 %100 |
| 100 | MP1C | Z | .542 | .542 | 0 %100 |
| 101 | MP3B | X | -.313 | -.313 | 0 %100 |
| 102 | MP3B | Z | .542 | .542 | 0 %100 |
| 103 | MP4B | X | -.313 | -.313 | 0 %100 |
| 104 | MP4B | Z | .542 | .542 | 0 %100 |
| 105 | MP2B | X | -.313 | -.313 | 0 %100 |
| 106 | MP2B | Z | .542 | .542 | 0 %100 |
| 107 | MP1B | X | -.313 | -.313 | 0 %100 |
| 108 | MP1B | Z | .542 | .542 | 0 %100 |
| 109 | M109 | X | -.271 | -.271 | 0 %100 |
| 110 | M109 | Z | .469 | .469 | 0 %100 |
| 111 | M112 | X | -.271 | -.271 | 0 %100 |
| 112 | M112 | Z | .469 | .469 | 0 %100 |
| 113 | M115 | X | 0 | 0 | 0 %100 |
| 114 | M115 | Z | 0 | 0 | 0 %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 73 : Structure Wm (240 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | -.197 | -.197 | 0 | %100 |
| 2 | M1 | Z | .114 | .114 | 0 | %100 |
| 3 | M4 | X | -.665 | -.665 | 0 | %100 |
| 4 | M4 | Z | .384 | .384 | 0 | %100 |
| 5 | M10 | X | -.187 | -.187 | 0 | %100 |
| 6 | M10 | Z | .108 | .108 | 0 | %100 |
| 7 | MP3A | X | -.542 | -.542 | 0 | %100 |
| 8 | MP3A | Z | .313 | .313 | 0 | %100 |
| 9 | MP4A | X | -.542 | -.542 | 0 | %100 |
| 10 | MP4A | Z | .313 | .313 | 0 | %100 |
| 11 | MP2A | X | -.542 | -.542 | 0 | %100 |
| 12 | MP2A | Z | .313 | .313 | 0 | %100 |
| 13 | MP1A | X | -.542 | -.542 | 0 | %100 |
| 14 | MP1A | Z | .313 | .313 | 0 | %100 |
| 15 | M43 | X | -.187 | -.187 | 0 | %100 |
| 16 | M43 | Z | .108 | .108 | 0 | %100 |
| 17 | M46 | X | -.342 | -.342 | 0 | %100 |
| 18 | M46 | Z | .198 | .198 | 0 | %100 |
| 19 | M51B | X | -.761 | -.761 | 0 | %100 |
| 20 | M51B | Z | .439 | .439 | 0 | %100 |
| 21 | M52B | X | -.19 | -.19 | 0 | %100 |
| 22 | M52B | Z | .11 | .11 | 0 | %100 |
| 23 | M76 | X | -1.027 | -1.027 | 0 | %100 |
| 24 | M76 | Z | .593 | .593 | 0 | %100 |
| 25 | M77 | X | -1.395 | -1.395 | 0 | %100 |
| 26 | M77 | Z | .806 | .806 | 0 | %100 |
| 27 | M80 | X | -1.47 | -1.47 | 0 | %100 |
| 28 | M80 | Z | .848 | .848 | 0 | %100 |
| 29 | M84 | X | -1.027 | -1.027 | 0 | %100 |
| 30 | M84 | Z | .593 | .593 | 0 | %100 |
| 31 | M85 | X | -.349 | -.349 | 0 | %100 |
| 32 | M85 | Z | .201 | .201 | 0 | %100 |
| 33 | M91 | X | -.367 | -.367 | 0 | %100 |
| 34 | M91 | Z | .212 | .212 | 0 | %100 |
| 35 | M34 | X | -.789 | -.789 | 0 | %100 |
| 36 | M34 | Z | .456 | .456 | 0 | %100 |
| 37 | M43A | X | -.197 | -.197 | 0 | %100 |
| 38 | M43A | Z | .114 | .114 | 0 | %100 |
| 39 | M52A | X | 0 | 0 | 0 | %100 |
| 40 | M52A | Z | 0 | 0 | 0 | %100 |
| 41 | M53 | X | -.746 | -.746 | 0 | %100 |
| 42 | M53 | Z | .431 | .431 | 0 | %100 |
| 43 | M54 | X | -.746 | -.746 | 0 | %100 |
| 44 | M54 | Z | .431 | .431 | 0 | %100 |
| 45 | M55 | X | -1.37 | -1.37 | 0 | %100 |
| 46 | M55 | Z | .791 | .791 | 0 | %100 |
| 47 | M58A | X | -.19 | -.19 | 0 | %100 |
| 48 | M58A | Z | .11 | .11 | 0 | %100 |
| 49 | M59A | X | -.19 | -.19 | 0 | %100 |
| 50 | M59A | Z | .11 | .11 | 0 | %100 |
| 51 | M63 | X | 0 | 0 | 0 | %100 |
| 52 | M63 | Z | 0 | 0 | 0 | %100 |
| 53 | M64 | X | -.349 | -.349 | 0 | %100 |
| 54 | M64 | Z | .201 | .201 | 0 | %100 |
| 55 | M66 | X | -.367 | -.367 | 0 | %100 |
| 56 | M66 | Z | .212 | .212 | 0 | %100 |
| 57 | M68 | X | 0 | 0 | 0 | %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 73 : Structure Wm (240 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] | |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|------|
| 58 | M68 | Z | 0 | 0 | %100 | |
| 59 | M69 | X | -.349 | -.349 | 0 | %100 |
| 60 | M69 | Z | .201 | .201 | 0 | %100 |
| 61 | M71 | X | -.367 | -.367 | 0 | %100 |
| 62 | M71 | Z | .212 | .212 | 0 | %100 |
| 63 | M76A | X | -.665 | -.665 | 0 | %100 |
| 64 | M76A | Z | .384 | .384 | 0 | %100 |
| 65 | M77A | X | -.187 | -.187 | 0 | %100 |
| 66 | M77A | Z | .108 | .108 | 0 | %100 |
| 67 | M78 | X | -.187 | -.187 | 0 | %100 |
| 68 | M78 | Z | .108 | .108 | 0 | %100 |
| 69 | M79A | X | -.342 | -.342 | 0 | %100 |
| 70 | M79A | Z | .198 | .198 | 0 | %100 |
| 71 | M82 | X | -.19 | -.19 | 0 | %100 |
| 72 | M82 | Z | .11 | .11 | 0 | %100 |
| 73 | M83A | X | -.761 | -.761 | 0 | %100 |
| 74 | M83A | Z | .439 | .439 | 0 | %100 |
| 75 | M87 | X | -1.027 | -1.027 | 0 | %100 |
| 76 | M87 | Z | .593 | .593 | 0 | %100 |
| 77 | M88A | X | -.349 | -.349 | 0 | %100 |
| 78 | M88A | Z | .201 | .201 | 0 | %100 |
| 79 | M90 | X | -.367 | -.367 | 0 | %100 |
| 80 | M90 | Z | .212 | .212 | 0 | %100 |
| 81 | M92A | X | -1.027 | -1.027 | 0 | %100 |
| 82 | M92A | Z | .593 | .593 | 0 | %100 |
| 83 | M93 | X | -1.395 | -1.395 | 0 | %100 |
| 84 | M93 | Z | .806 | .806 | 0 | %100 |
| 85 | M95 | X | -1.47 | -1.47 | 0 | %100 |
| 86 | M95 | Z | .848 | .848 | 0 | %100 |
| 87 | M84B | X | -.136 | -.136 | 0 | %100 |
| 88 | M84B | Z | .078 | .078 | 0 | %100 |
| 89 | M89A | X | -.542 | -.542 | 0 | %100 |
| 90 | M89A | Z | .313 | .313 | 0 | %100 |
| 91 | M94A | X | -.136 | -.136 | 0 | %100 |
| 92 | M94A | Z | .078 | .078 | 0 | %100 |
| 93 | MP3C | X | -.542 | -.542 | 0 | %100 |
| 94 | MP3C | Z | .313 | .313 | 0 | %100 |
| 95 | MP4C | X | -.542 | -.542 | 0 | %100 |
| 96 | MP4C | Z | .313 | .313 | 0 | %100 |
| 97 | MP2C | X | -.542 | -.542 | 0 | %100 |
| 98 | MP2C | Z | .313 | .313 | 0 | %100 |
| 99 | MP1C | X | -.542 | -.542 | 0 | %100 |
| 100 | MP1C | Z | .313 | .313 | 0 | %100 |
| 101 | MP3B | X | -.542 | -.542 | 0 | %100 |
| 102 | MP3B | Z | .313 | .313 | 0 | %100 |
| 103 | MP4B | X | -.542 | -.542 | 0 | %100 |
| 104 | MP4B | Z | .313 | .313 | 0 | %100 |
| 105 | MP2B | X | -.542 | -.542 | 0 | %100 |
| 106 | MP2B | Z | .313 | .313 | 0 | %100 |
| 107 | MP1B | X | -.542 | -.542 | 0 | %100 |
| 108 | MP1B | Z | .313 | .313 | 0 | %100 |
| 109 | M109 | X | -.156 | -.156 | 0 | %100 |
| 110 | M109 | Z | .09 | .09 | 0 | %100 |
| 111 | M112 | X | -.625 | -.625 | 0 | %100 |
| 112 | M112 | Z | .361 | .361 | 0 | %100 |
| 113 | M115 | X | -.156 | -.156 | 0 | %100 |
| 114 | M115 | Z | .09 | .09 | 0 | %100 |

Member Distributed Loads (BLC 74 : Structure Wm (270 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 1 | M1 | X | 0 | 0 | 0 | %100 |
| 2 | M1 | Z | 0 | 0 | 0 | %100 |
| 3 | M4 | X | -1.025 | -1.025 | 0 | %100 |
| 4 | M4 | Z | 0 | 0 | 0 | %100 |
| 5 | M10 | X | 0 | 0 | 0 | %100 |
| 6 | M10 | Z | 0 | 0 | 0 | %100 |
| 7 | MP3A | X | -0.626 | -0.626 | 0 | %100 |
| 8 | MP3A | Z | 0 | 0 | 0 | %100 |
| 9 | MP4A | X | -0.626 | -0.626 | 0 | %100 |
| 10 | MP4A | Z | 0 | 0 | 0 | %100 |
| 11 | MP2A | X | -0.626 | -0.626 | 0 | %100 |
| 12 | MP2A | Z | 0 | 0 | 0 | %100 |
| 13 | MP1A | X | -0.626 | -0.626 | 0 | %100 |
| 14 | MP1A | Z | 0 | 0 | 0 | %100 |
| 15 | M43 | X | 0 | 0 | 0 | %100 |
| 16 | M43 | Z | 0 | 0 | 0 | %100 |
| 17 | M46 | X | 0 | 0 | 0 | %100 |
| 18 | M46 | Z | 0 | 0 | 0 | %100 |
| 19 | M51B | X | -0.659 | -0.659 | 0 | %100 |
| 20 | M51B | Z | 0 | 0 | 0 | %100 |
| 21 | M52B | X | -0.659 | -0.659 | 0 | %100 |
| 22 | M52B | Z | 0 | 0 | 0 | %100 |
| 23 | M76 | X | -1.582 | -1.582 | 0 | %100 |
| 24 | M76 | Z | 0 | 0 | 0 | %100 |
| 25 | M77 | X | -1.208 | -1.208 | 0 | %100 |
| 26 | M77 | Z | 0 | 0 | 0 | %100 |
| 27 | M80 | X | -1.273 | -1.273 | 0 | %100 |
| 28 | M80 | Z | 0 | 0 | 0 | %100 |
| 29 | M84 | X | -1.582 | -1.582 | 0 | %100 |
| 30 | M84 | Z | 0 | 0 | 0 | %100 |
| 31 | M85 | X | -1.208 | -1.208 | 0 | %100 |
| 32 | M85 | Z | 0 | 0 | 0 | %100 |
| 33 | M91 | X | -1.273 | -1.273 | 0 | %100 |
| 34 | M91 | Z | 0 | 0 | 0 | %100 |
| 35 | M34 | X | -0.684 | -0.684 | 0 | %100 |
| 36 | M34 | Z | 0 | 0 | 0 | %100 |
| 37 | M43A | X | -0.684 | -0.684 | 0 | %100 |
| 38 | M43A | Z | 0 | 0 | 0 | %100 |
| 39 | M52A | X | -0.256 | -0.256 | 0 | %100 |
| 40 | M52A | Z | 0 | 0 | 0 | %100 |
| 41 | M53 | X | -0.646 | -0.646 | 0 | %100 |
| 42 | M53 | Z | 0 | 0 | 0 | %100 |
| 43 | M54 | X | -0.646 | -0.646 | 0 | %100 |
| 44 | M54 | Z | 0 | 0 | 0 | %100 |
| 45 | M55 | X | -1.186 | -1.186 | 0 | %100 |
| 46 | M55 | Z | 0 | 0 | 0 | %100 |
| 47 | M58A | X | -0.659 | -0.659 | 0 | %100 |
| 48 | M58A | Z | 0 | 0 | 0 | %100 |
| 49 | M59A | X | 0 | 0 | 0 | %100 |
| 50 | M59A | Z | 0 | 0 | 0 | %100 |
| 51 | M63 | X | -0.395 | -0.395 | 0 | %100 |
| 52 | M63 | Z | 0 | 0 | 0 | %100 |
| 53 | M64 | X | -1.208 | -1.208 | 0 | %100 |
| 54 | M64 | Z | 0 | 0 | 0 | %100 |
| 55 | M66 | X | -1.273 | -1.273 | 0 | %100 |
| 56 | M66 | Z | 0 | 0 | 0 | %100 |
| 57 | M68 | X | -0.395 | -0.395 | 0 | %100 |

Member Distributed Loads (BLC 74 : Structure Wm (270 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | 0 | 0 | %100 |
| 59 | M69 | X | 0 | 0 | %100 |
| 60 | M69 | Z | 0 | 0 | %100 |
| 61 | M71 | X | 0 | 0 | %100 |
| 62 | M71 | Z | 0 | 0 | %100 |
| 63 | M76A | X | -0.256 | -0.256 | 0 |
| 64 | M76A | Z | 0 | 0 | %100 |
| 65 | M77A | X | -0.646 | -0.646 | 0 |
| 66 | M77A | Z | 0 | 0 | %100 |
| 67 | M78 | X | -0.646 | -0.646 | 0 |
| 68 | M78 | Z | 0 | 0 | %100 |
| 69 | M79A | X | -1.186 | -1.186 | 0 |
| 70 | M79A | Z | 0 | 0 | %100 |
| 71 | M82 | X | 0 | 0 | %100 |
| 72 | M82 | Z | 0 | 0 | %100 |
| 73 | M83A | X | -0.659 | -0.659 | 0 |
| 74 | M83A | Z | 0 | 0 | %100 |
| 75 | M87 | X | -0.395 | -0.395 | 0 |
| 76 | M87 | Z | 0 | 0 | %100 |
| 77 | M88A | X | 0 | 0 | %100 |
| 78 | M88A | Z | 0 | 0 | %100 |
| 79 | M90 | X | 0 | 0 | %100 |
| 80 | M90 | Z | 0 | 0 | %100 |
| 81 | M92A | X | -0.395 | -0.395 | 0 |
| 82 | M92A | Z | 0 | 0 | %100 |
| 83 | M93 | X | -1.208 | -1.208 | 0 |
| 84 | M93 | Z | 0 | 0 | %100 |
| 85 | M95 | X | -1.273 | -1.273 | 0 |
| 86 | M95 | Z | 0 | 0 | %100 |
| 87 | M84B | X | 0 | 0 | %100 |
| 88 | M84B | Z | 0 | 0 | %100 |
| 89 | M89A | X | -0.47 | -0.47 | 0 |
| 90 | M89A | Z | 0 | 0 | %100 |
| 91 | M94A | X | -0.47 | -0.47 | 0 |
| 92 | M94A | Z | 0 | 0 | %100 |
| 93 | MP3C | X | -0.626 | -0.626 | 0 |
| 94 | MP3C | Z | 0 | 0 | %100 |
| 95 | MP4C | X | -0.626 | -0.626 | 0 |
| 96 | MP4C | Z | 0 | 0 | %100 |
| 97 | MP2C | X | -0.626 | -0.626 | 0 |
| 98 | MP2C | Z | 0 | 0 | %100 |
| 99 | MP1C | X | -0.626 | -0.626 | 0 |
| 100 | MP1C | Z | 0 | 0 | %100 |
| 101 | MP3B | X | -0.626 | -0.626 | 0 |
| 102 | MP3B | Z | 0 | 0 | %100 |
| 103 | MP4B | X | -0.626 | -0.626 | 0 |
| 104 | MP4B | Z | 0 | 0 | %100 |
| 105 | MP2B | X | -0.626 | -0.626 | 0 |
| 106 | MP2B | Z | 0 | 0 | %100 |
| 107 | MP1B | X | -0.626 | -0.626 | 0 |
| 108 | MP1B | Z | 0 | 0 | %100 |
| 109 | M109 | X | 0 | 0 | %100 |
| 110 | M109 | Z | 0 | 0 | %100 |
| 111 | M112 | X | -0.542 | -0.542 | 0 |
| 112 | M112 | Z | 0 | 0 | %100 |
| 113 | M115 | X | -0.542 | -0.542 | 0 |
| 114 | M115 | Z | 0 | 0 | %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 75 : Structure Wm (300 Deg))

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|----|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 1 | M1 | X | -.197 | -.197 | 0 | %100 |
| 2 | M1 | Z | -.114 | -.114 | 0 | %100 |
| 3 | M4 | X | -.665 | -.665 | 0 | %100 |
| 4 | M4 | Z | -.384 | -.384 | 0 | %100 |
| 5 | M10 | X | -.187 | -.187 | 0 | %100 |
| 6 | M10 | Z | -.108 | -.108 | 0 | %100 |
| 7 | MP3A | X | -.542 | -.542 | 0 | %100 |
| 8 | MP3A | Z | -.313 | -.313 | 0 | %100 |
| 9 | MP4A | X | -.542 | -.542 | 0 | %100 |
| 10 | MP4A | Z | -.313 | -.313 | 0 | %100 |
| 11 | MP2A | X | -.542 | -.542 | 0 | %100 |
| 12 | MP2A | Z | -.313 | -.313 | 0 | %100 |
| 13 | MP1A | X | -.542 | -.542 | 0 | %100 |
| 14 | MP1A | Z | -.313 | -.313 | 0 | %100 |
| 15 | M43 | X | -.187 | -.187 | 0 | %100 |
| 16 | M43 | Z | -.108 | -.108 | 0 | %100 |
| 17 | M46 | X | -.342 | -.342 | 0 | %100 |
| 18 | M46 | Z | -.198 | -.198 | 0 | %100 |
| 19 | M51B | X | -.19 | -.19 | 0 | %100 |
| 20 | M51B | Z | -.11 | -.11 | 0 | %100 |
| 21 | M52B | X | -.761 | -.761 | 0 | %100 |
| 22 | M52B | Z | -.439 | -.439 | 0 | %100 |
| 23 | M76 | X | -1.027 | -1.027 | 0 | %100 |
| 24 | M76 | Z | -.593 | -.593 | 0 | %100 |
| 25 | M77 | X | -.349 | -.349 | 0 | %100 |
| 26 | M77 | Z | -.201 | -.201 | 0 | %100 |
| 27 | M80 | X | -.367 | -.367 | 0 | %100 |
| 28 | M80 | Z | -.212 | -.212 | 0 | %100 |
| 29 | M84 | X | -1.027 | -1.027 | 0 | %100 |
| 30 | M84 | Z | -.593 | -.593 | 0 | %100 |
| 31 | M85 | X | -1.395 | -1.395 | 0 | %100 |
| 32 | M85 | Z | -.806 | -.806 | 0 | %100 |
| 33 | M91 | X | -1.47 | -1.47 | 0 | %100 |
| 34 | M91 | Z | -.848 | -.848 | 0 | %100 |
| 35 | M34 | X | -.197 | -.197 | 0 | %100 |
| 36 | M34 | Z | -.114 | -.114 | 0 | %100 |
| 37 | M43A | X | -.789 | -.789 | 0 | %100 |
| 38 | M43A | Z | -.456 | -.456 | 0 | %100 |
| 39 | M52A | X | -.665 | -.665 | 0 | %100 |
| 40 | M52A | Z | -.384 | -.384 | 0 | %100 |
| 41 | M53 | X | -.187 | -.187 | 0 | %100 |
| 42 | M53 | Z | -.108 | -.108 | 0 | %100 |
| 43 | M54 | X | -.187 | -.187 | 0 | %100 |
| 44 | M54 | Z | -.108 | -.108 | 0 | %100 |
| 45 | M55 | X | -.342 | -.342 | 0 | %100 |
| 46 | M55 | Z | -.198 | -.198 | 0 | %100 |
| 47 | M58A | X | -.761 | -.761 | 0 | %100 |
| 48 | M58A | Z | -.439 | -.439 | 0 | %100 |
| 49 | M59A | X | -.19 | -.19 | 0 | %100 |
| 50 | M59A | Z | -.11 | -.11 | 0 | %100 |
| 51 | M63 | X | -1.027 | -1.027 | 0 | %100 |
| 52 | M63 | Z | -.593 | -.593 | 0 | %100 |
| 53 | M64 | X | -1.395 | -1.395 | 0 | %100 |
| 54 | M64 | Z | -.806 | -.806 | 0 | %100 |
| 55 | M66 | X | -1.47 | -1.47 | 0 | %100 |
| 56 | M66 | Z | -.848 | -.848 | 0 | %100 |
| 57 | M68 | X | -1.027 | -1.027 | 0 | %100 |

Member Distributed Loads (BLC 75 : Structure Wm (300 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | -593 | -593 | 0 %100 |
| 59 | M69 | X | -349 | -349 | 0 %100 |
| 60 | M69 | Z | -201 | -201 | 0 %100 |
| 61 | M71 | X | -367 | -367 | 0 %100 |
| 62 | M71 | Z | -212 | -212 | 0 %100 |
| 63 | M76A | X | 0 | 0 | 0 %100 |
| 64 | M76A | Z | 0 | 0 | 0 %100 |
| 65 | M77A | X | -746 | -746 | 0 %100 |
| 66 | M77A | Z | -431 | -431 | 0 %100 |
| 67 | M78 | X | -746 | -746 | 0 %100 |
| 68 | M78 | Z | -431 | -431 | 0 %100 |
| 69 | M79A | X | -1.37 | -1.37 | 0 %100 |
| 70 | M79A | Z | -791 | -791 | 0 %100 |
| 71 | M82 | X | -.19 | -.19 | 0 %100 |
| 72 | M82 | Z | -.11 | -.11 | 0 %100 |
| 73 | M83A | X | -.19 | -.19 | 0 %100 |
| 74 | M83A | Z | -.11 | -.11 | 0 %100 |
| 75 | M87 | X | 0 | 0 | 0 %100 |
| 76 | M87 | Z | 0 | 0 | 0 %100 |
| 77 | M88A | X | -349 | -349 | 0 %100 |
| 78 | M88A | Z | -201 | -201 | 0 %100 |
| 79 | M90 | X | -367 | -367 | 0 %100 |
| 80 | M90 | Z | -212 | -212 | 0 %100 |
| 81 | M92A | X | 0 | 0 | 0 %100 |
| 82 | M92A | Z | 0 | 0 | 0 %100 |
| 83 | M93 | X | -349 | -349 | 0 %100 |
| 84 | M93 | Z | -201 | -201 | 0 %100 |
| 85 | M95 | X | -367 | -367 | 0 %100 |
| 86 | M95 | Z | -212 | -212 | 0 %100 |
| 87 | M84B | X | -136 | -136 | 0 %100 |
| 88 | M84B | Z | -.078 | -.078 | 0 %100 |
| 89 | M89A | X | -136 | -136 | 0 %100 |
| 90 | M89A | Z | -.078 | -.078 | 0 %100 |
| 91 | M94A | X | -.542 | -.542 | 0 %100 |
| 92 | M94A | Z | -.313 | -.313 | 0 %100 |
| 93 | MP3C | X | -.542 | -.542 | 0 %100 |
| 94 | MP3C | Z | -.313 | -.313 | 0 %100 |
| 95 | MP4C | X | -.542 | -.542 | 0 %100 |
| 96 | MP4C | Z | -.313 | -.313 | 0 %100 |
| 97 | MP2C | X | -.542 | -.542 | 0 %100 |
| 98 | MP2C | Z | -.313 | -.313 | 0 %100 |
| 99 | MP1C | X | -.542 | -.542 | 0 %100 |
| 100 | MP1C | Z | -.313 | -.313 | 0 %100 |
| 101 | MP3B | X | -.542 | -.542 | 0 %100 |
| 102 | MP3B | Z | -.313 | -.313 | 0 %100 |
| 103 | MP4B | X | -.542 | -.542 | 0 %100 |
| 104 | MP4B | Z | -.313 | -.313 | 0 %100 |
| 105 | MP2B | X | -.542 | -.542 | 0 %100 |
| 106 | MP2B | Z | -.313 | -.313 | 0 %100 |
| 107 | MP1B | X | -.542 | -.542 | 0 %100 |
| 108 | MP1B | Z | -.313 | -.313 | 0 %100 |
| 109 | M109 | X | -.156 | -.156 | 0 %100 |
| 110 | M109 | Z | -.09 | -.09 | 0 %100 |
| 111 | M112 | X | -.156 | -.156 | 0 %100 |
| 112 | M112 | Z | -.09 | -.09 | 0 %100 |
| 113 | M115 | X | -.625 | -.625 | 0 %100 |
| 114 | M115 | Z | -.361 | -.361 | 0 %100 |

Member Distributed Loads (BLC 76 : Structure Wm (330 Deg))

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 1 | M1 | X | -342 | -342 | 0 %100 |
| 2 | M1 | Z | -592 | -592 | 0 %100 |
| 3 | M4 | X | -128 | -128 | 0 %100 |
| 4 | M4 | Z | -222 | -222 | 0 %100 |
| 5 | M10 | X | -323 | -323 | 0 %100 |
| 6 | M10 | Z | -56 | -56 | 0 %100 |
| 7 | MP3A | X | -313 | -313 | 0 %100 |
| 8 | MP3A | Z | -542 | -542 | 0 %100 |
| 9 | MP4A | X | -313 | -313 | 0 %100 |
| 10 | MP4A | Z | -542 | -542 | 0 %100 |
| 11 | MP2A | X | -313 | -313 | 0 %100 |
| 12 | MP2A | Z | -542 | -542 | 0 %100 |
| 13 | MP1A | X | -313 | -313 | 0 %100 |
| 14 | MP1A | Z | -542 | -542 | 0 %100 |
| 15 | M43 | X | -323 | -323 | 0 %100 |
| 16 | M43 | Z | -56 | -56 | 0 %100 |
| 17 | M46 | X | -593 | -593 | 0 %100 |
| 18 | M46 | Z | -1.027 | -1.027 | 0 %100 |
| 19 | M51B | X | 0 | 0 | 0 %100 |
| 20 | M51B | Z | 0 | 0 | 0 %100 |
| 21 | M52B | X | -329 | -329 | 0 %100 |
| 22 | M52B | Z | -57 | -57 | 0 %100 |
| 23 | M76 | X | -198 | -198 | 0 %100 |
| 24 | M76 | Z | -342 | -342 | 0 %100 |
| 25 | M77 | X | 0 | 0 | 0 %100 |
| 26 | M77 | Z | 0 | 0 | 0 %100 |
| 27 | M80 | X | 0 | 0 | 0 %100 |
| 28 | M80 | Z | 0 | 0 | 0 %100 |
| 29 | M84 | X | -198 | -198 | 0 %100 |
| 30 | M84 | Z | -342 | -342 | 0 %100 |
| 31 | M85 | X | -604 | -604 | 0 %100 |
| 32 | M85 | Z | -1.046 | -1.046 | 0 %100 |
| 33 | M91 | X | -636 | -636 | 0 %100 |
| 34 | M91 | Z | -1.102 | -1.102 | 0 %100 |
| 35 | M34 | X | 0 | 0 | 0 %100 |
| 36 | M34 | Z | 0 | 0 | 0 %100 |
| 37 | M43A | X | -342 | -342 | 0 %100 |
| 38 | M43A | Z | -592 | -592 | 0 %100 |
| 39 | M52A | X | -512 | -512 | 0 %100 |
| 40 | M52A | Z | -887 | -887 | 0 %100 |
| 41 | M53 | X | 0 | 0 | 0 %100 |
| 42 | M53 | Z | 0 | 0 | 0 %100 |
| 43 | M54 | X | 0 | 0 | 0 %100 |
| 44 | M54 | Z | 0 | 0 | 0 %100 |
| 45 | M55 | X | 0 | 0 | 0 %100 |
| 46 | M55 | Z | 0 | 0 | 0 %100 |
| 47 | M58A | X | -329 | -329 | 0 %100 |
| 48 | M58A | Z | -57 | -57 | 0 %100 |
| 49 | M59A | X | -329 | -329 | 0 %100 |
| 50 | M59A | Z | -57 | -57 | 0 %100 |
| 51 | M63 | X | -791 | -791 | 0 %100 |
| 52 | M63 | Z | -1.37 | -1.37 | 0 %100 |
| 53 | M64 | X | -604 | -604 | 0 %100 |
| 54 | M64 | Z | -1.046 | -1.046 | 0 %100 |
| 55 | M66 | X | -636 | -636 | 0 %100 |
| 56 | M66 | Z | -1.102 | -1.102 | 0 %100 |
| 57 | M68 | X | -791 | -791 | 0 %100 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Member Distributed Loads (BLC 76 : Structure Wm (330 Deg)) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k] | Start Location[ft,%] | End Location[ft,%] |
|--------------|-----------|------------------------------|--------------------------|----------------------|--------------------|
| 58 | M68 | Z | -1.37 | -1.37 | 0 %100 |
| 59 | M69 | X | -604 | -604 | 0 %100 |
| 60 | M69 | Z | -1.046 | -1.046 | 0 %100 |
| 61 | M71 | X | -636 | -636 | 0 %100 |
| 62 | M71 | Z | -1.102 | -1.102 | 0 %100 |
| 63 | M76A | X | -128 | -128 | 0 %100 |
| 64 | M76A | Z | -222 | -222 | 0 %100 |
| 65 | M77A | X | -323 | -323 | 0 %100 |
| 66 | M77A | Z | -56 | -56 | 0 %100 |
| 67 | M78 | X | -323 | -323 | 0 %100 |
| 68 | M78 | Z | -56 | -56 | 0 %100 |
| 69 | M79A | X | -593 | -593 | 0 %100 |
| 70 | M79A | Z | -1.027 | -1.027 | 0 %100 |
| 71 | M82 | X | -329 | -329 | 0 %100 |
| 72 | M82 | Z | -57 | -57 | 0 %100 |
| 73 | M83A | X | 0 | 0 | 0 %100 |
| 74 | M83A | Z | 0 | 0 | 0 %100 |
| 75 | M87 | X | -198 | -198 | 0 %100 |
| 76 | M87 | Z | -342 | -342 | 0 %100 |
| 77 | M88A | X | -604 | -604 | 0 %100 |
| 78 | M88A | Z | -1.046 | -1.046 | 0 %100 |
| 79 | M90 | X | -636 | -636 | 0 %100 |
| 80 | M90 | Z | -1.102 | -1.102 | 0 %100 |
| 81 | M92A | X | -198 | -198 | 0 %100 |
| 82 | M92A | Z | -342 | -342 | 0 %100 |
| 83 | M93 | X | 0 | 0 | 0 %100 |
| 84 | M93 | Z | 0 | 0 | 0 %100 |
| 85 | M95 | X | 0 | 0 | 0 %100 |
| 86 | M95 | Z | 0 | 0 | 0 %100 |
| 87 | M84B | X | -235 | -235 | 0 %100 |
| 88 | M84B | Z | -407 | -407 | 0 %100 |
| 89 | M89A | X | 0 | 0 | 0 %100 |
| 90 | M89A | Z | 0 | 0 | 0 %100 |
| 91 | M94A | X | -235 | -235 | 0 %100 |
| 92 | M94A | Z | -407 | -407 | 0 %100 |
| 93 | MP3C | X | -313 | -313 | 0 %100 |
| 94 | MP3C | Z | -542 | -542 | 0 %100 |
| 95 | MP4C | X | -313 | -313 | 0 %100 |
| 96 | MP4C | Z | -542 | -542 | 0 %100 |
| 97 | MP2C | X | -313 | -313 | 0 %100 |
| 98 | MP2C | Z | -542 | -542 | 0 %100 |
| 99 | MP1C | X | -313 | -313 | 0 %100 |
| 100 | MP1C | Z | -542 | -542 | 0 %100 |
| 101 | MP3B | X | -313 | -313 | 0 %100 |
| 102 | MP3B | Z | -542 | -542 | 0 %100 |
| 103 | MP4B | X | -313 | -313 | 0 %100 |
| 104 | MP4B | Z | -542 | -542 | 0 %100 |
| 105 | MP2B | X | -313 | -313 | 0 %100 |
| 106 | MP2B | Z | -542 | -542 | 0 %100 |
| 107 | MP1B | X | -313 | -313 | 0 %100 |
| 108 | MP1B | Z | -542 | -542 | 0 %100 |
| 109 | M109 | X | -271 | -271 | 0 %100 |
| 110 | M109 | Z | -469 | -469 | 0 %100 |
| 111 | M112 | X | 0 | 0 | 0 %100 |
| 112 | M112 | Z | 0 | 0 | 0 %100 |
| 113 | M115 | X | -271 | -271 | 0 %100 |
| 114 | M115 | Z | -469 | -469 | 0 %100 |

Member Distributed Loads (BLC 81 : BLC 39 Transient Area Loads)

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] |
|----|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 1 | M51B | Y | -1.665 | -4.227 | 0 | .832 |
| 2 | M51B | Y | -4.227 | -6.9 | .832 | 1.665 |
| 3 | M51B | Y | -6.9 | -8.189 | 1.665 | 2.497 |
| 4 | M51B | Y | -8.189 | -6.545 | 2.497 | 3.329 |
| 5 | M51B | Y | -6.545 | -3.463 | 3.329 | 4.162 |
| 6 | M52B | Y | -3.47 | -6.578 | 0 | .832 |
| 7 | M52B | Y | -6.578 | -8.256 | .832 | 1.665 |
| 8 | M52B | Y | -8.256 | -7.042 | 1.665 | 2.497 |
| 9 | M52B | Y | -7.042 | -4.428 | 2.497 | 3.329 |
| 10 | M52B | Y | -4.428 | -1.879 | 3.329 | 4.162 |
| 11 | M58A | Y | -1.665 | -4.227 | 0 | .832 |
| 12 | M58A | Y | -4.227 | -6.9 | .832 | 1.665 |
| 13 | M58A | Y | -6.9 | -8.189 | 1.665 | 2.497 |
| 14 | M58A | Y | -8.189 | -6.545 | 2.497 | 3.329 |
| 15 | M58A | Y | -6.545 | -3.463 | 3.329 | 4.162 |
| 16 | M59A | Y | -3.47 | -6.578 | 0 | .832 |
| 17 | M59A | Y | -6.578 | -8.256 | .832 | 1.665 |
| 18 | M59A | Y | -8.256 | -7.042 | 1.665 | 2.497 |
| 19 | M59A | Y | -7.042 | -4.428 | 2.497 | 3.329 |
| 20 | M59A | Y | -4.428 | -1.879 | 3.329 | 4.162 |
| 21 | M82 | Y | -1.883 | -4.428 | 0 | .832 |
| 22 | M82 | Y | -4.428 | -7.048 | .832 | 1.665 |
| 23 | M82 | Y | -7.048 | -8.261 | 1.665 | 2.497 |
| 24 | M82 | Y | -8.261 | -6.572 | 2.497 | 3.329 |
| 25 | M82 | Y | -6.572 | -3.462 | 3.329 | 4.162 |
| 26 | M83A | Y | -3.463 | -6.544 | 0 | .832 |
| 27 | M83A | Y | -6.544 | -8.187 | .832 | 1.665 |
| 28 | M83A | Y | -8.187 | -6.899 | 1.665 | 2.497 |
| 29 | M83A | Y | -6.899 | -4.227 | 2.497 | 3.329 |
| 30 | M83A | Y | -4.227 | -1.664 | 3.329 | 4.162 |

Member Distributed Loads (BLC 82 : BLC 40 Transient Area Loads)

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] |
|----|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 1 | M51B | Y | -3.229 | -8.195 | 0 | .832 |
| 2 | M51B | Y | -8.195 | -13.378 | .832 | 1.665 |
| 3 | M51B | Y | -13.378 | -15.877 | 1.665 | 2.497 |
| 4 | M51B | Y | -15.877 | -12.689 | 2.497 | 3.329 |
| 5 | M51B | Y | -12.689 | -6.714 | 3.329 | 4.162 |
| 6 | M52B | Y | -6.727 | -12.754 | 0 | .832 |
| 7 | M52B | Y | -12.754 | -16.008 | .832 | 1.665 |
| 8 | M52B | Y | -16.008 | -13.653 | 1.665 | 2.497 |
| 9 | M52B | Y | -13.653 | -8.586 | 2.497 | 3.329 |
| 10 | M52B | Y | -8.586 | -3.644 | 3.329 | 4.162 |
| 11 | M58A | Y | -3.229 | -8.195 | 0 | .832 |
| 12 | M58A | Y | -8.195 | -13.378 | .832 | 1.665 |
| 13 | M58A | Y | -13.378 | -15.877 | 1.665 | 2.497 |
| 14 | M58A | Y | -15.877 | -12.689 | 2.497 | 3.329 |
| 15 | M58A | Y | -12.689 | -6.714 | 3.329 | 4.162 |
| 16 | M59A | Y | -6.727 | -12.754 | 0 | .832 |
| 17 | M59A | Y | -12.754 | -16.008 | .832 | 1.665 |
| 18 | M59A | Y | -16.008 | -13.653 | 1.665 | 2.497 |
| 19 | M59A | Y | -13.653 | -8.586 | 2.497 | 3.329 |
| 20 | M59A | Y | -8.586 | -3.644 | 3.329 | 4.162 |
| 21 | M82 | Y | -3.65 | -8.585 | 0 | .832 |
| 22 | M82 | Y | -8.585 | -13.664 | .832 | 1.665 |
| 23 | M82 | Y | -13.664 | -16.017 | 1.665 | 2.497 |

Member Distributed Loads (BLC 82 : BLC 40 Transient Area Loads) (Continued)

| | Member Label | Direction | Start Magnitude[lb/ft.F,ksf] | End Magnitude[lb/ft.F,k..] | Start Location[ft.%] | End Location[ft.%] |
|----|--------------|-----------|------------------------------|----------------------------|----------------------|--------------------|
| 24 | M82 | Y | -16.017 | -12.742 | 2.497 | 3.329 |
| 25 | M82 | Y | -12.742 | -6.713 | 3.329 | 4.162 |
| 26 | M83A | Y | -6.714 | -12.689 | 0 | .832 |
| 27 | M83A | Y | -12.689 | -15.874 | .832 | 1.665 |
| 28 | M83A | Y | -15.874 | -13.377 | 1.665 | 2.497 |
| 29 | M83A | Y | -13.377 | -8.196 | 2.497 | 3.329 |
| 30 | M83A | Y | -8.196 | -3.225 | 3.329 | 4.162 |

Member Area Loads (BLC 39 : Structure D)

| | Joint A | Joint B | Joint C | Joint D | Direction | Distribution | Magnitude[ksf] |
|---|---------|---------|---------|---------|-----------|--------------|----------------|
| 1 | N6 | N87C | N87B | N7 | Y | Two Way | -.005 |
| 2 | N86 | N109 | N111 | N87 | Y | Two Way | -.005 |
| 3 | N115 | N138 | N140 | N116 | Y | Two Way | -.005 |

Member Area Loads (BLC 40 : Structure Di)

| | Joint A | Joint B | Joint C | Joint D | Direction | Distribution | Magnitude[ksf] |
|---|---------|---------|---------|---------|-----------|--------------|----------------|
| 1 | N6 | N87C | N87B | N7 | Y | Two Way | -.01 |
| 2 | N86 | N109 | N111 | N87 | Y | Two Way | -.01 |
| 3 | N115 | N138 | N140 | N116 | Y | Two Way | -.01 |

Envelope Joint Reactions

| | Joint | | X [lb] | LC | Y [lb] | LC | Z [lb] | LC | MX [k-ft] | LC | MY [k-ft] | LC | MZ [k-ft] | LC |
|---|---------|-----|-----------|----|----------|----|------------|----|-----------|----|-----------|----|-----------|----|
| 1 | N3 | max | 1031.702 | 10 | 2574.798 | 13 | 3234.36 | 1 | 5.973 | 1 | 1.535 | 4 | .484 | 4 |
| 2 | | min | -1044.919 | 4 | -137.746 | 7 | -3387.36 | 7 | -2.157 | 7 | -1.549 | 10 | -.45 | 10 |
| 3 | N84A | max | 2856.115 | 9 | 2632.596 | 21 | 1564.768 | 2 | .972 | 3 | 1.586 | 12 | 1.765 | 3 |
| 4 | | min | -2952.628 | 3 | -100.199 | 3 | -1473.4... | 8 | -2.947 | 9 | -1.582 | 6 | -5.211 | 9 |
| 5 | N113 | max | 2932.54 | 11 | 2679.311 | 17 | 1840.258 | 12 | 1.077 | 11 | 1.705 | 8 | 5.303 | 5 |
| 6 | | min | -2823.94 | 5 | -118.961 | 11 | -1767.5... | 6 | -3.143 | 5 | -1.737 | 2 | -1.796 | 11 |
| 7 | Totals: | max | 6448.943 | 10 | 7069.142 | 23 | 6448.799 | 1 | | | | | | |
| 8 | | min | -6448.944 | 4 | 3030.598 | 5 | -6448.7... | 7 | | | | | | |

Envelope AISC 15th(360-16): LRFD Steel Code Checks

| | Member | Shape | Code Check | Loc[ft] | LC | Shear C... | Loc[ft] | Dir | LC | phi*Pn... | phi*... | phi*... | phi...Cb | Eqn |
|----|--------|------------|------------|---------|----|------------|---------|-----|----|-----------|---------|---------|------------|-------|
| 1 | MP2C | PIPE 2.0 | .745 | 4.943 | 6 | .122 | 3.453 | | 8 | 19360... | 321... | 1.872 | 1.8...1... | H1-1b |
| 2 | MP2A | PIPE 2.0 | .727 | 4.943 | 10 | .127 | 3.453 | | 6 | 19360... | 321... | 1.872 | 1.8...1.6 | H1-1b |
| 3 | MP2B | PIPE 2.0 | .708 | 4.943 | 1 | .140 | 1.286 | | 4 | 19360... | 321... | 1.872 | 1.8...1... | H1-1b |
| 4 | MP3A | PIPE 2.0 | .630 | 4.943 | 5 | .168 | 4.943 | | 7 | 19360... | 321... | 1.872 | 1.8...1... | H1-1b |
| 5 | MP3C | PIPE 2.0 | .611 | 4.943 | 1 | .159 | 4.943 | | 3 | 19360... | 321... | 1.872 | 1.8...1... | H1-1b |
| 6 | MP3B | PIPE 2.0 | .609 | 4.943 | 9 | .163 | 4.943 | | 11 | 19360... | 321... | 1.872 | 1.8...1... | H1-1b |
| 7 | M76A | HSS4X4X3 | .507 | 0 | 5 | .122 | 0 | y | 30 | 95681... | 106... | 12... | 12...2... | H1-1b |
| 8 | M52A | HSS4X4X3 | .505 | 0 | 9 | .109 | 0 | y | 43 | 95681... | 106... | 12... | 12...2... | H1-1b |
| 9 | MP1C | PIPE 2.0 | .498 | 4.943 | 5 | .203 | 1.286 | | 4 | 19360... | 321... | 1.872 | 1.8...1... | H1-1b |
| 10 | M4 | HSS4X4X3 | .489 | 0 | 1 | .098 | 0 | y | 15 | 95681... | 106... | 12... | 12...2... | H1-1b |
| 11 | MP1A | PIPE 2.0 | .483 | 4.943 | 9 | .204 | 1.286 | | 8 | 19360... | 321... | 1.872 | 1.8...1... | H1-1b |
| 12 | MP1B | PIPE 2.0 | .480 | 4.943 | 1 | .199 | 1.286 | | 6 | 19360... | 321... | 1.872 | 1.8...1... | H1-1b |
| 13 | MP4A | PIPE 2.0 | .406 | 4.943 | 5 | .205 | 1.286 | | 6 | 19360... | 321... | 1.872 | 1.8...1... | H1-1b |
| 14 | M89A | PIPE 2.0 | .397 | .521 | 5 | .145 | .651 | | 9 | 6295.4... | 321... | 1.872 | 1.8...2... | H1-1b |
| 15 | MP4C | PIPE 2.0 | .393 | 4.943 | 1 | .193 | 1.286 | | 2 | 19360... | 321... | 1.872 | 1.8...1... | H1-1b |
| 16 | MP4B | PIPE 2.0 | .390 | 4.943 | 9 | .195 | 1.286 | | 10 | 19360... | 321... | 1.872 | 1.8...1... | H1-1b |
| 17 | M84B | PIPE 2.0 | .388 | 4.297 | 8 | .153 | .651 | | 7 | 6295.4... | 321... | 1.872 | 1.8...2... | H1-1b |
| 18 | M94A | PIPE 2.0 | .380 | .521 | 1 | .154 | .651 | | 5 | 6295.4... | 321... | 1.872 | 1.8...2... | H1-1b |
| 19 | M115 | L2.5x2.5x6 | .363 | 0 | 7 | .154 | 0 | z | 8 | 54026... | 560... | 1.512 | 3.5...1... | H2-1 |



Company :
 Designer :
 Job Number :
 Model Name :

May 7, 2021
 11:29 AM
 Checked By: _____

Envelope AISC 15th(360-16): LRFD Steel Code Checks (Continued)


| Member | Shape | Code Check | Loc[ft] | LC | Shear C... | Loc[ft] | Dir | LC | phi*Pn... | phi*... | phi*... | phi...Cb | Eqn |
|--------|-------|------------|---------|--------|------------|---------|--------|----|-----------|-----------|---------|-----------------|-------|
| 20 | M112 | L2.5x2.5x6 | .346 | 0 | 11 | .154 | 0 | z | 6 | 54026... | 560... | 1.5123.5...1... | H2-1 |
| 21 | M109 | L2.5x2.5x6 | .330 | 0 | 3 | .152 | .121 | z | 4 | 54026... | 560... | 1.5123.5...1... | H2-1 |
| 22 | M1 | PIPE 3.0 | .283 | 10.026 | 4 | .099 | 11.719 | | 7 | 28250... | 652... | 5.7495.7...1... | H1-1b |
| 23 | M34 | PIPE 3.0 | .281 | 10.026 | 12 | .093 | 11.719 | | 3 | 28250... | 652... | 5.7495.7...1... | H1-1b |
| 24 | M43A | PIPE 3.0 | .278 | 10.026 | 8 | .096 | 11.719 | | 11 | 28250... | 652... | 5.7495.7...1... | H1-1b |
| 25 | M88A | PL3/8x6 | .271 | .167 | 12 | .283 | 0 | y | 18 | 71601... | 729... | .57 9.1...1... | H1-1b |
| 26 | M77 | PL3/8x6 | .266 | .167 | 8 | .275 | 0 | y | 14 | 71601... | 729... | .57 9.1...1... | H1-1b |
| 27 | M64 | PL3/8x6 | .264 | .167 | 4 | .276 | 0 | y | 22 | 71601... | 729... | .57 9.1...1... | H1-1b |
| 28 | M68 | PL3/8x6 | .261 | 0 | 3 | .183 | 0 | y | 24 | 70677... | 729... | .57 9.1...2... | H1-1b |
| 29 | M93 | PL3/8x6 | .256 | .167 | 10 | .270 | 0 | y | 16 | 71601... | 729... | .57 9.1...1... | H1-1b |
| 30 | M85 | PL3/8x6 | .256 | .167 | 6 | .263 | 0 | y | 24 | 71601... | 729... | .57 9.1...1... | H1-1b |
| 31 | M69 | PL3/8x6 | .253 | .167 | 2 | .270 | 0 | y | 20 | 71601... | 729... | .57 9.1...1... | H1-1b |
| 32 | M87 | PL3/8x6 | .249 | 0 | 8 | .238 | 0 | y | 10 | 70677... | 729... | .57 9.1...1... | H1-1b |
| 33 | M55 | PL1/2x6 | .244 | .516 | 2 | .241 | 0 | y | 6 | 66009... | 972... | 1.01212...1... | H1-1b |
| 34 | M79A | PL1/2x6 | .244 | .516 | 5 | .233 | 0 | y | 2 | 66009... | 972... | 1.01212...1... | H1-1b |
| 35 | M77A | HSS4X4X3 | .244 | 2.375 | 18 | .081 | .223 | z | 6 | 104414... | 106... | 12...12...1... | H1-1b |
| 36 | M63 | PL3/8x6 | .243 | 0 | 12 | .232 | 0 | y | 2 | 70677... | 729... | .57 9.1...1... | H1-1b |
| 37 | M46 | PL1/2x6 | .240 | .516 | 6 | .234 | 0 | y | 10 | 66009... | 972... | 1.01212...1... | H1-1b |
| 38 | M53 | HSS4X4X3 | .240 | 2.375 | 22 | .080 | .223 | z | 10 | 104414... | 106... | 12...12...1... | H1-1b |
| 39 | M10 | HSS4X4X3 | .236 | 2.375 | 14 | .078 | .223 | z | 2 | 104414... | 106... | 12...12...1... | H1-1b |
| 40 | M76 | PL3/8x6 | .235 | 0 | 4 | .240 | 0 | y | 6 | 70677... | 729... | .57 9.1...1... | H1-1b |
| 41 | M78 | HSS4X4X3 | .232 | 0 | 16 | .070 | 2.152 | z | 4 | 104414... | 106... | 12...12...1... | H1-1b |
| 42 | M54 | HSS4X4X3 | .230 | 0 | 20 | .067 | 0 | y | 18 | 104414... | 106... | 12...12...1... | H1-1b |
| 43 | M92A | PL3/8x6 | .228 | 0 | 4 | .186 | 0 | y | 20 | 70677... | 729... | .57 9.1...1... | H1-1b |
| 44 | M84 | PL3/8x6 | .224 | 0 | 12 | .178 | 0 | y | 16 | 70677... | 729... | .57 9.1...1... | H1-1b |
| 45 | M43 | HSS4X4X3 | .224 | 0 | 24 | .069 | 2.152 | z | 12 | 104414... | 106... | 12...12...1... | H1-1b |
| 46 | M58A | L2x2x3 | .213 | 4.162 | 10 | .014 | 0 | y | 13 | 9823.1... | 233... | .5581.0...1... | H2-1 |
| 47 | M83A | L2x2x3 | .213 | 0 | 5 | .013 | 4.162 | y | 13 | 9823.1... | 233... | .5581.0...1... | H2-1 |
| 48 | M82 | L2x2x3 | .212 | 4.162 | 6 | .014 | 0 | y | 21 | 9823.1... | 233... | .5581.0...1... | H2-1 |
| 49 | M52B | L2x2x3 | .209 | 0 | 12 | .014 | 4.162 | y | 21 | 9823.1... | 233... | .5581.0...1... | H2-1 |
| 50 | M51B | L2x2x3 | .206 | 4.162 | 2 | .014 | 0 | y | 17 | 9823.1... | 233... | .5581.0...1... | H2-1 |
| 51 | M59A | L2x2x3 | .202 | 0 | 8 | .014 | 4.162 | y | 17 | 9823.1... | 233... | .5581.0...1... | H2-1 |
| 52 | M95 | PL1/2x6 | .065 | .112 | 11 | .113 | 0 | y | 7 | 96757... | 972... | 1.01212...1... | H1-1b |
| 53 | M71 | PL1/2x6 | .065 | .112 | 3 | .111 | 0 | y | 11 | 96757... | 972... | 1.01212...1... | H1-1b |
| 54 | M91 | PL1/2x6 | .064 | .112 | 7 | .108 | 0 | y | 3 | 96757... | 972... | 1.01212...1... | H1-1b |
| 55 | M90 | PL1/2x6 | .061 | .112 | 5 | .098 | .112 | y | 9 | 96757... | 972... | 1.01212...1... | H1-1b |
| 56 | M80 | PL1/2x6 | .060 | .112 | 6 | .101 | .112 | y | 5 | 96757... | 972... | 1.01212...1... | H1-1b |
| 57 | M66 | PL1/2x6 | .055 | .112 | 2 | .096 | .112 | y | 1 | 96757... | 972... | 1.01212...1... | H1-1b |



I. Mount-to-Tower Connection Check

RISA Model Data

| Nodes (labeled per RISA) | Orientation (per graphic of typical platform) |
|-----------------------------|--|
| N3 | 270 |
| N84A | 30 |
| N113 | 150 |
| | |
| | |
| | |
| | |
| | |

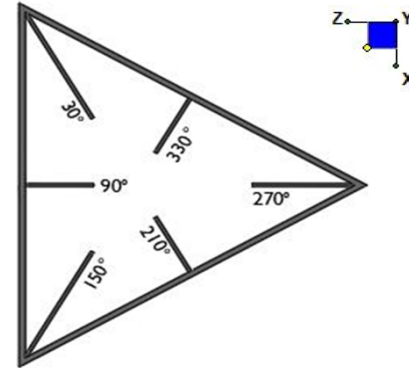

TYPICAL PLATFORM

Tower Connection Bolt Checks

Any moment resistance?:

Bolt Quantity per Reaction:

d_x (in) (Delta X of typ. bolt config. sketch) :

d_y (in) (Delta Y of typ. bolt config. sketch) :

Bolt Type:

Bolt Diameter (in):

Required Tensile Strength (kips):

Required Shear Strength (kips):


Tensile Strength / bolt (kips):

Shear Strength / bolt (kips):

Tensile Capacity Overall:

Shear Capacity Overall:

| |
|---------------|
| yes |
| 4 |
| 7 |
| 7 |
| A325N |
| 0.625 |
| 24.4 |
| 4.1 |
| 20.7 |
| 12.4 |
| 29.5%* |
| 8.2% |

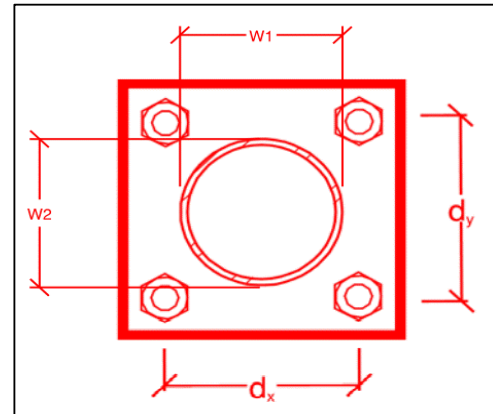

*Note: Tension reduction not required if tension or shear capacity < 30%

Tower Connection Plate and Weld Check

Connecting Standoff Member Shape:

Plate Width (in):

Plate Height (in):

W1 (in):

W2 (in):

Fy (ksi, plate):

t_{plate} (in):

Weld Size (1/16 in):

$\Phi \cdot R_n$ (kip/in):

Required Weld Strength (kip/in):

Plate Bending Capacity:

Weld Capacity:

| |
|--------------|
| Rect |
| 10 |
| 10 |
| 4 |
| 4 |
| 36 |
| 0.875 |
| 3 |
| 4.18 |
| 3.68 |
| 29.8% |
| 88.1% |

Max Plate Bending Strengths

| | |
|------------------------------------|------|
| $M_{u_{xx}}$ (kip-in) : | 18.3 |
| $\Phi \cdot M_{n_{xx}}$ (kip-in) : | 62.0 |
| $M_{u_{yy}}$ (kip-in) : | 0.2 |
| $\Phi \cdot M_{n_{yy}}$ (kip-in) : | 62.0 |

Mount Desktop – Post Modification Inspection (PMI) Report Requirements

Documents & Photos Required from Contractor – **Passing Mount Analysis**

Purpose – to provide Maser Consulting the proper documentation in order to complete the required Mount Desktop review of the Post Modification Inspection Report.

- Contractor is responsible for making certain the photos provided as noted below provide confirmation that the installation was completed in accordance with this Passing Mount Analysis.
- Contractor shall relay any data that can impact the performance of the mount, this includes safety issues.


















Base Requirements:

- Any special photos outside of the standard requirements will be indicated on the passing MA
- Verification that loading is as communicated in the Passing Mount Analysis. NOTE If loading is different than what is conveyed contact Maser Consulting immediately.
- Each photo should be time and date stamped
- Photos should be high resolution and submitted in a Zip File and should be organized in the file structure as depicted in Schedule A attached.
- Contractor shall ensure that the safety climb wire rope is supported and not adversely impacted by the install of the modification components. This may involve the install of wire rope guides, or other items to protect the wire rope.
- The photos in the file structure should be uploaded to <https://pmi.vzsmart.com> as depicted on the drawings


Photo Requirements:

- Base and “During Installation Photos”
 - Base pictures include
 - Photo of Gate Signs showing the tower owner, site name, and number
 - Photo of carrier shelter showing the carrier site name and number if available
 - Photos of the galvanizing compound and/or paint used (if applicable), clearly showing the label and name
 - “During Installation Photos if provided - must be placed only in this folder
- Photos taken at ground level
 - Overall tower structure before and after installation of the equipment modifications
 - Photos of the appropriate mount before and after installation of the modifications; if the mounts are at different rad elevations, pictures must be provided for all elevations that the modifications were installed
- Photos taken at Mount Elevation
 - Photos showing each individual sector before and also after installation of equipment.
 - These photos should also certify that the placement and geometry of the equipment on the mount is as depicted on the sketch and table in the mount analysis


Schedule A – Photo & Document File Structure

-  VzW Site Number / Name
 -  Base & “During Installation” Photos
 -  Pre-Installation Photos
 -  Alpha
 -  Beta
 -  Gamma
 -  Ground Level
 -  Tape Drop
 -  Post-Installation Photos
 -  Alpha
 -  Beta
 -  Gamma
 -  Ground Level
 -  Tape Drop
 -  Photos of climbing facility and safety climb – If Present
-  Certifications – Submission of this document including certifications
-  Specific Required Additional Photos

Plan View

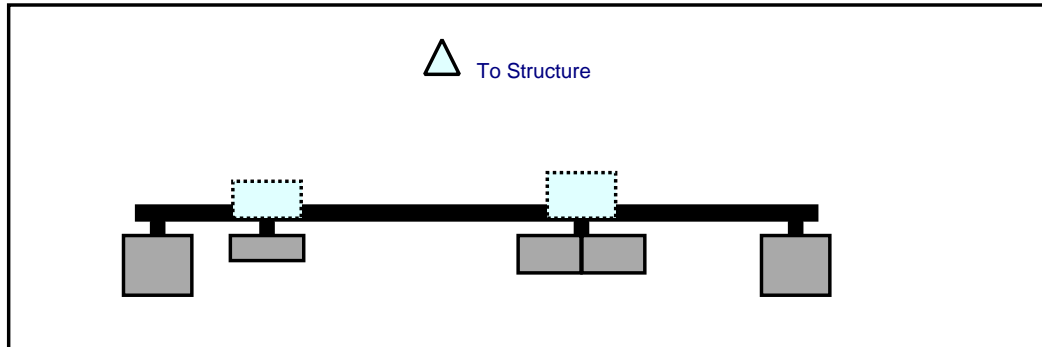


Front View
Looking at Structure

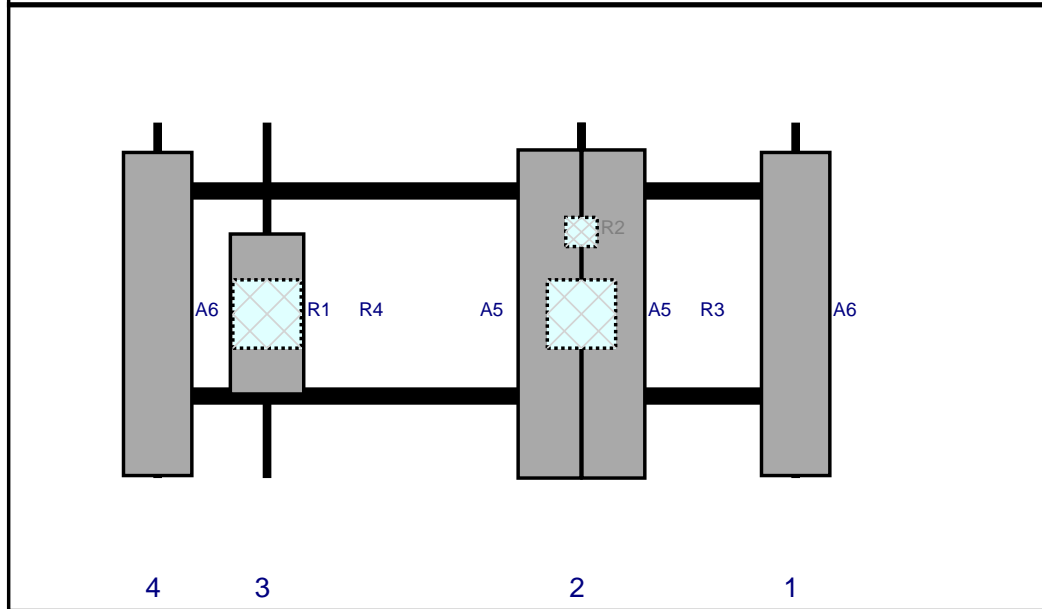


| Ref# | Model | Height (in) | Width (in) | H Dist Frm L. | Pipe # | Pipe Pos V | Ant Pos | C. Ant Frm T. | Ant H Off | Status | Validation |
|------|--------------------------------|-------------|------------|---------------|--------|------------|---------|---------------|-----------|----------|------------|
| A6 | LPA-80063/6CF | 70.9 | 15 | 145 | 1 | a | Front | 42 | 0 | Retained | 03/23/2021 |
| A5 | JAHH-65B-R3B | 72 | 13.8 | 98 | 2 | a | Front | 42 | 7 | Retained | 03/23/2021 |
| A5 | JAHH-65B-R3B | 72 | 13.8 | 98 | 2 | b | Front | 42 | -7 | Retained | 03/23/2021 |
| R2 | CBC78T-DS-43 | 6.4 | 6.9 | 98 | 2 | a | Behind | 24 | 0 | Added | |
| R3 | B2/B66A RRH-BR049 (RFV01U-D1A) | 15 | 15 | 98 | 2 | a | Behind | 42 | 0 | Added | |
| R1 | MT6407-77A | 35.1 | 16.1 | 29 | 3 | a | Front | 42 | 0 | Added | |
| R4 | B5/B13 RRH-BR04C (RFV01U-D2A) | 15 | 15 | 29 | 3 | a | Behind | 42 | 0 | Added | |
| A6 | LPA-80063/6CF | 70.9 | 15 | 5 | 4 | a | Front | 42 | 0 | Retained | 03/23/2021 |

Plan View

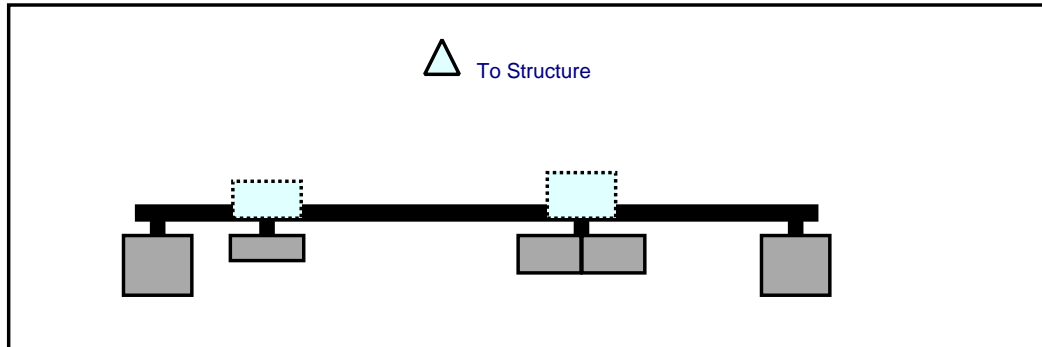


Front View
Looking at Structure

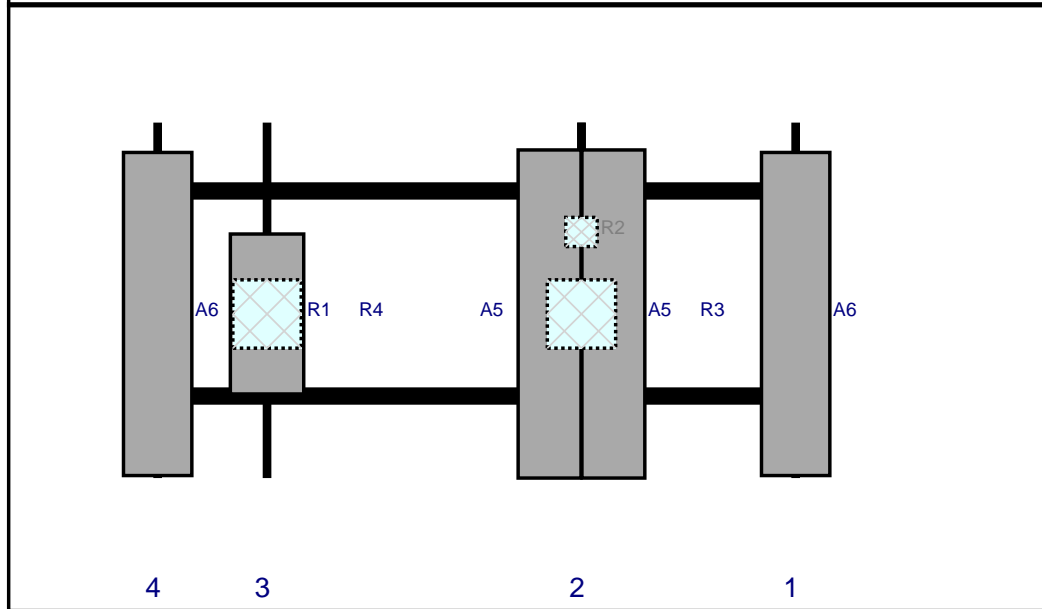


| Ref# | Model | Height (in) | Width (in) | H Dist Frm L. | Pipe # | Pipe Pos V | Ant Pos | C. Ant Frm T. | Ant H Off | Status | Validation |
|------|--------------------------------|-------------|------------|---------------|--------|------------|---------|---------------|-----------|----------|------------|
| A6 | LPA-80063/6CF | 70.9 | 15 | 145 | 1 | a | Front | 42 | 0 | Retained | 03/23/2021 |
| A5 | JAHH-65B-R3B | 72 | 13.8 | 98 | 2 | a | Front | 42 | 7 | Retained | 03/23/2021 |
| A5 | JAHH-65B-R3B | 72 | 13.8 | 98 | 2 | b | Front | 42 | -7 | Retained | 03/23/2021 |
| R2 | CBC78T-DS-43 | 6.4 | 6.9 | 98 | 2 | a | Behind | 24 | 0 | Added | |
| R3 | B2/B66A RRH-BR049 (RFV01U-D1A) | 15 | 15 | 98 | 2 | a | Behind | 42 | 0 | Added | |
| R1 | MT6407-77A | 35.1 | 16.1 | 29 | 3 | a | Front | 42 | 0 | Added | |
| R4 | B5/B13 RRH-BR04C (RFV01U-D2A) | 15 | 15 | 29 | 3 | a | Behind | 42 | 0 | Added | |
| A6 | LPA-80063/6CF | 70.9 | 15 | 5 | 4 | a | Front | 42 | 0 | Retained | 03/23/2021 |

Plan View

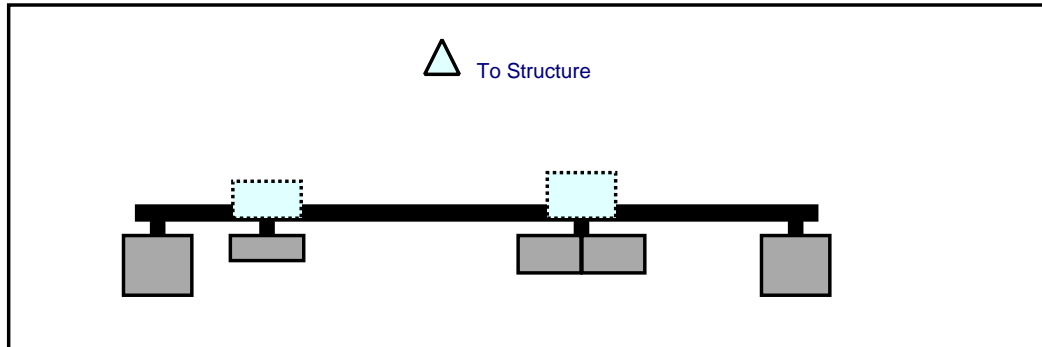

Front View
Looking at Structure

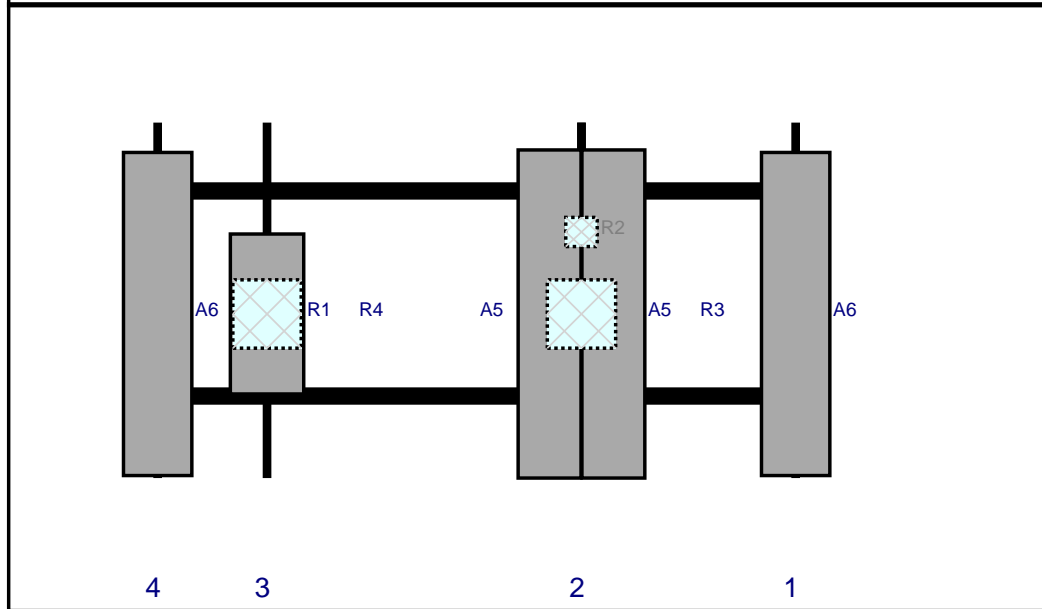

| Ref# | Model | Height (in) | Width (in) | H Dist Frm L. | Pipe # | Pipe Pos V | Ant Pos | C. Ant Frm T. | Ant H Off | Status | Validation |
|------|--------------------------------|-------------|------------|---------------|--------|------------|---------|---------------|-----------|----------|------------|
| A6 | LPA-80063/6CF | 70.9 | 15 | 145 | 1 | a | Front | 42 | 0 | Retained | 03/23/2021 |
| A5 | JAHH-65B-R3B | 72 | 13.8 | 98 | 2 | a | Front | 42 | 7 | Retained | 03/23/2021 |
| A5 | JAHH-65B-R3B | 72 | 13.8 | 98 | 2 | b | Front | 42 | -7 | Retained | 03/23/2021 |
| R2 | CBC78T-DS-43 | 6.4 | 6.9 | 98 | 2 | a | Behind | 24 | 0 | Added | |
| R3 | B2/B66A RRH-BR049 (RFV01U-D1A) | 15 | 15 | 98 | 2 | a | Behind | 42 | 0 | Added | |
| R1 | MT6407-77A | 35.1 | 16.1 | 29 | 3 | a | Front | 42 | 0 | Added | |
| R4 | B5/B13 RRH-BR04C (RFV01U-D2A) | 15 | 15 | 29 | 3 | a | Behind | 42 | 0 | Added | |
| A6 | LPA-80063/6CF | 70.9 | 15 | 5 | 4 | a | Front | 42 | 0 | Retained | 03/23/2021 |

Maser Consulting Connecticut

Subject

TIA-222-H Usage

Site Information

Site ID: 468396-VZW / OXFORD NORTH CT
Site Name: OXFORD NORTH CT
Carrier Name: Verizon Wireless
Address: 691 Oxford Rd.
Oxford, Connecticut 06478
New Haven County
Latitude: 41.447086°
Longitude: -73.152308°

Structure Information

Tower Type: 150-Ft Monopole
Mount Type: 12.50-Ft Platform Mount

To Whom It May Concern,

We respectfully submit the above referenced Antenna Mount Structural Analysis report in conformance with ANSI/TIA-222-H, Structural Standard for Antenna Supporting Structures and Antennas and Small Wind Turbine Support Structures.

The 2018 International Building Code states that, in Section 3108, telecommunication towers shall be designed and constructed in accordance with the provisions of TIA-222. TIA-222-H is the latest revision of the TIA-222 Standard, effective as of January 01, 2018.

As with all ANSI standards and engineering best practice is to apply the most current revision of the standard. This ensures the engineer is applying all updates. As an example, the TIA-222-H Standard includes updates to bring it in line with the latest AISC and ACI standards and it also incorporates the latest wind speed maps by ASCE 7 based on updated studies of the wind data.

The TIA-222-H standard clarifies these specific requirements for the antenna mount analysis such as modeling methods, seismic analysis, 30-degree increment wind directions and maintenance loading. Therefore, it is our opinion that TIA-222-H is the most appropriate standard for antenna mount structural analysis and is acceptable for use at this site to ensure the engineer is taking into account the most current engineering standard available.

Sincerely,

Taqi Khawaja, PE
Technical Manager

Exhibit F

Power Density/RF Emissions Report

Site Name: **OXFORD NORTH CT**
 Cumulative Power Density

| Operator | Operating Frequency | Number of Trans. | ERP Per Trans. | Total ERP | Distance to Target | Calculated Power Density |
|--------------|---------------------|------------------|----------------|-----------|--------------------|--------------------------|
| | (MHz) | | (watts) | (watts) | (feet) | (mW/cm ²) |
| VZW 700 | 751 | 4 | 648 | 2593 | 147 | 0.0043 |
| VZW CDMA | 877.26 | 2 | 498 | 995 | 147 | 0.0017 |
| VZW Cellular | 874 | 4 | 742 | 2969 | 147 | 0.0049 |
| VZW PCS | 1975 | 4 | 1561 | 6243 | 147 | 0.0104 |
| VZW AWS | 2120 | 4 | 1618 | 6474 | 147 | 0.0108 |
| VZW CBAND | 3730.08 | 4 | 6531 | 26125 | 147 | 0.0435 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Percentage of Maximum Permissible Exposure

*Guidelines adopted by the FCC on August 1, 1996, 47 CFR Part 1 based on NCRP Report 86, 1986 and generally on ANSI
 **Calculation includes a -10 dB Off Beam Antenna Pattern Adjustment pursuant to Attachments B and C of the Siting Council

MHz = Megahertz
 mW/cm² = milliwatts per square centimeter
 ERP = Effective Radiated Power

Absolute worst case maximum values used.


| Maximum Permissible Exposure* | Fraction of MPE |
|-------------------------------|-----------------|
| (mW/cm ²) | (%) |
| 0.5007 | 0.86% |
| 0.5848 | 0.28% |
| 0.5827 | 0.85% |
| 1.0000 | 1.04% |
| 1.0000 | 1.08% |
| 1.0000 | 4.35% |
| | |
| | |
| | |
| | |
| | 8.46% |

/IEEE C95.1-1992

il's November 10, 2015 Memorandum for Exempt Modification filing:

Exhibit G

Recipient Mailings

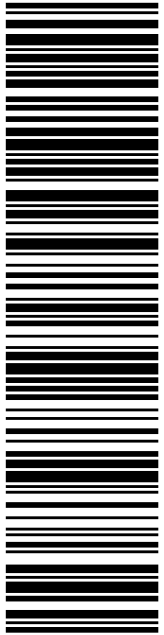

USPS TRACKING #

9405 5036 9930 0444 9741 71

Electronic Rate Approved #038555749

SHIP

TO: LISA MATTHEWS
CT SITING COUNCIL
10 FRANKLIN SQ
NEW BRITAIN CT 06051-2655

DEB CHASE
NORTHEAST SITE SOLUTIONS.COM
420 MAIN ST
STE 2
STURBRIDGE MA 01566-1359

Expected Delivery Date: 07/20/21
Ref#: CR-873645
0004

P

U.S. POSTAGE PAID
click-n-ship®

usps.com 9405 5036 9930 0444 9741 71 0155 0000 0010 6051
US POSTAGE \$15.50
MD Flat Rate Box

07/17/2021 Mailed from 01566

PRIORITY MAIL 2-DAY™

UNITED STATES POSTAL SERVICE®

Click-N-Ship®



Cut on dotted line.

Instructions

1. Each Click-N-Ship® label is unique. Labels are to be used as printed and used only once. DO NOT PHOTO COPY OR ALTER LABEL.
2. Place your label so it does not wrap around the edge of the package.
3. Adhere your label to the package. A self-adhesive label is recommended. If tape or glue is used, DO NOT TAPE OVER BARCODE. Be sure all edges are secure.
4. To mail your package with PC Postage®, you may schedule a Package Pickup online, hand to your letter carrier, take to a Post Office™, or drop in a USPS collection box.
5. Mail your package on the "Ship Date" you selected when creating this label.

Click-N-Ship® Label Record

USPS TRACKING # :
9405 5036 9930 0444 9741 71

| | |
|------------------------------------|--|
| Trans. #: 538412919 | Priority Mail® Postage: \$15.50 |
| Print Date: 07/14/2021 | Total: \$15.50 |
| Ship Date: 07/17/2021 | |
| Expected Delivery Date: 07/20/2021 | |


From: DEB CHASE Ref#: CR-873645
NORTHEAST SITE SOLUTIONS.COM
420 MAIN ST
STE 2
STURBRIDGE MA 01566-1359

To: LISA MATTHEWS
CT SITING COUNCIL
10 FRANKLIN SQ
NEW BRITAIN CT 06051-2655

* Retail Pricing Priority Mail rates apply. There is no fee for USPS Tracking® service on Priority Mail service with use of this electronic rate shipping label. Refunds for unused postage paid labels can be requested online 30 days from the print date.



Thank you for shipping with the United States Postal Service!
Check the status of your shipment on the USPS Tracking® page at usps.com



**UNITED STATES
POSTAL SERVICE®**

Click-N-Ship®

P

usps.com 9405 5036 9930 0444 9741 88 0155 0000 0010 6478
US POSTAGE
 MD Flat Rate Box

U.S. POSTAGE PAID
Click-N-Ship®

07/17/2021 Mailed from 01566

PRIORITY MAIL 2-DAY™


Expected Delivery Date: 07/20/21
 Ref#: CR-873645
0004

DEBORAH CHASE
 NORTHEAST SITE SOLUTIONS, LLC
 420 MAIN ST
 STURBRIDGE MA 01566-1359

R001

SHIP TO:
 GEORGE TEMPLE
 486 OXFORD RD
 OXFORD CT 06478-1298

USPS TRACKING #



9405 5036 9930 0444 9741 88

Electronic Rate Approved #038555749



Cut on dotted line.

Instructions

1. Each Click-N-Ship® label is unique. Labels are to be used as printed and used only once. DO NOT PHOTO COPY OR ALTER LABEL.
2. Place your label so it does not wrap around the edge of the package.
3. Adhere your label to the package. A self-adhesive label is recommended. If tape or glue is used, DO NOT TAPE OVER BARCODE. Be sure all edges are secure.
4. To mail your package with PC Postage®, you may schedule a Package Pickup online, hand to your letter carrier, take to a Post Office™, or drop in a USPS collection box.
5. Mail your package on the "Ship Date" you selected when creating this label.

Click-N-Ship® Label Record

USPS TRACKING # :
9405 5036 9930 0444 9741 88

| | |
|------------------------------------|--|
| Trans. #: 538412919 | Priority Mail® Postage: \$15.50 |
| Print Date: 07/14/2021 | Total: \$15.50 |
| Ship Date: 07/17/2021 | |
| Expected Delivery Date: 07/20/2021 | |

From: DEBORAH CHASE Ref#: CR-873645
 NORTHEAST SITE SOLUTIONS, LLC
 420 MAIN ST
 STURBRIDGE MA 01566-1359

To: GEORGE TEMPLE
 486 OXFORD RD
 OXFORD CT 06478-1298

* Retail Pricing Priority Mail rates apply. There is no fee for USPS Tracking® service on Priority Mail service with use of this electronic rate shipping label. Refunds for unused postage paid labels can be requested online 30 days from the print date.



Thank you for shipping with the United States Postal Service!
 Check the status of your shipment on the USPS Tracking® page at usps.com

Tracking Number: 9405503699300446168691

Remove

Your item was delivered in or at the mailbox at 12:32 pm on July 19, 2021 in NEW BRITAIN, CT 06051.

Status

 **Delivered, In/At Mailbox**

July 19, 2021 at 12:32 pm
NEW BRITAIN, CT 06051

USPS Tracking Plus™ Available 

Get Updates 



Delivered

Text & Email Updates



Tracking History




USPS Tracking Plus™



Product Information



See Less 



**UNITED STATES
POSTAL SERVICE®**

Click-N-Ship®

P

usps.com 9405 5036 9930 0444 9741 95 0155 0000 0010 6478
US POSTAGE
 MD Flat Rate Box

U.S. POSTAGE PAID
click-n-ship®

07/17/2021 Mailed from 01566

PRIORITY MAIL 2-DAY™


DEB CHASE
 420 MAIN ST
 BOX 2
 STURBRIDGE MA 01566-1359

Expected Delivery Date: 07/20/21
 Ref#: CR-873645
0004

R001

SHIP TO:
 STEVEN MACARY
 486 OXFORD RD
 OXFORD CT 06478-1298

USPS TRACKING #

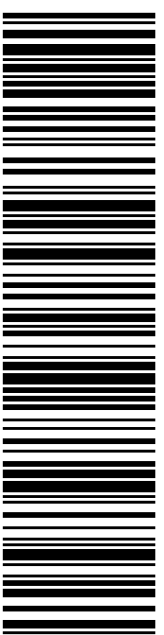

9405 5036 9930 0444 9741 95

Electronic Rate Approved #038555749



Cut on dotted line.

Instructions

1. Each Click-N-Ship® label is unique. Labels are to be used as printed and used only once. DO NOT PHOTO COPY OR ALTER LABEL.
2. Place your label so it does not wrap around the edge of the package.
3. Adhere your label to the package. A self-adhesive label is recommended. If tape or glue is used, DO NOT TAPE OVER BARCODE. Be sure all edges are secure.
4. To mail your package with PC Postage®, you may schedule a Package Pickup online, hand to your letter carrier, take to a Post Office™, or drop in a USPS collection box.
5. Mail your package on the "Ship Date" you selected when creating this label.

Click-N-Ship® Label Record

USPS TRACKING # :
9405 5036 9930 0444 9741 95

| | |
|------------------------------------|--|
| Trans. #: 538412919 | Priority Mail® Postage: \$15.50 |
| Print Date: 07/14/2021 | Total: \$15.50 |
| Ship Date: 07/17/2021 | |
| Expected Delivery Date: 07/20/2021 | |

From: DEB CHASE
 420 MAIN ST
 BOX 2
 STURBRIDGE MA 01566-1359

Ref#: CR-873645

To: STEVEN MACARY
 486 OXFORD RD
 OXFORD CT 06478-1298

* Retail Pricing Priority Mail rates apply. There is no fee for USPS Tracking® service on Priority Mail service with use of this electronic rate shipping label. Refunds for unused postage paid labels can be requested online 30 days from the print date.



Thank you for shipping with the United States Postal Service!
 Check the status of your shipment on the USPS Tracking® page at usps.com

Tracking Number: 9405503699300444974195

Your item was delivered in or at the mailbox at 11:00 am on July 19, 2021 in OXFORD, CT 06478.

USPS Tracking Plus™ Available 

Status

 **Delivered, In/At Mailbox**

July 19, 2021 at 11:00 am
OXFORD, CT 06478

Get Updates 

Delivered

Text & Email Updates



Tracking History




USPS Tracking Plus™



Product Information





**UNITED STATES
POSTAL SERVICE®**

Click-N-Ship®

P

07/17/2021

usps.com 9405 5036 9930 0444 9742 18 0155 0000 0010 6478
US POSTAGE \$15.50
 MD Flat Rate Box

U.S. POSTAGE PAID
Click-N-Ship®

Mailed from 01566

PRIORITY MAIL 2-DAY™

Expected Delivery Date: 07/20/21
 Ref#: CR-873645
0004

SHIP TO:
 DON AND DAVE FARM REALTY LLC
 691 OXFORD RD
 OXFORD CT 06478-1244

USPS TRACKING #

9405 5036 9930 0444 9742 18

Electronic Rate Approved #038555749



Cut on dotted line.

Instructions

1. Each Click-N-Ship® label is unique. Labels are to be used as printed and used only once. DO NOT PHOTO COPY OR ALTER LABEL.
2. Place your label so it does not wrap around the edge of the package.
3. Adhere your label to the package. A self-adhesive label is recommended. If tape or glue is used, DO NOT TAPE OVER BARCODE. Be sure all edges are secure.
4. To mail your package with PC Postage®, you may schedule a Package Pickup online, hand to your letter carrier, take to a Post Office™, or drop in a USPS collection box.
5. Mail your package on the "Ship Date" you selected when creating this label.

Click-N-Ship® Label Record

USPS TRACKING # :
9405 5036 9930 0444 9742 18

| | |
|------------------------------------|--|
| Trans. #: 538412919 | Priority Mail® Postage: \$15.50 |
| Print Date: 07/14/2021 | Total: \$15.50 |
| Ship Date: 07/17/2021 | |
| Expected Delivery Date: 07/20/2021 | |

From: DEB CHASE
 420 MAIN ST
 STE 1
 STURBRIDGE MA 01566-1359

Ref#: CR-873645

To: DON AND DAVE FARM REALTY LLC
 691 OXFORD RD
 OXFORD CT 06478-1244

* Retail Pricing Priority Mail rates apply. There is no fee for USPS Tracking® service on Priority Mail service with use of this electronic rate shipping label. Refunds for unused postage paid labels can be requested online 30 days from the print date.



Thank you for shipping with the United States Postal Service!
 Check the status of your shipment on the USPS Tracking® page at usps.com

Tracking Number: 9405503699300446168691

Remove

Your item was delivered in or at the mailbox at 12:32 pm on July 19, 2021 in NEW BRITAIN, CT 06051.

Status

 **Delivered, In/At Mailbox**

July 19, 2021 at 12:32 pm
NEW BRITAIN, CT 06051

USPS Tracking Plus™ Available 

Get Updates 



Delivered

Text & Email Updates



Tracking History




USPS Tracking Plus™



Product Information



See Less 

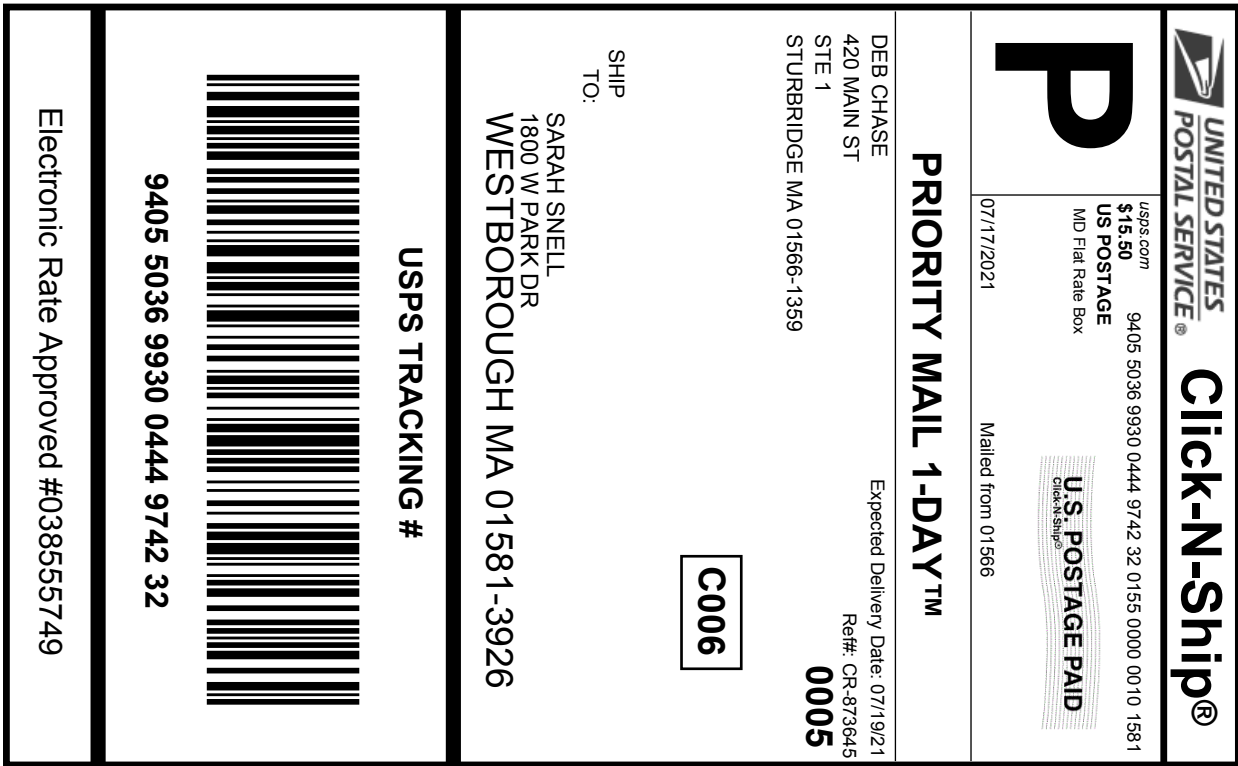

Cut on dotted line.

Instructions

1. Each Click-N-Ship® label is unique. Labels are to be used as printed and used only once. DO NOT PHOTO COPY OR ALTER LABEL.
2. Place your label so it does not wrap around the edge of the package.
3. Adhere your label to the package. A self-adhesive label is recommended. If tape or glue is used, DO NOT TAPE OVER BARCODE. Be sure all edges are secure.
4. To mail your package with PC Postage®, you may schedule a Package Pickup online, hand to your letter carrier, take to a Post Office™, or drop in a USPS collection box.
5. Mail your package on the "Ship Date" you selected when creating this label.

Click-N-Ship® Label Record

| | |
|---|---|
| USPS TRACKING # : | |
| 9405 5036 9930 0444 9742 32 | |
| Trans. #: | 538412919 |
| Print Date: | 07/14/2021 |
| Ship Date: | 07/17/2021 |
| Expected | |
| Delivery Date: | 07/19/2021 |
| Priority Mail® Postage: | \$15.50 |
| Total: | \$15.50 |
| From: | DEB CHASE 420 MAIN ST STE 1 STURBRIDGE MA 01566-1359 |
| | Ref#: CR-873645 |
| To: | SARAH SNELL 1800 W PARK DR WESTBOROUGH MA 01581-3926 |
| <small>* Retail Pricing Priority Mail rates apply. There is no fee for USPS Tracking® service on Priority Mail service with use of this electronic rate shipping label. Refunds for unused postage paid labels can be requested online 30 days from the print date.</small> | |



Thank you for shipping with the United States Postal Service!
Check the status of your shipment on the USPS Tracking® page at usps.com