



Crown Castle
3 Corporate Park Drive, Suite 101
Clifton Park, NY 12065

September 25, 2018

Melanie A. Bachman
Acting Executive Director
Connecticut Siting Council
10 Franklin Square
New Britain, CT 06051

RE: Notice of Exempt Modification for Sprint DO Macro: 876385
Sprint Site ID: CT33XC551
400 Riley Mtn. Rd. Coventry, Connecticut 06238
Latitude: 41° 47' 56.21"/Longitude: -72° 19' 55.88"

Dear Ms. Bachman:

Sprint currently maintains six (6) antennas at the 152-foot level of the existing 152-foot monopole tower at 400 Riley Mtn. Rd. Coventry, CT. 06238. The tower is owned by Crown Castle. The James + Concetta Wallbeoff Trustees own the property. Sprint now intends to replace Six (6) antennas with six (6) new antennas. These antennas would be installed at the 152-foot level of the tower. Sprint also intends to install nine (9) RRHs, one (1) platform reinforcement kit, one (1) upper hand rail kit and install four (4) hybrid cables.

This facility was approved by the Coventry Planning and Zoning Commission on August 28th, 2000. This approval was given without conditions.

Please accept this letter as notification pursuant to Regulations of Connecticut State Agencies § 16-50j-73, for construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-72(b)(2). In accordance with R.S.C.A. § 16-50j-73, a copy of this letter is being sent to Town manager John Elsesser, Town of Coventry, Joseph Callahan, Building Official, Town of Coventry, as well as the property owner, and Crown Castle is the tower owner.

1. The proposed modifications will not result in an increase in the height of the existing tower.
2. The proposed modifications will not require the extension of the site boundary.
3. The proposed modification will not increase noise levels at the facility by six decibels or more, or to levels that exceed state and local criteria.

The Foundation for a Wireless World.

CrownCastle.com

Melanie A. Bachman

September 27, 2018

Page 2

4. The operation of the replacement antennas will not increase radio frequency emissions at the facility to a level at or above the Federal Communication Commission safety standard.
5. The proposed modifications will not cause a change or alteration in the physical or environmental characteristics of the site.
6. The existing structure and its foundation can support the proposed loading.

For the foregoing reasons, Sprint respectfully submits that the proposed modifications to the above-reference telecommunications facility constitutes an exempt modification under R.C.S.A. § 16-50j-72(b)(2). Please send approval/rejection letter to Attn: Jeffrey Barbadora.

Sincerely,

Jeffrey Barbadora
Real Estate Specialist
12 Gill Street, Suite 5800, Woburn, MA 01801
781-729-0053
Jeff.Barbadora@crowncastle.com

Attachments:

- Tab 1: Exhibit-1: Compound plan and elevation depicting the planned changes
- Tab 2: Exhibit-2: Structural Modification Report
- Tab 3: Exhibit-3: General Power Density Table Report (RF Emissions Analysis Report)

cc: Town Manager John Elsesser
Town Hall: 1712 Main St.
Coventry, CT 06238

Bob Roraback, Building Official
Town Hall: 1712 Main St.
Coventry, CT 06238

James + Concetta Walbeoff Trustees
4 Knotty Pine Lane.
Deerfield, VA 24432



Property Information

Property Location	400 RILEY MOUNTAIN RD
Owner	WALLBEOFF JAMES + CONCETTA
Co-Owner	C/O SPRINT SPECTRUM
Mailing Address	PO BOX 8430 KANSAS CITY MO 64114
Land Use	100 Resid Vacant
Land Class	R
Zoning Code	GR80
Census Tract	

Neighborhood	
Acreage	1
Utilities	Septic
Lot Setting/Desc	Level
Additional Info	

Photo



Sketch

Primary Construction Details

Year Built	
Stories	
Building Style	
Building Use	
Building Condition	
Floors	
Total Rooms	

Bedrooms	
Full Bathrooms	
Half Bathrooms	
Bath Style	
Kitchen Style	
Roof Style	
Roof Cover	

Exterior Walls	
Interior Walls	
Heating Type	
Heating Fuel	
AC Type	
Gross Bldg Area	
Total Living Area	



Town of Coventry, CT

Property Listing Report

Map Block Lot

011 0029A 0003T

Account

R06342

Valuation Summary (Assessed value = 70% of Appraised Value)

Item	Appraised	Assessed
Buildings	0	0
Extras	0	0
Improvements	179400	125600
Outbuildings	179400	125600
Land	357500	250300
Total	536900	375900

Sub Areas

Subarea Type	Gross Area (sq ft)	Living Area (sq ft)
Total Area		0

Outbuilding and Extra Items

Type	Description
Canopy	220 S.F.
Cell Shed	360 S.F.
Cell Shed	240 S.F.
Fence- Average	2800 S.F.

Sales History


Owner of Record	Book/ Page	Sale Date	Sale Price
WALLBEOFF JAMES + CONCETTA TRUSTEES	770/ 286	9/23/2002	

400 Riley Mountain Rd
Coventry, CT 06238

Directions

SAVE NEARBY SEND TO YOUR PHONE SHARE

- RM49+F5 Coventry, Connecticut
- Add a missing place
- Add a label

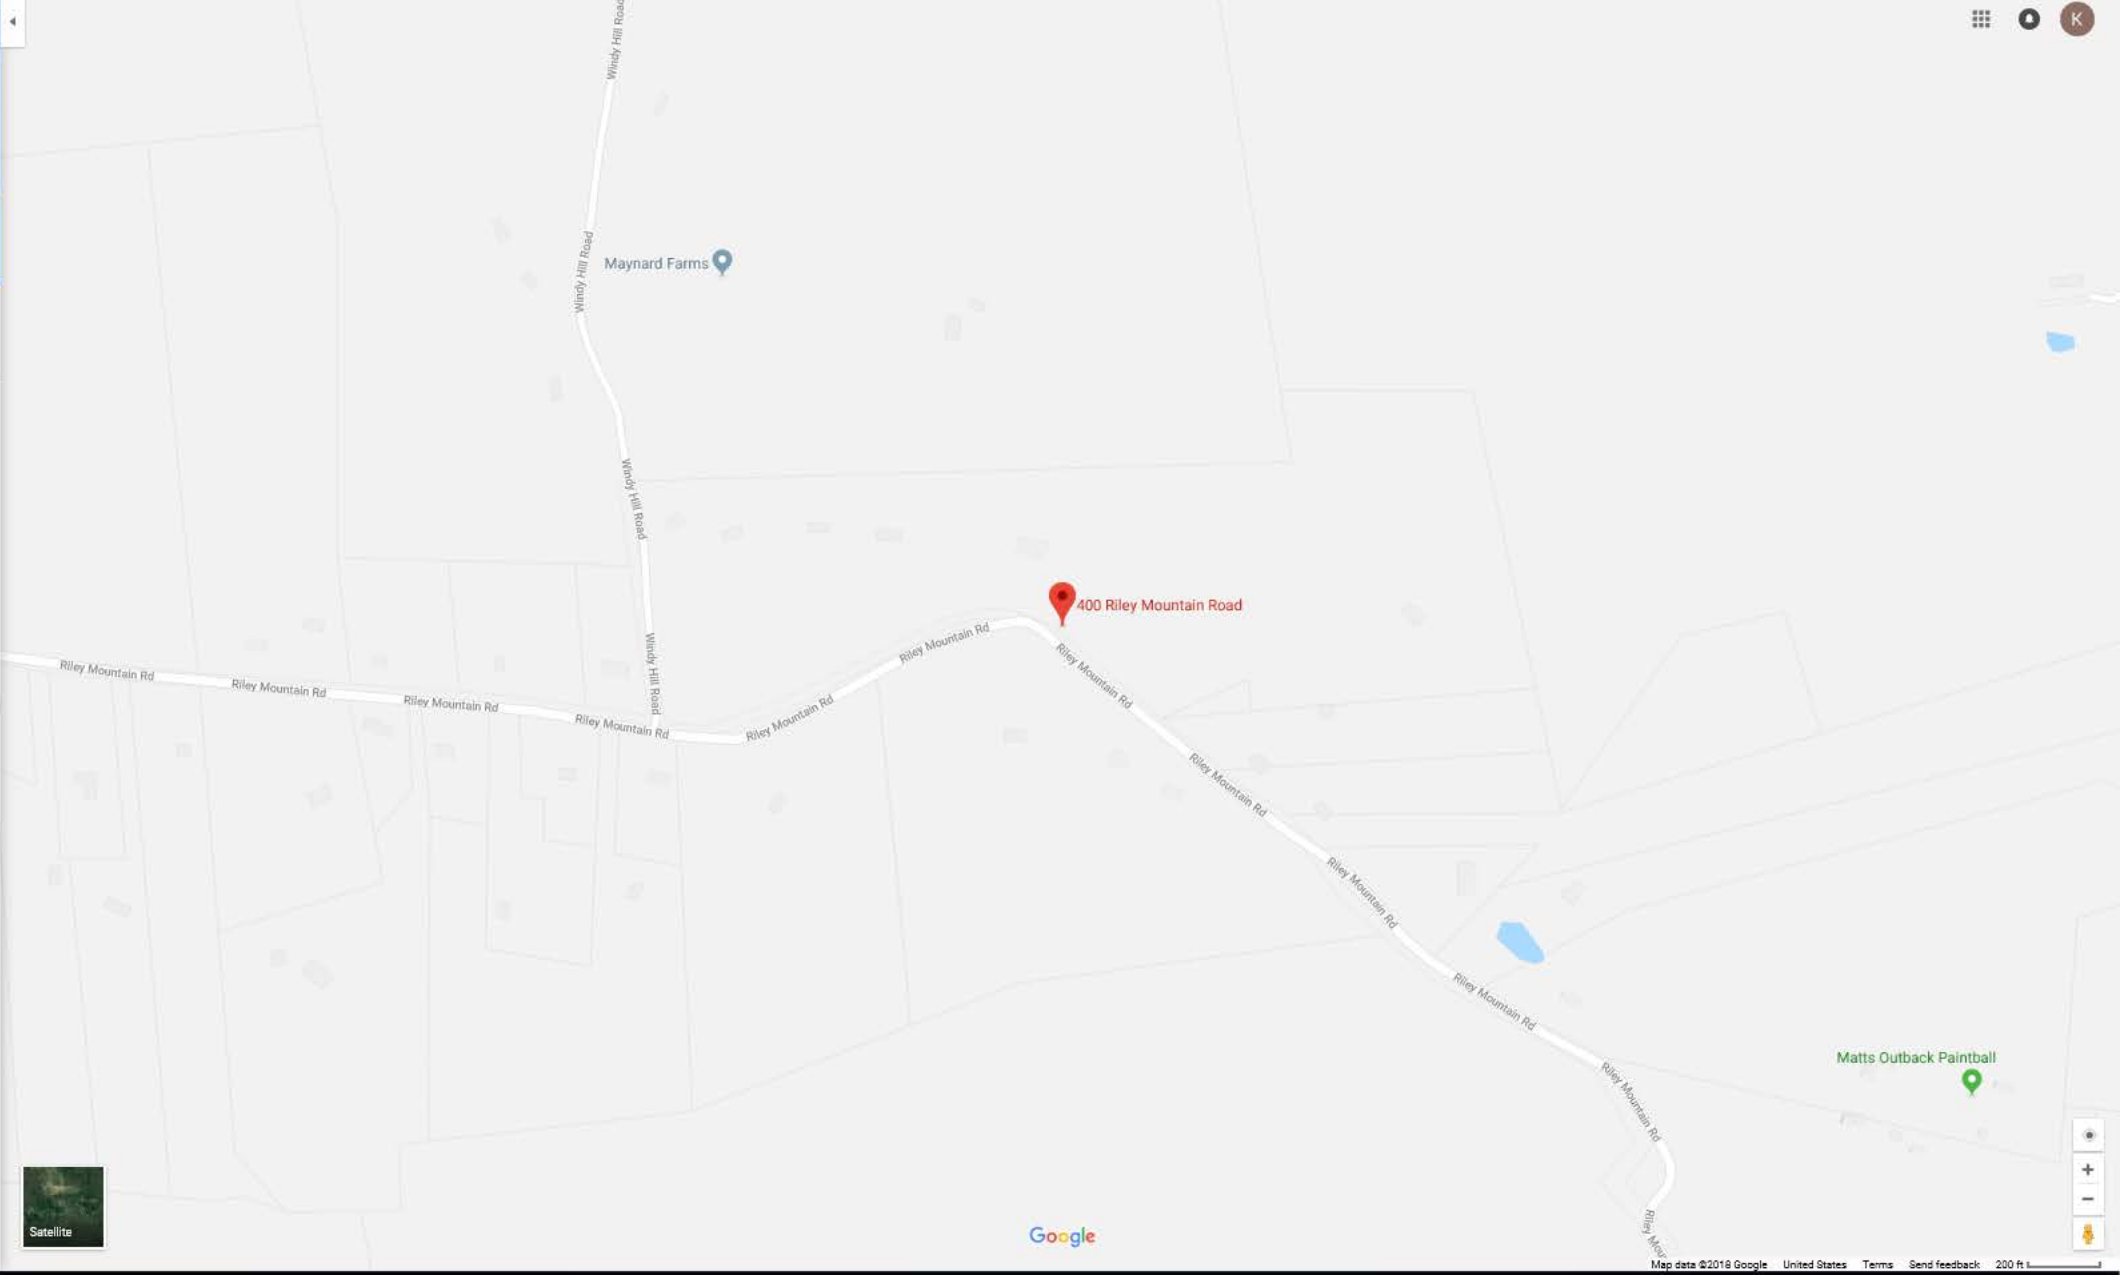

SPECIAL CONSTRUCTION NOTE:
 SPRINT WORK IS CONTINGENT ON THE FOLLOWING:
 * COMPLETION OF A GLOBAL STRUCTURAL STABILITY ANALYSIS.
 * COMPLETION OF AN ANTENNA/RRH MOUNT STRUCTURAL ASSESSMENT.
 * GC SHALL FURNISH, INSTALL AND COMPLETE ALL REQUIRED STRUCTURAL MODIFICATIONS AS INDICATED IN BEFORE-MENTIONED ANALYSIS AND ASSESSMENT.

Sprint



PROJECT: DO MACRO UPGRADE (800 3G/4G & 2.5)
SITE NAME: N. COVENTRY/ WALLBEOFF
SITE CASCADE: CT33XC551
MARKET: NE
SITE ADDRESS: REILLY MTN. RD.
 COVENTRY, CT 06238
SITE TYPE: MONOPOLE

INTERNATIONAL BLVD, SUITE 800
 MAHWAH, NJ 07495
 TEL: (800) 357-7641

CROWN CASTLE
 12 GILL STREET, SUITE 5800
 WOBURN, MA 01801

HUDSON
 Design Group LLC
 45 BEECHWOOD DRIVE
 N. ANDOVER, MA 01851
 TEL: (978) 557-5553
 FAX: (978) 336-5586

Know what's below.
 Call before you dig.
 www.call811.com


CROWN CASTLE SITE #: 876385
CROWN CASTLE SITE NAME: N. COVENTRY/ WALLBEOFF

DEREK J. CREASER
 LICENSED PROFESSIONAL ENGINEER
 CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN

NOTE:
 OWNER AND TENANT MAY, FROM TIME TO TIME AT TENANT'S OPTION, REPLACE THIS EXHIBIT WITH AN EXHIBIT SETTING FORTH THE LEGAL DESCRIPTION OF THE SITE, OR WITH ENGINEERED OR AS-BUILT DRAWING DEPICTING THE SITE OR ILLUSTRATING STRUCTURAL MODIFICATIONS OR CONSTRUCTION PLANS OF THE SITE. ANY VISUAL OR TEXTUAL REPRESENTATION OF THE EQUIPMENT LOCATED WITHIN THE SITE CONTAINED IN THESE OTHER DOCUMENTS IS ILLUSTRATIVE ONLY, AND DOES NOT LIMIT THE RIGHTS OF SPRINT AS PROVIDED FOR IN THE AGREEMENT. THE LOCATIONS OF ANY ACCESS AND UTILITY EASEMENTS ARE ILLUSTRATIVE ONLY. ACTUAL LOCATIONS MAY BE DETERMINED BY TENANT AND/OR THE SERVICING UTILITY COMPANY IN COMPLIANCE WITH LOCAL LAWS AND REGULATIONS.

STRUCTURAL NOTE:
 PRIOR TO COMMENCING CONSTRUCTION, GC SHALL REFER TO TOWER STRUCTURAL ANALYSIS PROVIDED BY CROWN CASTLE DATED JUNE 29, 2018 AND MOUNT STRUCTURAL ANALYSIS BY HUDSON DESIGN GROUP DATED JUNE 22, 2018 (REV. 1) TO DETERMINE IF THERE ANY SUPPLEMENTAL OR SPECIAL INSTALLATION REQUIREMENTS, OR RELOCATION ARRANGEMENTS.

VICINITY MAP
 N.T.S.

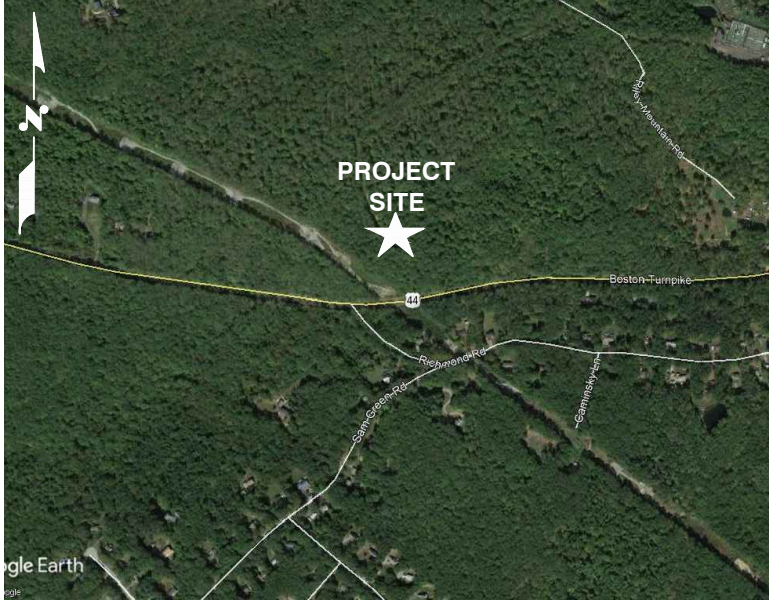

PROJECT INFORMATION

SITE INFORMATION:
 SPRINT EQUIPMENT MODIFICATIONS REQUIRED TO SUPPORT MODERNIZATION OF AN EXISTING WIRELESS COMMUNICATIONS FACILITY AND UTILIZATION OF FCC BROADBAND SPECTRUM LICENSE FOR DO_MACRO UPGRADE, INCLUDING INSTALLATION OF:
 GROUND-LEVEL RAN EQUIPMENT, CONSISTING OF:
 * NO CHANGES
 TOWER EQUIPMENT, INCLUDING INSTALLATION OF:
 * (6) PANEL ANTENNAS TO REPLACE (6) EXISTING ANTENNAS
 * (9) REMOTE RADIO HEADS (RRH), (3) 1900 RRUS RELOCATED TO TOWER TOP FROM GROUND LEVEL
 * (4) HYBRID CABLES
 * (1) PLATFORM REINFORCEMENT KIT
 * (1) UPPER HAND RAIL KIT

LATITUDE: N 41' 47' 56.21"
 LONGITUDE: W 72' 19' 55.88"
 GROUND ELEVATION: 712± AMSL (PER GOOGLE EARTH)
 STRUCTURE HEIGHT: 152± AGL (TYPE: MONOPOLE)
 ZONING JURISDICTION: COVENTRY

APPLICANT:
 SPRINT
 1 INTERNATIONAL BLVD, SUITE 800
 MAHWAH, NJ 07495

PROPERTY OWNER:
 UNKNOWN

TOWER OWNER:
 CROWN CASTLE
 12 GILL STREET
 SUITE 5800
 WOBURN, MA 01801

SPRINT CONSTRUCTION MANAGER:
 MIKE DURKIN
 PHONE: 401-363-9923
 michael.durkin@sprint.com

CROWN CASTLE PROJECT MANAGER:
 WILL STONE
 PHONE: 518-373-3543
 william.stone@crowncastle.com

SPRINT MARKET MANAGER:
 RONALD HIBBARD
 PHONE: 774-269-8812
 ronald.hibbard@sprint.com

DRAWING INDEX

SHEET NO.	DESCRIPTION	REV.
T-1	TITLE SHEET	1
SP-1	OUTLINE SPECIFICATIONS	1
SP-2	OUTLINE SPECIFICATIONS	1
SP-3	OUTLINE SPECIFICATIONS	1
A-1	COMPOUND PLAN & EQUIPMENT PLAN	1
A-2	ANTENNA PLANS & ELEVATION	1
A-3	EQUIPMENT DETAILS	1
A-4	MOUNTING DETAILS	1
RF-1	RF DATA SHEET	1
RF-2	WIRING DIAGRAMS	1
G-1	ONE LINE DIAGRAM, GROUNDING DETAILS & NOTES	1

SPECIAL ZONING NOTE

BASED ON INFORMATION PROVIDED BY SPRINT REGULATORY COMPLIANCE PROFESSIONALS AND LEGAL COUNSEL, THIS TELECOMMUNICATIONS EQUIPMENT DEPLOYMENT IS CONSIDERED AN ELIGIBLE FACILITY UNDER THE TAX RELIEF ACT OF 2012, 47 USC 1455(A), AND IS SUBJECT TO AN EXPEDITED ELIGIBLE FACILITIES REQUEST/REVIEW AND ZONING PRE-EMPTION FOR LOCAL DISCRETIONARY PERMITS (VARIANCE, SPECIAL PERMIT, SITE PLAN REVIEW, ADMINISTRATIVE REVIEW).

GENERAL NOTES

- THIS IS AN UNMANNED TELECOMMUNICATION FACILITY AND NOT FOR HUMAN HABITATION:
 - ADA COMPLIANCE NOT REQUIRED.
 - POTABLE WATER OR SANITARY SERVICE IS NOT REQUIRED.
 - NO OUTDOOR STORAGE OR ANY SOLID WASTE RECEPTACLES REQUIRED.
- CONTRACTOR SHALL VERIFY ALL PLANS, EXISTING DIMENSIONS, AND CONDITIONS ON JOB SITE. CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT/ENGINEER IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK. FAILURE TO NOTIFY THE ARCHITECT/ENGINEER PLACE THE RESPONSIBILITY ON THE CONTRACTOR TO CORRECT THE DISCREPANCIES AT THE CONTRACTOR'S EXPENSE.
- CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN.
- NEW CONSTRUCTION WILL CONFORM TO ALL APPLICABLE CODES AND ORDINANCES.
 BUILDING CODE: INTERNATIONAL BUILDING CODE 2012 WITH 2016 CT STATE BUILDING CODE AMENDMENTS
 ELECTRICAL CODE: NFPA 70 2014 - NATIONAL ELECTRIC CODE
 STRUCTURAL CODE: TIA/EIA-222-G STRUCTURAL STANDARDS FOR ANTENNA SUPPORTING STRUCTURES AND ANTENNAS.

APPROVALS

PROJECT MANAGER	DATE
CONSTRUCTION	DATE
RF ENGINEERING	DATE
ZONING / SITE ACQ.	DATE
OPERATIONS	DATE
TOWER OWNER	DATE

CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
1	07/25/18	CONSTRUCTION FINAL	GA
0	01/23/18	ISSUED FOR CONSTRUCTION	AN

SITE NUMBER:
 CT33XC551
 SITE NAME:
 N. COVENTRY/
 WALLBEOFF
 CROWN BU NUMBER:
 876385
 SITE ADDRESS:
 REILLY MTN. RD.
 COVENTRY, CT 06238
 TOLLAND COUNTY

SHEET TITLE

TITLE SHEET
 (DO MIMO REDESIGN)

SHEET NUMBER

T-1

THESE OUTLINE SPECIFICATIONS IN CONJUNCTION WITH THE SPRINT STANDARD CONSTRUCTION SPECIFICATIONS, INCLUDING CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

SECTION 01 100 – SCOPE OF WORK

PART 1 – GENERAL

1.1 **THE WORK:** THESE STANDARD CONSTRUCTION SPECIFICATIONS IN CONJUNCTION WITH THE SPRINT CONSTRUCTION STANDARDS FOR WIRELESS SITES, CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

1.2 **RELATED DOCUMENTS:**

- A. THE REQUIREMENTS OF THIS SECTION APPLY TO ALL SECTIONS IN THIS SPECIFICATION.
- B. SPRINT "STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES" ARE INCLUDED IN AND MADE A PART OF THESE SPECIFICATIONS HERewith.

1.3 **PRECEDENCE:** SHOULD CONFLICTS OCCUR BETWEEN THE STANDARD CONSTRUCTION SPECIFICATIONS FOR WIRELESS SITES INCLUDING THE STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES AND THE CONSTRUCTION DRAWINGS, INFORMATION ON THE CONSTRUCTION DRAWINGS SHALL TAKE PRECEDENCE. NOTIFY SPRINT CONSTRUCTION MANAGER IF THIS OCCURS.

1.4 **NATIONALLY RECOGNIZED CODES AND STANDARDS:**

- A. THE WORK SHALL COMPLY WITH APPLICABLE NATIONAL AND LOCAL CODES AND STANDARDS, LATEST EDITION, AND PORTIONS THEREOF, INCLUDED BUT NOT LIMITED TO THE FOLLOWING:
 1. GR-78-CORE GENERIC REQUIREMENTS FOR THE PHYSICAL DESIGN AND MANUFACTURE OF TELECOMMUNICATIONS EQUIPMENT.
 2. GR-1089 CORE, ELECTROMAGNETIC COMPATIBILITY AND ELECTRICAL SAFETY –GENERIC CRITERIA FOR NETWORK TELECOMMUNICATIONS EQUIPMENT.
 3. NATIONAL FIRE PROTECTION ASSOCIATION CODES AND STANDARDS (NFPA) INCLUDING NFPA 70 (NATIONAL ELECTRICAL CODE – "NEC") AND NFPA 101 (LIFE SAFETY CODE).
 4. AMERICAN SOCIETY FOR TESTING OF MATERIALS (ASTM)
 5. INSTITUTE OF ELECTRONIC AND ELECTRICAL ENGINEERS (IEEE)
 6. AMERICAN CONCRETE INSTITUTE (ACI)
 7. AMERICAN WIRE PRODUCERS ASSOCIATION (AWPA)
 8. CONCRETE REINFORCING STEEL INSTITUTE (CRSI)
 9. AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)
 10. PORTLAND CEMENT ASSOCIATION (PCA)
 11. NATIONAL CONCRETE MASONRY ASSOCIATION (NCMA)
 12. BRICK INDUSTRY ASSOCIATION (BIA)
 13. AMERICAN WELDING SOCIETY (AWS)
 14. NATIONAL ROOFING CONTRACTORS ASSOCIATION (NRCA)
 15. SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)
 16. DOOR AND HARDWARE INSTITUTE (DHI)
 17. OCCUPATIONAL SAFETY AND HEALTH ACT (OSHA)
 18. APPLICABLE BUILDING CODES INCLUDING UNIFORM BUILDING CODE, SOUTHERN BUILDING CODE, BOCA, AND THE INTERNATIONAL BUILDING CODE.

1.5 **DEFINITIONS:**

- A. WORK: THE SUM OF TASKS AND RESPONSIBILITIES IDENTIFIED IN THE CONTRACT DOCUMENTS.
- B. COMPANY: SPRINT CORPORATION
- C. ENGINEER: SYNONYMOUS WITH ARCHITECT & ENGINEER AND "A&E". THE DESIGN PROFESSIONAL HAVING PROFESSIONAL RESPONSIBILITY FOR DESIGN OF THE PROJECT.
- D. CONTRACTOR: CONSTRUCTION CONTRACTOR; CONSTRUCTION VENDOR; INDIVIDUAL OR ENTITY WHO AFTER EXECUTION OF A CONTRACT IS BOUND TO ACCOMPLISH THE WORK.
- E. THIRD PARTY VENDOR OR AGENCY: A VENDOR OR AGENCY ENGAGED SEPARATELY BY THE COMPANY, A&E, OR CONTRACTOR TO PROVIDE MATERIALS OR TO ACCOMPLISH SPECIFIC TASKS RELATED TO BUT NOT INCLUDED IN THE WORK.
- F. OFCI: OWNER FURNISHED, CONTRACTOR INSTALLED EQUIPMENT.
- G. CONSTRUCTION MANAGER – ALL PROJECTS RELATED COMMUNICATION TO FLOW THROUGH SPRINT REPRESENTATIVE IN CHARGE OF PROJECT...

1.6 **SITE FAMILIARITY:** CONTRACTOR SHALL BE RESPONSIBLE FOR FAMILIARIZING HIMSELF WITH ALL CONTRACT DOCUMENTS, FIELD CONDITIONS AND DIMENSIONS PRIOR TO PROCEEDING WITH CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE SPRINT CONSTRUCTION MANAGER PRIOR TO THE COMMENCEMENT OF WORK. NO COMPENSATION WILL BE AWARDED BASED ON CLAIM OF LACK OF KNOWLEDGE OR FIELD CONDITIONS.

1.7 **POINT OF CONTACT:** COMMUNICATION BETWEEN SPRINT AND THE CONTRACTOR SHALL FLOW THROUGH THE SINGLE SPRINT CONSTRUCTION MANAGER APPOINTED TO MANAGE THE PROJECT FOR SPRINT.

1.8 **ON-SITE SUPERVISION:** THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE WORK AND SHALL BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, AND PROCEDURES IN ACCORDANCE WITH THE CONTRACT DOCUMENTS. THE CONTRACTOR SHALL EMPLOY A COMPETENT SUPERINTENDENT WHO SHALL BE IN ATTENDANCE AT THE SITE AT ALL TIMES DURING PERFORMANCE OF THE WORK.

1.9 **DRAWINGS, SPECIFICATIONS AND DETAILS REQUIRED AT JOBSITE:** THE CONSTRUCTION CONTRACTOR SHALL MAINTAIN A FULL SET OF THE CONSTRUCTION DRAWINGS, STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES AND THE STANDARD CONSTRUCTION SPECIFICATIONS FOR WIRELESS SITES AT THE JOBSITE FROM MOBILIZATION THROUGH CONSTRUCTION COMPLETION.

- A. THE JOBSITE DRAWINGS, SPECIFICATIONS AND DETAILS SHALL BE CLEARLY MARKED DAILY IN RED PENCIL WITH ANY CHANGES IN CONSTRUCTION OVER WHAT IS DEPICTED IN THE DOCUMENTS. AT CONSTRUCTION COMPLETION, THIS JOBSITE MARKUP SET SHALL BE DELIVERED TO THE COMPANY OR COMPANY'S DESIGNATED REPRESENTATIVE TO BE FORWARDED TO THE COMPANY'S A&E VENDOR FOR PRODUCTION OF "AS-BUILT" DRAWINGS.
- B. DETAILS ARE INTENDED TO SHOW DESIGN INTENT. MODIFICATIONS MAY BE REQUIRED TO SUIT JOB DIMENSIONS OR CONDITIONS, AND SUCH MODIFICATIONS SHALL BE INCLUDED AS PART OF THE WORK. CONTRACTOR SHALL NOTIFY SPRINT CONSTRUCTION MANAGER OF ANY VARIATIONS PRIOR TO PROCEEDING WITH THE WORK.
- C. DIMENSIONS SHOWN ARE TO FINISH SURFACES UNLESS NOTED OTHERWISE. SPACING BETWEEN EQUIPMENT IS THE REQUIRED CLEARANCE. SHOULD THERE BE ANY QUESTIONS REGARDING THE CONTRACT DOCUMENTS, EXISTING CONDITIONS AND/OR DESIGN INTENT, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING A CLARIFICATION FROM THE SPRINT CONSTRUCTION MANAGER PRIOR TO PROCEEDING WITH THE WORK.

1.10 **USE OF JOB SITE:** THE CONTRACTOR SHALL CONFINE ALL CONSTRUCTION AND RELATED OPERATIONS INCLUDING STAGING AND STORAGE OF MATERIALS AND EQUIPMENT, PARKING, TEMPORARY FACILITIES, AND WASTE STORAGE TO THE LEASE PARCEL UNLESS OTHERWISE PERMITTED BY THE CONTRACT DOCUMENTS.

1.11 **UTILITIES SERVICES:** WHERE NECESSARY TO CUT EXISTING PIPES, ELECTRICAL WIRES, CONDUITS, CABLES, ETC., OF UTILITY SERVICES, OR OF FIRE PROTECTION OR COMMUNICATIONS SYSTEMS, THEY SHALL BE CUT AND CAPPED AT SUITABLE PLACES OR WHERE SHOWN. ALL SUCH ACTIONS SHALL BE COORDINATED WITH THE UTILITY COMPANY INVOLVED:

1.12 **PERMITS / FEES:** WHEN REQUIRED THAT A PERMIT OR CONNECTION FEE BE PAID TO A PUBLIC UTILITY PROVIDER FOR NEW SERVICE TO THE CONSTRUCTION PROJECT, PAYMENT OF SUCH FEE SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.

1.13 CONTRACTOR SHALL TAKE ALL MEASURES AND PROVIDE ALL MATERIAL NECESSARY FOR PROTECTING EXISTING EQUIPMENT AND PROPERTY.

1.14 **METHODS OF PROCEDURE (MOPS) FOR CONSTRUCTION:** CONTRACTOR SHALL PERFORM WORK AS DESCRIBED IN THE FOLLOWING INSTALLATION AND COMMISSIONING MOPS.

- A. TOP HAT
- B. HOW TO INSTALL A NEW CABINET
- C. BASE BAND UNIT IN EXISTING UNIT
- D. INSTALLATION OF BATTERIES
- E. INSTALLATION OF HYBRID CABLE
- F. INSTALLATION OF RRH'S
- G. CABLING
- H. SPRINT TS-0200 (CURRENT VERSION) – ANTENNA LINE ACCEPTANCE STANDARDS
- I. SPRINT CELL SITE ENGINEERING NOTICE – EN 2012-001, REV 1.
- J. COMMISSIONING MOPS
- K. SPRINT CELL SITE ENGINEERING NOTICE – EN-2013-002
- L. SPRINT ENGINEERING LETTER – EL-0504
- M. SPRINT ENGINEERING LETTER – EL-0568
- N. SPRINT TECHNICAL SPECIFICATION – TS-0193

1.15 **USE OF ELECTRONIC PROJECT MANAGEMENT SYSTEMS:**

- A. CONTRACTOR WILL UTILIZE ITS BEST EFFORTS TO WORK WITH SPRINT ELECTRONIC PROJECT MANAGEMENT SYSTEMS. CONTRACTOR UNDERSTANDS THAT SUFFICIENT INTERNET ACCESS, EQUIVALENT TO "BROADBAND" OR BETTER, IS REQUIRED TO TIMELY AND EFFECTIVELY UTILIZE SPRINT DATA AND DOCUMENT MANAGEMENT SYSTEMS AND AGREES TO MAINTAIN APPROPRIATE CONNECTIONS FOR CONTRACTOR'S STAFF AND OFFICES THAT ARE COMPATIBLE WITH SPRINT DATA AND DOCUMENT MANAGEMENT SYSTEMS

PART 2 – PRODUCTS (NOT USED)

PART 3 – EXECUTION

3.1 **TEMPORARY UTILITIES AND FACILITIES:** THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL TEMPORARY UTILITIES AND FACILITIES NECESSARY EXCEPT AS OTHERWISE INDICATED IN THE CONSTRUCTION DOCUMENTS. TEMPORARY UTILITIES AND FACILITIES INCLUDE POTABLE WATER, HEAT, HVAC, ELECTRICITY, SANITARY FACILITIES, WASTE DISPOSAL FACILITIES, AND TELEPHONE/COMMUNICATION SERVICES. PROVIDE TEMPORARY UTILITIES AND FACILITIES IN ACCORDANCE WITH OSHA AND THE AUTHORITY HAVING JURISDICTION. CONTRACTOR MAY UTILIZE THE COMPANY ELECTRICAL SERVICE IN THE COMPLETION OF THE WORK WHEN IT BECOMES AVAILABLE. USE OF THE LESSORS OR SITE OWNER'S UTILITIES OR FACILITIES IS EXPRESSLY FORBIDDEN EXCEPT AS OTHERWISE ALLOWED IN THE CONTRACT DOCUMENTS.

3.2 **ACCESS TO WORK:** THE CONTRACTOR SHALL PROVIDE ACCESS TO THE JOB SITE FOR AUTHORIZED COMPANY PERSONNEL AND AUTHORIZED REPRESENTATIVES OF THE ARCHITECT/ENGINEER DURING ALL PHASES OF THE WORK.

3.3 **TESTING; REQUIREMENTS FOR TESTING BY THIS CONTRACTOR SHALL BE AS INDICATED HERewith, ON THE CONSTRUCTION DRAWINGS, AND IN THE INDIVIDUAL SECTIONS OF THESE SPECIFICATIONS.** SHOULD COMPANY CHOOSE TO ENGAGE ANY THIRD-PARTY TO CONDUCT ADDITIONAL TESTING, THE CONTRACTOR SHALL COOPERATE WITH AND PROVIDE A WORK AREA FOR COMPANY'S TEST AGENCY.

3.4 **DIMENSIONS:** VERIFY DIMENSIONS INDICATED ON DRAWINGS WITH FIELD DIMENSIONS BEFORE FABRICATION OR ORDERING OF MATERIALS. DO NOT SCALE DRAWINGS.

3.5 **EXISTING CONDITIONS:** NOTIFY THE SPRINT CONSTRUCTION MANAGER OF EXISTING CONDITIONS DIFFERING FROM THOSE INDICATED ON THE DRAWINGS. DO NOT REMOVE OR ALTER STRUCTURAL COMPONENTS WITHOUT PRIOR WRITTEN APPROVAL FROM THE ARCHITECT AND ENGINEER.

SECTION 01 200 – COMPANY FURNISHED MATERIAL AND EQUIPMENT

PART 1 – GENERAL

1.1 **THE WORK:** THESE STANDARD CONSTRUCTION SPECIFICATIONS IN CONJUNCTION WITH THE OTHER CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

1.2 **RELATED DOCUMENTS:**

- A. THE REQUIREMENTS OF THIS SECTION APPLY TO ALL SECTIONS IN THIS SPECIFICATION.
- B. SPRINT "STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES" ARE INCLUDED IN AND MADE A PART OF THESE SPECIFICATIONS HERewith.

PART 2 – PRODUCTS (NOT USED)

PART 3 – EXECUTION

3.1 **RECEIPT OF MATERIAL AND EQUIPMENT:**

- A. COMPANY FURNISHED MATERIAL AND EQUIPMENT IS IDENTIFIED ON THE RF DATA SHEET IN THE CONSTRUCTION DOCUMENTS.
- B. THE CONTRACTOR IS RESPONSIBLE FOR SPRINT PROVIDED MATERIAL AND EQUIPMENT AND UPON RECEIPT SHALL:
 1. ACCEPT DELIVERIES AS SHIPPED AND TAKE RECEIPT.
 2. VERIFY COMPLETENESS AND CONDITION OF ALL DELIVERIES.
 3. TAKE RESPONSIBILITY FOR EQUIPMENT AND PROVIDE INSURANCE PROTECTION AS REQUIRED IN AGREEMENT.
 4. RECORD ANY DEFECTS OR DAMAGES AND WITHIN TWENTY-FOUR HOURS AFTER RECEIPT, REPORT TO SPRINT OR ITS DESIGNATED PROJECT REPRESENTATIVE OF SUCH.
 5. PROVIDE SECURE AND NECESSARY WEATHER PROTECTED WAREHOUSING.
 6. COORDINATE SAFE AND SECURE TRANSPORTATION OF MATERIAL AND EQUIPMENT, DELIVERING AND OFF-LOADING FROM CONTRACTOR'S WAREHOUSE TO SITE.

3.2 **DELIVERABLES:**

- A. COMPLETE SHIPPING AND RECEIPT DOCUMENTATION IN ACCORDANCE WITH COMPANY PRACTICE.
- B. IF APPLICABLE, COMPLETE LOST/STOLEN/DAMAGED DOCUMENTATION REPORT AS NECESSARY IN ACCORDANCE WITH COMPANY PRACTICE, AND AS DIRECTED BY COMPANY.
- C. UPLOAD DOCUMENTATION INTO SPRINT SITE MANAGEMENT SYSTEM (SMS) AND/OR PROVIDE HARD COPY DOCUMENTATION AS REQUESTED.

SECTION 01 300 – CELL SITE CONSTRUCTION

PART 1 – GENERAL

1.1 **THE WORK:** THESE STANDARD CONSTRUCTION SPECIFICATIONS IN CONJUNCTION WITH THE OTHER CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

1.2 **RELATED DOCUMENTS:**

- A. THE REQUIREMENTS OF THIS SECTION APPLY TO ALL SECTIONS IN THIS SPECIFICATION.
- B. SPRINT "STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES" ARE INCLUDED IN AND MADE A PART OF THESE SPECIFICATIONS HERewith.

1.3 **NOTICE TO PROCEED:**

- A. NO WORK SHALL COMMENCE PRIOR TO COMPANY'S WRITTEN NOTICE TO PROCEED AND THE ISSUANCE OF THE WORK ORDER.
- B. UPON RECEIVING NOTICE TO PROCEED, CONTRACTOR SHALL FULLY PERFORM ALL WORK NECESSARY TO PROVIDE SPRINT WITH AN OPERATIONAL WIRELESS FACILITY.

PART 2 – PRODUCTS (NOT USED)



PART 3 – EXECUTION

3.1 **FUNCTIONAL REQUIREMENTS:**

- A. THE ACTIVITIES DESCRIBED IN THIS PARAGRAPH REPRESENT MINIMUM ACTIONS AND PROCESSES REQUIRED TO SUCCESSFULLY COMPLETE THE WORK. THE ACTIVITIES DESCRIBED ARE NOT EXHAUSTIVE, AND CONTRACTOR SHALL TAKE ANY AND ALL ACTIONS AS NECESSARY TO SUCCESSFULLY COMPLETE THE CONSTRUCTION OF A FULLY FUNCTIONING WIRELESS FACILITY AT THE SITE IN ACCORDANCE WITH COMPANY PROCESSES.
- B. SUBMIT SPECIFIC DOCUMENTATION AS INDICATED HEREIN, AND OBTAIN REQUIRED APPROVALS WHILE THE WORK IS BEING PERFORMED.
- C. MANAGE AND CONDUCT ALL FIELD CONSTRUCTION SERVICE RELATED ACTIVITIES
- D. PROVIDE CONSTRUCTION ACTIVITIES TO THE EXTENT REQUIRED BY THE CONTRACT DOCUMENTS, INCLUDING BUT NOT LIMITED TO THE FOLLOWING:
 1. PERFORM ANY REQUIRED SITE ENVIRONMENTAL MITIGATION.
 2. PREPARE GROUND SITES; PROVIDE DE-GRUBBING; AND ROUGH AND FINAL GRADING, AND COMPOUND SURFACE TREATMENTS.
 3. MANAGE AND CONDUCT ALL ACTIVITIES FOR INSTALLATION OF UTILITIES INCLUDING ELECTRICAL AND TELCO BACKHAUL.
 4. INSTALL UNDERGROUND FACILITIES INCLUDING UNDERGROUND POWER AND COMMUNICATIONS CONDUITS, AND UNDERGROUND GROUNDING SYSTEM.
 5. INSTALL ABOVE GROUND GROUNDING SYSTEMS.
 6. PROVIDE NEW HVAC INSTALLATIONS AND MODIFICATIONS.
 7. INSTALL "H-FRAMES", CABINETS AND SHELTERS AS INDICATED.
 8. INSTALL ROADS, ACCESS WAYS, CURBS AND DRAINS AS INDICATED.
 9. ACCOMPLISH REQUIRED MODIFICATION OF EXISTING FACILITIES.
 10. PROVIDE ANTENNA SUPPORT STRUCTURE FOUNDATIONS.
 11. PROVIDE SLABS AND EQUIPMENT PLATFORMS.
 12. INSTALL COMPOUND FENCING, SIGHT SHIELDING, LANDSCAPING AND ACCESS BARRIERS.
 13. PERFORM INSPECTION AND MATERIAL TESTING AS REQUIRED HEREINAFTER.
 14. CONDUCT SITE RESISTANCE TO EARTH TESTING AS REQUIRED HEREINAFTER
 15. INSTALL FIXED GENERATOR SETS AND OTHER STANDBY POWER SOLUTIONS.
 16. INSTALL TOWERS, ANTENNA SUPPORT STRUCTURES AND PLATFORMS ON EXISTING TOWERS AS REQUIRED.
 17. INSTALL CELL SITE RADIOS, MICROWAVE, GPS, COAXIAL MAINLINE, ANTENNAS, CROSS BAND COUPLERS, TOWER TOP AMPLIFIERS, LOW NOISE AMPLIFIERS AND RELATED EQUIPMENT.
 18. PERFORM, DOCUMENT, AND CLOSE OUT ANY CONSTRUCTION CONTROL DOCUMENTS THAT MAY BE REQUIRED BY GOVERNMENT AGENCIES AND LANDLORDS.
 19. PERFORM ANTENNAL AND COAX SWEEP TESTING AND MAKE ANY AND ALL NECESSARY CORRECTIONS.
 20. REMAIN ON SITE MOBILIZED THROUGHOUT HAND-OFF AND INTEGRATION TO ASSIST AS NEEDED UNTIL SITE IS DEEMED SUBSTANTIALLY COMPLETE AND PLACED "ON AIR."

3.2 **GENERAL REQUIREMENTS FOR CIVIL CONSTRUCTION:**

- A. CONTRACTOR SHALL KEEP THE SITE FREE FROM ACCUMULATING WASTE MATERIAL, DEBRIS, AND TRASH. AT THE COMPLETION OF THE WORK, CONTRACTOR SHALL REMOVE FROM THE SITE ALL REMAINING RUBBISH, IMPLEMENTS, TEMPORARY FACILITIES, AND SURPLUS MATERIALS.
 - B. EQUIPMENT ROOMS SHALL AT ALL TIMES BE MAINTAINED "BROOM CLEAN" AND CLEAR OF DEBRIS.
 - C. CONTRACTOR SHALL TAKE ALL REASONABLE PRECAUTIONS TO DISCOVER AND LOCATE ANY HAZARDOUS CONDITION.
 1. IN THE EVENT CONTRACTOR ENCOUNTERS ANY HAZARDOUS CONDITION WHICH HAS NOT BEEN ABATED OR OTHERWISE MITIGATED, CONTRACTOR AND ALL OTHER PERSONS SHALL IMMEDIATELY STOP WORK IN THE AFFECTED AREA AND NOTIFY COMPANY IN WRITING. THE WORK IN THE AFFECTED AREA SHALL NOT BE RESUMED EXCEPT BY WRITTEN NOTIFICATION BY COMPANY.
 2. CONTRACTOR AGREES TO USE CARE WHILE ON THE SITE AND SHALL NOT TAKE ANY ACTION THAT WILL OR MAY RESULT IN OR CAUSE THE HAZARDOUS CONDITION TO BE FURTHER RELEASED IN THE ENVIRONMENT, OR TO FURTHER EXPOSE INDIVIDUALS TO THE HAZARD.
 - D. CONTRACTOR'S ACTIVITIES SHALL BE RESTRICTED TO THE PROJECT LIMITS. SHOULD AREAS OUTSIDE THE PROJECT LIMITS BE AFFECTED BY CONTRACTOR'S ACTIVITIES, CONTRACTOR SHALL IMMEDIATELY RETURN THEM TO ORIGINAL CONDITION
 - E. CONDUCT TESTING AS REQUIRED HEREIN.
- 3.3 **DELIVERABLES:**
- A. CONTRACTOR SHALL REVIEW, APPROVE, AND SUBMIT TO SPRINT SHOP DRAWINGS, PRODUCT DATA, SAMPLES, AND SIMILAR SUBMITTALS AS REQUIRED HEREINAFTER
 - B. PROVIDE DOCUMENTATION INCLUDING, BUT NOT LIMITED TO, THE FOLLOWING. DOCUMENTATION SHALL BE FORWARDED IN ORIGINAL FORMAT AND/OR UPLOADED INTO SMS.
 1. ALL CORRESPONDENCE AND PRELIMINARY CONSTRUCTION REPORTS.
 2. PROJECT PROGRESS REPORTS.
 3. CIVIL CONSTRUCTION START DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 4. ELECTRICAL SERVICE COMPLETION DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 5. LINES AND ANTENNA INSTALL DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 6. POWER INSTALL DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 7. TELCO READY DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 8. PPC (OR SHELTER) INSTALL DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 9. TOWER CONSTRUCTION START DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 10. TOWER CONSTRUCTION COMPLETE DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 11. BTS AND RADIO EQUIPMENT DELIVERED AT SITE DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 12. NETWORK OPERATIONS HANDOFF CHECKLIST (HOC WALK) COMPLETE (UPLOAD FORM IN SMS)
 13. CIVIL CONSTRUCTION COMPLETE DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 14. SITE CONSTRUCTION PROGRESS PHOTOS UNLOADED INTO SMS. **CONTINUE SHEET SP-2**

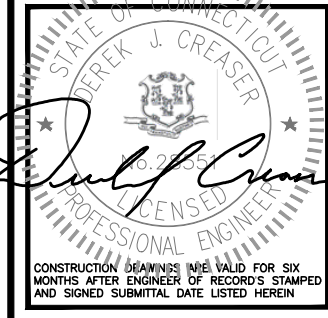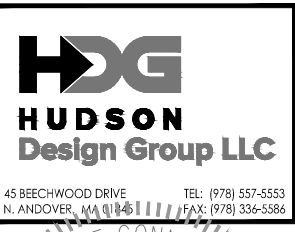

CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS			
REV.	DATE	DESCRIPTION	BY
1	07/25/18	CONSTRUCTION FINAL	GA
0	01/23/18	ISSUED FOR CONSTRUCTION	AN

SITE NUMBER:
CT33XC551
SITE NAME:
**N. COVENTRY/
WALLBEOFF**
CROWN BU NUMBER:
876385
SITE ADDRESS:
**REILLY MTN. RD.
COVENTRY, CT 06238
TOLLAND COUNTY**

SHEET TITLE
**OUTLINE
SPECIFICATIONS
(DO MIMO REDESIGN)**

SHEET NUMBER
SP-1

CONTINUED FROM SP-2:

MATERIALS:

A. MANUFACTURERS: BENJAMIN MOORE, ICI DEVOE COATINGS, PPG, SHERWIN WILLIAMS OR APPROVED EQUAL. PROVIDE PREMIUM GRADE, PROFESSIONAL-QUALITY PRODUCTS FOR COATING SYSTEMS.

PAINT SCHEDULE:

A. EXTERIOR ANTENNAE AND ANTENNA MOUNTING HARDWARE: ONE COAT OF PRIMER AND TWO FINISH COATS. PAINT FOR ANTENNAE SHALL BE NON-METALLIC BASED AND CONTAIN NO METALLIC PARTICLES. PROVIDE COLORS AND PATTERNS AS REQUIRED TO MASK APPEARANCE OF ANTENNAE ON ADJACENT BUILDING SURFACES AND AS ACCEPTABLE TO THE OWNER. REFER TO ANTENNA MANUFACTURER'S INSTRUCTIONS WHENEVER POSSIBLE.

B. ROOF TOP CONSTRUCTION: TOUCH UP - PREPARE SURFACES TO BE REPAIRED. FOLLOW INDUSTRY STANDARDS AND REQUIREMENTS OF OWNER TO MATCH EXISTING COATING AND FINISH.

PAINTING APPLICATION:

- 1. INSPECT SURFACES, REPORT UNSATISFACTORY CONDITIONS IN WRITING; BEGINNING WORK MEANS ACCEPTANCE OF SUBSTRATE.
2. COMPLY WITH MANUFACTURER'S INSTRUCTIONS AND RECOMMENDATIONS FOR PREPARATION, PRIMING AND COATING WORK. COORDINATE WITH WORK OF OTHER SECTIONS.
3. MATCH APPROVED MOCK-UPS FOR COLOR, TEXTURE, AND PATTERN. RE-COAT OR REMOVE AND REPLACE WORK WHICH DOES NOT MATCH OR SHOWS LOSS OF ADHESION.
4. CLEAN UP, TOUCH UP AND PROTECT WORK.

TOUCHUP PAINTING:

- 1. GALVANIZING DAMAGE AND ALL BOLTS AND NUTS SHALL BE TOUCHED UP AFTER TOWER ERECTION WITH "GALVANOX," "DRY GALV," OR "ZINC-IT."
2. FIELD TOUCHUP PAINT SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURER'S WRITTEN INSTRUCTIONS.
3. ALL METAL COMPONENTS SHALL BE HANDLED WITH CARE TO PREVENT DAMAGE TO THE COMPONENTS, THEIR PRESERVATIVE TREATMENT, OR THEIR PROTECTIVE COATINGS.

SECTION 11 700 - ANTENNA ASSEMBLY, REMOTE RADIO HEADS AND CABLE INSTALLATION

SUMMARY:

THIS SECTION SPECIFIES INSTALLATION OF ANTENNAS, RRH'S, AND CABLE EQUIPMENT, INSTALLATION, AND TESTING OF COAXIAL FIBER CABLE.

ANTENNAS AND RRH'S:

THE NUMBER AND TYPE OF ANTENNAS AND RRH'S TO BE INSTALLED IS DETAILED ON THE CONSTRUCTION DRAWINGS.

HYBRID CABLE:

HYBRID CABLE WILL BE DC/FIBER AND FURNISHED FOR INSTALLATION AT EACH SITE. CABLE SHALL BE INSTALLED PER THE CONSTRUCTION DRAWINGS AND THE APPLICABLE MANUFACTURER'S REQUIREMENTS.

JUMPERS AND CONNECTORS:

FURNISH AND INSTALL 1/2" COAX JUMPER CABLES BETWEEN THE RRH'S AND ANTENNAS. JUMPERS SHALL BE TYPE LDF 4, FLC 12-50, CR 540, OR FXL 540. SUPER-FLEX CABLES ARE NOT ACCEPTABLE. JUMPERS BETWEEN THE RRH'S AND ANTENNAS OR TOWER TOP AMPLIFIERS SHALL CONSIST OF 1/2 INCH FOAM DIELECTRIC, OUTDOOR RATED COAXIAL CABLE. DO NOT USE SUPERFLEX OUTDOORS. JUMPERS SHALL BE FACTORY FABRICATED IN APPROPRIATE LENGTHS WITH A MAXIMUM OF 4 FEET EXCESS PER JUMPER AND HAVE CONNECTORS AT EACH END, MANUFACTURED BY SUPPLIER. IF JUMPERS ARE FIELD FABRICATED, FOLLOW MANUFACTURER'S REQUIREMENTS FOR INSTALLATION OF CONNECTORS

REMOTE ELECTRICAL TILT (RET) CABLES:

MISCELLANEOUS:

INSTALL SPLITTERS, COMBINERS, FILTERS PER RF DATA SHEET, FURNISHED BY SPRINT.

ANTENNA INSTALLATION:

THE CONTRACTOR SHALL ASSEMBLE ALL ANTENNAS ONSITE IN ACCORDANCE WITH THE INSTRUCTIONS SUPPLIED BY THE MANUFACTURER. ANTENNA HEIGHT, AZIMUTH, AND FEED ORIENTATION INFORMATION SHALL BE A DESIGNATED ON THE CONSTRUCTION DRAWINGS.

- A. THE CONTRACTOR SHALL POSITION THE ANTENNA ON TOWER PIPE MOUNTS SO THAT THE BOTTOM STRUT IS LEVEL. THE PIPE MOUNTS SHALL BE PLUMB TO WITHIN 1 DEGREE.
B. ANTENNA MOUNTING REQUIREMENTS: PROVIDE ANTENNA MOUNTING HARDWARE AS INDICATED ON THE DRAWINGS.

HYBRID CABLES INSTALLATION:

- A. THE CONTRACTOR SHALL ROUTE, TEST, AND INSTALL ALL CABLES AS INDICATED ON THE CONSTRUCTION DRAWINGS AND IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
B. THE INSTALLED RADIUS OF THE CABLES SHALL NOT BE LESS THAN THE MANUFACTURER'S SPECIFICATIONS FOR BENDING RADII.
C. EXTREME CARE SHALL BE TAKEN TO AVOID DAMAGE TO THE CABLES DURING HANDLING AND INSTALLATION.
1. FASTENING MAIN HYBRID CABLES: ALL CABLES SHALL BE PERMANENTLY FASTENED TO THE COAX LADDER AT 4'-0" OC USING NON-MAGNETIC STAINLESS STEEL CLIPS.
2. FASTENING INDIVIDUAL FIBER AND DC CABLES ABOVE BREAKOUT ENCLOSURE (MEDUSA), WITHIN THE MMBTS CABINET AND ANY INTERMEDIATE DISTRIBUTION BOXES:
a. FIBER: SUPPORT FIBER BUNDLES USING 1/2" VELCRO STRAPS OF THE REQUIRED LENGTH @ 18" OC. STRAPS SHALL BE UV, OIL AND WATER RESISTANT AND SUITABLE FOR INDUSTRIAL INSTALLATIONS AS MANUFACTURED BY TEXTOL OR APPROVED EQUAL.
b. DC: SUPPORT DC BUNDLES WITH ZIP TIES OF THE ADEQUATE LENGTH. ZIP TIES TO BE UV STABILIZED, BLACK NYLON, WITH TENSILE STRENGTH AT 12,000 PSI AS MANUFACTURED BY NELCO PRODUCTS OR EQUAL.
3. FASTENING JUMPERS: SECURE JUMPERS TO THE SIDE ARMS OR HEAD FRAMES USING STAINLESS STEEL TIE WRAPS OR STAINLESS STEEL BUTTERFLY CLIPS.
4. CABLE INSTALLATION:
a. INSPECT CABLE PRIOR TO USE FOR SHIPPING DAMAGE, NOTIFY THE CONSTRUCTION MANAGER.
b. CABLE ROUTING: CABLE INSTALLATION SHALL BE PLANNED TO ENSURE THAT THE LINES WILL BE PROPERLY ROUTED IN THE CABLE ENVELOPE AS INDICATED ON THE DRAWINGS. AVOID TWISTING AND CROSSOVERS.
c. HOIST CABLE USING PROPER HOISTING GRIPS. DO NOT EXCEED MANUFACTURERS RECOMMENDED MAXIMUM BEND RADIUS.

- 5. GROUNDING OF TRANSMISSION LINES: ALL TRANSMISSION LINES SHALL BE GROUNDING AS INDICATED ON DRAWINGS.
6. HYBRID CABLE COLOR CODING: ALL COLOR CODING SHALL BE AS REQUIRED IN TS 0200 REV 4.
7. HYBRID CABLE LABELING: INDIVIDUAL HYBRID AND DC BUNDLES SHALL BE LABELED ALPHA-NUMERICALLY ACCORDING TO SPRINT CELL SITE ENGINEERING NOTICE - EN 2012-001, REV 1

WEATHERPROOFING EXTERIOR CONNECTORS AND HYBRID CABLE GROUND KITS:

- A. ALL FIBER & COAX CONNECTORS AND GROUND KITS SHALL BE WEATHERPROOFED.
B. WEATHERPROOFED USING ONE OF THE FOLLOWING METHODS. ALL INSTALLATIONS MUST BE DONE IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND INDUSTRY BEST PRACTICES.
1. COLD SHRINK: ENCOMPASS CONNECTOR IN COLD SHRINK TUBING AND PROVIDE A DOUBLE WRAP OF 2" ELECTRICAL TAPE EXTENDING 2" BEYOND TUBING. PROVIDE 3M COLD SHRINK CXS SERIES OR EQUAL.
2. SELF-AMALGAMATING TAPE: CLEAN SURFACES. APPLY A DOUBLE WRAP OF SELF-AMALGAMATING TAPE 2" BEYOND CONNECTOR. APPLY A SECOND WRAP OF SELF-AMALGAMATING TAPE IN OPPOSITE DIRECTION. APPLY DOUBLE WRAP OF 2" WIDE ELECTRICAL TAPE EXTENDING 2" BEYOND THE SELF-AMALGAMATING TAPE.
3. 3M SLIM LOCK CLOSURE 716: SUBSTITUTIONS WILL NOT BE ALLOWED.
4. OPEN FLAME ON JOB SITE IS NOT ACCEPTABLE

SECTION 11 800 - INSTALLATION OF MULTIMODAL BASE STATIONS (MMBTS) AND RELATED EQUIPMENT

SUMMARY:

- A. THIS SECTION SPECIFIES MMBTS CABINETS, POWER CABINETS, AND INTERNAL EQUIPMENT INCLUDING BY NOT LIMITED TO RECTIFIERS, POWER DISTRIBUTION UNITS, BASE BAND UNITS, SURGE ARRESTORS, BATTERIES, AND SIMILAR EQUIPMENT FURNISHED BY THE COMPANY FOR INSTALLATION BY THE CONTRACTOR (OFCI).
B. CONTRACTOR SHALL PROVIDE AND INSTALL ALL MISCELLANEOUS MATERIALS AND PROVIDE ALL LABOR REQUIRED FOR INSTALLATION EQUIPMENT IN EXISTING CABINET OR NEW CABINET AS SHOWN ON DRAWINGS AND AS REQUIRE BY THE APPLICABLE INSTALLATION MOPS.
C. COMPLY WITH MANUFACTURERS INSTALLATION AND START-UP REQUIREMENTS

DC CIRCUIT BREAKER LABELING

- A. LABEL CIRCUIT BREAKERS ACCORDING TO SPRINT CELL SITE ENGINEERING NOTICE - EN 2012-001, REV 1.

SECTION 11 800 - INSTALLATION OF MULTIMODAL BASE TRANSCIEVER STATIONS (MMBTS) AND RELATED EQUIPMENT

SUMMARY:

- A. THIS SECTION SPECIFIES MMBTS CABINETS, POWER CABINETS, AND INTERNAL EQUIPMENT INCLUDING BY NOT LIMITED TO RECTIFIERS, POWER DISTRIBUTION UNITS, BASE BAND UNITS, SURGE ARRESTORS, BATTERIES, AND SIMILAR EQUIPMENT FURNISHED BY THE COMPANY FOR INSTALLATION BY THE CONTRACTOR (OFCI).
B. CONTRACTOR SHALL PROVIDE AND INSTALL ALL MISCELLANEOUS MATERIALS AND PROVIDE ALL LABOR REQUIRED FOR INSTALLATION EQUIPMENT IN EXISTING CABINET OR NEW CABINET AS SHOWN ON DRAWINGS AND AS REQUIRE BY THE APPLICABLE INSTALLATION MOPS.
C. COMPLY WITH MANUFACTURERS INSTALLATION AND START-UP REQUIREMENTS

SUPPORTING DEVICES:

- A. MANUFACTURED STRUCTURAL SUPPORT MATERIALS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS BY THE FOLLOWING:
1. ALLIED TUBE AND CONDUIT
2. B-LINE SYSTEM
3. UNISTRUT DIVERSIFIED PRODUCTS
4. THOMAS & BETTS
B. FASTENERS: TYPES, MATERIALS, AND CONSTRUCTION FEATURES AS FOLLOWS:
1. EXPANSION ANCHORS: CARBON STEEL WEDGE OR SLEEVE TYPE.
2. POWER-DRIVEN THREADED STUDS: HEAT-TREATED STEEL, DESIGNED SPECIFICALLY FOR THE INTENDED SERVICE.
3. FASTEN BY MEANS OF WOOD SCREWS ON WOOD.
4. TOGGLE BOLTS ON HOLLOW MASONRY UNITS.
5. CONCRETE INSERTS OR EXPANSION BOLTS ON CONCRETE OR SOLID MASONRY.
6. MACHINE SCREWS, WELDED THREADED STUDS, OR SPRING-TENSION CLAMPS ON STEEL.
7. EXPLOSIVE DEVICES FOR ATTACHING HANGERS TO STRUCTURE SHALL NOT BE PERMITTED.
8. DO NOT WELD CONDUIT, PIPE STRAPS, OR ITEMS OTHER THAN THREADED STUDS TO STEEL STRUCTURES.
9. IN PARTITIONS OF LIGHT STEEL CONSTRUCTION, USE SHEET METAL SCREWS.

SUPPORTING DEVICES:

- A. INSTALL SUPPORTING DEVICES TO FASTEN ELECTRICAL COMPONENTS SECURELY AND PERMANENTLY IN ACCORDANCE WITH NEC.
B. COORDINATE WITH THE BUILDING STRUCTURAL SYSTEM AND WITH OTHER TRADES.
C. UNLESS OTHERWISE INDICATED ON THE DRAWINGS, FASTEN ELECTRICAL ITEMS AND THEIR SUPPORTING HARDWARE SECURELY TO THE STRUCTURE IN ACCORDANCE WITH THE FOLLOWING:
D. ENSURE THAT THE LOAD APPLIED BY ANY FASTENER DOES NOT EXCEED 25 PERCENT OF THE PROOF TEST LOAD.
E. USE VIBRATION AND SHOCK-RESISTANT FASTENERS FOR ATTACHMENTS TO CONCRETE SLABS.

ELECTRICAL IDENTIFICATION:

- A. UPDATE AND PROVIDE TYPED CIRCUIT BREAKER SCHEDULES IN THE MOUNTING BRACKET, INSIDE DOORS OF AC PANEL BOARDS WITH ANY CHANGES MADE TO THE AC SYSTEM.
B. BRANCH CIRCUITS FEEDING AVIATION OBSTRUCTION LIGHTING EQUIPMENT SHALL BE CLEARLY IDENTIFIED AS SUCH AT THE BRANCH CIRCUIT PANELBOARD.

SECTION 26 200 - ELECTRICAL MATERIALS AND EQUIPMENT

CONDUIT:

- A. RIGID GALVANIZED STEEL (RGS) CONDUIT SHALL BE USED FOR EXTERIOR LOCATIONS ABOVE GROUND AND IN UNFINISHED INTERIOR LOCATIONS AND FOR ENCASED RUNS IN CONCRETE. RIGID CONDUIT AND FITTINGS SHALL BE STEEL, COATED WITH ZINC EXTERIOR AND INTERIOR BY THE HOT DIP GALVANIZING PROCESS. CONDUIT SHALL BE PRODUCED TO ANSI SPECIFICATIONS C80.1, FEDERAL SPECIFICATION WW-C-581 AND SHALL BE LISTED WITH THE UNDERWRITERS' LABORATORIES. FITTINGS SHALL BE THREADED - SET SCREW OR COMPRESSION FITTINGS WILL NOT BE ACCEPTABLE. RGS CONDUITS SHALL BE MANUFACTURED BY ALLIED, REPUBLIC OR WHEATLAND.
B. UNDERGROUND CONDUIT IN CONCRETE SHALL BE POLYVINYLCHLORIDE (PVC) SUITABLE FOR DIRECT BURIAL AS APPLICABLE. JOINTS SHALL BE BELLED, AND FLUSH SOLVENT WELDED IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS. CONDUIT SHALL BE CARLON ELECTRICAL PRODUCTS OR APPROVED EQUAL.
C. TRANSITIONS BETWEEN PVC AND RIGID (RGS) SHALL BE MADE WITH PVC COATED METALLIC LONG SWEEP RADIUS ELBOWS.
D. EMT OR RIGID GALVANIZED STEEL CONDUIT MAY BE USED IN FINISHED SPACES CONCEALED IN WALLS AND CEILINGS. EMT SHALL BE MILD STEEL, ELECTRICALLY WELDED, ELECTRO-GALVANIZED OR HOT-DIPPED GALVANIZED AND PRODUCED TO ANSI SPECIFICATION C80.3, FEDERAL SPECIFICATION WW-C-563, AND SHALL BE UL LISTED. EMT SHALL BE MANUFACTURED BY ALLIED, REPUBLIC OR WHEATLAND, OR APPROVED EQUAL. FITTINGS SHALL BE METALLIC COMPRESSION. SET SCREW CONNECTIONS SHALL NOT BE ACCEPTABLE.
E. LIQUID TIGHT FLEXIBLE METALLIC CONDUIT SHALL BE USED FOR FINAL CONNECTION TO EQUIPMENT. FITTINGS SHALL BE METALLIC GLAND TYPE COMPRESSION FITTINGS, MAINTAINING THE INTEGRITY OF CONDUIT SYSTEM. SET SCREW CONNECTIONS SHALL NOT BE ACCEPTABLE. MAXIMUM LENGTH OF FLEXIBLE CONDUIT SHALL NOT EXCEED 6- FEET. LFMC SHALL BE PROTECTED AND SUPPORTED AS REQUIRE BY NEC. MANUFACTURERS OF FLEXIBLE CONDUITS SHALL BE CAROL, ANACONDA METAL HOSE OR UNIVERSAL METAL HOSE, OR APPROVED EQUAL.
F. MINIMUM SIZE CONDUIT SHALL BE 3/4 INCH (21MM).

HUBS AND BOXES:

- A. AT ENTRANCES TO CABINETS OR OTHER EQUIPMENT NOT HAVING INTEGRAL THREADED HUBS PROVIDE METALLIC THREADED HUBS OF THE SIZE AND CONFIGURATION REQUIRED. HUB SHALL INCLUDE LOCKNUT AND NEOPRENE O-RING SEAL. PROVIDE IMPACT RESISTANT 105 DEGREE C PLASTIC BUSHINGS TO PROTECT CABLE INSULATION.
B. CABLE TERMINATION FITTINGS FOR CONDUIT
1. CABLE TERMINATORS FOR RGS CONDUITS SHALL BE TYPE CRC BY O-Z/GEDNEY OR EQUAL.
2. CABLE TERMINATORS FOR LFMC SHALL BE ETCO - CL2075; OR MADE FOR THE PURPOSE PRODUCTS BY ROXTEC.
C. EXTERIOR PULL BOXES AND PULL BOXES IN INTERIOR INDUSTRIAL AREAS SHALL BE PLATED CAST ALLOY, HEAVY DUTY, WEATHERPROOF, DUST PROOF, WITH GASKET, PLATED IRON ALLOY COVER AND STAINLESS STEEL COVER SCREWS, CROUSE-HINDS WAB SERIES OR EQUAL.
D. CONDUIT OUTLET BODIES SHALL BE PLATED CAST ALLOY WITH SIMILAR GASKETED COVERS. OUTLET BODIES SHALL BE OF THE CONFIGURATION AND SIZE SUITABLE FOR THE APPLICATION. PROVIDE CROUSE-HINDS FORM 8 OR EQUAL.
E. MANUFACTURER FOR BOXES AND COVERS SHALL BE HOFFMAN, SQUARE "D", CROUSE-HINDS, COOPER, ADALET, APPLETON, O-Z GEDNEY, RACO, OR APPROVED EQUAL.

SUPPLEMENTAL GROUNDING SYSTEM


- A. FURNISH AND INSTALL A SUPPLEMENTAL GROUNDING SYSTEM AS INDICATED ON THE DRAWINGS. SUPPORT SYSTEM WITH NON-MAGNETIC STAINLESS STEEL CLIPS WITH RUBBER GROMMETS. GROUNDING CONNECTORS SHALL BE TINNED COPPER WIRE, SIZES AS INDICATED ON THE DRAWINGS. PROVIDE STRANDED OR SOLID BARE OR INSULATED CONDUCTORS AS INDICATED.
B. SUPPLEMENTAL GROUNDING SYSTEM: ALL CONNECTIONS TO BE MADE WITH CAD WELDS, EXCEPT AT EQUIPMENT USE LUGS OR OTHER AVAILABLE GROUNDING MEANS AS REQUIRED BY MANUFACTURER; AT GROUND BARS USE TWO HOLE SPADES WITH NO OX.
C. STOLEN GROUND-BARS: IN THE EVENT OF STOLEN GROUND BARS, CONTACT SPRINT CM FOR REPLACEMENT INSTRUCTION USING THREADED ROD KITS.

EXISTING STRUCTURE:

- A. EXISTING EXPOSED WIRING AND ALL EXPOSED OUTLETS, RECEPTACLES, SWITCHES, DEVICES, BOXES, AND OTHER EQUIPMENT THAT ARE NOT TO BE UTILIZED IN THE COMPLETED PROJECT SHALL BE REMOVED OR DE-ENERGIZED AND CAPPED IN THE WALL, CEILING, OR FLOOR SO THAT THEY ARE CONCEALED AND SAFE. WALL, CEILING, OR FLOOR SHALL BE PATCHED TO MATCH THE ADJACENT CONSTRUCTION.

CONDUIT AND CONDUCTOR INSTALLATION:

- A. CONDUITS SHALL BE FASTENED SECURELY IN PLACE WITH APPROVED NON-PERFORATED STRAPS AND HANGERS. EXPLOSIVE DEVICES FOR ATTACHING HANGERS TO STRUCTURE WILL NOT BE PERMITTED. CLOSELY FOLLOW THE LINES OF THE STRUCTURE, MAINTAIN CLOSE PROXIMITY TO THE STRUCTURE AND KEEP CONDUITS IN TIGHT ENVELOPES. CHANGES IN DIRECTION TO ROUTE AROUND OBSTACLES SHALL BE MADE WITH CONDUIT OUTLET BODIES. CONDUIT SHALL BE INSTALLED IN A NEAT AND WORKMANLIKE MANNER, PARALLEL AND PERPENDICULAR TO STRUCTURE WALL AND CEILING LINES. ALL CONDUIT SHALL BE FISHED TO CLEAR OBSTRUCTIONS. ENDS OF CONDUITS SHALL BE TEMPORARILY CAPPED TO PREVENT CONCRETE, PLASTER OR DIRT FROM ENTERING. CONDUITS SHALL BE RIGIDLY CLAMPED TO BOXES BY GALVANIZED MALLEABLE IRON BUSHING ON INSIDE AND GALVANIZED MALLEABLE IRON LOCKNUT ON OUTSIDE AND INSIDE.
B. CONDUCTORS SHALL BE PULLED IN ACCORDANCE WITH ACCEPTED GOOD PRACTICE.

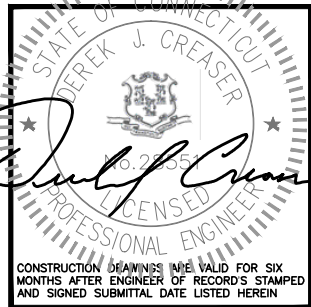

CHECKED BY: BB

APPROVED BY: DJC

Table with columns: REV, DATE, DESCRIPTION, BY. Row 1: 1, 07/25/18, CONSTRUCTION FINAL, GA. Row 2: 0, 01/23/18, ISSUED FOR CONSTRUCTION, AN.

SITE NUMBER: CT33XC551
SITE NAME: N. COVENTRY/WALLBEOFF
CROWN BU NUMBER: 876385
SITE ADDRESS: REILLY MTN. RD. COVENTRY, CT 06238 TOLLAND COUNTY

SHEET TITLE: OUTLINE SPECIFICATIONS (DO MIMO REDESIGN)

SHEET NUMBER: SP-3

NOTE:
REFER TO THE FINAL RF DATA SHEET FOR FINAL ANTENNA SETTINGS.

STRUCTURAL NOTE:
PRIOR TO COMMENCING CONSTRUCTION, GC SHALL REFER TO STRUCTURAL TOWER ANALYSIS PROVIDED BY CROWN CASTLE DATED JUNE 29, 2018 AND MOUNT STRUCTURAL ANALYSIS BY HUDSON DESIGN GROUP DATED JUNE 22, 2018 (REV.1) TO DETERMINE IF THERE ANY SUPPLEMENTAL OR SPECIAL INSTALLATION REQUIREMENTS, OR RELOCATION ARRANGEMENTS.

Sprint
1 INTERNATIONAL BLVD, SUITE 800
MAHWAH, NJ 07495
TEL: (800) 357-7641

CROWN CASTLE
CROWN CASTLE
12 GILL STREET, SUITE 5800
WOBBURN, MA 01801

HG HUDSON Design Group LLC
45 BEECHWOOD DRIVE N. ANDOVER, MA 01810
TEL: (978) 557-5553 FAX: (978) 336-5586

STATE OF CONNECTICUT
Derek J. Creaser
LICENSED PROFESSIONAL ENGINEER
CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMP AND SIGNED SUBMITTAL DATE LISTED HEREIN

CHECKED BY: BB

APPROVED BY: DJC






SUBMITTALS

REV.	DATE	DESCRIPTION	BY
1	07/25/18	CONSTRUCTION FINAL	GA
0	01/23/18	ISSUED FOR CONSTRUCTION	AN



SITE NUMBER: CT33XC551
SITE NAME: N. COVENTRY/WALLBEOFF
CROWN BU NUMBER: 876385
SITE ADDRESS: REILLY MTN. RD. COVENTRY, CT 06238 TOLLAND COUNTY

SHEET TITLE
COMPOUND PLAN & EQUIPMENT PLAN
(DO MIMO REDESIGN)


SHEET NUMBER
A-1

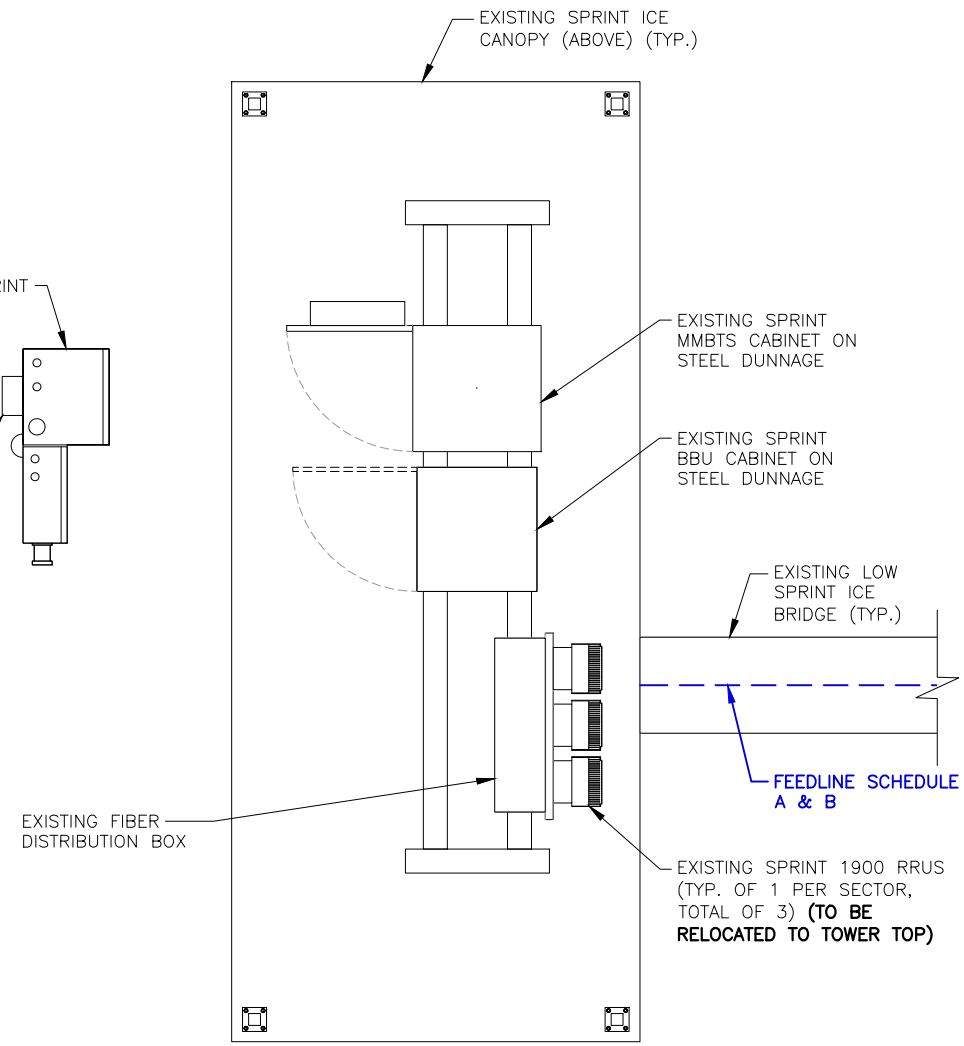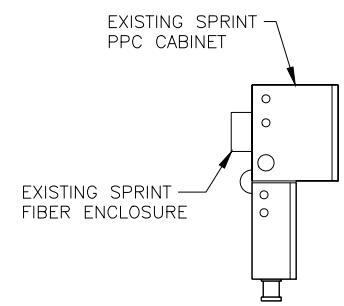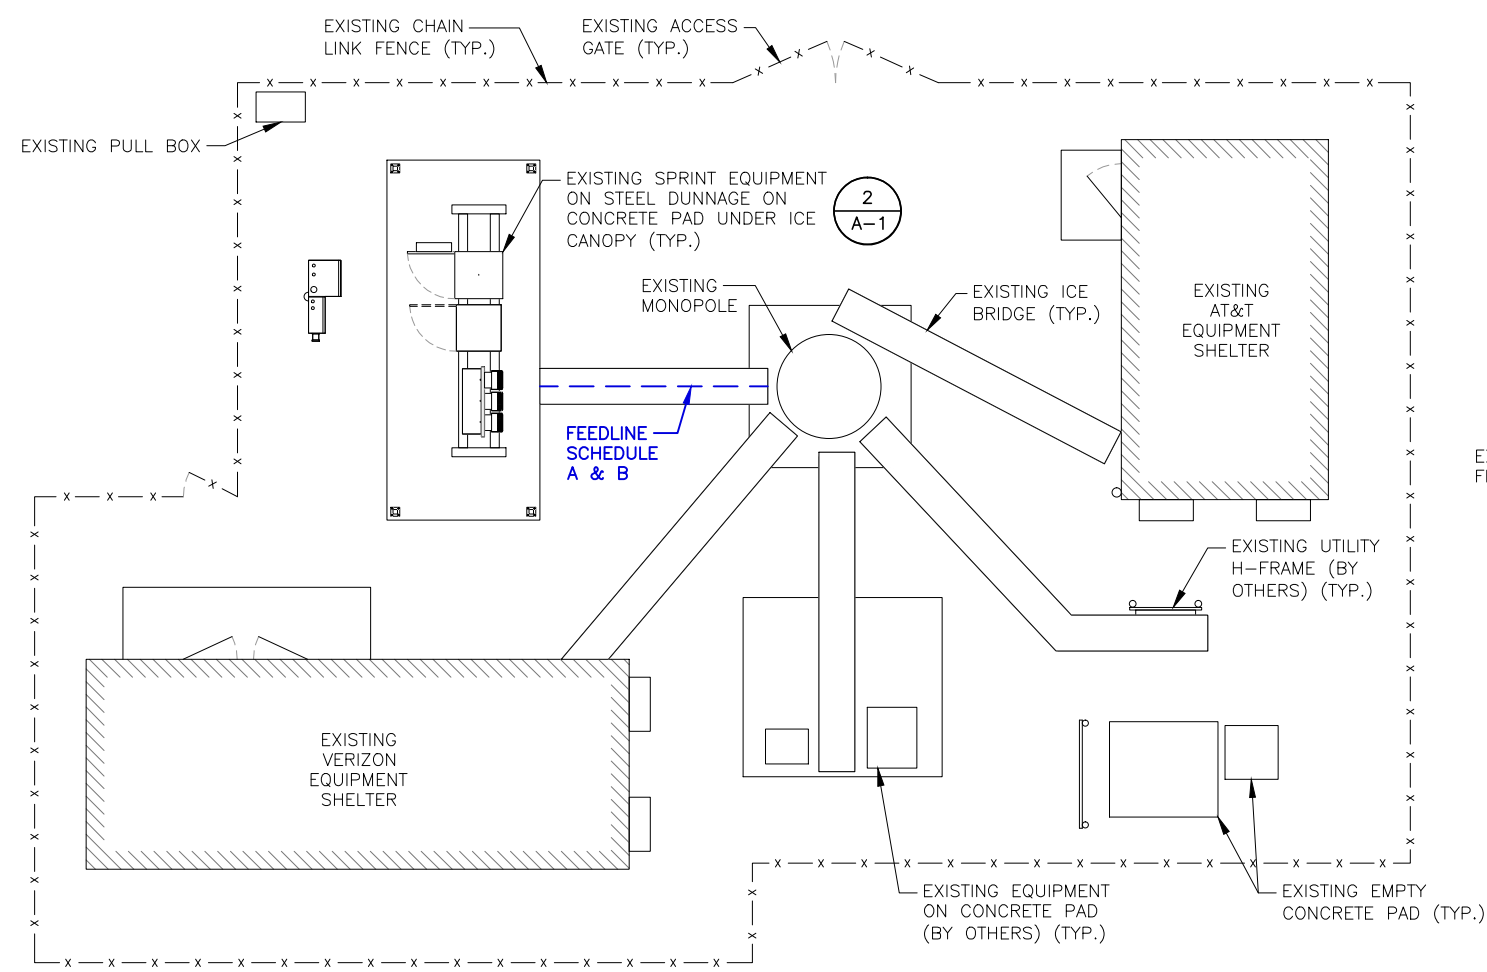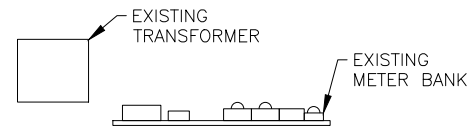


COMPOUND PLAN
22x34 SCALE: 3/16"=1'-0"
11x17 SCALE: 3/32"=1'-0"



EQUIPMENT PLAN
22x34 SCALE: 1/2"=1'-0"
11x17 SCALE: 1/4"=1'-0"



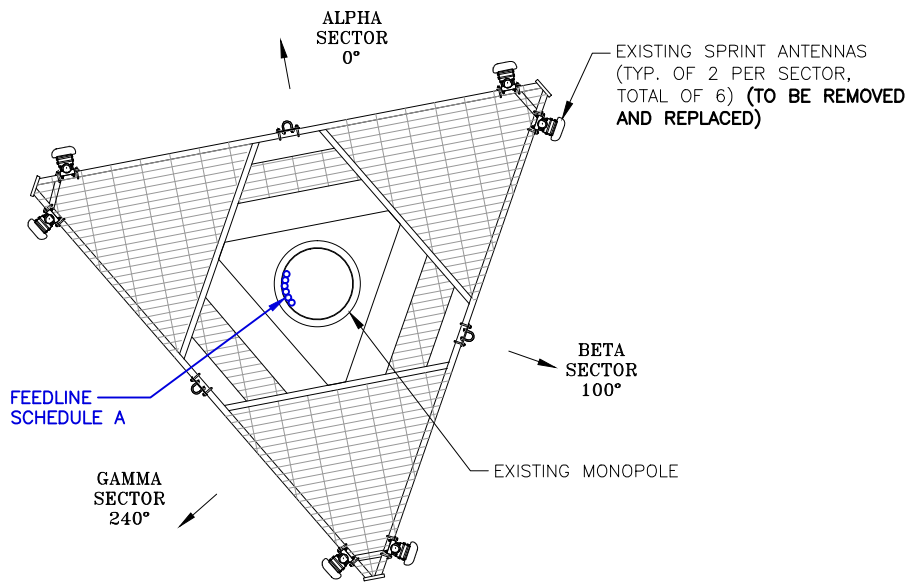

EXISTING ANTENNA PLAN (1)
22x34 SCALE: 3/8"=1'-0"
11x17 SCALE: 3/16"=1'-0"




NOTE:
REFER TO THE FINAL RF DATA SHEET FOR FINAL ANTENNA SETTINGS.

STRUCTURAL NOTE:
PRIOR TO COMMENCING CONSTRUCTION, GC SHALL REFER TO STRUCTURAL TOWER ANALYSIS PROVIDED BY CROWN CASTLE DATED JUNE 29, 2018 AND MOUNT STRUCTURAL ANALYSIS BY HUDSON DESIGN GROUP DATED JUNE 22, 2018 (REV.1) TO DETERMINE IF THERE ANY SUPPLEMENTAL OR SPECIAL INSTALLATION REQUIREMENTS, OR RELOCATION ARRANGEMENTS.

STRUCTURAL NOTE:
DESIGN LIMITATIONS AND ASSUMPTIONS:
1. EQUIPMENT AND LOCATIONS SHOULD NOT DEVIATE FROM THE CONSTRUCTION DRAWINGS WITHOUT WRITTEN APPROVAL OF THE ENGINEER.
2. HDG IS NOT RESPONSIBLE FOR ANY MODIFICATIONS COMPLETED PRIOR TO AND HEREAFTER WHICH HDG WAS NOT INVOLVED.
3. ALL STRUCTURAL MEMBERS AND THEIR CONNECTIONS ARE ASSUMED TO BE IN GOOD CONDITION AND ARE FREE FROM DEFECTS WITH NO DETERIORATION TO ITS MEMBER CAPACITIES. CONTRACTOR IS TO PERFORM A PRE-INSPECTION TO CONFIRM.
4. ALL ANTENNAS, COAX CABLES AND WAVEGUIDE CABLES ARE ASSUMED TO BE PROPERLY INSTALLED AND SUPPORTED AS PER THE MANUFACTURER'S REQUIREMENTS.
5. ALL COMPONENTS SUPPORTING THE SPRINT EQUIPMENT ARE ASSUMED TO BE DESIGNED TO ALL APPLICABLE CODES AND DESIGNED FOR IDENTICAL TO OR GREATER THAN THE CURRENT LOADS.

SCOPE NOTE:
PROPOSED DESIGN IS BASED OFF OF CROWN APPLICATION REV 0 DATED 05/21/18

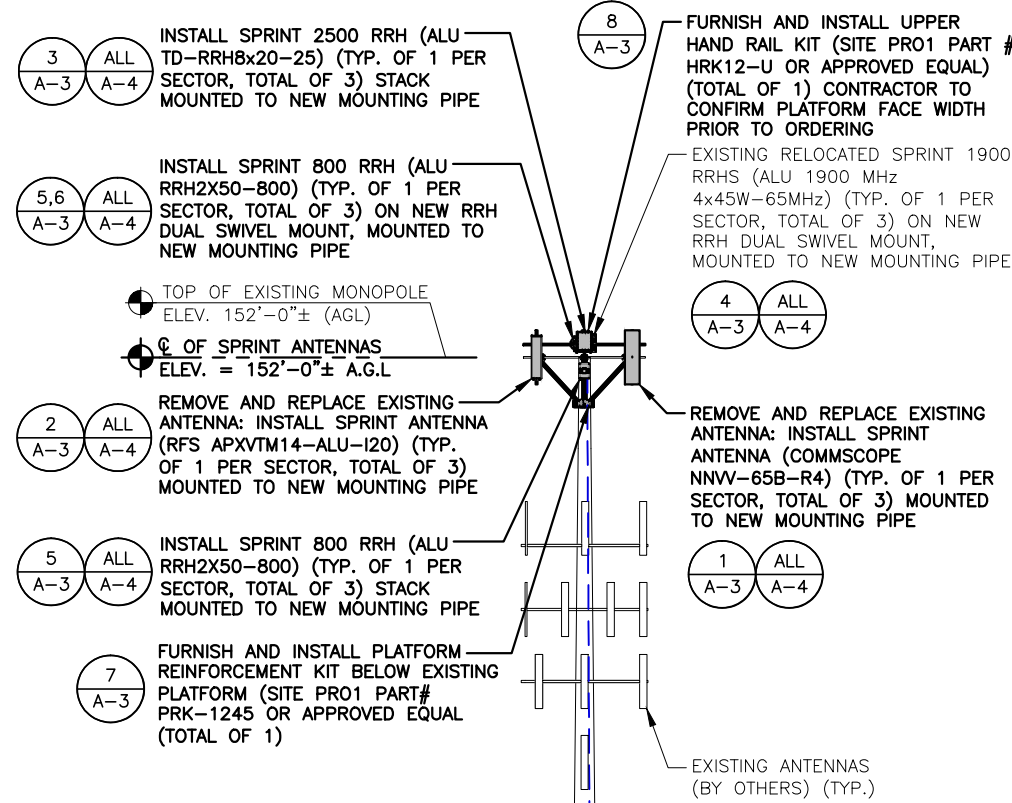

EXISTING SPRINT GPS ANTENNA
ELEV. 74'-0"± (AGL)

GROUND LEVEL
ELEV. 0'-0"± (AGL)

FEEDLINES			
FEEDLINE SCHEDULE	FEEDLINE DESCRIPTION	LOCATION	LENGTH
A	EXISTING TO BE REMOVED: (6) 1-5/8" COAX EXISTING TO REMAIN: (1) 1/2" COAX	ROUTED WITHIN MONOPOLE	ALPHA: 200'± BETA: 200'± GAMMA: 200'±
B	PROPOSED (4) 1-1/4" HYBRID TRUNKS		

NOTE:
EXISTING SPRINT EQUIPMENT FEEDLINE INVENTORY BASED ON OBSERVED FIELD CONDITIONS, RFDS AND FEEDLINE LEASING ENTITLEMENTS MAY DIFFER.

NOTE:
GROUND LEVEL EQUIPMENT NOT SHOWN FOR CLARITY


CHECKED BY: BB
APPROVED BY: DJC

SUBMITTALS			
REV.	DATE	DESCRIPTION	BY
1	07/25/18	CONSTRUCTION FINAL	GA
0	01/23/18	ISSUED FOR CONSTRUCTION	AN

SITE NUMBER: CT33XC551
SITE NAME: N. COVENTRY/WALLBEOFF
CROWN BU NUMBER: 876385
SITE ADDRESS: REILLY MTN. RD. COVENTRY, CT 06238 TOLLAND COUNTY

SHEET TITLE
ANTENNA PLANS & ELEVATION
(DO MIMO REDESIGN)


SHEET NUMBER
A-2

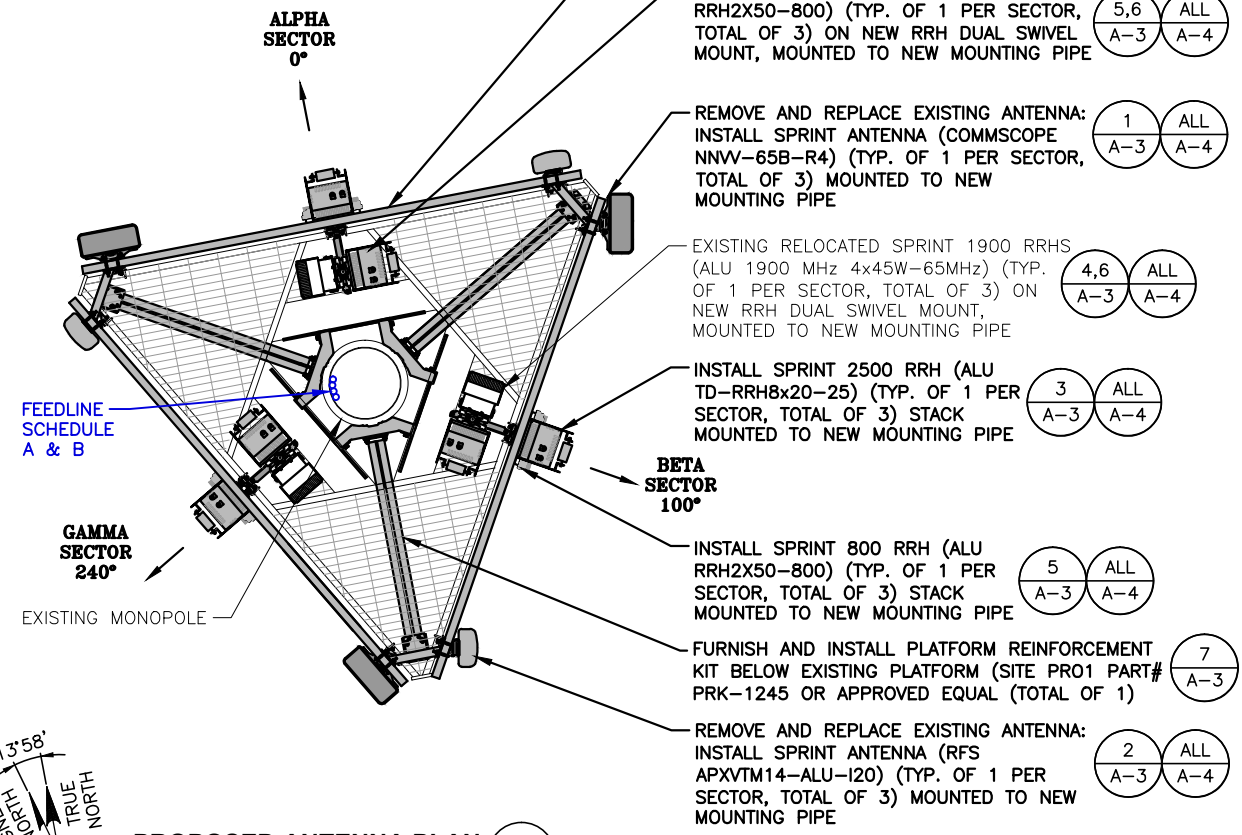

PROPOSED ANTENNA PLAN (2)
22x34 SCALE: 3/8"=1'-0"
11x17 SCALE: 3/16"=1'-0"



ELEVATION (3)
22x34 SCALE: 3/32"=1'-0"
11x17 SCALE: 3/64"=1'-0"



CHECKED BY: BB

APPROVED BY: DJC


SUBMITTALS			
REV.	DATE	DESCRIPTION	BY
1	07/25/18	CONSTRUCTION FINAL	GA
0	01/23/18	ISSUED FOR CONSTRUCTION	AN

SITE NUMBER: CT33XC551
 SITE NAME: N. COVENTRY/
 WALLBEOFF
 CROWN BU NUMBER: 876385
 SITE ADDRESS: REILLY MTN. RD.
 COVENTRY, CT 06238
 TOLLAND COUNTY

SHEET TITLE
 EQUIPMENT DETAILS
 (DO MIMO REDESIGN)


SHEET NUMBER
A-3

800/1900 MHZ ANTENNA DIMENSIONS	
MODEL #	NNV-65B-R4
MANUF.	COMMSCOPE
HEIGHT	72.0"
WIDTH	19.6"
DEPTH	7.8"
WEIGHT	77.4 LBS

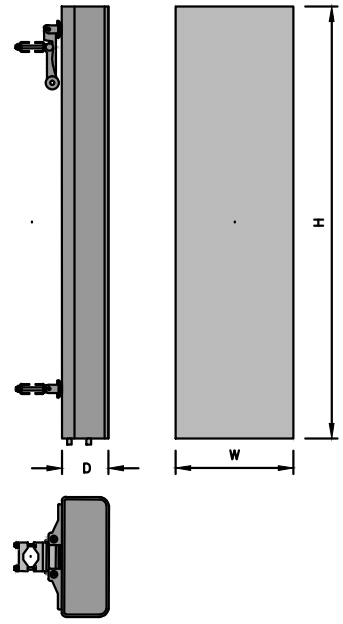


800/1900 MHZ ANTENNA DETAIL 1
 SCALE: N.T.S. A-3

2.5MHZ ANTENNA DIMENSIONS	
MODEL #	APXVTM14-ALU-120
MANUF.	RFS
HEIGHT	56.3"
WIDTH	12.6"
DEPTH	6.3"
WEIGHT	56.2 LBS

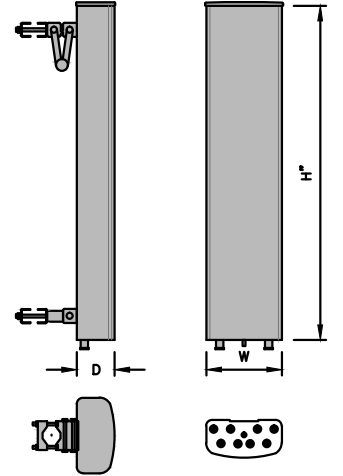


2.5MHz ANTENNA DETAIL 2
 SCALE: N.T.S. A-3

2.5MHZ RRH DIMENSIONS	
MODEL #	TD-RRH8X20-25
MANUF.	ALCATEL-LUCENT
LENGTH	25.4"
WIDTH	17.5"
DEPTH	5.7"
WEIGHT	66 LBS

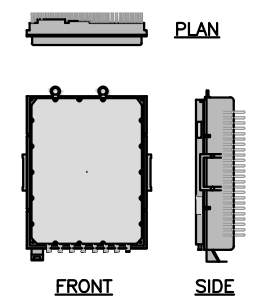


2.5MHz RRH DETAIL 3
 SCALE: N.T.S. A-3

1900MHZ RRH DIMENSIONS	
MODEL #	1900MHZ 4X45W-65MHZ
MANUF.	ALCATEL-LUCENT
LENGTH	25"
WIDTH	11.1"
DEPTH	10.7"
WEIGHT	60 LBS

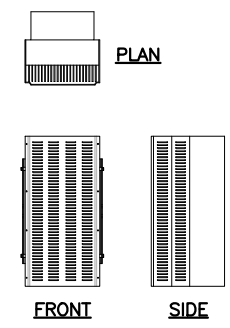


1900 MHZ RRH DETAIL 4
 SCALE: N.T.S. A-3

800MHZ RRH DIMENSIONS	
MODEL #	RRH2X50-800
MANUF.	ALCATEL-LUCENT
LENGTH	15.7"
WIDTH	13"
DEPTH	9.8"
WEIGHT	52.9 LBS

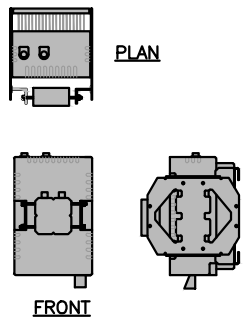


800 MHZ RRH DETAIL 5
 SCALE: N.T.S. A-3

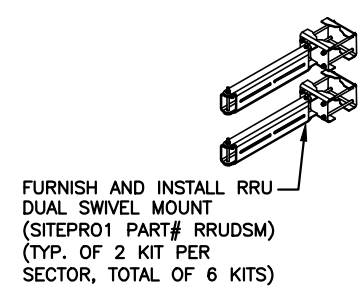


FURNISH AND INSTALL RRU DUAL SWIVEL MOUNT (SITEPRO1 PART# RRUDSM) (TYP. OF 2 KIT PER SECTOR, TOTAL OF 6 KITS)

RRU DUAL SWIVEL MOUNT DETAIL 6
 SCALE: N.T.S. A-3

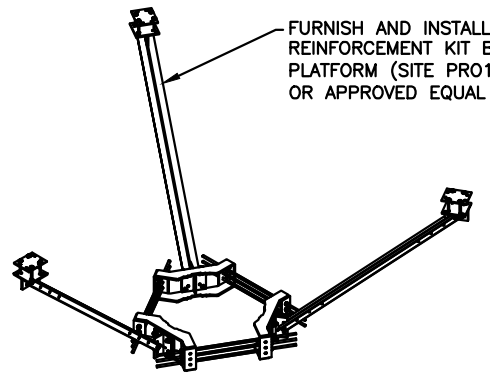

FURNISH AND INSTALL PLATFORM REINFORCEMENT KIT BELOW EXISTING PLATFORM (SITE PRO1 PART# PRK-1245 OR APPROVED EQUAL) (TOTAL OF 1)

PLATFORM REINFORCEMENT KIT DETAIL 7
 SCALE: N.T.S. A-3

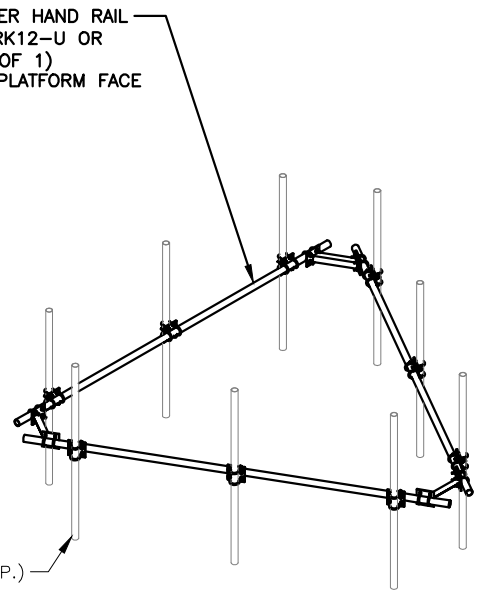

FURNISH AND INSTALL UPPER HAND RAIL KIT (SITE PRO1 PART # HRK12-U OR APPROVED EQUAL) (TOTAL OF 1) CONTRACTOR TO CONFIRM PLATFORM FACE WIDTH PRIOR TO ORDERING

EXISTING PIPE MAST (TYP.)

HANDRAIL KIT DETAIL 8
 SCALE: N.T.S. A-3

STRUCTURAL NOTE:

DESIGN LIMITATIONS AND ASSUMPTIONS:
 1. EQUIPMENT AND LOCATIONS SHOULD NOT DEVIATE FROM THE CONSTRUCTION DRAWINGS WITHOUT WRITTEN APPROVAL OF THE ENGINEER.
 2. HDG IS NOT RESPONSIBLE FOR ANY MODIFICATIONS COMPLETED PRIOR TO AND HEREAFTER WHICH HDG WAS NOT INVOLVED.
 3. ALL STRUCTURAL MEMBERS AND THEIR CONNECTIONS ARE ASSUMED TO BE IN GOOD CONDITION AND ARE FREE FROM DEFECTS WITH NO DETERIORATION TO ITS MEMBER CAPACITIES.
 CONTRACTOR IS TO PERFORM A PRE-INSPECTION TO CONFIRM.
 4. ALL ANTENNAS, COAX CABLES AND WAVEGUIDE CABLES ARE ASSUMED TO BE PROPERLY INSTALLED AND SUPPORTED AS PER THE MANUFACTURER'S REQUIREMENTS.
 5. ALL COMPONENTS SUPPORTING THE SPRINT EQUIPMENT ARE ASSUMED TO BE DESIGNED TO ALL APPLICABLE CODES AND DESIGNED FOR IDENTICAL TO OR GREATER THAN THE CURRENT LOADS.

NOTE:

REFER TO THE FINAL RF DATA SHEET FOR FINAL ANTENNA SETTINGS.

STRUCTURAL NOTE:

PRIOR TO COMMENCING CONSTRUCTION, GC SHALL REFER TO STRUCTURAL TOWER ANALYSIS PROVIDED BY CROWN CASTLE DATED JUNE 29, 2018 AND MOUNT STRUCTURAL ANALYSIS BY HUDSON DESIGN GROUP DATED JUNE 22, 2018 (REV.1) TO DETERMINE IF THERE ANY SUPPLEMENTAL OR SPECIAL INSTALLATION REQUIREMENTS, OR RELOCATION ARRANGEMENTS.

SCOPE NOTE:

PROPOSED DESIGN IS BASED OFF OF CROWN APPLICATION REV 0 DATED 05/21/18

4,6
A-3 2
A-2 EXISTING RELOCATED SPRINT 1900 RRHS (ALU 1900 MHz 4x45W-65MHz) (TYP. OF 1 PER SECTOR, TOTAL OF 3) ON NEW RRH DUAL SWIVEL MOUNT, MOUNTED TO NEW MOUNTING PIPE

5,6
A-3 2
A-2 INSTALL SPRINT 800 RRH (ALU RRH2X50-800) (TYP. OF 1 PER SECTOR, TOTAL OF 3) ON NEW RRH DUAL SWIVEL MOUNT, MOUNTED TO NEW MOUNTING PIPE

3
A-3 2
A-2 INSTALL SPRINT 2500 RRH (ALU TD-RRH8x20-25) (TYP. OF 1 PER SECTOR, TOTAL OF 3) STACK MOUNTED TO NEW MOUNTING PIPE

5
A-3 2
A-2 INSTALL SPRINT 800 RRH (ALU RRH2X50-800) (TYP. OF 1 PER SECTOR, TOTAL OF 3) STACK MOUNTED TO NEW MOUNTING PIPE

REMOVE AND REPLACE EXISTING ANTENNA: INSTALL SPRINT ANTENNA (COMMSCOPE NNW-65B-R4) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED TO NEW MOUNTING PIPE

FURNISH AND INSTALL UPPER HAND RAIL KIT (SITE PRO1 PART # HRK12-U OR APPROVED EQUAL) (TOTAL OF 1) CONTRACTOR TO CONFIRM PLATFORM FACE WIDTH PRIOR TO ORDERING

FURNISH AND INSTALL PLATFORM REINFORCEMENT KIT BELOW EXISTING PLATFORM (SITE PRO1 PART# PRK-1245 OR APPROVED EQUAL (TOTAL OF 1)

2
A-3 2
A-2 REMOVE AND REPLACE EXISTING ANTENNA: INSTALL SPRINT ANTENNA (RFS APXVTM14-ALU-I20) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED TO NEW MOUNTING PIPE

FURNISH AND INSTALL 2.5" STD (2.88" O.D.) X 72" MOUNTING PIPE (TYP. OF 3 PER SECTOR, TOTAL OF 9)

1
A-3 2
A-2 REMOVE AND REPLACE EXISTING ANTENNA: INSTALL SPRINT ANTENNA (COMMSCOPE NNW-65B-R4) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED TO NEW MOUNTING PIPE

FURNISH AND INSTALL 2.5" STD (2.88" O.D.) X 84" MOUNTING PIPE (TYP. OF 3 PER SECTOR, TOTAL OF 9)

4,6
A-3 2
A-2 EXISTING RELOCATED SPRINT 1900 RRHS (ALU 1900 MHz 4x45W-65MHz) (TYP. OF 1 PER SECTOR, TOTAL OF 3) ON NEW RRH DUAL SWIVEL MOUNT, MOUNTED TO NEW MOUNTING PIPE

ANTENNA & RRH MOUNT PHOTO DETAIL

SCALE: N.T.S.


FURNISH AND INSTALL UPPER HAND RAIL KIT (SITE PRO1 PART # HRK12-U OR APPROVED EQUAL) (TOTAL OF 1) CONTRACTOR TO CONFIRM PLATFORM FACE WIDTH PRIOR TO ORDERING

INSTALL SPRINT 2500 RRH (ALU TD-RRH8x20-25) (TYP. OF 1 PER SECTOR, TOTAL OF 3) STACK MOUNTED TO NEW MOUNTING PIPE

INSTALL SPRINT 800 RRH (ALU RRH2X50-800) (TYP. OF 1 PER SECTOR, TOTAL OF 3) ON NEW RRH DUAL SWIVEL MOUNT, MOUNTED TO NEW MOUNTING PIPE

INSTALL SPRINT 800 RRH (ALU RRH2X50-800) (TYP. OF 1 PER SECTOR, TOTAL OF 3) STACK MOUNTED TO NEW MOUNTING PIPE

FURNISH AND INSTALL PLATFORM REINFORCEMENT KIT BELOW EXISTING PLATFORM (SITE PRO1 PART# PRK-1245 OR APPROVED EQUAL (TOTAL OF 1)

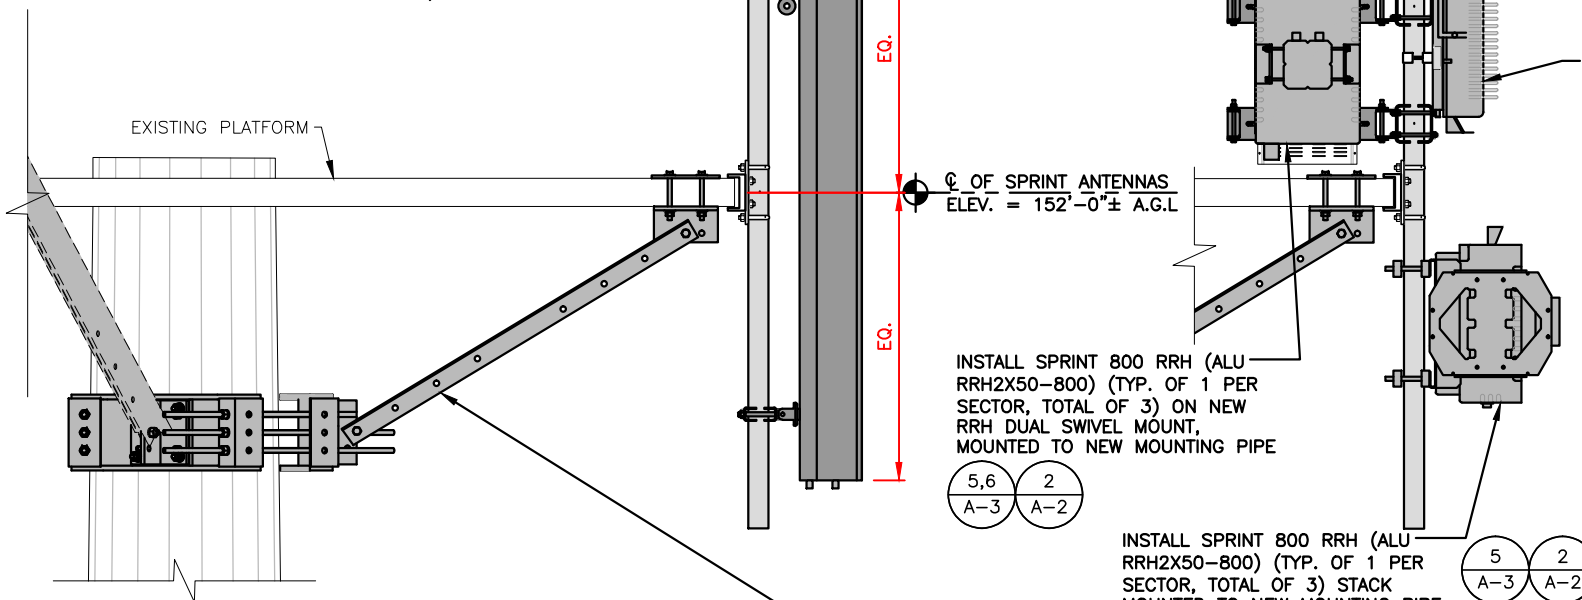

PROPOSED ANTENNA & RRH MOUNTING ELEVATION

22x34 SCALE: 1"=1'-0"
 11x17 SCALE: 1/2"=1'-0"



MAJOR RF EQUIPMENT LIST

(GC SHALL FURNISH AND INSTALL ALL OTHER MATERIALS AND EQUIPMENT NOT SUPPLIED BY SPRINT)

DESCRIPTION	QUANTITY	MAKE/MODEL/MATERIAL	PROVIDED BY
MMBTS RAN UPGRADE (VARIOUS)			
PPC DIN-RAIL CIRCUIT BREAKER			
800/1900 ANTENNA	3	COMMSCOPE NNW-65B-R4	SPRINT
2.5 ANTENNA	3	RFS APXVTM14-ALU-I20	SPRINT
RRU/GPS	6	ALCATEL-LUCENT 800MHz RRH2x50-800	SPRINT
	3	ALCATEL-LUCENT TD-RRH8x20-25	SPRINT
	3	ALCATEL-LUCENT PCS 1900MHZ 4X45W-65MHZ	EX. TO REMAIN
DIPLEXER			
HYBRID TRUNK	1	RFS HB114-13U3M12-XXXF	SPRINT
AC-POWER TRUNK	3	RFS HB114-1-0813U4-M5J	SPRINT
DC-POWER TRUNK			
F/ENET TRUNK			
AC-POWER JB			
F/ENET JB			

SPRINT-PROVIDED EQUIPMENT SCHEDULE

SCALE: N.T.S.

CHECKED BY: BB
 APPROVED BY: DJC

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
1	07/25/18	CONSTRUCTION FINAL	GA
0	01/23/18	ISSUED FOR CONSTRUCTION	AN

SITE NUMBER: CT33XC551
 SITE NAME: N. COVENTRY/
 WALLBEOFF
 CROWN BU NUMBER: 876385
 SITE ADDRESS: REILLY MTN. RD. COVENTRY, CT 06238 TOLLAND COUNTY

SHEET TITLE
MOUNTING DETAILS
 (DO MIMO REDESIGN)

SHEET NUMBER
A-4

Sprint
 1 INTERNATIONAL BLVD, SUITE 800
 MAHWAH, NJ 07495
 TEL: (800) 357-7641

CROWN CASTLE
 CROWN CASTLE
 12 GILL STREET, SUITE 5800
 WOBURN, MA 01801

HG HUDSON
Design Group LLC
 45 BEECHWOOD DRIVE TEL: (978) 557-5553
 N. ANDOVER, MA 01845 FAX: (978) 336-5586

STATE OF CONNECTICUT
 DEREK J. CREASER
 P. 2005
 LICENSED PROFESSIONAL ENGINEER
 CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN

CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
1	07/25/18	CONSTRUCTION FINAL	GA
0	01/23/18	ISSUED FOR CONSTRUCTION	AN

SITE NUMBER:
 CT33XC551
 SITE NAME:
 N. COVENTRY/
 WALLBEOFF
 CROWN BU NUMBER:
 876385
 SITE ADDRESS:
 REILLY MTN. RD.
 COVENTRY, CT 06238
 TOLLAND COUNTY

SHEET TITLE
 RF DATA SHEET
 (DO MIMO REDESIGN)

SHEET NUMBER
RF-1

NOTE:
 RFDS HAS NOT BEEN PROVIDED BY CROWN CASTLE,
 REFER TO CROWN APP REV #0 DATED 05/21/18

NOTE:
 SPRINT CM SHALL CONFIRM HYBRID CABLE LENGTH,
 COAX JUMPER LENGTH AND AISG CABLE LENGTH BEFORE
 PREPARING BOM. A&E RECOMMENDED HYBRID CABLE
 LENGTH BASED ON NV 2.5 EQUIPMENT AUDIT PLUS 20
 FEET FOR (2) 10-FOOT COILS AT EACH END OF THE
 FIBER TRUNK.

NOTE:
 GENERAL CONTRACTOR/TOWER CREW SHALL VERIFY THAT
 THE LATEST RF DATA SHEET IS USED FOR EQUIPMENT
 INSTALLATION.

SPECIAL WORK NOTE:
 JUMPERS (COAX/AISG) FROM THE 2.5 RRH TO THE 2.5
 ANTENNA CANNOT EXCEED 15'. NOTIFY SPRINT
 CONSTRUCTION MANAGER OF ANY DISCREPANCY.


RF DATA SHEET
 SCALE: N.T.S



Prepared By: Mark Elliott
 Approved By: RAN Hardware & Antenna Teams
 Revision Date: March 13, 2018
 Revision Number: R1
 Approval Date: Final-Macro Generated



ALU 211 APXVTM14-ALU-I20 & NNVV-65B-R4 wo Filters

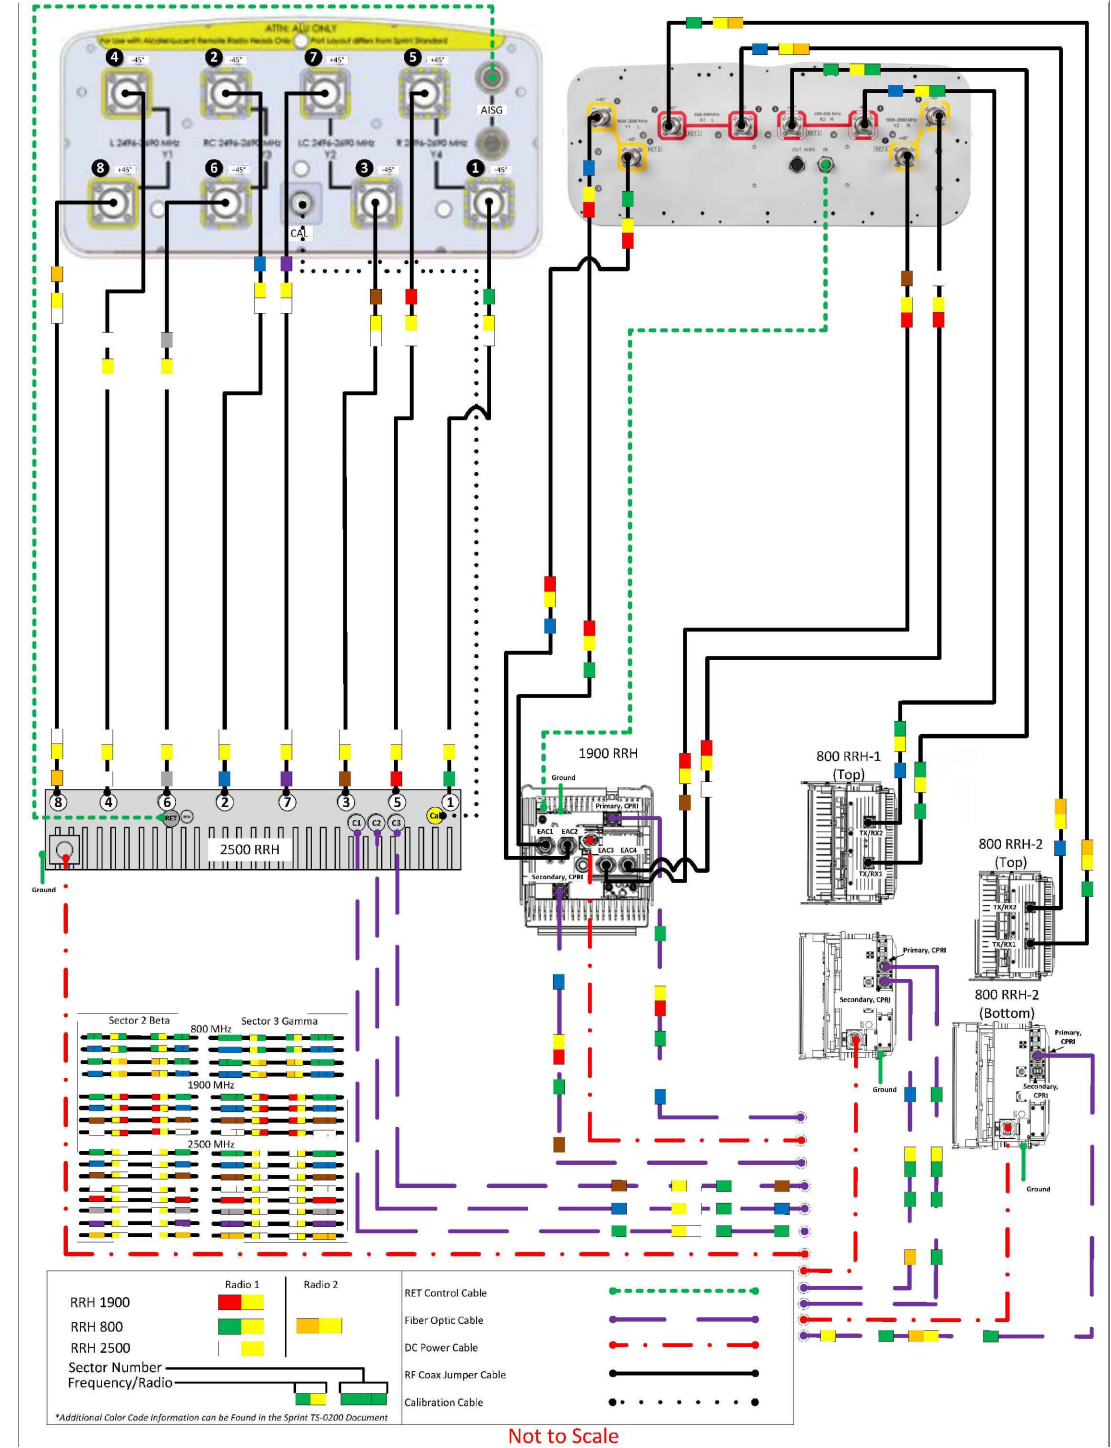

PLUMBING DIAGRAM 1 RF-2
 SCALE: N.T.S.

Sprint
 1 INTERNATIONAL BLVD, SUITE 800
 MAHWAH, NJ 07495
 TEL: (800) 357-7641

CROWN CASTLE
 CROWN CASTLE
 12 GILL STREET, SUITE 5800
 WOBURN, MA 01801

H2G HUDSON Design Group LLC
 45 BEECHWOOD DRIVE
 N. ANDOVER, MA 01851
 TEL: (978) 557-5553
 FAX: (978) 336-5586

STATE OF CONNECTICUT
 DEREK J. CREASER
 P.E. 2005
 LICENSED PROFESSIONAL ENGINEER
 CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN

CHECKED BY: BB


APPROVED BY: DJC

SUBMITTALS			
REV.	DATE	DESCRIPTION	BY
1	07/25/18	CONSTRUCTION FINAL	GA
0	01/23/18	ISSUED FOR CONSTRUCTION	AN

SITE NUMBER: CT33XC551
 SITE NAME: N. COVENTRY/
 WALLBEOFF
 CROWN BU NUMBER: 876385
 SITE ADDRESS: REILLY MTN. RD.
 COVENTRY, CT 06238
 TOLLAND COUNTY

SHEET TITLE
 WIRING DIAGRAM
 (DO MIMO REDESIGN)

SHEET NUMBER
RF-2


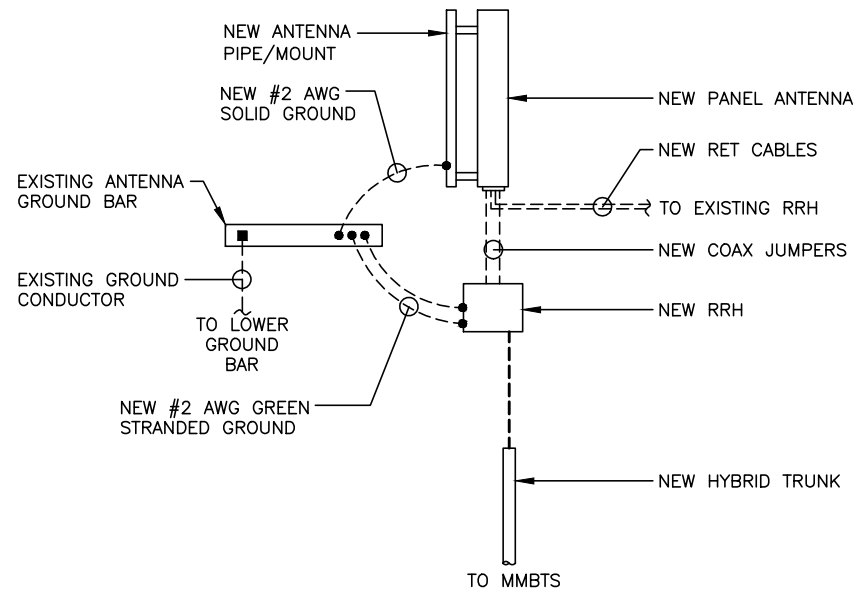


EQUIPMENT GROUNDING SCHEMATIC
SCALE: N.T.S

1
G-1

PROTECTIVE GROUNDING SYSTEMS GENERAL NOTES:

- GROUNDING SHALL BE IN ACCORDANCE WITH NEC ARTICLE 250—GROUNDING AND BONDING.
- GROUNDING SHALL BE IN ACCORDANCE WITH SPRINT SSEO DOCUMENTS 3.018.02.004 "BONDING, GROUNDING AND TRANSIENT PROTECTION FOR CELL SITES" AND 3.018.10.002 "SITE RESISTANCE TO EARTH TESTING".
- PROVIDE GROUND CONNECTIONS FOR ALL METALLIC STRUCTURES, ENCLOSURES, RACEWAYS AND OTHER CONDUCTIVE ITEMS ASSOCIATED WITH THE INSTALLATION OF CARRIER'S EQUIPMENT.
- GROUND CONNECTIONS: CLEAN SURFACES THOROUGHLY BEFORE APPLYING GROUND LUGS OR CLAMPS. IF SURFACE IS COATED, REMOVE THE COATING, APPLY A NON-CORROSIVE APPROVED COMPOUND TO CLEAN SURFACE AND INSTALL LUGS OR CLAMPS. WHERE GALVANIZING IS REMOVED FROM METAL, IT SHALL BE PAINTED OR TOUCHED UP WITH "GALVAMOX" OR EQUAL.
- ALL GROUNDING WIRES SHALL PROVIDE A STRAIGHT, DOWNWARD PATH TO GROUND WITH GRADUAL BENDS AS REQUIRED. GROUND WIRES SHALL NOT BE LOOPED OR SHARPLY BENT.
- ALL CLAMPS AND SUPPORTS USED TO SUPPORT THE GROUNDING SYSTEM CONDUCTORS AND PVC CONDUITS SHALL BE PVC TYPE (NON CONDUCTIVE). DO NOT USE METAL BRACKETS OR SUPPORTS WHICH WOULD FORM A COMPLETE RING AROUND ANY GROUNDING CONDUCTOR.
- ALL GROUND WIRES SHALL BE #2 SOLID TINNED BCW UNLESS NOTED OTHERWISE.
- PROVIDE DEDICATED #2 AWG COPPER GROUND WIRE FROM EACH ANTENNA MOUNTING PIPE TO ASSOCIATED CIGBE.
- GROUND ANTENNA BASES, FRAMES, CABLE RACKS, AND OTHER METALLIC COMPONENTS WITH #2 INSULATED TINNED STRANDED COPPER GROUNDING CONDUCTORS AND CONNECT TO INSULATED SURFACE MOUNTED GROUND BARS. CONNECTION DETAILS SHALL FOLLOW MANUFACTURER'S SPECIFICATIONS FOR GROUNDING.
- EACH EQUIPMENT CABINET SHALL BE CONNECTED TO THE MASTER ISOLATION GROUND BAR (MGB) WITH #2 SOLID TINNED BCW EQUIPMENT CABINETS WALL HAVE (2) CONNECTIONS.
- GROUND HYBRIFLEX SHIELD AT TOP, BOTTOM AND AT TRANSITION TO HYBRIFLEX JUMPER CABLES AT EQUIPMENT CABINET ENTRANCE USING MANUFACTURER'S GUIDELINES. WHEN HYBRIFLEX CABLE EXCEEDS 200', GROUND AT INTERVALS NOT EXCEEDING 100'.
- THE CONTRACTOR SHALL VERIFY THAT THE EXISTING GROUND BARS HAVE ENOUGH SPACE/HOLES FOR ADDITIONAL TWO HOLE LUGS.
- EXOTHERMIC WELDING IS RECOMMENDED FOR GROUNDING CONNECTION WHERE PRACTICAL OTHERWISE. THE CONNECTION SHALL BE MADE USING COMPRESSION TYPE-2 HOLES, LONG BARREL LUGS OR DOUBLE CRIMP "C" CLAMP. THE COPPER CABLES SHALL BE COATED WITH AN ANTI-OXIDANT (THOMAS BETTS KOPR-SHIELD) BEFORE MAKING THE CRIMP CONNECTIONS THE CONTRACTOR SHALL FOLLOW MANUFACTURER'S RECOMMENDED TORQUES ON THE BOLT ASSEMBLY TO SECURE CONNECTIONS.
- AT ALL TERMINATIONS AT EQUIPMENT ENCLOSURES, PANEL, AND FRAMES OF EQUIPMENT AND WHERE EXPOSED FOR GROUNDING. CONDUCTOR TERMINATION SHALL BE PERFORMED UTILIZING TWO HOLE BOLTED TONGUE COMPRESSION TYPE LUGS WITH STAINLESS STEEL SELF-TAPPING SCREWS.
- THE MASTER GROUND BAR (MGB) SHALL BE MADE OF BARE 1/4"x2" COPPER (FOR OUTDOOR APPLICATIONS IT SHALL BE TINNED COPPER) AND LARGE ENOUGH TO ACCOMMODATE THE REQUIRED NUMBER OF GROUND CONNECTIONS. THE HARDWARE SECURING THE MGB SHALL ELECTRICAL INSULATE THE MGB FROM ANY STRUCTURE TO WHICH IT IS FASTENED.
- ALL BOLTS, WASHERS, AND NUTS USED ON GROUNDING CONNECTIONS SHALL BE STAINLESS STEEL.
- ALL GROUNDING CONNECTIONS SHALL BE COATED WITH A COPPER SHIELD ANTI-CORROSIVE AGENT SUCH AS T&B KOPR SHIELD. VERIFY PRODUCT WITH SPRINT CONSTRUCTION MANAGER.
- FOR NEW OR REPAIRED GROUNDING EQUIPMENT. REFER TO SPRINT GROUNDING STANDARDS AND FOLLOWING (SUPPLEMENTS):
-ANTI-THEFT UPDATE TO SPRINT GROUNDING DATED: 08-24-12 (OR CURRENT VERSION)
-SPRINT ENGINEERING LETTER EL-0504 DATED: 04-20-12 (OR CURRENT VERSION)

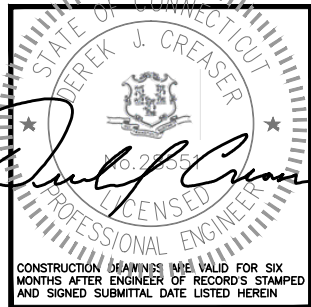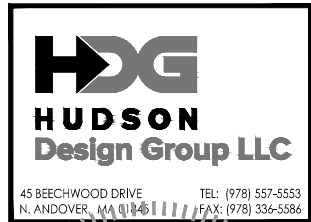


CHECKED BY: BB
APPROVED BY: DJC

SUBMITTALS			
REV.	DATE	DESCRIPTION	BY
1	07/25/18	CONSTRUCTION FINAL	GA
0	01/23/18	ISSUED FOR CONSTRUCTION	AN

SITE NUMBER:
CT33XC551
SITE NAME:
N. COVENTRY/
WALLBEOFF
CROWN BU NUMBER:
876385
SITE ADDRESS:
REILLY MTN. RD.
COVENTRY, CT 06238
TOLLAND COUNTY

SHEET TITLE
ONE LINE DIAGRAM,
GROUNDING DETAILS
& NOTES
(DO MIMO REDESIGN)

SHEET NUMBER
G-1

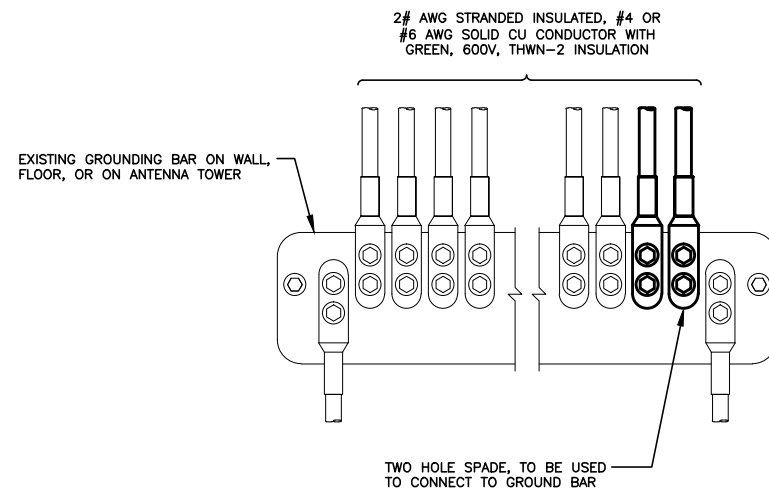


NOTES

- APPLY NO-OX TO LUG AND BAR CONTACT SURFACE. DO NOT COAT INLINE LUG.
- IF STOLEN GROUND BARS ARE ENCOUNTERED, CONTACT SPRINT CM FOR REPLACEMENT THREADED ROD KIT.

INSTALLATION OF GROUNDING CONDUCTOR TO GROUNDING BAR
SCALE: N.T.S

2
G-1

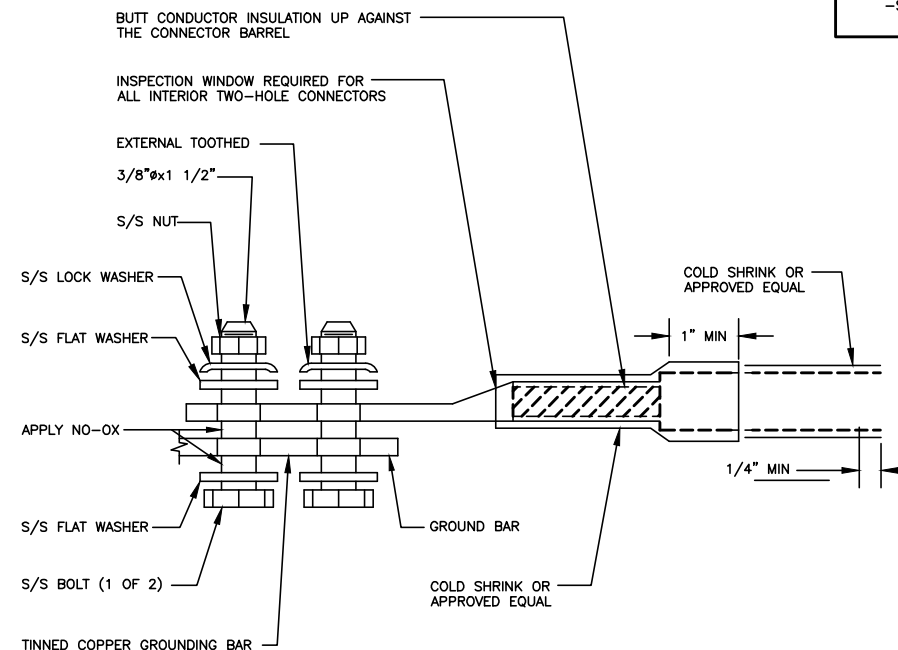

TWO HOLE LUG
SCALE: N.T.S

3
G-1

By: Pollansky
Motion carried with the following vote:
For: Unanimous

Seconded: Terry
Against: None

Abstain: None

- 3. Town of Andover - P&Z referral re: Planned residential development for older persons - Bear Swamp Road.

Trott briefly reviewed this project for 9 buildings (31 total units) of elderly housing on 18.2 acres off of Bear Swamp Road in Andover. This proposed project has no significant impact to the Town of Coventry.

NEW BUSINESS -

None.

DECISIONS -

- 1. 00-18S - Special permit application of Sprint Spectrum, LP (DBA Sprint PCS); to establish a telecommunications facility, 150' monopole, and associated ground equipment; property located on Riley Mountain Road (Assessor's Map 11, Block 29-A, Lots 2,3); RU-40 Zone.

MOTION: The Planning and Zoning Commission here by approves 00-18S - Special permit application of Sprint Spectrum, LP (DBA Sprint PCS); to establish a telecommunications facility, 150' monopole, and associated ground equipment; property located on Riley Mountain Road (Assessor's Map 11, Block 29-A, Lots 2,3); RU-40 Zone, with the following conditions:

- 1. The pole is to be expandable for possible future use.
- 2. The amount of carriers on the 150' pole is to be 6 rather than 3.
- 3. The Town of Coventry has access to public safety communication.

By: Pollansky
Motion carried with the following vote:
For: Unanimous

Seconded: Terry
Against: None

Abstain: None

- 4. 00-19ZR - Zoning amendment application of William and Karen Mudano to revise Sections 2.6.1.a, 2.6.2.a, 3.4.1, and 16 (River Aquifer Zone) of the zoning regulations.

There was further discussion of Merisotis' concerns that the proposed amendments may be contrary to the goals for the RA Zone. It was his opinion that these proposals would not add to the protection of the zone, but would increase the property value and facilitate the potential of subdivision. Pollansky felt that the RA Zone is sufficiently protected within the regulations, allowing for a large house would not reduce this protection. Pollansky felt it was unlikely that the proposed changes would significantly change the value of property in the zone.



Town of Coventry

1712 Main Street • Coventry, CT 06238 • Fax (860) 742-8911

CT 33XC55
JW

CERTIFIED MAIL # 7099 3400 0007 2017 0083
September 6, 2000

Attorney Thomas J. Regan, Esq.
Brown, Rudnik, Freed, and Gesmer
185 Asylum Street
Hartford CT 06107

Dear Attorney Regan:

At its regular meeting on August 28, 2000, the Coventry Planning and Zoning Commission made the following decision:

To approve application 00-18S of Sprint Spectrum, LP (DBA sprint PCS), to establish a telecommunications facility, 150' monopole, and associated ground equipment; property located on Riley Mountain Road (Assessor's Map 11, Block 29-A, Lots 2,3); RU-40 Zone.

The following conditions apply:

1. The pole is to be expandable for possible future use.
2. The amount of carriers on the 150' pole is to be six rather than three.
3. The town of Coventry has access to public safety communication.

I wish to remind you that you must file an 8-3d form with the Town Clerk's office in addition to final mylar(s) of the approved plan. Please see the attached information for further instruction. Also, it is requested that you place this approval letter on the final plans.

Sincerely,

Eric M. Trott
Director of Planning and Development

EMT/lpe

/enclosure

cc: Sprint Spectrum, L.P.
Goodkind & O'Dea, Inc.
James Wallbeoff, Jr.

If you have received approval from the Coventry Zoning Board of Appeals or the Planning and Zoning Commission for a special permit/exception or variance, the following requirements must be completed before the issuance of a zoning permit:

FOR SPECIAL EXCEPTION, PERMIT, OR *VARIANCE:

1. An 8-3d form of approval must be filed with the Town Clerk's office. The form cannot be filed until the fifteen day appeal period has ended (15 days from the date of legal notice publication; not date of Commission/Board approval). The form will be prepared at the Planning office and available for filing after *September 16, 2000* (There is a filing fee which you pay at the Clerk's office at the time you file the 8-3d form).

FOR SPECIAL EXCEPTION/PERMIT:

1. You must file a Mylar of final plans with the Town Clerk's office within 90 days of approval date. However, the Mylar cannot be filed until after the fifteen day appeal period has ended, which will be after *September 16, 2000* (There is a filing fee which you pay at the Clerk's office at the time you file the Mylar.)

Section 4.3.c.5 of the zoning regulations states:

Endorsement and Filing. Within sixty-five days of the Commission/Board approval, the applicant shall submit one (1) set of final plans on Mylar and six (6) sets on paper (please note: in some cases we may accept three (3) copies for special exceptions), reflecting all conditions or modifications required by the Commission/Board, and accompanied by signed, sworn statements of the applicant's land surveyor, engineer, architect, and any other professional who has participated in the preparation of the application materials, to the effect that the plans submitted are the same as those approved by the Commission/Board except for the depiction of modifications and conditions required by the Commission/Board in its approval vote. If, upon considering the statements and reviewing the plans submitted, the Commission/Board shall find them to be in accordance with the final approval, they shall be endorsed by the signature of the Chairman, Vice-Chairman, or Secretary of the Commission/Board, as the case may be. Thereafter, it shall be the responsibility of the applicant to file one (1) set of endorsed Mylar plans in the office of the Town Clerk. In accordance with Section 8-3d of the Connecticut General Statutes, no Special Permit/Exception shall be effective until the final, endorsed plans are filed with the Town Clerk, and **any plans not so filed within ninety (90) days following the Commission's/Board's vote of approval shall become null and void.** Any Special Permit/Exception site plan filed in the Town Clerk's office without the endorsement of the Commission's/Board's Chairman, Vice-Chairman, or Secretary shall likewise be void.

*In the case where a variance has been granted, it is recommended that if you have not already done so, you may want to submit your application for building permit and zoning permit to the Building office prior to the appeal period ending. This may possibly help to speed up your application process/review and avoid a delay in obtaining your permits.

Revised 03/10/98



Date: **June 29, 2018**

Denice Nicholson
Crown Castle
3 Corporate Park Drive Suite 101
Clifton Park, NY 12065

Crown Castle
2000 Corporate Drive
Canonsburg, PA 15317
(724) 416-2000

Subject: Structural Analysis Report

Carrier Designation:	Sprint PCS Co-Locate	
	Carrier Site Number:	CT33XC551
	Carrier Site Name:	CT33XC551
Crown Castle Designation:	Crown Castle BU Number:	876385
	Crown Castle Site Name:	N. COVENTRY / WALLBEOFF
	Crown Castle JDE Job Number:	505985
	Crown Castle Work Order Number:	1595255
	Crown Castle Order Number:	441491 Rev. 0
Engineering Firm Designation:	Crown Castle Project Number:	1595255
Site Data:	Reilly Mtn. Rd., COVENTRY, Tolland County, CT	
	Latitude 41° 47' 56.21", Longitude -72° 19' 55.88"	
	152 Foot - Monopole Tower	

Dear Denice Nicholson,

Crown Castle is pleased to submit this “**Structural Analysis Report**” to determine the structural integrity of the above mentioned tower. This analysis has been performed in accordance with the Crown Castle Structural ‘Statement of Work’ and the terms of Crown Castle Purchase Order Number 1595255, in accordance with order 441491, revision 0.

The purpose of the analysis is to determine acceptability of the tower stress level. Based on our analysis we have determined the tower stress level for the structure and foundation, under the following load case, to be:

LC7: Existing + Reserved + Proposed Equipment	Sufficient Capacity
Note: See Table I and Table II for the proposed and existing/reserved loading, respectively.	

This analysis has been performed in accordance with the 2016 Connecticut State Building Code based upon an ultimate 3-second gust wind speed of 130 mph converted to a nominal 3-second gust wind speed of 101 mph per Section 1609.3 and Appendix N as required for use in the TIA-222-G Standard per Exception #5 of Section 1609.1.1. Exposure Category B and Risk Category II were used in this analysis.

All modifications and equipment proposed in this report shall be installed in accordance with the attached drawings for the determined available structural capacity to be effective.

We at *Crown Castle* appreciate the opportunity of providing our continuing professional services to you and Crown Castle. If you have any questions or need further assistance on this or any other projects, please give us a call.

Structural analysis prepared by: Cindy Dostatni / M.B

Respectfully submitted by:

Bradley E. Byrom, P.E., S.E.
Senior Project Engineer



7/1/2018

TABLE OF CONTENTS

1) INTRODUCTION

2) ANALYSIS CRITERIA

Table 1 - Proposed Antenna and Cable Information

Table 2 - Existing and Reserved Antenna and Cable Information

Table 3 - Design Antenna and Cable Information

3) ANALYSIS PROCEDURE

Table 4 - Documents Provided

3.1) Analysis Method

3.2) Assumptions

4) ANALYSIS RESULTS

Table 5 - Section Capacity (Summary)

Table 6 - Tower Component Stresses vs. Capacity - LC7

4.1) Recommendations

5) APPENDIX A

tnxTower Output

6) APPENDIX B

Base Level Drawing

7) APPENDIX C

Additional Calculations

1) INTRODUCTION

This tower is a 152 ft monopole tower designed by Engineered Endeavors in September of 2000. The tower was originally designed as 194 ft monopole and for a wind speed of 90 mph per TIA/EIA-222-F.

2) ANALYSIS CRITERIA

The structural analysis was performed for this tower in accordance with the requirements of TIA-222-G Structural Standards for Steel Antenna Towers and Antenna Supporting Structures using a 3-second gust wind speed of 101 mph with no ice, 50 mph with 1 inch ice thickness and 60 mph under service loads, exposure category B.

Table 1 - Proposed Antenna and Cable Information

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note
150.0	152.0	3	alcatel lucent	PCS 1900MHZ 4X45W-65MHZ	4	1-1/4	-
		6	alcatel lucent	RRH2X50-800			
		3	alcatel lucent	TD-RRH8X20-25			
		3	commscope	NNVV-65B-R4 w/ Mount Pipe			
	3	rfs celwave	APXVTM14-ALU-I20 w/ Mount Pipe				
	150.0	1	site pro 1	PRK-1245			

Table 2 - Existing and Reserved Antenna and Cable Information

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note
152.0	162.0	1	dbspectra	DS9A09F36D-N	1 2	1/2 1-5/8	2
	152.0	1	bird technologies group	430-94C-09168-M-110/48			
		1	tower mounts	Pipe Mount [PM 601-1]			
150.0	152.0	6	decibel	DB980F90T2E-M w/ Mount Pipe	6	1-5/8	3
	150.0	1	tower mounts	Platform Mount [LP 601-1]	-	-	1
133.0	136.0	3	commscope	ATBT-BOTTOM-24V	12	1-5/8	1
		3	commscope	LNX-6515DS-VTM w/ Mount Pipe			
		3	ems wireless	RR90-17-02DP w/ Mount Pipe			
		3	ericsson	KRY 112 71/2			
	133.0	3	ericsson	KRY 112 71/2			
		1	tower mounts	Platform Mount [LP 304-1]			
124.0	126.0	3	alcatel lucent	RRH2X60-PCS	2	1-5/8	2
		3	alcatel lucent	RRH2x60-700			
		3	alcatel lucent	RRH4X45-AWS4 B66			
		2	rfs celwave	DB-T1-6Z-8AB-0Z			

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note
		6	andrew	SBNHH-1D65B w/ Mount Pipe	18	1-5/8	1
		3	antel	LPA-171080-12CF-EDIN-2 w/ Mount Pipe			
		6	antel	LPA-80080/6CF w/ Mount Pipe			
	124.0	1	tower mounts	Platform Mount [LP 304-1]			
116.0	120.0	2	cci antennas	HPA-65R-BUU-H6 w/ Mount Pipe	1 2 1	3/8 3/4 conduit	2
		1	cci antennas	HPA-65R-BUU-H8 w/ Mount Pipe			
		2	kathrein	80010965 w/ Mount Pipe			
		1	kathrein	80010966 w/ Mount Pipe			
		3	ericsson	RRUS 32			
		3	ericsson	RRUS 32 B2			
		1	raycap	DC6-48-60-18-8F			
		6	powerwave technologies	7020.00			
		3	ericsson	RRUS 4478 B14			
		3	ericsson	RRUS-11			
	3	powerwave technologies	7770.00 w/ Mount Pipe	1 2 12 1	3/8 3/4 7/8 conduit	1	
	1	raycap	DC6-48-60-18-8F				
	6	powerwave technologies	LGP21401				
	116.0	1	tower mounts	Platform Mount [LP 1201-1]			
107.0	107.0	3	kathrein	742 213	6	1-5/8	1
		1	tower mounts	Pipe Mount [PM 601-3]			
74.0	75.0	1	lucent	KS24019-L112A	1	1/2	1
	74.0	1	tower mounts	Side Arm Mount [SO 701-1]			

- Notes:
 1) Existing Equipment
 2) Reserved Equipment
 3) Equipment To Be Removed; Not Considered in this Analysis

Table 3 - Design Antenna and Cable Information

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
191.5	191.5	12	dapa	48000	-	-
181.5	181.5	12	dapa	48000	-	-
171.5	171.5	12	dapa	48000	-	-
161.5	161.5	12	dapa	48000	-	-
150.0	150.0	12	dapa	48000	-	-
140.0	140.0	12	dapa	48000	-	-

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
130.0	130.0	12	dapa	48000	-	-
120.0	120.0	12	dapa	48000	-	-
110.0	110.0	12	dapa	48000	-	-
100.0	100.0	12	dapa	48000	-	-

3) ANALYSIS PROCEDURE

Table 4 - Documents Provided

Document	Remarks	Reference	Source
4-GEOTECHNICAL REPORTS	Goodkind & O'Dea	1531969	CCISITES
4-TOWER FOUNDATION DRAWINGS/DESIGN/SPECS	Engineered Endeavors	1441268	CCISITES
4-TOWER MANUFACTURER DRAWINGS	Engineered Endeavors	1614566	CCISITES

3.1) Analysis Method

tnxTower (version 7.0.5.1), a commercially available analysis software package, was used to create a three-dimensional model of the tower and calculate member stresses for various loading cases. Selected output from the analysis is included in Appendix A.

3.2) Assumptions

- 1) Tower and structures were built in accordance with the manufacturer's specifications.
- 2) The tower and structures have been maintained in accordance with the manufacturer's specification.
- 3) The configuration of antennas, transmission cables, mounts and other appurtenances are as specified in Tables 1 and 2 and the referenced drawings.

This analysis may be affected if any assumptions are not valid or have been made in error. Crown Castle should be notified to determine the effect on the structural integrity of the tower.

4) ANALYSIS RESULTS

Table 5 - Section Capacity (Summary)

Section No.	Elevation (ft)	Component Type	Size	Critical Element	P (K)	SF*P_allow (K)	% Capacity	Pass / Fail
L1	152 - 137.42	Pole	TP37.31x33.03x0.313	1	-4.783	2526.220	3.4	Pass
L2	137.42 - 91.09	Pole	TP50.15x35.167x0.375	2	-26.567	3935.810	23.2	Pass
L3	91.09 - 44.79	Pole	TP62.86x47.413x0.438	3	-44.813	5613.010	32.3	Pass
L4	44.79 - 0	Pole	TP75x59.537x0.5	4	-74.590	7706.060	35.1	Pass
							Summary	
						Pole (L4)	35.1	Pass
						Rating =	35.1	Pass

Table 6 - Tower Component Stresses vs. Capacity - LC7

Notes	Component	Elevation (ft)	% Capacity	Pass / Fail
1	Anchor Rods	0	33.3	Pass
1	Base Plate	0	44.1	Pass
1	Base Foundation Structure	0	40.5	Pass
1	Base Foundation Soil Interaction	0	31.2	Pass
Structure Rating (max from all components) =				44.1%

Notes:

- 1) See additional documentation in "Appendix C – Additional Calculations" for calculations supporting the % capacity consumed.

4.1) Recommendations

The tower and its foundation have sufficient capacity to carry the proposed load configuration. No modifications are required at this time.



RADIO FREQUENCY EMISSIONS ANALYSIS REPORT EVALUATION OF HUMAN EXPOSURE POTENTIAL TO NON-IONIZING EMISSIONS

SPRINT Existing Facility

Site ID: CT33XC551

N. Coventry/ Wallbeoff
Reilly Mtn. Rd.
Coventry, CT 06238

September 18, 2018

EBI Project Number: 6218006114

Site Compliance Summary	
Compliance Status:	COMPLIANT
Site total MPE% of FCC general population allowable limit:	14.02 %



September 18, 2018

SPRINT

Attn: RF Engineering Manager
1 International Boulevard, Suite 800
Mahwah, NJ 07495

Emissions Analysis for Site: **CT33XC551 – N. Coventry/ Wallbeoff**

EBI Consulting was directed to analyze the proposed SPRINT facility located at **Reilly Mtn. Rd., Coventry, CT**, for the purpose of determining whether the emissions from the Proposed SPRINT Antenna Installation located on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01 and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The number of $\mu\text{W}/\text{cm}^2$ calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits, therefore it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) – (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

General population/uncontrolled exposure limits apply to situations in which the general population may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general population would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

General population exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The general population exposure limits for the 850 MHz Band is approximately $567 \mu\text{W}/\text{cm}^2$. The general population exposure limit for the 1900 MHz (PCS) and 2500 MHz (BRS) bands is $1000 \mu\text{W}/\text{cm}^2$. Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.



Occupational/controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

CALCULATIONS

Calculations were done for the proposed SPRINT Wireless antenna facility located at **Reilly Mtn. Rd., Coventry, CT**, using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. Since SPRINT is proposing highly focused directional panel antennas, which project most of the emitted energy out toward the horizon, all calculations were performed assuming a lobe representing the maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB for directional panel antennas, was focused at the base of the tower. For this report the sample point is the top of a 6-foot person standing at the base of the tower.

For all calculations, all equipment was calculated using the following assumptions:

- 1) 1 CDMA channels (850 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 20 Watts per Channel.
- 2) 2 LTE channels (850 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 50 Watts per Channel.
- 3) 5 CDMA channels (1900 MHz (PCS)) were considered for each sector of the proposed installation. These Channels have a transmit power of 16 Watts per Channel.
- 4) 2 LTE channels (1900 MHz (PCS)) were considered for each sector of the proposed installation. These Channels have a transmit power of 40 Watts per Channel.
- 5) 8 LTE channels (2500 MHz (BRS)) were considered for each sector of the proposed installation. These Channels have a transmit power of 20 Watts per Channel.



- 6) All radios at the proposed installation were considered to be running at full power and were uncombined in their RF transmissions paths per carrier prescribed configuration. Per FCC OET Bulletin No. 65 - Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. This is rarely the case, and if so, is never continuous.
- 7) For the following calculations, the sample point was the top of a 6-foot person standing at the base of the tower. The maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB for directional panel antennas, was used in this direction. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 8) The antennas used in this modeling are the **Commscope NNVV-65B-R4 and the RFS APXVTM14-ALU-I20** for transmission in the 850 MHz, 1900 MHz (PCS) and 2500 MHz (BRS) frequency bands. This is based on feedback from the carrier with regards to anticipated antenna selection. Maximum gain values for all antennas are listed in the Inventory and Power Data table below. The maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB for directional panel antennas, was used for all calculations. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 9) The antenna mounting height centerlines of the proposed panel antennas are **152 feet** above ground level (AGL) for **Sector A**, **152 feet** above ground level (AGL) for **Sector B** and **152 feet** above ground level (AGL) for Sector C.
- 10) Emissions values for additional carriers were taken from the Connecticut Siting Council active database. Values in this database are provided by the individual carriers themselves.

All calculations were done with respect to uncontrolled / general population threshold limits.



SPRINT Site Inventory and Power Data by Antenna

Sector:	A	Sector:	B	Sector:	C
Antenna #:	1	Antenna #:	1	Antenna #:	1
Make / Model:	Commscope NNVV-65B-R4	Make / Model:	Commscope NNVV-65B-R4	Make / Model:	Commscope NNVV-65B-R4
Gain:	12.75 / 15.05 dBd	Gain:	12.75 / 15.05 dBd	Gain:	12.75 / 15.05 dBd
Height (AGL):	152 feet	Height (AGL):	152 feet	Height (AGL):	152 feet
Frequency Bands	850 MHz / 1900 MHz (PCS)	Frequency Bands	850 MHz / 1900 MHz (PCS)	Frequency Bands	850 MHz / 1900 MHz (PCS)
Channel Count	10	Channel Count	10	Channel Count	10
Total TX Power(W):	280 Watts	Total TX Power(W):	280 Watts	Total TX Power(W):	280 Watts
ERP (W):	7,378.61	ERP (W):	7,378.61	ERP (W):	7,378.61
Antenna A1 MPE%	1.54 %	Antenna B1 MPE%	1.54 %	Antenna C1 MPE%	1.54 %
Antenna #:	2	Antenna #:	2	Antenna #:	2
Make / Model:	RFS APXVTM14- ALU-I20	Make / Model:	RFS APXVTM14- ALU-I20	Make / Model:	RFS APXVTM14- ALU-I20
Gain:	15.9 dBd	Gain:	15.9 dBd	Gain:	15.9 dBd
Height (AGL):	152 feet	Height (AGL):	152 feet	Height (AGL):	152 feet
Frequency Bands	2500 MHz (BRS)	Frequency Bands	2500 MHz (BRS)	Frequency Bands	2500 MHz (BRS)
Channel Count	8	Channel Count	8	Channel Count	8
Total TX Power(W):	160 Watts	Total TX Power(W):	160 Watts	Total TX Power(W):	160 Watts
ERP (W):	6,224.72	ERP (W):	6,224.72	ERP (W):	6,224.72
Antenna A2 MPE%	1.05 %	Antenna B2 MPE%	1.05 %	Antenna C2 MPE%	1.05 %

Site Composite MPE%	
Carrier	MPE%
SPRINT – Max per sector	2.59 %
AT&T	5.90 %
MetroPCS	0.67 %
Eversource	0.06 %
T-Mobile	1.80 %
Verizon Wireless	3.00 %
Site Total MPE %:	14.02 %

SPRINT Sector A Total:	2.59 %
SPRINT Sector B Total:	2.59 %
SPRINT Sector C Total:	2.59 %
Site Total:	14.02 %

SPRINT _ Frequency Band / Technology (All Sectors)	# Channels	Watts ERP (Per Channel)	Height (feet)	Total Power Density ($\mu\text{W}/\text{cm}^2$)	Frequency (MHz)	Allowable MPE ($\mu\text{W}/\text{cm}^2$)	Calculated % MPE
Sprint 850 MHz CDMA	1	376.73	152	0.64	850 MHz	567	0.12%
Sprint 850 MHz LTE	2	941.82	152	3.18	850 MHz	567	0.56%
Sprint 1900 MHz (PCS) CDMA	5	511.82	152	4.32	1900 MHz (PCS)	1000	0.43%
Sprint 1900 MHz (PCS) LTE	2	1,279.56	152	4.32	1900 MHz (PCS)	1000	0.43%
Sprint 2500 MHz (BRS) LTE	8	778.09	152	10.50	2500 MHz (BRS)	1000	1.05%
						Total:	2.59%



Summary

All calculations performed for this analysis yielded results that were **within** the allowable limits for general population exposure to RF Emissions.

The anticipated maximum composite contributions from the SPRINT facility as well as the site composite emissions value with regards to compliance with FCC's allowable limits for general population exposure to RF Emissions are shown here:

SPRINT Sector	Power Density Value (%)
Sector A:	2.59 %
Sector B:	2.59 %
Sector C:	2.59 %
SPRINT Maximum MPE % (per sector):	2.59 %
Site Total:	14.02 %
Site Compliance Status:	COMPLIANT

The anticipated composite MPE value for this site assuming all carriers present is **14.02 %** of the allowable FCC established general population limit sampled at the ground level. This is based upon values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.


773320678443



Delivered
Wednesday 9/26/2018 at 10:05 am

**DELIVERED**

Signed for by: L.STONE

[GET STATUS UPDATES](#)[OBTAIN PROOF OF DELIVERY](#)**FROM**

Kristian McKay
STE 300
3530 Toringdon Way
CHARLOTTE, NC US 28277
704 405-6612

TO

Town Hall
Town Manager: John Elsesser
1712 Main St.
COVENTRY, CT US 06238
704 405-6612


773320700909



Delivered
Wednesday 9/26/2018 at 10:06 am

**DELIVERED**

Signed for by: B.TANDEY

[GET STATUS UPDATES](#)[OBTAIN PROOF OF DELIVERY](#)**FROM**

Kristian McKay
STE 300
3530 Toringdon Way
CHARLOTTE, NC US 28277
704 405-6612

TO

Town Hall
Building Official: Bob Roraback
1712 Main St.
CONVENTRY, CT US 06238
704 405-6612

773320731286 

Delivered
Wednesday 9/26/2018 at 2:54 pm

**DELIVERED**

Signature not required

[GET STATUS UPDATES](#)[OBTAIN PROOF OF DELIVERY](#)**FROM**

Kristian McKay
STE 300
3530 Toringdon Way
CHARLOTTE, NC US 28277
704 405-6612

TO

James Concetta Wallbeoff Trust
4 Knotty Pine Lane
DEERFIELD, VA US 24432
704 405-6612

[Travel History](#)[Shipment Facts](#)