



STATE OF CONNECTICUT

CONNECTICUT SITING COUNCIL

Ten Franklin Square, New Britain, CT 06051

Phone: (860) 827-2935 Fax: (860) 827-2950

E-Mail: siting.council@ct.gov

www.ct.gov/csc

VIA ELECTRONIC MAIL

May 16, 2019

Jeffrey Barbadora
Real Estate Specialist
Crown Castle
12 Gill Street, Suite 5800
Woburn, MA 01801

RE: **EM-SPRINT-118-190502** – Sprint notice of intent to modify an existing telecommunications facility located at 845 Ethan Allen Highway, Ridgefield, Connecticut.

Dear Mr. Barbadora:

The Connecticut Siting Council (Council) is in receipt of your correspondence of May 14, 2019 and May 15, 2019 submitted in response to the Council's May 3, 2019 notification of an incomplete request for exempt modification with regard to the above-referenced matter.

The submission renders the request for exempt modification complete and the Council will process the request in accordance with the Federal Communications Commission 60-day timeframe.

Thank you for your attention and cooperation.

Sincerely,

Melanie A. Bachman
Executive Director

MAB/IN/emr



From: Barbadora, Jeff [mailto:Jeff.Barbadora@crowncastle.com]
Sent: Tuesday, May 14, 2019 9:42 AM
To: Robidoux, Evan
Cc: CSC-DL Siting Council
Subject: RE: Council Incomplete Letter for EM-SPRINT-118-190502-EthanAllenHwy-Ridgefield

Please find corrected CD's and notice sent via FedEx receipt to First Selectman of Ridgefield.

Hard copies to be delivered at your office tomorrow.

Thanks,

Jeffrey Barbadora
781-970-0053
12 Gill Street, Suite 5800, Woburn, MA 01801
CrownCastle.com

From: Robidoux, Evan <Evan.Robidoux@ct.gov>
Sent: Wednesday, May 8, 2019 9:41 AM
To: Barbadora, Jeff <Jeff.Barbadora@crowncastle.com>
Cc: CSC-DL Siting Council <Siting.Council@ct.gov>
Subject: Council Incomplete Letter for EM-SPRINT-118-190502-EthanAllenHwy-Ridgefield

CAUTION: This email originated from outside of the organization. Do not click links or open attachments unless you recognize the sender and know the content is safe.

Please see the attached correspondence.

Evan Robidoux
Clerk Typist
Connecticut Siting Council
10 Franklin Square
New Britain, CT 06051

This email may contain confidential or privileged material. Use or disclosure of it by anyone other than the recipient is unauthorized. If you are not an intended recipient, please delete this email.

Robidoux, Evan

From: Barbadora, Jeff <Jeff.Barbadora@crowncastle.com>
Sent: Wednesday, May 15, 2019 10:20 AM
To: Robidoux, Evan
Cc: CSC-DL Siting Council
Subject: RE: Council Incomplete Letter for EM-SPRINT-118-190502-EthanAllenHwy-Ridgefield
Attachments: FedEx Shipment 775210181445 Delivered

Delivery confirmation attached.

Thanks,

Jeffrey Barbadora
781-970-0053
12 Gill Street, Suite 5800 Woburn, MA 01801
CrownCastle.com

From: Barbadora, Jeff
Sent: Tuesday, May 14, 2019 9:42 AM
To: Robidoux, Evan <Evan.Robidoux@ct.gov>
Cc: CSC-DL Siting Council <Siting.Council@ct.gov>
Subject: RE: Council Incomplete Letter for EM-SPRINT-118-190502-EthanAllenHwy-Ridgefield

Please find corrected CD's and notice sent via FedEx receipt to First Selectman of Ridgefield.

Hard copies to be delivered at your office tomorrow.

Thanks,

Jeffrey Barbadora
781-970-0053
12 Gill Street, Suite 5800 Woburn, MA 01801
CrownCastle.com

From: Robidoux, Evan <Evan.Robidoux@ct.gov>
Sent: Wednesday, May 8, 2019 9:41 AM
To: Barbadora, Jeff <Jeff.Barbadora@crowncastle.com>
Cc: CSC-DL Siting Council <Siting.Council@ct.gov>
Subject: Council Incomplete Letter for EM-SPRINT-118-190502-EthanAllenHwy-Ridgefield

CAUTION: This email originated from outside of the organization. Do not click links or open attachments unless you recognize the sender and know the content is safe.

Please see the attached correspondence.

Evan Robidoux
Clerk Typist
Connecticut Siting Council
10 Franklin Square
New Britain, CT 06051

This email may contain confidential or privileged material. Use or disclosure of it by anyone other than the recipient is unauthorized. If you are not an intended recipient, please delete this email.

ORIGIN ID: BEDA (781) 970-0053
JEFF BARBADORA
CROWN CASTLE
12 GILL STREET
SUITE 5800
WOBURN, MA 01801
UNITED STATES US

SHIP DATE: 14MAY19
ACTWGT: 0.50 LB
CAD: 10492419/IN/ET/4100

BILL SENDER


TO FIRST SELECTMAN RUDY MARCONI
TOWN OF RIDGEFIELD
400 MAIN STREET

RIDGEFIELD CT 06877

REF: 17665890

(203) 431-2700
INV
PO

DEPT:

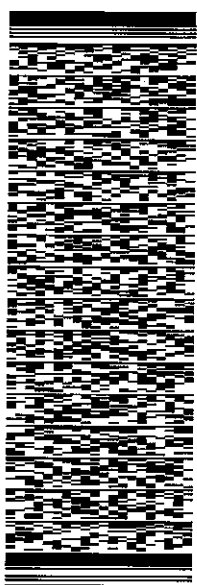


J191019010701uu

TRK# 7752 1018 1445
0201

WED - 15 MAY 10:30A
PRIORITY OVERNIGHT

EG WODA

06877
CT-US SWF

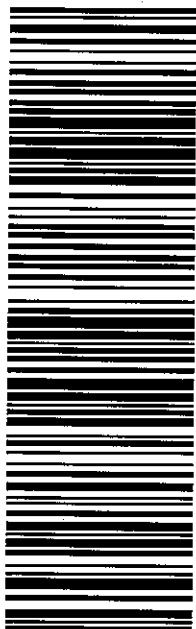

565.J1/D66C23AD

After printing this label:

1. Use the 'Print' button on this page to print your label to your laser or inkjet printer.
2. Fold the printed page along the horizontal line.
3. Place label in shipping pouch and affix it to your shipment so that the barcode portion of the label can be read and scanned.

Warning: Use only the printed original label for shipping. Using a photocopy of this label for shipping purposes is fraudulent and could result in additional billing charges, along with the cancellation of your FedEx account number.

Use of this system constitutes your agreement to the service conditions in the current FedEx Service Guide, available on fedex.com. FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1,000, e.g. jewelry, precious metals, negotiable instruments and other items listed in our Service Guide. Written claims must be filed within strict time limits, see current FedEx Service Guide.

Sprint[®]



PROJECT: DO MACRO UPGRADE

SITE NAME: REDDING / RT7

SITE CASCADE: CT23XC384

CROWN CASTLE ID: 826927 / APP 410825

SITE ADDRESS: 845 ETHAN ALLEN HIGHWAY
RIDGEFIELD, CT 06877

SITE TYPE: 100'-0"± FLAGPOLE



CROWN CASTLE
3 CORPORATE PARK DRIVE,
SUITE 101
CLIFTON PARK, NY 12065

**REDDING/RT7
CT23XC384**

CONSTRUCTION DRAWINGS		
1	05/10/19	ISSUED AS FINAL
0	03/27/19	ISSUED AS FINAL
B	03/21/19	REVISED PER COMMENTS
A	03/07/19	ISSUED FOR REVIEW



Dewberry Engineers Inc.
600 PARSIPPANY ROAD
SUITE 301
PARSIPPANY, NJ 07054
PHONE: 973.739.9400
FAX: 973.739.9710



DRAWN BY:	JC
REVIEWED BY:	BSH
CHECKED BY:	GHN
PROJECT NUMBER:	50062961
JOB NUMBER:	50108258
SITE ADDRESS:	

845 ETHAN ALLEN
HIGHWAY
RIDGEFIELD, CT 06877

SHEET TITLE

TITLE SHEET

SHEET NUMBER

T-1

SITE INFORMATION

TOWER OWNER:

CROWN CASTLE
3 CORPORATE PARK DRIVE, SUITE 101
CLIFTON PARK, NY 12065

CROWN PROJECT MANAGER:
SCOTT WIATROSKI: (201) 236-9228
SCOTT.WIATROSKI@CROWNCastle.COM

CROWN CONSTRUCTION MANAGER:
TRICIA PELON: (518) 373-3507
TRICIA.PELON@CROWNCastle.COM

SITE ADDRESS:

845 ETHAN ALLEN HIGHWAY
RIDGEFIELD, CT 06877

GEOGRAPHIC COORDINATES:

LATITUDE: 41°-18'-46.86" N, (41.313017)
LONGITUDE: 73°-28'-20.48" W, (-73.472356)

COUNTY:

FAIRFIELD COUNTY

POWER COMPANY:

CONNECTICUT LIGHT & POWER
(800) 286-2000


TELCO PROVIDER:

LIGHTOWER
(845) 458-7720


SPRINT CONSTRUCTION MANAGER:

NAME: LIZ ROMAN
E-MAIL: ELIZABETH.ROMAN@SPRINT.COM

AREA MAP

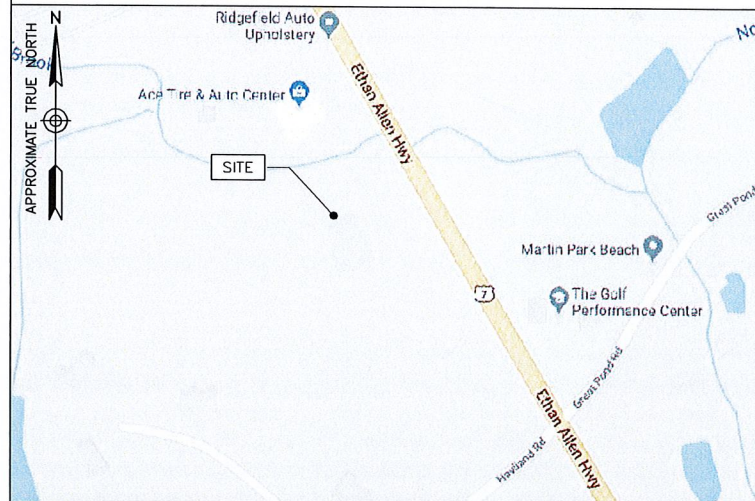

LOCATION MAP

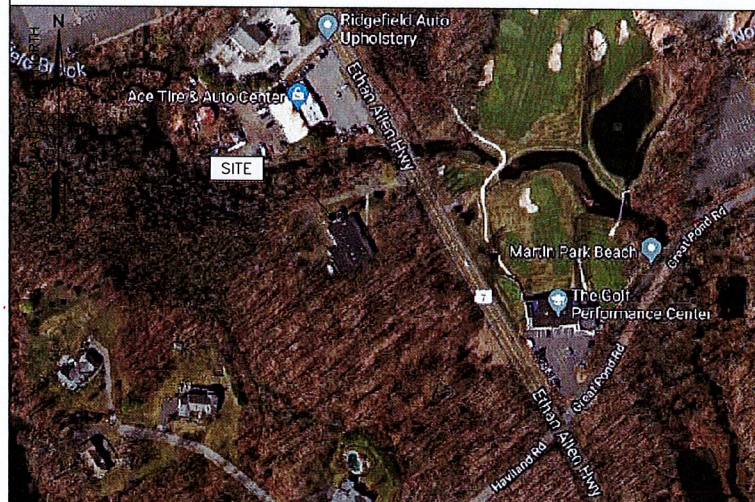

PROJECT DESCRIPTION

- REMOVE (3) PANEL ANTENNAS
- INSTALL (3) PANEL ANTENNAS
- INSTALL (6) DIPLEXERS INSIDE FLAGPOLE
- REMOVE (6) 1-1/4"Ø COAX CABLES
- INSTALL (12) 7/8"Ø COAX CABLES
- INSTALL (4) RRH'S AT GRADE
- INSTALL (6) DIPLEXERS AT GRADE
- INSTALL 2.5 EQUIPMENT IN EXISTING MMBTS CABINET ON EQUIPMENT PAD
- INSTALL BATTERY STRING IN EXISTING BATTERY CABINET ON EQUIPMENT PAD
- INSTALL THIRD RAIL OF DC BREAKERS IN EXISTING FIBER MANAGEMENT ENCLOSURE ON EQUIPMENT PAD
- INSTALL (1) 2" CONDUIT FROM EXISTING FIBER MANAGEMENT ENCLOSURE TO EXISTING MMBTS CABINET ON EQUIPMENT PAD

APPLICABLE CODES

- ALL WORK SHALL BE PERFORMED AND MATERIALS INSTALLED IN ACCORDANCE WITH THE FOLLOWING CODES AS ADOPTED BY THE LOCAL GOVERNING AUTHORITIES. NOTHING IN THESE PLANS IS TO BE CONSTRUED TO PERMIT WORK NOT CONFORMING TO THESE CODES.
- 1. BUILDING CODE: 2018 CONNECTICUT STATE BUILDING CODE.
- 2. ANSITIA (TELECOMMUNICATIONS INDUSTRY ASSOCIATION) 222-G, STRUCTURAL STANDARDS FOR STEEL ANTENNA TOWER AND ANTENNA SUPPORTING STRUCTURES.
- 3. LIGHTNING PROTECTION CODE: NFPA 780-2014 LIGHTNING PROTECTION CODE.
- 4. ELECTRICAL CODE: NATIONAL ELECTRICAL CODE 2017 (NEC 2017).
- 5. ALL STEEL WORK TO BE DONE IN ACCORDANCE WITH THE LATEST EDITION OF THE AISC "SPECIFICATION FOR THE DESIGN, FABRICATION AND ERECTION OF STRUCTURAL STEEL FOR BUILDINGS.
- 6. ANSI T1.311, FOR TELECOM - DC POWER SYSTEMS - TELECOM, ENVIRONMENTAL PROTECTION.



ONE CALL 811 OR
PHONE #: 1-800-922-4455
www.cbyd.com

SHEET INDEX

SHT NO:	SHEET TITLE:	REV:
T-1	TITLE SHEET	1
SP-1	SPRINT SPECIFICATIONS I	1
SP-2	SPRINT SPECIFICATIONS II	1
A-1	COMPOUND PLAN	1
A-2	ELEVATION & EQUIPMENT PLAN	1
A-3	EXISTING & PROPOSED ANTENNA PLANS	1
A-4	ANTENNA & EQUIPMENT DETAILS	1
A-5	CABLE ROUTING & COLOR CODING INFORMATION	1
E-1	ELECTRICAL ONE-LINE DIAGRAM & GROUNDING DETAILS	1
E-2	ELECTRICAL & GROUNDING NOTES	1

THESE OUTLINE SPECIFICATIONS IN CONJUNCTION WITH THE SPRINT STANDARD CONSTRUCTION SPECIFICATIONS, INCLUDING CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

SECTION 01 100 – SCOPE OF WORK

THE WORK:
SHALL COMPLY WITH APPLICABLE NATIONAL CODES AND STANDARDS, LATEST EDITION, AND PORTIONS THEREOF. ALSO SEE SPRINT METHOD OF PROCEDURE (MOP) AND SPRINT STANDARDS AT THE TIME OF CONSTRUCTION START.

PRECEDENCE:
SHOULD CONFLICTS OCCUR BETWEEN THE STANDARD CONSTRUCTION SPECIFICATIONS FOR WIRELESS SITES INCLUDING THE STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES AND THE CONSTRUCTION DRAWINGS, INFORMATION ON THE CONSTRUCTION DRAWINGS SHALL TAKE PRECEDENCE ALONG WITH SPRINT CONSTRUCTION MANAGER APPROVAL.

SITE FAMILIARITY:
CONTRACTOR SHALL BE RESPONSIBLE FOR FAMILIARIZING HIMSELF WITH ALL CONTRACT DOCUMENTS, FIELD CONDITIONS AND DIMENSIONS PRIOR TO PROCEEDING WITH CONSTRUCTION.

ON-SITE SUPERVISION:
THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE WORK AND SHALL BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, AND PROCEDURES IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.

DRAWINGS, SPECIFICATIONS AND DETAILS REQUIRED AT JOBSITE:
THE CONSTRUCTION CONTRACTOR SHALL MAINTAIN A FULL SET OF THE CONSTRUCTION DRAWINGS AT THE JOBSITE FROM MOBILIZATION THROUGH CONSTRUCTION COMPLETION.

- A. DETAILS ARE INTENDED TO SHOW DESIGN INTENT. PROVIDE ALL MATERIALS AND LABOR AS REQUIRED TO PROVIDE A COMPLETE AND FUNCTIONING SYSTEM. MODIFICATIONS MAY BE REQUIRED TO SUIT JOB DIMENSIONS OR CONDITIONS, AND SUCH MODIFICATIONS SHALL BE INCLUDED AS PART OF THE WORK.
- B. CONTRACTOR SHALL NOTIFY SPRINT CONSTRUCTION MANAGER OF ANY VARIATIONS PRIOR TO PROCEEDING WITH THE WORK. DIMENSIONS SHOWN ARE TO FINISH SURFACES UNLESS NOTED OTHERWISE. MODIFICATIONS MAY BE REQUIRED TO SUIT JOB DIMENSIONS OR CONDITIONS, AND SUCH MODIFICATIONS SHALL BE INCLUDED AS PART OF THE WORK.
- C. MARK THE FIELD SET OF DRAWINGS IN RED, DOCUMENTING ANY CHANGES FROM THE CONSTRUCTION DOCUMENTS.

METHODS OF PROCEDURE (MOPS) FOR CONSTRUCTION:
CONTRACTOR SHALL PERFORM WORK AS DESCRIBED IN THE FOLLOWING INSTALLATION AND COMMISSIONING MOPS. CONTRACTOR IS RESPONSIBLE TO USE LATEST MOP'S.

- A. BASE BAND UNIT IN EXISTING UNIT
- B. INSTALLATION OF BATTERIES
- C. INSTALLATION OF FIBER CABLE
- D. INSTALLATION OF RRU'S
- E. CABLING
- F. TS-0200 REV 5 – ANTENNA LINE ACCEPTANCE STANDARDS
- G. SPRINT CELL SITE ENGINEERING NOTICE – EN 2012-001, REV 1.
- H. COMMISSIONING MOPS

SECTION 01 200 – COMPANY FURNISHED MATERIAL AND EQUIPMENT

COMPANY FURNISHED MATERIAL AND EQUIPMENT IS IDENTIFIED ON THE RF DATA SHEET IN THE CONSTRUCTION DRAWINGS.

CONTRACTOR IS RESPONSIBLE FOR SPRINT PROVIDED MATERIAL AND EQUIPMENT TO ENSURE IT IS PROTECTED AND HANDLED PROPERLY THROUGHOUT THE CONSTRUCTION DURATION.

CONTRACTOR RESPONSIBLE FOR RECEIPT OF SPRINT FURNISHED EQUIPMENT AT CELL SITE OR CONTRACTOR'S LOCATION. CONTRACTOR TO COMPLETE SHIPPING AND RECEIPT DOCUMENTATION IN ACCORDANCE WITH COMPANY PRACTICE. CONTRACTOR MAY BE REQUIRED TO PICK UP MATERIAL AT LOCATION PRESCRIBED BY SPRINT.

SECTION 01 300 – CELL SITE CONSTRUCTION CO.

NOTICE TO PROCEED:
NO WORK SHALL COMMENCE PRIOR TO COMPANY'S WRITTEN NOTICE TO PROCEED AND THE ISSUANCE OF WORK ORDER.

SITE CLEANLINESS:
CONTRACTOR SHALL KEEP THE SITE FREE FROM ACCUMULATING WASTE MATERIAL, DEBRIS, AND TRASH. AT THE COMPLETION OF THE WORK, CONTRACTOR SHALL REMOVE FROM THE SITE ALL REMAINING RUBBISH, IMPLEMENTS, TEMPORARY FACILITIES, AND SURPLUS MATERIALS.

SECTION 01 400 – SUBMITTALS & TESTS

ALTERNATES:
AT THE COMPANY'S REQUEST, ANY ALTERNATIVES TO THE MATERIALS OR METHODS SPECIFIED SHALL BE SUBMITTED TO SPRINTS CONSTRUCTION MANAGER FOR APPROVAL. SPRINT WILL REVIEW AND APPROVE ONLY THOSE REQUESTS MADE IN WRITING. NO VERBAL APPROVALS WILL BE CONSIDERED.

TESTS AND INSPECTIONS:

- A. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL CONSTRUCTION TESTS, INSPECTIONS AND PROJECT DOCUMENTATION.
- B. CONTRACTOR SHALL ACCOMPLISH TESTING INCLUDING BUT NOT LIMITED TO THE FOLLOWING:
 - 1. COAX SWEEPS AND FIBER TESTS PER TS-0200 REV 5 ANTENNA LINE ACCEPTANCE STANDARDS.
 - 2. AZIMUTH AND DOWNTILT PROVIDE AN AUTOMATED REPORT UPLOADED TO SITERRA USING A COMMERCIAL MADE-FOR THE PURPOSE ELECTRONIC ANTENNA ALIGNMENT TOOL (AAT). INSTALLED AZIMUTH, CENTERLINE AND DOWNTILT MUST CONFORM WITH RF CONFIGURATION DATA
 - 3. CONTRACTOR SHALL BE RESPONSIBLE FOR ANY AND ALL CORRECTIONS TO ANY WORK IDENTIFIED AS UNACCEPTABLE IN SITE INSPECTION ACTIVITIES AND/OR AS A RESULT OF TESTING.
 - 4. ALL TESTING REQUIRED BY APPLICABLE INSTALLATION MOPS.

C. REQUIRED CLOSEOUT DOCUMENTATION INCLUDES, BUT IS NOT LIMITED TO THE FOLLOWING:

- 1. AZIMUTH, DOWNTILT, AZEL FROM SUNSIGHT INSTRUMENTS OR 32 – ANTENNA ALIGN ALIGNMENT TOOL (AAT)
- 2. SWEEP AND FIBER TESTS
- 3. SCANABLE BARCODE PHOTOGRAPHS OF TOWER TOP AND INACCESSIBLE SERIALIZED EQUIPMENT
- 4. ALL AVAILABLE JURISDICTIONAL INFORMATION
- 5. PDF SCAN OF REDLINES PRODUCED IN FIELD
- 6. A PDF SCAN OF REDLINE MARK-UPS SUITABLE FOR USE IN ELECTRONIC AS-BUILT DRAWING PRODUCTION
- 7. LIEN WAIVERS
- 8. FINAL PAYMENT APPLICATION
- 9. REQUIRED FINAL CONSTRUCTION PHOTOS
- 10. CONSTRUCTION AND COMMISSIONING CHECKLIST COMPLETE WITH NO DEFICIENT ITEMS
- 11. ALL POST NTP TASKS INCLUDING DOCUMENT UPLOADS COMPLETED IN SITERRA (SPRINTS DOCUMENT REPOSITORY OF RECORD).
- 12. CLOSEOUT PHOTOGRAPHS:
 - (i) BACK MAIN HYBRID CABLE ROUTE (MINIMUM TWO PHOTOS)
 - (ii) OF EACH ANTENNA AND RRU
 - (iii) MANUFACTURERS NAME TAG FOR ALL SERIALIZED EQUIPMENT
 - (iv) PULL AND DISTRIBUTION BOXES INTERMEDIATE BETWEEN RRU'S AND MMBS (DOOR OPEN)
 - (v) MMBS CABINET WITH DOOR OPEN SHOWING MODIFICATIONS
 - (vi) POWER CABINET, DOORS OPEN, BATTERIES INSTALLED
 - (vii) BREAK OUT CYLINDERS
 - (viii) ASR SIGNAGE FOR SPRINT OWNED TOWERS
 - (ix) RADIATION EXPOSURE WARNING SIGNS
 - (x) PHOTOGRAPH FROM EACH SECTOR FROM APPROXIMATELY RAD CENTER OF ANY NEW ANTENNA AT HORIZON.
- E. LOAD PHOTOS TO SITERRA PROJECT LIBRARY IS. IN IS CREATE NEW CATEGORY; 2.5 DEPLOYMENT, AND SECTION; PERMANENT CONSTRUCTION. LABEL PHOTOS WITH SITE CASCADE AND VIEW BEING DEPICTED. CAMERAS USED TO TAKE PHOTOGRAPHS SHALL GPS ENABLED SUCH THAT THE GPS COORDINATES ARE INCLUDED IN THE PHOTO MEDIA-FILE INFORMATION.

COMMISSIONING:
PERFORM ALL COMMISSIONING AS REQUIRED BY APPLICABLE MOPS

INTEGRATION:
PERFORM ALL INTEGRATION ACTIVITIES AS REQUIRED BY APPLICABLE MOPS

SECTION 11 700 – ANTENNA ASSEMBLY, REMOTE RADIO UNITS AND CABLE INSTALLATION

SUMMARY:
THIS SECTION SPECIFIES INSTALLATION OF ANTENNAS, RRU'S, AND CABLE EQUIPMENT, INSTALLATION, AND TESTING OF COAXIAL FIBER CABLE.

ANTENNAS AND RRU'S:
THE NUMBER AND TYPE OF ANTENNAS AND RRU'S TO BE INSTALLED IS DETAILED ON THE CONSTRUCTION DRAWINGS.

HYBRID CABLE:
HYBRID CABLE WILL BE DC/FIBER AND FURNISHED FOR INSTALLATION AT EACH SITE. CABLE SHALL BE INSTALLED PER THE CONSTRUCTION DRAWINGS AND THE APPLICABLE MANUFACTURER'S REQUIREMENTS.

JUMPERS AND CONNECTORS:
FURNISH AND INSTALL 1/2" COAX JUMPER CABLES BETWEEN THE RRU'S AND ANTENNAS. JUMPERS SHALL BE TYPE LDF 4, FLC 12-50, CR 540, OR FXL 540. SUPER-FLEX CABLES ARE NOT ACCEPTABLE. JUMPERS BETWEEN THE RRU'S AND ANTENNAS OR TOWER TOP AMPLIFIERS SHALL CONSIST OF 1/2 INCH FOAM DIELECTRIC, OUTDOOR RATED COAXIAL CABLE, MIN LENGTH FOR JUMPER SHALL BE SO AS TO ALLOW FOR THE PROPER BEND RADIUS PER MANUFACTURER OR SPRINT SPECIFICATIONS.

REMOTE ELECTRICAL TILT (RET) CABLES:

MISCELLANEOUS:
INSTALL SPLITTERS, COMBINERS, FILTERS PER RF DATA SHEET, FURNISHED BY SPRINT.

ANTENNA INSTALLATION:
THE CONTRACTOR SHALL ASSEMBLE ALL ANTENNAS ONSITE IN ACCORDANCE WITH THE INSTRUCTIONS SUPPLIED BY THE MANUFACTURER. ANTENNA HEIGHT, AZIMUTH, AND FEED ORIENTATION INFORMATION SHALL BE A DESIGNATED ON THE CONSTRUCTION DRAWINGS.

- A. THE CONTRACTOR SHALL POSITION THE ANTENNA ON TOWER PIPE MOUNTS SO THAT THE BOTTOM STRUT IS LEVEL. THE PIPE MOUNTS SHALL BE PLUMB TO WITHIN 1 DEGREE.
- B. ANTENNA MOUNTING REQUIREMENTS: PROVIDE ANTENNA MOUNTING HARDWARE AS INDICATED ON THE DRAWINGS.

FIBER CABLE INSTALLATION:

- A. THE CONTRACTOR SHALL ROUTE, TEST, AND INSTALL ALL CABLES AS INDICATED ON THE CONSTRUCTION DRAWINGS AND IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
- B. THE INSTALLED RADIUS OF THE CABLES SHALL NOT BE LESS THAN THE MANUFACTURER'S SPECIFICATIONS FOR BENDING RADII.
- C. EXTREME CARE SHALL BE TAKEN TO AVOID DAMAGE TO THE CABLES DURING HANDLING AND INSTALLATION.

1. FASTENING MAIN FIBER CABLES:

a. **LATTICE AND GUYED TOWERS:**
ALL CABLES SHALL BE PERMANENTLY FASTENED TO THE COAX LADDER AT 4'-0" OC USING NON-MAGNETIC STAINLESS STEEL CLIPS.

b. **MONOPOLE:**
ALL CABLES SHALL BE PERMANENTLY SUPPORTED WITH HOISTING GRIPS AT INTERVALS OF NO MORE THAN 200 FEET (ONE HOISTING GRIP PER COAX). A HOISTING GRIP SHOULD BE INSTALLED AT MID-POINT IF CABLE RUN EXCEEDS 200' AS WELL AS TOP SIDE.

2. FASTENING INDIVIDUAL FIBER AND DC CABLES ABOVE BREAKOUT ENCLOSURE (MEDUSA), WITHIN THE MMBS CABINET AND ANY INTERMEDIATE DISTRIBUTION BOXES:

a. FIBER: SUPPORT FIBER BUNDLES USING 1/2" VELCRO STRAPS OF THE REQUIRED LENGTH @ 18" OC. STRAPS SHALL BE UV, OIL AND WATER RESISTANT AND SUITABLE FOR INDUSTRIAL INSTALLATIONS AS MANUFACTURED BY TEXTOL OR APPROVED EQUAL.

b. DC: SUPPORT DC BUNDLES WITH ZIP TIES OF THE ADEQUATE LENGTH. ZIP TIES TO BE UV STABILIZED, BLACK NYLON, WITH TENSILE STRENGTH AT 12,000 PSI AS MANUFACTURED BY NELCO PRODUCTS OR EQUAL.

3. FASTENING JUMPERS: FASTENING OR SECURING JUMPERS SHOULD CONSIST OF STAINLESS STEEL CLIPS, 18" FROM REAR OF CONNECTOR AND 24" THEREAFTER AND AT NO TIME SHALL THEY CONTACT TOWER OR STRUCTURAL STEEL.

4. CABLE INSTALLATION:

a. INSPECT CABLE PRIOR TO USE FOR SHIPPING DAMAGE, NOTIFY THE CONSTRUCTION MANAGER.

b. CABLE ROUTING: CABLE INSTALLATION SHALL BE PLANNED TO ENSURE THAT THE LINES WILL BE PROPERLY ROUTED IN THE CABLE ENVELOP AS INDICATED ON THE DRAWINGS. AVOID TWISTING AND CROSDOVERS.

c. HOIST CABLE USING PROPER HOISTING GRIPS. DO NOT EXCEED MANUFACTURES RECOMMENDED MAXIMUM BEND RADIUS.



CROWN CASTLE
3 CORPORATE PARK DRIVE,
SUITE 101
CLIFTON PARK, NY 12065

**REDDING/RT7
CT23XC384**

CONSTRUCTION DRAWINGS		
1	05/10/19	ISSUED AS FINAL
0	03/27/19	ISSUED AS FINAL
B	03/21/19	REVISED PER COMMENTS
A	03/07/19	ISSUED FOR REVIEW

Dewberry Engineers Inc.
600 PARSIPPANY ROAD
SUITE 301
PARSIIPPANY, NJ 07054
PHONE: 973.739.9400
FAX: 973.739.9710

It is a violation of law for any person, unless they are acting under the direction of a licensed professional engineer to alter this document.

DRAWN BY: JC

REVIEWED BY: BSH

CHECKED BY: GHN

PROJECT NUMBER: 50062961

JOB NUMBER: 50108258

SITE ADDRESS:

845 ETHAN ALLEN
HIGHWAY
RIDGEFIELD, CT 06877

SHEET TITLE

SPRINT SPECIFICATIONS I

SHEET NUMBER

SP-1

CONTINUE FROM SP-1

- 5. GROUNDING OF TRANSMISSION LINES: ALL TRANSMISSION LINES SHALL BE GROUNDED AS INDICATED ON DRAWINGS.
- 6. HYBRID CABLE COLOR CODING: ALL COLOR CODING SHALL BE AS REQUIRED PER LATEST VERSION OF TS 0200.
- 7. HYBRID CABLE LABELING: INDIVIDUAL HYBRID AND DC BUNDLES SHALL BE LABELED ALPHA-NUMERICALLY ACCORDING TO SPRINT CELL SITE ENGINEERING NOTICE - EN 2012-001, REV 1

WEATHERPROOFING EXTERIOR CONNECTORS AND HYBRID CABLE GROUND KITS:

- A. ALL FIBER & COAX CONNECTORS AND GROUND KITS SHALL BE WEATHERPROOFED.
WEATHERPROOFED USING ONE OF THE FOLLOWING METHODS. ALL INSTALLATIONS MUST BE DONE IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND INDUSTRY BEST PRACTICES.
 - 1. COLD SHRINK: ENCOMPASS CONNECTOR IN COLD SHRINK TUBING AND PROVIDE A DOUBLE WRAP OF 2" ELECTRICAL TAPE EXTENDING 2" BEYOND TUBING. PROVIDE 3M COLD SHRINK CXS SERIES OR EQUAL.
 - 2. SELF-AMALGAMATING TAPE: CLEAN SURFACES. APPLY A DOUBLE WRAP OF SELF-AMALGAMATING TAPE 2" BEYOND CONNECTOR. APPLY A SECOND WRAP OF SELF-AMALGAMATING TAPE IN OPPOSITE DIRECTION. APPLY DOUBLE WRAP OF 2" WIDE ELECTRICAL TAPE EXTENDING 2" BEYOND THE SELF-AMALGAMATING TAPE.
 - 3. 3M SLIM LOCK CLOSURE 716: SUBSTITUTIONS WILL NOT BE ALLOWED.
 - 4. OPEN FLAME ON JOB SITE IS NOT ACCEPTABLE.

SECTION 11 800 - INSTALLATION OF MULTIMODAL BASE STATIONS (MMBTS) AND RELATED EQUIPMENT

SUMMARY:

- A. THIS SECTION SPECIFIES MMBTS CABINETS, POWER CABINETS, AND INTERNAL EQUIPMENT INCLUDING BUT NOT LIMITED TO RECTIFIERS, POWER DISTRIBUTION UNITS, BASE BAND UNITS, SURGE ARRESTORS, BATTERIES, AND SIMILAR EQUIPMENT FURNISHED BY THE COMPANY FOR INSTALLATION BY THE CONTRACTOR (OFC)
- B. CONTRACTOR SHALL PROVIDE AND INSTALL ALL MISCELLANEOUS MATERIALS AND PROVIDE ALL LABOR REQUIRED FOR INSTALLATION EQUIPMENT IN EXISTING CABINET OR NEW CABINET AS SHOWN ON DRAWINGS AND AS REQUIRE BY THE APPLICABLE INSTALLATION MOPS.
- C. COMPLY WITH MANUFACTURERS INSTALLATION AND START-UP REQUIREMENTS

DC CIRCUIT BREAKER LABELING

- A. NEW DC CIRCUIT IS REQUIRED IN MMBTS CABINET SHALL BE CLEARLY IDENTIFIED AS TO RRU BEING SERVICED

SECTION 26 100 - BASIC ELECTRICAL REQUIREMENTS

SUMMARY:

THIS SECTION SPECIFIES BASIC ELECTRICAL REQUIREMENTS FOR SYSTEMS AND COMPONENTS.

QUALITY ASSURANCE:

- A. ALL EQUIPMENT FURNISHED UNDER DIVISION 26 SHALL CARRY UL LABELS AND LISTINGS WHERE SUCH LABELS AND LISTINGS ARE AVAILABLE IN THE INDUSTRY.
- B. MANUFACTURERS OF EQUIPMENT SHALL HAVE A MINIMUM OF THREE YEARS EXPERIENCE WITH THEIR EQUIPMENT INSTALLED AND OPERATING IN THE FIELD IN A USE SIMILAR TO THE PROPOSED USE FOR THIS PROJECT.
- C. MANUFACTURERS OF EQUIPMENT: ALL MATERIALS AND EQUIPMENT SPECIFIED IN DIVISION 26 OF THE SAME TYPE SHALL BE OF THE SAME MANUFACTURER AND SHALL BE NEW, OF THE BEST QUALITY AND DESIGN, AND FREE FROM DEFECTS.

SUPPORTING DEVICES:

- A. ALL EQUIPMENT FURNISHED UNDER DIVISION 26 SHALL CARRY UL LABELS AND LISTINGS WHERE SUCH LABELS AND LISTINGS ARE AVAILABLE IN THE INDUSTRY.

MANUFACTURERS OF EQUIPMENT SHALL HAVE A MINIMUM OF THREE YEARS EXPERIENCE WITH THEIR EQUIPMENT INSTALLED AND OPERATING IN THE FIELD IN A USE SIMILAR TO THE PROPOSED USE FOR THIS PROJECT.

MANUFACTURERS OF EQUIPMENT:

ALL MATERIALS AND EQUIPMENT SPECIFIED IN DIVISION 26 OF THE SAME TYPE SHALL BE OF THE SAME MANUFACTURER AND SHALL BE NEW, OF THE BEST QUALITY AND DESIGN, AND FREE FROM DEFECTS.

SUPPORTING DEVICES:

- A. MANUFACTURED STRUCTURAL SUPPORT MATERIALS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS BY THE FOLLOWING.
 - 1. ALLIED TUBE AND CONDUIT
 - 2. B-LINE SYSTEM
 - 3. UNISTRUT DIVERSIFIED PRODUCTS
 - 4. THOMAS & BETTS

- B. FASTENERS: TYPES, MATERIALS, AND CONSTRUCTION FEATURES AS FOLLOWS:
 - 1. EXPANSION ANCHORS: CARBON STEEL WEDGE OR SLEEVE TYPE.
 - 2. POWER-DRIVEN THREADED STUDS: HEAT-TREATED STEEL, DESIGNED SPECIFICALLY FOR THE INTENDED SERVICE.
 - 3. FASTEN BY MEANS OF WOOD SCREWS ON WOOD.
 - 4. TOGGLE BOLTS ON HOLLOW MASONRY UNITS.
 - 5. CONCRETE INSERTS OR EXPANSION BOLTS ON CONCRETE OR SOLID MASONRY.
 - 6. MACHINE SCREWS, WELDED THREADED STUDS, OR SPRING-TENSION CLAMPS ON STEEL.
 - 7. EXPLOSIVE DEVICES FOR ATTACHING HANGERS TO STRUCTURE SHALL NOT BE PERMITTED.
 - 8. DO NOT WELD CONDUIT, PIPE STRAPS, OR ITEMS OTHER THAN THREADED STUDS TO STEEL STRUCTURES.
 - 9. IN PARTITIONS OF LIGHT STEEL CONSTRUCTION, USE SHEET METAL SCREWS.

SUPPORTING DEVICES:

- A. INSTALL SUPPORTING DEVICES TO FASTEN ELECTRICAL COMPONENTS SECURELY AND PERMANENTLY IN ACCORDANCE WITH NEC.
- B. COORDINATE WITH THE BUILDING STRUCTURAL SYSTEM AND WITH OTHER TRADES.
- C. UNLESS OTHERWISE INDICATED ON THE DRAWINGS, FASTEN ELECTRICAL ITEMS AND THEIR SUPPORTING HARDWARE SECURELY TO THE STRUCTURE IN ACCORDANCE WITH THE FOLLOWING:
- D. ENSURE THAT THE LOAD APPLIED BY ANY FASTENER DOES NOT EXCEED 25 PERCENT OF THE PROOF TEST LOAD.
- E. USE VIBRATION AND SHOCK-RESISTANT FASTENERS FOR ATTACHMENTS TO CONCRETE SLABS.

ELECTRICAL IDENTIFICATION:

- A. UPDATE AND PROVIDE TYPED CIRCUIT BREAKER SCHEDULES IN THE MOUNTING BRACKET, INSIDE DOORS OF AC PANEL BOARDS WITH ANY CHANGES MADE TO THE AC SYSTEM.
- B. BRANCH CIRCUITS FEEDING AVIATION OBSTRUCTION LIGHTING EQUIPMENT SHALL BE CLEARLY IDENTIFIED AS SUCH AT THE BRANCH CIRCUIT PANELOAD.

SECTION 26 200 - ELECTRICAL MATERIALS AND EQUIPMENT CONDUIT:

- A. RIGID GALVANIZED STEEL (RGS) CONDUIT SHALL BE USED FOR EXTERIOR LOCATIONS ABOVE GROUND AND IN UNFINISHED INTERIOR LOCATIONS AND FOR ENCASED RUNS IN CONCRETE. RIGID CONDUIT AND FITTINGS SHALL BE STEEL, COATED WITH ZINC EXTERIOR AND INTERIOR BY THE HOT DIP GALVANIZING PROCESS. CONDUIT SHALL BE PRODUCED TO ANSI SPECIFICATIONS C80.1, FEDERAL SPECIFICATION WW-C-581 AND SHALL BE LISTED WITH THE UNDERWRITERS' LABORATORIES. FITTINGS SHALL BE THREADED - SET SCREW OR COMPRESSION FITTINGS WILL NOT BE ACCEPTABLE. RGS CONDUITS SHALL BE MANUFACTURED BY ALLIED, REPUBLIC OR WHEATLAND.
- B. UNDERGROUND CONDUIT IN CONCRETE SHALL BE POLYVINYLCHLORIDE (PVC) SUITABLE FOR DIRECT BURIAL AS APPLICABLE. JOINTS SHALL BE BELLED, AND FLUSH SOLVENT WELDED IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS. CONDUIT SHALL BE CARLON ELECTRICAL PRODUCTS OR APPROVED EQUAL.
- C. TRANSITIONS BETWEEN PVC AND RIGID (RGS) SHALL BE MADE WITH PVC COATED METALLIC LONG SWEEP RADIUS ELBOWS.
- D. EMT OR RIGID GALVANIZED STEEL CONDUIT MAY BE USED IN FINISHED SPACES CONCEALED IN WALLS AND CEILING. EMT SHALL BE MILD STEEL, ELECTRICALLY WELDED, ELECTRO-GALVANIZED OR HOT-DIPPED GALVANIZED AND PRODUCED TO ANSI SPECIFICATION C80.3, FEDERAL SPECIFICATION WW-C-563, AND SHALL BE UL LISTED. EMT SHALL BE MANUFACTURED BY ALLIED, REPUBLIC OR WHEATLAND, OR APPROVED EQUAL. FITTINGS SHALL BE METALLIC COMPRESSION. SET SCREW CONNECTIONS SHALL NOT BE ACCEPTABLE.

- E. LIQUID TIGHT FLEXIBLE METALLIC CONDUIT SHALL BE USED FOR FINAL CONNECTION TO EQUIPMENT. FITTINGS SHALL BE METALLIC GLAND TYPE COMPRESSION FITTINGS, MAINTAINING THE INTEGRITY OF CONDUIT SYSTEM. SET SCREW CONNECTIONS SHALL NOT BE ACCEPTABLE. MAXIMUM LENGTH ON FLEXIBLE CONDUIT SHALL NOT EXCEED 6- FEET. LFMC SHALL BE PROTECTED AND SUPPORTED AS REQUIRE BY NEC. MANUFACTURERS OF FLEXIBLE CONDUITS SHALL BE CAROL, ANACONDA METAL HOSE OR UNIVERSAL METAL HOSE, OR APPROVED EQUAL.
- F. MINIMUM SIZE CONDUIT SHALL BE 3/4 INCH (21MM).

HUBS AND BOXES:

- A. AT ENTRANCES TO CABINETS OR OTHER EQUIPMENT NOT HAVING INTEGRAL THREADED HUBS PROVIDE METALLIC THREADED HUBS OF THE SIZE AND CONFIGURATION REQUIRED. HUB SHALL INCLUDE LOCKNUT AND NEOPRENE O-RING SEAL. PROVIDE IMPACT RESISTANT 105 DEGREE C PLASTIC BUSHINGS TO PROTECT CABLE INSULATION.
- B. CABLE TERMINATION FITTINGS FOR CONDUIT
 - 1. CABLE TERMINATIONS FOR RGS CONDUITS SHALL BE TYPE CRC BY O-Z/GEDNEY OR EQUAL BY ROX TEC.
 - 2. CABLE TERMINATORS FOR LFMC SHALL BE ETCO - CL2075; OR MADE FOR THE PURPOSE PRODUCTS BY ROXTEC.
- C. EXTERIOR PULL BOXES AND PULL BOXES IN INTERIOR INDUSTRIAL AREAS SHALL BE PLATED CAST ALLOY, HEAVY DUTY, WEATHERPROOF, DUST PROOF, WITH GASKET, PLATED IRON ALLOY COVER AND STAINLESS STEEL COVER SCREWS, CROUSE-HINDS WAB SERIES OR EQUAL.
- D. CONDUIT OUTLET BODIES SHALL BE PLATED CAST ALLOY WITH SIMILAR GASKETED COVERS. OUTLET BODIES SHALL BE OF THE CONFIGURATION AND SIZE SUITABLE FOR THE APPLICATION. PROVIDE CROUSE-HINDS FORM B OR EQUAL.
- E. MANUFACTURER FOR BOXES AND COVERS SHALL BE HOFFMAN, SQUARE "D", CROUSE-HINDS, COPPER, ADALET, APPLETON, O-Z GEDNEY, RAGO, OR APPROVED EQUAL.

SUPPLEMENTAL GROUNDING SYSTEM

- A. FURNISH AND INSTALL A SUPPLEMENTAL GROUNDING SYSTEM TO THE EXTENT INDICATED ON THE DRAWINGS. SUPPORT SYSTEM WITH NON-MAGNETIC STAINLESS STEEL CLIPS WITH RUBBER GROMMETS. GROUNDING CONNECTORS SHALL BE TINNED COPPER WIRE. SIZES AS INDICATED ON THE DRAWINGS. PROVIDE STRANDED OR SOLID BARE OR INSULATED CONDUCTORS EXCEPTED AS OTHERWISE NOTED.
- B. SUPPLEMENTAL GROUNDING SYSTEM: ALL CONNECTIONS TO BE MADE WITH CAD WELDS, EXCEPT AT EQUIPMENT USE LUGS OR OTHER AVAILABLE GROUNDING MEANS AS REQUIRED BY MANUFACTURER; AT GROUND BARS USE TWO HOLE SPADES WITH NO OX.
- C. STOLEN GROUND-BARS: IN THE EVENT OF STOLEN GROUND BARS, CONTACT SPRINT CM FOR REPLACEMENT INSTRUCTION USING THREADED ROD KITS.

EXISTING STRUCTURE:

- A. EXISTING EXPOSED WIRING AND ALL EXPOSED OUTLETS, RECEPTACLES, SWITCHES, DEVICES, BOXES, AND OTHER EQUIPMENT THAT ARE NOT TO BE UTILIZED IN THE COMPLETED PROJECT SHALL BE REMOVED OR DE-ENERGIZED AND CAPPED IN THE WALL, CEILING, OR FLOOR SO THAT THEY ARE CONCEALED AND SAFE. WALL, CEILING, OR FLOOR SHALL BE PATCHED TO MATCH THE ADJACENT CONSTRUCTION.

CONDUIT AND CONDUCTOR INSTALLATION:

- A. CONDUITS SHALL BE FASTENED SECURELY IN PLACE WITH APPROVED NON-PERFORATED STRAPS AND HANGERS. EXPLOSIVE DEVICES FOR ATTACHING HANGERS TO STRUCTURE WILL NOT BE PERMITTED. CLOSELY FOLLOW THE LINES OF THE STRUCTURE, MAINTAIN CLOSE PROXIMITY TO THE STRUCTURE AND KEEP CONDUITS IN TIGHT ENVELOPES. CHANGES IN DIRECTION TO ROUTE AROUND OBSTACLES SHALL BE MADE WITH CONDUIT OUTLET BODIES. CONDUIT SHALL BE INSTALLED IN A NEAT AND WORKMANLIKE MANNER, PARALLEL AND PERPENDICULAR TO STRUCTURE WALL AND CEILING LINES. ALL CONDUIT SHALL BE FISHED TO CLEAR OBSTRUCTIONS. ENDS OF CONDUITS SHALL BE TEMPORARILY CAPPED TO PREVENT CONCRETE, PLASTER OR DIRT FROM ENTERING. CONDUITS SHALL BE RIGIDLY CLAMPED TO BOXES BY GALVANIZED MALLEABLE IRON BUSHING ON INSIDE AND GALVANIZED MALLEABLE IRON LOCKNUT ON OUTSIDE AND INSIDE.
- B. CONDUCTORS SHALL BE PULLED IN ACCORDANCE WITH ACCEPTED GOOD PRACTICE.

GENERAL NOTES:

- A. CONTRACTOR, SUBCONTRACTORS AND ANY SITE SPECIFIC PART/ PRODUCT/ CONCEALMENT MANUFACTURER TO FIELD VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS PRIOR TO MANUFACTURING, FABRICATION OR CONSTRUCTION.
- B. THE APPLICANT, OR HIS REPRESENTATIVE, IS TO DESIGNATE AN INDIVIDUAL RESPONSIBLE FOR CONSTRUCTION SITE SAFETY DURING THE COURSE OF SITE IMPROVEMENTS PURSUANT TO N.J.A.C. 5:23-2.21 (E) OF THE N.J. UNIFORM CONSTRUCTION CODE AND CRT 1926.32 (F, OSHA COMPETENT PERSON).



CROWN CASTLE
3 CORPORATE PARK DRIVE,
SUITE 101
CLIFTON PARK, NY 12065


REDDING/RT7
CT23XC384

CONSTRUCTION DRAWINGS

1	05/10/19	ISSUED AS FINAL
0	03/27/19	ISSUED AS FINAL
B	03/21/19	REVISED PER COMMENTS
A	03/07/19	ISSUED FOR REVIEW



Dewberry Engineers Inc.
600 PARSIPPANY ROAD
SUITE 901
PARSIPPANY, NJ 07054
PHONE: 973.739.9400
FAX: 973.739.9710

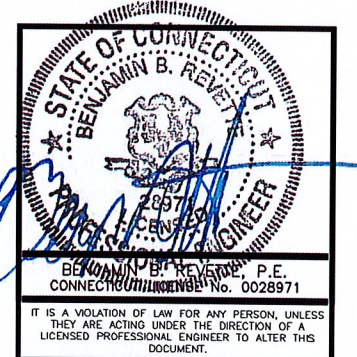

DRAWN BY:	JC
REVIEWED BY:	BSH
CHECKED BY:	GHN
PROJECT NUMBER:	50062961
JOB NUMBER:	50108258
SITE ADDRESS:	

845 ETHAN ALLEN
HIGHWAY
RIDGEFIELD, CT 06877

SHEET TITLE

SPRINT SPECIFICATIONS II

SHEET NUMBER

SP-2



CROWN CASTLE
3 CORPORATE PARK DRIVE,
SUITE 101
CLIFTON PARK, NY 12065


**REDDING/RT7
CT23XC384**

CONSTRUCTION DRAWINGS

1	05/10/19	ISSUED AS FINAL
0	03/27/19	ISSUED AS FINAL
B	03/21/19	REVISED PER COMMENTS
A	03/07/19	ISSUED FOR REVIEW



Dewberry Engineers Inc.
600 PARSIPPANY ROAD
SUITE 301
PARSIPPANY, NJ 07054
PHONE: 973.739.9100
FAX: 973.739.9710

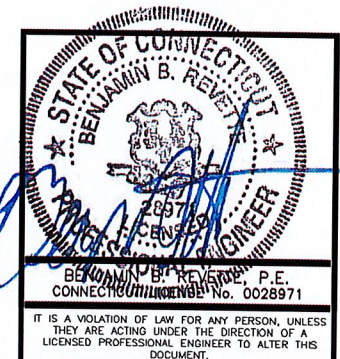

DRAWN BY:	JC
REVIEWED BY:	BSH
CHECKED BY:	GHN
PROJECT NUMBER:	50062961
JOB NUMBER:	50108258
SITE ADDRESS:	



845 ETHAN ALLEN
HIGHWAY
RIDGEFIELD, CT 06877

SHEET TITLE

COMPOUND PLAN


SHEET NUMBER

A-1

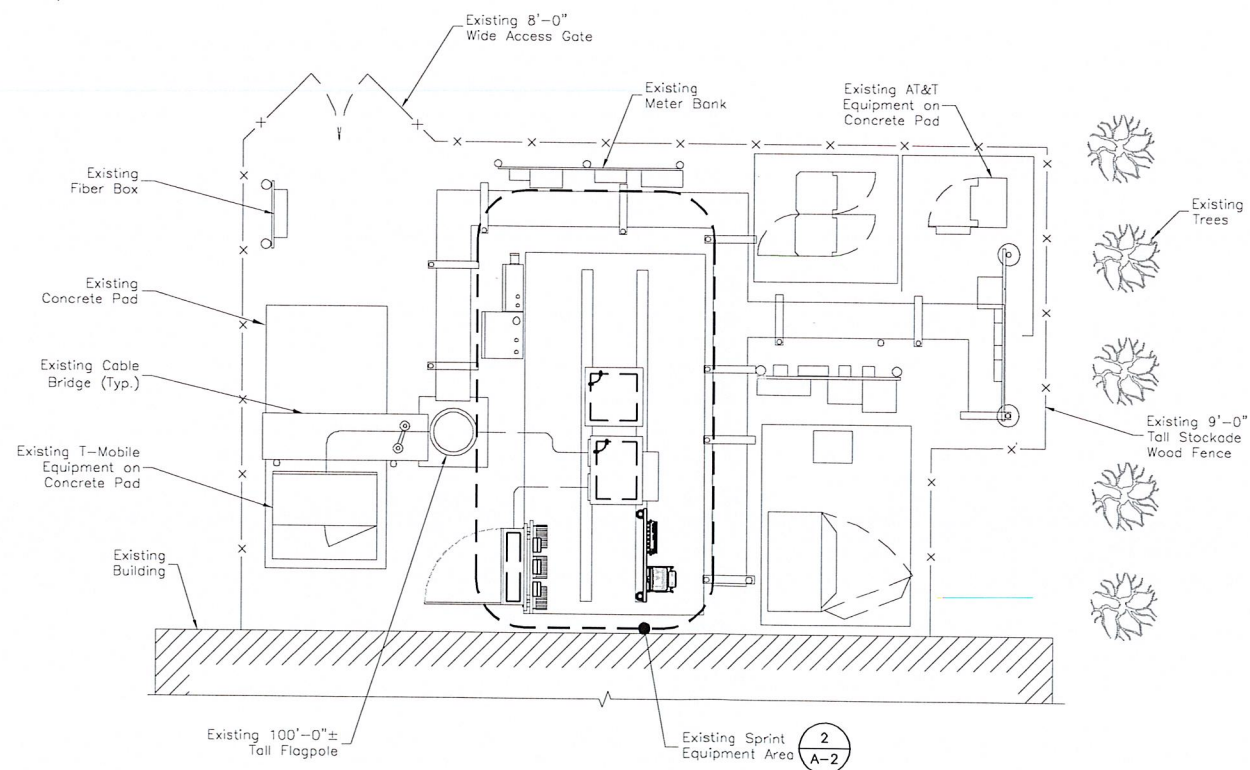

COMPOUND PLAN

SCALE: 1/8"=1' FOR 11"x17"
1/4"=1' FOR 22"x34"



NOTE:

EXISTING INFORMATION SHOWN HEREON IS BASED ON INFORMATION PROVIDED BY CROWN CASTLE. NO FIELD VISIT WAS PERFORMED BY DEWBERRY.



CROWN CASTLE
3 CORPORATE PARK DRIVE,
SUITE 101
CLIFTON PARK, NY 12065


**REDDING/RT7
CT23XC384**

CONSTRUCTION DRAWINGS

1	05/10/19	ISSUED AS FINAL
0	03/27/19	ISSUED AS FINAL
B	03/21/19	REVISED PER COMMENTS
A	03/07/19	ISSUED FOR REVIEW



Dewberry Engineers Inc.
600 PARSIPPANY ROAD
SUITE 301
PARSIPPANY, NJ 07054
PHONE: 973.739.9400
FAX: 973.739.9710

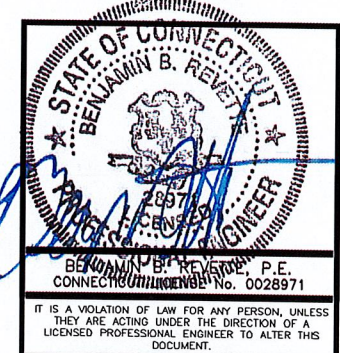

DRAWN BY:	JC
REVIEWED BY:	BSH
CHECKED BY:	GHN
PROJECT NUMBER:	50062961
JOB NUMBER:	50108258
SITE ADDRESS:	


845 ETHAN ALLEN
HIGHWAY
RIDGEFIELD, CT 06877

SHEET TITLE


ELEVATION &
EQUIPMENT PLAN

SHEET NUMBER

A-2

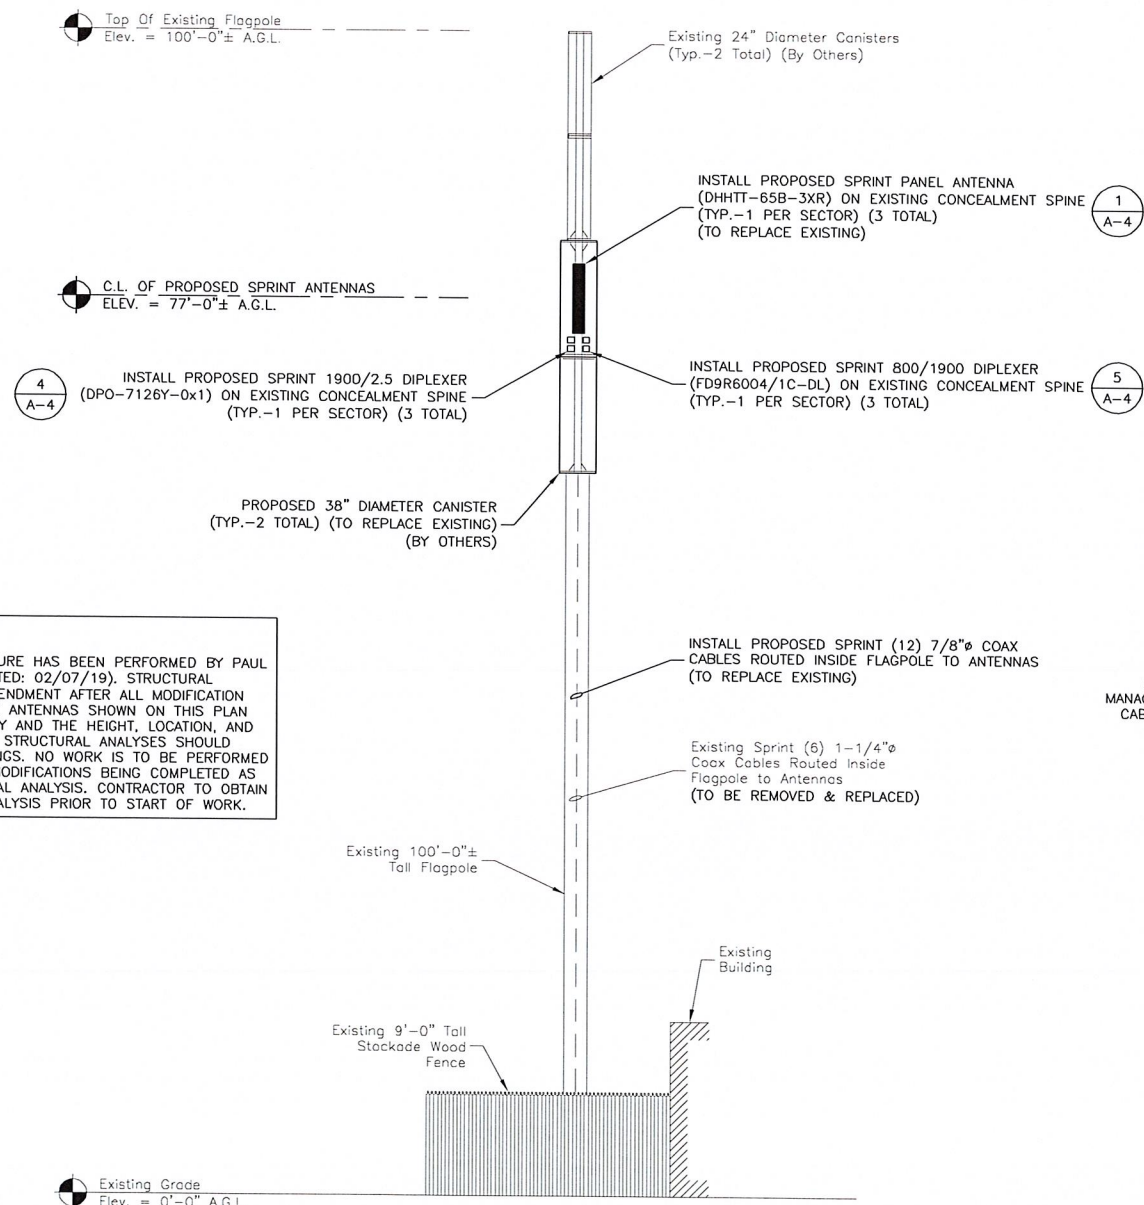

ELEVATION
SCALE: 1/16"=1' FOR 11"x17"
1/8"=1' FOR 22"x34"
0' 4' 8' 16'

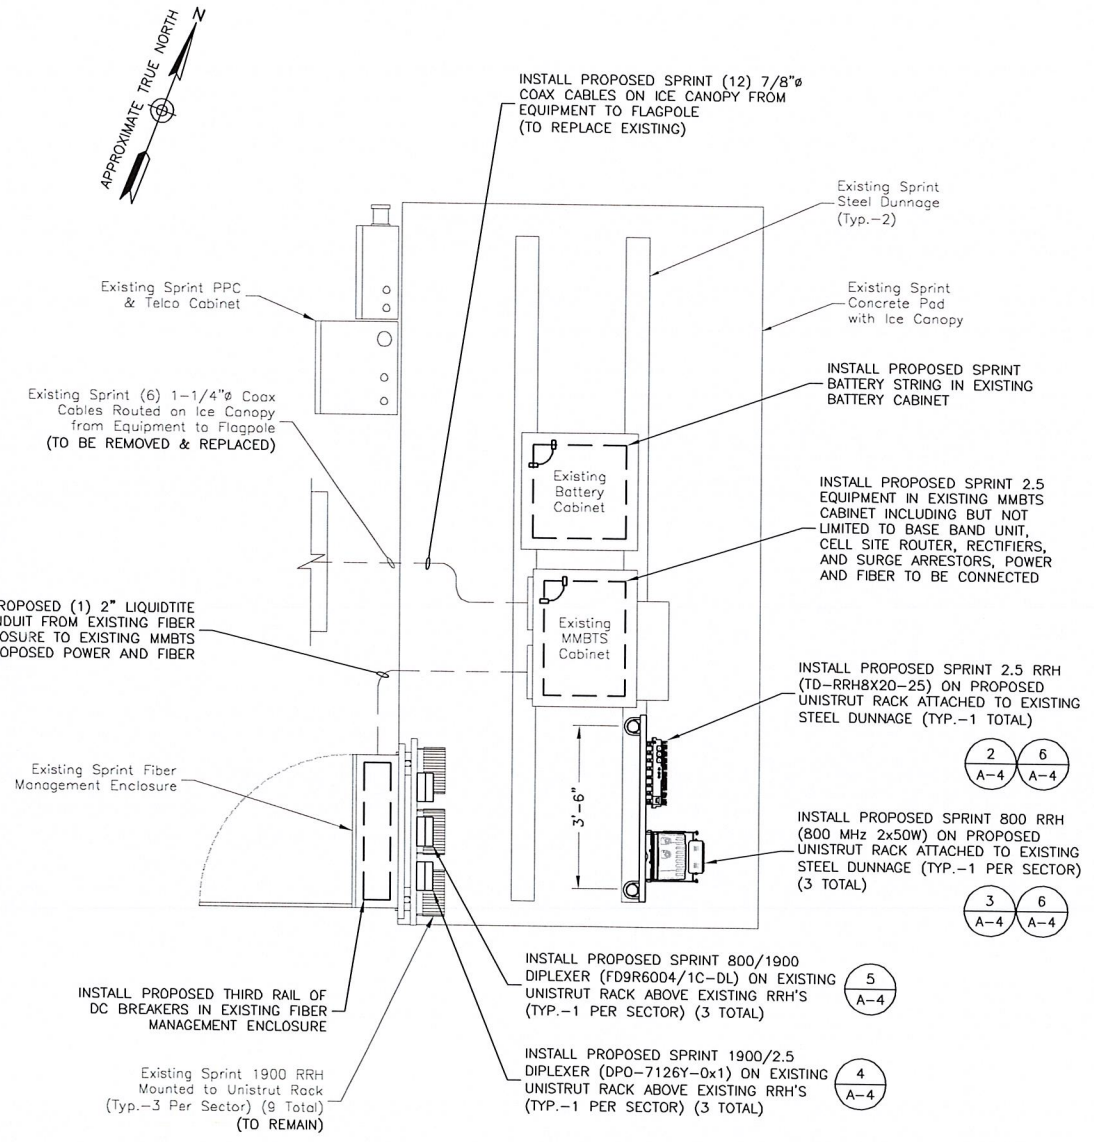

EQUIPMENT PLAN
SCALE: 1/4"=1' FOR 11"x17"
1/2"=1' FOR 22"x34"
0' 1' 2' 4'

NOTE:
ANALYSIS OF THE STRUCTURE HAS BEEN PERFORMED BY PAUL J. FORD & COMPANY (DATED: 02/07/19). STRUCTURAL ANALYSIS SUBJECT TO AMENDMENT AFTER ALL MODIFICATION WORK IS COMPLETED. THE ANTENNAS SHOWN ON THIS PLAN ARE FOR REFERENCE ONLY AND THE HEIGHT, LOCATION, AND MOUNTING SHOWN IN THE STRUCTURAL ANALYSES SHOULD SUPERSEDE THESE DRAWINGS. NO WORK IS TO BE PERFORMED PRIOR TO ANY AND ALL MODIFICATIONS BEING COMPLETED AS SHOWN IN THE STRUCTURAL ANALYSIS. CONTRACTOR TO OBTAIN COPY OF STRUCTURAL ANALYSIS PRIOR TO START OF WORK.

NOTE:
EXISTING INFORMATION SHOWN HEREON IS BASED ON INFORMATION PROVIDED BY CROWN CASTLE. NO FIELD VISIT WAS PERFORMED BY DEWBERRY.

NOTE:
1. CONTRACTOR TO CONFIRM SPACE IS AVAILABLE FOR THE PROPOSED RRH RACK & REACH OUT TO ENGINEER FOR A REDESIGN IF SPACE IS UNAVAILABLE.



CROWN CASTLE
 3 CORPORATE PARK DRIVE,
 SUITE 101
 CLIFTON PARK, NY 12065


**REDDING/RT7
 CT23XC384**

CONSTRUCTION DRAWINGS

1	05/10/19	ISSUED AS FINAL
0	03/27/19	ISSUED AS FINAL
B	03/21/19	REVISED PER COMMENTS
A	03/07/19	ISSUED FOR REVIEW



Dewberry Engineers Inc.
 600 PARSIPPANY ROAD
 SUITE 301
 PARSIPPANY, NJ 07054
 PHONE: 973.739.9400
 FAX: 973.739.9710

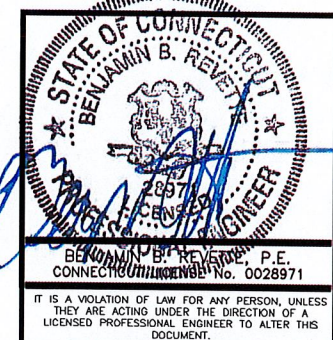

DRAWN BY:	JC
REVIEWED BY:	BSH
CHECKED BY:	GHN
PROJECT NUMBER:	50062961
JOB NUMBER:	50108258
SITE ADDRESS:	


845 ETHAN ALLEN
 HIGHWAY
 RIDGEFIELD, CT 06877

SHEET TITLE


EXISTING & PROPOSED
 ANTENNA PLANS

SHEET NUMBER

A-3

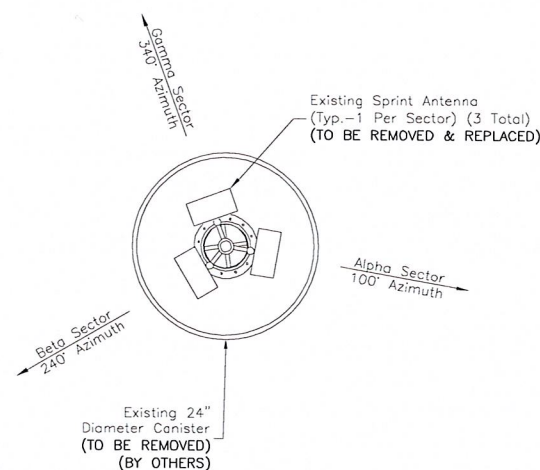


EXISTING ANTENNA LAYOUT 1
 SCALE: N.T.S.

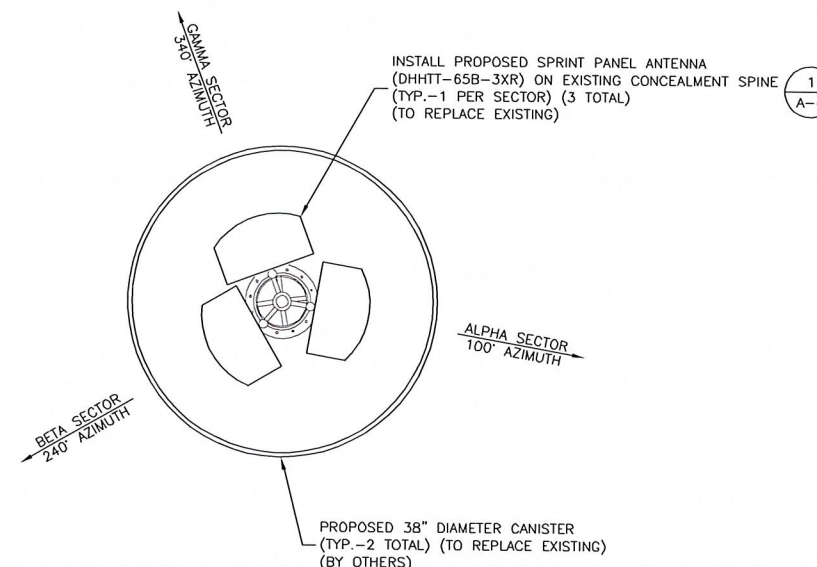

PROPOSED ANTENNA LAYOUT 2
 SCALE: N.T.S.

NOTE:
 EXISTING INFORMATION SHOWN HEREON IS BASED
 ON INFORMATION PROVIDED BY CROWN CASTLE.

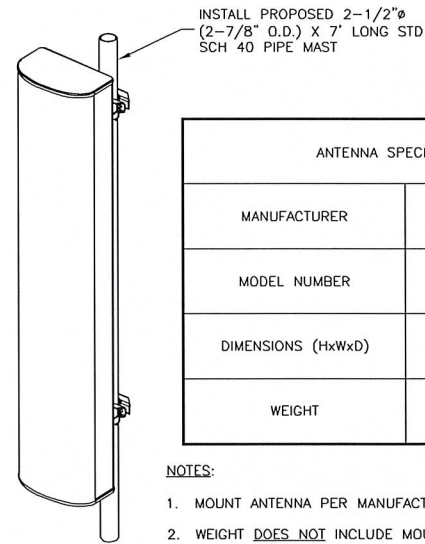


ANTENNA SPECIFICATIONS	
MANUFACTURER	COMMSCOPE
MODEL NUMBER	DHHTT65B-3XR
DIMENSIONS (HxWxD)	72.1" x 11.9" x 7.1"
WEIGHT	45.4 LBS

- NOTES:
1. MOUNT ANTENNA PER MANUFACTURER'S RECOMMENDATIONS.
 2. WEIGHT DOES NOT INCLUDE MOUNTING BRACKETS.

CONTRACTOR IS RESPONSIBLE FOR VERIFYING EXISTING CONDITIONS AND IDENTIFYING ANY EXISTING CONFLICTS (INCLUDING BUT NOT LIMITED TO EXISTING COAXIAL CABLES, SAFETY CLIMBS, ETC) AND DETERMINING TEMPORARY BRACING OR RELOCATION REQUIRED FOR INSTALLATION OF THE PROPOSED EQUIPMENT. CONTRACTOR TO CONTACT ENGINEER AND SPRINT CM IMMEDIATELY IN CASE OF ANY CONFLICTS. THE CONTRACTOR SHALL RESTORE ALL RELOCATED ITEMS TO PREVIOUS CONDITIONS.

ISOMETRIC ANTENNA DETAIL
SCALE: N.T.S.


NOTE:
COMPLY WITH MANUFACTURERS INSTRUCTIONS TO ENSURE THAT ALL RRH'S RECEIVE ELECTRICAL POWER WITHIN 24 HOURS OF BEING REMOVED FROM THE MANUFACTURER'S PACKAGING. DO NOT OPEN RRH PACKAGES IN THE RAIN.

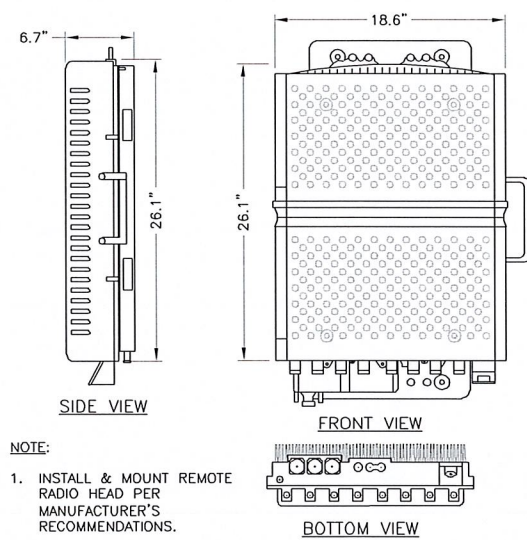

- NOTE:
1. INSTALL & MOUNT REMOTE RADIO HEAD PER MANUFACTURER'S RECOMMENDATIONS.


MANUFACTURER	ALCATEL-LUCENT
MODEL NUMBER	TD-RRHx20-25
DIMENSIONS (HxWxD)	26.1" x 18.6" x 6.71"
WEIGHT	70 LBS

2.5 RRH DETAIL
SCALE: N.T.S.

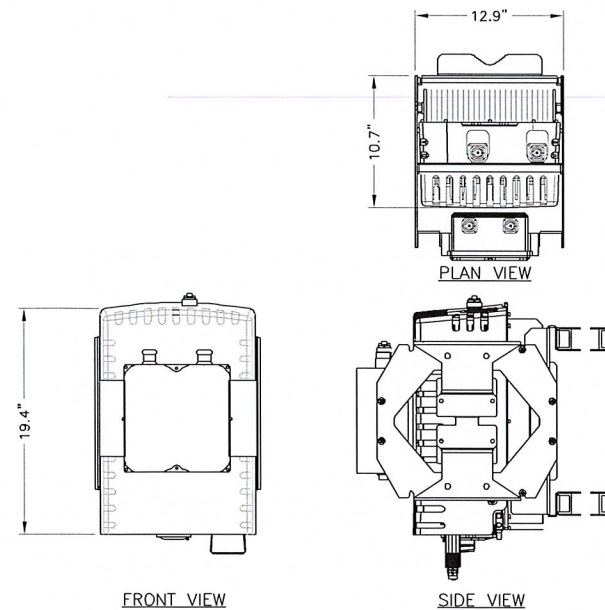

MANUFACTURER	ALCATEL-LUCENT
MODEL NUMBER	800 MHz 2x50W
DIMENSIONS (HxWxD)	19.4" x 12.9" x 10.7"
WEIGHT	50 LBS


800 MHz RRH DETAIL
SCALE: N.T.S.

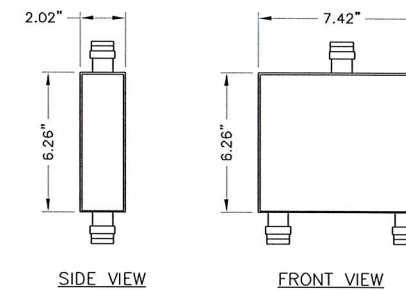

MANUFACTURER	CCI
MODEL NUMBER	DPO-7126Y-0x1
DIMENSIONS (HxWxD)	6.26" x 7.42" x 2.02"
WEIGHT	3.7 LBS

- NOTE:
1. INSTALL & MOUNT DIPLEXER PER MANUFACTURER'S RECOMMENDATIONS.


1900/2.5 DIPLEXER DETAIL
SCALE: N.T.S.

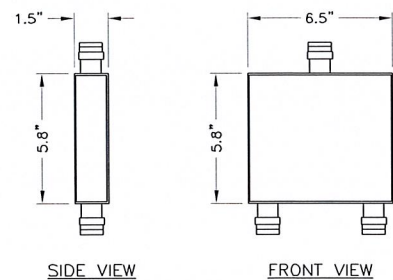

MANUFACTURER	RFS
MODEL NUMBER	FD9R6004/1C-DL
DIMENSIONS (HxWxD)	5.8" x 6.5" x 1.5"
WEIGHT	2.6 LBS

- NOTE:
1. INSTALL & MOUNT DIPLEXER PER MANUFACTURER'S RECOMMENDATIONS.

800/1900 DIPLEXER DETAIL
SCALE: N.T.S.

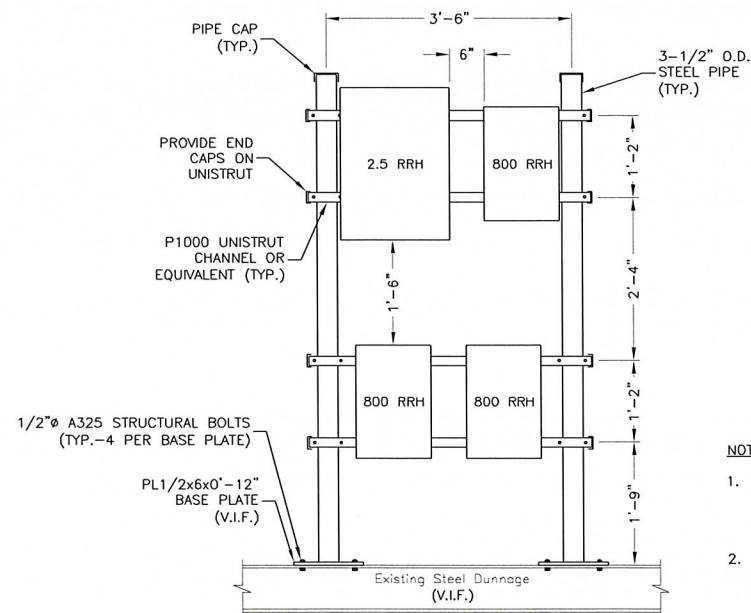

- NOTES:
1. CONTRACTOR TO CONFIRM SPACE IS AVAILABLE FOR THE PROPOSED RRH RACK & REACH OUT TO ENGINEER FOR A REDESIGN IF SPACE IS UNAVAILABLE.
 2. CONTRACTOR TO FIELD VERIFY SIZE OF EXISTING STEEL DUNNAGE PRIOR TO FABRICATION OF BASE PLATES. BASE PLATE WIDTH TO MATCH WIDTH OF STEEL DUNNAGE FLANGE.

RRH RACK MOUNTING DETAIL
SCALE: N.T.S.

ANTENNA SECTOR EQUIPMENT SCHEDULE								
SECTOR	ANTENNA MODEL	TECHNOLOGY	AZIMUTH	RAD CENTER	RRH COUNT	RRH MODEL	ADDITIONAL EQUIPMENT	CABLE FEEDER
ALPHA	(P) DHHTT65B-3XR	2.5/800 MHz	100°	77°-0"	1	(P) 2.5 RRH	(P) 1900/2.5 DIPLEXER	(P) 7/8"φ COAX CABLES
		1900 MHz	100°	77°-0"	1	(E) 1900 RRH	(P) 800/1900 DIPLEXER	
BETA	(P) DHHTT65B-3XR	2.5/800 MHz	240°	77°-0"	-	-	(P) 1900/2.5 DIPLEXER	(P) 7/8"φ COAX CABLES
		1900 MHz	240°	77°-0"	1	(E) 1900 RRH	(P) 800/1900 DIPLEXER	
GAMMA	(P) DHHTT65B-3XR	2.5/800 MHz	340°	77°-0"	-	-	(P) 1900/2.5 DIPLEXER	(P) 7/8"φ COAX CABLES
		1900 MHz	340°	77°-0"	1	(E) 1900 RRH	(P) 800/1900 DIPLEXER	

ANTENNA SCHEDULE
SCALE: N.T.S.



CROWN CASTLE
3 CORPORATE PARK DRIVE,
SUITE 101
CLIFTON PARK, NY 12065

**REDDING/RT7
CT23XC384**

CONSTRUCTION DRAWINGS

1	05/10/19	ISSUED AS FINAL
0	03/27/19	ISSUED AS FINAL
B	03/21/19	REVISED PER COMMENTS
A	03/07/19	ISSUED FOR REVIEW



Dewberry Engineers Inc.
600 PARSIPPANY ROAD
SUITE 301
PARSIPPANY, NJ 07054
PHONE: 973.738.9100
FAX: 973.738.8710




DRAWN BY:	JC
REVIEWED BY:	BSH
CHECKED BY:	GHN
PROJECT NUMBER:	50062961
JOB NUMBER:	50108258
SITE ADDRESS:	

845 ETHAN ALLEN
HIGHWAY
RIDGEFIELD, CT 06877

SHEET TITLE

ANTENNA & EQUIPMENT
DETAILS

SHEET NUMBER

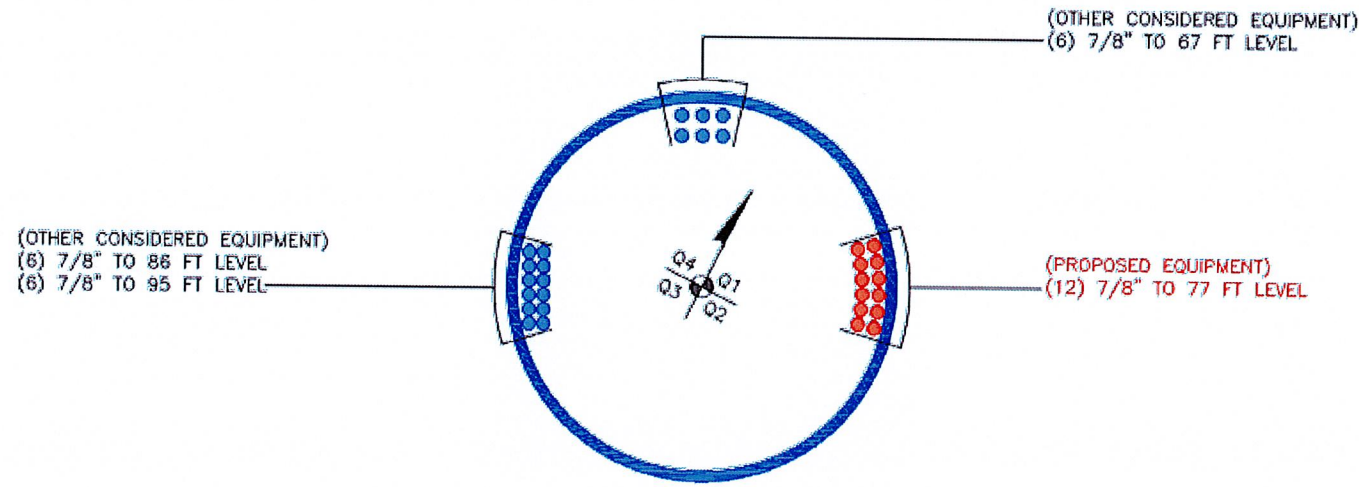

BASE LEVEL DETAIL
SCALE: N.T.S.

1

POWER AND FIBER	
CABLE	ID
#1	GREEN
#2	RED
#3	BROWN
#4	BLUE
#5	GREY
#6	ORANGE
#7	WHITE
#8	PURPLE

2.5MM BAND			
2.5 FREQUENCY	2500 RADIO 1		ID
2500 #1	YELLOW	WHITE	GREEN
2500 #2	YELLOW	WHITE	RED
2500 #3	YELLOW	WHITE	BROWN
2500 #4	YELLOW	WHITE	BLUE
2500 #5	YELLOW	WHITE	GREY
2500 #6	YELLOW	WHITE	ORANGE
2500 #7	YELLOW	WHITE	WHITE
2500 #8	YELLOW	WHITE	PURPLE

FIGURE 1: ANTENNA ORIENTATION



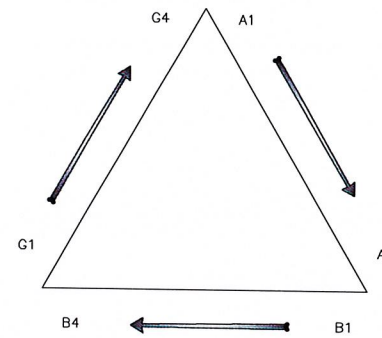


FIGURE 19.2: COLOR CODE

2.5 FREQUENCY	INDICATOR		ID
2500 #1	YELLOW	WHITE	GREEN
2500 #2	YELLOW	WHITE	RED
2500 #3	YELLOW	WHITE	BROWN
2500 #4	YELLOW	WHITE	BLUE
2500 #5	YELLOW	WHITE	GREY
2500 #6	YELLOW	WHITE	ORANGE
2500 #7	YELLOW	WHITE	WHITE
2500 #8	YELLOW	WHITE	PURPLE

FIGURE 19.1: CABLE COLOR CODE

- NOTES:
- ALL CABLES SHALL BE MARKED AT THE TOP AND BOTTOM WITH 2" COLORED TAPE, STENCIL TAG COLORED TAPE, OR COLORED HEAT SHRINK TUBING.
 - COLORED TAPE MAY BE OBTAINED FROM GRAYBAR ELECTRIC. UV STABILIZED TAPE OR HEAT SHRINK ARE PREFERRED.
 - THE FIRST RING SHALL BE CLOSEST TO THE END OF THE CABLE, AND THERE SHALL BE A 1" SPACE BETWEEN EACH RING.
 - THE CABLE COLOR CODE SHALL BE APPLIED IN ACCORDANCE TO TABLE 19-1
 - TABLE 19-1 ONLY SHOWS 3 SECTORS, BUT ADDITIONAL SECTORS ARE EASILY SUPPORTED BY ADDING THE APPROPRIATE NUMBER OF COLORED RINGS TO THE CABLE COLOR CODE.
 - AFTER THE CABLE COLOR CODE IS APPLIED, THE FREQUENCY COLOR CODE, TABLE 19-2, MUST BE APPLIED FOR THE SPECIFIC FREQUENCY BAND IN USE ON A GIVEN LINE.
 - 2" GAP SHALL SEPARATE THE CABLE COLOR CODE FROM THE FREQUENCY COLOR CODE.
 - THE 2" COLOR RINGS FOR THE FREQUENCY CODE SHALL BE PLACED NEXT TO EACH OTHER WITH NO SPACES.
 - WRAP 2" COLORED TAPE A MINIMUM OF 3 TIMES AROUND THE COAX, AND KEEP THE TAPE IN THE SAME AREA AS MUCH AS POSSIBLE. THIS WILL ALLOW REMOVAL OF TAPE THAT FADES OR DISCOLORS DUE TO WEATHER.
 - EXAMPLES OF THE CABLE AND FREQUENCY COLOR CODES ARE SHOWN IN FIGURE 19-1 AND FIGURE 19-2

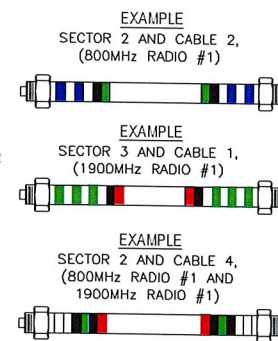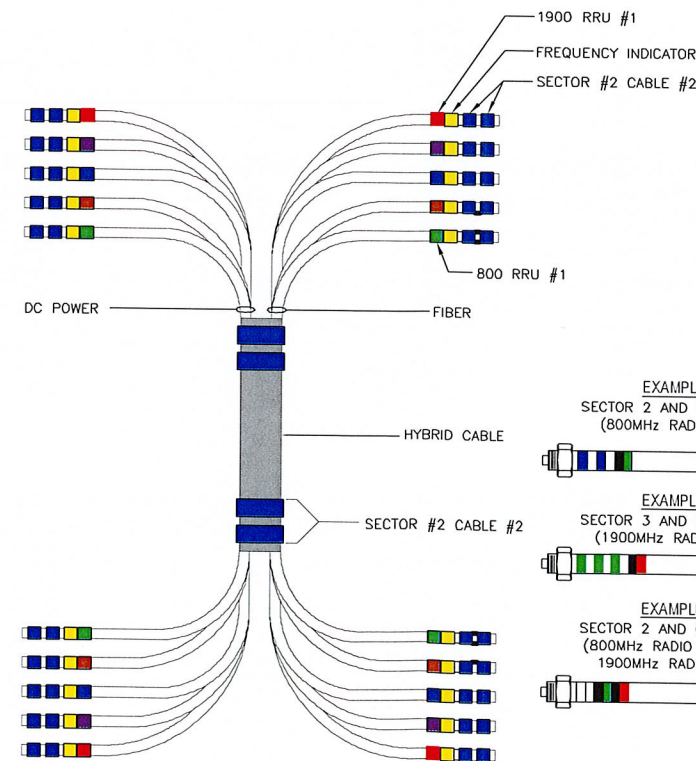

SPRINT CABLE COLOR CODE

SECTOR	CABLE	FIRST RING	SECOND RING	THIRD RING
1 ALPHA	1	GREEN	NO TAPE	NO TAPE
	2	BLUE	NO TAPE	NO TAPE
	3	BROWN	NO TAPE	NO TAPE
	4	WHITE	NO TAPE	NO TAPE
	5	RED	NO TAPE	NO TAPE
	6	GREY	NO TAPE	NO TAPE
	7	PURPLE	NO TAPE	NO TAPE
	8	ORANGE	NO TAPE	NO TAPE
2 BETA	1	GREEN	GREEN	NO TAPE
	2	BLUE	BLUE	NO TAPE
	3	BROWN	BROWN	NO TAPE
	4	WHITE	WHITE	NO TAPE
	5	RED	RED	NO TAPE
	6	GREY	GREY	NO TAPE
	7	PURPLE	PURPLE	NO TAPE
	8	ORANGE	ORANGE	NO TAPE
3 GAMMA	1	GREEN	GREEN	GREEN
	2	BLUE	BLUE	BLUE
	3	BROWN	BROWN	BROWN
	4	WHITE	WHITE	WHITE
	5	RED	RED	RED
	6	GREY	GREY	GREY
	7	PURPLE	PURPLE	PURPLE
	8	ORANGE	ORANGE	ORANGE

COLOR CODE INFORMATION
SCALE: N.T.S.

2



CROWN CASTLE
3 CORPORATE PARK DRIVE,
SUITE 101
CLIFTON PARK, NY 12065


REDDING/RT7
CT23XC384

CONSTRUCTION DRAWINGS

NO.	DATE	DESCRIPTION
1	05/10/19	ISSUED AS FINAL
0	03/27/19	ISSUED AS FINAL
B	03/21/19	REVISED PER COMMENTS
A	03/07/19	ISSUED FOR REVIEW



Dewberry Engineers Inc.
600 PARSIPPANY ROAD
SUITE 301
PARSIIPPANY, NJ 07054
PHONE: 973.739.9400
FAX: 973.739.9710

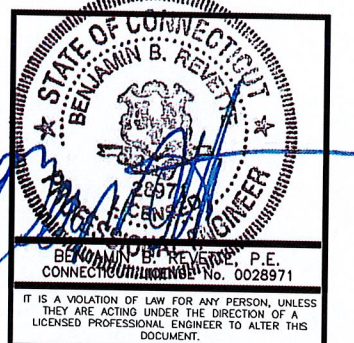

DRAWN BY:	JC
REVIEWED BY:	BSH
CHECKED BY:	GHN
PROJECT NUMBER:	50062961
JOB NUMBER:	50108258
SITE ADDRESS:	


845 ETHAN ALLEN
HIGHWAY
RIDGEFIELD, CT 06877

SHEET TITLE


CABLE ROUTING & COLOR
CODING INFORMATION

SHEET NUMBER


A-5

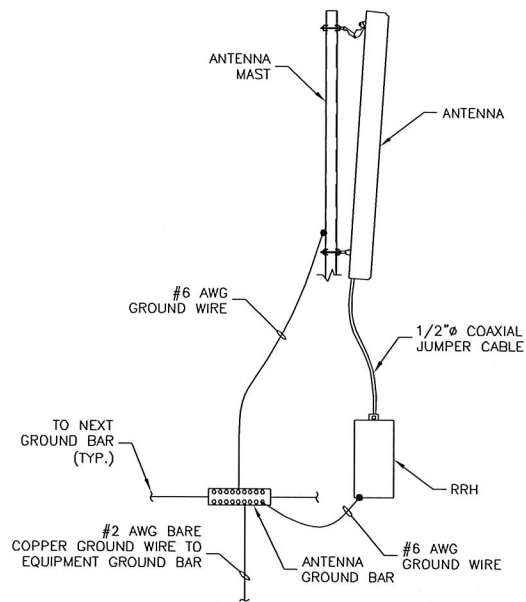

TYPICAL ANTENNA GROUNDING DETAIL
SCALE: N.T.S.

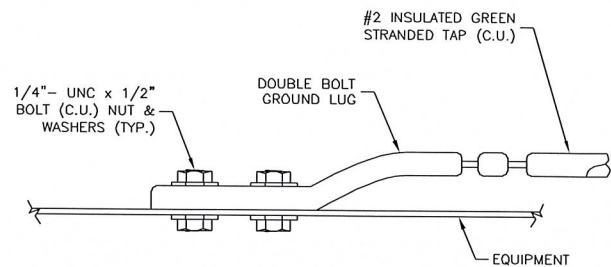


CONNECTION TO EQUIPMENT DETAIL
SCALE: N.T.S.

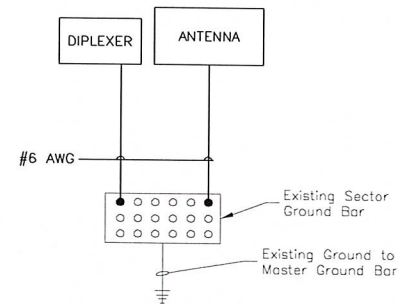


- NOTES:**
1. BOND ANTENNA GROUNDING KIT CABLE TO TOP CIGBE
 2. BOND ANTENNA GROUNDING KIT CABLE TO BOTTOM CIGBE.
 3. TYPICAL FOR FOR ALL SECTORS.

SCHEMATIC GROUNDING DIAGRAM
SCALE: N.T.S.

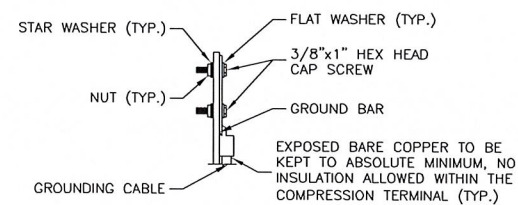

SECTION 'A-A'

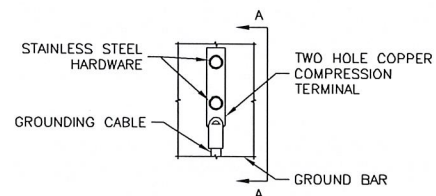


ELEVATION

NOTES:


1. DOUBLING UP OR STACKING OF CONNECTIONS IS NOT PERMITTED.
2. OXIDE INHIBITING COMPOUND TO BE USED AT ALL LOCATIONS.

TYPICAL GROUND BAR MECHANICAL CONNECTION DETAIL
SCALE: N.T.S.

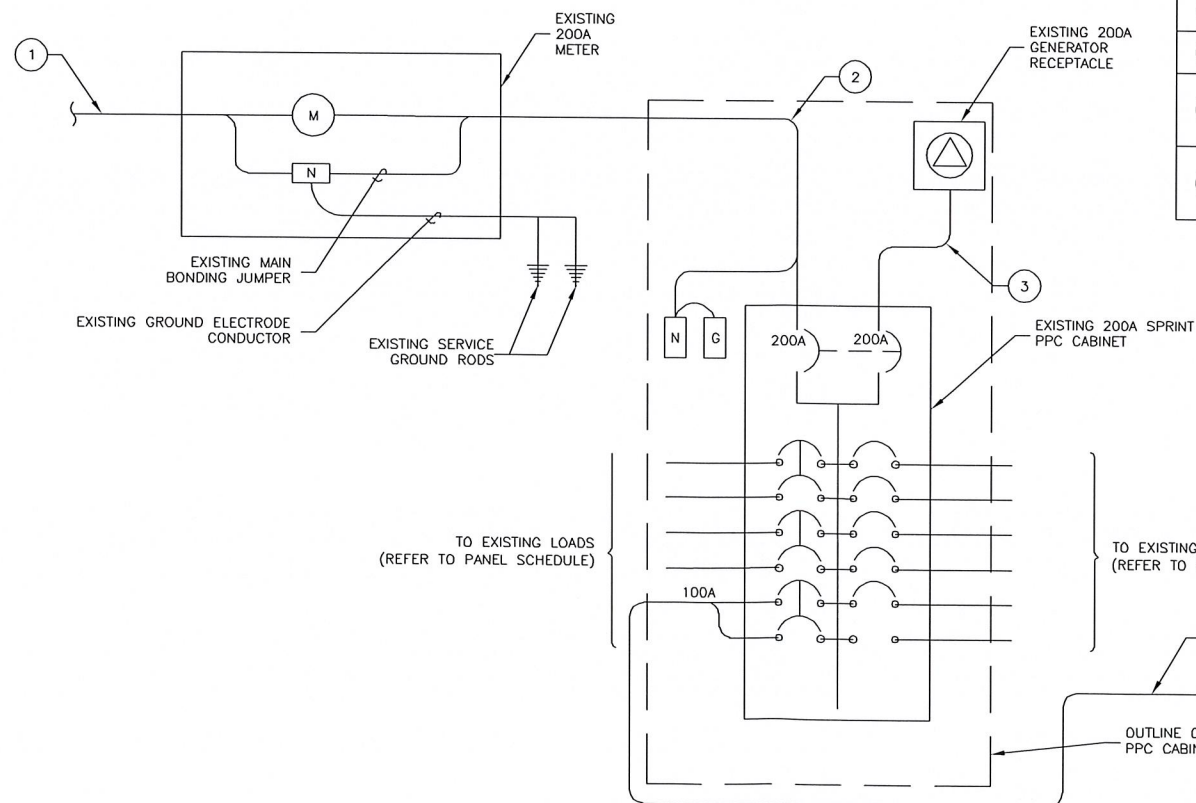

ONE-LINE DIAGRAM
SCALE: N.T.S.

CIRCUIT SCHEDULE			
NO	FROM	TO	CONFIGURATION
①	UTILITY SOURCE	METER	EXISTING
②	METER	SERVICE DISCONNECT, TRANSFER & LOAD CENTER	EXISTING
③	SERVICE DISCONNECT, TRANSFER & LOAD CENTER	GENERATOR RECEPTACLE	EXISTING
④	SERVICE DISCONNECT, TRANSFER & LOAD CENTER	EXISTING SPRINT MMBTS CABINET	EXISTING
⑤	EXISTING SPRINT MMBTS CABINET	EXISTING SPRINT BATTERY CABINET	EXISTING

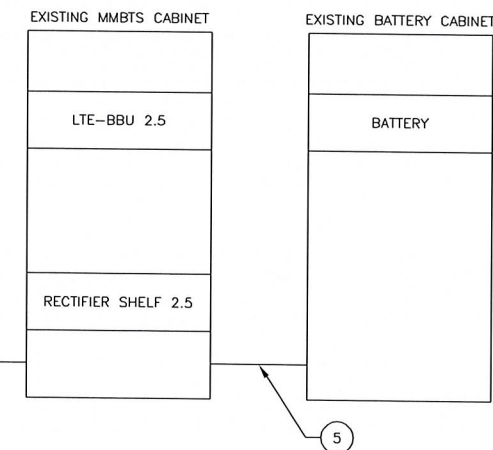

CROWN CASTLE
3 CORPORATE PARK DRIVE,
SUITE 101
CLIFTON PARK, NY 12065


**REDDING/RT7
CT23XC384**

CONSTRUCTION DRAWINGS

1	05/10/19	ISSUED AS FINAL
0	03/27/19	ISSUED AS FINAL
B	03/21/19	REVISED PER COMMENTS
A	03/07/19	ISSUED FOR REVIEW



Dewberry Engineers Inc.
600 PARSIPPANY ROAD
SUITE 301
PARSIPPANY, NJ 07054
PHONE: 973.739.9400
FAX: 973.739.9710

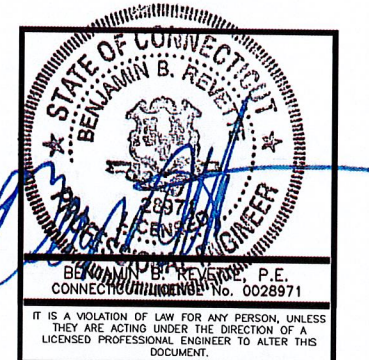

DRAWN BY:	JC
REVIEWED BY:	BSH
CHECKED BY:	GHN
PROJECT NUMBER:	50062961
JOB NUMBER:	50108258
SITE ADDRESS:	

845 ETHAN ALLEN
HIGHWAY
RIDGEFIELD, CT 06877

SHEET TITLE
**ELECTRICAL ONE-LINE
DIAGRAM &
GROUNDING DETAILS**
SHEET NUMBER

ELECTRICAL INSTALLATION NOTES:

PART 1 GENERAL:

1. WORK INCLUDED
- A. SECONDARY ELECTRICAL SERVICE INCLUDING UNDERGROUND CONDUIT BANK FROM POWER COMPANY TRANSFORMER AND SECONDARY SERVICE ENTRANCE SERVICE;
- B. OUTDOOR SECONDARY DISTRIBUTION SYSTEM INCLUDING EXISTING EQUIPMENT TO BE RELOCATED AS SHOWN ON THE DRAWINGS AND PROPOSED RACEWAYS, CABLES, WIRING, JUNCTION BOXES, PULL BOXES AND OTHER COMPONENTS REQUIRED FOR COMPLETE INSTALLATION OF ELECTRICAL DISTRIBUTION SYSTEM.
2. PRIOR TO THE SUBMISSION OF BIDS, THE BIDDING ELECTRICAL SUBCONTRACTOR SHALL VISIT THE CELL SITE TO FAMILIARIZE WITH THE EXISTING CONDITIONS AND TO CONFIRM THAT THE WORK CAN BE ACCOMPLISHED AS SHOWN ON THE CONSTRUCTION DRAWINGS. ANY DISCREPANCY FOUND SHALL BE BROUGHT TO THE ATTENTION OF CONTRACTOR.
3. ALL ELECTRICAL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS, AND LATEST EDITION ALL APPLICABLE NATIONAL AND LOCAL CODES.
4. THE POWER COMPANY SERVING THIS PROJECT IS ORLANDO UTILITIES COMMISSION. SERVICE WILL BE OBTAINED 200 AMPERES AT 240/120 VOLTS, SINGLE PHASE, 3 WIRE. COORDINATE WITH POWER COMPANY TRENCHING REQUIREMENTS, INSTALLATION OF THE SECONDARY POWER CONDUITS AND CABLES, AND METERING.
5. THE DRAWINGS, WHICH CONSTITUTE AN INTEGRAL PART OF THIS CONTRACT, SHALL SERVE AS THE WORKING DRAWINGS. THEY INDICATE THE GENERAL LAYOUT OF THE EXISTING FACILITIES AND THE COMPLETE NEW ELECTRICAL SYSTEM OR SYSTEMS, ARRANGEMENT OF FEEDERS, CIRCUITS, OUTLETS, SWITCHES, CONTROLS, PANELBOARDS, SERVICE EQUIPMENT, AND OTHER WORK.
6. DISCONNECT POWER AND CONTROL AND MAKE SAFE FOR RELOCATION OR DEMOLITION FROM EQUIPMENT INDICATED FOR RELOCATION OR DEMOLITION. PROVIDE RELOCATION OR DEMOLITION IN ACCORDANCE WITH CONTRACT DRAWINGS. REMOVE ALL DEBRIS, DEMOLISHED WIRING, CONDUIT AND EQUIPMENT, UNLESS THESE SCHEDULED TO BE RETURN TO OWNER.
7. INSTALLATION OF ELECTRICAL EQUIPMENT, ACCESSORIES AND COMPONENTS SHALL BE IN ACCORDANCE WITH SEISMIC REQUIREMENTS IDENTIFIED IN THE LATEST EDITION OF THE APPLICABLE BUILDING CODES.
8. SUBMIT SHOP DRAWING FOR EQUIPMENT SPECIFIED IN THE PROJECT: SWITCHING DEVICES, WIRING DEVICES AND COVER PLATES, WIRING AND CABLES, CONDUITS, BOXES AND FITTINGS, SAFETY SWITCHES. THE SHOP DRAWINGS SHALL INCLUDE CATALOG NUMBERS, CUTS, DIAGRAMS, DETAILED DIMENSIONED SHOP DRAWINGS OF EQUIPMENT, BROCHURES OF LIGHTING FIXTURES, WIRING DIAGRAMS AS REQUIRED, DRAWINGS, SAMPLES AS REQUESTED, AND SUCH OTHER PERTINENT DESCRIPTIVE RATINGS AND DATA AS MAY BE REQUIRED BY THE ENGINEER.
9. THE ELECTRICAL CONTRACTOR BEFORE STARTING WORK SHALL CONFER WITH ALL OTHER TRADES INTERESTED IN THE LOCATION OF PIPES, PITS, TRENCHES OR ANY OTHER APPARATUS TO BE INSTALLED BY THEM AND SHALL SELECT HIS LOCATION SO AS NOT TO INTERFERE WITH THE WORK AND RIGHTS OF THE OTHER TRADES. ALL DIFFERENCES OR CONFLICTING CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER FOR ADJUSTMENT BEFORE COMMENCING WORK, AND ANY SUCH WORK OR MATERIALS PLACED IN POSITION IN VIOLATION OF THIS CLAUSE SHALL BE READJUSTED AT THE EXPENSE OF THE ELECTRICAL CONTRACTOR.
10. THE CONTRACTOR SHALL FURNISH, INSTALL, MAINTAIN AND REMOVE, AFTER CONSTRUCTION IS COMPLETED, A TEMPORARY POWER AND LIGHTING SYSTEM AS REQUIRED FOR CONSTRUCTION PURPOSES. THE SYSTEM SHALL CONSIST OF A POWER SERVICE, DISTRIBUTION SYSTEM, PANELBOARDS, GROUNDING, GROUND FAULT PROTECTIVE DEVICES, BRANCH CIRCUITS AND RECEPTACLE OUTLETS AS REQUIRED.
11. ELECTRICAL ENCLOSURE SHALL BE NEMA 3R FOR OUTDOOR LOCATION AND NEMA 4 FOR WET LOCATION WITH OPEN WATER.
12. THE ELECTRICAL SYSTEM OR SYSTEMS, TOGETHER WITH THE COMPONENT UNITS AS INCLUDED IN THIS SECTION OF THE SPECIFICATIONS, SHALL BE WARRANTED FOR A PERIOD OF ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE THEREOF AGAINST DEFECTIVE MATERIALS AND WORKMANSHIP.

PART 2 PRODUCT:

1. ALL EQUIPMENT AND MATERIALS EXCEPT RELOCATED FINISHED BY THE ELECTRICAL CONTRACTOR SHALL BE NEW AND FIRST GRADE, AND AS APPROVED BY THE UNDERWRITERS' LABORATORIES, INC., AND/OR BY OTHER STANDARDS MENTIONED IN THESE SPECIFICATIONS. MATERIALS TO BE FURNISHED UNDER THIS SPECIFICATION SHALL BE THE STANDARD PRODUCTS OF MANUFACTURERS REGULARLY ENGAGED IN THE PRODUCTION OF SUCH EQUIPMENT AND SHALL BE OF THE LATEST STANDARD DESIGN. EQUIPMENT AND MATERIALS SHALL BE OF THE TYPE AND QUALITY LISTED BELOW.
2. PVC CONDUIT SHALL BE RIGID POLYVINYL CHLORIDE SCHEDULE 40. RIGID PVC CONDUIT AND FITTINGS TRADE SIZE SHALL BE AS SHOWN ON THE DRAWINGS. CONDUITS SHALL BE INSTALLED DIRECT BURIAL AND COMPLY WITH NEMA TC-8 AND ASTM F512. ACCEPTABLE MANUFACTURER: CARLON CORP., CERTAINED CORP., CONUX PIPE SYSTEMS, INC., OR EQUAL. CONNECTORS, COUPLINGS, FITTINGS AND ANCILLARY MATERIALS SHALL BE SUPPLIED BY THE CONDUIT MANUFACTURER.
3. GALVANIZED RIGID METAL CONDUIT (GRS), COUPLINGS, FACTORY ELBOWS AND FITTINGS SHALL BE HEAVY WALL STEEL TUBING WITH A HOT-DIPPED GALVANIZED FINISH INSIDE AND OUT AFTER THREADING AND SHALL COMPLY WITH ANSI C 80.1 AND UL/6. ACCEPTABLE MANUFACTURER: ALIEN TUBE & CONDUIT CORP.; LTV STEEL TUBULAR PRODUCTS CORP. TRIANGLE PWC. CORP. OR EQUAL.
4. PULL AND JUNCTION BOXES FOR DRY LOCATION SHALL BE ZINC-GALVANIZED, EXTRA DEPTH, PRESSED STEEL WITH KNOCKOUTS AND OF SIZE AND TYPE SUITABLE FOR THE INTENDED APPLICATION. NEMA 3R TERMINAL BOXES, JUNCTION BOXES AND PULL BOXES SHALL BE SHEET TYPE 316 STAINLESS STEEL. BOXES SHALL BE CONTINUOUSLY WELDED SEAM AND MOUNTING FEET. WELDS SHALL BE GROUND SMOOTH BOXES SHALL BE FLANGED AND SHALL NOT HAVE HOLES AND KNOCKOUTS. ACCEPTABLE MANUFACTURERS: HOFFMAN STAHLIN - DIVISION OF ROBROY IND. ENGLISH ELECTRIC, OR EQUAL.
5. WIRES AND CABLES SHALL BE OF ANNEALED, 98 PERCENT CONDUCTIVITY, SOFT DRAWN COPPER. ALL CONDUCTORS SHALL BE STRANDED, EXCEPT THAT CONTROL WIRING MAY BE SOLID. POWER WIRE SMALLER THAN NO. 12 AWG SHALL NOT BE USED. CONTROL AND SIGNAL WIRE SHALL BE NO.14 AWG NEC TYPE THHN/THWN. STRANDED WIRE SHALL BE NEC TYPE THHN/THWN AS MANUFACTURED BY THE OKONITE CO.; CAROL CABLE CO. INC.; PIRELLI CABLE CORP. OR EQUAL.
6. RECEPTACLES INSTALLED OUTDOOR SHALL BE WEATHERPROOF WITH GFI PROTECTION. RECEPTACLES SHALL BE MADE BY THE FOLLOWING MANUFACTURER: HARVEY HUBBELL, INC.; PASS & SEYMOUR, INC. OR EQUAL. RECEPTACLES PLATES SHALL BE THE SAME MANUFACTURER AND SUITABLE FOR NEMA ENVIRONMENT.
7. DISCONNECT SWITCHES SHALL BE HEAVY DUTY, QUICK MAKE, QUICK BREAK, VISIBLE BLADES, 600 VOLT, 3 POLE WITH FULL COVER INTERLOCK, INTERLOCK DEFEAT AND FLANGE MOUNTED OPERATING HANDLE. FUSED DISCONNECT SHALL BE EQUIPPED WITH FUSE SIZE AND TYPE AS SHOWN ON THE DRAWING. SWITCHES ALL CURRENT CARRYING PARTS SHALL BE COPPER. SWITCHES SHALL BE AS MANUFACTURED BY THE SQUARE D CO.; GENERAL ELECTRIC; CUTLER-HAMMER, OR EQUAL.
8. MOLDED CASE CIRCUIT BREAKER: 600 VOLT, 2 POLE FULLY RATED, INSULATED CASE, WITH INTEGRAL FULLY ADJUSTABLE SOLID STATE TRIP DEVICE. TRIP DEVICE SHALL BE TEMPERATURE INSENSITIVE AND HAVE THE FOLLOWING CHARACTERISTICS AND FUNCTIONS: INDEPENDENTLY ADJUSTABLE LONG TIME PICK_UP AND DELAY; INDEPENDENTLY ADJUSTABLE SHORT TIME PICK_UP AND DELAY WITH 1/2 IN AND OUT SWITCH, ADJUSTABLE INSTANTANEOUS; INDEPENDENTLY ADJUSTABLE GROUND FAULT PICK_UP AND DELAY; TRIP MODE TARGETS FOR OVER LOAD, SHORT CIRCUIT AND GROUND FAULT; LONG TIME PICK_UP LIGHT. CIRCUIT BREAKER SHALL BE SHALL HAVE A SHORT CIRCUIT RATING OF 42,000 RMS SYMMETRICAL AT RATED VOLTAGE. CIRCUIT BREAKER SHALL BE AS MANUFACTURED BY SQUARE D CO.; GENERAL ELECTRIC CO.; CUTLER- HAMMER, OR EQUAL.

PART 3 INSTALLATION:

12. ALL WIRE SHALL BE COLOR CODED OR CODED USING ELECTRICAL TAPE IN SITES WHERE COLORED INSULATION IS NOT AVAILABLE. WHERE TAPE IS USED AS THE IDENTIFICATION SYSTEM, IT SHALL BE APPLIED IN ALL JUNCTION BOXES, ND OTHER ACCESSIBLE INTERMEDIATE LOCATIONS AS WELL AS AT EACH TERMINATION. EACH END OF EVERY POWER, POWER PHASE CONDUCTOR, GROUNDING, AND T1 CONDUCTOR AND CABLE SHALL BE LABELED WITH COLOR-CODED INSULATION OR ELECTRICAL TAPE (3M BRAND, 1/2 INCH PLASTIC ELECTRICAL TAPE WITH UV PROTECTION, OR EQUAL). THE IDENTIFICATION METHOD SHALL CONFORM WITH NEC & OSHA, AND MATCH EXISTING INSTALLATION REQUIREMENTS.
13. GALVANIZED RIGID STEEL CONDUIT (RGS) SHALL BE USED FOR OUTDOOR LOCATIONS ABOVE GRADE.
14. RIGID NONMETALLIC CONDUIT (I.E., RIGID PVC SCHEDULE 40 OR RIGID PVC SCHEDULE 80) SHALL BE USED UNDERGROUND; DIRECT BURIED, IN AREAS OF OCCASIONAL LIGHT VEHICLE TRAFFIC OR ENCASED IN REINFORCED CONCRETE IN AREAS OF HEAVY VEHICLE TRAFFIC.
15. LIQUID-TIGHT FLEXIBLE METALLIC CONDUIT (LIQUID-TITE FLEX) SHALL BE USED INDOORS AND OUTDOORS, WHERE VIBRATION OCCURS OR FLEXIBILITY IS NEEDED.
16. IN DAMP, WET OR WET/CORROSIVE AREAS INSTALL SURFACE MOUNTED DEVICES.
17. FIELD MOUNTED DISCONNECTS, PUSHBUTTON CONTROL STATIONS, ALARM PANELS, ENCLOSED STARTERS AND CIRCUIT BREAKERS, AUTOMATIC TRANSFER SWITCHES, POWER DISTRIBUTION PANELS, WIREWAYS, CONTACTORS, TERMINAL BOXES, JUNCTION AND PULL BOXES SHALL BE MOUNTED ON GALVANIZED OR STAINLESS STEEL STANDS UNLESS OTHERWISE NOTED OR ALLOWED BY ENGINEER.
18. ALL ELECTRICAL COMPONENTS SHALL BE CLEARLY LABELED WITH ENGRAVED LAMACOID PLASTIC LABELS. ALL EQUIPMENT SHALL BE LABELED WITH THEIR VOLTAGE RATING, PHASE CONFIGURATION, WIRE CONFIGURATION, POWER OR AMPACITY RATING, AND BRANCH CIRCUIT ID NUMBERS (I.E., PANELBOARDS AND CIRCUIT ID'S).
19. PANELBOARDS (ID NUMBERS) AND INTERNAL CIRCUIT BREAKERS (CIRCUIT ID NUMBERS) SHALL BE CLEARLY LABELED WITH ENGRAVED LAMACOID PLASTIC LABEL.
20. SUPPLEMENTAL GROUNDING CONDUCTOR LOCATED OUTDOORS, OR BELOW GRADE, SHALL BE SINGLE CONDUCTOR #2 AWG SOLID TINNED COPPER CABLE, UNLESS OTHERWISE SPECIFIED.
21. ALL POWER AND POWER GROUNDING CONNECTIONS SHALL BE CRIMP-STYLE, COMPRESSION WIRE LUGS AND WIRENUTS BY THOMAS AND BETTS (OR EQUAL). LUGS AND WIRENUTS SHALL BE RATED FOR OPERATION AT NO LESS THAN 75°C (90°C IF AVAILABLE).
22. RACEWAY AND CABLE TRAY SHALL BE LISTED OR LABELED FOR ELECTRICAL USE IN ACCORDANCE WITH NEMA, UL, ANSI/IEEE, AND NEC.
23. NEW RACEWAY OR CABLE TRAY WILL MATCH THE EXISTING INSTALLATION WHERE POSSIBLE.
24. CABINETS, BOXES, AND WIREWAYS SHALL BE LISTED OR LABELED FOR ELECTRICAL USE IN ACCORDANCE WITH NEMA, UL, ANSI/IEEE, AND NEC.
25. THE CONTRACTOR SHALL NOTIFY AND OBTAIN NECESSARY AUTHORIZATION FROM THE CONTRACTOR BEFORE COMMENCING WORK ON THE AC POWER DISTRIBUTION PANELS.
26. THE CONTRACTOR SHALL PROVIDE NECESSARY TAGGING ON THE BREAKERS, CABLES AND DISTRIBUTION PANELS IN ACCORDANCE WITH THE APPLICABLE CODES AND STANDARDS TO SAFEGUARD AGAINST LIFE AND PROPERTY.
26. ALL TIE WRAPS SHALL BE CUT FLUSH WITH APPROVED CUTTING TOOL TO REMOVE SHARP EDGES.

SECTION 26 200 - ELECTRICAL MATERIALS AND EQUIPMENT

CONDUIT:

- A. RIGID GALVANIZED STEEL (RGS) CONDUIT SHALL BE USED FOR EXTERIOR LOCATIONS ABOVE GROUND AND IN UNFINISHED INTERIOR LOCATIONS AND FOR ENCASED RUNS IN CONCRETE. RIGID CONDUIT AND FITTINGS SHALL BE STEEL, COATED WITH ZINC EXTERIOR AND INTERIOR BY THE HOT DIP GALVANIZING PROCESS. CONDUIT SHALL BE PRODUCED TO ANSI SPECIFICATIONS C80.1, FEDERAL SPECIFICATION WW-C-581 AND SHALL BE LISTED WITH THE UNDERWRITERS' LABORATORIES. FITTINGS SHALL BE THREADED - SET SCREW OR COMPRESSION FITTINGS WILL NOT BE ACCEPTABLE. RGS CONDUITS SHALL BE MANUFACTURED BY ALLIED, REPUBLIC OR WHEATLAND.
- B. UNDERGROUND CONDUIT IN CONCRETE SHALL BE POLYVINYLCHLORIDE (PVC) SUITABLE FOR DIRECT BURIAL AS APPLICABLE. JOINTS SHALL BE BELLED, AND FLUSH SOLVENT WELDED IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS. CONDUIT SHALL BE CARLON ELECTRICAL PRODUCTS OR APPROVED EQUAL.
- C. TRANSITIONS BETWEEN PVC AND RIGID (RGS) SHALL BE MADE WITH PVC COATED METALLIC LONG SWEEP RADIUS ELBOWS.
- D. EMT OR RIGID GALVANIZED STEEL CONDUIT MAY BE USED IN FINISHED SPACES CONCEALED IN WALLS AND CEILINGS. EMT SHALL BE MILD STEEL, ELECTRICALLY WELDED, ELECTRO-GALVANIZED OR HOT-DIPPED GALVANIZED AND PRODUCED TO ANSI SPECIFICATION C80.3, FEDERAL SPECIFICATION WW-C-563, AND SHALL BE UL LISTED. EMT SHALL BE MANUFACTURED BY ALLIED, REPUBLIC OR WHEATLAND, OR APPROVED EQUAL. FITTINGS SHALL BE METALLIC COMPRESSION. SET SCREW CONNECTIONS SHALL NOT BE ACCEPTABLE.
- E. LIQUID TIGHT FLEXIBLE METALLIC CONDUIT SHALL BE USED FOR FINAL CONNECTION TO EQUIPMENT. FITTINGS SHALL BE METALLIC GLAND TYPE COMPRESSION FITTINGS, MAINTAINING THE INTEGRITY OF CONDUIT SYSTEM. SET SCREW CONNECTIONS SHALL NOT BE ACCEPTABLE. MAXIMUM LENGTH OF FLEXIBLE CONDUIT SHALL NOT EXCEED 6- FEET. LFMC SHALL BE PROTECTED AND SUPPORTED AS REQUIRE BY NEC. MANUFACTURERS OF FLEXIBLE CONDUITS SHALL BE CAROL, ANACONDA METAL HOSE OR UNIVERSAL METAL HOSE, OR APPROVED EQUAL.
- F. MINIMUM SIZE CONDUIT SHALL BE 3/4 INCH (21MM).

HUBS AND BOXES:

- A. AT ENTRANCES TO CABINETS OR OTHER EQUIPMENT NOT HAVING INTEGRAL THREADED HUBS PROVIDE METALLIC THREADED HUBS OF THE SIZE AND CONFIGURATION REQUIRED. HUB SHALL INCLUDE LOCKNUT AND NEOPRENE O-RING SEAL. PROVIDE IMPACT RESISTANT 105 DEGREE C PLASTIC BUSHINGS TO PROTECT CABLE INSULATION.
- B. CABLE TERMINATION FITTINGS FOR CONDUIT
 1. CABLE TERMINATORS FOR RGS CONDUITS SHALL BE TYPE CRC BY O-Z/GEDNEY OR EQUAL.
 2. CABLE TERMINATORS FOR LFMC SHALL BE ETCO - CL2075; OR MADE FOR THE PURPOSE PRODUCTS BY ROXTEC.
- C. EXTERIOR PULL BOXES AND PULL BOXES IN INTERIOR INDUSTRIAL AREAS SHALL BE PLATED CAST ALLOY, HEAVY DUTY, WEATHERPROOF, DUST PROOF, WITH GASKET, PLATED IRON ALLOY COVER AND STAINLESS STEEL COVER SCREWS, CROUSE-HINDS WAB SERIES OR EQUAL.
- D. CONDUIT OUTLET BODIES SHALL BE PLATED CAST ALLOY WITH SIMILAR GASKETED COVERS. OUTLET BODIES SHALL BE OF THE CONFIGURATION AND SIZE SUITABLE FOR THE APPLICATION. PROVIDE CROUSE-HINDS FORM 8 OR EQUAL.
- E. MANUFACTURER FOR BOXES AND COVERS SHALL BE HOFFMAN, SQUARE "D", CROUSE-HINDS, COOPER, ADALET, APPLETON, O-Z GEDNEY, RACO, OR APPROVED EQUAL.

SUPPLEMENTAL GROUNDING SYSTEM

- A. FURNISH AND INSTALL A SUPPLEMENTAL GROUNDING SYSTEM AS INDICATED ON THE DRAWINGS. SUPPORT SYSTEM WITH NON-MAGNETIC STAINLESS STEEL CLIPS WITH RUBBER GROMMETS. GROUNDING CONNECTORS SHALL BE TINNED COPPER WIRE, SIZES AS INDICATED ON THE DRAWINGS. PROVIDE STRANDED OR SOLID BARE OR INSULATED CONDUCTORS AS INDICATED.
- B. SUPPLEMENTAL GROUNDING SYSTEM: ALL CONNECTIONS TO BE MADE WITH CAD WELDS, EXCEPT AT EQUIPMENT USE LUGS OR OTHER AVAILABLE GROUNDING MEANS AS REQUIRED BY MANUFACTURER; AT GROUND BARS USE TWO HOLE SPADES WITH NO OX.
- C. STOLEN GROUND-BARS: IN THE EVENT OF STOLEN GROUND BARS, CONTACT SPRINT CM FOR REPLACEMENT INSTRUCTION USING THREADED ROD KITS.

EXISTING STRUCTURE:

- A. EXISTING EXPOSED WIRING AND ALL EXPOSED OUTLETS, RECEPTACLES, SWITCHES, DEVICES, BOXES, AND OTHER EQUIPMENT THAT ARE NOT TO BE UTILIZED IN THE COMPLETED PROJECT SHALL BE REMOVED OR DE-ENERGIZED AND CAPPED IN THE WALL, CEILING, OR FLOOR SO THAT THEY ARE CONCEALED AND SAFE. WALL, CEILING, OR FLOOR SHALL BE PATCHED TO MATCH THE ADJACENT CONSTRUCTION.

CONDUIT AND CONDUCTOR INSTALLATION:

- A. CONDUITS SHALL BE FASTENED SECURELY IN PLACE WITH APPROVED NON-PERFORATED STRAPS AND HANGERS. EXPLOSIVE DEVICES FOR ATTACHING HANGERS TO STRUCTURE WILL NOT BE PERMITTED. CLOSELY FOLLOW THE LINES OF THE STRUCTURE, MAINTAIN CLOSE PROXIMITY TO THE STRUCTURE AND KEEP CONDUITS IN TIGHT ENVELOPES. CHANGES IN DIRECTION TO ROUTE AROUND OBSTACLES SHALL BE MADE WITH CONDUIT OUTLET BODIES. CONDUIT SHALL BE INSTALLED IN A NEAT AND WORKMANLIKE MANNER, PARALLEL AND PERPENDICULAR TO STRUCTURE WALL AND CEILING LINES. ALL CONDUIT SHALL BE FISHED TO CLEAR OBSTRUCTIONS. ENDS OF CONDUITS SHALL BE TEMPORARILY CAPPED TO PREVENT CONCRETE, PLASTER OR DIRT FROM ENTERING. CONDUITS SHALL BE RIGIDLY CLAMPED TO BOXES BY GALVANIZED MALLEABLE IRON BUSHING ON INSIDE AND GALVANIZED MALLEABLE IRON LOCKNUT ON OUTSIDE AND INSIDE.
- B. CONDUCTORS SHALL BE PULLED IN ACCORDANCE WITH ACCEPTED GOOD PRACTICE.



CROWN CASTLE
3 CORPORATE PARK DRIVE,
SUITE 101
CLIFTON PARK, NY 12065

**REDDING/RT7
CT23XC384**

CONSTRUCTION DRAWINGS		
1	05/10/19	ISSUED AS FINAL
0	03/27/19	ISSUED AS FINAL
B	03/21/19	REVISED PER COMMENTS
A	03/07/19	ISSUED FOR REVIEW

Dewberry[®]
Dewberry Engineers Inc.
600 PARSIPPANY ROAD
SUITE 301
PARSIPPANY, NJ 07054
PHONE: 973.739.9400
FAX: 973.739.9710

BENJAMIN B. REVETTE, P.E.
CONNECTICUT LICENSE NO. 0028971
IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER TO ALTER THIS DOCUMENT.

DRAWN BY: JC

REVIEWED BY: BSH

CHECKED BY: GHN

PROJECT NUMBER: 50062961

JOB NUMBER: 50108258

SITE ADDRESS:

845 ETHAN ALLEN
HIGHWAY
RIDGEFIELD, CT 06877

SHEET TITLE

**ELECTRICAL &
GROUNDING NOTES**

SHEET NUMBER