

March 31, 2015

Members of the Siting Council Connecticut Siting Council Ten Franklin Square New Britain, CT 06051

RE:

Notice of Exempt Modification

225 Grist Mill Road, Simsbury, CT 06070

N 41° 52′ 0.15″ W 72° 48′ 56.78″

T-Mobile Site #: CTHA531A L700

Members of the Siting Council:

On behalf of T-Mobile, SBA Communications is submitting an exempt modification application to the Connecticut Siting council for modification of existing equipment at a tower facility located at 225 Grist Mill Road, Simsbury, CT 06070.

The 225 Grist Mill Road, Simsbury, CT facility consists of a 150' Monopole Tower owned and operated by SBA Towers II, LLC. In order to accommodate technological changes and enhance system performance in the State of Connecticut, T-Mobile plans to modify the equipment configurations at many of its existing cell sites. Please accept this letter and attachments as notification, pursuant to R.C.S.A. Section 16-50j-73, of construction which constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2). In compliance with R.C.S.A. Section 16-50j-73, a copy of this letter and attachments is being sent to the chief elected official of the municipality in which the affected cell site is located.

As part of T-Mobile's L700 project, T-Mobile desires to upgrade their equipment to meet the new standards of 4G technology. The new equipment will allow customers to download files and browse the internet at a high rate of speed while also allowing their phones to be compatible with the latest 4G technology.

Attached is a summary of the planned modifications, including power density calculations reflecting the change in T-Mobile's operations at the site along with the required fee of \$625.

The changes to the facility do not constitute modifications as defined in Connecticut General Statutes ("C.G.S.") Section 16-50i(d) because the general physical characteristics of the facility will not be



significantly changed or altered. Rather, the planned changes to the facility fall squarely within those activities explicitly provided for in R.C.S.A. Section 16-50j-72(b)(2).

- 1. The overall height of the structure will be unaffected.
- 2. The proposed changes will not extend the site boundaries. There will be no effect on the site compound other than the new equipment cabinets.
- 3. The proposed changes will not increase the noise level at the existing facility by six decibels or more.
- 4. The changes in radio frequency power density will not increase the calculated "worst case" power density for the combined operations at the site to a level at or above the applicable standard for uncontrolled environments as calculated for a mixed frequency site.

For the foregoing reasons, SBA Communications on behalf of T-Mobile, respectfully submits that he proposed changes at the referenced site constitute exempt modifications under R.C.S.A. Section 16-50j-72(b)(2).

Please feel free to call me at 508.251.0720 x 3804 with any questions you may have concerning this matter.

Thank you,

Kri Pelletier

SBA Communications Corporation 33 Boston Post Road West Suite 320 Marlborough, MA 01752

508-251-0720 x 3804 + T

508-251-1755 + F

203-446-7700 + C

kpelletier@sbasite.com



T-Mobile Equipment Modification

225 Grist Mill Road, Simsbury, CT 06070 Site number CTHA531A_L700

Tower Owner:

SBA Towers II, LLC

Equipment Configuration:

Monopole

Current and/or approved:

- (3) RFS APX16DWV-16DWVS-C
- (3) RFS ATM1412D-1A20
- (3) Ericsson KRY 144-1
- (12) 7/8" feed lines

Planned Modifications:

- (3) RFS APX16DWV-16DWVS-C
- (3) Commscope LNX-6515DS
- (3) RFS ATM1412D-1A20
- (3) Ericsson KRY 144-1
- (3) Kathrein 782 11056
- (18) 7/8" feed lines

Structural Information:

The attached structural analysis demonstrates that the tower and foundation will have adequate structural capacity to accommodate the proposed modifications.

Power Density:

The anticipated Maximum Composite contributions from the T-Mobile facility are 8.35% of the allowable FCC established general public limit. The anticipated composite MPE value for this site assuming all carriers present is 58.62% of the allowable FCC established general public limit sampled at the ground level.

Site Composite	
Carrier	MPE%
T-Mobile	8.35
AT&T	18.51 %
Verizon Wireless	26.96 %
Nextel	4.63 %
Sprint	0.17 %
New England Site Mngmt	No Values Listed
Town of Simsbury	No Values Listed
Site Total MPE %:	58.62 %



March 31, 2015

Lisa L. Heavner, First Selectman Town of Simsbury 933 Hopmeadow Street Simsbury, CT 06070

RE: Telecommunications Facility @ 225 Grist Mill Road, Simsbury, CT 06070

Dear Ms. Heavner,

In order to accommodate technological changes and enhance system performance in the State of Connecticut, T-Mobile will be changing its equipment configuration at certain cell sites.

As required by Regulations of Connecticut State Agencies (R.C.S.A.) Section 16-50j-73, the Connecticut Siting Council has been notified of the changes and will review T-Mobile's proposal. Please accept this letter as notification under Section 16-50j-73 of construction which constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2).

The accompanying letter to the Siting Council fully describes T-Mobile's proposal for the above referenced cell site. However, if you have any questions or require any further information on our plans or the Siting Council's procedures, please call me at 508.251.0720 x 3804.

Thank you,

Kri Pelletier

SBA Communications Company

33 Boston Post Road West Suite 320

Marlborough, MA 01752

508-251-0720 x 3804 + T

508-251-1755 + F

203-446-7700 + C

kpelletier@sbasite.com



March 31, 2015

Ensign-Bickford Realty Corporation P.O. Box 30666 Hartford CT 06150

RE: Telecommunications Facility @ 225 Grist Mill Road, Simsbury, CT 06070

To Whom It May Concern:

In order to accommodate technological changes and enhance system performance in the State of Connecticut, T-Mobile will be changing its equipment configuration at certain cell sites.

As required by Regulations of Connecticut State Agencies (R.C.S.A.) Section 16-50j-73, the Connecticut Siting Council has been notified of the changes and will review T-Mobile's proposal. Please accept this letter as notification under Section 16-50j-73 of construction which constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2).

The accompanying letter to the Siting Council fully describes T-Mobile's proposal for the above referenced cell site. However, if you have any questions or require any further information on our plans or the Siting Council's procedures, please call me at 508.251.0720 x 3804.

Thank you,

Kri Pelletier

SBA Communications Company 33 Boston Post Road West Suite 320

Marlborough, MA 01752

508-251-0720 x 3804 + T

508-251-1755 + F

203-446-7700 + C

kpelletier@sbasite.com



FDH Engineering, Inc., 6521 Meridien Drive Raleigh, NC 27616, Ph. 919.755.1012

Structural Analysis for SBA Network Services, Inc.

150' Monopole Tower

SBA Site Name: Simsbury 2, CT SBA Site ID: CT10022-A-06 T-Mobile Site ID: CTHA531A

Site Address: 225 Grist Mill Road, Simsbury, CT 06070

FDH Project Number 15BFGJ1400

Analysis Results

		, ,	
Tower Components		99.5%	Sufficient
	Foundation	92.0%	Sufficient

Prepared By:

Christopher Lee, EIT **Project Engineer**

Reviewed By:

Dennis D. Abel, PE Director of Structural Engineering CT PE License No. 23247

FDH Engineering, Inc. 6521 Meridien Drive Raleigh, NC 27616 (919) 755-1012

info@fdh-inc.com

March 20, 2015

Prepared pursuant to TIA/EIA-222-F Structural Standards for Steel Antenna Towers and Antenna Supporting Structures and 2005 Connecticut Building Code

Document No. ENG-RPT-501S

Revision Date: 06/17/11

TABLE OF CONTENTS

EXECUTIVE SUMMARY	3
Conclusions	3
Recommendations	
APPURTENANCE LISTING	
RESULTS	
GENERAL COMMENTS	6
IMITATIONS	6
APPENDIX	7

EXECUTIVE SUMMARY

At the request of SBA Network Services, Inc., FDH Engineering, Inc. performed a structural analysis of the monopole located in Simsbury, CT to determine whether the tower is structurally adequate to support both the existing and proposed loads pursuant to the *Structural Standards for Steel Antenna Towers and Antenna Supporting Structures, TIA/EIA-222-F* and 2005 Connecticut Building Code (CBC). Information pertaining to the existing/proposed antenna loading, foundation dimensions, current tower geometry, geotechnical data, and member sizes was obtained from:

Rohn Industries (File No. 50754AE) original design drawings dated February 13, 2002 FDH Engineering, Inc. (Project No. 15BGSH1600) Geotechnical Evaluation of Subsurface Conditions dated March 19, 2015
FDH Engineering, Inc. (Job No. 07-0321T) TIA Inspection Report dated April 10, 2007
SBA Network Service, Inc.

The basic design wind speed per the TIA/EIA-222-F standards and 2005 CBC is 80 mph without ice and 38 mph with 1" radial ice. Ice is considered to increase in thickness with height.

Conclusions

With the existing and proposed antennas from T-Mobile in place at 131 ft, the tower meets the requirements of the *TIA/EIA-222-F* standards and the *2005 CBC* provided the **Recommendations** listed below are satisfied. Furthermore, provided the foundation constructed per the original design drawings (See Rohn Industries File No. 50754AE) and utilizing the existing soil parameters (see FDH Project No. 15BGSH1600), the foundation should have the necessary capacity to support the existing and proposed loading. For a more detailed description of the analysis of the tower, see the **Results** section of this report.

Our structural analysis has been performed assuming all information provided to FDH Engineering, Inc. is accurate (i.e., the steel data, tower layout, existing antenna loading, and proposed antenna loading) and that the tower has been properly erected and maintained per the original design drawings.

Recommendations

To ensure the requirements of the *TIA/EIA-222-F* standards and the *2005 CBC* are met with the existing and proposed loading in place, we have the following recommendations:

- 1. The proposed feed lines should be installed inside the monopole's shaft.
- 2. The proposed TMAs should be installed directly behind the existing and proposed panel antennas.

APPURTENANCE LISTING

The proposed and existing antennas with their corresponding cables/coax lines are shown in **Table 1**. If the actual layout determined in the field deviates from the layout, FDH Engineering, Inc. should be contacted to perform a revised analysis.

Table 1 - Appurtenance Loading

Existing Loading:

Antenna Elevation (ft)	Description	Feed Lines ¹	Carrier	Mount Elevation (ft)	Mount Type
151	(2) KMW AM-X-CD-16-65-00T-RET (4) Powerwave P65-17-XLH-RR (3) Kathrein 800-10121 (3) CCI DTMABP7819VG12A (12) Kathrein 860-1006 (6) Ericsson RUS-01 (3) Andrew ABT-DRDM-ADBH (1) Raycap DC-6-48-60-18-8F (3) Kathrein 782-10250 (3) CSS DBC-750 (1) LMU	(12) 1-5/8" (1) 3" Conduit (1) 10mm Fiber (2) 12 Gauge DC Cables	Cingular	151	(1) 12.5' Low Profile Platform
143	(1) GPS	(1) 7/8"			
141	(3) Antel BXA 70063-6CF (3) Antel BXA 171085/8BF (3) Antel BXA 70080/4CF (3) Antel BXA 171063/12CF (3) Alcatel Lucent RRH 2X40AWS (6) RFS FD9R6004/2C-3L (1) RFS DB-T1-6Z-8AB-0Z	(12) 1-5/8" (1) 1-5/8" Fiber	Verizon	141	(1) 15' Low Profile Platform
131	(3) RFS APX16DWV-16DWVS-C (3) RFS ATM1412D-1A20 (3) Ericsson KRY 144-1	(12) 7/8"	T-Mobile	131	Direct
123	(3) RFS APXVTM14-C-I30 (3) RFS APXVSPP18-C-A20 (3) Alcatel Lucent TD-RRH8x20-25 (3) Alcatel Lucent 1900 MHz (3) Alcatel Lucent 800 MHz (3) Alcatel Lucent 800 MHz (4) RFS ACU-A20-N	(4) 1-1/4" Fiber	Sprint	123	(1) 14' Low Profile Platform
111	(12) Decibel DB844H90E-XY	(12) 1-1/4"	Nextel	111	(1) 14' Low Profile Platform

^{1.} Feed lines installed inside the pole's shaft unless otherwise noted.

Proposed Carrier Final Loading:

Antenna Elevation (ft)	Description	Feed Lines	Carrier	Mount Elevation (ft)	Mount Type
131	(3) RFS APX16DWV-16DWVS-C (3) Commscope LNX-6515DS (3) RFS ATM1412D-1A20 (3) Ericsson KRY 144-1 (3) Kathrein 782 11056	(18) 7/8"	T-Mobile	131	(3) 5' T-Arms (Site Pro P/N: UDS-NPL)

Document No. ENG-RPT-501S Revision Date: 06/17/11 4

RESULTS

The following yield strength of steel for individual members was used for analysis:

Table 2 - Material Strength

Member Type	Yield Strength
Tower Shaft Sections	65 ksi
Base Plate	60 ksi
Anchor Bolts	75 ksi

Table 3 displays the summary of the ratio (as a percentage) of force in the member to their capacities. Values greater than 100% indicate locations where the maximum force in the member exceeds its capacity. **Table 4** displays the maximum foundation reactions.

If the assumptions outlined in this report differ from actual field conditions, FDH Engineering, Inc. should be contacted to perform a revised analysis. Furthermore, as no information pertaining to the allowable twist and sway requirements for the existing or proposed appurtenances was provided, deflection and rotation were not taken into consideration when performing this analysis.

See the **Appendix** for detailed modeling information.

Table 3 - Summary of Working Percentage of Structural Components

Section No.	Elevation (ft)	Component Type	Size	% Capacity*	Pass Fail
L1	150 - 127.92	Pole	TP33.46x28.3x0.1875	23.9	Pass
L2	127.92 - 84.0867	Pole	TP43.21x32.1113x0.25	69.2	Pass
L3	84.0867 - 41.5033	Pole	TP52.55x41.4575x0.3125	77.1	Pass
L4	41.5033 - 0	Pole	TP61.5x50.4229x0.3125	99.2	Pass
		Anchor Bolts	(14) 2.25"Ø w/ BC = 67.625"	86.6	Pass
		Base Plate	PL 73.5"Ø x 2" Thick	66.9	Pass

^{*}Capacities include a 1/3 allowable stress increase for wind per TIA/EIA-222-F standards.

Table 4 - Maximum Base Reactions

Base Reactions	Current Analysis* (TIA/EIA-222-F)	Original Design (TIA/EIA-222-F)
Axial	37 k	66 k
Shear	30 k	26 k
Moment	3,382 k-ft	3,324 k-ft

^{*}Foundation determined to be adequate per independent analysis.

Document No. ENG-RPT-501S Revision Date: 06/17/11 5

6

GENERAL COMMENTS

This engineering analysis is based upon the theoretical capacity of the structure. It is not a condition assessment of the tower and its foundation. It is the responsibility of SBA Network Services, Inc. to verify that the tower modeled and analyzed is the correct structure (with accurate antenna loading information) modeled. If there are substantial modifications to be made or the assumptions made in this analysis are not accurate, FDH Engineering, Inc. should be notified immediately to perform a revised analysis.

LIMITATIONS

All opinions and conclusions are considered accurate to a reasonable degree of engineering certainty based upon the evidence available at the time of this report. All opinions and conclusions are subject to revision based upon receipt of new or additional/updated information. All services are provided exercising a level of care and diligence equivalent to the standard and care of our profession. No other warranty or guarantee, expressed or implied, is offered. Our services are confidential in nature and we will not release this report to any other party without the client's consent. The use of this engineering work is limited to the express purpose for which it was commissioned and it may not be reused, copied, or distributed for any other purpose without the written consent of FDH Engineering, Inc.

Document No. ENG-RPT-501S Revision Date: 06/17/11

7

APPENDIX

Document No. ENG-RPT-501S Revision Date: 06/17/11

33.4560 0.1875 22.08 4. 8 127.9 ft 48.00 43.2060 18 84.1 ft A572-65 48.00 52.5500 7.6 41.5 ft 48.00 61.5000 50.4224 48 0.0 ft 22.8 Socket Length (ft) Number of Sides Thickness (in) Top Dia (in) Bot Dia (in) Weight (K) Length (ft) Grade

DESIGNED APPURTENANCE LOADING

TYPE FLEVATION TYPE FLEVATION				
TYPE	ELEVATION	TYPE	ELEVATION	
AM-X-CW-16-65-00T-RET w/Mount Pipe	151	GPS	141	
AM-X-CW-16-65-00T-RET w/Mount	151	15' Low Profile Platform	141	
Pipe	1.2.	APX16DWV-16DWVS-C w/ Mount Pipe	131	
(2) P65-17-XLH-RR w/Mount Pipe	151	APX16DWV-16DWVS-C w/ Mount	131	
P65-17-XLH-RR w/Mount Pipe	151	Pipe		
P65-17-XLH-RR w/Mount Pipe	151	APX16DWV-16DWVS-C w/ Mount Pipe	131	
800 10121 w/ Mount Pipe	151		404	
800 10121 w/ Mount Pipe	151	ATM1412D-1A20 TMA ATM1412D-1A20 TMA	131	
800 10121 w/ Mount Pipe	151	ATM1412D-1A20 TMA ATM1412D-1A20 TMA	131	
DTMABP7819VG12A TMA	151	KRY 144-1	131	
DTMABP7819VG12A TMA	151	KRY 144-1 KRY 144-1		
DTMABP7819VG12A TMA	151	KRY 144-1 KRY 144-1	131	
(4) 860 10006 CCU	151		-	
(4) 860 10006 CCU	151	LNX-6515DS-A1M w/ Mount Pipe	131	
(4) 860 10006 CCU	151	LNX-6515DS-A1M w/ Mount Pipe	131	
(2) RRUS-11	151	LNX-6515DS-A1M w/ Mount Pipe	131	
(2) RRUS-11	151	782 11056	131	
(2) RRUS-11	151	782 11056	131	
ABT-DRDM-ADBH	151	782 11056	131	
ABT-DRDM-ADBH	151	(3) T-Arms	131	
ABT-DRDM-ADBH	151	APXVTM14-C-I20 w/ Mount Pipe	123	
DC6-48-60-18-8F Surge Arrestor	151	APXVTM14-C-I20 w/ Mount Pipe	123	
782 10250 Diplexer	151	APXVTM14-C-I20 w/ Mount Pipe	123	
782 10250 Diplexer	151	APXVSPP18-C-A20 w/Mount Pipe	123	
782 10250 Diplexer	151	APXVSPP18-C-A20 w/Mount Pipe	123	
DBC-750	151	APXVSPP18-C-A20 w/Mount Pipe	123	
DBC-750	151	TD-RRH8x20-25	123	
DBC-750	151	TD-RRH8x20-25	123	
LMU	151	TD-RRH8x20-25	123	
12.5 Low Profile Platform	151	1900 MHz RRH	123	
Lightning Rod	150	1900 MHz RRH	123	
BXA-70063/6CF w/Mount Pipe	141	1900 MHz RRH	123	
BXA-70063/6CF w/Mount Pipe	141	800 MHz RRH	123	
BXA-70063/6CF w/Mount Pipe	141	800 MHz RRH	123	
BXA-171085-8BF w/ Mount Pipe	141	800 MHz RRH	123	
BXA-171085-8BF w/ Mount Pipe	141	800 MHz Filter	123	
BXA-171085-8BF w/ Mount Pipe	141	800 MHz Filter	123	
BXA-70080/4CF w/ Mount Pipe	141	800 MHz Filter	123	
BXA-70080/4CF w/ Mount Pipe	141	ACU-A20-N RET	123	
BXA-70080/4CF w/ Mount Pipe	141	ACU-A20-N RET	123	
BXA-171063/12CF w/ Mount Pipe	141	(2) ACU-A20-N RET	123	
BXA-171063/12CF w/ Mount Pipe	141	(2) Empty Mount Pipe	123	
BXA-171063/12CF w/ Mount Pipe	141	(2) Empty Mount Pipe	123	
RRH2X40-AWS	141	(2) Empty Mount Pipe	123	
RRH2X40-AWS	141	14' Low Profile Platform	123	
RRH2X40-AWS	141	(4) DB844H90E-XY w/Mount Pipe	111	
DB-T1-6Z-8AB-0Z	141	(4) DB844H90E-XY w/Mount Pipe	111	
(2) FD9R6004/2C-3L	141	(4) DB844H90E-XY w/Mount Pipe	111	
(2) FD9R6004/2C-3L	141	14' Low Profile Platform	111	
(2) FD9R6004/2C-3L	141		•	

MATERIAL STRENGTH

GRADE	Fy	Fu	GRADE	Fy	Fu
A572-65	65 ksi	80 ksi			

TOWER DESIGN NOTES 59 K 1. Tower is located in Hartford County, Connecticut. 2. Tower designed for a 80 mph basic wind in accordance with the TIA/EIA-222-F Standard. SHEAR

MOI3. Yower is also designed for a 38 mph basic wind with 1.00 in ice. Ice is considered to 1002 kipatrease in thickness with height.

4. Deflections are based upon a 50 mph wind.5. TOWER RATING: 99.5%

TORQUE 0 kip-ft

AXIAL 37 K SHEAR* MOMENT 3394 kip-ft 30 K

TORQUE 1 kip-ft REACTIONS - 80 mph WIND

AXIAL

38 mph WIND - 1.0000 in ICE

FDH Engineering, Inc. ^{ob:} Simsbury 2, CT10022-A-06 Project: 15BFGJ1400 6521 Meridien Drive, Suite 107 Client: SBA Network Services, Inc. Drawn by: CLee App'd: Raleigh, North Carolina 27616 Date: 03/20/15 Scale: NTS Code: TIA/EIA-222-F Phone: 9197551012 Tower Analysis Dwg No. E-1 FAX: 9197551031



RADIO FREQUENCY EMISSIONS ANALYSIS REPORT EVALUATION OF HUMAN EXPOSURE POTENTIAL TO NON-IONIZING EMISSIONS

T-Mobile Existing Facility

Site ID: CTHA531A

Simsburry 2 225 Grist Mill Road Simsbury, CT 06070

March 27, 2015

EBI Project Number: 6215001897

Site Compliance Summary		
Compliance Status:	COMPLIANT	
Site total MPE% of FCC general public allowable limit:	58.62 %	



March 27, 2015

T-Mobile USA Attn: Jason Overbey, RF Manager 35 Griffin Road South Bloomfield, CT 06002

Emissions Analysis for Site: CTHA531A – Simsburry 2

EBI Consulting was directed to analyze the proposed T-Mobile facility located at **225 Grist Mill Road**, **Simsbury**, **CT**, for the purpose of determining whether the emissions from the Proposed T-Mobile Antenna Installation located on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter (μ W/cm²). The number of μ W/cm² calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits, therefore it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) - (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

General population/uncontrolled exposure limits apply to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general public would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Public exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter (μ W/cm²). The general population exposure limit for the 700 MHz Band is 467 μ W/cm², and the general population exposure limit for the PCS and AWS bands is 1000 μ W/cm². Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.



Occupational/controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

CALCULATIONS

Calculations were done for the proposed T-Mobile Wireless antenna facility located at **225 Grist Mill Road, Simsbury, CT**, using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. Since T-Mobile is proposing highly focused directional panel antennas, which project most of the emitted energy out toward the horizon, all calculations were performed assuming a lobe representing the maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was focused at the base of the tower. For this report the sample point is the top of a 6 foot person standing at the base of the tower.

For all calculations, all equipment was calculated using the following assumptions:

- 1) 2 GSM channels (PCS Band 1900 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel
- 2) 2 UMTS channels (AWS Band 2100 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel.
- 3) 2 LTE channels (AWS Band 2100 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 60 Watts per Channel.
- 4) 1 LTE channel (700 MHz Band) was considered for each sector of the proposed installation. This channel has a transmit power of 30 Watts.
- 5) All radios at the proposed installation were considered to be running at full power and were uncombined in their RF transmissions paths per carrier prescribed configuration. Per FCC OET Bulletin No. 65 Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. This is rarely the case, and if so, is never continuous.



- 6) For the following calculations the sample point was the top of a six foot person standing at the base of the tower. The maximum gain of the antenna per the antenna manufactures supplied specifications minus 10 dB was used in this direction. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 7) The antennas used in this modeling are the RFS APX16DWV-16DWVS-C-A20 for 1900 MHz (PCS) and 2100 MHz (AWS) channels and the Commscope LNX-6515DS-VTM for 700 MHz channels. This is based on feedback from the carrier with regards to anticipated antenna selection. The RFS APX16DWV-16DWVS-C-A20 has a maximum gain of 16.3 dBd at its main lobe. The Commscope LNX-6515DS-VTM has a maximum gain of 14.6 dBd at its main lobe. The maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was used for all calculations. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 8) The antenna mounting height centerline of the proposed antennas is **131 feet** above ground level (AGL).
- 9) Emissions values for additional carriers were taken from the Connecticut Siting Council active database. Values in this database are provided by the individual carriers themselves.

All calculations were done with respect to uncontrolled / general public threshold limits.



T-Mobile Site Inventory and Power Data

	_				
Sector:	A	Sector:	В	Sector:	C
Antenna #:	1	Antenna #:	1	Antenna #:	1
Make / Model:	RFS APX16DWV-	Make / Model:	RFS APX16DWV-	Make / Model:	RFS APX16DWV-
Make / Model:	16DWVS-C-A20		16DWVS-C-A20		16DWVS-C-A20
Gain:	16.3 dBd	Gain:	16.3 dBd	Gain:	16.3 dBd
Height (AGL):	131	Height (AGL):	131	Height (AGL):	131
F D 1	1900 MHz(PCS) /	Frequency Bands	1900 MHz(PCS) /	Frequency Bands	1900 MHz(PCS) /
Frequency Bands	2100 MHz (AWS)		2100 MHz (AWS)		2100 MHz (AWS)
Channel Count	6	Channel Count	6	# PCS Channels:	6
Total TX Power:	240	Total TX Power:	240	# AWS Channels:	240
ERP (W):	10,237.91	ERP (W):	10,237.91	ERP (W):	10,237.91
Antenna A1 MPE%	2.36	Antenna B1 MPE%	2.36	Antenna C1 MPE%	2.36
Antenna #:	2	Antenna #:	2	Antenna #:	2
Make / Model:	Commscope LNX- 6515DS-VTM	Make / Model:	Commscope LNX- 6515DS-VTM	Make / Model:	Commscope LNX- 6515DS-VTM
Gain:	14.6 dBd	Gain:	14.6 dBd	Gain:	14.6 dBd
Height (AGL):	131	Height (AGL):	131	Height (AGL):	131
Frequency Bands	700 MHz	Frequency Bands	700 MHz	Frequency Bands	700 MHz
Channel Count	1	Channel Count	1	Channel Count	1
Total TX Power:	30	Total TX Power:	30	Total TX Power:	30
ERP (W):	865.21	ERP (W):	865.21	ERP (W):	865.21
Antenna A2 MPE%	0.43	Antenna B2 MPE%	0.43	Antenna C2 MPE%	0.43

Site Composite MPE%			
Carrier	MPE%		
T-Mobile	8.35		
AT&T	18.51 %		
Verizon Wireless	26.96 %		
Nextel	4.63 %		
Sprint	0.17 %		
New England Site Mngmt	No Values Listed		
Town of Simsbury	No Values Listed		
Site Total MPE %:	58.62 %		

T-Mobile Sector 1 Total:	2.78 %
T-Mobile Sector 2 Total:	2.78 %
T-Mobile Sector 3 Total:	2.78 %
Cita Total:	59 62 0/

21 B Street Burlington, MA 01803 Tel: (781) 273.2500 Fax: (781) 273.3311



Summary

All calculations performed for this analysis yielded results that were **within** the allowable limits for general public exposure to RF Emissions.

The anticipated maximum composite contributions from the T-Mobile facility as well as the site composite emissions value with regards to compliance with FCC's allowable limits for general public exposure to RF Emissions are shown here:

T-Mobile Sector	Power Density Value (%)
Sector 1:	2.78 %
Sector 2:	2.78 %
Sector 3:	2.78 %
T-Mobile Total:	8.35 %
Site Total:	58.62 %
Site Compliance Status:	COMPLIANT

The anticipated composite MPE value for this site assuming all carriers present is **58.62%** of the allowable FCC established general public limit sampled at the ground level. This is based upon values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.


Scott Heffernan

RF Engineering Director

EBI Consulting

21 B Street

Burlington, MA 01803

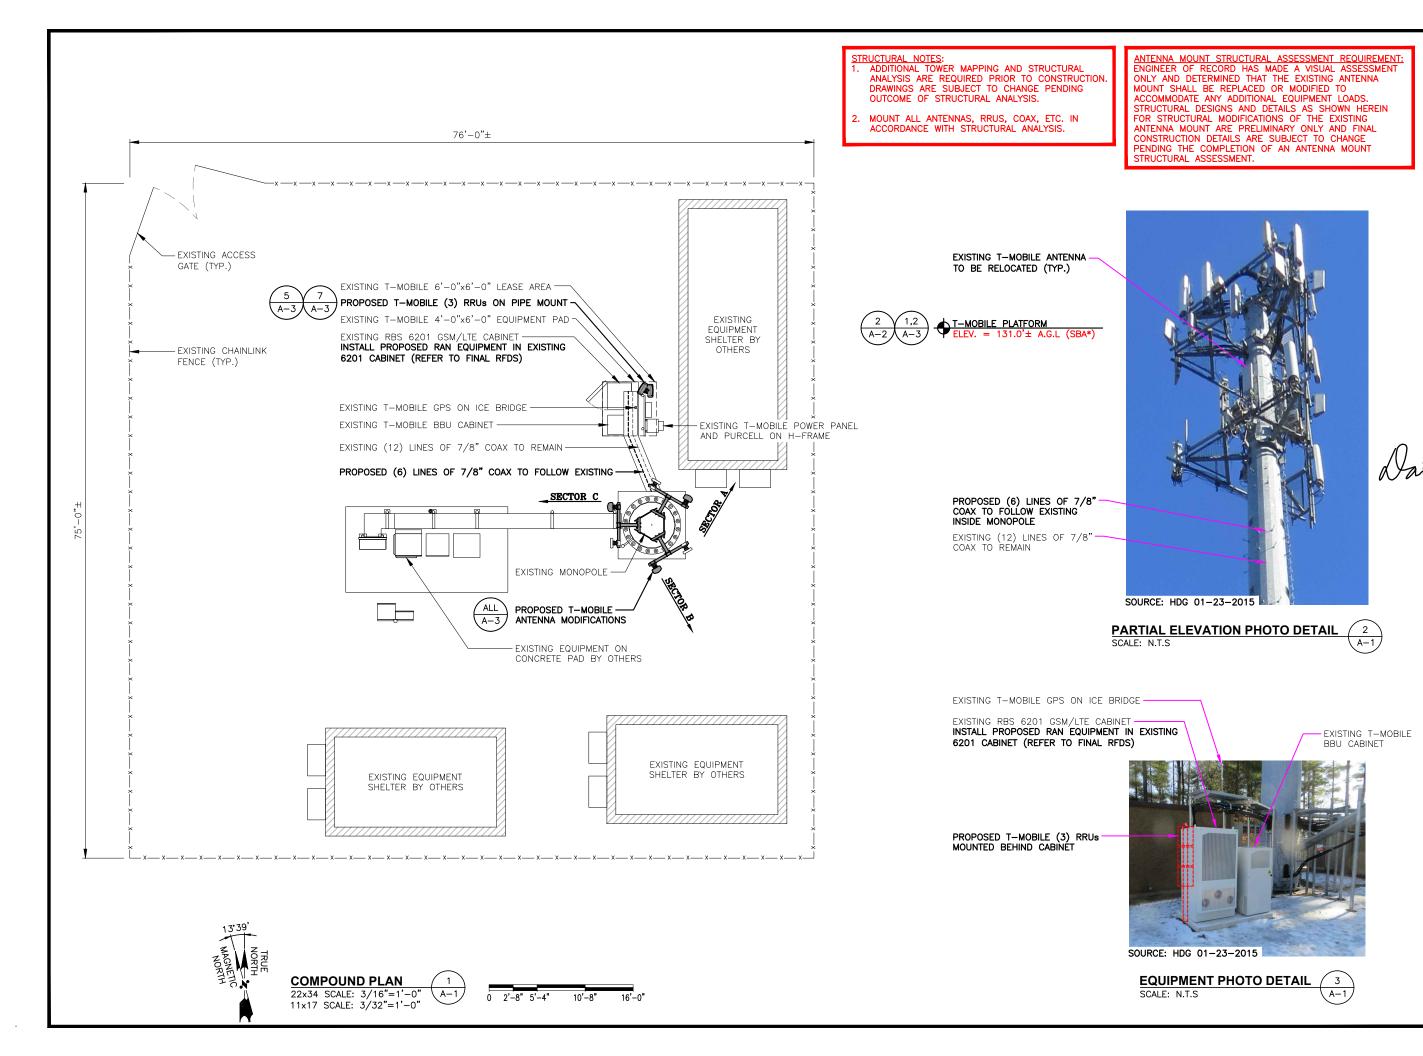

T-MOBILE NORTHEAST LLC


35 GRIFFIN ROAD SOUTH BLOOMFIELD, CT 06002 OFFICE: (860) 648-1116



BA COMMUNICATIONS CORP.
3 BOSTON POST ROAD WEST, SUITE 320 TEL: {508} 251-072
MARLBOROUGH, MA 01752 FAX: (508) 251-175



BUILDING 20 NORTH, SUITE 3090 TEL: (978) 557-555; N. ANDOVER, MA 01845 FAX: (978) 336-558;



CHECKED BY:

ADDDOVED DV

APPROVED BY: DPH

REV. DATE DESCRIPTION BY

SITE NUMBER: CTHA531A

SITE NAME: SBA SIMSBURY

MONOPOLE SITE ADDRESS:

225 GRIST MILL ROAD SIMSBURY, CT 06070 HARTFORD COUNTY

SHEET TITLE

COMPOUND & ELEVATION PLAN

SHEET NUMBER

A-1

- ADDITIONAL TOWER MAPPING AND STRUCTURAL ANALYSIS ARE REQUIRED PRIOR TO CONSTRUCTION.
 DRAWINGS ARE SUBJECT TO CHANGE PENDING OUTCOME OF STRUCTURAL ANALYSIS.
- 2. MOUNT ALL ANTENNAS, RRUS, COAX, ETC. IN ACCORDANCE WITH STRUCTURAL ANALYSIS.

ANTENNA MOUNT STRUCTURAL ASSESSMENT REQUIREMENT: ENGINEER OF RECORD HAS MADE A VISUAL ASSESSMENT ONLY AND DETERMINED THAT THE EXISTING ANTENNA MOUNT SHALL BE REPLACED OR MODIFIED TO ACCOMMODATE ANY ADDITIONAL EQUIPMENT LOADS. STRUCTURAL DESIGNS AND DETAILS AS SHOWN HEREIN FOR STRUCTURAL MODIFICATIONS OF THE EXISTING ANTENNA MOUNT ARE PRELIMINARY ONLY AND FINAL CONSTRUCTION DETAILS ARE SUBJECT TO CHANGE PENDING THE COMPLETION OF AN ANTENNA MOUNT

T-MOBILE NORTHEAST LLC


35 GRIFFIN ROAD SOUTH BLOOMFIELD, CT 06002 OFFICE: (860) 648-1116



BA COMMUNICATIONS CORP. 33 BOSTON POST ROAD WEST, SUITE 320 TEL: (508) 251-072 MARLBOROUGH, MA 01752 FAX: (508) 251-175



BUILDING 20 NORTH, SUITE 3090 TEL: (978) 557-5553 N. ANDOVER, MA 01845 FAX: (978) 336-5586



CHECKED BY:

APPROVED BY:

	SUBMITTALS			
REV.	DATE	DESCRIPTION	B	

DPH

SITE NUMBER: CTHA531A


0 03/03/15 ISSUED FOR CONSTRUCTION JA

SITE NAME:

SBA SIMSBURY MONOPOLE SITE ADDRESS:

225 GRIST MILL ROAD SIMSBURY, CT 06070 HARTFORD COUNTY

SHEET TITLE EXISTING & PROPOSED ANTENNA **PLANS**

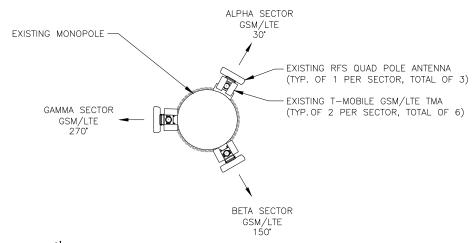

EXISTING ANTENNA PLAN (A-2

SPECIAL WORK NOTE: VERTICALLY CENTER ON EXISTING MOUNTING RAIL, THE PIPE MAST

PROPOSED T-MOBILE ANTENNA ON PROPOSED PIPE -(TYP. OF 1 PER SECTOR, TOTAL OF 3)

PROPOSED T-MOBILE SMART BIAS TEE A-3 (TYP. OF 1 PER SECTOR, TOTAL OF 3) PROPOSED MONOPOLE T-ARM KIT (SITE PRO1 PART # UDS-NPL)


RELOCATED EXISTING RFS QUAD POLE ANTENNA (TYP. OF 1 PER SECTOR, TOTAL OF 3)




SOURCE: HDG 01-23-2015

PROPOSED ANTENNA PHOTO DETAIL

SCALE: N.T.S

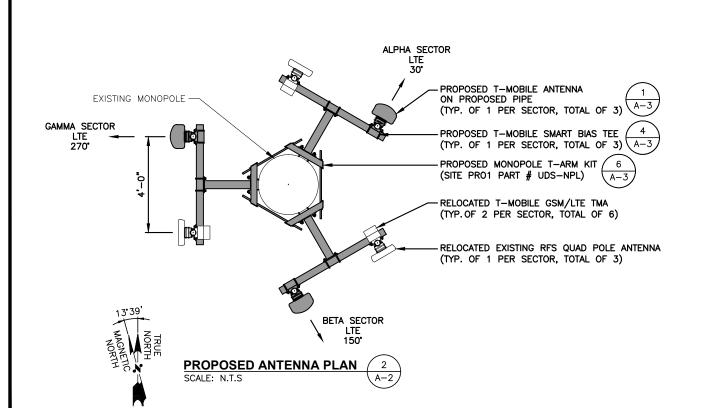

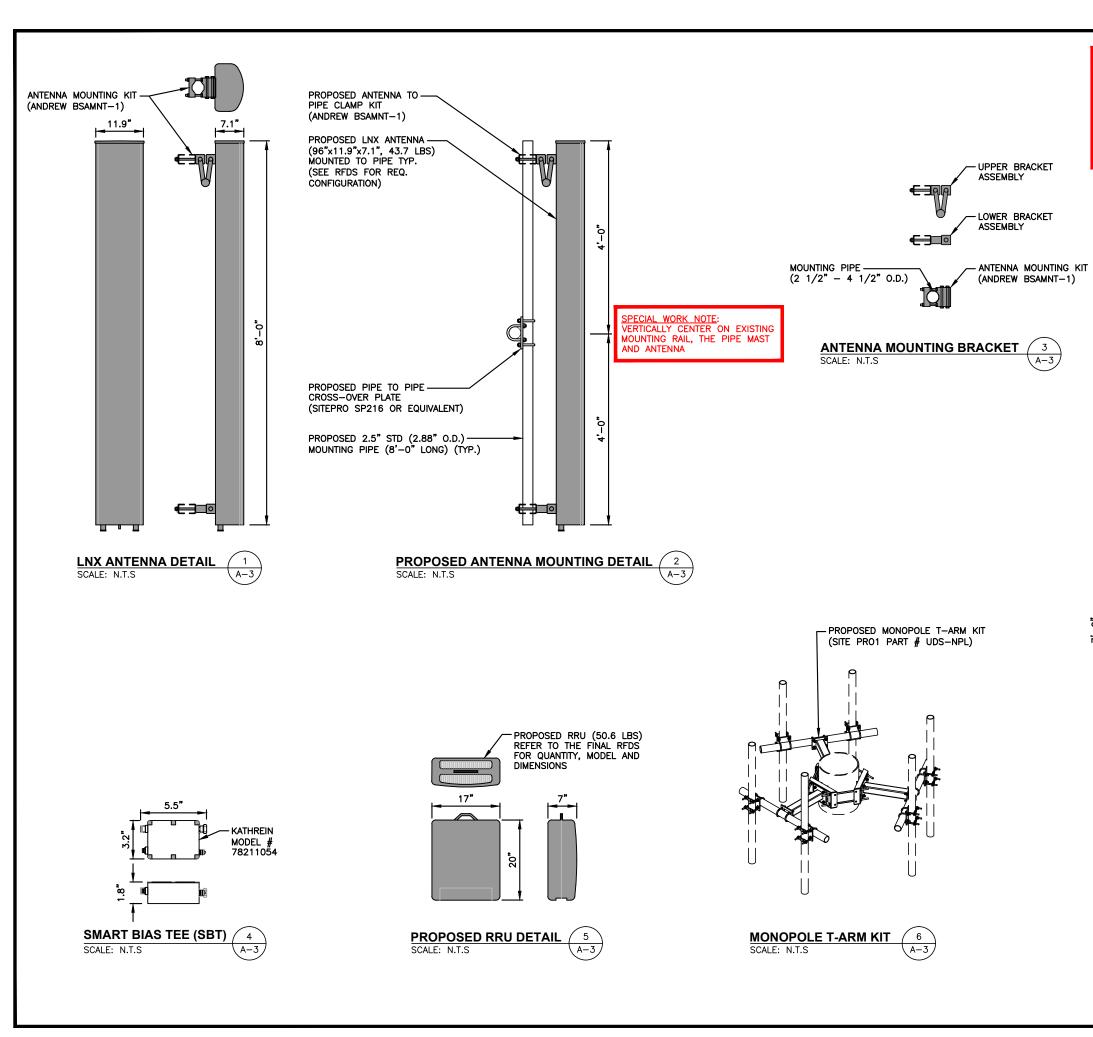

ANTENNA MOUNT STRUCTURAL ASSESSMENT REQUIREMENT: ENGINEER OF RECORD HAS MADE A VISUAL ASSESSMENT ONLY AND DETERMINED THAT THE EXISTING ANTENNA MOUNT SHALL BE REPLACED OR MODIFIED TO ACCOMMODATE ANY ADDITIONAL EQUIPMENT LOADS. STRUCTURAL DESIGNS AND DETAILS AS SHOWN HEREIN FOR STRUCTURAL MODIFICATIONS OF THE EXISTING ANTENNA MOUNT ARE PRELIMINARY ONLY AND FINAL CONSTRUCTION DETAILS ARE SUBJECT TO CHANGE PENDING THE COMPLETION OF AN ANTENNA MOUNT STRUCTURAL ASSESSMENT.

STRUCTURAL NOTES:
1. ADDITIONAL TOWER MAPPING AND STRUCTURAL ANALYSIS ARE REQUIRED PRIOR TO CONSTRUCTION. DRAWINGS ARE SUBJECT TO CHANGE PENDING OUTCOME OF STRUCTURAL ANALYSIS.

PROPOSED RRU

PROPOSED RRU (TOTAL OF 3)

3-1/2" SCH.40 GALV. PIPE

PROPOSED 12"ø CONCRETE PIER

(TYP.)

12**"**ø

RRU MOUNTING DETAIL

SCALE: N.T.S

(BEHIND)

2. MOUNT ALL ANTENNAS, RRUS, COAX, ETC. IN ACCORDANCE WITH STRUCTURAL ANALYSIS.

T-MOBILE NORTHEAST LLC

> 35 GRIFFIN ROAD SOUTH BLOOMFIELD, CT 06002 OFFICE: (860) 648-1116



BA COMMUNICATIONS CORP. 33 BOSTON POST ROAD WEST, SUITE 320 TEL: (508) 251-072 MARLBOROUGH, MA 01752 FAX: (508) 251-175



BUILDING 20 NORTH, SUITE 3090 TEL: (978) 557-5553 N. ANDOVER, MA 01845 FAX: (978) 336-5586



CHECKED BY:

APPROVED BY: DPH

SUBMITTALS				
REV.	REV. DATE DESCRIPTION		BY	
0	03/03/15	ISSUED FOR CONSTRUCTION	JA	

SITE NUMBER: CTHA531A SITE NAME:

SBA SIMSBURY MONOPOLE SITE ADDRESS:

225 GRIST MILL ROAD SIMSBURY, CT 06070 HARTFORD COUNTY

> SHEET TITLE DETAILS

A-3