



**SAI Group**  
12 Industrial Way  
Salem, NH 03079  
603-421-0470

July 2, 2026

Melanie A. Bachman  
Executive Director  
Connecticut Siting Council  
10 Franklin Square  
New Britain, CT 06051

**Notice of Exempt Modification – New Cingular Wireless PCS, LLC (AT&T)**  
**56 Egypt Road, Somers, CT – Four Town Fair 2026**  
**N 41.96138889**  
**W 72.46194444**

Dear Ms. Bachman:

AT&T intends to install a temporary cellular communications facility for service during the 2026 Four Town Fair. Please accept this letter as notification pursuant to Regulations of Connecticut State Agencies § 16-50j-73, of construction that constitutes an exempt modification under R.C.S.A. § 16-50j-72(d). In accordance with R.C.S.A. § 16-50j-73, a copy of this letter is being sent to Somers First Selectman Tim Keeney and Zoning Enforcement Officer, Jennifer Roy as well as to the property owner.

AT&T operates under licenses issued by the Federal Communications Commission (FCC) to provide mobile communications service in Tolland County, which includes the area to be served by AT&T's proposed temporary installation. The proposed temporary facility would be installed on property owned by Union Agricultural Society, Inc. (Four Town Fairgrounds).

**Proposed Temporary Facility**

The proposed temporary cell site meets the criteria set forth in R.C.S.A § 16-50j-72(d) for temporary cellular service for events of statewide significance. The site is necessary to provide additional system capacity to accommodate increased communication needs during Four Town Fair 2026. This facility may include B2, B5, B17, B14, B29, B30, B66 & n77 hardware that is 4G(LTE) and/or 5GNR capable through remote software configuration and either or both services may be turned on or off at various times.

The Four Town Fair will be held in the area of Four Town Fairgrounds on September 17-20th, 2026.

The temporary cell site will be located at 56 Egypt Road in Somers on property owned by Union Agricultural Society. An e-mail from Union Agricultural Society authorizing AT&T's use of the property for this purpose is attached. Power and telephone connections will be provided from the existing utility services at the Fairgrounds. AT&T's equipment will be deployed to the property on or around August 24th. The site will begin on-air operations on September 10th and be removed on or around September 22<sup>nd</sup>.

AT&T's temporary cell site will consist of radio equipment installed in a fully self-contained vehicle referred to as a Super COLT (Cell on Light Truck). The COLT carries three integrated pneumatic masts, which can be extended to a height of up to 59 ft above ground level. The proposed temporary cell site will not increase noise levels by six decibels or more.

The COLT will be fitted with (1) Galtronics GP2406-06670 antenna at 60 feet, (3) Kathrein 840-10520 antennas at 55 feet above ground level and (3) Ericsson AIR6472 antennas at 50 feet.

### **Power Density Calculations**

AT&T's temporary cell site will not result in a total radio frequency electromagnetic radiation power density, measured at six feet above ground level at the temporary tower location, at or above State or Federal standards. Please see attached Radio Frequency Emissions Report. The report shows that AT&T's temporary transmissions from the temporary cell site will result in a maximum cumulative percent of MPE that is calculated to be 22.02% of the FCC limit for general population / uncontrolled environments.

### **Conclusion**

For the foregoing reasons, AT&T respectfully requests that the Council acknowledge AT&T's Notice of Exempt Modification for the temporary cell site to be operated during the 2026 Four Town Fair pursuant to R.C.S.A. § 16-50j-72(d).

Please feel free to call me at (860) 670-9068 with any questions regarding this Notice. Thank you for your consideration in this matter.

Sincerely,

*Mark Roberts*

Mark Roberts  
Consultant for SAI  
Mark.Roberts@QCDevelopment.net

### **Attachments**

cc: First Selectman Tim Keeney – Elected Official  
Jennifer Roy - Zoning Enforcement Officer  
Union Agricultural Society, Inc. – Property Owner

# 56 EGYPT RD

**Location** 56 EGYPT RD

**Mblu** 02/ 13/ / /

**Acct#** 00061700

**Owner** UNION AGRICULTURAL SOCIETY INC

**Assessment** \$484,600

**Appraisal** \$692,200

**PID** 3022

**Building Count** 5

**Dev Lot**

**Dev Map**

**Exempt Code** X

## Current Value

Appraisal			
Valuation Year	Improvements	Land	Total
2020	\$362,600	\$329,600	\$692,200

Assessment			
Valuation Year	Improvements	Land	Total
2020	\$253,900	\$230,700	\$484,600

## Owner of Record

**Owner** UNION AGRICULTURAL SOCIETY INC  
**Co-Owner** FOUR TOWN FAIRGROUNDS  
**Address** PO BOX 24  
SOMERS, CT 06071

**Sale Price** \$0  
**Certificate**  
**Book & Page** 0033/0468  
**Sale Date** 09/13/1960  
**Instrument**

## Ownership History

Ownership History					
Owner	Sale Price	Certificate	Book & Page	Instrument	Sale Date
UNION AGRICULTURAL SOCIETY INC	\$0		0033/0468		09/13/1960

## Building Information

### Building 1 : Section 1


**Year Built:** 1900

# Town of Somers, Connecticut - Assessment Parcel Map



Parcel: 02-13

Address: 56 EGYPT RD

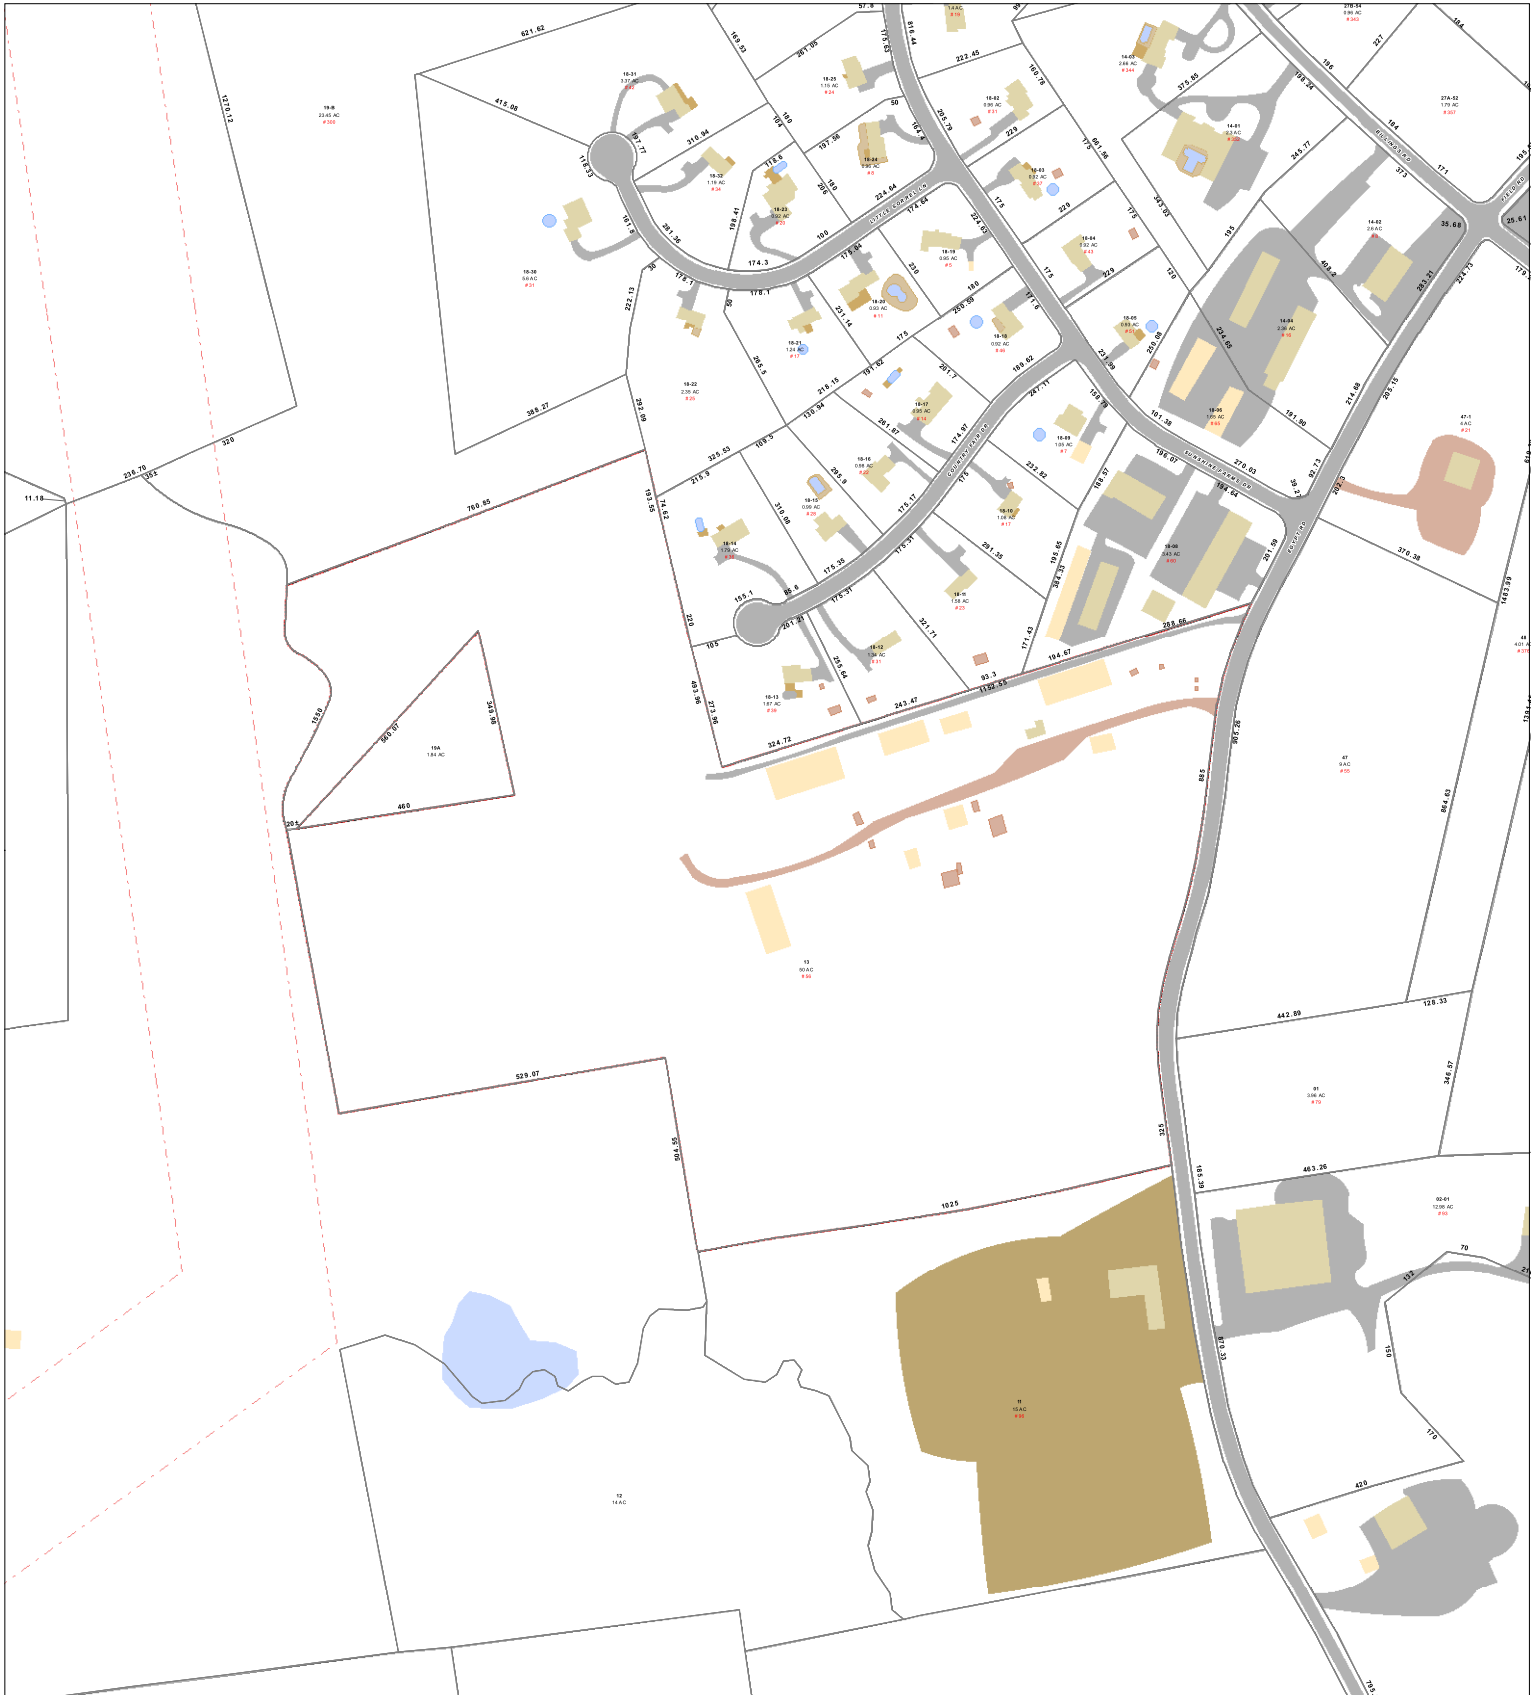

Map Produced June 2025



Approximate Scale: 1 inch = 400 feet

Disclaimer: This map is for informational purposes only. All information is subject to verification by any user. The Town of Somers and its mapping contractors assume no legal responsibility for the information contained herein.

**From:** [John Streiber](#)  
**To:** [Mark Roberts](#)  
**Subject:** Fw: FOUR TOWN FAIR 2026 - AT&T TEMP SITE  
**Date:** Thursday, June 25, 2026 9:24:20 AM

---

This email authorizes AT&T Wireless and/or its authorized agent to file for all necessary federal state or local permits and approvals for the proposed temporary wireless telecommunications facility at the UNION AGRICULTURAL SOCIETY property located at 56 Egypt road, Somers, CT for the Four Towns Fair 2026.

## **John Streiber**

Ellington Electrical Contractor

E-1. 125319

4 Hatheway Road

Ellington,CT.06029-3215

O: 860-875-8800

C: 860-209-1692



**LOCATION OF AT&T TEMPORARY COLT – FOUR TOWN FAIR 2025**




AT&T CELL ON LIGHT TRUCK (COLT)




NAME: AT&T Non-CDL Colt  
DWG: SW-6449-A  
KLS 1/9/2024

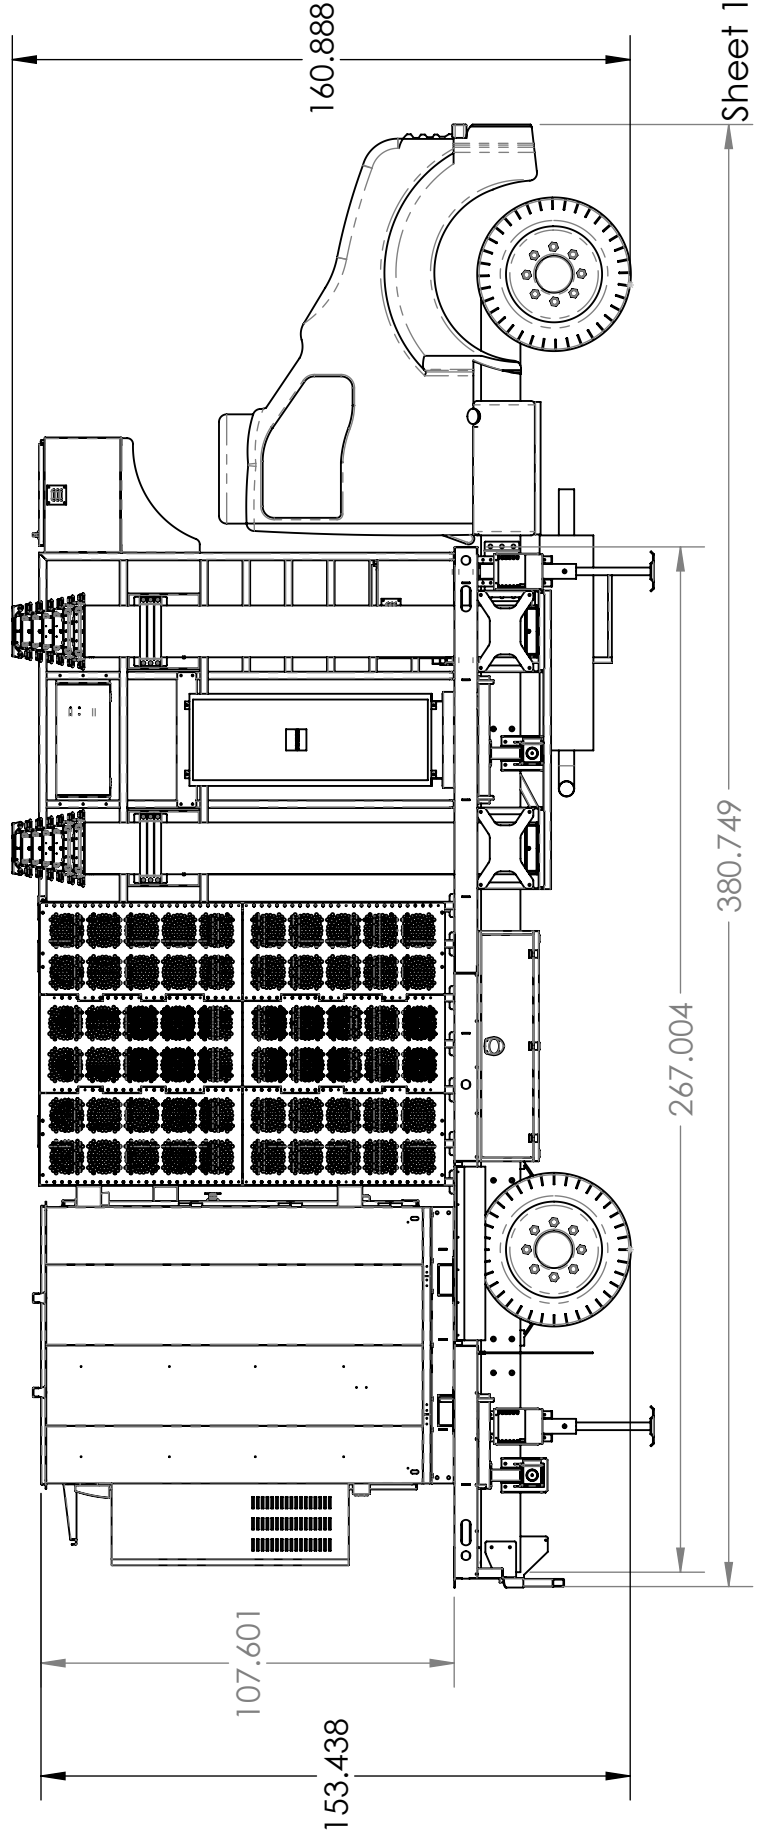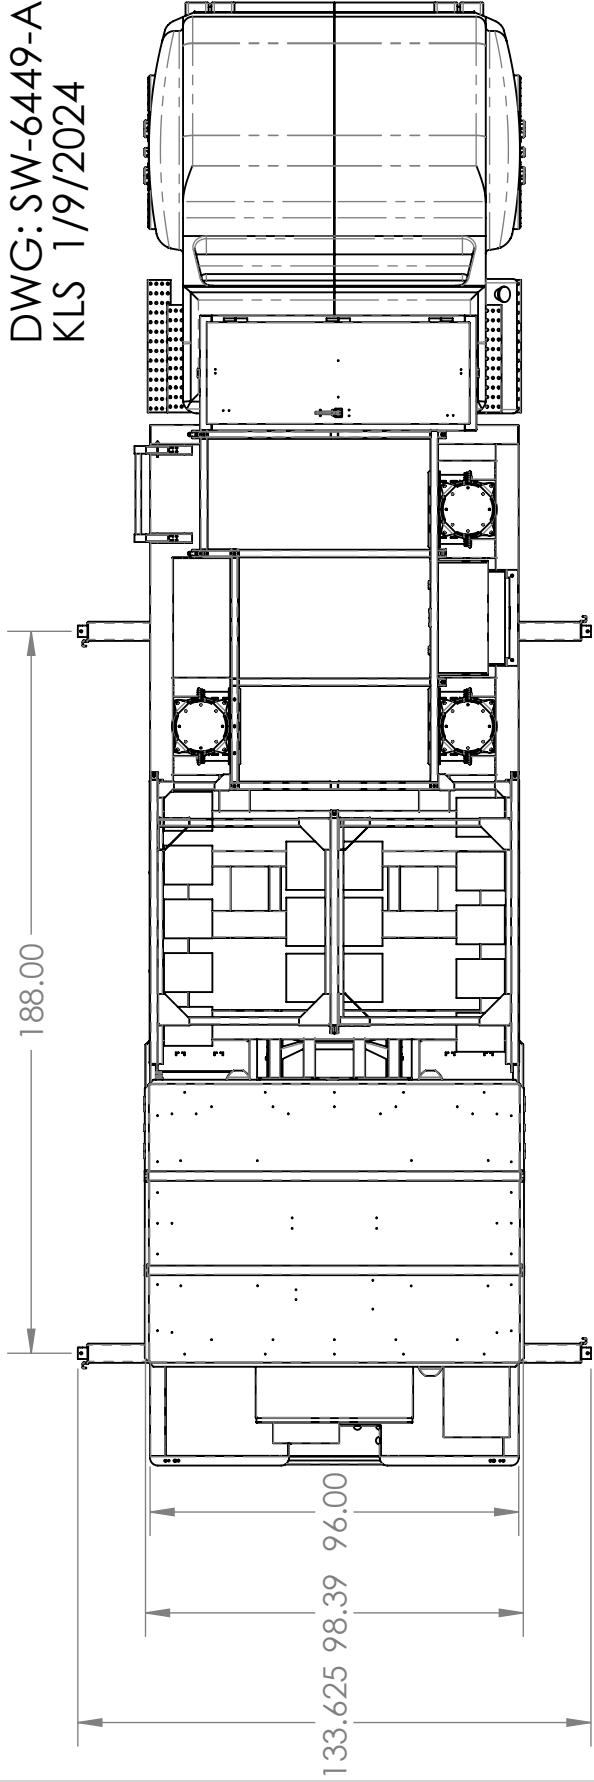




NAME: AT&T Non-CDL Colt  
DWG: SW-6449-A  
KLS 1/9/2024

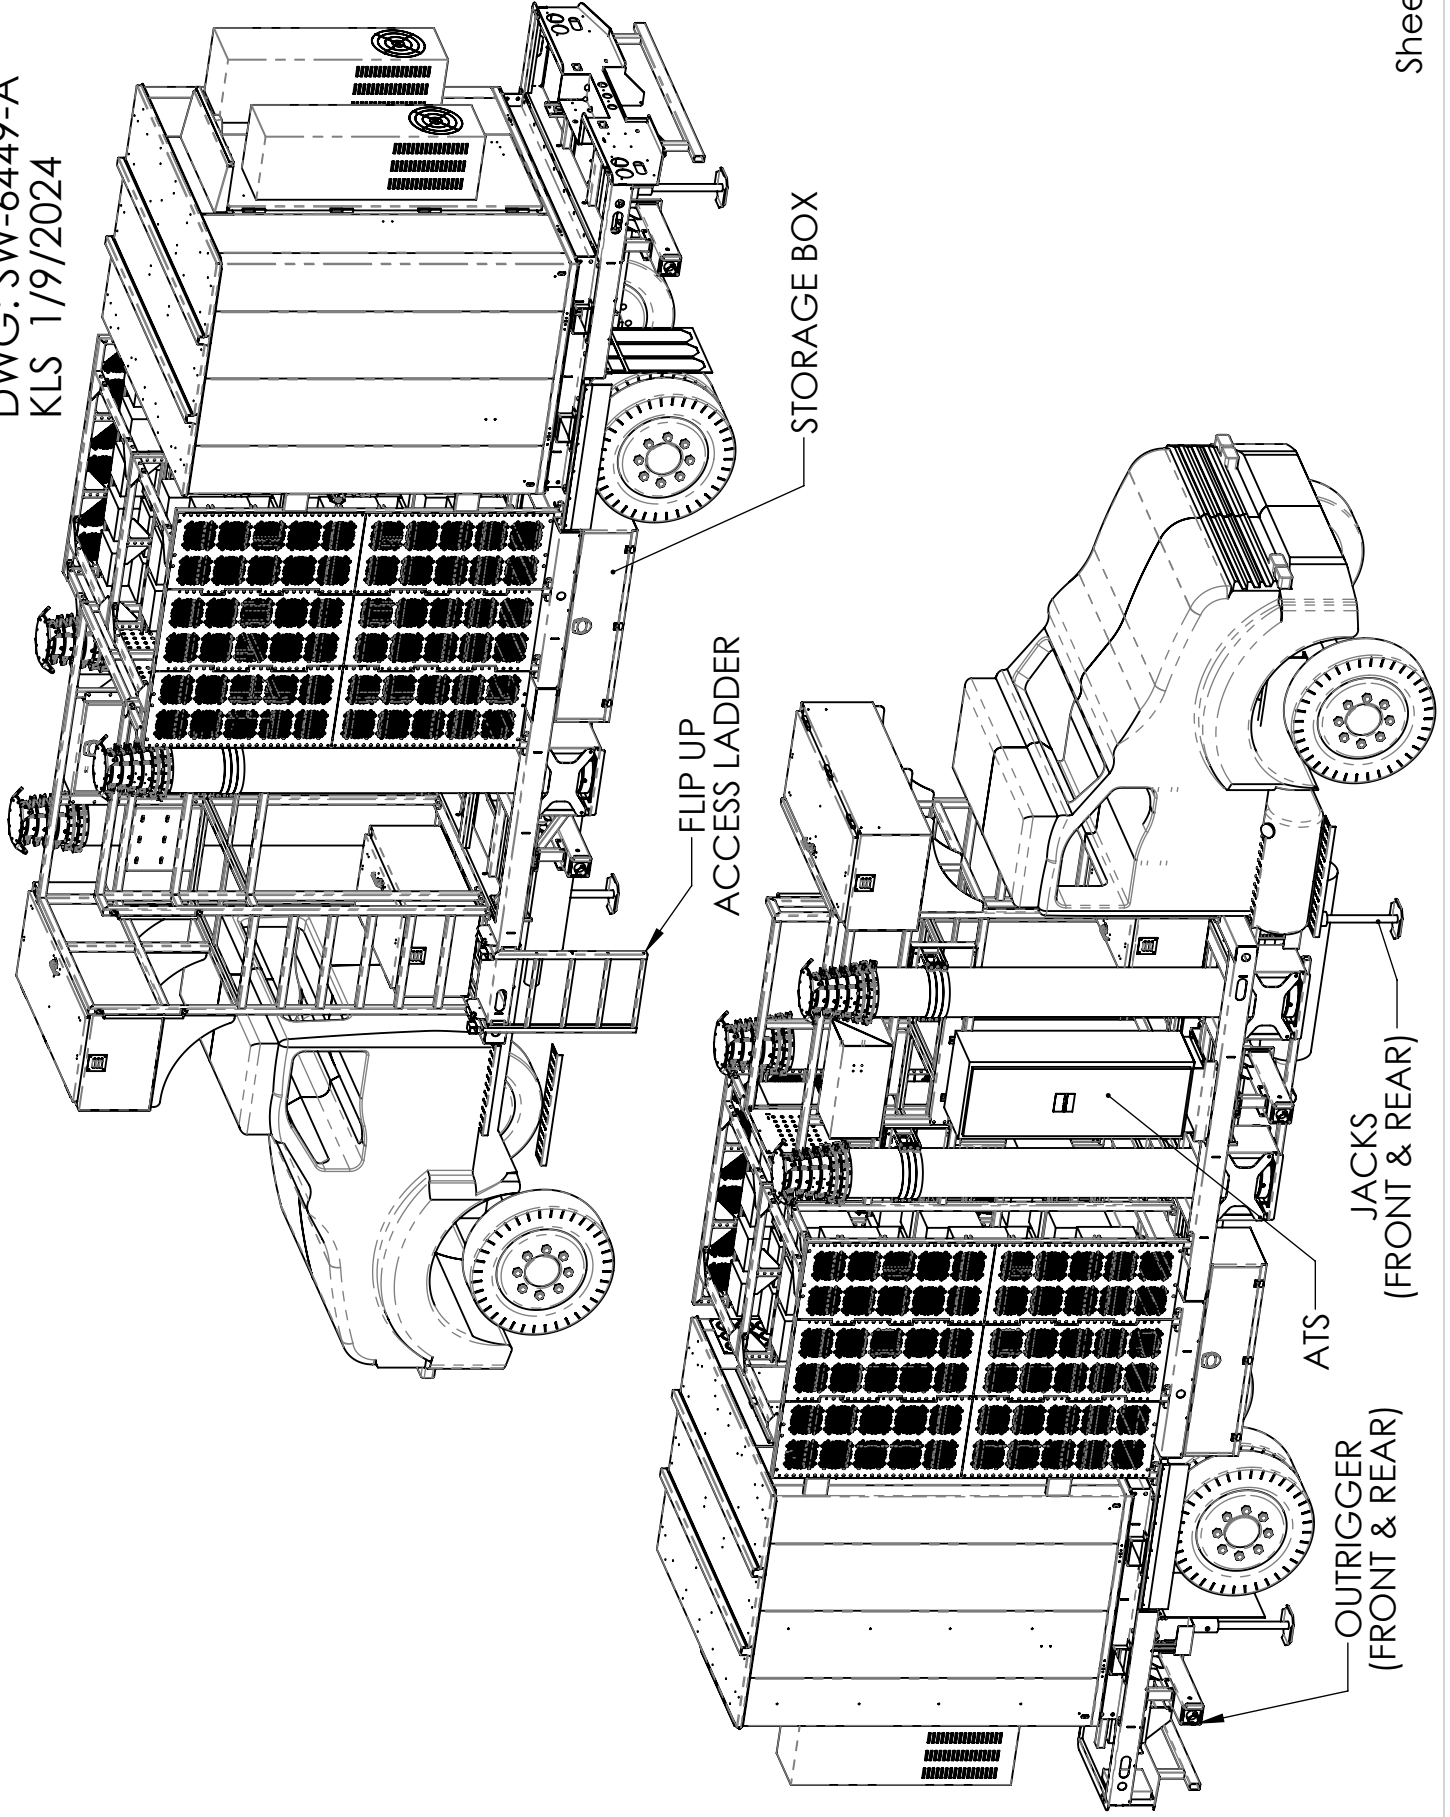


NAME: ATS Non-CDL Colt  
DWG: SW-6449-A  
KLS 1/9/2024

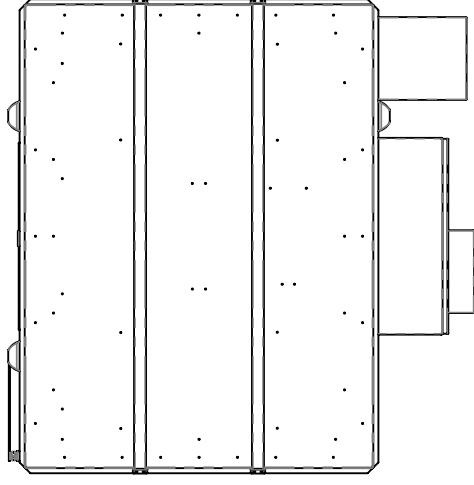

RF ENTRY  
GROUND BAR

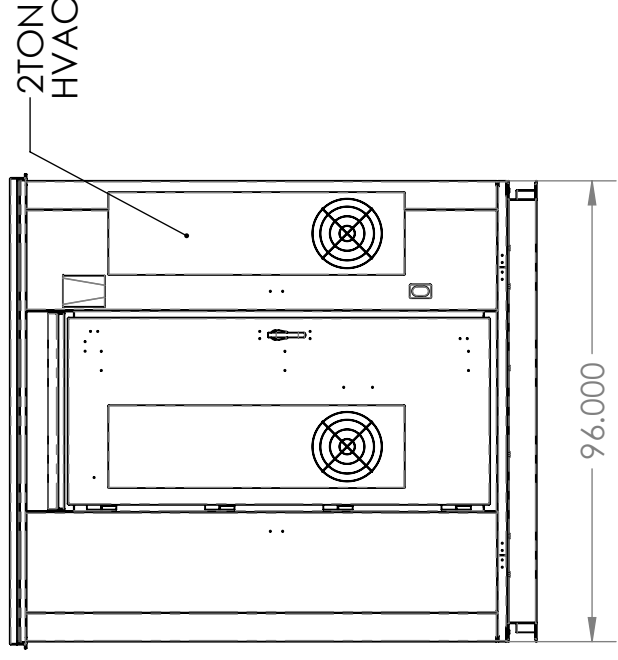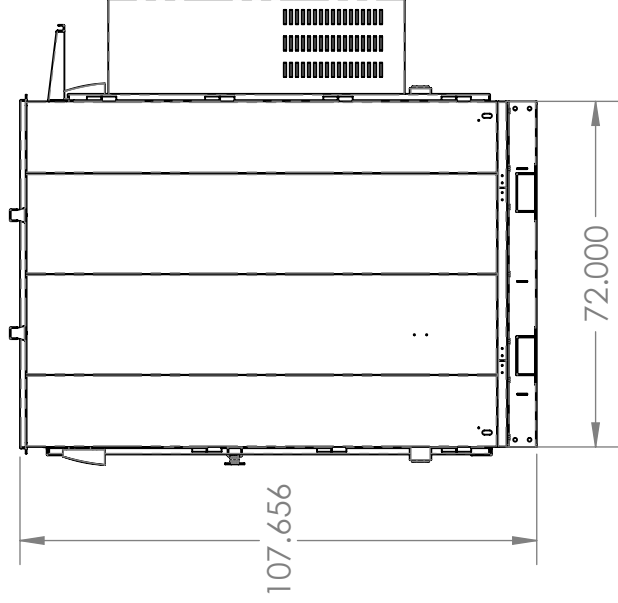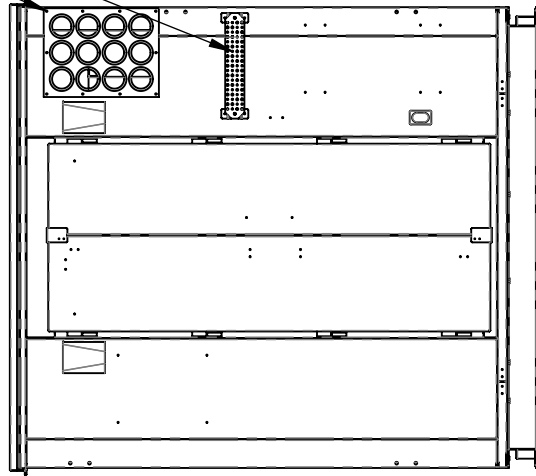

NAME: ATS Non-CDL Colt  
DWG: SW-6449-A  
KLS 1/9/2024

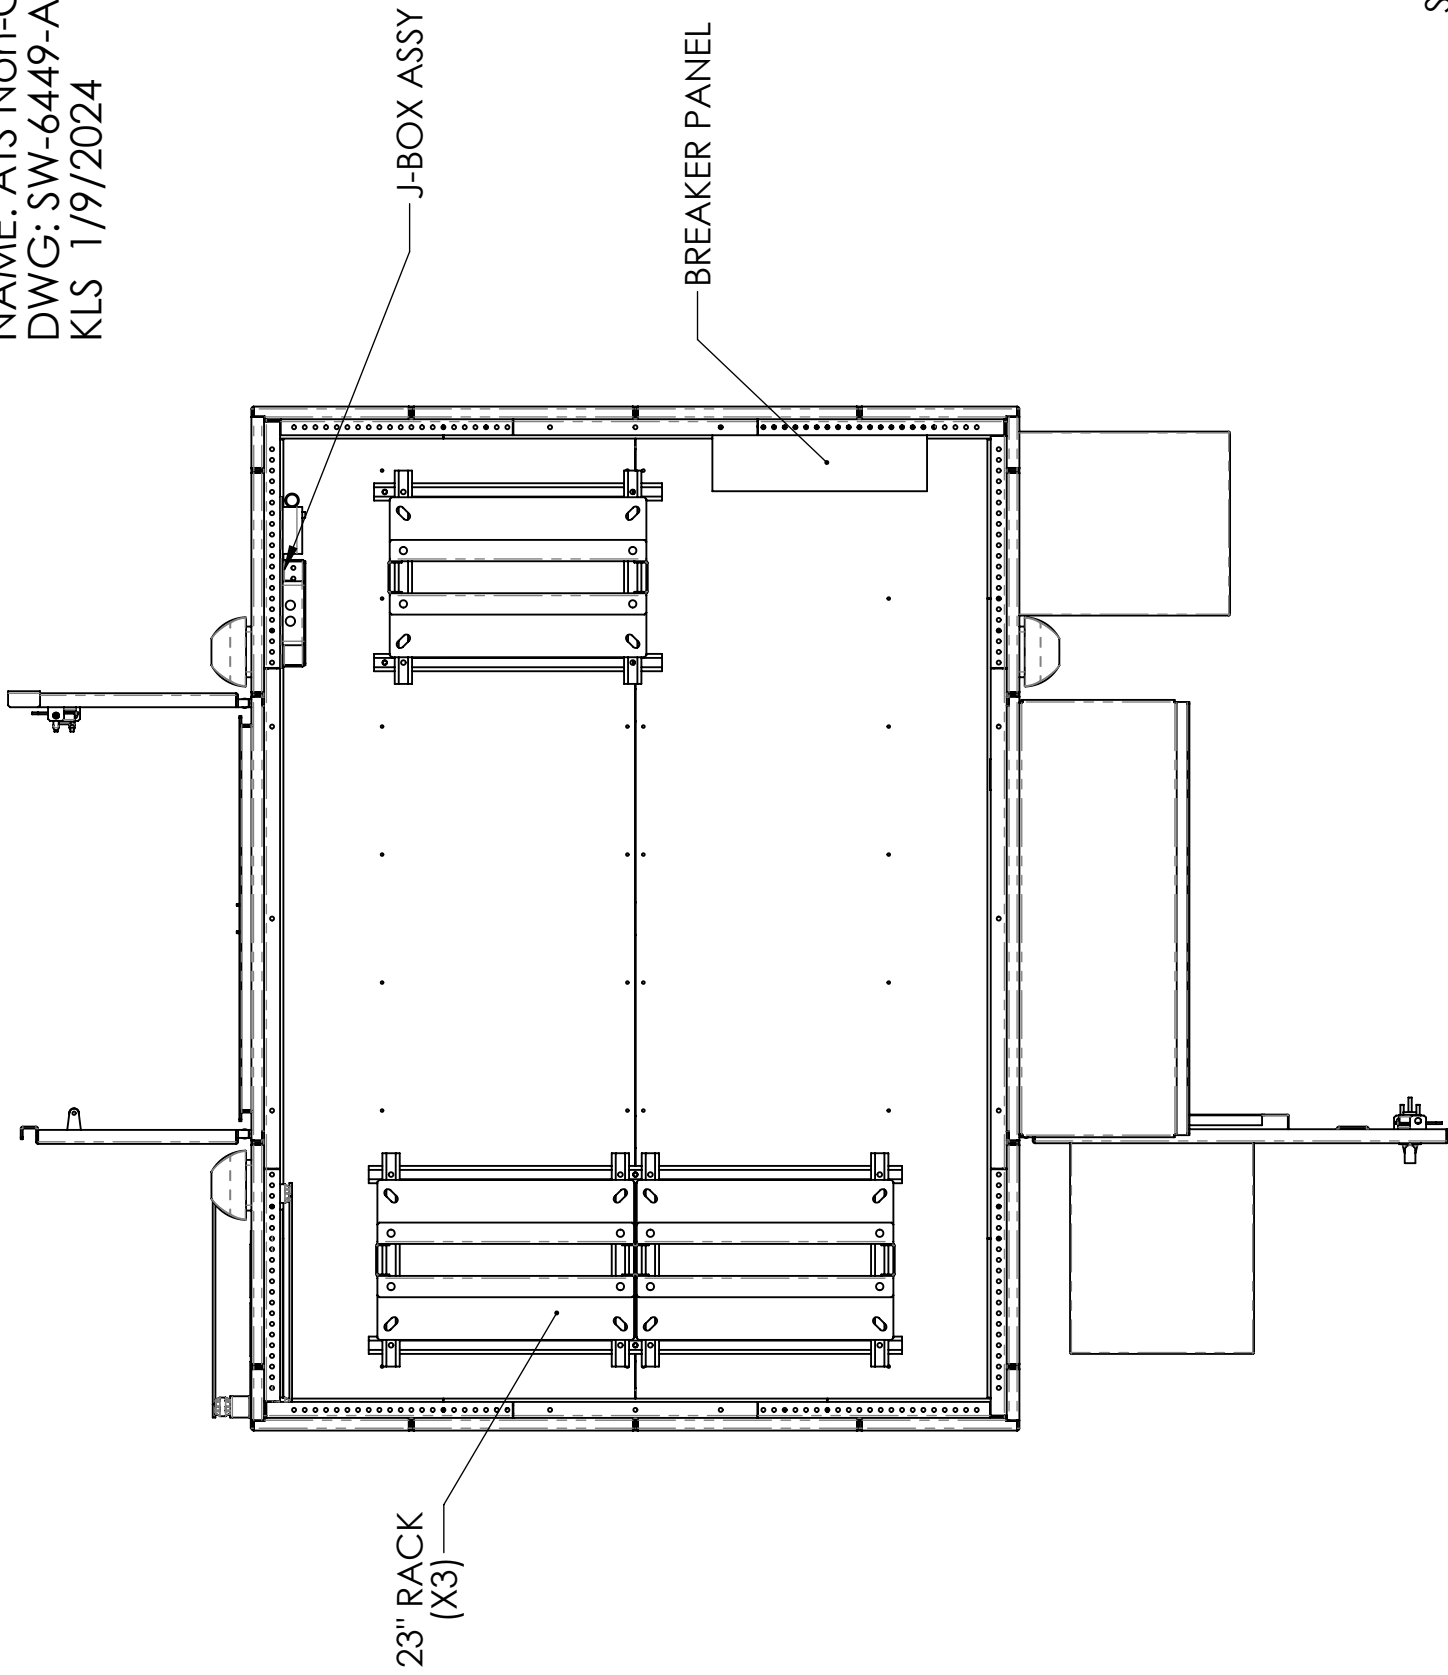



C Squared Systems, LLC  
65 Dartmouth Drive  
Auburn, NH 03032  
(603) 644-2800  
[support@csquaredsystems.com](mailto:support@csquaredsystems.com)

---

## Calculated Radio Frequency Emissions Report



CT6540

56 Egypt Road, Somers, CT

---

June 12, 2026

## Table of Contents

1. Introduction .....	1
2. FCC Guidelines for Evaluating RF Radiation Exposure Limits.....	1
3. RF Exposure Calculation Methods.....	2
4. Antenna Inventory .....	3
5. Calculated % MPE Results.....	4
6. Conclusion.....	6
7. Statement of Certification.....	6
Attachment A: References .....	7
Attachment B: FCC Limits for Maximum Permissible Exposure (MPE) .....	8
Attachment C: AT&T Antenna Model Data Sheets and Electrical Patterns .....	10

## List of Figures

Figure 1: Graph of General Population % MPE vs. Distance.....	4
Figure 2: Graph of FCC Limits for Maximum Permissible Exposure (MPE).....	9

## List of Tables

Table 1: AT&T's Proposed Antenna Inventory.....	3
Table 2: Maximum Percent of General Population Exposure Values, .....	5
Table 3: FCC Limits for Maximum Permissible Exposure .....	8

## 1. Introduction

The purpose of this report is to investigate compliance with applicable FCC regulations for the proposed temporary deployment of AT&T's antenna arrays mounted at 50', 55', and 60' above ground level (AGL) on top of the CoW (Cell On Wheels) located at 56 Egypt Road, Somers, CT for the 2026 Four Town Fair. The coordinates of the proposed temporary CoW site are 41° 57' 41.0" N, 72° 27' 43.0" W.

AT&T is proposing to deploy nine (9) directional antennas on its CoW to support its 4G LTE and 5G NR networks, including the FirstNet National Public Safety Broadband Network ("NPSBN").

This report considers the proposed antenna configuration for AT&T to calculate the resulting percentage Maximum Permissible Exposure (% MPE) at ground level around the facility.

## 2. FCC Guidelines for Evaluating RF Radiation Exposure Limits

In 1985, the FCC established rules to regulate radio frequency (RF) exposure from FCC licensed antenna facilities. In 1996, the FCC updated these rules, which were further amended in August 1997 by OET Bulletin 65 Edition 97-01. These new rules include Maximum Permissible Exposure (MPE) limits for transmitters operating between 300 kHz and 100 GHz. The FCC MPE limits are based upon those recommended by the National Council on Radiation Protection and Measurements (NCRP), developed by the Institute of Electrical and Electronics Engineers, Inc., (IEEE) and adopted by the American National Standards Institute (ANSI).

The FCC general population/uncontrolled limits set the maximum exposure to which most people may be subjected. General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

Public exposure to radio frequencies is regulated and enforced in units of milliwatts per square centimeter ( $\text{mW}/\text{cm}^2$ ). The general population exposure limits for the various frequency ranges are defined in the documents referenced in Attachment A of this report.

Higher exposure limits are permitted under the occupational/controlled exposure category, but only for persons who are exposed as a consequence of their employment and who have been made fully aware of the potential for exposure, and they must be able to exercise control over their exposure. General population/uncontrolled limits are five times more stringent than the levels that are acceptable for occupational, or radio frequency trained individuals. Attachment B contains excerpts from OET Bulletin 65 and defines the Maximum Exposure Limit.

Finally, it should be noted that the MPE limits adopted by the FCC for both general population/uncontrolled exposure and for occupational/controlled exposure incorporate a substantial margin of safety and have been established to be well below levels generally accepted as having the potential to cause adverse health effects.

### 3. RF Exposure Calculation Methods

The results displayed in the following figures were generated using the following formula as outlined in FCC bulletin OET 65:

$$\text{Power Density} = \left( \frac{GRF^2 \times \text{EIRP}}{4\pi \times R^2} \right) \times \text{Off Beam Loss}$$

Where:

EIRP = Effective Isotropic Radiated Power

R = Radial Distance =  $\sqrt{(H^2 + V^2)}$

H = Horizontal Distance from antenna

V = Vertical Distance from center of antenna

Off Beam Loss is determined by the selected antenna patterns

GRF = Ground reflection factor of 1.6

These calculations assume that the antennas are operating at full power and 100 percent capacity, and that all antenna channels are transmitting simultaneously. Obstructions (trees, buildings, etc.) that would normally attenuate the signal are not considered. As a result, the calculated power density and corresponding % MPE levels reported below are much more conservative (higher) than the actual signal levels will be from the final installation.

The percent of MPE values presented in this report reflect levels that one may encounter from one sector of a carrier's antennas. Most carriers use 3 or 4 sectors per site with azimuths approximately 90 or 120 degrees apart, respectively; therefore, one could not be standing in the main beam of multiple sectors at the same time. In cases where antenna models are not uniform across all sectors, the antenna model with the highest gain and/or electrical down-tilt was used in the calculations. This results in a conservative or "worst case" assumption for percent of MPE calculations.

#### 4. Antenna Inventory

Table 1 below outlines AT&T’s proposed antenna configuration for the site. The associated data model and antenna patterns for these specific antenna models are included in Attachment C.

Operator	Sector / Azimuth	TX Freq (MHz)	Power at Antenna (Watts)	Ant Gain (dBi)	Power EIRP (Watts)	Antenna Model	Beam Width	Mech/ElecTilt	Length (ft)	Antenna Centerline Height (ft)
AT&T	Alpha / 30°	763	160	10.5	1795	840-10520	72	4/0	2	55
		739	160	12.6	2912	GP2406-06670	39.6	4/6	2	60
		850	160	13	3192		33.9			
		1900	160	15.5	5677		32.4			
		2100	240	15.5	8516		32.4			
		2300	100	16	3981		24.2			
		3500	200	19.1	16257		AIR6472			
		3700	200	18.9	15525					
	Beta / 150°	763	160	10.5	1795	840-10520	72	4/0	2	55
		739	160	12.6	2912	GP2406-06670	39.6	4/6	2	60
		850	160	13	3192		33.9			
		1900	160	15.5	5677		32.4			
		2100	240	15.5	8516		32.4			
		2300	100	16	3981		24.2			
		3500	200	19.1	16257		AIR6472			
		3700	200	18.9	15525					
	Gamma / 270°	763	160	10.5	1795	840-10520	72	4/0	2	55
		739	160	12.6	2912	GP2406-06670	39.6	4/6	2	60
		850	160	13	3192		33.9			
		1900	160	15.5	5677		32.4			
		2100	240	15.5	8516		32.4			
		2300	100	16	3981		24.2			
		3500	200	19.1	16257		AIR6472			
		3700	200	18.9	15525					


**Table 1: AT&T’s Proposed Antenna Inventory<sup>1,2</sup>**

<sup>1</sup> Antenna configuration is in reference to AT&T’s Radio Frequency Design Sheet (RFDS) dated 5/4/2026.

<sup>2</sup> Transmit power assumes 0 dB of cable loss.

## 5. Calculated % MPE Results

The calculated % MPE results for the proposed antenna configuration are shown in Figure 1 below. Each frequency band and technology is calculated as well as the resulting cumulative percent of MPE. For completeness, the calculations for this analysis range from 0 feet horizontal distance (directly below the antennas) to a value of 3,000 feet horizontal distance from the site. In addition to the other worst-case scenario considerations that were previously mentioned, the power density calculations to each horizontal distance point away from the antennas was completed using a local maximum off beam antenna gain (within  $\pm 5$  degrees of the true mathematical angle) to incorporate a realistic worst-case scenario.

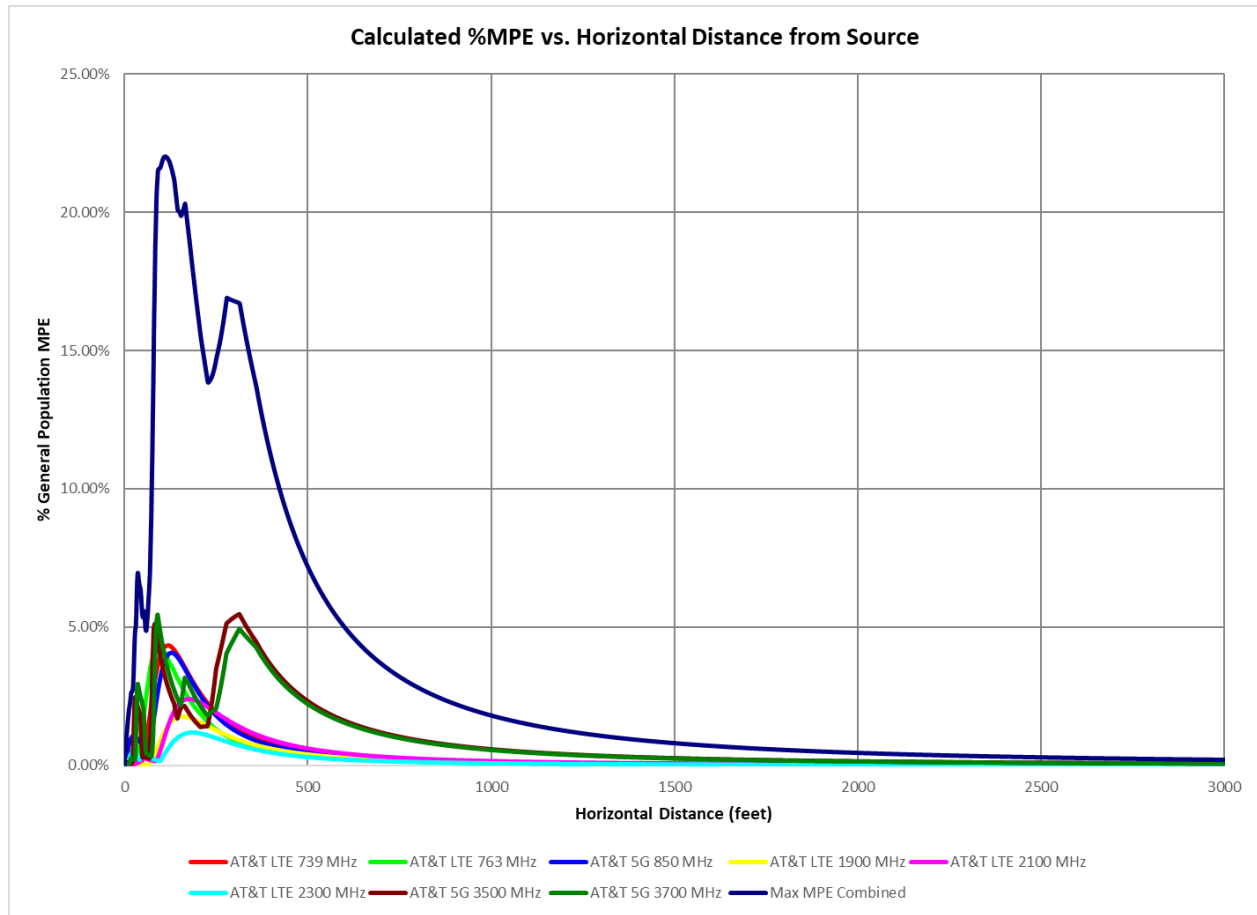

**Figure 1: Graph of General Population % MPE vs. Distance**

The highest percent of MPE (**22.02%** of the General Population limit) is calculated to occur at a horizontal distance of 111 feet from antennas. Please note that the percent of MPE calculations close to the site consider off beam loss, which is determined from the vertical pattern of the antennas used. Therefore, RF power density levels may increase as the distance from the site increases. At distances of approximately 400 feet and beyond, one would now be in the main beam of the antenna patterns and off beam loss is no longer considered. Beyond this point, power density levels vary based on distance from the site and the percent of MPE decreases significantly as distance from the site increases.

Table 2 below lists percent of MPE values as well as the associated parameters that were included in the calculations. As stated in Section 3, all calculations assume that the transmitters are operating at full power and transmitting simultaneously. Obstructions (trees, buildings etc.) that would normally attenuate the signal are not taken into account. Additionally, a six-foot height offset was considered in this analysis to account for the height of a person standing at ground level. As a result, the calculated % MPE levels are significantly higher than the actual signal levels will be from the final installation. The results presented in Figure 1 and Table 2 assume level ground elevation from the base of the site out to the horizontal distances calculated.

Carrier	Number of Transmitters	Power out of Base Station Per Transmitter (Watts)	Antenna Height (Feet)	Distance to the Base of Antennas (Feet)	Power Density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )	% MPE
AT&T 5G 3500 MHz	1	200.0	50.0	111	0.031696	1.000	3.17%
AT&T 5G 3700 MHz	1	200.0	50.0	111	0.038637	1.000	3.86%
AT&T 5G 850 MHz	1	160.0	60.0	111	0.021674	0.567	3.82%
AT&T LTE 1900 MHz	1	160.0	60.0	111	0.012792	1.000	1.28%
AT&T LTE 2100 MHz	1	240.0	60.0	111	0.011131	1.000	1.11%
AT&T LTE 2300 MHz	1	100.0	60.0	111	0.004481	1.000	0.45%
AT&T LTE 739 MHz	1	160.0	60.0	111	0.021195	0.493	4.30%
AT&T LTE 763 MHz	1	160.0	55.0	111	0.020454	0.509	4.02%
<b>Total</b>							<b>22.02%</b>

**Table 2: Maximum Percent of General Population Exposure Values<sup>3,4</sup>**

<sup>3</sup> Frequencies listed are representative of the operating band and are not the specific operating frequency.

<sup>4</sup> The total % MPE listed is a summation of each unrounded contribution. Therefore, summing each rounded value may not reflect the total value listed in the table.

## 6. Conclusion

The above analysis concludes that RF exposure levels from AT&T's proposed equipment configuration will be well below the maximum permissible levels as outlined by the FCC in the OET Bulletin 65 Ed. 97-01. Using the conservative calculation methods and parameters detailed above, the maximum cumulative percent of MPE is calculated to be **22.02% of the FCC limit (General Population/Uncontrolled)**. This maximum cumulative percent of MPE value is calculated to occur 111 feet away from the site.

## 7. Statement of Certification

I certify to the best of my knowledge that the statements in this report are true and accurate. The calculations follow guidelines set forth in ANSI/IEEE Std. C95.1, ANSI/IEEE Std. C95.3, and FCC OET Bulletin 65 Edition 97-01.



Report Prepared By: \_\_\_\_\_  
Evelio Sotolongo  
Sr RF Engineer  
C Squared Systems, LLC

June 11, 2026

Date



Reviewed/Approved By: \_\_\_\_\_  
Martin Lavin  
Senior RF Engineer  
C Squared Systems, LLC

June 12, 2026

Date

## Attachment A: References

OET Bulletin 65 - Edition 97-01 - August 1997 Federal Communications Commission Office of Engineering & Technology

IEEE C95.1-2019, IEEE Standard Safety Levels With Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz IEEE-SA Standards Board

IEEE C95.3-2021, IEEE Recommended Practice for Measurements and Computations of Electric, Magnetic, and Electromagnetic Fields With Respect to Human Exposure to Such Fields, 0 Hz to 300 GHz IEEE-SA Standards Board

**Attachment B: FCC Limits for Maximum Permissible Exposure (MPE)**

**(A) Limits for Occupational/Controlled Exposure<sup>5</sup>**

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (E) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f <sup>2</sup> )*	6
30-300	61.4	0.163	1.0	6
300-1500	-	-	f/300	6
1500-100,000	-	-	5	6

**(B) Limits for General Population/Uncontrolled Exposure<sup>6</sup>**

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (E) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f <sup>2</sup> )*	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	f/1500	30
1500-100,000	-	-	1.0	30

f = frequency in MHz \* Plane-wave equivalent power density

**Table 3: FCC Limits for Maximum Permissible Exposure**

<sup>5</sup> Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

<sup>6</sup> General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.






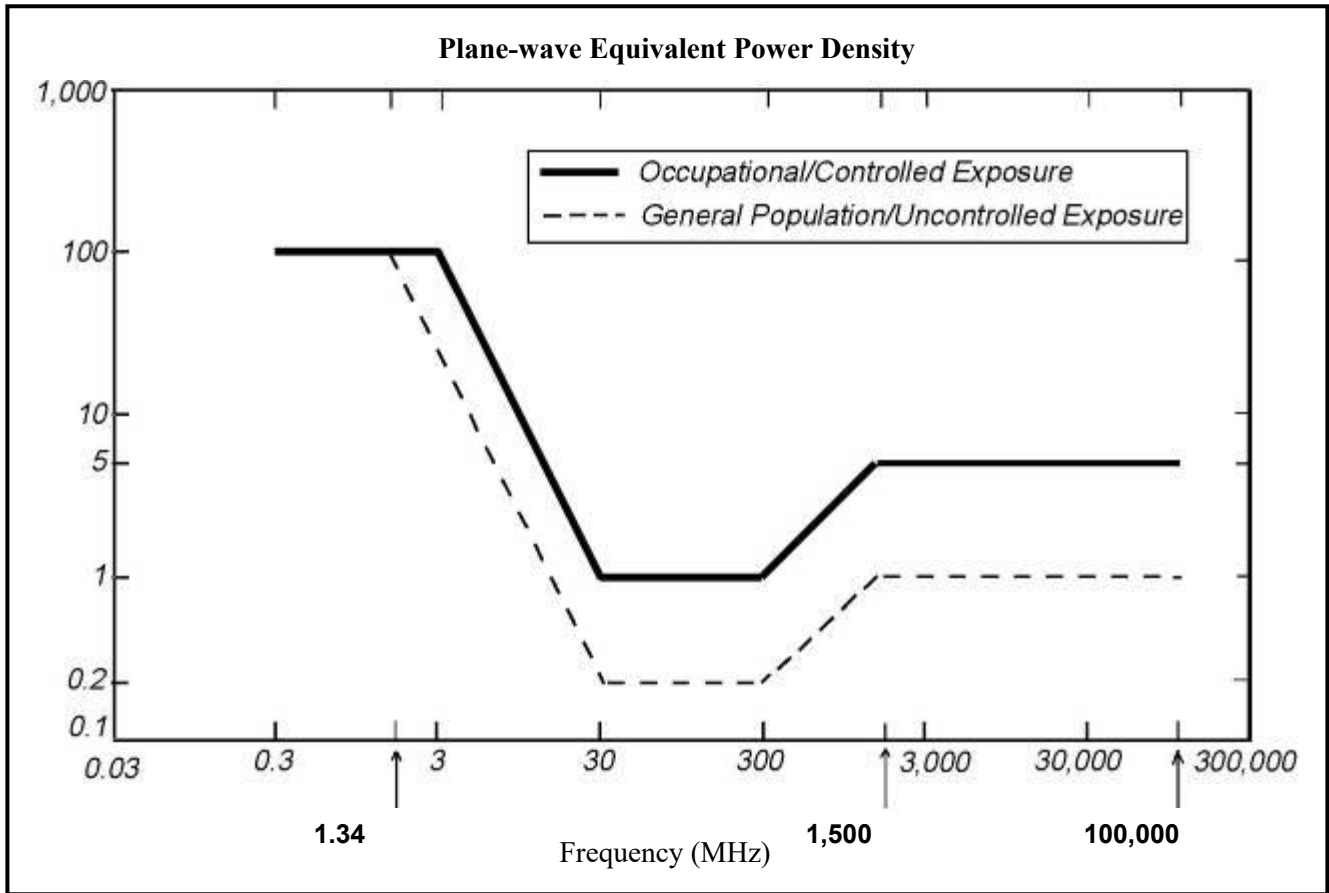



Figure 2: Graph of FCC Limits for Maximum Permissible Exposure (MPE)

### Attachment C: AT&T Antenna Model Data Sheets and Electrical Patterns

<p><b>763 MHz</b></p> <p>Manufacturer: Katherin            Model #: 840-10520            Frequency Band: 698-894 MHz            Gain: 10.8 dBi            Vertical Beamwidth: 36°            Horizontal Beamwidth: 72°            Polarization: ±45°            Size L x W x D: 23.3" x 10.6" x 6.2"</p>	
<p><b>739 MHz</b></p> <p>Manufacturer: Galtronics            Model #: GP2406-06670            Frequency Band: 698-806 MHz            Gain: 12.6 dBi            Vertical Beamwidth: 36.3°            Horizontal Beamwidth: 39.6°            Polarization: Dual slant 45° (±45°)            Size L x W x D: 23.3" x 23.3" x 6.0"</p>	
<p><b>850 MHz</b></p> <p>Manufacturer: Galtronics            Model #: GP2406-06670            Frequency Band: 806-896 MHz            Gain: 13.0 dBi            Vertical Beamwidth: 31.7°            Horizontal Beamwidth: 33.9°            Polarization: Dual slant 45° (±45°)            Size L x W x D: 23.3" x 23.3" x 6.0"</p>	

<p><b>1900 MHz</b></p> <p>Manufacturer: Galtronics            Model #: GP2406-06670            Frequency Band: 1695-2180 MHz            Gain: 15.5 dBi            Vertical Beamwidth: 37.2°            Horizontal Beamwidth: 32.4°            Polarization: Dual slant 45° (±45°)            Size L x W x D: 23.3" x 23.3" x 6.0"</p>	
<p><b>2100 MHz</b></p> <p>Manufacturer: Galtronics            Model #: GP2406-06670            Frequency Band: 1695-2180 MHz            Gain: 15.5 dBi            Vertical Beamwidth: 37.2°            Horizontal Beamwidth: 32.4°            Polarization: Dual slant 45° (±45°)            Size L x W x D: 23.3" x 23.3" x 6.0"</p>	
<p><b>3500/3700 MHz</b></p> <p>Manufacturer: ERICSSON            Model #: AIR 6472 B77G B77M            Frequency Band: 3450-3550 MHz            3840-3980 MHz            Gain: 19.1/18.9 dBi            Vertical Beamwidth: 87-105°            Horizontal Beamwidth: 60°            Polarization: N/A°            Dimensions (L x W x D): 36.3" x 15.83" x 7.4"</p>	<p>N/A</p>

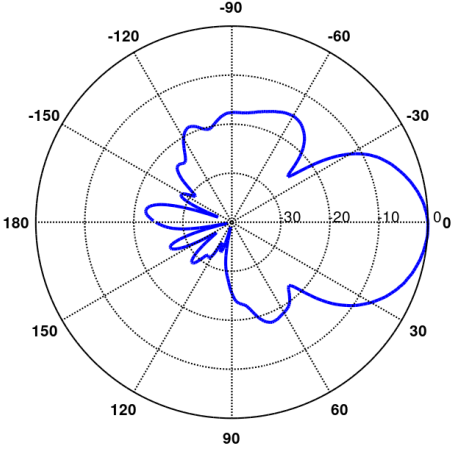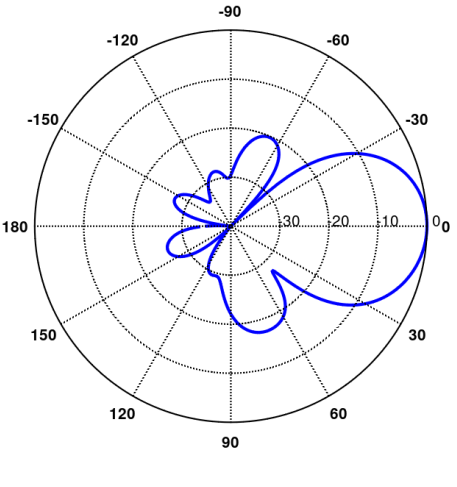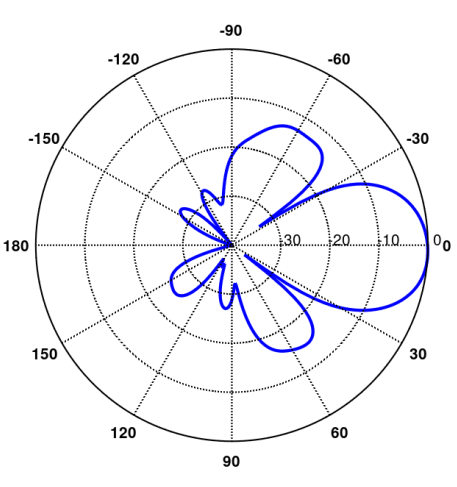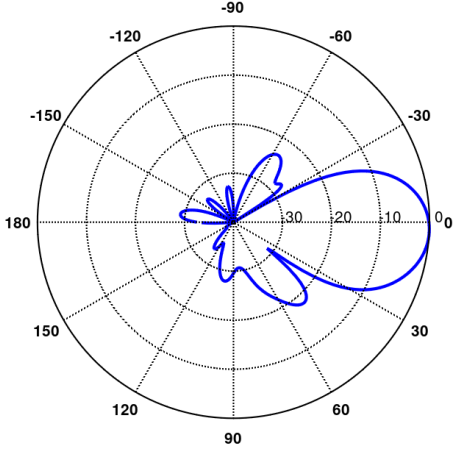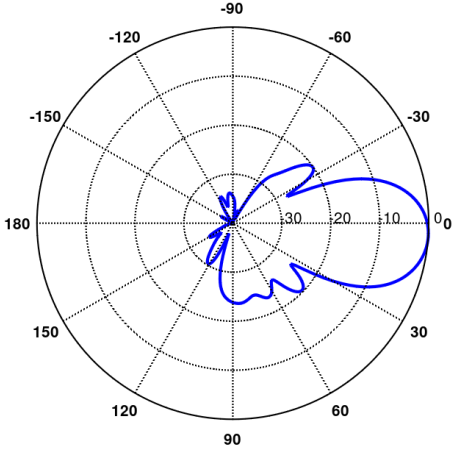

**Click-N-Ship®**

USPS.com 9405 5301 0935 5400 2674 13 0095 7001 0000 6071

US POSTAGE

U.S. POSTAGE PAID  
Click-N-Ship®

07/02/2026  
1 lb 0 oz

Mailed from 04222 839223478157173

**P**


**PRIORITY MAIL®**

QC ENTERPRISES, LLC  
MARK J ROBERTS  
5900 BALCONES DR STE 8148  
AUSTIN TX 78731-4257

Created 2026-07-02  
Flat Rate Envelope  
**RDC 03**  
**R005**


**TOWN OF SOMERS**  
MR TIM KEENEY- FIRST SELECTMAN  
CC: MS JENNIFER ROY, ZEO  
600 MAIN ST  
SOMERS CT 06071-2177

**USPS TRACKING #**



**9405 5301 0935 5400 2674 13**

CT6540 - FOUR TOMNS FAIR





Cut on dotted line.

### Instructions

1. Please use a laser or laser-quality printer.
2. Adhere shipping label to package with tape or glue - DO NOT TAPE OVER BARCODE. Be sure all edges are secure. Self-adhesive label is recommended.
3. Place label so that it does not wrap around the edge of the package.
4. Each shipping label number is unique and can be used only once - DO NOT PHOTOCOPY.
5. Please use this shipping label on the "ship date" selected when you requested the label.
6. If a mailing receipt is required, present the article and Online e-Label Record at a Post Office for postmark.

**9405 5301 0935 5400 2674 13**

Print Date: 2026-07-02	<b>PRIORITY MAIL®</b>	<b>\$9.57</b>
Ship Date: 2026-07-02	Extra Services:	<b>\$0.00</b>
	Fees:	<b>\$0.00</b>
	Total:	<b>\$9.57</b>

**From: QC ENTERPRISES LLC  
MARK J ROBERTS  
5900 BALCONES DR STE 8148  
AUSTIN TX 78731-4257**

**To: TOWN OF SOMERS  
MR TIM KEENEY- FIRST SELECTMAN  
CC: MS JENNIFER ROY, ZEO  
600 MAIN ST  
SOMERS CT 06071-2177**

\* Commercial Pricing PRIORITY MAIL® rates apply. There is no fee for USPS Tracking® service on PRIORITY MAIL® service with use of this electronic rate shipping label. Refunds for unused postage paid labels can be requested online 30 days from the print date.



Thank you for shipping with the United States Postal Service!  
Check the status of your shipment on the USPS Tracking® page at usps.com

## Delivery Status

Tracking Number

[4200607121779405530109355400267413](#)

**Out for Delivery, Expected Delivery Between 10:15am and 2:15pm**

[View Tracking History](#) ^

**2026-07-06, 6:25 AM**

Out for Delivery, Expected Delivery Between 10:15am and 2:15pm  
SOMERS, CT 06071

Your item is out for delivery on July 6, 2026 at 6:25 am in SOMERS, CT 06071.

**2026-07-06, 6:14 AM**

Arrived at Post Office  
SOMERS, CT 06071

**2026-07-05, 12:00 AM**


In Transit to Next Facility

**2026-07-04, 6:29 AM**

Departed USPS Regional Facility  
HARTFORD CT DISTRIBUTION CENTER,

**2026-07-04, 3:00 AM**

Arrived at USPS Regional Facility  
HARTFORD CT DISTRIBUTION CENTER,



**Click-N-Ship®**

usps.com 9405 5301 0935 5400 2674 06 0095 7001 0000 6071

US POSTAGE

U.S. POSTAGE PAID  
Click-N-Ship®

07/02/2026  
1 lb 0 oz

Mailed from 04222 787540680548032

**P**

**PRIORITY MAIL®**

QC ENTERPRISES LLC  
MARK J ROBERTS  
5900 BALCONES DR STE 8148  
AUSTIN TX 78731-4257



Created 2026-07-02  
Flat Rate Envelope  
**RDC 03**  
**B001**


---

CT6540 - FOUR TOWNS FAIR

9405 5301 0935 5400 2674 06

USPS TRACKING #



FOUR TOWN FAIRGROUNDS  
UNION AGRICULTURAL SOCIETY INC.  
PO BOX 24  
SOMERS CT 06071-0024



Cut on dotted line.

## Instructions

1. Please use a laser or laser-quality printer.
2. Adhere shipping label to package with tape or glue - DO NOT TAPE OVER BARCODE. Be sure all edges are secure. Self-adhesive label is recommended.
3. Place label so that it does not wrap around the edge of the package.
4. Each shipping label number is unique and can be used only once - DO NOT PHOTOCOPY.
5. Please use this shipping label on the "ship date" selected when you requested the label.
6. If a mailing receipt is required, present the article and Online e-Label Record at a Post Office for postmark.

**9405 5301 0935 5400 2674 06**

Print Date: 2026-07-02	<b>PRIORITY MAIL®</b>	<b>\$9.57</b>
Ship Date: 2026-07-02	Extra Services:	<b>\$0.00</b>
	Fees:	<b>\$0.00</b>
	Total:	<b>\$9.57</b>

**From:** QC ENTERPRISES LLC  
MARK J ROBERTS  
5900 BALCONES DR STE 8148  
AUSTIN TX 78731-4257

**To:** FOUR TOWN FAIRGROUNDS  
UNION AGRICULTURAL SOCIETY INC.  
PO BOX 24  
SOMERS CT 06071-0024

\* Commercial Pricing PRIORITY MAIL® rates apply. There is no fee for USPS Tracking® service on PRIORITY MAIL® service with use of this electronic rate shipping label. Refunds for unused postage paid labels can be requested online 30 days from the print date.



Thank you for shipping with the United States Postal Service!  
Check the status of your shipment on the USPS Tracking® page at usps.com

## Delivery Status

Tracking Number

[4200607100249405530109355400267406](#)

**In Transit to Next Facility**

[View Tracking History](#) ^

**2026-07-05, 12:00 AM**

In Transit to Next Facility

Your package is moving within the USPS network and is on track to be delivered to its final destination. It is currently in transit to the next facility.

**2026-07-03, 11:24 PM**

Departed USPS Regional Facility  
NASHUA NH DISTRIBUTION CENTER,

**2026-07-03, 1:06 AM**

Arrived at USPS Regional Origin Facility  
NASHUA NH DISTRIBUTION CENTER,

**2026-07-02, 3:32 PM**

Departed Post Office  
POWNAL, ME 04069

**2026-07-02, 3:26 PM**

USPS in possession of item  
POWNAL, ME 04069