



February 26, 2021

Melanie A. Bachman  
Executive Director  
Connecticut Siting Council  
10 Franklin Square  
New Britain, CT 06051

RE: **Notice of Exempt Modification for T-Mobile  
Crown Site ID# 828054; T-Mobile Site ID# CT11279D  
300 Governors Highway, South Windsor, CT 06074  
Latitude: 41° 50' 0.40"/ Longitude: -72° 36' 11.00"**

Dear Ms. Bachman:

T-Mobile currently maintains nine (9) antennas at the 165-foot mount on the existing 165-foot Monopole Tower located at 300 Governors Highway in South Windsor. The property is owned by Electron Technologies and the Tower is owned by Crown Castle. T-Mobile now intends to replace three (3) existing antennas and add a 6'-6''x4'-0'' ground equipment pad within the existing compound. This modification/proposal includes hardware that is both 4G(LTE) and 5G capable through remote software configuration and either or both services may be turned on or off at various times.

**Planned Modifications:**

**Tower:**

Remove and Replace:

(3) AIR21\_B2A\_B4P 1900/2100 MHz Antenna **(REMOVE)** - (3) AIR6449\_B41 5G Antenna 2500 MHz **(REPLACE)**

(1) 9x18 HCS Hybrid Cable **(REMOVE)** – (1) 6x12 HCS Hybrid Cable **(REPLACE)**

Install New:

(3) Radio 4415 B25

(3) SDX1926Q-43 Diplexers

Existing to Remain:

(3) AIR32\_B66A\_B2A Antenna 1900/2100 MHz

(3) RFDS APXVAARR24\_43-U-NA20 Antenna 600/700 MHz

**Ground:**

Install New:

- (1) 6160 cabinet
- (1) B160 Battery cabinet
- (1) BB 6630
- (1) BB 6648
- (1) PSU 4813
- (1) iXRe router
- (1) 6'-6''x4'-0'' equipment pad

Existing to Remain:

- (1) 6131 Equipment cabinet

The facility was approved by the Town of South Windsor Planning and Zoning Commission in Application No. 99-51P on September 21, 1999. This approval was given without conditions.

Please accept this letter as notification pursuant to Regulations of Connecticut State Agencies §16-50j-73, for construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-72(b)(2). In accordance with R.C.S.A. § 16-50j-73, a copy of this letter is being sent to The Honorable Andrew Paterna, Mayor of the Town of South Windsor, Michele M. Lipe, Director of Planning for the Town of South Windsor, and the property owner.

1. The proposed modifications will not result in an increase in the height of the existing tower.
2. The proposed modifications will not require the extension of the site boundary.
3. The proposed modification will not increase noise levels at the facility by six decibels or more, or to levels that exceed state and local criteria.
4. The operation of the replacement antennas will not increase radio frequency emissions at the facility to a level at or above the Federal Communication Commission safety standard.
5. The proposed modifications will not cause a change or alteration in the physical or environmental characteristics of the site.
6. The existing structure and its foundation can support the proposed loading.

For the foregoing reasons, T-Mobile respectfully submits that the proposed modifications to the above-reference telecommunications facility constitutes an exempt modification under R.C.S.A. § 16-50j-72(b)(2).

Melanie A. Bachman

Page 3

Sincerely,

A handwritten signature in cursive script, appearing to read "Richard Zajac".

Richard Zajac  
Site Acquisition Specialist  
4545 East River Road, Suite 320  
West Henrietta, NY  
(585) 445-5896  
Richard.zajac@crowncastle.com

Attachments

cc:

The Honorable Andrew Paterna, Mayor  
Town of South Windsor  
1540 Sullivan Ave  
South Windsor, CT 06074  
860-644-2511

Michele M. Lipe, Director of Planning  
Town of South Windsor  
1540 Sullivan Ave  
South Windsor, CT 06074  
860-644-2511 ext. 252

Electron Technologies  
300 Governors Highway  
South Windsor, NY 06074  
201-236-9224

ORIGIN ID: ONHA (585) 445-5896  
RICHARD ZAJAC  
CROWN CASTLE  
629 KAYLEIGH DR

SHIP DATE: 26FEB21  
ACT WGT: 1.00 LB  
CAD: 112911364/NET4340

WEBSTER, NY 14580  
UNITED STATES US

BILL SENDER


TO ELECTRON TECHNOLOGIES

300 GOVERNORS HIGHWAY

SOUTH WINDSOR CT 06074

(201) 236-9224 REF: 799001 7680

INV/ PO: DEPT:

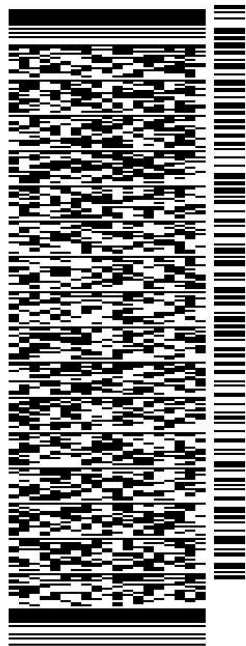


56DJ3/CB7A/FE4A

TRK# 7730 1306 7277  
0201

MON - 01 MAR 4:30P  
STANDARD OVERNIGHT

XE QCWA

06074  
CT-US BDL

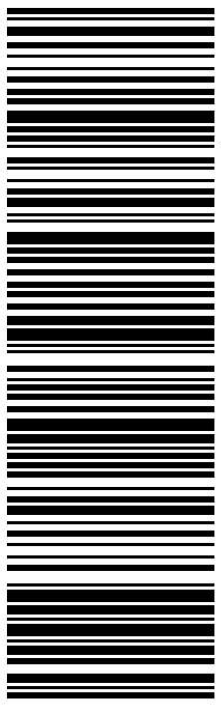

**After printing this label:**

1. Use the 'Print' button on this page to print your label to your laser or inkjet printer.
2. Fold the printed page along the horizontal line.
3. Place label in shipping pouch and affix it to your shipment so that the barcode portion of the label can be read and scanned.

**Warning:** Use only the printed original label for shipping. Using a photocopy of this label for shipping purposes is fraudulent and could result in additional billing charges, along with the cancellation of your FedEx account number.  
Use of this system constitutes your agreement to the service conditions in the current FedEx Service Guide, available on fedex.com. FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1,000, e.g. jewelry, precious metals, negotiable instruments and other items listed in our Service Guide. Written claims must be filed within strict time limits, see current FedEx Service Guide.

ORIGIN ID: ONHA (585) 445-5896  
RICHARD ZAJAC  
CROWN CASTLE  
629 KAYLEIGH DR

SHIP DATE: 26FEB21  
ACT WGT: 1.00 LB  
CAD: 112911364INET4340


WEBSTER, NY 14580  
UNITED STATES US

BILL SENDER

TO MICHELE LIPE, DIRECTOR OF PLANNING  
TOWN OF SOUTH WINDSOR  
1540 SULLIVAN AVE

SOUTH WINDSOR CT 06074

(860) 644-2511 REF: 799001 7680  
INV/ PO: DEPT:

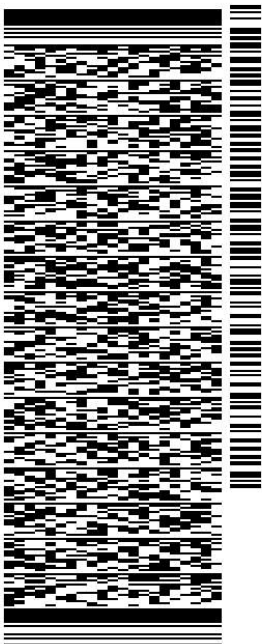

56DJ3/CB7A/FE4A

TRK# 7730 1304 9668 MON - 01 MAR 4:30P  
0201 STANDARD OVERNIGHT

XEQCWA 06074  
CT-US BDL

**After printing this label:**

1. Use the 'Print' button on this page to print your label to your laser or inkjet printer.
2. Fold the printed page along the horizontal line.
3. Place label in shipping pouch and affix it to your shipment so that the barcode portion of the label can be read and scanned.

**Warning:** Use only the printed original label for shipping. Using a photocopy of this label for shipping purposes is fraudulent and could result in additional billing charges, along with the cancellation of your FedEx account number.  
Use of this system constitutes your agreement to the service conditions in the current FedEx Service Guide, available on fedex.com. FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1,000, e.g. jewelry, precious metals, negotiable instruments and other items listed in our ServiceGuide. Written claims must be filed within strict time limits, see current FedEx Service Guide.

ORIGIN ID: ONHA (585) 445-5896

RICHARD ZAJAC  
CROWN CASTLE  
629 KAYLEIGH DR

WEBSTER, NY 14580  
UNITED STATES US


SHIP DATE: 26FEB21  
ACT WGT: 1.00 LB  
CAD: 112911364INET4340

BILL SENDER

TO **ANDREW PATERNA, MAYOR**  
**TOWN OF SOUTH WINDSOR**  
**1540 SULLIVAN AVE**

**SOUTH WINDSOR CT 06074**

(860) 644-2511 REF: 799001 7680  
INV/ PO: DEPT:

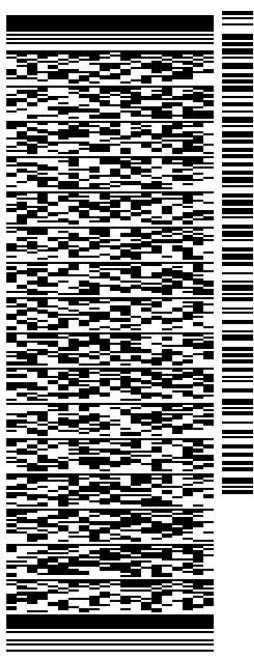

J211121011901uv


56DJ3/CB7A/FE4A

TRK# 7730 1302 5465  
0201

MON - 01 MAR 4:30P  
STANDARD OVERNIGHT

**XEQCWA**

06074  
CT-US BDL

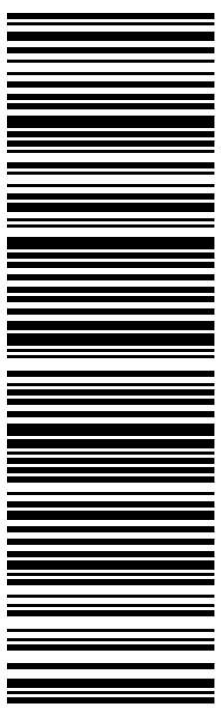

**After printing this label:**

1. Use the 'Print' button on this page to print your label to your laser or inkjet printer.
2. Fold the printed page along the horizontal line.
3. Place label in shipping pouch and affix it to your shipment so that the barcode portion of the label can be read and scanned.

**Warning:** Use only the printed original label for shipping. Using a photocopy of this label for shipping purposes is fraudulent and could result in additional billing charges, along with the cancellation of your FedEx account number.

Use of this system constitutes your agreement to the service conditions in the current FedEx Service Guide, available on fedex.com. FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1,000, e.g. jewelry, precious metals, negotiable instruments and other items listed in our ServiceGuide. Written claims must be filed within strict time limits, see current FedEx Service Guide.

# Exhibit A

## **Original Facility Approval**



# *Town of South Windsor*

1540 SULLIVAN AVENUE • SOUTH WINDSOR, CT 06074-2786

AREA CODE 860/644-2511

FAX 860/644-3781

**CERTIFIED MAIL**

September 21, 1999

Mr. Thomas M. Gilligan  
Omnipoint Communications, Inc.  
100 Filley Street  
Bloomfield, CT 06002

Dear Mr. Gilligan:

Re: Appl 99-51P, Omnipoint Communications Services

We are pleased to advise you that the Planning & Zoning Commission voted on September 14, 1999 to approve with modifications the above referenced application for a request for a Special Exception to Section XVI for the construction of a 175 ft. multi-carrier telecommunications monopole on property located at 300 Governor's Highway, I zone as shown on plans prepared by Arcnet, Job No. A 99506823A, dated 5/9/99, as revised. This approval is subject to the following modifications:

1. Prior to commencement of any site work, a meeting must be held with Town Staff.
2. No building permit will be issued until the final mylars have been filed in the Town Clerk's office.
3. An as-built plan is required prior to issuance of a Certificate of Occupancy per Section 8.1.10 of the Zoning Regulations.
4. All plans used in the field by the developer must bear the stamp and authorized signature of the Town of South Windsor.
5. Special Exception approval is granted for five years and must be renewed prior to September 14, 2004. The attached Special Exception form must be completed and filed in the Town Clerk's office. The special exception will take effect upon filing.

Black and white transparent mylars of Sheet S-1 with the above modifications, together with three blueprint copies of the entire set of plans must be submitted to this Commission within 30 days to be stamped and signed.

After the mylars have been signed by the Commission, they will be returned to you for filing in the Office of the Town Clerk. After filing these plans, a copy of the receipt must be submitted to the Planning Department.



Sincerely,

*Sue W. Larsen Idw*

Sue W. Larsen, Chairperson  
Planning and Zoning Commission

SL/dlw

Attachment

cc: Town Engineer  
Chief Building Official  
Assessor  
Superintendent of Pollution Control  
Fire Marshal

# Exhibit B

## Property Card

# 300 GOVERNORS HIGHWAY

**Location** 300 GOVERNORS HIGHWAY

**Mblu** 71/22/11

**Acct#** 36900300

**Owner** ELECTRON TECHNOLOGIES  
CORPORATIO

**Assessment** \$776,200

**Appraisal** \$1,108,900

**PID** 2698

**Building Count** 1

## Current Value

Appraisal			
Valuation Year	Improvements	Land	Total
2017	\$628,200	\$480,700	\$1,108,900

Assessment			
Valuation Year	Improvements	Land	Total
2017	\$439,700	\$336,500	\$776,200

## Owner of Record

**Owner** ELECTRON TECHNOLOGIES CORPORATIO  
**Co-Owner** P.O.BOX 316  
**Address** 300 GOVERNORS HIGHWAY  
SOUTH WINDSOR, CT 06074

**Sale Price** \$800,000  
**Certificate**  
**Book & Page** 540/ 418  
**Sale Date** 10/04/1988  
**Instrument** 00

## Ownership History

Ownership History					
Owner	Sale Price	Certificate	Book & Page	Instrument	Sale Date
ELECTRON TECHNOLOGIES CORPORATIO	\$800,000		540/ 418	00	10/04/1988

## Building Information

### Building 1 : Section 1

**Year Built:** 1965  
**Living Area:** 22,060  
**Replacement Cost:** \$960,272  
**Building Percent Good:** 63  
**Replacement Cost**  
**Less Depreciation:** \$605,000

### Building Attributes


Field	Description
STYLE	Light Industrial
MODEL	Comm/Ind
Grade	C
Stories:	1.00
Occupancy	1
Exterior Wall 1	Precast Panel
Exterior Wall 2	
Roof Structure	Flat
Roof Cover	Tar & Gravel
Interior Wall 1	Minimum
Interior Wall 2	Drywall
Interior Floor 1	Concrete
Interior Floor 2	Carpet
Heating Fuel	Gas
Heating Type	Forced Hot Air
% Central Air	100
Foundation	Poured Conc
Bldg Use	Industrial
Total Rooms	0
Total Bedrms	0
Total Fixtures	12
% Wet Sprinkler	
% Dry Sprinkler	
1st Floor Use	
Heat/AC	HEAT/AC SPLIT
Frame Type	MASONRY
Baths/Plumbing	AVERAGE
% Finished	25
Class	C
Wall Height	16

### Building Photo



(<http://images.vgsi.com/photos/SouthWindsorCTPhotos/\00\00\19\99.JPG>)

### Building Layout

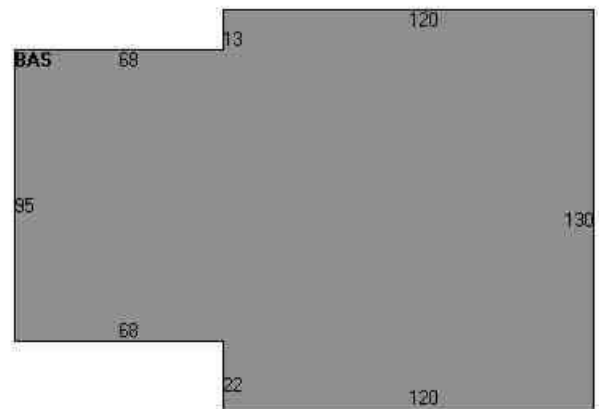

([http://images.vgsi.com/photos/SouthWindsorCTPhotos/Sketches/2698\\_21](http://images.vgsi.com/photos/SouthWindsorCTPhotos/Sketches/2698_21))

Building Sub-Areas (sq ft)			Legend
Code	Description	Gross Area	Living Area
BAS	First Floor	22,060	22,060
		22,060	22,060

### Extra Features

Extra Features	Legend
No Data for Extra Features	

### Land

### Land Use

### Land Line Valuation

<b>Use Code</b>	301	<b>Size (Acres)</b>	6.03
<b>Description</b>	Industrial	<b>Frontage</b>	0
<b>Zone</b>	I	<b>Depth</b>	0
<b>Neighborhood</b>	C400	<b>Assessed Value</b>	\$336,500
<b>Alt Land Appr Category</b>	No	<b>Appraised Value</b>	\$480,700


### Outbuildings

Outbuildings						Legend
Code	Description	Sub Code	Sub Description	Size	Value	Bldg #
PAV1	Paving	AS	Asphalt	36700 S.F.	\$19,300	1
FN1	Fence			1080 L.F.	\$3,200	1
LT1	Lights			1 UNITS	\$700	1

### Valuation History

Appraisal			
Valuation Year	Improvements	Land	Total
2019	\$628,200	\$480,700	\$1,108,900
2018	\$628,200	\$480,700	\$1,108,900
2017	\$628,200	\$480,700	\$1,108,900

Assessment			
Valuation Year	Improvements	Land	Total
2019	\$439,700	\$336,500	\$776,200
2018	\$439,700	\$336,500	\$776,200
2017	\$439,700	\$336,500	\$776,200

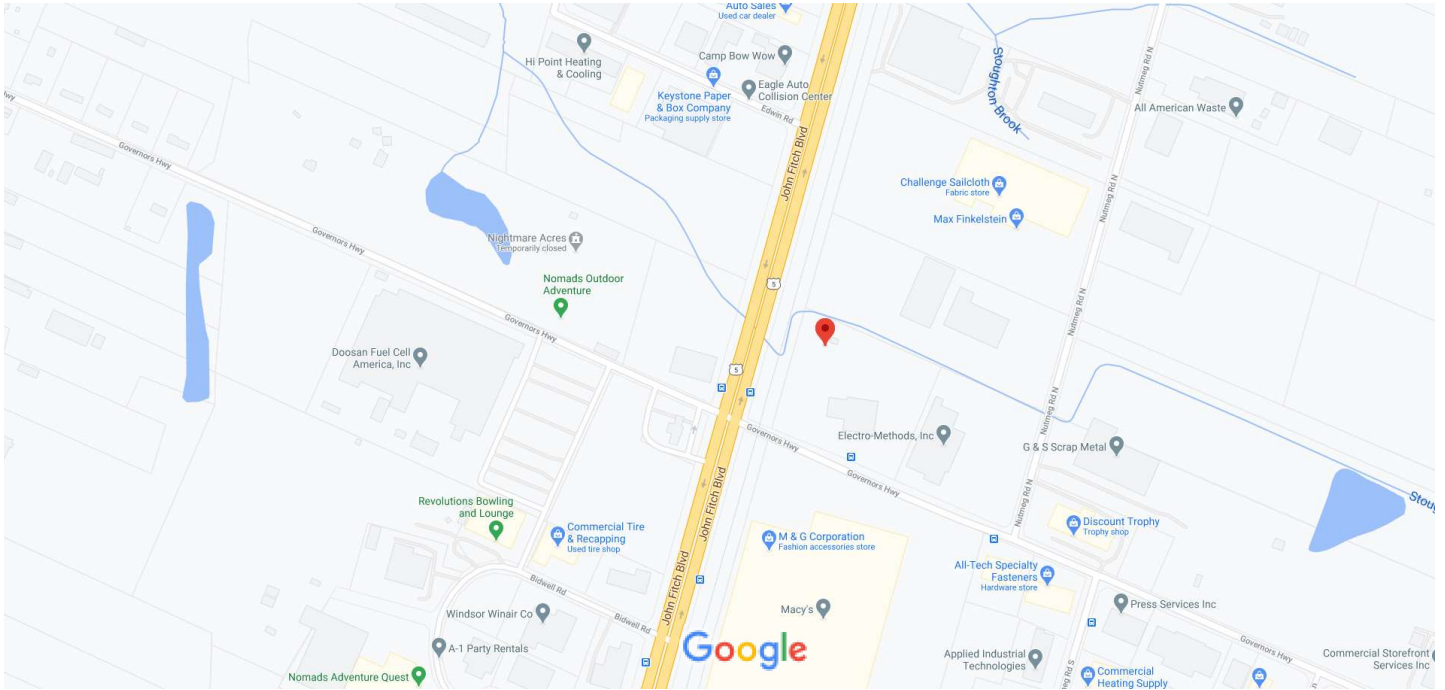







Map data ©2021 Google 200 ft




41°50'00.4"N 72°36'11.0"W

41.833444, -72.603056

-  Directions
-  Save
-  Nearby
-  Send to your phone
-  Share

 South Windsor School District, South Windsor, CT

 R9MW+9Q South Windsor, Connecticut

# Exhibit C

## **Construction Drawings**

# T-Mobile

**T-MOBILE SITE NUMBER:** CT11279D  
**T-MOBILE SITE NAME:** SOUTH WINDSOR/RT 5  
**SITE TYPE:** MONOPOLE  
**TOWER HEIGHT:** 165'-0"

**BUSINESS UNIT #:** 828054  
**SITE ADDRESS:** 300 GOVERNORS HIGHWAY  
 SOUTH WINDOR, CT 06074  
**COUNTY:** HARTFORD  
**JURISDICTION:** TBD

**T-MOBILE ANCHOR SITE CONFIGURATION:** 67D5997DB\_2xAIR+1OP

T-Mobile  
 35 GRIFFIN ROAD  
 BLOOMFIELD, CT 06002

CROWN CASTLE  
 3 CORPORATE PARK DRIVE, SUITE 101  
 CLIFTON PARK, NY 12065

INFINIGY  
 FROM ZERO TO INFINIGY  
 the solutions are endless  
 1033 Watervliet Shaker Rd | Albany, NY 12205  
 Phone: 518-690-0790 | Fax: 518-690-0793  
 www.infinigy.com

T-MOBILE SITE NUMBER:  
 CT11279D

BU #: 828054  
 SOUTH WINDOR/RT 5

300 GOVERNORS HIGHWAY  
 SOUTH WINDSOR, CT 06074

EXISTING 165' MONOPOLE

**ISSUED FOR:**

REV	DATE	DRWN	DESCRIPTION	DES/QA
0	12/03/20	BMM	FINAL	SS
1	01/20/21	BMM	GROUND AREA ADD	SS
2	01/26/21	SS	GROUND AREA REV	SS

**SITE INFORMATION**

CROWN CASTLE USA INC. SOUTH WINDSOR/RT 5  
 SITE NAME:  
 SITE ADDRESS: 300 GOVERNORS HIGHWAY  
 SOUTH WINDSOR, CT 06074  
 COUNTY: HARTFORD  
 MAP/PARCEL #: TBD  
 AREA OF CONSTRUCTION: EXISTING  
 LATITUDE: 41° 50' 00.47" N  
 LONGITUDE: 72° 36' 10.99" W  
 LAT/LONG TYPE: NAD83  
 GROUND ELEVATION: 74.0 FT  
 CURRENT ZONING: TBD  
 JURISDICTION: TBD  
 OCCUPANCY CLASSIFICATION: U  
 TYPE OF CONSTRUCTION: IIB  
 A.D.A. COMPLIANCE: FACILITY IS UNMANNED AND NOT FOR  
 HUMAN HABITATION  
 PROPERTY OWNER: TBD  
 TOWER OWNER: CROWN CASTLE  
 2000 CORPORATE DRIVE  
 CANONSBURG, PA 15317  
 CARRIER/APPLICANT: T-MOBILE  
 35 GRIFFIN ROAD  
 BLOOMFIELD, CT 06002  
 ELECTRIC PROVIDER: TBD  
 TELCO PROVIDER: TBD

**DRAWING INDEX**

SHEET #	SHEET DESCRIPTION
T-1	TITLE SHEET
T-2	GENERAL NOTES
C-1	SITE PLAN & ENLARGED SITE PLAN
C-2	FINAL ELEVATION & ANTENNA PLANS
C-3	ANTENNA & CABLE SCHEDULE
C-4	PLUMBING DIAGRAM
C-5	EQUIPMENT SPECS
E-1	AC PANEL SCHEDULES & ONE LINE DIAGRAM
G-1	ANTENNA GROUNDING DIAGRAM
G-2	GROUNDING DETAILS

ALL DRAWINGS CONTAINED HEREIN ARE FORMATTED FOR  
 ----. CONTRACTOR SHALL VERIFY ALL PLANS AND EXISTING  
 DIMENSIONS AND CONDITIONS ON THE JOB SITE AND SHALL  
 IMMEDIATELY NOTIFY THE ENGINEER IN WRITING OF ANY  
 DISCREPANCIES BEFORE PROCEEDING WITH THE WORK OR  
 BE RESPONSIBLE FOR SAME.

**PROJECT DESCRIPTION**


THE PURPOSE OF THIS PROJECT IS TO ENHANCE  
 BROADBAND CONNECTIVITY AND CAPACITY TO THE  
 EXISTING ELIGIBLE WIRELESS FACILITY.

- TOWER SCOPE OF WORK:
- REMOVE (3) ANTENNAS
  - REMOVE (4) COAX CABLES
  - REMOVE (1) HYBRID CABLE
  - INSTALL (3) ANTENNAS
  - INSTALL (3) RRHs
  - INSTALL (3) DIPLEXERS
  - INSTALL (1) HYBRID CABLE

- GROUND SCOPE OF WORK:
- INSTALL (1) 6160 & (1) B160 BATTERY CABINETS
  - INSTALL (1) iXRe ROUTER IN (P) CABINET
  - INSTALL (1) PSU4813 BOOSTER IN (P) CABINET
  - INSTALL (1) BB6630 IN (P) CABINET
  - INSTALL (1) BB6648 IN (P) CABINET
  - INSTALL (1) 6'-6"X4'-0" CONCRETE PAD

NOTE:  
 THE POWER DESIGN FOR ANY AC ELECTRICAL POWER  
 CHANGES IS TO BE PERFORMED BY OTHERS AND IS SHOWN  
 HERE FOR REFERENCE PURPOSES ONLY. T-MOBILE IS  
 SOLELY RESPONSIBLE FOR THE ELECTRICAL POWER DESIGN.

**LOCATION MAP**

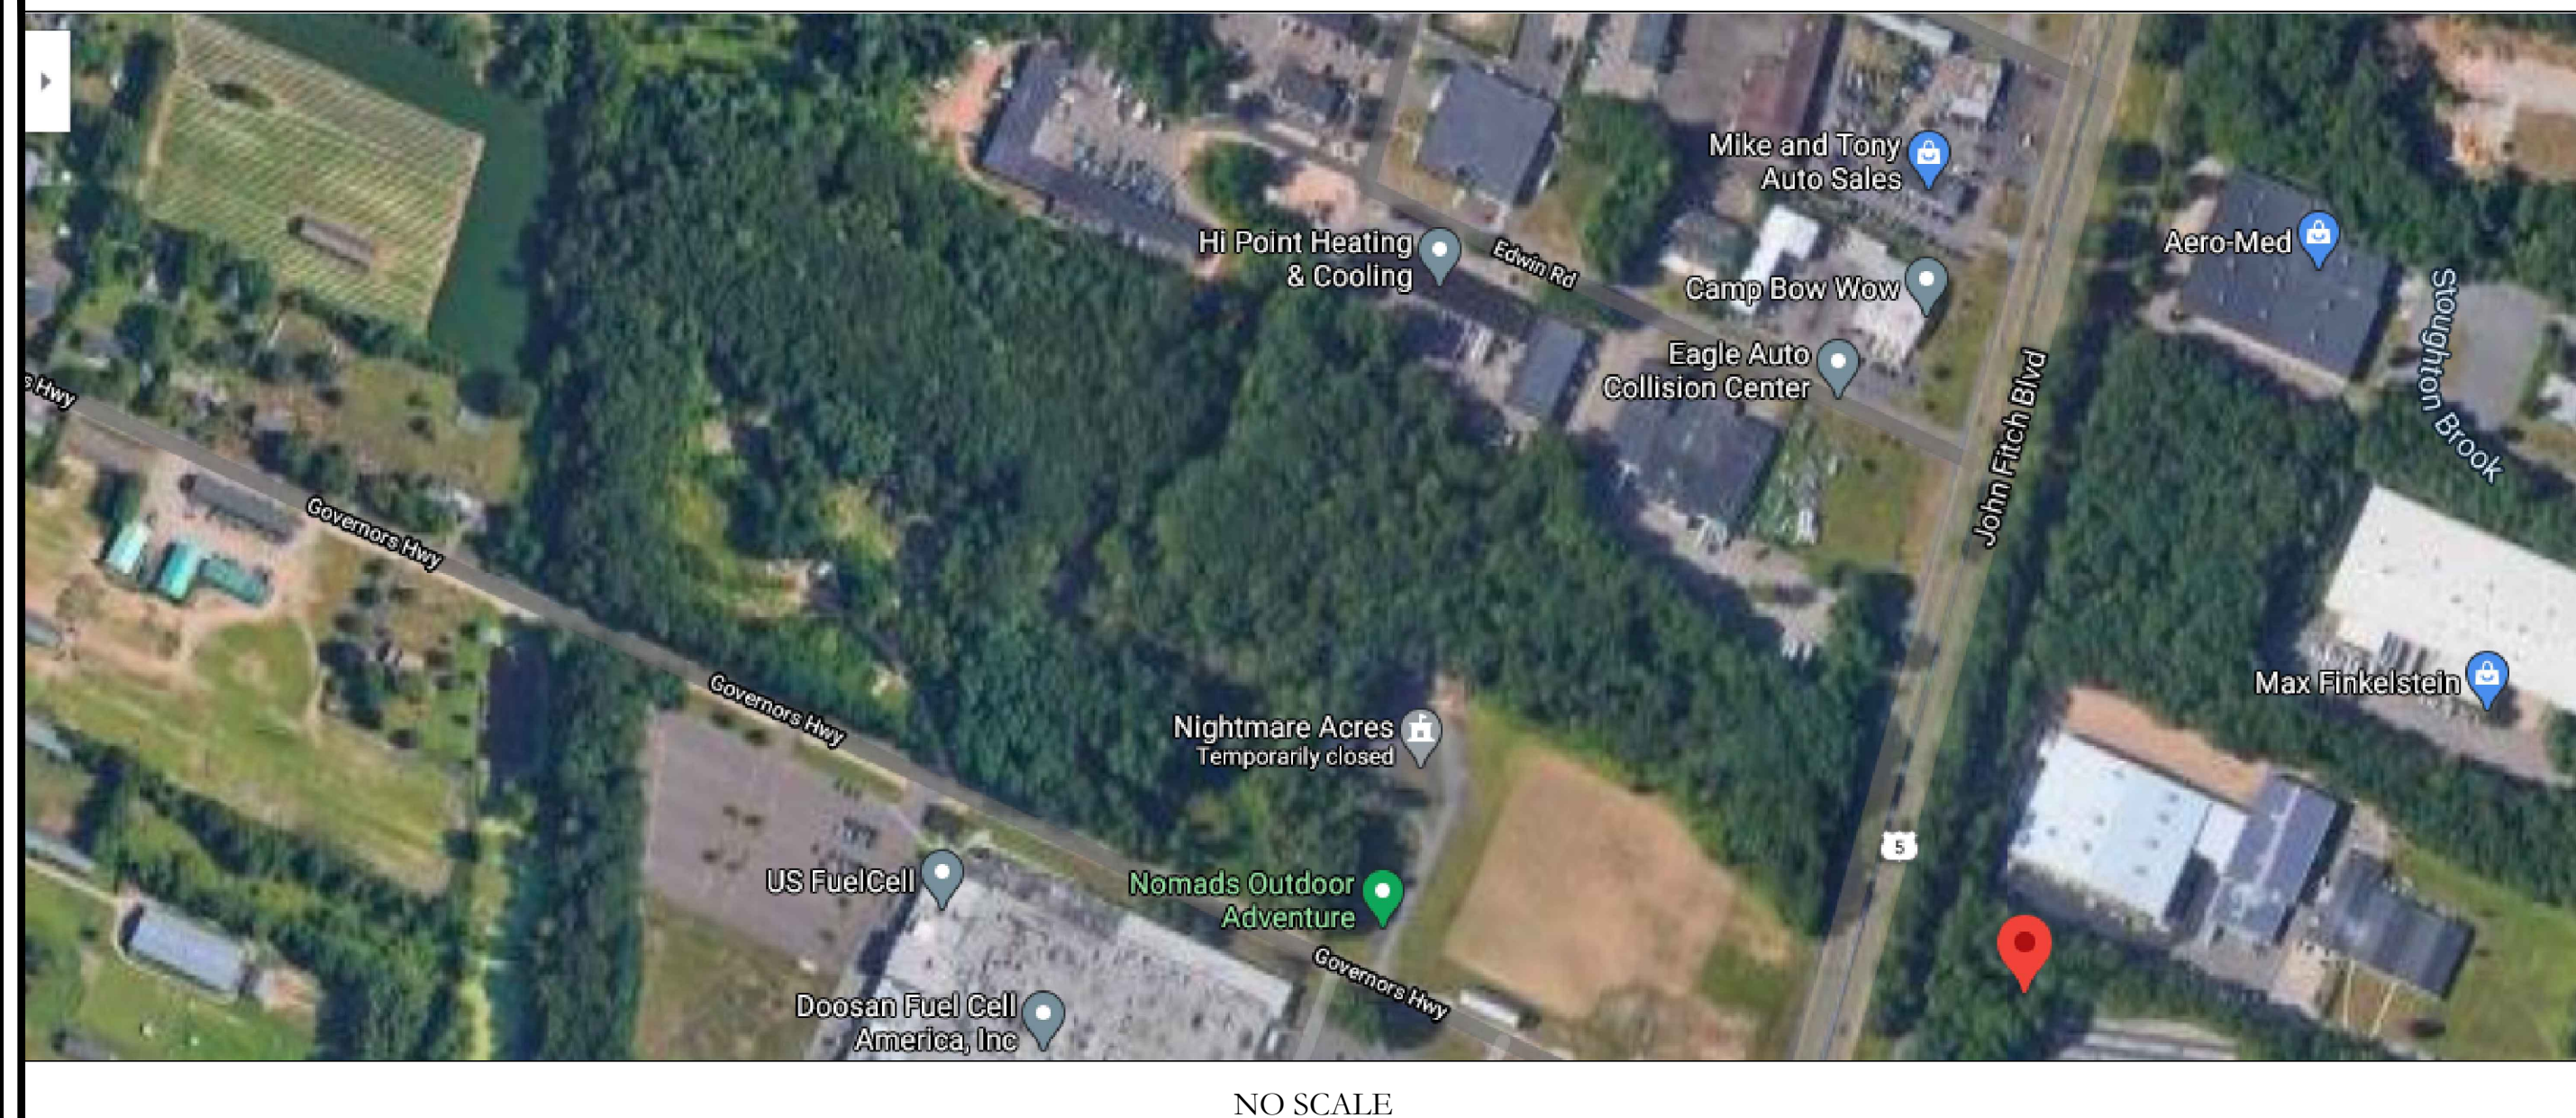


**APPLICABLE CODES/REFERENCE DOCUMENTS**

ALL WORK SHALL BE PERFORMED AND MATERIALS INSTALLED IN ACCORDANCE  
 WITH THE CURRENT EDITIONS OF THE FOLLOWING CODES AS ADOPTED BY  
 THE LOCAL GOVERNING AUTHORITIES. NOTHING IN THESE PLANS IS TO BE  
 CONSTRUED TO PERMIT WORK NOT CONFORMING TO THESE CODES:

CODE TYPE	CODE
BUILDING	2018 CT STATE BUILDING CODE
MECHANICAL	2015 IMC
ELECTRICAL	2017 NEC

**REFERENCE DOCUMENTS:**

STRUCTURAL ANALYSIS: BY OTHERS  
 DATED:  
 MOUNT ANALYSIS: INFINIGY  
 DATED: 10/09/2020  
 AC ELECTRICAL POWER DESIGN: BY OTHERS  
 DATED:  
 RFDS REVISION: 5  
 DATED: 09/23/2020  
 ORDER ID: 529720  
 REVISION: 0




**APPROVALS**

APPROVAL	SIGNATURE	DATE
PROPERTY OWNER OR REP.	_____	_____
LAND USE PLANNER	_____	_____
T-MOBILE	_____	_____
OPERATIONS	_____	_____
RF	_____	_____
NETWORK	_____	_____
BACKHAUL	_____	_____
CONSTRUCTION MANAGER	_____	_____

THE PARTIES ABOVE HEREBY APPROVE AND ACCEPT THESE DOCUMENTS  
 AND AUTHORIZE THE CONTRACTOR TO PROCEED WITH THE  
 CONSTRUCTION DESCRIBED HEREIN. ALL CONSTRUCTION DOCUMENTS  
 ARE SUBJECT TO REVIEW BY THE LOCAL BUILDING DEPARTMENT AND  
 ANY CHANGES AND MODIFICATIONS THEY MAY IMPOSE.

**PROJECT TEAM**

A&E FIRM: INFINIGY  
 1033 WATERVLIET SHAKER RD.  
 ALBANY, NY 12205  
 CROWN CASTLE USA INC. DISTRICT CONTACTS:  
 3 CORPORATE PARK DRIVE, SUITE 101  
 CLIFTON PARK, NY 12065  
 ---- - PROJECT MANAGER  
 ----  
 ---- - CONSTRUCTION MANAGER  
 ----

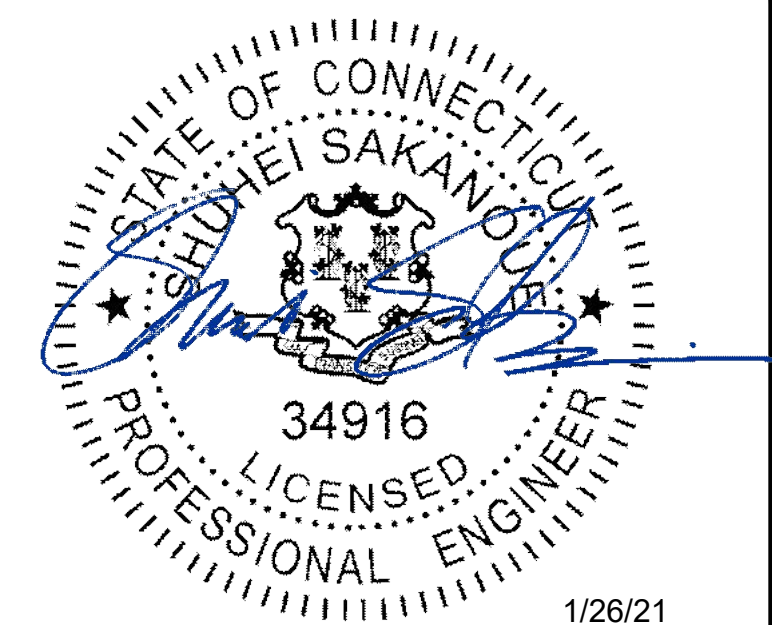

IT IS A VIOLATION OF LAW FOR ANY PERSON,  
 UNLESS THEY ARE ACTING UNDER THE DIRECTION  
 OF A LICENSED PROFESSIONAL ENGINEER,  
 TO ALTER THIS DOCUMENT.

SHEET NUMBER: **T-1** REVISION: **1**

NOTE:  
 PRIOR TO ACCESSING/ENTERING THE SITE YOU MUST CONTACT THE  
 CROWN NOC AT (800) 788-7011 & CROWN CONSTRUCTION MANAGER.



**CROWN CASTLE USA INC. SITE ACTIVITY REQUIREMENTS:**

- NOTICE TO PROCEED- NO WORK SHALL COMMENCE PRIOR TO CROWN CASTLE USA INC. WRITTEN NOTICE TO PROCEED (NTP) AND THE ISSUANCE OF A PURCHASE ORDER. PRIOR TO ACCESSING/ENTERING THE SITE YOU MUST CONTACT THE CROWN CASTLE USA INC. NOC AT 800-788-7011 & THE CROWN CASTLE USA INC. CONSTRUCTION MANAGER.
- "LOOK UP" - CROWN CASTLE USA INC. SAFETY CLIMB REQUIREMENT: THE INTEGRITY OF THE SAFETY CLIMB AND ALL COMPONENTS OF THE CLIMBING FACILITY SHALL BE CONSIDERED DURING ALL STAGES OF DESIGN, INSTALLATION, AND INSPECTION. TOWER MODIFICATION, MOUNT REINFORCEMENTS, AND/OR EQUIPMENT INSTALLATIONS SHALL NOT COMPROMISE THE INTEGRITY OR FUNCTIONAL USE OF THE SAFETY CLIMB OR ANY COMPONENTS OF THE CLIMBING FACILITY ON THE STRUCTURE. THIS SHALL INCLUDE, BUT NOT BE LIMITED TO: PINCHING OF THE WIRE ROPE, BENDING OF THE WIRE ROPE FROM ITS SUPPORTS, DIRECT CONTACT OR CLOSE PROXIMITY TO THE WIRE ROPE WHICH MAY CAUSE FRICTIONAL WEAR, IMPACT TO THE ANCHORAGE POINTS IN ANY WAY, OR TO IMPEDE/BLOCK ITS INTENDED USE. ANY COMPROMISED SAFETY CLIMB, INCLUDING EXISTING CONDITIONS MUST BE TAGGED OUT AND REPORTED TO YOUR CROWN CASTLE USA INC. POC OR CALL THE NOC TO GENERATE A SAFETY CLIMB MAINTENANCE AND CONTRACTOR NOTICE TICKET.
- PRIOR TO THE START OF CONSTRUCTION, ALL REQUIRED JURISDICTIONAL PERMITS SHALL BE OBTAINED. THIS INCLUDES, BUT IS NOT LIMITED TO, BUILDING, ELECTRICAL, MECHANICAL, FIRE, FLOOD ZONE, ENVIRONMENTAL, AND ZONING. AFTER ONSITE ACTIVITIES AND CONSTRUCTION ARE COMPLETED, ALL REQUIRED PERMITS SHALL BE SATISFIED AND CLOSED OUT ACCORDING TO LOCAL JURISDICTIONAL REQUIREMENTS.
- ALL CONSTRUCTION MEANS AND METHODS; INCLUDING BUT NOT LIMITED TO, ERECTION PLANS, RIGGING PLANS, CLIMBING PLANS, AND RESCUE PLANS SHALL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR RESPONSIBLE FOR THE EXECUTION OF THE WORK CONTAINED HEREIN, AND SHALL MEET ANSI/ASSE A10.48 (LATEST EDITION); FEDERAL, STATE, AND LOCAL REGULATIONS; AND ANY APPLICABLE INDUSTRY CONSENSUS STANDARDS RELATED TO THE CONSTRUCTION ACTIVITIES BEING PERFORMED. ALL RIGGING PLANS SHALL ADHERE TO ANSI/ASSE A10.48 (LATEST EDITION) AND CROWN CASTLE USA INC. STANDARD CED-STD-10253, INCLUDING THE REQUIRED INVOLVEMENT OF A QUALIFIED ENGINEER FOR CLASS IV CONSTRUCTION, TO CERTIFY THE SUPPORTING STRUCTURE(S) IN ACCORDANCE WITH ANSI/TIA-322 (LATEST EDITION).
- ALL SITE WORK TO COMPLY WITH QAS-STD-10068 "INSTALLATION STANDARDS FOR CONSTRUCTION ACTIVITIES ON CROWN CASTLE USA INC. TOWER SITE," CED-STD-10294 "STANDARD FOR INSTALLATION OF MOUNTS AND APPURTENANCES," AND LATEST VERSION OF ANSI/TIA-1019-A-2012 "STANDARD FOR INSTALLATION, ALTERATION, AND MAINTENANCE OF ANTENNA SUPPORTING STRUCTURES AND ANTENNAS." IF THE SPECIFIED EQUIPMENT CAN NOT BE INSTALLED AS SHOWN ON THESE DRAWINGS, THE CONTRACTOR SHALL PROPOSE AN ALTERNATIVE INSTALLATION FOR APPROVAL BY CROWN CASTLE USA INC. PRIOR TO PROCEEDING WITH ANY SUCH CHANGE OF INSTALLATION.
- ALL MATERIALS FURNISHED AND INSTALLED SHALL BE IN STRICT ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS AND ORDINANCES. CONTRACTOR SHALL ISSUE ALL APPROPRIATE NOTICES AND COMPLY WITH ALL LAWS, ORDINANCES, RULES, REGULATIONS AND LAWFUL ORDERS OF ANY PUBLIC AUTHORITY REGARDING THE PERFORMANCE OF THE WORK. ALL WORK CARRIED OUT SHALL COMPLY WITH ALL APPLICABLE MUNICIPAL AND UTILITY COMPANY SPECIFICATIONS AND LOCAL JURISDICTIONAL CODES, ORDINANCES AND APPLICABLE REGULATIONS.
- THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT AND MATERIALS IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS UNLESS SPECIFICALLY STATED OTHERWISE.
- THE CONTRACTOR SHALL CONTACT UTILITY LOCATING SERVICES PRIOR TO THE START OF CONSTRUCTION.
- ALL EXISTING ACTIVE SEWER, WATER, GAS, ELECTRIC AND OTHER UTILITIES WHERE ENCOUNTERED IN THE WORK, SHALL BE PROTECTED AT ALL TIMES AND WHERE REQUIRED FOR THE PROPER EXECUTION OF THE WORK, SHALL BE RELOCATED AS DIRECTED BY CONTRACTOR. EXTREME CAUTION SHOULD BE USED BY THE CONTRACTOR WHEN EXCAVATING OR DRILLING PIERS AROUND OR NEAR UTILITIES. CONTRACTOR SHALL PROVIDE SAFETY TRAINING FOR THE WORKING CREW. THIS WILL INCLUDE BUT NOT BE LIMITED TO A) FALL PROTECTION B) CONFINED SPACE C) ELECTRICAL SAFETY D) TRENCHING AND EXCAVATION E) CONSTRUCTION SAFETY PROCEDURES.
- ALL SITE WORK SHALL BE AS INDICATED ON THE STAMPED CONSTRUCTION DRAWINGS AND PROJECT SPECIFICATIONS. LATEST APPROVED REVISION.
- CONTRACTOR SHALL KEEP THE SITE FREE FROM ACCUMULATING WASTE MATERIAL, DEBRIS, AND TRASH AT THE COMPLETION OF THE WORK. IF NECESSARY, RUBBISH, STUMPS, DEBRIS, STICKS, STONES AND OTHER REFUSE SHALL BE REMOVED FROM THE SITE AND DISPOSED OF LEGALLY.
- ALL EXISTING INACTIVE SEWER, WATER, GAS, ELECTRIC AND OTHER UTILITIES, WHICH INTERFERE WITH THE EXECUTION OF THE WORK, SHALL BE REMOVED AND/OR CAPPED, PLUGGED OR OTHERWISE DISCONTINUED AT POINTS WHICH WILL NOT INTERFERE WITH THE EXECUTION OF THE WORK, SUBJECT TO THE APPROVAL OF CONTRACTOR, TOWER OWNER, CROWN CASTLE USA INC., AND/OR LOCAL UTILITIES.
- THE CONTRACTOR SHALL PROVIDE SITE SIGNAGE IN ACCORDANCE WITH THE TECHNICAL SPECIFICATION FOR SITE SIGNAGE REQUIRED BY LOCAL JURISDICTION AND SIGNAGE REQUIRED ON INDIVIDUAL PIECES OF EQUIPMENT, ROOMS, AND SHELTERS.
- THE SITE SHALL BE GRADED TO CAUSE SURFACE WATER TO FLOW AWAY FROM THE CARRIER'S EQUIPMENT AND TOWER AREAS.
- THE SUB GRADE SHALL BE COMPACTED AND BROUGHT TO A SMOOTH UNIFORM GRADE PRIOR TO FINISHED SURFACE APPLICATION.
- THE AREAS OF THE OWNERS PROPERTY DISTURBED BY THE WORK AND NOT COVERED BY THE TOWER, EQUIPMENT OR DRIVEWAY, SHALL BE GRADED TO A UNIFORM SLOPE, AND STABILIZED TO PREVENT EROSION AS SPECIFIED ON THE CONSTRUCTION DRAWINGS AND/OR PROJECT SPECIFICATIONS.
- CONTRACTOR SHALL MINIMIZE DISTURBANCE TO EXISTING SITE DURING CONSTRUCTION. EROSION CONTROL MEASURES, IF REQUIRED DURING CONSTRUCTION, SHALL BE IN CONFORMANCE WITH THE LOCAL GUIDELINES FOR EROSION AND SEDIMENT CONTROL.
- THE CONTRACTOR SHALL PROTECT EXISTING IMPROVEMENTS, PAVEMENTS, CURBS, LANDSCAPING AND STRUCTURES. ANY DAMAGED PART SHALL BE REPAIRED AT CONTRACTOR'S EXPENSE TO THE SATISFACTION OF OWNER.
- CONTRACTOR SHALL LEGALLY AND PROPERLY DISPOSE OF ALL SCRAP MATERIALS SUCH AS COAXIAL CABLES AND OTHER ITEMS REMOVED FROM THE EXISTING FACILITY. ANTENNAS REMOVED SHALL BE RETURNED TO THE OWNER'S DESIGNATED LOCATION.
- CONTRACTOR SHALL LEAVE PREMISES IN CLEAN CONDITION. TRASH AND DEBRIS SHOULD BE REMOVED FROM SITE ON A DAILY BASIS.
- NO FILL OR EMBANKMENT MATERIAL SHALL BE PLACED ON FROZEN GROUND. FROZEN MATERIALS, SNOW OR ICE SHALL NOT BE PLACED IN ANY FILL OR EMBANKMENT.

**GREENFIELD GROUNDING NOTES:**

- ALL GROUND ELECTRODE SYSTEMS (INCLUDING TELECOMMUNICATION, RADIO, LIGHTNING PROTECTION AND AC POWER GES'S) SHALL BE BONDED TOGETHER AT OR BELOW GRADE, BY TWO OR MORE COPPER BONDING CONDUCTORS IN ACCORDANCE WITH THE NEC.
- THE CONTRACTOR SHALL PERFORM IEEE FALL-OFF-POTENTIAL RESISTANCE TO EARTH TESTING (PER IEEE 1100 AND 81) FOR GROUND ELECTRODE SYSTEMS, THE CONTRACTOR SHALL FURNISH AND INSTALL SUPPLEMENTAL GROUND ELECTRODES AS NEEDED TO ACHIEVE A TEST RESULT OF 5 OHMS OR LESS.
- THE CONTRACTOR IS RESPONSIBLE FOR PROPERLY SEQUENCING GROUNDING AND UNDERGROUND CONDUIT INSTALLATION AS TO PREVENT ANY LOSS OF CONTINUITY IN THE GROUNDING SYSTEM OR DAMAGE TO THE CONDUIT AND PROVIDE TESTING RESULTS.
- METAL CONDUIT AND TRAY SHALL BE GROUNDED AND MADE ELECTRICALLY CONTINUOUS WITH LISTED BONDING FITTINGS OR BY BONDING ACROSS THE DISCONTINUITY WITH #6 COPPER WIRE UL APPROVED GROUNDING TYPE CONDUIT CLAMPS.
- METAL RACEWAY SHALL NOT BE USED AS THE NEC REQUIRED EQUIPMENT GROUND CONDUCTOR. STRANDED COPPER CONDUCTORS WITH GREEN INSULATION, SIZED IN ACCORDANCE WITH THE NEC, SHALL BE FURNISHED AND INSTALLED WITH THE POWER CIRCUITS TO BTS EQUIPMENT.
- EACH CABINET FRAME SHALL BE DIRECTLY CONNECTED TO THE MASTER GROUND BAR WITH GREEN INSULATED SUPPLEMENTAL EQUIPMENT GROUND WIRES, #6 STRANDED COPPER OR LARGER FOR INDOOR BTS; #2 BARE SOLID TINNED COPPER FOR OUTDOOR BTS.
- CONNECTIONS TO THE GROUND BUS SHALL NOT BE DOUBLED UP OR STACKED BACK TO BACK CONNECTIONS ON OPPOSITE SIDE OF THE GROUND BUS ARE PERMITTED.
- ALL EXTERIOR GROUND CONDUCTORS BETWEEN EQUIPMENT/GROUND BARS AND THE GROUND RING SHALL BE #2 SOLID TINNED COPPER UNLESS OTHERWISE INDICATED.
- ALUMINUM CONDUCTOR OR COPPER CLAD STEEL CONDUCTOR SHALL NOT BE USED FOR GROUNDING CONNECTIONS.
- USE OF 90° BENDS IN THE PROTECTION GROUNDING CONDUCTORS SHALL BE AVOIDED WHEN 45° BENDS CAN BE ADEQUATELY SUPPORTED.
- EXOTHERMIC WELDS SHALL BE USED FOR ALL GROUNDING CONNECTIONS BELOW GRADE.
- ALL GROUND CONNECTIONS ABOVE GRADE (INTERIOR AND EXTERIOR) SHALL BE FORMED USING HIGH PRESS CRIMPS.
- COMPRESSION GROUND CONNECTIONS MAY BE REPLACED BY EXOTHERMIC WELD CONNECTIONS.
- ICE BRIDGE BONDING CONDUCTORS SHALL BE EXOTHERMICALLY BONDED OR BOLTED TO THE BRIDGE AND THE TOWER GROUND BAR.
- APPROVED ANTI-OXIDANT COATINGS (i.e. CONDUCTIVE GEL OR PASTE) SHALL BE USED ON ALL COMPRESSION AND BOLTED GROUND CONNECTIONS.
- ALL EXTERIOR GROUND CONNECTIONS SHALL BE COATED WITH A CORROSION RESISTANT MATERIAL.
- MISCELLANEOUS ELECTRICAL AND NON-ELECTRICAL METAL BOXES, FRAMES AND SUPPORTS SHALL BE BONDED TO THE GROUND RING, IN ACCORDANCE WITH THE NEC.
- BOND ALL METALLIC OBJECTS WITHIN 6 FT. OF MAIN GROUND RING WITH (1) #2 BARE SOLID TINNED COPPER GROUND CONDUCTOR.
- GROUND CONDUCTORS USED FOR THE FACILITY GROUNDING AND LIGHTNING PROTECTION SYSTEMS SHALL NOT BE ROUTED THROUGH METALLIC OBJECTS THAT FORM A RING AROUND THE CONDUCTOR, SUCH AS METALLIC CONDUITS, METAL SUPPORT CLIPS OR SLEEVES THROUGH WALLS OR FLOORS. WHEN IT IS REQUIRED TO BE HOUSED IN CONDUIT TO MEET CODE REQUIREMENTS OR LOCAL CONDITIONS, NON-METALLIC MATERIAL SUCH AS PVC CONDUIT SHALL BE USED. WHERE USE OF METAL CONDUIT IS UNAVOIDABLE (i.e., NONMETALLIC CONDUIT PROHIBITED BY LOCAL CODE) THE GROUND CONDUCTOR SHALL BE BONDED TO EACH END OF THE METAL CONDUIT.
- ALL GROUNDS THAT TRANSITION FROM BELOW GRADE TO ABOVE GRADE MUST BE #2 BARE SOLID TINNED COPPER IN 3/4" NON-METALLIC, FLEXIBLE CONDUIT FROM 24" BELOW GRADE TO WITHIN 3" TO 6" OF CAD-WELD TERMINATION POINT. THE EXPOSED END OF THE CONDUIT MUST BE SEALED WITH SILICONE CAULK. (ADD TRANSITIONING GROUND STANDARD DETAIL AS WELL).
- BUILDINGS WHERE THE MAIN GROUNDING CONDUCTORS ARE REQUIRED TO BE ROUTED TO GRADE, THE CONTRACTOR SHALL ROUTE TWO GROUNDING CONDUCTORS FROM THE ROOFTOP, TOWERS, AND WATER TOWERS GROUNDING RING, TO THE EXISTING GROUNDING SYSTEM, THE GROUNDING CONDUCTORS SHALL NOT BE SMALLER THAN 2/0 COPPER. ROOFTOP GROUNDING RING SHALL BE BONDED TO THE EXISTING GROUNDING SYSTEM, THE BUILDING STEEL COLUMNS, LIGHTNING PROTECTION SYSTEM, AND BUILDING MAIN WATER LINE (FERROUS OR NONFERROUS METAL PIPING ONLY).

**GENERAL NOTES:**

- FOR THE PURPOSE OF CONSTRUCTION DRAWING, THE FOLLOWING DEFINITIONS SHALL APPLY:  
CONTRACTOR: GENERAL CONTRACTOR RESPONSIBLE FOR CONSTRUCTION  
CARRIER: T-MOBILE  
TOWER OWNER: CROWN CASTLE USA INC.
- THESE DRAWINGS HAVE BEEN PREPARED USING STANDARDS OF PROFESSIONAL CARE AND COMPLETENESS NORMALLY EXERCISED UNDER SIMILAR CIRCUMSTANCES BY REPUTABLE ENGINEERS IN THIS OR SIMILAR LOCALITIES. IT IS ASSUMED THAT THE WORK DEPICTED WILL BE PERFORMED BY AN EXPERIENCED CONTRACTOR AND/OR WORKPEOPLE WHO HAVE A WORKING KNOWLEDGE OF THE APPLICABLE CODE STANDARDS AND REQUIREMENTS AND OF INDUSTRY ACCEPTED STANDARD GOOD PRACTICE. AS NOT EVERY CONDITION OR ELEMENT IS (OR CAN BE) EXPLICITLY SHOWN ON THESE DRAWINGS, THE CONTRACTOR SHALL USE INDUSTRY ACCEPTED STANDARD GOOD PRACTICE FOR MISCELLANEOUS WORK NOT EXPLICITLY SHOWN.
- THESE DRAWINGS REPRESENT THE FINISHED STRUCTURE. THEY DO NOT INDICATE THE MEANS OR METHODS OF CONSTRUCTION. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR THE CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, AND PROCEDURES. THE CONTRACTOR SHALL PROVIDE ALL MEASURES NECESSARY FOR PROTECTION OF LIFE AND PROPERTY DURING CONSTRUCTION. SUCH MEASURES SHALL INCLUDE, BUT NOT BE LIMITED TO, BRACING, FORMWORK, SHORING, ETC. SITE VISITS BY THE ENGINEER OR HIS REPRESENTATIVE WILL NOT INCLUDE INSPECTION OF THESE ITEMS AND IS FOR STRUCTURAL OBSERVATION OF THE FINISHED STRUCTURE ONLY.
- NOTES AND DETAILS IN THE CONSTRUCTION DRAWINGS SHALL TAKE PRECEDENCE OVER GENERAL NOTES AND TYPICAL DETAILS. WHERE NO DETAILS ARE SHOWN, CONSTRUCTION SHALL CONFORM TO SIMILAR WORK ON THE PROJECT, AND/OR AS PROVIDED FOR IN THE CONTRACT DOCUMENTS. WHERE DISCREPANCIES OCCUR BETWEEN PLANS, DETAILS, GENERAL NOTES, AND SPECIFICATIONS, THE GREATER, MORE STRICT REQUIREMENTS, SHALL GOVERN. IF FURTHER CLARIFICATION IS REQUIRED CONTACT THE ENGINEER OF RECORD.
- SUBSTANTIAL EFFORT HAS BEEN MADE TO PROVIDE ACCURATE DIMENSIONS AND MEASUREMENTS ON THE DRAWINGS TO ASSIST IN THE FABRICATION AND/OR PLACEMENT OF CONSTRUCTION ELEMENTS BUT IT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO FIELD VERIFY THE DIMENSIONS, MEASUREMENTS, AND/OR CLEARANCES SHOWN IN THE CONSTRUCTION DRAWINGS PRIOR TO FABRICATION OR CUTTING OF ANY NEW OR EXISTING CONSTRUCTION ELEMENTS. IF IT IS DETERMINED THAT THERE ARE DISCREPANCIES AND/OR CONFLICTS WITH THE CONSTRUCTION DRAWINGS THE ENGINEER OF RECORD IS TO BE NOTIFIED AS SOON AS POSSIBLE.
- PRIOR TO THE SUBMISSION OF BIDS, THE BIDDING CONTRACTOR SHALL VISIT THE CELL SITE TO FAMILIARIZE WITH THE EXISTING CONDITIONS AND TO CONFIRM THAT THE WORK CAN BE ACCOMPLISHED AS SHOWN ON THE CONSTRUCTION DRAWINGS. ANY DISCREPANCY FOUND SHALL BE BROUGHT TO THE ATTENTION OF CROWN CASTLE.
- ALL MATERIALS FURNISHED AND INSTALLED SHALL BE IN STRICT ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS AND ORDINANCES. CONTRACTOR SHALL ISSUE ALL APPROPRIATE NOTICES AND COMPLY WITH ALL LAWS, ORDINANCES, RULES, REGULATIONS AND LAWFUL ORDERS OF ANY PUBLIC AUTHORITY REGARDING THE PERFORMANCE OF THE WORK. ALL WORK CARRIED OUT SHALL COMPLY WITH ALL APPLICABLE MUNICIPAL AND UTILITY COMPANY SPECIFICATIONS AND LOCAL JURISDICTIONAL CODES, ORDINANCES AND APPLICABLE REGULATIONS.
- UNLESS NOTED OTHERWISE, THE WORK SHALL INCLUDE FURNISHING MATERIALS, EQUIPMENT, APPURTENANCES AND LABOR NECESSARY TO COMPLETE ALL INSTALLATIONS AS INDICATED ON THE DRAWINGS.
- THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT AND MATERIALS IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS UNLESS SPECIFICALLY STATED OTHERWISE.
- IF THE SPECIFIED EQUIPMENT CAN NOT BE INSTALLED AS SHOWN ON THESE DRAWINGS, THE CONTRACTOR SHALL PROPOSE AN ALTERNATIVE INSTALLATION FOR APPROVAL BY THE CARRIER AND CROWN CASTLE PRIOR TO PROCEEDING WITH ANY SUCH CHANGE OF INSTALLATION.
- CONTRACTOR IS TO PERFORM A SITE INVESTIGATION AND IS TO DETERMINE THE BEST ROUTING OF ALL CONDUITS FOR POWER, AND TELCO AND FOR GROUNDING CABLES AS SHOWN IN THE POWER, TELCO, AND GROUNDING PLAN DRAWINGS.
- THE CONTRACTOR SHALL PROTECT EXISTING IMPROVEMENTS, PAVEMENTS, CURBS, LANDSCAPING AND STRUCTURES. ANY DAMAGED PART SHALL BE REPAIRED AT CONTRACTOR'S EXPENSE TO THE SATISFACTION OF CROWN CASTLE USA INC.
- CONTRACTOR SHALL LEGALLY AND PROPERLY DISPOSE OF ALL SCRAP MATERIALS SUCH AS COAXIAL CABLES AND OTHER ITEMS REMOVED FROM THE EXISTING FACILITY. ANTENNAS REMOVED SHALL BE RETURNED TO THE OWNER'S DESIGNATED LOCATION.
- CONTRACTOR SHALL LEAVE PREMISES IN CLEAN CONDITION. TRASH AND DEBRIS SHOULD BE REMOVED FROM SITE ON A DAILY BASIS.

**CONCRETE, FOUNDATIONS, AND REINFORCING STEEL:**

- ALL CONCRETE WORK SHALL BE IN ACCORDANCE WITH THE ACI 301, ACI 318, ACI 336, ASTM A184, ASTM A185 AND THE DESIGN AND CONSTRUCTION SPECIFICATION FOR CAST-IN-PLACE CONCRETE.
- UNLESS NOTED OTHERWISE, SOIL BEARING PRESSURE USED FOR DESIGN OF SLABS AND FOUNDATIONS IS ASSUMED TO BE 1000 psf.
- ALL CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH (f'c) OF 3000 psi AT 28 DAYS, UNLESS NOTED OTHERWISE. NO MORE THAN 90 MINUTES SHALL ELAPSE FROM BATCH TIME TO TIME OF PLACEMENT UNLESS APPROVED BY THE ENGINEER OF RECORD. TEMPERATURE OF CONCRETE SHALL NOT EXCEED 90°F AT TIME OF PLACEMENT.
- CONCRETE EXPOSED TO FREEZE-THAW CYCLES SHALL CONTAIN AIR ENTRAINING ADMIXTURES. AMOUNT OF AIR ENTRAINMENT TO BE BASED ON SIZE OF AGGREGATE AND F3 CLASS EXPOSURE (VERY SEVERE). CEMENT USED TO BE TYPE II PORTLAND CEMENT WITH A MAXIMUM WATER-TO-CEMENT RATIO (W/C) OF 0.45.
- ALL STEEL REINFORCING SHALL CONFORM TO ASTM A615. ALL WELDED WIRE FABRIC (WWF) SHALL CONFORM TO ASTM A185. ALL SPLICES SHALL BE CLASS "B" TENSION SPLICES, UNLESS NOTED OTHERWISE. ALL HOOKS SHALL BE STANDARD 90 DEGREE HOOKS, UNLESS NOTED OTHERWISE. YIELD STRENGTH (Fy) OF STANDARD DEFORMED BARS ARE AS FOLLOWS:  
#4 BARS AND SMALLER.....40 ksi  
#5 BARS AND LARGER.....60 ksi
- THE FOLLOWING MINIMUM CONCRETE COVER SHALL BE PROVIDED FOR REINFORCING STEEL UNLESS SHOWN OTHERWISE ON DRAWINGS:  
CONCRETE CAST AGAINST AND PERMANENTLY EXPOSED TO EARTH.....3"  
CONCRETE EXPOSED TO EARTH OR WEATHER:  
#6 BARS AND LARGER.....2"  
#5 BARS AND SMALLER.....1-1/2"  
CONCRETE NOT EXPOSED TO EARTH OR WEATHER:  
SLAB AND WALLS.....3/4"  
BEAMS AND COLUMNS.....1-1/2"
- A TOOLED EDGE OR A 3/4" CHAMFER SHALL BE PROVIDED AT ALL EXPOSED EDGES OF CONCRETE, UNLESS NOTED OTHERWISE, IN ACCORDANCE WITH ACI 301 SECTION 4.2.4.

**ELECTRICAL INSTALLATION NOTES:**

- ALL ELECTRICAL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS, NEC AND ALL APPLICABLE FEDERAL, STATE, AND LOCAL CODES/ORDINANCES.
- CONDUIT ROUTINGS ARE SCHEMATIC. CONTRACTOR SHALL INSTALL CONDUITS SO THAT ACCESS TO EQUIPMENT IS NOT BLOCKED AND TRIP HAZARDS ARE ELIMINATED.
- WIRING, RACEWAY AND SUPPORT METHODS AND MATERIALS SHALL COMPLY WITH THE REQUIREMENTS OF THE NEC.
- ALL CIRCUITS SHALL BE SEGREGATED AND MAINTAIN MINIMUM CABLE SEPARATION AS REQUIRED BY THE NEC.  
4.1. ALL EQUIPMENT SHALL BEAR THE UNDERWRITERS LABORATORIES LABEL OF APPROVAL, AND SHALL CONFORM TO REQUIREMENT OF THE NATIONAL ELECTRICAL CODE.
- ALL OVERCURRENT DEVICES SHALL HAVE AN INTERRUPTING CURRENT RATING THAT SHALL BE GREATER THAN THE SHORT CIRCUIT CURRENT TO WHICH THEY ARE SUBJECTED, 22,000 AIC MINIMUM. VERIFY AVAILABLE SHORT CIRCUIT CURRENT DOES NOT EXCEED THE RATING OF ELECTRICAL EQUIPMENT IN ACCORDANCE WITH ARTICLE 110.24 NEC OR THE MOST CURRENT ADOPTED CODE PRE THE GOVERNING JURISDICTION.
- EACH END OF EVERY POWER PHASE CONDUCTOR, GROUNDING CONDUCTOR, AND TELCO CONDUCTOR OR CABLE SHALL BE LABELED WITH COLOR-CODED INSULATION OR ELECTRICAL TAPE (3M BRAND, 1/2" PLASTIC ELECTRICAL TAPE WITH UV PROTECTION, OR EQUAL). THE IDENTIFICATION METHOD SHALL CONFORM WITH NEC AND OSHA.
- ALL ELECTRICAL COMPONENTS SHALL BE CLEARLY LABELED WITH LAMICOID TAGS SHOWING THEIR RATED VOLTAGE, PHASE CONFIGURATION, WIRE CONFIGURATION, POWER OR AMPACITY RATING AND BRANCH CIRCUIT ID NUMBERS (i.e. PANEL BOARD AND CIRCUIT ID'S).
- PANEL BOARDS (ID NUMBERS) SHALL BE CLEARLY LABELED WITH PLASTIC LABELS.
- ALL TIE WRAPS SHALL BE CUT FLUSH WITH APPROVED CUTTING TOOL TO REMOVE SHARP EDGES.
- ALL POWER AND EQUIPMENT GROUND WIRING IN TUBING OR CONDUIT SHALL BE SINGLE COPPER CONDUCTOR (#14 OR LARGER) WITH TYPE THHW, THWN, THWN-2, XHHW, XHHW-2, THW, THW-2, RHW, OR RHW-2 INSULATION UNLESS OTHERWISE SPECIFIED.
- SUPPLEMENTAL EQUIPMENT GROUND WIRING LOCATED INDOORS SHALL BE SINGLE COPPER CONDUCTOR (#6 OR LARGER) WITH TYPE THHW, THWN, THWN-2, XHHW, XHHW-2, THW, THW-2, RHW, OR RHW-2 INSULATION UNLESS OTHERWISE SPECIFIED.
- POWER AND CONTROL WIRING IN FLEXIBLE CORD SHALL BE MULTI-CONDUCTOR, TYPE SOOW CORD (#14 OR LARGER) UNLESS OTHERWISE SPECIFIED.
- POWER AND CONTROL WIRING FOR USE IN CABLE TRAY SHALL BE MULTI-CONDUCTOR, TYPE TC CABLE (#14 OR LARGER), WITH TYPE THHW, THWN, THWN-2, XHHW, XHHW-2, THW, THW-2, RHW, OR RHW-2 INSULATION UNLESS OTHERWISE SPECIFIED.
- ALL POWER AND GROUNDING CONNECTIONS SHALL BE CRIMP-STYLE, COMPRESSION WIRE LUGS AND WIRE NUTS BY THOMAS AND BETTS (OR EQUAL). LUGS AND WIRE NUTS SHALL BE RATED FOR OPERATION NOT LESS THAN 75° C (90° C IF AVAILABLE).
- RACEWAY AND CABLE TRAY SHALL BE LISTED OR LABELED FOR ELECTRICAL USE IN ACCORDANCE WITH NEMA, UL, ANSI/IEEE AND NEC.
- ELECTRICAL METALLIC TUBING (EMT), INTERMEDIATE METAL CONDUIT (IMC), OR RIGID METAL CONDUIT (RMC) SHALL BE USED FOR EXPOSED INDOOR LOCATIONS.
- ELECTRICAL METALLIC TUBING (EMT) OR METAL-CLAD CABLE (MC) SHALL BE USED FOR CONCEALED INDOOR LOCATIONS.
- SCHEDULE 40 PVC UNDERGROUND ON STRAIGHTS AND SCHEDULE 80 PVC FOR ALL ELBOWS/90s AND ALL APPROVED ABOVE GRADE PVC CONDUIT.
- LIQUID-TIGHT FLEXIBLE METALLIC CONDUIT (LIQUID-TITE FLEX) SHALL BE USED INDOORS AND OUTDOORS, WHERE VIBRATION OCCURS OR FLEXIBILITY IS NEEDED.
- CONDUIT AND TUBING FITTINGS SHALL BE THREADED OR COMPRESSION-TYPE AND APPROVED FOR THE LOCATION USED. SET NEW FITTINGS AND NOT ACCEPTABLE.
- CABINETS, BOXES AND WIRE WAYS SHALL BE LABELED FOR ELECTRICAL USE IN ACCORDANCE WITH NEMA, UL, ANSI/IEEE AND THE NEC.
- WIREWAYS SHALL BE METAL WITH AN ENAMEL FINISH AND INCLUDE A HINGED COVER, DESIGNED TO SWING OPEN DOWNWARDS (WIREMOLD SPECMATE WIREWAY).
- SLOTTED WIRING DUCT SHALL BE PVC AND INCLUDE COVER (PANDUIT TYPE E OR EQUAL).
- CONDUITS SHALL BE FASTENED SECURELY IN PLACE WITH APPROVED NON-PERFORATED STRAPS AND HANGERS. EXPLOSIVE DEVICES (i.e. POWDER-ACTUATED) FOR ATTACHING HANGERS TO STRUCTURE WILL NOT BE PERMITTED. CLOSELY FOLLOW THE LINES OF THE STRUCTURE, MAINTAIN CLOSE PROXIMITY TO THE STRUCTURE AND KEEP CONDUITS IN TIGHT ENVELOPES. CHANGES IN DIRECTION TO ROUTE AROUND OBSTACLES SHALL BE MADE WITH CONDUIT OUTLET BODIES. CONDUIT SHALL BE INSTALLED IN A NEAT AND WORKMANLIKE MANNER. PARALLEL AND PERPENDICULAR TO STRUCTURE WALL AND CEILING LINES. ALL CONDUIT SHALL BE FISHED TO CLEAR OBSTRUCTIONS. ENDS OF CONDUITS SHALL BE TEMPORARILY CAPPED FLUSH TO FINISH GRADE TO PREVENT CONCRETE, PLASTER OR DIRT FROM ENTERING. CONDUITS SHALL BE RIGIDLY CLAMPED TO BOXES BY GALVANIZED MALLEABLE IRON BUSHING ON INSIDE AND GALVANIZED MALLEABLE IRON LOCKNUT ON OUTSIDE AND INSIDE.
- EQUIPMENT CABINETS, TERMINAL BOXES, JUNCTION BOXES AND PULL BOXES SHALL BE GALVANIZED OR EPOXY-COATED SHEET STEEL. SHALL MEET OR EXCEED UL 50 AND BE RATED NEMA 1 (OR BETTER) FOR INTERIOR LOCATIONS AND NEMA 3R (OR BETTER) FOR EXTERIOR LOCATIONS.
- METAL RECEPTACLE, SWITCH AND DEVICE BOXES SHALL BE GALVANIZED, EPOXY-COATED OR NON-CORRODING; SHALL MEET OR EXCEED UL 514A AND NEMA OS 1 AND BE RATED NEMA 1 (OR BETTER) FOR INTERIOR LOCATIONS AND WEATHER PROTECTED (WP OR BETTER) FOR EXTERIOR LOCATIONS.
- NONMETALLIC RECEPTACLE, SWITCH AND DEVICE BOXES SHALL MEET OR EXCEED NEMA OS 2 (NEWEST REVISION) AND BE RATED NEMA 1 (OR BETTER) FOR INTERIOR LOCATIONS AND WEATHER PROTECTED (WP OR BETTER) FOR EXTERIOR LOCATIONS.
- THE CONTRACTOR SHALL NOTIFY AND OBTAIN NECESSARY AUTHORIZATION FROM THE CARRIER AND/OR CROWN CASTLE USA INC. BEFORE COMMENCING WORK ON THE AC POWER DISTRIBUTION PANELS.
- THE CONTRACTOR SHALL PROVIDE NECESSARY TAGGING ON THE BREAKERS, CABLES AND DISTRIBUTION PANELS IN ACCORDANCE WITH THE APPLICABLE CODES AND STANDARDS TO SAFEGUARD LIFE AND PROPERTY.
- INSTALL LAMICOID LABEL ON THE METER CENTER TO SHOW "T-MOBILE".
- ALL EMPTY/SPARE CONDUITS THAT ARE INSTALLED ARE TO HAVE A METERED MULE TAPE PULL CORD INSTALLED.

CONDUCTOR COLOR CODE		
SYSTEM	CONDUCTOR	COLOR
120/240V, 1Ø	A PHASE	BLACK
	B PHASE	RED
	NEUTRAL	WHITE
120/208V, 3Ø	GROUND	GREEN
	A PHASE	BLACK
	B PHASE	RED
277/480V, 3Ø	C PHASE	BLUE
	NEUTRAL	WHITE
	GROUND	GREEN
DC VOLTAGE	A PHASE	BROWN
	B PHASE	ORANGE OR PURPLE
	C PHASE	YELLOW
	NEUTRAL	GREY
	GROUND	GREEN
	POS (+)	RED**
	NEG (-)	BLACK**

\* SEE NEC 210.5(C)(1) AND (2)  
\*\* POLARITY MARKED AT TERMINATION

**ABBREVIATIONS:**

ANT	ANTENNA
(E)	EXISTING
FIF	FACILITY INTERFACE FRAME
GEN	GENERATOR
GPS	GLOBAL POSITIONING SYSTEM
GSM	GLOBAL SYSTEM FOR MOBILE
LTE	LONG TERM EVOLUTION
MGB	MASTER GROUND BAR
MW	MICROWAVE
(N)	NEW
NEC	NATIONAL ELECTRIC CODE
(P)	PROPOSED
PP	POWER PLAN
QTY	QUANTITY
RECT	RECTIFIER
RBS	RADIO BASE STATION
RETS	REMOTE ELECTRIC TILT
RFDS	RADIO FREQUENCY DATA SHEET
RRH	REMOTE RADIO HEAD
RRIJ	REMOTE RADIO UNIT
SIAD	SMART INTEGRATED DEVICE
TMA	TOWER MOUNTED AMPLIFIER
TYP	TYPICAL
UMTS	UNIVERSAL MOBILE TELECOMMUNICATIONS SYSTEM
W.P.	WORK POINT

**APWA UNIFORM COLOR CODE:**

<b>WHITE</b>	PROPOSED EXCAVATION
<b>PINK</b>	TEMPORARY SURVEY MARKINGS
<b>RED</b>	ELECTRIC POWER LINES, CABLES, CONDUIT, AND LIGHTING CABLES
<b>YELLOW</b>	GAS, OIL, STEAM, PETROLEUM, OR GASEOUS MATERIALS
<b>ORANGE</b>	COMMUNICATION, ALARM OR SIGNAL LINES, CABLES, OR CONDUIT AND TRAFFIC LOOPS
<b>BLUE</b>	POTABLE WATER
<b>PURPLE</b>	RECLAIMED WATER, IRRIGATION, AND SLURRY LINES
<b>GREEN</b>	SEWERS AND DRAIN LINES

**T-Mobile**

35 GRIFFIN ROAD  
BLOOMFIELD, CT 06002

**CROWN CASTLE**

3 CORPORATE PARK DRIVE, SUITE 101  
CLIFTON PARK, NY 12065

**INFINIGY**

FROM ZERO TO INFINIGY  
the solutions are endless

1033 Watervliet Shaker Rd | Albany, NY 12205  
Phone: 518-690-0790 | Fax: 518-690-0793  
www.infinigy.com

**T-MOBILE SITE NUMBER:  
CT11279D**

**BU #: 828054  
SOUTH WINDOR/RT 5**

**300 GOVERNORS HIGHWAY  
SOUTH WINDSOR, CT 06074**

**EXISTING 165' MONOPOLE**

**ISSUED FOR:**

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	12/03/20	BMM	FINAL	SS
1	01/20/21	BMM	GROUND AREA ADD	SS
2	01/26/21	SS	GROUND AREA REV	SS

STATE OF CONNECTICUT  
SHUHEI SAKANoue  
34916  
PROFESSIONAL ENGINEER  
1/26/21


IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

**SHEET NUMBER: T-2**


**REVISION: 1**

NOTE:

1. PLANS BASED ON SITE PLAN PROVIDED BY TOWER OWNER AND SITE VISIT PERFORMED BY INFINIGY. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND LOCATION/ORIENTATION OF EXISTING T-MOBILE EQUIPMENT.

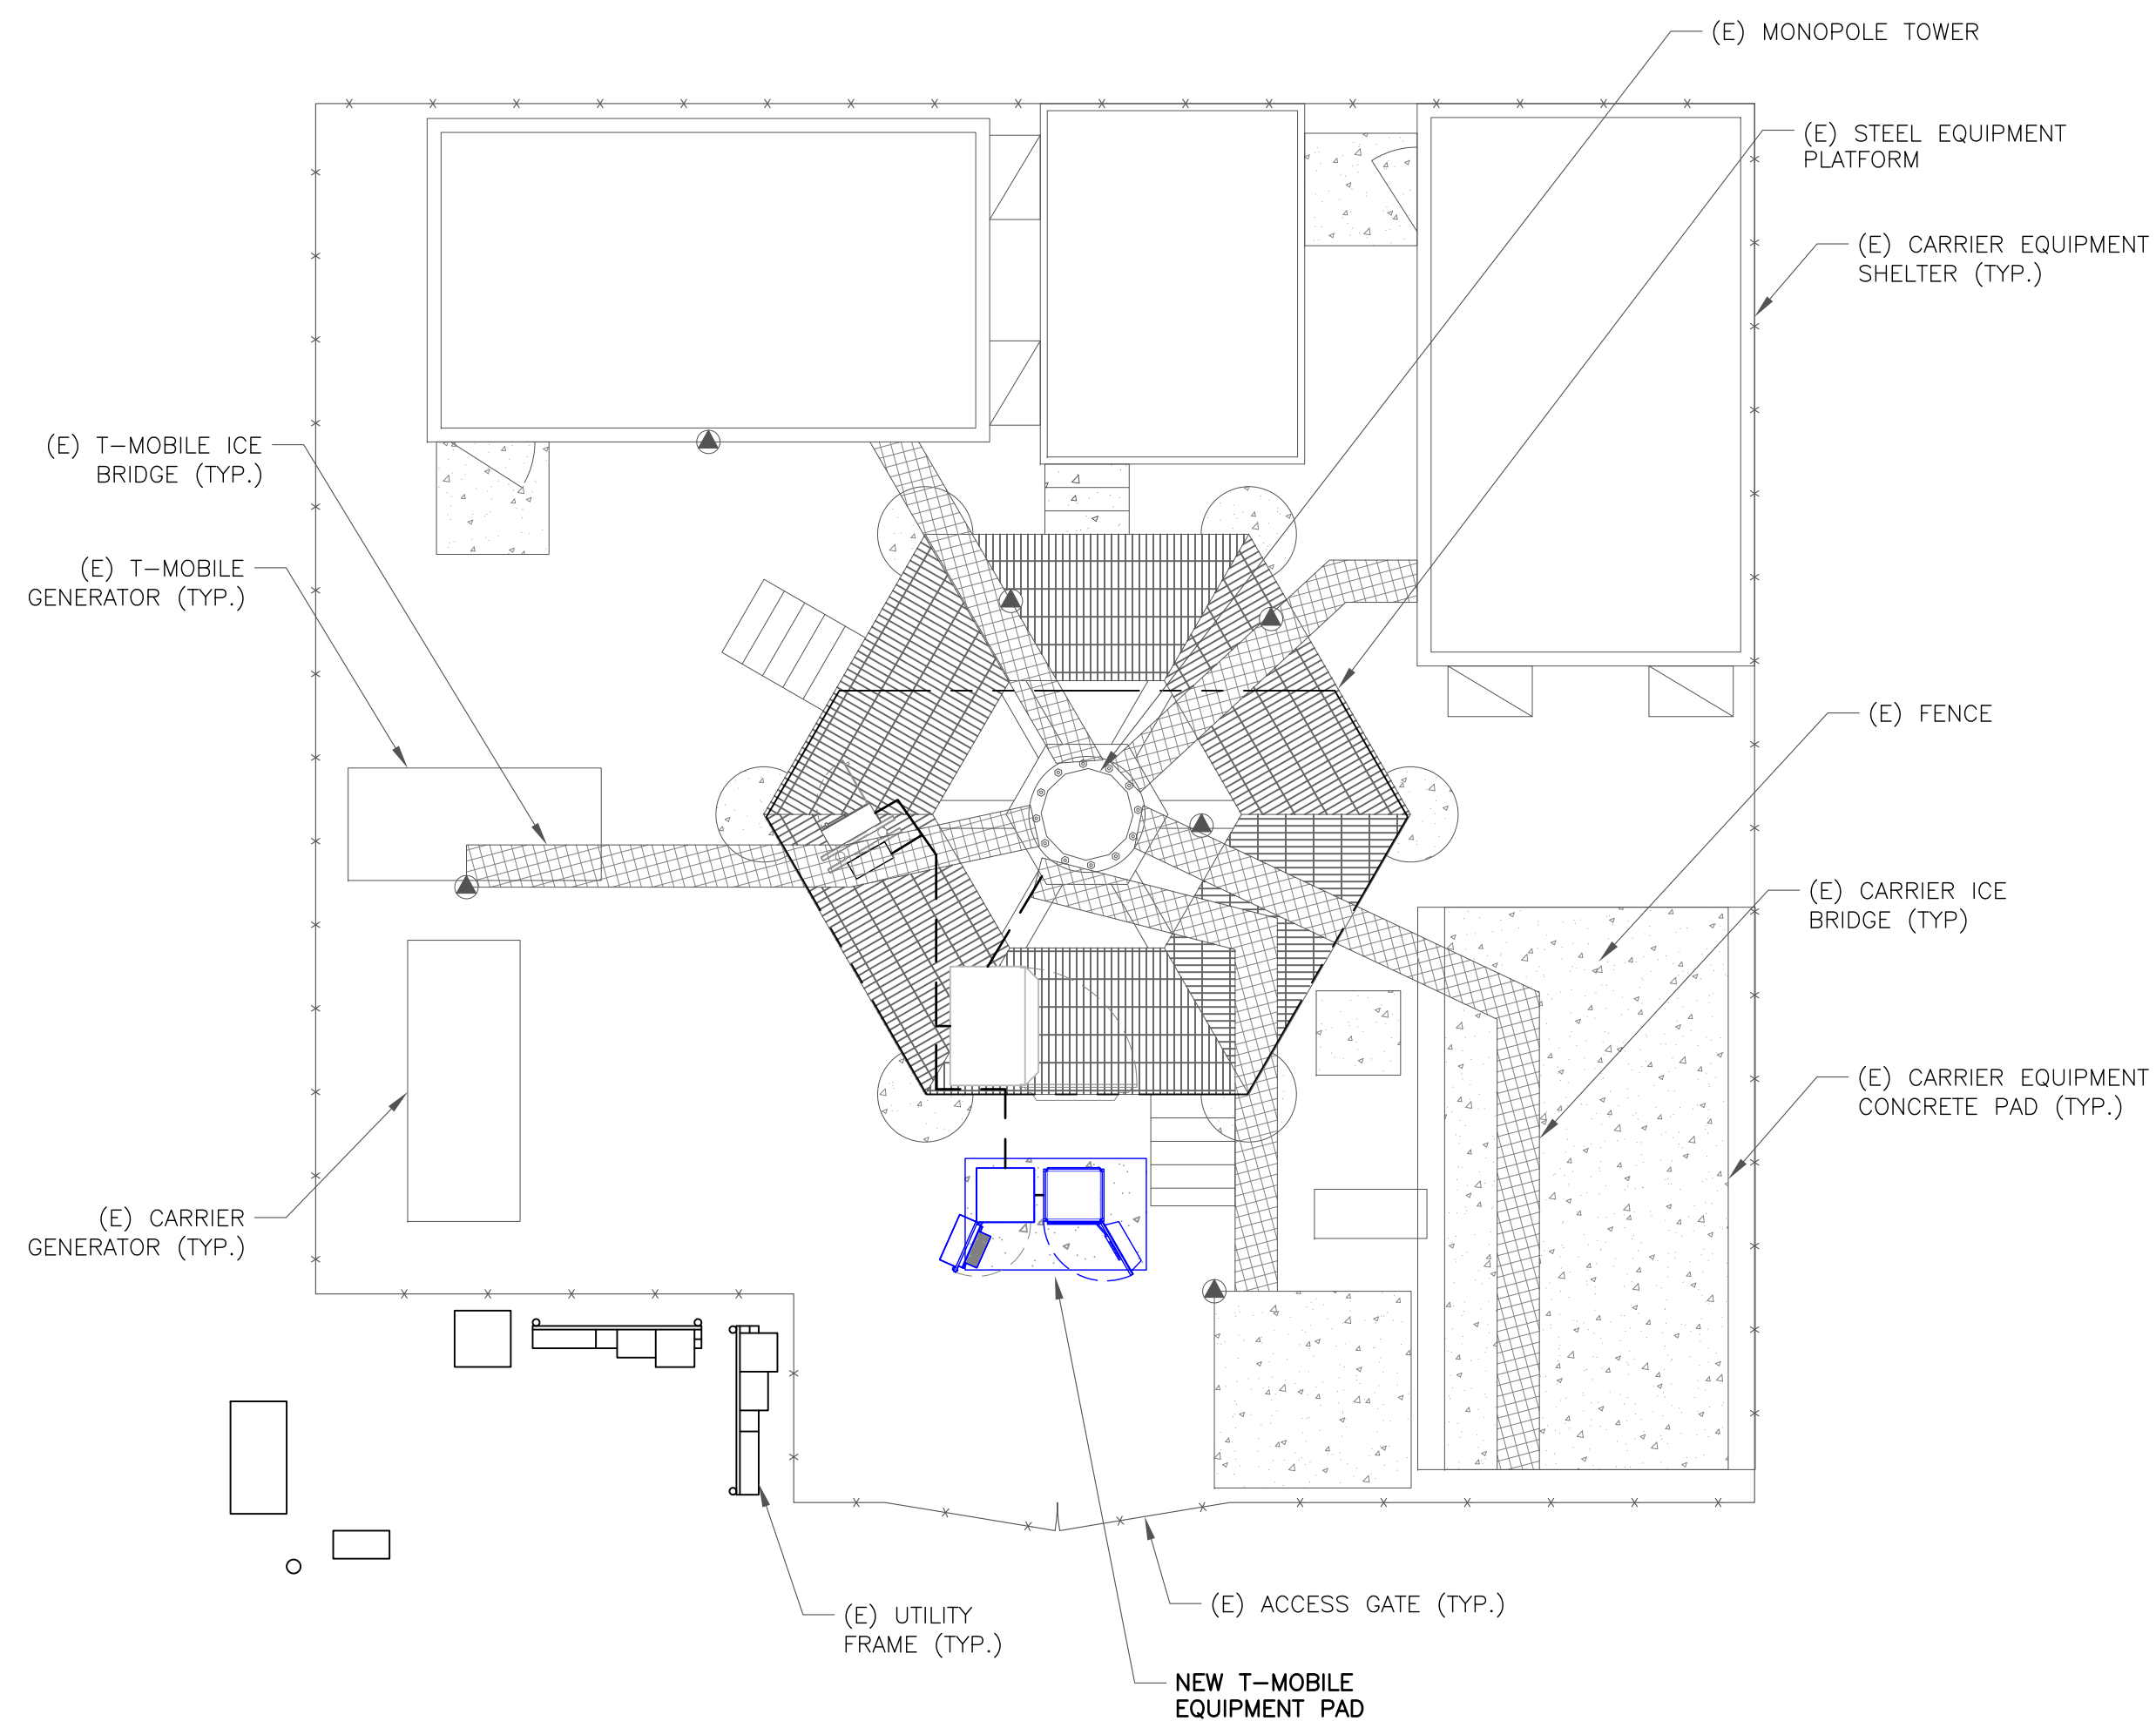

1 SITE PLAN  
SCALE: 1"=10'-0" (FULL SIZE)  
1"=20'-0" (11x17)

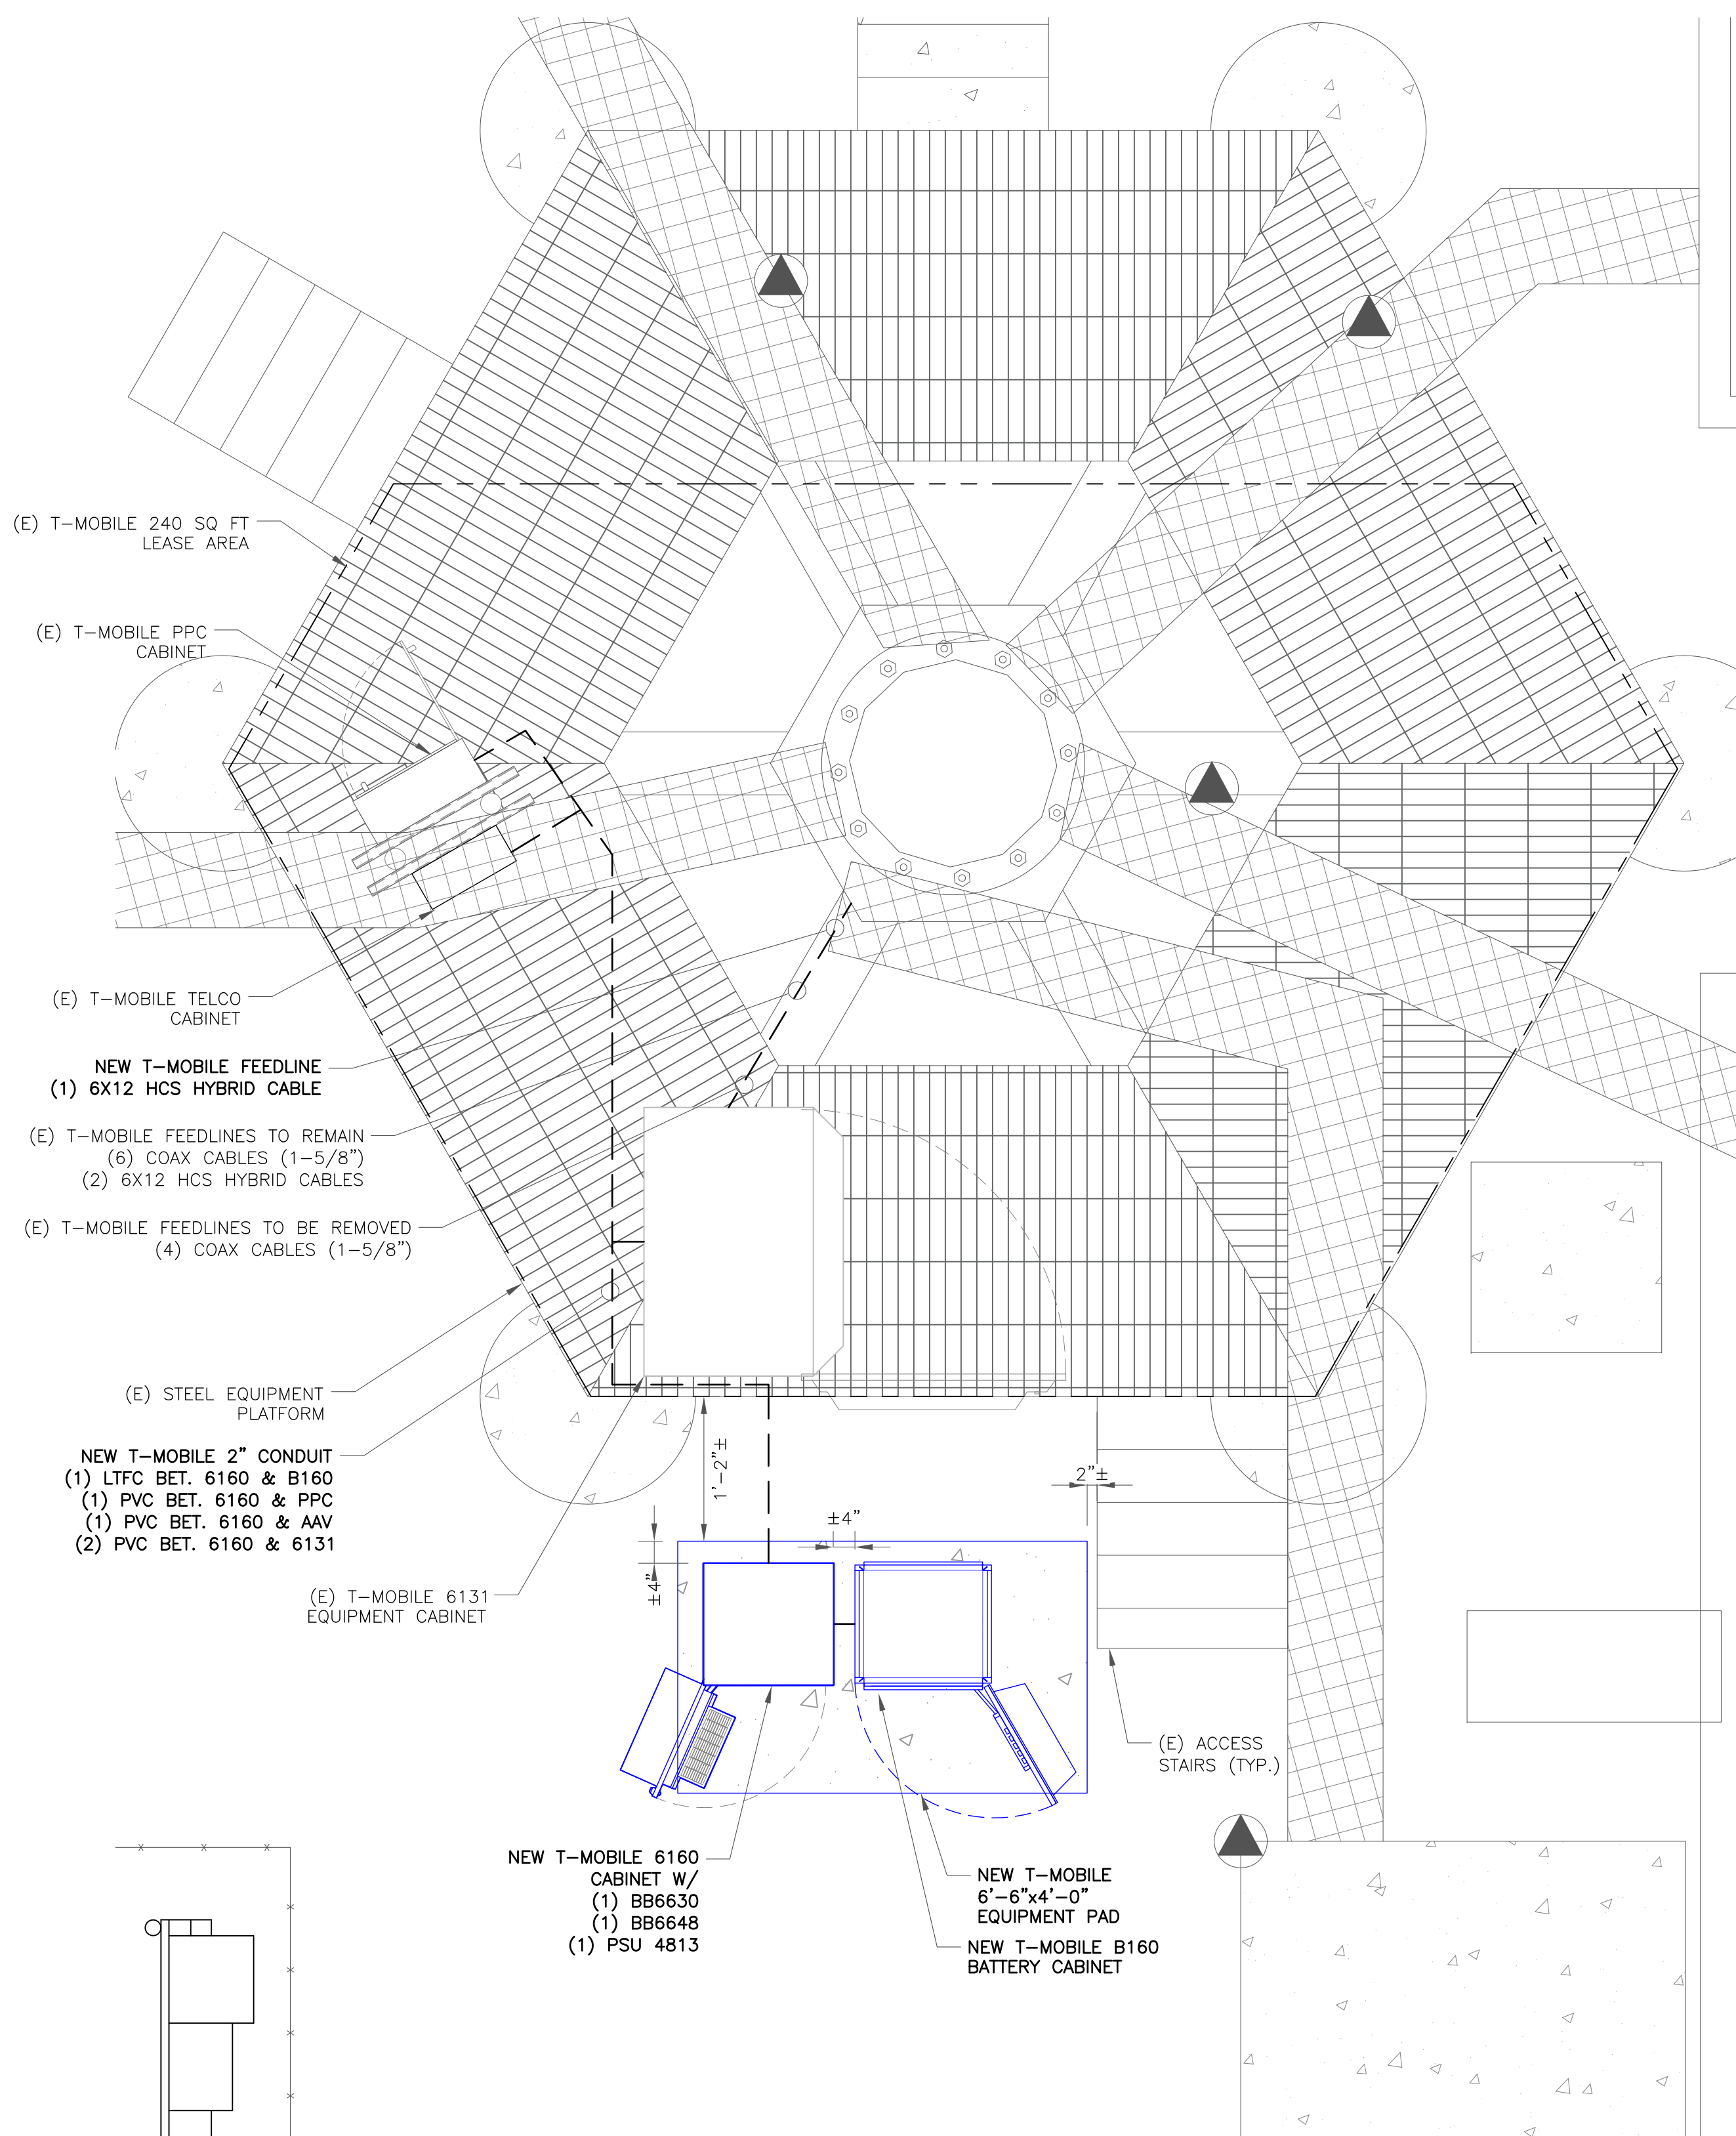

2 ENLARGED SITE PLAN  
SCALE: 1"=1'-0" (FULL SIZE)  
1/2"=1'-0" (11x17)



**T-Mobile**

35 GRIFFIN ROAD  
BLOOMFIELD, CT 06002

**CROWN CASTLE**

3 CORPORATE PARK DRIVE, SUITE 101  
CLIFTON PARK, NY 12065

**INFINIGY**

FROM ZERO TO INFINIGY  
the solutions are endless

1033 Watervliet Shaker Rd | Albany, NY 12205  
Phone: 518-690-0790 | Fax: 518-690-0793  
www.infinigy.com

T-MOBILE SITE NUMBER:  
**CT11279D**


BU #: 828054  
**SOUTH WINDOR/RT 5**

300 GOVERNORS HIGHWAY  
SOUTH WINDSOR, CT 06074

EXISTING 165' MONOPOLE

ISSUED FOR:

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	12/03/20	BMM	FINAL	SS
1	01/20/21	BMM	GROUND AREA ADD	SS
2	01/26/21	SS	GROUND AREA REV	SS

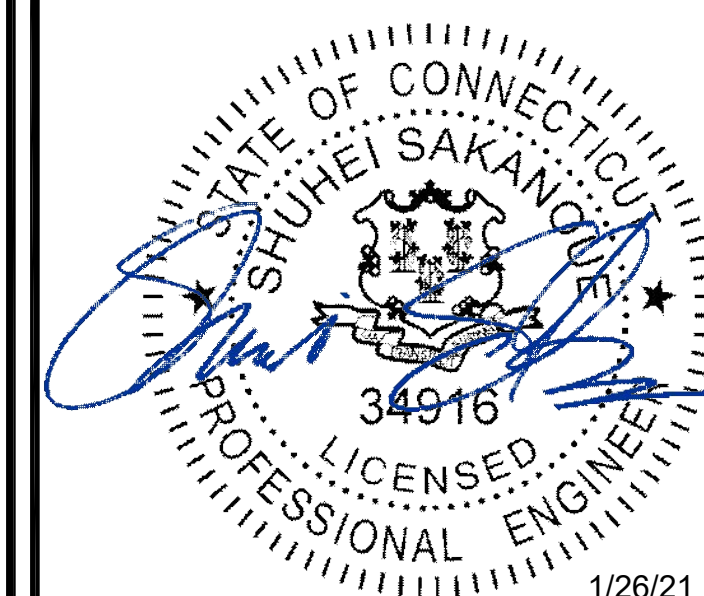


IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SHEET NUMBER: REVISION:

**C-1** **1**

NOTES:


- ELEVATION BASED ON DRAWING PROVIDED BY TOWER OWNER. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND LOCATION/ORIENTATION OF EXISTING EQUIPMENT.
- INFINIGY HAS NOT EVALUATED THE TOWER STRUCTURE AND ASSUMES NO RESPONSIBILITY FOR THEIR STRUCTURAL INTEGRITY REGARDING PROPOSED LOADINGS. FINAL INSTALLATION SHALL COMPLY WITH RESULTS OF PASSING STRUCTURAL ANALYSES PERFORMED BY OTHERS.

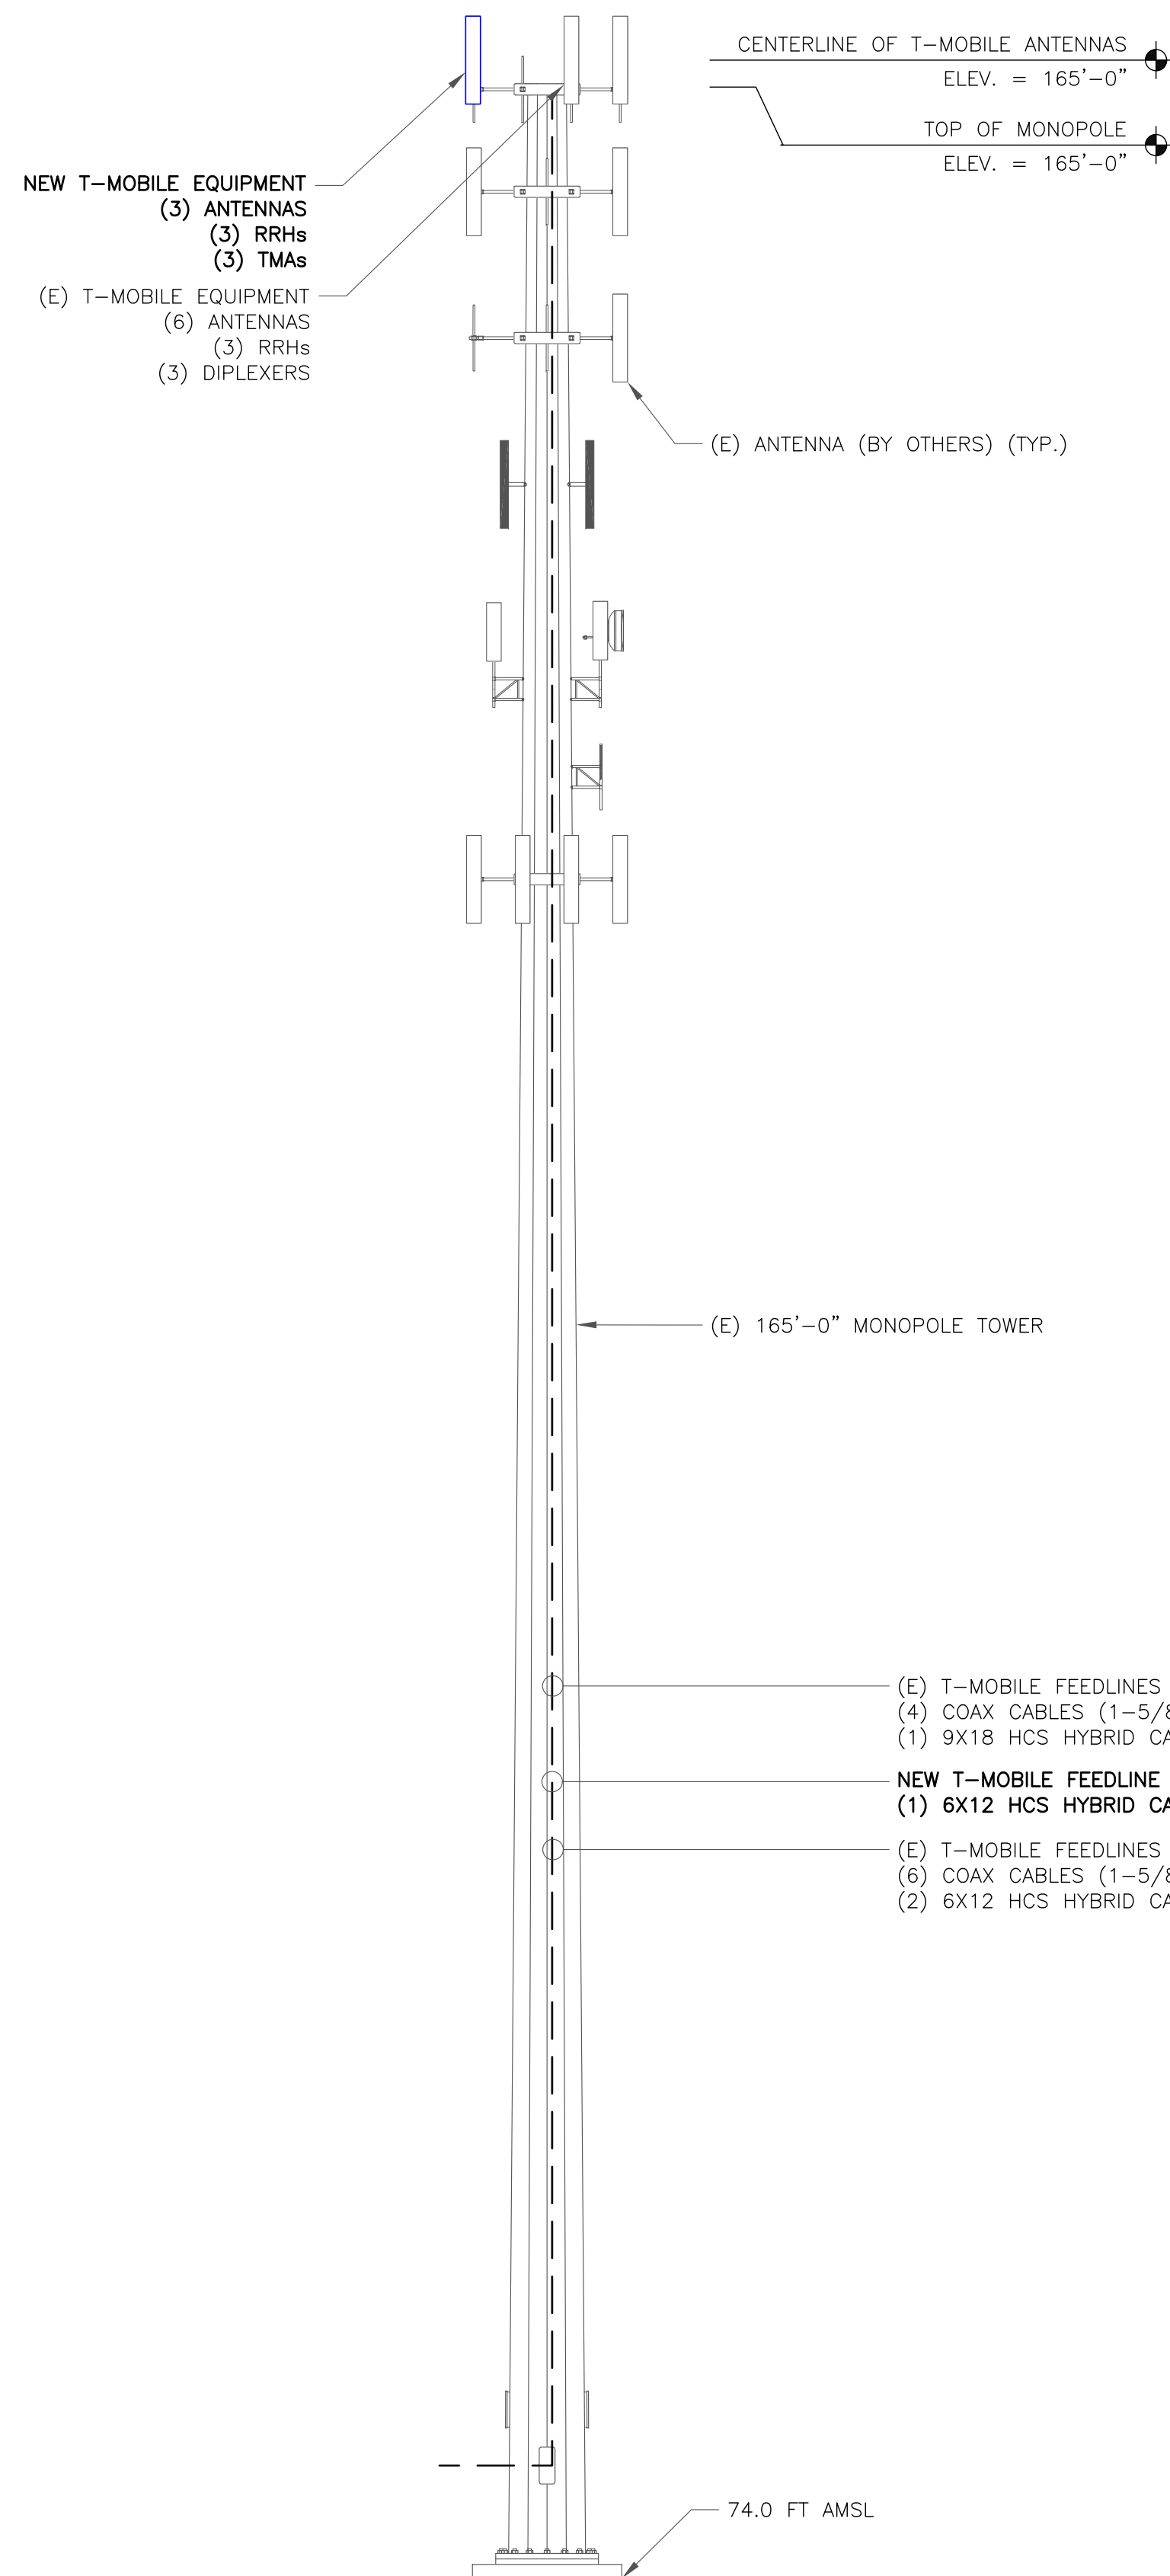


1 FINAL ELEVATION  
SCALE: NOT TO SCALE

**T-MOBILE EQUIPMENT**  
ANTENNA CL: 165'  
MOUNT CL: 165'

ANY AND ALL TOWER MOUNTED EQUIPMENT MUST NOT TRAP OR INTERFERE W/ EXISTING SAFETY CLIMB

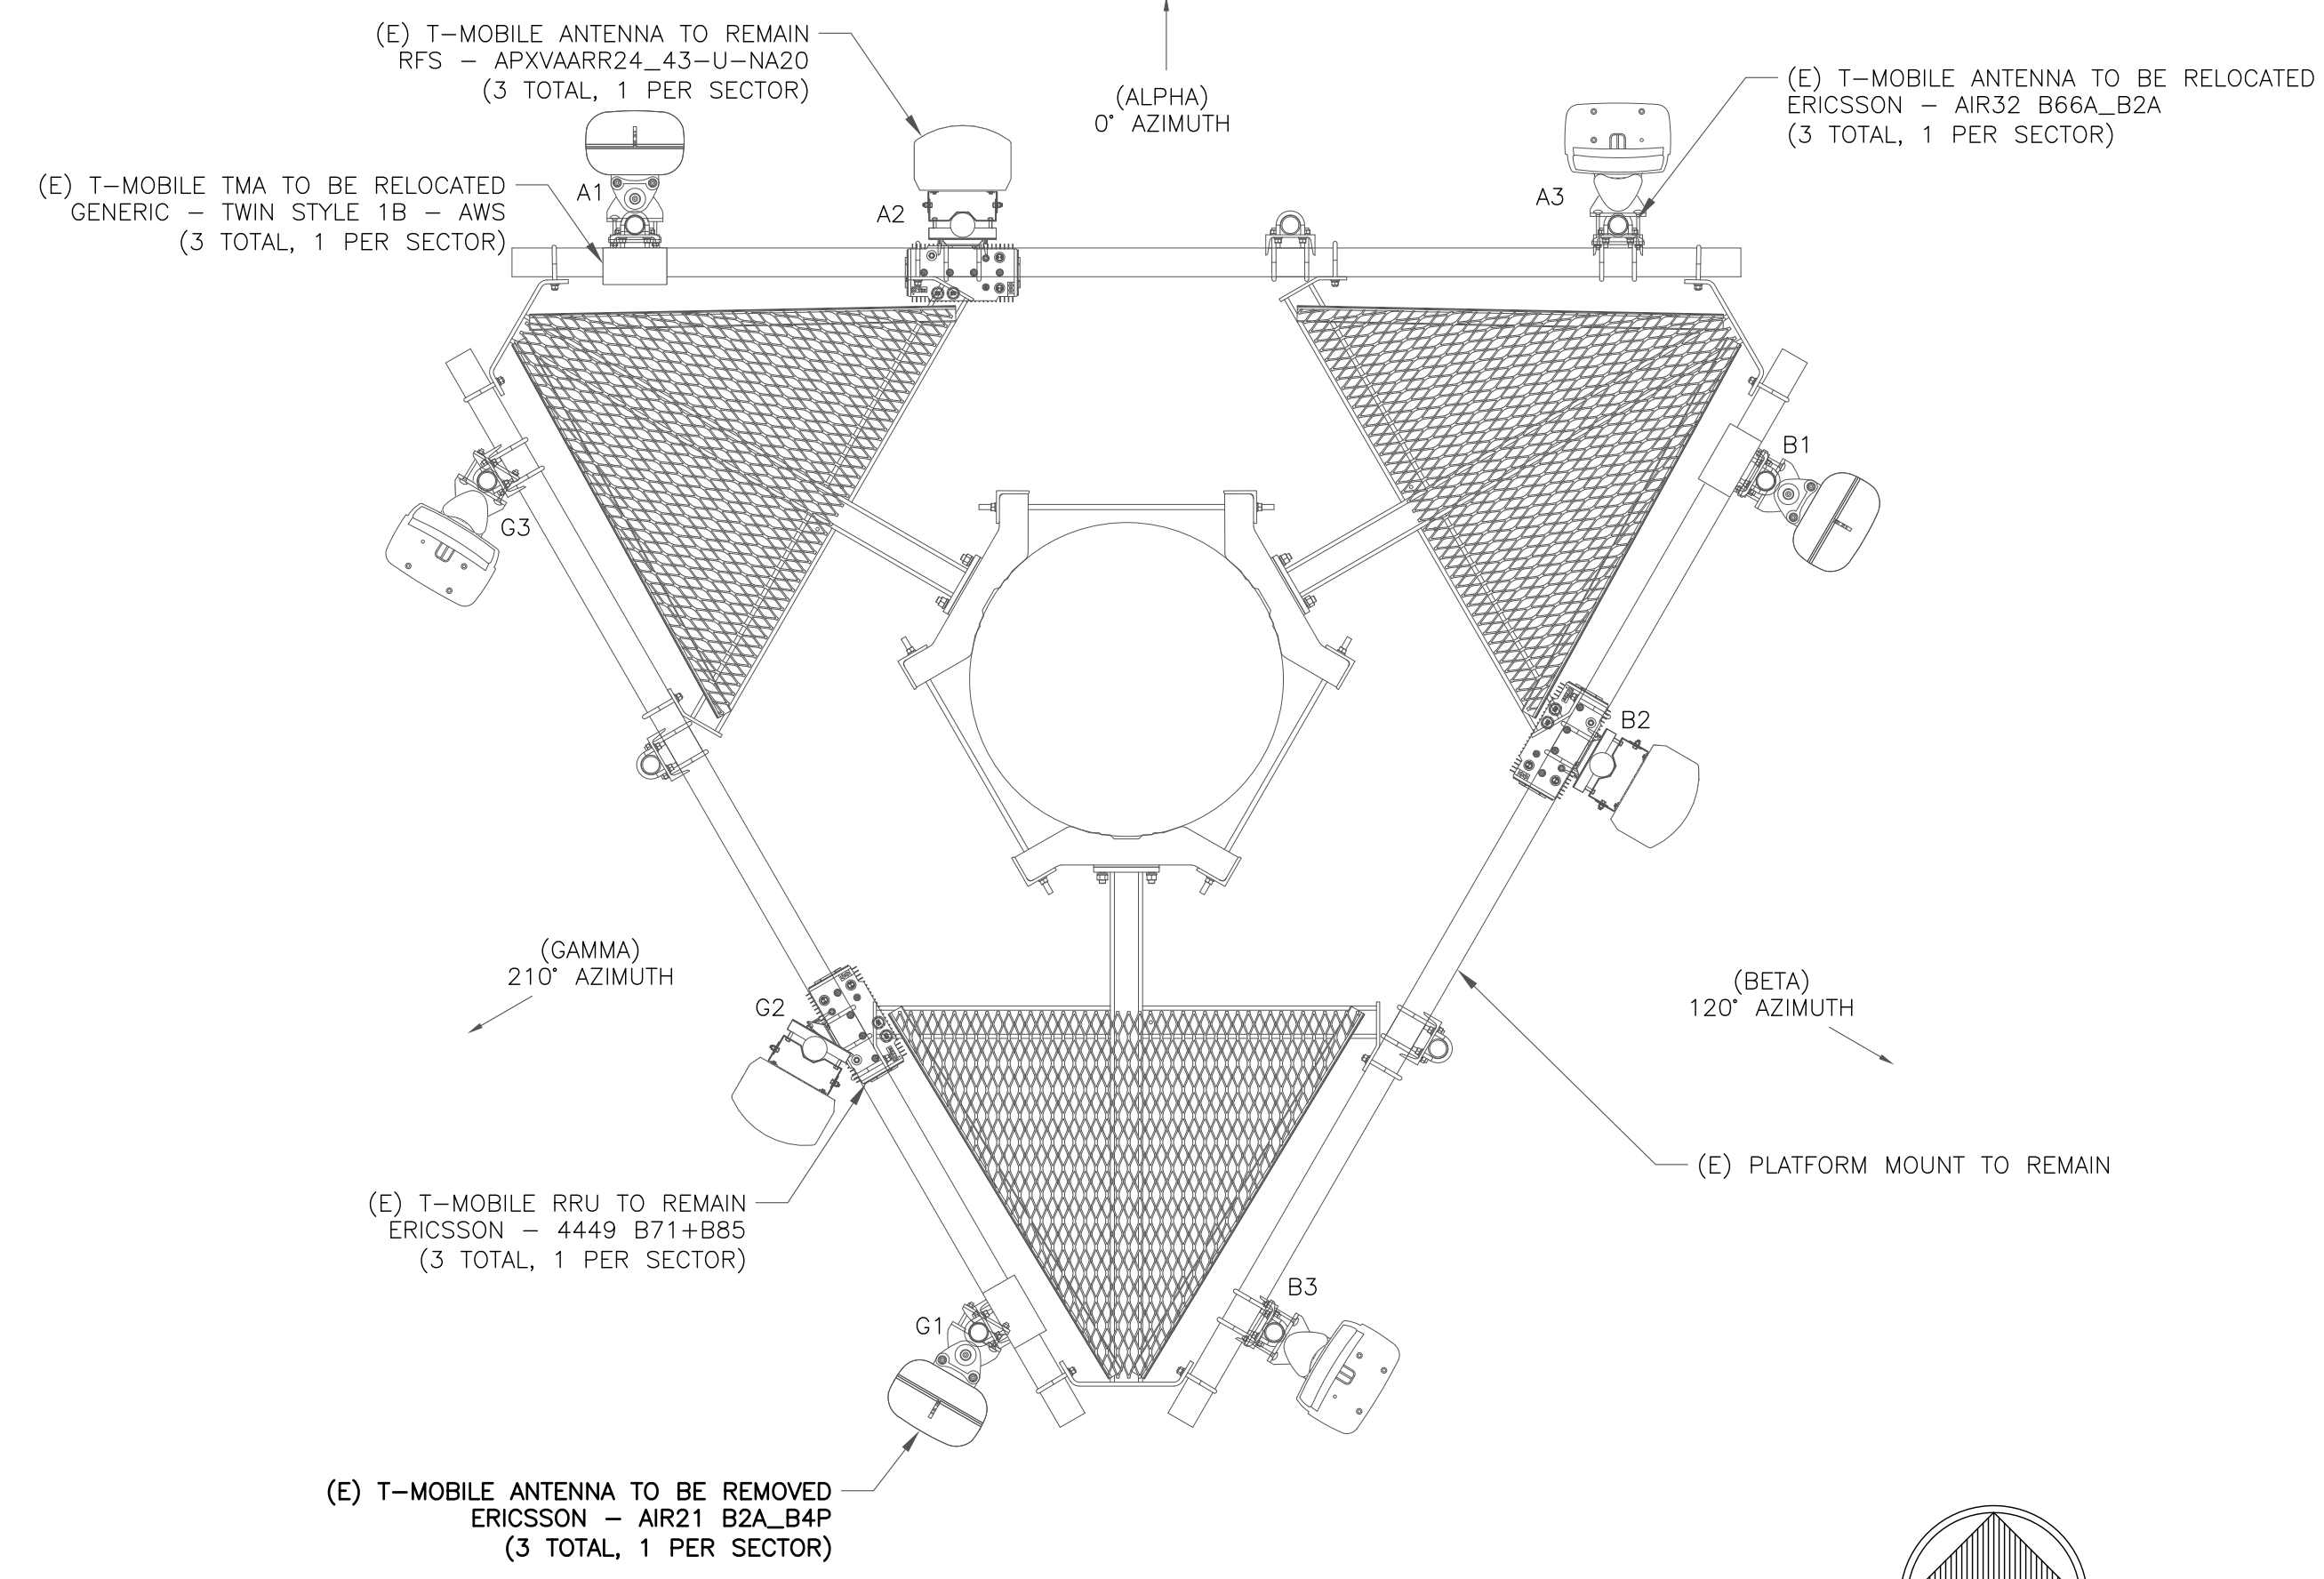

2 EXISTING ANTENNA LAYOUT  
SCALE: NOT TO SCALE

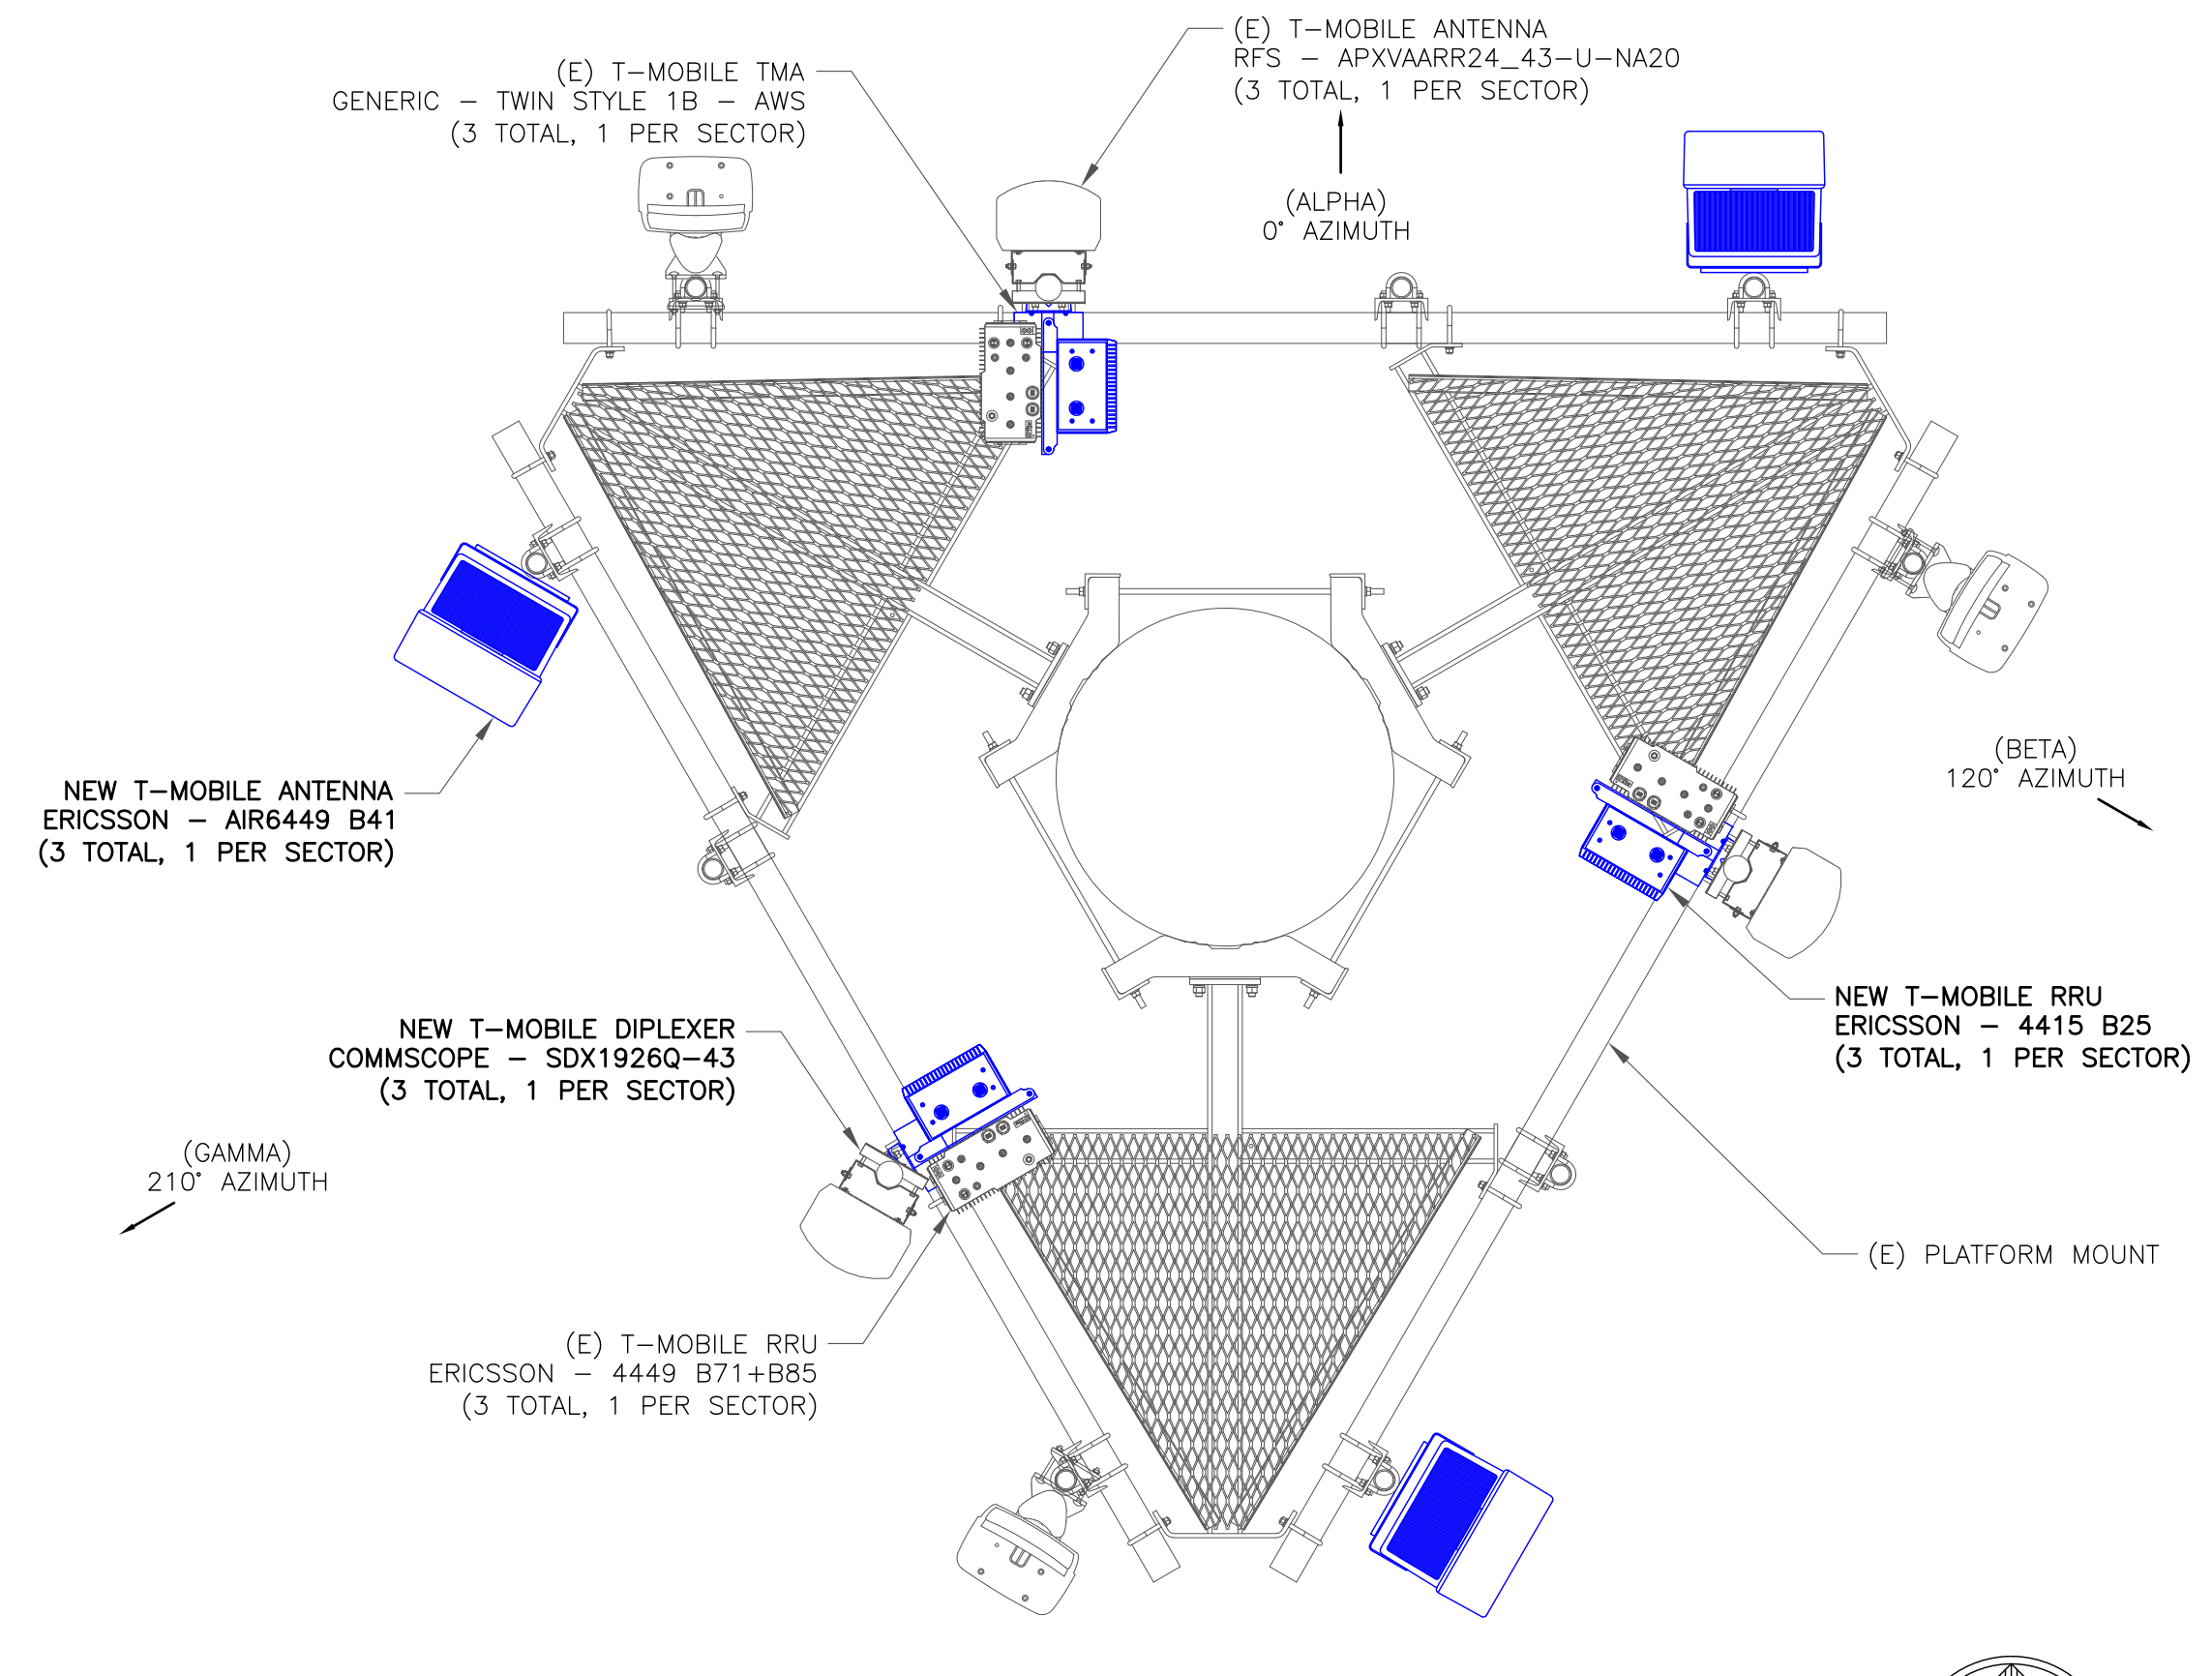

3 FINAL ANTENNA LAYOUT  
SCALE: NOT TO SCALE

**T-Mobile**  
35 GRIFFIN ROAD  
BLOOMFIELD, CT 06002

**CROWN CASTLE**  
3 CORPORATE PARK DRIVE, SUITE 101  
CLIFTON PARK, NY 12065

**INFINIGY**  
FROM ZERO TO INFINIGY  
the solutions are endless  
1033 Watervliet Shaker Rd | Albany, NY 12205  
Phone: 518-690-0790 | Fax: 518-690-0793  
www.infinigy.com

T-MOBILE SITE NUMBER:  
**CT11279D**

BU #: 828054  
**SOUTH WINDOR/RT 5**

300 GOVERNORS HIGHWAY  
SOUTH WINDSOR, CT 06074

EXISTING 165' MONOPOLE

ISSUED FOR:

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	12/03/20	BMM	FINAL	SS
1	01/20/21	BMM	GROUND AREA ADD	SS
2	01/26/21	SS	GROUND AREA REV	SS

STATE OF CONNECTICUT  
LUKEI SAKAN  
34916  
LICENSED PROFESSIONAL ENGINEER  
12621//

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SHEET NUMBER: **C-2** REVISION: **1**

T-MOBILE SITE NUMBER:  
**CT11279D**

BU #: **828054**  
**SOUTH WINDOR/RT 5**

300 GOVERNORS HIGHWAY  
SOUTH WINDSOR, CT 06074

EXISTING 165' MONOPOLE

ANTENNA SCHEDULE										
SECTOR	POS.	TECHNOLOGY	RAD CENTER	AZIMUTH	ANTENNA MANUFACTURER	ANTENNA MODEL	MECH. TILT	ELECT. TILT	TOWER MOUNTED EQUIPMENT	FEEDLINE TYPE
ALPHA	A1	L2100/L1900/G1900	166'	0°	ERICSSON	AIR32 B66A_B2A	0°	--	--	(1) 6X12 HCS HYBRID CABLE (SHARED)
ALPHA	A2	L600/L700/L1900 /U2100/N600	166'	0°	RFS	APXVAARR24_43-U-NA20	0°	--	(1) COMMSOCOPE - SDX1926Q-43 (1) GENERIC TWIN STYLE 1B - AWS (1) ERICSSON - RRUS 4449 B71+B85 (1) ERICSSON - RRUS 4415 B25	(2) 1-5/8" COAX (1) 6X12 HCS HYBRID CABLE (SHARED)
ALPHA	A3	L2500/N2500	166'	0°	ERICSSON	AIR6449 B41	0°	--	--	(1) 6X12 HCS HYBRID CABLE (SHARED)
BETA	B1	L2100/L1900/G1900	166'	120°	ERICSSON	AIR32 B66A_B2A	0°	--	--	(1) 6X12 HCS HYBRID CABLE (SHARED)
BETA	B2	L600/L700/L1900 /U2100/N600	166'	120°	RFS	APXVAARR24_43-U-NA20	0°	--	(1) COMMSOCOPE - SDX1926Q-43 (1) GENERIC TWIN STYLE 1B - AWS (1) ERICSSON - RRUS 4449 B71+B85 (1) ERICSSON - RRUS 4415 B25	(2) 1-5/8" COAX (1) 6X12 HCS HYBRID CABLE (SHARED)
BETA	B3	L2500/N2500	166'	120°	ERICSSON	AIR6449 B41	0°	--	--	(1) 6X12 HCS HYBRID CABLE (SHARED)
GAMMA	G1	L2100/L1900/G1900	166'	210°	ERICSSON	AIR32 B66A_B2A	0°	--	--	(1) 6X12 HCS HYBRID CABLE (SHARED)
GAMMA	G2	L600/L700/L1900 /U2100/N600	166'	210°	RFS	APXVAARR24_43-U-NA20	0°	--	(1) COMMSOCOPE - SDX1926Q-43 (1) GENERIC TWIN STYLE 1B - AWS (1) ERICSSON - RRUS 4449 B71+B85 (1) ERICSSON - RRUS 4415 B25	(2) 1-5/8" COAX (1) 6X12 HCS HYBRID CABLE (SHARED)
GAMMA	G3	L2500/N2500	166'	210°	ERICSSON	AIR6449 B41	0°	--	--	(1) 6X12 HCS HYBRID CABLE (SHARED)


1 ANTENNA AND CABLE SCHEDULE  
SCALE: NOT TO SCALE

**NOTE:**


- CONTRACTOR SHALL INSTALL 3RD DUAL RRH MOUNT TO ACCOMMODATE ALL RRH BRACKETS HOLES IF NECESSARY.

**INSTALLER NOTES:**

- COMPLY WITH MANUFACTURERS INSTRUCTIONS TO ENSURE THAT ALL RRHs RECEIVE ELECTRICAL POWER WITHIN 24 HOURS OF BEING REMOVED FROM THE MANUFACTURER'S PACKAGING.
- DO NOT OPEN RRH PACKAGES IN THE RAIN.
- ALL PIPES, BRACKETS, AND MISCELLANEOUS HARDWARE TO BE GALVANIZED UNLESS NOTED OTHERWISE.

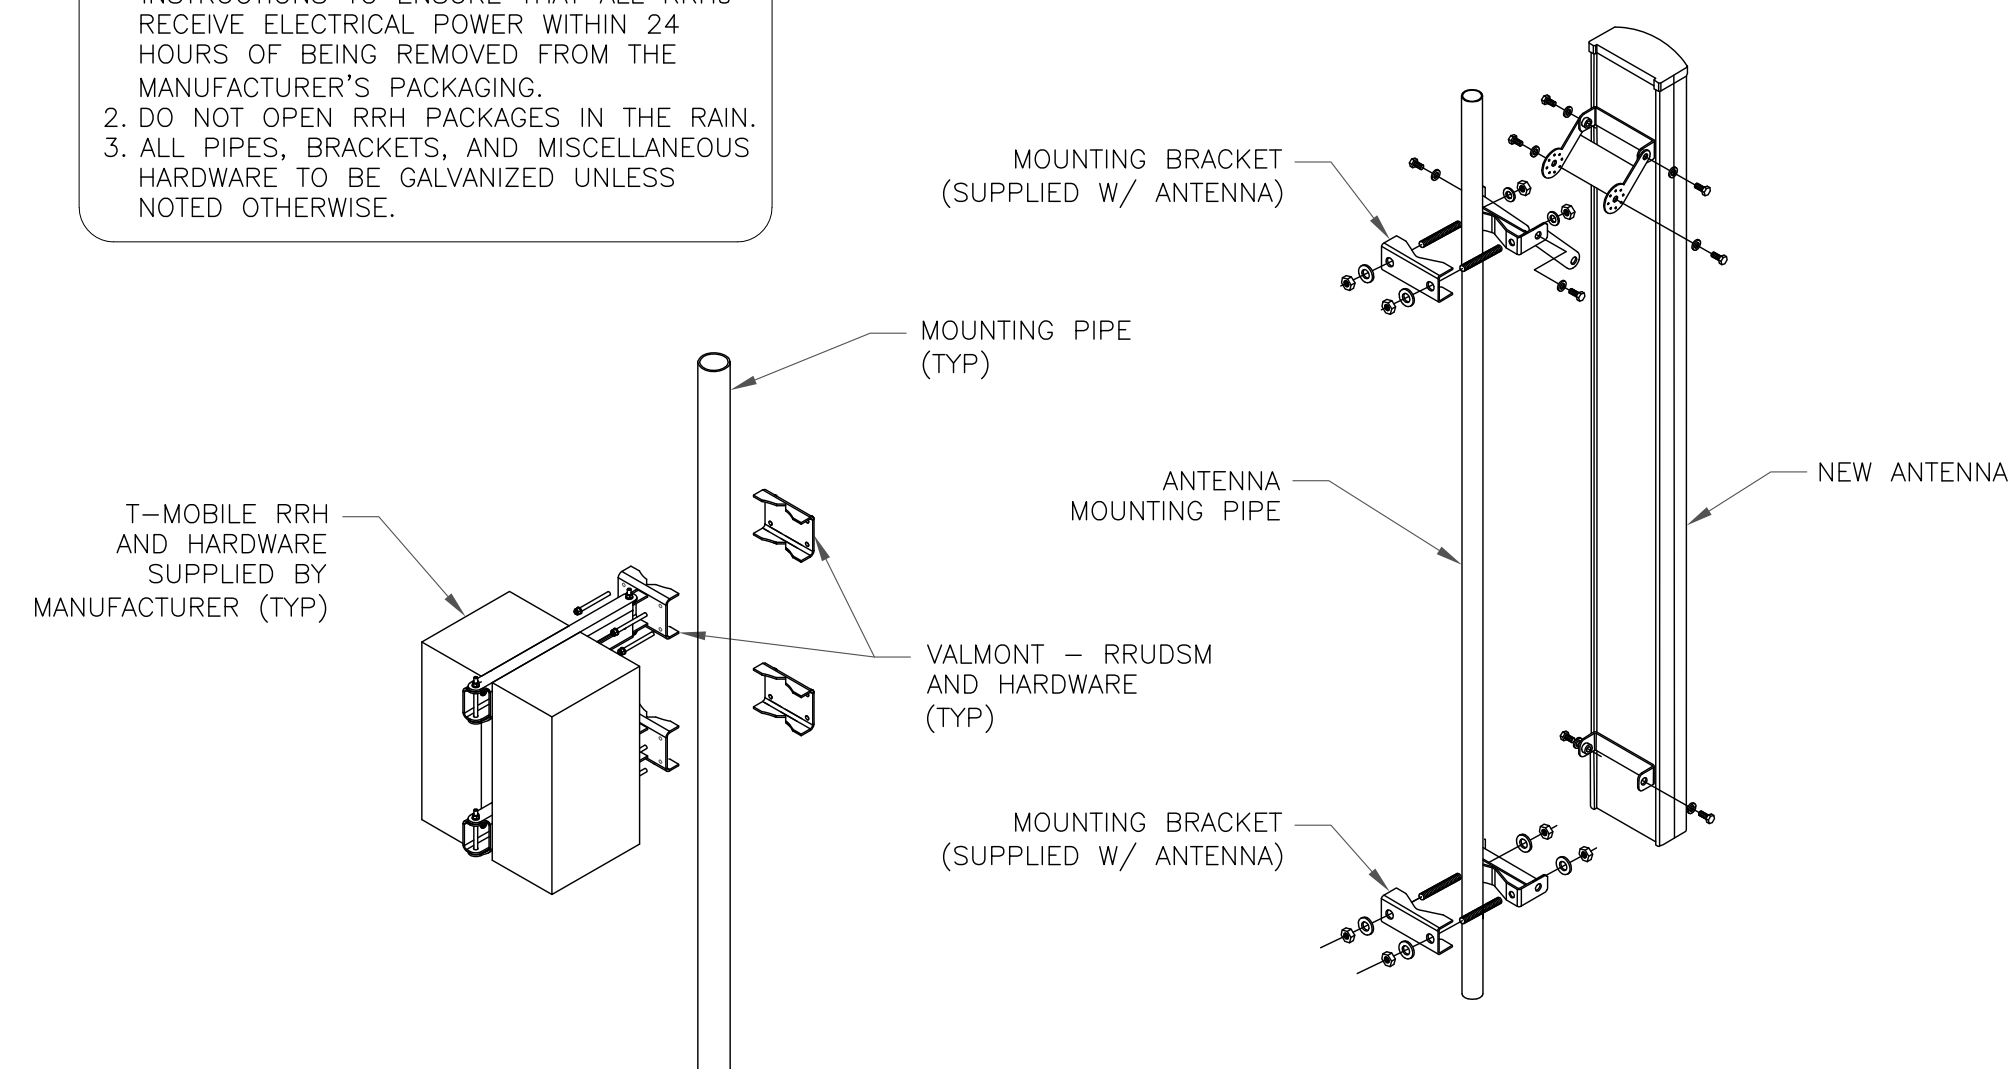

2 ANTENNA WITH RRHs MOUNTING DETAIL  
SCALE: NOT TO SCALE

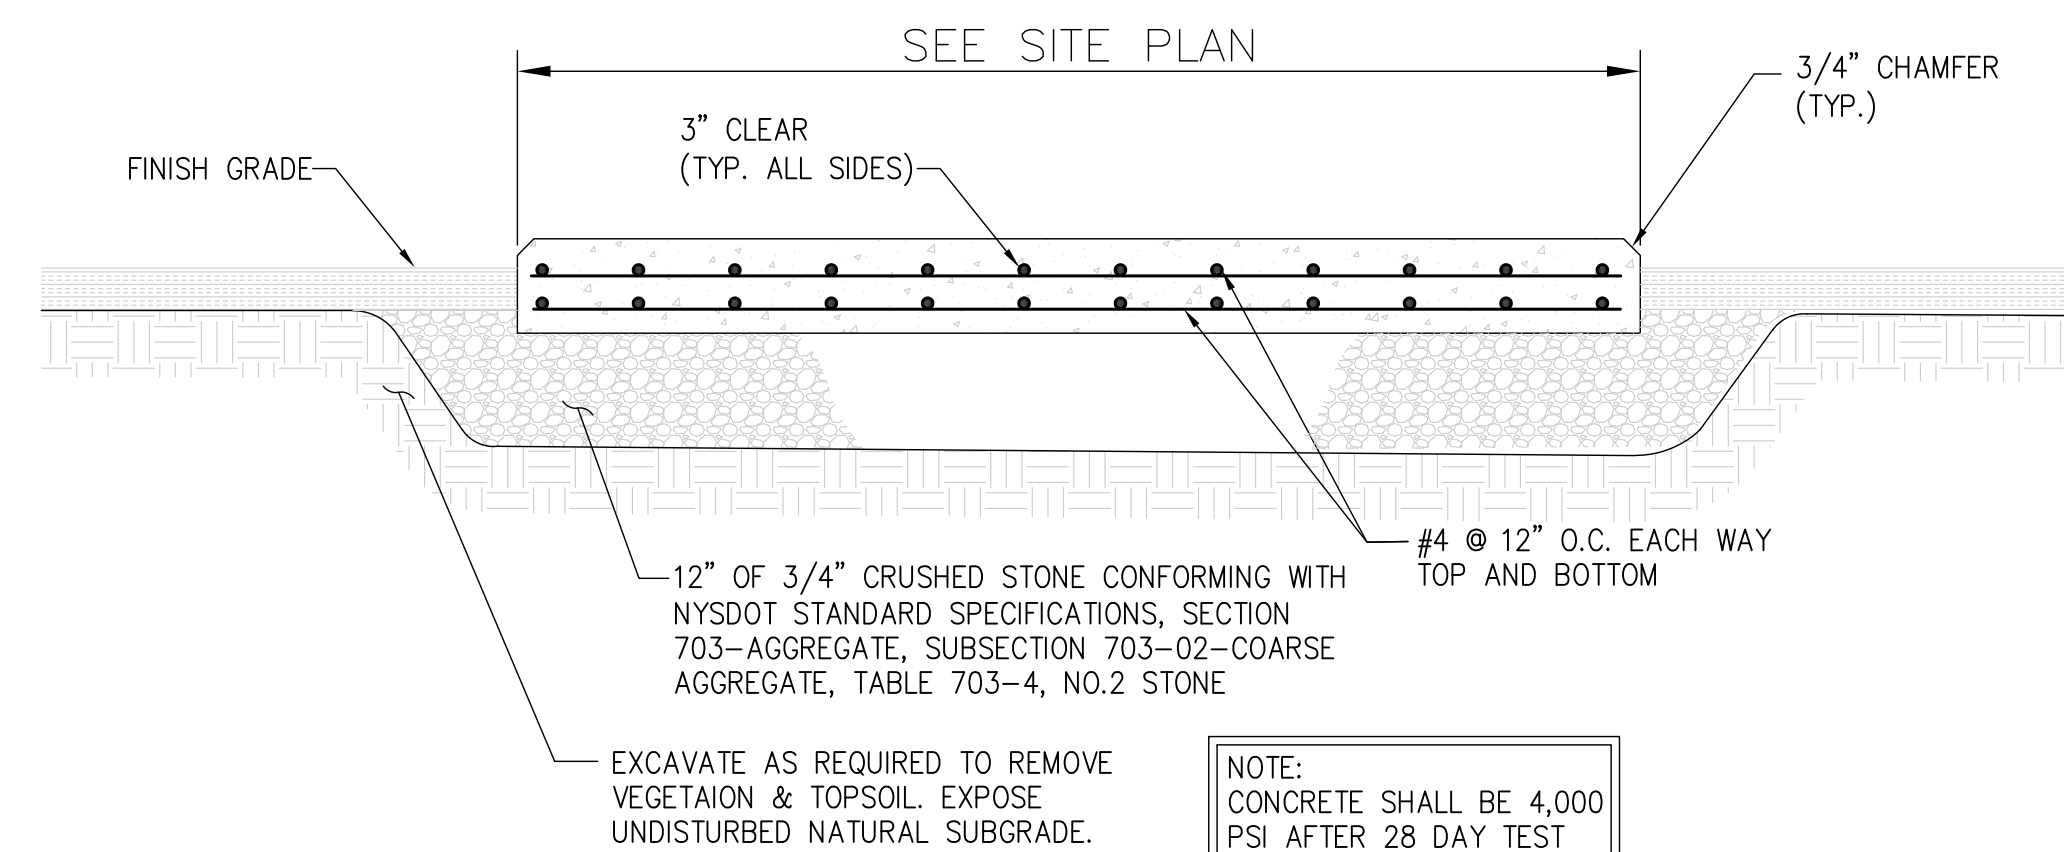


NOTE:  
CONCRETE SHALL BE 4,000 PSI AFTER 28 DAY TEST

3 FOUNDATION DETAIL  
SCALE: NOT TO SCALE

**ISSUED FOR:**


REV	DATE	DRWN	DESCRIPTION	DES./QA
0	12/03/20	BMM	FINAL	SS
1	01/20/21	BMM	GROUND AREA ADD	SS
2	01/26/21	SS	GROUND AREA REV	SS

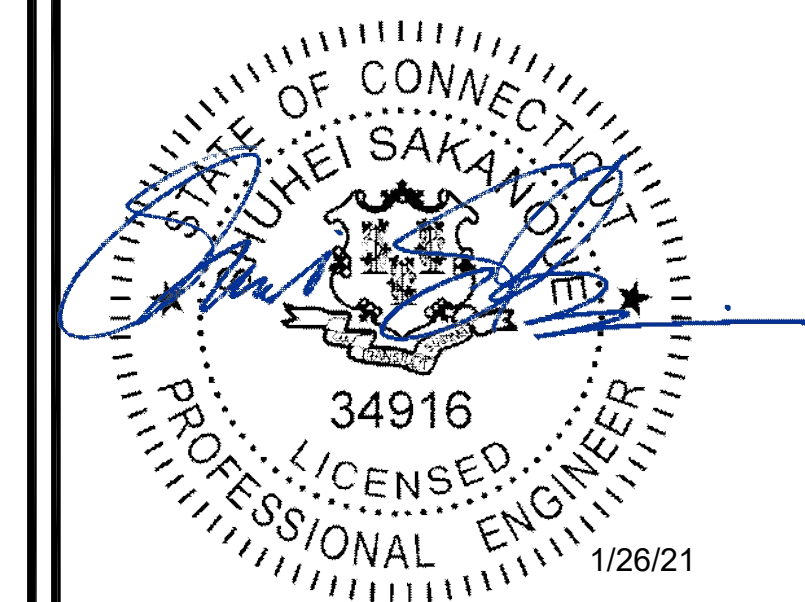

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SHEET NUMBER: **C-3** REVISION: **1**

67D5997DB\_2xAIR+1OP.JPG

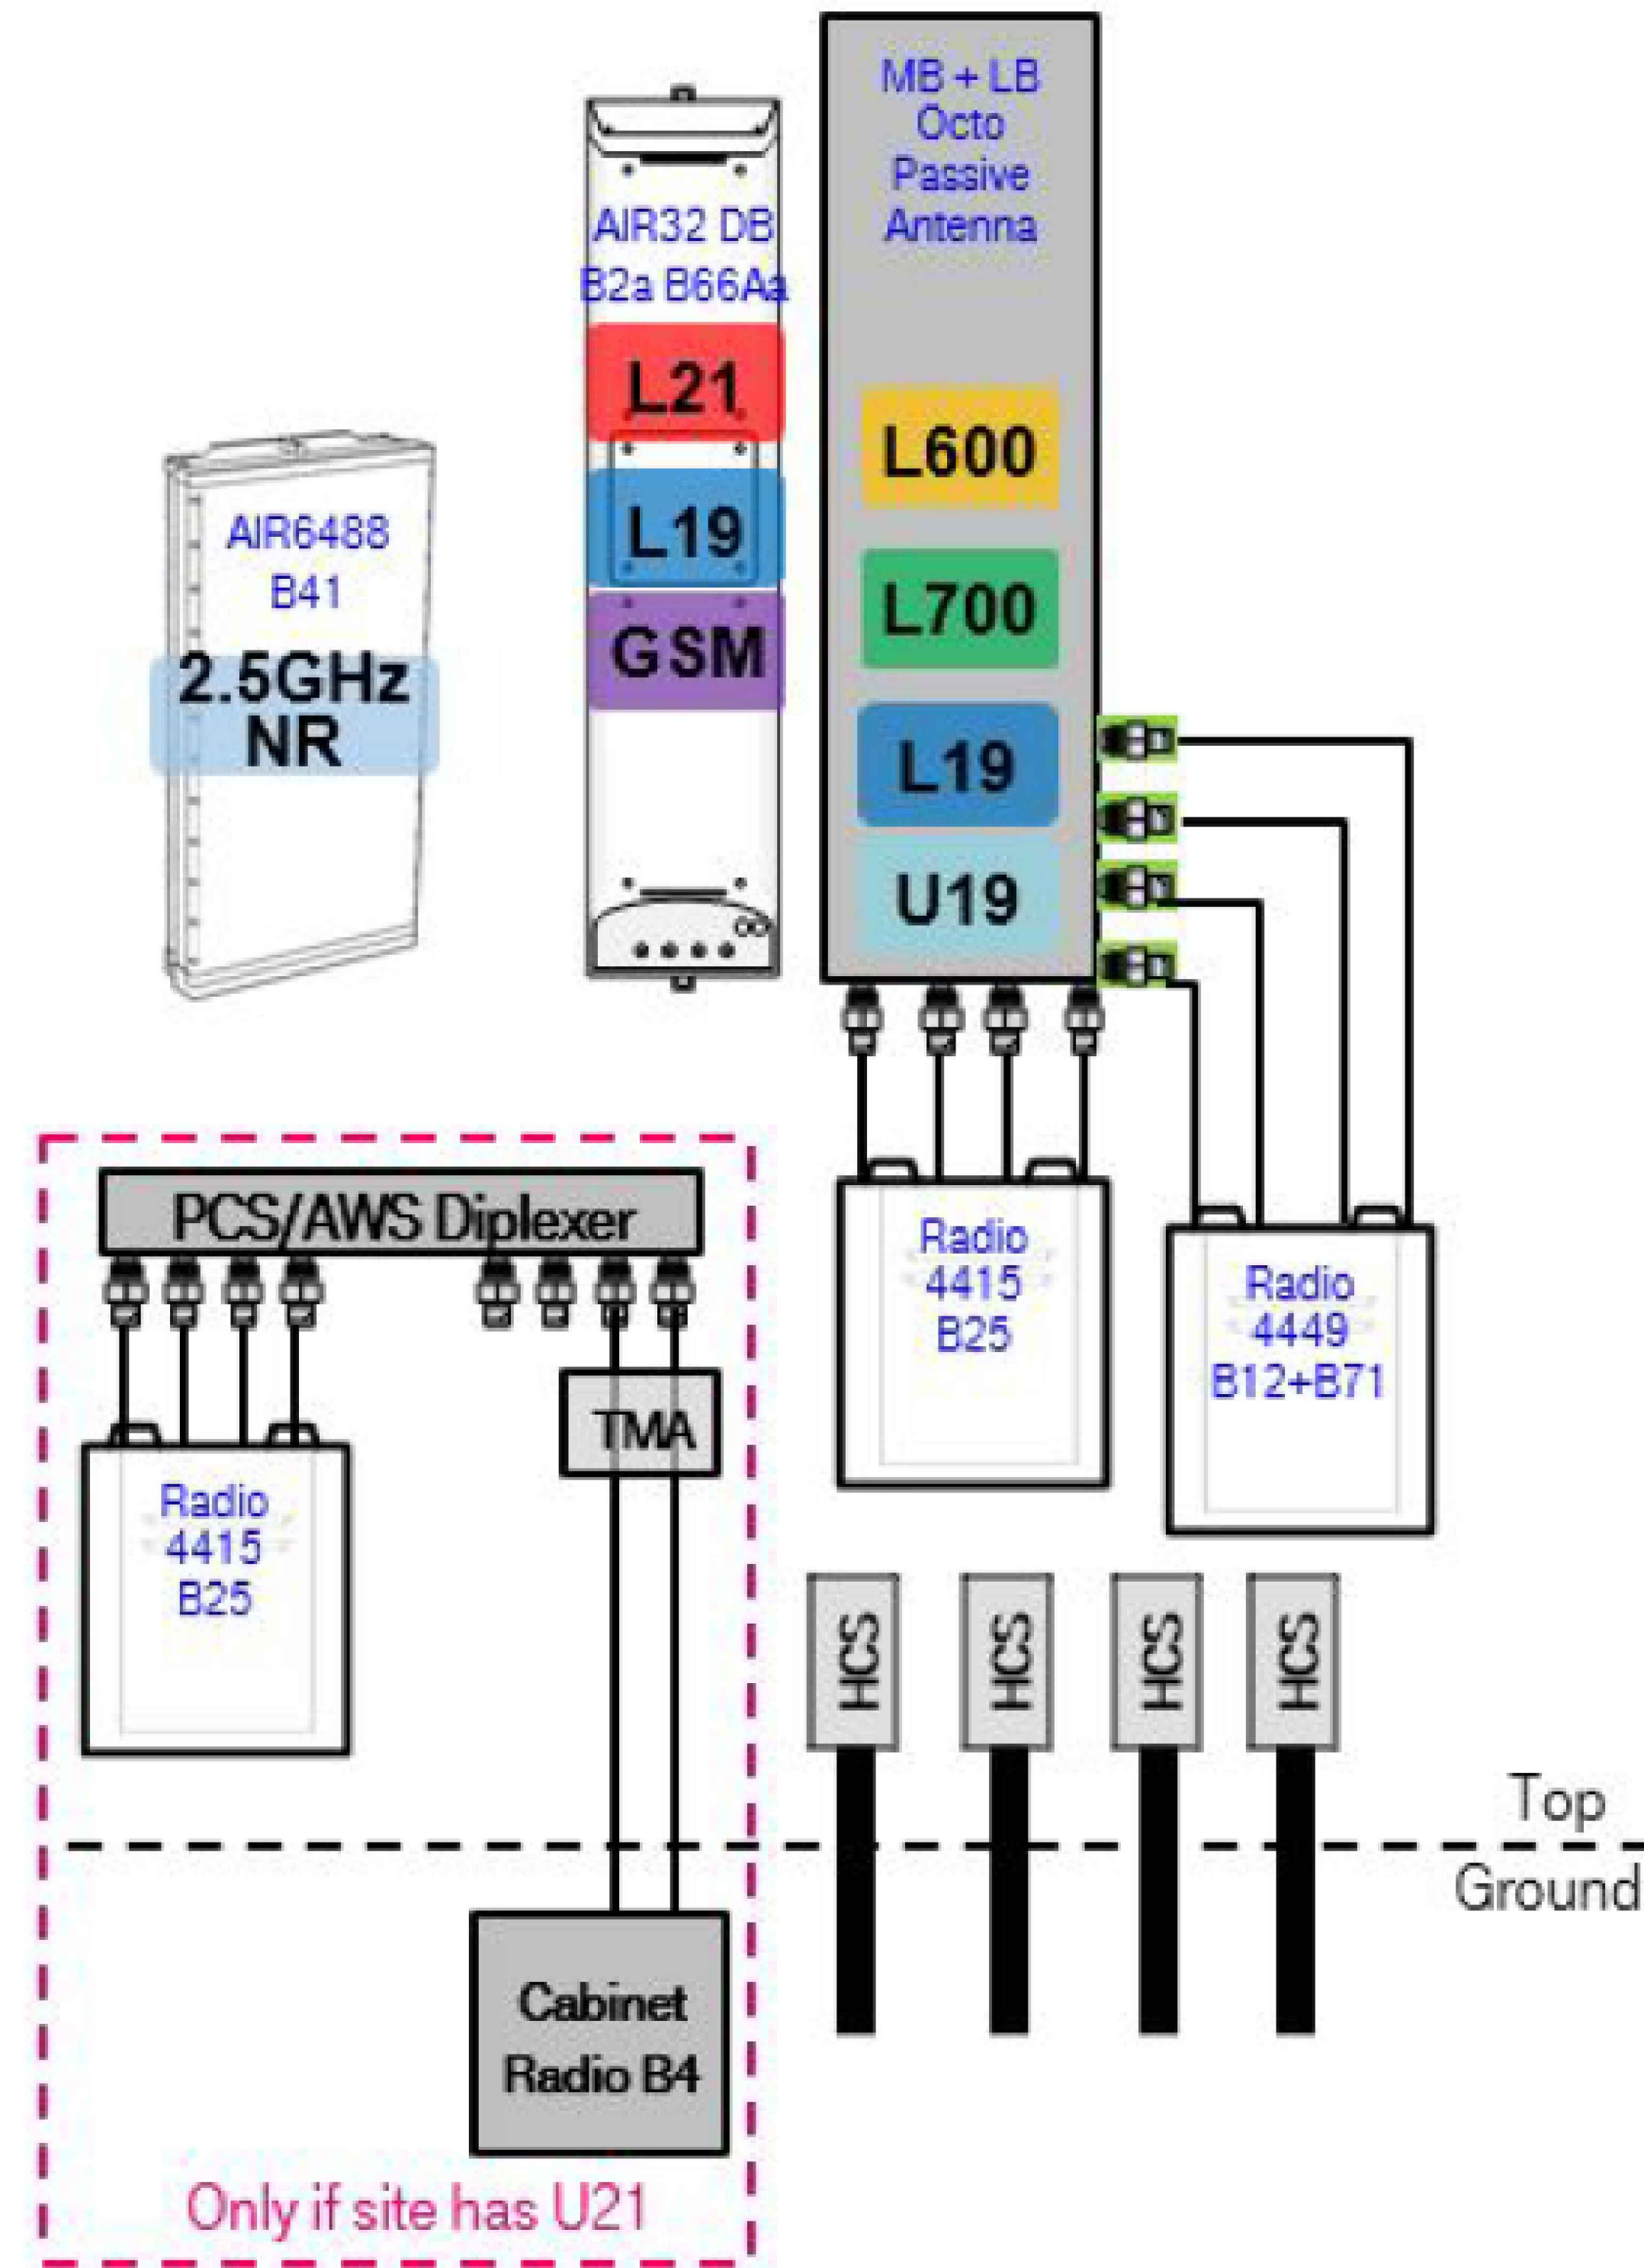

Notes:

1 PLUMBING DIAGRAM  
SCALE: NOT TO SCALE

T-Mobile

35 GRIFFIN ROAD  
BLOOMFIELD, CT 06002

CROWN CASTLE

3 CORPORATE PARK DRIVE, SUITE 101  
CLIFTON PARK, NY 12065

INFINIGY

FROM ZERO TO INFINIGY  
the solutions are endless

1033 Watervliet Shaker Rd | Albany, NY 12205  
Phone: 518-690-0790 | Fax: 518-690-0793  
www.infinigy.com

T-MOBILE SITE NUMBER:  
CT11279D


BU #: 828054  
SOUTH WINDOR/RT 5

300 GOVERNORS HIGHWAY  
SOUTH WINDSOR, CT 06074

EXISTING 165' MONOPOLE

ISSUED FOR:

REV	DATE	DRWN	DESCRIPTION	DES/QA
0	12/03/20	BMM	FINAL	SS
1	01/20/21	BMM	GROUND AREA ADD	SS
2	01/26/21	SS	GROUND AREA REV	SS

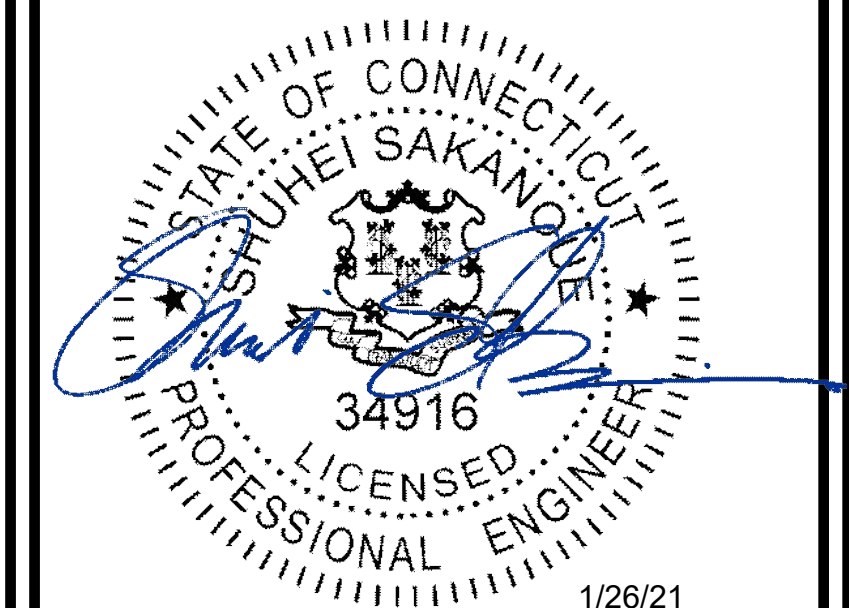

IT IS A VIOLATION OF LAW FOR ANY PERSON,  
UNLESS THEY ARE ACTING UNDER THE DIRECTION  
OF A LICENSED PROFESSIONAL ENGINEER,  
TO ALTER THIS DOCUMENT.


SHEET NUMBER:

C-4

REVISION:


1

MANUFACTURER: ERICSSON  
 MODEL: AIR6449 B41  
 WEIGHT: 104 LBS (W/ MOUNT BRACKET 113)  
 DIMENSIONS: 33.1"H. X 20.5"W. X 8.6"D.  
 FREQUENCY: REFER TO RF DATA SHEET

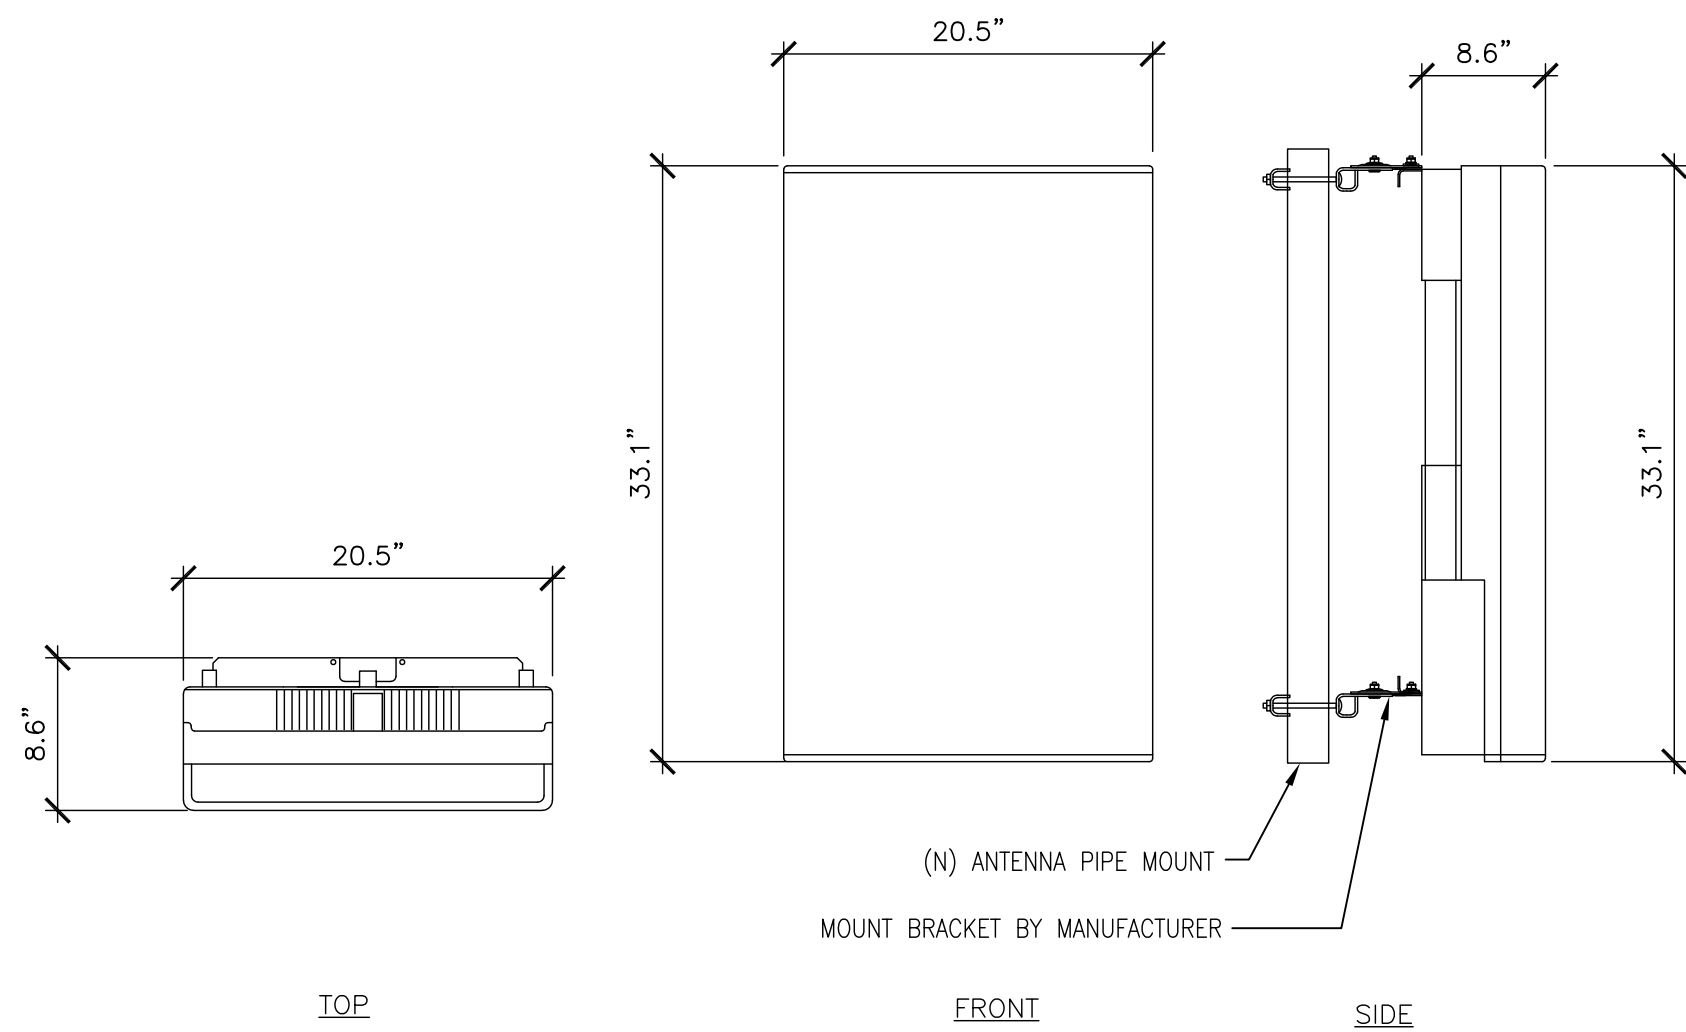


1 (N) AIR6449 B41 ANTENNA SPEC  
 SCALE: NOT TO SCALE

ERICSSON RADIO-4415 B25  
 DIMENSIONS, WxDxH: 13.2"x5.4"x14.9"  
 POWER CONSUMPTION: 660 WATTS  
 TOTAL WEIGHT: 46.3 lbs  
 TEMPERATURE: -40' TO 55' C

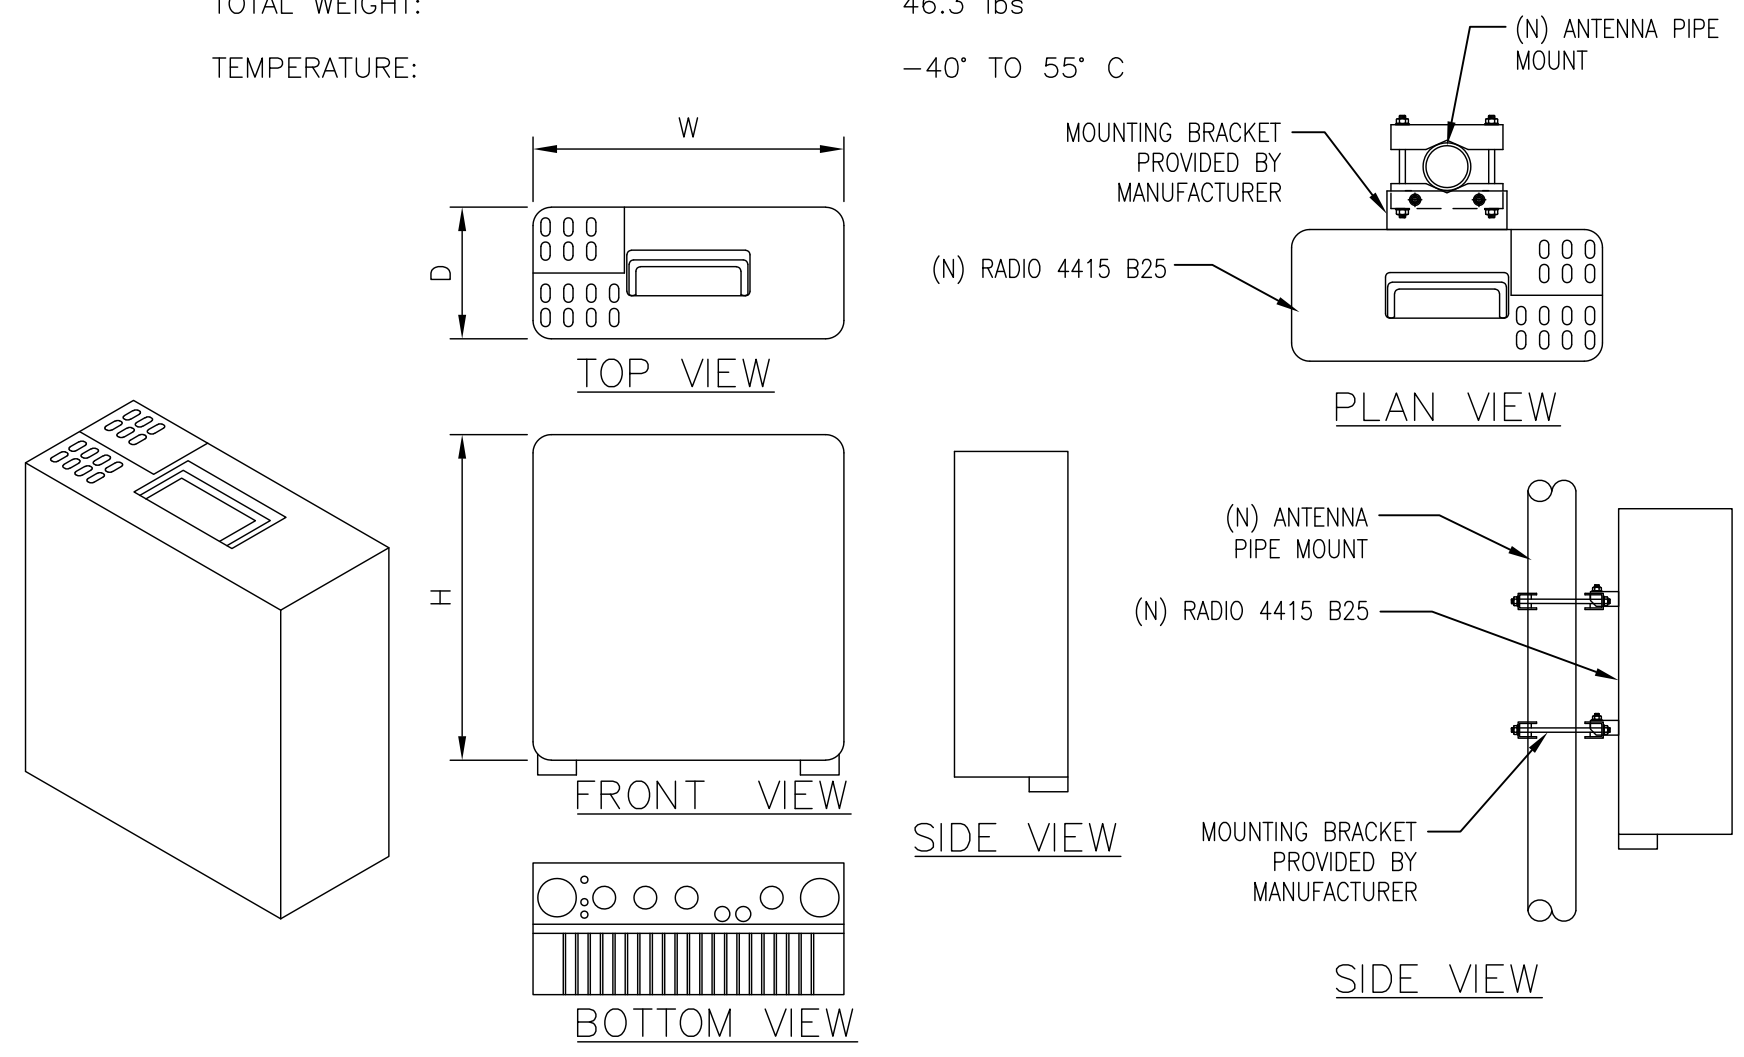


2 (N) RADIO 4415 B25 SPEC  
 SCALE: NOT TO SCALE

MANUFACTURER: COMMSCOPE  
 MODEL: SDX1926Q-43  
 WEIGHT: 6.17 LBS  
 DIMENSIONS: 6.9" X 4.2" X 2.9"  
 FREQUENCY: REFER TO RF DATA SHEET

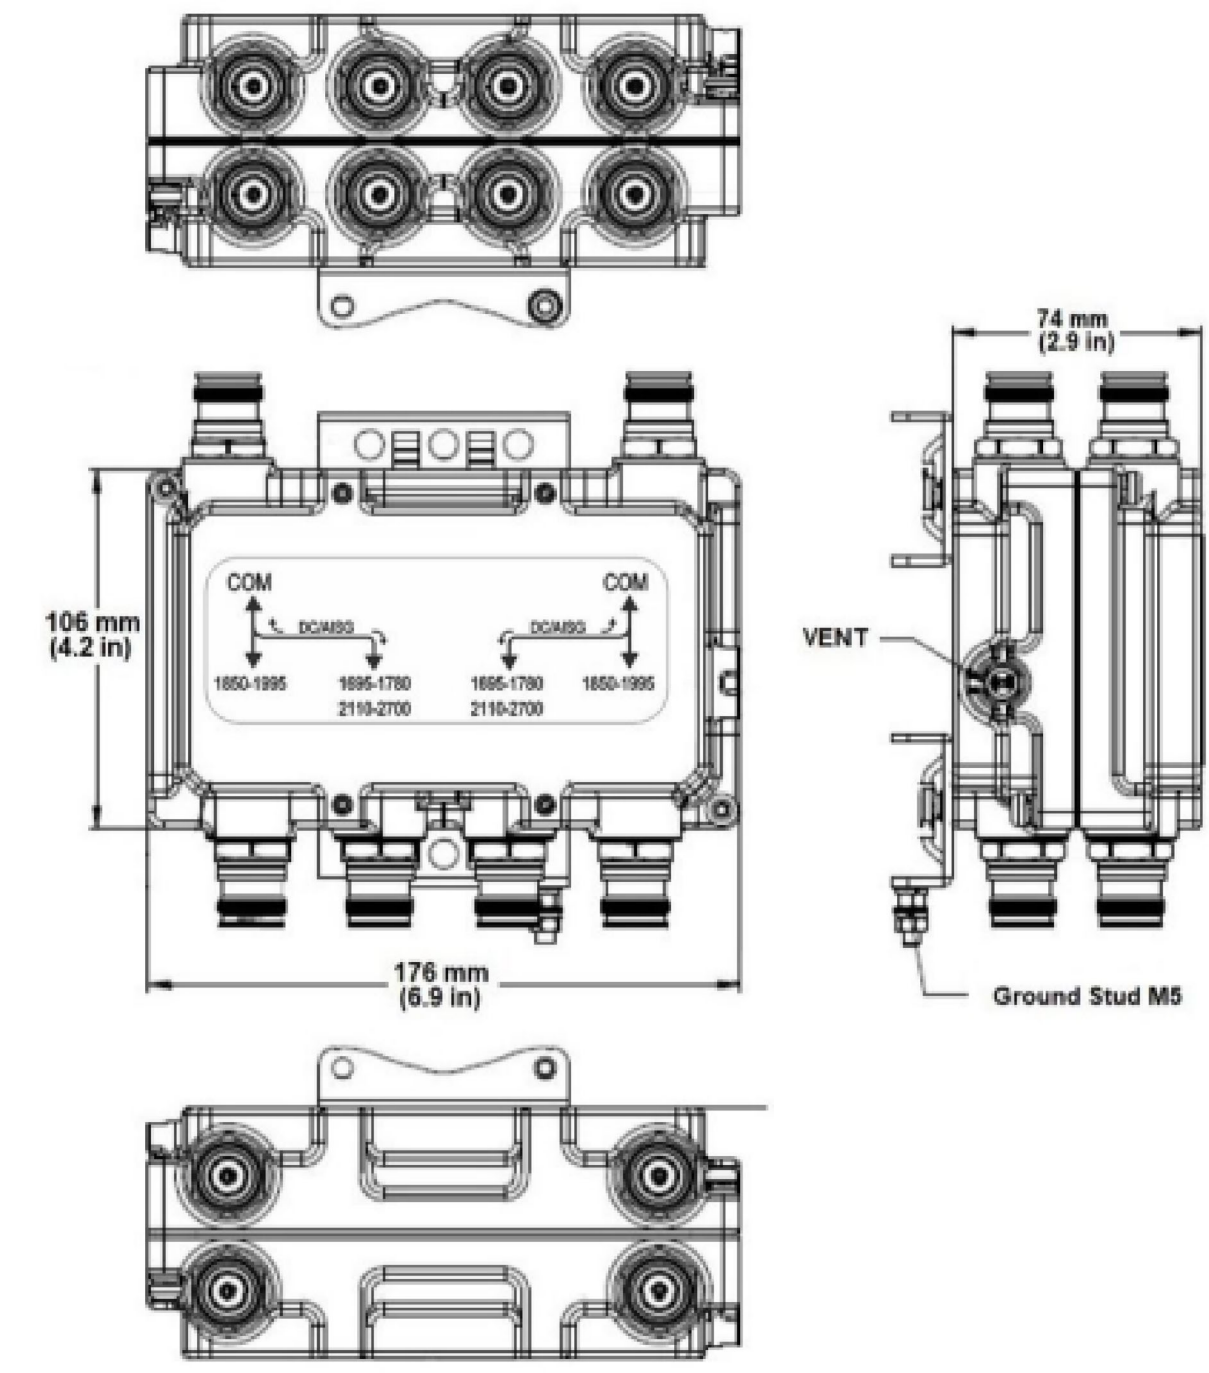


3 (N) DIPLEX SDX1926Q-43 SPEC  
 SCALE: NOT TO SCALE

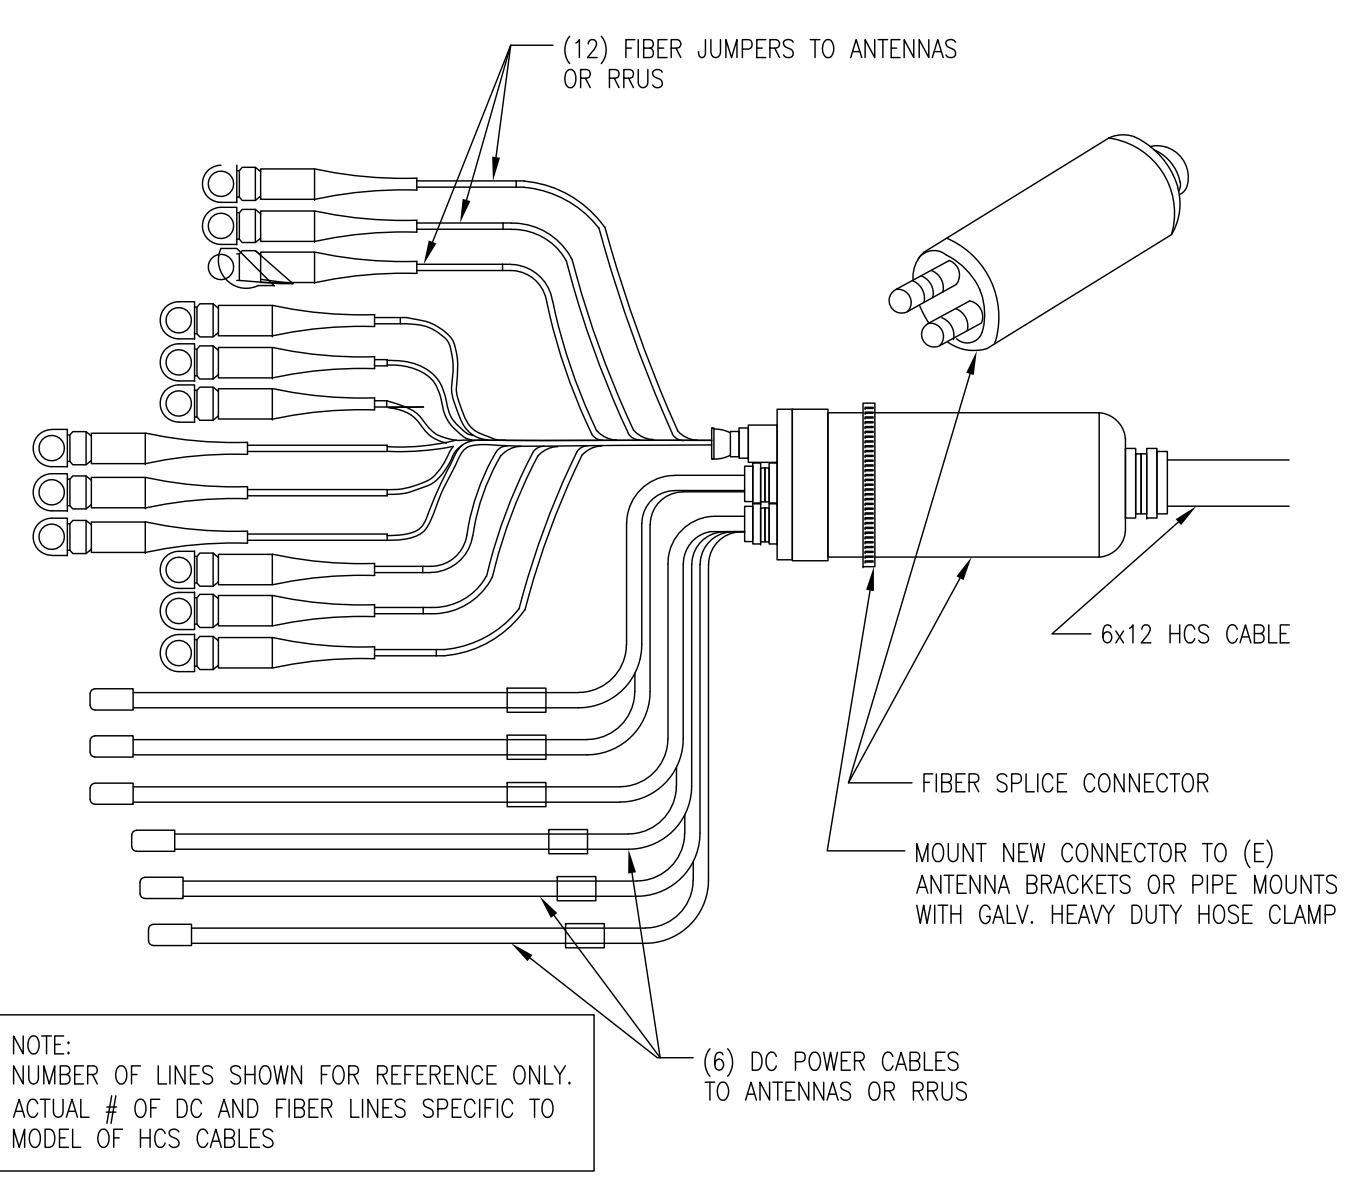


NOTE:  
 NUMBER OF LINES SHOWN FOR REFERENCE ONLY.  
 ACTUAL # OF DC AND FIBER LINES SPECIFIC TO  
 MODEL OF HCS CABLES

4 (N) 6X12 HCS CABLE DETAIL  
 SCALE: NOT TO SCALE

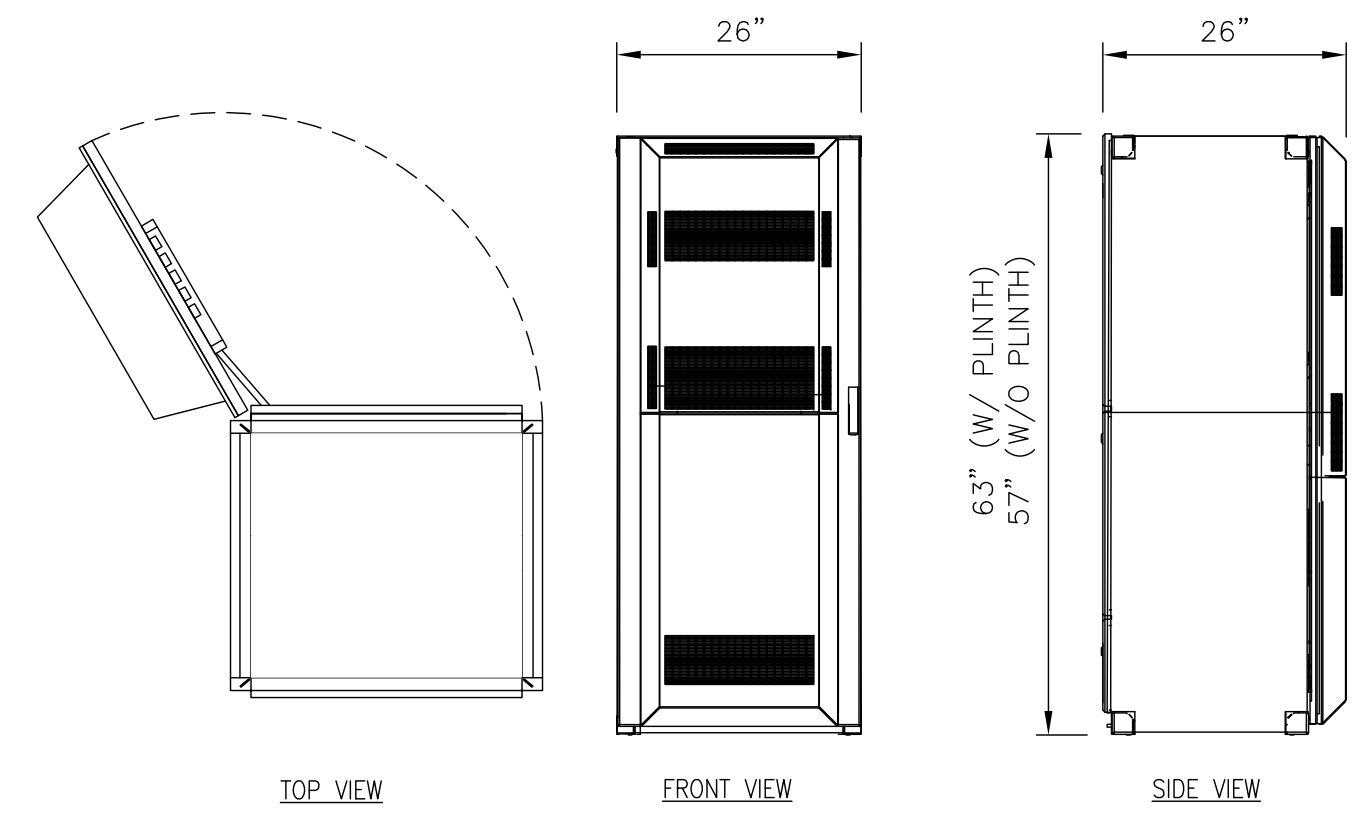

ERICSSON MODEL NO.:	B160
RACK SPACE:	19U
DIMENSIONS, HxWxD:	63"x26"x26" (W/ 6" PLINTH)
CABINET WEIGHT, EMPTY:	485 LBS
MAXIMUM WEIGHT:	2100± LBS

5 B160 CABINET DETAIL  
 SCALE: NOT TO SCALE

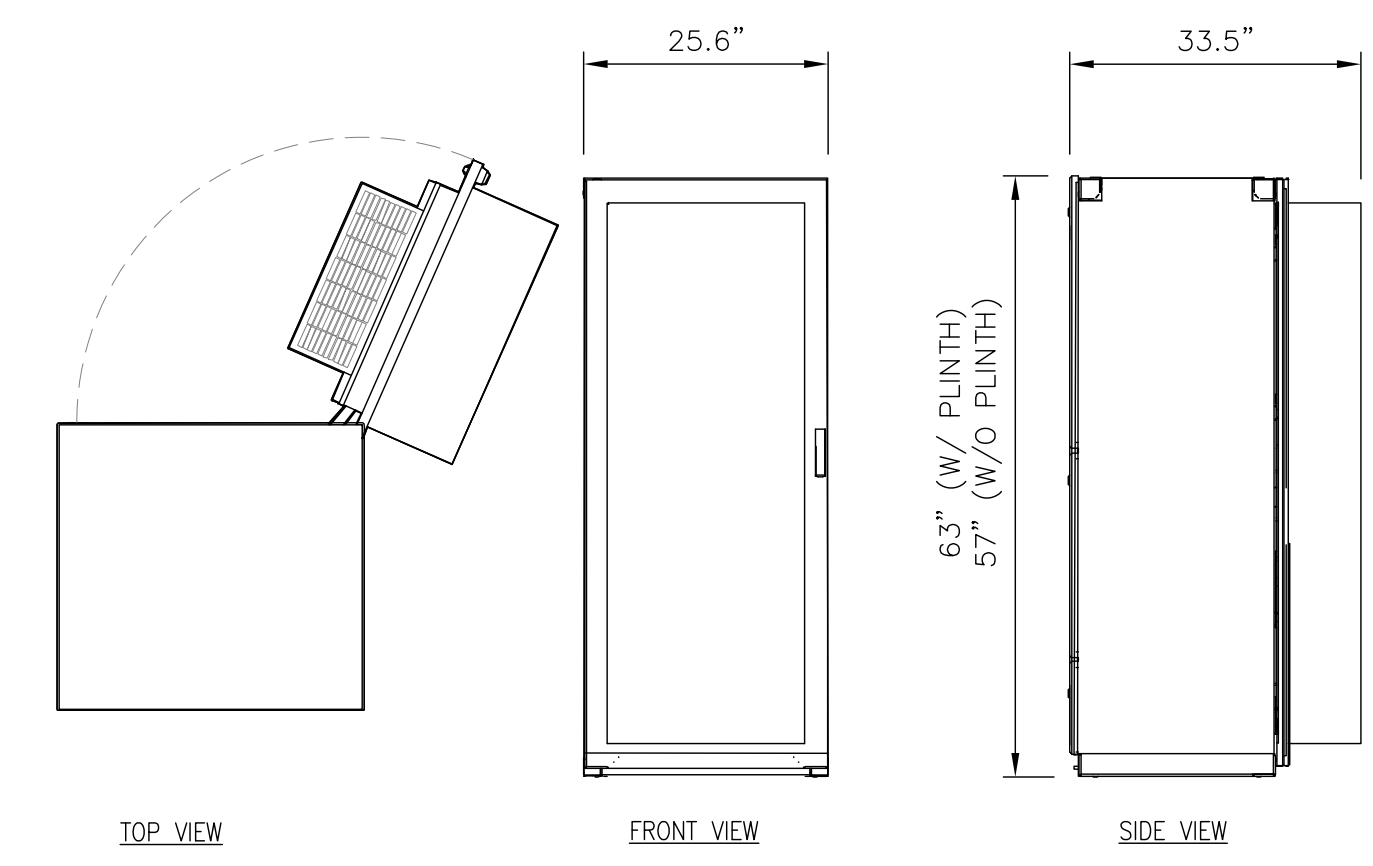

ERICSSON MODEL NO.:	6160
RACK SPACE:	19U
DIMENSIONS, HxWxD:	63"x25.6"x25.6" (W/ 6" PLINTH)
CABINET WEIGHT, EMPTY:	410 LBS
MAXIMUM WEIGHT:	770± LBS

6 6160 CABINET DETAIL  
 SCALE: NOT TO SCALE

**T-Mobile**  
 35 GRIFFIN ROAD  
 BLOOMFIELD, CT 06002


**CROWN CASTLE**  
 3 CORPORATE PARK DRIVE, SUITE 101  
 CLIFTON PARK, NY 12065

**INFINIGY**  
 FROM ZERO TO INFINIGY  
 the solutions are endless  
 1033 Watervliet Shaker Rd | Albany, NY 12205  
 Phone: 518-690-0790 | Fax: 518-690-0793  
 www.infinigy.com

T-MOBILE SITE NUMBER:  
**CT11279D**  
 BU #: **828054**  
**SOUTH WINDOR/RT 5**  
 300 GOVERNORS HIGHWAY  
 SOUTH WINDSOR, CT 06074  
 EXISTING 165' MONOPOLE

ISSUED FOR:

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	12/03/20	BMM	FINAL	SS
1	01/20/21	BMM	GROUND AREA ADD	SS
2	01/26/21	SS	GROUND AREA REV	SS

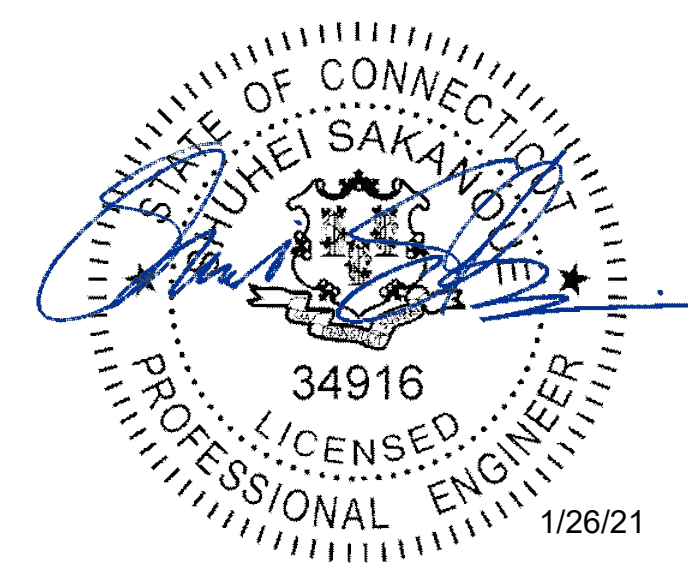

IT IS A VIOLATION OF LAW FOR ANY PERSON,  
 UNLESS THEY ARE ACTING UNDER THE DIRECTION  
 OF A LICENSED PROFESSIONAL ENGINEER,  
 TO ALTER THIS DOCUMENT.


SHEET NUMBER: **C-5** REVISION: **1**

T-MOBILE PANEL SCHEDULE												
MAIN: 200A MAIN BREAKER			VOTAGE/PHASE: 120/240V, 1-PHASE, 3-WIRE				SHORT CIRCUIT CURRENT RATING: --					
MOUNTING: INSIDE PPC ENCLOSURE			ENCLOSURE: NEMA 3R				SURGE PROTECTION DEVICE: YES					
DESCRIPTION	LOAD (VA)	C or NC	C/B	CIR No.	PHASE LOADS (VA)		CIR No.	C/B	C or NC	LOAD (VA)	DESCRIPTION	
					A	B						
SURGE SUPPRESSOR	0	NC	60	1	180	200	2	20	NC	180	GFCI	
	0	NC		3			4	20	NC	200	Lighting	
6301 (RENAME TO 6131)	9000	C	150	5	11000		6	100	C	2000	6160**	
	9000	C		7		11000	8		C	2000		
BLANK				9	180		10	20	NC	180	6160 GFCI*	
				11	0	0	12					
				13	0	0	14					
				15	0	0	16					
				17	0	0	18					
				19	0	0	20					
				21	0	0	22					
				23	0	0	24					
	BASE LOAD (VA) =				11360	11200						
	25% OF CONTINUOUS LOAD (VA) =				2750	2750						
TOTAL LOAD (VA) =				14110	13950							
TOTAL LOAD (A) =				118	117							

C = CONTINUOUS LOAD; NC = NON-CONTINUOUS LOAD  
 \* REMOVE WIRE TO EXISTING BREAKER AND MARK AS SPARE  
 \*\*INDICATES NEW LOAD. ALL OTHER LOADS ARE EXISTING.  
 NEW BREAKER TO BE SAME TYPE AND HAVE SAME AIC RATING AS EXISTING. CUSTOMER HAS NOT PROVIDED LOADS FOR EQUIPMENT CABINETS THEREFORE THE CABINET LOADS SHOWN ARE ESTIMATED

NOTES:

- ALL NEW CONDUCTORS TO BE INSTALLED SHALL BE COPPER. ALL CONDUCTORS SHALL BE THHW, THWN, THWN-2, XHHW, OR XHHW-2 UNLESS NOTED OTHERWISE.
- CONTRACTOR IS TO FIELD VERIFY ALL EXISTING ITEMS SHOWN ON THE ELECTRICAL ONE-LINE DIAGRAM AND NOTIFY THE ENGINEER OF ANY DISCREPANCIES.
- ALL GROUNDING AND BONDING PER THE NEC.

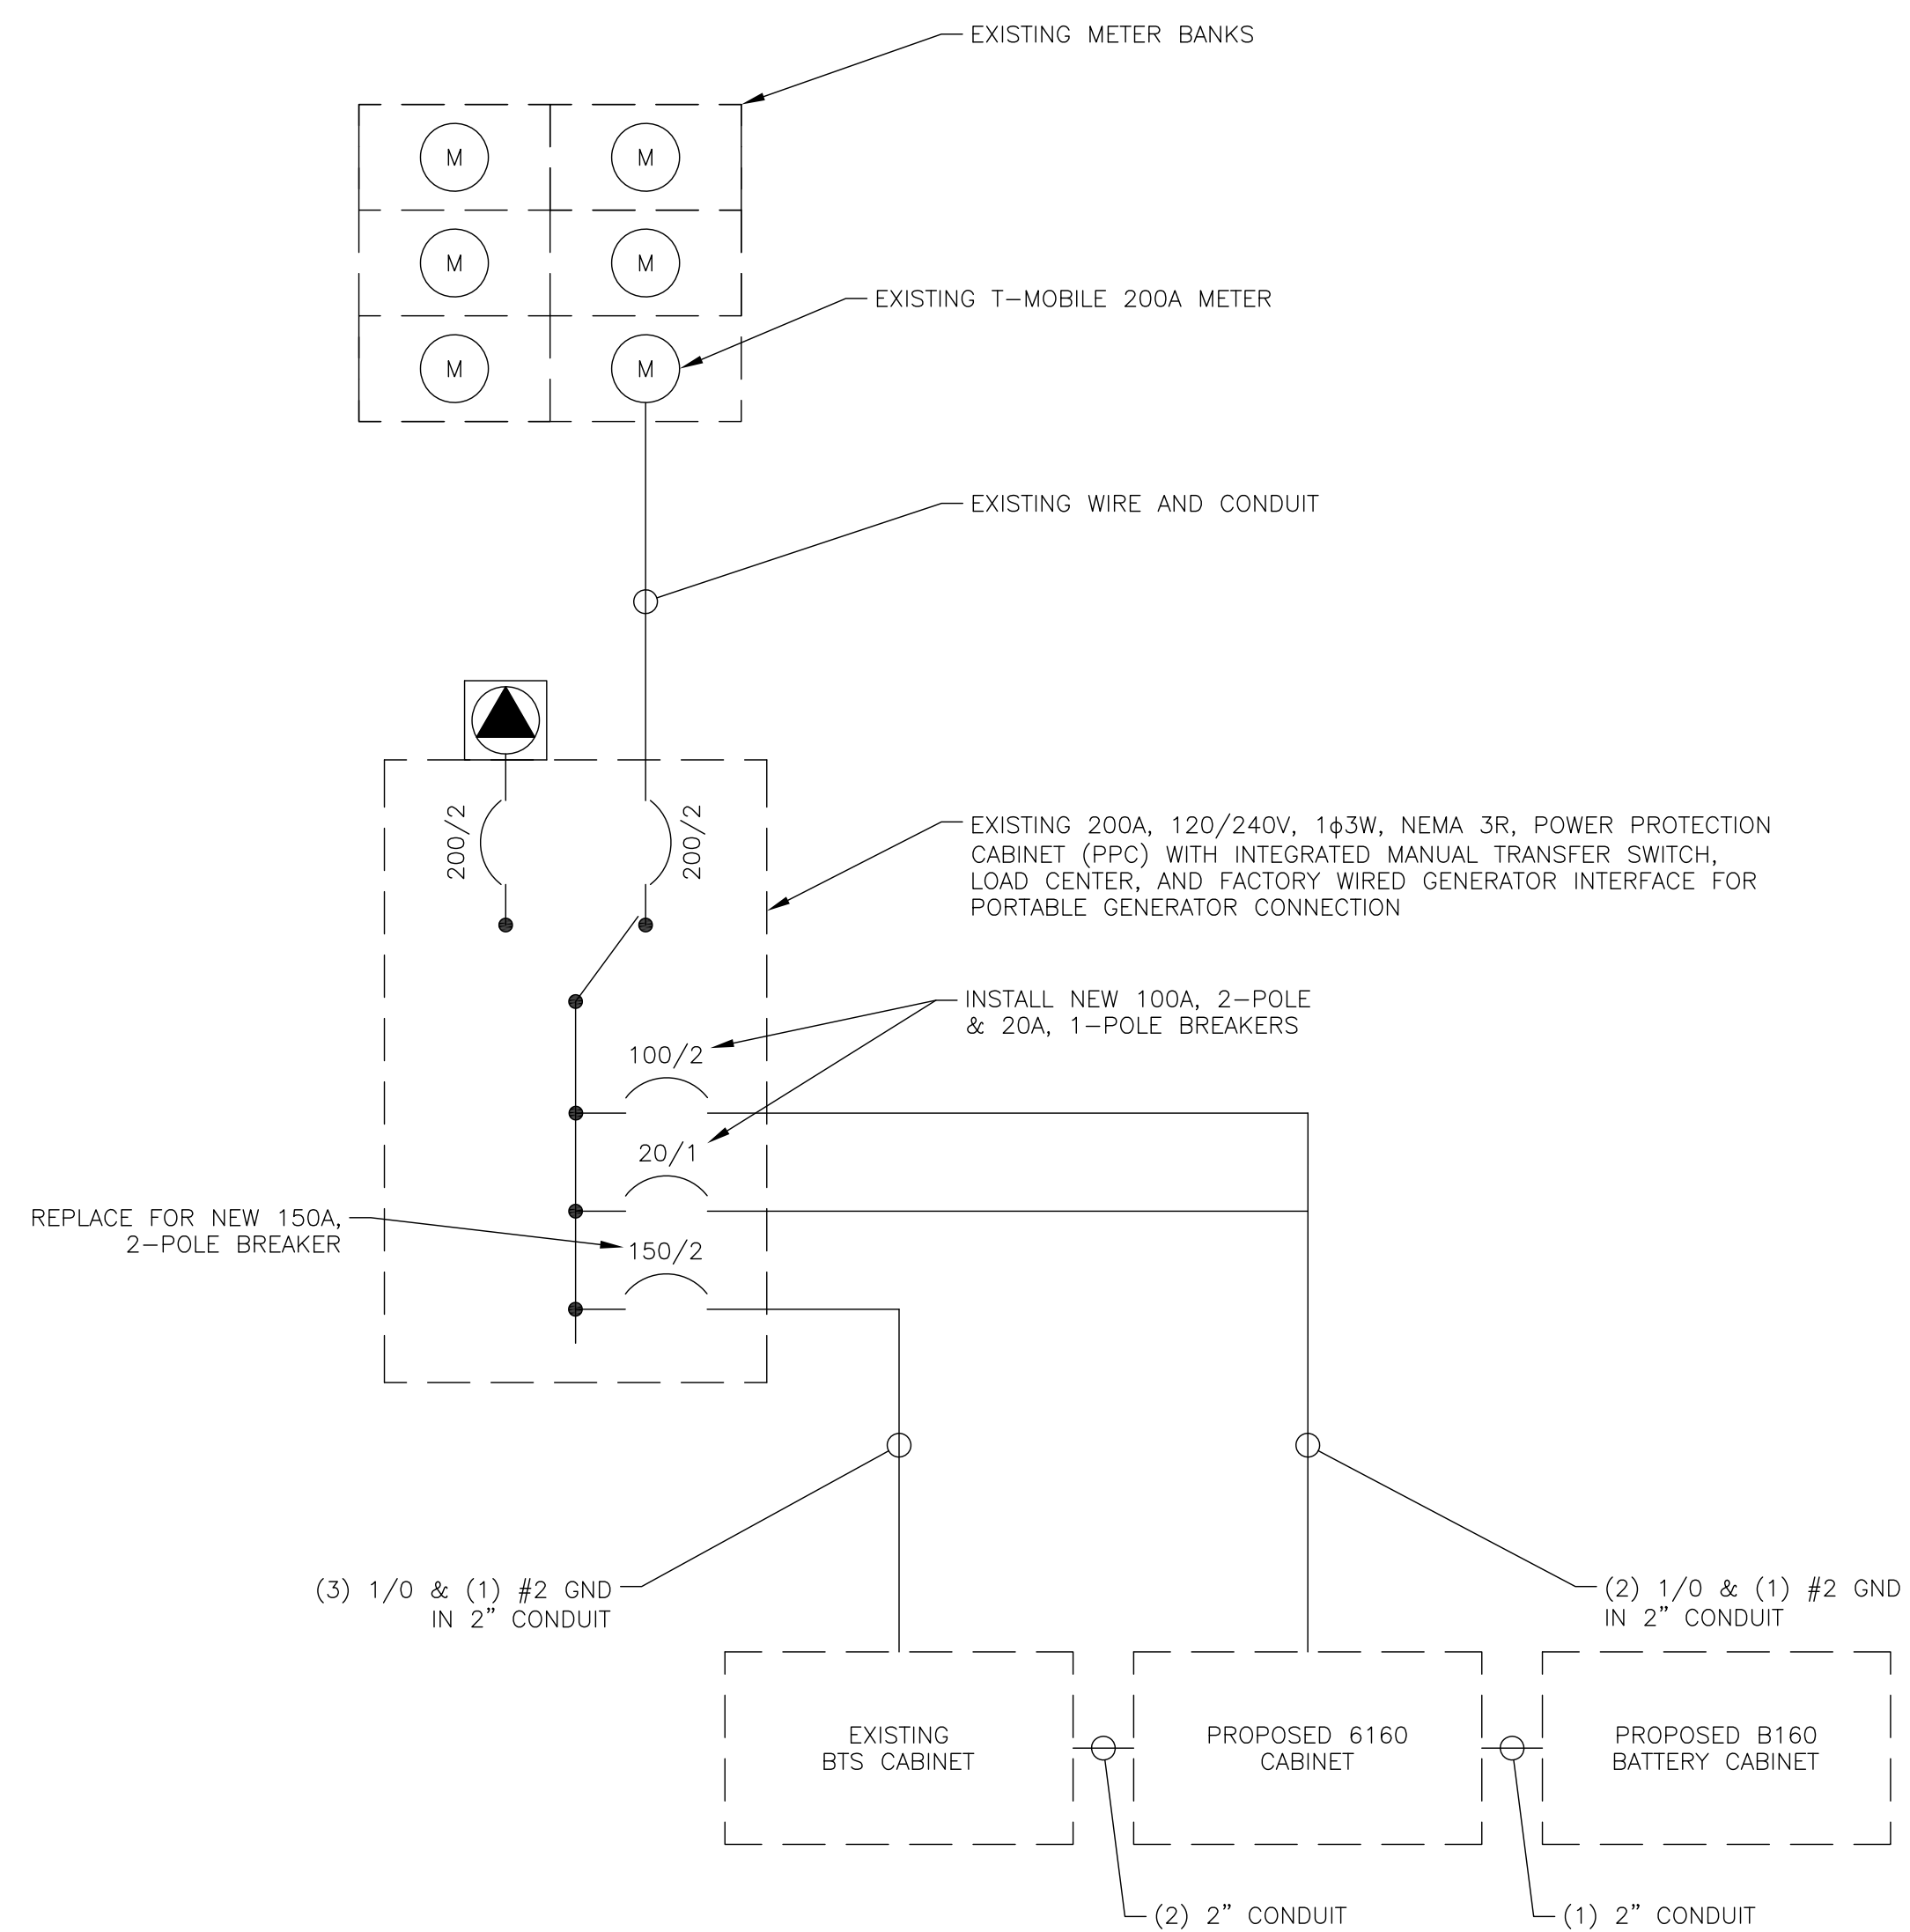

T-Mobile

35 GRIFFIN ROAD  
BLOOMFIELD, CT 06002

CROWN CASTLE

3 CORPORATE PARK DRIVE, SUITE 101  
CLIFTON PARK, NY 12065

INFINIGY

FROM ZERO TO INFINIGY  
the solutions are endless

1033 Watervliet Shaker Rd | Albany, NY 12205  
Phone: 518-690-0790 | Fax: 518-690-0793  
www.infinigy.com

T-MOBILE SITE NUMBER:  
CT11279D


BU #: 828054  
SOUTH WINDOR/RT 5

300 GOVERNORS HIGHWAY  
SOUTH WINDSOR, CT 06074

EXISTING 165' MONOPOLE

ISSUED FOR:

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	12/03/20	BMM	FINAL	SS
1	01/20/21	BMM	GROUND AREA ADD	SS
2	01/26/21	SS	GROUND AREA REV	SS

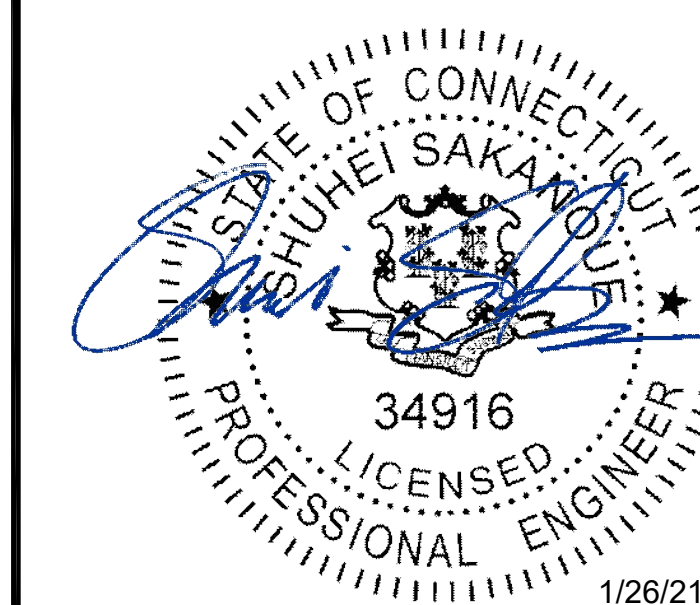

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SHEET NUMBER:

E-1

REVISION:

1

T-Mobile

35 GRIFFIN ROAD  
BLOOMFIELD, CT 06002

CROWN  
CASTLE

3 CORPORATE PARK DRIVE, SUITE 101  
CLIFTON PARK, NY 12065

INFINIGY

FROM ZERO TO INFINIGY  
the solutions are endless

1033 Watervliet Shaker Rd | Albany, NY 12205  
Phone: 518-690-0790 | Fax: 518-690-0793  
www.infinigy.com

T-MOBILE SITE NUMBER:  
CT11279D


BU #: 828054  
SOUTH WINDOR/RT 5

300 GOVERNORS HIGHWAY  
SOUTH WINDSOR, CT 06074

EXISTING 165' MONOPOLE

ISSUED FOR:

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	12/03/20	BMM	FINAL	SS
1	01/20/21	BMM	GROUND AREA ADD	SS
2	01/26/21	SS	GROUND AREA REV	SS

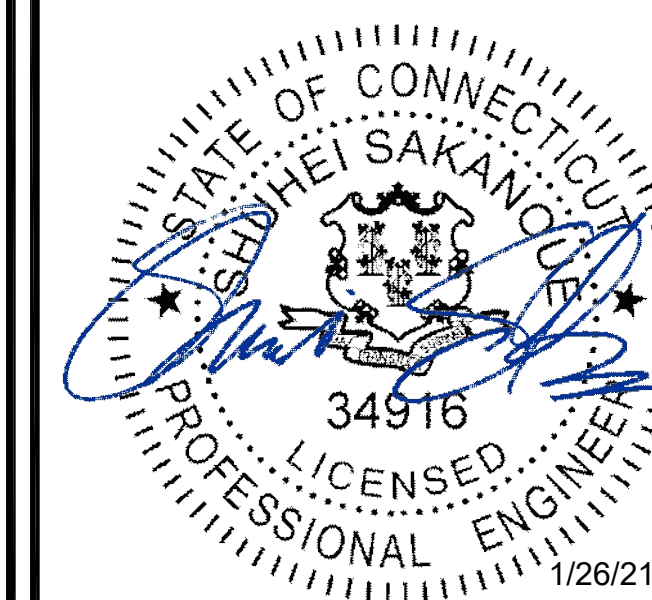


IT IS A VIOLATION OF LAW FOR ANY PERSON,  
UNLESS THEY ARE ACTING UNDER THE DIRECTION  
OF A LICENSED PROFESSIONAL ENGINEER,  
TO ALTER THIS DOCUMENT.

SHEET NUMBER: REVISION:

G-1


1

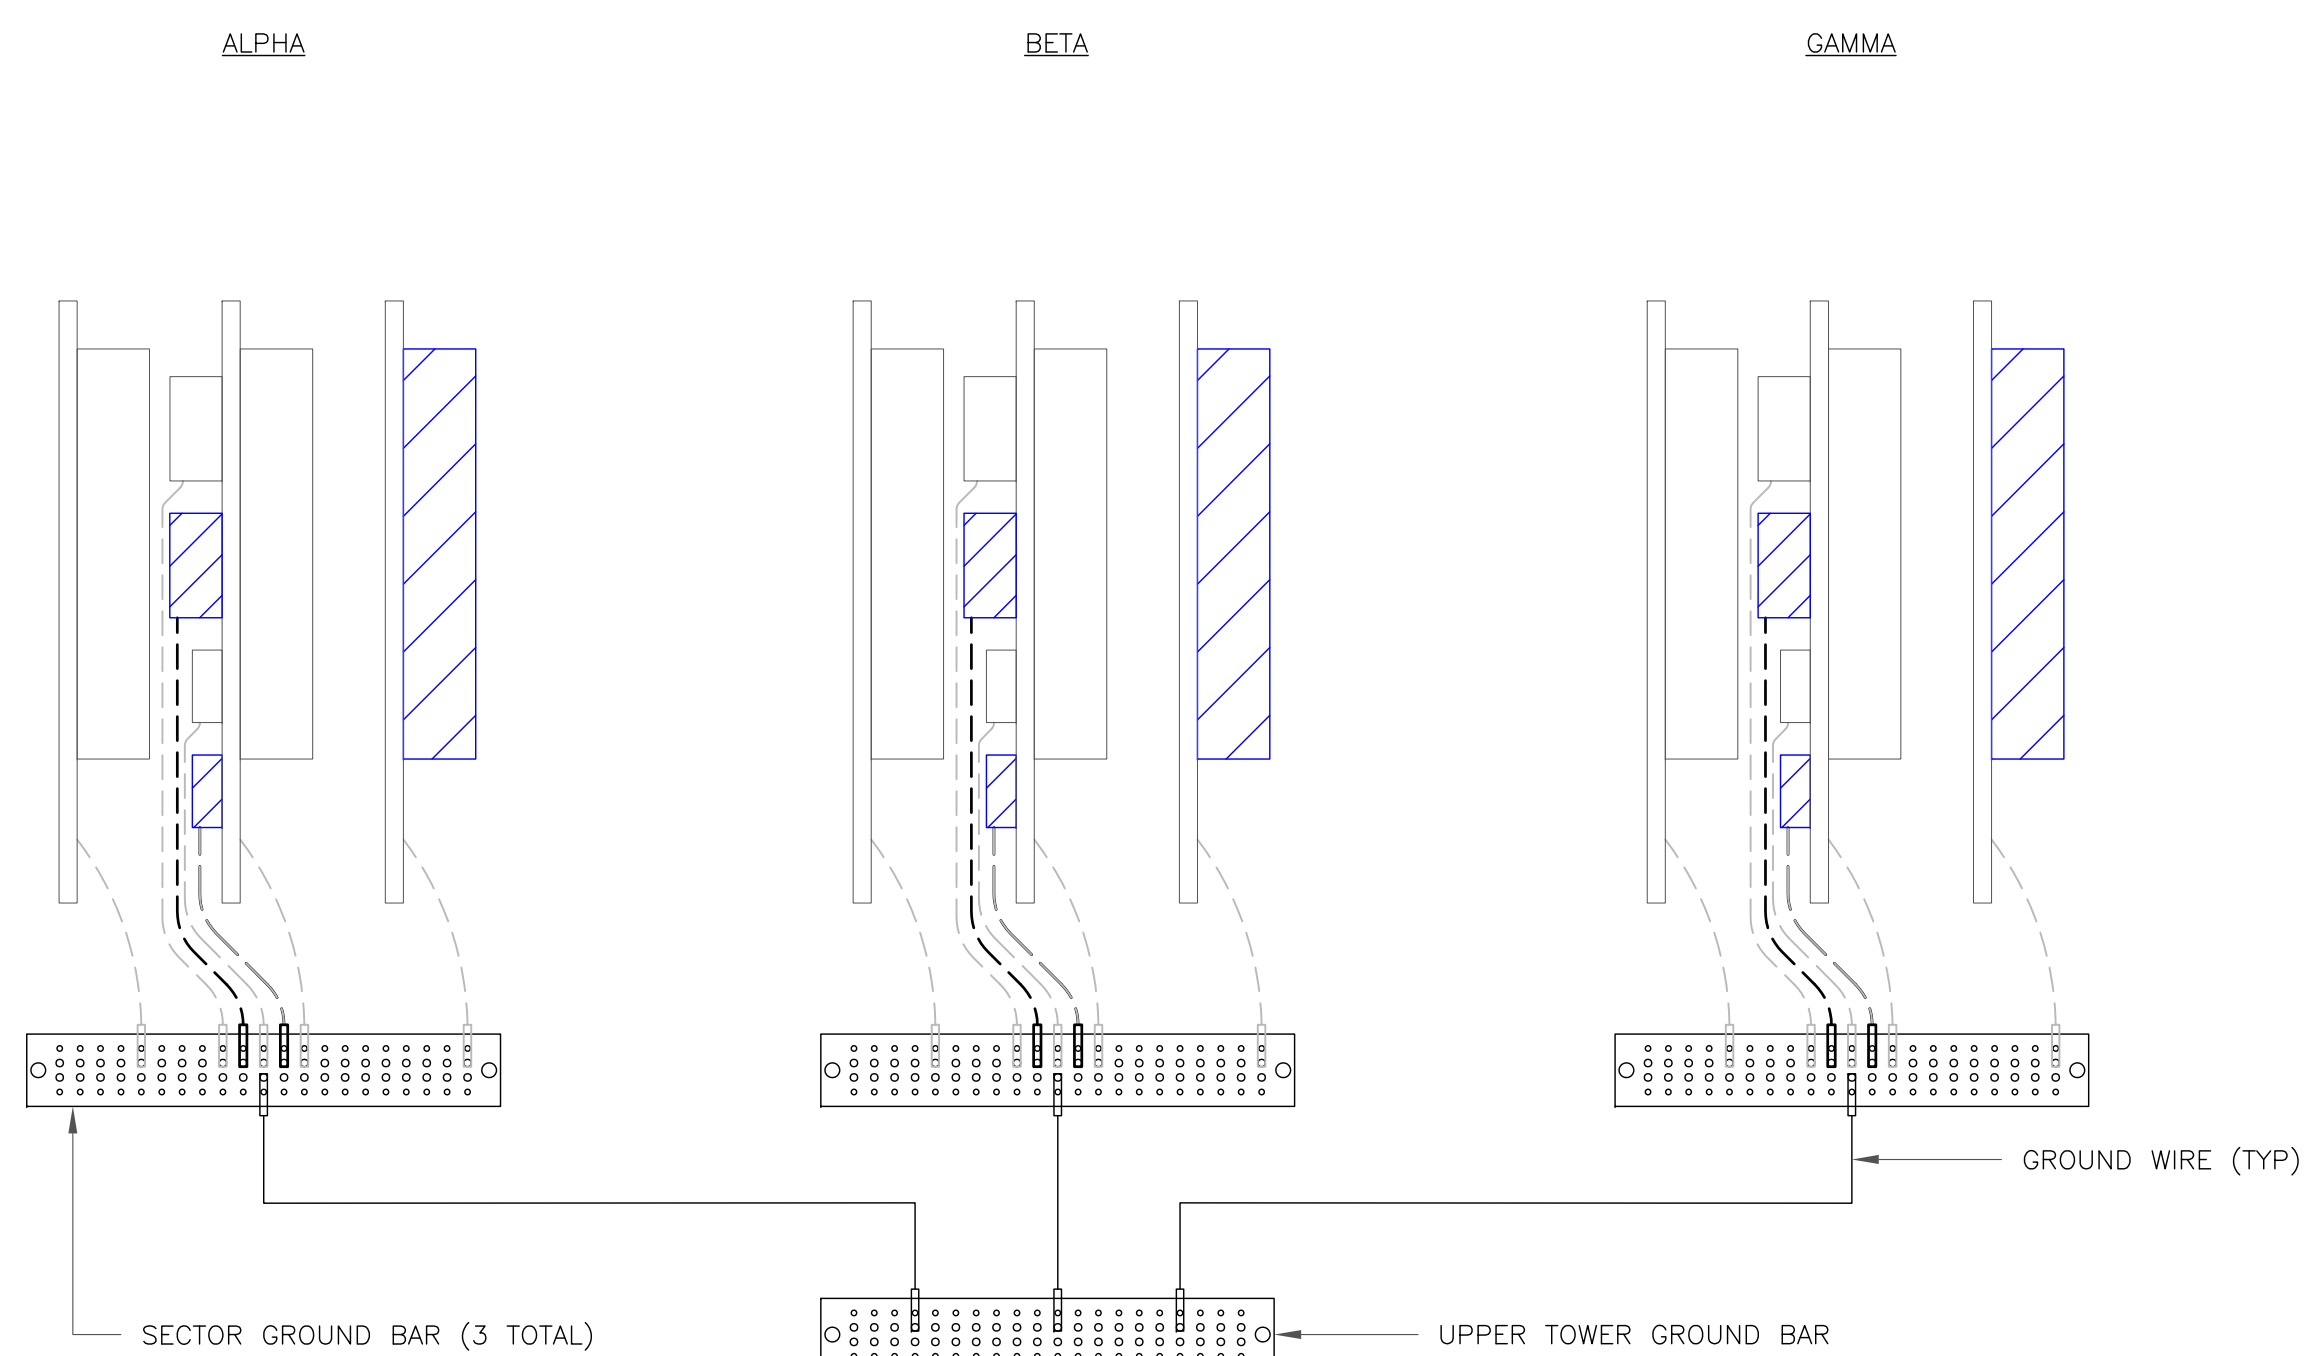

NOTE:  
ALL NEW GROUNDS TO BE #6 STRANDED  
COPPER WITH GREEN INSULATION UNLESS  
NOTED OTHERWISE.

1 ANTENNA GROUNDING DIAGRAM  
SCALE: NOT TO SCALE




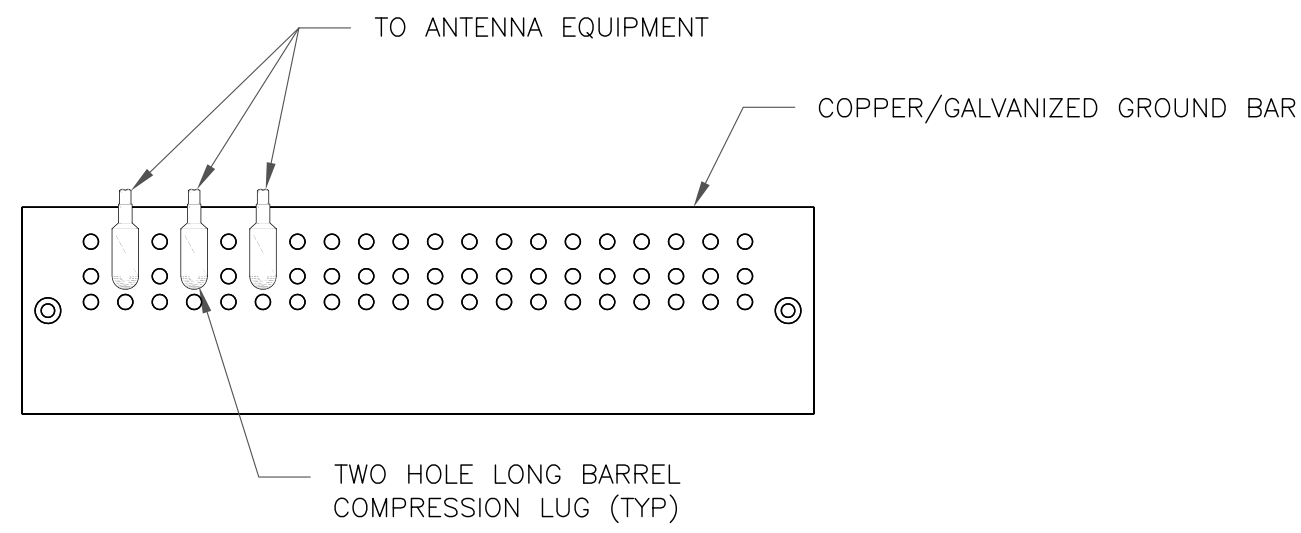

NOTES:

1. DOUBLING UP "OR STACKING" OF CONNECTIONS IS NOT PERMITTED.
2. EXTERIOR ANTIOXIDANT JOINT COMPOUND TO BE USED ON ALL EXTERIOR CONNECTIONS.
3. GROUND BAR SHALL NOT BE ISOLATED FROM TOWER. MOUNT DIRECTLY TO ANTENNA MOUNT STEEL.


1 ANTENNA SECTOR GROUND BAR DETAIL  
SCALE: NOT TO SCALE

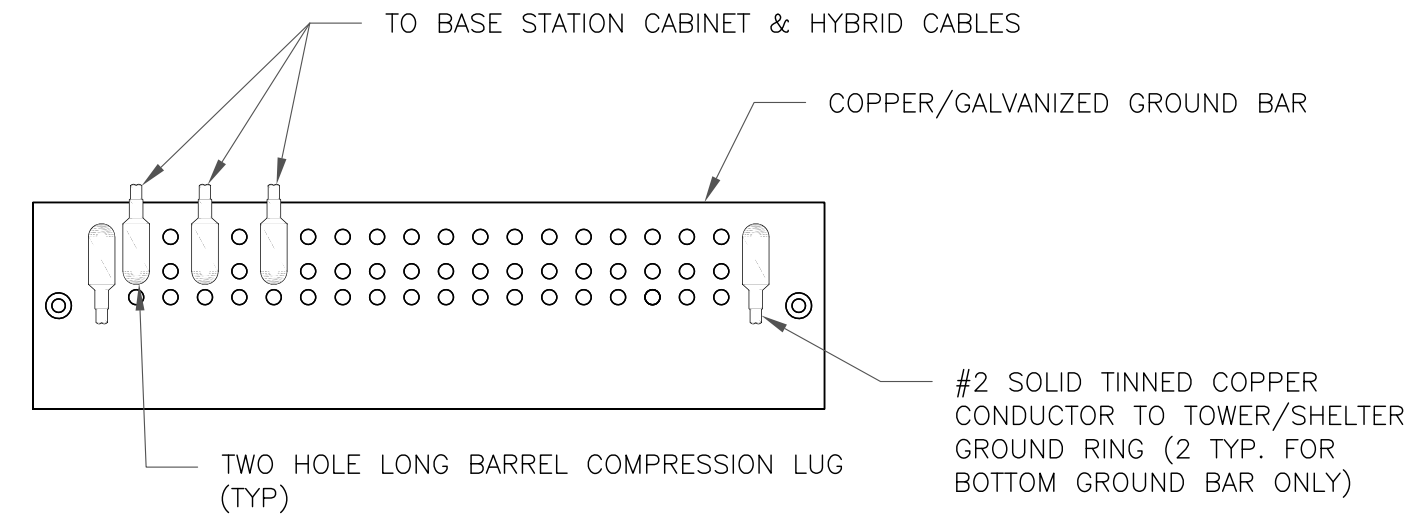

NOTES:

1. EXTERIOR ANTIOXIDANT JOINT COMPOUND TO BE USED ON ALL EXTERIOR CONNECTIONS.
2. GROUND BAR SHALL NOT BE ISOLATED FROM TOWER. MOUNT DIRECTLY TO TOWER STEEL (TOWER ONLY).
3. GROUND BAR SHALL BE ISOLATED FROM BUILDING OR SHELTER.




2 TOWER/SHELTER GROUND BAR DETAIL  
SCALE: NOT TO SCALE

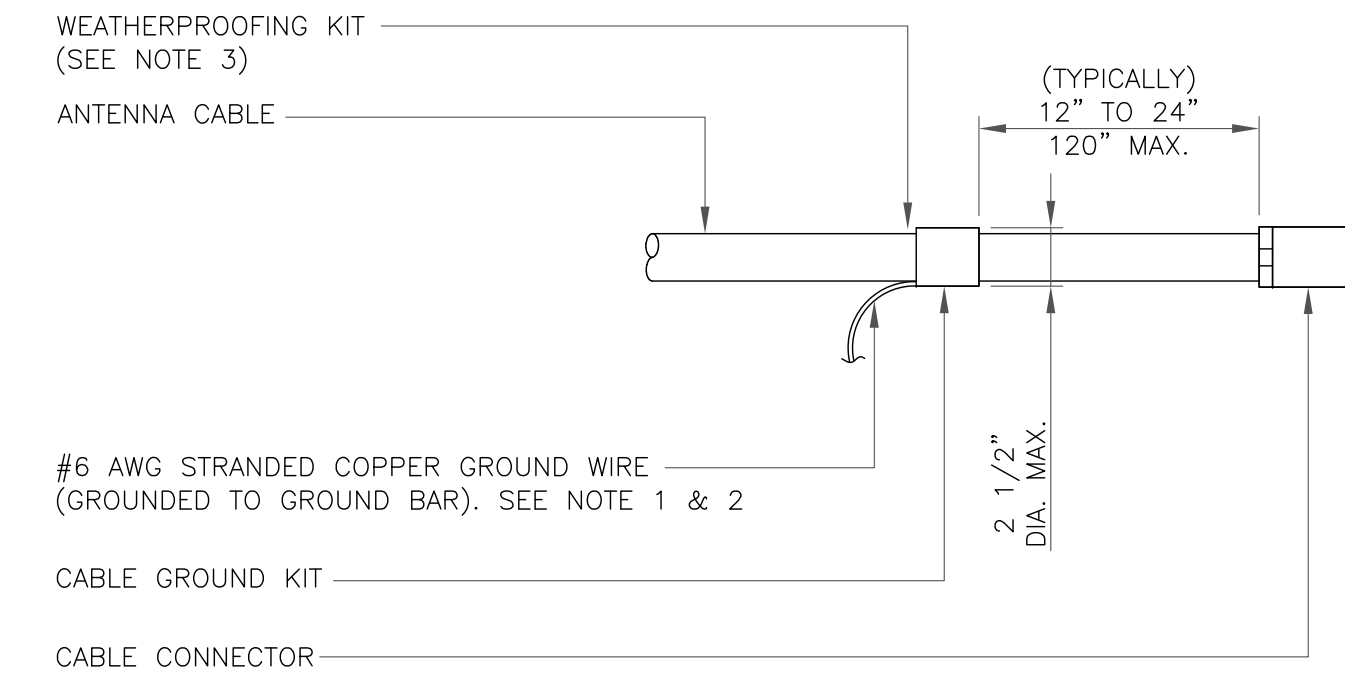

NOTES:

1. DO NOT INSTALL CABLE GROUND KIT AT A BEND AND ALWAYS DIRECT GROUND WIRE DOWN TO GROUND BAR.
2. GROUNDING KIT SHALL BE TYPE AND PART NUMBER AS SUPPLIED OR RECOMMENDED BY CABLE MANUFACTURER.
3. WEATHER PROOFING SHALL BE TWO-PART TAPE KIT, COLD SHRINK SHALL NOT BE USED.

3 CABLE GROUND KIT CONNECTION  
SCALE: NOT TO SCALE

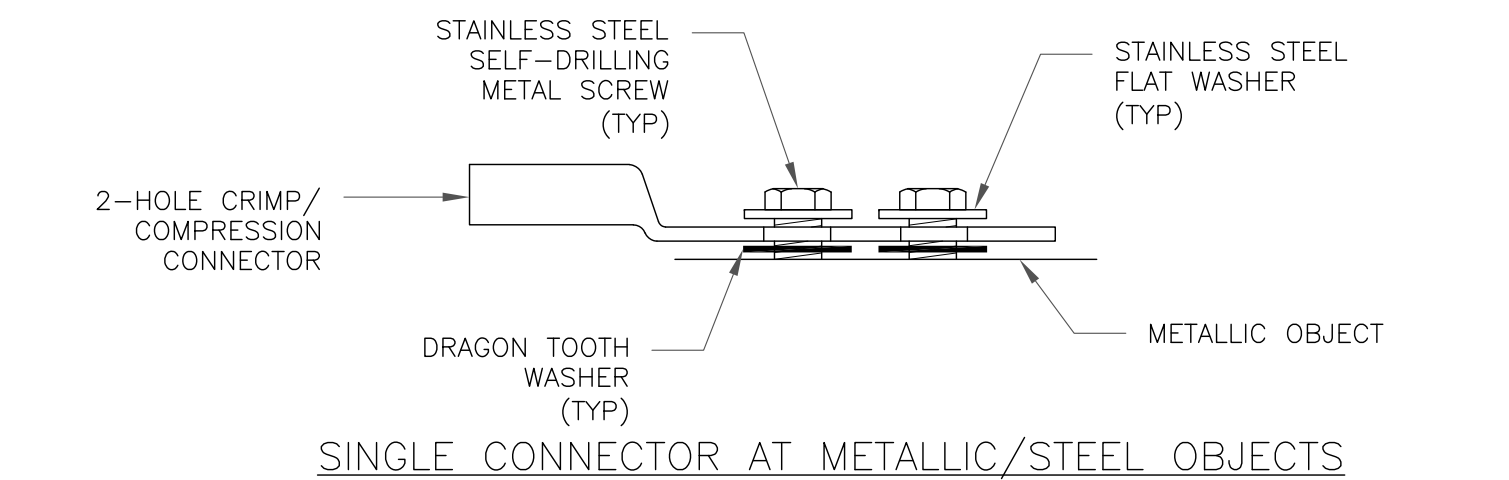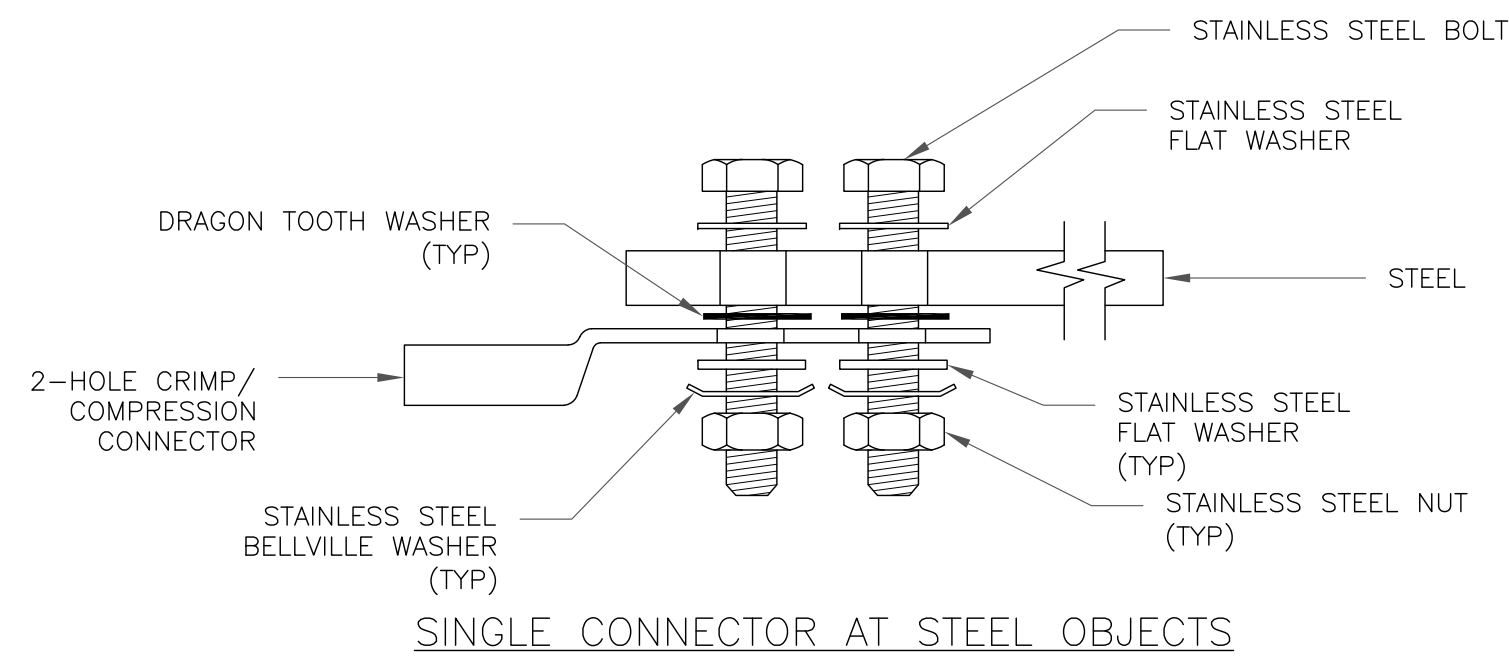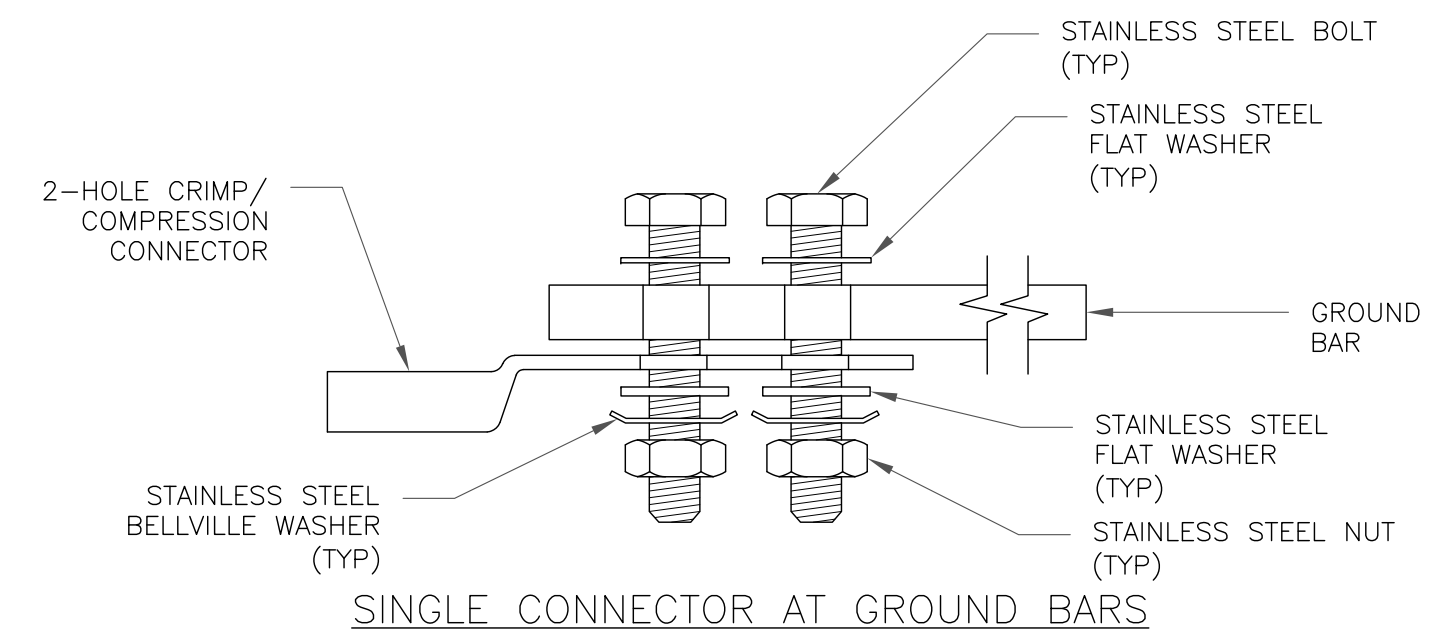

4 HARDWARE DETAIL FOR EXTERIOR CONNECTIONS  
SCALE: NOT TO SCALE

5 NOT USED  
SCALE: NOT TO SCALE

6 NOT USED  
SCALE: NOT TO SCALE

**T-Mobile**  
35 GRIFFIN ROAD  
BLOOMFIELD, CT 06002

**CROWN CASTLE**  
3 CORPORATE PARK DRIVE, SUITE 101  
CLIFTON PARK, NY 12065

**INFINIGY**  
FROM ZERO TO INFINIGY  
the solutions are endless  
1033 Watervliet Shaker Rd | Albany, NY 12205  
Phone: 518-690-0790 | Fax: 518-690-0793  
www.infinigy.com

T-MOBILE SITE NUMBER:  
**CT11279D**


BU #: 828054  
**SOUTH WINDOR/RT 5**

300 GOVERNORS HIGHWAY  
SOUTH WINDSOR, CT 06074

EXISTING 165' MONOPOLE

ISSUED FOR:

REV	DATE	DRWN	DESCRIPTION	DES./QA
0	12/03/20	BMM	FINAL	SS
1	01/20/21	BMM	GROUND AREA ADD	SS
2	01/26/21	SS	GROUND AREA REV	SS

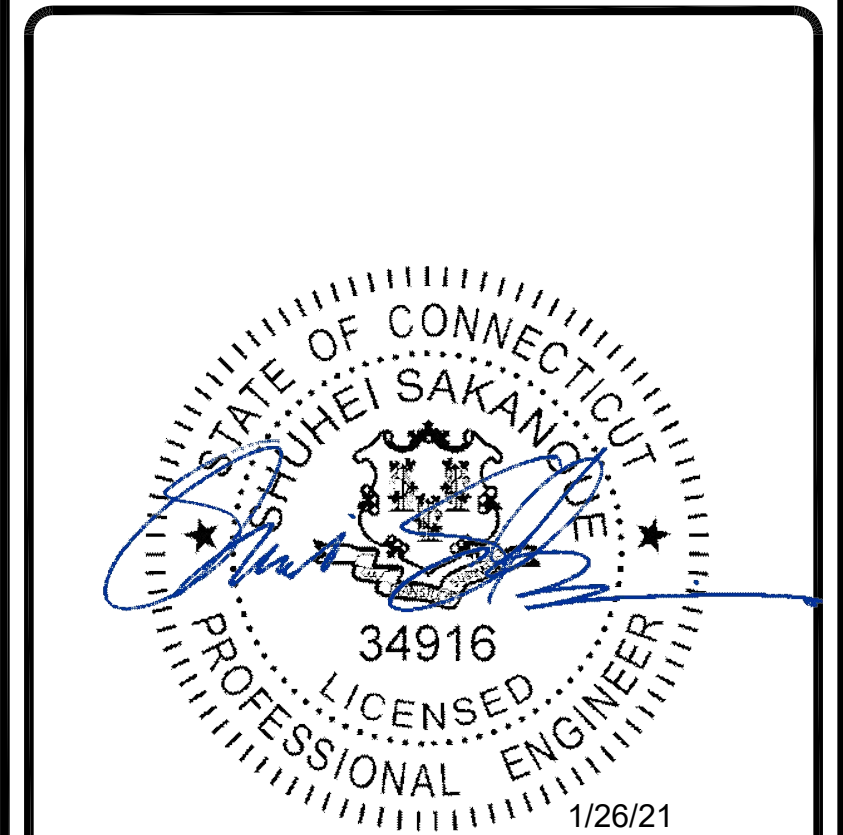

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

SHEET NUMBER: **G-2** REVISION: **1**

# Exhibit D

## **Structural Analysis Report**

Date: **October 26, 2020**

Stephanie Lipscomb  
Crown Castle  
370 Mallory Station Road Suite 505  
Franklin, TN 37067

Paul J. Ford and Company  
250 E. Broad St., Ste 600  
Columbus, OH 43215  
614-221-6679

**Subject:** **Structural Analysis Report**

**Carrier Designation:** **T-Mobile Co-Locate**  
**Carrier Site Number:** CT11279D  
**Carrier Site Name:** South Windsor/Rt 5

**Crown Castle Designation:** **Crown Castle BU Number:** 828054  
**Crown Castle Site Name:** South Windsor/Rt 5  
**Crown Castle JDE Job Number:** 620142  
**Crown Castle Work Order Number:** 1890923  
**Crown Castle Order Number:** 529720 Rev. 0

**Engineering Firm Designation:** **Paul J. Ford and Company Project Number:** 37520-2262.001.7805

**Site Data:** **300 Governors Highway, South Windsor, Hartford County, CT**  
**Latitude 41° 50' 0.4", Longitude -72° 36' 11"**  
**169 Foot - Monopole Tower**

Dear Stephanie Lipscomb,

Paul J. Ford and Company is pleased to submit this “**Structural Analysis Report**” to determine the structural integrity of the above-mentioned tower.

The purpose of the analysis is to determine acceptability of the tower stress level. Based on our analysis we have determined the tower stress level for the structure and foundation, under the following load case, to be:

LC7: Proposed Equipment Configuration


**Sufficient Capacity (90.4%)**

This analysis utilizes an ultimate 3-second gust wind speed of 125 mph as required by the 2018 Connecticut State Building Code and Appendix N. Applicable Standard references and design criteria are listed in Section 2 - Analysis Criteria.

*Nathan C. Miller*

Nathan C. Miller, E.I.  
Structural Designer  
nmiller@pauljford.com

*resp*

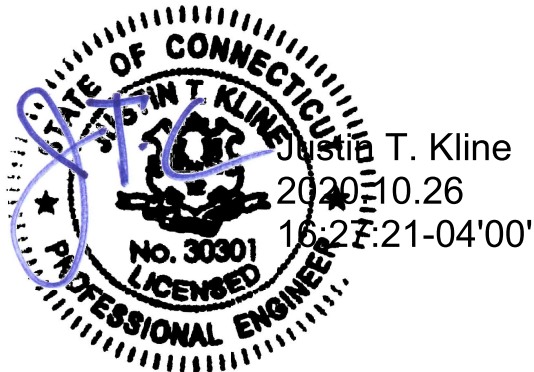

## TABLE OF CONTENTS

### 1) INTRODUCTION

### 2) ANALYSIS CRITERIA

Table 1 - Proposed Equipment Configuration

Table 2 - Other Considered Equipment

### 3) ANALYSIS PROCEDURE

Table 3 - Documents Provided

3.1) Analysis Method

3.2) Assumptions

### 4) ANALYSIS RESULTS

Table 4 - Section Capacity (Summary)

Table 5 – Tower Component Stresses vs. Capacity – LC7

4.1) Recommendations

### 5) APPENDIX A

tnxTower Output

### 6) APPENDIX B

Base Level Drawing

### 7) APPENDIX C

Additional Calculations

## 1) INTRODUCTION

This tower is a 169 ft Monopole tower designed by ENGINEERED ENDEAVORS, INC. in January of 2000.

The tower has been modified multiple times to accommodate additional loading.

## 2) ANALYSIS CRITERIA

<b>TIA-222 Revision:</b>	TIA-222-H
<b>Risk Category:</b>	II
<b>Wind Speed:</b>	125 mph
<b>Exposure Category:</b>	C
<b>Topographic Factor:</b>	1
<b>Ice Thickness:</b>	2 in
<b>Wind Speed with Ice:</b>	50 mph
<b>Service Wind Speed:</b>	60 mph

**Table 1 - Proposed Equipment Configuration**

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
165.0	166.0	3	commscope	SDX1926Q-43	7 2	1-5/8 1-3/8
		3	ericsson	AIR 32 B2A/B66AA w/ Mount Pipe		
		3	ericsson	AIR6449 B41_T-MOBILE w/ Mount Pipe		
		3	ericsson	RADIO 4449 B12/B71		
		3	ericsson	RRUS 4415 B25_CCIV2		
	165.0	1	site pro 1	HRK12 Handrail Kit		
		3	ericsson	KRY 112 144/1		
		1	tower mounts	Platform Mount [LP 601-1]		

**Table 2 - Other Considered Equipment**

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
156.0	162.0	3	cci antennas	DMP65R-BU8D w/ Mount Pipe	2 4 12	17/64 7/8 1-5/8
		3	cci antennas	OPA65R-BU8D w/ Mount Pipe		
		3	ericsson	RADIO 4415 B30		
		3	ericsson	RADIO 4449 B5/B12		
		3	ericsson	RRUS 8843 B2/B66A		
	1	raycap	DC6-48-60-18-8F			
156.0	1	tower mounts	Platform Mount [LP 601-1]			

**Table 2 - Other Considered Equipment**

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
148.0	148.0	3	alcatel lucent	800MHZ RRH	3	1-1/4
		3	alcatel lucent	PCS 1900MHZ 4X45W-65MHZ		
		3	alcatel lucent	RRH2X50-800		
		3	commscope	NNVV-65B-R4 w/ Mount Pipe		
		1	tower mounts	T-Arm Mount [TA 702-3]		
138.0	138.0	3	rfs celwave	APXV18-206517-A w/ Mount Pipe	6	1-5/8
		1	tower mounts	Side Arm Mount [SO 102-3]		
124.0	128.0	2	andrew	VHLP800-11	3 1 6 2	1/4 5/16 1/2 2" Conduit
		3	argus technologies	LLPX310R w/ Mount Pipe		
		2	dragonwave	HORIZON DUO		
		3	samsung telecommunications	WIMAX DAP HEAD		
	124.0	1	tower mounts	Side Arm Mount [SO 701-3]		
118.0	119.0	1	sigfox	CAVITY FILTER	1	1/2
		1	sigfox	CXL 900-3LW		
		1	sigfox	LNA		
	118.0	1	tower mounts	Side Arm Mount [SO 304-1]		
111.0	111.0	3	alcatel lucent	B4 RRH2X60-4R	2 18	1-1/4 1-5/8
		6	andrew	HBXX-6517DS-A2M w/ Mount Pipe		
		6	andrew	LNX-6514DS-A1M w/ Mount Pipe		
		2	raycap	RRFDC-3315-PF-48		
		1	tower mounts	Platform Mount [LP 303-1]		

### 3) ANALYSIS PROCEDURE

**Table 3 - Documents Provided**

Document	Remarks	Reference	Source
4-GEOTECHNICAL REPORTS	FPA, 99A076AR1, 01/11/2000	3436696	CCISITES
4-TOWER FOUNDATION DRAWINGS/DESIGN/SPECS	EEL, 6255 REV 1, 03/10/2000	3436661	CCISITES
4-TOWER MANUFACTURER DRAWINGS	EEL, 99-1371 REV 1, 01/31/2000	3436681	CCISITES
4-TOWER STRUCTURAL ANALYSIS REPORTS	Centek Engineering, 10003.CO4, 06/11/2010	3487016	CCISITES
4-POST-MODIFICATION INSPECTION	TEP, 103179, 12/03/2010	3773025	CCISITES
4-TOWER REINFORCEMENT DESIGN/DRAWINGS/DATA	GPD, 2012712.97, 06/29/2012	3793344	CCISITES
4-POST-MODIFICATION INSPECTION	ETS, 03/13/2013	3773024	CCISITES
4-TOWER REINFORCEMENT DESIGN/DRAWINGS/DATA	PJF, 37513-1535.003.7700 R1, 12/03/2015	5431037	CCISITES
4-POST-MODIFICATION INSPECTION	FDH Velocitel, 15BZLZ1500, 12/03/2015	6000997	CCISITES
4-TOWER REINFORCEMENT DESIGN/DRAWINGS/DATA	PJF, 37516-2594.003.7700, 11/17/2016	6563357	CCISITES
4-POST-MODIFICATION INSPECTION	CCI, 1352522, 05/16/2017	6861018	CCISITES

#### 3.1) Analysis Method

tnxTower (version 8.0.7.5), a commercially available analysis software package, was used to create a three-dimensional model of the tower and calculate member stresses for various loading cases. Selected output from the analysis is included in Appendix A. When applicable, Crown Castle has calculated and provided the effective area for panel antennas using approved methods following the intent of the TIA-222 Standard.

#### 3.2) Assumptions

- 1) Tower and structures were maintained in accordance with the TIA-222 Standard.
- 2) The configuration of antennas, transmission cables, mounts and other appurtenances are as specified in Tables 1 and 2 and the referenced drawings.
- 3) The structure was modified in conformance with the referenced modification drawings as shown in the referenced post modification inspection.
- 4) It is assumed that all base pole reactions are taken by the micropiles.

This analysis may be affected if any assumptions are not valid or have been made in error. Paul J. Ford and Company should be notified to determine the effect on the structural integrity of the tower.

#### 4) ANALYSIS RESULTS

**Table 4 - Section Capacity (Summary)**

Elevation (ft)	Component Type	Size	Critical Element	% Capacity	Pass / Fail
169 - 164	Pole	TP16.455x15.5x0.25	Pole	3.6%	Pass
164 - 159	Pole	TP17.409x16.455x0.25	Pole	12.4%	Pass
159 - 154	Pole	TP18.364x17.409x0.25	Pole	28.7%	Pass
154 - 149	Pole	TP19.318x18.364x0.25	Pole	40.5%	Pass
149 - 144	Pole	TP20.273x19.318x0.25	Pole	52.0%	Pass
144 - 139	Pole	TP21.228x20.273x0.25	Pole	61.9%	Pass
139 - 136.66	Pole	TP22.31x21.228x0.25	Pole	66.1%	Pass
136.66 - 131.66	Pole	TP22.115x21.174x0.3125	Pole	62.8%	Pass
131.66 - 126.66	Pole	TP23.055x22.115x0.3125	Pole	68.7%	Pass
126.66 - 121.66	Pole	TP23.996x23.055x0.3125	Pole	74.5%	Pass
121.66 - 116.66	Pole	TP24.937x23.996x0.3125	Pole	79.5%	Pass
116.66 - 111.66	Pole	TP25.877x24.937x0.3125	Pole	84.0%	Pass
111.66 - 111	Pole	TP26.001x25.877x0.3125	Pole	84.6%	Pass
111 - 110.75	Pole + Reinf.	TP26.048x26.001x0.575	Reinf. 6 Tension Rupture	76.1%	Pass
110.75 - 105.75	Pole + Reinf.	TP26.989x26.048x0.5625	Reinf. 6 Tension Rupture	82.6%	Pass
105.75 - 101.5	Pole + Reinf.	TP27.788x26.989x0.55	Reinf. 6 Tension Rupture	87.9%	Pass
101.5 - 101.25	Pole + Reinf.	TP27.835x27.788x0.9875	Reinf. 12 Tension Rupture	59.9%	Pass
101.25 - 101	Pole + Reinf.	TP27.882x27.835x0.9875	Reinf. 12 Tension Rupture	60.2%	Pass
101 - 100.75	Pole + Reinf.	TP27.93x27.882x0.725	Reinf. 12 Tension Rupture	80.1%	Pass
100.75 - 95.75	Pole + Reinf.	TP28.87x27.93x0.7125	Reinf. 12 Tension Rupture	85.7%	Pass
95.75 - 92.16	Pole + Reinf.	TP30.36x28.87x0.7	Reinf. 12 Tension Rupture	89.6%	Pass
92.16 - 86.83	Pole + Reinf.	TP29.924x28.92x0.9375	Reinf. 12 Tension Rupture	74.1%	Pass
86.83 - 81.83	Pole + Reinf.	TP30.865x29.924x0.925	Reinf. 12 Tension Rupture	78.2%	Pass
81.83 - 81.5	Pole + Reinf.	TP30.927x30.865x0.925	Reinf. 12 Tension Rupture	78.4%	Pass
81.5 - 81.25	Pole + Reinf.	TP30.974x30.927x0.95	Reinf. 11 Tension Rupture	66.6%	Pass
81.25 - 76.25	Pole + Reinf.	TP31.915x30.974x0.925	Reinf. 11 Tension Rupture	69.9%	Pass
76.25 - 71.25	Pole + Reinf.	TP32.856x31.915x0.9	Reinf. 11 Tension Rupture	73.1%	Pass
71.25 - 66.25	Pole + Reinf.	TP33.797x32.856x0.875	Reinf. 11 Tension Rupture	76.2%	Pass
66.25 - 61.25	Pole + Reinf.	TP34.738x33.797x0.8625	Reinf. 11 Tension Rupture	79.1%	Pass
61.25 - 56.25	Pole + Reinf.	TP35.679x34.738x0.85	Reinf. 11 Tension Rupture	82.0%	Pass
56.25 - 51.25	Pole + Reinf.	TP36.619x35.679x0.825	Reinf. 11 Tension Rupture	84.8%	Pass
51.25 - 48.66	Pole + Reinf.	TP38.11x36.619x0.825	Reinf. 11 Tension Rupture	86.2%	Pass
48.66 - 42.33	Pole + Reinf.	TP37.546x36.357x1.0375	Reinf. 11 Tension Rupture	73.7%	Pass
42.33 - 37.4	Pole + Reinf.	TP38.473x37.546x1.025	Reinf. 11 Tension Rupture	75.9%	Pass
37.4 - 37.15	Pole + Reinf.	TP38.52x38.473x1.025	Reinf. 7 Tension Rupture	76.0%	Pass
37.15 - 32.15	Pole + Reinf.	TP39.459x38.52x1	Reinf. 7 Tension Rupture	78.2%	Pass
32.15 - 27.15	Pole + Reinf.	TP40.399x39.459x0.975	Reinf. 7 Tension Rupture	80.3%	Pass
27.15 - 22.15	Pole + Reinf.	TP41.338x40.399x0.9625	Reinf. 7 Tension Rupture	82.3%	Pass
22.15 - 19.5	Pole + Reinf.	TP41.836x41.338x0.95	Reinf. 7 Tension Rupture	83.4%	Pass
19.5 - 19.25	Pole + Reinf.	TP41.883x41.836x1.025	Reinf. 7 Tension Rupture	78.0%	Pass
19.25 - 14.25	Pole + Reinf.	TP42.822x41.883x1	Reinf. 7 Tension Rupture	79.8%	Pass



Elevation (ft)	Component Type	Size	Critical Element	% Capacity	Pass / Fail
14.25 - 9.25	Pole + Reinf.	TP43.762x42.822x1	Reinf. 7 Tension Rupture	81.6%	Pass
9.25 - 9	Pole + Reinf.	TP43.809x43.762x1	Reinf. 7 Tension Rupture	81.7%	Pass
9 - 8.75	Pole + Reinf.	TP43.856x43.809x1.025	Reinf. 7 Tension Rupture	78.8%	Pass
8.75 - 7	Pole + Reinf.	TP44.185x43.856x1.025	Reinf. 7 Tension Rupture	79.3%	Pass
7 - 6.75	Pole + Reinf.	TP44.232x44.185x0.975	Reinf. 7 Tension Rupture	82.5%	Pass
6.75 - 5	Pole + Reinf.	TP44.561x44.232x0.975	Reinf. 7 Tension Rupture	83.1%	Pass
5 - 4.75	Pole + Reinf.	TP44.607x44.561x1.45	Reinf. 3 Connection	65.6%	Pass
4.75 - 3	Pole + Reinf.	TP44.936x44.607x1.425	Reinf. 3 Connection	66.1%	Pass
3 - 2.75	Pole + Reinf.	TP44.983x44.936x1.45	Reinf. 7 Tension Rupture	58.4%	Pass
2.75 - 2.25	Pole + Reinf.	TP45.077x44.983x1.45	Reinf. 7 Tension Rupture	58.5%	Pass
2.25 - 2	Pole + Reinf.	TP45.124x45.077x1.2	Reinf. 8 Tension Rupture	70.3%	Pass
2 - 0	Pole + Reinf.	TP45.5x45.124x1.175	Reinf. 8 Tension Rupture	70.9%	Pass
				Summary	
			Pole	84.6%	Pass
			Reinforcement	89.6%	Pass
			Overall	89.6%	Pass

**Table 5 - Tower Component Stresses vs. Capacity – LC7**

Notes	Component	Elevation (ft)	% Capacity	Pass / Fail
1	Anchor Rods	0	63.1	Pass
1	Base Plate	0	63.9	Pass
1	Base Foundation	0	90.4	Pass

<b>Structure Rating (max from all components) =</b>	<b>90.4%</b>
---	--------------

Notes:


- All structural ratings are per TIA-222-H Section 15.5
- 1) See additional documentation in "Appendix C – Additional Calculations" for calculations supporting the % capacity consumed.

**4.1) Recommendations**



The tower and its foundation have sufficient capacity to carry the proposed load configuration. No modifications are required at this time.

**APPENDIX A**  
**TNXTOWER OUTPUT**

Section	Length (ft)	Number of Sides	Thickness (in)	Socket Length (ft)	Top Dia (in)	Bot Dia (in)	Grade	Weight (K)
1	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
2	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
3	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
4	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
5	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
6	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
7	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
8	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
9	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
10	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
11	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
12	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
13	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
14	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
15	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
16	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
17	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
18	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
19	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
20	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
21	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
22	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
23	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
24	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
25	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
26	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
27	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
28	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
29	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
30	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
31	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
32	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
33	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
34	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
35	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
36	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
37	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
38	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
39	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
40	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
41	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500
42	5.00	18	0.3125	3.33	42.31	42.31	A572-65	0.2500

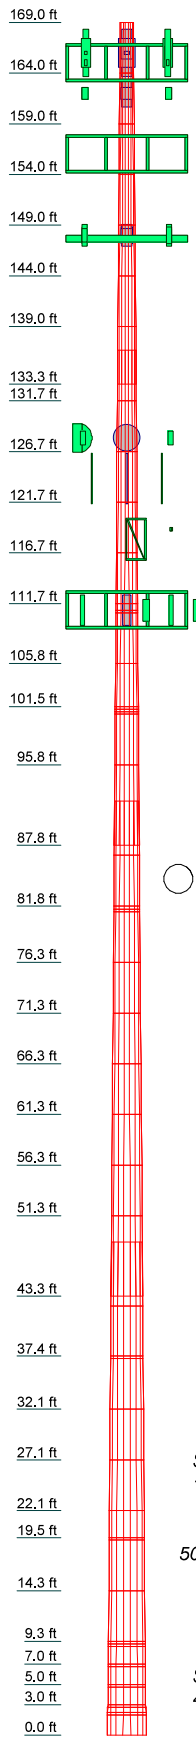

ALL REACTIONS ARE FACTORED




**MATERIAL STRENGTH**

GRADE	Fy	Fu	GRADE	Fy	Fu
A572-65	65 ksi	80 ksi			

**TOWER DESIGN NOTES**

1. Tower designed for Exposure C to the TIA-222-H Standard.
2. Tower designed for a 125 mph basic wind in accordance with the TIA-222-H Standard.
3. Tower is also designed for a 50 mph basic wind with 2.00 in ice. Ice is considered to increase in thickness with height.
4. Deflections are based upon a 60 mph wind.
5. Tower Risk Category II.
6. Topographic Category 1 with Crest Height of 0.00 ft
7. TIA-222-H Annex S

 <p><b>Paul J. Ford and Company</b> 250 E. Broad St., Ste 600 Columbus, OH 43215 Phone: 614-221-6679 FAX:</p>	<b>Job: 165-Ft Monopole   South Windsor/Rt 5</b>		
	<b>Project: PJF 37520-2262   BU 828054</b>		
	<b>Client: Crown Castle</b>	<b>Drawn by: Nathan Miller</b>	<b>App'd:</b>
	<b>Code: TIA-222-H</b>	<b>Date: 10/22/20</b>	<b>Scale: NTS</b>
		<b>Path:</b>	
		<b>Dwg No. E-1</b>	

## Tower Input Data

This tower is designed using the TIA-222-H standard.

The following design criteria apply:

1. Tower base elevation above sea level: 70.11 ft.
2. Basic wind speed of 125 mph.
3. Risk Category II.
4. Exposure Category C.
5. Simplified Topographic Factor Procedure for wind speed-up calculations is used.
6. Topographic Category: 1.
7. Crest Height: 0.00 ft.
8. Nominal ice thickness of 2.0000 in.
9. Ice thickness is considered to increase with height.
10. Ice density of 56 pcf.
11. A wind speed of 50 mph is used in combination with ice.
12. Temperature drop of 50 °F.
13. Deflections calculated using a wind speed of 60 mph.
14. TIA-222-H Annex S.
15. A non-linear (P-delta) analysis was used.
16. Pressures are calculated at each section.
17. Stress ratio used in pole design is 1.05.
18. Tower analysis based on target reliabilities in accordance with Annex S.
19. Load Modification Factors used:  $K_{es}(F_w) = 0.95$ ,  $K_{es}(t_i) = 0.85$ .
20. Local bending stresses due to climbing loads, feed line supports, and appurtenance mounts are not considered.

## Options

Consider Moments - Legs Consider Moments - Horizontals Consider Moments - Diagonals Use Moment Magnification Use Code Stress Ratios ✓ Use Code Safety Factors - Guys Escalate Ice Always Use Max Kz Use Special Wind Profile  Include Bolts In Member Capacity  Leg Bolts Are At Top Of Section Secondary Horizontal Braces Leg Use Diamond Inner Bracing (4 Sided) SR Members Have Cut Ends SR Members Are Concentric	Distribute Leg Loads As Uniform Assume Legs Pinned ✓ Assume Rigid Index Plate ✓ Use Clear Spans For Wind Area Use Clear Spans For KL/r Retension Guys To Initial Tension ✓ Bypass Mast Stability Checks ✓ Use Azimuth Dish Coefficients ✓ Project Wind Area of Appurt.  Autocalc Torque Arm Areas  Add IBC .6D+W Combination Sort Capacity Reports By Component Triangulate Diamond Inner Bracing Treat Feed Line Bundles As Cylinder Ignore KL/ry For 60 Deg. Angle Legs	Use ASCE 10 X-Brace Ly Rules Calculate Redundant Bracing Forces Ignore Redundant Members in FEA SR Leg Bolts Resist Compression All Leg Panels Have Same Allowable Offset Girt At Foundation ✓ Consider Feed Line Torque Include Angle Block Shear Check Use TIA-222-H Bracing Resist. Exemption Use TIA-222-H Tension Splice Exemption  <div style="text-align: center; background-color: #e0e0e0; padding: 2px;"><b>Poles</b></div> ✓ Include Shear-Torsion Interaction Always Use Sub-Critical Flow Use Top Mounted Sockets Pole Without Linear Attachments Pole With Shroud Or No Appurtenances Outside and Inside Corner Radii Are Known
--	---	---

## Tapered Pole Section Geometry

Section	Elevation ft	Section Length ft	Splice Length ft	Number of Sides	Top Diameter in	Bottom Diameter in	Wall Thickness in	Bend Radius in	Pole Grade
L1	169.00-164.00	5.00	0.00	18	15.5000	16.4546	0.2500	1.0000	A572-65 (65 ksi)
L2	164.00-159.00	5.00	0.00	18	16.4546	17.4092	0.2500	1.0000	A572-65 (65 ksi)
L3	159.00-154.00	5.00	0.00	18	17.4092	18.3638	0.2500	1.0000	A572-65 (65 ksi)
L4	154.00-149.00	5.00	0.00	18	18.3638	19.3183	0.2500	1.0000	A572-65

Section	Elevation ft	Section Length ft	Splice Length ft	Number of Sides	Top Diameter in	Bottom Diameter in	Wall Thickness in	Bend Radius in	Pole Grade
L5	149.00-144.00	5.00	0.00	18	19.3183	20.2729	0.2500	1.0000	(65 ksi) A572-65
L6	144.00-139.00	5.00	0.00	18	20.2729	21.2275	0.2500	1.0000	(65 ksi) A572-65
L7	139.00-133.33	5.67	3.33	18	21.2275	22.3100	0.2500	1.0000	(65 ksi) A572-65
L8	133.33-131.66	5.00	0.00	18	21.1742	22.1148	0.3125	1.2500	(65 ksi) A572-65
L9	131.66-126.66	5.00	0.00	18	22.1148	23.0554	0.3125	1.2500	(65 ksi) A572-65
L10	126.66-121.66	5.00	0.00	18	23.0554	23.9960	0.3125	1.2500	(65 ksi) A572-65
L11	121.66-116.66	5.00	0.00	18	23.9960	24.9366	0.3125	1.2500	(65 ksi) A572-65
L12	116.66-111.66	5.00	0.00	18	24.9366	25.8772	0.3125	1.2500	(65 ksi) A572-65
L13	111.66-111.00	0.66	0.00	18	25.8772	26.0013	0.3125	1.2500	(65 ksi) A572-65
L14	111.00-110.75	0.25	0.00	18	26.0013	26.0484	0.5750	2.3000	(65 ksi) A572-65
L15	110.75-105.75	5.00	0.00	18	26.0484	26.9889	0.5625	2.2500	(65 ksi) A572-65
L16	105.75-101.50	4.25	0.00	18	26.9889	27.7884	0.5500	2.2000	(65 ksi) A572-65
L17	101.50-101.25	0.25	0.00	18	27.7884	27.8355	0.9875	3.9500	(65 ksi) A572-65
L18	101.25-101.00	0.25	0.00	18	27.8355	27.8825	0.9875	3.9500	(65 ksi) A572-65
L19	101.00-100.75	0.25	0.00	18	27.8825	27.9295	0.7250	2.9000	(65 ksi) A572-65
L20	100.75-95.75	5.00	0.00	18	27.9295	28.8701	0.7125	2.8500	(65 ksi) A572-65
L21	95.75-87.83	7.92	4.33	18	28.8701	30.3600	0.7000	2.8000	(65 ksi) A572-65
L22	87.83-86.83	5.33	0.00	18	28.9205	29.9235	0.9375	3.7500	(65 ksi) A572-65
L23	86.83-81.83	5.00	0.00	18	29.9235	30.8645	0.9250	3.7000	(65 ksi) A572-65
L24	81.83-81.50	0.33	0.00	18	30.8645	30.9266	0.9250	3.7000	(65 ksi) A572-65
L25	81.50-81.25	0.25	0.00	18	30.9266	30.9737	0.9500	3.8000	(65 ksi) A572-65
L26	81.25-76.25	5.00	0.00	18	30.9737	31.9146	0.9250	3.7000	(65 ksi) A572-65
L27	76.25-71.25	5.00	0.00	18	31.9146	32.8556	0.9000	3.6000	(65 ksi) A572-65
L28	71.25-66.25	5.00	0.00	18	32.8556	33.7966	0.8750	3.5000	(65 ksi) A572-65
L29	66.25-61.25	5.00	0.00	18	33.7966	34.7376	0.8625	3.4500	(65 ksi) A572-65
L30	61.25-56.25	5.00	0.00	18	34.7376	35.6785	0.8500	3.4000	(65 ksi) A572-65
L31	56.25-51.25	5.00	0.00	18	35.6785	36.6195	0.8250	3.3000	(65 ksi) A572-65
L32	51.25-43.33	7.92	5.33	18	36.6195	38.1100	0.8250	3.3000	(65 ksi) A572-65
L33	43.33-42.33	6.33	0.00	18	36.3569	37.5463	1.0375	4.1500	(65 ksi) A572-65
L34	42.33-37.40	4.93	0.00	18	37.5463	38.4726	1.0250	4.1000	(65 ksi) A572-65
L35	37.40-37.15	0.25	0.00	18	38.4726	38.5196	1.0250	4.1000	(65 ksi) A572-65
L36	37.15-32.15	5.00	0.00	18	38.5196	39.4591	1.0000	4.0000	(65 ksi) A572-65

Section	Elevation ft	Section Length ft	Splice Length ft	Number of Sides	Top Diameter in	Bottom Diameter in	Wall Thickness in	Bend Radius in	Pole Grade
L37	32.15-27.15	5.00	0.00	18	39.4591	40.3986	0.9750	3.9000	A572-65 (65 ksi)
L38	27.15-22.15	5.00	0.00	18	40.3986	41.3381	0.9625	3.8500	A572-65 (65 ksi)
L39	22.15-19.50	2.65	0.00	18	41.3381	41.8360	0.9500	3.8000	A572-65 (65 ksi)
L40	19.50-19.25	0.25	0.00	18	41.8360	41.8830	1.0250	4.1000	A572-65 (65 ksi)
L41	19.25-14.25	5.00	0.00	18	41.8830	42.8225	1.0000	4.0000	A572-65 (65 ksi)
L42	14.25-9.25	5.00	0.00	18	42.8225	43.7620	1.0000	4.0000	A572-65 (65 ksi)
L43	9.25-9.00	0.25	0.00	18	43.7620	43.8089	1.0000	4.0000	A572-65 (65 ksi)
L44	9.00-8.75	0.25	0.00	18	43.8089	43.8559	1.0250	4.1000	A572-65 (65 ksi)
L45	8.75-7.00	1.75	0.00	18	43.8559	44.1847	1.0250	4.1000	A572-65 (65 ksi)
L46	7.00-6.75	0.25	0.00	18	44.1847	44.2317	0.9750	3.9000	A572-65 (65 ksi)
L47	6.75-5.00	1.75	0.00	18	44.2317	44.5605	0.9750	3.9000	A572-65 (65 ksi)
L48	5.00-4.75	0.25	0.00	18	44.5605	44.6075	1.4500	5.8000	A572-65 (65 ksi)
L49	4.75-3.00	1.75	0.00	18	44.6075	44.9363	1.4250	5.7000	A572-65 (65 ksi)
L50	3.00-2.75	0.25	0.00	18	44.9363	44.9833	1.4500	5.8000	A572-65 (65 ksi)
L51	2.75-2.25	0.50	0.00	18	44.9833	45.0772	1.4500	5.8000	A572-65 (65 ksi)
L52	2.25-2.00	0.25	0.00	18	45.0772	45.1242	1.2000	4.8000	A572-65 (65 ksi)
L53	2.00-0.00	2.00		18	45.1242	45.5000	1.1750	4.7000	A572-65 (65 ksi)

### Tapered Pole Properties

Section	Tip Dia. in	Area in <sup>2</sup>	I in <sup>4</sup>	r in	C in	I/C in <sup>3</sup>	J in <sup>4</sup>	I/Q in <sup>2</sup>	w in	w/t
L1	15.7005	12.1009	355.5445	5.4138	7.8740	45.1542	711.5567	6.0516	2.2880	9.152
	16.6699	12.8583	426.5776	5.7526	8.3589	51.0326	853.7164	6.4304	2.4560	9.824
L2	16.6699	12.8583	426.5776	5.7526	8.3589	51.0326	853.7164	6.4304	2.4560	9.824
	17.6392	13.6158	506.4925	6.0915	8.8439	57.2705	1013.6514	6.8092	2.6240	10.496
L3	17.6392	13.6158	506.4925	6.0915	8.8439	57.2705	1013.6514	6.8092	2.6240	10.496
	18.6085	14.3733	595.8124	6.4304	9.3288	63.8682	1192.4089	7.1880	2.7920	11.168
L4	18.6085	14.3733	595.8124	6.4304	9.3288	63.8682	1192.4089	7.1880	2.7920	11.168
	19.5778	15.1307	695.0606	6.7693	9.8137	70.8254	1391.0358	7.5668	2.9600	11.84
L5	19.5778	15.1307	695.0606	6.7693	9.8137	70.8254	1391.0358	7.5668	2.9600	11.84
	20.5471	15.8882	804.7602	7.1081	10.2986	78.1424	1610.5794	7.9456	3.1280	12.512
L6	20.5471	15.8882	804.7602	7.1081	10.2986	78.1424	1610.5794	7.9456	3.1280	12.512
	21.5164	16.6456	925.4345	7.4470	10.7836	85.8189	1852.0868	8.3244	3.2960	13.184
L7	21.5164	16.6456	925.4345	7.4470	10.7836	85.8189	1852.0868	8.3244	3.2960	13.184
	22.6156	17.5046	1076.2196	7.8313	11.3335	94.9593	2153.8554	8.7540	3.4866	13.946
L8	22.0888	20.6922	1137.7489	7.4059	10.7565	105.7730	2276.9949	10.3481	3.1767	10.165
	22.4078	21.6252	1298.6833	7.7398	11.2343	115.5995	2599.0754	10.8146	3.3422	10.695
L9	22.4078	21.6252	1298.6833	7.7398	11.2343	115.5995	2599.0754	10.8146	3.3422	10.695
	23.3629	22.5581	1474.1202	8.0737	11.7122	125.8625	2950.1801	11.2812	3.5078	11.225
L10	23.3629	22.5581	1474.1202	8.0737	11.7122	125.8625	2950.1801	11.2812	3.5078	11.225
	24.3180	23.4911	1664.6854	8.4076	12.1900	136.5619	3331.5612	11.7478	3.6733	11.755
L11	24.3180	23.4911	1664.6854	8.4076	12.1900	136.5619	3331.5612	11.7478	3.6733	11.755
	25.2731	24.4240	1871.0044	8.7416	12.6678	147.6978	3744.4707	12.2143	3.8388	12.284
L12	25.2731	24.4240	1871.0044	8.7416	12.6678	147.6978	3744.4707	12.2143	3.8388	12.284
	26.2282	25.3570	2093.7030	9.0755	13.1456	159.2702	4190.1609	12.6809	4.0044	12.814

Section	Tip Dia. in	Area in <sup>2</sup>	I in <sup>4</sup>	r in	C in	I/C in <sup>3</sup>	J in <sup>4</sup>	I/Q in <sup>2</sup>	w in	w/t
L13	26.2282	25.3570	2093.7030	9.0755	13.1456	159.2702	4190.1609	12.6809	4.0044	12.814
	26.3542	25.4801	2124.3562	9.1195	13.2087	160.8304	4251.5076	12.7425	4.0262	12.884
L14	26.3137	46.4043	3790.2095	9.0263	13.2087	286.9485	7585.4063	23.2066	3.5642	6.199
	26.3615	46.4902	3811.2799	9.0430	13.2326	288.0227	7627.5747	23.2495	3.5725	6.213
L15	26.3634	45.5018	3733.9174	9.0475	13.2326	282.1764	7472.7479	22.7552	3.5945	6.39
	27.3185	47.1811	4162.7761	9.3814	13.7104	303.6222	8331.0298	23.5950	3.7601	6.685
L16	27.3204	46.1545	4076.0486	9.3858	13.7104	297.2965	8157.4605	23.0816	3.7821	6.876
	28.1323	47.5501	4457.1145	9.6696	14.1165	315.7373	8920.0938	23.7796	3.9228	7.132
L17	28.0648	84.0029	7623.0995	9.5143	14.1165	540.0124	15256.229	42.0094	3.1528	3.193
	28.1125	84.1503	7663.3002	9.5310	14.1404	541.9429	15336.683	42.0831	3.1610	3.201
L18	28.1125	84.1503	7663.3002	9.5310	14.1404	541.9429	15336.683	42.0831	3.1610	3.201
	28.1603	84.2977	7703.6419	9.5477	14.1643	543.8770	15417.420	42.1568	3.1693	3.209
L19	28.2008	62.4935	5823.0659	9.6409	14.1643	411.1083	11653.794	31.2527	3.6313	5.009
	28.2485	62.6017	5853.3701	9.6576	14.1882	412.5520	11714.442	31.3068	3.6396	5.02
L20	28.2505	61.5506	5760.3830	9.6620	14.1882	405.9981	11528.345	30.7812	3.6616	5.139
	29.2056	63.6777	6378.4737	9.9960	14.6660	434.9152	12765.340	31.8449	3.8271	5.371
L21	29.2075	62.5884	6274.9201	10.0004	14.6660	427.8544	12558.096	31.3001	3.8491	5.499
	30.7204	65.8986	7324.1268	10.5293	15.4229	474.8871	14657.890	32.9556	4.1114	5.873
L22	30.0494	83.2668	8237.5165	9.9339	14.6916	560.6960	16485.872	41.6413	3.4400	3.669
	30.2405	86.2516	9155.4967	10.2900	15.2012	602.2896	18323.040	43.1340	3.6165	3.858
L23	30.2425	85.1382	9045.1152	10.2945	15.2012	595.0282	18102.132	42.5772	3.6385	3.934
	31.1979	87.9009	9954.5110	10.6285	15.6792	634.8877	19922.120	43.9588	3.8042	4.113
L24	31.1979	87.9009	9954.5110	10.6285	15.6792	634.8877	19922.120	43.9588	3.8042	4.113
	31.2610	88.0832	10016.586	10.6506	15.7107	637.5639	20046.352	44.0500	3.8151	4.124
L25	31.2571	90.3885	10261.609	10.6417	15.7107	653.1598	20536.721	45.2028	3.7711	3.97
	31.3049	90.5303	10310.002	10.6584	15.7346	655.2433	20633.571	45.2738	3.7794	3.978
L26	31.3088	88.2214	10063.784	10.6673	15.7346	639.5951	20140.811	44.1191	3.8234	4.133
	32.2643	90.9840	11039.141	11.0013	16.2126	680.8976	22092.809	45.5006	3.9890	4.312
L27	32.2681	88.5964	10766.802	11.0102	16.2126	664.0996	21547.771	44.3066	4.0330	4.481
	33.2236	91.2844	11776.818	11.3442	16.6906	705.5939	23569.133	45.6509	4.1986	4.665
L28	33.2275	88.8181	11476.578	11.3531	16.6906	687.6054	22968.257	44.4175	4.2426	4.849
	34.1830	91.4315	12519.712	11.6872	17.1687	729.2189	25055.898	45.7244	4.4082	5.038
L29	34.1849	90.1595	12354.921	11.6916	17.1687	719.6206	24726.100	45.0883	4.4302	5.136
	35.1404	92.7355	13444.459	12.0256	17.6467	761.8692	26906.610	46.3766	4.5958	5.328
L30	35.1423	91.4252	13264.285	12.0301	17.6467	751.6591	26546.024	45.7213	4.6178	5.433
	36.0978	93.9639	14400.200	12.3641	18.1247	794.5074	28819.348	46.9909	4.7834	5.628
L31	36.1017	91.2657	14006.784	12.3730	18.1247	772.8013	28031.998	45.6415	4.8274	5.851

Section	Tip Dia. in	Area in <sup>2</sup>	I in <sup>4</sup>	r in	C in	I/C in <sup>3</sup>	J in <sup>4</sup>	I/Q in <sup>2</sup>	w in	w/t
	37.0571	93.7297	15172.1509	12.7070	18.6027	815.5884	30364.2656	46.8737	4.9930	6.052
L32	37.0571	93.7297	15172.1509	12.7070	18.6027	815.5884	30364.2656	46.8737	4.9930	6.052
	38.5706	97.6326	17147.4981	13.2362	19.3599	885.7234	34317.5593	48.8256	5.2554	6.37
L33	37.7747	116.3077	18330.4553	12.5384	18.4693	992.4815	36685.0303	58.1649	4.5728	4.408
	37.9655	120.2244	20245.3629	12.9606	19.0735	1061.4379	40517.3652	60.1236	4.7822	4.609
L34	37.9674	118.8166	20021.9944	12.9651	19.0735	1049.7269	40070.3343	59.4196	4.8042	4.687
	38.9080	121.8303	21584.4886	13.2939	19.5441	1104.3990	43197.3786	60.9267	4.9672	4.846
L35	38.9080	121.8303	21584.4886	13.2939	19.5441	1104.3990	43197.3786	60.9267	4.9672	4.846
	38.9557	121.9831	21665.8172	13.3106	19.5680	1107.2084	43360.1429	61.0032	4.9755	4.854
L36	38.9596	119.0873	21179.6917	13.3195	19.5680	1082.3655	42387.2522	59.5550	5.0195	5.019
	39.9136	122.0692	22810.8724	13.6530	20.0452	1137.9704	45651.7599	61.0462	5.1848	5.185
L37	39.9174	119.0948	22284.0007	13.6619	20.0452	1111.6862	44597.3232	59.5587	5.2288	5.363
	40.8714	122.0022	23956.1780	13.9954	20.5225	1167.3137	47943.8782	61.0127	5.3942	5.532
L38	40.8733	120.4763	23671.5498	13.9998	20.5225	1153.4447	47374.2473	60.2496	5.4162	5.627
	41.8273	123.3464	25403.9552	14.3333	20.9997	1209.7269	50841.3375	61.6849	5.5815	5.799
L39	41.8292	121.7822	25097.3291	14.3378	20.9997	1195.1255	50227.6820	60.9027	5.6035	5.898
	42.3348	123.2836	26037.0633	14.5145	21.2527	1225.1185	52108.3868	61.6535	5.6911	5.991
L40	42.3233	132.7725	27938.3076	14.4879	21.2527	1314.5775	55913.3772	66.3989	5.5591	5.424
	42.3710	132.9253	28034.8914	14.5046	21.2766	1317.6425	56106.6719	66.4753	5.5674	5.432
L41	42.3748	129.7626	27401.3507	14.5135	21.2766	1287.8661	54838.7569	64.8936	5.6114	5.611
	43.3288	132.7445	29334.1325	14.8470	21.7538	1348.4594	58706.8636	66.3849	5.7768	5.777
L42	43.3288	132.7445	29334.1325	14.8470	21.7538	1348.4594	58706.8636	66.3849	5.7768	5.777
	44.2828	135.7264	31355.7292	15.1805	22.2311	1410.4462	62752.7170	67.8761	5.9421	5.942
L43	44.2828	135.7264	31355.7292	15.1805	22.2311	1410.4462	62752.7170	67.8761	5.9421	5.942
	44.3305	135.8755	31459.1762	15.1972	22.2549	1413.5821	62959.7471	67.9507	5.9504	5.95
L44	44.3266	139.1911	32189.1951	15.1883	22.2549	1446.3847	64420.7456	69.6088	5.9064	5.762
	44.3743	139.3439	32295.3372	15.2050	22.2788	1449.5997	64633.1695	69.6852	5.9146	5.77
L45	44.3743	139.3439	32295.3372	15.2050	22.2788	1449.5997	64633.1695	69.6852	5.9146	5.77
	44.7082	140.4137	33044.8726	15.3217	22.4458	1472.2049	66133.2265	70.2202	5.9725	5.827
L46	44.7159	133.7190	31542.2982	15.3395	22.4458	1405.2627	63126.1005	66.8722	6.0605	6.216
	44.7636	133.8643	31645.2812	15.3561	22.4697	1408.3535	63332.2020	66.9449	6.0688	6.224
L47	44.7636	133.8643	31645.2812	15.3561	22.4697	1408.3535	63332.2020	66.9449	6.0688	6.224
	45.0975	134.8819	32372.4452	15.4729	22.6367	1430.0842	64787.4869	67.4538	6.1267	6.284



Section	Tip Dia. in	Area in <sup>2</sup>	I in <sup>4</sup>	r in	C in	I/C in <sup>3</sup>	J in <sup>4</sup>	I/Q in <sup>2</sup>	w in	w/t
L48	45.0242	198.4075	46586.703 2	15.3042	22.6367	2058.0128	93234.706 4	99.2226	5.2907	3.649
	45.0719	198.6237	46739.155 3	15.3209	22.6606	2062.5732	93539.811 2	99.3307	5.2989	3.654
L49	45.0758	195.3122	46013.177 9	15.3298	22.6606	2030.5362	92086.901 2	97.6747	5.3429	3.749
	45.4097	196.7995	47072.326 8	15.4465	22.8276	2062.0755	94206.592 5	98.4184	5.4008	3.79
L50	45.4058	200.1370	47815.642 9	15.4376	22.8276	2094.6376	95694.202 9	100.0875	5.3568	3.694
	45.4535	200.3532	47970.763 0	15.4543	22.8515	2099.2384	96004.647 2	100.1957	5.3651	3.7
L51	45.4535	200.3532	47970.763 0	15.4543	22.8515	2099.2384	96004.647 2	100.1957	5.3651	3.7
	45.5489	200.7856	48282.008 9	15.4877	22.8992	2108.4552	96627.548 6	100.4119	5.3816	3.711
L52	45.5875	167.1196	40648.382 1	15.5764	22.8992	1775.0979	81350.250 5	83.5757	5.8216	4.851
	45.6352	167.2985	40779.074 6	15.5931	22.9231	1778.9514	81611.807 3	83.6652	5.8299	4.858
L53	45.6391	163.9064	39997.728 5	15.6020	22.9231	1744.8659	80048.086 9	81.9688	5.8739	4.999
	46.0206	165.3079	41032.546 7	15.7354	23.1140	1775.2248	82119.085 0	82.6696	5.9400	5.055

Tower Elevation ft	Gusset Area (per face) ft <sup>2</sup>	Gusset Thickness in	Gusset Grade	Adjust. Factor A <sub>r</sub>	Adjust. Factor A <sub>r</sub>	Weight Mult.	Double Angle Stitch Bolt Spacing Diagonals in	Double Angle Stitch Bolt Spacing Horizontals in	Double Angle Stitch Bolt Spacing Redundants in
L1 169.00-164.00				1	1	1			
L2 164.00-159.00				1	1	1			
L3 159.00-154.00				1	1	1			
L4 154.00-149.00				1	1	1			
L5 149.00-144.00				1	1	1			
L6 144.00-139.00				1	1	1			
L7 139.00-133.33				1	1	1			
L8 133.33-131.66				1	1	1			
L9 131.66-126.66				1	1	1			
L10 126.66-121.66				1	1	1			
L11 121.66-116.66				1	1	1			
L12 116.66-111.66				1	1	1			
L13 111.66-111.00				1	1	1			
L14 111.00-110.75				1	1	0.936271			
L15 110.75-105.75				1	1	0.942334			
L16 105.75-101.50				1	1	0.951697			
L17 101.50-101.25				1	1	0.894841			
L18 101.25-				1	1	0.893829			

Tower Elevation ft	Gusset Area (per face) ft <sup>2</sup>	Gusset Thickness in	Gusset Grade	Adjust. Factor A <sub>r</sub>	Adjust. Factor A <sub>r</sub>	Weight Mult.	Double Angle Stitch Bolt Spacing Diagonals in	Double Angle Stitch Bolt Spacing Horizontals in	Double Angle Stitch Bolt Spacing Redundants in
101.00									
L19 101.00-100.75				1	1	0.916808			
L20 100.75-95.75				1	1	0.915966			
L21 95.75-87.83				1	1	0.920543			
L22 87.83-86.83				1	1	0.912119			
L23 86.83-81.83				1	1	0.907746			
L24 81.83-81.50				1	1	0.906706			
L25 81.50-81.25				1	1	0.899386			
L26 81.25-76.25				1	1	0.907211			
L27 76.25-71.25				1	1	0.916495			
L28 71.25-66.25				1	1	0.92727			
L29 66.25-61.25				1	1	0.926308			
L30 61.25-56.25				1	1	0.926118			
L31 56.25-51.25				1	1	0.940381			
L32 51.25-43.33				1	1	0.933854			
L33 43.33-42.33				1	1	0.941952			
L34 42.33-37.40				1	1	0.938586			
L35 37.40-37.15				1	1	0.937868			
L36 37.15-32.15				1	1	0.946368			
L37 32.15-27.15				1	1	0.956053			
L38 27.15-22.15				1	1	0.9547			
L39 22.15-19.50				1	1	0.959994			
L40 19.50-19.25				1	1	0.954729			
L41 19.25-14.25				1	1	0.964453			
L42 14.25-9.25				1	1	0.951503			
L43 9.25-9.00				1	1	0.95087			
L44 9.00-8.75				1	1	0.963488			
L45 8.75-7.00				1	1	0.958934			
L46 7.00-6.75				1	1	0.968915			
L47 6.75-5.00				1	1	0.964507			
L48 5.00-4.75				1	1	0.856655			
L49 4.75-3.00				1	1	0.866584			
L50 3.00-2.75				1	1	0.876449			
L51 2.75-2.25				1	1	0.875119			
L52 2.25-2.00				1	1	0.856349			
L53 2.00-0.00				1	1	0.869367			

**Feed Line/Linear Appurtenances - Entered As Round Or Flat**

Description	Sector	Exclude From Torque Calculation	Component Type	Placement ft	Total Number	Number Per Row	Start/End Position	Width or Diameter in	Perimeter in	Weight plf
CCI-065125 Reinforcement	A	No	Surface Af (CaAa)	22.25 - 0.00	1	1	0.333 - 0.333	6.5000	15.5000	0.00
CCI-065125 Reinforcement	A	No	Surface Af (CaAa)	22.25 - 0.00	1	1	-0.333 - -0.333	6.5000	15.5000	0.00
CCI-065125 Reinforcement	C	No	Surface Af (CaAa)	22.25 - 0.00	1	1	-0.167 - -0.167	6.5000	15.5000	0.00
CCI-065125 Reinforcement	B	No	Surface Af (CaAa)	22.25 - 0.00	1	1	0.167 - 0.167	6.5000	15.5000	0.00
CCI-060100 Reinforcement	A	No	Surface Af (CaAa)	45.10 - 22.25	1	1	0.333 - 0.333	6.0000	14.0000	0.00
CCI-060100 Reinforcement	A	No	Surface Af (CaAa)	47.33 - 45.10	1	1	0.333 - 0.333	6.0000	14.0000	0.00
CCI-060100 Reinforcement	A	No	Surface Af (CaAa)	45.10 - 22.25	1	1	-0.333 - -0.333	6.0000	14.0000	0.00
CCI-060100 Reinforcement	A	No	Surface Af (CaAa)	47.33 - 45.10	1	1	-0.333 - -0.333	6.0000	14.0000	0.00
CCI-060100 Reinforcement	C	No	Surface Af (CaAa)	45.10 - 22.25	1	1	-0.167 - -0.167	6.0000	14.0000	0.00
CCI-060100 Reinforcement	C	No	Surface Af (CaAa)	47.33 - 45.10	1	1	-0.167 - -0.167	6.0000	14.0000	0.00
CCI-060100 Reinforcement	B	No	Surface Af (CaAa)	45.10 - 22.25	1	1	0.167 - 0.167	6.0000	14.0000	0.00
CCI-060100 Reinforcement	B	No	Surface Af (CaAa)	47.33 - 45.10	1	1	0.167 - 0.167	6.0000	14.0000	0.00
CCI-045100 Reinforcement	A	No	Surface Af (CaAa)	90.00 - 80.00	1	1	0.167 - 0.167	4.5000	11.0000	0.00
CCI-045100 Reinforcement	C	No	Surface Af (CaAa)	90.00 - 80.00	1	1	0.167 - 0.167	4.5000	11.0000	0.00
CCI-045100 Reinforcement	B	No	Surface Af (CaAa)	90.00 - 80.00	1	1	0.167 - 0.167	4.5000	11.0000	0.00
*****										
CCI-065125 Reinforcement	B	No	Surface Af (CaAa)	26.01 - 0.00	1	1	-0.500 - -0.500	6.5000	15.5000	0.00
CCI-065125 Reinforcement	B	No	Surface Af (CaAa)	81.80 - 26.01	1	1	-0.500 - -0.500	6.5000	15.5000	0.00
CCI-065125 Reinforcement	A	No	Surface Af (CaAa)	26.01 - 0.00	1	1	0.000 - 0.000	6.5000	15.5000	0.00
CCI-065125 Reinforcement	A	No	Surface Af (CaAa)	81.80 - 26.01	1	1	0.000 - 0.000	6.5000	15.5000	0.00
CCI-065125 Reinforcement	A	No	Surface Af (CaAa)	26.01 - 0.00	1	1	-0.500 - -0.500	6.5000	15.5000	0.00
CCI-065125 Reinforcement	A	No	Surface Af (CaAa)	81.80 - 26.01	1	1	-0.500 - -0.500	6.5000	15.5000	0.00
CCI-065125 Reinforcement	C	No	Surface Af (CaAa)	26.01 - 0.00	1	1	0.000 - 0.000	6.5000	15.5000	0.00
CCI-065125 Reinforcement	C	No	Surface Af (CaAa)	81.80 - 26.01	1	1	0.000 - 0.000	6.5000	15.5000	0.00
CCI-065125 Reinforcement	C	No	Surface Af (CaAa)	26.01 - 0.00	1	1	-0.500 - -0.500	6.5000	15.5000	0.00
CCI-065125 Reinforcement	C	No	Surface Af (CaAa)	81.80 - 26.01	1	1	-0.500 - -0.500	6.5000	15.5000	0.00
CCI-065125 Reinforcement	B	No	Surface Af (CaAa)	26.01 - 0.00	1	1	0.000 - 0.000	6.5000	15.5000	0.00
CCI-065125 Reinforcement	B	No	Surface Af (CaAa)	81.80 - 26.01	1	1	0.000 - 0.000	6.5000	15.5000	0.00
CCI-040125 Reinforcement	B	No	Surface Af (CaAa)	104.00 - 81.80	1	1	-0.500 - -0.500	4.0000	10.5000	0.00
CCI-040125 Reinforcement	A	No	Surface Af (CaAa)	104.00 - 81.80	1	1	0.000 - 0.000	4.0000	10.5000	0.00
CCI-040125 Reinforcement	A	No	Surface Af (CaAa)	104.00 - 81.80	1	1	-0.500 - -0.500	4.0000	10.5000	0.00

Description	Sector	Exclude From Torque Calculation	Component Type	Placement ft	Total Number	Number Per Row	Start/End Position	Width or Diameter in	Perimeter in	Weight plf
Reinforcement CCI-040125	C	No	(CaAa) Surface Af	81.80 104.00 -	1	1	-0.500 0.000	4.0000	10.5000	0.00
Reinforcement CCI-040125	C	No	(CaAa) Surface Af	81.80 104.00 -	1	1	0.000 -0.500	4.0000	10.5000	0.00
Reinforcement CCI-040125	B	No	(CaAa) Surface Af	81.80 104.00 -	1	1	-0.500 0.000	4.0000	10.5000	0.00
Reinforcement CCI-040125			(CaAa)	81.80			0.000			
*****										
Reinforcement CCI-060100	A	No	(CaAa) Surface Af	108.25 - 98.25	1	1	0.167 0.167	6.0000	14.0000	0.00
Reinforcement CCI-060100	C	No	(CaAa) Surface Af	108.25 - 98.25	1	1	0.167 0.167	6.0000	14.0000	0.00
Reinforcement CCI-060100	B	No	(CaAa) Surface Af	108.25 - 98.25	1	1	0.167 0.167	6.0000	14.0000	0.00
Reinforcement CCI-060100			(CaAa)	98.25			0.167			
***										
LDF7-50A(1-5/8)	B	No	Surface Ar (CaAa)	138.00 - 0.00	6	6	0.170 0.373	1.9800		0.82
LDF4-50A(1/2)	C	No	Surface Ar (CaAa)	124.00 - 0.00	2	1	-0.487 -0.487	0.6250		0.15
2" (Nominal) Conduit	C	No	Surface Ar (CaAa)	124.00 - 0.00	2	2	-0.500 -0.395	2.3750		0.72
***										
EC4-50(1/2)	B	No	Surface Ar (CaAa)	118.00 - 0.00	1	1	0.411 0.411	0.6300		0.16
***										
LDF7-50A(1-5/8)	A	No	Surface Ar (CaAa)	111.00 - 0.00	20	9	-0.177 0.137	1.9800		0.82

### Feed Line/Linear Appurtenances - Entered As Area

Description	Face or Leg	Allow Shield	Exclude From Torque Calculation	Component Type	Placement ft	Total Number		C <sub>A</sub> A <sub>A</sub> ft <sup>2</sup> /ft	Weight plf
*****									
LDF7-50A(1-5/8)	C	No	No	Inside Pole	165.00 - 0.00	6	No Ice	0.00	0.82
							1/2" Ice	0.00	0.82
							1" Ice	0.00	0.82
							2" Ice	0.00	0.82
HCS 6X12 6AWG(1-3/8)	C	No	No	Inside Pole	165.00 - 0.00	2	No Ice	0.00	1.70
							1/2" Ice	0.00	1.70
							1" Ice	0.00	1.70
							2" Ice	0.00	1.70
HCS 6X12 4AWG(1-5/8)	C	No	No	Inside Pole	165.00 - 0.00	1	No Ice	0.00	2.40
							1/2" Ice	0.00	2.40
							1" Ice	0.00	2.40
							2" Ice	0.00	2.40
***									
LDF7-50A(1-5/8)	C	No	No	Inside Pole	156.00 - 0.00	12	No Ice	0.00	0.82
							1/2" Ice	0.00	0.82
							1" Ice	0.00	0.82
							2" Ice	0.00	0.82
A-DQZNB2YN1750 N(17/64)	C	No	No	Inside Pole	156.00 - 0.00	1	No Ice	0.00	0.03
							1/2" Ice	0.00	0.03
							1" Ice	0.00	0.03
							2" Ice	0.00	0.03
WR-VG86ST-BRDA(7/8)	C	No	No	Inside Pole	156.00 - 0.00	2	No Ice	0.00	0.68
							1/2" Ice	0.00	0.68
							1" Ice	0.00	0.68
							2" Ice	0.00	0.68

Description	Face or Leg	Allow Shield	Exclude From Torque Calculation	Component Type	Placement ft	Total Number		C <sub>A</sub> A <sub>A</sub> ft <sup>2</sup> /ft	Weight plf
***									
HB114-1-08U4-M5F(1-1/4)	C	No	No	Inside Pole	148.00 - 0.00	3	No Ice	0.00	1.08
							1/2" Ice	0.00	1.08
							1" Ice	0.00	1.08
							2" Ice	0.00	1.08
***									
LDF1-50A(1/4)	C	No	No	Inside Pole	124.00 - 0.00	3	No Ice	0.00	0.06
							1/2" Ice	0.00	0.06
							1" Ice	0.00	0.06
							2" Ice	0.00	0.06
LDF4-50A(1/2)	C	No	No	Inside Pole	124.00 - 0.00	4	No Ice	0.00	0.15
							1/2" Ice	0.00	0.15
							1" Ice	0.00	0.15
							2" Ice	0.00	0.15
9207(5/16)	C	No	No	Inside Pole	124.00 - 0.00	1	No Ice	0.00	0.06
							1/2" Ice	0.00	0.06
							1" Ice	0.00	0.06
							2" Ice	0.00	0.06

**Feed Line/Linear Appurtenances Section Areas**

Tower Section	Tower Elevation ft	Face	A <sub>R</sub> ft <sup>2</sup>	A <sub>F</sub> ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>	Weight K
L1	169.00-164.00	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.000	0.00
		C	0.000	0.000	0.000	0.000	0.01
L2	164.00-159.00	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.000	0.00
		C	0.000	0.000	0.000	0.000	0.05
L3	159.00-154.00	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.000	0.00
		C	0.000	0.000	0.000	0.000	0.08
L4	154.00-149.00	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.000	0.00
		C	0.000	0.000	0.000	0.000	0.11
L5	149.00-144.00	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.000	0.00
		C	0.000	0.000	0.000	0.000	0.12
L6	144.00-139.00	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.000	0.00
		C	0.000	0.000	0.000	0.000	0.13
L7	139.00-133.33	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	5.548	0.000	0.02
		C	0.000	0.000	0.000	0.000	0.14
L8	133.33-131.66	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	1.984	0.000	0.01
		C	0.000	0.000	0.000	0.000	0.04
L9	131.66-126.66	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	5.940	0.000	0.02
		C	0.000	0.000	0.000	0.000	0.13
L10	126.66-121.66	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	5.940	0.000	0.02
		C	0.000	0.000	1.258	0.000	0.13
L11	121.66-116.66	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	6.024	0.000	0.02
		C	0.000	0.000	2.688	0.000	0.14
L12	116.66-111.66	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	6.255	0.000	0.03
		C	0.000	0.000	2.688	0.000	0.14
L13	111.66-111.00	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.826	0.000	0.00

Tower Sectio n	Tower Elevation ft	Face	A <sub>R</sub> ft <sup>2</sup>	A <sub>F</sub> ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>	Weight K
L14	111.00-110.75	C	0.000	0.000	0.355	0.000	0.02
		A	0.000	0.000	0.446	0.000	0.00
		B	0.000	0.000	0.313	0.000	0.00
		C	0.000	0.000	0.134	0.000	0.01
L15	110.75-105.75	A	0.000	0.000	11.190	0.000	0.08
		B	0.000	0.000	8.535	0.000	0.03
		C	0.000	0.000	4.968	0.000	0.14
L16	105.75-101.50	A	0.000	0.000	14.783	0.000	0.07
		B	0.000	0.000	12.527	0.000	0.02
		C	0.000	0.000	9.494	0.000	0.12
L17	101.50-101.25	A	0.000	0.000	1.007	0.000	0.00
		B	0.000	0.000	0.874	0.000	0.00
		C	0.000	0.000	0.696	0.000	0.01
L18	101.25-101.00	A	0.000	0.000	1.007	0.000	0.00
		B	0.000	0.000	0.874	0.000	0.00
		C	0.000	0.000	0.696	0.000	0.01
L19	101.00-100.75	A	0.000	0.000	1.007	0.000	0.00
		B	0.000	0.000	0.874	0.000	0.00
		C	0.000	0.000	0.696	0.000	0.01
L20	100.75-95.75	A	0.000	0.000	17.857	0.000	0.08
		B	0.000	0.000	15.202	0.000	0.03
		C	0.000	0.000	11.634	0.000	0.14
L21	95.75-87.83	A	0.000	0.000	26.301	0.000	0.13
		B	0.000	0.000	22.095	0.000	0.04
		C	0.000	0.000	16.445	0.000	0.22
L22	87.83-86.83	A	0.000	0.000	3.865	0.000	0.02
		B	0.000	0.000	3.334	0.000	0.01
		C	0.000	0.000	2.621	0.000	0.03
L23	86.83-81.83	A	0.000	0.000	19.327	0.000	0.08
		B	0.000	0.000	16.672	0.000	0.03
		C	0.000	0.000	13.104	0.000	0.14
L24	81.83-81.50	A	0.000	0.000	1.526	0.000	0.01
		B	0.000	0.000	1.350	0.000	0.00
		C	0.000	0.000	1.115	0.000	0.01
L25	81.50-81.25	A	0.000	0.000	1.175	0.000	0.00
		B	0.000	0.000	1.042	0.000	0.00
		C	0.000	0.000	0.864	0.000	0.01
L26	81.25-76.25	A	0.000	0.000	20.681	0.000	0.08
		B	0.000	0.000	18.026	0.000	0.03
		C	0.000	0.000	14.458	0.000	0.14
L27	76.25-71.25	A	0.000	0.000	19.743	0.000	0.08
		B	0.000	0.000	17.088	0.000	0.03
		C	0.000	0.000	13.521	0.000	0.14
L28	71.25-66.25	A	0.000	0.000	19.743	0.000	0.08
		B	0.000	0.000	17.088	0.000	0.03
		C	0.000	0.000	13.521	0.000	0.14
L29	66.25-61.25	A	0.000	0.000	19.743	0.000	0.08
		B	0.000	0.000	17.088	0.000	0.03
		C	0.000	0.000	13.521	0.000	0.14
L30	61.25-56.25	A	0.000	0.000	19.743	0.000	0.08
		B	0.000	0.000	17.088	0.000	0.03
		C	0.000	0.000	13.521	0.000	0.14
L31	56.25-51.25	A	0.000	0.000	19.743	0.000	0.08
		B	0.000	0.000	17.088	0.000	0.03
		C	0.000	0.000	13.521	0.000	0.14
L32	51.25-43.33	A	0.000	0.000	37.680	0.000	0.13
		B	0.000	0.000	30.271	0.000	0.04
		C	0.000	0.000	24.620	0.000	0.22
L33	43.33-42.33	A	0.000	0.000	5.949	0.000	0.02
		B	0.000	0.000	4.418	0.000	0.01
		C	0.000	0.000	3.704	0.000	0.03
L34	42.33-37.40	A	0.000	0.000	29.327	0.000	0.08
		B	0.000	0.000	21.779	0.000	0.03
		C	0.000	0.000	18.262	0.000	0.14
L35	37.40-37.15	A	0.000	0.000	1.487	0.000	0.00

Tower Section n	Tower Elevation ft	Face	A <sub>R</sub> ft <sup>2</sup>	A <sub>F</sub> ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>	Weight K
		B	0.000	0.000	1.104	0.000	0.00
		C	0.000	0.000	0.926	0.000	0.01
L36	37.15-32.15	A	0.000	0.000	29.743	0.000	0.08
		B	0.000	0.000	22.088	0.000	0.03
		C	0.000	0.000	18.521	0.000	0.14
L37	32.15-27.15	A	0.000	0.000	29.743	0.000	0.08
		B	0.000	0.000	22.088	0.000	0.03
		C	0.000	0.000	18.521	0.000	0.14
L38	27.15-22.15	A	0.000	0.000	29.760	0.000	0.08
		B	0.000	0.000	22.097	0.000	0.03
		C	0.000	0.000	18.529	0.000	0.14
L39	22.15-19.50	A	0.000	0.000	16.206	0.000	0.04
		B	0.000	0.000	11.928	0.000	0.01
		C	0.000	0.000	10.037	0.000	0.07
L40	19.50-19.25	A	0.000	0.000	1.529	0.000	0.00
		B	0.000	0.000	1.125	0.000	0.00
		C	0.000	0.000	0.947	0.000	0.01
L41	19.25-14.25	A	0.000	0.000	30.577	0.000	0.08
		B	0.000	0.000	22.505	0.000	0.03
		C	0.000	0.000	18.938	0.000	0.14
L42	14.25-9.25	A	0.000	0.000	30.577	0.000	0.08
		B	0.000	0.000	22.505	0.000	0.03
		C	0.000	0.000	18.938	0.000	0.14
L43	9.25-9.00	A	0.000	0.000	1.529	0.000	0.00
		B	0.000	0.000	1.125	0.000	0.00
		C	0.000	0.000	0.947	0.000	0.01
L44	9.00-8.75	A	0.000	0.000	1.529	0.000	0.00
		B	0.000	0.000	1.125	0.000	0.00
		C	0.000	0.000	0.947	0.000	0.01
L45	8.75-7.00	A	0.000	0.000	10.702	0.000	0.03
		B	0.000	0.000	7.877	0.000	0.01
		C	0.000	0.000	6.628	0.000	0.05
L46	7.00-6.75	A	0.000	0.000	1.529	0.000	0.00
		B	0.000	0.000	1.125	0.000	0.00
		C	0.000	0.000	0.947	0.000	0.01
L47	6.75-5.00	A	0.000	0.000	10.702	0.000	0.03
		B	0.000	0.000	7.877	0.000	0.01
		C	0.000	0.000	6.628	0.000	0.05
L48	5.00-4.75	A	0.000	0.000	1.529	0.000	0.00
		B	0.000	0.000	1.125	0.000	0.00
		C	0.000	0.000	0.947	0.000	0.01
L49	4.75-3.00	A	0.000	0.000	10.702	0.000	0.03
		B	0.000	0.000	7.877	0.000	0.01
		C	0.000	0.000	6.628	0.000	0.05
L50	3.00-2.75	A	0.000	0.000	1.529	0.000	0.00
		B	0.000	0.000	1.125	0.000	0.00
		C	0.000	0.000	0.947	0.000	0.01
L51	2.75-2.25	A	0.000	0.000	3.058	0.000	0.01
		B	0.000	0.000	2.251	0.000	0.00
		C	0.000	0.000	1.894	0.000	0.01
L52	2.25-2.00	A	0.000	0.000	1.529	0.000	0.00
		B	0.000	0.000	1.125	0.000	0.00
		C	0.000	0.000	0.947	0.000	0.01
L53	2.00-0.00	A	0.000	0.000	12.231	0.000	0.03
		B	0.000	0.000	9.002	0.000	0.01
		C	0.000	0.000	7.575	0.000	0.06

**Feed Line/Linear Appurtenances Section Areas - With Ice**

Tower Section n	Tower Elevation ft	Face or Leg	Ice Thickness in	A <sub>R</sub> ft <sup>2</sup>	A <sub>F</sub> ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>	Weight K
L1	169.00-164.00	A	1.999	0.000	0.000	0.000	0.000	0.00

Tower Section	Tower Elevation	Face or Leg	Ice Thickness	$A_R$	$A_F$	$C_A A_A$	$C_A A_A$	Weight
n	ft		in	ft <sup>2</sup>	ft <sup>2</sup>	In Face ft <sup>2</sup>	Out Face ft <sup>2</sup>	K
		B		0.000	0.000	0.000	0.000	0.00
		C		0.000	0.000	0.000	0.000	0.01
L2	164.00-159.00	A	1.993	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.000	0.00
		C		0.000	0.000	0.000	0.000	0.05
L3	159.00-154.00	A	1.986	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.000	0.00
		C		0.000	0.000	0.000	0.000	0.08
L4	154.00-149.00	A	1.980	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.000	0.00
		C		0.000	0.000	0.000	0.000	0.11
L5	149.00-144.00	A	1.973	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.000	0.00
		C		0.000	0.000	0.000	0.000	0.12
L6	144.00-139.00	A	1.966	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.000	0.00
		C		0.000	0.000	0.000	0.000	0.13
L7	139.00-133.33	A	1.959	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	9.222	0.000	0.15
		C		0.000	0.000	0.000	0.000	0.14
L8	133.33-131.66	A	1.954	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	3.298	0.000	0.05
		C		0.000	0.000	0.000	0.000	0.04
L9	131.66-126.66	A	1.949	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	9.861	0.000	0.15
		C		0.000	0.000	0.000	0.000	0.13
L10	126.66-121.66	A	1.941	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	9.851	0.000	0.15
		C		0.000	0.000	3.579	0.000	0.19
L11	121.66-116.66	A	1.933	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	10.444	0.000	0.16
		C		0.000	0.000	7.630	0.000	0.27
L12	116.66-111.66	A	1.925	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	12.070	0.000	0.18
		C		0.000	0.000	7.612	0.000	0.27
L13	111.66-111.00	A	1.920	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	1.592	0.000	0.02
		C		0.000	0.000	1.003	0.000	0.04
L14	111.00-110.75	A	1.919	0.000	0.000	0.677	0.000	0.02
		B		0.000	0.000	0.603	0.000	0.01
		C		0.000	0.000	0.380	0.000	0.01
L15	110.75-105.75	A	1.914	0.000	0.000	16.316	0.000	0.34
		B		0.000	0.000	14.833	0.000	0.22
		C		0.000	0.000	10.374	0.000	0.31
L16	105.75-101.50	A	1.906	0.000	0.000	21.463	0.000	0.39
		B		0.000	0.000	20.195	0.000	0.29
		C		0.000	0.000	16.405	0.000	0.36
L17	101.50-101.25	A	1.902	0.000	0.000	1.477	0.000	0.03
		B		0.000	0.000	1.403	0.000	0.02
		C		0.000	0.000	1.180	0.000	0.02
L18	101.25-101.00	A	1.901	0.000	0.000	1.477	0.000	0.03
		B		0.000	0.000	1.403	0.000	0.02
		C		0.000	0.000	1.180	0.000	0.02
L19	101.00-100.75	A	1.901	0.000	0.000	1.477	0.000	0.03
		B		0.000	0.000	1.402	0.000	0.02
		C		0.000	0.000	1.180	0.000	0.02
L20	100.75-95.75	A	1.896	0.000	0.000	26.746	0.000	0.47
		B		0.000	0.000	25.245	0.000	0.35
		C		0.000	0.000	20.786	0.000	0.44
L21	95.75-87.83	A	1.883	0.000	0.000	39.974	0.000	0.71
		B		0.000	0.000	37.575	0.000	0.52
		C		0.000	0.000	30.513	0.000	0.65
L22	87.83-86.83	A	1.874	0.000	0.000	5.743	0.000	0.10
		B		0.000	0.000	5.440	0.000	0.07
		C		0.000	0.000	4.549	0.000	0.09



Tower Section	Tower Elevation	Face or Leg	Ice Thickness	$A_R$	$A_F$	$C_A A_A$	$C_A A_A$	Weight
n	ft		in	ft <sup>2</sup>	ft <sup>2</sup>	In Face	Out Face	K
						ft <sup>2</sup>	ft <sup>2</sup>	
L23	86.83-81.83	A	1.867	0.000	0.000	28.654	0.000	0.49
		B		0.000	0.000	27.124	0.000	0.37
		C		0.000	0.000	22.665	0.000	0.46
L24	81.83-81.50	A	1.861	0.000	0.000	2.140	0.000	0.03
		B		0.000	0.000	2.038	0.000	0.03
		C		0.000	0.000	1.744	0.000	0.03
L25	81.50-81.25	A	1.861	0.000	0.000	1.640	0.000	0.03
		B		0.000	0.000	1.563	0.000	0.02
		C		0.000	0.000	1.340	0.000	0.02
L26	81.25-76.25	A	1.854	0.000	0.000	29.192	0.000	0.47
		B		0.000	0.000	27.648	0.000	0.36
		C		0.000	0.000	23.190	0.000	0.44
L27	76.25-71.25	A	1.842	0.000	0.000	27.958	0.000	0.46
		B		0.000	0.000	26.403	0.000	0.34
		C		0.000	0.000	21.944	0.000	0.42
L28	71.25-66.25	A	1.829	0.000	0.000	27.917	0.000	0.45
		B		0.000	0.000	26.348	0.000	0.33
		C		0.000	0.000	21.890	0.000	0.42
L29	66.25-61.25	A	1.816	0.000	0.000	27.872	0.000	0.45
		B		0.000	0.000	26.290	0.000	0.33
		C		0.000	0.000	21.831	0.000	0.42
L30	61.25-56.25	A	1.801	0.000	0.000	27.824	0.000	0.45
		B		0.000	0.000	26.227	0.000	0.33
		C		0.000	0.000	21.768	0.000	0.41
L31	56.25-51.25	A	1.785	0.000	0.000	27.772	0.000	0.44
		B		0.000	0.000	26.159	0.000	0.32
		C		0.000	0.000	21.701	0.000	0.41
L32	51.25-43.33	A	1.762	0.000	0.000	52.369	0.000	0.81
		B		0.000	0.000	45.531	0.000	0.56
		C		0.000	0.000	38.468	0.000	0.70
L33	43.33-42.33	A	1.745	0.000	0.000	8.244	0.000	0.12
		B		0.000	0.000	6.565	0.000	0.08
		C		0.000	0.000	5.673	0.000	0.10
L34	42.33-37.40	A	1.732	0.000	0.000	40.491	0.000	0.56
		B		0.000	0.000	32.211	0.000	0.38
		C		0.000	0.000	27.815	0.000	0.46
L35	37.40-37.15	A	1.721	0.000	0.000	2.050	0.000	0.03
		B		0.000	0.000	1.630	0.000	0.02
		C		0.000	0.000	1.407	0.000	0.02
L36	37.15-32.15	A	1.708	0.000	0.000	40.939	0.000	0.56
		B		0.000	0.000	32.542	0.000	0.38
		C		0.000	0.000	28.083	0.000	0.46
L37	32.15-27.15	A	1.682	0.000	0.000	40.801	0.000	0.55
		B		0.000	0.000	32.403	0.000	0.37
		C		0.000	0.000	27.944	0.000	0.46
L38	27.15-22.15	A	1.651	0.000	0.000	40.656	0.000	0.54
		B		0.000	0.000	32.250	0.000	0.36
		C		0.000	0.000	27.791	0.000	0.45
L39	22.15-19.50	A	1.623	0.000	0.000	21.904	0.000	0.29
		B		0.000	0.000	17.232	0.000	0.19
		C		0.000	0.000	14.869	0.000	0.24
L40	19.50-19.25	A	1.612	0.000	0.000	2.063	0.000	0.03
		B		0.000	0.000	1.623	0.000	0.02
		C		0.000	0.000	1.400	0.000	0.02
L41	19.25-14.25	A	1.588	0.000	0.000	41.144	0.000	0.53
		B		0.000	0.000	32.329	0.000	0.35
		C		0.000	0.000	27.871	0.000	0.44
L42	14.25-9.25	A	1.533	0.000	0.000	40.853	0.000	0.52
		B		0.000	0.000	32.039	0.000	0.34
		C		0.000	0.000	27.580	0.000	0.42
L43	9.25-9.00	A	1.495	0.000	0.000	2.033	0.000	0.03
		B		0.000	0.000	1.592	0.000	0.02
		C		0.000	0.000	1.369	0.000	0.02
L44	9.00-8.75	A	1.491	0.000	0.000	2.032	0.000	0.03
		B		0.000	0.000	1.591	0.000	0.02

Tower Section	Tower Elevation ft	Face or Leg	Ice Thickness in	$A_R$ ft <sup>2</sup>	$A_F$ ft <sup>2</sup>	$C_{AA}$ In Face ft <sup>2</sup>	$C_{AA}$ Out Face ft <sup>2</sup>	Weight K
L45	8.75-7.00	C	1.473	0.000	0.000	1.368	0.000	0.02
		A		0.000	0.000	14.188	0.000	0.17
		B		0.000	0.000	11.103	0.000	0.11
L46	7.00-6.75	C	1.453	0.000	0.000	9.543	0.000	0.14
		A		0.000	0.000	2.022	0.000	0.02
		B		0.000	0.000	1.581	0.000	0.02
L47	6.75-5.00	C	1.431	0.000	0.000	1.358	0.000	0.02
		A		0.000	0.000	14.110	0.000	0.17
		B		0.000	0.000	11.025	0.000	0.11
L48	5.00-4.75	C	1.404	0.000	0.000	9.464	0.000	0.14
		A		0.000	0.000	2.009	0.000	0.02
		B		0.000	0.000	1.568	0.000	0.02
L49	4.75-3.00	C	1.372	0.000	0.000	1.345	0.000	0.02
		A		0.000	0.000	14.003	0.000	0.16
		B		0.000	0.000	10.918	0.000	0.10
L50	3.00-2.75	C	1.332	0.000	0.000	9.357	0.000	0.13
		A		0.000	0.000	1.990	0.000	0.02
		B		0.000	0.000	1.549	0.000	0.01
L51	2.75-2.25	C	1.313	0.000	0.000	1.326	0.000	0.02
		A		0.000	0.000	3.970	0.000	0.04
		B		0.000	0.000	3.089	0.000	0.03
L52	2.25-2.00	C	1.292	0.000	0.000	2.643	0.000	0.04
		A		0.000	0.000	1.979	0.000	0.02
		B		0.000	0.000	1.539	0.000	0.01
L53	2.00-0.00	C	1.198	0.000	0.000	1.316	0.000	0.02
		A		0.000	0.000	15.638	0.000	0.17
		B		0.000	0.000	12.112	0.000	0.10
		C		0.000	0.000	10.329	0.000	0.14

### Feed Line Center of Pressure

Section	Elevation ft	$CP_x$ in	$CP_z$ in	$CP_x$ Ice in	$CP_z$ Ice in
L1	169.00-164.00	0.0000	0.0000	0.0000	0.0000
L2	164.00-159.00	0.0000	0.0000	0.0000	0.0000
L3	159.00-154.00	0.0000	0.0000	0.0000	0.0000
L4	154.00-149.00	0.0000	0.0000	0.0000	0.0000
L5	149.00-144.00	0.0000	0.0000	0.0000	0.0000
L6	144.00-139.00	0.0000	0.0000	0.0000	0.0000
L7	139.00-133.33	5.0214	0.2252	4.0089	0.1798
L8	133.33-131.66	5.5893	0.2507	4.4320	0.1988
L9	131.66-126.66	5.6496	0.2534	4.4937	0.2015
L10	126.66-121.66	6.1560	0.8966	4.9825	0.9786
L11	121.66-116.66	6.6811	1.5285	5.5075	1.6584
L12	116.66-111.66	6.8714	1.5922	5.8924	1.7966
L13	111.66-111.00	6.9369	1.6072	5.9682	1.8190
L14	111.00-110.75	-0.2706	-1.2426	1.0272	-0.3867
L15	110.75-105.75	-0.2169	-1.0255	0.9176	-0.3416
L16	105.75-101.50	-0.1407	-0.7004	0.6800	-0.2487
L17	101.50-101.25	-0.1210	-0.6175	0.6084	-0.2207
L18	101.25-101.00	-0.1208	-0.6181	0.6094	-0.2209
L19	101.00-100.75	-0.1205	-0.6184	0.6104	-0.2211
L20	100.75-95.75	-0.1318	-0.6966	0.6732	-0.2417
L21	95.75-87.83	-0.1337	-0.7594	0.7338	-0.2587
L22	87.83-86.83	-0.1156	-0.6653	0.6675	-0.2339
L23	86.83-81.83	-0.1129	-0.6719	0.6768	-0.2383
L24	81.83-81.50	-0.0939	-0.5762	0.6211	-0.2176
L25	81.50-81.25	-0.0922	-0.5676	0.6156	-0.2155
L26	81.25-76.25	-0.1015	-0.6438	0.6875	-0.2396
L27	76.25-71.25	-0.1014	-0.6816	0.7302	-0.2526
L28	71.25-66.25	-0.0971	-0.6920	0.7487	-0.2578
L29	66.25-61.25	-0.0929	-0.7023	0.7665	-0.2632

Section	Elevation ft	CP <sub>x</sub> in	CP <sub>z</sub> in	CP <sub>x</sub> Ice in	CP <sub>z</sub> Ice in
L30	61.25-56.25	-0.0887	-0.7124	0.7835	-0.2689
L31	56.25-51.25	-0.0845	-0.7224	0.7996	-0.2751
L32	51.25-43.33	0.4788	-0.3408	1.2247	0.0198
L33	43.33-42.33	1.1062	0.1028	1.7097	0.3825
L34	42.33-37.40	1.1216	0.1057	1.7241	0.3833
L35	37.40-37.15	1.1350	0.1082	1.7411	0.3867
L36	37.15-32.15	1.1485	0.1107	1.7578	0.3898
L37	32.15-27.15	1.1739	0.1155	1.7884	0.3951
L38	27.15-22.15	1.2008	0.1214	1.8177	0.3999
L39	22.15-19.50	1.3001	0.1814	1.8854	0.4376
L40	19.50-19.25	1.3078	0.1830	1.8928	0.4384
L41	19.25-14.25	1.3215	0.1860	1.9051	0.4392
L42	14.25-9.25	1.3475	0.1915	1.9237	0.4382
L43	9.25-9.00	1.3611	0.1944	1.9296	0.4354
L44	9.00-8.75	1.3624	0.1947	1.9299	0.4350
L45	8.75-7.00	1.3675	0.1958	1.9308	0.4332
L46	7.00-6.75	1.3726	0.1969	1.9307	0.4309
L47	6.75-5.00	1.3777	0.1980	1.9295	0.4278
L48	5.00-4.75	1.3834	0.1992	1.9272	0.4241
L49	4.75-3.00	1.3885	0.2003	1.9221	0.4188
L50	3.00-2.75	1.3936	0.2014	1.9134	0.4115
L51	2.75-2.25	1.3955	0.2018	1.9087	0.4080
L52	2.25-2.00	1.3971	0.2021	1.9026	0.4037
L53	2.00-0.00	1.4028	0.2033	1.8718	0.3835

Note: For pole sections, center of pressure calculations do not consider feed line shielding.

### Shielding Factor Ka

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L7	54	LDF7-50A(1-5/8)	133.33 - 138.00	1.0000	1.0000
L8	54	LDF7-50A(1-5/8)	131.66 - 133.33	1.0000	1.0000
L9	54	LDF7-50A(1-5/8)	126.66 - 131.66	1.0000	1.0000
L10	54	LDF7-50A(1-5/8)	121.66 - 126.66	1.0000	1.0000
L10	59	LDF4-50A(1/2)	121.66 - 124.00	1.0000	1.0000
L10	60	2" (Nominal) Conduit	121.66 - 124.00	1.0000	1.0000
L11	54	LDF7-50A(1-5/8)	116.66 - 121.66	1.0000	1.0000
L11	59	LDF4-50A(1/2)	116.66 - 121.66	1.0000	1.0000
L11	60	2" (Nominal) Conduit	116.66 - 121.66	1.0000	1.0000
L11	62	EC4-50(1/2)	116.66 - 118.00	1.0000	1.0000
L12	54	LDF7-50A(1-5/8)	111.66 - 116.66	1.0000	1.0000
L12	59	LDF4-50A(1/2)	111.66 - 116.66	1.0000	1.0000
L12	60	2" (Nominal) Conduit	111.66 - 116.66	1.0000	1.0000
L12	62	EC4-50(1/2)	111.66 - 116.66	1.0000	1.0000
L13	54	LDF7-50A(1-5/8)	111.00 - 111.66	1.0000	1.0000
L13	59	LDF4-50A(1/2)	111.00 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L13	60	2" (Nominal) Conduit	111.66 111.00 -	1.0000	1.0000
L13	62	EC4-50(1/2)	111.66 111.00 -	1.0000	1.0000
L14	54	LDF7-50A(1-5/8)	111.66 110.75 -	1.0000	1.0000
L14	59	LDF4-50A(1/2)	111.00 110.75 -	1.0000	1.0000
L14	60	2" (Nominal) Conduit	111.00 110.75 -	1.0000	1.0000
L14	62	EC4-50(1/2)	111.00 110.75 -	1.0000	1.0000
L14	67	LDF7-50A(1-5/8)	111.00 110.75 -	1.0000	1.0000
L15	36	CCI-060100 Reinforcement	108.25 105.75 -	1.0000	1.0000
L15	37	CCI-060100 Reinforcement	108.25 105.75 -	1.0000	1.0000
L15	38	CCI-060100 Reinforcement	108.25 105.75 -	1.0000	1.0000
L15	54	LDF7-50A(1-5/8)	108.25 105.75 -	1.0000	1.0000
L15	59	LDF4-50A(1/2)	110.75 105.75 -	1.0000	1.0000
L15	60	2" (Nominal) Conduit	110.75 105.75 -	1.0000	1.0000
L15	62	EC4-50(1/2)	110.75 105.75 -	1.0000	1.0000
L15	67	LDF7-50A(1-5/8)	110.75 105.75 -	1.0000	1.0000
L16	29	CCI-040125 Reinforcement	104.00 101.50 -	1.0000	1.0000
L16	30	CCI-040125 Reinforcement	104.00 101.50 -	1.0000	1.0000
L16	31	CCI-040125 Reinforcement	104.00 101.50 -	1.0000	1.0000
L16	32	CCI-040125 Reinforcement	104.00 101.50 -	1.0000	1.0000
L16	33	CCI-040125 Reinforcement	104.00 101.50 -	1.0000	1.0000
L16	34	CCI-040125 Reinforcement	104.00 101.50 -	1.0000	1.0000
L16	36	CCI-060100 Reinforcement	105.75 101.50 -	1.0000	1.0000
L16	37	CCI-060100 Reinforcement	105.75 101.50 -	1.0000	1.0000
L16	38	CCI-060100 Reinforcement	105.75 101.50 -	1.0000	1.0000
L16	54	LDF7-50A(1-5/8)	105.75 101.50 -	1.0000	1.0000
L16	59	LDF4-50A(1/2)	105.75 101.50 -	1.0000	1.0000
L16	60	2" (Nominal) Conduit	105.75 101.50 -	1.0000	1.0000
L16	62	EC4-50(1/2)	105.75 101.50 -	1.0000	1.0000
L16	67	LDF7-50A(1-5/8)	105.75 101.50 -	1.0000	1.0000
L17	29	CCI-040125 Reinforcement	101.50 101.25 -	1.0000	1.0000
L17	30	CCI-040125 Reinforcement	101.50 101.25 -	1.0000	1.0000
L17	31	CCI-040125 Reinforcement	101.50 101.25 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L17	32	CCI-040125 Reinforcement	101.25 - 101.50	1.0000	1.0000
L17	33	CCI-040125 Reinforcement	101.25 - 101.50	1.0000	1.0000
L17	34	CCI-040125 Reinforcement	101.25 - 101.50	1.0000	1.0000
L17	36	CCI-060100 Reinforcement	101.25 - 101.50	1.0000	1.0000
L17	37	CCI-060100 Reinforcement	101.25 - 101.50	1.0000	1.0000
L17	38	CCI-060100 Reinforcement	101.25 - 101.50	1.0000	1.0000
L17	54	LDF7-50A(1-5/8)	101.25 - 101.50	1.0000	1.0000
L17	59	LDF4-50A(1/2)	101.25 - 101.50	1.0000	1.0000
L17	60	2" (Nominal) Conduit	101.25 - 101.50	1.0000	1.0000
L17	62	EC4-50(1/2)	101.25 - 101.50	1.0000	1.0000
L17	67	LDF7-50A(1-5/8)	101.25 - 101.50	1.0000	1.0000
L18	29	CCI-040125 Reinforcement	101.00 - 101.25	1.0000	1.0000
L18	30	CCI-040125 Reinforcement	101.00 - 101.25	1.0000	1.0000
L18	31	CCI-040125 Reinforcement	101.00 - 101.25	1.0000	1.0000
L18	32	CCI-040125 Reinforcement	101.00 - 101.25	1.0000	1.0000
L18	33	CCI-040125 Reinforcement	101.00 - 101.25	1.0000	1.0000
L18	34	CCI-040125 Reinforcement	101.00 - 101.25	1.0000	1.0000
L18	36	CCI-060100 Reinforcement	101.00 - 101.25	1.0000	1.0000
L18	37	CCI-060100 Reinforcement	101.00 - 101.25	1.0000	1.0000
L18	38	CCI-060100 Reinforcement	101.00 - 101.25	1.0000	1.0000
L18	54	LDF7-50A(1-5/8)	101.00 - 101.25	1.0000	1.0000
L18	59	LDF4-50A(1/2)	101.00 - 101.25	1.0000	1.0000
L18	60	2" (Nominal) Conduit	101.00 - 101.25	1.0000	1.0000
L18	62	EC4-50(1/2)	101.00 - 101.25	1.0000	1.0000
L18	67	LDF7-50A(1-5/8)	101.00 - 101.25	1.0000	1.0000
L19	29	CCI-040125 Reinforcement	100.75 - 101.00	1.0000	1.0000
L19	30	CCI-040125 Reinforcement	100.75 - 101.00	1.0000	1.0000
L19	31	CCI-040125 Reinforcement	100.75 - 101.00	1.0000	1.0000
L19	32	CCI-040125 Reinforcement	100.75 - 101.00	1.0000	1.0000
L19	33	CCI-040125 Reinforcement	100.75 - 101.00	1.0000	1.0000
L19	34	CCI-040125 Reinforcement	100.75 - 101.00	1.0000	1.0000
L19	36	CCI-060100 Reinforcement	100.75 - 101.00	1.0000	1.0000
L19	37	CCI-060100 Reinforcement	100.75 - 101.00	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L19	38	Reinforcement CCI-060100	101.00 100.75 -	1.0000	1.0000
L19	54	Reinforcement LDF7-50A(1-5/8)	101.00 100.75 -	1.0000	1.0000
L19	59	LDF4-50A(1/2)	101.00 100.75 -	1.0000	1.0000
L19	60	2" (Nominal) Conduit	101.00 100.75 -	1.0000	1.0000
L19	62	EC4-50(1/2)	101.00 100.75 -	1.0000	1.0000
L19	67	LDF7-50A(1-5/8)	101.00 100.75 -	1.0000	1.0000
L20	29	CCI-040125 Reinforcement	95.75 - 100.75	1.0000	1.0000
L20	30	CCI-040125 Reinforcement	95.75 - 100.75	1.0000	1.0000
L20	31	CCI-040125 Reinforcement	95.75 - 100.75	1.0000	1.0000
L20	32	CCI-040125 Reinforcement	95.75 - 100.75	1.0000	1.0000
L20	33	CCI-040125 Reinforcement	95.75 - 100.75	1.0000	1.0000
L20	34	CCI-040125 Reinforcement	95.75 - 100.75	1.0000	1.0000
L20	36	CCI-060100 Reinforcement	98.25 - 100.75	1.0000	1.0000
L20	37	CCI-060100 Reinforcement	98.25 - 100.75	1.0000	1.0000
L20	38	CCI-060100 Reinforcement	98.25 - 100.75	1.0000	1.0000
L20	54	LDF7-50A(1-5/8)	95.75 - 100.75	1.0000	1.0000
L20	59	LDF4-50A(1/2)	95.75 - 100.75	1.0000	1.0000
L20	60	2" (Nominal) Conduit	95.75 - 100.75	1.0000	1.0000
L20	62	EC4-50(1/2)	95.75 - 100.75	1.0000	1.0000
L20	67	LDF7-50A(1-5/8)	95.75 - 100.75	1.0000	1.0000
L21	13	CCI-045100 Reinforcement	87.83 - 90.00	1.0000	1.0000
L21	14	CCI-045100 Reinforcement	87.83 - 90.00	1.0000	1.0000
L21	15	CCI-045100 Reinforcement	87.83 - 90.00	1.0000	1.0000
L21	29	CCI-040125 Reinforcement	87.83 - 95.75	1.0000	1.0000
L21	30	CCI-040125 Reinforcement	87.83 - 95.75	1.0000	1.0000
L21	31	CCI-040125 Reinforcement	87.83 - 95.75	1.0000	1.0000
L21	32	CCI-040125 Reinforcement	87.83 - 95.75	1.0000	1.0000
L21	33	CCI-040125 Reinforcement	87.83 - 95.75	1.0000	1.0000
L21	34	CCI-040125 Reinforcement	87.83 - 95.75	1.0000	1.0000
L21	54	LDF7-50A(1-5/8)	87.83 - 95.75	1.0000	1.0000
L21	59	LDF4-50A(1/2)	87.83 - 95.75	1.0000	1.0000
L21	60	2" (Nominal) Conduit	87.83 - 95.75	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L21	62	EC4-50(1/2)	87.83 - 95.75	1.0000	1.0000
L21	67	LDF7-50A(1-5/8)	87.83 - 95.75	1.0000	1.0000
L22	13	CCI-045100 Reinforcement	86.83 - 87.83	1.0000	1.0000
L22	14	CCI-045100 Reinforcement	86.83 - 87.83	1.0000	1.0000
L22	15	CCI-045100 Reinforcement	86.83 - 87.83	1.0000	1.0000
L22	29	CCI-040125 Reinforcement	86.83 - 87.83	1.0000	1.0000
L22	30	CCI-040125 Reinforcement	86.83 - 87.83	1.0000	1.0000
L22	31	CCI-040125 Reinforcement	86.83 - 87.83	1.0000	1.0000
L22	32	CCI-040125 Reinforcement	86.83 - 87.83	1.0000	1.0000
L22	33	CCI-040125 Reinforcement	86.83 - 87.83	1.0000	1.0000
L22	34	CCI-040125 Reinforcement	86.83 - 87.83	1.0000	1.0000
L22	54	LDF7-50A(1-5/8)	86.83 - 87.83	1.0000	1.0000
L22	59	LDF4-50A(1/2)	86.83 - 87.83	1.0000	1.0000
L22	60	2" (Nominal) Conduit	86.83 - 87.83	1.0000	1.0000
L22	62	EC4-50(1/2)	86.83 - 87.83	1.0000	1.0000
L22	67	LDF7-50A(1-5/8)	86.83 - 87.83	1.0000	1.0000
L23	13	CCI-045100 Reinforcement	81.83 - 86.83	1.0000	1.0000
L23	14	CCI-045100 Reinforcement	81.83 - 86.83	1.0000	1.0000
L23	15	CCI-045100 Reinforcement	81.83 - 86.83	1.0000	1.0000
L23	29	CCI-040125 Reinforcement	81.83 - 86.83	1.0000	1.0000
L23	30	CCI-040125 Reinforcement	81.83 - 86.83	1.0000	1.0000
L23	31	CCI-040125 Reinforcement	81.83 - 86.83	1.0000	1.0000
L23	32	CCI-040125 Reinforcement	81.83 - 86.83	1.0000	1.0000
L23	33	CCI-040125 Reinforcement	81.83 - 86.83	1.0000	1.0000
L23	34	CCI-040125 Reinforcement	81.83 - 86.83	1.0000	1.0000
L23	54	LDF7-50A(1-5/8)	81.83 - 86.83	1.0000	1.0000
L23	59	LDF4-50A(1/2)	81.83 - 86.83	1.0000	1.0000
L23	60	2" (Nominal) Conduit	81.83 - 86.83	1.0000	1.0000
L23	62	EC4-50(1/2)	81.83 - 86.83	1.0000	1.0000
L23	67	LDF7-50A(1-5/8)	81.83 - 86.83	1.0000	1.0000
L24	13	CCI-045100 Reinforcement	81.50 - 81.83	1.0000	1.0000
L24	14	CCI-045100 Reinforcement	81.50 - 81.83	1.0000	1.0000
L24	15	CCI-045100 Reinforcement	81.50 - 81.83	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
		Reinforcement	81.83		
L24	18	CCI-065125	81.50 -	1.0000	1.0000
		Reinforcement	81.80		
L24	20	CCI-065125	81.50 -	1.0000	1.0000
		Reinforcement	81.80		
L24	22	CCI-065125	81.50 -	1.0000	1.0000
		Reinforcement	81.80		
L24	24	CCI-065125	81.50 -	1.0000	1.0000
		Reinforcement	81.80		
L24	26	CCI-065125	81.50 -	1.0000	1.0000
		Reinforcement	81.80		
L24	28	CCI-065125	81.50 -	1.0000	1.0000
		Reinforcement	81.80		
L24	29	CCI-040125	81.80 -	1.0000	1.0000
		Reinforcement	81.83		
L24	30	CCI-040125	81.80 -	1.0000	1.0000
		Reinforcement	81.83		
L24	31	CCI-040125	81.80 -	1.0000	1.0000
		Reinforcement	81.83		
L24	32	CCI-040125	81.80 -	1.0000	1.0000
		Reinforcement	81.83		
L24	33	CCI-040125	81.80 -	1.0000	1.0000
		Reinforcement	81.83		
L24	34	CCI-040125	81.80 -	1.0000	1.0000
		Reinforcement	81.83		
L24	54	LDF7-50A(1-5/8)	81.50 -	1.0000	1.0000
			81.83		
L24	59	LDF4-50A(1/2)	81.50 -	1.0000	1.0000
			81.83		
L24	60	2" (Nominal) Conduit	81.50 -	1.0000	1.0000
			81.83		
L24	62	EC4-50(1/2)	81.50 -	1.0000	1.0000
			81.83		
L24	67	LDF7-50A(1-5/8)	81.50 -	1.0000	1.0000
			81.83		
L25	13	CCI-045100	81.25 -	1.0000	1.0000
		Reinforcement	81.50		
L25	14	CCI-045100	81.25 -	1.0000	1.0000
		Reinforcement	81.50		
L25	15	CCI-045100	81.25 -	1.0000	1.0000
		Reinforcement	81.50		
L25	18	CCI-065125	81.25 -	1.0000	1.0000
		Reinforcement	81.50		
L25	20	CCI-065125	81.25 -	1.0000	1.0000
		Reinforcement	81.50		
L25	22	CCI-065125	81.25 -	1.0000	1.0000
		Reinforcement	81.50		
L25	24	CCI-065125	81.25 -	1.0000	1.0000
		Reinforcement	81.50		
L25	26	CCI-065125	81.25 -	1.0000	1.0000
		Reinforcement	81.50		
L25	28	CCI-065125	81.25 -	1.0000	1.0000
		Reinforcement	81.50		
L25	54	LDF7-50A(1-5/8)	81.25 -	1.0000	1.0000
			81.50		
L25	59	LDF4-50A(1/2)	81.25 -	1.0000	1.0000
			81.50		
L25	60	2" (Nominal) Conduit	81.25 -	1.0000	1.0000
			81.50		
L25	62	EC4-50(1/2)	81.25 -	1.0000	1.0000
			81.50		
L25	67	LDF7-50A(1-5/8)	81.25 -	1.0000	1.0000
			81.50		
L26	13	CCI-045100	80.00 -	1.0000	1.0000
		Reinforcement	81.25		



Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L26	14	CCI-045100 Reinforcement	80.00 - 81.25	1.0000	1.0000
L26	15	CCI-045100 Reinforcement	80.00 - 81.25	1.0000	1.0000
L26	18	CCI-065125 Reinforcement	76.25 - 81.25	1.0000	1.0000
L26	20	CCI-065125 Reinforcement	76.25 - 81.25	1.0000	1.0000
L26	22	CCI-065125 Reinforcement	76.25 - 81.25	1.0000	1.0000
L26	24	CCI-065125 Reinforcement	76.25 - 81.25	1.0000	1.0000
L26	26	CCI-065125 Reinforcement	76.25 - 81.25	1.0000	1.0000
L26	28	CCI-065125 Reinforcement	76.25 - 81.25	1.0000	1.0000
L26	54	LDF7-50A(1-5/8)	76.25 - 81.25	1.0000	1.0000
L26	59	LDF4-50A(1/2)	76.25 - 81.25	1.0000	1.0000
L26	60	2" (Nominal) Conduit	76.25 - 81.25	1.0000	1.0000
L26	62	EC4-50(1/2)	76.25 - 81.25	1.0000	1.0000
L26	67	LDF7-50A(1-5/8)	76.25 - 81.25	1.0000	1.0000
L27	18	CCI-065125 Reinforcement	71.25 - 76.25	1.0000	1.0000
L27	20	CCI-065125 Reinforcement	71.25 - 76.25	1.0000	1.0000
L27	22	CCI-065125 Reinforcement	71.25 - 76.25	1.0000	1.0000
L27	24	CCI-065125 Reinforcement	71.25 - 76.25	1.0000	1.0000
L27	26	CCI-065125 Reinforcement	71.25 - 76.25	1.0000	1.0000
L27	28	CCI-065125 Reinforcement	71.25 - 76.25	1.0000	1.0000
L27	54	LDF7-50A(1-5/8)	71.25 - 76.25	1.0000	1.0000
L27	59	LDF4-50A(1/2)	71.25 - 76.25	1.0000	1.0000
L27	60	2" (Nominal) Conduit	71.25 - 76.25	1.0000	1.0000
L27	62	EC4-50(1/2)	71.25 - 76.25	1.0000	1.0000
L27	67	LDF7-50A(1-5/8)	71.25 - 76.25	1.0000	1.0000
L28	18	CCI-065125 Reinforcement	66.25 - 71.25	1.0000	1.0000
L28	20	CCI-065125 Reinforcement	66.25 - 71.25	1.0000	1.0000
L28	22	CCI-065125 Reinforcement	66.25 - 71.25	1.0000	1.0000
L28	24	CCI-065125 Reinforcement	66.25 - 71.25	1.0000	1.0000
L28	26	CCI-065125 Reinforcement	66.25 - 71.25	1.0000	1.0000
L28	28	CCI-065125 Reinforcement	66.25 - 71.25	1.0000	1.0000
L28	54	LDF7-50A(1-5/8)	66.25 - 71.25	1.0000	1.0000
L28	59	LDF4-50A(1/2)	66.25 - 71.25	1.0000	1.0000
L28	60	2" (Nominal) Conduit	66.25 - 71.25	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L28	62	EC4-50(1/2)	71.25 66.25 - 71.25	1.0000	1.0000
L28	67	LDF7-50A(1-5/8)	66.25 - 71.25	1.0000	1.0000
L29	18	CCI-065125 Reinforcement	61.25 - 66.25	1.0000	1.0000
L29	20	CCI-065125 Reinforcement	61.25 - 66.25	1.0000	1.0000
L29	22	CCI-065125 Reinforcement	61.25 - 66.25	1.0000	1.0000
L29	24	CCI-065125 Reinforcement	61.25 - 66.25	1.0000	1.0000
L29	26	CCI-065125 Reinforcement	61.25 - 66.25	1.0000	1.0000
L29	28	CCI-065125 Reinforcement	61.25 - 66.25	1.0000	1.0000
L29	54	LDF7-50A(1-5/8)	61.25 - 66.25	1.0000	1.0000
L29	59	LDF4-50A(1/2)	61.25 - 66.25	1.0000	1.0000
L29	60	2" (Nominal) Conduit	61.25 - 66.25	1.0000	1.0000
L29	62	EC4-50(1/2)	61.25 - 66.25	1.0000	1.0000
L29	67	LDF7-50A(1-5/8)	61.25 - 66.25	1.0000	1.0000
L30	18	CCI-065125 Reinforcement	56.25 - 61.25	1.0000	1.0000
L30	20	CCI-065125 Reinforcement	56.25 - 61.25	1.0000	1.0000
L30	22	CCI-065125 Reinforcement	56.25 - 61.25	1.0000	1.0000
L30	24	CCI-065125 Reinforcement	56.25 - 61.25	1.0000	1.0000
L30	26	CCI-065125 Reinforcement	56.25 - 61.25	1.0000	1.0000
L30	28	CCI-065125 Reinforcement	56.25 - 61.25	1.0000	1.0000
L30	54	LDF7-50A(1-5/8)	56.25 - 61.25	1.0000	1.0000
L30	59	LDF4-50A(1/2)	56.25 - 61.25	1.0000	1.0000
L30	60	2" (Nominal) Conduit	56.25 - 61.25	1.0000	1.0000
L30	62	EC4-50(1/2)	56.25 - 61.25	1.0000	1.0000
L30	67	LDF7-50A(1-5/8)	56.25 - 61.25	1.0000	1.0000
L31	18	CCI-065125 Reinforcement	51.25 - 56.25	1.0000	1.0000
L31	20	CCI-065125 Reinforcement	51.25 - 56.25	1.0000	1.0000
L31	22	CCI-065125 Reinforcement	51.25 - 56.25	1.0000	1.0000
L31	24	CCI-065125 Reinforcement	51.25 - 56.25	1.0000	1.0000
L31	26	CCI-065125 Reinforcement	51.25 - 56.25	1.0000	1.0000
L31	28	CCI-065125 Reinforcement	51.25 - 56.25	1.0000	1.0000
L31	54	LDF7-50A(1-5/8)	51.25 - 56.25	1.0000	1.0000
L31	59	LDF4-50A(1/2)	51.25 - 56.25	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L31	60	2" (Nominal) Conduit	51.25 - 56.25	1.0000	1.0000
L31	62	EC4-50(1/2)	51.25 - 56.25	1.0000	1.0000
L31	67	LDF7-50A(1-5/8)	51.25 - 56.25	1.0000	1.0000
L32	5	CCI-060100 Reinforcement	43.33 - 45.10	1.0000	1.0000
L32	6	CCI-060100 Reinforcement	45.10 - 47.33	1.0000	1.0000
L32	7	CCI-060100 Reinforcement	43.33 - 45.10	1.0000	1.0000
L32	8	CCI-060100 Reinforcement	45.10 - 47.33	1.0000	1.0000
L32	9	CCI-060100 Reinforcement	43.33 - 45.10	1.0000	1.0000
L32	10	CCI-060100 Reinforcement	45.10 - 47.33	1.0000	1.0000
L32	11	CCI-060100 Reinforcement	43.33 - 45.10	1.0000	1.0000
L32	12	CCI-060100 Reinforcement	45.10 - 47.33	1.0000	1.0000
L32	18	CCI-065125 Reinforcement	43.33 - 51.25	1.0000	1.0000
L32	20	CCI-065125 Reinforcement	43.33 - 51.25	1.0000	1.0000
L32	22	CCI-065125 Reinforcement	43.33 - 51.25	1.0000	1.0000
L32	24	CCI-065125 Reinforcement	43.33 - 51.25	1.0000	1.0000
L32	26	CCI-065125 Reinforcement	43.33 - 51.25	1.0000	1.0000
L32	28	CCI-065125 Reinforcement	43.33 - 51.25	1.0000	1.0000
L32	54	LDF7-50A(1-5/8)	43.33 - 51.25	1.0000	1.0000
L32	59	LDF4-50A(1/2)	43.33 - 51.25	1.0000	1.0000
L32	60	2" (Nominal) Conduit	43.33 - 51.25	1.0000	1.0000
L32	62	EC4-50(1/2)	43.33 - 51.25	1.0000	1.0000
L32	67	LDF7-50A(1-5/8)	43.33 - 51.25	1.0000	1.0000
L33	5	CCI-060100 Reinforcement	42.33 - 43.33	1.0000	1.0000
L33	7	CCI-060100 Reinforcement	42.33 - 43.33	1.0000	1.0000
L33	9	CCI-060100 Reinforcement	42.33 - 43.33	1.0000	1.0000
L33	11	CCI-060100 Reinforcement	42.33 - 43.33	1.0000	1.0000
L33	18	CCI-065125 Reinforcement	42.33 - 43.33	1.0000	1.0000
L33	20	CCI-065125 Reinforcement	42.33 - 43.33	1.0000	1.0000
L33	22	CCI-065125 Reinforcement	42.33 - 43.33	1.0000	1.0000
L33	24	CCI-065125 Reinforcement	42.33 - 43.33	1.0000	1.0000
L33	26	CCI-065125 Reinforcement	42.33 - 43.33	1.0000	1.0000
L33	28	CCI-065125 Reinforcement	42.33 - 43.33	1.0000	1.0000
L33	54	LDF7-50A(1-5/8)	42.33 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L33	59	LDF4-50A(1/2)	43.33 42.33 - 43.33	1.0000	1.0000
L33	60	2" (Nominal) Conduit	42.33 - 43.33	1.0000	1.0000
L33	62	EC4-50(1/2)	42.33 - 43.33	1.0000	1.0000
L33	67	LDF7-50A(1-5/8)	42.33 - 43.33	1.0000	1.0000
L34	5	CCI-060100 Reinforcement	37.40 - 42.33	1.0000	1.0000
L34	7	CCI-060100 Reinforcement	37.40 - 42.33	1.0000	1.0000
L34	9	CCI-060100 Reinforcement	37.40 - 42.33	1.0000	1.0000
L34	11	CCI-060100 Reinforcement	37.40 - 42.33	1.0000	1.0000
L34	18	CCI-065125 Reinforcement	37.40 - 42.33	1.0000	1.0000
L34	20	CCI-065125 Reinforcement	37.40 - 42.33	1.0000	1.0000
L34	22	CCI-065125 Reinforcement	37.40 - 42.33	1.0000	1.0000
L34	24	CCI-065125 Reinforcement	37.40 - 42.33	1.0000	1.0000
L34	26	CCI-065125 Reinforcement	37.40 - 42.33	1.0000	1.0000
L34	28	CCI-065125 Reinforcement	37.40 - 42.33	1.0000	1.0000
L34	54	LDF7-50A(1-5/8)	37.40 - 42.33	1.0000	1.0000
L34	59	LDF4-50A(1/2)	37.40 - 42.33	1.0000	1.0000
L34	60	2" (Nominal) Conduit	37.40 - 42.33	1.0000	1.0000
L34	62	EC4-50(1/2)	37.40 - 42.33	1.0000	1.0000
L34	67	LDF7-50A(1-5/8)	37.40 - 42.33	1.0000	1.0000
L35	5	CCI-060100 Reinforcement	37.15 - 37.40	1.0000	1.0000
L35	7	CCI-060100 Reinforcement	37.15 - 37.40	1.0000	1.0000
L35	9	CCI-060100 Reinforcement	37.15 - 37.40	1.0000	1.0000
L35	11	CCI-060100 Reinforcement	37.15 - 37.40	1.0000	1.0000
L35	18	CCI-065125 Reinforcement	37.15 - 37.40	1.0000	1.0000
L35	20	CCI-065125 Reinforcement	37.15 - 37.40	1.0000	1.0000
L35	22	CCI-065125 Reinforcement	37.15 - 37.40	1.0000	1.0000
L35	24	CCI-065125 Reinforcement	37.15 - 37.40	1.0000	1.0000
L35	26	CCI-065125 Reinforcement	37.15 - 37.40	1.0000	1.0000
L35	28	CCI-065125 Reinforcement	37.15 - 37.40	1.0000	1.0000
L35	54	LDF7-50A(1-5/8)	37.15 - 37.40	1.0000	1.0000
L35	59	LDF4-50A(1/2)	37.15 - 37.40	1.0000	1.0000
L35	60	2" (Nominal) Conduit	37.15 - 37.40	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L35	62	EC4-50(1/2)	37.15 - 37.40	1.0000	1.0000
L35	67	LDF7-50A(1-5/8)	37.15 - 37.40	1.0000	1.0000
L36	5	CCI-060100 Reinforcement	32.15 - 37.15	1.0000	1.0000
L36	7	CCI-060100 Reinforcement	32.15 - 37.15	1.0000	1.0000
L36	9	CCI-060100 Reinforcement	32.15 - 37.15	1.0000	1.0000
L36	11	CCI-060100 Reinforcement	32.15 - 37.15	1.0000	1.0000
L36	18	CCI-065125 Reinforcement	32.15 - 37.15	1.0000	1.0000
L36	20	CCI-065125 Reinforcement	32.15 - 37.15	1.0000	1.0000
L36	22	CCI-065125 Reinforcement	32.15 - 37.15	1.0000	1.0000
L36	24	CCI-065125 Reinforcement	32.15 - 37.15	1.0000	1.0000
L36	26	CCI-065125 Reinforcement	32.15 - 37.15	1.0000	1.0000
L36	28	CCI-065125 Reinforcement	32.15 - 37.15	1.0000	1.0000
L36	54	LDF7-50A(1-5/8)	32.15 - 37.15	1.0000	1.0000
L36	59	LDF4-50A(1/2)	32.15 - 37.15	1.0000	1.0000
L36	60	2" (Nominal) Conduit	32.15 - 37.15	1.0000	1.0000
L36	62	EC4-50(1/2)	32.15 - 37.15	1.0000	1.0000
L36	67	LDF7-50A(1-5/8)	32.15 - 37.15	1.0000	1.0000
L37	5	CCI-060100 Reinforcement	27.15 - 32.15	1.0000	1.0000
L37	7	CCI-060100 Reinforcement	27.15 - 32.15	1.0000	1.0000
L37	9	CCI-060100 Reinforcement	27.15 - 32.15	1.0000	1.0000
L37	11	CCI-060100 Reinforcement	27.15 - 32.15	1.0000	1.0000
L37	18	CCI-065125 Reinforcement	27.15 - 32.15	1.0000	1.0000
L37	20	CCI-065125 Reinforcement	27.15 - 32.15	1.0000	1.0000
L37	22	CCI-065125 Reinforcement	27.15 - 32.15	1.0000	1.0000
L37	24	CCI-065125 Reinforcement	27.15 - 32.15	1.0000	1.0000
L37	26	CCI-065125 Reinforcement	27.15 - 32.15	1.0000	1.0000
L37	28	CCI-065125 Reinforcement	27.15 - 32.15	1.0000	1.0000
L37	54	LDF7-50A(1-5/8)	27.15 - 32.15	1.0000	1.0000
L37	59	LDF4-50A(1/2)	27.15 - 32.15	1.0000	1.0000
L37	60	2" (Nominal) Conduit	27.15 - 32.15	1.0000	1.0000
L37	62	EC4-50(1/2)	27.15 - 32.15	1.0000	1.0000
L37	67	LDF7-50A(1-5/8)	27.15 - 32.15	1.0000	1.0000
L38	1	CCI-065125	22.15 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L38	2	Reinforcement CCI-065125	22.25 22.15 -	1.0000	1.0000
L38	3	Reinforcement CCI-065125	22.25 22.15 -	1.0000	1.0000
L38	4	Reinforcement CCI-065125	22.25 22.15 -	1.0000	1.0000
L38	5	Reinforcement CCI-060100	22.25 - 27.15	1.0000	1.0000
L38	7	Reinforcement CCI-060100	22.25 - 27.15	1.0000	1.0000
L38	9	Reinforcement CCI-060100	22.25 - 27.15	1.0000	1.0000
L38	11	Reinforcement CCI-060100	22.25 - 27.15	1.0000	1.0000
L38	17	Reinforcement CCI-065125	22.15 - 26.01	1.0000	1.0000
L38	18	Reinforcement CCI-065125	26.01 - 27.15	1.0000	1.0000
L38	19	Reinforcement CCI-065125	22.15 - 26.01	1.0000	1.0000
L38	20	Reinforcement CCI-065125	26.01 - 27.15	1.0000	1.0000
L38	21	Reinforcement CCI-065125	22.15 - 26.01	1.0000	1.0000
L38	22	Reinforcement CCI-065125	26.01 - 27.15	1.0000	1.0000
L38	23	Reinforcement CCI-065125	22.15 - 26.01	1.0000	1.0000
L38	24	Reinforcement CCI-065125	26.01 - 27.15	1.0000	1.0000
L38	25	Reinforcement CCI-065125	22.15 - 26.01	1.0000	1.0000
L38	26	Reinforcement CCI-065125	26.01 - 27.15	1.0000	1.0000
L38	27	Reinforcement CCI-065125	22.15 - 26.01	1.0000	1.0000
L38	28	Reinforcement CCI-065125	26.01 - 27.15	1.0000	1.0000
L38	54	LDF7-50A(1-5/8)	22.15 - 27.15	1.0000	1.0000
L38	59	LDF4-50A(1/2)	22.15 - 27.15	1.0000	1.0000
L38	60	2" (Nominal) Conduit	22.15 - 27.15	1.0000	1.0000
L38	62	EC4-50(1/2)	22.15 - 27.15	1.0000	1.0000
L38	67	LDF7-50A(1-5/8)	22.15 - 27.15	1.0000	1.0000
L39	1	Reinforcement CCI-065125	19.50 - 22.15	1.0000	1.0000
L39	2	Reinforcement CCI-065125	19.50 - 22.15	1.0000	1.0000
L39	3	Reinforcement CCI-065125	19.50 - 22.15	1.0000	1.0000
L39	4	Reinforcement CCI-065125	19.50 - 22.15	1.0000	1.0000
L39	17	Reinforcement CCI-065125	19.50 - 22.15	1.0000	1.0000
L39	19	Reinforcement CCI-065125	19.50 - 22.15	1.0000	1.0000
L39	21	Reinforcement CCI-065125	19.50 - 22.15	1.0000	1.0000
L39	23	Reinforcement CCI-065125	19.50 - 22.15	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L39	25	CCI-065125 Reinforcement	19.50 - 22.15	1.0000	1.0000
L39	27	CCI-065125 Reinforcement	19.50 - 22.15	1.0000	1.0000
L39	54	LDF7-50A(1-5/8)	19.50 - 22.15	1.0000	1.0000
L39	59	LDF4-50A(1/2)	19.50 - 22.15	1.0000	1.0000
L39	60	2" (Nominal) Conduit	19.50 - 22.15	1.0000	1.0000
L39	62	EC4-50(1/2)	19.50 - 22.15	1.0000	1.0000
L39	67	LDF7-50A(1-5/8)	19.50 - 22.15	1.0000	1.0000
L40	1	CCI-065125 Reinforcement	19.25 - 19.50	1.0000	1.0000
L40	2	CCI-065125 Reinforcement	19.25 - 19.50	1.0000	1.0000
L40	3	CCI-065125 Reinforcement	19.25 - 19.50	1.0000	1.0000
L40	4	CCI-065125 Reinforcement	19.25 - 19.50	1.0000	1.0000
L40	17	CCI-065125 Reinforcement	19.25 - 19.50	1.0000	1.0000
L40	19	CCI-065125 Reinforcement	19.25 - 19.50	1.0000	1.0000
L40	21	CCI-065125 Reinforcement	19.25 - 19.50	1.0000	1.0000
L40	23	CCI-065125 Reinforcement	19.25 - 19.50	1.0000	1.0000
L40	25	CCI-065125 Reinforcement	19.25 - 19.50	1.0000	1.0000
L40	27	CCI-065125 Reinforcement	19.25 - 19.50	1.0000	1.0000
L40	54	LDF7-50A(1-5/8)	19.25 - 19.50	1.0000	1.0000
L40	59	LDF4-50A(1/2)	19.25 - 19.50	1.0000	1.0000
L40	60	2" (Nominal) Conduit	19.25 - 19.50	1.0000	1.0000
L40	62	EC4-50(1/2)	19.25 - 19.50	1.0000	1.0000
L40	67	LDF7-50A(1-5/8)	19.25 - 19.50	1.0000	1.0000
L41	1	CCI-065125 Reinforcement	14.25 - 19.25	1.0000	1.0000
L41	2	CCI-065125 Reinforcement	14.25 - 19.25	1.0000	1.0000
L41	3	CCI-065125 Reinforcement	14.25 - 19.25	1.0000	1.0000
L41	4	CCI-065125 Reinforcement	14.25 - 19.25	1.0000	1.0000
L41	17	CCI-065125 Reinforcement	14.25 - 19.25	1.0000	1.0000
L41	19	CCI-065125 Reinforcement	14.25 - 19.25	1.0000	1.0000
L41	21	CCI-065125 Reinforcement	14.25 - 19.25	1.0000	1.0000
L41	23	CCI-065125 Reinforcement	14.25 - 19.25	1.0000	1.0000
L41	25	CCI-065125 Reinforcement	14.25 - 19.25	1.0000	1.0000
L41	27	CCI-065125 Reinforcement	14.25 - 19.25	1.0000	1.0000
L41	54	LDF7-50A(1-5/8)	14.25 - 19.25	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L41	59	LDF4-50A(1/2)	19.25 14.25 - 19.25	1.0000	1.0000
L41	60	2" (Nominal) Conduit	14.25 - 19.25	1.0000	1.0000
L41	62	EC4-50(1/2)	14.25 - 19.25	1.0000	1.0000
L41	67	LDF7-50A(1-5/8)	14.25 - 19.25	1.0000	1.0000
L42	1	CCI-065125 Reinforcement	9.25 - 14.25	1.0000	1.0000
L42	2	CCI-065125 Reinforcement	9.25 - 14.25	1.0000	1.0000
L42	3	CCI-065125 Reinforcement	9.25 - 14.25	1.0000	1.0000
L42	4	CCI-065125 Reinforcement	9.25 - 14.25	1.0000	1.0000
L42	17	CCI-065125 Reinforcement	9.25 - 14.25	1.0000	1.0000
L42	19	CCI-065125 Reinforcement	9.25 - 14.25	1.0000	1.0000
L42	21	CCI-065125 Reinforcement	9.25 - 14.25	1.0000	1.0000
L42	23	CCI-065125 Reinforcement	9.25 - 14.25	1.0000	1.0000
L42	25	CCI-065125 Reinforcement	9.25 - 14.25	1.0000	1.0000
L42	27	CCI-065125 Reinforcement	9.25 - 14.25	1.0000	1.0000
L42	54	LDF7-50A(1-5/8)	9.25 - 14.25	1.0000	1.0000
L42	59	LDF4-50A(1/2)	9.25 - 14.25	1.0000	1.0000
L42	60	2" (Nominal) Conduit	9.25 - 14.25	1.0000	1.0000
L42	62	EC4-50(1/2)	9.25 - 14.25	1.0000	1.0000
L42	67	LDF7-50A(1-5/8)	9.25 - 14.25	1.0000	1.0000
L43	1	CCI-065125 Reinforcement	9.00 - 9.25	1.0000	1.0000
L43	2	CCI-065125 Reinforcement	9.00 - 9.25	1.0000	1.0000
L43	3	CCI-065125 Reinforcement	9.00 - 9.25	1.0000	1.0000
L43	4	CCI-065125 Reinforcement	9.00 - 9.25	1.0000	1.0000
L43	17	CCI-065125 Reinforcement	9.00 - 9.25	1.0000	1.0000
L43	19	CCI-065125 Reinforcement	9.00 - 9.25	1.0000	1.0000
L43	21	CCI-065125 Reinforcement	9.00 - 9.25	1.0000	1.0000
L43	23	CCI-065125 Reinforcement	9.00 - 9.25	1.0000	1.0000
L43	25	CCI-065125 Reinforcement	9.00 - 9.25	1.0000	1.0000
L43	27	CCI-065125 Reinforcement	9.00 - 9.25	1.0000	1.0000
L43	54	LDF7-50A(1-5/8)	9.00 - 9.25	1.0000	1.0000
L43	59	LDF4-50A(1/2)	9.00 - 9.25	1.0000	1.0000
L43	60	2" (Nominal) Conduit	9.00 - 9.25	1.0000	1.0000
L43	62	EC4-50(1/2)	9.00 - 9.25	1.0000	1.0000
L43	67	LDF7-50A(1-5/8)	9.00 - 9.25	1.0000	1.0000
L44	1	CCI-065125 Reinforcement	8.75 - 9.00	1.0000	1.0000
L44	2	CCI-065125 Reinforcement	8.75 - 9.00	1.0000	1.0000
L44	3	CCI-065125 Reinforcement	8.75 - 9.00	1.0000	1.0000



Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L44	4	CCI-065125 Reinforcement	8.75 - 9.00	1.0000	1.0000
L44	17	CCI-065125 Reinforcement	8.75 - 9.00	1.0000	1.0000
L44	19	CCI-065125 Reinforcement	8.75 - 9.00	1.0000	1.0000
L44	21	CCI-065125 Reinforcement	8.75 - 9.00	1.0000	1.0000
L44	23	CCI-065125 Reinforcement	8.75 - 9.00	1.0000	1.0000
L44	25	CCI-065125 Reinforcement	8.75 - 9.00	1.0000	1.0000
L44	27	CCI-065125 Reinforcement	8.75 - 9.00	1.0000	1.0000
L44	54	LDF7-50A(1-5/8)	8.75 - 9.00	1.0000	1.0000
L44	59	LDF4-50A(1/2)	8.75 - 9.00	1.0000	1.0000
L44	60	2" (Nominal) Conduit	8.75 - 9.00	1.0000	1.0000
L44	62	EC4-50(1/2)	8.75 - 9.00	1.0000	1.0000
L44	67	LDF7-50A(1-5/8)	8.75 - 9.00	1.0000	1.0000
L45	1	CCI-065125 Reinforcement	7.00 - 8.75	1.0000	1.0000
L45	2	CCI-065125 Reinforcement	7.00 - 8.75	1.0000	1.0000
L45	3	CCI-065125 Reinforcement	7.00 - 8.75	1.0000	1.0000
L45	4	CCI-065125 Reinforcement	7.00 - 8.75	1.0000	1.0000
L45	17	CCI-065125 Reinforcement	7.00 - 8.75	1.0000	1.0000
L45	19	CCI-065125 Reinforcement	7.00 - 8.75	1.0000	1.0000
L45	21	CCI-065125 Reinforcement	7.00 - 8.75	1.0000	1.0000
L45	23	CCI-065125 Reinforcement	7.00 - 8.75	1.0000	1.0000
L45	25	CCI-065125 Reinforcement	7.00 - 8.75	1.0000	1.0000
L45	27	CCI-065125 Reinforcement	7.00 - 8.75	1.0000	1.0000
L45	54	LDF7-50A(1-5/8)	7.00 - 8.75	1.0000	1.0000
L45	59	LDF4-50A(1/2)	7.00 - 8.75	1.0000	1.0000
L45	60	2" (Nominal) Conduit	7.00 - 8.75	1.0000	1.0000
L45	62	EC4-50(1/2)	7.00 - 8.75	1.0000	1.0000
L45	67	LDF7-50A(1-5/8)	7.00 - 8.75	1.0000	1.0000
L46	1	CCI-065125 Reinforcement	6.75 - 7.00	1.0000	1.0000
L46	2	CCI-065125 Reinforcement	6.75 - 7.00	1.0000	1.0000
L46	3	CCI-065125 Reinforcement	6.75 - 7.00	1.0000	1.0000
L46	4	CCI-065125 Reinforcement	6.75 - 7.00	1.0000	1.0000
L46	17	CCI-065125 Reinforcement	6.75 - 7.00	1.0000	1.0000
L46	19	CCI-065125 Reinforcement	6.75 - 7.00	1.0000	1.0000
L46	21	CCI-065125 Reinforcement	6.75 - 7.00	1.0000	1.0000
L46	23	CCI-065125 Reinforcement	6.75 - 7.00	1.0000	1.0000
L46	25	CCI-065125 Reinforcement	6.75 - 7.00	1.0000	1.0000
L46	27	CCI-065125 Reinforcement	6.75 - 7.00	1.0000	1.0000
L46	54	LDF7-50A(1-5/8)	6.75 - 7.00	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L46	59	LDF4-50A(1/2)	6.75 - 7.00	1.0000	1.0000
L46	60	2" (Nominal) Conduit	6.75 - 7.00	1.0000	1.0000
L46	62	EC4-50(1/2)	6.75 - 7.00	1.0000	1.0000
L46	67	LDF7-50A(1-5/8)	6.75 - 7.00	1.0000	1.0000
L47	1	CCI-065125 Reinforcement	5.00 - 6.75	1.0000	1.0000
L47	2	CCI-065125 Reinforcement	5.00 - 6.75	1.0000	1.0000
L47	3	CCI-065125 Reinforcement	5.00 - 6.75	1.0000	1.0000
L47	4	CCI-065125 Reinforcement	5.00 - 6.75	1.0000	1.0000
L47	17	CCI-065125 Reinforcement	5.00 - 6.75	1.0000	1.0000
L47	19	CCI-065125 Reinforcement	5.00 - 6.75	1.0000	1.0000
L47	21	CCI-065125 Reinforcement	5.00 - 6.75	1.0000	1.0000
L47	23	CCI-065125 Reinforcement	5.00 - 6.75	1.0000	1.0000
L47	25	CCI-065125 Reinforcement	5.00 - 6.75	1.0000	1.0000
L47	27	CCI-065125 Reinforcement	5.00 - 6.75	1.0000	1.0000
L47	54	LDF7-50A(1-5/8)	5.00 - 6.75	1.0000	1.0000
L47	59	LDF4-50A(1/2)	5.00 - 6.75	1.0000	1.0000
L47	60	2" (Nominal) Conduit	5.00 - 6.75	1.0000	1.0000
L47	62	EC4-50(1/2)	5.00 - 6.75	1.0000	1.0000
L47	67	LDF7-50A(1-5/8)	5.00 - 6.75	1.0000	1.0000
L48	1	CCI-065125 Reinforcement	4.75 - 5.00	1.0000	1.0000
L48	2	CCI-065125 Reinforcement	4.75 - 5.00	1.0000	1.0000
L48	3	CCI-065125 Reinforcement	4.75 - 5.00	1.0000	1.0000
L48	4	CCI-065125 Reinforcement	4.75 - 5.00	1.0000	1.0000
L48	17	CCI-065125 Reinforcement	4.75 - 5.00	1.0000	1.0000
L48	19	CCI-065125 Reinforcement	4.75 - 5.00	1.0000	1.0000
L48	21	CCI-065125 Reinforcement	4.75 - 5.00	1.0000	1.0000
L48	23	CCI-065125 Reinforcement	4.75 - 5.00	1.0000	1.0000
L48	25	CCI-065125 Reinforcement	4.75 - 5.00	1.0000	1.0000
L48	27	CCI-065125 Reinforcement	4.75 - 5.00	1.0000	1.0000
L48	54	LDF7-50A(1-5/8)	4.75 - 5.00	1.0000	1.0000
L48	59	LDF4-50A(1/2)	4.75 - 5.00	1.0000	1.0000
L48	60	2" (Nominal) Conduit	4.75 - 5.00	1.0000	1.0000
L48	62	EC4-50(1/2)	4.75 - 5.00	1.0000	1.0000
L48	67	LDF7-50A(1-5/8)	4.75 - 5.00	1.0000	1.0000
L49	1	CCI-065125 Reinforcement	3.00 - 4.75	1.0000	1.0000
L49	2	CCI-065125 Reinforcement	3.00 - 4.75	1.0000	1.0000
L49	3	CCI-065125 Reinforcement	3.00 - 4.75	1.0000	1.0000
L49	4	CCI-065125 Reinforcement	3.00 - 4.75	1.0000	1.0000
L49	17	CCI-065125 Reinforcement	3.00 - 4.75	1.0000	1.0000
L49	19	CCI-065125 Reinforcement	3.00 - 4.75	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L49	21	Reinforcement CCI-065125	3.00 - 4.75	1.0000	1.0000
L49	23	Reinforcement CCI-065125	3.00 - 4.75	1.0000	1.0000
L49	25	Reinforcement CCI-065125	3.00 - 4.75	1.0000	1.0000
L49	27	Reinforcement CCI-065125	3.00 - 4.75	1.0000	1.0000
L49	54	LDF7-50A(1-5/8)	3.00 - 4.75	1.0000	1.0000
L49	59	LDF4-50A(1/2)	3.00 - 4.75	1.0000	1.0000
L49	60	2" (Nominal) Conduit	3.00 - 4.75	1.0000	1.0000
L49	62	EC4-50(1/2)	3.00 - 4.75	1.0000	1.0000
L49	67	LDF7-50A(1-5/8)	3.00 - 4.75	1.0000	1.0000
L50	1	Reinforcement CCI-065125	2.75 - 3.00	1.0000	1.0000
L50	2	Reinforcement CCI-065125	2.75 - 3.00	1.0000	1.0000
L50	3	Reinforcement CCI-065125	2.75 - 3.00	1.0000	1.0000
L50	4	Reinforcement CCI-065125	2.75 - 3.00	1.0000	1.0000
L50	17	Reinforcement CCI-065125	2.75 - 3.00	1.0000	1.0000
L50	19	Reinforcement CCI-065125	2.75 - 3.00	1.0000	1.0000
L50	21	Reinforcement CCI-065125	2.75 - 3.00	1.0000	1.0000
L50	23	Reinforcement CCI-065125	2.75 - 3.00	1.0000	1.0000
L50	25	Reinforcement CCI-065125	2.75 - 3.00	1.0000	1.0000
L50	27	Reinforcement CCI-065125	2.75 - 3.00	1.0000	1.0000
L50	54	LDF7-50A(1-5/8)	2.75 - 3.00	1.0000	1.0000
L50	59	LDF4-50A(1/2)	2.75 - 3.00	1.0000	1.0000
L50	60	2" (Nominal) Conduit	2.75 - 3.00	1.0000	1.0000
L50	62	EC4-50(1/2)	2.75 - 3.00	1.0000	1.0000
L50	67	LDF7-50A(1-5/8)	2.75 - 3.00	1.0000	1.0000
L51	1	Reinforcement CCI-065125	2.25 - 2.75	1.0000	1.0000
L51	2	Reinforcement CCI-065125	2.25 - 2.75	1.0000	1.0000
L51	3	Reinforcement CCI-065125	2.25 - 2.75	1.0000	1.0000
L51	4	Reinforcement CCI-065125	2.25 - 2.75	1.0000	1.0000
L51	17	Reinforcement CCI-065125	2.25 - 2.75	1.0000	1.0000
L51	19	Reinforcement CCI-065125	2.25 - 2.75	1.0000	1.0000
L51	21	Reinforcement CCI-065125	2.25 - 2.75	1.0000	1.0000
L51	23	Reinforcement CCI-065125	2.25 - 2.75	1.0000	1.0000
L51	25	Reinforcement CCI-065125	2.25 - 2.75	1.0000	1.0000
L51	27	Reinforcement CCI-065125	2.25 - 2.75	1.0000	1.0000
L51	54	LDF7-50A(1-5/8)	2.25 - 2.75	1.0000	1.0000
L51	59	LDF4-50A(1/2)	2.25 - 2.75	1.0000	1.0000
L51	60	2" (Nominal) Conduit	2.25 - 2.75	1.0000	1.0000
L51	62	EC4-50(1/2)	2.25 - 2.75	1.0000	1.0000
L51	67	LDF7-50A(1-5/8)	2.25 - 2.75	1.0000	1.0000
L52	1	Reinforcement CCI-065125	2.00 - 2.25	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K <sub>a</sub> No Ice	K <sub>a</sub> Ice
L52	2	Reinforcement CCI-065125	2.00 - 2.25	1.0000	1.0000
L52	3	Reinforcement CCI-065125	2.00 - 2.25	1.0000	1.0000
L52	4	Reinforcement CCI-065125	2.00 - 2.25	1.0000	1.0000
L52	17	Reinforcement CCI-065125	2.00 - 2.25	1.0000	1.0000
L52	19	Reinforcement CCI-065125	2.00 - 2.25	1.0000	1.0000
L52	21	Reinforcement CCI-065125	2.00 - 2.25	1.0000	1.0000
L52	23	Reinforcement CCI-065125	2.00 - 2.25	1.0000	1.0000
L52	25	Reinforcement CCI-065125	2.00 - 2.25	1.0000	1.0000
L52	27	Reinforcement CCI-065125	2.00 - 2.25	1.0000	1.0000
L52	54	LDF7-50A(1-5/8)	2.00 - 2.25	1.0000	1.0000
L52	59	LDF4-50A(1/2)	2.00 - 2.25	1.0000	1.0000
L52	60	2" (Nominal) Conduit	2.00 - 2.25	1.0000	1.0000
L52	62	EC4-50(1/2)	2.00 - 2.25	1.0000	1.0000
L52	67	LDF7-50A(1-5/8)	2.00 - 2.25	1.0000	1.0000
L53	1	Reinforcement CCI-065125	0.00 - 2.00	1.0000	1.0000
L53	2	Reinforcement CCI-065125	0.00 - 2.00	1.0000	1.0000
L53	3	Reinforcement CCI-065125	0.00 - 2.00	1.0000	1.0000
L53	4	Reinforcement CCI-065125	0.00 - 2.00	1.0000	1.0000
L53	17	Reinforcement CCI-065125	0.00 - 2.00	1.0000	1.0000
L53	19	Reinforcement CCI-065125	0.00 - 2.00	1.0000	1.0000
L53	21	Reinforcement CCI-065125	0.00 - 2.00	1.0000	1.0000
L53	23	Reinforcement CCI-065125	0.00 - 2.00	1.0000	1.0000
L53	25	Reinforcement CCI-065125	0.00 - 2.00	1.0000	1.0000
L53	27	Reinforcement CCI-065125	0.00 - 2.00	1.0000	1.0000
L53	54	LDF7-50A(1-5/8)	0.00 - 2.00	1.0000	1.0000
L53	59	LDF4-50A(1/2)	0.00 - 2.00	1.0000	1.0000
L53	60	2" (Nominal) Conduit	0.00 - 2.00	1.0000	1.0000
L53	62	EC4-50(1/2)	0.00 - 2.00	1.0000	1.0000
L53	67	LDF7-50A(1-5/8)	0.00 - 2.00	1.0000	1.0000

**Effective Width of Flat Linear Attachments / Feed Lines**

Tower Section	Attachment Record No.	Description	Attachment Segment Elev.	Ratio Calculation Method	Effective Width Ratio
L15	36	CCI-060100 Reinforcement	105.75 - 108.25	Auto	0.3802
L15	37	CCI-060100 Reinforcement	105.75 - 108.25	Auto	0.3802
L15	38	CCI-060100 Reinforcement	105.75 - 108.25	Auto	0.3802

Tower Section	Attachment Record No.	Description	Attachment Segment Elev.	Ratio Calculation Method	Effective Width Ratio
L16	29	CCI-040125 Reinforcement	101.50 - 104.00	Auto	0.0297
L16	30	CCI-040125 Reinforcement	101.50 - 104.00	Auto	0.0297
L16	31	CCI-040125 Reinforcement	101.50 - 104.00	Auto	0.0297
L16	32	CCI-040125 Reinforcement	101.50 - 104.00	Auto	0.0297
L16	33	CCI-040125 Reinforcement	101.50 - 104.00	Auto	0.0297
L16	34	CCI-040125 Reinforcement	101.50 - 104.00	Auto	0.0297
L16	36	CCI-060100 Reinforcement	101.50 - 105.75	Auto	0.3579
L16	37	CCI-060100 Reinforcement	101.50 - 105.75	Auto	0.3579
L16	38	CCI-060100 Reinforcement	101.50 - 105.75	Auto	0.3579
L17	29	CCI-040125 Reinforcement	101.25 - 101.50	Auto	0.2108
L17	30	CCI-040125 Reinforcement	101.25 - 101.50	Auto	0.2108
L17	31	CCI-040125 Reinforcement	101.25 - 101.50	Auto	0.2108
L17	32	CCI-040125 Reinforcement	101.25 - 101.50	Auto	0.2108
L17	33	CCI-040125 Reinforcement	101.25 - 101.50	Auto	0.2108
L17	34	CCI-040125 Reinforcement	101.25 - 101.50	Auto	0.2108
L17	36	CCI-060100 Reinforcement	101.25 - 101.50	Auto	0.4738
L17	37	CCI-060100 Reinforcement	101.25 - 101.50	Auto	0.4738
L17	38	CCI-060100 Reinforcement	101.25 - 101.50	Auto	0.4738
L18	29	CCI-040125 Reinforcement	101.00 - 101.25	Auto	0.2087
L18	30	CCI-040125 Reinforcement	101.00 - 101.25	Auto	0.2087
L18	31	CCI-040125 Reinforcement	101.00 - 101.25	Auto	0.2087
L18	32	CCI-040125 Reinforcement	101.00 - 101.25	Auto	0.2087
L18	33	CCI-040125 Reinforcement	101.00 - 101.25	Auto	0.2087
L18	34	CCI-040125 Reinforcement	101.00 - 101.25	Auto	0.2087
L18	36	CCI-060100 Reinforcement	101.00 - 101.25	Auto	0.4725
L18	37	CCI-060100 Reinforcement	101.00 - 101.25	Auto	0.4725
L18	38	CCI-060100 Reinforcement	101.00 - 101.25	Auto	0.4725
L19	29	CCI-040125 Reinforcement	100.75 - 101.00	Auto	0.0911
L19	30	CCI-040125 Reinforcement	100.75 - 101.00	Auto	0.0911
L19	31	CCI-040125 Reinforcement	100.75 - 101.00	Auto	0.0911
L19	32	CCI-040125 Reinforcement	100.75 - 101.00	Auto	0.0911
L19	33	CCI-040125 Reinforcement	100.75 - 101.00	Auto	0.0911

Tower Section	Attachment Record No.	Description	Attachment Segment Elev.	Ratio Calculation Method	Effective Width Ratio
L19	34	CCI-040125 Reinforcement	100.75 - 101.00	Auto	0.0911
L19	36	CCI-060100 Reinforcement	100.75 - 101.00	Auto	0.3941
L19	37	CCI-060100 Reinforcement	100.75 - 101.00	Auto	0.3941
L19	38	CCI-060100 Reinforcement	100.75 - 101.00	Auto	0.3941
L20	29	CCI-040125 Reinforcement	95.75 - 100.75	Auto	0.0639
L20	30	CCI-040125 Reinforcement	95.75 - 100.75	Auto	0.0639
L20	31	CCI-040125 Reinforcement	95.75 - 100.75	Auto	0.0639
L20	32	CCI-040125 Reinforcement	95.75 - 100.75	Auto	0.0639
L20	33	CCI-040125 Reinforcement	95.75 - 100.75	Auto	0.0639
L20	34	CCI-040125 Reinforcement	95.75 - 100.75	Auto	0.0639
L20	36	CCI-060100 Reinforcement	98.25 - 100.75	Auto	0.3828
L20	37	CCI-060100 Reinforcement	98.25 - 100.75	Auto	0.3828
L20	38	CCI-060100 Reinforcement	98.25 - 100.75	Auto	0.3828
L21	13	CCI-045100 Reinforcement	87.83 - 90.00	Auto	0.0943
L21	14	CCI-045100 Reinforcement	87.83 - 90.00	Auto	0.0943
L21	15	CCI-045100 Reinforcement	87.83 - 90.00	Auto	0.0943
L21	29	CCI-040125 Reinforcement	87.83 - 95.75	Auto	0.0108
L21	30	CCI-040125 Reinforcement	87.83 - 95.75	Auto	0.0108
L21	31	CCI-040125 Reinforcement	87.83 - 95.75	Auto	0.0108
L21	32	CCI-040125 Reinforcement	87.83 - 95.75	Auto	0.0108
L21	33	CCI-040125 Reinforcement	87.83 - 95.75	Auto	0.0108
L21	34	CCI-040125 Reinforcement	87.83 - 95.75	Auto	0.0108
L22	13	CCI-045100 Reinforcement	86.83 - 87.83	Auto	0.2000
L22	14	CCI-045100 Reinforcement	86.83 - 87.83	Auto	0.2000
L22	15	CCI-045100 Reinforcement	86.83 - 87.83	Auto	0.2000
L22	29	CCI-040125 Reinforcement	86.83 - 87.83	Auto	0.1000
L22	30	CCI-040125 Reinforcement	86.83 - 87.83	Auto	0.1000
L22	31	CCI-040125 Reinforcement	86.83 - 87.83	Auto	0.1000
L22	32	CCI-040125 Reinforcement	86.83 - 87.83	Auto	0.1000
L22	33	CCI-040125 Reinforcement	86.83 - 87.83	Auto	0.1000
L22	34	CCI-040125 Reinforcement	86.83 - 87.83	Auto	0.1000
L23	13	CCI-045100 Reinforcement	81.83 - 86.83	Auto	0.1730

Tower Section	Attachment Record No.	Description	Attachment Segment Elev.	Ratio Calculation Method	Effective Width Ratio
L23	14	CCI-045100 Reinforcement	81.83 - 86.83	Auto	0.1730
L23	15	CCI-045100 Reinforcement	81.83 - 86.83	Auto	0.1730
L23	29	CCI-040125 Reinforcement	81.83 - 86.83	Auto	0.0697
L23	30	CCI-040125 Reinforcement	81.83 - 86.83	Auto	0.0697
L23	31	CCI-040125 Reinforcement	81.83 - 86.83	Auto	0.0697
L23	32	CCI-040125 Reinforcement	81.83 - 86.83	Auto	0.0697
L23	33	CCI-040125 Reinforcement	81.83 - 86.83	Auto	0.0697
L23	34	CCI-040125 Reinforcement	81.83 - 86.83	Auto	0.0697
L24	13	CCI-045100 Reinforcement	81.50 - 81.83	Auto	0.1534
L24	14	CCI-045100 Reinforcement	81.50 - 81.83	Auto	0.1534
L24	15	CCI-045100 Reinforcement	81.50 - 81.83	Auto	0.1534
L24	18	CCI-065125 Reinforcement	81.50 - 81.80	Auto	0.4138
L24	20	CCI-065125 Reinforcement	81.50 - 81.80	Auto	0.4138
L24	22	CCI-065125 Reinforcement	81.50 - 81.80	Auto	0.4138
L24	24	CCI-065125 Reinforcement	81.50 - 81.80	Auto	0.4138
L24	26	CCI-065125 Reinforcement	81.50 - 81.80	Auto	0.4138
L24	28	CCI-065125 Reinforcement	81.50 - 81.80	Auto	0.4138
L24	29	CCI-040125 Reinforcement	81.80 - 81.83	Auto	0.0488
L24	30	CCI-040125 Reinforcement	81.80 - 81.83	Auto	0.0488
L24	31	CCI-040125 Reinforcement	81.80 - 81.83	Auto	0.0488
L24	32	CCI-040125 Reinforcement	81.80 - 81.83	Auto	0.0488
L24	33	CCI-040125 Reinforcement	81.80 - 81.83	Auto	0.0488
L24	34	CCI-040125 Reinforcement	81.80 - 81.83	Auto	0.0488
L25	13	CCI-045100 Reinforcement	81.25 - 81.50	Auto	0.1611
L25	14	CCI-045100 Reinforcement	81.25 - 81.50	Auto	0.1611
L25	15	CCI-045100 Reinforcement	81.25 - 81.50	Auto	0.1611
L25	18	CCI-065125 Reinforcement	81.25 - 81.50	Auto	0.4192
L25	20	CCI-065125 Reinforcement	81.25 - 81.50	Auto	0.4192
L25	22	CCI-065125 Reinforcement	81.25 - 81.50	Auto	0.4192
L25	24	CCI-065125 Reinforcement	81.25 - 81.50	Auto	0.4192
L25	26	CCI-065125 Reinforcement	81.25 - 81.50	Auto	0.4192
L25	28	CCI-065125 Reinforcement	81.25 - 81.50	Auto	0.4192

Tower Section	Attachment Record No.	Description	Attachment Segment Elev.	Ratio Calculation Method	Effective Width Ratio
L26	13	CCI-045100 Reinforcement	80.00 - 81.25	Auto	0.1458
L26	14	CCI-045100 Reinforcement	80.00 - 81.25	Auto	0.1458
L26	15	CCI-045100 Reinforcement	80.00 - 81.25	Auto	0.1458
L26	18	CCI-065125 Reinforcement	76.25 - 81.25	Auto	0.3991
L26	20	CCI-065125 Reinforcement	76.25 - 81.25	Auto	0.3991
L26	22	CCI-065125 Reinforcement	76.25 - 81.25	Auto	0.3991
L26	24	CCI-065125 Reinforcement	76.25 - 81.25	Auto	0.3991
L26	26	CCI-065125 Reinforcement	76.25 - 81.25	Auto	0.3991
L26	28	CCI-065125 Reinforcement	76.25 - 81.25	Auto	0.3991
L27	18	CCI-065125 Reinforcement	71.25 - 76.25	Auto	0.3668
L27	20	CCI-065125 Reinforcement	71.25 - 76.25	Auto	0.3668
L27	22	CCI-065125 Reinforcement	71.25 - 76.25	Auto	0.3668
L27	24	CCI-065125 Reinforcement	71.25 - 76.25	Auto	0.3668
L27	26	CCI-065125 Reinforcement	71.25 - 76.25	Auto	0.3668
L27	28	CCI-065125 Reinforcement	71.25 - 76.25	Auto	0.3668
L28	18	CCI-065125 Reinforcement	66.25 - 71.25	Auto	0.3346
L28	20	CCI-065125 Reinforcement	66.25 - 71.25	Auto	0.3346
L28	22	CCI-065125 Reinforcement	66.25 - 71.25	Auto	0.3346
L28	24	CCI-065125 Reinforcement	66.25 - 71.25	Auto	0.3346
L28	26	CCI-065125 Reinforcement	66.25 - 71.25	Auto	0.3346
L28	28	CCI-065125 Reinforcement	66.25 - 71.25	Auto	0.3346
L29	18	CCI-065125 Reinforcement	61.25 - 66.25	Auto	0.3057
L29	20	CCI-065125 Reinforcement	61.25 - 66.25	Auto	0.3057
L29	22	CCI-065125 Reinforcement	61.25 - 66.25	Auto	0.3057
L29	24	CCI-065125 Reinforcement	61.25 - 66.25	Auto	0.3057
L29	26	CCI-065125 Reinforcement	61.25 - 66.25	Auto	0.3057
L29	28	CCI-065125 Reinforcement	61.25 - 66.25	Auto	0.3057
L30	18	CCI-065125 Reinforcement	56.25 - 61.25	Auto	0.2768
L30	20	CCI-065125 Reinforcement	56.25 - 61.25	Auto	0.2768
L30	22	CCI-065125 Reinforcement	56.25 - 61.25	Auto	0.2768
L30	24	CCI-065125 Reinforcement	56.25 - 61.25	Auto	0.2768
L30	26	CCI-065125 Reinforcement	56.25 - 61.25	Auto	0.2768



Tower Section	Attachment Record No.	Description	Attachment Segment Elev.	Ratio Calculation Method	Effective Width Ratio
L30	28	CCI-065125 Reinforcement	56.25 - 61.25	Auto	0.2768
L31	18	CCI-065125 Reinforcement	51.25 - 56.25	Auto	0.2446
L31	20	CCI-065125 Reinforcement	51.25 - 56.25	Auto	0.2446
L31	22	CCI-065125 Reinforcement	51.25 - 56.25	Auto	0.2446
L31	24	CCI-065125 Reinforcement	51.25 - 56.25	Auto	0.2446
L31	26	CCI-065125 Reinforcement	51.25 - 56.25	Auto	0.2446
L31	28	CCI-065125 Reinforcement	51.25 - 56.25	Auto	0.2446
L32	5	CCI-060100 Reinforcement	43.33 - 45.10	Auto	0.1290
L32	6	CCI-060100 Reinforcement	45.10 - 47.33	Auto	0.1400
L32	7	CCI-060100 Reinforcement	43.33 - 45.10	Auto	0.1290
L32	8	CCI-060100 Reinforcement	45.10 - 47.33	Auto	0.1400
L32	9	CCI-060100 Reinforcement	43.33 - 45.10	Auto	0.1290
L32	10	CCI-060100 Reinforcement	45.10 - 47.33	Auto	0.1400
L32	11	CCI-060100 Reinforcement	43.33 - 45.10	Auto	0.1290
L32	12	CCI-060100 Reinforcement	45.10 - 47.33	Auto	0.1400
L32	18	CCI-065125 Reinforcement	43.33 - 51.25	Auto	0.2117
L32	20	CCI-065125 Reinforcement	43.33 - 51.25	Auto	0.2117
L32	22	CCI-065125 Reinforcement	43.33 - 51.25	Auto	0.2117
L32	24	CCI-065125 Reinforcement	43.33 - 51.25	Auto	0.2117
L32	26	CCI-065125 Reinforcement	43.33 - 51.25	Auto	0.2117
L32	28	CCI-065125 Reinforcement	43.33 - 51.25	Auto	0.2117
L33	5	CCI-060100 Reinforcement	42.33 - 43.33	Auto	0.2057
L33	7	CCI-060100 Reinforcement	42.33 - 43.33	Auto	0.2057
L33	9	CCI-060100 Reinforcement	42.33 - 43.33	Auto	0.2057
L33	11	CCI-060100 Reinforcement	42.33 - 43.33	Auto	0.2057
L33	18	CCI-065125 Reinforcement	42.33 - 43.33	Auto	0.2668
L33	20	CCI-065125 Reinforcement	42.33 - 43.33	Auto	0.2668
L33	22	CCI-065125 Reinforcement	42.33 - 43.33	Auto	0.2668
L33	24	CCI-065125 Reinforcement	42.33 - 43.33	Auto	0.2668
L33	26	CCI-065125 Reinforcement	42.33 - 43.33	Auto	0.2668
L33	28	CCI-065125 Reinforcement	42.33 - 43.33	Auto	0.2668
L34	5	CCI-060100 Reinforcement	37.40 - 42.33	Auto	0.1857

Tower Section	Attachment Record No.	Description	Attachment Segment Elev.	Ratio Calculation Method	Effective Width Ratio
L34	7	CCI-060100 Reinforcement	37.40 - 42.33	Auto	0.1857
L34	9	CCI-060100 Reinforcement	37.40 - 42.33	Auto	0.1857
L34	11	CCI-060100 Reinforcement	37.40 - 42.33	Auto	0.1857
L34	18	CCI-065125 Reinforcement	37.40 - 42.33	Auto	0.2484
L34	20	CCI-065125 Reinforcement	37.40 - 42.33	Auto	0.2484
L34	22	CCI-065125 Reinforcement	37.40 - 42.33	Auto	0.2484
L34	24	CCI-065125 Reinforcement	37.40 - 42.33	Auto	0.2484
L34	26	CCI-065125 Reinforcement	37.40 - 42.33	Auto	0.2484
L34	28	CCI-065125 Reinforcement	37.40 - 42.33	Auto	0.2484
L35	5	CCI-060100 Reinforcement	37.15 - 37.40	Auto	0.1714
L35	7	CCI-060100 Reinforcement	37.15 - 37.40	Auto	0.1714
L35	9	CCI-060100 Reinforcement	37.15 - 37.40	Auto	0.1714
L35	11	CCI-060100 Reinforcement	37.15 - 37.40	Auto	0.1714
L35	18	CCI-065125 Reinforcement	37.15 - 37.40	Auto	0.2352
L35	20	CCI-065125 Reinforcement	37.15 - 37.40	Auto	0.2352
L35	22	CCI-065125 Reinforcement	37.15 - 37.40	Auto	0.2352
L35	24	CCI-065125 Reinforcement	37.15 - 37.40	Auto	0.2352
L35	26	CCI-065125 Reinforcement	37.15 - 37.40	Auto	0.2352
L35	28	CCI-065125 Reinforcement	37.15 - 37.40	Auto	0.2352
L36	5	CCI-060100 Reinforcement	32.15 - 37.15	Auto	0.1496
L36	7	CCI-060100 Reinforcement	32.15 - 37.15	Auto	0.1496
L36	9	CCI-060100 Reinforcement	32.15 - 37.15	Auto	0.1496
L36	11	CCI-060100 Reinforcement	32.15 - 37.15	Auto	0.1496
L36	18	CCI-065125 Reinforcement	32.15 - 37.15	Auto	0.2151
L36	20	CCI-065125 Reinforcement	32.15 - 37.15	Auto	0.2151
L36	22	CCI-065125 Reinforcement	32.15 - 37.15	Auto	0.2151
L36	24	CCI-065125 Reinforcement	32.15 - 37.15	Auto	0.2151
L36	26	CCI-065125 Reinforcement	32.15 - 37.15	Auto	0.2151
L36	28	CCI-065125 Reinforcement	32.15 - 37.15	Auto	0.2151
L37	5	CCI-060100 Reinforcement	27.15 - 32.15	Auto	0.1148
L37	7	CCI-060100 Reinforcement	27.15 - 32.15	Auto	0.1148
L37	9	CCI-060100 Reinforcement	27.15 - 32.15	Auto	0.1148

Tower Section	Attachment Record No.	Description	Attachment Segment Elev.	Ratio Calculation Method	Effective Width Ratio
L37	11	CCI-060100 Reinforcement	27.15 - 32.15	Auto	0.1148
L37	18	CCI-065125 Reinforcement	27.15 - 32.15	Auto	0.1828
L37	20	CCI-065125 Reinforcement	27.15 - 32.15	Auto	0.1828
L37	22	CCI-065125 Reinforcement	27.15 - 32.15	Auto	0.1828
L37	24	CCI-065125 Reinforcement	27.15 - 32.15	Auto	0.1828
L37	26	CCI-065125 Reinforcement	27.15 - 32.15	Auto	0.1828
L37	28	CCI-065125 Reinforcement	27.15 - 32.15	Auto	0.1828
L38	1	CCI-065125 Reinforcement	22.15 - 22.25	Auto	0.1416
L38	2	CCI-065125 Reinforcement	22.15 - 22.25	Auto	0.1416
L38	3	CCI-065125 Reinforcement	22.15 - 22.25	Auto	0.1416
L38	4	CCI-065125 Reinforcement	22.15 - 22.25	Auto	0.1416
L38	5	CCI-060100 Reinforcement	22.25 - 27.15	Auto	0.0838
L38	7	CCI-060100 Reinforcement	22.25 - 27.15	Auto	0.0838
L38	9	CCI-060100 Reinforcement	22.25 - 27.15	Auto	0.0838
L38	11	CCI-060100 Reinforcement	22.25 - 27.15	Auto	0.0838
L38	17	CCI-065125 Reinforcement	22.15 - 26.01	Auto	0.1511
L38	18	CCI-065125 Reinforcement	26.01 - 27.15	Auto	0.1638
L38	19	CCI-065125 Reinforcement	22.15 - 26.01	Auto	0.1511
L38	20	CCI-065125 Reinforcement	26.01 - 27.15	Auto	0.1638
L38	21	CCI-065125 Reinforcement	22.15 - 26.01	Auto	0.1511
L38	22	CCI-065125 Reinforcement	26.01 - 27.15	Auto	0.1638
L38	23	CCI-065125 Reinforcement	22.15 - 26.01	Auto	0.1511
L38	24	CCI-065125 Reinforcement	26.01 - 27.15	Auto	0.1638
L38	25	CCI-065125 Reinforcement	22.15 - 26.01	Auto	0.1511
L38	26	CCI-065125 Reinforcement	26.01 - 27.15	Auto	0.1638
L38	27	CCI-065125 Reinforcement	22.15 - 26.01	Auto	0.1511
L38	28	CCI-065125 Reinforcement	26.01 - 27.15	Auto	0.1638
L39	1	CCI-065125 Reinforcement	19.50 - 22.15	Auto	0.1312
L39	2	CCI-065125 Reinforcement	19.50 - 22.15	Auto	0.1312
L39	3	CCI-065125 Reinforcement	19.50 - 22.15	Auto	0.1312
L39	4	CCI-065125 Reinforcement	19.50 - 22.15	Auto	0.1312
L39	17	CCI-065125 Reinforcement	19.50 - 22.15	Auto	0.1312

Tower Section	Attachment Record No.	Description	Attachment Segment Elev.	Ratio Calculation Method	Effective Width Ratio
L39	19	CCI-065125 Reinforcement	19.50 - 22.15	Auto	0.1312
L39	21	CCI-065125 Reinforcement	19.50 - 22.15	Auto	0.1312
L39	23	CCI-065125 Reinforcement	19.50 - 22.15	Auto	0.1312
L39	25	CCI-065125 Reinforcement	19.50 - 22.15	Auto	0.1312
L39	27	CCI-065125 Reinforcement	19.50 - 22.15	Auto	0.1312
L40	1	CCI-065125 Reinforcement	19.25 - 19.50	Auto	0.1441
L40	2	CCI-065125 Reinforcement	19.25 - 19.50	Auto	0.1441
L40	3	CCI-065125 Reinforcement	19.25 - 19.50	Auto	0.1441
L40	4	CCI-065125 Reinforcement	19.25 - 19.50	Auto	0.1441
L40	17	CCI-065125 Reinforcement	19.25 - 19.50	Auto	0.1441
L40	19	CCI-065125 Reinforcement	19.25 - 19.50	Auto	0.1441
L40	21	CCI-065125 Reinforcement	19.25 - 19.50	Auto	0.1441
L40	23	CCI-065125 Reinforcement	19.25 - 19.50	Auto	0.1441
L40	25	CCI-065125 Reinforcement	19.25 - 19.50	Auto	0.1441
L40	27	CCI-065125 Reinforcement	19.25 - 19.50	Auto	0.1441
L41	1	CCI-065125 Reinforcement	14.25 - 19.25	Auto	0.1240
L41	2	CCI-065125 Reinforcement	14.25 - 19.25	Auto	0.1240
L41	3	CCI-065125 Reinforcement	14.25 - 19.25	Auto	0.1240
L41	4	CCI-065125 Reinforcement	14.25 - 19.25	Auto	0.1240
L41	17	CCI-065125 Reinforcement	14.25 - 19.25	Auto	0.1240
L41	19	CCI-065125 Reinforcement	14.25 - 19.25	Auto	0.1240
L41	21	CCI-065125 Reinforcement	14.25 - 19.25	Auto	0.1240
L41	23	CCI-065125 Reinforcement	14.25 - 19.25	Auto	0.1240
L41	25	CCI-065125 Reinforcement	14.25 - 19.25	Auto	0.1240
L41	27	CCI-065125 Reinforcement	14.25 - 19.25	Auto	0.1240
L42	1	CCI-065125 Reinforcement	9.25 - 14.25	Auto	0.0985
L42	2	CCI-065125 Reinforcement	9.25 - 14.25	Auto	0.0985
L42	3	CCI-065125 Reinforcement	9.25 - 14.25	Auto	0.0985
L42	4	CCI-065125 Reinforcement	9.25 - 14.25	Auto	0.0985
L42	17	CCI-065125 Reinforcement	9.25 - 14.25	Auto	0.0985
L42	19	CCI-065125 Reinforcement	9.25 - 14.25	Auto	0.0985
L42	21	CCI-065125 Reinforcement	9.25 - 14.25	Auto	0.0985

Tower Section	Attachment Record No.	Description	Attachment Segment Elev.	Ratio Calculation Method	Effective Width Ratio
L42	23	CCI-065125 Reinforcement	9.25 - 14.25	Auto	0.0985
L42	25	CCI-065125 Reinforcement	9.25 - 14.25	Auto	0.0985
L42	27	CCI-065125 Reinforcement	9.25 - 14.25	Auto	0.0985
L43	1	CCI-065125 Reinforcement	9.00 - 9.25	Auto	0.0852
L43	2	CCI-065125 Reinforcement	9.00 - 9.25	Auto	0.0852
L43	3	CCI-065125 Reinforcement	9.00 - 9.25	Auto	0.0852
L43	4	CCI-065125 Reinforcement	9.00 - 9.25	Auto	0.0852
L43	17	CCI-065125 Reinforcement	9.00 - 9.25	Auto	0.0852
L43	19	CCI-065125 Reinforcement	9.00 - 9.25	Auto	0.0852
L43	21	CCI-065125 Reinforcement	9.00 - 9.25	Auto	0.0852
L43	23	CCI-065125 Reinforcement	9.00 - 9.25	Auto	0.0852
L43	25	CCI-065125 Reinforcement	9.00 - 9.25	Auto	0.0852
L43	27	CCI-065125 Reinforcement	9.00 - 9.25	Auto	0.0852
L44	1	CCI-065125 Reinforcement	8.75 - 9.00	Auto	0.0907
L44	2	CCI-065125 Reinforcement	8.75 - 9.00	Auto	0.0907
L44	3	CCI-065125 Reinforcement	8.75 - 9.00	Auto	0.0907
L44	4	CCI-065125 Reinforcement	8.75 - 9.00	Auto	0.0907
L44	17	CCI-065125 Reinforcement	8.75 - 9.00	Auto	0.0907
L44	19	CCI-065125 Reinforcement	8.75 - 9.00	Auto	0.0907
L44	21	CCI-065125 Reinforcement	8.75 - 9.00	Auto	0.0907
L44	23	CCI-065125 Reinforcement	8.75 - 9.00	Auto	0.0907
L44	25	CCI-065125 Reinforcement	8.75 - 9.00	Auto	0.0907
L44	27	CCI-065125 Reinforcement	8.75 - 9.00	Auto	0.0907
L45	1	CCI-065125 Reinforcement	7.00 - 8.75	Auto	0.0856
L45	2	CCI-065125 Reinforcement	7.00 - 8.75	Auto	0.0856
L45	3	CCI-065125 Reinforcement	7.00 - 8.75	Auto	0.0856
L45	4	CCI-065125 Reinforcement	7.00 - 8.75	Auto	0.0856
L45	17	CCI-065125 Reinforcement	7.00 - 8.75	Auto	0.0856
L45	19	CCI-065125 Reinforcement	7.00 - 8.75	Auto	0.0856
L45	21	CCI-065125 Reinforcement	7.00 - 8.75	Auto	0.0856
L45	23	CCI-065125 Reinforcement	7.00 - 8.75	Auto	0.0856
L45	25	CCI-065125 Reinforcement	7.00 - 8.75	Auto	0.0856

Tower Section	Attachment Record No.	Description	Attachment Segment Elev.	Ratio Calculation Method	Effective Width Ratio
L45	27	CCI-065125 Reinforcement	7.00 - 8.75	Auto	0.0856
L46	1	CCI-065125 Reinforcement	6.75 - 7.00	Auto	0.0670
L46	2	CCI-065125 Reinforcement	6.75 - 7.00	Auto	0.0670
L46	3	CCI-065125 Reinforcement	6.75 - 7.00	Auto	0.0670
L46	4	CCI-065125 Reinforcement	6.75 - 7.00	Auto	0.0670
L46	17	CCI-065125 Reinforcement	6.75 - 7.00	Auto	0.0670
L46	19	CCI-065125 Reinforcement	6.75 - 7.00	Auto	0.0670
L46	21	CCI-065125 Reinforcement	6.75 - 7.00	Auto	0.0670
L46	23	CCI-065125 Reinforcement	6.75 - 7.00	Auto	0.0670
L46	25	CCI-065125 Reinforcement	6.75 - 7.00	Auto	0.0670
L46	27	CCI-065125 Reinforcement	6.75 - 7.00	Auto	0.0670
L47	1	CCI-065125 Reinforcement	5.00 - 6.75	Auto	0.0619
L47	2	CCI-065125 Reinforcement	5.00 - 6.75	Auto	0.0619
L47	3	CCI-065125 Reinforcement	5.00 - 6.75	Auto	0.0619
L47	4	CCI-065125 Reinforcement	5.00 - 6.75	Auto	0.0619
L47	17	CCI-065125 Reinforcement	5.00 - 6.75	Auto	0.0619
L47	19	CCI-065125 Reinforcement	5.00 - 6.75	Auto	0.0619
L47	21	CCI-065125 Reinforcement	5.00 - 6.75	Auto	0.0619
L47	23	CCI-065125 Reinforcement	5.00 - 6.75	Auto	0.0619
L47	25	CCI-065125 Reinforcement	5.00 - 6.75	Auto	0.0619
L47	27	CCI-065125 Reinforcement	5.00 - 6.75	Auto	0.0619
L48	1	CCI-065125 Reinforcement	4.75 - 5.00	Auto	0.1854
L48	2	CCI-065125 Reinforcement	4.75 - 5.00	Auto	0.1854
L48	3	CCI-065125 Reinforcement	4.75 - 5.00	Auto	0.1854
L48	4	CCI-065125 Reinforcement	4.75 - 5.00	Auto	0.1854
L48	17	CCI-065125 Reinforcement	4.75 - 5.00	Auto	0.1854
L48	19	CCI-065125 Reinforcement	4.75 - 5.00	Auto	0.1854
L48	21	CCI-065125 Reinforcement	4.75 - 5.00	Auto	0.1854
L48	23	CCI-065125 Reinforcement	4.75 - 5.00	Auto	0.1854
L48	25	CCI-065125 Reinforcement	4.75 - 5.00	Auto	0.1854
L48	27	CCI-065125 Reinforcement	4.75 - 5.00	Auto	0.1854
L49	1	CCI-065125 Reinforcement	3.00 - 4.75	Auto	0.1736

Tower Section	Attachment Record No.	Description	Attachment Segment Elev.	Ratio Calculation Method	Effective Width Ratio
L49	2	CCI-065125 Reinforcement	3.00 - 4.75	Auto	0.1736
L49	3	CCI-065125 Reinforcement	3.00 - 4.75	Auto	0.1736
L49	4	CCI-065125 Reinforcement	3.00 - 4.75	Auto	0.1736
L49	17	CCI-065125 Reinforcement	3.00 - 4.75	Auto	0.1736
L49	19	CCI-065125 Reinforcement	3.00 - 4.75	Auto	0.1736
L49	21	CCI-065125 Reinforcement	3.00 - 4.75	Auto	0.1736
L49	23	CCI-065125 Reinforcement	3.00 - 4.75	Auto	0.1736
L49	25	CCI-065125 Reinforcement	3.00 - 4.75	Auto	0.1736
L49	27	CCI-065125 Reinforcement	3.00 - 4.75	Auto	0.1736
L50	1	CCI-065125 Reinforcement	2.75 - 3.00	Auto	0.1752
L50	2	CCI-065125 Reinforcement	2.75 - 3.00	Auto	0.1752
L50	3	CCI-065125 Reinforcement	2.75 - 3.00	Auto	0.1752
L50	4	CCI-065125 Reinforcement	2.75 - 3.00	Auto	0.1752
L50	17	CCI-065125 Reinforcement	2.75 - 3.00	Auto	0.1752
L50	19	CCI-065125 Reinforcement	2.75 - 3.00	Auto	0.1752
L50	21	CCI-065125 Reinforcement	2.75 - 3.00	Auto	0.1752
L50	23	CCI-065125 Reinforcement	2.75 - 3.00	Auto	0.1752
L50	25	CCI-065125 Reinforcement	2.75 - 3.00	Auto	0.1752
L50	27	CCI-065125 Reinforcement	2.75 - 3.00	Auto	0.1752
L51	1	CCI-065125 Reinforcement	2.25 - 2.75	Auto	0.1733
L51	2	CCI-065125 Reinforcement	2.25 - 2.75	Auto	0.1733
L51	3	CCI-065125 Reinforcement	2.25 - 2.75	Auto	0.1733
L51	4	CCI-065125 Reinforcement	2.25 - 2.75	Auto	0.1733
L51	17	CCI-065125 Reinforcement	2.25 - 2.75	Auto	0.1733
L51	19	CCI-065125 Reinforcement	2.25 - 2.75	Auto	0.1733
L51	21	CCI-065125 Reinforcement	2.25 - 2.75	Auto	0.1733
L51	23	CCI-065125 Reinforcement	2.25 - 2.75	Auto	0.1733
L51	25	CCI-065125 Reinforcement	2.25 - 2.75	Auto	0.1733
L51	27	CCI-065125 Reinforcement	2.25 - 2.75	Auto	0.1733
L52	1	CCI-065125 Reinforcement	2.00 - 2.25	Auto	0.1037
L52	2	CCI-065125 Reinforcement	2.00 - 2.25	Auto	0.1037
L52	3	CCI-065125 Reinforcement	2.00 - 2.25	Auto	0.1037

Tower Section	Attachment Record No.	Description	Attachment Segment Elev.	Ratio Calculation Method	Effective Width Ratio
L52	4	CCI-065125 Reinforcement	2.00 - 2.25	Auto	0.1037
L52	17	CCI-065125 Reinforcement	2.00 - 2.25	Auto	0.1037
L52	19	CCI-065125 Reinforcement	2.00 - 2.25	Auto	0.1037
L52	21	CCI-065125 Reinforcement	2.00 - 2.25	Auto	0.1037
L52	23	CCI-065125 Reinforcement	2.00 - 2.25	Auto	0.1037
L52	25	CCI-065125 Reinforcement	2.00 - 2.25	Auto	0.1037
L52	27	CCI-065125 Reinforcement	2.00 - 2.25	Auto	0.1037
L53	1	CCI-065125 Reinforcement	0.00 - 2.00	Auto	0.0912
L53	2	CCI-065125 Reinforcement	0.00 - 2.00	Auto	0.0912
L53	3	CCI-065125 Reinforcement	0.00 - 2.00	Auto	0.0912
L53	4	CCI-065125 Reinforcement	0.00 - 2.00	Auto	0.0912
L53	17	CCI-065125 Reinforcement	0.00 - 2.00	Auto	0.0912
L53	19	CCI-065125 Reinforcement	0.00 - 2.00	Auto	0.0912
L53	21	CCI-065125 Reinforcement	0.00 - 2.00	Auto	0.0912
L53	23	CCI-065125 Reinforcement	0.00 - 2.00	Auto	0.0912
L53	25	CCI-065125 Reinforcement	0.00 - 2.00	Auto	0.0912
L53	27	CCI-065125 Reinforcement	0.00 - 2.00	Auto	0.0912

**Discrete Tower Loads**

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustment t °	Placement ft	C <sub>A</sub> A <sub>A</sub> Front ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Side ft <sup>2</sup>	Weight K	
AIR 32 B2A/B66AA w/ Mount Pipe	A	From Leg	4.00	0.0000	165.00	No Ice	6.75	6.07	0.15
			0.00			1/2"	7.20	6.87	0.21
			1.00			Ice	7.65	7.58	0.28
						1" Ice	8.57	9.06	0.44
						2" Ice			
AIR 32 B2A/B66AA w/ Mount Pipe	B	From Leg	4.00	0.0000	165.00	No Ice	6.75	6.07	0.15
			0.00			1/2"	7.20	6.87	0.21
			1.00			Ice	7.65	7.58	0.28
						1" Ice	8.57	9.06	0.44
						2" Ice			
AIR 32 B2A/B66AA w/ Mount Pipe	C	From Leg	4.00	0.0000	165.00	No Ice	6.75	6.07	0.15
			0.00			1/2"	7.20	6.87	0.21
			1.00			Ice	7.65	7.58	0.28
						1" Ice	8.57	9.06	0.44
						2" Ice			
AIR6449 B41_T-MOBILE w/ Mount Pipe	A	From Leg	4.00	0.0000	165.00	No Ice	5.87	3.27	0.13
			0.00			1/2"	6.23	3.73	0.18



Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustmen t °	Placement ft		C <sub>AA</sub> Front ft <sup>2</sup>	C <sub>AA</sub> Side ft <sup>2</sup>	Weight K
			1.00			Ice	6.61	4.20	0.23
						1" Ice	7.38	5.20	0.36
						2" Ice			
AIR6449 B41_T-MOBILE w/ Mount Pipe	B	From Leg	4.00 0.00 1.00	0.0000	165.00	No Ice 1/2" Ice 1" Ice 2" Ice	5.87 6.23 6.61 7.38	3.27 3.73 4.20 5.20	0.13 0.18 0.23 0.36
AIR6449 B41_T-MOBILE w/ Mount Pipe	C	From Leg	4.00 0.00 1.00	0.0000	165.00	No Ice 1/2" Ice 1" Ice 2" Ice	5.87 6.23 6.61 7.38	3.27 3.73 4.20 5.20	0.13 0.18 0.23 0.36
APXVAARR24_43-U-NA20 w/ Mount Pipe	A	From Leg	4.00 0.00 1.00	0.0000	165.00	No Ice 1/2" Ice 1" Ice 2" Ice	14.69 15.46 16.23 17.82	6.87 7.55 8.25 9.67	0.19 0.31 0.46 0.79
APXVAARR24_43-U-NA20 w/ Mount Pipe	B	From Leg	4.00 0.00 1.00	0.0000	165.00	No Ice 1/2" Ice 1" Ice 2" Ice	14.69 15.46 16.23 17.82	6.87 7.55 8.25 9.67	0.19 0.31 0.46 0.79
APXVAARR24_43-U-NA20 w/ Mount Pipe	C	From Leg	4.00 0.00 1.00	0.0000	165.00	No Ice 1/2" Ice 1" Ice 2" Ice	14.69 15.46 16.23 17.82	6.87 7.55 8.25 9.67	0.19 0.31 0.46 0.79
SDX1926Q-43	A	From Leg	4.00 0.00 1.00	0.0000	165.00	No Ice 1/2" Ice 1" Ice 2" Ice	0.24 0.31 0.38 0.55	0.10 0.14 0.19 0.32	0.01 0.01 0.01 0.02
SDX1926Q-43	B	From Leg	4.00 0.00 1.00	0.0000	165.00	No Ice 1/2" Ice 1" Ice 2" Ice	0.24 0.31 0.38 0.55	0.10 0.14 0.19 0.32	0.01 0.01 0.01 0.02
SDX1926Q-43	C	From Leg	4.00 0.00 1.00	0.0000	165.00	No Ice 1/2" Ice 1" Ice 2" Ice	0.24 0.31 0.38 0.55	0.10 0.14 0.19 0.32	0.01 0.01 0.01 0.02
KRY 112 144/1	A	From Leg	4.00 0.00 0.00	0.0000	165.00	No Ice 1/2" Ice 1" Ice 2" Ice	0.35 0.43 0.51 0.70	0.17 0.23 0.30 0.46	0.01 0.01 0.02 0.03
KRY 112 144/1	B	From Leg	4.00 0.00 0.00	0.0000	165.00	No Ice 1/2" Ice 1" Ice 2" Ice	0.35 0.43 0.51 0.70	0.17 0.23 0.30 0.46	0.01 0.01 0.02 0.03
KRY 112 144/1	C	From Leg	4.00 0.00 0.00	0.0000	165.00	No Ice 1/2" Ice 1" Ice 2" Ice	0.35 0.43 0.51 0.70	0.17 0.23 0.30 0.46	0.01 0.01 0.02 0.03
RADIO 4449 B12/B71	A	From Leg	4.00 0.00 1.00	0.0000	165.00	No Ice 1/2" Ice	1.65 1.81 1.98	1.16 1.30 1.45	0.07 0.09 0.11

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustment °	Placement ft		C <sub>AA</sub> Front ft <sup>2</sup>	C <sub>AA</sub> Side ft <sup>2</sup>	Weight K
						1" Ice	2.34	1.76	0.16
						2" Ice			
RADIO 4449 B12/B71	B	From Leg	4.00	0.0000	165.00	No Ice	1.65	1.16	0.07
			0.00			1/2"	1.81	1.30	0.09
			1.00			Ice	1.98	1.45	0.11
						1" Ice	2.34	1.76	0.16
						2" Ice			
RADIO 4449 B12/B71	C	From Leg	4.00	0.0000	165.00	No Ice	1.65	1.16	0.07
			0.00			1/2"	1.81	1.30	0.09
			1.00			Ice	1.98	1.45	0.11
						1" Ice	2.34	1.76	0.16
						2" Ice			
RRUS 4415 B25_CCIV2	A	From Leg	4.00	0.0000	165.00	No Ice	1.84	0.82	0.05
			0.00			1/2"	2.01	0.94	0.06
			1.00			Ice	2.19	1.07	0.08
						1" Ice	2.57	1.37	0.12
						2" Ice			
RRUS 4415 B25_CCIV2	B	From Leg	4.00	0.0000	165.00	No Ice	1.84	0.82	0.05
			0.00			1/2"	2.01	0.94	0.06
			1.00			Ice	2.19	1.07	0.08
						1" Ice	2.57	1.37	0.12
						2" Ice			
RRUS 4415 B25_CCIV2	C	From Leg	4.00	0.0000	165.00	No Ice	1.84	0.82	0.05
			0.00			1/2"	2.01	0.94	0.06
			1.00			Ice	2.19	1.07	0.08
						1" Ice	2.57	1.37	0.12
						2" Ice			
8-ft Ladder	C	None		0.0000	165.00	No Ice	7.07	7.07	0.04
						1/2"	9.73	9.73	0.07
						Ice	11.19	11.19	0.08
						1" Ice	13.98	13.98	0.11
						2" Ice			
Platform Mount [LP 601-1]	C	None		0.0000	165.00	No Ice	28.50	28.50	1.12
						1/2"	31.69	31.69	1.68
						Ice	34.87	34.87	2.28
						1" Ice	41.23	41.23	3.65
						2" Ice			
HRK12 Handrail Kit	C	None		0.0000	165.00	No Ice	5.38	5.38	0.41
						1/2"	7.22	7.22	0.50
						Ice	8.88	8.88	0.63
						1" Ice	12.20	12.20	0.88
						2" Ice			
***									
DMP65R-BU8D w/ Mount Pipe	A	From Leg	4.00	0.0000	156.00	No Ice	15.89	7.89	0.14
			0.00			1/2"	16.81	8.74	0.25
			6.00			Ice	17.76	9.60	0.38
						1" Ice	19.70	11.37	0.68
						2" Ice			
DMP65R-BU8D w/ Mount Pipe	B	From Leg	4.00	0.0000	156.00	No Ice	15.89	7.89	0.14
			0.00			1/2"	16.81	8.74	0.25
			6.00			Ice	17.76	9.60	0.38
						1" Ice	19.70	11.37	0.68
						2" Ice			
DMP65R-BU8D w/ Mount Pipe	C	From Leg	4.00	0.0000	156.00	No Ice	15.89	7.89	0.14
			0.00			1/2"	16.81	8.74	0.25
			6.00			Ice	17.76	9.60	0.38
						1" Ice	19.70	11.37	0.68
						2" Ice			
OPA65R-BU8D w/ Mount Pipe	A	From Leg	4.00	0.0000	156.00	No Ice	17.46	8.58	0.11
			0.00			1/2"	18.46	9.49	0.22
			6.00			Ice	19.48	10.42	0.35

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustmen t °	Placement ft		C <sub>AA</sub> Front ft <sup>2</sup>	C <sub>AA</sub> Side ft <sup>2</sup>	Weight K
						1" Ice	21.58	12.33	0.66
						2" Ice			
OPA65R-BU8D w/ Mount Pipe	B	From Leg	4.00 0.00 6.00	0.0000	156.00	No Ice	17.46	8.58	0.11
						1/2"	18.46	9.49	0.22
						Ice	19.48	10.42	0.35
						1" Ice	21.58	12.33	0.66
						2" Ice			
OPA65R-BU8D w/ Mount Pipe	C	From Leg	4.00 0.00 6.00	0.0000	156.00	No Ice	17.46	8.58	0.11
						1/2"	18.46	9.49	0.22
						Ice	19.48	10.42	0.35
						1" Ice	21.58	12.33	0.66
						2" Ice			
RRUS 8843 B2/B66A	A	From Leg	4.00 0.00 6.00	0.0000	156.00	No Ice	1.64	1.35	0.07
						1/2"	1.80	1.50	0.09
						Ice	1.97	1.65	0.11
						1" Ice	2.32	1.99	0.16
						2" Ice			
RRUS 8843 B2/B66A	B	From Leg	4.00 0.00 6.00	0.0000	156.00	No Ice	1.64	1.35	0.07
						1/2"	1.80	1.50	0.09
						Ice	1.97	1.65	0.11
						1" Ice	2.32	1.99	0.16
						2" Ice			
RRUS 8843 B2/B66A	C	From Leg	4.00 0.00 6.00	0.0000	156.00	No Ice	1.64	1.35	0.07
						1/2"	1.80	1.50	0.09
						Ice	1.97	1.65	0.11
						1" Ice	2.32	1.99	0.16
						2" Ice			
RADIO 4415 B30	A	From Leg	4.00 0.00 6.00	0.0000	156.00	No Ice	1.64	0.64	0.04
						1/2"	1.80	0.75	0.05
						Ice	1.97	0.87	0.07
						1" Ice	2.33	1.13	0.11
						2" Ice			
RADIO 4415 B30	B	From Leg	4.00 0.00 6.00	0.0000	156.00	No Ice	1.64	0.64	0.04
						1/2"	1.80	0.75	0.05
						Ice	1.97	0.87	0.07
						1" Ice	2.33	1.13	0.11
						2" Ice			
RADIO 4415 B30	C	From Leg	4.00 0.00 6.00	0.0000	156.00	No Ice	1.64	0.64	0.04
						1/2"	1.80	0.75	0.05
						Ice	1.97	0.87	0.07
						1" Ice	2.33	1.13	0.11
						2" Ice			
RADIO 4449 B5/B12	A	From Leg	4.00 0.00 6.00	0.0000	156.00	No Ice	1.64	1.30	0.07
						1/2"	1.80	1.45	0.09
						Ice	1.97	1.60	0.11
						1" Ice	2.33	1.92	0.16
						2" Ice			
RADIO 4449 B5/B12	B	From Leg	4.00 0.00 6.00	0.0000	156.00	No Ice	1.64	1.30	0.07
						1/2"	1.80	1.45	0.09
						Ice	1.97	1.60	0.11
						1" Ice	2.33	1.92	0.16
						2" Ice			
RADIO 4449 B5/B12	C	From Leg	4.00 0.00 6.00	0.0000	156.00	No Ice	1.64	1.30	0.07
						1/2"	1.80	1.45	0.09
						Ice	1.97	1.60	0.11
						1" Ice	2.33	1.92	0.16
						2" Ice			
DC6-48-60-18-8F	A	From Leg	4.00 0.00 6.00	0.0000	156.00	No Ice	1.21	1.21	0.03
						1/2"	1.89	1.89	0.05
						Ice	2.11	2.11	0.08
						1" Ice	2.57	2.57	0.14

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustmen t °	Placement ft		C <sub>AA</sub> Front ft <sup>2</sup>	C <sub>AA</sub> Side ft <sup>2</sup>	Weight K
Platform Mount [LP 601-1]	C	None		0.0000	156.00	2" Ice			
						No Ice	28.50	28.50	1.12
						1/2" Ice	31.69	31.69	1.68
						1" Ice	34.87	34.87	2.28
						2" Ice	41.23	41.23	3.65
***									
NNVV-65B-R4 w/ Mount Pipe	A	From Leg	4.00 0.00 0.00	0.0000	148.00	No Ice	7.55	4.23	0.11
						1/2" Ice	8.04	4.67	0.20
						1" Ice	8.53	5.12	0.30
						2" Ice	9.56	6.05	0.53
						No Ice	7.55	4.23	0.11
NNVV-65B-R4 w/ Mount Pipe	B	From Leg	4.00 0.00 0.00	0.0000	148.00	No Ice	7.55	4.23	0.11
						1/2" Ice	8.04	4.67	0.20
						1" Ice	8.53	5.12	0.30
						2" Ice	9.56	6.05	0.53
						No Ice	7.55	4.23	0.11
NNVV-65B-R4 w/ Mount Pipe	C	From Leg	4.00 0.00 0.00	0.0000	148.00	No Ice	7.55	4.23	0.11
						1/2" Ice	8.04	4.67	0.20
						1" Ice	8.53	5.12	0.30
						2" Ice	9.56	6.05	0.53
						No Ice	7.55	4.23	0.11
800MHZ RRH	A	From Leg	4.00 0.00 0.00	0.0000	148.00	No Ice	2.13	1.77	0.05
						1/2" Ice	2.32	1.95	0.07
						1" Ice	2.51	2.13	0.10
						2" Ice	2.92	2.51	0.16
						No Ice	2.13	1.77	0.05
800MHZ RRH	B	From Leg	4.00 0.00 0.00	0.0000	148.00	No Ice	2.13	1.77	0.05
						1/2" Ice	2.32	1.95	0.07
						1" Ice	2.51	2.13	0.10
						2" Ice	2.92	2.51	0.16
						No Ice	2.13	1.77	0.05
800MHZ RRH	C	From Leg	4.00 0.00 0.00	0.0000	148.00	No Ice	2.13	1.77	0.05
						1/2" Ice	2.32	1.95	0.07
						1" Ice	2.51	2.13	0.10
						2" Ice	2.92	2.51	0.16
						No Ice	2.13	1.77	0.05
PCS 1900MHZ 4X45W-65MHZ	A	From Leg	4.00 0.00 0.00	0.0000	148.00	No Ice	2.32	2.24	0.06
						1/2" Ice	2.53	2.44	0.08
						1" Ice	2.74	2.65	0.11
						2" Ice	3.19	3.09	0.17
						No Ice	2.32	2.24	0.06
PCS 1900MHZ 4X45W-65MHZ	B	From Leg	4.00 0.00 0.00	0.0000	148.00	No Ice	2.32	2.24	0.06
						1/2" Ice	2.53	2.44	0.08
						1" Ice	2.74	2.65	0.11
						2" Ice	3.19	3.09	0.17
						No Ice	2.32	2.24	0.06
PCS 1900MHZ 4X45W-65MHZ	C	From Leg	4.00 0.00 0.00	0.0000	148.00	No Ice	2.32	2.24	0.06
						1/2" Ice	2.53	2.44	0.08
						1" Ice	2.74	2.65	0.11
						2" Ice	3.19	3.09	0.17
						No Ice	2.32	2.24	0.06
RRH2X50-800	A	From Leg	4.00 0.00 0.00	0.0000	148.00	No Ice	1.70	1.28	0.05
						1/2" Ice	1.86	1.43	0.07
						1" Ice	2.03	1.58	0.09
						2" Ice	2.40	1.91	0.14
						No Ice	1.70	1.28	0.05
RRH2X50-800	B	From Leg	4.00 0.00 0.00	0.0000	148.00	No Ice	1.70	1.28	0.05
						1/2" Ice	1.86	1.43	0.07
						1" Ice	2.03	1.58	0.09
						2" Ice	2.40	1.91	0.14
						No Ice	1.70	1.28	0.05

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustment t °	Placement ft		C <sub>A</sub> A <sub>A</sub> Front ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Side ft <sup>2</sup>	Weight K
RRH2X50-800	C	From Leg	4.00 0.00 0.00	0.0000	148.00	2" Ice			
						No Ice	1.70	1.28	0.05
						1/2"	1.86	1.43	0.07
						Ice	2.03	1.58	0.09
						1" Ice	2.40	1.91	0.14
T-Arm Mount [TA 702-3]	C	None		0.0000	148.00	2" Ice			
						No Ice	4.75	4.75	0.34
						1/2"	5.82	5.82	0.43
						Ice	6.98	6.98	0.55
						1" Ice	9.72	9.72	0.87
*** APXV18-206517-A w/ Mount Pipe	A	From Leg	4.00 0.00 0.00	0.0000	138.00	2" Ice			
						No Ice	3.79	3.16	0.06
						1/2"	4.36	3.71	0.09
						Ice	4.94	4.28	0.14
						1" Ice	6.14	5.47	0.27
APXV18-206517-A w/ Mount Pipe	B	From Leg	4.00 0.00 0.00	0.0000	138.00	2" Ice			
						No Ice	3.79	3.16	0.06
						1/2"	4.36	3.71	0.09
						Ice	4.94	4.28	0.14
						1" Ice	6.14	5.47	0.27
APXV18-206517-A w/ Mount Pipe	C	From Leg	4.00 0.00 0.00	0.0000	138.00	2" Ice			
						No Ice	3.79	3.16	0.06
						1/2"	4.36	3.71	0.09
						Ice	4.94	4.28	0.14
						1" Ice	6.14	5.47	0.27
Side Arm Mount [SO 102-3]	C	None		0.0000	138.00	2" Ice			
						No Ice	3.60	3.60	0.07
						1/2"	4.18	4.18	0.11
						Ice	4.75	4.75	0.14
						1" Ice	5.90	5.90	0.20
*** LLPX310R w/ Mount Pipe	A	From Leg	4.00 0.00 4.00	0.0000	124.00	2" Ice			
						No Ice	3.88	2.36	0.06
						1/2"	4.29	2.73	0.09
						Ice	4.72	3.12	0.13
						1" Ice	5.61	3.94	0.24
LLPX310R w/ Mount Pipe	B	From Leg	4.00 0.00 4.00	0.0000	124.00	2" Ice			
						No Ice	3.88	2.36	0.06
						1/2"	4.29	2.73	0.09
						Ice	4.72	3.12	0.13
						1" Ice	5.61	3.94	0.24
LLPX310R w/ Mount Pipe	C	From Leg	4.00 0.00 4.00	0.0000	124.00	2" Ice			
						No Ice	3.88	2.36	0.06
						1/2"	4.29	2.73	0.09
						Ice	4.72	3.12	0.13
						1" Ice	5.61	3.94	0.24
HORIZON DUO	A	From Leg	4.00 0.00 4.00	0.0000	124.00	2" Ice			
						No Ice	0.47	0.29	0.01
						1/2"	0.56	0.37	0.01
						Ice	0.65	0.44	0.02
						1" Ice	0.86	0.62	0.04
HORIZON DUO	C	From Leg	4.00 0.00 4.00	0.0000	124.00	2" Ice			
						No Ice	0.47	0.29	0.01
						1/2"	0.56	0.37	0.01
						Ice	0.65	0.44	0.02
						1" Ice	0.86	0.62	0.04
WIMAX DAP HEAD	A	From Leg	4.00 0.00 4.00	0.0000	124.00	2" Ice			
						No Ice	1.55	0.68	0.03
						1/2"	1.70	0.80	0.04
						Ice	1.87	0.92	0.06

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustmen t °	Placement ft	C <sub>AA</sub> Front ft <sup>2</sup>	C <sub>AA</sub> Side ft <sup>2</sup>	Weight K	
						1" Ice	2.22	1.19	0.09
						2" Ice			
WIMAX DAP HEAD	B	From Leg	4.00	0.0000	124.00	No Ice	1.55	0.68	0.03
			0.00			1/2"	1.70	0.80	0.04
			4.00			Ice	1.87	0.92	0.06
						1" Ice	2.22	1.19	0.09
						2" Ice			
WIMAX DAP HEAD	C	From Leg	4.00	0.0000	124.00	No Ice	1.55	0.68	0.03
			0.00			1/2"	1.70	0.80	0.04
			4.00			Ice	1.87	0.92	0.06
						1" Ice	2.22	1.19	0.09
						2" Ice			
2.375" OD x 5' Mount Pipe	A	From Leg	3.00	0.0000	124.00	No Ice	1.19	1.19	0.02
			0.00			1/2"	1.50	1.50	0.03
			0.00			Ice	1.81	1.81	0.04
						1" Ice	2.46	2.46	0.08
						2" Ice			
2.375" OD x 5' Mount Pipe	B	From Leg	3.00	0.0000	124.00	No Ice	1.19	1.19	0.02
			0.00			1/2"	1.50	1.50	0.03
			0.00			Ice	1.81	1.81	0.04
						1" Ice	2.46	2.46	0.08
						2" Ice			
2.375" OD x 5' Mount Pipe	C	From Leg	3.00	0.0000	124.00	No Ice	1.19	1.19	0.02
			0.00			1/2"	1.50	1.50	0.03
			0.00			Ice	1.81	1.81	0.04
						1" Ice	2.46	2.46	0.08
						2" Ice			
Side Arm Mount [SO 701-3]	C	None		0.0000	124.00	No Ice	3.02	3.02	0.20
						1/2"	4.18	4.18	0.24
						Ice	5.33	5.33	0.28
						1" Ice	7.63	7.63	0.36
						2" Ice			
***									
CAVITY FILTER	B	From Leg	4.00	0.0000	118.00	No Ice	0.19	0.08	0.00
			0.00			1/2"	0.25	0.12	0.00
			1.00			Ice	0.32	0.17	0.01
						1" Ice	0.47	0.29	0.02
						2" Ice			
CXL 900-3LW	B	From Leg	4.00	0.0000	118.00	No Ice	0.14	0.14	0.00
			0.00			1/2"	0.33	0.33	0.00
			1.00			Ice	0.48	0.48	0.01
						1" Ice	0.81	0.81	0.02
						2" Ice			
LNA	B	From Leg	4.00	0.0000	118.00	No Ice	0.14	0.05	0.00
			0.00			1/2"	0.19	0.09	0.00
			1.00			Ice	0.25	0.13	0.00
						1" Ice	0.39	0.24	0.01
						2" Ice			
Side Arm Mount [SO 304-1]	B	From Leg	0.00	0.0000	118.00	No Ice	0.31	0.88	0.02
			0.00			1/2"	0.50	1.26	0.03
			0.00			Ice	0.73	1.67	0.05
						1" Ice	1.29	2.58	0.09
						2" Ice			
***									
(2) HBXX-6517DS-A2M w/ Mount Pipe	A	From Leg	4.00	0.0000	111.00	No Ice	7.97	5.99	0.08
			0.00			1/2"	8.73	6.72	0.14
			0.00			Ice	9.51	7.47	0.21
						1" Ice	11.11	9.02	0.40
						2" Ice			
(2) HBXX-6517DS-A2M w/ Mount Pipe	B	From Leg	4.00	0.0000	111.00	No Ice	7.97	5.99	0.08
			0.00			1/2"	8.73	6.72	0.14

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustment °	Placement ft	C <sub>AA</sub> Front ft <sup>2</sup>	C <sub>AA</sub> Side ft <sup>2</sup>	Weight K
			0.00			Ice 9.51	7.47	0.21
						1" Ice 11.11	9.02	0.40
						2" Ice		
(2) HBXX-6517DS-A2M w/ Mount Pipe	C	From Leg	4.00	0.0000	111.00	No Ice 7.97	5.99	0.08
			0.00			1/2" 8.73	6.72	0.14
			0.00			Ice 9.51	7.47	0.21
						1" Ice 11.11	9.02	0.40
						2" Ice		
(2) LNX-6514DS-A1M w/ Mount Pipe	A	From Leg	4.00	0.0000	111.00	No Ice 4.09	3.30	0.06
			0.00			1/2" 4.49	3.68	0.13
			0.00			Ice 4.89	4.06	0.20
						1" Ice 5.71	4.87	0.38
						2" Ice		
(2) LNX-6514DS-A1M w/ Mount Pipe	B	From Leg	4.00	0.0000	111.00	No Ice 4.09	3.30	0.06
			0.00			1/2" 4.49	3.68	0.13
			0.00			Ice 4.89	4.06	0.20
						1" Ice 5.71	4.87	0.38
						2" Ice		
(2) LNX-6514DS-A1M w/ Mount Pipe	C	From Leg	4.00	0.0000	111.00	No Ice 4.09	3.30	0.06
			0.00			1/2" 4.49	3.68	0.13
			0.00			Ice 4.89	4.06	0.20
						1" Ice 5.71	4.87	0.38
						2" Ice		
B4 RRH2X60-4R	A	From Leg	4.00	0.0000	111.00	No Ice 3.36	2.00	0.06
			0.00			1/2" 3.61	2.24	0.08
			0.00			Ice 3.88	2.48	0.11
						1" Ice 4.42	2.97	0.18
						2" Ice		
B4 RRH2X60-4R	B	From Leg	4.00	0.0000	111.00	No Ice 3.36	2.00	0.06
			0.00			1/2" 3.61	2.24	0.08
			0.00			Ice 3.88	2.48	0.11
						1" Ice 4.42	2.97	0.18
						2" Ice		
B4 RRH2X60-4R	C	From Leg	4.00	0.0000	111.00	No Ice 3.36	2.00	0.06
			0.00			1/2" 3.61	2.24	0.08
			0.00			Ice 3.88	2.48	0.11
						1" Ice 4.42	2.97	0.18
						2" Ice		
(2) RRFDC-3315-PF-48	B	From Leg	4.00	0.0000	111.00	No Ice 3.36	2.19	0.03
			0.00			1/2" 3.60	2.39	0.06
			0.00			Ice 3.84	2.61	0.09
						1" Ice 4.34	3.05	0.17
						2" Ice		
Platform Mount [LP 303-1]	C	None		0.0000	111.00	No Ice 14.69	14.69	1.25
						1/2" 18.01	18.01	1.57
						Ice 21.34	21.34	1.94
						1" Ice 28.08	28.08	2.85
						2" Ice		

### Dishes

Description	Face or Leg	Dish Type	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustment °	3 dB Beam Width °	Elevation ft	Outside Diameter ft	Aperture Area ft <sup>2</sup>	Weight K
VHLP800-11	A	Paraboloid w/Shroud (HP)	From Leg	3.00	0.0000		124.00	2.80	6.16	0.02
				0.00					1/2" Ice 6.53	0.06
				4.00					1" Ice 6.90	0.09

Description	Face or Leg	Dish Type	Offset Type	Offsets: Horz Lateral Vert ft	Azimuth Adjustment °	3 dB Beam Width °	Elevation ft	Outside Diameter ft	Aperture Area ft²	Weight K
VHLP800-11	C	Paraboloid w/Shroud (HP)	From Leg	3.00 0.00 4.00	0.0000		124.00	2.80	2" Ice 7.64 No Ice 6.16 1/2" Ice 6.53 1" Ice 6.90 2" Ice 7.64	0.17 0.02 0.06 0.09 0.17

**Tower Pressures - No Ice**

$G_H = 1.100$

Section Elevation ft	z ft	K <sub>Z</sub>	q <sub>z</sub> psf	A <sub>G</sub> ft²	F a c e	A <sub>F</sub> ft²	A <sub>R</sub> ft²	A <sub>leg</sub> ft²	Leg %	C <sub>A</sub> A <sub>A</sub> In Face ft²	C <sub>A</sub> A <sub>A</sub> Out Face ft²
L1 169.00-164.00	166.48	1.409	51	6.744	A	0.000	6.744	6.744	100.00	0.000	0.000
					B	0.000	6.744	100.00	0.000	0.000	
					C	0.000	6.744	100.00	0.000	0.000	
L2 164.00-159.00	161.48	1.4	50	7.148	A	0.000	7.148	7.148	100.00	0.000	0.000
					B	0.000	7.148	100.00	0.000	0.000	
					C	0.000	7.148	100.00	0.000	0.000	
L3 159.00-154.00	156.48	1.391	50	7.552	A	0.000	7.552	7.552	100.00	0.000	0.000
					B	0.000	7.552	100.00	0.000	0.000	
					C	0.000	7.552	100.00	0.000	0.000	
L4 154.00-149.00	151.48	1.381	50	7.955	A	0.000	7.955	7.955	100.00	0.000	0.000
					B	0.000	7.955	100.00	0.000	0.000	
					C	0.000	7.955	100.00	0.000	0.000	
L5 149.00-144.00	146.48	1.372	49	8.359	A	0.000	8.359	8.359	100.00	0.000	0.000
					B	0.000	8.359	100.00	0.000	0.000	
					C	0.000	8.359	100.00	0.000	0.000	
L6 144.00-139.00	141.48	1.362	49	8.763	A	0.000	8.763	8.763	100.00	0.000	0.000
					B	0.000	8.763	100.00	0.000	0.000	
					C	0.000	8.763	100.00	0.000	0.000	
L7 139.00-133.33	136.14	1.351	49	10.426	A	0.000	10.426	10.426	100.00	0.000	0.000
					B	0.000	10.426	100.00	5.548	0.000	
					C	0.000	10.426	100.00	0.000	0.000	
L8 133.33-131.66	132.49	1.343	48	3.096	A	0.000	3.096	3.096	100.00	0.000	0.000
					B	0.000	3.096	100.00	1.984	0.000	
					C	0.000	3.096	100.00	0.000	0.000	
L9 131.66-126.66	129.14	1.336	48	9.536	A	0.000	9.536	9.536	100.00	0.000	0.000
					B	0.000	9.536	100.00	5.940	0.000	
					C	0.000	9.536	100.00	0.000	0.000	
L10 126.66-121.66	124.14	1.325	48	9.934	A	0.000	9.934	9.934	100.00	0.000	0.000
					B	0.000	9.934	100.00	5.940	0.000	
					C	0.000	9.934	100.00	1.258	0.000	
L11 121.66-116.66	119.14	1.313	47	10.331	A	0.000	10.331	10.331	100.00	0.000	0.000
					B	0.000	10.331	100.00	6.024	0.000	
					C	0.000	10.331	100.00	2.688	0.000	
L12 116.66-111.66	114.14	1.301	47	10.729	A	0.000	10.729	10.729	100.00	0.000	0.000
					B	0.000	10.729	100.00	6.255	0.000	
					C	0.000	10.729	100.00	2.688	0.000	
L13 111.66-111.00	111.33	1.295	47	1.446	A	0.000	1.446	1.446	100.00	0.000	0.000
					B	0.000	1.446	100.00	0.826	0.000	
					C	0.000	1.446	100.00	0.355	0.000	
L14 111.00-110.75	110.87	1.293	47	0.549	A	0.000	0.549	0.549	100.00	0.446	0.000
					B	0.000	0.549	100.00	0.313	0.000	
					C	0.000	0.549	100.00	0.134	0.000	
L15 110.75-105.75	108.24	1.287	46	11.184	A	0.000	11.184	11.184	100.00	11.190	0.000
					B	0.000	11.184	100.00	8.535	0.000	
					C	0.000	11.184	100.00	4.968	0.000	
L16 105.75-101.50	103.61	1.275	46	9.820	A	0.000	9.820	9.820	100.00	14.783	0.000
					B	0.000	9.820	100.00	12.527	0.000	
					C	0.000	9.820	100.00	9.494	0.000	



Section Elevation ft	z ft	K <sub>Z</sub>	q <sub>z</sub> psf	A <sub>G</sub> ft <sup>2</sup>	F a c e	A <sub>F</sub> ft <sup>2</sup>	A <sub>R</sub> ft <sup>2</sup>	A <sub>leg</sub> ft <sup>2</sup>	Leg %	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>
L17 101.50- 101.25	101.37	1.269	46	0.585	A	0.000	0.585	0.585	100.00	1.007	0.000
					B	0.000	0.585			0.874	0.000
					C	0.000	0.585			0.696	0.000
L18 101.25- 101.00	101.12	1.269	46	0.586	A	0.000	0.586	0.586	100.00	1.007	0.000
					B	0.000	0.586			0.874	0.000
					C	0.000	0.586			0.696	0.000
L19 101.00- 100.75	100.87	1.268	46	0.588	A	0.000	0.588	0.588	100.00	1.007	0.000
					B	0.000	0.588			0.874	0.000
					C	0.000	0.588			0.696	0.000
L20 100.75- 95.75	98.24	1.261	45	11.970	A	0.000	11.970	11.970	100.00	17.857	0.000
					B	0.000	11.970			15.202	0.000
					C	0.000	11.970			11.634	0.000
L21 95.75- 87.83	91.76	1.243	45	19.776	A	0.000	19.776	19.776	100.00	26.301	0.000
					B	0.000	19.776			22.095	0.000
					C	0.000	19.776			16.445	0.000
L22 87.83- 86.83	87.33	1.23	44	2.512	A	0.000	2.512	2.512	100.00	3.865	0.000
					B	0.000	2.512			3.334	0.000
					C	0.000	2.512			2.621	0.000
L23 86.83- 81.83	84.32	1.221	44	12.800	A	0.000	12.800	12.800	100.00	19.327	0.000
					B	0.000	12.800			16.672	0.000
					C	0.000	12.800			13.104	0.000
L24 81.83- 81.50	81.66	1.213	44	0.859	A	0.000	0.859	0.859	100.00	1.526	0.000
					B	0.000	0.859			1.350	0.000
					C	0.000	0.859			1.115	0.000
L25 81.50- 81.25	81.37	1.212	44	0.652	A	0.000	0.652	0.652	100.00	1.175	0.000
					B	0.000	0.652			1.042	0.000
					C	0.000	0.652			0.864	0.000
L26 81.25- 76.25	78.74	1.204	43	13.244	A	0.000	13.244	13.244	100.00	20.681	0.000
					B	0.000	13.244			18.026	0.000
					C	0.000	13.244			14.458	0.000
L27 76.25- 71.25	73.74	1.187	43	13.644	A	0.000	13.644	13.644	100.00	19.743	0.000
					B	0.000	13.644			17.088	0.000
					C	0.000	13.644			13.521	0.000
L28 71.25- 66.25	68.74	1.17	42	14.044	A	0.000	14.044	14.044	100.00	19.743	0.000
					B	0.000	14.044			17.088	0.000
					C	0.000	14.044			13.521	0.000
L29 66.25- 61.25	63.74	1.151	41	14.443	A	0.000	14.443	14.443	100.00	19.743	0.000
					B	0.000	14.443			17.088	0.000
					C	0.000	14.443			13.521	0.000
L30 61.25- 56.25	58.74	1.132	41	14.842	A	0.000	14.842	14.842	100.00	19.743	0.000
					B	0.000	14.842			17.088	0.000
					C	0.000	14.842			13.521	0.000
L31 56.25- 51.25	53.74	1.111	40	15.241	A	0.000	15.241	15.241	100.00	19.743	0.000
					B	0.000	15.241			17.088	0.000
					C	0.000	15.241			13.521	0.000
L32 51.25- 43.33	47.26	1.081	39	24.957	A	0.000	24.957	24.957	100.00	37.680	0.000
					B	0.000	24.957			30.271	0.000
					C	0.000	24.957			24.620	0.000
L33 43.33- 42.33	42.83	1.059	38	3.156	A	0.000	3.156	3.156	100.00	5.949	0.000
					B	0.000	3.156			4.418	0.000
					C	0.000	3.156			3.704	0.000
L34 42.33- 37.40	39.85	1.043	38	15.791	A	0.000	15.791	15.791	100.00	29.327	0.000
					B	0.000	15.791			21.779	0.000
					C	0.000	15.791			18.262	0.000
L35 37.40- 37.15	37.27	1.028	37	0.811	A	0.000	0.811	0.811	100.00	1.487	0.000
					B	0.000	0.811			1.104	0.000
					C	0.000	0.811			0.926	0.000
L36 37.15- 32.15	34.64	1.012	36	16.432	A	0.000	16.432	16.432	100.00	29.743	0.000
					B	0.000	16.432			22.088	0.000
					C	0.000	16.432			18.521	0.000
L37 32.15- 27.15	29.64	0.98	35	16.831	A	0.000	16.831	16.831	100.00	29.743	0.000
					B	0.000	16.831			22.088	0.000
					C	0.000	16.831			18.521	0.000
L38 27.15-	24.64	0.942	34	17.229	A	0.000	17.229	17.229	100.00	29.760	0.000

Section Elevation ft	z ft	K <sub>Z</sub>	q <sub>z</sub> psf	A <sub>G</sub> ft <sup>2</sup>	F a c e	A <sub>F</sub> ft <sup>2</sup>	A <sub>R</sub> ft <sup>2</sup>	A <sub>leg</sub> ft <sup>2</sup>	Leg %	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>
22.15					B	0.000	17.229		100.00	22.097	0.000
					C	0.000	17.229		100.00	18.529	0.000
L39 22.15-19.50	20.82	0.91	33	9.293	A	0.000	9.293	9.293	100.00	16.206	0.000
					B	0.000	9.293		100.00	11.928	0.000
					C	0.000	9.293		100.00	10.037	0.000
L40 19.50-19.25	19.37	0.896	32	0.882	A	0.000	0.882	0.882	100.00	1.529	0.000
					B	0.000	0.882		100.00	1.125	0.000
					C	0.000	0.882		100.00	0.947	0.000
L41 19.25-14.25	16.74	0.869	31	17.855	A	0.000	17.855	17.855	100.00	30.577	0.000
					B	0.000	17.855		100.00	22.505	0.000
					C	0.000	17.855		100.00	18.938	0.000
L42 14.25-9.25	11.74	0.85	31	18.252	A	0.000	18.252	18.252	100.00	30.577	0.000
					B	0.000	18.252		100.00	22.505	0.000
					C	0.000	18.252		100.00	18.938	0.000
L43 9.25-9.00	9.12	0.85	31	0.923	A	0.000	0.923	0.923	100.00	1.529	0.000
					B	0.000	0.923		100.00	1.125	0.000
					C	0.000	0.923		100.00	0.947	0.000
L44 9.00-8.75	8.87	0.85	31	0.924	A	0.000	0.924	0.924	100.00	1.529	0.000
					B	0.000	0.924		100.00	1.125	0.000
					C	0.000	0.924		100.00	0.947	0.000
L45 8.75-7.00	7.87	0.85	31	6.496	A	0.000	6.496	6.496	100.00	10.702	0.000
					B	0.000	6.496		100.00	7.877	0.000
					C	0.000	6.496		100.00	6.628	0.000
L46 7.00-6.75	6.87	0.85	31	0.932	A	0.000	0.932	0.932	100.00	1.529	0.000
					B	0.000	0.932		100.00	1.125	0.000
					C	0.000	0.932		100.00	0.947	0.000
L47 6.75-5.00	5.87	0.85	31	6.552	A	0.000	6.552	6.552	100.00	10.702	0.000
					B	0.000	6.552		100.00	7.877	0.000
					C	0.000	6.552		100.00	6.628	0.000
L48 5.00-4.75	4.87	0.85	31	0.939	A	0.000	0.939	0.939	100.00	1.529	0.000
					B	0.000	0.939		100.00	1.125	0.000
					C	0.000	0.939		100.00	0.947	0.000
L49 4.75-3.00	3.87	0.85	31	6.598	A	0.000	6.598	6.598	100.00	10.702	0.000
					B	0.000	6.598		100.00	7.877	0.000
					C	0.000	6.598		100.00	6.628	0.000
L50 3.00-2.75	2.87	0.85	31	0.946	A	0.000	0.946	0.946	100.00	1.529	0.000
					B	0.000	0.946		100.00	1.125	0.000
					C	0.000	0.946		100.00	0.947	0.000
L51 2.75-2.25	2.50	0.85	31	1.896	A	0.000	1.896	1.896	100.00	3.058	0.000
					B	0.000	1.896		100.00	2.251	0.000
					C	0.000	1.896		100.00	1.894	0.000
L52 2.25-2.00	2.12	0.85	31	0.950	A	0.000	0.950	0.950	100.00	1.529	0.000
					B	0.000	0.950		100.00	1.125	0.000
					C	0.000	0.950		100.00	0.947	0.000
L53 2.00-0.00	1.00	0.85	31	7.638	A	0.000	7.638	7.638	100.00	12.231	0.000
					B	0.000	7.638		100.00	9.002	0.000
					C	0.000	7.638		100.00	7.575	0.000

**Tower Pressure - With Ice**

**G<sub>H</sub> = 1.100**

Section Elevation ft	z ft	K <sub>Z</sub>	q <sub>z</sub> psf	t <sub>z</sub> in	A <sub>G</sub> ft <sup>2</sup>	F a c e	A <sub>F</sub> ft <sup>2</sup>	A <sub>R</sub> ft <sup>2</sup>	A <sub>leg</sub> ft <sup>2</sup>	Leg %	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>
L1 169.00-164.00	166.48	1.409	8	1.9986	8.409	A	0.000	8.409	8.409	100.00	0.000	0.000
						B	0.000	8.409		100.00	0.000	0.000
						C	0.000	8.409		100.00	0.000	0.000
L2 164.00-159.00	161.48	1.4	8	1.9925	8.808	A	0.000	8.808	8.808	100.00	0.000	0.000
						B	0.000	8.808		100.00	0.000	0.000
						C	0.000	8.808		100.00	0.000	0.000
L3 159.00-	156.48	1.391	8	1.9863	9.207	A	0.000	9.207	9.207	100.00	0.000	0.000

Section Elevation ft	z ft	K <sub>z</sub>	q <sub>z</sub> psf	t <sub>z</sub> in	A <sub>G</sub> ft <sup>2</sup>	F a c e	A <sub>F</sub> ft <sup>2</sup>	A <sub>R</sub> ft <sup>2</sup>	A <sub>leg</sub> ft <sup>2</sup>	Leg %	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>
154.00						B	0.000	9.207		100.00	0.000	0.000
						C	0.000	9.207		100.00	0.000	0.000
L4 154.00- 149.00	151.48	1.381	8	1.9799	9.605	A	0.000	9.605	9.605	100.00	0.000	0.000
						B	0.000	9.605		100.00	0.000	0.000
						C	0.000	9.605		100.00	0.000	0.000
L5 149.00- 144.00	146.48	1.372	8	1.9732	10.004	A	0.000	10.004	10.004	100.00	0.000	0.000
						B	0.000	10.004		100.00	0.000	0.000
						C	0.000	10.004		100.00	0.000	0.000
L6 144.00- 139.00	141.48	1.362	8	1.9664	10.402	A	0.000	10.402	10.402	100.00	0.000	0.000
						B	0.000	10.402		100.00	0.000	0.000
						C	0.000	10.402		100.00	0.000	0.000
L7 139.00- 133.33	136.14	1.351	8	1.9588	12.277	A	0.000	12.277	12.277	100.00	0.000	0.000
						B	0.000	12.277		100.00	9.222	0.000
						C	0.000	12.277		100.00	0.000	0.000
L8 133.33- 131.66	132.49	1.343	8	1.9535	3.641	A	0.000	3.641	3.641	100.00	0.000	0.000
						B	0.000	3.641		100.00	3.298	0.000
						C	0.000	3.641		100.00	0.000	0.000
L9 131.66- 126.66	129.14	1.336	8	1.9485	11.159	A	0.000	11.159	11.159	100.00	0.000	0.000
						B	0.000	11.159		100.00	9.861	0.000
						C	0.000	11.159		100.00	0.000	0.000
L10 126.66- 121.66	124.14	1.325	8	1.9408	11.551	A	0.000	11.551	11.551	100.00	0.000	0.000
						B	0.000	11.551		100.00	9.851	0.000
						C	0.000	11.551		100.00	3.579	0.000
L11 121.66- 116.66	119.14	1.313	8	1.9329	11.942	A	0.000	11.942	11.942	100.00	0.000	0.000
						B	0.000	11.942		100.00	10.444	0.000
						C	0.000	11.942		100.00	7.630	0.000
L12 116.66- 111.66	114.14	1.301	7	1.9246	12.333	A	0.000	12.333	12.333	100.00	0.000	0.000
						B	0.000	12.333		100.00	12.070	0.000
						C	0.000	12.333		100.00	7.612	0.000
L13 111.66- 111.00	111.33	1.295	7	1.9198	1.657	A	0.000	1.657	1.657	100.00	0.000	0.000
						B	0.000	1.657		100.00	1.592	0.000
						C	0.000	1.657		100.00	1.003	0.000
L14 111.00- 110.75	110.87	1.293	7	1.9190	0.629	A	0.000	0.629	0.629	100.00	0.677	0.000
						B	0.000	0.629		100.00	0.603	0.000
						C	0.000	0.629		100.00	0.380	0.000
L15 110.75- 105.75	108.24	1.287	7	1.9144	12.779	A	0.000	12.779	12.779	100.00	16.316	0.000
						B	0.000	12.779		100.00	14.833	0.000
						C	0.000	12.779		100.00	10.374	0.000
L16 105.75- 101.50	103.61	1.275	7	1.9061	11.170	A	0.000	11.170	11.170	100.00	21.463	0.000
						B	0.000	11.170		100.00	20.195	0.000
						C	0.000	11.170		100.00	16.405	0.000
L17 101.50- 101.25	101.37	1.269	7	1.9019	0.664	A	0.000	0.664	0.664	100.00	1.477	0.000
						B	0.000	0.664		100.00	1.403	0.000
						C	0.000	0.664		100.00	1.180	0.000
L18 101.25- 101.00	101.12	1.269	7	1.9014	0.665	A	0.000	0.665	0.665	100.00	1.477	0.000
						B	0.000	0.665		100.00	1.403	0.000
						C	0.000	0.665		100.00	1.180	0.000
L19 101.00- 100.75	100.87	1.268	7	1.9010	0.667	A	0.000	0.667	0.667	100.00	1.477	0.000
						B	0.000	0.667		100.00	1.402	0.000
						C	0.000	0.667		100.00	1.180	0.000
L20 100.75- 95.75	98.24	1.261	7	1.8959	13.550	A	0.000	13.550	13.550	100.00	26.746	0.000
						B	0.000	13.550		100.00	25.245	0.000
						C	0.000	13.550		100.00	20.786	0.000
L21 95.75- 87.83	91.76	1.243	7	1.8830	22.262	A	0.000	22.262	22.262	100.00	39.974	0.000
						B	0.000	22.262		100.00	37.575	0.000
						C	0.000	22.262		100.00	30.513	0.000
L22 87.83- 86.83	87.33	1.23	7	1.8738	2.826	A	0.000	2.826	2.826	100.00	5.743	0.000
						B	0.000	2.826		100.00	5.440	0.000
						C	0.000	2.826		100.00	4.549	0.000
L23 86.83- 81.83	84.32	1.221	7	1.8672	14.356	A	0.000	14.356	14.356	100.00	28.654	0.000
						B	0.000	14.356		100.00	27.124	0.000
						C	0.000	14.356		100.00	22.665	0.000
L24 81.83- 81.50	81.66	1.213	7	1.8612	0.961	A	0.000	0.961	0.961	100.00	2.140	0.000
						B	0.000	0.961		100.00	2.038	0.000

Section Elevation ft	z ft	K <sub>z</sub>	q <sub>z</sub> psf	t <sub>z</sub> in	A <sub>G</sub> ft <sup>2</sup>	F a c e	A <sub>F</sub> ft <sup>2</sup>	A <sub>R</sub> ft <sup>2</sup>	A <sub>leg</sub> ft <sup>2</sup>	Leg %	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>
L25 81.50-81.25	81.37	1.212	7	1.8606	0.729	C	0.000	0.961	0.729	100.00	1.744	0.000
						A	0.000	0.729		100.00	1.640	0.000
						B	0.000	0.729		100.00	1.563	0.000
L26 81.25-76.25	78.74	1.204	7	1.8545	14.790	C	0.000	0.729	14.790	100.00	1.340	0.000
						A	0.000	14.790		100.00	29.192	0.000
						B	0.000	14.790		100.00	27.648	0.000
L27 76.25-71.25	73.74	1.187	7	1.8423	15.179	C	0.000	14.790	15.179	100.00	23.190	0.000
						A	0.000	15.179		100.00	27.958	0.000
						B	0.000	15.179		100.00	26.403	0.000
L28 71.25-66.25	68.74	1.17	7	1.8294	15.568	C	0.000	15.179	15.568	100.00	21.944	0.000
						A	0.000	15.568		100.00	27.917	0.000
						B	0.000	15.568		100.00	26.348	0.000
L29 66.25-61.25	63.74	1.151	7	1.8157	15.956	C	0.000	15.568	15.956	100.00	21.890	0.000
						A	0.000	15.956		100.00	27.872	0.000
						B	0.000	15.956		100.00	26.290	0.000
L30 61.25-56.25	58.74	1.132	7	1.8009	16.342	C	0.000	15.956	16.342	100.00	21.831	0.000
						A	0.000	16.342		100.00	27.824	0.000
						B	0.000	16.342		100.00	26.227	0.000
L31 56.25-51.25	53.74	1.111	6	1.7850	16.729	C	0.000	16.342	16.729	100.00	21.768	0.000
						A	0.000	16.729		100.00	27.772	0.000
						B	0.000	16.729		100.00	26.159	0.000
L32 51.25-43.33	47.26	1.081	6	1.7622	27.283	C	0.000	16.729	27.283	100.00	21.701	0.000
						A	0.000	27.283		100.00	52.369	0.000
						B	0.000	27.283		100.00	45.531	0.000
L33 43.33-42.33	42.83	1.059	6	1.7449	3.450	C	0.000	27.283	3.450	100.00	38.468	0.000
						A	0.000	3.450		100.00	8.244	0.000
						B	0.000	3.450		100.00	6.565	0.000
L34 42.33-37.40	39.85	1.043	6	1.7324	17.215	C	0.000	3.450	17.215	100.00	5.673	0.000
						A	0.000	17.215		100.00	40.491	0.000
						B	0.000	17.215		100.00	32.211	0.000
L35 37.40-37.15	37.27	1.028	6	1.7208	0.883	C	0.000	17.215	0.883	100.00	27.815	0.000
						A	0.000	0.883		100.00	2.050	0.000
						B	0.000	0.883		100.00	1.630	0.000
L36 37.15-32.15	34.64	1.012	6	1.7083	17.855	C	0.000	0.883	17.855	100.00	1.407	0.000
						A	0.000	17.855		100.00	40.939	0.000
						B	0.000	17.855		100.00	32.542	0.000
L37 32.15-27.15	29.64	0.98	6	1.6818	18.233	C	0.000	17.855	18.233	100.00	28.083	0.000
						A	0.000	18.233		100.00	40.801	0.000
						B	0.000	18.233		100.00	32.403	0.000
L38 27.15-22.15	24.64	0.942	5	1.6511	18.605	C	0.000	18.233	18.605	100.00	27.944	0.000
						A	0.000	18.605		100.00	40.656	0.000
						B	0.000	18.605		100.00	32.250	0.000
L39 22.15-19.50	20.82	0.91	5	1.6235	10.010	C	0.000	18.605	10.010	100.00	27.791	0.000
						A	0.000	10.010		100.00	21.904	0.000
						B	0.000	10.010		100.00	17.232	0.000
L40 19.50-19.25	19.37	0.896	5	1.6118	0.949	C	0.000	10.010	0.949	100.00	14.869	0.000
						A	0.000	0.949		100.00	2.063	0.000
						B	0.000	0.949		100.00	1.623	0.000
L41 19.25-14.25	16.74	0.869	5	1.5885	19.179	C	0.000	0.949	19.179	100.00	1.400	0.000
						A	0.000	19.179		100.00	41.144	0.000
						B	0.000	19.179		100.00	32.329	0.000
L42 14.25-9.25	11.74	0.85	5	1.5331	19.530	C	0.000	19.179	19.530	100.00	27.871	0.000
						A	0.000	19.530		100.00	40.853	0.000
						B	0.000	19.530		100.00	32.039	0.000
L43 9.25-9.00	9.12	0.85	5	1.4949	0.985	C	0.000	19.530	0.985	100.00	27.580	0.000
						A	0.000	0.985		100.00	2.033	0.000
						B	0.000	0.985		100.00	1.592	0.000
L44 9.00-8.75	8.87	0.85	5	1.4908	0.986	C	0.000	0.985	0.986	100.00	1.369	0.000
						A	0.000	0.986		100.00	2.032	0.000
						B	0.000	0.986		100.00	1.591	0.000
L45 8.75-7.00	7.87	0.85	5	1.4730	6.925	C	0.000	0.986	6.925	100.00	1.368	0.000
						A	0.000	6.925		100.00	14.188	0.000
						B	0.000	6.925		100.00	11.103	0.000
						C	0.000	6.925		100.00	9.543	0.000

Section Elevation ft	z ft	K <sub>Z</sub>	q <sub>Z</sub> psf	t <sub>Z</sub> in	A <sub>G</sub> ft <sup>2</sup>	F a c e	A <sub>F</sub> ft <sup>2</sup>	A <sub>R</sub> ft <sup>2</sup>	A <sub>leg</sub> ft <sup>2</sup>	Leg %	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>
L46 7.00-6.75	6.87	0.85	5	1.4532	0.993	A	0.000	0.993	0.993	100.00	2.022	0.000
						B	0.000	0.993		100.00	1.581	0.000
						C	0.000	0.993		100.00	1.358	0.000
L47 6.75-5.00	5.87	0.85	5	1.4305	6.970	A	0.000	6.970	6.970	100.00	14.110	0.000
						B	0.000	6.970		100.00	11.025	0.000
						C	0.000	6.970		100.00	9.464	0.000
L48 5.00-4.75	4.87	0.85	5	1.4041	0.997	A	0.000	0.997	0.997	100.00	2.009	0.000
						B	0.000	0.997		100.00	1.568	0.000
						C	0.000	0.997		100.00	1.345	0.000
L49 4.75-3.00	3.87	0.85	5	1.3722	6.998	A	0.000	6.998	6.998	100.00	14.003	0.000
						B	0.000	6.998		100.00	10.918	0.000
						C	0.000	6.998		100.00	9.357	0.000
L50 3.00-2.75	2.87	0.85	5	1.3319	1.002	A	0.000	1.002	1.002	100.00	1.990	0.000
						B	0.000	1.002		100.00	1.549	0.000
						C	0.000	1.002		100.00	1.326	0.000
L51 2.75-2.25	2.50	0.85	5	1.3134	2.005	A	0.000	2.005	2.005	100.00	3.970	0.000
						B	0.000	2.005		100.00	3.089	0.000
						C	0.000	2.005		100.00	2.643	0.000
L52 2.25-2.00	2.12	0.85	5	1.2922	1.004	A	0.000	1.004	1.004	100.00	1.979	0.000
						B	0.000	1.004		100.00	1.539	0.000
						C	0.000	1.004		100.00	1.316	0.000
L53 2.00-0.00	1.00	0.85	5	1.1982	8.038	A	0.000	8.038	8.038	100.00	15.638	0.000
						B	0.000	8.038		100.00	12.112	0.000
						C	0.000	8.038		100.00	10.329	0.000

**Tower Pressure - Service**

*G<sub>H</sub> = 1.100*

Section Elevation ft	z ft	K <sub>Z</sub>	q <sub>Z</sub> psf	A <sub>G</sub> ft <sup>2</sup>	F a c e	A <sub>F</sub> ft <sup>2</sup>	A <sub>R</sub> ft <sup>2</sup>	A <sub>leg</sub> ft <sup>2</sup>	Leg %	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>
L1 169.00-164.00	166.48	1.409	11	6.744	A	0.000	6.744	6.744	100.00	0.000	0.000
					B	0.000	6.744		100.00	0.000	0.000
					C	0.000	6.744		100.00	0.000	0.000
L2 164.00-159.00	161.48	1.4	11	7.148	A	0.000	7.148	7.148	100.00	0.000	0.000
					B	0.000	7.148		100.00	0.000	0.000
					C	0.000	7.148		100.00	0.000	0.000
L3 159.00-154.00	156.48	1.391	11	7.552	A	0.000	7.552	7.552	100.00	0.000	0.000
					B	0.000	7.552		100.00	0.000	0.000
					C	0.000	7.552		100.00	0.000	0.000
L4 154.00-149.00	151.48	1.381	11	7.955	A	0.000	7.955	7.955	100.00	0.000	0.000
					B	0.000	7.955		100.00	0.000	0.000
					C	0.000	7.955		100.00	0.000	0.000
L5 149.00-144.00	146.48	1.372	11	8.359	A	0.000	8.359	8.359	100.00	0.000	0.000
					B	0.000	8.359		100.00	0.000	0.000
					C	0.000	8.359		100.00	0.000	0.000
L6 144.00-139.00	141.48	1.362	11	8.763	A	0.000	8.763	8.763	100.00	0.000	0.000
					B	0.000	8.763		100.00	0.000	0.000
					C	0.000	8.763		100.00	0.000	0.000
L7 139.00-133.33	136.14	1.351	11	10.426	A	0.000	10.426	10.426	100.00	0.000	0.000
					B	0.000	10.426		100.00	5.548	0.000
					C	0.000	10.426		100.00	0.000	0.000
L8 133.33-131.66	132.49	1.343	10	3.096	A	0.000	3.096	3.096	100.00	0.000	0.000
					B	0.000	3.096		100.00	1.984	0.000
					C	0.000	3.096		100.00	0.000	0.000
L9 131.66-126.66	129.14	1.336	10	9.536	A	0.000	9.536	9.536	100.00	0.000	0.000
					B	0.000	9.536		100.00	5.940	0.000
					C	0.000	9.536		100.00	0.000	0.000
L10 126.66-121.66	124.14	1.325	10	9.934	A	0.000	9.934	9.934	100.00	0.000	0.000
					B	0.000	9.934		100.00	5.940	0.000
					C	0.000	9.934		100.00	1.258	0.000

Section Elevation ft	z ft	K <sub>Z</sub>	q <sub>z</sub> psf	A <sub>G</sub> ft <sup>2</sup>	F a c e	A <sub>F</sub> ft <sup>2</sup>	A <sub>R</sub> ft <sup>2</sup>	A <sub>leg</sub> ft <sup>2</sup>	Leg %	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>
L11 121.66- 116.66	119.14	1.313	10	10.331	A	0.000	10.331	10.331	100.00	0.000	0.000
					B	0.000	10.331		100.00	6.024	0.000
					C	0.000	10.331		100.00	2.688	0.000
L12 116.66- 111.66	114.14	1.301	10	10.729	A	0.000	10.729	10.729	100.00	0.000	0.000
					B	0.000	10.729		100.00	6.255	0.000
					C	0.000	10.729		100.00	2.688	0.000
L13 111.66- 111.00	111.33	1.295	10	1.446	A	0.000	1.446	1.446	100.00	0.000	0.000
					B	0.000	1.446		100.00	0.826	0.000
					C	0.000	1.446		100.00	0.355	0.000
L14 111.00- 110.75	110.87	1.293	10	0.549	A	0.000	0.549	0.549	100.00	0.446	0.000
					B	0.000	0.549		100.00	0.313	0.000
					C	0.000	0.549		100.00	0.134	0.000
L15 110.75- 105.75	108.24	1.287	10	11.184	A	0.000	11.184	11.184	100.00	11.190	0.000
					B	0.000	11.184		100.00	8.535	0.000
					C	0.000	11.184		100.00	4.968	0.000
L16 105.75- 101.50	103.61	1.275	10	9.820	A	0.000	9.820	9.820	100.00	14.783	0.000
					B	0.000	9.820		100.00	12.527	0.000
					C	0.000	9.820		100.00	9.494	0.000
L17 101.50- 101.25	101.37	1.269	10	0.585	A	0.000	0.585	0.585	100.00	1.007	0.000
					B	0.000	0.585		100.00	0.874	0.000
					C	0.000	0.585		100.00	0.696	0.000
L18 101.25- 101.00	101.12	1.269	10	0.586	A	0.000	0.586	0.586	100.00	1.007	0.000
					B	0.000	0.586		100.00	0.874	0.000
					C	0.000	0.586		100.00	0.696	0.000
L19 101.00- 100.75	100.87	1.268	10	0.588	A	0.000	0.588	0.588	100.00	1.007	0.000
					B	0.000	0.588		100.00	0.874	0.000
					C	0.000	0.588		100.00	0.696	0.000
L20 100.75- 95.75	98.24	1.261	10	11.970	A	0.000	11.970	11.970	100.00	17.857	0.000
					B	0.000	11.970		100.00	15.202	0.000
					C	0.000	11.970		100.00	11.634	0.000
L21 95.75- 87.83	91.76	1.243	10	19.776	A	0.000	19.776	19.776	100.00	26.301	0.000
					B	0.000	19.776		100.00	22.095	0.000
					C	0.000	19.776		100.00	16.445	0.000
L22 87.83- 86.83	87.33	1.23	10	2.512	A	0.000	2.512	2.512	100.00	3.865	0.000
					B	0.000	2.512		100.00	3.334	0.000
					C	0.000	2.512		100.00	2.621	0.000
L23 86.83- 81.83	84.32	1.221	10	12.800	A	0.000	12.800	12.800	100.00	19.327	0.000
					B	0.000	12.800		100.00	16.672	0.000
					C	0.000	12.800		100.00	13.104	0.000
L24 81.83- 81.50	81.66	1.213	9	0.859	A	0.000	0.859	0.859	100.00	1.526	0.000
					B	0.000	0.859		100.00	1.350	0.000
					C	0.000	0.859		100.00	1.115	0.000
L25 81.50- 81.25	81.37	1.212	9	0.652	A	0.000	0.652	0.652	100.00	1.175	0.000
					B	0.000	0.652		100.00	1.042	0.000
					C	0.000	0.652		100.00	0.864	0.000
L26 81.25- 76.25	78.74	1.204	9	13.244	A	0.000	13.244	13.244	100.00	20.681	0.000
					B	0.000	13.244		100.00	18.026	0.000
					C	0.000	13.244		100.00	14.458	0.000
L27 76.25- 71.25	73.74	1.187	9	13.644	A	0.000	13.644	13.644	100.00	19.743	0.000
					B	0.000	13.644		100.00	17.088	0.000
					C	0.000	13.644		100.00	13.521	0.000
L28 71.25- 66.25	68.74	1.17	9	14.044	A	0.000	14.044	14.044	100.00	19.743	0.000
					B	0.000	14.044		100.00	17.088	0.000
					C	0.000	14.044		100.00	13.521	0.000
L29 66.25- 61.25	63.74	1.151	9	14.443	A	0.000	14.443	14.443	100.00	19.743	0.000
					B	0.000	14.443		100.00	17.088	0.000
					C	0.000	14.443		100.00	13.521	0.000
L30 61.25- 56.25	58.74	1.132	9	14.842	A	0.000	14.842	14.842	100.00	19.743	0.000
					B	0.000	14.842		100.00	17.088	0.000
					C	0.000	14.842		100.00	13.521	0.000
L31 56.25- 51.25	53.74	1.111	9	15.241	A	0.000	15.241	15.241	100.00	19.743	0.000
					B	0.000	15.241		100.00	17.088	0.000
					C	0.000	15.241		100.00	13.521	0.000
L32 51.25-	47.26	1.081	8	24.957	A	0.000	24.957	24.957	100.00	37.680	0.000

Section Elevation ft	z ft	K <sub>Z</sub>	q <sub>z</sub> psf	A <sub>G</sub> ft <sup>2</sup>	F a c e	A <sub>F</sub> ft <sup>2</sup>	A <sub>R</sub> ft <sup>2</sup>	A <sub>leg</sub> ft <sup>2</sup>	Leg %	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>
43.33					B	0.000	24.957		100.00	30.271	0.000
					C	0.000	24.957		100.00	24.620	0.000
L33 43.33-	42.83	1.059	8	3.156	A	0.000	3.156	3.156	100.00	5.949	0.000
42.33					B	0.000	3.156		100.00	4.418	0.000
					C	0.000	3.156		100.00	3.704	0.000
L34 42.33-	39.85	1.043	8	15.791	A	0.000	15.791	15.791	100.00	29.327	0.000
37.40					B	0.000	15.791		100.00	21.779	0.000
					C	0.000	15.791		100.00	18.262	0.000
L35 37.40-	37.27	1.028	8	0.811	A	0.000	0.811	0.811	100.00	1.487	0.000
37.15					B	0.000	0.811		100.00	1.104	0.000
					C	0.000	0.811		100.00	0.926	0.000
L36 37.15-	34.64	1.012	8	16.432	A	0.000	16.432	16.432	100.00	29.743	0.000
32.15					B	0.000	16.432		100.00	22.088	0.000
					C	0.000	16.432		100.00	18.521	0.000
L37 32.15-	29.64	0.98	8	16.831	A	0.000	16.831	16.831	100.00	29.743	0.000
27.15					B	0.000	16.831		100.00	22.088	0.000
					C	0.000	16.831		100.00	18.521	0.000
L38 27.15-	24.64	0.942	7	17.229	A	0.000	17.229	17.229	100.00	29.760	0.000
22.15					B	0.000	17.229		100.00	22.097	0.000
					C	0.000	17.229		100.00	18.529	0.000
L39 22.15-	20.82	0.91	7	9.293	A	0.000	9.293	9.293	100.00	16.206	0.000
19.50					B	0.000	9.293		100.00	11.928	0.000
					C	0.000	9.293		100.00	10.037	0.000
L40 19.50-	19.37	0.896	7	0.882	A	0.000	0.882	0.882	100.00	1.529	0.000
19.25					B	0.000	0.882		100.00	1.125	0.000
					C	0.000	0.882		100.00	0.947	0.000
L41 19.25-	16.74	0.869	7	17.855	A	0.000	17.855	17.855	100.00	30.577	0.000
14.25					B	0.000	17.855		100.00	22.505	0.000
					C	0.000	17.855		100.00	18.938	0.000
L42 14.25-	11.74	0.85	7	18.252	A	0.000	18.252	18.252	100.00	30.577	0.000
9.25					B	0.000	18.252		100.00	22.505	0.000
					C	0.000	18.252		100.00	18.938	0.000
L43 9.25-9.00	9.12	0.85	7	0.923	A	0.000	0.923	0.923	100.00	1.529	0.000
					B	0.000	0.923		100.00	1.125	0.000
					C	0.000	0.923		100.00	0.947	0.000
L44 9.00-8.75	8.87	0.85	7	0.924	A	0.000	0.924	0.924	100.00	1.529	0.000
					B	0.000	0.924		100.00	1.125	0.000
					C	0.000	0.924		100.00	0.947	0.000
L45 8.75-7.00	7.87	0.85	7	6.496	A	0.000	6.496	6.496	100.00	10.702	0.000
					B	0.000	6.496		100.00	7.877	0.000
					C	0.000	6.496		100.00	6.628	0.000
L46 7.00-6.75	6.87	0.85	7	0.932	A	0.000	0.932	0.932	100.00	1.529	0.000
					B	0.000	0.932		100.00	1.125	0.000
					C	0.000	0.932		100.00	0.947	0.000
L47 6.75-5.00	5.87	0.85	7	6.552	A	0.000	6.552	6.552	100.00	10.702	0.000
					B	0.000	6.552		100.00	7.877	0.000
					C	0.000	6.552		100.00	6.628	0.000
L48 5.00-4.75	4.87	0.85	7	0.939	A	0.000	0.939	0.939	100.00	1.529	0.000
					B	0.000	0.939		100.00	1.125	0.000
					C	0.000	0.939		100.00	0.947	0.000
L49 4.75-3.00	3.87	0.85	7	6.598	A	0.000	6.598	6.598	100.00	10.702	0.000
					B	0.000	6.598		100.00	7.877	0.000
					C	0.000	6.598		100.00	6.628	0.000
L50 3.00-2.75	2.87	0.85	7	0.946	A	0.000	0.946	0.946	100.00	1.529	0.000
					B	0.000	0.946		100.00	1.125	0.000
					C	0.000	0.946		100.00	0.947	0.000
L51 2.75-2.25	2.50	0.85	7	1.896	A	0.000	1.896	1.896	100.00	3.058	0.000
					B	0.000	1.896		100.00	2.251	0.000
					C	0.000	1.896		100.00	1.894	0.000
L52 2.25-2.00	2.12	0.85	7	0.950	A	0.000	0.950	0.950	100.00	1.529	0.000
					B	0.000	0.950		100.00	1.125	0.000
					C	0.000	0.950		100.00	0.947	0.000
L53 2.00-0.00	1.00	0.85	7	7.638	A	0.000	7.638	7.638	100.00	12.231	0.000

Section Elevation ft	z ft	$K_z$	$q_z$ psf	$A_G$ ft <sup>2</sup>	F a c e	$A_F$ ft <sup>2</sup>	$A_R$ ft <sup>2</sup>	$A_{leg}$ ft <sup>2</sup>	Leg %	$C_A A_A$ In Face ft <sup>2</sup>	$C_A A_A$ Out Face ft <sup>2</sup>
					B	0.000	7.638		100.00	9.002	0.000
					C	0.000	7.638		100.00	7.575	0.000

## Load Combinations

Comb. No.	Description
1	Dead Only
2	1.2 Dead+1.0 Wind 0 deg - No Ice
3	0.9 Dead+1.0 Wind 0 deg - No Ice
4	1.2 Dead+1.0 Wind 30 deg - No Ice
5	0.9 Dead+1.0 Wind 30 deg - No Ice
6	1.2 Dead+1.0 Wind 60 deg - No Ice
7	0.9 Dead+1.0 Wind 60 deg - No Ice
8	1.2 Dead+1.0 Wind 90 deg - No Ice
9	0.9 Dead+1.0 Wind 90 deg - No Ice
10	1.2 Dead+1.0 Wind 120 deg - No Ice
11	0.9 Dead+1.0 Wind 120 deg - No Ice
12	1.2 Dead+1.0 Wind 150 deg - No Ice
13	0.9 Dead+1.0 Wind 150 deg - No Ice
14	1.2 Dead+1.0 Wind 180 deg - No Ice
15	0.9 Dead+1.0 Wind 180 deg - No Ice
16	1.2 Dead+1.0 Wind 210 deg - No Ice
17	0.9 Dead+1.0 Wind 210 deg - No Ice
18	1.2 Dead+1.0 Wind 240 deg - No Ice
19	0.9 Dead+1.0 Wind 240 deg - No Ice
20	1.2 Dead+1.0 Wind 270 deg - No Ice
21	0.9 Dead+1.0 Wind 270 deg - No Ice
22	1.2 Dead+1.0 Wind 300 deg - No Ice
23	0.9 Dead+1.0 Wind 300 deg - No Ice
24	1.2 Dead+1.0 Wind 330 deg - No Ice
25	0.9 Dead+1.0 Wind 330 deg - No Ice
26	1.2 Dead+1.0 Ice+1.0 Temp
27	1.2 Dead+1.0 Wind 0 deg+1.0 Ice+1.0 Temp
28	1.2 Dead+1.0 Wind 30 deg+1.0 Ice+1.0 Temp
29	1.2 Dead+1.0 Wind 60 deg+1.0 Ice+1.0 Temp
30	1.2 Dead+1.0 Wind 90 deg+1.0 Ice+1.0 Temp
31	1.2 Dead+1.0 Wind 120 deg+1.0 Ice+1.0 Temp
32	1.2 Dead+1.0 Wind 150 deg+1.0 Ice+1.0 Temp
33	1.2 Dead+1.0 Wind 180 deg+1.0 Ice+1.0 Temp
34	1.2 Dead+1.0 Wind 210 deg+1.0 Ice+1.0 Temp
35	1.2 Dead+1.0 Wind 240 deg+1.0 Ice+1.0 Temp
36	1.2 Dead+1.0 Wind 270 deg+1.0 Ice+1.0 Temp
37	1.2 Dead+1.0 Wind 300 deg+1.0 Ice+1.0 Temp
38	1.2 Dead+1.0 Wind 330 deg+1.0 Ice+1.0 Temp
39	Dead+Wind 0 deg - Service
40	Dead+Wind 30 deg - Service
41	Dead+Wind 60 deg - Service
42	Dead+Wind 90 deg - Service
43	Dead+Wind 120 deg - Service
44	Dead+Wind 150 deg - Service
45	Dead+Wind 180 deg - Service
46	Dead+Wind 210 deg - Service
47	Dead+Wind 240 deg - Service
48	Dead+Wind 270 deg - Service
49	Dead+Wind 300 deg - Service
50	Dead+Wind 330 deg - Service



### Maximum Member Forces

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L1	169 - 164	Pole	Max Tension	15	0.00	-0.00	0.00
			Max. Compression	26	-11.55	-0.00	0.00
			Max. Mx	8	-3.29	-10.63	0.00
			Max. My	2	-3.25	-0.00	10.65
			Max. Vy	8	6.68	-10.63	0.00
			Max. Vx	2	-6.70	-0.00	10.65
L2	164 - 159	Pole	Max. Torque	2			0.00
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-12.12	-0.00	0.02
			Max. Mx	8	-3.58	-44.87	0.02
			Max. My	2	-3.54	-0.01	44.99
			Max. Vy	8	7.02	-44.87	0.02
L3	159 - 154	Pole	Max. Vx	2	-7.04	-0.01	44.99
			Max. Torque	2			0.00
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-22.26	-0.00	0.72
			Max. Mx	8	-5.97	-116.08	0.17
			Max. My	2	-5.89	-0.03	116.50
L4	154 - 149	Pole	Max. Vy	8	13.24	-116.08	0.17
			Max. Vx	2	-13.27	-0.03	116.50
			Max. Torque	20			-0.28
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-22.95	-0.01	0.75
			Max. Mx	8	-6.42	-183.12	0.20
L5	149 - 144	Pole	Max. My	2	-6.34	-0.05	183.72
			Max. Vy	8	13.58	-183.12	0.20
			Max. Vx	2	-13.62	-0.05	183.72
			Max. Torque	20			-0.28
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-27.72	-0.01	0.77
L6	144 - 139	Pole	Max. Mx	8	-8.04	-259.72	0.23
			Max. My	2	-7.95	-0.08	260.53
			Max. Vy	8	15.89	-259.72	0.23
			Max. Vx	2	-15.93	-0.08	260.53
			Max. Torque	20			-0.28
			Max Tension	1	0.00	0.00	0.00
L7	139 - 133.33	Pole	Max. Compression	26	-28.48	-0.01	0.80
			Max. Mx	8	-8.61	-339.96	0.26
			Max. My	2	-8.51	-0.10	341.02
			Max. Vy	8	16.23	-339.96	0.26
			Max. Vx	2	-16.27	-0.10	341.02
			Max. Torque	20			-0.28
L8	133.33 - 131.66	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-29.96	-0.07	0.84
			Max. Mx	8	-9.10	-379.01	0.28
			Max. My	2	-9.00	-0.13	380.18
			Max. Vy	8	17.06	-379.01	0.28
			Max. Vx	2	-17.11	-0.13	380.18
L9	131.66 - 126.66	Pole	Max. Torque	20			-0.28
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-31.40	-0.19	0.93
			Max. Mx	8	-9.99	-465.34	0.33
			Max. My	2	-9.89	-0.18	466.77
			Max. Vy	8	17.47	-465.34	0.33
			Max. Vx	2	-17.53	-0.18	466.77
			Max. Torque	20			-0.28
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-32.80	0.25	1.37
			Max. Mx	8	-10.72	-554.21	0.58
			Max. My	2	-10.62	-0.49	556.06

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L10	126.66 - 121.66	Pole	Max. Vy	8	18.40	-554.21	0.58
			Max. Vx	14	18.52	0.25	-555.61
			Max. Torque	8			0.90
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-35.68	0.25	1.49
			Max. Mx	8	-12.05	-651.52	1.49
			Max. My	2	-11.94	-1.57	653.78
			Max. Vy	8	19.72	-651.52	1.49
			Max. Vx	14	19.85	0.94	-653.57
			Max. Torque	6			0.93
L11	121.66 - 116.66	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-37.08	-0.19	1.27
			Max. Mx	8	-12.91	-751.04	2.36
			Max. My	14	-12.79	1.56	-753.74
			Max. Vy	8	20.10	-751.04	2.36
			Max. Vx	14	20.25	1.56	-753.74
			Max. Torque	6			0.93
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-38.40	-0.37	1.21
			Max. Mx	8	-13.78	-852.33	3.28
L12	116.66 - 111.66	Pole	Max. My	14	-13.66	2.25	-855.77
			Max. Vy	8	20.43	-852.33	3.28
			Max. Vx	14	20.59	2.25	-855.77
			Max. Torque	8			0.86
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-38.58	-0.40	1.21
			Max. Mx	8	-13.91	-865.83	3.41
			Max. My	14	-13.78	2.34	-869.36
			Max. Vy	8	20.47	-865.83	3.41
			Max. Vx	14	20.63	2.34	-869.36
L13	111.66 - 111	Pole	Max. Torque	8			0.86
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-47.26	-1.87	0.37
			Max. Mx	8	-16.44	-872.31	3.31
			Max. My	14	-16.30	2.13	-875.74
			Max. Vy	8	24.67	-872.31	3.31
			Max. Vx	14	24.83	2.13	-875.74
			Max. Torque	8			0.86
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-49.41	-1.69	0.52
L14	111 - 110.75	Pole	Max. Mx	8	-17.72	-996.56	4.09
			Max. My	14	-17.54	2.73	-1002.05
			Max. Vy	8	25.08	-996.56	4.09
			Max. Vx	14	25.76	2.73	-1002.05
			Max. Torque	4			-0.68
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-51.56	-1.53	0.65
			Max. Mx	8	-18.85	-1103.77	4.77
			Max. My	14	-18.63	3.24	-1113.12
			Max. Vy	8	25.43	-1103.77	4.77
L15	110.75 - 105.75	Pole	Max. Vx	14	26.57	3.24	-1113.12
			Max. Torque	4			-0.64
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-51.72	-1.52	0.67
			Max. Mx	8	-18.96	-1110.12	4.81
			Max. My	14	-18.73	3.28	-1119.77
			Max. Vy	8	25.45	-1110.12	4.81
			Max. Vx	14	26.63	3.28	-1119.77
			Max. Torque	4			-0.62
			Max Tension	1	0.00	0.00	0.00
L16	105.75 - 101.5	Pole	Max. Vy	8	18.40	-554.21	0.58
			Max. Vx	14	18.52	0.25	-555.61
			Max. Torque	8			0.90
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-35.68	0.25	1.49
			Max. Mx	8	-12.05	-651.52	1.49
			Max. My	2	-11.94	-1.57	653.78
			Max. Vy	8	19.72	-651.52	1.49
			Max. Vx	14	19.85	0.94	-653.57
			Max. Torque	6			0.93
L17	101.5 - 101.25	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-37.08	-0.19	1.27
			Max. Mx	8	-12.91	-751.04	2.36
			Max. My	14	-12.79	1.56	-753.74
			Max. Vy	8	20.10	-751.04	2.36
			Max. Vx	14	20.25	1.56	-753.74
			Max. Torque	6			0.93
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-38.40	-0.37	1.21
			Max. Mx	8	-13.78	-852.33	3.28

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L18	101.25 - 101	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-51.89	-1.51	0.68
			Max. Mx	8	-19.05	-1116.48	4.85
			Max. My	14	-18.83	3.31	-1126.42
			Max. Vy	8	25.48	-1116.48	4.85
			Max. Vx	14	26.68	3.31	-1126.42
			Max. Torque	4			-0.62
L19	101 - 100.75	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-52.04	-1.50	0.69
			Max. Mx	8	-19.13	-1122.84	4.89
			Max. My	14	-18.90	3.34	-1133.09
			Max. Vy	8	25.50	-1122.84	4.89
			Max. Vx	14	26.73	3.34	-1133.09
			Max. Torque	4			-0.62
L20	100.75 - 95.75	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-54.87	-1.31	0.85
			Max. Mx	8	-20.68	-1251.28	5.68
			Max. My	14	-20.41	3.94	-1268.99
			Max. Vy	8	25.94	-1251.28	5.68
			Max. Vx	14	27.70	3.94	-1268.99
			Max. Torque	4			-0.62
L21	95.75 - 87.83	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-56.87	-1.17	0.97
			Max. Mx	8	-21.81	-1344.85	6.26
			Max. My	14	-21.53	4.38	-1369.56
			Max. Vy	8	26.25	-1344.85	6.26
			Max. Vx	14	28.39	4.38	-1369.56
			Max. Torque	4			-0.60
L22	87.83 - 86.83	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-61.66	-0.96	1.15
			Max. Mx	8	-24.91	-1486.26	7.11
			Max. My	14	-24.59	5.04	-1523.96
			Max. Vy	8	26.85	-1486.26	7.11
			Max. Vx	14	29.58	5.04	-1523.96
			Max. Torque	4			-0.56
L23	86.83 - 81.83	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-65.01	-0.76	1.33
			Max. Mx	8	-26.89	-1621.52	7.91
			Max. My	14	-26.55	5.65	-1674.25
			Max. Vy	8	27.31	-1621.52	7.91
			Max. Vx	14	30.59	5.65	-1674.25
			Max. Torque	4			-0.56
L24	81.83 - 81.5	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-65.24	-0.75	1.34
			Max. Mx	8	-27.03	-1630.53	7.97
			Max. My	14	-26.69	5.70	-1684.34
			Max. Vy	8	27.34	-1630.53	7.97
			Max. Vx	14	30.66	5.70	-1684.34
			Max. Torque	4			-0.54
L25	81.5 - 81.25	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-65.41	-0.74	1.36
			Max. Mx	8	-27.13	-1637.36	8.01
			Max. My	14	-26.79	5.73	-1692.01
			Max. Vy	8	27.37	-1637.36	8.01
			Max. Vx	14	30.72	5.73	-1692.01
			Max. Torque	4			-0.54
L26	81.25 - 76.25	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-68.77	-0.53	1.52
			Max. Mx	8	-29.16	-1775.15	8.81
			Max. My	14	-28.80	6.34	-1847.87

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L27	76.25 - 71.25	Pole	Max. Vy	8	27.82	-1775.15	8.81
			Max. Vx	14	31.70	6.34	-1847.87
			Max. Torque	4			-0.54
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-72.11	-0.32	1.71
			Max. Mx	8	-31.23	-1915.18	9.62
			Max. My	14	-30.86	6.97	-2008.64
			Max. Vy	8	28.26	-1915.18	9.62
			Max. Vx	14	32.67	6.97	-2008.64
			Max. Torque	4			-0.52
L28	71.25 - 66.25	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-75.47	-0.11	1.89
			Max. Mx	8	-33.32	-2057.40	10.43
			Max. My	14	-32.95	7.59	-2174.26
			Max. Vy	6	28.85	-1874.03	1091.32
			Max. Vx	14	33.64	7.59	-2174.26
			Max. Torque	4			-0.50
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-78.85	0.11	2.09
			Max. Mx	8	-35.44	-2201.76	11.24
L29	66.25 - 61.25	Pole	Max. My	14	-35.08	8.22	-2344.66
			Max. Vy	6	29.34	-2019.32	1175.96
			Max. Vx	14	34.59	8.22	-2344.66
			Max. Torque	4			-0.48
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-82.25	0.33	2.28
			Max. Mx	8	-37.59	-2348.21	12.05
			Max. My	14	-37.23	8.84	-2519.79
			Max. Vy	6	29.81	-2167.00	1261.98
			Max. Vx	14	35.53	8.84	-2519.79
L30	61.25 - 56.25	Pole	Max. Torque	4			-0.46
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-85.67	0.55	2.48
			Max. Mx	8	-39.77	-2496.69	12.86
			Max. My	14	-39.42	9.47	-2699.57
			Max. Vy	6	30.26	-2316.97	1349.33
			Max. Vx	14	36.46	9.47	-2699.57
			Max. Torque	4			-0.44
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-87.52	0.68	2.59
L31	56.25 - 51.25	Pole	Max. Mx	8	-40.90	-2574.37	13.28
			Max. My	14	-40.57	9.80	-2794.50
			Max. Vy	6	30.49	-2395.54	1395.08
			Max. Vx	14	36.93	9.80	-2794.50
			Max. Torque	4			-0.43
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-95.09	1.00	2.87
			Max. Mx	8	-46.18	-2767.01	14.31
			Max. My	14	-45.85	10.59	-3032.38
			Max. Vy	6	31.29	-2590.73	1508.74
L32	51.25 - 43.33	Pole	Max. Vx	14	38.28	10.59	-3032.38
			Max. Torque	4			-0.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-99.23	1.27	3.10
			Max. Mx	8	-48.83	-2919.54	15.11
			Max. My	14	-48.53	11.21	-3223.15
			Max. Vy	6	32.06	-2746.68	1599.53
			Max. Vx	14	39.20	11.21	-3223.15
			Max. Torque	4			-0.45
			Max Tension	1	0.00	0.00	0.00
L33	43.33 - 42.33	Pole	Max. Compression	26	-95.09	1.00	2.87
			Max. Mx	8	-46.18	-2767.01	14.31
			Max. My	14	-45.85	10.59	-3032.38
			Max. Vy	6	31.29	-2590.73	1508.74
			Max. Vx	14	38.28	10.59	-3032.38
			Max. Torque	4			-0.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-99.23	1.27	3.10
			Max. Mx	8	-48.83	-2919.54	15.11
			Max. My	14	-48.53	11.21	-3223.15
L34	42.33 - 37.4	Pole	Max. Vy	6	32.06	-2746.68	1599.53
			Max. Vx	14	39.20	11.21	-3223.15
			Max. Torque	4			-0.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-99.23	1.27	3.10
			Max. Mx	8	-48.83	-2919.54	15.11
			Max. My	14	-48.53	11.21	-3223.15
			Max. Vy	6	32.06	-2746.68	1599.53
			Max. Vx	14	39.20	11.21	-3223.15
			Max. Torque	4			-0.45

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L35	37.4 - 37.15	Pole	Max. Torque	4			-0.48
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-99.44	1.29	3.12
			Max. Mx	8	-48.98	-2927.32	15.15
			Max. My	14	-48.68	11.25	-3232.95
			Max. Vy	6	32.09	-2754.69	1604.19
			Max. Vx	14	39.25	11.25	-3232.95
L36	37.15 - 32.15	Pole	Max. Torque	4			-0.49
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-103.65	1.57	3.35
			Max. Mx	8	-51.69	-3083.97	15.96
			Max. My	14	-51.41	11.88	-3431.16
			Max. Vy	6	32.85	-2916.85	1698.58
			Max. Vx	14	40.13	11.88	-3431.16
L37	32.15 - 27.15	Pole	Max. Torque	4			-0.52
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-107.86	1.85	3.59
			Max. Mx	8	-54.44	-3242.40	16.77
			Max. My	14	-54.20	12.51	-3633.75
			Max. Vy	6	33.57	-3082.70	1795.10
			Max. Vx	14	40.99	12.51	-3633.75
L38	27.15 - 22.15	Pole	Max. Torque	4			-0.56
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-112.08	2.13	3.83
			Max. Mx	8	-57.21	-3402.48	17.57
			Max. My	14	-57.01	13.14	-3840.51
			Max. Vy	6	33.96	-3251.33	1893.22
			Max. Vx	14	41.81	13.14	-3840.51
L39	22.15 - 19.5	Pole	Max. Torque	4			-0.60
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-114.32	2.29	3.96
			Max. Mx	8	-58.69	-3487.96	18.00
			Max. My	14	-58.51	13.47	-3951.73
			Max. Vy	6	34.32	-3341.68	1945.79
			Max. Vx	14	42.23	13.47	-3951.73
L40	19.5 - 19.25	Pole	Max. Torque	4			-0.62
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-114.54	2.30	3.98
			Max. Mx	8	-58.85	-3496.05	18.04
			Max. My	14	-58.68	13.50	-3962.28
			Max. Vy	6	34.33	-3350.25	1950.77
			Max. Vx	14	42.27	13.50	-3962.28
L41	19.25 - 14.25	Pole	Max. Torque	4			-0.62
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-118.92	2.59	4.22
			Max. Mx	8	-61.82	-3658.52	18.84
			Max. My	14	-61.69	14.13	-4175.26
			Max. Vy	6	34.70	-3522.65	2051.07
			Max. Vx	14	43.02	14.13	-4175.26
L42	14.25 - 9.25	Pole	Max. Torque	4			-0.66
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-123.28	2.89	4.47
			Max. Mx	8	-64.82	-3822.38	19.65
			Max. My	14	-64.73	14.76	-4391.98
			Max. Vy	6	35.03	-3696.74	2152.35
			Max. Vx	14	43.76	14.76	-4391.98
L43	9.25 - 9	Pole	Max. Torque	4			-0.70
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-123.50	2.90	4.49
			Max. Mx	8	-64.98	-3830.61	19.69
			Max. My	14	-64.90	14.79	-4402.91

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L44	9 - 8.75	Pole	Max. Vy	6	35.03	-3705.49	2157.43
			Max. Vx	14	43.79	14.79	-4402.91
			Max. Torque	4			-0.70
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-123.72	2.92	4.50
			Max. Mx	8	-65.14	-3838.85	19.73
			Max. My	14	-65.06	14.82	-4413.85
			Max. Vy	6	35.05	-3714.24	2162.53
L45	8.75 - 7	Pole	Max. Vx	14	43.82	14.82	-4413.85
			Max. Torque	4			-0.71
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-125.27	3.02	4.59
			Max. Mx	8	-66.22	-3896.57	20.01
			Max. My	14	-66.15	15.04	-4490.70
			Max. Vy	6	35.19	-3775.62	2198.23
			Max. Vx	14	44.11	15.04	-4490.70
L46	7 - 6.75	Pole	Max. Torque	4			-0.72
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-125.49	3.03	4.60
			Max. Mx	8	-66.39	-3904.83	20.05
			Max. My	14	-66.33	15.08	-4501.72
			Max. Vy	6	35.18	-3784.40	2203.34
			Max. Vx	14	44.12	15.08	-4501.72
			Max. Torque	4			-0.72
L47	6.75 - 5	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-126.99	3.13	4.69
			Max. Mx	8	-67.44	-3962.74	20.33
			Max. My	14	-67.38	15.29	-4579.09
			Max. Vy	6	35.32	-3846.01	2239.18
			Max. Vx	14	44.40	15.29	-4579.09
			Max. Torque	4			-0.74
			Max Tension	1	0.00	0.00	0.00
L48	5 - 4.75	Pole	Max. Compression	26	-127.24	3.15	4.70
			Max. Mx	8	-67.64	-3971.03	20.37
			Max. My	14	-67.60	15.33	-4590.18
			Max. Vy	6	35.31	-3854.83	2244.30
			Max. Vx	14	44.41	15.33	-4590.18
			Max. Torque	4			-0.74
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-129.01	3.25	4.79
L49	4.75 - 3	Pole	Max. Mx	8	-68.97	-4029.15	20.65
			Max. My	14	-68.94	15.55	-4668.08
			Max. Vy	6	35.46	-3916.68	2280.28
			Max. Vx	14	44.71	15.55	-4668.08
			Max. Torque	4			-0.75
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-129.27	3.26	4.80
			Max. Mx	8	-69.18	-4037.47	20.69
L50	3 - 2.75	Pole	Max. My	14	-69.16	15.58	-4679.25
			Max. Vy	6	35.46	-3925.53	2285.43
			Max. Vx	14	44.73	15.58	-4679.25
			Max. Torque	4			-0.75
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-129.78	3.29	4.83
			Max. Mx	8	-69.58	-4054.13	20.77
			Max. My	14	-69.55	15.64	-4701.62
L51	2.75 - 2.25	Pole	Max. Vy	6	35.50	-3943.26	2295.74
			Max. Vx	14	44.81	15.64	-4701.62
			Max. Torque	4			-0.76
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-130.00	3.31	4.84
			Max. Mx	8	-69.74	-4062.46	20.81
			Max. My	14	-69.72	15.67	-4712.82
			Max. Vy	6	35.51	-3952.12	2300.90
L52	2.25 - 2	Pole	Max. Vx	14	44.85	15.67	-4712.82

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L53	2 - 0	Pole	Max. Torque	4			-0.76
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-131.73	3.42	4.93
			Max. M <sub>x</sub>	8	-71.06	-4129.24	21.12
			Max. M <sub>y</sub>	14	-71.05	15.92	-4802.76
			Max. V <sub>y</sub>	6	35.66	-4023.22	2342.25
			Max. V <sub>x</sub>	14	45.17	15.92	-4802.76
			Max. Torque	4			-0.78

### Maximum Reactions

Location	Condition	Gov. Load Comb.	Vertical K	Horizontal, X K	Horizontal, Z K
Pole	Max. Vert	26	131.73	0.00	-0.00
	Max. H <sub>x</sub>	19	53.30	35.55	-20.73
	Max. H <sub>z</sub>	2	71.06	-0.18	45.09
	Max. M <sub>x</sub>	2	4799.36	-0.18	45.09
	Max. M <sub>z</sub>	8	4129.24	-33.48	0.14
	Max. Torsion	16	0.78	24.54	-42.56
	Min. Vert	15	53.30	0.10	-45.15
	Min. H <sub>x</sub>	7	53.30	-35.64	20.69
	Min. H <sub>z</sub>	14	71.06	0.10	-45.15
	Min. M <sub>x</sub>	14	-4802.76	0.10	-45.15
	Min. M <sub>z</sub>	20	-4122.24	33.40	-0.04
	Min. Torsion	4	-0.78	-24.59	42.53

### Tower Mast Reaction Summary

Load Combination	Vertical K	Shear <sub>x</sub> K	Shear <sub>z</sub> K	Overturning Moment, M <sub>x</sub> kip-ft	Overturning Moment, M <sub>z</sub> kip-ft	Torque kip-ft
Dead Only	59.22	-0.00	-0.00	-1.78	1.64	0.00
1.2 Dead+1.0 Wind 0 deg - No Ice	71.06	0.18	-45.09	-4799.36	-22.24	0.62
0.9 Dead+1.0 Wind 0 deg - No Ice	53.30	0.18	-45.09	-4742.31	-22.47	0.61
1.2 Dead+1.0 Wind 30 deg - No Ice	71.06	24.59	-42.53	-4423.92	-2554.67	0.78
0.9 Dead+1.0 Wind 30 deg - No Ice	53.30	24.59	-42.53	-4372.33	-2525.69	0.77
1.2 Dead+1.0 Wind 60 deg - No Ice	71.06	35.64	-20.69	-2342.25	-4023.22	-0.10
0.9 Dead+1.0 Wind 60 deg - No Ice	53.30	35.64	-20.69	-2313.62	-3975.47	-0.11
1.2 Dead+1.0 Wind 90 deg - No Ice	71.06	33.48	-0.14	-21.12	-4129.24	-0.39
0.9 Dead+1.0 Wind 90 deg - No Ice	53.30	33.48	-0.14	-20.33	-4077.73	-0.39
1.2 Dead+1.0 Wind 120 deg - No Ice	71.06	28.98	16.73	2061.42	-3572.33	-0.24
0.9 Dead+1.0 Wind 120 deg - No Ice	53.30	28.98	16.73	2035.96	-3527.75	-0.23
1.2 Dead+1.0 Wind 150 deg - No Ice	71.06	16.81	29.39	3612.39	-2063.06	-0.02
0.9 Dead+1.0 Wind 150 deg - No Ice	53.30	16.81	29.39	3567.51	-2037.58	-0.01
1.2 Dead+1.0 Wind 180 deg - No Ice	71.06	-0.10	45.15	4802.76	15.92	-0.46
0.9 Dead+1.0 Wind 180 deg	53.30	-0.10	45.15	4746.69	15.24	-0.45

Load Combination	Vertical K	Shear <sub>x</sub> K	Shear <sub>z</sub> K	Overturning Moment, M <sub>x</sub> kip-ft	Overturning Moment, M <sub>z</sub> kip-ft	Torque kip-ft
- No Ice						
1.2 Dead+1.0 Wind 210 deg	71.06	-24.54	42.56	4422.78	2552.98	-0.78
- No Ice						
0.9 Dead+1.0 Wind 210 deg	53.30	-24.54	42.56	4372.30	2523.03	-0.77
- No Ice						
1.2 Dead+1.0 Wind 240 deg	71.06	-35.55	20.73	2342.66	4014.95	-0.06
- No Ice						
0.9 Dead+1.0 Wind 240 deg	53.30	-35.55	20.73	2315.12	3966.31	-0.06
- No Ice						
1.2 Dead+1.0 Wind 270 deg	71.06	-33.40	0.04	3.86	4122.24	0.38
- No Ice						
0.9 Dead+1.0 Wind 270 deg	53.30	-33.39	0.04	4.36	4069.63	0.38
- No Ice						
1.2 Dead+1.0 Wind 300 deg	71.06	-28.95	-16.71	-2063.44	3572.14	0.24
- No Ice						
0.9 Dead+1.0 Wind 300 deg	53.30	-28.95	-16.71	-2036.86	3526.58	0.23
- No Ice						
1.2 Dead+1.0 Wind 330 deg	71.06	-16.85	-29.27	-3601.08	2072.79	0.03
- No Ice						
0.9 Dead+1.0 Wind 330 deg	53.30	-16.85	-29.27	-3555.23	2046.22	0.02
- No Ice						
1.2 Dead+1.0 Ice+1.0 Temp	131.73	-0.00	0.00	-4.93	3.42	0.00
1.2 Dead+1.0 Wind 0 deg+1.0 Ice+1.0 Temp	131.73	0.04	-11.03	-1348.91	-1.77	0.41
1.2 Dead+1.0 Wind 30 deg+1.0 Ice+1.0 Temp	131.73	6.01	-10.40	-1232.38	-705.67	0.51
1.2 Dead+1.0 Wind 60 deg+1.0 Ice+1.0 Temp	131.73	8.87	-5.15	-662.37	-1128.14	0.09
1.2 Dead+1.0 Wind 90 deg+1.0 Ice+1.0 Temp	131.73	9.40	-0.03	-9.58	-1236.15	-0.09
1.2 Dead+1.0 Wind 120 deg+1.0 Ice+1.0 Temp	131.73	8.13	4.69	613.60	-1068.68	-0.12
1.2 Dead+1.0 Wind 150 deg+1.0 Ice+1.0 Temp	131.73	4.67	8.15	1070.22	-612.73	-0.12
1.2 Dead+1.0 Wind 180 deg+1.0 Ice+1.0 Temp	131.73	-0.02	11.05	1339.79	6.60	-0.37
1.2 Dead+1.0 Wind 210 deg+1.0 Ice+1.0 Temp	131.73	-6.00	10.40	1222.21	711.48	-0.51
1.2 Dead+1.0 Wind 240 deg+1.0 Ice+1.0 Temp	131.73	-8.86	5.15	652.52	1132.56	-0.13
1.2 Dead+1.0 Wind 270 deg+1.0 Ice+1.0 Temp	131.73	-9.38	0.01	-3.99	1240.88	0.08
1.2 Dead+1.0 Wind 300 deg+1.0 Ice+1.0 Temp	131.73	-8.12	-4.69	-623.94	1074.80	0.12
1.2 Dead+1.0 Wind 330 deg+1.0 Ice+1.0 Temp	131.73	-4.68	-8.13	-1077.74	620.94	0.13
Dead+Wind 0 deg - Service	59.22	0.04	-9.78	-1036.59	-3.56	0.14
Dead+Wind 30 deg - Service	59.22	5.33	-9.23	-956.04	-550.05	0.17
Dead+Wind 60 deg - Service	59.22	7.73	-4.49	-506.65	-866.66	-0.03
Dead+Wind 90 deg - Service	59.22	7.26	-0.03	-5.92	-889.08	-0.09
Dead+Wind 120 deg - Service	59.22	6.29	3.63	443.13	-769.04	-0.05
Dead+Wind 150 deg - Service	59.22	3.65	6.38	777.58	-443.62	-0.00
Dead+Wind 180 deg - Service	59.22	-0.02	9.80	1034.68	4.67	-0.10
Dead+Wind 210 deg - Service	59.22	-5.33	9.23	953.06	552.17	-0.17
Dead+Wind 240 deg - Service	59.22	-7.71	4.50	503.99	867.35	-0.01
Dead+Wind 270 deg - Service	59.22	-7.25	0.01	-0.53	890.09	0.08
Dead+Wind 300 deg - Service	59.22	-6.28	-3.63	-446.30	771.48	0.05



Load Combination	Vertical K	Shear <sub>x</sub> K	Shear <sub>z</sub> K	Overturning Moment, M <sub>x</sub> kip-ft	Overturning Moment, M <sub>z</sub> kip-ft	Torque kip-ft
Dead+Wind 330 deg - Service	59.22	-3.66	-6.35	-777.87	448.20	0.01

## Solution Summary

Load Comb.	Sum of Applied Forces			Sum of Reactions			% Error
	PX K	PY K	PZ K	PX K	PY K	PZ K	
1	0.00	-59.22	0.00	0.00	59.22	0.00	0.000%
2	0.18	-71.06	-45.09	-0.18	71.06	45.09	0.001%
3	0.18	-53.30	-45.09	-0.18	53.30	45.09	0.002%
4	24.59	-71.06	-42.53	-24.59	71.06	42.53	0.000%
5	24.59	-53.30	-42.53	-24.59	53.30	42.53	0.000%
6	35.64	-71.06	-20.69	-35.64	71.06	20.69	0.000%
7	35.64	-53.30	-20.69	-35.64	53.30	20.69	0.000%
8	33.48	-71.06	-0.14	-33.48	71.06	0.14	0.003%
9	33.48	-53.30	-0.14	-33.48	53.30	0.14	0.002%
10	28.98	-71.06	16.73	-28.98	71.06	-16.73	0.000%
11	28.98	-53.30	16.73	-28.98	53.30	-16.73	0.000%
12	16.81	-71.06	29.39	-16.81	71.06	-29.39	0.000%
13	16.81	-53.30	29.39	-16.81	53.30	-29.39	0.000%
14	-0.10	-71.06	45.15	0.10	71.06	-45.15	0.005%
15	-0.10	-53.30	45.15	0.10	53.30	-45.15	0.007%
16	-24.54	-71.06	42.56	24.54	71.06	-42.56	0.000%
17	-24.54	-53.30	42.56	24.54	53.30	-42.56	0.000%
18	-35.55	-71.06	20.73	35.55	71.06	-20.73	0.000%
19	-35.55	-53.30	20.73	35.55	53.30	-20.73	0.000%
20	-33.40	-71.06	0.04	33.40	71.06	-0.04	0.005%
21	-33.40	-53.30	0.04	33.39	53.30	-0.04	0.007%
22	-28.95	-71.06	-16.71	28.95	71.06	16.71	0.000%
23	-28.95	-53.30	-16.71	28.95	53.30	16.71	0.000%
24	-16.86	-71.06	-29.27	16.85	71.06	29.27	0.000%
25	-16.86	-53.30	-29.27	16.85	53.30	29.27	0.000%
26	0.00	-131.73	0.00	0.00	131.73	-0.00	0.001%
27	0.04	-131.73	-11.03	-0.04	131.73	11.03	0.000%
28	6.01	-131.73	-10.40	-6.01	131.73	10.40	0.000%
29	8.87	-131.73	-5.15	-8.87	131.73	5.15	0.000%
30	9.40	-131.73	-0.03	-9.40	131.73	0.03	0.000%
31	8.13	-131.73	4.69	-8.13	131.73	-4.69	0.000%
32	4.68	-131.73	8.15	-4.67	131.73	-8.15	0.000%
33	-0.02	-131.73	11.05	0.02	131.73	-11.05	0.000%
34	-6.00	-131.73	10.40	6.00	131.73	-10.40	0.000%
35	-8.86	-131.73	5.15	8.86	131.73	-5.15	0.000%
36	-9.38	-131.73	0.01	9.38	131.73	-0.01	0.000%
37	-8.12	-131.73	-4.69	8.12	131.73	4.69	0.000%
38	-4.68	-131.73	-8.13	4.68	131.73	8.13	0.000%
39	0.04	-59.22	-9.78	-0.04	59.22	9.78	0.004%
40	5.34	-59.22	-9.23	-5.33	59.22	9.23	0.001%
41	7.73	-59.22	-4.49	-7.73	59.22	4.49	0.001%
42	7.27	-59.22	-0.03	-7.26	59.22	0.03	0.002%
43	6.29	-59.22	3.63	-6.29	59.22	-3.63	0.001%
44	3.65	-59.22	6.38	-3.65	59.22	-6.38	0.001%
45	-0.02	-59.22	9.80	0.02	59.22	-9.80	0.004%
46	-5.33	-59.22	9.24	5.33	59.22	-9.23	0.001%
47	-7.71	-59.22	4.50	7.71	59.22	-4.50	0.001%
48	-7.25	-59.22	0.01	7.25	59.22	-0.01	0.002%
49	-6.28	-59.22	-3.63	6.28	59.22	3.63	0.001%
50	-3.66	-59.22	-6.35	3.66	59.22	6.35	0.001%

### Non-Linear Convergence Results

Load Combination	Converged?	Number of Cycles	Displacement Tolerance	Force Tolerance
1	Yes	6	0.00000001	0.00000001
2	Yes	21	0.00001788	0.00009207
3	Yes	20	0.00002078	0.00012211
4	Yes	28	0.00000001	0.00000000
5	Yes	27	0.00000001	0.00000000
6	Yes	27	0.00000001	0.00014064
7	Yes	27	0.00000001	0.00000000
8	Yes	20	0.00003240	0.00014972
9	Yes	20	0.00002107	0.00011464
10	Yes	27	0.00000001	0.00012277
11	Yes	27	0.00000001	0.00000000
12	Yes	27	0.00000001	0.00012392
13	Yes	27	0.00000001	0.00000000
14	Yes	19	0.00005669	0.00009328
15	Yes	18	0.00006675	0.00011165
16	Yes	28	0.00000001	0.00000000
17	Yes	27	0.00000001	0.00000000
18	Yes	27	0.00000001	0.00014012
19	Yes	27	0.00000001	0.00000000
20	Yes	19	0.00005751	0.00009642
21	Yes	18	0.00006767	0.00012041
22	Yes	27	0.00000001	0.00012343
23	Yes	27	0.00000001	0.00000000
24	Yes	27	0.00000001	0.00012391
25	Yes	27	0.00000001	0.00000000
26	Yes	10	0.00000001	0.00005562
27	Yes	25	0.00000001	0.00010334
28	Yes	26	0.00000001	0.00009586
29	Yes	25	0.00000001	0.00014758
30	Yes	25	0.00000001	0.00009950
31	Yes	25	0.00000001	0.00013896
32	Yes	25	0.00000001	0.00013947
33	Yes	25	0.00000001	0.00010258
34	Yes	26	0.00000001	0.00009417
35	Yes	25	0.00000001	0.00014625
36	Yes	25	0.00000001	0.00009933
37	Yes	25	0.00000001	0.00014066
38	Yes	25	0.00000001	0.00014013
39	Yes	17	0.00014995	0.00005667
40	Yes	20	0.00000001	0.00013094
41	Yes	20	0.00000001	0.00011304
42	Yes	18	0.00008658	0.00003219
43	Yes	20	0.00000001	0.00009220
44	Yes	20	0.00000001	0.00009401
45	Yes	17	0.00014994	0.00005214
46	Yes	20	0.00000001	0.00012600
47	Yes	20	0.00000001	0.00011178
48	Yes	18	0.00008657	0.00003052
49	Yes	20	0.00000001	0.00009484
50	Yes	20	0.00000001	0.00009466

### Maximum Tower Deflections - Service Wind

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L1	169 - 164	33.536	40	2.0988	0.0016
L2	164 - 159	31.339	40	2.0976	0.0016
L3	159 - 154	29.151	40	2.0796	0.0016
L4	154 - 149	26.993	40	2.0383	0.0016
L5	149 - 144	24.895	40	1.9668	0.0014

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L6	144 - 139	22.882	40	1.8760	0.0013
L7	139 - 133.33	20.972	40	1.7690	0.0011
L8	136.66 - 131.66	20.119	40	1.7146	0.0011
L9	131.66 - 126.66	18.356	40	1.6403	0.0010
L10	126.66 - 121.66	16.698	40	1.5269	0.0009
L11	121.66 - 116.66	15.161	40	1.4084	0.0007
L12	116.66 - 111.66	13.750	40	1.2857	0.0005
L13	111.66 - 111	12.469	40	1.1603	0.0004
L14	111 - 110.75	12.310	40	1.1437	0.0004
L15	110.75 - 105.75	12.250	40	1.1401	0.0004
L16	105.75 - 101.5	11.095	40	1.0663	0.0003
L17	101.5 - 101.25	10.175	40	1.0007	0.0003
L18	101.25 - 101	10.123	40	0.9985	0.0003
L19	101 - 100.75	10.070	40	0.9962	0.0003
L20	100.75 - 95.75	10.018	40	0.9932	0.0003
L21	95.75 - 87.83	9.011	40	0.9313	0.0002
L22	92.16 - 86.83	8.327	40	0.8857	0.0002
L23	86.83 - 81.83	7.356	40	0.8504	0.0002
L24	81.83 - 81.5	6.494	40	0.7973	0.0002
L25	81.5 - 81.25	6.439	40	0.7938	0.0002
L26	81.25 - 76.25	6.397	40	0.7912	0.0002
L27	76.25 - 71.25	5.596	40	0.7382	0.0002
L28	71.25 - 66.25	4.852	40	0.6839	0.0001
L29	66.25 - 61.25	4.165	40	0.6285	0.0001
L30	61.25 - 56.25	3.536	40	0.5726	0.0001
L31	56.25 - 51.25	2.966	40	0.5164	0.0001
L32	51.25 - 43.33	2.455	40	0.4591	0.0001
L33	48.66 - 42.33	2.214	40	0.4296	0.0001
L34	42.33 - 37.4	1.666	40	0.3921	0.0001
L35	37.4 - 37.15	1.286	40	0.3443	0.0001
L36	37.15 - 32.15	1.268	40	0.3419	0.0001
L37	32.15 - 27.15	0.936	40	0.2930	0.0001
L38	27.15 - 22.15	0.655	40	0.2435	0.0000
L39	22.15 - 19.5	0.426	40	0.1941	0.0000
L40	19.5 - 19.25	0.325	40	0.1679	0.0000
L41	19.25 - 14.25	0.317	40	0.1656	0.0000
L42	14.25 - 9.25	0.168	40	0.1190	0.0000
L43	9.25 - 9	0.067	40	0.0730	0.0000
L44	9 - 8.75	0.063	40	0.0707	0.0000
L45	8.75 - 7	0.060	40	0.0685	0.0000
L46	7 - 6.75	0.037	40	0.0531	0.0000
L47	6.75 - 5	0.035	40	0.0508	0.0000
L48	5 - 4.75	0.019	40	0.0348	0.0000
L49	4.75 - 3	0.017	40	0.0332	0.0000
L50	3 - 2.75	0.007	40	0.0220	0.0000
L51	2.75 - 2.25	0.006	40	0.0204	0.0000
L52	2.25 - 2	0.004	40	0.0172	0.0000
L53	2 - 0	0.003	40	0.0153	0.0000

### Critical Deflections and Radius of Curvature - Service Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
165.00	AIR 32 B2A/B66AA w/ Mount Pipe	40	31.778	2.0988	0.0018	34128
156.00	DMP65R-BU8D w/ Mount Pipe	40	27.851	2.0583	0.0017	6269
148.00	NNVV-65B-R4 w/ Mount Pipe	40	24.485	1.9498	0.0015	3380
138.00	APXV18-206517-A w/ Mount Pipe	40	20.605	1.7447	0.0012	2994
128.00	VHLP800-11	40	17.131	1.5601	0.0010	2532
124.00	LLPX310R w/ Mount Pipe	40	15.864	1.4636	0.0008	2408

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
118.00	CAVITY FILTER	40	14.115	1.3184	0.0006	2328
111.00	(2) HBXX-6517DS-A2M w/ Mount Pipe	40	12.310	1.1437	0.0004	2882

**Maximum Tower Deflections - Design Wind**

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L1	169 - 164	154.812	4	9.7249	0.0072
L2	164 - 159	144.714	4	9.7195	0.0072
L3	159 - 154	134.655	4	9.6360	0.0072
L4	154 - 149	124.729	4	9.4450	0.0068
L5	149 - 144	115.076	4	9.1148	0.0061
L6	144 - 139	105.809	4	8.6952	0.0055
L7	139 - 133.33	97.012	4	8.2002	0.0050
L8	136.66 - 131.66	93.077	4	7.9488	0.0048
L9	131.66 - 126.66	84.947	4	7.6048	0.0046
L10	126.66 - 121.66	77.293	4	7.0793	0.0041
L11	121.66 - 116.66	70.194	4	6.5303	0.0031
L12	116.66 - 111.66	63.674	4	5.9618	0.0022
L13	111.66 - 111	57.752	4	5.3803	0.0018
L14	111 - 110.75	57.015	4	5.3034	0.0019
L15	110.75 - 105.75	56.738	4	5.2870	0.0018
L16	105.75 - 101.5	51.393	4	4.9449	0.0016
L17	101.5 - 101.25	47.135	4	4.6408	0.0013
L18	101.25 - 101	46.892	4	4.6302	0.0013
L19	101 - 100.75	46.651	4	4.6197	0.0013
L20	100.75 - 95.75	46.410	4	4.6057	0.0013
L21	95.75 - 87.83	41.744	4	4.3190	0.0011
L22	92.16 - 86.83	38.581	4	4.1075	0.0010
L23	86.83 - 81.83	34.083	4	3.9434	0.0009
L24	81.83 - 81.5	30.088	4	3.6973	0.0008
L25	81.5 - 81.25	29.833	4	3.6811	0.0008
L26	81.25 - 76.25	29.641	4	3.6691	0.0008
L27	76.25 - 71.25	25.932	4	3.4230	0.0007
L28	71.25 - 66.25	22.482	4	3.1713	0.0007
L29	66.25 - 61.25	19.299	4	2.9142	0.0006
L30	61.25 - 56.25	16.385	4	2.6551	0.0005
L31	56.25 - 51.25	13.743	4	2.3944	0.0005
L32	51.25 - 43.33	11.376	4	2.1285	0.0004
L33	48.66 - 42.33	10.259	4	1.9917	0.0004
L34	42.33 - 37.4	7.722	4	1.8178	0.0003
L35	37.4 - 37.15	5.960	4	1.5961	0.0003
L36	37.15 - 32.15	5.877	4	1.5849	0.0003
L37	32.15 - 27.15	4.336	4	1.3580	0.0003
L38	27.15 - 22.15	3.035	4	1.1286	0.0002
L39	22.15 - 19.5	1.973	4	0.8996	0.0002
L40	19.5 - 19.25	1.508	4	0.7781	0.0002
L41	19.25 - 14.25	1.467	4	0.7675	0.0001
L42	14.25 - 9.25	0.777	4	0.5513	0.0001
L43	9.25 - 9	0.311	4	0.3383	0.0001
L44	9 - 8.75	0.294	4	0.3277	0.0001
L45	8.75 - 7	0.277	4	0.3174	0.0001
L46	7 - 6.75	0.174	4	0.2462	0.0000
L47	6.75 - 5	0.161	4	0.2355	0.0000
L48	5 - 4.75	0.088	4	0.1613	0.0000
L49	4.75 - 3	0.080	4	0.1539	0.0000
L50	3 - 2.75	0.033	4	0.1018	0.0000
L51	2.75 - 2.25	0.028	4	0.0945	0.0000
L52	2.25 - 2	0.019	4	0.0798	0.0000
L53	2 - 0	0.015	4	0.0711	0.0000

### Critical Deflections and Radius of Curvature - Design Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
165.00	AIR 32 B2A/B66AA w/ Mount Pipe	4	146.732	9.7250	0.0090	7756
156.00	DMP65R-BU8D w/ Mount Pipe	4	128.675	9.5374	0.0088	1427
148.00	NNVV-65B-R4 w/ Mount Pipe	4	113.189	9.0364	0.0075	765
138.00	APXV18-206517-A w/ Mount Pipe	4	95.319	8.0877	0.0060	671
128.00	VHLP800-11	4	79.292	7.2331	0.0049	563
124.00	LLPX310R w/ Mount Pipe	4	73.445	6.7861	0.0040	534
118.00	CAVITY FILTER	4	65.364	6.1131	0.0026	515
111.00	(2) HBXX-6517DS-A2M w/ Mount Pipe	4	57.015	5.3034	0.0019	634

### Compression Checks

### Pole Design Data

Section No.	Elevation ft	Size	L ft	L <sub>u</sub> ft	Kl/r	A in <sup>2</sup>	P <sub>u</sub> K
L1	169 - 164 (1)	TP16.4546x15.5x0.25	5.00	0.00	0.0	12,858 3	-3.23
L2	164 - 159 (2)	TP17.4092x16.4546x0.25	5.00	0.00	0.0	13,615 8	-3.52
L3	159 - 154 (3)	TP18.3638x17.4092x0.25	5.00	0.00	0.0	14,373 3	-5.84
L4	154 - 149 (4)	TP19.3183x18.3638x0.25	5.00	0.00	0.0	15,130 7	-6.29
L5	149 - 144 (5)	TP20.2729x19.3183x0.25	5.00	0.00	0.0	15,888 2	-7.89
L6	144 - 139 (6)	TP21.2275x20.2729x0.25	5.00	0.00	0.0	16,645 6	-8.45
L7	139 - 133.33 (7)	TP22.31x21.2275x0.25	5.67	0.00	0.0	17,000 1	-8.94
L8	133.33 - 131.66 (8)	TP22.1148x21.1742x0.31 25	5.00	0.00	0.0	21,625 2	-9.82
L9	131.66 - 126.66 (9)	TP23.0554x22.1148x0.31 25	5.00	0.00	0.0	22,558 1	-10.54
L10	126.66 - 121.66 (10)	TP23.996x23.0554x0.312 5	5.00	0.00	0.0	23,491 1	-11.85
L11	121.66 - 116.66 (11)	TP24.9366x23.996x0.312 5	5.00	0.00	0.0	24,424 0	-12.67
L12	116.66 - 111.66 (12)	TP25.8772x24.9366x0.31 25	5.00	0.00	0.0	25,357 0	-13.50
L13	111.66 - 111 (13)	TP26.0013x25.8772x0.31 25	0.66	0.00	0.0	25,480 1	-13.63
L14	111 - 110.75 (14)	TP26.0484x26.0013x0.57 5	0.25	0.00	0.0	46,490 2	-16.13
L15	110.75 - 105.75 (15)	TP26.9889x26.0484x0.56 25	5.00	0.00	0.0	47,181 1	-17.36
L16	105.75 - 101.5 (16)	TP27.7884x26.9889x0.55	4.25	0.00	0.0	47,550 1	-18.45
L17	101.5 - 101.25 (17)	TP27.8355x27.7884x0.98 75	0.25	0.00	0.0	84,150 3	-18.55
L18	101.25 - 101 (18)	TP27.8825x27.8355x0.98 75	0.25	0.00	0.0	84,297 7	-18.64
L19	101 - 100.75 (19)	TP27.9295x27.8825x0.72 5	0.25	0.00	0.0	62,601 7	-18.72
L20	100.75 - 95.75 (20)	TP28.8701x27.9295x0.71 25	5.00	0.00	0.0	63,677 7	-20.22

Section No.	Elevation ft	Size	L ft	$L_u$ ft	$KI/r$	A in <sup>2</sup>	$P_u$ K
L21	95.75 - 87.83 (21)	TP30.36x28.8701x0.7	7.92	0.00	0.0	64.088 8	-21.33
L22	87.83 - 86.83 (22)	TP29.9235x28.9205x0.93 75	5.33	0.00	0.0	86.251 6	-24.39
L23	86.83 - 81.83 (23)	TP30.8645x29.9235x0.92 5	5.00	0.00	0.0	87.900 9	-26.34
L24	81.83 - 81.5 (24)	TP30.9266x30.8645x0.92 5	0.33	0.00	0.0	88.083 2	-26.48
L25	81.5 - 81.25 (25)	TP30.9737x30.9266x0.95	0.25	0.00	0.0	90.530 3	-26.58
L26	81.25 - 76.25 (26)	TP31.9146x30.9737x0.92 5	5.00	0.00	0.0	90.984 0	-28.59
L27	76.25 - 71.25 (27)	TP32.8556x31.9146x0.9	5.00	0.00	0.0	91.284 4	-30.65
L28	71.25 - 66.25 (28)	TP33.7966x32.8556x0.87 5	5.00	0.00	0.0	91.431 4	-32.75
L29	66.25 - 61.25 (29)	TP34.7376x33.7966x0.86 25	5.00	0.00	0.0	92.735 5	-34.88
L30	61.25 - 56.25 (30)	TP35.6785x34.7376x0.85	5.00	0.00	0.0	93.963 9	-37.04
L31	56.25 - 51.25 (31)	TP36.6195x35.6785x0.82 5	5.00	0.00	0.0	93.729 7	-39.24
L32	51.25 - 43.33 (32)	TP38.11x36.6195x0.825	7.92	0.00	0.0	95.006 0	-40.40
L33	43.33 - 42.33 (33)	TP37.5463x36.3569x1.03 75	6.33	0.00	0.0	120.22 40	-45.68
L34	42.33 - 37.4 (34)	TP38.4726x37.5463x1.02 5	4.93	0.00	0.0	121.83 00	-48.37
L35	37.4 - 37.15 (35)	TP38.5196x38.4726x1.02 5	0.25	0.00	0.0	121.98 30	-48.53
L36	37.15 - 32.15 (36)	TP39.4591x38.5196x1	5.00	0.00	0.0	122.06 90	-51.28
L37	32.15 - 27.15 (37)	TP40.3986x39.4591x0.97 5	5.00	0.00	0.0	122.00 20	-54.08
L38	27.15 - 22.15 (38)	TP41.3381x40.3986x0.96 25	5.00	0.00	0.0	123.34 60	-56.91
L39	22.15 - 19.5 (39)	TP41.836x41.3381x0.95	2.65	0.00	0.0	123.28 40	-58.42
L40	19.5 - 19.25 (40)	TP41.883x41.836x1.025	0.25	0.00	0.0	132.92 50	-58.59
L41	19.25 - 14.25 (41)	TP42.8225x41.883x1	5.00	0.00	0.0	132.74 50	-61.62
L42	14.25 - 9.25 (42)	TP43.762x42.8225x1	5.00	0.00	0.0	135.72 60	-64.69
L43	9.25 - 9 (43)	TP43.8089x43.762x1	0.25	0.00	0.0	135.87 60	-64.86
L44	9 - 8.75 (44)	TP43.8559x43.8089x1.02 5	0.25	0.00	0.0	139.34 40	-65.02
L45	8.75 - 7 (45)	TP44.1847x43.8559x1.02 5	1.75	0.00	0.0	140.41 40	-66.12
L46	7 - 6.75 (46)	TP44.2317x44.1847x0.97 5	0.25	0.00	0.0	133.86 40	-66.30
L47	6.75 - 5 (47)	TP44.5605x44.2317x0.97 5	1.75	0.00	0.0	134.88 20	-67.36
L48	5 - 4.75 (48)	TP44.6075x44.5605x1.45	0.25	0.00	0.0	198.62 40	-67.58
L49	4.75 - 3 (49)	TP44.9363x44.6075x1.42 5	1.75	0.00	0.0	196.79 90	-68.93
L50	3 - 2.75 (50)	TP44.9833x44.9363x1.45	0.25	0.00	0.0	200.35 30	-69.15
L51	2.75 - 2.25 (51)	TP45.0772x44.9833x1.45	0.50	0.00	0.0	200.78 60	-69.54
L52	2.25 - 2 (52)	TP45.1242x45.0772x1.2	0.25	0.00	0.0	167.29 90	-69.71
L53	2 - 0 (53)	TP45.5x45.1242x1.175	2.00	0.00	0.0	165.30 80	-71.05

Section No.	Elevation ft	Size	L ft	L <sub>u</sub> ft	KI/r	A in <sup>2</sup>	P <sub>u</sub> K
-------------	--------------	------	------	-------------------	------	-------------------	------------------

### Pole Bending Design Data

Section No.	Elevation ft	Size	M <sub>ux</sub> kip-ft	M <sub>uy</sub> kip-ft
L1	169 - 164 (1)	TP16.4546x15.5x0.25	10.66	0.00
L2	164 - 159 (2)	TP17.4092x16.4546x0.25	45.07	0.00
L3	159 - 154 (3)	TP18.3638x17.4092x0.25	116.65	0.00
L4	154 - 149 (4)	TP19.3183x18.3638x0.25	183.98	0.00
L5	149 - 144 (5)	TP20.2729x19.3183x0.25	260.94	0.00
L6	144 - 139 (6)	TP21.2275x20.2729x0.25	341.58	0.00
L7	139 - 133.33 (7)	TP22.31x21.2275x0.25	380.82	0.00
L8	133.33 - 131.66 (8)	TP22.1148x21.1742x0.3125	467.60	0.00
L9	131.66 - 126.66 (9)	TP23.0554x22.1148x0.3125	557.17	0.00
L10	126.66 - 121.66 (10)	TP23.996x23.0554x0.3125	655.62	0.00
L11	121.66 - 116.66 (11)	TP24.9366x23.996x0.3125	757.35	0.00
L12	116.66 - 111.66 (12)	TP25.8772x24.9366x0.3125	863.10	0.00
L13	111.66 - 111 (13)	TP26.0013x25.8772x0.3125	877.33	0.00
L14	111 - 110.75 (14)	TP26.0484x26.0013x0.575	883.77	0.00
L15	110.75 - 105.75 (15)	TP26.9889x26.0484x0.5625	1015.26	0.00
L16	105.75 - 101.5 (16)	TP27.7884x26.9889x0.55	1131.21	0.00
L17	101.5 - 101.25 (17)	TP27.8355x27.7884x0.9875	1138.16	0.00
L18	101.25 - 101 (18)	TP27.8825x27.8355x0.9875	1145.12	0.00
L19	101 - 100.75 (19)	TP27.9295x27.8825x0.725	1152.09	0.00
L20	100.75 - 95.75 (20)	TP28.8701x27.9295x0.7125	1294.62	0.00
L21	95.75 - 87.83 (21)	TP30.36x28.8701x0.7	1400.51	0.00
L22	87.83 - 86.83 (22)	TP29.9235x28.9205x0.9375	1563.68	0.00
L23	86.83 - 81.83 (23)	TP30.8645x29.9235x0.925	1723.10	0.00
L24	81.83 - 81.5 (24)	TP30.9266x30.8645x0.925	1733.83	0.00
L25	81.5 - 81.25 (25)	TP30.9737x30.9266x0.95	1741.97	0.00
L26	81.25 - 76.25 (26)	TP31.9146x30.9737x0.925	1907.91	0.00
L27	76.25 - 71.25 (27)	TP32.8556x31.9146x0.9	2079.66	0.00
L28	71.25 - 66.25 (28)	TP33.7966x32.8556x0.875	2257.13	0.00
L29	66.25 - 61.25 (29)	TP34.7376x33.7966x0.8625	2440.28	0.00
L30	61.25 - 56.25 (30)	TP35.6785x34.7376x0.85	2628.99	0.00
L31	56.25 - 51.25 (31)	TP36.6195x35.6785x0.825	2823.19	0.00
L32	51.25 - 43.33 (32)	TP38.11x36.6195x0.825	2925.90	0.00

Section No.	Elevation ft	Size	$M_{ux}$ kip-ft	$M_{uy}$ kip-ft
L33	43.33 - 42.33 (33)	TP37.5463x36.3569x1.0375	3183.59	0.00
L34	42.33 - 37.4 (34)	TP38.4726x37.5463x1.025	3390.53	0.00
L35	37.4 - 37.15 (35)	TP38.5196x38.4726x1.025	3401.15	0.00
L36	37.15 - 32.15 (36)	TP39.4591x38.5196x1	3616.35	0.00
L37	32.15 - 27.15 (37)	TP40.3986x39.4591x0.975	3836.46	0.00
L38	27.15 - 22.15 (38)	TP41.3381x40.3986x0.9625	4061.28	0.00
L39	22.15 - 19.5 (39)	TP41.836x41.3381x0.95	4182.25	0.00
L40	19.5 - 19.25 (40)	TP41.883x41.836x1.025	4193.73	0.00
L41	19.25 - 14.25 (41)	TP42.8225x41.883x1	4425.47	0.00
L42	14.25 - 9.25 (42)	TP43.762x42.8225x1	4661.32	0.00
L43	9.25 - 9 (43)	TP43.8089x43.762x1	4673.23	0.00
L44	9 - 8.75 (44)	TP43.8559x43.8089x1.025	4685.14	0.00
L45	8.75 - 7 (45)	TP44.1847x43.8559x1.025	4768.80	0.00
L46	7 - 6.75 (46)	TP44.2317x44.1847x0.975	4780.79	0.00
L47	6.75 - 5 (47)	TP44.5605x44.2317x0.975	4865.02	0.00
L48	5 - 4.75 (48)	TP44.6075x44.5605x1.45	4877.09	0.00
L49	4.75 - 3 (49)	TP44.9363x44.6075x1.425	4961.92	0.00
L50	3 - 2.75 (50)	TP44.9833x44.9363x1.45	4974.07	0.00
L51	2.75 - 2.25 (51)	TP45.0772x44.9833x1.45	4998.43	0.00
L52	2.25 - 2 (52)	TP45.1242x45.0772x1.2	5010.63	0.00
L53	2 - 0 (53)	TP45.5x45.1242x1.175	5108.56	0.00

### Pole Shear Design Data


Section No.	Elevation ft	Size	Actual $V_u$ K	Actual $T_u$ kip-ft
L1	169 - 164 (1)	TP16.4546x15.5x0.25	6.72	0.00
L2	164 - 159 (2)	TP17.4092x16.4546x0.25	7.05	0.00
L3	159 - 154 (3)	TP18.3638x17.4092x0.25	13.30	0.14
L4	154 - 149 (4)	TP19.3183x18.3638x0.25	13.65	0.14
L5	149 - 144 (5)	TP20.2729x19.3183x0.25	15.96	0.14
L6	144 - 139 (6)	TP21.2275x20.2729x0.25	16.31	0.14
L7	139 - 133.33 (7)	TP22.31x21.2275x0.25	17.14	0.14
L8	133.33 - 131.66 (8)	TP22.1148x21.1742x0.3125	17.57	0.14
L9	131.66 - 126.66 (9)	TP23.0554x22.1148x0.3125	18.59	0.67
L10	126.66 - 121.66 (10)	TP23.996x23.0554x0.3125	19.96	0.73
L11	121.66 - 116.66 (11)	TP24.9366x23.996x0.3125	20.78	0.48
L12	116.66 - 111.66 (12)	TP25.8772x24.9366x0.3125	21.55	0.30
L13	111.66 - 111 (13)	TP26.0013x25.8772x0.3125	21.60	0.27



Section No.	Elevation ft	Size	Actual $V_u$ K	Actual $T_u$ kip-ft
L14	111 - 110.75 (14)	TP26.0484x26.0013x0.57 5	25.80	0.68
L15	110.75 - 105.75 (15)	TP26.9889x26.0484x0.56 25	26.83	0.65
L16	105.75 - 101.5 (16)	TP27.7884x26.9889x0.55	27.76	0.63
L17	101.5 - 101.25 (17)	TP27.8355x27.7884x0.98 75	27.83	0.62
L18	101.25 - 101 (18)	TP27.8825x27.8355x0.98 75	27.89	0.62
L19	101 - 100.75 (19)	TP27.9295x27.8825x0.72 5	27.95	0.62
L20	100.75 - 95.75 (20)	TP28.8701x27.9295x0.71 25	29.09	0.60
L21	95.75 - 87.83 (21)	TP30.36x28.8701x0.7	29.92	0.59
L22	87.83 - 86.83 (22)	TP29.9235x28.9205x0.93 75	31.31	0.56
L23	86.83 - 81.83 (23)	TP30.8645x29.9235x0.92 5	32.48	0.54
L24	81.83 - 81.5 (24)	TP30.9266x30.8645x0.92 5	32.56	0.54
L25	81.5 - 81.25 (25)	TP30.9737x30.9266x0.95	32.62	0.54
L26	81.25 - 76.25 (26)	TP31.9146x30.9737x0.92 5	33.78	0.52
L27	76.25 - 71.25 (27)	TP32.8556x31.9146x0.9	34.94	0.50
L28	71.25 - 66.25 (28)	TP33.7966x32.8556x0.87 5	36.08	0.48
L29	66.25 - 61.25 (29)	TP34.7376x33.7966x0.86 25	37.20	0.46
L30	61.25 - 56.25 (30)	TP35.6785x34.7376x0.85	38.31	0.45
L31	56.25 - 51.25 (31)	TP36.6195x35.6785x0.82 5	39.40	0.43
L32	51.25 - 43.33 (32)	TP38.11x36.6195x0.825	39.95	0.43
L33	43.33 - 42.33 (33)	TP37.5463x36.3569x1.03 75	41.47	0.45
L34	42.33 - 37.4 (34)	TP38.4726x37.5463x1.02 5	42.50	0.48
L35	37.4 - 37.15 (35)	TP38.5196x38.4726x1.02 5	42.54	0.49
L36	37.15 - 32.15 (36)	TP39.4591x38.5196x1	43.56	0.52
L37	32.15 - 27.15 (37)	TP40.3986x39.4591x0.97 5	44.52	0.56
L38	27.15 - 22.15 (38)	TP41.3381x40.3986x0.96 25	45.44	0.60
L39	22.15 - 19.5 (39)	TP41.836x41.3381x0.95	45.91	0.62
L40	19.5 - 19.25 (40)	TP41.883x41.836x1.025	45.93	0.62
L41	19.25 - 14.25 (41)	TP42.8225x41.883x1	46.78	0.66
L42	14.25 - 9.25 (42)	TP43.762x42.8225x1	47.60	0.70
L43	9.25 - 9 (43)	TP43.8089x43.762x1	47.62	0.70
L44	9 - 8.75 (44)	TP43.8559x43.8089x1.02 5	47.66	0.71
L45	8.75 - 7 (45)	TP44.1847x43.8559x1.02 5	47.98	0.72
L46	7 - 6.75 (46)	TP44.2317x44.1847x0.97 5	47.99	0.72

Section No.	Elevation ft	Size	Actual $V_u$ K	Actual $T_u$ kip-ft
L47	6.75 - 5 (47)	TP44.5605x44.2317x0.97 5	48.31	0.74
L48	5 - 4.75 (48)	TP44.6075x44.5605x1.45	48.31	0.74
L49	4.75 - 3 (49)	TP44.9363x44.6075x1.42 5	48.65	0.75
L50	3 - 2.75 (50)	TP44.9833x44.9363x1.45	48.67	0.75
L51	2.75 - 2.25 (51)	TP45.0772x44.9833x1.45	48.76	0.76
L52	2.25 - 2 (52)	TP45.1242x45.0772x1.2	48.80	0.76
L53	2 - 0 (53)	TP45.5x45.1242x1.175	49.15	0.78

**APPENDIX B**  
**BASE LEVEL DRAWING**

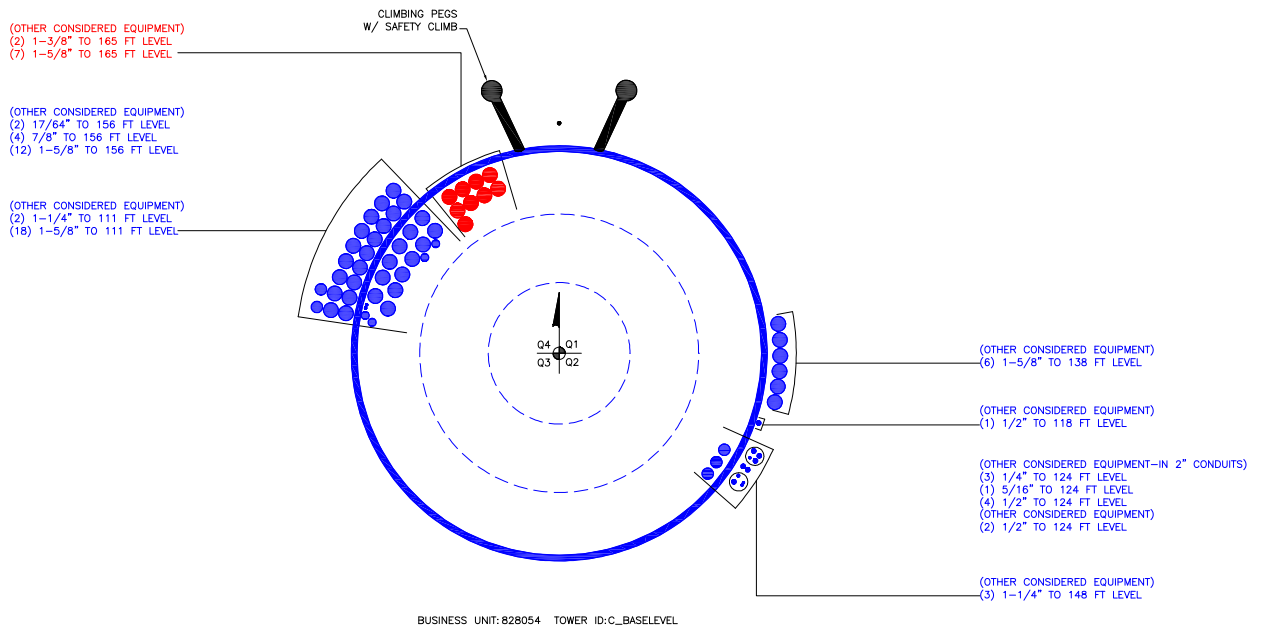

**APPENDIX C**  
**ADDITIONAL CALCULATIONS**

**Pole Geometry**

	Pole Height Above Base (ft)	Section Length (ft)	Lap Splice Length (ft)	Number of Sides	Top Diameter (in)	Bottom Diameter (in)	Wall Thickness (in)	Bend Radius (in)	Pole Material
1	169	35.67	3.33	18	15.5	22.31	0.25	Auto	A572-65
2	136.66	48.83	4.33	18	21.17	30.36	0.3125	Auto	A572-65
3	92.16	48.83	5.33	18	28.92	38.11	0.375	Auto	A572-65
4	48.66	48.66	0	18	36.36	45.5	0.375	Auto	A572-65

**Reinforcement Configuration**

	Bottom Effective Elevation (ft)	Top Effective Elevation (ft)	Type	Model	Number	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	
1	2.25	19.5	plate	I-065125; (1)(1.1875)	4																			
2	19.5	44.58	plate	I-060100; (1)(1.1875)	4																			
3	3	5	plate	FP 1.25 x 8.1	4																			
4	81.5	88.5	plate	I-045100; (1)(1.1875)	3																			
5	0	3	plate	FP 1.25 x 6.1	6																			
6	101	111	plate	I-060100; (1)(1.1875)	3																			
7	0	37.4	plate	6 x 1.25; (1)(1.1875)	4																			
8	0	7	plate	6 x 1.25; (1)(1.1875)	2																			
9	9	37.4	plate	6 x 1.25; (1)(1.1875)	2																			
10	7	9	plate	FP 4 x 1.25_1	4																			
11	37.4	81.5	plate	6 x 1.25; (1)(1.1875)	6																			
12	81.5	101.5	plate	4 x 1.25; (1)(1.1875)	6																			
13																								

**Reinforcement Details**

	B (in)	H (in)	Gross Area (in <sup>2</sup> )	Pole Face to Centroid (in)	Bottom Termination Length (in)	Top Termination Length (in)	L <sub>p</sub> (in)	Net Area (in <sup>2</sup> )	Bolt Hole Size (in)	Reinforcement Material
1	6.5	1.25	8.125	0.625	n/a	33.000	19.000	6.563	1.1875	A572-65
2	6	1	6	0.5	33.000	33.000	16.000	4.750	1.1875	A572-65
3	1.25	8	10	4	n/a	n/a	0.000	10.000	0.0000	A572-65
4	4.5	1	4.5	0.5	18.000	18.000	20.000	3.250	1.1875	A572-65
5	1.25	6	7.5	3	n/a	n/a	0.000	7.500	0.0000	A572-65
6	6	1	6	0.5	33.000	33.000	16.000	4.750	1.1875	A572-65
7	6	1.25	7.5	0.625	36.000	36.000	12.000	5.938	1.1875	A572-65
8	6	1.25	7.5	0.625	36.000	36.000	12.000	5.938	1.1875	A572-65
9	6	1.25	7.5	0.625	36.000	36.000	12.000	5.938	1.1875	A572-65
10	4	1.25	5	0.625	n/a	n/a	12.000	5.000	0.0000	A572-65
11	6	1.25	7.5	0.625	36.000	36.000	12.000	5.938	1.1875	A572-65
12	4	1.25	5	0.625	30.000	30.000	18.000	3.438	1.1875	A572-65

# TNX Geometry Input

Increment (ft): 5 [Export to TNX](#)

	Section Height (ft)	Section Length (ft)	Lap Splice Length (ft)	Number of Sides	Top Diameter (in)	Bottom Diameter (in)	Wall Thickness (in)	Tapered Pole Grade	Weight Multiplier
1	169 - 164	5		18	15.500	16.455	0.25	A572-65	1.000
2	164 - 159	5		18	16.455	17.409	0.25	A572-65	1.000
3	159 - 154	5		18	17.409	18.364	0.25	A572-65	1.000
4	154 - 149	5		18	18.364	19.318	0.25	A572-65	1.000
5	149 - 144	5		18	19.318	20.273	0.25	A572-65	1.000
6	144 - 139	5		18	20.273	21.228	0.25	A572-65	1.000
7	139 - 136.66	5.67	3.33	18	21.228	22.310	0.25	A572-65	1.000
8	136.66 - 131.66	5		18	21.174	22.115	0.3125	A572-65	1.000
9	131.66 - 126.66	5		18	22.115	23.055	0.3125	A572-65	1.000
10	126.66 - 121.66	5		18	23.055	23.996	0.3125	A572-65	1.000
11	121.66 - 116.66	5		18	23.996	24.937	0.3125	A572-65	1.000
12	116.66 - 111.66	5		18	24.937	25.877	0.3125	A572-65	1.000
13	111.66 - 111	0.66		18	25.877	26.001	0.3125	A572-65	1.000
14	111 - 110.75	0.25		18	26.001	26.048	0.575	A572-65	0.936
15	110.75 - 105.75	5		18	26.048	26.989	0.5625	A572-65	0.942
16	105.75 - 101.5	4.25		18	26.989	27.788	0.55	A572-65	0.952
17	101.5 - 101.25	0.25		18	27.788	27.835	0.9875	A572-65	0.895
18	101.25 - 101	0.25		18	27.835	27.882	0.9875	A572-65	0.894
19	101 - 100.75	0.25		18	27.882	27.930	0.725	A572-65	0.917
20	100.75 - 95.75	5		18	27.930	28.870	0.7125	A572-65	0.916
21	95.75 - 92.16	7.92	4.33	18	28.870	30.360	0.7	A572-65	0.921
22	92.16 - 86.83	5.33		18	28.920	29.924	0.9375	A572-65	0.912
23	86.83 - 81.83	5		18	29.924	30.865	0.925	A572-65	0.908
24	81.83 - 81.5	0.33		18	30.865	30.927	0.925	A572-65	0.907
25	81.5 - 81.25	0.25		18	30.927	30.974	0.95	A572-65	0.899
26	81.25 - 76.25	5		18	30.974	31.915	0.925	A572-65	0.907
27	76.25 - 71.25	5		18	31.915	32.856	0.9	A572-65	0.916
28	71.25 - 66.25	5		18	32.856	33.797	0.875	A572-65	0.927
29	66.25 - 61.25	5		18	33.797	34.738	0.8625	A572-65	0.926
30	61.25 - 56.25	5		18	34.738	35.679	0.85	A572-65	0.926
31	56.25 - 51.25	5		18	35.679	36.619	0.825	A572-65	0.940
32	51.25 - 48.66	7.92	5.33	18	36.619	38.110	0.825	A572-65	0.934
33	48.66 - 42.33	6.33		18	36.357	37.546	1.0375	A572-65	0.942
34	42.33 - 37.4	4.93		18	37.546	38.473	1.025	A572-65	0.939
35	37.4 - 37.15	0.25		18	38.473	38.520	1.025	A572-65	0.938
36	37.15 - 32.15	5		18	38.520	39.459	1	A572-65	0.946
37	32.15 - 27.15	5		18	39.459	40.399	0.975	A572-65	0.956
38	27.15 - 22.15	5		18	40.399	41.338	0.9625	A572-65	0.955
39	22.15 - 19.5	2.65		18	41.338	41.836	0.95	A572-65	0.960
40	19.5 - 19.25	0.25		18	41.836	41.883	1.025	A572-65	0.955
41	19.25 - 14.25	5		18	41.883	42.822	1	A572-65	0.964
42	14.25 - 9.25	5		18	42.822	43.762	1	A572-65	0.952
43	9.25 - 9	0.25		18	43.762	43.809	1	A572-65	0.951
44	9 - 8.75	0.25		18	43.809	43.856	1.025	A572-65	0.963
45	8.75 - 7	1.75		18	43.856	44.185	1.025	A572-65	0.959
46	7 - 6.75	0.25		18	44.185	44.232	0.975	A572-65	0.969
47	6.75 - 5	1.75		18	44.232	44.561	0.975	A572-65	0.965
48	5 - 4.75	0.25		18	44.561	44.607	1.45	A572-65	0.857
49	4.75 - 3	1.75		18	44.607	44.936	1.425	A572-65	0.867
50	3 - 2.75	0.25		18	44.936	44.983	1.45	A572-65	0.876
51	2.75 - 2.25	0.5		18	44.983	45.077	1.45	A572-65	0.875
52	2.25 - 2	0.25		18	45.077	45.124	1.2	A572-65	0.856
53	2 - 0	2		18	45.124	45.500	1.175	A572-65	0.869

# TNX Section Forces

Increment (ft):		TNX Output			
	5	Section Height (ft)	P <sub>u</sub> (K)	M <sub>ux</sub> (kip-ft)	V <sub>u</sub> (K)
1	169 - 164		3.23	10.66	6.72
2	164 - 159		3.52	45.07	7.05
3	159 - 154		5.84	116.64	13.30
4	154 - 149		6.29	183.98	13.65
5	149 - 144		7.89	260.94	15.96
6	144 - 139		8.45	341.58	16.31
7	139 - 136.66		8.94	380.82	17.14
8	136.66 - 131.66		9.82	467.60	17.56
9	131.66 - 126.66		10.54	557.17	18.59
10	126.66 - 121.66		11.85	655.62	19.96
11	121.66 - 116.66		12.67	757.35	20.78
12	116.66 - 111.66		13.50	863.10	21.55
13	111.66 - 111		13.63	877.33	21.60
14	111 - 110.75		16.13	883.77	25.80
15	110.75 - 105.75		17.36	1015.26	26.83
16	105.75 - 101.5		18.45	1131.21	27.76
17	101.5 - 101.25		18.55	1138.16	27.83
18	101.25 - 101		18.64	1145.12	27.89
19	101 - 100.75		18.72	1152.09	27.95
20	100.75 - 95.75		20.22	1294.61	29.09
21	95.75 - 92.16		21.33	1400.50	29.92
22	92.16 - 86.83		24.39	1563.68	31.31
23	86.83 - 81.83		26.34	1723.10	32.48
24	81.83 - 81.5		26.48	1733.83	32.56
25	81.5 - 81.25		26.58	1741.97	32.62
26	81.25 - 76.25		28.59	1907.91	33.78
27	76.25 - 71.25		30.65	2079.65	34.94
28	71.25 - 66.25		32.75	2257.13	36.08
29	66.25 - 61.25		34.88	2440.27	37.20
30	61.25 - 56.25		37.04	2628.99	38.31
31	56.25 - 51.25		39.24	2823.19	39.40
32	51.25 - 48.66		40.40	2925.90	39.95
33	48.66 - 42.33		45.68	3183.59	41.47
34	42.33 - 37.4		48.37	3390.53	42.50
35	37.4 - 37.15		48.53	3401.15	42.54
36	37.15 - 32.15		51.28	3616.35	43.56
37	32.15 - 27.15		54.08	3836.46	44.52
38	27.15 - 22.15		56.91	4061.27	45.44
39	22.15 - 19.5		58.42	4182.25	45.91
40	19.5 - 19.25		58.59	4193.73	45.93
41	19.25 - 14.25		61.62	4425.46	46.78
42	14.25 - 9.25		64.69	4661.33	47.60
43	9.25 - 9		64.86	4673.23	47.62
44	9 - 8.75		65.02	4685.14	47.66
45	8.75 - 7		66.12	4768.80	47.98
46	7 - 6.75		66.30	4780.79	47.99
47	6.75 - 5		67.36	4865.02	48.31
48	5 - 4.75		67.58	4877.09	48.31
49	4.75 - 3		68.93	4961.91	48.65
50	3 - 2.75		69.15	4974.07	48.67
51	2.75 - 2.25		69.54	4998.43	48.76
52	2.25 - 2		69.71	5010.62	48.80
53	2 - 0		71.05	5108.56	49.15



# Analysis Results

Elevation (ft)	Component Type	Size	Critical Element	% Capacity	Pass / Fail
169 - 164	Pole	TP16.455x15.5x0.25	Pole	3.6%	Pass
164 - 159	Pole	TP17.409x16.455x0.25	Pole	12.4%	Pass
159 - 154	Pole	TP18.364x17.409x0.25	Pole	28.7%	Pass
154 - 149	Pole	TP19.318x18.364x0.25	Pole	40.5%	Pass
149 - 144	Pole	TP20.273x19.318x0.25	Pole	52.0%	Pass
144 - 139	Pole	TP21.228x20.273x0.25	Pole	61.9%	Pass
139 - 136.66	Pole	TP22.31x21.228x0.25	Pole	66.1%	Pass
136.66 - 131.66	Pole	TP22.115x21.174x0.3125	Pole	62.8%	Pass
131.66 - 126.66	Pole	TP23.055x22.115x0.3125	Pole	68.7%	Pass
126.66 - 121.66	Pole	TP23.996x23.055x0.3125	Pole	74.5%	Pass
121.66 - 116.66	Pole	TP24.937x23.996x0.3125	Pole	79.5%	Pass
116.66 - 111.66	Pole	TP25.877x24.937x0.3125	Pole	84.0%	Pass
111.66 - 111	Pole	TP26.001x25.877x0.3125	Pole	84.6%	Pass
111 - 110.75	Pole + Reinf.	TP26.048x26.001x0.575	Reinf. 6 Tension Rupture	76.1%	Pass
110.75 - 105.75	Pole + Reinf.	TP26.989x26.048x0.5625	Reinf. 6 Tension Rupture	82.6%	Pass
105.75 - 101.5	Pole + Reinf.	TP27.788x26.989x0.55	Reinf. 6 Tension Rupture	87.9%	Pass
101.5 - 101.25	Pole + Reinf.	TP27.835x27.788x0.9875	Reinf. 12 Tension Rupture	59.9%	Pass
101.25 - 101	Pole + Reinf.	TP27.882x27.835x0.9875	Reinf. 12 Tension Rupture	60.2%	Pass
101 - 100.75	Pole + Reinf.	TP27.93x27.882x0.725	Reinf. 12 Tension Rupture	80.1%	Pass
100.75 - 95.75	Pole + Reinf.	TP28.87x27.93x0.7125	Reinf. 12 Tension Rupture	85.7%	Pass
95.75 - 92.16	Pole + Reinf.	TP30.36x28.87x0.7	Reinf. 12 Tension Rupture	89.6%	Pass
92.16 - 86.83	Pole + Reinf.	TP29.924x28.92x0.9375	Reinf. 12 Tension Rupture	74.1%	Pass
86.83 - 81.83	Pole + Reinf.	TP30.865x29.924x0.925	Reinf. 12 Tension Rupture	78.2%	Pass
81.83 - 81.5	Pole + Reinf.	TP30.927x30.865x0.925	Reinf. 12 Tension Rupture	78.4%	Pass
81.5 - 81.25	Pole + Reinf.	TP30.974x30.927x0.95	Reinf. 11 Tension Rupture	66.6%	Pass
81.25 - 76.25	Pole + Reinf.	TP31.915x30.974x0.925	Reinf. 11 Tension Rupture	69.9%	Pass
76.25 - 71.25	Pole + Reinf.	TP32.856x31.915x0.9	Reinf. 11 Tension Rupture	73.1%	Pass
71.25 - 66.25	Pole + Reinf.	TP33.797x32.856x0.875	Reinf. 11 Tension Rupture	76.2%	Pass
66.25 - 61.25	Pole + Reinf.	TP34.738x33.797x0.8625	Reinf. 11 Tension Rupture	79.1%	Pass
61.25 - 56.25	Pole + Reinf.	TP35.679x34.738x0.85	Reinf. 11 Tension Rupture	82.0%	Pass
56.25 - 51.25	Pole + Reinf.	TP36.619x35.679x0.825	Reinf. 11 Tension Rupture	84.8%	Pass
51.25 - 48.66	Pole + Reinf.	TP38.11x36.619x0.825	Reinf. 11 Tension Rupture	86.2%	Pass
48.66 - 42.33	Pole + Reinf.	TP37.546x36.357x1.0375	Reinf. 11 Tension Rupture	73.7%	Pass
42.33 - 37.4	Pole + Reinf.	TP38.473x37.546x1.025	Reinf. 11 Tension Rupture	75.9%	Pass
37.4 - 37.15	Pole + Reinf.	TP38.52x38.473x1.025	Reinf. 7 Tension Rupture	76.0%	Pass
37.15 - 32.15	Pole + Reinf.	TP39.459x38.52x1	Reinf. 7 Tension Rupture	78.2%	Pass
32.15 - 27.15	Pole + Reinf.	TP40.399x39.459x0.975	Reinf. 7 Tension Rupture	80.3%	Pass
27.15 - 22.15	Pole + Reinf.	TP41.338x40.399x0.9625	Reinf. 7 Tension Rupture	82.3%	Pass
22.15 - 19.5	Pole + Reinf.	TP41.836x41.338x0.95	Reinf. 7 Tension Rupture	83.4%	Pass
19.5 - 19.25	Pole + Reinf.	TP41.883x41.836x1.025	Reinf. 7 Tension Rupture	78.0%	Pass
19.25 - 14.25	Pole + Reinf.	TP42.822x41.883x1	Reinf. 7 Tension Rupture	79.8%	Pass
14.25 - 9.25	Pole + Reinf.	TP43.762x42.822x1	Reinf. 7 Tension Rupture	81.6%	Pass
9.25 - 9	Pole + Reinf.	TP43.809x43.762x1	Reinf. 7 Tension Rupture	81.7%	Pass
9 - 8.75	Pole + Reinf.	TP43.856x43.809x1.025	Reinf. 7 Tension Rupture	78.8%	Pass
8.75 - 7	Pole + Reinf.	TP44.185x43.856x1.025	Reinf. 7 Tension Rupture	79.3%	Pass
7 - 6.75	Pole + Reinf.	TP44.232x44.185x0.975	Reinf. 7 Tension Rupture	82.5%	Pass
6.75 - 5	Pole + Reinf.	TP44.561x44.232x0.975	Reinf. 7 Tension Rupture	83.1%	Pass
5 - 4.75	Pole + Reinf.	TP44.607x44.561x1.45	Reinf. 3 Connection	65.6%	Pass
4.75 - 3	Pole + Reinf.	TP44.936x44.607x1.425	Reinf. 3 Connection	66.1%	Pass
3 - 2.75	Pole + Reinf.	TP44.983x44.936x1.45	Reinf. 7 Tension Rupture	58.4%	Pass
2.75 - 2.25	Pole + Reinf.	TP45.077x44.983x1.45	Reinf. 7 Tension Rupture	58.5%	Pass
2.25 - 2	Pole + Reinf.	TP45.124x45.077x1.2	Reinf. 8 Tension Rupture	70.3%	Pass
2 - 0	Pole + Reinf.	TP45.5x45.124x1.175	Reinf. 8 Tension Rupture	70.9%	Pass
				Summary	
			Pole	84.6%	Pass
			Reinforcement	89.6%	Pass
			Overall	89.6%	Pass

# Additional Calculations

Section Elevation (ft)	Moment of Inertia (in <sup>4</sup> )			Area (in <sup>2</sup> )			% Capacity*												
	Pole	Reinf.	Total	Pole	Reinf.	Total	Pole	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12
169 - 164	426	n/a	426	12.86	n/a	12.86	3.6%												
164 - 159	506	n/a	506	13.62	n/a	13.62	12.4%												
159 - 154	596	n/a	596	14.37	n/a	14.37	28.7%												
154 - 149	695	n/a	695	15.13	n/a	15.13	40.5%												
149 - 144	804	n/a	804	15.89	n/a	15.89	52.0%												
144 - 139	925	n/a	925	16.65	n/a	16.65	61.9%												
139 - 136.66	985	n/a	985	17.00	n/a	17.00	66.1%												
136.66 - 131.66	1298	n/a	1298	21.62	n/a	21.62	62.8%												
131.66 - 126.66	1474	n/a	1474	22.56	n/a	22.56	68.7%												
126.66 - 121.66	1664	n/a	1664	23.49	n/a	23.49	74.5%												
121.66 - 116.66	1870	n/a	1870	24.42	n/a	24.42	79.5%												
116.66 - 111.66	2093	n/a	2093	25.36	n/a	25.36	84.0%												
111.66 - 111	2124	n/a	2124	25.48	n/a	25.48	84.6%												
111 - 110.75	2135	1674	3809	25.53	18.00	43.53	47.1%					76.1%							
110.75 - 105.75	2378	1790	4168	26.46	18.00	44.46	51.2%					82.6%							
105.75 - 101.5	2598	1892	4491	27.25	18.00	45.25	54.5%					87.9%							
101.5 - 101.25	2612	5093	7705	27.30	48.00	75.30	32.0%					51.7%							59.9%
101.25 - 101	2625	5109	7734	27.35	48.00	75.35	32.2%					51.9%							60.2%
101 - 100.75	2639	3215	5853	27.39	30.00	57.39	42.8%												80.1%
100.75 - 95.75	2918	3424	6342	28.32	30.00	58.32	45.9%												85.7%
95.75 - 92.16	3129	3578	6707	28.99	30.00	58.99	48.0%												89.6%
92.16 - 86.83	3878	5292	9170	35.17	43.50	78.67	39.8%				70.0%								74.1%
86.83 - 81.83	4261	5615	9876	36.29	43.50	79.79	42.0%				73.9%								78.2%
81.83 - 81.5	4287	5636	9923	36.36	43.50	79.86	42.1%				74.1%								78.4%
81.5 - 81.25	4307	5911	10218	36.42	45.00	81.42	41.1%												66.6%
81.25 - 76.25	4716	6257	10974	37.54	45.00	82.54	43.2%												69.9%
76.25 - 71.25	5151	6613	11765	38.66	45.00	83.66	45.2%												73.1%
71.25 - 66.25	5612	6979	12591	39.78	45.00	84.78	47.2%												76.2%
66.25 - 61.25	6099	7355	13455	40.90	45.00	85.90	49.1%												79.1%
61.25 - 56.25	6614	7741	14356	42.02	45.00	87.02	50.9%												82.0%
56.25 - 51.25	7157	8137	15295	43.14	45.00	88.14	52.9%												84.8%
51.25 - 48.66	7450	8346	15796	43.72	45.00	88.72	54.0%												86.2%
48.66 - 42.33	7721	12538	20258	44.24	69.00	113.24	47.0%		71.5%										73.7%
42.33 - 37.4	8312	13139	21452	45.34	69.00	114.34	48.8%		73.7%										75.9%
37.4 - 37.15	8343	13170	21513	45.40	69.00	114.40	48.9%		73.8%					76.0%		71.9%			
37.15 - 32.15	8975	13796	22771	46.52	69.00	115.52	50.6%		75.9%					78.2%		74.0%			
32.15 - 27.15	9638	14436	24074	47.64	69.00	116.64	52.4%		78.0%					80.3%		76.0%			
27.15 - 22.15	10332	15091	25423	48.75	69.00	117.75	54.1%		80.0%					82.3%		78.0%			
22.15 - 19.5	10714	15444	26158	49.35	69.00	118.35	55.0%		81.0%					83.4%		79.0%			
19.5 - 19.25	10750	17315	28066	49.40	77.50	126.90	51.4%	74.3%						78.0%		72.8%			
19.25 - 14.25	11497	18072	29569	50.52	77.50	128.02	53.0%	76.0%						79.8%		74.6%			
14.25 - 9.25	12277	18845	31122	51.64	77.50	129.14	54.6%	77.7%						81.6%		76.3%			
9.25 - 9	12317	18884	31201	51.70	77.50	129.20	54.7%	77.8%						81.7%		76.3%			
9 - 8.75	12357	20125	32482	51.75	82.50	134.25	52.7%	75.0%						78.8%			64.7%		
8.75 - 7	12640	20418	33058	52.14	82.50	134.64	53.3%	75.5%						79.3%			65.2%		
7 - 6.75	12680	19237	31918	52.20	77.50	129.70	55.4%	78.6%						82.5%	77.1%				
6.75 - 5	12968	19515	32482	52.59	77.50	130.09	55.9%	79.2%						83.1%	77.7%				
5 - 4.75	13009	33772	46781	52.65	117.50	170.15	39.2%	56.2%		65.6%				60.3%	53.1%				
4.75 - 3	13301	34230	47531	53.04	117.50	170.54	39.7%	56.7%		66.1%				60.8%	53.5%				
3 - 2.75	13343	34565	47909	53.09	122.50	175.59	39.5%	56.1%			52.4%			58.4%	55.8%				
2.75 - 2.25	13428	34700	48127	53.20	122.50	175.70	39.6%	56.3%			52.5%			58.5%	55.9%				
2.25 - 2	13470	26940	40410	53.26	90.00	143.26	46.9%				63.0%			70.3%	70.3%				
2 - 0	13812	27354	41166	53.71	90.00	143.71	47.5%				63.5%			70.9%	70.9%				

Note: Section capacity checked in 5 degree increments.  
Rating per TIA-222-H Section 15.5.

Applied Reactions for RISA 3D	
TNX Moment =	5130 k-ft
TNX Axial =	71 kips
TNX Shear =	49 kips
Total Unfactored Axial =	59.17 kips
Side Bending Moment =	5130 k-ft
Corner Bending Moment (Mx) =	3627.5 k-ft
Corner Bending Moment (Mz) =	3627.5 k-ft

Micropile Spring Constant	Helical Anchor Spring Constant
Number of Piles = 6	Number of Piles = 6
B.C. = 117.5 in	B.C. = 300 in
Ag = 4.03 in <sup>2</sup>	Ag = 8.28 in <sup>2</sup>
E = 29000 ksi	E = 29000 ksi
Lu = 10 ft	Lu = 65 ft
k = An*E / Lu = 973.92 k/in	k = An*E / Lu = 307.85 k/in

Micropile Capacity	Helical Anchor Capacity
Max Tension from RISA = 123.138 kips	Max Tension from RISA = 94.936 kips
Anchor Type = Micropile	Anchors per = 2
Ultimate Load, Pu' = 418 kips	Helical Anchor Type = RD4500.337
An = [redacted] in <sup>2</sup>	Design Torque = 21000 ft-lbs
Capacity (Kips) = 0.8*Pu = 334.4	Ultimate Capacity = 140 kips
<b>Ratio = 123.138 / 334.4 = 36.8%</b>	Installed Torque = 15000 ft-lbs
	Installed Capacity = 100 kips
	Total Capacity = 105 kips
	<b>Ratio = 94.936 / 105 = 90.4%</b>

		Load Distribution
Micropile Effective Moment =	43406 k-in	33.7%
Anchor Effective Moment =	85442 k-in	66.3%
Total Effective Moment =	128849 k-in	

**Reaction for Helical Load transfer at Base plate:**

Moment = 3401.8 k-ft  
Axial = 47.1 kips  
Shear = 49.0 kips

# Monopole Base Plate Connection




Site Info	
BU #	828054
Site Name	South Windsor/Rt 5
Order #	529720 Rev. 0

Analysis Considerations	
TIA-222 Revision	H
Grout Considered:	No
$l_{ar}$ (in)	0

Applied Loads	
Moment (kip-ft)	3401.80
Axial Force (kips)	47.10
Shear Force (kips)	49.00

\*TIA-222-H Section 15.5 Applied

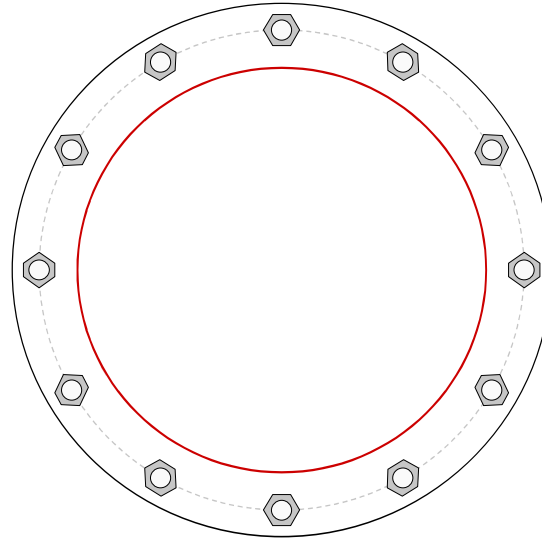

Connection Properties	Analysis Results
-----------------------	------------------

<b>Anchor Rod Data</b>
(12) 2-1/4" $\phi$ bolts (A354-BC N; $F_y=109$ ksi, $F_u=125$ ksi) on 54" BC
<b>Base Plate Data</b>
60" OD x 2.5" Plate (A572-60; $F_y=60$ ksi, $F_u=75$ ksi)
<b>Stiffener Data</b>
N/A
<b>Pole Data</b>
45.5" x 0.375" 18-sided pole (A572-65; $F_y=65$ ksi, $F_u=80$ ksi)

Anchor Rod Summary		<i>(units of kips, kip-in)</i>
$P_{u,t} = 247.88$	$\phi P_{n,t} = 304.69$	<b>Stress Rating</b>
$V_u = 4.08$	$\phi V_n = 186.38$	<b>63.1%</b>
$M_u = n/a$	$\phi M_n = n/a$	<b>Pass</b>
<b>Base Plate Summary</b>		
Max Stress (ksi):	36.22	(Flexural)
Allowable Stress (ksi):	54	
Stress Rating:	<b>63.9%</b>	<b>Pass</b>



**(Global) Model Settings**

Display Sections for Member Calcs	5
Max Internal Sections for Member Calcs	97
Include Shear Deformation?	Yes
Increase Nailing Capacity for Wind?	Yes
Include Warping?	Yes
Trans Load Btwn Intersecting Wood Wall?	Yes
Area Load Mesh (in^2)	144
Merge Tolerance (in)	.12
P-Delta Analysis Tolerance	0.50%
Include P-Delta for Walls?	Yes
Automatically Iterate Stiffness for Walls?	Yes
Max Iterations for Wall Stiffness	3
Gravity Acceleration (ft/sec^2)	32.2
Wall Mesh Size (in)	12
Eigensolution Convergence Tol. (1.E-)	4
Vertical Axis	Y
Global Member Orientation Plane	XZ
Static Solver	Sparse Accelerated
Dynamic Solver	Accelerated Solver

Hot Rolled Steel Code	None
RISAConnection Code	None
Cold Formed Steel Code	None
Wood Code	None
Wood Temperature	< 100F
Concrete Code	ACI 318-11
Masonry Code	None
Aluminum Code	None - Building
Stainless Steel Code	AISC 14th(360-10): ASD
Adjust Stiffness?	Yes(Iterative)

Number of Shear Regions	4
Region Spacing Increment (in)	4
Biaxial Column Method	Exact Integration
Parme Beta Factor (PCA)	.65
Concrete Stress Block	Rectangular
Use Cracked Sections?	Yes
Use Cracked Sections Slab?	Yes
Bad Framing Warnings?	No
Unused Force Warnings?	Yes
Min 1 Bar Diam. Spacing?	No
Concrete Rebar Set	REBAR_SET_ASTMA615
Min % Steel for Column	1
Max % Steel for Column	8



**(Global) Model Settings, Continued**

Seismic Code	ASCE 7-10
Seismic Base Elevation (ft)	Not Entered
Add Base Weight?	Yes
Ct X	.02
Ct Z	.02
T X (sec)	Not Entered
T Z (sec)	Not Entered
R X	3
R Z	3
Ct Exp. X	.75
Ct Exp. Z	.75
SD1	1
SDS	1
S1	1
TL (sec)	5
Risk Cat	I or II
Drift Cat	Other
Om Z	1
Om X	1
Cd Z	1
Cd X	1
Rho Z	1
Rho X	1

**Hot Rolled Steel Properties**

	Label	E [ksi]	G [ksi]	Nu	Therm (/1E...	Density[k/ft...	Yield[ksi]	Ry	Fu[ksi]	Rt
1	A36 Gr.36	29000	11154	.3	.65	.49	36	1.5	58	1.2
2	A572 Gr.50	29000	11154	.3	.65	.49	50	1.1	65	1.1
3	A992	29000	11154	.3	.65	.49	50	1.1	65	1.1
4	A500 Gr.42	29000	11154	.3	.65	.49	42	1.4	58	1.3
5	A500 Gr.46	29000	11154	.3	.65	.49	46	1.4	58	1.3

**General Material Properties**

	Label	E [ksi]	G [ksi]	Nu	Therm (/1E5 F)	Density[k/ft^3]
1	gen Conc3NW	3155	1372	.15	.6	.145
2	gen_Conc4NW	3644	1584	.15	.6	.145
3	gen_Conc3LW	2085	906	.15	.6	.11
4	gen_Conc4LW	2408	1047	.15	.6	.11
5	gen Alum	10600	4077	.3	1.29	.173
6	gen_Steel	29000	11154	.3	.65	.49
7	RIGID	1e+6		.3	0	0

**Hot Rolled Steel Section Sets**

	Label	Shape	Type	Design List	Material	Design Rules	A [in2]	Iyy [in4]	Izz [in4]	J [in4]
1	HR1A	W10X33	Beam	None	A36 Gr.36	Typical	9.71	36.6	171	.583

**Joint Coordinates and Temperatures**

	Label	X [ft]	Y [ft]	Z [ft]	Temp [F]	Detach From Di...
1	CENTER	0	0	0	0	
2	N2	0	0	12.49995	0	
3	N4	10.824885	0	6.249975	0	
4	N6	10.824885	0	-6.249975	0	



**Joint Coordinates and Temperatures (Continued)**

	Label	X [ft]	Y [ft]	Z [ft]	Temp [F]	Detach From Di...
5	N8	-0.	0	-12.49995	0	
6	N10	-10.824885	0	-6.249975	0	
7	N12	-10.824885	0	6.249975	0	
8	N8A	4.895638	0	0	0	
9	N10A	2.447819	0	-4.239899	0	
10	N12A	-2.447819	0	-4.239899	0	
11	N14	-4.895638	0	0.	0	
12	N16	-2.447819	0	4.239899	0	
13	N18	2.447819	0	4.239899	0	

**Joint Boundary Conditions**

	Joint Label	X [k/in]	Y [k/in]	Z [k/in]	X Rot,[k-ft/rad]	Y Rot,[k-ft/rad]	Z Rot,[k-ft/rad]
1	N14	Reaction	S973.92	Reaction			
2	N16	Reaction	S973.92	Reaction			
3	N18	Reaction	S973.92	Reaction			
4	N8A	Reaction	S973.92	Reaction			
5	N10A	Reaction	S973.92	Reaction			
6	N12A	Reaction	S973.92	Reaction			
7	N10	Reaction	S307.85	Reaction			
8	N8	Reaction	S307.85	Reaction			
9	N6	Reaction	S307.85	Reaction			
10	N4	Reaction	S307.85	Reaction			
11	N2	Reaction	S307.85	Reaction			
12	N12	Reaction	S307.85	Reaction			
13	CENTER						

**Member Primary Data**

	Label	I Joint	J Joint	K Joint	Rotate(deg)	Section/Shape	Type	Design List	Material	Design Rules
1	M1	CENTER	N2			RIGID	None	None	RIGID	Typical
2	M2	CENTER	N4			RIGID	None	None	RIGID	Typical
3	M3	CENTER	N6			RIGID	None	None	RIGID	Typical
4	M4	CENTER	N8			RIGID	None	None	RIGID	Typical
5	M5	CENTER	N10			RIGID	None	None	RIGID	Typical
6	M6	CENTER	N12			RIGID	None	None	RIGID	Typical
7	M7	CENTER	N8A			RIGID	None	None	RIGID	Typical
8	M8	CENTER	N10A			RIGID	None	None	RIGID	Typical
9	M9	CENTER	N12A			RIGID	None	None	RIGID	Typical
10	M10	CENTER	N14			RIGID	None	None	RIGID	Typical
11	M11	CENTER	N16			RIGID	None	None	RIGID	Typical
12	M12	CENTER	N18			RIGID	None	None	RIGID	Typical

**Load Combinations**

	Description	So...P...	S...	BLC Factor	BLC	Fact..B.....	BLC Fact..	BLC Fact..	BLC Fact..	BLC Fact..	BLC Fact..	BLC Fact..
1	1.2 Dead + Wind 0	Yes	Y	1	1.2	2	1					
2	0.9 Dead + Wind 0	Yes	Y	1	.9	2	1					
3	1.2 Dead + Wind ...	Yes	Y	1	1.2	3	1					
4	0.9 Dead + Wind ...	Yes	Y	1	.9	3	1					
5	1.2 Dead + Wind ...	Yes	Y	1	1.2	4	1					
6	0.9 Dead + Wind ...	Yes	Y	1	.9	4	1					
7	1.2 Dead + Wind ...	Yes	Y	1	1.2	5	1					
8	0.9 Dead + Wind ...	Yes	Y	1	.9	5	1					
9	1.2 Dead + Wind ...	Yes	Y	1	1.2	6	1					





**Load Combinations (Continued)**

	Description	So...	P...	S...	BLC Factor	BLC	Fact..B.....	BLC Fact..	BLC Fact..	BLC Fact..	BLC Fact..	BLC Fact..	BLC Fact..	BLC Fact..
10	0.9 Dead + Wind ...	Yes	Y		1 .9	6	1							
11	1.2 Dead + Wind ...	Yes	Y		1 1.2	2	-1							
12	0.9 Dead + Wind ...	Yes	Y		1 .9	2	-1							
13	1.2 Dead + Wind ...	Yes	Y		1 1.2	3	-1							
14	0.9 Dead + Wind ...	Yes	Y		1 .9	3	-1							
15	1.2 Dead + Wind ...	Yes	Y		1 1.2	4	-1							
16	0.9 Dead + Wind ...	Yes	Y		1 .9	4	-1							
17	1.2 Dead + Wind ...	Yes	Y		1 1.2	5	-1							
18	0.9 Dead + Wind ...	Yes	Y		1 .9	5	-1							
19	1.2 Dead + Wind ...	Yes	Y		1 1.2	6	-1							
20	0.9 Dead + Wind ...	Yes	Y		1 .9	6	-1							

**Basic Load Cases**



	BLC Description	Category	X Gravity	Y Gravity	Z Gravity	Joint	Point	Distributed Area(Me...	Surface(P...
1	Dead	None		-1		1			
2	Wind 0	None				1			
3	Wind 30	None				2			
4	Wind 45	None				2			
5	Wind 60	None				2			
6	Wind 90	None				1			



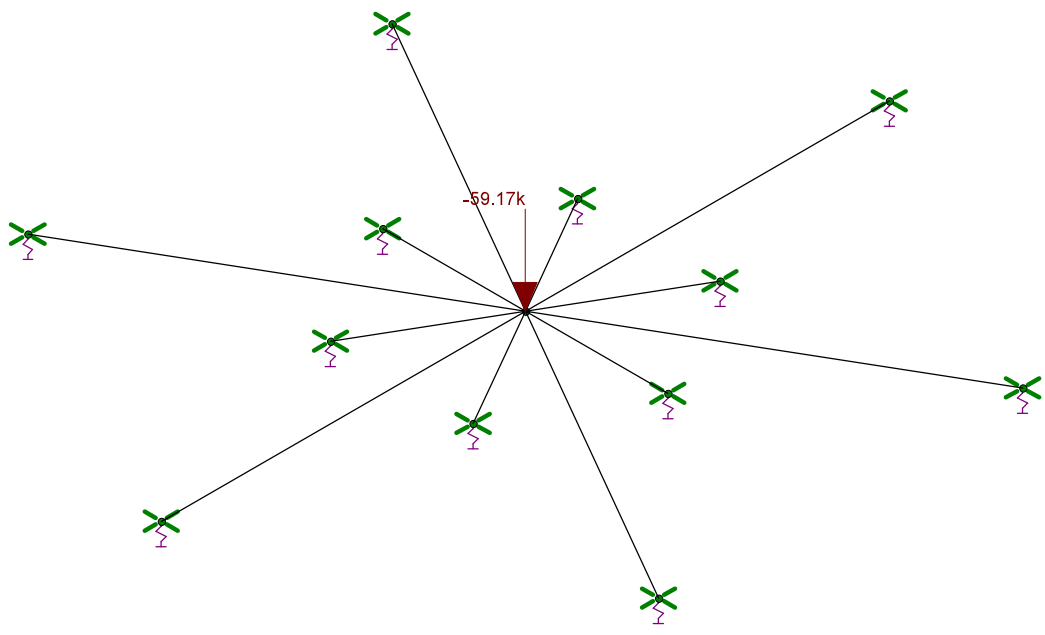



Loads: BLC 1, Dead

Paul J. Ford and Company	BU 828054 / South Windsor- Rt 5	SK - 1
KAT/GP		Oct 23, 2020 at 3:48 PM
37519-0238.002.7805		37520-2262.001.7805_Composite ...

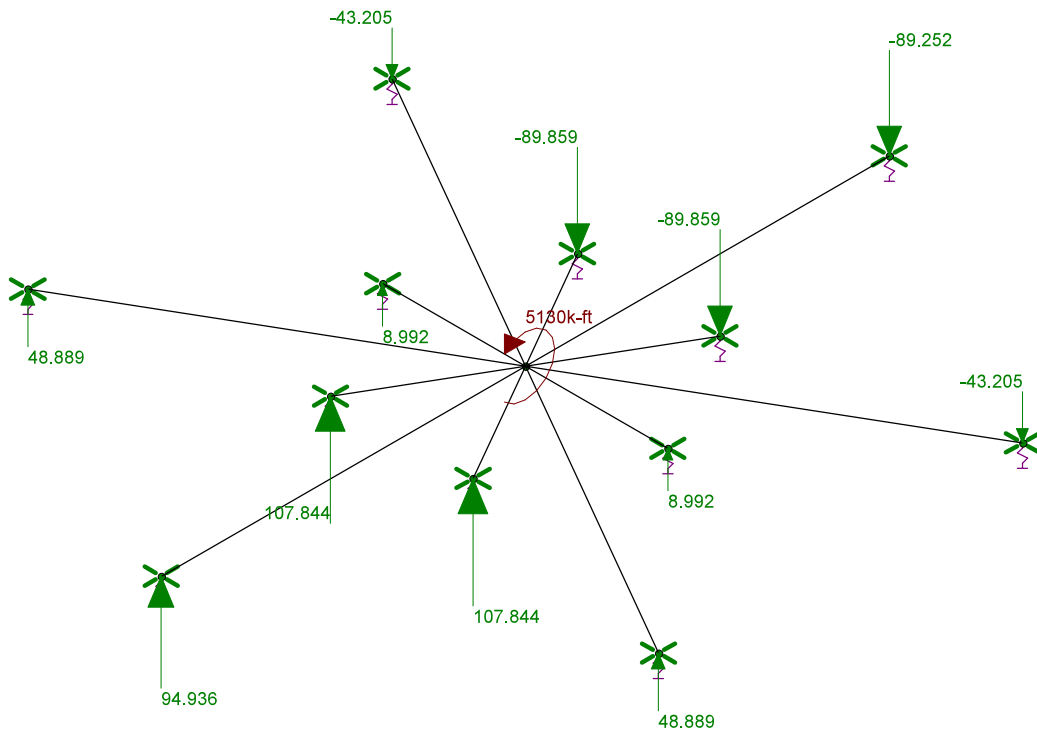



Loads: BLC 2, Wind 0  
 Results for LC 1, 1.2 Dead + Wind 0  
 Y-direction Reaction Units are k and k-ft

Paul J. Ford and Company	BU 828054 / South Windsor- Rt 5	SK - 2
KAT/GP		Oct 23, 2020 at 3:50 PM
37519-0238.002.7805		37520-2262.001.7805_Composite ...

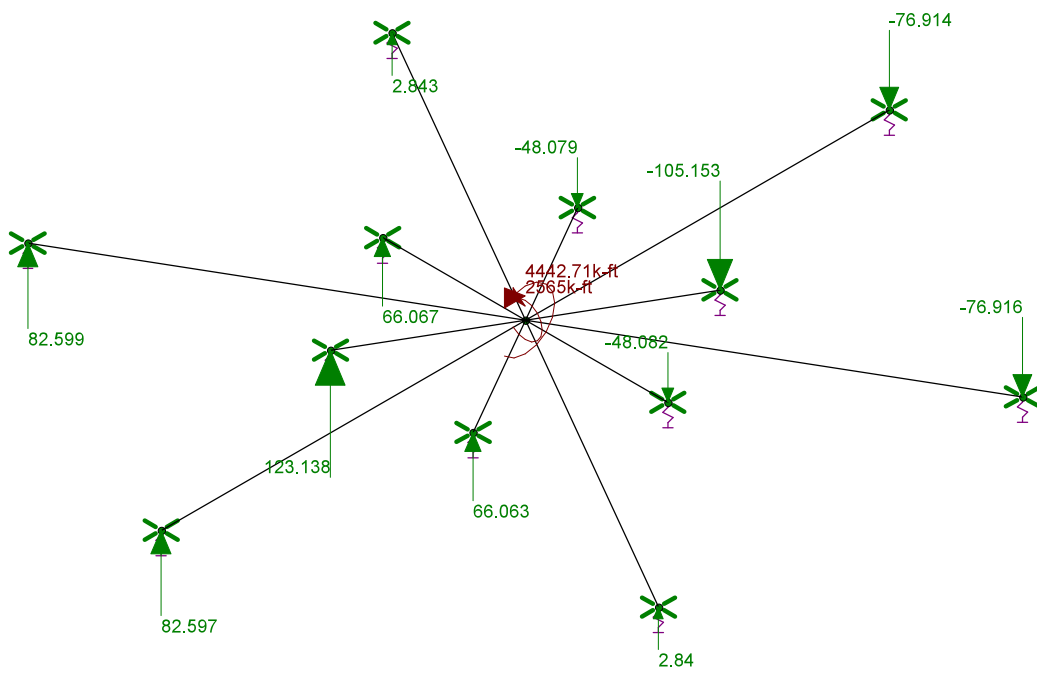



Loads: BLC 3, Wind 30  
 Results for LC 3, 1.2 Dead + Wind 30  
 Y-direction Reaction Units are k and k-ft

Paul J. Ford and Company	BU 828054 / South Windsor- Rt 5	SK - 3
KAT/GP		Oct 23, 2020 at 3:50 PM
37519-0238.002.7805		37520-2262.001.7805_Composite ...

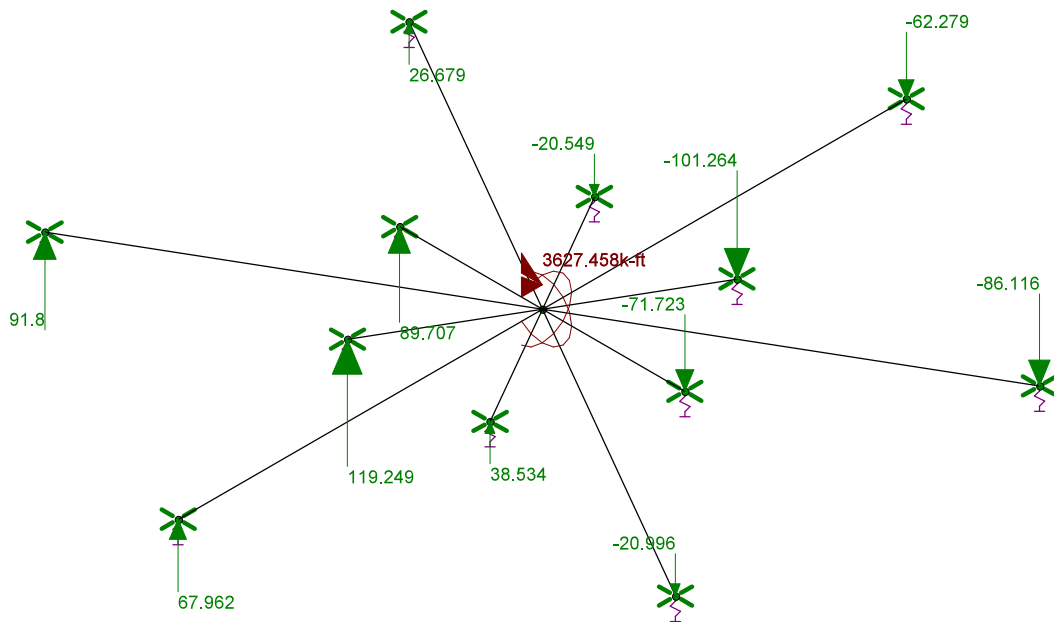



Loads: BLC 4, Wind 45  
 Results for LC 5, 1.2 Dead + Wind 45  
 Y-direction Reaction Units are k and k-ft

Paul J. Ford and Company	BU 828054 / South Windsor- Rt 5	SK - 4
KAT/GP		Oct 23, 2020 at 3:51 PM
37519-0238.002.7805		37520-2262.001.7805_Composite ...

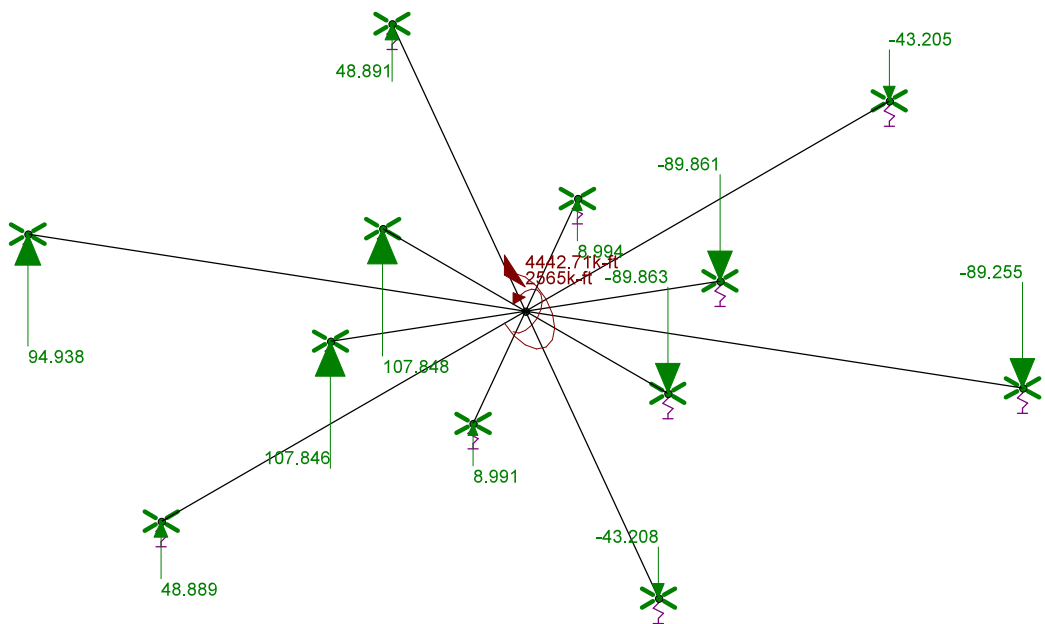

Loads: BLC 5, Wind 60  
 Results for LC 7, 1.2 Dead + Wind 60  
 Y-direction Reaction Units are k and k-ft

Paul J. Ford and Company	BU 828054 / South Windsor- Rt 5	SK - 5
KAT/GP		Oct 23, 2020 at 3:52 PM
37519-0238.002.7805		37520-2262.001.7805_Composite ...

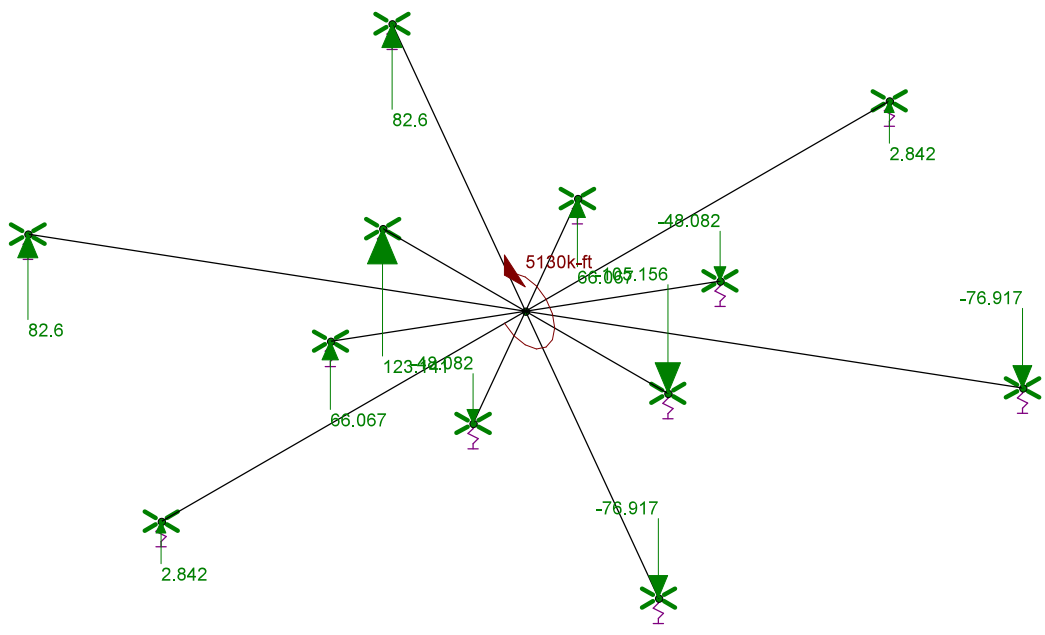

Loads: BLC 6, Wind 90  
 Results for LC 9, 1.2 Dead + Wind 90  
 Y-direction Reaction Units are k and k-ft


Paul J. Ford and Company	BU 828054 / South Windsor- Rt 5	SK - 6
KAT/GP		Oct 23, 2020 at 3:52 PM
37519-0238.002.7805		37520-2262.001.7805_Composite ...

# ASCE 7 Hazards Report

**Address:**  
300 Governors Hwy  
South Windsor, Connecticut  
06074

**Standard:** ASCE/SEI 7-10  
**Risk Category:** II  
**Soil Class:** D - Stiff Soil

**Elevation:** 70.11 ft (NAVD 88)  
**Latitude:** 41.832274  
**Longitude:** -72.603035

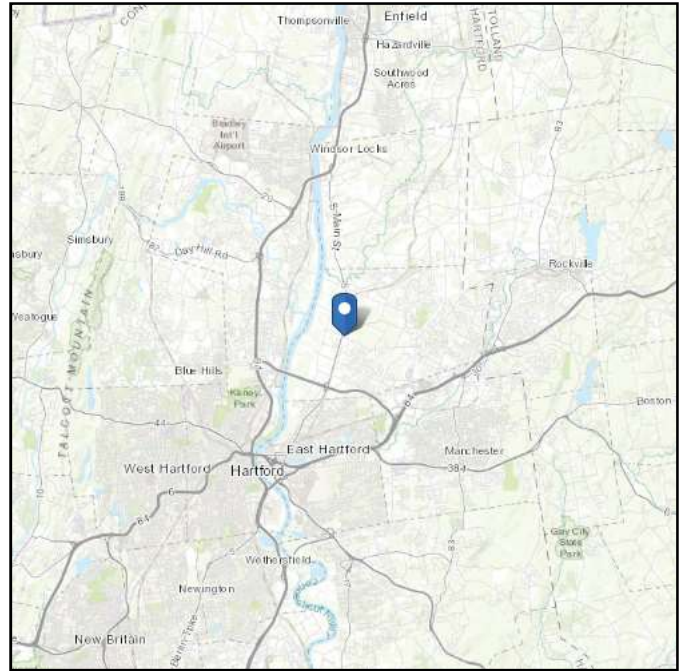

## Wind

### Results:

Wind Speed:	122 Vmph
10-year MRI	76 Vmph
25-year MRI	86 Vmph
50-year MRI	93 Vmph
100-year MRI	100 Vmph

**Data Source:** ASCE/SEI 7-10, Fig. 26.5-1A and Figs. CC-1–CC-4, incorporating errata of March 12, 2014

**Date Accessed:** Wed Jan 16 2019

Value provided is 3-second gust wind speeds at 33 ft above ground for Exposure C Category, based on linear interpolation between contours. Wind speeds are interpolated in accordance with the 7-10 Standard. Wind speeds correspond to approximately a 7% probability of exceedance in 50 years (annual exceedance probability = 0.00143, MRI = 700 years).

Site is in a hurricane-prone region as defined in ASCE/SEI 7-10 Section 26.2. Glazed openings need not be protected against wind-borne debris.



Mountainous terrain, gorges, ocean promontories, and special wind regions should be examined for unusual wind conditions.

**Site Soil Class:** D - Stiff Soil

**Results:**

$S_s$ :	0.179	$S_{DS}$ :	0.191
$S_1$ :	0.064	$S_{D1}$ :	0.102
$F_a$ :	1.6	$T_L$ :	6
$F_v$ :	2.4	PGA :	0.089
$S_{MS}$ :	0.286	PGA <sub>M</sub> :	0.143
$S_{M1}$ :	0.154	F <sub>PGA</sub> :	1.6
		$I_e$ :	1

**Seismic Design Category** B

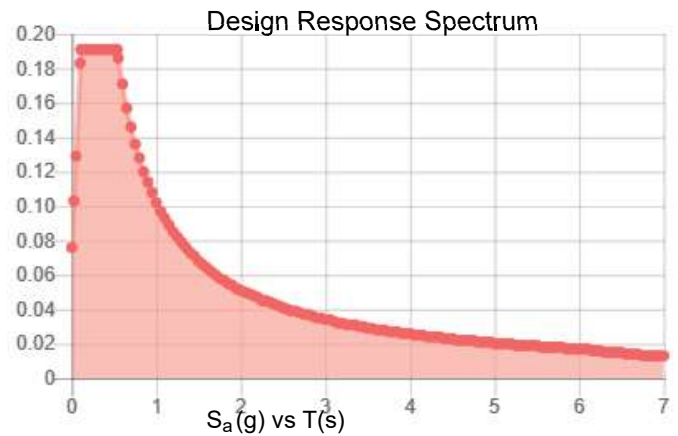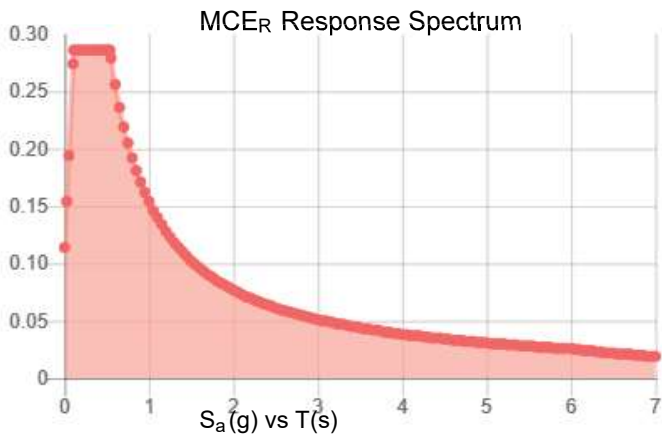

**Data Accessed:**

Wed Jan 16 2019

**Date Source:**

USGS Seismic Design Maps based on ASCE/SEI 7-10, incorporating Supplement 1 and errata of March 31, 2013, and ASCE/SEI 7-10 Table 1.5-2. Additional data for site-specific ground motion procedures in accordance with ASCE/SEI 7-10 Ch. 21 are available from USGS.



## Ice

---

### Results:

Ice Thickness: 1.00 in.

Concurrent Temperature: 5 F

Gust Speed: 50 mph

**Data Source:** Standard ASCE/SEI 7-10, Figs. 10-2 through 10-8

**Date Accessed:** Wed Jan 16 2019

Ice thicknesses on structures in exposed locations at elevations higher than the surrounding terrain and in valleys and gorges may exceed the mapped values.

Values provided are equivalent radial ice thicknesses due to freezing rain with concurrent 3-second gust speeds, for a 50-year mean recurrence interval, and temperatures concurrent with ice thicknesses due to freezing rain. Thicknesses for ice accretions caused by other sources shall be obtained from local meteorological studies. Ice thicknesses in exposed locations at elevations higher than the surrounding terrain and in valleys and gorges may exceed the mapped values.

---

The ASCE 7 Hazard Tool is provided for your convenience, for informational purposes only, and is provided “as is” and without warranties of any kind. The location data included herein has been obtained from information developed, produced, and maintained by third party providers; or has been extrapolated from maps incorporated in the ASCE 7 standard. While ASCE has made every effort to use data obtained from reliable sources or methodologies, ASCE does not make any representations or warranties as to the accuracy, completeness, reliability, currency, or quality of any data provided herein. Any third-party links provided by this Tool should not be construed as an endorsement, affiliation, relationship, or sponsorship of such third-party content by or from ASCE.

ASCE does not intend, nor should anyone interpret, the results provided by this Tool to replace the sound judgment of a competent professional, having knowledge and experience in the appropriate field(s) of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the contents of this Tool or the ASCE 7 standard.

In using this Tool, you expressly assume all risks associated with your use. Under no circumstances shall ASCE or its officers, directors, employees, members, affiliates, or agents be liable to you or any other person for any direct, indirect, special, incidental, or consequential damages arising from or related to your use of, or reliance on, the Tool or any information obtained therein. To the fullest extent permitted by law, you agree to release and hold harmless ASCE from any and all liability of any nature arising out of or resulting from any use of data provided by the ASCE 7 Hazard Tool.

# Exhibit E

## **Mount Analysis**

Date: **October 9, 2020**

**INFINIGY**  
FROM ZERO TO INFINIGY  
the solutions are endless  
Infinigy Engineering, PLLC  
1033 Watervliet Shaker Road  
Albany, NY 12205  
518-690-0790  
structural@infinigy.com

Darcy Tarr  
Crown Castle  
3530 Toringdon Way, Suite 300  
Charlotte, NC 28277  
(704) 405-6589

**Subject: Mount Analysis Report**

**Carrier Designation: T-Mobile Anchor**  
**Carrier Site Number: CT11279D**  
**Carrier Site Name: South Windsor/Rt 5**

**Crown Castle Designation: Crown Castle BU Number: 828054**  
**Crown Castle Site Name: South Windsor/Rt 5**  
**Crown Castle JDE Job Number: 620142**  
**Crown Castle Order Number: 529720 Rev. 0**

**Engineering Firm Designation: Infinigy Engineering, PLLC Report Designation: 1039-Z0001-B**

**Site Data: 300 Governors Highway, South Windsor, Hartford County, CT 06074**  
**Latitude 41°50'0.40" Longitude -72°36'11.00"**

**Structure Information: Tower Height & Type: 169.0 ft Monopole**  
**Mount Elevation: 165.0 ft**  
**Mount Type: 12.5 ft Platform**

Dear Darcy Tarr,

Infinigy Engineering, PLLC is pleased to submit this "**Mount Analysis Report**" to determine the structural integrity of T-Mobile's antenna mounting system with the proposed appurtenance and equipment addition on the abovementioned supporting tower structure. Analysis of the existing supporting tower structure is to be completed by others and therefore is not part of this analysis. Analysis of the antenna mounting system as a tie-off point for fall protection or rigging is not part of this document.


The purpose of the analysis is to determine acceptability of the mount stress level. Based on our analysis we have determined the mount stress level to be:

**Platform** **Sufficient**  
**\*Sufficient upon completion of the changes listed in the 'Recommendations' section of this report.**

This analysis utilizes an ultimate 3-second gust wind speed of 125 mph as required by the 2018 Connecticut State Building Code. Applicable Standard references and design criteria are listed in Section 2 - Analysis Criteria.

Mount analysis prepared by: Jacques Grimaldi, M.S., P.E.

Respectfully Submitted by:  
John S. Stevens, P.E.  
518-690-0790  
[structural@infinigy.com](mailto:structural@infinigy.com)  
CT PE License No. PEN.0024705

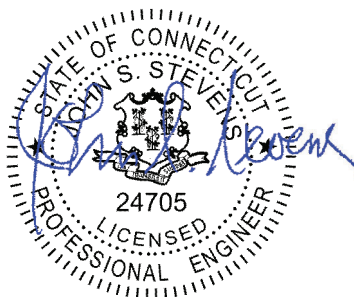

Date Stamped: 10/09/20

## TABLE OF CONTENTS

### 1) INTRODUCTION

### 2) ANALYSIS CRITERIA

Table 1 - Proposed Equipment Configuration

### 3) ANALYSIS PROCEDURE

Table 2 - Documents Provided

3.1) Analysis Method

3.2) Assumptions

### 4) ANALYSIS RESULTS

Table 3 - Mount Component Stresses vs. Capacity

4.1) Recommendations

### 5) APPENDIX A

Wire Frame and Rendered Models

### 6) APPENDIX B

Software Input Calculations

### 7) APPENDIX C

Software Analysis Output

### 8) APPENDIX D

Additional Calculations

**1) INTRODUCTION**

This is an existing 3 sector 12.5 ft Platform, designed by EEI.

**2) ANALYSIS CRITERIA**

<b>Building Code:</b>	2015 IBC / 2018 Connecticut State Building Code
<b>TIA-222 Revision:</b>	TIA-222-H
<b>Risk Category:</b>	II
<b>Ultimate Wind Speed:</b>	125 mph
<b>Exposure Category:</b>	C
<b>Topographic Factor at Base:</b>	1.0
<b>Topographic Factor at Mount:</b>	1.0
<b>Ice Thickness:</b>	2.0 in
<b>Wind Speed with Ice:</b>	50 mph
<b>Seismic S<sub>s</sub>:</b>	0.178
<b>Seismic S<sub>1</sub>:</b>	0.064
<b>Live Loading Wind Speed:</b>	30 mph
<b>Man Live Load at Mid/End-Points:</b>	250 lb
<b>Man Live Load at Mount Pipes:</b>	500 lb

**Table 1 - Proposed Equipment Configuration**

Mount Centerline (ft)	Antenna Centerline (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Mount / Modification Details
165.0	166.0	3	ERICSSON	AIR 32 B2A/B66AA	12.5 ft Platform
		3	ERICSSON	AIR6449 B41_T-MOBILE	
		3	RFS/CELWAVE	APXVAARR24_43-U-NA20	
		3	COMMSCOPE	SDX1926Q-43	
		3	ERICSSON	RRUS 4415 B25_CCIV2	
		3	ERICSSON	RADIO 4449 B12/B71	
	165.0	3	ERICSSON	KRY 112 144/1	

**3) ANALYSIS PROCEDURE**

**Table 2 - Documents Provided**

Document	Remarks	Reference	Source
Crown Application	T-Mobile Application	529720 Rev. 0	CCI Sites
Loading Document	T-Mobile	RFDS Version: 5	TSA
Previous Mount Analysis	Infinigy Engineering, PLLC	7691951	CCI Sites
Mount Manufacturer Drawings	Site Pro 1	HRK 12	Infinigy

### 3.1) Analysis Method

RISA-3D (Version 18.0.5), a commercially available analysis software package, was used to create a three-dimensional model of the antenna mounting system and calculate member stresses for various loading cases.

Infinigy Mount Analysis Tool V2.1.4, a tool internally developed by Infinigy, was used to calculate wind loading on all appurtenances, dishes and mount members for various loading cases. Selected output from the analysis is included in Appendix B "Software Input Calculations".

This analysis was performed in accordance with Crown Castle's ENG-SOW-10208 *Tower Mount Analysis* (Revision B).

### 3.2) Assumptions

- 1) The antenna mounting system was properly fabricated, installed and maintained in good condition in accordance with its original design and manufacturer's specifications.
- 2) The configuration of antennas, mounts, and other appurtenances are as specified in Table 1 and the referenced drawings.
- 3) All member connections are assumed to have been designed to meet or exceed the load carrying capacity of the connected member unless otherwise specified in this report.
- 4) The analysis will be required to be revised if the existing conditions in the field differ from those shown in the above-referenced documents or assumed in this analysis. No allowance was made for any damaged, missing, or rusted members.
- 5) Prior structural modifications to the tower mounting system are assumed to be installed as shown per available data.
- 6) Steel grades have been assumed as follows, unless noted otherwise:
 

Channel, Solid Round, Angle, Plate	ASTM A36 (GR 36) / Q345 (GR. 36)
HSS (Rectangular)	ASTM A500 (GR B-46)
Pipe	ASTM A53 (GR 35) / Q235-GB (GR. 35)
Connection Bolts	ASTM A325

This analysis may be affected if any assumptions are not valid or have been made in error. Infinigy Engineering, PLLC should be notified to determine the effect on the structural integrity of the antenna mounting system.

## 4) ANALYSIS RESULTS

**Table 3 - Mount Component Stresses vs. Capacity (Platform, All Sectors)**

Notes	Component	Critical Member	Centerline (ft)	% Capacity	Pass / Fail
1	Horizontal(s)	M10	165.0	98.8	Pass
	Mount Pipe(s)	MP9		96.0	Pass
	Brace(s)	M1		92.2	Pass
	Handrail(s)	M52		51.8	Pass
	Mount Connection(s)	--		18.3	Pass

<b>Structure Rating (max from all components) =</b>	<b>98.8%</b>
---	--------------

Notes:

- 1) See additional documentation in "Appendix C - Software Analysis Output" for calculations supporting the % capacity consumed.

#### **4.1) Recommendations**


The mount has sufficient capacity to carry the proposed loading configuration. In order for the results of the analysis to be considered valid, the structural modifications listed below must be completed.

1. Installation of a Site Pro 1 HRK12 Handrail Kit, 42" above horizontal.


No structural modifications are required at this time, provided that the above-listed changes are implemented.

**APPENDIX A**  
**WIRE FRAME AND RENDERED MODELS**



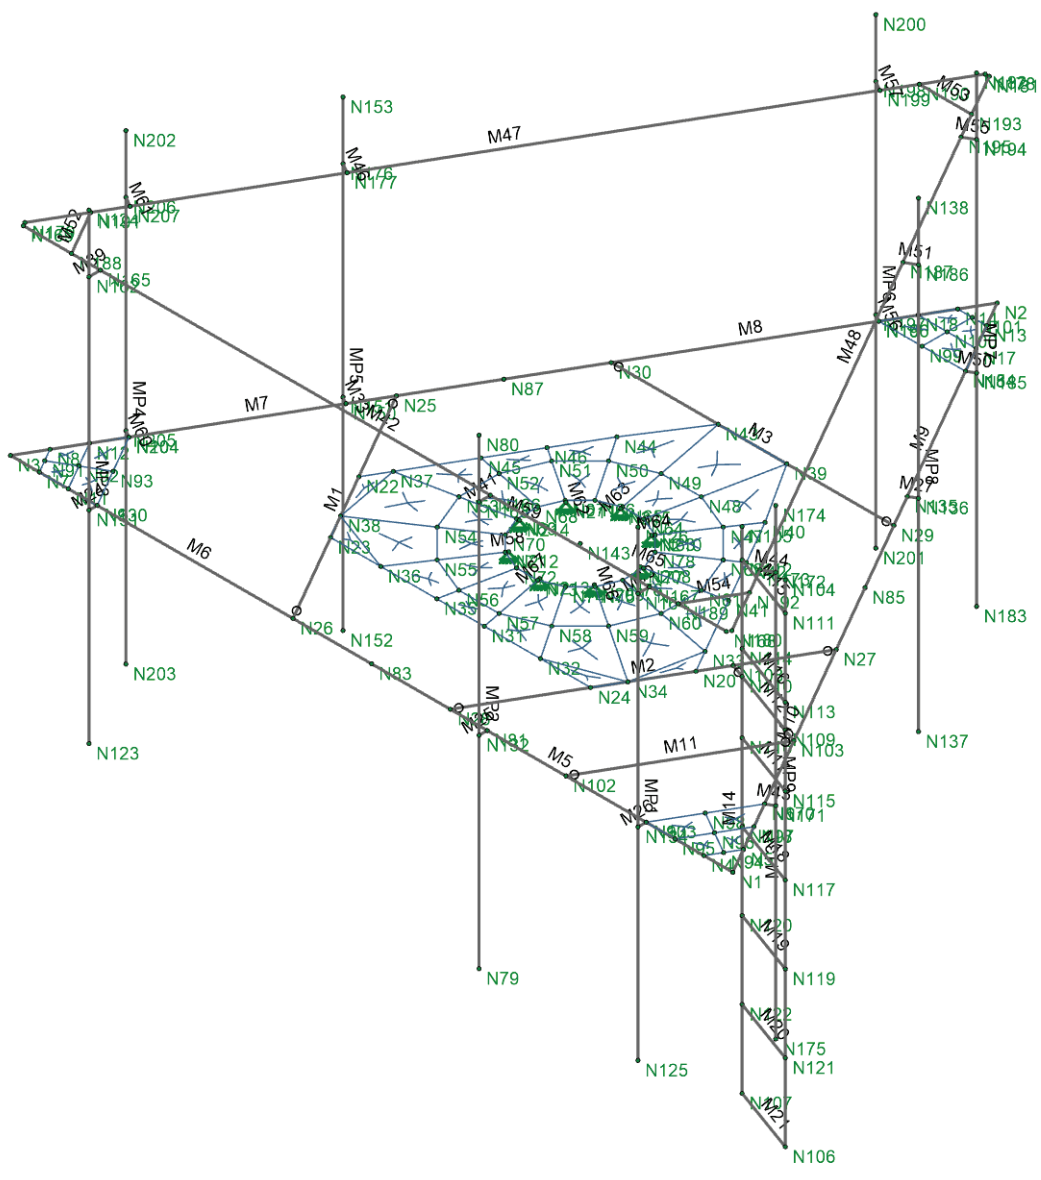

Envelope Only Solution			
Infinigy Engineering, PLLC		828054	Wire Frame
JG			Oct 10, 2020
1039-Z0001-B			828054_loaded.r3d



Envelope Only Solution

Infinigy Engineering, PLLC

JG

1039-Z0001-B

828054

Rendered

Oct 10, 2020

828054\_loaded.r3d

**APPENDIX B**  
**SOFTWARE INPUT CALCULATIONS**

## Program Inputs

PROJECT INFORMATION		
Client:	Crown Castle	
Carrier:	T-Mobile	
Engineer:	Jacques Grimaldi	

SITE INFORMATION		
Risk Category:	II	
Exposure Category:	C	
Topo Factor Procedure:	Method 1, Category 1	
Site Class:	D - Stiff Soil	
Ground Elevation:	70	ft *Rev H

MOUNT INFORMATION		
Mount Type:	Platform	
Num Sectors:	3	
Centerline AGL:	165.0	ft
Tower Height AGL:	169.0	ft

TOPOGRAPHIC DATA		
Topo Feature:	N/A	
Slope Distance:	N/A	ft
Crest Distance:	N/A	ft
Crest Height:	N/A	ft

FACTORS		
Directionality Fact. ( $K_d$ ):	0.95	
Ground Ele. Factor ( $K_e$ ):	1.00	*Rev H Only
Rooftop Speed-Up ( $K_s$ ):	1.00	*Rev H Only
Topographic Factor ( $K_{zt}$ ):	1.00	
Gust Effect Factor ( $G_h$ ):	1.0	

CODE STANDARDS		
Building Code:	2015 IBC	
TIA Standard:	TIA-222-H	
ASCE Standard:	ASCE 7-10	



WIND AND ICE DATA		
Ultimate Wind ( $V_{ult}$ ):	125	mph
Design Wind ( $V$ ):	N/A	mph
Ice Wind ( $V_{ice}$ ):	50	mph
Base Ice Thickness ( $t_i$ ):	2	in
Flat Pressure:	106.61	psf
Round Pressure:	63.97	psf
Ice Wind Pressure:	10.23	psf

SEISMIC DATA		
Short-Period Accel. ( $S_s$ ):	0.18	g
1-Second Accel. ( $S_1$ ):	0.06	g
Short-Period Design ( $S_{DS}$ ):	0.19	
1-Second Design ( $S_{D1}$ ):	0.10	
Short-Period Coeff. ( $F_a$ ):	1.60	
1-Second Coeff. ( $F_v$ ):	2.40	
Amplification Factor ( $a_p$ ):	1.00	
Response Mod. ( $R_p$ ):	2.50	
Overstrength ( $\Omega_o$ ):	1.00	



Infinigy Load Calculator V2.1.4

# Program Inputs

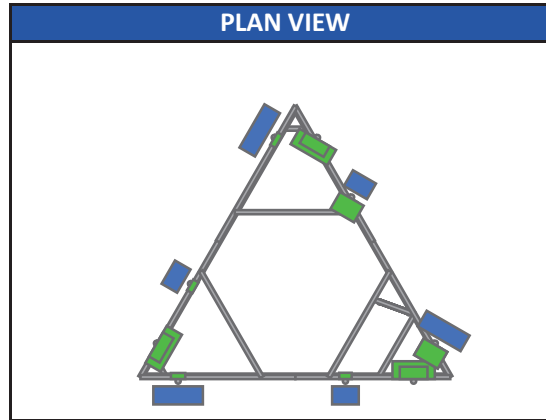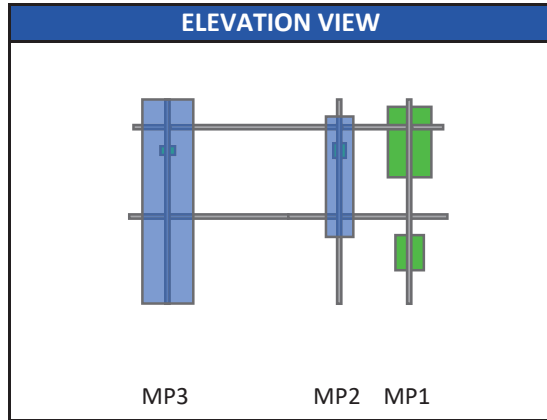

Infinigy Load Calculator V2.1.4

APPURTENANCE INFORMATION												
Appurtenance Name	Elevation	Qty.	K <sub>a</sub>	q <sub>z</sub> (psf)	EPA <sub>N</sub> (ft <sup>2</sup> )	EPA <sub>T</sub> (ft <sup>2</sup> )	Wind F <sub>z</sub> (lbs)	Wind F <sub>x</sub> (lbs)	Weight (lbs)	Seismic F (lbs)	Member (α sector)	
ERICSSON AIR 32 B2A/B66AA	166.0	3	0.90	53.37	6.51	4.71	312.71	226.36	132.20	12.55	MP2	
ERICSSON AIR6449 B41_T-MOBILE	166.0	3	0.90	53.37	5.66	2.48	271.84	118.96	114.63	10.88	MP1	
RFS/CELWAVE APXVAARR24_43-U-NA2C	166.0	3	0.90	53.37	14.69	6.87	705.82	330.17	96.80	9.19	MP3	
COMMSCOPE SDX1926Q-43	166.0	3	0.90	53.37	0.24	0.10	11.57	4.86	6.17	0.59	MP3	
ERICSSON TME-KRY 112 144/1	165.0	3	0.90	53.31	0.35	0.18	16.79	8.40	11.00	1.04	MP2	
ERICSSON RADIO 4449 B12/B71	166.0	1	0.90	53.37	1.64	1.15	78.94	55.36	75.00	7.12	Leg/Flush	
ERICSSON RADIO 4449 B12/B71	166.0	1	0.90	53.37	1.64	1.15	78.94	55.36	75.00	7.12	Leg/Flush	
ERICSSON RADIO 4449 B12/B71	166.0	1	0.90	53.37	1.64	1.15	78.94	55.36	75.00	7.12	Leg/Flush	
ERICSSON TME-RRUS 4415 B25_CCIV2	166.0	3	0.90	53.37	1.84	0.82	88.51	39.40	46.00	4.37	MP1	

**APPENDIX C**  
**SOFTWARE ANALYSIS OUTPUT**

**Member Primary Data**

	Label	I Node	J Node	Rotate(deg)	Section/Shape	Type	Design List	Material	Design Rule
1	M1	N25	N26		Channel	Beam	Channel	A36 Gr.36	Typical
2	M2	N27	N28	180	Channel	Beam	Channel	A36 Gr.36	Typical
3	M3	N29	N30		Channel	Beam	Channel	A36 Gr.36	Typical
4	MP2	N80	N79		Mount Pipe	Column	Pipe	A53 Gr.B	Typical
5	M5	N1	N83		Frame Rail	Beam	Channel	A36 Gr.36	Typical
6	M6	N83	N3		Frame Rail	Beam	Channel	A36 Gr.36	Typical
7	M7	N3	N87		Frame Rail	Beam	Channel	A36 Gr.36	Typical
8	M8	N87	N2		Frame Rail	Beam	Channel	A36 Gr.36	Typical
9	M9	N2	N85		Frame Rail	Beam	Channel	A36 Gr.36	Typical
10	M10	N85	N1		Frame Rail	Beam	Channel	A36 Gr.36	Typical
11	M11	N102	N103		Channel	Beam	Channel	A36 Gr.36	Typical
12	M12	N103	N108		Channel	Beam	Channel	A36 Gr.36	Typical
13	M13	N106	N104	70	Angle	Column	Single Angle	A36 Gr.36	Typical
14	M14	N107	N105	340	Angle	Column	Single Angle	A36 Gr.36	Typical
15	M15	N112	N111		Solid Rod	Beam	BAR	A36 Gr.36	Typical
16	M16	N114	N113		Solid Rod	Beam	BAR	A36 Gr.36	Typical
17	M17	N116	N115		Solid Rod	Beam	BAR	A36 Gr.36	Typical
18	M18	N118	N117		Solid Rod	Beam	BAR	A36 Gr.36	Typical
19	M19	N120	N119		Solid Rod	Beam	BAR	A36 Gr.36	Typical
20	M20	N122	N121		Solid Rod	Beam	BAR	A36 Gr.36	Typical
21	M21	N107	N106		Solid Rod	Beam	BAR	A36 Gr.36	Typical
22	MP3	N124	N123		Mount Pipe	Column	Pipe	A53 Gr.B	Typical
23	MP1	N126	N125		Mount Pipe	Column	Pipe	A53 Gr.B	Typical
24	M24	N130	N131		RIGID	None	None	RIGID	Typical
25	M25	N81	N132		RIGID	None	None	RIGID	Typical
26	M26	N133	N134		RIGID	None	None	RIGID	Typical
27	M27	N135	N136		RIGID	None	None	RIGID	Typical
28	MP8	N138	N137		Mount Pipe	Column	Pipe	A53 Gr.B	Typical
29	M33	N150	N151		RIGID	None	None	RIGID	Typical
30	MP5	N153	N152		Mount Pipe	Column	Pipe	A53 Gr.B	Typical
31	M39	N162	N165		RIGID	None	None	RIGID	Typical
32	M40	N164	N167		RIGID	None	None	RIGID	Typical
33	M41	N163	N166		RIGID	None	None	RIGID	Typical
34	M42	N169	N168		Proposed Handrail Horizontal	Beam	Pipe	Q235-GB	Typical
35	M46	N176	N177		RIGID	None	None	RIGID	Typical
36	M47	N178	N179		Proposed Handrail Horizontal	Beam	Pipe	Q235-GB	Typical
37	M48	N180	N181		Proposed Handrail Horizontal	Beam	Pipe	Q235-GB	Typical
38	M51	N186	N187		RIGID	None	None	RIGID	Typical
39	M52	N188	N191	180	Handrail Corner Angle	Column	Single Angle	Q345	Typical
40	M53	N190	N193	180	Handrail Corner Angle	Column	Single Angle	Q345	Typical
41	M54	N189	N192	90	Handrail Corner Angle	Column	Single Angle	Q345	Typical
42	M43	N170	N171		RIGID	None	None	RIGID	Typical
43	M44	N172	N173		RIGID	None	None	RIGID	Typical
44	MP9	N174	N175		Mount Pipe	Column	Pipe	A53 Gr.B	Typical
45	MP7	N182	N183		Mount Pipe	Column	Pipe	A53 Gr.B	Typical
46	M50	N184	N185		RIGID	None	None	RIGID	Typical
47	M55	N194	N195		RIGID	None	None	RIGID	Typical
48	M56	N196	N197		RIGID	None	None	RIGID	Typical
49	M57	N198	N199		RIGID	None	None	RIGID	Typical
50	MP6	N200	N201		Mount Pipe	Column	Pipe	A53 Gr.B	Typical
51	MP4	N202	N203		Mount Pipe	Column	Pipe	A53 Gr.B	Typical
52	M60	N204	N205		RIGID	None	None	RIGID	Typical
53	M61	N206	N207		RIGID	None	None	RIGID	Typical
54	M58	N71	N212		RIGID	None	None	RIGID	Typical
55	M59	N69	N214		RIGID	None	None	RIGID	Typical
56	M62	N67	N211		RIGID	None	None	RIGID	Typical
57	M63	N65	N215		RIGID	None	None	RIGID	Typical
58	M64	N63	N210		RIGID	None	None	RIGID	Typical
59	M65	N77	N208		RIGID	None	None	RIGID	Typical
60	M66	N75	N209		RIGID	None	None	RIGID	Typical
61	M67	N73	N213		RIGID	None	None	RIGID	Typical

**Material Takeoff**

	Material	Size	Pieces	Length[in]	Weight[LB]
1	General				
2	RIGID		26	40.7	0
3	Total General		26	40.7	0
4					
5	Hot Rolled Steel				
6	A36 Gr.36	0.75" SR	7	105	13.154
7	A36 Gr.36	C5X9	11	681.8	510.382
8	A36 Gr.36	L2.5x2.5x4	2	204	68.838
9	A53 Gr.B	PIPE 2.0	9	864	249.9
10	Q235-GB	PIPE 2.0	3	438	126.685
11	Q345	L2.5x2.5x3	3	32.5	8.302
12	Total HR Steel		35	2325.3	977.261
13					
14	Plate Elements	Thickness (in)		Volume (yds^3)	
15	gen Steel	0.8	48	0	605.65
16	Total Plates		48	0	605.65

**Basic Load Cases**

	BLC Description	Category	X Gravity	Y Gravity	Z Gravity	Nodal	Point	Distributed	Area(Member)	Surface(Plate/Wall)
1	Self Weight	DL		-1			30		6	
2	Wind Load AZI 0	WLZ					60			
3	Wind Load AZI 30	None					60			
4	Wind Load AZI 60	None					60			
5	Wind Load AZI 90	WLX					60			
6	Wind Load AZI 120	None					60			
7	Wind Load AZI 150	None					60			
8	Wind Load AZI 180	None					60			
9	Wind Load AZI 210	None					60			
10	Wind Load AZI 240	None					60			
11	Wind Load AZI 270	None					60			
12	Wind Load AZI 300	None					60			
13	Wind Load AZI 330	None					60			
14	Distr. Wind Load Z	WLZ						53		
15	Distr. Wind Load X	WLX						53		
16	Ice Weight	OL1					30	53	6	48
17	Ice Wind Load AZI 0	OL2					60			
18	Ice Wind Load AZI 30	None					60			
19	Ice Wind Load AZI 60	None					60			
20	Ice Wind Load AZI 90	OL3					60			
21	Ice Wind Load AZI 120	None					60			
22	Ice Wind Load AZI 150	None					60			
23	Ice Wind Load AZI 180	None					60			
24	Ice Wind Load AZI 210	None					60			
25	Ice Wind Load AZI 240	None					60			
26	Ice Wind Load AZI 270	None					60			
27	Ice Wind Load AZI 300	None					60			
28	Ice Wind Load AZI 330	None					60			
29	Distr. Ice Wind Load Z	OL2						53		
30	Distr. Ice Wind Load X	OL3						53		
31	Seismic Load Z	ELZ			-0.095		30			
32	Seismic Load X	ELX	-0.095				30			
33	Service Live Loads	LL					1			
34	Maintenance Load 1	LL					1			
35	Maintenance Load 2	LL					1			
36	Maintenance Load 3	LL					1			
37	Maintenance Load 4	LL					1			
38	Maintenance Load 5	LL					1			
39	Maintenance Load 6	LL					1			
40	Maintenance Load 7	LL					1			
41	Maintenance Load 8	LL					1			
42	Maintenance Load 9	LL					1			
43	BLC 1 Transient Area Loads	None						36		
44	BLC 16 Transient Area Loads	None						36		



**Load Combinations**

	Description	Solve	PDelta	BLC	Factor	BLC	Factor	BLC	Factor	BLC	Factor	BLC	Factor
1	1.4DL	Yes	Y	1	1.4								
2	1.2DL + 1WL AZI 0	Yes	Y	1	1.2	2	1	14	1	15			
3	1.2DL + 1WL AZI 30	Yes	Y	1	1.2	3	1	14	0.866	15	0.5		
4	1.2DL + 1WL AZI 60	Yes	Y	1	1.2	4	1	14	0.5	15	0.866		
5	1.2DL + 1WL AZI 90	Yes	Y	1	1.2	5	1	14		15	1		
6	1.2DL + 1WL AZI 120	Yes	Y	1	1.2	6	1	14	-0.5	15	0.866		
7	1.2DL + 1WL AZI 150	Yes	Y	1	1.2	7	1	14	-0.866	15	0.5		
8	1.2DL + 1WL AZI 180	Yes	Y	1	1.2	8	1	14	-1	15			
9	1.2DL + 1WL AZI 210	Yes	Y	1	1.2	9	1	14	-0.866	15	-0.5		
10	1.2DL + 1WL AZI 240	Yes	Y	1	1.2	10	1	14	-0.5	15	-0.866		
11	1.2DL + 1WL AZI 270	Yes	Y	1	1.2	11	1	14		15	-1		
12	1.2DL + 1WL AZI 300	Yes	Y	1	1.2	12	1	14	0.5	15	-0.866		
13	1.2DL + 1WL AZI 330	Yes	Y	1	1.2	13	1	14	0.866	15	-0.5		
14	0.9DL + 1WL AZI 0	Yes	Y	1	0.9	2	1	14	1	15			
15	0.9DL + 1WL AZI 30	Yes	Y	1	0.9	3	1	14	0.866	15	0.5		
16	0.9DL + 1WL AZI 60	Yes	Y	1	0.9	4	1	14	0.5	15	0.866		
17	0.9DL + 1WL AZI 90	Yes	Y	1	0.9	5	1	14		15	1		
18	0.9DL + 1WL AZI 120	Yes	Y	1	0.9	6	1	14	-0.5	15	0.866		
19	0.9DL + 1WL AZI 150	Yes	Y	1	0.9	7	1	14	-0.866	15	0.5		
20	0.9DL + 1WL AZI 180	Yes	Y	1	0.9	8	1	14	-1	15			
21	0.9DL + 1WL AZI 210	Yes	Y	1	0.9	9	1	14	-0.866	15	-0.5		
22	0.9DL + 1WL AZI 240	Yes	Y	1	0.9	10	1	14	-0.5	15	-0.866		
23	0.9DL + 1WL AZI 270	Yes	Y	1	0.9	11	1	14		15	-1		
24	0.9DL + 1WL AZI 300	Yes	Y	1	0.9	12	1	14	0.5	15	-0.866		
25	0.9DL + 1WL AZI 330	Yes	Y	1	0.9	13	1	14	0.866	15	-0.5		
26	1.2D + 1.0Di	Yes	Y	1	1.2	16	1						
27	1.2D + 1.0Di + 1.0Wi AZI 0	Yes	Y	1	1.2	16	1	17	1	29	1	30	
28	1.2D + 1.0Di + 1.0Wi AZI 30	Yes	Y	1	1.2	16	1	18	1	29	0.866	30	0.5
29	1.2D + 1.0Di + 1.0Wi AZI 60	Yes	Y	1	1.2	16	1	19	1	29	0.5	30	0.866
30	1.2D + 1.0Di + 1.0Wi AZI 90	Yes	Y	1	1.2	16	1	20	1	29		30	1
31	1.2D + 1.0Di + 1.0Wi AZI 120	Yes	Y	1	1.2	16	1	21	1	29	-0.5	30	0.866
32	1.2D + 1.0Di + 1.0Wi AZI 150	Yes	Y	1	1.2	16	1	22	1	29	-0.866	30	0.5
33	1.2D + 1.0Di + 1.0Wi AZI 180	Yes	Y	1	1.2	16	1	23	1	29	-1	30	
34	1.2D + 1.0Di + 1.0Wi AZI 210	Yes	Y	1	1.2	16	1	24	1	29	-0.866	30	-0.5
35	1.2D + 1.0Di + 1.0Wi AZI 240	Yes	Y	1	1.2	16	1	25	1	29	-0.5	30	-0.866
36	1.2D + 1.0Di + 1.0Wi AZI 270	Yes	Y	1	1.2	16	1	26	1	29		30	-1
37	1.2D + 1.0Di + 1.0Wi AZI 300	Yes	Y	1	1.2	16	1	27	1	29	0.5	30	-0.866
38	1.2D + 1.0Di + 1.0Wi AZI 330	Yes	Y	1	1.2	16	1	28	1	29	0.866	30	-0.5
39	(1.2 + 0.2Sds)DL + 1.0E AZI 0	Yes	Y	1	1.238	31	1	32					
40	(1.2 + 0.2Sds)DL + 1.0E AZI 30	Yes	Y	1	1.238	31	0.866	32	0.5				
41	(1.2 + 0.2Sds)DL + 1.0E AZI 60	Yes	Y	1	1.238	31	0.5	32	0.866				
42	(1.2 + 0.2Sds)DL + 1.0E AZI 90	Yes	Y	1	1.238	31		32	1				
43	(1.2 + 0.2Sds)DL + 1.0E AZI 120	Yes	Y	1	1.238	31	-0.5	32	0.866				
44	(1.2 + 0.2Sds)DL + 1.0E AZI 150	Yes	Y	1	1.238	31	-0.866	32	0.5				
45	(1.2 + 0.2Sds)DL + 1.0E AZI 180	Yes	Y	1	1.238	31	-1	32					
46	(1.2 + 0.2Sds)DL + 1.0E AZI 210	Yes	Y	1	1.238	31	-0.866	32	-0.5				
47	(1.2 + 0.2Sds)DL + 1.0E AZI 240	Yes	Y	1	1.238	31	-0.5	32	-0.866				
48	(1.2 + 0.2Sds)DL + 1.0E AZI 270	Yes	Y	1	1.238	31		32	-1				
49	(1.2 + 0.2Sds)DL + 1.0E AZI 300	Yes	Y	1	1.238	31	0.5	32	-0.866				
50	(1.2 + 0.2Sds)DL + 1.0E AZI 330	Yes	Y	1	1.238	31	0.866	32	-0.5				
51	(0.9 - 0.2Sds)DL + 1.0E AZI 0	Yes	Y	1	0.862	31	1	32					
52	(0.9 - 0.2Sds)DL + 1.0E AZI 30	Yes	Y	1	0.862	31	0.866	32	0.5				
53	(0.9 - 0.2Sds)DL + 1.0E AZI 60	Yes	Y	1	0.862	31	0.5	32	0.866				
54	(0.9 - 0.2Sds)DL + 1.0E AZI 90	Yes	Y	1	0.862	31		32	1				
55	(0.9 - 0.2Sds)DL + 1.0E AZI 120	Yes	Y	1	0.862	31	-0.5	32	0.866				
56	(0.9 - 0.2Sds)DL + 1.0E AZI 150	Yes	Y	1	0.862	31	-0.866	32	0.5				
57	(0.9 - 0.2Sds)DL + 1.0E AZI 180	Yes	Y	1	0.862	31	-1	32					
58	(0.9 - 0.2Sds)DL + 1.0E AZI 210	Yes	Y	1	0.862	31	-0.866	32	-0.5				
59	(0.9 - 0.2Sds)DL + 1.0E AZI 240	Yes	Y	1	0.862	31	-0.5	32	-0.866				
60	(0.9 - 0.2Sds)DL + 1.0E AZI 270	Yes	Y	1	0.862	31		32	-1				
61	(0.9 - 0.2Sds)DL + 1.0E AZI 300	Yes	Y	1	0.862	31	0.5	32	-0.866				
62	(0.9 - 0.2Sds)DL + 1.0E AZI 330	Yes	Y	1	0.862	31	0.866	32	-0.5				
63	1.0DL + 1.5LL + 1.0SWL (60 mph) AZI 0	Yes	Y	1	1	2	0.23	14	0.23	15		33	1.5

**Load Combinations (Continued)**

	Description	Solve	P	Delta	BLC	Factor	BLC	Factor	BLC	Factor	BLC	Factor	BLC	Factor
64	1.0DL + 1.5LL + 1.0SWL (60 mph) AZI 30	Yes	Y	1	1	3	0.23	14	0.2	15	0.115	33	1.5	
65	1.0DL + 1.5LL + 1.0SWL (60 mph) AZI 60	Yes	Y	1	1	4	0.23	14	0.115	15	0.2	33	1.5	
66	1.0DL + 1.5LL + 1.0SWL (60 mph) AZI 90	Yes	Y	1	1	5	0.23	14		15	0.23	33	1.5	
67	1.0DL + 1.5LL + 1.0SWL (60 mph) AZI 120	Yes	Y	1	1	6	0.23	14	-0.115	15	0.2	33	1.5	
68	1.0DL + 1.5LL + 1.0SWL (60 mph) AZI 150	Yes	Y	1	1	7	0.23	14	-0.2	15	0.115	33	1.5	
69	1.0DL + 1.5LL + 1.0SWL (60 mph) AZI 180	Yes	Y	1	1	8	0.23	14	-0.23	15		33	1.5	
70	1.0DL + 1.5LL + 1.0SWL (60 mph) AZI 210	Yes	Y	1	1	9	0.23	14	-0.2	15	-0.115	33	1.5	
71	1.0DL + 1.5LL + 1.0SWL (60 mph) AZI 240	Yes	Y	1	1	10	0.23	14	-0.115	15	-0.2	33	1.5	
72	1.0DL + 1.5LL + 1.0SWL (60 mph) AZI 270	Yes	Y	1	1	11	0.23	14		15	-0.23	33	1.5	
73	1.0DL + 1.5LL + 1.0SWL (60 mph) AZI 300	Yes	Y	1	1	12	0.23	14	0.115	15	-0.2	33	1.5	
74	1.0DL + 1.5LL + 1.0SWL (60 mph) AZI 330	Yes	Y	1	1	13	0.23	14	0.2	15	-0.115	33	1.5	
75	1.2DL + 1.5LL	Yes	Y	1	1.2	33	1.5							
76	1.2DL + 1.5LM-MP1 + 1SWL (30 mph) AZI 0	Yes	Y	1	1.2	34	1.5	2	0.058	14	0.058	15		
77	1.2DL + 1.5LM-MP1 + 1SWL (30 mph) AZI 30	Yes	Y	1	1.2	34	1.5	3	0.058	14	0.05	15	0.029	
78	1.2DL + 1.5LM-MP1 + 1SWL (30 mph) AZI 60	Yes	Y	1	1.2	34	1.5	4	0.058	14	0.029	15	0.05	
79	1.2DL + 1.5LM-MP1 + 1SWL (30 mph) AZI 90	Yes	Y	1	1.2	34	1.5	5	0.058	14		15	0.058	
80	1.2DL + 1.5LM-MP1 + 1SWL (30 mph) AZI 120	Yes	Y	1	1.2	34	1.5	6	0.058	14	-0.029	15	0.05	
81	1.2DL + 1.5LM-MP1 + 1SWL (30 mph) AZI 150	Yes	Y	1	1.2	34	1.5	7	0.058	14	-0.05	15	0.029	
82	1.2DL + 1.5LM-MP1 + 1SWL (30 mph) AZI 180	Yes	Y	1	1.2	34	1.5	8	0.058	14	-0.058	15		
83	1.2DL + 1.5LM-MP1 + 1SWL (30 mph) AZI 210	Yes	Y	1	1.2	34	1.5	9	0.058	14	-0.05	15	-0.029	
84	1.2DL + 1.5LM-MP1 + 1SWL (30 mph) AZI 240	Yes	Y	1	1.2	34	1.5	10	0.058	14	-0.029	15	-0.05	
85	1.2DL + 1.5LM-MP1 + 1SWL (30 mph) AZI 270	Yes	Y	1	1.2	34	1.5	11	0.058	14		15	-0.058	
86	1.2DL + 1.5LM-MP1 + 1SWL (30 mph) AZI 300	Yes	Y	1	1.2	34	1.5	12	0.058	14	0.029	15	-0.05	
87	1.2DL + 1.5LM-MP1 + 1SWL (30 mph) AZI 330	Yes	Y	1	1.2	34	1.5	13	0.058	14	0.05	15	-0.029	
88	1.2DL + 1.5LM-MP2 + 1SWL (30 mph) AZI 0	Yes	Y	1	1.2	35	1.5	2	0.058	14	0.058	15		
89	1.2DL + 1.5LM-MP2 + 1SWL (30 mph) AZI 30	Yes	Y	1	1.2	35	1.5	3	0.058	14	0.05	15	0.029	
90	1.2DL + 1.5LM-MP2 + 1SWL (30 mph) AZI 60	Yes	Y	1	1.2	35	1.5	4	0.058	14	0.029	15	0.05	
91	1.2DL + 1.5LM-MP2 + 1SWL (30 mph) AZI 90	Yes	Y	1	1.2	35	1.5	5	0.058	14		15	0.058	
92	1.2DL + 1.5LM-MP2 + 1SWL (30 mph) AZI 120	Yes	Y	1	1.2	35	1.5	6	0.058	14	-0.029	15	0.05	
93	1.2DL + 1.5LM-MP2 + 1SWL (30 mph) AZI 150	Yes	Y	1	1.2	35	1.5	7	0.058	14	-0.05	15	0.029	
94	1.2DL + 1.5LM-MP2 + 1SWL (30 mph) AZI 180	Yes	Y	1	1.2	35	1.5	8	0.058	14	-0.058	15		
95	1.2DL + 1.5LM-MP2 + 1SWL (30 mph) AZI 210	Yes	Y	1	1.2	35	1.5	9	0.058	14	-0.05	15	-0.029	
96	1.2DL + 1.5LM-MP2 + 1SWL (30 mph) AZI 240	Yes	Y	1	1.2	35	1.5	10	0.058	14	-0.029	15	-0.05	
97	1.2DL + 1.5LM-MP2 + 1SWL (30 mph) AZI 270	Yes	Y	1	1.2	35	1.5	11	0.058	14		15	-0.058	
98	1.2DL + 1.5LM-MP2 + 1SWL (30 mph) AZI 300	Yes	Y	1	1.2	35	1.5	12	0.058	14	0.029	15	-0.05	
99	1.2DL + 1.5LM-MP2 + 1SWL (30 mph) AZI 330	Yes	Y	1	1.2	35	1.5	13	0.058	14	0.05	15	-0.029	
100	1.2DL + 1.5LM-MP3 + 1SWL (30 mph) AZI 0	Yes	Y	1	1.2	36	1.5	2	0.058	14	0.058	15		
101	1.2DL + 1.5LM-MP3 + 1SWL (30 mph) AZI 30	Yes	Y	1	1.2	36	1.5	3	0.058	14	0.05	15	0.029	
102	1.2DL + 1.5LM-MP3 + 1SWL (30 mph) AZI 60	Yes	Y	1	1.2	36	1.5	4	0.058	14	0.029	15	0.05	
103	1.2DL + 1.5LM-MP3 + 1SWL (30 mph) AZI 90	Yes	Y	1	1.2	36	1.5	5	0.058	14		15	0.058	
104	1.2DL + 1.5LM-MP3 + 1SWL (30 mph) AZI 120	Yes	Y	1	1.2	36	1.5	6	0.058	14	-0.029	15	0.05	
105	1.2DL + 1.5LM-MP3 + 1SWL (30 mph) AZI 150	Yes	Y	1	1.2	36	1.5	7	0.058	14	-0.05	15	0.029	
106	1.2DL + 1.5LM-MP3 + 1SWL (30 mph) AZI 180	Yes	Y	1	1.2	36	1.5	8	0.058	14	-0.058	15		
107	1.2DL + 1.5LM-MP3 + 1SWL (30 mph) AZI 210	Yes	Y	1	1.2	36	1.5	9	0.058	14	-0.05	15	-0.029	
108	1.2DL + 1.5LM-MP3 + 1SWL (30 mph) AZI 240	Yes	Y	1	1.2	36	1.5	10	0.058	14	-0.029	15	-0.05	
109	1.2DL + 1.5LM-MP3 + 1SWL (30 mph) AZI 270	Yes	Y	1	1.2	36	1.5	11	0.058	14		15	-0.058	
110	1.2DL + 1.5LM-MP3 + 1SWL (30 mph) AZI 300	Yes	Y	1	1.2	36	1.5	12	0.058	14	0.029	15	-0.05	
111	1.2DL + 1.5LM-MP3 + 1SWL (30 mph) AZI 330	Yes	Y	1	1.2	36	1.5	13	0.058	14	0.05	15	-0.029	
112	1.2DL + 1.5LM-MP4 + 1SWL (30 mph) AZI 0	Yes	Y	1	1.2	37	1.5	2	0.058	14	0.058	15		
113	1.2DL + 1.5LM-MP4 + 1SWL (30 mph) AZI 30	Yes	Y	1	1.2	37	1.5	3	0.058	14	0.05	15	0.029	
114	1.2DL + 1.5LM-MP4 + 1SWL (30 mph) AZI 60	Yes	Y	1	1.2	37	1.5	4	0.058	14	0.029	15	0.05	
115	1.2DL + 1.5LM-MP4 + 1SWL (30 mph) AZI 90	Yes	Y	1	1.2	37	1.5	5	0.058	14		15	0.058	
116	1.2DL + 1.5LM-MP4 + 1SWL (30 mph) AZI 120	Yes	Y	1	1.2	37	1.5	6	0.058	14	-0.029	15	0.05	
117	1.2DL + 1.5LM-MP4 + 1SWL (30 mph) AZI 150	Yes	Y	1	1.2	37	1.5	7	0.058	14	-0.05	15	0.029	
118	1.2DL + 1.5LM-MP4 + 1SWL (30 mph) AZI 180	Yes	Y	1	1.2	37	1.5	8	0.058	14	-0.058	15		
119	1.2DL + 1.5LM-MP4 + 1SWL (30 mph) AZI 210	Yes	Y	1	1.2	37	1.5	9	0.058	14	-0.05	15	-0.029	
120	1.2DL + 1.5LM-MP4 + 1SWL (30 mph) AZI 240	Yes	Y	1	1.2	37	1.5	10	0.058	14	-0.029	15	-0.05	
121	1.2DL + 1.5LM-MP4 + 1SWL (30 mph) AZI 270	Yes	Y	1	1.2	37	1.5	11	0.058	14		15	-0.058	
122	1.2DL + 1.5LM-MP4 + 1SWL (30 mph) AZI 300	Yes	Y	1	1.2	37	1.5	12	0.058	14	0.029	15	-0.05	
123	1.2DL + 1.5LM-MP4 + 1SWL (30 mph) AZI 330	Yes	Y	1	1.2	37	1.5	13	0.058	14	0.05	15	-0.029	
124	1.2DL + 1.5LM-MP5 + 1SWL (30 mph) AZI 0	Yes	Y	1	1.2	38	1.5	2	0.058	14	0.058	15		
125	1.2DL + 1.5LM-MP5 + 1SWL (30 mph) AZI 30	Yes	Y	1	1.2	38	1.5	3	0.058	14	0.05	15	0.029	
126	1.2DL + 1.5LM-MP5 + 1SWL (30 mph) AZI 60	Yes	Y	1	1.2	38	1.5	4	0.058	14	0.029	15	0.05	

**Load Combinations (Continued)**

Description		Solve	P	Delta	BLC	Factor	BLC	Factor	BLC	Factor	BLC	Factor	BLC	Factor
127	1.2DL + 1.5LM-MP5 + 1SWL (30 mph) AZI 90	Yes	Y	1	1.2	38	1.5	5	0.058	14		15	0.058	
128	1.2DL + 1.5LM-MP5 + 1SWL (30 mph) AZI 120	Yes	Y	1	1.2	38	1.5	6	0.058	14	-0.029	15	0.05	
129	1.2DL + 1.5LM-MP5 + 1SWL (30 mph) AZI 150	Yes	Y	1	1.2	38	1.5	7	0.058	14	-0.05	15	0.029	
130	1.2DL + 1.5LM-MP5 + 1SWL (30 mph) AZI 180	Yes	Y	1	1.2	38	1.5	8	0.058	14	-0.058	15		
131	1.2DL + 1.5LM-MP5 + 1SWL (30 mph) AZI 210	Yes	Y	1	1.2	38	1.5	9	0.058	14	-0.05	15	-0.029	
132	1.2DL + 1.5LM-MP5 + 1SWL (30 mph) AZI 240	Yes	Y	1	1.2	38	1.5	10	0.058	14	-0.029	15	-0.05	
133	1.2DL + 1.5LM-MP5 + 1SWL (30 mph) AZI 270	Yes	Y	1	1.2	38	1.5	11	0.058	14		15	-0.058	
134	1.2DL + 1.5LM-MP5 + 1SWL (30 mph) AZI 300	Yes	Y	1	1.2	38	1.5	12	0.058	14	0.029	15	-0.05	
135	1.2DL + 1.5LM-MP5 + 1SWL (30 mph) AZI 330	Yes	Y	1	1.2	38	1.5	13	0.058	14	0.05	15	-0.029	
136	1.2DL + 1.5LM-MP6 + 1SWL (30 mph) AZI 0	Yes	Y	1	1.2	39	1.5	2	0.058	14	0.058	15		
137	1.2DL + 1.5LM-MP6 + 1SWL (30 mph) AZI 30	Yes	Y	1	1.2	39	1.5	3	0.058	14	0.05	15	0.029	
138	1.2DL + 1.5LM-MP6 + 1SWL (30 mph) AZI 60	Yes	Y	1	1.2	39	1.5	4	0.058	14	0.029	15	0.05	
139	1.2DL + 1.5LM-MP6 + 1SWL (30 mph) AZI 90	Yes	Y	1	1.2	39	1.5	5	0.058	14		15	0.058	
140	1.2DL + 1.5LM-MP6 + 1SWL (30 mph) AZI 120	Yes	Y	1	1.2	39	1.5	6	0.058	14	-0.029	15	0.05	
141	1.2DL + 1.5LM-MP6 + 1SWL (30 mph) AZI 150	Yes	Y	1	1.2	39	1.5	7	0.058	14	-0.05	15	0.029	
142	1.2DL + 1.5LM-MP6 + 1SWL (30 mph) AZI 180	Yes	Y	1	1.2	39	1.5	8	0.058	14	-0.058	15		
143	1.2DL + 1.5LM-MP6 + 1SWL (30 mph) AZI 210	Yes	Y	1	1.2	39	1.5	9	0.058	14	-0.05	15	-0.029	
144	1.2DL + 1.5LM-MP6 + 1SWL (30 mph) AZI 240	Yes	Y	1	1.2	39	1.5	10	0.058	14	-0.029	15	-0.05	
145	1.2DL + 1.5LM-MP6 + 1SWL (30 mph) AZI 270	Yes	Y	1	1.2	39	1.5	11	0.058	14		15	-0.058	
146	1.2DL + 1.5LM-MP6 + 1SWL (30 mph) AZI 300	Yes	Y	1	1.2	39	1.5	12	0.058	14	0.029	15	-0.05	
147	1.2DL + 1.5LM-MP6 + 1SWL (30 mph) AZI 330	Yes	Y	1	1.2	39	1.5	13	0.058	14	0.05	15	-0.029	
148	1.2DL + 1.5LM-MP7 + 1SWL (30 mph) AZI 0	Yes	Y	1	1.2	40	1.5	2	0.058	14	0.058	15		
149	1.2DL + 1.5LM-MP7 + 1SWL (30 mph) AZI 30	Yes	Y	1	1.2	40	1.5	3	0.058	14	0.05	15	0.029	
150	1.2DL + 1.5LM-MP7 + 1SWL (30 mph) AZI 60	Yes	Y	1	1.2	40	1.5	4	0.058	14	0.029	15	0.05	
151	1.2DL + 1.5LM-MP7 + 1SWL (30 mph) AZI 90	Yes	Y	1	1.2	40	1.5	5	0.058	14		15	0.058	
152	1.2DL + 1.5LM-MP7 + 1SWL (30 mph) AZI 120	Yes	Y	1	1.2	40	1.5	6	0.058	14	-0.029	15	0.05	
153	1.2DL + 1.5LM-MP7 + 1SWL (30 mph) AZI 150	Yes	Y	1	1.2	40	1.5	7	0.058	14	-0.05	15	0.029	
154	1.2DL + 1.5LM-MP7 + 1SWL (30 mph) AZI 180	Yes	Y	1	1.2	40	1.5	8	0.058	14	-0.058	15		
155	1.2DL + 1.5LM-MP7 + 1SWL (30 mph) AZI 210	Yes	Y	1	1.2	40	1.5	9	0.058	14	-0.05	15	-0.029	
156	1.2DL + 1.5LM-MP7 + 1SWL (30 mph) AZI 240	Yes	Y	1	1.2	40	1.5	10	0.058	14	-0.029	15	-0.05	
157	1.2DL + 1.5LM-MP7 + 1SWL (30 mph) AZI 270	Yes	Y	1	1.2	40	1.5	11	0.058	14		15	-0.058	
158	1.2DL + 1.5LM-MP7 + 1SWL (30 mph) AZI 300	Yes	Y	1	1.2	40	1.5	12	0.058	14	0.029	15	-0.05	
159	1.2DL + 1.5LM-MP7 + 1SWL (30 mph) AZI 330	Yes	Y	1	1.2	40	1.5	13	0.058	14	0.05	15	-0.029	
160	1.2DL + 1.5LM-MP8 + 1SWL (30 mph) AZI 0	Yes	Y	1	1.2	41	1.5	2	0.058	14	0.058	15		
161	1.2DL + 1.5LM-MP8 + 1SWL (30 mph) AZI 30	Yes	Y	1	1.2	41	1.5	3	0.058	14	0.05	15	0.029	
162	1.2DL + 1.5LM-MP8 + 1SWL (30 mph) AZI 60	Yes	Y	1	1.2	41	1.5	4	0.058	14	0.029	15	0.05	
163	1.2DL + 1.5LM-MP8 + 1SWL (30 mph) AZI 90	Yes	Y	1	1.2	41	1.5	5	0.058	14		15	0.058	
164	1.2DL + 1.5LM-MP8 + 1SWL (30 mph) AZI 120	Yes	Y	1	1.2	41	1.5	6	0.058	14	-0.029	15	0.05	
165	1.2DL + 1.5LM-MP8 + 1SWL (30 mph) AZI 150	Yes	Y	1	1.2	41	1.5	7	0.058	14	-0.05	15	0.029	
166	1.2DL + 1.5LM-MP8 + 1SWL (30 mph) AZI 180	Yes	Y	1	1.2	41	1.5	8	0.058	14	-0.058	15		
167	1.2DL + 1.5LM-MP8 + 1SWL (30 mph) AZI 210	Yes	Y	1	1.2	41	1.5	9	0.058	14	-0.05	15	-0.029	
168	1.2DL + 1.5LM-MP8 + 1SWL (30 mph) AZI 240	Yes	Y	1	1.2	41	1.5	10	0.058	14	-0.029	15	-0.05	
169	1.2DL + 1.5LM-MP8 + 1SWL (30 mph) AZI 270	Yes	Y	1	1.2	41	1.5	11	0.058	14		15	-0.058	
170	1.2DL + 1.5LM-MP8 + 1SWL (30 mph) AZI 300	Yes	Y	1	1.2	41	1.5	12	0.058	14	0.029	15	-0.05	
171	1.2DL + 1.5LM-MP8 + 1SWL (30 mph) AZI 330	Yes	Y	1	1.2	41	1.5	13	0.058	14	0.05	15	-0.029	
172	1.2DL + 1.5LM-MP9 + 1SWL (30 mph) AZI 0	Yes	Y	1	1.2	42	1.5	2	0.058	14	0.058	15		
173	1.2DL + 1.5LM-MP9 + 1SWL (30 mph) AZI 30	Yes	Y	1	1.2	42	1.5	3	0.058	14	0.05	15	0.029	
174	1.2DL + 1.5LM-MP9 + 1SWL (30 mph) AZI 60	Yes	Y	1	1.2	42	1.5	4	0.058	14	0.029	15	0.05	
175	1.2DL + 1.5LM-MP9 + 1SWL (30 mph) AZI 90	Yes	Y	1	1.2	42	1.5	5	0.058	14		15	0.058	
176	1.2DL + 1.5LM-MP9 + 1SWL (30 mph) AZI 120	Yes	Y	1	1.2	42	1.5	6	0.058	14	-0.029	15	0.05	
177	1.2DL + 1.5LM-MP9 + 1SWL (30 mph) AZI 150	Yes	Y	1	1.2	42	1.5	7	0.058	14	-0.05	15	0.029	
178	1.2DL + 1.5LM-MP9 + 1SWL (30 mph) AZI 180	Yes	Y	1	1.2	42	1.5	8	0.058	14	-0.058	15		
179	1.2DL + 1.5LM-MP9 + 1SWL (30 mph) AZI 210	Yes	Y	1	1.2	42	1.5	9	0.058	14	-0.05	15	-0.029	
180	1.2DL + 1.5LM-MP9 + 1SWL (30 mph) AZI 240	Yes	Y	1	1.2	42	1.5	10	0.058	14	-0.029	15	-0.05	
181	1.2DL + 1.5LM-MP9 + 1SWL (30 mph) AZI 270	Yes	Y	1	1.2	42	1.5	11	0.058	14		15	-0.058	
182	1.2DL + 1.5LM-MP9 + 1SWL (30 mph) AZI 300	Yes	Y	1	1.2	42	1.5	12	0.058	14	0.029	15	-0.05	

**Envelope Node Reactions**

Node Label	X [lb]	LC	Y [lb]	LC	Z [lb]	LC	MX [lb-ft]	LC	MY [lb-ft]	LC	MZ [lb-ft]	LC
1 N208 max	1341.272	4	1576.585	145	401.794	25	0	182	0	182	0	182
2 min	-1391.695	10	-772.156	17	-396.709	7	0	1	0	1	0	1
3 N209 max	1810.99	4	6390.864	35	1480.665	4	0	182	0	182	0	182
4 min	-1760.275	22	-9.582	16	-1522.324	22	0	1	0	1	0	1

**Envelope Node Reactions (Continued)**

Node Label	X [lb]	LC	Y [lb]	LC	Z [lb]	LC	MX [lb-ft]	LC	MY [lb-ft]	LC	MZ [lb-ft]	LC	
5 N210	max	774.538	8	1766.313	159	1742.756	14	0	182	0	182	0	182
6	min	-730.567	14	-880.054	19	-1661.182	8	0	1	0	1	0	1
7 N213	max	361.353	7	822.06	20	990.025	15	0	182	0	182	0	182
8	min	-357.704	25	-1132.559	160	-973.031	21	0	1	0	1	0	1
9 N211	max	694.675	16	373.122	15	291.042	15	0	182	0	182	0	182
10	min	-683.745	10	-2450.457	35	-318.232	9	0	1	0	1	0	1
11 N212	max	1351.572	7	1992.293	93	1412.203	24	0	182	0	182	0	182
12	min	-1262.17	25	-1153.074	25	-1422.505	6	0	1	0	1	0	1
13 N215	max	881.101	13	3980.394	27	2383.349	2	0	182	0	182	0	182
14	min	-789.018	19	-922.588	20	-2413.787	20	0	1	0	1	0	1
15 N214	max	2048.894	18	2423.656	31	702.259	11	0	182	0	182	0	182
16	min	-2088.84	12	-915.815	24	-770.086	17	0	1	0	1	0	1
17 Totals:	max	5720.584	17	12283.577	32	6693.199	2						
18	min	-5721.056	11	2834.374	62	-6692.961	20						

**Envelope AISC 15th (360-16): LRFD Steel Code Checks**

Member	Shape	Code Check	Loc[in]	LC	Shear Check	Loc[in]	Dir	LC	phi*Pnc [lb]	phi*Pnt [lb]	phi*Mn y-y [lb-ft]	phi*Mn z-z [lb-ft]	Cb	Eqn
1 M10	C5X9	0.988	16.406	2	0.228	16.406	y	38	73009.818	85536	1909.122	11853	1.886	H1-1b
2 MP9	PIPE 2.0	0.96	54	13	0.384	54		13	14916.096	32130	1871.625	1871.625	1.69	H3-6
3 M1	C5X9	0.922	21.389	6	0.483	20.778	y	31	74734.543	85536	1909.122	11853	1.242	H1-1b
4 M6	C5X9	0.904	16.406	8	0.177	16.406	y	33	59180.807	85536	1909.122	11853	1.757	H1-1b
5 M2	C5X9	0.829	21.389	8	0.561	37.889	y	36	74734.543	85536	1909.122	11853	1.004	H1-1b
6 MP3	PIPE 2.0	0.779	54	9	0.43	54		8	14916.096	32130	1871.625	1871.625	1.892	H3-6
7 M3	C5X9	0.736	36.056	12	0.528	22	y	27	74734.543	85536	1909.122	11853	1.486	H1-1b
8 M5	C5X9	0.661	75	8	0.394	58.594	y	38	73009.818	85536	1909.122	11853	1.867	H1-1b
9 M9	C5X9	0.607	58.594	2	0.36	58.594	y	31	73009.818	85536	1909.122	11853	1.84	H1-1b
10 MP6	PIPE 2.0	0.537	54	4	0.11	54		4	14916.096	32130	1871.625	1871.625	1.94	H1-1b
11 M7	C5X9	0.525	58.594	9	0.343	58.594	y	32	73009.818	85536	1909.122	11853	1.484	H1-1b
12 M52	L2.5x2.5x3	0.518	10.831	8	0.114	0	y	10	27800.245	29192.4	872.574	1971.83	1.5	H2-1
13 M8	C5X9	0.515	16.406	6	0.162	16.406	y	28	59180.807	85536	1909.122	11853	1.942	H1-1b
14 MP8	PIPE 2.0	0.476	54	8	0.119	54		12	14916.096	32130	1871.625	1871.625	2.26	H1-1b
15 MP5	PIPE 2.0	0.448	54	2	0.248	54		10	14916.096	32130	1871.625	1871.625	2.188	H1-1b
16 MP4	PIPE 2.0	0.431	54	3	0.299	12		4	14916.096	32130	1871.625	1871.625	2.263	H3-6
17 MP2	PIPE 2.0	0.409	54	5	0.178	54		8	14916.096	32130	1871.625	1871.625	1.945	H1-1b
18 MP1	PIPE 2.0	0.403	54	6	0.242	54		7	14916.096	32130	1871.625	1871.625	1.917	H1-1b
19 MP7	PIPE 2.0	0.402	54	9	0.126	54		10	14916.096	32130	1871.625	1871.625	1.943	H1-1b
20 M53	L2.5x2.5x3	0.402	0	4	0.144	10.831	y	10	27800.245	29192.4	872.574	1971.83	1.5	H2-1
21 M47	PIPE 2.0	0.352	130.792	8	0.303	135.354		8	6645.102	32130	1871.625	1871.625	2.255	H3-6
22 M48	PIPE 2.0	0.341	16.729	2	0.224	10.646		7	6645.102	32130	1871.625	1871.625	2.241	H1-1b
23 M42	PIPE 2.0	0.301	97.333	31	0.236	15.208		10	6645.102	32130	1871.625	1871.625	2.413	H1-1b
24 M54	L2.5x2.5x3	0.283	10.831	7	0.094	10.831	y	3	27800.245	29192.4	872.574	1971.83	1.5	H2-1
25 M14	L2.5x2.5x4	0.073	74.375	33	0.026	79.688	y	7	6003.169	38556	1113.554	2114.646	1.5	H2-1
26 M13	L2.5x2.5x4	0.061	74.375	27	0.026	79.688	z	7	6003.169	38556	1113.554	2114.646	1.5	H2-1
27 M15	0.75" SR	0.03	15	33	0.041	15		33	10219.671	14313.866	178.929	178.929	2.439	H1-1b
28 M19	0.75" SR	0.029	15	29	0.022	15		33	10219.671	14313.866	178.929	178.929	2.385	H1-1b
29 M20	0.75" SR	0.028	15	29	0.018	15		33	10219.671	14313.866	178.929	178.929	2.391	H1-1b
30 M18	0.75" SR	0.027	15	29	0.028	0		33	10219.671	14313.866	178.929	178.929	2.393	H1-1b
31 M21	0.75" SR	0.027	15	29	0.016	15		33	10219.671	14313.866	178.929	178.929	2.386	H1-1b
32 M11	C5X9	0.023	17.333	4	0.031	34.667	y	35	65448.897	85536	1909.122	11853	1.146	H1-1b
33 M17	0.75" SR	0.02	15	29	0.038	0		33	10219.671	14313.866	178.929	178.929	2.457	H1-1b
34 M12	C5X9	0.02	21.105	18	0.246	21.105	y	33	77457.39	85536	1909.122	11853	1.947	H1-1b*
35 M16	0.75" SR	0.014	15	33	0.045	15		33	10219.671	14313.866	178.929	178.929	2.571	H1-1b

**APPENDIX D**  
**ADDITIONAL CALCUATIONS**


**Bolt Calculation Tool, V1.4**

PROJECT DATA	
Site Name:	South Windsor/Rt 5
Site Number:	828054
Job Code:	1039-Z0001-B
Connection Description:	Standoff to Collar Mount

APPLIED LOADS		
Bolt Tension:		lbs
Bolt Shear:	2531.47	lbs

BOLT PROPERTIES		
Bolt Type:	Bolt	-
Bolt Diameter:	0.625	in
Bolt Grade:	A325	-
# of Bolts:	1	-
Threads Excluded?	No	-

BOLT CHECK		
Tensile Strength	20340.15	
Shear Strength	13805.83	
Tensile Usage	0.0%	
Shear Usage	18.3%	
Interaction Check	0.03	<b>≤1.05</b>
Result	Pass	

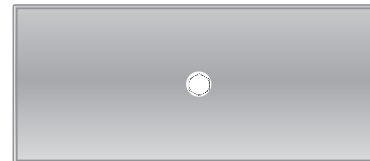

# Exhibit F

## **Power Density/RF Emissions Report**

RADIO FREQUENCY EMISSIONS ANALYSIS REPORT  
EVALUATION OF HUMAN EXPOSURE POTENTIAL  
TO NON-IONIZING EMISSIONS

T-Mobile Existing Facility

Site ID: CT11279D

South Windsor/Rt 5  
300 Governors Highway  
South Windsor, Connecticut 06074

**November 11, 2020**

**EBI Project Number: 6220005797**

Site Compliance Summary	
Compliance Status:	<b>COMPLIANT</b>
Site total MPE% of FCC general population allowable limit:	<b>23.24%</b>



November 11, 2020

T-Mobile  
Attn: Jason Overbey, RF Manager  
35 Griffin Road South  
Bloomfield, Connecticut 06002

Emissions Analysis for Site: CT11279D - South Windsor/Rt 5

EBI Consulting was directed to analyze the proposed T-Mobile facility located at **300 Governors Highway in South Windsor, Connecticut** for the purpose of determining whether the emissions from the Proposed T-Mobile Antenna Installation located on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01 and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter ( $\mu\text{W}/\text{cm}^2$ ). The number of  $\mu\text{W}/\text{cm}^2$  calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits; therefore, it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) – (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

General population/uncontrolled exposure limits apply to situations in which the general population may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general population would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Public exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter ( $\mu\text{W}/\text{cm}^2$ ). The general population exposure limits for the 600 MHz and 700 MHz frequency bands are approximately  $400 \mu\text{W}/\text{cm}^2$  and  $467 \mu\text{W}/\text{cm}^2$ , respectively. The general population exposure limit for the 1900 MHz (PCS), 2100 MHz (AWS) and 11 GHz frequency bands is  $1000 \mu\text{W}/\text{cm}^2$ . Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.

Occupational/controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

## **CALCULATIONS**

Calculations were done for the proposed T-Mobile Wireless antenna facility located at 300 Governors Highway in South Windsor, Connecticut using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. Since T-Mobile is proposing highly focused directional panel antennas, which project most of the emitted energy out toward the horizon, all calculations were performed assuming a lobe representing the maximum gain of the antenna per the antenna manufacturer's supplied specifications, minus 10 dB for directional panel antennas and 20 dB for highly focused parabolic microwave dishes, was focused at the base of the tower. For this report, the sample point is the top of a 6-foot person standing at the base of the tower.

For all calculations, all equipment was calculated using the following assumptions:

- 1) 2 LTE channels (600 MHz Band) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel.
- 2) 1 NR channel (600 MHz Band) was considered for each sector of the proposed installation. This Channel has a transmit power of 80 Watts.
- 3) 2 LTE channels (700 MHz Band) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel.
- 4) 4 GSM channels (PCS Band - 1900 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel.
- 5) 4 LTE channels (PCS Band - 1900 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 60 Watts per Channel.

- 6) 2 UMTS channels (AWS Band - 2100 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel.
- 7) 2 LTE channels (AWS Band – 2100 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 60 Watts per Channel.
- 8) 1 LTE channel (BRS Band - 2500 MHz) was considered for each sector of the proposed installation. This Channel has a transmit power of 120 Watts.
- 9) 1 NR channel (BRS Band - 2500 MHz) was considered for each sector of the proposed installation. This Channel has a transmit power of 120 Watts.
- 10) All radios at the proposed installation were considered to be running at full power and were uncombined in their RF transmissions paths per carrier prescribed configuration. Per FCC OET Bulletin No. 65 - Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. This is rarely the case, and if so, is never continuous.
- 11) For the following calculations, the sample point was the top of a 6-foot person standing at the base of the tower. The maximum gain of the antenna per the antenna manufacturer's supplied specifications, minus 10 dB for directional panel antennas and 20 dB for highly focused parabolic microwave dishes, was used in this direction. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 12) The antennas used in this modeling are the Ericsson AIR 32 for the 1900 MHz / 1900 MHz / 2100 MHz channel(s), the RFS APXVAARR24\_43-U-NA20 for the 600 MHz / 600 MHz / 700 MHz / 1900 MHz / 2100 MHz channel(s), the Ericsson AIR 6449 for the 2500 MHz / 2500 MHz channel(s) in Sector A, the Ericsson AIR 32 for the 1900 MHz / 1900 MHz / 2100 MHz channel(s), the RFS APXVAARR24\_43-U-NA20 for the 600 MHz / 600 MHz / 700 MHz / 1900 MHz / 2100 MHz channel(s), the Ericsson AIR 6449 for the 2500 MHz / 2500 MHz channel(s) in Sector B, the Ericsson AIR 32 for the 1900 MHz / 1900 MHz / 2100 MHz channel(s), the RFS APXVAARR24\_43-U-NA20 for the 600 MHz / 600 MHz / 700 MHz / 1900 MHz / 2100 MHz channel(s), the Ericsson AIR 6449 for the 2500 MHz / 2500 MHz channel(s) in Sector C. This is based on feedback from the carrier with regard to anticipated antenna selection. All Antenna gain values and associated transmit power levels are shown in the Site Inventory and Power Data table below. The maximum gain of the antenna per the antenna manufacturer's supplied specifications, minus 10 dB for directional panel antennas and 20 dB for highly focused parabolic microwave dishes, was used for all calculations. This value is a very conservative

estimate as gain reductions for these particular antennas are typically much higher in this direction.

- 13) The antenna mounting height centerline of the proposed antennas is 166 feet above ground level (AGL).
- 14) Emissions values for additional carriers were taken from the Connecticut Siting Council active database. Values in this database are provided by the individual carriers themselves.
- 15) All calculations were done with respect to uncontrolled / general population threshold limits.

## T-Mobile Site Inventory and Power Data

Sector:	A	Sector:	B	Sector:	C
Antenna #:	1	Antenna #:	1	Antenna #:	1
Make / Model:	Ericsson AIR 32	Make / Model:	Ericsson AIR 32	Make / Model:	Ericsson AIR 32
Frequency Bands:	1900 MHz / 1900 MHz / 2100 MHz	Frequency Bands:	1900 MHz / 1900 MHz / 2100 MHz	Frequency Bands:	1900 MHz / 1900 MHz / 2100 MHz
Gain:	15.35 dBd / 15.35 dBd / 15.85 dBd	Gain:	15.35 dBd / 15.35 dBd / 15.85 dBd	Gain:	15.35 dBd / 15.35 dBd / 15.85 dBd
Height (AGL):	166 feet	Height (AGL):	166 feet	Height (AGL):	166 feet
Channel Count:	8	Channel Count:	8	Channel Count:	8
Total TX Power (W):	360 Watts	Total TX Power (W):	360 Watts	Total TX Power (W):	360 Watts
ERP (W):	12,841.53	ERP (W):	12,841.53	ERP (W):	12,841.53
Antenna A1 MPE %:	<b>1.68%</b>	Antenna B1 MPE %:	<b>1.68%</b>	Antenna C1 MPE %:	<b>1.68%</b>
Antenna #:	2	Antenna #:	2	Antenna #:	2
Make / Model:	RFS APXVAARR24_43-U-NA20	Make / Model:	RFS APXVAARR24_43-U-NA20	Make / Model:	RFS APXVAARR24_43-U-NA20
Frequency Bands:	600 MHz / 600 MHz / 700 MHz / 1900 MHz / 2100 MHz	Frequency Bands:	600 MHz / 600 MHz / 700 MHz / 1900 MHz / 2100 MHz	Frequency Bands:	600 MHz / 600 MHz / 700 MHz / 1900 MHz / 2100 MHz
Gain:	12.95 dBd / 12.95 dBd / 13.35 dBd / 15.65 dBd / 16.35 dBd	Gain:	12.95 dBd / 12.95 dBd / 13.35 dBd / 15.65 dBd / 16.35 dBd	Gain:	12.95 dBd / 12.95 dBd / 13.35 dBd / 15.65 dBd / 16.35 dBd
Height (AGL):	166 feet	Height (AGL):	166 feet	Height (AGL):	166 feet
Channel Count:	9	Channel Count:	9	Channel Count:	9
Total TX Power (W):	380 Watts	Total TX Power (W):	380 Watts	Total TX Power (W):	380 Watts
ERP (W):	11,055.53	ERP (W):	11,055.53	ERP (W):	11,055.53
Antenna A2 MPE %:	<b>2.18%</b>	Antenna B2 MPE %:	<b>2.18%</b>	Antenna C2 MPE %:	<b>2.18%</b>
Antenna #:	3	Antenna #:	3	Antenna #:	3
Make / Model:	Ericsson AIR 6449	Make / Model:	Ericsson AIR 6449	Make / Model:	Ericsson AIR 6449
Frequency Bands:	2500 MHz / 2500 MHz	Frequency Bands:	2500 MHz / 2500 MHz	Frequency Bands:	2500 MHz / 2500 MHz
Gain:	22.05 dBd / 22.05 dBd	Gain:	22.05 dBd / 22.05 dBd	Gain:	22.05 dBd / 22.05 dBd
Height (AGL):	166 feet	Height (AGL):	166 feet	Height (AGL):	166 feet
Channel Count:	2	Channel Count:	2	Channel Count:	2
Total TX Power (W):	240 Watts	Total TX Power (W):	240 Watts	Total TX Power (W):	240 Watts
ERP (W):	38,477.89	ERP (W):	38,477.89	ERP (W):	38,477.89
Antenna A3 MPE %:	<b>5.02%</b>	Antenna B3 MPE %:	<b>5.02%</b>	Antenna C3 MPE %:	<b>5.02%</b>

Site Composite MPE %	
Carrier	MPE %
T-Mobile (Max at Sector A):	8.87%
Sigfox	0.03%
Verizon	4.98%
Clearwire	0.12%
Sprint	2.73%
AT&T	6.51%
<b>Site Total MPE % :</b>	<b>23.24%</b>

T-Mobile MPE % Per Sector	
T-Mobile Sector A Total:	8.87%
T-Mobile Sector B Total:	8.87%
T-Mobile Sector C Total:	8.87%
Site Total MPE % :	23.24%

### T-Mobile Maximum MPE Power Values (Sector A)

T-Mobile Frequency Band / Technology (Sector A)	# Channels	Watts ERP (Per Channel)	Height (feet)	Total Power Density ( $\mu\text{W}/\text{cm}^2$ )	Frequency (MHz)	Allowable MPE ( $\mu\text{W}/\text{cm}^2$ )	Calculated % MPE
T-Mobile 1900 MHz GSM	4	1028.30	166.0	5.37	1900 MHz GSM	1000	0.54%
T-Mobile 1900 MHz LTE	2	2056.61	166.0	5.37	1900 MHz LTE	1000	0.54%
T-Mobile 2100 MHz LTE	2	2307.55	166.0	6.02	2100 MHz LTE	1000	0.60%
T-Mobile 600 MHz LTE	2	591.73	166.0	1.54	600 MHz LTE	400	0.39%
T-Mobile 600 MHz NR	1	1577.94	166.0	2.06	600 MHz NR	400	0.51%
T-Mobile 700 MHz LTE	2	648.82	166.0	1.69	700 MHz LTE	467	0.36%
T-Mobile 1900 MHz LTE	2	2203.69	166.0	5.75	1900 MHz LTE	1000	0.58%
T-Mobile 2100 MHz UMTS	2	1294.56	166.0	3.38	2100 MHz UMTS	1000	0.34%
T-Mobile 2500 MHz LTE	1	19238.94	166.0	25.10	2500 MHz LTE	1000	2.51%
T-Mobile 2500 MHz NR	1	19238.94	166.0	25.10	2500 MHz NR	1000	2.51%
						<b>Total:</b>	<b>8.87%</b>

• NOTE: Totals may vary by approximately 0.01% due to summation of remainders in calculations.

## Summary

All calculations performed for this analysis yielded results that were **within** the allowable limits for general population exposure to RF Emissions.

The anticipated maximum composite contributions from the T-Mobile facility as well as the site composite emissions value with regards to compliance with FCC's allowable limits for general population exposure to RF Emissions are shown here:

T-Mobile Sector	Power Density Value (%)
Sector A:	8.87%
Sector B:	8.87%
Sector C:	8.87%
T-Mobile Maximum MPE % (Sector A):	8.87%
Site Total:	23.24%
Site Compliance Status:	<b>COMPLIANT</b>

The anticipated composite MPE value for this site assuming all carriers present is **23.24%** of the allowable FCC established general population limit sampled at the ground level. This is based upon values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.