



Crown Castle
3 Corporate Park Drive, Suite 101
Clifton Park, NY 12065

March 26, 2019

Melanie A. Bachman
Acting Executive Director
Connecticut Siting Council
10 Franklin Square
New Britain, CT 06051

RE: **Notice of Exempt Modification for T-Mobile:
828402 T-Mobile Site ID: CT11160B
720 Thompson Rd Thompson, CT 06277
Latitude: 41° 58' 39.74" / Longitude: -71° 50' 47.55"**

Dear Ms. Bachman:

T-Mobile is requesting to file an Exempt Modification for an existing 144-foot monopole tower located at 720 Thompson Rd Thompson, CT 06277. T-Mobile currently maintains six (6) antennas at the 143-foot level of the existing monopole. The tower is owned by Crown Castle, USA. The property is owned by Crown Castle USA. T-Mobile now intends to swap out the six (6) existing panel antennas for six (6) proposed panel antennas as well as add three (3) RRUs and six (6) TMA's as well as one (1) hybrid fiber line.

This facility was approved by the Connecticut Siting Council Petition, an email has been sent out for the approval that was given. I have attached is the email requesting the docket with the approval from the township.

Please accept this letter as notification pursuant to Regulations of Connecticut State Agencies § 16-50j-73, for construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-72(b)(2). In accordance with R.S.C.A. § 16-50j-73, a copy of this letter is being sent to Ken Beausoleil First Selectman, the Cynthia Dunne and Zoning Enforcement Officer. Crown Castle is the tower and land owner.

1. The proposed modifications will not result in an increase in the height of the existing tower.
2. The proposed modifications will not require the extension of the site boundary.
3. The proposed modification will not increase noise levels at the facility by six decibels or more, or to levels that exceed state and local criteria.
4. The operation of the replacement antennas will not increase radio frequency emissions at the facility to a level at or above the Federal Communication Commission safety standard.

The Foundation for a Wireless World.

CrownCastle.com

Melanie A. Bachman

Page 2

5. The proposed modifications will not cause a change or alteration in the physical or environmental characteristics of the site.
6. The existing structure and its foundation can support the proposed loading.

For the foregoing reasons, T-Mobile respectfully submits that the proposed modifications to the above-reference telecommunications facility constitutes an exempt modification under R.C.S.A. § 16-50j-72(b)(2). Please send approval/rejection letter to Attn: William Stone.

Sincerely,

William Stone
Real Estate Specialist
3 Corporate Park Drive, Suite 101
Clifton Park, NY 12065
518-373-3543
William.stone@crowncastle.com

Attachments:

Tab 1: Exhibit-1: Compound plan and elevation depicting the planned changes
Tab 2: Exhibit-2: Structural Modification Report
Tab 3: Exhibit-3: General Power Density Table Report (RF Emissions Analysis Report)

cc:

Ken Beausoleil, 1st Selectman
Town of Thompson
815 Riverside Drive
North Grosvenordale, CT 06255
(860) 923-9561

Cynthia Dunne, ZEO
Town of Thompson
815 Riverside Drive
North Grosvenordale, CT 06255
(860) 923-9475


ORIGIN ID:GFLA (618) 373-3523
ANNE MARIE ZSAMBRA
CROWN CASTLE
3 CORPORATE PARK DRIVE
SUITE 101
CLETON PARK, NY 12065
UNITED STATES US

SHIP DATE: 26APR19
ACTWGT: 4.50 LB
CAD: 104924194/NET4100

BILL SENDER

TO MELANIE BACHMAN
CONNECTICUT SITING COUNCIL
10 FRANKLIN SQUARE

NEW BRITAIN CT 06051
(860) 827-2951 REF: 17656980
INV. DEPT.
PO.



565J1D7E523AD

TRK# 7750 6929 6815
0201

MON - 29 APR 10:30A
PRIORITY OVERNIGHT

DSR
06051
BDL
ct:us

SEBDLA



After printing this label:

1. Use the 'Print' button on this page to print your label to your laser or inkjet printer.
2. Fold the printed page along the horizontal line.
3. Place label in shipping pouch and affix it to your shipment so that the barcode portion of the label can be read and scanned.

Warning: Use only the printed original label for shipping. Using a photocopy of this label for shipping purposes is fraudulent and could result in additional billing charges, along with the cancellation of your FedEx account number.

Use of this system constitutes your agreement to the service conditions in the current FedEx Service Guide, available on fedex.com. FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1,000, e.g. jewelry, precious metals, negotiable instruments and other items listed in our ServiceGuide. Written claims must be filed within strict time limits, see current FedEx Service Guide.


ORIGIN ID: GFLA (518) 373-3523
ANNE MARE ZSAMBA
CROWN CASTLE
3 CORPORATE PARK DRIVE
SUITE 101
CLIFTON PARK, NY 12065
UNITED STATES US

SHIP DATE: 26APR19
ACT WGT: 1.50 LB
CAD: 104924194/NET4100
BILL SENDER

TO 1ST SELECTMAN'S OFFICE
TOWN OF THOMPSON
815 RIVERSIDE DR

NORTH GROSVENORDALE CT 06255
REF: 17347690
DEPT:
PO:
INV: (860) 923-9561

565J11D7E523AD




J181019010701uv

TRK# 7750 6931 8386
0201

MON - 29 APR 4:30P
PRIORITY OVERNIGHT
DSR

SCORHA

06255
CT-US BOS

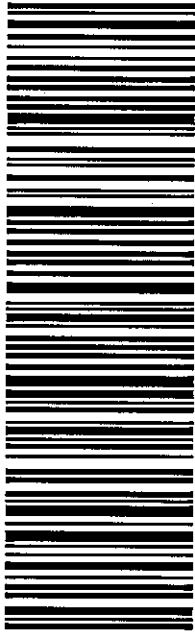

After printing this label:

1. Use the 'Print' button on this page to print your label to your laser or inkjet printer.
2. Fold the printed page along the horizontal line.
3. Place label in shipping pouch and affix it to your shipment so that the barcode portion of the label can be read and scanned.

Warning: Use only the printed original label for shipping. Using a photocopy of this label for shipping purposes is fraudulent and could result in additional billing charges, along with the cancellation of your FedEx account number.


Use of this system constitutes your agreement to the service conditions in the current FedEx Service Guide, available on fedex.com. FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1,000, e.g. jewelry, precious metals, negotiable instruments and other items listed in our Service Guide. Written claims must be filed within strict time limits, see current FedEx Service Guide.

ORIGIN:IDGFLA (518) 373-3523
ANNE MARIE ZSAMBRA
CROWN CASTLE
3 CORPORATE PARK DRIVE
SUITE 101
CLIFTON PARK, NY 12065
UNITED STATES US

SHIP DATE: 26APR19
ACTWGT: 1.50 LB
CAD: 104924194/NET4100
BILL SENDER

TO ZONING ENFORCEMENT OFFICER
TOWN OF THOMPSON
815 RIVERSIDE DR

NORTH GROSVENORDALE CT 06255
REF: 17347880
DEPT:
PO:
NV:
(860) 923-9561

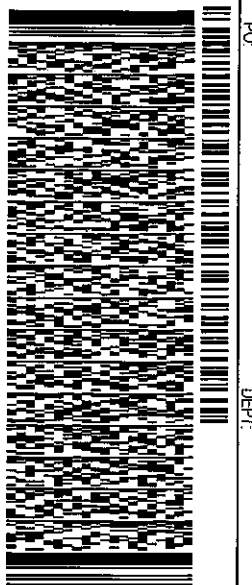


J101010010787

TRK# 7750 6932 7391
0201

MON - 29 APR 4:30P
PRIORITY OVERNIGHT
DSR

SCORHA

06255
BOS
CT-US

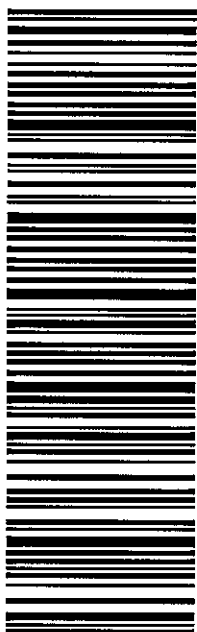

565J11D7E523AD

After printing this label:

1. Use the 'Print' button on this page to print your label to your laser or inkjet printer.
2. Fold the printed page along the horizontal line.
3. Place label in shipping pouch and affix it to your shipment so that the barcode portion of the label can be read and scanned.

Warning: Use only the printed original label for shipping. Using a photocopy of this label for shipping purposes is fraudulent and could result in additional billing charges, along with the cancellation of your FedEx account number.

Use of this system constitutes your agreement to the service conditions in the current FedEx Service Guide, available on fedex.com. FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1,000, e.g. jewelry, precious metals, negotiable instruments and other items listed in our Service Guide. Written claims must be filed within strict time limits, see current FedEx Service Guide.

Badawi, Nesmet (Contractor)

From: ZEO@thompsonct.org
Sent: Wednesday, February 6, 2019 10:22 AM
To: Badawi, Nesmet (Contractor)
Subject: 720 Thompson Rd

CAUTION: This email originated from outside of the organization. Do not click links or open attachments unless you recognize the sender and know the content is safe.

In response to your inquiry at 720 Thompson Rd, I found the following information:

Certificate of Zoning Permit:

03/26/98 - Re: Omnipoint Telecommunications

08/17/99 - Co-Location on existing Tower- revised 11/04/99

11/03/99 - Co-locating an existing Moro-Pole Antenna by Nexter Communications

11/14/05 - no notation on zoning permit, but building permit states Reinforcing Existing Telecommunication Ground Plate.

If I can be of further assistance please call me at 860-923-9475, my office hours are Mon, Wed and Fri 9 am to 2 pm.

Cindy Dunne

ZEO Town of Thompson

860-923-9475

zeo@thompsonct.org

Office Hours Mon, Wed, and Fri 9 am to 2 pm

720 THOMPSON RD

Location 720 THOMPSON RD

Mblu 120/ 30/ 14/ 1/

Acct# 005601

Owner MELROSE ASSOCIATION
LIMITED PART

Assessment \$235,100

Appraisal \$335,800

PID 3748

Building Count 1

Current Value

Appraisal			
Valuation Year	Improvements	Land	Total
2015	\$135,800	\$200,000	\$335,800

Assessment			
Valuation Year	Improvements	Land	Total
2015	\$95,100	\$140,000	\$235,100

Owner of Record

Owner	MELROSE ASSOCIATION LIMITED PART	Sale Price	\$0
Co-Owner	C/O CROWN CASTLE	Certificate	
Address	PMB 331 4017 WASHINGTON RD MCMURRAY, PA 15317	Book & Page	0163/0152
		Sale Date	11/03/1983

Ownership History

Ownership History				
Owner	Sale Price	Certificate	Book & Page	Sale Date
MELROSE ASSOCIATION LIMITED PART	\$0		0163/0152	11/03/1983

Building Information

Building 1 : Section 1

Year Built:
Living Area: 0
Replacement Cost: \$0
Building Percent
Good:
Replacement Cost
Less Depreciation: \$0

Building Photo

Building Attributes	
Field	Description
Style	Outbuildings

Model	
Grade:	
Stories:	
Occupancy	
Exterior Wall 1	
Exterior Wall 2	
Roof Structure:	
Roof Cover	
Interior Wall 1	
Interior Wall 2	
Interior Flr 1	
Interior Flr 2	
Heat Fuel	
Heat Type:	
AC Type:	
Total Bedrooms:	
Total Bthrms:	
Total Half Baths:	
Total Xtra Fixtrs:	
Total Rooms:	
Bath Style:	
Kitchen Style:	



(<http://images.vgsi.com/photos/ThompsonCTPhotos//\00\00\37\28.jpg>)

Building Layout



Building Sub-Areas (sq ft)	Legend
No Data for Building Sub-Areas	

Extra Features

Extra Features	Legend
No Data for Extra Features	

Land

Land Use

Use Code	390A
Description	DEVEL LAND MDL-00
Zone	IND
Neighborhood	
Alt Land Appr Category	No

Land Line Valuation

Size (Acres)	0
Frontage	0
Depth	0
Assessed Value	\$140,000
Appraised Value	\$200,000

Outbuildings

Outbuildings						Legend
Code	Description	Sub Code	Sub Description	Size	Value	Bldg #
TWR2	MONOPOLE			140 HEIGHT	\$113,400	1
CB1	PRECAST CONC CELL			77 S.F.	\$9,100	1
FN5	FENCE-10'CHAIN			400 L.F.	\$13,300	1

Valuation History

Appraisal			
Valuation Year	Improvements	Land	Total
2017	\$135,800	\$200,000	\$335,800
2016	\$135,800	\$200,000	\$335,800
2014	\$135,800	\$200,000	\$335,800

Assessment			
Valuation Year	Improvements	Land	Total
2017	\$95,100	\$140,000	\$235,100
2016	\$95,100	\$140,000	\$235,100
2014	\$95,100	\$140,000	\$235,100


(c) 2016 Vision Government Solutions, Inc. All rights reserved.

SHEET INDEX	
NO.	DESCRIPTION
T1	TITLE PAGE
N1	NOTES
C1	PLAN & ELEVATION
C2	RF CHART AND ORIENTATION
D1	EQUIPMENT DETAILS
E1	GROUNDING & ELECTRICAL DETAILS

TOWER OWNER NOTIFICATION

ONCE THE CONTRACTOR HAS RECEIVED AND ACCEPTED THE NOTICE TO PROCEED, CONTRACTOR WILL CONTACT THE CROWN CASTLE CONSTRUCTION MANAGER OF RECORD (NOTED ON THE FIRST PAGE ON THIS CONSTRUCTION DRAWING) A MINIMUM OF 48 HOURS PRIOR TO WORK START. UPON ARRIVAL TO THE JOB SITE, CONTRACTOR CREW IS REQUIRED CALL 1-800-788-7011 TO NOTIFY THE CROWN CASTLE NOC WORK HAS BEGUN.

LOCATION MAP

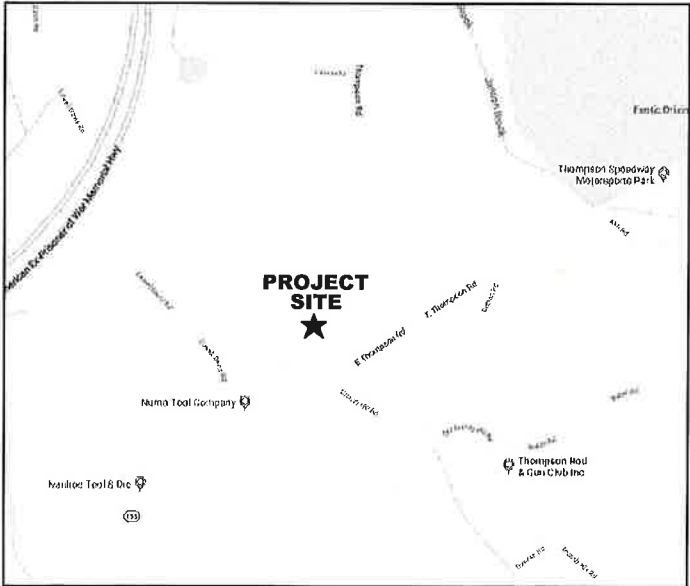

GENERAL NOTES

- HANDICAP ACCESS REQUIREMENTS ARE NOT REQUIRED.
- FACILITY IS UNMANNED AND NOT FOR HUMAN HABITATION.
- FACILITY HAS NO PLUMBING OR REFRIGERANTS.
- THIS FACILITY SHALL MEET OR EXCEED ALL FAA AND FCC REGULATORY REQUIREMENTS.
- ALL NEW MATERIAL SHALL BE FURNISHED AND INSTALLED BY CONTRACTOR UNLESS NOTED OTHERWISE. EQUIPMENT, ANTENNAS/RRH AND CABLES FURNISHED BY OWNER AND INSTALLED BY CONTRACTOR.
- THE PROJECT WILL NOT RESULT IN ANY SIGNIFICANT DISTURBANCE OR EFFECT ON STORMWATER DRAINAGE.
- NO SANITARY SEWER, POTABLE WATER, OR TRASH DISPOSAL SERVICE IS REQUIRED
- NO COMMERCIAL SIGNAGE IS PROPOSED

CODE COMPLIANCE

ALL WORK AND MATERIALS SHALL BE PERFORMED AND INSTALLED IN ACCORDANCE WITH THE CURRENT EDITIONS OF THE FOLLOWING CODES AS ADOPTED WITH ANY LOCAL AMENDMENTS BY THE LOCAL GOVERNING AUTHORITIES:

- 2018 CONNECTICUT STATE BUILDING CODE
- 2018 CONNECTICUT STATE FIRE SAFETY CODE
- 2015 INTERNATIONAL BUILDING CODE
- 2017 NATIONAL ELECTRICAL CODE (NFPA 70)
- NATIONAL FIRE PROTECTION ASSOCIATION 101
- NATIONAL FIRE PROTECTION ASSOCIATION 1
- LOCAL BUILDING CODES
- CITY/COUNTY ORDINANCES
- AMERICAN INSTITUTE OF STEEL CONSTRUCTION SPECIFICATIONS (AISC)
- UNDERWRITERS LABORATORIES APPROVED ELECTRICAL PRODUCTS.
- ANSI EIA/TIA 222 REV. H
- TIA 607
- INSTITUTE FOR ELECTRICAL AND ELECTRONICS ENGINEERS 81
- IEEE C2 (LATEST EDITION)
- TELCORDIA GR-1275
- ANSI T1.311



CBU
828402
SITE ID
CT11160B
SITE NAME
THOMPSON/I-395 X99_1
SITE ADDRESS
 720 THOMPSON ROAD
 THOMPSON, CT 06277
CONFIGURATION
67D94B OUTDOOR

PROJECT SITE INFORMATION

SITE ID:	CT11160B
SITE NAME:	THOMPSON/I-395 X99_1
SITE ADDRESS:	720 THOMPSON ROAD THOMPSON, CT 06277
PERMITTING JURISDICTION:	TOWN OF THOMPSON
COUNTY:	WINDHAM
ZONING:	IND
SITE COORDINATES:	
LATITUDE:	41° 58' 39.74" N (41.977706°) (NAD 83)
LONGITUDE:	71° 50' 47.55" W (-71.846542°) (NAD 83)
APPLICANT:	T-MOBILE NORTHEAST LLC 103 MONARCH DRIVE LIVERPOOL, NY 13088

STRUCTURAL ANALYSIS INFORMATION

TOWER ANALYSIS

BASED ON THE STRUCTURAL ANALYSIS COMPLETED BY PJF DATED 07/20/2018. THE EXISTING TOWER IS CAPABLE OF SUPPORTING THE PROPOSED EQUIPMENT CONFIGURATION.

ANTENNA MOUNTS

INFINIGY ENGINEERING HAS NOT EVALUATED THE EXISTING MOUNTS FOR THIS SITE, AND ASSUMES NO RESPONSIBILITY FOR ITS STRUCTURAL INTEGRITY. REFER TO PASSING MOUNT ANALYSIS PRIOR TO ANY CONSTRUCTION.

PROJECT TEAM INFORMATION

CLIENT REPRESENTATIVE:	CROWN CASTLE 3 CORPORATE PARK DRIVE SUITE 101 CLIFTON PARK, NY 12065
CLIENT REP. CONTACT:	WILL STONE (518) 373-3543
ENGINEER:	INFINIGY 6865 DEERPATH ROAD SUITE 152 ELKRDIDGE, MD 21075
ENGINEER CONTACT:	MATTHEW LIVERETTE (518) 690-0790

SCOPE OF WORK

SCOPE OF WORK:
 (3SEC-67D94B) CONNECTICUT MARKET. REPLACING (6) EXISTING ANTENNAS WITH NEW MODELS (2 PER SECTOR). ADDING (6) NEW ANTENNAS, (2) PER SECTOR, ADDING (3) RRUS AND (1) HYBRID CABLE. REMOVE (6) TMAs AND ADDING (6) TMAs.

GROUND CHANGES: KEEPING (1) EXISTING CABINET - NO OTHER CHANGES MADE TO LEASED GROUND SPACE.

FINAL CONFIGURATION: (6) ANTENNAS, (6) TMAs, (1) HYBRID CABLE AND (3) RRUS.

TO OBTAIN LOCATION OF PARTICIPANTS UNDERGROUND FACILITIES BEFORE YOU DIG IN CONNECTICUT, CONTACT CALL BEFORE YOU DIG TOLL FREE: 1-800-922-4455 OR www.cbyd.com

CONNECTICUT STATUTE REQUIRES MIN OF 2 WORKING DAYS NOTICE BEFORE YOU EXCAVATE

T-MOBILE NORTHEAST LLC
103 MONARCH DRIVE
LIVERPOOL, NY 13088

INFINIGY & ENGINEERING, PLLC
1033 WATERVLIET SHAKER RD
ALBANY, NY 12205

UNAUTHORIZED ALTERATION OR ADDITION TO THIS DOCUMENT IS A VIOLATION OF APPLICABLE STATE AND/OR LOCAL LAWS

ISSUED FOR CONSTRUCTION	RMS	01/30/19
A	ISSUED FOR REVIEW	RMS 11/12/18
No.	Submitted / Revision	App'd Date
	Drawn: _____ RMS	
	Designed: _____ MRL	
	Checked: _____ AD	
Project Number: 600-007		

Project Title:
CT11160B
 THOMPSON/I-395
 X99_1
 720 THOMPSON ROAD
 THOMPSON, CT 06277

Prepared For:

TITLE PAGE

Drawing Title
T1

Drawing Number
T1

GENERAL NOTES

PART 1 – GENERAL REQUIREMENTS

- 1.1 THE WORK SHALL COMPLY WITH APPLICABLE NATIONAL CODES AND STANDARDS, LATEST EDITION, AND PORTIONS THEREOF, INCLUDED BUT NOT LIMITED TO THE FOLLOWING:
 - A. GR-63-CORE NEBS REQUIREMENTS: PHYSICAL PROTECTION
 - B. GR-78-CORE GENERIC REQUIREMENTS FOR THE PHYSICAL DESIGN AND MANUFACTURE OF TELECOMMUNICATIONS EQUIPMENT.
 - C. NATIONAL FIRE PROTECTION ASSOCIATION CODES AND STANDARDS (NFPA) INCLUDING NFPA 70 (NATIONAL ELECTRICAL CODE – "NEC"), AND NFPA 101 (LIFE SAFETY CODE).
 - E. AMERICAN SOCIETY FOR TESTING OF MATERIALS (ASTM).
 - F. INSTITUTE OF ELECTRONIC AND ELECTRICAL ENGINEERS (IEEE).
- 1.2 DEFINITIONS:
 - A. WORK: THE SUM OF TASKS AND RESPONSIBILITIES IDENTIFIED IN THE CONTRACT DOCUMENTS.
 - B. COMPANY: T-MOBILE CORPORATION
 - C. ENGINEER: SYNONYMOUS WITH ARCHITECT & ENGINEER AND "A&E", THE DESIGN PROFESSIONAL HAVING PROFESSIONAL RESPONSIBILITY FOR DESIGN OF THE PROJECT.
 - D. CONTRACTOR: CONSTRUCTION CONTRACTOR; CONSTRUCTION VENDOR; INDIVIDUAL OR ENTITY WHO AFTER EXECUTION OF A CONTRACT IS BOUND TO ACCOMPLISH THE WORK.
 - E. THIRD PARTY VENDOR OR AGENCY: A VENDOR OR AGENCY ENGAGED SEPARATELY BY THE COMPANY, A&E, OR CONTRACTOR TO PROVIDE MATERIALS OR TO ACCOMPLISH SPECIFIC TASKS RELATED TO BUT NOT INCLUDED IN THE WORK.
- 1.3 POINT OF CONTACT: COMMUNICATION BETWEEN THE COMPANY AND THE CONTRACTOR SHALL FLOW THROUGH THE SINGLE COMPANY SITE DEVELOPMENT SPECIALIST OR OTHER PROJECT COORDINATOR APPOINTED TO MANAGE THE PROJECT FOR THE COMPANY.
- 1.4 ON-SITE SUPERVISION: THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE WORK AND SHALL BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, AND PROCEDURES IN ACCORDANCE WITH THE CONTRACT DOCUMENTS. THE CONTRACTOR SHALL EMPLOY A COMPETENT SUPERINTENDENT WHO SHALL BE IN ATTENDANCE AT THE SITE AT ALL TIMES DURING PERFORMANCE OF THE WORK.
- 1.5 DRAWINGS, SPECIFICATIONS AND DETAILS REQUIRED AT JOBSITE: THE CONSTRUCTION CONTRACTOR SHALL MAINTAIN A FULL SET OF THE CONSTRUCTION DRAWINGS, STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES, AND THE STANDARD CONSTRUCTION SPECIFICATIONS FOR WIRELESS SITES AT THE JOBSITE FROM MOBILIZATION THROUGH CONSTRUCTION COMPLETION.
 - A. THE JOBSITE DRAWINGS, SPECIFICATIONS AND DETAILS SHALL BE CLEARLY MARKED DAILY IN PENCIL WITH ANY CHANGES IN CONSTRUCTION OVER WHAT IS DEPICTED IN THE DOCUMENTS. AT CONSTRUCTION COMPLETION, THIS JOBSITE MARKUP SET SHALL BE DELIVERED TO THE COMPANY OR COMPANY'S DESIGNATED REPRESENTATIVE TO BE FORWARDED TO THE COMPANY'S A&E VENDOR FOR PRODUCTION OF "AS-BUILT" DRAWINGS.
- 1.6 USE OF JOB SITE: THE CONTRACTOR SHALL CONFINE ALL CONSTRUCTION AND RELATED OPERATIONS INCLUDING STAGING AND STORAGE OF MATERIALS AND EQUIPMENT, PARKING, TEMPORARY FACILITIES, AND WASTE STORAGE TO THE LEASE PARCEL UNLESS OTHERWISE PERMITTED BY THE CONTRACT DOCUMENTS.
- 1.7 NOTICE TO PROCEED:
 - A. NO WORK SHALL COMMENCE PRIOR TO COMPANY'S WRITTEN NOTICE TO PROCEED.
 - B. UPON RECEIVING NOTICE TO PROCEED, CONTRACTOR SHALL FULLY PERFORM ALL WORK NECESSARY TO PROVIDE T-MOBILE WITH AN OPERATIONAL WIRELESS FACILITY.

PART 2 – EXECUTION

- 2.1 TEMPORARY UTILITIES AND FACILITIES: THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL TEMPORARY UTILITIES AND FACILITIES NECESSARY EXCEPT AS OTHERWISE INDICATED IN THE CONSTRUCTION DOCUMENTS. TEMPORARY UTILITIES AND FACILITIES INCLUDE, POTABLE WATER, HEAT, HVAC, ELECTRICITY, SANITARY FACILITIES, WASTE DISPOSAL FACILITIES, AND TELEPHONE/COMMUNICATION SERVICES. PROVIDE TEMPORARY UTILITIES AND FACILITIES IN ACCORDANCE WITH OSHA AND THE AUTHORITY HAVING JURISDICTION. CONTRACTOR MAY UTILIZE THE COMPANY ELECTRICAL SERVICE IN THE COMPLETION OF THE WORK WHEN IT BECOMES AVAILABLE. USE OF THE LESSORS OR SITE OWNER'S UTILITIES OR FACILITIES IS EXPRESSLY FORBIDDEN EXCEPT AS OTHERWISE ALLOWED IN THE CONTRACT DOCUMENTS.
- 2.2 ACCESS TO WORK: THE CONTRACTOR SHALL PROVIDE ACCESS TO THE JOB SITE FOR AUTHORIZED COMPANY PERSONNEL AND AUTHORIZED REPRESENTATIVES OF THE ARCHITECT/ENGINEER DURING ALL PHASES OF THE WORK.
- 2.3 TESTING: REQUIREMENTS FOR TESTING BY THIS CONTRACTOR SHALL BE AS INDICATED HEREWITH, ON THE CONSTRUCTION DRAWINGS, AND IN THE INDIVIDUAL SECTIONS OF THESE SPECIFICATIONS. SHOULD COMPANY CHOOSE TO ENGAGE ANY THIRD-PARTY TO CONDUCT ADDITIONAL TESTING, THE CONTRACTOR SHALL COOPERATE WITH AND PROVIDE A WORK AREA FOR COMPANY'S TEST AGENCY.

- 2.4 COMPANY FURNISHED MATERIAL AND EQUIPMENT: ALL HANDLING, STORAGE AND INSTALLATION OF COMPANY FURNISHED MATERIAL AND EQUIPMENT SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE CONTRACT DOCUMENTS AND WITH THE MANUFACTURER'S INSTRUCTIONS AND RECOMMENDATIONS.
 - A. CONTRACTOR SHALL PROCURE ALL OTHER REQUIRED WORK RELATED MATERIALS NOT PROVIDED BY T-MOBILE TO SUCCESSFULLY CONSTRUCT A WIRELESS FACILITY.
- 2.5 DIMENSIONS: VERIFY DIMENSIONS INDICATED ON DRAWINGS WITH FIELD DIMENSIONS BEFORE FABRICATION OR ORDERING OF MATERIALS. DO NOT SCALE DRAWINGS.
- 2.6 EXISTING CONDITIONS: NOTIFY THE COMPANY REPRESENTATIVE OF EXISTING CONDITIONS DIFFERING FROM THOSE INDICATED ON THE DRAWINGS. DO NOT REMOVE OR ALTER STRUCTURAL COMPONENTS WITHOUT PRIOR WRITTEN APPROVAL FROM THE ARCHITECT AND ENGINEER.

PART 3 – RECEIPT OF MATERIAL & EQUIPMENT

- 3.1 RECEIPT OF MATERIAL AND EQUIPMENT: CONTRACTOR IS RESPONSIBLE FOR T-MOBILE PROVIDED MATERIAL AND EQUIPMENT AND UPON RECEIPT SHALL:
 - A. ACCEPT DELIVERIES AS SHIPPED AND TAKE RECEIPT.
 - B. VERIFY COMPLETENESS AND CONDITION OF ALL DELIVERIES.
 - C. TAKE RESPONSIBILITY FOR EQUIPMENT AND PROVIDE INSURANCE PROTECTION AS REQUIRED IN AGREEMENT.
 - D. RECORD ANY DEFECTS OR DAMAGES AND WITHIN TWENTY-FOUR HOURS AFTER RECEIPT, REPORT TO T-MOBILE OR ITS DESIGNATED PROJECT REPRESENTATIVE OF SUCH.
 - E. PROVIDE SECURE AND NECESSARY WEATHER PROTECTED WAREHOUSING.
 - F. COORDINATE SAFE AND SECURE TRANSPORTATION OF MATERIAL AND EQUIPMENT, DELIVERING AND OFF-LOADING FROM CONTRACTOR'S WAREHOUSE TO SITE.

PART 4 – GENERAL REQUIREMENTS FOR CONSTRUCTION

- 4.1 CONTRACTOR SHALL KEEP THE SITE FREE FROM ACCUMULATING WASTE MATERIAL, DEBRIS, AND TRASH. AT THE COMPLETION OF THE WORK, CONTRACTOR SHALL REMOVE FROM THE SITE ALL REMAINING RUBBISH, IMPLEMENTS, TEMPORARY FACILITIES, AND SURPLUS MATERIALS.
- 4.2 EQUIPMENT ROOMS SHALL AT ALL TIMES BE MAINTAINED "BROOM CLEAN" AND CLEAR OF DEBRIS.
- 4.3 CONTRACTOR SHALL TAKE ALL REASONABLE PRECAUTIONS TO DISCOVER AND LOCATE ANY HAZARDOUS CONDITION.
 - A. IN THE EVENT CONTRACTOR ENCOUNTERS ANY HAZARDOUS CONDITION WHICH HAS NOT BEEN ABATED OR OTHERWISE MITIGATED, CONTRACTOR AND ALL OTHER PERSONS SHALL IMMEDIATELY STOP WORK IN THE AFFECTED AREA AND NOTIFY COMPANY IN WRITING. THE WORK IN THE AFFECTED AREA SHALL NOT BE RESUMED EXCEPT BY WRITTEN NOTIFICATION BY COMPANY.
 - B. CONTRACTOR AGREES TO USE CARE WHILE ON THE SITE AND SHALL NOT TAKE ANY ACTION THAT WILL OR MAY RESULT IN OR CAUSE THE HAZARDOUS CONDITION TO BE FURTHER RELEASED IN THE ENVIRONMENT, OR TO FURTHER EXPOSE INDIVIDUALS TO THE HAZARD.
- 4.4 CONTRACTOR'S ACTIVITIES SHALL BE RESTRICTED TO THE PROJECT LIMITS. SHOULD AREAS OUTSIDE THE PROJECT LIMITS BE AFFECTED BY CONTRACTOR'S ACTIVITIES, CONTRACTOR SHALL IMMEDIATELY RETURN THEM TO ORIGINAL CONDITION.
- 4.5 CONDUCT TESTING AS REQUIRED HEREIN.

PART 5 – TESTS AND INSPECTIONS

- 5.1 TESTS AND INSPECTIONS:
 - A. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL CONSTRUCTION TESTS, INSPECTIONS AND PROJECT DOCUMENTATION.
 - B. CONTRACTOR SHALL COORDINATE TEST AND INSPECTION SCHEDULES WITH COMPANY'S REPRESENTATIVE WHO MUST BE ON SITE TO WITNESS SUCH TESTS AND INSPECTIONS.
 - C. WHEN THE USE OF A THIRD PARTY INDEPENDENT TESTING AGENCY IS REQUIRED, THE AGENCY THAT IS SELECTED MUST PERFORM SUCH WORK ON A REGULAR BASIS IN THE STATE WHERE THE PROJECT IS LOCATED AND HAVE A THOROUGH UNDERSTANDING OF LOCAL AVAILABLE MATERIALS, INCLUDING THE SOIL, ROCK, AND GROUNDWATER CONDITIONS.
 - D. THE THIRD PARTY TESTING AGENCY IS TO BE FAMILIAR WITH THE APPLICABLE REQUIREMENTS FOR THE TESTS TO BE DONE, EQUIPMENT TO BE USED, AND ASSOCIATED HEALTH AND SAFETY ISSUES.
 - E. SITE RESISTANCE TO EARTH TESTING PER EXHIBIT: CELL SITE GROUNDING SYSTEM DESIGN.

- F. ANTENNA AND COAX SWEEP TESTS PER EXHIBIT: ANTENNA TRANSMISSION LINE ACCEPTANCE STANDARDS.
- G. ALL OTHER TESTS REQUIRED BY COMPANY OR JURISDICTION.

PART 6 – TRENCHING AND BACKFILLING

- 6.1 TRENCHING AND BACKFILLING: THE CONTRACTOR SHALL PERFORM ALL EXCAVATION OF EVERY DESCRIPTION AND OF WHATEVER SUBSTANCES ENCOUNTERED, TO THE DEPTHS INDICATED ON THE CONSTRUCTION DRAWINGS OR AS OTHERWISE SPECIFIED.
 - A. PROTECTION OF EXISTING UTILITIES: THE CONTRACTOR SHALL CHECK WITH THE LOCAL UTILITIES AND THE RESPECTIVE UTILITY LOCATOR COMPANIES PRIOR TO STARTING EXCAVATION OPERATIONS IN EACH RESPECTIVE AREA TO ASCERTAIN THE LOCATIONS OF KNOWN UTILITY LINES. THE LOCATIONS, NUMBER AND TYPES OF EXISTING UTILITY LINES DETAILED ON THE CONSTRUCTION DRAWINGS ARE APPROXIMATE AND DO NOT REPRESENT EXACT INFORMATION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING ALL LINES DAMAGED DURING EXCAVATION AND ALL ASSOCIATED OPERATIONS. ALL UTILITY LINES UNCOVERED DURING THE EXCAVATION OPERATIONS, SHALL BE PROTECTED FROM DAMAGE DURING EXCAVATION AND ASSOCIATED OPERATIONS. ALL REPAIRS SHALL BE APPROVED BY THE UTILITY COMPANY.
 - B. HAND DIGGING: UNLESS APPROVED IN WRITING OTHERWISE, ALL DIGGING WITHIN AN EXISTING CELL SITE COMPOUND IS TO BE DONE BY HAND.
 - C. DURING EXCAVATION, MATERIAL SUITABLE FOR BACKFILLING SHALL BE STOCKPILED IN AN ORDERLY MANNER A SUFFICIENT DISTANCE FROM THE BANKS OF THE TRENCH TO AVOID OVERLOADING AND TO PREVENT SLIDES OR CAVE-INS. ALL EXCAVATED MATERIALS NOT REQUIRED OR SUITABLE FOR BACKFILL SHALL BE REMOVED AND DISPOSED OF AT THE CONTRACTOR'S EXPENSE.
 - D. GRADING SHALL BE DONE AS MAY BE NECESSARY TO PREVENT SURFACE WATER FROM FLOWING INTO TRENCHES OR OTHER EXCAVATIONS, AND ANY WATER ACCUMULATING THEREIN SHALL BE REMOVED BY PUMPING OR BY OTHER APPROVED METHOD.
 - E. SHEETING AND SHORING SHALL BE DONE AS NECESSARY FOR THE PROTECTION OF THE WORK AND FOR THE SAFETY OF PERSONNEL. UNLESS OTHERWISE INDICATED, EXCAVATION SHALL BE BY OPEN CUT, EXCEPT THAT SHORT SECTIONS OF A TRENCH MAY BE TUNNELED IF, THE CONDUIT CAN BE SAFELY AND PROPERLY INSTALLED AND BACKFILL CAN BE PROPERLY TAMPED IN SUCH TUNNEL SECTIONS. EARTH EXCAVATION SHALL COMPRISE ALL MATERIALS AND SHALL INCLUDE CLAY, SILT, SAND, MUCK, GRAVEL, HARDPAN, LOOSE SHALE, AND LOOSE STONE.
 - F. TRENCHES SHALL BE OF NECESSARY WIDTH FOR THE PROPER LAYING OF THE CONDUIT OR CABLE, AND THE BANKS SHALL BE AS NEARLY VERTICAL AS PRACTICABLE. THE BOTTOM OF THE TRENCHES SHALL BE ACCURATELY GRADED TO PROVIDE UNIFORM BEARING AND SUPPORT FOR EACH SECTION OF THE CONDUIT OR CABLE ON UNDISTURBED SOIL AT EVERY POINT ALONG ITS ENTIRE LENGTH. EXCEPT WHERE ROCK IS ENCOUNTERED, CARE SHALL BE TAKEN NOT TO EXCAVATE BELOW THE DEPTHS INDICATED. WHERE ROCK EXCAVATIONS ARE NECESSARY, THE ROCK SHALL BE EXCAVATED TO A MINIMUM OVER DEPTH OF 6 INCHES BELOW THE TRENCH DEPTHS INDICATED ON THE CONSTRUCTION DRAWINGS OR SPECIFIED. OVER DEPTHS IN THE ROCK EXCAVATION AND UNAUTHORIZED OVER DEPTHS SHALL BE THOROUGHLY BACK FILLED AND TAMPED TO THE APPROPRIATE GRADE. WHENEVER WET OR OTHERWISE UNSTABLE SOIL THAT IS INCAPABLE OF PROPERLY SUPPORTING THE CONDUIT OR CABLE IS ENCOUNTERED IN THE BOTTOM OF THE TRENCH, SUCH SOLID SHALL BE REMOVED TO A MINIMUM OVER DEPTH OF 6 INCHES AND THE TRENCH BACKFILLED TO THE PROPER GRADE WITH EARTH OF OTHER SUITABLE MATERIAL, AS HEREINAFTER SPECIFIED.
 - G. BACKFILLING OF TRENCHES. TRENCHES SHALL NOT BE BACKFILLED UNTIL ALL SPECIFIED TESTS HAVE BEEN PERFORMED AND ACCEPTED. WHERE COMPACTED BACKFILL IS NOT INDICATED THE TRENCHES SHALL BE CAREFULLY BACKFILLED WITH SELECT MATERIAL SUCH AS EXCAVATED SOILS THAT ARE FREE OF ROOTS, SOD, RUBBISH OR STONES, DEPOSITED IN 6 INCH LAYERS AND THOROUGHLY AND CAREFULLY RAMMED UNTIL THE CONDUIT OR CABLE HAS A COVER OF NOT LESS THAN 1 FOOT. THE REMAINDER OF THE BACKFILL MATERIAL SHALL BE GRANULAR IN NATURE AND SHALL NOT CONTAIN ROOTS, SOD, RUBBING, OR STONES OF 2-1/2 INCH MAXIMUM DIMENSION. BACKFILL SHALL BE CAREFULLY PLACED IN THE TRENCH AND IN 1 FOOT LAYERS AND EACH LAYER TAMPED. SETTLING THE BACKFILL WITH WATER WILL BE PERMITTED. THE SURFACE SHALL BE GRADED TO A REASONABLE UNIFORMITY AND THE MOUNDING OVER THE TRENCHES LEFT IN A UNIFORM AND NEAT CONDITION.

SYMBOL	DESCRIPTION
	CIRCUIT BREAKER
	NON-FUSIBLE DISCONNECT SWITCH
	FUSIBLE DISCONNECT SWITCH
	SURFACE MOUNTED PANEL BOARD
	TRANSFORMER
	KILOWATT HOUR METER
	JUNCTION BOX
	PULL BOX TO NEC/TELCO STANDARDS
	UNDERGROUND UTILITIES
	EXOTHERMIC WELD CONNECTION
	MECHANICAL CONNECTION
	GROUND ROD
	GROUND ROD WITH INSPECTION SLEEVE
	GROUND BAR
	120AC DUPLEX RECEPTACLE
	GROUND CONDUCTOR
	DC POWER AND FIBER OPTIC TRUNK CABLES
	DC POWER CABLES

REPRESENTS DETAIL NUMBER
 REF. DRAWING NUMBER

ABBREVIATIONS

CIGBE	COAX ISOLATED GROUND BAR EXTERNAL
MIGB	MASTER ISOLATED GROUND BAR
SST	SELF SUPPORTING TOWER
GPS	GLOBAL POSITIONING SYSTEM
TYP	TYPICAL
DWG	DRAWING
BCW	BARE COPPER WIRE
BFG	BELOW FINISH GRADE
PVC	POLYVINYL CHLORIDE
CAB	CABINET
C	CONDUIT
SS	STAINLESS STEEL
G	GROUND
AWG	AMERICAN WIRE GAUGE
RGS	RIGID GALVANIZED STEEL
AHJ	AUTHORITY HAVING JURISDICTION
TTLNA	TOWER TOP LOW NOISE AMPLIFIER
UNO	UNLESS NOTED OTHERWISE
EMT	ELECTRICAL METALLIC TUBING
AGL	ABOVE GROUND LEVEL



UNAUTHORIZED ALTERATION OR ADDITION TO THIS DOCUMENT IS A VIOLATION OF APPLICABLE STATE AND/OR LOCAL LAWS

ISSUED FOR CONSTRUCTION RMS 01/30/19

ISSUED FOR REVIEW RMS 11/12/18

No Submittal / Revision App'd Date

Drawn: RMS

Designed: MRL

Checked: AND

Project Number:

600-007

Project Title:

CT11160B

THOMPSON/I-395

X99 1

720 THOMPSON ROAD

THOMPSON, CT 06277

Prepared For:



Drawing Title


NOTES

Drawing Number

N1

T-Mobile
 T-MOBILE NORTHEAST LLC
 103 MONARCH DRIVE
 LIVERPOOL, NY 13088

INFINIGY8
 ENGINEERING, PLLC
 1033 WATERLIET SHAKER RD
 ALBANY, NY 12205

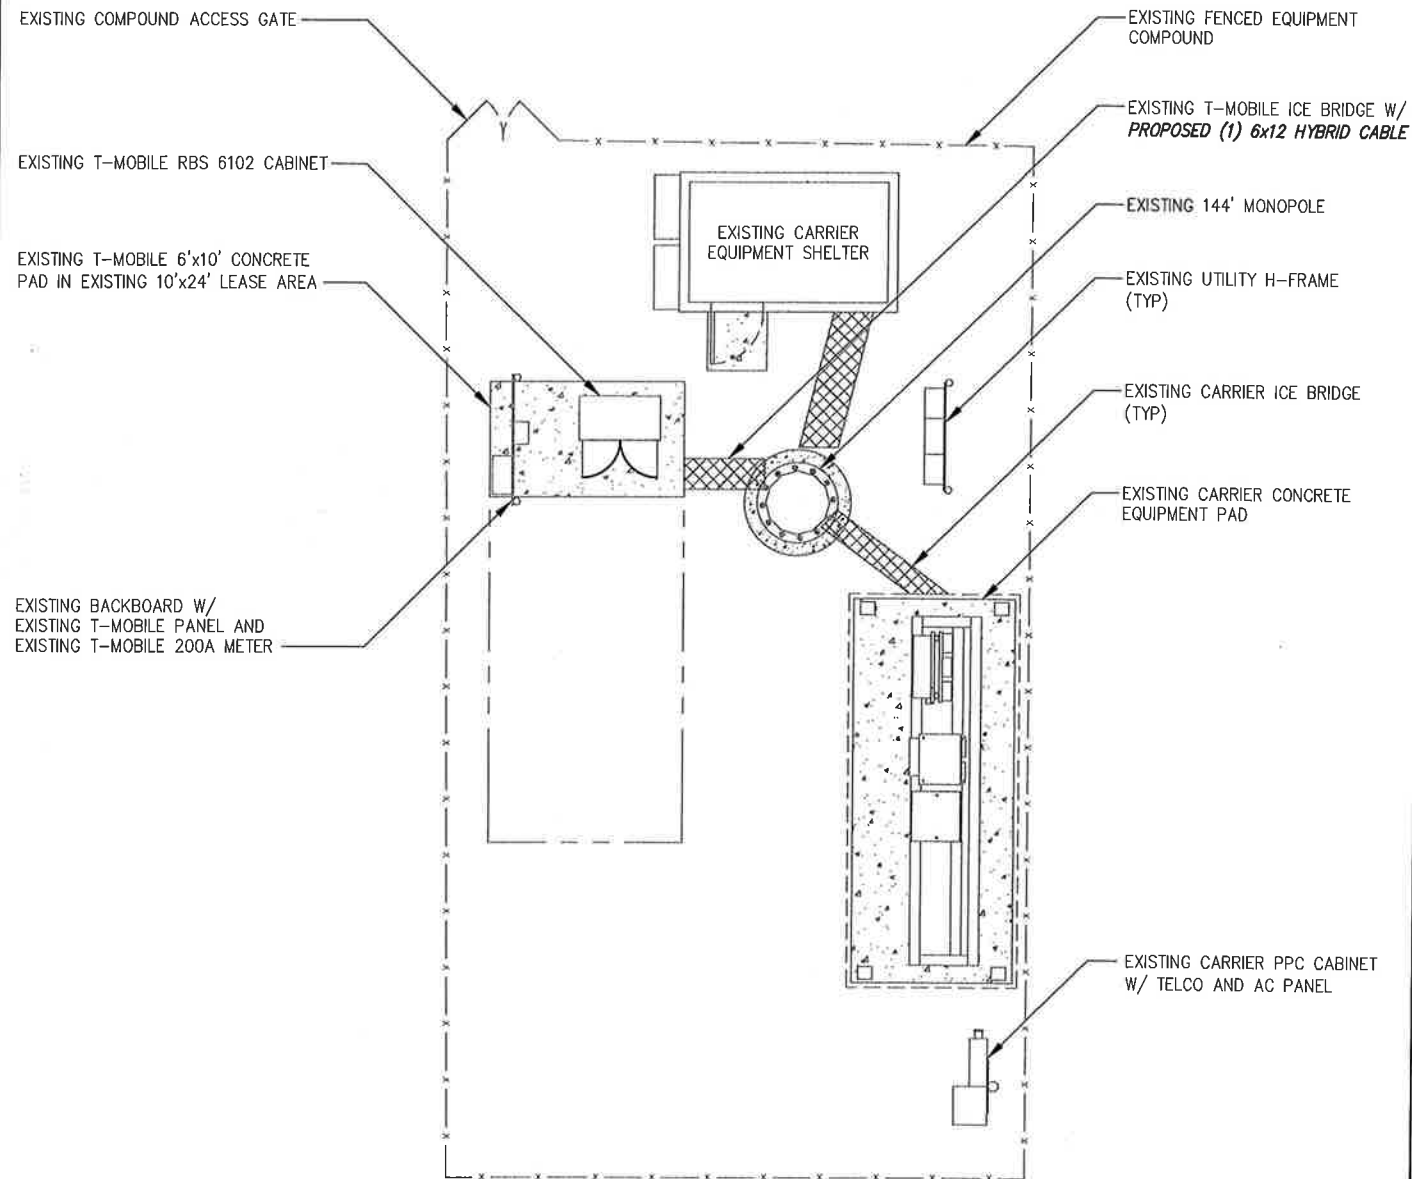


1 PLAN VIEW
 NORTH
 C1 SCALE: AS NOTED

GRAPHIC SCALE:
 10' 5' 0 5' 10'
 SCALE (11x17): 1" = 10'-0"
 SCALE (22x34): 1" = 5'-0"

TOP OF EXISTING MONOPOLE
 156'-0" AGL

T-MOBILE ANTENNA CENTERLINE
 143'-0"± AGL

GRADE LEVEL
 0'-0" AGL

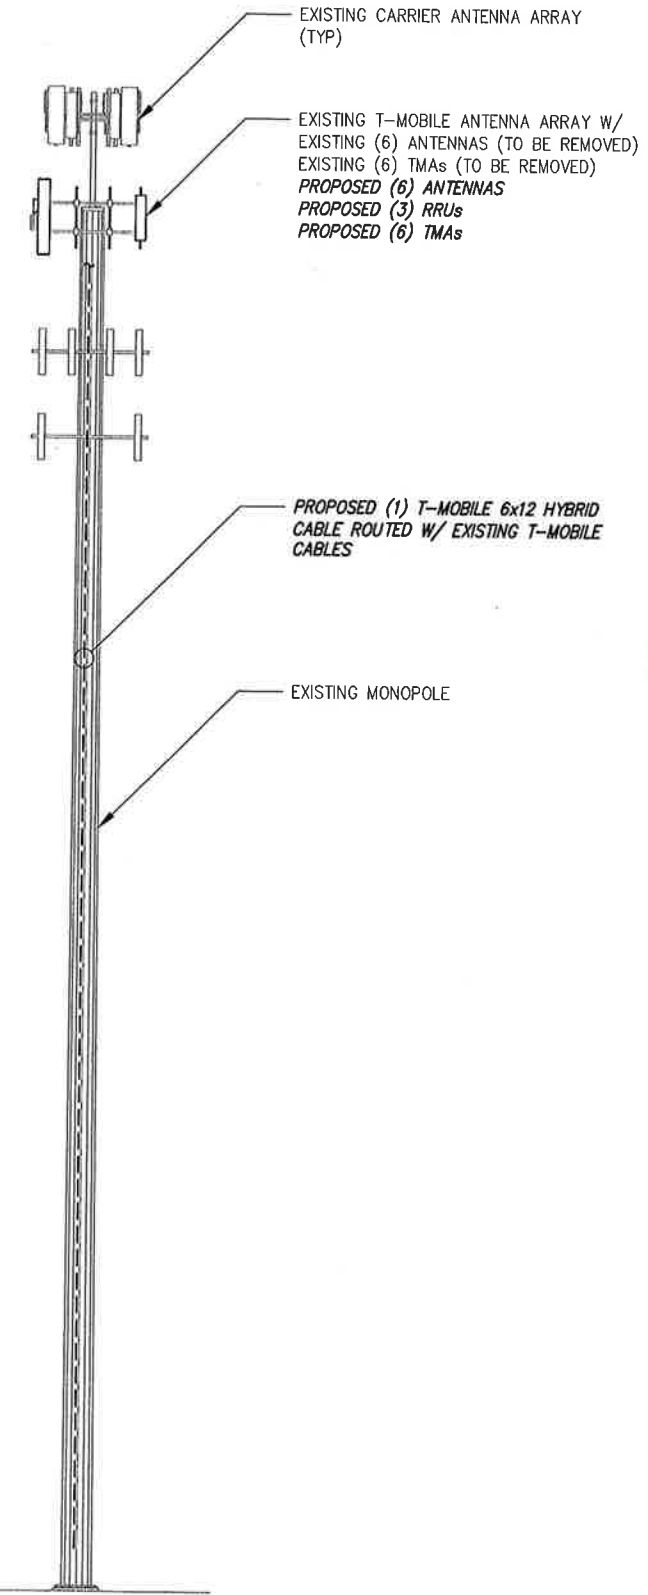

2 ELEVATION
 C1 SCALE: NOT TO SCALE

T-Mobile
 T-MOBILE NORTHEAST LLC
 103 MONARCH DRIVE
 LIVERPOOL, NY 13088

INFINIGY & ENGINEERING, PLLC
 1033 WATERVLIET SHAKER RD
 ALBANY, NY 12205



UNAUTHORIZED ALTERATION OR ADDITION TO THIS DOCUMENT IS A VIOLATION OF APPLICABLE STATE AND/OR LOCAL LAWS

ISSUED FOR CONSTRUCTION	RMS	01/30/18
ISSUED FOR REVIEW	RMS	11/12/18
No.	Submitted / Revision	App'd. Date
Drawn:	RMS	
Designed:	MRL	
Checked:	AJD	

Project Number: 600-007


Project Title:
CT11160B
 THOMPSON/I-395
 X99 1
 720 THOMPSON ROAD
 THOMPSON, CT 06277

Prepared For:
CROWN CASTLE

Drawing Title:
PLAN AND ELEVATION

Drawing Number:
C1


SECTOR	ANTENNA POSITION	ANTENNA MODEL #	VENDOR	AZIMUTH	M-TILT	E-TILT	ANTENNA CENTERLINE	TMA/RRU MODEL #	CABLE LENGTH	CABLE TYPE AND QUANTITY
ALPHA	A-1	APXVAARR24_43-U-NA20	RFS	90°	0	2' / 2' / 2'	140'-0"	ATMA4P4DBP-1A20 4449 B71+B12	EX. 175'±	(2) 1-1/4" COAX (1) 6X12 HYBRID TRUNK CABLE (SHARED BY ALL SECTORS)
	A-4	APX16DWV-16DWV-S-E-A20	RFS	90°	0	2'	140'-0"	ATMA4P4DBP-1A20	EX.	(2) 1-1/4" COAX
BETA	B-1	APXVAARR24_43-U-NA20	RFS	210°	0	2' / 2' / 2'	140'-0"	ATMA4P4DBP-1A20 4449 B71+B12	EX. 175'±	(2) 1-1/4" COAX (1) 6X12 HYBRID TRUNK CABLE (SHARED BY ALL SECTORS)
	B-4	APX16DWV-16DWV-S-E-A20	RFS	210°	0	2'	140'-0"	ATMA4P4DBP-1A20	EX.	(2) 1-1/4" COAX
GAMMA	C-1	APXVAARR24_43-U-NA20	RFS	330°	0	2' / 2' / 2'	140'-0"	ATMA4P4DBP-1A20 4449 B71+B12	EX. 175'±	(2) 1-1/4" COAX (1) 6X12 HYBRID TRUNK CABLE (SHARED BY ALL SECTORS)
	C-4	APX16DWV-16DWV-S-E-A20	RFS	330°	0	2'	140'-0"	ATMA4P4DBP-1A20	EX.	(2) 1-1/4" COAX

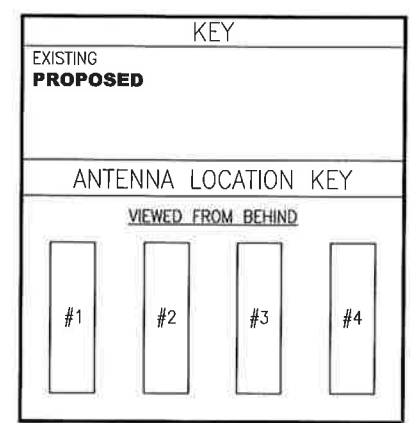


- GENERAL NOTES:
- CONTRACTOR TO VERIFY PROPOSED ANTENNA INFORMATION IS THE MOST CURRENT AT TIME OF CONSTRUCTION.
 - CONTRACTOR TO CONFIRM CABLE LENGTHS FOR ANY PROPOSED CABLES/JUMPERS PRIOR TO CONSTRUCTION.

ORIENTATION PLAN KEY				
KEY	DESCRIPTION	TYPE	QTY	STATUS
1	RV90-17-XXDP	ANTENNA	3	REMOVED
2	APXV18-206516S-C-A20	TMA	3	REMOVED
3	d B2 TMA	TMA	3	REMOVED
4	d B4 TMA	TMA	3	REMOVED
5	APX16DWV-16DWV-S-E-A20	ANTENNA	3	PROPOSED
6	APXVAARR24_43-U-NA20	ANTENNA	3	PROPOSED
7	ATMA4P4DBP-1A20	TMA	6	PROPOSED
8	4449 B71+B12	RRU	3	PROPOSED

1 RF SYSTEM CHART
C2 SCALE: NOT TO SCALE

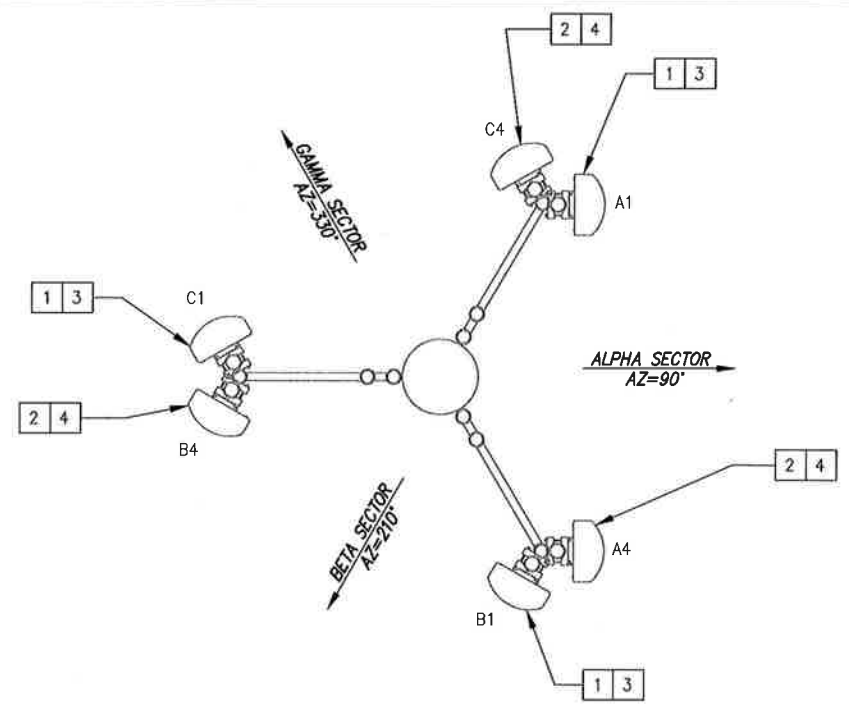

2 EXISTING ANTENNA ORIENTATION
C2 SCALE: NOT TO SCALE

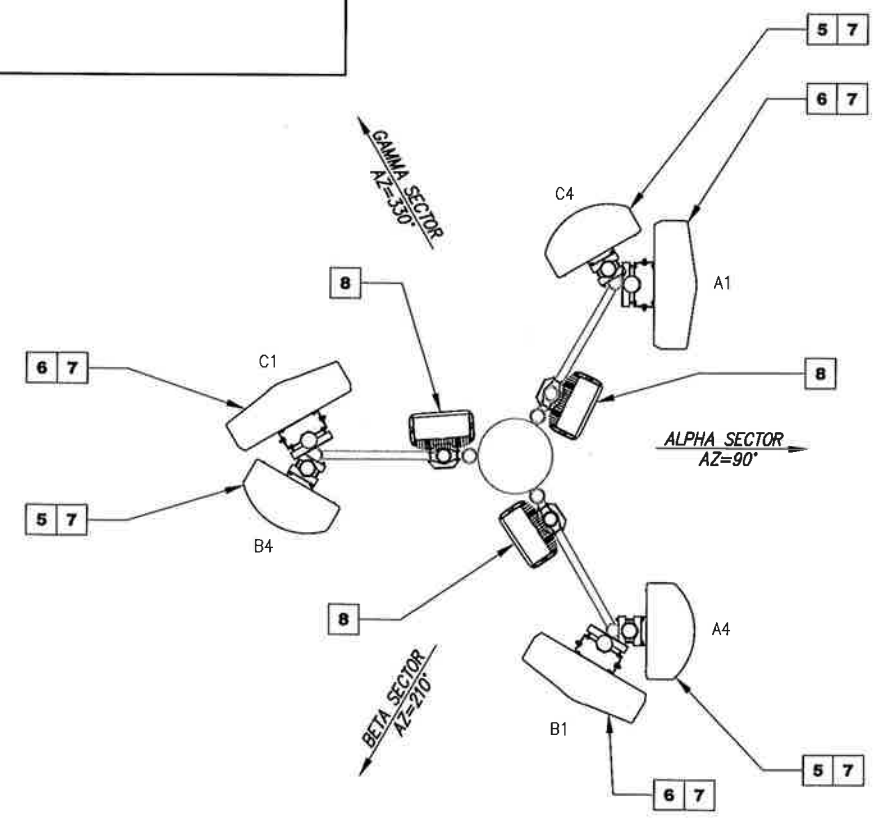

3 PROPOSED ANTENNA ORIENTATION
C2 SCALE: NOT TO SCALE

T-Mobile

T-MOBILE NORTHEAST LLC
103 MONARCH DRIVE
LIVERPOOL, NY 13088

INFINIGY & ENGINEERING, PLLC
1033 WATERVLIET SHAKER RD
ALBANY, NY 12205

STATE OF CONNECTICUT
JOHN S. STEVENS
LICENSED PROFESSIONAL ENGINEER
JAN 31 2019

UNAUTHORIZED ALTERATION OR ADDITION TO THIS DOCUMENT IS A VIOLATION OF APPLICABLE STATE AND/OR LOCAL LAWS

ISSUED FOR CONSTRUCTION	RMS	01/30/19
ISSUED FOR REVIEW	RMS	11/12/18
No	Submital / Revision	App'd Date

Drawn: BMS
Designed: URL
Checked: AD


Project Number: 600-007

Project Title: CT11160B
THOMPSON/I-395
X99 1
720 THOMPSON ROAD
THOMPSON, CT 06277

Prepared For: **CROWN CASTLE**

Drawing Title: **RF CHART**


Drawing Number: **C2**

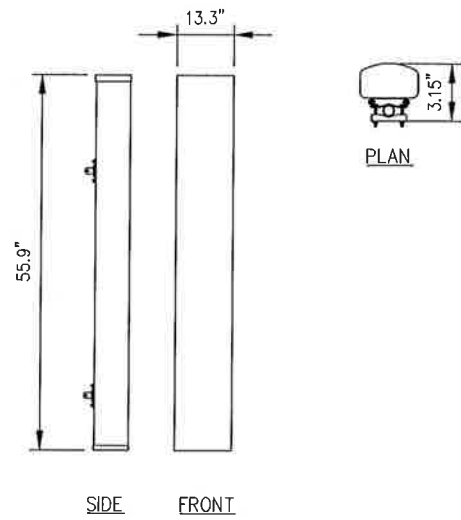

RFS MODEL NO.: **APX16DWV-16DWV-S-E-A20**

RADOME MATERIAL:	FIBERGLASS
RADOME COLOR:	LIGHT GREY
DIMENSIONS, HxWxD:	55.9"x13.3"x3.15"
WEIGHT, W/O MOUNTING KIT:	40.7 LBS


1 ANTENNA DETAIL
D1 SCALE: NOT TO SCALE

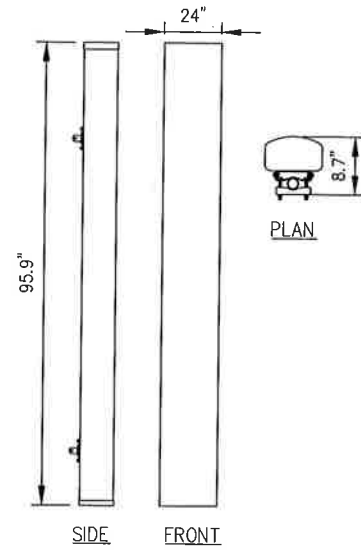

RFS MODEL NO.: **APXVAARR24_43-U-NA20**

RADOME MATERIAL:	FIBERGLASS
RADOME COLOR:	LIGHT GREY
DIMENSIONS, HxWxD:	95.9"x24"x8.7"
WEIGHT, W/O MOUNTING KIT:	128 LBS

2 ANTENNA DETAIL
D1 SCALE: NOT TO SCALE

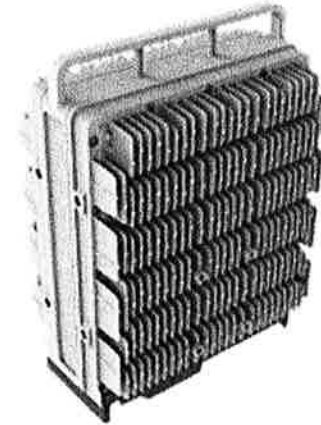

ERICSSON 4449 B71+B12 SPECIFICATIONS

- HxWxD, (INCHES) : 17.91"x13.19"x10.63"
- WEIGHT (LBS) : 74.96
- COLOR : GRAY

3 RRU DETAIL
D1 SCALE: NOT TO SCALE




RFS ATMA4P4DBP-1A20 SPECIFICATIONS

- HxWxD, (INCHES) : 11.2"x8"x4.9"
- WEIGHT (LBS) : 15.85
- COLOR : GRAY

4 TMA DETAIL
D1 SCALE: NOT TO SCALE

PROPOSED 2-7/8" O.D. SCH. 80 GALV. STEEL PIPE (LENGTH AS REQUIRED BY ANTENNA HEIGHT)

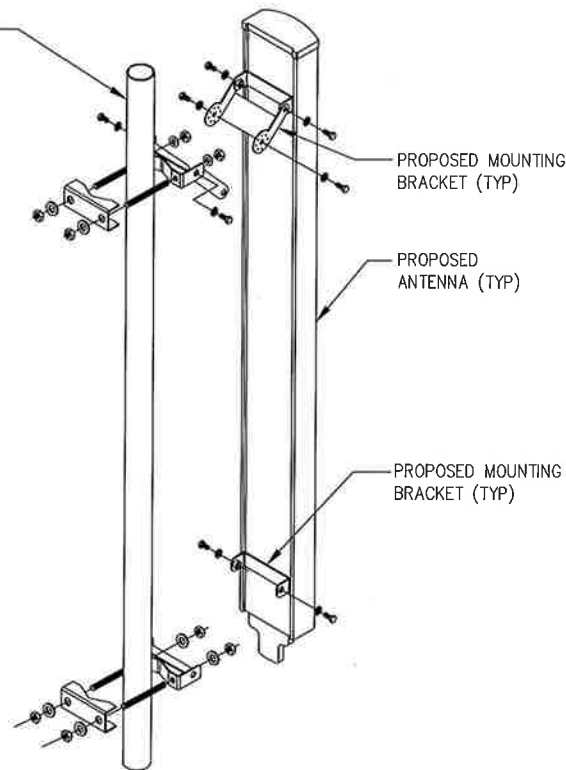

5 ANTENNA MOUNTING DETAIL
D1 SCALE: NOT TO SCALE




UNAUTHORIZED ALTERATION OR ADDITION TO THIS DOCUMENT IS A VIOLATION OF APPLICABLE STATE AND/OR LOCAL LAWS

ISSUED FOR CONSTRUCTION	RMS	01/30/19
ISSUED FOR REVIEW	RMS	11/12/18
No.	Submital / Revision	App'd Date
Drawn:	RMS	
Designed:	MRL	
Checked:	AD	

Project Number: **800-007**

Project Title:
CT11160B
THOMPSON/I-395
X99 1
720 THOMPSON ROAD
THOMPSON, CT 06277




Drawing Title:
EQUIPMENT DETAILS

Drawing Number:
D1


T-Mobile
T-MOBILE NORTHEAST LLC
103 MONARCH DRIVE
LIVERPOOL, NY 13088

INFINIGY & ENGINEERING, PLLC
1033 WATERYLIET SHAKER RD
ALBANY, NY 12205


ALPHA SECTOR
(LAYOUT SHOWN GENERICALLY. SEE ANTENNA ORIENTATION)

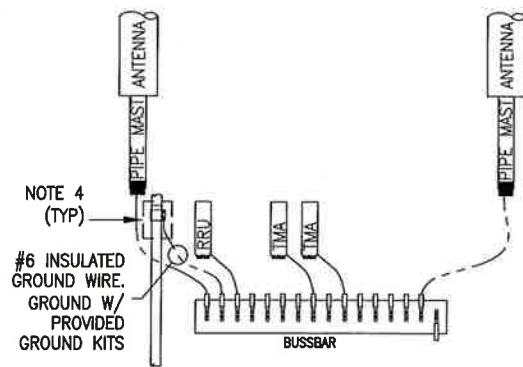

BETA SECTOR
(LAYOUT SHOWN GENERICALLY. SEE ANTENNA ORIENTATION)

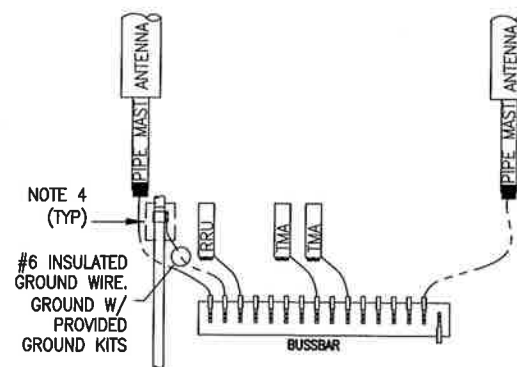

GAMMA SECTOR
(LAYOUT SHOWN GENERICALLY. SEE ANTENNA ORIENTATION)


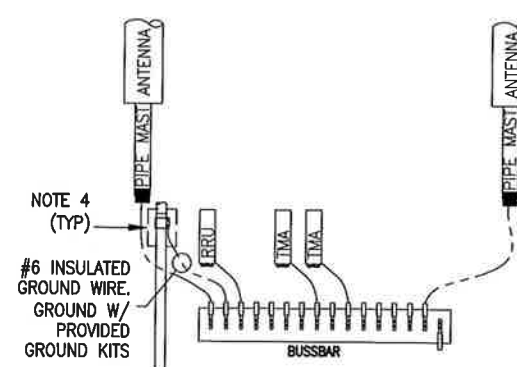


DELTA SECTOR
(LAYOUT SHOWN GENERICALLY. SEE ANTENNA ORIENTATION)

NOTES:


1. PROVIDE #2AWG GROUNDING CONDUCTOR, U.O.N.
2. PROVIDE BONDING AND GROUNDING CONDUCTORS WITH GREEN TYPE THWN INSULATION, U.O.N.
3. PROVIDE SOLID TINNED BARE COPPER WIRE (BCW) GROUNDING CONDUCTOR.
4. PROVIDE STANDARD COAX OR HYBRID CABLE GROUNDING KIT OR FIELD FABRICATE TO SUIT CONDITIONS. TOTAL LENGTH OF GROUNDING CONDUCTOR SHALL NOT EXCEED 10'-0".
5. PROVIDE GROUNDING ELECTRODES QUANTITY, TYPE AND SIZE AS INDICATED ON SITE GROUNDING PLAN.
6. LEAVE GROUND WIRE COILED UP ABOVE GRADE. CAP END OF CONDUIT.
7. ADD COAX OR HYBRID CABLE GROUND KIT CONNECTION TO BUSSBAR WHEN LENGTH OF CABLE TRAY (FROM TOWER OR MONOPOLE TO EQUIPMENT) IS GREATER THAN 20'-0".
8. ADD #2/0 GREEN INSULATED CONDUCTOR BETWEEN CABLE TRAY AND GRIPSTRUT/COVER.
9. BUSSBARS ARE TO BE TINNED COPPER BARS (1/4"x2"x12") MOUNTED ON INSULATORS, U.O.N.
10. GROUND ALL PROPOSED ANTENNAS, DIPLEXERS, TMAS, AND RRUS PER MANU. SPECS.

1 GROUNDING DIAGRAM
E1 SCALE: NOT TO SCALE

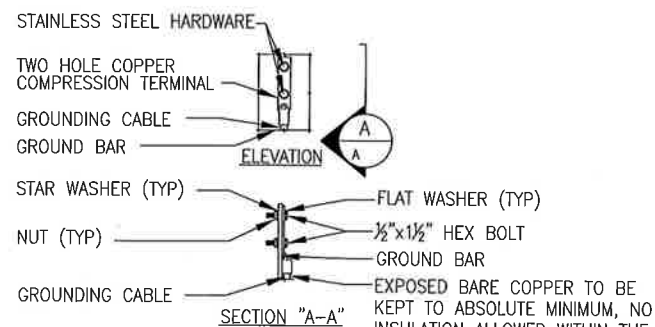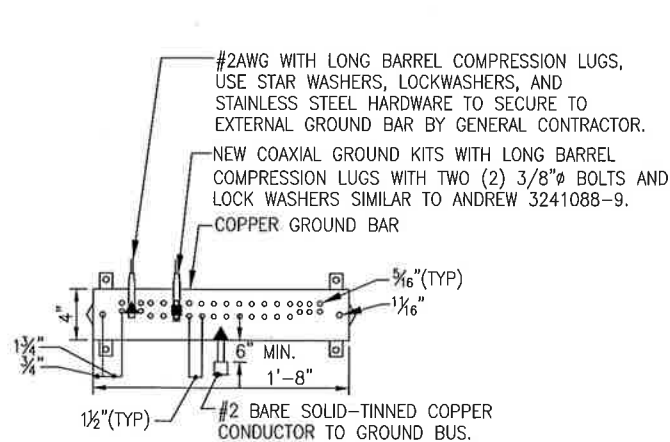

- NOTES:
1. OXIDE INHIBITING COMPOUND TO BE USED AT ALL LOCATIONS.
 1. ALL HARDWARE STAINLESS STEEL COAT ALL SURFACES WITH KOPR-SHIELD BEFORE MATING.
 2. FOR GROUND BOND TO STEEL ONLY: INSERT A TOOTH WASHER BETWEEN LUG AND STEEL, COAT ALL SURFACES WITH KOPR-SHIELD.
 3. ALL HOLES ARE COUNTERSUNK 1/16".

2 GROUND BAR CONNECTION DETAIL
E1 SCALE: NOT TO SCALE

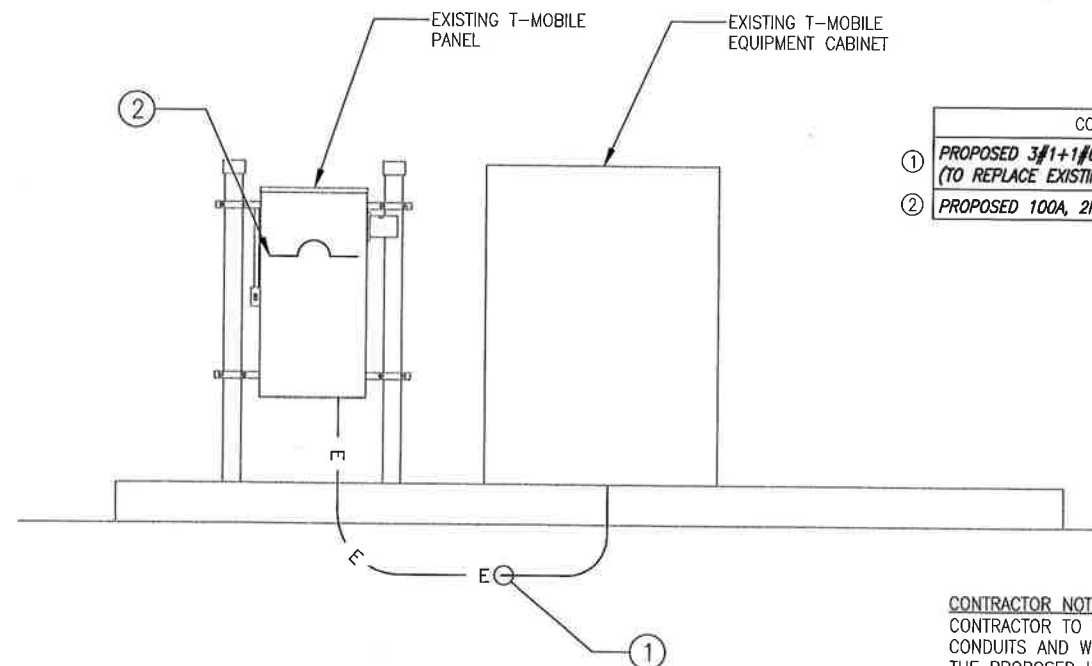

CONDUIT SCHEDULE	
①	PROPOSED 3#1+1#6G IN 1-1/2" CONDUIT (TO REPLACE EXISTING CONDUCTOR AND CONDUIT)
②	PROPOSED 100A, 2P C.B.

CONTRACTOR NOTE:
CONTRACTOR TO VERIFY THAT THE EXISTING CONDUITS AND WIRE SIZES ARE ADEQUATE FOR THE PROPOSED LOADING IN ACCORDANCE WITH NEC AND INCLUDE ELECTRICAL UPGRADES IN THE SCOPE OF WORK AS REQUIRED.

3 ONE LINE DIAGRAM
E1 SCALE: NOT TO SCALE

T-Mobile
T-MOBILE NORTHEAST LLC
103 MONARCH DRIVE
LIVERPOOL, NY 13088

INFINIGY8 ENGINEERING, PLLC
1033 WATERVLIET SHAKER RD
ALBANY, NY 12205




UNAUTHORIZED ALTERATION OR ADDITION TO THIS DOCUMENT IS A VIOLATION OF APPLICABLE STATE AND/OR LOCAL LAWS

No.	Submitted / Revision	App'd	Date
0	ISSUED FOR CONSTRUCTION	RMS	01/30/19
A	ISSUED FOR REVIEW	RMS	11/12/18

Drawn: RMS
Designed: MRL
Checked: AD

Project Number: 600-007

Project Title: **CT11160B THOMPSON/I-395**
X99 1
720 THOMPSON ROAD
THOMPSON, CT 06277



Drawing Title: **GROUNDING & ELECTRICAL DETAILS**

Drawing Number: **E1**

Date: February 10, 2019

Denice Nicholson
Crown Castle
46 Broadway
Albany, NY 12204

Paul J. Ford and Company
250 East Broad st., Suite 600
Columbus, OH 43215
(614) 221-6679

Subject: Structural Analysis Report

Carrier Designation: T-Mobile Co-Locate
Carrier Site Number: CT11160B
Carrier Site Name: Thompson/I-395 X99_1

Crown Castle Designation: Crown Castle BU Number: 828402
Crown Castle Site Name: Thompson/ I-395 X99_1
Crown Castle JDE Job Number: 363294
Crown Castle Work Order Number: 1691996
Crown Castle Order Number: 330748 Rev. 15

Engineering Firm Designation: Paul J. Ford and Company Project Number: 37519-0534.001.7805

Site Data: 720 Thompson Rd, Thompson, Windham County, CT
Latitude 41° 58' 39.74", Longitude -71° 50' 47.55"
156 Foot - Monopole Tower

Dear Denice Nicholson,

Paul J. Ford and Company is pleased to submit this "Structural Analysis Report" to determine the structural integrity of the above mentioned tower.

The purpose of the analysis is to determine acceptability of the tower stress level. Based on our analysis we have determined the tower stress level for the structure and foundation, under the following load case, to be:

LC4.7: Modified Structure w/ Proposed Equipment Configuration **Sufficient Capacity**

This analysis utilizes an ultimate 3-second gust wind speed of 130 mph from the 2018 Connecticut State Building Code per section 1609.3 and Appendix N. Applicable Standards referenced and design criteria are listed in Section 2 – Analysis Criteria.

All modifications and equipment proposed in this report shall be installed in accordance with the referenced proposed drawings for the determined available structural capacity to be effective.

Respectfully submitted by:


Udaykiran Yerra
Structural Designer

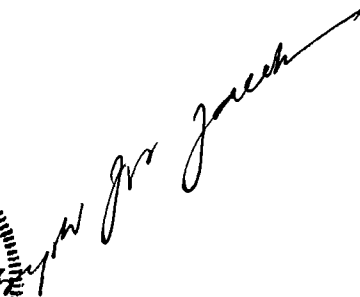



TABLE OF CONTENTS

1) INTRODUCTION

2) ANALYSIS CRITERIA

Table 1 - Proposed Equipment Configuration

Table 2 - Other Considered Equipment

3) ANALYSIS PROCEDURE

Table 3 - Documents Provided

3.1) Analysis Method

3.2) Assumptions

4) ANALYSIS RESULTS

Table 4 - Section Capacity (Summary)

Table 5 – Tower Component Stresses vs. Capacity

4.1) Recommendations

5) APPENDIX A

tnxTower Output

6) APPENDIX B

Base Level Drawing

7) APPENDIX C

Additional Calculations

1) INTRODUCTION

This tower is a 156 ft Monopole tower designed by FRED A. NUDD CORPORATION.

2) ANALYSIS CRITERIA

TIA-222 Revision: TIA-222-H
 Risk Category: II
 Wind Speed: 130 mph
 Exposure Category: C
 Topographic Factor: 1
 Ice Thickness: 1.5 in
 Wind Speed with Ice: 50 mph
 Service Wind Speed: 60 mph

Table 1 - Proposed Equipment Configuration

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
143.0	143.0	3	ericsson	RADIO 4449 B12/B71	12	1 5/8 1 1/4
		3	rfs celwave	APX16DWV-16DWV-S-E-A20 w/ Mount Pipe		
		3	rfs celwave	APXVAA24_43-U-A20 w/ Mount Pipe		
		6	rfs celwave	ATMAA1412D-1A20		
		1	tower mounts	Platform Mount [LP 701-1]		

Table 2 - Other Considered Equipment

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
154.0	154.0	2	andrew	RR90-17-VDPL2 w/ Mount Pipe	4	1 5/8
		2	tower mounts	Pipe Mount [PM 602-1]		
150.0	150.0	3	alcatel lucent	PCS 1900MHZ 4X45W-65MHZ	4	1 1/4
		6	alcatel lucent	RRH2X50-800		
		3	alcatel lucent	TD-RRH8X20-25		
		3	commscope	NNVV-65B-R4		
		3	rfs celwave	APXVTM14-ALU-I20		
		2	tower mounts	Pipe Mount [PM 601-3]		
120.0	120.0	2	decibel	980H120T4E-M w/ Mount Pipe	2	1 5/8
		1	tower mounts	Platform Mount [LP 1201-1]		

3) ANALYSIS PROCEDURE

Table 3 - Documents Provided

Document	Remarks	Reference	Source
4-GEOTECHNICAL REPORTS	FDH, 1424JV1600, 3/25/2014	4726392	CCISITES
4-POST-MODIFICATION INSPECTION	Robert E. Adar, P.E., 10/11/2005	3675131	CCISITES
4-TOWER FOUNDATION DRAWINGS/DESIGN/SPECS	Fred A. Nudd, 98-5979-1, 4/29/1998	3918434	CCISITES
4-TOWER MANUFACTURER MAPPING	FDH, 1424CT1500, 3/21/2014	3508519	CCISITES
4-TOWER REINFORCEMENT DESIGN/DRAWINGS/DATA	APT, CT107593, 5/6/2005	3675126	CCISITES
4-PROPOSED TOWER REINFORCEMENT DESIGN/DRAWINGS/DATA	PJF, 37518-0348.002.7700, 7/25/2018	7744596	CCISITES

3.1) Analysis Method

tnxTower (version 8.0.4.0), a commercially available analysis software package, was used to create a three-dimensional model of the tower and calculate member stresses for various loading cases. Selected output from the analysis is included in Appendix A.

3.2) Assumptions

- 1) Tower and structures were built in accordance with the manufacturer's specifications.
 - 2) The tower and structures have been maintained in accordance with the manufacturer's specification.
 - 3) The configuration of antennas, transmission cables, mounts and other appurtenances are as specified in Tables 1 and 2 and the referenced drawings.
 - 4) The monopole manufacturer drawings did not match the geometry of the FDH tower mapping (CCI Ref# 3508519). We have based our geometry off the FDH tower mapping; we have also assumed the pole shaft and base plate steel yield strength(s) (F_y) as shown in the attached calculations. Anchor rods are assumed to be 2.0" diam, ($F_u = 58$ ksi, $F_y = 42$ ksi).
 - 5) Monopole was modified in conformance with the referenced modification drawings.
 - 6) Monopole will be modified in conformance with the referenced proposed modification drawings.
- This analysis may be affected if any assumptions are not valid or have been made in error. Paul J. Ford and Company should be notified to determine the effect on the structural integrity of the tower.

4) ANALYSIS RESULTS

Table 4 - Section Capacity (Summary)

Section No.	Elevation (ft)	Component Type	Size	Critical Element	% Capacity	Pass / Fail
L1	156 - 151	Pole	TP10.75x10.75x0.365	Pole	3.2%	Pass
L2	151 - 146	Pole	TP10.75x10.75x0.365	Pole	24.9%	Pass
L3	146 - 144.5	Pole	TP10.75x10.75x0.365	Pole	32.0%	Pass
L4	144.5 - 144	Pole	TP18x10.75x0.365	Pole	12.0%	Pass
L5	144 - 139	Pole	TP18.944x18x0.25	Pole	38.5%	Pass
L6	139 - 134	Pole	TP19.887x18.944x0.25	Pole	58.9%	Pass
L7	134 - 129	Pole	TP20.831x19.887x0.25	Pole	76.2%	Pass
L8	129 - 128.25	Pole	TP20.972x20.831x0.25	Pole	78.6%	Pass
L9	128.25 - 128	Pole + Reinf.	TP21.019x20.972x0.575	Pole	35.8%	Pass
L10	128 - 123	Pole + Reinf.	TP21.963x21.019x0.5625	Pole	43.6%	Pass
L11	123 - 118	Pole + Reinf.	TP22.906x21.963x0.55	Pole	51.5%	Pass
L12	118 - 113	Pole + Reinf.	TP23.85x22.906x0.525	Pole	59.7%	Pass
L13	113 - 108	Pole + Reinf.	TP24.793x23.85x0.5125	Pole	67.2%	Pass
L14	108 - 103	Pole + Reinf.	TP25.737x24.793x0.5	Pole	74.2%	Pass
L15	103 - 98	Pole + Reinf.	TP26.68x25.737x0.4938	Pole	80.7%	Pass
L16	98 - 96.5	Pole + Reinf.	TP27.624x26.68x0.4875	Pole	82.5%	Pass
L17	96.5 - 92	Pole + Reinf.	TP27.313x26.464x0.7	Pole	64.9%	Pass
L18	92 - 87	Pole + Reinf.	TP28.257x27.313x0.675	Pole	70.0%	Pass
L19	87 - 82	Pole + Reinf.	TP29.201x28.257x0.65	Pole	75.1%	Pass
L20	82 - 77.5	Pole + Reinf.	TP30.05x29.201x0.6375	Pole	79.6%	Pass
L21	77.5 - 72.5	Pole + Reinf.	TP30.994x30.05x0.6875	Pole	74.0%	Pass
L22	72.5 - 70.58	Pole + Reinf.	TP31.356x30.994x0.6875	Pole	75.3%	Pass
L23	70.58 - 70.33	Pole + Reinf.	TP31.403x31.356x0.6875	Pole	75.4%	Pass
L24	70.33 - 67.08	Pole + Reinf.	TP32.016x31.403x0.675	Pole	77.5%	Pass
L25	67.08 - 66.83	Pole + Reinf.	TP32.063x32.016x0.975	Pole	55.6%	Pass
L26	66.83 - 61.83	Pole + Reinf.	TP33.007x32.063x0.95	Pole	58.1%	Pass
L27	61.83 - 61.75	Pole + Reinf.	TP33.824x33.007x0.95	Pole	58.1%	Pass
L28	61.75 - 56.75	Pole + Reinf.	TP33.341x32.397x0.9375	Pole	62.1%	Pass
L29	56.75 - 51.75	Pole + Reinf.	TP34.284x33.341x0.9125	Pole	64.4%	Pass
L30	51.75 - 46.75	Pole + Reinf.	TP35.228x34.284x0.9	Pole	67.2%	Pass
L31	46.75 - 41.75	Pole + Reinf.	TP36.171x35.228x0.8875	Pole	70.0%	Pass
L32	41.75 - 39.8	Pole + Reinf.	TP36.539x36.171x0.875	Pole	71.1%	Pass
L33	39.8 - 39.33	Pole + Reinf.	TP36.628x36.539x0.95	Pole	65.2%	Pass
L34	39.33 - 39.08	Pole + Reinf.	TP36.675x36.628x0.9375	Pole	65.3%	Pass
L35	39.08 - 38.33	Pole + Reinf.	TP36.816x36.675x0.9375	Pole	65.6%	Pass
L36	38.33 - 38.08	Pole + Reinf.	TP36.864x36.816x0.8875	Pole	70.8%	Pass
L37	38.08 - 33.08	Pole + Reinf.	TP37.807x36.864x0.875	Pole	72.7%	Pass
L38	33.08 - 30.75	Pole + Reinf.	TP38.247x37.807x0.8625	Pole	73.6%	Pass
L39	30.75 - 30.5	Pole + Reinf.	TP38.294x38.247x0.9375	Pole	68.0%	Pass
L40	30.5 - 25.5	Pole + Reinf.	TP39.238x38.294x0.925	Pole	69.8%	Pass
L41	25.5 - 20.5	Pole + Reinf.	TP40.182x39.238x0.9	Pole	71.5%	Pass

Section No.	Elevation (ft)	Component Type	Size	Critical Element	% Capacity	Pass / Fail
L42	20.5 - 15.5	Pole + Reinf.	TP41.125x40.182x0.8875	Pole	73.1%	Pass
L43	15.5 - 15.05	Pole + Reinf.	TP42.201x41.125x0.8875	Pole	73.3%	Pass
L44	15.05 - 8.8	Pole + Reinf.	TP41.639x40.46x0.875	Pole	77.4%	Pass
L45	8.8 - 8.25	Pole + Reinf.	TP41.743x41.639x0.875	Pole	77.6%	Pass
L46	8.25 - 8	Pole + Reinf.	TP41.79x41.743x0.875	Pole	78.3%	Pass
L47	8 - 4.25	Pole + Reinf.	TP42.498x41.79x0.875	Pole	79.8%	Pass
L48	4.25 - 4	Pole + Reinf.	TP42.545x42.498x1.05	Pole	66.8%	Pass
L49	4 - 3	Pole + Reinf.	TP42.734x42.545x1.05	Pole	67.2%	Pass
L50	3 - 2.75	Pole + Reinf.	TP42.781x42.734x1.15	Pole	62.2%	Pass
L51	2.75 - 0	Pole + Reinf.	TP43.3x42.781x1.125	Pole	63.2%	Pass
					Summary	
				Pole	82.5%	Pass
				Reinforcement	71.2%	Pass
				Overall	82.5%	Pass

Table 5 - Tower Component Stresses vs. Capacity

Notes	Component	Elevation (ft)	% Capacity	Pass / Fail
1	Anchor Rods	0	89.9	Pass
1	Base Plate	0	89.6	Pass
1	Base Foundation Steel	0	91.9	Pass
1	Base Foundation Soil Interaction	0	28.8	Pass
1	Flange Connection	144	9.8	Pass

Structure Rating (max from all components) =	91.9%
---	--------------

Notes:

- 1) See additional documentation in "Appendix C – Additional Calculations" for calculations supporting the % capacity consumed. All structural rating are per TIA-222-H, Section 15.5.

4.1) Recommendations

The monopole and its foundation will have sufficient capacity to carry the proposed loading configuration once the proposed modifications are installed.

- Install the proposed modifications per the referenced proposed drawings.

APPENDIX A
TNXTOWER OUTPUT

Tower Input Data

The tower is a monopole.
 This tower is designed using the TIA-222-H standard.
 The following design criteria apply:
 Tower is located in Windham County, Connecticut.
 Tower base elevation above sea level: 622.0000 ft.
 Basic wind speed of 130 mph.
 Risk Category II.
 Exposure Category C.
 Simplified Topographic Factor Procedure for wind speed-up calculations is used.
 Topographic Category: 1.
 Crest Height 0.0000 ft.
 Nominal ice thickness of 1.2750 in.
 Ice thickness is considered to increase with height.
 Ice density of 56.00 pcf.
 A wind speed of 50 mph is used in combination with ice.
 Temperature drop of 50 °F.
 Deflections calculated using a wind speed of 60 mph.
 TIA-222-H Annex S.
 A non-linear (P-delta) analysis was used.
 Pressures are calculated at each section.
 Stress ratio used in pole design is 1.05.
 Local bending stresses due to climbing loads, feed line supports, and appurtenance mounts are not considered.

Options

- | | | |
|--|---|---|
| Consider Moments - Legs
Consider Moments - Horizontals
Consider Moments - Diagonals
Use Moment Magnification
Use Code Stress Ratios
Use Code Safety Factors - Guys
Escalate Ice
Always Use Max Kz
Use Special Wind Profile

Include Bolts In Member Capacity

Leg Bolts Are At Top Of Section
Secondary Horizontal Braces Leg
Use Diamond Inner Bracing (4 Sided)
SR Members Have Cut Ends
SR Members Are Concentric | Distribute Leg Loads As Uniform
Assume Legs Pinned
✓ Assume Rigid Index Plate
✓ Use Clear Spans For Wind Area
Use Clear Spans For KL/r
Retension Guys To Initial Tension
✓ Bypass Mast Stability Checks
✓ Use Azimuth Dish Coefficients
✓ Project Wind Area of Appurt.

Autocalc Torque Arm Areas

Add IBC .6D+W Combination
Sort Capacity Reports By Component
Triangulate Diamond Inner Bracing
Treat Feed Line Bundles As Cylinder
Ignore KL/ry For 60 Deg. Angle Legs | Use ASCE 10 X-Brace Ly Rules
Calculate Redundant Bracing Forces
Ignore Redundant Members in FEA
SR Leg Bolts Resist Compression
All Leg Panels Have Same Allowable
Offset Girt At Foundation
✓ Consider Feed Line Torque
Include Angle Block Shear Check
Use TIA-222-H Bracing Resist.
Exemption
Use TIA-222-H Tension Splice
Exemption

<div style="background-color: #e0e0e0; text-align: center; padding: 2px;">Poles</div> ✓ Include Shear-Torsion Interaction
Always Use Sub-Critical Flow
Use Top Mounted Sockets
Pole Without Linear Attachments
Pole With Shroud Or No
Appurtenances
Outside and Inside Corner Radii Are
Known |
|--|---|---|

Tapered Pole Section Geometry

Section	Elevation	Section Length	Splice Length	Number of Sides	Top Diameter	Bottom Diameter	Wall Thickness	Bend Radius	Pole Grade
	ft	ft	ft		in	in	in	in	
L1	156.0000-	5.0000	0.00	Round	10.7500	10.7500	0.3650		A53-B-35

Section	Elevation ft	Section Length ft	Splice Length ft	Number of Sides	Top Diameter in	Bottom Diameter in	Wall Thickness in	Bend Radius in	Pole Grade
	151.0000								(35 ksi)
L2	151.0000- 146.0000	5.0000	0.00	Round	10.7500	10.7500	0.3650		A53-B-35 (35 ksi)
L3	146.0000- 144.5000	1.5000	0.00	Round	10.7500	10.7500	0.3650		A53-B-35 (35 ksi)
L4	144.5000- 144.0000	0.5000	0.00	Round	10.7500	18.0000	0.3650		A53-B-35 (35 ksi)
L5	144.0000- 139.0000	5.0000	0.00	12	18.0000	18.9435	0.2500	1.0000	A36 (36 ksi)
L6	139.0000- 134.0000	5.0000	0.00	12	18.9435	19.8871	0.2500	1.0000	A36 (36 ksi)
L7	134.0000- 129.0000	5.0000	0.00	12	19.8871	20.8306	0.2500	1.0000	A36 (36 ksi)
L8	129.0000- 128.2500	0.7500	0.00	12	20.8306	20.9721	0.2500	1.0000	A36 (36 ksi)
L9	128.2500- 128.0000	0.2500	0.00	12	20.9721	21.0193	0.5750	2.3000	A36 (36 ksi)
L10	128.0000- 123.0000	5.0000	0.00	12	21.0193	21.9628	0.5625	2.2500	A36 (36 ksi)
L11	123.0000- 118.0000	5.0000	0.00	12	21.9628	22.9064	0.5500	2.2000	A36 (36 ksi)
L12	118.0000- 113.0000	5.0000	0.00	12	22.9064	23.8499	0.5250	2.1000	A36 (36 ksi)
L13	113.0000- 108.0000	5.0000	0.00	12	23.8499	24.7934	0.5125	2.0500	A36 (36 ksi)
L14	108.0000- 103.0000	5.0000	0.00	12	24.7934	25.7369	0.5000	2.0000	A36 (36 ksi)
L15	103.0000- 98.0000	5.0000	0.00	12	25.7369	26.6805	0.4938	1.9750	A36 (36 ksi)
L16	98.0000- 93.0000	5.0000	3.50	12	26.6805	27.6240	0.4875	1.9500	A36 (36 ksi)
L17	93.0000- 92.0000	4.5000	0.00	12	26.4635	27.3130	0.7000	2.8000	A36 (36 ksi)
L18	92.0000- 87.0000	5.0000	0.00	12	27.3130	28.2568	0.6750	2.7000	A36 (36 ksi)
L19	87.0000- 82.0000	5.0000	0.00	12	28.2568	29.2006	0.6500	2.6000	A36 (36 ksi)
L20	82.0000- 77.5000	4.5000	0.00	12	29.2006	30.0500	0.6375	2.5500	A36 (36 ksi)
L21	77.5000- 72.5000	5.0000	0.00	12	30.0500	30.9935	0.6875	2.7500	A36 (36 ksi)
L22	72.5000- 70.5800	1.9200	0.00	12	30.9935	31.3558	0.6875	2.7500	A36 (36 ksi)
L23	70.5800- 70.3300	0.2500	0.00	12	31.3558	31.4030	0.6875	2.7500	A36 (36 ksi)
L24	70.3300- 67.0800	3.2500	0.00	12	31.4030	32.0163	0.6750	2.7000	A36 (36 ksi)
L25	67.0800- 66.8300	0.2500	0.00	12	32.0163	32.0634	0.9750	3.9000	A36 (36 ksi)
L26	66.8300- 61.8300	5.0000	0.00	12	32.0634	33.0069	0.9500	3.8000	A36 (36 ksi)
L27	61.8300- 57.5000	4.3300	4.25	12	33.0069	33.8240	0.9500	3.8000	A36 (36 ksi)
L28	57.5000- 56.7500	5.0000	0.00	12	32.3970	33.3405	0.9375	3.7500	A36 (36 ksi)
L29	56.7500- 51.7500	5.0000	0.00	12	33.3405	34.2840	0.9125	3.6500	A36 (36 ksi)
L30	51.7500- 46.7500	5.0000	0.00	12	34.2840	35.2275	0.9000	3.6000	A36 (36 ksi)
L31	46.7500- 41.7500	5.0000	0.00	12	35.2275	36.1710	0.8875	3.5500	A36 (36 ksi)
L32	41.7500- 39.8000	1.9500	0.00	12	36.1710	36.5390	0.8750	3.5000	A36 (36 ksi)
L33	39.8000- 39.3300	0.4700	0.00	12	36.5390	36.6277	0.9500	3.8000	A36 (36 ksi)

Section	Elevation ft	Section Length ft	Splice Length ft	Number of Sides	Top Diameter in	Bottom Diameter in	Wall Thickness in	Bend Radius in	Pole Grade
L34	39.3300-39.0800	0.2500	0.00	12	36.6277	36.6749	0.9375	3.7500	A36 (36 ksi)
L35	39.0800-38.3300	0.7500	0.00	12	36.6749	36.8164	0.9375	3.7500	A36 (36 ksi)
L36	38.3300-38.0800	0.2500	0.00	12	36.8164	36.8636	0.8875	3.5500	A36 (36 ksi)
L37	38.0800-33.0800	5.0000	0.00	12	36.8636	37.8073	0.8750	3.5000	A36 (36 ksi)
L38	33.0800-30.7500	2.3300	0.00	12	37.8073	38.2470	0.8625	3.4500	A36 (36 ksi)
L39	30.7500-30.5000	0.2500	0.00	12	38.2470	38.2942	0.9375	3.7500	A36 (36 ksi)
L40	30.5000-25.5000	5.0000	0.00	12	38.2942	39.2379	0.9250	3.7000	A36 (36 ksi)
L41	25.5000-20.5000	5.0000	0.00	12	39.2379	40.1816	0.9000	3.6000	A36 (36 ksi)
L42	20.5000-15.5000	5.0000	0.00	12	40.1816	41.1252	0.8875	3.5500	A36 (36 ksi)
L43	15.5000-9.8000	5.7000	5.25	12	41.1252	42.2010	0.8875	3.5500	A36 (36 ksi)
L44	9.8000-8.8000	6.2500	0.00	12	40.4601	41.6395	0.8750	3.5000	A36 (36 ksi)
L45	8.8000-8.2500	0.5500	0.00	12	41.6395	41.7433	0.8750	3.5000	A36 (36 ksi)
L46	8.2500-8.0000	0.2500	0.00	12	41.7433	41.7904	0.8750	3.5000	A36 (36 ksi)
L47	8.0000-4.2500	3.7500	0.00	12	41.7904	42.4980	0.8750	3.5000	A36 (36 ksi)
L48	4.2500-4.0000	0.2500	0.00	12	42.4980	42.5452	1.0500	4.2000	A36 (36 ksi)
L49	4.0000-3.0000	1.0000	0.00	12	42.5452	42.7339	1.0500	4.2000	A36 (36 ksi)
L50	3.0000-2.7500	0.2500	0.00	12	42.7339	42.7811	1.1500	4.6000	A36 (36 ksi)
L51	2.7500-0.0000	2.7500		12	42.7811	43.3000	1.1250	4.5000	A36 (36 ksi)

Tapered Pole Properties

Section	Tip Dia. in	Area in ²	I in ⁴	r in	C in	I/C in ³	J in ⁴	It/Q in ²	w in	w/t
L1	10.7500	11.9083	160.7342	3.6739	5.3750	29.9040	321.4685	5.9506	0.0000	0
	10.7500	11.9083	160.7342	3.6739	5.3750	29.9040	321.4685	5.9506	0.0000	0
L2	10.7500	11.9083	160.7342	3.6739	5.3750	29.9040	321.4685	5.9506	0.0000	0
	10.7500	11.9083	160.7342	3.6739	5.3750	29.9040	321.4685	5.9506	0.0000	0
L3	10.7500	11.9083	160.7342	3.6739	5.3750	29.9040	321.4685	5.9506	0.0000	0
	10.7500	11.9083	160.7342	3.6739	5.3750	29.9040	321.4685	5.9506	0.0000	0
L4	10.7500	11.9083	160.7342	3.6739	5.3750	29.9040	321.4685	5.9506	0.0000	0
	18.0000	20.2217	786.4392	6.2362	9.0000	87.3821	1572.8784	10.1048	0.0000	0
L5	18.5468	14.2888	574.6149	6.3545	9.3240	61.6275	1164.3256	7.0325	4.1540	16.616
	19.5236	15.0483	671.2058	6.6923	9.8127	68.4014	1360.0450	7.4063	4.4069	17.627
L6	19.5236	15.0483	671.2058	6.6923	9.8127	68.4014	1360.0450	7.4063	4.4069	17.627
	20.5004	15.8078	778.0566	7.0301	10.3015	75.5285	1576.5535	7.7801	4.6597	18.639
L7	20.5004	15.8078	778.0566	7.0301	10.3015	75.5285	1576.5535	7.7801	4.6597	18.639
	21.4772	16.5674	895.6847	7.3679	10.7902	83.0088	1814.9001	8.1540	4.9126	19.65
L8	21.4772	16.5674	895.6847	7.3679	10.7902	83.0088	1814.9001	8.1540	4.9126	19.65
	21.6237	16.6813	914.2906	7.4185	10.8636	84.1613	1852.6006	8.2100	4.9505	19.802
L9	21.5091	37.7653	2005.4696	7.3022	10.8636	184.6052	4063.6252	18.5869	4.0795	7.095
	21.5579	37.8526	2019.4171	7.3191	10.8880	185.4719	4091.8864	18.6299	4.0922	7.117
L10	21.5623	37.0524	1979.1425	7.3235	10.8880	181.7729	4010.2793	18.2360	4.1257	7.335
	22.5392	38.7613	2265.8199	7.6613	11.3767	199.1624	4591.1655	19.0772	4.3785	7.784

Section	Tip Dia. in	Area in ²	I in ⁴	r in	C in	I/C in ³	J in ⁴	It/Q in ²	w in	w/t
L11	22.5436	37.9221	2219.3528	7.6658	11.3767	195.0781	4497.0106	18.6641	4.4120	8.022
	23.5204	39.5931	2525.8490	8.0036	11.8655	212.8735	5118.0549	19.4865	4.6649	8.482
L12	23.5292	37.8357	2419.1352	8.0125	11.8655	203.8799	4901.8237	18.6216	4.7319	9.013
	24.5060	39.4307	2738.1642	8.3503	12.3542	221.6376	5548.2631	19.4066	4.9848	9.495
L13	24.5104	38.5125	2677.2695	8.3548	12.3542	216.7086	5424.8739	18.9547	5.0183	9.792
	25.4872	40.0696	3015.3010	8.6926	12.8430	234.7819	6109.8174	19.7210	5.2711	10.285
L14	25.4916	39.1124	2946.3028	8.6970	12.8430	229.4095	5970.0082	19.2499	5.3046	10.609
	26.4685	40.6315	3303.1018	9.0348	13.3317	247.7623	6692.9798	19.9976	5.5575	11.115
L15	26.4707	40.1335	3264.2371	9.0371	13.3317	244.8471	6614.2293	19.7525	5.5743	11.29
	27.4475	41.6336	3644.1168	9.3748	13.8205	263.6751	7383.9687	20.4908	5.8271	11.802
L16	27.4497	41.1164	3600.5656	9.3771	13.8205	260.5238	7295.7221	20.2362	5.8439	11.987
	28.4265	42.5975	4003.8513	9.7149	14.3092	279.8090	8112.8882	20.9652	6.0967	12.506
L17	27.8341	58.0710	4919.8959	9.2233	13.7081	358.9041	9969.0430	28.5808	5.2162	7.452
	28.0295	59.9856	5422.7459	9.5274	14.1481	383.2841	10987.953	29.5231	5.4439	7.777
L18	28.0383	57.8976	5243.8268	9.5364	14.1481	370.6379	10625.414	28.4954	5.5109	8.164
	29.0154	59.9490	5821.1898	9.8743	14.6370	397.7036	11795.308	29.5051	5.7638	8.539
L19	29.0243	57.7810	5620.8466	9.8832	14.6370	384.0162	11389.359	28.4380	5.8308	8.97
	30.0014	59.7563	6217.2691	10.2211	15.1259	411.0347	12597.872	29.4103	6.0838	9.36
L20	30.0058	58.6328	6105.7188	10.2256	15.1259	403.6600	12371.841	28.8573	6.1173	9.596
	30.8852	60.3765	6666.8062	10.5297	15.5659	428.2956	13508.756	29.7155	6.3449	9.953
L21	30.8675	65.0012	7153.0888	10.5118	15.5659	459.5358	14494.097	31.9916	6.2109	9.034
	31.8443	67.0899	7865.0300	10.8495	16.0546	489.8916	15936.683	33.0196	6.4638	9.402
L22	31.8443	67.0899	7865.0300	10.8495	16.0546	489.8916	15936.683	33.0196	6.4638	9.402
	32.2194	67.8920	8150.4916	10.9793	16.2423	501.8063	16515.105	33.4144	6.5609	9.543
L23	32.2194	67.8920	8150.4916	10.9793	16.2423	501.8063	16515.105	33.4144	6.5609	9.543
	32.2682	67.9964	8188.1615	10.9961	16.2667	503.3682	16591.435	33.4658	6.5735	9.561
L24	32.2726	66.7873	8049.1049	11.0006	16.2667	494.8197	16309.668	32.8707	6.6070	9.788
	32.9076	68.1202	8540.7243	11.2202	16.5844	514.9848	17305.822	33.5267	6.7714	10.032
L25	32.8017	97.4540	11985.722	11.1128	16.5844	722.7098	24286.322	47.9639	5.9674	6.12
	32.8506	97.6021	12040.451	11.1297	16.6089	724.9416	24397.218	48.0368	5.9800	6.133
L26	32.8594	95.1760	11760.047	11.1386	16.6089	708.0588	23829.043	46.8427	6.0470	6.365
	33.8362	98.0621	12862.671	11.4764	17.0976	752.3091	26063.259	48.2632	6.2999	6.631
L27	33.8362	98.0621	12862.671	11.4764	17.0976	752.3091	26063.259	48.2632	6.2999	6.631
	34.6821	100.5616	13871.488	11.7689	17.5208	791.7141	28107.397	49.4933	6.5188	6.862
L28	34.0394	94.9684	11996.915	11.2625	16.7817	714.8825	24309.002	46.7406	6.1699	6.581
	34.1859	97.8166	13109.008	11.6003	17.2704	759.0452	26562.405	48.1424	6.4228	6.851
L29	34.1948	95.2817	12788.990	11.6092	17.2704	740.5153	25913.962	46.8947	6.4898	7.112
	35.1715	98.0539	13938.083	11.9470	17.7591	784.8405	28242.335	48.2591	6.7426	7.389
L30	35.1760	96.7469	13762.604	11.9515	17.7591	774.9595	27886.767	47.6159	6.7761	7.529
	36.1527	99.4812	14962.772	12.2893	18.2479	819.9740	30318.633	48.9616	7.0290	7.81

Section	Tip Dia. in	Area in ²	I in ⁴	r in	C in	I/C in ³	J in ⁴	It/Q in ²	w in	w/t
L31	36.1571	98.1352	14771.080 5	12.2937	18.2479	809.4691	29930.214 7	48.2992	7.0625	7.958
	37.1339	100.8315	16022.357 7	12.6315	18.7366	855.1371	32465.640 1	49.6262	7.3153	8.243
L32	37.1383	99.4466	15813.485 4	12.6360	18.7366	843.9893	32042.408 1	48.9446	7.3488	8.399
	37.5193	100.4833	16313.232 4	12.7677	18.9272	861.8935	33055.032 7	49.4548	7.4475	8.511
L33	37.4928	108.8668	17600.004 6	12.7409	18.9272	929.8788	35662.381 0	53.5809	7.2465	7.628
	37.5847	109.1381	17731.936 6	12.7726	18.9732	934.5804	35929.709 0	53.7145	7.2702	7.653
L34	37.5891	107.7398	17517.020 1	12.7771	18.9732	923.2531	35494.231 9	53.0263	7.3037	7.791
	37.6379	107.8822	17586.585 0	12.7940	18.9976	925.7271	35635.189 6	53.0964	7.3164	7.804
L35	37.6379	107.8822	17586.585 2	12.7940	18.9976	925.7271	35635.189 6	53.0964	7.3164	7.804
	37.7845	108.3095	17796.386 8	12.8447	19.0709	933.1690	36060.304 6	53.3067	7.3543	7.845
L36	37.8021	102.6759	16917.778 1	12.8626	19.0709	887.0984	34280.005 1	50.5340	7.4883	8.438
	37.8510	102.8108	16984.516 5	12.8795	19.0954	889.4580	34415.235 2	50.6003	7.5010	8.452
L37	37.8554	101.3979	16762.758 7	12.8839	19.0954	877.8448	33965.893 7	49.9050	7.5345	8.611
	38.8323	104.0567	18116.258 8	13.2218	19.5842	925.0458	36708.451 8	51.2136	7.7874	8.9
L38	38.8367	102.6049	17875.593 2	13.2262	19.5842	912.7570	36220.798 1	50.4990	7.8209	9.068
	39.2920	103.8262	18521.533 6	13.3837	19.8120	934.8661	37529.648 6	51.1001	7.9387	9.204
L39	39.2655	112.6282	20011.179 0	13.3568	19.8120	1010.0552	40548.074 0	55.4322	7.7377	8.254
	39.3144	112.7706	20087.195 7	13.3737	19.8364	1012.6429	40702.104 3	55.5023	7.7504	8.267
L40	39.3188	111.3042	19839.268 4	13.3782	19.8364	1000.1443	40199.736 5	54.7806	7.7839	8.415
	40.2957	114.1149	21380.516 4	13.7160	20.3252	1051.9203	43322.722 8	56.1639	8.0368	8.688
L41	40.3046	111.1032	20843.413 8	13.7250	20.3252	1025.4948	42234.407 3	54.6816	8.1038	9.004
	41.2815	113.8379	22420.757 4	14.0628	20.8140	1077.1937	45430.533 0	56.0276	8.3567	9.285
L42	41.2859	112.2926	22130.471 3	14.0673	20.8140	1063.2470	44842.334 8	55.2670	8.3902	9.454
	42.2629	114.9893	23763.492 9	14.4051	21.3029	1115.5070	48151.279 2	56.5943	8.6431	9.739
L43	42.2629	114.9893	23763.492 9	14.4051	21.3029	1115.5070	48151.279 2	56.5943	8.6431	9.739
	43.3766	118.0637	25720.899 4	14.7902	21.8601	1176.6130	52117.515 5	58.1073	8.9314	10.064
L44	42.6044	111.5312	22307.287 3	14.1715	20.9584	1064.3624	45200.611 8	54.8922	8.4983	9.712
	42.7997	114.8540	24361.045 0	14.5937	21.5693	1129.4337	49362.081 9	56.5276	8.8144	10.074
L45	42.7997	114.8540	24361.045 0	14.5937	21.5693	1129.4337	49362.081 9	56.5276	8.8144	10.074
	42.9071	115.1464	24547.580 9	14.6308	21.6230	1135.2525	49740.054 1	56.6715	8.8422	10.105
L46	42.9071	115.1464	24547.580 9	14.6308	21.6230	1135.2525	49740.054 1	56.6715	8.8422	10.105
	42.9560	115.2793	24632.682 7	14.6477	21.6475	1137.9023	49912.493 3	56.7369	8.8548	10.12
L47	42.9560	115.2793	24632.682	14.6477	21.6475	1137.9023	49912.493	56.7369	8.8548	10.12

Section	Tip Dia. in	Area in ²	I in ⁴	r in	C in	I/C in ³	J in ⁴	It/Q in ²	w in	w/t
	43.6886	117.2729	25932.927 7	14.9011	22.0140	1178.0204	52547.141 3	57.7182	9.0445	10.337
L48	43.6268	140.1359	30728.644 5	14.8384	22.0140	1395.8689	62264.564 9	68.9706	8.5755	8.167
	43.6757	140.2953	30833.684 2	14.8553	22.0384	1399.0875	62477.405 1	69.0491	8.5881	8.179
L49	43.6757	140.2953	30833.684 9	14.8553	22.0384	1399.0875	62477.405 0	69.0491	8.5881	8.179
	43.8710	140.9333	31256.236 8	14.9228	22.1362	1411.9985	63333.609 7	69.3631	8.6387	8.227
L50	43.8357	153.9852	33987.236 1	14.8870	22.1362	1535.3712	68867.354 7	75.7869	8.3707	7.279
	43.8846	154.1599	34103.035 7	14.9039	22.1606	1538.9036	69101.996 0	75.8728	8.3833	7.29
L51	43.8934	150.8992	33421.803 7	14.9129	22.1606	1508.1630	67721.635 5	74.2680	8.4503	7.511
	44.4306	152.7789	34686.431 2	15.0986	22.4294	1546.4716	70284.113 5	75.1931	8.5894	7.635

Tower Elevation	Gusset Area (per face)	Gusset Thickness	Gusset Grade	Adjust. Factor A _r	Adjust. Factor A _r	Weight Mult.	Double Angle Stitch Bolt Spacing Diagonals	Double Angle Stitch Bolt Spacing Horizontals	Double Angle Stitch Bolt Spacing Redundants
ft	ft ²	in					in	in	in
L1 156.0000- 151.0000				1	1	1			
L2 151.0000- 146.0000				1	1	1			
L3 146.0000- 144.5000				1	1	1			
L4 144.5000- 144.0000				1	1	1			
L5 144.0000- 139.0000				1	1	1			
L6 139.0000- 134.0000				1	1	1			
L7 134.0000- 129.0000				1	1	1			
L8 129.0000- 128.2500				1	1	1			
L9 128.2500- 128.0000				1	1	0.917905			
L10 128.0000- 123.0000				1	1	0.915981			
L11 123.0000- 118.0000				1	1	0.915921			
L12 118.0000- 113.0000				1	1	0.938956			
L13 113.0000- 108.0000				1	1	0.942941			
L14 108.0000- 103.0000				1	1	0.948594			
L15 103.0000- 98.0000				1	1	0.944005			
L16 98.0000- 93.0000				1	1	0.951143			
L17 93.0000- 92.0000				1	1	0.895321			

Tower Elevation	Gusset Area (per face)	Gusset Thickness	Gusset Grade	Adjust. Factor A_r	Adjust. Factor A_r	Weight Mult.	Double Angle Stitch Bolt Spacing Diagonals in	Double Angle Stitch Bolt Spacing Horizontal in	Double Angle Stitch Bolt Spacing Redundants in
ft	ft ²	in							
L18 92.0000-87.0000				1	1	0.908542			
L19 87.0000-82.0000				1	1	0.924185			
L20 82.0000-77.5000				1	1	0.926017			
L21 77.5000-72.5000				1	1	0.93596			
L22 72.5000-70.5800				1	1	0.930273			
L23 70.5800-70.3300				1	1	0.929542			
L24 70.3300-67.0800				1	1	0.936911			
L25 67.0800-66.8300				1	1	0.904489			
L26 66.8300-61.8300				1	1	0.909927			
L27 61.8300-57.5000				1	1	0.909654			
L28 57.5000-56.7500				1	1	0.915643			
L29 56.7500-51.7500				1	1	0.92311			
L30 51.7500-46.7500				1	1	0.919409			
L31 46.7500-41.7500				1	1	0.916512			
L32 41.7500-39.8000				1	1	0.923373			
L33 39.8000-39.3300				1	1	0.91724			
L34 39.3300-39.0800				1	1	0.928445			
L35 39.0800-38.3300				1	1	0.92636			
L36 38.3300-38.0800				1	1	0.952109			
L37 38.0800-33.0800				1	1	0.951659			
L38 33.0800-30.7500				1	1	0.958886			
L39 30.7500-30.5000				1	1	0.94994			
L40 30.5000-25.5000				1	1	0.948734			
L41 25.5000-20.5000				1	1	0.961052			
L42 20.5000-15.5000				1	1	0.961339			
L43 15.5000-9.8000				1	1	0.960204			
L44 9.8000-8.8000				1	1	0.967879			
L45 8.8000-8.2500				1	1	0.966509			
L46 8.2500-8.0000				1	1	1.03647			
L47 8.0000-4.2500				1	1	1.02614			
L48 4.2500-4.0000				1	1	0.938457			
L49 4.0000-				1	1	0.935825			

Tower Elevation	Gusset Area (per face)	Gusset Thickness	Gusset Grade	Adjust. Factor A_r	Adjust. Factor A_r	Weight Mult.	Double Angle Stitch Bolt Spacing Diagonals	Double Angle Stitch Bolt Spacing Horizontals	Double Angle Stitch Bolt Spacing Redundants
ft	ft ²	in					in	in	in
3.0000									
L50 3.0000-2.7500				1	1	0.904623			
L51 2.7500-0.0000				1	1	0.916902			

Feed Line/Linear Appurtenances - Entered As Area

Description	Face or Leg	Allow Shield	Exclude From Torque Calculation	Component Type	Placement ft	Total Number		$C_A A_A$ ft ² /ft	Weight plf
1 1/4" Flat Reinforcement	B	No	No	CaAa (Out Of Face)	100.6600 - 0.0000	1	No Ice	0.2083	0.00
							1/2" Ice	0.3194	0.00
							1" Ice	0.4306	0.00
							2" Ice	0.6528	0.00
1" Flat Reinforcement	B	No	No	CaAa (Out Of Face)	130.7500 - 100.6600	1	No Ice	0.1667	0.00
							1/2" Ice	0.2778	0.00
							1" Ice	0.3889	0.00
							2" Ice	0.6111	0.00
1 1/4" Flat Reinforcement	B	No	No	CaAa (Out Of Face)	65.5833 - 0.0000	1	No Ice	0.2083	0.00
							1/2" Ice	0.3194	0.00
							1" Ice	0.4306	0.00
							2" Ice	0.6528	0.00

LDF7-50A(1-5/8)	B	No	No	Inside Pole	154.0000 - 0.0000	4	No Ice	0.0000	0.82
							1/2" Ice	0.0000	0.82
							1" Ice	0.0000	0.82
							2" Ice	0.0000	0.82
HB114-1-0813U4-M5J(1-1/4)	B	No	No	Inside Pole	150.0000 - 0.0000	3	No Ice	0.0000	1.20
							1/2" Ice	0.0000	1.20
							1" Ice	0.0000	1.20
							2" Ice	0.0000	1.20
HB114-13U3M12-XXXF(1-1/4)	B	No	No	Inside Pole	150.0000 - 0.0000	1	No Ice	0.0000	0.99
							1/2" Ice	0.0000	0.99
							1" Ice	0.0000	0.99
							2" Ice	0.0000	0.99
HB114-U6S12-XXX-LI(1-1/4)	B	No	No	Inside Pole	143.0000 - 0.0000	12	No Ice	0.0000	1.70
							1/2" Ice	0.0000	1.70
							1" Ice	0.0000	1.70
							2" Ice	0.0000	1.70
LDF7-50A(1-5/8)	B	No	No	Inside Pole	143.0000 - 0.0000	1	No Ice	0.0000	0.82
							1/2" Ice	0.0000	0.82
							1" Ice	0.0000	0.82
							2" Ice	0.0000	0.82

Feed Line/Linear Appurtenances Section Areas

Tower Section	Tower Elevation	Face	A_R ft ²	A_F ft ²	$C_A A_A$ In Face ft ²	$C_A A_A$ Out Face ft ²	Weight K
L1	156.0000-151.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.000	0.01
		C	0.000	0.000	0.000	0.000	0.00

Tower Sectio n	Tower Elevation ft	Face	A _R ft ²	A _F ft ²	C _{AA} In Face ft ²	C _{AA} Out Face ft ²	Weight K
L2	151.0000- 146.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.000	0.03
		C	0.000	0.000	0.000	0.000	0.00
L3	146.0000- 144.5000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.000	0.01
		C	0.000	0.000	0.000	0.000	0.00
L4	144.5000- 144.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.000	0.00
		C	0.000	0.000	0.000	0.000	0.00
L5	144.0000- 139.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.000	0.12
		C	0.000	0.000	0.000	0.000	0.00
L6	139.0000- 134.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.000	0.15
		C	0.000	0.000	0.000	0.000	0.00
L7	134.0000- 129.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.292	0.15
		C	0.000	0.000	0.000	0.000	0.00
L8	129.0000- 128.2500	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.125	0.02
		C	0.000	0.000	0.000	0.000	0.00
L9	128.2500- 128.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.042	0.01
		C	0.000	0.000	0.000	0.000	0.00
L10	128.0000- 123.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.833	0.15
		C	0.000	0.000	0.000	0.000	0.00
L11	123.0000- 118.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.833	0.15
		C	0.000	0.000	0.000	0.000	0.00
L12	118.0000- 113.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.833	0.15
		C	0.000	0.000	0.000	0.000	0.00
L13	113.0000- 108.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.833	0.15
		C	0.000	0.000	0.000	0.000	0.00
L14	108.0000- 103.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.833	0.15
		C	0.000	0.000	0.000	0.000	0.00
L15	103.0000- 98.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.944	0.15
		C	0.000	0.000	0.000	0.000	0.00
L16	98.0000-93.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	1.042	0.15
		C	0.000	0.000	0.000	0.000	0.00
L17	93.0000-92.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.208	0.03
		C	0.000	0.000	0.000	0.000	0.00
L18	92.0000-87.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	1.042	0.15
		C	0.000	0.000	0.000	0.000	0.00
L19	87.0000-82.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	1.042	0.15
		C	0.000	0.000	0.000	0.000	0.00
L20	82.0000-77.5000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.937	0.13
		C	0.000	0.000	0.000	0.000	0.00
L21	77.5000-72.5000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	1.042	0.15
		C	0.000	0.000	0.000	0.000	0.00
L22	72.5000-70.5800	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.400	0.06
		C	0.000	0.000	0.000	0.000	0.00
L23	70.5800-70.3300	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.052	0.01

Tower Sectio n	Tower Elevation ft	Face	A _R ft ²	A _F ft ²	C _{AA} In Face ft ²	C _{AA} Out Face ft ²	Weight K
L24	70.3300-67.0800	C	0.000	0.000	0.000	0.000	0.00
		A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.677	0.09
		C	0.000	0.000	0.000	0.000	0.00
L25	67.0800-66.8300	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.052	0.01
		C	0.000	0.000	0.000	0.000	0.00
L26	66.8300-61.8300	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	1.824	0.15
		C	0.000	0.000	0.000	0.000	0.00
L27	61.8300-57.5000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	1.804	0.13
		C	0.000	0.000	0.000	0.000	0.00
L28	57.5000-56.7500	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.312	0.02
		C	0.000	0.000	0.000	0.000	0.00
L29	56.7500-51.7500	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	2.083	0.15
		C	0.000	0.000	0.000	0.000	0.00
L30	51.7500-46.7500	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	2.083	0.15
		C	0.000	0.000	0.000	0.000	0.00
L31	46.7500-41.7500	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	2.083	0.15
		C	0.000	0.000	0.000	0.000	0.00
L32	41.7500-39.8000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.812	0.06
		C	0.000	0.000	0.000	0.000	0.00
L33	39.8000-39.3300	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.196	0.01
		C	0.000	0.000	0.000	0.000	0.00
L34	39.3300-39.0800	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.104	0.01
		C	0.000	0.000	0.000	0.000	0.00
L35	39.0800-38.3300	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.312	0.02
		C	0.000	0.000	0.000	0.000	0.00
L36	38.3300-38.0800	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.104	0.01
		C	0.000	0.000	0.000	0.000	0.00
L37	38.0800-33.0800	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	2.083	0.15
		C	0.000	0.000	0.000	0.000	0.00
L38	33.0800-30.7500	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.971	0.07
		C	0.000	0.000	0.000	0.000	0.00
L39	30.7500-30.5000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.104	0.01
		C	0.000	0.000	0.000	0.000	0.00
L40	30.5000-25.5000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	2.083	0.15
		C	0.000	0.000	0.000	0.000	0.00
L41	25.5000-20.5000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	2.083	0.15
		C	0.000	0.000	0.000	0.000	0.00
L42	20.5000-15.5000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	2.083	0.15
		C	0.000	0.000	0.000	0.000	0.00
L43	15.5000-9.8000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	2.375	0.17
		C	0.000	0.000	0.000	0.000	0.00
L44	9.8000-8.8000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.417	0.03
		C	0.000	0.000	0.000	0.000	0.00
L45	8.8000-8.2500	A	0.000	0.000	0.000	0.000	0.00

Tower Section n	Tower Elevation ft	Face	A _R ft ²	A _F ft ²	C _A A _A In Face ft ²	C _A A _A Out Face ft ²	Weight K
		B	0.000	0.000	0.000	0.229	0.02
		C	0.000	0.000	0.000	0.000	0.00
L46	8.2500-8.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.104	0.01
		C	0.000	0.000	0.000	0.000	0.00
L47	8.0000-4.2500	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	1.562	0.11
		C	0.000	0.000	0.000	0.000	0.00
L48	4.2500-4.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.104	0.01
		C	0.000	0.000	0.000	0.000	0.00
L49	4.0000-3.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.417	0.03
		C	0.000	0.000	0.000	0.000	0.00
L50	3.0000-2.7500	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.104	0.01
		C	0.000	0.000	0.000	0.000	0.00
L51	2.7500-0.0000	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	1.146	0.08
		C	0.000	0.000	0.000	0.000	0.00

Feed Line/Linear Appurtenances Section Areas - With Ice

Tower Section n	Tower Elevation ft	Face or Leg	Ice Thickness in	A _R ft ²	A _F ft ²	C _A A _A In Face ft ²	C _A A _A Out Face ft ²	Weight K
L1	156.0000-151.0000	A	1.487	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.000	0.01
		C		0.000	0.000	0.000	0.000	0.00
L2	151.0000-146.0000	A	1.482	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.000	0.03
		C		0.000	0.000	0.000	0.000	0.00
L3	146.0000-144.5000	A	1.479	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.000	0.01
		C		0.000	0.000	0.000	0.000	0.00
L4	144.5000-144.0000	A	1.478	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.000	0.00
		C		0.000	0.000	0.000	0.000	0.00
L5	144.0000-139.0000	A	1.475	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.000	0.12
		C		0.000	0.000	0.000	0.000	0.00
L6	139.0000-134.0000	A	1.469	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.000	0.15
		C		0.000	0.000	0.000	0.000	0.00
L7	134.0000-129.0000	A	1.464	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.861	0.15
		C		0.000	0.000	0.000	0.000	0.00
L8	129.0000-128.2500	A	1.461	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.368	0.02
		C		0.000	0.000	0.000	0.000	0.00
L9	128.2500-128.0000	A	1.460	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.123	0.01
		C		0.000	0.000	0.000	0.000	0.00
L10	128.0000-123.0000	A	1.457	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	2.452	0.15
		C		0.000	0.000	0.000	0.000	0.00
L11	123.0000-118.0000	A	1.451	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	2.446	0.15
		C		0.000	0.000	0.000	0.000	0.00
L12	118.0000-113.0000	A	1.445	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	2.439	0.15
		C		0.000	0.000	0.000	0.000	0.00

Tower Section	Tower Elevation ft	Face or Leg	Ice Thickness in	A_R ft ²	A_F ft ²	C_{AA} In Face ft ²	C_{AA} Out Face ft ²	Weight K
L13	113.0000-108.0000	A	1.439	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	2.432	0.15
		C		0.000	0.000	0.000	0.000	0.00
L14	108.0000-103.0000	A	1.432	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	2.425	0.15
		C		0.000	0.000	0.000	0.000	0.00
L15	103.0000-98.0000	A	1.425	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	2.528	0.15
		C		0.000	0.000	0.000	0.000	0.00
L16	98.0000-93.0000	A	1.418	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	2.617	0.15
		C		0.000	0.000	0.000	0.000	0.00
L17	93.0000-92.0000	A	1.413	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.523	0.03
		C		0.000	0.000	0.000	0.000	0.00
L18	92.0000-87.0000	A	1.409	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	2.607	0.15
		C		0.000	0.000	0.000	0.000	0.00
L19	87.0000-82.0000	A	1.401	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	2.598	0.15
		C		0.000	0.000	0.000	0.000	0.00
L20	82.0000-77.5000	A	1.393	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	2.330	0.13
		C		0.000	0.000	0.000	0.000	0.00
L21	77.5000-72.5000	A	1.384	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	2.580	0.15
		C		0.000	0.000	0.000	0.000	0.00
L22	72.5000-70.5800	A	1.378	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.988	0.06
		C		0.000	0.000	0.000	0.000	0.00
L23	70.5800-70.3300	A	1.375	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.128	0.01
		C		0.000	0.000	0.000	0.000	0.00
L24	70.3300-67.0800	A	1.372	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	1.668	0.09
		C		0.000	0.000	0.000	0.000	0.00
L25	67.0800-66.8300	A	1.368	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.128	0.01
		C		0.000	0.000	0.000	0.000	0.00
L26	66.8300-61.8300	A	1.363	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	4.475	0.15
		C		0.000	0.000	0.000	0.000	0.00
L27	61.8300-57.5000	A	1.353	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	4.408	0.13
		C		0.000	0.000	0.000	0.000	0.00
L28	57.5000-56.7500	A	1.347	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.763	0.02
		C		0.000	0.000	0.000	0.000	0.00
L29	56.7500-51.7500	A	1.340	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	5.061	0.15
		C		0.000	0.000	0.000	0.000	0.00
L30	51.7500-46.7500	A	1.327	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	5.032	0.15
		C		0.000	0.000	0.000	0.000	0.00
L31	46.7500-41.7500	A	1.313	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	5.001	0.15
		C		0.000	0.000	0.000	0.000	0.00
L32	41.7500-39.8000	A	1.302	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	1.941	0.06
		C		0.000	0.000	0.000	0.000	0.00
L33	39.8000-39.3300	A	1.298	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.467	0.01
		C		0.000	0.000	0.000	0.000	0.00
L34	39.3300-39.0800	A	1.297	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.248	0.01

Tower Section	Tower Elevation	Face or Leg	Ice Thickness	A_R	A_F	C_{AA} In Face	C_{AA} Out Face	Weight
<i>n</i>	<i>ft</i>		<i>in</i>	<i>ft²</i>	<i>ft²</i>	<i>ft²</i>	<i>ft²</i>	<i>K</i>
L35	39.0800-38.3300	C		0.000	0.000	0.000	0.000	0.00
		A	1.295	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.744	0.02
		C		0.000	0.000	0.000	0.000	0.00
L36	38.3300-38.0800	A	1.294	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.248	0.01
		C		0.000	0.000	0.000	0.000	0.00
L37	38.0800-33.0800	A	1.285	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	4.938	0.15
		C		0.000	0.000	0.000	0.000	0.00
L38	33.0800-30.7500	A	1.271	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	2.287	0.07
		C		0.000	0.000	0.000	0.000	0.00
L39	30.7500-30.5000	A	1.266	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.245	0.01
		C		0.000	0.000	0.000	0.000	0.00
L40	30.5000-25.5000	A	1.254	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	4.870	0.15
		C		0.000	0.000	0.000	0.000	0.00
L41	25.5000-20.5000	A	1.230	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	4.816	0.15
		C		0.000	0.000	0.000	0.000	0.00
L42	20.5000-15.5000	A	1.200	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	4.750	0.15
		C		0.000	0.000	0.000	0.000	0.00
L43	15.5000-9.8000	A	1.158	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	5.309	0.17
		C		0.000	0.000	0.000	0.000	0.00
L44	9.8000-8.8000	A	1.123	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.931	0.03
		C		0.000	0.000	0.000	0.000	0.00
L45	8.8000-8.2500	A	1.114	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.501	0.02
		C		0.000	0.000	0.000	0.000	0.00
L46	8.2500-8.0000	A	1.108	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.227	0.01
		C		0.000	0.000	0.000	0.000	0.00
L47	8.0000-4.2500	A	1.077	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	3.358	0.11
		C		0.000	0.000	0.000	0.000	0.00
L48	4.2500-4.0000	A	1.036	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.219	0.01
		C		0.000	0.000	0.000	0.000	0.00
L49	4.0000-3.0000	A	1.019	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.869	0.03
		C		0.000	0.000	0.000	0.000	0.00
L50	3.0000-2.7500	A	0.999	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.215	0.01
		C		0.000	0.000	0.000	0.000	0.00
L51	2.7500-0.0000	A	0.928	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	2.280	0.08
		C		0.000	0.000	0.000	0.000	0.00

Feed Line Center of Pressure

Section	Elevation	CP_x	CP_z	CP_x	CP_z
	<i>ft</i>	<i>in</i>	<i>in</i>	<i>Ice in</i>	<i>Ice in</i>
L1	156.0000-151.0000	0.0000	0.0000	0.0000	0.0000
L2	151.0000-	0.0000	0.0000	0.0000	0.0000

Section	Elevation	CP _x	CP _z	CP _x Ice	CP _z Ice
	ft	in	in	in	in
L3	146.0000-144.5000	0.0000	0.0000	0.0000	0.0000
L4	144.5000-144.0000	0.0000	0.0000	0.0000	0.0000
L5	144.0000-139.0000	0.0000	0.0000	0.0000	0.0000
L6	139.0000-134.0000	0.0000	0.0000	0.0000	0.0000
L7	134.0000-129.0000	0.3035	0.1752	0.6010	0.3470
L8	129.0000-128.2500	0.8055	0.4650	1.5132	0.8736
L9	128.2500-128.0000	0.8097	0.4675	1.5206	0.8779
L10	128.0000-123.0000	0.8110	0.4683	1.5281	0.8822
L11	123.0000-118.0000	0.8136	0.4697	1.5416	0.8900
L12	118.0000-113.0000	0.8158	0.4710	1.5535	0.8969
L13	113.0000-108.0000	0.8180	0.4723	1.5646	0.9033
L14	108.0000-103.0000	0.8201	0.4735	1.5745	0.9090
L15	103.0000-98.0000	0.9234	0.5331	1.6462	0.9504
L16	98.0000-93.0000	1.0121	0.5843	1.7091	0.9867
L17	93.0000-92.0000	1.0148	0.5859	1.7136	0.9893
L18	92.0000-87.0000	1.0161	0.5867	1.7159	0.9907
L19	87.0000-82.0000	1.0184	0.5880	1.7232	0.9949
L20	82.0000-77.5000	1.0206	0.5892	1.7294	0.9985
L21	77.5000-72.5000	1.0233	0.5908	1.7357	1.0021
L22	72.5000-70.5800	1.0248	0.5917	1.7392	1.0041
L23	70.5800-70.3300	1.0253	0.5919	1.7401	1.0047
L24	70.3300-67.0800	1.0259	0.5923	1.7414	1.0054
L25	67.0800-66.8300	1.0297	0.5945	1.7473	1.0088
L26	66.8300-61.8300	1.7127	0.9888	2.8048	1.6193
L27	61.8300-57.5000	1.9269	1.1125	3.1241	1.8037
L28	57.5000-56.7500	1.9256	1.1117	3.1202	1.8015
L29	56.7500-51.7500	1.9290	1.1137	3.1209	1.8019
L30	51.7500-46.7500	1.9353	1.1174	3.1307	1.8075
L31	46.7500-41.7500	1.9413	1.1208	3.1378	1.8116
L32	41.7500-39.8000	1.9453	1.1231	3.1412	1.8136
L33	39.8000-39.3300	1.9479	1.1246	3.1437	1.8150
L34	39.3300-39.0800	1.9481	1.1247	3.1437	1.8150
L35	39.0800-38.3300	1.9487	1.1251	3.1440	1.8152
L36	38.3300-38.0800	1.9485	1.1249	3.1431	1.8147
L37	38.0800-33.0800	1.9512	1.1265	3.1437	1.8150
L38	33.0800-30.7500	1.9551	1.1288	3.1429	1.8145
L39	30.7500-30.5000	1.9576	1.1302	3.1438	1.8151
L40	30.5000-25.5000	1.9602	1.1317	3.1410	1.8135
L41	25.5000-20.5000	1.9650	1.1345	3.1318	1.8081
L42	20.5000-15.5000	1.9697	1.1372	3.1156	1.7988
L43	15.5000-9.8000	1.9747	1.1401	3.0862	1.7818
L44	9.8000-8.8000	1.9740	1.1397	3.0841	1.7806
L45	8.8000-8.2500	1.9747	1.1401	3.0366	1.7532
L46	8.2500-8.0000	1.9750	1.1403	3.0317	1.7503
L47	8.0000-4.2500	1.9769	1.1413	3.0022	1.7333
L48	4.2500-4.0000	1.9812	1.1438	2.9631	1.7108
L49	4.0000-3.0000	1.9817	1.1441	2.9452	1.7004
L50	3.0000-2.7500	1.9837	1.1453	2.9256	1.6891
L51	2.7500-0.0000	1.9846	1.1458	2.8449	1.6425

Note: For pole sections, center of pressure calculations do not consider feed line shielding.

Shielding Factor Ka

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
---------------	----------------------	-------------	-------------------------	-----------------------	--------------------

Discrete Tower Loads

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustmen t °	Placement ft	C _A A _A Front ft ²	C _A A _A Side ft ²	Weight K	
NNVV-65B-R4	A	From Leg	4.0000	0.00	150.0000	No Ice	12.2711	5.7500	0.08
			0.00			1/2"	12.7660	6.2069	0.15
			0.00			Ice	13.2679	6.6713	0.23
						1" Ice	14.2927	7.6222	0.41
						2" Ice			
NNVV-65B-R4	B	From Leg	4.0000	0.00	150.0000	No Ice	12.2711	5.7500	0.08
			0.00			1/2"	12.7660	6.2069	0.15
			0.00			Ice	13.2679	6.6713	0.23
						1" Ice	14.2927	7.6222	0.41
						2" Ice			
NNVV-65B-R4	C	From Leg	4.0000	0.00	150.0000	No Ice	12.2711	5.7500	0.08
			0.00			1/2"	12.7660	6.2069	0.15
			0.00			Ice	13.2679	6.6713	0.23
						1" Ice	14.2927	7.6222	0.41
						2" Ice			
APXVTM14-ALU-I20	A	From Leg	4.0000	0.00	150.0000	No Ice	6.3424	3.6074	0.06
			0.00			1/2"	6.7164	3.9666	0.10
			0.00			Ice	7.0974	4.3332	0.14
						1" Ice	7.8804	5.0713	0.25
						2" Ice			
APXVTM14-ALU-I20	B	From Leg	4.0000	0.00	150.0000	No Ice	6.3424	3.6074	0.06
			0.00			1/2"	6.7164	3.9666	0.10
			0.00			Ice	7.0974	4.3332	0.14
						1" Ice	7.8804	5.0713	0.25
						2" Ice			
APXVTM14-ALU-I20	C	From Leg	4.0000	0.00	150.0000	No Ice	6.3424	3.6074	0.06
			0.00			1/2"	6.7164	3.9666	0.10
			0.00			Ice	7.0974	4.3332	0.14
						1" Ice	7.8804	5.0713	0.25
						2" Ice			
TD-RRH8X20-25	A	From Leg	4.0000	0.00	150.0000	No Ice	4.0455	1.5345	0.07
			0.00			1/2"	4.2975	1.7142	0.10
			0.00			Ice	4.5570	1.9008	0.13
						1" Ice	5.0981	2.2951	0.20
						2" Ice			
TD-RRH8X20-25	A	From Leg	4.0000	0.00	150.0000	No Ice	4.0455	1.5345	0.07
			0.00			1/2"	4.2975	1.7142	0.10
			0.00			Ice	4.5570	1.9008	0.13
						1" Ice	5.0981	2.2951	0.20
						2" Ice			
TD-RRH8X20-25	B	From Leg	4.0000	0.00	150.0000	No Ice	4.0455	1.5345	0.07
			0.00			1/2"	4.2975	1.7142	0.10
			0.00			Ice	4.5570	1.9008	0.13
						1" Ice	5.0981	2.2951	0.20
						2" Ice			

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustment t °	Placement ft		C _{AA} Front ft ²	C _{AA} Side ft ²	Weight K
PCS 1900MHZ 4X45W-65MHZ	A	From Leg	4.0000 0.00 0.00	0.00	150.0000	No Ice	2.3218	2.2381	0.06
						1/2" Ice	2.5266	2.4407	0.08
						Ice	2.7388	2.6507	0.11
						1" Ice	3.1855	3.0929	0.17
						2" Ice			
PCS 1900MHZ 4X45W-65MHZ	A	From Leg	4.0000 0.00 0.00	0.00	150.0000	No Ice	2.3218	2.2381	0.06
						1/2" Ice	2.5266	2.4407	0.08
						Ice	2.7388	2.6507	0.11
						1" Ice	3.1855	3.0929	0.17
						2" Ice			
PCS 1900MHZ 4X45W-65MHZ	B	From Leg	4.0000 0.00 0.00	0.00	150.0000	No Ice	2.3218	2.2381	0.06
						1/2" Ice	2.5266	2.4407	0.08
						Ice	2.7388	2.6507	0.11
						1" Ice	3.1855	3.0929	0.17
						2" Ice			
(2) RRH2X50-800	A	From Leg	4.0000 0.00 0.00	0.00	150.0000	No Ice	1.7008	1.2822	0.05
						1/2" Ice	1.8640	1.4275	0.07
						Ice	2.0345	1.5803	0.09
						1" Ice	2.3979	1.9081	0.14
						2" Ice			
(2) RRH2X50-800	A	From Leg	4.0000 0.00 0.00	0.00	150.0000	No Ice	1.7008	1.2822	0.05
						1/2" Ice	1.8640	1.4275	0.07
						Ice	2.0345	1.5803	0.09
						1" Ice	2.3979	1.9081	0.14
						2" Ice			
(2) RRH2X50-800	B	From Leg	4.0000 0.00 0.00	0.00	150.0000	No Ice	1.7008	1.2822	0.05
						1/2" Ice	1.8640	1.4275	0.07
						Ice	2.0345	1.5803	0.09
						1" Ice	2.3979	1.9081	0.14
						2" Ice			
(2) Pipe Mount [PM 601-3]	A	None		0.00	150.0000	No Ice	4.3900	4.3900	0.20
						1/2" Ice	5.4800	5.4800	0.24
						Ice	6.5700	6.5700	0.28
						1" Ice	8.7500	8.7500	0.36
						2" Ice			

RR90-17-VDPL2 w/ Mount Pipe	A	From Leg	4.0000 0.00 0.00	0.00	154.0000	No Ice	4.5931	3.3421	0.03
						1/2" Ice	5.0183	4.1118	0.07
						Ice	5.4362	4.8076	0.12
						1" Ice	6.2979	6.2492	0.22
						2" Ice			
RR90-17-VDPL2 w/ Mount Pipe	C	From Leg	4.0000 0.00 0.00	0.00	154.0000	No Ice	4.5931	3.3421	0.03
						1/2" Ice	5.0183	4.1118	0.07
						Ice	5.4362	4.8076	0.12
						1" Ice	6.2979	6.2492	0.22
						2" Ice			
Pipe Mount [PM 602-1]	A	From Leg	4.0000 0.00 0.00	0.00	154.0000	No Ice	5.2500	1.5800	0.09
						1/2" Ice	6.5000	1.9500	0.12
						Ice	7.7500	2.3200	0.14
						1" Ice	10.2500	3.0600	0.19
						2" Ice			
Pipe Mount [PM 602-1]	C	From Leg	4.0000 0.00 0.00	0.00	154.0000	No Ice	5.2500	1.5800	0.09
						1/2" Ice	6.5000	1.9500	0.12
						Ice	7.7500	2.3200	0.14
						1" Ice	10.2500	3.0600	0.19
						2" Ice			

(2) ATMAA1412D-1A20	A	From Leg	4.0000 0.00 0.00	-30.00	143.0000	No Ice	1.0000	0.4074	0.01
						1/2" Ice	1.1259	0.4965	0.02
						Ice	1.2593	0.5926	0.03
						1" Ice	1.5481	0.8148	0.06
						2" Ice			

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustment t °	Placement ft	C _{AA} Front ft ²	C _{AA} Side ft ²	Weight K	
(2) ATMAA1412D-1A20	B	From Leg	4.0000 0.00 0.00	-30.00	143.0000	2" Ice			
						No Ice	1.0000	0.4074	0.01
						1/2"	1.1259	0.4965	0.02
						Ice	1.2593	0.5926	0.03
						1" Ice	1.5481	0.8148	0.06
(2) ATMAA1412D-1A20	C	From Leg	4.0000 0.00 0.00	-30.00	143.0000	2" Ice			
						No Ice	1.0000	0.4074	0.01
						1/2"	1.1259	0.4965	0.02
						Ice	1.2593	0.5926	0.03
						1" Ice	1.5481	0.8148	0.06
RADIO 4449 B12/B71	A	From Leg	4.0000 0.00 0.00	-30.00	143.0000	2" Ice			
						No Ice	1.6500	1.1625	0.07
						1/2"	1.8104	1.3012	0.09
						Ice	1.9781	1.4473	0.11
						1" Ice	2.3359	1.7618	0.16
RADIO 4449 B12/B71	B	From Leg	4.0000 0.00 0.00	-30.00	143.0000	2" Ice			
						No Ice	1.6500	1.1625	0.07
						1/2"	1.8104	1.3012	0.09
						Ice	1.9781	1.4473	0.11
						1" Ice	2.3359	1.7618	0.16
RADIO 4449 B12/B71	C	From Leg	4.0000 0.00 0.00	-30.00	143.0000	2" Ice			
						No Ice	1.6500	1.1625	0.07
						1/2"	1.8104	1.3012	0.09
						Ice	1.9781	1.4473	0.11
						1" Ice	2.3359	1.7618	0.16
APX16DWV-16DWV-S-E-A20 w/ Mount Pipe	A	From Leg	4.0000 0.00 0.00	-30.00	143.0000	2" Ice			
						No Ice	6.8239	3.4938	0.06
						1/2"	7.2751	4.2631	0.11
						Ice	7.7192	4.9598	0.16
						1" Ice	8.6333	6.4031	0.30
APX16DWV-16DWV-S-E-A20 w/ Mount Pipe	B	From Leg	4.0000 0.00 0.00	-30.00	143.0000	2" Ice			
						No Ice	6.8239	3.4938	0.06
						1/2"	7.2751	4.2631	0.11
						Ice	7.7192	4.9598	0.16
						1" Ice	8.6333	6.4031	0.30
APX16DWV-16DWV-S-E-A20 w/ Mount Pipe	C	From Leg	4.0000 0.00 0.00	-30.00	143.0000	2" Ice			
						No Ice	6.8239	3.4938	0.06
						1/2"	7.2751	4.2631	0.11
						Ice	7.7192	4.9598	0.16
						1" Ice	8.6333	6.4031	0.30
APXVAA24_43-U-A20 w/ Mount Pipe	A	From Leg	4.0000 0.00 0.00	-30.00	143.0000	2" Ice			
						No Ice	20.5042	10.8819	0.13
						1/2"	21.2552	12.4078	0.27
						Ice	22.0151	13.9578	0.42
						1" Ice	23.4705	16.3111	0.75
APXVAA24_43-U-A20 w/ Mount Pipe	B	From Leg	4.0000 0.00 0.00	-30.00	143.0000	2" Ice			
						No Ice	20.5042	10.8819	0.13
						1/2"	21.2552	12.4078	0.27
						Ice	22.0151	13.9578	0.42
						1" Ice	23.4705	16.3111	0.75
APXVAA24_43-U-A20 w/ Mount Pipe	C	From Leg	4.0000 0.00 0.00	-30.00	143.0000	2" Ice			
						No Ice	20.5042	10.8819	0.13
						1/2"	21.2552	12.4078	0.27
						Ice	22.0151	13.9578	0.42
						1" Ice	23.4705	16.3111	0.75
Platform Mount [LP 701-1]	B	None		0.00	143.0000	2" Ice			
						No Ice	59.1500	59.1500	2.75
						1/2"	71.1200	71.1200	3.42
						Ice	83.0900	83.0900	4.10
						1" Ice	107.0300	107.0300	5.45

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustment t °	Placement ft		C _A A _A Front ft ²	C _A A _A Side ft ²	Weight K

(2) 980H120T4E-M w/ Mount Pipe	B	From Leg	4.0000 0.00 0.00	0.00	120.0000	No Ice	4.1333	3.7167	0.03
						1/2" Ice	4.5970	4.5791	0.07
						1" Ice	5.0462	5.3180	0.11
						2" Ice	5.9710	6.8458	0.22
						Platform Mount [LP 1201-1]	B	None	0.00
1/2" Ice	26.8000	26.8000	2.50						
1" Ice	30.5000	30.5000	2.90						
2" Ice	37.9000	37.9000	3.70						
6' x 2.375" Pipe Mount	B	From Leg	4.0000 0.00 0.00	0.00	120.0000	No Ice	1.4250	1.4250	0.02
						1/2" Ice	1.9250	1.9250	0.03
						1" Ice	2.2939	2.2939	0.05
						2" Ice	3.0596	3.0596	0.09
						(3) 6' x 2.375" Pipe Mount	A	From Leg	4.0000 0.00 0.00
1/2" Ice	1.9250	1.9250	0.03						
1" Ice	2.2939	2.2939	0.05						
2" Ice	3.0596	3.0596	0.09						
(3) 6' x 2.375" Pipe Mount	C	From Leg	4.0000 0.00 0.00	0.00	120.0000	No Ice	1.4250	1.4250	0.02
						1/2" Ice	1.9250	1.9250	0.03
						1" Ice	2.2939	2.2939	0.05
						2" Ice	3.0596	3.0596	0.09

Tower Pressures - No Ice

$G_H = 1.100$

Section Elevation ft	z ft	K _Z	q _z psf	A _G ft ²	F a c e	A _F ft ²	A _R ft ²	A _{leg} ft ²	Leg %	C _A A _A In Face ft ²	C _A A _A Out Face ft ²
L1 156.0000-151.0000	153.5000	1.385	52.88	4.479	A	0.000	4.479	4.479	100.00	0.000	0.000
					B	0.000	4.479		100.00	0.000	0.000
					C	0.000	4.479		100.00	0.000	0.000
L2 151.0000-146.0000	148.5000	1.375	52.51	4.479	A	0.000	4.479	4.479	100.00	0.000	0.000
					B	0.000	4.479		100.00	0.000	0.000
					C	0.000	4.479		100.00	0.000	0.000
L3 146.0000-144.5000	145.2500	1.369	52.27	1.344	A	0.000	1.344	1.344	100.00	0.000	0.000
					B	0.000	1.344		100.00	0.000	0.000
					C	0.000	1.344		100.00	0.000	0.000
L4 144.5000-144.0000	144.2290	1.367	52.19	0.599	A	0.000	0.599	0.599	100.00	0.000	0.000
					B	0.000	0.599		100.00	0.000	0.000
					C	0.000	0.599		100.00	0.000	0.000
L5 144.0000-139.0000	141.4787	1.362	51.98	7.931	A	0.000	7.931	7.931	100.00	0.000	0.000
					B	0.000	7.931		100.00	0.000	0.000
					C	0.000	7.931		100.00	0.000	0.000
L6 139.0000-134.0000	136.4798	1.351	51.59	8.338	A	0.000	8.338	8.338	100.00	0.000	0.000
					B	0.000	8.338		100.00	0.000	0.000
					C	0.000	8.338		100.00	0.000	0.000
L7 134.0000-	131.4807	1.341	51.18	8.745	A	0.000	8.745	8.745	100.00	0.000	0.000

Section Elevation	z	K _Z	q _z	A _G	F a c e	A _F	A _R	A _{leg}	Leg %	C _A A _A In Face ft ²	C _A A _A Out Face ft ²
ft	ft		psf	ft ²		ft ²	ft ²	ft ²		ft ²	ft ²
129.0000					B	0.000	8.745		100.00	0.000	0.292
					C	0.000	8.745		100.00	0.000	0.000
L8 129.0000-	128.6246	1.334	50.95	1.347	A	0.000	1.347	1.347	100.00	0.000	0.000
128.2500					B	0.000	1.347		100.00	0.000	0.125
					C	0.000	1.347		100.00	0.000	0.000
L9 128.2500-	128.1250	1.333	50.90	0.449	A	0.000	0.449	0.449	100.00	0.000	0.000
128.0000					B	0.000	0.449		100.00	0.000	0.042
					C	0.000	0.449		100.00	0.000	0.000
L10	125.4817	1.328	50.68	9.188	A	0.000	9.188	9.188	100.00	0.000	0.000
128.0000-					B	0.000	9.188		100.00	0.000	0.833
123.0000					C	0.000	9.188		100.00	0.000	0.000
L11	120.4825	1.316	50.25	9.597	A	0.000	9.597	9.597	100.00	0.000	0.000
123.0000-					B	0.000	9.597		100.00	0.000	0.833
118.0000					C	0.000	9.597		100.00	0.000	0.000
L12	115.4832	1.305	49.80	10.007	A	0.000	10.007	10.007	100.00	0.000	0.000
118.0000-					B	0.000	10.007		100.00	0.000	0.833
113.0000					C	0.000	10.007		100.00	0.000	0.000
L13	110.4838	1.292	49.34	10.416	A	0.000	10.416	10.416	100.00	0.000	0.000
113.0000-					B	0.000	10.416		100.00	0.000	0.833
108.0000					C	0.000	10.416		100.00	0.000	0.000
L14	105.4844	1.28	48.86	10.825	A	0.000	10.825	10.825	100.00	0.000	0.000
108.0000-					B	0.000	10.825		100.00	0.000	0.833
103.0000					C	0.000	10.825		100.00	0.000	0.000
L15	100.4850	1.267	48.37	11.233	A	0.000	11.233	11.233	100.00	0.000	0.000
103.0000-					B	0.000	11.233		100.00	0.000	0.944
98.0000					C	0.000	11.233		100.00	0.000	0.000
L16 98.0000-	95.4855	1.253	47.85	11.641	A	0.000	11.641	11.641	100.00	0.000	0.000
93.0000					B	0.000	11.641		100.00	0.000	1.042
					C	0.000	11.641		100.00	0.000	0.000
L17 93.0000-	92.4994	1.245	47.53	2.328	A	0.000	2.328	2.328	100.00	0.000	0.000
92.0000					B	0.000	2.328		100.00	0.000	0.208
					C	0.000	2.328		100.00	0.000	0.000
L18 92.0000-	89.4858	1.236	47.20	11.886	A	0.000	11.886	11.886	100.00	0.000	0.000
87.0000					B	0.000	11.886		100.00	0.000	1.042
					C	0.000	11.886		100.00	0.000	0.000
L19 87.0000-	84.4863	1.221	46.63	12.297	A	0.000	12.297	12.297	100.00	0.000	0.000
82.0000					B	0.000	12.297		100.00	0.000	1.042
					C	0.000	12.297		100.00	0.000	0.000
L20 82.0000-	79.7392	1.207	46.07	11.417	A	0.000	11.417	11.417	100.00	0.000	0.000
77.5000					B	0.000	11.417		100.00	0.000	0.937
					C	0.000	11.417		100.00	0.000	0.000
L21 77.5000-	74.9871	1.191	45.48	13.065	A	0.000	13.065	13.065	100.00	0.000	0.000
72.5000					B	0.000	13.065		100.00	0.000	1.042
					C	0.000	13.065		100.00	0.000	0.000
L22 72.5000-	71.5381	1.179	45.03	5.125	A	0.000	5.125	5.125	100.00	0.000	0.000
70.5800					B	0.000	5.125		100.00	0.000	0.400
					C	0.000	5.125		100.00	0.000	0.000
L23 70.5800-	70.4550	1.176	44.88	0.672	A	0.000	0.672	0.672	100.00	0.000	0.000
70.3300					B	0.000	0.672		100.00	0.000	0.052
					C	0.000	0.672		100.00	0.000	0.000
L24 70.3300-	68.6998	1.169	44.64	8.826	A	0.000	8.826	8.826	100.00	0.000	0.000
67.0800					B	0.000	8.826		100.00	0.000	0.677
					C	0.000	8.826		100.00	0.000	0.000
L25 67.0800-	66.9550	1.163	44.40	0.684	A	0.000	0.684	0.684	100.00	0.000	0.000
66.8300					B	0.000	0.684		100.00	0.000	0.052
					C	0.000	0.684		100.00	0.000	0.000
L26 66.8300-	64.3179	1.153	44.03	13.895	A	0.000	13.895	13.895	100.00	0.000	0.000
61.8300					B	0.000	13.895		100.00	0.000	1.824
					C	0.000	13.895		100.00	0.000	0.000
L27 61.8300-	59.6562	1.135	43.34	12.362	A	0.000	12.362	12.362	100.00	0.000	0.000
57.5000					B	0.000	12.362		100.00	0.000	1.804
					C	0.000	12.362		100.00	0.000	0.000
L28 57.5000-	57.1247	1.125	42.94	2.132	A	0.000	2.132	2.132	100.00	0.000	0.000
56.7500					B	0.000	2.132		100.00	0.000	0.312

Section Elevation ft	z ft	K _z	q _z psf	A _G ft ²	F a c e	A _F ft ²	A _R ft ²	A _{leg} ft ²	Leg %	C _A A _A In Face ft ²	C _A A _A Out Face ft ²
L29 56.7500-51.7500	54.2384	1.113	42.48	14.451	C	0.000	2.132		100.00	0.000	0.000
					A	0.000	14.451	14.451	100.00	0.000	0.000
					B	0.000	14.451		100.00	0.000	2.083
					C	0.000	14.451		100.00	0.000	0.000
L30 51.7500-46.7500	49.2387	1.09	41.62	14.860	A	0.000	14.860	14.860	100.00	0.000	0.000
					B	0.000	14.860		100.00	0.000	2.083
					C	0.000	14.860		100.00	0.000	0.000
L31 46.7500-41.7500	44.2390	1.066	40.69	15.269	A	0.000	15.269	15.269	100.00	0.000	0.000
					B	0.000	15.269		100.00	0.000	2.083
					C	0.000	15.269		100.00	0.000	0.000
L32 41.7500-39.8000	40.7734	1.048	40.00	6.066	A	0.000	6.066	6.066	100.00	0.000	0.000
					B	0.000	6.066		100.00	0.000	0.812
					C	0.000	6.066		100.00	0.000	0.000
L33 39.8000-39.3300	39.5649	1.041	39.75	1.470	A	0.000	1.470	1.470	100.00	0.000	0.000
					B	0.000	1.470		100.00	0.000	0.196
					C	0.000	1.470		100.00	0.000	0.000
L34 39.3300-39.0800	39.2050	1.039	39.67	0.784	A	0.000	0.784	0.784	100.00	0.000	0.000
					B	0.000	0.784		100.00	0.000	0.104
					C	0.000	0.784		100.00	0.000	0.000
L35 39.0800-38.3300	38.7048	1.036	39.57	2.357	A	0.000	2.357	2.357	100.00	0.000	0.000
					B	0.000	2.357		100.00	0.000	0.312
					C	0.000	2.357		100.00	0.000	0.000
L36 38.3300-38.0800	38.2050	1.034	39.46	0.788	A	0.000	0.788	0.788	100.00	0.000	0.000
					B	0.000	0.788		100.00	0.000	0.104
					C	0.000	0.788		100.00	0.000	0.000
L37 38.0800-33.0800	35.5695	1.018	38.87	15.977	A	0.000	15.977	15.977	100.00	0.000	0.000
					B	0.000	15.977		100.00	0.000	2.083
					C	0.000	15.977		100.00	0.000	0.000
L38 33.0800-30.7500	31.9128	0.995	37.99	7.585	A	0.000	7.585	7.585	100.00	0.000	0.000
					B	0.000	7.585		100.00	0.000	0.971
					C	0.000	7.585		100.00	0.000	0.000
L39 30.7500-30.5000	30.6250	0.987	37.66	0.819	A	0.000	0.819	0.819	100.00	0.000	0.000
					B	0.000	0.819		100.00	0.000	0.104
					C	0.000	0.819		100.00	0.000	0.000
L40 30.5000-25.5000	27.9899	0.968	36.96	16.586	A	0.000	16.586	16.586	100.00	0.000	0.000
					B	0.000	16.586		100.00	0.000	2.083
					C	0.000	16.586		100.00	0.000	0.000
L41 25.5000-20.5000	22.9901	0.929	35.46	16.997	A	0.000	16.997	16.997	100.00	0.000	0.000
					B	0.000	16.997		100.00	0.000	2.083
					C	0.000	16.997		100.00	0.000	0.000
L42 20.5000-15.5000	17.9903	0.882	33.67	17.406	A	0.000	17.406	17.406	100.00	0.000	0.000
					B	0.000	17.406		100.00	0.000	2.083
					C	0.000	17.406		100.00	0.000	0.000
L43 15.5000-9.8000	12.6377	0.85	32.45	20.339	A	0.000	20.339	20.339	100.00	0.000	0.000
					B	0.000	20.339		100.00	0.000	2.375
					C	0.000	20.339		100.00	0.000	0.000
L44 9.8000-8.8000	9.2996	0.85	32.45	3.559	A	0.000	3.559	3.559	100.00	0.000	0.000
					B	0.000	3.559		100.00	0.000	0.417
					C	0.000	3.559		100.00	0.000	0.000
L45 8.8000-8.2500	8.5249	0.85	32.45	1.964	A	0.000	1.964	1.964	100.00	0.000	0.000
					B	0.000	1.964		100.00	0.000	0.229
					C	0.000	1.964		100.00	0.000	0.000
L46 8.2500-8.0000	8.1250	0.85	32.45	0.894	A	0.000	0.894	0.894	100.00	0.000	0.000
					B	0.000	0.894		100.00	0.000	0.104
					C	0.000	0.894		100.00	0.000	0.000
L47 8.0000-4.2500	6.1198	0.85	32.45	13.538	A	0.000	13.538	13.538	100.00	0.000	0.000
					B	0.000	13.538		100.00	0.000	1.562
					C	0.000	13.538		100.00	0.000	0.000
L48 4.2500-4.0000	4.1250	0.85	32.45	0.909	A	0.000	0.909	0.909	100.00	0.000	0.000
					B	0.000	0.909		100.00	0.000	0.104
					C	0.000	0.909		100.00	0.000	0.000
L49 4.0000-3.0000	3.4996	0.85	32.45	3.648	A	0.000	3.648	3.648	100.00	0.000	0.000
					B	0.000	3.648		100.00	0.000	0.417
					C	0.000	3.648		100.00	0.000	0.000

Section Elevation	z	K _Z	q _z	A _G	F a c e	A _F	A _R	A _{leg}	Leg %	C _A A _A In Face	C _A A _A Out Face
ft	ft		psf	ft ²		ft ²	ft ²	ft ²		ft ²	ft ²
L50 3.0000-2.7500	2.8750	0.85	32.45	0.914	A	0.000	0.914	0.914	100.00	0.000	0.000
					B	0.000	0.914		100.00	0.000	0.104
					C	0.000	0.914		100.00	0.000	0.000
L51 2.7500-0.0000	1.3722	0.85	32.45	10.120	A	0.000	10.120	10.120	100.00	0.000	0.000
					B	0.000	10.120		100.00	0.000	1.146
					C	0.000	10.120		100.00	0.000	0.000

Tower Pressure - With Ice

G_H = 1.100

Section Elevation	z	K _Z	q _z	t _z	A _G	F a c e	A _F	A _R	A _{leg}	Leg %	C _A A _A In Face	C _A A _A Out Face
ft	ft		psf	in	ft ²		ft ²	ft ²	ft ²		ft ²	ft ²
L1 156.0000-151.0000	153.5000	1.385	7.82	1.4869	5.718	A	0.000	5.718	5.718	100.00	0.000	0.000
						B	0.000	5.718		100.00	0.000	0.000
						C	0.000	5.718		100.00	0.000	0.000
L2 151.0000-146.0000	148.5000	1.375	7.77	1.4819	5.714	A	0.000	5.714	5.714	100.00	0.000	0.000
						B	0.000	5.714		100.00	0.000	0.000
						C	0.000	5.714		100.00	0.000	0.000
L3 146.0000-144.5000	145.2500	1.369	7.73	1.4787	1.713	A	0.000	1.713	1.713	100.00	0.000	0.000
						B	0.000	1.713		100.00	0.000	0.000
						C	0.000	1.713		100.00	0.000	0.000
L4 144.5000-144.0000	144.2290	1.367	7.72	1.4776	0.722	A	0.000	0.722	0.722	100.00	0.000	0.000
						B	0.000	0.722		100.00	0.000	0.000
						C	0.000	0.722		100.00	0.000	0.000
L5 144.0000-139.0000	141.4787	1.362	7.69	1.4748	9.160	A	0.000	9.160	9.160	100.00	0.000	0.000
						B	0.000	9.160		100.00	0.000	0.000
						C	0.000	9.160		100.00	0.000	0.000
L6 139.0000-134.0000	136.4798	1.351	7.63	1.4695	9.563	A	0.000	9.563	9.563	100.00	0.000	0.000
						B	0.000	9.563		100.00	0.000	0.000
						C	0.000	9.563		100.00	0.000	0.000
L7 134.0000-129.0000	131.4807	1.341	7.57	1.4640	9.965	A	0.000	9.965	9.965	100.00	0.000	0.000
						B	0.000	9.965		100.00	0.000	0.861
						C	0.000	9.965		100.00	0.000	0.000
L8 129.0000-128.2500	128.6246	1.334	7.54	1.4608	1.530	A	0.000	1.530	1.530	100.00	0.000	0.000
						B	0.000	1.530		100.00	0.000	0.368
						C	0.000	1.530		100.00	0.000	0.000
L9 128.2500-128.0000	128.1250	1.333	7.53	1.4602	0.509	A	0.000	0.509	0.509	100.00	0.000	0.000
						B	0.000	0.509		100.00	0.000	0.123
						C	0.000	0.509		100.00	0.000	0.000
L10 128.0000-123.0000	125.4817	1.328	7.50	1.4572	10.402	A	0.000	10.402	10.402	100.00	0.000	0.000
						B	0.000	10.402		100.00	0.000	2.452
						C	0.000	10.402		100.00	0.000	0.000
L11 123.0000-118.0000	120.4825	1.316	7.43	1.4513	10.806	A	0.000	10.806	10.806	100.00	0.000	0.000
						B	0.000	10.806		100.00	0.000	2.446
						C	0.000	10.806		100.00	0.000	0.000
L12 118.0000-113.0000	115.4832	1.305	7.37	1.4451	11.212	A	0.000	11.212	11.212	100.00	0.000	0.000
						B	0.000	11.212		100.00	0.000	2.439
						C	0.000	11.212		100.00	0.000	0.000
L13 113.0000-108.0000	110.4838	1.292	7.30	1.4388	11.615	A	0.000	11.615	11.615	100.00	0.000	0.000
						B	0.000	11.615		100.00	0.000	2.432
						C	0.000	11.615		100.00	0.000	0.000
L14 108.0000-103.0000	105.4844	1.28	7.23	1.4321	12.018	A	0.000	12.018	12.018	100.00	0.000	0.000
						B	0.000	12.018		100.00	0.000	2.425
						C	0.000	12.018		100.00	0.000	0.000
L15 103.0000-98.0000	100.4850	1.267	7.15	1.4252	12.421	A	0.000	12.421	12.421	100.00	0.000	0.000
						B	0.000	12.421		100.00	0.000	2.528
						C	0.000	12.421		100.00	0.000	0.000
L16 98.0000-	95.4855	1.253	7.08	1.4179	12.822	A	0.000	12.822	12.822	100.00	0.000	0.000

Section Elevation	z	K _z	q _z	t _z	A _G	F a c e	A _F	A _R	A _{leg}	Leg %	C _A A _A In Face ft ²	C _A A _A Out Face ft ²
ft	ft		psf	in	ft ²		ft ²	ft ²	ft ²		ft ²	ft ²
93.0000						B	0.000	12.822		100.00	0.000	2.617
						C	0.000	12.822		100.00	0.000	0.000
L17 93.0000- 92.0000	92.4994	1.245	7.03	1.4134	2.564	A	0.000	2.564	2.564	100.00	0.000	0.000
						B	0.000	2.564		100.00	0.000	0.523
						C	0.000	2.564		100.00	0.000	0.000
L18 92.0000- 87.0000	89.4858	1.236	6.98	1.4088	13.060	A	0.000	13.060	13.060	100.00	0.000	0.000
						B	0.000	13.060		100.00	0.000	2.607
						C	0.000	13.060		100.00	0.000	0.000
L19 87.0000- 82.0000	84.4863	1.221	6.90	1.4007	13.464	A	0.000	13.464	13.464	100.00	0.000	0.000
						B	0.000	13.464		100.00	0.000	2.598
						C	0.000	13.464		100.00	0.000	0.000
L20 82.0000- 77.5000	79.7392	1.207	6.81	1.3926	12.461	A	0.000	12.461	12.461	100.00	0.000	0.000
						B	0.000	12.461		100.00	0.000	2.330
						C	0.000	12.461		100.00	0.000	0.000
L21 77.5000- 72.5000	74.9871	1.191	6.73	1.3841	14.218	A	0.000	14.218	14.218	100.00	0.000	0.000
						B	0.000	14.218		100.00	0.000	2.580
						C	0.000	14.218		100.00	0.000	0.000
L22 72.5000- 70.5800	71.5381	1.179	6.66	1.3776	5.566	A	0.000	5.566	5.566	100.00	0.000	0.000
						B	0.000	5.566		100.00	0.000	0.988
						C	0.000	5.566		100.00	0.000	0.000
L23 70.5800- 70.3300	70.4550	1.176	6.64	1.3755	0.729	A	0.000	0.729	0.729	100.00	0.000	0.000
						B	0.000	0.729		100.00	0.000	0.128
						C	0.000	0.729		100.00	0.000	0.000
L24 70.3300- 67.0800	68.6998	1.169	6.60	1.3720	9.570	A	0.000	9.570	9.570	100.00	0.000	0.000
						B	0.000	9.570		100.00	0.000	1.668
						C	0.000	9.570		100.00	0.000	0.000
L25 67.0800- 66.8300	66.9550	1.163	6.57	1.3685	0.741	A	0.000	0.741	0.741	100.00	0.000	0.000
						B	0.000	0.741		100.00	0.000	0.128
						C	0.000	0.741		100.00	0.000	0.000
L26 66.8300- 61.8300	64.3179	1.153	6.51	1.3630	15.031	A	0.000	15.031	15.031	100.00	0.000	0.000
						B	0.000	15.031		100.00	0.000	4.475
						C	0.000	15.031		100.00	0.000	0.000
L27 61.8300- 57.5000	59.6562	1.135	6.41	1.3528	13.338	A	0.000	13.338	13.338	100.00	0.000	0.000
						B	0.000	13.338		100.00	0.000	4.408
						C	0.000	13.338		100.00	0.000	0.000
L28 57.5000- 56.7500	57.1247	1.125	6.35	1.3469	2.301	A	0.000	2.301	2.301	100.00	0.000	0.000
						B	0.000	2.301		100.00	0.000	0.763
						C	0.000	2.301		100.00	0.000	0.000
L29 56.7500- 51.7500	54.2384	1.113	6.28	1.3400	15.568	A	0.000	15.568	15.568	100.00	0.000	0.000
						B	0.000	15.568		100.00	0.000	5.061
						C	0.000	15.568		100.00	0.000	0.000
L30 51.7500- 46.7500	49.2387	1.09	6.16	1.3271	15.966	A	0.000	15.966	15.966	100.00	0.000	0.000
						B	0.000	15.966		100.00	0.000	5.032
						C	0.000	15.966		100.00	0.000	0.000
L31 46.7500- 41.7500	44.2390	1.066	6.02	1.3129	16.363	A	0.000	16.363	16.363	100.00	0.000	0.000
						B	0.000	16.363		100.00	0.000	5.001
						C	0.000	16.363		100.00	0.000	0.000
L32 41.7500- 39.8000	40.7734	1.048	5.92	1.3023	6.489	A	0.000	6.489	6.489	100.00	0.000	0.000
						B	0.000	6.489		100.00	0.000	1.941
						C	0.000	6.489		100.00	0.000	0.000
L33 39.8000- 39.3300	39.5649	1.041	5.88	1.2983	1.572	A	0.000	1.572	1.572	100.00	0.000	0.000
						B	0.000	1.572		100.00	0.000	0.467
						C	0.000	1.572		100.00	0.000	0.000
L34 39.3300- 39.0800	39.2050	1.039	5.87	1.2972	0.838	A	0.000	0.838	0.838	100.00	0.000	0.000
						B	0.000	0.838		100.00	0.000	0.248
						C	0.000	0.838		100.00	0.000	0.000
L35 39.0800- 38.3300	38.7048	1.036	5.85	1.2955	2.519	A	0.000	2.519	2.519	100.00	0.000	0.000
						B	0.000	2.519		100.00	0.000	0.744
						C	0.000	2.519		100.00	0.000	0.000
L36 38.3300- 38.0800	38.2050	1.034	5.84	1.2938	0.842	A	0.000	0.842	0.842	100.00	0.000	0.000
						B	0.000	0.842		100.00	0.000	0.248
						C	0.000	0.842		100.00	0.000	0.000
L37 38.0800- 33.0800	35.5695	1.018	5.75	1.2846	17.047	A	0.000	17.047	17.047	100.00	0.000	0.000
						B	0.000	17.047		100.00	0.000	4.938

Section Elevation ft	z ft	K_z	q_z psf	t_z in	A_G ft ²	F a c e	A_F ft ²	A_R ft ²	A_{leg} ft ²	Leg %	C_{AA} In Face ft ²	C_{AA} Out Face ft ²
L38 33.0800-30.7500	31.9128	0.995	5.62	1.2707	8.078	C	0.000	17.047		100.00	0.000	0.000
						A	0.000	8.078	8.078	100.00	0.000	0.000
						B	0.000	8.078		100.00	0.000	2.287
						C	0.000	8.078		100.00	0.000	0.000
L39 30.7500-30.5000	30.6250	0.987	5.57	1.2655	0.871	A	0.000	0.871	0.871	100.00	0.000	0.000
						B	0.000	0.871		100.00	0.000	0.245
						C	0.000	0.871		100.00	0.000	0.000
L40 30.5000-25.5000	27.9899	0.968	5.47	1.2542	17.632	A	0.000	17.632	17.632	100.00	0.000	0.000
						B	0.000	17.632		100.00	0.000	4.870
						C	0.000	17.632		100.00	0.000	0.000
L41 25.5000-20.5000	22.9901	0.929	5.24	1.2297	18.022	A	0.000	18.022	18.022	100.00	0.000	0.000
						B	0.000	18.022		100.00	0.000	4.816
						C	0.000	18.022		100.00	0.000	0.000
L42 20.5000-15.5000	17.9903	0.882	4.98	1.1999	18.406	A	0.000	18.406	18.406	100.00	0.000	0.000
						B	0.000	18.406		100.00	0.000	4.750
						C	0.000	18.406		100.00	0.000	0.000
L43 15.5000-9.8000	12.6377	0.85	4.80	1.1583	21.440	A	0.000	21.440	21.440	100.00	0.000	0.000
						B	0.000	21.440		100.00	0.000	5.309
						C	0.000	21.440		100.00	0.000	0.000
L44 9.8000-8.8000	9.2996	0.85	4.80	1.1233	3.752	A	0.000	3.752	3.752	100.00	0.000	0.000
						B	0.000	3.752		100.00	0.000	0.931
						C	0.000	3.752		100.00	0.000	0.000
L45 8.8000-8.2500	8.5249	0.85	4.80	1.1136	2.066	A	0.000	2.066	2.066	100.00	0.000	0.000
						B	0.000	2.066		100.00	0.000	0.501
						C	0.000	2.066		100.00	0.000	0.000
L46 8.2500-8.0000	8.1250	0.85	4.80	1.1083	0.941	A	0.000	0.941	0.941	100.00	0.000	0.000
						B	0.000	0.941		100.00	0.000	0.227
						C	0.000	0.941		100.00	0.000	0.000
L47 8.0000-4.2500	6.1198	0.85	4.80	1.0773	14.212	A	0.000	14.212	14.212	100.00	0.000	0.000
						B	0.000	14.212		100.00	0.000	3.358
						C	0.000	14.212		100.00	0.000	0.000
L48 4.2500-4.0000	4.1250	0.85	4.80	1.0356	0.953	A	0.000	0.953	0.953	100.00	0.000	0.000
						B	0.000	0.953		100.00	0.000	0.219
						C	0.000	0.953		100.00	0.000	0.000
L49 4.0000-3.0000	3.4996	0.85	4.80	1.0187	3.818	A	0.000	3.818	3.818	100.00	0.000	0.000
						B	0.000	3.818		100.00	0.000	0.869
						C	0.000	3.818		100.00	0.000	0.000
L50 3.0000-2.7500	2.8750	0.85	4.80	0.9989	0.955	A	0.000	0.955	0.955	100.00	0.000	0.000
						B	0.000	0.955		100.00	0.000	0.215
						C	0.000	0.955		100.00	0.000	0.000
L51 2.7500-0.0000	1.3722	0.85	4.80	0.9277	10.546	A	0.000	10.546	10.546	100.00	0.000	0.000
						B	0.000	10.546		100.00	0.000	2.280
						C	0.000	10.546		100.00	0.000	0.000

Tower Pressure - Service

$G_H = 1.100$

Section Elevation ft	z ft	K_z	q_z psf	A_G ft ²	F a c e	A_F ft ²	A_R ft ²	A_{leg} ft ²	Leg %	C_{AA} In Face ft ²	C_{AA} Out Face ft ²
L1 156.0000-151.0000	153.5000	1.385	10.08	4.479	A	0.000	4.479	4.479	100.00	0.000	0.000
					B	0.000	4.479		100.00	0.000	0.000
					C	0.000	4.479		100.00	0.000	0.000
L2 151.0000-146.0000	148.5000	1.375	10.01	4.479	A	0.000	4.479	4.479	100.00	0.000	0.000
					B	0.000	4.479		100.00	0.000	0.000
					C	0.000	4.479		100.00	0.000	0.000
L3 146.0000-	145.2500	1.369	9.96	1.344	A	0.000	1.344	1.344	100.00	0.000	0.000

Section Elevation	z	K _Z	q _z	A _G	F a c e	A _F	A _R	A _{leg}	Leg %	C _A A _A In Face ft ²	C _A A _A Out Face ft ²
ft	ft		psf	ft ²		ft ²	ft ²	ft ²			
144.5000					B	0.000	1.344		100.00	0.000	0.000
					C	0.000	1.344		100.00	0.000	0.000
L4 144.5000-	144.2290	1.367	9.95	0.599	A	0.000	0.599	0.599	100.00	0.000	0.000
144.0000					B	0.000	0.599		100.00	0.000	0.000
					C	0.000	0.599		100.00	0.000	0.000
L5 144.0000-	141.4787	1.362	9.91	7.931	A	0.000	7.931	7.931	100.00	0.000	0.000
139.0000					B	0.000	7.931		100.00	0.000	0.000
					C	0.000	7.931		100.00	0.000	0.000
L6 139.0000-	136.4798	1.351	9.83	8.338	A	0.000	8.338	8.338	100.00	0.000	0.000
134.0000					B	0.000	8.338		100.00	0.000	0.000
					C	0.000	8.338		100.00	0.000	0.000
L7 134.0000-	131.4807	1.341	9.76	8.745	A	0.000	8.745	8.745	100.00	0.000	0.000
129.0000					B	0.000	8.745		100.00	0.000	0.292
					C	0.000	8.745		100.00	0.000	0.000
L8 129.0000-	128.6246	1.334	9.71	1.347	A	0.000	1.347	1.347	100.00	0.000	0.000
128.2500					B	0.000	1.347		100.00	0.000	0.125
					C	0.000	1.347		100.00	0.000	0.000
L9 128.2500-	128.1250	1.333	9.70	0.449	A	0.000	0.449	0.449	100.00	0.000	0.000
128.0000					B	0.000	0.449		100.00	0.000	0.042
					C	0.000	0.449		100.00	0.000	0.000
L10	125.4817	1.328	9.66	9.188	A	0.000	9.188	9.188	100.00	0.000	0.000
128.0000-					B	0.000	9.188		100.00	0.000	0.833
123.0000					C	0.000	9.188		100.00	0.000	0.000
L11	120.4825	1.316	9.58	9.597	A	0.000	9.597	9.597	100.00	0.000	0.000
123.0000-					B	0.000	9.597		100.00	0.000	0.833
118.0000					C	0.000	9.597		100.00	0.000	0.000
L12	115.4832	1.305	9.49	10.007	A	0.000	10.007	10.007	100.00	0.000	0.000
118.0000-					B	0.000	10.007		100.00	0.000	0.833
113.0000					C	0.000	10.007		100.00	0.000	0.000
L13	110.4838	1.292	9.40	10.416	A	0.000	10.416	10.416	100.00	0.000	0.000
113.0000-					B	0.000	10.416		100.00	0.000	0.833
108.0000					C	0.000	10.416		100.00	0.000	0.000
L14	105.4844	1.28	9.31	10.825	A	0.000	10.825	10.825	100.00	0.000	0.000
108.0000-					B	0.000	10.825		100.00	0.000	0.833
103.0000					C	0.000	10.825		100.00	0.000	0.000
L15	100.4850	1.267	9.22	11.233	A	0.000	11.233	11.233	100.00	0.000	0.000
103.0000-					B	0.000	11.233		100.00	0.000	0.944
98.0000					C	0.000	11.233		100.00	0.000	0.000
L16 98.0000-	95.4855	1.253	9.12	11.641	A	0.000	11.641	11.641	100.00	0.000	0.000
93.0000					B	0.000	11.641		100.00	0.000	1.042
					C	0.000	11.641		100.00	0.000	0.000
L17 93.0000-	92.4994	1.245	9.06	2.328	A	0.000	2.328	2.328	100.00	0.000	0.000
92.0000					B	0.000	2.328		100.00	0.000	0.208
					C	0.000	2.328		100.00	0.000	0.000
L18 92.0000-	89.4858	1.236	9.00	11.886	A	0.000	11.886	11.886	100.00	0.000	0.000
87.0000					B	0.000	11.886		100.00	0.000	1.042
					C	0.000	11.886		100.00	0.000	0.000
L19 87.0000-	84.4863	1.221	8.89	12.297	A	0.000	12.297	12.297	100.00	0.000	0.000
82.0000					B	0.000	12.297		100.00	0.000	1.042
					C	0.000	12.297		100.00	0.000	0.000
L20 82.0000-	79.7392	1.207	8.78	11.417	A	0.000	11.417	11.417	100.00	0.000	0.000
77.5000					B	0.000	11.417		100.00	0.000	0.937
					C	0.000	11.417		100.00	0.000	0.000
L21 77.5000-	74.9871	1.191	8.67	13.065	A	0.000	13.065	13.065	100.00	0.000	0.000
72.5000					B	0.000	13.065		100.00	0.000	1.042
					C	0.000	13.065		100.00	0.000	0.000
L22 72.5000-	71.5381	1.179	8.58	5.125	A	0.000	5.125	5.125	100.00	0.000	0.000
70.5800					B	0.000	5.125		100.00	0.000	0.400
					C	0.000	5.125		100.00	0.000	0.000
L23 70.5800-	70.4550	1.176	8.55	0.672	A	0.000	0.672	0.672	100.00	0.000	0.000
70.3300					B	0.000	0.672		100.00	0.000	0.052
					C	0.000	0.672		100.00	0.000	0.000
L24 70.3300-	68.6998	1.169	8.51	8.826	A	0.000	8.826	8.826	100.00	0.000	0.000
67.0800					B	0.000	8.826		100.00	0.000	0.677

Section Elevation	z	K _Z	q _z	A _G	F a c e	A _F	A _R	A _{leg}	Leg %	C _A A _A In Face ft ²	C _A A _A Out Face ft ²
ft	ft		psf	ft ²		ft ²	ft ²	ft ²			
L25 67.0800- 66.8300	66.9550	1.163	8.46	0.684	C	0.000	8.826		100.00	0.000	0.000
					A	0.000	0.684	0.684	100.00	0.000	0.000
					B	0.000	0.684		100.00	0.000	0.052
					C	0.000	0.684		100.00	0.000	0.000
L26 66.8300- 61.8300	64.3179	1.153	8.39	13.895	A	0.000	13.895	13.895	100.00	0.000	0.000
					B	0.000	13.895		100.00	0.000	1.824
					C	0.000	13.895		100.00	0.000	0.000
L27 61.8300- 57.5000	59.6562	1.135	8.26	12.362	A	0.000	12.362	12.362	100.00	0.000	0.000
					B	0.000	12.362		100.00	0.000	1.804
					C	0.000	12.362		100.00	0.000	0.000
L28 57.5000- 56.7500	57.1247	1.125	8.18	2.132	A	0.000	2.132	2.132	100.00	0.000	0.000
					B	0.000	2.132		100.00	0.000	0.312
					C	0.000	2.132		100.00	0.000	0.000
L29 56.7500- 51.7500	54.2384	1.113	8.10	14.451	A	0.000	14.451	14.451	100.00	0.000	0.000
					B	0.000	14.451		100.00	0.000	2.083
					C	0.000	14.451		100.00	0.000	0.000
L30 51.7500- 46.7500	49.2387	1.09	7.93	14.860	A	0.000	14.860	14.860	100.00	0.000	0.000
					B	0.000	14.860		100.00	0.000	2.083
					C	0.000	14.860		100.00	0.000	0.000
L31 46.7500- 41.7500	44.2390	1.066	7.76	15.269	A	0.000	15.269	15.269	100.00	0.000	0.000
					B	0.000	15.269		100.00	0.000	2.083
					C	0.000	15.269		100.00	0.000	0.000
L32 41.7500- 39.8000	40.7734	1.048	7.62	6.066	A	0.000	6.066	6.066	100.00	0.000	0.000
					B	0.000	6.066		100.00	0.000	0.812
					C	0.000	6.066		100.00	0.000	0.000
L33 39.8000- 39.3300	39.5649	1.041	7.58	1.470	A	0.000	1.470	1.470	100.00	0.000	0.000
					B	0.000	1.470		100.00	0.000	0.196
					C	0.000	1.470		100.00	0.000	0.000
L34 39.3300- 39.0800	39.2050	1.039	7.56	0.784	A	0.000	0.784	0.784	100.00	0.000	0.000
					B	0.000	0.784		100.00	0.000	0.104
					C	0.000	0.784		100.00	0.000	0.000
L35 39.0800- 38.3300	38.7048	1.036	7.54	2.357	A	0.000	2.357	2.357	100.00	0.000	0.000
					B	0.000	2.357		100.00	0.000	0.312
					C	0.000	2.357		100.00	0.000	0.000
L36 38.3300- 38.0800	38.2050	1.034	7.52	0.788	A	0.000	0.788	0.788	100.00	0.000	0.000
					B	0.000	0.788		100.00	0.000	0.104
					C	0.000	0.788		100.00	0.000	0.000
L37 38.0800- 33.0800	35.5695	1.018	7.41	15.977	A	0.000	15.977	15.977	100.00	0.000	0.000
					B	0.000	15.977		100.00	0.000	2.083
					C	0.000	15.977		100.00	0.000	0.000
L38 33.0800- 30.7500	31.9128	0.995	7.24	7.585	A	0.000	7.585	7.585	100.00	0.000	0.000
					B	0.000	7.585		100.00	0.000	0.971
					C	0.000	7.585		100.00	0.000	0.000
L39 30.7500- 30.5000	30.6250	0.987	7.18	0.819	A	0.000	0.819	0.819	100.00	0.000	0.000
					B	0.000	0.819		100.00	0.000	0.104
					C	0.000	0.819		100.00	0.000	0.000
L40 30.5000- 25.5000	27.9899	0.968	7.04	16.586	A	0.000	16.586	16.586	100.00	0.000	0.000
					B	0.000	16.586		100.00	0.000	2.083
					C	0.000	16.586		100.00	0.000	0.000
L41 25.5000- 20.5000	22.9901	0.929	6.76	16.997	A	0.000	16.997	16.997	100.00	0.000	0.000
					B	0.000	16.997		100.00	0.000	2.083
					C	0.000	16.997		100.00	0.000	0.000
L42 20.5000- 15.5000	17.9903	0.882	6.42	17.406	A	0.000	17.406	17.406	100.00	0.000	0.000
					B	0.000	17.406		100.00	0.000	2.083
					C	0.000	17.406		100.00	0.000	0.000
L43 15.5000- 9.8000	12.6377	0.85	6.18	20.339	A	0.000	20.339	20.339	100.00	0.000	0.000
					B	0.000	20.339		100.00	0.000	2.375
					C	0.000	20.339		100.00	0.000	0.000
L44 9.8000- 8.8000	9.2996	0.85	6.18	3.559	A	0.000	3.559	3.559	100.00	0.000	0.000
					B	0.000	3.559		100.00	0.000	0.417
					C	0.000	3.559		100.00	0.000	0.000
L45 8.8000- 8.2500	8.5249	0.85	6.18	1.964	A	0.000	1.964	1.964	100.00	0.000	0.000
					B	0.000	1.964		100.00	0.000	0.229
					C	0.000	1.964		100.00	0.000	0.000

Section Elevation ft	z ft	K_z	q_z psf	A_G ft ²	F a c e	A_F ft ²	A_R ft ²	A_{leg} ft ²	Leg %	$C_A A_A$ In Face ft ²	$C_A A_A$ Out Face ft ²
L46 8.2500- 8.0000	8.1250	0.85	6.18	0.894	A	0.000	0.894	0.894	100.00	0.000	0.000
					B	0.000	0.894	100.00	0.000	0.104	
					C	0.000	0.894	100.00	0.000	0.000	
L47 8.0000- 4.2500	6.1198	0.85	6.18	13.538	A	0.000	13.538	13.538	100.00	0.000	0.000
					B	0.000	13.538	100.00	0.000	1.562	
					C	0.000	13.538	100.00	0.000	0.000	
L48 4.2500- 4.0000	4.1250	0.85	6.18	0.909	A	0.000	0.909	0.909	100.00	0.000	0.000
					B	0.000	0.909	100.00	0.000	0.104	
					C	0.000	0.909	100.00	0.000	0.000	
L49 4.0000- 3.0000	3.4996	0.85	6.18	3.648	A	0.000	3.648	3.648	100.00	0.000	0.000
					B	0.000	3.648	100.00	0.000	0.417	
					C	0.000	3.648	100.00	0.000	0.000	
L50 3.0000- 2.7500	2.8750	0.85	6.18	0.914	A	0.000	0.914	0.914	100.00	0.000	0.000
					B	0.000	0.914	100.00	0.000	0.104	
					C	0.000	0.914	100.00	0.000	0.000	
L51 2.7500- 0.0000	1.3722	0.85	6.18	10.120	A	0.000	10.120	10.120	100.00	0.000	0.000
					B	0.000	10.120	100.00	0.000	1.146	
					C	0.000	10.120	100.00	0.000	0.000	

Load Combinations

Comb. No.	Description
1	Dead Only
2	1.2 Dead+1.0 Wind 0 deg - No Ice
3	0.9 Dead+1.0 Wind 0 deg - No Ice
4	1.2 Dead+1.0 Wind 30 deg - No Ice
5	0.9 Dead+1.0 Wind 30 deg - No Ice
6	1.2 Dead+1.0 Wind 60 deg - No Ice
7	0.9 Dead+1.0 Wind 60 deg - No Ice
8	1.2 Dead+1.0 Wind 90 deg - No Ice
9	0.9 Dead+1.0 Wind 90 deg - No Ice
10	1.2 Dead+1.0 Wind 120 deg - No Ice
11	0.9 Dead+1.0 Wind 120 deg - No Ice
12	1.2 Dead+1.0 Wind 150 deg - No Ice
13	0.9 Dead+1.0 Wind 150 deg - No Ice
14	1.2 Dead+1.0 Wind 180 deg - No Ice
15	0.9 Dead+1.0 Wind 180 deg - No Ice
16	1.2 Dead+1.0 Wind 210 deg - No Ice
17	0.9 Dead+1.0 Wind 210 deg - No Ice
18	1.2 Dead+1.0 Wind 240 deg - No Ice
19	0.9 Dead+1.0 Wind 240 deg - No Ice
20	1.2 Dead+1.0 Wind 270 deg - No Ice
21	0.9 Dead+1.0 Wind 270 deg - No Ice
22	1.2 Dead+1.0 Wind 300 deg - No Ice
23	0.9 Dead+1.0 Wind 300 deg - No Ice
24	1.2 Dead+1.0 Wind 330 deg - No Ice
25	0.9 Dead+1.0 Wind 330 deg - No Ice
26	1.2 Dead+1.0 Ice+1.0 Temp
27	1.2 Dead+1.0 Wind 0 deg+1.0 Ice+1.0 Temp
28	1.2 Dead+1.0 Wind 30 deg+1.0 Ice+1.0 Temp
29	1.2 Dead+1.0 Wind 60 deg+1.0 Ice+1.0 Temp
30	1.2 Dead+1.0 Wind 90 deg+1.0 Ice+1.0 Temp
31	1.2 Dead+1.0 Wind 120 deg+1.0 Ice+1.0 Temp
32	1.2 Dead+1.0 Wind 150 deg+1.0 Ice+1.0 Temp
33	1.2 Dead+1.0 Wind 180 deg+1.0 Ice+1.0 Temp
34	1.2 Dead+1.0 Wind 210 deg+1.0 Ice+1.0 Temp
35	1.2 Dead+1.0 Wind 240 deg+1.0 Ice+1.0 Temp
36	1.2 Dead+1.0 Wind 270 deg+1.0 Ice+1.0 Temp
37	1.2 Dead+1.0 Wind 300 deg+1.0 Ice+1.0 Temp
38	1.2 Dead+1.0 Wind 330 deg+1.0 Ice+1.0 Temp

Comb. No.	Description
39	Dead+Wind 0 deg - Service
40	Dead+Wind 30 deg - Service
41	Dead+Wind 60 deg - Service
42	Dead+Wind 90 deg - Service
43	Dead+Wind 120 deg - Service
44	Dead+Wind 150 deg - Service
45	Dead+Wind 180 deg - Service
46	Dead+Wind 210 deg - Service
47	Dead+Wind 240 deg - Service
48	Dead+Wind 270 deg - Service
49	Dead+Wind 300 deg - Service
50	Dead+Wind 330 deg - Service

Maximum Member Forces

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L1	156 - 151	Pole	Max Tension	39	0.00	0.00	-0.00
			Max. Compression	26	-1.09	1.38	0.81
			Max. Mx	20	-0.46	3.20	-0.08
			Max. My	2	-0.44	0.11	3.37
			Max. Vy	20	-0.91	3.20	-0.08
			Max. Vx	2	-1.04	0.11	3.37
			Max. Torque	4			1.16
L2	151 - 146	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-5.53	-0.84	4.68
			Max. Mx	8	-2.18	-22.57	2.60
			Max. My	2	-2.12	-1.15	26.31
			Max. Vy	8	4.70	-22.57	2.60
			Max. Vx	2	-5.08	-1.15	26.31
			Max. Torque	8			2.71
L3	146 - 144.5	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-5.65	-0.84	4.68
			Max. Mx	8	-2.26	-29.66	2.69
			Max. My	2	-2.21	-1.23	33.97
			Max. Vy	8	4.76	-29.66	2.69
			Max. Vx	2	-5.13	-1.23	33.97
			Max. Torque	8			2.71
L4	144.5 - 144	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-5.70	-0.84	4.69
			Max. Mx	8	-2.30	-32.05	2.71
			Max. My	2	-2.25	-1.25	36.55
			Max. Vy	8	4.78	-32.05	2.71
			Max. Vx	2	-5.16	-1.25	36.55
			Max. Torque	8			2.71
L5	144 - 139	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-14.84	-0.86	4.74
			Max. Mx	8	-6.36	-85.22	3.01
			Max. My	2	-6.29	-1.52	91.67
			Max. Vy	8	12.27	-85.22	3.01
			Max. Vx	2	-12.67	-1.52	91.67
			Max. Torque	8			2.71
L6	139 - 134	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-15.52	-0.87	4.80
			Max. Mx	8	-6.85	-147.75	3.30
			Max. My	2	-6.78	-1.79	156.15
			Max. Vy	8	12.74	-147.75	3.30
			Max. Vx	2	-13.13	-1.79	156.15
			Max. Torque	8			2.71
L7	134 - 129	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-16.23	-0.88	4.84
			Max. Mx	8	-7.38	-212.67	3.58

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L8	129 - 128.25	Pole	Max. My	2	-7.32	-2.06	223.02
			Max. Vy	8	13.23	-212.67	3.58
			Max. Vx	2	-13.62	-2.06	223.02
			Max. Torque	8			2.71
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-16.34	-0.89	4.84
			Max. Mx	8	-7.46	-222.63	3.62
			Max. My	2	-7.40	-2.10	233.27
			Max. Vy	8	13.31	-222.63	3.62
			Max. Vx	2	-13.70	-2.10	233.27
L9	128.25 - 128	Pole	Max. Torque	8			2.70
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-16.39	-0.89	4.85
			Max. Mx	8	-7.51	-225.96	3.64
			Max. My	2	-7.45	-2.11	236.69
			Max. Vy	8	13.34	-225.96	3.64
			Max. Vx	2	-13.73	-2.11	236.69
			Max. Torque	8			2.70
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-17.48	-0.90	4.88
L10	128 - 123	Pole	Max. Mx	8	-8.39	-294.09	3.91
			Max. My	2	-8.32	-2.38	306.78
			Max. Vy	8	13.92	-294.09	3.91
			Max. Vx	2	-14.31	-2.38	306.78
			Max. Torque	8			2.70
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-23.11	-1.72	4.45
			Max. Mx	8	-11.86	-370.05	4.14
			Max. My	2	-11.80	-2.65	384.51
			Max. Vy	8	16.91	-370.05	4.14
L11	123 - 118	Pole	Max. Vx	2	-17.29	-2.65	384.51
			Max. Torque	8			2.68
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-24.25	-1.74	4.49
			Max. Mx	8	-12.80	-456.03	4.34
			Max. My	2	-12.74	-2.84	472.39
			Max. Vy	8	17.50	-456.03	4.34
			Max. Vx	2	-17.88	-2.84	472.39
			Max. Torque	22			-2.46
			Max Tension	1	0.00	0.00	0.00
L12	118 - 113	Pole	Max. Compression	26	-25.41	-1.75	4.52
			Max. Mx	8	-13.76	-544.96	4.54
			Max. My	2	-13.70	-3.03	563.21
			Max. Vy	8	18.09	-544.96	4.54
			Max. Vx	2	-18.47	-3.03	563.21
			Max. Torque	22			-2.46
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-26.60	-1.76	4.55
			Max. Mx	8	-14.75	-636.85	4.74
			Max. My	2	-14.70	-3.22	656.99
L13	113 - 108	Pole	Max. Vy	8	18.68	-636.85	4.74
			Max. Vx	2	-19.06	-3.22	656.99
			Max. Torque	22			-2.46
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-27.81	-1.77	4.58
			Max. Mx	8	-15.76	-731.73	4.93
			Max. My	2	-15.71	-3.40	753.77
			Max. Vy	8	19.29	-731.73	4.93
			Max. Vx	2	-19.67	-3.40	753.77
			Max. Torque	22			-2.46
L14	108 - 103	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-28.17	-1.78	4.59
			Max. Mx	8	-16.07	-760.79	4.99
			Max. My	2	-16.02	-3.45	783.39
			Max. Vy	8	19.47	-760.79	4.99

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L17	93 - 92	Pole	Max. Vx	2	-19.85	-3.45	783.39
			Max. Torque	22			-2.46
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-30.28	-1.79	4.61
			Max. Mx	8	-17.79	-849.83	5.17
			Max. My	2	-17.74	-3.62	874.13
			Max. Vy	8	20.10	-849.83	5.17
L18	92 - 87	Pole	Max. Vx	2	-20.48	-3.62	874.13
			Max. Torque	22			-2.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-31.81	-1.80	4.64
			Max. Mx	8	-19.10	-951.89	5.36
			Max. My	2	-19.05	-3.80	978.08
			Max. Vy	8	20.74	-951.89	5.36
L19	87 - 82	Pole	Max. Vx	2	-21.12	-3.80	978.08
			Max. Torque	22			-2.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-33.35	-1.80	4.66
			Max. Mx	8	-20.43	-1057.13	5.55
			Max. My	2	-20.39	-3.99	1085.21
			Max. Vy	8	21.37	-1057.13	5.55
L20	82 - 77.5	Pole	Max. Vx	2	-21.75	-3.99	1085.21
			Max. Torque	22			-2.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-34.77	-1.81	4.68
			Max. Mx	8	-21.66	-1154.56	5.72
			Max. My	2	-21.62	-4.15	1184.34
			Max. Vy	8	21.95	-1154.56	5.72
L21	77.5 - 72.5	Pole	Max. Vx	2	-22.32	-4.15	1184.34
			Max. Torque	22			-2.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-36.48	-1.82	4.70
			Max. Mx	8	-23.15	-1265.85	5.90
			Max. My	2	-23.12	-4.33	1297.51
			Max. Vy	8	22.59	-1265.85	5.90
L22	72.5 - 70.58	Pole	Max. Vx	2	-22.97	-4.33	1297.51
			Max. Torque	22			-2.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-37.15	-1.82	4.70
			Max. Mx	8	-23.73	-1309.45	5.98
			Max. My	2	-23.69	-4.40	1341.83
			Max. Vy	8	22.85	-1309.45	5.98
L23	70.58 - 70.33	Pole	Max. Vx	2	-23.22	-4.40	1341.83
			Max. Torque	22			-2.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-37.23	-1.82	4.70
			Max. Mx	8	-23.82	-1315.16	5.98
			Max. My	2	-23.78	-4.41	1347.64
			Max. Vy	8	22.87	-1315.16	5.98
L24	70.33 - 67.08	Pole	Max. Vx	2	-23.24	-4.41	1347.64
			Max. Torque	22			-2.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-38.37	-1.82	4.70
			Max. Mx	8	-24.80	-1390.14	6.10
			Max. My	2	-24.77	-4.52	1423.84
			Max. Vy	8	23.29	-1390.14	6.10
L25	67.08 - 66.83	Pole	Max. Vx	2	-23.67	-4.52	1423.84
			Max. Torque	22			-2.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-38.48	-1.82	4.70
			Max. Mx	8	-24.91	-1395.96	6.11
			Max. My	2	-24.88	-4.53	1429.76

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L26	66.83 - 61.83	Pole	Max. Vy	8	23.32	-1395.96	6.11
			Max. Vx	2	-23.69	-4.53	1429.76
			Max. Torque	22			-2.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-40.74	-1.82	4.70
			Max. Mx	8	-26.92	-1514.34	6.30
			Max. My	2	-26.89	-4.71	1550.00
			Max. Vy	8	24.04	-1514.34	6.30
			Max. Vx	2	-24.42	-4.71	1550.00
			Max. Torque	22			-2.45
L27	61.83 - 57.5	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-40.78	-1.82	4.71
			Max. Mx	8	-26.96	-1516.26	6.30
			Max. My	2	-26.93	-4.71	1551.95
			Max. Vy	8	24.06	-1516.26	6.30
			Max. Vx	2	-24.44	-4.71	1551.95
			Max. Torque	22			-2.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-44.87	-1.82	4.70
			Max. Mx	8	-30.51	-1638.57	6.49
L28	57.5 - 56.75	Pole	Max. My	2	-30.49	-4.89	1676.14
			Max. Vy	8	24.87	-1638.57	6.49
			Max. Vx	2	-25.24	-4.89	1676.14
			Max. Torque	22			-2.45
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-47.16	-1.82	4.70
			Max. Mx	8	-32.56	-1764.61	6.67
			Max. My	2	-32.54	-5.07	1804.06
			Max. Vy	8	25.57	-1764.61	6.67
			Max. Vx	2	-25.95	-5.07	1804.06
L29	56.75 - 51.75	Pole	Max. Torque	24			-2.51
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-49.47	-1.82	4.70
			Max. Mx	8	-34.64	-1894.13	6.85
			Max. My	2	-34.62	-5.24	1935.45
			Max. Vy	8	26.26	-1894.13	6.85
			Max. Vx	2	-26.64	-5.24	1935.45
			Max. Torque	24			-2.58
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-51.81	-1.82	4.70
L30	51.75 - 46.75	Pole	Max. Mx	8	-36.74	-2027.08	7.03
			Max. My	2	-36.72	-5.42	2070.26
			Max. Vy	8	26.94	-2027.08	7.03
			Max. Vx	2	-27.31	-5.42	2070.26
			Max. Torque	24			-2.65
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-52.74	-1.82	4.70
			Max. Mx	8	-37.56	-2079.85	7.10
			Max. My	2	-37.54	-5.48	2123.76
			Max. Vy	8	27.21	-2079.85	7.10
L31	46.75 - 41.75	Pole	Max. Vx	2	-27.59	-5.48	2123.76
			Max. Torque	24			-2.68
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-52.97	-1.82	4.70
			Max. Mx	8	-37.79	-2092.64	7.12
			Max. My	2	-37.77	-5.50	2136.73
			Max. Vy	8	27.26	-2092.64	7.12
			Max. Vx	2	-27.63	-5.50	2136.73
			Max. Torque	24			-2.68
			Max Tension	1	0.00	0.00	0.00
L32	41.75 - 39.8	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-52.97	-1.82	4.70
			Max. Mx	8	-37.79	-2092.64	7.12
			Max. My	2	-37.77	-5.50	2136.73
			Max. Vy	8	27.26	-2092.64	7.12
			Max. Vx	2	-27.63	-5.50	2136.73
			Max. Torque	24			-2.68
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-52.97	-1.82	4.70
			Max. Mx	8	-37.79	-2092.64	7.12
L33	39.8 - 39.33	Pole	Max. My	2	-37.77	-5.50	2136.73
			Max. Vy	8	27.26	-2092.64	7.12
			Max. Vx	2	-27.63	-5.50	2136.73
			Max. Torque	24			-2.68
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-52.97	-1.82	4.70
			Max. Mx	8	-37.79	-2092.64	7.12
			Max. My	2	-37.77	-5.50	2136.73
			Max. Vy	8	27.26	-2092.64	7.12
			Max. Vx	2	-27.63	-5.50	2136.73
L34	39.33 - 39.08	Pole	Max. Torque	24			-2.68
			Max Tension	1	0.00	0.00	0.00

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L35	39.08 - 38.33	Pole	Max. Compression	26	-53.10	-1.82	4.70
			Max. Mx	8	-37.91	-2099.46	7.13
			Max. My	2	-37.89	-5.51	2143.64
			Max. Vy	8	27.29	-2099.46	7.13
			Max. Vx	2	-27.67	-5.51	2143.64
			Max. Torque	24			-2.69
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-53.48	-1.82	4.70
			Max. Mx	8	-38.25	-2119.97	7.16
			Max. My	2	-38.23	-5.54	2164.42
L36	38.33 - 38.08	Pole	Max. Vy	8	27.40	-2119.97	7.16
			Max. Vx	2	-27.77	-5.54	2164.42
			Max. Torque	24			-2.70
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-53.60	-1.82	4.70
			Max. Mx	8	-38.36	-2126.82	7.16
			Max. My	2	-38.34	-5.54	2171.37
			Max. Vy	8	27.43	-2126.82	7.16
			Max. Vx	2	-27.80	-5.54	2171.37
			Max. Torque	24			-2.70
L37	38.08 - 33.08	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-56.08	-1.82	4.70
			Max. Mx	8	-40.60	-2265.58	7.34
			Max. My	2	-40.58	-5.72	2311.98
			Max. Vy	8	28.09	-2265.58	7.34
			Max. Vx	2	-28.46	-5.72	2311.98
			Max. Torque	24			-2.77
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-57.25	-1.82	4.70
			Max. Mx	8	-41.65	-2331.35	7.42
L38	33.08 - 30.75	Pole	Max. My	2	-41.64	-5.80	2378.61
			Max. Vy	8	28.39	-2331.35	7.42
			Max. Vx	2	-28.76	-5.80	2378.61
			Max. Torque	24			-2.80
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-57.39	-1.82	4.70
			Max. Mx	8	-41.78	-2338.45	7.43
			Max. My	2	-41.77	-5.81	2385.80
			Max. Vy	8	28.42	-2338.45	7.43
			Max. Vx	2	-28.78	-5.81	2385.80
L39	30.75 - 30.5	Pole	Max. Torque	24			-2.81
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-60.06	-1.82	4.70
			Max. Mx	8	-44.21	-2482.09	7.61
			Max. My	2	-44.20	-5.98	2531.28
			Max. Vy	8	29.06	-2482.09	7.61
			Max. Vx	2	-29.43	-5.98	2531.28
			Max. Torque	24			-2.87
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-62.76	-1.82	4.70
L40	30.5 - 25.5	Pole	Max. Mx	8	-46.67	-2628.83	7.78
			Max. My	2	-46.66	-6.15	2679.85
			Max. Vy	8	29.66	-2628.83	7.78
			Max. Vx	2	-30.03	-6.15	2679.85
			Max. Torque	24			-2.94
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-65.47	-1.82	4.70
			Max. Mx	8	-49.15	-2778.50	7.95
			Max. My	2	-49.15	-6.31	2831.34
			Max. Vy	8	30.24	-2778.50	7.95
L41	25.5 - 20.5	Pole	Max. Vx	2	-30.60	-6.31	2831.34
			Max. Compression	26	-65.47	-1.82	4.70
			Max. Mx	8	-49.15	-2778.50	7.95
			Max. My	2	-49.15	-6.31	2831.34
			Max. Vy	8	30.24	-2778.50	7.95
			Max. Vx	2	-30.60	-6.31	2831.34
			Max. Torque	24			-2.94
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-65.47	-1.82	4.70
			Max. Mx	8	-49.15	-2778.50	7.95
L42	20.5 - 15.5	Pole	Max. My	2	-49.15	-6.31	2831.34
			Max. Vy	8	30.24	-2778.50	7.95
			Max. Vx	2	-30.60	-6.31	2831.34
			Max. Torque	24			-2.94
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-65.47	-1.82	4.70
			Max. Mx	8	-49.15	-2778.50	7.95
			Max. My	2	-49.15	-6.31	2831.34
			Max. Vy	8	30.24	-2778.50	7.95
			Max. Vx	2	-30.60	-6.31	2831.34

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L43	15.5 - 9.8	Pole	Max. Torque	24			-3.01
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-65.72	-1.82	4.70
			Max. Mx	8	-49.38	-2792.12	7.97
			Max. My	2	-49.38	-6.33	2845.12
			Max. Vy	8	30.28	-2792.12	7.97
			Max. Vx	2	-30.64	-6.33	2845.12
L44	9.8 - 8.8	Pole	Max. Torque	24			-3.01
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-71.84	-1.82	4.70
			Max. Mx	8	-54.86	-2983.77	8.18
			Max. My	2	-54.85	-6.54	3039.03
			Max. Vy	8	31.06	-2983.77	8.18
			Max. Vx	2	-31.42	-6.54	3039.03
L45	8.8 - 8.25	Pole	Max. Torque	24			-3.09
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-72.14	-1.82	4.70
			Max. Mx	8	-55.14	-3000.85	8.20
			Max. My	2	-55.13	-6.56	3056.31
			Max. Vy	8	31.11	-3000.85	8.20
			Max. Vx	2	-31.47	-6.56	3056.31
L46	8.25 - 8	Pole	Max. Torque	24			-3.10
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-72.29	-1.82	4.70
			Max. Mx	8	-55.28	-3008.63	8.20
			Max. My	2	-55.27	-6.56	3064.18
			Max. Vy	8	31.13	-3008.63	8.20
			Max. Vx	2	-31.49	-6.56	3064.18
L47	8 - 4.25	Pole	Max. Torque	24			-3.10
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-74.46	-1.82	4.70
			Max. Mx	8	-57.29	-3126.08	8.33
			Max. My	2	-57.29	-6.69	3182.97
			Max. Vy	8	31.54	-3126.08	8.33
			Max. Vx	2	-31.90	-6.69	3182.97
L48	4.25 - 4	Pole	Max. Torque	24			-3.15
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-74.62	-1.82	4.70
			Max. Mx	8	-57.45	-3133.96	8.34
			Max. My	2	-57.45	-6.69	3190.95
			Max. Vy	8	31.55	-3133.96	8.34
			Max. Vx	2	-31.91	-6.69	3190.95
L49	4 - 3	Pole	Max. Torque	24			-3.16
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-75.25	-1.82	4.70
			Max. Mx	8	-58.03	-3165.56	8.37
			Max. My	2	-58.03	-6.73	3222.90
			Max. Vy	8	31.67	-3165.56	8.37
			Max. Vx	2	-32.03	-6.73	3222.90
L50	3 - 2.75	Pole	Max. Torque	24			-3.17
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-75.41	-1.82	4.70
			Max. Mx	8	-58.19	-3173.48	8.38
			Max. My	2	-58.19	-6.74	3230.91
			Max. Vy	8	31.69	-3173.48	8.38
			Max. Vx	2	-32.04	-6.74	3230.91
L51	2.75 - 0	Pole	Max. Torque	24			-3.17
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	26	-77.21	-1.82	4.70
			Max. Mx	8	-59.89	-3261.03	8.47
			Max. My	2	-59.89	-6.83	3319.44
			Max. Vy	8	32.01	-3261.03	8.47
			Max. Vx	2	-32.37	-6.83	3319.44
			Max. Torque	24			-3.21

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
-------------	--------------	----------------	-----------	-----------------	---------	--------------------------	--------------------------

Maximum Reactions

Location	Condition	Gov. Load Comb.	Vertical K	Horizontal, X K	Horizontal, Z K
Pole	Max. Vert	26	77.21	0.00	-0.00
	Max. H _x	20	59.90	31.99	-0.03
	Max. H _z	3	44.92	-0.03	32.35
	Max. M _x	2	3319.44	-0.03	32.35
	Max. M _z	8	3261.03	-31.99	0.03
	Max. Torsion	12	3.21	-15.97	-28.00
	Min. Vert	21	44.92	31.99	-0.03
	Min. H _x	9	44.92	-31.99	0.03
	Min. H _z	15	44.92	0.03	-32.35
	Min. M _x	14	-3314.88	0.03	-32.35
	Min. M _z	20	-3259.74	31.99	-0.03
	Min. Torsion	24	-3.21	15.97	28.00

Tower Mast Reaction Summary

Load Combination	Vertical K	Shear _x K	Shear _z K	Overturning Moment, M _x kip-ft	Overturning Moment, M _z kip-ft	Torque kip-ft
Dead Only	49.91	-0.00	0.00	-1.73	-0.49	0.00
1.2 Dead+1.0 Wind 0 deg - No Ice	59.90	0.03	-32.35	-3319.44	-6.83	3.11
0.9 Dead+1.0 Wind 0 deg - No Ice	44.92	0.03	-32.35	-3287.47	-6.58	3.10
1.2 Dead+1.0 Wind 30 deg - No Ice	59.90	16.02	-28.03	-2878.17	-1636.13	2.18
0.9 Dead+1.0 Wind 30 deg - No Ice	44.92	16.02	-28.03	-2850.35	-1620.53	2.19
1.2 Dead+1.0 Wind 60 deg - No Ice	59.90	27.72	-16.20	-1666.30	-2827.28	0.66
0.9 Dead+1.0 Wind 60 deg - No Ice	44.92	27.72	-16.20	-1649.93	-2800.47	0.70
1.2 Dead+1.0 Wind 90 deg - No Ice	59.90	31.99	-0.03	-8.47	-3261.03	-1.03
0.9 Dead+1.0 Wind 90 deg - No Ice	44.92	31.99	-0.03	-7.78	-3230.15	-0.97
1.2 Dead+1.0 Wind 120 deg - No Ice	59.90	27.69	16.15	1651.03	-2821.12	-2.45
0.9 Dead+1.0 Wind 120 deg - No Ice	44.92	27.69	16.15	1636.02	-2794.39	-2.39
1.2 Dead+1.0 Wind 150 deg - No Ice	59.90	15.97	28.00	2867.45	-1625.42	-3.21
0.9 Dead+1.0 Wind 150 deg - No Ice	44.92	15.97	28.00	2840.93	-1609.97	-3.17
1.2 Dead+1.0 Wind 180 deg - No Ice	59.90	-0.03	32.35	3314.88	5.56	-3.11
0.9 Dead+1.0 Wind 180 deg - No Ice	44.92	-0.03	32.35	3284.13	5.64	-3.10
1.2 Dead+1.0 Wind 210 deg - No Ice	59.90	-16.02	28.03	2873.60	1634.85	-2.18
0.9 Dead+1.0 Wind 210 deg - No Ice	44.92	-16.02	28.03	2847.00	1619.60	-2.19

Load Combination	Vertical K	Shear _x K	Shear _z K	Overturning Moment, M _x kip-ft	Overturning Moment, M _z kip-ft	Torque kip-ft
1.2 Dead+1.0 Wind 240 deg - No Ice	59.90	-27.72	16.20	1661.73	2825.99	-0.67
0.9 Dead+1.0 Wind 240 deg - No Ice	44.92	-27.72	16.20	1646.58	2799.53	-0.71
1.2 Dead+1.0 Wind 270 deg - No Ice	59.90	-31.99	0.03	3.91	3259.74	1.03
0.9 Dead+1.0 Wind 270 deg - No Ice	44.92	-31.99	0.03	4.44	3229.19	0.97
1.2 Dead+1.0 Wind 300 deg - No Ice	59.90	-27.69	-16.15	-1655.59	2819.84	2.45
0.9 Dead+1.0 Wind 300 deg - No Ice	44.92	-27.69	-16.15	-1639.36	2793.45	2.39
1.2 Dead+1.0 Wind 330 deg - No Ice	59.90	-15.97	-28.00	-2872.00	1624.15	3.21
0.9 Dead+1.0 Wind 330 deg - No Ice	44.92	-15.97	-28.00	-2844.27	1609.03	3.17
1.2 Dead+1.0 Ice+1.0 Temp	77.21	-0.00	0.00	-4.70	-1.82	0.00
1.2 Dead+1.0 Wind 0 deg+1.0 Ice+1.0 Temp	77.21	0.02	-7.06	-748.06	-4.67	0.99
1.2 Dead+1.0 Wind 30 deg+1.0 Ice+1.0 Temp	77.21	3.51	-6.13	-649.89	-370.13	0.83
1.2 Dead+1.0 Wind 60 deg+1.0 Ice+1.0 Temp	77.21	6.06	-3.55	-378.87	-636.91	0.45
1.2 Dead+1.0 Wind 90 deg+1.0 Ice+1.0 Temp	77.21	6.99	-0.02	-7.64	-733.54	-0.06
1.2 Dead+1.0 Wind 120 deg+1.0 Ice+1.0 Temp	77.21	6.05	3.52	364.35	-634.12	-0.55
1.2 Dead+1.0 Wind 150 deg+1.0 Ice+1.0 Temp	77.21	3.48	6.11	637.42	-365.28	-0.89
1.2 Dead+1.0 Wind 180 deg+1.0 Ice+1.0 Temp	77.21	-0.02	7.06	738.39	0.93	-0.99
1.2 Dead+1.0 Wind 210 deg+1.0 Ice+1.0 Temp	77.21	-3.51	6.13	640.21	366.38	-0.83
1.2 Dead+1.0 Wind 240 deg+1.0 Ice+1.0 Temp	77.21	-6.06	3.55	369.20	633.17	-0.45
1.2 Dead+1.0 Wind 270 deg+1.0 Ice+1.0 Temp	77.21	-6.99	0.02	-2.04	729.79	0.06
1.2 Dead+1.0 Wind 300 deg+1.0 Ice+1.0 Temp	77.21	-6.05	-3.52	-374.02	630.37	0.55
1.2 Dead+1.0 Wind 330 deg+1.0 Ice+1.0 Temp	77.21	-3.48	-6.11	-647.09	361.54	0.89
Dead+Wind 0 deg - Service	49.91	0.01	-6.18	-633.43	-1.70	0.59
Dead+Wind 30 deg - Service	49.91	3.06	-5.36	-549.43	-311.94	0.42
Dead+Wind 60 deg - Service	49.91	5.30	-3.10	-318.69	-538.74	0.13
Dead+Wind 90 deg - Service	49.91	6.11	-0.01	-3.06	-621.29	-0.19
Dead+Wind 120 deg - Service	49.91	5.29	3.09	312.88	-537.56	-0.46
Dead+Wind 150 deg - Service	49.91	3.05	5.35	544.49	-309.91	-0.61
Dead+Wind 180 deg - Service	49.91	-0.01	6.18	629.66	0.64	-0.59
Dead+Wind 210 deg - Service	49.91	-3.06	5.36	545.66	310.87	-0.42
Dead+Wind 240 deg - Service	49.91	-5.30	3.10	314.91	537.67	-0.13
Dead+Wind 270 deg - Service	49.91	-6.11	0.01	-0.71	620.22	0.19
Dead+Wind 300 deg - Service	49.91	-5.29	-3.09	-316.66	536.50	0.46
Dead+Wind 330 deg - Service	49.91	-3.05	-5.35	-548.26	308.84	0.61

Solution Summary

Load Comb.	Sum of Applied Forces			Sum of Reactions			% Error
	PX K	PY K	PZ K	PX K	PY K	PZ K	
1	0.00	-49.91	0.00	0.00	49.91	-0.00	0.002%
2	0.03	-59.90	-32.35	-0.03	59.90	32.35	0.000%
3	0.03	-44.92	-32.35	-0.03	44.92	32.35	0.000%
4	16.02	-59.90	-28.03	-16.02	59.90	28.03	0.000%
5	16.02	-44.92	-28.03	-16.02	44.92	28.03	0.000%
6	27.72	-59.90	-16.20	-27.72	59.90	16.20	0.000%
7	27.72	-44.92	-16.20	-27.72	44.92	16.20	0.000%
8	31.99	-59.90	-0.03	-31.99	59.90	0.03	0.000%
9	31.99	-44.92	-0.03	-31.99	44.92	0.03	0.000%
10	27.69	-59.90	16.15	-27.69	59.90	-16.15	0.000%
11	27.69	-44.92	16.15	-27.69	44.92	-16.15	0.000%
12	15.97	-59.90	28.00	-15.97	59.90	-28.00	0.000%
13	15.97	-44.92	28.00	-15.97	44.92	-28.00	0.000%
14	-0.03	-59.90	32.35	0.03	59.90	-32.35	0.000%
15	-0.03	-44.92	32.35	0.03	44.92	-32.35	0.000%
16	-16.02	-59.90	28.03	16.02	59.90	-28.03	0.000%
17	-16.02	-44.92	28.03	16.02	44.92	-28.03	0.000%
18	-27.72	-59.90	16.20	27.72	59.90	-16.20	0.000%
19	-27.72	-44.92	16.20	27.72	44.92	-16.20	0.000%
20	-31.99	-59.90	0.03	31.99	59.90	-0.03	0.000%
21	-31.99	-44.92	0.03	31.99	44.92	-0.03	0.000%
22	-27.69	-59.90	-16.15	27.69	59.90	16.15	0.000%
23	-27.69	-44.92	-16.15	27.69	44.92	16.15	0.000%
24	-15.97	-59.90	-28.00	15.97	59.90	28.00	0.000%
25	-15.97	-44.92	-28.00	15.97	44.92	28.00	0.000%
26	0.00	-77.21	0.00	0.00	77.21	-0.00	0.000%
27	0.02	-77.21	-7.06	-0.02	77.21	7.06	0.000%
28	3.51	-77.21	-6.13	-3.51	77.21	6.13	0.000%
29	6.06	-77.21	-3.55	-6.06	77.21	3.55	0.000%
30	6.99	-77.21	-0.02	-6.99	77.21	0.02	0.000%
31	6.05	-77.21	3.52	-6.05	77.21	-3.52	0.000%
32	3.48	-77.21	6.11	-3.48	77.21	-6.11	0.000%
33	-0.02	-77.21	7.06	0.02	77.21	-7.06	0.000%
34	-3.51	-77.21	6.13	3.51	77.21	-6.13	0.000%
35	-6.06	-77.21	3.55	6.06	77.21	-3.55	0.000%
36	-6.99	-77.21	0.02	6.99	77.21	-0.02	0.000%
37	-6.05	-77.21	-3.52	6.05	77.21	3.52	0.000%
38	-3.48	-77.21	-6.11	3.48	77.21	6.11	0.000%
39	0.01	-49.91	-6.18	-0.01	49.91	6.18	0.001%
40	3.06	-49.91	-5.36	-3.06	49.91	5.36	0.000%
41	5.30	-49.91	-3.10	-5.30	49.91	3.10	0.000%
42	6.11	-49.91	-0.01	-6.11	49.91	0.01	0.001%
43	5.29	-49.91	3.09	-5.29	49.91	-3.09	0.000%
44	3.05	-49.91	5.35	-3.05	49.91	-5.35	0.000%
45	-0.01	-49.91	6.18	0.01	49.91	-6.18	0.001%
46	-3.06	-49.91	5.36	3.06	49.91	-5.36	0.000%
47	-5.30	-49.91	3.10	5.30	49.91	-3.10	0.000%
48	-6.11	-49.91	0.01	6.11	49.91	-0.01	0.001%
49	-5.29	-49.91	-3.09	5.29	49.91	3.09	0.000%
50	-3.05	-49.91	-5.35	3.05	49.91	5.35	0.000%

Non-Linear Convergence Results

Load Combination	Converged?	Number of Cycles	Displacement Tolerance	Force Tolerance
1	Yes	6	0.00000001	0.00002245
2	Yes	21	0.00000001	0.00014185
3	Yes	21	0.00000001	0.00010992

4	Yes	25	0.00000001	0.00010287
5	Yes	25	0.00000001	0.00000000
6	Yes	25	0.00000001	0.00010010
7	Yes	24	0.00000001	0.00014708
8	Yes	21	0.00000001	0.00010321
9	Yes	21	0.00000001	0.00007708
10	Yes	25	0.00000001	0.00009375
11	Yes	24	0.00000001	0.00013789
12	Yes	25	0.00000001	0.00010447
13	Yes	25	0.00000001	0.00000000
14	Yes	21	0.00000001	0.00012659
15	Yes	21	0.00000001	0.00009819
16	Yes	25	0.00000001	0.00009756
17	Yes	24	0.00000001	0.00014338
18	Yes	25	0.00000001	0.00009862
19	Yes	24	0.00000001	0.00014532
20	Yes	21	0.00000001	0.00008890
21	Yes	20	0.00000001	0.00012920
22	Yes	25	0.00000001	0.00010318
23	Yes	25	0.00000001	0.00000000
24	Yes	25	0.00000001	0.00009406
25	Yes	24	0.00000001	0.00013806
26	Yes	17	0.00000001	0.00009361
27	Yes	23	0.00000001	0.00012822
28	Yes	23	0.00000001	0.00013703
29	Yes	23	0.00000001	0.00013523
30	Yes	23	0.00000001	0.00012409
31	Yes	23	0.00000001	0.00013067
32	Yes	23	0.00000001	0.00013136
33	Yes	23	0.00000001	0.00012342
34	Yes	23	0.00000001	0.00013124
35	Yes	23	0.00000001	0.00013061
36	Yes	23	0.00000001	0.00012243
37	Yes	23	0.00000001	0.00013263
38	Yes	23	0.00000001	0.00013434
39	Yes	17	0.00000001	0.00010424
40	Yes	18	0.00000001	0.00013383
41	Yes	18	0.00000001	0.00012483
42	Yes	17	0.00000001	0.00008633
43	Yes	18	0.00000001	0.00011069
44	Yes	18	0.00000001	0.00014490
45	Yes	17	0.00000001	0.00010130
46	Yes	18	0.00000001	0.00011476
47	Yes	18	0.00000001	0.00011859
48	Yes	17	0.00000001	0.00008494
49	Yes	18	0.00000001	0.00014188
50	Yes	18	0.00000001	0.00011218

Maximum Tower Deflections - Service Wind

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L1	156 - 151	18.28	39	1.18	0.01
L2	151 - 146	17.04	39	1.18	0.01
L3	146 - 144.5	15.81	39	1.15	0.01
L4	144.5 - 144	15.45	39	1.13	0.01
L5	144 - 139	15.34	39	1.13	0.01
L6	139 - 134	14.17	39	1.10	0.01
L7	134 - 129	13.04	39	1.05	0.00
L8	129 - 128.25	11.98	39	0.98	0.00
L9	128.25 - 128	11.83	39	0.97	0.00
L10	128 - 123	11.77	39	0.97	0.00
L11	123 - 118	10.78	39	0.94	0.00

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L12	118 - 113	9.82	39	0.90	0.00
L13	113 - 108	8.90	39	0.85	0.00
L14	108 - 103	8.04	39	0.80	0.00
L15	103 - 98	7.23	39	0.75	0.00
L16	98 - 93	6.47	39	0.69	0.00
L17	96.5 - 92	6.26	39	0.67	0.00
L18	92 - 87	5.64	39	0.65	0.00
L19	87 - 82	4.98	39	0.60	0.00
L20	82 - 77.5	4.38	39	0.55	0.00
L21	77.5 - 72.5	3.88	39	0.51	0.00
L22	72.5 - 70.58	3.36	39	0.47	0.00
L23	70.58 - 70.33	3.18	39	0.45	0.00
L24	70.33 - 67.08	3.16	39	0.45	0.00
L25	67.08 - 66.83	2.86	39	0.42	0.00
L26	66.83 - 61.83	2.84	39	0.41	0.00
L27	61.83 - 57.5	2.42	39	0.38	0.00
L28	61.75 - 56.75	2.42	39	0.38	0.00
L29	56.75 - 51.75	2.03	39	0.36	0.00
L30	51.75 - 46.75	1.67	39	0.33	0.00
L31	46.75 - 41.75	1.34	39	0.29	0.00
L32	41.75 - 39.8	1.06	39	0.26	0.00
L33	39.8 - 39.33	0.96	39	0.24	0.00
L34	39.33 - 39.08	0.93	39	0.24	0.00
L35	39.08 - 38.33	0.92	39	0.24	0.00
L36	38.33 - 38.08	0.88	39	0.23	0.00
L37	38.08 - 33.08	0.87	39	0.23	0.00
L38	33.08 - 30.75	0.65	39	0.20	0.00
L39	30.75 - 30.5	0.56	39	0.18	0.00
L40	30.5 - 25.5	0.55	39	0.18	0.00
L41	25.5 - 20.5	0.38	39	0.15	0.00
L42	20.5 - 15.5	0.24	39	0.11	0.00
L43	15.5 - 9.8	0.14	39	0.08	0.00
L44	15.05 - 8.8	0.13	39	0.08	0.00
L45	8.8 - 8.25	0.05	39	0.05	0.00
L46	8.25 - 8	0.04	39	0.05	0.00
L47	8 - 4.25	0.04	39	0.05	0.00
L48	4.25 - 4	0.01	39	0.02	0.00
L49	4 - 3	0.01	39	0.02	0.00
L50	3 - 2.75	0.00	39	0.02	0.00
L51	2.75 - 0	0.00	39	0.01	0.00

Critical Deflections and Radius of Curvature - Service Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
154.0000	RR90-17-VDPL2 w/ Mount Pipe	39	17.78	1.18	0.01	19300
150.0000	NNVV-65B-R4	39	16.79	1.18	0.01	13161
143.0000	(2) ATMAA1412D-1A20	39	15.10	1.12	0.01	8228
120.0000	(2) 980H120T4E-M w/ Mount Pipe	39	10.19	0.91	0.00	6982

Maximum Tower Deflections - Design Wind

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
-------------	-----------------	------------------------	--------------------	-----------	------------

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L1	156 - 151	95.01	2	6.04	0.07
L2	151 - 146	88.69	2	6.03	0.07
L3	146 - 144.5	82.43	2	5.91	0.05
L4	144.5 - 144	80.59	2	5.83	0.04
L5	144 - 139	79.98	2	5.83	0.04
L6	139 - 134	73.95	2	5.69	0.03
L7	134 - 129	68.12	2	5.45	0.02
L8	129 - 128.25	62.59	2	5.12	0.02
L9	128.25 - 128	61.79	2	5.07	0.02
L10	128 - 123	61.52	2	5.06	0.02
L11	123 - 118	56.32	2	4.88	0.01
L12	118 - 113	51.32	2	4.67	0.01
L13	113 - 108	46.55	2	4.44	0.01
L14	108 - 103	42.04	2	4.18	0.01
L15	103 - 98	37.82	2	3.90	0.01
L16	98 - 93	33.88	2	3.61	0.01
L17	96.5 - 92	32.76	2	3.52	0.01
L18	92 - 87	29.50	2	3.39	0.01
L19	87 - 82	26.08	2	3.15	0.01
L20	82 - 77.5	22.92	2	2.90	0.00
L21	77.5 - 72.5	20.30	2	2.67	0.00
L22	72.5 - 70.58	17.62	2	2.44	0.00
L23	70.58 - 70.33	16.66	2	2.35	0.00
L24	70.33 - 67.08	16.54	2	2.34	0.00
L25	67.08 - 66.83	15.00	2	2.18	0.00
L26	66.83 - 61.83	14.89	2	2.17	0.00
L27	61.83 - 57.5	12.70	2	2.00	0.00
L28	61.75 - 56.75	12.67	2	2.00	0.00
L29	56.75 - 51.75	10.62	2	1.90	0.00
L30	51.75 - 46.75	8.74	2	1.71	0.00
L31	46.75 - 41.75	7.04	2	1.53	0.00
L32	41.75 - 39.8	5.54	2	1.34	0.00
L33	39.8 - 39.33	5.01	2	1.27	0.00
L34	39.33 - 39.08	4.89	2	1.25	0.00
L35	39.08 - 38.33	4.82	2	1.24	0.00
L36	38.33 - 38.08	4.63	2	1.22	0.00
L37	38.08 - 33.08	4.56	2	1.21	0.00
L38	33.08 - 30.75	3.39	2	1.03	0.00
L39	30.75 - 30.5	2.91	2	0.94	0.00
L40	30.5 - 25.5	2.86	2	0.93	0.00
L41	25.5 - 20.5	1.98	2	0.76	0.00
L42	20.5 - 15.5	1.27	2	0.59	0.00
L43	15.5 - 9.8	0.74	2	0.42	0.00
L44	15.05 - 8.8	0.70	2	0.41	0.00
L45	8.8 - 8.25	0.24	2	0.28	0.00
L46	8.25 - 8	0.21	2	0.26	0.00
L47	8 - 4.25	0.20	2	0.25	0.00
L48	4.25 - 4	0.05	2	0.12	0.00
L49	4 - 3	0.05	2	0.11	0.00
L50	3 - 2.75	0.03	2	0.08	0.00
L51	2.75 - 0	0.02	2	0.08	0.00

Critical Deflections and Radius of Curvature - Design Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
154.0000	RR90-17-VDPL2 w/ Mount Pipe	2	92.48	6.04	0.07	5801
150.0000	NNVV-65B-R4	2	87.43	6.03	0.07	3766
143.0000	(2) ATMAA1412D-1A20	2	78.76	5.81	0.04	1925
120.0000	(2) 980H120T4E-M w/ Mount	2	53.30	4.76	0.01	1380

Elevation	Appurtenance	Gov. Load Comb.	Deflection	Tilt	Twist	Radius of Curvature
ft			in	°	°	ft
Pipe						

Compression Checks

Pole Design Data

Section No.	Elevation	Size	L	L_u	Kl/r	A	P_u
	ft		ft	ft		in^2	K
L1	156 - 151 (1)	TP10.75x10.75x0.365	5.0000	0.0000	0.0	11.908	-0.44
L2	151 - 146 (2)	TP10.75x10.75x0.365	5.0000	0.0000	0.0	11.908	-2.13
L3	146 - 144.5 (3)	TP10.75x10.75x0.365	1.5000	0.0000	0.0	11.908	-2.21
L4	144.5 - 144 (4)	TP18x10.75x0.365	0.5000	0.0000	0.0	11.908	-2.22
L5	144 - 139 (5)	TP18.9435x18x0.25	5.0000	0.0000	0.0	15.048	-6.29
L6	139 - 134 (6)	TP19.8871x18.9435x0.25	5.0000	0.0000	0.0	15.807	-6.78
L7	134 - 129 (7)	TP20.8306x19.8871x0.25	5.0000	0.0000	0.0	16.567	-7.32
L8	129 - 128.25 (8)	TP20.9721x20.8306x0.25	0.7500	0.0000	0.0	16.681	-7.40
L9	128.25 - 128 (9)	TP21.0193x20.9721x0.57	0.2500	0.0000	0.0	37.852	-7.45
L10	128 - 123 (10)	TP21.9628x21.0193x0.56	5.0000	0.0000	0.0	38.761	-8.32
L11	123 - 118 (11)	TP22.9064x21.9628x0.55	5.0000	0.0000	0.0	39.593	-11.80
L12	118 - 113 (12)	TP23.8499x22.9064x0.52	5.0000	0.0000	0.0	39.430	-12.74
L13	113 - 108 (13)	TP24.7934x23.8499x0.51	5.0000	0.0000	0.0	40.069	-13.70
L14	108 - 103 (14)	TP25.7369x24.7934x0.5	5.0000	0.0000	0.0	40.631	-14.70
L15	103 - 98 (15)	TP26.6805x25.7369x0.49	5.0000	0.0000	0.0	41.633	-15.71
L16	98 - 93 (16)	TP27.624x26.6805x0.487	5.0000	0.0000	0.0	41.560	-16.02
L17	93 - 92 (17)	TP27.313x26.4635x0.7	4.5000	0.0000	0.0	59.985	-17.74
L18	92 - 87 (18)	TP28.2568x27.313x0.675	5.0000	0.0000	0.0	59.949	-19.05
L19	87 - 82 (19)	TP29.2006x28.2568x0.65	5.0000	0.0000	0.0	59.756	-20.39
L20	82 - 77.5 (20)	TP30.05x29.2006x0.6375	4.5000	0.0000	0.0	60.376	-21.62
L21	77.5 - 72.5 (21)	TP30.9935x30.05x0.6875	5.0000	0.0000	0.0	67.089	-23.12
L22	72.5 - 70.58 (22)	TP31.3558x30.9935x0.68	1.9200	0.0000	0.0	67.892	-23.69
L23	70.58 - 70.33 (23)	TP31.403x31.3558x0.687	0.2500	0.0000	0.0	67.996	-23.78
L24	70.33 - 67.08 (24)	TP32.0163x31.403x0.675	3.2500	0.0000	0.0	68.120	-24.77
L25	67.08 - 66.83 (25)	TP32.0634x32.0163x0.97	0.2500	0.0000	0.0	97.602	-24.88

Section No.	Elevation ft	Size	L ft	L_u ft	Kl/r	A in^2	P_u K
L26	66.83 - 61.83 (26)	TP33.0069x32.0634x0.95	5.0000	0.0000	0.0	98.062 1	-26.89
L27	61.83 - 57.5 (27)	TP33.824x33.0069x0.95	4.3300	0.0000	0.0	98.108 3	-26.93
L28	57.5 - 56.75 (28)	TP33.3405x32.397x0.937 5	5.0000	0.0000	0.0	97.816 6	-30.49
L29	56.75 - 51.75 (29)	TP34.284x33.3405x0.912 5	5.0000	0.0000	0.0	98.053 9	-32.54
L30	51.75 - 46.75 (30)	TP35.2275x34.284x0.9	5.0000	0.0000	0.0	99.481 2	-34.62
L31	46.75 - 41.75 (31)	TP36.171x35.2275x0.887 5	5.0000	0.0000	0.0	100.83 20	-36.72
L32	41.75 - 39.8 (32)	TP36.539x36.171x0.875	1.9500	0.0000	0.0	100.48 30	-37.54
L33	39.8 - 39.33 (33)	TP36.6277x36.539x0.95	0.4700	0.0000	0.0	109.13 80	-37.77
L34	39.33 - 39.08 (34)	TP36.6749x36.6277x0.93 75	0.2500	0.0000	0.0	107.88 20	-37.89
L35	39.08 - 38.33 (35)	TP36.8164x36.6749x0.93 75	0.7500	0.0000	0.0	108.31 00	-38.23
L36	38.33 - 38.08 (36)	TP36.8636x36.8164x0.88 75	0.2500	0.0000	0.0	102.81 10	-38.34
L37	38.08 - 33.08 (37)	TP37.8073x36.8636x0.87 5	5.0000	0.0000	0.0	104.05 70	-40.58
L38	33.08 - 30.75 (38)	TP38.247x37.8073x0.862 5	2.3300	0.0000	0.0	103.82 60	-41.64
L39	30.75 - 30.5 (39)	TP38.2942x38.247x0.937 5	0.2500	0.0000	0.0	112.77 10	-41.77
L40	30.5 - 25.5 (40)	TP39.2379x38.2942x0.92 5	5.0000	0.0000	0.0	114.11 50	-44.20
L41	25.5 - 20.5 (41)	TP40.1816x39.2379x0.9	5.0000	0.0000	0.0	113.83 80	-46.66
L42	20.5 - 15.5 (42)	TP41.1252x40.1816x0.88 75	5.0000	0.0000	0.0	114.98 90	-49.15
L43	15.5 - 9.8 (43)	TP42.201x41.1252x0.887 5	5.7000	0.0000	0.0	115.23 20	-49.38
L44	9.8 - 8.8 (44)	TP41.6395x40.4602x0.87 5	6.2500	0.0000	0.0	114.85 40	-54.85
L45	8.8 - 8.25 (45)	TP41.7433x41.6395x0.87 5	0.5500	0.0000	0.0	115.14 60	-55.13
L46	8.25 - 8 (46)	TP41.7904x41.7433x0.87 5	0.2500	0.0000	0.0	115.27 90	-55.27
L47	8 - 4.25 (47)	TP42.498x41.7904x0.875	3.7500	0.0000	0.0	117.27 30	-57.29
L48	4.25 - 4 (48)	TP42.5452x42.498x1.05	0.2500	0.0000	0.0	140.29 50	-57.45
L49	4 - 3 (49)	TP42.7339x42.5452x1.05	1.0000	0.0000	0.0	140.93 30	-58.03
L50	3 - 2.75 (50)	TP42.7811x42.7339x1.15	0.2500	0.0000	0.0	154.16 00	-58.19
L51	2.75 - 0 (51)	TP43.3x42.7811x1.125	2.7500	0.0000	0.0	152.77 90	-59.88

Pole Bending Design Data

Section No.	Elevation ft	Size	M_{ux} kip-ft
L1	156 - 151 (1)	TP10.75x10.75x0.365	3.37
L2	151 - 146 (2)	TP10.75x10.75x0.365	26.36
L3	146 - 144.5	TP10.75x10.75x0.365	33.94

Section No.	Elevation ft	Size	M_{ux} kip-ft
L4	144.5 - 144 (3)	TP18x10.75x0.365	33.94
L5	144 - 139 (5) (4)	TP18.9435x18x0.25	91.68
L6	139 - 134 (6)	TP19.8871x18.9435x0.25	156.16
L7	134 - 129 (7)	TP20.8306x19.8871x0.25	223.03
L8	129 - 128.25 (8)	TP20.9721x20.8306x0.25	233.28
L9	128.25 - 128 (9)	TP21.0193x20.9721x0.57 5	236.70
L10	128 - 123 (10)	TP21.9628x21.0193x0.56 25	306.79
L11	123 - 118 (11)	TP22.9064x21.9628x0.55	384.52
L12	118 - 113 (12)	TP23.8499x22.9064x0.52 5	472.39
L13	113 - 108 (13)	TP24.7934x23.8499x0.51 25	563.22
L14	108 - 103 (14)	TP25.7369x24.7934x0.5	657.00
L15	103 - 98 (15)	TP26.6805x25.7369x0.49 38	753.77
L16	98 - 93 (16)	TP27.624x26.6805x0.487 5	783.40
L17	93 - 92 (17)	TP27.313x26.4635x0.7	874.13
L18	92 - 87 (18)	TP28.2568x27.313x0.675	978.09
L19	87 - 82 (19)	TP29.2006x28.2568x0.65	1085.22
L20	82 - 77.5 (20)	TP30.05x29.2006x0.6375	1184.34
L21	77.5 - 72.5 (21)	TP30.9935x30.05x0.6875	1297.52
L22	72.5 - 70.58 (22)	TP31.3558x30.9935x0.68 75	1341.84
L23	70.58 - 70.33 (23)	TP31.403x31.3558x0.687 5	1347.64
L24	70.33 - 67.08 (24)	TP32.0163x31.403x0.675	1423.84
L25	67.08 - 66.83 (25)	TP32.0634x32.0163x0.97 5	1429.76
L26	66.83 - 61.83 (26)	TP33.0069x32.0634x0.95	1550.01
L27	61.83 - 57.5 (27)	TP33.824x33.0069x0.95	1551.96
L28	57.5 - 56.75 (28)	TP33.3405x32.397x0.937 5	1676.14
L29	56.75 - 51.75 (29)	TP34.284x33.3405x0.912 5	1804.07
L30	51.75 - 46.75 (30)	TP35.2275x34.284x0.9	1935.46
L31	46.75 - 41.75 (31)	TP36.171x35.2275x0.887 5	2070.27
L32	41.75 - 39.8 (32)	TP36.539x36.171x0.875	2123.77
L33	39.8 - 39.33 (33)	TP36.6277x36.539x0.95	2136.73
L34	39.33 - 39.08 (34)	TP36.6749x36.6277x0.93 75	2143.65
L35	39.08 - 38.33 (35)	TP36.8164x36.6749x0.93 75	2164.43
L36	38.33 - 38.08 (36)	TP36.8636x36.8164x0.88 75	2171.38
L37	38.08 - 33.08 (37)	TP37.8073x36.8636x0.87 5	2311.98
L38	33.08 - 30.75 (38)	TP38.247x37.8073x0.862 5	2378.62
L39	30.75 - 30.5 (39)	TP38.2942x38.247x0.937 5	2385.81
L40	30.5 - 25.5	TP39.2379x38.2942x0.92	2531.28


Section No.	Elevation	Size	M_{ux}
	ft		
L41	25.5 - 20.5 (40)	TP40.1816x39.2379x0.9 5	2679.85
L42	20.5 - 15.5 (41)	TP41.1252x40.1816x0.88 75	2831.35
L43	15.5 - 9.8 (43)	TP42.201x41.1252x0.887 5	2845.13
L44	9.8 - 8.8 (44)	TP41.6395x40.4602x0.87 5	3039.03
L45	8.8 - 8.25 (45)	TP41.7433x41.6395x0.87 5	3056.32
L46	8.25 - 8 (46)	TP41.7904x41.7433x0.87 5	3064.18
L47	8 - 4.25 (47)	TP42.498x41.7904x0.875	3182.98
L48	4.25 - 4 (48)	TP42.5452x42.498x1.05	3190.95
L49	4 - 3 (49)	TP42.7339x42.5452x1.05	3222.91
L50	3 - 2.75 (50)	TP42.7811x42.7339x1.15	3230.92
L51	2.75 - 0 (51)	TP43.3x42.7811x1.125	3319.45

Pole Shear Design Data

Section No.	Elevation	Size	Actual V_u K
	ft		
L1	156 - 151 (1)	TP10.75x10.75x0.365	1.05
L2	151 - 146 (2)	TP10.75x10.75x0.365	5.03
L3	146 - 144.5 (3)	TP10.75x10.75x0.365	5.09
L4	144.5 - 144 (4)	TP18x10.75x0.365	5.11
L5	144 - 139 (5)	TP18.9435x18x0.25	12.67
L6	139 - 134 (6)	TP19.8871x18.9435x0.25	13.13
L7	134 - 129 (7)	TP20.8306x19.8871x0.25	13.62
L8	129 - 128.25 (8)	TP20.9721x20.8306x0.25	13.70
L9	128.25 - 128 (9)	TP21.0193x20.9721x0.57 5	13.73
L10	128 - 123 (10)	TP21.9628x21.0193x0.56 25	14.31
L11	123 - 118 (11)	TP22.9064x21.9628x0.55	17.29
L12	118 - 113 (12)	TP23.8499x22.9064x0.52 5	17.88
L13	113 - 108 (13)	TP24.7934x23.8499x0.51 25	18.47
L14	108 - 103 (14)	TP25.7369x24.7934x0.5	19.06
L15	103 - 98 (15)	TP26.6805x25.7369x0.49 38	19.67
L16	98 - 93 (16)	TP27.624x26.6805x0.487 5	19.85
L17	93 - 92 (17)	TP27.313x26.4635x0.7	20.48
L18	92 - 87 (18)	TP28.2568x27.313x0.675	21.12
L19	87 - 82 (19)	TP29.2006x28.2568x0.65	21.75
L20	82 - 77.5 (20)	TP30.05x29.2006x0.6375	22.32
L21	77.5 - 72.5 (21)	TP30.9935x30.05x0.6875	22.97
L22	72.5 - 70.58 (22)	TP31.3558x30.9935x0.68 75	23.22
L23	70.58 - 70.33 (23)	TP31.403x31.3558x0.687 5	23.24
L24	70.33 - 67.08 (24)	TP32.0163x31.403x0.675	23.67


Section No.	Elevation ft	Size	Actual V_u K
L25	67.08 - 66.83 (25)	TP32.0634x32.0163x0.97 5	23.69
L26	66.83 - 61.83 (26)	TP33.0069x32.0634x0.95	24.42
L27	61.83 - 57.5 (27)	TP33.824x33.0069x0.95	24.44
L28	57.5 - 56.75 (28)	TP33.3405x32.397x0.937 5	25.24
L29	56.75 - 51.75 (29)	TP34.284x33.3405x0.912 5	25.95
L30	51.75 - 46.75 (30)	TP35.2275x34.284x0.9	26.64
L31	46.75 - 41.75 (31)	TP36.171x35.2275x0.887 5	27.31
L32	41.75 - 39.8 (32)	TP36.539x36.171x0.875	27.59
L33	39.8 - 39.33 (33)	TP36.6277x36.539x0.95	27.63
L34	39.33 - 39.08 (34)	TP36.6749x36.6277x0.93 75	27.67
L35	39.08 - 38.33 (35)	TP36.8164x36.6749x0.93 75	27.77
L36	38.33 - 38.08 (36)	TP36.8636x36.8164x0.88 75	27.80
L37	38.08 - 33.08 (37)	TP37.8073x36.8636x0.87 5	28.46
L38	33.08 - 30.75 (38)	TP38.247x37.8073x0.862 5	28.76
L39	30.75 - 30.5 (39)	TP38.2942x38.247x0.937 5	28.78
L40	30.5 - 25.5 (40)	TP39.2379x38.2942x0.92 5	29.43
L41	25.5 - 20.5 (41)	TP40.1816x39.2379x0.9	30.03
L42	20.5 - 15.5 (42)	TP41.1252x40.1816x0.88 75	30.60
L43	15.5 - 9.8 (43)	TP42.201x41.1252x0.887 5	30.64
L44	9.8 - 8.8 (44)	TP41.6395x40.4602x0.87 5	31.42
L45	8.8 - 8.25 (45)	TP41.7433x41.6395x0.87 5	31.47
L46	8.25 - 8 (46)	TP41.7904x41.7433x0.87 5	31.49
L47	8 - 4.25 (47)	TP42.498x41.7904x0.875	31.90
L48	4.25 - 4 (48)	TP42.5452x42.498x1.05	31.91
L49	4 - 3 (49)	TP42.7339x42.5452x1.05	32.03
L50	3 - 2.75 (50)	TP42.7811x42.7339x1.15	32.04
L51	2.75 - 0 (51)	TP43.3x42.7811x1.125	32.37

APPENDIX B BASE LEVEL DRAWING

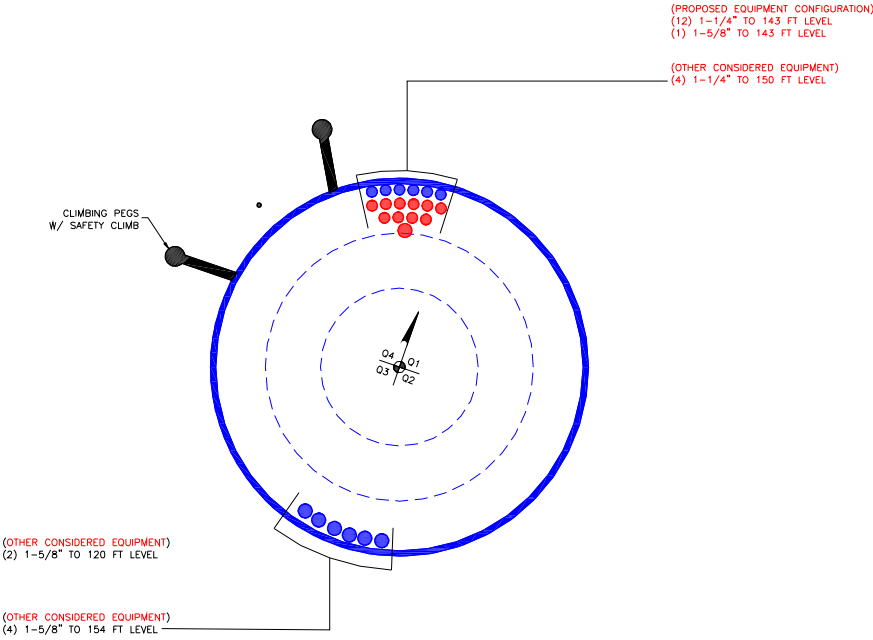

APPENDIX C
ADDITIONAL CALCULATIONS


Section	Length (ft)	Number of Sides	Thickness (in)	Socket Length (ft)	Top Dia (in)	Bot Dia (in)	Grade	Weight (K)
1	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
2	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
3	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
4	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
5	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
6	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
7	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
8	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
9	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
10	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
11	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
12	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
13	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
14	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
15	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
16	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
17	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
18	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
19	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
20	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
21	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
22	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
23	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
24	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
25	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
26	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
27	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
28	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
29	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
30	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
31	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
32	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
33	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
34	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
35	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
36	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
37	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
38	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
39	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
40	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
41	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
42	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
43	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
44	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
45	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
46	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
47	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
48	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
49	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2
50	5.0000	0	0.3650		18.9435	18.9435	A53-B-35	0.2

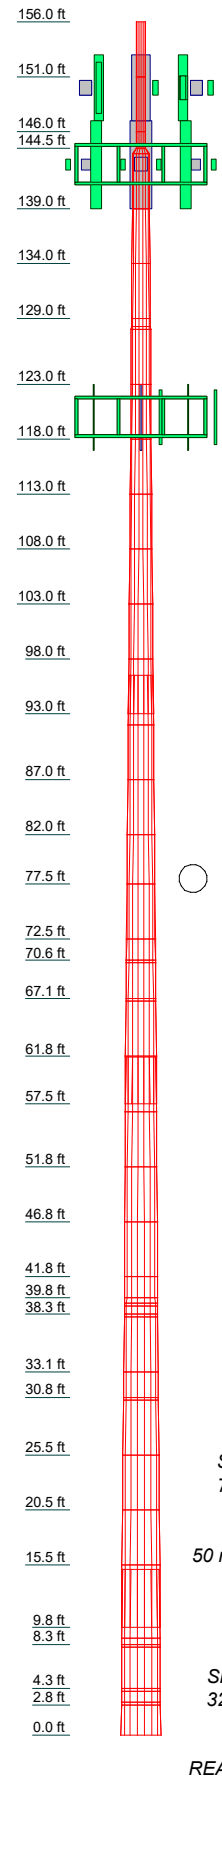

MATERIAL STRENGTH					
GRADE	Fy	Fu	GRADE	Fy	Fu
A53-B-35	35 ksi	60 ksi	A36	36 ksi	58 ksi

TOWER DESIGN NOTES

1. Tower is located in Windham County, Connecticut.
2. Tower designed for Exposure C to the TIA-222-H Standard.
3. Tower designed for a 130 mph basic wind in accordance with the TIA-222-H Standard.
4. Tower is also designed for a 50 mph basic wind with 1.27 in ice. Ice is considered to increase in thickness with height.
5. Deflections are based upon a 60 mph wind.
6. Tower Risk Category II.
7. Topographic Category 1 with Crest Height of 0.0000 ft
8. TIA-222-H Annex S

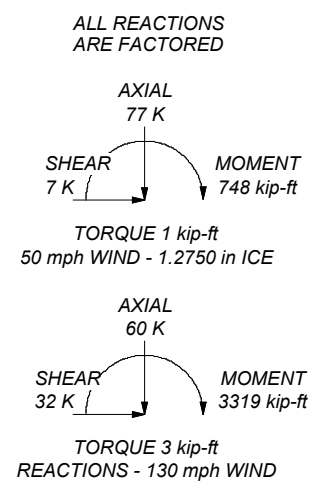

Paul J. Ford and Company
 250 East Broad st., Suite 600
 Columbus, OH 43215
 Phone: (614) 221-6679
 FAX:

Job: **156' MP; Thompson/I-395 X99_1; Thompson, C**
 Project: **PJF# 37519-0534.001.7805 / BU# 828402**
 Client: CCI
 Code: TIA-222-H
 Path:

Drawn by: uyerra
 Date: 02/11/19
 Scale: NTS
 Dwg No. E-1

v4.5.6 - Effective 1-21-19

Asymmetric Anchor Rod Analysis

Moment = 3319 k-ft TIA Ref. = H η = 0.50 for Base Plates, Rev. G Sect. 4.9.9 Use An? No for Anchors or Bolts
 Axial = 60.0 kips (+Comp, -Tension) ASIF = N/A Threads = N-Included for Flange Plates, Rev. G & H
 Shear = 32.0 kips Max Ratio = 100.0% Grout = 0.00 psi, for Base Plates, Rev. H Sect 4.9.9 (Note)
 Anchor Qty = 27 Location = Base Plate

**** For Post Installed Anchors: Check anchors for embedment, epoxy/grout bond, and capacity based on proof load. ****

Item	Nominal Anchor Dia, in	Spec	Fy, ksi	Fu, ksi	Location, degrees	Anchor Circle, in	Type	Area Override, in ²	lar, in	Area, in ²	Max Net Comp, kips	Max Net Tension, kips	Tension Override, kips	Comp Override, kips	Tension Cap, kips	Comp Cap, kips	Capacity Ratio
1	2.000	Other	42	60	0.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
2	2.000	Other	42	60	20.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
3	2.000	Other	42	60	40.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
4	2.000	Other	42	60	60.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
5	2.000	Other	42	60	80.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
6	2.000	Other	42	60	100.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
7	2.000	Other	42	60	120.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
8	2.000	Other	42	60	140.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
9	2.000	Other	42	60	160.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
10	2.000	Other	42	60	180.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
11	2.000	Other	42	60	200.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
12	2.000	Other	42	60	220.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
13	2.000	Other	42	60	240.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
14	2.000	Other	42	60	260.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
15	2.000	Other	42	60	280.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
16	2.000	Other	42	60	300.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
17	2.000	Other	42	60	320.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
18	2.000	Other	42	60	340.0	51.00	Original	0.00	1.13	3.14	98.70	92.03	0.00	0.00	112.42	104.87	89.9%
19	2.250	A193 Gr B7	105	125	30.0	58.00	Post-Installed	0.00		3.98	137.26	137.26	0.00	0.00	304.47	341.01	38.3%
20	2.250	A193 Gr B7	105	125	51.0	58.00	Post-Installed	0.00		3.98	137.26	137.26	0.00	0.00	304.47	341.01	38.3%
21	2.250	A193 Gr B7	105	125	90.0	58.00	Post-Installed	0.00		3.98	137.26	137.26	0.00	0.00	304.47	341.01	38.3%
22	2.250	A193 Gr B7	105	125	150.0	58.00	Post-Installed	0.00		3.98	137.26	137.26	0.00	0.00	304.47	341.01	38.3%
23	2.250	A193 Gr B7	105	125	171.0	58.00	Post-Installed	0.00		3.98	137.26	137.26	0.00	0.00	304.47	341.01	38.3%
24	2.250	A193 Gr B7	105	125	210.0	58.00	Post-Installed	0.00		3.98	137.26	137.26	0.00	0.00	304.47	341.01	38.3%
25	2.250	A193 Gr B7	105	125	270.0	58.00	Post-Installed	0.00		3.98	137.26	137.26	0.00	0.00	304.47	341.01	38.3%
26	2.250	A193 Gr B7	105	125	291.0	58.00	Post-Installed	0.00		3.98	137.26	137.26	0.00	0.00	304.47	341.01	38.3%
27	2.250	A193 Gr B7	105	125	330.0	58.00	Post-Installed	0.00		3.98	137.26	137.26	0.00	0.00	304.47	341.01	38.3%
										92.33							

Monopole Base Plate Connection




Site Info	
BU #	828402
Site Name	
Order #	

Analysis Considerations	
TIA-222 Revision	H
Grout Considered:	No
l_{ar} (in)	1.125

Applied Loads	
Moment (kip-ft)	1823.80
Axial Force (kips)	60.00
Shear Force (kips)	32.00

*TIA-222-H Section 15.5 Applied

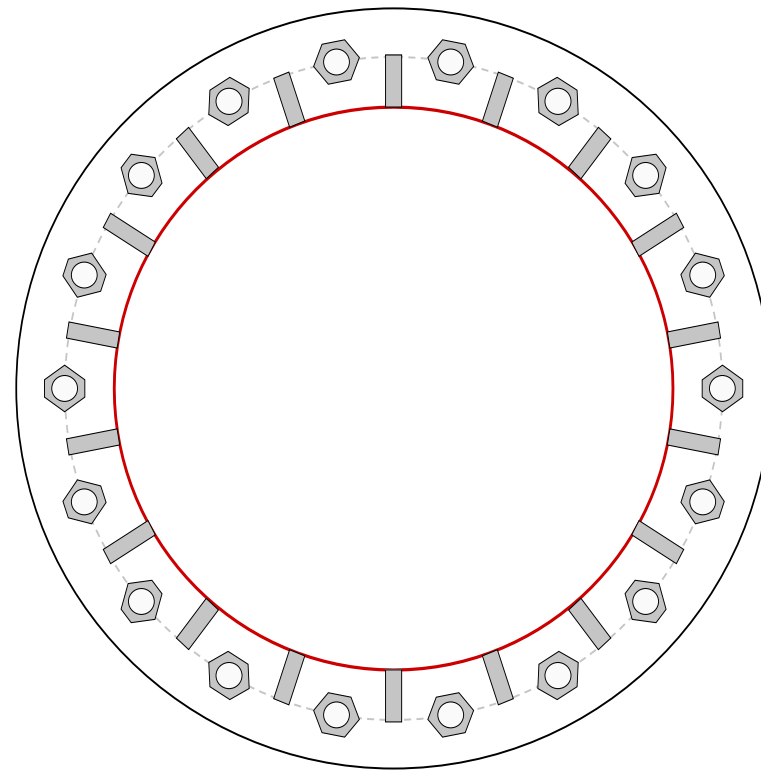

Connection Properties	Analysis Results	
Anchor Rod Data	Anchor Rod Summary <i>(units of kips, kip-in)</i>	
(18) 2" ϕ bolts (A572-42 N; $F_y=42$ ksi, $F_u=60$ ksi) on 51" BC	$P_{u_c} = 98.64$	$\phi P_{n_c} = 105$ Stress Rating
Base Plate Data	$V_u = 1.78$	$\phi V_n = 31.5$ 89.8%
58.5" OD x 1.5" Plate (A36; $F_y=36$ ksi, $F_u=58$ ksi)	$M_u = n/a$	$\phi M_n = n/a$ Pass
Stiffener Data	Base Plate Summary	
(18) 18"H x 4"W x 1.25"T, Notch: 1" plate: $F_y=36$ ksi ; weld: $F_y=70$ ksi horiz. weld: 0.625" fillet vert. weld: 0.375" fillet	Max Stress (ksi): 30.48	(Roark's Flexural)
Pole Data	Allowable Stress (ksi): 32.4	
43.3" x 0.375" 12-sided pole (A36; $F_y=36$ ksi, $F_u=58$ ksi)	Stress Rating: 89.6%	Pass
	Stiffener Summary	
	Horizontal Weld: 74.5%	Pass
	Vertical Weld: 23.1%	Pass
	Plate Flexure+Shear: 5.3%	Pass
	Plate Tension+Shear: 52.7%	Pass
	Plate Compression: 39.1%	Pass
	Pole Summary	
	Punching Shear: 8.7%	Pass

v4.5.6 - Effective 1-21-19

Asymmetric Bolt Analysis

Moment = k-ft
 Axial = kips (+Comp, -Tension)
 Shear = kips
 Anchor Qty =

TIA Ref. =
 ASIF =
 Max Ratio =
 Location =

η = for Base Plates, Rev. G Sect. 4.9.9
 Threads = for Flange Plates, Rev. G & H
 Grout = psi, for Base Plates, Rev. H Sect 4.9.9 (Note)

Use An? for Anchors or Bolts

**** For Flange Plates: Prying action is not considered in the bolt loads. ****

Item	Nominal Bolt Dia, in	Spec	Fy, ksi	Fu, ksi	Location, degrees	Bolt Circle, in	Type	Area Override, in ²	lar, in	Area, in ²	Max Net Comp, kips	Max Net Tension, kips	Tension Override, kips	Comp Override, kips	Tension Cap, kips	Comp Cap, kips	Capacity Ratio
1	0.750	A325	92	120	0.0	19.88	Original	0.00		0.44	1.11	0.95	20.34	20.34	20.34		4.4%
2	0.750	A325	92	120	60.0	19.88	Original	0.00		0.44	1.11	0.95	20.34	20.34	20.34		4.4%
3	0.750	A325	92	120	120.0	19.88	Original	0.00		0.44	1.11	0.95	20.34	20.34	20.34		4.4%
4	0.750	A325	92	120	180.0	19.88	Original	0.00		0.44	1.11	0.95	20.34	20.34	20.34		4.4%
5	0.750	A325	92	120	240.0	19.88	Original	0.00		0.44	1.11	0.95	20.34	20.34	20.34		4.4%
6	0.750	A325	92	120	300.0	19.88	Original	0.00		0.44	1.11	0.95	20.34	20.34	20.34		4.4%
7	1.750	A193 Gr B7	105	125	15.0	38.00	Original	0.00		2.41	11.17	10.29	100.00	100.00	100.00		9.8%
8	1.750	A193 Gr B7	105	125	105.0	38.00	Original	0.00		2.41	11.17	10.29	100.00	100.00	100.00		9.8%
9	1.750	A193 Gr B7	105	125	195.0	38.00	Original	0.00		2.41	11.17	10.29	100.00	100.00	100.00		9.8%
10	1.750	A193 Gr B7	105	125	285.0	38.00	Original	0.00		2.41	11.17	10.29	100.00	100.00	100.00		9.8%
										12.27							

Monopole Flange Plate Connection

Elevation = 144 ft.




BU #	828402
Site Name	
Order #	
TIA-222 Revision	H


Applied Loads	
Moment (kip-ft)	2.60
Axial Force (kips)	0.50
Shear Force (kips)	1.10

*TIA-222-H Section 15.5 Applied

Top Plate - External

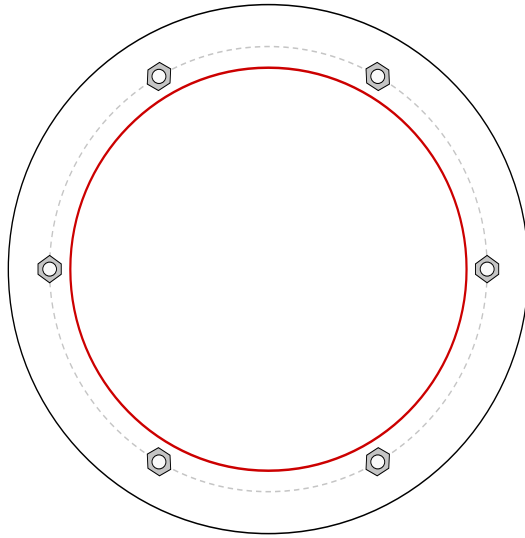

Bottom Plate - External

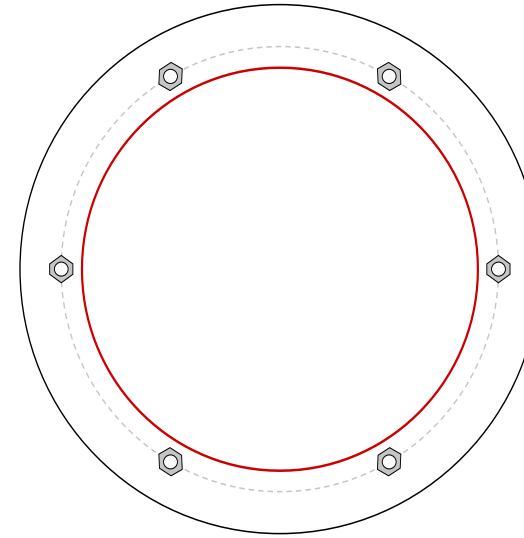

Connection Properties

Bolt Data

(6) 5/8" ϕ bolts (A325 X; Fy=92 ksi, Fu=120 ksi) on 19.875" BC

Top Plate Data

23.625" OD x 1.5" Plate (A36; Fy=36 ksi, Fu=58 ksi)

Top Stiffener Data

N/A

Top Pole Data

18" x 0.365" round pole (A53-B-35; Fy=35 ksi, Fu=60 ksi)

Bottom Plate Data

23.625" OD x 0.5" Plate (A36; Fy=36 ksi, Fu=58 ksi)

Bottom Stiffener Data

N/A

Bottom Pole Data

18" x 0.25" 12-sided pole (A36; Fy=36 ksi, Fu=58 ksi)

Analysis Results

Bolt Capacity

Max Load (kips)	0.96
Allowable (kips)	20.34
Stress Rating:	4.5% Pass

Top Plate Capacity

Max Stress (ksi):	0.22	(Flexural)
Allowable Stress (ksi):	32.40	
Stress Rating:	0.7%	Pass
Tension Side Stress Rating:	0.2%	Pass

Bottom Plate Capacity

Max Stress (ksi):	2.01	(Flexural)
Allowable Stress (ksi):	32.40	
Stress Rating:	5.9%	Pass
Tension Side Stress Rating:	2.2%	Pass

Drilled Pier Foundation



BU # :	828402
Site Name:	
Order Number:	
TIA-222 Revison:	H
Tower Type:	Monopole

Applied Loads		
	Comp.	Uplift
Moment (kip-ft)	3319	
Axial Force (kips)	60	
Shear Force (kips)	32	

Material Properties		
Concrete Strength, f _c :	3	ksi
Rebar Strength, F _y :	60	ksi

Pier Design Data		
Depth	25.25	ft
Ext. Above Grade	0.25	ft
Pier Section 1		
<i>From 0.25' above grade to 25.25' below grade</i>		
Pier Diameter	6	ft
Rebar Quantity	34	
Rebar Size	8	
Clear Cover to Ties	3	in
Tie Size	4	

Analysis Results		
Soil Lateral Capacity		
D _{v=0} (ft from TOC)	6.81	-
Soil Safety Factor	4.40	-
Max Moment (kip-ft)	3558.72	-
Rating*	28.8%	-
Soil Vertical Capacity		
Skin Friction (kips)	557.71	-
End Bearing (kips)	566.19	-
Weight of Concrete (kips)	129.78	-
Total Capacity (kips)	1123.90	-
Axial (kips)	189.78	-
Rating*	16.1%	-
Reinforced Concrete Capacity		
Critical Depth (ft from TOC)	6.60	-
Critical Moment (kip-ft)	3558.41	-
Critical Moment Capacity	3686.96	-
Rating*	91.9%	-
Soil Interaction Rating*		28.8%
Structural Foundation Rating*		91.9%

Check Limitation	
Apply TIA-222-H Section 15.5:	<input checked="" type="checkbox"/>

*Rating per TIA-222-H Section 15.5

Soil Profile		
Groundwater Depth	n/a	ft
# of Layers	5	

Layer	Top (ft)	Bottom (ft)	Thickness (ft)	γ _{soil} (pcf)	γ _{concrete} (pcf)	Cohesion (ksf)	Angle of Friction (degrees)	Calculated Ultimate Skin Friction Comp (ksf)	Calculated Ultimate Skin Friction Uplift (ksf)	Ultimate Skin Friction Comp Override (ksf)	Ultimate Skin Friction Uplift Override (ksf)	Ult. Gross Bearing Capacity (ksf)	SPT Blow Count	Soil Type
1	0	4	4	140	150	0	0	0.000	0.000	0.00	0.00			Cohesionless
2	4	8	4	130	150		38	0.000	0.000	0.90	0.90			Cohesionless
3	8	15	7	140	150		42	0.000	0.000	1.60	1.60			Cohesionless
4	15	20	5	140	150		42	0.000	0.000	2.20	2.20			Cohesionless
5	20	25.25	5.25	140	150		42	0.000	0.000	2.60	2.60	26.7		Cohesionless

Site BU: 828402

Work Order: _____



Copyright © 2018 Crown Castle

Pole Geometry

	Pole Height Above Base (ft)	Section Length (ft)	Lap Splice Length (ft)	Number of Sides	Top Diameter (in)	Bottom Diameter (in)	Wall Thickness (in)	Bend Radius (in)	Pole Material
1	156	11.5	0	0	10.75	10.75	0.365		A53-B-35
2	144.5	0.5	0	0	10.75	18	0.365		A53-B-35
3	144	51	3.5	12	18.00	27.624	0.25	Auto	A36
4	96.5	19	0	12	26.46	30.05	0.25	Auto	A36
5	77.5	20	4.25	12	30.05	33.824	0.3125	Auto	A36
6	61.75	21.95	0	12	32.40	36.539	0.3125	Auto	A36
7	39.8	30	5.25	12	36.54	42.201	0.375	Auto	A36
8	15.05	15.05	0	12	40.46	43.3	0.375	Auto	A36

Reinforcement Configuration

	Bottom Effective Elevation (ft)	Top Effective Elevation (ft)	Type	Model	Number	1	2	3	4	5	6	7	8	9	10	11	12
1	4.25	39.33	plate	I-085125; (1) (1.1875)	2	o				o							
2	8.25	38.33	plate	CCI-SFP-065125	1									o			
3	39.33	70.58	plate	CCI-AFP-085125	2	o				o							
4	38.33	70.58	plate	CCI-AFP-085125	1									o			
5	70.58	94.67	plate	I-085125; (1) (1.1875)	3	o				o				o			
6	94.67	128.25	plate	CCI-AFP-060100	3	o				o				o			
7	3	30.75	plate	I-085125; (1) (1.1875)	3				o				o				o
8	30.75	67.08	plate	CCI-AFP-065125	3				o	o			o				o
9	0	4.25	plate	FP 1.25 x 6.5_1	4	o			c	o							c
10	0	8.25	plate	FP 1.25 x 6.5_1	2							c	c				
11	0	3	plate	FP 1.25 x 3.5_1	9		o	o	o		o	o	o		o	o	o
12																	

Reinforcement Details

	B (in)	H (in)	Gross Area (in ²)	Pole Face to Centroid (in)	Bottom Termination Length (in)	Top Termination Length (in)	L _v (in)	Net Area (in ²)	Bolt Hole Size (in)	Reinforcement Material
1	8.5	1.25	10.625	0.625	n/a	n/a	17.000	9.063	1.1875	A572-65
2	6.5	1.25	8.125	0.625	33.000	33.000	19.000	6.563	1.1875	A572-65
3	8.5	1.25	10.625	0.625	51.000	51.000	17.000	9.063	1.1875	A572-65
4	8.5	1.25	10.625	0.625	51.000	51.000	17.000	9.063	1.1875	A572-65
5	8.5	1.25	10.625	0.625	60.000	60.000	17.000	9.063	1.1875	A572-65
6	6	1	6	0.5	30.000	30.000	16.000	4.750	1.1875	A572-65
7	8.5	1.25	10.625	0.625	n/a	n/a	17.000	9.063	1.1875	A572-65
8	6.5	1.25	8.125	0.625	42.000	42.000	19.000	6.563	1.1875	A572-65
9	1.25	6.5	8.125	3.25	n/a	n/a	0.000	8.125	0.0000	A572-65
10	1.25	6.5	8.125	3.25	n/a	n/a	0.000	8.125	0.0000	A572-65
11	1.25	3.5	4.375	1.75	n/a	n/a	0.000	4.375	0.0000	A572-65

TNX Geometry Input

Increment (ft): 5

	Section Height (ft)	Section Length (ft)	Lap Splice Length (ft)	Number of Sides	Top Diameter (in)	Bottom Diameter (in)	Wall Thickness (in)	Tapered Pole Grade	Weight Multiplier
1	156 - 151	5		0	10.750	10.750	0.365	A53-B-35	1.000
2	151 - 146	5		0	10.750	10.750	0.365	A53-B-35	1.000
3	146 - 144.5	1.5	0	0	10.750	10.750	0.365	A53-B-35	1.000
4	144.5 - 144	0.5	0	0	10.750	18.000	0.365	A53-B-35	1.000
5	144 - 139	5		12	18.000	18.944	0.25	A36	1.000
6	139 - 134	5		12	18.944	19.887	0.25	A36	1.000
7	134 - 129	5		12	19.887	20.831	0.25	A36	1.000
8	129 - 128.25	0.75		12	20.831	20.972	0.25	A36	1.000
9	128.25 - 128	0.25		12	20.972	21.019	0.575	A36	0.918
10	128 - 123	5		12	21.019	21.963	0.5625	A36	0.916
11	123 - 118	5		12	21.963	22.906	0.55	A36	0.916
12	118 - 113	5		12	22.906	23.850	0.525	A36	0.939
13	113 - 108	5		12	23.850	24.793	0.5125	A36	0.943
14	108 - 103	5		12	24.793	25.737	0.5	A36	0.949
15	103 - 98	5		12	25.737	26.680	0.49375	A36	0.944
16	98 - 96.5	5	3.5	12	26.680	27.624	0.4875	A36	0.951
17	96.5 - 92	4.5		12	26.464	27.313	0.7	A36	0.895
18	92 - 87	5		12	27.313	28.257	0.675	A36	0.909
19	87 - 82	5		12	28.257	29.201	0.65	A36	0.924
20	82 - 77.5	4.5	0	12	29.201	30.050	0.6375	A36	0.926
21	77.5 - 72.5	5		12	30.050	30.994	0.6875	A36	0.936
22	72.5 - 70.58	1.92		12	30.994	31.356	0.6875	A36	0.930
23	70.58 - 70.33	0.25		12	31.356	31.403	0.6875	A36	0.930
24	70.33 - 67.08	3.25		12	31.403	32.016	0.675	A36	0.937
25	67.08 - 66.83	0.25		12	32.016	32.063	0.975	A36	0.904
26	66.83 - 61.83	5		12	32.063	33.007	0.95	A36	0.910
27	61.83 - 61.75	4.33	4.25	12	33.007	33.824	0.95	A36	0.910
28	61.75 - 56.75	5		12	32.397	33.341	0.9375	A36	0.916
29	56.75 - 51.75	5		12	33.341	34.284	0.9125	A36	0.923
30	51.75 - 46.75	5		12	34.284	35.228	0.9	A36	0.919
31	46.75 - 41.75	5		12	35.228	36.171	0.8875	A36	0.917
32	41.75 - 39.8	1.95	0	12	36.171	36.539	0.875	A36	0.923
33	39.8 - 39.33	0.47		12	36.539	36.628	0.95	A36	0.917
34	39.33 - 39.08	0.25		12	36.628	36.675	0.9375	A36	0.928
35	39.08 - 38.33	0.75		12	36.675	36.816	0.9375	A36	0.926
36	38.33 - 38.08	0.25		12	36.816	36.864	0.8875	A36	0.952
37	38.08 - 33.08	5		12	36.864	37.807	0.875	A36	0.952
38	33.08 - 30.75	2.33		12	37.807	38.247	0.8625	A36	0.959
39	30.75 - 30.5	0.25		12	38.247	38.294	0.9375	A36	0.950
40	30.5 - 25.5	5		12	38.294	39.238	0.925	A36	0.949
41	25.5 - 20.5	5		12	39.238	40.182	0.9	A36	0.961
42	20.5 - 15.5	5		12	40.182	41.125	0.8875	A36	0.961
43	15.5 - 15.05	5.7	5.25	12	41.125	42.201	0.8875	A36	0.960
44	15.05 - 8.8	6.25		12	40.460	41.639	0.875	A36	0.968
45	8.8 - 8.25	0.55		12	41.639	41.743	0.875	A36	0.967
46	8.25 - 8	0.25		12	41.743	41.790	0.875	A36	1.036
47	8 - 4.25	3.75		12	41.790	42.498	0.875	A36	1.026
48	4.25 - 4	0.25		12	42.498	42.545	1.05	A36	0.938
49	4 - 3	1		12	42.545	42.734	1.05	A36	0.936
50	3 - 2.75	0.25		12	42.734	42.781	1.15	A36	0.905
51	2.75 - 0	2.75		12	42.781	43.300	1.125	A36	0.917

TNX Section Forces

Increment (ft):		TNX Output			
	5	Section Height (ft)	P _u (K)	M _{ux} (kip-ft)	V _u (K)
1	156 - 151		0.44	3.37	1.05
2	151 - 146		2.13	26.36	5.03
3	146 - 144.5		2.21	34.00	5.14
4	144.5 - 144		2.25	36.57	5.16
5	144 - 139		6.29	91.68	12.67
6	139 - 134		6.78	156.16	13.13
7	134 - 129		7.32	223.03	13.62
8	129 - 128.25		7.40	233.28	13.70
9	128.25 - 128		7.45	236.70	13.73
10	128 - 123		8.32	306.79	14.31
11	123 - 118		11.80	384.52	17.29
12	118 - 113		12.74	472.39	17.88
13	113 - 108		13.70	563.22	18.47
14	108 - 103		14.70	657.00	19.06
15	103 - 98		15.71	753.77	19.67
16	98 - 96.5		16.02	783.40	19.85
17	96.5 - 92		17.74	874.13	20.48
18	92 - 87		19.05	978.09	21.12
19	87 - 82		20.39	1085.22	21.75
20	82 - 77.5		21.62	1184.35	22.32
21	77.5 - 72.5		23.12	1297.52	22.97
22	72.5 - 70.58		23.69	1341.84	23.22
23	70.58 - 70.33		23.78	1347.64	23.24
24	70.33 - 67.08		24.77	1423.84	23.67
25	67.08 - 66.83		24.88	1429.76	23.69
26	66.83 - 61.83		26.89	1550.01	24.42
27	61.83 - 61.75		26.93	1551.96	24.44
28	61.75 - 56.75		30.49	1676.14	25.24
29	56.75 - 51.75		32.54	1804.06	25.95
30	51.75 - 46.75		34.62	1935.46	26.64
31	46.75 - 41.75		36.72	2070.27	27.31
32	41.75 - 39.8		37.54	2123.76	27.59
33	39.8 - 39.33		37.77	2136.73	27.63
34	39.33 - 39.08		37.89	2143.65	27.67
35	39.08 - 38.33		38.23	2164.43	27.77
36	38.33 - 38.08		38.34	2171.37	27.80
37	38.08 - 33.08		40.58	2311.98	28.46
38	33.08 - 30.75		41.64	2378.62	28.76
39	30.75 - 30.5		41.77	2385.81	28.78
40	30.5 - 25.5		44.20	2531.29	29.43
41	25.5 - 20.5		46.66	2679.85	30.03
42	20.5 - 15.5		49.15	2831.35	30.60
43	15.5 - 15.05		49.38	2845.12	30.64
44	15.05 - 8.8		54.85	3039.03	31.42
45	8.8 - 8.25		55.13	3056.32	31.47
46	8.25 - 8		55.27	3064.19	31.49
47	8 - 4.25		57.29	3182.98	31.90
48	4.25 - 4		57.45	3190.95	31.91
49	4 - 3		58.03	3222.91	32.03
50	3 - 2.75		58.19	3230.92	32.04
51	2.75 - 0		59.89	3319.45	32.37

Analysis Results

Elevation (ft)	Component Type	Size	Critical Element	% Capacity	Pass / Fail
156 - 151	Pole	TP10.75x10.75x0.365	Pole	3.2%	Pass
151 - 146	Pole	TP10.75x10.75x0.365	Pole	24.9%	Pass
146 - 144.5	Pole	TP10.75x10.75x0.365	Pole	32.0%	Pass
144.5 - 144	Pole	TP18x10.75x0.365	Pole	12.0%	Pass
144 - 139	Pole	TP18.944x18x0.25	Pole	38.5%	Pass
139 - 134	Pole	TP19.887x18.944x0.25	Pole	58.9%	Pass
134 - 129	Pole	TP20.831x19.887x0.25	Pole	76.2%	Pass
129 - 128.25	Pole	TP20.972x20.831x0.25	Pole	78.6%	Pass
128.25 - 128	Pole + Reinf.	TP21.019x20.972x0.575	Pole	35.8%	Pass
128 - 123	Pole + Reinf.	TP21.963x21.019x0.5625	Pole	43.6%	Pass
123 - 118	Pole + Reinf.	TP22.906x21.963x0.55	Pole	51.5%	Pass
118 - 113	Pole + Reinf.	TP23.85x22.906x0.525	Pole	59.7%	Pass
113 - 108	Pole + Reinf.	TP24.793x23.85x0.5125	Pole	67.2%	Pass
108 - 103	Pole + Reinf.	TP25.737x24.793x0.5	Pole	74.2%	Pass
103 - 98	Pole + Reinf.	TP26.68x25.737x0.4938	Pole	80.7%	Pass
98 - 96.5	Pole + Reinf.	TP27.624x26.68x0.4875	Pole	82.5%	Pass
96.5 - 92	Pole + Reinf.	TP27.313x26.464x0.7	Pole	64.9%	Pass
92 - 87	Pole + Reinf.	TP28.257x27.313x0.675	Pole	70.0%	Pass
87 - 82	Pole + Reinf.	TP29.201x28.257x0.65	Pole	75.1%	Pass
82 - 77.5	Pole + Reinf.	TP30.05x29.201x0.6375	Pole	79.6%	Pass
77.5 - 72.5	Pole + Reinf.	TP30.994x30.05x0.6875	Pole	74.0%	Pass
72.5 - 70.58	Pole + Reinf.	TP31.356x30.994x0.6875	Pole	75.3%	Pass
70.58 - 70.33	Pole + Reinf.	TP31.403x31.356x0.6875	Pole	75.4%	Pass
70.33 - 67.08	Pole + Reinf.	TP32.016x31.403x0.675	Pole	77.5%	Pass
67.08 - 66.83	Pole + Reinf.	TP32.063x32.016x0.975	Pole	55.6%	Pass
66.83 - 61.83	Pole + Reinf.	TP33.007x32.063x0.95	Pole	58.1%	Pass
61.83 - 61.75	Pole + Reinf.	TP33.824x33.007x0.95	Pole	58.1%	Pass
61.75 - 56.75	Pole + Reinf.	TP33.341x32.397x0.9375	Pole	62.1%	Pass
56.75 - 51.75	Pole + Reinf.	TP34.284x33.341x0.9125	Pole	64.4%	Pass
51.75 - 46.75	Pole + Reinf.	TP35.228x34.284x0.9	Pole	67.2%	Pass
46.75 - 41.75	Pole + Reinf.	TP36.171x35.228x0.8875	Pole	70.0%	Pass
41.75 - 39.8	Pole + Reinf.	TP36.539x36.171x0.875	Pole	71.1%	Pass
39.8 - 39.33	Pole + Reinf.	TP36.628x36.539x0.95	Pole	65.2%	Pass
39.33 - 39.08	Pole + Reinf.	TP36.675x36.628x0.9375	Pole	65.3%	Pass
39.08 - 38.33	Pole + Reinf.	TP36.816x36.675x0.9375	Pole	65.6%	Pass
38.33 - 38.08	Pole + Reinf.	TP36.864x36.816x0.8875	Pole	70.8%	Pass
38.08 - 33.08	Pole + Reinf.	TP37.807x36.864x0.875	Pole	72.7%	Pass
33.08 - 30.75	Pole + Reinf.	TP38.247x37.807x0.8625	Pole	73.6%	Pass
30.75 - 30.5	Pole + Reinf.	TP38.294x38.247x0.9375	Pole	68.0%	Pass
30.5 - 25.5	Pole + Reinf.	TP39.238x38.294x0.925	Pole	69.8%	Pass
25.5 - 20.5	Pole + Reinf.	TP40.182x39.238x0.9	Pole	71.5%	Pass
20.5 - 15.5	Pole + Reinf.	TP41.125x40.182x0.8875	Pole	73.1%	Pass
15.5 - 15.05	Pole + Reinf.	TP42.201x41.125x0.8875	Pole	73.3%	Pass
15.05 - 8.8	Pole + Reinf.	TP41.639x40.46x0.875	Pole	77.4%	Pass
8.8 - 8.25	Pole + Reinf.	TP41.743x41.639x0.875	Pole	77.6%	Pass
8.25 - 8	Pole + Reinf.	TP41.79x41.743x0.875	Pole	78.3%	Pass
8 - 4.25	Pole + Reinf.	TP42.498x41.79x0.875	Pole	79.8%	Pass
4.25 - 4	Pole + Reinf.	TP42.545x42.498x1.05	Pole	66.8%	Pass
4 - 3	Pole + Reinf.	TP42.734x42.545x1.05	Pole	67.2%	Pass
3 - 2.75	Pole + Reinf.	TP42.781x42.734x1.15	Pole	62.2%	Pass
2.75 - 0	Pole + Reinf.	TP43.3x42.781x1.125	Pole	63.2%	Pass
				Summary	
			Pole	82.5%	Pass
			Reinforcement	71.2%	Pass
			Overall	82.5%	Pass

Additional Calculations

Section Elevation (ft)	Moment of Inertia (in ⁴)			Area (in ²)			% Capacity*											
	Pole	Reinf.	Total	Pole	Reinf.	Total	Pole	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11
156 - 151	161	n/a	161	11.91	n/a	11.91	3.2%											
151 - 146	161	n/a	161	11.91	n/a	11.91	24.9%											
146 - 144.5	161	n/a	161	11.91	n/a	11.91	32.0%											
144.5 - 144	786	n/a	786	20.22	n/a	20.22	12.0%											
144 - 139	672	n/a	672	15.03	n/a	15.03	38.5%											
139 - 134	779	n/a	779	15.79	n/a	15.79	58.9%											
134 - 129	897	n/a	897	16.54	n/a	16.54	76.2%											
129 - 128.25	916	n/a	916	16.66	n/a	16.66	78.6%											
128.25 - 128	922	1119	2040	16.70	18.00	34.70	35.8%						31.2%					
128 - 123	1053	1214	2267	17.45	18.00	35.45	43.6%						37.9%					
123 - 118	1197	1314	2510	18.21	18.00	36.21	51.5%											
118 - 113	1352	1417	2770	18.97	18.00	36.97	59.7%											
113 - 108	1521	1525	3046	19.73	18.00	37.73	67.2%											
108 - 103	1703	1636	3340	20.49	18.00	38.49	74.2%											
103 - 98	1900	1752	3651	21.25	18.00	39.25	80.7%											
98 - 96.5	1961	1787	3749	21.47	18.00	39.47	82.5%											
96.5 - 92	2039	3349	5388	21.75	31.88	53.63	64.9%					52.5%						
92 - 87	2260	3567	5827	22.51	31.88	54.39	70.0%					56.1%						
87 - 82	2497	3792	6289	23.27	31.88	55.15	75.1%					59.5%						
82 - 77.5	2723	4001	6724	23.95	31.88	55.83	79.6%					62.5%						
77.5 - 72.5	3714	4240	7955	30.83	31.88	62.70	74.0%					59.6%						
72.5 - 70.58	3848	4334	8182	31.19	31.88	63.07	75.3%					60.6%						
70.58 - 70.33	3865	4346	8211	31.24	31.88	63.12	75.4%			60.7%	60.7%							
70.33 - 67.08	4098	4507	8606	31.86	31.88	63.73	77.5%			62.4%	62.4%							
67.08 - 66.83	4117	7946	12062	31.90	56.25	88.15	55.6%			44.7%	44.7%						47.1%	
66.83 - 61.83	4495	8394	12889	32.85	56.25	89.10	58.1%			46.7%	46.7%						49.2%	
61.83 - 61.75	4501	8401	12902	32.87	56.25	89.12	58.1%			46.7%	46.7%						49.2%	
61.75 - 56.75	4634	8555	13189	33.19	56.25	89.44	62.1%			49.9%	49.9%						52.5%	
56.75 - 51.75	5042	9021	14063	34.13	56.25	90.38	64.4%			51.7%	51.7%						54.5%	
51.75 - 46.75	5474	9498	14972	35.08	56.25	91.33	67.2%			53.5%	53.5%						56.4%	
46.75 - 41.75	5930	9989	15919	36.03	56.25	92.28	70.0%			55.2%	55.2%						58.2%	
41.75 - 39.8	6114	10183	16298	36.40	56.25	92.65	71.1%			55.9%	55.9%						58.9%	
39.8 - 39.33	7353	10230	17584	43.71	56.25	99.96	65.2%			52.3%	52.3%						55.1%	
39.33 - 39.08	7382	10256	17638	43.77	56.25	100.02	65.3%	54.4%			52.3%						55.1%	
39.08 - 38.33	7469	10331	17800	43.94	56.25	100.19	65.6%	54.6%			52.6%						55.4%	
38.33 - 38.08	7508	9475	16983	44.00	53.75	97.75	70.8%	54.8%	60.0%								59.1%	
38.08 - 33.08	8105	9944	18048	45.13	53.75	98.88	72.7%	56.4%	61.6%								60.6%	
33.08 - 30.75	8394	10166	18559	45.67	53.75	99.42	73.6%	57.0%	62.3%								61.4%	
30.75 - 30.5	8424	11712	20136	45.72	61.25	106.97	68.0%	53.0%	57.5%								56.0%	
30.5 - 25.5	9068	12269	21337	46.86	61.25	108.11	69.8%	54.4%	59.0%								57.4%	
25.5 - 20.5	9745	12838	22583	48.00	61.25	109.25	71.5%	55.7%	60.4%								58.8%	
20.5 - 15.5	10454	13421	23875	49.14	61.25	110.39	73.1%	56.9%	61.7%								60.1%	
15.5 - 15.05	10520	13474	23994	49.24	61.25	110.49	73.3%	57.1%	61.8%								60.2%	
15.05 - 8.8	10855	13744	24599	49.76	61.25	111.01	77.4%	60.1%	65.1%								63.4%	
8.8 - 8.25	10937	13810	24747	49.88	61.25	111.13	77.6%	60.2%	65.3%								63.5%	
8.25 - 8	10985	13756	24742	49.94	69.38	119.31	78.3%	60.1%									62.1%	
8 - 4.25	11558	14204	25761	50.79	69.38	120.17	79.8%	61.0%									63.0%	
4.25 - 4	11603	19429	31033	50.85	80.63	131.47	66.8%										51.1%	
4 - 3	11760	19585	31345	51.08	80.63	131.70	67.2%										51.4%	
3 - 2.75	11796	22374	34170	51.13	88.13	139.26	62.2%										51.3%	
2.75 - 0	12234	22861	35095	51.76	88.13	139.88	63.2%										51.9%	


Note: Section capacity checked in 5 degree increments.
Rating per TIA-222-H Section 15.5.

ASCE 7 Hazards Report

Address:
No Address at This Location

Standard: ASCE/SEI 7-10
Risk Category: II
Soil Class: D - Stiff Soil

Elevation: 538.27 ft (NAVD 88)
Latitude: 41.977706
Longitude: -71.855

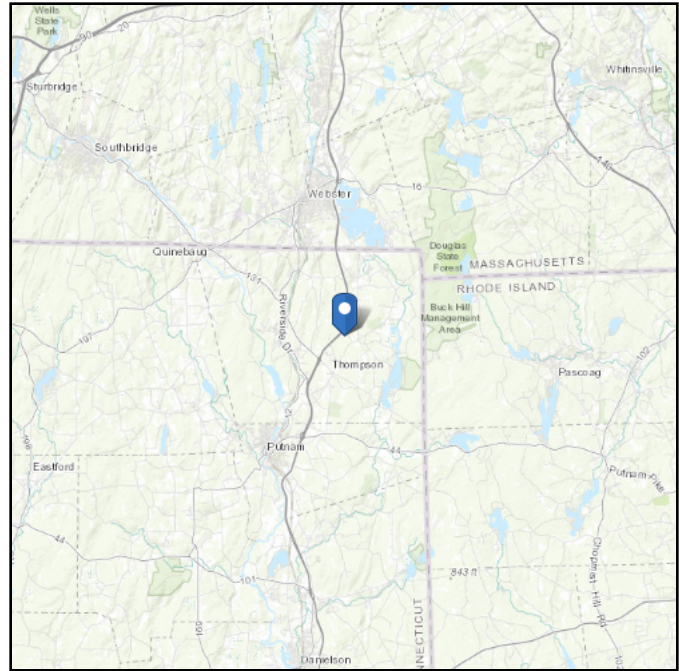

Wind

Results:

Wind Speed:	127 Vmph
10-year MRI	78 Vmph
25-year MRI	88 Vmph
50-year MRI	96 Vmph
100-year MRI	103 Vmph

Data Source: ASCE/SEI 7-10, Fig. 26.5-1A and Figs. CC-1–CC-4, incorporating errata of March 12, 2014

Date Accessed: Thu Nov 01 2018

Value provided is 3-second gust wind speeds at 33 ft above ground for Exposure C Category, based on linear interpolation between contours. Wind speeds are interpolated in accordance with the 7-10 Standard. Wind speeds correspond to approximately a 7% probability of exceedance in 50 years (annual exceedance probability = 0.00143, MRI = 700 years).



Mountainous terrain, gorges, ocean promontories, and special wind regions should be examined for unusual wind conditions.

Site Soil Class: D - Stiff Soil

Results:

S_S :	0.172	S_{DS} :	0.184
S_1 :	0.063	S_{D1} :	0.101
F_a :	1.600	T_L :	6.000
F_v :	2.400	PGA :	0.085
S_{MS} :	0.276	PGA _M :	0.136
S_{M1} :	0.151	F _{PGA} :	1.600
		I_e :	1

Seismic Design Category B

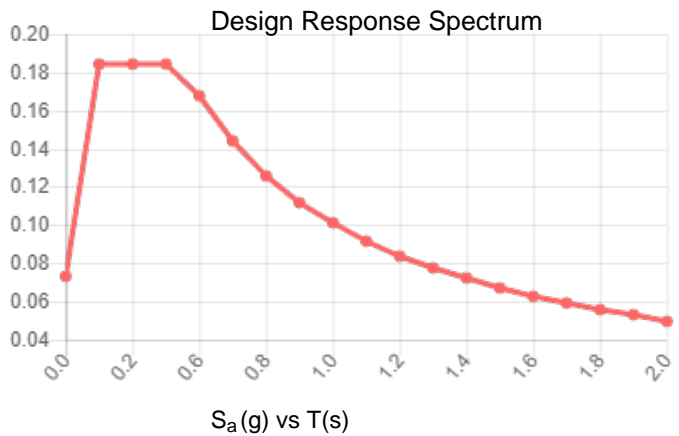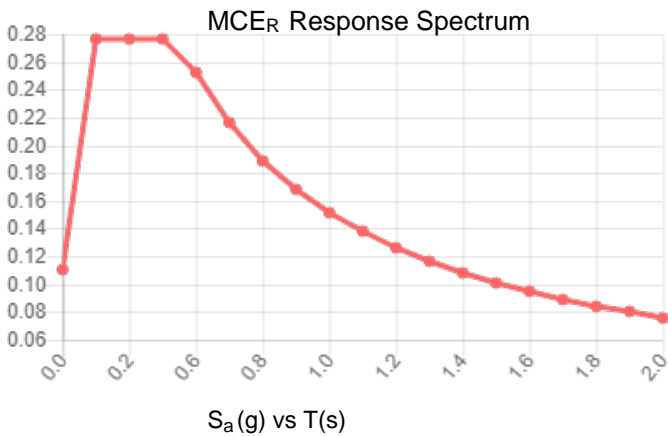

Data Accessed:

Thu Nov 01 2018

Date Source:

USGS Seismic Design Maps based on ASCE/SEI 7-10, incorporating Supplement 1 and errata of March 31, 2013, and ASCE/SEI 7-10 Table 1.5-2. Additional data for site-specific ground motion procedures in accordance with ASCE/SEI 7-10 Ch. 21 are available from USGS.

Ice

Results:

Ice Thickness: 0.75 in.
Concurrent Temperature: 15 F
Gust Speed: 50 mph

Data Source: Standard ASCE/SEI 7-10, Figs. 10-2 through 10-8

Date Accessed: Thu Nov 01 2018

Ice thicknesses on structures in exposed locations at elevations higher than the surrounding terrain and in valleys and gorges may exceed the mapped values.

Values provided are equivalent radial ice thicknesses due to freezing rain with concurrent 3-second gust speeds, for a 50-year mean recurrence interval, and temperatures concurrent with ice thicknesses due to freezing rain. Thicknesses for ice accretions caused by other sources shall be obtained from local meteorological studies. Ice thicknesses in exposed locations at elevations higher than the surrounding terrain and in valleys and gorges may exceed the mapped values.

The ASCE 7 Hazard Tool is provided for your convenience, for informational purposes only, and is provided “as is” and without warranties of any kind. The location data included herein has been obtained from information developed, produced, and maintained by third party providers; or has been extrapolated from maps incorporated in the ASCE 7 standard. While ASCE has made every effort to use data obtained from reliable sources or methodologies, ASCE does not make any representations or warranties as to the accuracy, completeness, reliability, currency, or quality of any data provided herein. Any third-party links provided by this Tool should not be construed as an endorsement, affiliation, relationship, or sponsorship of such third-party content by or from ASCE.

ASCE does not intend, nor should anyone interpret, the results provided by this Tool to replace the sound judgment of a competent professional, having knowledge and experience in the appropriate field(s) of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the contents of this Tool or the ASCE 7 standard.

In using this Tool, you expressly assume all risks associated with your use. Under no circumstances shall ASCE or its officers, directors, employees, members, affiliates, or agents be liable to you or any other person for any direct, indirect, special, incidental, or consequential damages arising from or related to your use of, or reliance on, the Tool or any information obtained therein. To the fullest extent permitted by law, you agree to release and hold harmless ASCE from any and all liability of any nature arising out of or resulting from any use of data provided by the ASCE 7 Hazard Tool.



Corporate Office
1800 Route 34, Suite 101
Wall, NJ 07719

Regional Offices
Hackettstown, NJ
New York, NY

Date: April 16, 2019

Structural Mount Analysis Report

Carrier Designation: **T-MOBILE**
Carrier Site Number: CT11160B
Carrier Site Name: Thompson/I-395 X99_1

Crown Castle Designation: **Crown Castle BU Number:** 828402
Crown Castle Site Name: Thompson/ I-395 X99_1
Crown Castle JDE Job Number: 363294
Crown Castle Application Number: 330748 Rev. 15

Engineering Firm Designation: **French and Parrello Associates Project Number:**
2438B.388

Site Data: **720 Thompson Rd. Thompson, CT – 06277**
Latitude 41° 58' 39.74", Longitude -71° 50' 47.55"
144.0 Foot – Monopole


French and Parrello Associates is pleased to submit this “**Structural Mount Analysis Report**” to determine the structural integrity of the above-mentioned carrier’s mounting system. This analysis has been performed in accordance with the Crown Castle Tower Mount Analysis scope of work document “ENG-SOW-10208”.

The purpose of the analysis is to determine acceptability of the antenna mount stress level. Based on our analysis, we have determined that the proposed platform (CommScope MC-PK12L4-B) is structurally adequate to support the proposed antenna configuration and loads.

Mount Analysis Result =	Sufficient
--------------------------------	-------------------

We at French and Parrello Associates appreciate the opportunity of providing our continuing professional services to Crown Castle. If you have any questions or need further assistance on this or any other projects, please give us a call.

Very truly yours,



John Bosco, PE | Senior Project Manager | CT Professional Engineer | License # 25605



Table of Contents

1.0 Introduction	3
2.0 Analysis Criteria	3
3.0 Analysis Procedure	4
4.0 Assumptions	4
5.0 Analysis Results	5
6.0 Recommendations	5

Attachments

- A. Software Model Diagrams
- B. Software Input Calculations
- C. Software Output Calculations
- D. Additional Calculations



1.0 Introduction

The purpose of this structural mount analysis is to assess the structural adequacy of the proposed platform (CommScope MC-PK12L4-B) at 143' MCL (143' ACL) on the existing 144.0' monopole tower.

2.0 Analysis Criteria

This analysis has been performed in accordance with the 2018 International Building Code (2018 CSC) based upon an ultimate 3-second gust wind speed converted to a nominal 3-second gust wind speed per section 1609.3.1 as required for use in the TIA-222-H Standard per Exception #5 of Section 1609.1.1. The Design Criteria used in the analyses is summarized as follows:

Site Location: Windham County, Connecticut
 Basic Wind Speed: 130 MPH 3-second wind gust wind speed without ice
 Wind Speed with Ice: 50 MPH 3-second wind gust with 1.275 in. radial ice
 Service Wind Speed: 60 MPH 3-second gust for serviceability
 Structure Class: II
 Exposure Category: C
 Topographic Category: 1 with crest height of 0 feet

Table 1 - Proposed Antenna Information

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Model	Mount Type	Note
143.0	143.0	3	RFS/CELWAVE / APX16DWV-16DWVS-E-A20	Proposed Platform	1
		3	RFS/CELWAVE / APXVAARR24_43-UNA20		
		3	ERICSSON / RADIO 4449 B12/B71		
		6	RFS/CELWAVE / ATMAA1412D-1A20		

Notes:

- 1) See Appendix B for equipment details.



3.0 Analysis Procedure

Table 3 - Documents Provided

Document	Remarks	Date	Source
CCI Application # 330748	Crown Castle	01/20/2016	CCISITES
Due Diligence Documents	Crown Castle	03/01/2019	CCISITES
CCI Site Photos	Crown Castle	11/07/2018	CCISITES

Dead loads, ice loads, and wind loads are calculated by an excel spreadsheet prepared by FPA, in accordance with the TIA-222-H Standard, as shown in Appendix B. The wind load is applied to the proposed mount in 30-degree increments, for 360 degrees around the proposed platform. Nominal concentrated man live loads of 500 lbs. (L_v) is applied at each mounting pipe location one at a time, and a nominal concentrated man live loads of 250 lbs. (L_M) is applied at the center of horizontal members one at a time. The following load combinations were utilized in this analysis:

- 1.4D
- 1.2D + 1.0 W_o
- 1.2D + 1.0 D_i + 1.0 W_i
- 1.2D + 1.5 L_M + 1.0 W_M
- 1.2D + 1.5 L_v

The proposed platform was analyzed using Bentley RAM Elements which calculates member forces and stresses based upon user input geometry and loading. Software model diagrams and output results are included in Appendix A and Appendix C.

4.0 Assumptions

1. The proposed installation of the antennas and associated equipment is in accordance with the Due Diligence documents by Crown Castle and site photos on CCI Sites.
2. The dimensional parameters, connection specifications, and member shapes for the proposed platform are based upon drawings and site photos on CCI Sites.
3. The proposed antenna and RRH equipment specifications are as provided in the CCI application.
4. It should be noted that the conclusion reached by FPA is expressly related to the antenna support structure and assumes that the structure and components are in good condition and are being maintained and inspected at regular intervals in accordance with industry standards. FPA assumes no responsibility for any failure resulting from installations that do not conform to the design drawings or from hidden defects within the existing support structure resulting from aging or damaged components.



5. Steel Specifications:

The following steel specifications were assumed for all mount components:

- Pipes – ASTM A53 Gr. B (fy = 35 ksi)
- HSS – ASTM A500 Gr. B (fy = 46 ksi)

All structural bolts were assumed to be ASTM A325 steel. All threaded rods and U-Bolts were assumed to be ASTM A307 steel.

This analysis may be affected if any assumptions are not valid or have been made in error. FPA should be notified if any discrepancy is discovered between the actual conditions and the assumptions stated above.

5.0 Analysis Results

Complete analysis results are included in Appendix C. Below is a summary of the member capacity ratings:

Table 4 – Section Capacity

Section Type	Description	% Capacity	Pass/Fail
PIPE 2-1/2x0.203	Pipe Masts	36.49	Pass
PIPE 4x0.237	Horizontal Members	23.77	Pass
HSS 4x4x1/4	Platform Supporting Members	50.33	Pass


Mount Rating (max from all components) =	50.33 %
---	----------------

6.0 Recommendations


Based upon the Design Criteria and assumptions stated in this report, we have found that the proposed platform (CommScope MC-PK12L4-B) is structurally sufficient to support the proposed antenna configuration and loads. No additional changes are required at this time.

APPENDIX A

SOFTWARE MODEL DIAGRAMS

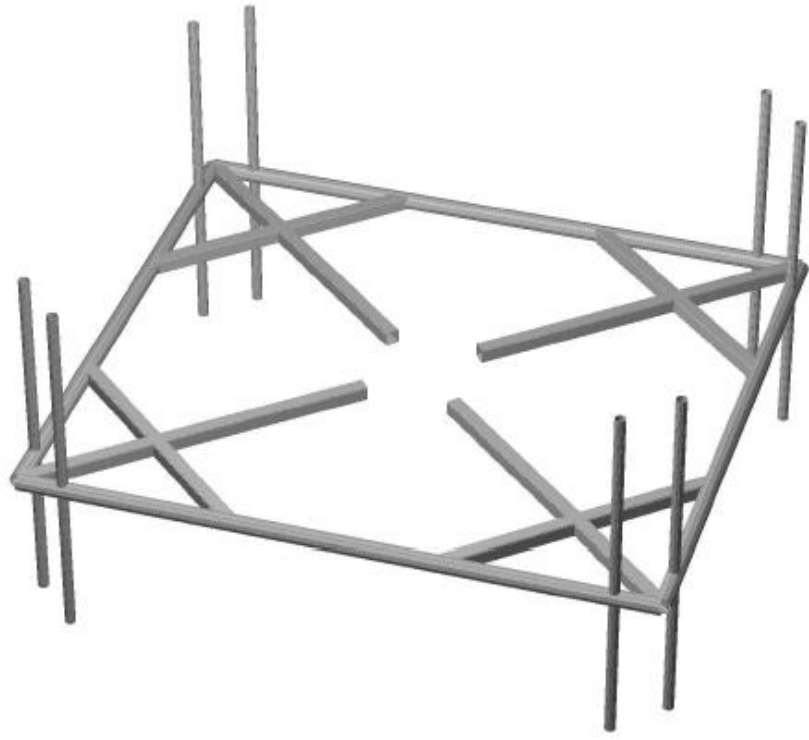


RENDERING

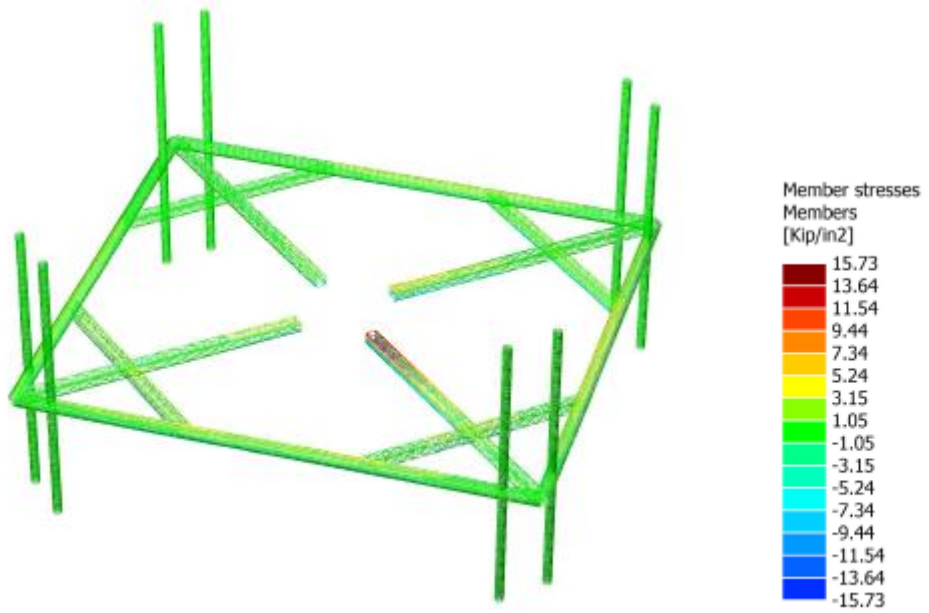

STRESS DIAGRAM

APPENDIX B

SOFTWARE INPUT CALCULATIONS

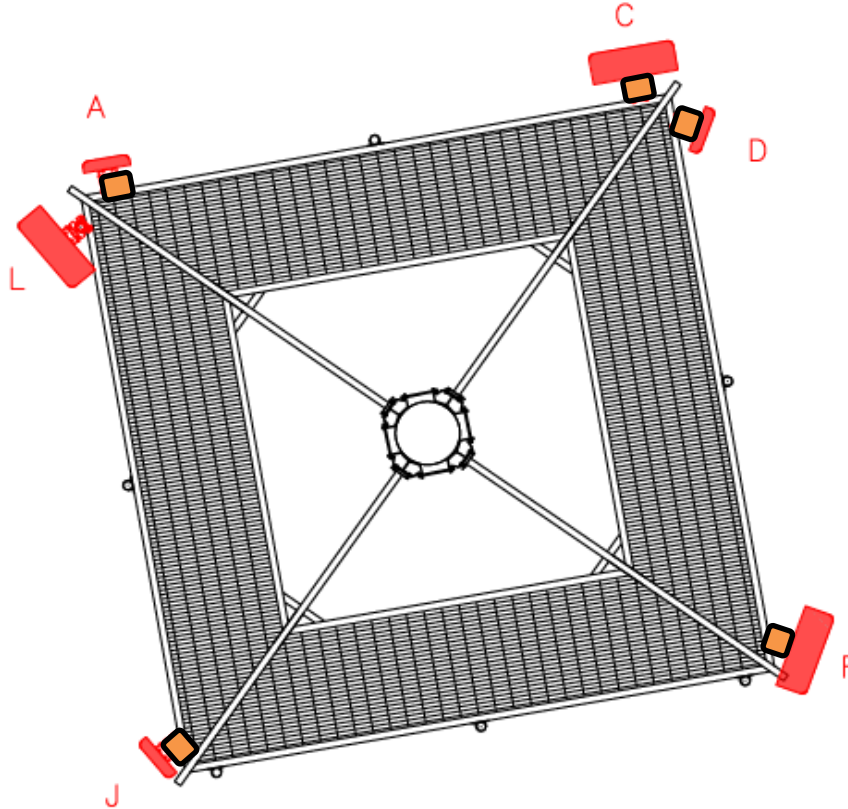

Typ. Proposed Antenna Configuration Plan

Mount Loading Schedule					
Appurtenance	Weight		Wind Load		Quantity
	w/o Ice	w/ Ice	w/o Ice	w/ Ice	
RFS/CELWAVE / APX16DWV-16DWVS-E-A20	40.7 lbs	135.9 lbs	405.4 lbs	74.7 lbs	3
RFS/CELWAVE / APXVAARR24_43-UNA20	128.0 lbs	432.0 lbs	1255.0 lbs	210.8 lbs	3
ERICSSON / RADIO 4449 B12/B71	75.0 lbs	121.2 lbs	107.5 lbs	22.2 lbs	3
RFS/CELWAVE / ATMAA1412D-1A20	13.0 lbs	36.2 lbs	65.4 lbs	14.7 lbs	6

Total Apurtenance Weight Per Sector							Total Weight	
Alpha		Beta		Gamma		All Sectors		
w/o Ice	w/ Ice	w/o Ice	w/ Ice	w/o Ice	w/ Ice	w/o Ice	w/ Ice	
344.70	883 lbs	270 lbs	762 lbs	182 lbs	604 lbs	796 lbs	2249 lbs	



Design Criteria*			
Height =	143.0 ft	Kz =	1.36
Full Wind Speed =	130 mph	Kzt =	1.00
Wind Speed w/ Ice =	50 mph	Kd =	0.95
Exposure =	C	I =	1.00
Radial Ice =	1.28 in	G =	1.00
Ice Density =	56 lb/ft ³	Full WL =	78.5 psf
Cf =	1.40	WL w/ice =	11.6 psf
		WL @ 30mph =	4.2 psf

*Design criteria as per TIA-222-H and 2018 CSC (CT)

RFS/CELWAVE / APX16DWV-16DWVS-E-A20

Height:	55.9 in	Weight w/o Ice:	40.7 lbs
Width:	13.3 in	Ice Weight:	95.2 lbs
Depth:	3.2 in		
Frontal Area w/o Ice:	5.16 SF	Full Wind Load:	405.4 lbs
Frontal Area w/ Ice:	6.43 SF	Wind Load w/ Ice:	74.7 lbs
		Wind Load @ 30mph:	21.6 lbs

RFS/CELWAVE / APXVAARR24_43-UNA20

Height:	95.9 in	Weight w/o Ice:	128.0 lbs
Width:	24.0 in	Ice Weight:	304.0 lbs
Depth:	8.7 in		
Frontal Area w/o Ice:	15.98 SF	Full Wind Load:	1255.0 lbs
Frontal Area w/ Ice:	18.15 SF	Wind Load w/ Ice:	210.8 lbs
		Wind Load @ 30mph:	66.8 lbs

ERICSSON / RADIO 4449 B12/B71

Height:	15.0 in	Weight w/o Ice:	75.0 lbs
Width:	13.2 in	Ice Weight:	46.2 lbs
Depth:	9.3 in		
Frontal Area w/o Ice:	1.37 SF	Full Wind Load:	107.5 lbs
Frontal Area w/ Ice:	1.91 SF	Wind Load w/ Ice:	22.2 lbs
		Wind Load @ 30mph:	5.7 lbs

RFS/CELWAVE / ATMAA1412D-1A20

Height:	12.0 in	Weight w/o Ice:	13.0 lbs
Width:	10.0 in	Ice Weight:	23.2 lbs
Depth:	4.0 in		
Frontal Area w/o Ice:	0.83 SF	Full Wind Load:	65.4 lbs
Frontal Area w/ Ice:	1.27 SF	Wind Load w/ Ice:	14.7 lbs
		Wind Load @ 30mph:	3.5 lbs


APPENDIX C

SOFTWARE OUTPUT CALCULATIONS

Analysis result

Envelope for nodal reactions

Note.- Ic is the controlling load condition



Direction of positive forces and moments

Envelope of nodal reactions for :

- C1=1.4D
- C2=1.2D+W0
- C3=1.2D+W30
- C4=1.2D+W60
- C5=1.2D+W90
- C6=1.2D+W120
- C7=1.2D+W150
- C8=1.2D-W0
- C9=1.2D-W30
- C10=1.2D-W60
- C11=1.2D-W90
- C12=1.2D-W120
- C13=1.2D-W150
- C14=1.2D+I+W0
- C15=1.2D+I+W30
- C16=1.2D+I+W60
- C17=1.2D+I+W90
- C18=1.2D+I+W120
- C19=1.2D+I+W150
- C20=1.2D+I-W0
- C21=1.2D+I-W30
- C22=1.2D+I-W60
- C23=1.2D+I-W90
- C24=1.2D+I-W120
- C25=1.2D+I-W150
- C26=1.2D+1.5LM+LV
- C27=1.2D+1.5LM+WM0
- C28=1.2D+1.5LM+WM30
- C29=1.2D+1.5LM+WM60
- C30=1.2D+1.5LM+WM90
- C31=1.2D+1.5LM+WM120
- C32=1.2D+1.5LM-LV
- C33=1.2D+1.5LM-WM0
- C34=1.2D+1.5LM-WM30
- C35=1.2D+1.5LM-WM60
- C36=1.2D+1.5LM-WM90
- C37=1.2D+1.5LM-WM120
- C38=1.2D+1.5LV

Node		Forces						Moments					
		Fx Ic	Fy Ic	Fz Ic	Mx Ic	My Ic	Mz Ic	[Kip]	[Kip]	[Kip]	[Kip*ft]	[Kip*ft]	[Kip*ft]
17	Max	2.368 C4	0.772 C15	1.332 C3	2.70664 C15	2.08756 C10	-0.31319 C26						

	Min	-2.368	C10	0.062	C26	-1.332	C9	0.34553	C9	-2.08756	C4	-2.69752	C16
18	Max	2.288	C6	1.004	C25	1.888	C13	3.14896	C25	2.23712	C10	3.47247	C24
	Min	-2.288	C12	0.246	C7	-1.888	C7	0.52053	C7	-2.23712	C4	0.61894	C6
19	Max	1.388	C3	1.113	C26	1.794	C3	-0.05309	C3	1.80536	C10	3.97020	C26
	Min	-1.388	C9	0.084	C3	-1.794	C9	-3.70874	C26	-1.80536	C4	0.26673	C4
20	Max	1.458	C7	0.328	C26	1.392	C12	0.43689	C13	1.91691	C10	0.37629	C12
	Min	-1.458	C13	-0.104	C13	-1.392	C6	-0.96918	C26	-1.91691	C4	-0.68374	C6

Maximum relative deflections

Remark.- Magnitude of deflections in absolute value.

CONDITION C1=1.4D

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	62.50000
33	0.00096 (< L/10000)	37.50000	0.00000 (< L/10000)	75.00000
36	0.02337 (L/4094)	62.50000	0.00000 (< L/10000)	75.00000
1	0.07288 (L/2058)	50.00000	0.00000 (< L/10000)	62.50000
2	0.07102 (L/2365)	50.00000	0.00000 (< L/10000)	50.00000
3	0.04878 (L/3075)	50.00000	0.00000 (< L/10000)	50.00000
4	0.11060 (L/1519)	50.00000	0.00000 (< L/10000)	12.50000
37	0.03042 (L/3145)	62.50000	0.00000 (< L/10000)	37.50000
38	0.03392 (L/2820)	62.50000	0.00000 (< L/10000)	87.50000
49	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	75.00000
50	0.00000 (< L/10000)	25.00000	0.00000 (< L/10000)	62.50000
51	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	62.50000
52	0.00000 (< L/10000)	25.00000	0.00000 (< L/10000)	75.00000
54	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	75.00000
104	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	25.00000
105	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	75.00000
110	0.00903 (L/8315)	50.00000	0.00000 (< L/10000)	50.00000
111	0.01690 (L/4441)	50.00000	0.00000 (< L/10000)	50.00000
112	0.00780 (L/9631)	50.00000	0.00000 (< L/10000)	37.50000
113	0.00956 (L/7856)	50.00000	0.00000 (< L/10000)	37.50000

CONDITION C2=1.2D+W0

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.01310 (L/7329)	50.00000	0.00000 (< L/10000)	75.00000
33	0.00848 (< L/10000)	62.50000	0.00488 (< L/10000)	75.00000
36	0.00506 (< L/10000)	75.00000	0.00668 (< L/10000)	75.00000
1	0.07749 (L/1936)	37.50000	0.00737 (< L/10000)	62.50000
2	0.03442 (L/4881)	50.00000	0.00663 (< L/10000)	62.50000
3	0.06945 (L/2160)	37.50000	0.00696 (< L/10000)	37.50000
4	0.11766 (L/1428)	50.00000	0.00771 (< L/10000)	37.50000
37	0.04411 (L/2169)	62.50000	0.00693 (< L/10000)	75.00000
38	0.04756 (L/2012)	62.50000	0.00702 (< L/10000)	37.50000
49	0.00423 (< L/10000)	50.00000	0.00000 (< L/10000)	75.00000
50	0.01310 (L/7329)	50.00000	0.00000 (< L/10000)	62.50000
51	0.00423 (< L/10000)	50.00000	0.00000 (< L/10000)	62.50000
52	0.01310 (L/7329)	50.00000	0.00000 (< L/10000)	75.00000
54	0.00423 (< L/10000)	50.00000	0.00000 (< L/10000)	62.50000
104	0.00000 (< L/10000)	37.50000	0.00000 (< L/10000)	75.00000
105	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	37.50000
110	0.01223 (L/6139)	50.00000	0.00162 (< L/10000)	37.50000
111	0.01989 (L/3774)	50.00000	0.00206 (< L/10000)	37.50000
112	0.00547 (< L/10000)	50.00000	0.00193 (< L/10000)	62.50000
113	0.00440 (< L/10000)	62.50000	0.00196 (< L/10000)	62.50000

CONDITION C3=1.2D+W30

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
--------	----------------	------	----------------	------

30	0.01134	(L/8462)	50.00000	0.00655	(< L/10000)	50.00000
33	0.00370	(< L/10000)	50.00000	0.01028	(L/9307)	75.00000
36	0.00286	(< L/10000)	25.00000	0.01245	(L/7683)	75.00000
1	0.06777	(L/2213)	37.50000	0.01197	(< L/10000)	62.50000
2	0.03014	(L/5573)	50.00000	0.01164	(< L/10000)	75.00000
3	0.07293	(L/2057)	50.00000	0.00694	(< L/10000)	37.50000
4	0.11090	(L/1515)	50.00000	0.00748	(< L/10000)	37.50000
37	0.05090	(L/1880)	62.50000	0.01085	(L/8814)	75.00000
38	0.03542	(L/2701)	62.50000	0.00925	(< L/10000)	87.50000
49	0.00366	(< L/10000)	50.00000	0.00212	(< L/10000)	50.00000
50	0.01134	(L/8462)	50.00000	0.00655	(< L/10000)	50.00000
51	0.00366	(< L/10000)	50.00000	0.00212	(< L/10000)	50.00000
52	0.01134	(L/8462)	50.00000	0.00655	(< L/10000)	50.00000
54	0.00366	(< L/10000)	50.00000	0.00212	(< L/10000)	50.00000
104	0.00000	(< L/10000)	25.00000	0.00000	(< L/10000)	50.00000
105	0.00000	(< L/10000)	62.50000	0.00000	(< L/10000)	75.00000
110	0.01382	(L/5431)	50.00000	0.00264	(< L/10000)	37.50000
111	0.01697	(L/4423)	50.00000	0.00186	(< L/10000)	37.50000
112	0.00188	(< L/10000)	37.50000	0.00279	(< L/10000)	75.00000
113	0.00807	(L/9306)	62.50000	0.00217	(< L/10000)	75.00000

CONDITION C4=1.2D+W60

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00655	(< L/10000)	50.00000	0.01134 (L/8462) 50.00000
33	0.00266	(< L/10000)	75.00000	0.01291 (L/7410) 75.00000
36	0.00263	(< L/10000)	25.00000	0.01488 (L/6431) 75.00000
1	0.05595	(L/2681)	37.50000	0.01414 (< L/10000) 75.00000
2	0.03545	(L/4739)	37.50000	0.01379 (< L/10000) 75.00000
3	0.06951	(L/2158)	50.00000	0.00828 (< L/10000) 75.00000
4	0.09982	(L/1683)	50.00000	0.00525 (< L/10000) 37.50000
37	0.05103	(L/1875)	62.50000	0.01186 (L/8065) 75.00000
38	0.02176	(L/4397)	75.00000	0.01142 (L/8379) 87.50000
49	0.00212	(< L/10000)	50.00000	0.00366 (< L/10000) 50.00000
50	0.00655	(< L/10000)	50.00000	0.01134 (L/8462) 50.00000
51	0.00212	(< L/10000)	50.00000	0.00366 (< L/10000) 50.00000
52	0.00655	(< L/10000)	50.00000	0.01134 (L/8462) 50.00000
54	0.00212	(< L/10000)	50.00000	0.00366 (< L/10000) 50.00000
104	0.00000	(< L/10000)	75.00000	0.00000 (< L/10000) 25.00000
105	0.00000	(< L/10000)	25.00000	0.00000 (< L/10000) 62.50000
110	0.01379	(L/5445)	50.00000	0.00294 (< L/10000) 37.50000
111	0.01340	(L/5604)	50.00000	0.00248 (< L/10000) 75.00000
112	0.00068	(< L/10000)	62.50000	0.00303 (< L/10000) 75.00000
113	0.01195	(L/6281)	50.00000	0.00226 (< L/10000) 25.00000

CONDITION C5=1.2D+W90

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00000	(< L/10000)	25.00000	0.01310 (L/7329) 50.00000
33	0.00765	(< L/10000)	75.00000	0.01209 (L/7916) 75.00000
36	0.00619	(< L/10000)	75.00000	0.01332 (L/7185) 75.00000
1	0.04632	(L/3238)	50.00000	0.01292 (< L/10000) 75.00000
2	0.04671	(L/3597)	37.50000	0.01224 (< L/10000) 75.00000
3	0.05866	(L/2557)	50.00000	0.00851 (< L/10000) 75.00000
4	0.08801	(L/1909)	37.50000	0.00609 (< L/10000) 62.50000
37	0.04446	(L/2152)	62.50000	0.01012 (L/9456) 87.50000
38	0.01141	(L/8386)	75.00000	0.01100 (L/8694) 75.00000
49	0.00000	(< L/10000)	75.00000	0.00423 (< L/10000) 50.00000
50	0.00000	(< L/10000)	75.00000	0.01310 (L/7329) 50.00000
51	0.00000	(< L/10000)	87.50000	0.00423 (< L/10000) 50.00000
52	0.00000	(< L/10000)	75.00000	0.01310 (L/7329) 50.00000
54	0.00000	(< L/10000)	25.00000	0.00423 (< L/10000) 50.00000
104	0.00000	(< L/10000)	75.00000	0.00000 (< L/10000) 62.50000
105	0.00000	(< L/10000)	50.00000	0.00000 (< L/10000) 62.50000
110	0.01213	(L/6192)	50.00000	0.00246 (< L/10000) 37.50000
111	0.01011	(L/7427)	50.00000	0.00281 (< L/10000) 75.00000
112	0.00097	(< L/10000)	50.00000	0.00246 (< L/10000) 75.00000
113	0.01486	(L/5052)	50.00000	0.00262 (< L/10000) 25.00000

CONDITION C6=1.2D+W120

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00655 (< L/10000)	50.00000	0.01134 (L/8462)	50.00000
33	0.01069 (L/8947)	75.00000	0.00803 (< L/10000)	75.00000
36	0.01547 (L/6184)	62.50000	0.00819 (< L/10000)	75.00000
1	0.04262 (L/3519)	50.00000	0.00824 (< L/10000)	75.00000
2	0.06060 (L/2772)	50.00000	0.00742 (< L/10000)	75.00000
3	0.04330 (L/3464)	50.00000	0.00702 (< L/10000)	62.50000
4	0.07712 (L/2178)	37.50000	0.00749 (< L/10000)	62.50000
37	0.03297 (L/2902)	62.50000	0.00706 (< L/10000)	37.50000
38	0.00555 (< L/10000)	75.00000	0.00793 (< L/10000)	75.00000
49	0.00212 (< L/10000)	50.00000	0.00366 (< L/10000)	50.00000
50	0.00655 (< L/10000)	50.00000	0.01134 (L/8462)	50.00000
51	0.00212 (< L/10000)	50.00000	0.00366 (< L/10000)	50.00000
52	0.00655 (< L/10000)	50.00000	0.01134 (L/8462)	50.00000
54	0.00212 (< L/10000)	50.00000	0.00366 (< L/10000)	50.00000
104	0.00000 (< L/10000)	37.50000	0.00000 (< L/10000)	25.00000
105	0.00000 (< L/10000)	25.00000	0.00000 (< L/10000)	50.00000
110	0.00929 (L/8081)	50.00000	0.00132 (< L/10000)	37.50000
111	0.00799 (L/9395)	50.00000	0.00253 (< L/10000)	62.50000
112	0.00066 (< L/10000)	50.00000	0.00159 (< L/10000)	25.00000
113	0.01598 (L/4697)	50.00000	0.00229 (< L/10000)	37.50000

CONDITION C7=1.2D+W150

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.01134 (L/8462)	50.00000	0.00655 (< L/10000)	50.00000
33	0.01095 (L/8737)	75.00000	0.00198 (< L/10000)	62.50000
36	0.02639 (L/3626)	62.50000	0.00096 (< L/10000)	62.50000
1	0.04425 (L/3390)	50.00000	0.00547 (< L/10000)	37.50000
2	0.07599 (L/2211)	50.00000	0.00346 (< L/10000)	25.00000
3	0.02948 (L/5089)	62.50000	0.00512 (< L/10000)	37.50000
4	0.07129 (L/2357)	50.00000	0.00694 (< L/10000)	50.00000
37	0.01965 (L/4868)	62.50000	0.00527 (< L/10000)	37.50000
38	0.00576 (< L/10000)	75.00000	0.00447 (< L/10000)	50.00000
49	0.00366 (< L/10000)	50.00000	0.00212 (< L/10000)	50.00000
50	0.01134 (L/8462)	50.00000	0.00655 (< L/10000)	50.00000
51	0.00366 (< L/10000)	50.00000	0.00212 (< L/10000)	50.00000
52	0.01134 (L/8462)	50.00000	0.00655 (< L/10000)	50.00000
54	0.00366 (< L/10000)	50.00000	0.00212 (< L/10000)	50.00000
104	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	25.00000
105	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	75.00000
110	0.00604 (< L/10000)	50.00000	0.00084 (< L/10000)	62.50000
111	0.00762 (L/9855)	50.00000	0.00191 (< L/10000)	50.00000
112	0.00390 (< L/10000)	50.00000	0.00092 (< L/10000)	25.00000
113	0.01502 (L/4999)	50.00000	0.00175 (< L/10000)	50.00000

CONDITION C8=1.2D-W0

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.01310 (L/7329)	50.00000	0.00000 (< L/10000)	12.50000
33	0.00836 (< L/10000)	75.00000	0.00488 (< L/10000)	75.00000
36	0.03561 (L/2687)	62.50000	0.00668 (< L/10000)	75.00000
1	0.05090 (L/2947)	62.50000	0.00737 (< L/10000)	62.50000
2	0.08734 (L/1924)	50.00000	0.00663 (< L/10000)	62.50000
3	0.01901 (L/7890)	62.50000	0.00696 (< L/10000)	37.50000
4	0.07194 (L/2335)	50.00000	0.00771 (< L/10000)	37.50000
37	0.00886 (< L/10000)	75.00000	0.00693 (< L/10000)	75.00000
38	0.01200 (L/7976)	75.00000	0.00702 (< L/10000)	37.50000
49	0.00423 (< L/10000)	50.00000	0.00000 (< L/10000)	62.50000
50	0.01310 (L/7329)	50.00000	0.00000 (< L/10000)	62.50000
51	0.00423 (< L/10000)	50.00000	0.00000 (< L/10000)	62.50000
52	0.01310 (L/7329)	50.00000	0.00000 (< L/10000)	75.00000
54	0.00423 (< L/10000)	50.00000	0.00000 (< L/10000)	12.50000

104	0.00000	(< L/10000)	25.00000	0.00000	(< L/10000)	62.50000
105	0.00000	(< L/10000)	62.50000	0.00000	(< L/10000)	25.00000
110	0.00325	(< L/10000)	50.00000	0.00162	(< L/10000)	37.50000
111	0.00909	(L/8259)	50.00000	0.00206	(< L/10000)	37.50000
112	0.00789	(L/9511)	50.00000	0.00193	(< L/10000)	62.50000
113	0.01222	(L/6143)	50.00000	0.00196	(< L/10000)	62.50000

CONDITION C9=1.2D-W30

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.01134 (L/8462)	50.00000	0.00655 (< L/10000)	50.00000
33	0.00362 (< L/10000)	75.00000	0.01028 (L/9307)	75.00000
36	0.04066 (L/2353)	62.50000	0.01245 (L/7683)	75.00000
1	0.06042 (L/2483)	50.00000	0.01197 (< L/10000)	62.50000
2	0.09161 (L/1834)	50.00000	0.01164 (< L/10000)	75.00000
3	0.01350 (< L/10000)	62.50000	0.00694 (< L/10000)	37.50000
4	0.07870 (L/2135)	50.00000	0.00748 (< L/10000)	37.50000
37	0.00331 (< L/10000)	25.00000	0.01085 (L/8814)	75.00000
38	0.02273 (L/4209)	62.50000	0.00925 (< L/10000)	87.50000
49	0.00366 (< L/10000)	50.00000	0.00212 (< L/10000)	50.00000
50	0.01134 (L/8462)	50.00000	0.00655 (< L/10000)	50.00000
51	0.00366 (< L/10000)	50.00000	0.00212 (< L/10000)	50.00000
52	0.01134 (L/8462)	50.00000	0.00655 (< L/10000)	50.00000
54	0.00366 (< L/10000)	50.00000	0.00212 (< L/10000)	50.00000
104	0.00000 (< L/10000)	50.00000	0.00000 (< L/10000)	25.00000
105	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	50.00000
110	0.00179 (< L/10000)	62.50000	0.00264 (< L/10000)	37.50000
111	0.01201 (L/6253)	50.00000	0.00186 (< L/10000)	37.50000
112	0.01156 (L/6493)	50.00000	0.00279 (< L/10000)	75.00000
113	0.00834 (L/8999)	50.00000	0.00217 (< L/10000)	75.00000

CONDITION C10=1.2D-W60

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00655 (< L/10000)	50.00000	0.01134 (L/8462)	50.00000
33	0.00267 (< L/10000)	50.00000	0.01291 (L/7410)	75.00000
36	0.04018 (L/2381)	62.50000	0.01488 (L/6431)	75.00000
1	0.07060 (L/2125)	50.00000	0.01414 (< L/10000)	75.00000
2	0.08765 (L/1917)	50.00000	0.01379 (< L/10000)	75.00000
3	0.01443 (< L/10000)	62.50000	0.00828 (< L/10000)	75.00000
4	0.09165 (L/1833)	62.50000	0.00525 (< L/10000)	37.50000
37	0.00352 (< L/10000)	25.00000	0.01186 (L/8065)	75.00000
38	0.03654 (L/2618)	62.50000	0.01142 (L/8379)	87.50000
49	0.00212 (< L/10000)	50.00000	0.00366 (< L/10000)	50.00000
50	0.00655 (< L/10000)	50.00000	0.01134 (L/8462)	50.00000
51	0.00212 (< L/10000)	50.00000	0.00366 (< L/10000)	50.00000
52	0.00655 (< L/10000)	50.00000	0.01134 (L/8462)	50.00000
54	0.00212 (< L/10000)	50.00000	0.00366 (< L/10000)	50.00000
104	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	50.00000
105	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	62.50000
110	0.00196 (< L/10000)	62.50000	0.00294 (< L/10000)	37.50000
111	0.01558 (L/4818)	50.00000	0.00248 (< L/10000)	75.00000
112	0.01392 (L/5394)	50.00000	0.00303 (< L/10000)	75.00000
113	0.00450 (< L/10000)	37.50000	0.00226 (< L/10000)	25.00000

CONDITION C11=1.2D-W90

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00000 (< L/10000)	62.50000	0.01310 (L/7329)	50.00000
33	0.00769 (< L/10000)	62.50000	0.01209 (L/7916)	75.00000
36	0.03429 (L/2790)	62.50000	0.01332 (L/7185)	75.00000
1	0.07862 (L/1908)	50.00000	0.01292 (< L/10000)	75.00000
2	0.07802 (L/2153)	62.50000	0.01224 (< L/10000)	75.00000
3	0.02496 (L/6010)	50.00000	0.00851 (< L/10000)	75.00000
4	0.10415 (L/1613)	62.50000	0.00609 (< L/10000)	62.50000
37	0.00866 (< L/10000)	75.00000	0.01012 (L/9456)	87.50000

38	0.04837	(L/1978)	62.50000	0.01100	(L/8694)	75.00000
49	0.00000	(< L/10000)	75.00000	0.00423	(< L/10000)	50.00000
50	0.00000	(< L/10000)	37.50000	0.01310	(L/7329)	50.00000
51	0.00000	(< L/10000)	25.00000	0.00423	(< L/10000)	50.00000
52	0.00000	(< L/10000)	25.00000	0.01310	(L/7329)	50.00000
54	0.00000	(< L/10000)	75.00000	0.00423	(< L/10000)	50.00000
104	0.00000	(< L/10000)	62.50000	0.00000	(< L/10000)	75.00000
105	0.00000	(< L/10000)	75.00000	0.00000	(< L/10000)	62.50000
110	0.00365	(< L/10000)	62.50000	0.00246	(< L/10000)	37.50000
111	0.01887	(L/3978)	50.00000	0.00281	(< L/10000)	75.00000
112	0.01434	(L/5237)	50.00000	0.00246	(< L/10000)	75.00000
113	0.00171	(< L/10000)	37.50000	0.00262	(< L/10000)	25.00000

CONDITION C12=1.2D-W120

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00655	(< L/10000)	0.01134	(L/8462)
33	0.01084	(L/8823)	0.00803	(< L/10000)
36	0.02458	(L/3892)	0.00819	(< L/10000)
1	0.08232	(L/1822)	0.00824	(< L/10000)
2	0.06323	(L/2657)	0.00742	(< L/10000)
3	0.04155	(L/3610)	0.00702	(< L/10000)
4	0.11267	(L/1491)	0.00749	(< L/10000)
37	0.01917	(L/4990)	0.00706	(< L/10000)
38	0.05504	(L/1738)	0.00793	(< L/10000)
49	0.00212	(< L/10000)	0.00366	(< L/10000)
50	0.00655	(< L/10000)	0.01134	(L/8462)
51	0.00212	(< L/10000)	0.00366	(< L/10000)
52	0.00655	(< L/10000)	0.01134	(L/8462)
54	0.00212	(< L/10000)	0.00366	(< L/10000)
104	0.00000	(< L/10000)	0.00000	(< L/10000)
105	0.00000	(< L/10000)	0.00000	(< L/10000)
110	0.00640	(< L/10000)	0.00132	(< L/10000)
111	0.02099	(L/3577)	0.00253	(< L/10000)
112	0.01270	(L/5909)	0.00159	(< L/10000)
113	0.00060	(< L/10000)	0.00229	(< L/10000)

CONDITION C13=1.2D-W150

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.01134	(L/8462)	0.00655	(< L/10000)
33	0.01113	(L/8593)	0.00198	(< L/10000)
36	0.01367	(L/6999)	0.00096	(< L/10000)
1	0.08251	(L/1818)	0.00547	(< L/10000)
2	0.04682	(L/3588)	0.00346	(< L/10000)
3	0.05799	(L/2587)	0.00512	(< L/10000)
4	0.11832	(L/1420)	0.00694	(< L/10000)
37	0.03249	(L/2945)	0.00527	(< L/10000)
38	0.05474	(L/1748)	0.00447	(< L/10000)
49	0.00366	(< L/10000)	0.00212	(< L/10000)
50	0.01134	(L/8462)	0.00655	(< L/10000)
51	0.00366	(< L/10000)	0.00212	(< L/10000)
52	0.01134	(L/8462)	0.00655	(< L/10000)
54	0.00366	(< L/10000)	0.00212	(< L/10000)
104	0.00000	(< L/10000)	0.00000	(< L/10000)
105	0.00000	(< L/10000)	0.00000	(< L/10000)
110	0.00946	(L/7932)	0.00084	(< L/10000)
111	0.02136	(L/3514)	0.00191	(< L/10000)
112	0.00946	(L/7933)	0.00092	(< L/10000)
113	0.00162	(< L/10000)	0.00175	(< L/10000)

CONDITION C14=1.2D+I+W10

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00220	(< L/10000)	0.00000	(< L/10000)
33	0.00192	(< L/10000)	0.00077	(< L/10000)

36	0.04578	(L/2090)	62.50000	0.00108	(< L/10000)	75.00000
1	0.15575	(L/963)	50.00000	0.00122	(< L/10000)	62.50000
2	0.15100	(L/1113)	50.00000	0.00110	(< L/10000)	62.50000
3	0.10916	(L/1374)	50.00000	0.00118	(< L/10000)	37.50000
4	0.24587	(L/683)	50.00000	0.00131	(< L/10000)	37.50000
37	0.06904	(L/1386)	62.50000	0.00113	(< L/10000)	75.00000
38	0.07606	(L/1258)	62.50000	0.00118	(< L/10000)	37.50000
49	0.00078	(< L/10000)	50.00000	0.00000	(< L/10000)	75.00000
50	0.00220	(< L/10000)	50.00000	0.00000	(< L/10000)	75.00000
51	0.00078	(< L/10000)	50.00000	0.00000	(< L/10000)	75.00000
52	0.00220	(< L/10000)	50.00000	0.00000	(< L/10000)	62.50000
54	0.00078	(< L/10000)	50.00000	0.00000	(< L/10000)	75.00000
104	0.00000	(< L/10000)	75.00000	0.00000	(< L/10000)	62.50000
105	0.00000	(< L/10000)	62.50000	0.00000	(< L/10000)	62.50000
110	0.02105	(L/3566)	50.00000	0.00027	(< L/10000)	37.50000
111	0.03630	(L/2068)	50.00000	0.00035	(< L/10000)	37.50000
112	0.01688	(L/4448)	50.00000	0.00032	(< L/10000)	62.50000
113	0.02020	(L/3717)	50.00000	0.00033	(< L/10000)	62.50000

CONDITION C15=1.2D+I+W130

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)		
30	0.00191	(< L/10000)	50.00000	0.00110	(< L/10000)	50.00000
33	0.00264	(< L/10000)	75.00000	0.00171	(< L/10000)	75.00000
36	0.04493	(L/2129)	62.50000	0.00207	(< L/10000)	75.00000
1	0.15409	(L/973)	50.00000	0.00201	(< L/10000)	62.50000
2	0.15036	(L/1117)	50.00000	0.00195	(< L/10000)	75.00000
3	0.11001	(L/1363)	50.00000	0.00119	(< L/10000)	37.50000
4	0.24475	(L/686)	50.00000	0.00128	(< L/10000)	37.50000
37	0.07020	(L/1363)	62.50000	0.00181	(< L/10000)	75.00000
38	0.07398	(L/1293)	62.50000	0.00153	(< L/10000)	87.50000
49	0.00068	(< L/10000)	50.00000	0.00039	(< L/10000)	50.00000
50	0.00191	(< L/10000)	50.00000	0.00110	(< L/10000)	50.00000
51	0.00068	(< L/10000)	50.00000	0.00039	(< L/10000)	50.00000
52	0.00191	(< L/10000)	50.00000	0.00110	(< L/10000)	50.00000
54	0.00068	(< L/10000)	50.00000	0.00039	(< L/10000)	50.00000
104	0.00000	(< L/10000)	25.00000	0.00000	(< L/10000)	62.50000
105	0.00000	(< L/10000)	75.00000	0.00000	(< L/10000)	75.00000
110	0.02132	(L/3521)	50.00000	0.00045	(< L/10000)	37.50000
111	0.03580	(L/2097)	50.00000	0.00031	(< L/10000)	37.50000
112	0.01625	(L/4619)	50.00000	0.00047	(< L/10000)	75.00000
113	0.02086	(L/3599)	50.00000	0.00037	(< L/10000)	75.00000

CONDITION C16=1.2D+I+W160

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)		
30	0.00110	(< L/10000)	50.00000	0.00191	(< L/10000)	50.00000
33	0.00365	(< L/10000)	75.00000	0.00220	(< L/10000)	75.00000
36	0.04501	(L/2125)	62.50000	0.00252	(< L/10000)	75.00000
1	0.15227	(L/985)	50.00000	0.00239	(< L/10000)	75.00000
2	0.15113	(L/1112)	50.00000	0.00233	(< L/10000)	75.00000
3	0.10945	(L/1370)	50.00000	0.00143	(< L/10000)	75.00000
4	0.24286	(L/692)	50.00000	0.00091	(< L/10000)	37.50000
37	0.07022	(L/1362)	62.50000	0.00202	(< L/10000)	75.00000
38	0.07158	(L/1337)	62.50000	0.00194	(< L/10000)	87.50000
49	0.00039	(< L/10000)	50.00000	0.00068	(< L/10000)	50.00000
50	0.00110	(< L/10000)	50.00000	0.00191	(< L/10000)	50.00000
51	0.00039	(< L/10000)	50.00000	0.00068	(< L/10000)	50.00000
52	0.00110	(< L/10000)	50.00000	0.00191	(< L/10000)	50.00000
54	0.00039	(< L/10000)	50.00000	0.00068	(< L/10000)	50.00000
104	0.00000	(< L/10000)	25.00000	0.00000	(< L/10000)	37.50000
105	0.00000	(< L/10000)	25.00000	0.00000	(< L/10000)	75.00000
110	0.02131	(L/3522)	50.00000	0.00050	(< L/10000)	37.50000
111	0.03518	(L/2134)	50.00000	0.00042	(< L/10000)	75.00000
112	0.01585	(L/4736)	50.00000	0.00052	(< L/10000)	75.00000
113	0.02154	(L/3485)	50.00000	0.00038	(< L/10000)	25.00000

CONDITION C17=1.2D+I+WI90

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00000 (< L/10000)	62.50000	0.00220 (< L/10000)	50.00000
33	0.00452 (< L/10000)	75.00000	0.00209 (< L/10000)	75.00000
36	0.04601 (L/2080)	62.50000	0.00229 (< L/10000)	75.00000
1	0.15086 (L/994)	50.00000	0.00220 (< L/10000)	75.00000
2	0.15306 (L/1098)	50.00000	0.00209 (< L/10000)	75.00000
3	0.10764 (L/1394)	50.00000	0.00149 (< L/10000)	75.00000
4	0.24074 (L/698)	50.00000	0.00102 (< L/10000)	62.50000
37	0.06910 (L/1385)	62.50000	0.00175 (< L/10000)	87.50000
38	0.06956 (L/1375)	62.50000	0.00189 (< L/10000)	75.00000
49	0.00000 (< L/10000)	62.50000	0.00078 (< L/10000)	50.00000
50	0.00000 (< L/10000)	25.00000	0.00220 (< L/10000)	50.00000
51	0.00000 (< L/10000)	12.50000	0.00078 (< L/10000)	50.00000
52	0.00000 (< L/10000)	62.50000	0.00220 (< L/10000)	50.00000
54	0.00000 (< L/10000)	62.50000	0.00078 (< L/10000)	50.00000
104	0.00000 (< L/10000)	25.00000	0.00000 (< L/10000)	62.50000
105	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	75.00000
110	0.02103 (L/3570)	50.00000	0.00043 (< L/10000)	37.50000
111	0.03462 (L/2168)	50.00000	0.00048 (< L/10000)	75.00000
112	0.01579 (L/4754)	50.00000	0.00043 (< L/10000)	75.00000
113	0.02203 (L/3408)	50.00000	0.00045 (< L/10000)	25.00000

CONDITION C18=1.2D+I+WI120

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00110 (< L/10000)	50.00000	0.00191 (< L/10000)	50.00000
33	0.00505 (< L/10000)	75.00000	0.00143 (< L/10000)	75.00000
36	0.04764 (L/2008)	62.50000	0.00144 (< L/10000)	75.00000
1	0.15019 (L/999)	50.00000	0.00142 (< L/10000)	75.00000
2	0.15566 (L/1079)	50.00000	0.00129 (< L/10000)	75.00000
3	0.10505 (L/1428)	50.00000	0.00125 (< L/10000)	62.50000
4	0.23894 (L/703)	50.00000	0.00127 (< L/10000)	62.50000
37	0.06713 (L/1425)	62.50000	0.00121 (< L/10000)	37.50000
38	0.06842 (L/1398)	62.50000	0.00139 (< L/10000)	75.00000
49	0.00039 (< L/10000)	50.00000	0.00068 (< L/10000)	50.00000
50	0.00110 (< L/10000)	50.00000	0.00191 (< L/10000)	50.00000
51	0.00039 (< L/10000)	50.00000	0.00068 (< L/10000)	50.00000
52	0.00110 (< L/10000)	50.00000	0.00191 (< L/10000)	50.00000
54	0.00039 (< L/10000)	50.00000	0.00068 (< L/10000)	50.00000
104	0.00000 (< L/10000)	25.00000	0.00000 (< L/10000)	50.00000
105	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	62.50000
110	0.02054 (L/3655)	50.00000	0.00023 (< L/10000)	37.50000
111	0.03426 (L/2191)	50.00000	0.00044 (< L/10000)	62.50000
112	0.01608 (L/4670)	50.00000	0.00028 (< L/10000)	25.00000
113	0.02221 (L/3379)	50.00000	0.00040 (< L/10000)	37.50000

CONDITION C19=1.2D+I+WI150

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00191 (< L/10000)	50.00000	0.00110 (< L/10000)	50.00000
33	0.00510 (< L/10000)	75.00000	0.00038 (< L/10000)	62.50000
36	0.04951 (L/1932)	62.50000	0.00020 (< L/10000)	75.00000
1	0.15044 (L/997)	50.00000	0.00095 (< L/10000)	37.50000
2	0.15827 (L/1062)	50.00000	0.00064 (< L/10000)	25.00000
3	0.10234 (L/1466)	50.00000	0.00086 (< L/10000)	37.50000
4	0.23792 (L/706)	50.00000	0.00119 (< L/10000)	62.50000
37	0.06481 (L/1476)	62.50000	0.00092 (< L/10000)	37.50000
38	0.06847 (L/1397)	62.50000	0.00076 (< L/10000)	50.00000
49	0.00068 (< L/10000)	50.00000	0.00039 (< L/10000)	50.00000
50	0.00191 (< L/10000)	50.00000	0.00110 (< L/10000)	50.00000
51	0.00068 (< L/10000)	50.00000	0.00039 (< L/10000)	50.00000
52	0.00191 (< L/10000)	50.00000	0.00110 (< L/10000)	50.00000
54	0.00068 (< L/10000)	50.00000	0.00039 (< L/10000)	50.00000
104	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	62.50000
105	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	75.00000

110	0.01997	(L/3759)	50.00000	0.00015	(< L/10000)	62.50000
111	0.03420	(L/2195)	50.00000	0.00033	(< L/10000)	50.00000
112	0.01665	(L/4510)	50.00000	0.00017	(< L/10000)	25.00000
113	0.02204	(L/3407)	50.00000	0.00030	(< L/10000)	50.00000

CONDITION C20=1.2D+I-WI0

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00220 (< L/10000)	50.00000	0.00000 (< L/10000)	62.50000
33	0.00464 (< L/10000)	75.00000	0.00077 (< L/10000)	75.00000
36	0.05106 (L/1874)	62.50000	0.00108 (< L/10000)	75.00000
1	0.15155 (L/990)	50.00000	0.00122 (< L/10000)	62.50000
2	0.16012 (L/1049)	50.00000	0.00110 (< L/10000)	62.50000
3	0.10031 (L/1495)	50.00000	0.00118 (< L/10000)	37.50000
4	0.23799 (L/706)	50.00000	0.00131 (< L/10000)	37.50000
37	0.06282 (L/1523)	62.50000	0.00113 (< L/10000)	75.00000
38	0.06969 (L/1373)	62.50000	0.00118 (< L/10000)	37.50000
49	0.00078 (< L/10000)	50.00000	0.00000 (< L/10000)	75.00000
50	0.00220 (< L/10000)	50.00000	0.00000 (< L/10000)	62.50000
51	0.00078 (< L/10000)	50.00000	0.00000 (< L/10000)	62.50000
52	0.00220 (< L/10000)	50.00000	0.00000 (< L/10000)	75.00000
54	0.00078 (< L/10000)	50.00000	0.00000 (< L/10000)	75.00000
104	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	75.00000
105	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	25.00000
110	0.01949 (L/3851)	50.00000	0.00027 (< L/10000)	37.50000
111	0.03445 (L/2179)	50.00000	0.00035 (< L/10000)	37.50000
112	0.01733 (L/4332)	50.00000	0.00032 (< L/10000)	62.50000
113	0.02155 (L/3483)	50.00000	0.00033 (< L/10000)	62.50000

CONDITION C21=1.2D+I-WI30

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00191 (< L/10000)	50.00000	0.00110 (< L/10000)	50.00000
33	0.00382 (< L/10000)	75.00000	0.00171 (< L/10000)	75.00000
36	0.05191 (L/1843)	62.50000	0.00207 (< L/10000)	75.00000
1	0.15321 (L/979)	50.00000	0.00201 (< L/10000)	62.50000
2	0.16077 (L/1045)	50.00000	0.00195 (< L/10000)	75.00000
3	0.09946 (L/1508)	50.00000	0.00119 (< L/10000)	37.50000
4	0.23911 (L/703)	50.00000	0.00128 (< L/10000)	37.50000
37	0.06165 (L/1552)	62.50000	0.00181 (< L/10000)	75.00000
38	0.07176 (L/1333)	62.50000	0.00153 (< L/10000)	87.50000
49	0.00068 (< L/10000)	50.00000	0.00039 (< L/10000)	50.00000
50	0.00191 (< L/10000)	50.00000	0.00110 (< L/10000)	50.00000
51	0.00068 (< L/10000)	50.00000	0.00039 (< L/10000)	50.00000
52	0.00191 (< L/10000)	50.00000	0.00110 (< L/10000)	50.00000
54	0.00068 (< L/10000)	50.00000	0.00039 (< L/10000)	50.00000
104	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	62.50000
105	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	25.00000
110	0.01922 (L/3906)	50.00000	0.00045 (< L/10000)	37.50000
111	0.03495 (L/2148)	50.00000	0.00031 (< L/10000)	37.50000
112	0.01795 (L/4182)	50.00000	0.00047 (< L/10000)	75.00000
113	0.02089 (L/3594)	50.00000	0.00037 (< L/10000)	75.00000

CONDITION C22=1.2D+I-WI60

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00110 (< L/10000)	50.00000	0.00191 (< L/10000)	50.00000
33	0.00281 (< L/10000)	75.00000	0.00220 (< L/10000)	75.00000
36	0.05183 (L/1846)	62.50000	0.00252 (< L/10000)	75.00000
1	0.15503 (L/968)	50.00000	0.00239 (< L/10000)	75.00000
2	0.16000 (L/1050)	50.00000	0.00233 (< L/10000)	75.00000
3	0.10002 (L/1500)	50.00000	0.00143 (< L/10000)	75.00000
4	0.24100 (L/697)	50.00000	0.00091 (< L/10000)	37.50000
37	0.06163 (L/1552)	62.50000	0.00202 (< L/10000)	75.00000
38	0.07417 (L/1290)	62.50000	0.00194 (< L/10000)	87.50000
49	0.00039 (< L/10000)	50.00000	0.00068 (< L/10000)	50.00000

50	0.00110	(< L/10000)	50.00000	0.00191	(< L/10000)	50.00000
51	0.00039	(< L/10000)	50.00000	0.00068	(< L/10000)	50.00000
52	0.00110	(< L/10000)	50.00000	0.00191	(< L/10000)	50.00000
54	0.00039	(< L/10000)	50.00000	0.00068	(< L/10000)	50.00000
104	0.00000	(< L/10000)	75.00000	0.00000	(< L/10000)	75.00000
105	0.00000	(< L/10000)	62.50000	0.00000	(< L/10000)	75.00000
110	0.01923	(L/3904)	50.00000	0.00050	(< L/10000)	37.50000
111	0.03557	(L/2111)	50.00000	0.00042	(< L/10000)	75.00000
112	0.01835	(L/4091)	50.00000	0.00052	(< L/10000)	75.00000
113	0.02021	(L/3714)	50.00000	0.00038	(< L/10000)	25.00000

CONDITION C23=1.2D+I-WI90

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00000 (< L/10000)	62.50000	0.00220 (< L/10000)	50.00000
33	0.00200 (< L/10000)	87.50000	0.00209 (< L/10000)	75.00000
36	0.05084 (L/1882)	62.50000	0.00229 (< L/10000)	75.00000
1	0.15644 (L/959)	50.00000	0.00220 (< L/10000)	75.00000
2	0.15806 (L/1063)	50.00000	0.00209 (< L/10000)	75.00000
3	0.10184 (L/1473)	50.00000	0.00149 (< L/10000)	75.00000
4	0.24312 (L/691)	50.00000	0.00102 (< L/10000)	62.50000
37	0.06275 (L/1525)	62.50000	0.00175 (< L/10000)	87.50000
38	0.07619 (L/1256)	62.50000	0.00189 (< L/10000)	75.00000
49	0.00000 (< L/10000)	62.50000	0.00078 (< L/10000)	50.00000
50	0.00000 (< L/10000)	62.50000	0.00220 (< L/10000)	50.00000
51	0.00000 (< L/10000)	12.50000	0.00078 (< L/10000)	50.00000
52	0.00000 (< L/10000)	25.00000	0.00220 (< L/10000)	50.00000
54	0.00000 (< L/10000)	62.50000	0.00078 (< L/10000)	50.00000
104	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	62.50000
105	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	62.50000
110	0.01952 (L/3847)	50.00000	0.00043 (< L/10000)	37.50000
111	0.03613 (L/2078)	50.00000	0.00048 (< L/10000)	75.00000
112	0.01842 (L/4077)	50.00000	0.00043 (< L/10000)	75.00000
113	0.01972 (L/3807)	50.00000	0.00045 (< L/10000)	25.00000

CONDITION C24=1.2D+I-WI120

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00110 (< L/10000)	50.00000	0.00191 (< L/10000)	50.00000
33	0.00164 (< L/10000)	87.50000	0.00143 (< L/10000)	75.00000
36	0.04920 (L/1944)	62.50000	0.00144 (< L/10000)	75.00000
1	0.15711 (L/955)	50.00000	0.00142 (< L/10000)	75.00000
2	0.15547 (L/1081)	50.00000	0.00129 (< L/10000)	75.00000
3	0.10442 (L/1436)	50.00000	0.00125 (< L/10000)	62.50000
4	0.24492 (L/686)	50.00000	0.00127 (< L/10000)	62.50000
37	0.06472 (L/1478)	62.50000	0.00121 (< L/10000)	37.50000
38	0.07733 (L/1237)	62.50000	0.00139 (< L/10000)	75.00000
49	0.00039 (< L/10000)	50.00000	0.00068 (< L/10000)	50.00000
50	0.00110 (< L/10000)	50.00000	0.00191 (< L/10000)	50.00000
51	0.00039 (< L/10000)	50.00000	0.00068 (< L/10000)	50.00000
52	0.00110 (< L/10000)	50.00000	0.00191 (< L/10000)	50.00000
54	0.00039 (< L/10000)	50.00000	0.00068 (< L/10000)	50.00000
104	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	62.50000
105	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	62.50000
110	0.02000 (L/3753)	50.00000	0.00023 (< L/10000)	37.50000
111	0.03649 (L/2057)	50.00000	0.00044 (< L/10000)	62.50000
112	0.01813 (L/4141)	50.00000	0.00028 (< L/10000)	25.00000
113	0.01954 (L/3842)	50.00000	0.00040 (< L/10000)	37.50000

CONDITION C25=1.2D+I-WI150

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00191 (< L/10000)	50.00000	0.00110 (< L/10000)	50.00000
33	0.00161 (< L/10000)	87.50000	0.00038 (< L/10000)	62.50000
36	0.04733 (L/2021)	62.50000	0.00020 (< L/10000)	75.00000
1	0.15686 (L/956)	50.00000	0.00095 (< L/10000)	37.50000

2	0.15286	(L/1099)	50.00000	0.00064	(< L/10000)	25.00000
3	0.10713	(L/1400)	50.00000	0.00086	(< L/10000)	37.50000
4	0.24594	(L/683)	50.00000	0.00119	(< L/10000)	62.50000
37	0.06705	(L/1427)	62.50000	0.00092	(< L/10000)	37.50000
38	0.07728	(L/1238)	62.50000	0.00076	(< L/10000)	50.00000
49	0.00068	(< L/10000)	50.00000	0.00039	(< L/10000)	50.00000
50	0.00191	(< L/10000)	50.00000	0.00110	(< L/10000)	50.00000
51	0.00068	(< L/10000)	50.00000	0.00039	(< L/10000)	50.00000
52	0.00191	(< L/10000)	50.00000	0.00110	(< L/10000)	50.00000
54	0.00068	(< L/10000)	50.00000	0.00039	(< L/10000)	50.00000
104	0.00000	(< L/10000)	62.50000	0.00000	(< L/10000)	62.50000
105	0.00000	(< L/10000)	62.50000	0.00000	(< L/10000)	62.50000
110	0.02057	(L/3649)	50.00000	0.00015	(< L/10000)	62.50000
111	0.03655	(L/2054)	50.00000	0.00033	(< L/10000)	50.00000
112	0.01756	(L/4276)	50.00000	0.00017	(< L/10000)	25.00000
113	0.01972	(L/3808)	50.00000	0.00030	(< L/10000)	50.00000

CONDITION C26=1.2D+1.5LM+LV

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	62.50000
33	0.00508 (< L/10000)	37.50000	0.00000 (< L/10000)	75.00000
36	0.09757 (L/981)	62.50000	0.00000 (< L/10000)	37.50000
1	0.17121 (L/876)	50.00000	0.00000 (< L/10000)	62.50000
2	0.13631 (L/1232)	50.00000	0.00000 (< L/10000)	50.00000
3	0.07175 (L/2091)	50.00000	0.00000 (< L/10000)	50.00000
4	0.09256 (L/1815)	50.00000	0.00000 (< L/10000)	12.50000
37	0.01551 (L/6169)	62.50000	0.00000 (< L/10000)	37.50000
38	0.02259 (L/4235)	75.00000	0.00000 (< L/10000)	75.00000
49	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	62.50000
50	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	62.50000
51	0.00000 (< L/10000)	25.00000	0.00000 (< L/10000)	62.50000
52	0.00000 (< L/10000)	50.00000	0.00000 (< L/10000)	75.00000
54	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	75.00000
104	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	12.50000
105	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	37.50000
110	0.00218 (< L/10000)	37.50000	0.00000 (< L/10000)	37.50000
111	0.02976 (L/2522)	50.00000	0.00000 (< L/10000)	50.00000
112	0.01841 (L/4078)	50.00000	0.00000 (< L/10000)	50.00000
113	0.03080 (L/2437)	50.00000	0.00000 (< L/10000)	50.00000

CONDITION C27=1.2D+1.5LM+WM0

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00070 (< L/10000)	50.00000	0.00000 (< L/10000)	62.50000
33	0.00601 (< L/10000)	37.50000	0.00026 (< L/10000)	75.00000
36	0.09283 (L/1031)	62.50000	0.00035 (< L/10000)	75.00000
1	0.15386 (L/975)	50.00000	0.00039 (< L/10000)	62.50000
2	0.15098 (L/1113)	50.00000	0.00035 (< L/10000)	62.50000
3	0.05518 (L/2719)	50.00000	0.00037 (< L/10000)	37.50000
4	0.10270 (L/1636)	50.00000	0.00041 (< L/10000)	37.50000
37	0.01897 (L/5042)	62.50000	0.00037 (< L/10000)	75.00000
38	0.02588 (L/3697)	75.00000	0.00037 (< L/10000)	37.50000
49	0.00023 (< L/10000)	50.00000	0.00000 (< L/10000)	75.00000
50	0.00070 (< L/10000)	50.00000	0.00000 (< L/10000)	62.50000
51	0.00023 (< L/10000)	50.00000	0.00000 (< L/10000)	75.00000
52	0.00070 (< L/10000)	50.00000	0.00000 (< L/10000)	62.50000
54	0.00023 (< L/10000)	50.00000	0.00000 (< L/10000)	62.50000
104	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	75.00000
105	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	25.00000
110	0.00158 (< L/10000)	37.50000	0.00009 (< L/10000)	37.50000
111	0.03061 (L/2453)	50.00000	0.00011 (< L/10000)	37.50000
112	0.01218 (L/6165)	50.00000	0.00010 (< L/10000)	62.50000
113	0.02442 (L/3074)	50.00000	0.00010 (< L/10000)	62.50000

CONDITION C28=1.2D+1.5LM+WM30

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00061 (< L/10000)	50.00000	0.00034 (< L/10000)	50.00000
33	0.00583 (< L/10000)	37.50000	0.00054 (< L/10000)	75.00000
36	0.09256 (L/1034)	62.50000	0.00066 (< L/10000)	75.00000
1	0.15335 (L/978)	50.00000	0.00063 (< L/10000)	62.50000
2	0.15077 (L/1114)	50.00000	0.00062 (< L/10000)	75.00000
3	0.05544 (L/2706)	50.00000	0.00037 (< L/10000)	37.50000
4	0.10234 (L/1642)	50.00000	0.00040 (< L/10000)	37.50000
37	0.01933 (L/4949)	62.50000	0.00058 (< L/10000)	75.00000
38	0.02532 (L/3779)	75.00000	0.00049 (< L/10000)	87.50000
49	0.00020 (< L/10000)	50.00000	0.00011 (< L/10000)	50.00000
50	0.00061 (< L/10000)	50.00000	0.00034 (< L/10000)	50.00000
51	0.00020 (< L/10000)	50.00000	0.00011 (< L/10000)	50.00000
52	0.00061 (< L/10000)	50.00000	0.00034 (< L/10000)	50.00000
54	0.00020 (< L/10000)	50.00000	0.00011 (< L/10000)	50.00000
104	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	75.00000
105	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	62.50000
110	0.00149 (< L/10000)	37.50000	0.00014 (< L/10000)	37.50000
111	0.03046 (L/2465)	50.00000	0.00010 (< L/10000)	37.50000
112	0.01198 (L/6265)	50.00000	0.00015 (< L/10000)	75.00000
113	0.02462 (L/3049)	50.00000	0.00012 (< L/10000)	75.00000

CONDITION C29=1.2D+1.5LM+WM60

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00034 (< L/10000)	50.00000	0.00061 (< L/10000)	50.00000
33	0.00562 (< L/10000)	37.50000	0.00069 (< L/10000)	75.00000
36	0.09259 (L/1033)	62.50000	0.00079 (< L/10000)	75.00000
1	0.15280 (L/982)	50.00000	0.00075 (< L/10000)	75.00000
2	0.15098 (L/1113)	50.00000	0.00073 (< L/10000)	75.00000
3	0.05525 (L/2715)	50.00000	0.00044 (< L/10000)	75.00000
4	0.10174 (L/1651)	50.00000	0.00028 (< L/10000)	37.50000
37	0.01934 (L/4947)	62.50000	0.00063 (< L/10000)	75.00000
38	0.02466 (L/3880)	75.00000	0.00061 (< L/10000)	87.50000
49	0.00011 (< L/10000)	50.00000	0.00020 (< L/10000)	50.00000
50	0.00034 (< L/10000)	50.00000	0.00061 (< L/10000)	50.00000
51	0.00011 (< L/10000)	50.00000	0.00020 (< L/10000)	50.00000
52	0.00034 (< L/10000)	50.00000	0.00061 (< L/10000)	50.00000
54	0.00011 (< L/10000)	50.00000	0.00020 (< L/10000)	50.00000
104	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	75.00000
105	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	62.50000
110	0.00149 (< L/10000)	37.50000	0.00016 (< L/10000)	37.50000
111	0.03026 (L/2481)	50.00000	0.00013 (< L/10000)	75.00000
112	0.01185 (L/6333)	50.00000	0.00016 (< L/10000)	75.00000
113	0.02484 (L/3023)	50.00000	0.00012 (< L/10000)	25.00000

CONDITION C30=1.2D+1.5LM+WM90

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00000 (< L/10000)	62.50000	0.00070 (< L/10000)	50.00000
33	0.00543 (< L/10000)	37.50000	0.00065 (< L/10000)	75.00000
36	0.09290 (L/1030)	62.50000	0.00071 (< L/10000)	75.00000
1	0.15237 (L/984)	50.00000	0.00069 (< L/10000)	75.00000
2	0.15157 (L/1108)	50.00000	0.00066 (< L/10000)	75.00000
3	0.05468 (L/2743)	50.00000	0.00046 (< L/10000)	75.00000
4	0.10108 (L/1662)	50.00000	0.00032 (< L/10000)	62.50000
37	0.01899 (L/5037)	62.50000	0.00054 (< L/10000)	87.50000
38	0.02411 (L/3968)	75.00000	0.00059 (< L/10000)	75.00000
49	0.00000 (< L/10000)	62.50000	0.00023 (< L/10000)	50.00000
50	0.00000 (< L/10000)	75.00000	0.00070 (< L/10000)	50.00000
51	0.00000 (< L/10000)	25.00000	0.00023 (< L/10000)	50.00000
52	0.00000 (< L/10000)	50.00000	0.00070 (< L/10000)	50.00000
54	0.00000 (< L/10000)	75.00000	0.00023 (< L/10000)	50.00000
104	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	75.00000
105	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	25.00000
110	0.00156 (< L/10000)	37.50000	0.00013 (< L/10000)	37.50000
111	0.03009 (L/2495)	50.00000	0.00015 (< L/10000)	75.00000

112	0.01183	(L/6345)	50.00000	0.00013	(< L/10000)	75.00000
113	0.02499	(L/3004)	50.00000	0.00014	(< L/10000)	25.00000

CONDITION C31=1.2D+1.5LM+WM120

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00034	(< L/10000)	0.00061	(< L/10000)
33	0.00532	(< L/10000)	0.00044	(< L/10000)
36	0.09341	(L/1024)	0.00044	(< L/10000)
1	0.15217	(L/986)	0.00044	(< L/10000)
2	0.15239	(L/1102)	0.00040	(< L/10000)
3	0.05387	(L/2785)	0.00038	(< L/10000)
4	0.10053	(L/1671)	0.00040	(< L/10000)
37	0.01838	(L/5205)	0.00038	(< L/10000)
38	0.02380	(L/4019)	0.00043	(< L/10000)
49	0.00011	(< L/10000)	0.00020	(< L/10000)
50	0.00034	(< L/10000)	0.00061	(< L/10000)
51	0.00011	(< L/10000)	0.00020	(< L/10000)
52	0.00034	(< L/10000)	0.00061	(< L/10000)
54	0.00011	(< L/10000)	0.00020	(< L/10000)
104	0.00000	(< L/10000)	0.00000	(< L/10000)
105	0.00000	(< L/10000)	0.00000	(< L/10000)
110	0.00170	(< L/10000)	0.00007	(< L/10000)
111	0.02998	(L/2504)	0.00014	(< L/10000)
112	0.01192	(L/6298)	0.00009	(< L/10000)
113	0.02505	(L/2997)	0.00012	(< L/10000)

CONDITION C32=1.2D+1.5LM-LV

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00000	(< L/10000)	0.00000	(< L/10000)
33	0.00729	(< L/10000)	0.00000	(< L/10000)
36	0.08975	(L/1066)	0.00000	(< L/10000)
1	0.13526	(L/1109)	0.00000	(< L/10000)
2	0.16849	(L/997)	0.00000	(< L/10000)
3	0.03580	(L/4189)	0.00000	(< L/10000)
4	0.11039	(L/1522)	0.00000	(< L/10000)
37	0.02050	(L/4666)	0.00000	(< L/10000)
38	0.02743	(L/3488)	0.00000	(< L/10000)
49	0.00000	(< L/10000)	0.00000	(< L/10000)
50	0.00000	(< L/10000)	0.00000	(< L/10000)
51	0.00000	(< L/10000)	0.00000	(< L/10000)
52	0.00000	(< L/10000)	0.00000	(< L/10000)
54	0.00000	(< L/10000)	0.00000	(< L/10000)
104	0.00000	(< L/10000)	0.00000	(< L/10000)
105	0.00000	(< L/10000)	0.00000	(< L/10000)
110	0.00144	(< L/10000)	0.00000	(< L/10000)
111	0.03088	(L/2431)	0.00000	(< L/10000)
112	0.00608	(< L/10000)	0.00000	(< L/10000)
113	0.01847	(L/4065)	0.00000	(< L/10000)

CONDITION C33=1.2D+1.5LM-WM0

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00070	(< L/10000)	0.00000	(< L/10000)
33	0.00540	(< L/10000)	0.00026	(< L/10000)
36	0.09449	(L/1012)	0.00035	(< L/10000)
1	0.15260	(L/983)	0.00039	(< L/10000)
2	0.15382	(L/1092)	0.00035	(< L/10000)
3	0.05238	(L/2864)	0.00037	(< L/10000)
4	0.10025	(L/1676)	0.00041	(< L/10000)
37	0.01704	(L/5615)	0.00037	(< L/10000)
38	0.02414	(L/3963)	0.00037	(< L/10000)
49	0.00023	(< L/10000)	0.00000	(< L/10000)
50	0.00070	(< L/10000)	0.00000	(< L/10000)
51	0.00023	(< L/10000)	0.00000	(< L/10000)

52	0.00070	(< L/10000)	50.00000	0.00000	(< L/10000)	75.00000
54	0.00023	(< L/10000)	50.00000	0.00000	(< L/10000)	75.00000
104	0.00000	(< L/10000)	75.00000	0.00000	(< L/10000)	75.00000
105	0.00000	(< L/10000)	62.50000	0.00000	(< L/10000)	62.50000
110	0.00199	(< L/10000)	37.50000	0.00009	(< L/10000)	37.50000
111	0.03003	(L/2500)	50.00000	0.00011	(< L/10000)	37.50000
112	0.01231	(L/6099)	50.00000	0.00010	(< L/10000)	62.50000
113	0.02485	(L/3021)	50.00000	0.00010	(< L/10000)	62.50000

CONDITION C34=1.2D+1.5LM-WM30

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00061 (< L/10000)	50.00000	0.00034 (< L/10000)	50.00000
33	0.00558 (< L/10000)	37.50000	0.00054 (< L/10000)	75.00000
36	0.09476 (L/1010)	62.50000	0.00066 (< L/10000)	75.00000
1	0.15311 (L/980)	50.00000	0.00063 (< L/10000)	62.50000
2	0.15403 (L/1091)	50.00000	0.00062 (< L/10000)	75.00000
3	0.05212 (L/2878)	50.00000	0.00037 (< L/10000)	37.50000
4	0.10061 (L/1670)	50.00000	0.00040 (< L/10000)	37.50000
37	0.01668 (L/5735)	62.50000	0.00058 (< L/10000)	75.00000
38	0.02470 (L/3873)	75.00000	0.00049 (< L/10000)	87.50000
49	0.00020 (< L/10000)	50.00000	0.00011 (< L/10000)	50.00000
50	0.00061 (< L/10000)	50.00000	0.00034 (< L/10000)	50.00000
51	0.00020 (< L/10000)	50.00000	0.00011 (< L/10000)	50.00000
52	0.00061 (< L/10000)	50.00000	0.00034 (< L/10000)	50.00000
54	0.00020 (< L/10000)	50.00000	0.00011 (< L/10000)	50.00000
104	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	62.50000
105	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	62.50000
110	0.00207 (< L/10000)	37.50000	0.00014 (< L/10000)	37.50000
111	0.03019 (L/2487)	50.00000	0.00010 (< L/10000)	37.50000
112	0.01250 (L/6005)	50.00000	0.00015 (< L/10000)	75.00000
113	0.02464 (L/3046)	50.00000	0.00012 (< L/10000)	75.00000

CONDITION C35=1.2D+1.5LM-WM60

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00034 (< L/10000)	50.00000	0.00061 (< L/10000)	50.00000
33	0.00579 (< L/10000)	37.50000	0.00069 (< L/10000)	75.00000
36	0.09473 (L/1010)	62.50000	0.00079 (< L/10000)	75.00000
1	0.15367 (L/976)	50.00000	0.00075 (< L/10000)	75.00000
2	0.15382 (L/1092)	50.00000	0.00073 (< L/10000)	75.00000
3	0.05231 (L/2868)	50.00000	0.00044 (< L/10000)	75.00000
4	0.10121 (L/1660)	50.00000	0.00028 (< L/10000)	37.50000
37	0.01667 (L/5737)	62.50000	0.00063 (< L/10000)	75.00000
38	0.02536 (L/3773)	75.00000	0.00061 (< L/10000)	87.50000
49	0.00011 (< L/10000)	50.00000	0.00020 (< L/10000)	50.00000
50	0.00034 (< L/10000)	50.00000	0.00061 (< L/10000)	50.00000
51	0.00011 (< L/10000)	50.00000	0.00020 (< L/10000)	50.00000
52	0.00034 (< L/10000)	50.00000	0.00061 (< L/10000)	50.00000
54	0.00011 (< L/10000)	50.00000	0.00020 (< L/10000)	50.00000
104	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	62.50000
105	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	25.00000
110	0.00208 (< L/10000)	37.50000	0.00016 (< L/10000)	37.50000
111	0.03038 (L/2471)	50.00000	0.00013 (< L/10000)	75.00000
112	0.01263 (L/5944)	50.00000	0.00016 (< L/10000)	75.00000
113	0.02443 (L/3073)	50.00000	0.00012 (< L/10000)	25.00000

CONDITION C36=1.2D+1.5LM-WM90

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00000 (< L/10000)	62.50000	0.00070 (< L/10000)	50.00000
33	0.00597 (< L/10000)	37.50000	0.00065 (< L/10000)	75.00000
36	0.09442 (L/1013)	62.50000	0.00071 (< L/10000)	75.00000
1	0.15410 (L/973)	50.00000	0.00069 (< L/10000)	75.00000
2	0.15323 (L/1096)	50.00000	0.00066 (< L/10000)	75.00000
3	0.05287 (L/2837)	50.00000	0.00046 (< L/10000)	75.00000

4	0.10187	(L/1649)	50.00000	0.00032	(< L/10000)	62.50000
37	0.01702	(L/5621)	62.50000	0.00054	(< L/10000)	87.50000
38	0.02591	(L/3693)	75.00000	0.00059	(< L/10000)	75.00000
49	0.00000	(< L/10000)	87.50000	0.00023	(< L/10000)	50.00000
50	0.00000	(< L/10000)	75.00000	0.00070	(< L/10000)	50.00000
51	0.00000	(< L/10000)	25.00000	0.00023	(< L/10000)	50.00000
52	0.00000	(< L/10000)	50.00000	0.00070	(< L/10000)	50.00000
54	0.00000	(< L/10000)	75.00000	0.00023	(< L/10000)	50.00000
104	0.00000	(< L/10000)	75.00000	0.00000	(< L/10000)	62.50000
105	0.00000	(< L/10000)	37.50000	0.00000	(< L/10000)	62.50000
110	0.00200	(< L/10000)	37.50000	0.00013	(< L/10000)	37.50000
111	0.03056	(L/2457)	50.00000	0.00015	(< L/10000)	75.00000
112	0.01265	(L/5933)	50.00000	0.00013	(< L/10000)	75.00000
113	0.02428	(L/3092)	50.00000	0.00014	(< L/10000)	25.00000

CONDITION C37=1.2D+1.5LM-WM120

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00034 (< L/10000)	50.00000	0.00061 (< L/10000)	50.00000
33	0.00609 (< L/10000)	37.50000	0.00044 (< L/10000)	75.00000
36	0.09391 (L/1019)	62.50000	0.00044 (< L/10000)	75.00000
1	0.15430 (L/972)	50.00000	0.00044 (< L/10000)	75.00000
2	0.15242 (L/1102)	50.00000	0.00040 (< L/10000)	75.00000
3	0.05369 (L/2794)	50.00000	0.00038 (< L/10000)	62.50000
4	0.10242 (L/1640)	50.00000	0.00040 (< L/10000)	62.50000
37	0.01763 (L/5426)	62.50000	0.00038 (< L/10000)	37.50000
38	0.02622 (L/3649)	75.00000	0.00043 (< L/10000)	75.00000
49	0.00011 (< L/10000)	50.00000	0.00020 (< L/10000)	50.00000
50	0.00034 (< L/10000)	50.00000	0.00061 (< L/10000)	50.00000
51	0.00011 (< L/10000)	50.00000	0.00020 (< L/10000)	50.00000
52	0.00034 (< L/10000)	50.00000	0.00061 (< L/10000)	50.00000
54	0.00011 (< L/10000)	50.00000	0.00020 (< L/10000)	50.00000
104	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	75.00000
105	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	75.00000
110	0.00187 (< L/10000)	37.50000	0.00007 (< L/10000)	37.50000
111	0.03067 (L/2448)	50.00000	0.00014 (< L/10000)	62.50000
112	0.01256 (L/5975)	50.00000	0.00009 (< L/10000)	25.00000
113	0.02422 (L/3100)	50.00000	0.00012 (< L/10000)	37.50000

CONDITION C38=1.2D+1.5LV

Member	Defl. (2) [in]	@(%)	Defl. (3) [in]	@(%)
30	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	12.50000
33	0.00780 (< L/10000)	75.00000	0.00000 (< L/10000)	87.50000
36	0.02626 (L/3643)	75.00000	0.00000 (< L/10000)	37.50000
1	0.08943 (L/1677)	50.00000	0.00000 (< L/10000)	25.00000
2	0.03770 (L/4456)	62.50000	0.00000 (< L/10000)	62.50000
3	0.06877 (L/2181)	50.00000	0.00000 (< L/10000)	50.00000
4	0.08143 (L/2063)	50.00000	0.00000 (< L/10000)	12.50000
37	0.02232 (L/4286)	62.50000	0.00000 (< L/10000)	37.50000
38	0.02533 (L/3777)	62.50000	0.00000 (< L/10000)	62.50000
49	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	75.00000
50	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	62.50000
51	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	62.50000
52	0.00000 (< L/10000)	12.50000	0.00000 (< L/10000)	75.00000
54	0.00000 (< L/10000)	75.00000	0.00000 (< L/10000)	62.50000
104	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	62.50000
105	0.00000 (< L/10000)	62.50000	0.00000 (< L/10000)	62.50000
110	0.00690 (< L/10000)	50.00000	0.00000 (< L/10000)	50.00000
111	0.01365 (L/5498)	50.00000	0.00000 (< L/10000)	50.00000
112	0.01593 (L/4713)	50.00000	0.00000 (< L/10000)	50.00000
113	0.01744 (L/4305)	50.00000	0.00000 (< L/10000)	50.00000

Envelope for principal stresses in members

Note.- **Ic** is the controlling load condition
 Principal stresses envelope for :

- C1=1.4D
- C2=1.2D+W0
- C3=1.2D+W30
- C4=1.2D+W60
- C5=1.2D+W90
- C6=1.2D+W120
- C7=1.2D+W150
- C8=1.2D-W0
- C9=1.2D-W30
- C10=1.2D-W60
- C11=1.2D-W90
- C12=1.2D-W120
- C13=1.2D-W150
- C14=1.2D+I+W10
- C15=1.2D+I+W130
- C16=1.2D+I+W160
- C17=1.2D+I+W190
- C18=1.2D+I+W120
- C19=1.2D+I+W1150
- C20=1.2D+I-W10
- C21=1.2D+I-W130
- C22=1.2D+I-W160
- C23=1.2D+I-W190
- C24=1.2D+I-W120
- C25=1.2D+I-W1150
- C26=1.2D+1.5LM+LV
- C27=1.2D+1.5LM+WM0
- C28=1.2D+1.5LM+WM30
- C29=1.2D+1.5LM+WM60
- C30=1.2D+1.5LM+WM90
- C31=1.2D+1.5LM+WM120
- C32=1.2D+1.5LM-LV
- C33=1.2D+1.5LM-WM0
- C34=1.2D+1.5LM-WM30
- C35=1.2D+1.5LM-WM60
- C36=1.2D+1.5LM-WM90
- C37=1.2D+1.5LM-WM120
- C38=1.2D+1.5LV

MEMBER 30

Station	Axial [Kip/in2]	Ic	Bending												
			Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic	
0%	Max	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
	Min	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
25%	Max	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
	Min	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
50%	Max	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
	Min	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
75%	Max	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
	Min	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
100%	Max	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
	Min	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1

MEMBER 33

Station	Axial [Kip/in2]	Ic	Bending												
			Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic	
0%	Max	0.56	C7	0.15	C4	0.31	C4	0.06	C5	0.19	C26	0.94	C4	0.94	C10
	Min	-0.56	C13	0.01	C32	0.00	C38	-0.19	C26	-0.06	C5	-0.94	C10	-0.94	C4
25%	Max	0.56	C7	0.15	C4	0.31	C4	0.06	C7	0.52	C26	0.53	C10	0.53	C4
	Min	-0.56	C13	0.01	C32	0.00	C38	-0.52	C26	-0.06	C7	-0.53	C4	-0.53	C10
50%	Max	0.58	C7	0.92	C26	0.73	C4	0.12	C7	0.82	C26	1.02	C10	1.02	C4
	Min	-0.58	C13	0.05	C11	0.11	C7	-0.82	C26	-0.12	C7	-1.02	C4	-1.02	C10
75%	Max	0.58	C7	0.92	C26	0.73	C4	1.34	C38	1.05	C13	2.44	C4	2.44	C10
	Min	-0.58	C13	0.05	C11	0.11	C7	-1.05	C13	-1.34	C38	-2.44	C10	-2.44	C4
100%	Max	0.58	C7	0.92	C26	0.73	C4	3.20	C26	1.69	C13	5.90	C4	5.90	C10

Min -0.58 C13 0.05 C11 0.11 C7 -1.69 C13 -3.20 C26 -5.90 C10 -5.90 C4

MEMBER 36

Station		Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending							
								2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic
0%	Max	0.65	C9	0.39	C24	0.51	C11	0.24	C11	1.14	C26	1.65	C5	1.65	C11
	Min	-0.65	C3	0.06	C4	0.05	C38	-1.14	C26	-0.24	C11	-1.65	C11	-1.65	C5
25%	Max	0.65	C9	0.39	C24	0.51	C11	1.31	C32	0.37	C3	0.39	C10	0.39	C4
	Min	-0.65	C3	0.06	C4	0.05	C38	-0.37	C3	-1.31	C32	-0.39	C4	-0.39	C10
50%	Max	0.66	C9	1.10	C26	0.81	C11	3.39	C32	0.20	C3	0.64	C10	0.64	C4
	Min	-0.66	C3	0.10	C5	0.04	C7	-0.20	C3	-3.39	C32	-0.64	C4	-0.64	C10
75%	Max	0.66	C9	1.10	C26	0.81	C11	9.88	C26	-0.32	C3	2.46	C4	2.46	C10
	Min	-0.66	C3	0.10	C5	0.04	C7	0.32	C3	-9.88	C26	-2.46	C10	-2.46	C4
100%	Max	0.66	C9	1.10	C26	0.81	C11	16.71	C26	-0.83	C3	5.55	C4	5.55	C10
	Min	-0.66	C3	0.10	C5	0.04	C7	0.83	C3	-16.71	C26	-5.55	C10	-5.55	C4

MEMBER 1

Station		Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending							
								2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic
0%	Max	0.44	C5	0.46	C35	0.43	C11	1.50	C2	0.71	C8	1.11	C8	1.11	C2
	Min	-0.44	C11	0.03	C2	0.06	C38	-0.71	C8	-1.50	C2	-1.11	C2	-1.11	C8
25%	Max	0.44	C5	0.50	C31	0.41	C30	3.60	C14	-0.20	C8	0.81	C5	0.81	C11
	Min	-0.44	C11	0.04	C2	0.06	C38	0.20	C8	-3.60	C14	-0.81	C11	-0.81	C5
50%	Max	0.33	C5	0.97	C26	0.96	C26	5.19	C26	-1.30	C6	0.20	C8	0.20	C2
	Min	-0.33	C11	0.03	C38	0.03	C38	1.30	C6	-5.19	C26	-0.20	C2	-0.20	C8
75%	Max	0.22	C5	0.48	C32	0.38	C5	3.31	C26	0.11	C2	0.73	C10	0.73	C4
	Min	-0.22	C11	0.06	C7	0.01	C1	-0.11	C2	-3.31	C26	-0.73	C4	-0.73	C10
100%	Max	0.45	C3	1.02	C5	1.70	C11	0.73	C14	0.21	C8	2.56	C5	2.56	C11
	Min	-0.45	C9	0.12	C1	0.01	C1	-0.21	C8	-0.73	C14	-2.56	C11	-2.56	C5

MEMBER 2

Station		Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending							
								2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic
0%	Max	0.43	C13	0.56	C26	0.52	C26	0.33	C11	0.86	C26	0.23	C3	0.23	C9
	Min	-0.43	C7	0.06	C13	0.06	C13	-0.86	C26	-0.33	C11	-0.23	C9	-0.23	C3
25%	Max	0.43	C13	0.56	C26	0.52	C26	-0.05	C12	1.74	C18	0.69	C11	0.69	C5
	Min	-0.43	C7	0.06	C13	0.06	C13	-1.74	C18	0.05	C12	-0.69	C5	-0.69	C11
50%	Max	0.43	C2	1.34	C32	1.26	C35	0.31	C38	4.98	C32	0.07	C4	0.07	C10
	Min	-0.43	C8	0.10	C3	0.18	C2	-4.98	C32	-0.31	C38	-0.07	C10	-0.07	C4
75%	Max	0.46	C2	0.69	C32	0.45	C32	-0.01	C4	2.61	C22	0.78	C4	0.78	C10
	Min	-0.46	C8	0.02	C12	0.01	C12	-2.61	C22	0.01	C4	-0.78	C10	-0.78	C4
100%	Max	0.46	C2	0.73	C32	0.45	C32	1.10	C5	1.31	C11	0.43	C6	0.43	C12
	Min	-0.46	C8	0.02	C12	0.01	C12	-1.31	C11	-1.10	C5	-0.43	C12	-0.43	C6

MEMBER 3

Station		Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending							
								2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic
0%	Max	0.47	C10	0.93	C11	1.53	C11	0.14	C26	0.76	C23	1.72	C11	1.72	C5
	Min	-0.47	C4	0.07	C8	0.06	C8	-0.76	C23	-0.14	C26	-1.72	C5	-1.72	C11
25%	Max	0.38	C12	0.55	C5	0.67	C5	0.47	C8	2.47	C14	0.71	C10	0.71	C4
	Min	-0.38	C6	0.04	C13	0.06	C8	-2.47	C14	-0.47	C8	-0.71	C4	-0.71	C10
50%	Max	0.35	C12	0.86	C15	0.87	C16	-0.39	C9	3.37	C15	0.14	C7	0.14	C13
	Min	-0.35	C6	0.07	C10	0.19	C9	-3.37	C15	0.39	C9	-0.14	C13	-0.14	C7
75%	Max	0.30	C12	0.36	C14	0.29	C25	-0.07	C13	1.73	C26	0.64	C4	0.64	C10
	Min	-0.30	C6	0.09	C8	0.11	C5	-1.73	C26	0.07	C13	-0.64	C10	-0.64	C4
100%	Max	0.42	C13	0.50	C5	0.77	C5	-0.21	C11	1.17	C26	1.03	C11	1.03	C5
	Min	-0.42	C7	0.05	C13	0.12	C8	-1.17	C26	0.21	C11	-1.03	C5	-1.03	C11

MEMBER 4

Station	Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending								
							2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic	
0%	Max	0.43	C9	0.32	C7	0.50	C2	1.11	C5	0.68	C11	1.37	C10	1.37	C4
	Min	-0.43	C3	0.04	C38	0.00	C38	-0.68	C11	-1.11	C5	-1.37	C4	-1.37	C10
25%	Max	0.43	C8	0.24	C21	0.18	C10	3.07	C16	-0.16	C10	0.35	C4	0.35	C10
	Min	-0.43	C2	0.04	C6	0.00	C38	0.16	C10	-3.07	C16	-0.35	C10	-0.35	C4
50%	Max	0.47	C8	0.34	C11	0.31	C11	6.10	C25	-1.76	C7	0.17	C13	0.17	C7
	Min	-0.47	C2	0.02	C17	0.01	C18	1.76	C7	-6.10	C25	-0.17	C7	-0.17	C13
75%	Max	0.45	C8	0.47	C7	0.51	C8	3.62	C23	-0.22	C5	0.44	C10	0.44	C4
	Min	-0.45	C2	0.09	C11	0.04	C38	0.22	C5	-3.62	C23	-0.44	C4	-0.44	C10
100%	Max	0.58	C7	0.99	C2	1.65	C2	1.37	C19	-0.29	C13	2.20	C8	2.20	C2
	Min	-0.58	C13	0.14	C38	0.04	C38	0.29	C13	-1.37	C19	-2.20	C2	-2.20	C8

MEMBER 37

Station	Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending								
							2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic	
0%	Max	0.71	C4	0.37	C13	0.34	C13	0.28	C4	0.92	C10	0.78	C13	0.78	C7
	Min	-0.71	C10	0.07	C9	0.01	C17	-0.92	C10	-0.28	C4	-0.78	C7	-0.78	C13
25%	Max	0.71	C4	0.37	C13	0.34	C13	1.13	C4	0.56	C10	0.71	C11	0.71	C5
	Min	-0.71	C10	0.07	C9	0.01	C17	-0.56	C10	-1.13	C4	-0.71	C5	-0.71	C11
50%	Max	0.77	C4	1.05	C14	0.85	C12	2.24	C16	0.26	C10	1.55	C11	1.55	C5
	Min	-0.77	C10	0.15	C9	0.15	C33	-0.26	C10	-2.24	C16	-1.55	C5	-1.55	C11
75%	Max	0.77	C4	1.05	C14	0.85	C12	6.97	C15	-0.72	C9	2.52	C4	2.52	C10
	Min	-0.77	C10	0.15	C9	0.15	C33	0.72	C9	-6.97	C15	-2.52	C10	-2.52	C4
100%	Max	0.77	C4	1.05	C14	0.85	C12	11.70	C15	-1.50	C26	6.42	C4	6.42	C10
	Min	-0.77	C10	0.15	C9	0.15	C33	1.50	C26	-11.70	C15	-6.42	C10	-6.42	C4

MEMBER 38

Station	Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending								
							2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic	
0%	Max	0.79	C13	0.37	C3	0.34	C4	0.15	C13	1.08	C19	0.84	C7	0.84	C13
	Min	-0.79	C7	0.06	C6	0.00	C21	-1.08	C19	-0.15	C13	-0.84	C13	-0.84	C7
25%	Max	0.79	C13	0.37	C3	0.34	C4	1.01	C12	0.66	C6	0.75	C10	0.75	C4
	Min	-0.79	C7	0.06	C6	0.00	C21	-0.66	C6	-1.01	C12	-0.75	C4	-0.75	C10
50%	Max	0.83	C13	0.90	C15	0.94	C4	2.08	C24	0.37	C6	1.67	C10	1.67	C4
	Min	-0.83	C7	0.27	C6	0.04	C38	-0.37	C6	-2.08	C24	-1.67	C4	-1.67	C10
75%	Max	0.83	C13	0.90	C15	0.94	C4	8.24	C24	-1.15	C6	2.61	C4	2.61	C10
	Min	-0.83	C7	0.27	C6	0.04	C38	1.15	C6	-8.24	C24	-2.61	C10	-2.61	C4
100%	Max	0.83	C13	0.90	C15	0.94	C4	14.39	C25	-2.67	C7	6.88	C4	6.88	C10
	Min	-0.83	C7	0.27	C6	0.04	C38	2.67	C7	-14.39	C25	-6.88	C10	-6.88	C4

MEMBER 49

Station	Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending								
							2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic	
0%	Max	0.00	C1	0.00	C5	0.00	C6	0.00	C2	0.00	C32	0.00	C11	0.00	C5
	Min	0.00	C1	0.00	C14	0.00	C2	0.00	C32	0.00	C2	0.00	C5	0.00	C11
25%	Max	0.00	C1	0.00	C5	0.00	C6	0.00	C3	0.00	C26	0.00	C11	0.00	C5
	Min	0.00	C1	0.00	C14	0.00	C2	0.00	C26	0.00	C3	0.00	C5	0.00	C11
50%	Max	0.00	C14	0.00	C32	0.00	C5	0.00	C9	0.00	C38	0.00	C2	0.00	C8
	Min	0.00	C1	0.00	C1	0.00	C4	0.00	C38	0.00	C9	0.00	C8	0.00	C2
75%	Max	0.00	C14	0.00	C32	0.00	C5	0.00	C10	0.00	C4	0.00	C2	0.00	C8
	Min	0.00	C1	0.00	C1	0.00	C4	0.00	C4	0.00	C10	0.00	C8	0.00	C2
100%	Max	0.00	C14	0.00	C32	0.00	C5	0.00	C10	0.00	C4	0.00	C2	0.00	C8
	Min	0.00	C1	0.00	C1	0.00	C4	0.00	C4	0.00	C10	0.00	C8	0.00	C2

MEMBER 50

Station	Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending							
							2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic

0%	Max	0.00	C1	0.00	C26	0.00	C5	0.00	C3	0.00	C26	0.00	C34	0.00	C4
	Min	0.00	C1	0.00	C8	0.00	C28	0.00	C26	0.00	C3	0.00	C4	0.00	C34
25%	Max	0.00	C1	0.00	C26	0.00	C5	0.00	C3	0.00	C26	0.00	C10	0.00	C4
	Min	0.00	C1	0.00	C8	0.00	C28	0.00	C26	0.00	C3	0.00	C4	0.00	C10
50%	Max	0.00	C14	0.00	C3	0.00	C5	0.00	C9	0.00	C3	0.00	C11	0.00	C22
	Min	0.00	C26	0.00	C38	0.00	C3	0.00	C3	0.00	C9	0.00	C22	0.00	C11
75%	Max	0.00	C14	0.00	C3	0.00	C5	0.00	C5	0.00	C11	0.00	C11	0.00	C22
	Min	0.00	C26	0.00	C38	0.00	C3	0.00	C11	0.00	C5	0.00	C22	0.00	C11
100%	Max	0.00	C14	0.00	C3	0.00	C5	0.00	C10	0.00	C4	0.00	C7	0.00	C21
	Min	0.00	C26	0.00	C38	0.00	C3	0.00	C4	0.00	C10	0.00	C21	0.00	C7

MEMBER 51

Station	Axial [Kip/in ²]	Ic	Shear V2 [Kip/in ²]	Ic	Shear V3 [Kip/in ²]	Ic	Bending								
							2-Pos [Kip/in ²]	Ic	2-Neg [Kip/in ²]	Ic	3-Pos [Kip/in ²]	Ic	3-Neg [Kip/in ²]	Ic	
0%	Max	0.00	C1	0.00	C4	0.00	C11	0.00	C4	0.00	C10	0.00	C23	0.00	C6
	Min	0.00	C1	0.00	C14	0.00	C3	0.00	C10	0.00	C4	0.00	C6	0.00	C23
25%	Max	0.00	C1	0.00	C4	0.00	C11	0.00	C3	0.00	C9	0.00	C23	0.00	C6
	Min	0.00	C1	0.00	C14	0.00	C3	0.00	C9	0.00	C3	0.00	C6	0.00	C23
50%	Max	0.00	C30	0.00	C10	0.00	C5	0.00	C6	0.00	C17	0.00	C5	0.00	C11
	Min	0.00	C14	0.00	C13	0.00	C10	0.00	C17	0.00	C6	0.00	C11	0.00	C5
75%	Max	0.00	C30	0.00	C10	0.00	C5	0.00	C6	0.00	C22	0.00	C5	0.00	C11
	Min	0.00	C14	0.00	C13	0.00	C10	0.00	C22	0.00	C6	0.00	C11	0.00	C5
100%	Max	0.00	C30	0.00	C10	0.00	C5	0.00	C4	0.00	C22	0.00	C13	0.00	C7
	Min	0.00	C14	0.00	C13	0.00	C10	0.00	C22	0.00	C4	0.00	C7	0.00	C13

MEMBER 52

Station	Axial [Kip/in ²]	Ic	Shear V2 [Kip/in ²]	Ic	Shear V3 [Kip/in ²]	Ic	Bending								
							2-Pos [Kip/in ²]	Ic	2-Neg [Kip/in ²]	Ic	3-Pos [Kip/in ²]	Ic	3-Neg [Kip/in ²]	Ic	
0%	Max	0.00	C1	0.00	C5	0.00	C5	0.00	C14	0.00	C8	0.00	C10	0.00	C4
	Min	0.00	C1	0.00	C1	0.00	C6	0.00	C8	0.00	C14	0.00	C4	0.00	C10
25%	Max	0.00	C1	0.00	C5	0.00	C5	0.00	C14	0.00	C7	0.00	C11	0.00	C5
	Min	0.00	C1	0.00	C1	0.00	C6	0.00	C7	0.00	C14	0.00	C5	0.00	C11
50%	Max	0.00	C2	0.00	C3	0.00	C10	0.00	C2	0.00	C8	0.00	C4	0.00	C10
	Min	0.00	C24	0.00	C1	0.00	C13	0.00	C8	0.00	C2	0.00	C10	0.00	C4
75%	Max	0.00	C2	0.00	C3	0.00	C10	0.00	C2	0.00	C8	0.00	C6	0.00	C12
	Min	0.00	C24	0.00	C1	0.00	C13	0.00	C8	0.00	C2	0.00	C12	0.00	C6
100%	Max	0.00	C2	0.00	C3	0.00	C10	0.00	C30	0.00	C8	0.00	C3	0.00	C17
	Min	0.00	C24	0.00	C1	0.00	C13	0.00	C8	0.00	C30	0.00	C17	0.00	C3

MEMBER 54

Station	Axial [Kip/in ²]	Ic	Shear V2 [Kip/in ²]	Ic	Shear V3 [Kip/in ²]	Ic	Bending								
							2-Pos [Kip/in ²]	Ic	2-Neg [Kip/in ²]	Ic	3-Pos [Kip/in ²]	Ic	3-Neg [Kip/in ²]	Ic	
0%	Max	0.00	C1	0.00	C4	0.00	C16	0.00	C3	0.00	C9	0.00	C9	0.00	C3
	Min	0.00	C1	0.00	C7	0.00	C8	0.00	C9	0.00	C3	0.00	C3	0.00	C9
25%	Max	0.00	C1	0.00	C4	0.00	C16	0.00	C3	0.00	C9	0.00	C10	0.00	C4
	Min	0.00	C1	0.00	C7	0.00	C8	0.00	C9	0.00	C3	0.00	C4	0.00	C10
50%	Max	0.00	C2	0.00	C2	0.00	C4	0.00	C10	0.00	C21	0.00	C10	0.00	C4
	Min	0.00	C1	0.00	C1	0.00	C1	0.00	C21	0.00	C10	0.00	C4	0.00	C10
75%	Max	0.00	C2	0.00	C2	0.00	C4	0.00	C13	0.00	C21	0.00	C5	0.00	C11
	Min	0.00	C1	0.00	C1	0.00	C1	0.00	C21	0.00	C13	0.00	C11	0.00	C5
100%	Max	0.00	C2	0.00	C2	0.00	C4	0.00	C2	0.00	C18	0.00	C4	0.00	C10
	Min	0.00	C1	0.00	C1	0.00	C1	0.00	C18	0.00	C2	0.00	C10	0.00	C4

MEMBER 104

Station	Axial [Kip/in ²]	Ic	Shear V2 [Kip/in ²]	Ic	Shear V3 [Kip/in ²]	Ic	Bending								
							2-Pos [Kip/in ²]	Ic	2-Neg [Kip/in ²]	Ic	3-Pos [Kip/in ²]	Ic	3-Neg [Kip/in ²]	Ic	
0%	Max	0.00	C1	0.00	C4	0.00	C4	0.00	C4	0.00	C10	0.00	C5	0.00	C11
	Min	0.00	C1	0.00	C1	0.00	C1	0.00	C10	0.00	C4	0.00	C11	0.00	C5
25%	Max	0.00	C1	0.00	C4	0.00	C4	0.00	C4	0.00	C10	0.00	C26	0.00	C8
	Min	0.00	C1	0.00	C1	0.00	C1	0.00	C10	0.00	C4	0.00	C8	0.00	C26

50%	Max	0.00	C11	0.00	C4	0.00	C10	0.00	C10	0.00	C4	0.00	C10	0.00	C4
	Min	0.00	C5	0.00	C1	0.00	C18	0.00	C4	0.00	C10	0.00	C4	0.00	C10
75%	Max	0.00	C11	0.00	C4	0.00	C10	0.00	C10	0.00	C4	0.00	C5	0.00	C11
	Min	0.00	C5	0.00	C1	0.00	C18	0.00	C4	0.00	C10	0.00	C11	0.00	C5
100%	Max	0.00	C11	0.00	C4	0.00	C10	0.00	C6	0.00	C12	0.00	C9	0.00	C3
	Min	0.00	C5	0.00	C1	0.00	C18	0.00	C12	0.00	C6	0.00	C3	0.00	C9

MEMBER 105

Station		Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending							
								2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic
0%	Max	0.00	C1	0.00	C3	0.00	C35	0.00	C5	0.00	C26	0.00	C22	0.00	C6
	Min	0.00	C1	0.00	C38	0.00	C38	0.00	C26	0.00	C5	0.00	C6	0.00	C22
25%	Max	0.00	C1	0.00	C3	0.00	C35	0.00	C2	0.00	C26	0.00	C32	0.00	C6
	Min	0.00	C1	0.00	C38	0.00	C38	0.00	C26	0.00	C2	0.00	C6	0.00	C32
50%	Max	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
	Min	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
75%	Max	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
	Min	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
100%	Max	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1
	Min	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1	0.00	C1

MEMBER 110

Station		Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending							
								2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic
0%	Max	0.16	C4	0.65	C25	0.52	C13	0.81	C22	-0.02	C4	0.57	C13	0.57	C7
	Min	-0.16	C10	0.06	C33	0.06	C32	0.02	C4	-0.81	C22	-0.57	C7	-0.57	C13
25%	Max	0.16	C4	0.65	C25	0.52	C13	0.32	C32	0.67	C16	0.60	C4	0.60	C10
	Min	-0.16	C10	0.06	C33	0.06	C32	-0.67	C16	-0.32	C32	-0.60	C10	-0.60	C4
50%	Max	0.16	C4	0.65	C25	0.52	C13	0.34	C26	2.07	C16	1.39	C5	1.39	C11
	Min	-0.16	C10	0.06	C33	0.06	C32	-2.07	C16	-0.34	C26	-1.39	C11	-1.39	C5
75%	Max	0.06	C10	0.61	C18	0.47	C18	0.00	C26	1.96	C15	0.52	C10	0.52	C4
	Min	-0.06	C4	0.05	C10	0.05	C26	-1.96	C15	0.00	C26	-0.52	C4	-0.52	C10
100%	Max	0.06	C10	0.61	C18	0.47	C18	-0.05	C8	0.88	C14	0.55	C8	0.55	C2
	Min	-0.06	C4	0.05	C10	0.05	C26	-0.88	C14	0.05	C8	-0.55	C2	-0.55	C8

MEMBER 111

Station		Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending							
								2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic
0%	Max	0.07	C4	0.85	C22	0.62	C9	0.13	C7	0.74	C25	0.82	C7	0.82	C13
	Min	-0.07	C10	0.12	C5	0.07	C5	-0.74	C25	-0.13	C7	-0.82	C13	-0.82	C7
25%	Max	0.07	C4	0.85	C22	0.62	C9	-0.41	C7	2.58	C25	0.57	C4	0.57	C10
	Min	-0.07	C10	0.12	C5	0.07	C5	-2.58	C25	0.41	C7	-0.57	C10	-0.57	C4
50%	Max	0.16	C10	0.91	C14	0.67	C15	-0.88	C6	3.94	C24	1.15	C10	1.15	C4
	Min	-0.16	C4	0.09	C8	0.07	C9	-3.94	C24	0.88	C6	-1.15	C4	-1.15	C10
75%	Max	0.16	C10	0.91	C14	0.67	C15	-0.45	C6	2.56	C26	0.73	C10	0.73	C4
	Min	-0.16	C4	0.09	C8	0.07	C9	-2.56	C26	0.45	C6	-0.73	C4	-0.73	C10
100%	Max	0.16	C10	0.91	C14	0.67	C15	0.03	C4	1.79	C26	0.43	C12	0.43	C6
	Min	-0.16	C4	0.09	C8	0.07	C9	-1.79	C26	-0.03	C4	-0.43	C6	-0.43	C12

MEMBER 112

Station		Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending							
								2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic
0%	Max	0.11	C4	0.85	C26	0.62	C26	0.75	C30	0.69	C11	1.58	C5	1.58	C11
	Min	-0.11	C10	0.04	C3	0.08	C1	-0.69	C11	-0.75	C30	-1.58	C11	-1.58	C5
25%	Max	0.11	C4	0.85	C26	0.62	C26	0.13	C5	1.47	C23	0.75	C4	0.75	C10
	Min	-0.11	C10	0.04	C3	0.08	C1	-1.47	C23	-0.13	C5	-0.75	C10	-0.75	C4
50%	Max	0.11	C4	0.85	C26	0.62	C26	-0.05	C5	2.37	C26	0.14	C12	0.14	C6
	Min	-0.11	C10	0.04	C3	0.08	C1	-2.37	C26	0.05	C5	-0.14	C6	-0.14	C12
75%	Max	0.14	C10	0.85	C26	0.60	C23	0.11	C4	0.96	C38	0.77	C10	0.77	C4
	Min	-0.14	C4	0.04	C5	0.09	C5	-0.96	C38	-0.11	C4	-0.77	C4	-0.77	C10

100%	Max	0.14	C10	0.85	C26	0.60	C23	1.31	C26	0.07	C11	1.04	C11	1.04	C5
	Min	-0.14	C4	0.04	C5	0.09	C5	-0.07	C11	-1.31	C26	-1.04	C5	-1.04	C11

MEMBER 113

Station		Axial [Kip/in2]	Ic	Shear V2 [Kip/in2]	Ic	Shear V3 [Kip/in2]	Ic	Bending							
								2-Pos [Kip/in2]	Ic	2-Neg [Kip/in2]	Ic	3-Pos [Kip/in2]	Ic	3-Neg [Kip/in2]	Ic
0%	Max	0.14	C4	0.32	C17	0.28	C17	-0.25	C3	2.21	C32	0.86	C4	0.86	C10
	Min	-0.14	C10	0.02	C10	0.02	C10	-2.21	C32	0.25	C3	-0.86	C10	-0.86	C4
25%	Max	0.14	C4	0.32	C17	0.28	C17	-0.09	C13	2.83	C26	0.72	C4	0.72	C10
	Min	-0.14	C10	0.02	C10	0.02	C10	-2.83	C26	0.09	C13	-0.72	C10	-0.72	C4
50%	Max	0.10	C10	0.55	C26	0.41	C26	0.04	C12	2.53	C26	0.62	C9	0.62	C3
	Min	-0.10	C4	0.02	C4	0.02	C4	-2.53	C26	-0.04	C12	-0.62	C3	-0.62	C9
75%	Max	0.10	C10	0.55	C26	0.41	C26	-0.07	C11	1.81	C17	0.67	C10	0.67	C4
	Min	-0.10	C4	0.02	C4	0.02	C4	-1.81	C17	0.07	C11	-0.67	C4	-0.67	C10
100%	Max	0.10	C10	0.55	C26	0.41	C26	-0.04	C10	1.40	C16	0.80	C11	0.80	C5
	Min	-0.10	C4	0.02	C4	0.02	C4	-1.40	C16	0.04	C10	-0.80	C5	-0.80	C11



Current Date: 4/12/2019 11:16 AM

Units system: English

File name: O:\2K\2400\2438B - Crown Castle (on-call Mt Analysis)\2438B.388 CT11160B (828402) T-Mobile\ST\COMM MC-PK12L4-B SQUARE PLATFORM.etz\

Steel Code Check

Report: Summary - For all selected load conditions

Load conditions to be included in design :

C1=1.4D
C2=1.2D+W0
C3=1.2D+W30
C4=1.2D+W60
C5=1.2D+W90
C6=1.2D+W120
C7=1.2D+W150
C8=1.2D-W0
C9=1.2D-W30
C10=1.2D-W60
C11=1.2D-W90
C12=1.2D-W120
C13=1.2D-W150
C14=1.2D+I+WI0
C15=1.2D+I+WI30
C16=1.2D+I+WI60
C17=1.2D+I+WI90
C18=1.2D+I+WI120
C19=1.2D+I+WI150
C20=1.2D+I-WI0
C21=1.2D+I-WI30
C22=1.2D+I-WI60
C23=1.2D+I-WI90
C24=1.2D+I-WI120
C25=1.2D+I-WI150
C26=1.2D+1.5LM+LV
C27=1.2D+1.5LM+WM0
C28=1.2D+1.5LM+WM30
C29=1.2D+1.5LM+WM60
C30=1.2D+1.5LM+WM90
C31=1.2D+1.5LM+WM120
C32=1.2D+1.5LM-LV
C33=1.2D+1.5LM-WM0
C34=1.2D+1.5LM-WM30
C35=1.2D+1.5LM-WM60
C36=1.2D+1.5LM-WM90
C37=1.2D+1.5LM-WM120
C38=1.2D+1.5LV

Description	Section	Member	Ctrl Eq.	Ratio	Status	Reference
	HSS_SQR 4X4X1_4	33	C1 at 100.00%	0.01	OK	Eq. H1-1b
			C10 at 100.00%	0.18	OK	Eq. H1-1b
			C11 at 100.00%	0.20	OK	Eq. H1-1b
			C12 at 100.00%	0.16	OK	Eq. H1-1b
			C13 at 100.00%	0.06	OK	Eq. H1-1b
			C14 at 100.00%	0.05	OK	Eq. H1-1b
			C15 at 100.00%	0.07	OK	Eq. H1-1b
			C16 at 100.00%	0.08	OK	Eq. H1-1b
			C17 at 100.00%	0.08	OK	Eq. H1-1b
			C18 at 100.00%	0.07	OK	Eq. H1-1b
			C19 at 100.00%	0.06	OK	Eq. H1-1b
			C2 at 100.00%	0.13	OK	Eq. H1-1b
			C20 at 100.00%	0.07	OK	Eq. H1-1b
			C21 at 100.00%	0.07	OK	Eq. H1-1b
			C22 at 100.00%	0.07	OK	Eq. H1-1b

C23 at 100.00%	0.06	OK	Eq. H1-1b
C24 at 100.00%	0.05	OK	Eq. H1-1b
C25 at 100.00%	0.04	OK	Eq. H1-1b
C26 at 100.00%	0.10	OK	Sec. F1
C27 at 100.00%	0.05	OK	Eq. H1-1b
C28 at 100.00%	0.05	OK	Eq. H1-1b
C29 at 100.00%	0.05	OK	Eq. H1-1b
C3 at 100.00%	0.16	OK	Eq. H1-1b
C30 at 100.00%	0.05	OK	Eq. H1-1b
C31 at 100.00%	0.05	OK	Eq. H1-1b
C32 at 40.63%	0.02	OK	Eq. H1-1b
C33 at 100.00%	0.05	OK	Eq. H1-1b
C34 at 100.00%	0.05	OK	Eq. H1-1b
C35 at 100.00%	0.05	OK	Eq. H1-1b
C36 at 100.00%	0.05	OK	Eq. H1-1b
C37 at 100.00%	0.05	OK	Eq. H1-1b
C38 at 100.00%	0.09	OK	Sec. F1
C4 at 100.00%	0.21	OK	Eq. H1-1b
C5 at 100.00%	0.22	OK	Eq. H1-1b
C6 at 100.00%	0.18	OK	Eq. H1-1b
C7 at 100.00%	0.10	OK	Eq. H1-1b
C8 at 100.00%	0.15	OK	Eq. H1-1b
C9 at 100.00%	0.19	OK	Eq. H1-1b

36

C1 at 100.00%	0.12	OK	Eq. H1-1b
C10 at 100.00%	0.35	OK	Eq. H1-1b
C11 at 100.00%	0.31	OK	Eq. H1-1b
C12 at 100.00%	0.21	OK	Eq. H1-1b
C13 at 100.00%	0.08	OK	Eq. H1-1b
C14 at 100.00%	0.25	OK	Eq. H1-1b
C15 at 100.00%	0.26	OK	Eq. H1-1b
C16 at 100.00%	0.26	OK	Eq. H1-1b
C17 at 100.00%	0.26	OK	Eq. H1-1b
C18 at 100.00%	0.26	OK	Eq. H1-1b
C19 at 100.00%	0.25	OK	Eq. H1-1b
C2 at 100.00%	0.14	OK	Eq. H1-1b
C20 at 100.00%	0.27	OK	Eq. H1-1b
C21 at 100.00%	0.28	OK	Eq. H1-1b
C22 at 100.00%	0.29	OK	Eq. H1-1b
C23 at 100.00%	0.28	OK	Eq. H1-1b
C24 at 100.00%	0.26	OK	Eq. H1-1b
C25 at 100.00%	0.24	OK	Eq. H1-1b
C26 at 100.00%	0.50	OK	Sec. F1
C27 at 100.00%	0.45	OK	Eq. H1-1b
C28 at 100.00%	0.45	OK	Eq. H1-1b
C29 at 100.00%	0.46	OK	Eq. H1-1b
C3 at 100.00%	0.18	OK	Eq. H1-1b
C30 at 100.00%	0.46	OK	Eq. H1-1b
C31 at 100.00%	0.45	OK	Eq. H1-1b
C32 at 100.00%	0.40	OK	Sec. F1
C33 at 100.00%	0.46	OK	Eq. H1-1b
C34 at 100.00%	0.46	OK	Eq. H1-1b
C35 at 100.00%	0.46	OK	Eq. H1-1b
C36 at 100.00%	0.46	OK	Eq. H1-1b
C37 at 100.00%	0.46	OK	Eq. H1-1b
C38 at 100.00%	0.18	OK	Sec. F1
C4 at 100.00%	0.21	OK	Eq. H1-1b
C5 at 100.00%	0.20	OK	Eq. H1-1b
C6 at 100.00%	0.17	OK	Eq. H1-1b
C7 at 100.00%	0.13	OK	Eq. H1-1b
C8 at 100.00%	0.25	OK	Eq. H1-1b
C9 at 100.00%	0.33	OK	Eq. H1-1b

37

C1 at 100.00%	0.16	OK	Sec. F1
C10 at 100.00%	0.26	OK	Eq. H1-1b
C11 at 100.00%	0.27	OK	Eq. H1-1b
C12 at 100.00%	0.25	OK	Eq. H1-1b
C13 at 100.00%	0.20	OK	Eq. H1-1b
C14 at 100.00%	0.36	OK	Eq. H1-1b
C15 at 100.00%	0.38	OK	Eq. H1-1b
C16 at 100.00%	0.39	OK	Eq. H1-1b
C17 at 100.00%	0.38	OK	Eq. H1-1b

C18 at 100.00%	0.37	OK	Eq. H1-1b
C19 at 100.00%	0.34	OK	Eq. H1-1b
C2 at 100.00%	0.27	OK	Eq. H1-1b
C20 at 100.00%	0.34	OK	Eq. H1-1b
C21 at 100.00%	0.35	OK	Eq. H1-1b
C22 at 100.00%	0.36	OK	Eq. H1-1b
C23 at 100.00%	0.36	OK	Eq. H1-1b
C24 at 100.00%	0.36	OK	Eq. H1-1b
C25 at 100.00%	0.35	OK	Eq. H1-1b
C26 at 100.00%	0.05	OK	Eq. H1-1b
C27 at 100.00%	0.07	OK	Eq. H1-1b
C28 at 100.00%	0.07	OK	Eq. H1-1b
C29 at 100.00%	0.07	OK	Eq. H1-1b
C3 at 100.00%	0.38	OK	Eq. H1-1b
C30 at 100.00%	0.07	OK	Eq. H1-1b
C31 at 100.00%	0.07	OK	Eq. H1-1b
C32 at 100.00%	0.07	OK	Eq. H1-1b
C33 at 100.00%	0.06	OK	Eq. H1-1b
C34 at 100.00%	0.06	OK	Eq. H1-1b
C35 at 100.00%	0.07	OK	Eq. H1-1b
C36 at 100.00%	0.07	OK	Eq. H1-1b
C37 at 100.00%	0.07	OK	Eq. H1-1b
C38 at 100.00%	0.11	OK	Sec. F1
C4 at 100.00%	0.42	OK	Eq. H1-1b
C5 at 100.00%	0.39	OK	Eq. H1-1b
C6 at 100.00%	0.29	OK	Eq. H1-1b
C7 at 100.00%	0.15	OK	Eq. H1-1b
C8 at 100.00%	0.15	OK	Eq. H1-1b
C9 at 100.00%	0.22	OK	Eq. H1-1b

38

C1 at 100.00%	0.20	OK	Sec. F1
C10 at 100.00%	0.40	OK	Eq. H1-1b
C11 at 100.00%	0.42	OK	Eq. H1-1b
C12 at 100.00%	0.37	OK	Eq. H1-1b
C13 at 100.00%	0.28	OK	Eq. H1-1b
C14 at 100.00%	0.45	OK	Eq. H1-1b
C15 at 100.00%	0.45	OK	Eq. H1-1b
C16 at 100.00%	0.45	OK	Eq. H1-1b
C17 at 100.00%	0.44	OK	Eq. H1-1b
C18 at 100.00%	0.42	OK	Eq. H1-1b
C19 at 100.00%	0.41	OK	Eq. H1-1b
C2 at 100.00%	0.35	OK	Eq. H1-1b
C20 at 100.00%	0.43	OK	Eq. H1-1b
C21 at 100.00%	0.44	OK	Eq. H1-1b
C22 at 100.00%	0.46	OK	Eq. H1-1b
C23 at 100.00%	0.46	OK	Eq. H1-1b
C24 at 100.00%	0.45	OK	Eq. H1-1b
C25 at 100.00%	0.44	OK	Eq. H1-1b
C26 at 100.00%	0.17	OK	Sec. F1
C27 at 100.00%	0.19	OK	Eq. H1-1b
C28 at 100.00%	0.20	OK	Eq. H1-1b
C29 at 100.00%	0.19	OK	Eq. H1-1b
C3 at 100.00%	0.38	OK	Eq. H1-1b
C30 at 100.00%	0.19	OK	Eq. H1-1b
C31 at 100.00%	0.19	OK	Eq. H1-1b
C32 at 100.00%	0.20	OK	Sec. F1
C33 at 100.00%	0.19	OK	Eq. H1-1b
C34 at 100.00%	0.19	OK	Eq. H1-1b
C35 at 100.00%	0.20	OK	Eq. H1-1b
C36 at 100.00%	0.20	OK	Eq. H1-1b
C37 at 100.00%	0.20	OK	Eq. H1-1b
C38 at 100.00%	0.15	OK	Sec. F1
C4 at 100.00%	0.36	OK	Eq. H1-1b
C5 at 100.00%	0.29	OK	Eq. H1-1b
C6 at 100.00%	0.20	OK	Eq. H1-1b
C7 at 100.00%	0.10	OK	Eq. H1-1b
C8 at 100.00%	0.23	OK	Eq. H1-1b
C9 at 100.00%	0.33	OK	Eq. H1-1b

110

C1 at 53.13%	0.04	OK	Sec. F1
C10 at 50.00%	0.05	OK	Eq. H1-1b
C11 at 50.00%	0.05	OK	Eq. H1-1b

C12 at 53.13%	0.06	OK	Eq. H1-1b
C13 at 53.13%	0.06	OK	Eq. H1-1b
C14 at 53.13%	0.09	OK	Eq. H1-1b
C15 at 53.13%	0.09	OK	Eq. H1-1b
C16 at 53.13%	0.09	OK	Eq. H1-1b
C17 at 53.13%	0.09	OK	Eq. H1-1b
C18 at 53.13%	0.09	OK	Eq. H1-1b
C19 at 53.13%	0.09	OK	Eq. H1-1b
C2 at 53.13%	0.06	OK	Eq. H1-1b
C20 at 53.13%	0.08	OK	Eq. H1-1b
C21 at 53.13%	0.08	OK	Eq. H1-1b
C22 at 53.13%	0.08	OK	Eq. H1-1b
C23 at 53.13%	0.09	OK	Eq. H1-1b
C24 at 53.13%	0.09	OK	Eq. H1-1b
C25 at 53.13%	0.09	OK	Eq. H1-1b
C26 at 50.00%	0.01	OK	Eq. H1-1b
C27 at 0.00%	0.01	OK	Eq. H1-1b
C28 at 0.00%	0.01	OK	Eq. H1-1b
C29 at 50.00%	0.01	OK	Eq. H1-1b
C3 at 53.13%	0.06	OK	Eq. H1-1b
C30 at 50.00%	0.01	OK	Eq. H1-1b
C31 at 0.00%	0.01	OK	Eq. H1-1b
C32 at 0.00%	0.01	OK	Eq. H1-1b
C33 at 0.00%	0.01	OK	Eq. H1-1b
C34 at 50.00%	0.01	OK	Eq. H1-1b
C35 at 50.00%	0.01	OK	Eq. H1-1b
C36 at 50.00%	0.01	OK	Eq. H1-1b
C37 at 50.00%	0.01	OK	Eq. H1-1b
C38 at 53.13%	0.03	OK	Sec. F1
C4 at 50.00%	0.08	OK	Eq. H1-1b
C5 at 50.00%	0.08	OK	Eq. H1-1b
C6 at 50.00%	0.07	OK	Eq. H1-1b
C7 at 53.13%	0.04	OK	Eq. H1-1b
C8 at 0.00%	0.03	OK	Eq. H1-1b
C9 at 50.00%	0.04	OK	Eq. H1-1b

111

C1 at 46.88%	0.06	OK	Sec. F1
C10 at 50.00%	0.09	OK	Eq. H1-1b
C11 at 50.00%	0.09	OK	Eq. H1-1b
C12 at 50.00%	0.08	OK	Eq. H1-1b
C13 at 46.88%	0.09	OK	Eq. H1-1b
C14 at 46.88%	0.13	OK	Eq. H1-1b
C15 at 46.88%	0.13	OK	Eq. H1-1b
C16 at 46.88%	0.13	OK	Eq. H1-1b
C17 at 46.88%	0.12	OK	Eq. H1-1b
C18 at 46.88%	0.12	OK	Eq. H1-1b
C19 at 46.88%	0.12	OK	Eq. H1-1b
C2 at 46.88%	0.11	OK	Eq. H1-1b
C20 at 46.88%	0.12	OK	Eq. H1-1b
C21 at 46.88%	0.13	OK	Eq. H1-1b
C22 at 46.88%	0.13	OK	Eq. H1-1b
C23 at 46.88%	0.13	OK	Eq. H1-1b
C24 at 46.88%	0.13	OK	Eq. H1-1b
C25 at 46.88%	0.13	OK	Eq. H1-1b
C26 at 50.00%	0.10	OK	Sec. F1
C27 at 50.00%	0.10	OK	Eq. H1-1b
C28 at 50.00%	0.10	OK	Eq. H1-1b
C29 at 50.00%	0.10	OK	Eq. H1-1b
C3 at 46.88%	0.11	OK	Eq. H1-1b
C30 at 50.00%	0.10	OK	Eq. H1-1b
C31 at 50.00%	0.10	OK	Eq. H1-1b
C32 at 50.00%	0.11	OK	Sec. F1
C33 at 50.00%	0.10	OK	Eq. H1-1b
C34 at 50.00%	0.10	OK	Eq. H1-1b
C35 at 50.00%	0.11	OK	Eq. H1-1b
C36 at 50.00%	0.11	OK	Eq. H1-1b
C37 at 50.00%	0.10	OK	Eq. H1-1b
C38 at 46.88%	0.05	OK	Sec. F1
C4 at 46.88%	0.09	OK	Eq. H1-1b
C5 at 46.88%	0.06	OK	Eq. H1-1b
C6 at 50.00%	0.04	OK	Eq. H1-1b
C7 at 46.88%	0.05	OK	Eq. H1-1b

	C8 at 46.88%	0.07	OK	Eq. H1-1b
	C9 at 46.88%	0.08	OK	Eq. H1-1b
112	C1 at 50.00%	0.03	OK	Sec. F1
	C10 at 0.00%	0.06	OK	Eq. H1-1b
	C11 at 0.00%	0.07	OK	Eq. H1-1b
	C12 at 0.00%	0.06	OK	Eq. H1-1b
	C13 at 50.00%	0.04	OK	Eq. H1-1b
	C14 at 50.00%	0.07	OK	Eq. H1-1b
	C15 at 50.00%	0.06	OK	Eq. H1-1b
	C16 at 50.00%	0.06	OK	Eq. H1-1b
	C17 at 50.00%	0.06	OK	Eq. H1-1b
	C18 at 50.00%	0.06	OK	Eq. H1-1b
	C19 at 50.00%	0.07	OK	Eq. H1-1b
	C2 at 50.00%	0.03	OK	Eq. H1-1b
	C20 at 50.00%	0.07	OK	Eq. H1-1b
	C21 at 50.00%	0.07	OK	Eq. H1-1b
	C22 at 50.00%	0.07	OK	Eq. H1-1b
	C23 at 50.00%	0.07	OK	Eq. H1-1b
	C24 at 50.00%	0.07	OK	Eq. H1-1b
	C25 at 50.00%	0.07	OK	Eq. H1-1b
	C26 at 53.13%	0.08	OK	Sec. F1
	C27 at 53.13%	0.06	OK	Eq. H1-1b
	C28 at 53.13%	0.06	OK	Eq. H1-1b
	C29 at 53.13%	0.05	OK	Eq. H1-1b
	C3 at 0.00%	0.04	OK	Eq. H1-1b
	C30 at 53.13%	0.05	OK	Eq. H1-1b
	C31 at 53.13%	0.05	OK	Eq. H1-1b
	C32 at 50.00%	0.04	OK	Sec. F1
	C33 at 53.13%	0.06	OK	Eq. H1-1b
	C34 at 53.13%	0.06	OK	Eq. H1-1b
	C35 at 53.13%	0.06	OK	Eq. H1-1b
	C36 at 53.13%	0.06	OK	Eq. H1-1b
	C37 at 53.13%	0.06	OK	Eq. H1-1b
	C38 at 53.13%	0.06	OK	Sec. F1
	C4 at 0.00%	0.06	OK	Eq. H1-1b
	C5 at 0.00%	0.06	OK	Eq. H1-1b
	C6 at 0.00%	0.05	OK	Eq. H1-1b
	C7 at 53.13%	0.02	OK	Eq. H1-1b
	C8 at 53.13%	0.04	OK	Eq. H1-1b
	C9 at 53.13%	0.06	OK	Eq. H1-1b
113	C1 at 50.00%	0.03	OK	Sec. F1
	C10 at 0.00%	0.05	OK	Eq. H1-1b
	C11 at 0.00%	0.04	OK	Eq. H1-1b
	C12 at 0.00%	0.03	OK	Eq. H1-1b
	C13 at 100.00%	0.02	OK	Eq. H1-1b
	C14 at 50.00%	0.06	OK	Eq. H1-1b
	C15 at 50.00%	0.07	OK	Eq. H1-1b
	C16 at 50.00%	0.07	OK	Eq. H1-1b
	C17 at 50.00%	0.07	OK	Eq. H1-1b
	C18 at 50.00%	0.07	OK	Eq. H1-1b
	C19 at 50.00%	0.07	OK	Eq. H1-1b
	C2 at 50.00%	0.03	OK	Eq. H1-1b
	C20 at 50.00%	0.07	OK	Eq. H1-1b
	C21 at 50.00%	0.07	OK	Eq. H1-1b
	C22 at 50.00%	0.06	OK	Eq. H1-1b
	C23 at 50.00%	0.06	OK	Eq. H1-1b
	C24 at 50.00%	0.06	OK	Eq. H1-1b
	C25 at 50.00%	0.06	OK	Eq. H1-1b
	C26 at 46.88%	0.11	OK	Sec. F1
	C27 at 46.88%	0.08	OK	Eq. H1-1b
	C28 at 46.88%	0.08	OK	Eq. H1-1b
	C29 at 46.88%	0.08	OK	Eq. H1-1b
	C3 at 100.00%	0.05	OK	Eq. H1-1b
	C30 at 46.88%	0.08	OK	Eq. H1-1b
	C31 at 46.88%	0.08	OK	Eq. H1-1b
	C32 at 0.00%	0.07	OK	Sec. F1
	C33 at 46.88%	0.08	OK	Eq. H1-1b
	C34 at 46.88%	0.08	OK	Eq. H1-1b
	C35 at 46.88%	0.08	OK	Eq. H1-1b
	C36 at 46.88%	0.08	OK	Eq. H1-1b

PIPE 2-1_2x0.203

30

C37 at 46.88%	0.08	OK	Eq. H1-1b
C38 at 46.88%	0.06	OK	Sec. F1
C4 at 100.00%	0.05	OK	Eq. H1-1b
C5 at 46.88%	0.06	OK	Eq. H1-1b
C6 at 46.88%	0.06	OK	Eq. H1-1b
C7 at 50.00%	0.05	OK	Eq. H1-1b
C8 at 50.00%	0.05	OK	Eq. H1-1b
C9 at 0.00%	0.04	OK	Eq. H1-1b

C1 at 43.75%	0.01	OK	Sec. E1
C10 at 43.75%	0.36	OK	Eq. H1-1b
C11 at 43.75%	0.27	OK	Eq. H1-1b
C12 at 43.75%	0.36	OK	Eq. H1-1b
C13 at 43.75%	0.36	OK	Eq. H1-1b
C14 at 43.75%	0.06	OK	Eq. H1-1b
C15 at 43.75%	0.06	OK	Eq. H1-1b
C16 at 43.75%	0.07	OK	Eq. H1-1b
C17 at 43.75%	0.06	OK	Eq. H1-1b
C18 at 43.75%	0.07	OK	Eq. H1-1b
C19 at 43.75%	0.06	OK	Eq. H1-1b
C2 at 43.75%	0.27	OK	Eq. H1-1b
C20 at 43.75%	0.06	OK	Eq. H1-1b
C21 at 43.75%	0.06	OK	Eq. H1-1b
C22 at 43.75%	0.07	OK	Eq. H1-1b
C23 at 43.75%	0.06	OK	Eq. H1-1b
C24 at 43.75%	0.07	OK	Eq. H1-1b
C25 at 43.75%	0.06	OK	Eq. H1-1b
C26 at 43.75%	0.01	OK	Sec. E1
C27 at 43.75%	0.02	OK	Eq. H1-1b
C28 at 43.75%	0.02	OK	Eq. H1-1b
C29 at 43.75%	0.02	OK	Eq. H1-1b
C3 at 43.75%	0.36	OK	Eq. H1-1b
C30 at 43.75%	0.02	OK	Eq. H1-1b
C31 at 43.75%	0.02	OK	Eq. H1-1b
C32 at 43.75%	0.01	OK	Sec. E1
C33 at 43.75%	0.02	OK	Eq. H1-1b
C34 at 43.75%	0.02	OK	Eq. H1-1b
C35 at 43.75%	0.02	OK	Eq. H1-1b
C36 at 43.75%	0.02	OK	Eq. H1-1b
C37 at 43.75%	0.02	OK	Eq. H1-1b
C38 at 43.75%	0.01	OK	Sec. E1
C4 at 43.75%	0.36	OK	Eq. H1-1b
C5 at 43.75%	0.27	OK	Eq. H1-1b
C6 at 43.75%	0.36	OK	Eq. H1-1b
C7 at 43.75%	0.36	OK	Eq. H1-1b
C8 at 43.75%	0.27	OK	Eq. H1-1b
C9 at 43.75%	0.36	OK	Eq. H1-1b

49

C1 at 43.75%	0.00	OK	Sec. E1
C10 at 43.75%	0.12	OK	Eq. H1-1b
C11 at 43.75%	0.09	OK	Eq. H1-1b
C12 at 43.75%	0.12	OK	Eq. H1-1b
C13 at 43.75%	0.12	OK	Eq. H1-1b
C14 at 43.75%	0.02	OK	Eq. H1-1b
C15 at 43.75%	0.02	OK	Eq. H1-1b
C16 at 43.75%	0.03	OK	Eq. H1-1b
C17 at 43.75%	0.02	OK	Eq. H1-1b
C18 at 43.75%	0.03	OK	Eq. H1-1b
C19 at 43.75%	0.02	OK	Eq. H1-1b
C2 at 43.75%	0.09	OK	Eq. H1-1b
C20 at 43.75%	0.02	OK	Eq. H1-1b
C21 at 43.75%	0.02	OK	Eq. H1-1b
C22 at 43.75%	0.03	OK	Eq. H1-1b
C23 at 43.75%	0.02	OK	Eq. H1-1b
C24 at 43.75%	0.03	OK	Eq. H1-1b
C25 at 43.75%	0.02	OK	Eq. H1-1b
C26 at 43.75%	0.00	OK	Sec. E1
C27 at 43.75%	0.01	OK	Eq. H1-1b
C28 at 43.75%	0.01	OK	Eq. H1-1b
C29 at 43.75%	0.01	OK	Eq. H1-1b
C3 at 43.75%	0.12	OK	Eq. H1-1b
C30 at 43.75%	0.01	OK	Eq. H1-1b

	C31 at 43.75%	0.01	OK	Eq. H1-1b
	C32 at 43.75%	0.00	OK	Sec. E1
	C33 at 43.75%	0.01	OK	Eq. H1-1b
	C34 at 43.75%	0.01	OK	Eq. H1-1b
	C35 at 43.75%	0.01	OK	Eq. H1-1b
	C36 at 43.75%	0.01	OK	Eq. H1-1b
	C37 at 43.75%	0.01	OK	Eq. H1-1b
	C38 at 43.75%	0.00	OK	Sec. E1
	C4 at 43.75%	0.12	OK	Eq. H1-1b
	C5 at 43.75%	0.09	OK	Eq. H1-1b
	C6 at 43.75%	0.12	OK	Eq. H1-1b
	C7 at 43.75%	0.12	OK	Eq. H1-1b
	C8 at 43.75%	0.09	OK	Eq. H1-1b
	C9 at 43.75%	0.12	OK	Eq. H1-1b

50	C1 at 43.75%	0.02	OK	Sec. E1
	C10 at 43.75%	0.36	OK	Eq. H1-1b
	C11 at 43.75%	0.27	OK	Eq. H1-1b
	C12 at 43.75%	0.36	OK	Eq. H1-1b
	C13 at 43.75%	0.36	OK	Eq. H1-1b
	C14 at 43.75%	0.06	OK	Eq. H1-1b
	C15 at 43.75%	0.06	OK	Eq. H1-1b
	C16 at 43.75%	0.08	OK	Eq. H1-1b
	C17 at 43.75%	0.06	OK	Eq. H1-1b
	C18 at 43.75%	0.08	OK	Eq. H1-1b
	C19 at 43.75%	0.06	OK	Eq. H1-1b
	C2 at 43.75%	0.27	OK	Eq. H1-1b
	C20 at 43.75%	0.06	OK	Eq. H1-1b
	C21 at 43.75%	0.06	OK	Eq. H1-1b
	C22 at 43.75%	0.08	OK	Eq. H1-1b
	C23 at 43.75%	0.06	OK	Eq. H1-1b
	C24 at 43.75%	0.08	OK	Eq. H1-1b
	C25 at 43.75%	0.06	OK	Eq. H1-1b
	C26 at 43.75%	0.01	OK	Sec. E1
	C27 at 43.75%	0.02	OK	Eq. H1-1b
	C28 at 43.75%	0.02	OK	Eq. H1-2
	C29 at 43.75%	0.03	OK	Eq. H1-1b
	C3 at 43.75%	0.36	OK	Eq. H1-1b
	C30 at 43.75%	0.02	OK	Eq. H1-1b
	C31 at 43.75%	0.03	OK	Eq. H1-1b
	C32 at 43.75%	0.01	OK	Sec. E1
	C33 at 43.75%	0.02	OK	Eq. H1-1b
	C34 at 43.75%	0.02	OK	Eq. H1-2
	C35 at 43.75%	0.03	OK	Eq. H1-1b
	C36 at 43.75%	0.02	OK	Eq. H1-1b
	C37 at 43.75%	0.03	OK	Eq. H1-1b
	C38 at 43.75%	0.01	OK	Sec. E1
	C4 at 43.75%	0.36	OK	Eq. H1-1b
	C5 at 43.75%	0.27	OK	Eq. H1-1b
	C6 at 43.75%	0.36	OK	Eq. H1-1b
	C7 at 43.75%	0.36	OK	Eq. H1-1b
	C8 at 43.75%	0.27	OK	Eq. H1-1b
	C9 at 43.75%	0.36	OK	Eq. H1-1b

51	C1 at 43.75%	0.00	OK	Sec. E1
	C10 at 43.75%	0.12	OK	Eq. H1-1b
	C11 at 43.75%	0.09	OK	Eq. H1-1b
	C12 at 43.75%	0.12	OK	Eq. H1-1b
	C13 at 43.75%	0.12	OK	Eq. H1-1b
	C14 at 43.75%	0.02	OK	Eq. H1-1b
	C15 at 43.75%	0.02	OK	Eq. H1-1b
	C16 at 43.75%	0.03	OK	Eq. H1-1b
	C17 at 43.75%	0.02	OK	Eq. H1-1b
	C18 at 43.75%	0.03	OK	Eq. H1-1b
	C19 at 43.75%	0.02	OK	Eq. H1-1b
	C2 at 43.75%	0.09	OK	Eq. H1-1b
	C20 at 43.75%	0.02	OK	Eq. H1-1b
	C21 at 43.75%	0.02	OK	Eq. H1-1b
	C22 at 43.75%	0.03	OK	Eq. H1-1b
	C23 at 43.75%	0.02	OK	Eq. H1-1b
	C24 at 43.75%	0.03	OK	Eq. H1-1b
	C25 at 43.75%	0.02	OK	Eq. H1-1b

	C26 at 43.75%	0.00	OK	Sec. E1
	C27 at 43.75%	0.01	OK	Eq. H1-1b
	C28 at 43.75%	0.01	OK	Eq. H1-1b
	C29 at 43.75%	0.01	OK	Eq. H1-1b
	C3 at 43.75%	0.12	OK	Eq. H1-1b
	C30 at 43.75%	0.01	OK	Eq. H1-1b
	C31 at 43.75%	0.01	OK	Eq. H1-1b
	C32 at 43.75%	0.00	OK	Sec. E1
	C33 at 43.75%	0.01	OK	Eq. H1-1b
	C34 at 43.75%	0.01	OK	Eq. H1-1b
	C35 at 43.75%	0.01	OK	Eq. H1-1b
	C36 at 43.75%	0.01	OK	Eq. H1-1b
	C37 at 43.75%	0.01	OK	Eq. H1-1b
	C38 at 43.75%	0.00	OK	Sec. E1
	C4 at 43.75%	0.12	OK	Eq. H1-1b
	C5 at 43.75%	0.09	OK	Eq. H1-1b
	C6 at 43.75%	0.12	OK	Eq. H1-1b
	C7 at 43.75%	0.12	OK	Eq. H1-1b
	C8 at 43.75%	0.09	OK	Eq. H1-1b
	C9 at 43.75%	0.12	OK	Eq. H1-1b
52	C1 at 43.75%	0.02	OK	Sec. E1
	C10 at 43.75%	0.36	OK	Eq. H1-1b
	C11 at 43.75%	0.27	OK	Eq. H1-1b
	C12 at 43.75%	0.36	OK	Eq. H1-1b
	C13 at 43.75%	0.36	OK	Eq. H1-1b
	C14 at 43.75%	0.06	OK	Eq. H1-1b
	C15 at 43.75%	0.06	OK	Eq. H1-1b
	C16 at 43.75%	0.08	OK	Eq. H1-1b
	C17 at 43.75%	0.06	OK	Eq. H1-1b
	C18 at 43.75%	0.08	OK	Eq. H1-1b
	C19 at 43.75%	0.06	OK	Eq. H1-1b
	C2 at 43.75%	0.27	OK	Eq. H1-1b
	C20 at 43.75%	0.06	OK	Eq. H1-1b
	C21 at 43.75%	0.06	OK	Eq. H1-1b
	C22 at 43.75%	0.08	OK	Eq. H1-1b
	C23 at 43.75%	0.06	OK	Eq. H1-1b
	C24 at 43.75%	0.08	OK	Eq. H1-1b
	C25 at 43.75%	0.06	OK	Eq. H1-1b
	C26 at 43.75%	0.01	OK	Sec. E1
	C27 at 43.75%	0.02	OK	Eq. H1-1b
	C28 at 43.75%	0.02	OK	Eq. H1-2
	C29 at 43.75%	0.03	OK	Eq. H1-1b
	C3 at 43.75%	0.36	OK	Eq. H1-1b
	C30 at 43.75%	0.02	OK	Eq. H1-1b
	C31 at 43.75%	0.03	OK	Eq. H1-1b
	C32 at 43.75%	0.01	OK	Sec. E1
	C33 at 43.75%	0.02	OK	Eq. H1-1b
	C34 at 43.75%	0.02	OK	Eq. H1-2
	C35 at 43.75%	0.03	OK	Eq. H1-1b
	C36 at 43.75%	0.02	OK	Eq. H1-1b
	C37 at 43.75%	0.03	OK	Eq. H1-1b
	C38 at 43.75%	0.01	OK	Sec. E1
	C4 at 43.75%	0.36	OK	Eq. H1-1b
	C5 at 43.75%	0.27	OK	Eq. H1-1b
	C6 at 43.75%	0.36	OK	Eq. H1-1b
	C7 at 43.75%	0.36	OK	Eq. H1-1b
	C8 at 43.75%	0.27	OK	Eq. H1-1b
	C9 at 43.75%	0.36	OK	Eq. H1-1b
54	C1 at 43.75%	0.01	OK	Sec. E1
	C10 at 43.75%	0.12	OK	Eq. H1-1b
	C11 at 43.75%	0.09	OK	Eq. H1-1b
	C12 at 43.75%	0.12	OK	Eq. H1-1b
	C13 at 43.75%	0.12	OK	Eq. H1-1b
	C14 at 43.75%	0.02	OK	Eq. H1-1b
	C15 at 43.75%	0.02	OK	Eq. H1-2
	C16 at 43.75%	0.03	OK	Eq. H1-1b
	C17 at 43.75%	0.02	OK	Eq. H1-1b
	C18 at 43.75%	0.03	OK	Eq. H1-1b
	C19 at 43.75%	0.02	OK	Eq. H1-2
	C2 at 43.75%	0.09	OK	Eq. H1-1b

C20 at 43.75%	0.02	OK	Eq. H1-1b
C21 at 43.75%	0.02	OK	Eq. H1-2
C22 at 43.75%	0.03	OK	Eq. H1-1b
C23 at 43.75%	0.02	OK	Eq. H1-1b
C24 at 43.75%	0.03	OK	Eq. H1-1b
C25 at 43.75%	0.02	OK	Eq. H1-2
C26 at 43.75%	0.01	OK	Sec. E1
C27 at 43.75%	0.01	OK	Eq. H1-1b
C28 at 43.75%	0.01	OK	Eq. H1-1b
C29 at 43.75%	0.01	OK	Eq. H1-1b
C3 at 43.75%	0.12	OK	Eq. H1-1b
C30 at 43.75%	0.01	OK	Eq. H1-1b
C31 at 43.75%	0.01	OK	Eq. H1-1b
C32 at 43.75%	0.01	OK	Sec. E1
C33 at 43.75%	0.01	OK	Eq. H1-1b
C34 at 43.75%	0.01	OK	Eq. H1-1b
C35 at 43.75%	0.01	OK	Eq. H1-1b
C36 at 43.75%	0.01	OK	Eq. H1-1b
C37 at 43.75%	0.01	OK	Eq. H1-1b
C38 at 43.75%	0.01	OK	Sec. E1
C4 at 43.75%	0.12	OK	Eq. H1-1b
C5 at 43.75%	0.09	OK	Eq. H1-1b
C6 at 43.75%	0.12	OK	Eq. H1-1b
C7 at 43.75%	0.12	OK	Eq. H1-1b
C8 at 43.75%	0.09	OK	Eq. H1-1b
C9 at 43.75%	0.12	OK	Eq. H1-1b

104

C1 at 0.00%	0.00	OK	Eq. H1-1b
C10 at 0.00%	0.00	OK	Eq. H1-1b
C11 at 43.75%	0.00	OK	Eq. Sec. D2
C12 at 0.00%	0.00	OK	Eq. H1-1b
C13 at 40.63%	0.00	OK	Eq. H1-1b
C14 at 0.00%	0.00	OK	Eq. H1-1b
C15 at 0.00%	0.00	OK	Eq. H1-1b
C16 at 0.00%	0.00	OK	Eq. H1-1b
C17 at 0.00%	0.00	OK	Eq. H1-1b
C18 at 0.00%	0.00	OK	Eq. H1-1b
C19 at 0.00%	0.00	OK	Eq. H1-1b
C2 at 40.63%	0.00	OK	Eq. H1-1b
C20 at 0.00%	0.00	OK	Eq. H1-1b
C21 at 0.00%	0.00	OK	Eq. H1-1b
C22 at 0.00%	0.00	OK	Eq. H1-1b
C23 at 0.00%	0.00	OK	Eq. H1-1b
C24 at 0.00%	0.00	OK	Eq. H1-1b
C25 at 0.00%	0.00	OK	Eq. H1-1b
C26 at 43.75%	0.00	OK	Eq. H1-1b
C27 at 0.00%	0.00	OK	Eq. H1-1b
C28 at 0.00%	0.00	OK	Eq. H1-1b
C29 at 0.00%	0.00	OK	Eq. H1-1b
C3 at 0.00%	0.00	OK	Eq. H1-1b
C30 at 0.00%	0.00	OK	Eq. H1-1b
C31 at 0.00%	0.00	OK	Eq. H1-1b
C32 at 0.00%	0.00	OK	Eq. H1-1b
C33 at 0.00%	0.00	OK	Eq. H1-1b
C34 at 0.00%	0.00	OK	Eq. H1-1b
C35 at 0.00%	0.00	OK	Eq. H1-1b
C36 at 0.00%	0.00	OK	Eq. H1-1b
C37 at 0.00%	0.00	OK	Eq. H1-1b
C38 at 43.75%	0.00	OK	Eq. H1-1b
C4 at 0.00%	0.00	OK	Eq. H1-1b
C5 at 43.75%	0.00	OK	Sec. E1
C6 at 0.00%	0.00	OK	Eq. H1-1b
C7 at 0.00%	0.00	OK	Eq. H1-1b
C8 at 40.63%	0.00	OK	Eq. H1-1b
C9 at 0.00%	0.00	OK	Eq. H1-1b

105

C1 at 0.00%	0.00	OK	Eq. H1-1b
C10 at 40.63%	0.00	OK	Eq. H1-1b
C11 at 0.00%	0.00	OK	Eq. H1-1b
C12 at 40.63%	0.00	OK	Eq. H1-1b
C13 at 40.63%	0.00	OK	Eq. H1-1b
C14 at 0.00%	0.00	OK	Eq. H1-1b

C15 at 0.00%	0.00	OK	Eq. H1-1b
C16 at 0.00%	0.00	OK	Eq. H1-1b
C17 at 0.00%	0.00	OK	Eq. H1-1b
C18 at 0.00%	0.00	OK	Eq. H1-1b
C19 at 0.00%	0.00	OK	Eq. H1-1b
C2 at 40.63%	0.00	OK	Eq. H1-1b
C20 at 0.00%	0.00	OK	Eq. H1-1b
C21 at 0.00%	0.00	OK	Eq. H1-1b
C22 at 0.00%	0.00	OK	Eq. H1-1b
C23 at 0.00%	0.00	OK	Eq. H1-1b
C24 at 0.00%	0.00	OK	Eq. H1-1b
C25 at 0.00%	0.00	OK	Eq. H1-1b
C26 at 43.75%	0.04	OK	Sec. E1
C27 at 43.75%	0.04	OK	Sec. E1
C28 at 43.75%	0.04	OK	Sec. E1
C29 at 43.75%	0.04	OK	Sec. E1
C3 at 0.00%	0.00	OK	Eq. H1-1b
C30 at 43.75%	0.04	OK	Sec. E1
C31 at 43.75%	0.04	OK	Sec. E1
C32 at 43.75%	0.04	OK	Sec. E1
C33 at 43.75%	0.04	OK	Sec. E1
C34 at 43.75%	0.04	OK	Sec. E1
C35 at 43.75%	0.04	OK	Sec. E1
C36 at 43.75%	0.04	OK	Sec. E1
C37 at 43.75%	0.04	OK	Sec. E1
C38 at 0.00%	0.00	OK	Eq. H1-1b
C4 at 0.00%	0.00	OK	Eq. H1-1b
C5 at 0.00%	0.00	OK	Eq. H1-1b
C6 at 40.63%	0.00	OK	Eq. H1-1b
C7 at 40.63%	0.00	OK	Eq. H1-1b
C8 at 0.00%	0.00	OK	Eq. H1-1b
C9 at 40.63%	0.00	OK	Eq. H1-1b

PIPE 4x0.237

1

C1 at 33.33%	0.10	OK	Sec. F1
C10 at 65.63%	0.17	OK	Eq. H1-1b
C11 at 33.33%	0.19	OK	Eq. H1-1b
C12 at 33.33%	0.19	OK	Eq. H1-1b
C13 at 33.33%	0.15	OK	Eq. H1-1b
C14 at 33.33%	0.21	OK	Eq. H1-1b
C15 at 33.33%	0.21	OK	Eq. H1-1b
C16 at 33.33%	0.21	OK	Eq. H1-1b
C17 at 33.33%	0.21	OK	Eq. H1-1b
C18 at 33.33%	0.20	OK	Eq. H1-1b
C19 at 33.33%	0.20	OK	Eq. H1-1b
C2 at 33.33%	0.14	OK	Eq. H1-1b
C20 at 33.33%	0.19	OK	Eq. H1-1b
C21 at 33.33%	0.20	OK	Eq. H1-1b
C22 at 33.33%	0.21	OK	Eq. H1-1b
C23 at 33.33%	0.22	OK	Eq. H1-1b
C24 at 33.33%	0.22	OK	Eq. H1-1b
C25 at 33.33%	0.21	OK	Eq. H1-1b
C26 at 33.33%	0.19	OK	Sec. F1
C27 at 33.33%	0.18	OK	Eq. H1-1b
C28 at 33.33%	0.18	OK	Eq. H1-1b
C29 at 33.33%	0.18	OK	Eq. H1-1b
C3 at 33.33%	0.17	OK	Eq. H1-1b
C30 at 33.33%	0.18	OK	Eq. H1-1b
C31 at 33.33%	0.18	OK	Eq. H1-1b
C32 at 33.33%	0.17	OK	Sec. F1
C33 at 33.33%	0.17	OK	Eq. H1-1b
C34 at 33.33%	0.18	OK	Eq. H1-1b
C35 at 33.33%	0.18	OK	Eq. H1-1b
C36 at 33.33%	0.18	OK	Eq. H1-1b
C37 at 33.33%	0.18	OK	Eq. H1-1b
C38 at 33.33%	0.10	OK	Sec. F1
C4 at 33.33%	0.17	OK	Eq. H1-1b
C5 at 33.33%	0.15	OK	Eq. H1-1b
C6 at 33.33%	0.11	OK	Eq. H1-1b
C7 at 91.67%	0.08	OK	Eq. H1-1b
C8 at 65.63%	0.10	OK	Eq. H1-1b
C9 at 65.63%	0.15	OK	Eq. H1-1b

2	C1 at 65.63%	0.06	OK	Sec. F1
	C10 at 65.63%	0.18	OK	Eq. H1-1b
	C11 at 65.63%	0.17	OK	Eq. H1-1b
	C12 at 65.63%	0.13	OK	Eq. H1-1b
	C13 at 65.63%	0.08	OK	Eq. H1-1b
	C14 at 65.63%	0.14	OK	Eq. H1-1b
	C15 at 65.63%	0.14	OK	Eq. H1-1b
	C16 at 65.63%	0.14	OK	Eq. H1-1b
	C17 at 65.63%	0.14	OK	Eq. H1-1b
	C18 at 65.63%	0.14	OK	Eq. H1-1b
	C19 at 65.63%	0.14	OK	Eq. H1-1b
	C2 at 65.63%	0.07	OK	Eq. H1-1b
	C20 at 65.63%	0.15	OK	Eq. H1-1b
	C21 at 65.63%	0.15	OK	Eq. H1-1b
	C22 at 65.63%	0.16	OK	Eq. H1-1b
	C23 at 65.63%	0.16	OK	Eq. H1-1b
	C24 at 65.63%	0.15	OK	Eq. H1-1b
	C25 at 65.63%	0.14	OK	Eq. H1-1b
	C26 at 66.67%	0.15	OK	Sec. F1
	C27 at 66.67%	0.14	OK	Eq. H1-1b
	C28 at 66.67%	0.14	OK	Eq. H1-1b
	C29 at 66.67%	0.14	OK	Eq. H1-1b
	C3 at 33.33%	0.10	OK	Eq. H1-1b
	C30 at 66.67%	0.14	OK	Eq. H1-1b
	C31 at 66.67%	0.14	OK	Eq. H1-1b
	C32 at 50.00%	0.17	OK	Sec. F1
	C33 at 66.67%	0.15	OK	Eq. H1-1b
	C34 at 66.67%	0.15	OK	Eq. H1-1b
	C35 at 66.67%	0.15	OK	Eq. H1-1b
	C36 at 66.67%	0.15	OK	Eq. H1-1b
	C37 at 66.67%	0.15	OK	Eq. H1-1b
	C38 at 65.63%	0.05	OK	Sec. F1
	C4 at 33.33%	0.13	OK	Eq. H1-1b
	C5 at 33.33%	0.14	OK	Eq. H1-1b
	C6 at 33.33%	0.12	OK	Eq. H1-1b
	C7 at 33.33%	0.10	OK	Eq. H1-1b
	C8 at 65.63%	0.10	OK	Eq. H1-1b
	C9 at 65.63%	0.16	OK	Eq. H1-1b

3	C1 at 33.33%	0.06	OK	Eq. H1-1b
	C10 at 8.33%	0.10	OK	Eq. H1-1b
	C11 at 32.29%	0.10	OK	Eq. H1-1b
	C12 at 8.33%	0.12	OK	Eq. H1-1b
	C13 at 8.33%	0.12	OK	Eq. H1-1b
	C14 at 33.33%	0.13	OK	Eq. H1-1b
	C15 at 33.33%	0.14	OK	Eq. H1-1b
	C16 at 33.33%	0.14	OK	Eq. H1-1b
	C17 at 33.33%	0.13	OK	Eq. H1-1b
	C18 at 33.33%	0.12	OK	Eq. H1-1b
	C19 at 33.33%	0.11	OK	Eq. H1-1b
	C2 at 33.33%	0.14	OK	Eq. H1-1b
	C20 at 33.33%	0.11	OK	Eq. H1-1b
	C21 at 33.33%	0.12	OK	Eq. H1-1b
	C22 at 33.33%	0.12	OK	Eq. H1-1b
	C23 at 33.33%	0.13	OK	Eq. H1-1b
	C24 at 33.33%	0.13	OK	Eq. H1-1b
	C25 at 33.33%	0.13	OK	Eq. H1-1b
	C26 at 65.63%	0.11	OK	Sec. F1
	C27 at 65.63%	0.09	OK	Eq. H1-1b
	C28 at 65.63%	0.09	OK	Eq. H1-1b
	C29 at 65.63%	0.09	OK	Eq. H1-1b
	C3 at 33.33%	0.16	OK	Eq. H1-1b
	C30 at 65.63%	0.09	OK	Eq. H1-1b
	C31 at 65.63%	0.09	OK	Eq. H1-1b
	C32 at 65.63%	0.06	OK	Sec. F1
	C33 at 65.63%	0.09	OK	Eq. H1-1b
	C34 at 65.63%	0.09	OK	Eq. H1-1b
	C35 at 65.63%	0.09	OK	Eq. H1-1b
	C36 at 65.63%	0.09	OK	Eq. H1-1b
	C37 at 65.63%	0.08	OK	Eq. H1-1b
	C38 at 65.63%	0.08	OK	Sec. F1
	C4 at 33.33%	0.16	OK	Eq. H1-1b

	C5 at 32.29%	0.13	OK	Eq. H1-1b
	C6 at 8.33%	0.12	OK	Eq. H1-1b
	C7 at 8.33%	0.11	OK	Eq. H1-1b
	C8 at 8.33%	0.08	OK	Eq. H1-1b
	C9 at 8.33%	0.09	OK	Eq. H1-1b
<hr/>				
4	C1 at 66.07%	0.10	OK	Sec. F1
	C10 at 66.07%	0.16	OK	Eq. H1-1b
	C11 at 66.07%	0.17	OK	Eq. H1-1b
	C12 at 66.07%	0.17	OK	Eq. H1-1b
	C13 at 66.07%	0.15	OK	Eq. H1-1b
	C14 at 66.07%	0.23	OK	Eq. H1-1b
	C15 at 66.07%	0.23	OK	Eq. H1-1b
	C16 at 66.07%	0.23	OK	Eq. H1-1b
	C17 at 66.07%	0.22	OK	Eq. H1-1b
	C18 at 66.07%	0.22	OK	Eq. H1-1b
	C19 at 66.07%	0.22	OK	Eq. H1-1b
	C2 at 66.96%	0.15	OK	Eq. H1-1b
	C20 at 66.07%	0.22	OK	Eq. H1-1b
	C21 at 66.07%	0.23	OK	Eq. H1-1b
	C22 at 66.07%	0.24	OK	Eq. H1-1b
	C23 at 66.07%	0.24	OK	Eq. H1-1b
	C24 at 66.07%	0.24	OK	Eq. H1-1b
	C25 at 66.07%	0.23	OK	Eq. H1-1b
	C26 at 66.07%	0.12	OK	Sec. F1
	C27 at 66.07%	0.13	OK	Eq. H1-1b
	C28 at 66.07%	0.13	OK	Eq. H1-1b
	C29 at 66.07%	0.13	OK	Eq. H1-1b
	C3 at 33.93%	0.16	OK	Eq. H1-1b
	C30 at 66.07%	0.13	OK	Eq. H1-1b
	C31 at 66.07%	0.12	OK	Eq. H1-1b
	C32 at 66.07%	0.13	OK	Sec. F1
	C33 at 66.07%	0.13	OK	Eq. H1-1b
	C34 at 66.07%	0.13	OK	Eq. H1-1b
	C35 at 66.07%	0.13	OK	Eq. H1-1b
	C36 at 66.07%	0.13	OK	Eq. H1-1b
	C37 at 66.07%	0.13	OK	Eq. H1-1b
	C38 at 66.07%	0.08	OK	Sec. F1
	C4 at 33.93%	0.15	OK	Eq. H1-1b
	C5 at 33.93%	0.13	OK	Eq. H1-1b
	C6 at 33.93%	0.11	OK	Eq. H1-1b
	C7 at 100.00%	0.12	OK	Eq. H1-1b
	C8 at 100.00%	0.12	OK	Eq. H1-1b
	C9 at 66.96%	0.13	OK	Eq. H1-1b


APPENDIX D

ADDITIONAL CALCULATIONS

- **Check threaded rods and bolts:**

Threaded Rods: 5/8" Φ , A307, T_{all} = 6.90 kips

Bolts: 5/8" Φ , A307, T_{all} = 6.90 kips, V_{all} = 3.68 kips

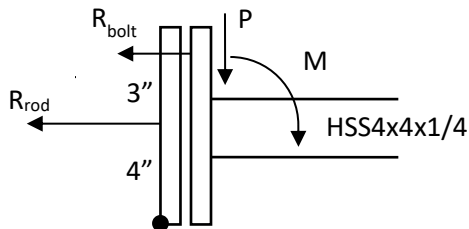

$P = 1.113$ kips

$M = 3.71$ kip-ft = 44.52 k-in.

$$R_{bolt,T} = \frac{44.52 \text{ kip} \cdot \text{in}}{7"} = 6.36 \text{ kips}$$

$R_{bolt,V} = 1.113$ kips

$$\frac{V}{V_{all}} + \frac{T}{T_{all}} = \frac{1.113 \text{ kips}}{4(3.68 \text{ kips})} + \frac{6.36 \text{ kips}}{2(6.90 \text{ kips})} = 0.536 < 1.0$$

[OK]

$$R_{rod} = \frac{6.36 \text{ kips}(7)}{4} = 11.13 \text{ kips} / 3 \text{ rods} = 3.71 \text{ kips per rod}$$

Threaded rods are orientated 30° from center:

$$R_{rod} = \frac{3.71 \text{ kips}}{\cos(30^\circ)} = 4.28 \text{ kips per rod}$$

$$R_{rod} = 4.28 \text{ kips} + \frac{1.113 \text{ kips}/0.5}{9 \text{ rod connections}} = 4.53 \text{ kips per rod}$$

$T_{all} = 6.9 \text{ kips} > 4.53 \text{ kips}$ **[OK]**



- **Check weld around stand-off arm:**

$$F_{EXX} = 70 \text{ ksi}$$

$$\text{Weld Length}(l) = 8" \text{ (vertical sections)}$$

$$\text{Weld size}(D) = 1/4" \text{ (assumed)}$$

$$\Omega = 2.0$$

$$\text{Max. Shear Force on Arm} = 1.113 \text{ kips}$$

$$\text{Max. Moment} = 3.71 \text{ kip-ft.}$$

$$\frac{q_u}{\Omega} = \frac{0.6F_{EXX}(0.707)(1")}{2} = 14.88 \text{ kips/in per 1" weld}$$

$$V_p = \frac{P_u}{l} = \frac{1.113 \text{ kips}}{8"} = 0.139 \text{ kips/in}$$

$$I_x = \frac{8^3}{12} = 42.67 \text{ in}^3$$

$$H_e = \frac{(3.71 \text{ kip-ft})(12)(2)}{42.67 \text{ in}^3} = 2.09 \text{ kips/in}$$

$$R = \sqrt{2.09^2 + 0.139^2} = 2.09 \text{ kips/in}$$

$$D_{req} = \frac{2.09 \text{ kips/in}}{14.88 \text{ kips/in per 1" weld}} = 0.14 \text{ in} < \frac{1}{4} \text{ in}$$

[OK]



RADIO FREQUENCY EMISSIONS ANALYSIS REPORT EVALUATION OF HUMAN EXPOSURE POTENTIAL TO NON-IONIZING EMISSIONS

T-Mobile Existing Facility

Site ID: CT11160B

Thompson/I-395 X99_1
720 Thompson Road
Thompson, CT 06277

April 6, 2019

EBI Project Number: 6219001085

Site Compliance Summary	
Compliance Status:	COMPLIANT
Site total MPE% of FCC general population allowable limit:	5.63 %



April 6, 2019

T-Mobile USA
Attn: Jason Overbey, RF Manager
35 Griffin Road South
Bloomfield, CT 06002

Emissions Analysis for Site: **CT11160B – Thompson/I-395 X99_1**

EBI Consulting was directed to analyze the proposed T-Mobile facility located at **720 Thompson Road, Thompson, CT**, for the purpose of determining whether the emissions from the Proposed T-Mobile Antenna Installation located on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01 and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The number of $\mu\text{W}/\text{cm}^2$ calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits, therefore it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) – (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

General population/uncontrolled exposure limits apply to situations in which the general population may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general population would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Public exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The general population exposure limits for the 600 MHz and 700 MHz frequency bands are approximately $400 \mu\text{W}/\text{cm}^2$ and $467 \mu\text{W}/\text{cm}^2$ respectively. The general population exposure limit for the 1900 MHz (PCS) and 2100 MHz (AWS) frequency bands is $1000 \mu\text{W}/\text{cm}^2$. Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.



Occupational/controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

CALCULATIONS

Calculations were done for the proposed T-Mobile Wireless antenna facility located at **720 Thompson Road, Thompson, CT**, using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. Since T-Mobile is proposing highly focused directional panel antennas, which project most of the emitted energy out toward the horizon, all calculations were performed assuming a lobe representing the maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB for directional panel antennas, was focused at the base of the tower. For this report the sample point is the top of a 6-foot person standing at the base of the tower.

For all calculations, all equipment was calculated using the following assumptions:

- 1) 1 GSM channels (PCS Band - 1900 MHz) was considered for each sector of the proposed installation. These Channels have a transmit power of 15 Watts per Channel.
- 2) 1 UMTS channel (AWS Band – 2100 MHz) was considered for each sector of the proposed installation. These Channels have a transmit power of 40 Watts per Channel.
- 3) 2 LTE channels (PCS Band - 1900 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 40 Watts per Channel.
- 4) 2 LTE channels (AWS Band – 2100 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 60 Watts per Channel.
- 5) 2 LTE channels (600 MHz Band) were considered for each sector of the proposed installation. These Channels have a transmit power of 40 Watts per Channel.
- 6) 2 LTE channels (700 MHz Band) were considered for each sector of the proposed installation. These Channels have a transmit power of 20 Watts per Channel.



- 7) Cable losses were factored in the calculations for this site. Since the proposed 1900 MHz GSM and 2100 MHz LTE & UMTS radios are ground mounted the following cable loss values were used. For each ground mounted 1900 MHz (PCS) GSM channel there was 1.79 dB of cable loss calculated into the system gains / losses for this site. For each ground mounted 2100 MHz (AWS) UMTS and LTE channel there was 1.90 dB of cable loss calculated into the system gains / losses for this site. These values were calculated based upon the manufacturers specifications for 147 feet of 1-1/4" coax
- 8) All radios at the proposed installation were considered to be running at full power and were uncombined in their RF transmissions paths per carrier prescribed configuration. Per FCC OET Bulletin No. 65 - Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. This is rarely the case, and if so, is never continuous.
- 9) For the following calculations the sample point was the top of a 6-foot person standing at the base of the tower. The maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB for directional panel antennas, was used in this direction. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 10) The antennas used in this modeling are the **RFS APX16DWV-16DWVS-E-A20** and the **RFS APXVAARR24_43-U-NA20** for 600 MHz, 700 MHz, 1900 MHz (PCS) and 2100 MHz (AWS) channels. This is based on feedback from the carrier with regard to anticipated antenna selection. All Antenna gain values and associated transmit power levels are shown in the Site Inventory and Power Data table below. The maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB for directional panel antennas, was used for all calculations. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 11) The antenna mounting height centerline of the proposed antennas is **143 feet** above ground level (AGL).
- 12) Emissions values for additional carriers were taken from the Connecticut Siting Council active database. Values in this database are provided by the individual carriers themselves.
- 13) All calculations were done with respect to uncontrolled / general population threshold limits.



T-Mobile Site Inventory and Power Data

Sector:	A	Sector:	B	Sector:	C
Antenna #:	1	Antenna #:	1	Antenna #:	1
Make / Model:	RFS APX16DWV- 16DWVS-E-A20	Make / Model:	RFS APX16DWV- 16DWVS-E-A20	Make / Model:	RFS APX16DWV- 16DWVS-E-A20
Gain:	16.3 dBd	Gain:	16.3 dBd	Gain:	16.3 dBd
Height (AGL):	143 feet	Height (AGL):	143 feet	Height (AGL):	143 feet
Frequency Bands	2100 MHz (AWS)	Frequency Bands	2100 MHz (AWS)	Frequency Bands	2100 MHz (AWS)
Channel Count	2	Channel Count	2	Channel Count	2
Total TX Power(W):	120	Total TX Power(W):	120	Total TX Power(W):	120
ERP (W):	3,305.07	ERP (W):	3,305.07	ERP (W):	3,305.07
Antenna A1 MPE%	0.63	Antenna B1 MPE%	0.63	Antenna C1 MPE%	0.63
Antenna #:	2	Antenna #:	2	Antenna #:	2
Make / Model:	RFS APXVAARR24_43- U-NA20	Make / Model:	RFS APXVAARR24_43- U-NA20	Make / Model:	RFS APXVAARR24_43- U-NA20
Gain:	12.95 / 13.35 / 15.65 / 16.35 dBd	Gain:	12.95 / 13.35 / 15.65 / 16.35 dBd	Gain:	12.95 / 13.35 / 15.65 / 16.35 dBd
Height (AGL):	143 feet	Height (AGL):	143 feet	Height (AGL):	143 feet
Frequency Bands	600 MHz / 700 MHz / 1900 MHz (PCS) / 2100MHz (AWS)	Frequency Bands	600 MHz / 700 MHz / 1900 MHz (PCS) / 2100MHz (AWS)	Frequency Bands	600 MHz / 700 MHz / 1900 MHz (PCS) / 2100MHz (AWS)
Channel Count	8	Channel Count	8	Channel Count	8
Total TX Power(W):	255	Total TX Power(W):	255	Total TX Power(W):	255
ERP (W):	6,860.56	ERP (W):	6,860.56	ERP (W):	6,860.56
Antenna A2 MPE%	1.96	Antenna B2 MPE%	1.96	Antenna C2 MPE%	1.96

Site Composite MPE%	
Carrier	MPE%
T-Mobile (Per Sector Max)	2.59 %
Nextel	0.38 %
Sprint	2.66 %
Site Total MPE %:	5.63 %

T-Mobile Sector A Total:	2.59 %
T-Mobile Sector B Total:	2.59 %
T-Mobile Sector C Total:	2.59 %
Site Total:	5.63 %



T-Mobile Maximum MPE Power Values (Per Sector)

T-Mobile _Frequency Band / Technology (Per Sector)	# Channels	Watts ERP (Per Channel)	Height (feet)	Total Power Density ($\mu\text{W}/\text{cm}^2$)	Frequency (MHz)	Allowable MPE ($\mu\text{W}/\text{cm}^2$)	Calculated % MPE
T-Mobile AWS - 2100 MHz LTE	2	1,652.54	143	6.33	AWS - 2100 MHz	1000.00	0.63%
T-Mobile PCS - 1900 MHz LTE	2	1,469.13	143	5.63	PCS - 1900 MHz	1000.00	0.56%
T-Mobile PCS - 1900 MHz GSM	1	364.83	143	0.70	PCS - 1900 MHz	1000.00	0.07%
T-Mobile AWS - 2100 MHz UMTS	1	1,114.45	143	2.13	AWS - 2100 MHz	1000.00	0.21%
T-Mobile 600 MHz LTE	2	788.97	143	3.02	600 MHz	400.00	0.76%
T-Mobile 700 MHz LTE	2	432.54	143	1.66	700 MHz	467.00	0.36%
						Total:	2.59%



Summary

All calculations performed for this analysis yielded results that were **within** the allowable limits for general population exposure to RF Emissions.

The anticipated maximum composite contributions from the T-Mobile facility as well as the site composite emissions value with regards to compliance with FCC's allowable limits for general population exposure to RF Emissions are shown here:

T-Mobile Sector	Power Density Value (%)
Sector A:	2.59 %
Sector B:	2.59 %
Sector C:	2.59 %
T-Mobile Maximum MPE % (Per Sector):	2.59 %
Site Total:	5.63 %
Site Compliance Status:	COMPLIANT

The anticipated composite MPE value for this site assuming all carriers present is **5.63%** of the allowable FCC established general population limit sampled at the ground level. This is based upon values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.