



**Crown Castle**  
3530 Torington Way, Suite 300  
Charlotte, NC 28277

September 8, 2014

Melanie A. Bachman  
Connecticut Siting Council  
10 Franklin Square  
New Britain, CT 06051

**RE: Sprint PCS-Exempt Modification - Crown Site BU: 876310**  
**Sprint PCS Site ID: CT03XC008**  
**Located at: 945 East Center Street, Wallingford, CT 06492**

Dear Ms. Bachman:

This letter and exhibits are submitted on behalf of Sprint PCS (Sprint). Sprint is making modifications to certain existing sites in its Connecticut system in order to implement their 2.5GHz LTE technology. Please accept this letter and exhibits as notification, pursuant to § 16-50j-73 of the Regulations of Connecticut State Agencies (“R.C.S.A.”), of construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-72(b)(2). In compliance with R.C.S.A. § 16-50j-73, a copy of this letter is being sent to The Honorable William W. Dickinson, Jr., Mayor for Town of Wallingford, and Mr. Albert William Beaumont, Property Owner.

Sprint plans to modify the existing wireless communications facility owned by Crown Castle and located at **945 East Center Street, Wallingford, CT 06492**. Attached are a compound plan and elevation depicting the planned changes (Exhibit-1), and documentation of the structural sufficiency of the structure to accommodate the revised antenna configuration (Exhibit-2). Also included is a power density table report reflecting the modification to Sprint’s operations at the site (Exhibit-3).

The changes to the facility do not constitute a modification as defined in Connecticut General Statutes (“C.G.S.”) § 16-50i(d) because the general physical characteristics of the facility will not be significantly changed. Rather, the planned changes to the facility fall squarely within those activities explicitly provided for in the R.C.S.A. § 16-50j-72(b)(2).

1. The proposed modifications will not result in an increase in the height of the existing tower. Sprint’s additional antennas will be located at the same elevation on the existing tower.
2. There will be no proposed modifications to the ground and no extension of boundaries.
3. The proposed modifications will not increase noise levels at the facility by six decibels or more.

4. A Structural Modification Report confirming that the tower and foundation can support Sprint's proposed modifications is included as Exhibit-2.
5. The operation of the additional antennas will not increase radio frequency (RF) emissions at the facility to a level at or above the Federal Communications Commission (FCC) adopted safety standard. A cumulative General Power Density table report for Sprint's modified facility is included as Exhibit-3.

For the foregoing reasons, Sprint respectfully submits the proposed modifications to the above-reference telecommunications facility constitutes an exempt modification under R.C.S.A. § 16-50j-72(b)(2). Please send approval/rejection letter to Attn: Donna Neal.

Sincerely,



Jeff Barbadora  
Real Estate Specialist

Enclosures

Tab 1: Exhibit-1: Compound plan and elevation depicting the planned changes

Tab 2: Exhibit-2: Structural Modification Report

Tab 3: Exhibit-3: General Power Density Table Report (RF Emissions Analysis Report)

cc: The Honorable William W. Dickinson, Jr., Mayor  
Town of Wallingford  
45 South Main Street, Room 310  
Wallingford, CT 06492

Mr. Albert William Beaumont  
945 East Center Street  
Wallingford, CT 06492

# Sprint

## 2.5 EQUIPMENT DEPLOYMENT

**Sprint**  
 2.5 EQUIPMENT DEPLOYMENT  
 6580 SPRINT PARKWAY  
 OVERLAND PARK, KANSAS 66251



**TECTONIC**  
 • PLANNING  
 • ENGINEERING  
 • SURVEYING  
 • CONSTRUCTION MANAGEMENT

**TECTONIC** Engineering & Surveying Consultants P.C.  
 1279 Route 300  
 Newburgh, NY 12550  
 Phone: (845) 567-6656  
 Fax: (845) 567-8703  
 www.tectonicengineering.com

SITE NUMBER:  
**CT03XC008**

SITE NAME:  
**BEAUMONT FARM**

SITE ADDRESS:  
**945 EAST CENTER ST.  
 WALLINGFORD, CT 06492**

CROWN ID#: **876310**  
 CROWN SITE NAME: **BEAUMONT FARM**

### SHEET INFORMATION

<b>SITE NUMBER:</b>	CT03XC008	<b>LANDLORD:</b>	CROWN CASTLE USA 2000 CORPORATE DRIVE CANONSBURG, PA
<b>SITE NAME:</b>	BEAUMONT FARM	<b>LOCAL POWER COMPANY:</b>	CONNECTICUT LIGHT AND POWER CONTACT CUSTOMER SERVICE (800) 286-2000
<b>SITE ADDRESS:</b>	945 EAST CENTER ST. WALLINGFORD, CT 06492	<b>APPLICANT:</b>	SPRINT 6580 SPRINT PARKWAY OVERLAND PARK, KANSAS 66251
<b>COUNTY:</b>	NEW HAVEN	<b>ENGINEER:</b>	JAMES QUICKSELL (845) 567-6656 EXT. 2835 JQuicksell@tectonicengineering.com
<b>COORDINATES:</b> (NAD 83)	41° 26' 37.36"N 72° 47' 46.56"W	<b>SPRINT CM:</b>	GARY WOOD (860) 940-9168 gary.wood@sprint.com
<b>GROUND ELEV:</b>	237'± AMSL	<b>CROWN CM:</b>	JASON D'AMICO (860) 209-0104 jason.d'amico@crowncastle.com
<b>STRUCTURE TYPE:</b>	MONOPOLE	<b>AAV:</b>	AT&T
<b>STRUCTURE HEIGHT:</b>	148'-0"± AGL		
<b>STRUCTURE RAD CENTER:</b>	130'-0"± AGL		
<b>ZONING CLASSIFICATION:</b>	R-18 (RESIDENT DISTRICT)		
<b>PARCEL ID:</b>	151-98		

### VICINITY MAP (NOT TO SCALE)



### SHEET INDEX

SHT. NO.	SHEET DESCRIPTION
T-1	TITLE SHEET
SP-1	GENERAL NOTES
SP-2	GENERAL NOTES
A-1	SITE PLAN
A-2	ELEVATION
A-3	ENLARGED EQUIPMENT LAYOUT PLANS
A-4	ANTENNA LAYOUT PLANS
A-5	RAN WIRING DIAGRAM
A-6	CABLE DETAILS
S-1	EQUIPMENT DETAILS
S-2	EQUIPMENT SCHEMATIC DETAILS
E-1	ELECTRICAL & GROUNDING PLANS
E-2	GROUNDING DETAILS & NOTES

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF SPRINT COMMUNICATIONS, INC. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

### SUBMITTALS

PROJECT NO: 7225.CT03XC008

NO	DATE	DESCRIPTION	BY
0	6/18/14	FOR COMMENT	DC
1	8/7/14	PER COMMENTS	MP
2	9/5/14	FOR CONSTRUCTION	MP

DATE	REVIEWED BY
9/5/14	JMG

### GENERAL NOTES

- THIS IS AN UNMANNED TELECOMMUNICATION FACILITY AND NOT FOR HUMAN HABITATION. HANDICAP ACCESS REQUIREMENTS ARE NOT REQUIRED. FACILITY HAS NO PLUMBING OR REFRIGERANTS. THIS FACILITY SHALL MEET OR EXCEED ALL FAA AND FCC REGULATOR REQUIREMENTS.
- CONTRACTOR SHALL VERIFY ALL PLANS AND EXISTING DIMENSIONS AND CONDITIONS ON THE JOB SITE AND SHALL IMMEDIATELY NOTIFY THE PROJECT OWNER'S REPRESENTATIVE IN WRITING OF DISCREPANCIES BEFORE PROCEEDING WITH THE WORK OR BE RESPONSIBLE FOR SAME.
- DEVELOPMENT AND USE OF THIS SITE WILL CONFORM TO ALL APPLICABLE CODES AND ORDINANCES.
  - 2005 STATE OF CONNECTICUT BUILDING CODE.
  - ANSI/TIA/EIA-222-F-1996.
  - NATIONAL ELECTRICAL CODE, LATEST EDITION.

### AERIAL VIEW (NOT TO SCALE)



### APPROVALS


THE FOLLOWING PARTIES HEREBY APPROVE AND ACCEPT THESE DOCUMENTS AND AUTHORIZE THE CONTRACTOR TO PROCEED WITH THE CONSTRUCTION DESCRIBED HEREIN. ALL DOCUMENTS ARE SUBJECT TO REVIEW BY THE LOCAL BUILDING DEPARTMENT AND MAY IMPOSE CHANGES OR MODIFICATIONS.

CONSTRUCTION: \_\_\_\_\_ DATE: \_\_\_\_\_

LEASING/SITE ACQUISITION: \_\_\_\_\_ DATE: \_\_\_\_\_

LANDLORD/PROPERTY OWNER: \_\_\_\_\_ DATE: \_\_\_\_\_

R.F. ENGINEER: \_\_\_\_\_ DATE: \_\_\_\_\_



### PROJECT DESCRIPTION

- (1) NEW 2.5 EQUIPMENT RACK INSIDE EXIST MMBS CABINET.
- (3) NEW RFS APXVTM14-C-120 ANTENNAS.
- (3) NEW TD-RRH8x20-25 RRH.
- (1) NEW 5/8" FIBER CABLE.

SITE NUMBER:  
**CT03XC008**

SITE NAME:  
**BEAUMONT FARM**

SITE ADDRESS:  
**945 EAST CENTER ST.  
 WALLINGFORD, CT 06492**

SHEET TITLE:  
**TITLE SHEET**

SHEET NO:  
**T-1**



**DIVISION 01000—GENERAL NOTES**

1. THE CONTRACTOR SHALL GIVE ALL NOTICES AND COMPLY WITH ALL LAWS, ORDINANCES, RULES, REGULATIONS AND LAWFUL ORDERS OF ANY PUBLIC AUTHORITY, MUNICIPAL AND UTILITY COMPANY SPECIFICATIONS, AND LOCAL AND STATE JURISDICTIONAL CODES BEARING ON THE PERFORMANCE OF THE WORK. THE WORK PERFORMED ON THE PROJECT AND THE MATERIALS INSTALLED SHALL BE IN STRICT ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS, AND ORDINANCES.
2. THE ARCHITECT/ENGINEER HAVE MADE EVERY EFFORT TO SET FORTH IN THE CONSTRUCTION AND CONTRACT DOCUMENTS THE COMPLETE SCOPE OF WORK. THE CONTRACTOR BIDDING THE JOB IS NEVERTHELESS CAUTIONED THAT MINOR OMISSIONS OR ERRORS IN THE DRAWINGS AND OR SPECIFICATIONS SHALL NOT EXCUSE SAID CONTRACTOR FROM COMPLETING THE PROJECT AND IMPROVEMENTS IN ACCORDANCE WITH THE INTENT OF THESE DOCUMENTS.
3. THE CONTRACTOR OR BIDDER SHALL BEAR THE RESPONSIBILITY OF NOTIFYING (IN WRITING) THE PROJECT OWNER'S REPRESENTATIVE OF ANY CONFLICTS, ERRORS, OR OMISSIONS PRIOR TO THE SUBMISSION OF CONTRACTOR'S PROPOSAL OR PERFORMANCE OF WORK.
4. THE SCOPE OF WORK SHALL INCLUDE FURNISHING ALL MATERIALS, EQUIPMENT, LABOR AND ALL OTHER MATERIALS AND LABOR DEEMED NECESSARY TO COMPLETE THE WORK/PROJECT AS DESCRIBED HEREIN.
5. THE CONTRACTOR SHALL VISIT THE JOB SITE PRIOR TO THE SUBMISSION OF BIDS OR PERFORMING WORK TO FAMILIARIZE HIMSELF WITH THE FIELD CONDITIONS AND TO VERIFY THAT THE PROJECT CAN BE CONSTRUCTED IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
6. ONCE THE CONTRACTOR HAS RECEIVED AND ACCEPTED THE NOTICE TO PROCEED, CONTRACTOR WILL CONTACT THE CROWN CASTLE CONSTRUCTION MANAGER OF RECORD (NOTED ON THE FIRST PAGE ON THIS CONSTRUCTION DRAWING) A MINIMUM OF 48 HOURS PRIOR TO WORK START. UPON ARRIVAL TO THE JOB SITE, CONTRACTOR CREW IS REQUIRED TO CALL 1-800-788-7011 TO NOTIFY THE CROWN CASTLE NOC WORK HAS BEGUN.
7. THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT AND MATERIALS ACCORDING TO THE MANUFACTURER'S/VENDOR'S SPECIFICATIONS UNLESS NOTED OTHERWISE OR WHERE LOCAL CODES OR ORDINANCES TAKE PRECEDENCE.
8. THE CONTRACTOR SHALL PROVIDE A FULL SET OF CONSTRUCTION DOCUMENTS AT THE SITE UPDATED WITH THE LATEST REVISIONS AND ADDENDUMS OR CLARIFICATIONS AVAILABLE FOR THE USE BY ALL PERSONNEL INVOLVED WITH THE PROJECT.
9. THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE PROJECT DESCRIBED HEREIN. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ALL CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES AND PROCEDURES AND FOR COORDINATING ALL PORTIONS OF THE WORK UNDER THE CONTRACT.
10. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL PERMITS AND INSPECTIONS WHICH MAY BE REQUIRED FOR THE WORK BY THE ARCHITECT/ENGINEER, THE STATE, COUNTY OR LOCAL GOVERNMENT AUTHORITY.
11. THE CONTRACTOR SHALL MAKE NECESSARY PROVISIONS TO PROTECT EXISTING IMPROVEMENTS, EASEMENTS, PAVING, CURBING, ETC. DURING CONSTRUCTION. UPON COMPLETION OF WORK, THE CONTRACTOR SHALL REPAIR ANY DAMAGE THAT MAY HAVE OCCURRED DUE TO CONSTRUCTION ON OR ABOUT THE PROPERTY.
12. THE CONTRACTOR SHALL KEEP THE GENERAL WORK AREA CLEAN AND HAZARD FREE DURING CONSTRUCTION AND DISPOSE OF ALL DIRT, DEBRIS, RUBBISH AND REMOVE EQUIPMENT NOT SPECIFIED AS REMAINING ON THE PROPERTY. PREMISES SHALL BE LEFT IN CLEAN CONDITION AND FREE FROM PAINT SPOTS, DUST, OR SMUDGES OF ANY NATURE.
13. THE CONTRACTOR SHALL COMPLY WITH ALL PERTINENT SECTIONS OF THE BASIC STATE BUILDING CODE, LATEST EDITION, AND ALL OSHA REQUIREMENTS AS THEY APPLY TO THIS PROJECT. ALL EXISTING ACTIVE SEWER, WATER, GAS, ELECTRIC, AND OTHER UTILITIES WHERE ENCOUNTERED IN THE WORK SHALL BE PROTECTED AT ALL TIMES, AND WHERE REQUIRED FOR THE PROPER EXECUTION OF THE WORK SHALL BE RELOCATED AS DIRECTED BY THE ARCHITECT/ENGINEER. EXTREME CAUTION SHOULD BE USED BY THE CONTRACTOR WHEN EXCAVATING OR PIER DRILLING AROUND OR NEAR UTILITIES. THE CONTRACTOR SHALL PROVIDE SAFETY TRAINING FOR THE WORKING CREW. THIS WILL INCLUDE BUT NOT LIMITED TO A) FALL PROTECTION, B) CONFINED SPACE, C) ELECTRICAL SAFETY, D) TRENCHING AND EXCAVATION OF ALL EXISTING INACTIVE SEWER, WATER, GAS, ELECTRIC AND OTHER UTILITIES WHICH INTERFERE WITH THE EXECUTION OF THE WORK SHALL BE REMOVED AND OR CAPPED, PLUGGED OR OTHERWISE DISCONTINUED AT THE POINTS WHICH WILL NOT INTERFERE WITH THE EXECUTION OF THE WORK SUBJECT TO THE APPROVAL OF THE ARCHITECT/ENGINEER.
14. THE CONTRACTOR SHALL NOTIFY THE PROJECT OWNER'S REPRESENTATIVE IN WRITING WHERE A CONFLICT OCCURS ON ANY OF THE CONTRACT DOCUMENTS. THE CONTRACTOR IS NOT TO ORDER MATERIAL OR CONSTRUCT ANY PORTION OF THE WORK THAT IS IN CONFLICT UNTIL CONFLICT IS RESOLVED BY THE LESSEE/LICENSEE REPRESENTATIVE.
15. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, ELEVATIONS, PROPERTY LINES, ETC. ON THE JOB.
16. THE CONTRACTOR SHALL NOTIFY THE THE RF ENGINEER FOR ANTENNA AZIMUTH VERIFICATION (DURING ANTENNA INSTALLATION) PRIOR TO CONDUCTING SWEEP TESTS.
17. THE CONTRACTOR SHALL SUBMIT AT THE END OF THE PROJECT A COMPLETE SET OF AS-BUILT DRAWINGS TO THE CLIENT REPRESENTATIVE.
18. REFER TO: CONSTRUCTION STANDARDS—SPRINT DOCUMENT EXHIBIT A—STANDARD CONSTRUCTION SPECIFICATIONS FOR WIRELESS SITES REV. 4.0— 02.15.2011.DOCM.
19. REFER TO: WEATHER PROOFING SPECS: EXCERPT EXH A—WHRPRF—STD CONSTR SPECS\_157201110421855492.DOCM.
20. REFER TO: COLOR CODING—SPRINT NEXTEL ANT AND LINE COLOR CODING (DRAFT) V3 09-08-11.PDF
21. REFER TO LATEST DOCUMENTATION REVISION.

**DIVISION 03000—CONCRETE**

- 1.03 APPLICABLE STANDARDS (USE LATEST EDITIONS)
- A. ACI-301 – SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS.
  - B. ACI-347 GUIDE TO FORM WORK FOR CONCRETE.
  - C. ASTM C33– CONCRETE AGGREGATE
  - D. ASTM C94 – READY MIXED CONCRETE e. ASTM C150 – PORTLAND CEMENT.
  - E. ASTM C260 – AIR-ENTRAINING ADMIXTURES FOR CONCRETE
  - F. ASTM C309– LIQUID MEMBRANE FORMING COMPOUNDS FOR CURING CONCRETE.
  - G. ASTM C494 – CHEMICAL ADMIXTURES FOR CONCRETE
  - H. ASTM A615– DEFORMED AND PLAIN BILLET–STEEL BARS FOR CONCRETE REINFORCEMENT
  - J. ASTM A185– STEEL WELDED WIRE FABRIC (PLAIN) FOR CONCRETE REINFORCEMENT
- 1.04 QUALITY ASSURANCE
- CONCRETE MATERIALS AND OPERATIONS SHALL BE TESTED AND INSPECTED BY THE ARCHITECT/ENGINEER AS DIRECTED BY THE CLIENT'S REPRESENTATIVE.
- 3.04 SURFACE FINISHES
- A. SURFACES AGAINST WHICH BACKFILL OR CONCRETE SHALL BE PLACED REQUIRE NO TREATMENT EXCEPT REPAIR OF DEFECTIVE AREAS.
  - B. SURFACES THAT WILL BE PERMANENTLY EXPOSED SHALL PRESENT A UNIFORM FINISH PROVIDED BY THE REMOVAL OF FINES AND THE FILLING HOLES AND OTHER IRREGULARITIES WITH DRY PACK GROUT, OR BY SACKING WITH UTILITY OR ORDINARY GROUT.
  - C. SURFACES THAT WOULD NORMALLY BE LEVEL AND WHICH WILL BE PERMANENTLY EXPOSED TO THE WEATHER SHALL BE SLOPED FOR DRAINAGE. UNLESS ENGINEER'S DESIGN DRAWING SPECIFIES A HORIZONTAL SURFACE OR SURFACES SUCH AS STAIR TREADS, WALLS, CURBS, AND PARAPETS SHALL BE SLOPED APPROXIMATELY 1/4" PER FOOT.
  - D. SURFACES THAT WILL BE COVERED BY BACKFILL OR CONCRETE SHALL BE SMOOTH SCREENED.
  - E. EXPOSED SLAB SURFACES SHALL BE CONSOLIDATED, SCREENED, FLOATED, AND STEEL TROWELED. HAND OR POWER-DRIVEN EQUIPMENT MAY BE USED FOR FLOATING. FLOATING SHALL BE STARTED AS SOON AS THE SCREENED SURFACE HAS ATTAINED A STIFFNESS TO PERMIT FINISHING OPERATIONS. OPERATIONS. ALL EDGES MUST HAVE A 3/4" CHAMFER.
- 1.04 QUALITY ASSURANCE CONCRETE MATERIALS AND OPERATIONS SHALL BE TESTED AND INSPECTED BY THE ENGINEER.
- 3.05 PATCHING
- THE CONTRACTOR SHALL NOTIFY THE ENGINEER IMMEDIATELY UPON REMOVAL OF THE FORMS TO OBSERVE CONCRETE SURFACE CONDITIONS. IMPERFECTIONS SHALL BE PATCHED ACCORDING TO THE ENGINEER'S DIRECTION.
- 3.06 DEFECTIVE CONCRETE
- THE CONTRACTOR SHALL NOTIFY OR REPLACE CONCRETE NOT CONFORMING TO REQUIRED LEVELS AND LINES, DETAILS, AND ELEVATIONS AS SPECIFIED IN ACI 301.
- 3.07 PROTECTION
- A. IMMEDIATELY AFTER PLACEMENT. THE CONTRACTOR SHALL PROTECT THE CONCRETE FROM PREMATURE DRYING, EXCESSIVELY HOT OR COLD TEMPERATURES, AND MECHANICAL INJURY. FINISHED WORK SHALL BE PROTECTED.
  - B. CONCRETE SHALL BE MAINTAINED WITH MINIMAL MOISTURE LOSS AT RELATIVELY CONSTANT TEMPERATURE FOR PERIOD NECESSARY FOR HYDRATION OF CEMENT AND HARDENING OF CONCRETE.
  - C. ALL CONCRETE SHALL BE WATER CURED PER ACCEPTABLE PRACTICES SPECIFIED BY ACI CODE (LATEST EDITION)

**DIVISION 05000 – METALS**

- PART 1 – GENERAL
- 1.01 WORK INCLUDED
- A. THE WORK CONSISTS OF THE FABRICATION AND INSTALLATION OF ALL MATERIALS TO BE FURNISHED. AND WITHOUT LIMITING THE GENERALITY THEREOF, INCLUDING ALL EQUIPMENT, LABOR AND SERVICES REQUIRED FOR ALL STRUCTURAL STEEL WORK AND ALL ITEMS INCIDENTAL AS SPECIFIED AND AS SHOWN ON THE DRAWINGS:
1. STEEL FRAMING INCLUDING BEAMS, ANGLES, CHANNELS AND PLATES. WELDING AND BOLTING OF ATTACHMENTS.
- 1.02 REFERENCE STANDARDS
- A. THE WORK SHALL CONFORM TO THE CODES AND STANDARDS OF THE FOLLOWING AGENCIES AS FURTHER CITED HEREIN:
1. ASTM: AMERICAN SOCIETY FOR TESTING AND MATERIALS AS PUBLISHED IN "COMPILATION OF ASTM STANDARDS IN BUILDING CODES" OR LATEST EDITION.
  2. AWS: AMERICAN WELDING SOCIETY CODE OR LATEST EDITION.
  3. AISC: AMERICAN INSTITUTE OF STEEL CONSTRUCTION, "SPECIFICATION FOR THE DESIGN, FABRICATION AND ERECTION OF STRUCTURAL STEEL FOR BUILDINGS" (LATEST EDITION).
- PART 2 – PRODUCTS
- 2.01 MATERIALS
- A. STRUCTURAL STEEL: SHALL COMPLY WITH THE REQUIREMENTS OF ASTM A36 AND A992 FOR STRUCTURAL STEEL.
- ALL PROPOSED STRUCTURAL STEEL SHALL BE FABRICATED AND ERECTED IN ACCORDANCE WITH AISC CODE AND ASTM SPECIFICATIONS (LATEST EDITION) ALL NEW STEEL SHALL CONFORM TO THE FOLLOWING.
1. STRUCTURAL WIDE FLANGE: ASTM A992 Fy=50KSI.
  2. MISCELLANEOUS STEEL (PLATES), CHANNELS, ANGLES, ETC): ASTM A36 (Fy=36KSI).
  3. STRUCTURAL TUBING: ASTM A500 Gr. B (Fy=46KSI).
  4. STEEL PIPE: ASTM A53 Gr B (Fy=35KSI).
- 2.02 WELDING
- A. ALL WELDING SHALL BE DONE BY CERTIFIED WELDERS. CERTIFICATION DOCUMENTS SHALL BE MADE AVAILABLE FOR ENGINEER'S AND/OR OWNER'S REVIEW IF REQUESTED.
  - B. WELDING ELECTRODES FOR MANUAL SHIELDED METAL ARC WELDING SHALL CONFORM TO ASTM 1-233, E70 SERIES. BARE ELECTRODES AND GRANULAR FLUX USED IN THE SUBMERGED ARC PROCESS SHALL CONFORM TO AISC SPECIFICATIONS.
  - C. FIELD WELDING SHALL BE DONE AS PER AWS D1.1 REQUIREMENTS VISUAL INSPECTION IS ACCEPTABLE.
  - D. STUD WELDING SHALL BE ACCOMPLISHED BY CAPACITOR DISCHARGE (CD) WELDING TECHNIQUE USING CAPACITOR DISCHARGE STUD WELDER.
  - E. PROVIDE STUD FASTENERS OF MATERIALS AND SIZES SHOWN ON DRAWINGS OR AS RECOMMENDED BY THE MANUFACTURER FOR STRUCTURAL LOADINGS REQUIRED.
  - F. FOLLOW MANUFACTURERS SPECIFICATIONS AND INSTRUCTIONS TO PROPERLY SELECT AND INSTALL STUD WELDS.
- 2.03 BOLTING
- A. BOLTS SHALL BE CONFORMING TO ASTM A35 HIGH STRENGTH HOT DIP GALVANIZED WITH ASTM A153 HEAVY HEX TYPE NUTS.
  - B. BOLTS SHALL BE 3/4" (MINIMUM) CONFORMING TO ASTM A325, HOT DIP GALVANIZED, ASTM A153 NUTS SHALL BE HEAVY HEX TYPE.
  - C. ALL CONNECTIONS SHALL BE 2 BOLTS MINIMUM.
  - D. EXCEPT WHERE SHOWN, ALL BEAM TO BEAM AND BEAM TO COLUMN CONNECTIONS TO BE DOUBLE ANGLED CONNECTIONS WITH HIGH STRENGTH BOLTS (THREADS EXCLUDED FROM SHEAR PLANE) AND HARDENED WASHERS.
  - E. STANDARD, OVERSIZED OR HORIZONTAL SHORT SLOTTED HOLES.
  - F. SNUG-TIGHT STRENGTH BEARING BOLTS MAY BE USED IN STANDARD HOLES CONFORMING TO ACIS, USING THE TURN OF THE NUT METHOD.
  - H. FULLY-TENSIONED HIGH STRENGTH (SLIP CRITICAL) SHALL BE USED IN OVERSIZED SLOT HOLES (RESPECTIVE OF SLOT ORIENTATION).
  - I. ALL BRACED CONNECTION, MOMENT CONNECTION AND CONNECTIONS NOTED AS "SLIP CRITICAL" SHALL BE BE SLIP CRITICAL JOINTS WITH CLASS A SURFACE CONDITIONS, UNLESS OTHERWISE NOTED.
  - J. EPOXY ANCHOR ASSEMBLIES SHALL BE AS MANUFACTURED BY HILTI OR ENGINEER APPROVED EQUAL, AS FOLLOWS:
- |                               |                      |
|-------------------------------|----------------------|
| <b>BASE MATERIAL</b>          | <b>ANCHOR SYSTEM</b> |
| CONCRETE                      | HILTI HIT-HY 200     |
| HOLLOW & GROUTED CMU OR BRICK | HILTI HIT-HY 70      |
- 2.04 FABRICATION
- A. FABRICATION OF STEEL SHALL CONFORM TO THE AISC AND AWS

**2.05 FINISH**

- A. STRUCTURAL STEEL EXPOSED TO WEATHER SHALL BE HOT-DIP GALVANIZED AFTER FABRICATION IN ACCORDANCE WITH ASTM A123. (LATEST EDITION) UNLESS OTHERWISE NOTED.
- 2.06 PROTECTION
- A. UPON COMPLETION OF ERECTION, INSPECT ALL GALVANIZED STEEL AND PAINT ANY FIELD CUTS, WELDS OR GALVANIZED BREAKS WITH (2) COATS OF ZINC-RICH COLD GALVANIZING PAINT.

**PART 3 – ERECTION**

- A. PROVIDE ALL ERECTION, EQUIPMENT, BRACING, PLANKING, FIELD BOLTS, NUTS, WASHERS, DRIFT PINS, AND SIMILAR MATERIALS WHICH DO NOT FORM A PART OF THE COMPLETED CONSTRUCTION, BUT ARE NECESSARY FOR ITS PROPER ERECTION.
- B. ERECT AND ANCHOR ALL STRUCTURAL STEEL IN ACCORDANCE WITH AISC REFERENCE STANDARDS. ALL WORK SHALL BE ACCURATELY SET TO ESTABLISHED SUITABLE ATTACHMENTS TO THE CONSTRUCTION OF THE BUILDING
- C. TEMPORARY BRACING, GUYING, AND SUPPORT SHALL BE PROVIDED TO KEEP THE STRUCTURE SET AND ALIGNED AT ALL TIMES DURING CONSTRUCTION, AND TO PREVENT DANGER TO PERSONS AND PROPERTY. CHECK ALL TEMPORARY LOADS AND STAY WITHIN SAFE CAPACITY OF ALL BUILDING COMPONENTS.

2.5 EQUIPMENT DEPLOYMENT  
6580 SPRINT PARKWAY  
OVERLAND PARK, KANSAS 66251

**Tectonic** Engineering & Surveying Consultants P.C.

1279 Route 300  
Newburgh, NY 12550  
Phone: (845) 567-6656  
Fax: (845) 567-8703  
www.tectonicengineering.com

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF SPRINT COMMUNICATIONS, INC. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

**SUBMITTALS**

PROJECT NO: 7225.CT03XC008

NO	DATE	DESCRIPTION	BY
0	6/18/14	FOR COMMENT	DC
1	8/7/14	PER COMMENTS	MP
2	9/5/14	FOR CONSTRUCTION	MP

DATE	REVIEWED BY
9/5/14	JMA

SITE NUMBER:  
CT03XC008

SITE NAME:  
BEAUMONT FARM

SITE ADDRESS:  
945 EAST CENTER ST.  
WALLINGFORD, CT 06492

SHEET TITLE:  
GENERAL NOTES

SHEET NO:  
SP-1

DIVISION 13000—SPECIAL CONSTRUCTION ANTENNA INSTALLATION

PART 1 - GENERAL

1.01 WORK INCLUDED

A. ANTENNAS AND HYBRIFLEX CABLES ARE FURNISHED BY CLIENT'S REPRESENTATIVE UNDER SEPARATE CONTRACT. THE CONTRACTOR SHALL ASSIST ANTENNA INSTALLATION CONTRACTOR IN TERMS OF COORDINATION AND SITE ACCESS. ERECTION SUBCONTRACTOR SHALL BE RESPONSIBLE FOR THE PROPERTY.

B. INSTALL ANTENNAS AS INDICATED ON DRAWINGS AND CLIENT'S REPRESENTATIVE SPECIFICATIONS.

C. INSTALL GALVANIZED STEEL ANTENNA MOUNTS AS INDICATED ON DRAWINGS.

D. INSTALL FURNISHED GALVANIZED STEEL OR ALUMINUM WAVEGUIDE AND PROVIDE PRINTOUT OF THAT RESULT

F. INSTALL HYBRIFLEX CABLES AND TERMINATIONS BETWEEN ANTENNAS AND EQUIPMENT PER MANUFACTURER'S RECOMMENDATIONS. WEATHERPROOF ALL CONNECTORS BETWEEN THE ANTENNA AND EQUIPMENT PER MANUFACTURER'S REQUIREMENTS.

G. ANTENNA AND HYBRIFLEX CABLE GROUNDING:

1. ALL EXTERIOR #6 GREEN GROUND WIRE DAISY CHAIN CONNECTIONS ARE TO BE WEATHER SEALED WITH ANDREWS CONNECTOR/SPICE WEATHERPROOFING KIT TYPE 3221213 OR EQUIVALENT.

2. ALL HYBRIFLEX CABLE GROUNDING KITS ARE TO BE INSTALLED ON STRAIGHT RUNS OF HYBRIFLEX CABLE (NOT WITHIN BENDS). 1.02 RELATED WORK FURNISH THE FOLLOWING WORK AS SPECIFIED UNDER CONSTRUCTION DOCUMENTS, BUT COORDINATE WITH OTHER TRADES PRIOR TO BID:

1. FLASHING OF OPENING INTO OUTSIDE WALLS.
2. SEALING AND CAULKING ALL OPENINGS.
3. PAINTING.
4. CUTTING AND PATCHING.

1.03 REQUIREMENTS OF REGULATOR AGENCIES

A. FURNISH U.L. LISTED EQUIPMENT WHERE SUCH LABEL IS AVAILABLE. INSTALL IN CONFORMANCE WITH U.L. STANDARDS WHERE APPLICABLE.

B. INSTALL ANTENNA, ANTENNA CABLES, GROUNDING SYSTEM IN ACCORDANCE WITH DRAWINGS AND SPECIFICATIONS IN EFFECT AT PROJECT LOCATION AND RECOMMENDATIONS OF STATE AND LOCAL BUILDING CODES HAVING JURISDICTION OVER SPECIFIC PORTIONS OF WORK. THIS WORK INCLUDES, BUT IS NOT LIMITED TO THE FOLLOWING:

1. EIA - ELECTRONIC INDUSTRIES ASSOCIATION RS-22. STRUCTURAL STANDARDS FOR STEEL ANTENNA TOWERS AND ANTENNA SUPPORTING STRUCTURES.

2. FAA - FEDERAL AVIATION ADMINISTRATION ADVISORY CIRCULAR AC 70/7480-IH, CONSTRUCTION MARKING AND LIGHTING.

3. FCC - FEDERAL COMMUNICATION COMMISSION RULES AND REGULATIONS FORM 715, OBSTRUCTION MARKING AND LIGHTING SPECIFICATION FOR ANTENNA STRUCTURES

4. AISC - AMERICAN INSTITUTE OF STEEL CONSTRUCTION FOR STRUCTURAL JOINTS USING ASTM 1325 OR A490 BOLTS.

5. NEC - NATIONAL ELECTRIC CODE - ON TOWER LIGHTING KITS.

6. UL - UNDERWRITER'S LABORATORIES APPROVED ELECTRICAL PRODUCTS.

7. IN ALL CASES, PART 77 OF THE FAA RULES AND PARTS 17 AND 22 OF THE FCC RULES ARE APPLICABLE AND IN THE EVENT OF CONFLICT, SUPERSEDE ANY OTHER STANDARDS OR SPECIFICATIONS.

B. LIFE SAFETY CODE NFPA, LATEST EDITION.

DIVISION 13000—EARTHWORK

PART 1 GENERAL

1.01 WORK INCLUDED: REFER TO SURVEY AND SITE PLAN FOR WORK INCLUDED.

1.02 RELATED WORK

A. CONSTRUCTION OF EQUIPMENT FOUNDATIONS  
B. INSTALLATION OF ANTENNA SYSTEM

PART 2 PRODUCTS

2.01 MATERIALS

A. ROAD AND SITE MATERIALS; FILL MATERIAL SHALL BE ACCEPTABLE, SELECT FILL SHALL BE IN ACCORDANCE WITH LOCAL DEPARTMENT OF HIGHWAY AND PUBLIC TRANSPORTATION STANDARD SPECIFICATIONS.

B. SOIL STERILIZER SHALL BE EPA REGISTERED OF LIQUID COMPOSITION AND OF PRE-EMERGENCE DESIGN.

C. SOIL STABILIZER FABRIC SHALL BE MIRAFI OR EQUAL - 600X AT ACCESS ROAD AND COMPOUND.

D. GRAVEL FILL; WELL GRADED, HARD, DURABLE, NATURAL SAND AND GRAVEL, FREE FROM ICE AND SNOW, ROOTS, SOD RUBBISH, AND OTHER DELETERIOUS OR ORGANIC MATTER.

MATERIAL SHALL CONFORM TO THE FOLLOWING GRADATION REQUIREMENTS.

GRAVEL FILL TO BE PLACED IN LIFTS OF 9" MAXIMUM THICKNESS AND 90 % DENSITY. COMPACTED TO 95

E. NO FILL OR EMBANKMENT MATERIALS SHALL BE PLACED ON FROZEN GROUND. FROZEN MATERIALS SNOW OR ICE SHALL NOT BE PLACED IN ANY FILL OF EMBANKMENT

2.02 EQUIPMENT

A. COMPACTION SHALL BE ACCOMPLISHED BY MECHANICAL MEANS. LARGER AREAS SHALL BE COMPACTED BY SHEEPS FOOT, VIBRATORY OR RUBBER TIED ROLLERS WEIGHING AT LEAST FIVE TONS. SMALLER AREAS SHALL BE COMPACTED BY POWER-DRIVER, HAND HELD TAMPERS.

B. PRIOR TO OTHER EXCAVATION AND CONSTRUCTION EFFORTS GRUB ORGANIC MATERIAL TO A MINIMUM OF 6" BELOW ORIGINAL GROUND LEVEL.

C. UNLESS OTHERWISE INSTRUCTED BY CLIENT'S REPRESENTATIVE. REMOVE TREES, BRUSH AND DEBRIS FROM THE PROPERTY TO AN AUTHORIZED DISPOSAL LOCATION.

D. PRIOR TO PLACEMENT OF FILL OR BASE MATERIALS, ROLL THE SOIL.

E. WHERE UNSTABLE SOIL CONDITIONS ARE ENCOUNTERED, LINE THE GRUBBED AREAS WITH STABILIZER MAT PRIOR TO PLACEMENT OF FILL OR BASE MATERIAL.

3.03 INSTALLATION

A. THE SITE AND TURNAROUND AREAS SHALL BE AT THE SUB-BASE COURSE ELEVATION PRIOR TO FORMING FOUNDATIONS. GRADE OR FILL THE SITE AND ACCESS ROAD AS REQUIRED TO PRODUCE EVEN DISTRIBUTION OF SPOILS RESULTING FROM FOUNDATION EXCAVATIONS. THE RESULTING GRADE SHALL CORRESPOND WITH SAID SUB-BASE COURSE, ELEVATIONS ARE TO BE CALCULATED FORM FINISHED GRADES OR SLOPES INDICATED.

B. THE ACCESS ROAD SHALL BE BROUGHT TO BASE COURSE ELEVATION PRIOR TO FOUNDATION CONSTRUCTION.

C. DO NOT CREATE DEPRESSIONS WHERE WATER MAY POND.

D. THE CONTRACT INCLUDES ALL NECESSARY GRADING, BANKING, DITCHING AND COMPLETE SURFACE COURSE FOR ACCESS ROAD. ALL ROADS OR ROUTES UTILIZED FOR ACCESS TO PUBLIC THOROUGHFARE IS INCLUDED IN SCOPE OF WORK UNLESS OTHERWISE INDICATED.

E. WHEN IMPROVING AN EXISTING ACCESS ROAD, GRADE THE EXISTING ROAD TO REMOVE ANY ORGANIC MATTER AND SMOOTH THE SURFACE BEFORE PLACING FILL OR STONE.

F. PLACE FILL OR STONE IN 3" MAXIMUM LIFTS AND COMPACT BEFORE PLACING NEXT LIFT.

G. THE FINISH GRADE, INCLUDING TOP SURFACE COURSE, SHALL EXTEND A MINIMUM OF 12" BEYOND THE SITE FENCE AND SHALL COVER THE AREA AS INDICATED.

H. RIPRAP SHALL BE APPLIED TO THE SIDE SLOPES OF ALL FENCED AREAS, PARKING AREAS AND TO ALL OTHER SLOPES GREATER THAN

2:1. RIPRAP SHALL BE APPLIED TO THE SIDES OF DITCHES OR DRAINAGE SWALES AS INDICATED ON PLANS.

J. RIPRAP ENTIRE DITCH FOR 6'-0" IN ALL DIRECTIONS AT CULVERT OPENINGS.

K. SEED, FERTILIZER AND STRAW COVER SHALL BE APPLIED TO ALL OTHER DISTURBED AREAS AND DITCHES, DRAINAGE, SWALES, NOT OTHERWISE RIP-RAPPED.

L. UNDER NO CIRCUMSTANCES SHALL DITCHES, SWALES OR CULVERTS BE PLACED SO THEY DIRECT WATER TOWARDS, OR PERMIT STANDING WATER IMMEDIATELY ADJACENT TO SITE. IF OWNER DESIGNS OR IF DESIGN ELEVATIONS CONFLICT WITH THIS GUIDANCE ADVISE THE OWNER IMMEDIATELY.

M. IF A DITCH LIES WITH SLOPE GREATER THAN TEN PERCENT, MOUND DIVERSIONARY HEADWALL IN THE DITCH AT CULVERT ENTRANCES. RIP-RAP THE UPSTREAM SIDE OF THE HEADWALL AS WELL AS THE DITCH FOR 6'-0" ABOVE THE CULVERT.

N. IF A DITCH LIES WITH SLOPES GREATER THAN TEN PERCENT, MOUND DIVERSIONARY HEADWALLS IN THE DITCH FOR 6'-0" ABOVE THE CULVERT ENTRANCE.

O. SEED AND FERTILIZER SHALL BE APPLIED TO SURFACE CONDITIONS WHICH WILL ENCOURAGE ROOTING. RAKE AREAS TO BE SEEDED TO EVEN THE SURFACE AND TO LOOSEN THE SOIL.

P. SOW SEED IN TWO DIRECTIONS IN TWICE THE QUANTITY RECOMMENDED BY THE SEED PRODUCER.

Q. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE GROWTH OF SEEDED AND LANDSCAPED AREAS BY WATERING UP TO THE POINT OF RELEASE FROM THE CONTRACT. CONTINUE TO REWORK BARE AREAS UNTIL COMPLETE COVERAGE IS OBTAINED.

3.04 FIELD QUALITY CONTROL

A. COMPACTION SHALL BE D-1557 FOR SITE WORK AND 95 % MAXIMUM DENSITY UNDER SLAB AREAS. AREAS OF SETTLEMENT WILL BE EXCAVATED AND REFILLED AT CONTRACTOR'S EXPENSE. REQUIRED. USE OF EROSION CONTROL MESH OR MULCH NET SHALL BE AN ACCEPTABLE ALTERNATIVE.

B. THE COMPACTION TEST RESULTS SHALL BE AVAILABLE PRIOR TO THE CONCRETE POUR.

3.05 PROTECTION

A. PROTECT SEEDED AREAS FORM EROSION BY SPREADING STRAW TO A UNIFORM LOOSE DEPTH OF 1"-2". STAKE AND TIE DOWN AS REQUIRED. USE OF EROSION CONTROL MESH OR MULCH NET SHALL BE AN ACCEPTABLE ALTERNATIVE.

B. ALL TREES PLACED IN CONJUNCTION WITH A LANDSCAPE CONTRACT SHALL BE WRAPPED, TIED WITH HOSE PROTECTED WIRE AND SECURED TO STAKES EXTENDING 2'-0" INTO THE GROUND ON FOUR SIDES OF THE TREE.

C. ALL EXPOSED AREAS SHALL BE PROTECTED AGAINST WASHOUTS AND SOIL EROSION. STRAW BALES SHALL BE PLACED AT THE INLET APPROACH TO ALL NEW OR EXISTING CULVERTS. REFER TO DETAILS ON DRAWINGS

SYMBOLS	ABBREVIATIONS
— — — — G — — — — G —	GROUND WIRE
— — — — E — — — — E —	ELECTRIC
— — — — T — — — — T —	TELEPHONE
— — — — — — — — — — — — — —	OVERHEAD WIRE
— — — — — — — — — — — — — —	PROPERTY LINE
— X — — — — X — — — — X — — — —	CHAIN LINK FENCE
A-1	ANTENNA MARK
(E)	EXISTING
(P)	PROPOSED DETAIL
	REFERENCE
	SURFACE ELEVATION

**Sprint**  
 2.5 EQUIPMENT DEPLOYMENT  
 6580 SPRINT PARKWAY  
 OVERLAND PARK, KANSAS 66251

**CROWN CASTLE**

**TECTONIC** ENGINEERING & SURVEYING  
 CONSTRUCTION MANAGEMENT  
 TECTONIC Engineering & Surveying  
 Consultants P.C.  
 1279 Route 300  
 Newburgh, NY 12550  
 Phone: (845) 567-6656  
 Fax: (845) 567-8703  
 www.tectonicengineering.com


THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF SPRINT COMMUNICATIONS, INC. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

SUBMITTALS

PROJECT NO: 7225.CT03XC008

NO	DATE	DESCRIPTION	BY
0	6/18/14	FOR COMMENT	DC
1	8/7/14	PER COMMENTS	MP
2	9/5/14	FOR CONSTRUCTION	MP

DATE	REVIEWED BY
9/5/14	JMR





SITE NUMBER:  
 CT03XC008  
 SITE NAME:  
 BEAUMONT FARM  
 SITE ADDRESS:  
 945 EAST CENTER ST.  
 WALLINGFORD, CT 06492

SHEET TITLE:  
 GENERAL NOTES

SHEET NO:  
 SP-2

NORTH NOTE:  
 NORTH SHOWN HAS BEEN ESTABLISHED USING THE USGS QUADRANGLE 7.5 MINUTE MAPS AND IS APPROXIMATE. VERIFY TRUE NORTH PRIOR TO INSTALLATION OF ANTENNAS.

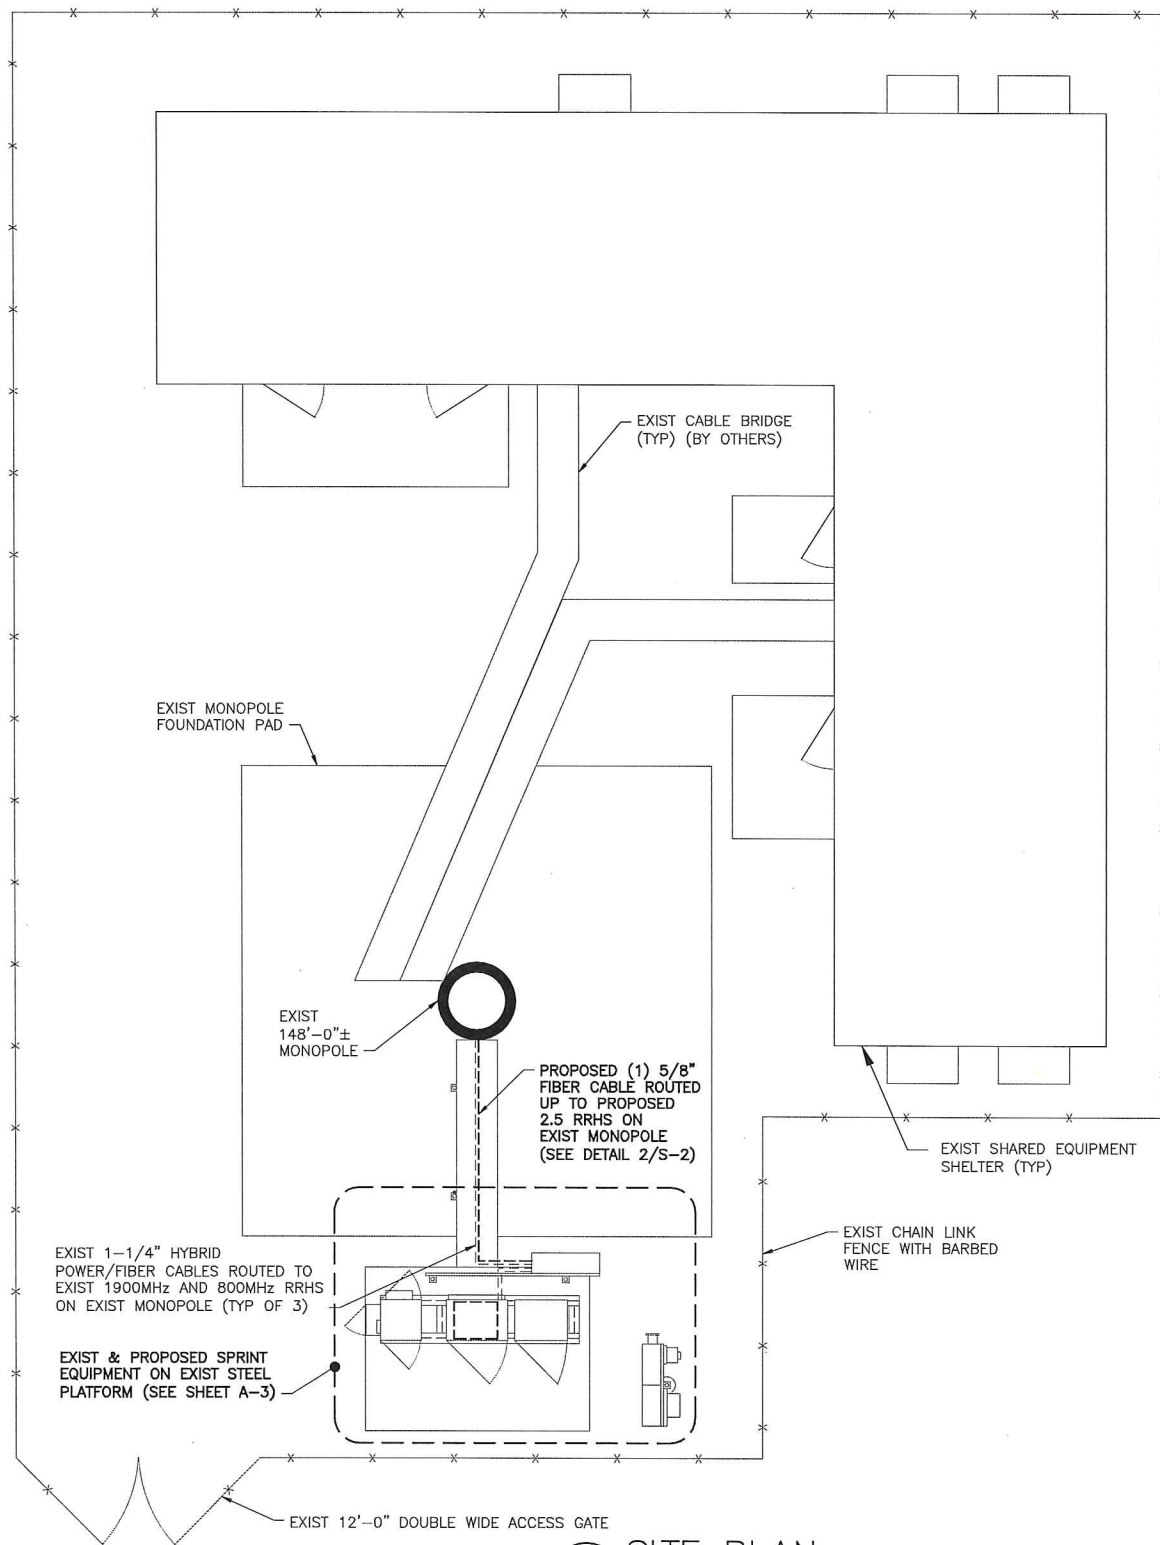

1 SITE PLAN  
 A-1 SCALE: 1/4" = 1'-0"



**Sprint**

2.5 EQUIPMENT DEPLOYMENT  
 6580 SPRINT PARKWAY  
 OVERLAND PARK, KANSAS 66251

**CROWN CASTLE**

**TECTONIC**

• PLANNING  
 • ENGINEERING  
 • SURVEYING  
 • CONSTRUCTION MANAGEMENT  
**TECTONIC** Engineering & Surveying Consultants P.C.  
 1279 Route 300  
 Newburgh, NY 12550  
 Phone: (845) 567-6656  
 Fax: (845) 567-8703  
 www.tectonicengineering.com


THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF SPRINT COMMUNICATIONS, INC. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

**SUBMITTALS**

PROJECT NO: 7225.CT03XC008

NO	DATE	DESCRIPTION	BY
0	6/18/14	FOR COMMENT	DC
1	8/7/14	PER COMMENTS	MP
2	9/5/14	FOR CONSTRUCTION	MP


DATE: 9/5/14 REVIEWED BY: JMC



SITE NUMBER:  
 CT03XC008  
 SITE NAME:  
 BEAUMONT FARM  
 SITE ADDRESS:  
 945 EAST CENTER ST.  
 WALLINGFORD, CT 06492

SHEET TITLE:  
 SITE PLAN


SHEET NO:  
 A-1

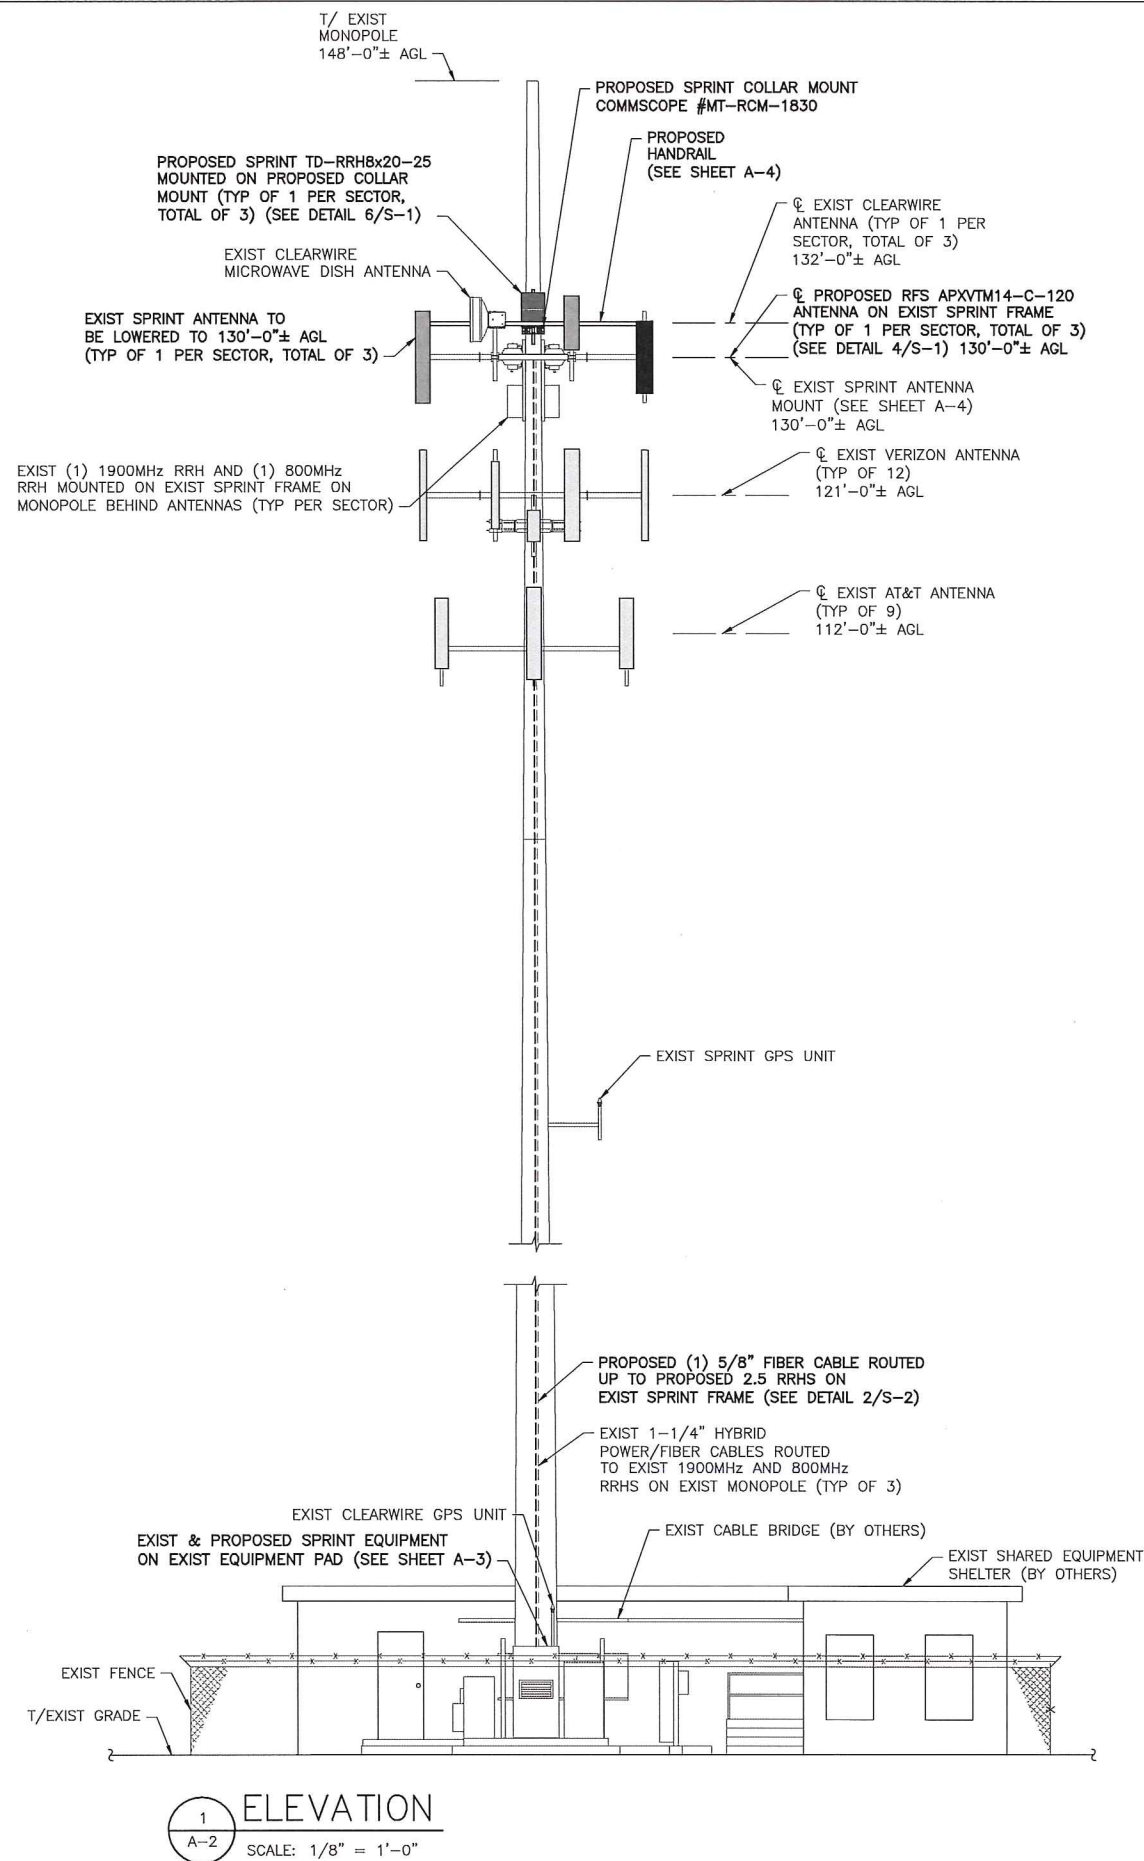

1 ELEVATION  
A-2 SCALE: 1/8" = 1'-0"

THE EXISTING MOUNT HAS BEEN ANALYZED BY TECTONIC ENGINEERING AND FOUND TO BE ADEQUATE TO SUPPORT THE PROPOSED SPRINT UPGRADE ONCE THE PROPOSED MODIFICATIONS HAVE BEEN COMPLETED AS DETAILED IN THE STRUCTURAL ANALYSIS EVALUATION LETTER DATED 9/5/14, REV 1.

THE EXISTING MONOPOLE SHALL BE ANALYZED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF CONNECTICUT (TO BE COORDINATED BY OTHERS)

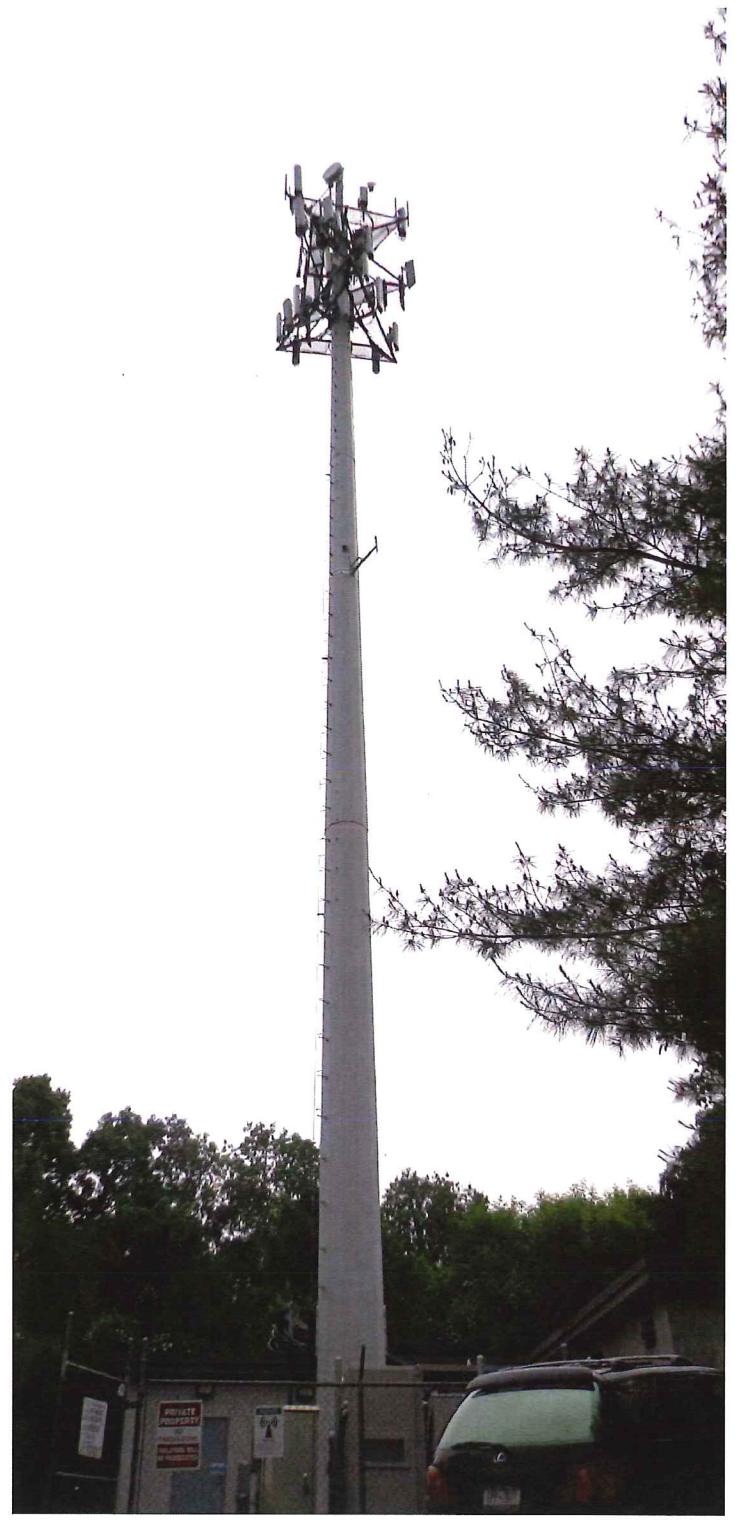

**Sprint**  
2.5 EQUIPMENT DEPLOYMENT  
6580 SPRINT PARKWAY  
OVERLAND PARK, KANSAS 66251

**CROWN CASTLE**

**TECTONIC** ENGINEERING & SURVEYING CONSULTANTS P.C.  
1279 Route 300  
Newburgh, NY 12550  
Phone: (845) 567-6656  
Fax: (845) 567-8703  
www.tectonicengineering.com


THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF SPRINT COMMUNICATIONS, INC. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

**SUBMITTALS**

PROJECT NO: 7225.CT03XC008

NO	DATE	DESCRIPTION	BY
0	6/18/14	FOR COMMENT	DC
1	8/7/14	PER COMMENTS	MP
2	9/5/14	FOR CONSTRUCTION	MP

DATE: 9/5/14 REVIEWED BY: JMQ



SITE NUMBER: CT03XC008  
SITE NAME: BEAUMONT FARM  
SITE ADDRESS: 945 EAST CENTER ST. WALLINGFORD, CT 06492

SHEET TITLE: ELEVATION

SHEET NO: A-2

**Sprint**  
 2.5 EQUIPMENT DEPLOYMENT  
 6580 SPRINT PARKWAY  
 OVERLAND PARK, KANSAS 66251

**CROWN CASTLE**

**TECTONIC**  
 • PLANNING  
 • ENGINEERING  
 • SURVEYING  
 • CONSTRUCTION MANAGEMENT  
**TECTONIC** Engineering & Surveying  
 Consultants P.C.  
 1279 Route 300  
 Newburgh, NY 12550  
 Phone: (845) 567-6656  
 Fax: (845) 567-8703  
 www.tectonicengineering.com


THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF SPRINT COMMUNICATIONS, INC. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

**SUBMITTALS**

PROJECT NO: 7225.CT03XC008

NO	DATE	DESCRIPTION	BY
0	6/18/14	FOR COMMENT	DC
1	8/7/14	PER COMMENTS	MP
2	9/5/14	FOR CONSTRUCTION	MP

DATE: 9/5/14  
 REVIEWED BY: JMQ




SITE NUMBER:  
 CT03XC008  
 SITE NAME:  
 BEAUMONT FARM  
 SITE ADDRESS:  
 945 EAST CENTER ST.  
 WALLINGFORD, CT 06492

SHEET TITLE:  
 ENLARGED EQUIPMENT  
 LAYOUT PLANS

SHEET NO:  
 A-3


**NORTH NOTE:**  
 NORTH SHOWN HAS BEEN ESTABLISHED USING THE USGS QUADRANGLE 7.5 MINUTE MAPS AND IS APPROXIMATE. VERIFY TRUE NORTH PRIOR TO INSTALLATION OF ANTENNAS.

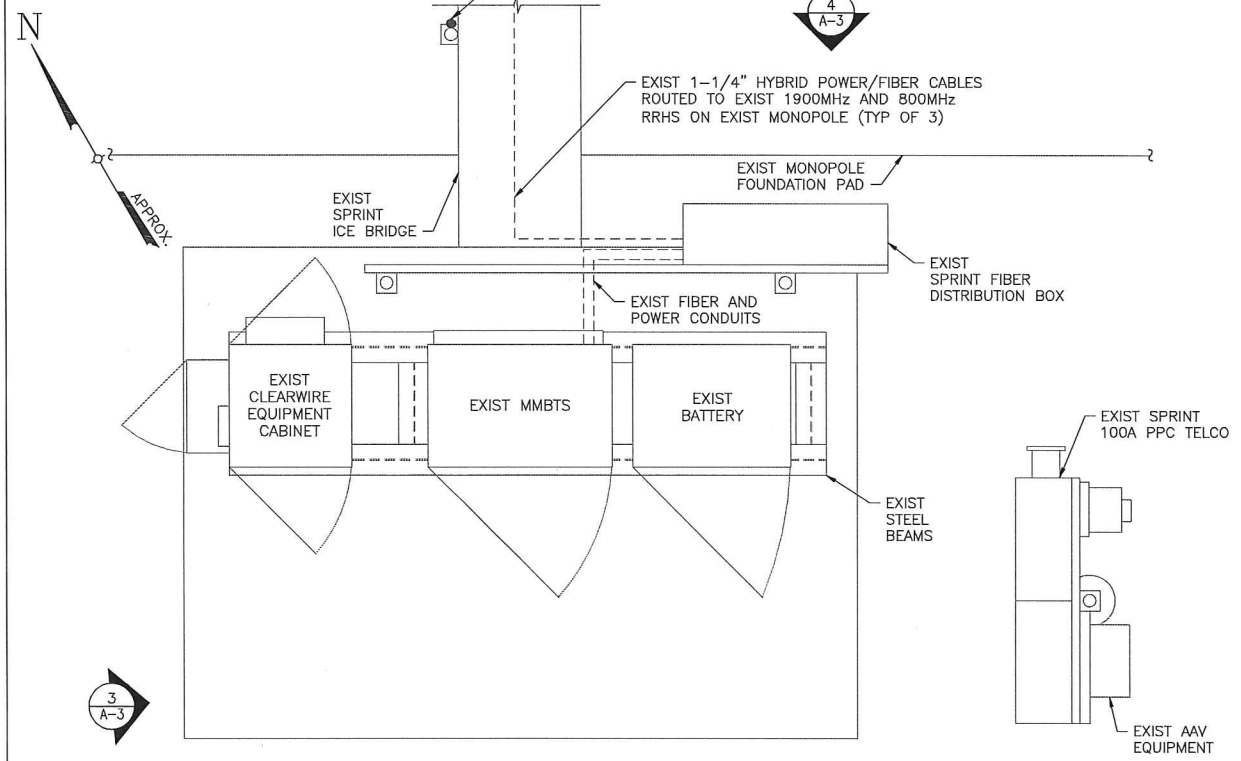

**1** EQUIPMENT PLAN (EXIST)  
 SCALE: 1/2" = 1'-0"



**3** EXIST EQUIPMENT PAD  
 SCALE: N.T.S.

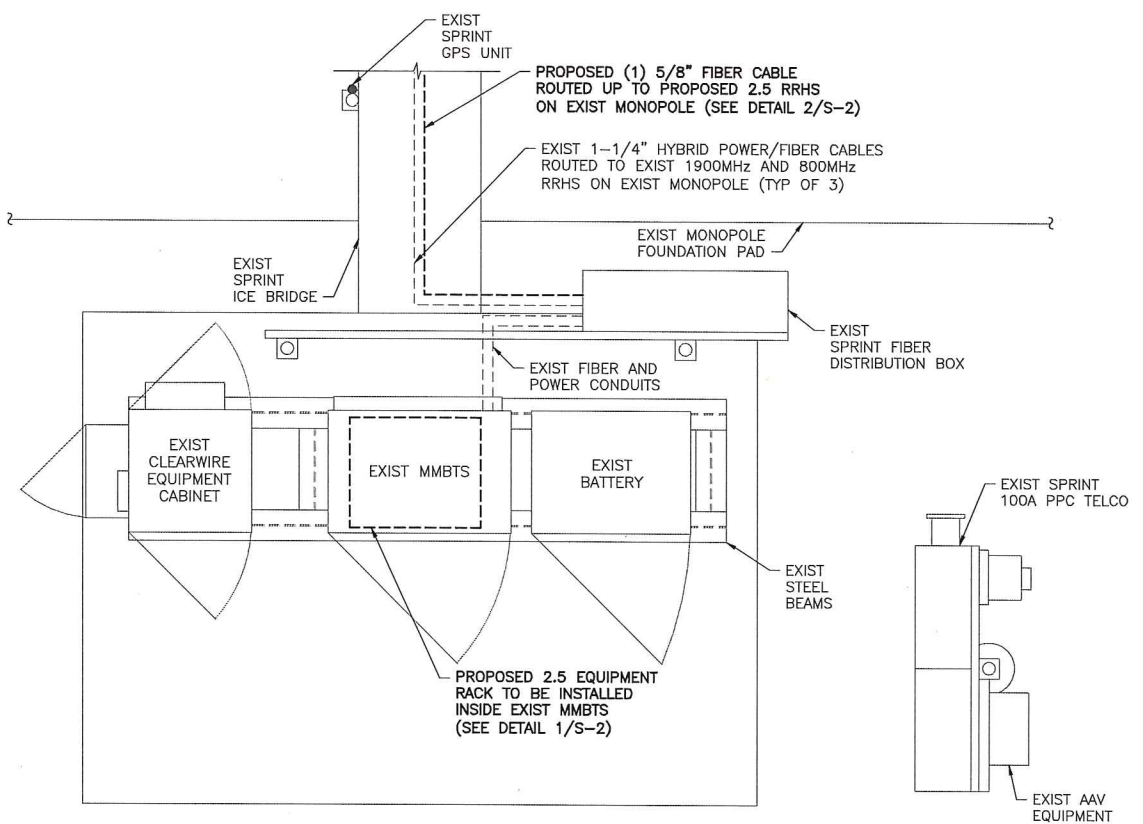


**2** EQUIPMENT PLAN (FINAL)  
 SCALE: 1/2" = 1'-0"




**4** EXIST FIBER DISTRIBUTION BOX  
 SCALE: N.T.S.



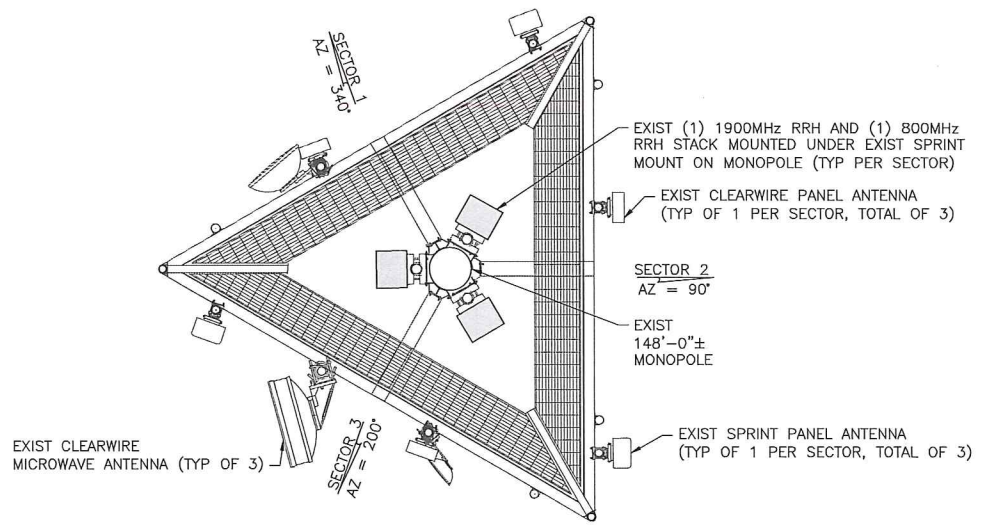

1 ANTENNA LAYOUT PLAN (EXIST)  
SCALE: 3/8" = 1'-0"

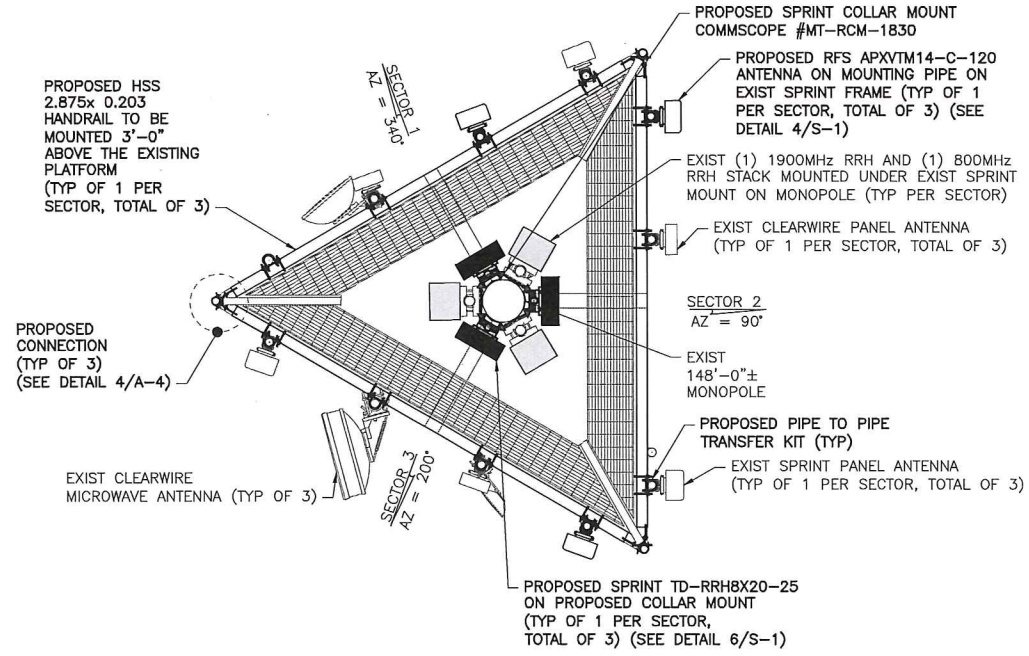



2 ANTENNA LAYOUT PLAN (FINAL)  
SCALE: 3/8" = 1'-0"

**ANTENNA DATA**


Status	Exist	Proposed
Antenna Manufacturer	RFS-CELWAVE	RFS-CELWAVE
Antenna Model Number	APXVSP18-C-A20/APXV9ERR18-C-A20	APXV9TM14-ALV-120
Number of Antennas	3	3
Antenna RAD Center	130'	130'
Antenna Azimuth	90/200/340	90/200/340
Antenna RRH Model Number	800MHz/1900MHz	TD-RRH8x20-25
Number of RRH	6	3

THE EXISTING MOUNT HAS BEEN ANALYZED BY TECTONIC ENGINEERING AND FOUND TO BE ADEQUATE TO SUPPORT THE PROPOSED SPRINT UPGRADE ONCE THE PROPOSED MODIFICATIONS HAVE BEEN COMPLETED AS DETAILED IN THE STRUCTURAL ANALYSIS EVALUATION LETTER DATED 9/5/14, REV 1.


THE EXISTING MONOPOLE SHALL BE ANALYZED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF CONNECTICUT (TO BE COORDINATED BY OTHERS)

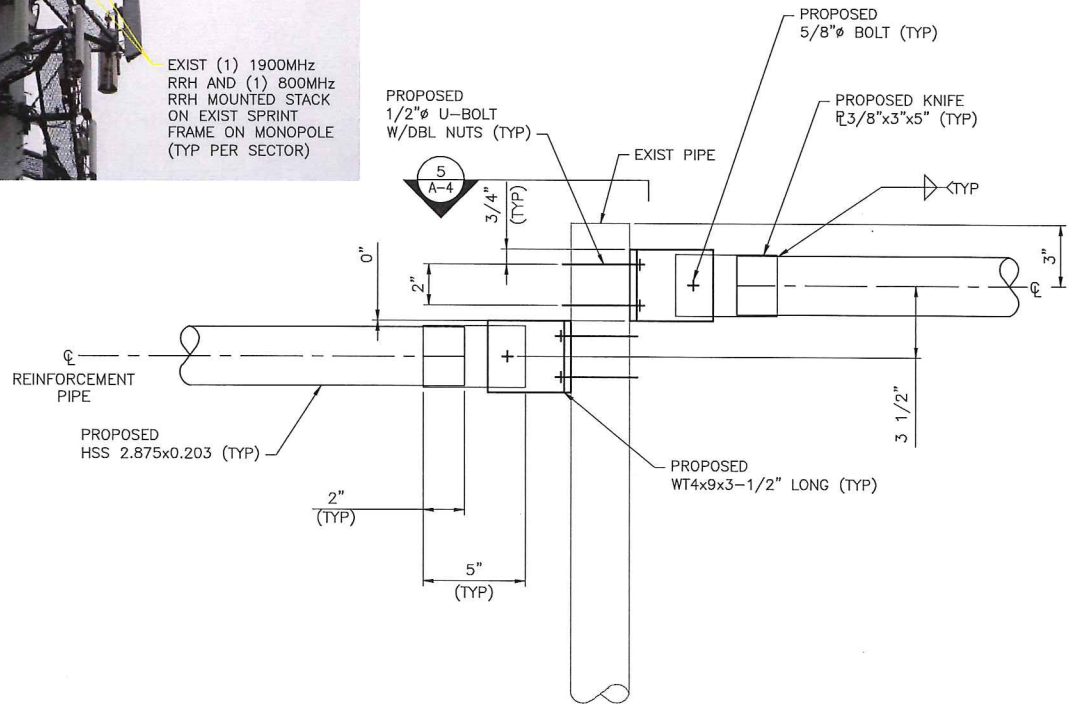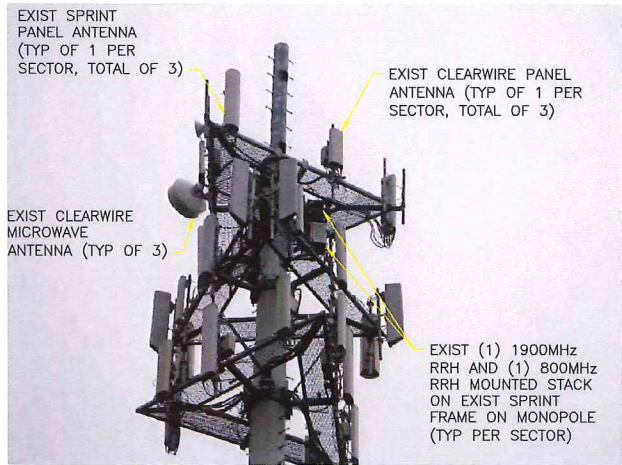

4 DETAIL  
SCALE: 3" = 1'-0"

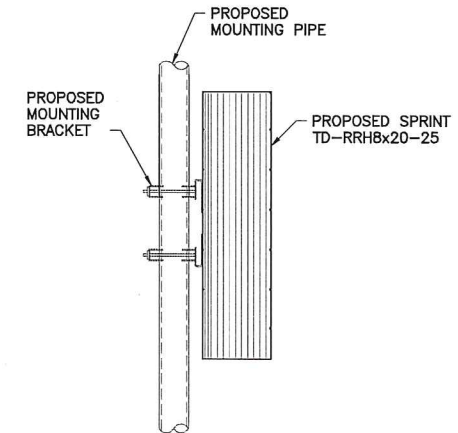

3 RRH MOUNTING DETAIL  
SCALE: 1 1/2" = 1'-0"

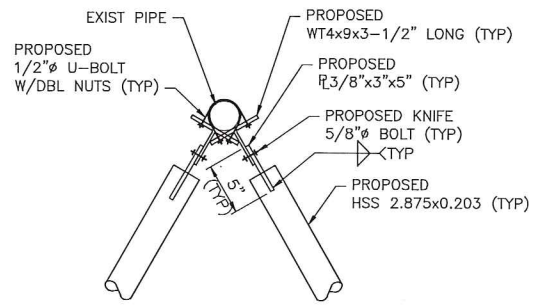

5 CONNECTION DETAIL  
SCALE: 1 1/2" = 1'-0"

**Sprint**  
2.5 EQUIPMENT DEPLOYMENT  
6580 SPRINT PARKWAY  
OVERLAND PARK, KANSAS 66251

**CROWN CASTLE**

**TECTONIC**  
• PLANNING  
• ENGINEERING  
• SURVEYING  
• CONSTRUCTION MANAGEMENT  
TECTONIC Engineering & Surveying Consultants P.C.  
1279 Route 300  
Newburgh, NY 12550  
Phone: (845) 567-6656  
Fax: (845) 567-8703  
www.tectonicengineering.com


THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF SPRINT COMMUNICATIONS, INC. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

**SUBMITTALS**

PROJECT NO: 7225.CT03XC008

NO	DATE	DESCRIPTION	BY
0	6/18/14	FOR COMMENT	DC
1	8/7/14	PER COMMENTS	MP
2	9/5/14	FOR CONSTRUCTION	MP


DATE: 9/5/14 REVIEWED BY: JMG




SITE NUMBER: CT03XC008  
SITE NAME: BEAUMONT FARM  
SITE ADDRESS: 945 EAST CENTER ST. WALLINGFORD, CT 06492

SHEET TITLE: ANTENNA LAYOUT PLANS


SHEET NO: A-4

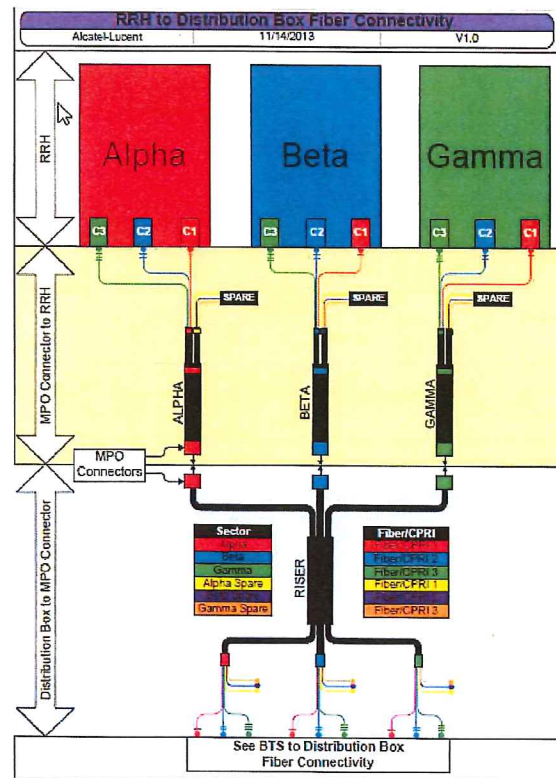


1 2.5 CABLE COLOR CODING  
A-5 SCALE: N.T.S.

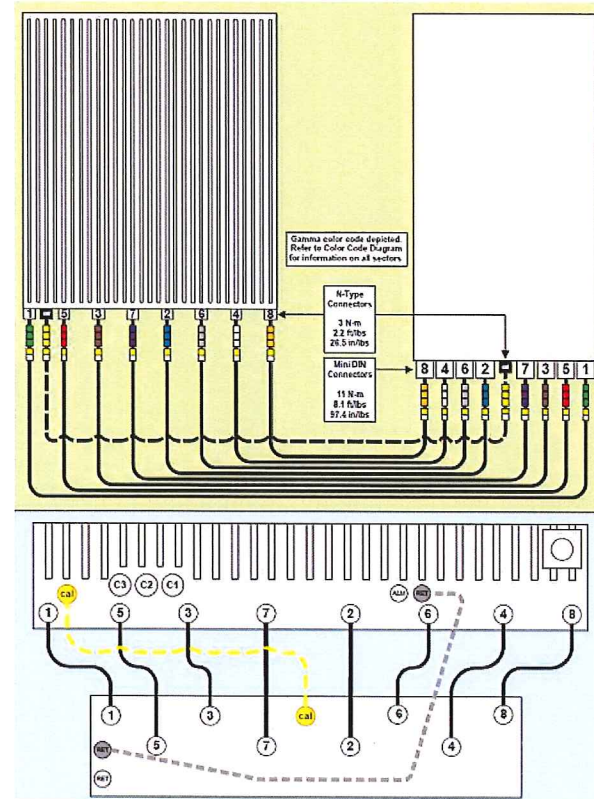

2 RRH CONNECTIVITY  
A-5 SCALE: N.T.S.

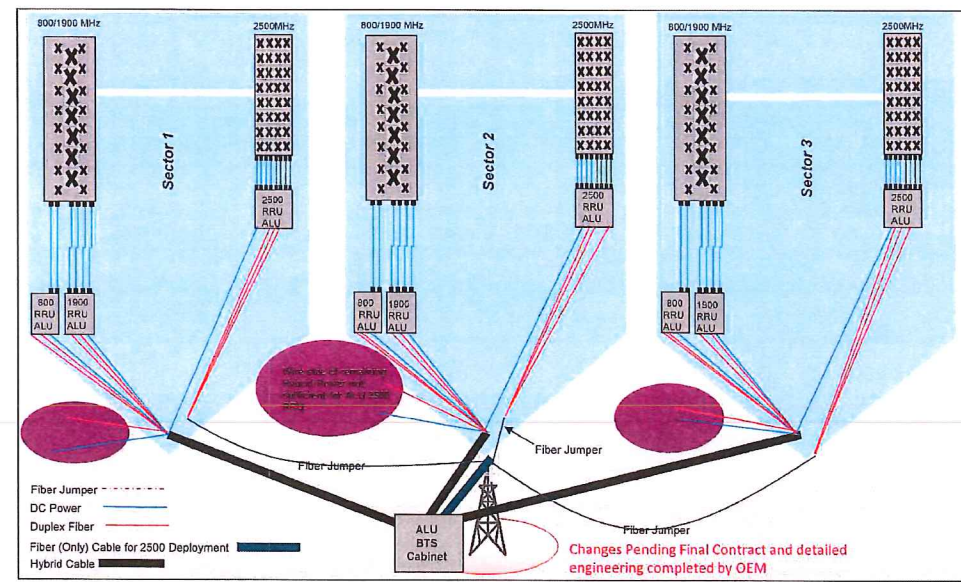

3 RAN WIRING  
A-5 SCALE: N.T.S.

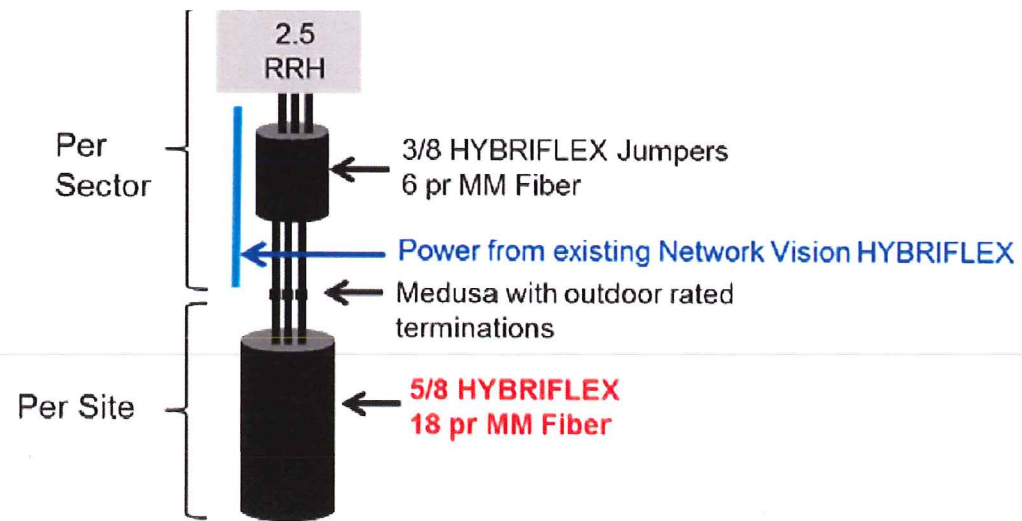

4 CABLE SCENARIO  
A-5 SCALE: N.T.S.

**Sprint**  
2.5 EQUIPMENT DEPLOYMENT  
6580 SPRINT PARKWAY  
OVERLAND PARK, KANSAS 66251

**CROWN CASTLE**

**TECTONIC** ENGINEERING & SURVEYING CONSULTANTS P.C.  
1279 Route 300  
Newburgh, NY 12550  
Phone: (845) 567-6656  
Fax: (845) 567-8703  
www.tectonicengineering.com


THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF SPRINT COMMUNICATIONS, INC. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

**SUBMITTALS**

PROJECT NO: 7225.CT03XC008

NO	DATE	DESCRIPTION	BY
0	6/18/14	FOR COMMENT	DC
1	8/7/14	PER COMMENTS	MP
2	9/5/14	FOR CONSTRUCTION	MP

DATE: 9/5/14  
REVIEWED BY: JMO



SITE NUMBER: CT03XC008  
SITE NAME: BEAUMONT FARM  
SITE ADDRESS: 945 EAST CENTER ST. WALLINGFORD, CT 06492


SHEET TITLE: RAN WIRING DIAGRAM

SHEET NO: A-5

IMPORTANT!! LINE UP WHITE MARKINGS ON JUMPER AND RISER IP-MPO CONNECTOR. PUSH THE WHITE MARK ON THE JUMPER CONNECTOR FLUSH AGAINST THE RED SEAL ON THE RISER CONNECTION




IMPORTANT!! ROTATE THE BAYONET HOUSING CLOCKWISE UNTIL A CLICK SOUND IS HEARD TO ENSURE A GOOD CONNECTION

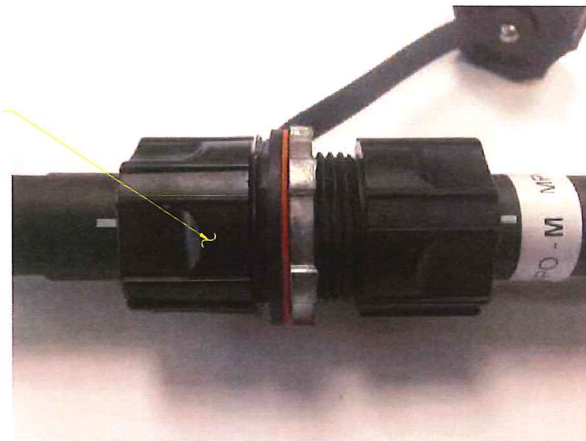


1 HYBRIFLEX RISER/JUMPER CONNECTION DETAILS  
SCALE: N.T.S.

TRUNK-LINE TO JUMPER CONNECTION (MPO) TO BE INSTALLED PER MANUFACTURER REQUIREMENTS. SEE DETAIL.

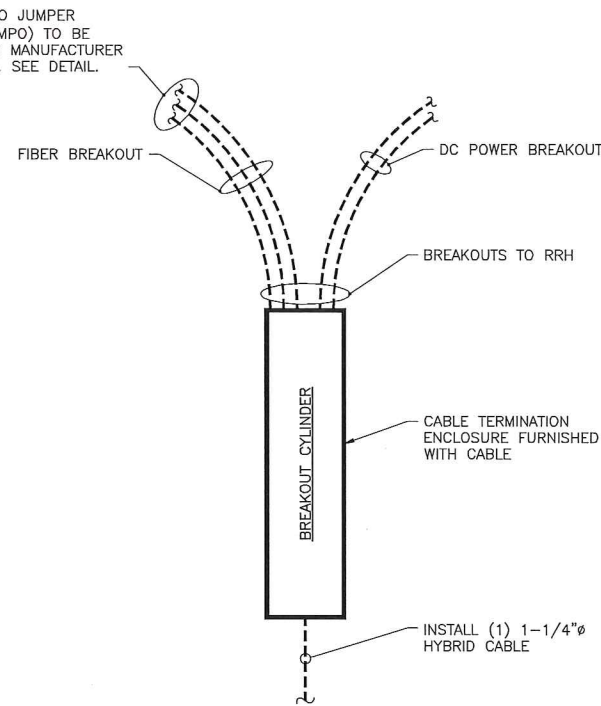

2.5 HYBRID CABLE W/FIBER & DC FEEDERS

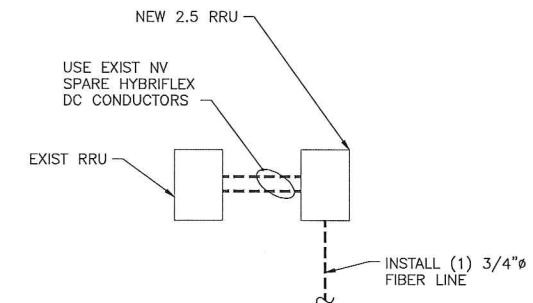

FIBER ONLY TRUNK LINES

2 TRUNK LINE DETAILS (TYPICAL)  
SCALE: N.T.S.

**SPECIAL NOTES: CABLE MARKINGS AT RAD CENTER AND ALL WALL/BLDG. PENETRATIONS**

- ALL COLOR CODE TAPE SHALL BE 3M-35 AND SHALL BE INSTALLED USING A MINIMUM OF (3) WRAPS OF TAPE.
- ALL COLOR BANDS INSTALLED AT THE TOWER TOP SHALL BE A MINIMUM OF 3" WIDE AND SHALL HAVE A MINIMUM OF 3/4" OF SPACING BETWEEN EACH COLOR.
- ALL COLOR BANDS INSTALLED AT OR NEAR THE GROUND MAY BE ONLY 3/4" WIDE. EACH TOP-JUMPER SHALL BE COLOR CODED WITH (1) SET OF 3" WIDE BANDS.
- EACH MAIN COAX SHALL BE COLOR CODED WITH (1) SET OF 3" BANDS NEAR THE TOP-JUMPER CONNECTION AND WITH 3/4" COLOR BANDS JUST PRIOR TO ENTERING THE BTS OR TRANSMITTER BUILDING.
- ALL BOTTOM JUMPERS SHALL BE COLOR CODED WITH (1) SET OF 3/4" BANDS ON EACH END OF THE BOTTOM JUMPER.
- ALL COLOR CODES SHALL BE INSTALLED SO AS TO ALIGN NEATLY WITH ONE ANOTHER FROM SIDE-TO-SIDE.
- EACH COLOR BAND SHALL HAVE A MINIMUM OF (3) WRAPS AND SHALL BE NEATLY TRIMMED AND SMOOTHED OUT AS TO AVOID UNRAVELING.
- X-POLE ANTENNAS SHOULD USE "XX-1" FOR THE "+45" PORT, "XX-2" FOR THE "-45" PORT.
- COLOR BAND #4 REFERS TO THE FREQUENCY BAND: ORANGE=850, VIOLET=1900. USED ON JUMPERS ONLY.
- RF FEEDLINE SHALL BE IDENTIFIED WITH A METAL TAG (STAINLESS OR BRASS) AND STAMPED WITH THE SECTOR, ANTENNA POSITION, AND CABLE NUMBER.
- ANTENNAS MUST BE IDENTIFIED, USING THE SECTOR LETTER AND ANTENNA NUMBER, WITH A BLACK MARKER PRIOR TO INSTALLATION.

**Sprint**  
2.5 EQUIPMENT DEPLOYMENT  
6580 SPRINT PARKWAY  
OVERLAND PARK, KANSAS 66251

**CROWN CASTLE**


**TECTONIC** • PLANNING  
• ENGINEERING  
• SURVEYING  
• CONSTRUCTION  
MANAGEMENT  
**TECTONIC** Engineering & Surveying  
Consultants P.C.  
1279 Route 300  
Newburgh, NY 12550  
Phone: (845) 567-6656  
Fax: (845) 567-8703  
www.tectonicengineering.com

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF SPRINT COMMUNICATIONS, INC. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

**SUBMITTALS**

NO	DATE	DESCRIPTION	BY
0	6/18/14	FOR COMMENT	DC
1	8/7/14	PER COMMENTS	MP
2	9/5/14	FOR CONSTRUCTION	MP


DATE	REVIEWED BY
9/5/14	SMC



SITE NUMBER:  
CT03XC008  
SITE NAME:  
BEAUMONT FARM  
SITE ADDRESS:  
945 EAST CENTER ST.  
WALLINGFORD, CT 06492


SHEET TITLE:  
CABLE DETAILS

SHEET NO:  
A-6

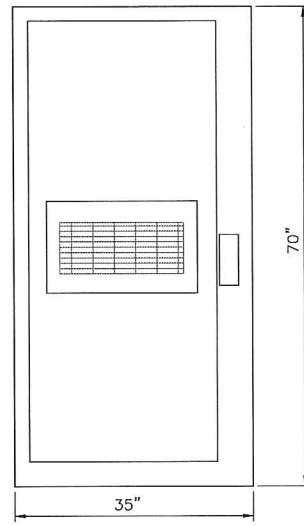

CABINET FRONT 9928 MMBTS MODULAR CELL	
SPECIFICATIONS:	
HEIGHT:	70"
WIDTH:	35"
DEPTH:	37.8"
WEIGHT:	1090 LBS.


FRONT

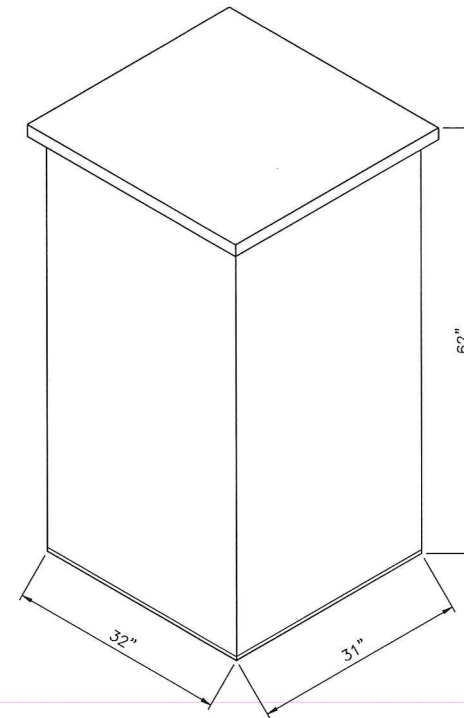

ANDREW 60ECv2	
SPECIFICATIONS:	
HEIGHT:	60"
WIDTH:	31"
DEPTH:	30"
WEIGHT:	2430 LBS.


1 (EXIST) MMBTS CABINET

S-1 SCALE: 1" = 1'-0"

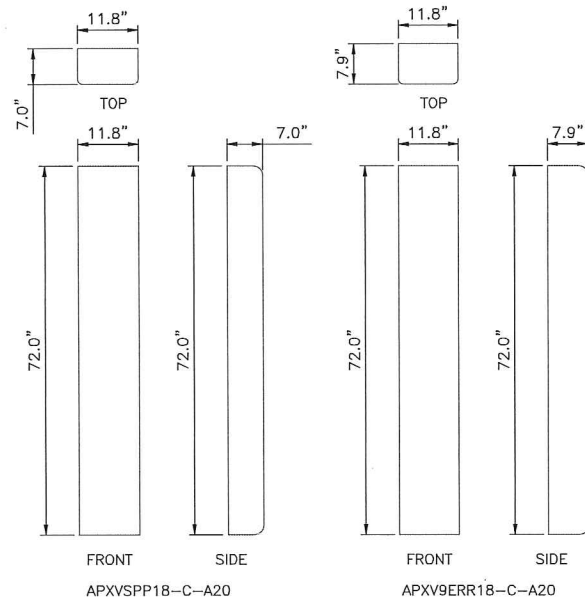


2 (EXIST) BATTERY CABINET

S-1 SCALE: 1" = 1'-0"

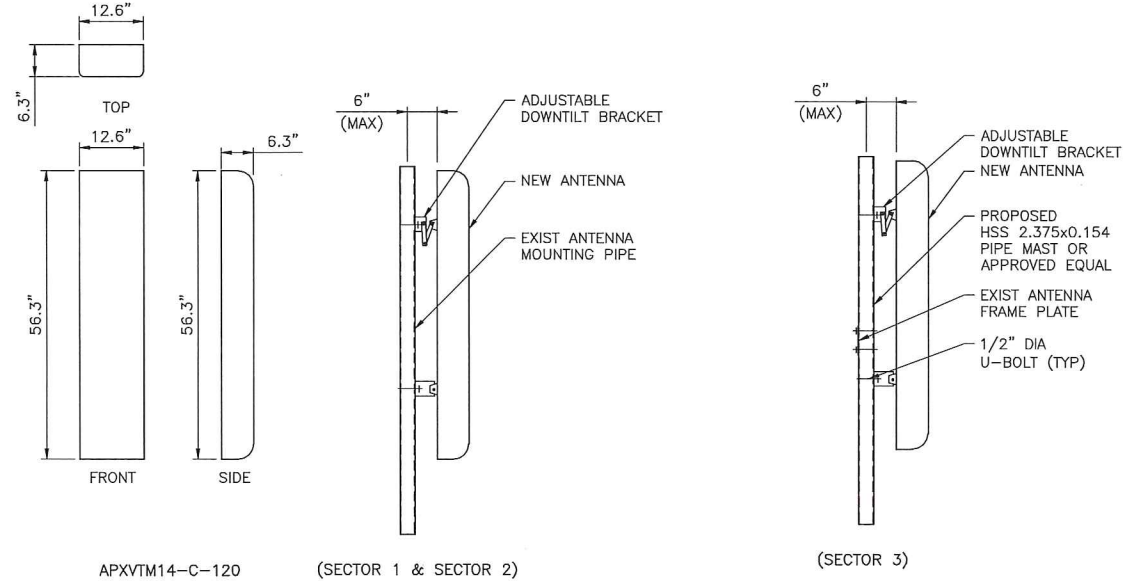


3 (EXIST) ANTENNA DETAILS

S-1 SCALE: 3/4"=1'-0"

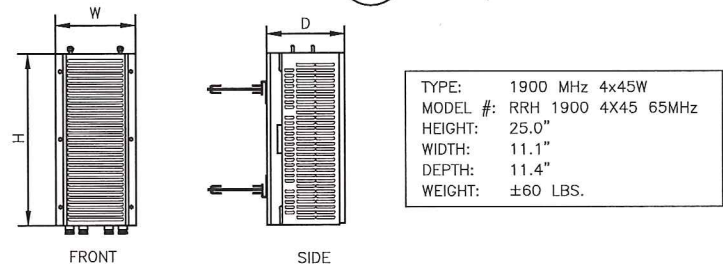

4 (PROPOSED) ANTENNA DETAIL

S-1 SCALE: 3/4"=1'-0"

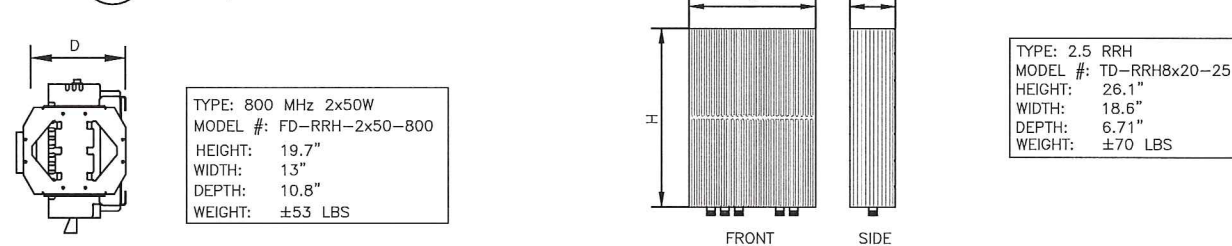

5 (EXIST) RRH DETAILS

S-1 SCALE: 1 1/2"=1'-0"

6 (PROPOSED) RRH DETAIL

S-1 SCALE: N.T.S.

**Sprint**  
2.5 EQUIPMENT DEPLOYMENT  
6580 SPRINT PARKWAY  
OVERLAND PARK, KANSAS 66251

**CROWN CASTLE**


**TECTONIC**  
• PLANNING  
• ENGINEERING  
• SURVEYING  
• CONSTRUCTION MANAGEMENT  
**TECTONIC Engineering & Surveying Consultants P.C.**  
1279 Route 300  
Newburgh, NY 12550  
Phone: (845) 567-6656  
Fax: (845) 567-8703  
www.tectonicengineering.com

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF SPRINT COMMUNICATIONS, INC. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

SUBMITTALS

PROJECT NO: 7225.CT03XC008			
NO	DATE	DESCRIPTION	BY
0	6/18/14	FOR COMMENT	DC
1	8/7/14	PER COMMENTS	MP
2	9/5/14	FOR CONSTRUCTION	MP

DATE	REVIEWED BY
9/5/14	JMA



SITE NUMBER:  
CT03XC008  
SITE NAME:  
BEAUMONT FARM  
SITE ADDRESS:  
945 EAST CENTER ST.  
WALLINGFORD, CT 06492

SHEET TITLE:  
EQUIPMENT DETAILS


SHEET NO:  
S-1

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF SPRINT COMMUNICATIONS, INC. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

### SUBMITTALS

NO	DATE	DESCRIPTION	BY
0	6/18/14	FOR COMMENT	DC
1	8/7/14	PER COMMENTS	MP
2	9/5/14	FOR CONSTRUCTION	MP

DATE	REVIEWED BY
9/5/14	JMA



SITE NUMBER:  
CT03XC008


SITE NAME:  
BEAUMONT FARM

SITE ADDRESS:  
945 EAST CENTER ST.  
WALLINGFORD, CT 06492

SHEET TITLE:  
EQUIPMENT  
SCHEMATIC DETAILS

SHEET NO:  
S-2

NOTE:  
LOCATIONS SHOWN FOR  
INSTALLATION OF NEW  
EQUIPMENT IN EXISTING  
CABINET ARE APPROXIMATE.  
ACTUAL SPACE AVAILABLE  
TO BE VERIFIED IN FIELD  
ON A SITE BY SITE BASIS.

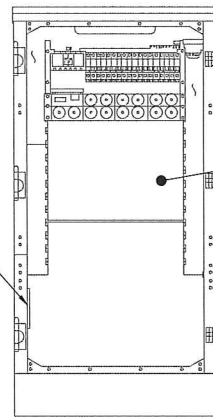

FRONT ELEVATION  
(CABINET INTERIOR)

EXIST GROUND  
BAR TO BE UTILIZED

INSTALL NEW 2.5  
EQUIPMENT IN EXIST MMBTS  
CABINET INCLUDING BUT  
NOT LIMITED TO BASE BAND  
UNIT, CELL SITE ROUTER  
AND SURGE ARRESTORS.  
GROUND EQUIPMENT TO  
EXIST INTERIOR CABINET  
GROUND BAR

### 1 MMBTS INTERIOR DETAIL

SCALE: N.T.S.


### RFS HYBRIFLEX RISER CABLES SCHEDULE

Power	Hybrid cable	Length	
Fiber Only (Existing DC Power)	MN: HB058-M12-050F 12x multi-mode fiber pairs, Top: Outdoor protected connectors, Bottom: LC Connectors, 5/8 cable, 50ft	50 ft	
	MN: HB058-M12-075F	75 ft	
	MN: HB058-M12-100F	100 ft	
	MN: HB058-M12-125F	125 ft	
	MN: HB058-M12-150F	150 ft	
	MN: HB058-M12-175F	175 ft	
8 AWG Power	MN: HB114-08U3M12-050F 3x 8 AWG power pairs, 12x multi-mode fiber pairs, Outdoor rated connectors & LC Connectors, 1 1/4 cable, 50ft	50 ft	
	MN: HB114-08U3M12-075F	75 ft	
	MN: HB114-08U3M12-100F	100 ft	
	MN: HB114-08U3M12-125F	125 ft	
	MN: HB114-08U3M12-150F	150 ft	
	MN: HB114-08U3M12-175F	175 ft	
6 AWG Power	MN: HB114-13U3M12-225F 3x 6 AWG power pairs, 12x multi-mode fiber pairs, Outdoor rated connectors & LC Connectors, 1 1/4 cable, 225ft	225 ft	
	MN: HB114-13U3M12-250F	250 ft	
	MN: HB114-13U3M12-275F	275 ft	
	MN: HB114-13U3M12-300F	300 ft	
	4 AWG Power	MN: HB114-21U3M12-225F 3x 4 AWG power pairs, 12x multi-mode fiber pairs, Outdoor rated connectors & LC Connectors, 1 1/4 cable, 225ft	325 ft
		MN: HB114-21U3M12-350F	350 ft
MN: HB114-21U3M12-375F		375 ft	

### RFS HYBRIFLEX JUMPER CABLE SCHEDULE

Power	Hybrid Jumper cable	Length
Fiber Only	MN: HBF012-M3-5F1 5 ft, 3x multi-mode fiber pairs, Outdoor & LC connectors, 1/2 cable	5 ft
	MN: HBF012-M3-10F1	10 ft
	MN: HBF012-M3-15F1	15 ft
	MN: HBF012-M3-20F1	20 ft
	MN: HBF012-M3-25F1	25 ft
	MN: HBF012-M3-30F1	30 ft
8 AWG Power	MN: HBF058-08U1M3-5F1 5 ft, 1x 8 AWG power pair, 3x multi-mode fiber pairs, Outdoor & LC Connectors, 5/8 cable	5 ft
	MN: HBF058-08U1M3-10F1	10 ft
	MN: HBF058-08U1M3-15F1	15 ft
	MN: HBF058-08U1M3-20F1	20 ft
	MN: HBF058-08U1M3-25F1	25 ft
	MN: HBF058-08U1M3-30F1	30 ft
6 AWG Power	MN: HBF058-13U1M3-5F1 5 ft, 1x 6 AWG power pair, 3x multi-mode fiber pairs, Outdoor & LC Connectors, 5/8 cable	5 ft
	MN: HBF058-13U1M3-10F1	10 ft
	MN: HBF058-13U1M3-15F1	15 ft
	MN: HBF058-13U1M3-20F1	20 ft
	MN: HBF058-13U1M3-25F1	25 ft
	MN: HBF058-13U1M3-30F1	30 ft
4 AWG Power	MN: HBF078-21U1M3-5F1 5 ft, 1x 4 AWG power pair, 3x multi-mode fiber pairs, Outdoor & LC Connectors, 7/8 cable	5 ft
	MN: HBF078-21U1M3-10F1	10 ft
	MN: HBF078-21U1M3-15F1	15 ft
	MN: HBF078-21U1M3-20F1	20 ft
	MN: HBF078-21U1M3-25F1	25 ft
	MN: HBF078-21U1M3-30F1	30 ft

- LEGEND:
- P1000T-HG UNISTRUT, 12" LONG.
  - 6" PIPE HANGER.
  - EXISTING SUPPORT PIPE.
  - NEW STANDOFF BRACKET, ANDREW PART# 30848-4.
  - NEW ROUND MEMBER ADAPTER SIZED FOR EXISTING PIPE SUPPORT.
  - BREAKOUT UNIT.
  - CABLE.



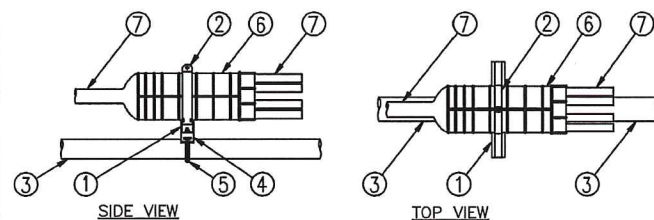


### 3 MEDUSA HEAD DETAIL

SCALE: NTS

### HYBRID CABLE DC CONDUCTOR SIZE GUIDELINE

MANUF:	RFS	DC CONDUCTOR	CABLE DIAMETER
CABLE	LENGTH	USE NV HYBRIFLEX	7/8"
FIBER ONLY	VARIES		
HYBRIFLEX	<200'	8 AWG	1-1/4"
HYBRIFLEX	225-300'	6 AWG	1-1/4"
HYBRIFLEX	325-375'	4 AWG	1-1/4"

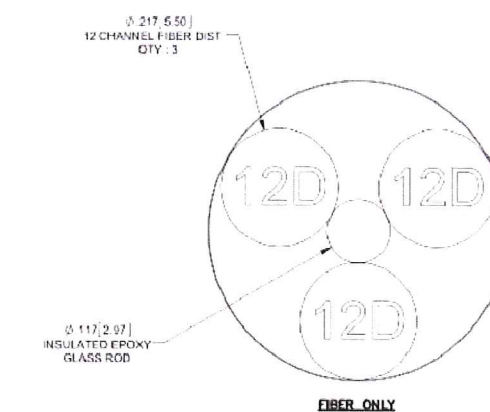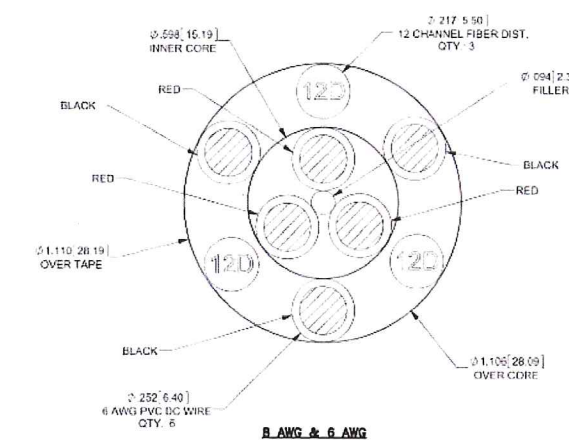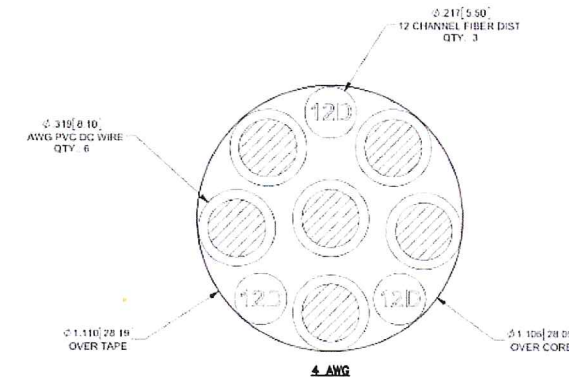

### 2 2.5 HYBRID CABLE X-SECTION AND DATA

SCALE: NTS


THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF SPRINT COMMUNICATIONS, INC. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

#### SUBMITTALS

PROJECT NO: 7225.CT03XC008

NO	DATE	DESCRIPTION	BY
0	6/18/14	FOR COMMENT	DC
1	8/7/14	PER COMMENTS	MP
2	9/5/14	FOR CONSTRUCTION	MP

DATE	REVIEWED BY
9/5/14	JMO




SITE NUMBER:  
CT03XC008

SITE NAME:  
BEAUMONT FARM


SITE ADDRESS:  
945 EAST CENTER ST.  
WALLINGFORD, CT 06492

SHEET TITLE:  
ELECTRICAL & GROUNDING  
PLANS

SHEET NO:  
E-1

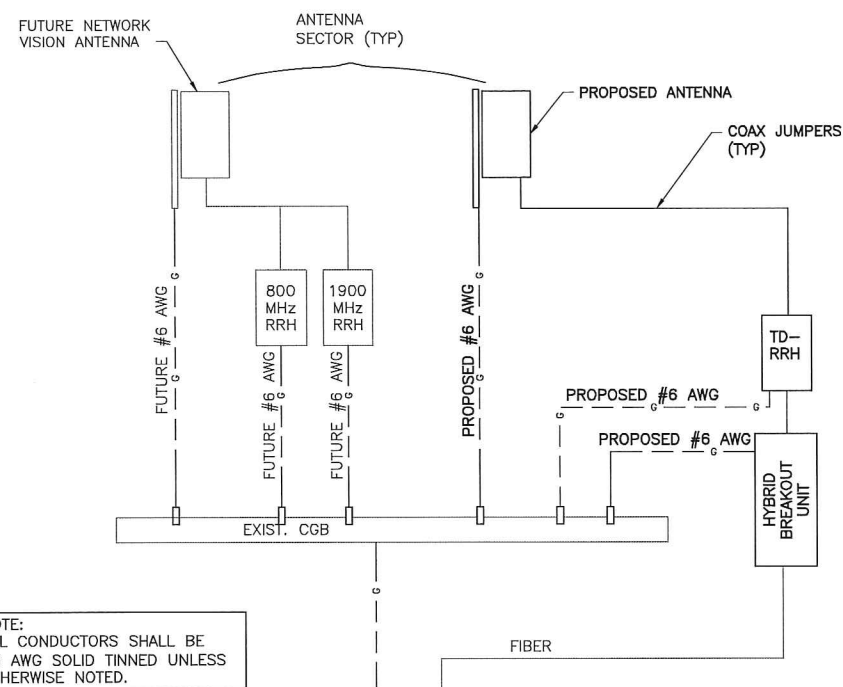

NOTE:  
ALL CONDUCTORS SHALL BE #6 AWG SOLID TINNED UNLESS OTHERWISE NOTED.

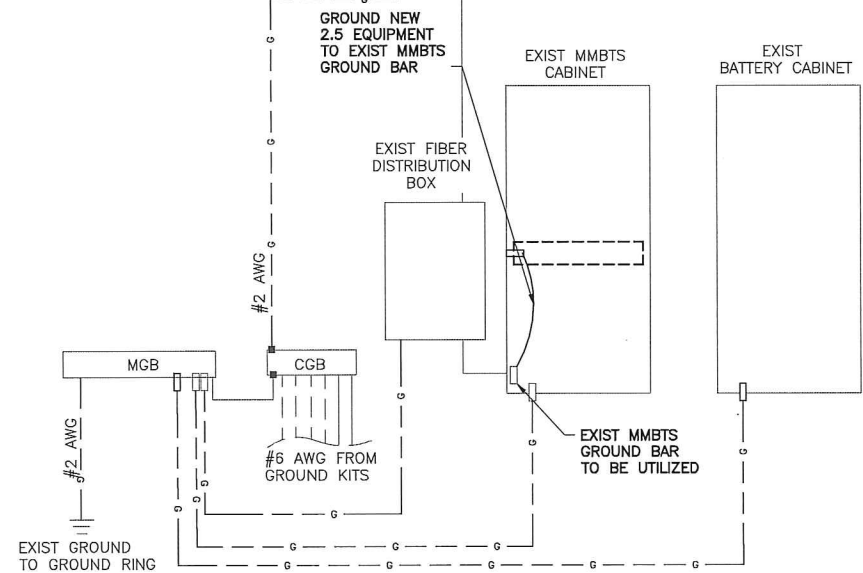


EXIST CABINET GROUNDING


LEGEND

- CADWELD CONNECTION
- MECHANICAL CONNECTION
- COMPRESSION CONNECTION


1 TYPICAL GROUNDING ONE LINE DIAGRAM  
E-1 SCALE: NTS

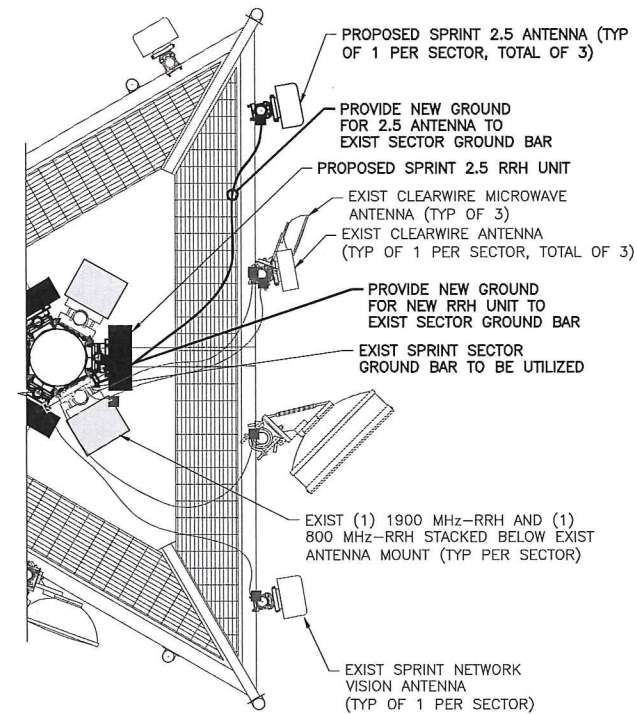

2 TYPICAL ANTENNA GROUNDING PLAN  
E-1 SCALE: NTS

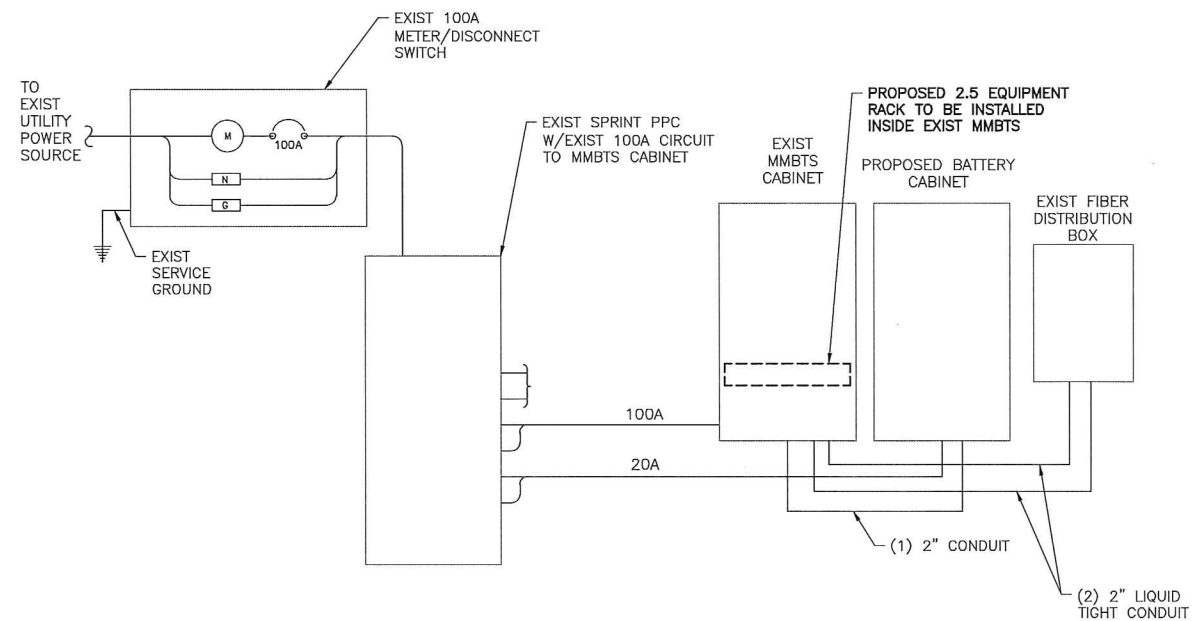

3 TYPICAL ELECTRICAL & TELCO PLAN  
E-1 SCALE: NTS

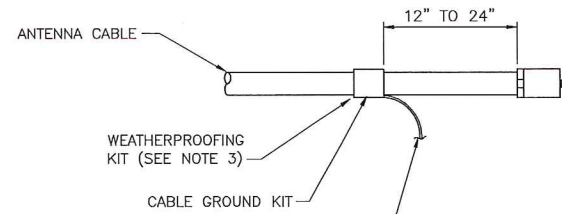

6 AWG STRANDED Cu WIRE WITH GREEN, 600V, THWN INSULATION OR BLACK, MARKED AS REQUIRED BY THE NEC (GROUNDED TO GROUND BAR) (SEE NOTES 1 & 2)

CONNECTION OF CABLE GROUND KIT TO ANTENNA CABLE


NOTES:

DO NOT INSTALL CABLE GROUND KIT AT A BEND AND ALWAYS DIRECT GROUND WIRE DOWN TO GROUND BAR.

GROUNDING KIT SHALL BE TYPE AND PART NUMBER AS SUPPLIED OR RECOMMENDED BY CABLE MANUFACTURER.


WEATHER PROOFING SHALL BE (TYPE AND PART NUMBER) AS SUPPLIED OR RECOMMENDED BY CABLE MANUFACTURER AND APPROVED BY CONTRACTOR.

1 CABLE GROUNDING KIT DETAIL  
E-2 SCALE: N.T.S.

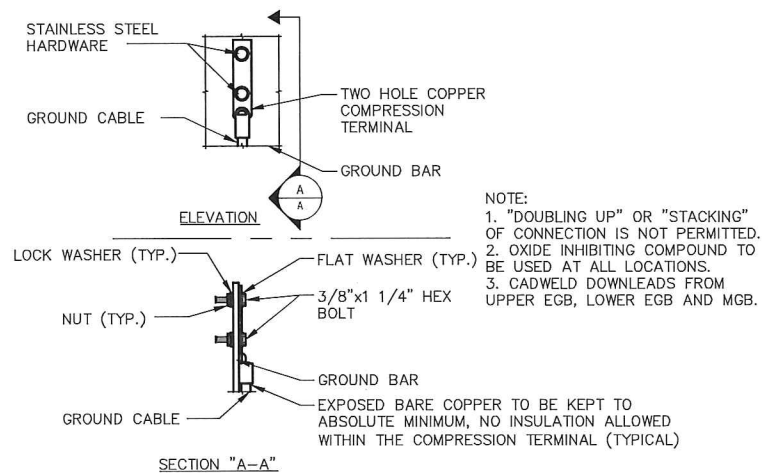

NOTE:  
1. "DOUBLING UP" OR "STACKING" OF CONNECTION IS NOT PERMITTED.  
2. OXIDE INHIBITING COMPOUND TO BE USED AT ALL LOCATIONS.  
3. CADWELD DOWNLOADS FROM UPPER EGB, LOWER EGB AND MGB.


2 GROUNDING BAR CONN. DETAIL  
E-2 SCALE: NTS

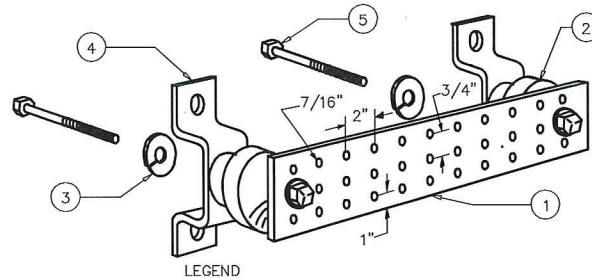

- LEGEND
- 1- COPPER TINNED GROUND BAR, 1/4"X 4"X 20", OR OTHER LENGTH AS REQUIRED, HOLE CENTERS TO MATCH NEMA DOUBLE LUG CONFIGURATION
  - 2- INSULATORS, NEWTON INSTRUMENT CAT. NO. 3061-4 OR EQUAL
  - 3- 5/8" LOCKWASHERS OR EQUAL
  - 4- WALL MOUNTING BRACKET, NEWTON INSTRUMENT CO. CAT NO. A-6056 OR EQUAL
  - 5- 5/8-11 X 1" H.H.C.S.BOLTS

NOTE:  
ALL BOLTS, NUTS, WASHERS AND LOCK WASHERS SHALL BE 18-8 STAINLESS STEEL.

3 GROUNDING BAR DETAIL  
E-2 SCALE: NTS

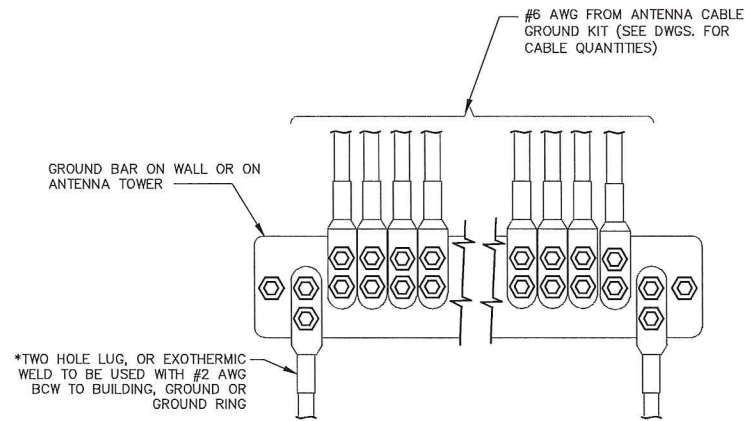

\*TWO HOLE LUG, OR EXOTHERMIC WELD TO BE USED WITH #2 AWG BCW TO BUILDING, GROUND OR GROUND RING

\* - GROUND BARS AT THE BOTTOM OF TOWERS/MONOPOLES SHALL ONLY USE EXOTHERMIC WELDS.

- ATTACH "DO NOT DISCONNECT" LABELS TO GROUND BARS. CAN USE BRASS TAG "DO NOT DISCONNECT" AT EACH HYBRID GROUND POINT OR BACK-A-LITE PLATE LABEL ON GROUND BAR.

- CONNECT SEQUENCE- BOLT/WASHER/NO-OX/GROUND BAR/NO-OX/WASHER/LOCK-WASHER/NUT. THIS IS REPEATED FOR EACH LUG CONNECTION POINT.

4 ANTENNA GROUND BAR DETAIL  
E-2 SCALE: NTS

GROUNDING NOTES:

1. GROUNDING SHALL BE IN ACCORDANCE WITH NEC ARTICLE 250-GROUNDING AND BONDING.
2. ALL GROUND WIRES SHALL BE #2 AWG UNLESS NOTED OTHERWISE.
3. ALL GROUNDING WIRES SHALL PROVIDE A STRAIGHT, DOWNWARD PATH TO GROUND WITH GRADUAL BENDS AS REQUIRED. GROUND WIRES SHALL NOT BE LOOPED OR SHARPLY BENT.
4. EACH EQUIPMENT CABINET SHALL BE CONNECTED TO THE MASTER ISOLATION GROUND BAR (MGB) WITH #2 AWG INSULATED STRANDED COPPER WIRE. EQUIPMENT CABINETS WALL HAVE (2) CONNECTIONS.
5. PROVIDE DEDICATED #2 AWG COPPER GROUND WIRE FROM EACH ANTENNA MOUNTING PIPE TO ASSOCIATED CIGBE.
6. THE CONTRACTOR SHALL VERIFY THAT THE EXISTING GROUND BARS HAVE ENOUGH SPACE/HOLES FOR ADDITIONAL TWO HOLE LUGS.
7. ALL CONDUITS SHALL BE RIGID GALVANIZED STEEL AND SHALL BE PROVIDED WITH GROUNDING BUSHINGS.
8. PROVIDE GROUND CONNECTIONS FOR ALL METALLIC STRUCTURES, ENCLOSURES, RACEWAYS AND OTHER CONDUCTIVE ITEMS ASSOCIATED WITH THE INSTALLATION OF CARRIER'S EQUIPMENT.
9. WHEN CABLE LENGTH IS OVER 20' THE MANUFACTURERS GROUND KIT MUST BE INSTALLED PER THE MANUFACTURERS SPECIFICATIONS.
10. REFER TO "ANTI-THEFT UPDATE TO SPRINT GROUNDING 082412.PDF" FOR GUIDELINE TO SUSPECTED OR ACTUAL THEFT OF GROUNDING.
11. HOME RUN GROUNDS ARE NOT APPROVED BY CROWN CASTLE CONSTRUCTION STANDARDS AND THAT ANTENNA BUSS BARS SHOULD BE INSTALLED DIRECTLY TO TOWER STEEL WITHOUT INSULATORS OR DOWN CONDUCTORS.

PROTECTIVE GROUNDING SYSTEM GENERAL NOTES:

1. AT ALL TERMINATIONS AT EQUIPMENT ENCLOSURES, PANEL, AND FRAMES OF EQUIPMENT AND WHERE EXPOSED FOR GROUNDING. CONDUCTOR TERMINATION SHALL BE PERFORMED UTILIZING TWO HOLE BOLTED TONGUE COMPRESSION TYPE LUGS WITH STAINLESS STEEL SELF-TAPPING SCREWS.
2. ALL CLAMPS AND SUPPORTS USED TO SUPPORT THE GROUNDING SYSTEM CONDUCTORS AND PVC CONDUITS SHALL BE PVC TYPE (NON CONDUCTIVE). DO NOT USE METAL BRACKETS OR SUPPORTS WHICH WOULD FORM A COMPLETE RING AROUND ANY GROUNDING CONDUCTOR.
3. ALL GROUNDING CONNECTIONS SHALL BE COATED WITH A COPPER SHIELD ANTI-CORROSIVE AGENT SUCH AS T&B KOPR SHIELD. VERIFY PRODUCT WITH PROJECT MANAGER.
4. ALL BOLTS, WASHERS, AND NUTS USED ON GROUNDING CONNECTIONS SHALL BE STAINLESS STEEL
5. INSTALL GROUND BUSHING ON ALL METALLIC CONDUITS AND BOND TO THE EQUIPMENT GROUND BUS IN THE PANEL BOARD.
6. GROUND ANTENNA BASES, FRAMES, CABLE RACKS, AND OTHER METALLIC COMPONENTS WITH #2 INSULATED TINNED STRANDED COPPER GROUNDING CONDUCTORS AND CONNECT TO INSULATED SURFACE MOUNTED GROUND BARS. CONNECTION DETAILS SHALL FOLLOW MANUFACTURER'S SPECIFICATIONS FOR GROUNDING.
7. GROUND HYBRID CABLE SHIELD AT BOTH ENDS USING MANUFACTURER'S GUIDELINES.

ELECTRICAL AND GROUNDING NOTES

1. ALL ELECTRICAL WORK SHALL CONFORM TO THE REQUIREMENTS OF THE NATIONAL ELECTRICAL CODE (NEC) AS WELL AS APPLICABLE STATE AND LOCAL CODES.
2. ALL ELECTRICAL ITEMS SHALL BE U.L. APPROVED OR LISTED AND PROCURED PER SPECIFICATION REQUIREMENTS.
3. ELECTRICAL AND TELCO WIRING OUTSIDE A BUILDING AND EXPOSED TO WEATHER SHALL BE IN WATER TIGHT GALVANIZED RIGID STEEL CONDUITS OR SCHEDULE 80 PVC (AS PERMITTED BY CODE) AND WHERE REQUIRED IN LIQUID TIGHT FLEXIBLE METAL OR NONMETALLIC CONDUITS.
4. BURIED CONDUIT SHALL BE SCHEDULE 40 PVC.
5. ELECTRICAL WIRING SHALL BE COPPER WITH TYPE XHHW, THWN, OR THNN INSULATION.
6. RUN TELCO CONDUIT OR CABLE BETWEEN TELEPHONE UTILITY DEMARCATION POINT AND PROJECT OWNER CELL SITE TELCO CABINET AND BTS CABINET AS INDICATED ON THIS DRAWING PROVIDE FULL LENGTH PULL ROPE IN INSTALLED TELCO CONDUIT. PROVIDE GREENLEE CONDUIT MEASURING TAPE AT EACH END.
7. WHERE CONDUIT BETWEEN BTS AND PROJECT OWNER CELL SITE PPC AND BETWEEN BTS AND PROJECT OWNER CELL SITE TELCO SERVICE CABINET ARE UNDERGROUND USE PVC, SCHEDULE 40 CONDUIT. ABOVE THE GROUND PORTION OF THESE CONDUITS SHALL BE PVC CONDUIT.
8. ALL EQUIPMENT LOCATED OUTSIDE SHALL HAVE NEMA 3R ENCLOSURE.
9. GROUNDING SHALL COMPLY WITH NEC ART. 250.
10. GROUND HYBRID CABLE SHIELDS AT 3 LOCATIONS USING MANUFACTURER'S HYBRID CABLE GROUNDING KITS SUPPLIED BY PROJECT OWNER.
11. USE #2 COPPER STRANDED WIRE WITH GREEN COLOR INSULATION FOR ABOVE GRADE GROUNDING (UNLESS OTHERWISE SPECIFIED) AND #2 SOLID TINNED BARE COPPER WIRE FOR BELOW GRADE GROUNDING AS INDICATED ON THE DRAWING.
12. ALL GROUND CONNECTIONS TO BE BURNDY HYGROUND COMPRESSION TYPE CONNECTORS OR CADWELD EXOTHERMIC WELD. DO NOT ALLOW BARE COPPER WIRE TO BE IN CONTACT WITH GALVANIZED STEEL.
13. ROUTE GROUNDING CONDUCTORS ALONG THE SHORTEST AND STRAIGHTEST PATH POSSIBLE, EXCEPT AS OTHERWISE INDICATED. GROUNDING LEADS SHOULD NEVER BE BENT AT RIGHT ANGLE. ALWAYS MAKE AT LEAST 12" RADIUS BENDS. #2 WIRE CAN BE BENT AT 6" RADIUS WHEN NECESSARY. BOND ANY METAL OBJECTS WITHIN 6 FEET OF PROJECT OWNER EQUIPMENT OR CABINET TO MASTER GROUND BAR OR GROUNDING RING.
14. CONNECTIONS TO GROUND BARS SHALL BE MADE WITH TWO HOLE COMPRESSION TYPE COPPER LUGS. APPLY OXIDE INHIBITING COMPOUND TO ALL LOCATIONS.
15. APPLY OXIDE INHIBITING COMPOUND TO ALL COMPRESSION TYPE GROUND CONNECTIONS.
16. BOND ANTENNA MOUNTING BRACKETS, HYBRID CABLE GROUND KITS, AND RRHs TO EGB PLACED NEAR THE ANTENNA LOCATION.
17. BOND ANTENNA EGB'S AND MGB TO GROUND RING.
18. CONTRACTOR SHALL TEST COMPLETED GROUND SYSTEM AND RECORD RESULT FOR PROJECT CLOSE-OUT DOCUMENTATION. 5 OHMS MINIMUM RESISTANCE REQUIRED.
19. CONTRACTOR SHALL CONDUCT ANTENNA, HYBRID CABLES, GPS COAX AND RRH RETURN-LOSS AND DISTANCE- TO-FAULT MEASUREMENTS (SWEEP TESTS) AND RECORD RESULTS FOR PROJECT CLOSE OUT.
20. CONTRACTOR SHALL CHECK CAPACITY OF EXISTING SERVICE & PANEL ON SITE TO DETERMINE IF CAPACITY EXISTS TO ACCOMMODATE THE ADDED LOAD OF THIS PROJECT. ADVISE ENGINEER OF ANY DISCREPANCY.
21. LOCATION OF ALL OUTLET, BOXES, ETC, AND THE TYPE OF CONNECTION (PLUG OR DIRECT) SHALL BE CONFIRMED WITH THE OWNER'S REPRESENTATIVE PRIOR TO ROUGH-IN.
22. ELECTRICAL CHARACTERISTICS OF ALL EQUIPMENT (NEW AND EXISTING) SHALL BE FIELD VERIFIED WITH THE OWNERS REPRESENTATIVE AND EQUIPMENT SUPPLIER PRIOR TO ROUGH-IN OF CONDUIT AND WIRE. ALL EQUIPMENT SHALL BE PROPERLY CONNECTED ACCORDING TO THE NAMEPLATE DATA FURNISHED ON THE EQUIPMENT.

**Sprint**  
2.5 EQUIPMENT DEPLOYMENT  
6580 SPRINT PARKWAY  
OVERLAND PARK, KANSAS 66251

**CROWN CASTLE**

**TECTONIC** ENGINEERING & SURVEYING  
TECTONIC Engineering & Surveying Consultants P.C.  
1279 Route 300  
Newburgh, NY 12550  
Phone: (845) 567-6656  
Fax: (845) 567-8703  
www.tectonicengineering.com


THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF SPRINT COMMUNICATIONS, INC. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

SUBMITTALS

PROJECT NO: 7225.CT03XC008

NO	DATE	DESCRIPTION	BY
0	6/18/14	FOR COMMENT	DC
1	8/7/14	PER COMMENTS	MP
2	9/5/14	FOR CONSTRUCTION	MP

DATE	REVIEWED BY
9/5/14	JMO



SITE NUMBER:  
CT03XC008

SITE NAME:  
BEAUMONT FARM

SITE ADDRESS:  
945 EAST CENTER ST.  
WALLINGFORD, CT 06492

SHEET TITLE:  
GROUNDING DETAILS & NOTES

SHEET NO:  
E-2

Date: **June 11, 2014**

Holly Haas  
Crown Castle  
3530 Toringdon Way, Suite 300  
Charlotte, NC 28277



Crown Castle  
2000 Corporate Drive  
Canonsburg, PA 15317  
(724) 416-2149

**Subject: Structural Analysis Report**

<b>Carrier Designation:</b>	<b>Sprint PCS Co-Locate Carrier Site Number:</b>	Scenario 2.5B CT03XC008
<b>Crown Castle Designation:</b>	<b>Crown Castle BU Number: Crown Castle Site Name: Crown Castle JDE Job Number: Crown Castle Work Order Number: Crown Castle Application Number:</b>	876310 BEAUMONT FARM 288075 771943 245438 Rev. 1
<b>Engineering Firm Designation:</b>	<b>Crown Castle Project Number:</b>	771943
<b>Site Data:</b>	<b>945 East Center St., Wallingford, New Haven County, CT Latitude 41° 26' 37.36", Longitude -72° 47' 46.56" 147 Foot - Monopole Tower</b>	

Dear Holly Haas,

Crown Castle is pleased to submit this “**Structural Analysis Report**” to determine the structural integrity of the above mentioned tower. This analysis has been performed in accordance with the Crown Castle Structural ‘Statement of Work’ and the terms of Crown Castle Purchase Order Number 771943, in accordance with application 245438, revision 1.

The purpose of the analysis is to determine acceptability of the tower stress level. Based on our analysis we have determined the tower stress level for the structure and foundation, under the following load case, to be:

LC7: Existing + Reserved + Proposed Equipment **Sufficient Capacity**  
Note: See Table I and Table II for the proposed and existing/reserved loading, respectively.

This analysis has been performed in accordance with the TIA/EIA-222-F standard and 2005 CT State Building Code with 2009 amendment based upon a wind speed of 85 mph fastest mile.

All modifications and equipment proposed in this report shall be installed in accordance with the attached drawings for the determined available structural capacity to be effective.


We at *Crown Castle* appreciate the opportunity of providing our continuing professional services to you and Crown Castle. If you have any questions or need further assistance on this or any other projects please give us a call.

Structural analysis prepared by: Drew Skupien, E.I.T. / Truc Lac

Respectfully submitted by:

Jamal A. Huwel, P.E.  
Manager Engineering

A handwritten signature in black ink that reads 'Jamal A. Huwel'.



Date Signed: 06/11/2014



## TABLE OF CONTENTS

### 1) INTRODUCTION

### 2) ANALYSIS CRITERIA

Table 1 - Proposed Antenna and Cable Information

Table 2 - Existing and Reserved Antenna and Cable Information

Table 3 - Design Antenna and Cable Information

### 3) ANALYSIS PROCEDURE

Table 4 - Documents Provided

3.1) Analysis Method

3.2) Assumptions

### 4) ANALYSIS RESULTS

Table 5 - Section Capacity (Summary)

Table 6 – Tower Components vs. Capacity

4.1) Recommendations

### 5) APPENDIX A

tnxTower Output

### 6) APPENDIX B

Base Level Drawing

### 7) APPENDIX C

Additional Calculations

## 1) INTRODUCTION

This tower is a 147 ft Monopole tower designed by SUMMIT in June of 2006. The tower was originally designed for a wind speed of 90 mph per TIA/EIA-222-F.

## 2) ANALYSIS CRITERIA

The structural analysis was performed for this tower in accordance with the requirements of TIA/EIA-222-F Structural Standards for Steel Antenna Towers and Antenna Supporting Structures using a fastest mile wind speed of 85 mph with no ice, 37.6 mph with 0.75 inch ice thickness and 50 mph under service loads.

**Table 1 - Proposed Antenna and Cable Information**

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note
130.0	130.0	3	alcatel lucent	TD-RRH8x20-25	1	1-1/4	-
		3	rfs celwave	APXVTM14-C-120 w/ Mount Pipe			

**Table 2 - Existing and Reserved Antenna and Cable Information**

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note	
130.0	133.0	1	rfs celwave	APXVSPP18-C-A20 w/ Mount Pipe	3 6 3	1-1/4 5/16 1/2	1	
		1	andrew	VHLP1-23				
	132.0	1	andrew	VHLP2-23				
		1	andrew	VHLP2.5-23				
	130.0	130.0	3	alcatel lucent				1900MHz RRH (65MHz)
			3	alcatel lucent				800 EXTERNAL NOTCH FILTER
			3	alcatel lucent				800MHZ RRH
			9	rfs celwave				ACU-A20-N
			1	rfs celwave				APXV9ERR18-C-A20 w/ Mount Pipe
			1	rfs celwave				APXVSPP18-C-A20 w/ Mount Pipe
	128.0	128.0	1	tower mounts				Platform Mount [LP 712-1]
			3	argus technologies				LLPX310R w/ Mount Pipe
	121.0	121.0	3	samsung				FDD_R6_RRH
			3	antel				BXA-171063/12CF w/ Mount Pipe
2			antel	BXA-70063/6CFx2 w/ Mount Pipe				
1			antel	BXA-70063/6CFx4 w/ Mount Pipe				
3			commscope	HBX-6516DS-VTM w/ Mount Pipe				
		1	rfs celwave	DB-T1-6Z-8AB-0Z				

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note
		2	antel	LPA-80063/6CF w/ Mount Pipe	12	1-5/8	1
		4	antel	LPA-80080-6CF-EDIN w/ Mount Pipe			
		1	tower mounts	Platform Mount [LP 712-1]			
119.0	119.0	3	alcatel lucent	RRH2X40-AWS	-	-	2
		1	tower mounts	Side Arm Mount [SO 102-3]			
111.0	112.0	3	kmw communications	AM-X-CD-16-65-00T-RET w/ Mount Pipe	12 2 1	1-1/4 3/4 3/8	1
		6	powerwave technologies	7770.00 w/ Mount Pipe			
	111.0	6	ericsson	RRUS-11			
		12	powerwave technologies	LGP2140X			
		1	raycap	DC6-48-60-18-8F			
		1	tower mounts	Platform Mount [LP 712-1]			
80.0	81.0	1	kathrein	OG-860/1920/GPS-A	1	1/2	1
	80.0	1	tower mounts	Side Arm Mount [SO 701-1]			

Notes:

- 1) Existing Equipment
- 2) Reserved Equipment

**Table 3 - Design Antenna and Cable Information**

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
130	130	12	PCS	DB980H	-	-
110	110	12	generic	Panel Antenna (3.9 S.F. Each)	-	-
95	95	12	generic	Panel Antenna (3.9 S.F. Each)	-	-

### 3) ANALYSIS PROCEDURE

**Table 4 - Documents Provided**

Document	Remarks	Reference	Source
4-GEOTECHNICAL REPORTS	O'brien & Gere Engineers, Inc	1531484	CCISITES
4-TOWER FOUNDATION DRAWINGS/DESIGN/SPECS	Summit	1855118	CCISITES
4-TOWER MANUFACTURER DRAWINGS	Summit	1855980	CCISITES

#### 3.1) Analysis Method

tnxTower (version 6.1.4.1), a commercially available analysis software package, was used to create a three-dimensional model of the tower and calculate member stresses for various loading cases. Selected output from the analysis is included in Appendix A.

### 3.2) Assumptions

- 1) Tower and structures were built in accordance with the manufacturer's specifications.
- 2) The tower and structures have been maintained in accordance with the manufacturer's specification.
- 3) The configuration of antennas, transmission cables, mounts and other appurtenances are as specified in Tables 1 and 2 and the referenced drawings.
- 4) When applicable, transmission cables are considered as structural components for calculating wind loads as allowed by TIA/EIA-222-F.

This analysis may be affected if any assumptions are not valid or have been made in error. Crown Castle should be notified to determine the effect on the structural integrity of the tower.

### 4) ANALYSIS RESULTS

**Table 5 - Section Capacity (Summary)**

Section No.	Elevation (ft)	Component Type	Size	Critical Element	P (K)	SF*P_allow (K)	% Capacity	Pass / Fail
L1	147 - 133	Pole	TP12.75x12.75x0.1875	1	-0.30	207.15	5.6	Pass
L2	133 - 85.5	Pole	TP29.418x12.75x0.3125	2	-10.14	1453.73	81.1	Pass
L3	85.5 - 42.75	Pole	TP37.687x27.4771x0.375	3	-18.36	2276.76	99.9	Pass
L4	42.75 - 0	Pole	TP45.83x35.8941x0.4375	4	-31.27	3324.40	99.5	Pass
							Summary	
						Pole (L3)	99.9	Pass
						Rating =	99.9	Pass

**Table 6 - Tower Component Stresses vs. Capacity – LC7**

Notes	Component	Elevation (ft)	% Capacity	Pass / Fail
1	Anchor Rods	0	85.2	Pass
1	Base Plate	0	94.2	Pass
1	Base Foundation Soil Interaction	0	96.9	Pass

<b>Structure Rating (max from all components) =</b>	<b>99.9%</b>
---	--------------

Notes:


- 1) See additional documentation in "Appendix C – Additional Calculations" for calculations supporting the % capacity consumed.

### 4.1) Recommendations

The tower and its foundation have sufficient capacity to carry the existing, reserved, and proposed loads. No modifications are required at this time.

**APPENDIX A**  
**TNXTOWER OUTPUT**

Section	1	2	3	4	19.1
Length (ft)	14.00	47.50	46.50	47.50	47.50
Number of Sides	1	12	12	12	12
Thickness (in)	0.1875	0.3125	0.3750	0.4375	0.4375
Socket Length (ft)		3.75	4.75	35.8941	45.8300
Top Dia (in)	12.7500	12.7500	27.4771		
Bot Dia (in)	12.7500	29.4180	37.6870		
Grade	A53-B-35	A53-B-35	A572-65	A572-65	A572-65
Weight (K)	0.4	3.4	6.2	9.2	19.1

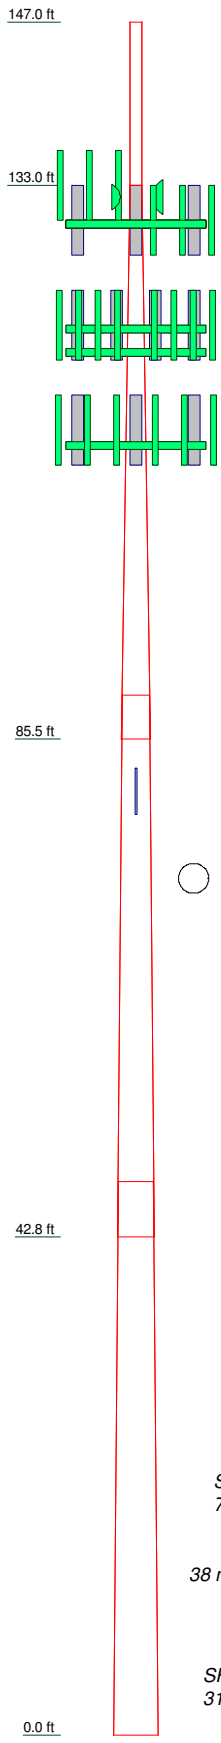

### DESIGNED APPURTENANCE LOADING


TYPE	ELEVATION	TYPE	ELEVATION
APXV9ERR18-C-A20	130	BXA-70063/6CFx2 w/ Mount Pipe	121
APXVSP18-C-A20	130	BXA-70063/6CFx2 w/ Mount Pipe	121
APXVSP18-C-A20	130	BXA-70063/6CFx4 w/ Mount Pipe	121
LLPX310R w/ Mount Pipe	130	DB-T1-6Z-8AB-0Z	121
LLPX310R w/ Mount Pipe	130	Platform Mount [LP 712-1]	121
LLPX310R w/ Mount Pipe	130	(2) LPA-80080-6CF-EDIN w/ Mount Pipe	121
FDD_R6_RRH	130	(2) LPA-80080-6CF-EDIN w/ Mount Pipe	121
FDD_R6_RRH	130	(2) LPA-80063/6CF w/ Mount Pipe	121
FDD_R6_RRH	130	Side Arm Mount [SO 102-3]	119
1900MHz RRH (65MHz)	130	3' x 2" Pipe Mount	119
1900MHz RRH (65MHz)	130	3' x 2" Pipe Mount	119
800 EXTERNAL NOTCH FILTER	130	3' x 2" Pipe Mount	119
800 EXTERNAL NOTCH FILTER	130	RRH2X40-AWS	119
800 EXTERNAL NOTCH FILTER	130	RRH2X40-AWS	119
800MHZ RRH	130	RRH2X40-AWS	119
800MHZ RRH	130	AM-X-CD-16-65-00T-RET w/ Mount Pipe	111
800MHZ RRH	130	AM-X-CD-16-65-00T-RET w/ Mount Pipe	111
(3) ACU-A20-N	130	AM-X-CD-16-65-00T-RET w/ Mount Pipe	111
(3) ACU-A20-N	130	AM-X-CD-16-65-00T-RET w/ Mount Pipe	111
(3) ACU-A20-N	130	AM-X-CD-16-65-00T-RET w/ Mount Pipe	111
APXVTM14-C-120 w/ Mount Pipe	130	(2) RRUUS-11	111
APXVTM14-C-120 w/ Mount Pipe	130	(2) RRUUS-11	111
APXVTM14-C-120 w/ Mount Pipe	130	(2) RRUUS-11	111
TD-RRH8x20-25	130	(4) LGP2140X	111
TD-RRH8x20-25	130	(4) LGP2140X	111
TD-RRH8x20-25	130	(4) LGP2140X	111
Platform Mount [LP 712-1]	130	DC6-48-60-18-8F	111
6' x 2" Mount Pipe	130	Platform Mount [LP 712-1]	111
6' x 2" Mount Pipe	130	(2) 4' x 2" Pipe Mount	111
6' x 2" Mount Pipe	130	(2) 4' x 2" Pipe Mount	111
VHLP1-23	130	(2) 4' x 2" Pipe Mount	111
VHLP2.5-23	130	(2) 7770.00	111
VHLP2-23	130	(2) 7770.00	111
BXA-171063/12CF w/ Mount Pipe	121	(2) 7770.00	111
BXA-171063/12CF w/ Mount Pipe	121	(2) 7770.00	111
BXA-171063/12CF w/ Mount Pipe	121	Side Arm Mount [SO 701-1]	80
HBX-6516DS-VTM w/ Mount Pipe	121	OG-860/1920/GPS-A	80
HBX-6516DS-VTM w/ Mount Pipe	121		
HBX-6516DS-VTM w/ Mount Pipe	121		

### MATERIAL STRENGTH

GRADE	Fy	Fu	GRADE	Fy	Fu
A53-B-35	35 ksi	63 ksi	A572-65	65 ksi	80 ksi

### TOWER DESIGN NOTES

1. Tower is located in New Haven County, Connecticut.
2. Tower designed for a 85 mph basic wind in accordance with the TIA/EIA-222-F Standard.
3. Tower is also designed for a 38 mph basic wind with 0.75 in ice. Ice is considered to increase in thickness with height.
4. Deflections are based upon a 50 mph wind.
5. TOWER RATING: 99.9%

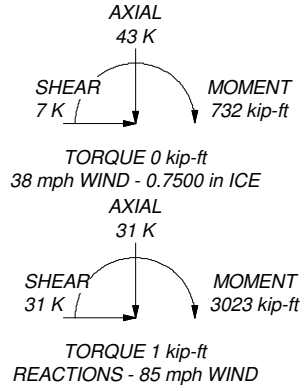

<p><b>Crown Castle</b> 2000 Corporate Drive Canonsburg, PA 15317 We Are Solutions Phone: (724) 416-2149 FAX: (724) 416-4594</p>	<b>Job: BU# 876310</b>		
	Project:		
	Client: Crown Castle	Drawn by: jskupien	App'd:
	Code: TIA/EIA-222-F	Date: 06/06/14	Scale: NTS
	Path: X:\ENG Work Area\DSkupien\876310 WO 771943\876310.er		
		Dwg No. E-1	

## Tower Input Data

There is a pole section.  
 This tower is designed using the TIA/EIA-222-F standard.  
 The following design criteria apply:

- 3) Tower is located in New Haven County, Connecticut.
- 4) Basic wind speed of 85 mph.
- 5) Nominal ice thickness of 0.7500 in.
- 6) Ice thickness is considered to increase with height.
- 7) Ice density of 56 pcf.
- 8) A wind speed of 38 mph is used in combination with ice.
- 9) Temperature drop of 50 °F.
- 10) Deflections calculated using a wind speed of 50 mph.
- 11) A non-linear (P-delta) analysis was used.
- 12) Pressures are calculated at each section.
- 13) Stress ratio used in pole design is 1.333.
- 14) Local bending stresses due to climbing loads, feed line supports, and appurtenance mounts are not considered.

## Options

- |  |  |  |
|--|--|--|
| Consider Moments - Legs<br>Consider Moments - Horizontals<br>Consider Moments - Diagonals<br>Use Moment Magnification<br>✓ Use Code Stress Ratios<br>✓ Use Code Safety Factors - Guys<br>✓ Escalate Ice<br>Always Use Max Kz<br>Use Special Wind Profile<br>Include Bolts In Member Capacity<br>Leg Bolts Are At Top Of Section<br>Secondary Horizontal Braces Leg<br>Use Diamond Inner Bracing (4 Sided)<br>Add IBC .6D+W Combination | Distribute Leg Loads As Uniform<br>Assume Legs Pinned<br>✓ Assume Rigid Index Plate<br>✓ Use Clear Spans For Wind Area<br>Use Clear Spans For KL/r<br>Retension Guys To Initial Tension<br>✓ Bypass Mast Stability Checks<br>✓ Use Azimuth Dish Coefficients<br>✓ Project Wind Area of Appurt.<br>Autocalc Torque Arm Areas<br>SR Members Have Cut Ends<br>✓ Sort Capacity Reports By Component<br>Triangulate Diamond Inner Bracing<br>Use TIA-222-G Tension Splice<br>Capacity Exemption | Treat Feedline Bundles As Cylinder<br>Use ASCE 10 X-Brace Ly Rules<br>Calculate Redundant Bracing Forces<br>Ignore Redundant Members in FEA<br>SR Leg Bolts Resist Compression<br>All Leg Panels Have Same Allowable<br>Offset Girt At Foundation<br>✓ Consider Feedline Torque<br>Include Angle Block Shear Check<br><div style="text-align: center; background-color: #e0e0e0; padding: 2px;">Poles</div> ✓ Include Shear-Torsion Interaction<br>Always Use Sub-Critical Flow<br>Use Top Mounted Sockets |
|--|--|--|

## Tapered Pole Section Geometry

Section	Elevation ft	Section Length ft	Splice Length ft	Number of Sides	Top Diameter in	Bottom Diameter in	Wall Thickness in	Bend Radius in	Pole Grade
L1	147.00-133.00	14.00	0.00	Round	12.7500	12.7500	0.1875		A53-B-35 (35 ksi)
L2	133.00-85.50	47.50	3.75	12	12.7500	29.4180	0.3125	1.2500	A572-65 (65 ksi)
L3	85.50-42.75	46.50	4.75	12	27.4771	37.6870	0.3750	1.5000	A572-65 (65 ksi)
L4	42.75-0.00	47.50		12	35.8941	45.8300	0.4375	1.7500	A572-65 (65 ksi)

## Tapered Pole Properties

Section	Tip Dia. in	Area in <sup>2</sup>	I in <sup>4</sup>	r in	C in	I/C in <sup>3</sup>	J in <sup>4</sup>	I/Q in <sup>2</sup>	w in	w/t
---------	----------------	-------------------------	----------------------	---------	---------	------------------------	----------------------	------------------------	---------	-----

Section	Tip Dia. in	Area in <sup>2</sup>	I in <sup>4</sup>	r in	C in	I/C in <sup>3</sup>	J in <sup>4</sup>	I/Q in <sup>2</sup>	w in	w/t
L1	12.7500	7.3999	146.0112	4.4420	6.3750	22.9037	292.0224	3.6978	0.0000	0
	12.7500	7.3999	146.0112	4.4420	6.3750	22.9037	292.0224	3.6978	0.0000	0
L2	13.1998	12.5152	247.1105	4.4526	6.6045	37.4155	500.7128	6.1596	2.5795	8.254
	30.4558	29.2874	3166.7738	10.4198	15.2385	207.8137	6416.7422	14.4144	7.0465	22.549
L3	29.2988	32.7258	3068.1895	9.7026	14.2331	215.5666	6216.9837	16.1066	6.3589	16.957
	39.0165	45.0542	8006.0570	13.3577	19.5219	410.1072	16222.4420	22.1743	9.0951	24.254
L4	38.1889	49.9494	8015.1092	12.6934	18.5931	431.0793	16240.7843	24.5836	8.4471	19.308
	47.4467	63.9467	16817.9163	16.2505	23.7399	708.4229	34077.6579	31.4726	11.1099	25.394

Tower Elevation	Gusset Area (per face)	Gusset Thickness	Gusset Grade	Adjust. Factor A <sub>r</sub>	Adjust. Factor A <sub>r</sub>	Weight Mult.	Double Angle Stitch Bolt Spacing Diagonals	Double Angle Stitch Bolt Spacing Horizontals
ft	ft <sup>2</sup>	in					in	in
L1 147.00-133.00				1	1	1		
L2 133.00-85.50				1	1	1		
L3 85.50-42.75				1	1	1		
L4 42.75-0.00				1	1	1		

**Feed Line/Linear Appurtenances - Entered As Round Or Flat**

Description	Face or Leg	Allow Shield	Component Type	Placement	Total Number	Number Per Row	Clear Spacing	Width or Diameter	Perimeter	Weight
				ft			in	r in	r in	plf
*										

**Feed Line/Linear Appurtenances - Entered As Area**

Description	Face or Leg	Allow Shield	Component Type	Placement	Total Number	C <sub>A</sub> A <sub>A</sub>	Weight
				ft		ft <sup>2</sup> /ft	plf
7983A(1/2")	C	No	Inside Pole	130.00 - 0.00	3	No Ice	0.08
						1/2" Ice	0.08
						1" Ice	0.08
						2" Ice	0.08
						4" Ice	0.08
9207(5/16")	C	No	Inside Pole	130.00 - 0.00	6	No Ice	0.60
						1/2" Ice	0.60
						1" Ice	0.60
						2" Ice	0.60
						4" Ice	0.60
HB114-1-0813U4-M5J(1 1/4")	C	No	Inside Pole	130.00 - 0.00	3	No Ice	1.20
						1/2" Ice	1.20
						1" Ice	1.20
						2" Ice	1.20
						4" Ice	1.20
2" Rigid Conduit	C	No	Inside Pole	130.00 - 0.00	1	No Ice	2.80
						1/2" Ice	2.80
						1" Ice	2.80
						2" Ice	2.80
						4" Ice	2.80
HB114-21U3M12-XXXF(1-1/4")	C	No	Inside Pole	130.00 - 0.00	1	No Ice	1.22
						1/2" Ice	1.22
						1" Ice	1.22
						2" Ice	1.22
						4" Ice	1.22



Description	Face or Leg	Allow Shield	Component Type	Placement ft	Total Number		C <sub>A</sub> A <sub>A</sub> ft <sup>2</sup> /ft	Weight plf
*								
FLC 158-50J(1-5/8")	A	No	Inside Pole	121.00 - 0.00	12	No Ice	0.00	0.92
						1/2" Ice	0.00	0.92
						1" Ice	0.00	0.92
						2" Ice	0.00	0.92
						4" Ice	0.00	0.92
HB158-1-08U8-S8J18(1-5/8)	A	No	CaAa (Out Of Face)	121.00 - 0.00	1	No Ice	0.20	1.30
						1/2" Ice	0.30	2.81
						1" Ice	0.40	4.94
						2" Ice	0.60	11.02
						4" Ice	1.00	30.52
*								
FLC 114-50J(1-1/4")	A	No	Inside Pole	111.00 - 0.00	12	No Ice	0.00	0.70
						1/2" Ice	0.00	0.70
						1" Ice	0.00	0.70
						2" Ice	0.00	0.70
						4" Ice	0.00	0.70
FB-L98B-002-75000(3/8")	A	No	Inside Pole	111.00 - 0.00	1	No Ice	0.00	0.06
						1/2" Ice	0.00	0.06
						1" Ice	0.00	0.06
						2" Ice	0.00	0.06
						4" Ice	0.00	0.06
WR-VG86ST-BRD(3/4)	A	No	Inside Pole	111.00 - 0.00	2	No Ice	0.00	0.59
						1/2" Ice	0.00	0.59
						1" Ice	0.00	0.59
						2" Ice	0.00	0.59
						4" Ice	0.00	0.59
2" Rigid Conduit	A	No	Inside Pole	111.00 - 0.00	2	No Ice	0.00	2.80
						1/2" Ice	0.00	2.80
						1" Ice	0.00	2.80
						2" Ice	0.00	2.80
						4" Ice	0.00	2.80
*								
LDF4-50A(1/2")	C	No	Inside Pole	80.00 - 0.00	1	No Ice	0.00	0.15
						1/2" Ice	0.00	0.15
						1" Ice	0.00	0.15
						2" Ice	0.00	0.15
						4" Ice	0.00	0.15
*								

### Feed Line/Linear Appurtenances Section Areas

Tower Section	Tower Elevation ft	Face	A <sub>R</sub> ft <sup>2</sup>	A <sub>F</sub> ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>	Weight K
L1	147.00-133.00	A	0.000	0.000	0.000	0.000	0.00
		B	0.000	0.000	0.000	0.000	0.00
		C	0.000	0.000	0.000	0.000	0.00
L2	133.00-85.50	A	0.000	0.000	0.000	7.029	0.83
		B	0.000	0.000	0.000	0.000	0.00
		C	0.000	0.000	0.000	0.000	0.51
L3	85.50-42.75	A	0.000	0.000	0.000	8.464	1.18
		B	0.000	0.000	0.000	0.000	0.00
		C	0.000	0.000	0.000	0.000	0.50
L4	42.75-0.00	A	0.000	0.000	0.000	8.464	1.18
		B	0.000	0.000	0.000	0.000	0.00
		C	0.000	0.000	0.000	0.000	0.50

### Feed Line/Linear Appurtenances Section Areas - With Ice

Tower Section	Tower Elevation ft	Face or Leg	Ice Thickness in	A <sub>R</sub> ft <sup>2</sup>	A <sub>F</sub> ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>	Weight K
---------------	-----------------------	-------------	---------------------	-----------------------------------	-----------------------------------	---	--	-------------

Tower Section	Tower Elevation ft	Face or Leg	Ice Thickness in	A <sub>R</sub> ft <sup>2</sup>	A <sub>F</sub> ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> In Face ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Out Face ft <sup>2</sup>	Weight K
L1	147.00-133.00	A	0.892	0.000	0.000	0.000	0.000	0.00
		B		0.000	0.000	0.000	0.000	0.00
		C		0.000	0.000	0.000	0.000	0.00
L2	133.00-85.50	A	0.863	0.000	0.000	0.000	13.158	0.94
		B		0.000	0.000	0.000	0.000	0.00
		C		0.000	0.000	0.000	0.000	0.51
L3	85.50-42.75	A	0.811	0.000	0.000	0.000	15.845	1.31
		B		0.000	0.000	0.000	0.000	0.00
		C		0.000	0.000	0.000	0.000	0.50
L4	42.75-0.00	A	0.750	0.000	0.000	0.000	15.403	1.30
		B		0.000	0.000	0.000	0.000	0.00
		C		0.000	0.000	0.000	0.000	0.50

### Feed Line Center of Pressure

Section	Elevation ft	CP <sub>X</sub> in	CP <sub>Z</sub> in	CP <sub>X</sub> Ice in	CP <sub>Z</sub> Ice in
L1	147.00-133.00	0.0000	0.0000	0.0000	0.0000
L2	133.00-85.50	0.0000	-0.2252	0.0000	-0.3687
L3	85.50-42.75	0.0000	-0.2770	0.0000	-0.4683
L4	42.75-0.00	0.0000	-0.2809	0.0000	-0.4725

### Discrete Tower Loads

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustmen t °	Placement ft	C <sub>A</sub> A <sub>A</sub> Front ft <sup>2</sup>	C <sub>A</sub> A <sub>A</sub> Side ft <sup>2</sup>	Weight K	
APXV9ERR18-C-A20	A	From Leg	4.00 0.00 0.00	0.0000	130.00	No Ice	8.26	5.81	0.06
						1/2" Ice	8.81	6.27	0.11
						Ice	9.36	6.73	0.17
						1" Ice	10.50	7.68	0.31
						2" Ice	12.88	9.95	0.66
						4" Ice			
APXVSP18-C-A20	B	From Leg	4.00 0.00 0.00	0.0000	130.00	No Ice	8.26	5.28	0.06
						1/2" Ice	8.81	5.74	0.11
						Ice	9.36	6.20	0.16
						1" Ice	10.50	7.14	0.29
						2" Ice	12.88	9.27	0.63
						4" Ice			
APXVSP18-C-A20	C	From Leg	4.00 0.00 3.00	0.0000	130.00	No Ice	8.26	5.28	0.06
						1/2" Ice	8.81	5.74	0.11
						Ice	9.36	6.20	0.16
						1" Ice	10.50	7.14	0.29
						2" Ice	12.88	9.27	0.63
						4" Ice			
LLPX310R w/ Mount Pipe	A	From Leg	4.00 0.00 -2.00	0.0000	130.00	No Ice	5.07	2.98	0.05
						1/2" Ice	5.48	3.53	0.08
						Ice	5.91	4.09	0.13
						1" Ice	6.79	5.31	0.23
						2" Ice	8.70	8.13	0.54
						4" Ice			
LLPX310R w/ Mount Pipe	B	From Leg	4.00 0.00 -2.00	0.0000	130.00	No Ice	5.07	2.98	0.05
						1/2" Ice	5.48	3.53	0.08
						Ice	5.91	4.09	0.13
						1" Ice	6.79	5.31	0.23
						2" Ice	8.70	8.13	0.54
						4" Ice			

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C <sub>AA</sub> Front	C <sub>AA</sub> Side	Weight
			Horz	Lateral					
LLPX310R w/ Mount Pipe	C	From Leg	4.00	0.0000	130.00	4" Ice			
						No Ice	5.07	2.98	0.05
						1/2"	5.48	3.53	0.08
						Ice	5.91	4.09	0.13
						1" Ice	6.79	5.31	0.23
FDD_R6_RRH	A	From Leg	4.00	0.0000	130.00	2" Ice	8.70	8.13	0.54
						4" Ice			
						No Ice	1.79	0.78	0.03
						1/2"	1.97	0.92	0.04
						Ice	2.16	1.07	0.06
FDD_R6_RRH	B	From Leg	4.00	0.0000	130.00	1" Ice	2.57	1.39	0.09
						2" Ice	3.49	2.14	0.20
						4" Ice			
						No Ice	1.79	0.78	0.03
						1/2"	1.97	0.92	0.04
FDD_R6_RRH	C	From Leg	4.00	0.0000	130.00	Ice	2.16	1.07	0.06
						1" Ice	2.57	1.39	0.09
						2" Ice	3.49	2.14	0.20
						4" Ice			
						No Ice	1.79	0.78	0.03
1900MHz RRH (65MHz)	A	From Leg	4.00	0.0000	130.00	1/2"	1.97	0.92	0.04
						Ice	2.16	1.07	0.06
						1" Ice	2.57	1.39	0.09
						2" Ice	3.49	2.14	0.20
						4" Ice			
1900MHz RRH (65MHz)	B	From Leg	4.00	0.0000	130.00	No Ice	2.70	2.77	0.06
						1/2"	2.94	3.01	0.08
						Ice	3.18	3.26	0.11
						1" Ice	3.70	3.78	0.18
						2" Ice	4.85	4.93	0.35
1900MHz RRH (65MHz)	C	From Leg	4.00	0.0000	130.00	4" Ice			
						No Ice	2.70	2.77	0.06
						1/2"	2.94	3.01	0.08
						Ice	3.18	3.26	0.11
						1" Ice	3.70	3.78	0.18
800 EXTERNAL NOTCH FILTER	A	From Leg	4.00	0.0000	130.00	2" Ice	4.85	4.93	0.35
						4" Ice			
						No Ice	0.77	0.37	0.01
						1/2"	0.89	0.46	0.02
						Ice	1.02	0.56	0.02
800 EXTERNAL NOTCH FILTER	B	From Leg	4.00	0.0000	130.00	1" Ice	1.30	0.79	0.04
						2" Ice	1.97	1.34	0.11
						4" Ice			
						No Ice	0.77	0.37	0.01
						1/2"	0.89	0.46	0.02
800 EXTERNAL NOTCH FILTER	C	From Leg	4.00	0.0000	130.00	Ice	1.02	0.56	0.02
						1" Ice	1.30	0.79	0.04
						2" Ice	1.97	1.34	0.11
						4" Ice			
						No Ice	0.77	0.37	0.01
800MHZ RRH	A	From Leg	4.00	0.0000	130.00	1/2"	0.89	0.46	0.02
						Ice	1.02	0.56	0.02
						1" Ice	1.30	0.79	0.04
						2" Ice	1.97	1.34	0.11
						4" Ice			
800MHZ RRH	A	From Leg	4.00	0.0000	130.00	No Ice	2.49	2.07	0.05
						1/2"	2.71	2.27	0.07
						Ice	2.93	2.48	0.10
						1" Ice	3.41	2.93	0.16

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C <sub>AA</sub> Front	C <sub>AA</sub> Side	Weight	
			Horz	Lateral						Vert
			ft	ft	°	ft	ft <sup>2</sup>	ft <sup>2</sup>	K	
800MHZ RRH	B	From Leg	4.00	0.00	0.0000	130.00	2" Ice	4.46	3.93	0.32
							4" Ice			
							No Ice	2.49	2.07	0.05
							1/2" Ice	2.71	2.27	0.07
							1" Ice	2.93	2.48	0.10
800MHZ RRH	C	From Leg	4.00	0.00	0.0000	130.00	2" Ice	4.46	3.93	0.32
							4" Ice			
							No Ice	2.49	2.07	0.05
							1/2" Ice	2.71	2.27	0.07
							1" Ice	2.93	2.48	0.10
(3) ACU-A20-N	A	From Leg	4.00	0.00	0.0000	130.00	1" Ice	3.41	2.93	0.16
							2" Ice	4.46	3.93	0.32
							4" Ice			
							No Ice	0.08	0.14	0.00
							1/2" Ice	0.12	0.19	0.00
(3) ACU-A20-N	B	From Leg	4.00	0.00	0.0000	130.00	Ice	0.17	0.25	0.00
							1" Ice	0.30	0.40	0.01
							2" Ice	0.67	0.80	0.04
							4" Ice			
							No Ice	0.08	0.14	0.00
(3) ACU-A20-N	C	From Leg	4.00	0.00	0.0000	130.00	1/2" Ice	0.12	0.19	0.00
							Ice	0.17	0.25	0.00
							1" Ice	0.30	0.40	0.01
							2" Ice	0.67	0.80	0.04
							4" Ice			
APXVTM14-C-120 w/ Mount Pipe	A	From Leg	4.00	0.00	0.0000	130.00	No Ice	7.13	4.96	0.07
							1/2" Ice	7.66	5.75	0.13
							Ice	8.18	6.47	0.19
							1" Ice	9.26	8.01	0.34
							2" Ice	11.53	11.41	0.75
APXVTM14-C-120 w/ Mount Pipe	B	From Leg	4.00	0.00	0.0000	130.00	4" Ice			
							No Ice	7.13	4.96	0.07
							1/2" Ice	7.66	5.75	0.13
							Ice	8.18	6.47	0.19
							1" Ice	9.26	8.01	0.34
APXVTM14-C-120 w/ Mount Pipe	C	From Leg	4.00	0.00	0.0000	130.00	2" Ice	11.53	11.41	0.75
							4" Ice			
							No Ice	7.13	4.96	0.07
							1/2" Ice	7.66	5.75	0.13
							Ice	8.18	6.47	0.19
TD-RRH8x20-25	A	From Leg	4.00	0.00	0.0000	130.00	1" Ice	9.26	8.01	0.34
							2" Ice	11.53	11.41	0.75
							4" Ice			
							No Ice	4.72	1.70	0.07
							1/2" Ice	5.01	1.92	0.10
TD-RRH8x20-25	B	From Leg	4.00	0.00	0.0000	130.00	Ice	5.32	2.15	0.13
							1" Ice	5.95	2.62	0.20
							2" Ice	7.31	3.68	0.40
							4" Ice			
							No Ice	4.72	1.70	0.07
TD-RRH8x20-25	C	From Leg	4.00	0.00	0.0000	130.00	1/2" Ice	5.01	1.92	0.10
							Ice	5.32	2.15	0.13

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustment °	Placement ft		C <sub>AA</sub> Front ft <sup>2</sup>	C <sub>AA</sub> Side ft <sup>2</sup>	Weight K
						1" Ice	5.95	2.62	0.20
						2" Ice	7.31	3.68	0.40
						4" Ice			
Platform Mount [LP 712-1]	C	None		0.0000	130.00	No Ice	24.53	24.53	1.34
						1/2" Ice	29.94	29.94	1.65
						1" Ice	35.35	35.35	1.96
						2" Ice	46.17	46.17	2.58
						4" Ice	67.81	67.81	3.82
6' x 2" Mount Pipe	A	From Leg	4.00 0.00 0.00	0.0000	130.00	No Ice	0.00	1.43	0.02
						1/2" Ice	0.00	1.92	0.03
						1" Ice	0.00	2.29	0.05
						2" Ice	0.00	3.06	0.09
						4" Ice	0.00	4.70	0.23
6' x 2" Mount Pipe	B	From Leg	4.00 0.00 0.00	0.0000	130.00	No Ice	0.00	1.43	0.02
						1/2" Ice	0.00	1.92	0.03
						1" Ice	0.00	2.29	0.05
						2" Ice	0.00	3.06	0.09
						4" Ice	0.00	4.70	0.23
6' x 2" Mount Pipe	C	From Leg	4.00 0.00 0.00	0.0000	130.00	No Ice	0.00	1.43	0.02
						1/2" Ice	0.00	1.92	0.03
						1" Ice	0.00	2.29	0.05
						2" Ice	0.00	3.06	0.09
						4" Ice	0.00	4.70	0.23
***									
(2) LPA-80080-6CF-EDIN w/ Mount Pipe	A	From Leg	4.00 0.00 0.00	0.0000	121.00	No Ice	4.56	10.74	0.05
						1/2" Ice	5.10	12.00	0.11
						1" Ice	5.61	12.98	0.19
						2" Ice	6.65	14.99	0.36
						4" Ice	8.83	19.23	0.86
(2) LPA-80080-6CF-EDIN w/ Mount Pipe	B	From Leg	4.00 0.00 0.00	0.0000	121.00	No Ice	4.56	10.74	0.05
						1/2" Ice	5.10	12.00	0.11
						1" Ice	5.61	12.98	0.19
						2" Ice	6.65	14.99	0.36
						4" Ice	8.83	19.23	0.86
(2) LPA-80063/6CF w/ Mount Pipe	C	From Leg	4.00 0.00 0.00	0.0000	121.00	No Ice	10.58	10.67	0.05
						1/2" Ice	11.24	11.93	0.14
						1" Ice	11.87	12.91	0.25
						2" Ice	13.16	14.92	0.48
						4" Ice	15.87	19.16	1.09
BXA-171063/12CF w/ Mount Pipe	A	From Leg	4.00 0.00 0.00	0.0000	121.00	No Ice	5.03	5.29	0.04
						1/2" Ice	5.58	6.46	0.09
						1" Ice	6.10	7.35	0.14
						2" Ice	7.17	9.15	0.27
						4" Ice	9.44	12.95	0.68
BXA-171063/12CF w/ Mount Pipe	B	From Leg	4.00 0.00 0.00	0.0000	121.00	No Ice	5.03	5.29	0.04
						1/2" Ice	5.58	6.46	0.09
						1" Ice	6.10	7.35	0.14
						2" Ice	7.17	9.15	0.27
						4" Ice	9.44	12.95	0.68
BXA-171063/12CF w/ Mount Pipe	C	From Leg	4.00 0.00 0.00	0.0000	121.00	No Ice	5.03	5.29	0.04
						1/2" Ice	5.58	6.46	0.09
						1" Ice	6.10	7.35	0.14
						2" Ice	7.17	9.15	0.27
						4" Ice	9.44	12.95	0.68
HBX-6516DS-VTM w/	A	From Leg	4.00	0.0000	121.00	No Ice	3.56	3.24	0.03

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C <sub>AA</sub> <sub>Front</sub>	C <sub>AA</sub> <sub>Side</sub>	Weight	
			Horz	Lateral						ft
			ft	ft	°	ft	ft <sup>2</sup>	ft <sup>2</sup>	K	
Mount Pipe			0.00			1/2"	3.96	3.91	0.06	
			0.00			Ice	4.38	4.56	0.10	
						1" Ice	5.32	5.91	0.20	
						2" Ice	7.31	8.88	0.50	
						4" Ice				
HBX-6516DS-VTM w/ Mount Pipe	B	From Leg	4.00		0.0000	121.00	No Ice	3.56	3.24	0.03
			0.00				1/2"	3.96	3.91	0.06
			0.00				Ice	4.38	4.56	0.10
							1" Ice	5.32	5.91	0.20
							2" Ice	7.31	8.88	0.50
HBX-6516DS-VTM w/ Mount Pipe	C	From Leg	4.00		0.0000	121.00	No Ice	3.56	3.24	0.03
			0.00				1/2"	3.96	3.91	0.06
			0.00				Ice	4.38	4.56	0.10
							1" Ice	5.32	5.91	0.20
							2" Ice	7.31	8.88	0.50
BXA-70063/6CFx2 w/ Mount Pipe	A	From Leg	4.00		0.0000	121.00	No Ice	7.97	5.40	0.04
			0.00				1/2"	8.61	6.55	0.10
			0.00				Ice	9.22	7.41	0.17
							1" Ice	10.46	9.18	0.33
							2" Ice	13.07	12.93	0.79
BXA-70063/6CFx2 w/ Mount Pipe	B	From Leg	4.00		0.0000	121.00	No Ice	7.97	5.40	0.04
			0.00				1/2"	8.61	6.55	0.10
			0.00				Ice	9.22	7.41	0.17
							1" Ice	10.46	9.18	0.33
							2" Ice	13.07	12.93	0.79
BXA-70063/6CFx4 w/ Mount Pipe	C	From Leg	4.00		0.0000	121.00	No Ice	7.97	5.40	0.04
			0.00				1/2"	8.61	6.55	0.10
			0.00				Ice	9.22	7.41	0.17
							1" Ice	10.46	9.18	0.33
							2" Ice	13.07	12.93	0.79
DB-T1-6Z-8AB-0Z	C	From Leg	4.00		0.0000	121.00	No Ice	5.60	2.33	0.04
			0.00				1/2"	5.92	2.56	0.08
			0.00				Ice	6.24	2.79	0.12
							1" Ice	6.91	3.28	0.21
							2" Ice	8.37	4.37	0.45
Platform Mount [LP 712-1]	C	None			0.0000	121.00	No Ice	24.53	24.53	1.34
							1/2"	29.94	29.94	1.65
							Ice	35.35	35.35	1.96
							1" Ice	46.17	46.17	2.58
							2" Ice	67.81	67.81	3.82
* RRH2X40-AWS	A	From Leg	2.00		0.0000	119.00	No Ice	2.52	1.59	0.04
			0.00				1/2"	2.75	1.80	0.06
			0.00				Ice	2.99	2.01	0.08
							1" Ice	3.50	2.46	0.13
							2" Ice	4.61	3.48	0.28
RRH2X40-AWS	B	From Leg	2.00		0.0000	119.00	No Ice	2.52	1.59	0.04
			0.00				1/2"	2.75	1.80	0.06
			0.00				Ice	2.99	2.01	0.08
							1" Ice	3.50	2.46	0.13
							2" Ice	4.61	3.48	0.28
RRH2X40-AWS	C	From Leg	2.00		0.0000	119.00	No Ice	2.52	1.59	0.04
			0.00				1/2"	2.75	1.80	0.06
			0.00				Ice	2.99	2.01	0.08
							1" Ice	3.50	2.46	0.13
							2" Ice	4.61	3.48	0.28

Description	Face or Leg	Offset Type	Offsets:			Azimuth Adjustment	Placement	C <sub>A</sub> A <sub>A</sub> Front	C <sub>A</sub> A <sub>A</sub> Side	Weight
			Horz	Lateral	Vert					
			ft	ft	ft	°	ft	ft <sup>2</sup>	ft <sup>2</sup>	K
Side Arm Mount [SO 102-3]	C	None			0.0000	119.00	4" Ice			
							No Ice	3.00	3.00	0.08
							1/2"	3.48	3.48	0.11
							Ice	3.96	3.96	0.14
							1" Ice	4.92	4.92	0.20
3' x 2" Pipe Mount	A	From Leg	2.00	0.00	0.0000	119.00	2" Ice	6.84	6.84	0.32
							4" Ice			
							No Ice	0.58	0.58	0.01
							1/2"	0.77	0.77	0.02
							Ice	0.97	0.97	0.02
3' x 2" Pipe Mount	B	From Leg	2.00	0.00	0.0000	119.00	1" Ice	1.42	1.42	0.05
							2" Ice	2.54	2.54	0.13
							4" Ice			
							No Ice	0.58	0.58	0.01
							1/2"	0.77	0.77	0.02
3' x 2" Pipe Mount	C	From Leg	2.00	0.00	0.0000	119.00	Ice	0.97	0.97	0.02
							1" Ice	1.42	1.42	0.05
							2" Ice	2.54	2.54	0.13
							4" Ice			
							No Ice	0.58	0.58	0.01
*** (2) 7770.00	A	From Leg	4.00	0.00	0.0000	111.00	1/2"	6.31	3.27	0.07
							Ice	6.75	3.63	0.11
							1" Ice	7.66	4.35	0.20
							2" Ice	9.58	6.06	0.44
							4" Ice			
(2) 7770.00	B	From Leg	4.00	0.00	0.0000	111.00	No Ice	5.88	2.93	0.04
							1/2"	6.31	3.27	0.07
							Ice	6.75	3.63	0.11
							1" Ice	7.66	4.35	0.20
							2" Ice	9.58	6.06	0.44
(2) 7770.00	C	From Leg	4.00	0.00	0.0000	111.00	4" Ice			
							No Ice	5.88	2.93	0.04
							1/2"	6.31	3.27	0.07
							Ice	6.75	3.63	0.11
							1" Ice	7.66	4.35	0.20
AM-X-CD-16-65-00T-RET w/ Mount Pipe	A	From Leg	4.00	0.00	0.0000	111.00	2" Ice	9.58	6.06	0.44
							4" Ice			
							No Ice	8.50	6.30	0.07
							1/2"	9.15	7.48	0.14
							Ice	9.77	8.37	0.21
AM-X-CD-16-65-00T-RET w/ Mount Pipe	B	From Leg	4.00	0.00	0.0000	111.00	1" Ice	11.03	10.18	0.38
							2" Ice	13.68	14.02	0.87
							4" Ice			
							No Ice	8.50	6.30	0.07
							1/2"	9.15	7.48	0.14
AM-X-CD-16-65-00T-RET w/ Mount Pipe	C	From Leg	4.00	0.00	0.0000	111.00	Ice	9.77	8.37	0.21
							1" Ice	11.03	10.18	0.38
							2" Ice	13.68	14.02	0.87
							4" Ice			
							No Ice	8.50	6.30	0.07
(2) RRUS-11	A	From Leg	4.00	0.00	0.0000	111.00	1/2"	9.15	7.48	0.14
							Ice	9.77	8.37	0.21
							1" Ice	11.03	10.18	0.38
							2" Ice	13.68	14.02	0.87
(2) RRUS-11	A	From Leg	4.00	0.00	0.0000	111.00	4" Ice			
							No Ice	3.25	1.37	0.05
							1/2"	3.49	1.55	0.07
(2) RRUS-11	A	From Leg	4.00	0.00	0.0000	111.00	Ice	3.74	1.74	0.09

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C <sub>AA</sub> <sub>Front</sub>	C <sub>AA</sub> <sub>Side</sub>	Weight	
			Horz	Lateral						Vert
			ft	ft	°	ft	ft <sup>2</sup>	ft <sup>2</sup>	K	
(2) RRUS-11	B	From Leg	4.00	0.00	0.0000	111.00	1" Ice	4.27	2.14	0.15
							2" Ice	5.43	3.04	0.31
							4" Ice			
							No Ice	3.25	1.37	0.05
							1/2" Ice	3.49	1.55	0.07
							1" Ice	3.74	1.74	0.09
							2" Ice	4.27	2.14	0.15
(2) RRUS-11	C	From Leg	4.00	0.00	0.0000	111.00	2" Ice	5.43	3.04	0.31
							4" Ice			
							No Ice	3.25	1.37	0.05
							1/2" Ice	3.49	1.55	0.07
							Ice	3.74	1.74	0.09
							1" Ice	4.27	2.14	0.15
							2" Ice	5.43	3.04	0.31
(4) LGP2140X	A	From Leg	4.00	0.00	0.0000	111.00	4" Ice			
							No Ice	1.26	0.38	0.02
							1/2" Ice	1.42	0.49	0.03
							Ice	1.58	0.62	0.04
							1" Ice	1.94	0.89	0.06
							2" Ice	2.75	1.54	0.14
							4" Ice			
(4) LGP2140X	B	From Leg	4.00	0.00	0.0000	111.00	No Ice	1.26	0.38	0.02
							1/2" Ice	1.42	0.49	0.03
							Ice	1.58	0.62	0.04
							1" Ice	1.94	0.89	0.06
							2" Ice	2.75	1.54	0.14
							4" Ice			
							No Ice	1.26	0.38	0.02
(4) LGP2140X	C	From Leg	4.00	0.00	0.0000	111.00	1/2" Ice	1.42	0.49	0.03
							Ice	1.58	0.62	0.04
							1" Ice	1.94	0.89	0.06
							2" Ice	2.75	1.54	0.14
							4" Ice			
							No Ice	1.26	0.38	0.02
							1/2" Ice	1.42	0.49	0.03
DC6-48-60-18-8F	A	From Leg	4.00	0.00	0.0000	111.00	Ice	1.66	1.66	0.05
							1" Ice	2.09	2.09	0.10
							2" Ice	3.10	3.10	0.21
							4" Ice			
							No Ice	1.27	1.27	0.02
							1/2" Ice	1.46	1.46	0.04
							Ice	1.66	1.66	0.05
Platform Mount [LP 712-1]	C	None			0.0000	111.00	4" Ice			
							No Ice	24.53	24.53	1.34
							1/2" Ice	29.94	29.94	1.65
							Ice	35.35	35.35	1.96
							1" Ice	46.17	46.17	2.58
							2" Ice	67.81	67.81	3.82
							4" Ice			
(2) 4' x 2" Pipe Mount	A	From Leg	4.00	0.00	0.0000	111.00	No Ice	0.00	0.79	0.03
							1/2" Ice	0.00	1.03	0.04
							Ice	0.00	1.28	0.04
							1" Ice	0.00	1.81	0.07
							2" Ice	0.00	3.11	0.17
							4" Ice			
							No Ice	0.00	0.79	0.03
(2) 4' x 2" Pipe Mount	B	From Leg	4.00	0.00	0.0000	111.00	1/2" Ice	0.00	1.03	0.04
							Ice	0.00	1.28	0.04
							1" Ice	0.00	1.81	0.07
							2" Ice	0.00	3.11	0.17
							4" Ice			
							No Ice	0.00	0.79	0.03
							1/2" Ice	0.00	1.03	0.04
(2) 4' x 2" Pipe Mount	C	From Leg	4.00	0.00	0.0000	111.00	Ice	0.00	1.28	0.04
							1" Ice	0.00	1.81	0.07
							2" Ice	0.00	3.11	0.17
							4" Ice			
							No Ice	0.00	0.79	0.03
							1/2" Ice	0.00	1.03	0.04
							Ice	0.00	1.28	0.04
***										
OG-860/1920/GPS-A	A	From Leg	2.00		0.0000	80.00	No Ice	0.33	0.40	0.00



Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C <sub>A</sub> A <sub>Front</sub>	C <sub>A</sub> A <sub>Side</sub>	Weight	
			Horz	Lateral						
			ft	ft	°	ft	ft <sup>2</sup>	ft <sup>2</sup>	K	
			0.00			1/2"	0.43	0.51	0.01	
			1.00			Ice	0.55	0.63	0.01	
						1" Ice	0.80	0.89	0.03	
						2" Ice	1.41	1.52	0.08	
						4" Ice				
Side Arm Mount [SO 701-1]	A	None			0.0000	80.00	No Ice	0.85	1.67	0.07
						1/2"	1.14	2.34	0.08	
						Ice	1.43	3.01	0.09	
						1" Ice	2.01	4.35	0.12	
						2" Ice	3.17	7.03	0.18	
						4" Ice				

\*

### Dishes

Description	Face or Leg	Dish Type	Offset Type	Offsets:		Azimuth Adjustment	3 dB Beam Width	Elevation	Outside Diameter	Aperture Area	Weight	
				Horz	Lateral							
				ft	ft	°	°	ft	ft	ft <sup>2</sup>	K	
VHLP1-23	C	Paraboloid w/o Radome	From Leg	1.00		0.0000		130.00	1.27	No Ice	1.28	0.01
				0.00						1/2" Ice	1.45	0.02
				2.00						1" Ice	1.62	0.02
										2" Ice	1.97	0.04
										4" Ice	2.66	0.07
VHLP2.5-23	B	Paraboloid w/o Radome	From Leg	1.00		0.0000		130.00	2.92	No Ice	6.68	0.05
				0.00						1/2" Ice	7.07	0.08
				2.00						1" Ice	7.46	0.12
										2" Ice	8.23	0.19
										4" Ice	9.78	0.34
VHLP2-23	C	Paraboloid w/o Radome	From Leg	1.00		0.0000		130.00	2.17	No Ice	3.72	0.03
				0.00						1/2" Ice	4.00	0.03
				2.00						1" Ice	4.31	0.04
										2" Ice	4.94	0.07
										4" Ice	6.34	0.19

### Load Combinations

Comb. No.	Description
1	Dead Only
2	Dead+Wind 0 deg - No Ice
3	Dead+Wind 30 deg - No Ice
4	Dead+Wind 60 deg - No Ice
5	Dead+Wind 90 deg - No Ice
6	Dead+Wind 120 deg - No Ice
7	Dead+Wind 150 deg - No Ice
8	Dead+Wind 180 deg - No Ice
9	Dead+Wind 210 deg - No Ice
10	Dead+Wind 240 deg - No Ice
11	Dead+Wind 270 deg - No Ice
12	Dead+Wind 300 deg - No Ice
13	Dead+Wind 330 deg - No Ice
14	Dead+Ice+Temp
15	Dead+Wind 0 deg+Ice+Temp
16	Dead+Wind 30 deg+Ice+Temp

Comb. No.	Description
17	Dead+Wind 60 deg+Ice+Temp
18	Dead+Wind 90 deg+Ice+Temp
19	Dead+Wind 120 deg+Ice+Temp
20	Dead+Wind 150 deg+Ice+Temp
21	Dead+Wind 180 deg+Ice+Temp
22	Dead+Wind 210 deg+Ice+Temp
23	Dead+Wind 240 deg+Ice+Temp
24	Dead+Wind 270 deg+Ice+Temp
25	Dead+Wind 300 deg+Ice+Temp
26	Dead+Wind 330 deg+Ice+Temp
27	Dead+Wind 0 deg - Service
28	Dead+Wind 30 deg - Service
29	Dead+Wind 60 deg - Service
30	Dead+Wind 90 deg - Service
31	Dead+Wind 120 deg - Service
32	Dead+Wind 150 deg - Service
33	Dead+Wind 180 deg - Service
34	Dead+Wind 210 deg - Service
35	Dead+Wind 240 deg - Service
36	Dead+Wind 270 deg - Service
37	Dead+Wind 300 deg - Service
38	Dead+Wind 330 deg - Service

### Maximum Member Forces

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Force K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L1	147 - 133	Pole	Max Tension	11	0.00	-0.00	0.00
			Max. Compression	14	-0.56	0.00	-0.00
			Max. Mx	11	-0.30	3.19	0.00
			Max. My	2	-0.30	-0.00	3.18
			Max. Vy	11	-0.46	3.19	0.00
			Max. Vx	2	-0.45	-0.00	3.18
L2	133 - 85.5	Pole	Max. Torque	10			0.00
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	14	-19.56	0.83	-0.23
			Max. Mx	11	-10.16	655.65	0.34
			Max. My	2	-10.24	-5.59	640.38
			Max. Vy	11	-21.52	655.65	0.34
L3	85.5 - 42.75	Pole	Max. Vx	2	-21.07	-5.59	640.38
			Max. Torque	13			0.64
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	14	-28.70	0.83	0.04
			Max. Mx	11	-18.37	1652.53	-2.35
			Max. My	2	-18.41	-14.33	1618.65
L4	42.75 - 0	Pole	Max. Vy	11	-26.16	1652.53	-2.35
			Max. Vx	2	-25.71	-14.33	1618.65
			Max. Torque	10			-0.49
			Max Tension	1	0.00	0.00	0.00
			Max. Compression	14	-42.67	0.83	0.38
			Max. Mx	11	-31.27	3008.45	-5.38
	2	-31.27	-24.09	2953.79			
	11	-30.93	3008.45	-5.38			
	2	-30.50	-24.09	2953.79			
	10			-0.60			

### Maximum Reactions

Location	Condition	Gov. Load Comb.	Vertical K	Horizontal, X K	Horizontal, Z K
Pole	Max. Vert	23	42.67	6.26	-3.51

Location	Condition	Gov. Load Comb.	Vertical K	Horizontal, X K	Horizontal, Z K
	Max. H <sub>x</sub>	11	31.30	30.90	-0.06
	Max. H <sub>z</sub>	2	31.30	-0.20	30.47
	Max. M <sub>x</sub>	2	2953.79	-0.20	30.47
	Max. M <sub>z</sub>	5	3003.17	-30.86	0.48
	Max. Torsion	2	0.43	-0.20	30.47
	Min. Vert	1	31.30	0.00	0.00
	Min. H <sub>x</sub>	5	31.30	-30.86	0.48
	Min. H <sub>z</sub>	8	31.30	0.29	-30.24
	Min. M <sub>x</sub>	8	-2923.13	0.29	-30.24
	Min. M <sub>z</sub>	11	-3008.45	30.90	-0.06
	Min. Torsion	10	-0.60	27.07	-15.15

### Tower Mast Reaction Summary

Load Combination	Vertical K	Shear <sub>x</sub> K	Shear <sub>z</sub> K	Overturning Moment, M <sub>x</sub> kip-ft	Overturning Moment, M <sub>z</sub> kip-ft	Torque kip-ft
Dead Only	31.30	0.00	0.00	-0.16	0.15	0.00
Dead+Wind 0 deg - No Ice	31.30	0.20	-30.47	-2953.79	-24.09	-0.43
Dead+Wind 30 deg - No Ice	31.30	15.78	-26.31	-2546.79	-1546.22	-0.29
Dead+Wind 60 deg - No Ice	31.30	26.88	-15.45	-1503.27	-2620.60	-0.29
Dead+Wind 90 deg - No Ice	31.30	30.86	-0.48	-61.96	-3003.17	-0.24
Dead+Wind 120 deg - No Ice	31.30	26.72	14.71	1407.92	-2601.49	-0.18
Dead+Wind 150 deg - No Ice	31.30	15.06	26.04	2512.74	-1454.38	0.00
Dead+Wind 180 deg - No Ice	31.30	-0.29	30.24	2923.13	36.60	0.28
Dead+Wind 210 deg - No Ice	31.30	-15.56	26.31	2546.22	1517.43	0.50
Dead+Wind 240 deg - No Ice	31.30	-27.07	15.15	1461.77	2646.56	0.60
Dead+Wind 270 deg - No Ice	31.30	-30.90	0.06	5.38	3008.45	0.38
Dead+Wind 300 deg - No Ice	31.30	-26.63	-14.97	-1443.70	2590.61	0.01
Dead+Wind 330 deg - No Ice	31.30	-15.34	-26.05	-2513.68	1493.07	-0.34
Dead+Ice+Temp	42.67	-0.00	0.00	-0.38	0.83	0.00
Dead+Wind 0 deg+Ice+Temp	42.67	0.04	-7.06	-717.40	-4.47	-0.10
Dead+Wind 30 deg+Ice+Temp	42.67	3.65	-6.10	-618.54	-372.61	-0.09
Dead+Wind 60 deg+Ice+Temp	42.67	6.22	-3.58	-364.41	-633.41	-0.11
Dead+Wind 90 deg+Ice+Temp	42.67	7.14	-0.10	-13.89	-726.66	-0.10
Dead+Wind 120 deg+Ice+Temp	42.67	6.19	3.42	342.89	-629.71	-0.08
Dead+Wind 150 deg+Ice+Temp	42.67	3.49	6.04	610.57	-352.62	-0.02
Dead+Wind 180 deg+Ice+Temp	42.67	-0.06	7.01	709.72	8.54	0.07
Dead+Wind 210 deg+Ice+Temp	42.67	-3.60	6.10	617.70	367.60	0.14
Dead+Wind 240 deg+Ice+Temp	42.67	-6.26	3.51	354.42	640.74	0.18
Dead+Wind 270 deg+Ice+Temp	42.67	-7.15	0.01	0.35	729.39	0.13
Dead+Wind 300 deg+Ice+Temp	42.67	-6.17	-3.48	-351.82	628.68	0.04
Dead+Wind 330 deg+Ice+Temp	42.67	-3.56	-6.04	-611.48	362.96	-0.06
Dead+Wind 0 deg - Service	31.30	0.07	-10.54	-1024.09	-8.25	-0.15
Dead+Wind 30 deg - Service	31.30	5.46	-9.11	-883.02	-535.95	-0.10
Dead+Wind 60 deg - Service	31.30	9.30	-5.34	-521.30	-908.47	-0.10
Dead+Wind 90 deg - Service	31.30	10.68	-0.16	-21.60	-1041.08	-0.08
Dead+Wind 120 deg - Service	31.30	9.24	5.09	487.97	-901.77	-0.06
Dead+Wind 150 deg - Service	31.30	5.21	9.01	870.91	-504.04	0.00
Dead+Wind 180 deg - Service	31.30	-0.10	10.46	1013.20	12.80	0.10

Load Combination	Vertical	Shear <sub>x</sub>	Shear <sub>z</sub>	Overturning Moment, M <sub>x</sub>	Overturning Moment, M <sub>z</sub>	Torque
	K	K	K	kip-ft	kip-ft	kip-ft
Dead+Wind 210 deg - Service	31.30	-5.39	9.10	882.59	526.16	0.18
Dead+Wind 240 deg - Service	31.30	-9.37	5.24	506.69	917.69	0.21
Dead+Wind 270 deg - Service	31.30	-10.69	0.02	1.75	1043.13	0.13
Dead+Wind 300 deg - Service	31.30	-9.22	-5.18	-500.60	898.21	0.00
Dead+Wind 330 deg - Service	31.30	-5.31	-9.01	-871.48	517.69	-0.12

### Solution Summary

Load Comb.	Sum of Applied Forces			Sum of Reactions			% Error
	PX K	PY K	PZ K	PX K	PY K	PZ K	
1	0.00	-31.30	0.00	0.00	31.30	0.00	0.000%
2	0.20	-31.30	-30.47	-0.20	31.30	30.47	0.000%
3	15.78	-31.30	-26.31	-15.78	31.30	26.31	0.000%
4	26.88	-31.30	-15.45	-26.88	31.30	15.45	0.000%
5	30.86	-31.30	-0.48	-30.86	31.30	0.48	0.000%
6	26.72	-31.30	14.71	-26.72	31.30	-14.71	0.000%
7	15.06	-31.30	26.04	-15.06	31.30	-26.04	0.000%
8	-0.29	-31.30	30.24	0.29	31.30	-30.24	0.000%
9	-15.56	-31.30	26.31	15.56	31.30	-26.31	0.000%
10	-27.07	-31.30	15.15	27.07	31.30	-15.15	0.000%
11	-30.90	-31.30	0.06	30.90	31.30	-0.06	0.000%
12	-26.63	-31.30	-14.97	26.63	31.30	14.97	0.000%
13	-15.34	-31.30	-26.05	15.34	31.30	26.05	0.000%
14	0.00	-42.67	0.00	0.00	42.67	0.00	0.000%
15	0.04	-42.67	-7.06	-0.04	42.67	7.06	0.000%
16	3.65	-42.67	-6.10	-3.65	42.67	6.10	0.000%
17	6.22	-42.67	-3.58	-6.22	42.67	3.58	0.000%
18	7.14	-42.67	-0.10	-7.14	42.67	0.10	0.000%
19	6.19	-42.67	3.42	-6.19	42.67	-3.42	0.000%
20	3.49	-42.67	6.04	-3.49	42.67	-6.04	0.000%
21	-0.06	-42.67	7.01	0.06	42.67	-7.01	0.000%
22	-3.60	-42.67	6.10	3.60	42.67	-6.10	0.000%
23	-6.26	-42.67	3.51	6.26	42.67	-3.51	0.000%
24	-7.15	-42.67	0.01	7.15	42.67	-0.01	0.000%
25	-6.17	-42.67	-3.48	6.17	42.67	3.48	0.000%
26	-3.56	-42.67	-6.04	3.56	42.67	6.04	0.000%
27	0.07	-31.30	-10.54	-0.07	31.30	10.54	0.000%
28	5.46	-31.30	-9.11	-5.46	31.30	9.11	0.000%
29	9.30	-31.30	-5.34	-9.30	31.30	5.34	0.000%
30	10.68	-31.30	-0.16	-10.68	31.30	0.16	0.000%
31	9.24	-31.30	5.09	-9.24	31.30	-5.09	0.000%
32	5.21	-31.30	9.01	-5.21	31.30	-9.01	0.000%
33	-0.10	-31.30	10.46	0.10	31.30	-10.46	0.000%
34	-5.39	-31.30	9.10	5.39	31.30	-9.10	0.000%
35	-9.37	-31.30	5.24	9.37	31.30	-5.24	0.000%
36	-10.69	-31.30	0.02	10.69	31.30	-0.02	0.000%
37	-9.22	-31.30	-5.18	9.22	31.30	5.18	0.000%
38	-5.31	-31.30	-9.01	5.31	31.30	9.01	0.000%

### Non-Linear Convergence Results

Load Combination	Converged?	Number of Cycles	Displacement Tolerance	Force Tolerance
1	Yes	4	0.00000001	0.00000001
2	Yes	4	0.00000001	0.00025440
3	Yes	5	0.00000001	0.00055665

4	Yes	5	0.00000001	0.00056096
5	Yes	4	0.00000001	0.00090213
6	Yes	5	0.00000001	0.00053474
7	Yes	5	0.00000001	0.00052879
8	Yes	4	0.00000001	0.00065883
9	Yes	5	0.00000001	0.00055498
10	Yes	5	0.00000001	0.00055071
11	Yes	4	0.00000001	0.00022714
12	Yes	5	0.00000001	0.00053893
13	Yes	5	0.00000001	0.00054569
14	Yes	4	0.00000001	0.00000001
15	Yes	5	0.00000001	0.00012378
16	Yes	5	0.00000001	0.00017162
17	Yes	5	0.00000001	0.00017349
18	Yes	5	0.00000001	0.00012551
19	Yes	5	0.00000001	0.00016583
20	Yes	5	0.00000001	0.00016346
21	Yes	5	0.00000001	0.00012257
22	Yes	5	0.00000001	0.00017125
23	Yes	5	0.00000001	0.00017251
24	Yes	5	0.00000001	0.00012626
25	Yes	5	0.00000001	0.00016856
26	Yes	5	0.00000001	0.00016809
27	Yes	4	0.00000001	0.00006736
28	Yes	5	0.00000001	0.00005560
29	Yes	5	0.00000001	0.00005672
30	Yes	4	0.00000001	0.00009078
31	Yes	5	0.00000001	0.00005157
32	Yes	5	0.00000001	0.00005007
33	Yes	4	0.00000001	0.00008755
34	Yes	5	0.00000001	0.00005522
35	Yes	5	0.00000001	0.00005475
36	Yes	4	0.00000001	0.00006689
37	Yes	5	0.00000001	0.00005233
38	Yes	5	0.00000001	0.00005343

### Maximum Tower Deflections - Service Wind

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L1	147 - 133	43.940	35	2.5264	0.0014
L2	133 - 85.5	36.544	35	2.5163	0.0014
L3	89.25 - 42.75	16.094	35	1.7684	0.0006
L4	47.5 - 0	4.403	35	0.8653	0.0003

### Critical Deflections and Radius of Curvature - Service Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
132.00	VHLP1-23	35	36.023	2.5111	0.0028	8903
130.00	APXV9ERR18-C-A20	35	34.983	2.4982	0.0027	7900
121.00	(2) LPA-80080-6CF-EDIN w/ Mount Pipe	35	30.391	2.4029	0.0024	5251
119.00	RRH2X40-AWS	35	29.394	2.3744	0.0023	4887
111.00	(2) 7770.00	35	25.510	2.2390	0.0018	3825
80.00	OG-860/1920/GPS-A	35	12.744	1.5586	0.0005	2389

### Maximum Tower Deflections - Design Wind

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L1	147 - 133	126.179	10	7.2669	0.0052
L2	133 - 85.5	104.989	10	7.2379	0.0053
L3	89.25 - 42.75	46.327	10	5.0924	0.0016
L4	47.5 - 0	12.690	10	2.4942	0.0007

### Critical Deflections and Radius of Curvature - Design Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
132.00	VHLP1-23	10	103.494	7.2230	0.0061	3196
130.00	APXV9ERR18-C-A20	10	100.515	7.1861	0.0060	2833
121.00	(2) LPA-80080-6CF-EDIN w/ Mount Pipe	10	87.354	6.9130	0.0052	1880
119.00	RRH2X40-AWS	10	84.494	6.8313	0.0050	1749
111.00	(2) 7770.00	10	73.355	6.4432	0.0040	1367
80.00	OG-860/1920/GPS-A	10	36.700	4.4896	0.0014	843

### Compression Checks

### Pole Design Data

Section No.	Elevation ft	Size	L ft	L <sub>u</sub> ft	Kl/r	F <sub>a</sub> ksi	A in <sup>2</sup>	Actual P K	Allow. P <sub>a</sub> K	Ratio P/P <sub>a</sub>
L1	147 - 133 (1)	TP12.75x12.75x0.1875	14.00	0.00	0.0	21.000	7.3999	-0.30	155.40	0.002
L2	133 - 85.5 (2)	TP29.418x12.75x0.3125	47.50	0.00	0.0	39.000	27.9633	-10.14	1090.57	0.009
L3	85.5 - 42.75 (3)	TP37.687x27.4771x0.375	46.50	0.00	0.0	39.000	43.7949	-18.36	1708.00	0.011
L4	42.75 - 0 (4)	TP45.83x35.8941x0.4375	47.50	0.00	0.0	39.000	63.9467	-31.27	2493.92	0.013

### Pole Bending Design Data

Section No.	Elevation ft	Size	Actual M <sub>x</sub> kip-ft	Actual f <sub>bx</sub> ksi	Allow. F <sub>bx</sub> ksi	Ratio f <sub>bx</sub> /F <sub>bx</sub>	Actual M <sub>y</sub> kip-ft	Actual f <sub>by</sub> ksi	Allow. F <sub>by</sub> ksi	Ratio f <sub>by</sub> /F <sub>by</sub>
L1	147 - 133 (1)	TP12.75x12.75x0.1875	3.19	1.672	23.100	0.072	0.00	0.000	23.100	0.000
L2	133 - 85.5 (2)	TP29.418x12.75x0.3125	659.40	41.789	39.000	1.071	0.00	0.000	39.000	0.000
L3	85.5 - 42.75 (3)	TP37.687x27.4771x0.375	1661.5 9	51.470	39.000	1.320	0.00	0.000	39.000	0.000
L4	42.75 - 0 (4)	TP45.83x35.8941x0.4375	3023.4 2	51.214	39.000	1.313	0.00	0.000	39.000	0.000

### Pole Shear Design Data

Section No.	Elevation ft	Size	Actual V K	Actual f <sub>v</sub> ksi	Allow. F <sub>v</sub> ksi	Ratio f <sub>v</sub> /F <sub>v</sub>	Actual T kip-ft	Actual f <sub>vt</sub> ksi	Allow. F <sub>vt</sub> ksi	Ratio f <sub>vt</sub> /F <sub>vt</sub>
L1	147 - 133 (1)	TP12.75x12.75x0.1875	0.46	0.062	14.000	0.009	0.00	0.000	14.000	0.000

Section No.	Elevation ft	Size	Actual V K	Actual $f_v$ ksi	Allow. $F_v$ ksi	Ratio $\frac{f_v}{F_v}$	Actual T kip-ft	Actual $f_{vt}$ ksi	Allow. $F_{vt}$ ksi	Ratio $\frac{f_{vt}}{F_{vt}}$
L2	133 - 85.5 (2)	TP29.418x12.75x0.3125	21.65	0.774	26.000	0.061	0.36	0.011	26.000	0.000
L3	85.5 - 42.75 (3)	TP37.687x27.4771x0.375	26.28	0.600	26.000	0.047	0.49	0.007	26.000	0.000
L4	42.75 - 0 (4)	TP45.83x35.8941x0.4375	31.05	0.486	26.000	0.038	0.60	0.005	26.000	0.000

### Pole Interaction Design Data

Section No.	Elevation ft	Ratio P $P_a$	Ratio $f_{bx}$ $F_{bx}$	Ratio $f_{by}$ $F_{by}$	Ratio $f_v$ $F_v$	Ratio $f_{vt}$ $F_{vt}$	Comb. Stress Ratio	Allow. Stress Ratio	Criteria
L1	147 - 133 (1)	0.002	0.072	0.000	0.009	0.000	0.074	1.333	H1-3+VT ✓
L2	133 - 85.5 (2)	0.009	1.071	0.000	0.061	0.000	1.082	1.333	H1-3+VT ✓
L3	85.5 - 42.75 (3)	0.011	1.320	0.000	0.047	0.000	1.331	1.333	H1-3+VT ✓
L4	42.75 - 0 (4)	0.013	1.313	0.000	0.038	0.000	1.326	1.333	H1-3+VT ✓

### Section Capacity Table

Section No.	Elevation ft	Component Type	Size	Critical Element	P K	SF* $P_{allow}$ K	% Capacity	Pass Fail
L1	147 - 133	Pole	TP12.75x12.75x0.1875	1	-0.30	207.15	5.6	Pass
L2	133 - 85.5	Pole	TP29.418x12.75x0.3125	2	-10.14	1453.73	81.1	Pass
L3	85.5 - 42.75	Pole	TP37.687x27.4771x0.375	3	-18.36	2276.76	99.9	Pass
L4	42.75 - 0	Pole	TP45.83x35.8941x0.4375	4	-31.27	3324.40	99.5	Pass
Summary								
Pole (L3)							99.9	Pass
<b>RATING =</b>							<b>99.9</b>	<b>Pass</b>

**APPENDIX B**  
**BASE LEVEL DRAWING**






(RESERVED)  
(1) 1-5/8" TO 121 FT LEVEL  
(INSTALLED)  
(12) 1-5/8" TO 121 FT LEVEL

(INSTALLED-IN 2" CONDUIT)  
(1) 3/8" TO 111 FT LEVEL  
(2) 3/4" TO 111 FT LEVEL  
(INSTALLED)  
(12) 1-1/4" TO 111 FT LEVEL

(INSTALLED)  
(1) 1/2" TO 80 FT LEVEL

(INSTALLED-IN CONDUIT)  
(6) 5/16" TO 130 FT LEVEL  
(INSTALLED)  
(3) 1/2" TO 130 FT LEVEL

(PROPOSED)  
(1) 1-1/4" TO 130 FT LEVEL  
(INSTALLED)  
(3) 1-1/4" TO 130 FT LEVEL

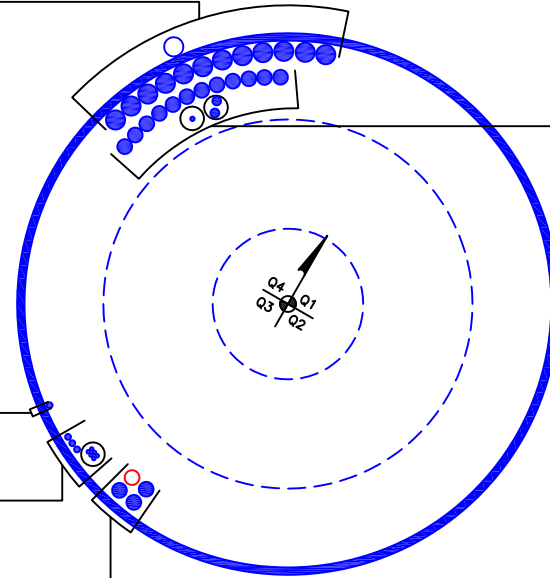

**APPENDIX C**  
**ADDITIONAL CALCULATIONS**

# Square, Stiffened / Unstiffened Base Plate, Any Rod Material - Rev. F / G

- Assumptions:**
- 1) Rod groups at corners. Total # rods divisible by 4. Maximum total # of rods = 48 (12 per Corner).
  - 2) Rod Spacing = Straight Center-to-Center distance between any (2) adjacent rods (same corner)
  - 3) Clear space between bottom of leveling nut and top of concrete **not** exceeding  $(1) \times (\text{Rod Diameter})$

## Site Data

BU#: 876310  
 Site Name: BEAUMONT FARM  
 App #: 245438 Rev.1

## Anchor Rod Data

Eta Factor, $\eta$	0.5	TIA G (Fig. 4-4)
Qty:	16	
Diam:	2.25	in
Rod Material:	A615-J	
Yield, $F_y$ :	75	ksi
Strength, $F_u$ :	100	ksi
Bolt Circle:	54	in
Anchor Spacing:	6	in

## Plate Data

W=Side:	54	in
Thick:	3	in
Grade:	50	ksi
Clip Distance:	10	in

## Stiffener Data (Welding at both sides)

Configuration:	Unstiffened	
Weld Type:		**
Groove Depth:		<-- Disregard
Groove Angle:		<-- Disregard
Fillet H. Weld:		in
Fillet V. Weld:		in
Width:		in
Height:		in
Thick:		in
Notch:		in
Grade:		ksi
Weld str.:		ksi

## Pole Data

Diam:	45.83	in
Thick:	0.4375	in
Grade:	65	ksi
# of Sides:	12	"0" IF Round

## Stress Increase Factor

ASD ASIF:	1.333	
-----------	-------	--

\*\* Note: for complete joint penetration groove welds the groove depth must be exactly 1/2 the stiffener thickness for calculation purposes

## Base Reactions

TIA Revision:	F	
Unfactored Moment, M:	3023	ft-kips
Unfactored Axial, P:	31	kips
Unfactored Shear, V:	31	kips

## Anchor Rod Results

TIA F --> Maximum Rod Tension: 166.0 Kips  
 Allowable Tension: 195.0 Kips  
 Anchor Rod Stress Ratio: 85.2% **Pass**

## Base Plate Results

Base Plate Stress: 47.1 ksi  
 Allowable PL Bending Stress: 50.0 ksi  
 Base Plate Stress Ratio: 94.2% **Pass**

## Flexural Check

## PL Ref. Data

Yield Line (in):	30.54
Max PL Length:	30.54


## N/A - Unstiffened

## Stiffener Results

Horizontal Weld: N/A  
 Vertical Weld: N/A  
 Plate Flex+Shear,  $f_b/F_b + (f_v/F_v)^2$ : N/A  
 Plate Tension+Shear,  $f_t/F_t + (f_v/F_v)^2$ : N/A  
 Plate Comp. (AISC Bracket): N/A

## Pole Results

Pole Punching Shear Check: N/A

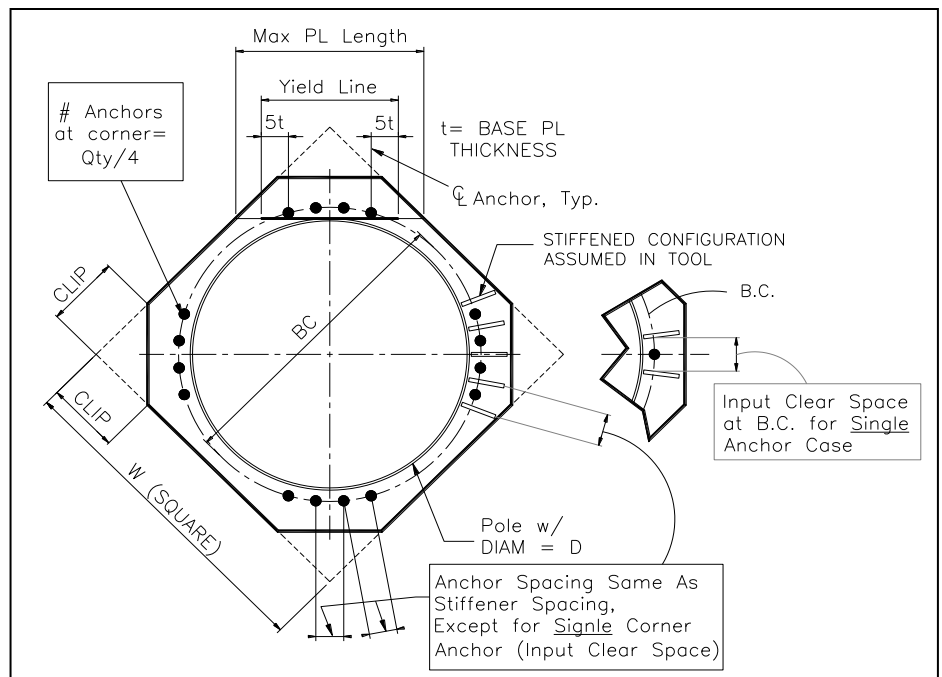

# Monopole Block Foundation

Checks capacity of monolithic block foundation for a monopole tower per TIA/EIA-222-F



**BU #:** 876310  
**Site Name:** BEAUMONT FARM  
**App No.:** 245438 Rev.1

Design Reactions		
Shear, <b>S:</b>	31.00	kips
Moment, <b>M:</b>	3023.00	ft*kips
Height, <b>H:</b>	147.00	ft
Weight, <b>Wt:</b>	31.00	kips
Base Diameter, <b>BD:</b>	45.8	in


Foundation Dimensions		
Depth, <b>D:</b>	4.5	ft
Block Width, <b>W:</b>	23.0	ft
Neglected Depth, <b>N:</b>	3.5	ft
Ext. Above Grade, <b>E:</b>	0.5	ft
Anchor Steel Length, <b>Lst:</b>	72.0	in
Clear Cover, <b>cc:</b>	3.0	in

Soil Properties		
Soil Unit Weight, <b>γ:</b>	0.125	kcf
Allowable Bearing, <b>Bc:</b>	20.000	ksf
Int. Angle of Friction, <b>Φ:</b>	0.00	deg
Cohesion, <b>Co:</b>	4.000	ksf
Passive Pressure, <b>Pp:</b>	0.000	kcf
Base Friction, <b>μ:</b>	0.4	
Seismic Zone, <b>z:</b>	1	

Material Properties		
Rebar Yield Strength, <b>Fy:</b>	60000	psi
Concrete Strength, <b>F'c:</b>	3000	psi
Concrete Density, <b>δc:</b>	0.150	kcf

Rebar Properties		
Pad Rebar Size, <b>sp:</b>	11	
Rebar Quantity, <b>mp:</b>	22	10

Design Checks				
	Capacity/ Availability	Demands/ Limits	Check	%
Shear (ksf)	74.86	31.00	OK	41.4%
Overturning (ft*kips):	3279.42	3178.00	OK	96.9%
Bearing (ksf):	20.00	3.05	OK	15.2%
Shear - 1-Way (kips):	1702.04	707.28	OK	41.6%
Pad Rebar Area (in <sup>2</sup> ):	34.35	14.90	OK	N/A
Bar Spacing (in):	11.38	18 > Bs > 2	OK	N/A
Development Length (in):	135.00	60.24	OK	N/A

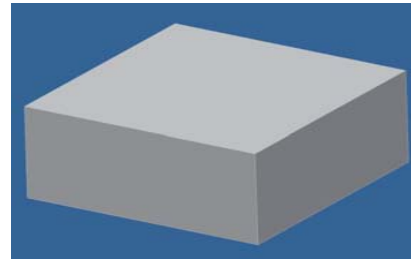

Modification Checks			
	Capacity/ Availability	Demands/ Limits	Check
Minimum Extra Thickness (in):	0.00	0.00	Not Used
Pad Rebar Area-short (in <sup>2</sup> ):	8.84	0.00	Not Used
Pad Rebar Area-long (in2):	2.21	0.00	Not Used
Pad Rebar Spacing-short (in2):	13.42	18 > Bs > 2	Not Used
Pad Rebar Spacing-long (in2):	66.56	18 > Bs > 2	Not Used
End Cap Width (in):	0.00	0.00	Not Used
End Cap Rebar Area (in2):	4.81	0.00	Not Used
EC Rebar Spacing (in):	-1.73	18 > Bs > 2	Not Used
Tie Spacing (in):	13.71	270 > s > 4.5	Not Used
Dowel Area (in2):	8.84	0.00	Not Used
Dowel Embedment (in):	15.00	6.00	Not Used
Shear Strength of Cone (kips):	59.53	23.86	Not Used
Dowel Edge Distance (in):	12.00	14.51	Not Used
Dowel Spacing (in):	28.00	30.00	Not Used
Dowel Edge Distance (vert) (in):	30.00	14.51	Not Used
Dowel Devel. Length (in):	-3.00	15.38	Not Used

Modifications					
Pad Thickness, <b>Te:</b>	0	in	End Cap Width, <b>Wec:</b>	0	in
Revised Pad Thickness, <b>Tx:</b>	5	ft	Revised Width, <b>Wx:</b>	23	ft
Pad Rebar Size, <b>Se:</b>	6		EC Rebar Size, <b>Sec:</b>	7	per side, top & bottom
Rebar Quantity (long), <b>me:</b>	20	0	EC Rebar Quantity, <b>mec:</b>	8	0
Rebar Quantity (short), <b>mex:</b>	5	0	EC Tie Size, <b>Sect:</b>	4	per side
Dowel Size, <b>Sed:</b>	7		Tie Quantity, <b>mect:</b>	20	0
Dowel Quantity, <b>med:</b>	20	0	EC Dowel Size, <b>Secd:</b>	6	per side
			Dowel Quantity, <b>mecd:</b>	20	0
			Rows of Dowels, <b>Nd:</b>	2	
			Dowel Depth, <b>dec:</b>	15	in
			Edge Distance, <b>ec:</b>	12	in

RADIO FREQUENCY FCC REGULATORY COMPLIANCE  
MAXIMUM PERMISSIBLE EXPOSURE (MPE) ASSESSMENT

Sprint Existing Facility

Site ID: CT03XC008

Beaumont Farm

945 East Center Street  
Wallingford, CT 06492

**July 1, 2014**

**EBI Project Number: 62143774**

July 1, 2014

Sprint  
Attn: RF Engineering Manager  
1 International Boulevard, Suite 800  
Mahwah, NJ 07495

Re: Radio Frequency Maximum Permissible Exposure (MPE) Assessment for Site:  
**CT03XC008 - Beaumont Farm**

**Site Total: 57.32% - MPE% in full compliance**

EBI Consulting was directed to analyze the proposed upgrades to the existing Sprint facility located at 945 East Center Street, Wallingford, CT, for the purpose of determining whether the radio frequency (RF) exposure levels from the proposed Sprint equipment upgrades on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01 and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter ( $\mu\text{W}/\text{cm}^2$ ). The number of  $\mu\text{W}/\text{cm}^2$  calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits, therefore it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) – (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

General population/uncontrolled exposure limits apply to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general public would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Public exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter ( $\mu\text{W}/\text{cm}^2$ ). The general population exposure limit for the cellular band (850 MHz Band) is approximately  $567 \mu\text{W}/\text{cm}^2$ , and the general population exposure limit for the 1900 MHz and 2500 MHz bands is  $1000 \mu\text{W}/\text{cm}^2$ . Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.

Occupational/controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

## **CALCULATIONS**

Calculations were done for the proposed upgrades to the existing Sprint Wireless antenna facility located at 945 East Center Street, Wallingford, CT, using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. All calculations were performed assuming a lobe representing the maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was focused at the base of the tower. For this report the sample point is the top of a 6 foot person standing at the base of the tower.

For all calculations, all emissions were calculated using the following assumptions:

- 1) 2 channels in the 1900 MHz Band were considered for each sector of the proposed installation.
- 2) 1 channel in the 800 MHz Band was considered for each sector of the proposed installation
- 3) 2 channels in the 2500 MHz Band were considered for each sector of the proposed installation.
- 4) All radios at the proposed installation were considered to be running at full power and were uncombined in their RF transmissions paths per carrier prescribed configuration. Per FCC OET Bulletin No. 65 - Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. This is rarely the case, and if so, is never continuous.
- 5) For the following calculations the sample point was the top of a six foot person standing at the base of the tower. The maximum gain of the antenna per the antenna manufactures supplied specifications minus 10 dB was used in this direction. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.

- 6) The antennas used in this modeling are the RFS APXVSPP18-C-A20, RFS APXV9ERR18-C-A20 and the RFS APXVTM14-C-I20. This is based on feedback from the carrier with regards to anticipated antenna selection. The RFS APXVSPP18-C-A20 has a 15.9 dBd gain value at its main lobe at 1900 MHz and 13.4 dBd at its main lobe for 850 MHz. The RFS APXV9ERR18-C-A20 has a 14.9 dBd gain value at its main lobe at 1900 MHz and 11.9 dBd at its main lobe for 850 MHz. The RFS APXVTM14-C-I20 has a 15.9 dBd gain value at its main lobe at 2500 MHz. The maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was used for all calculations. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 7) The antenna mounting height centerline for the proposed antennas is **130 feet** above ground level (AGL).
- 8) Emissions values for additional carriers were taken from the Connecticut Siting Council active database. Values in this database are provided by the individual carriers themselves.

All calculation were done with respect to uncontrolled / general public threshold limits



Site ID	CT03XC008 - Beaumont Farm
Site Address	945 East Center Street, Wallingford, CT, 06492
Site Type	Monopole

**Sector 1**

Antenna Number	Antenna Make	Antenna Model	Radio Type	Frequency Band	Technology	Power Out Per Channel (Watts)	Number of Channels	Composite Power	Antenna Gain (10 db reduction)	Antenna Height (ft)	analysis height	Cable Size	Cable Loss (dB)	Additional Loss (dB)	ERP	Power Density Percentage
1a	RFS	APXVSP18-C-A20	RRH	1900 MHz	CDMA / LTE	20	2	40	5.9	130	124	1/2 "	0.5	0	138.69	0.32%
1a	RFS	APXVSP18-C-A20	RRH	850 MHz	CDMA / LTE	20	1	20	3.4	130	124	1/2 "	0.5	0	39.00	0.16%
1B	RFS	APXVTMM14-C-120	RRH	2500 MHz	CDMA / LTE	20	2	40	5.9	130	124	1/2 "	0.5	0	138.69	0.57%
Sector total Power Density Value:																1.06%

**Sector 2**

Antenna Number	Antenna Make	Antenna Model	Radio Type	Frequency Band	Technology	Power Out Per Channel (Watts)	Number of Channels	Composite Power	Antenna Gain (10 db reduction)	Antenna Height (ft)	analysis height	Cable Size	Cable Loss (dB)	Additional Loss (dB)	ERP	Power Density Percentage
2a	RFS	APXV9ERR18-C-A20	RRH	1900 MHz	CDMA / LTE	20	2	40	4.9	130	124	1/2 "	0.5	0	110.17	0.26%
2a	RFS	APXV9ERR18-C-A20	RRH	850 MHz	CDMA / LTE	20	1	20	1.9	130	124	1/2 "	0.5	0	27.61	0.11%
2B	RFS	APXVTMM14-C-120	RRH	2500 MHz	CDMA / LTE	20	2	40	5.9	130	124	1/2 "	0.5	0	138.69	0.57%
Sector total Power Density Value:																0.94%

**Sector 3**

Antenna Number	Antenna Make	Antenna Model	Radio Type	Frequency Band	Technology	Power Out Per Channel (Watts)	Number of Channels	Composite Power	Antenna Gain (10 db reduction)	Antenna Height (ft)	analysis height	Cable Size	Cable Loss (dB)	Additional Loss (dB)	ERP	Power Density Percentage
3a	RFS	APXVSP18-C-A20	RRH	1900 MHz	CDMA / LTE	20	2	40	5.9	130	124	1/2 "	0.5	0	138.69	0.32%
3a	RFS	APXVSP18-C-A20	RRH	850 MHz	CDMA / LTE	20	1	20	3.4	130	124	1/2 "	0.5	0	39.00	0.16%
3B	RFS	APXVTMM14-C-120	RRH	2500 MHz	CDMA / LTE	20	2	40	5.9	130	124	1/2 "	0.5	0	138.69	0.57%
Sector total Power Density Value:																1.06%

Site Composite MPE %	
Carrier	MPE %
Sprint	3.06%
AT&T	25.65%
Verizon Wireless	27.44%
Clearwire	1.13%
Sprint MW	0.04%
<b>Total Site MPE %</b>	<b>57.32%</b>

## Summary

All calculations performed for this analysis yielded results that were well within the allowable limits for general public Maximum Permissible Exposure (MPE) to radio frequency energy.

The anticipated Maximum Composite contributions from the Sprint facility are **3.06% (1.06% from sector 1, 0.94% from sector 2 and 1.06% from sector 3)** of the allowable FCC established general public limit considering all three sectors simultaneously sampled at the ground level.

The anticipated composite MPE value for this site assuming all carriers present is **57.32%** of the allowable FCC established general public limit sampled at 6 feet above ground level. This total composite site value is based upon MPE values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.



Scott Heffernan  
RF Engineering Director

### **EBI Consulting**

21 B Street  
Burlington, MA 01803