



Filed by:
Kri Pelletier, Property Specialist - SBA Communications
134 Flanders Rd., Suite 125, Westborough, MA 01581
508.251.0720 x 3804 - kpelletier@sbsite.com

January 31, 2018

Melanie A. Bachman
Acting Executive Director
Connecticut Siting Council
Ten Franklin Square
New Britain, CT 06051

Notice of Exempt Modification
285 Chamberlain Hill Road, Higganum, CT
41 30 6.35 N
-72 37 7.3 W
Sprint #: CT33XC545_2.5

Dear Ms. Bachman:

Sprint currently maintains antennas at the 185-foot level of the existing 185-foot Monopole Tower at 285 Chamberlain Hill Road in Higganum, CT. The property is owned by Ruth Opuszynski/Quale. The Tower is owned by SBA Properties LLC. Sprint now intends to add (3) newer technology cell antennas at the 185-foot level of the tower. The proposed full scope of work is as follows below.

Please note: previous approval was given by the Siting Council on 6/16/14 under EM-SPRINT-061-140530. A Notification of Construction Not Complete was sent 9/15/15. Sprint now intends to resume construction. The proposed full scope of work is as follows:

Remove: N/A

Remove and Replace: N/A

Install:

- (3) RFS APXVTM14-C-I20 – Panel Antennas
- (3) ALU TD-RRH8x20-25 RRUs
- (1) 1-1/4" Hybrid

Existing Equipment to Remain (Including entitlements):

- (3) RFS APXVSPP18-C-A20 – Panel Antennas
- (4) RFS ACU-A20-N RETs
- (3) ALU 1900 MHz RRUs
- (3) ALU 800 MHz RRUs
- (3) ALU 800 MHz Filters
- (3) 1-1/4" Hybrid



This facility was originally approved prior to the Council's jurisdiction. The Town of Haddam's Planning & Zoning Commission issued a Special Permit for a 190' tower and associated structures on 11/1/99. There were no post-construction tower conditions set. This modification complies with all aforementioned conditions.

Please accept this letter as notification pursuant to Regulations of Connecticut State Agencies §16-50j-73, for construction that constitutes an exempt modification pursuant to R.C.S.A. §16.50j-72(b)(2). In accordance with R.C.S.A. § 16.50j-73, a copy of this letter is being sent to the Town of Haddam's First Selectman, Lizz Milardo and Town Planner, Liz Glidden, as well as to the Property Owner. (Separate notice is not being sent to the tower owner, as it belongs to SBA.)

The planned modifications to the facility fall squarely within those activities explicitly provided for in R.C.S.A. §16.50j-72(b)(2).

1. The proposed modifications will not result in an increase in the height of the existing structure.
2. The proposed modification will not require the extension of the site boundary.
3. The proposed modifications will not increase noise levels at the facility by six decibels or more, or to levels that exceed state and local criteria.
4. The operation of the replacement antennas will not increase radio frequency emissions at the facility to a level at or above the Federal Communications Commission safety standard.
5. The proposed modification will not cause a change or alteration in the physical or environmental characteristics of the site.
6. The existing structure and its foundation can support the proposed loading.

For the foregoing reasons, Sprint respectfully submits that the proposed modifications to the above-referenced telecommunication facility constitute an exempt modifications under R.C.S.A. § 16-50j-72(b)(2).

Sincerely,



Kri Pelletier
Property Specialist
SBA COMMUNICATIONS CORPORATION
134 Flanders Rd., Suite 125
Westborough, MA 01581
508.251.0720 x3804 + T
508.366.2610 + F
203.446.7700 + C
kpelletier@sbsite.com

Attachments

cc: Lizz Milardo, First Selectman Town of Haddam / with attachments
Town of Haddam, 30 Field Park Drive, Haddam, CT 06438
Liz Glidden, Town Planner /with attachments
Town of Haddam, 30 Field Park Drive, Haddam, CT 06438
Ruth Opuszynski/Quale / with attachments
285 Chamberlain Hill Rd., Higganum, CT 06441



POWER DENSITY

SPRINT Site Inventory and Power Data by Antenna

Sector:	A	Sector:	B	Sector:	C
Antenna #:	1	Antenna #:	1	Antenna #:	1
Make / Model:	RFS APXVSPP18-C-A20	Make / Model:	RFS APXVSPP18-C-A20	Make / Model:	RFS APXVSPP18-C-A20
Gain:	13.4 / 15.9 dBd	Gain:	13.4 / 15.9 dBd	Gain:	13.4 / 15.9 dBd
Height (AGL):	185 feet	Height (AGL):	185 feet	Height (AGL):	185 feet
Frequency Bands:	850 MHz / 1900 MHz (PCS)	Frequency Bands:	850 MHz / 1900 MHz (PCS)	Frequency Bands:	850 MHz / 1900 MHz (PCS)
Channel Count:	10	Channel Count:	10	Channel Count:	10
Total TX Power(W):	220 Watts	Total TX Power(W):	220 Watts	Total TX Power(W):	220 Watts
ERP (W):	7,537.38	ERP (W):	7,537.38	ERP (W):	7,537.38
Antenna A1 MPE%	0.96 %	Antenna B1 MPE%	0.96 %	Antenna C1 MPE%	0.96 %
Antenna #:	2	Antenna #:	2	Antenna #:	2
Make / Model:	RFS APXVTM14-C-I20	Make / Model:	RFS APXVTM14-C-I20	Make / Model:	RFS APXVTM14-C-I20
Gain:	15.9 dBd	Gain:	15.9 dBd	Gain:	15.9 dBd
Height (AGL):	185 feet	Height (AGL):	185 feet	Height (AGL):	185 feet
Frequency Bands:	2500 MHz (BRS)	Frequency Bands:	2500 MHz (BRS)	Frequency Bands:	2500 MHz (BRS)
Channel Count:	8	Channel Count:	8	Channel Count:	8
Total TX Power(W):	160 Watts	Total TX Power(W):	160 Watts	Total TX Power(W):	160 Watts
ERP (W):	6,224.72	ERP (W):	6,224.72	ERP (W):	6,224.72
Antenna A2 MPE%	0.70 %	Antenna B2 MPE%	0.70 %	Antenna C2 MPE%	0.70 %

Site Composite MPE%	
Carrier	MPE%
SPRINT - Max per sector	1.66 %
AT&T	1.13 %
Site Total MPE %:	2.79 %

SPRINT Sector A Total:	1.66 %
SPRINT Sector B Total:	1.66 %
SPRINT Sector C Total:	1.66 %
Site Total:	2.79 %

SPRINT Max Values per Frequency Band / Technology Per Sector	# Channels	Watts ERP (Per Channel)	Height (feet)	Total Power Density ($\mu\text{W}/\text{cm}^2$)	Frequency (MHz)	Allowable MPE ($\mu\text{W}/\text{cm}^2$)	Calculated % MPE
Sprint 850 MHz CDMA	1	437.55	185	0.49	850 MHz	567	0.09%
Sprint 850 MHz LTE	2	437.55	185	0.98	850 MHz	567	0.17%
Sprint 1900 MHz (PCS) CDMA	5	622.47	185	3.49	1900 MHz (PCS)	1000	0.35%
Sprint 1900 MHz (PCS) LTE	2	1,556.18	185	3.49	1900 MHz (PCS)	1000	0.35%
Sprint 2500 MHz (BRS) LTE	8	778.09	185	6.98	2500 MHz (BRS)	1000	0.70%
						Total:	1.66%

ORIGIN ID:BBFA (508) 614-0399
RICK WOODS
SBA NETWORK SERVICES INC
134 FLANDERS ROAD
SUITE 123
WESTBOROUGH MA 01581
UNITED STATES US

SHIP DATE: 31 JAN 18
ACT WGT: 1.00 LB
CAD: 105843304NET13980

BILL SENDER

TO LIZZ MILARDO, FIRST SELECTMAN
TOWN OF HADDAM
30 FIELD PARK DRIVE

HADDAM CT 06438


(508) 251-0720 X 3804

REF-10-56-92009-6099

PO:

DEPT:

552J11122D/DC45




J181118F220111

TRK# 7713 7427 8597
0201

THU - 01 FEB 12:00P
PRIORITY OVERNIGHT

EB RSPA

06438
CT-US BDL



After printing this label:

1. Use the 'Print' button on this page to print your label to your laser or inkjet printer.
2. Fold the printed page along the horizontal line.
3. Place label in shipping pouch and affix it to your shipment so that the barcode portion of the label can be read and scanned.

Warning: Use only the printed original label for shipping. Using a photocopy of this label for shipping purposes is fraudulent and could result in additional billing charges, along with the cancellation of your FedEx account number.

Use of this system constitutes your agreement to the service conditions in the current FedEx Service Guide, available on fedex.com. FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1,000, e.g. jewelry, precious metals, negotiable instruments and other items listed in our Service Guide. Written claims must be filed within strict time limits, see current FedEx Service Guide.

ORIGIN ID:BBFA (508) 614-0389
RICK WOODS
SBA NETWORK SERVICES INC
134 FLANDERS ROAD
SUITE 125
WESTBOROUGH MA 01581
UNITED STATES US

SHIP DATE: 31 JAN 18
ACT WT: 1.00 LB
CAD: 105843304/NET3980

BILL SENDER

TO LIZ GLIDDEN, TOWN PLANNER
TOWN OF HADDAM
30 FIELD PARK DRIVE


HADDAM CT 06438

(508) 251-0720 X.3804

REF: 10-56-92009-9089

PO:

DEPT:




J68111012891

TRK# 7713 7429 7950
1201

THU - 01 FEB 12:00P
PRIORITY OVERNIGHT

EB RSPA

06438
BDL
CT-US



552J1122D/CAS

After printing this label:

1. Use the 'Print' button on this page to print your label to your laser or inkjet printer.
2. Fold the printed page along the horizontal line.
3. Place label in shipping pouch and affix it to your shipment so that the barcode portion of the label can be read and scanned.

Warning: Use only the printed original label for shipping. Using a photocopy of this label for shipping purposes is fraudulent and could result in additional billing charges, along with the cancellation of your FedEx account number.

Use of this system constitutes your agreement to the service conditions in the current FedEx Service Guide, available on fedex.com. FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1,000, e.g. jewelry, precious metals, negotiable instruments and other items listed in our Service Guide. Written claims must be filed within strict time limits, see current FedEx Service Guide.

ORIGIN ID: BBFA (508) 614-0389
RICK WOODS
SBA NETWORK SERVICES INC
134 FLANDERS ROAD
SUITE 125
WESTBOROUGH, MA 01581
UNITED STATES US

SHIP DATE: 31 JAN 18
ACTWT: 1.00 LB
CAD: 105843304/NET3980
BILL SENDER

TO RUTH OPUSZYNSKI / QUALE

285 CHAMBERLAIN HILL RD.

HIGGANUM CT 06441


(508) 251-0720 X 3804

REF: 10-55-92009-8089

PO:

DEPT:

552J1/122D/DCA5

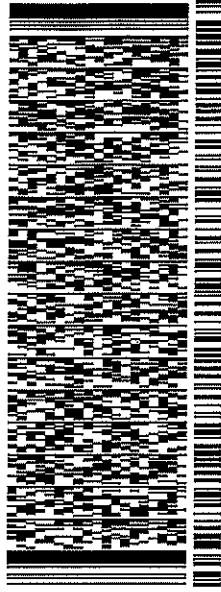


TRK# 7713 7431 4224
0201

THU - 01 FEB 10:30A
PRIORITY OVERNIGHT

EB RSPA

06441
BDL
CT-US



After printing this label:

1. Use the 'Print' button on this page to print your label to your laser or inkjet printer.
2. Fold the printed page along the horizontal line.
3. Place label in shipping pouch and affix it to your shipment so that the barcode portion of the label can be read and scanned.

Warning: Use only the printed original label for shipping. Using a photocopy of this label for shipping purposes is fraudulent and could result in additional billing charges, along with the cancellation of your FedEx account number.

Use of this system constitutes your agreement to the service conditions in the current FedEx Service Guide, available on fedex.com. FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1,000, e.g. jewelry, precious metals, negotiable instruments and other items listed in our Service Guide. Written claims must be filed within strict time limits, see current FedEx Service Guide.

SBA Network Services, LLC

To: CONNECTICUT SITING COUNCIL

129986

Check Number: 2125744

Date: 10/17/2017

Invoice Number	Invoice Date	Description	Gross Amount	Taxes Withheld	Net Amount
PRSF10171707	10/18/2017	CSC Fee_CT33XC545_Do Macro	\$ 625.00	\$ 0.00	\$ 625.00

\$ 625.00 \$ 0.00 \$ 625.00

SBA Network Services, LLC

8051 Congress Avenue
Boca Raton, FL 33487
(561) 995-7670

Wells Fargo Bank

061209756

2125744

129986

DATE

AMOUNT

10/17/2017

\$ 625.00

Six Hundred Twenty Five Dollars And 00 Cents

Void After 120 Days

Pay to the Order of:

CONNECTICUT SITING COUNCIL
ACCOUNTS RECEIVABLE
TEN FRANKLIN SQUARE

NEW BRITAIN, CT 06051



⑈ 2 1 25744 ⑆ 06 1 209756 ⑆ 20799004 24566 ⑆

285 CHAMBERLAIN HILL RD

Location 285 CHAMBERLAIN HILL RD

Mblu 02/ 020/ 2/ /

Acct# C0103400

Owner OPUSZYNSKI RUTH M

Assessment \$232,410

Appraisal \$332,010

PID 1176

Building Count 1

Current Value

Appraisal			
Valuation Year	Improvements	Land	Total
2016	\$219,160	\$112,850	\$332,010
Assessment			
Valuation Year	Improvements	Land	Total
2016	\$153,420	\$78,990	\$232,410

Owner of Record

Owner OPUSZYNSKI RUTH M
Co-Owner
Address 285 CHAMBERLAIN HILL RD
 HIGGANUM, CT 06441

Sale Price \$0
Certificate
Book & Page 335/ 144
Sale Date 01/13/2010

Ownership History

Ownership History				
Owner	Sale Price	Certificate	Book & Page	Sale Date
OPUSZYNSKI RUTH M	\$0		335/ 144	01/13/2010
OPUSZYNSKI DAVID & RUTH M	\$0		203/ 626	09/07/1995

Building Information


Building 1 : Section 1

Year Built: 1970
Living Area: 2,129
Replacement Cost: \$265,390
Building Percent 81
Good:
Replacement Cost
Less Depreciation: \$214,970

Building Photo


Building Attributes	
Field	Description
Style	Ranch

Model	Residential
Grade:	C+
Stories	1
Occupancy	1
Exterior Wall 1	Vinyl Siding
Exterior Wall 2	
Roof Structure	Gable
Roof Cover	Asphalt
Interior Wall 1	Drywall
Interior Wall 2	
Interior Flr 1	Carpet
Interior Flr 2	Hardwood
Heat Fuel	Oil
Heat Type:	Hot Water
AC Type:	Central
Total Bedrooms:	3 Bedrooms
Full Bthrms:	2
Half Baths:	0
Extra Fixtures	
Total Rooms:	7
Bath Style:	Average
Kitchen Style:	Average
Extra Kitchens	
Fireplace(s)	1
Extra Opening(s)	
Gas Fireplace(s)	
Blocked FPL(s)	
Woodstove(s)	
Bsmt Garage(s)	
SF Fin Bsmt	0
FBM Quality	
Whirlpool	
Sauna	
Foundation	Crawl

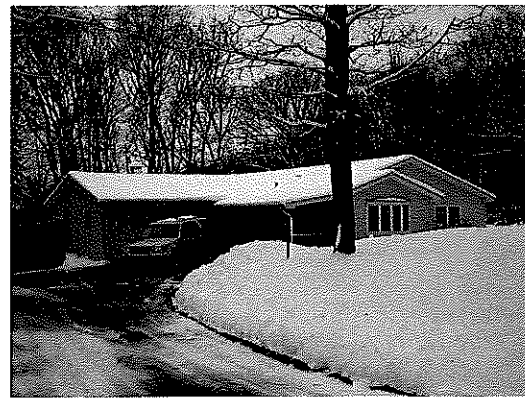

(http://images.vgsi.com/photos2/HaddamCTPhotos//\00\000\20\36.JPG)

Building Layout

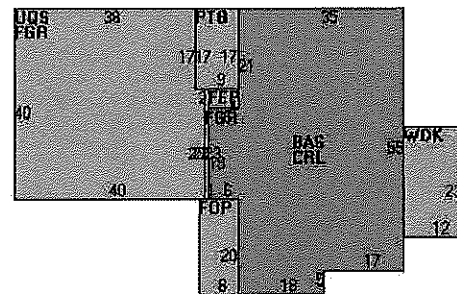

Building Sub-Areas (sq ft)		Legend	
Code	Description	Gross Area	Living Area
BAS	First Floor	2,129	2,129
CRL	Crawl Space	2,129	0
FEP	Finished Enclosed Porch	24	0
FGR	Garage	1,589	0
FOP	Open Porch	160	0
PTO	Patio	153	0
UQS	Unfin 3/4 Story	1,566	0
WDK	Deck	276	0
		8,026	2,129

Extra Features

Extra Features	Legend
No Data for Extra Features	

Land

Land Use

Land Line Valuation

Use Code	101	Size (Acres)	2.05
Description	Res Dwelling	Frontage	
Zone	R-2	Depth	
Neighborhood	500	Assessed Value	\$78,990
Alt Land Appr Category	No	Appraised Value	\$112,850

Outbuildings

Outbuildings						Legend
Code	Description	Sub Code	Sub Description	Size	Value	Bldg #
SHD1	Shed	FR	Frame	288 S.F.	\$3,110	1
SHD1	Shed	FR	Frame	120 S.F.	\$1,080	1

Valuation History

Appraisal			
Valuation Year	Improvements	Land	Total
2016	\$219,160	\$112,850	\$332,010
2015	\$219,160	\$112,850	\$332,010
2014	\$219,160	\$112,850	\$332,010

Assessment			
Valuation Year	Improvements	Land	Total
2016	\$153,420	\$78,990	\$232,410
2015	\$153,420	\$78,990	\$232,410
2014	\$153,420	\$78,990	\$232,410

(c) 2016 Vision Government Solutions, Inc. All rights reserved.



RADIO FREQUENCY EMISSIONS ANALYSIS REPORT EVALUATION OF HUMAN EXPOSURE POTENTIAL TO NON-IONIZING EMISSIONS

SPRINT Existing Facility

Site ID: CT33XC545

W. Higganum
285 Chamberlain Hill Road
Higganum, CT 06441

October 26, 2017

EBI Project Number: 6217004750

Site Compliance Summary	
Compliance Status:	COMPLIANT
Site total MPE% of FCC general population allowable limit:	2.79 %



October 26, 2017

SPRINT

Attn: RF Engineering Manager
1 International Boulevard, Suite 800
Mahwah, NJ 07495

Emissions Analysis for Site: **CT33XC545 – W. Higganum**

EBI Consulting was directed to analyze the proposed SPRINT facility located at **285 Chamberlain Hill Road, Higganum, CT**, for the purpose of determining whether the emissions from the Proposed SPRINT Antenna Installation located on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01 and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The number of $\mu\text{W}/\text{cm}^2$ calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits, therefore it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) – (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

General population/uncontrolled exposure limits apply to situations in which the general population may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general population would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Public exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The general population exposure limits for the 850 MHz Band is approximately $567 \mu\text{W}/\text{cm}^2$. The general population exposure limit for the 1900 MHz (PCS) and 2500 MHz (BRS) bands is $1000 \mu\text{W}/\text{cm}^2$. Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.



Occupational/controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

CALCULATIONS

Calculations were done for the proposed SPRINT Wireless antenna facility located at **285 Chamberlain Hill Road, Higganum, CT**, using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. Since SPRINT is proposing highly focused directional panel antennas, which project most of the emitted energy out toward the horizon, all calculations were performed assuming a lobe representing the maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was focused at the base of the tower. For this report the sample point is the top of a 6-foot person standing at the base of the tower.

For all calculations, all equipment was calculated using the following assumptions:

- 1) 1 CDMA channels (850 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 20 Watts per Channel.
- 2) 2 LTE channels (850 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 20 Watts per Channel.
- 3) 5 CDMA channels (1900 MHz (PCS)) were considered for each sector of the proposed installation. These Channels have a transmit power of 16 Watts per Channel.
- 4) 2 LTE channels (1900 MHz (PCS)) were considered for each sector of the proposed installation. These Channels have a transmit power of 40 Watts per Channel.
- 5) 8 LTE channels (2500 MHz (BRS)) were considered for each sector of the proposed installation. These Channels have a transmit power of 20 Watts per Channel.



- 6) All radios at the proposed installation were considered to be running at full power and were uncombined in their RF transmissions paths per carrier prescribed configuration. Per FCC OET Bulletin No. 65 - Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. This is rarely the case, and if so, is never continuous.
- 7) For the following calculations, the sample point was the top of a 6-foot person standing at the base of the tower. The maximum gain of the antenna per the antenna manufactures supplied specifications minus 10 dB was used in this direction. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 8) The antennas used in this modeling are the **RFS APXVSP18-C-A20** and the **RFS APXVTM14-C-I20** for transmission in the 850 MHz, 1900 MHz (PCS) and 2500 MHz (BRS) frequency bands. This is based on feedback from the carrier with regards to anticipated antenna selection. Maximum gain values for all antennas are listed in the Inventory and Power Data table below. The maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was used for all calculations. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 9) The antenna mounting height centerlines of the proposed antennas are **185 feet** above ground level (AGL) for **Sector A**, **185 feet** above ground level (AGL) for **Sector B** and **185 feet** above ground level (AGL) for Sector C.
- 10) Emissions values for additional carriers were taken from the Connecticut Siting Council active database. Values in this database are provided by the individual carriers themselves.

All calculations were done with respect to uncontrolled / general population threshold limits.



SPRINT Site Inventory and Power Data by Antenna

Sector:	A	Sector:	B	Sector:	C
Antenna #:	1	Antenna #:	1	Antenna #:	1
Make / Model:	RFS APXVSPPI8-C-A20	Make / Model:	RFS APXVSPPI8-C-A20	Make / Model:	RFS APXVSPPI8-C-A20
Gain:	13.4 / 15.9 dBd	Gain:	13.4 / 15.9 dBd	Gain:	13.4 / 15.9 dBd
Height (AGL):	185 feet	Height (AGL):	185 feet	Height (AGL):	185 feet
Frequency Bands	850 MHz / 1900 MHz (PCS)	Frequency Bands	850 MHz / 1900 MHz (PCS)	Frequency Bands	850 MHz / 1900 MHz (PCS)
Channel Count	10	Channel Count	10	Channel Count	10
Total TX Power(W):	220 Watts	Total TX Power(W):	220 Watts	Total TX Power(W):	220 Watts
ERP (W):	7,537.38	ERP (W):	7,537.38	ERP (W):	7,537.38
Antenna A1 MPE%	0.96 %	Antenna B1 MPE%	0.96 %	Antenna C1 MPE%	0.96 %
Antenna #:	2	Antenna #:	2	Antenna #:	2
Make / Model:	RFS APXVTM14-C-I20	Make / Model:	RFS APXVTM14-C-I20	Make / Model:	RFS APXVTM14-C-I20
Gain:	15.9 dBd	Gain:	15.9 dBd	Gain:	15.9 dBd
Height (AGL):	185 feet	Height (AGL):	185 feet	Height (AGL):	185 feet
Frequency Bands	2500 MHz (BRS)	Frequency Bands	2500 MHz (BRS)	Frequency Bands	2500 MHz (BRS)
Channel Count	8	Channel Count	8	Channel Count	8
Total TX Power(W):	160 Watts	Total TX Power(W):	160 Watts	Total TX Power(W):	160 Watts
ERP (W):	6,224.72	ERP (W):	6,224.72	ERP (W):	6,224.72
Antenna A2 MPE%	0.70 %	Antenna B2 MPE%	0.70 %	Antenna C2 MPE%	0.70 %

Site Composite MPE%	
Carrier	MPE%
SPRINT – Max per sector	1.66 %
AT&T	1.13 %
Site Total MPE %:	2.79 %

SPRINT Sector A Total:	1.66 %
SPRINT Sector B Total:	1.66 %
SPRINT Sector C Total:	1.66 %
Site Total:	2.79 %

SPRINT _ Max Values per Frequency Band / Technology Per Sector	# Channels	Watts ERP (Per Channel)	Height (feet)	Total Power Density ($\mu\text{W}/\text{cm}^2$)	Frequency (MHz)	Allowable MPE ($\mu\text{W}/\text{cm}^2$)	Calculated % MPE
Sprint 850 MHz CDMA	1	437.55	185	0.49	850 MHz	567	0.09%
Sprint 850 MHz LTE	2	437.55	185	0.98	850 MHz	567	0.17%
Sprint 1900 MHz (PCS) CDMA	5	622.47	185	3.49	1900 MHz (PCS)	1000	0.35%
Sprint 1900 MHz (PCS) LTE	2	1,556.18	185	3.49	1900 MHz (PCS)	1000	0.35%
Sprint 2500 MHz (BRS) LTE	8	778.09	185	6.98	2500 MHz (BRS)	1000	0.70%
						Total:	1.66%

Summary

All calculations performed for this analysis yielded results that were **within** the allowable limits for general population exposure to RF Emissions.

The anticipated maximum composite contributions from the SPRINT facility as well as the site composite emissions value with regards to compliance with FCC's allowable limits for general population exposure to RF Emissions are shown here:

SPRINT Sector	Power Density Value (%)
Sector A:	1.66 %
Sector B:	1.66 %
Sector C:	1.66 %
SPRINT Maximum Total (per sector):	1.66 %
Site Total:	2.79 %
Site Compliance Status:	COMPLIANT

The anticipated composite MPE value for this site assuming all carriers present is **2.79 %** of the allowable FCC established general population limit sampled at the ground level. This is based upon values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.



Tower Engineering Solutions

Phone (972) 483-0607, Fax (972) 975-9615
8445 Freeport Parkway, Suite 375, Irving, Texas 75063

Structural Analysis Report

Existing 185 ft. SUMMIT Monopole
Customer Name: SBA Communications Corp
Customer Site Number: CT04169-A-2
Customer Site Name: Higganum
Carrier Name: Sprint Nextel
Carrier Site ID / Name: CT33XC545 / Higganum
Site Location: 285 Chamberlain Hill Road
Higganum, Connecticut
Middlesex County
Latitude: 41.501764
Longitude: -72.618694

Analysis Result:

Max Structural Usage: 52.8% [Pass]
Max Foundation Usage: 36.4% [Pass]
Report Prepared By: Walter Velez



Introduction

The purpose of this report is to summarize the analysis results on the 185 ft. SUMMIT Monopole to support the proposed antennas and transmission lines in addition to those currently installed. Any modification listed under Sources of Information was assumed completed and was included in this analysis.

Sources of Information

Tower Drawings	Original structural design report prepared by Summit Manufacturing, LLC & Paul J. Ford and Company. Dated 11-29-1999. SUMMIT Job No 5350. Job No 29299-805. Previous structural report prepared by FDH Engineering, Inc. Dated 04-11-2014. Project No 1463AY1400.
Foundation Drawing	Original foundation design prepared by Summit Manufacturing, LLC & Paul J. Ford and Company. Dated 11-29-1999. SUMMIT Job No 5350. Job No 29299-805.
Geotechnical Report	Geotechnical report prepared by Criscuolo Shepard Associates, P.C. Dated 06-21-1999. File No 99137.
Modification Drawings	N/A

Analysis Criteria

The rigorous analysis was performed in accordance with the requirements and stipulations of the ANSI/TIA-222-G. In accordance with this standard, the structure was analyzed using **TESPoles**, a proprietary analysis software. The program considers the structure as an elastic 3-D model with second-order effects and temperature effects incorporated in the analysis. The analysis was performed using multiple wind directions.

Wind Speed Used in the Analysis: (Based on IBC 2012)	Ultimate Design Wind Speed $V_{ult} = 127.0$ mph (3-Sec. Gust) Nominal Design Wind Speed $V_{asd} = 98.0$ mph (3-Sec. Gust)
Wind Speed with Ice:	50 mph (3-Sec. Gust) with 3/4" radial ice concurrent
Operational Wind Speed:	60 mph + 0" Radial ice
Standard/Codes:	ANSI/TIA-222-G, 2012 IBC & 2016 Connecticut State Building Code
Exposure Category:	B
Structure Class:	II
Topographic Category:	1
Crest Height:	0 ft.
Seismic Parameters:	$S_s = 0.179$, $S_1 = 0.062$

Existing Antennas, Mounts and Transmission Lines

The table below summarizes the antennas, mounts and transmission lines that were considered in the analysis as existing on the tower.

Items	Elevation (ft.)	Qty.	Antenna Descriptions	Mount Type & Qty.	Transmission Lines	Owner
1	185.0	3	RFS APXVSP18-C-A20 - Panel	Low Profile Platform	(4) 1-1/4" Hybrid	Sprint Nextel
2		3	RFS APXVTM14-C-I20 - Panel			
3		4	RFS ACU-A20-N RET			
4		3	ALU TD-RRH8x20-25			
5		3	ALU 1900 MHz			
6		3	ALU 800 MHz			
7		3	ALU 800 MHz Filter			
8	177.5	6	Ericsson RRU11	Collar Mount (Andrew MTC 3335)	(12) 1 5/8"; [(2) 1/2" DC Power & (1) 3/8" Fiber; Inside (1) 3" Innerduct]	AT&T
9		1	Raycap DC6-48-60-18-8F			
10	175.0	6	Powerwave 7770 - Panel	Low Profile Platform		
11		3	KMW AM-X-CD-16-65-00T-RET - Panel			
12		6	Powerwave LGP13519			
13		12	Powerwave LGP21401			

All transmission lines are considered running inside of the pole shafts.

Analysis Results

The results of the structural analysis, performed for the wind and ice loading and antenna equipment as defined above, are summarized as the following:

	Pole shafts	Anchor Bolts	Base Plate
Max. Usage:	52.5%	30.7%	52.8%
Pass/Fail	Pass	Pass	Pass

Foundations

	Moment (Kip-Ft)	Shear (Kips)	Axial (Kips)
Original Design Reactions	5025.0	39.0	41.0
Analysis Reactions	2779.2	22.3	48.8
Factored Reactions*	6783.8	52.7	55.4

* Per section 15.5.1 of the TIA-222-G standard, factored reactions were obtained by multiplying a 1.35 factor to the original design reactions.

The foundation has been investigated using the supplied documents and soils report and was found adequate. Therefore, no modification to the foundation will be required. Some geotechnical soil parameters were obtained from the original foundation calculations included with the referenced tower and foundation design drawings.

Operational Condition (Rigidity):

Operational characteristics of the tower are found to be within the limits prescribed by ANSI/TIA-222-G for the installed antennas. The maximum twist/sway at the elevation of the proposed equipment is 1.1430 degrees under the operational wind speed as specified in the Analysis Criteria.

Conclusions

Based on the analysis results, the existing structure and its foundation were found to be adequate to safely support the existing and proposed equipment and meet the minimum requirements per the ANSI/TIA-222-G standards, the 2012 IBC and the 2016 Connecticut State Building Code under the design basic wind speed specified in the Analysis Criteria.

Standard Conditions

1. This analysis was performed based on the information supplied to **(TES) Tower Engineering Solutions, LLC**. Verification of the information provided was not included in the Scope of Work for **TES**. The accuracy of the analysis is dependent on the accuracy of the information provided.
2. The analysis is based on the presumption that the tower members and components along with any existing reinforcement items have been correctly and properly designed, manufactured, installed and maintained.
3. All the existing structural members were assumed to be in good condition with no physical damage or deterioration associated with corrosion.
4. An initial tension of 10% of the break strength on all the existing guy wires was assumed in all the structural analyses of guyed towers unless different values were provided by the client. **TES** cannot take responsibility for the deviations in the analysis results because of differences in the initial tension forces of the existing guy wires.
5. Secondary component or connection secondary components, welds and bolts are assumed to be able to carry their intended original design loads. **TES** cannot take responsibility for verification of the adequacy on the connections, bolts and welds present in the structure.
6. The analyses will be performed based on the codes as specified by the client or based on the best knowledge of the engineering staff of **TES**. In the absence of information to the contrary, all work will be performed in accordance with the latest relevant revision of ANSI/TIA-222. If wind speed and/or ice loads are different from the minimum values recommended by the EIA/TIA-222 standard or other codes, **TES** should be notified in writing and the applicable minimum values provided by the client.
7. The configuration of the existing mounts, antennas, coax and other appurtenances were supplied by the customer for the current structural analysis. **TES** has not visited the tower site to verify the adequacy of the information provided. If there is any discrepancy found in the report regarding the existing conditions, **TES** should be notified immediately to evaluate the effect of the discrepancy on the analysis results.
8. The client will assume responsibility for rework associated with the differences in initially provided information, including tower and foundation information, existing and/or proposed equipment and transmission lines.
9. If a feasibility analysis was performed, final acceptance of changed conditions shall be based upon a rigorous structural analysis.

Usage Diagram - Max Ratio 52.48% at 94.0ft

Structure: CT04169-A-2-SBA
Site Name: Higganum
Height: 185.00 (ft)
Base Elev: 0.000 (ft)

Code: EIA/TIA-222-G
Exposure: B
Gh: 1.1


10/31/2017



Page: 1


Dead Load Factor: 1.20
Wind Load Factor: 1.60

Load Case : 1.2D + 1.6W 98 mph Wind



Iterations: 26

Copyright © 2017 by Tower Engineering Solutions, LLC. All rights reserved.

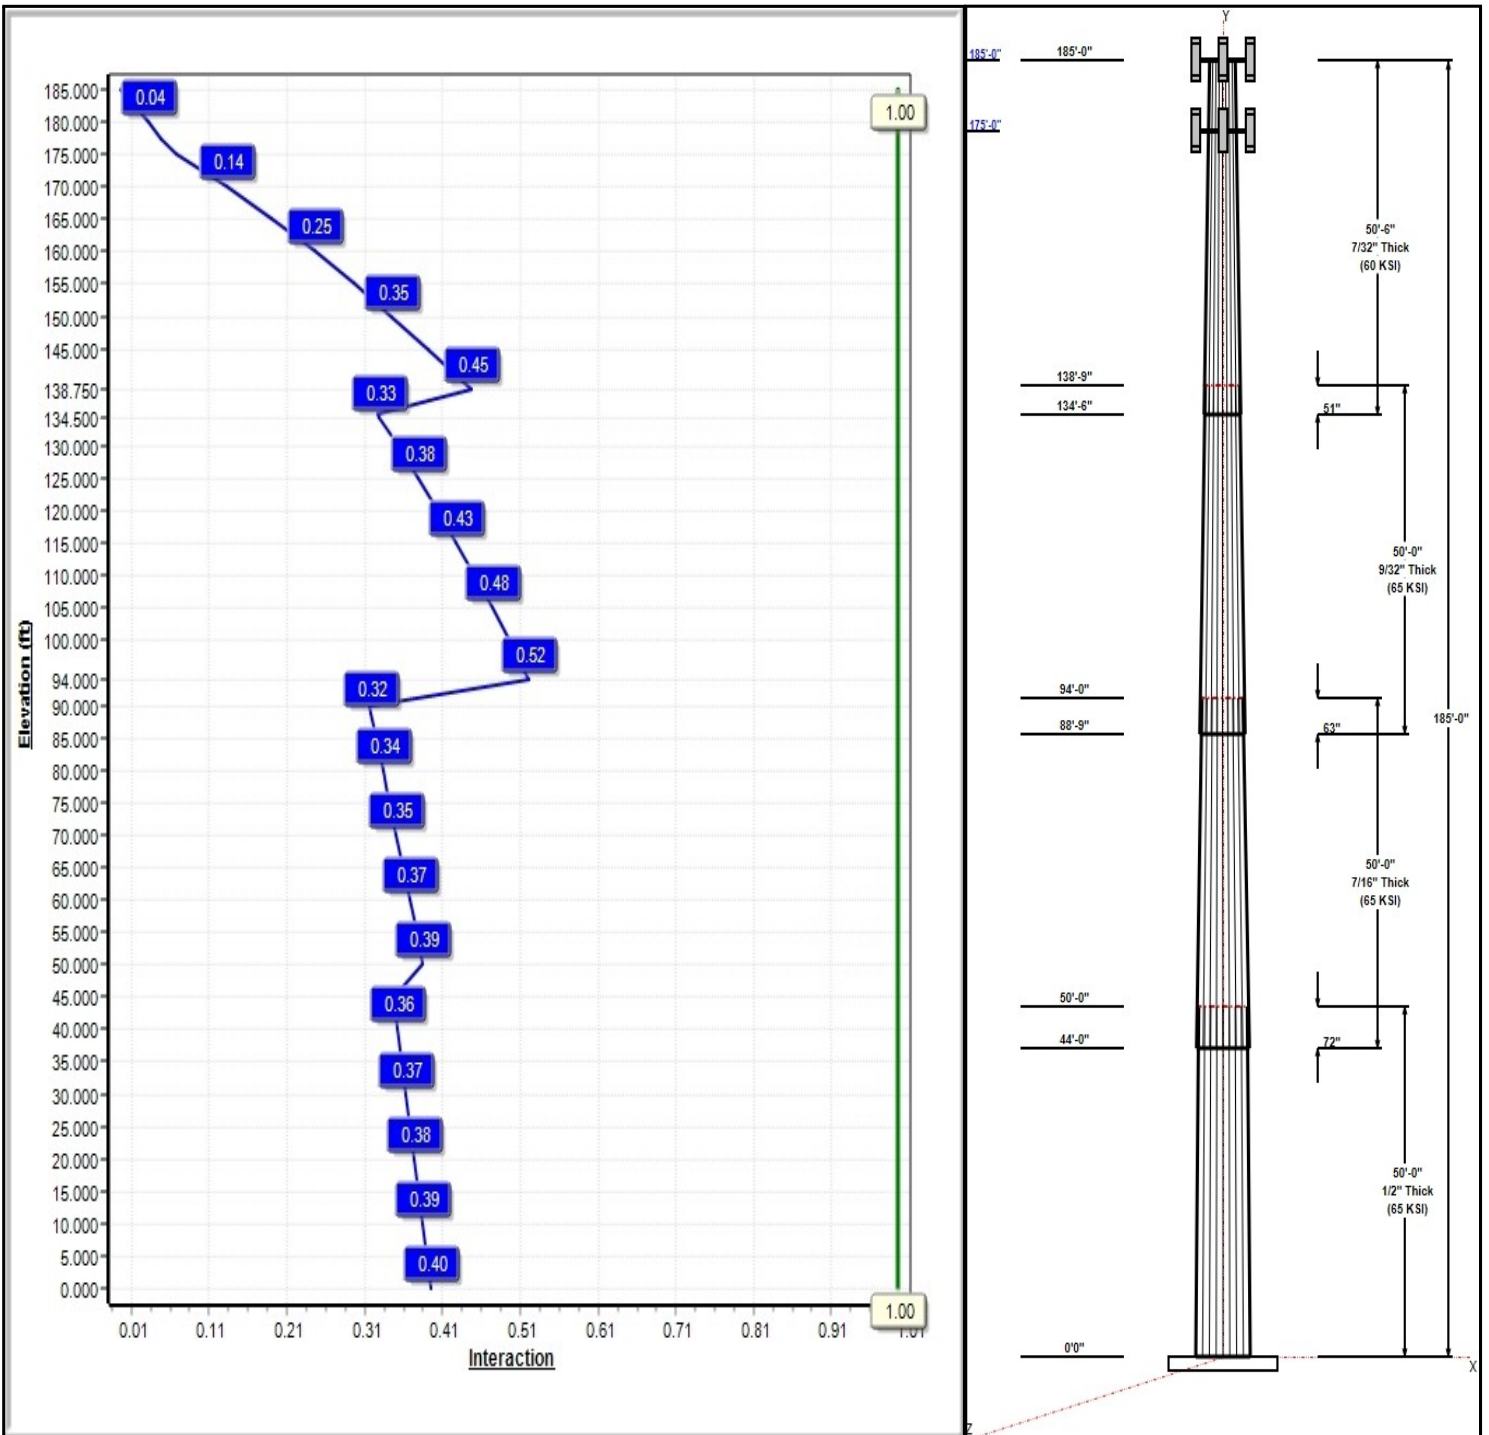

Structure: CT04169-A-2-SBA

Type: Tapered
Site Name: Higganum
Height: 185.00 (ft)
Base Elev: 0.00 (ft)

Base Shape: 18 Sided
Taper: 0.18003

10/31/2017



Page: 2

Shaft Properties

Seq	Length (ft)	Top (in)	Bottom (in)	Thick (in)	Joint Type	Taper	Grade (ksi)
1	50.00	46.43	55.43	0.500		0.18003	65
2	50.00	39.38	48.38	0.438	Slip	0.18003	65
3	50.00	31.89	40.89	0.281	Slip	0.18003	65
4	50.50	24.00	33.09	0.219	Slip	0.18003	60

Discrete Appurtenances

Attach Elev (ft)	Force Elev (ft)	Qty	Description	Carrier
185.00	188.50	1	Lightning Rod	---
185.00	185.00	3	RFS APXVSP18-C-A20	Sprint Nextel
185.00	185.00	3	RFS APXVTM14-C-I20	Sprint Nextel
185.00	185.00	4	RFS ACU-A20-N RET	Sprint Nextel
185.00	185.00	3	ALU TD-RRH8x20-25	Sprint Nextel
185.00	185.00	3	ALU 1900 MHz RRH	Sprint Nextel
185.00	185.00	3	ALU 800 MHz RRH	Sprint Nextel
185.00	185.00	3	ALU 800 MHz Filter	Sprint Nextel
185.00	185.00	1	Low Profile Platform	Sprint Nextel
177.50	177.50	6	Ericsson RRU11	AT&T
177.50	177.50	1	Raycap DC6-48-60-18-8F	AT&T
177.50	177.50	1	Collar Mount (Andrew)	AT&T
175.00	175.00	1	Low Profile Platform	AT&T
175.00	175.00	6	Powerwave LGP13519	AT&T
175.00	175.00	12	Powerwave LGP21401	AT&T
175.00	175.00	6	Powerwave 7770	AT&T
175.00	175.00	3	KMW	AT&T

Linear Appurtenances

Elev From (ft)	Elev To (ft)	Placement	Description	Carrier
3.00	185.00	Inside	1-1/4" Hybrid	Sprint Nextel
3.00	175.00	Inside	1 5/8" Coax	AT&T
3.00	175.00	Inside	1/2" DC Power	AT&T
3.00	175.00	Inside	3" Innerduct	AT&T
3.00	175.00	Inside	3/8" Fiber	AT&T

Anchor Bolts


Qty	Specifications	Grade (ksi)	Arrangement
28	2.25" 18J	75.0	Cluster

Base Plate

Thickness (in)	Specifications (in)	Grade (ksi)	Geometry
2.7500	67.0	50.0	Clipped

Reactions

Load Case	Moment (FT-Kips)	Shear (Kips)	Axial (Kips)
1.2D + 1.6W 98 mph Wind	2779.2	22.3	48.8
0.9D + 1.6W 98 mph Wind	2749.2	22.3	36.6
1.2D + 1.0Di + 1.0Wi 50 mph Wind	825.2	6.7	69.6
1.2D + 1.0E	206.8	1.5	48.8
0.9D + 1.0E	204.3	1.5	36.6
1.0D + 1.0W 60 mph Wind	646.8	5.2	40.7

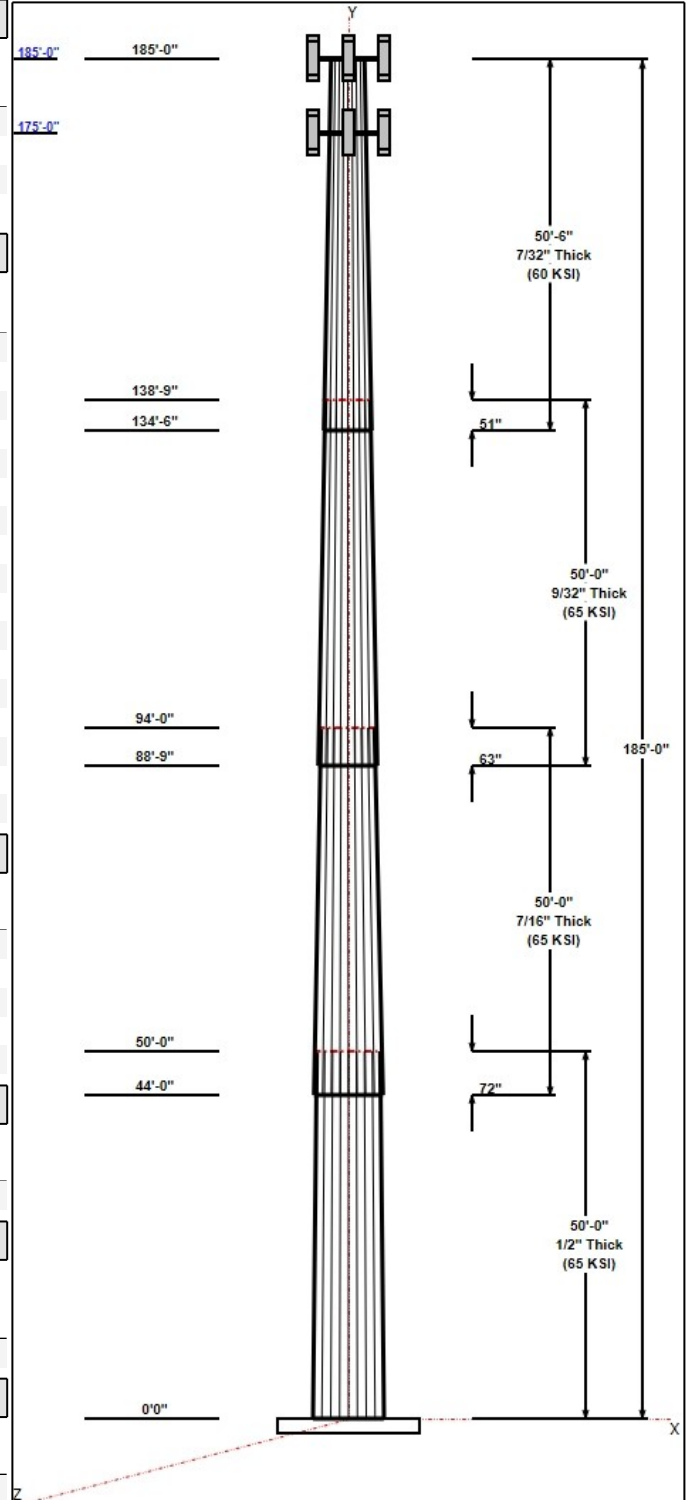


Structure: CT04169-A-2-SBA - Coax Line Placement

Type: Monopole
Site Name: Higganum
Height: 185.00 (ft)

10/31/2017



Page: 3

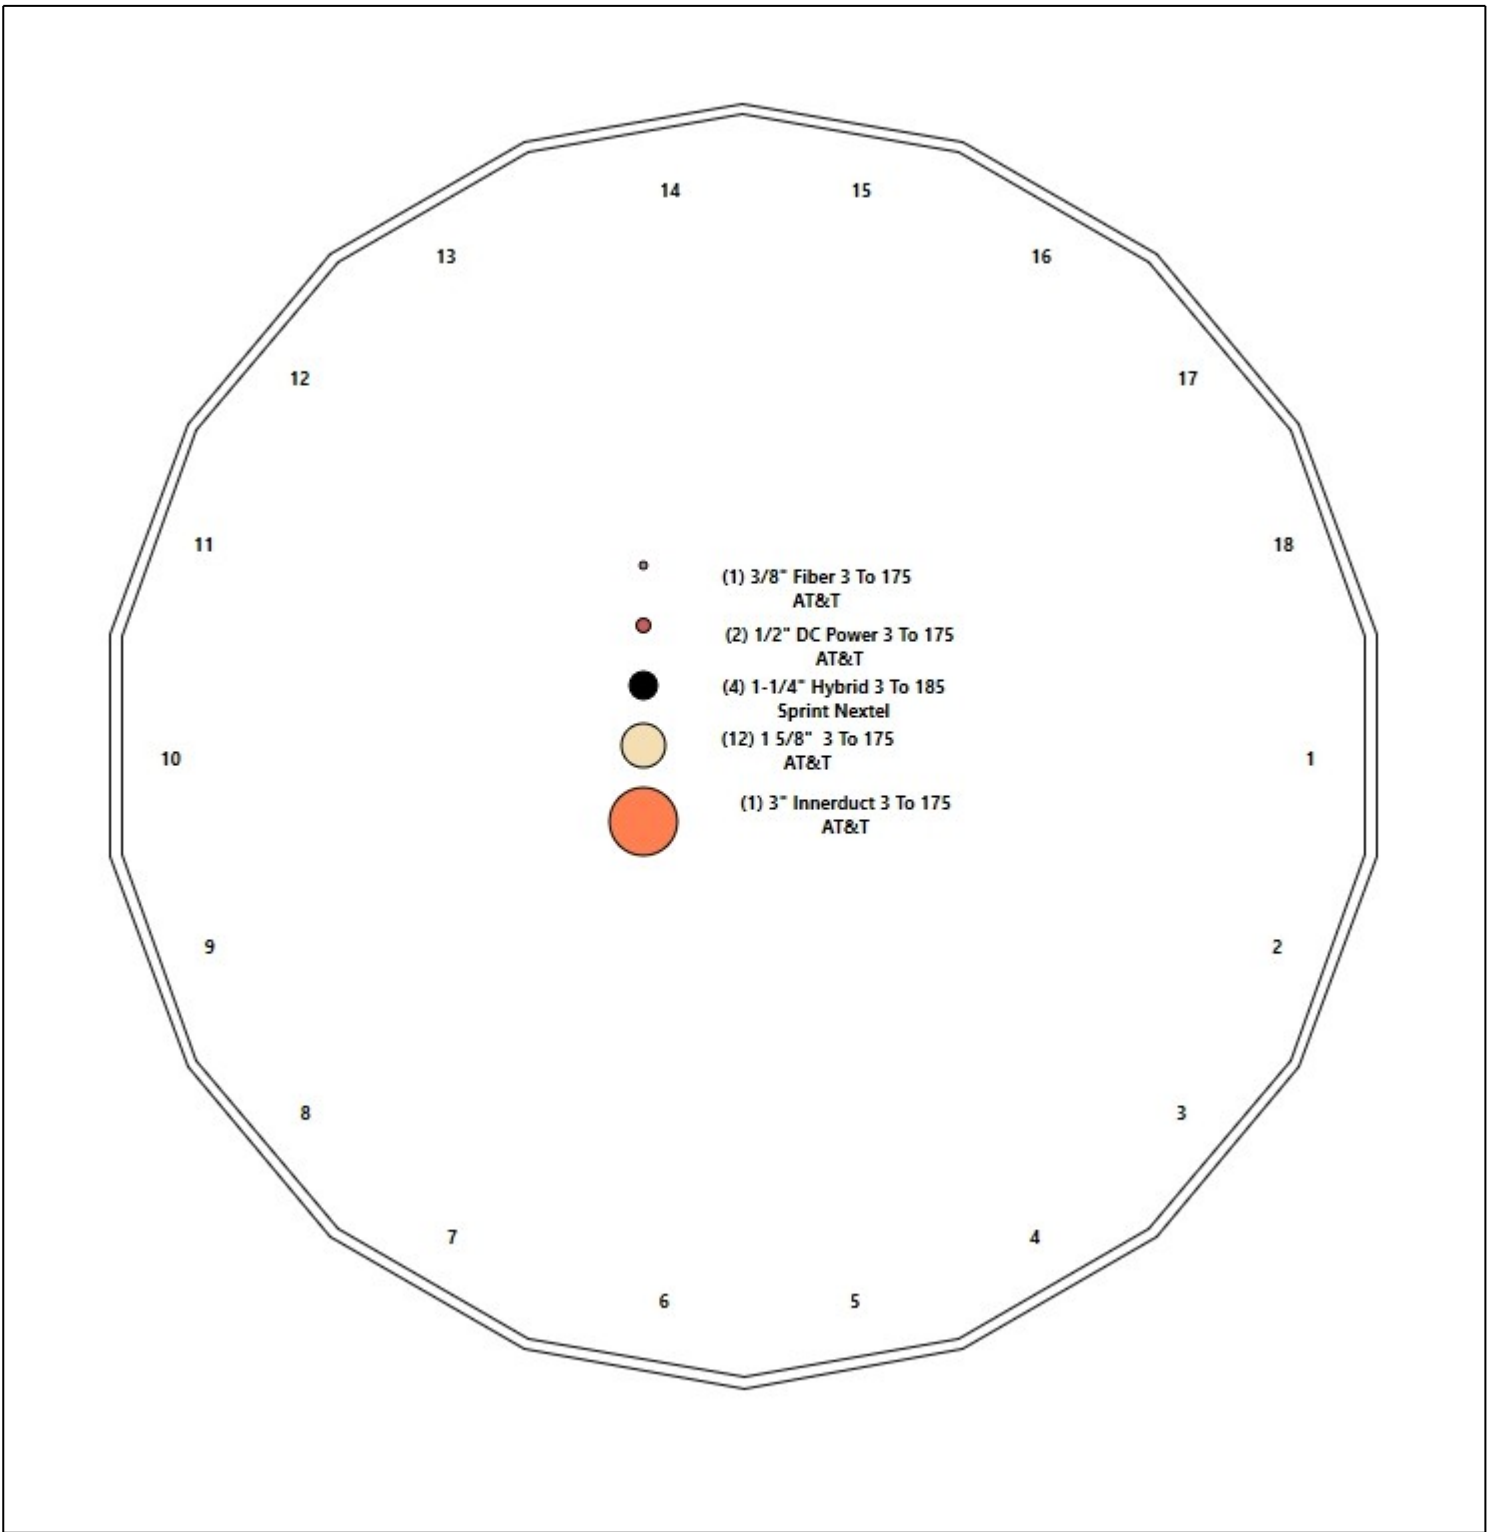

Shaft Properties

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 4

Sec. No.	Shape	Length (ft)	Thick (in)	Fy (ksi)	Joint Type	Overlap (in)	Weight (lb)
1	18	50.000	0.5000	65		0.00	13,616
2	18	50.000	0.4375	65	Slip	72.00	10,264
3	18	50.000	0.2813	65	Slip	63.00	5,484
4	18	50.500	0.2188	60	Slip	51.00	3,380
Total Shaft Weight:							32,744

Bottom

Top

Sec. No.	Dia (in)	Elev (ft)	Area (sqin)	Ix (in^4)	W/t Ratio	D/t Ratio	Dia (in)	Elev (ft)	Area (sqin)	Ix (in^4)	W/t Ratio	D/t Ratio	Taper
1	55.43	0.00	87.17	33230.98	18.14	110.86	46.43	50.00	72.89	19425.1	14.96	92.86	0.180027
2	48.38	44.00	66.58	19336.95	18.09	110.59	39.38	94.00	54.08	10362.7	14.46	90.02	0.180027
3	40.89	88.75	36.25	7552.64	24.23	145.39	31.89	138.75	28.21	3561.29	18.58	113.3	0.180027
4	33.09	134.5	22.82	3115.98	25.26	151.27	24.00	185.00	16.51	1179.77	17.93	109.7	0.180027

Load Summary

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 5

Discrete Appurtenances

No.	Elev (ft)	Description	Qty	No Ice			Ice			Hor. Ecc. (ft)	Vert Ecc (ft)
				Weight (lb)	CaAa (sf)	CaAa Factor	Weight (lb)	CaAa (sf)	CaAa Factor		
1	185.00	Lightning Rod	1	35.00	1.05	1.00	67.08	3.474	1.00	0.00	3.50
2	185.00	RFS APXVSP18-C-A20	3	57.00	8.02	0.83	233.51	10.873	0.83	0.00	0.00
3	185.00	RFS APXVTM14-C-I20	3	55.00	6.34	0.78	219.51	7.479	0.78	0.00	0.00
4	185.00	RFS ACU-A20-N RET	4	1.00	0.12	0.60	5.39	0.380	0.60	0.00	0.00
5	185.00	ALU TD-RRH8x20-25	3	70.00	4.05	0.67	183.30	4.882	0.67	0.00	0.00
6	185.00	ALU 1900 MHz RRH	3	60.00	2.38	0.67	212.01	3.269	0.67	0.00	0.00
7	185.00	ALU 800 MHz RRH	3	53.00	2.13	0.67	128.53	3.129	0.67	0.00	0.00
8	185.00	ALU 800 MHz Filter	3	8.80	0.67	0.60	21.34	0.984	0.60	0.00	0.00
9	185.00	Low Profile Platform	1	1500.00	22.00	1.00	2836.65	40.036	1.00	0.00	0.00
10	177.50	Ericsson RRU11	6	50.70	2.57	0.71	133.92	3.233	0.71	0.00	0.00
11	177.50	Raycap DC6-48-60-18-8F	1	31.80	2.20	0.90	94.67	3.265	0.90	0.00	0.00
12	177.50	Collar Mount (Andrew MTC 3335)	1	150.00	5.00	0.75	277.79	8.550	0.75	0.00	0.00
13	175.00	Low Profile Platform	1	1500.00	22.00	0.00	2829.24	39.936	0.00	0.00	0.00
14	175.00	Powerwave LGP13519	6	5.30	0.13	0.60	14.95	0.306	0.60	0.00	0.00
15	175.00	Powerwave LGP21401	12	14.10	1.10	0.60	39.49	1.824	0.60	0.00	0.00
16	175.00	Powerwave 7770	6	35.00	5.51	0.77	172.76	6.583	0.77	0.00	0.00
17	175.00	KMW AM-X-CD-16-65-00T-RET	3	48.50	8.02	0.79	213.30	10.857	0.79	0.00	0.00
Totals:			60	4,992.90			12,165.14				

Linear Appurtenances

Bottom Elev. (ft)	Top Elev. (ft)	Description	Exposed Width	Exposed
3.00	185.00	(4) 1-1/4" Hybrid	0.00	Inside
3.00	175.00	(12) 1 5/8" Coax	0.00	Inside
3.00	175.00	(2) 1/2" DC Power	0.00	Inside
3.00	175.00	(1) 3" Innerduct	0.00	Inside
3.00	175.00	(1) 3/8" Fiber	0.00	Inside

Shaft Section Properties

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 6

Increment Length: 5 (ft)

Elev (ft)	Description	Thick (in)	Dia (in)	Area (in^2)	Ix (in^4)	W/t Ratio	D/t Ratio	Fpy (ksi)	S (in^3)	Weight (lb)
0.00		0.5000	55.430	87.171	33231.0	18.14	110.86	80.1	1180.	0.0
5.00		0.5000	54.530	85.742	31623.9	17.82	109.06	80.4	1142.	1471.0
10.00		0.5000	53.630	84.314	30069.6	17.50	107.26	80.8	1104.	1446.7
15.00		0.5000	52.730	82.885	28567.0	17.18	105.46	81.2	1067.	1422.4
20.00		0.5000	51.829	81.457	27115.3	16.87	103.66	81.6	1030.	1398.1
25.00		0.5000	50.929	80.028	25713.7	16.55	101.86	81.9	994.4	1373.7
30.00		0.5000	50.029	78.600	24361.2	16.23	100.06	82.3	959.1	1349.4
35.00		0.5000	49.129	77.172	23056.9	15.91	98.26	82.5	924.4	1325.1
40.00		0.5000	48.229	75.743	21800.1	15.60	96.46	82.5	890.3	1300.8
44.00	Bot - Section 2	0.5000	47.509	74.600	20828.2	15.34	95.02	82.5	863.5	1023.2
45.00		0.5000	47.329	74.315	20589.8	15.28	94.66	82.5	856.9	479.5
50.00	Top - Section 1	0.4375	47.304	65.077	18059.3	17.65	108.12	0.0	0.0	2370.1
55.00		0.4375	46.404	63.827	17038.6	17.29	106.07	81.1	723.2	1096.6
60.00		0.4375	45.503	62.577	16057.1	16.93	104.01	81.5	695.0	1075.3
65.00		0.4375	44.603	61.327	15114.0	16.57	101.95	81.9	667.4	1054.1
70.00		0.4375	43.703	60.078	14208.6	16.20	99.89	82.3	640.4	1032.8
75.00		0.4375	42.803	58.828	13340.1	15.84	97.84	82.5	613.9	1011.5
80.00		0.4375	41.903	57.578	12507.7	15.48	95.78	82.5	587.9	990.3
85.00		0.4375	41.003	56.328	11710.7	15.11	93.72	82.5	562.5	969.0
88.75	Bot - Section 3	0.4375	40.328	55.390	11135.7	14.84	92.18	82.5	543.9	712.8
90.00		0.4375	40.103	55.078	10948.3	14.75	91.66	82.5	537.7	388.7
94.00	Top - Section 2	0.2813	39.945	35.406	7037.5	23.63	142.03	0.0	0.0	1229.2
95.00		0.2813	39.765	35.245	6942.1	23.52	141.39	73.7	343.9	120.2
100.00		0.2813	38.865	34.442	6478.0	22.96	138.19	74.4	328.3	592.8
105.00		0.2813	37.965	33.638	6035.1	22.39	134.99	75.1	313.1	579.2
110.00		0.2813	37.065	32.835	5612.9	21.83	131.78	75.7	298.3	565.5
115.00		0.2813	36.164	32.031	5210.8	21.26	128.58	76.4	283.8	551.8
120.00		0.2813	35.264	31.228	4828.5	20.70	125.38	77.1	269.7	538.1
125.00		0.2813	34.364	30.424	4465.2	20.13	122.18	77.7	255.9	524.5
130.00		0.2813	33.464	29.621	4120.7	19.57	118.98	78.4	242.5	510.8
134.50	Bot - Section 4	0.2813	32.654	28.898	3826.2	19.06	116.10	79.0	230.8	448.0
135.00		0.2813	32.564	28.817	3794.4	19.00	115.78	79.0	229.5	87.9
138.75	Top - Section 3	0.2188	32.326	22.292	2903.4	24.65	147.78	0.0	0.0	651.3
140.00		0.2188	32.101	22.136	2842.8	24.47	146.75	68.1	174.4	94.5
145.00		0.2188	31.201	21.511	2608.8	23.74	142.63	68.8	164.7	371.3
150.00		0.2188	30.301	20.886	2387.9	23.01	138.52	69.6	155.2	360.7
155.00		0.2188	29.401	20.261	2179.9	22.29	134.40	70.4	146.0	350.0
160.00		0.2188	28.501	19.636	1984.4	21.56	130.29	71.1	137.1	339.4
165.00		0.2188	27.601	19.011	1800.9	20.84	126.17	71.9	128.5	328.8
170.00		0.2188	26.700	18.386	1629.0	20.11	122.06	72.6	120.2	318.1
175.00		0.2188	25.800	17.761	1468.5	19.39	117.94	73.4	112.1	307.5
177.50		0.2188	25.350	17.448	1392.3	19.02	115.89	73.8	108.2	149.8
180.00		0.2188	24.900	17.136	1318.9	18.66	113.83	74.1	104.3	147.1
185.00		0.2188	24.000	16.511	1179.8	17.93	109.71	74.9	96.8	286.2

32743.5

Wind Loading - Shaft


Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 7

Load Case: 1.2D + 1.6W 98 mph Wind

Dead Load Factor 1.20
Wind Load Factor 1.60



Iterations 26

Elev (ft)	Description	Kzt	Kz	qz (psf)	qzGh (psf)	C (mph-ft)	Cf	Ice Thick (in)	Tributary (ft)	Aa (sf)	CfAa (sf)	Wind Force X (lb)	Dead Load Ice (lb)	Tot Dead Load (lb)
0.00		1.00	0.70	16.350	17.98	384.58	0.650	0.000	0.00	0.000	0.00	0.0	0.0	0.0
5.00		1.00	0.70	16.350	17.98	378.34	0.650	0.000	5.00	23.262	15.12	435.1	0.0	1765.2
10.00		1.00	0.70	16.350	17.98	372.09	0.650	0.000	5.00	22.881	14.87	428.0	0.0	1736.0
15.00		1.00	0.70	16.350	17.98	365.84	0.650	0.000	5.00	22.500	14.63	420.8	0.0	1706.8
20.00		1.00	0.70	16.350	17.98	359.60	0.650	0.000	5.00	22.119	14.38	413.7	0.0	1677.7
25.00		1.00	0.70	16.350	17.98	353.35	0.650	0.000	5.00	21.738	14.13	406.6	0.0	1648.5
30.00		1.00	0.70	16.364	18.00	347.26	0.650	0.000	5.00	21.357	13.88	399.8	0.0	1619.3
35.00		1.00	0.73	17.100	18.81	348.60	0.650	0.000	5.00	20.977	13.63	410.4	0.0	1590.2
40.00		1.00	0.76	17.765	19.54	348.80	0.650	0.000	5.00	20.596	13.39	418.6	0.0	1561.0
44.00	Bot - Section 2	1.00	0.78	18.256	20.08	348.31	0.650	0.000	4.00	16.202	10.53	338.4	0.0	1227.8
45.00		1.00	0.79	18.374	20.21	348.10	0.650	0.000	1.00	4.087	2.66	85.9	0.0	575.4
50.00	Top - Section 1	1.00	0.81	18.935	20.83	346.66	0.650	0.000	5.00	20.204	13.13	437.7	0.0	2844.1
55.00		1.00	0.83	19.458	21.40	351.22	0.650	0.000	5.00	19.823	12.89	441.3	0.0	1315.9
60.00		1.00	0.85	19.948	21.94	348.72	0.650	0.000	5.00	19.443	12.64	443.7	0.0	1290.4
65.00		1.00	0.87	20.409	22.45	345.75	0.650	0.000	5.00	19.062	12.39	445.1	0.0	1264.9
70.00		1.00	0.89	20.846	22.93	342.38	0.650	0.000	5.00	18.681	12.14	445.5	0.0	1239.3
75.00		1.00	0.91	21.261	23.39	338.65	0.650	0.000	5.00	18.300	11.90	445.1	0.0	1213.8
80.00		1.00	0.93	21.656	23.82	334.60	0.650	0.000	5.00	17.919	11.65	443.9	0.0	1188.3
85.00		1.00	0.94	22.035	24.24	330.26	0.650	0.000	5.00	17.538	11.40	442.1	0.0	1162.8
88.75	Bot - Section 3	1.00	0.96	22.308	24.54	326.83	0.650	0.000	3.75	12.904	8.39	329.3	0.0	855.3
90.00		1.00	0.96	22.398	24.64	325.66	0.650	0.000	1.25	4.313	2.80	110.5	0.0	466.4
94.00	Top - Section 2	1.00	0.97	22.678	24.95	321.80	0.650	0.000	4.00	13.642	8.87	353.9	0.0	1475.0
95.00		1.00	0.97	22.746	25.02	325.42	0.650	0.000	1.00	3.372	2.19	87.8	0.0	144.2
100.00		1.00	0.99	23.082	25.39	320.39	0.650	0.000	5.00	16.634	10.81	439.2	0.0	711.4
105.00		1.00	1.00	23.406	25.75	315.16	0.650	0.000	5.00	16.253	10.56	435.2	0.0	695.0
110.00		1.00	1.02	23.719	26.09	309.74	0.650	0.000	5.00	15.872	10.32	430.7	0.0	678.6
115.00		1.00	1.03	24.022	26.42	304.14	0.650	0.000	5.00	15.491	10.07	425.7	0.0	662.2
120.00		1.00	1.04	24.316	26.75	298.38	0.650	0.000	5.00	15.111	9.82	420.3	0.0	645.8
125.00		1.00	1.05	24.602	27.06	292.46	0.650	0.000	5.00	14.730	9.57	414.6	0.0	629.4
130.00		1.00	1.07	24.879	27.37	286.40	0.650	0.000	5.00	14.349	9.33	408.4	0.0	613.0
134.50	Bot - Section 4	1.00	1.08	25.122	27.63	280.83	0.650	0.000	4.50	12.588	8.18	361.8	0.0	537.6
135.00		1.00	1.08	25.149	27.66	280.21	0.650	0.000	0.50	1.398	0.91	40.2	0.0	105.5
138.75	Top - Section 3	1.00	1.09	25.346	27.88	275.47	0.650	0.000	3.75	10.365	6.74	300.5	0.0	781.6
140.00		1.00	1.09	25.411	27.95	277.66	0.650	0.000	1.25	3.407	2.21	99.1	0.0	113.4
145.00		1.00	1.10	25.667	28.23	271.23	0.650	0.000	5.00	13.391	8.70	393.2	0.0	445.6
150.00		1.00	1.11	25.917	28.51	264.69	0.650	0.000	5.00	13.011	8.46	385.8	0.0	432.8
155.00		1.00	1.12	26.161	28.78	258.03	0.650	0.000	5.00	12.630	8.21	378.0	0.0	420.0
160.00		1.00	1.13	26.399	29.04	251.27	0.650	0.000	5.00	12.249	7.96	369.9	0.0	407.3
165.00		1.00	1.14	26.633	29.30	244.40	0.650	0.000	5.00	11.868	7.71	361.6	0.0	394.5
170.00		1.00	1.15	26.861	29.55	237.44	0.650	0.000	5.00	11.487	7.47	353.0	0.0	381.8
175.00	Appurtenance(s)	1.00	1.16	27.084	29.79	230.39	0.650	0.000	5.00	11.106	7.22	344.1	0.0	369.0
177.50	Appurtenance(s)	1.00	1.16	27.194	29.91	226.83	0.650	0.000	2.50	5.410	3.52	168.3	0.0	179.7
180.00		1.00	1.17	27.303	30.03	223.25	0.650	0.000	2.50	5.315	3.45	166.0	0.0	176.5
185.00	Appurtenance(s)	1.00	1.18	27.518	30.27	216.02	0.650	0.000	5.00	10.345	6.72	325.7	0.0	343.5
Totals:								185.00			15,204.4	39,292.2		

Discrete Appurtenance Forces


Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 8

Load Case: 1.2D + 1.6W 98 mph Wind

Dead Load Factor 1.20
Wind Load Factor 1.60



Iterations 26

No.	Elev (ft)	Description	Qty	qz (psf)	qzGh (psf)	CaAa x Ka	Ka	Total CaAa (sf)	Dead Load (lb)	Horiz Ecc (ft)	Vert Ecc (ft)	Wind FX (lb)	Mom Y (lb-ft)	Mom Z (lb-ft)
1	185.00	Lightning Rod	1	27.665	30.432	1.00	1.00	1.05	42.00	0.000	3.500	51.13	0.00	178.94
2	185.00	ALU 800 MHz Filter	3	27.518	30.269	0.48	0.80	0.96	31.68	0.000	0.000	46.73	0.00	0.00
3	185.00	ALU 800 MHz RRH	3	27.518	30.269	0.54	0.80	3.43	190.80	0.000	0.000	165.88	0.00	0.00
4	185.00	ALU 1900 MHz RRH	3	27.518	30.269	0.54	0.80	3.83	216.00	0.000	0.000	185.35	0.00	0.00
5	185.00	ALU TD-RRH8x20-25	3	27.518	30.269	0.54	0.80	6.51	252.00	0.000	0.000	315.40	0.00	0.00
6	185.00	RFS ACU-A20-N RET	4	27.518	30.269	0.48	0.80	0.23	4.80	0.000	0.000	11.16	0.00	0.00
7	185.00	RFS APXVTM14-C-I20	3	27.518	30.269	0.70	0.90	13.35	198.00	0.000	0.000	646.65	0.00	0.00
8	185.00	RFS APXVSP18-C-A20	3	27.518	30.269	0.75	0.90	17.97	205.20	0.000	0.000	870.44	0.00	0.00
9	185.00	Low Profile Platform	1	27.518	30.269	1.00	1.00	22.00	1800.00	0.000	0.000	1065.48	0.00	0.00
10	177.50	Collar Mount (Andrew	1	27.194	29.913	0.56	0.75	2.81	180.00	0.000	0.000	134.61	0.00	0.00
11	177.50	Raycap DC6-48-60-18-8F	1	27.194	29.913	0.72	0.80	1.58	38.16	0.000	0.000	75.81	0.00	0.00
12	177.50	Ericsson RRU11	6	27.194	29.913	0.57	0.80	8.76	365.04	0.000	0.000	419.20	0.00	0.00
13	175.00	KMW	3	27.084	29.792	0.63	0.80	15.21	174.60	0.000	0.000	724.83	0.00	0.00
14	175.00	Powerwave 7770	6	27.084	29.792	0.62	0.80	20.36	252.00	0.000	0.000	970.76	0.00	0.00
15	175.00	Powerwave LGP21401	12	27.084	29.792	0.48	0.80	6.34	203.04	0.000	0.000	302.02	0.00	0.00
16	175.00	Powerwave LGP13519	6	27.084	29.792	0.48	0.80	0.37	38.16	0.000	0.000	17.85	0.00	0.00
17	175.00	Low Profile Platform	1	27.084	29.792	0.00	1.00	22.00	1800.00	0.000	0.000	1048.69	0.00	0.00

Totals: **5,991.48** **7,051.98**

Total Applied Force Summary


Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 9

Load Case: 1.2D + 1.6W 98 mph Wind

Dead Load Factor 1.20
Wind Load Factor 1.60



Iterations 26

Elev (ft)	Description	Lateral FX (-) (lb)	Axial FY (-) (lb)	Torsion MY (lb-ft)	Moment MZ (lb-ft)
0.00		0.00	0.00	0.00	0.00
5.00		435.09	1805.78	0.00	0.00
10.00		427.97	1837.55	0.00	0.00
15.00		420.85	1808.38	0.00	0.00
20.00		413.72	1779.22	0.00	0.00
25.00		406.60	1750.05	0.00	0.00
30.00		399.81	1720.89	0.00	0.00
35.00		410.36	1691.72	0.00	0.00
40.00		418.58	1662.56	0.00	0.00
44.00		338.38	1309.05	0.00	0.00
45.00		85.90	595.69	0.00	0.00
50.00		437.66	2945.65	0.00	0.00
55.00		441.26	1417.46	0.00	0.00
60.00		443.68	1391.94	0.00	0.00
65.00		445.05	1366.42	0.00	0.00
70.00		445.49	1340.90	0.00	0.00
75.00		445.10	1315.38	0.00	0.00
80.00		443.95	1289.86	0.00	0.00
85.00		442.10	1264.34	0.00	0.00
88.75		329.32	931.51	0.00	0.00
90.00		110.52	491.83	0.00	0.00
94.00		353.92	1556.23	0.00	0.00
95.00		87.76	164.56	0.00	0.00
100.00		439.23	812.95	0.00	0.00
105.00		435.20	796.54	0.00	0.00
110.00		430.69	780.14	0.00	0.00
115.00		425.73	763.73	0.00	0.00
120.00		420.34	747.33	0.00	0.00
125.00		414.56	730.92	0.00	0.00
130.00		408.39	714.52	0.00	0.00
134.50		361.78	629.04	0.00	0.00
135.00		40.23	115.61	0.00	0.00
138.75		300.54	857.75	0.00	0.00
140.00		99.05	138.77	0.00	0.00
145.00		393.22	547.11	0.00	0.00
150.00		385.75	534.35	0.00	0.00
155.00		377.99	521.59	0.00	0.00
160.00		369.93	508.83	0.00	0.00
165.00		361.59	496.07	0.00	0.00
170.00		352.99	483.31	0.00	0.00
175.00	(28) attachments	3408.28	2938.35	0.00	0.00
177.50	(8) attachments	797.94	774.36	0.00	0.00
180.00		166.02	187.97	0.00	0.00
185.00	(24) attachments	3683.85	3306.86	0.00	178.94
Totals:		22,256.37	48,823.05	0.00	178.94

Calculated Forces

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II




Page: 10

Load Case: 1.2D + 1.6W 98 mph Wind

Iterations 26

Dead Load Factor 1.20
Wind Load Factor 1.60



Seg Elev (ft)	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Total Deflect (in)	Rotation Sway (deg)	Rotation Twist (deg)	Stress Ratio
0.00	-48.80	-22.31	0.00	-2779.2	0.00	2779.24	6281.65	3140.82	14160.7	7090.90	0.00	0.000	0.000	0.400
5.00	-46.95	-21.97	0.00	-2667.7	0.00	2667.70	6207.52	3103.76	13762.2	6891.36	0.06	-0.117	0.000	0.395
10.00	-45.07	-21.62	0.00	-2557.8	0.00	2557.88	6132.44	3066.22	13367.2	6693.54	0.25	-0.234	0.000	0.390
15.00	-43.22	-21.28	0.00	-2449.7	0.00	2449.76	6056.39	3028.19	12975.7	6497.50	0.56	-0.353	0.000	0.384
20.00	-41.40	-20.94	0.00	-2343.3	0.00	2343.34	5979.38	2989.69	12587.8	6303.28	0.99	-0.472	0.000	0.379
25.00	-39.61	-20.61	0.00	-2238.6	0.00	2238.62	5901.42	2950.71	12203.7	6110.94	1.55	-0.592	0.000	0.373
30.00	-37.85	-20.27	0.00	-2135.5	0.00	2135.59	5822.49	2911.25	11823.5	5920.54	2.23	-0.713	0.000	0.367
35.00	-36.12	-19.91	0.00	-2034.2	0.00	2034.26	5733.46	2866.73	11429.0	5722.99	3.05	-0.835	0.000	0.362
40.00	-34.43	-19.53	0.00	-1934.7	0.00	1934.72	5627.33	2813.67	11007.6	5512.03	3.98	-0.957	0.000	0.357
44.00	-33.11	-19.21	0.00	-1856.5	0.00	1856.59	5542.43	2771.21	10676.3	5346.11	4.83	-1.056	0.000	0.353
45.00	-32.49	-19.15	0.00	-1837.3	0.00	1837.39	5521.20	2760.60	10594.3	5305.03	5.05	-1.081	0.000	0.352
50.00	-29.51	-18.72	0.00	-1741.6	0.00	1741.63	4722.80	2361.40	9081.59	4547.54	6.25	-1.205	0.000	0.389
55.00	-28.06	-18.31	0.00	-1648.0	0.00	1648.04	4656.60	2328.30	8780.72	4396.89	7.58	-1.329	0.000	0.381
60.00	-26.64	-17.89	0.00	-1556.4	0.00	1556.49	4589.45	2294.72	8483.02	4247.81	9.04	-1.463	0.000	0.372
65.00	-25.24	-17.47	0.00	-1467.0	0.00	1467.02	4521.33	2260.66	8188.59	4100.38	10.65	-1.597	0.000	0.363
70.00	-23.88	-17.04	0.00	-1379.6	0.00	1379.66	4452.25	2226.13	7897.53	3954.63	12.39	-1.731	0.000	0.354
75.00	-22.54	-16.61	0.00	-1294.4	0.00	1294.45	4370.60	2185.30	7589.78	3800.53	14.28	-1.865	0.000	0.346
80.00	-21.23	-16.17	0.00	-1211.4	0.00	1211.40	4277.74	2138.87	7269.08	3639.94	16.30	-1.998	0.000	0.338
85.00	-19.95	-15.73	0.00	-1130.5	0.00	1130.54	4184.88	2092.44	6955.30	3482.82	18.46	-2.131	0.000	0.329
88.75	-19.01	-15.38	0.00	-1071.5	0.00	1071.57	4115.23	2057.61	6724.50	3367.25	20.18	-2.232	0.000	0.323
90.00	-18.50	-15.28	0.00	-1052.3	0.00	1052.34	4092.01	2046.01	6648.44	3329.16	20.77	-2.266	0.000	0.321
94.00	-16.95	-14.88	0.00	-991.23	0.00	991.23	2345.44	1172.72	3825.50	1915.59	22.71	-2.372	0.000	0.525
95.00	-16.76	-14.82	0.00	-976.35	0.00	976.35	2339.01	1169.51	3797.57	1901.61	23.21	-2.399	0.000	0.521
100.00	-15.92	-14.40	0.00	-902.27	0.00	902.27	2306.26	1153.13	3658.43	1831.93	25.83	-2.591	0.000	0.500
105.00	-15.09	-13.97	0.00	-830.29	0.00	830.29	2272.55	1136.28	3520.24	1762.74	28.64	-2.782	0.000	0.478
110.00	-14.29	-13.55	0.00	-760.42	0.00	760.42	2237.88	1118.94	3383.12	1694.08	31.65	-2.969	0.000	0.455
115.00	-13.51	-13.13	0.00	-692.67	0.00	692.67	2202.25	1101.13	3247.17	1626.00	34.86	-3.153	0.000	0.432
120.00	-12.75	-12.71	0.00	-627.03	0.00	627.03	2165.66	1082.83	3112.49	1558.56	38.26	-3.333	0.000	0.408
125.00	-12.01	-12.28	0.00	-563.50	0.00	563.50	2128.11	1064.06	2979.20	1491.82	41.84	-3.509	0.000	0.384
130.00	-11.29	-11.86	0.00	-502.08	0.00	502.08	2089.60	1044.80	2847.40	1425.82	45.61	-3.678	0.000	0.358
134.50	-10.67	-11.48	0.00	-448.69	0.00	448.69	2054.12	1027.06	2730.15	1367.10	49.14	-3.826	0.000	0.334
135.00	-10.54	-11.44	0.00	-442.95	0.00	442.95	2050.13	1025.07	2717.20	1360.62	49.55	-3.843	0.000	0.331
138.75	-9.69	-11.10	0.00	-400.05	0.00	400.05	1362.09	681.04	1798.87	900.77	52.61	-3.961	0.000	0.451
140.00	-9.54	-11.01	0.00	-386.18	0.00	386.18	1356.31	678.16	1778.61	890.62	53.65	-4.001	0.000	0.441
145.00	-8.99	-10.60	0.00	-331.15	0.00	331.15	1332.67	666.33	1697.93	850.23	57.94	-4.180	0.000	0.396
150.00	-8.46	-10.20	0.00	-278.14	0.00	278.14	1308.18	654.09	1617.96	810.18	62.40	-4.346	0.000	0.350
155.00	-7.94	-9.80	0.00	-227.13	0.00	227.13	1282.83	641.42	1538.80	770.54	67.03	-4.497	0.000	0.301
160.00	-7.44	-9.41	0.00	-178.12	0.00	178.12	1256.64	628.32	1460.53	731.35	71.81	-4.629	0.000	0.250
165.00	-6.96	-9.02	0.00	-131.06	0.00	131.06	1229.59	614.80	1383.27	692.66	76.71	-4.740	0.000	0.195
170.00	-6.50	-8.64	0.00	-85.96	0.00	85.96	1201.70	600.85	1307.09	654.52	81.72	-4.825	0.000	0.137
175.00	-3.86	-4.99	0.00	-42.77	0.00	42.77	1172.95	586.47	1232.10	616.96	86.80	-4.882	0.000	0.073
177.50	-3.15	-4.13	0.00	-30.28	0.00	30.28	1158.25	579.13	1195.08	598.43	89.36	-4.899	0.000	0.053
180.00	-2.98	-3.95	0.00	-19.95	0.00	19.95	1143.35	571.67	1158.39	580.05	91.93	-4.912	0.000	0.037
185.00	0.00	-3.68	0.00	-0.18	0.00	0.18	1112.89	556.45	1086.05	543.83	97.07	-4.923	0.000	0.000


Wind Loading - Shaft

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Load Case: 0.9D + 1.6W 98 mph Wind

Dead Load Factor 0.90
Wind Load Factor 1.60



Iterations 26

Elev (ft)	Description	Kzt	Kz	qz (psf)	qzGh (psf)	C (mph-ft)	Cf	Ice Thick (in)	Tributary (ft)	Aa (sf)	CfAa (sf)	Wind Force X (lb)	Dead Load Ice (lb)	Tot Dead Load (lb)
0.00		1.00	0.70	16.350	17.98	384.58	0.650	0.000	0.00	0.000	0.00	0.0	0.0	0.0
5.00		1.00	0.70	16.350	17.98	378.34	0.650	0.000	5.00	23.262	15.12	435.1	0.0	1323.9
10.00		1.00	0.70	16.350	17.98	372.09	0.650	0.000	5.00	22.881	14.87	428.0	0.0	1302.0
15.00		1.00	0.70	16.350	17.98	365.84	0.650	0.000	5.00	22.500	14.63	420.8	0.0	1280.1
20.00		1.00	0.70	16.350	17.98	359.60	0.650	0.000	5.00	22.119	14.38	413.7	0.0	1258.2
25.00		1.00	0.70	16.350	17.98	353.35	0.650	0.000	5.00	21.738	14.13	406.6	0.0	1236.4
30.00		1.00	0.70	16.364	18.00	347.26	0.650	0.000	5.00	21.357	13.88	399.8	0.0	1214.5
35.00		1.00	0.73	17.100	18.81	348.60	0.650	0.000	5.00	20.977	13.63	410.4	0.0	1192.6
40.00		1.00	0.76	17.765	19.54	348.80	0.650	0.000	5.00	20.596	13.39	418.6	0.0	1170.8
44.00	Bot - Section 2	1.00	0.78	18.256	20.08	348.31	0.650	0.000	4.00	16.202	10.53	338.4	0.0	920.9
45.00		1.00	0.79	18.374	20.21	348.10	0.650	0.000	1.00	4.087	2.66	85.9	0.0	431.5
50.00	Top - Section 1	1.00	0.81	18.935	20.83	346.66	0.650	0.000	5.00	20.204	13.13	437.7	0.0	2133.1
55.00		1.00	0.83	19.458	21.40	351.22	0.650	0.000	5.00	19.823	12.89	441.3	0.0	986.9
60.00		1.00	0.85	19.948	21.94	348.72	0.650	0.000	5.00	19.443	12.64	443.7	0.0	967.8
65.00		1.00	0.87	20.409	22.45	345.75	0.650	0.000	5.00	19.062	12.39	445.1	0.0	948.6
70.00		1.00	0.89	20.846	22.93	342.38	0.650	0.000	5.00	18.681	12.14	445.5	0.0	929.5
75.00		1.00	0.91	21.261	23.39	338.65	0.650	0.000	5.00	18.300	11.90	445.1	0.0	910.4
80.00		1.00	0.93	21.656	23.82	334.60	0.650	0.000	5.00	17.919	11.65	443.9	0.0	891.2
85.00		1.00	0.94	22.035	24.24	330.26	0.650	0.000	5.00	17.538	11.40	442.1	0.0	872.1
88.75	Bot - Section 3	1.00	0.96	22.308	24.54	326.83	0.650	0.000	3.75	12.904	8.39	329.3	0.0	641.5
90.00		1.00	0.96	22.398	24.64	325.66	0.650	0.000	1.25	4.313	2.80	110.5	0.0	349.8
94.00	Top - Section 2	1.00	0.97	22.678	24.95	321.80	0.650	0.000	4.00	13.642	8.87	353.9	0.0	1106.2
95.00		1.00	0.97	22.746	25.02	325.42	0.650	0.000	1.00	3.372	2.19	87.8	0.0	108.2
100.00		1.00	0.99	23.082	25.39	320.39	0.650	0.000	5.00	16.634	10.81	439.2	0.0	533.5
105.00		1.00	1.00	23.406	25.75	315.16	0.650	0.000	5.00	16.253	10.56	435.2	0.0	521.2
110.00		1.00	1.02	23.719	26.09	309.74	0.650	0.000	5.00	15.872	10.32	430.7	0.0	508.9
115.00		1.00	1.03	24.022	26.42	304.14	0.650	0.000	5.00	15.491	10.07	425.7	0.0	496.6
120.00		1.00	1.04	24.316	26.75	298.38	0.650	0.000	5.00	15.111	9.82	420.3	0.0	484.3
125.00		1.00	1.05	24.602	27.06	292.46	0.650	0.000	5.00	14.730	9.57	414.6	0.0	472.0
130.00		1.00	1.07	24.879	27.37	286.40	0.650	0.000	5.00	14.349	9.33	408.4	0.0	459.7
134.50	Bot - Section 4	1.00	1.08	25.122	27.63	280.83	0.650	0.000	4.50	12.588	8.18	361.8	0.0	403.2
135.00		1.00	1.08	25.149	27.66	280.21	0.650	0.000	0.50	1.398	0.91	40.2	0.0	79.1
138.75	Top - Section 3	1.00	1.09	25.346	27.88	275.47	0.650	0.000	3.75	10.365	6.74	300.5	0.0	586.2
140.00		1.00	1.09	25.411	27.95	277.66	0.650	0.000	1.25	3.407	2.21	99.1	0.0	85.0
145.00		1.00	1.10	25.667	28.23	271.23	0.650	0.000	5.00	13.391	8.70	393.2	0.0	334.2
150.00		1.00	1.11	25.917	28.51	264.69	0.650	0.000	5.00	13.011	8.46	385.8	0.0	324.6
155.00		1.00	1.12	26.161	28.78	258.03	0.650	0.000	5.00	12.630	8.21	378.0	0.0	315.0
160.00		1.00	1.13	26.399	29.04	251.27	0.650	0.000	5.00	12.249	7.96	369.9	0.0	305.5
165.00		1.00	1.14	26.633	29.30	244.40	0.650	0.000	5.00	11.868	7.71	361.6	0.0	295.9
170.00		1.00	1.15	26.861	29.55	237.44	0.650	0.000	5.00	11.487	7.47	353.0	0.0	286.3
175.00	Appurtenance(s)	1.00	1.16	27.084	29.79	230.39	0.650	0.000	5.00	11.106	7.22	344.1	0.0	276.7
177.50	Appurtenance(s)	1.00	1.16	27.194	29.91	226.83	0.650	0.000	2.50	5.410	3.52	168.3	0.0	134.8
180.00		1.00	1.17	27.303	30.03	223.25	0.650	0.000	2.50	5.315	3.45	166.0	0.0	132.4
185.00	Appurtenance(s)	1.00	1.18	27.518	30.27	216.02	0.650	0.000	5.00	10.345	6.72	325.7	0.0	257.6
Totals:								185.00			15,204.4	29,469.2		

Discrete Appurtenance Forces


Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 12

Load Case: 0.9D + 1.6W 98 mph Wind

Dead Load Factor 0.90
Wind Load Factor 1.60



Iterations 26

No.	Elev (ft)	Description	Qty	qz (psf)	qzGh (psf)	CaAa x Ka	Ka	Total CaAa (sf)	Dead Load (lb)	Horiz Ecc (ft)	Vert Ecc (ft)	Wind FX (lb)	Mom Y (lb-ft)	Mom Z (lb-ft)
1	185.00	Lightning Rod	1	27.665	30.432	1.00	1.00	1.05	31.50	0.000	3.500	51.13	0.00	178.94
2	185.00	ALU 800 MHz Filter	3	27.518	30.269	0.48	0.80	0.96	23.76	0.000	0.000	46.73	0.00	0.00
3	185.00	ALU 800 MHz RRH	3	27.518	30.269	0.54	0.80	3.43	143.10	0.000	0.000	165.88	0.00	0.00
4	185.00	ALU 1900 MHz RRH	3	27.518	30.269	0.54	0.80	3.83	162.00	0.000	0.000	185.35	0.00	0.00
5	185.00	ALU TD-RRH8x20-25	3	27.518	30.269	0.54	0.80	6.51	189.00	0.000	0.000	315.40	0.00	0.00
6	185.00	RFS ACU-A20-N RET	4	27.518	30.269	0.48	0.80	0.23	3.60	0.000	0.000	11.16	0.00	0.00
7	185.00	RFS APXVTM14-C-I20	3	27.518	30.269	0.70	0.90	13.35	148.50	0.000	0.000	646.65	0.00	0.00
8	185.00	RFS APXVSP18-C-A20	3	27.518	30.269	0.75	0.90	17.97	153.90	0.000	0.000	870.44	0.00	0.00
9	185.00	Low Profile Platform	1	27.518	30.269	1.00	1.00	22.00	1350.00	0.000	0.000	1065.48	0.00	0.00
10	177.50	Collar Mount (Andrew	1	27.194	29.913	0.56	0.75	2.81	135.00	0.000	0.000	134.61	0.00	0.00
11	177.50	Raycap DC6-48-60-18-8F	1	27.194	29.913	0.72	0.80	1.58	28.62	0.000	0.000	75.81	0.00	0.00
12	177.50	Ericsson RRU11	6	27.194	29.913	0.57	0.80	8.76	273.78	0.000	0.000	419.20	0.00	0.00
13	175.00	KMW	3	27.084	29.792	0.63	0.80	15.21	130.95	0.000	0.000	724.83	0.00	0.00
14	175.00	Powerwave 7770	6	27.084	29.792	0.62	0.80	20.36	189.00	0.000	0.000	970.76	0.00	0.00
15	175.00	Powerwave LGP21401	12	27.084	29.792	0.48	0.80	6.34	152.28	0.000	0.000	302.02	0.00	0.00
16	175.00	Powerwave LGP13519	6	27.084	29.792	0.48	0.80	0.37	28.62	0.000	0.000	17.85	0.00	0.00
17	175.00	Low Profile Platform	1	27.084	29.792	0.00	1.00	22.00	1350.00	0.000	0.000	1048.69	0.00	0.00

Totals: 4,493.61

7,051.98

Total Applied Force Summary

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II




Page: 13

Load Case: 0.9D + 1.6W 98 mph Wind

Dead Load Factor 0.90

Wind Load Factor 1.60



Iterations 26

Elev (ft)	Description	Lateral FX (-) (lb)	Axial FY (-) (lb)	Torsion MY (lb-ft)	Moment MZ (lb-ft)
0.00		0.00	0.00	0.00	0.00
5.00		435.09	1354.33	0.00	0.00
10.00		427.97	1378.16	0.00	0.00
15.00		420.85	1356.29	0.00	0.00
20.00		413.72	1334.41	0.00	0.00
25.00		406.60	1312.54	0.00	0.00
30.00		399.81	1290.67	0.00	0.00
35.00		410.36	1268.79	0.00	0.00
40.00		418.58	1246.92	0.00	0.00
44.00		338.38	981.79	0.00	0.00
45.00		85.90	446.77	0.00	0.00
50.00		437.66	2209.24	0.00	0.00
55.00		441.26	1063.09	0.00	0.00
60.00		443.68	1043.95	0.00	0.00
65.00		445.05	1024.81	0.00	0.00
70.00		445.49	1005.67	0.00	0.00
75.00		445.10	986.53	0.00	0.00
80.00		443.95	967.40	0.00	0.00
85.00		442.10	948.26	0.00	0.00
88.75		329.32	698.63	0.00	0.00
90.00		110.52	368.87	0.00	0.00
94.00		353.92	1167.17	0.00	0.00
95.00		87.76	123.42	0.00	0.00
100.00		439.23	609.71	0.00	0.00
105.00		435.20	597.41	0.00	0.00
110.00		430.69	585.10	0.00	0.00
115.00		425.73	572.80	0.00	0.00
120.00		420.34	560.49	0.00	0.00
125.00		414.56	548.19	0.00	0.00
130.00		408.39	535.89	0.00	0.00
134.50		361.78	471.78	0.00	0.00
135.00		40.23	86.70	0.00	0.00
138.75		300.54	643.31	0.00	0.00
140.00		99.05	104.08	0.00	0.00
145.00		393.22	410.33	0.00	0.00
150.00		385.75	400.76	0.00	0.00
155.00		377.99	391.19	0.00	0.00
160.00		369.93	381.62	0.00	0.00
165.00		361.59	372.06	0.00	0.00
170.00		352.99	362.49	0.00	0.00
175.00	(28) attachments	3408.28	2203.77	0.00	0.00
177.50	(8) attachments	797.94	580.77	0.00	0.00
180.00		166.02	140.98	0.00	0.00
185.00	(24) attachments	3683.85	2480.14	0.00	178.94
	Totals:	22,256.37	36,617.29	0.00	178.94

Calculated Forces


Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 14

Load Case: 0.9D + 1.6W 98 mph Wind

Dead Load Factor 0.90
Wind Load Factor 1.60



Iterations 26

Seg Elev (ft)	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Total Deflect (in)	Rotation Sway (deg)	Rotation Twist (deg)	Stress Ratio
0.00	-36.59	-22.29	0.00	-2749.1	0.00	2749.18	6281.65	3140.82	14160.7	7090.90	0.00	0.000	0.000	0.394
5.00	-35.20	-21.93	0.00	-2637.7	0.00	2637.71	6207.52	3103.76	13762.2	6891.36	0.06	-0.115	0.000	0.388
10.00	-33.78	-21.56	0.00	-2528.0	0.00	2528.07	6132.44	3066.22	13367.2	6693.54	0.24	-0.231	0.000	0.383
15.00	-32.38	-21.20	0.00	-2420.2	0.00	2420.25	6056.39	3028.19	12975.7	6497.50	0.55	-0.349	0.000	0.378
20.00	-31.00	-20.84	0.00	-2314.2	0.00	2314.24	5979.38	2989.69	12587.8	6303.28	0.98	-0.466	0.000	0.372
25.00	-29.65	-20.49	0.00	-2210.0	0.00	2210.02	5901.42	2950.71	12203.7	6110.94	1.53	-0.585	0.000	0.367
30.00	-28.32	-20.13	0.00	-2107.5	0.00	2107.58	5822.49	2911.25	11823.5	5920.54	2.21	-0.705	0.000	0.361
35.00	-27.02	-19.76	0.00	-2006.9	0.00	2006.92	5733.46	2866.73	11429.0	5722.99	3.01	-0.825	0.000	0.355
40.00	-25.74	-19.37	0.00	-1908.1	0.00	1908.11	5627.33	2813.67	11007.6	5512.03	3.94	-0.945	0.000	0.351
44.00	-24.75	-19.04	0.00	-1830.6	0.00	1830.62	5542.43	2771.21	10676.3	5346.11	4.77	-1.043	0.000	0.347
45.00	-24.28	-18.98	0.00	-1811.5	0.00	1811.58	5521.20	2760.60	10594.3	5305.03	4.99	-1.068	0.000	0.346
50.00	-22.04	-18.55	0.00	-1716.6	0.00	1716.67	4722.80	2361.40	9081.59	4547.54	6.18	-1.190	0.000	0.382
55.00	-20.94	-18.13	0.00	-1623.9	0.00	1623.94	4656.60	2328.30	8780.72	4396.89	7.49	-1.312	0.000	0.374
60.00	-19.87	-17.71	0.00	-1533.2	0.00	1533.29	4589.45	2294.72	8483.02	4247.81	8.93	-1.444	0.000	0.365
65.00	-18.82	-17.28	0.00	-1444.7	0.00	1444.76	4521.33	2260.66	8188.59	4100.38	10.52	-1.576	0.000	0.357
70.00	-17.79	-16.84	0.00	-1358.3	0.00	1358.37	4452.25	2226.13	7897.53	3954.63	12.24	-1.708	0.000	0.348
75.00	-16.78	-16.41	0.00	-1274.1	0.00	1274.15	4370.60	2185.30	7589.78	3800.53	14.10	-1.839	0.000	0.339
80.00	-15.79	-15.97	0.00	-1192.1	0.00	1192.11	4277.74	2138.87	7269.08	3639.94	16.09	-1.971	0.000	0.331
85.00	-14.83	-15.52	0.00	-1112.2	0.00	1112.27	4184.88	2092.44	6955.30	3482.82	18.23	-2.102	0.000	0.323
88.75	-14.12	-15.18	0.00	-1054.0	0.00	1054.07	4115.23	2057.61	6724.50	3367.25	19.92	-2.201	0.000	0.317
90.00	-13.74	-15.07	0.00	-1035.0	0.00	1035.09	4092.01	2046.01	6648.44	3329.16	20.50	-2.234	0.000	0.314
94.00	-12.57	-14.69	0.00	-974.79	0.00	974.79	2345.44	1172.72	3825.50	1915.59	22.41	-2.339	0.000	0.514
95.00	-12.42	-14.62	0.00	-960.10	0.00	960.10	2339.01	1169.51	3797.57	1901.61	22.91	-2.365	0.000	0.510
100.00	-11.79	-14.19	0.00	-887.00	0.00	887.00	2306.26	1153.13	3658.43	1831.93	25.48	-2.554	0.000	0.489
105.00	-11.16	-13.77	0.00	-816.03	0.00	816.03	2272.55	1136.28	3520.24	1762.74	28.26	-2.741	0.000	0.468
110.00	-10.56	-13.34	0.00	-747.19	0.00	747.19	2237.88	1118.94	3383.12	1694.08	31.23	-2.926	0.000	0.446
115.00	-9.97	-12.92	0.00	-680.48	0.00	680.48	2202.25	1101.13	3247.17	1626.00	34.39	-3.106	0.000	0.423
120.00	-9.40	-12.50	0.00	-615.89	0.00	615.89	2165.66	1082.83	3112.49	1558.56	37.73	-3.283	0.000	0.400
125.00	-8.84	-12.08	0.00	-553.41	0.00	553.41	2128.11	1064.06	2979.20	1491.82	41.26	-3.456	0.000	0.375
130.00	-8.30	-11.66	0.00	-493.03	0.00	493.03	2089.60	1044.80	2847.40	1425.82	44.97	-3.622	0.000	0.350
134.50	-7.83	-11.28	0.00	-440.57	0.00	440.57	2054.12	1027.06	2730.15	1367.10	48.45	-3.767	0.000	0.326
135.00	-7.74	-11.24	0.00	-434.93	0.00	434.93	2050.13	1025.07	2717.20	1360.62	48.85	-3.784	0.000	0.324
138.75	-7.10	-10.91	0.00	-392.78	0.00	392.78	1362.09	681.04	1798.87	900.77	51.87	-3.900	0.000	0.442
140.00	-6.98	-10.81	0.00	-379.15	0.00	379.15	1356.31	678.16	1778.61	890.62	52.89	-3.939	0.000	0.431
145.00	-6.57	-10.41	0.00	-325.07	0.00	325.07	1332.67	666.33	1697.93	850.23	57.11	-4.115	0.000	0.388
150.00	-6.17	-10.02	0.00	-273.01	0.00	273.01	1308.18	654.09	1617.96	810.18	61.50	-4.278	0.000	0.342
155.00	-5.79	-9.62	0.00	-222.93	0.00	222.93	1282.83	641.42	1538.80	770.54	66.06	-4.426	0.000	0.294
160.00	-5.41	-9.24	0.00	-174.81	0.00	174.81	1256.64	628.32	1460.53	731.35	70.76	-4.555	0.000	0.244
165.00	-5.06	-8.85	0.00	-128.63	0.00	128.63	1229.59	614.80	1383.27	692.66	75.59	-4.664	0.000	0.190
170.00	-4.72	-8.48	0.00	-84.36	0.00	84.36	1201.70	600.85	1307.09	654.52	80.52	-4.748	0.000	0.133
175.00	-2.80	-4.90	0.00	-41.97	0.00	41.97	1172.95	586.47	1232.10	616.96	85.52	-4.803	0.000	0.070
177.50	-2.29	-4.06	0.00	-29.72	0.00	29.72	1158.25	579.13	1195.08	598.43	88.04	-4.821	0.000	0.052
180.00	-2.16	-3.88	0.00	-19.58	0.00	19.58	1143.35	571.67	1158.39	580.05	90.56	-4.833	0.000	0.036
185.00	0.00	-3.68	0.00	-0.18	0.00	0.18	1112.89	556.45	1086.05	543.83	95.62	-4.844	0.000	0.000

Wind Loading - Shaft


Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Load Case: 1.2D + 1.0Di + 1.0Wi 50 mph Wind

Iterations 25

Dead Load Factor 1.20
Wind Load Factor 1.00



Elev (ft)	Description	Kzt	Kz	qz (psf)	qzGh (psf)	C (mph-ft)	Cf	Ice Thick (in)	Tributary (ft)	Aa (sf)	CfAa (sf)	Wind Force X (lb)	Dead Load Ice (lb)	Tot Dead Load (lb)
0.00		1.00	0.70	4.256	4.68	0.00	1.200	0.000	0.00	0.000	0.00	0.0	0.0	0.0
5.00		1.00	0.70	4.256	4.68	0.00	1.200	1.242	5.00	24.297	29.16	136.5	434.0	2199.1
10.00		1.00	0.70	4.256	4.68	0.00	1.200	1.331	5.00	23.990	28.79	134.8	458.3	2194.3
15.00		1.00	0.70	4.256	4.68	0.00	1.200	1.386	5.00	23.655	28.39	132.9	469.9	2176.8
20.00		1.00	0.70	4.256	4.68	0.00	1.200	1.427	5.00	23.308	27.97	130.9	476.0	2153.6
25.00		1.00	0.70	4.256	4.68	0.00	1.200	1.459	5.00	22.954	27.54	129.0	478.8	2127.3
30.00		1.00	0.70	4.260	4.69	0.00	1.200	1.486	5.00	22.596	27.11	127.0	479.4	2098.8
35.00		1.00	0.73	4.451	4.90	0.00	1.200	1.509	5.00	22.234	26.68	130.6	478.6	2068.8
40.00		1.00	0.76	4.625	5.09	0.00	1.200	1.529	5.00	21.870	26.24	133.5	476.6	2037.6
44.00	Bot - Section 2	1.00	0.78	4.752	5.23	0.00	1.200	1.544	4.00	17.232	20.68	108.1	379.5	1607.3
45.00		1.00	0.79	4.783	5.26	0.00	1.200	1.547	1.00	4.344	5.21	27.4	96.4	671.8
50.00	Top - Section 1	1.00	0.81	4.929	5.42	0.00	1.200	1.564	5.00	21.507	25.81	139.9	478.6	3322.7
55.00		1.00	0.83	5.065	5.57	0.00	1.200	1.579	5.00	21.139	25.37	141.3	474.4	1790.3
60.00		1.00	0.85	5.193	5.71	0.00	1.200	1.592	5.00	20.770	24.92	142.4	469.7	1760.1
65.00		1.00	0.87	5.313	5.84	0.00	1.200	1.605	5.00	20.399	24.48	143.1	464.6	1729.4
70.00		1.00	0.89	5.426	5.97	0.00	1.200	1.617	5.00	20.029	24.03	143.5	459.0	1698.4
75.00		1.00	0.91	5.534	6.09	0.00	1.200	1.628	5.00	19.657	23.59	143.6	453.1	1667.0
80.00		1.00	0.93	5.637	6.20	0.00	1.200	1.639	5.00	19.285	23.14	143.5	446.9	1635.2
85.00		1.00	0.94	5.736	6.31	0.00	1.200	1.649	5.00	18.912	22.69	143.2	440.5	1603.2
88.75	Bot - Section 3	1.00	0.96	5.807	6.39	0.00	1.200	1.656	3.75	13.939	16.73	106.8	326.6	1181.9
90.00		1.00	0.96	5.830	6.41	0.00	1.200	1.658	1.25	4.659	5.59	35.9	109.9	576.3
94.00	Top - Section 2	1.00	0.97	5.903	6.49	0.00	1.200	1.666	4.00	14.753	17.70	115.0	347.2	1822.2
95.00		1.00	0.97	5.921	6.51	0.00	1.200	1.667	1.00	3.650	4.38	28.5	86.5	230.8
100.00		1.00	0.99	6.008	6.61	0.00	1.200	1.676	5.00	18.030	21.64	143.0	425.5	1136.9
105.00		1.00	1.00	6.093	6.70	0.00	1.200	1.684	5.00	17.656	21.19	142.0	418.2	1113.1
110.00		1.00	1.02	6.174	6.79	0.00	1.200	1.692	5.00	17.282	20.74	140.9	410.6	1089.2
115.00		1.00	1.03	6.253	6.88	0.00	1.200	1.699	5.00	16.908	20.29	139.6	403.0	1065.1
120.00		1.00	1.04	6.330	6.96	0.00	1.200	1.707	5.00	16.533	19.84	138.1	395.1	1040.9
125.00		1.00	1.05	6.404	7.04	0.00	1.200	1.714	5.00	16.158	19.39	136.6	387.2	1016.5
130.00		1.00	1.07	6.476	7.12	0.00	1.200	1.720	5.00	15.783	18.94	134.9	379.1	992.0
134.50	Bot - Section 4	1.00	1.08	6.539	7.19	0.00	1.200	1.726	4.50	13.883	16.66	119.8	334.5	872.1
135.00		1.00	1.08	6.546	7.20	0.00	1.200	1.727	0.50	1.542	1.85	13.3	37.6	143.0
138.75	Top - Section 3	1.00	1.09	6.598	7.26	0.00	1.200	1.732	3.75	11.447	13.74	99.7	277.0	1058.6
140.00		1.00	1.09	6.615	7.28	0.00	1.200	1.733	1.25	3.768	4.52	32.9	91.8	205.2
145.00		1.00	1.10	6.681	7.35	0.00	1.200	1.739	5.00	14.841	17.81	130.9	358.8	804.3
150.00		1.00	1.11	6.746	7.42	0.00	1.200	1.745	5.00	14.465	17.36	128.8	350.2	783.0
155.00		1.00	1.12	6.810	7.49	0.00	1.200	1.751	5.00	14.089	16.91	126.6	341.5	761.6
160.00		1.00	1.13	6.872	7.56	0.00	1.200	1.757	5.00	13.713	16.46	124.4	332.8	740.0
165.00		1.00	1.14	6.933	7.63	0.00	1.200	1.762	5.00	13.336	16.00	122.0	323.9	718.4
170.00		1.00	1.15	6.992	7.69	0.00	1.200	1.767	5.00	12.960	15.55	119.6	315.0	696.7
175.00	Appurtenance(s)	1.00	1.16	7.050	7.76	0.00	1.200	1.772	5.00	12.583	15.10	117.1	305.9	674.9
177.50	Appurtenance(s)	1.00	1.16	7.079	7.79	0.00	1.200	1.775	2.50	6.150	7.38	57.5	150.7	330.4
180.00		1.00	1.17	7.107	7.82	0.00	1.200	1.777	2.50	6.056	7.27	56.8	148.4	324.9
185.00	Appurtenance(s)	1.00	1.18	7.163	7.88	0.00	1.200	1.782	5.00	11.830	14.20	111.9	287.6	631.1
Totals:								185.00				4,953.8		54,551.0

Discrete Appurtenance Forces


Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 16

Load Case: 1.2D + 1.0Di + 1.0Wi 50 mph Wind

Dead Load Factor 1.20
Wind Load Factor 1.00



Iterations 25

No.	Elev (ft)	Description	Qty	qz (psf)	qzGh (psf)	CaAa x Ka	Ka	Total CaAa (sf)	Dead Load (lb)	Horiz Ecc (ft)	Vert Ecc (ft)	Wind FX (lb)	Mom Y (lb-ft)	Mom Z (lb-ft)
1	185.00	Lightning Rod	1	7.201	7.922	1.00	1.00	3.47	65.08	0.000	3.500	27.52	0.00	96.31
2	185.00	ALU 800 MHz Filter	3	7.163	7.879	0.48	0.80	1.42	-126.60	0.000	0.000	11.17	0.00	0.00
3	185.00	ALU 800 MHz RRH	3	7.163	7.879	0.54	0.80	5.03	354.08	0.000	0.000	39.65	0.00	0.00
4	185.00	ALU 1900 MHz RRH	3	7.163	7.879	0.54	0.80	5.26	626.44	0.000	0.000	41.42	0.00	0.00
5	185.00	ALU TD-RRH8x20-25	3	7.163	7.879	0.54	0.80	7.85	591.91	0.000	0.000	61.85	0.00	0.00
6	185.00	RFS ACU-A20-N RET	4	7.163	7.879	0.48	0.80	0.73	17.15	0.000	0.000	5.74	0.00	0.00
7	185.00	RFS APXVTM14-C-I20	3	7.163	7.879	0.70	0.90	15.75	691.54	0.000	0.000	124.10	0.00	0.00
8	185.00	RFS APXVSP18-C-A20	3	7.163	7.879	0.75	0.90	24.37	586.25	0.000	0.000	191.99	0.00	0.00
9	185.00	Low Profile Platform	1	7.163	7.879	1.00	1.00	40.04	2836.65	0.000	0.000	315.46	0.00	0.00
10	177.50	Collar Mount (Andrew	1	7.079	7.787	0.56	0.75	4.81	7.79	0.000	0.000	37.45	0.00	0.00
11	177.50	Raycap DC6-48-60-18-8F	1	7.079	7.787	0.72	0.80	2.35	83.33	0.000	0.000	18.31	0.00	0.00
12	177.50	Ericsson RRU11	6	7.079	7.787	0.57	0.80	11.02	864.35	0.000	0.000	85.80	0.00	0.00
13	175.00	KMW	3	7.050	7.755	0.63	0.80	20.59	529.50	0.000	0.000	159.64	0.00	0.00
14	175.00	Powerwave 7770	6	7.050	7.755	0.62	0.80	24.33	1078.56	0.000	0.000	188.68	0.00	0.00
15	175.00	Powerwave LGP21401	12	7.050	7.755	0.48	0.80	10.50	422.52	0.000	0.000	81.46	0.00	0.00
16	175.00	Powerwave LGP13519	6	7.050	7.755	0.48	0.80	0.88	79.83	0.000	0.000	6.84	0.00	0.00
17	175.00	Low Profile Platform	1	7.050	7.755	0.00	1.00	39.94	2829.24	0.000	0.000	309.71	0.00	0.00

Totals: 11,537.62

1,706.79

Total Applied Force Summary


Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 17

Load Case: 1.2D + 1.0Di + 1.0Wi 50 mph Wind

Dead Load Factor 1.20
Wind Load Factor 1.00



Iterations 25

Elev (ft)	Description	Lateral FX (-) (lb)	Axial FY (-) (lb)	Torsion MY (lb-ft)	Moment MZ (lb-ft)
0.00		0.00	0.00	0.00	0.00
5.00		136.50	2239.73	0.00	0.00
10.00		134.77	2295.87	0.00	0.00
15.00		132.89	2278.32	0.00	0.00
20.00		130.94	2255.18	0.00	0.00
25.00		128.95	2228.81	0.00	0.00
30.00		127.05	2200.32	0.00	0.00
35.00		130.64	2170.31	0.00	0.00
40.00		133.50	2139.15	0.00	0.00
44.00		108.09	1688.51	0.00	0.00
45.00		27.43	692.12	0.00	0.00
50.00		139.93	3424.26	0.00	0.00
55.00		141.33	1891.89	0.00	0.00
60.00		142.36	1861.67	0.00	0.00
65.00		143.05	1831.00	0.00	0.00
70.00		143.46	1799.93	0.00	0.00
75.00		143.60	1768.52	0.00	0.00
80.00		143.51	1736.79	0.00	0.00
85.00		143.19	1704.79	0.00	0.00
88.75		106.85	1258.08	0.00	0.00
90.00		35.85	601.72	0.00	0.00
94.00		114.95	1903.46	0.00	0.00
95.00		28.53	251.08	0.00	0.00
100.00		143.00	1238.44	0.00	0.00
105.00		142.00	1214.70	0.00	0.00
110.00		140.85	1190.78	0.00	0.00
115.00		139.56	1166.70	0.00	0.00
120.00		138.14	1142.46	0.00	0.00
125.00		136.59	1118.08	0.00	0.00
130.00		134.92	1093.57	0.00	0.00
134.50		119.84	963.51	0.00	0.00
135.00		13.33	153.16	0.00	0.00
138.75		99.69	1134.73	0.00	0.00
140.00		32.90	230.57	0.00	0.00
145.00		130.89	905.86	0.00	0.00
150.00		128.81	884.54	0.00	0.00
155.00		126.65	863.12	0.00	0.00
160.00		124.39	841.59	0.00	0.00
165.00		122.04	819.98	0.00	0.00
170.00		119.61	798.28	0.00	0.00
175.00	(28) attachments	863.45	5716.14	0.00	0.00
177.50	(8) attachments	199.02	1297.33	0.00	0.00
180.00		56.81	336.39	0.00	0.00
185.00	(24) attachments	930.75	6296.52	0.00	96.31
	Totals:	6,660.62	69,627.95	0.00	96.31

Calculated Forces

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II




Page: 18

Load Case: 1.2D + 1.0Di + 1.0Wi 50 mph Wind

Iterations 25

Dead Load Factor 1.20
Wind Load Factor 1.00




Seg Elev (ft)	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Total Deflect (in)	Rotation Sway (deg)	Rotation Twist (deg)	Stress Ratio
0.00	-69.63	-6.68	0.00	-825.18	0.00	825.18	6281.65	3140.82	14160.7	7090.90	0.00	0.000	0.000	0.127
5.00	-67.38	-6.59	0.00	-791.78	0.00	791.78	6207.52	3103.76	13762.2	6891.36	0.02	-0.035	0.000	0.126
10.00	-65.08	-6.49	0.00	-758.85	0.00	758.85	6132.44	3066.22	13367.2	6693.54	0.07	-0.069	0.000	0.124
15.00	-62.80	-6.39	0.00	-726.41	0.00	726.41	6056.39	3028.19	12975.7	6497.50	0.17	-0.105	0.000	0.122
20.00	-60.54	-6.29	0.00	-694.46	0.00	694.46	5979.38	2989.69	12587.8	6303.28	0.29	-0.140	0.000	0.120
25.00	-58.31	-6.19	0.00	-663.00	0.00	663.00	5901.42	2950.71	12203.7	6110.94	0.46	-0.176	0.000	0.118
30.00	-56.11	-6.09	0.00	-632.04	0.00	632.04	5822.49	2911.25	11823.5	5920.54	0.66	-0.211	0.000	0.116
35.00	-53.93	-5.99	0.00	-601.57	0.00	601.57	5733.46	2866.73	11429.0	5722.99	0.90	-0.247	0.000	0.115
40.00	-51.79	-5.87	0.00	-571.63	0.00	571.63	5627.33	2813.67	11007.6	5512.03	1.18	-0.284	0.000	0.113
44.00	-50.10	-5.77	0.00	-548.13	0.00	548.13	5542.43	2771.21	10676.3	5346.11	1.43	-0.313	0.000	0.112
45.00	-49.41	-5.76	0.00	-542.35	0.00	542.35	5521.20	2760.60	10594.3	5305.03	1.50	-0.320	0.000	0.111
50.00	-45.98	-5.63	0.00	-513.55	0.00	513.55	4722.80	2361.40	9081.59	4547.54	1.85	-0.357	0.000	0.123
55.00	-44.08	-5.51	0.00	-485.39	0.00	485.39	4656.60	2328.30	8780.72	4396.89	2.25	-0.393	0.000	0.120
60.00	-42.22	-5.38	0.00	-457.86	0.00	457.86	4589.45	2294.72	8483.02	4247.81	2.68	-0.433	0.000	0.117
65.00	-40.39	-5.25	0.00	-430.97	0.00	430.97	4521.33	2260.66	8188.59	4100.38	3.15	-0.472	0.000	0.114
70.00	-38.59	-5.12	0.00	-404.72	0.00	404.72	4452.25	2226.13	7897.53	3954.63	3.67	-0.511	0.000	0.111
75.00	-36.81	-4.98	0.00	-379.13	0.00	379.13	4370.60	2185.30	7589.78	3800.53	4.23	-0.551	0.000	0.108
80.00	-35.08	-4.85	0.00	-354.22	0.00	354.22	4277.74	2138.87	7269.08	3639.94	4.82	-0.590	0.000	0.106
85.00	-33.37	-4.70	0.00	-330.00	0.00	330.00	4184.88	2092.44	6955.30	3482.82	5.46	-0.629	0.000	0.103
88.75	-32.11	-4.59	0.00	-312.36	0.00	312.36	4115.23	2057.61	6724.50	3367.25	5.97	-0.658	0.000	0.101
90.00	-31.51	-4.56	0.00	-306.61	0.00	306.61	4092.01	2046.01	6648.44	3329.16	6.14	-0.668	0.000	0.100
94.00	-29.61	-4.43	0.00	-288.36	0.00	288.36	2345.44	1172.72	3825.50	1915.59	6.71	-0.699	0.000	0.163
95.00	-29.35	-4.42	0.00	-283.93	0.00	283.93	2339.01	1169.51	3797.57	1901.61	6.86	-0.707	0.000	0.162
100.00	-28.11	-4.29	0.00	-261.83	0.00	261.83	2306.26	1153.13	3658.43	1831.93	7.63	-0.763	0.000	0.155
105.00	-26.89	-4.16	0.00	-240.39	0.00	240.39	2272.55	1136.28	3520.24	1762.74	8.46	-0.818	0.000	0.148
110.00	-25.70	-4.02	0.00	-219.62	0.00	219.62	2237.88	1118.94	3383.12	1694.08	9.35	-0.872	0.000	0.141
115.00	-24.53	-3.89	0.00	-199.51	0.00	199.51	2202.25	1101.13	3247.17	1626.00	10.29	-0.925	0.000	0.134
120.00	-23.39	-3.75	0.00	-180.09	0.00	180.09	2165.66	1082.83	3112.49	1558.56	11.28	-0.977	0.000	0.126
125.00	-22.27	-3.61	0.00	-161.34	0.00	161.34	2128.11	1064.06	2979.20	1491.82	12.33	-1.027	0.000	0.119
130.00	-21.18	-3.47	0.00	-143.28	0.00	143.28	2089.60	1044.80	2847.40	1425.82	13.44	-1.076	0.000	0.111
134.50	-20.22	-3.34	0.00	-127.65	0.00	127.65	2054.12	1027.06	2730.15	1367.10	14.47	-1.118	0.000	0.103
135.00	-20.06	-3.33	0.00	-125.98	0.00	125.98	2050.13	1025.07	2717.20	1360.62	14.59	-1.122	0.000	0.102
138.75	-18.93	-3.22	0.00	-113.47	0.00	113.47	1362.09	681.04	1798.87	900.77	15.48	-1.156	0.000	0.140
140.00	-18.70	-3.19	0.00	-109.45	0.00	109.45	1356.31	678.16	1778.61	890.62	15.79	-1.167	0.000	0.137
145.00	-17.79	-3.06	0.00	-93.49	0.00	93.49	1332.67	666.33	1697.93	850.23	17.04	-1.218	0.000	0.123
150.00	-16.91	-2.92	0.00	-78.20	0.00	78.20	1308.18	654.09	1617.96	810.18	18.34	-1.265	0.000	0.109
155.00	-16.05	-2.79	0.00	-63.59	0.00	63.59	1282.83	641.42	1538.80	770.54	19.69	-1.307	0.000	0.095
160.00	-15.21	-2.65	0.00	-49.65	0.00	49.65	1256.64	628.32	1460.53	731.35	21.08	-1.344	0.000	0.080
165.00	-14.39	-2.52	0.00	-36.38	0.00	36.38	1229.59	614.80	1383.27	692.66	22.50	-1.375	0.000	0.064
170.00	-13.59	-2.38	0.00	-23.79	0.00	23.79	1201.70	600.85	1307.09	654.52	23.95	-1.399	0.000	0.048
175.00	-7.90	-1.38	0.00	-11.87	0.00	11.87	1172.95	586.47	1232.10	616.96	25.43	-1.414	0.000	0.026
177.50	-6.61	-1.15	0.00	-8.41	0.00	8.41	1158.25	579.13	1195.08	598.43	26.17	-1.419	0.000	0.020
180.00	-6.27	-1.09	0.00	-5.53	0.00	5.53	1143.35	571.67	1158.39	580.05	26.91	-1.423	0.000	0.015
185.00	0.00	-0.93	0.00	-0.10	0.00	0.10	1112.89	556.45	1086.05	543.83	28.41	-1.426	0.000	0.000

Seismic Segment Forces (Factored)

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 19

Load Case: 1.2D + 1.0E					Iterations 23
Gust Response Factor	1.10	Sds	0.14	Ss	0.18
Dead Load Factor	1.20	Seismic Load Factor	1.00	Sd1	0.07
Wind Load Factor	0.00	Structure Frequency	0.32	SA	0.02
				Seismic Importance Factor	1.00

Top Elev (ft)	Description	Wz (lb)	a	b	c	Lateral Fs (lb)	R: 1.50
0.00		0.00	0.00	0.00	0.00	0.00	
5.00		1470.9	0.00	0.03	0.02	19.30	
10.00		1446.6	0.01	0.05	0.03	28.17	
15.00		1422.3	0.01	0.06	0.03	32.59	
20.00		1398.0	0.02	0.07	0.04	34.73	
25.00		1373.7	0.03	0.07	0.04	35.68	
30.00		1349.4	0.05	0.07	0.04	36.04	
35.00		1325.1	0.07	0.07	0.04	36.14	
40.00		1300.8	0.09	0.07	0.04	36.18	
44.00	Bot - Section 2	1023.1	0.11	0.07	0.04	28.91	
45.00		479.48	0.11	0.07	0.04	13.60	
50.00	Top - Section 1	2370.0	0.14	0.07	0.03	68.49	
55.00		1096.5	0.17	0.07	0.03	32.14	
60.00		1075.3	0.20	0.06	0.02	31.66	
65.00		1054.0	0.23	0.06	0.02	30.60	
70.00		1032.7	0.27	0.05	0.01	28.69	
75.00		1011.5	0.31	0.04	0.01	25.59	
80.00		990.25	0.35	0.03	0.01	21.00	
85.00		968.99	0.40	0.02	0.01	14.78	
88.75	Bot - Section 3	712.79	0.43	0.01	0.01	6.82	
90.00		388.70	0.45	0.00	0.01	2.90	
94.00	Top - Section 2	1229.1	0.49	-0.01	0.01	0.34	
95.00		120.21	0.50	-0.02	0.01	-0.19	
100.00		592.82	0.55	-0.04	0.01	-6.47	
105.00		579.15	0.61	-0.06	0.02	-11.18	
110.00		565.48	0.67	-0.08	0.02	-14.58	
115.00		551.81	0.73	-0.10	0.04	-16.44	
120.00		538.14	0.80	-0.11	0.05	-16.78	
125.00		524.47	0.86	-0.12	0.07	-15.69	
130.00		510.80	0.93	-0.12	0.10	-13.33	
134.50	Bot - Section 4	448.03	1.00	-0.11	0.13	-9.20	
135.00		87.88	1.01	-0.11	0.13	-1.74	
138.75	Top - Section 3	651.32	1.06	-0.09	0.17	-8.78	
140.00		94.49	1.08	-0.08	0.18	-1.05	
145.00		371.30	1.16	-0.03	0.23	0.03	
150.00		360.66	1.24	0.05	0.29	4.92	
155.00		350.03	1.33	0.16	0.36	10.37	
160.00		339.40	1.41	0.31	0.45	16.33	
165.00		328.76	1.50	0.51	0.55	22.72	
170.00		318.13	1.60	0.77	0.66	29.48	
175.00	Appurtenance(s)	2364.0	1.69	1.09	0.80	280.99	
177.50	Appurtenance(s)	635.76	1.74	1.28	0.88	84.53	
180.00		147.10	1.79	1.49	0.96	21.73	
185.00	Appurtenance(s)	2736.6	1.89	1.98	1.14	490.74	
Totals:		37,736.4				1,410.8	Total Wind: 22,256.4

Seismic Base Shear is Less Than 50% of Wind Force - An Analysis is NOT Required


Calculated Forces

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 20

Load Case: 1.2D + 1.0E										Iterations 23
Gust Response Factor	1.10						Sds	0.14		Ss 0.18
Dead Load Factor	1.20	Seismic Load Factor	1.00	Sd1	0.07					S1 0.06
Wind Load Factor	0.00	Structure Frequency	0.32	SA	0.02	Seismic Importance Factor	1.00			



Seg Elev (ft)	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Total Deflect (in)	Rotation Sway (deg)	Rotation Twist (deg)	Stress Ratio
0.00	-48.82	-1.53	0.00	-206.77	0.00	206.77	6281.65	3140.82	14160.7	7090.90	0.00	0.00	0.00	0.037
5.00	-47.02	-1.52	0.00	-199.13	0.00	199.13	6207.52	3103.76	13762.2	6891.36	0.00	-0.01	0.036	
10.00	-45.18	-1.49	0.00	-191.55	0.00	191.55	6132.44	3066.22	13367.2	6693.54	0.02	-0.02	0.036	
15.00	-43.37	-1.47	0.00	-184.07	0.00	184.07	6056.39	3028.19	12975.7	6497.50	0.04	-0.03	0.035	
20.00	-41.59	-1.44	0.00	-176.73	0.00	176.73	5979.38	2989.69	12587.8	6303.28	0.07	-0.04	0.035	
25.00	-39.84	-1.41	0.00	-169.54	0.00	169.54	5901.42	2950.71	12203.7	6110.94	0.12	-0.04	0.034	
30.00	-38.12	-1.38	0.00	-162.50	0.00	162.50	5822.49	2911.25	11823.5	5920.54	0.17	-0.05	0.034	
35.00	-36.43	-1.35	0.00	-155.61	0.00	155.61	5733.46	2866.73	11429.0	5722.99	0.23	-0.06	0.034	
40.00	-34.77	-1.31	0.00	-148.89	0.00	148.89	5627.33	2813.67	11007.6	5512.03	0.30	-0.07	0.033	
44.00	-33.46	-1.28	0.00	-143.64	0.00	143.64	5542.43	2771.21	10676.3	5346.11	0.36	-0.08	0.033	
45.00	-32.86	-1.27	0.00	-142.35	0.00	142.35	5521.20	2760.60	10594.3	5305.03	0.38	-0.08	0.033	
50.00	-29.91	-1.21	0.00	-135.99	0.00	135.99	4722.80	2361.40	9081.59	4547.54	0.47	-0.09	0.036	
55.00	-28.50	-1.18	0.00	-129.96	0.00	129.96	4656.60	2328.30	8780.72	4396.89	0.57	-0.10	0.036	
60.00	-27.10	-1.15	0.00	-124.08	0.00	124.08	4589.45	2294.72	8483.02	4247.81	0.68	-0.11	0.035	
65.00	-25.74	-1.12	0.00	-118.35	0.00	118.35	4521.33	2260.66	8188.59	4100.38	0.81	-0.12	0.035	
70.00	-24.40	-1.09	0.00	-112.76	0.00	112.76	4452.25	2226.13	7897.53	3954.63	0.94	-0.13	0.034	
75.00	-23.08	-1.07	0.00	-107.30	0.00	107.30	4370.60	2185.30	7589.78	3800.53	1.09	-0.14	0.034	
80.00	-21.79	-1.05	0.00	-101.97	0.00	101.97	4277.74	2138.87	7269.08	3639.94	1.24	-0.16	0.033	
85.00	-20.53	-1.03	0.00	-96.73	0.00	96.73	4184.88	2092.44	6955.30	3482.82	1.41	-0.17	0.033	
88.75	-19.60	-1.02	0.00	-92.86	0.00	92.86	4115.23	2057.61	6724.50	3367.25	1.55	-0.18	0.032	
90.00	-19.10	-1.02	0.00	-91.58	0.00	91.58	4092.01	2046.01	6648.44	3329.16	1.59	-0.18	0.032	
94.00	-17.55	-1.02	0.00	-87.50	0.00	87.50	2345.44	1172.72	3825.50	1915.59	1.75	-0.19	0.053	
95.00	-17.38	-1.02	0.00	-86.48	0.00	86.48	2339.01	1169.51	3797.57	1901.61	1.79	-0.19	0.053	
100.00	-16.57	-1.02	0.00	-81.37	0.00	81.37	2306.26	1153.13	3658.43	1831.93	1.99	-0.21	0.052	
105.00	-15.77	-1.03	0.00	-76.26	0.00	76.26	2272.55	1136.28	3520.24	1762.74	2.22	-0.22	0.050	
110.00	-14.99	-1.03	0.00	-71.13	0.00	71.13	2237.88	1118.94	3383.12	1694.08	2.47	-0.24	0.049	
115.00	-14.23	-1.03	0.00	-66.00	0.00	66.00	2202.25	1101.13	3247.17	1626.00	2.73	-0.26	0.047	
120.00	-13.48	-1.03	0.00	-60.86	0.00	60.86	2165.66	1082.83	3112.49	1558.56	3.01	-0.28	0.045	
125.00	-12.75	-1.03	0.00	-55.72	0.00	55.72	2128.11	1064.06	2979.20	1491.82	3.31	-0.29	0.043	
130.00	-12.03	-1.03	0.00	-50.58	0.00	50.58	2089.60	1044.80	2847.40	1425.82	3.63	-0.31	0.041	
134.50	-11.41	-1.03	0.00	-45.96	0.00	45.96	2054.12	1027.06	2730.15	1367.10	3.93	-0.33	0.039	
135.00	-11.29	-1.03	0.00	-45.44	0.00	45.44	2050.13	1025.07	2717.20	1360.62	3.96	-0.33	0.039	
138.75	-10.43	-1.02	0.00	-41.59	0.00	41.59	1362.09	681.04	1798.87	900.77	4.22	-0.34	0.054	
140.00	-10.29	-1.02	0.00	-40.31	0.00	40.31	1356.31	678.16	1778.61	890.62	4.31	-0.34	0.053	
145.00	-9.75	-1.02	0.00	-35.19	0.00	35.19	1332.67	666.33	1697.93	850.23	4.68	-0.36	0.049	
150.00	-9.21	-1.02	0.00	-30.07	0.00	30.07	1308.18	654.09	1617.96	810.18	5.07	-0.38	0.044	
155.00	-8.69	-1.01	0.00	-24.97	0.00	24.97	1282.83	641.42	1538.80	770.54	5.48	-0.40	0.039	
160.00	-8.18	-0.99	0.00	-19.94	0.00	19.94	1256.64	628.32	1460.53	731.35	5.90	-0.41	0.034	
165.00	-7.68	-0.96	0.00	-14.99	0.00	14.99	1229.59	614.80	1383.27	692.66	6.34	-0.42	0.028	
170.00	-7.20	-0.93	0.00	-10.17	0.00	10.17	1201.70	600.85	1307.09	654.52	6.79	-0.43	0.022	
175.00	-4.26	-0.63	0.00	-5.50	0.00	5.50	1172.95	586.47	1232.10	616.96	7.25	-0.44	0.013	
177.50	-3.49	-0.54	0.00	-3.93	0.00	3.93	1158.25	579.13	1195.08	598.43	7.48	-0.44	0.010	
180.00	-3.30	-0.52	0.00	-2.58	0.00	2.58	1143.35	571.67	1158.39	580.05	7.71	-0.44	0.007	
185.00	0.00	-0.49	0.00	0.00	0.00	0.00	1112.89	556.45	1086.05	543.83	8.18	-0.45	0.000	


Seismic Segment Forces (Factored)

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 21

Load Case: 0.9D + 1.0E				Iterations 23
Gust Response Factor	1.10	Sds	0.14	Ss 0.18
Dead Load Factor	0.90	Seismic Load Factor	1.00	S1 0.06
Wind Load Factor	0.00	Structure Frequency	0.32	SA 0.02
				Seismic Importance Factor 1.00



Top Elev (ft)	Description	Wz (lb)	a	b	c	Lateral Fs (lb)	R: 1.50
0.00		0.00	0.00	0.00	0.00	0.00	
5.00		1470.9	0.00	0.03	0.02	19.30	
10.00		1446.6	0.01	0.05	0.03	28.17	
15.00		1422.3	0.01	0.06	0.03	32.59	
20.00		1398.0	0.02	0.07	0.04	34.73	
25.00		1373.7	0.03	0.07	0.04	35.68	
30.00		1349.4	0.05	0.07	0.04	36.04	
35.00		1325.1	0.07	0.07	0.04	36.14	
40.00		1300.8	0.09	0.07	0.04	36.18	
44.00	Bot - Section 2	1023.1	0.11	0.07	0.04	28.91	
45.00		479.48	0.11	0.07	0.04	13.60	
50.00	Top - Section 1	2370.0	0.14	0.07	0.03	68.49	
55.00		1096.5	0.17	0.07	0.03	32.14	
60.00		1075.3	0.20	0.06	0.02	31.66	
65.00		1054.0	0.23	0.06	0.02	30.60	
70.00		1032.7	0.27	0.05	0.01	28.69	
75.00		1011.5	0.31	0.04	0.01	25.59	
80.00		990.25	0.35	0.03	0.01	21.00	
85.00		968.99	0.40	0.02	0.01	14.78	
88.75	Bot - Section 3	712.79	0.43	0.01	0.01	6.82	
90.00		388.70	0.45	0.00	0.01	2.90	
94.00	Top - Section 2	1229.1	0.49	-0.01	0.01	0.34	
95.00		120.21	0.50	-0.02	0.01	-0.19	
100.00		592.82	0.55	-0.04	0.01	-6.47	
105.00		579.15	0.61	-0.06	0.02	-11.18	
110.00		565.48	0.67	-0.08	0.02	-14.58	
115.00		551.81	0.73	-0.10	0.04	-16.44	
120.00		538.14	0.80	-0.11	0.05	-16.78	
125.00		524.47	0.86	-0.12	0.07	-15.69	
130.00		510.80	0.93	-0.12	0.10	-13.33	
134.50	Bot - Section 4	448.03	1.00	-0.11	0.13	-9.20	
135.00		87.88	1.01	-0.11	0.13	-1.74	
138.75	Top - Section 3	651.32	1.06	-0.09	0.17	-8.78	
140.00		94.49	1.08	-0.08	0.18	-1.05	
145.00		371.30	1.16	-0.03	0.23	0.03	
150.00		360.66	1.24	0.05	0.29	4.92	
155.00		350.03	1.33	0.16	0.36	10.37	
160.00		339.40	1.41	0.31	0.45	16.33	
165.00		328.76	1.50	0.51	0.55	22.72	
170.00		318.13	1.60	0.77	0.66	29.48	
175.00	Appurtenance(s)	2364.0	1.69	1.09	0.80	280.99	
177.50	Appurtenance(s)	635.76	1.74	1.28	0.88	84.53	
180.00		147.10	1.79	1.49	0.96	21.73	
185.00	Appurtenance(s)	2736.6	1.89	1.98	1.14	490.74	
Totals:		37,736.4				1,410.8	Total Wind: 22,256.4

Seismic Base Shear is Less Than 50% of Wind Force - An Analysis is NOT Required


Calculated Forces

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 22

Load Case: 0.9D + 1.0E										Iterations 23
Gust Response Factor	1.10						Sds	0.14		Ss 0.18
Dead Load Factor	0.90	Seismic Load Factor	1.00	Sd1	0.07					S1 0.06
Wind Load Factor	0.00	Structure Frequency	0.32	SA	0.02	Seismic Importance Factor	1.00			



Seg Elev (ft)	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Total Deflect (in)	Rotation Sway (deg)	Rotation Twist (deg)	Stress Ratio
0.00	-36.62	-1.53	0.00	-204.33	0.00	204.33	6281.65	3140.82	14160.7	7090.90	0.00	0.00	0.00	0.035
5.00	-35.26	-1.51	0.00	-196.69	0.00	196.69	6207.52	3103.76	13762.2	6891.36	0.00	-0.01	0.034	
10.00	-33.88	-1.49	0.00	-189.13	0.00	189.13	6132.44	3066.22	13367.2	6693.54	0.02	-0.02	0.034	
15.00	-32.53	-1.46	0.00	-181.68	0.00	181.68	6056.39	3028.19	12975.7	6497.50	0.04	-0.03	0.033	
20.00	-31.19	-1.43	0.00	-174.36	0.00	174.36	5979.38	2989.69	12587.8	6303.28	0.07	-0.03	0.033	
25.00	-29.88	-1.40	0.00	-167.21	0.00	167.21	5901.42	2950.71	12203.7	6110.94	0.11	-0.04	0.032	
30.00	-28.59	-1.37	0.00	-160.21	0.00	160.21	5822.49	2911.25	11823.5	5920.54	0.17	-0.05	0.032	
35.00	-27.32	-1.33	0.00	-153.37	0.00	153.37	5733.46	2866.73	11429.0	5722.99	0.23	-0.06	0.032	
40.00	-26.07	-1.30	0.00	-146.70	0.00	146.70	5627.33	2813.67	11007.6	5512.03	0.30	-0.07	0.031	
44.00	-25.09	-1.27	0.00	-141.50	0.00	141.50	5542.43	2771.21	10676.3	5346.11	0.36	-0.08	0.031	
45.00	-24.64	-1.26	0.00	-140.23	0.00	140.23	5521.20	2760.60	10594.3	5305.03	0.38	-0.08	0.031	
50.00	-22.44	-1.19	0.00	-133.93	0.00	133.93	4722.80	2361.40	9081.59	4547.54	0.46	-0.09	0.034	
55.00	-21.37	-1.16	0.00	-127.97	0.00	127.97	4656.60	2328.30	8780.72	4396.89	0.56	-0.10	0.034	
60.00	-20.33	-1.13	0.00	-122.16	0.00	122.16	4589.45	2294.72	8483.02	4247.81	0.67	-0.11	0.033	
65.00	-19.30	-1.10	0.00	-116.49	0.00	116.49	4521.33	2260.66	8188.59	4100.38	0.80	-0.12	0.033	
70.00	-18.30	-1.08	0.00	-110.98	0.00	110.98	4452.25	2226.13	7897.53	3954.63	0.93	-0.13	0.032	
75.00	-17.31	-1.05	0.00	-105.60	0.00	105.60	4370.60	2185.30	7589.78	3800.53	1.07	-0.14	0.032	
80.00	-16.34	-1.03	0.00	-100.34	0.00	100.34	4277.74	2138.87	7269.08	3639.94	1.23	-0.15	0.031	
85.00	-15.39	-1.02	0.00	-95.19	0.00	95.19	4184.88	2092.44	6955.30	3482.82	1.39	-0.16	0.031	
88.75	-14.70	-1.01	0.00	-91.38	0.00	91.38	4115.23	2057.61	6724.50	3367.25	1.53	-0.17	0.031	
90.00	-14.33	-1.01	0.00	-90.12	0.00	90.12	4092.01	2046.01	6648.44	3329.16	1.57	-0.18	0.031	
94.00	-13.16	-1.00	0.00	-86.09	0.00	86.09	2345.44	1172.72	3825.50	1915.59	1.72	-0.19	0.051	
95.00	-13.04	-1.01	0.00	-85.09	0.00	85.09	2339.01	1169.51	3797.57	1901.61	1.76	-0.19	0.050	
100.00	-12.43	-1.01	0.00	-80.06	0.00	80.06	2306.26	1153.13	3658.43	1831.93	1.97	-0.20	0.049	
105.00	-11.83	-1.01	0.00	-75.03	0.00	75.03	2272.55	1136.28	3520.24	1762.74	2.19	-0.22	0.048	
110.00	-11.24	-1.01	0.00	-69.99	0.00	69.99	2237.88	1118.94	3383.12	1694.08	2.43	-0.24	0.046	
115.00	-10.67	-1.01	0.00	-64.94	0.00	64.94	2202.25	1101.13	3247.17	1626.00	2.69	-0.26	0.045	
120.00	-10.11	-1.01	0.00	-59.89	0.00	59.89	2165.66	1082.83	3112.49	1558.56	2.97	-0.27	0.043	
125.00	-9.56	-1.01	0.00	-54.84	0.00	54.84	2128.11	1064.06	2979.20	1491.82	3.26	-0.29	0.041	
130.00	-9.02	-1.01	0.00	-49.79	0.00	49.79	2089.60	1044.80	2847.40	1425.82	3.57	-0.31	0.039	
134.50	-8.55	-1.01	0.00	-45.24	0.00	45.24	2054.12	1027.06	2730.15	1367.10	3.87	-0.32	0.037	
135.00	-8.47	-1.01	0.00	-44.73	0.00	44.73	2050.13	1025.07	2717.20	1360.62	3.90	-0.32	0.037	
138.75	-7.82	-1.01	0.00	-40.95	0.00	40.95	1362.09	681.04	1798.87	900.77	4.16	-0.33	0.051	
140.00	-7.72	-1.01	0.00	-39.69	0.00	39.69	1356.31	678.16	1778.61	890.62	4.25	-0.34	0.050	
145.00	-7.31	-1.01	0.00	-34.65	0.00	34.65	1332.67	666.33	1697.93	850.23	4.61	-0.36	0.046	
150.00	-6.91	-1.00	0.00	-29.61	0.00	29.61	1308.18	654.09	1617.96	810.18	5.00	-0.37	0.042	
155.00	-6.52	-0.99	0.00	-24.60	0.00	24.60	1282.83	641.42	1538.80	770.54	5.40	-0.39	0.037	
160.00	-6.13	-0.97	0.00	-19.64	0.00	19.64	1256.64	628.32	1460.53	731.35	5.82	-0.41	0.032	
165.00	-5.76	-0.95	0.00	-14.77	0.00	14.77	1229.59	614.80	1383.27	692.66	6.25	-0.42	0.026	
170.00	-5.40	-0.92	0.00	-10.02	0.00	10.02	1201.70	600.85	1307.09	654.52	6.69	-0.43	0.020	
175.00	-3.20	-0.62	0.00	-5.43	0.00	5.43	1172.95	586.47	1232.10	616.96	7.14	-0.43	0.012	
177.50	-2.62	-0.53	0.00	-3.88	0.00	3.88	1158.25	579.13	1195.08	598.43	7.37	-0.44	0.009	
180.00	-2.48	-0.51	0.00	-2.55	0.00	2.55	1143.35	571.67	1158.39	580.05	7.60	-0.44	0.007	
185.00	0.00	-0.49	0.00	0.00	0.00	0.00	1112.89	556.45	1086.05	543.83	8.06	-0.44	0.000	


Wind Loading - Shaft

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Load Case: 1.0D + 1.0W 60 mph Wind

Dead Load Factor 1.00
Wind Load Factor 1.00



Iterations 24

Elev (ft)	Description	Kzt	Kz	qz (psf)	qzGh (psf)	C (mph-ft)	Cf	Ice Thick (in)	Tributary (ft)	Aa (sf)	CfAa (sf)	Wind Force X (lb)	Dead Load Ice (lb)	Tot Dead Load (lb)
0.00		1.00	0.70	6.129	6.74	235.46	0.650	0.000	0.00	0.000	0.00	0.0	0.0	0.0
5.00		1.00	0.70	6.129	6.74	231.63	0.650	0.000	5.00	23.262	15.12	101.9	0.0	1471.0
10.00		1.00	0.70	6.129	6.74	227.81	0.650	0.000	5.00	22.881	14.87	100.3	0.0	1446.7
15.00		1.00	0.70	6.129	6.74	223.99	0.650	0.000	5.00	22.500	14.63	98.6	0.0	1422.4
20.00		1.00	0.70	6.129	6.74	220.16	0.650	0.000	5.00	22.119	14.38	96.9	0.0	1398.1
25.00		1.00	0.70	6.129	6.74	216.34	0.650	0.000	5.00	21.738	14.13	95.3	0.0	1373.7
30.00		1.00	0.70	6.134	6.75	212.61	0.650	0.000	5.00	21.357	13.88	93.7	0.0	1349.4
35.00		1.00	0.73	6.410	7.05	213.43	0.650	0.000	5.00	20.977	13.63	96.1	0.0	1325.1
40.00		1.00	0.76	6.659	7.33	213.55	0.650	0.000	5.00	20.596	13.39	98.1	0.0	1300.8
44.00	Bot - Section 2	1.00	0.78	6.843	7.53	213.25	0.650	0.000	4.00	16.202	10.53	79.3	0.0	1023.2
45.00		1.00	0.79	6.887	7.58	213.12	0.650	0.000	1.00	4.087	2.66	20.1	0.0	479.5
50.00	Top - Section 1	1.00	0.81	7.098	7.81	212.24	0.650	0.000	5.00	20.204	13.13	102.5	0.0	2370.1
55.00		1.00	0.83	7.294	8.02	215.03	0.650	0.000	5.00	19.823	12.89	103.4	0.0	1096.6
60.00		1.00	0.85	7.477	8.22	213.50	0.650	0.000	5.00	19.443	12.64	103.9	0.0	1075.3
65.00		1.00	0.87	7.650	8.42	211.68	0.650	0.000	5.00	19.062	12.39	104.3	0.0	1054.1
70.00		1.00	0.89	7.814	8.60	209.62	0.650	0.000	5.00	18.681	12.14	104.4	0.0	1032.8
75.00		1.00	0.91	7.969	8.77	207.34	0.650	0.000	5.00	18.300	11.90	104.3	0.0	1011.5
80.00		1.00	0.93	8.118	8.93	204.86	0.650	0.000	5.00	17.919	11.65	104.0	0.0	990.3
85.00		1.00	0.94	8.260	9.09	202.20	0.650	0.000	5.00	17.538	11.40	103.6	0.0	969.0
88.75	Bot - Section 3	1.00	0.96	8.362	9.20	200.10	0.650	0.000	3.75	12.904	8.39	77.2	0.0	712.8
90.00		1.00	0.96	8.396	9.24	199.38	0.650	0.000	1.25	4.313	2.80	25.9	0.0	388.7
94.00	Top - Section 2	1.00	0.97	8.501	9.35	197.02	0.650	0.000	4.00	13.642	8.87	82.9	0.0	1229.2
95.00		1.00	0.97	8.526	9.38	199.24	0.650	0.000	1.00	3.372	2.19	20.6	0.0	120.2
100.00		1.00	0.99	8.652	9.52	196.16	0.650	0.000	5.00	16.634	10.81	102.9	0.0	592.8
105.00		1.00	1.00	8.774	9.65	192.95	0.650	0.000	5.00	16.253	10.56	102.0	0.0	579.2
110.00		1.00	1.02	8.891	9.78	189.64	0.650	0.000	5.00	15.872	10.32	100.9	0.0	565.5
115.00		1.00	1.03	9.005	9.91	186.21	0.650	0.000	5.00	15.491	10.07	99.7	0.0	551.8
120.00		1.00	1.04	9.115	10.03	182.68	0.650	0.000	5.00	15.111	9.82	98.5	0.0	538.1
125.00		1.00	1.05	9.222	10.14	179.06	0.650	0.000	5.00	14.730	9.57	97.1	0.0	524.5
130.00		1.00	1.07	9.326	10.26	175.35	0.650	0.000	5.00	14.349	9.33	95.7	0.0	510.8
134.50	Bot - Section 4	1.00	1.08	9.417	10.36	171.94	0.650	0.000	4.50	12.588	8.18	84.8	0.0	448.0
135.00		1.00	1.08	9.427	10.37	171.55	0.650	0.000	0.50	1.398	0.91	9.4	0.0	87.9
138.75	Top - Section 3	1.00	1.09	9.501	10.45	168.66	0.650	0.000	3.75	10.365	6.74	70.4	0.0	651.3
140.00		1.00	1.09	9.525	10.48	170.00	0.650	0.000	1.25	3.407	2.21	23.2	0.0	94.5
145.00		1.00	1.10	9.621	10.58	166.06	0.650	0.000	5.00	13.391	8.70	92.1	0.0	371.3
150.00		1.00	1.11	9.715	10.69	162.05	0.650	0.000	5.00	13.011	8.46	90.4	0.0	360.7
155.00		1.00	1.12	9.806	10.79	157.98	0.650	0.000	5.00	12.630	8.21	88.6	0.0	350.0
160.00		1.00	1.13	9.896	10.89	153.84	0.650	0.000	5.00	12.249	7.96	86.7	0.0	339.4
165.00		1.00	1.14	9.983	10.98	149.64	0.650	0.000	5.00	11.868	7.71	84.7	0.0	328.8
170.00		1.00	1.15	10.069	11.08	145.37	0.650	0.000	5.00	11.487	7.47	82.7	0.0	318.1
175.00	Appurtenance(s)	1.00	1.16	10.152	11.17	141.06	0.650	0.000	5.00	11.106	7.22	80.6	0.0	307.5
177.50	Appurtenance(s)	1.00	1.16	10.194	11.21	138.88	0.650	0.000	2.50	5.410	3.52	39.4	0.0	149.8
180.00		1.00	1.17	10.234	11.26	136.68	0.650	0.000	2.50	5.315	3.45	38.9	0.0	147.1
185.00	Appurtenance(s)	1.00	1.18	10.315	11.35	132.26	0.650	0.000	5.00	10.345	6.72	76.3	0.0	286.2
Totals:								185.00				3,562.0		32,743.5

Discrete Appurtenance Forces


Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 24

Load Case: 1.0D + 1.0W 60 mph Wind

Dead Load Factor 1.00
Wind Load Factor 1.00



Iterations 24

No.	Elev (ft)	Description	Qty	qz (psf)	qzGh (psf)	CaAa x Ka	Ka	Total CaAa (sf)	Dead Load (lb)	Horiz Ecc (ft)	Vert Ecc (ft)	Wind FX (lb)	Mom Y (lb-ft)	Mom Z (lb-ft)
1	185.00	Lightning Rod	1	10.370	11.407	1.00	1.00	1.05	35.00	0.000	3.500	11.98	0.00	41.92
2	185.00	ALU 800 MHz Filter	3	10.315	11.346	0.48	0.80	0.96	26.40	0.000	0.000	10.95	0.00	0.00
3	185.00	ALU 800 MHz RRH	3	10.315	11.346	0.54	0.80	3.43	159.00	0.000	0.000	38.86	0.00	0.00
4	185.00	ALU 1900 MHz RRH	3	10.315	11.346	0.54	0.80	3.83	180.00	0.000	0.000	43.42	0.00	0.00
5	185.00	ALU TD-RRH8x20-25	3	10.315	11.346	0.54	0.80	6.51	210.00	0.000	0.000	73.89	0.00	0.00
6	185.00	RFS ACU-A20-N RET	4	10.315	11.346	0.48	0.80	0.23	4.00	0.000	0.000	2.61	0.00	0.00
7	185.00	RFS APXVTM14-C-I20	3	10.315	11.346	0.70	0.90	13.35	165.00	0.000	0.000	151.50	0.00	0.00
8	185.00	RFS APXVSP18-C-A20	3	10.315	11.346	0.75	0.90	17.97	171.00	0.000	0.000	203.92	0.00	0.00
9	185.00	Low Profile Platform	1	10.315	11.346	1.00	1.00	22.00	1500.00	0.000	0.000	249.62	0.00	0.00
10	177.50	Collar Mount (Andrew	1	10.194	11.213	0.56	0.75	2.81	150.00	0.000	0.000	31.54	0.00	0.00
11	177.50	Raycap DC6-48-60-18-8F	1	10.194	11.213	0.72	0.80	1.58	31.80	0.000	0.000	17.76	0.00	0.00
12	177.50	Ericsson RRU11	6	10.194	11.213	0.57	0.80	8.76	304.20	0.000	0.000	98.21	0.00	0.00
13	175.00	KMW	3	10.152	11.168	0.63	0.80	15.21	145.50	0.000	0.000	169.81	0.00	0.00
14	175.00	Powerwave 7770	6	10.152	11.168	0.62	0.80	20.36	210.00	0.000	0.000	227.43	0.00	0.00
15	175.00	Powerwave LGP21401	12	10.152	11.168	0.48	0.80	6.34	169.20	0.000	0.000	70.76	0.00	0.00
16	175.00	Powerwave LGP13519	6	10.152	11.168	0.48	0.80	0.37	31.80	0.000	0.000	4.18	0.00	0.00
17	175.00	Low Profile Platform	1	10.152	11.168	0.00	1.00	22.00	1500.00	0.000	0.000	245.69	0.00	0.00

Totals: 4,992.90

1,652.12

Total Applied Force Summary

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II




Page: 25

Load Case: 1.0D + 1.0W 60 mph Wind

Dead Load Factor 1.00

Wind Load Factor 1.00



Iterations 24

Elev (ft)	Description	Lateral FX (-) (lb)	Axial FY (-) (lb)	Torsion MY (lb-ft)	Moment MZ (lb-ft)
0.00		0.00	0.00	0.00	0.00
5.00		101.93	1504.81	0.00	0.00
10.00		100.26	1531.29	0.00	0.00
15.00		98.59	1506.98	0.00	0.00
20.00		96.93	1482.68	0.00	0.00
25.00		95.26	1458.38	0.00	0.00
30.00		93.67	1434.07	0.00	0.00
35.00		96.14	1409.77	0.00	0.00
40.00		98.06	1385.47	0.00	0.00
44.00		79.28	1090.87	0.00	0.00
45.00		20.12	496.41	0.00	0.00
50.00		102.53	2454.71	0.00	0.00
55.00		103.38	1181.21	0.00	0.00
60.00		103.94	1159.95	0.00	0.00
65.00		104.27	1138.68	0.00	0.00
70.00		104.37	1117.42	0.00	0.00
75.00		104.28	1096.15	0.00	0.00
80.00		104.01	1074.88	0.00	0.00
85.00		103.58	1053.62	0.00	0.00
88.75		77.15	776.26	0.00	0.00
90.00		25.89	409.85	0.00	0.00
94.00		82.92	1296.86	0.00	0.00
95.00		20.56	137.13	0.00	0.00
100.00		102.90	677.45	0.00	0.00
105.00		101.96	663.78	0.00	0.00
110.00		100.90	650.11	0.00	0.00
115.00		99.74	636.44	0.00	0.00
120.00		98.48	622.77	0.00	0.00
125.00		97.12	609.10	0.00	0.00
130.00		95.68	595.43	0.00	0.00
134.50		84.76	524.20	0.00	0.00
135.00		9.42	96.34	0.00	0.00
138.75		70.41	714.79	0.00	0.00
140.00		23.21	115.64	0.00	0.00
145.00		92.12	455.93	0.00	0.00
150.00		90.37	445.29	0.00	0.00
155.00		88.55	434.66	0.00	0.00
160.00		86.67	424.03	0.00	0.00
165.00		84.71	413.39	0.00	0.00
170.00		82.70	402.76	0.00	0.00
175.00	(28) attachments	798.48	2448.63	0.00	0.00
177.50	(8) attachments	186.94	645.30	0.00	0.00
180.00		38.89	156.64	0.00	0.00
185.00	(24) attachments	863.04	2755.71	0.00	41.92
	Totals:	5,214.16	40,685.87	0.00	41.92

Calculated Forces

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II




Page: 26

Load Case: 1.0D + 1.0W 60 mph Wind

Iterations 24

Dead Load Factor 1.00
Wind Load Factor 1.00



Seg Elev (ft)	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Total Deflect (in)	Rotation Sway (deg)	Rotation Twist (deg)	Stress Ratio
0.00	-40.68	-5.22	0.00	-646.79	0.00	646.79	6281.65	3140.82	14160.7	7090.90	0.00	0.000	0.000	0.098
5.00	-39.18	-5.14	0.00	-620.68	0.00	620.68	6207.52	3103.76	13762.2	6891.36	0.01	-0.027	0.000	0.096
10.00	-37.64	-5.06	0.00	-594.98	0.00	594.98	6132.44	3066.22	13367.2	6693.54	0.06	-0.054	0.000	0.095
15.00	-36.13	-4.97	0.00	-569.71	0.00	569.71	6056.39	3028.19	12975.7	6497.50	0.13	-0.082	0.000	0.094
20.00	-34.65	-4.89	0.00	-544.84	0.00	544.84	5979.38	2989.69	12587.8	6303.28	0.23	-0.110	0.000	0.092
25.00	-33.19	-4.81	0.00	-520.39	0.00	520.39	5901.42	2950.71	12203.7	6110.94	0.36	-0.138	0.000	0.091
30.00	-31.75	-4.73	0.00	-496.35	0.00	496.35	5822.49	2911.25	11823.5	5920.54	0.52	-0.166	0.000	0.089
35.00	-30.34	-4.64	0.00	-472.72	0.00	472.72	5733.46	2866.73	11429.0	5722.99	0.71	-0.194	0.000	0.088
40.00	-28.95	-4.55	0.00	-449.52	0.00	449.52	5627.33	2813.67	11007.6	5512.03	0.93	-0.223	0.000	0.087
44.00	-27.86	-4.47	0.00	-431.32	0.00	431.32	5542.43	2771.21	10676.3	5346.11	1.12	-0.246	0.000	0.086
45.00	-27.36	-4.46	0.00	-426.84	0.00	426.84	5521.20	2760.60	10594.3	5305.03	1.18	-0.251	0.000	0.085
50.00	-24.91	-4.36	0.00	-404.55	0.00	404.55	4722.80	2361.40	9081.59	4547.54	1.45	-0.280	0.000	0.094
55.00	-23.73	-4.26	0.00	-382.75	0.00	382.75	4656.60	2328.30	8780.72	4396.89	1.76	-0.309	0.000	0.092
60.00	-22.56	-4.16	0.00	-361.45	0.00	361.45	4589.45	2294.72	8483.02	4247.81	2.10	-0.340	0.000	0.090
65.00	-21.42	-4.06	0.00	-340.63	0.00	340.63	4521.33	2260.66	8188.59	4100.38	2.48	-0.371	0.000	0.088
70.00	-20.30	-3.96	0.00	-320.32	0.00	320.32	4452.25	2226.13	7897.53	3954.63	2.88	-0.402	0.000	0.086
75.00	-19.21	-3.86	0.00	-300.50	0.00	300.50	4370.60	2185.30	7589.78	3800.53	3.32	-0.433	0.000	0.083
80.00	-18.13	-3.76	0.00	-281.20	0.00	281.20	4277.74	2138.87	7269.08	3639.94	3.79	-0.464	0.000	0.081
85.00	-17.08	-3.65	0.00	-262.41	0.00	262.41	4184.88	2092.44	6955.30	3482.82	4.29	-0.495	0.000	0.079
88.75	-16.30	-3.57	0.00	-248.71	0.00	248.71	4115.23	2057.61	6724.50	3367.25	4.69	-0.519	0.000	0.078
90.00	-15.89	-3.55	0.00	-244.24	0.00	244.24	4092.01	2046.01	6648.44	3329.16	4.83	-0.526	0.000	0.077
94.00	-14.59	-3.46	0.00	-230.05	0.00	230.05	2345.44	1172.72	3825.50	1915.59	5.28	-0.551	0.000	0.126
95.00	-14.45	-3.44	0.00	-226.59	0.00	226.59	2339.01	1169.51	3797.57	1901.61	5.40	-0.557	0.000	0.125
100.00	-13.78	-3.34	0.00	-209.38	0.00	209.38	2306.26	1153.13	3658.43	1831.93	6.00	-0.602	0.000	0.120
105.00	-13.11	-3.24	0.00	-192.66	0.00	192.66	2272.55	1136.28	3520.24	1762.74	6.66	-0.646	0.000	0.115
110.00	-12.46	-3.15	0.00	-176.44	0.00	176.44	2237.88	1118.94	3383.12	1694.08	7.36	-0.690	0.000	0.110
115.00	-11.82	-3.05	0.00	-160.71	0.00	160.71	2202.25	1101.13	3247.17	1626.00	8.10	-0.732	0.000	0.104
120.00	-11.20	-2.95	0.00	-145.48	0.00	145.48	2165.66	1082.83	3112.49	1558.56	8.89	-0.774	0.000	0.099
125.00	-10.59	-2.85	0.00	-130.74	0.00	130.74	2128.11	1064.06	2979.20	1491.82	9.73	-0.815	0.000	0.093
130.00	-9.99	-2.75	0.00	-116.50	0.00	116.50	2089.60	1044.80	2847.40	1425.82	10.60	-0.854	0.000	0.086
134.50	-9.47	-2.66	0.00	-104.11	0.00	104.11	2054.12	1027.06	2730.15	1367.10	11.42	-0.888	0.000	0.081
135.00	-9.37	-2.65	0.00	-102.78	0.00	102.78	2050.13	1025.07	2717.20	1360.62	11.51	-0.892	0.000	0.080
138.75	-8.66	-2.58	0.00	-92.83	0.00	92.83	1362.09	681.04	1798.87	900.77	12.23	-0.920	0.000	0.109
140.00	-8.54	-2.55	0.00	-89.61	0.00	89.61	1356.31	678.16	1778.61	890.62	12.47	-0.929	0.000	0.107
145.00	-8.09	-2.46	0.00	-76.84	0.00	76.84	1332.67	666.33	1697.93	850.23	13.46	-0.971	0.000	0.096
150.00	-7.64	-2.37	0.00	-64.54	0.00	64.54	1308.18	654.09	1617.96	810.18	14.50	-1.009	0.000	0.086
155.00	-7.21	-2.27	0.00	-52.71	0.00	52.71	1282.83	641.42	1538.80	770.54	15.58	-1.044	0.000	0.074
160.00	-6.78	-2.18	0.00	-41.34	0.00	41.34	1256.64	628.32	1460.53	731.35	16.69	-1.075	0.000	0.062
165.00	-6.37	-2.09	0.00	-30.42	0.00	30.42	1229.59	614.80	1383.27	692.66	17.83	-1.100	0.000	0.049
170.00	-5.97	-2.00	0.00	-19.95	0.00	19.95	1201.70	600.85	1307.09	654.52	18.99	-1.120	0.000	0.035
175.00	-3.54	-1.16	0.00	-9.93	0.00	9.93	1172.95	586.47	1232.10	616.96	20.17	-1.133	0.000	0.019
177.50	-2.89	-0.96	0.00	-7.03	0.00	7.03	1158.25	579.13	1195.08	598.43	20.77	-1.138	0.000	0.014
180.00	-2.74	-0.92	0.00	-4.63	0.00	4.63	1143.35	571.67	1158.39	580.05	21.37	-1.140	0.000	0.010
185.00	0.00	-0.86	0.00	-0.04	0.00	0.04	1112.89	556.45	1086.05	543.83	22.56	-1.143	0.000	0.000

Final Analysis Summary

Structure: CT04169-A-2-SBA	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 27

Reactions

Load Case	Shear FX (kips)	Shear FZ (kips)	Axial FY (kips)	Moment MX (ft-kips)	Moment MY (ft-kips)	Moment MZ (ft-kips)
1.2D + 1.6W 98 mph Wind	22.3	0.00	48.80	0.00	0.00	2779.24
0.9D + 1.6W 98 mph Wind	22.3	0.00	36.59	0.00	0.00	2749.18
1.2D + 1.0Di + 1.0Wi 50 mph Wind	6.7	0.00	69.63	0.00	0.00	825.18
1.2D + 1.0E	1.5	0.00	48.82	0.00	0.00	206.77
0.9D + 1.0E	1.5	0.00	36.62	0.00	0.00	204.33
1.0D + 1.0W 60 mph Wind	5.2	0.00	40.68	0.00	0.00	646.79

Max Stresses

Load Case	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Elev (ft)	Stress Ratio
1.2D + 1.6W 98 mph Wind	-16.95	-14.88	0.00	-991.23	0.00	-991.23	2345.44	1172.7	3825.50	1915.59	94.00	0.525
0.9D + 1.6W 98 mph Wind	-12.57	-14.69	0.00	-974.79	0.00	-974.79	2345.44	1172.7	3825.50	1915.59	94.00	0.514
1.2D + 1.0Di + 1.0Wi 50 mph Wind	-29.61	-4.43	0.00	-288.36	0.00	-288.36	2345.44	1172.7	3825.50	1915.59	94.00	0.163
1.2D + 1.0E	-10.43	-1.02	0.00	-41.59	0.00	-41.59	1362.09	681.04	1798.87	900.77	138.75	0.054
0.9D + 1.0E	-7.82	-1.01	0.00	-40.95	0.00	-40.95	1362.09	681.04	1798.87	900.77	138.75	0.051
1.0D + 1.0W 60 mph Wind	-14.59	-3.46	0.00	-230.05	0.00	-230.05	2345.44	1172.7	3825.50	1915.59	94.00	0.126

Base Plate Summary

Structure: CT04169-A-2-	Code: EIA/TIA-222-G	10/31/2017
Site Name: Higganum	Exposure: B	
Height: 185.00 (ft)	Crest Height: 0.00	
Base Elev: 0.000 (ft)	Site Class: C - Very Dense Soil	
Gh: 1.1	Topography: 1	Struct Class: II



Page: 28

Reactions	Base Plate	Anchor Bolts
Original Design	Yield (ksi): 50.00	Bolt Circle: 63.00
Moment (kip-ft): 5025.00	Width (in): 67.00	Number Bolts: 28.00
Axial (kip): 41.00	Style: Clipped	Bolt Type: 2.25" 18J
Shear (kip): 39.00	Polygon Sides: 0.00	Bolt Diameter (in): 2.25
Analysis	Clip Length (in): 15.00	Yield (ksi): 75.00
Moment (kip-ft): 2779.24	Effective Len (in): 6.58	Ultimate (ksi): 100.00
Axial (kip): 69.63	Moment (kip-in): 295.65	Arrangement: Clustered
Shear (kip): 22.31	Allow Stress (ksi): 67.50	Cluster Dist (in): 6.00
	Applied Stress (ksi): 0.00	Start Angle (deg): 45.00
Moment Design %: 55.31	Stress Ratio: 0.53	Compression
		Force (kip): 78.11
		Allowable (kip): 260.00
		Ratio: 0.31
		Tension
		Force (kip): 73.14
		Allowable (kip): 260.00
		Ratio: 0.29



Pier Foundation Design For Monopole			Date
			10/31/2017
Customer Name:	Sprint Nextel	EIA/TIA Standard:	EIA-222-G
Site Name:	Higganum	Structure Height (Ft.):	185
Site Number:	CT04169-A-2-SBA	Engineer Name:	W. Velez
Engr. Number:	42163	Engineer Login ID:	

Foundation Info Obtained from:

Drawings/Calculations Acceptable overstress (< 5.0%

Structure Type:

Monopole

Analysis or Design?


Analysis

Base Reactions (Factored):

Axial Load (Kips):	48.8	Shear Force (Kips):	22.3
Uplift Force (Kips):	0.0	Moment (Kips-ft):	2779.2

Foundation Geometries:

Mods required -Yes/No ?:	No		ft.
Diameter of Pier (ft.):	7.0	Depth of Base B. G. S. :	21.0 ft.
Pier Height A. G. (ft.):	0.50		

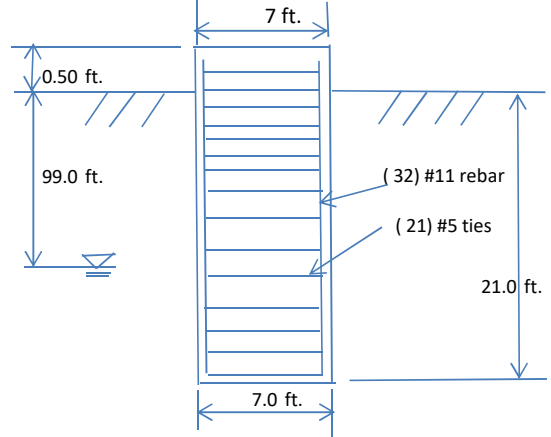

Monopole Pier Foundation

Material Properties and Reabr Info:

Concrete Strength (psi):	3000	Steel Elastic Modulus:	29000	ksi
Vertical bar yield (ksi)	60	Tie steel yield strength:	40	ksi
Vertical Rebar Size #:	11	Tie / Stirrup Size #:	5	
Qty. of Vertical Rebars:	32	Tie Spacing:	18.0	in.
Concrete Cover (in.):	4	Concrete unit weight:	150.0	pcf

Soil Design Parameters:

Water Table B.G.S. (ft):	99.0	Unit weight of water:	62.4	psf
Ratio of Uplift/Axial Skin Friction:	1.0	Pullout failure Angle:	30	(°)
Skin Frictions are to be obtained from:		Soil Report		

Depth of Layers (ft)		γ_{soil} (pcf)	ϕ (°)	Cohesion (psf)	Ultimate Skin Friction (psf)	Ultimate Bearing (psf)	Soil Types						
Top	Bottom												
0.0	3.0	100	0	0		0							
3.0	14.5	100	0	11850		0							
14.5	18.5	100	0	4850		0							
18.5	23.5	100	0	4850		40000							

Soil weight Increase Factor for bouyant soils (1.0 to 1.15): 1.1

Foundation Analysis and Design:

Uplift Strength Reduction Factor:	0.75	Soil Bearing Strength Reduction Factor:	0.75
Total Dry Soil Volume from Conical Failure (cu. Ft.):	6013	Dry Soil Weight from Conical Failure:	601 Kips
Total Buoyant Soil Volume from Conical Failure (cu. Ft.):	0	Buoyant Soil Weight from Conical Failure (K	0 Kips
Total Dry Concrete Volume (cu. Ft.):	827	Total Dry Concrete Weight:	124.1 Kips
Total Buoyant Concrete Volume (cu. Ft.):	0.0	Total Buoyant Concrete Weight:	0.00 Kips
Total Effective Concrete Weight (Kips):	124.1	Total Effective Soil Weight:	601.3 Kips
Total Effective Vertical Load on Base (Kips):	92.1		

Check Soil Capacities:

Allowable Foundation Overturning Resistance (kips-ft.):	27085.3	>	Design Factored Moment (kips-ft):	3011	Usage	0.11	OK!
Factor of Safety of Passive Soil Resistance against Moment:	9.00						OK!

Check the capacities of Reinforcing Concrete:

Strength reduction factor (Flexure and axial tension):	0.90		Strength reduction factor (Shear):	0.75			
Strength reduction factor (Axial compression):	0.65		Wind Load Factor on Concrete Design:	1.00			
Reinforcing Concrete Pier:							
Vertical Steel Rebar Area (sq. in./each):	1.56		Tie / Stirrup Area (sq. in./each):	0.31			
Calculated Moment Capacity (Mn,Kips-Ft):	7850.8	>	Design Factored Moment (Mu, K-Ft):	2853.4	Usage	0.36	OK!
Calculated Shear Capacity (Kips):	970.0	>	Design Factored Shear (Kips):	333.3		0.34	OK!
Calculated Tension Capacity (Tn, Kips):	2695.7	>	Design Factored Tension (Tu Kips):	0.0		0.00	OK!
Calculated Compression Capacity (Pn, Kips):	7282	>	Design Factored Axial Load (Pu Kips):	48.8		0.01	OK!
Moment & Axial Strength Combination:	0.36	OK!	Max. Allowable Tie/Stirrup Spacing:	12.00		in.	
Pier Reinforcement Ratio:	0.009		Reinforcement Ratio is satisfied per ACI				



Monopole Mat Foundation Design

Date	10/31/2017
Customer Name:	SBA Communications Corp
EIA/TIA Standard:	EIA-222-G
Site Name:	Higganum
Structure Height (Ft.):	53
Site Number:	CT04169-A-2-SBA
Engineer Name:	W. Velez
Engr. Number:	42163
Engineer Login ID:	

Foundation Info Obtained from:

Drawings/Calculations
Structure Type: Monopole
Analysis or Design?: Analysis

Structure Type:

Analysis or Design?:


Base Reactions (Factored):

Axial Load (Kips):	48.8	Shear Force (Kips):	22.3
Uplift Force (Kips):	0.0	Moment (Kips-ft):	2779.2

Allowable overstress %: 5.0%


Foundation Geometries:

Anchor Bolt Circle (ft.):	5.25	Depth of Base BG (ft.):	4.50
Thickness of Pad (ft.):	5.00	Width of Pad (ft.):	28
Length of Pad (ft.):	28	Final Length of pad (ft):	28.0
		Final width of pad (ft):	28.0

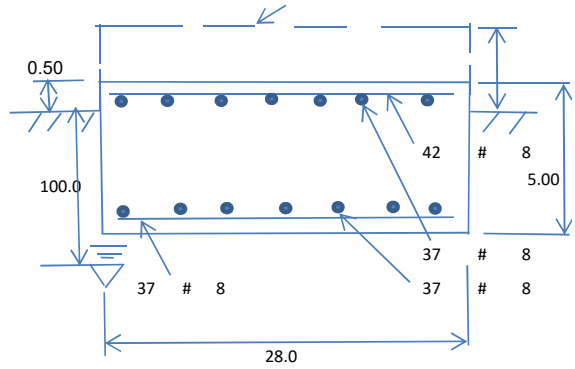

Material Properties and Reabr Info:

Concrete Strength (psi):	3000	Steel Elastic Modulus:	29000	ksi
Pad Rebar Yield (Ksi):	60	Tie Spacing (in):	12.0	
Pad Steel Rebar Size (#):	8	Unit Weight of Concrete:	150.0	pcf
Concrete Cover (in.):	3			
Rebar at the bottom of the concrete pad:				
Qty. of Rebar in Pad (L):	42	Qty. of Rebar in Pad (W):	42	
Rebar at the top of the concrete pad:				
Qty. of Rebar in Pad (L):	37	Qty. of Rebar in Pad (W):	37	

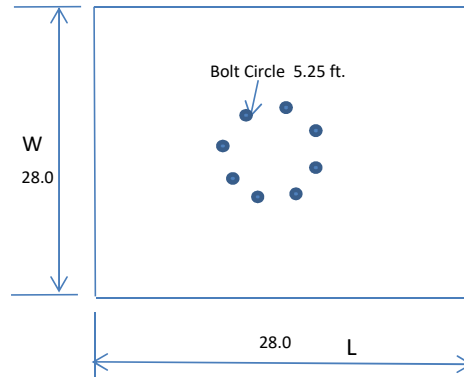

Apply 1.35 factor for e/w Per G: 1.00

Soil Design Parameters:

Water Table B.G.S. (ft):	100.0	Unit Weight of Water:	62.4	pcf	Angle from Top of Pad:	30
Ultimate Bearing Pressure (psf):	40000	Ultimate Skin Friction:	0	Psf	Angle from Bottm of Pad:	25
Consider Friction for O.T.M. (Y/N):	No	Consider Friction for bearing (Y/N):	No		Angle from Bottm of Pad:	25
Consider soil hor. resist. for OTM.:	Yes	Reduction factor on the maximum soil bearing pressure:	1.00			

Foundation Analysis and Design:

Uplift Strength Reduction Factor:	0.75	Compression Strength Reduction Factor:	0.75
Total Dry Soil Volume (cu. Ft.):	0.00	Total Dry Soil Weight (Kips):	0.00
Total Buoyant Soil Volume (cu. Ft.):	0.00	Total Buoyant Soil Weight (Kips):	0.00
Total Effective Soil Weight (Kips):	0.00	Weight from the Concrete Block at Top (K):	0.00
Total Dry Concrete Volume (cu. Ft.):	3920.00	Total Dry Concrete Weight (Kips):	588.00
Total Buoyant Concrete Volume (cu. Ft.):	0.00	Total Buoyant Concrete Weight (Kips):	0.00
Total Effective Concrete Weight (Kips):	588.00	Total Vertical Load on Base (Kips):	636.80

Check Soil Capacities:

Calculated Maxium Net Soil Pressure under the base (psf):	1651	<	Allowable Factored Soil Bearing (psf):	30000	0.06	OK!
Allowable Foundation Overturning Resistance (kips-ft.):	8092.0	>	Design Factored Momont (kips-ft.):	2784	0.34	OK!
Factor of Safety Against Overturning (O. R. Moment/Design Moment):	2.91					OK!

Load/
Capacity
Ratio

Check the capacities of Reinforcing Concrete:

Strength reduction factor (Flexure and axial tension):	0.90	Strength reduction factor (Shear):	0.75
Strength reduction factor (Axial compression):	0.65	Wind Load Factor on Concrete Design:	1.00

Concrete Pad:

One-Way Design Shear Capacity (L-Direction, Kips):	1559.7	>	One-Way Factored Shear (L-D. Kips):	204.4	0.13	OK!
One-Way Design Shear Capacity (W-Direction, Kips):	1559.7	>	One-Way Factored Shear (W-D., Kips):	204.4	0.13	OK!
One-Way Design Shear Capacity (Corner-Corner, Kips):	1885.4	>	One-Way Factored Shear (C-C, Kips):	377.2	0.20	OK!
Lower Steel Pad Reinforcement Ratio (L-Direct.):	0.0017	OK!	Lower Steel Pad Reinf. Ratio (W-Direct	0.0017		
Lower Steel Pad Moment Capacity (L-Direction, Kips-ft):	8262.6	>	Moment at Bottom (L-Direct, K-Ft):	655.9	0.08	OK!
Lower Steel Pad Moment Capacity (W-Direction, Kips-ft):	8262.6	>	Moment at Bottom (W-Direct, K-Ft):	655.9	0.08	OK!
Lower Steel Pad Moment Capacity (Corner-Corner,K-ft):	11643.3	>	Moment at Bottom (C-C Dir, K-Ft):	927.6	0.08	OK!
Upper Steel Pad Reinforcement Ratio (L-Direct.):	0.0015	OK!	Upper Steel Reinf. Ratio (W-Direct.):	0.0015		
Upper Steel Pad Moment Capacity (L-Direction, Kips-ft):	7297.1	>	Moment at the top (L-Dir Kips-Ft):	71.5	0.01	OK!
Upper Steel Pad Moment Capacity (W-Direction, Kips-ft):	7297.1	>	Moment at the top (W-Dir Kips-Ft):	71.5	0.01	OK!
Upper Steel Pad Moment Capacity (Corner-Corner, K-ft):	10287.3	>	Moment at the top (C-C Direc, K-Ft):	417.0	0.04	OK!

SPECIAL CONSTRUCTION NOTE:
 SPRINT TOWER TOP WORK IS CONTINGENT ON THE FOLLOWING:
 * COMPLETION OF A GLOBAL STRUCTURAL STABILITY ANALYSIS.
 * COMPLETION OF AN ANTENNA/RRH MOUNT STRUCTURAL ASSESSMENT.
 * GC SHALL FURNISH, INSTALL AND COMPLETE ALL REQUIRED STRUCTURAL MODIFICATIONS AS INDICATED IN BEFORE-MENTIONED ANALYSIS AND ASSESSMENT.
 * SBA COMMUNICATIONS CORPORATION SHALL PROVIDE WRITTEN ACCEPTANCE/APPROVAL FOR THE COMPLETION OF ALL TOWER/FOUNDATION STRUCTURAL MODIFICATIONS INCLUDING (AS NECESSARY) CONTROLLED CONSTRUCTION INSPECTIONS, SHOP-DRAWING APPROVALS, MATERIALS TEST RESULTS, AND FINAL ENGINEER'S AFFIDAVIT.

PROJECT: DO MACRO EQUIPMENT DEPLOYMENT
SITE NAME: W. HIGGANUM
SITE CASCADE: CT33XC545-B
MARKET: NORTHERN CONNECTICUT
SBA SITE ID: CT04619-A-06/HIGGANUM
SITE ADDRESS: 285 CHAMBERLAIN HILL ROAD
 HIGGANUM, CT 06441
SITE TYPE: 185' MONOPOLE




1 INTERNATIONAL BLVD, SUITE 800
 MAHWAH, NJ 07495
 TEL: (800) 357-7641



SBA COMMUNICATIONS CORP.
 134 FLANDERS ROAD, SUITE 125
 WESTBOROUGH, MA 01581
 TEL: (508) 251-0720
 FAX: (508) 251-1755



45 BEECHWOOD DRIVE
 N. ANDOVER, MA 01845
 TEL: (978) 557-5553
 FAX: (978) 336-5586



CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN



NOTE:
 OWNER AND TENANT MAY, FROM TIME TO TIME AT TENANT'S OPTION, REPLACE THIS EXHIBIT WITH AN EXHIBIT SETTING FORTH THE LEGAL DESCRIPTION OF THE SITE, OR WITH ENGINEERED OR AS-BUILT DRAWING DEPICTING THE SITE OR ILLUSTRATING STRUCTURAL MODIFICATIONS OR CONSTRUCTION PLANS OF THE SITE. ANY VISUAL OR TEXTUAL REPRESENTATION OF THE EQUIPMENT LOCATED WITHIN THE SITE CONTAINED IN THESE OTHER DOCUMENTS IS ILLUSTRATIVE ONLY, AND DOES NOT LIMIT THE RIGHTS OF SPRINT AS PROVIDED FOR IN THE AGREEMENT. THE LOCATIONS OF ANY ACCESS AND UTILITY EASEMENTS ARE ILLUSTRATIVE ONLY. ACTUAL LOCATIONS MAY BE DETERMINED BY TENANT AND/OR THE SERVICING UTILITY COMPANY IN COMPLIANCE WITH LOCAL LAWS AND REGULATIONS.

NOTE:
 THESE PLANS ARE BASED ON INFORMATION OBTAINED SITE VISIT ON APRIL 01, 2014. THE SPRINT CONTRACTOR IS RESPONSIBLE TO VERIFYING ALL ITEMS AND NOTIFYING THE ENGINEER OF RECORD AND DISCREPANCIES.

SITE INFORMATION	AREA MAP	PROJECT DESCRIPTION	DRAWING INDEX																																																																											
<p>PROPERTY OWNER: RUTH & DAVID OPUSZYNSKI 285 CHAMBERLAIN HILL ROAD HIGGANUM, CT 06441</p> <p>TOWER OWNER: SBA PROPERTIES, LLC. 8051 CONGRESS AVENUE BOCA RATON, FL 33487 PHONE: (561)995-7670</p> <p>SBA REGIONAL SITE MANAGER: STEPHEN ROTH PHONE: 860-539-4920 SRoth@sbasite.com</p> <p>LATITUDE (NAD83): GOOGLE EARTH 2-C CONFIRMATION 41° 30' 06.43" N 41.501860°</p> <p>LONGITUDE (NAD83): GOOGLE EARTH 2-C CONFIRMATION -72° 37' 07.48" W -72.619279°</p> <p>COUNTY: MIDDLESEX</p> <p>ZONING JURISDICTION: CITY OF HIGGANUM</p> <p>POWER COMPANY: CL&P</p> <p>AAV PROVIDER: VERIZON</p> <p>SPRINT CONSTRUCTION MANAGER: MICHAEL DELIA PHONE: 781-316-6348 Michael.Delia@sprint.com</p> <p>EQUIPMENT SUPPLIER: ALCATEL-LUCENT 600 MOUNTAIN AVENUE MURRAY HILL, NJ 07974</p>	<p>LOCATION MAP GOOGLE EARTH 2-C CONFIRMATION</p>	<p>SPRINT EQUIPMENT MODIFICATIONS REQUIRED TO SUPPORT MODERNIZATION OF AN EXISTING WIRELESS COMMUNICATIONS FACILITY AND UTILIZATION OF FCC BROADBAND SPECTRUM LICENSE FOR 2.5GHz FREQUENCY, INCLUDING INSTALLATION OF:</p> <p>GROUND-LEVEL RAN EQUIPMENT, CONSISTING OF: * RETROFIT EXISTING MMBTS CABINET WITH (1) RECTIFIER SHELF, (3) RECTIFIERS, 2.5 RADIO ACCESS NETWORK (RAN) EQUIPMENT & BBU KIT * INSTALL (1) ADDITIONAL BATTERY STRING INSIDE EXISTING BATTERY BACKUP (BBU) CABINET</p> <p>TOWER-TOP EQUIPMENT, INCLUDING INSTALLATION OF: * (3) PANEL ANTENNAS * (3) REMOTE RADIO HEADS (RRH) * (1) HYBRID CABLE (AND ASSOCIATED FIBER, DC POWER, COAXIAL CABLE JUMPERS AND ANTENNA REMOTE ELECTRICAL-TILT (RET) CABLE</p> <p>SPECIAL ZONING NOTE: BASED ON INFORMATION PROVIDED BY SPRINT REGULATORY COMPLIANCE PROFESSIONALS AND LEGAL COUNSEL, THIS TELECOMMUNICATIONS EQUIPMENT DEPLOYMENT IS CONSIDERED AN ELIGIBLE FACILITY UNDER THE TAX RELIEF ACT OF 2012, 47 USC 1455(A), AND IS SUBJECT TO AN EXPEDITED ELIGIBLE FACILITIES REQUEST/REVIEW AND ZONING PRE-EMPTION FOR LOCAL DISCRETIONARY PERMITS (VARIANCE, SPECIAL PERMIT, SITE PLAN REVIEW, ADMINISTRATIVE REVIEW).</p>	<table border="1"> <thead> <tr> <th>SHEET NO:</th> <th>SHEET TITLE</th> <th>REV</th> <th>CHK</th> <th>BY</th> </tr> </thead> <tbody> <tr> <td>T-1</td> <td>TITLE SHEET</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> <tr> <td>SP-1</td> <td>OUTLINE SPECIFICATIONS</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> <tr> <td>SP-2</td> <td>OUTLINE SPECIFICATIONS</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> <tr> <td>SP-3</td> <td>OUTLINE SPECIFICATIONS</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> <tr> <td>A-1</td> <td>COMPOUND PLAN</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> <tr> <td>A-2</td> <td>ELEVATION AND ANTENNA PLANS</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> <tr> <td>A-3</td> <td>RF DATA SHEET</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> <tr> <td>A-4</td> <td>RAN WIRING DIAGRAM</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> <tr> <td>A-5</td> <td>EQUIPMENT DETAILS</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> <tr> <td>A-6</td> <td>EQUIPMENT DETAILS</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> <tr> <td>SN-1</td> <td>STRUCTURAL NOTES</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> <tr> <td>S-1</td> <td>STRUCTURAL DETAILS</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> <tr> <td>E-1</td> <td>ONE LINE DIAGRAM</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> <tr> <td>E-2</td> <td>GROUNDING DETAILS AND NOTES</td> <td>2</td> <td>BB</td> <td>DJM</td> </tr> </tbody> </table>	SHEET NO:	SHEET TITLE	REV	CHK	BY	T-1	TITLE SHEET	2	BB	DJM	SP-1	OUTLINE SPECIFICATIONS	2	BB	DJM	SP-2	OUTLINE SPECIFICATIONS	2	BB	DJM	SP-3	OUTLINE SPECIFICATIONS	2	BB	DJM	A-1	COMPOUND PLAN	2	BB	DJM	A-2	ELEVATION AND ANTENNA PLANS	2	BB	DJM	A-3	RF DATA SHEET	2	BB	DJM	A-4	RAN WIRING DIAGRAM	2	BB	DJM	A-5	EQUIPMENT DETAILS	2	BB	DJM	A-6	EQUIPMENT DETAILS	2	BB	DJM	SN-1	STRUCTURAL NOTES	2	BB	DJM	S-1	STRUCTURAL DETAILS	2	BB	DJM	E-1	ONE LINE DIAGRAM	2	BB	DJM	E-2	GROUNDING DETAILS AND NOTES	2	BB	DJM
SHEET NO:	SHEET TITLE	REV	CHK	BY																																																																										
T-1	TITLE SHEET	2	BB	DJM																																																																										
SP-1	OUTLINE SPECIFICATIONS	2	BB	DJM																																																																										
SP-2	OUTLINE SPECIFICATIONS	2	BB	DJM																																																																										
SP-3	OUTLINE SPECIFICATIONS	2	BB	DJM																																																																										
A-1	COMPOUND PLAN	2	BB	DJM																																																																										
A-2	ELEVATION AND ANTENNA PLANS	2	BB	DJM																																																																										
A-3	RF DATA SHEET	2	BB	DJM																																																																										
A-4	RAN WIRING DIAGRAM	2	BB	DJM																																																																										
A-5	EQUIPMENT DETAILS	2	BB	DJM																																																																										
A-6	EQUIPMENT DETAILS	2	BB	DJM																																																																										
SN-1	STRUCTURAL NOTES	2	BB	DJM																																																																										
S-1	STRUCTURAL DETAILS	2	BB	DJM																																																																										
E-1	ONE LINE DIAGRAM	2	BB	DJM																																																																										
E-2	GROUNDING DETAILS AND NOTES	2	BB	DJM																																																																										
	<p>CT33XC545: 41°30'6.43"N, 72°37'7.48"W, 587' AMSL</p>	<p>GENERAL NOTES</p> <ol style="list-style-type: none"> THIS IS AN UNMANNED TELECOMMUNICATION FACILITY AND NOT FOR HUMAN HABITATION: - ADA COMPLIANCE NOT REQUIRED. - POTABLE WATER OR SANITARY SERVICE IS NOT REQUIRED. - NO OUTDOOR STORAGE OR ANY SOLID WASTE RECEPTACLES REQUIRED. CONTRACTOR SHALL VERIFY ALL PLANS, EXISTING DIMENSIONS, AND CONDITIONS ON JOB SITE. CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT/ENGINEER IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK. FAILURE TO NOTIFY THE ARCHITECT/ENGINEER PLACE THE RESPONSIBILITY ON THE CONTRACTOR TO CORRECT THE DISCREPANCIES AT THE CONTRACTOR'S EXPENSE. NEW CONSTRUCTION WILL CONFORM TO ALL APPLICABLE CODES AND ORDINANCES. BUILDING CODE: IBC 2012 W/ 2016 CT STATE BUILDING CODE AMENDMENTS ELECTRICAL CODE: 2014 NATIONAL ELECTRICAL CODE STRUCTURAL CODE: (TIA) 222-G STRUCTURAL STANDARDS FOR ANTENNA SUPPORTING STRUCTURES AND ANTENNAS. 	<p>APPROVALS</p> <p>THE FOLLOWING PARTIES HEREBY APPROVE AND ACCEPT THESE DOCUMENTS AND AUTHORIZE THE CONTRACTOR TO PROCEED WITH THE CONSTRUCTION DESCRIBED HEREIN. ALL DOCUMENTS ARE SUBJECT TO REVIEW BY THE LOCAL BUILDING DEPARTMENT AND MAY IMPOSE CHANGES OR MODIFICATIONS.</p> <p>SPRINT: _____ DATE: _____</p> <p>CONSTRUCTION MANAGER: _____ DATE: _____</p> <p>LEASING/SITE ACQUISITION: _____ DATE: _____</p> <p>RF ENGINEER: _____ DATE: _____</p> <p>LANDLORD/TOWER OWNER: _____ DATE: _____</p>																																																																											
			<p>CHECKED BY: BB</p> <p>APPROVED BY: DJC</p> <p>SUBMITTALS</p> <table border="1"> <thead> <tr> <th>REV.</th> <th>DATE</th> <th>DESCRIPTION</th> <th>BY</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>01/26/18</td> <td>ISSUED FOR CONSTRUCTION</td> <td>DJM</td> </tr> <tr> <td>1</td> <td>05/16/14</td> <td>ISSUED FOR CONSTRUCTION</td> <td>SF</td> </tr> <tr> <td>0</td> <td>05/05/14</td> <td>ISSUED FOR CONSTRUCTION</td> <td>SF</td> </tr> </tbody> </table> <p>SITE NUMBER: CT33XC545-B</p> <p>SITE NAME: W. HIGGANUM</p> <p>SITE ADDRESS: 285 CHAMBERLAIN HILL ROAD HIGGANUM, CT 06441</p> <p>SHEET TITLE</p> <p>TITLE SHEET (DO MACRO)</p> <p>SHEET NUMBER</p> <p>T-1</p>	REV.	DATE	DESCRIPTION	BY	2	01/26/18	ISSUED FOR CONSTRUCTION	DJM	1	05/16/14	ISSUED FOR CONSTRUCTION	SF	0	05/05/14	ISSUED FOR CONSTRUCTION	SF																																																											
REV.	DATE	DESCRIPTION	BY																																																																											
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM																																																																											
1	05/16/14	ISSUED FOR CONSTRUCTION	SF																																																																											
0	05/05/14	ISSUED FOR CONSTRUCTION	SF																																																																											

THESE OUTLINE SPECIFICATIONS IN CONJUNCTION WITH THE SPRINT STANDARD CONSTRUCTION SPECIFICATIONS, INCLUDING CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

SECTION 01 100 – SCOPE OF WORK

PART 1 – GENERAL

1.1 THE WORK: THESE STANDARD CONSTRUCTION SPECIFICATIONS IN CONJUNCTION WITH THE SPRINT CONSTRUCTION STANDARDS FOR WIRELESS SITES, CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

1.2 RELATED DOCUMENTS:

- A. THE REQUIREMENTS OF THIS SECTION APPLY TO ALL SECTIONS IN THIS SPECIFICATION.
- B. SPRINT "STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES" ARE INCLUDED IN AND MADE A PART OF THESE SPECIFICATIONS HEREWITH.

1.3 PRECEDENCE: SHOULD CONFLICTS OCCUR BETWEEN THE STANDARD CONSTRUCTION SPECIFICATIONS FOR WIRELESS SITES INCLUDING THE STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES AND THE CONSTRUCTION DRAWINGS, INFORMATION ON THE CONSTRUCTION DRAWINGS SHALL TAKE PRECEDENCE. NOTIFY SPRINT CONSTRUCTION MANAGER IF THIS OCCURS.

1.4 NATIONALLY RECOGNIZED CODES AND STANDARDS:

- A. THE WORK SHALL COMPLY WITH APPLICABLE NATIONAL AND LOCAL CODES AND STANDARDS, LATEST EDITION, AND PORTIONS THEREOF, INCLUDED BUT NOT LIMITED TO THE FOLLOWING:
 1. GR-78-CORE GENERIC REQUIREMENTS FOR THE PHYSICAL DESIGN AND MANUFACTURE OF TELECOMMUNICATIONS EQUIPMENT.
 2. GR-1089 CORE, ELECTROMAGNETIC COMPATIBILITY AND ELECTRICAL SAFETY –GENERIC CRITERIA FOR NETWORK TELECOMMUNICATIONS EQUIPMENT.
 3. NATIONAL FIRE PROTECTION ASSOCIATION CODES AND STANDARDS (NFPA) INCLUDING NFPA 70 (NATIONAL ELECTRICAL CODE – "NEC") AND NFPA 101 (LIFE SAFETY CODE).
 4. AMERICAN SOCIETY FOR TESTING OF MATERIALS (ASTM)
 5. INSTITUTE OF ELECTRONIC AND ELECTRICAL ENGINEERS (IEEE)
 6. AMERICAN CONCRETE INSTITUTE (ACI)
 7. AMERICAN WIRE PRODUCERS ASSOCIATION (AWPA)
 8. CONCRETE REINFORCING STEEL INSTITUTE (CRSI)
 9. AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)
 10. PORTLAND CEMENT ASSOCIATION (PCA)
 11. NATIONAL CONCRETE MASONRY ASSOCIATION (NCMA)
 12. BRICK INDUSTRY ASSOCIATION (BIA)
 13. AMERICAN WELDING SOCIETY (AWS)
 14. NATIONAL ROOFING CONTRACTORS ASSOCIATION (NRCA)
 15. SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)
 16. DOOR AND HARDWARE INSTITUTE (DHI)
 17. OCCUPATIONAL SAFETY AND HEALTH ACT (OSHA)
 18. APPLICABLE BUILDING CODES INCLUDING UNIFORM BUILDING CODE, SOUTHERN BUILDING CODE, BOCA, AND THE INTERNATIONAL BUILDING CODE.

1.5 DEFINITIONS:

- A. WORK: THE SUM OF TASKS AND RESPONSIBILITIES IDENTIFIED IN THE CONTRACT DOCUMENTS.
- B. COMPANY: SPRINT CORPORATION
- C. ENGINEER: SYNONYMOUS WITH ARCHITECT & ENGINEER AND "A&E". THE DESIGN PROFESSIONAL HAVING PROFESSIONAL RESPONSIBILITY FOR DESIGN OF THE PROJECT.
- D. CONTRACTOR: CONSTRUCTION CONTRACTOR; CONSTRUCTION VENDOR; INDIVIDUAL OR ENTITY WHO AFTER EXECUTION OF A CONTRACT IS BOUND TO ACCOMPLISH THE WORK.
- E. THIRD PARTY VENDOR OR AGENCY: A VENDOR OR AGENCY ENGAGED SEPARATELY BY THE COMPANY, A&E, OR CONTRACTOR TO PROVIDE MATERIALS OR TO ACCOMPLISH SPECIFIC TASKS RELATED TO BUT NOT INCLUDED IN THE WORK.
- F. OFCI: OWNER FURNISHED, CONTRACTOR INSTALLED EQUIPMENT.
- G. CONSTRUCTION MANAGER – ALL PROJECTS RELATED COMMUNICATION TO FLOW THROUGH SPRINT REPRESENTATIVE IN CHARGE OF PROJECT...

1.6 SITE FAMILIARITY: CONTRACTOR SHALL BE RESPONSIBLE FOR FAMILIARIZING HIMSELF WITH ALL CONTRACT DOCUMENTS, FIELD CONDITIONS AND DIMENSIONS PRIOR TO PROCEEDING WITH CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE SPRINT CONSTRUCTION MANAGER PRIOR TO THE COMMENCEMENT OF WORK. NO COMPENSATION WILL BE AWARDED BASED ON CLAIM OF LACK OF KNOWLEDGE OR FIELD CONDITIONS.

1.7 POINT OF CONTACT: COMMUNICATION BETWEEN SPRINT AND THE CONTRACTOR SHALL FLOW THROUGH THE SINGLE SPRINT CONSTRUCTION MANAGER APPOINTED TO MANAGE THE PROJECT FOR SPRINT.

1.8 ON-SITE SUPERVISION: THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE WORK AND SHALL BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, AND PROCEDURES IN ACCORDANCE WITH THE CONTRACT DOCUMENTS. THE CONTRACTOR SHALL EMPLOY A COMPETENT SUPERINTENDENT WHO SHALL BE IN ATTENDANCE AT THE SITE AT ALL TIMES DURING PERFORMANCE OF THE WORK.

1.9 DRAWINGS, SPECIFICATIONS AND DETAILS REQUIRED AT JOBSITE: THE CONSTRUCTION CONTRACTOR SHALL MAINTAIN A FULL SET OF THE CONSTRUCTION DRAWINGS, STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES AND THE STANDARD CONSTRUCTION SPECIFICATIONS FOR WIRELESS SITES AT THE JOBSITE FROM MOBILIZATION THROUGH CONSTRUCTION COMPLETION.

- A. THE JOBSITE DRAWINGS, SPECIFICATIONS AND DETAILS SHALL BE CLEARLY MARKED DAILY IN RED PENCIL WITH ANY CHANGES IN CONSTRUCTION OVER WHAT IS DEPICTED IN THE DOCUMENTS. AT CONSTRUCTION COMPLETION, THIS JOBSITE MARKUP SET SHALL BE DELIVERED TO THE COMPANY OR COMPANY'S DESIGNATED REPRESENTATIVE TO BE FORWARDED TO THE COMPANY'S A&E VENDOR FOR PRODUCTION OF "AS-BUILT" DRAWINGS.
- B. DETAILS ARE INTENDED TO SHOW DESIGN INTENT. MODIFICATIONS MAY BE REQUIRED TO SUIT JOB DIMENSIONS OR CONDITIONS, AND SUCH MODIFICATIONS SHALL BE INCLUDED AS PART OF THE WORK. CONTRACTOR SHALL NOTIFY SPRINT CONSTRUCTION MANAGER OF ANY VARIATIONS PRIOR TO PROCEEDING WITH THE WORK.
- C. DIMENSIONS SHOWN ARE TO FINISH SURFACES UNLESS NOTED OTHERWISE. SPACING BETWEEN EQUIPMENT IS THE REQUIRED CLEARANCE. SHOULD THERE BE ANY QUESTIONS REGARDING THE CONTRACT DOCUMENTS, EXISTING CONDITIONS AND/OR DESIGN INTENT, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING A CLARIFICATION FROM THE SPRINT CONSTRUCTION MANAGER PRIOR TO PROCEEDING WITH THE WORK.

1.10 USE OF JOB SITE: THE CONTRACTOR SHALL CONFINE ALL CONSTRUCTION AND RELATED OPERATIONS INCLUDING STAGING AND STORAGE OF MATERIALS AND EQUIPMENT, PARKING, TEMPORARY FACILITIES, AND WASTE STORAGE TO THE LEASE PARCEL UNLESS OTHERWISE PERMITTED BY THE CONTRACT DOCUMENTS.

1.11 UTILITIES SERVICES: WHERE NECESSARY TO CUT EXISTING PIPES, ELECTRICAL WIRES, CONDUITS, CABLES, ETC., OF UTILITY SERVICES, OR OF FIRE PROTECTION OR COMMUNICATIONS SYSTEMS, THEY SHALL BE CUT AND CAPPED AT SUITABLE PLACES OR WHERE SHOWN. ALL SUCH ACTIONS SHALL BE COORDINATED WITH THE UTILITY COMPANY INVOLVED:

1.12 PERMITS / FEES: WHEN REQUIRED THAT A PERMIT OR CONNECTION FEE BE PAID TO A PUBLIC UTILITY PROVIDER FOR NEW SERVICE TO THE CONSTRUCTION PROJECT, PAYMENT OF SUCH FEE SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.

1.13 CONTRACTOR SHALL TAKE ALL MEASURES AND PROVIDE ALL MATERIAL NECESSARY FOR PROTECTING EXISTING EQUIPMENT AND PROPERTY.

1.14 METHODS OF PROCEDURE (MOPS) FOR CONSTRUCTION: CONTRACTOR SHALL PERFORM WORK AS DESCRIBED IN THE FOLLOWING INSTALLATION AND COMMISSIONING MOPS.

- A. TOP HAT
- B. HOW TO INSTALL A NEW CABINET
- C. BASE BAND UNIT IN EXISTING UNIT
- D. INSTALLATION OF BATTERIES
- E. INSTALLATION OF HYBRID CABLE
- F. INSTALLATION OF RRH'S
- G. CABLING
- H. SPRINT TS-0200 (CURRENT VERSION) – ANTENNA LINE ACCEPTANCE STANDARDS
- I. SPRINT CELL SITE ENGINEERING NOTICE – EN 2012-001, REV 1.
- J. COMMISSIONING MOPS
- K. SPRINT CELL SITE ENGINEERING NOTICE – EN-2013-002
- L. SPRINT ENGINEERING LETTER – EL-0504
- M. SPRINT ENGINEERING LETTER – EL-0568
- N. SPRINT TECHNICAL SPECIFICATION – TS-0193

1.15 USE OF ELECTRONIC PROJECT MANAGEMENT SYSTEMS:

- A. CONTRACTOR WILL UTILIZE ITS BEST EFFORTS TO WORK WITH SPRINT ELECTRONIC PROJECT MANAGEMENT SYSTEMS. CONTRACTOR UNDERSTANDS THAT SUFFICIENT INTERNET ACCESS, EQUIVALENT TO "BROADBAND" OR BETTER, IS REQUIRED TO TIMELY AND EFFECTIVELY UTILIZE SPRINT DATA AND DOCUMENT MANAGEMENT SYSTEMS AND AGREES TO MAINTAIN APPROPRIATE CONNECTIONS FOR CONTRACTOR'S STAFF AND OFFICES THAT ARE COMPATIBLE WITH SPRINT DATA AND DOCUMENT MANAGEMENT SYSTEMS

PART 2 – PRODUCTS (NOT USED)

PART 3 – EXECUTION

3.1 TEMPORARY UTILITIES AND FACILITIES: THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL TEMPORARY UTILITIES AND FACILITIES NECESSARY EXCEPT AS OTHERWISE INDICATED IN THE CONSTRUCTION DOCUMENTS. TEMPORARY UTILITIES AND FACILITIES INCLUDE POTABLE WATER, HEAT, HVAC, ELECTRICITY, SANITARY FACILITIES, WASTE DISPOSAL FACILITIES, AND TELEPHONE/COMMUNICATION SERVICES. PROVIDE TEMPORARY UTILITIES AND FACILITIES IN ACCORDANCE WITH OSHA AND THE AUTHORITY HAVING JURISDICTION. CONTRACTOR MAY UTILIZE THE COMPANY ELECTRICAL SERVICE IN THE COMPLETION OF THE WORK WHEN IT BECOMES AVAILABLE. USE OF THE LESSORS OR SITE OWNER'S UTILITIES OR FACILITIES IS EXPRESSLY FORBIDDEN EXCEPT AS OTHERWISE ALLOWED IN THE CONTRACT DOCUMENTS.

3.2 ACCESS TO WORK: THE CONTRACTOR SHALL PROVIDE ACCESS TO THE JOB SITE FOR AUTHORIZED COMPANY PERSONNEL AND AUTHORIZED REPRESENTATIVES OF THE ARCHITECT/ENGINEER DURING ALL PHASES OF THE WORK.

3.3 TESTING; REQUIREMENTS FOR TESTING BY THIS CONTRACTOR SHALL BE AS INDICATED HEREWITH, ON THE CONSTRUCTION DRAWINGS, AND IN THE INDIVIDUAL SECTIONS OF THESE SPECIFICATIONS. SHOULD COMPANY CHOOSE TO ENGAGE ANY THIRD-PARTY TO CONDUCT ADDITIONAL TESTING, THE CONTRACTOR SHALL COOPERATE WITH AND PROVIDE A WORK AREA FOR COMPANY'S TEST AGENCY.

3.4 DIMENSIONS: VERIFY DIMENSIONS INDICATED ON DRAWINGS WITH FIELD DIMENSIONS BEFORE FABRICATION OR ORDERING OF MATERIALS. DO NOT SCALE DRAWINGS.

3.5 EXISTING CONDITIONS: NOTIFY THE SPRINT CONSTRUCTION MANAGER OF EXISTING CONDITIONS DIFFERING FROM THOSE INDICATED ON THE DRAWINGS. DO NOT REMOVE OR ALTER STRUCTURAL COMPONENTS WITHOUT PRIOR WRITTEN APPROVAL FROM THE ARCHITECT AND ENGINEER.

SECTION 01 200 – COMPANY FURNISHED MATERIAL AND EQUIPMENT

PART 1 – GENERAL

1.1 THE WORK: THESE STANDARD CONSTRUCTION SPECIFICATIONS IN CONJUNCTION WITH THE OTHER CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

1.2 RELATED DOCUMENTS:

- A. THE REQUIREMENTS OF THIS SECTION APPLY TO ALL SECTIONS IN THIS SPECIFICATION.
- B. SPRINT "STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES" ARE INCLUDED IN AND MADE A PART OF THESE SPECIFICATIONS HEREWITH.

PART 2 – PRODUCTS (NOT USED)

PART 3 – EXECUTION

3.1 RECEIPT OF MATERIAL AND EQUIPMENT:

- A. COMPANY FURNISHED MATERIAL AND EQUIPMENT IS IDENTIFIED ON THE RF DATA SHEET IN THE CONSTRUCTION DOCUMENTS.
- B. THE CONTRACTOR IS RESPONSIBLE FOR SPRINT PROVIDED MATERIAL AND EQUIPMENT AND UPON RECEIPT SHALL:
 1. ACCEPT DELIVERIES AS SHIPPED AND TAKE RECEIPT.
 2. VERIFY COMPLETENESS AND CONDITION OF ALL DELIVERIES.
 3. TAKE RESPONSIBILITY FOR EQUIPMENT AND PROVIDE INSURANCE PROTECTION AS REQUIRED IN AGREEMENT.
 4. RECORD ANY DEFECTS OR DAMAGES AND WITHIN TWENTY-FOUR HOURS AFTER RECEIPT, REPORT TO SPRINT OR ITS DESIGNATED PROJECT REPRESENTATIVE OF SUCH.
 5. PROVIDE SECURE AND NECESSARY WEATHER PROTECTED WAREHOUSING.
 6. COORDINATE SAFE AND SECURE TRANSPORTATION OF MATERIAL AND EQUIPMENT, DELIVERING AND OFF-LOADING FROM CONTRACTOR'S WAREHOUSE TO SITE.

3.2 DELIVERABLES:

- A. COMPLETE SHIPPING AND RECEIPT DOCUMENTATION IN ACCORDANCE WITH COMPANY PRACTICE.
- B. IF APPLICABLE, COMPLETE LOST/STOLEN/DAMAGED DOCUMENTATION REPORT AS NECESSARY IN ACCORDANCE WITH COMPANY PRACTICE, AND AS DIRECTED BY COMPANY.
- C. UPLOAD DOCUMENTATION INTO SPRINT SITE MANAGEMENT SYSTEM (SMS) AND/OR PROVIDE HARD COPY DOCUMENTATION AS REQUESTED.

SECTION 01 300 – CELL SITE CONSTRUCTION

PART 1 – GENERAL

1.1 THE WORK: THESE STANDARD CONSTRUCTION SPECIFICATIONS IN CONJUNCTION WITH THE OTHER CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

1.2 RELATED DOCUMENTS:

- A. THE REQUIREMENTS OF THIS SECTION APPLY TO ALL SECTIONS IN THIS SPECIFICATION.
- B. SPRINT "STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES" ARE INCLUDED IN AND MADE A PART OF THESE SPECIFICATIONS HEREWITH.

1.3 NOTICE TO PROCEED:

- A. NO WORK SHALL COMMENCE PRIOR TO COMPANY'S WRITTEN NOTICE TO PROCEED AND THE ISSUANCE OF THE WORK ORDER.
- B. UPON RECEIVING NOTICE TO PROCEED, CONTRACTOR SHALL FULLY PERFORM ALL WORK NECESSARY TO PROVIDE SPRINT WITH AN OPERATIONAL WIRELESS FACILITY.

PART 2 – PRODUCTS (NOT USED)

PART 3 – EXECUTION

3.1 FUNCTIONAL REQUIREMENTS:

- A. THE ACTIVITIES DESCRIBED IN THIS PARAGRAPH REPRESENT MINIMUM ACTIONS AND PROCESSES REQUIRED TO SUCCESSFULLY COMPLETE THE WORK. THE ACTIVITIES DESCRIBED ARE NOT EXHAUSTIVE, AND CONTRACTOR SHALL TAKE ANY AND ALL ACTIONS AS NECESSARY TO SUCCESSFULLY COMPLETE THE CONSTRUCTION OF A FULLY FUNCTIONING WIRELESS FACILITY AT THE SITE IN ACCORDANCE WITH COMPANY PROCESSES.
- B. SUBMIT SPECIFIC DOCUMENTATION AS INDICATED HEREIN, AND OBTAIN REQUIRED APPROVALS WHILE THE WORK IS BEING PERFORMED.
- C. MANAGE AND CONDUCT ALL FIELD CONSTRUCTION SERVICE RELATED ACTIVITIES
- D. PROVIDE CONSTRUCTION ACTIVITIES TO THE EXTENT REQUIRED BY THE CONTRACT DOCUMENTS, INCLUDING BUT NOT LIMITED TO THE FOLLOWING:
 1. PERFORM ANY REQUIRED SITE ENVIRONMENTAL MITIGATION.
 2. PREPARE GROUND SITES; PROVIDE DE-GRUBBING; AND ROUGH AND FINAL GRADING, AND COMPOUND SURFACE TREATMENTS.
 3. MANAGE AND CONDUCT ALL ACTIVITIES FOR INSTALLATION OF UTILITIES INCLUDING ELECTRICAL AND TELCO BACKHAUL.
 4. INSTALL UNDERGROUND FACILITIES INCLUDING UNDERGROUND POWER AND COMMUNICATIONS CONDUITS, AND UNDERGROUND GROUNDING SYSTEM.
 5. INSTALL ABOVE GROUND GROUNDING SYSTEMS.
 6. PROVIDE NEW HVAC INSTALLATIONS AND MODIFICATIONS.
 7. INSTALL "H-FRAMES", CABINETS AND SHELTERS AS INDICATED.
 8. INSTALL ROADS, ACCESS WAYS, CURBS AND DRAINS AS INDICATED.
 9. ACCOMPLISH REQUIRED MODIFICATION OF EXISTING FACILITIES.
 10. PROVIDE ANTENNA SUPPORT STRUCTURE FOUNDATIONS.
 11. PROVIDE SLABS AND EQUIPMENT PLATFORMS.
 12. INSTALL COMPOUND FENCING, SIGHT SHIELDING, LANDSCAPING AND ACCESS BARRIERS.
 13. PERFORM INSPECTION AND MATERIAL TESTING AS REQUIRED HEREINAFTER.
 14. CONDUCT SITE RESISTANCE TO EARTH TESTING AS REQUIRED HEREINAFTER.
 15. INSTALL FIXED GENERATOR SETS AND OTHER STANDBY POWER SOLUTIONS.
 16. INSTALL TOWERS, ANTENNA SUPPORT STRUCTURES AND PLATFORMS ON EXISTING TOWERS AS REQUIRED.
 17. INSTALL CELL SITE RADIOS, MICROWAVE, GPS, COAXIAL MAINLINE, ANTENNAS, CROSS BAND COUPLERS, TOWER TOP AMPLIFIERS, LOW NOISE AMPLIFIERS AND RELATED EQUIPMENT.
 18. PERFORM, DOCUMENT, AND CLOSE OUT ANY CONSTRUCTION CONTROL DOCUMENTS THAT MAY BE REQUIRED BY GOVERNMENT AGENCIES AND LANDLORDS.
 19. PERFORM ANTENNA AND COAX SWEEP TESTING AND MAKE ANY AND ALL NECESSARY CORRECTIONS.
 20. REMAIN ON SITE MOBILIZED THROUGHOUT HAND-OFF AND INTEGRATION TO ASSIST AS NEEDED UNTIL SITE IS DEEMED SUBSTANTIALLY COMPLETE AND PLACED "ON AIR."

3.2 GENERAL REQUIREMENTS FOR CIVIL CONSTRUCTION:

- A. CONTRACTOR SHALL KEEP THE SITE FREE FROM ACCUMULATING WASTE MATERIAL, DEBRIS, AND TRASH. AT THE COMPLETION OF THE WORK, CONTRACTOR SHALL REMOVE FROM THE SITE ALL REMAINING RUBBISH, IMPLEMENTS, TEMPORARY FACILITIES, AND SURPLUS MATERIALS.
- B. EQUIPMENT ROOMS SHALL AT ALL TIMES BE MAINTAINED "BROOM CLEAN" AND CLEAR OF DEBRIS.
- C. CONTRACTOR SHALL TAKE ALL REASONABLE PRECAUTIONS TO DISCOVER AND LOCATE ANY HAZARDOUS CONDITION.
 1. IN THE EVENT CONTRACTOR ENCOUNTERS ANY HAZARDOUS CONDITION WHICH HAS NOT BEEN ABATED OR OTHERWISE MITIGATED, CONTRACTOR AND ALL OTHER PERSONS SHALL IMMEDIATELY STOP WORK IN THE AFFECTED AREA AND NOTIFY COMPANY IN WRITING. THE WORK IN THE AFFECTED AREA SHALL NOT BE RESUMED EXCEPT BY WRITTEN NOTIFICATION BY COMPANY.
 2. CONTRACTOR AGREES TO USE CARE WHILE ON THE SITE AND SHALL NOT TAKE ANY ACTION THAT WILL OR MAY RESULT IN OR CAUSE THE HAZARDOUS CONDITION TO BE FURTHER RELEASED IN THE ENVIRONMENT, OR TO FURTHER EXPOSE INDIVIDUALS TO THE HAZARD.
- D. CONTRACTOR'S ACTIVITIES SHALL BE RESTRICTED TO THE PROJECT LIMITS. SHOULD AREAS OUTSIDE THE PROJECT LIMITS BE AFFECTED BY CONTRACTOR'S ACTIVITIES, CONTRACTOR SHALL IMMEDIATELY RETURN THEM TO ORIGINAL CONDITION
- E. CONDUCT TESTING AS REQUIRED HEREIN.

3.3 DELIVERABLES:

- A. CONTRACTOR SHALL REVIEW, APPROVE, AND SUBMIT TO SPRINT SHOP DRAWINGS, PRODUCT DATA, SAMPLES, AND SIMILAR SUBMITTALS AS REQUIRED HEREINAFTER
- B. PROVIDE DOCUMENTATION INCLUDING, BUT NOT LIMITED TO, THE FOLLOWING. DOCUMENTATION SHALL BE FORWARDED IN ORIGINAL FORMAT AND/OR UPLOADED INTO SMS.
 1. ALL CORRESPONDENCE AND PRELIMINARY CONSTRUCTION REPORTS.
 2. PROJECT PROGRESS REPORTS.
 3. CIVIL CONSTRUCTION START DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 4. ELECTRICAL SERVICE COMPLETION DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 5. LINES AND ANTENNA INSTALL DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 6. POWER INSTALL DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 7. TELCO READY DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 8. PPC (OR SHELTER) INSTALL DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 9. TOWER CONSTRUCTION START DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 10. TOWER CONSTRUCTION COMPLETE DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 11. BTS AND RADIO EQUIPMENT DELIVERED AT SITE DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 12. NETWORK OPERATIONS HANDOFF CHECKLIST (HOC WALK) COMPLETE (UPLOAD FORM IN SMS)
 13. CIVIL CONSTRUCTION COMPLETE DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 14. SITE CONSTRUCTION PROGRESS PHOTOS UNLOADED INTO SMS.

CONTINUE SHEET SP-2




1 INTERNATIONAL BLVD, SUITE 800
MAHWAH, NJ 07495
TEL: (800) 357-7641



SBA COMMUNICATIONS CORP.
134 FLANDERS ROAD, SUITE 125
WESTBOROUGH, MA 01581
TEL: (508) 251-0720
FAX: (508) 251-1755



45 BEECHWOOD DRIVE
N. ANDOVER, MA 01845
TEL: (978) 557-5553
FAX: (978) 336-5586



CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN

CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS			
REV.	DATE	DESCRIPTION	BY
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM
1	05/16/14	ISSUED FOR CONSTRUCTION	SF
0	05/05/14	ISSUED FOR CONSTRUCTION	SF

SITE NUMBER:
CT33XC545-B

SITE NAME:
W. HIGGANUM

SITE ADDRESS:
285 CHAMBERLAIN HILL ROAD
HIGGANUM, CT 06441

SHEET TITLE
OUTLINE
SPECIFICATIONS
(DO MACRO)

SHEET NUMBER
SP-1

SECTION 01 400 – SUBMITTALS, TESTS, AND INSPECTIONS

PART 1 – GENERAL

1.1 **THE WORK:** THESE STANDARD CONSTRUCTION SPECIFICATIONS IN CONJUNCTION WITH THE OTHER CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

1.2 **RELATED DOCUMENTS:**

- A. THE REQUIREMENTS OF THIS SECTION APPLY TO ALL SECTIONS IN THIS SPECIFICATION.
- B. SPRINT "STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES" ARE INCLUDED IN AND MADE A PART OF THESE SPECIFICATIONS HEREWITH.

1.3 **SUBMITTALS:**

- A. THE WORK IN ALL ASPECTS SHALL COMPLY WITH THE CONSTRUCTION DRAWINGS AND THESE SPECIFICATIONS.
- B. SUBMIT THE FOLLOWING TO COMPANY REPRESENTATIVE FOR APPROVAL.
 - 1. CONCRETE MIX-DESIGNS FOR TOWER FOUNDATIONS, ANCHORS PIERS, AND CONCRETE PAVING.
 - 2. CONCRETE BREAK TESTS AS SPECIFIED HEREIN.
 - 3. SPECIAL FINISHES FOR INTERIOR SPACES, IF ANY.
 - 4. ALL EQUIPMENT AND MATERIALS SO IDENTIFIED ON THE CONSTRUCTION DRAWINGS.
 - 5. CHEMICAL GROUNDING DESIGN.
- C. ALTERNATES: AT THE COMPANY'S REQUEST, ANY ALTERNATIVES TO THE MATERIALS OR METHODS SPECIFIED SHALL BE SUBMITTED TO SPRINT'S CONSTRUCTION MANAGER FOR APPROVAL PRIOR TO BEING SHIPPED TO SITE. SPRINT WILL REVIEW AND APPROVE ONLY THOSE REQUESTS MADE IN WRITING. NO VERBAL APPROVALS WILL BE CONSIDERED. SUBMITTAL FOR APPROVAL SHALL INCLUDE A STATEMENT OF COST REDUCTION PROPOSED FOR USE OF ALTERNATE PRODUCT.

1.4 **TESTS AND INSPECTIONS:**

- A. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL CONSTRUCTION TESTS, INSPECTIONS AND PROJECT DOCUMENTATION.
- B. CONTRACTOR SHALL ACCOMPLISH TESTING INCLUDING BUT NOT LIMITED TO THE FOLLOWING:
 - 1. COAX SWEEPS AND FIBER TESTS PER SPRINT TS-0200 (CURRENT VERSION) ANTENNA LINE ACCEPTANCE STANDARDS.
 - 2. AGL, AZIMUTH AND DOWNTILT USING ELECTRONIC COMMERCIAL MADE-FOR-THE-PURPOSE ANTENNA ALIGNMENT TOOL.
 - 3. CONTRACTOR SHALL BE RESPONSIBLE FOR ANY AND ALL CORRECTIONS TO ANY WORK IDENTIFIED AS UNACCEPTABLE IN SITE INSPECTION ACTIVITIES AND/OR AS A RESULT OF TESTING.
- C. REQUIRED CLOSEOUT DOCUMENTATION INCLUDES, BUT IS NOT LIMITED TO THE FOLLOWING;
 - 1. AZIMUTH, DOWNTILT, AGL – UPLOAD REPORT FROM ANTENNA ALIGNMENT TOOL TO SITERRA TASK 465. INSTALLED AZIMUTH, DOWNTILT, AND AGL MUST CONFORM TO THE RF DATA SHEETS. SWEEP AND FIBER TESTS
 - 2. SCANABLE BARCODE PHOTOGRAPHS OF TOWER TOP AND INACCESSIBLE SERIALIZED EQUIPMENT
 - 3. ALL AVAILABLE JURISDICTIONAL INFORMATION
 - 4. PDF SCAN OF REDLINES PRODUCED IN FIELD
 - 5. ELECTRONIC AS-BUILT DRAWINGS IN AUTOCAD AND PDF FORMATS. ANY FIELD CHANGE MUST BE REFLECTED BY MODIFYING THE PLANS, ELEVATIONS, AND DETAILS IN THE DRAWING SETS. GENERAL NOTES INDICATING MODIFICATIONS WILL NOT BE ACCEPTED. CHANGES SHALL BE HIGHLIGHTED AS "CLOUDS" IDENTIFIED AS THE "AS-BUILT" CONDITION.
 - 6. LIEN WAIVERS
 - 7. FINAL PAYMENT APPLICATION
 - 8. REQUIRED FINAL CONSTRUCTION PHOTOS
 - 9. CONSTRUCTION AND COMMISSIONING CHECKLIST COMPLETE WITH NO DEFICIENT ITEMS
 - 10. ALL POST NTP TASKS INCLUDING DOCUMENT UPLOADS COMPLETED IN SITERRA (SPRINTS DOCUMENT REPOSITORY OF RECORD).

1.5 **COMMISSIONING:** PERFORM ALL COMMISSIONING AS REQUIRED BY APPLICABLE MOPS

1.6 **INTEGRATION:** PERFORM ALL INTEGRATION ACTIVITIES AS REQUIRED BY APPLICABLE MOPS

PART 2 – PRODUCTS (NOT USED)

PART 3 – EXECUTION

3.1 **REQUIREMENTS FOR TESTING:**

- A. THIRD PARTY TESTING AGENCY: WHEN THE USE OF A THIRD PARTY INDEPENDENT TESTING AGENCY IS REQUIRED, THE AGENCY THAT IS SELECTED MUST PERFORM SUCH WORK ON A REGULAR BASIS IN THE STATE WHERE THE PROJECT IS LOCATED AND HAVE A THOROUGH UNDERSTANDING OF LOCAL AVAILABLE MATERIALS, INCLUDING THE SOIL, ROCK, AND GROUNDWATER CONDITIONS.
 - 1. THE THIRD PARTY TESTING AGENCY IS TO BE FAMILIAR WITH THE APPLICABLE REQUIREMENTS FOR THE TESTS TO BE DONE, EQUIPMENT TO BE USED, AND ASSOCIATED HEALTH AND SAFETY ISSUES.
 - 2. EXPERIENCE IN SOILS, CONCRETE, MASONRY, AGGREGATE, AND ASPHALT TESTING USING ASTM, AASJTO, AND OTHER METHODS IS NEEDED.
 - 3. EXPERIENCE IN SOILS, CONCRETE, MASONRY, AGGREGATE, AND ASPHALT TESTING USING ASTM, AASJTO, AND OTHER METHODS IS NEEDED.

3.2 **REQUIRED TESTS:**

- A. CONTRACTOR SHALL ACCOMPLISH TESTING INCLUDING BUT NOT LIMITED TO THE FOLLOWING:
 - 1. CONCRETE CYLINDER BREAK TESTS FOR THE TOWER AND ANCHOR FOUNDATIONS AS SPECIFIED IN SECTION: PORTLAND CEMENT CONCRETE PAVING.
 - 2. ASPHALT ROADWAY COMPACTED THICKNESS, SURFACE SMOOTHNESS, AND COMPACTED DENSITY TESTING AS SPECIFIED IN SECTION: HOT MIX ASPHALT PAVING.
 - 3. FIELD QUALITY CONTROL TESTING AS SPECIFIED IN SECTION: PORTLAND CEMENT CONCRETE PAVING.
 - 4. TESTING REQUIRED UNDER SECTION: AGGREGATE BASE FOR ACCESS ROADS, PADS AND ANCHOR LOCATIONS
 - 5. STRUCTURAL BACKFILL COMPACTION TESTS FOR THE TOWER FOUNDATION.
 - 6. SITE RESISTANCE TO EARTH TESTING PER EXHIBIT: CELL SITE GROUNDING SYSTEM DESIGN.
 - 7. ANTENNA AND COAX SWEEP TESTS PER EXHIBIT: ANTENNA TRANSMISSION LINE ACCEPTANCE STANDARDS.
 - 8. GROUNDING AT ANTENNA MASTS FOR GPS AND ANTENNAS
 - 9. ALL OTHER TESTS REQUIRED BY COMPANY OR JURISDICTION.

3.3 **REQUIRED INSPECTIONS:**

- A. SCHEDULE INSPECTIONS WITH COMPANY REPRESENTATIVE.
- B. CONDUCT INSPECTIONS INCLUDING BUT NOT LIMITED TO THE FOLLOWING:
 - 1. GROUNDING SYSTEM INSTALLATION PRIOR TO EARTH CONCEALMENT DOCUMENTED WITH DIGITAL PHOTOGRAPHS BY CONTRACTOR, APPROVED BY A&E OR SPRINT REPRESENTATIVE.
 - 2. FORMING FOR CONCRETE AND REBAR PLACEMENT PRIOR TO POUR DOCUMENTED WITH DIGITAL PHOTOGRAPHS BY CONTRACTOR, APPROVED BY A&E OR SPRINT REPRESENTATIVE.
 - 3. COMPACTION OF BACKFILL MATERIALS; AGGREGATE BASE FOR ROADS, PADS, AND ANCHORS; ASPHALT PAVING; AND SHAFT BACKFILL FOR CONCRETE AND WOOD POLES, BY INDEPENDENT THIRD PARTY AGENCY.
 - 4. PRE- AND POST-CONSTRUCTION ROOFTOP AND STRUCTURAL INSPECTIONS ON EXISTING FACILITIES.
 - 5. TOWER ERECTION SECTION STACKING AND PLATFORM ATTACHMENT DOCUMENTED BY DIGITAL PHOTOGRAPHS BY THIRD PARTY AGENCY.
 - 6. ANTENNA AZIMUTH , DOWN TILT AND PER SUNLIGHT TOOL SUNSIGHT INSTRUMENTS – ANTENNALIGN ALIGNMENT TOOL (AAT)
 - 7. VERIFICATION DOCUMENTED WITH THE ANTENNA CHECKLIST REPORT, BY A&E, SITE DEVELOPMENT REP, OR RF REP.
 - 8. FINAL INSPECTION CHECKLIST AND HANDOFF WALK (HOC). SIGNED FORM SHOWING ACCEPTANCE BY FIELD OPS IS TO BE UPLOADED INTO SMS.
 - 9. COAX SWEEP AND FIBER TESTING DOCUMENTS SUBMITTED VIA SMS FOR RF APPROVAL.
 - 10. SCAN-ABLE BARCODE PHOTOGRAPHS OF TOWER TOP AND INACCESSIBLE SERIALIZED EQUIPMENT
 - 11. ALL AVAILABLE JURISDICTIONAL INFORMATION
 - 12. PDF SCAN OF REDLINES PRODUCED IN FIELD
- E. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY AND ALL CORRECTIONS TO ANY WORK IDENTIFIED AS UNACCEPTABLE IN SITE INSPECTION ACTIVITIES AND/OR AS A RESULT OF TESTING.
- F. CONSTRUCTION INSPECTIONS AND CORRECTIVE MEASURES SHALL BE DOCUMENTED BY THE CONTRACTOR WITH WRITTEN REPORTS AND PHOTOGRAPHS. PHOTOGRAPHS MUST BE DIGITAL AND OF SUFFICIENT QUALITY TO CLEARLY SHOW THE SITE CONSTRUCTION. PHOTOGRAPHS MUST CLEARLY IDENTIFY THE PHOTOGRAPHED ITEM AND BE LABELED WITH THE SITE CASCADE NUMBER, SITE NAME, DESCRIPTION, AND DATE.

3.4 **DELIVERABLES:** TEST AND INSPECTION REPORTS AND CLOSEOUT DOCUMENTATION SHALL BE UPLOADED TO THE SMS AND/OR FORWARDED TO SPRINT FOR INCLUSION INTO THE PERMANENT SITE FILES.

- A. THE FOLLOWING TEST AND INSPECTION REPORTS SHALL BE PROVIDED AS APPLICABLE.
 - 1. CONCRETE MIX AND CYLINDER BREAK REPORTS.
 - 2. STRUCTURAL BACKFILL COMPACTION REPORTS.
 - 3. SITE RESISTANCE TO EARTH TEST.
 - 4. ANTENNA AZIMUTH AND DOWN TILT VERIFICATION
 - 5. TOWER ERECTION INSPECTIONS AND MEASUREMENTS DOCUMENTING TOWER INSTALLED PER SUPPLIER'S REQUIREMENTS AND THE APPLICABLE SECTIONS HEREIN.
 - 6. COAX CABLE SWEEP TESTS PER COMPANY'S "ANTENNA LINE ACCEPTANCE STANDARDS".
- B. REQUIRED CLOSEOUT DOCUMENTATION INCLUDES THE FOLLOWING;
 - 1. TEST WELLS AND TRENCHES: PHOTOGRAPHS OF ALL TEST WELLS; PHOTOGRAPHS SHOWING ALL OPEN EXCAVATIONS AND TRENCHING PRIOR TO BACKFILLING SHOWING A TAPE MEASURE VISIBLE IN THE EXCAVATIONS INDICATING DEPTH.
 - 2. CONDUITS, CONDUCTORS AND GROUNDING: PHOTOGRAPHS SHOWING TYPICAL INSTALLATION OF CONDUCTORS AND CONNECTORS; PHOTOGRAPHS SHOWING TYPICAL BEND RADIUS OF INSTALLED GROUND WIRES AND GROUND ROD SPACING;
 - 3. CONCRETE FORMS AND REINFORCING: CONCRETE FORMING AT TOWER AND EQUIPMENT/SHELTER PAD/FOUNDATIONS – PHOTOGRAPHS SHOWING ALL REINFORCING STEEL, UTILITY AND CONDUIT STUB OUTS; PHOTOGRAPHS SHOWING CONCRETE POUR OF SHELTER SLAB/FOUNDATION, TOWER FOUNDATION AND GUY ANCHORS WITH VIBRATOR IN USE; PHOTOGRAPHS SHOWING EACH ANCHOR ON GUYED TOWERS, BEFORE CONCRETE POUR.
 - 4. TOWER, ANTENNAS AND MAINLINE: INSPECTION AND PHOTOGRAPHS OF SECTION STACKING; INSPECTION AND PHOTOGRAPHS OF PLATFORM COMPONENT ATTACHMENT POINTS; PHOTOGRAPHS OF TOWER TOP GROUNDING; PHOTOS OF TOWER COAX LINE COLOR CODING AT THE TOP AND AT GROUND LEVEL; INSPECTION AND PHOTOGRAPHS OF OPERATIONAL OF TOWER LIGHTING, AND PLACEMENT OF FAA REGISTRATION SIGN; PHOTOGRAPHS SHOWING ADDITIONAL GROUNDING POINTS FOR TOWERS GREATER THAN 200 FEET.; PHOTOS OF ANTENNA GROUND BAR, EQUIPMENT GROUND BAR, AND MASTER GROUND BAR; PHOTOS OF GPS ANTENNA(S); PHOTOS OF EACH SECTOR OF ANTENNAS; ONE PHOTOGRAPH LOOKING AT THE SECTOR AND ONE FROM BEHIND SHOWING THE PROJECTED COVERAGE AREA; PHOTOS OF COAX WEATHERPROOFING – TOP AND BOTTOM; PHOTOS OF COAX GROUNDING--TOP AND BOTTOM; PHOTOS OF ANTENNA AND MAST GROUNDING; PHOTOS OF COAX CABLE ENTRY INTO SHELTER; PHOTOS OF PLATFORM MECHANICAL CONNECTIONS TO TOWER/MONOPOLE.
 - 5. ROOF TOPS: PRE-CONSTRUCTION AND POST-CONSTRUCTION VISUAL INSPECTION AND PHOTOGRAPHS OF THE ROOF AND INTERIOR TO DETERMINE AND DOCUMENT CONDITIONS; ROOF TOP CONSTRUCTION INSPECTIONS AS REQUIRED BY THE JURISDICTION; PHOTOGRAPHS OF CABLE TRAY AND/OR ICE BRIDGE; PHOTOGRAPHS OF DOGHOUSE/CABLE EXIT FROM ROOF;
 - 6. SITE LAYOUT – PHOTOGRAPHS OF THE OVERALL COMPOUND, INCLUDING EQUIPMENT PLATFORM FROM ALL FOUR CORNERS.
 - 7. FINISHED UTILITIES: CLOSE-UP PHOTOGRAPHS OF THE PPC BREAKER PANEL; CLOSE-UP PHOTOGRAPH OF THE INSIDE OF THE TELCO PANEL AND NIU; CLOSE-UP PHOTOGRAPH OF THE POWER METER AND DISCONNECT; PHOTOS OF POWER AND TELCO ENTRANCE TO COMPANY ENCLOSURE; PHOTOGRAPHS AT METER BOX AND/OR FACILITY DISTRIBUTION PANEL.
 - 8. REQUIRED MATERIALS CERTIFICATIONS: CONCRETE MIX DESIGNS; MILL CERTIFICATION FOR ALL REINFORCING AND STRUCTURAL STEEL; AND ASPHALT PAVING MIX DESIGN.
 - 9. ANY AND ALL SUBMITTALS BY THE JURISDICTION OR COMPANY.

SECTION 01 500 – PROJECT REPORTING

PART 1 – GENERAL

1.1 **THE WORK:** THESE STANDARD CONSTRUCTION SPECIFICATIONS IN CONJUNCTION WITH THE OTHER CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

1.2 **RELATED DOCUMENTS:**

- A. THE REQUIREMENTS OF THIS SECTION APPLY TO ALL SECTIONS IN THIS SPECIFICATION.
- B. SPRINT "STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES" ARE INCLUDED IN AND MADE A PART OF THESE SPECIFICATIONS HEREWITH.

PART 2 – PRODUCTS (NOT USED)

PART 3 – EXECUTION

3.1 **WEEKLY REPORTS:**

A. CONTRACTOR SHALL PROVIDE SPRINT WITH WEEKLY REPORTS SHOWING PROJECT STATUS. THIS STATUS REPORT FORMAT WILL BE PROVIDED TO THE CONTRACTOR BY SPRINT. THE REPORT WILL CONTAIN SITE ID NUMBER, THE MILESTONES FOR EACH SITE, INCLUDING THE BASELINE DATE, ESTIMATED COMPLETION DATE AND ACTUAL COMPLETION DATE.

B. REPORT INFORMATION WILL BE TRANSMITTED TO SPRINT VIA ELECTRONIC MEANS AS REQUIRED. THIS INFORMATION WILL PROVIDE A BASIS FOR PROGRESS MONITORING AND PAYMENT.

3.2 **PROJECT CONFERENCE CALLS:**

A. SPRINT MAY HOLD WEEKLY PROJECT CONFERENCE CALLS. CONTRACTOR WILL BE REQUIRED TO COMMUNICATE SITE STATUS, MILESTONE COMPLETIONS AND UPCOMING MILESTONE PROJECTIONS, AND ANSWER ANY OTHER SITE STATUS QUESTIONS AS NECESSARY.

3.3 **PROJECT TRACKING IN SMS:**

A. CONTRACTOR SHALL PROVIDE SCHEDULE UPDATES AND PROJECTIONS IN THE SMS SYSTEM ON A WEEKLY BASIS.

3.4 **ADDITIONAL REPORTING:**

A. ADDITIONAL OR ALTERNATE REPORTING REQUIREMENTS MAY BE ADDED TO THE REPORT AS DETERMINED TO BE REASONABLY NECESSARY BY COMPANY.

3.5 **PROJECT PHOTOGRAPHS:**

- A. FILE DIGITAL PHOTOGRAPHS OF COMPLETED SITE IN JPEG FORMAT IN THE SMS PHOTO LIBRARY FOR THE RESPECTIVE SITE. PHOTOGRAPHS SHALL BE CLEARLY LABELED WITH SITE NUMBER, NAME AND DESCRIPTION, AND SHALL INCLUDE AT A MINIMUM THE FOLLOWING AS APPLICABLE:
 - 1. SHELTER AND TOWER OVERVIEW.
 - 2. TOWER FOUNDATION(S) – FORMS AND STEEL BEFORE POUR (EACH ANCHOR ON GUYED TOWERS).
 - 3. TOWER FOUNDATION(S) POUR WITH VIBRATOR IN USE (EACH ANCHOR ON GUYED TOWERS).
 - 4. TOWER STEEL AS BEING INSTALLED INTO HOLE (SHOW ANCHOR STEEL ON GUYED TOWERS).
 - 5. PHOTOS OF TOWER SECTION STACKING.
 - 6. CONCRETE TESTING / SAMPLES.
 - 7. PLACING OF ANCHOR BOLTS IN TOWER FOUNDATION.
 - 8. BUILDING/WATER TANK FROM ROAD FOR TENANT IMPROVEMENTS OR COMMENTS.
 - 9. SHELTER FOUNDATION--FORMS AND STEEL BEFORE POURING.
 - 10. SHELTER FOUNDATION POUR WITH VIBRATOR IN USE.
 - 11. COAX CABLE ENTRY INTO SHELTER.
 - 12. PLATFORM MECHANICAL CONNECTIONS TO TOWER/MONOPOLE.
 - 13. ROOFTOP PRE AND POST CONSTRUCTION PHOTOS TO INCLUDE PENETRATIONS AND INTERIOR CEILING.
 - 14. PHOTOS OF TOWER TOP COAX LINE COLOR CODING AND COLOR CODING AT GROUND LEVEL.
 - 15. PHOTOS OF ALL APPROPRIATE COMPANY OR REGULATORY SIGNAGE.
 - 16. PHOTOS OF EQUIPMENT BOLT DOWN INSIDE SHELTER.
 - 17. POWER AND TELCO ENTRANCE TO COMPANY ENCLOSURE AND POWER AND TELCO SUPPLY LOCATIONS INCLUDING METER/DISCONNECT.
 - 18. ELECTRICAL TRENCH(S) WITH ELECTRICAL / CONDUIT BEFORE BACKFILL.
 - 19. ELECTRICAL TRENCH(S) WITH FOIL-BACKED TAPE BEFORE FURTHER BACKFILL.
 - 20. TELCO TRENCH WITH TELEPHONE / CONDUIT BEFORE BACKFILL.
 - 21. TELCO TRENCH WITH FOIL-BACKED TAPE BEFORE FURTHER BACKFILL.
 - 22. SHELTER GROUND-RING TRENCH WITH GROUND-WIRE BEFORE BACKFILL (SHOW ALL CAD WELDS AND BEND RADI).
 - 23. TOWER GROUND-RING TRENCH WITH GROUND-WIRE BEFORE BACKFILL (SHOW ALL CAD WELDS AND BEND RADI).
 - 24. FENCE GROUND-RING TRENCH WITH GROUND-WIRE BEFORE BACKFILL (SHOW ALL CAD WELDS AND BEND RADI).
 - 25. ALL BTS GROUND CONNECTIONS.
 - 26. ALL GROUND TEST WELLS.
 - 27. ANTENNA GROUND BAR AND EQUIPMENT GROUND BAR.
 - 28. ADDITIONAL GROUNDING POINTS ON TOWERS ABOVE 200'.
 - 29. HVAC UNITS INCLUDING CONDENSERS ON SPLIT SYSTEMS.
 - 30. GPS ANTENNAS.
 - 31. CABLE TRAY AND/OR WAVEGUIDE BRIDGE.
 - 32. DOGHOUSE/CABLE EXIT FROM ROOF.
 - 33. EACH SECTOR OF ANTENNAS; ONE PHOTOGRAPH LOOKING AT THE SECTOR AND ONE FROM BEHIND SHOWING THE PROJECTED COVERAGE AREA.
 - 34. MASTER BUS BAR.
 - 35. TELCO BOARD AND NIU.
 - 36. ELECTRICAL DISTRIBUTION WALL.
 - 37. CABLE ENTRY WITH SURGE SUPPRESSION.
 - 38. ENTRANCE TO EQUIPMENT ROOM.
 - 39. COAX WEATHERPROOFING--TOP AND BOTTOM OF TOWER.
 - 40. COAX GROUNDING --TOP AND BOTTOM OF TOWER.
 - 41. ANTENNA AND MAST GROUNDING.
 - 42. LANDSCAPING – WHERE APPLICABLE.

3.6 **FINAL PROJECT ACCEPTANCE:** COMPLETE ALL REQUIRED REPORTING TASKS PER CONTRACT, CONTRACT DOCUMENTS OR THE SPRINT INTEGRATED CONSTRUCTION STANDARDS FOR WIRELESS SITES AND UPLOAD INTO SITERRA.

SECTION 07 500 – ROOF CUTTING, PATCHING AND REPAIR

SUMMARY:

THIS SECTION SPECIFIES CUTTING AND PATCHING EXISTING ROOFING SYSTEMS WHERE CONDUIT OR CABLES EXIT THE BUILDING ONTO THE ROOF OR BUILDING-MOUNTED ANTENNAS, AND AS REQUIRED FOR WATERTIGHT PERFORMANCE. ROOFTOP ENTRY OPENINGS IN MEMBRANE ROOFTOPS SHALL BE CONSTRUCTED TO COMPLY WITH LANDLORD, ANY EXISTING WARRANTY, AND LOCAL JURISDICTIONAL STANDARDS.

1.4 **SUBMITTALS:**

- A. **PRE-CONSTRUCTION ROOF PHOTOS:** COMPLETE A ROOF INSPECTION PRIOR TO THE INSTALLATION OF SPRINT EQUIPMENT ON ANY ROOFTOP BUILD. AT A MINIMUM INSPECT AND PHOTOGRAPH (MINIMUM 3 EA.) ALL AREAS IMPACTED BY THE ADDITION OF THE SPRINT EQUIPMENT.
- B. PROVIDE SIMILAR PHOTOGRAPHS SHOWING ROOF CONDITIONS AFTER CONSTRUCTION (MINIMUM 3 EA.)
- C. ROOF INSPECTION PHOTOGRAPHS SHOULD BE UPLOADED WITH CLOSEOUT PHOTOGRAPHS.

SECTION 09 900 – PAINTING

QUALITY ASSURANCE:

- A. COMPLY WITH GOVERNING CODES AND REGULATIONS. PROVIDE PRODUCTS OF ACCEPTABLE MANUFACTURERS WHICH HAVE BEEN IN SATISFACTORY USE IN SIMILAR SERVICE FOR THREE YEARS. USE EXPERIENCED INSTALLERS. DELIVER, HANDLE, AND STORE MATERIALS IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.
- B. COMPLY WITH ALL ENVIRONMENTAL REGULATIONS FOR VOLATILE ORGANIC COMPOUNDS.




1 INTERNATIONAL BLVD, SUITE 800
MAHWAH, NJ 07495
TEL: (800) 357-7641



SBA COMMUNICATIONS CORP.
134 FLANDERS ROAD, SUITE 125
WESTBOROUGH, MA 01581
TEL: (508) 251-0720
FAX: (508) 251-1755



45 BEECHWOOD DRIVE
N. ANDOVER, MA 01845
TEL: (978) 557-5553
FAX: (978) 336-5586



CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN

CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM
1	05/16/14	ISSUED FOR CONSTRUCTION	SF
0	05/05/14	ISSUED FOR CONSTRUCTION	SF

SITE NUMBER:
CT33XC545-B

SITE NAME:
W. HIGGANUM

SITE ADDRESS:
285 CHAMBERLAIN HILL ROAD
HIGGANUM, CT 06441

SHEET TITLE

OUTLINE
SPECIFICATIONS
(DO MACRO)

SHEET NUMBER

SP-2

CONTINUED FROM SP-2:

MATERIALS:

A. MANUFACTURERS: BENJAMIN MOORE, ICI DEVOE COATINGS, PPG, SHERWIN WILLIAMS OR APPROVED EQUAL. PROVIDE PREMIUM GRADE, PROFESSIONAL-QUALITY PRODUCTS FOR COATING SYSTEMS.

PAINT SCHEDULE:

A. EXTERIOR ANTENNAE AND ANTENNA MOUNTING HARDWARE: ONE COAT OF PRIMER AND TWO FINISH COATS. PAINT FOR ANTENNAE SHALL BE NON-METALLIC BASED AND CONTAIN NO METALLIC PARTICLES. PROVIDE COLORS AND PATTERNS AS REQUIRED TO MASK APPEARANCE OF ANTENNAE ON ADJACENT BUILDING SURFACES AND AS ACCEPTABLE TO THE OWNER. REFER TO ANTENNA MANUFACTURER'S INSTRUCTIONS WHENEVER POSSIBLE.

B. ROOF TOP CONSTRUCTION: TOUCH UP - PREPARE SURFACES TO BE REPAIRED. FOLLOW INDUSTRY STANDARDS AND REQUIREMENTS OF OWNER TO MATCH EXISTING COATING AND FINISH.

PAINTING APPLICATION:

- 1. INSPECT SURFACES, REPORT UNSATISFACTORY CONDITIONS IN WRITING; BEGINNING WORK MEANS ACCEPTANCE OF SUBSTRATE.
2. COMPLY WITH MANUFACTURER'S INSTRUCTIONS AND RECOMMENDATIONS FOR PREPARATION, PRIMING AND COATING WORK. COORDINATE WITH WORK OF OTHER SECTIONS.
3. MATCH APPROVED MOCK-UPS FOR COLOR, TEXTURE, AND PATTERN. RE-COAT OR REMOVE AND REPLACE WORK WHICH DOES NOT MATCH OR SHOWS LOSS OF ADHESION.
4. CLEAN UP, TOUCH UP AND PROTECT WORK.

TOUCHUP PAINTING:

- 1. GALVANIZING DAMAGE AND ALL BOLTS AND NUTS SHALL BE TOUCHED UP AFTER TOWER ERECTION WITH "GALVANOX," "DRY GALV," OR "ZINC-IT."
2. FIELD TOUCHUP PAINT SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURER'S WRITTEN INSTRUCTIONS.
3. ALL METAL COMPONENTS SHALL BE HANDLED WITH CARE TO PREVENT DAMAGE TO THE COMPONENTS, THEIR PRESERVATIVE TREATMENT, OR THEIR PROTECTIVE COATINGS.

SECTION 11 700 - ANTENNA ASSEMBLY, REMOTE RADIO HEADS AND CABLE INSTALLATION

SUMMARY:

THIS SECTION SPECIFIES INSTALLATION OF ANTENNAS, RRH'S, AND CABLE EQUIPMENT, INSTALLATION, AND TESTING OF COAXIAL FIBER CABLE.

ANTENNAS AND RRH'S:

THE NUMBER AND TYPE OF ANTENNAS AND RRH'S TO BE INSTALLED IS DETAILED ON THE CONSTRUCTION DRAWINGS.

HYBRID CABLE:

HYBRID CABLE WILL BE DC/FIBER AND FURNISHED FOR INSTALLATION AT EACH SITE. CABLE SHALL BE INSTALLED PER THE CONSTRUCTION DRAWINGS AND THE APPLICABLE MANUFACTURER'S REQUIREMENTS.

JUMPERS AND CONNECTORS:

FURNISH AND INSTALL 1/2" COAX JUMPER CABLES BETWEEN THE RRH'S AND ANTENNAS. JUMPERS SHALL BE TYPE LDF 4, FLC 12-50, CR 540, OR FXL 540. SUPER-FLEX CABLES ARE NOT ACCEPTABLE. JUMPERS BETWEEN THE RRH'S AND ANTENNAS OR TOWER TOP AMPLIFIERS SHALL CONSIST OF 1/2 INCH FOAM DIELECTRIC, OUTDOOR RATED COAXIAL CABLE. DO NOT USE SUPERFLEX OUTDOORS. JUMPERS SHALL BE FACTORY FABRICATED IN APPROPRIATE LENGTHS WITH A MAXIMUM OF 4 FEET EXCESS PER JUMPER AND HAVE CONNECTORS AT EACH END, MANUFACTURED BY SUPPLIER. IF JUMPERS ARE FIELD FABRICATED, FOLLOW MANUFACTURER'S REQUIREMENTS FOR INSTALLATION OF CONNECTORS

REMOTE ELECTRICAL TILT (RET) CABLES:

MISCELLANEOUS:

INSTALL SPLITTERS, COMBINERS, FILTERS PER RF DATA SHEET, FURNISHED BY SPRINT.

ANTENNA INSTALLATION:

THE CONTRACTOR SHALL ASSEMBLE ALL ANTENNAS ONSITE IN ACCORDANCE WITH THE INSTRUCTIONS SUPPLIED BY THE MANUFACTURER. ANTENNA HEIGHT, AZIMUTH, AND FEED ORIENTATION INFORMATION SHALL BE A DESIGNATED ON THE CONSTRUCTION DRAWINGS.

- A. THE CONTRACTOR SHALL POSITION THE ANTENNA ON TOWER PIPE MOUNTS SO THAT THE BOTTOM STRUT IS LEVEL. THE PIPE MOUNTS SHALL BE PLUMB TO WITHIN 1 DEGREE.
B. ANTENNA MOUNTING REQUIREMENTS: PROVIDE ANTENNA MOUNTING HARDWARE AS INDICATED ON THE DRAWINGS.

HYBRID CABLES INSTALLATION:

- A. THE CONTRACTOR SHALL ROUTE, TEST, AND INSTALL ALL CABLES AS INDICATED ON THE CONSTRUCTION DRAWINGS AND IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
B. THE INSTALLED RADIUS OF THE CABLES SHALL NOT BE LESS THAN THE MANUFACTURER'S SPECIFICATIONS FOR BENDING RADII.
C. EXTREME CARE SHALL BE TAKEN TO AVOID DAMAGE TO THE CABLES DURING HANDLING AND INSTALLATION.
1. FASTENING MAIN HYBRID CABLES: ALL CABLES SHALL BE PERMANENTLY FASTENED TO THE COAX LADDER AT 4'-0" OC USING NON-MAGNETIC STAINLESS STEEL CLIPS.
2. FASTENING INDIVIDUAL FIBER AND DC CABLES ABOVE BREAKOUT ENCLOSURE (MEDUSA), WITHIN THE MMBTS CABINET AND ANY INTERMEDIATE DISTRIBUTION BOXES:
a. FIBER: SUPPORT FIBER BUNDLES USING 1/2" VELCRO STRAPS OF THE REQUIRED LENGTH @ 18" OC. STRAPS SHALL BE UV, OIL AND WATER RESISTANT AND SUITABLE FOR INDUSTRIAL INSTALLATIONS AS MANUFACTURED BY TEXTOL OR APPROVED EQUAL.
b. DC: SUPPORT DC BUNDLES WITH ZIP TIES OF THE ADEQUATE LENGTH. ZIP TIES TO BE UV STABILIZED, BLACK NYLON, WITH TENSILE STRENGTH AT 12,000 PSI AS MANUFACTURED BY NELCO PRODUCTS OR EQUAL.
3. FASTENING JUMPERS: SECURE JUMPERS TO THE SIDE ARMS OR HEAD FRAMES USING STAINLESS STEEL TIE WRAPS OR STAINLESS STEEL BUTTERFLY CLIPS.
4. CABLE INSTALLATION:
a. INSPECT CABLE PRIOR TO USE FOR SHIPPING DAMAGE, NOTIFY THE CONSTRUCTION MANAGER.
b. CABLE ROUTING: CABLE INSTALLATION SHALL BE PLANNED TO ENSURE THAT THE LINES WILL BE PROPERLY ROUTED IN THE CABLE ENVELOP AS INDICATED ON THE DRAWINGS. AVOID TWISTING AND CROSSOVERS.
c. HOIST CABLE USING PROPER HOISTING GRIPS. DO NOT EXCEED MANUFACTURER'S RECOMMENDED MAXIMUM BEND RADIUS.

- 5. GROUNDING OF TRANSMISSION LINES: ALL TRANSMISSION LINES SHALL BE GROUNDED AS INDICATED ON DRAWINGS.
6. HYBRID CABLE COLOR CODING: ALL COLOR CODING SHALL BE AS REQUIRED IN TS 0200 REV 4.
7. HYBRID CABLE LABELING: INDIVIDUAL HYBRID AND DC BUNDLES SHALL BE LABELED ALPHA-NUMERICALLY ACCORDING TO SPRINT CELL SITE ENGINEERING NOTICE - EN 2012-001, REV 1

WEATHERPROOFING EXTERIOR CONNECTORS AND HYBRID CABLE GROUND KITS:

- A. ALL FIBER & COAX CONNECTORS AND GROUND KITS SHALL BE WEATHERPROOFED.
B. WEATHERPROOFED USING ONE OF THE FOLLOWING METHODS. ALL INSTALLATIONS MUST BE DONE IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND INDUSTRY BEST PRACTICES.
1. COLD SHRINK: ENCOMPASS CONNECTOR IN COLD SHRINK TUBING AND PROVIDE A DOUBLE WRAP OF 2" ELECTRICAL TAPE EXTENDING 2" BEYOND TUBING. PROVIDE 3M COLD SHRINK CXS SERIES OR EQUAL.
2. SELF-AMALGAMATING TAPE: CLEAN SURFACES. APPLY A DOUBLE WRAP OF SELF-AMALGAMATING TAPE 2" BEYOND CONNECTOR. APPLY A SECOND WRAP OF SELF-AMALGAMATING TAPE IN OPPOSITE DIRECTION. APPLY DOUBLE WRAP OF 2" WIDE ELECTRICAL TAPE EXTENDING 2" BEYOND THE SELF-AMALGAMATING TAPE.
3. 3M SLIM LOCK CLOSURE 716: SUBSTITUTIONS WILL NOT BE ALLOWED.
4. OPEN FLAME ON JOB SITE IS NOT ACCEPTABLE

SECTION 11 800 - INSTALLATION OF MULTIMODAL BASE STATIONS (MMBTS) AND RELATED EQUIPMENT

SUMMARY:

- A. THIS SECTION SPECIFIES MMBTS CABINETS, POWER CABINETS, AND INTERNAL EQUIPMENT INCLUDING BY NOT LIMITED TO RECTIFIERS, POWER DISTRIBUTION UNITS, BASE BAND UNITS, SURGE ARRESTORS, BATTERIES, AND SIMILAR EQUIPMENT FURNISHED BY THE COMPANY FOR INSTALLATION BY THE CONTRACTOR (OFCI).
B. CONTRACTOR SHALL PROVIDE AND INSTALL ALL MISCELLANEOUS MATERIALS AND PROVIDE ALL LABOR REQUIRED FOR INSTALLATION EQUIPMENT IN EXISTING CABINET OR NEW CABINET AS SHOWN ON DRAWINGS AND AS REQUIRE BY THE APPLICABLE INSTALLATION MOPS.
C. COMPLY WITH MANUFACTURERS INSTALLATION AND START-UP REQUIREMENTS

DC CIRCUIT BREAKER LABELING

- A. LABEL CIRCUIT BREAKERS ACCORDING TO SPRINT CELL SITE ENGINEERING NOTICE - EN 2012-001, REV 1.

SECTION 11 800 - INSTALLATION OF MULTIMODAL BASE TRANSCIEVER STATIONS (MMBTS) AND RELATED EQUIPMENT

SUMMARY:

- A. THIS SECTION SPECIFIES MMBTS CABINETS, POWER CABINETS, AND INTERNAL EQUIPMENT INCLUDING BY NOT LIMITED TO RECTIFIERS, POWER DISTRIBUTION UNITS, BASE BAND UNITS, SURGE ARRESTORS, BATTERIES, AND SIMILAR EQUIPMENT FURNISHED BY THE COMPANY FOR INSTALLATION BY THE CONTRACTOR (OFCI).
B. CONTRACTOR SHALL PROVIDE AND INSTALL ALL MISCELLANEOUS MATERIALS AND PROVIDE ALL LABOR REQUIRED FOR INSTALLATION EQUIPMENT IN EXISTING CABINET OR NEW CABINET AS SHOWN ON DRAWINGS AND AS REQUIRE BY THE APPLICABLE INSTALLATION MOPS.
C. COMPLY WITH MANUFACTURERS INSTALLATION AND START-UP REQUIREMENTS

SUPPORTING DEVICES:

- A. MANUFACTURED STRUCTURAL SUPPORT MATERIALS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS BY THE FOLLOWING:
1. ALLIED TUBE AND CONDUIT
2. B-LINE SYSTEM
3. UNISTRUT DIVERSIFIED PRODUCTS
4. THOMAS & BETTS
B. FASTENERS: TYPES, MATERIALS, AND CONSTRUCTION FEATURES AS FOLLOWS:
1. EXPANSION ANCHORS: CARBON STEEL WEDGE OR SLEEVE TYPE.
2. POWER-DRIVEN THREADED STUDS: HEAT-TREATED STEEL, DESIGNED SPECIFICALLY FOR THE INTENDED SERVICE.
3. FASTEN BY MEANS OF WOOD SCREWS ON WOOD.
4. TOGGLE BOLTS ON HOLLOW MASONRY UNITS.
5. CONCRETE INSERTS OR EXPANSION BOLTS ON CONCRETE OR SOLID MASONRY.
6. MACHINE SCREWS, WELDED THREADED STUDS, OR SPRING-TENSION CLAMPS ON STEEL.
7. EXPLOSIVE DEVICES FOR ATTACHING HANGERS TO STRUCTURE SHALL NOT BE PERMITTED.
8. DO NOT WELD CONDUIT, PIPE STRAPS, OR ITEMS OTHER THAN THREADED STUDS TO STEEL STRUCTURES.
9. IN PARTITIONS OF LIGHT STEEL CONSTRUCTION, USE SHEET METAL SCREWS.

SUPPORTING DEVICES:

- A. INSTALL SUPPORTING DEVICES TO FASTEN ELECTRICAL COMPONENTS SECURELY AND PERMANENTLY IN ACCORDANCE WITH NEC.
B. COORDINATE WITH THE BUILDING STRUCTURAL SYSTEM AND WITH OTHER TRADES.
C. UNLESS OTHERWISE INDICATED ON THE DRAWINGS, FASTEN ELECTRICAL ITEMS AND THEIR SUPPORTING HARDWARE SECURELY TO THE STRUCTURE IN ACCORDANCE WITH THE FOLLOWING:
D. ENSURE THAT THE LOAD APPLIED BY ANY FASTENER DOES NOT EXCEED 25 PERCENT OF THE PROOF TEST LOAD.
E. USE VIBRATION AND SHOCK-RESISTANT FASTENERS FOR ATTACHMENTS TO CONCRETE SLABS.

ELECTRICAL IDENTIFICATION:

- A. UPDATE AND PROVIDE TYPED CIRCUIT BREAKER SCHEDULES IN THE MOUNTING BRACKET, INSIDE DOORS OF AC PANEL BOARDS WITH ANY CHANGES MADE TO THE AC SYSTEM.
B. BRANCH CIRCUITS FEEDING AVIATION OBSTRUCTION LIGHTING EQUIPMENT SHALL BE CLEARLY IDENTIFIED AS SUCH AT THE BRANCH CIRCUIT PANELBOARD.

SECTION 26 200 - ELECTRICAL MATERIALS AND EQUIPMENT

CONDUIT:

- A. RIGID GALVANIZED STEEL (RGS) CONDUIT SHALL BE USED FOR EXTERIOR LOCATIONS ABOVE GROUND AND IN UNFINISHED INTERIOR LOCATIONS AND FOR ENCASED RUNS IN CONCRETE. RIGID CONDUIT AND FITTINGS SHALL BE STEEL, COATED WITH ZINC EXTERIOR AND INTERIOR BY THE HOT DIP GALVANIZING PROCESS. CONDUIT SHALL BE PRODUCED TO ANSI SPECIFICATIONS C80.1, FEDERAL SPECIFICATION WW-C-581 AND SHALL BE LISTED WITH THE UNDERWRITERS' LABORATORIES. FITTINGS SHALL BE THREADED - SET SCREW OR COMPRESSION FITTINGS WILL NOT BE ACCEPTABLE. RGS CONDUITS SHALL BE MANUFACTURED BY ALLIED, REPUBLIC OR WHEATLAND.
B. UNDERGROUND CONDUIT IN CONCRETE SHALL BE POLYVINYLCHLORIDE (PVC) SUITABLE FOR DIRECT BURIAL AS APPLICABLE. JOINTS SHALL BE BELLED, AND FLUSH SOLVENT WELDED IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS. CONDUIT SHALL BE CARLON ELECTRICAL PRODUCTS OR APPROVED EQUAL.
C. TRANSITIONS BETWEEN PVC AND RIGID (RGS) SHALL BE MADE WITH PVC COATED METALLIC LONG SWEEP RADIUS ELBOWS.
D. EMT OR RIGID GALVANIZED STEEL CONDUIT MAY BE USED IN FINISHED SPACES CONCEALED IN WALLS AND CEILINGS. EMT SHALL BE MILD STEEL, ELECTRICALLY WELDED, ELECTRO-GALVANIZED OR HOT-DIPPED GALVANIZED AND PRODUCED TO ANSI SPECIFICATION C80.3, FEDERAL SPECIFICATION WW-C-563, AND SHALL BE UL LISTED. EMT SHALL BE MANUFACTURED BY ALLIED, REPUBLIC OR WHEATLAND, OR APPROVED EQUAL. FITTINGS SHALL BE METALLIC COMPRESSION. SET SCREW CONNECTIONS SHALL NOT BE ACCEPTABLE.
E. LIQUID TIGHT FLEXIBLE METALLIC CONDUIT SHALL BE USED FOR FINAL CONNECTION TO EQUIPMENT. FITTINGS SHALL BE METALLIC GLAND TYPE COMPRESSION FITTINGS, MAINTAINING THE INTEGRITY OF CONDUIT SYSTEM. SET SCREW CONNECTIONS SHALL NOT BE ACCEPTABLE. MAXIMUM LENGTH OF FLEXIBLE CONDUIT SHALL NOT EXCEED 6- FEET. LFMC SHALL BE PROTECTED AND SUPPORTED AS REQUIRE BY NEC. MANUFACTURERS OF FLEXIBLE CONDUITS SHALL BE CAROL, ANACONDA METAL HOSE OR UNIVERSAL METAL HOSE, OR APPROVED EQUAL.
F. MINIMUM SIZE CONDUIT SHALL BE 3/4 INCH (21MM).

HUBS AND BOXES:

- A. AT ENTRANCES TO CABINETS OR OTHER EQUIPMENT NOT HAVING INTEGRAL THREADED HUBS PROVIDE METALLIC THREADED HUBS OF THE SIZE AND CONFIGURATION REQUIRED. HUB SHALL INCLUDE LOCKNUT AND NEOPRENE O-RING SEAL. PROVIDE IMPACT RESISTANT 105 DEGREE C PLASTIC BUSHINGS TO PROTECT CABLE INSULATION.
B. CABLE TERMINATION FITTINGS FOR CONDUIT
1. CABLE TERMINATORS FOR RGS CONDUITS SHALL BE TYPE CRC BY O-Z/GEDNEY OR EQUAL.
2. CABLE TERMINATORS FOR LFMC SHALL BE ETCO - CL2075; OR MADE FOR THE PURPOSE PRODUCTS BY ROXTEC.
C. EXTERIOR PULL BOXES AND PULL BOXES IN INTERIOR INDUSTRIAL AREAS SHALL BE PLATED CAST ALLOY, HEAVY DUTY, WEATHERPROOF, DUST PROOF, WITH GASKET, PLATED IRON ALLOY COVER AND STAINLESS STEEL COVER SCREWS, CROUSE-HINDS WAB SERIES OR EQUAL.
D. CONDUIT OUTLET BODIES SHALL BE PLATED CAST ALLOY WITH SIMILAR GASKETED COVERS. OUTLET BODIES SHALL BE OF THE CONFIGURATION AND SIZE SUITABLE FOR THE APPLICATION. PROVIDE CROUSE-HINDS FORM 8 OR EQUAL.
E. MANUFACTURER FOR BOXES AND COVERS SHALL BE HOFFMAN, SQUARE "D", CROUSE-HINDS, COOPER, ADALET, APPLETON, O-Z GEDNEY, RACO, OR APPROVED EQUAL.

SUPPLEMENTAL GROUNDING SYSTEM

- A. FURNISH AND INSTALL A SUPPLEMENTAL GROUNDING SYSTEM AS INDICATED ON THE DRAWINGS. SUPPORT SYSTEM WITH NON-MAGNETIC STAINLESS STEEL CLIPS WITH RUBBER GROMMETS. GROUNDING CONNECTORS SHALL BE TINNED COPPER WIRE, SIZES AS INDICATED ON THE DRAWINGS. PROVIDE STRANDED OR SOLID BARE OR INSULATED CONDUCTORS AS INDICATED.
B. SUPPLEMENTAL GROUNDING SYSTEM: ALL CONNECTIONS TO BE MADE WITH CAD WELDS, EXCEPT AT EQUIPMENT USE LUGS OR OTHER AVAILABLE GROUNDING MEANS AS REQUIRED BY MANUFACTURER; AT GROUND BARS USE TWO HOLE SPADES WITH NO OX.
C. STOLEN GROUND-BARS: IN THE EVENT OF STOLEN GROUND BARS, CONTACT SPRINT CM FOR REPLACEMENT INSTRUCTION USING THREADED ROD KITS.

EXISTING STRUCTURE:

- A. EXISTING EXPOSED WIRING AND ALL EXPOSED OUTLETS, RECEPTACLES, SWITCHES, DEVICES, BOXES, AND OTHER EQUIPMENT THAT ARE NOT TO BE UTILIZED IN THE COMPLETED PROJECT SHALL BE REMOVED OR DE-ENERGIZED AND CAPPED IN THE WALL, CEILING, OR FLOOR SO THAT THEY ARE CONCEALED AND SAFE. WALL, CEILING, OR FLOOR SHALL BE PATCHED TO MATCH THE ADJACENT CONSTRUCTION.

CONDUIT AND CONDUCTOR INSTALLATION:

- A. CONDUITS SHALL BE FASTENED SECURELY IN PLACE WITH APPROVED NON-PERFORATED STRAPS AND HANGERS. EXPLOSIVE DEVICES FOR ATTACHING HANGERS TO STRUCTURE WILL NOT BE PERMITTED. CLOSELY FOLLOW THE LINES OF THE STRUCTURE, MAINTAIN CLOSE PROXIMITY TO THE STRUCTURE AND KEEP CONDUITS IN TIGHT ENVELOPES. CHANGES IN DIRECTION TO ROUTE AROUND OBSTACLES SHALL BE MADE WITH CONDUIT OUTLET BODIES. CONDUIT SHALL BE INSTALLED IN A NEAT AND WORKMANLIKE MANNER, PARALLEL AND PERPENDICULAR TO STRUCTURE WALL AND CEILING LINES. ALL CONDUIT SHALL BE FISHED TO CLEAR OBSTRUCTIONS. ENDS OF CONDUITS SHALL BE TEMPORARILY CAPPED TO PREVENT CONCRETE, PLASTER OR DIRT FROM ENTERING. CONDUITS SHALL BE RIGIDLY CLAMPED TO BOXES BY GALVANIZED MALLEABLE IRON BUSHING ON INSIDE AND GALVANIZED MALLEABLE IRON LOCKNUT ON OUTSIDE AND INSIDE.
B. CONDUCTORS SHALL BE PULLED IN ACCORDANCE WITH ACCEPTED GOOD PRACTICE.




1 INTERNATIONAL BLVD, SUITE 800 MAHWAH, NJ 07495 TEL: (800) 357-7641



SBA COMMUNICATIONS CORP. 134 FLANDERS ROAD, SUITE 125 WESTBOROUGH, MA 01581 TEL: (508) 251-0720 FAX: (508) 251-1755



45 BEECHWOOD DRIVE N. ANDOVER, MA 01845 TEL: (978) 557-5553 FAX: (978) 336-5586



CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN

CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM
1	05/16/14	ISSUED FOR CONSTRUCTION	SF
0	05/05/14	ISSUED FOR CONSTRUCTION	SF


SITE NUMBER: CT33XC545-B

SITE NAME: W. HIGGANUM

SITE ADDRESS: 285 CHAMBERLAIN HILL ROAD HIGGANUM, CT 06441

SHEET TITLE: OUTLINE SPECIFICATIONS (DO MACRO)

SHEET NUMBER: SP-3



CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN

CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM
1	05/16/14	ISSUED FOR CONSTRUCTION	SF
0	05/05/14	ISSUED FOR CONSTRUCTION	SF

SITE NUMBER:
CT33XC545-B

SITE NAME:
W. HIGGANUM


SITE ADDRESS:
285 CHAMBERLAIN HILL ROAD
HIGGANUM, CT 06441

SHEET TITLE

COMPOUND PLAN
(DO MACRO)

SHEET NUMBER

A-1

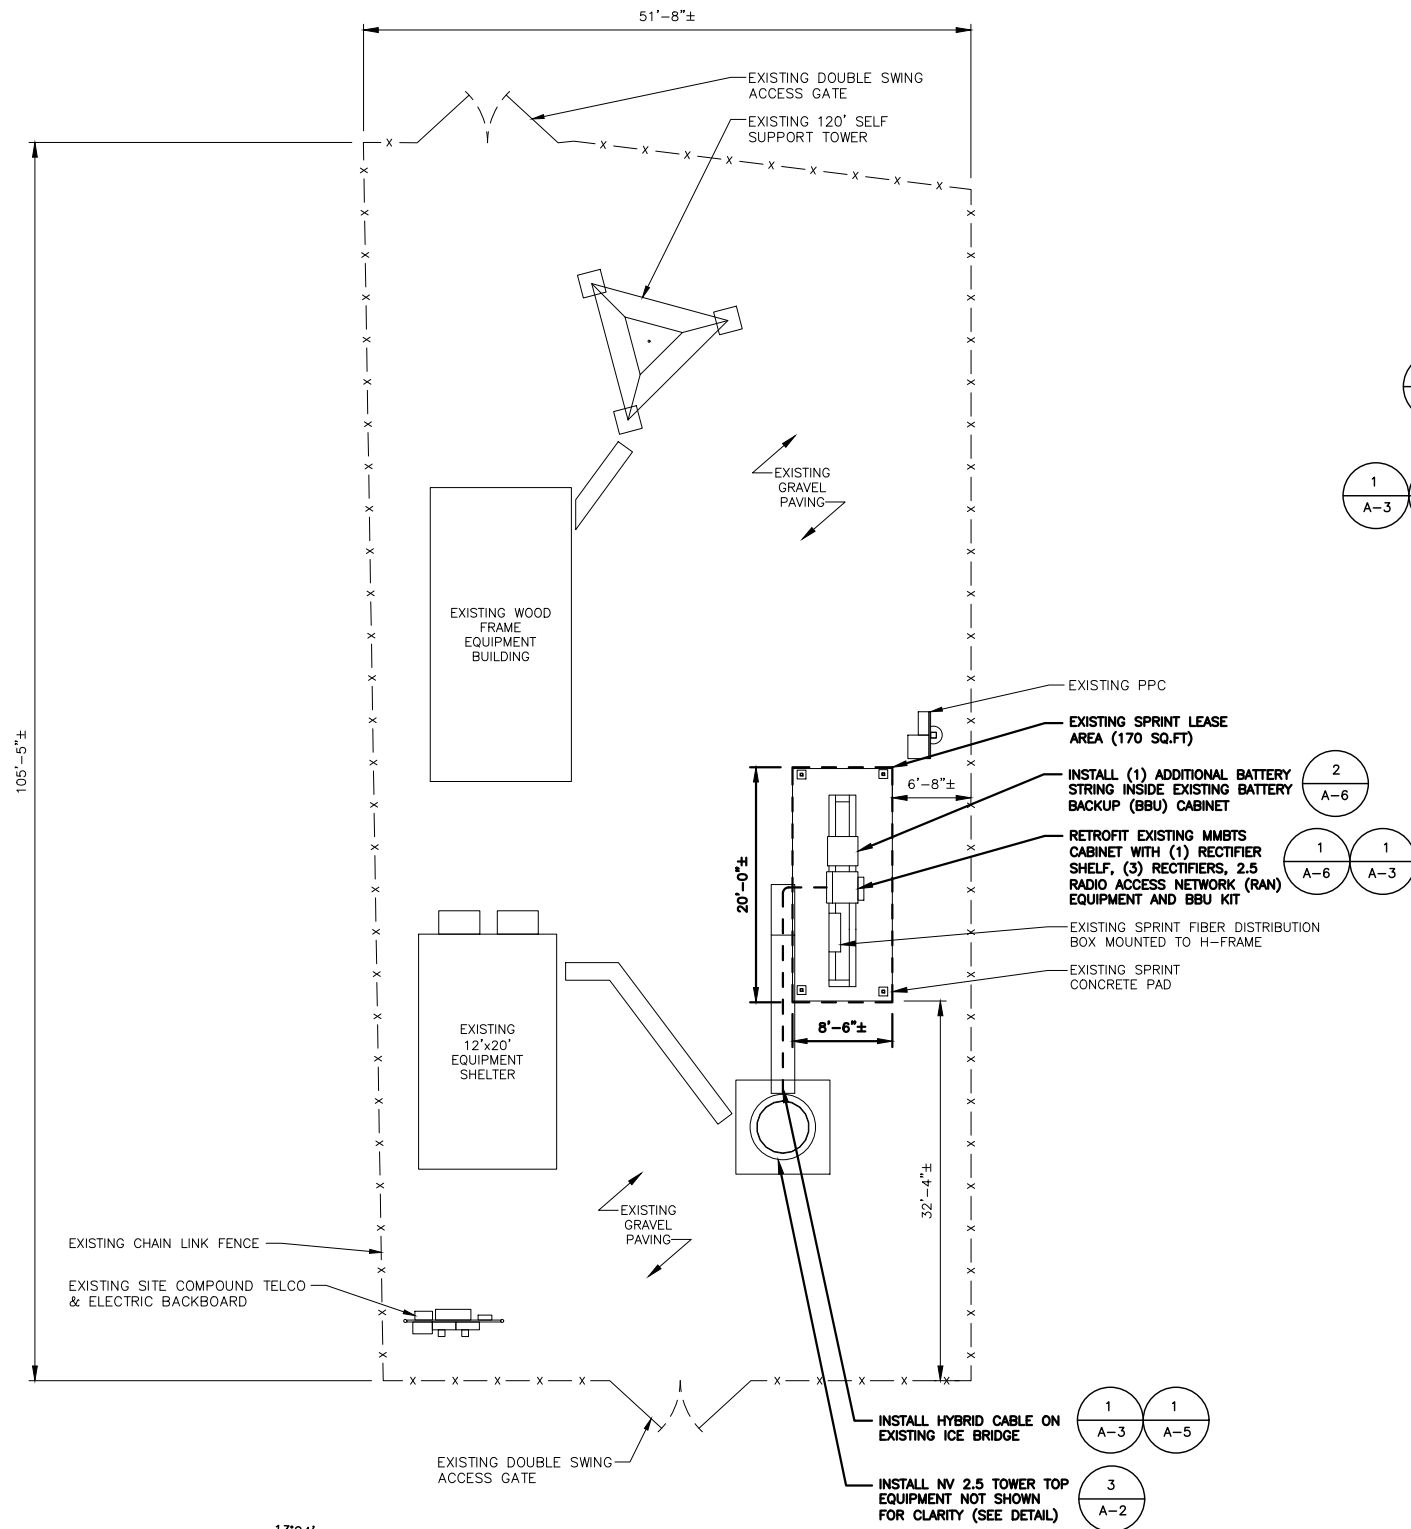


SOURCE: HDG 04-01-14

RAN EQUIPMENT PHOTO DETAIL (2/A-1)
SCALE: N.T.S.



COMPOUND PLAN (1/A-1)
SCALE: 1/8"=1'-0"



NOTE:
 SPRINT RAD CENTER SHOWN IN RED TEXT BASED ON SBA-PROVIDED COLLOCATION APPLICATION, EQUIPMENT DATABASE, AND STRUCTURAL ANALYSIS. THE SBA-PROVIDED ANTENNA RAD CENTER SHALL SUPERSEDE ANY CONFLICTING INFORMATION DERIVED FROM THE SPRINT NV 2.5 RFDS.

SPECIAL CONSTRUCTION NOTE:
 SPRINT TOWER TOP WORK IS CONTINGENT ON THE FOLLOWING:
 * COMPLETION OF A GLOBAL STRUCTURAL STABILITY ANALYSIS.
 * COMPLETION OF AN ANTENNA/RRH MOUNT STRUCTURAL ASSESSMENT.
 * GC SHALL FURNISH, INSTALL AND COMPLETE ALL REQUIRED STRUCTURAL MODIFICATIONS AS INDICATED IN BEFORE-MENTIONED ANALYSIS AND ASSESSMENT.
 * SBA COMMUNICATIONS CORPORATION SHALL PROVIDE WRITTEN ACCEPTANCE/APPROVAL FOR THE COMPLETION OF ALL TOWER/FOUNDATION STRUCTURAL MODIFICATIONS INCLUDING (AS NECESSARY) CONTROLLED CONSTRUCTION INSPECTIONS, SHOP-DRAWING APPROVALS, MATERIALS TEST RESULTS, AND FINAL ENGINEER'S AFFIDAVIT.

NOTE:
 EXISTING AZIMUTHS FROM SPRINT SITE AUDIT DATED 09/14/13

STRUCTURAL NOTES:
 PRIOR TO COMMENCING CONSTRUCTION, GC SHALL REFER TO MOUNT ANALYSIS PROVIDED BY HDG DATED 1/22/2018 TO DETERMINE IF THERE ANY SUPPLEMENTAL OR SPECIAL INSTALLATION REQUIREMENTS, OR RELOCATION ARRANGEMENTS.




1 INTERNATIONAL BLVD, SUITE 800
 MAHWAH, NJ 07495
 TEL: (800) 357-7641




SBA COMMUNICATIONS CORP.
 134 FLANDERS ROAD, SUITE 125
 WESTBOROUGH, MA 01581
 TEL: (508) 251-0720
 FAX: (508) 251-1755



45 BEECHWOOD DRIVE
 N. ANDOVER, MA 01845
 TEL: (978) 557-5553
 FAX: (978) 336-5586



CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN

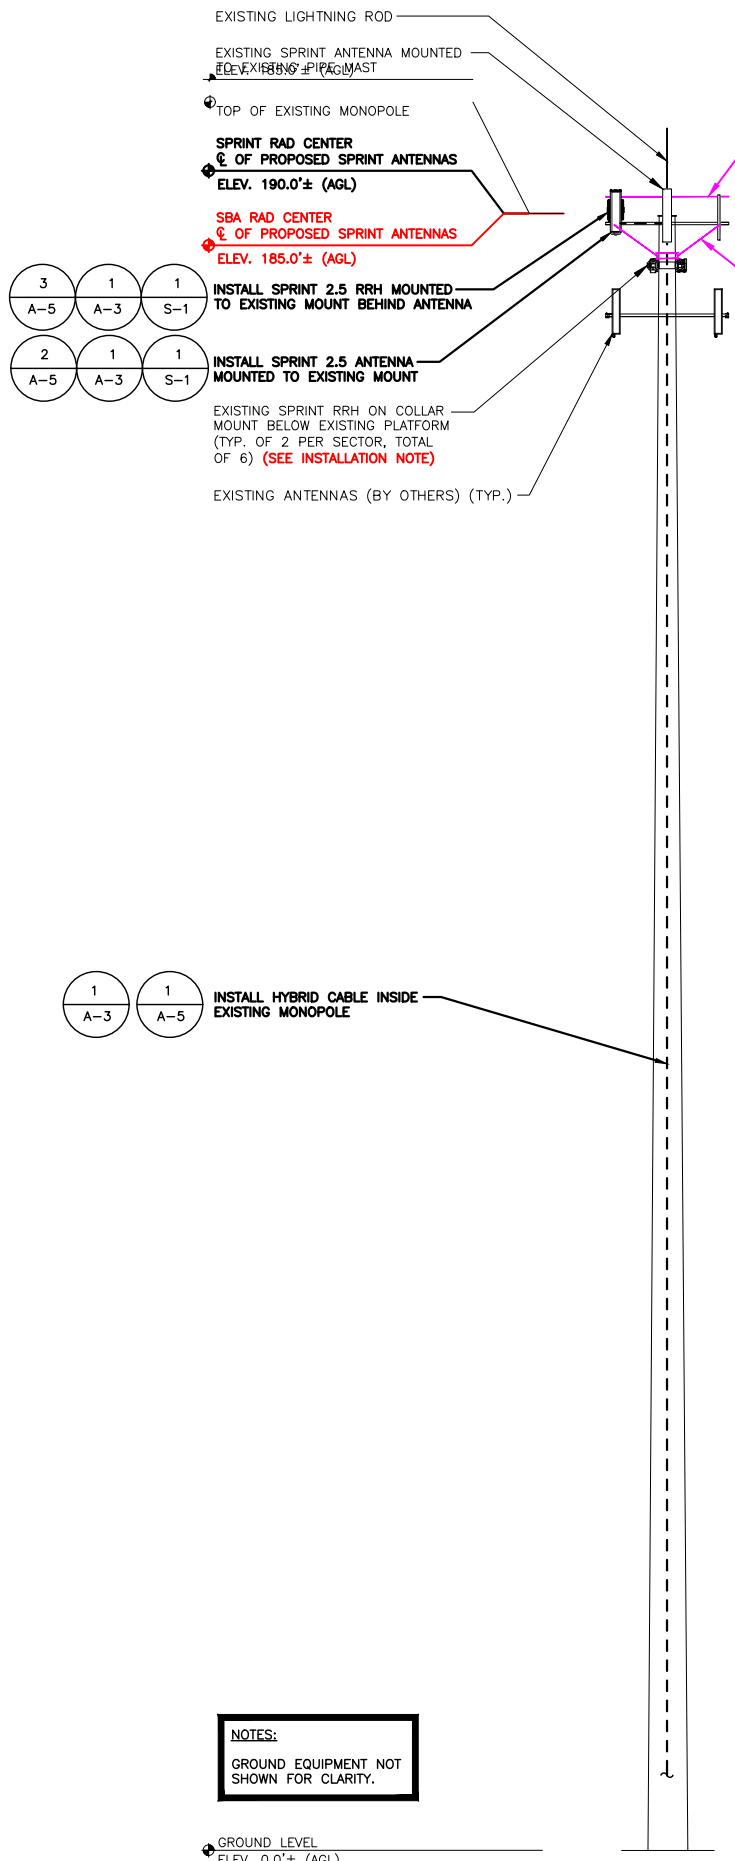


FURNISH AND INSTALL NEW UPPER HANDRAIL KIT (SITEPRO1 PART # HRK14 OR APPROVED EQUAL) (CONTRACTOR TO VERIFY PLATFORM FACE WIDTH PRIOR TO ORDERING) (ALL S-1)

FURNISH AND INSTALL NEW PLATFORM REINFORCEMENT KIT (SITEPRO1 PART # PRK-1245L OR APPROVED EQUAL) (BELOW EXISTING PLATFORM) (TOTAL OF 1) (SEE INSTALLATION NOTE) (ALL S-1)



EXISTING PARTIAL ELEVATION PHOTO DETAIL
 SCALE: N.T.S.

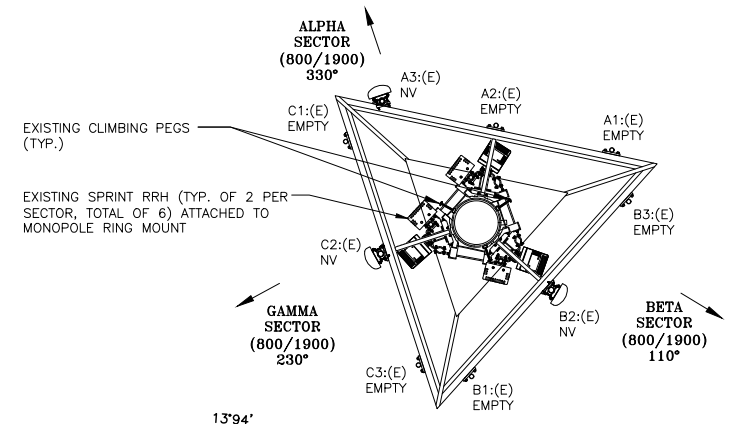


EXISTING ANTENNA PLAN 2
 SCALE: N.T.S.

ANTENNA STATUS LEGEND:
 EMPTY - EMPTY PIPE
 (E) - EXISTING
 (P) - INSTALL
 NV - SPRINT ANTENNA MODEL #APXVSP18-C-A20
 2.5 - SPRINT ANTENNA

SPECIAL WORK NOTE:
 JUMPERS FROM 2.5 RRH TO 2.5 ANTENNA CAN NOT EXCEED 15'. NOTIFY SPRINT CONSTRUCTION MANAGER OF ANY DISCREPANCY.

NOTES:
 1) VERIFY PROPOSED AZIMUTHS WITH RF ENGINEER PRIOR TO INSTALLATION.

1 A-3, 1 A-5: INSTALL HYBRID CABLE INSIDE EXISTING MONOPOLE

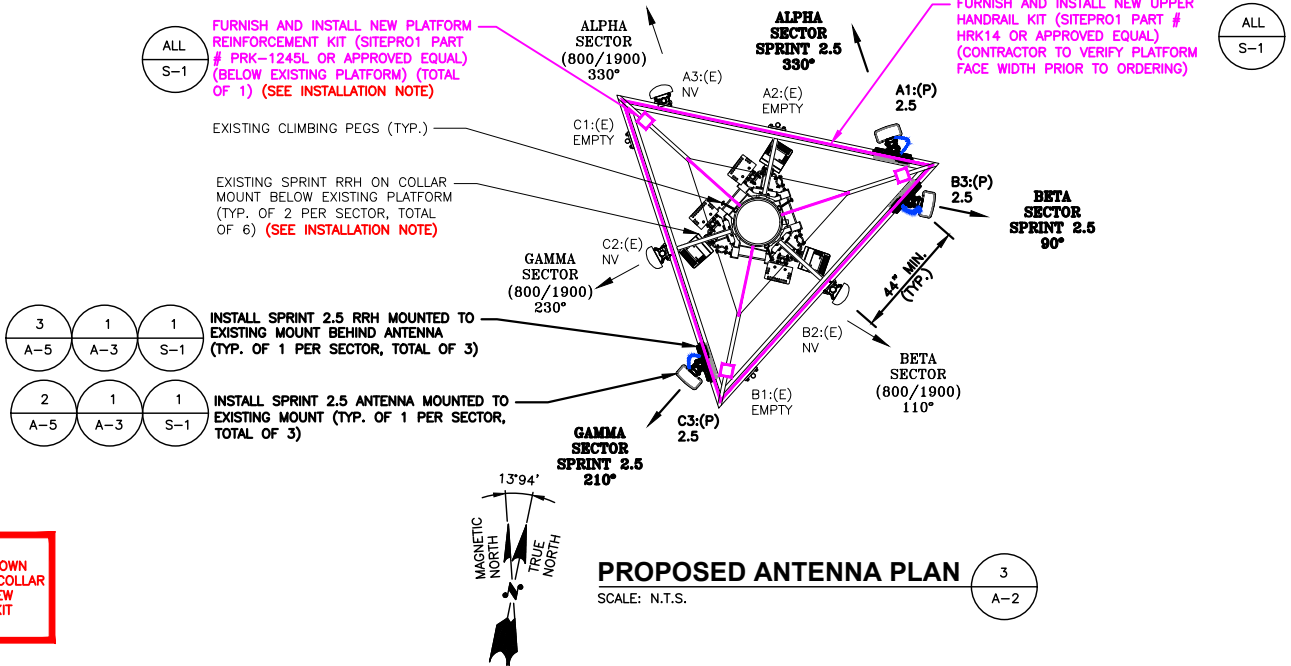


PROPOSED ANTENNA PLAN 3
 SCALE: N.T.S.

INSTALLATION NOTE:
 CONTRACTOR SHALL SLIDE DOWN AND ROTATE EXISTING RRH COLLAR MOUNT TO ACCOMMODATE NEW PLATFORM REINFORCEMENT KIT INSTALLATION AS NECESSARY

NOTES:
 GROUND EQUIPMENT NOT SHOWN FOR CLARITY.

ELEVATION 1 A-2
 SCALE: 3/32"=1'-0"



CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM
1	05/16/14	ISSUED FOR CONSTRUCTION	SF
0	05/05/14	ISSUED FOR CONSTRUCTION	SF

SITE NUMBER:
 CT33XC545-B

SITE NAME:
 W. HIGGANUM

SITE ADDRESS:
 285 CHAMBERLAIN HILL ROAD
 HIGGANUM, CT 06441

SHEET TITLE
 ELEVATION AND ANTENNA PLANS (DO MACRO)

SHEET NUMBER
 A-2



RFDS Sheet

(by SBA Network Services 4/8/14. NOTE: General Contractor/Tower Crew shall verify that the latest RFDS is used for equipment installation.)

General Site Information

Site ID	CT33XC545	Equipment Vendor	ALU
Market	Northern Connecticut	Latitude	41.501860
Region	East	Longitude	-72.619279
MLA	SBA	LL SITE ID	CT04169-A
Structure Type	OTHER		
BTS Type	Outdoor Macro		
Solution ID	Not Available	Siterra SR Equipment Type	Outdoor Macro
		Equipment Vendor	ALU
		Incremental Power Draw Needed by Added Equipment	

Base Equipment

BBU Kit	ALU BBU Kit	Top Hat	None
BBU Kit Qty	1	Top Hat Qty	N/A
Growth Cabinet	None	Top Hat Dimensions (Inches)	N/A
Growth Cabinet Qty	N/A	Top Hat Weight (Lbs.)	N/A
Growth Cabinet Dimensions (Inches)	N/A		
Growth Cabinet Weight (Lbs.)	N/A		

RF Path Information

RRH	TD-RRH8x20-25		
RRH Qty	3		
RRH Dimensions (Inches)	26.1" x 18.6" x 6.7"		
RRH Weight (Lbs.)	70.0		
RRH Mount Weight (Lbs.)	10		
Power and Fiber Cable	ALU Hybrid Cable		
Cable Qty	1		
Weight per Foot (Lbs.)	0.992		
Diameter (Inches)	1.250		
Hybrid Cable Length (Feet) (** A&E 250)	228	(Estimated by Sprint as Antenna CL plus 20%: DO NOT BOM using this length.)	
Coax Jumper	Coax Jumper. Mfg TBD.		
Coax Jumper Qty	27		
Coax Jumper Length (Feet) (** A&E 5)	8		
Coax Jumper Weight (Lbs.)	1.7		
Coax Jumper Diameter (Inches)	0.5		
AISG Cable	Commscope ATCB-B01-006		
AISG Cable Qty	3		
AISG Diameter (Inches)	0.315		
AISG Cable Length (Feet) (** A&E 5)	8		
Weight of Entire AISG Cable (Lbs.)	1.3		

Antenna Sector Information

	Sector 1	Sector 2	Sector 3
Antenna Make/Model	RFS APXV9TM14-ALU-I20	RFS APXV9TM14-ALU-I20	RFS APXV9TM14-ALU-I20
Antenna Qty	1	1	1
Antenna Dimensions (Inches)	56.3 x 12.6 x 6.3	56.3 x 12.6 x 6.3	56.3 x 12.6 x 6.3
Antenna Weight (Lbs.)	55.1	55.1	55.1
Antenna Mounting Kit Weight (Lbs.)	11.5	11.5	11.5
CL Height (Feet) (* SBA 185')	190.0	190.0	190.0
Antenna Azimuth (Degrees)	330	90	210
Antenna Mechanical Downtilt (Degrees)	0	0	0
Antenna Etilt (Degrees)	-2	-2	-2
RF Filter Make/Model	N/A	N/A	N/A

Comments

RFDS generated 4/8/14 by SBA Network Services from Sprint Plan of Record dated 4/2/14.

Comments in Red Text provided by A&E Vendor.

IMPORTANT CONSTRUCTION NOTE: General Contractor/Tower Crew shall verify that the latest RFDS is used for equipment installation.

* Note: Antenna Rad Center based on SBA-Provided Collocation Application, Equipment Database, and Structural Analysis. The SBA-Provided Antenna Rad Center shall supersede any conflicting information derived from the Sprint NV 2.5 Database.

** Note: Sprint CM shall confirm Hybrid Cable Length, Coax Jumper Length and AISG Cable Length before preparing BOM. A&E Recommended Hybrid Cable Length based on NV 2.5 Equipment Audit plus 20 Feet for (2) 10-foot coils at each end of the fiber trunk.

SPRINT CONSTRUCTION STANDARDS:

GENERAL CONTRACTOR SHALL ADHERE TO THE FOLLOWING SPRINT CONSTRUCTION STANDARDS.

- CONSTRUCTION STANDARDS: INTEGRATED CONSTRUCTION STANDARDS FOR WIRELESS SITES - (CURRENT VERSION), INCLUDING EXHIBITS A-M.
- CONSTRUCTION SPECIFICATIONS: CONSTRUCTION STANDARDS EXHIBIT A - STANDARD CONSTRUCTION SPECIFICATIONS FOR WIRELESS SITES (CURRENT VERSION).
- GROUNDING STANDARDS: EXTERIOR GROUNDING SYSTEM DESIGN. GROUNDING STANDARDS (SUPPLEMENT): ANTI-THEFT UPDATE TO SPRINT GROUNDING 082412 AND SPRINT ENGINEERING LETTER EL-0504 DATED 04.20.12.
- WEATHER PROOFING STANDARDS: EXCERPT FROM CONSTRUCTION STANDARDS EXHIBIT A, SECTION 3.6 WEATHERPROOFING CONNECTORS AND GROUND KITS.
- COLOR CODING: SPRINT NEXTEL ANT AND LINE COLOR CODING PER SPRINT TS-0200 CURRENT VERSION.
- GENERAL CONTRACTOR TO FIELD VERIFY AZIMUTH AND CL HEIGHT AND MECHANICAL DOWNTILT. IF DIFFERENT THAN CALLED OUT IN RFDS, HALT ANTENNA WORK FOR ONE HOUR, CALL SPRINT RF ENGINEER (OR MANAGER IF RF ENGINEER DOES NOT ANSWER, BUT STILL LEAVE A MESSAGE TO RF ENGINEER) USING SPRINT-PROVIDED CONTACT INFORMATION FOR FURTHER INSTRUCTIONS. IF SPRINT DOES NOT RESPOND WITHIN ONE HOUR, PLACE 2.5G ANTENNA AT SAME CL HEIGHT AS 1.9G ANTENNA AND EMAIL CORRECT CL HEIGHT AND AZIMUTH TO SPRINT RF ENGINEER. UPDATE AS-BUILD DRAWING WITH CORRECT CL HEIGHT. ALSO EMAIL CORRECT 1900 MHZ AND 800 MHZ ANTENNA CL HEIGHT, AZIMUTH AND MECHANICAL DOWNTILT TO RF ENGINEER.
- AISG TESTS TO VERIFY OPERATION IS TO BE PERFORMED AFTER FINAL INSTALLATION OF ANTENNAS AND AISG CABLES HAVE BEEN CONNECTED. VERIFY OPERATION OF ALL EXISTING SPRINT AISG EQUIPMENT INCLUDING 800MHZ, 1.9GHZ AND 2.5G. TEST INCLUDE COMPLETE DOWNTILT, AZIMUTH (IF APPLICABLE) AND BEAMWIDTH SWINGS (IF APPLICABLE). DOCUMENT AISG TEST RESULTS IN COAX SWEEP TEST SPREADSHEET.
- GENERAL CONTRACTOR MUST INSURE THAT NO OBJECT IS LOCATED IN FRONT OF ANTENNA. THIS MEANS NO OBJECT IS TO BE LOCATED 45 DEGREES LEFT AND RIGHT OF FRONT OF ANTENNA OR 7 DEGREES UP AND DOWN FROM CENTER OF ANTENNA. IF THIS IS NOT POSSIBLE, CONTACT RF ENGINEER FOR FURTHER INSTRUCTION. IN ADDITION, 2.5G ANTENNA IS NOT TO BE PLACED IN FRONT OF ANY OTHER ANTENNA USING THE SAME 45 DEGREE RULE. THIS INCLUDES SPRINT AND NON-SPRINT ANTENNAS.
- GENERAL CONTRACTOR IS REQUIRED TO USE A DIGITAL ALIGNMENT TOOL TO SET AZIMUTH, ROLL AND DOWNTILT. AZIMUTH ACCURACY IS TO BE WITHIN 1 DEGREES. DOWNTILT AND ROLL (LEFT TO RIGHT TILT) IS TO BE WITHIN 0.1 DEGREES. IF FOR SOME REASON THIS ACCURACY CANNOT BE ACHIEVED, UPDATE AS-BUILT DRAWINGS AND EMAIL SPRINT RF ENGINEER WITH AS-BUILT SETTINGS. USE 3Z RF ALIGNMENT TOOL OR EQUIVALENT TOOL. [HTTP://WWW.3ZTELECOM.COM/ANTENNA-ALIGNMENT-TOOL/](http://www.3ztelecom.com/antenna-alignment-tool/).




1 INTERNATIONAL BLVD, SUITE 800
MAHWAH, NJ 07495
TEL: (800) 357-7641



SBA COMMUNICATIONS CORP.
134 FLANDERS ROAD, SUITE 125
WESTBOROUGH, MA 01581
TEL: (508) 251-0720
FAX: (508) 251-1755



45 BEECHWOOD DRIVE
N. ANDOVER, MA 01845
TEL: (978) 557-5553
FAX: (978) 336-5586



CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN

CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM
1	05/16/14	ISSUED FOR CONSTRUCTION	SF
0	05/05/14	ISSUED FOR CONSTRUCTION	SF

SITE NUMBER:
CT33XC545-B

SITE NAME:
W. HIGGANUM

SITE ADDRESS:
285 CHAMBERLAIN HILL ROAD
HIGGANUM, CT 06441

SHEET TITLE

RF DATA SHEET
(DO MACRO)


SHEET NUMBER

A-3




RF DATA SHEET

SCALE: N.T.S.


1
A-3

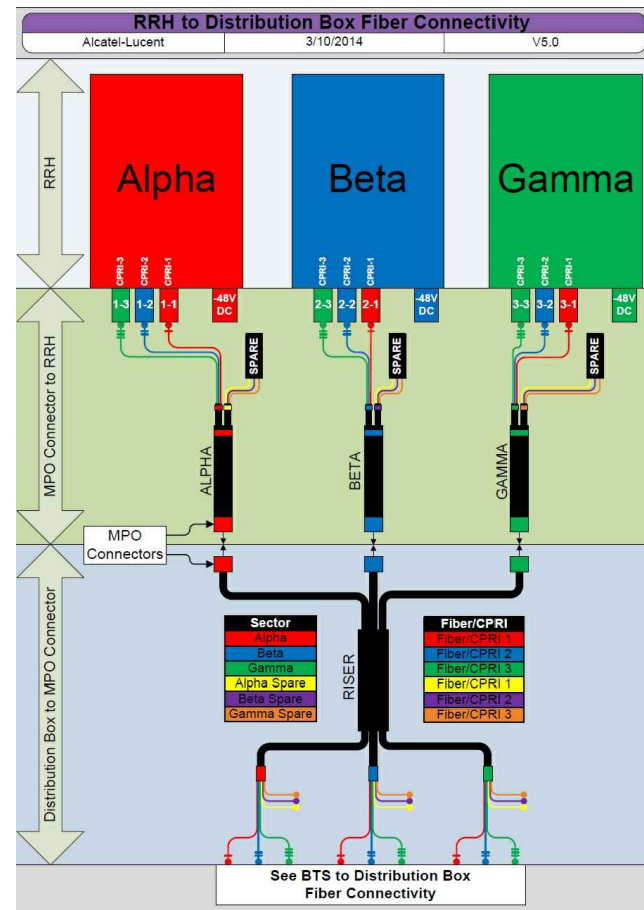

CABLE COLOR CODING DIAGRAM
SCALE: N.T.S.

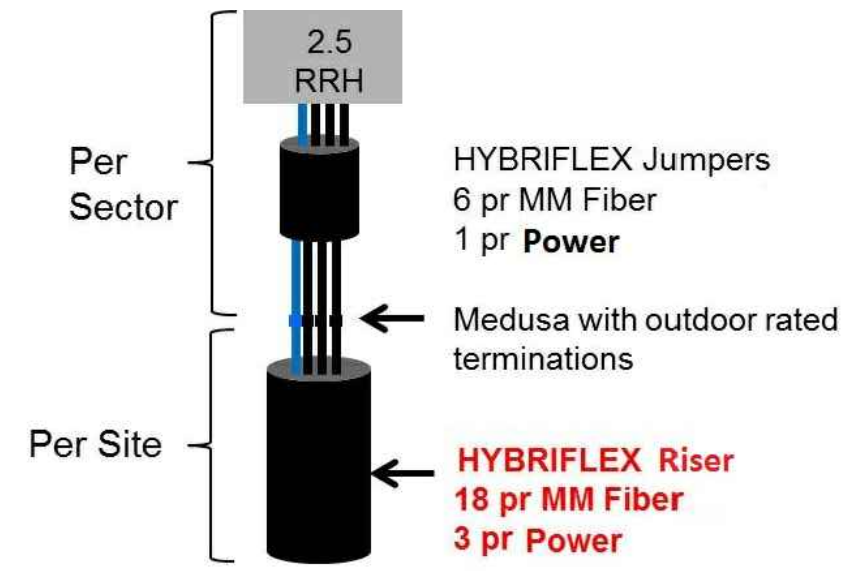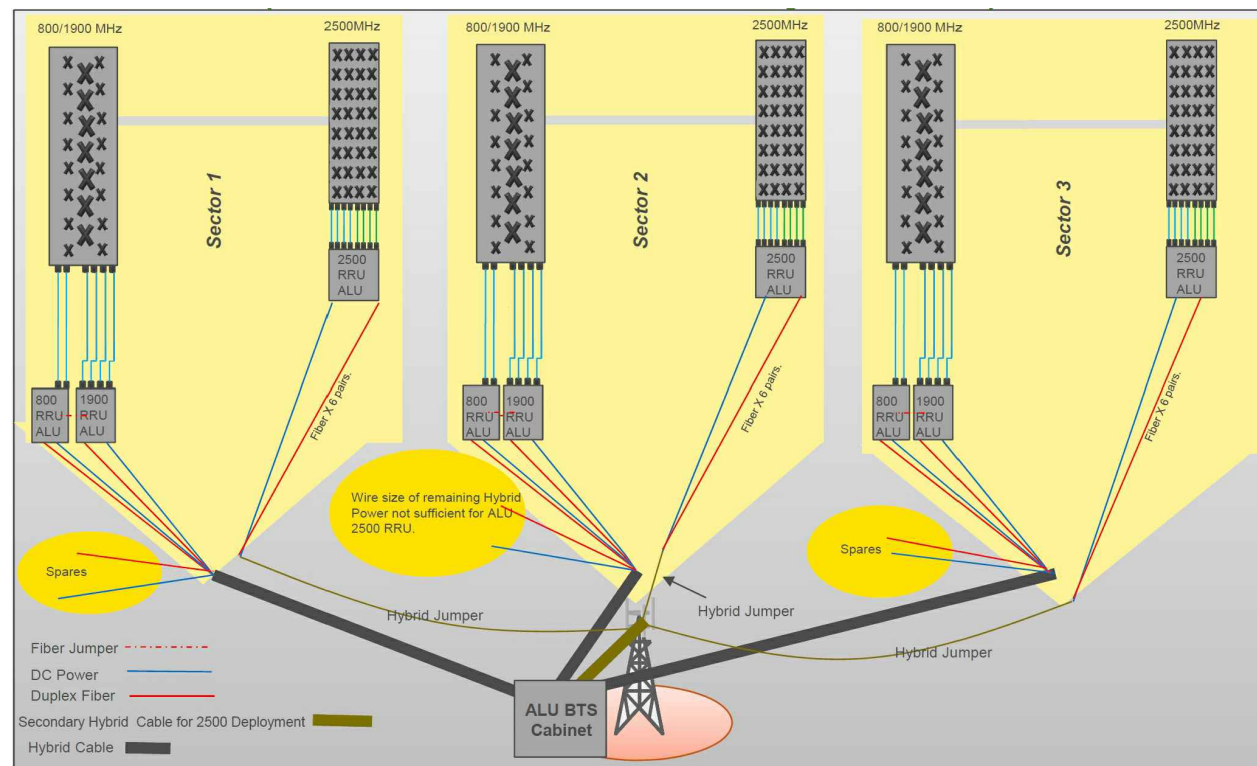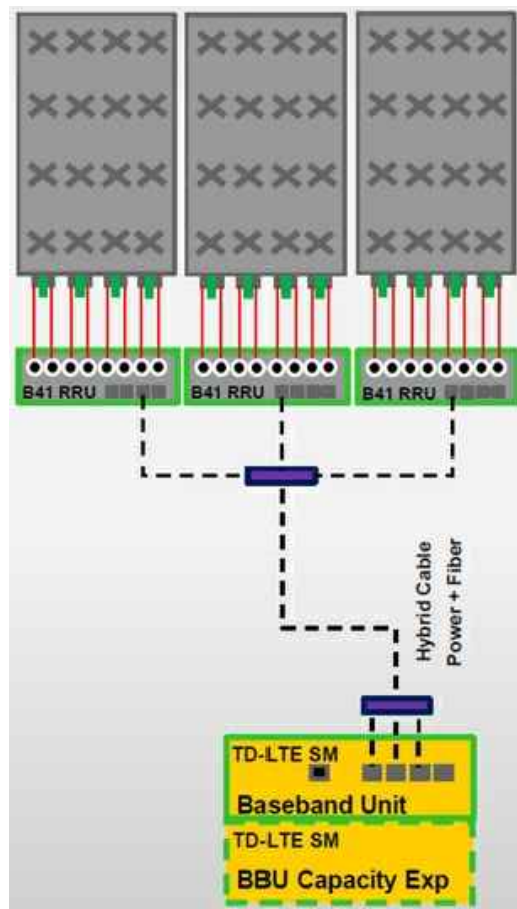

NOTE:
GENERAL CONTRACTOR SHALL VERIFY THAT THE LATEST RF DATA SHEET IS USED FOR EQUIPMENT INSTALLATION.



CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM
1	05/16/14	ISSUED FOR CONSTRUCTION	SF
0	05/05/14	ISSUED FOR CONSTRUCTION	SF

SITE NUMBER:
CT33XC545-B

SITE NAME:
W. HIGGANUM

SITE ADDRESS:
285 CHAMBERLAIN HILL ROAD
HIGGANUM, CT 06441

SHEET TITLE
RAN WIRING DIAGRAM
(DO MACRO)

SHEET NUMBER
A-4

HYBRID CABLE DC CONDUCTOR SIZE GUIDELINE				
CABLE	LENGTH	DC CONDUCTOR	CABLE DIAMETER	
FIBER ONLY	VARIES	USE NV HYBRIFLEX	5/8"	
HYBRIFLEX	<200'	8 AWG	1-1/4"	
HYBRIFLEX	225-300'	6 AWG	1-1/4"	
HYBRIFLEX	325-375'	4 AWG	1-1/4"	

RFS HYBRIFLEX RISER CABLE SCHEDULE

Power	Hybrid cable	Length
Fiber Only (Existing DC Power)	MN: HB058-M12-050F 12x multi-mode fiber pairs, Top: Outdoor protected connectors, Bottom: LC Connectors, 5/8 cable, 50 ft	50 ft
	MN: HB058-M12-075F	75 ft
	MN: HB058-M12-100F	100 ft
	MN: HB058-M12-125F	125 ft
	MN: HB058-M12-150F	150 ft
	MN: HB058-M12-175F	175 ft
8 AWG Power	MN: HB114-08U3M12-050F 3x 8 AWG power pairs, 12x multi-mode fiber pairs, Outdoor rated connectors & LC Connectors, 1 1/4 cable, 50 ft	50 ft
	MN: HB114-08U3M12-075F	75 ft
	MN: HB114-08U3M12-100F	100 ft
	MN: HB114-08U3M12-125F	125 ft
	MN: HB114-08U3M12-150F	150 ft
	MN: HB114-08U3M12-175F	175 ft
6 AWG Power	MN: HB114-13U3M12-225F 3x 6 AWG power pair, 12x multi-mode fiber pairs, Outdoor rated connectors & LC Connectors, 1 1/4 cable, 225 ft	225 ft
	MN: HB114-13U3M12-250F	250 ft
	MN: HB114-13U3M12-275F	275 ft
	MN: HB114-13U3M12-300F	300 ft
4 AWG Power	MN: HB114-21U3M12-325F 3x 4 AWG power pair, 12x multi-mode fiber pairs, Outdoor rated connectors & LC Connectors, 1 1/4 cable, 325 ft	325 ft
	MN: HB114-21U3M12-350F	350 ft
	MN: HB114-21U3M12-375F	375 ft


RFS HYBRIFLEX JUMPER CABLE SCHEDULE

Power	Hybrid Jumper cable	Length
Fiber Only	MN: HBF012-M3-5F1 5 ft, 3x multi-mode fiber pairs, Outdoor & LC connectors, 1/2 cable	5 ft
	MN: HBF012-M3-10F1	10 ft
	MN: HBF012-M3-15F1	15 ft
8 AWG Power	MN: HBF058-08U1M3-5F1 5 ft, 1x 8 AWG power pair, 3x multi-mode fiber pairs, Outdoor & LC Connectors, 5/8 cable	5 ft
	MN: HBF058-08U1M3-10F1	10 ft
	MN: HBF058-08U1M3-15F1	15 ft
6 AWG Power	MN: HBF058-13U1M3-5F1 5 ft, 1x 6 AWG power pair, 3x multi-mode fiber pairs, Outdoor & LC Connectors, 5/8 cable	5 ft
	MN: HBF058-13U1M3-10F1	10 ft
	MN: HBF058-13U1M3-15F1	15 ft
4 AWG Power	MN: HBF078-21U1M3-5F1 5 ft, 1x 4 AWG power pair, 3x multi-mode fiber pairs, Outdoor & LC Connectors, 7/8 cable	5 ft
	MN: HBF078-21U1M3-10F1	10 ft
	MN: HBF078-21U1M3-15F1	15 ft


* NOTE: SPRINT CM TO CONFIRM HYBRID RISER CABLE AND HYBRID JUMPER CABLE MODEL NUMBERS BEFORE PREPARING BOM.

2.5 HYBRID CABLE X-SECTION AND DATA


1
A-5

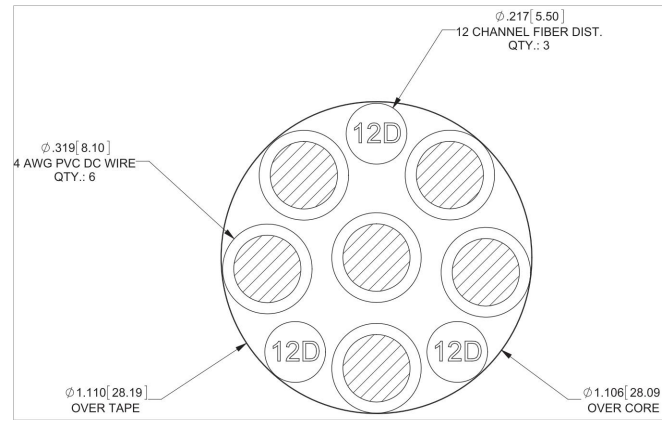

4 AWG

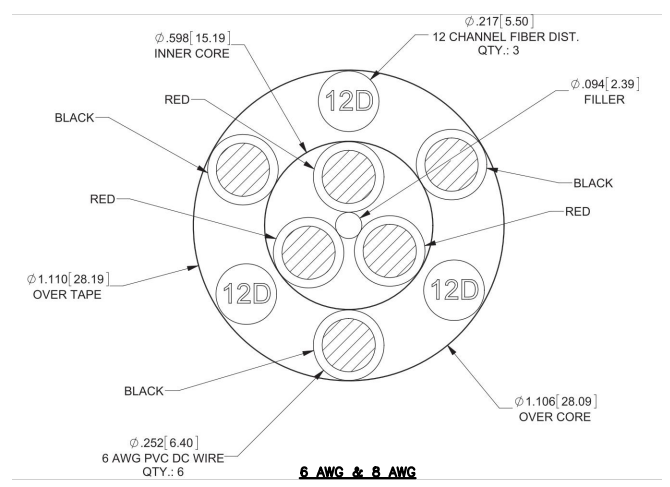


6 AWG & 8 AWG

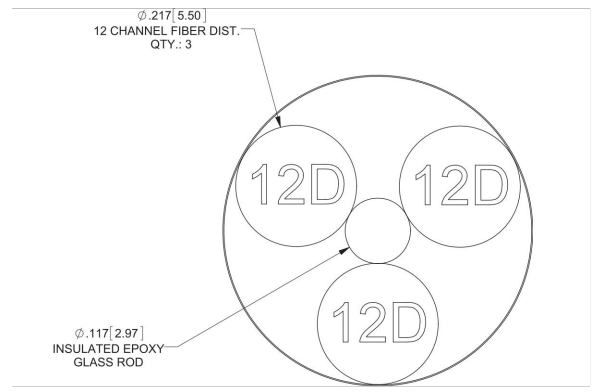


FIBER ONLY

MANUF: RFS
MODEL: APXV9TM14-ALU-120
LENGTH: 56.3
WIDTH: 12.6
DEPTH: 6.3
WEIGHT: 55.1 LBS
AREA: 4.9 SF

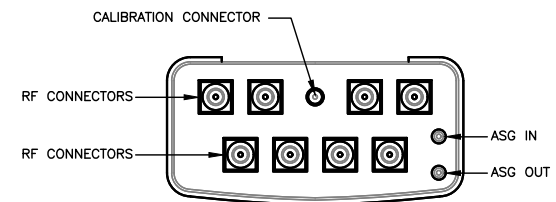

PLAN VIEW

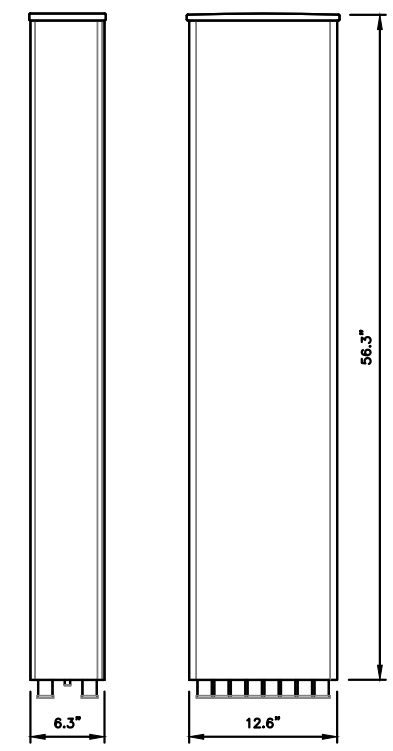


2.5 ANTENNA SPECIFICATIONS

SCALE: N.T.S.


2
A-5

MANUF: ALCATEL-LUCENT
MODEL: TD-RRH8x20-25
LENGTH: 26.1
WIDTH: 18.6
DEPTH: 6.7
WEIGHT: 70 LBS
AREA: 3.5 SF

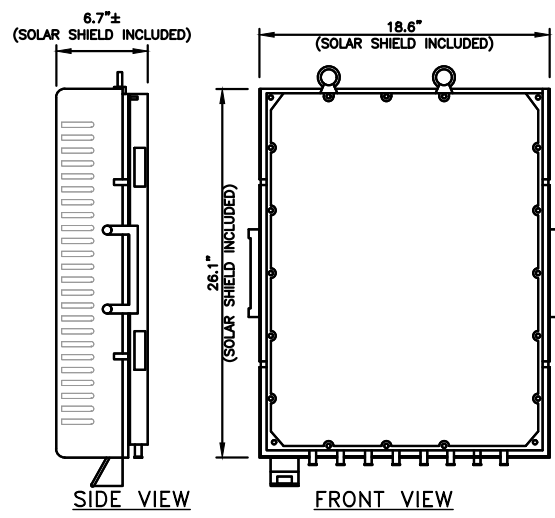

SIDE VIEW

FRONT VIEW



PLAN VIEW

2.5 RRH'S

SCALE: N.T.S.

3
A-5




1 INTERNATIONAL BLVD, SUITE 800
MAHWAH, NJ 07495
TEL: (800) 357-7641



SBA COMMUNICATIONS CORP.
134 FLANDERS ROAD, SUITE 125
WESTBOROUGH, MA 01581
TEL: (508) 251-0720
FAX: (508) 251-1755



45 BEECHWOOD DRIVE
N. ANDOVER, MA 01845
TEL: (978) 557-5553
FAX: (978) 336-5586



CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMP AND SIGNED SUBMITTAL DATE LISTED HEREIN

CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM
1	05/16/14	ISSUED FOR CONSTRUCTION	SF
0	05/05/14	ISSUED FOR CONSTRUCTION	SF

SITE NUMBER:
CT33XC545-B

SITE NAME:
W. HIGGANUM



SITE ADDRESS:
285 CHAMBERLAIN HILL ROAD
HIGGANUM, CT 06441

SHEET TITLE

EQUIPMENT
DETAILS
(DO MACRO)

SHEET NUMBER

A-5

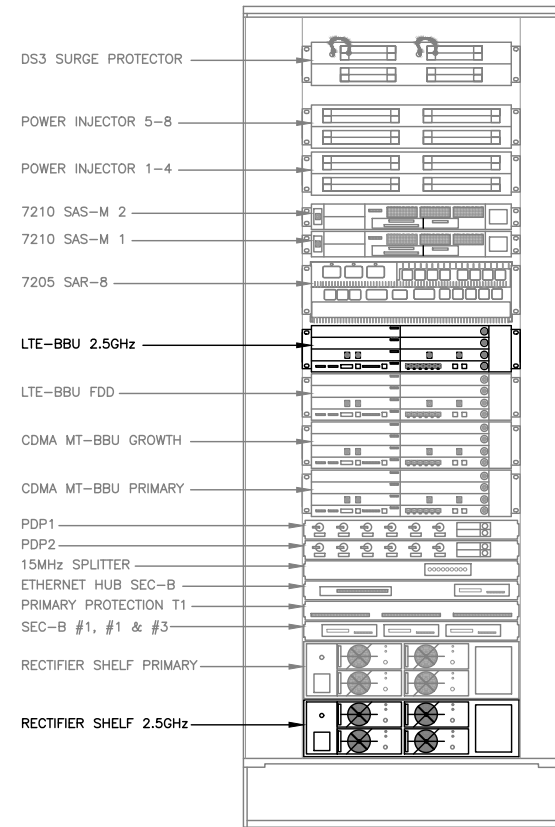

FRONT VIEW

EXISTING MMBTS OUTDOOR CABINET WITH 2.5 EQUIPMENT

SCALE: N.T.S.

1
A-6

SUFFICIENT SPACE IN EXISTING BBU. INSTALL (1) ADDITIONAL BATTERY STRING IN EXISTING BBU CABINET



SOURCE: SPRINT SITE AUDIT 09-10-13

FRONT VIEW

EXISTING 2.5 POWER BBU CABINET

SCALE: N.T.S.

2
A-6

CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM
1	05/16/14	ISSUED FOR CONSTRUCTION	SF
0	05/05/14	ISSUED FOR CONSTRUCTION	SF

SITE NUMBER:
CT33XC545-B

SITE NAME:
W. HIGGANUM

SITE ADDRESS:
285 CHAMBERLAIN HILL ROAD
HIGGANUM, CT 06441

SHEET TITLE

EQUIPMENT
DETAILS
(DO MACRO)

SHEET NUMBER

A-6

STRUCTURAL NOTES:

- DESIGN REQUIREMENTS ARE PER STATE BUILDING CODE AND APPLICABLE SUPPLEMENTS, INTERNATIONAL BUILDING CODE, EIA/TIA-222-G STRUCTURAL STANDARDS FOR STEEL ANTENNA, TOWERS AND ANTENNA SUPPORTING STRUCTURES.
- CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND CONDITIONS IN THE FIELD PRIOR TO FABRICATION AND ERECTION OF ANY MATERIAL. ANY UNUSUAL CONDITIONS SHALL BE REPORTED TO THE ATTENTION OF THE CONSTRUCTION MANAGER AND ENGINEER OF RECORD.
- DESIGN AND CONSTRUCTION OF STRUCTURAL STEEL SHALL CONFORM TO THE AMERICAN INSTITUTE OF STEEL CONSTRUCTION "SPECIFICATION FOR THE DESIGN, FABRICATION AND ERECTION OF STRUCTURAL STEEL FOR BUILDINGS".
- STRUCTURAL STEEL SHALL CONFORM TO ASTM A992 (Fy=50 ksi), MISCELLANEOUS STEEL SHALL CONFORM TO ASTM A36 UNLESS OTHERWISE INDICATED.
- STEEL PIPE SHALL CONFORM TO ASTM A500 "COLD-FORMED WELDED & SEAMLESS CARBON STEEL STRUCTURAL TUBING", GRADE B, OR ASTM A53 PIPE STEEL BLACK AND HOT-DIPPED ZINC-COATED WELDED AND SEAMLESS TYPE E OR S, GRADE B. PIPE SIZES INDICATED ARE NOMINAL. ACTUAL OUTSIDE DIAMETER IS LARGER.
- STRUCTURAL CONNECTION BOLTS SHALL BE HIGH STRENGTH BOLTS (BEARING TYPE) AND CONFORM TO ASTM A325 TYPE-X "HIGH STRENGTH BOLTS FOR STRUCTURAL JOINTS, INCLUDING SUITABLE NUTS AND PLAIN HARDENED WASHERS". ALL BOLTS SHALL BE 3/4" DIA UON.
- ALL STEEL MATERIALS SHALL BE GALVANIZED AFTER FABRICATION IN ACCORDANCE WITH ASTM A123 "ZINC (HOT-DIP GALVANIZED) COATINGS ON IRON AND STEEL PRODUCTS", UNLESS OTHERWISE NOTED.
- ALL BOLTS, ANCHORS AND MISCELLANEOUS HARDWARE SHALL BE GALVANIZED IN ACCORDANCE WITH ASTM A153 "ZINC-COATING (HOT-DIP) ON IRON AND STEEL HARDWARE", UNLESS OTHERWISE NOTED.
- FIELD WELDS, DRILL HOLES, SAW CUTS AND ALL DAMAGED GALVANIZED SURFACES SHALL BE REPAIRED WITH AN ORGANIC ZINC REPAIR PAINT COMPLYING WITH REQUIREMENTS OF ASTM A780. GALVANIZING REPAIR PAINT SHALL HAVE 65 PERCENT ZINC BY WEIGHT, ZIRP BY DUNCAN GALVANIZING, GALVA BRIGHT PREMIUM BY CROWN OR EQUAL. THICKNESS OF APPLIED GALVANIZING REPAIR PAINT SHALL BE NOT NOT LESS THAN 4 COATS (ALLOW TIME TO DRY BETWEEN COATS) WITH A RESULTING COATING THICKNESS REQUIRED BY ASTM A123 OR A153 AS APPLICABLE.
- CONTRACTOR SHALL COMPLY WITH AWS CODE FOR PROCEDURES, APPEARANCE AND QUALITY OF WELDS, AND FOR METHODS USED IN CORRECTING WELDING. ALL WELDERS AND WELDING PROCESSES SHALL BE QUALIFIED IN ACCORDANCE WITH AWS "STANDARD QUALIFICATION PROCEDURES". ALL WELDING SHALL BE DONE USING E70XX ELECTRODES AND WELDING SHALL CONFORM TO AISC AND D.I. WHERE FILLET WELD SIZES ARE NOT SHOWN, PROVIDE THE MINIMUM SIZE PER TABLE J2.4 IN THE AISC "STEEL CONSTRUCTION MANUAL". 14TH EDITION.
- INCORRECTLY FABRICATED, DAMAGED OR OTHERWISE MISFITTING OR NON-CONFORMING MATERIALS OR CONDITIONS SHALL BE REPORTED TO THE CONSTRUCTION MANAGER PRIOR TO REMEDIAL OR CORRECTIVE ACTION. ANY SUCH ACTION SHALL REQUIRE CONSTRUCTION MANAGER APPROVAL.
- UNISTRUT SHALL BE FORMED STEEL CHANNEL STRUT FRAMING AS MANUFACTURED BY UNISTRUT CORP., WAYNE, MI OR EQUAL. STRUT MEMBERS SHALL BE 1 5/8"x1 5/8"x12GA, UNLESS OTHERWISE NOTED, AND SHALL BE HOT-DIP GALVANIZED AFTER FABRICATION.
- EPOXY ANCHOR ASSEMBLY SHALL CONSIST OF STAINLESS STEEL ANCHOR ROD WITH NUTS & WASHERS. AN INTERNALLY THREADED INSERT, A SCREEN TUBE AND A EPOXY ADHESIVE. THE ANCHORING SYSTEM SHALL BE THE HILTI-HIT HY-70 AND OR HY-200 SYSTEMS (AS SPECIFIED IN DWG.) OR ENGINEERS APPROVED EQUAL.
- EXPANSION BOLTS SHALL CONFORM TO FEDERAL SPECIFICATION FF-S-325, GROUP II, TYPE 4, CLASS I, HILTI KWIK BOLT III OR APPROVED EQUAL. INSTALLATION SHALL BE IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
- LUMBER SHALL COMPLY WITH THE REQUIREMENTS OF THE AMERICAN INSTITUTE OF TIMBER CONSTRUCTION AND THE NATIONAL FOREST PRODUCTS ASSOCIATION'S NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION. ALL LUMBER SHALL BE PRESSURE TREATED AND SHALL BE STRUCTURAL GRADE NO. 2 OR BETTER.
- WHERE ROOF PENETRATIONS ARE REQUIRED, THE CONTRACTOR SHALL CONTACT AND COORDINATE RELATED WORK WITH THE BUILDING OWNER AND THE EXISTING ROOF INSTALLER. WORK SHALL BE PERFORMED IN SUCH A MANNER AS TO NOT VOID THE EXISTING ROOF WARRANTY. ROOF SHALL BE WATERTIGHT.
- ALL FIBERGLASS MEMBERS USED ARE AS MANUFACTURED BY STRONGWELL COMPANY OF BRISTOL, VA 24203. ALL DESIGN CRITERIA FOR THESE MEMBERS IS BASED ON INFORMATION PROVIDED IN THE DESIGN MANUAL. ALL REQUIREMENTS PUBLISHED IN SAID MANUAL MUST BE STRICTLY ADHERED TO.
- NO MATERIALS TO BE ORDERED AND NO WORK TO BE COMPLETED UNTIL SHOP DRAWINGS HAVE BEEN REVIEWED AND APPROVED IN WRITING.
- SUBCONTRACTOR SHALL FIREPROOF ALL STEEL TO PRE-EXISTING CONDITIONS.

SPECIAL INSPECTIONS (REFERENCE IBC CHAPTER 17):

GENERAL: WHERE APPLICATION IS MADE FOR CONSTRUCTION, THE OWNER OR THE REGISTERED DESIGN PROFESSIONAL IN RESPONSIBLE CHARGE ACTING AS THE OWNER'S AGENT SHALL EMPLOY ONE OR MORE APPROVED AGENCIES TO PERFORM INSPECTIONS DURING CONSTRUCTION ON THE TYPES OF WORK LISTED IN THE INSPECTION CHECKLIST ABOVE.

THE REGISTERED DESIGN PROFESSIONAL IN RESPONSIBLE CHARGE AND ENGINEERS OF RECORD INVOLVED IN THE DESIGN OF THE PROJECT ARE PERMITTED TO ACT AS THE APPROVED AGENCY AND THEIR PERSONNEL ARE PERMITTED TO ACT AS THE SPECIAL INSPECTOR FOR THE WORK DESIGNED BY THEM, PROVIDED THOSE PERSONNEL MEET THE QUALIFICATION REQUIREMENTS.

STATEMENT OF SPECIAL INSPECTIONS: THE APPLICANT SHALL SUBMIT A STATEMENT OF SPECIAL INSPECTIONS PREPARED BY THE REGISTERED DESIGN PROFESSIONAL IN RESPONSIBLE CHARGE IN ACCORDANCE WITH SECTION 107.1 AS A CONDITION FOR ISSUANCE. THIS STATEMENT SHALL BE IN ACCORDANCE WITH SECTION 1705.

REPORT REQUIREMENT: SPECIAL INSPECTORS SHALL KEEP RECORDS OF INSPECTIONS. THE SPECIAL INSPECTOR SHALL FURNISH INSPECTION REPORTS TO THE BUILDING OFFICIAL, AND TO THE REGISTERED DESIGN PROFESSIONAL IN RESPONSIBLE CHARGE. REPORTS SHALL INDICATE THAT WORK INSPECTED WAS OR WAS NOT COMPLETED IN CONFORMANCE TO APPROVED CONSTRUCTION DOCUMENTS. DISCREPANCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE CONTRACTOR FOR CORRECTION. IF THEY ARE NOT CORRECTED, THE DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE BUILDING OFFICIAL AND TO THE REGISTERED DESIGN PROFESSIONAL IN RESPONSIBLE CHARGE. A FINAL REPORT DOCUMENTING REQUIRED SPECIAL INSPECTIONS SHALL BE SUBMITTED.

SPECIAL INSPECTION CHECKLIST

BEFORE CONSTRUCTION	
CONSTRUCTION/INSTALLATION INSPECTIONS AND TESTING REQUIRED (COMPLETED BY ENGINEER OF RECORD)	REPORT ITEM
REQUIRED	ENGINEER OF RECORD APPROVED SHOP DRAWINGS ¹
REQUIRED	MATERIAL SPECIFICATIONS REPORT ²
N/A	FABRICATOR NDE INSPECTION
REQUIRED	PACKING SLIPS ³
ADDITIONAL TESTING AND INSPECTIONS:	
DURING CONSTRUCTION	
CONSTRUCTION/INSTALLATION INSPECTIONS AND TESTING REQUIRED (COMPLETED BY ENGINEER OF RECORD)	REPORT ITEM
REQUIRED	STEEL INSPECTIONS
N/A	HIGH STRENGTH BOLT INSPECTIONS
N/A	HIGH WIND ZONE INSPECTIONS ⁴
N/A	FOUNDATION INSPECTIONS
N/A	CONCRETE COMP. STRENGTH, SLUMP TESTS AND PLACEMENT
N/A	POST INSTALLED ANCHOR VERIFICATION ⁵
N/A	GROUT VERIFICATION
N/A	CERTIFIED WELD INSPECTION
N/A	EARTHWORK: LIFT AND DENSITY
N/A	ON SITE COLD GALVANIZING VERIFICATION
N/A	GUY WIRE TENSION REPORT
ADDITIONAL TESTING AND INSPECTIONS:	
AFTER CONSTRUCTION	
CONSTRUCTION/INSTALLATION INSPECTIONS AND TESTING REQUIRED (COMPLETED BY ENGINEER OF RECORD)	REPORT ITEM
REQUIRED	MODIFICATION INSPECTOR REDLINE OR RECORD DRAWINGS ⁶
N/A	POST INSTALLED ANCHOR PULL-OUT TESTING
REQUIRED	PHOTOGRAPHS
ADDITIONAL TESTING AND INSPECTIONS:	

NOTES:

- REQUIRED FOR ANY NEW SHOP FABRICATED FRP OR STEEL.
- PROVIDED BY MANUFACTURER, REQUIRED IF HIGH STRENGTH BOLTS OR STEEL.
- PROVIDED BY GENERAL CONTRACTOR; PROOF OF MATERIALS.
- HIGH WIND ZONE INSPECTION CATB 120MPH OR CAT C,D 110MPH INSPECT FRAMING OF WALLS, ANCHORING, FASTENING SCHEDULE.
- ADHESIVE FOR REBAR AND ANCHORS SHALL HAVE BEEN TESTED IN ACCORDANCE WITH ACI 355.4 AND ICC-ES AC308 FOR CRACKED CONCRETE AND SEISMIC APPLICATIONS. DESIGN ADHESIVE BOND STRENGTH HAS BEEN BASED ON ACI 355.4 TEMPERATURE CATEGORY B WITH INSTALLATIONS INTO DRY HOLES DRILLED USING A CARBIDE BIT INTO CRACKED CONCRETE THAT HAS CURED FOR AT LEAST 21 DAYS. ADHESIVE ANCHORS REQUIRING CERTIFIED INSTALLATIONS SHALL BE INSTALLED BY A CERTIFIED ADHESIVE ANCHOR INSTALLER PER ACI 318-11 D.9.2.2. INSTALLATIONS REQUIRING CERTIFIED INSTALLERS SHALL BE INSPECTED PER ACI 318-11 D.8.2.4.
- AS REQUIRED; FOR ANY FIELD CHANGES TO THE ITEMS IN THIS TABLE.

NOTES:

- ALL CONNECTIONS TO BE SHOP WELDED & FIELD BOLTED USING 3/4" A325-X BOLTS, UNLESS OTHERWISE NOTIFIED.
- SHOP DRAWING ENGINEER REVIEW & APPROVAL REQUIRED BEFORE ORDERING MATERIAL.
- SHOP DRAWING ENGINEER REVIEW & APPROVAL REQUIRED PRIOR TO STEEL FABRICATION.
- VERIFICATION OF EXISTING ROOF CONSTRUCTION IS REQUIRED PRIOR TO THE INSTALLATION OF THE ROOF PLATFORM. ENGINEER OF RECORD IS TO APPROVE EXISTING CONDITIONS IN ORDER TO MOVE FORWARD.
- CENTERLINE OF PROPOSED STEEL PLATFORM SUPPORT COLUMNS TO BE CENTRALLY LOCATED OVER THE EXISTING BUILDING COLUMNS.
- EXISTING BRICK MASONRY COLUMNS/BEARING TO BE REPAIRED/REPLACED AT ALL PROPOSED PLATFORM SUPPORT POINTS. ENGINEER OF RECORD TO REVIEW AND APPROVE.




1 INTERNATIONAL BLVD, SUITE 800
MAHWAH, NJ 07495
TEL: (800) 357-7641



SBA COMMUNICATIONS CORP.
134 FLANDERS ROAD, SUITE 125
WESTBOROUGH, MA 01581
TEL: (508) 251-0720
FAX: (508) 251-1755



45 BEECHWOOD DRIVE
N. ANDOVER, MA 01845
TEL: (978) 557-5553
FAX: (978) 336-5586



CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN

CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS			
REV.	DATE	DESCRIPTION	BY
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM
1	05/16/14	ISSUED FOR CONSTRUCTION	SF
0	05/05/14	ISSUED FOR CONSTRUCTION	SF

SITE NUMBER:
CT33XC545-B


SITE NAME:
W. HIGGANUM

SITE ADDRESS:
285 CHAMBERLAIN HILL ROAD
HIGGANUM, CT 06441

SHEET TITLE
STRUCTURAL NOTES
(DO MACRO)

SHEET NUMBER

SN-1

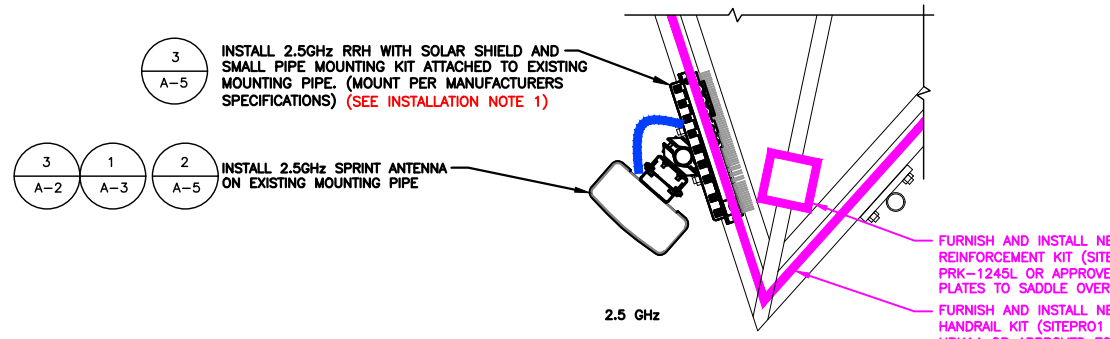


SECTION A-A

NOTE: ONE SECTOR SHOWN FOR CLARITY

SPECIAL CONSTRUCTION NOTE:
 SPRINT TOWER TOP WORK IS CONTINGENT ON THE FOLLOWING:
 * COMPLETION OF A GLOBAL STRUCTURAL STABILITY ANALYSIS (PROVIDED BY TOWER OWNER).
 * COMPLETION OF AN ANTENNA/RRH MOUNT STRUCTURAL ASSESSMENT (PROVIDED BY A&E VENDOR).
 * GC SHALL FURNISH, INSTALL AND COMPLETE ALL REQUIRED STRUCTURAL MODIFICATIONS AS INDICATED IN BEFORE-MENTIONED ANALYSIS AND ASSESSMENT.
 * SBA COMMUNICATIONS CORPORATION SHALL PROVIDE WRITTEN ACCEPTANCE/APPROVAL FOR THE COMPLETION OF ALL TOWER/FOUNDATION STRUCTURAL MODIFICATIONS INCLUDING (AS NECESSARY) CONTROLLED CONSTRUCTION INSPECTIONS, SHOP-DRAWING APPROVALS, MATERIALS TEST RESULTS, AND FINAL ENGINEER'S AFFIDAVIT.


STRUCTURAL NOTES:
 PRIOR TO COMMENCING CONSTRUCTION, GC SHALL REFER TO MOUNT ANALYSIS PROVIDED BY HDG DATED 1/22/2018 TO DETERMINE IF THERE ANY SUPPLEMENTAL OR SPECIAL INSTALLATION REQUIREMENTS, OR RELOCATION ARRANGEMENTS.

INSTALLATION NOTES:
 1. CONTRACTOR TO ENSURE THAT RRH MOUNTING DOES NOT INTERFERE WITH CLIMBING LADDER/PEGS, CABLE CLIMB, OR COAX PORTS. MONOPOLE: COLLAR-MOUNT RRH CLUSTER SHALL PROVIDE AN OPENING BETWEEN ADJACENT RRH AT LEAST 30" WIDE CENTERED ON THE EXISTING SAFETY-CLIMB AND 30" DEEP FROM THE FACE OF THE POLE. SELF-SUPPORT: RRH LEG-MOUNT OR FACE-MOUNT SHALL PROVIDE AN UNOBSTRUCTED VERTICAL CLIMBING PASSAGE AT LEAST 30" WIDE AND 30" DEEP CENTERED ON THE LEG WITH THE CLIMBING LADDER/PEGS.
 2. CONTRACTOR TO VERIFY DIAMETER OF EXISTING MONOPOLE BEFORE ORDERING PARTS.
 3. CONTRACTOR TO VERIFY IN FIELD SIZE OF EXISTING MOUNTING PIPE TO BE 2-1/2" STD (2.88 O.D.) PIPE MAST (6'-0" LONG).
 4. VERIFY EXACT RRH AND ANTENNA MODEL & AZIMUTHS WITH RF ENGINEER PRIOR TO INSTALLATION.
 5. ROTATE EXISTING ANTENNA FRAME AS NEEDED TO ACCOMMODATE INSTALL ANTENNAS.
 6. RRH PLACEMENT FOR REFERENCE ONLY. CONTRACTOR SHALL PLACE RRH IN CORRECT ORDER MATCHING INSTALL ANTENNA PLACEMENT AND ENSURE THAT THERE IS ENOUGH CLEARANCE FOR RRHS TO BE PLACED ON THE INSIDE OF THE ANTENNA FRAME.
 7. INSTALL EQUIPMENT TO BE MOUNTED PER MANUFACTURERS SPECIFICATIONS.

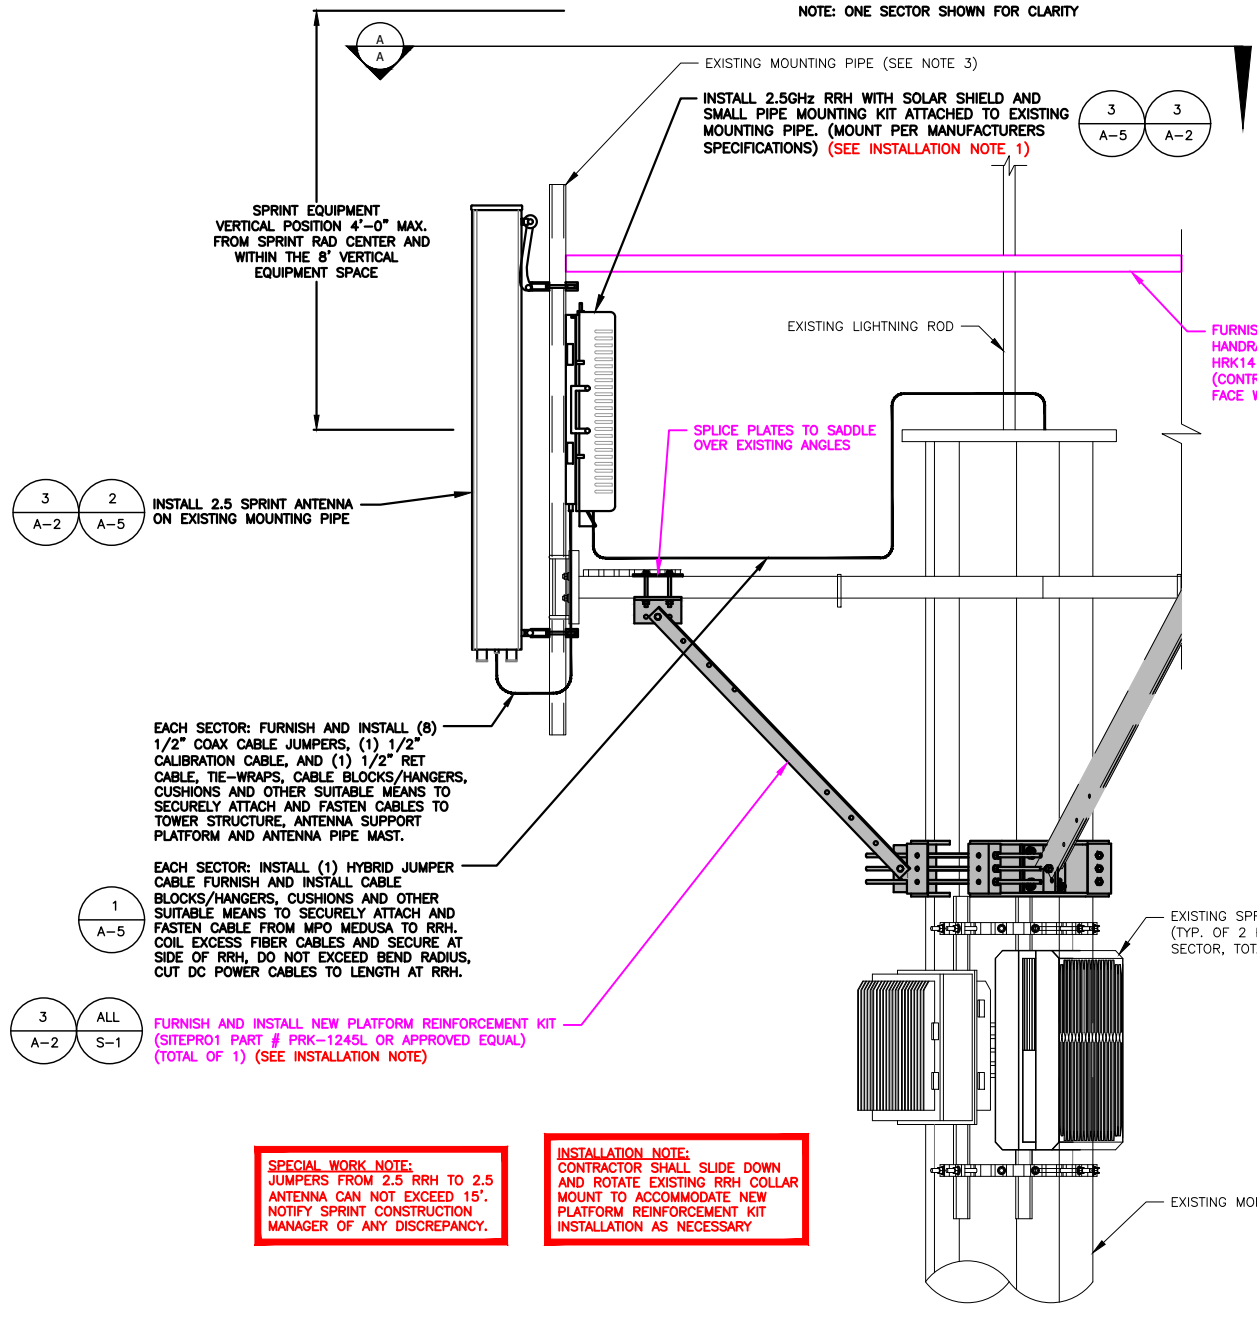

2.5 ANTENNA AND RRH MOUNTING DETAIL

SCALE: N.T.S.

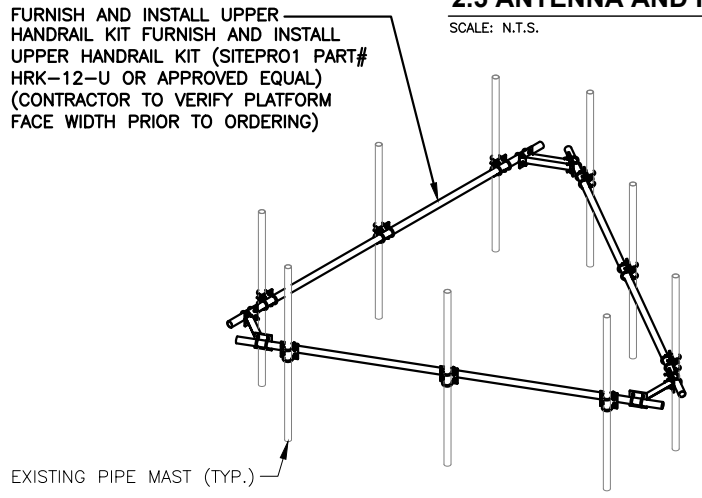


HANDRAIL KIT DETAIL

SCALE: N.T.S.


2.5 ANTENNA AND RRH PHOTO DETAIL AND EQUIPMENT SCHEMATIC

SCALE: N.T.S.

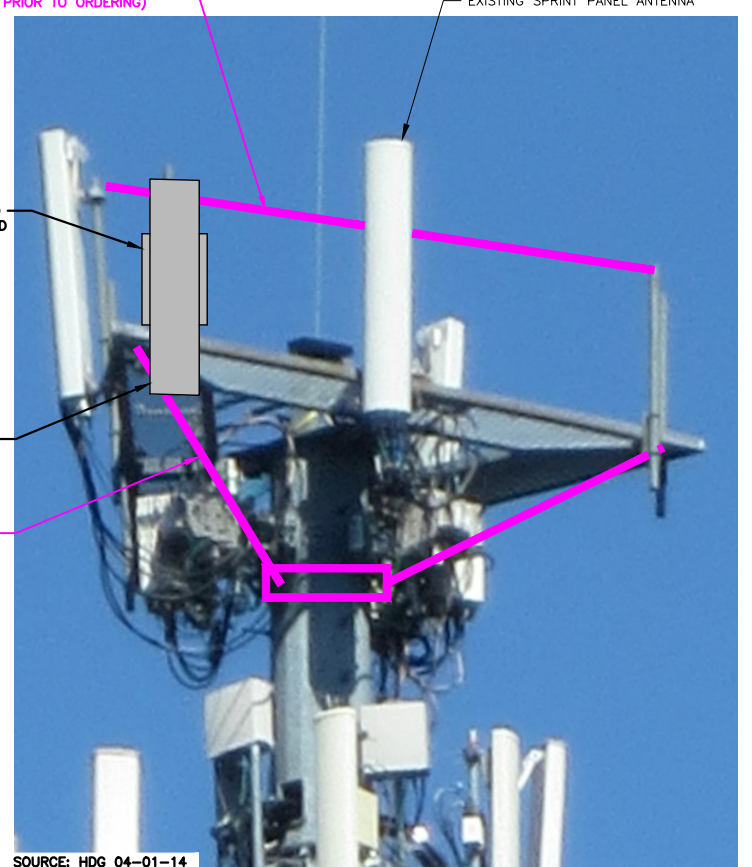

PLATFORM REINFORCEMENT KIT DETAIL

SCALE: N.T.S.

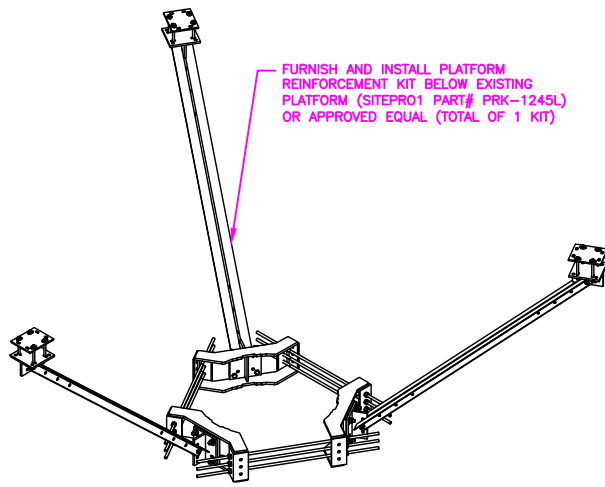


1 INTERNATIONAL BLVD, SUITE 800
 MAHWAH, NJ 07495
 TEL: (800) 357-7641



SBA COMMUNICATIONS CORP.
 134 FLANDERS ROAD, SUITE 125
 WESTBOROUGH, MA 01581
 TEL: (508) 251-0720
 FAX: (508) 251-1755



45 BEECHWOOD DRIVE
 N. ANDOVER, MA 01845
 TEL: (978) 557-5553
 FAX: (978) 336-5586



CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN

CHECKED BY: BB

APPROVED BY: DJC


SUBMITTALS

REV.	DATE	DESCRIPTION	BY
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM
1	05/16/14	ISSUED FOR CONSTRUCTION	SF
0	05/05/14	ISSUED FOR CONSTRUCTION	SF

SITE NUMBER:
 CT33XC545-B
 SITE NAME:
 W. HIGGANUM
 SITE ADDRESS:
 285 CHAMBERLAIN HILL ROAD
 HIGGANUM, CT 06441

SHEET TITLE
 STRUCTURAL
 DETAILS
 (DO MACRO)

SHEET NUMBER
 S-1

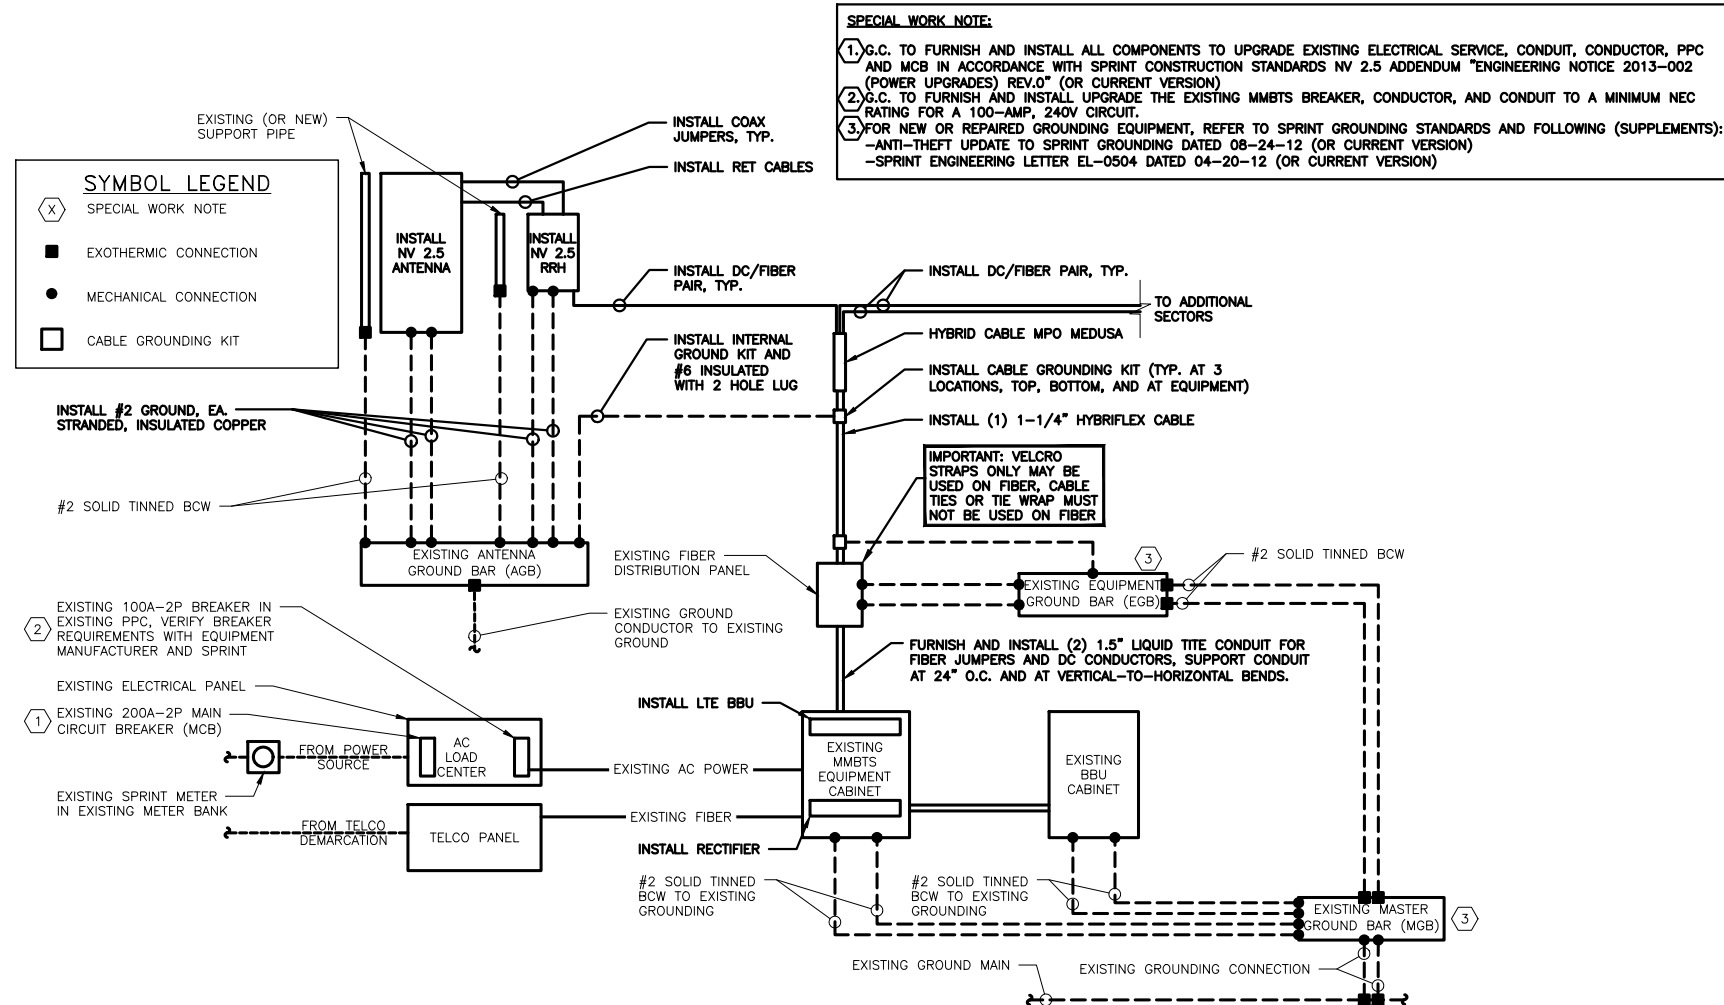


TYPICAL POWER AND GROUNDING ONE LINE DIAGRAMS
SCALE: N.T.S.

1 EXISTING 200A-2P MAIN CIRCUIT BREAKER (MCB)



2 EXISTING 100A-2P MMBTS CIRCUIT BREAKER

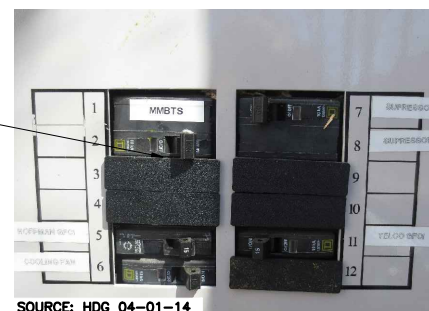

EXISTING PPC BREAKER PANEL
SCALE: N.T.S.

ELECTRICAL NOTES

- ALL ELECTRICAL WORK SHALL CONFORM TO THE REQUIREMENTS OF THE NATIONAL ELECTRICAL CODE (NEC) AS WELL AS APPLICABLE STATE AND LOCAL CODES.
- THE ELECTRICAL CONTRACTOR SHALL COORDINATE ALL CONDUIT ROUTING WITH LOCAL UTILITY COMPANIES AND SPRINT CONSTRUCTION MANAGER.
- ALL CONDUITS ROUTED BELOW GRADE SHALL TRANSITION TO RIGID GALVANIZED ELBOWS WITH RIGID GALVANIZED STEEL CONDUIT ABOVE GRADE.
- ALL METAL CONDUITS SHALL BE PROVIDED WITH GROUNDING BUSHINGS.
- GENERAL CONTRACTOR SHALL PROVIDE ALL DIRECT BURIED CONDUITS WITH PLASTIC WARNING TAPE IDENTIFYING CONTENTS. TAPE COLORS SHALL BE ORANGE FOR TELEPHONE AND RED FOR ELECTRIC.
- ALL ELECTRICAL ITEMS SHALL BE U.L. APPROVED OR LISTED AND PROCURED PER SPECIFICATION REQUIREMENTS.
- THE ELECTRICAL WORK INCLUDES ALL LABOR AND MATERIALS DESCRIBED BY DRAWINGS AND SPECIFICATIONS INCLUDING INCIDENTAL WORK TO PROVIDE COMPLETE OPERATING AND APPROVED ELECTRICAL SYSTEM.
- GENERAL CONTRACTOR SHALL PAY FEES FOR PERMITS, AND IS RESPONSIBLE FOR OBTAINING SAID PERMITS AND COORDINATION OF INSPECTIONS.
- ELECTRICAL AND TELCO WIRING OUTSIDE A BUILDING AND EXPOSED TO WEATHER SHALL BE IN WATER TIGHT GALVANIZED RIGID STEEL CONDUITS OR SCHEDULE 80 PVC (AS PERMITTED BY CODE) AND WHERE REQUIRED IN LIQUID TIGHT FLEXIBLE METAL OR NONMETALLIC CONDUITS.
- BURIED CONDUIT SHALL BE SCHEDULE 40 PVC.
- ELECTRICAL WIRING SHALL BE COPPER WITH TYPE XHHW, THWN, OR THIN INSULATION.
- RUN ELECTRICAL CONDUIT OR CABLE BETWEEN ELECTRICAL UTILITY DEMARCATON POINT AND PROJECT OWNER CELL SITE PPC AS INDICATED ON THIS DRAWING. PROVIDE FULL LENGTH PULL ROPE. COORDINATE INSTALLATION WITH UTILITY COMPANY.
- RUN TELCO CONDUIT OR CABLE BETWEEN TELEPHONE UTILITY DEMARCATON POINT AND PROJECT OWNER CELL SITE TELCO CABINET AND BTS CABINET AS INDICATED ON THIS DRAWING PROVIDE FULL LENGTH PULL ROPE IN INSTALLED TELCO CONDUIT. PROVIDE GREENLEE CONDUIT MEASURING TAPE AT EACH END.
- FIBER OPTIC CIRCUITS SHALL BE IN ACCORDANCE WITH NEC ARTICLE 770-OPTICAL FIBER CABLES AND RACEWAYS.
- COMMUNICATIONS CIRCUITS SHALL BE IN ACCORDANCE WITH NEC ARTICLE 800-COMMUNICATIONS SYSTEMS.




1 INTERNATIONAL BLVD, SUITE 800
MAHWAH, NJ 07495
TEL: (800) 357-7641



SBA COMMUNICATIONS CORP.
134 FLANDERS ROAD, SUITE 125
WESTBOROUGH, MA 01581
TEL: (508) 251-0720
FAX: (508) 251-1755



45 BEECHWOOD DRIVE
N. ANDOVER, MA 01845
TEL: (978) 557-5553
FAX: (978) 336-5586



CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN

CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM
1	05/16/14	ISSUED FOR CONSTRUCTION	SF
0	05/05/14	ISSUED FOR CONSTRUCTION	SF

SITE NUMBER:
CT33XC545-B

SITE NAME:
W. HIGGANUM

SITE ADDRESS:
285 CHAMBERLAIN HILL ROAD
HIGGANUM, CT 06441

SHEET TITLE

ONE LINE DIAGRAM
(DO MACRO)


SHEET NUMBER

E-1

SYMBOL LEGEND

- EXOTHERMIC CONNECTION
- MECHANICAL CONNECTION
- CABLE GROUNDING KIT

UNLESS NOTED OTHERWISE, ALL BONDING CONDUCTORS ARE 2# SOLID TINNED BCW.

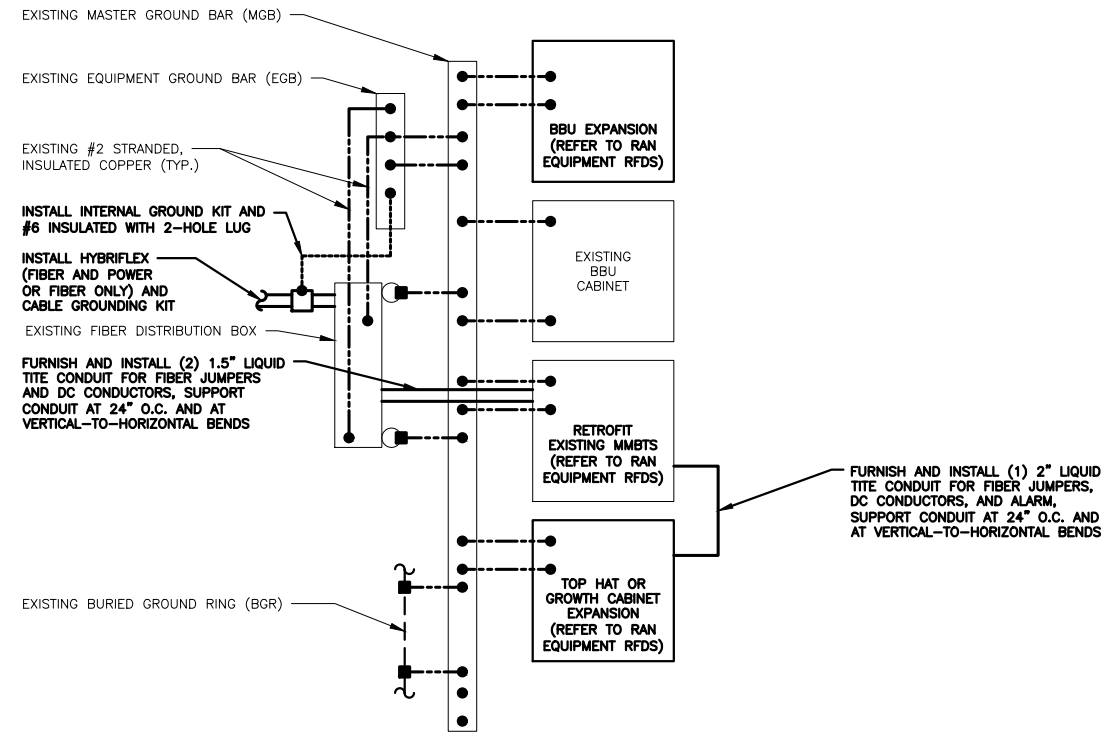

NOTE: HYBRIFLEX (FIBER & POWER) AND HYBRIFLEX (FIBER-ONLY) SHOWN. REFER TO RAN EQUIPMENT RFDS FOR SITE-SPECIFIC SCENARIO.

2.5 RAN EQUIPMENT GROUNDING SCHEMATIC 1
SCALE: N.T.S. E-2

PROTECTIVE GROUNDING SYSTEMS GENERAL NOTES:

1. GROUNDING SHALL BE IN ACCORDANCE WITH NEC ARTICLE 250-GROUNDING AND BONDING.
2. GROUNDING SHALL BE IN ACCORDANCE WITH SPRINT SSEO DOCUMENTS 3.018.02.004 "BONDING, GROUNDING AND TRANSIENT PROTECTION FOR CELL SITES" AND 3.018.10.002 "SITE RESISTANCE TO EARTH TESTING".
3. PROVIDE GROUND CONNECTIONS FOR ALL METALLIC STRUCTURES, ENCLOSURES, RACEWAYS AND OTHER CONDUCTIVE ITEMS ASSOCIATED WITH THE INSTALLATION OF CARRIER'S EQUIPMENT.
4. GROUND CONNECTIONS: CLEAN SURFACES THOROUGHLY BEFORE APPLYING GROUND LUGS OR CLAMPS. IF SURFACE IS COATED, REMOVE THE COATING, APPLY A NON-CORROSIVE APPROVED COMPOUND TO CLEAN SURFACE AND INSTALL LUGS OR CLAMPS. WHERE GALVANIZING IS REMOVED FROM METAL, IT SHALL BE PAINTED OR TOUCHED UP WITH "GALVAMOX" OR EQUAL.
5. ALL GROUNDING WIRES SHALL PROVIDE A STRAIGHT, DOWNWARD PATH TO GROUND WITH GRADUAL BENDS AS REQUIRED. GROUND WIRES SHALL NOT BE LOOPED OR SHARPLY BENT.
6. ALL CLAMPS AND SUPPORTS USED TO SUPPORT THE GROUNDING SYSTEM CONDUCTORS AND PVC CONDUITS SHALL BE PVC TYPE (NON CONDUCTIVE). DO NOT USE METAL BRACKETS OR SUPPORTS WHICH WOULD FORM A COMPLETE RING AROUND ANY GROUNDING CONDUCTOR.
7. ALL GROUND WIRES SHALL BE #2 SOLID TINNED BCW UNLESS NOTED OTHERWISE.
8. PROVIDE DEDICATED #2 AWG COPPER GROUND WIRE FROM EACH ANTENNA MOUNTING PIPE TO ASSOCIATED CIGBE.
9. GROUND ANTENNA BASES, FRAMES, CABLE RACKS, AND OTHER METALLIC COMPONENTS WITH #2 INSULATED TINNED STRANDED COPPER GROUNDING CONDUCTORS AND CONNECT TO INSULATED SURFACE MOUNTED GROUND BARS. CONNECTION DETAILS SHALL FOLLOW MANUFACTURER'S SPECIFICATIONS FOR GROUNDING.
10. EACH EQUIPMENT CABINET SHALL BE CONNECTED TO THE MASTER ISOLATION GROUND BAR (MGB) WITH #2 SOLID TINNED BCW EQUIPMENT CABINETS WALL HAVE (2) CONNECTIONS.
11. GROUND HYBRIFLEX SHIELD AT TOP, BOTTOM AND AT TRANSITION TO HYBRIFLEX JUMPER CABLES AT EQUIPMENT CABINET ENTRANCE USING MANUFACTURER'S GUIDELINES. WHEN HYBRIFLEX CABLE EXCEEDS 200', GROUND AT INTERVALS NOT EXCEEDING 100'.
12. THE CONTRACTOR SHALL VERIFY THAT THE EXISTING GROUND BARS HAVE ENOUGH SPACE/HOLES FOR ADDITIONAL TWO HOLE LUGS.
13. EXOTHERMIC WELDING IS RECOMMENDED FOR GROUNDING CONNECTION WHERE PRACTICAL OTHERWISE, THE CONNECTION SHALL BE MADE USING COMPRESSION TYPE-2 HOLES, LONG BARREL LUGS OR DOUBLE CRIMP "C" CLAMP. THE COPPER CABLES SHALL BE COATED WITH AN ANTI-OXIDANT (THOMAS BETTS KOPR-SHILD) BEFORE MAKING THE CRIMP CONNECTIONS THE CONTRACTOR SHALL FOLLOW MANUFACTURER'S RECOMMENDED TORQUES ON THE BOLT ASSEMBLY TO SECURE CONNECTIONS.
14. AT ALL TERMINATIONS AT EQUIPMENT ENCLOSURES, PANEL, AND FRAMES OF EQUIPMENT AND WHERE EXPOSED FOR GROUNDING, CONDUCTOR TERMINATION SHALL BE PERFORMED UTILIZING TWO HOLE BOLTED TONGUE COMPRESSION TYPE LUGS WITH STAINLESS STEEL SELF-TAPPING SCREWS.
15. THE MASTER GROUND BAR (MGB) SHALL BE MADE OF BARE 1/4"x2" COPPER (FOR OUTDOOR APPLICATIONS IT SHALL BE TINNED COPPER) AND LARGE ENOUGH TO ACCOMMODATE THE REQUIRED NUMBER OF GROUND CONNECTIONS. THE HARDWARE SECURING THE MGB SHALL ELECTRICAL INSULATE THE MGB FROM ANY STRUCTURE TO WHICH IT IS FASTENED.
16. ALL BOLTS, WASHERS, AND NUTS USED ON GROUNDING CONNECTIONS SHALL BE STAINLESS STEEL.
17. ALL GROUNDING CONNECTIONS SHALL BE COATED WITH A COPPER SHIELD ANTI-CORROSIVE AGENT SUCH AS T&B KOPR SHIELD. VERIFY PRODUCT WITH SPRINT CONSTRUCTION MANAGER.
18. FOR NEW OR REPAIRED GROUNDING EQUIPMENT. REFER TO SPRINT GROUNDING STANDARDS AND FOLLOWING (SUPPLEMENTS):
-ANTI-THEFT UPDATE TO SPRINT GROUNDING DATED: 08-24-12 (OR CURRENT VERSION)
-SPRINT ENGINEERING LETTER EL-0504 DATED: 04-20-12 (OR CURRENT VERSION)




1 INTERNATIONAL BLVD, SUITE 800
MAHWAH, NJ 07495
TEL: (800) 357-7641



SBA COMMUNICATIONS CORP.
134 FLANDERS ROAD, SUITE 125
WESTBOROUGH, MA 01581
TEL: (508) 251-0720
FAX: (508) 251-1755



45 BEECHWOOD DRIVE
N. ANDOVER, MA 01845
TEL: (978) 557-5553
FAX: (978) 336-5586



CONSTRUCTION DRAWINGS ARE VALID FOR SIX MONTHS AFTER ENGINEER OF RECORD'S STAMPED AND SIGNED SUBMITTAL DATE LISTED HEREIN

CHECKED BY: BB

APPROVED BY: DJC

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
2	01/26/18	ISSUED FOR CONSTRUCTION	DJM
1	05/16/14	ISSUED FOR CONSTRUCTION	SF
0	05/05/14	ISSUED FOR CONSTRUCTION	SF

SITE NUMBER:
CT33XC545-B

SITE NAME:
W. HIGGANUM


SITE ADDRESS:
285 CHAMBERLAIN HILL ROAD
HIGGANUM, CT 06441

SHEET TITLE

GROUNDING DETAILS AND NOTES
(DO MACRO)

SHEET NUMBER

E-2

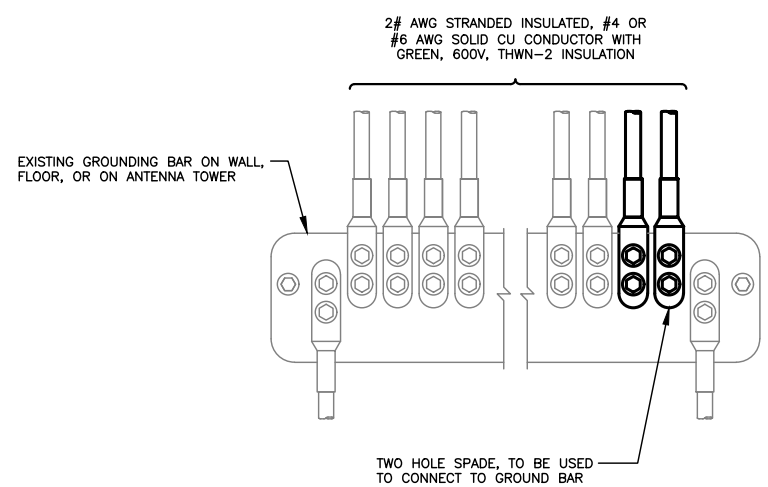


NOTES

1. APPLY NO-OX TO LUG AND BAR CONTACT SURFACE. DO NOT COAT INLINE LUG.
2. IF STOLEN GROUND BARS ARE ENCOUNTERED, CONTACT SPRINT CM FOR REPLACEMENT THREADED ROD KIT.

INSTALLATION OF GROUNDING CONDUCTOR TO GROUNDING BAR

SCALE: N.T.S.

2
E-2

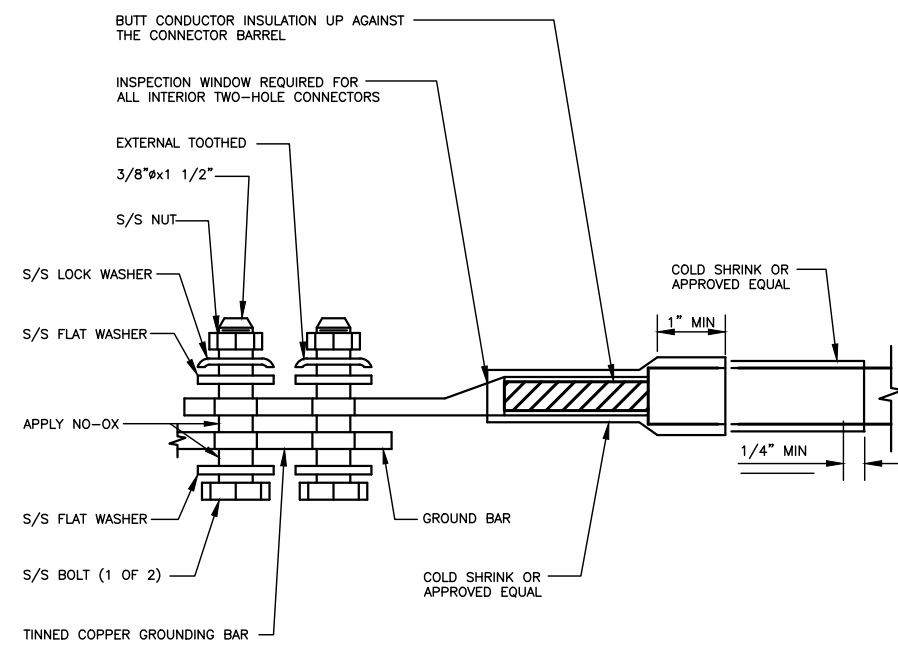

TWO HOLE LUG

SCALE: N.T.S.

3
E-2