

KENNETH C. BALDWIN

280 Trumbull Street
Hartford, CT 06103-3597
Main (860) 275-8200
Fax (860) 275-8299
kbaldwin@rc.com
Direct (860) 275-8345

Also admitted in Massachusetts
and New York

October 6, 2022

Via Electronic Mail

Melanie A. Bachman, Esq.
Executive Director/Staff Attorney
Connecticut Siting Council
10 Franklin Square
New Britain, CT 06051

Re: **Petition No. 1470 – Petition for a Declaratory Ruling on the Need to Obtain a Siting Council Certificate for the Installation of a Temporary Telecommunications Facility at Sacred Heart University (SHU), 5151 Park Avenue, Fairfield, Connecticut**

Dear Attorney Bachman:

As you are aware, the Council approved Petition No. 1470 on December 16, 2021, subject to conditions including, but not limited to, the delegation of “any project changes” to Council staff.

The purpose of this letter is to notify you and the Council that the Cellco intends to remove two (2) existing antennas from its Alpha Sector and install two (2) MX10FIT645 antennas on the existing antenna mounts. Cellco also intends to install three (3) additional remote radio heads behind its antennas.

In support of these project changes, attached please find the following:

- Updated Stamped and Signed Mount Analysis
- Updated Stamped and Signed Structural Analysis
- Revised C-Squared Calculated Radio Frequency Exposure Report

Melanie A. Bachman, Esq.
October 6, 2022
Page 2

We respectfully request staff approval for these project changes. If you have any questions or need any additional information about this change, please contact me.

Sincerely,

A handwritten signature in black ink, appearing to read "Kenneth C. Baldwin". The signature is fluid and cursive, with a long horizontal stroke at the end.

Kenneth C. Baldwin

Attachments

Copy to:

Anthony R. Befera
Brian Ross
Michael Humphreys



October 4, 2022



20 Alexander Drive, 2nd Floor
Wallington, CT 06492

RE: Site Name: PLATTSVILLE RELO CT
 TEP Number: 0316498
 Site Address: 5151 Park Avenue
 Fairfield, CT 06825

To Whom It May Concern:

TEP Northeast (TEP NE) has been authorized by Verizon to perform a mount analysis on the existing Verizon antenna/RRH mount to determine their capability of supporting the following loading:

- **(4) MX10FIT665-CC Antennas (70.9"x12.2"x7.5" – Wt. = 53 lbs. /each)**
- **(2) MX10FIT645-XX Antennas (70.9"x15.0"x7.4" – Wt. = 53 lbs. /each)**
- **(4) RF4439D-25A RRH's (15.0"x15.0"x10.0" – Wt. = 98 lbs. /each)**
- **(4) RF4440D-13A RRH's (15.0"x15.0"x8.1" – Wt. = 82 lbs. /each)**
- **(4) RT4401-48A RRH's (13.9"x8.6"x4.2" – Wt. = 19 lbs. /each)**
- **(1) OVP Box (28.9"x15.7"x10.3" – Wt. = 32 lbs. /each)**

**Proposed equipment shown in bold*

Mount fabrication drawings prepared by SitePro1 P/N SNP12-3XX dated January 7, 2015 and Support Rail fabrications drawings by SitePro1 P/N HRA-12 dated July 7, 2016 were used to perform this analysis.

Mount Analysis Methods:

- This analysis was conducted in accordance with EIA/TIA-222-H, Structural Standards for Steel Antenna Towers and Antenna Supporting Structures and the International Building Code 2015 with 2018 Connecticut State Building Code.
- TEP NE considers this mount to be asymmetrical and has applied wind loads in 30 degree increments all around the mount. Per TIA-222-H and Appendix N of the Connecticut State Building Code, the max basic wind speed for this site is equal to 125 mph with a max basic wind speed with ice of 50 mph and a max ice thickness of 1.0 in. An escalated ice thickness of 1.14 in was used for this analysis.
- TEP NE considers this site to be exposure category C; tower is located near large, flat, open, terrain/grasslands.
- TEP NE considers this site to be topographic category 1; tower is located on flat terrain or the bottom of a hill or ridge.
- TEP NE considers this site to have a spectral response acceleration parameter at short periods, S_s , of 0.215 and a spectral response acceleration parameter at a period of 1 second, S_1 , of 0.055.
- The mount has been analyzed with load combinations consisting of 500 lbs live load using a service wind speed of 30 mph wind on the worst case antenna. Analysis performed on each antenna pipe to determine worst case location; worst case location was antenna position 2.
- The mount has been analyzed with load combinations consisting of a 250 lbs live load in a worst case location on the mount.
- The existing mount is secured to the existing monopole with ring mounts and threaded rods. TEP NE considers the threaded rods to be the governing connection member.

Based on our evaluation, we have determined that the existing mount **IS CAPABLE** of supporting the proposed installation.

| | Component | Controlling Load Case | Stress Ratio | Pass/Fail |
|-----------------------|-----------|-----------------------|--------------|-----------|
| Existing Mount Rating | 56 | LC3 | 67% | PASS |

Reference Documents:

- Mount fabrication drawings prepared by SitePro1 P/N SNP12-3XX dated January 7, 2015.
- Support Rail Kit drawings prepared by SitePro1 P/N HRA-12 dated July 7, 2016.

This determination was based on the following limitations and assumptions:

1. TEP NE is not responsible for any modifications completed prior to and hereafter which TEP NE was not directly involved.
2. All structural members and their connections are assumed to be in good condition and are free from defects with no deterioration to its member capacities.
3. All antennas, coax cables and waveguide cables are assumed to be properly installed and supported as per the manufacturer's requirements.
4. The existing mount has been adequately secured to the tower structure per the mount manufacturer's specifications.
5. All components pertaining to Verizon's mount must be tightened and re-plumbed prior to the installation of new appurtenances.
6. TEP NE performed a localized analysis on the mount itself and not on the supporting tower structure.

Please feel free to contact our office should you have any questions.

Respectfully Submitted,
TEP Northeast




Michael Cabral
Director



Daniel P. Hamm, PE
Vice President

FIELD PHOTOS:

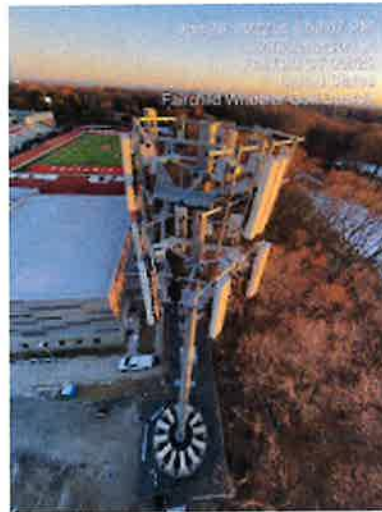



**Wind & Ice
Calculations**

Date: 10/5/2022
 Project Name: PLATTSVILLE RELO CT
 Designed By: JC Checked By: MSC



2.6.5.2 Velocity Pressure Coeff:

$$K_z = 2.01 (z/z_g)^{2/\alpha}$$

$K_z =$ **1.319** $z =$ 121.6 (ft)
 $z_g =$ 900 (ft)
 $\alpha =$ 9.5

$K_{zmin} \leq K_z \leq 2.01$

Table 2-4

| Exposure | Z _g | α | K _{zmin} | K _c |
|----------|----------------|------|-------------------|----------------|
| B | 1200 ft | 7.0 | 0.70 | 0.9 |
| C | 900 ft | 9.5 | 0.85 | 1.0 |
| D | 700 ft | 11.5 | 1.03 | 1.1 |

2.6.6.2 Topographic Factor:

Table 2-5

| Topo. Category | K _t | f |
|----------------|----------------|------|
| 2 | 0.43 | 1.25 |
| 3 | 0.53 | 2.0 |
| 4 | 0.72 | 1.5 |

$$K_{zt} = [1 + (K_c K_t / K_h)]^2$$

$K_{zt} =$ **1**

(If Category 1 then K_{zt} = 1.0)

Category = **1**

$$K_h = e^{-(z/H)}$$

$K_h =$ 1
 $K_c =$ 1.0 (from Table 2-4)
 $K_t =$ 0 (from Table 2-5)
 $f =$ 0 (from Table 2-5)
 $z =$ 121.6
 $z_g =$ 285 (Mean elevation of base of structure above sea level)
 $H =$ 0 (Ht. of the crest above surrounding terrain)
 $K_{zt} =$ 1.00 (from 2.6.6.2.1)
 $K_e =$ 0.99 (from 2.6.8)

2.6.10 Design Ice Thickness

Max Ice Thickness =
 Importance Factor =

$t_i =$ 1.00 in
 $I =$ 1.00 (from Table 2-3)
 $K_{iz} =$ 1.14 (from Sec. 2.6.10)

$$t_{iz} = t_i * I * K_{iz} * (K_{zt})^{0.35}$$

$t_{iz} =$ 1.14 in

Date: 10/5/2022
 Project Name: PLATTSVILLE RELO CT
 Designed By: JC Checked By: MSC



2.6.9 Gust Effect Factor

2.6.9.1 Self Supporting Lattice Structures

$G_h = 1.0$ Latticed Structures > 600 ft

$G_h = 0.85$ Latticed Structures 450 ft or less

$G_h = 0.85 + 0.15 [h/150 - 3.0]$

h= ht. of structure

h= 125.4

$G_h = 0.85$

2.6.9.2 Guyed Masts

$G_h = 0.85$

2.6.9.3 Pole Structures

$G_h = 1.1$

2.6.9 Appurtenances

$G_h = 1.0$

2.6.9.4 Structures Supported on Other Structures

(Cantilevered tubular or latticed spines, pole, structures on buildings (ht. : width ratio > 5)

$G_h = 1.35$

$G_h = 1.00$

2.6.11.2 Design Wind Force on Appurtenances

$F = q_z * G_h * (EPA)_A$

$q_z = 0.00256 * K_z * K_{zt} * K_s * K_e * K_d * V_{max}^2$

| | |
|---------------|-------|
| $q_z =$ | 49.60 |
| $q_z (ice) =$ | 7.94 |
| $q_z (30) =$ | 2.86 |

| | |
|-------------------|-------------------------------|
| $K_z =$ | 1.319 (from 2.6.5.2) |
| $K_{zt} =$ | 1.0 (from 2.6.6.2.1) |
| $K_s =$ | 1.0 (from 2.6.7) |
| $K_e =$ | 0.99 (from 2.6.8) |
| $K_d =$ | 0.95 (from Table 2-2) |
| $V_{max} =$ | 125 mph (Ultimate Wind Speed) |
| $V_{max (ice)} =$ | 50 mph |
| $V_{30} =$ | 30 mph |

Table 2-2

| Structure Type | Wind Direction Probability Factor, K_d |
|---|--|
| Latticed structures with triangular, square or rectangular cross sections | 0.85 |
| Tubular pole structures, latticed structures with other cross sections, appurtenances | 0.95 |
| Tubular pole structures supporting antennas enclosed within a cylindrical shroud | 1.00 |

Date: 10/5/2022
 Project Name: PLATTSVILLE RELO CT
 Designed By: JC Checked By: MSC



Determine Ca:

Table 2-9

| Force Coefficients (Ca) for Appurtenances | | | | |
|---|---------------------------------------|----------------------------|----------------------------|----------------------------|
| Member Type | | Aspect Ratio ≤ 2.5 | Aspect Ratio = 7 | Aspect Ratio ≥ 25 |
| | | Ca | Ca | Ca |
| Flat | | 1.2 | 1.4 | 2.0 |
| Square/Rectangular HSS | | $1.2 - 2.8(r_s) \geq 0.85$ | $1.4 - 4.0(r_s) \geq 0.90$ | $2.0 - 6.0(r_s) \geq 1.25$ |
| Round | C < 39 (Subcritical) | 0.7 | 0.8 | 1.2 |
| | $39 \leq C \leq 78$ (Transitional) | $4.14/(C^{0.485})$ | $3.66/(C^{0.415})$ | $46.8/(C^{1.0})$ |
| | C > 78 (Supercritical) | 0.5 | 0.6 | 0.6 |

Aspect Ratio is the overall length/width ratio in the plane normal to the wind direction.
 (Aspect ratio is independent of the spacing between support points of a linear appurtenance.)

Note: Linear interpolation may be used for aspect ratios other than those shown.

Ice Thickness =

1.14 in

Angle = 0 (deg)

Equivalent Angle = 180 (deg)

| Appurtenances | Height | Width | Depth | Flat Area | Aspect Ratio | Ca | Force (lbs) | Force (lbs) (w/ Ice) | Force (lbs) (30 mph) |
|----------------------------|--------|-------|-------|-----------|--------------|------|-------------|----------------------|----------------------|
| MX10FIT665-CC Antennas | 70.9 | 12.2 | 7.5 | 6.01 | 5.81 | 1.35 | 401 | 79 | 23 |
| MX10FIT645-XX Antennas | 70.9 | 15.0 | 7.4 | 7.39 | 4.73 | 1.30 | 476 | 91 | 27 |
| RF4439D-25A RRH | 15.0 | 15.0 | 10.0 | 1.56 | 1.00 | 1.20 | 93 | 20 | 5 |
| RF4439D-25A RRH (Shielded) | 15.0 | 0.0 | 10.0 | 0.00 | 0.00 | 1.20 | 0 | 3 | 0 |
| RF4440D-13A RRH | 15.0 | 15.0 | 8.1 | 1.56 | 1.00 | 1.20 | 93 | 20 | 5 |
| RT4401-48A RRH | 13.9 | 8.6 | 4.2 | 0.83 | 1.62 | 1.20 | 49 | 12 | 3 |
| RT4401-48A RRH (Shielded) | 13.9 | 0.0 | 4.2 | 0.00 | 0.00 | 1.20 | 0 | 2 | 0 |
| OVP Box | 28.9 | 15.7 | 10.3 | 3.15 | 1.84 | 1.20 | 188 | 37 | 11 |
| 2" Pipe | 2.4 | 12.0 | | 0.20 | 0.20 | 1.20 | 12 | | |
| 3-1/2" Pipe | 4.0 | 12.0 | | 0.33 | 0.33 | 1.20 | 20 | | |
| L4x4 Angle | 4.0 | 12.0 | | 0.33 | 0.33 | 2.00 | 33 | | |
| HSS 4x4 | 4.0 | 12.0 | | 0.33 | 0.33 | 1.25 | 21 | | |

Date: 10/5/2022
 Project Name: PLATTSVILLE RELO CT
 Designed By: JC Checked By: MSC



WIND LOADS

Angle = 30 (deg) Ice Thickness = 1.14 in. Equivalent Angle = 210 (deg)

WIND LOADS WITH NO ICE:

| Appurtenances | Height | Width | Depth | Flat Area (normal) | Flat Area (side) | Aspect Ratio | Aspect Ratio | Ca (normal) | Ca (side) | Force (lbs) | Force (lbs) | Force (lbs) |
|----------------------------|--------|-------|-------|--------------------|------------------|--------------|--------------|-------------|-----------|-------------|-------------|-------------|
| MX10FIT665-CC Antennas | 70.9 | 12.2 | 7.5 | 6.01 | 3.69 | 5.81 | 9.45 | 1.35 | 1.48 | 401 | 271 | 369 |
| MX10FIT645-XX Antennas | 70.9 | 15.0 | 7.4 | 7.39 | 3.64 | 4.73 | 9.58 | 1.30 | 1.49 | 476 | 269 | 424 |
| RF4439D-25A RRH | 15.0 | 15.0 | 10.0 | 1.56 | 1.04 | 1.00 | 1.50 | 1.20 | 1.20 | 93 | 62 | 85 |
| RF4439D-25A RRH (Shielded) | 15.0 | 7.5 | 10.0 | 0.78 | 1.04 | 2.00 | 1.50 | 1.20 | 1.20 | 47 | 62 | 50 |
| RF4440D-13A RRH | 15.0 | 15.0 | 8.1 | 1.56 | 0.84 | 1.00 | 1.85 | 1.20 | 1.20 | 93 | 50 | 82 |
| RT4401-48A RRH | 13.9 | 8.6 | 4.2 | 0.83 | 0.41 | 1.62 | 3.31 | 1.20 | 1.24 | 49 | 25 | 43 |
| RT4401-48A RRH (Shielded) | 13.9 | 4.3 | 4.2 | 0.42 | 0.41 | 3.23 | 3.31 | 1.23 | 1.24 | 25 | 25 | 25 |
| OVP Box | 28.9 | 15.7 | 10.3 | 3.15 | 2.07 | 1.84 | 2.81 | 1.20 | 1.21 | 188 | 124 | 172 |

WIND LOADS WITH ICE:

| | | | | | | | | | | | | |
|----------------------------|------|------|------|------|------|------|------|------|------|----|----|----|
| MX10FIT665-CC Antennas | 73.2 | 14.5 | 9.8 | 7.36 | 4.97 | 5.05 | 7.48 | 1.31 | 1.42 | 77 | 56 | 71 |
| MX10FIT645-XX Antennas | 73.2 | 17.3 | 9.7 | 8.78 | 4.92 | 4.24 | 7.56 | 1.28 | 1.42 | 89 | 55 | 81 |
| RF4439D-25A RRH | 17.3 | 17.3 | 12.3 | 2.07 | 1.47 | 1.00 | 1.41 | 1.20 | 1.20 | 20 | 14 | 18 |
| RF4439D-25A RRH (Shielded) | 17.3 | 8.6 | 12.3 | 1.04 | 1.47 | 2.00 | 1.41 | 1.20 | 1.20 | 10 | 14 | 11 |
| RF4440D-13A RRH | 17.3 | 17.3 | 10.4 | 2.07 | 1.25 | 1.00 | 1.66 | 1.20 | 1.20 | 20 | 12 | 18 |
| RT4401-48A RRH | 16.2 | 10.9 | 6.5 | 1.22 | 0.73 | 1.49 | 2.50 | 1.20 | 1.20 | 12 | 7 | 10 |
| RT4401-48A RRH (Shielded) | 16.2 | 5.4 | 6.5 | 0.61 | 0.73 | 2.97 | 2.50 | 1.22 | 1.20 | 6 | 7 | 6 |
| OVP Box | 31.2 | 18.0 | 12.6 | 3.89 | 2.72 | 1.73 | 2.48 | 1.20 | 1.20 | 97 | 26 | 34 |

WIND LOADS AT 30 MPH:

| | | | | | | | | | | | | |
|----------------------------|------|------|------|------|------|------|------|------|------|----|----|----|
| MX10FIT665-CC Antennas | 70.9 | 12.2 | 7.5 | 6.01 | 3.69 | 5.81 | 9.45 | 1.35 | 1.48 | 23 | 16 | 21 |
| MX10FIT645-XX Antennas | 70.9 | 15.0 | 7.4 | 7.39 | 3.64 | 4.73 | 9.58 | 1.30 | 1.49 | 27 | 15 | 24 |
| RF4439D-25A RRH | 15.0 | 15.0 | 10.0 | 1.56 | 1.04 | 1.00 | 1.50 | 1.20 | 1.20 | 5 | 4 | 5 |
| RF4439D-25A RRH (Shielded) | 15.0 | 7.5 | 10.0 | 0.78 | 1.04 | 2.00 | 1.50 | 1.20 | 1.20 | 3 | 4 | 3 |
| RF4440D-13A RRH | 15.0 | 15.0 | 8.1 | 1.56 | 0.84 | 1.00 | 1.85 | 1.20 | 1.20 | 5 | 3 | 5 |
| RT4401-48A RRH | 13.9 | 8.6 | 4.2 | 0.83 | 0.41 | 1.62 | 3.31 | 1.20 | 1.24 | 3 | 1 | 2 |
| RT4401-48A RRH (Shielded) | 13.9 | 4.3 | 4.2 | 0.42 | 0.41 | 3.23 | 3.31 | 1.23 | 1.24 | 1 | 1 | 1 |
| OVP Box | 28.9 | 15.7 | 10.3 | 3.15 | 2.07 | 1.84 | 2.81 | 1.20 | 1.21 | 11 | 7 | 10 |

Date: 10/5/2022
 Project Name: PLATTSVILLE RELO CT
 Designed By: JC Checked By: MSC



WIND LOADS

Angle = 60 (deg) Ice Thickness = 1.14 in. Equivalent Angle = 240 (deg)

WIND LOADS WITH NO ICE:

| Appurtenances | Height | Width | Depth | Flat Area (normal) | Flat Area (side) | Ratio (normal) | Ratio (side) | Ca (normal) | Ca (side) | Force (lbs) | Force (lbs) | Force (lbs) |
|----------------------------|--------|-------|-------|-----------------------|---------------------|-------------------|-----------------|----------------|--------------|----------------|----------------|----------------|
| MX10FIT665-CC Antennas | 70.9 | 12.2 | 7.5 | 6.01 | 3.69 | 5.81 | 9.45 | 1.35 | 1.48 | 401 | 271 | 304 |
| MX10FIT645-XX Antennas | 70.9 | 15.0 | 7.4 | 7.39 | 3.64 | 4.73 | 9.58 | 1.30 | 1.49 | 476 | 269 | 320 |
| RF4439D-25A RRH | 15.0 | 15.0 | 10.0 | 1.56 | 1.04 | 1.00 | 1.50 | 1.20 | 1.20 | 93 | 62 | 70 |
| RF4439D-25A RRH (Shielded) | 15.0 | 11.3 | 10.0 | 1.17 | 1.04 | 1.33 | 1.50 | 1.20 | 1.20 | 70 | 62 | 64 |
| RF4440D-13A RRH | 15.0 | 15.0 | 8.1 | 1.56 | 0.84 | 1.00 | 1.85 | 1.20 | 1.20 | 93 | 50 | 61 |
| RT4401-48A RRH | 13.9 | 8.6 | 4.2 | 0.83 | 0.41 | 1.62 | 3.31 | 1.20 | 1.24 | 49 | 25 | 31 |
| RT4401-48A RRH (Shielded) | 13.9 | 6.5 | 4.2 | 0.62 | 0.41 | 2.16 | 3.31 | 1.20 | 1.24 | 37 | 25 | 28 |
| OVP Box | 28.9 | 15.7 | 10.3 | 3.15 | 2.07 | 1.84 | 2.81 | 1.20 | 1.21 | 188 | 124 | 140 |

WIND LOADS WITH ICE:

| | | | | | | | | | | | | |
|----------------------------|------|------|------|------|------|------|------|------|------|----|----|----|
| MX10FIT665-CC Antennas | 73.2 | 14.5 | 9.8 | 7.36 | 4.97 | 5.05 | 7.48 | 1.31 | 1.42 | 77 | 56 | 61 |
| MX10FIT645-XX Antennas | 73.2 | 17.3 | 9.7 | 8.78 | 4.92 | 4.24 | 7.56 | 1.28 | 1.42 | 89 | 55 | 64 |
| RF4439D-25A RRH | 17.3 | 17.3 | 12.3 | 2.07 | 1.47 | 1.00 | 1.41 | 1.20 | 1.20 | 20 | 14 | 15 |
| RF4439D-25A RRH (Shielded) | 17.3 | 13.0 | 12.3 | 1.55 | 1.47 | 1.33 | 1.41 | 1.20 | 1.20 | 15 | 14 | 14 |
| RF4440D-13A RRH | 17.3 | 17.3 | 10.4 | 2.07 | 1.25 | 1.00 | 1.66 | 1.20 | 1.20 | 20 | 12 | 14 |
| RT4401-48A RRH | 16.2 | 10.9 | 6.5 | 1.22 | 0.73 | 1.49 | 2.50 | 1.20 | 1.20 | 12 | 7 | 8 |
| RT4401-48A RRH (Shielded) | 16.2 | 8.2 | 6.5 | 0.92 | 0.73 | 1.98 | 2.50 | 1.20 | 1.20 | 9 | 7 | 7 |
| OVP Box | 31.2 | 18.0 | 12.6 | 3.89 | 2.72 | 1.73 | 2.48 | 1.20 | 1.20 | 37 | 26 | 29 |

WIND LOADS AT 30 MPH:

| | | | | | | | | | | | | |
|----------------------------|------|------|------|------|------|------|------|------|------|----|----|----|
| MX10FIT665-CC Antennas | 70.9 | 12.2 | 7.5 | 6.01 | 3.69 | 5.81 | 9.45 | 1.35 | 1.48 | 23 | 16 | 18 |
| MX10FIT645-XX Antennas | 70.9 | 15.0 | 7.4 | 7.39 | 3.64 | 4.73 | 9.58 | 1.30 | 1.49 | 27 | 15 | 18 |
| RF4439D-25A RRH | 15.0 | 15.0 | 10.0 | 1.56 | 1.04 | 1.00 | 1.50 | 1.20 | 1.20 | 5 | 4 | 4 |
| RF4439D-25A RRH (Shielded) | 15.0 | 11.3 | 10.0 | 1.17 | 1.04 | 1.33 | 1.50 | 1.20 | 1.20 | 4 | 4 | 4 |
| RF4440D-13A RRH | 15.0 | 15.0 | 8.1 | 1.56 | 0.84 | 1.00 | 1.85 | 1.20 | 1.20 | 5 | 3 | 4 |
| RT4401-48A RRH | 13.9 | 8.6 | 4.2 | 0.83 | 0.41 | 1.62 | 3.31 | 1.20 | 1.24 | 3 | 1 | 2 |
| RT4401-48A RRH (Shielded) | 13.9 | 6.5 | 4.2 | 0.62 | 0.41 | 2.16 | 3.31 | 1.20 | 1.24 | 2 | 1 | 2 |
| OVP Box | 28.9 | 15.7 | 10.3 | 3.15 | 2.07 | 1.84 | 2.81 | 1.20 | 1.21 | 11 | 7 | 8 |

Date: 10/5/2022
 Project Name: PLATTSVILLE RELO CT
 Designed By: JC Checked By: MSC



WIND LOADS

Angle = 90 (deg) Ice Thickness = 1.14 in. Equivalent Angle = 270 (deg)

WIND LOADS WITH NO ICE:

| Appurtenances | Height | Width | Depth | Flat Area (normal) | Flat Area (side) | Ratio (normal) | Ratio (side) | Ca (normal) | Ca (side) | Force (lbs) | Force (lbs) | Force (lbs) |
|----------------------------|--------|-------|-------|-----------------------|---------------------|-------------------|-----------------|----------------|--------------|----------------|----------------|----------------|
| MX10FIT665-CC Antennas | 70.9 | 12.2 | 7.5 | 6.01 | 3.69 | 5.81 | 9.45 | 1.35 | 1.48 | 401 | 271 | 271 |
| MX10FIT645-XX Antennas | 70.9 | 15.0 | 7.4 | 7.39 | 3.64 | 4.73 | 9.58 | 1.30 | 1.49 | 476 | 269 | 269 |
| RF4439D-25A RRH | 15.0 | 15.0 | 10.0 | 1.56 | 1.04 | 1.00 | 1.50 | 1.20 | 1.20 | 93 | 62 | 62 |
| RF4439D-25A RRH (Shielded) | 15.0 | 0.0 | 10.0 | 0.00 | 1.04 | 0.00 | 1.50 | 1.20 | 1.20 | 0 | 62 | 62 |
| RF4440D-13A RRH | 15.0 | 15.0 | 8.1 | 1.56 | 0.84 | 1.00 | 1.85 | 1.20 | 1.20 | 98 | 50 | 50 |
| RT4401-48A RRH | 13.9 | 8.6 | 4.2 | 0.83 | 0.41 | 1.62 | 3.31 | 1.20 | 1.24 | 49 | 25 | 25 |
| RT4401-48A RRH (Shielded) | 13.9 | 0.0 | 4.2 | 0.00 | 0.41 | 0.00 | 3.31 | 1.20 | 1.24 | 0 | 25 | 25 |
| OVP Box | 28.9 | 15.7 | 10.3 | 3.15 | 2.07 | 1.84 | 2.81 | 1.20 | 1.21 | 188 | 124 | 124 |

WIND LOADS WITH ICE:

| | | | | | | | | | | | | |
|----------------------------|------|------|------|------|------|------|------|------|------|----|----|----|
| MX10FIT665-CC Antennas | 73.2 | 14.5 | 9.8 | 7.36 | 4.97 | 5.05 | 7.48 | 1.31 | 1.42 | 77 | 56 | 56 |
| MX10FIT645-XX Antennas | 73.2 | 17.3 | 9.7 | 8.78 | 4.92 | 4.24 | 7.56 | 1.28 | 1.42 | 89 | 55 | 55 |
| RF4439D-25A RRH | 17.3 | 17.3 | 12.3 | 2.07 | 1.47 | 1.00 | 1.41 | 1.20 | 1.20 | 20 | 14 | 14 |
| RF4439D-25A RRH (Shielded) | 17.3 | 2.3 | 12.3 | 0.27 | 1.47 | 7.58 | 1.41 | 1.42 | 1.20 | 3 | 14 | 14 |
| RF4440D-13A RRH | 17.3 | 17.3 | 10.4 | 2.07 | 1.25 | 1.00 | 1.66 | 1.20 | 1.20 | 20 | 12 | 12 |
| RT4401-48A RRH | 16.2 | 10.9 | 6.5 | 1.22 | 0.73 | 1.49 | 2.50 | 1.20 | 1.20 | 12 | 7 | 7 |
| RT4401-48A RRH (Shielded) | 16.2 | 2.3 | 6.5 | 0.26 | 0.73 | 7.10 | 2.50 | 1.40 | 1.20 | 3 | 7 | 7 |
| OVP Box | 31.2 | 18.0 | 12.6 | 3.89 | 2.72 | 1.73 | 2.48 | 1.20 | 1.20 | 37 | 26 | 26 |

WIND LOADS AT 30 MPH:

| | | | | | | | | | | | | |
|----------------------------|------|------|------|------|------|------|------|------|------|----|----|----|
| MX10FIT665-CC Antennas | 70.9 | 12.2 | 7.5 | 6.01 | 3.69 | 5.81 | 9.45 | 1.35 | 1.48 | 23 | 16 | 16 |
| MX10FIT645-XX Antennas | 70.9 | 15.0 | 7.4 | 7.39 | 3.64 | 4.73 | 9.58 | 1.30 | 1.49 | 27 | 15 | 15 |
| RF4439D-25A RRH | 15.0 | 15.0 | 10.0 | 1.56 | 1.04 | 1.00 | 1.50 | 1.20 | 1.20 | 5 | 4 | 4 |
| RF4439D-25A RRH (Shielded) | 15.0 | 0.0 | 10.0 | 0.00 | 1.04 | 0.00 | 1.50 | 1.20 | 1.20 | 0 | 4 | 4 |
| RF4440D-13A RRH | 15.0 | 15.0 | 8.1 | 1.56 | 0.84 | 1.00 | 1.85 | 1.20 | 1.20 | 5 | 3 | 3 |
| RT4401-48A RRH | 13.9 | 8.6 | 4.2 | 0.83 | 0.41 | 1.62 | 3.31 | 1.20 | 1.24 | 9 | 1 | 1 |
| RT4401-48A RRH (Shielded) | 13.9 | 0.0 | 4.2 | 0.00 | 0.41 | 0.00 | 3.31 | 1.20 | 1.24 | 0 | 1 | 1 |
| OVP Box | 28.9 | 15.7 | 10.3 | 3.15 | 2.07 | 1.84 | 2.81 | 1.20 | 1.21 | 11 | 7 | 7 |

Date: 10/5/2022
 Project Name: PLATTSVILLE RELO CT
 Designed By: JC Checked By: MSC



WIND LOADS

Angle = 120 (deg) Ice Thickness = 1.14 in. Equivalent Angle = 300 (deg)

WIND LOADS WITH NO ICE:

| Appurtenances | Height | Width | Depth | Flat Area (normal) | Flat Area (side) | Ratio (normal) | Ratio (side) | Ca (normal) | Ca (side) | Force (lbs) | Force (lbs) | Force (lbs) |
|----------------------------|--------|-------|-------|-----------------------|---------------------|-------------------|-----------------|----------------|--------------|----------------|----------------|----------------|
| MX10FIT665-CC Antennas | 70.9 | 12.2 | 7.5 | 6.01 | 3.69 | 5.81 | 9.45 | 1.35 | 1.48 | 401 | 271 | 304 |
| MX10FIT645-XX Antennas | 70.9 | 15.0 | 7.4 | 7.39 | 3.64 | 4.73 | 9.58 | 1.30 | 1.49 | 476 | 269 | 320 |
| RF4439D-25A RRH | 15.0 | 15.0 | 10.0 | 1.56 | 1.04 | 1.00 | 1.50 | 1.20 | 1.20 | 98 | 62 | 70 |
| RF4439D-25A RRH (Shielded) | 15.0 | 11.3 | 10.0 | 1.17 | 1.04 | 1.33 | 1.50 | 1.20 | 1.20 | 70 | 62 | 64 |
| RF4440D-13A RRH | 15.0 | 15.0 | 8.1 | 1.56 | 0.84 | 1.00 | 1.85 | 1.20 | 1.20 | 93 | 50 | 61 |
| RT4401-48A RRH | 13.9 | 8.6 | 4.2 | 0.83 | 0.41 | 1.62 | 3.31 | 1.20 | 1.24 | 40 | 25 | 31 |
| RT4401-48A RRH (Shielded) | 13.9 | 6.5 | 4.2 | 0.62 | 0.41 | 2.16 | 3.31 | 1.20 | 1.24 | 37 | 25 | 28 |
| OVP Box | 28.9 | 15.7 | 10.3 | 3.15 | 2.07 | 1.84 | 2.81 | 1.20 | 1.21 | 188 | 124 | 140 |

WIND LOADS WITH ICE:

| | | | | | | | | | | | | |
|----------------------------|------|------|------|------|------|------|------|------|------|----|----|----|
| MX10FIT665-CC Antennas | 73.2 | 14.5 | 9.8 | 7.36 | 4.97 | 5.05 | 7.48 | 1.31 | 1.42 | 77 | 56 | 61 |
| MX10FIT645-XX Antennas | 73.2 | 17.3 | 9.7 | 8.78 | 4.92 | 4.24 | 7.56 | 1.28 | 1.42 | 89 | 56 | 64 |
| RF4439D-25A RRH | 17.3 | 17.3 | 12.3 | 2.07 | 1.47 | 1.00 | 1.41 | 1.20 | 1.20 | 20 | 14 | 15 |
| RF4439D-25A RRH (Shielded) | 17.3 | 13.0 | 12.3 | 1.55 | 1.47 | 1.33 | 1.41 | 1.20 | 1.20 | 15 | 14 | 14 |
| RF4440D-13A RRH | 17.3 | 17.3 | 10.4 | 2.07 | 1.25 | 1.00 | 1.66 | 1.20 | 1.20 | 20 | 12 | 14 |
| RT4401-48A RRH | 16.2 | 10.9 | 6.5 | 1.22 | 0.73 | 1.49 | 2.50 | 1.20 | 1.20 | 12 | 7 | 8 |
| RT4401-48A RRH (Shielded) | 16.2 | 8.2 | 6.5 | 0.92 | 0.73 | 1.98 | 2.50 | 1.20 | 1.20 | 9 | 7 | 7 |
| OVP Box | 31.2 | 18.0 | 12.6 | 3.89 | 2.72 | 1.73 | 2.48 | 1.20 | 1.20 | 37 | 26 | 29 |

WIND LOADS AT 30 MPH:

| | | | | | | | | | | | | |
|----------------------------|------|------|------|------|------|------|------|------|------|----|----|----|
| MX10FIT665-CC Antennas | 70.9 | 12.2 | 7.5 | 6.01 | 3.69 | 5.81 | 9.45 | 1.35 | 1.48 | 23 | 16 | 18 |
| MX10FIT645-XX Antennas | 70.9 | 15.0 | 7.4 | 7.39 | 3.64 | 4.73 | 9.58 | 1.30 | 1.49 | 27 | 15 | 18 |
| RF4439D-25A RRH | 15.0 | 15.0 | 10.0 | 1.56 | 1.04 | 1.00 | 1.50 | 1.20 | 1.20 | 5 | 4 | 4 |
| RF4439D-25A RRH (Shielded) | 15.0 | 11.3 | 10.0 | 1.17 | 1.04 | 1.33 | 1.50 | 1.20 | 1.20 | 4 | 4 | 4 |
| RF4440D-13A RRH | 15.0 | 15.0 | 8.1 | 1.56 | 0.84 | 1.00 | 1.85 | 1.20 | 1.20 | 5 | 3 | 4 |
| RT4401-48A RRH | 13.9 | 8.6 | 4.2 | 0.83 | 0.41 | 1.62 | 3.31 | 1.20 | 1.24 | 3 | 1 | 2 |
| RT4401-48A RRH (Shielded) | 13.9 | 6.5 | 4.2 | 0.62 | 0.41 | 2.16 | 3.31 | 1.20 | 1.24 | 2 | 1 | 2 |
| OVP Box | 28.9 | 15.7 | 10.3 | 3.15 | 2.07 | 1.84 | 2.81 | 1.20 | 1.21 | 11 | 7 | 8 |

Date: 10/5/2022
 Project Name: PLATTSVILLE RELO CT
 Designed By: JC Checked By: MSC



WIND LOADS

Angle = 150 (deg) Ice Thickness = 1.14 in. Equivalent Angle = 330 (deg)

WIND LOADS WITH NO ICE:

| Appurtenances | Height | Width | Depth | Flat Area (normal) | Flat Area (side) | Ratio (normal) | Ratio (side) | Ca (normal) | Ca (side) | Force (lbs) | Force (lbs) | Force (lbs) |
|----------------------------|--------|-------|-------|-----------------------|---------------------|-------------------|-----------------|----------------|--------------|----------------|----------------|----------------|
| MX10FIT665-CC Antennas | 70.9 | 12.2 | 7.5 | 6.01 | 3.69 | 5.81 | 9.45 | 1.35 | 1.48 | 401 | 271 | 369 |
| MX10FIT645-XX Antennas | 70.9 | 15.0 | 7.4 | 7.39 | 3.64 | 4.73 | 9.58 | 1.30 | 1.49 | 476 | 269 | 424 |
| RF4439D-25A RRH | 15.0 | 15.0 | 10.0 | 1.56 | 1.04 | 1.00 | 1.50 | 1.20 | 1.20 | 99 | 62 | 85 |
| RF4439D-25A RRH (Shielded) | 15.0 | 7.5 | 10.0 | 0.78 | 1.04 | 2.00 | 1.50 | 1.20 | 1.20 | 47 | 62 | 50 |
| RF4440D-13A RRH | 15.0 | 15.0 | 8.1 | 1.56 | 0.84 | 1.00 | 1.85 | 1.20 | 1.20 | 93 | 50 | 82 |
| RT4401-48A RRH | 13.9 | 8.6 | 4.2 | 0.83 | 0.41 | 1.62 | 3.31 | 1.20 | 1.24 | 49 | 25 | 43 |
| RT4401-48A RRH (Shielded) | 13.9 | 4.3 | 4.2 | 0.42 | 0.41 | 3.23 | 3.31 | 1.23 | 1.24 | 25 | 25 | 25 |
| OVP Box | 28.9 | 15.7 | 10.3 | 3.15 | 2.07 | 1.84 | 2.81 | 1.20 | 1.21 | 188 | 124 | 172 |

WIND LOADS WITH ICE:

| | | | | | | | | | | | | |
|----------------------------|------|------|------|------|------|------|------|------|------|----|----|----|
| MX10FIT665-CC Antennas | 73.2 | 14.5 | 9.8 | 7.36 | 4.97 | 5.05 | 7.48 | 1.31 | 1.42 | 77 | 56 | 71 |
| MX10FIT645-XX Antennas | 73.2 | 17.3 | 9.7 | 8.78 | 4.92 | 4.24 | 7.56 | 1.28 | 1.42 | 89 | 55 | 81 |
| RF4439D-25A RRH | 17.3 | 17.3 | 12.3 | 2.07 | 1.47 | 1.00 | 1.41 | 1.20 | 1.20 | 20 | 14 | 18 |
| RF4439D-25A RRH (Shielded) | 17.3 | 8.6 | 12.3 | 1.04 | 1.47 | 2.00 | 1.41 | 1.20 | 1.20 | 10 | 14 | 11 |
| RF4440D-13A RRH | 17.3 | 17.3 | 10.4 | 2.07 | 1.25 | 1.00 | 1.66 | 1.20 | 1.20 | 20 | 12 | 18 |
| RT4401-48A RRH | 16.2 | 10.9 | 6.5 | 1.22 | 0.73 | 1.49 | 2.50 | 1.20 | 1.20 | 12 | 7 | 10 |
| RT4401-48A RRH (Shielded) | 16.2 | 5.4 | 6.5 | 0.61 | 0.73 | 2.97 | 2.50 | 1.22 | 1.20 | 6 | 7 | 6 |
| OVP Box | 31.2 | 18.0 | 12.6 | 3.89 | 2.72 | 1.73 | 2.48 | 1.20 | 1.20 | 37 | 26 | 34 |

WIND LOADS AT 30 MPH:

| | | | | | | | | | | | | |
|----------------------------|------|------|------|------|------|------|------|------|------|----|----|----|
| MX10FIT665-CC Antennas | 70.9 | 12.2 | 7.5 | 6.01 | 3.69 | 5.81 | 9.45 | 1.35 | 1.48 | 23 | 16 | 21 |
| MX10FIT645-XX Antennas | 70.9 | 15.0 | 7.4 | 7.39 | 3.64 | 4.73 | 9.58 | 1.30 | 1.49 | 27 | 15 | 24 |
| RF4439D-25A RRH | 15.0 | 15.0 | 10.0 | 1.56 | 1.04 | 1.00 | 1.50 | 1.20 | 1.20 | 5 | 4 | 5 |
| RF4439D-25A RRH (Shielded) | 15.0 | 7.5 | 10.0 | 0.78 | 1.04 | 2.00 | 1.50 | 1.20 | 1.20 | 3 | 4 | 3 |
| RF4440D-13A RRH | 15.0 | 15.0 | 8.1 | 1.56 | 0.84 | 1.00 | 1.85 | 1.20 | 1.20 | 5 | 3 | 5 |
| RT4401-48A RRH | 13.9 | 8.6 | 4.2 | 0.83 | 0.41 | 1.62 | 3.31 | 1.20 | 1.24 | 3 | 1 | 2 |
| RT4401-48A RRH (Shielded) | 13.9 | 4.3 | 4.2 | 0.42 | 0.41 | 3.23 | 3.31 | 1.23 | 1.24 | 1 | 1 | 1 |
| OVP Box | 28.9 | 15.7 | 10.3 | 3.15 | 2.07 | 1.84 | 2.81 | 1.20 | 1.21 | 11 | 7 | 10 |

Date: 9/30/2022

Project Name: PLATTSVILLE RELO CT

Designed By: JC Checked By: MSC



ICE WEIGHT CALCULATIONS

Thickness of ice: 1.14 in.
Density of ice: 56 pcf

MX10FIT665-CC Antenna

Weight of ice based on total radial SF area:
Height (in): 70.9
Width (in): 12.2
Depth (in): 7.5
Total weight of ice on object: 127 lbs
Weight of object: 53.0 lbs
Combined weight of ice and object: 180 lbs

MX10FIT645-XX Antenna

Weight of ice based on total radial SF area:
Height (in): 70.9
Width (in): 15.0
Depth (in): 7.4
Total weight of ice on object: 147 lbs
Weight of object: 53.0 lbs
Combined weight of ice and object: 200 lbs

RF4439D-25A RRH

Weight of ice based on total radial SF area:
Height (in): 15.0
Width (in): 15.0
Depth (in): 10.0
Total weight of ice on object: 33 lbs
Weight of object: 98.0 lbs
Combined weight of ice and object: 131 lbs

RF4440D-13A RRH

Weight of ice based on total radial SF area:
Height (in): 15.0
Width (in): 15.0
Depth (in): 8.1
Total weight of ice on object: 32 lbs
Weight of object: 82.0 lbs
Combined weight of ice and object: 114 lbs

RT4401-48A RRH

Weight of ice based on total radial SF area:
Height (in): 13.9
Width (in): 8.6
Depth (in): 4.2
Total weight of ice on object: 17 lbs
Weight of object: 19.0 lbs
Combined weight of ice and object: 36 lbs

OVP Box

Weight of ice based on total radial SF area:
Height (in): 28.9
Width (in): 15.7
Depth (in): 10.3
Total weight of ice on object: 67 lbs
Weight of object: 32.0 lbs
Combined weight of ice and object: 99 lbs

2" pipe

Per foot weight of ice:
diameter (in): 2.38
Per foot weight of ice on object: 5 plf

3-1/2" Pipe

Per foot weight of ice:
diameter (in): 4
Per foot weight of ice on object: 7 plf

HSS 4x4


Weight of ice based on total radial SF area:
Height (in): 4
Width (in): 4
Per foot weight of ice on object: 9 plf


L 4x4 Angles

Weight of ice based on total radial SF area:
Height (in): 4
Width (in): 4
Per foot weight of ice on object: 9 plf




**Mount Calculations
(Existing Conditions)**

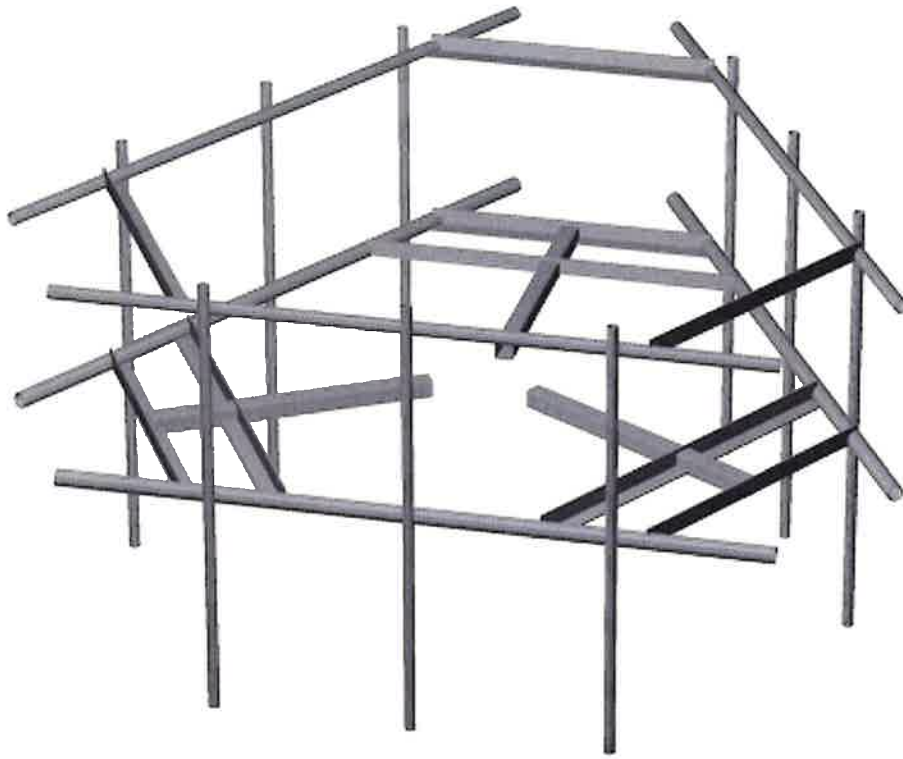


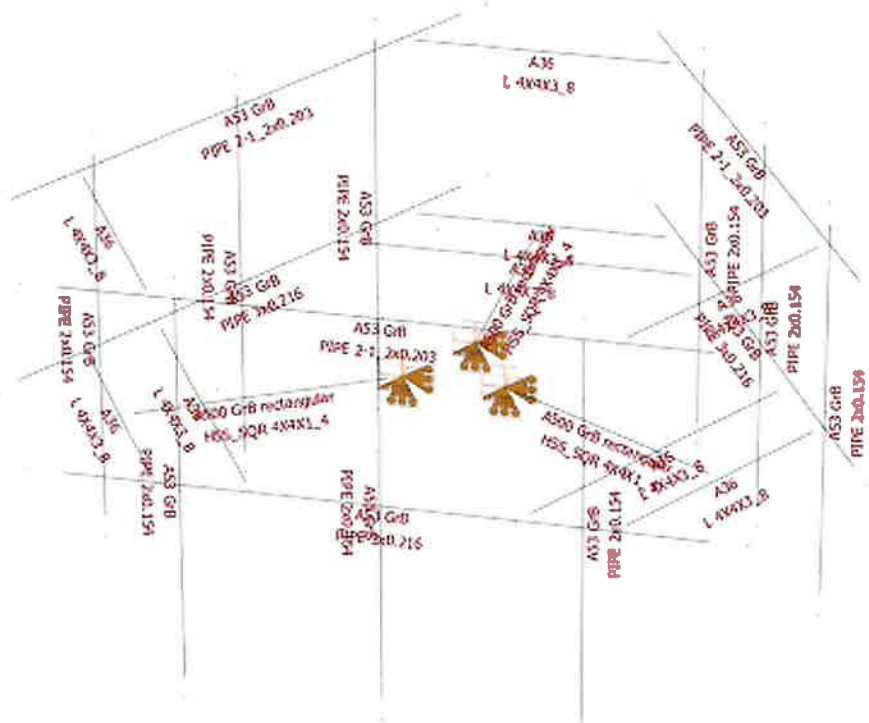

Design status

- Not designed
- Error on design
- Design O.K.
- With warnings

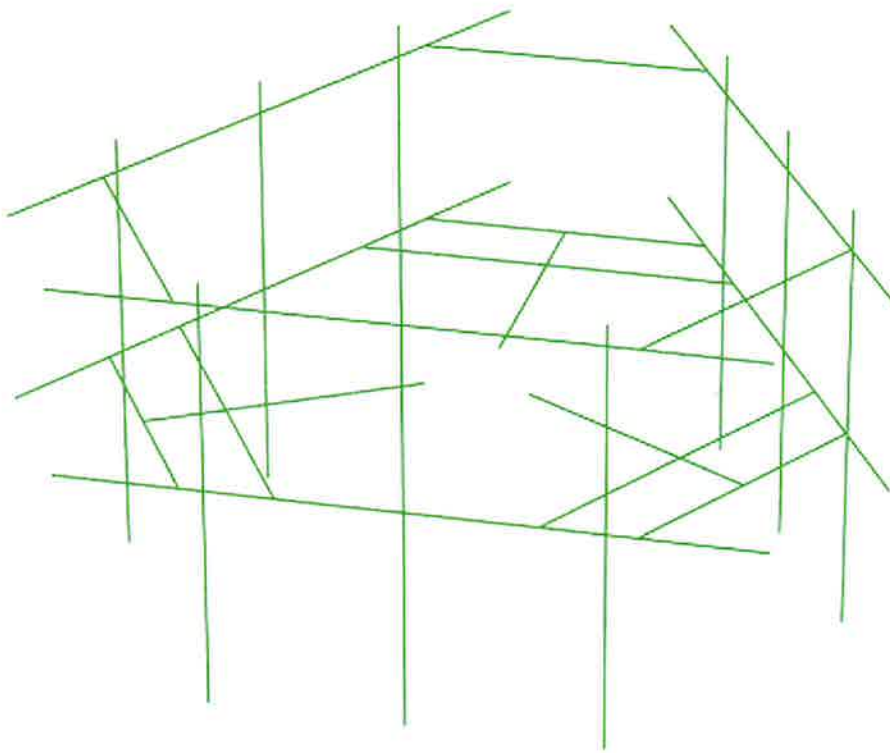

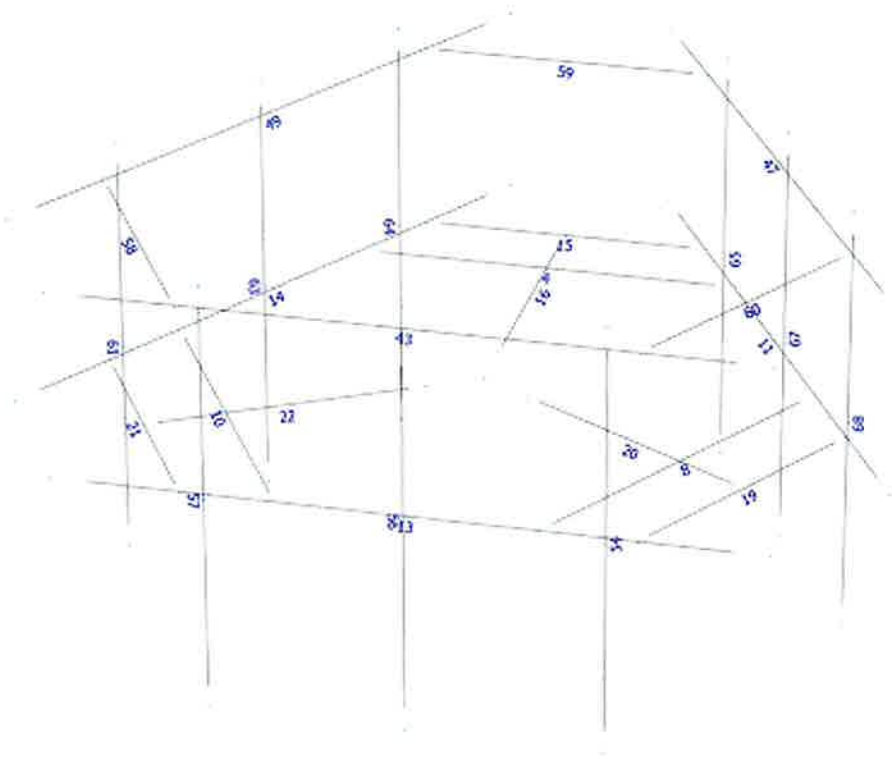

Load data


GLOSSARY

Comb : Indicates if load condition is a load combination

Load Conditions

| Condition | Description | Comb. | Category |
|-----------|----------------------------------|-------|----------|
| DL | Dead Load | No | DL |
| W0 | Wind Load 0/60/120 deg | No | WIND |
| W30 | Wind Load 30/90/150 deg | No | WIND |
| Di | Ice Load | No | LL |
| Wi0 | Ice Wind Load 0/60/120 deg | No | WIND |
| Wi30 | Ice Wind Load 30/90/150 deg | No | WIND |
| WL0 | WL 30 mph 0/60/120 deg | No | WIND |
| WL30 | WL 30 mph 30/90/150 deg | No | WIND |
| LL1 | 250 lb Live Load Center of Mount | No | LL |
| LL2 | 250 lb Live Load End of Mount | No | LL |
| LLa1 | 500 lb Live Load Antenna 1 | No | LL |
| LLa2 | 500 lb Live Load Antenna 2 | No | LL |
| LLa3 | 500 lb Live Load Antenna 3 | No | LL |


Distributed force on members



| Condition | Member | Dir1 | Val1 [Kip/ft] | Val2 [Kip/ft] | Dist1 [ft] | % | Dist2 [ft] | % |
|-----------|--------|--------|------------------|------------------|---------------|------|---------------|----|
| DL | 4 | y | -0.01 | 0.00 | 0.00 | No | 0.00 | No |
| | 8 | y | -0.01 | 0.00 | 0.00 | No | 0.00 | No |
| | 10 | y | -0.01 | 0.00 | 0.00 | No | 0.00 | No |
| | 15 | y | -0.01 | 0.00 | 0.00 | No | 0.00 | No |
| | 19 | y | -0.01 | 0.00 | 0.00 | No | 0.00 | No |
| | 21 | y | -0.01 | 0.00 | 0.00 | No | 0.00 | No |
| W0 | 4 | z | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 8 | z | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 10 | z | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 11 | z | -0.02 | 0.00 | 0.00 | No | 0.00 | No |
| | 13 | z | -0.02 | 0.00 | 0.00 | No | 0.00 | No |
| | 14 | z | -0.02 | 0.00 | 0.00 | No | 0.00 | No |
| | 15 | z | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 19 | z | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 20 | z | -0.021 | 0.00 | 0.00 | No | 0.00 | No |
| | 21 | z | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 22 | z | -0.021 | 0.00 | 0.00 | No | 0.00 | No |
| | 43 | z | -0.02 | 0.00 | 0.00 | No | 0.00 | No |
| | 47 | z | -0.02 | 0.00 | 0.00 | No | 0.00 | No |
| | 49 | z | -0.02 | 0.00 | 0.00 | No | 0.00 | No |
| | 54 | z | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| 56 | z | -0.012 | -0.012 | 0.00 | No | 1.50 | No | |
| | z | -0.012 | -0.012 | 6.50 | No | 8.00 | No | |
| | z | -0.012 | 0.00 | 0.00 | No | 0.00 | No | |

| | | | | | | | | |
|-----|----|---|--------|--------|------|----|------|----|
| | 58 | z | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 59 | z | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 60 | z | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 61 | z | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| | 63 | z | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| | 64 | z | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| | 65 | z | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| | 67 | z | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| W30 | 8 | x | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 10 | x | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 11 | x | -0.02 | 0.00 | 0.00 | No | 0.00 | No |
| | 14 | x | -0.02 | 0.00 | 0.00 | No | 0.00 | No |
| | 16 | x | -0.021 | 0.00 | 0.00 | No | 0.00 | No |
| | 19 | x | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 20 | x | -0.021 | 0.00 | 0.00 | No | 0.00 | No |
| | 21 | x | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 22 | x | -0.021 | 0.00 | 0.00 | No | 0.00 | No |
| | 47 | x | -0.02 | 0.00 | 0.00 | No | 0.00 | No |
| | 49 | x | -0.02 | 0.00 | 0.00 | No | 0.00 | No |
| | 54 | x | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| | 56 | x | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| | 57 | x | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| | 58 | x | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 60 | x | -0.033 | 0.00 | 0.00 | No | 0.00 | No |
| | 61 | x | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| | 63 | x | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| | 64 | x | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| | 65 | x | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| | 67 | x | -0.012 | -0.012 | 0.00 | No | 1.50 | No |
| | | x | -0.012 | -0.012 | 6.50 | No | 8.00 | No |
| | 68 | x | -0.012 | 0.00 | 0.00 | No | 0.00 | No |
| Di | 4 | y | -0.009 | 0.00 | 0.00 | No | 0.00 | No |
| | 8 | y | -0.009 | 0.00 | 0.00 | No | 0.00 | No |
| | 10 | y | -0.009 | 0.00 | 0.00 | No | 0.00 | No |
| | 11 | y | -0.007 | 0.00 | 0.00 | No | 0.00 | No |
| | 13 | y | -0.007 | 0.00 | 0.00 | No | 0.00 | No |
| | 14 | y | -0.007 | 0.00 | 0.00 | No | 0.00 | No |
| | 15 | y | -0.009 | 0.00 | 0.00 | No | 0.00 | No |
| | 16 | y | -0.009 | 0.00 | 0.00 | No | 0.00 | No |
| | 19 | y | -0.009 | 0.00 | 0.00 | No | 0.00 | No |
| | 20 | y | -0.009 | 0.00 | 0.00 | No | 0.00 | No |
| | 21 | y | -0.009 | 0.00 | 0.00 | No | 0.00 | No |
| | 22 | y | -0.009 | 0.00 | 0.00 | No | 0.00 | No |
| | 43 | y | -0.007 | 0.00 | 0.00 | No | 0.00 | No |
| | 47 | y | -0.007 | 0.00 | 0.00 | No | 0.00 | No |
| | 49 | y | -0.007 | 0.00 | 0.00 | No | 0.00 | No |
| | 54 | y | -0.005 | 0.00 | 0.00 | No | 0.00 | No |
| | 56 | y | -0.005 | 0.00 | 0.00 | No | 0.00 | No |
| | 57 | y | -0.005 | 0.00 | 0.00 | No | 0.00 | No |
| | 58 | y | -0.009 | 0.00 | 0.00 | No | 0.00 | No |
| | 59 | y | -0.009 | 0.00 | 0.00 | No | 0.00 | No |
| | 60 | y | -0.009 | 0.00 | 0.00 | No | 0.00 | No |
| | 61 | y | -0.005 | 0.00 | 0.00 | No | 0.00 | No |
| | 63 | y | -0.005 | 0.00 | 0.00 | No | 0.00 | No |
| | 64 | y | -0.005 | 0.00 | 0.00 | No | 0.00 | No |
| | 65 | y | -0.005 | 0.00 | 0.00 | No | 0.00 | No |
| | 67 | y | -0.005 | 0.00 | 0.00 | No | 0.00 | No |
| | 68 | y | -0.005 | 0.00 | 0.00 | No | 0.00 | No |

Concentrated forces on members



| Condition | Member | Dir1 | Value1 [Kip] | Dist1 [ft] | % | |
|-----------|--------|------|--------------|------------|------|----|
| DL | 54 | y | -0.032 | 2.50 | No | |
| | | y | -0.082 | 5.00 | No | |
| | 56 | y | -0.103 | 1.50 | No | |
| | | y | -0.103 | 6.50 | No | |
| | | y | -0.098 | 2.50 | No | |
| | | y | -0.019 | 5.00 | No | |
| | 61 | y | -0.082 | 2.50 | No | |
| | 63 | y | -0.103 | 1.50 | No | |
| | | y | -0.103 | 6.50 | No | |
| | | y | -0.098 | 2.50 | No | |
| | | y | -0.019 | 5.00 | No | |
| | 65 | y | -0.082 | 2.50 | No | |
| | 67 | y | -0.103 | 1.50 | No | |
| | | y | -0.103 | 6.50 | No | |
| | | y | -0.098 | 2.50 | No | |
| | | y | -0.019 | 5.00 | No | |
| | W0 | 54 | z | -0.188 | 2.50 | No |
| | | | z | -0.093 | 5.00 | No |
| 56 | | z | -0.476 | 1.50 | No | |
| | | z | -0.476 | 6.50 | No | |
| 61 | | z | -0.061 | 2.50 | No | |
| | | z | -0.304 | 1.50 | No | |
| 63 | | z | -0.304 | 6.50 | No | |
| | | z | -0.064 | 2.50 | No | |
| | | z | -0.028 | 5.00 | No | |
| | | z | -0.061 | 2.50 | No | |
| 65 | | z | -0.304 | 1.50 | No | |
| 67 | | z | -0.304 | 6.50 | No | |
| | | z | -0.064 | 2.50 | No | |
| | | z | -0.028 | 5.00 | No | |
| | | z | -0.028 | 5.00 | No | |
| W30 | | 54 | x | -0.124 | 2.50 | No |
| | | | x | -0.05 | 5.00 | No |
| | | 56 | x | -0.269 | 1.50 | No |
| | x | | -0.269 | 6.50 | No | |
| | | x | -0.062 | 2.50 | No | |
| | | x | -0.025 | 5.00 | No | |
| | 61 | x | -0.082 | 2.50 | No | |
| | 63 | x | -0.369 | 1.50 | No | |
| | | x | -0.369 | 6.50 | No | |
| | | x | -0.05 | 2.50 | No | |
| | | x | -0.025 | 5.00 | No | |
| | 65 | x | -0.082 | 2.50 | No | |
| | 67 | x | -0.369 | 1.50 | No | |
| | | x | -0.369 | 6.50 | No | |
| | | x | -0.05 | 2.50 | No | |
| | | x | -0.025 | 5.00 | No | |
| | Di | 54 | y | -0.067 | 2.50 | No |
| | | | y | -0.032 | 5.00 | No |
| 56 | | y | -0.147 | 1.50 | No | |
| | | y | -0.147 | 6.50 | No | |
| | | y | -0.033 | 2.50 | No | |
| | | y | -0.017 | 5.00 | No | |
| 61 | | y | -0.032 | 2.50 | No | |
| 63 | | y | -0.127 | 1.50 | No | |
| | | y | -0.127 | 6.50 | No | |
| | | y | -0.033 | 2.50 | No | |
| | | y | -0.017 | 5.00 | No | |
| 65 | | y | -0.032 | 2.50 | No | |
| 67 | | y | -0.127 | 1.50 | No | |
| | | y | -0.127 | 6.50 | No | |
| | | y | -0.033 | 2.50 | No | |

| | | | | | |
|------|----|--------|--------|-------|----|
| Wi0 | 54 | y | -0.017 | 5.00 | No |
| | | z | -0.037 | 2.50 | No |
| | | z | -0.02 | 5.00 | No |
| | 56 | z | -0.091 | 1.50 | No |
| | | z | -0.091 | 6.50 | No |
| | | z | -0.003 | 2.50 | No |
| | 61 | z | -0.002 | 5.00 | No |
| | | z | -0.014 | 2.50 | No |
| | | z | -0.014 | 2.50 | No |
| | 63 | z | -0.061 | 1.50 | No |
| | | z | -0.061 | 6.50 | No |
| | | z | -0.014 | 2.50 | No |
| | 65 | z | -0.007 | 5.00 | No |
| | | z | -0.014 | 2.50 | No |
| | | z | -0.014 | 2.50 | No |
| 67 | z | -0.061 | 1.50 | No | |
| | z | -0.061 | 6.50 | No | |
| | z | -0.014 | 2.50 | No | |
| Wi30 | 54 | x | -0.026 | 2.50 | No |
| | | x | -0.012 | 5.00 | No |
| | | x | -0.012 | 5.00 | No |
| | 56 | x | -0.055 | 1.50 | No |
| | | x | -0.055 | 6.50 | No |
| | | x | -0.014 | 2.50 | No |
| | 61 | x | -0.007 | 5.00 | No |
| | | x | -0.018 | 2.50 | No |
| | | x | -0.018 | 2.50 | No |
| | 63 | x | -0.071 | 1.50 | No |
| | | x | -0.071 | 6.50 | No |
| | | x | -0.011 | 2.50 | No |
| | 65 | x | -0.006 | 5.00 | No |
| | | x | -0.018 | 2.50 | No |
| | | x | -0.018 | 2.50 | No |
| 67 | x | -0.071 | 1.50 | No | |
| | x | -0.071 | 6.50 | No | |
| | x | -0.011 | 2.50 | No | |
| WLO | 54 | z | -0.006 | 5.00 | No |
| | | z | -0.011 | 2.50 | No |
| | | z | -0.005 | 5.00 | No |
| | 56 | z | -0.027 | 1.50 | No |
| | | z | -0.027 | 6.50 | No |
| | | z | -0.027 | 6.50 | No |
| | 61 | z | -0.004 | 2.50 | No |
| | | z | -0.018 | 1.50 | No |
| | | z | -0.018 | 6.50 | No |
| | 63 | z | -0.018 | 6.50 | No |
| | | z | -0.004 | 2.50 | No |
| | | z | -0.002 | 5.00 | No |
| | 65 | z | -0.004 | 2.50 | No |
| | | z | -0.018 | 1.50 | No |
| | | z | -0.018 | 6.50 | No |
| 67 | z | -0.018 | 6.50 | No | |
| | z | -0.004 | 2.50 | No | |
| | z | -0.002 | 5.00 | No | |
| WL30 | 54 | x | -0.007 | 2.50 | No |
| | | x | -0.003 | 5.00 | No |
| | | x | -0.003 | 5.00 | No |
| | 56 | x | -0.015 | 1.50 | No |
| | | x | -0.015 | 6.50 | No |
| | | x | -0.004 | 2.50 | No |
| | 61 | x | -0.001 | 5.00 | No |
| | | x | -0.005 | 2.50 | No |
| | | x | -0.005 | 2.50 | No |
| | 63 | x | -0.021 | 1.50 | No |
| | | x | -0.021 | 6.50 | No |
| | | x | -0.003 | 2.50 | No |
| | 65 | x | -0.001 | 5.00 | No |
| | | x | -0.005 | 2.50 | No |
| | | x | -0.021 | 1.50 | No |
| 67 | x | -0.021 | 6.50 | No | |
| | x | -0.021 | 6.50 | No | |
| | x | -0.003 | 2.50 | No | |
| LL1 | 43 | y | -0.25 | 6.25 | No |
| | | y | -0.25 | 12.50 | No |
| | | y | -0.25 | 12.50 | No |
| LLa1 | 54 | y | -0.50 | 4.00 | No |

| | | | | | |
|------|----|---|-------|------|----|
| LLa2 | 56 | y | -0.50 | 4.00 | No |
| LLa3 | 57 | y | -0.50 | 4.00 | No |

Self weight multipliers for load conditions

| Condition | Description | Self weight multiplier | | | |
|-----------|----------------------------------|------------------------|-------|-------|-------|
| | | Comb. | MultX | MultY | MultZ |
| DL | Dead Load | No | 0.00 | -1.00 | 0.00 |
| W0 | Wind Load 0/60/120 deg | No | 0.00 | 0.00 | 0.00 |
| W30 | Wind Load 30/90/150 deg | No | 0.00 | 0.00 | 0.00 |
| Di | Ice Load | No | 0.00 | 0.00 | 0.00 |
| Wi0 | Ice Wind Load 0/60/120 deg | No | 0.00 | 0.00 | 0.00 |
| Wi30 | Ice Wind Load 30/90/150 deg | No | 0.00 | 0.00 | 0.00 |
| WL0 | WL 30 mph 0/60/120 deg | No | 0.00 | 0.00 | 0.00 |
| WL30 | WL 30 mph 30/90/150 deg | No | 0.00 | 0.00 | 0.00 |
| LL1 | 250 lb Live Load Center of Mount | No | 0.00 | 0.00 | 0.00 |
| LL2 | 250 lb Live Load End of Mount | No | 0.00 | 0.00 | 0.00 |
| LLa1 | 500 lb Live Load Antenna 1 | No | 0.00 | 0.00 | 0.00 |
| LLa2 | 500 lb Live Load Antenna 2 | No | 0.00 | 0.00 | 0.00 |
| LLa3 | 500 lb Live Load Antenna 3 | No | 0.00 | 0.00 | 0.00 |

Earthquake (Dynamic analysis only)

| Condition | a/g | Ang. [Deg] | Damp. [%] |
|-----------|------|---------------|--------------|
| DL | 0.00 | 0.00 | 0.00 |
| W0 | 0.00 | 0.00 | 0.00 |
| W30 | 0.00 | 0.00 | 0.00 |
| Di | 0.00 | 0.00 | 0.00 |
| Wi0 | 0.00 | 0.00 | 0.00 |
| Wi30 | 0.00 | 0.00 | 0.00 |
| WL0 | 0.00 | 0.00 | 0.00 |
| WL30 | 0.00 | 0.00 | 0.00 |
| LL1 | 0.00 | 0.00 | 0.00 |
| LL2 | 0.00 | 0.00 | 0.00 |
| LLa1 | 0.00 | 0.00 | 0.00 |
| LLa2 | 0.00 | 0.00 | 0.00 |
| LLa3 | 0.00 | 0.00 | 0.00 |

Steel Code Check

Report: Summary - Group by member

Load conditions to be included in design :

- LC1=1.2DL+W0
- LC2=1.2DL+W30
- LC3=1.2DL-W0
- LC4=1.2DL-W30
- LC5=0.9DL+W0
- LC6=0.9DL+W30
- LC7=0.9DL-W0
- LC8=0.9DL-W30
- LC9=1.2DL+Di+W0
- LC10=1.2DL+Di+W30
- LC11=1.2DL+Di-W0
- LC12=1.2DL+Di-W30
- LC13=1.4DL
- LC14=1.2DL+1.6LL1
- LC15=1.2DL+1.6LL2
- LC16=1.2DL+W0+1.6LLa1
- LC17=1.2DL+W30+1.6LLa1
- LC18=1.2DL-W0+1.6LLa1
- LC19=1.2DL-W30+1.6LLa1
- LC20=1.2DL+W0+1.6LLa2
- LC21=1.2DL+W30+1.6LLa2
- LC22=1.2DL-W0+1.6LLa2
- LC23=1.2DL-W30+1.6LLa2
- LC24=1.2DL+W0+1.6LLa3
- LC25=1.2DL+W30+1.6LLa3
- LC26=1.2DL-W0+1.6LLa3
- LC27=1.2DL-W30+1.6LLa3

| Description | Section | Member | Ctrl Eq. | Ratio | Status | Reference |
|-------------|-------------------------|-----------|-----------------|-------------|-----------|-----------|
| | HSS_SQR 4X4X1_4 | 16 | LC12 at 100.00% | 0.41 | OK | Eq. H1-1b |
| | | 20 | LC3 at 100.00% | 0.48 | OK | Eq. H1-1b |
| | | 22 | LC24 at 100.00% | 0.46 | OK | Eq. H1-1b |
| | L 4X4X3_8 | 4 | LC9 at 50.00% | 0.51 | OK | Sec. F1 |
| | | 8 | LC12 at 50.00% | 0.54 | OK | Sec. F1 |
| | | 10 | LC11 at 50.00% | 0.54 | OK | Sec. F1 |
| | | 15 | LC3 at 50.00% | 0.25 | OK | Eq. H2-1 |
| | | 19 | LC2 at 50.00% | 0.23 | OK | Eq. H2-1 |
| | | 21 | LC4 at 46.88% | 0.21 | OK | Eq. H2-1 |
| | | 58 | LC3 at 100.00% | 0.07 | OK | Eq. H2-1 |
| | | 59 | LC2 at 0.00% | 0.07 | OK | Sec. F1 |
| | | 60 | LC15 at 0.00% | 0.11 | OK | Eq. H2-1 |
| | PIPE 2-1_2x0.203 | 43 | LC15 at 78.13% | 0.26 | OK | Eq. H1-1b |
| | | 47 | LC4 at 50.00% | 0.11 | OK | Eq. H1-1b |
| | | 49 | LC1 at 22.92% | 0.12 | OK | Eq. H1-1b |
| | PIPE 2x0.154 | 54 | LC1 at 47.92% | 0.29 | OK | Eq. H1-1b |
| | | 56 | LC3 at 50.00% | 0.67 | OK | Eq. H1-1b |
| | | 57 | LC1 at 47.92% | 0.23 | OK | Eq. H1-1b |
| | | 61 | LC3 at 47.92% | 0.31 | OK | Eq. H1-1b |
| | | 63 | LC2 at 50.00% | 0.56 | OK | Eq. H1-1b |
| | | 64 | LC2 at 47.92% | 0.24 | OK | Eq. H1-1b |
| | | 65 | LC2 at 47.92% | 0.27 | OK | Eq. H1-1b |
| | | 67 | LC4 at 50.00% | 0.54 | OK | Eq. H1-1b |
| 68 | LC3 at 47.92% | 0.28 | OK | Eq. H1-1b | | |
| | PIPE 3x0.216 | 11 | LC4 at 31.25% | 0.31 | OK | Eq. H1-1b |

| | | | | |
|-----------|---------------|-------------|-----------|-----------|
| 13 | LC3 at 68.75% | 0.30 | OK | Eq. H1-1b |
| 14 | LC2 at 68.75% | 0.31 | OK | Eq. H1-1b |

Geometry data

GLOSSARY

| | |
|------------|--|
| Cb22, Cb33 | : Moment gradient coefficients |
| Cm22, Cm33 | : Coefficients applied to bending term in interaction formula |
| d0 | : Tapered member section depth at J end of member |
| DJX | : Rigid end offset distance measured from J node in axis X |
| DJY | : Rigid end offset distance measured from J node in axis Y |
| DJZ | : Rigid end offset distance measured from J node in axis Z |
| DKX | : Rigid end offset distance measured from K node in axis X |
| DKY | : Rigid end offset distance measured from K node in axis Y |
| DKZ | : Rigid end offset distance measured from K node in axis Z |
| dL | : Tapered member section depth at K end of member |
| Ig factor | : Inertia reduction factor (Effective Inertia/Gross Inertia) for reinforced concrete members |
| K22 | : Effective length factor about axis 2 |
| K33 | : Effective length factor about axis 3 |
| L22 | : Member length for calculation of axial capacity |
| L33 | : Member length for calculation of axial capacity |
| LB pos | : Lateral unbraced length of the compression flange in the positive side of local axis 2 |
| LB neg | : Lateral unbraced length of the compression flange in the negative side of local axis 2 |
| RX | : Rotation about X |
| RY | : Rotation about Y |
| RZ | : Rotation about Z |
| TO | : 1 = Tension only member 0 = Normal member |
| TX | : Translation in X |
| TY | : Translation in Y |
| TZ | : Translation in Z |

Nodes

| Node | X [ft] | Y [ft] | Z [ft] | Rigid Floor |
|------|-----------|-----------|-----------|-------------|
| 56 | 0.9278 | 0.00 | 0.5356 | 0 |
| 19 | 0.00 | 0.00 | -1.0713 | 0 |
| 60 | -0.9278 | 0.00 | 0.5356 | 0 |
| 1 | 0.00 | 0.00 | 0.00 | 0 |
| 3 | 0.00 | 0.00 | -4.6713 | 0 |
| 7 | -3.50 | 0.00 | -4.6713 | 0 |
| 8 | 3.50 | 0.00 | -4.6713 | 0 |
| 15 | 4.0455 | 0.00 | 2.3357 | 0 |
| 17 | 5.7955 | 0.00 | -0.6954 | 0 |
| 18 | 2.2955 | 0.00 | 5.3667 | 0 |
| 20 | -4.0455 | 0.00 | 2.3357 | 0 |
| 22 | -2.2955 | 0.00 | 5.3667 | 0 |
| 23 | -5.7955 | 0.00 | -0.6954 | 0 |
| 24 | 1.5225 | 0.00 | -8.0964 | 0 |
| 25 | 7.773 | 0.00 | 2.7297 | 0 |
| 28 | -6.2505 | 0.00 | 5.3667 | 0 |
| 29 | 6.2505 | 0.00 | 5.3667 | 0 |
| 30 | -1.5225 | 0.00 | -8.0964 | 0 |
| 31 | -7.773 | 0.00 | 2.7297 | 0 |
| 39 | -2.6525 | 0.00 | -6.1392 | 0 |
| 47 | 2.6525 | 0.00 | -6.1392 | 0 |
| 48 | 0.00 | 0.00 | -6.1392 | 0 |
| 53 | 3.9905 | 0.00 | 5.3667 | 0 |
| 54 | 5.3167 | 0.00 | 3.0696 | 0 |
| 55 | 6.643 | 0.00 | 0.7725 | 0 |
| 57 | -6.643 | 0.00 | 0.7725 | 0 |
| 58 | -5.3167 | 0.00 | 3.0696 | 0 |
| 59 | -3.9905 | 0.00 | 5.3667 | 0 |
| 63 | -4.6477 | 0.00 | -2.6834 | 0 |

| | | | | |
|-----|---------|-------|---------|---|
| 64 | -2.9025 | 0.00 | -5.7062 | 0 |
| 65 | -6.393 | 0.00 | 0.3395 | 0 |
| 66 | -3.0757 | 0.00 | -5.8062 | 0 |
| 68 | -4.8209 | 0.00 | -2.7834 | 0 |
| 69 | -6.5662 | 0.00 | 0.2395 | 0 |
| 78 | 6.393 | 0.00 | 0.3395 | 0 |
| 79 | 6.5662 | 0.00 | 0.2395 | 0 |
| 81 | 4.6477 | 0.00 | -2.6834 | 0 |
| 83 | 4.8209 | 0.00 | -2.7834 | 0 |
| 84 | 2.9025 | 0.00 | -5.7062 | 0 |
| 85 | 3.0757 | 0.00 | -5.8062 | 0 |
| 86 | -3.4905 | 0.00 | 5.3667 | 0 |
| 87 | -3.4905 | 0.00 | 5.5667 | 0 |
| 89 | 0.00 | 0.00 | 5.3667 | 0 |
| 91 | 0.00 | 0.00 | 5.5667 | 0 |
| 92 | 3.4905 | 0.00 | 5.3667 | 0 |
| 93 | 3.4905 | 0.00 | 5.5667 | 0 |
| 94 | -3.4905 | 3.50 | 5.3667 | 0 |
| 95 | -3.4905 | 3.50 | 5.5667 | 0 |
| 97 | 0.00 | 3.50 | 5.3667 | 0 |
| 99 | 0.00 | 3.50 | 5.5667 | 0 |
| 100 | 3.4905 | 3.50 | 5.3667 | 0 |
| 101 | 3.4905 | 3.50 | 5.5667 | 0 |
| 102 | -6.2505 | 3.50 | 5.3667 | 0 |
| 103 | 6.2505 | 3.50 | 5.3667 | 0 |
| 104 | 7.773 | 3.50 | 2.7297 | 0 |
| 105 | 6.393 | 3.50 | 0.3395 | 0 |
| 106 | 6.5662 | 3.50 | 0.2395 | 0 |
| 108 | 4.6477 | 3.50 | -2.6834 | 0 |
| 110 | 4.8209 | 3.50 | -2.7834 | 0 |
| 111 | 2.9025 | 3.50 | -5.7062 | 0 |
| 112 | 3.0757 | 3.50 | -5.8062 | 0 |
| 113 | 1.5225 | 3.50 | -8.0964 | 0 |
| 114 | -1.5225 | 3.50 | -8.0964 | 0 |
| 115 | -2.9025 | 3.50 | -5.7062 | 0 |
| 116 | -3.0757 | 3.50 | -5.8062 | 0 |
| 118 | -4.6477 | 3.50 | -2.6834 | 0 |
| 120 | -4.8209 | 3.50 | -2.7834 | 0 |
| 121 | -6.393 | 3.50 | 0.3395 | 0 |
| 122 | -6.5662 | 3.50 | 0.2395 | 0 |
| 123 | -7.773 | 3.50 | 2.7297 | 0 |
| 124 | 3.4905 | 4.00 | 5.5667 | 0 |
| 126 | 0.00 | 4.00 | 5.5667 | 0 |
| 127 | -3.4905 | 4.00 | 5.5667 | 0 |
| 128 | -3.4905 | -4.00 | 5.5667 | 0 |
| 129 | 0.00 | -4.00 | 5.5667 | 0 |
| 131 | 3.4905 | -4.00 | 5.5667 | 0 |
| 132 | -3.9905 | 3.50 | 5.3667 | 0 |
| 133 | -6.643 | 3.50 | 0.7725 | 0 |
| 134 | -2.6525 | 3.50 | -6.1392 | 0 |
| 135 | 2.6525 | 3.50 | -6.1392 | 0 |
| 136 | 6.643 | 3.50 | 0.7725 | 0 |
| 137 | 3.9905 | 3.50 | 5.3667 | 0 |
| 138 | -3.0757 | 4.00 | -5.8062 | 0 |
| 139 | -4.8209 | 4.00 | -2.7834 | 0 |
| 141 | -6.5662 | 4.00 | 0.2395 | 0 |
| 142 | -3.0757 | -4.00 | -5.8062 | 0 |
| 143 | -4.8209 | -4.00 | -2.7834 | 0 |
| 145 | -6.5662 | -4.00 | 0.2395 | 0 |
| 146 | 6.5662 | 4.00 | 0.2395 | 0 |
| 148 | 4.8209 | 4.00 | -2.7834 | 0 |
| 149 | 3.0757 | 4.00 | -5.8062 | 0 |
| 150 | 6.5662 | -4.00 | 0.2395 | 0 |
| 152 | 4.8209 | -4.00 | -2.7834 | 0 |
| 153 | 3.0757 | -4.00 | -5.8062 | 0 |

Restraints

| Node | TX | TY | TZ | RX | RY | RZ |
|------|----|----|----|----|----|----|
| 56 | 1 | 1 | 1 | 1 | 1 | 1 |
| 19 | 1 | 1 | 1 | 1 | 1 | 1 |
| 60 | 1 | 1 | 1 | 1 | 1 | 1 |

Members

| Member | NJ | NK | Description | Section | Material | d0 [in] | dL [in] | Ig factor |
|--------|-----|-----|-------------|------------------|----------------------|------------|------------|-----------|
| 4 | 8 | 7 | | L 4X4X3_8 | A36 | 0.00 | 0.00 | 0.00 |
| 8 | 18 | 17 | | L 4X4X3_8 | A36 | 0.00 | 0.00 | 0.00 |
| 10 | 23 | 22 | | L 4X4X3_8 | A36 | 0.00 | 0.00 | 0.00 |
| 11 | 25 | 24 | | PIPE 3x0.216 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 13 | 28 | 29 | | PIPE 3x0.216 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 14 | 30 | 31 | | PIPE 3x0.216 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 15 | 47 | 39 | | L 4X4X3_8 | A36 | 0.00 | 0.00 | 0.00 |
| 16 | 48 | 19 | | HSS_SQR 4X4X1_4 | A500 GrB rectangular | 0.00 | 0.00 | 0.00 |
| 19 | 53 | 55 | | L 4X4X3_8 | A36 | 0.00 | 0.00 | 0.00 |
| 20 | 54 | 56 | | HSS_SQR 4X4X1_4 | A500 GrB rectangular | 0.00 | 0.00 | 0.00 |
| 21 | 57 | 59 | | L 4X4X3_8 | A36 | 0.00 | 0.00 | 0.00 |
| 22 | 58 | 60 | | HSS_SQR 4X4X1_4 | A500 GrB rectangular | 0.00 | 0.00 | 0.00 |
| 43 | 102 | 103 | | PIPE 2-1_2x0.203 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 47 | 104 | 113 | | PIPE 2-1_2x0.203 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 49 | 114 | 123 | | PIPE 2-1_2x0.203 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 54 | 124 | 131 | | PIPE 2x0.154 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 56 | 126 | 129 | | PIPE 2x0.154 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 57 | 127 | 128 | | PIPE 2x0.154 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 58 | 133 | 132 | | L 4X4X3_8 | A36 | 0.00 | 0.00 | 0.00 |
| 59 | 135 | 134 | | L 4X4X3_8 | A36 | 0.00 | 0.00 | 0.00 |
| 60 | 137 | 136 | | L 4X4X3_8 | A36 | 0.00 | 0.00 | 0.00 |
| 61 | 141 | 145 | | PIPE 2x0.154 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 63 | 139 | 143 | | PIPE 2x0.154 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 64 | 138 | 142 | | PIPE 2x0.154 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 65 | 149 | 153 | | PIPE 2x0.154 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 67 | 148 | 152 | | PIPE 2x0.154 | A53 GrB | 0.00 | 0.00 | 0.00 |
| 68 | 146 | 150 | | PIPE 2x0.154 | A53 GrB | 0.00 | 0.00 | 0.00 |

Orientation of local axes

| Member | Rotation [Deg] | Axis23 | NX | NY | NZ |
|--------|-------------------|--------|-------|------|------|
| 15 | 270.00 | 0 | 0.00 | 0.00 | 0.00 |
| 19 | 270.00 | 0 | 0.00 | 0.00 | 0.00 |
| 21 | 270.00 | 0 | 0.00 | 0.00 | 0.00 |
| 54 | 0.00 | 2 | -1.00 | 0.00 | 0.00 |
| 56 | 0.00 | 2 | -1.00 | 0.00 | 0.00 |
| 57 | 0.00 | 2 | -1.00 | 0.00 | 0.00 |
| 58 | 270.00 | 0 | 0.00 | 0.00 | 0.00 |
| 59 | 270.00 | 0 | 0.00 | 0.00 | 0.00 |
| 60 | 270.00 | 0 | 0.00 | 0.00 | 0.00 |
| 61 | 0.00 | 2 | -1.00 | 0.00 | 0.00 |
| 63 | 0.00 | 2 | -1.00 | 0.00 | 0.00 |
| 64 | 0.00 | 2 | -1.00 | 0.00 | 0.00 |
| 65 | 0.00 | 2 | -1.00 | 0.00 | 0.00 |
| 67 | 0.00 | 2 | -1.00 | 0.00 | 0.00 |
| 68 | 0.00 | 2 | -1.00 | 0.00 | 0.00 |

(REVISED)
STRUCTURAL ANALYSIS REPORT

For

PLATTSVILLE RELO CT

5151 Park Avenue
Fairfield, CT 06825

**Antennas Mounted on the
Temporary Ballasted Monopole**

117'-6" Temporary Ballasted Monopole

Prepared for:

verizon✓

118 Flanders Road
Westborough, MA 01581

Dated: September 12, 2022 (Rev. 2)

November 18, 2021 (Rev.1)

November 4, 2021

Prepared by:

HGD **HUDSON**
Design Group LLC

45 Beechwood Drive
North Andover, MA 01845
(P) 978.557.5553 (F) 978.336.5586

www.hudsondesigngroupllc.com



SCOPE OF WORK:

Hudson Design Group LLC (HDG) has been authorized by Verizon to conduct a structural evaluation of the existing 117'-6" temporary ballasted monopole supporting the proposed Verizon's antennas located at elevation 121'-7" above the ground level that is being relocated to 5151 Park Avenue Fairfield, CT. This analysis is to confirm that the existing tower and base structure with the new location and loading is in conformance with the original tower analysis and drawings referenced below.

This report represents this office's findings, conclusions and recommendations pertaining to the support of Verizon's existing and proposed antennas listed below.

The following documents were used for our reference:

- Temporary Monopole Design Drawings prepared by Ambor Structures dated June 29, 2015.
- Non-Penetrating Foundation Drawings prepared by Ambor Structures dated July 16, 2015.

CONCLUSION SUMMARY:

Based on our evaluation, we have determined that the existing tower **is in conformance** with the ANSI/TIA-222-H Standard for the loading considered under the criteria listed in this report. **The tower structure is rated at 94.9% - (Pole Section-L3 from EL.85.428' to EL.105.428' Controlling).**

FOUNDATION SUMMARY:

Based on our evaluation, we have determined that the existing foundation **is in conformance** with the ANSI/TIA-222-H Standard for the loading considered under the criteria listed in this report.

- Per the Non-Penetrating Foundation Design Drawings (6) 2 ft x 2 ft x 6 ft concrete waste blocks per sector (typ. of 12 sectors, total of 72 blocks) each weighing a minimum of 3600 lbs are required to achieve its overturning capacity of 2500 ft-kips.

HDG recommends the following prior to installation:

1. Stripping topsoil and fill to provide a minimum 2-foot-thick layer of compacted structural fill or ¾-inch crushed stone base course. Crushed stone (if used) should be separated from the fill subgrade and excavation sidewalls using a non-woven geotextile fabric, such as Mirafi 140N or equal, to prevent stone from punching into the fill subgrade.
2. Prior to placing the base course, the existing fill subgrade should be proof-rolled with multiple passes of a minimum 5-ton vibratory roller. The subgrade should be firm and unyielding. If soft or unstable areas are identified, they should be evaluated by the geotechnical engineer to evaluate suitability or to further evaluate the extent of potential over-excavation and replacement needed to achieve a stable subgrade.
3. Once the subgrade has been properly prepared, the base course layer can be placed to achieve design foundation elevation. If a well-graded structural fill is used, it should be placed in maximum 12-inch-thick loose lifts (for vibratory rollers) or 6-inch-thick loose lifts (large plate compactors) and compacted to at least 95% of the maximum dry density as determined by ASTM D 1557. Crushed stone, if used, should be placed in similar lift thicknesses, and chinked/compacted using multiple passes of a vibratory roller or large plate compactor.

APPURTENANCES CONFIGURATION:

| Tenant | Appurtenances | Elev. | Mount |
|----------|--|---------|------------------------|
| | 4' Lightning Rod | 127'-5" | Top of Monopole |
| Verizon | (4) MX10FIT665-CC Antennas | 121'-7" | Platform |
| Verizon | (2) MX10FIT645-XX Antennas | 121'-7" | Platform |
| Verizon | (4) RF4439d-25A RRH's | 121'-7" | Platform |
| Verizon | (4) RF4440d-13A RRH's | 121'-7" | Platform |
| Verizon | (4) RT4401-48A RRH's | 121'-7" | Platform |
| Verizon | (2) SDX1926Q-43 Diplexers | 121'-7" | Platform |
| Verizon | (1) OVP Box | 121'-7" | Platform |
| AT&T | (6) TPA65R-BU8DA-K Antennas | 110' | Sector Frame |
| AT&T | (3) 4449 B5/B12 RRH's | 110' | Sector Frame |
| AT&T | (3) B2/B66A 8843 RRH's | 110' | Sector Frame |
| AT&T | (3) 4415 B30 RRH's | 110' | Sector Frame |
| AT&T | (1) Squid Surge Arrestor | 110' | Sector Frame |
| T-Mobile | (3) APXVAALL24_43-U-NA20 Antennas | 90' | Platform |
| T-Mobile | (3) AIR6449 B41 Antennas | 90' | Platform |
| T-Mobile | (3) 4480 B71+B85 RRH's | 90' | Platform |
| T-Mobile | (3) 4460 B25+B66 RRH's | 90' | Platform |

**Proposed Appurtenances shown in Bold.*

VERIZON PROPOSED COAX CABLES:

| Tenant | Coax Cables | Elev. | Mount |
|---------|--------------------------------|---------|-----------------|
| Verizon | (1) 12x24 Hybrld Cables | 121'-7" | Inside Monopole |

**Proposed Verizon Coax Cables shown in Bold.*

ANALYSIS RESULTS SUMMARY:

| Component | Max. Stress Ratio | Elev. of Component (ft) | Pass/Fail | Comments |
|--------------------------|-------------------|-------------------------|-----------|--------------------|
| Pole Section-L1 | 29.2 % | 115.428 – 125.428 | PASS | |
| Pole Section-L2 | 80.1 % | 105.428 – 115.428 | PASS | |
| Pole Section-L3 | 94.9 % | 85.428 – 105.428 | PASS | Controlling |
| Pole Section-L4 | 85.1 % | 46.714 – 85.428 | PASS | |
| Pole Section-L5 | 78.0 % | 8 – 46.714 | PASS | |
| Anchor Rods & Base Plate | 59.1 % | - | PASS | |

FOUNDATION COMPARISON SUMMARY:

| | Design Capacity | Proposed Loading | Pass/Fail |
|--------------------|-----------------|------------------|-----------|
| Overturning | 2500 ft-kips | 2006.9 ft-kips | PASS |

Note: HDG referenced non-penetrating foundation design drawings provided by the client and prepared by Ambor Structures dated July 16, 2015. According to design drawings the non-penetrating foundation has an overturning moment capacity of 2500 ft-kips. To achieve said capacity there is a ballast requirement of a minimum of 251,000 lbs which consists of (6) 2 ft x 2 ft x 6 ft concrete waste blocks per sector, for a total of (72) concrete waste blocks, each block should weigh a minimum of 3,600 lbs.

DESIGN CRITERIA:

1. EIA/TIA-222-H Structural Standards for Steel Antenna Towers and Antenna Supporting Structures

County: Fairfield
Ultimate Wind Speed: 125 mph (3 second gust)
Structural Class: II
Exposure Category: C
Topographic Category: 1
Nominal Ice Thickness: 1 inch

2. Approximate height above grade to proposed antennas: 121'-7"

***Calculations and referenced documents are attached.**

ASSUMPTIONS:


1. The appurtenances configuration is as stated in this report. All antennas, coax cables and waveguide cables are assumed to be properly installed and supported as per the manufacturer's requirements.
2. The temporary monopole and the non-penetrating foundation are properly constructed and maintained. All structural members and their connections are assumed to be in good condition and are free from defects with no deterioration to its member capacities.
3. The support mounts and platforms are not analyzed and are considered adequate to support the loading. The analysis is limited to the primary support structure itself.

SUPPORT RECOMMENDATIONS:

HDG recommends that the proposed antennas, RRHs and Junction Box be mounted on the proposed platform supported by the temporary ballasted monopole.

CALCULATIONS

| | | | | | | |
|---|-------|----|--------|---------|---------|--------|
| 1 | 10.00 | 18 | 0.1600 | 17.7200 | 17.7200 | 303.4 |
| 2 | 10.00 | 18 | 0.1600 | 17.7200 | 17.7200 | 303.4 |
| 3 | 20.00 | 18 | 0.2000 | 17.7200 | 23.6200 | 884.3 |
| 4 | 38.71 | 18 | 0.2800 | 23.6200 | 33.8600 | 3332.0 |
| 5 | 38.71 | 18 | 0.3200 | 33.8600 | 44.0900 | 5172.1 |
| | | | | | | 9985.3 |

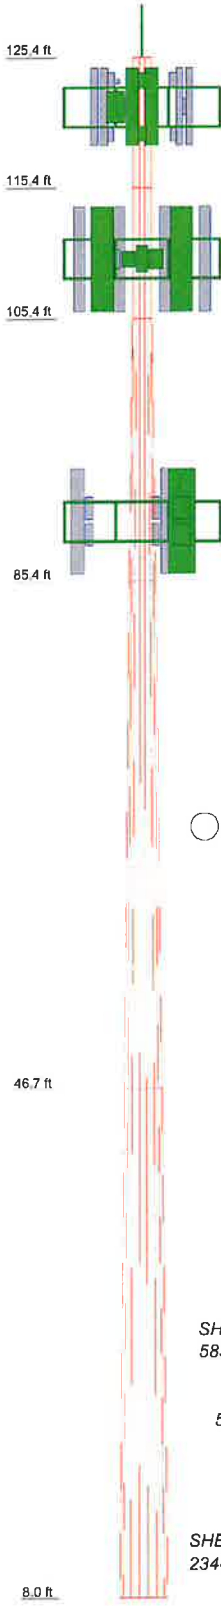

DESIGNED APPURTENANCE LOADING

| TYPE | ELEVATION | TYPE | ELEVATION |
|---|-----------|---|-----------|
| 4' Lightning Rod | 127.4 | TPA65R-BU8DA-K Antenna w/ Mounting Pipe | 110 |
| SNP12-XXX Tri-Cornered Platform w/ Handrail (Verizon) (Verizon) | 121.6 | TPA65R-BU8DA-K Antenna w/ Mounting Pipe | 110 |
| MX10FIT645-XX Antenna w/ Mounting Pipe | 121.6 | TPA65R-BU8DA-K Antenna w/ Mounting Pipe | 110 |
| MX10FIT665-xx Antenna w/ Mounting Pipe | 121.6 | 4449 B5/B12 RRH | 110 |
| MX10FIT665-xx Antenna w/ Mounting Pipe | 121.6 | 4449 B5/B12 RRH | 110 |
| MX10FIT645-XX Antenna w/ Mounting Pipe | 121.6 | B2/B66A 8843 RRH | 110 |
| MX10FIT665-xx Antenna w/ Mounting Pipe | 121.6 | B2/B66A 8843 RRH | 110 |
| MX10FIT665-xx Antenna w/ Mounting Pipe | 121.6 | B2/B66A 8843 RRH | 110 |
| MX10FIT665-xx Antenna w/ Mounting Pipe | 121.6 | 4415 B30 RRH | 110 |
| RF4439d-25A RRH | 121.6 | 4415 B30 RRH | 110 |
| RF4439d-25A RRH | 121.6 | 4415 B30 RRH | 110 |
| RF4439d-25A RRH | 121.6 | Squid Surge Arrestor | 110 |
| RF4440d-13A RRH | 121.6 | Tri-Cornered Platform w/ Handrail (T-Mobile) (T-Mobile) | 90 |
| RF4440d-13A RRH | 121.6 | APXVAALL24_43-U-NA20 Antenna w/ Mounting Pipe | 90 |
| RF4440d-13A RRH | 121.6 | APXVAALL24_43-U-NA20 Antenna w/ Mounting Pipe | 90 |
| RF4440d-13A RRH | 121.6 | APXVAALL24_43-U-NA20 Antenna w/ Mounting Pipe | 90 |
| RT4401-48A RRH | 121.6 | APXVAALL24_43-U-NA20 Antenna w/ Mounting Pipe | 90 |
| RT4401-48A RRH | 121.6 | AIR6449 B41 Antenna w/ Mounting Pipe | 90 |
| RT4401-48A RRH | 121.6 | AIR6449 B41 Antenna w/ Mounting Pipe | 90 |
| SDX1926Q-43 E14F05P86 Diplexer | 121.6 | AIR6449 B41 Antenna w/ Mounting Pipe | 90 |
| SDX1926Q-43 E14F05P86 Diplexer | 121.6 | 4480 B71+B85 RRH | 90 |
| OVP w/ Mounting Pipe | 121.6 | 4480 B71+B85 RRH | 90 |
| (3) 12'-6" Sector Frames (ATI) | 110 | 4480 B25+B66 RRH | 90 |
| TPA65R-BU8DA-K Antenna w/ Mounting Pipe | 110 | 4480 B25+B66 RRH | 90 |
| TPA65R-BU8DA-K Antenna w/ Mounting Pipe | 110 | 4480 B25+B66 RRH | 90 |
| TPA65R-BU8DA-K Antenna w/ Mounting Pipe | 110 | 4480 B25+B66 RRH | 90 |



MATERIAL STRENGTH

| GRADE | Fy | Fu | GRADE | Fy | Fu |
|---------|--------|--------|-------|----|----|
| A572-65 | 65 ksi | 80 ksi | | | |

TOWER DESIGN NOTES

1. Tower designed for Exposure C to the TIA-222-H Standard.
2. Tower designed for a 125 mph basic wind in accordance with the TIA-222-H Standard.
3. Tower is also designed for a 50 mph basic wind with 1.00 in ice. Ice is considered to increase in thickness with height.
4. Deflections are based upon a 60 mph wind.
5. Tower Risk Category II.
6. Topographic Category 1 with Crest Height of 0.00 ft
7. TOWER RATING: 94.9%

ALL REACTIONS ARE FACTORED



| | | | |
|-------------------------------------|----------------|---------------------------------------|--|
| Hudson Design Group LLC | | Job: 117.5' Temporary Monopole | |
| 45 Beechwood Drive | | | |
| North Andover, MA 01845 | | | |
| Phone: (978)-557-5553 | | | |
| FAX: (978)-336-5586 | | | |
| Project: PLATTSVILLE RELO CT | | App'd: | |
| Client: VERIZON | Drawn by: LBW | Scale: NTS | |
| Code: TIA-222-H | Date: 09/12/22 | Dwg No. E-1 | |
| Path: | | | |

| | | |
|--|---|----------------------------------|
| tnxTower Hudson Design Group LLC 45 Beechwood Drive North Andover, MA 01845 Phone: (978)-557-5553 FAX: (978)-336-5586 | Job 117.5' Temporary Monopole | Page 1 of 8 |
| | Project PLATTSVILLE RELO CT | Date 10:44:37 09/12/22 |
| | Client VERIZON | Designed by LBW |

Tower Input Data

The tower is a monopole.

This tower is designed using the TIA-222-H standard.

The following design criteria apply:

Tower base elevation above sea level: 8.00 ft.

Basic wind speed of 125 mph.

Risk Category II.

Exposure Category C.

Simplified Topographic Factor Procedure for wind speed-up calculations is used.

Topographic Category: 1.

Crest Height: 0.00 ft.

Nominal ice thickness of 1.0000 in.

Ice thickness is considered to increase with height.

Ice density of 56 pcf.

A wind speed of 50 mph is used in combination with ice.

Temperature drop of 50 °F.

Deflections calculated using a wind speed of 60 mph.

A non-linear (P-delta) analysis was used.

Pressures are calculated at each section.

Stress ratio used in pole design is 1.

Local bending stresses due to climbing loads, feed line supports, and appurtenance mounts are not considered.

Tapered Pole Section Geometry

| Section | Elevation ft | Section Length ft | Splice Length ft | Number of Sides | Top Diameter in | Bottom Diameter in | Wall Thickness in | Bend Radius in | Pole Grade |
|---------|-----------------|-------------------------|------------------------|-----------------------|-----------------------|--------------------------|-------------------------|----------------------|---------------------|
| L1 | 125.43-115.43 | 10.00 | 0.00 | 18 | 17.7200 | 17.7200 | 0.1600 | 0.6400 | A572-65 (65 ksi) |
| L2 | 115.43-105.43 | 10.00 | 0.00 | 18 | 17.7200 | 17.7200 | 0.1600 | 0.6400 | A572-65 (65 ksi) |
| L3 | 105.43-85.43 | 20.00 | 0.00 | 18 | 17.7200 | 23.6200 | 0.2000 | 0.8000 | A572-65 (65 ksi) |
| L4 | 85.43-46.71 | 38.71 | 0.00 | 18 | 23.6200 | 33.8600 | 0.2800 | 1.1200 | A572-65 (65 ksi) |
| L5 | 46.71-8.00 | 38.71 | | 18 | 33.8600 | 44.0900 | 0.3200 | 1.2800 | A572-65 (65 ksi) |

Tapered Pole Properties

| Section | Tip Dia. in | Area in ² | I in ⁴ | r in | C in | I/C in ³ | J in ⁴ | I/Q in ² | w in | w/t |
|---------|----------------|-------------------------|----------------------|---------|---------|------------------------|----------------------|------------------------|---------|--------|
| L1 | 17.9687 | 8.9177 | 347.4065 | 6.2338 | 9.0018 | 38.5932 | 695.2700 | 4.4597 | 2.8371 | 17.732 |
| | 17.9687 | 8.9177 | 347.4065 | 6.2338 | 9.0018 | 38.5932 | 695.2700 | 4.4597 | 2.8371 | 17.732 |
| L2 | 17.9687 | 8.9177 | 347.4065 | 6.2338 | 9.0018 | 38.5932 | 695.2700 | 4.4597 | 2.8371 | 17.732 |
| | 17.9687 | 8.9177 | 347.4065 | 6.2338 | 9.0018 | 38.5932 | 695.2700 | 4.4597 | 2.8371 | 17.732 |
| L3 | 17.9625 | 11.1217 | 431.2972 | 6.2196 | 9.0018 | 47.9125 | 863.1620 | 5.5619 | 2.7667 | 13.834 |
| | 23.9535 | 14.8670 | 1030.2320 | 8.3141 | 11.9990 | 85.8601 | 2061.8196 | 7.4349 | 3.8051 | 19.026 |
| L4 | 23.9412 | 20.7427 | 1427.5948 | 8.2857 | 11.9990 | 118.9765 | 2857.0681 | 10.3733 | 3.6643 | 13.087 |
| | 34.3392 | 29.8432 | 4251.5225 | 11.9209 | 17.2009 | 247.1689 | 8508.6392 | 14.9244 | 5.4666 | 19.523 |
| L5 | 34.3330 | 34.0659 | 4841.5400 | 11.9067 | 17.2009 | 281.4705 | 9689.4507 | 17.0362 | 5.3962 | 16.863 |
| | 44.7208 | 44.4563 | 10760.2904 | 15.5383 | 22.3977 | 480.4190 | 21534.7394 | 22.2324 | 7.1966 | 22.49 |

| | | | | |
|--|----------------|---------------------------|--------------------|-------------------|
| tnxTower Hudson Design Group LLC 45 Beechwood Drive North Andover, MA 01845 Phone: (978)-557-5553 FAX: (978)-336-5586 | Job | 117.5' Temporary Monopole | Page | 2 of 8 |
| | Project | PLATTSVILLE RELO CT | Date | 10:44:37 09/12/22 |
| | Client | VERIZON | Designed by | LBW |

| Tower Elevation | Gusset Area (per face) | Gusset Thickness | Gusset Grade | Adjust. Factor A_r | Adjust. Factor A_r | Weight Mult. | Double Angle Stitch Bolt Spacing Diagonals | Double Angle Stitch Bolt Spacing Horizontals | Double Angle Stitch Bolt Spacing Redundants |
|---------------------|------------------------|------------------|--------------|----------------------|----------------------|--------------|--|--|---|
| ft | ft ² | in | | | | | in | in | in |
| L1 125.43-115.43 | | | | 1 | 1 | 1 | | | |
| L2 115.43-105.43 | | | | 1 | 1 | 1 | | | |
| L3 105.43-85.43 | | | | 1 | 1 | 1 | | | |
| L4 85.43-46.71 | | | | 1 | 1 | 1 | | | |
| L5 46.71-8.00 | | | | 1 | 1 | 1 | | | |

Feed Line/Linear Appurtenances - Entered As Area

| Description | Face or Leg | Allow Shield | Exclude From Torque Calculation | Component Type | Placement | Total Number | $C_A A_A$ | Weight |
|--------------------------|-------------|--------------|---------------------------------|----------------|----------------|--------------|------------------------------|----------------------|
| | | | | | ft | | ft ² /ft | plf |
| 6x24 Hybrid Fiber Cables | C | No | No | Inside Pole | 90.00 - 11.00 | 2 | No Ice 1/2" Ice 1" Ice | 3.50 3.50 3.50 |
| 1/4 | C | No | No | Inside Pole | 90.00 - 11.00 | 2 | No Ice 1/2" Ice 1" Ice | 0.25 0.25 0.25 |
| ** DC Cable | C | No | No | Inside Pole | 110.00 - 11.00 | 3 | No Ice 1/2" Ice 1" Ice | 1.70 1.70 1.70 |
| Fiber | C | No | No | Inside Pole | 110.00 - 11.00 | 1 | No Ice 1/2" Ice 1" Ice | 0.48 0.48 0.48 |
| ** 12X24 Hybrid Cable | C | No | No | Inside Pole | 125.43 - 11.00 | 1 | No Ice 1/2" Ice 1" Ice | 3.20 3.20 3.20 |

Feed Line/Linear Appurtenances Section Areas

| Tower Section | Tower Elevation | Face | A_R | A_F | $C_A A_A$ In Face | $C_A A_A$ Out Face | Weight |
|---------------|-----------------|------|-----------------|-----------------|-------------------|--------------------|--------|
| | ft | | ft ² | ft ² | ft ² | ft ² | lb |
| L1 | 125.43-115.43 | A | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | B | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | C | 0.000 | 0.000 | 0.000 | 0.000 | 32.00 |
| L2 | 115.43-105.43 | A | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | B | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | C | 0.000 | 0.000 | 0.000 | 0.000 | 57.53 |
| L3 | 105.43-85.43 | A | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | B | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | C | 0.000 | 0.000 | 0.000 | 0.000 | 209.97 |
| L4 | 85.43-46.71 | A | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | B | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | C | 0.000 | 0.000 | 0.000 | 0.000 | 630.42 |
| L5 | 46.71-8.00 | A | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | B | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | C | 0.000 | 0.000 | 0.000 | 0.000 | 581.57 |

| | | | | |
|--|----------------|---------------------------|--------------------|-------------------|
| tnxTower Hudson Design Group LLC 45 Beechwood Drive North Andover, MA 01845 Phone: (978)-557-5553 FAX: (978)-336-5586 | Job | 117.5' Temporary Monopole | Page | 3 of 8 |
| | Project | PLATTSVILLE RELO CT | Date | 10:44:37 09/12/22 |
| | Client | VERIZON | Designed by | LBW |

Feed Line/Linear Appurtenances Section Areas - With Ice

| Tower Section | Tower Elevation ft | Face or Leg | Ice Thickness in | A _R ft ² | A _F ft ² | C _A A _A In Face ft ² | C _A A _A Out Face ft ² | Weight lb |
|---------------|-----------------------|-------------|---------------------|-----------------------------------|-----------------------------------|---|--|--------------|
| L1 | 125.43-115.43 | A | 1.138 | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | B | | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | C | | 0.000 | 0.000 | 0.000 | 0.000 | 32.00 |
| L2 | 115.43-105.43 | A | 1.128 | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | B | | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | C | | 0.000 | 0.000 | 0.000 | 0.000 | 57.53 |
| L3 | 105.43-85.43 | A | 1.111 | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | B | | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | C | | 0.000 | 0.000 | 0.000 | 0.000 | 209.97 |
| L4 | 85.43-46.71 | A | 1.070 | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | B | | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | C | | 0.000 | 0.000 | 0.000 | 0.000 | 630.42 |
| L5 | 46.71-8.00 | A | 0.981 | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | B | | 0.000 | 0.000 | 0.000 | 0.000 | 0.00 |
| | | C | | 0.000 | 0.000 | 0.000 | 0.000 | 581.57 |

Feed Line Center of Pressure

| Section | Elevation ft | CP _x in | CP _z in | CP _x Ice in | CP _z Ice in |
|---------|-----------------|-----------------------|-----------------------|------------------------------|------------------------------|
| L1 | 125.43-115.43 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| L2 | 115.43-105.43 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| L3 | 105.43-85.43 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| L4 | 85.43-46.71 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| L5 | 46.71-8.00 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |

Note: For pole sections, center of pressure calculations do not consider feed line shielding.

Discrete Tower Loads

| Description | Face or Leg | Offset Type | Offsets: Horz Lateral Vert ft ft ft | Azimuth Adjustment ° | Placement ft | C _A A _A Front ft ² | C _A A _A Side ft ² | Weight lb |
|---|-------------|-------------|---|-------------------------|-----------------|---|--|--------------|
| 4' Lightning Rod | C | None | | 0.0000 | 127.40 | No Ice | 0.79 | 50.00 |
| | | | | | | 1/2" Ice | 1.03 | 56.34 |
| | | | | | | 1" Ice | 1.28 | 65.48 |
| ** SNP12-XXX Tri-Cornered Platform w/ Handrail (Verizon) | C | None | | 0.0000 | 121.60 | No Ice | 23.30 | 3279.00 |
| | | | | | | 1/2" Ice | 34.44 | 3811.00 |
| | | | | | | 1" Ice | 44.64 | 4604.00 |
| MX10FIT645-XX Antenna w/ Mounting Pipe | A | From Face | 3.00 0.75 0.00 | 0.0000 | 121.60 | No Ice | 10.09 | 82.20 |
| | | | | | | 1/2" Ice | 10.77 | 161.42 |
| | | | | | | 1" Ice | 11.42 | 248.96 |
| MX10FIT665-xx Antenna w/ Mounting Pipe | B | From Face | 3.00 0.75 0.00 | 0.0000 | 121.60 | No Ice | 8.11 | 75.90 |
| | | | | | | 1/2" Ice | 8.57 | 142.99 |
| | | | | | | 1" Ice | 9.04 | 217.82 |
| MX10FIT665-xx Antenna w/ Mounting Pipe | C | From Face | 3.00 0.75 | 0.0000 | 121.60 | No Ice | 8.11 | 75.90 |
| | | | | | | 1/2" Ice | 8.57 | 142.99 |

| | | | | |
|--|----------------|---------------------------|--------------------|-------------------|
| tnxTower Hudson Design Group LLC 45 Beechwood Drive North Andover, MA 01845 Phone: (978)-557-5553 FAX: (978)-336-5586 | Job | 117.5' Temporary Monopole | Page | 4 of 8 |
| | Project | PLATTSVILLE RELO CT | Date | 10:44:37 09/12/22 |
| | Client | VERIZON | Designed by | LBW |

| Description | Face or Leg | Offset Type | Offsets: Horiz Lateral Vert ft ft ft | Azimuth Adjustment ° | Placement ft | | C _A A _A Front ft ² | C _A A _A Side ft ² | Weight lb |
|--|-------------|-------------|---|-------------------------|-----------------|----------|--|---|--------------|
| | | | 0.00 | | | 1" Ice | 9.04 | 8.67 | 217.82 |
| MX10FIT645-XX Antenna w/ Mounting Pipe | A | From Face | 3.00 | 0.0000 | 121.60 | No Ice | 10.09 | 7.31 | 82.20 |
| | | | -0.75 | | | 1/2" Ice | 10.77 | 8.59 | 161.42 |
| | | | 0.00 | | | 1" Ice | 11.42 | 9.72 | 248.96 |
| MX10FIT665-xx Antenna w/ Mounting Pipe | B | From Face | 3.00 | 0.0000 | 121.60 | No Ice | 8.11 | 6.90 | 75.90 |
| | | | -0.75 | | | 1/2" Ice | 8.57 | 7.85 | 142.99 |
| | | | 0.00 | | | 1" Ice | 9.04 | 8.67 | 217.82 |
| MX10FIT665-xx Antenna w/ Mounting Pipe | C | From Face | 3.00 | 0.0000 | 121.60 | No Ice | 8.11 | 6.90 | 75.90 |
| | | | -0.75 | | | 1/2" Ice | 8.57 | 7.85 | 142.99 |
| | | | 0.00 | | | 1" Ice | 9.04 | 8.67 | 217.82 |
| RF4439d-25A RRH | A | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 1.88 | 1.25 | 98.00 |
| | | | 0.00 | | | 1/2" Ice | 2.05 | 1.39 | 116.34 |
| | | | 2.00 | | | 1" Ice | 2.22 | 1.54 | 137.47 |
| RF4439d-25A RRH | A | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 1.88 | 1.25 | 98.00 |
| | | | 0.00 | | | 1/2" Ice | 2.05 | 1.39 | 116.34 |
| | | | 2.00 | | | 1" Ice | 2.22 | 1.54 | 137.47 |
| RF4439d-25A RRH | B | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 1.88 | 1.25 | 98.00 |
| | | | 0.00 | | | 1/2" Ice | 2.05 | 1.39 | 116.34 |
| | | | 2.00 | | | 1" Ice | 2.22 | 1.54 | 137.47 |
| RF4439d-25A RRH | C | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 1.88 | 1.25 | 98.00 |
| | | | 0.00 | | | 1/2" Ice | 2.05 | 1.39 | 116.34 |
| | | | 2.00 | | | 1" Ice | 2.22 | 1.54 | 137.47 |
| RF4440d-13A RRH | A | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 1.88 | 1.01 | 82.00 |
| | | | 2.00 | | | 1/2" Ice | 2.05 | 1.14 | 98.43 |
| | | | 0.00 | | | 1" Ice | 2.22 | 1.28 | 117.53 |
| RF4440d-13A RRH | A | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 1.88 | 1.01 | 82.00 |
| | | | 2.00 | | | 1/2" Ice | 2.05 | 1.14 | 98.43 |
| | | | 0.00 | | | 1" Ice | 2.22 | 1.28 | 117.53 |
| RF4440d-13A RRH | B | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 1.88 | 1.01 | 82.00 |
| | | | 2.00 | | | 1/2" Ice | 2.05 | 1.14 | 98.43 |
| | | | 0.00 | | | 1" Ice | 2.22 | 1.28 | 117.53 |
| RF4440d-13A RRH | C | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 1.88 | 1.01 | 82.00 |
| | | | 2.00 | | | 1/2" Ice | 2.05 | 1.14 | 98.43 |
| | | | 0.00 | | | 1" Ice | 2.22 | 1.28 | 117.53 |
| RT4401-48A RRH | A | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 1.00 | 0.50 | 19.00 |
| | | | 0.00 | | | 1/2" Ice | 1.12 | 0.60 | 26.83 |
| | | | -2.00 | | | 1" Ice | 1.26 | 0.71 | 36.59 |
| RT4401-48A RRH | A | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 1.00 | 0.50 | 19.00 |
| | | | 0.00 | | | 1/2" Ice | 1.12 | 0.60 | 26.83 |
| | | | -2.00 | | | 1" Ice | 1.26 | 0.71 | 36.59 |
| RT4401-48A RRH | B | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 1.00 | 0.50 | 19.00 |
| | | | 0.00 | | | 1/2" Ice | 1.12 | 0.60 | 26.83 |
| | | | -2.00 | | | 1" Ice | 1.26 | 0.71 | 36.59 |
| RT4401-48A RRH | C | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 1.00 | 0.50 | 19.00 |
| | | | 0.00 | | | 1/2" Ice | 1.12 | 0.60 | 26.83 |
| | | | -2.00 | | | 1" Ice | 1.26 | 0.71 | 36.59 |
| SDX1926Q-43 E14F05P86 Diplexer | A | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 0.24 | 0.10 | 7.00 |
| | | | 1.00 | | | 1/2" Ice | 0.31 | 0.14 | 9.47 |
| | | | 2.00 | | | 1" Ice | 0.38 | 0.20 | 13.04 |
| SDX1926Q-43 E14F05P86 Diplexer | A | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 0.24 | 0.10 | 7.00 |
| | | | 1.00 | | | 1/2" Ice | 0.31 | 0.14 | 9.47 |
| | | | 2.00 | | | 1" Ice | 0.38 | 0.20 | 13.04 |
| OVP w/ Mounting Pipe | C | From Face | 2.00 | 0.0000 | 121.60 | No Ice | 4.63 | 3.93 | 53.90 |
| | | | 2.00 | | | 1/2" Ice | 5.18 | 4.65 | 101.19 |
| | | | 0.00 | | | 1" Ice | 5.66 | 5.24 | 153.91 |
| ** | | | | | | | | | |
| (3) 12'-6" Sector Frames | C | None | | 0.0000 | 110.00 | No Ice | 19.00 | 13.50 | 3000.00 |

| | | | | |
|--|----------------|---------------------------|--------------------|-------------------|
| tnxTower Hudson Design Group LLC 45 Beechwood Drive North Andover, MA 01845 Phone: (978)-557-5553 FAX: (978)-336-5586 | Job | 117.5' Temporary Monopole | Page | 5 of 8 |
| | Project | PLATTSVILLE RELO CT | Date | 10:44:37 09/12/22 |
| | Client | VERIZON | Designed by | LBW |

| Description | Face or Leg | Offset Type | Offsets: Horz Lateral Vert ft ft ft | Azimuth Adjustment ° | Placement ft | C _A A _{Front} ft ² | C _A A _{Side} ft ² | Weight lb |
|---|-------------|-------------|-------------------------------------|----------------------|--------------|---|--|-----------|
| (AT&T) | | | | | | 1/2" Ice 28.50 | 21.00 | 3500.00 |
| | | | | | | 1" Ice 37.00 | 27.50 | 4150.00 |
| TPA65R-BU8DA-K Antenna w/ Mounting Pipe | A | From Face | 3.00 | 0.0000 | 110.00 | No Ice 17.87 | 10.02 | 116.20 |
| | | | -3.00 | | | 1/2" Ice 18.50 | 11.44 | 234.88 |
| | | | 0.00 | | | 1" Ice 19.14 | 12.72 | 363.91 |
| TPA65R-BU8DA-K Antenna w/ Mounting Pipe | B | From Face | 3.00 | 0.0000 | 110.00 | No Ice 17.87 | 10.02 | 116.20 |
| | | | -3.00 | | | 1/2" Ice 18.50 | 11.44 | 234.88 |
| | | | 0.00 | | | 1" Ice 19.14 | 12.72 | 363.91 |
| TPA65R-BU8DA-K Antenna w/ Mounting Pipe | C | From Face | 3.00 | 0.0000 | 110.00 | No Ice 17.87 | 10.02 | 116.20 |
| | | | -3.00 | | | 1/2" Ice 18.50 | 11.44 | 234.88 |
| | | | 0.00 | | | 1" Ice 19.14 | 12.72 | 363.91 |
| TPA65R-BU8DA-K Antenna w/ Mounting Pipe | A | From Face | 3.00 | 0.0000 | 110.00 | No Ice 17.87 | 10.02 | 116.20 |
| | | | 3.00 | | | 1/2" Ice 18.50 | 11.44 | 234.88 |
| | | | 0.00 | | | 1" Ice 19.14 | 12.72 | 363.91 |
| TPA65R-BU8DA-K Antenna w/ Mounting Pipe | B | From Face | 3.00 | 0.0000 | 110.00 | No Ice 17.87 | 10.02 | 116.20 |
| | | | 3.00 | | | 1/2" Ice 18.50 | 11.44 | 234.88 |
| | | | 0.00 | | | 1" Ice 19.14 | 12.72 | 363.91 |
| TPA65R-BU8DA-K Antenna w/ Mounting Pipe | C | From Face | 3.00 | 0.0000 | 110.00 | No Ice 17.87 | 10.02 | 116.20 |
| | | | 3.00 | | | 1/2" Ice 18.50 | 11.44 | 234.88 |
| | | | 0.00 | | | 1" Ice 19.14 | 12.72 | 363.91 |
| 4449 B5/B12 RRH | A | From Face | 1.00 | 0.0000 | 110.00 | No Ice 1.97 | 1.40 | 73.00 |
| | | | -1.00 | | | 1/2" Ice 2.15 | 1.56 | 91.48 |
| | | | 0.00 | | | 1" Ice 2.33 | 1.72 | 112.77 |
| 4449 B5/B12 RRH | B | From Face | 1.00 | 0.0000 | 110.00 | No Ice 1.97 | 1.40 | 73.00 |
| | | | -1.00 | | | 1/2" Ice 2.15 | 1.56 | 91.48 |
| | | | 0.00 | | | 1" Ice 2.33 | 1.72 | 112.77 |
| 4449 B5/B12 RRH | C | From Face | 1.00 | 0.0000 | 110.00 | No Ice 1.97 | 1.40 | 73.00 |
| | | | -1.00 | | | 1/2" Ice 2.15 | 1.56 | 91.48 |
| | | | 0.00 | | | 1" Ice 2.33 | 1.72 | 112.77 |
| B2/B66A 8843 RRH | A | From Face | 1.00 | 0.0000 | 110.00 | No Ice 1.64 | 1.35 | 72.00 |
| | | | 1.00 | | | 1/2" Ice 1.80 | 1.50 | 89.60 |
| | | | 0.00 | | | 1" Ice 1.97 | 1.65 | 109.91 |
| B2/B66A 8843 RRH | B | From Face | 1.00 | 0.0000 | 110.00 | No Ice 1.64 | 1.35 | 72.00 |
| | | | 1.00 | | | 1/2" Ice 1.80 | 1.50 | 89.60 |
| | | | 0.00 | | | 1" Ice 1.97 | 1.65 | 109.91 |
| B2/B66A 8843 RRH | C | From Face | 1.00 | 0.0000 | 110.00 | No Ice 1.64 | 1.35 | 72.00 |
| | | | 1.00 | | | 1/2" Ice 1.80 | 1.50 | 89.60 |
| | | | 0.00 | | | 1" Ice 1.97 | 1.65 | 109.91 |
| 4415 B30 RRH | A | From Face | 1.00 | 0.0000 | 110.00 | No Ice 1.64 | 0.68 | 44.00 |
| | | | 0.00 | | | 1/2" Ice 1.80 | 0.79 | 56.41 |
| | | | 0.00 | | | 1" Ice 1.97 | 0.91 | 71.18 |
| 4415 B30 RRH | B | From Face | 1.00 | 0.0000 | 110.00 | No Ice 1.64 | 0.68 | 44.00 |
| | | | 0.00 | | | 1/2" Ice 1.80 | 0.79 | 56.41 |
| | | | 0.00 | | | 1" Ice 1.97 | 0.91 | 71.18 |
| 4415 B30 RRH | C | From Face | 1.00 | 0.0000 | 110.00 | No Ice 1.64 | 0.68 | 44.00 |
| | | | 0.00 | | | 1/2" Ice 1.80 | 0.79 | 56.41 |
| | | | 0.00 | | | 1" Ice 1.97 | 0.91 | 71.18 |
| Squid Surge Arrestor | C | From Face | 1.00 | 0.0000 | 110.00 | No Ice 0.81 | 0.81 | 33.00 |
| | | | 0.00 | | | 1/2" Ice 1.30 | 1.30 | 48.38 |
| | | | 0.00 | | | 1" Ice 1.48 | 1.48 | 66.11 |
| ** | | | | | | | | |
| Tri-Cornered Platform w/ Handrail (T-Mobile) (T-Mobile) | C | None | | 0.0000 | 90.00 | No Ice 23.50 | 17.00 | 3300.00 |
| | | | | | | 1/2" Ice 34.50 | 26.00 | 3850.00 |
| | | | | | | 1" Ice 45.00 | 34.50 | 4650.00 |
| APXVAALL24_43-U-NA20 Antenna w/ Mounting Pipe | A | From Face | 3.00 | 0.0000 | 90.00 | No Ice 20.24 | 10.79 | 157.20 |
| | | | -3.00 | | | 1/2" Ice 20.89 | 12.21 | 290.89 |
| | | | 0.00 | | | 1" Ice 21.55 | 13.49 | 435.20 |

| | | | | |
|--|----------------|---------------------------|--------------------|-------------------|
| tnxTower Hudson Design Group LLC 45 Beechwood Drive North Andover, MA 01845 Phone: (978)-557-5553 FAX: (978)-336-5586 | Job | 117.5' Temporary Monopole | Page | 6 of 8 |
| | Project | PLATTSVILLE RELO CT | Date | 10:44:37 09/12/22 |
| | Client | VERIZON | Designed by | LBW |

| Description | Face or Leg | Offset Type | Offsets: Horz Lateral Vert | Azimuth Adjustment | Placement | C _A A ₁ Front | C _A A ₂ Side | Weight | |
|---|-------------|-------------|----------------------------|--------------------|-----------|-------------------------------------|------------------------------------|-------------------------|----------------------------|
| | | | ft | ° | ft | ft ² | ft ² | lb | |
| APXVAALL24_43-U-NA20 Antenna w/ Mounting Pipe | B | From Face | 3.00 -3.00 0.00 | 0.0000 | 90.00 | No Ice 1/2" Ice 1" Ice | 20.24 20.89 21.55 | 10.79 12.21 13.49 | 157.20 290.89 435.20 |
| APXVAALL24_43-U-NA20 Antenna w/ Mounting Pipe | C | From Face | 3.00 -3.00 0.00 | 0.0000 | 90.00 | No Ice 1/2" Ice 1" Ice | 20.24 20.89 21.55 | 10.79 12.21 13.49 | 157.20 290.89 435.20 |
| AIR6449 B41 Antenna w/ Mounting Pipe | A | From Face | 0.00 3.00 0.00 | 0.0000 | 90.00 | No Ice 1/2" Ice 1" Ice | 6.42 7.00 7.50 | 3.89 4.62 5.22 | 124.90 179.59 240.17 |
| AIR6449 B41 Antenna w/ Mounting Pipe | B | From Face | 3.00 3.00 0.00 | 0.0000 | 90.00 | No Ice 1/2" Ice 1" Ice | 6.42 7.00 7.50 | 3.89 4.62 5.22 | 124.90 179.59 240.17 |
| AIR6449 B41 Antenna w/ Mounting Pipe | C | From Face | 3.00 3.00 0.00 | 0.0000 | 90.00 | No Ice 1/2" Ice 1" Ice | 6.42 7.00 7.50 | 3.89 4.62 5.22 | 124.90 179.59 240.17 |
| 4480 B71+B85 RRH | A | From Face | 2.00 -3.00 1.00 | 0.0000 | 90.00 | No Ice 1/2" Ice 1" Ice | 2.42 2.61 2.81 | 1.20 1.35 1.51 | 93.00 112.12 134.14 |
| 4480 B71+B85 RRH | B | From Face | 2.00 -3.00 1.00 | 0.0000 | 90.00 | No Ice 1/2" Ice 1" Ice | 2.42 2.61 2.81 | 1.20 1.35 1.51 | 93.00 112.12 134.14 |
| 4480 B71+B85 RRH | C | From Face | 2.00 -3.00 1.00 | 0.0000 | 90.00 | No Ice 1/2" Ice 1" Ice | 2.42 2.61 2.81 | 1.20 1.35 1.51 | 93.00 112.12 134.14 |
| 4460 B25+B66 RRH | A | From Face | 2.00 -3.00 -1.00 | 0.0000 | 90.00 | No Ice 1/2" Ice 1" Ice | 2.56 2.76 2.97 | 1.98 2.16 2.34 | 109.00 134.38 163.03 |
| 4460 B25+B66 RRH | B | From Face | 2.00 -3.00 -1.00 | 0.0000 | 90.00 | No Ice 1/2" Ice 1" Ice | 2.56 2.76 2.97 | 1.98 2.16 2.34 | 109.00 134.38 163.03 |
| 4460 B25+B66 RRH | C | From Face | 2.00 -3.00 -1.00 | 0.0000 | 90.00 | No Ice 1/2" Ice 1" Ice | 2.56 2.76 2.97 | 1.98 2.16 2.34 | 109.00 134.38 163.03 |

Load Combinations

| Comb. No. | Description |
|-----------|------------------------------------|
| 1 | Dead Only |
| 2 | 1.2 Dead+1.0 Wind 0 deg - No Ice |
| 3 | 0.9 Dead+1.0 Wind 0 deg - No Ice |
| 4 | 1.2 Dead+1.0 Wind 30 deg - No Ice |
| 5 | 0.9 Dead+1.0 Wind 30 deg - No Ice |
| 6 | 1.2 Dead+1.0 Wind 60 deg - No Ice |
| 7 | 0.9 Dead+1.0 Wind 60 deg - No Ice |
| 8 | 1.2 Dead+1.0 Wind 90 deg - No Ice |
| 9 | 0.9 Dead+1.0 Wind 90 deg - No Ice |
| 10 | 1.2 Dead+1.0 Wind 120 deg - No Ice |
| 11 | 0.9 Dead+1.0 Wind 120 deg - No Ice |
| 12 | 1.2 Dead+1.0 Wind 150 deg - No Ice |
| 13 | 0.9 Dead+1.0 Wind 150 deg - No Ice |
| 14 | 1.2 Dead+1.0 Wind 180 deg - No Ice |
| 15 | 0.9 Dead+1.0 Wind 180 deg - No Ice |
| 16 | 1.2 Dead+1.0 Wind 210 deg - No Ice |
| 17 | 0.9 Dead+1.0 Wind 210 deg - No Ice |

| | | | | |
|--|----------------|---------------------------|--------------------|-------------------|
| tnxTower Hudson Design Group LLC 45 Beechwood Drive North Andover, MA 01845 Phone: (978)-557-5553 FAX: (978)-336-5586 | Job | 117.5' Temporary Monopole | Page | 7 of 8 |
| | Project | PLATTSVILLE RELO CT | Date | 10:44:37 09/12/22 |
| | Client | VERIZON | Designed by | LBW |

| Comb. No. | Description |
|-----------|--|
| 18 | 1.2 Dead+1.0 Wind 240 deg - No Ice |
| 19 | 0.9 Dead+1.0 Wind 240 deg - No Ice |
| 20 | 1.2 Dead+1.0 Wind 270 deg - No Ice |
| 21 | 0.9 Dead+1.0 Wind 270 deg - No Ice |
| 22 | 1.2 Dead+1.0 Wind 300 deg - No Ice |
| 23 | 0.9 Dead+1.0 Wind 300 deg - No Ice |
| 24 | 1.2 Dead+1.0 Wind 330 deg - No Ice |
| 25 | 0.9 Dead+1.0 Wind 330 deg - No Ice |
| 26 | 1.2 Dead+1.0 Ice+1.0 Temp |
| 27 | 1.2 Dead+1.0 Wind 0 deg+1.0 Ice+1.0 Temp |
| 28 | 1.2 Dead+1.0 Wind 30 deg+1.0 Ice+1.0 Temp |
| 29 | 1.2 Dead+1.0 Wind 60 deg+1.0 Ice+1.0 Temp |
| 30 | 1.2 Dead+1.0 Wind 90 deg+1.0 Ice+1.0 Temp |
| 31 | 1.2 Dead+1.0 Wind 120 deg+1.0 Ice+1.0 Temp |
| 32 | 1.2 Dead+1.0 Wind 150 deg+1.0 Ice+1.0 Temp |
| 33 | 1.2 Dead+1.0 Wind 180 deg+1.0 Ice+1.0 Temp |
| 34 | 1.2 Dead+1.0 Wind 210 deg+1.0 Ice+1.0 Temp |
| 35 | 1.2 Dead+1.0 Wind 240 deg+1.0 Ice+1.0 Temp |
| 36 | 1.2 Dead+1.0 Wind 270 deg+1.0 Ice+1.0 Temp |
| 37 | 1.2 Dead+1.0 Wind 300 deg+1.0 Ice+1.0 Temp |
| 38 | 1.2 Dead+1.0 Wind 330 deg+1.0 Ice+1.0 Temp |
| 39 | Dead+Wind 0 deg - Service |
| 40 | Dead+Wind 30 deg - Service |
| 41 | Dead+Wind 60 deg - Service |
| 42 | Dead+Wind 90 deg - Service |
| 43 | Dead+Wind 120 deg - Service |
| 44 | Dead+Wind 150 deg - Service |
| 45 | Dead+Wind 180 deg - Service |
| 46 | Dead+Wind 210 deg - Service |
| 47 | Dead+Wind 240 deg - Service |
| 48 | Dead+Wind 270 deg - Service |
| 49 | Dead+Wind 300 deg - Service |
| 50 | Dead+Wind 330 deg - Service |

Maximum Member Forces

| Section No. | Elevation ft | Component Type | Condition | Gov. Load Comb. | Axial lb | Major Axis Moment lb-ft | Minor Axis Moment lb-ft |
|-------------|-------------------|----------------|------------------|-----------------|-----------|-------------------------|-------------------------|
| L1 | 125.428 - 115.428 | Pole | Max Tension | 20 | 0.10 | -0.04 | -0.86 |
| | | | Max. Compression | 26 | -9345.64 | 1374.90 | 434.83 |
| | | | Max. Mx | 20 | -5242.13 | 35885.40 | 1093.13 |
| | | | Max. My | 2 | -5261.50 | 1289.69 | 35004.67 |
| | | | Max. Vy | 20 | -5725.67 | 35885.40 | 1093.13 |
| | | | Max. Vx | 2 | -5632.42 | 1289.69 | 35004.67 |
| | | | Max. Torque | 2 | | | 752.41 |
| | | | Max Tension | 1 | 0.00 | 0.00 | 0.00 |
| L2 | 115.428 - 105.428 | Pole | Max. Compression | 26 | -18555.28 | 1418.44 | 304.18 |
| | | | Max. Mx | 20 | -10074.81 | 122994.14 | 2159.18 |
| | | | Max. My | 2 | -10099.03 | 2443.91 | 121098.70 |
| | | | Max. Vy | 20 | -12183.35 | 122994.14 | 2159.18 |
| | | | Max. Vx | 2 | -12086.19 | 2443.91 | 121098.70 |
| | | | Max. Torque | 2 | | | 752.29 |
| | | | Max Tension | 1 | 0.00 | 0.00 | 0.00 |
| | | | Max. Compression | 26 | -29259.94 | 723.20 | -116.82 |
| L3 | 105.428 - 85.428 | Pole | Max. Mx | 20 | -16931.85 | 398709.81 | 4246.08 |
| | | | Max. My | 2 | -16951.98 | 4423.10 | 395063.50 |

| | | | | |
|--|----------------|---------------------------|--------------------|-------------------|
| tnxTower Hudson Design Group LLC 45 Beechwood Drive North Andover, MA 01845 Phone: (978)-557-5553 FAX: (978)-336-5586 | Job | 117.5' Temporary Monopole | Page | 8 of 8 |
| | Project | PLATTSVILLE RELO CT | Date | 10:44:37 09/12/22 |
| | Client | VERIZON | Designed by | LBW |

| Section No. | Elevation ft | Component Type | Condition | Gov. Load Comb. | Axial lb | Major Axis Moment lb-ft | Minor Axis Moment lb-ft |
|-------------|-----------------|----------------|------------------|-----------------|-----------|-------------------------|-------------------------|
| L4 | 85.428 - 46.714 | Pole | Max. Vy | 20 | -18101.31 | 398709.81 | 4246.08 |
| | | | Max. Vx | 2 | -18003.62 | 4423.10 | 395063.50 |
| | | | Max. Torque | 2 | | | 751.77 |
| | | | Max Tension | 1 | 0.00 | 0.00 | 0.00 |
| | | | Max. Compression | 26 | -35539.83 | 683.96 | -120.77 |
| | | | Max. Mx | 20 | -22512.90 | 1146285.98 | 8598.00 |
| L5 | 46.714 - 8 | Pole | Max. My | 2 | -22521.61 | 8808.71 | 1139003.53 |
| | | | Max. Vy | 8 | 20648.24 | -1145729.2 | -8353.03 |
| | | | | | | 0 | |
| | | | Max. Vx | 2 | -20555.39 | 8808.71 | 1139003.53 |
| | | | Max. Torque | 24 | | | 475.08 |
| | | | Max Tension | 1 | 0.00 | 0.00 | 0.00 |
| | | | Max. Compression | 26 | -44317.47 | 641.44 | -125.05 |
| | | | Max. Mx | 20 | -30239.27 | 1998359.56 | 12702.09 |
| | | | Max. My | 2 | -30239.61 | 12915.74 | 1987645.90 |
| | | | Max. Vy | 8 | 23398.50 | -1997868.4 | -12454.83 |
| | | | | | | 0 | |
| | | | Max. Vx | 2 | -23310.60 | 12915.74 | 1987645.90 |
| Max. Torque | 24 | | | 472.21 | | | |

Section Capacity Table

| Section No. | Elevation ft | Component Type | Size | Critical Element | P lb | ϕP_{allow} lb | % Capacity | Pass Fail | |
|-------------|-------------------|----------------|--------------------|------------------|-----------|---------------------|------------|-----------|------|
| L1 | 125.428 - 115.428 | Pole | TP17.72x17.72x0.16 | 1 | -5227.43 | 39426.80 | 29.2 | Pass | |
| L2 | 115.428 - 105.428 | Pole | TP17.72x17.72x0.16 | 2 | -10056.10 | 39426.80 | 80.1 | Pass | |
| L3 | 105.428 - 85.428 | Pole | TP23.62x17.72x0.2 | 3 | -16915.90 | 116920.00 | 94.9 | Pass | |
| L4 | 85.428 - 46.714 | Pole | TP33.86x23.62x0.28 | 4 | -22506.10 | 482501.00 | 85.1 | Pass | |
| L5 | 46.714 - 8 | Pole | TP44.09x33.86x0.32 | 5 | -30239.40 | 1190110.00 | 78.0 | Pass | |
| | | | | | | | Summary | | |
| | | | | | | | Pole (L3) | 94.9 | Pass |
| | | | | | | | RATING = | 94.9 | Pass |

Monopole Base Plate Connection




| Site Info | |
|-----------|---------------------|
| BU # | |
| Site Name | Plattsville Relo CT |
| Order # | |

| Analysis Considerations | |
|-------------------------|------|
| TIA-222 Revision | H |
| Grout Considered: | No |
| l_{er} (in) | 1.25 |

| Applied Loads | |
|--------------------|---------|
| Moment (kip-ft) | 2006.91 |
| Axial Force (kips) | 30.26 |
| Shear Force (kips) | 23.44 |

*TIA-222-H Section 15.5 Applied

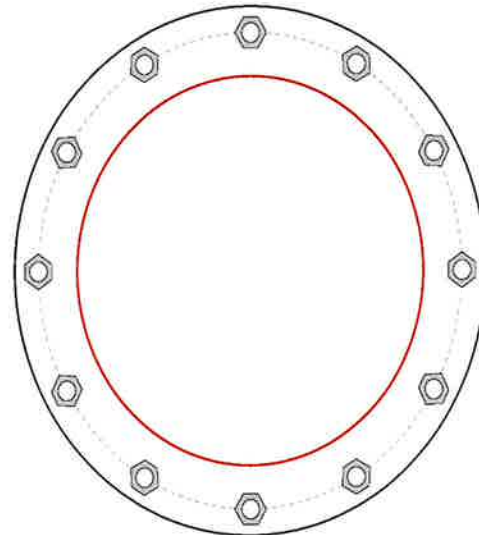

| Connection Properties | Analysis Results |
|-----------------------|------------------|
|-----------------------|------------------|

| Anchor Rod Data |
|---|
| (12) 2-1/4" ϕ bolts (A615-75 N; $F_y=75$ ksi, $F_u=100$ ksi) on 54" BC |
| Base Plate Data |
| 60" OD x 2.75" Plate (A572-50; $F_y=50$ ksi, $F_u=65$ ksi) |
| Stiffener Data |
| N/A |
| Pole Data |
| 44.09" x 0.32" 18-sided pole (A572-65; $F_y=65$ ksi, $F_u=80$ ksi) |

| Anchor Rod Summary | <i>(units of kips, kip-in)</i> | |
|-------------------------|--------------------------------|----------------------|
| $P_{u_c} = 151.08$ | $\phi P_{n_c} = 243.75$ | Stress Rating |
| $V_u = 1.95$ | $\phi V_n = 73.13$ | 59.1% |
| $M_u = n/a$ | $\phi M_n = n/a$ | Pass |
| Base Plate Summary | | |
| Max Stress (ksi): | 19.99 | (Flexural) |
| Allowable Stress (ksi): | 45 | |
| Stress Rating: | 42.3% | Pass |

Date: 9/12/2022
 Project Name: PLATTESVILLE RELO CT
 Designed By: LBW Checked By: MSC



Check Concrete Waste Blocks:

Nominal Weight of Concrete: 150 pcf
 Volume of Concrete: 24 ft³
 Weight of Concrete Waste Block: 3600 lbs

| Item | Wt. (Lbs) | Qty. | Total (Lbs.) |
|----------------------------------|-----------|------|-------------------|
| Concrete Waste Blocks | 3600 | 72 | 259200 |
| Total, T_{weight} | | | 259200 lbs |

Minimum Ballast Weight Requirement for Overturning:

**HDG referenced Non-Penetrating Foundation Design Drawings provided by the client and prepared by Ambor Structures dated July 16, 2015.*

= 251000 lbs.

Check Non-Penetrating Foundation Weight Requirements for Overturning:

= 251000 lbs. < 259200 lbs. O.K!

Check Soil Bearing Capacity:

| Item | Wt. (Lbs) | Qty. | Total (Lbs.) |
|----------------------------------|-----------|------|-------------------|
| Monopole | 30261 | 1 | 30261 |
| Concrete Waste Blocks | 3600 | 72 | 259200 |
| Misc. | 15000 | 1 | 15000 |
| Total, T_{weight} | | | 304461 lbs |

Diameter of Base: 24.5 ft
 Area of Base: 472.7 ft²
 Bearing Pressure: 644.1 psf

Assumed Soil Bearing Capacity:

**Due to lack of information a worse case presumptive load-bearing value was used to calculate the soil bearing capacity. According to the IBC 2015 Section 1806.2 the worse case presumptive load bearing value is 1500 psf.*

= 1500 psf (See IBC 2015 Section 1806.2)

Check Soil Bearing Capacity:

= 644.1 psf < 1500 psf O.K!

MX10FIT645-xx

NWAV™ X-Pol Ten-Port Antenna

X-Pol Ten-Port 6 ft, 45° Form in Tigher, with Smart Bias Ts, 698-4200 MHz:

2 ports 698-894 MHz, 4 ports 1695-2180 MHz, and 4 ports 3400-4200 MHz

- Excellent passive intermodulation (PIM) performance reduces harmful interference.
- Fully integrated (iRETs) with independent RET control for low band and mid band
- FET configured with internal RET for 3.4-4.2 GHz and ease of future network optimization.
- Optimized CBRS vertical beamwidth to maximize EIRP and RSRP performance
- SON-Ready array spacing supports beamforming capabilities
- Integrated Smart Bias-Ts reduce leasing costs




| Electrical specification (minimum/maximum) | Ports 1, 2 | | Ports 3, 4, 5, 6 | | |
|---|---------------|---------|------------------|-----------|-----------|
| | 698-798 | 824-894 | 1695-1880 | 1850-1990 | 1920-2180 |
| Frequency bands, MHz | 698-798 | 824-894 | 1695-1880 | 1850-1990 | 1920-2180 |
| Polarization | ± 45° | | ± 45° | | |
| Average gain over all tilts, dBi | 16.0 | 16.5 | 18.0 | 18.5 | 18.8 |
| Horizontal beamwidth (HBW), degrees ¹ | 47.5 | 45.0 | 46.0 | 45.0 | 43.0 |
| Front-to-back ratio, co-polar power @180°± 30°, dB | >22.0 | >21.0 | >25.0 | >25.0 | >25.0 |
| X-Pol discrimination (CPR) at boresight, dB | >18.0 | >15.0 | >18 | >18 | >15 |
| Vertical beamwidth (VBW), degrees ¹ | 13.5 | 12.5 | 6.0 | 5.8 | 5.5 |
| Electrical downtilt (EDT) range, degrees | 2-14 | | 0-9 | | |
| First upper side lobe (USLS) suppression, dB ¹ | ≤-15.0 | ≤-15.0 | ≤-16.0 | ≤-16.0 | ≤-16.0 |
| Cross-polar isolation, port-to-port, dB ¹ | 25 | 25 | 25 | 25 | 25 |
| Max VSWR / return loss, dB | 1.5:1 / -14.0 | | 1.5:1 / -14.0 | | |
| Max passive intermodulation (PIM), 2x20W carrier, dBc | -153 | | -153 | | |
| Max input power per any port, watts | 300 | | 250 | | |
| Total composite power all ports (1-10), watts | | | 1500 | | |

¹ Typical value over frequency and tilt



MX10FIT645-xx

NWAV™ X-Pol Ten-Port Antenna

| Electrical specification (minimum/maximum) | Ports 7, 8, 9, 10 | | | |
|---|------------------------------------|-----------|-----------|-----------|
| Frequency bands, MHz | 3400-3550 | 3550-3700 | 3700-3950 | 3950-4200 |
| Polarization | ± 45° | | | |
| Average gain over all tilts, dBi | 13.0 | 13.4 | 13.7 | 14.0 |
| Horizontal beamwidth (HBW), degrees | 50 | 48 | 46 | 42 |
| Front-to-back ratio, co-polar power @180°± 30°, dB | >22 | >22 | >22 | >22 |
| Vertical beamwidth (VBW), degrees ¹ | 25 | 24 | 23 | 22 |
| Electrical downtilt (EDT) range, degrees | 2-12 orderable in 1 deg increments | | | |
| First upper side lobe (USLS) suppression, dB ¹ | ≤-15 | ≤-15 | ≤-15 | ≤-15 |
| Cross-polar isolation, port-to-port, dB ¹ | 25 | 25 | 25 | 25 |
| Max VSWR / return loss, dB | 1.5:1 / -14.0 | | | |
| Max input power per any port, watts | 100 | | | |
| Total composite power all ports (1-10), watts | 1500 | | | |


¹ Typical value over frequency and tilt

* For ports 7-10, the electrical downtilt is FET configured with internal RET, where the required electrical downtilt is defined at the time of order per the ordering information below.

| Ordering information | |
|--|---|
| Antenna model | Description |
| MX10FIT645-xx (xx represents the FET in one degree increments for 3.4-4.2 GHz) | 6F X- Pol 10 Port FIT 45° 2-14°/ 0-9°/ 2-12°, 4.3-10 & SBTs xx=02 thru 12 for each 1 degree tilt 3.4-4.2GHz Examples: MX10FIT645-02 – 2deg, MX10FIT645-09 – 9deg, MX10FIT645-12-12deg |
| Optional accessories | |
| AISG cables | M/F cables for AISG connections |
| PCU-1000 RET controller | Stand-alone controller for RET control and configurations |
| 91900314-02 | Dual Mount Bracket (see 91900314 bracket document for details) |

Mechanical specifications

| | |
|--|-----------------------------------|
| Dimensions height/width/depth, inches (mm) | 70.9/ 15/ 7.4 (1801/ 381/ 188) |
| Shipping dimensions length/width/height, inches (mm) | 76.2/ 23.8/ 14.5 (1935/ 605/ 368) |
| No. of RF input ports, connector type, and location | 10 x 4.3-10 female, bottom |
| RF connector torque | 96 lbf-in (10.85 N·m or 8 lbf-ft) |
| Net antenna weight, lb (kg) | 52.8 (24) |
| Shipping weight, lb (kg) | 92.8 (42.1) |
| Antenna mounting and downtilt kit included with antenna | 91900318 |
| Net weight of the mounting and downtilt kit, lb (kg) | 18 (8.2) |
| Range of mechanical up/down tilt | -2° to 12° |
| Rated wind survival speed, mph (km/h) | 150 (241) |
| Frontal and lateral wind loading @ 150 km/h, lbf (N) | 157.3 (699.7), 56.9 (253.1) |
| EPA frontal and lateral, ft ² , (m ²) | 7.1 (0.66), 2.6 (0.24) |

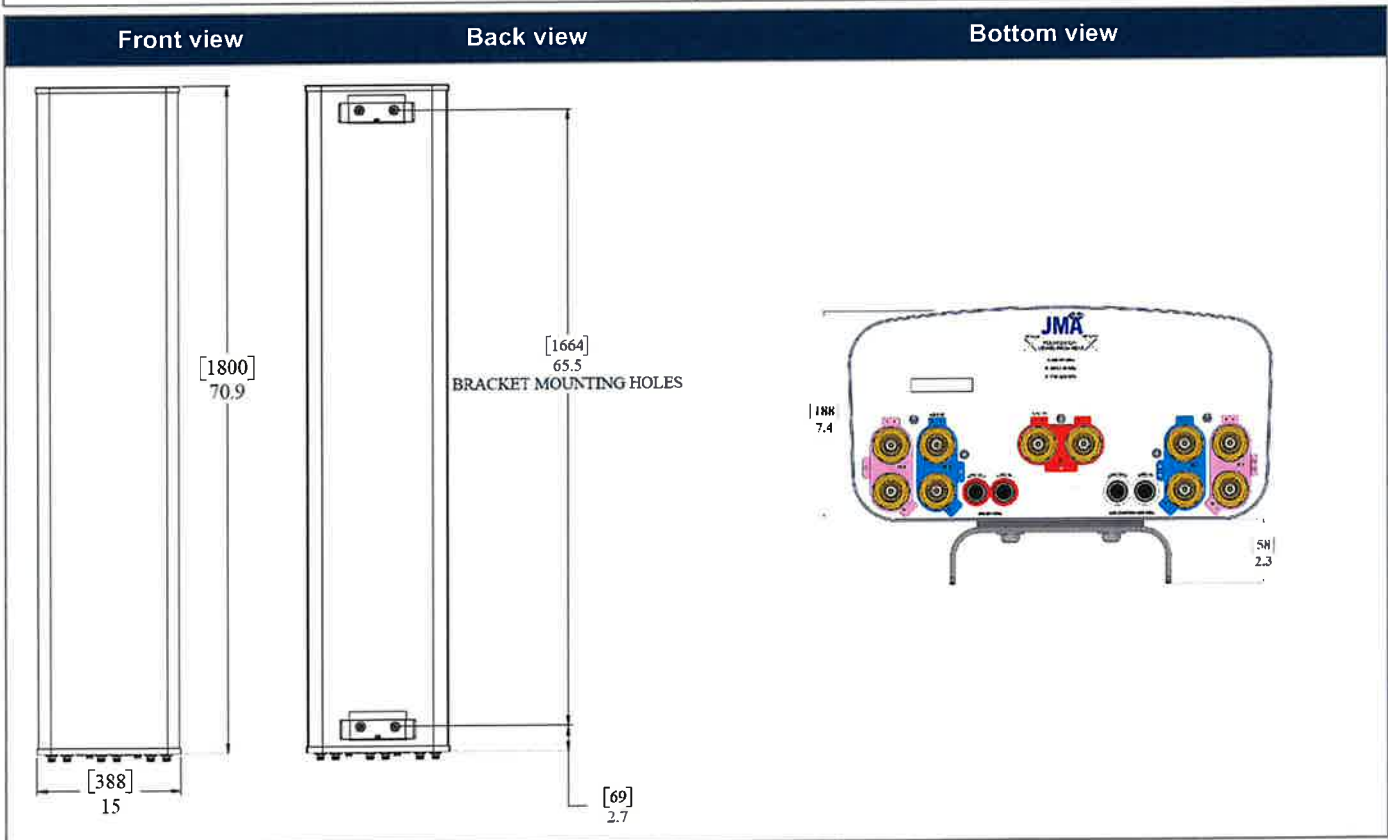


Remote electrical tilt (RET 1000) information

| | |
|--|---|
| RET location | Integrated into antenna |
| RET interface connector type | 8-pin AISG connector per IEC 60130-9 or RF port bias-t |
| RET connector torque | Min 0.5 N·m to max 1.0 N·m (hand pressure & finger tight) |
| RET interface connector quantity | 2 pairs of AISG male/female connectors and 2 RFport bias-ts |
| RET interface connector location | Bottom of the antenna |
| Total no. of internal RETs 698-894 MHz | 1 |
| Total no. of internal RETs 1695-2180 MHz | 1 |
| Total no. of internal RETs 3400-4200 MHz | 1 |
| RET input operating voltage, vdc | 10-30 |
| RET max power consumption, idle state, W | ≤ 2.0 |
| RET max power consumption, normal operating conditions, W | ≤ 13.0 |
| RET communication protocol | AISG 2.0 / 3GPP |

RET and RF connector topology

Each RET device can be controlled either via the designated external AISG connector or RF smart bias-t port as shown below:

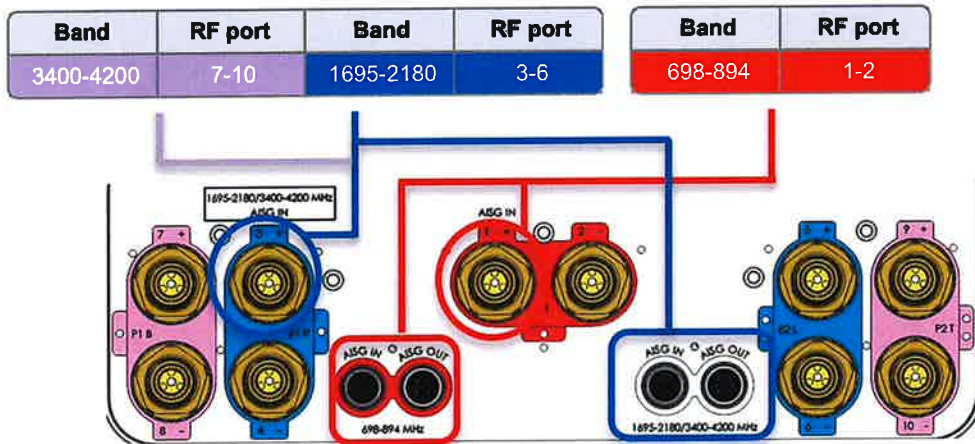

Note: The RET Device for 3400-4200 MHz is connected via the 1695-2180 Port 3 Bias T port or 1695-2180/3400-4200 MHz AISG ports.

Array topology

| 5 sets of radiating arrays R1: 698-894 MHz B1: 1695-2180 MHz B2: 1695-2180 MHz P1: 3400-4200 MHz P2: 3400-4200 MHz | <table border="1"> <thead> <tr> <th>Band</th> <th>RF port</th> </tr> </thead> <tbody> <tr> <td>698-894</td> <td>1-2</td> </tr> <tr> <td>1695-2180</td> <td>3-4</td> </tr> <tr> <td>1695-2180</td> <td>5-6</td> </tr> <tr> <td>3400-4200</td> <td>7-8</td> </tr> <tr> <td>3400-4200</td> <td>9-10</td> </tr> </tbody> </table> | Band | RF port | 698-894 | 1-2 | 1695-2180 | 3-4 | 1695-2180 | 5-6 | 3400-4200 | 7-8 | 3400-4200 | 9-10 | |
|---|---|---------|---------|---------|-----|-----------|-----|-----------|-----|-----------|-----|-----------|------|--|
| | Band | RF port | | | | | | | | | | | | |
| | 698-894 | 1-2 | | | | | | | | | | | | |
| | 1695-2180 | 3-4 | | | | | | | | | | | | |
| | 1695-2180 | 5-6 | | | | | | | | | | | | |
| | 3400-4200 | 7-8 | | | | | | | | | | | | |
| | 3400-4200 | 9-10 | | | | | | | | | | | | |



C Squared Systems, LLC
65 Dartmouth Drive
Auburn, NH 03032
603-644-2800
support@csquaredsystems.com

Calculated Radio Frequency Exposure

Plattsville Relo – Temporary Tower
5151 Park Avenue, Fairfield, CT 06825

October 6, 2022

Table of Contents

| | |
|--|---|
| 1. Introduction..... | 1 |
| 2. FCC Guidelines for Evaluating RF Radiation Exposure Limits..... | 1 |
| 3. RF Exposure Calculation Methods..... | 2 |
| 4. Calculation Results..... | 3 |
| 5. Conclusion..... | 4 |
| 6. Statement of Certification..... | 4 |
| Attachment A: References..... | 5 |
| Attachment B: FCC Limits for Maximum Permissible Exposure (MPE)..... | 6 |

List of Tables

| | |
|---|---|
| Table 1: Carrier Information..... | 3 |
| Table 2: FCC Limits for Maximum Permissible Exposure (MPE)..... | 6 |

List of Figures

| | |
|---|---|
| Figure 1: Graph of FCC Limits for Maximum Permissible Exposure (MPE)..... | 7 |
|---|---|

1. Introduction

The purpose of this report is to investigate compliance with applicable FCC regulations for the proposed modification of the Verizon Wireless antenna arrays on a new temporary monopole tower located at 5151 Park Avenue in Fairfield, CT. The coordinates of the tower are 41.220258 N, 73.247433 W.

This report considers the planned antenna configuration for AT&T, Verizon Wireless and T-Mobile to derive the resulting % Maximum Permissible Exposure of its proposed installation.

2. FCC Guidelines for Evaluating RF Radiation Exposure Limits

In 1985, the FCC established rules to regulate radio frequency (RF) exposure from FCC licensed antenna facilities. In 1996, the FCC updated these rules, which were further amended in August 1997 by OET Bulletin 65 Edition 97-01. These new rules include Maximum Permissible Exposure (MPE) limits for transmitters operating between 300 kHz and 100 GHz. The FCC MPE limits are based upon those recommended by the National Council on Radiation Protection and Measurements (NCRP), developed by the Institute of Electrical and Electronics Engineers, Inc., (IEEE) and adopted by the American National Standards Institute (ANSI).

The FCC general population/uncontrolled limits set the maximum exposure to which most people may be subjected. General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

Public exposure to radio frequencies is regulated and enforced in units of milliwatts per square centimeter (mW/cm^2). The general population exposure limits for the various frequency ranges are defined in the attached "FCC Limits for Maximum Permissible Exposure (MPE)" in Attachment B of this report.

Higher exposure limits are permitted under the occupational/controlled exposure category, but only for persons who are exposed as a consequence of their employment and who have been made fully aware of the potential for exposure, and they must be able to exercise control over their exposure. General population/uncontrolled limits are five times more stringent than the levels that are acceptable for occupational, or radio frequency trained individuals. Attachment B contains excerpts from OET Bulletin 65 and defines the Maximum Exposure Limit.

Finally, it should be noted that the MPE limits adopted by the FCC for both general population/uncontrolled exposure and for occupational/controlled exposure incorporate a substantial margin of safety and have been established to be well below levels generally accepted as having the potential to cause adverse health effects.

3. RF Exposure Calculation Methods

The power density calculation results were generated using the following formula as outlined in FCC bulletin OET 65, and Connecticut Siting Council recommendations:

$$\text{Power Density} = \left(\frac{1.6^2 \times 1.64 \times \text{ERP}}{4\pi \times R^2} \right) \times \text{Off Beam Loss}$$

Where:

ERP = Effective Radiated Power

R = Radial Distance = $\sqrt{(H^2 + V^2)}$

H = Horizontal Distance from antenna

V = Vertical Distance from radiation center of antenna

Ground reflection factor of 1.6

Off Beam Loss is determined by the selected antenna pattern

These calculations assume that the antennas are operating at 100 percent capacity and power, and that all antenna channels are transmitting simultaneously. Obstructions (trees, buildings, etc.) that would normally attenuate the signal are not taken into account. The calculations assume even terrain in the area of study and do not consider actual terrain elevations which could attenuate the signal. As a result, the predicted signal levels reported below are much higher than the actual signal levels will be from the final installations.

4. Calculation Results

Table 1 below outlines the cumulative power density information for the AT&T, Verizon Wireless and T-Mobile equipment at the site. The proposed antennas are directional in nature; therefore, the majority of the RF power is focused out towards the horizon. As a result, there will be less RF power directed below the antennas relative to the horizon, and consequently lower power density levels around the base of the tower. Please refer to Attachment C for the vertical pattern of the proposed AT&T antennas. The calculated results in Table 1 include a nominal 10 dB off-beam pattern loss to account for the lower relative gain below the antennas.

| Carrier | Antenna Height (Feet) | Operating Frequency (MHz) | Number of Trans. | ERP Per Transmitter (Watts) | Power Density (mw/cm ²) | Limit | % MPE |
|----------|-----------------------|---------------------------|------------------|-----------------------------|-------------------------------------|--------------|---------------|
| AT&T | 110 | 763 | 1 | 3541 | 0.0118 | 0.5087 | 2.32% |
| AT&T | 110 | 885 | 1 | 3883 | 0.0129 | 0.5900 | 2.19% |
| AT&T | 110 | 1900 | 2 | 4562 | 0.0303 | 1.0000 | 3.03% |
| AT&T | 110 | 2100 | 2 | 8226 | 0.0547 | 1.0000 | 5.47% |
| AT&T | 110 | 2300 | 1 | 6747 | 0.0224 | 1.0000 | 2.24% |
| T-Mobile | 90 | 2100 | 1 | 6153 | 0.0314 | 1.0000 | 3.14% |
| T-Mobile | 90 | 1900 | 1 | 6013 | 0.0307 | 1.0000 | 3.07% |
| T-Mobile | 90 | 1900 | 1 | 376 | 0.0019 | 1.0000 | 0.19% |
| T-Mobile | 90 | 600 | 1 | 826 | 0.0042 | 0.4000 | 1.05% |
| T-Mobile | 90 | 600 | 1 | 1652 | 0.0084 | 0.4000 | 2.11% |
| T-Mobile | 90 | 700 | 1 | 826 | 0.0042 | 0.4667 | 0.90% |
| T-Mobile | 90 | 2500 | 1 | 4488 | 0.0229 | 1.0000 | 2.29% |
| T-Mobile | 90 | 2500 | 1 | 4488 | 0.0229 | 1.0000 | 2.29% |
| T-Mobile | 90 | 2500 | 1 | 22440 | 0.1144 | 1.0000 | 11.44% |
| Verizon | 121.7 | 3500 | 1 | 543 | 0.0015 | 1.0000 | 0.15% |
| Verizon | 121.7 | 700 | 1 | 944 | 0.0025 | 0.4667 | 0.83% |
| Verizon | 121.7 | 850 | 1 | 861 | 0.0023 | 0.5667 | 0.67% |
| Verizon | 121.7 | 850 | 1 | 861 | 0.0023 | 0.5667 | 0.67% |
| Verizon | 121.7 | 1900 | 1 | 1303 | 0.0035 | 1.0000 | 0.71% |
| Verizon | 121.7 | 2100 | 1 | 1566 | 0.0042 | 1.0000 | 0.81% |
| | | | | | | Total | 45.57% |

Table 1: Carrier Information

5. Conclusion

The above analysis concludes that RF exposure at ground level from the proposed site will be below the maximum power density levels as outlined by the FCC in the OET Bulletin 65 Ed. 97-01. Using conservative calculation methods, the highest expected percent of Maximum Permissible Exposure at ground level is **45.57% of the FCC General Population/Uncontrolled limit.**

As noted previously, the calculated % MPE levels are more conservative (higher) than the actual signal levels will be from the finished modifications.

6. Statement of Certification

I certify to the best of my knowledge that the statements in this report are true and accurate. The calculations follow guidelines set forth in FCC OET Bulletin 65 Edition 97-01, ANSI/IEEE Std. C95.1 and ANSI/IEEE Std. C95.3.



Reviewed/Approved By: _____
Martin J. Lavin
Senior RF Engineer
C Squared Systems, LLC

October 6, 2022
Date

Attachment A: References

OET Bulletin 65 - Edition 97-01 - August 1997 Federal Communications Commission Office of Engineering & Technology

IEEE C95.1-2005, IEEE Standard Safety Levels With Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz IEEE-SA Standards Board

IEEE C95.3-2002 (R2008), IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to Such Fields, 100 kHz-300 GHz IEEE-SA Standards Board

Attachment B: FCC Limits for Maximum Permissible Exposure (MPE)

(A) Limits for Occupational/Controlled Exposure¹

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (E) (A/m) | Power Density (S) (mW/cm ²) | Averaging Time E ² , H ² or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|---|---|
| 0.3-3.0 | 614 | 1.63 | (100)* | 6 |
| 3.0-30 | 1842/f | 4.89/f | (900/f ²)* | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1500 | - | - | f/300 | 6 |
| 1500-100,000 | - | - | 5 | 6 |

(B) Limits for General Population/Uncontrolled Exposure²

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (E) (A/m) | Power Density (S) (mW/cm ²) | Averaging Time E ² , H ² or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|---|---|
| 0.3-1.34 | 614 | 1.63 | (100)* | 30 |
| 1.34-30 | 824/f | 2.19/f | (180/f ²)* | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | - | - | f/1500 | 30 |
| 1500-100,000 | - | - | 1.0 | 30 |

f = frequency in MHz * Plane-wave equivalent power density

Table 2: FCC Limits for Maximum Permissible Exposure (MPE)

¹ Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure

² General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure

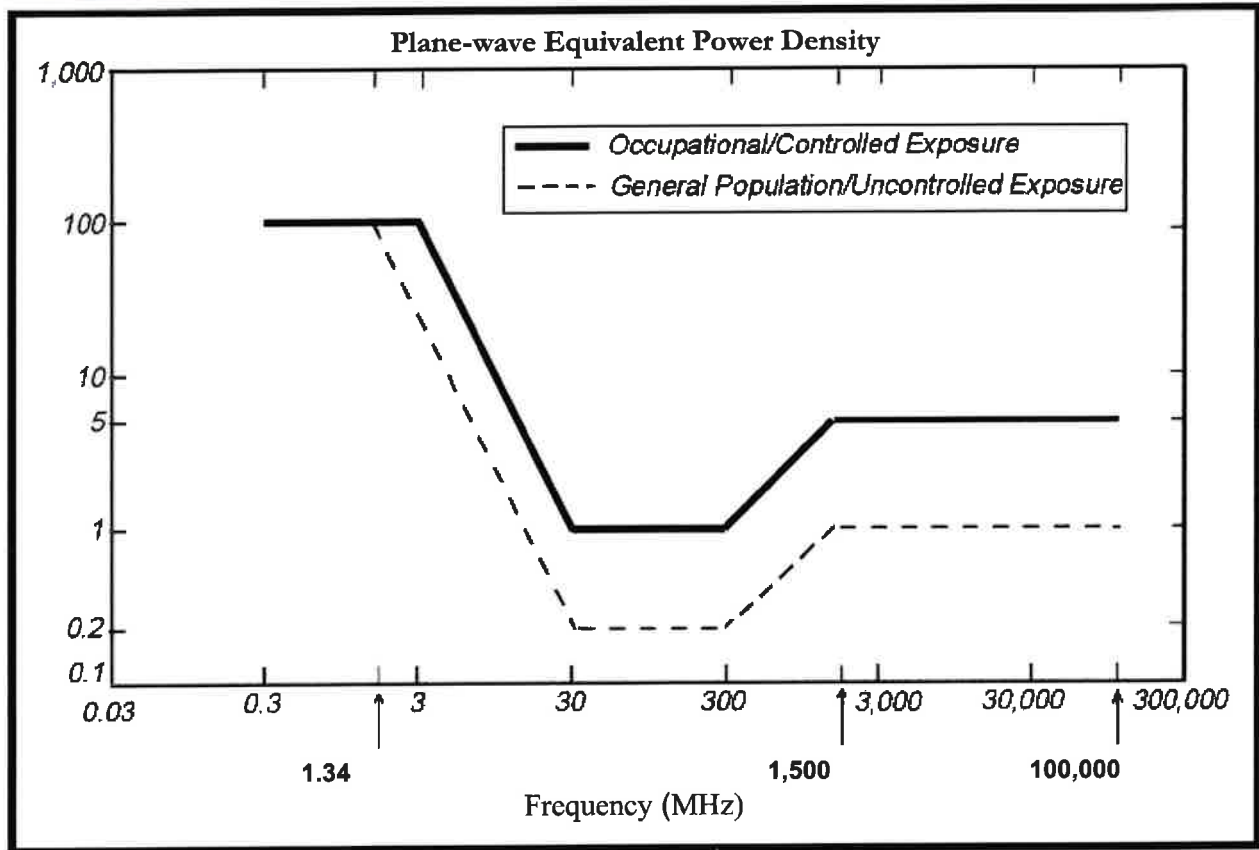


Figure 1: Graph of FCC Limits for Maximum Permissible Exposure (MPE)