



144HC M10 SL Bifacial Module

144 Half-Cut Monocrystalline 520W – 540W

21%

Utilizes the latest M10 size super high efficiency Monocrystalline PERC cells. Half cut design further reduces cell to module (CTM) losses.

Stability & Looks

Rugged, double webbed frame design withstands wind, snow, and other mechanical stresses. Framed Glass-Backsheet aesthetic is ideal for high visibility installation.

Anti-Reflective


Premium solar glass with anti reflective coating delivers more energy throughout the day

High Reliability

Proven resistance to PID and reliable in high temperature and humidity environments.

No Compromise Guarantee

15 Year Workmanship Warranty
25 Year Linear Performance Guarantee

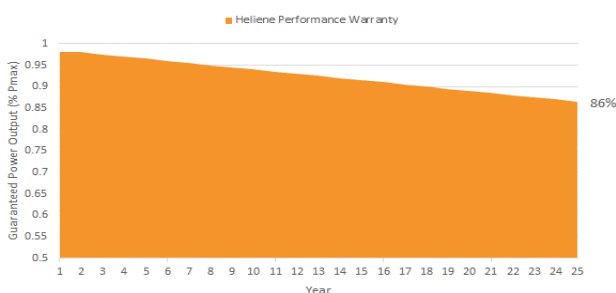

Manufactured Using International Quality System Standards: ISO9001

Half-Cut Design with Split Junction Box Technology

Bifacial Technology Enabling Additional Energy Harvest from Rear Side

1500V System Voltage Rating

World-class Quality

- Heliene's fully automated manufacturing facilities with state-of-the-art robotics and computer aided inspection systems ensure the highest level of product quality and consistency
- All manufacturing locations are compliant with international quality standards and are ISO 9001 certified
- Heliene modules have received Top Performer rankings in several categories from PV Evolution Labs (PV EL) independent quality evaluations

Bankable Reputation

- Established in 2010, Heliene is recognized as highly bankable Tier 1 manufacturer of solar modules and has been approved for use by the U.S. Department of Defense, U.S. Army Corps of Engineers and from numerous top tier utility scale project debt providers
- By investing heavily in research and development, Heliene has been able to stay on the cutting edge of advances in module technology and manufacturing efficiency


Local Sales, Service, and Support

- With sales offices across the U.S. and Canada, Heliene prides itself on unsurpassed customer support for our clients. Heliene has become the brand of choice for many of the leading residential installers, developers and Independent Power Producers due to our innovative technology, product customization capability and just in time last-mile logistics support
- Local sales and customer support means answered phone calls and immediate answers to your technical and logistics questions. We understand your project schedules often change with little warning and endeavor to work with you to solve your project management challenges







Dimensions for 144HC M10 SL Bifacial Series Modules

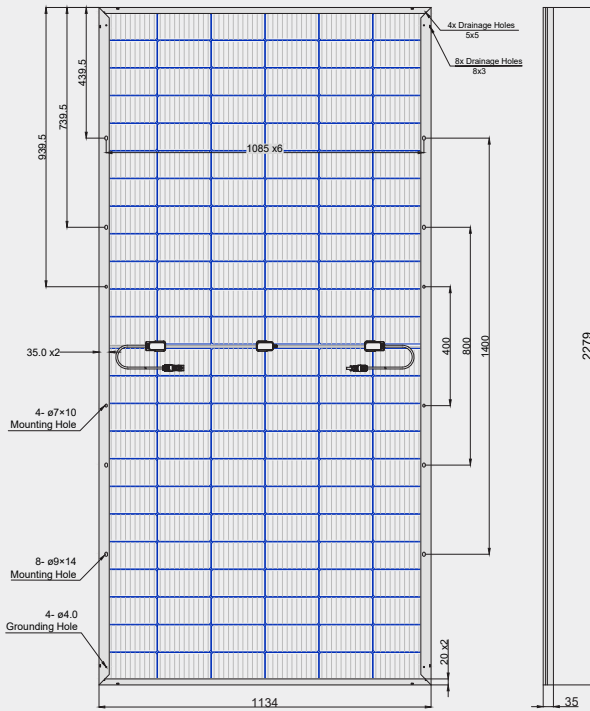

I-V Curves for 144HC M10 SL Bifacial Series Modules

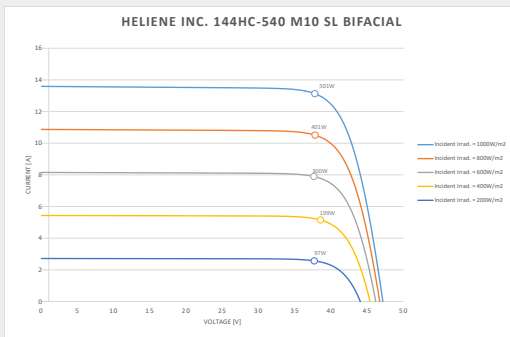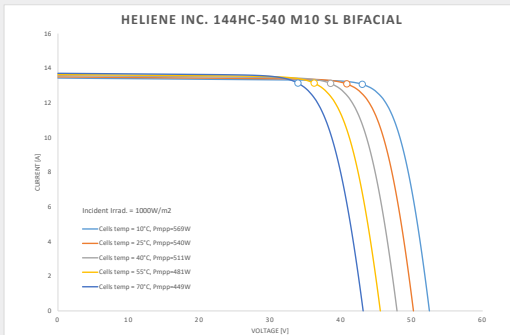

Certifications & Listing



Electrical Data (STC)

| | | | | | | |
|----------------------------|---------------------|-----------|-------|-------|-------|-------|
| Peak Rated Power | P _{mp} (W) | 540 | 535 | 530 | 525 | 520 |
| Maximum Power Voltage | V _{mp} (V) | 42.32 | 42.13 | 41.94 | 41.75 | 41.56 |
| Maximum Power Current | I _{mp} (A) | 12.77 | 12.70 | 12.64 | 12.58 | 12.52 |
| Open Circuit Voltage | V _{oc} (V) | 50.22 | 49.97 | 49.72 | 49.23 | 48.73 |
| Short Circuit Current | I _{sc} (A) | 13.50 | 13.44 | 13.37 | 13.32 | 13.28 |
| Module Efficiency | Eff (%) | 20.9 | 20.7 | 20.5 | 20.3 | 20.1 |
| Maximum Series Fuse Rating | MF (A) | 30 | 30 | 30 | 30 | 30 |
| Power Output Tolerance | | [- 0/+3%] | | | | |
| Bifaciality Factor | | 70% | | | | |

STC - Standard Test Conditions: Irradiation 1000 W/m² - Air mass AM 1.5 - Cell temperature 25 °C

Electrical Data (NMOT)

| | | | | | | |
|-----------------------|---------------------|-------|-------|-------|-------|-------|
| Maximum Power | P _{mp} (W) | 400 | 395 | 390 | 385 | 380 |
| Maximum Power Voltage | V _{mp} (V) | 39.19 | 38.58 | 38.58 | 37.97 | 37.96 |
| Maximum Power Current | I _{mp} (A) | 10.21 | 10.24 | 10.11 | 10.14 | 10.01 |
| Open Circuit Voltage | V _{oc} (V) | 47.13 | 46.89 | 46.66 | 46.20 | 45.73 |
| Short Circuit Current | I _{sc} (A) | 10.87 | 10.82 | 10.77 | 10.72 | 10.70 |

NMOT - Nominal Module Operating Temperature:
Irradiance at 800W/m², Ambient Temperature 20°C, Wind speed 1m/s

Mechanical Data

| | |
|------------------------|--|
| Solar Cells | 144 Half Cut, M10, 182mm, PERC Cells |
| Module Construction | Framed Glass-Backsheet |
| Dimensions (L x W x D) | 2279 x 1134 x 35 mm (89.72 x 44.65 x 1.38 inch) |
| Weight | 29.2 kg (64.3 lbs) |
| Frame | Double Webbed 15-Micron Anodized Aluminum Alloy |
| Glass | 3.2mm Low-Iron Content, High-Transmission, PV Solar Glass with Anti Reflective Coating |
| Junction Box | IP-68 rated with 3 bypass diodes |
| Output Cables | 0.3-meter Symmetrical Cables |
| Connectors | Multi-Contact/ Stäubli MC4 |

Certifications

UL Certification

UL61215, UL61730

Temperature Ratings

| | |
|---|--------------|
| Nominal Operating Cell Temperature (NOCT) | +45°C (±2°C) |
| Temperature Coefficient of P _{max} | -0.36%/°C |
| Temperature Coefficient of V _{oc} | -0.28%/°C |
| Temperature Coefficient of I _{sc} | 0.034%/°C |

Maximum Ratings

| | |
|-------------------------|-------------------|
| Operational Temperature | -40°C to +85°C |
| Max System Voltage | 1500V |
| Mech. Load Test (Front) | 113 psf / 5400 Pa |
| Mech. Load Test (Back) | 50 psf / 2400 Pa |
| Fire Type | Type 1 |

Warranty

| |
|--------------------------------|
| 15 Year Workmanship Warranty |
| 25 Year Linear Power Guarantee |

Packaging Configuration

| | |
|----------------------------|------------|
| Modules per box: | 31 pieces |
| Modules per 40' Container: | 620 pieces |
| Modules per 53' Trailer: | 806 pieces |



SOLECTRIA® XGI 1500-166 SERIES

PREMIUM 3-PHASE TRANSFORMERLESS UTILITY-SCALE INVERTERS

FEATURES

- Made in the USA with global components
- Buy American Act (BAA) compliant
- Four models:
 - 125kW/125kVA,
 - 125kW/150kVA,
 - 150kW/166kVA,
 - 166kW/166kVA
- Additional models available certified to UL1699b, Photovoltaic DC Arc-Fault Circuit Protection
- 99.0% peak efficiency
- Flexible solution for distributed and centralized system architecture
- Advanced grid-support functionality Rule 21/UL1741SA
- Robust, dependable, & built to last
- Lowest O&M and installation costs
- Access all inverters on site via WiFi from one location
- Remote diagnostics and firmware upgrades
- SunSpec Modbus Certified
- Tested compatible with the TESLA PowerPack Microgrid System app for system visibility

OPTIONS

- String combiners for distributed and centralized systems
- Web-based monitoring
- Extended warranty



Yaskawa Solectria Solar's XGI 1500 utility-scale string inverters are designed for high reliability and built of the highest quality components that were selected, tested and proven to last beyond their warranty.

XGI 1500 inverters provide advanced grid-support functionality and meet the latest IEEE 1547 and UL 1741 standards for safety. They are the most powerful 1500 VDC string inverters in the PV market and have been engineered for both distributed and centralized system architecture.

Designed and engineered in Lawrence, MA, XGI inverters are assembled and tested at Yaskawa America's facilities in Buffalo Grove, IL. They are Made in the USA with global components and are compliant with the Buy American Act.

SOLECTRIA® XGI 1500-166 SERIES TECHNICAL DATA

SPECIFICATIONS

| SOLECTRIA XGI 1500 Model | | XGI 1500-125/125-UL XGI 1500-125/125-UL-A | XGI 1500-125/150-UL XGI 1500-125/150-UL-A | XGI 1500-150/166-UL XGI 1500-150/166-UL-A | XGI 1500-166/166-UL XGI 1500-166/166-UL-A |
|--------------------------|--|--|--|--|--|
| DC Input | Absolute Max Input Voltage | 1500 VDC | 1500 VDC | 1500 VDC | 1500 VDC |
| | Max Power Input Voltage Range (MPPT) | 860-1250 VDC | 860-1250 VDC | 860-1250 VDC | 860-1250 VDC |
| | Operating Voltage Range (MPPT) | 860-1450 VDC | 860-1450 VDC | 860-1450 VDC | 860-1450 VDC |
| | Number of MPP Trackers | 1 MPPT | 1 MPPT | 1 MPPT | 1 MPPT |
| | Max Operating Input Current | 148.3 A | 148.3 A | 178.0 A | 197.7 A |
| | Max Operating PV Power | 128 kW | 128 kW | 153 kW | 170 kW |
| | Max DC/AC Ratio Max Rated PV Power | 2.6 332 kW | 2.6 332 kW | 2.2 332 kW | 2.0 332 kW |
| | Max Rated PV Short-Circuit Current ($\Sigma I_{sc} \times 1.25$) | 500 A | 500 A | 500 A | 500 A |
| AC Output | Nominal Output Voltage | 600 VAC, 3-Ph | 600 VAC, 3-Ph | 600 VAC, 3-Ph | 600 VAC, 3-Ph |
| | AC Voltage Range | -12% to +10% | -12% to +10% | -12% to +10% | -12% to +10% |
| | Continuous Real Output Power | 125 kW | 125 kW | 150 kW | 166 kW |
| | Continuous Apparent Output Power | 125 kVA | 150 kVA | 166 kVA | 166 kVA |
| | Max Output Current | 120 A | 144 A | 160 A | 160 A |
| | Nominal Output Frequency | 60 Hz | 60 Hz | 60 Hz | 60 Hz |
| | Power Factor (Unity default) | +/- 0.80 Adjustable | +/- 0.80 Adjustable | +/- 0.80 Adjustable | +/- 0.80 Adjustable |
| | Total Harmonic Distortion (THD) @ Rated Load | <3% | <3% | <3% | <3% |
| | Grid Connection Type | 3-Ph + N/GND | 3-Ph + N/GND | 3-Ph + N/GND | 3-Ph + N/GND |
| | Fault Current Contribution (1 cycle RMS) | 144 A | 173 A | 192 A | 192 A |
| | Efficiency | Peak Efficiency | 98.9% | 98.9% | 99.0% |
| CEC Average Efficiency | | 98.5% | 98.5% | 98.5% | 98.5% |
| Tare Loss | | <1 W | <1 W | <1 W | <1 W |
| Temperature | Ambient Temp Range | -40°F to 140°F (-40C to 60C) | | -40°F to 140°F (-40C to 60C) | |
| | De-Rating Temperature | 122°F (50C) | | 113°F (45C) | |
| | Storage Temperature Range | -40°F to 167°F (-40C to 75C) | | -40°F to 167°F (-40C to 75C) | |
| | Relative Humidity (non-condensing) | 0 - 95% | | 0 - 95% | |
| | Operating Altitude | Full Power up to 9,840 ft (3.0 km); De-Rate to 70% of Full Power at 13,123 ft (4.0 km) | | | |
| Communications | Advanced Graphical User Interface | WiFi | | | |
| | Communication Interface | Ethernet | | | |
| | Third-Party Monitoring Protocol | SunSpec Modbus TCP/IP | | | |
| | Web-Based Monitoring | Optional | | | |
| | Firmware Updates | Remote and Local | | | |
| Testing & Certifications | Safety Listings & Certifications | UL 1741, IEEE 1547, UL 1998 (All models) UL 1699b Photovoltaic Arc-Fault Circuit Protection Certified (-A models) | | | |
| | Advanced Grid Support Functionality | Rule 21, UL 1741SA | | | |
| | Testing Agency | ETL | | | |
| Warranty | FCC Compliance | FCC Part 15 (Subpart B, Class A) | | | |
| | Standard and Options | 5 Years Standard; Option for 10 Years | | | |
| Enclosure | Acoustic Noise Rating | 73 dBA @ 1 m ; 67dBA @ 3 m | | | |
| | DC Disconnect | Integrated 2-Pole 250 A DC Disconnect | | | |
| | Mounting Angle | Vertical only | | | |
| | Dimensions | Height: 29.5 in. (750 mm) Width: 39.4 in. (1000 mm) Depth: 15.1 in. (380 mm) | | | |
| | Weight | 270 lbs (122 kg) | | | |
| | Enclosure Rating and Finish | Type 4X, Polyester Powder-Coated Aluminum | | | |

