



STATE OF CONNECTICUT

CONNECTICUT SITING COUNCIL

Ten Franklin Square, New Britain, CT 06051

Phone: (860) 827-2935 Fax: (860) 827-2950

E-Mail: siting.council@ct.gov

www.ct.gov/csc

VIA ELECTRONIC MAIL

February 27, 2019

Nora Oliver
Empire Telecom USA
16 Esquire Road
Billerica, MA 01862

RE: **EM-AT&T-131-190204** – AT&T notice of intent to modify an existing telecommunications facility located at 625 Spring Street, Southington, Connecticut.

Dear Ms. Oliver:

The Connecticut Siting Council (Council) is in receipt of your correspondence of February 25, 2019, submitted in response to the Council's February 13, 2019 notification of an incomplete request for exempt modification with regard to the above-referenced matter.

The submission renders the request for exempt modification complete and the Council will process the request in accordance with the Federal Communications Commission 60-day timeframe.

Thank you for your attention and cooperation.

Sincerely,

Melanie A. Bachman
Executive Director

MAB/IN/emr

Robidoux, Evan

From: Nora Oliver <noliver@empiretelecomm.com>
Sent: Monday, February 25, 2019 9:17 AM
To: CSC-DL Siting Council
Subject: FW: Council Incomplete Letter for EM-AT&T-131-190204-SpringSt-Southington/ AT&T Site#CT5250
Attachments: em-at&t-131-190204_incompleteltr_springst.pdf; 876334 Report revised signed.pdf

Hello,

Please find attached the revised Structural Analysis as requested on the attached incomplete letter.

Please let me know if you have any questions.

Thank you
Nora

From: Robidoux, Evan [mailto:Evan.Robidoux@ct.gov]
Sent: Wednesday, February 13, 2019 4:22 PM
To: Nora Oliver <noliver@empiretelecomm.com>
Cc: CSC-DL Siting Council <Siting.Council@ct.gov>
Subject: Council Incomplete Letter for EM-AT&T-131-190204-SpringSt-Southington

Please see the attached correspondence.

Evan Robidoux
Clerk Typist
Connecticut Siting Council
10 Franklin Square
New Britain, CT 06051

Disclaimer: This email is intended only for the use of the individual or entity to which it is addressed, and may contain information that is privileged, confidential and exempt from disclosure under applicable law. If you received this communication in error, please do not distribute it and notify us immediately by email (administrator@qualtekservices.com) or via telephone (484.804.4500) and delete the original message. Unless expressly stated in this email, nothing in this message or any attachment should be construed as a digital or electronic signature.

Date: **February 21, 2019**

Amanda D Brown
Crown Castle
3530 Toringdon Way, Suite 300
Charlotte, NC 28277



Crown Castle
2000 Corporate Drive
Canonsburg, PA
(724) 416-2000

Subject: **Structural Analysis Report**

Carrier Designation: **Verizon Wireless Equipment Swap**
Carrier Site Number: 20702
Carrier Site Name: Southington CT

Crown Castle Designation: **Crown Castle BU Number:** 876334
Crown Castle Site Name: SOUTHINGTON, SMORON
Crown Castle JDE Job Number: 518917
Crown Castle Work Order Number: 1681343
Crown Castle Order Number: 450298 Rev. 0

Engineering Firm Designation: **Crown Castle Project Number:** 1681343

Site Data: **625 Spring Street, SOUTHINGTON, Hartford County, CT**
Latitude 41° 37' 56.9", Longitude -72° 53' 39.3"
160 Foot - Monopole Tower

Dear Amanda D Brown,

Crown Castle is pleased to submit this “**Structural Analysis Report**” to determine the structural integrity of the above mentioned tower.

The purpose of the analysis is to determine acceptability of the tower stress level. Based on our analysis we have determined the tower stress level for the structure and foundation, under the following load case, to be:

LC6.7: Existing Equipment + Maintenance Configuration Change (MCC) **Sufficient Capacity**


The analysis has been performed in accordance with the TIA-222-G Standard as allowed by Section 101.4.7, Existing Buildings, of the 2015 IBC and Section 301.1 Exception of the 2015 IEBC based upon an ultimate 3-second gust wind speed of 125 mph converted to a nominal 3-second gust wind speed of 97 mph per Section 1609.3.1 and Appendix N. Applicable standard references and design criteria are listed in Section 2 - ANALYSIS CRITERIA.

This proposed configuration change is considered maintenance and does not increase the loading or stress rating of the tower and foundation. Therefore, conformance to TIA-222-H is not required.

Structural analysis prepared by: Nicholas Cvetic, E.I.T. / MEH

Respectfully submitted by:

Terry P. Styran, P.E.
Senior Project Engineer



2/21/2019

TABLE OF CONTENTS

1) INTRODUCTION

2) ANALYSIS CRITERIA

Table 1 - Proposed Equipment Configuration

Table 2 - Equipment to be Removed, Not Considered in Analysis

Table 3 - Other Considered Equipment

3) ANALYSIS PROCEDURE

Table 4 - Documents Provided

3.1) Analysis Method

3.2) Assumptions

4) ANALYSIS RESULTS

Table 5 - Section Capacity (Summary)

Table 6 - Tower Component Stresses vs. Capacity - LC6.7

4.1) Recommendations

5) APPENDIX A

tnxTower Output

6) APPENDIX B

Base Level Drawing

7) APPENDIX C

Additional Calculations

1) INTRODUCTION

This tower is a 160 ft monopole tower designed by Summit.

The tower has been modified multiple times in the past to accommodate additional loading.

2) ANALYSIS CRITERIA

TIA-222 Revision:	TIA-222-G
Risk Category:	II
Wind Speed:	97 mph
Exposure Category:	C
Topographic Factor:	1
Ice Thickness:	1 in
Wind Speed with Ice:	50 mph
Seismic Ss:	0.185
Seismic S1:	0.064
Service Wind Speed:	60 mph

Table 1 - Proposed Equipment Configuration

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
132.0	134.0	3	antel	BXA-80080-6CF-EDIN-X w/ Mount Pipe	7 1	1-5/8 1-1/4
	133.0	3	tower mounts	Side-by-Side Mounting Kit [PN. BSAMNT-SBS-2-2]		
		6	andrew	SBNHH-1D65B w/ Mount Pipe		
		3	antel	BXA-70063/6CFx2		
		1	rfs celwave	DB-C1-12C-24AB-0Z		
		1	rfs celwave	DB-T1-6Z-8AB-0Z		
		3	samsung telecommunications	RFV01U-D1A		
		3	samsung telecommunications	RFV01U-D2A		
	132.0	1	tower mounts	Pipe Mount [PM 602-3]		
		1	tower mounts	Sector Mount [SM 503-3]		

Table 2 - Equipment to be Removed, Not Considered in Analysis

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
132.0	133.0	3	alcatel lucent	RRH2X60-AWS	13	1-5/8
		3	alcatel lucent	RRH2X60-PCS		
		3	alcatel lucent	RRH2x60-700		
		1	rfs celwave	DB-T1-6Z-8AB-0Z		
	132.0	1	tower mounts	Platform Mount [LP 712-1]		

Table 3 - Other Considered Equipment

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
156.0	157.0	2	andrew	SBNH-1D6565C	8 6 2 3	1-5/8 3/4 3/8 Conduit
		1	kmw communications	AM-X-CD-16-65-00T-RET		
		3	cci antennas	DTMABP7819VG12A		
		3	ericsson	RRUS 11		
		2	cci antennas	TPA-65R-LCUUUU-H8		
		3	ericsson	RRUS 12		
		3	ericsson	RRUS 32		
		3	ericsson	RRUS 32 B2		
		3	ericsson	RRUS 32 B66		
		3	ericsson	RRUS 4478 B14		
		1	kathrein	80010798 w/ Mount Pipe		
		1	kathrein	80010965 w/ Mount Pipe		
		2	kathrein	80010966 w/ Mount Pipe		
		1	raycap	DC6-48-60-0-8F		
	2	raycap	DC6-48-60-18-8F			
		156.0	3	sabre		
148.0	148.0	3	alcatel lucent	800MHz 2X50W RRH W/FILTER	-	-
		6	alcatel lucent	PCS 1900MHz 4x45W-65MHz		
		1	tower mounts	Side Arm Mount [SO 103-3]		
146.0	147.0	3	alcatel lucent	TD-RRH8x20-25	4	1-1/4
		1	rfs celwave	APXV9ERR18-C-A20 w/ Mount Pipe		
		2	rfs celwave	APXVSP18-C-A20 w/ Mount Pipe		
		3	rfs celwave	APXVTM14-C-120 w/ Mount Pipe		
	146.0	1	crown mounts	Platform Mount [LP 1201-1]		
		3	rfs celwave	IBC1900BB-1		
		3	rfs celwave	IBC1900HG-2A		
		1	tower mounts	Miscellaneous [NA 510-1]		
139.0	139.0	3	rfs celwave	APXV18-206517S-C	6	1-5/8
		1	tower mounts	Pipe Mount [PM 501-3]		
129.0	130.0	3	dragonwave	HORIZON COMPACT	3	1/2
	129.0	1	tower mounts	Side Arm Mount [SO 104-3]		
	127.0	1	andrew	VHLP2-18		
		2	andrew	VHLP800-11		

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
101.0	102.0	1	symmetricom	58532A	1	1/2
	101.0	1	tower mounts	Side Arm Mount [SO 701-1]		

3) ANALYSIS PROCEDURE

Table 4 - Documents Provided

Document	Remarks	Reference	Source
4-TOWER MANUFACTURER DRAWINGS	Paul J. Ford and Company	1614569	CCISITES
4-TOWER FOUNDATION DRAWINGS/DESIGN/SPECS	Paul J. Ford and Company	1999756	CCISITES
4-GEOTECHNICAL REPORTS	FDH	1530919	CCISITES
4-TOWER REINFORCEMENT DESIGN/DRAWINGS/DATA	Paul J. Ford and Company	2588177	CCISITES
4-TOWER REINFORCEMENT DESIGN/DRAWINGS/DATA	Paul J. Ford and Company	3363885	CCISITES
4-TOWER REINFORCEMENT DESIGN/DRAWINGS/DATA	FDH	5288062	CCISITES
4-TOWER REINFORCEMENT DESIGN/DRAWINGS/DATA	FDH	5755362	CCISITES
4-TOWER REINFORCEMENT DESIGN/DRAWINGS/DATA	FDH	6249238	CCISITES
4-TOWER REINFORCEMENT DESIGN/DRAWINGS/DATA	Jacobs	6962729	CCISITES
4-POST-MODIFICATION INSPECTION	Paul J. Ford and Company	2588175	CCISITES
4-POST-MODIFICATION INSPECTION	TEP	3794196	CCISITES
4-POST-MODIFICATION INSPECTION	TEP	5570676	CCISITES
4-POST-MODIFICATION INSPECTION	FDH	5888770	CCISITES
4-POST-MODIFICATION INSPECTION	ETS	6544953	CCISITES
4-POST-MODIFICATION INSPECTION	ETS	7104038	CCISITES

3.1) Analysis Method

tnxTower (version 8.0.4.0), a commercially available analysis software package, was used to create a three-dimensional model of the tower and calculate member stresses for various loading cases. Selected output from the analysis is included in Appendix A.

3.2) Assumptions

- 1) Tower and structures were built and maintained in accordance with the manufacturer's specifications.
- 2) The configuration of antennas, transmission cables, mounts and other appurtenances are as specified in Tables 1 and 2 and the referenced drawings.
- 3) The existing base plate grout was not considered in this analysis.

This analysis may be affected if any assumptions are not valid or have been made in error. Crown Castle should be notified to determine the effect on the structural integrity of the tower.

4) ANALYSIS RESULTS

Table 5 - Section Capacity (Summary)

Elevation (ft)	Component Type	Size	Critical Element	% Capacity	Pass / Fail
160 - 155	Pole	TP16x16x0.375	Pole	9.1%	Pass
155 - 150	Pole	TP16x16x0.375	Pole	31.4%	Pass
150 - 146	Pole	TP16x16x0.375	Pole	51.4%	Pass
146 - 141	Pole	TP22.924x22x0.25	Pole	37.7%	Pass
141 - 136	Pole	TP23.848x22.924x0.25	Pole	50.7%	Pass
136 - 131	Pole	TP24.772x23.848x0.25	Pole	64.8%	Pass
131 - 126	Pole	TP25.696x24.772x0.25	Pole	80.8%	Pass
126 - 121	Pole	TP26.62x25.696x0.25	Pole	95.7%	Pass
121 - 120.1	Pole	TP26.786x26.62x0.25	Pole	98.3%	Pass
120.1 - 119.85	Pole + Reinf.	TP26.833x26.786x0.4875	Reinf. 21 Tension Rupture	69.9%	Pass
119.85 - 117.5	Pole + Reinf.	TP27.267x26.833x0.4875	Reinf. 21 Tension Rupture	74.6%	Pass
117.5 - 117.25	Pole + Reinf.	TP27.313x27.267x0.5	Reinf. 22 Tension Rupture	69.5%	Pass
117.25 - 115.5	Pole + Reinf.	TP27.637x27.313x0.5	Reinf. 22 Tension Rupture	72.7%	Pass
115.5 - 115.25	Pole + Reinf.	TP27.683x27.637x0.6625	Reinf. 1 Tension Rupture	64.1%	Pass
115.25 - 110.25	Pole + Reinf.	TP28.607x27.683x0.65	Reinf. 1 Tension Rupture	71.8%	Pass
110.25 - 107.5	Pole + Reinf.	TP29.808x28.607x0.6375	Reinf. 1 Tension Rupture	75.8%	Pass
107.5 - 102.5	Pole + Reinf.	TP29.074x28.082x0.7125	Reinf. 1 Tension Rupture	78.9%	Pass
102.5 - 100.5	Pole + Reinf.	TP29.471x29.074x0.7	Reinf. 1 Tension Rupture	81.3%	Pass
100.5 - 100.25	Pole + Reinf.	TP29.521x29.471x0.6375	Reinf. 21 Tension Rupture	83.1%	Pass
100.25 - 98.5	Pole + Reinf.	TP29.868x29.521x0.6375	Reinf. 21 Tension Rupture	85.1%	Pass
98.5 - 98.25	Pole + Reinf.	TP29.917x29.868x0.6625	Reinf. 23 Tension Rupture	81.4%	Pass
98.25 - 93.25	Pole + Reinf.	TP30.909x29.917x0.65	Reinf. 23 Tension Rupture	86.5%	Pass
93.25 - 90.5	Pole + Reinf.	TP31.455x30.909x0.65	Reinf. 23 Tension Rupture	89.1%	Pass
90.5 - 90.25	Pole + Reinf.	TP31.504x31.455x0.6875	Reinf. 23 Tension Rupture	87.9%	Pass
90.25 - 85.25	Pole + Reinf.	TP32.496x31.504x0.675	Reinf. 23 Tension Rupture	92.4%	Pass
85.25 - 83.5	Pole + Reinf.	TP32.843x32.496x0.6625	Reinf. 23 Tension Rupture	93.9%	Pass
83.5 - 83.25	Pole + Reinf.	TP32.893x32.843x0.9125	Reinf. 6 Tension Rupture	71.1%	Pass
83.25 - 80.75	Pole + Reinf.	TP33.389x32.893x0.9	Reinf. 6 Tension Rupture	72.8%	Pass

80.75 - 80.5	Pole + Reinf.	TP33.439x33.389x1.0625	Reinf. 6 Tension Rupture	59.8%	Pass
80.5 - 80.25	Pole + Reinf.	TP33.488x33.439x0.9875	Reinf. 11 Tension Rupture	64.3%	Pass
80.25 - 77.5	Pole + Reinf.	TP34.034x33.488x0.9625	Reinf. 11 Tension Rupture	66.0%	Pass
77.5 - 77.25	Pole + Reinf.	TP34.083x34.034x0.6875	Reinf. 11 Tension Rupture	92.4%	Pass
77.25 - 73	Pole + Reinf.	TP35.819x34.083x0.6875	Reinf. 11 Tension Rupture	95.5%	Pass
73 - 68	Pole + Reinf.	TP35.233x34.301x0.75	Reinf. 11 Tension Rupture	92.8%	Pass
68 - 64.25	Pole + Reinf.	TP35.932x35.233x0.7375	Reinf. 11 Tension Rupture	95.2%	Pass
64.25 - 64	Pole + Reinf.	TP35.978x35.932x0.875	Reinf. 7 Tension Rupture	83.9%	Pass
64 - 60.5	Pole + Reinf.	TP36.63x35.978x0.8625	Reinf. 7 Tension Rupture	85.8%	Pass
60.5 - 60.25	Pole + Reinf.	TP36.677x36.63x0.925	Reinf. 7 Tension Rupture	81.0%	Pass
60.25 - 60.1	Pole + Reinf.	TP36.705x36.677x0.925	Reinf. 7 Tension Rupture	81.1%	Pass
60.1 - 59.85	Pole + Reinf.	TP36.751x36.705x0.975	Reinf. 7 Tension Rupture	78.4%	Pass
59.85 - 59.1	Pole + Reinf.	TP36.891x36.751x0.975	Reinf. 7 Tension Rupture	78.8%	Pass
59.1 - 58.85	Pole + Reinf.	TP36.938x36.891x1.05	Reinf. 7 Tension Rupture	71.7%	Pass
58.85 - 55.4	Pole + Reinf.	TP37.581x36.938x1.025	Reinf. 7 Tension Rupture	73.3%	Pass
55.4 - 55.15	Pole + Reinf.	TP37.627x37.581x1.025	Reinf. 7 Tension Rupture	73.4%	Pass
55.15 - 54.75	Pole + Reinf.	TP37.702x37.627x1.025	Reinf. 7 Tension Rupture	73.6%	Pass
54.75 - 54.5	Pole + Reinf.	TP37.748x37.702x0.825	Reinf. 10 Tension Rupture	89.4%	Pass
54.5 - 49.5	Pole + Reinf.	TP38.68x37.748x0.8125	Reinf. 10 Tension Rupture	91.8%	Pass
49.5 - 44.5	Pole + Reinf.	TP39.612x38.68x0.8	Reinf. 10 Tension Rupture	94.1%	Pass
44.5 - 41.3	Pole + Reinf.	TP40.208x39.612x0.7875	Reinf. 10 Tension Rupture	95.5%	Pass
41.3 - 41.05	Pole + Reinf.	TP40.254x40.208x0.875	Reinf. 10 Tension Rupture	83.8%	Pass
41.05 - 39	Pole + Reinf.	TP41.568x40.254x0.875	Reinf. 10 Tension Rupture	84.6%	Pass
39 - 33	Pole + Reinf.	TP40.996x39.886x1.175	Reinf. 10 Tension Rupture	65.9%	Pass
33 - 31.5	Pole + Reinf.	TP41.274x40.996x1.175	Reinf. 10 Tension Rupture	66.4%	Pass
31.5 - 31.25	Pole + Reinf.	TP41.32x41.274x1.175	Reinf. 10 Tension Rupture	66.0%	Pass
31.25 - 30.5	Pole + Reinf.	TP41.459x41.32x1.175	Reinf. 10 Tension Rupture	66.3%	Pass
30.5 - 30.25	Pole + Reinf.	TP41.505x41.459x1.125	Reinf. 9 Tension Rupture	69.5%	Pass
30.25 - 25.75	Pole + Reinf.	TP42.337x41.505x1.1	Reinf. 9 Tension Rupture	71.0%	Pass
25.75 - 25.5	Pole + Reinf.	TP42.383x42.337x1.075	Reinf. 9 Tension Rupture	74.9%	Pass
25.5 - 24.7	Pole + Reinf.	TP42.531x42.383x1.075	Reinf. 9 Tension Rupture	75.2%	Pass
24.7 - 24.45	Pole + Reinf.	TP42.578x42.531x0.95	Reinf. 9 Tension Rupture	82.4%	Pass
24.45 - 24	Pole + Reinf.	TP42.661x42.578x0.95	Reinf. 9 Tension Rupture	82.5%	Pass
24 - 23.75	Pole + Reinf.	TP42.707x42.661x1.2	Reinf. 9 Tension Rupture	66.5%	Pass
23.75 - 18.75	Pole + Reinf.	TP43.632x42.707x1.175	Reinf. 9 Tension Rupture	68.1%	Pass
18.75 - 14.1	Pole + Reinf.	TP44.492x43.632x1.15	Reinf. 9 Tension Rupture	69.5%	Pass
14.1 - 13.8	Pole + Reinf.	TP44.547x44.492x1.175	Reinf. 9 Tension Rupture	67.8%	Pass
13.8 - 13.65	Pole + Reinf.	TP44.575x44.547x1.175	Reinf. 9 Tension Rupture	67.8%	Pass
13.65 - 10.5	Pole + Reinf.	TP45.158x44.575x1.175	Reinf. 9 Tension Rupture	68.7%	Pass

10.5 - 10.25	Pole + Reinf.	TP45.204x45.158x1.175	Reinf. 9 Tension Rupture	68.8%	Pass
10.25 - 5.25	Pole + Reinf.	TP46.129x45.204x1.15	Reinf. 9 Tension Rupture	70.2%	Pass
5.25 - 3	Pole + Reinf.	TP46.545x46.129x1.125	Reinf. 9 Tension Rupture	70.8%	Pass
3 - 2.9	Pole + Reinf.	TP46.564x46.545x1.0875	Reinf. 9 Tension Rupture	73.0%	Pass
2.9 - 2.75	Pole + Reinf.	TP46.591x46.564x1.025	Reinf. 9 Tension Rupture	80.6%	Pass
2.75 - 2.65	Pole + Reinf.	TP46.61x46.591x1.025	Reinf. 9 Tension Rupture	80.6%	Pass
2.65 - 2.5	Pole + Reinf.	TP46.638x46.61x1.025	Reinf. 9 Tension Rupture	80.7%	Pass
2.5 - 2.25	Pole + Reinf.	TP46.684x46.638x1	Reinf. 18 Compression	73.5%	Pass
2.25 - 1.9	Pole + Reinf.	TP46.749x46.684x1	Reinf. 18 Compression	73.6%	Pass
1.9 - 1.65	Pole + Reinf.	TP46.795x46.749x0.95	Reinf. 18 Compression	75.2%	Pass
1.65 - 0	Pole + Reinf.	TP47.1x46.795x0.95	Reinf. 18 Compression	75.6%	Pass
				Summary	
			Pole	98.3%	Pass
			Reinforcement	95.5%	Pass
			Overall	98.3%	Pass

Table 6 - Tower Component Stresses vs. Capacity - LC6.7

Notes	Component	Elevation (ft)	% Capacity	Pass / Fail
1	Original Anchor Rods	0	75.1	Pass
1	Additional Anchor Rods	0	71.5	Pass
1	Base Plate	0	67.1	Pass
1	Base Foundation Structure	0	71.0	Pass
1	Base Foundation Soil Interaction	0	86.7	Pass

Structure Rating (max from all components) =	98.3%
---	--------------

Notes:


- 1) See additional documentation in "Appendix C - Additional Calculations" for calculations supporting the % capacity consumed.

4.1) Recommendations

The tower and its foundation have sufficient capacity to carry the proposed load configuration. No modifications are required at this time.

APPENDIX A
TNXTOWER OUTPUT


Section	Length (ft)	Number of Sides	Thickness (in)	Socket Length (ft)	Top Dia (in)	Bot Dia (in)	Grade	Weight (K)
1	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
2	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
3	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
4	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
5	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
6	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
7	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
8	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
9	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
10	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
11	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
12	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
13	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
14	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
15	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
16	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
17	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
18	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
19	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
20	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
21	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
22	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
23	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
24	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
25	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
26	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
27	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
28	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
29	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
30	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
31	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
32	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
33	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
34	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
35	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
36	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
37	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
38	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
39	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
40	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
41	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
42	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
43	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
44	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
45	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
46	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
47	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
48	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
49	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
50	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
51	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
52	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
53	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
54	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
55	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
56	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
57	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
58	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
59	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
60	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
61	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
62	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
63	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
64	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
65	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
66	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
67	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
68	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
69	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80
70	12	12	0.65	3.7500	48.00	47.80	A607-60	47.80

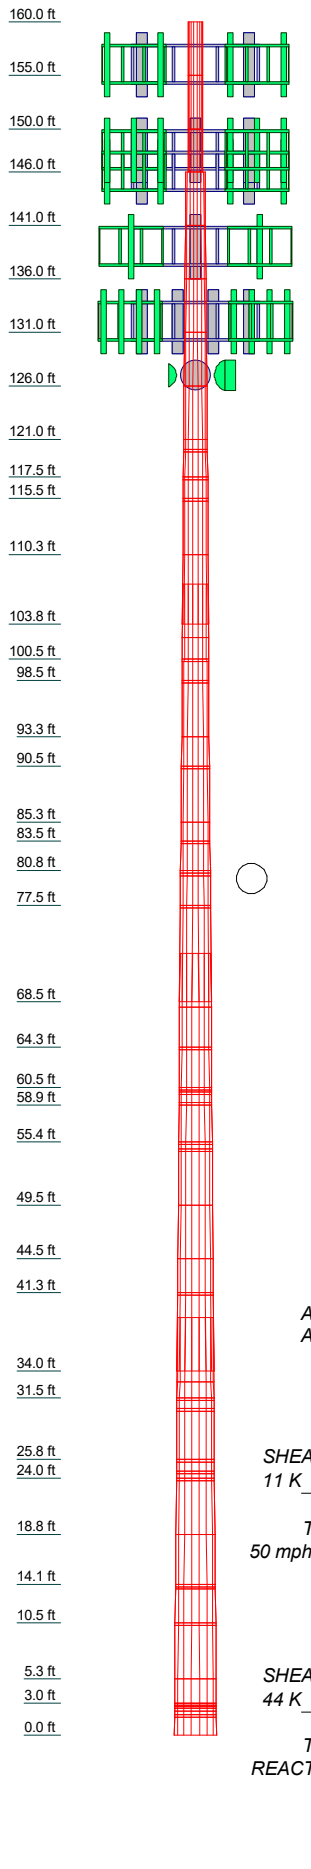

MATERIAL STRENGTH					
GRADE	Fy	Fu	GRADE	Fy	Fu
A53-B-35	35 ksi	60 ksi	A607-65	65 ksi	80 ksi
A607-60	60 ksi	75 ksi			

TOWER DESIGN NOTES

1. Tower is located in Hartford County, Connecticut.
2. Tower designed for Exposure C to the TIA-222-G Standard.
3. Tower designed for a 97 mph basic wind in accordance with the TIA-222-G Standard.
4. Tower is also designed for a 50 mph basic wind with 1.00 in ice. Ice is considered to increase in thickness with height.
5. Deflections are based upon a 60 mph wind.
6. Tower Structure Class II.
7. Topographic Category 1 with Crest Height of 0.0000 ft
8. TOWER RATING: 98.3%

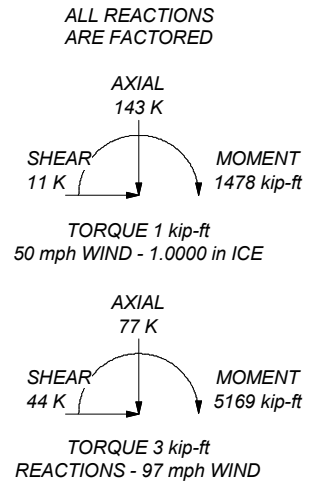

Crown Castle
 2000 Corporate Drive
 Canonsburg, PA 15317
 Phone: (724) 416-2000
 FAX:

Job: BU# 876334		
Project:	Client: Crown Castle	App'd:
Code: TIA-222-G	Drawn by: NCvetic	Scale: NTS
Path:	Date: 02/21/19	Dwg No. E-1

R:\ISA Models - Letters\Work Area\NCvetic\COMPLETE\876334.WO 1681343\test\876334 Reinforced.rvt

Tower Input Data

The tower is a monopole.
 This tower is designed using the TIA-222-G standard.
 The following design criteria apply:

- 1) Tower is located in Hartford County, Connecticut.
- 2) Basic wind speed of 97 mph.
- 3) Structure Class II.
- 4) Exposure Category C.
- 5) Topographic Category 1.
- 6) Crest Height 0.0000 ft.
- 7) Nominal ice thickness of 1.0000 in.
- 8) Ice thickness is considered to increase with height.
- 9) Ice density of 56.0000 pcf.
- 10) A wind speed of 50 mph is used in combination with ice.
- 11) Deflections calculated using a wind speed of 60 mph.
- 12) A non-linear (P-delta) analysis was used.
- 13) Pressures are calculated at each section.
- 14) Stress ratio used in pole design is 1.
- 15) Local bending stresses due to climbing loads, feed line supports, and appurtenance mounts are not considered.

Options

- | | | |
|--|---|---|
| Consider Moments - Legs
Consider Moments - Horizontals
Consider Moments - Diagonals
Use Moment Magnification
✓ Use Code Stress Ratios
✓ Use Code Safety Factors - Guys
Escalate Ice
Always Use Max Kz
Use Special Wind Profile

Include Bolts In Member Capacity

Leg Bolts Are At Top Of Section
Secondary Horizontal Braces Leg
Use Diamond Inner Bracing (4 Sided)
SR Members Have Cut Ends
SR Members Are Concentric | Distribute Leg Loads As Uniform
Assume Legs Pinned
✓ Assume Rigid Index Plate
✓ Use Clear Spans For Wind Area
Use Clear Spans For KL/r
Retension Guys To Initial Tension
✓ Bypass Mast Stability Checks
✓ Use Azimuth Dish Coefficients
✓ Project Wind Area of Appurt.

Autocalc Torque Arm Areas

Add IBC .6D+W Combination
✓ Sort Capacity Reports By Component
Triangulate Diamond Inner Bracing
Treat Feed Line Bundles As Cylinder
Ignore KL/ry For 60 Deg. Angle Legs | Use ASCE 10 X-Brace Ly Rules
Calculate Redundant Bracing Forces
Ignore Redundant Members in FEA
SR Leg Bolts Resist Compression
All Leg Panels Have Same Allowable
Offset Girt At Foundation
✓ Consider Feed Line Torque
Include Angle Block Shear Check
Use TIA-222-G Bracing Resist.
Exemption
Use TIA-222-G Tension Splice
Exemption

<div style="text-align: center; background-color: #e0e0e0; padding: 2px;">Poles</div> ✓ Include Shear-Torsion Interaction
Always Use Sub-Critical Flow
Use Top Mounted Sockets
Pole Without Linear Attachments
Pole With Shroud Or No
Appurtenances
Outside and Inside Corner Radii Are
Known |
|--|---|---|

Tapered Pole Section Geometry

Section	Elevation ft	Section Length ft	Splice Length ft	Number of Sides	Top Diameter in	Bottom Diameter in	Wall Thickness in	Bend Radius in	Pole Grade
L1	160.0000- 155.0000	5.0000	0.0000	Round	16.0000	16.0000	0.3750		A53-B-35 (35 ksi)
L2	155.0000- 150.0000	5.0000	0.0000	Round	16.0000	16.0000	0.3750		A53-B-35 (35 ksi)
L3	150.0000- 146.0000	4.0000	0.0000	Round	16.0000	16.0000	0.3750		A53-B-35 (35 ksi)
L4	146.0000- 141.0000	5.0000	0.0000	12	22.0000	22.9240	0.2500	1.0000	A607-60 (60 ksi)

Section	Elevation ft	Section Length ft	Splice Length ft	Number of Sides	Top Diameter in	Bottom Diameter in	Wall Thickness in	Bend Radius in	Pole Grade
L5	141.0000-136.0000	5.0000	0.0000	12	22.9240	23.8480	0.2500	1.0000	A607-60 (60 ksi)
L6	136.0000-131.0000	5.0000	0.0000	12	23.8480	24.7721	0.2500	1.0000	A607-60 (60 ksi)
L7	131.0000-126.0000	5.0000	0.0000	12	24.7721	25.6961	0.2500	1.0000	A607-60 (60 ksi)
L8	126.0000-121.0000	5.0000	0.0000	12	25.6961	26.6201	0.2500	1.0000	A607-60 (60 ksi)
L9	121.0000-120.1000	0.9000	0.0000	12	26.6201	26.7864	0.2500	1.0000	A607-60 (60 ksi)
L10	120.1000-119.8500	0.2500	0.0000	12	26.7864	26.8326	0.4875	1.9500	A607-60 (60 ksi)
L11	119.8500-117.5000	2.3500	0.0000	12	26.8326	27.2669	0.4875	1.9500	A607-60 (60 ksi)
L12	117.5000-117.2500	0.2500	0.0000	12	27.2669	27.3131	0.5000	2.0000	A607-60 (60 ksi)
L13	117.2500-115.5000	1.7500	0.0000	12	27.3131	27.6365	0.5000	2.0000	A607-60 (60 ksi)
L14	115.5000-115.2500	0.2500	0.0000	12	27.6365	27.6827	0.6625	2.6500	A607-60 (60 ksi)
L15	115.2500-110.2500	5.0000	0.0000	12	27.6827	28.6068	0.6500	2.6000	A607-60 (60 ksi)
L16	110.2500-103.7500	6.5000	3.7500	12	28.6068	29.8080	0.6375	2.5500	A607-60 (60 ksi)
L17	103.7500-102.5000	5.0000	0.0000	12	28.0824	29.0743	0.7125	2.8500	A607-60 (60 ksi)
L18	102.5000-100.5000	2.0000	0.0000	12	29.0743	29.4711	0.7000	2.8000	A607-60 (60 ksi)
L19	100.5000-100.2500	0.2500	0.0000	12	29.4711	29.5206	0.6375	2.5500	A607-60 (60 ksi)
L20	100.2500-98.5000	1.7500	0.0000	12	29.5206	29.8678	0.6375	2.5500	A607-60 (60 ksi)
L21	98.5000-98.2500	0.2500	0.0000	12	29.8678	29.9174	0.6625	2.6500	A607-60 (60 ksi)
L22	98.2500-93.2500	5.0000	0.0000	12	29.9174	30.9093	0.6500	2.6000	A607-60 (60 ksi)
L23	93.2500-90.5000	2.7500	0.0000	12	30.9093	31.4548	0.6500	2.6000	A607-60 (60 ksi)
L24	90.5000-90.2500	0.2500	0.0000	12	31.4548	31.5044	0.6875	2.7500	A607-60 (60 ksi)
L25	90.2500-85.2500	5.0000	0.0000	12	31.5044	32.4962	0.6750	2.7000	A607-60 (60 ksi)
L26	85.2500-83.5000	1.7500	0.0000	12	32.4962	32.8434	0.6625	2.6500	A607-60 (60 ksi)
L27	83.5000-83.2500	0.2500	0.0000	12	32.8434	32.8930	0.9125	3.6500	A607-60 (60 ksi)
L28	83.2500-80.7500	2.5000	0.0000	12	32.8930	33.3889	0.9000	3.6000	A607-60 (60 ksi)
L29	80.7500-80.5000	0.2500	0.0000	12	33.3889	33.4385	1.0625	4.2500	A607-60 (60 ksi)
L30	80.5000-80.2500	0.2500	0.0000	12	33.4385	33.4881	0.9875	3.9500	A607-60 (60 ksi)
L31	80.2500-77.5000	2.7500	0.0000	12	33.4881	34.0336	0.9625	3.8500	A607-60 (60 ksi)
L32	77.5000-77.2500	0.2500	0.0000	12	34.0336	34.0832	0.6875	2.7500	A607-60 (60 ksi)
L33	77.2500-68.5000	8.7500	4.5000	12	34.0832	35.8190	0.6875	2.7500	A607-60 (60 ksi)
L34	68.5000-68.0000	5.0000	0.0000	12	34.3013	35.2329	0.7500	3.0000	A607-60 (60 ksi)
L35	68.0000-64.2500	3.7500	0.0000	12	35.2329	35.9317	0.7375	2.9500	A607-60 (60 ksi)
L36	64.2500-64.0000	0.2500	0.0000	12	35.9317	35.9782	0.8750	3.5000	A607-60 (60 ksi)
L37	64.0000-60.5000	3.5000	0.0000	12	35.9782	36.6304	0.8625	3.4500	A607-60 (60 ksi)
L38	60.5000-60.2500	0.2500	0.0000	12	36.6304	36.6770	0.9250	3.7000	A607-60 (60 ksi)
L39	60.2500-	0.1500	0.0000	12	36.6770	36.7049	0.9250	3.7000	A607-60

Section	Elevation ft	Section Length ft	Splice Length ft	Number of Sides	Top Diameter in	Bottom Diameter in	Wall Thickness in	Bend Radius in	Pole Grade
L40	60.1000 60.1000- 59.8500	0.2500	0.0000	12	36.7049	36.7515	0.9750	3.9000	(60 ksi) A607-60
L41	59.8500- 59.1000	0.7500	0.0000	12	36.7515	36.8912	0.9750	3.9000	(60 ksi) A607-60
L42	59.1000- 58.8500	0.2500	0.0000	12	36.8912	36.9378	1.0500	4.2000	(60 ksi) A607-60
L43	58.8500- 55.4000	3.4500	0.0000	12	36.9378	37.5806	1.0250	4.1000	(60 ksi) A607-60
L44	55.4000- 55.1500	0.2500	0.0000	12	37.5806	37.6272	1.0250	4.1000	(60 ksi) A607-60
L45	55.1500- 54.7500	0.4000	0.0000	12	37.6272	37.7018	1.0250	4.1000	(60 ksi) A607-60
L46	54.7500- 54.5000	0.2500	0.0000	12	37.7018	37.7483	0.8250	3.3000	(60 ksi) A607-60
L47	54.5000- 49.5000	5.0000	0.0000	12	37.7483	38.6800	0.8125	3.2500	(60 ksi) A607-60
L48	49.5000- 44.5000	5.0000	0.0000	12	38.6800	39.6116	0.8000	3.2000	(60 ksi) A607-60
L49	44.5000- 41.3000	3.2000	0.0000	12	39.6116	40.2078	0.7875	3.1500	(60 ksi) A607-60
L50	41.3000- 41.0500	0.2500	0.0000	12	40.2078	40.2544	0.8750	3.5000	(60 ksi) A607-60
L51	41.0500- 34.0000	7.0500	5.0000	12	40.2544	41.5680	0.8750	3.5000	(60 ksi) A607-60
L52	34.0000- 33.0000	6.0000	0.0000	12	39.8864	40.9962	1.1750	4.7000	(65 ksi) A607-65
L53	33.0000- 31.5000	1.5000	0.0000	12	40.9962	41.2736	1.1750	4.7000	(65 ksi) A607-65
L54	31.5000- 31.2500	0.2500	0.0000	12	41.2736	41.3199	1.1750	4.7000	(65 ksi) A607-65
L55	31.2500- 30.5000	0.7500	0.0000	12	41.3199	41.4586	1.1750	4.7000	(65 ksi) A607-65
L56	30.5000- 30.2500	0.2500	0.0000	12	41.4586	41.5048	1.1250	4.5000	(65 ksi) A607-65
L57	30.2500- 25.7500	4.5000	0.0000	12	41.5048	42.3372	1.1000	4.4000	(65 ksi) A607-65
L58	25.7500- 25.5000	0.2500	0.0000	12	42.3372	42.3834	1.0750	4.3000	(65 ksi) A607-65
L59	25.5000- 24.7000	0.8000	0.0000	12	42.3834	42.5314	1.0750	4.3000	(65 ksi) A607-65
L60	24.7000- 24.4500	0.2500	0.0000	12	42.5314	42.5776	0.9500	3.8000	(65 ksi) A607-65
L61	24.4500- 24.0000	0.4500	0.0000	12	42.5776	42.6608	0.9500	3.8000	(65 ksi) A607-65
L62	24.0000- 23.7500	0.2500	0.0000	12	42.6608	42.7071	1.2000	4.8000	(65 ksi) A607-65
L63	23.7500- 18.7500	5.0000	0.0000	12	42.7071	43.6319	1.1750	4.7000	(65 ksi) A607-65
L64	18.7500- 14.1000	4.6500	0.0000	12	43.6319	44.4920	1.1500	4.6000	(65 ksi) A607-65
L65	14.1000- 13.8000	0.3000	0.0000	12	44.4920	44.5475	1.1750	4.7000	(65 ksi) A607-65
L66	13.8000- 13.6500	0.1500	0.0000	12	44.5475	44.5752	1.1750	4.7000	(65 ksi) A607-65
L67	13.6500- 10.5000	3.1500	0.0000	12	44.5752	45.1579	1.1750	4.7000	(65 ksi) A607-65
L68	10.5000- 10.2500	0.2500	0.0000	12	45.1579	45.2041	1.1750	4.7000	(65 ksi) A607-65
L69	10.2500- 5.2500	5.0000	0.0000	12	45.2041	46.1289	1.1500	4.6000	(65 ksi) A607-65
L70	5.2500-3.0000	2.2500	0.0000	12	46.1289	46.5451	1.1250	4.5000	(65 ksi) A607-65
L71	3.0000-2.9000	0.1000	0.0000	12	46.5451	46.5636	1.0875	4.3500	(65 ksi) A607-65
L72	2.9000-2.7500	0.1500	0.0000	12	46.5636	46.5913	1.0250	4.1000	(65 ksi) A607-65
L73	2.7500-2.6500	0.1000	0.0000	12	46.5913	46.6098	1.0250	4.1000	(65 ksi) A607-65

Section	Elevation ft	Section Length ft	Splice Length ft	Number of Sides	Top Diameter in	Bottom Diameter in	Wall Thickness in	Bend Radius in	Pole Grade
L74	2.6500-2.5000	0.1500	0.0000	12	46.6098	46.6376	1.0250	4.1000	A607-65 (65 ksi)
L75	2.5000-2.2500	0.2500	0.0000	12	46.6376	46.6838	1.0000	4.0000	A607-65 (65 ksi)
L76	2.2500-1.9000	0.3500	0.0000	12	46.6838	46.7486	1.0000	4.0000	A607-65 (65 ksi)
L77	1.9000-1.6500	0.2500	0.0000	12	46.7486	46.7948	0.9500	3.8000	A607-65 (65 ksi)
L78	1.6500-0.0000	1.6500		12	46.7948	47.1000	0.9500	3.8000	A607-65 (65 ksi)

Tapered Pole Properties

Section	Tip Dia. in	Area in ²	I in ⁴	r in	C in	I/C in ³	J in ⁴	It/Q in ²	w in	w/t
L1	16.0000	18.4078	562.0841	5.5259	8.0000	70.2605	1124.1682	9.1984	0.0000	0
L2	16.0000	18.4078	562.0841	5.5259	8.0000	70.2605	1124.1682	9.1984	0.0000	0
L3	16.0000	18.4078	562.0841	5.5259	8.0000	70.2605	1124.1682	9.1984	0.0000	0
L4	22.6879	17.5087	1057.2060	7.7865	11.3960	92.7699	2142.1860	8.6173	5.2260	20.904
L5	23.6445	18.2526	1197.7540	8.1173	11.8746	100.8665	2426.9744	8.9834	5.4736	21.895
L6	24.6011	18.9964	1350.2370	8.4481	12.3533	109.3018	2735.9463	9.3495	5.7213	22.885
L7	25.5577	19.7403	1515.1418	8.7789	12.8319	118.0759	3070.0880	9.7156	5.9689	23.876
L8	26.5144	20.4841	1692.9544	9.1097	13.3106	127.1887	3430.3846	10.0817	6.2166	24.866
L9	27.4710	21.2279	1884.1612	9.4405	13.7892	136.6401	3817.8214	10.4477	6.4642	25.857
L10	27.6072	41.2828	3644.4444	9.4150	13.8754	262.6555	7384.6323	20.3181	5.8723	12.046
L11	27.6072	41.3553	3663.6854	9.4316	13.8993	263.5876	7423.6199	20.3538	5.8846	12.071
L12	28.0568	43.0948	3941.0120	9.5826	14.1243	279.0241	7985.5588	21.2099	5.9675	11.935
L13	28.1003	43.1691	3961.4544	9.5991	14.1482	279.9970	8026.9806	21.2465	5.9799	11.96
L14	28.3778	57.5424	5343.9931	9.6567	14.3157	373.2952	10828.378	28.3206	5.6311	8.5
	28.4256	57.6409	5371.5003	9.6732	14.3397	374.5904	10884.115	28.3691	5.6435	8.518
L15	28.4300	56.5795	5277.4687	9.6777	14.3397	368.0330	10693.582	27.8467	5.6770	8.734
	29.3866	58.5135	5837.3551	10.0085	14.8183	393.9286	11828.064	28.7986	5.9246	9.115
L16	29.3910	57.4139	5732.7811	10.0130	14.8183	386.8715	11616.168	28.2574	5.9581	9.346
	30.6346	59.8797	6503.5971	10.4430	15.4405	421.2026	13178.051	29.4710	6.2800	9.851
L17	29.5919	62.7935	6004.1030	9.7984	14.5467	412.7467	12165.940	30.9050	5.6166	7.883
	29.8486	65.0691	6680.7972	10.1535	15.0605	443.5976	13537.106	32.0250	5.8824	8.256
L18	29.8530	63.9557	6572.2725	10.1580	15.0605	436.3917	13317.205	31.4770	5.9159	8.451
	30.2637	64.8500	6851.8380	10.3000	15.2660	448.8298	13883.681	31.9172	6.0222	8.603
L19	30.2858	59.1881	6280.8215	10.3224	15.2660	411.4254	12726.647	29.1306	6.1897	9.709
	30.3371	59.2899	6313.2858	10.3402	15.2917	412.8572	12792.428	29.1807	6.2030	9.73

Section	Tip Dia. in	Area in ²	I in ⁴	r in	C in	I/C in ³	J in ⁴	I/Q in ²	w in	w/t
L20	30.3371	59.2899	6313.2858	10.3402	15.2917	412.8572	12792.428	29.1807	6.2030	9.73
	30.6965	60.0025	6543.6753	10.4644	15.4715	422.9498	13259.260	29.5314	6.2961	9.876
L21	30.6877	62.3022	6782.8565	10.4555	15.4715	438.4092	13743.906	30.6632	6.2291	9.402
	30.7391	62.4080	6817.4695	10.4733	15.4972	439.9160	13814.041	30.7153	6.2424	9.422
L22	30.7435	61.2567	6697.4156	10.4777	15.4972	432.1691	13570.779	30.1487	6.2759	9.655
	31.7703	63.3326	7401.6756	10.8328	16.0110	462.2870	14997.801	31.1704	6.5417	10.064
L23	31.7703	63.3326	7401.6756	10.8328	16.0110	462.2870	14997.801	31.1704	6.5417	10.064
	32.3351	64.4744	7809.2572	11.0281	16.2936	479.2843	15823.672	31.7323	6.6879	10.289
L24	32.3219	68.1111	8229.6629	11.0147	16.2936	505.0863	16675.528	33.5222	6.5874	9.582
	32.3732	68.2209	8269.5235	11.0324	16.3193	506.7337	16756.296	33.5762	6.6007	9.601
L25	32.3776	67.0077	8129.0524	11.0369	16.3193	498.1260	16471.664	32.9791	6.6342	9.828
	33.4045	69.1635	8939.1688	11.3920	16.8331	531.0485	18113.179	34.0402	6.9000	10.222
L26	33.4089	67.9093	8783.9720	11.3965	16.8331	521.8287	17798.708	33.4229	6.9335	10.466
	33.7683	68.6499	9074.4899	11.5208	17.0129	533.3894	18387.376	33.7874	7.0265	10.606
L27	33.6801	93.8210	12209.788	11.4313	17.0129	717.6791	24740.341	46.1758	6.3565	6.966
	33.7314	93.9667	12266.768	11.4490	17.0386	719.9412	24855.798	46.2475	6.3698	6.981
L28	33.7358	92.7157	12112.922	11.4535	17.0386	710.9119	24544.065	45.6318	6.4033	7.115
	34.2493	94.1529	12684.997	11.6310	17.2955	733.4292	25703.244	46.3392	6.5362	7.262
L29	34.1920	110.5968	14751.759	11.5729	17.2955	852.9265	29891.065	54.4324	6.1007	5.742
	34.2433	110.7665	14819.757	11.5906	17.3212	855.5873	30028.846	54.5159	6.1140	5.754
L30	34.2697	103.1861	13869.600	11.6175	17.3212	800.7319	28103.570	50.7851	6.3150	6.395
	34.3211	103.3438	13933.287	11.6352	17.3468	803.2175	28232.617	50.8627	6.3283	6.408
L31	34.3299	100.8050	13611.908	11.6442	17.3468	784.6909	27581.417	49.6132	6.3953	6.644
	34.8947	102.4957	14308.366	11.8395	17.6294	811.6184	28992.629	50.4453	6.5415	6.796
L32	34.9917	73.8200	10477.344	11.9379	17.6294	594.3100	21229.940	36.3320	7.2785	10.587
	35.0430	73.9298	10524.160	11.9557	17.6551	596.0970	21324.802	36.3860	7.2918	10.606
L33	35.0430	73.9298	10524.160	11.9557	17.6551	596.0970	21324.802	36.3860	7.2918	10.606
	36.8400	77.7724	12251.932	12.5771	18.5542	660.3305	24825.737	38.2772	7.7570	11.283
L34	36.1148	81.0264	11642.115	12.0114	17.7681	655.2263	23590.083	39.8787	7.1828	9.577
	36.2113	83.2763	12639.099	12.3449	18.2507	692.5281	25610.242	40.9861	7.4324	9.91
L35	36.2157	81.9181	12441.968	12.3494	18.2507	681.7268	25210.801	40.3176	7.4659	10.123
	36.9390	83.5773	13213.438	12.5995	18.6126	709.9189	26774.008	41.1342	7.6532	10.377
L36	36.8905	98.7722	15493.932	12.5503	18.6126	832.4431	31394.908	48.6126	7.2847	8.325
	36.9388	98.9034	15555.777	12.5670	18.6367	834.6838	31520.221	48.6772	7.2972	8.34
L37	36.9432	97.5252	15349.937	12.5714	18.6367	823.6389	31103.135	47.9989	7.3307	8.499

Section	Tip Dia. in	Area in ²	I in ⁴	r in	C in	I/C in ³	J in ⁴	It/Q in ²	w in	w/t
	37.6183	99.3364	16221.113 8	12.8049	18.9745	854.8884	32868.374 3	48.8903	7.5054	8.702
L38	37.5963	106.3485	17305.521 0	12.7825	18.9745	912.0391	35065.677 3	52.3415	7.3379	7.933
	37.6445	106.4872	17373.339 4	12.7992	18.9987	914.4504	35203.095 8	52.4098	7.3504	7.946
L39	37.6445	106.4872	17373.339 4	12.7992	18.9987	914.4504	35203.095 8	52.4098	7.3504	7.946
	37.6734	106.5705	17414.115 9	12.8092	19.0131	915.8987	35285.720 1	52.4507	7.3579	7.955
L40	37.6558	112.1741	18278.575 6	12.7913	19.0131	961.3652	37037.349 8	55.2087	7.2239	7.409
	37.7040	112.3203	18350.158 1	12.8080	19.0373	963.9068	37182.395 2	55.2806	7.2364	7.422
L41	37.7040	112.3203	18350.158 1	12.8080	19.0373	963.9068	37182.395 2	55.2806	7.2364	7.422
	37.8487	112.7590	18566.027 8	12.8580	19.1097	971.5519	37619.805 8	55.4966	7.2739	7.46
L42	37.8222	121.1792	19869.190 1	12.8312	19.1097	1039.7458	40260.365 9	59.6407	7.0729	6.736
	37.8704	121.3367	19946.759 7	12.8478	19.1338	1042.4886	40417.542 9	59.7182	7.0853	6.748
L43	37.8793	118.5303	19512.558 3	12.8568	19.1338	1019.7957	39537.733 2	58.3370	7.1523	6.978
	38.5448	120.6519	20579.221 1	13.0869	19.4668	1057.1460	41699.081 3	59.3812	7.3246	7.146
L44	38.5448	120.6519	20579.221 1	13.0869	19.4668	1057.1460	41699.081 3	59.3812	7.3246	7.146
	38.5930	120.8056	20657.990 6	13.1036	19.4909	1059.8787	41858.689 6	59.4569	7.3371	7.158
L45	38.5930	120.8056	20657.990 6	13.1036	19.4909	1059.8787	41858.689 6	59.4569	7.3371	7.158
	38.6701	121.0516	20784.440 1	13.1303	19.5295	1064.2582	42114.910 5	59.5779	7.3571	7.178
L46	38.7407	97.9631	17004.105 6	13.2019	19.5295	870.6879	34454.928 0	48.2145	7.8931	9.567
	38.7889	98.0868	17068.624 8	13.2186	19.5536	872.9130	34585.661 4	48.2754	7.9056	9.582
L47	38.7933	96.6334	16827.087 6	13.2230	19.5536	860.5605	34096.241 6	47.5600	7.9391	9.771
	39.7578	99.0707	18132.751 8	13.5566	20.0362	904.9987	36741.871 2	48.7596	8.1887	10.078
L48	39.7622	97.5788	17871.472 8	13.5610	20.0362	891.9583	36212.449 1	48.0253	8.2222	10.278
	40.7267	99.9786	19222.770 4	13.8945	20.5188	936.8369	38950.544 4	49.2064	8.4719	10.59
L49	40.7311	98.4482	18940.703 5	13.8990	20.5188	923.0901	38379.000 3	48.4532	8.5054	10.801
	41.3484	99.9601	19826.819 5	14.1125	20.8277	951.9468	40174.511 5	49.1973	8.6652	11.003
L50	41.3175	110.8202	21883.428 3	14.0812	20.8277	1050.6910	44341.758 7	54.5424	8.4307	9.635
	41.3658	110.9515	21961.268 6	14.0978	20.8518	1053.2082	44499.484 2	54.6069	8.4432	9.649
L51	41.3658	110.9515	21961.268 6	14.0978	20.8518	1053.2082	44499.484 2	54.6069	8.4432	9.649
	42.7257	114.6525	24233.101 4	14.5681	21.5322	1125.4342	49102.833 4	56.4285	8.7952	10.052
L52	41.8364	146.4645	28015.310 9	13.8587	20.6611	1355.9421	56766.615 3	72.0854	7.5405	6.417
	42.0279	150.6634	30494.499 3	14.2560	21.2360	1435.9805	61790.123 1	74.1519	7.8380	6.671
L53	42.0279	150.6634	30494.499 3	14.2560	21.2360	1435.9805	61790.123 1	74.1519	7.8380	6.671
	42.3151	151.7131	31136.345 9	14.3553	21.3797	1456.3489	63090.678 3	74.6686	7.9123	6.734
L54	42.3151	151.7131	31136.345 9	14.3553	21.3797	1456.3489	63090.678 3	74.6686	7.9123	6.734
	42.3630	151.8880	31244.187 8	14.3719	21.4037	1459.7576	63309.195 2	74.7547	7.9247	6.744

Section	Tip Dia. in	Area in ²	I in ⁴	r in	C in	I/C in ³	J in ⁴	I/Q in ²	w in	w/t
L55	42.3630	151.8880	31244.1878	14.3719	21.4037	1459.7576	63309.1952	74.7547	7.9247	6.744
	42.5066	152.4129	31569.2093	14.4215	21.4755	1470.0076	63967.7769	75.0130	7.9619	6.776
L56	42.5242	146.1084	30338.5275	14.4394	21.4755	1412.7014	61474.0818	71.9101	8.0959	7.196
	42.5721	146.2759	30442.9932	14.4560	21.4995	1415.9865	61685.7578	71.9925	8.1083	7.207
L57	42.5809	143.1139	29821.8037	14.4649	21.4995	1387.0932	60427.0594	70.4363	8.1753	7.432
	43.4426	146.0620	31703.0215	14.7629	21.9306	1445.6035	64238.9167	71.8873	8.3984	7.635
L58	43.4514	142.8290	31038.8818	14.7719	21.9306	1415.3199	62893.1897	70.2961	8.4654	7.875
	43.4993	142.9890	31143.3535	14.7884	21.9546	1418.5343	63104.8776	70.3748	8.4778	7.886
L59	43.4993	142.9890	31143.3535	14.7884	21.9546	1418.5343	63104.8776	70.3748	8.4778	7.886
	43.6525	143.5012	31479.2300	14.8414	22.0312	1428.8445	63785.4545	70.6269	8.5174	7.923
L60	43.6966	127.1974	28071.2537	14.8861	22.0312	1274.1562	56879.9705	62.6027	8.8524	9.318
	43.7445	127.3389	28165.0107	14.9027	22.0552	1277.0234	57069.9477	62.6723	8.8648	9.331
L61	43.7445	127.3389	28165.0107	14.9027	22.0552	1277.0234	57069.9477	62.6723	8.8648	9.331
	43.8306	127.5935	28334.2957	14.9325	22.0983	1282.1924	57412.9650	62.7976	8.8871	9.355
L62	43.7424	160.2047	35150.9888	14.8430	22.0983	1590.6635	71225.4333	78.8479	8.2171	6.848
	43.7903	160.3834	35268.7310	14.8595	22.1223	1594.2636	71464.0109	78.9358	8.2295	6.858
L63	43.7991	157.1367	34596.4035	14.8685	22.1223	1563.8721	70101.6931	77.3379	8.2965	7.061
	44.7566	160.6357	36959.3963	15.1996	22.6013	1635.2753	74889.7571	79.0600	8.5444	7.272
L64	44.7654	157.3105	36236.9633	15.2085	22.6013	1603.3111	73425.9120	77.4235	8.6114	7.488
	45.6558	160.4954	38482.7780	15.5164	23.0469	1669.7627	77976.5414	78.9910	8.8419	7.689
L65	45.6470	163.8899	39251.3602	15.5075	23.0469	1703.1114	79533.8974	80.6616	8.7749	7.468
	45.7045	164.0998	39402.3963	15.5273	23.0756	1707.5352	79839.9375	80.7649	8.7897	7.481
L66	45.7045	164.0998	39402.3963	15.5273	23.0756	1707.5352	79839.9375	80.7649	8.7897	7.481
	45.7332	164.2048	39478.0608	15.5373	23.0900	1709.7494	79993.2542	80.8166	8.7972	7.487
L67	45.7332	164.2048	39478.0608	15.5373	23.0900	1709.7494	79993.2542	80.8166	8.7972	7.487
	46.3364	166.4092	41089.4552	15.7459	23.3918	1756.5769	83258.3761	81.9015	8.9533	7.62
L68	46.3364	166.4092	41089.4552	15.7459	23.3918	1756.5769	83258.3761	81.9015	8.9533	7.62
	46.3842	166.5841	41219.1886	15.7624	23.4157	1760.3205	83521.2512	81.9876	8.9657	7.63
L69	46.3931	163.1324	40410.9432	15.7714	23.4157	1725.8033	81883.5269	80.2888	9.0327	7.855
	47.3505	166.5570	43009.7746	16.1025	23.8948	1799.9647	87149.4639	81.9743	9.2806	8.07
L70	47.3593	163.0268	42144.9760	16.1114	23.8948	1763.7727	85397.1474	80.2368	9.3476	8.309
	47.7902	164.5343	43325.0203	16.2604	24.1104	1796.9459	87788.2371	80.9788	9.4591	8.408
L71	47.8034	159.1812	41984.6723	16.2738	24.1104	1741.3537	85072.3287	78.3441	9.5596	8.79
	47.8226	159.2459	42035.9419	16.2804	24.1199	1742.7876	85176.2148	78.3760	9.5645	8.795
L72	47.8446	150.3002	39783.6632	16.3028	24.1199	1649.4093	80612.4875	73.9732	9.7320	9.495

Section	Tip Dia. in	Area in ²	I in ⁴	r in	C in	I/C in ³	J in ⁴	I/Q in ²	w in	w/t
	47.8733	150.3917	39856.423 7	16.3128	24.1343	1651.4419	80759.919 9	74.0182	9.7395	9.502
L73	47.8733	150.3917	39856.423 7	16.3128	24.1343	1651.4419	80759.919 9	74.0182	9.7395	9.502
	47.8925	150.4528	39904.978 2	16.3194	24.1439	1652.7976	80858.304 5	74.0483	9.7444	9.507
L74	47.8925	150.4528	39904.978 2	16.3194	24.1439	1652.7976	80858.304 5	74.0483	9.7444	9.507
	47.9212	150.5443	39977.886 4	16.3293	24.1583	1654.8323	81006.036 5	74.0933	9.7519	9.514
L75	47.9300	146.9530	39066.982 9	16.3383	24.1583	1617.1266	79160.298 9	72.3258	9.8189	9.819
	47.9779	147.1019	39185.853 8	16.3548	24.1822	1620.4405	79401.163 6	72.3991	9.8313	9.831
L76	47.9779	147.1019	39185.853 8	16.3548	24.1822	1620.4405	79401.163 6	72.3991	9.8313	9.831
	48.0449	147.3104	39352.679 4	16.3780	24.2158	1625.0856	79739.197 4	72.5017	9.8486	9.849
L77	48.0626	140.0978	37507.757 2	16.3959	24.2158	1548.8988	76000.884 9	68.9519	9.9826	10.508
	48.1104	140.2393	37621.482 2	16.4124	24.2397	1552.0599	76231.322 6	69.0215	9.9950	10.521
L78	48.1104	140.2393	37621.482 2	16.4124	24.2397	1552.0599	76231.322 6	69.0215	9.9950	10.521
	48.4264	141.1729	38377.841 4	16.5217	24.3978	1573.0042	77763.911 3	69.4810	10.0768	10.607

Tower Elevation	Gusset Area (per face)	Gusset Thickness	Gusset Grade	Adjust. Factor A _r	Adjust. Factor A _r	Weight Mult.	Double Angle Stitch Bolt Spacing Diagonals	Double Angle Stitch Bolt Spacing Horizontals	Double Angle Stitch Bolt Spacing Redundants
ft	ft ²	in					in	in	in
L1 160.0000- 155.0000				1	1	1			
L2 155.0000- 150.0000				1	1	1			
L3 150.0000- 146.0000				1	1	1			
L4 146.0000- 141.0000				1	1	1			
L5 141.0000- 136.0000				1	1	1			
L6 136.0000- 131.0000				1	1	1			
L7 131.0000- 126.0000				1	1	1			
L8 126.0000- 121.0000				1	1	1			
L9 121.0000- 120.1000				1	1	1			
L10 120.1000- 119.8500				1	1	0.95332			
L11 119.8500- 117.5000				1	1	0.946176			
L12 117.5000- 117.2500				1	1	1.02662			
L13 117.2500- 115.5000				1	1	1.02034			
L14 115.5000- 115.2500				1	1	0.930389			
L15 115.2500- 110.2500				1	1	0.929227			
L16				1	1	0.937122			

Tower Elevation	Gusset Area (per face)	Gusset Thickness	Gusset Grade	Adjust. Factor A_r	Adjust. Factor A_r	Weight Mult.	Double Angle Stitch Bolt Spacing Diagonals in	Double Angle Stitch Bolt Spacing Horizontals in	Double Angle Stitch Bolt Spacing Redundants in
ft	ft ²	in							
110.2500-103.7500									
L17				1	1	0.929577			
103.7500-102.5000									
L18				1	1	0.938874			
102.5000-100.5000									
L19				1	1	0.987647			
100.5000-100.2500									
L20				1	1	0.981739			
100.2500-98.5000									
L21				1	1	0.992837			
98.5000-98.2500									
L22				1	1	0.994101			
98.2500-93.2500									
L23				1	1	0.985011			
93.2500-90.5000									
L24				1	1	1.06743			
90.5000-90.2500									
L25				1	1	1.06732			
90.2500-85.2500									
L26				1	1	1.08039			
85.2500-83.5000									
L27				1	1	0.98167			
83.5000-83.2500									
L28				1	1	0.985028			
83.2500-80.7500									
L29				1	1	0.933797			
80.7500-80.5000									
L30				1	1	0.980758			
80.5000-80.2500									
L31				1	1	0.994229			
80.2500-77.5000									
L32				1	1	1.13524			
77.5000-77.2500									
L33				1	1	1.11848			
77.2500-68.5000									
L34				1	1	1.10521			
68.5000-68.0000									
L35				1	1	1.11132			
68.0000-64.2500									
L36				1	1	1.01435			
64.2500-64.0000									
L37				1	1	1.01786			
64.0000-60.5000									
L38				1	1	1.00999			
60.5000-60.2500									
L39				1	1	1.00952			
60.2500-60.1000									
L40				1	1	0.995161			
60.1000-59.8500									
L41				1	1	0.992785			
59.8500-59.1000									
L42				1	1	0.991238			
59.1000-58.8500									
L43				1	1	1.0033			
58.8500-55.4000									
L44				1	1	1.00249			
55.4000-55.1500									
L45				1	1	1.00119			
55.1500-54.7500									
L46				1	1	1.0524			
54.7500-54.5000									
L47				1	1	1.0533			

Tower Elevation	Gusset Area (per face)	Gusset Thickness	Gusset Grade	Adjust. Factor A_r	Adjust. Factor A_r	Weight Mult.	Double Angle Stitch Bolt Spacing Diagonals in	Double Angle Stitch Bolt Spacing Horizontals in	Double Angle Stitch Bolt Spacing Redundants in
ft	ft ²	in							
49.5000									
L48 49.5000-44.5000				1	1	1.05499			
L49 44.5000-41.3000				1	1	1.06239			
L50 41.3000-41.0500				1	1	1.05355			
L51 41.0500-34.0000				1	1	1.04754			
L52 34.0000-33.0000				1	1	0.943815			
L53 33.0000-31.5000				1	1	0.939493			
L54 31.5000-31.2500				1	1	0.9488			
L55 31.2500-30.5000				1	1	0.946632			
L56 30.5000-30.2500				1	1	0.963898			
L57 30.2500-25.7500				1	1	0.97219			
L58 25.7500-25.5000				1	1	0.977059			
L59 25.5000-24.7000				1	1	0.974817			
L60 24.7000-24.4500				1	1	0.931867			
L61 24.4500-24.0000				1	1	0.930795			
L62 24.0000-23.7500				1	1	0.878408			
L63 23.7500-18.7500				1	1	0.88398			
L64 18.7500-14.1000				1	1	0.891223			
L65 14.1000-13.8000				1	1	0.887984			
L66 13.8000-13.6500				1	1	0.887621			
L67 13.6500-10.5000				1	1	0.88009			
L68 10.5000-10.2500				1	1	0.851697			
L69 10.2500-5.2500				1	1	0.858541			
L70 5.2500-3.0000				1	1	0.872149			
L71 3.0000-2.9000				1	1	0.863521			
L72 2.9000-2.7500				1	1	0.839338			
L73 2.7500-2.6500				1	1	0.839146			
L74 2.6500-2.5000				1	1	0.838858			
L75 2.5000-2.2500				1	1	0.872484			
L76 2.2500-1.9000				1	1	0.87178			
L77 1.9000-1.6500				1	1	0.857151			
L78 1.6500-0.0000				1	1	0.854093			

Feed Line/Linear Appurtenances - Entered As Round Or Flat

Description	Sector	Exclude From Torque Calculation	Component Type	Placement ft	Total Number	Number Per Row	Start/End Position	Width or Diameter in	Perimeter in	Weight plf
LDF7-50A(1-5/8")	B	No	Surface Ar (CaAa)	156.0000 - 0.0000	8	8	-0.400 -0.200	0.0000		0.8200
2" Rigid Conduit	B	No	Surface Ar (CaAa)	156.0000 - 0.0000	3	3	-0.200 -0.100	0.0000		2.8000
**										
HB114-1-08U4-M5J(1-1/4")	B	No	Surface Ar (CaAa)	146.0000 - 0.0000	4	4	-0.100 0.100	0.0000		1.0800
**										
561(1-5/8")	A	No	Surface Ar (CaAa)	132.0000 - 0.0000	4	4	-0.150 0.000	0.0000		1.3500
**										
LDF4P-50A(1/2")	A	No	Surface Ar (CaAa)	129.0000 - 0.0000	3	3	-0.300 -0.150	0.0000		0.1500
**										
**										
**										
Aero MP305	A	No	Surface Af (CaAa)	31.5000 - 11.5000	1	1	0.500 0.500	5.3300	14.8400	0.0000
Aero MP305	B	No	Surface Af (CaAa)	30.5000 - 0.0000	1	1	0.500 0.500	5.3300	14.8400	0.0000
Aero MP305	C	No	Surface Af (CaAa)	30.5000 - 0.0000	1	1	0.500 0.500	5.3300	14.8400	0.0000
Aero MP304	A	No	Surface Af (CaAa)	15.5000 - 0.0000	1	1	-0.250 -0.250	4.7800	12.7800	0.0000
Aero MP304	B	No	Surface Af (CaAa)	15.5000 - 0.0000	1	1	0.250 0.250	4.7800	12.7800	0.0000
Aero MP304	B	No	Surface Af (CaAa)	60.5000 - 30.5000	1	1	0.500 0.500	4.7800	12.7800	0.0000
Aero MP304	C	No	Surface Af (CaAa)	60.5000 - 30.5000	1	1	0.500 0.500	4.7800	12.7800	0.0000
Aero MP304	A	No	Surface Af (CaAa)	61.5000 - 31.0000	1	1	0.500 0.500	4.7800	12.7800	0.0000
**										
6" x 1" Flat Plate (G)	C	No	Surface Af (CaAa)	30.5000 - 0.5000	1	1	-0.250 -0.250	6.0000	14.0000	0.0000
6" x 1" Flat Plate (G)	B	No	Surface Af (CaAa)	30.5000 - 0.5000	1	1	0.000 0.000	6.0000	14.0000	0.0000
6" x 1" Flat Plate (G)	A	No	Surface Af (CaAa)	30.5000 - 0.5000	1	1	0.000 0.000	6.0000	14.0000	0.0000
6.5" x 1.25" Flat Plate (G)	C	No	Surface Af (CaAa)	60.5000 - 30.5000	1	1	-0.250 -0.250	6.5000	15.5000	0.0000
6.5" x 1.25" Flat Plate (G)	B	No	Surface Af (CaAa)	60.5000 - 30.5000	1	1	0.000 0.000	6.5000	15.5000	0.0000
6.5" x 1.25" Flat Plate (G)	A	No	Surface Af (CaAa)	60.5000 - 30.5000	1	1	0.000 0.000	6.5000	15.5000	0.0000
6" x 1" Flat Plate (G)	C	No	Surface Af (CaAa)	100.5000 - 60.5000	1	1	-0.250 -0.250	6.0000	14.0000	0.0000
6" x 1" Flat Plate (G)	B	No	Surface Af (CaAa)	100.5000 - 60.5000	1	1	0.000 0.000	6.0000	14.0000	0.0000
6" x 1" Flat Plate (G)	A	No	Surface Af (CaAa)	100.5000 - 60.5000	1	1	0.000 0.000	6.0000	14.0000	0.0000
**										
6.5" x 1.25" Flat Plate (G)	C	No	Surface Af (CaAa)	38.0000 - 23.0000	1	1	0.000 0.000	6.5000	15.5000	0.0000
6.5" x 1.25" Flat Plate (G)	B	No	Surface Af (CaAa)	38.0000 - 23.0000	1	1	0.250 0.250	6.5000	15.5000	0.0000
6.5" x 1.25" Flat Plate (G)	A	No	Surface Af (CaAa)	38.0000 - 23.0000	1	1	0.250 0.250	6.5000	15.5000	0.0000
6.5" x 1.25" Flat Plate (G)	C	No	Surface Af (CaAa)	67.0000 - 52.0000	1	1	0.000 0.000	6.5000	15.5000	0.0000
6.5" x 1.25" Flat Plate (G)	B	No	Surface Af (CaAa)	67.0000 - 52.0000	1	1	0.250 0.250	6.5000	15.5000	0.0000
6.5" x 1.25" Flat Plate (G)	A	No	Surface Af (CaAa)	67.0000 - 52.0000	1	1	0.250 0.250	6.5000	15.5000	0.0000
6.5" x 1.25" Flat Plate (G)	C	No	Surface Af	85.5000 -	1	1	0.000	6.5000	15.5000	0.0000

Description	Sector	Exclude From Torque Calculation	Component Type	Placement ft	Total Number	Number Per Row	Start/End Position	Width or Diameter in	Perimeter in	Weight plf
(G) 6.5" x 1.25" Flat Plate	B	No	(CaAa) Surface Af	72.5000 85.5000 -	1	1	0.000 0.250	6.5000	15.5000	0.0000
(G) 6.5" x 1.25" Flat Plate	A	No	(CaAa) Surface Af	72.5000 85.5000 -	1	1	0.250	6.5000	15.5000	0.0000
(G) **										
6" x 1" Flat Plate (G)	C	No	Surface Af (CaAa)	10.5000 - 0.5000	1	1	0.250 0.250	6.0000	14.0000	0.0000
8.5" x 1.25" Flat Plate (G)	C	No	Surface Af (CaAa)	45.5000 - 10.5000	1	1	0.250	8.5000	19.5000	0.0000
8.5" x 1.25" Flat Plate (G)	C	No	Surface Af (CaAa)	85.0000 - 60.0000	1	1	0.250	8.5000	19.5000	0.0000
4.5" x 1" Flat Plate (G)	C	No	Surface Af (CaAa)	117.0000 - 97.0000	1	1	0.250	4.5000	11.0000	0.0000
4.5" x 1" Flat Plate (G)	A	No	Surface Af (CaAa)	117.0000 - 97.0000	1	1	0.250	4.5000	11.0000	0.0000
4.5" x 1" Flat Plate (G)	B	No	Surface Af (CaAa)	119.0000 - 99.0000	1	1	0.250	4.5000	11.0000	0.0000
**										
8.5" x 1.25" Flat Plate (G)	A	No	Surface Af (CaAa)	55.4000 - 20.4000	1	1	-0.250 -0.250	8.5000	19.5000	0.0000
8.5" x 1.25" Flat Plate (G)	B	No	Surface Af (CaAa)	55.4000 - 20.4000	1	1	-0.250	8.5000	19.5000	0.0000
8.5" x 1.25" Flat Plate (G)	A	No	Surface Af (CaAa)	90.5000 - 55.5000	1	1	-0.250 -0.250	8.5000	19.5000	0.0000
8.5" x 1.25" Flat Plate (G)	B	No	Surface Af (CaAa)	90.5000 - 55.5000	1	1	-0.250	8.5000	19.5000	0.0000
6" x 1" Flat Plate (G)	A	No	Surface Af (CaAa)	122.6000 - 90.6000	1	1	-0.250 -0.250	6.0000	14.0000	0.0000
6" x 1" Flat Plate (G)	B	No	Surface Af (CaAa)	122.6000 - 90.6000	1	1	-0.250	6.0000	14.0000	0.0000
6" x 1" Flat Plate (G)	C	No	Surface Af (CaAa)	122.6000 - 100.6000	1	1	-0.250 -0.250	6.0000	14.0000	0.0000
**										

Feed Line/Linear Appurtenances - Entered As Area

Description	Face or Leg	Allow Shield	Exclude From Torque Calculation	Component Type	Placement ft	Total Number	CAAA	Weight
							ft ² /ft	plf
FB-L98B-002-75000(3/8")	B	No	No	Inside Pole	156.0000 - 0.0000	2	No Ice 1/2" Ice 1" Ice	0.0586 0.0586 0.0586
WR-VG86ST-BRD(3/4")	B	No	No	Inside Pole	156.0000 - 0.0000	6	No Ice 1/2" Ice 1" Ice	0.5840 0.5840 0.5840
AVA7-50(1-5/8")	B	No	No	Inside Pole	139.0000 - 0.0000	6	No Ice 1/2" Ice 1" Ice	0.7000 0.7000 0.7000
LDF4-50A(1/2")	B	No	No	Inside Pole	101.0000 - 0.0000	1	No Ice 1/2" Ice 1" Ice	0.1500 0.1500 0.1500
561(1-5/8")	A	No	No	Inside Pole	132.0000 - 0.0000	3	No Ice 1/2" Ice 1" Ice	1.3500 1.3500 1.3500
HB114-U6S12-xxx-LI(1-1/4")	A	No	No	Inside Pole	132.0000 - 0.0000	1	No Ice 1/2" Ice 1" Ice	1.7000 1.7000 1.7000
**								
**								
**								

Feed Line/Linear Appurtenances Section Areas

Tower Sectio n	Tower Elevation ft	Face	A_R ft ²	A_F ft ²	C_{AA} In Face ft ²	C_{AA} Out Face ft ²	Weight K
L1	160.0000- 155.0000	A	0.000	0.000	0.000	0.000	0.0000
		B	0.000	0.000	0.000	0.000	0.0186
		C	0.000	0.000	0.000	0.000	0.0000
L2	155.0000- 150.0000	A	0.000	0.000	0.000	0.000	0.0000
		B	0.000	0.000	0.000	0.000	0.0929
		C	0.000	0.000	0.000	0.000	0.0000
L3	150.0000- 146.0000	A	0.000	0.000	0.000	0.000	0.0000
		B	0.000	0.000	0.000	0.000	0.0743
		C	0.000	0.000	0.000	0.000	0.0000
L4	146.0000- 141.0000	A	0.000	0.000	0.000	0.000	0.0000
		B	0.000	0.000	0.000	0.000	0.1145
		C	0.000	0.000	0.000	0.000	0.0000
L5	141.0000- 136.0000	A	0.000	0.000	0.000	0.000	0.0000
		B	0.000	0.000	0.000	0.000	0.1271
		C	0.000	0.000	0.000	0.000	0.0000
L6	136.0000- 131.0000	A	0.000	0.000	0.000	0.000	0.0112
		B	0.000	0.000	0.000	0.000	0.1355
		C	0.000	0.000	0.000	0.000	0.0000
L7	131.0000- 126.0000	A	0.000	0.000	0.000	0.000	0.0571
		B	0.000	0.000	0.000	0.000	0.1355
		C	0.000	0.000	0.000	0.000	0.0000
L8	126.0000- 121.0000	A	0.000	0.000	1.600	0.000	0.0580
		B	0.000	0.000	1.600	0.000	0.1355
		C	0.000	0.000	1.600	0.000	0.0000
L9	121.0000- 120.1000	A	0.000	0.000	0.900	0.000	0.0104
		B	0.000	0.000	0.900	0.000	0.0244
		C	0.000	0.000	0.900	0.000	0.0000
L10	120.1000- 119.8500	A	0.000	0.000	0.250	0.000	0.0029
		B	0.000	0.000	0.250	0.000	0.0068
		C	0.000	0.000	0.250	0.000	0.0000
L11	119.8500- 117.5000	A	0.000	0.000	2.350	0.000	0.0273
		B	0.000	0.000	3.475	0.000	0.0637
		C	0.000	0.000	2.350	0.000	0.0000
L12	117.5000- 117.2500	A	0.000	0.000	0.250	0.000	0.0029
		B	0.000	0.000	0.438	0.000	0.0068
		C	0.000	0.000	0.250	0.000	0.0000
L13	117.2500- 115.5000	A	0.000	0.000	2.875	0.000	0.0203
		B	0.000	0.000	3.063	0.000	0.0474
		C	0.000	0.000	2.875	0.000	0.0000
L14	115.5000- 115.2500	A	0.000	0.000	0.438	0.000	0.0029
		B	0.000	0.000	0.438	0.000	0.0068
		C	0.000	0.000	0.438	0.000	0.0000
L15	115.2500- 110.2500	A	0.000	0.000	8.750	0.000	0.0580
		B	0.000	0.000	8.750	0.000	0.1355
		C	0.000	0.000	8.750	0.000	0.0000
L16	110.2500- 103.7500	A	0.000	0.000	11.375	0.000	0.0754
		B	0.000	0.000	11.375	0.000	0.1762
		C	0.000	0.000	11.375	0.000	0.0000
L17	103.7500- 102.5000	A	0.000	0.000	2.188	0.000	0.0145
		B	0.000	0.000	2.188	0.000	0.0339
		C	0.000	0.000	2.188	0.000	0.0000
L18	102.5000- 100.5000	A	0.000	0.000	3.500	0.000	0.0232
		B	0.000	0.000	3.500	0.000	0.0543
		C	0.000	0.000	3.400	0.000	0.0000
L19	100.5000- 100.2500	A	0.000	0.000	0.688	0.000	0.0029
		B	0.000	0.000	0.688	0.000	0.0068
		C	0.000	0.000	0.438	0.000	0.0000
L20	100.2500- 98.5000	A	0.000	0.000	4.813	0.000	0.0203
		B	0.000	0.000	4.438	0.000	0.0477
		C	0.000	0.000	3.063	0.000	0.0000
L21	98.5000-98.2500	A	0.000	0.000	0.688	0.000	0.0029
		B	0.000	0.000	0.500	0.000	0.0068
		C	0.000	0.000	0.438	0.000	0.0000

Tower Sectio n	Tower Elevation ft	Face	A _R ft ²	A _F ft ²	C _A A _A In Face ft ²	C _A A _A Out Face ft ²	Weight K
L22	98.2500-93.2500	A	0.000	0.000	10.938	0.000	0.0580
		B	0.000	0.000	10.000	0.000	0.1363
		C	0.000	0.000	5.938	0.000	0.0000
L23	93.2500-90.5000	A	0.000	0.000	5.400	0.000	0.0319
		B	0.000	0.000	5.400	0.000	0.0749
		C	0.000	0.000	2.750	0.000	0.0000
L24	90.5000-90.2500	A	0.000	0.000	0.604	0.000	0.0029
		B	0.000	0.000	0.604	0.000	0.0068
		C	0.000	0.000	0.250	0.000	0.0000
L25	90.2500-85.2500	A	0.000	0.000	12.348	0.000	0.0580
		B	0.000	0.000	12.348	0.000	0.1363
		C	0.000	0.000	5.264	0.000	0.0000
L26	85.2500-83.5000	A	0.000	0.000	6.080	0.000	0.0203
		B	0.000	0.000	6.080	0.000	0.0477
		C	0.000	0.000	5.726	0.000	0.0000
L27	83.5000-83.2500	A	0.000	0.000	0.869	0.000	0.0029
		B	0.000	0.000	0.869	0.000	0.0068
		C	0.000	0.000	0.869	0.000	0.0000
L28	83.2500-80.7500	A	0.000	0.000	8.685	0.000	0.0290
		B	0.000	0.000	8.685	0.000	0.0681
		C	0.000	0.000	8.685	0.000	0.0000
L29	80.7500-80.5000	A	0.000	0.000	0.869	0.000	0.0029
		B	0.000	0.000	0.869	0.000	0.0068
		C	0.000	0.000	0.869	0.000	0.0000
L30	80.5000-80.2500	A	0.000	0.000	0.869	0.000	0.0029
		B	0.000	0.000	0.869	0.000	0.0068
		C	0.000	0.000	0.869	0.000	0.0000
L31	80.2500-77.5000	A	0.000	0.000	9.554	0.000	0.0319
		B	0.000	0.000	9.554	0.000	0.0749
		C	0.000	0.000	9.554	0.000	0.0000
L32	77.5000-77.2500	A	0.000	0.000	0.869	0.000	0.0029
		B	0.000	0.000	0.869	0.000	0.0068
		C	0.000	0.000	0.869	0.000	0.0000
L33	77.2500-68.5000	A	0.000	0.000	26.169	0.000	0.1015
		B	0.000	0.000	26.169	0.000	0.2384
		C	0.000	0.000	26.169	0.000	0.0000
L34	68.5000-68.0000	A	0.000	0.000	1.208	0.000	0.0058
		B	0.000	0.000	1.208	0.000	0.0136
		C	0.000	0.000	1.208	0.000	0.0000
L35	68.0000-64.2500	A	0.000	0.000	12.042	0.000	0.0435
		B	0.000	0.000	12.042	0.000	0.1022
		C	0.000	0.000	12.042	0.000	0.0000
L36	64.2500-64.0000	A	0.000	0.000	0.875	0.000	0.0029
		B	0.000	0.000	0.875	0.000	0.0068
		C	0.000	0.000	0.875	0.000	0.0000
L37	64.0000-60.5000	A	0.000	0.000	13.047	0.000	0.0406
		B	0.000	0.000	12.250	0.000	0.0954
		C	0.000	0.000	12.250	0.000	0.0000
L38	60.5000-60.2500	A	0.000	0.000	1.095	0.000	0.0029
		B	0.000	0.000	1.095	0.000	0.0068
		C	0.000	0.000	1.095	0.000	0.0000
L39	60.2500-60.1000	A	0.000	0.000	0.657	0.000	0.0017
		B	0.000	0.000	0.657	0.000	0.0041
		C	0.000	0.000	0.657	0.000	0.0000
L40	60.1000-59.8500	A	0.000	0.000	1.095	0.000	0.0029
		B	0.000	0.000	1.095	0.000	0.0068
		C	0.000	0.000	0.882	0.000	0.0000
L41	59.8500-59.1000	A	0.000	0.000	3.285	0.000	0.0087
		B	0.000	0.000	3.285	0.000	0.0204
		C	0.000	0.000	2.223	0.000	0.0000
L42	59.1000-58.8500	A	0.000	0.000	1.095	0.000	0.0029
		B	0.000	0.000	1.095	0.000	0.0068
		C	0.000	0.000	0.741	0.000	0.0000
L43	58.8500-55.4000	A	0.000	0.000	14.969	0.000	0.0400
		B	0.000	0.000	14.969	0.000	0.0940
		C	0.000	0.000	10.224	0.000	0.0000
L44	55.4000-55.1500	A	0.000	0.000	1.095	0.000	0.0029
		B	0.000	0.000	1.095	0.000	0.0068
		C	0.000	0.000	0.741	0.000	0.0000

Tower Sectio n	Tower Elevation ft	Face	A _R ft ²	A _F ft ²	C _A A _A In Face ft ²	C _A A _A Out Face ft ²	Weight K
L45	55.1500-54.7500	A	0.000	0.000	1.752	0.000	0.0046
		B	0.000	0.000	1.752	0.000	0.0109
		C	0.000	0.000	1.185	0.000	0.0000
L46	54.7500-54.5000	A	0.000	0.000	1.095	0.000	0.0029
		B	0.000	0.000	1.095	0.000	0.0068
		C	0.000	0.000	0.741	0.000	0.0000
L47	54.5000-49.5000	A	0.000	0.000	19.192	0.000	0.0580
		B	0.000	0.000	19.192	0.000	0.1363
		C	0.000	0.000	12.108	0.000	0.0000
L48	49.5000-44.5000	A	0.000	0.000	16.483	0.000	0.0580
		B	0.000	0.000	16.483	0.000	0.1363
		C	0.000	0.000	10.817	0.000	0.0000
L49	44.5000-41.3000	A	0.000	0.000	10.549	0.000	0.0371
		B	0.000	0.000	10.549	0.000	0.0872
		C	0.000	0.000	10.549	0.000	0.0000
L50	41.3000-41.0500	A	0.000	0.000	0.824	0.000	0.0029
		B	0.000	0.000	0.824	0.000	0.0068
		C	0.000	0.000	0.824	0.000	0.0000
L51	41.0500-34.0000	A	0.000	0.000	27.575	0.000	0.0818
		B	0.000	0.000	27.575	0.000	0.1921
		C	0.000	0.000	27.575	0.000	0.0000
L52	34.0000-33.0000	A	0.000	0.000	4.380	0.000	0.0116
		B	0.000	0.000	4.380	0.000	0.0273
		C	0.000	0.000	4.380	0.000	0.0000
L53	33.0000-31.5000	A	0.000	0.000	6.570	0.000	0.0174
		B	0.000	0.000	6.570	0.000	0.0409
		C	0.000	0.000	6.570	0.000	0.0000
L54	31.5000-31.2500	A	0.000	0.000	1.317	0.000	0.0029
		B	0.000	0.000	1.095	0.000	0.0068
		C	0.000	0.000	1.095	0.000	0.0000
L55	31.2500-30.5000	A	0.000	0.000	3.553	0.000	0.0087
		B	0.000	0.000	3.285	0.000	0.0204
		C	0.000	0.000	3.285	0.000	0.0000
L56	30.5000-30.2500	A	0.000	0.000	1.097	0.000	0.0029
		B	0.000	0.000	1.097	0.000	0.0068
		C	0.000	0.000	1.097	0.000	0.0000
L57	30.2500-25.7500	A	0.000	0.000	19.747	0.000	0.0522
		B	0.000	0.000	19.747	0.000	0.1226
		C	0.000	0.000	19.747	0.000	0.0000
L58	25.7500-25.5000	A	0.000	0.000	1.097	0.000	0.0029
		B	0.000	0.000	1.097	0.000	0.0068
		C	0.000	0.000	1.097	0.000	0.0000
L59	25.5000-24.7000	A	0.000	0.000	3.511	0.000	0.0093
		B	0.000	0.000	3.511	0.000	0.0218
		C	0.000	0.000	3.511	0.000	0.0000
L60	24.7000-24.4500	A	0.000	0.000	1.097	0.000	0.0029
		B	0.000	0.000	1.097	0.000	0.0068
		C	0.000	0.000	1.097	0.000	0.0000
L61	24.4500-24.0000	A	0.000	0.000	1.975	0.000	0.0052
		B	0.000	0.000	1.975	0.000	0.0123
		C	0.000	0.000	1.975	0.000	0.0000
L62	24.0000-23.7500	A	0.000	0.000	1.097	0.000	0.0029
		B	0.000	0.000	1.097	0.000	0.0068
		C	0.000	0.000	1.097	0.000	0.0000
L63	23.7500-18.7500	A	0.000	0.000	15.000	0.000	0.0580
		B	0.000	0.000	15.000	0.000	0.1363
		C	0.000	0.000	17.337	0.000	0.0000
L64	18.7500-14.1000	A	0.000	0.000	9.896	0.000	0.0539
		B	0.000	0.000	9.896	0.000	0.1267
		C	0.000	0.000	15.368	0.000	0.0000
L65	14.1000-13.8000	A	0.000	0.000	0.805	0.000	0.0035
		B	0.000	0.000	0.805	0.000	0.0082
		C	0.000	0.000	0.992	0.000	0.0000
L66	13.8000-13.6500	A	0.000	0.000	0.403	0.000	0.0017
		B	0.000	0.000	0.403	0.000	0.0041
		C	0.000	0.000	0.496	0.000	0.0000
L67	13.6500-10.5000	A	0.000	0.000	7.569	0.000	0.0365
		B	0.000	0.000	8.458	0.000	0.0858
		C	0.000	0.000	10.411	0.000	0.0000

Tower Section	Tower Elevation	Face	A_R	A_F	C_{AA} In Face	C_{AA} Out Face	Weight
<i>n</i>	ft		ft ²	ft ²	ft ²	ft ²	K
L68	10.5000-10.2500	A	0.000	0.000	0.449	0.000	0.0029
		B	0.000	0.000	0.671	0.000	0.0068
		C	0.000	0.000	0.700	0.000	0.0000
L69	10.2500-5.2500	A	0.000	0.000	8.983	0.000	0.0580
		B	0.000	0.000	13.425	0.000	0.1363
		C	0.000	0.000	14.002	0.000	0.0000
L70	5.2500-3.0000	A	0.000	0.000	4.043	0.000	0.0261
		B	0.000	0.000	6.041	0.000	0.0613
		C	0.000	0.000	6.301	0.000	0.0000
L71	3.0000-2.9000	A	0.000	0.000	0.180	0.000	0.0012
		B	0.000	0.000	0.269	0.000	0.0027
		C	0.000	0.000	0.280	0.000	0.0000
L72	2.9000-2.7500	A	0.000	0.000	0.270	0.000	0.0017
		B	0.000	0.000	0.403	0.000	0.0041
		C	0.000	0.000	0.420	0.000	0.0000
L73	2.7500-2.6500	A	0.000	0.000	0.180	0.000	0.0012
		B	0.000	0.000	0.269	0.000	0.0027
		C	0.000	0.000	0.280	0.000	0.0000
L74	2.6500-2.5000	A	0.000	0.000	0.270	0.000	0.0017
		B	0.000	0.000	0.403	0.000	0.0041
		C	0.000	0.000	0.420	0.000	0.0000
L75	2.5000-2.2500	A	0.000	0.000	0.449	0.000	0.0029
		B	0.000	0.000	0.671	0.000	0.0068
		C	0.000	0.000	0.700	0.000	0.0000
L76	2.2500-1.9000	A	0.000	0.000	0.629	0.000	0.0041
		B	0.000	0.000	0.940	0.000	0.0095
		C	0.000	0.000	0.980	0.000	0.0000
L77	1.9000-1.6500	A	0.000	0.000	0.449	0.000	0.0029
		B	0.000	0.000	0.671	0.000	0.0068
		C	0.000	0.000	0.700	0.000	0.0000
L78	1.6500-0.0000	A	0.000	0.000	2.465	0.000	0.0191
		B	0.000	0.000	3.930	0.000	0.0450
		C	0.000	0.000	3.665	0.000	0.0000

Feed Line/Linear Appurtenances Section Areas - With Ice

Tower Section	Tower Elevation	Face or Leg	Ice Thickness	A_R	A_F	C_{AA} In Face	C_{AA} Out Face	Weight
<i>n</i>	ft		in	ft ²	ft ²	ft ²	ft ²	K
L1	160.0000-155.0000	A	2.338	0.000	0.000	0.000	0.000	0.0000
		B		0.000	0.000	1.169	0.000	0.0319
		C		0.000	0.000	0.000	0.000	0.0000
L2	155.0000-150.0000	A	2.331	0.000	0.000	0.000	0.000	0.0000
		B		0.000	0.000	5.827	0.000	0.1593
		C		0.000	0.000	0.000	0.000	0.0000
L3	150.0000-146.0000	A	2.324	0.000	0.000	0.000	0.000	0.0000
		B		0.000	0.000	4.648	0.000	0.1271
		C		0.000	0.000	0.000	0.000	0.0000
L4	146.0000-141.0000	A	2.317	0.000	0.000	0.000	0.000	0.0000
		B		0.000	0.000	8.687	0.000	0.2129
		C		0.000	0.000	0.000	0.000	0.0000
L5	141.0000-136.0000	A	2.308	0.000	0.000	0.000	0.000	0.0000
		B		0.000	0.000	8.657	0.000	0.2248
		C		0.000	0.000	0.000	0.000	0.0000
L6	136.0000-131.0000	A	2.300	0.000	0.000	0.575	0.000	0.0176
		B		0.000	0.000	8.625	0.000	0.2324
		C		0.000	0.000	0.000	0.000	0.0000
L7	131.0000-126.0000	A	2.291	0.000	0.000	4.582	0.000	0.1084
		B		0.000	0.000	8.592	0.000	0.2317
		C		0.000	0.000	0.000	0.000	0.0000
L8	126.0000-121.0000	A	2.282	0.000	0.000	8.036	0.000	0.1538
		B		0.000	0.000	10.888	0.000	0.2631
		C		0.000	0.000	2.330	0.000	0.0321
L9	121.0000-120.1000	A	2.277	0.000	0.000	2.334	0.000	0.0399
		B		0.000	0.000	2.847	0.000	0.0595
		C		0.000	0.000	1.310	0.000	0.0180

Tower Section	Tower Elevation ft	Face or Leg	Ice Thickness in	A _R ft ²	A _F ft ²	C _A A _A In Face ft ²	C _A A _A Out Face ft ²	Weight K
L10	120.1000-119.8500	A	2.276	0.000	0.000	0.648	0.000	0.0111
		B		0.000	0.000	0.790	0.000	0.0165
		C		0.000	0.000	0.364	0.000	0.0050
L11	119.8500-117.5000	A	2.273	0.000	0.000	6.089	0.000	0.1039
		B		0.000	0.000	9.232	0.000	0.1811
		C		0.000	0.000	3.418	0.000	0.0470
L12	117.5000-117.2500	A	2.271	0.000	0.000	0.647	0.000	0.0110
		B		0.000	0.000	1.090	0.000	0.0208
		C		0.000	0.000	0.364	0.000	0.0050
L13	117.2500-115.5000	A	2.269	0.000	0.000	6.335	0.000	0.1031
		B		0.000	0.000	7.628	0.000	0.1456
		C		0.000	0.000	4.350	0.000	0.0608
L14	115.5000-115.2500	A	2.267	0.000	0.000	0.948	0.000	0.0153
		B		0.000	0.000	1.089	0.000	0.0208
		C		0.000	0.000	0.664	0.000	0.0093
L15	115.2500-110.2500	A	2.261	0.000	0.000	18.926	0.000	0.3057
		B		0.000	0.000	21.753	0.000	0.4144
		C		0.000	0.000	13.273	0.000	0.1852
L16	110.2500-103.7500	A	2.250	0.000	0.000	24.535	0.000	0.3948
		B		0.000	0.000	28.191	0.000	0.5357
		C		0.000	0.000	17.224	0.000	0.2390
L17	103.7500-102.5000	A	2.241	0.000	0.000	4.718	0.000	0.0759
		B		0.000	0.000	5.421	0.000	0.1030
		C		0.000	0.000	3.312	0.000	0.0460
L18	102.5000-100.5000	A	2.238	0.000	0.000	7.528	0.000	0.1207
		B		0.000	0.000	8.647	0.000	0.1640
		C		0.000	0.000	5.145	0.000	0.0710
L19	100.5000-100.2500	A	2.235	0.000	0.000	1.302	0.000	0.0199
		B		0.000	0.000	1.442	0.000	0.0254
		C		0.000	0.000	0.661	0.000	0.0091
L20	100.2500-98.5000	A	2.233	0.000	0.000	9.111	0.000	0.1394
		B		0.000	0.000	9.490	0.000	0.1690
		C		0.000	0.000	4.626	0.000	0.0637
L21	98.5000-98.2500	A	2.231	0.000	0.000	1.301	0.000	0.0199
		B		0.000	0.000	1.141	0.000	0.0211
		C		0.000	0.000	0.661	0.000	0.0091
L22	98.2500-93.2500	A	2.225	0.000	0.000	21.505	0.000	0.3335
		B		0.000	0.000	22.792	0.000	0.4210
		C		0.000	0.000	8.718	0.000	0.1180
L23	93.2500-90.5000	A	2.216	0.000	0.000	10.839	0.000	0.1690
		B		0.000	0.000	12.363	0.000	0.2286
		C		0.000	0.000	3.969	0.000	0.0530
L24	90.5000-90.2500	A	2.212	0.000	0.000	1.102	0.000	0.0167
		B		0.000	0.000	1.240	0.000	0.0221
		C		0.000	0.000	0.361	0.000	0.0048
L25	90.2500-85.2500	A	2.205	0.000	0.000	22.330	0.000	0.3378
		B		0.000	0.000	25.087	0.000	0.4458
		C		0.000	0.000	7.527	0.000	0.1010
L26	85.2500-83.5000	A	2.197	0.000	0.000	9.941	0.000	0.1515
		B		0.000	0.000	10.902	0.000	0.1892
		C		0.000	0.000	7.536	0.000	0.1046
L27	83.5000-83.2500	A	2.194	0.000	0.000	1.420	0.000	0.0216
		B		0.000	0.000	1.557	0.000	0.0270
		C		0.000	0.000	1.142	0.000	0.0158
L28	83.2500-80.7500	A	2.191	0.000	0.000	14.186	0.000	0.2157
		B		0.000	0.000	15.555	0.000	0.2694
		C		0.000	0.000	11.417	0.000	0.1573
L29	80.7500-80.5000	A	2.187	0.000	0.000	1.418	0.000	0.0215
		B		0.000	0.000	1.554	0.000	0.0269
		C		0.000	0.000	1.141	0.000	0.0157
L30	80.5000-80.2500	A	2.186	0.000	0.000	1.418	0.000	0.0215
		B		0.000	0.000	1.554	0.000	0.0269
		C		0.000	0.000	1.141	0.000	0.0157
L31	80.2500-77.5000	A	2.182	0.000	0.000	15.581	0.000	0.2361
		B		0.000	0.000	17.082	0.000	0.2951
		C		0.000	0.000	12.548	0.000	0.1722
L32	77.5000-77.2500	A	2.178	0.000	0.000	1.415	0.000	0.0214
		B		0.000	0.000	1.552	0.000	0.0268
		C		0.000	0.000	1.140	0.000	0.0156

Tower Section	Tower Elevation ft	Face or Leg	Ice Thickness in	A _R ft ²	A _F ft ²	C _A A _A In Face ft ²	C _A A _A Out Face ft ²	Weight K
L33	77.2500-68.5000	A	2.165	0.000	0.000	44.291	0.000	0.6639
		B		0.000	0.000	49.026	0.000	0.8510
		C		0.000	0.000	34.719	0.000	0.4622
L34	68.5000-68.0000	A	2.151	0.000	0.000	2.182	0.000	0.0325
		B		0.000	0.000	2.453	0.000	0.0432
		C		0.000	0.000	1.636	0.000	0.0210
L35	68.0000-64.2500	A	2.144	0.000	0.000	19.996	0.000	0.2953
		B		0.000	0.000	22.006	0.000	0.3750
		C		0.000	0.000	15.936	0.000	0.2096
L36	64.2500-64.0000	A	2.137	0.000	0.000	1.421	0.000	0.0209
		B		0.000	0.000	1.555	0.000	0.0262
		C		0.000	0.000	1.151	0.000	0.0152
L37	64.0000-60.5000	A	2.131	0.000	0.000	21.096	0.000	0.3090
		B		0.000	0.000	21.738	0.000	0.3660
		C		0.000	0.000	16.107	0.000	0.2123
L38	60.5000-60.2500	A	2.125	0.000	0.000	1.744	0.000	0.0254
		B		0.000	0.000	1.877	0.000	0.0307
		C		0.000	0.000	1.476	0.000	0.0197
L39	60.2500-60.1000	A	2.124	0.000	0.000	1.046	0.000	0.0152
		B		0.000	0.000	1.126	0.000	0.0184
		C		0.000	0.000	0.886	0.000	0.0118
L40	60.1000-59.8500	A	2.123	0.000	0.000	1.744	0.000	0.0254
		B		0.000	0.000	1.876	0.000	0.0306
		C		0.000	0.000	1.201	0.000	0.0163
L41	59.8500-59.1000	A	2.121	0.000	0.000	5.229	0.000	0.0760
		B		0.000	0.000	5.627	0.000	0.0918
		C		0.000	0.000	3.053	0.000	0.0420
L42	59.1000-58.8500	A	2.120	0.000	0.000	1.743	0.000	0.0253
		B		0.000	0.000	1.875	0.000	0.0306
		C		0.000	0.000	1.018	0.000	0.0140
L43	58.8500-55.4000	A	2.113	0.000	0.000	23.836	0.000	0.3455
		B		0.000	0.000	25.658	0.000	0.4183
		C		0.000	0.000	14.030	0.000	0.1921
L44	55.4000-55.1500	A	2.106	0.000	0.000	1.739	0.000	0.0251
		B		0.000	0.000	1.870	0.000	0.0304
		C		0.000	0.000	1.016	0.000	0.0139
L45	55.1500-54.7500	A	2.105	0.000	0.000	2.781	0.000	0.0401
		B		0.000	0.000	2.991	0.000	0.0485
		C		0.000	0.000	1.625	0.000	0.0222
L46	54.7500-54.5000	A	2.103	0.000	0.000	1.738	0.000	0.0251
		B		0.000	0.000	1.869	0.000	0.0303
		C		0.000	0.000	1.016	0.000	0.0138
L47	54.5000-49.5000	A	2.093	0.000	0.000	31.344	0.000	0.4504
		B		0.000	0.000	33.960	0.000	0.5554
		C		0.000	0.000	16.935	0.000	0.2272
L48	49.5000-44.5000	A	2.072	0.000	0.000	27.879	0.000	0.3977
		B		0.000	0.000	30.469	0.000	0.5022
		C		0.000	0.000	15.375	0.000	0.1992
L49	44.5000-41.3000	A	2.053	0.000	0.000	17.776	0.000	0.2517
		B		0.000	0.000	19.419	0.000	0.3183
		C		0.000	0.000	14.491	0.000	0.1817
L50	41.3000-41.0500	A	2.045	0.000	0.000	1.386	0.000	0.0196
		B		0.000	0.000	1.514	0.000	0.0248
		C		0.000	0.000	1.131	0.000	0.0141
L51	41.0500-34.0000	A	2.026	0.000	0.000	44.283	0.000	0.6186
		B		0.000	0.000	47.853	0.000	0.7643
		C		0.000	0.000	37.142	0.000	0.4661
L52	34.0000-33.0000	A	2.003	0.000	0.000	6.860	0.000	0.0956
		B		0.000	0.000	7.366	0.000	0.1163
		C		0.000	0.000	5.847	0.000	0.0740
L53	33.0000-31.5000	A	1.995	0.000	0.000	10.232	0.000	0.1408
		B		0.000	0.000	10.980	0.000	0.1716
		C		0.000	0.000	8.736	0.000	0.1088
L54	31.5000-31.2500	A	1.990	0.000	0.000	2.025	0.000	0.0277
		B		0.000	0.000	1.828	0.000	0.0285
		C		0.000	0.000	1.455	0.000	0.0181
L55	31.2500-30.5000	A	1.987	0.000	0.000	5.476	0.000	0.0751
		B		0.000	0.000	5.481	0.000	0.0854
		C		0.000	0.000	4.363	0.000	0.0541

Tower Section	Tower Elevation ft	Face or Leg	Ice Thickness in	A _R ft ²	A _F ft ²	C _A A _A In Face ft ²	C _A A _A Out Face ft ²	Weight K
L56	30.5000-30.2500	A	1.983	0.000	0.000	1.704	0.000	0.0234
		B		0.000	0.000	1.828	0.000	0.0285
		C		0.000	0.000	1.456	0.000	0.0181
L57	30.2500-25.7500	A	1.967	0.000	0.000	30.582	0.000	0.4171
		B		0.000	0.000	32.796	0.000	0.5088
		C		0.000	0.000	26.156	0.000	0.3224
L58	25.7500-25.5000	A	1.950	0.000	0.000	1.694	0.000	0.0229
		B		0.000	0.000	1.816	0.000	0.0280
		C		0.000	0.000	1.450	0.000	0.0177
L59	25.5000-24.7000	A	1.946	0.000	0.000	5.416	0.000	0.0732
		B		0.000	0.000	5.806	0.000	0.0894
		C		0.000	0.000	4.638	0.000	0.0565
L60	24.7000-24.4500	A	1.942	0.000	0.000	1.691	0.000	0.0228
		B		0.000	0.000	1.813	0.000	0.0279
		C		0.000	0.000	1.449	0.000	0.0176
L61	24.4500-24.0000	A	1.939	0.000	0.000	3.043	0.000	0.0410
		B		0.000	0.000	3.261	0.000	0.0501
		C		0.000	0.000	2.607	0.000	0.0316
L62	24.0000-23.7500	A	1.936	0.000	0.000	1.690	0.000	0.0227
		B		0.000	0.000	1.811	0.000	0.0278
		C		0.000	0.000	1.448	0.000	0.0175
L63	23.7500-18.7500	A	1.914	0.000	0.000	25.073	0.000	0.3434
		B		0.000	0.000	27.465	0.000	0.4440
		C		0.000	0.000	23.258	0.000	0.2735
L64	18.7500-14.1000	A	1.865	0.000	0.000	18.191	0.000	0.2585
		B		0.000	0.000	20.359	0.000	0.3510
		C		0.000	0.000	20.572	0.000	0.2345
L65	14.1000-13.8000	A	1.835	0.000	0.000	1.404	0.000	0.0193
		B		0.000	0.000	1.542	0.000	0.0252
		C		0.000	0.000	1.322	0.000	0.0148
L66	13.8000-13.6500	A	1.832	0.000	0.000	0.702	0.000	0.0096
		B		0.000	0.000	0.770	0.000	0.0126
		C		0.000	0.000	0.661	0.000	0.0074
L67	13.6500-10.5000	A	1.809	0.000	0.000	13.409	0.000	0.1842
		B		0.000	0.000	16.083	0.000	0.2613
		C		0.000	0.000	13.829	0.000	0.1526
L68	10.5000-10.2500	A	1.781	0.000	0.000	0.845	0.000	0.0118
		B		0.000	0.000	1.268	0.000	0.0204
		C		0.000	0.000	0.925	0.000	0.0109
L69	10.2500-5.2500	A	1.730	0.000	0.000	16.681	0.000	0.2287
		B		0.000	0.000	25.016	0.000	0.3972
		C		0.000	0.000	18.377	0.000	0.2102
L70	5.2500-3.0000	A	1.624	0.000	0.000	7.302	0.000	0.0962
		B		0.000	0.000	10.946	0.000	0.1685
		C		0.000	0.000	8.150	0.000	0.0871
L71	3.0000-2.9000	A	1.571	0.000	0.000	0.320	0.000	0.0041
		B		0.000	0.000	0.479	0.000	0.0073
		C		0.000	0.000	0.360	0.000	0.0037
L72	2.9000-2.7500	A	1.564	0.000	0.000	0.479	0.000	0.0062
		B		0.000	0.000	0.718	0.000	0.0109
		C		0.000	0.000	0.539	0.000	0.0055
L73	2.7500-2.6500	A	1.557	0.000	0.000	0.319	0.000	0.0041
		B		0.000	0.000	0.478	0.000	0.0072
		C		0.000	0.000	0.359	0.000	0.0037
L74	2.6500-2.5000	A	1.550	0.000	0.000	0.477	0.000	0.0061
		B		0.000	0.000	0.715	0.000	0.0108
		C		0.000	0.000	0.538	0.000	0.0055
L75	2.5000-2.2500	A	1.537	0.000	0.000	0.793	0.000	0.0101
		B		0.000	0.000	1.188	0.000	0.0178
		C		0.000	0.000	0.895	0.000	0.0090
L76	2.2500-1.9000	A	1.517	0.000	0.000	1.103	0.000	0.0139
		B		0.000	0.000	1.653	0.000	0.0246
		C		0.000	0.000	1.249	0.000	0.0124
L77	1.9000-1.6500	A	1.493	0.000	0.000	0.783	0.000	0.0098
		B		0.000	0.000	1.173	0.000	0.0174
		C		0.000	0.000	0.889	0.000	0.0087
L78	1.6500-0.0000	A	1.383	0.000	0.000	4.373	0.000	0.0547
		B		0.000	0.000	6.865	0.000	0.1022
		C		0.000	0.000	4.608	0.000	0.0416

Feed Line Center of Pressure

Section	Elevation <i>ft</i>	CP_x <i>in</i>	CP_z <i>in</i>	CP_x <i>Ice</i> <i>in</i>	CP_z <i>Ice</i> <i>in</i>
L1	160.0000-155.0000	0.0000	0.0000	0.3969	-0.6112
L2	155.0000-150.0000	0.0000	0.0000	1.1406	-1.7564
L3	150.0000-146.0000	0.0000	0.0000	1.1394	-1.7545
L4	146.0000-141.0000	0.0000	0.0000	2.0194	-2.2428
L5	141.0000-136.0000	0.0000	0.0000	2.0680	-2.2968
L6	136.0000-131.0000	0.0000	0.0000	1.8423	-2.3439
L7	131.0000-126.0000	0.0000	0.0000	0.3511	-2.2091
L8	126.0000-121.0000	0.0000	0.0000	0.0070	-1.8674
L9	121.0000-120.1000	0.0000	0.0000	0.0055	-1.4704
L10	120.1000-119.8500	0.0000	0.0000	0.0056	-1.4757
L11	119.8500-117.5000	1.1612	0.5600	0.7748	-1.0330
L12	117.5000-117.2500	1.7421	0.8403	1.1794	-0.8046
L13	117.2500-115.5000	0.2054	0.0991	0.1515	-1.1356
L14	115.5000-115.2500	0.0000	0.0000	0.0045	-1.1884
L15	115.2500-110.2500	0.0000	0.0000	0.0045	-1.2043
L16	110.2500-103.7500	0.0000	0.0000	0.0047	-1.2386
L17	103.7500-102.5000	0.0000	0.0000	0.0046	-1.2298
L18	102.5000-100.5000	-0.0908	-0.0617	-0.0552	-1.2838
L19	100.5000-100.2500	0.0000	-1.5597	0.0040	-2.1728
L20	100.2500-98.5000	-0.3447	-1.7690	-0.2652	-2.3530
L21	98.5000-98.2500	-1.2787	-2.3237	-0.9828	-2.8143
L22	98.2500-93.2500	-0.3647	-2.1448	-0.2686	-2.7516
L23	93.2500-90.5000	0.0714	-2.0693	0.0532	-2.7526
L24	90.5000-90.2500	-0.7400	-2.4169	-0.3626	-2.9093
L25	90.2500-85.2500	-0.6407	-2.3597	-0.3067	-2.8902
L26	85.2500-83.5000	-0.6910	-0.1348	-0.4859	-1.1815
L27	83.5000-83.2500	-0.9222	0.0290	-0.6612	-1.0522
L28	83.2500-80.7500	-0.9279	0.0292	-0.6660	-1.0585
L29	80.7500-80.5000	-0.9341	0.0294	-0.6710	-1.0650
L30	80.5000-80.2500	-0.9350	0.0294	-0.6718	-1.0660
L31	80.2500-77.5000	-0.9412	0.0296	-0.6770	-1.0727
L32	77.5000-77.2500	-0.9469	0.0298	-0.6819	-1.0789
L33	77.2500-68.5000	-1.7627	-0.2441	-1.2176	-1.3780
L34	68.5000-68.0000	-2.9940	-0.6647	-1.9546	-1.7799
L35	68.0000-64.2500	-1.3877	-0.1096	-0.9609	-1.2435
L36	64.2500-64.0000	-0.9485	0.0441	-0.6643	-1.0879
L37	64.0000-60.5000	-0.6390	-0.2701	-0.3903	-1.3600
L38	60.5000-60.2500	-0.7132	0.0000	-0.5220	-0.9655
L39	60.2500-60.1000	-0.7138	0.0000	-0.5225	-0.9661
L40	60.1000-59.8500	0.2075	-0.6532	0.1887	-1.5060
L41	59.8500-59.1000	0.8821	-1.1320	0.6986	-1.8946
L42	59.1000-58.8500	0.8839	-1.1343	0.7002	-1.8984
L43	58.8500-55.4000	0.9445	-1.1148	0.7466	-1.8938

Section	Elevation	CP _x	CP _z	CP _x Ice	CP _z Ice
	ft	in	in	in	in
L44	55.4000-55.1500	0.8965	-1.1498	0.7118	-1.9242
L45	55.1500-54.7500	0.8976	-1.1512	0.7128	-1.9264
L46	54.7500-54.5000	0.8983	-1.1521	0.7137	-1.9281
L47	54.5000-49.5000	0.2782	-1.6068	0.2618	-2.3267
L48	49.5000-44.5000	-0.9499	-1.8561	-0.5952	-2.5639
L49	44.5000-41.3000	-2.4890	-0.6305	-1.7562	-1.6299
L50	41.3000-41.0500	-2.5040	-0.6343	-1.7694	-1.6383
L51	41.0500-34.0000	-1.4400	-0.2420	-1.0571	-1.2704
L52	34.0000-33.0000	-0.7773	0.0000	-0.5814	-1.0225
L53	33.0000-31.5000	-0.7807	0.0000	-0.5864	-1.0179
L54	31.5000-31.2500	0.3014	-1.0976	0.3750	-1.9573
L55	31.2500-30.5000	-0.3343	-0.4630	-0.2117	-1.3951
L56	30.5000-30.2500	-0.8863	0.0411	-0.6541	-0.9944
L57	30.2500-25.7500	-0.8934	0.0415	-0.6604	-0.9976
L58	25.7500-25.5000	-0.9005	0.0418	-0.6669	-1.0002
L59	25.5000-24.7000	-0.9021	0.0419	-0.6683	-1.0007
L60	24.7000-24.4500	-0.9035	0.0419	-0.6696	-1.0009
L61	24.4500-24.0000	-0.9045	0.0420	-0.6706	-1.0012
L62	24.0000-23.7500	-0.9060	0.0420	-0.6718	-1.0018
L63	23.7500-18.7500	-1.8723	-0.0375	-1.2995	-1.2588
L64	18.7500-14.1000	-0.7730	1.4818	-0.4354	-0.2591
L65	14.1000-13.8000	-0.7088	2.3485	-0.4088	0.5987
L66	13.8000-13.6500	-0.7092	2.3500	-0.4093	0.6008
L67	13.6500-10.5000	-1.2485	2.9589	-0.8475	1.0750
L68	10.5000-10.2500	-1.6324	3.8886	-1.1646	1.7099
L69	10.2500-5.2500	-1.6437	3.9142	-1.1805	1.7593
L70	5.2500-3.0000	-1.6592	3.9494	-1.2073	1.8555
L71	3.0000-2.9000	-1.6640	3.9604	-1.2187	1.9024
L72	2.9000-2.7500	-1.6643	3.9609	-1.2199	1.9081
L73	2.7500-2.6500	-1.6648	3.9622	-1.2213	1.9143
L74	2.6500-2.5000	-1.6653	3.9634	-1.2228	1.9207
L75	2.5000-2.2500	-1.6661	3.9650	-1.2252	1.9314
L76	2.2500-1.9000	-1.6674	3.9679	-1.2292	1.9493
L77	1.9000-1.6500	-1.6684	3.9703	-1.2334	1.9695
L78	1.6500-0.0000	-1.9268	4.3105	-1.4549	2.1741

Note: For pole sections, center of pressure calculations do not consider feed line shielding.

Shielding Factor Ka

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L1	1	LDF7-50A(1-5/8")	155.00 - 156.00	1.0000	1.0000
L1	4	2" Rigid Conduit	155.00 - 156.00	1.0000	1.0000
L2	1	LDF7-50A(1-5/8")	150.00 - 155.00	1.0000	1.0000
L2	4	2" Rigid Conduit	150.00 - 155.00	1.0000	1.0000
L3	1	LDF7-50A(1-5/8")	146.00 - 150.00	1.0000	1.0000
L3	4	2" Rigid Conduit	146.00 - 150.00	1.0000	1.0000
L4	1	LDF7-50A(1-5/8")	141.00 - 146.00	1.0000	1.0000
L4	4	2" Rigid Conduit	141.00 - 146.00	1.0000	1.0000
L4	6	HB114-1-08U4-M5J(1-1/4")	141.00 - 146.00	1.0000	1.0000
L5	1	LDF7-50A(1-5/8")	136.00 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
			141.00		
L5	4	2" Rigid Conduit	136.00 - 141.00	1.0000	1.0000
L5	6	HB114-1-08U4-M5J(1-1/4")	136.00 - 141.00	1.0000	1.0000
L6	1	LDF7-50A(1-5/8")	131.00 - 136.00	1.0000	1.0000
L6	4	2" Rigid Conduit	131.00 - 136.00	1.0000	1.0000
L6	6	HB114-1-08U4-M5J(1-1/4")	131.00 - 136.00	1.0000	1.0000
L6	10	561(1-5/8")	131.00 - 132.00	1.0000	1.0000
L7	1	LDF7-50A(1-5/8")	126.00 - 131.00	1.0000	1.0000
L7	4	2" Rigid Conduit	126.00 - 131.00	1.0000	1.0000
L7	6	HB114-1-08U4-M5J(1-1/4")	126.00 - 131.00	1.0000	1.0000
L7	10	561(1-5/8")	126.00 - 131.00	1.0000	1.0000
L7	14	LDF4P-50A(1/2")	126.00 - 129.00	1.0000	1.0000
L8	1	LDF7-50A(1-5/8")	121.00 - 126.00	1.0000	1.0000
L8	4	2" Rigid Conduit	121.00 - 126.00	1.0000	1.0000
L8	6	HB114-1-08U4-M5J(1-1/4")	121.00 - 126.00	1.0000	1.0000
L8	10	561(1-5/8")	121.00 - 126.00	1.0000	1.0000
L8	14	LDF4P-50A(1/2")	121.00 - 126.00	1.0000	1.0000
L8	58	6" x 1" Flat Plate (G)	121.00 - 122.60	1.0000	1.0000
L8	59	6" x 1" Flat Plate (G)	121.00 - 122.60	1.0000	1.0000
L8	60	6" x 1" Flat Plate (G)	121.00 - 122.60	1.0000	1.0000
L9	1	LDF7-50A(1-5/8")	120.10 - 121.00	1.0000	1.0000
L9	4	2" Rigid Conduit	120.10 - 121.00	1.0000	1.0000
L9	6	HB114-1-08U4-M5J(1-1/4")	120.10 - 121.00	1.0000	1.0000
L9	10	561(1-5/8")	120.10 - 121.00	1.0000	1.0000
L9	14	LDF4P-50A(1/2")	120.10 - 121.00	1.0000	1.0000
L9	58	6" x 1" Flat Plate (G)	120.10 - 121.00	1.0000	1.0000
L9	59	6" x 1" Flat Plate (G)	120.10 - 121.00	1.0000	1.0000
L9	60	6" x 1" Flat Plate (G)	120.10 - 121.00	1.0000	1.0000
L10	1	LDF7-50A(1-5/8")	119.85 - 120.10	1.0000	1.0000
L10	4	2" Rigid Conduit	119.85 - 120.10	1.0000	1.0000
L10	6	HB114-1-08U4-M5J(1-1/4")	119.85 - 120.10	1.0000	1.0000
L10	10	561(1-5/8")	119.85 - 120.10	1.0000	1.0000
L10	14	LDF4P-50A(1/2")	119.85 - 120.10	1.0000	1.0000
L10	58	6" x 1" Flat Plate (G)	119.85 - 120.10	1.0000	1.0000
L10	59	6" x 1" Flat Plate (G)	119.85 - 120.10	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L10	60	6" x 1" Flat Plate (G)	119.85 - 120.10	1.0000	1.0000
L11	1	LDF7-50A(1-5/8")	117.50 - 119.85	1.0000	1.0000
L11	4	2" Rigid Conduit	117.50 - 119.85	1.0000	1.0000
L11	6	HB114-1-08U4-M5J(1-1/4")	117.50 - 119.85	1.0000	1.0000
L11	10	561(1-5/8")	117.50 - 119.85	1.0000	1.0000
L11	14	LDF4P-50A(1/2")	117.50 - 119.85	1.0000	1.0000
L11	52	4.5" x 1" Flat Plate (G)	117.50 - 119.00	1.0000	1.0000
L11	58	6" x 1" Flat Plate (G)	117.50 - 119.85	1.0000	1.0000
L11	59	6" x 1" Flat Plate (G)	117.50 - 119.85	1.0000	1.0000
L11	60	6" x 1" Flat Plate (G)	117.50 - 119.85	1.0000	1.0000
L12	1	LDF7-50A(1-5/8")	117.25 - 117.50	1.0000	1.0000
L12	4	2" Rigid Conduit	117.25 - 117.50	1.0000	1.0000
L12	6	HB114-1-08U4-M5J(1-1/4")	117.25 - 117.50	1.0000	1.0000
L12	10	561(1-5/8")	117.25 - 117.50	1.0000	1.0000
L12	14	LDF4P-50A(1/2")	117.25 - 117.50	1.0000	1.0000
L12	52	4.5" x 1" Flat Plate (G)	117.25 - 117.50	1.0000	1.0000
L12	58	6" x 1" Flat Plate (G)	117.25 - 117.50	1.0000	1.0000
L12	59	6" x 1" Flat Plate (G)	117.25 - 117.50	1.0000	1.0000
L12	60	6" x 1" Flat Plate (G)	117.25 - 117.50	1.0000	1.0000
L13	1	LDF7-50A(1-5/8")	115.50 - 117.25	1.0000	1.0000
L13	4	2" Rigid Conduit	115.50 - 117.25	1.0000	1.0000
L13	6	HB114-1-08U4-M5J(1-1/4")	115.50 - 117.25	1.0000	1.0000
L13	10	561(1-5/8")	115.50 - 117.25	1.0000	1.0000
L13	14	LDF4P-50A(1/2")	115.50 - 117.25	1.0000	1.0000
L13	50	4.5" x 1" Flat Plate (G)	115.50 - 117.00	1.0000	1.0000
L13	51	4.5" x 1" Flat Plate (G)	115.50 - 117.00	1.0000	1.0000
L13	52	4.5" x 1" Flat Plate (G)	115.50 - 117.25	1.0000	1.0000
L13	58	6" x 1" Flat Plate (G)	115.50 - 117.25	1.0000	1.0000
L13	59	6" x 1" Flat Plate (G)	115.50 - 117.25	1.0000	1.0000
L13	60	6" x 1" Flat Plate (G)	115.50 - 117.25	1.0000	1.0000
L14	1	LDF7-50A(1-5/8")	115.25 - 115.50	1.0000	1.0000
L14	4	2" Rigid Conduit	115.25 - 115.50	1.0000	1.0000
L14	6	HB114-1-08U4-M5J(1-1/4")	115.25 - 115.50	1.0000	1.0000
L14	10	561(1-5/8")	115.25 - 115.50	1.0000	1.0000
L14	14	LDF4P-50A(1/2")	115.25 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
			115.50		
L14	50	4.5" x 1" Flat Plate (G)	115.25 - 115.50	1.0000	1.0000
L14	51	4.5" x 1" Flat Plate (G)	115.25 - 115.50	1.0000	1.0000
L14	52	4.5" x 1" Flat Plate (G)	115.25 - 115.50	1.0000	1.0000
L14	58	6" x 1" Flat Plate (G)	115.25 - 115.50	1.0000	1.0000
L14	59	6" x 1" Flat Plate (G)	115.25 - 115.50	1.0000	1.0000
L14	60	6" x 1" Flat Plate (G)	115.25 - 115.50	1.0000	1.0000
L15	1	LDF7-50A(1-5/8")	110.25 - 115.25	1.0000	1.0000
L15	4	2" Rigid Conduit	110.25 - 115.25	1.0000	1.0000
L15	6	HB114-1-08U4-M5J(1-1/4")	110.25 - 115.25	1.0000	1.0000
L15	10	561(1-5/8")	110.25 - 115.25	1.0000	1.0000
L15	14	LDF4P-50A(1/2")	110.25 - 115.25	1.0000	1.0000
L15	50	4.5" x 1" Flat Plate (G)	110.25 - 115.25	1.0000	1.0000
L15	51	4.5" x 1" Flat Plate (G)	110.25 - 115.25	1.0000	1.0000
L15	52	4.5" x 1" Flat Plate (G)	110.25 - 115.25	1.0000	1.0000
L15	58	6" x 1" Flat Plate (G)	110.25 - 115.25	1.0000	1.0000
L15	59	6" x 1" Flat Plate (G)	110.25 - 115.25	1.0000	1.0000
L15	60	6" x 1" Flat Plate (G)	110.25 - 115.25	1.0000	1.0000
L16	1	LDF7-50A(1-5/8")	103.75 - 110.25	1.0000	1.0000
L16	4	2" Rigid Conduit	103.75 - 110.25	1.0000	1.0000
L16	6	HB114-1-08U4-M5J(1-1/4")	103.75 - 110.25	1.0000	1.0000
L16	10	561(1-5/8")	103.75 - 110.25	1.0000	1.0000
L16	14	LDF4P-50A(1/2")	103.75 - 110.25	1.0000	1.0000
L16	50	4.5" x 1" Flat Plate (G)	103.75 - 110.25	1.0000	1.0000
L16	51	4.5" x 1" Flat Plate (G)	103.75 - 110.25	1.0000	1.0000
L16	52	4.5" x 1" Flat Plate (G)	103.75 - 110.25	1.0000	1.0000
L16	58	6" x 1" Flat Plate (G)	103.75 - 110.25	1.0000	1.0000
L16	59	6" x 1" Flat Plate (G)	103.75 - 110.25	1.0000	1.0000
L16	60	6" x 1" Flat Plate (G)	103.75 - 110.25	1.0000	1.0000
L18	1	LDF7-50A(1-5/8")	100.50 - 102.50	1.0000	1.0000
L18	4	2" Rigid Conduit	100.50 - 102.50	1.0000	1.0000
L18	6	HB114-1-08U4-M5J(1-1/4")	100.50 - 102.50	1.0000	1.0000
L18	10	561(1-5/8")	100.50 - 102.50	1.0000	1.0000
L18	14	LDF4P-50A(1/2")	100.50 - 102.50	1.0000	1.0000
L18	50	4.5" x 1" Flat Plate (G)	100.50 - 102.50	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L18	51	4.5" x 1" Flat Plate (G)	100.50 - 102.50	1.0000	1.0000
L18	52	4.5" x 1" Flat Plate (G)	100.50 - 102.50	1.0000	1.0000
L18	58	6" x 1" Flat Plate (G)	100.50 - 102.50	1.0000	1.0000
L18	59	6" x 1" Flat Plate (G)	100.50 - 102.50	1.0000	1.0000
L18	60	6" x 1" Flat Plate (G)	100.60 - 102.50	1.0000	1.0000
L19	1	LDF7-50A(1-5/8")	100.25 - 100.50	1.0000	1.0000
L19	4	2" Rigid Conduit	100.25 - 100.50	1.0000	1.0000
L19	6	HB114-1-08U4-M5J(1-1/4")	100.25 - 100.50	1.0000	1.0000
L19	10	561(1-5/8")	100.25 - 100.50	1.0000	1.0000
L19	14	LDF4P-50A(1/2")	100.25 - 100.50	1.0000	1.0000
L19	33	6" x 1" Flat Plate (G)	100.25 - 100.50	1.0000	1.0000
L19	34	6" x 1" Flat Plate (G)	100.25 - 100.50	1.0000	1.0000
L19	35	6" x 1" Flat Plate (G)	100.25 - 100.50	1.0000	1.0000
L19	50	4.5" x 1" Flat Plate (G)	100.25 - 100.50	1.0000	1.0000
L19	51	4.5" x 1" Flat Plate (G)	100.25 - 100.50	1.0000	1.0000
L19	52	4.5" x 1" Flat Plate (G)	100.25 - 100.50	1.0000	1.0000
L19	58	6" x 1" Flat Plate (G)	100.25 - 100.50	1.0000	1.0000
L19	59	6" x 1" Flat Plate (G)	100.25 - 100.50	1.0000	1.0000
L20	1	LDF7-50A(1-5/8")	98.50 - 100.25	1.0000	1.0000
L20	4	2" Rigid Conduit	98.50 - 100.25	1.0000	1.0000
L20	6	HB114-1-08U4-M5J(1-1/4")	98.50 - 100.25	1.0000	1.0000
L20	10	561(1-5/8")	98.50 - 100.25	1.0000	1.0000
L20	14	LDF4P-50A(1/2")	98.50 - 100.25	1.0000	1.0000
L20	33	6" x 1" Flat Plate (G)	98.50 - 100.25	1.0000	1.0000
L20	34	6" x 1" Flat Plate (G)	98.50 - 100.25	1.0000	1.0000
L20	35	6" x 1" Flat Plate (G)	98.50 - 100.25	1.0000	1.0000
L20	50	4.5" x 1" Flat Plate (G)	98.50 - 100.25	1.0000	1.0000
L20	51	4.5" x 1" Flat Plate (G)	98.50 - 100.25	1.0000	1.0000
L20	52	4.5" x 1" Flat Plate (G)	99.00 - 100.25	1.0000	1.0000
L20	58	6" x 1" Flat Plate (G)	98.50 - 100.25	1.0000	1.0000
L20	59	6" x 1" Flat Plate (G)	98.50 - 100.25	1.0000	1.0000
L21	1	LDF7-50A(1-5/8")	98.25 - 98.50	1.0000	1.0000
L21	4	2" Rigid Conduit	98.25 - 98.50	1.0000	1.0000
L21	6	HB114-1-08U4-M5J(1-1/4")	98.25 - 98.50	1.0000	1.0000
L21	10	561(1-5/8")	98.25 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
			98.50		
L21	14	LDF4P-50A(1/2")	98.25 -	1.0000	1.0000
			98.50		
L21	33	6" x 1" Flat Plate (G)	98.25 -	1.0000	1.0000
			98.50		
L21	34	6" x 1" Flat Plate (G)	98.25 -	1.0000	1.0000
			98.50		
L21	35	6" x 1" Flat Plate (G)	98.25 -	1.0000	1.0000
			98.50		
L21	50	4.5" x 1" Flat Plate (G)	98.25 -	1.0000	1.0000
			98.50		
L21	51	4.5" x 1" Flat Plate (G)	98.25 -	1.0000	1.0000
			98.50		
L21	58	6" x 1" Flat Plate (G)	98.25 -	1.0000	1.0000
			98.50		
L21	59	6" x 1" Flat Plate (G)	98.25 -	1.0000	1.0000
			98.50		
L22	1	LDF7-50A(1-5/8")	93.25 -	1.0000	1.0000
			98.25		
L22	4	2" Rigid Conduit	93.25 -	1.0000	1.0000
			98.25		
L22	6	HB114-1-08U4-M5J(1-1/4")	93.25 -	1.0000	1.0000
			98.25		
L22	10	561(1-5/8")	93.25 -	1.0000	1.0000
			98.25		
L22	14	LDF4P-50A(1/2")	93.25 -	1.0000	1.0000
			98.25		
L22	33	6" x 1" Flat Plate (G)	93.25 -	1.0000	1.0000
			98.25		
L22	34	6" x 1" Flat Plate (G)	93.25 -	1.0000	1.0000
			98.25		
L22	35	6" x 1" Flat Plate (G)	93.25 -	1.0000	1.0000
			98.25		
L22	50	4.5" x 1" Flat Plate (G)	97.00 -	1.0000	1.0000
			98.25		
L22	51	4.5" x 1" Flat Plate (G)	97.00 -	1.0000	1.0000
			98.25		
L22	58	6" x 1" Flat Plate (G)	93.25 -	1.0000	1.0000
			98.25		
L22	59	6" x 1" Flat Plate (G)	93.25 -	1.0000	1.0000
			98.25		
L23	1	LDF7-50A(1-5/8")	90.50 -	1.0000	1.0000
			93.25		
L23	4	2" Rigid Conduit	90.50 -	1.0000	1.0000
			93.25		
L23	6	HB114-1-08U4-M5J(1-1/4")	90.50 -	1.0000	1.0000
			93.25		
L23	10	561(1-5/8")	90.50 -	1.0000	1.0000
			93.25		
L23	14	LDF4P-50A(1/2")	90.50 -	1.0000	1.0000
			93.25		
L23	33	6" x 1" Flat Plate (G)	90.50 -	1.0000	1.0000
			93.25		
L23	34	6" x 1" Flat Plate (G)	90.50 -	1.0000	1.0000
			93.25		
L23	35	6" x 1" Flat Plate (G)	90.50 -	1.0000	1.0000
			93.25		
L23	58	6" x 1" Flat Plate (G)	90.60 -	1.0000	1.0000
			93.25		
L23	59	6" x 1" Flat Plate (G)	90.60 -	1.0000	1.0000
			93.25		
L24	1	LDF7-50A(1-5/8")	90.25 -	1.0000	1.0000
			90.50		
L24	4	2" Rigid Conduit	90.25 -	1.0000	1.0000
			90.50		
L24	6	HB114-1-08U4-M5J(1-1/4")	90.25 -	1.0000	1.0000
			90.50		
L24	10	561(1-5/8")	90.25 -	1.0000	1.0000
			90.50		

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L24	14	LDF4P-50A(1/2")	90.25 - 90.50	1.0000	1.0000
L24	33	6" x 1" Flat Plate (G)	90.25 - 90.50	1.0000	1.0000
L24	34	6" x 1" Flat Plate (G)	90.25 - 90.50	1.0000	1.0000
L24	35	6" x 1" Flat Plate (G)	90.25 - 90.50	1.0000	1.0000
L24	56	8.5" x 1.25" Flat Plate (G)	90.25 - 90.50	1.0000	1.0000
L24	57	8.5" x 1.25" Flat Plate (G)	90.25 - 90.50	1.0000	1.0000
L25	1	LDF7-50A(1-5/8")	85.25 - 90.25	1.0000	1.0000
L25	4	2" Rigid Conduit	85.25 - 90.25	1.0000	1.0000
L25	6	HB114-1-08U4-M5J(1-1/4")	85.25 - 90.25	1.0000	1.0000
L25	10	561(1-5/8")	85.25 - 90.25	1.0000	1.0000
L25	14	LDF4P-50A(1/2")	85.25 - 90.25	1.0000	1.0000
L25	33	6" x 1" Flat Plate (G)	85.25 - 90.25	1.0000	1.0000
L25	34	6" x 1" Flat Plate (G)	85.25 - 90.25	1.0000	1.0000
L25	35	6" x 1" Flat Plate (G)	85.25 - 90.25	1.0000	1.0000
L25	43	6.5" x 1.25" Flat Plate (G)	85.25 - 85.50	1.0000	1.0000
L25	44	6.5" x 1.25" Flat Plate (G)	85.25 - 85.50	1.0000	1.0000
L25	45	6.5" x 1.25" Flat Plate (G)	85.25 - 85.50	1.0000	1.0000
L25	56	8.5" x 1.25" Flat Plate (G)	85.25 - 90.25	1.0000	1.0000
L25	57	8.5" x 1.25" Flat Plate (G)	85.25 - 90.25	1.0000	1.0000
L26	1	LDF7-50A(1-5/8")	83.50 - 85.25	1.0000	1.0000
L26	4	2" Rigid Conduit	83.50 - 85.25	1.0000	1.0000
L26	6	HB114-1-08U4-M5J(1-1/4")	83.50 - 85.25	1.0000	1.0000
L26	10	561(1-5/8")	83.50 - 85.25	1.0000	1.0000
L26	14	LDF4P-50A(1/2")	83.50 - 85.25	1.0000	1.0000
L26	33	6" x 1" Flat Plate (G)	83.50 - 85.25	1.0000	1.0000
L26	34	6" x 1" Flat Plate (G)	83.50 - 85.25	1.0000	1.0000
L26	35	6" x 1" Flat Plate (G)	83.50 - 85.25	1.0000	1.0000
L26	43	6.5" x 1.25" Flat Plate (G)	83.50 - 85.25	1.0000	1.0000
L26	44	6.5" x 1.25" Flat Plate (G)	83.50 - 85.25	1.0000	1.0000
L26	45	6.5" x 1.25" Flat Plate (G)	83.50 - 85.25	1.0000	1.0000
L26	49	8.5" x 1.25" Flat Plate (G)	83.50 - 85.00	1.0000	1.0000
L26	56	8.5" x 1.25" Flat Plate (G)	83.50 - 85.25	1.0000	1.0000
L26	57	8.5" x 1.25" Flat Plate (G)	83.50 - 85.25	1.0000	1.0000
L27	1	LDF7-50A(1-5/8")	83.25 - 83.50	1.0000	1.0000
L27	4	2" Rigid Conduit	83.25 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
			83.50		
L27	6	HB114-1-08U4-M5J(1-1/4")	83.25 -	1.0000	1.0000
L27	10	561(1-5/8")	83.50	1.0000	1.0000
L27	14	LDF4P-50A(1/2")	83.25 -	1.0000	1.0000
L27	33	6" x 1" Flat Plate (G)	83.50	1.0000	1.0000
L27	34	6" x 1" Flat Plate (G)	83.25 -	1.0000	1.0000
L27	35	6" x 1" Flat Plate (G)	83.50	1.0000	1.0000
L27	43	6.5" x 1.25" Flat Plate (G)	83.25 -	1.0000	1.0000
L27	44	6.5" x 1.25" Flat Plate (G)	83.50	1.0000	1.0000
L27	45	6.5" x 1.25" Flat Plate (G)	83.25 -	1.0000	1.0000
L27	49	8.5" x 1.25" Flat Plate (G)	83.50	1.0000	1.0000
L27	56	8.5" x 1.25" Flat Plate (G)	83.25 -	1.0000	1.0000
L27	57	8.5" x 1.25" Flat Plate (G)	83.50	1.0000	1.0000
L28	1	LDF7-50A(1-5/8")	80.75 -	1.0000	1.0000
L28	4	2" Rigid Conduit	83.25	1.0000	1.0000
L28	6	HB114-1-08U4-M5J(1-1/4")	80.75 -	1.0000	1.0000
L28	10	561(1-5/8")	83.25	1.0000	1.0000
L28	14	LDF4P-50A(1/2")	80.75 -	1.0000	1.0000
L28	33	6" x 1" Flat Plate (G)	83.25	1.0000	1.0000
L28	34	6" x 1" Flat Plate (G)	80.75 -	1.0000	1.0000
L28	35	6" x 1" Flat Plate (G)	83.25	1.0000	1.0000
L28	43	6.5" x 1.25" Flat Plate (G)	80.75 -	1.0000	1.0000
L28	44	6.5" x 1.25" Flat Plate (G)	83.25	1.0000	1.0000
L28	45	6.5" x 1.25" Flat Plate (G)	80.75 -	1.0000	1.0000
L28	49	8.5" x 1.25" Flat Plate (G)	83.25	1.0000	1.0000
L28	56	8.5" x 1.25" Flat Plate (G)	80.75 -	1.0000	1.0000
L28	57	8.5" x 1.25" Flat Plate (G)	83.25	1.0000	1.0000
L29	1	LDF7-50A(1-5/8")	80.50 -	1.0000	1.0000
L29	4	2" Rigid Conduit	80.75	1.0000	1.0000
L29	6	HB114-1-08U4-M5J(1-1/4")	80.50 -	1.0000	1.0000
L29	10	561(1-5/8")	80.75	1.0000	1.0000
L29	14	LDF4P-50A(1/2")	80.50 -	1.0000	1.0000
L29	33	6" x 1" Flat Plate (G)	80.75	1.0000	1.0000
L29	34	6" x 1" Flat Plate (G)	80.50 -	1.0000	1.0000
L29	35	6" x 1" Flat Plate (G)	80.75	1.0000	1.0000
			80.75		

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L29	43	6.5" x 1.25" Flat Plate (G)	80.50 - 80.75	1.0000	1.0000
L29	44	6.5" x 1.25" Flat Plate (G)	80.50 - 80.75	1.0000	1.0000
L29	45	6.5" x 1.25" Flat Plate (G)	80.50 - 80.75	1.0000	1.0000
L29	49	8.5" x 1.25" Flat Plate (G)	80.50 - 80.75	1.0000	1.0000
L29	56	8.5" x 1.25" Flat Plate (G)	80.50 - 80.75	1.0000	1.0000
L29	57	8.5" x 1.25" Flat Plate (G)	80.50 - 80.75	1.0000	1.0000
L30	1	LDF7-50A(1-5/8")	80.25 - 80.50	1.0000	1.0000
L30	4	2" Rigid Conduit	80.25 - 80.50	1.0000	1.0000
L30	6	HB114-1-08U4-M5J(1-1/4")	80.25 - 80.50	1.0000	1.0000
L30	10	561(1-5/8")	80.25 - 80.50	1.0000	1.0000
L30	14	LDF4P-50A(1/2")	80.25 - 80.50	1.0000	1.0000
L30	33	6" x 1" Flat Plate (G)	80.25 - 80.50	1.0000	1.0000
L30	34	6" x 1" Flat Plate (G)	80.25 - 80.50	1.0000	1.0000
L30	35	6" x 1" Flat Plate (G)	80.25 - 80.50	1.0000	1.0000
L30	43	6.5" x 1.25" Flat Plate (G)	80.25 - 80.50	1.0000	1.0000
L30	44	6.5" x 1.25" Flat Plate (G)	80.25 - 80.50	1.0000	1.0000
L30	45	6.5" x 1.25" Flat Plate (G)	80.25 - 80.50	1.0000	1.0000
L30	49	8.5" x 1.25" Flat Plate (G)	80.25 - 80.50	1.0000	1.0000
L30	56	8.5" x 1.25" Flat Plate (G)	80.25 - 80.50	1.0000	1.0000
L30	57	8.5" x 1.25" Flat Plate (G)	80.25 - 80.50	1.0000	1.0000
L31	1	LDF7-50A(1-5/8")	77.50 - 80.25	1.0000	1.0000
L31	4	2" Rigid Conduit	77.50 - 80.25	1.0000	1.0000
L31	6	HB114-1-08U4-M5J(1-1/4")	77.50 - 80.25	1.0000	1.0000
L31	10	561(1-5/8")	77.50 - 80.25	1.0000	1.0000
L31	14	LDF4P-50A(1/2")	77.50 - 80.25	1.0000	1.0000
L31	33	6" x 1" Flat Plate (G)	77.50 - 80.25	1.0000	1.0000
L31	34	6" x 1" Flat Plate (G)	77.50 - 80.25	1.0000	1.0000
L31	35	6" x 1" Flat Plate (G)	77.50 - 80.25	1.0000	1.0000
L31	43	6.5" x 1.25" Flat Plate (G)	77.50 - 80.25	1.0000	1.0000
L31	44	6.5" x 1.25" Flat Plate (G)	77.50 - 80.25	1.0000	1.0000
L31	45	6.5" x 1.25" Flat Plate (G)	77.50 - 80.25	1.0000	1.0000
L31	49	8.5" x 1.25" Flat Plate (G)	77.50 - 80.25	1.0000	1.0000
L31	56	8.5" x 1.25" Flat Plate (G)	77.50 - 80.25	1.0000	1.0000
L31	57	8.5" x 1.25" Flat Plate (G)	77.50 - 80.25	1.0000	1.0000
L32	1	LDF7-50A(1-5/8")	77.25 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
			77.50		
L32	4	2" Rigid Conduit	77.25 -	1.0000	1.0000
			77.50		
L32	6	HB114-1-08U4-M5J(1-1/4")	77.25 -	1.0000	1.0000
			77.50		
L32	10	561(1-5/8")	77.25 -	1.0000	1.0000
			77.50		
L32	14	LDF4P-50A(1/2")	77.25 -	1.0000	1.0000
			77.50		
L32	33	6" x 1" Flat Plate (G)	77.25 -	1.0000	1.0000
			77.50		
L32	34	6" x 1" Flat Plate (G)	77.25 -	1.0000	1.0000
			77.50		
L32	35	6" x 1" Flat Plate (G)	77.25 -	1.0000	1.0000
			77.50		
L32	43	6.5" x 1.25" Flat Plate (G)	77.25 -	1.0000	1.0000
			77.50		
L32	44	6.5" x 1.25" Flat Plate (G)	77.25 -	1.0000	1.0000
			77.50		
L32	45	6.5" x 1.25" Flat Plate (G)	77.25 -	1.0000	1.0000
			77.50		
L32	49	8.5" x 1.25" Flat Plate (G)	77.25 -	1.0000	1.0000
			77.50		
L32	56	8.5" x 1.25" Flat Plate (G)	77.25 -	1.0000	1.0000
			77.50		
L32	57	8.5" x 1.25" Flat Plate (G)	77.25 -	1.0000	1.0000
			77.50		
L33	1	LDF7-50A(1-5/8")	68.50 -	1.0000	1.0000
			77.25		
L33	4	2" Rigid Conduit	68.50 -	1.0000	1.0000
			77.25		
L33	6	HB114-1-08U4-M5J(1-1/4")	68.50 -	1.0000	1.0000
			77.25		
L33	10	561(1-5/8")	68.50 -	1.0000	1.0000
			77.25		
L33	14	LDF4P-50A(1/2")	68.50 -	1.0000	1.0000
			77.25		
L33	33	6" x 1" Flat Plate (G)	68.50 -	1.0000	1.0000
			77.25		
L33	34	6" x 1" Flat Plate (G)	68.50 -	1.0000	1.0000
			77.25		
L33	35	6" x 1" Flat Plate (G)	68.50 -	1.0000	1.0000
			77.25		
L33	43	6.5" x 1.25" Flat Plate (G)	72.50 -	1.0000	1.0000
			77.25		
L33	44	6.5" x 1.25" Flat Plate (G)	72.50 -	1.0000	1.0000
			77.25		
L33	45	6.5" x 1.25" Flat Plate (G)	72.50 -	1.0000	1.0000
			77.25		
L33	49	8.5" x 1.25" Flat Plate (G)	68.50 -	1.0000	1.0000
			77.25		
L33	56	8.5" x 1.25" Flat Plate (G)	68.50 -	1.0000	1.0000
			77.25		
L33	57	8.5" x 1.25" Flat Plate (G)	68.50 -	1.0000	1.0000
			77.25		
L35	1	LDF7-50A(1-5/8")	64.25 -	1.0000	1.0000
			68.00		
L35	4	2" Rigid Conduit	64.25 -	1.0000	1.0000
			68.00		
L35	6	HB114-1-08U4-M5J(1-1/4")	64.25 -	1.0000	1.0000
			68.00		
L35	10	561(1-5/8")	64.25 -	1.0000	1.0000
			68.00		
L35	14	LDF4P-50A(1/2")	64.25 -	1.0000	1.0000
			68.00		
L35	33	6" x 1" Flat Plate (G)	64.25 -	1.0000	1.0000
			68.00		
L35	34	6" x 1" Flat Plate (G)	64.25 -	1.0000	1.0000
			68.00		

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L35	35	6" x 1" Flat Plate (G)	64.25 - 68.00	1.0000	1.0000
L35	40	6.5" x 1.25" Flat Plate (G)	64.25 - 67.00	1.0000	1.0000
L35	41	6.5" x 1.25" Flat Plate (G)	64.25 - 67.00	1.0000	1.0000
L35	42	6.5" x 1.25" Flat Plate (G)	64.25 - 67.00	1.0000	1.0000
L35	49	8.5" x 1.25" Flat Plate (G)	64.25 - 68.00	1.0000	1.0000
L35	56	8.5" x 1.25" Flat Plate (G)	64.25 - 68.00	1.0000	1.0000
L35	57	8.5" x 1.25" Flat Plate (G)	64.25 - 68.00	1.0000	1.0000
L36	1	LDF7-50A(1-5/8")	64.00 - 64.25	1.0000	1.0000
L36	4	2" Rigid Conduit	64.00 - 64.25	1.0000	1.0000
L36	6	HB114-1-08U4-M5J(1-1/4")	64.00 - 64.25	1.0000	1.0000
L36	10	561(1-5/8")	64.00 - 64.25	1.0000	1.0000
L36	14	LDF4P-50A(1/2")	64.00 - 64.25	1.0000	1.0000
L36	33	6" x 1" Flat Plate (G)	64.00 - 64.25	1.0000	1.0000
L36	34	6" x 1" Flat Plate (G)	64.00 - 64.25	1.0000	1.0000
L36	35	6" x 1" Flat Plate (G)	64.00 - 64.25	1.0000	1.0000
L36	40	6.5" x 1.25" Flat Plate (G)	64.00 - 64.25	1.0000	1.0000
L36	41	6.5" x 1.25" Flat Plate (G)	64.00 - 64.25	1.0000	1.0000
L36	42	6.5" x 1.25" Flat Plate (G)	64.00 - 64.25	1.0000	1.0000
L36	49	8.5" x 1.25" Flat Plate (G)	64.00 - 64.25	1.0000	1.0000
L36	56	8.5" x 1.25" Flat Plate (G)	64.00 - 64.25	1.0000	1.0000
L36	57	8.5" x 1.25" Flat Plate (G)	64.00 - 64.25	1.0000	1.0000
L37	1	LDF7-50A(1-5/8")	60.50 - 64.00	1.0000	1.0000
L37	4	2" Rigid Conduit	60.50 - 64.00	1.0000	1.0000
L37	6	HB114-1-08U4-M5J(1-1/4")	60.50 - 64.00	1.0000	1.0000
L37	10	561(1-5/8")	60.50 - 64.00	1.0000	1.0000
L37	14	LDF4P-50A(1/2")	60.50 - 64.00	1.0000	1.0000
L37	25	Aero MP304	60.50 - 61.50	1.0000	1.0000
L37	33	6" x 1" Flat Plate (G)	60.50 - 64.00	1.0000	1.0000
L37	34	6" x 1" Flat Plate (G)	60.50 - 64.00	1.0000	1.0000
L37	35	6" x 1" Flat Plate (G)	60.50 - 64.00	1.0000	1.0000
L37	40	6.5" x 1.25" Flat Plate (G)	60.50 - 64.00	1.0000	1.0000
L37	41	6.5" x 1.25" Flat Plate (G)	60.50 - 64.00	1.0000	1.0000
L37	42	6.5" x 1.25" Flat Plate (G)	60.50 - 64.00	1.0000	1.0000
L37	49	8.5" x 1.25" Flat Plate (G)	60.50 - 64.00	1.0000	1.0000
L37	56	8.5" x 1.25" Flat Plate (G)	60.50 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L37	57	8.5" x 1.25" Flat Plate (G)	64.00 60.50 -	1.0000	1.0000
L38	1	LDF7-50A(1-5/8")	64.00 60.25 -	1.0000	1.0000
L38	4	2" Rigid Conduit	60.50 60.25 -	1.0000	1.0000
L38	6	HB114-1-08U4-M5J(1-1/4")	60.50 60.25 -	1.0000	1.0000
L38	10	561(1-5/8")	60.50 60.25 -	1.0000	1.0000
L38	14	LDF4P-50A(1/2")	60.50 60.25 -	1.0000	1.0000
L38	23	Aero MP304	60.50 60.25 -	1.0000	1.0000
L38	24	Aero MP304	60.50 60.25 -	1.0000	1.0000
L38	25	Aero MP304	60.50 60.25 -	1.0000	1.0000
L38	30	6.5" x 1.25" Flat Plate (G)	60.50 60.25 -	1.0000	1.0000
L38	31	6.5" x 1.25" Flat Plate (G)	60.50 60.25 -	1.0000	1.0000
L38	32	6.5" x 1.25" Flat Plate (G)	60.50 60.25 -	1.0000	1.0000
L38	40	6.5" x 1.25" Flat Plate (G)	60.50 60.25 -	1.0000	1.0000
L38	41	6.5" x 1.25" Flat Plate (G)	60.50 60.25 -	1.0000	1.0000
L38	42	6.5" x 1.25" Flat Plate (G)	60.50 60.25 -	1.0000	1.0000
L38	49	8.5" x 1.25" Flat Plate (G)	60.50 60.25 -	1.0000	1.0000
L38	56	8.5" x 1.25" Flat Plate (G)	60.50 60.25 -	1.0000	1.0000
L38	57	8.5" x 1.25" Flat Plate (G)	60.50 60.25 -	1.0000	1.0000
L39	1	LDF7-50A(1-5/8")	60.50 60.10 -	1.0000	1.0000
L39	4	2" Rigid Conduit	60.25 60.10 -	1.0000	1.0000
L39	6	HB114-1-08U4-M5J(1-1/4")	60.25 60.10 -	1.0000	1.0000
L39	10	561(1-5/8")	60.25 60.10 -	1.0000	1.0000
L39	14	LDF4P-50A(1/2")	60.25 60.10 -	1.0000	1.0000
L39	23	Aero MP304	60.25 60.10 -	1.0000	1.0000
L39	24	Aero MP304	60.25 60.10 -	1.0000	1.0000
L39	25	Aero MP304	60.25 60.10 -	1.0000	1.0000
L39	30	6.5" x 1.25" Flat Plate (G)	60.25 60.10 -	1.0000	1.0000
L39	31	6.5" x 1.25" Flat Plate (G)	60.25 60.10 -	1.0000	1.0000
L39	32	6.5" x 1.25" Flat Plate (G)	60.25 60.10 -	1.0000	1.0000
L39	40	6.5" x 1.25" Flat Plate (G)	60.25 60.10 -	1.0000	1.0000
L39	41	6.5" x 1.25" Flat Plate (G)	60.25 60.10 -	1.0000	1.0000
L39	42	6.5" x 1.25" Flat Plate (G)	60.25 60.10 -	1.0000	1.0000
L39	49	8.5" x 1.25" Flat Plate (G)	60.25 60.10 -	1.0000	1.0000
L39	56	8.5" x 1.25" Flat Plate (G)	60.25 60.10 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L39	57	8.5" x 1.25" Flat Plate (G)	60.10 - 60.25	1.0000	1.0000
L40	1	LDF7-50A(1-5/8")	59.85 - 60.10	1.0000	1.0000
L40	4	2" Rigid Conduit	59.85 - 60.10	1.0000	1.0000
L40	6	HB114-1-08U4-M5J(1-1/4")	59.85 - 60.10	1.0000	1.0000
L40	10	561(1-5/8")	59.85 - 60.10	1.0000	1.0000
L40	14	LDF4P-50A(1/2")	59.85 - 60.10	1.0000	1.0000
L40	23	Aero MP304	59.85 - 60.10	1.0000	1.0000
L40	24	Aero MP304	59.85 - 60.10	1.0000	1.0000
L40	25	Aero MP304	59.85 - 60.10	1.0000	1.0000
L40	30	6.5" x 1.25" Flat Plate (G)	59.85 - 60.10	1.0000	1.0000
L40	31	6.5" x 1.25" Flat Plate (G)	59.85 - 60.10	1.0000	1.0000
L40	32	6.5" x 1.25" Flat Plate (G)	59.85 - 60.10	1.0000	1.0000
L40	40	6.5" x 1.25" Flat Plate (G)	59.85 - 60.10	1.0000	1.0000
L40	41	6.5" x 1.25" Flat Plate (G)	59.85 - 60.10	1.0000	1.0000
L40	42	6.5" x 1.25" Flat Plate (G)	59.85 - 60.10	1.0000	1.0000
L40	49	8.5" x 1.25" Flat Plate (G)	60.00 - 60.10	1.0000	1.0000
L40	56	8.5" x 1.25" Flat Plate (G)	59.85 - 60.10	1.0000	1.0000
L40	57	8.5" x 1.25" Flat Plate (G)	59.85 - 60.10	1.0000	1.0000
L41	1	LDF7-50A(1-5/8")	59.10 - 59.85	1.0000	1.0000
L41	4	2" Rigid Conduit	59.10 - 59.85	1.0000	1.0000
L41	6	HB114-1-08U4-M5J(1-1/4")	59.10 - 59.85	1.0000	1.0000
L41	10	561(1-5/8")	59.10 - 59.85	1.0000	1.0000
L41	14	LDF4P-50A(1/2")	59.10 - 59.85	1.0000	1.0000
L41	23	Aero MP304	59.10 - 59.85	1.0000	1.0000
L41	24	Aero MP304	59.10 - 59.85	1.0000	1.0000
L41	25	Aero MP304	59.10 - 59.85	1.0000	1.0000
L41	30	6.5" x 1.25" Flat Plate (G)	59.10 - 59.85	1.0000	1.0000
L41	31	6.5" x 1.25" Flat Plate (G)	59.10 - 59.85	1.0000	1.0000
L41	32	6.5" x 1.25" Flat Plate (G)	59.10 - 59.85	1.0000	1.0000
L41	40	6.5" x 1.25" Flat Plate (G)	59.10 - 59.85	1.0000	1.0000
L41	41	6.5" x 1.25" Flat Plate (G)	59.10 - 59.85	1.0000	1.0000
L41	42	6.5" x 1.25" Flat Plate (G)	59.10 - 59.85	1.0000	1.0000
L41	56	8.5" x 1.25" Flat Plate (G)	59.10 - 59.85	1.0000	1.0000
L41	57	8.5" x 1.25" Flat Plate (G)	59.10 - 59.85	1.0000	1.0000
L42	1	LDF7-50A(1-5/8")	58.85 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L42	4	2" Rigid Conduit	59.10 58.85 -	1.0000	1.0000
L42	6	HB114-1-08U4-M5J(1-1/4")	59.10 58.85 -	1.0000	1.0000
L42	10	561(1-5/8")	59.10 58.85 -	1.0000	1.0000
L42	14	LDF4P-50A(1/2")	59.10 58.85 -	1.0000	1.0000
L42	23	Aero MP304	59.10 58.85 -	1.0000	1.0000
L42	24	Aero MP304	59.10 58.85 -	1.0000	1.0000
L42	25	Aero MP304	59.10 58.85 -	1.0000	1.0000
L42	30	6.5" x 1.25" Flat Plate (G)	59.10 58.85 -	1.0000	1.0000
L42	31	6.5" x 1.25" Flat Plate (G)	59.10 58.85 -	1.0000	1.0000
L42	32	6.5" x 1.25" Flat Plate (G)	59.10 58.85 -	1.0000	1.0000
L42	40	6.5" x 1.25" Flat Plate (G)	59.10 58.85 -	1.0000	1.0000
L42	41	6.5" x 1.25" Flat Plate (G)	59.10 58.85 -	1.0000	1.0000
L42	42	6.5" x 1.25" Flat Plate (G)	59.10 58.85 -	1.0000	1.0000
L42	56	8.5" x 1.25" Flat Plate (G)	59.10 58.85 -	1.0000	1.0000
L42	57	8.5" x 1.25" Flat Plate (G)	59.10 58.85 -	1.0000	1.0000
L43	1	LDF7-50A(1-5/8")	55.40 - 58.85	1.0000	1.0000
L43	4	2" Rigid Conduit	55.40 - 58.85	1.0000	1.0000
L43	6	HB114-1-08U4-M5J(1-1/4")	55.40 - 58.85	1.0000	1.0000
L43	10	561(1-5/8")	55.40 - 58.85	1.0000	1.0000
L43	14	LDF4P-50A(1/2")	55.40 - 58.85	1.0000	1.0000
L43	23	Aero MP304	55.40 - 58.85	1.0000	1.0000
L43	24	Aero MP304	55.40 - 58.85	1.0000	1.0000
L43	25	Aero MP304	55.40 - 58.85	1.0000	1.0000
L43	30	6.5" x 1.25" Flat Plate (G)	55.40 - 58.85	1.0000	1.0000
L43	31	6.5" x 1.25" Flat Plate (G)	55.40 - 58.85	1.0000	1.0000
L43	32	6.5" x 1.25" Flat Plate (G)	55.40 - 58.85	1.0000	1.0000
L43	40	6.5" x 1.25" Flat Plate (G)	55.40 - 58.85	1.0000	1.0000
L43	41	6.5" x 1.25" Flat Plate (G)	55.40 - 58.85	1.0000	1.0000
L43	42	6.5" x 1.25" Flat Plate (G)	55.40 - 58.85	1.0000	1.0000
L43	56	8.5" x 1.25" Flat Plate (G)	55.50 - 58.85	1.0000	1.0000
L43	57	8.5" x 1.25" Flat Plate (G)	55.50 - 58.85	1.0000	1.0000
L44	1	LDF7-50A(1-5/8")	55.15 - 55.40	1.0000	1.0000
L44	4	2" Rigid Conduit	55.15 - 55.40	1.0000	1.0000
L44	6	HB114-1-08U4-M5J(1-1/4")	55.15 - 55.40	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L44	10	561(1-5/8")	55.15 - 55.40	1.0000	1.0000
L44	14	LDF4P-50A(1/2")	55.15 - 55.40	1.0000	1.0000
L44	23	Aero MP304	55.15 - 55.40	1.0000	1.0000
L44	24	Aero MP304	55.15 - 55.40	1.0000	1.0000
L44	25	Aero MP304	55.15 - 55.40	1.0000	1.0000
L44	30	6.5" x 1.25" Flat Plate (G)	55.15 - 55.40	1.0000	1.0000
L44	31	6.5" x 1.25" Flat Plate (G)	55.15 - 55.40	1.0000	1.0000
L44	32	6.5" x 1.25" Flat Plate (G)	55.15 - 55.40	1.0000	1.0000
L44	40	6.5" x 1.25" Flat Plate (G)	55.15 - 55.40	1.0000	1.0000
L44	41	6.5" x 1.25" Flat Plate (G)	55.15 - 55.40	1.0000	1.0000
L44	42	6.5" x 1.25" Flat Plate (G)	55.15 - 55.40	1.0000	1.0000
L44	54	8.5" x 1.25" Flat Plate (G)	55.15 - 55.40	1.0000	1.0000
L44	55	8.5" x 1.25" Flat Plate (G)	55.15 - 55.40	1.0000	1.0000
L45	1	LDF7-50A(1-5/8")	54.75 - 55.15	1.0000	1.0000
L45	4	2" Rigid Conduit	54.75 - 55.15	1.0000	1.0000
L45	6	HB114-1-08U4-M5J(1-1/4")	54.75 - 55.15	1.0000	1.0000
L45	10	561(1-5/8")	54.75 - 55.15	1.0000	1.0000
L45	14	LDF4P-50A(1/2")	54.75 - 55.15	1.0000	1.0000
L45	23	Aero MP304	54.75 - 55.15	1.0000	1.0000
L45	24	Aero MP304	54.75 - 55.15	1.0000	1.0000
L45	25	Aero MP304	54.75 - 55.15	1.0000	1.0000
L45	30	6.5" x 1.25" Flat Plate (G)	54.75 - 55.15	1.0000	1.0000
L45	31	6.5" x 1.25" Flat Plate (G)	54.75 - 55.15	1.0000	1.0000
L45	32	6.5" x 1.25" Flat Plate (G)	54.75 - 55.15	1.0000	1.0000
L45	40	6.5" x 1.25" Flat Plate (G)	54.75 - 55.15	1.0000	1.0000
L45	41	6.5" x 1.25" Flat Plate (G)	54.75 - 55.15	1.0000	1.0000
L45	42	6.5" x 1.25" Flat Plate (G)	54.75 - 55.15	1.0000	1.0000
L45	54	8.5" x 1.25" Flat Plate (G)	54.75 - 55.15	1.0000	1.0000
L45	55	8.5" x 1.25" Flat Plate (G)	54.75 - 55.15	1.0000	1.0000
L46	1	LDF7-50A(1-5/8")	54.50 - 54.75	1.0000	1.0000
L46	4	2" Rigid Conduit	54.50 - 54.75	1.0000	1.0000
L46	6	HB114-1-08U4-M5J(1-1/4")	54.50 - 54.75	1.0000	1.0000
L46	10	561(1-5/8")	54.50 - 54.75	1.0000	1.0000
L46	14	LDF4P-50A(1/2")	54.50 - 54.75	1.0000	1.0000
L46	23	Aero MP304	54.50 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L46	24	Aero MP304	54.75 54.50 -	1.0000	1.0000
L46	25	Aero MP304	54.75 54.50 -	1.0000	1.0000
L46	30	6.5" x 1.25" Flat Plate (G)	54.75 54.50 -	1.0000	1.0000
L46	31	6.5" x 1.25" Flat Plate (G)	54.75 54.50 -	1.0000	1.0000
L46	32	6.5" x 1.25" Flat Plate (G)	54.75 54.50 -	1.0000	1.0000
L46	40	6.5" x 1.25" Flat Plate (G)	54.75 54.50 -	1.0000	1.0000
L46	41	6.5" x 1.25" Flat Plate (G)	54.75 54.50 -	1.0000	1.0000
L46	42	6.5" x 1.25" Flat Plate (G)	54.75 54.50 -	1.0000	1.0000
L46	54	8.5" x 1.25" Flat Plate (G)	54.75 54.50 -	1.0000	1.0000
L46	55	8.5" x 1.25" Flat Plate (G)	54.75 54.50 -	1.0000	1.0000
L47	1	LDF7-50A(1-5/8")	49.50 - 54.50	1.0000	1.0000
L47	4	2" Rigid Conduit	49.50 - 54.50	1.0000	1.0000
L47	6	HB114-1-08U4-M5J(1-1/4")	49.50 - 54.50	1.0000	1.0000
L47	10	561(1-5/8")	49.50 - 54.50	1.0000	1.0000
L47	14	LDF4P-50A(1/2")	49.50 - 54.50	1.0000	1.0000
L47	23	Aero MP304	49.50 - 54.50	1.0000	1.0000
L47	24	Aero MP304	49.50 - 54.50	1.0000	1.0000
L47	25	Aero MP304	49.50 - 54.50	1.0000	1.0000
L47	30	6.5" x 1.25" Flat Plate (G)	49.50 - 54.50	1.0000	1.0000
L47	31	6.5" x 1.25" Flat Plate (G)	49.50 - 54.50	1.0000	1.0000
L47	32	6.5" x 1.25" Flat Plate (G)	49.50 - 54.50	1.0000	1.0000
L47	40	6.5" x 1.25" Flat Plate (G)	52.00 - 54.50	1.0000	1.0000
L47	41	6.5" x 1.25" Flat Plate (G)	52.00 - 54.50	1.0000	1.0000
L47	42	6.5" x 1.25" Flat Plate (G)	52.00 - 54.50	1.0000	1.0000
L47	54	8.5" x 1.25" Flat Plate (G)	49.50 - 54.50	1.0000	1.0000
L47	55	8.5" x 1.25" Flat Plate (G)	49.50 - 54.50	1.0000	1.0000
L48	1	LDF7-50A(1-5/8")	44.50 - 49.50	1.0000	1.0000
L48	4	2" Rigid Conduit	44.50 - 49.50	1.0000	1.0000
L48	6	HB114-1-08U4-M5J(1-1/4")	44.50 - 49.50	1.0000	1.0000
L48	10	561(1-5/8")	44.50 - 49.50	1.0000	1.0000
L48	14	LDF4P-50A(1/2")	44.50 - 49.50	1.0000	1.0000
L48	23	Aero MP304	44.50 - 49.50	1.0000	1.0000
L48	24	Aero MP304	44.50 - 49.50	1.0000	1.0000
L48	25	Aero MP304	44.50 - 49.50	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L48	30	6.5" x 1.25" Flat Plate (G)	44.50 - 49.50	1.0000	1.0000
L48	31	6.5" x 1.25" Flat Plate (G)	44.50 - 49.50	1.0000	1.0000
L48	32	6.5" x 1.25" Flat Plate (G)	44.50 - 49.50	1.0000	1.0000
L48	48	8.5" x 1.25" Flat Plate (G)	44.50 - 45.50	1.0000	1.0000
L48	54	8.5" x 1.25" Flat Plate (G)	44.50 - 49.50	1.0000	1.0000
L48	55	8.5" x 1.25" Flat Plate (G)	44.50 - 49.50	1.0000	1.0000
L49	1	LDF7-50A(1-5/8")	41.30 - 44.50	1.0000	1.0000
L49	4	2" Rigid Conduit	41.30 - 44.50	1.0000	1.0000
L49	6	HB114-1-08U4-M5J(1-1/4")	41.30 - 44.50	1.0000	1.0000
L49	10	561(1-5/8")	41.30 - 44.50	1.0000	1.0000
L49	14	LDF4P-50A(1/2")	41.30 - 44.50	1.0000	1.0000
L49	23	Aero MP304	41.30 - 44.50	1.0000	1.0000
L49	24	Aero MP304	41.30 - 44.50	1.0000	1.0000
L49	25	Aero MP304	41.30 - 44.50	1.0000	1.0000
L49	30	6.5" x 1.25" Flat Plate (G)	41.30 - 44.50	1.0000	1.0000
L49	31	6.5" x 1.25" Flat Plate (G)	41.30 - 44.50	1.0000	1.0000
L49	32	6.5" x 1.25" Flat Plate (G)	41.30 - 44.50	1.0000	1.0000
L49	48	8.5" x 1.25" Flat Plate (G)	41.30 - 44.50	1.0000	1.0000
L49	54	8.5" x 1.25" Flat Plate (G)	41.30 - 44.50	1.0000	1.0000
L49	55	8.5" x 1.25" Flat Plate (G)	41.30 - 44.50	1.0000	1.0000
L50	1	LDF7-50A(1-5/8")	41.05 - 41.30	1.0000	1.0000
L50	4	2" Rigid Conduit	41.05 - 41.30	1.0000	1.0000
L50	6	HB114-1-08U4-M5J(1-1/4")	41.05 - 41.30	1.0000	1.0000
L50	10	561(1-5/8")	41.05 - 41.30	1.0000	1.0000
L50	14	LDF4P-50A(1/2")	41.05 - 41.30	1.0000	1.0000
L50	23	Aero MP304	41.05 - 41.30	1.0000	1.0000
L50	24	Aero MP304	41.05 - 41.30	1.0000	1.0000
L50	25	Aero MP304	41.05 - 41.30	1.0000	1.0000
L50	30	6.5" x 1.25" Flat Plate (G)	41.05 - 41.30	1.0000	1.0000
L50	31	6.5" x 1.25" Flat Plate (G)	41.05 - 41.30	1.0000	1.0000
L50	32	6.5" x 1.25" Flat Plate (G)	41.05 - 41.30	1.0000	1.0000
L50	48	8.5" x 1.25" Flat Plate (G)	41.05 - 41.30	1.0000	1.0000
L50	54	8.5" x 1.25" Flat Plate (G)	41.05 - 41.30	1.0000	1.0000
L50	55	8.5" x 1.25" Flat Plate (G)	41.05 - 41.30	1.0000	1.0000
L51	1	LDF7-50A(1-5/8")	34.00 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L51	4	2" Rigid Conduit	41.05 34.00 -	1.0000	1.0000
L51	6	HB114-1-08U4-M5J(1-1/4")	41.05 34.00 -	1.0000	1.0000
L51	10	561(1-5/8")	41.05 34.00 -	1.0000	1.0000
L51	14	LDF4P-50A(1/2")	41.05 34.00 -	1.0000	1.0000
L51	23	Aero MP304	41.05 34.00 -	1.0000	1.0000
L51	24	Aero MP304	41.05 34.00 -	1.0000	1.0000
L51	25	Aero MP304	41.05 34.00 -	1.0000	1.0000
L51	30	6.5" x 1.25" Flat Plate (G)	41.05 34.00 -	1.0000	1.0000
L51	31	6.5" x 1.25" Flat Plate (G)	41.05 34.00 -	1.0000	1.0000
L51	32	6.5" x 1.25" Flat Plate (G)	41.05 34.00 -	1.0000	1.0000
L51	37	6.5" x 1.25" Flat Plate (G)	41.05 34.00 -	1.0000	1.0000
L51	38	6.5" x 1.25" Flat Plate (G)	38.00 34.00 -	1.0000	1.0000
L51	39	6.5" x 1.25" Flat Plate (G)	38.00 34.00 -	1.0000	1.0000
L51	48	8.5" x 1.25" Flat Plate (G)	38.00 34.00 -	1.0000	1.0000
L51	54	8.5" x 1.25" Flat Plate (G)	41.05 34.00 -	1.0000	1.0000
L51	55	8.5" x 1.25" Flat Plate (G)	41.05 34.00 -	1.0000	1.0000
L53	1	LDF7-50A(1-5/8")	41.05 31.50 -	1.0000	1.0000
L53	4	2" Rigid Conduit	33.00 31.50 -	1.0000	1.0000
L53	6	HB114-1-08U4-M5J(1-1/4")	33.00 31.50 -	1.0000	1.0000
L53	10	561(1-5/8")	33.00 31.50 -	1.0000	1.0000
L53	14	LDF4P-50A(1/2")	33.00 31.50 -	1.0000	1.0000
L53	23	Aero MP304	33.00 31.50 -	1.0000	1.0000
L53	24	Aero MP304	33.00 31.50 -	1.0000	1.0000
L53	25	Aero MP304	33.00 31.50 -	1.0000	1.0000
L53	30	6.5" x 1.25" Flat Plate (G)	33.00 31.50 -	1.0000	1.0000
L53	31	6.5" x 1.25" Flat Plate (G)	33.00 31.50 -	1.0000	1.0000
L53	32	6.5" x 1.25" Flat Plate (G)	33.00 31.50 -	1.0000	1.0000
L53	37	6.5" x 1.25" Flat Plate (G)	33.00 31.50 -	1.0000	1.0000
L53	38	6.5" x 1.25" Flat Plate (G)	33.00 31.50 -	1.0000	1.0000
L53	39	6.5" x 1.25" Flat Plate (G)	33.00 31.50 -	1.0000	1.0000
L53	48	8.5" x 1.25" Flat Plate (G)	33.00 31.50 -	1.0000	1.0000
L53	54	8.5" x 1.25" Flat Plate (G)	33.00 31.50 -	1.0000	1.0000
L53	55	8.5" x 1.25" Flat Plate (G)	33.00 31.50 -	1.0000	1.0000
L54	1	LDF7-50A(1-5/8")	31.25 - 31.50	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L54	4	2" Rigid Conduit	31.25 - 31.50	1.0000	1.0000
L54	6	HB114-1-08U4-M5J(1-1/4")	31.25 - 31.50	1.0000	1.0000
L54	10	561(1-5/8")	31.25 - 31.50	1.0000	1.0000
L54	14	LDF4P-50A(1/2")	31.25 - 31.50	1.0000	1.0000
L54	18	Aero MP305	31.25 - 31.50	1.0000	1.0000
L54	23	Aero MP304	31.25 - 31.50	1.0000	1.0000
L54	24	Aero MP304	31.25 - 31.50	1.0000	1.0000
L54	25	Aero MP304	31.25 - 31.50	1.0000	1.0000
L54	30	6.5" x 1.25" Flat Plate (G)	31.25 - 31.50	1.0000	1.0000
L54	31	6.5" x 1.25" Flat Plate (G)	31.25 - 31.50	1.0000	1.0000
L54	32	6.5" x 1.25" Flat Plate (G)	31.25 - 31.50	1.0000	1.0000
L54	37	6.5" x 1.25" Flat Plate (G)	31.25 - 31.50	1.0000	1.0000
L54	38	6.5" x 1.25" Flat Plate (G)	31.25 - 31.50	1.0000	1.0000
L54	39	6.5" x 1.25" Flat Plate (G)	31.25 - 31.50	1.0000	1.0000
L54	48	8.5" x 1.25" Flat Plate (G)	31.25 - 31.50	1.0000	1.0000
L54	54	8.5" x 1.25" Flat Plate (G)	31.25 - 31.50	1.0000	1.0000
L54	55	8.5" x 1.25" Flat Plate (G)	31.25 - 31.50	1.0000	1.0000
L55	1	LDF7-50A(1-5/8")	30.50 - 31.25	1.0000	1.0000
L55	4	2" Rigid Conduit	30.50 - 31.25	1.0000	1.0000
L55	6	HB114-1-08U4-M5J(1-1/4")	30.50 - 31.25	1.0000	1.0000
L55	10	561(1-5/8")	30.50 - 31.25	1.0000	1.0000
L55	14	LDF4P-50A(1/2")	30.50 - 31.25	1.0000	1.0000
L55	18	Aero MP305	30.50 - 31.25	1.0000	1.0000
L55	23	Aero MP304	30.50 - 31.25	1.0000	1.0000
L55	24	Aero MP304	30.50 - 31.25	1.0000	1.0000
L55	25	Aero MP304	31.00 - 31.25	1.0000	1.0000
L55	30	6.5" x 1.25" Flat Plate (G)	30.50 - 31.25	1.0000	1.0000
L55	31	6.5" x 1.25" Flat Plate (G)	30.50 - 31.25	1.0000	1.0000
L55	32	6.5" x 1.25" Flat Plate (G)	30.50 - 31.25	1.0000	1.0000
L55	37	6.5" x 1.25" Flat Plate (G)	30.50 - 31.25	1.0000	1.0000
L55	38	6.5" x 1.25" Flat Plate (G)	30.50 - 31.25	1.0000	1.0000
L55	39	6.5" x 1.25" Flat Plate (G)	30.50 - 31.25	1.0000	1.0000
L55	48	8.5" x 1.25" Flat Plate (G)	30.50 - 31.25	1.0000	1.0000
L55	54	8.5" x 1.25" Flat Plate (G)	30.50 - 31.25	1.0000	1.0000
L55	55	8.5" x 1.25" Flat Plate (G)	30.50 - 31.25	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L56	1	LDF7-50A(1-5/8")	31.25 - 30.25	1.0000	1.0000
L56	4	2" Rigid Conduit	30.25 - 30.50	1.0000	1.0000
L56	6	HB114-1-08U4-M5J(1-1/4")	30.25 - 30.50	1.0000	1.0000
L56	10	561(1-5/8")	30.25 - 30.50	1.0000	1.0000
L56	14	LDF4P-50A(1/2")	30.25 - 30.50	1.0000	1.0000
L56	18	Aero MP305	30.25 - 30.50	1.0000	1.0000
L56	19	Aero MP305	30.25 - 30.50	1.0000	1.0000
L56	20	Aero MP305	30.25 - 30.50	1.0000	1.0000
L56	27	6" x 1" Flat Plate (G)	30.25 - 30.50	1.0000	1.0000
L56	28	6" x 1" Flat Plate (G)	30.25 - 30.50	1.0000	1.0000
L56	29	6" x 1" Flat Plate (G)	30.25 - 30.50	1.0000	1.0000
L56	37	6.5" x 1.25" Flat Plate (G)	30.25 - 30.50	1.0000	1.0000
L56	38	6.5" x 1.25" Flat Plate (G)	30.25 - 30.50	1.0000	1.0000
L56	39	6.5" x 1.25" Flat Plate (G)	30.25 - 30.50	1.0000	1.0000
L56	48	8.5" x 1.25" Flat Plate (G)	30.25 - 30.50	1.0000	1.0000
L56	54	8.5" x 1.25" Flat Plate (G)	30.25 - 30.50	1.0000	1.0000
L56	55	8.5" x 1.25" Flat Plate (G)	30.25 - 30.50	1.0000	1.0000
L57	1	LDF7-50A(1-5/8")	25.75 - 30.25	1.0000	1.0000
L57	4	2" Rigid Conduit	25.75 - 30.25	1.0000	1.0000
L57	6	HB114-1-08U4-M5J(1-1/4")	25.75 - 30.25	1.0000	1.0000
L57	10	561(1-5/8")	25.75 - 30.25	1.0000	1.0000
L57	14	LDF4P-50A(1/2")	25.75 - 30.25	1.0000	1.0000
L57	18	Aero MP305	25.75 - 30.25	1.0000	1.0000
L57	19	Aero MP305	25.75 - 30.25	1.0000	1.0000
L57	20	Aero MP305	25.75 - 30.25	1.0000	1.0000
L57	27	6" x 1" Flat Plate (G)	25.75 - 30.25	1.0000	1.0000
L57	28	6" x 1" Flat Plate (G)	25.75 - 30.25	1.0000	1.0000
L57	29	6" x 1" Flat Plate (G)	25.75 - 30.25	1.0000	1.0000
L57	37	6.5" x 1.25" Flat Plate (G)	25.75 - 30.25	1.0000	1.0000
L57	38	6.5" x 1.25" Flat Plate (G)	25.75 - 30.25	1.0000	1.0000
L57	39	6.5" x 1.25" Flat Plate (G)	25.75 - 30.25	1.0000	1.0000
L57	48	8.5" x 1.25" Flat Plate (G)	25.75 - 30.25	1.0000	1.0000
L57	54	8.5" x 1.25" Flat Plate (G)	25.75 - 30.25	1.0000	1.0000
L57	55	8.5" x 1.25" Flat Plate (G)	25.75 - 30.25	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L58	1	LDF7-50A(1-5/8")	25.50 - 25.75	1.0000	1.0000
L58	4	2" Rigid Conduit	25.50 - 25.75	1.0000	1.0000
L58	6	HB114-1-08U4-M5J(1-1/4")	25.50 - 25.75	1.0000	1.0000
L58	10	561(1-5/8")	25.50 - 25.75	1.0000	1.0000
L58	14	LDF4P-50A(1/2")	25.50 - 25.75	1.0000	1.0000
L58	18	Aero MP305	25.50 - 25.75	1.0000	1.0000
L58	19	Aero MP305	25.50 - 25.75	1.0000	1.0000
L58	20	Aero MP305	25.50 - 25.75	1.0000	1.0000
L58	27	6" x 1" Flat Plate (G)	25.50 - 25.75	1.0000	1.0000
L58	28	6" x 1" Flat Plate (G)	25.50 - 25.75	1.0000	1.0000
L58	29	6" x 1" Flat Plate (G)	25.50 - 25.75	1.0000	1.0000
L58	37	6.5" x 1.25" Flat Plate (G)	25.50 - 25.75	1.0000	1.0000
L58	38	6.5" x 1.25" Flat Plate (G)	25.50 - 25.75	1.0000	1.0000
L58	39	6.5" x 1.25" Flat Plate (G)	25.50 - 25.75	1.0000	1.0000
L58	48	8.5" x 1.25" Flat Plate (G)	25.50 - 25.75	1.0000	1.0000
L58	54	8.5" x 1.25" Flat Plate (G)	25.50 - 25.75	1.0000	1.0000
L58	55	8.5" x 1.25" Flat Plate (G)	25.50 - 25.75	1.0000	1.0000
L59	1	LDF7-50A(1-5/8")	24.70 - 25.50	1.0000	1.0000
L59	4	2" Rigid Conduit	24.70 - 25.50	1.0000	1.0000
L59	6	HB114-1-08U4-M5J(1-1/4")	24.70 - 25.50	1.0000	1.0000
L59	10	561(1-5/8")	24.70 - 25.50	1.0000	1.0000
L59	14	LDF4P-50A(1/2")	24.70 - 25.50	1.0000	1.0000
L59	18	Aero MP305	24.70 - 25.50	1.0000	1.0000
L59	19	Aero MP305	24.70 - 25.50	1.0000	1.0000
L59	20	Aero MP305	24.70 - 25.50	1.0000	1.0000
L59	27	6" x 1" Flat Plate (G)	24.70 - 25.50	1.0000	1.0000
L59	28	6" x 1" Flat Plate (G)	24.70 - 25.50	1.0000	1.0000
L59	29	6" x 1" Flat Plate (G)	24.70 - 25.50	1.0000	1.0000
L59	37	6.5" x 1.25" Flat Plate (G)	24.70 - 25.50	1.0000	1.0000
L59	38	6.5" x 1.25" Flat Plate (G)	24.70 - 25.50	1.0000	1.0000
L59	39	6.5" x 1.25" Flat Plate (G)	24.70 - 25.50	1.0000	1.0000
L59	48	8.5" x 1.25" Flat Plate (G)	24.70 - 25.50	1.0000	1.0000
L59	54	8.5" x 1.25" Flat Plate (G)	24.70 - 25.50	1.0000	1.0000
L59	55	8.5" x 1.25" Flat Plate (G)	24.70 - 25.50	1.0000	1.0000
L60	1	LDF7-50A(1-5/8")	24.45 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L60	4	2" Rigid Conduit	24.70 24.45 - 24.70	1.0000	1.0000
L60	6	HB114-1-08U4-M5J(1-1/4")	24.45 - 24.70	1.0000	1.0000
L60	10	561(1-5/8")	24.45 - 24.70	1.0000	1.0000
L60	14	LDF4P-50A(1/2")	24.45 - 24.70	1.0000	1.0000
L60	18	Aero MP305	24.45 - 24.70	1.0000	1.0000
L60	19	Aero MP305	24.45 - 24.70	1.0000	1.0000
L60	20	Aero MP305	24.45 - 24.70	1.0000	1.0000
L60	27	6" x 1" Flat Plate (G)	24.45 - 24.70	1.0000	1.0000
L60	28	6" x 1" Flat Plate (G)	24.45 - 24.70	1.0000	1.0000
L60	29	6" x 1" Flat Plate (G)	24.45 - 24.70	1.0000	1.0000
L60	37	6.5" x 1.25" Flat Plate (G)	24.45 - 24.70	1.0000	1.0000
L60	38	6.5" x 1.25" Flat Plate (G)	24.45 - 24.70	1.0000	1.0000
L60	39	6.5" x 1.25" Flat Plate (G)	24.45 - 24.70	1.0000	1.0000
L60	48	8.5" x 1.25" Flat Plate (G)	24.45 - 24.70	1.0000	1.0000
L60	54	8.5" x 1.25" Flat Plate (G)	24.45 - 24.70	1.0000	1.0000
L60	55	8.5" x 1.25" Flat Plate (G)	24.45 - 24.70	1.0000	1.0000
L61	1	LDF7-50A(1-5/8")	24.00 - 24.45	1.0000	1.0000
L61	4	2" Rigid Conduit	24.00 - 24.45	1.0000	1.0000
L61	6	HB114-1-08U4-M5J(1-1/4")	24.00 - 24.45	1.0000	1.0000
L61	10	561(1-5/8")	24.00 - 24.45	1.0000	1.0000
L61	14	LDF4P-50A(1/2")	24.00 - 24.45	1.0000	1.0000
L61	18	Aero MP305	24.00 - 24.45	1.0000	1.0000
L61	19	Aero MP305	24.00 - 24.45	1.0000	1.0000
L61	20	Aero MP305	24.00 - 24.45	1.0000	1.0000
L61	27	6" x 1" Flat Plate (G)	24.00 - 24.45	1.0000	1.0000
L61	28	6" x 1" Flat Plate (G)	24.00 - 24.45	1.0000	1.0000
L61	29	6" x 1" Flat Plate (G)	24.00 - 24.45	1.0000	1.0000
L61	37	6.5" x 1.25" Flat Plate (G)	24.00 - 24.45	1.0000	1.0000
L61	38	6.5" x 1.25" Flat Plate (G)	24.00 - 24.45	1.0000	1.0000
L61	39	6.5" x 1.25" Flat Plate (G)	24.00 - 24.45	1.0000	1.0000
L61	48	8.5" x 1.25" Flat Plate (G)	24.00 - 24.45	1.0000	1.0000
L61	54	8.5" x 1.25" Flat Plate (G)	24.00 - 24.45	1.0000	1.0000
L61	55	8.5" x 1.25" Flat Plate (G)	24.00 - 24.45	1.0000	1.0000
L62	1	LDF7-50A(1-5/8")	23.75 - 24.00	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L62	4	2" Rigid Conduit	23.75 - 24.00	1.0000	1.0000
L62	6	HB114-1-08U4-M5J(1-1/4")	23.75 - 24.00	1.0000	1.0000
L62	10	561(1-5/8")	23.75 - 24.00	1.0000	1.0000
L62	14	LDF4P-50A(1/2")	23.75 - 24.00	1.0000	1.0000
L62	18	Aero MP305	23.75 - 24.00	1.0000	1.0000
L62	19	Aero MP305	23.75 - 24.00	1.0000	1.0000
L62	20	Aero MP305	23.75 - 24.00	1.0000	1.0000
L62	27	6" x 1" Flat Plate (G)	23.75 - 24.00	1.0000	1.0000
L62	28	6" x 1" Flat Plate (G)	23.75 - 24.00	1.0000	1.0000
L62	29	6" x 1" Flat Plate (G)	23.75 - 24.00	1.0000	1.0000
L62	37	6.5" x 1.25" Flat Plate (G)	23.75 - 24.00	1.0000	1.0000
L62	38	6.5" x 1.25" Flat Plate (G)	23.75 - 24.00	1.0000	1.0000
L62	39	6.5" x 1.25" Flat Plate (G)	23.75 - 24.00	1.0000	1.0000
L62	48	8.5" x 1.25" Flat Plate (G)	23.75 - 24.00	1.0000	1.0000
L62	54	8.5" x 1.25" Flat Plate (G)	23.75 - 24.00	1.0000	1.0000
L62	55	8.5" x 1.25" Flat Plate (G)	23.75 - 24.00	1.0000	1.0000
L63	1	LDF7-50A(1-5/8")	18.75 - 23.75	1.0000	1.0000
L63	4	2" Rigid Conduit	18.75 - 23.75	1.0000	1.0000
L63	6	HB114-1-08U4-M5J(1-1/4")	18.75 - 23.75	1.0000	1.0000
L63	10	561(1-5/8")	18.75 - 23.75	1.0000	1.0000
L63	14	LDF4P-50A(1/2")	18.75 - 23.75	1.0000	1.0000
L63	18	Aero MP305	18.75 - 23.75	1.0000	1.0000
L63	19	Aero MP305	18.75 - 23.75	1.0000	1.0000
L63	20	Aero MP305	18.75 - 23.75	1.0000	1.0000
L63	27	6" x 1" Flat Plate (G)	18.75 - 23.75	1.0000	1.0000
L63	28	6" x 1" Flat Plate (G)	18.75 - 23.75	1.0000	1.0000
L63	29	6" x 1" Flat Plate (G)	18.75 - 23.75	1.0000	1.0000
L63	37	6.5" x 1.25" Flat Plate (G)	23.00 - 23.75	1.0000	1.0000
L63	38	6.5" x 1.25" Flat Plate (G)	23.00 - 23.75	1.0000	1.0000
L63	39	6.5" x 1.25" Flat Plate (G)	23.00 - 23.75	1.0000	1.0000
L63	48	8.5" x 1.25" Flat Plate (G)	18.75 - 23.75	1.0000	1.0000
L63	54	8.5" x 1.25" Flat Plate (G)	20.40 - 23.75	1.0000	1.0000
L63	55	8.5" x 1.25" Flat Plate (G)	20.40 - 23.75	1.0000	1.0000
L64	1	LDF7-50A(1-5/8")	14.10 - 18.75	1.0000	1.0000
L64	4	2" Rigid Conduit	14.10 -	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
			18.75		
L64	6	HB114-1-08U4-M5J(1-1/4")	14.10 - 18.75	1.0000	1.0000
L64	10	561(1-5/8")	14.10 - 18.75	1.0000	1.0000
L64	14	LDF4P-50A(1/2")	14.10 - 18.75	1.0000	1.0000
L64	18	Aero MP305	14.10 - 18.75	1.0000	1.0000
L64	19	Aero MP305	14.10 - 18.75	1.0000	1.0000
L64	20	Aero MP305	14.10 - 18.75	1.0000	1.0000
L64	21	Aero MP304	14.10 - 15.50	1.0000	1.0000
L64	22	Aero MP304	14.10 - 15.50	1.0000	1.0000
L64	27	6" x 1" Flat Plate (G)	14.10 - 18.75	1.0000	1.0000
L64	28	6" x 1" Flat Plate (G)	14.10 - 18.75	1.0000	1.0000
L64	29	6" x 1" Flat Plate (G)	14.10 - 18.75	1.0000	1.0000
L64	48	8.5" x 1.25" Flat Plate (G)	14.10 - 18.75	1.0000	1.0000
L65	1	LDF7-50A(1-5/8")	13.80 - 14.10	1.0000	1.0000
L65	4	2" Rigid Conduit	13.80 - 14.10	1.0000	1.0000
L65	6	HB114-1-08U4-M5J(1-1/4")	13.80 - 14.10	1.0000	1.0000
L65	10	561(1-5/8")	13.80 - 14.10	1.0000	1.0000
L65	14	LDF4P-50A(1/2")	13.80 - 14.10	1.0000	1.0000
L65	18	Aero MP305	13.80 - 14.10	1.0000	1.0000
L65	19	Aero MP305	13.80 - 14.10	1.0000	1.0000
L65	20	Aero MP305	13.80 - 14.10	1.0000	1.0000
L65	21	Aero MP304	13.80 - 14.10	1.0000	1.0000
L65	22	Aero MP304	13.80 - 14.10	1.0000	1.0000
L65	27	6" x 1" Flat Plate (G)	13.80 - 14.10	1.0000	1.0000
L65	28	6" x 1" Flat Plate (G)	13.80 - 14.10	1.0000	1.0000
L65	29	6" x 1" Flat Plate (G)	13.80 - 14.10	1.0000	1.0000
L65	48	8.5" x 1.25" Flat Plate (G)	13.80 - 14.10	1.0000	1.0000
L66	1	LDF7-50A(1-5/8")	13.65 - 13.80	1.0000	1.0000
L66	4	2" Rigid Conduit	13.65 - 13.80	1.0000	1.0000
L66	6	HB114-1-08U4-M5J(1-1/4")	13.65 - 13.80	1.0000	1.0000
L66	10	561(1-5/8")	13.65 - 13.80	1.0000	1.0000
L66	14	LDF4P-50A(1/2")	13.65 - 13.80	1.0000	1.0000
L66	18	Aero MP305	13.65 - 13.80	1.0000	1.0000
L66	19	Aero MP305	13.65 - 13.80	1.0000	1.0000
L66	20	Aero MP305	13.65 - 13.80	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L66	21	Aero MP304	13.65 - 13.80	1.0000	1.0000
L66	22	Aero MP304	13.65 - 13.80	1.0000	1.0000
L66	27	6" x 1" Flat Plate (G)	13.65 - 13.80	1.0000	1.0000
L66	28	6" x 1" Flat Plate (G)	13.65 - 13.80	1.0000	1.0000
L66	29	6" x 1" Flat Plate (G)	13.65 - 13.80	1.0000	1.0000
L66	48	8.5" x 1.25" Flat Plate (G)	13.65 - 13.80	1.0000	1.0000
L67	1	LDF7-50A(1-5/8")	10.50 - 13.65	1.0000	1.0000
L67	4	2" Rigid Conduit	10.50 - 13.65	1.0000	1.0000
L67	6	HB114-1-08U4-M5J(1-1/4")	10.50 - 13.65	1.0000	1.0000
L67	10	561(1-5/8")	10.50 - 13.65	1.0000	1.0000
L67	14	LDF4P-50A(1/2")	10.50 - 13.65	1.0000	1.0000
L67	18	Aero MP305	11.50 - 13.65	1.0000	1.0000
L67	19	Aero MP305	10.50 - 13.65	1.0000	1.0000
L67	20	Aero MP305	10.50 - 13.65	1.0000	1.0000
L67	21	Aero MP304	10.50 - 13.65	1.0000	1.0000
L67	22	Aero MP304	10.50 - 13.65	1.0000	1.0000
L67	27	6" x 1" Flat Plate (G)	10.50 - 13.65	1.0000	1.0000
L67	28	6" x 1" Flat Plate (G)	10.50 - 13.65	1.0000	1.0000
L67	29	6" x 1" Flat Plate (G)	10.50 - 13.65	1.0000	1.0000
L67	48	8.5" x 1.25" Flat Plate (G)	10.50 - 13.65	1.0000	1.0000
L68	1	LDF7-50A(1-5/8")	10.25 - 10.50	1.0000	1.0000
L68	4	2" Rigid Conduit	10.25 - 10.50	1.0000	1.0000
L68	6	HB114-1-08U4-M5J(1-1/4")	10.25 - 10.50	1.0000	1.0000
L68	10	561(1-5/8")	10.25 - 10.50	1.0000	1.0000
L68	14	LDF4P-50A(1/2")	10.25 - 10.50	1.0000	1.0000
L68	19	Aero MP305	10.25 - 10.50	1.0000	1.0000
L68	20	Aero MP305	10.25 - 10.50	1.0000	1.0000
L68	21	Aero MP304	10.25 - 10.50	1.0000	1.0000
L68	22	Aero MP304	10.25 - 10.50	1.0000	1.0000
L68	27	6" x 1" Flat Plate (G)	10.25 - 10.50	1.0000	1.0000
L68	28	6" x 1" Flat Plate (G)	10.25 - 10.50	1.0000	1.0000
L68	29	6" x 1" Flat Plate (G)	10.25 - 10.50	1.0000	1.0000
L68	47	6" x 1" Flat Plate (G)	10.25 - 10.50	1.0000	1.0000
L69	1	LDF7-50A(1-5/8")	5.25 - 10.25	1.0000	1.0000
L69	4	2" Rigid Conduit	5.25 - 10.25	1.0000	1.0000
L69	6	HB114-1-08U4-M5J(1-	5.25 - 10.25	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
		1/4"			
L69	10	561(1-5/8")	5.25 - 10.25	1.0000	1.0000
L69	14	LDF4P-50A(1/2")	5.25 - 10.25	1.0000	1.0000
L69	19	Aero MP305	5.25 - 10.25	1.0000	1.0000
L69	20	Aero MP305	5.25 - 10.25	1.0000	1.0000
L69	21	Aero MP304	5.25 - 10.25	1.0000	1.0000
L69	22	Aero MP304	5.25 - 10.25	1.0000	1.0000
L69	27	6" x 1" Flat Plate (G)	5.25 - 10.25	1.0000	1.0000
L69	28	6" x 1" Flat Plate (G)	5.25 - 10.25	1.0000	1.0000
L69	29	6" x 1" Flat Plate (G)	5.25 - 10.25	1.0000	1.0000
L69	47	6" x 1" Flat Plate (G)	5.25 - 10.25	1.0000	1.0000
L70	1	LDF7-50A(1-5/8")	3.00 - 5.25	1.0000	1.0000
L70	4	2" Rigid Conduit	3.00 - 5.25	1.0000	1.0000
L70	6	HB114-1-08U4-M5J(1-1/4")	3.00 - 5.25	1.0000	1.0000
		1/4"			
L70	10	561(1-5/8")	3.00 - 5.25	1.0000	1.0000
L70	14	LDF4P-50A(1/2")	3.00 - 5.25	1.0000	1.0000
L70	19	Aero MP305	3.00 - 5.25	1.0000	1.0000
L70	20	Aero MP305	3.00 - 5.25	1.0000	1.0000
L70	21	Aero MP304	3.00 - 5.25	1.0000	1.0000
L70	22	Aero MP304	3.00 - 5.25	1.0000	1.0000
L70	27	6" x 1" Flat Plate (G)	3.00 - 5.25	1.0000	1.0000
L70	28	6" x 1" Flat Plate (G)	3.00 - 5.25	1.0000	1.0000
L70	29	6" x 1" Flat Plate (G)	3.00 - 5.25	1.0000	1.0000
L70	47	6" x 1" Flat Plate (G)	3.00 - 5.25	1.0000	1.0000
L71	1	LDF7-50A(1-5/8")	2.90 - 3.00	1.0000	1.0000
L71	4	2" Rigid Conduit	2.90 - 3.00	1.0000	1.0000
L71	6	HB114-1-08U4-M5J(1-1/4")	2.90 - 3.00	1.0000	1.0000
		1/4"			
L71	10	561(1-5/8")	2.90 - 3.00	1.0000	1.0000
L71	14	LDF4P-50A(1/2")	2.90 - 3.00	1.0000	1.0000
L71	19	Aero MP305	2.90 - 3.00	1.0000	1.0000
L71	20	Aero MP305	2.90 - 3.00	1.0000	1.0000
L71	21	Aero MP304	2.90 - 3.00	1.0000	1.0000
L71	22	Aero MP304	2.90 - 3.00	1.0000	1.0000
L71	27	6" x 1" Flat Plate (G)	2.90 - 3.00	1.0000	1.0000
L71	28	6" x 1" Flat Plate (G)	2.90 - 3.00	1.0000	1.0000
L71	29	6" x 1" Flat Plate (G)	2.90 - 3.00	1.0000	1.0000
L71	47	6" x 1" Flat Plate (G)	2.90 - 3.00	1.0000	1.0000
L72	1	LDF7-50A(1-5/8")	2.75 - 2.90	1.0000	1.0000
L72	4	2" Rigid Conduit	2.75 - 2.90	1.0000	1.0000
L72	6	HB114-1-08U4-M5J(1-1/4")	2.75 - 2.90	1.0000	1.0000
		1/4"			
L72	10	561(1-5/8")	2.75 - 2.90	1.0000	1.0000
L72	14	LDF4P-50A(1/2")	2.75 - 2.90	1.0000	1.0000
L72	19	Aero MP305	2.75 - 2.90	1.0000	1.0000
L72	20	Aero MP305	2.75 - 2.90	1.0000	1.0000
L72	21	Aero MP304	2.75 - 2.90	1.0000	1.0000
L72	22	Aero MP304	2.75 - 2.90	1.0000	1.0000
L72	27	6" x 1" Flat Plate (G)	2.75 - 2.90	1.0000	1.0000
L72	28	6" x 1" Flat Plate (G)	2.75 - 2.90	1.0000	1.0000
L72	29	6" x 1" Flat Plate (G)	2.75 - 2.90	1.0000	1.0000
L72	47	6" x 1" Flat Plate (G)	2.75 - 2.90	1.0000	1.0000
L73	1	LDF7-50A(1-5/8")	2.65 - 2.75	1.0000	1.0000
L73	4	2" Rigid Conduit	2.65 - 2.75	1.0000	1.0000
L73	6	HB114-1-08U4-M5J(1-1/4")	2.65 - 2.75	1.0000	1.0000
		1/4"			
L73	10	561(1-5/8")	2.65 - 2.75	1.0000	1.0000
L73	14	LDF4P-50A(1/2")	2.65 - 2.75	1.0000	1.0000
L73	19	Aero MP305	2.65 - 2.75	1.0000	1.0000
L73	20	Aero MP305	2.65 - 2.75	1.0000	1.0000
L73	21	Aero MP304	2.65 - 2.75	1.0000	1.0000
L73	22	Aero MP304	2.65 - 2.75	1.0000	1.0000
L73	27	6" x 1" Flat Plate (G)	2.65 - 2.75	1.0000	1.0000
L73	28	6" x 1" Flat Plate (G)	2.65 - 2.75	1.0000	1.0000
L73	29	6" x 1" Flat Plate (G)	2.65 - 2.75	1.0000	1.0000
L73	47	6" x 1" Flat Plate (G)	2.65 - 2.75	1.0000	1.0000
L74	1	LDF7-50A(1-5/8")	2.50 - 2.65	1.0000	1.0000
L74	4	2" Rigid Conduit	2.50 - 2.65	1.0000	1.0000

Tower Section	Feed Line Record No.	Description	Feed Line Segment Elev.	K _a No Ice	K _a Ice
L74	6	HB114-1-08U4-M5J(1-1/4")	2.50 - 2.65	1.0000	1.0000
L74	10	561(1-5/8")	2.50 - 2.65	1.0000	1.0000
L74	14	LDF4P-50A(1/2")	2.50 - 2.65	1.0000	1.0000
L74	19	Aero MP305	2.50 - 2.65	1.0000	1.0000
L74	20	Aero MP305	2.50 - 2.65	1.0000	1.0000
L74	21	Aero MP304	2.50 - 2.65	1.0000	1.0000
L74	22	Aero MP304	2.50 - 2.65	1.0000	1.0000
L74	27	6" x 1" Flat Plate (G)	2.50 - 2.65	1.0000	1.0000
L74	28	6" x 1" Flat Plate (G)	2.50 - 2.65	1.0000	1.0000
L74	29	6" x 1" Flat Plate (G)	2.50 - 2.65	1.0000	1.0000
L74	47	6" x 1" Flat Plate (G)	2.50 - 2.65	1.0000	1.0000
L75	1	LDF7-50A(1-5/8")	2.25 - 2.50	1.0000	1.0000
L75	4	2" Rigid Conduit	2.25 - 2.50	1.0000	1.0000
L75	6	HB114-1-08U4-M5J(1-1/4")	2.25 - 2.50	1.0000	1.0000
L75	10	561(1-5/8")	2.25 - 2.50	1.0000	1.0000
L75	14	LDF4P-50A(1/2")	2.25 - 2.50	1.0000	1.0000
L75	19	Aero MP305	2.25 - 2.50	1.0000	1.0000
L75	20	Aero MP305	2.25 - 2.50	1.0000	1.0000
L75	21	Aero MP304	2.25 - 2.50	1.0000	1.0000
L75	22	Aero MP304	2.25 - 2.50	1.0000	1.0000
L75	27	6" x 1" Flat Plate (G)	2.25 - 2.50	1.0000	1.0000
L75	28	6" x 1" Flat Plate (G)	2.25 - 2.50	1.0000	1.0000
L75	29	6" x 1" Flat Plate (G)	2.25 - 2.50	1.0000	1.0000
L75	47	6" x 1" Flat Plate (G)	2.25 - 2.50	1.0000	1.0000
L76	1	LDF7-50A(1-5/8")	1.90 - 2.25	1.0000	1.0000
L76	4	2" Rigid Conduit	1.90 - 2.25	1.0000	1.0000
L76	6	HB114-1-08U4-M5J(1-1/4")	1.90 - 2.25	1.0000	1.0000
L76	10	561(1-5/8")	1.90 - 2.25	1.0000	1.0000
L76	14	LDF4P-50A(1/2")	1.90 - 2.25	1.0000	1.0000
L76	19	Aero MP305	1.90 - 2.25	1.0000	1.0000
L76	20	Aero MP305	1.90 - 2.25	1.0000	1.0000
L76	21	Aero MP304	1.90 - 2.25	1.0000	1.0000
L76	22	Aero MP304	1.90 - 2.25	1.0000	1.0000
L76	27	6" x 1" Flat Plate (G)	1.90 - 2.25	1.0000	1.0000
L76	28	6" x 1" Flat Plate (G)	1.90 - 2.25	1.0000	1.0000
L76	29	6" x 1" Flat Plate (G)	1.90 - 2.25	1.0000	1.0000
L76	47	6" x 1" Flat Plate (G)	1.90 - 2.25	1.0000	1.0000
L77	1	LDF7-50A(1-5/8")	1.65 - 1.90	1.0000	1.0000
L77	4	2" Rigid Conduit	1.65 - 1.90	1.0000	1.0000
L77	6	HB114-1-08U4-M5J(1-1/4")	1.65 - 1.90	1.0000	1.0000
L77	10	561(1-5/8")	1.65 - 1.90	1.0000	1.0000
L77	14	LDF4P-50A(1/2")	1.65 - 1.90	1.0000	1.0000
L77	19	Aero MP305	1.65 - 1.90	1.0000	1.0000
L77	20	Aero MP305	1.65 - 1.90	1.0000	1.0000
L77	21	Aero MP304	1.65 - 1.90	1.0000	1.0000
L77	22	Aero MP304	1.65 - 1.90	1.0000	1.0000
L77	27	6" x 1" Flat Plate (G)	1.65 - 1.90	1.0000	1.0000
L77	28	6" x 1" Flat Plate (G)	1.65 - 1.90	1.0000	1.0000
L77	29	6" x 1" Flat Plate (G)	1.65 - 1.90	1.0000	1.0000
L77	47	6" x 1" Flat Plate (G)	1.65 - 1.90	1.0000	1.0000
L78	1	LDF7-50A(1-5/8")	0.00 - 1.65	1.0000	1.0000
L78	4	2" Rigid Conduit	0.00 - 1.65	1.0000	1.0000
L78	6	HB114-1-08U4-M5J(1-1/4")	0.00 - 1.65	1.0000	1.0000
L78	10	561(1-5/8")	0.00 - 1.65	1.0000	1.0000
L78	14	LDF4P-50A(1/2")	0.00 - 1.65	1.0000	1.0000
L78	19	Aero MP305	0.00 - 1.65	1.0000	1.0000
L78	20	Aero MP305	0.00 - 1.65	1.0000	1.0000
L78	21	Aero MP304	0.00 - 1.65	1.0000	1.0000
L78	22	Aero MP304	0.00 - 1.65	1.0000	1.0000
L78	27	6" x 1" Flat Plate (G)	0.50 - 1.65	1.0000	1.0000
L78	28	6" x 1" Flat Plate (G)	0.50 - 1.65	1.0000	1.0000
L78	29	6" x 1" Flat Plate (G)	0.50 - 1.65	1.0000	1.0000
L78	47	6" x 1" Flat Plate (G)	0.50 - 1.65	1.0000	1.0000

Discrete Tower Loads

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustmen t °	Placement ft	CAAA Front	CAAA Side	Weight K	
						ft ²	ft ²		
Lightning Rod	A	From Leg	1.0000	0.0000	156.0000	No Ice	0.2500	0.2500	0.0300
			0.0000			1/2"	0.6635	0.6635	0.0338
			0.0000			Ice	0.9732	0.9732	0.0393
						1" Ice			
**									
(2) SBNH-1D6565C w/ Mount Pipe	A	From Leg	4.0000	0.0000	156.0000	No Ice	11.6828	9.8418	0.0938
			0.0000			1/2"	12.4043	11.3657	0.1834
			1.0000			Ice	13.1351	12.9138	0.2831
						1" Ice			
(2) AM-X-CD-16-65-00T- RET w/ Mount Pipe	B	From Leg	4.0000	0.0000	156.0000	No Ice	8.2619	6.3042	0.0741
			0.0000			1/2"	8.8215	7.4790	0.1390
			1.0000			Ice	9.3462	8.3676	0.2119
						1" Ice			
(2) SBNH-1D6565C w/ Mount Pipe	C	From Leg	4.0000	0.0000	156.0000	No Ice	11.6828	9.8418	0.0938
			0.0000			1/2"	12.4043	11.3657	0.1834
			1.0000			Ice	13.1351	12.9138	0.2831
						1" Ice			
80010966 w/ Mount Pipe	A	From Leg	4.0000	0.0000	156.0000	No Ice	17.6005	9.6375	0.1475
			0.0000			1/2"	18.3314	11.1547	0.2633
			1.0000			Ice	19.0711	12.6961	0.3897
						1" Ice			
(2) 80010966 w/ Mount Pipe	B	From Leg	4.0000	0.0000	156.0000	No Ice	17.6005	9.6375	0.1475
			0.0000			1/2"	18.3314	11.1547	0.2633
			1.0000			Ice	19.0711	12.6961	0.3897
						1" Ice			
80010966 w/ Mount Pipe	C	From Leg	4.0000	0.0000	156.0000	No Ice	17.6005	9.6375	0.1475
			0.0000			1/2"	18.3314	11.1547	0.2633
			1.0000			Ice	19.0711	12.6961	0.3897
						1" Ice			
TPA-65R-LCUUUU-H8 w/ Mount Pipe	A	From Leg	4.0000	0.0000	156.0000	No Ice	13.5353	10.9597	0.1145
			0.0000			1/2"	14.2380	12.4861	0.2176
			1.0000			Ice	14.9495	14.0367	0.3310
						1" Ice			
TPA-65R-LCUUUU-H8 w/ Mount Pipe	C	From Leg	4.0000	0.0000	156.0000	No Ice	13.5353	10.9597	0.1145
			0.0000			1/2"	14.2380	12.4861	0.2176
			1.0000			Ice	14.9495	14.0367	0.3310
						1" Ice			
DTMABP7819VG12A	A	From Leg	4.0000	0.0000	156.0000	No Ice	0.9762	0.3387	0.0192
			0.0000			1/2"	1.1002	0.4192	0.0265
			1.0000			Ice	1.2316	0.5098	0.0356
						1" Ice			
DTMABP7819VG12A	B	From Leg	4.0000	0.0000	156.0000	No Ice	0.9762	0.3387	0.0192
			0.0000			1/2"	1.1002	0.4192	0.0265
			1.0000			Ice	1.2316	0.5098	0.0356
						1" Ice			
DTMABP7819VG12A	C	From Leg	4.0000	0.0000	156.0000	No Ice	0.9762	0.3387	0.0192
			0.0000			1/2"	1.1002	0.4192	0.0265
			1.0000			Ice	1.2316	0.5098	0.0356
						1" Ice			
RRUS 11	A	From Leg	4.0000	0.0000	156.0000	No Ice	2.7845	1.1872	0.0476
			0.0000			1/2"	2.9919	1.3342	0.0684
			1.0000			Ice	3.2066	1.4897	0.0923
						1" Ice			
RRUS 11	B	From Leg	4.0000	0.0000	156.0000	No Ice	2.7845	1.1872	0.0476
			0.0000			1/2"	2.9919	1.3342	0.0684
			1.0000			Ice	3.2066	1.4897	0.0923
						1" Ice			

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C _{AA}		Weight	
			Horz	Lateral			Front	Side		
			ft	ft	°	ft	ft ²	ft ²	K	
RRUS 11	C	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	2.7845	1.1872	0.0476
			0.0000				1/2"	2.9919	1.3342	0.0684
			1.0000				Ice	3.2066	1.4897	0.0923
DC6-48-60-18-8F	A	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	0.7915	0.7915	0.0200
			0.0000				1/2"	1.2743	1.2743	0.0351
			1.0000				Ice	1.4503	1.4503	0.0526
RRUS 4478 B14	A	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	1.8425	1.0588	0.0599
			0.0000				1/2"	2.0123	1.1969	0.0758
			1.0000				Ice	2.1895	1.3425	0.0943
RRUS 4478 B14	B	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	1.8425	1.0588	0.0599
			0.0000				1/2"	2.0123	1.1969	0.0758
			1.0000				Ice	2.1895	1.3425	0.0943
RRUS 4478 B14	C	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	1.8425	1.0588	0.0599
			0.0000				1/2"	2.0123	1.1969	0.0758
			1.0000				Ice	2.1895	1.3425	0.0943
RRUS 32 B66	A	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	2.7427	1.6681	0.0530
			0.0000				1/2"	2.9647	1.8552	0.0741
			1.0000				Ice	3.1941	2.0493	0.0984
RRUS 32 B66	B	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	2.7427	1.6681	0.0530
			0.0000				1/2"	2.9647	1.8552	0.0741
			1.0000				Ice	3.1941	2.0493	0.0984
RRUS 32 B66	C	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	2.7427	1.6681	0.0530
			0.0000				1/2"	2.9647	1.8552	0.0741
			1.0000				Ice	3.1941	2.0493	0.0984
RRUS 12	A	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	3.1450	1.2854	0.0580
			0.0000				1/2"	3.3648	1.4379	0.0812
			1.0000				Ice	3.5920	1.5998	0.1076
RRUS 12	B	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	3.1450	1.2854	0.0580
			0.0000				1/2"	3.3648	1.4379	0.0812
			1.0000				Ice	3.5920	1.5998	0.1076
RRUS 12	C	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	3.1450	1.2854	0.0580
			0.0000				1/2"	3.3648	1.4379	0.0812
			1.0000				Ice	3.5920	1.5998	0.1076
RRUS 32 B2	A	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	2.7313	1.6681	0.0529
			0.0000				1/2"	2.9531	1.8552	0.0740
			1.0000				Ice	3.1823	2.0493	0.0982
RRUS 32 B2	B	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	2.7313	1.6681	0.0529
			0.0000				1/2"	2.9531	1.8552	0.0740
			1.0000				Ice	3.1823	2.0493	0.0982
RRUS 32 B2	C	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	2.7313	1.6681	0.0529
			0.0000				1/2"	2.9531	1.8552	0.0740
			1.0000				Ice	3.1823	2.0493	0.0982
RRUS 32	A	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	2.8571	1.7766	0.0551
			0.0000				1/2"	3.0830	1.9677	0.0774
			1.0000				Ice	3.3163	2.1658	0.1029
RRUS 32	B	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	2.8571	1.7766	0.0551
			0.0000				1/2"	3.0830	1.9677	0.0774
			1.0000				Ice	3.3163	2.1658	0.1029
RRUS 32	C	From Leg	4.0000	0.0000	0.0000	156.0000	No Ice	2.8571	1.7766	0.0551
			0.0000				1/2"	3.0830	1.9677	0.0774
			1.0000				Ice	3.3163	2.1658	0.1029

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustmen t °	Placement ft	CAAA Front ft²	CAAA Side ft²	Weight K	
			0.0000			1/2"	3.0830	1.9677	0.0774
			1.0000			Ice	3.3163	2.1658	0.1029
DC6-48-60-0-8F	A	From Leg	4.0000	0.0000	156.0000	1" Ice	0.9167	0.9167	0.0328
			0.0000			No Ice	1.4583	1.4583	0.0505
			1.0000			Ice	1.6431	1.6431	0.0707
DC6-48-60-18-8F	A	From Leg	4.0000	0.0000	156.0000	1" Ice	0.7915	0.7915	0.0200
			0.0000			No Ice	1.2743	1.2743	0.0351
			1.0000			Ice	1.4503	1.4503	0.0526
T-Arm Mount [TA 703-3]	C	None		0.0000	156.0000	1" Ice	14.2000	14.2000	0.4470
						No Ice	18.5000	18.5000	0.6450
						Ice	22.8000	22.8000	0.8430
						1" Ice			
** (2) PCS 1900MHz 4x45W-65MHz	A	From Leg	1.0000	0.0000	148.0000	No Ice	2.3218	2.2381	0.0600
			0.0000			1/2"	2.5266	2.4407	0.0831
			0.0000			Ice	2.7388	2.6507	0.1095
(2) PCS 1900MHz 4x45W-65MHz	B	From Leg	1.0000	0.0000	148.0000	1" Ice	2.3218	2.2381	0.0600
			0.0000			No Ice	2.5266	2.4407	0.0831
			0.0000			Ice	2.7388	2.6507	0.1095
(2) PCS 1900MHz 4x45W-65MHz	C	From Leg	1.0000	0.0000	148.0000	1" Ice	2.3218	2.2381	0.0600
			0.0000			No Ice	2.5266	2.4407	0.0831
			0.0000			Ice	2.7388	2.6507	0.1095
800MHz 2X50W RRH W/FILTER	A	From Leg	1.0000	0.0000	148.0000	1" Ice	2.0583	1.9317	0.0640
			0.0000			No Ice	2.2398	2.1087	0.0861
			0.0000			Ice	2.4287	2.2931	0.1113
800MHz 2X50W RRH W/FILTER	B	From Leg	1.0000	0.0000	148.0000	1" Ice	2.0583	1.9317	0.0640
			0.0000			No Ice	2.2398	2.1087	0.0861
			0.0000			Ice	2.4287	2.2931	0.1113
800MHz 2X50W RRH W/FILTER	C	From Leg	1.0000	0.0000	148.0000	1" Ice	2.0583	1.9317	0.0640
			0.0000			No Ice	2.2398	2.1087	0.0861
			0.0000			Ice	2.4287	2.2931	0.1113
Side Arm Mount [SO 103-3]	C	None		0.0000	148.0000	1" Ice	9.5000	9.5000	0.2240
						No Ice	11.8000	11.8000	0.3170
						Ice	14.1000	14.1000	0.4100
(2) 4' x 2" Pipe Mount	A	From Leg	1.0000	0.0000	148.0000	1" Ice	0.7852	0.7852	0.0290
			0.0000			No Ice	1.0284	1.0284	0.0353
			0.0000			Ice	1.2809	1.2809	0.0445
(2) 4' x 2" Pipe Mount	B	From Leg	1.0000	0.0000	148.0000	1" Ice	0.7852	0.7852	0.0290
			0.0000			No Ice	1.0284	1.0284	0.0353
			0.0000			Ice	1.2809	1.2809	0.0445
(2) 4' x 2" Pipe Mount	C	From Leg	1.0000	0.0000	148.0000	1" Ice	0.7852	0.7852	0.0290
			0.0000			No Ice	1.0284	1.0284	0.0353
			0.0000			Ice	1.2809	1.2809	0.0445
** APXVTM14-C-120 w/ Mount Pipe	A	From Leg	4.0000	0.0000	146.0000	1" Ice	6.5799	4.9591	0.0738
			0.0000			No Ice	7.0306	5.7544	0.1284
			1.0000			Ice	7.4733	6.4723	0.1897
APXVTM14-C-120 w/ Mount Pipe	B	From Leg	4.0000	0.0000	146.0000	1" Ice	6.5799	4.9591	0.0738
			0.0000			No Ice	7.0306	5.7544	0.1284
			1.0000			Ice	7.4733	6.4723	0.1897
						1" Ice			

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C _{AA}		Weight			
			Horz	Lateral			Front	Side				
			ft	ft	°	ft	ft ²	ft ²	K			
APXVMTM14-C-120 w/ Mount Pipe	C	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	6.5799	4.9591	0.0738		
			0.0000				1/2"	7.0306	5.7544	0.1284		
			1.0000				Ice	7.4733	6.4723	0.1897		
APXV9ERR18-C-A20 w/ Mount Pipe	A	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	8.2619	7.4708	0.0876		
			0.0000				1/2"	8.8215	8.6564	0.1580		
			1.0000				Ice	9.3462	9.5559	0.2365		
APXVSP18-C-A20 w/ Mount Pipe	B	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	8.2619	6.9458	0.0826		
			0.0000				1/2"	8.8215	8.1266	0.1506		
			1.0000				Ice	9.3462	9.0212	0.2265		
APXVSP18-C-A20 w/ Mount Pipe	C	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	8.2619	6.9458	0.0826		
			0.0000				1/2"	8.8215	8.1266	0.1506		
			1.0000				Ice	9.3462	9.0212	0.2265		
TD-RRH8x20-25	A	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	4.0455	1.5345	0.0700		
			0.0000				1/2"	4.2975	1.7142	0.0972		
			1.0000				Ice	4.5570	1.9008	0.1278		
TD-RRH8x20-25	B	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	4.0455	1.5345	0.0700		
			0.0000				1/2"	4.2975	1.7142	0.0972		
			1.0000				Ice	4.5570	1.9008	0.1278		
TD-RRH8x20-25	C	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	4.0455	1.5345	0.0700		
			0.0000				1/2"	4.2975	1.7142	0.0972		
			1.0000				Ice	4.5570	1.9008	0.1278		
IBC1900HG-2A	A	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	0.9660	0.4635	0.0220		
			0.0000				1/2"	1.0908	0.5576	0.0297		
			0.0000				Ice	1.2230	0.6599	0.0393		
IBC1900HG-2A	B	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	0.9660	0.4635	0.0220		
			0.0000				1/2"	1.0908	0.5576	0.0297		
			0.0000				Ice	1.2230	0.6599	0.0393		
IBC1900HG-2A	C	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	0.9660	0.4635	0.0220		
			0.0000				1/2"	1.0908	0.5576	0.0297		
			0.0000				Ice	1.2230	0.6599	0.0393		
IBC1900BB-1	A	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	0.9660	0.4635	0.0220		
			0.0000				1/2"	1.0908	0.5576	0.0297		
			0.0000				Ice	1.2230	0.6599	0.0393		
IBC1900BB-1	B	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	0.9660	0.4635	0.0220		
			0.0000				1/2"	1.0908	0.5576	0.0297		
			0.0000				Ice	1.2230	0.6599	0.0393		
IBC1900BB-1	C	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	0.9660	0.4635	0.0220		
			0.0000				1/2"	1.0908	0.5576	0.0297		
			0.0000				Ice	1.2230	0.6599	0.0393		
Platform Mount [LP 1201-1]	C	None			0.0000	146.0000	No Ice	23.1000	23.1000	2.1000		
							1/2"	26.8000	26.8000	2.5000		
							Ice	30.5000	30.5000	2.9000		
Miscellaneous [NA 510-1]	C	None			0.0000	146.0000	No Ice	6.0000	6.0000	0.2557		
							1/2"	8.5000	8.5000	0.3395		
							Ice	11.0000	11.0000	0.4233		
5' x 2" Pipe Mount	A	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	1.1875	1.1875	0.0183		
			0.0000				1/2"	1.4956	1.4956	0.0273		
			1.0000				Ice	1.8071	1.8071	0.0398		
5' x 2" Pipe Mount	B	From Leg	4.0000	0.0000	0.0000	146.0000	No Ice	1.1875	1.1875	0.0183		

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustment t °	Placement ft	C _{AA} Front ft ²	C _{AA} Side ft ²	Weight K	
			0.0000			1/2"	1.4956	1.4956	0.0273
			1.0000			Ice	1.8071	1.8071	0.0398
5' x 2" Pipe Mount	C	From Leg	4.0000	0.0000	146.0000	1" Ice	1.1875	1.1875	0.0183
			0.0000			No Ice	1.4956	1.4956	0.0273
			1.0000			Ice	1.8071	1.8071	0.0398
						1" Ice			
** APXV18-206517S-C	A	From Leg	2.0000	30.0000	139.0000	No Ice	5.1667	3.0375	0.0264
			0.0000			1/2"	5.6182	3.4693	0.0530
			0.0000			Ice	6.0772	3.9086	0.0851
						1" Ice			
APXV18-206517S-C	B	From Leg	2.0000	30.0000	139.0000	No Ice	5.1667	3.0375	0.0264
			0.0000			1/2"	5.6182	3.4693	0.0530
			0.0000			Ice	6.0772	3.9086	0.0851
						1" Ice			
APXV18-206517S-C	C	From Leg	2.0000	30.0000	139.0000	No Ice	5.1667	3.0375	0.0264
			0.0000			1/2"	5.6182	3.4693	0.0530
			0.0000			Ice	6.0772	3.9086	0.0851
						1" Ice			
Pipe Mount [PM 501-3]	C	None		0.0000	139.0000	No Ice	5.7800	5.7800	0.1560
						1/2"	7.3700	7.3700	0.1769
						Ice	8.9600	8.9600	0.1979
						1" Ice			
** BXA-80080-6CF-EDIN-X w/ Mount Pipe	A	From Leg	4.0000	0.0000	132.0000	No Ice	6.0062	6.2035	0.0432
			0.0000			1/2"	6.5619	7.3594	0.0978
			2.0000			Ice	7.0826	8.2293	0.1600
						1" Ice			
BXA-80080-6CF-EDIN-X w/ Mount Pipe	B	From Leg	4.0000	0.0000	132.0000	No Ice	6.0062	6.2035	0.0432
			0.0000			1/2"	6.5619	7.3594	0.0978
			2.0000			Ice	7.0826	8.2293	0.1600
						1" Ice			
BXA-80080-6CF-EDIN-X w/ Mount Pipe	C	From Leg	4.0000	0.0000	132.0000	No Ice	6.0062	6.2035	0.0432
			0.0000			1/2"	6.5619	7.3594	0.0978
			2.0000			Ice	7.0826	8.2293	0.1600
						1" Ice			
(2) SBNHH-1D65B w/ Mount Pipe	A	From Leg	4.0000	0.0000	132.0000	No Ice	8.3858	7.0840	0.0765
			0.0000			1/2"	8.9496	8.2754	0.1455
			1.0000			Ice	9.4797	9.1876	0.2226
						1" Ice			
(2) SBNHH-1D65B w/ Mount Pipe	B	From Leg	4.0000	0.0000	132.0000	No Ice	8.3858	7.0840	0.0765
			0.0000			1/2"	8.9496	8.2754	0.1455
			1.0000			Ice	9.4797	9.1876	0.2226
						1" Ice			
(2) SBNHH-1D65B w/ Mount Pipe	C	From Leg	4.0000	0.0000	132.0000	No Ice	8.3858	7.0840	0.0765
			0.0000			1/2"	8.9496	8.2754	0.1455
			1.0000			Ice	9.4797	9.1876	0.2226
						1" Ice			
BXA-70063/6CFx2	A	From Leg	4.0000	0.0000	132.0000	No Ice	7.5690	3.7554	0.0170
			0.0000			1/2"	8.0160	4.1889	0.0576
			1.0000			Ice	8.4701	4.6297	0.1040
						1" Ice			
BXA-70063/6CFx2	B	From Leg	4.0000	0.0000	132.0000	No Ice	7.5690	3.7554	0.0170
			0.0000			1/2"	8.0160	4.1889	0.0576
			1.0000			Ice	8.4701	4.6297	0.1040
						1" Ice			
BXA-70063/6CFx2	C	From Leg	4.0000	0.0000	132.0000	No Ice	7.5690	3.7554	0.0170
			0.0000			1/2"	8.0160	4.1889	0.0576
			1.0000			Ice	8.4701	4.6297	0.1040
						1" Ice			
RFV01U-D1A	A	From Leg	4.0000	0.0000	132.0000	No Ice	1.8750	1.2500	0.0844
			0.0000			1/2"	2.0454	1.3926	0.1027
			1.0000			Ice	2.2231	1.5426	0.1239
						1" Ice			

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C _{AA} Front	C _{AA} Side	Weight	
			Horz	Lateral						Vert
			ft	ft	°	ft	ft ²	ft ²	K	
RFV01U-D1A	B	From Leg	4.0000	0.0000	0.0000	132.0000	No Ice	1.8750	1.2500	0.0844
			0.0000				1/2"	2.0454	1.3926	0.1027
			1.0000				Ice	2.2231	1.5426	0.1239
RFV01U-D1A	C	From Leg	4.0000	0.0000	0.0000	132.0000	No Ice	1.8750	1.2500	0.0844
			0.0000				1/2"	2.0454	1.3926	0.1027
			1.0000				Ice	2.2231	1.5426	0.1239
RFV01U-D2A	A	From Leg	4.0000	0.0000	0.0000	132.0000	No Ice	1.8750	1.0125	0.0703
			0.0000				1/2"	2.0454	1.1445	0.0867
			1.0000				Ice	2.2231	1.2840	0.1058
RFV01U-D2A	B	From Leg	4.0000	0.0000	0.0000	132.0000	No Ice	1.8750	1.0125	0.0703
			0.0000				1/2"	2.0454	1.1445	0.0867
			1.0000				Ice	2.2231	1.2840	0.1058
RFV01U-D2A	C	From Leg	4.0000	0.0000	0.0000	132.0000	No Ice	1.8750	1.0125	0.0703
			0.0000				1/2"	2.0454	1.1445	0.0867
			1.0000				Ice	2.2231	1.2840	0.1058
DB-C1-12C-24AB-0Z	A	From Leg	4.0000	0.0000	0.0000	132.0000	No Ice	4.0563	3.0975	0.0320
			0.0000				1/2"	4.3155	3.3351	0.0685
			1.0000				Ice	4.5822	3.5801	0.1090
DB-T1-6Z-8AB-0Z	B	From Leg	4.0000	0.0000	0.0000	132.0000	No Ice	4.8000	2.0000	0.0440
			0.0000				1/2"	5.0704	2.1926	0.0801
			1.0000				Ice	5.3481	2.3926	0.1202
Sector Mount [SM 503-3]	C	None			0.0000	132.0000	No Ice	33.6400	33.6400	1.6905
							1/2"	48.1700	48.1700	2.2551
							Ice	62.7000	62.7000	2.8197
Pipe Mount [PM 602-3]	C	None			0.0000	132.0000	No Ice	7.6800	7.6800	0.2790
							1/2"	9.5000	9.5000	0.3532
							Ice	11.3200	11.3200	0.4274
Side-by-Side Mounting Kit [PN. BSAMNT-SBS-2-2]	A	From Leg	4.0000	0.0000	0.0000	132.0000	No Ice	0.0000	0.1106	0.0700
			0.0000				1/2"	0.0000	0.1792	0.0799
			1.0000				Ice	0.0000	0.2520	0.0957
Side-by-Side Mounting Kit [PN. BSAMNT-SBS-2-2]	B	From Leg	4.0000	0.0000	0.0000	132.0000	No Ice	0.0000	0.1106	0.0700
			0.0000				1/2"	0.0000	0.1792	0.0799
			1.0000				Ice	0.0000	0.2520	0.0957
Side-by-Side Mounting Kit [PN. BSAMNT-SBS-2-2]	C	From Leg	4.0000	0.0000	0.0000	132.0000	No Ice	0.0000	0.1106	0.0700
			0.0000				1/2"	0.0000	0.1792	0.0799
			1.0000				Ice	0.0000	0.2520	0.0957
**										
HORIZON COMPACT	A	From Leg	1.0000	0.0000	0.0000	129.0000	No Ice	0.7208	0.3681	0.0115
			0.0000				1/2"	0.8278	0.4499	0.0180
			1.0000				Ice	0.9422	0.5391	0.0261
HORIZON COMPACT	B	From Leg	1.0000	0.0000	0.0000	129.0000	No Ice	0.7208	0.3681	0.0115
			0.0000				1/2"	0.8278	0.4499	0.0180
			1.0000				Ice	0.9422	0.5391	0.0261

Dishes

Description	Face or Leg	Dish Type	Offset Type	Offsets: Horz Lateral Vert	Azimuth Adjustment °	3 dB Beam Width °	Elevation ft	Outside Diameter ft	Aperture Area ft ²	Weight K
VHLP800-11	A	Paraboloid w/Shroud (HP)	From Leg	1.0000 0.0000 -2.0000	0.0000		129.0000	2.9167	No Ice 6.6800 1/2" Ice 7.0700 1" Ice 7.4600	0.0200 0.0300 0.0300
VHLP800-11	B	Paraboloid w/Shroud (HP)	From Leg	1.0000 0.0000 -2.0000	30.0000		129.0000	2.9167	No Ice 6.6800 1/2" Ice 7.0700 1" Ice 7.4600	0.0200 0.0300 0.0300
VHLP2-18	C	Paraboloid w/o Radome	From Leg	1.0000 0.0000 -2.0000	90.0000		129.0000	2.1750	No Ice 3.7200 1/2" Ice 4.0100 1" Ice 4.3000	0.0310 0.0500 0.0700
**										

Load Combinations

Comb. No.	Description
1	Dead Only
2	1.2 Dead+1.6 Wind 0 deg - No Ice
3	0.9 Dead+1.6 Wind 0 deg - No Ice
4	1.2 Dead+1.6 Wind 30 deg - No Ice
5	0.9 Dead+1.6 Wind 30 deg - No Ice
6	1.2 Dead+1.6 Wind 60 deg - No Ice
7	0.9 Dead+1.6 Wind 60 deg - No Ice
8	1.2 Dead+1.6 Wind 90 deg - No Ice
9	0.9 Dead+1.6 Wind 90 deg - No Ice
10	1.2 Dead+1.6 Wind 120 deg - No Ice
11	0.9 Dead+1.6 Wind 120 deg - No Ice
12	1.2 Dead+1.6 Wind 150 deg - No Ice
13	0.9 Dead+1.6 Wind 150 deg - No Ice
14	1.2 Dead+1.6 Wind 180 deg - No Ice
15	0.9 Dead+1.6 Wind 180 deg - No Ice
16	1.2 Dead+1.6 Wind 210 deg - No Ice
17	0.9 Dead+1.6 Wind 210 deg - No Ice
18	1.2 Dead+1.6 Wind 240 deg - No Ice
19	0.9 Dead+1.6 Wind 240 deg - No Ice
20	1.2 Dead+1.6 Wind 270 deg - No Ice
21	0.9 Dead+1.6 Wind 270 deg - No Ice
22	1.2 Dead+1.6 Wind 300 deg - No Ice
23	0.9 Dead+1.6 Wind 300 deg - No Ice
24	1.2 Dead+1.6 Wind 330 deg - No Ice
25	0.9 Dead+1.6 Wind 330 deg - No Ice
26	1.2 Dead+1.0 Ice
27	1.2 Dead+1.0 Wind 0 deg+1.0 Ice
28	1.2 Dead+1.0 Wind 30 deg+1.0 Ice
29	1.2 Dead+1.0 Wind 60 deg+1.0 Ice
30	1.2 Dead+1.0 Wind 90 deg+1.0 Ice
31	1.2 Dead+1.0 Wind 120 deg+1.0 Ice
32	1.2 Dead+1.0 Wind 150 deg+1.0 Ice
33	1.2 Dead+1.0 Wind 180 deg+1.0 Ice
34	1.2 Dead+1.0 Wind 210 deg+1.0 Ice
35	1.2 Dead+1.0 Wind 240 deg+1.0 Ice
36	1.2 Dead+1.0 Wind 270 deg+1.0 Ice
37	1.2 Dead+1.0 Wind 300 deg+1.0 Ice
38	1.2 Dead+1.0 Wind 330 deg+1.0 Ice
39	Dead+Wind 0 deg - Service
40	Dead+Wind 30 deg - Service
41	Dead+Wind 60 deg - Service
42	Dead+Wind 90 deg - Service
43	Dead+Wind 120 deg - Service
44	Dead+Wind 150 deg - Service
45	Dead+Wind 180 deg - Service
46	Dead+Wind 210 deg - Service
47	Dead+Wind 240 deg - Service
48	Dead+Wind 270 deg - Service

Comb. No.	Description
49	Dead+Wind 300 deg - Service
50	Dead+Wind 330 deg - Service

Maximum Member Forces

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L1	160 - 155	Pole	Max Tension	27	0.0000	-0.0001	0.0000
			Max. Compression	26	-14.6899	0.8787	2.4778
			Max. Mx	20	-2.5887	20.0024	0.5466
			Max. My	2	-2.6068	0.0595	20.1902
			Max. Vy	8	10.5110	-19.9568	0.0401
			Max. Vx	2	-10.3694	0.0595	20.1902
			Max. Torque	16			-2.3099
L2	155 - 150	Pole	Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-15.5046	0.7821	2.5882
			Max. Mx	8	-3.0593	-73.2590	-0.5503
			Max. My	2	-3.0809	0.6593	72.7622
			Max. Vy	8	10.7890	-73.2590	-0.5503
			Max. Vx	2	-10.6472	0.6593	72.7622
			Max. Torque	16			-2.3099
L3	150 - 146	Pole	Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-19.3249	0.7021	2.6764
			Max. Mx	8	-4.3918	-120.3500	-1.0312
			Max. My	2	-4.4133	1.1398	119.2681
			Max. Vy	8	12.7369	-120.3500	-1.0312
			Max. Vx	2	-12.5947	1.1398	119.2681
			Max. Torque	16			-2.3094
L4	146 - 141	Pole	Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-29.6675	0.5087	2.9473
			Max. Mx	8	-8.2256	-210.6615	-1.6234
			Max. My	2	-8.2504	1.7258	208.7143
			Max. Vy	8	17.8623	-210.6615	-1.6234
			Max. Vx	2	-17.6961	1.7258	208.7143
			Max. Torque	18			-2.3871
L5	141 - 136	Pole	Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-31.5791	0.3061	3.1329
			Max. Mx	8	-8.9610	-304.1021	-2.2344
			Max. My	2	-8.9845	2.3056	301.2834
			Max. Vy	8	19.3086	-304.1021	-2.2344
			Max. Vx	2	-19.1425	2.3056	301.2834
			Max. Torque	18			-2.3862
L6	136 - 131	Pole	Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-45.0712	-1.0177	3.9148
			Max. Mx	8	-12.8846	-414.2898	-2.9437
			Max. My	2	-12.9096	2.8078	410.4003
			Max. Vy	8	26.7612	-414.2898	-2.9437
			Max. Vx	2	-26.5758	2.8078	410.4003
			Max. Torque	18			-2.5854
L7	131 - 126	Pole	Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-46.7016	-1.2168	4.1954
			Max. Mx	8	-13.6963	-550.3771	-4.1899
			Max. My	2	-13.6914	3.8905	545.8555
			Max. Vy	8	28.0549	-550.3771	-4.1899
			Max. Vx	14	28.2284	-5.6294	-544.1647
			Max. Torque	20			-2.7832
L8	126 - 121	Pole	Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-48.0215	-1.3522	4.4475
			Max. Mx	8	-14.5339	-692.0200	-6.9245
			Max. My	2	-14.5280	5.5696	687.9178
			Max. Vy	8	28.5954	-692.0200	-6.9245
			Max. Vx	14	28.7701	-8.0937	-686.5213
			Max. Torque	20			-2.7826
L9	121 - 120.1	Pole	Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-48.2985	-1.3765	4.4922
			Max. Mx	8	-14.6927	-717.8011	-7.4168

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L10	120.1 - 119.85	Pole	Max. My	2	-14.6867	5.8711	713.7749
			Max. Vy	8	28.6904	-717.8011	-7.4168
			Max. Vx	14	28.8653	-8.5376	-712.4309
			Max. Torque	20			-2.7794
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-48.3939	-1.3834	4.5050
L11	119.85 - 117.5	Pole	Max. Mx	8	-14.7688	-724.9785	-7.5538
			Max. My	2	-14.7627	5.9554	720.9734
			Max. Vy	8	28.7122	-724.9785	-7.5538
			Max. Vx	14	28.8873	-8.6613	-719.6440
			Max. Torque	20			-2.7790
			Max Tension	1	0.0000	0.0000	0.0000
L12	117.5 - 117.25	Pole	Max. Compression	26	-49.3188	-1.4810	4.6235
			Max. Mx	8	-15.2830	-792.8290	-8.8382
			Max. My	2	-15.2768	6.7419	789.0229
			Max. Vy	8	29.0137	-792.8290	-8.8382
			Max. Vx	14	29.1890	-9.8203	-787.8297
			Max. Torque	20			-2.7788
L13	117.25 - 115.5	Pole	Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-49.4238	-1.4936	4.6368
			Max. Mx	8	-15.3579	-800.0882	-8.9751
			Max. My	2	-15.3516	6.8262	796.3032
			Max. Vy	8	29.0392	-800.0882	-8.9751
			Max. Vx	14	29.2145	-9.9441	-795.1245
L14	115.5 - 115.25	Pole	Max. Torque	20			-2.7781
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-50.2113	-1.5471	4.7237
			Max. Mx	8	-15.7642	-851.1252	-9.9316
			Max. My	2	-15.7579	7.4114	847.4887
			Max. Vy	8	29.2738	-851.1252	-9.9316
L15	115.25 - 110.25	Pole	Max. Vx	14	29.4493	-10.8079	-846.4107
			Max. Torque	20			-2.7779
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-50.3346	-1.5541	4.7366
			Max. Mx	8	-15.8563	-858.4484	-10.0687
			Max. My	2	-15.8500	7.4959	854.8331
L16	110.25 - 103.75	Pole	Max. Vy	8	29.2959	-858.4484	-10.0687
			Max. Vx	14	29.4714	-10.9319	-853.7695
			Max. Torque	20			-2.7775
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-52.8009	-1.6931	4.9864
			Max. Mx	8	-17.2364	-	-12.8036
L17	103.75 - 102.5	Pole	Max. My	2	-17.2299	9.1678	1003.4768
			Max. Vy	8	29.9702	-	-12.8036
			Max. Vx	14	30.1462	-13.4055	-
			Max. Torque	20			1002.6974
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-54.1704	-1.7714	5.1261
L17	103.75 - 102.5	Pole	Max. Mx	8	-18.0105	-	-14.3080
			Max. My	2	-18.0040	10.0865	1086.6594
			Max. Vy	8	30.3406	-	-14.3080
			Max. Vx	14	30.5168	-14.7693	-
			Max. Torque	20			1086.0329
			Max Tension	1	0.0000	0.0000	0.0000
L17	103.75 - 102.5	Pole	Max. Torque	20			-2.7758
			Max Tension	1	0.0000	0.0000	0.0000
L17	103.75 - 102.5	Pole	Max. Compression	26	-57.9411	-1.9138	5.3802

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L18	102.5 - 100.5	Pole	Max. Mx	8	-20.3361	-	-17.0498
			Max. My	2	-20.3296	1243.3433	1240.8154
			Max. Vy	8	31.1110	11.7612	-17.0498
			Max. Vx	14	31.2876	-	-
			Max. Torque	20		1243.3433	1240.4678
			Max Tension	1	0.0000	-17.2549	-2.7744
			Max. Compression	26	-58.9828	-1.9696	5.4841
			Max. Mx	8	-20.9639	-	-18.1486
			Max. My	2	-20.9575	1305.8363	1303.4796
			Max. Vy	8	31.3700	12.4315	-18.1486
L19	100.5 - 100.25	Pole	Max. Vx	14	31.5467	1305.8363	-
			Max. Torque	20		-18.2512	1303.2434
			Max Tension	1	0.0000	0.0000	-2.7741
			Max. Compression	26	-59.1211	-1.9769	5.5034
			Max. Mx	8	-21.0516	-	-18.2862
			Max. My	2	-21.0452	1313.6846	1311.3494
			Max. Vy	8	31.3958	12.5158	-18.2862
			Max. Vx	14	31.5725	-	-
			Max. Torque	20		1313.6846	1311.1271
			Max Tension	1	0.0000	-18.3761	-2.7735
L20	100.25 - 98.5	Pole	Max. Compression	26	-60.0815	-2.0149	5.6347
			Max. Mx	8	-21.5655	-	-19.2470
			Max. My	2	-21.5591	1368.8473	1366.6622
			Max. Vy	8	31.6360	13.1012	-19.2470
			Max. Vx	14	31.8128	-	-
			Max. Torque	20		1368.8473	1366.5365
			Max Tension	1	0.0000	-19.2479	-2.7732
			Max. Compression	26	-60.2192	-2.0163	5.6538
			Max. Mx	8	-21.6701	-	-19.3848
			Max. My	2	-21.6637	1376.7600	1374.5963
L21	98.5 - 98.25	Pole	Max. Vy	8	31.6529	13.1854	-19.3848
			Max. Vx	14	31.8297	-	-
			Max. Torque	20		1376.7600	1374.4844
			Max Tension	1	0.0000	-19.3731	-2.7728
			Max. Compression	26	-62.8494	-2.1313	6.0338
			Max. Mx	8	-23.2695	-	-22.1294
			Max. My	14	-23.2554	1536.7034	-
			Max. Vy	8	32.3063	-21.8674	1535.1295
			Max. Vx	14	32.4835	-	-22.1294
			Max. Torque	20		1536.7034	1535.1295
L22	98.25 - 93.25	Pole	Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-62.8494	-2.1313	6.0338
			Max. Mx	8	-23.2695	-	-22.1294
			Max. My	14	-23.2554	1536.7034	-
			Max. Vy	8	32.3063	-21.8674	1535.1295
			Max. Vx	14	32.4835	-	-22.1294
			Max. Torque	20		1536.7034	1535.1295
			Max Tension	1	0.0000	0.0000	-2.7726
			Max. Compression	26	-64.2831	-2.2134	6.2436
			Max. Mx	8	-24.1642	-	-23.6376
L23	93.25 - 90.5	Pole	Max. My	14	-24.1504	1626.0494	-
			Max. Vy	8	32.3063	-23.2404	-
			Max. Vx	14	32.4835	-	1624.8596

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft	
L24	90.5 - 90.25	Pole	Max. Vy	8	32.6660	-	-23.6376	
			Max. Vx	14	32.8433	1626.0494 -23.2404	-	
			Max. Torque	20			1624.8596	
			Max Tension	1	0.0000	0.0000	-2.7709	0.0000
			Max. Compression	26	-64.4263	-2.2202	6.2651	
			Max. Mx	8	-24.2751	-	-23.7750	
			Max. My	14	-24.2614	1634.2204 -23.3657	-	
			Max. Vy	8	32.6860	-	1633.0654	
			Max. Vx	14	32.8633	1634.2204 -23.3657	-	
			Max. Torque	20			1633.0654	
L25	90.25 - 85.25	Pole	Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-67.3056	-2.3568	6.6882	
			Max. Mx	8	-26.0990	-	-26.5143	
			Max. My	14	-26.0861	1799.3651 -25.8635	-	
			Max. Vy	8	33.3530	-	1798.9045	
			Max. Vx	14	33.5307	1799.3651 -25.8635	-	
			Max. Torque	20			1798.9045	
			Max Tension	1	0.0000	0.0000	-2.7700	0.0000
			Max. Compression	26	-68.4595	-2.4038	6.7871	
			Max. Mx	8	-26.7384	-	-27.4720	
L26	85.25 - 83.5	Pole	Max. My	14	-26.7257	1857.9443 -26.7381	-	
			Max. Vy	8	33.5931	-	1857.7255	
			Max. Vx	14	33.7708	1857.9443 -26.7381	-	
			Max. Torque	20			1857.7255	
			Max Tension	1	0.0000	0.0000	-2.7685	0.0000
			Max. Compression	26	-68.6440	-2.4102	6.8006	
			Max. Mx	8	-26.8747	-	-27.6092	
			Max. My	14	-26.8622	1866.3460 -26.8635	-	
			Max. Vy	8	33.6087	-	1866.1617	
			Max. Vx	14	33.7864	1866.3460 -26.8635	-	
L27	83.5 - 83.25	Pole	Max. Torque	20			1866.1617	
			Max Tension	1	0.0000	0.0000	-2.7682	0.0000
			Max. Compression	26	-70.4877	-2.4720	6.9302	
			Max. Mx	8	-27.9612	-	-28.9765	
			Max. My	14	-27.9488	1950.8467 -28.1133	-	
			Max. Vy	8	33.9709	-	1951.0068	
			Max. Vx	14	34.1487	1950.8467 -28.1133	-	
			Max. Torque	20			1951.0068	
			Max Tension	1	0.0000	0.0000	-2.7680	0.0000
			Max. Compression	26	-70.6836	-2.4783	6.9437	
L28	83.25 - 80.75	Pole	Max. Mx	8	-28.0953	-	-29.1134	
			Max. My	14	-28.0831	1959.3456 -28.2387	-	
			Max. Vy	8	33.9976	-	1959.5401	
			Max. Torque	20			-2.7680	0.0000
			Max Tension	1	0.0000	0.0000	6.9437	
			Max. Compression	26	-70.6836	-2.4783	6.9437	
			Max. Mx	8	-28.0953	-	-29.1134	
			Max. My	14	-28.0831	1959.3456 -28.2387	-	
			Max. Vy	8	33.9976	-	1959.5401	
			Max. Vx	14	34.1487	1959.3456 -28.2387	-	
L29	80.75 - 80.5	Pole	Max. Torque	20			1959.5401	
			Max Tension	1	0.0000	0.0000	-2.7680	0.0000
			Max. Compression	26	-70.6836	-2.4783	6.9437	
			Max. Mx	8	-28.0953	-	-29.1134	
			Max. My	14	-28.0831	1959.3456 -28.2387	-	
			Max. Vy	8	33.9976	-	1959.5401	
			Max. Vx	14	34.1487	1959.3456 -28.2387	-	
			Max. Torque	20			1959.5401	
			Max Tension	1	0.0000	0.0000	-2.7680	0.0000
			Max. Compression	26	-70.6836	-2.4783	6.9437	

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L30	80.5 - 80.25	Pole	Max. Vx	14	34.1754	1959.3456 -28.2387	-
			Max. Torque	20			1959.5401 -2.7676
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-70.8775	-2.4846	6.9568
			Max. Mx	8	-28.2140	-	-29.2501
			Max. My	14	-28.2018	-28.3637	-
			Max. Vy	8	34.0339	-	1968.0823 -29.2501
			Max. Vx	14	34.2117	-28.3637	-
			Max. Torque	20			1967.8535 -2.7676
			Max Tension	1	0.0000	0.0000	0.0000
L31	80.25 - 77.5	Pole	Max. Compression	26	-73.0071	-2.5533	7.1005
			Max. Mx	8	-29.5080	-	-30.7537
			Max. My	14	-29.4960	-29.7400	-
			Max. Vy	8	34.4400	-	2062.6391 -30.7537
			Max. Vx	14	34.6179	-29.7400	-
			Max. Torque	20			2062.0332 -2.7674
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-73.1832	-2.5598	7.1142
			Max. Mx	8	-29.6245	-	-30.8906
			Max. My	14	-29.6126	-29.8655	-
L32	77.5 - 77.25	Pole	Max. Vy	8	34.4634	-	2071.2889 -30.8906
			Max. Vx	14	34.6413	-29.8655	-
			Max. Torque	20			2070.6488 -2.7670
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-76.0573	-2.6398	7.3395
			Max. Mx	8	-31.3732	-	-33.2110
			Max. My	14	-31.3620	-31.9951	-
			Max. Vy	8	35.0304	-	2219.5805 -33.2110
			Max. Vx	14	35.2085	-31.9951	-
			Max. Torque	20			2218.3633 -2.7668
L33	77.25 - 68.5	Pole	Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-81.5971	-2.7298	7.6042
			Max. Mx	8	-35.1025	-	-35.9426
			Max. My	14	-35.0918	-34.5024	-
			Max. Vy	8	35.8292	-	2397.4925 -35.9426
			Max. Vx	14	36.0075	-34.5024	-
			Max. Torque	20			2395.5956 -2.7653
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-84.2940	-2.8116	7.8025
			Max. Mx	8	-36.7761	-	-37.9909
L34	68.5 - 68	Pole	Max. My	14	-36.7660	-36.3849	-
			Max. Vy	8	36.3173	-	2533.2949 -37.9909
			Max. Vx	14	36.4957	-36.3849	-
			Max. Torque	20			2530.8905 -2.7653
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-84.2940	-2.8116	7.8025
			Max. Mx	8	-36.7761	-	-37.9909
			Max. My	14	-36.7660	-36.3849	-
			Max. Vy	8	36.3173	-	2533.2949 -37.9909
			Max. Vx	14	36.4957	-36.3849	-
L35	68 - 64.25	Pole	Max. Torque	20			2530.8905 -2.7653
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-84.2940	-2.8116	7.8025
			Max. Mx	8	-36.7761	-	-37.9909
			Max. My	14	-36.7660	-36.3849	-
			Max. Vy	8	36.3173	-	2533.2949 -37.9909
			Max. Vx	14	36.4957	-36.3849	-
			Max. Torque	20			2530.8905 -2.7653
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-84.2940	-2.8116	7.8025

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft	
L36	64.25 - 64	Pole	Max. Torque	20			-2.7651	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-84.4862	-2.8183	7.8162	
			Max. Mx	8	-36.9138	-	-38.1276	
						2539.9738		
			Max. My	14	-36.9039	-36.5106	-	2542.4120
			Max. Vy	8	36.3335	-	-38.1276	
						2539.9738		
			Max. Vx	14	36.5118	-36.5106	-	2542.4120
L37	64 - 60.5	Pole	Max. Torque	20			-2.7643	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-87.1915	-2.8981	8.0376	
			Max. Mx	8	-38.5780	-	-40.0349	
						2667.9979		
			Max. My	14	-38.5686	-38.2662	-	2670.9068
			Max. Vy	8	36.8047	-	-40.0349	
						2667.9979		
			Max. Vx	14	36.9831	-38.2662	-	2670.9068
L38	60.5 - 60.25	Pole	Max. Torque	20			-2.7642	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-87.4047	-2.9050	8.0513	
			Max. Mx	8	-38.7190	-	-40.1712	
						2677.2041		
			Max. My	14	-38.7097	-38.3917	-	2680.1465
			Max. Vy	8	36.8246	-	-40.1712	
						2677.2041		
			Max. Vx	14	37.0029	-38.3917	-	2680.1465
L39	60.25 - 60.1	Pole	Max. Torque	20			-2.7636	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-87.5327	-2.9092	8.0597	
			Max. Mx	8	-38.7966	-	-40.2528	
						2682.7318		
			Max. My	14	-38.7874	-38.4670	-	2685.6943
			Max. Vy	8	36.8455	-	-40.2528	
						2682.7318		
			Max. Vx	14	37.0238	-38.4670	-	2685.6943
L40	60.1 - 59.85	Pole	Max. Torque	20			-2.7636	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-87.7468	-2.9184	8.0779	
			Max. Mx	8	-38.9263	-	-40.3889	
						2691.9511		
			Max. My	14	-38.9171	-38.5923	-	2694.9471
			Max. Vy	8	36.8781	-	-40.3889	
						2691.9511		
			Max. Vx	14	37.0564	-38.5923	-	2694.9471
L41	59.85 - 59.1	Pole	Max. Torque	20			-2.7636	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-88.3821	-2.9516	8.1444	
			Max. Mx	8	-39.3123	-	-40.7970	
						2719.6599		
			Max. My	14	-39.3032	-38.9684	-	2722.7562
			Max. Vy	8	36.9851	-	-40.7970	
						2719.6599		
			Max. Vx	14	37.1635	-38.9684	-	2722.7562
L42	59.1 - 58.85	Pole	Max. Torque	20			-2.7635	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-88.6026	-2.9628	8.1670	

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L43	58.85 - 55.4	Pole	Max. Mx	8	-39.4584	-	-40.9330
			Max. My	14	-39.4493	2728.9132 -39.0938	-
			Max. Vy	8	37.0134	-	2732.0430
			Max. Vx	14	37.1917	2728.9132 -39.0938	-40.9330
			Max. Torque	20			-
			Max Tension	1	0.0000	0.0000	-2.7634
			Max. Compression	26	-91.6348	-3.1150	0.0000
			Max. Mx	8	-41.3671	-	8.4617
			Max. My	14	-41.3584	2857.4767 -40.8237	-42.8085
			Max. Vy	8	37.4943	-	2861.0666
L44	55.4 - 55.15	Pole	Max. Vx	14	37.6727	2857.4767 -40.8237	-
			Max. Torque	20			2861.0666
			Max Tension	1	0.0000	0.0000	-2.7633
			Max. Compression	26	-91.8558	-3.1255	0.0000
			Max. Mx	8	-41.5190	-	8.4825
			Max. My	14	-41.5105	2866.8559 -40.9492	-42.9444
			Max. Vy	8	37.5165	-	-
			Max. Vx	14	37.6949	2866.8559 -40.9492	2870.4791
			Max. Torque	20			-2.7629
			Max Tension	1	0.0000	0.0000	0.0000
L45	55.15 - 54.75	Pole	Max. Compression	26	-92.2094	-3.1422	8.5148
			Max. Mx	8	-41.7416	-	-43.1616
			Max. My	14	-41.7331	2881.8801 -41.1498	-
			Max. Vy	8	37.5719	-	2885.5564
			Max. Vx	14	37.7503	2881.8801 -41.1498	-43.1616
			Max. Torque	20			-
			Max Tension	1	0.0000	0.0000	2885.5564
			Max. Compression	26	-92.4121	-3.1527	-2.7628
			Max. Mx	8	-41.8664	-	0.0000
			Max. My	14	-41.8579	2891.2810 -41.2751	8.5354
L46	54.75 - 54.5	Pole	Max. Vy	8	37.6030	-	-43.2974
			Max. Vx	14	37.7814	2891.2810 -41.2751	-
			Max. Torque	20			2894.9905
			Max Tension	1	0.0000	0.0000	-2.7628
			Max. Compression	26	-92.4121	-3.1527	0.0000
			Max. Mx	8	-41.8664	-	8.5354
			Max. My	14	-41.8579	2891.2810 -41.2751	-43.2974
			Max. Vy	8	37.6030	-	-
			Max. Vx	14	37.7814	2891.2810 -41.2751	2894.9905
			Max. Torque	20			-2.7628
L47	54.5 - 49.5	Pole	Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-96.3165	-3.3253	8.9450
			Max. Mx	8	-44.3272	-	-46.0075
			Max. My	14	-44.3196	3080.9289 -43.7801	-
			Max. Vy	8	38.2365	-	3085.2993
			Max. Vx	14	38.4149	3080.9289 -43.7801	-46.0075
			Max. Torque	20			-
			Max Tension	1	0.0000	0.0000	3085.2993
			Max. Compression	26	-100.1168	-3.4449	-2.7627
			Max. Mx	8	-46.8297	-	0.0000
L48	49.5 - 44.5	Pole	Max. My	14	-46.8297	3273.6375	9.3229
			Max. Vy	8			-48.7065
			Max. Vx	14			

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft	
L49	44.5 - 41.3	Pole	Max. My	14	-46.8231	-46.2798	-	
			Max. Vy	8	38.8401	-	3278.6625	
			Max. Vx	14	39.0183	-46.2798	-	
			Max. Torque	20			3273.6375	-2.7619
			Max Tension	1	0.0000	0.0000	-	0.0000
			Max. Compression	26	-102.6157	-3.4765	-	9.4716
			Max. Mx	8	-48.4491	-	-	-50.4273
			Max. My	14	-48.4431	-47.8762	3398.5362	-
			Max. Vy	8	39.2170	-	-	3403.9768
			Max. Vx	14	39.3952	-47.8762	3398.5362	-50.4273
L50	41.3 - 41.05	Pole	Max. Torque	20			-	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-102.8224	-3.4791	-	9.4836
			Max. Mx	8	-48.6008	-	-	-50.5616
			Max. My	14	-48.5949	-48.0009	3408.3446	-
			Max. Vy	8	39.2309	-	-	3413.8176
			Max. Vx	14	39.4090	-48.0009	3408.3446	-50.5616
			Max. Torque	20				-
			Max Tension	1	0.0000	0.0000	-	3413.8176
			Max. Compression	26	-104.5770	-3.5182	-	-2.7608
L51	41.05 - 34	Pole	Max. Mx	8	-49.7172	-	0.0000	
			Max. My	14	-49.7116	-49.0224	3489.0523	
			Max. Vy	8	39.4861	-	-	0.0000
			Max. Vx	14	39.6642	-49.0224	3489.0523	
			Max. Torque	20				9.5798
			Max Tension	1	0.0000	0.0000	-	-51.6602
			Max. Compression	26	-104.5770	-3.5182	-	-
			Max. Mx	8	-49.7172	-	-	3494.7888
			Max. My	14	-49.7116	-49.0224	3489.0523	-51.6602
			Max. Vy	8	39.4861	-	-	-
L52	34 - 33	Pole	Max. Vx	14	39.6642	-49.0224	-	
			Max. Torque	20				3494.7888
			Max Tension	1	0.0000	0.0000	-	-2.7608
			Max. Compression	26	-113.2706	-3.6398	-	0.0000
			Max. Mx	8	-55.9321	-	-	9.8622
			Max. My	14	-55.9270	-52.0107	3728.7104	-54.8738
			Max. Vy	8	40.3611	-	-	-
			Max. Vx	14	40.5392	-52.0107	3728.7104	-
			Max. Torque	20				3735.2184
			Max Tension	1	0.0000	0.0000	-	-54.8738
L53	33 - 31.5	Pole	Max. Compression	26	-114.7352	-3.6785	9.9322	
			Max. Mx	8	-56.8981	-	-	-55.6766
			Max. My	14	-56.8932	-52.7575	3789.3968	-
			Max. Vy	8	40.5487	-	-	3796.0972
			Max. Vx	14	40.7268	-52.7575	3789.3968	-55.6766
			Max. Torque	20				-
			Max Tension	1	0.0000	0.0000	-	3796.0972
			Max. Compression	26	-114.7352	-3.6785	-	-2.7604
			Max. Mx	8	-56.8981	-	-	0.0000
			Max. My	14	-56.8932	-52.7575	3789.3968	9.9322
L54	31.5 - 31.25	Pole	Max. Vy	8	40.5598	-	-55.6766	
			Max. Vx	14	40.7268	-52.7575	-	
			Max. Torque	20				3796.0972
			Max Tension	1	0.0000	0.0000	-	-2.7603
			Max. Compression	26	-114.9854	-3.6821	-	0.0000
			Max. Mx	8	-57.0774	-	-	9.9545
Max. My	14	-57.0727	-52.8820	3799.5376	-55.8104			
Max. Vy	8	40.5598	-	-	-			

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft	
L55	31.25 - 30.5	Pole	Max. Vx	14	40.7360	3799.5376 -52.8820	-	
			Max. Torque	20			3806.2697	
			Max Tension	1	0.0000	0.0000	-2.7602	
			Max. Compression	26	-115.7279	-3.6977	0.0000	
			Max. Mx	8	-57.5636	-	10.0017	
							-56.2113	
			Max. My	14	-57.5590	-53.2552	-	
			Max. Vy	8	40.6561	-	3836.8314	
							-56.2113	
							3830.0046 -53.2552	-
L56	30.5 - 30.25	Pole	Max. Torque	20			3836.8314	
			Max Tension	1	0.0000	0.0000	-2.7602	
			Max. Compression	26	-115.9707	-3.7040	0.0000	
			Max. Mx	8	-57.7308	-	10.0137	
							-56.3450	
			Max. My	14	-57.7262	-53.3796	-	
			Max. Vy	8	40.6775	-	3847.0333	
							-56.3450	
							3840.1751 -53.3796	-
							3840.1751 -53.3796	-
L57	30.25 - 25.75	Pole	Max. Torque	20			3847.0333	
			Max Tension	1	0.0000	0.0000	-2.7601	
			Max. Compression	26	-120.3235	-3.8172	10.2248	
			Max. Mx	8	-60.6181	-	-58.7444	
							4024.4479	
			Max. My	14	-60.6142	-55.6157	-	
			Max. Vy	8	41.1997	-	4031.8703	
							-58.7444	
							4024.4479 -55.6157	-
							4024.4479 -55.6157	-
L58	25.75 - 25.5	Pole	Max. Torque	20			4031.8703	
			Max Tension	1	0.0000	0.0000	-2.7601	
			Max. Compression	26	-120.5636	-3.8237	10.2368	
			Max. Mx	8	-60.7898	-	-58.8775	
							4034.7521	
			Max. My	14	-60.7859	-55.7399	-	
			Max. Vy	8	41.2112	-	4042.2056	
							-58.8775	
							4034.7521 -55.7399	-
							4034.7521 -55.7399	-
L59	25.5 - 24.7	Pole	Max. Torque	20			4042.2056	
			Max Tension	1	0.0000	0.0000	-2.7598	
			Max. Compression	26	-121.3316	-3.8439	10.2743	
			Max. Mx	8	-61.2953	-	-59.3028	
							4067.7708	
			Max. My	14	-61.2916	-56.1367	-	
			Max. Vy	8	41.3079	-	4075.3240	
							-59.3028	
							4067.7708 -56.1367	-
							4067.7708 -56.1367	-
L60	24.7 - 24.45	Pole	Max. Torque	20			4075.3240	
			Max Tension	1	0.0000	0.0000	-2.7598	
			Max. Compression	26	-121.5500	-3.8504	10.2863	
			Max. Mx	8	-61.4418	-	-59.4358	
							4078.1033	
			Max. My	14	-61.4381	-56.2608	-	
			Max. Vy	8	41.3240	-	4085.6876	
							-59.4358	
							4078.1033 -56.2608	-
							4078.1033 -56.2608	-

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L61	24.45 - 24	Pole	Max. Torque	20			4085.6876
			Max Tension	1	0.0000	0.0000	-2.7598
			Max. Compression	26	-121.9429	-3.8618	0.0000
			Max. Mx	8	-61.6903	-	10.3074
						4096.7176	-59.6748
			Max. My	14	-61.6867	-56.4839	-
			Max. Vy	8	41.3735	-	4104.3578
						4096.7176	-59.6748
			Max. Vx	14	41.5493	-56.4839	-
							4104.3578
L62	24 - 23.75	Pole	Max. Torque	20			-2.7597
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-122.1836	-3.8682	10.3193
			Max. Mx	8	-61.8548	-	-59.8076
						4107.0681	-
			Max. My	14	-61.8513	-56.6078	-
			Max. Vy	8	41.3962	-	4114.7394
						4107.0681	-59.8076
			Max. Vx	14	41.5721	-56.6078	-
							4114.7394
L63	23.75 - 18.75	Pole	Max. Torque	20			-2.7597
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-126.6911	-3.9617	10.4941
			Max. Mx	8	-65.0594	-	-62.4555
						4315.4773	-
			Max. My	14	-65.0565	-59.0825	-
			Max. Vy	8	41.9415	-	4323.7662
						4315.4773	-62.4555
			Max. Vx	14	42.1171	-59.0825	-
							4323.7662
L64	18.75 - 14.1	Pole	Max. Torque	20			-2.7597
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-130.7590	-4.0952	10.5507
			Max. Mx	8	-68.0720	-	-64.9057
						4511.5990	-
			Max. My	14	-68.0698	-61.3770	-
			Max. Vy	8	42.4024	-	4520.4558
						4511.5990	-64.9057
			Max. Vx	14	42.5778	-61.3770	-
							4520.4558
L65	14.1 - 13.8	Pole	Max. Torque	20			-2.7594
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-131.0311	-4.1039	10.5555
			Max. Mx	8	-68.2821	-	-65.0635
						4524.3249	-
			Max. My	14	-68.2800	-61.5249	-
			Max. Vy	8	42.4145	-	4533.2182
						4524.3249	-65.0635
			Max. Vx	14	42.5898	-61.5249	-
							4533.2182
L66	13.8 - 13.65	Pole	Max. Torque	20			-2.7593
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-131.1671	-4.1083	10.5580
			Max. Mx	8	-68.3836	-	-65.1423
						4530.6912	-
			Max. My	14	-68.3815	-61.5988	-
			Max. Vy	8	42.4274	-	4539.6027
						4530.6912	-65.1423
			Max. Vx	14	42.6027	-61.5988	-
							4539.6027
			Max. Torque	20		-2.7593	

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft	
L67	13.65 - 10.5	Pole	Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-133.9940	-4.2110	10.5672	
			Max. Mx	8	-70.4639	-	-66.7938	
						4664.8843		
			Max. My	14	-70.4622	-63.1483	-	
								4674.1766
			Max. Vy	8	42.7478	-	-66.7938	
						4664.8843		
			Max. Vx	14	42.9229	-63.1483	-	
								4674.1766
L68	10.5 - 10.25	Pole	Max. Torque	20			-2.7593	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-134.2101	-4.2220	10.5633	
			Max. Mx	8	-70.6358	-	-66.9248	
						4675.5756		
			Max. My	14	-70.6342	-63.2712	-	
								4684.8980
			Max. Vy	8	42.7564	-	-66.9248	
						4675.5756		
			Max. Vx	14	42.9314	-63.2712	-	
L69	10.25 - 5.25	Pole	Max. Torque	20			-2.7592	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-138.4879	-4.4404	10.4900	
			Max. Mx	8	-73.8685	-	-69.5328	
						4890.6570		
			Max. My	14	-73.8676	-65.7226	-	
								4900.5774
			Max. Vy	8	43.2492	-	-69.5328	
						4890.6570		
			Max. Vx	14	43.4239	-65.7226	-	
L70	5.25 - 3	Pole	Max. Torque	20			-2.7592	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-140.3890	-4.5365	10.4628	
			Max. Mx	8	-75.3391	-	-70.7010	
						4988.2206		
			Max. My	14	-75.3385	-66.8223	-	
								4998.4077
			Max. Vy	8	43.4652	-	-70.7010	
						4988.2206		
			Max. Vx	14	43.6398	-66.8223	-	
L71	3 - 2.9	Pole	Max. Torque	20			-2.7591	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-140.4705	-4.5408	10.4618	
			Max. Mx	8	-75.4152	-	-70.7530	
						4992.5679		
			Max. My	14	-75.4147	-66.8712	-	
								5002.7668
			Max. Vy	8	43.4535	-	-70.7530	
						4992.5679		
			Max. Vx	14	43.6280	-66.8712	-	
L72	2.9 - 2.75	Pole	Max. Torque	20			-2.7591	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-140.5856	-4.5471	10.4602	
			Max. Mx	8	-75.5028	-	-70.8307	
						4999.0905		
			Max. My	14	-75.5023	-66.9445	-	
								5009.3071
			Max. Vy	8	43.4678	-	-70.8307	
						4999.0905		
			Max. Vx	14	43.6422	-66.9445	-	
L73	2.75 - 2.65	Pole	Max. Torque	20			-2.7591	
			Max Tension	1	0.0000	0.0000	0.0000	
			Max. Compression	26	-140.6623	-4.5513	10.4592	
			Max. Mx	8	-75.5623	-	-70.8825	

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Axial K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L74	2.65 - 2.5	Pole	Max. My	14	-75.5619	5003.4401 -66.9933	-
			Max. Vy	8	43.4762	-	5013.6685 -70.8825
			Max. Vx	14	43.6506	5003.4401 -66.9933	-
			Max. Torque	20			5013.6685 -2.7591
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-140.7772	-4.5575	10.4576
			Max. Mx	8	-75.6500	-	-70.9602
			Max. My	14	-75.6496	-67.0665	-
			Max. Vy	8	43.4904	-	5020.2122 -70.9602
			Max. Vx	14	43.6648	5009.9661 -67.0665	-
L75	2.5 - 2.25	Pole	Max. Torque	20			5020.2122 -2.7591
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-140.9701	-4.5680	10.4551
			Max. Mx	8	-75.7980	-	-71.0897
			Max. My	14	-75.7976	-67.1885	-
			Max. Vy	8	43.5150	-	5031.1229 -71.0897
			Max. Vx	14	43.6894	5020.8473 -67.1885	-
			Max. Torque	20			5031.1229 -2.7591
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-141.2393	-4.5825	10.4518
L76	2.25 - 1.9	Pole	Max. Mx	8	-76.0060	-	-71.2709
			Max. My	14	-76.0056	5036.0904 -67.3592	-
			Max. Vy	8	43.5487	-	5046.4072 -71.2709
			Max. Vx	14	43.7231	5036.0904 -67.3592	-
			Max. Torque	20			5046.4072 -2.7591
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-141.4223	-4.5928	10.4497
			Max. Mx	8	-76.1487	-	-71.4003
			Max. My	14	-76.1484	5046.9849 -67.4812	-
			Max. Vy	8	43.5684	-	5057.3312 -71.4003
L77	1.9 - 1.65	Pole	Max. Vx	14	43.7428	5046.9849 -67.4812	-
			Max. Torque	20			5057.3312 -2.7591
			Max Tension	1	0.0000	0.0000	0.0000
			Max. Compression	26	-142.5814	-4.6584	10.4503
			Max. Mx	8	-77.0624	-	-72.2527
			Max. My	14	-77.0623	5119.0269 -68.2848	-
			Max. Vy	8	43.7485	-	5129.5670 -72.2527
			Max. Vx	14	43.9227	5119.0269 -68.2848	-
			Max. Torque	20			5129.5670 -2.7590
			L78	1.65 - 0	Pole	Max. Torque	20

Maximum Reactions

Location	Condition	Gov. Load Comb.	Vertical K	Horizontal, X K	Horizontal, Z K
Pole	Max. Vert	27	142.5814	0.0718	11.2690
	Max. H _x	21	57.8146	43.6450	0.4818
	Max. H _z	2	77.0862	0.3356	43.7890
	Max. M _x	2	5125.3500	0.3356	43.7890
	Max. M _z	8	5119.0269	-43.7065	-0.5453
	Max. Torsion	6	2.5637	-37.5867	21.6290
	Min. Vert	11	57.8146	-37.8472	-22.4505
	Min. H _x	8	77.0862	-43.7065	-0.5453
	Min. H _z	14	77.0862	-0.4591	-43.8807
	Min. M _x	14	-5129.5670	-0.4591	-43.8807
	Min. M _z	20	-5104.0474	43.6450	0.4818
	Min. Torsion	20	-2.7591	43.6450	0.4818

Tower Mast Reaction Summary

Load Combination	Vertical K	Shear _x K	Shear _z K	Overturning Moment, M _x kip-ft	Overturning Moment, M _z kip-ft	Torque kip-ft
Dead Only	64.2385	0.0000	0.0000	-3.1613	-2.7921	-0.0000
1.2 Dead+1.6 Wind 0 deg - No Ice	77.0862	-0.3356	-43.7890	-5125.3500	45.0598	-1.0874
0.9 Dead+1.6 Wind 0 deg - No Ice	57.8146	-0.3356	-43.7890	-5073.1170	45.4465	-1.0933
1.2 Dead+1.6 Wind 30 deg - No Ice	77.0862	21.3894	-37.8316	-4425.2123	-2496.5899	-2.0534
0.9 Dead+1.6 Wind 30 deg - No Ice	57.8146	21.3894	-37.8316	-4379.9979	-2470.7372	-2.0505
1.2 Dead+1.6 Wind 60 deg - No Ice	77.0862	37.5867	-21.6290	-2525.9774	-4397.0257	-2.5637
0.9 Dead+1.6 Wind 60 deg - No Ice	57.8146	37.5867	-21.6290	-2499.7686	-4352.1399	-2.5523
1.2 Dead+1.6 Wind 90 deg - No Ice	77.0862	43.7065	0.5453	72.2530	-5119.0269	-1.9424
0.9 Dead+1.6 Wind 90 deg - No Ice	57.8146	43.7065	0.5453	72.4866	-5066.9143	-1.9252
1.2 Dead+1.6 Wind 120 deg - No Ice	77.0862	37.8472	22.4505	2633.6988	-4435.3741	-1.0873
0.9 Dead+1.6 Wind 120 deg - No Ice	57.8146	37.8472	22.4505	2608.3285	-4390.0859	-1.0692
1.2 Dead+1.6 Wind 150 deg - No Ice	77.0862	22.0838	38.2037	4470.4290	-2595.3776	0.1143
0.9 Dead+1.6 Wind 150 deg - No Ice	57.8146	22.0838	38.2037	4426.6940	-2568.5041	0.1283
1.2 Dead+1.6 Wind 180 deg - No Ice	77.0862	0.4591	43.8807	5129.5670	-68.2850	1.3518
0.9 Dead+1.6 Wind 180 deg - No Ice	57.8146	0.4591	43.8807	5079.2444	-66.7164	1.3578
1.2 Dead+1.6 Wind 210 deg - No Ice	77.0862	-21.3182	38.0467	4445.6971	2480.2300	2.3238
0.9 Dead+1.6 Wind 210 deg - No Ice	57.8146	-21.3182	38.0467	4402.2299	2456.2660	2.3203
1.2 Dead+1.6 Wind 240 deg - No Ice	77.0862	-37.5247	21.7767	2537.6389	4381.9259	2.3374
0.9 Dead+1.6 Wind 240 deg - No Ice	57.8146	-37.5247	21.7767	2513.2580	4338.9070	2.3254
1.2 Dead+1.6 Wind 270 deg - No Ice	77.0862	-43.6450	-0.4818	-71.6873	5104.0474	2.7591
0.9 Dead+1.6 Wind 270 deg - No Ice	57.8146	-43.6450	-0.4818	-69.9821	5053.7926	2.7425
1.2 Dead+1.6 Wind 300 deg - No Ice	77.0862	-37.9310	-22.2579	-2616.1702	4439.5049	1.7766
0.9 Dead+1.6 Wind 300 deg - No Ice	57.8146	-37.9310	-22.2579	-2589.0149	4395.8948	1.7594
1.2 Dead+1.6 Wind 330 deg - No Ice	77.0862	-22.0574	-38.1035	-4465.1086	2584.9817	0.2242

Load Combination	Vertical	Shear _x	Shear _z	Overturning Moment, M _x	Overturning Moment, M _z	Torque
	K	K	K	kip-ft	kip-ft	kip-ft
- No Ice						
0.9 Dead+1.6 Wind 330 deg	57.8146	-22.0574	-38.1035	-4419.4678	2559.9337	0.2109
- No Ice						
1.2 Dead+1.0 Ice	142.5814	0.0000	-0.0000	-10.4503	-4.6584	-0.0005
1.2 Dead+1.0 Wind 0 deg+1.0 Ice	142.5814	-0.0718	-11.2690	-1473.4046	6.4074	-0.2640
1.2 Dead+1.0 Wind 30 deg+1.0 Ice	142.5814	5.5272	-9.7392	-1274.0770	-720.8032	-0.6011
1.2 Dead+1.0 Wind 60 deg+1.0 Ice	142.5814	9.6879	-5.5770	-733.0341	-1262.1184	-0.7952
1.2 Dead+1.0 Wind 90 deg+1.0 Ice	142.5814	11.2531	0.1197	7.1608	-1466.5752	-0.6714
1.2 Dead+1.0 Wind 120 deg+1.0 Ice	142.5814	9.7451	5.7551	738.4901	-1271.2490	-0.4385
1.2 Dead+1.0 Wind 150 deg+1.0 Ice	142.5814	5.6769	9.8207	1265.1886	-743.6971	-0.0758
1.2 Dead+1.0 Wind 180 deg+1.0 Ice	142.5814	0.1000	11.2897	1454.8816	-19.8852	0.3227
1.2 Dead+1.0 Wind 210 deg+1.0 Ice	142.5814	-5.5099	9.7872	1259.3852	708.8554	0.6580
1.2 Dead+1.0 Wind 240 deg+1.0 Ice	142.5814	-9.6749	5.6080	715.9556	1250.7739	0.7414
1.2 Dead+1.0 Wind 270 deg+1.0 Ice	142.5814	-11.2390	-0.1029	-26.2224	1455.0767	0.8550
1.2 Dead+1.0 Wind 300 deg+1.0 Ice	142.5814	-9.7627	-5.7120	-753.8704	1264.1814	0.5953
1.2 Dead+1.0 Wind 330 deg+1.0 Ice	142.5814	-5.6706	-9.7983	-1283.4803	733.2920	0.1539
Dead+Wind 0 deg - Service	64.2385	-0.0718	-9.3691	-1093.5386	7.4578	-0.2379
Dead+Wind 30 deg - Service	64.2385	4.5765	-8.0945	-944.4640	-533.6072	-0.4496
Dead+Wind 60 deg - Service	64.2385	8.0421	-4.6278	-540.1559	-938.1701	-0.5587
Dead+Wind 90 deg - Service	64.2385	9.3515	0.1167	12.9565	-1091.9095	-0.4196
Dead+Wind 120 deg - Service	64.2385	8.0978	4.8035	558.2740	-946.3930	-0.2307
Dead+Wind 150 deg - Service	64.2385	4.7251	8.1741	949.3072	-554.6701	0.0297
Dead+Wind 180 deg - Service	64.2385	0.0982	9.3888	1089.6017	-16.6657	0.2952
Dead+Wind 210 deg - Service	64.2385	-4.5613	8.1405	943.9878	525.8661	0.5021
Dead+Wind 240 deg - Service	64.2385	-8.0288	4.6594	537.7898	930.6866	0.5043
Dead+Wind 270 deg - Service	64.2385	-9.3383	-0.1031	-17.6822	1084.4406	0.5985
Dead+Wind 300 deg - Service	64.2385	-8.1157	-4.7623	-559.3819	942.9972	0.3857
Dead+Wind 330 deg - Service	64.2385	-4.7194	-8.1527	-953.0058	548.1850	0.0484

Solution Summary

Load Comb.	Sum of Applied Forces			Sum of Reactions			% Error
	PX K	PY K	PZ K	PX K	PY K	PZ K	
1	0.0000	-64.2385	0.0000	0.0000	64.2385	0.0000	0.000%
2	-0.3356	-77.0862	-43.7890	0.3356	77.0862	43.7890	0.000%
3	-0.3356	-57.8146	-43.7890	0.3356	57.8146	43.7890	0.000%
4	21.3894	-77.0862	-37.8316	-21.3894	77.0862	37.8316	0.000%
5	21.3894	-57.8146	-37.8316	-21.3894	57.8146	37.8316	0.000%
6	37.5867	-77.0862	-21.6290	-37.5867	77.0862	21.6290	0.000%
7	37.5867	-57.8146	-21.6290	-37.5867	57.8146	21.6290	0.000%
8	43.7065	-77.0862	0.5453	-43.7065	77.0862	-0.5453	0.000%
9	43.7065	-57.8146	0.5453	-43.7065	57.8146	-0.5453	0.000%
10	37.8472	-77.0862	22.4505	-37.8472	77.0862	-22.4505	0.000%
11	37.8472	-57.8146	22.4505	-37.8472	57.8146	-22.4505	0.000%
12	22.0838	-77.0862	38.2037	-22.0838	77.0862	-38.2037	0.000%

Load Comb.	Sum of Applied Forces			Sum of Reactions			% Error
	PX K	PY K	PZ K	PX K	PY K	PZ K	
13	22.0838	-57.8146	38.2037	-22.0838	57.8146	-38.2037	0.000%
14	0.4591	-77.0862	43.8807	-0.4591	77.0862	-43.8807	0.000%
15	0.4591	-57.8146	43.8807	-0.4591	57.8146	-43.8807	0.000%
16	-21.3182	-77.0862	38.0467	21.3182	77.0862	-38.0467	0.000%
17	-21.3182	-57.8146	38.0467	21.3182	57.8146	-38.0467	0.000%
18	-37.5247	-77.0862	21.7767	37.5247	77.0862	-21.7767	0.000%
19	-37.5247	-57.8146	21.7767	37.5247	57.8146	-21.7767	0.000%
20	-43.6450	-77.0862	-0.4818	43.6450	77.0862	0.4818	0.000%
21	-43.6450	-57.8146	-0.4818	43.6450	57.8146	0.4818	0.000%
22	-37.9310	-77.0862	-22.2579	37.9310	77.0862	22.2579	0.000%
23	-37.9310	-57.8146	-22.2579	37.9310	57.8146	22.2579	0.000%
24	-22.0574	-77.0862	-38.1035	22.0574	77.0862	38.1035	0.000%
25	-22.0574	-57.8146	-38.1035	22.0574	57.8146	38.1035	0.000%
26	0.0000	-142.5814	0.0000	-0.0000	142.5814	0.0000	0.000%
27	-0.0718	-142.5814	-11.2690	0.0718	142.5814	11.2690	0.000%
28	5.5272	-142.5814	-9.7392	-5.5272	142.5814	9.7392	0.000%
29	9.6879	-142.5814	-5.5770	-9.6879	142.5814	5.5770	0.000%
30	11.2531	-142.5814	0.1197	-11.2531	142.5814	-0.1197	0.000%
31	9.7451	-142.5814	5.7551	-9.7451	142.5814	-5.7551	0.000%
32	5.6769	-142.5814	9.8207	-5.6769	142.5814	-9.8207	0.000%
33	0.1000	-142.5814	11.2897	-0.1000	142.5814	-11.2897	0.000%
34	-5.5099	-142.5814	9.7872	5.5099	142.5814	-9.7872	0.000%
35	-9.6749	-142.5814	5.6080	9.6749	142.5814	-5.6080	0.000%
36	-11.2390	-142.5814	-0.1029	11.2390	142.5814	0.1029	0.000%
37	-9.7627	-142.5814	-5.7119	9.7627	142.5814	5.7120	0.000%
38	-5.6706	-142.5814	-9.7983	5.6706	142.5814	9.7983	0.000%
39	-0.0718	-64.2385	-9.3691	0.0718	64.2385	9.3691	0.000%
40	4.5765	-64.2385	-8.0945	-4.5765	64.2385	8.0945	0.000%
41	8.0421	-64.2385	-4.6278	-8.0421	64.2385	4.6278	0.000%
42	9.3515	-64.2385	0.1167	-9.3515	64.2385	-0.1167	0.000%
43	8.0978	-64.2385	4.8035	-8.0978	64.2385	-4.8035	0.000%
44	4.7251	-64.2385	8.1741	-4.7251	64.2385	-8.1741	0.000%
45	0.0982	-64.2385	9.3888	-0.0982	64.2385	-9.3888	0.000%
46	-4.5613	-64.2385	8.1405	4.5613	64.2385	-8.1405	0.000%
47	-8.0288	-64.2385	4.6594	8.0288	64.2385	-4.6594	0.000%
48	-9.3383	-64.2385	-0.1031	9.3383	64.2385	0.1031	0.000%
49	-8.1157	-64.2385	-4.7623	8.1157	64.2385	4.7623	0.000%
50	-4.7194	-64.2385	-8.1527	4.7194	64.2385	8.1527	0.000%

Non-Linear Convergence Results

Load Combination	Converged?	Number of Cycles	Displacement Tolerance	Force Tolerance
1	Yes	4	0.00000001	0.00000196
2	Yes	5	0.00000001	0.00080886
3	Yes	5	0.00000001	0.00036335
4	Yes	6	0.00000001	0.00071275
5	Yes	6	0.00000001	0.00021604
6	Yes	6	0.00000001	0.00075804
7	Yes	6	0.00000001	0.00023185
8	Yes	5	0.00000001	0.00023518
9	Yes	5	0.00000001	0.00008513
10	Yes	6	0.00000001	0.00075235
11	Yes	6	0.00000001	0.00022581
12	Yes	6	0.00000001	0.00075660
13	Yes	6	0.00000001	0.00022756
14	Yes	5	0.00000001	0.00028351
15	Yes	5	0.00000001	0.00010381
16	Yes	6	0.00000001	0.00075182
17	Yes	6	0.00000001	0.00023014
18	Yes	6	0.00000001	0.00071351
19	Yes	6	0.00000001	0.00021632
20	Yes	6	0.00000001	0.00007089
21	Yes	5	0.00000001	0.00070962
22	Yes	6	0.00000001	0.00077438

23	Yes	6	0.00000001	0.00023386
24	Yes	6	0.00000001	0.00075341
25	Yes	6	0.00000001	0.00022693
26	Yes	4	0.00000001	0.00017250
27	Yes	6	0.00000001	0.00023600
28	Yes	6	0.00000001	0.00099617
29	Yes	7	0.00000001	0.00015155
30	Yes	6	0.00000001	0.00025217
31	Yes	7	0.00000001	0.00013981
32	Yes	7	0.00000001	0.00014455
33	Yes	6	0.00000001	0.00022666
34	Yes	7	0.00000001	0.00014189
35	Yes	6	0.00000001	0.00093807
36	Yes	6	0.00000001	0.00029291
37	Yes	7	0.00000001	0.00015393
38	Yes	7	0.00000001	0.00014497
39	Yes	5	0.00000001	0.00004830
40	Yes	5	0.00000001	0.00021952
41	Yes	5	0.00000001	0.00025768
42	Yes	5	0.00000001	0.00005106
43	Yes	5	0.00000001	0.00023968
44	Yes	5	0.00000001	0.00024506
45	Yes	5	0.00000001	0.00004545
46	Yes	5	0.00000001	0.00024950
47	Yes	5	0.00000001	0.00021510
48	Yes	5	0.00000001	0.00007056
49	Yes	5	0.00000001	0.00026141
50	Yes	5	0.00000001	0.00024288

Maximum Tower Deflections - Service Wind

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L1	160 - 155	24.6756	50	1.5841	0.0082
L2	155 - 150	23.0173	50	1.5823	0.0079
L3	150 - 146	21.3718	50	1.5562	0.0063
L4	146 - 141	20.0847	50	1.5140	0.0050
L5	141 - 136	18.5216	50	1.4689	0.0044
L6	136 - 131	17.0146	50	1.4077	0.0038
L7	131 - 126	15.5791	50	1.3325	0.0033
L8	126 - 121	14.2306	50	1.2412	0.0028
L9	121 - 120.1	12.9852	50	1.1355	0.0021
L10	120.1 - 119.85	12.7731	50	1.1154	0.0020
L11	119.85 - 117.5	12.7148	50	1.1124	0.0020
L12	117.5 - 117.25	12.1744	50	1.0835	0.0019
L13	117.25 - 115.5	12.1177	50	1.0804	0.0019
L14	115.5 - 115.25	11.7256	50	1.0590	0.0018
L15	115.25 - 110.25	11.6703	50	1.0566	0.0018
L16	110.25 - 103.75	10.5904	50	1.0054	0.0016
L17	107.5 - 102.5	10.0199	50	0.9756	0.0015
L18	102.5 - 100.5	9.0138	50	0.9405	0.0014
L19	100.5 - 100.25	8.6247	50	0.9173	0.0013
L20	100.25 - 98.5	8.5768	50	0.9142	0.0013
L21	98.5 - 98.25	8.2457	50	0.8923	0.0012
L22	98.25 - 93.25	8.1991	50	0.8892	0.0012
L23	93.25 - 90.5	7.3009	50	0.8261	0.0011
L24	90.5 - 90.25	6.8352	50	0.7912	0.0010
L25	90.25 - 85.25	6.7938	50	0.7882	0.0010
L26	85.25 - 83.5	6.0006	50	0.7268	0.0009
L27	83.5 - 83.25	5.7381	50	0.7053	0.0008
L28	83.25 - 80.75	5.7013	50	0.7029	0.0008
L29	80.75 - 80.5	5.3394	50	0.6795	0.0008
L30	80.5 - 80.25	5.3038	50	0.6774	0.0008
L31	80.25 - 77.5	5.2684	50	0.6753	0.0008
L32	77.5 - 77.25	4.8865	50	0.6511	0.0007
L33	77.25 - 68.5	4.8525	50	0.6481	0.0007
L34	73 - 68	4.2983	50	0.5972	0.0006

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L35	68 - 64.25	3.6884	50	0.5649	0.0006
L36	64.25 - 64	3.2620	50	0.5210	0.0005
L37	64 - 60.5	3.2347	50	0.5185	0.0005
L38	60.5 - 60.25	2.8676	50	0.4832	0.0005
L39	60.25 - 60.1	2.8424	50	0.4809	0.0005
L40	60.1 - 59.85	2.8273	50	0.4795	0.0005
L41	59.85 - 59.1	2.8022	50	0.4772	0.0005
L42	59.1 - 58.85	2.7278	50	0.4706	0.0005
L43	58.85 - 55.4	2.7032	50	0.4685	0.0005
L44	55.4 - 55.15	2.3753	50	0.4391	0.0004
L45	55.15 - 54.75	2.3524	50	0.4370	0.0004
L46	54.75 - 54.5	2.3159	50	0.4336	0.0004
L47	54.5 - 49.5	2.2933	50	0.4311	0.0004
L48	49.5 - 44.5	1.8692	44	0.3789	0.0003
L49	44.5 - 41.3	1.4999	44	0.3266	0.0003
L50	41.3 - 41.05	1.2923	44	0.2930	0.0002
L51	41.05 - 34	1.2770	44	0.2906	0.0002
L52	39 - 33	1.1564	44	0.2712	0.0002
L53	33 - 31.5	0.8316	44	0.2429	0.0002
L54	31.5 - 31.25	0.7570	44	0.2318	0.0002
L55	31.25 - 30.5	0.7449	44	0.2300	0.0002
L56	30.5 - 30.25	0.7092	44	0.2244	0.0002
L57	30.25 - 25.75	0.6975	44	0.2225	0.0002
L58	25.75 - 25.5	0.5044	44	0.1874	0.0001
L59	25.5 - 24.7	0.4947	44	0.1854	0.0001
L60	24.7 - 24.45	0.4641	44	0.1791	0.0001
L61	24.45 - 24	0.4548	44	0.1769	0.0001
L62	24 - 23.75	0.4383	44	0.1729	0.0001
L63	23.75 - 18.75	0.4293	44	0.1712	0.0001
L64	18.75 - 14.1	0.2690	44	0.1352	0.0001
L65	14.1 - 13.8	0.1537	44	0.1016	0.0001
L66	13.8 - 13.65	0.1473	44	0.0995	0.0001
L67	13.65 - 10.5	0.1442	44	0.0985	0.0001
L68	10.5 - 10.25	0.0865	44	0.0765	0.0001
L69	10.25 - 5.25	0.0825	44	0.0748	0.0001
L70	5.25 - 3	0.0226	44	0.0398	0.0000
L71	3 - 2.9	0.0076	44	0.0239	0.0000
L72	2.9 - 2.75	0.0071	44	0.0232	0.0000
L73	2.75 - 2.65	0.0064	44	0.0220	0.0000
L74	2.65 - 2.5	0.0059	44	0.0212	0.0000
L75	2.5 - 2.25	0.0053	44	0.0201	0.0000
L76	2.25 - 1.9	0.0043	44	0.0181	0.0000
L77	1.9 - 1.65	0.0031	44	0.0154	0.0000
L78	1.65 - 0	0.0023	44	0.0134	0.0000

Critical Deflections and Radius of Curvature - Service Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
156.0000	Lightning Rod	50	23.3486	1.5838	0.0084	23325
148.0000	(2) PCS 1900MHz 4x45W- 65MHz	50	20.7243	1.5356	0.0060	6267
146.0000	APXVTM14-C-120 w/ Mount Pipe	50	20.0847	1.5140	0.0054	5925
139.0000	APXV18-206517S-C	50	17.9113	1.4468	0.0043	4886
132.0000	BXA-80080-6CF-EDIN-X w/ Mount Pipe	50	15.8597	1.3489	0.0034	3577
129.0000	HORIZON COMPACT	50	15.0284	1.2973	0.0031	3210
127.0000	VHLP800-11	50	14.4925	1.2601	0.0029	2998

Maximum Tower Deflections - Design Wind

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L1	160 - 155	115.6617	12	7.4288	0.0365
L2	155 - 150	107.9296	12	7.4212	0.0350
L3	150 - 146	100.2531	12	7.3033	0.0278
L4	146 - 141	94.2425	12	7.1085	0.0236
L5	141 - 136	86.9377	12	6.8983	0.0208
L6	136 - 131	79.8895	12	6.6112	0.0182
L7	131 - 126	73.1708	12	6.2587	0.0158
L8	126 - 121	66.8541	12	5.8326	0.0130
L9	121 - 120.1	61.0157	12	5.3387	0.0100
L10	120.1 - 119.85	60.0207	12	5.2444	0.0095
L11	119.85 - 117.5	59.7471	12	5.2304	0.0094
L12	117.5 - 117.25	57.2119	12	5.0949	0.0088
L13	117.25 - 115.5	56.9461	12	5.0805	0.0087
L14	115.5 - 115.25	55.1064	12	4.9800	0.0083
L15	115.25 - 110.25	54.8465	12	4.9687	0.0082
L16	110.25 - 103.75	49.7783	12	4.7288	0.0073
L17	107.5 - 102.5	47.1000	12	4.5887	0.0068
L18	102.5 - 100.5	42.3756	12	4.4240	0.0063
L19	100.5 - 100.25	40.5484	12	4.3151	0.0060
L20	100.25 - 98.5	40.3232	12	4.3002	0.0060
L21	98.5 - 98.25	38.7683	12	4.1974	0.0057
L22	98.25 - 93.25	38.5493	12	4.1830	0.0057
L23	93.25 - 90.5	34.3299	12	3.8866	0.0049
L24	90.5 - 90.25	32.1414	12	3.7225	0.0046
L25	90.25 - 85.25	31.9471	12	3.7084	0.0046
L26	85.25 - 83.5	28.2190	12	3.4196	0.0040
L27	83.5 - 83.25	26.9854	12	3.3184	0.0038
L28	83.25 - 80.75	26.8121	12	3.3075	0.0038
L29	80.75 - 80.5	25.1108	12	3.1970	0.0036
L30	80.5 - 80.25	24.9438	12	3.1875	0.0035
L31	80.25 - 77.5	24.7773	12	3.1774	0.0035
L32	77.5 - 77.25	22.9816	12	3.0634	0.0033
L33	77.25 - 68.5	22.8218	12	3.0493	0.0033
L34	73 - 68	20.2161	12	2.8098	0.0029
L35	68 - 64.25	17.3480	12	2.6583	0.0027
L36	64.25 - 64	15.3426	12	2.4514	0.0024
L37	64 - 60.5	15.2147	12	2.4397	0.0024
L38	60.5 - 60.25	13.4880	12	2.2738	0.0022
L39	60.25 - 60.1	13.3693	12	2.2627	0.0021
L40	60.1 - 59.85	13.2983	12	2.2561	0.0021
L41	59.85 - 59.1	13.1805	12	2.2456	0.0021
L42	59.1 - 58.85	12.8304	12	2.2142	0.0021
L43	58.85 - 55.4	12.7148	12	2.2044	0.0021
L44	55.4 - 55.15	11.1726	12	2.0662	0.0019
L45	55.15 - 54.75	11.0647	12	2.0563	0.0019
L46	54.75 - 54.5	10.8931	12	2.0404	0.0019
L47	54.5 - 49.5	10.7867	12	2.0282	0.0019
L48	49.5 - 44.5	8.7921	12	1.7827	0.0016
L49	44.5 - 41.3	7.0548	12	1.5365	0.0013
L50	41.3 - 41.05	6.0783	12	1.3783	0.0011
L51	41.05 - 34	6.0064	12	1.3671	0.0011
L52	39 - 33	5.4391	12	1.2760	0.0010
L53	33 - 31.5	3.9111	12	1.1425	0.0009
L54	31.5 - 31.25	3.5604	12	1.0905	0.0009
L55	31.25 - 30.5	3.5035	12	1.0817	0.0009
L56	30.5 - 30.25	3.3356	12	1.0557	0.0008
L57	30.25 - 25.75	3.2806	12	1.0467	0.0008
L58	25.75 - 25.5	2.3723	12	0.8813	0.0007
L59	25.5 - 24.7	2.3264	12	0.8720	0.0007
L60	24.7 - 24.45	2.1828	12	0.8425	0.0006
L61	24.45 - 24	2.1389	12	0.8321	0.0006
L62	24 - 23.75	2.0614	12	0.8134	0.0006
L63	23.75 - 18.75	2.0190	12	0.8051	0.0006
L64	18.75 - 14.1	1.2648	12	0.6359	0.0005
L65	14.1 - 13.8	0.7225	12	0.4780	0.0003
L66	13.8 - 13.65	0.6928	12	0.4681	0.0003

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L67	13.65 - 10.5	0.6782	12	0.4632	0.0003
L68	10.5 - 10.25	0.4067	12	0.3599	0.0003
L69	10.25 - 5.25	0.3881	12	0.3518	0.0003
L70	5.25 - 3	0.1062	12	0.1870	0.0001
L71	3 - 2.9	0.0357	12	0.1123	0.0001
L72	2.9 - 2.75	0.0334	12	0.1088	0.0001
L73	2.75 - 2.65	0.0301	12	0.1034	0.0001
L74	2.65 - 2.5	0.0279	12	0.0998	0.0001
L75	2.5 - 2.25	0.0249	12	0.0945	0.0001
L76	2.25 - 1.9	0.0202	12	0.0853	0.0001
L77	1.9 - 1.65	0.0144	12	0.0724	0.0000
L78	1.65 - 0	0.0109	12	0.0628	0.0000

Critical Deflections and Radius of Curvature - Design Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
156.0000	Lightning Rod	12	109.4746	7.4281	0.0401	5374
148.0000	(2) PCS 1900MHz 4x45W-65MHz	12	97.2300	7.2086	0.0286	1401
146.0000	APXVTM14-C-120 w/ Mount Pipe	12	94.2425	7.1085	0.0259	1319
139.0000	APXV18-206517S-C	12	84.0842	6.7946	0.0206	1077
132.0000	BXA-80080-6CF-EDIN-X w/ Mount Pipe	12	74.4847	6.3351	0.0163	783
129.0000	HORIZON COMPACT	12	70.5917	6.0946	0.0147	701
127.0000	VHLP800-11	12	68.0816	5.9209	0.0135	654

Compression Checks

Pole Design Data

Section No.	Elevation ft	Size	L ft	L _u ft	Kl/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
L1	160 - 155 (1)	TP16x16x0.375	5.0000	0.0000	0.0	18.4078	-2.5776	579.8450	0.004
L2	155 - 150 (2)	TP16x16x0.375	5.0000	0.0000	0.0	18.4078	-3.0420	579.8450	0.005
L3	150 - 146 (3)	TP16x16x0.375	4.0000	0.0000	0.0	18.4078	-4.3736	579.8450	0.008
L4	146 - 141 (4)	TP22.924x22x0.25	5.0000	0.0000	0.0	18.2526	-8.2050	1239.9700	0.007
L5	141 - 136 (5)	TP23.848x22.924x0.25	5.0000	0.0000	0.0	18.9964	-8.9401	1274.1200	0.007
L6	136 - 131 (6)	TP24.7721x23.848x0.25	5.0000	0.0000	0.0	19.7403	-12.8525	1306.9900	0.010
L7	131 - 126 (7)	TP25.6961x24.7721x0.25	5.0000	0.0000	0.0	20.4841	-13.6450	1338.5700	0.010
L8	126 - 121 (8)	TP26.6201x25.6961x0.25	5.0000	0.0000	0.0	21.2279	-14.4858	1368.8800	0.011
L9	121 - 120.1 (9)	TP26.7864x26.6201x0.25	0.9000	0.0000	0.0	21.3618	-14.6454	1374.2000	0.011
L10	120.1 - 119.85 (10)	TP26.8326x26.7864x0.4875	0.2500	0.0000	0.0	41.3553	-14.7218	2813.8100	0.005
L11	119.85 - 117.5 (11)	TP27.2669x26.8326x0.4875	2.3500	0.0000	0.0	42.0370	-15.2367	2860.2000	0.005

Section No.	Elevation ft	Size	L ft	L _u ft	KI/r	A in ²	P _u K	φP _n K	Ratio P _u / φP _n
L12	117.5 - 117.25 (12)	TP27.3131x27.2669x0.5	0.2500	0.0000	0.0	43.169 1	-15.3119	2937.2300	0.005
L13	117.25 - 115.5 (13)	TP27.6365x27.3131x0.5	1.7500	0.0000	0.0	43.689 8	-15.7185	2972.6600	0.005
L14	115.5 - 115.25 (14)	TP27.6827x27.6365x0.66 25	0.2500	0.0000	0.0	57.640 9	-15.8111	3921.8900	0.004
L15	115.25 - 110.25 (15)	TP28.6068x27.6827x0.65	5.0000	0.0000	0.0	58.513 5	-17.1926	3981.2600	0.004
L16	110.25 - 103.75 (16)	TP29.808x28.6068x0.637 5	6.5000	0.0000	0.0	58.457 1	-17.9676	3977.4200	0.005
L17	103.75 - 102.5 (17)	TP29.0743x28.0824x0.71 25	5.0000	0.0000	0.0	65.069 1	-20.2943	4427.3000	0.005
L18	102.5 - 100.5 (18)	TP29.4711x29.0743x0.7	2.0000	0.0000	0.0	64.850 0	-20.9102	4412.3900	0.005
L19	100.5 - 100.25 (19)	TP29.5206x29.4711x0.63 75	0.2500	0.0000	0.0	59.289 9	-20.9983	4034.0800	0.005
L20	100.25 - 98.5 (20)	TP29.8678x29.5206x0.63 75	1.7500	0.0000	0.0	60.002 5	-21.5127	4082.5700	0.005
L21	98.5 - 98.25 (21)	TP29.9174x29.8678x0.66 25	0.2500	0.0000	0.0	62.408 0	-21.6180	4246.2400	0.005
L22	98.25 - 93.25 (22)	TP30.9093x29.9174x0.65	5.0000	0.0000	0.0	63.332 6	-23.2201	4309.1500	0.005
L23	93.25 - 90.5 (23)	TP31.4548x30.9093x0.65	2.7500	0.0000	0.0	64.474 4	-24.1163	4386.8400	0.005
L24	90.5 - 90.25 (24)	TP31.5044x31.4548x0.68 75	0.2500	0.0000	0.0	68.220 9	-24.2278	4641.7500	0.005
L25	90.25 - 85.25 (25)	TP32.4962x31.5044x0.67 5	5.0000	0.0000	0.0	69.163 5	-26.0546	4705.8800	0.006
L26	85.25 - 83.5 (26)	TP32.8434x32.4962x0.66 25	1.7500	0.0000	0.0	68.649 9	-26.6949	4670.9400	0.006
L27	83.5 - 83.25 (27)	TP32.893x32.8434x0.912 5	0.2500	0.0000	0.0	93.966 7	-26.8319	6393.4900	0.004
L28	83.25 - 80.75 (28)	TP33.3889x32.893x0.9	2.5000	0.0000	0.0	94.152 9	-27.9192	6406.1600	0.004
L29	80.75 - 80.5 (29)	TP33.4385x33.3889x1.06 25	0.2500	0.0000	0.0	110.76 60	-28.0538	7536.5500	0.004
L30	80.5 - 80.25 (30)	TP33.4881x33.4385x0.98 75	0.2500	0.0000	0.0	103.34 40	-28.1726	7031.5100	0.004
L31	80.25 - 77.5 (31)	TP34.0336x33.4881x0.96 25	2.7500	0.0000	0.0	102.49 60	-29.4675	6973.8100	0.004
L32	77.5 - 77.25 (32)	TP34.0832x34.0336x0.68 75	0.2500	0.0000	0.0	73.929 8	-29.5844	5030.1800	0.006
L33	77.25 - 68.5 (33)	TP35.819x34.0832x0.687 5	8.7500	0.0000	0.0	75.796 2	-31.3357	5157.1700	0.006
L34	68.5 - 68 (34)	TP35.2329x34.3013x0.75	5.0000	0.0000	0.0	83.276 3	-35.0668	5666.1200	0.006
L35	68 - 64.25 (35)	TP35.9317x35.2329x0.73 75	3.7500	0.0000	0.0	83.577 3	-36.7426	5686.6000	0.006
L36	64.25 - 64 (36)	TP35.9782x35.9317x0.87 5	0.2500	0.0000	0.0	98.903 4	-36.8809	6729.3900	0.005
L37	64 - 60.5 (37)	TP36.6304x35.9782x0.86 25	3.5000	0.0000	0.0	99.336 4	-38.5468	6758.8500	0.006
L38	60.5 - 60.25 (38)	TP36.677x36.6304x0.925	0.2500	0.0000	0.0	106.48 70	-38.6883	7245.3900	0.005
L39	60.25 - 60.1 (39)	TP36.7049x36.677x0.925	0.1500	0.0000	0.0	106.57 00	-38.7660	7251.0600	0.005
L40	60.1 - 59.85 (40)	TP36.7515x36.7049x0.97 5	0.2500	0.0000	0.0	112.32 00	-38.8957	7642.2700	0.005
L41	59.85 - 59.1 (41)	TP36.8912x36.7515x0.97 5	0.7500	0.0000	0.0	112.75 90	-39.2820	7672.1200	0.005
L42	59.1 - 58.85 (42)	TP36.9378x36.8912x1.05	0.2500	0.0000	0.0	121.33 70	-39.4284	8255.7500	0.005
L43	58.85 - 55.4 (43)	TP37.5806x36.9378x1.02 5	3.4500	0.0000	0.0	120.65 20	-41.3385	8209.1600	0.005
L44	55.4 - 55.15 (44)	TP37.6272x37.5806x1.02 5	0.2500	0.0000	0.0	120.80 60	-41.4908	8219.6200	0.005
L45	55.15 - 54.75 (45)	TP37.7018x37.6272x1.02 5	0.4000	0.0000	0.0	121.05 20	-41.7136	8236.3500	0.005
L46	54.75 - 54.5	TP37.7483x37.7018x0.82	0.2500	0.0000	0.0	98.086	-41.8385	6673.8300	0.006

Section No.	Elevation ft	Size	L ft	L _u ft	KI/r	A in ²	P _u K	φP _n K	Ratio P _u / φP _n
L47	(46) 54.5 - 49.5	5 TP38.68x37.7483x0.8125	5.0000	0.0000	0.0	8 99.070	-44.3023	6740.7700	0.007
L48	(47) 49.5 - 44.5	7 TP39.6116x38.68x0.8	5.0000	0.0000	0.0	7 99.978	-46.8080	6802.5500	0.007
L49	(48) 44.5 - 41.3	6 TP40.2078x39.6116x0.78	3.2000	0.0000	0.0	6 99.960	-48.4295	6801.2900	0.007
L50	(49) 41.3 - 41.05	75 TP40.2544x40.2078x0.87	0.2500	0.0000	0.0	1 110.95	-48.5816	7549.1400	0.006
L51	(50) 41.05 - 34	5 TP41.568x40.2544x0.875	7.0500	0.0000	0.0	10 112.02	-49.6990	7622.3600	0.007
L52	(51) 34 - 33 (52)	5 TP40.9962x39.8864x1.17	6.0000	0.0000	0.0	80 150.66	-55.9156	11105.4000	0.005
L53	33 - 31.5 (53)	5 TP41.2736x40.9962x1.17	1.5000	0.0000	0.0	30 151.71	-56.8823	11182.8000	0.005
L54	(54) 31.5 - 31.25	5 TP41.3199x41.2736x1.17	0.2500	0.0000	0.0	80 151.88	-57.0620	11195.7000	0.005
L55	(55) 31.25 - 30.5	5 TP41.4586x41.3199x1.17	0.7500	0.0000	0.0	30 152.41	-57.5485	11234.4000	0.005
L56	(56) 30.5 - 30.25	5 TP41.5048x41.4586x1.12	0.2500	0.0000	0.0	60 146.27	-57.7159	10782.0000	0.005
L57	(57) 30.25 - 25.75	5 TP42.3372x41.5048x1.1	4.5000	0.0000	0.0	20 146.06	-60.6053	10766.2000	0.006
L58	(58) 25.75 - 25.5	5 TP42.3834x42.3372x1.07	0.2500	0.0000	0.0	90 142.98	-60.7773	10539.7000	0.006
L59	(59) 25.5 - 24.7	5 TP42.5314x42.3834x1.07	0.8000	0.0000	0.0	10 143.50	-61.2831	10577.5000	0.006
L60	(60) 24.7 - 24.45	5 TP42.5776x42.5314x0.95	0.2500	0.0000	0.0	90 127.33	-61.4299	9386.1500	0.007
L61	(61) 24.45 - 24	5 TP42.6608x42.5776x0.95	0.4500	0.0000	0.0	30 127.59	-61.6785	9404.9200	0.007
L62	(62) 24 - 23.75	5 TP42.7071x42.6608x1.2	0.2500	0.0000	0.0	30 160.38	-61.8433	11821.9000	0.005
L63	(63) 23.75 - 18.75	5 TP43.6319x42.7071x1.17	5.0000	0.0000	0.0	60 160.63	-65.0500	11840.5000	0.005
L64	(64) 18.75 - 14.1	5 TP44.492x43.6319x1.15	4.6500	0.0000	0.0	50 160.49	-68.0648	11830.1000	0.006
L65	(65) 14.1 - 13.8	5 TP44.5475x44.492x1.175	0.3000	0.0000	0.0	00 164.10	-68.2752	12095.8000	0.006
L66	(66) 13.8 - 13.65	5 TP44.5752x44.5475x1.17	0.1500	0.0000	0.0	50 164.20	-68.3769	12103.5000	0.006
L67	(67) 13.65 - 10.5	5 TP45.1579x44.5752x1.17	3.1500	0.0000	0.0	90 166.40	-70.4584	12266.0000	0.006
L68	(68) 10.5 - 10.25	5 TP45.2041x45.1579x1.17	0.2500	0.0000	0.0	40 166.58	-70.6306	12278.9000	0.006
L69	(69) 10.25 - 5.25	5 TP46.1289x45.2041x1.15	5.0000	0.0000	0.0	70 166.55	-73.8655	12276.9000	0.006
L70	(70) 5.25 - 3	5 TP46.5451x46.1289x1.12	2.2500	0.0000	0.0	40 164.53	-75.3372	12127.8000	0.006
L71	(71) 3 - 2.9	75 TP46.5636x46.5451x1.08	0.1000	0.0000	0.0	60 159.24	-75.4136	11738.0000	0.006
L72	(72) 2.9 - 2.75	5 TP46.5913x46.5636x1.02	0.1500	0.0000	0.0	20 150.39	-75.5012	11085.4000	0.007
L73	(73) 2.75 - 2.65	5 TP46.6098x46.5913x1.02	0.1000	0.0000	0.0	30 150.45	-75.5609	11089.9000	0.007
L74	(74) 2.65 - 2.5	5 TP46.6376x46.6098x1.02	0.1500	0.0000	0.0	40 150.54	-75.6486	11096.6000	0.007
L75	(75) 2.5 - 2.25	5 TP46.6838x46.6376x1	0.2500	0.0000	0.0	20 147.10	-75.7967	10842.9000	0.007
L76	(76) 2.25 - 1.9	5 TP46.7486x46.6838x1	0.3500	0.0000	0.0	00 147.31	-76.0048	10858.2000	0.007
L77	(77) 1.9 - 1.65	5 TP46.7948x46.7486x0.95	0.2500	0.0000	0.0	90 140.23	-76.1477	10337.0000	0.007
L78	(78) 1.65 - 0	5 TP47.1x46.7948x0.95	1.6500	0.0000	0.0	30 141.17	-77.0619	10405.9000	0.007

Pole Bending Design Data

Section No.	Elevation ft	Size	M_{ux}	ϕM_{nx}	Ratio	M_{uy}	ϕM_{ny}	Ratio
			kip-ft	kip-ft	$\frac{M_{ux}}{\phi M_{nx}}$	kip-ft	kip-ft	$\frac{M_{uy}}{\phi M_{ny}}$
L1	160 - 155 (1)	TP16x16x0.375	20.4191	240.3717	0.085	0.0000	240.3717	0.000
L2	155 - 150 (2)	TP16x16x0.375	73.9729	240.3717	0.308	0.0000	240.3717	0.000
L3	150 - 146 (3)	TP16x16x0.375	121.2917	240.3717	0.505	0.0000	240.3717	0.000
L4	146 - 141 (4)	TP22.924x22x0.25	211.8167	571.0217	0.371	0.0000	571.0217	0.000
L5	141 - 136 (5)	TP23.848x22.924x0.25	305.4583	610.9208	0.500	0.0000	610.9208	0.000
L6	136 - 131 (6)	TP24.7721x23.848x0.25	415.7642	651.4767	0.638	0.0000	651.4767	0.000
L7	131 - 126 (7)	TP25.6961x24.7721x0.25	552.5908	692.6158	0.798	0.0000	692.6158	0.000
L8	126 - 121 (8)	TP26.6201x25.6961x0.25	695.7158	734.2658	0.947	0.0000	734.2658	0.000
L9	121 - 120.1 (9)	TP26.7864x26.6201x0.25	721.7650	741.8117	0.973	0.0000	741.8117	0.000
L10	120.1 - 119.85 (10)	TP26.8326x26.7864x0.48 75	729.0175	1494.5417	0.488	0.0000	1494.5417	0.000
L11	119.85 - 117.5 (11)	TP27.2669x26.8326x0.48 75	797.5667	1544.6750	0.516	0.0000	1544.6750	0.000
L12	117.5 - 117.25 (12)	TP27.3131x27.2669x0.5	804.9008	1587.5833	0.507	0.0000	1587.5833	0.000
L13	117.25 - 115.5 (13)	TP27.6365x27.3131x0.5	856.4583	1626.4667	0.527	0.0000	1626.4667	0.000
L14	115.5 - 115.25 (14)	TP27.6827x27.6365x0.66 25	863.8583	2123.9250	0.407	0.0000	2123.9250	0.000
L15	115.25 - 110.25 (15)	TP28.6068x27.6827x0.65	1013.5667	2233.5750	0.454	0.0000	2233.5750	0.000
L16	110.25 - 103.75 (16)	TP29.808x28.6068x0.637 5	1097.3417	2274.9083	0.482	0.0000	2274.9083	0.000
L17	103.75 - 102.5 (17)	TP29.0743x28.0824x0.71 25	1252.5667	2515.2000	0.498	0.0000	2515.2000	0.000
L18	102.5 - 100.5 (18)	TP29.4711x29.0743x0.7	1315.7000	2544.8667	0.517	0.0000	2544.8667	0.000
L19	100.5 - 100.25 (19)	TP29.5206x29.4711x0.63 75	1323.6500	2340.9000	0.565	0.0000	2340.9000	0.000
L20	100.25 - 98.5 (20)	TP29.8678x29.5206x0.63 75	1379.5333	2398.1250	0.575	0.0000	2398.1250	0.000
L21	98.5 - 98.25 (21)	TP29.9174x29.8678x0.66 25	1387.5500	2494.3250	0.556	0.0000	2494.3250	0.000
L22	98.25 - 93.25 (22)	TP30.9093x29.9174x0.65	1549.5500	2621.1667	0.591	0.0000	2621.1667	0.000
L23	93.25 - 90.5 (23)	TP31.4548x30.9093x0.65	1640.0250	2717.5417	0.603	0.0000	2717.5417	0.000
L24	90.5 - 90.25 (24)	TP31.5044x31.4548x0.68 75	1648.3000	2873.1833	0.574	0.0000	2873.1833	0.000
L25	90.25 - 85.25 (25)	TP32.4962x31.5044x0.67 5	1815.4917	3011.0417	0.603	0.0000	3011.0417	0.000
L26	85.25 - 83.5 (26)	TP32.8434x32.4962x0.66 25	1874.7917	3024.3167	0.620	0.0000	3024.3167	0.000
L27	83.5 - 83.25 (27)	TP32.893x32.8434x0.912 5	1883.2917	4082.0667	0.461	0.0000	4082.0667	0.000
L28	83.25 - 80.75 (28)	TP33.3889x32.893x0.9	1968.8167	4158.5417	0.473	0.0000	4158.5417	0.000
L29	80.75 - 80.5 (29)	TP33.4385x33.3889x1.06 25	1977.4167	4851.1833	0.408	0.0000	4851.1833	0.000
L30	80.5 - 80.25 (30)	TP33.4881x33.4385x0.98 75	1986.0250	4554.2417	0.436	0.0000	4554.2417	0.000
L31	80.25 - 77.5 (31)	TP34.0336x33.4881x0.96 25	2081.3333	4601.8750	0.452	0.0000	4601.8750	0.000
L32	77.5 - 77.25 (32)	TP34.0832x34.0336x0.68 75	2090.0500	3379.8667	0.618	0.0000	3379.8667	0.000
L33	77.25 - 68.5 (33)	TP35.819x34.0832x0.687 5	2239.5000	3554.4417	0.630	0.0000	3554.4417	0.000
L34	68.5 - 68 (34)	TP35.2329x34.3013x0.75	2418.7750	3926.6333	0.616	0.0000	3926.6333	0.000
L35	68 - 64.25 (35)	TP35.9317x35.2329x0.73 75	2555.6000	4025.2417	0.635	0.0000	4025.2417	0.000
L36	64.25 - 64 (36)	TP35.9782x35.9317x0.87 5	2564.7833	4732.6583	0.542	0.0000	4732.6583	0.000
L37	64 - 60.5 (37)	TP36.6304x35.9782x0.86 25	2694.2333	4847.2167	0.556	0.0000	4847.2167	0.000
L38	60.5 - 60.25	TP36.677x36.6304x0.925	2703.5417	5184.9333	0.521	0.0000	5184.9333	0.000

Section No.	Elevation ft	Size	M_{ux} kip-ft	ϕM_{nx} kip-ft	Ratio $\frac{M_{ux}}{\phi M_{nx}}$	M_{uy} kip-ft	ϕM_{ny} kip-ft	Ratio $\frac{M_{uy}}{\phi M_{ny}}$
L39	(38) 60.25 - 60.1	TP36.7049x36.677x0.925	2709.1333	5193.1500	0.522	0.0000	5193.1500	0.000
L40	(39) 60.1 - 59.85	TP36.7515x36.7049x0.97	2718.4500	5465.3500	0.497	0.0000	5465.3500	0.000
L41	(40) 59.85 - 59.1	TP36.8912x36.7515x0.97	2746.4667	5508.7000	0.499	0.0000	5508.7000	0.000
L42	(41) 59.1 - 58.85	TP36.9378x36.8912x1.05	2755.8167	5910.9080	0.466	0.0000	5910.9080	0.000
L43	(42) 58.85 - 55.4	TP37.5806x36.9378x1.02	2885.7833	5994.0167	0.481	0.0000	5994.0167	0.000
L44	(43) 55.4 - 55.15	TP37.6272x37.5806x1.02	2895.2667	6009.5080	0.482	0.0000	6009.5080	0.000
L45	(44) 55.15 - 54.75	TP37.7018x37.6272x1.02	2910.4500	6034.3413	0.482	0.0000	6034.3413	0.000
L46	(45) 54.75 - 54.5	TP37.7483x37.7018x0.82	2919.9500	4949.4167	0.590	0.0000	4949.4167	0.000
L47	(46) 54.5 - 49.5	TP38.68x37.7483x0.8125	3111.6250	5131.3417	0.606	0.0000	5131.3417	0.000
L48	(47) 49.5 - 44.5	TP39.6116x38.68x0.8	3306.3417	5311.8667	0.622	0.0000	5311.8667	0.000
L49	(48) 44.5 - 41.3	TP40.2078x39.6116x0.78	3432.5250	5397.5417	0.636	0.0000	5397.5417	0.000
L50	(49) 41.3 - 41.05	TP40.2544x40.2078x0.87	3442.4333	5971.6913	0.576	0.0000	5971.6913	0.000
L51	(50) 41.05 - 34	TP41.568x40.2544x0.875	3523.9583	6089.3667	0.579	0.0000	6089.3667	0.000
L52	(51) 34 - 33 (52)	TP40.9962x39.8864x1.17	3766.0167	8820.5000	0.427	0.0000	8820.5000	0.000
L53	(52) 33 - 31.5 (53)	TP41.2736x40.9962x1.17	3827.3000	8945.5833	0.428	0.0000	8945.5833	0.000
L54	(53) 31.5 - 31.25	TP41.3199x41.2736x1.17	3837.5417	8966.5833	0.428	0.0000	8966.5833	0.000
L55	(54) 31.25 - 30.5	TP41.4586x41.3199x1.17	3868.3083	9029.5000	0.428	0.0000	9029.5000	0.000
L56	(55) 30.5 - 30.25	TP41.5048x41.4586x1.12	3878.5750	8697.6667	0.446	0.0000	8697.6667	0.000
L57	(56) 30.25 - 25.75	TP42.3372x41.5048x1.1	4064.6250	8879.5833	0.458	0.0000	8879.5833	0.000
L58	(57) 25.75 - 25.5	TP42.3834x42.3372x1.07	4075.0333	8713.3333	0.468	0.0000	8713.3333	0.000
L59	(58) 25.5 - 24.7	TP42.5314x42.3834x1.07	4108.3667	8776.6667	0.468	0.0000	8776.6667	0.000
L60	(59) 24.7 - 24.45	TP42.5776x42.5314x0.95	4118.8000	7844.1167	0.525	0.0000	7844.1167	0.000
L61	(60) 24.45 - 24	TP42.6608x42.5776x0.95	4137.5917	7875.8667	0.525	0.0000	7875.8667	0.000
L62	(61) 24 - 23.75	TP42.7071x42.6608x1.2	4148.0333	9792.7500	0.424	0.0000	9792.7500	0.000
L63	(62) 23.75 - 18.75	TP43.6319x42.7071x1.17	4358.4083	10044.6667	0.434	0.0000	10044.6667	0.000
L64	(63) 18.75 - 14.1	TP44.492x43.6319x1.15	4556.3417	10256.5000	0.444	0.0000	10256.5000	0.000
L65	(64) 14.1 - 13.8	TP44.5475x44.492x1.175	4569.1917	10488.5000	0.436	0.0000	10488.5000	0.000
L66	(65) 13.8 - 13.65	TP44.5752x44.5475x1.17	4575.6083	10502.1667	0.436	0.0000	10502.1667	0.000
L67	(66) 13.65 - 10.5	TP45.1579x44.5752x1.17	4711.0250	10789.7500	0.437	0.0000	10789.7500	0.000
L68	(67) 10.5 - 10.25	TP45.2041x45.1579x1.17	4721.8167	10812.7500	0.437	0.0000	10812.7500	0.000
L69	(68) 10.25 - 5.25	TP46.1289x45.2041x1.15	4938.8250	11056.2500	0.447	0.0000	11056.2500	0.000
L70	(69) 5.25 - 3 (70)	TP46.5451x46.1289x1.12	5037.2583	11037.7500	0.456	0.0000	11037.7500	0.000
L71	(70) 3 - 2.9 (71)	TP46.5636x46.5451x1.08	5041.6417	10705.0833	0.471	0.0000	10705.0833	0.000
L72	(71) 2.9 - 2.75 (72)	TP46.5913x46.5636x1.02	5048.2250	10144.0000	0.498	0.0000	10144.0000	0.000

Section No.	Elevation ft	Size	M_{ux} kip-ft	ϕM_{nx} kip-ft	Ratio $\frac{M_{ux}}{\phi M_{nx}}$	M_{uy} kip-ft	ϕM_{ny} kip-ft	Ratio $\frac{M_{uy}}{\phi M_{ny}}$
L73	2.75 - 2.65 (73)	TP46.6098x46.5913x1.02 5	5052.6083	10152.3333	0.498	0.0000	10152.3333	0.000
L74	2.65 - 2.5 (74)	TP46.6376x46.6098x1.02 5	5059.1917	10164.8333	0.498	0.0000	10164.8333	0.000
L75	2.5 - 2.25 (75)	TP46.6838x46.6376x1	5070.1667	9953.5833	0.509	0.0000	9953.5833	0.000
L76	2.25 - 1.9 (76)	TP46.7486x46.6838x1	5085.5500	9982.0833	0.509	0.0000	9982.0833	0.000
L77	1.9 - 1.65 (77)	TP46.7948x46.7486x0.95	5096.5333	9533.5000	0.535	0.0000	9533.5000	0.000
L78	1.65 - 0 (78)	TP47.1x46.7948x0.95	5169.2083	9662.1667	0.535	0.0000	9662.1667	0.000

Pole Shear Design Data

Section No.	Elevation ft	Size	Actual V_u K	ϕV_n K	Ratio $\frac{V_u}{\phi V_n}$	Actual T_u kip-ft	ϕT_n kip-ft	Ratio $\frac{T_u}{\phi T_n}$
L1	160 - 155 (1)	TP16x16x0.375	10.5137	289.9220	0.036	0.6606	368.8675	0.002
L2	155 - 150 (2)	TP16x16x0.375	10.8618	289.9220	0.037	0.5694	368.8675	0.002
L3	150 - 146 (3)	TP16x16x0.375	12.8106	289.9220	0.044	0.5692	368.8675	0.002
L4	146 - 141 (4)	TP22.924x22x0.25	17.9330	619.9850	0.029	0.6617	1162.1750	0.001
L5	141 - 136 (5)	TP23.848x22.924x0.25	19.3797	637.0600	0.030	0.6610	1243.2000	0.001
L6	136 - 131 (6)	TP24.7721x23.848x0.25	26.8765	653.4950	0.041	1.2867	1325.5500	0.001
L7	131 - 126 (7)	TP25.6961x24.7721x0.25	28.3660	669.2870	0.042	1.0955	1409.0833	0.001
L8	126 - 121 (8)	TP26.6201x25.6961x0.25	28.9066	684.4380	0.042	1.0948	1493.6417	0.001
L9	121 - 120.1 (9)	TP26.7864x26.6201x0.25	29.0016	687.0980	0.042	1.0947	1508.9583	0.001
L10	120.1 - 119.85 (10)	TP26.8326x26.7864x0.48 75	29.0280	1406.9100	0.021	1.0947	3049.3417	0.000
L11	119.85 - 117.5 (11)	TP27.2669x26.8326x0.48 75	29.3252	1430.1000	0.021	1.0944	3151.3167	0.000
L12	117.5 - 117.25 (12)	TP27.3131x27.2669x0.5	29.3551	1468.6100	0.020	1.0945	3239.3250	0.000
L13	117.25 - 115.5 (13)	TP27.6365x27.3131x0.5	29.5853	1486.3300	0.020	1.0942	3318.4250	0.000
L14	115.5 - 115.25 (14)	TP27.6827x27.6365x0.66 25	29.6134	1960.9400	0.015	1.0943	4342.0667	0.000
L15	115.25 - 110.25 (15)	TP28.6068x27.6827x0.65	30.2825	1990.6300	0.015	1.0938	4564.3333	0.000
L16	110.25 - 103.75 (16)	TP29.808x28.6068x0.637 5	30.6529	1988.7100	0.015	1.0936	4647.4750	0.000
L17	103.75 - 102.5 (17)	TP29.0743x28.0824x0.71 25	31.4245	2213.6500	0.014	1.0933	5142.9833	0.000
L18	102.5 - 100.5 (18)	TP29.4711x29.0743x0.7	31.8065	2206.2000	0.014	0.1153	5202.2917	0.000
L19	100.5 - 100.25 (19)	TP29.5206x29.4711x0.63 75	31.8363	2017.0400	0.016	0.1153	4781.8000	0.000
L20	100.25 - 98.5 (20)	TP29.8678x29.5206x0.63 75	32.0725	2041.2800	0.016	0.1153	4898.2750	0.000
L21	98.5 - 98.25 (21)	TP29.9174x29.8678x0.66 25	32.0935	2123.1200	0.015	0.1152	5096.1583	0.000
L22	98.25 - 93.25 (22)	TP30.9093x29.9174x0.65	32.7433	2154.5800	0.015	0.1151	5353.2667	0.000
L23	93.25 - 90.5 (23)	TP31.4548x30.9093x0.65	33.1029	2193.4200	0.015	0.1150	5549.4000	0.000
L24	90.5 - 90.25 (24)	TP31.5044x31.4548x0.68 75	33.1261	2320.8700	0.014	0.1150	5869.5580	0.000
L25	90.25 - 85.25 (25)	TP32.4962x31.5044x0.67 5	33.7902	2352.9400	0.014	0.1149	6148.9833	0.000
L26	85.25 - 83.5 (26)	TP32.8434x32.4962x0.66 25	34.0302	2335.4700	0.015	0.1149	6174.8167	0.000
L27	83.5 - 83.25 (27)	TP32.893x32.8434x0.912 5	34.0491	3196.7500	0.011	0.1148	8356.1667	0.000
L28	83.25 - 80.75 (28)	TP33.3889x32.893x0.9	34.4082	3203.0800	0.011	0.1148	8510.4167	0.000
L29	80.75 - 80.5 (29)	TP33.4385x33.3889x1.06 25	34.4386	3768.2700	0.009	0.1148	9944.3333	0.000
L30	80.5 - 80.25	TP33.4881x33.4385x0.98	34.4746	3515.7600	0.010	0.1148	9328.3333	0.000

Section No.	Elevation ft	Size	Actual V_u K	ϕV_n K	Ratio $\frac{V_u}{\phi V_n}$	Actual T_u kip-ft	ϕT_n kip-ft	Ratio $\frac{T_u}{\phi T_n}$
L31	(30) 80.25 - 77.5	75 TP34.0336x33.4881x0.96	34.8775	3486.9000	0.010	0.1148	9422.0000	0.000
L32	(31) 77.5 - 77.25	25 TP34.0832x34.0336x0.68	34.9027	2515.0900	0.014	0.1148	6900.7500	0.000
L33	(32) 77.25 - 68.5	75 TP35.819x34.0832x0.687	35.4678	2578.5900	0.014	0.1147	7255.9667	0.000
L34	(33) 68.5 - 68 (34)	5 TP35.2329x34.3013x0.75	36.2676	2833.0600	0.013	0.1147	8020.1580	0.000
L35	(34) 68 - 64.25	5 TP35.9317x35.2329x0.73	36.7552	2843.3000	0.013	0.1146	8219.4167	0.000
L36	(35) 64.25 - 64	75 TP35.9782x35.9317x0.87	36.7722	3364.6900	0.011	0.1146	9676.5000	0.000
L37	(36) 64 - 60.5 (37)	5 TP36.6304x35.9782x0.86	37.2422	3379.4200	0.011	0.1146	9908.1667	0.000
L38	(37) 60.5 - 60.25	25 TP36.677x36.6304x0.925	37.2627	3622.7000	0.010	0.1146	10604.5833	0.000
L39	(38) 60.25 - 60.1	5 TP36.7049x36.677x0.925	37.2849	3625.5300	0.010	0.1146	10621.2500	0.000
L40	(39) 60.1 - 59.85	5 TP36.7515x36.7049x0.97	37.3162	3821.1400	0.010	0.1146	11183.0833	0.000
L41	(40) 59.85 - 59.1	5 TP36.8912x36.7515x0.97	37.4225	3836.0600	0.010	0.1146	11271.4160	0.000
L42	(41) 59.1 - 58.85	5 TP36.9378x36.8912x1.05	37.4515	4127.8800	0.009	0.1146	12102.6667	0.000
L43	(42) 58.85 - 55.4	5 TP37.5806x36.9378x1.02	37.9315	4104.5800	0.009	0.1145	12268.0000	0.000
L44	(43) 55.4 - 55.15	5 TP37.6272x37.5806x1.02	37.9541	4109.8100	0.009	0.1145	12299.5827	0.000
L45	(44) 55.15 - 54.75	5 TP37.7018x37.6272x1.02	38.0091	4118.1800	0.009	0.1145	12350.1667	0.000
L46	(45) 54.75 - 54.5	5 TP37.7483x37.7018x0.82	38.0401	3336.9100	0.011	0.1145	10111.1667	0.000
L47	(46) 54.5 - 49.5	5 TP38.68x37.7483x0.8125	38.6726	3370.3900	0.011	0.1145	10479.7500	0.000
L48	(47) 49.5 - 44.5	5 TP39.6116x38.68x0.8	39.2751	3401.2700	0.012	0.1145	10845.4167	0.000
L49	(48) 44.5 - 41.3	5 TP40.2078x39.6116x0.78	39.6511	3400.6400	0.012	0.1144	11018.0833	0.000
L50	(49) 41.3 - 41.05	75 TP40.2544x40.2078x0.87	39.6643	3774.5700	0.011	0.1144	12199.0827	0.000
L51	(50) 41.05 - 34	5 TP41.568x40.2544x0.875	39.9196	3811.1800	0.010	0.1144	12438.5827	0.000
L52	(51) 34 - 33 (52)	5 TP40.9962x39.8864x1.17	40.7946	5552.7000	0.007	0.1144	18061.6667	0.000
L53	(52) 33 - 31.5 (53)	5 TP41.2736x40.9962x1.17	40.9821	5591.3900	0.007	0.1144	18316.5827	0.000
L54	(53) 31.5 - 31.25	5 TP41.3199x41.2736x1.17	40.9905	5597.8300	0.007	0.1144	18359.2493	0.000
L55	(54) 31.25 - 30.5	5 TP41.4586x41.3199x1.17	41.0872	5617.1800	0.007	0.1144	18487.5827	0.000
L56	(55) 30.5 - 30.25	5 TP41.5048x41.4586x1.12	41.1079	5391.0000	0.008	0.1144	17800.5827	0.000
L57	(56) 30.25 - 25.75	5 TP42.3372x41.5048x1.1	41.6298	5383.1200	0.008	0.1144	18165.9160	0.000
L58	(57) 25.75 - 25.5	5 TP42.3834x42.3372x1.07	41.6403	5269.8600	0.008	0.1144	17822.0000	0.000
L59	(58) 25.5 - 24.7	5 TP42.5314x42.3834x1.07	41.7376	5288.7400	0.008	0.1144	17951.0000	0.000
L60	(59) 24.7 - 24.45	5 TP42.5776x42.5314x0.95	41.7528	4693.0700	0.009	0.1144	16027.2493	0.000
L61	(60) 24.45 - 24	5 TP42.6608x42.5776x0.95	41.8026	4702.4600	0.009	0.1144	16091.9160	0.000
L62	(61) 24 - 23.75	5 TP42.7071x42.6608x1.2	41.8248	5910.9300	0.007	0.1144	20048.5827	0.000
L63	(62) 23.75 - 18.75	5 TP43.6319x42.7071x1.17	42.3695	5920.2300	0.007	0.1144	20556.0827	0.000
L64	(63) 18.75 - 14.1	5 TP44.492x43.6319x1.15	42.8289	5915.0600	0.007	0.1144	20981.8333	0.000
L65	(64) 14.1 - 13.8	5 TP44.5475x44.492x1.175	42.8404	6047.9000	0.007	0.1143	21460.3333	0.000

Section No.	Elevation ft	Size	Actual V_u K	ϕV_n K	Ratio $\frac{V_u}{\phi V_n}$	Actual T_u kip-ft	ϕT_n kip-ft	Ratio $\frac{T_u}{\phi T_n}$
L66	(65) 13.8 - 13.65	TP44.5752x44.5475x1.17	42.8521	6051.7700	0.007	0.1143	21488.0827	0.000
L67	(66) 13.65 - 10.5	TP45.1579x44.5752x1.17	43.1731	6133.0100	0.007	0.1143	22074.0000	0.000
L68	(67) 10.5 - 10.25	TP45.2041x45.1579x1.17	43.1810	6139.4600	0.007	0.1143	22120.8333	0.000
L69	(68) 10.25 - 5.25	TP46.1289x45.2041x1.15	43.6725	6138.4600	0.007	0.1143	22610.7493	0.000
L70	(69) 5.25 - 3 (70)	TP46.5451x46.1289x1.12	43.8877	6063.9100	0.007	0.1143	22566.9173	0.000
L71	(71) 3 - 2.9 (71)	TP46.5636x46.5451x1.08	43.8747	5869.0100	0.007	0.1143	21880.6667	0.000
L72	(72) 2.9 - 2.75 (72)	TP46.5913x46.5636x1.02	43.8895	5542.6900	0.008	0.1143	20724.1667	0.000
L73	(73) 2.75 - 2.65 (73)	TP46.6098x46.5913x1.02	43.8973	5544.9400	0.008	0.1143	20741.1667	0.000
L74	(74) 2.65 - 2.5 (74)	TP46.6376x46.6098x1.02	43.9120	5548.3100	0.008	0.1143	20766.5827	0.000
L75	(75) 2.5 - 2.25 (75)	TP46.6838x46.6376x1	43.9368	5421.4400	0.008	0.1143	20331.0827	0.000
L76	(76) 2.25 - 1.9 (76)	TP46.7486x46.6838x1	43.9704	5429.1200	0.008	0.1143	20389.1667	0.000
L77	(77) 1.9 - 1.65 (77)	TP46.7948x46.7486x0.95	43.9900	5168.5200	0.009	0.1143	19465.6667	0.000
L78	(78) 1.65 - 0 (78)	TP47.1x46.7948x0.95	44.1696	5202.9300	0.008	0.1143	19727.5000	0.000

Pole Interaction Design Data

Section No.	Elevation ft	Ratio P_u ϕP_n	Ratio M_{ux} ϕM_{nx}	Ratio M_{uy} ϕM_{ny}	Ratio V_u ϕV_n	Ratio T_u ϕT_n	Comb. Stress Ratio	Allow. Stress Ratio	Criteria
L1	160 - 155 (1)	0.004	0.085	0.000	0.036	0.002	0.091	1.000	4.8.2
L2	155 - 150 (2)	0.005	0.308	0.000	0.037	0.002	0.315	1.000	4.8.2
L3	150 - 146 (3)	0.008	0.505	0.000	0.044	0.002	0.514	1.000	4.8.2
L4	146 - 141 (4)	0.007	0.371	0.000	0.029	0.001	0.378	1.000	4.8.2
L5	141 - 136 (5)	0.007	0.500	0.000	0.030	0.001	0.508	1.000	4.8.2
L6	136 - 131 (6)	0.010	0.638	0.000	0.041	0.001	0.650	1.000	4.8.2
L7	131 - 126 (7)	0.010	0.798	0.000	0.042	0.001	0.810	1.000	4.8.2
L8	126 - 121 (8)	0.011	0.947	0.000	0.042	0.001	0.960	1.000	4.8.2
L9	121 - 120.1 (9)	0.011	0.973	0.000	0.042	0.001	0.985	1.000	4.8.2
L10	120.1 - 119.85 (10)	0.005	0.488	0.000	0.021	0.000	0.493	1.000	4.8.2
L11	119.85 - 117.5 (11)	0.005	0.516	0.000	0.021	0.000	0.522	1.000	4.8.2
L12	117.5 - 117.25 (12)	0.005	0.507	0.000	0.020	0.000	0.513	1.000	4.8.2
L13	117.25 - 115.5 (13)	0.005	0.527	0.000	0.020	0.000	0.532	1.000	4.8.2
L14	115.5 - 115.25 (14)	0.004	0.407	0.000	0.015	0.000	0.411	1.000	4.8.2
L15	115.25 - 110.25 (15)	0.004	0.454	0.000	0.015	0.000	0.458	1.000	4.8.2
L16	110.25 - 103.75 (16)	0.005	0.482	0.000	0.015	0.000	0.487	1.000	4.8.2
L17	103.75 - 102.5 (17)	0.005	0.498	0.000	0.014	0.000	0.503	1.000	4.8.2
L18	102.5 - 100.5 (18)	0.005	0.517	0.000	0.014	0.000	0.522	1.000	4.8.2
L19	100.5 - 100.25 (19)	0.005	0.565	0.000	0.016	0.000	0.571	1.000	4.8.2
L20	100.25 - 98.5 (20)	0.005	0.575	0.000	0.016	0.000	0.581	1.000	4.8.2
L21	98.5 - 98.25 (21)	0.005	0.556	0.000	0.015	0.000	0.562	1.000	4.8.2

Section No.	Elevation ft	Ratio	Ratio	Ratio	Ratio	Ratio	Comb. Stress Ratio	Allow. Stress Ratio	Criteria
		P_u	M_{ux}	M_{uy}	V_u	T_u			
		ϕP_n	ϕM_{nx}	ϕM_{ny}	ϕV_n	ϕT_n			
L22	98.25 - 93.25 (22)	0.005	0.591	0.000	0.015	0.000	0.597	1.000	4.8.2
L23	93.25 - 90.5 (23)	0.005	0.603	0.000	0.015	0.000	0.609	1.000	4.8.2
L24	90.5 - 90.25 (24)	0.005	0.574	0.000	0.014	0.000	0.579	1.000	4.8.2
L25	90.25 - 85.25 (25)	0.006	0.603	0.000	0.014	0.000	0.609	1.000	4.8.2
L26	85.25 - 83.5 (26)	0.006	0.620	0.000	0.015	0.000	0.626	1.000	4.8.2
L27	83.5 - 83.25 (27)	0.004	0.461	0.000	0.011	0.000	0.466	1.000	4.8.2
L28	83.25 - 80.75 (28)	0.004	0.473	0.000	0.011	0.000	0.478	1.000	4.8.2
L29	80.75 - 80.5 (29)	0.004	0.408	0.000	0.009	0.000	0.411	1.000	4.8.2
L30	80.5 - 80.25 (30)	0.004	0.436	0.000	0.010	0.000	0.440	1.000	4.8.2
L31	80.25 - 77.5 (31)	0.004	0.452	0.000	0.010	0.000	0.457	1.000	4.8.2
L32	77.5 - 77.25 (32)	0.006	0.618	0.000	0.014	0.000	0.624	1.000	4.8.2
L33	77.25 - 68.5 (33)	0.006	0.630	0.000	0.014	0.000	0.636	1.000	4.8.2
L34	68.5 - 68 (34)	0.006	0.616	0.000	0.013	0.000	0.622	1.000	4.8.2
L35	68 - 64.25 (35)	0.006	0.635	0.000	0.013	0.000	0.642	1.000	4.8.2
L36	64.25 - 64 (36)	0.005	0.542	0.000	0.011	0.000	0.548	1.000	4.8.2
L37	64 - 60.5 (37)	0.006	0.556	0.000	0.011	0.000	0.562	1.000	4.8.2
L38	60.5 - 60.25 (38)	0.005	0.521	0.000	0.010	0.000	0.527	1.000	4.8.2
L39	60.25 - 60.1 (39)	0.005	0.522	0.000	0.010	0.000	0.527	1.000	4.8.2
L40	60.1 - 59.85 (40)	0.005	0.497	0.000	0.010	0.000	0.503	1.000	4.8.2
L41	59.85 - 59.1 (41)	0.005	0.499	0.000	0.010	0.000	0.504	1.000	4.8.2
L42	59.1 - 58.85 (42)	0.005	0.466	0.000	0.009	0.000	0.471	1.000	4.8.2
L43	58.85 - 55.4 (43)	0.005	0.481	0.000	0.009	0.000	0.487	1.000	4.8.2
L44	55.4 - 55.15 (44)	0.005	0.482	0.000	0.009	0.000	0.487	1.000	4.8.2
L45	55.15 - 54.75 (45)	0.005	0.482	0.000	0.009	0.000	0.487	1.000	4.8.2
L46	54.75 - 54.5 (46)	0.006	0.590	0.000	0.011	0.000	0.596	1.000	4.8.2
L47	54.5 - 49.5 (47)	0.007	0.606	0.000	0.011	0.000	0.613	1.000	4.8.2
L48	49.5 - 44.5 (48)	0.007	0.622	0.000	0.012	0.000	0.629	1.000	4.8.2
L49	44.5 - 41.3 (49)	0.007	0.636	0.000	0.012	0.000	0.643	1.000	4.8.2
L50	41.3 - 41.05 (50)	0.006	0.576	0.000	0.011	0.000	0.583	1.000	4.8.2
L51	41.05 - 34 (51)	0.007	0.579	0.000	0.010	0.000	0.585	1.000	4.8.2
L52	34 - 33 (52)	0.005	0.427	0.000	0.007	0.000	0.432	1.000	4.8.2
L53	33 - 31.5 (53)	0.005	0.428	0.000	0.007	0.000	0.433	1.000	4.8.2
L54	31.5 - 31.25 (54)	0.005	0.428	0.000	0.007	0.000	0.433	1.000	4.8.2
L55	31.25 - 30.5 (55)	0.005	0.428	0.000	0.007	0.000	0.434	1.000	4.8.2
L56	30.5 - 30.25 (56)	0.005	0.446	0.000	0.008	0.000	0.451	1.000	4.8.2
L57	30.25 - 25.75 (57)	0.006	0.458	0.000	0.008	0.000	0.463	1.000	4.8.2
L58	25.75 - 25.5	0.006	0.468	0.000	0.008	0.000	0.474	1.000	4.8.2

Section No.	Elevation ft	Ratio	Ratio	Ratio	Ratio	Ratio	Comb. Stress Ratio	Allow. Stress Ratio	Criteria
		P_u ϕP_n	M_{ux} ϕM_{nx}	M_{uy} ϕM_{ny}	V_u ϕV_n	T_u ϕT_n			
L59	25.5 - 24.7 (58)	0.006	0.468	0.000	0.008	0.000	0.474	1.000	4.8.2
L60	24.7 - 24.45 (59)	0.007	0.525	0.000	0.009	0.000	0.532	1.000	4.8.2
L61	24.45 - 24 (60)	0.007	0.525	0.000	0.009	0.000	0.532	1.000	4.8.2
L62	24 - 23.75 (61)	0.005	0.424	0.000	0.007	0.000	0.429	1.000	4.8.2
L63	23.75 - 18.75 (62)	0.005	0.434	0.000	0.007	0.000	0.439	1.000	4.8.2
L64	18.75 - 14.1 (63)	0.006	0.444	0.000	0.007	0.000	0.450	1.000	4.8.2
L65	14.1 - 13.8 (64)	0.006	0.436	0.000	0.007	0.000	0.441	1.000	4.8.2
L66	13.8 - 13.65 (65)	0.006	0.436	0.000	0.007	0.000	0.441	1.000	4.8.2
L67	13.65 - 10.5 (66)	0.006	0.437	0.000	0.007	0.000	0.442	1.000	4.8.2
L68	10.5 - 10.25 (67)	0.006	0.437	0.000	0.007	0.000	0.442	1.000	4.8.2
L69	10.25 - 5.25 (68)	0.006	0.447	0.000	0.007	0.000	0.453	1.000	4.8.2
L70	5.25 - 3 (69)	0.006	0.456	0.000	0.007	0.000	0.463	1.000	4.8.2
L71	3 - 2.9 (70)	0.006	0.471	0.000	0.007	0.000	0.477	1.000	4.8.2
L72	2.9 - 2.75 (71)	0.007	0.498	0.000	0.008	0.000	0.505	1.000	4.8.2
L73	2.75 - 2.65 (72)	0.007	0.498	0.000	0.008	0.000	0.505	1.000	4.8.2
L74	2.65 - 2.5 (73)	0.007	0.498	0.000	0.008	0.000	0.505	1.000	4.8.2
L75	2.5 - 2.25 (74)	0.007	0.509	0.000	0.008	0.000	0.516	1.000	4.8.2
L76	2.25 - 1.9 (75)	0.007	0.509	0.000	0.008	0.000	0.517	1.000	4.8.2
L77	1.9 - 1.65 (76)	0.007	0.535	0.000	0.009	0.000	0.542	1.000	4.8.2
L78	1.65 - 0 (77)	0.007	0.535	0.000	0.008	0.000	0.542	1.000	4.8.2

Section Capacity Table


Section No.	Elevation ft	Component Type	Size	Critical Element	P K	ϕP_{allow} K	% Capacity	Pass Fail
L1	160 - 155	Pole	TP16x16x0.375	1	-2.5776	579.8450	9.1	Pass
L2	155 - 150	Pole	TP16x16x0.375	2	-3.0420	579.8450	31.5	Pass
L3	150 - 146	Pole	TP16x16x0.375	3	-4.3736	579.8450	51.4	Pass
L4	146 - 141	Pole	TP22.924x22x0.25	4	-8.2050	1239.9700	37.8	Pass
L5	141 - 136	Pole	TP23.848x22.924x0.25	5	-8.9401	1274.1200	50.8	Pass
L6	136 - 131	Pole	TP24.7721x23.848x0.25	6	-12.8525	1306.9900	65.0	Pass
L7	131 - 126	Pole	TP25.6961x24.7721x0.25	7	-13.6450	1338.5700	81.0	Pass
L8	126 - 121	Pole	TP26.6201x25.6961x0.25	8	-14.4858	1368.8800	96.0	Pass
L9	121 - 120.1	Pole	TP26.7864x26.6201x0.25	9	-14.6454	1374.2000	98.5	Pass
L10	120.1 - 119.85	Pole	TP26.8326x26.7864x0.4875	10	-14.7218	2813.8100	49.3	Pass
L11	119.85 - 117.5	Pole	TP27.2669x26.8326x0.4875	11	-15.2367	2860.2000	52.2	Pass
L12	117.5 - 117.25	Pole	TP27.3131x27.2669x0.5	12	-15.3119	2937.2300	51.3	Pass
L13	117.25 - 115.5	Pole	TP27.6365x27.3131x0.5	13	-15.7185	2972.6600	53.2	Pass
L14	115.5 - 115.25	Pole	TP27.6827x27.6365x0.6625	14	-15.8111	3921.8900	41.1	Pass
L15	115.25 - 110.25	Pole	TP28.6068x27.6827x0.65	15	-17.1926	3981.2600	45.8	Pass
L16	110.25 - 103.75	Pole	TP29.808x28.6068x0.6375	16	-17.9676	3977.4200	48.7	Pass
L17	103.75 - 102.5	Pole	TP29.0743x28.0824x0.7125	17	-20.2943	4427.3000	50.3	Pass
L18	102.5 - 100.5	Pole	TP29.4711x29.0743x0.7	18	-20.9102	4412.3900	52.2	Pass
L19	100.5 - 100.25	Pole	TP29.5206x29.4711x0.6375	19	-20.9983	4034.0800	57.1	Pass
L20	100.25 - 98.5	Pole	TP29.8678x29.5206x0.6375	20	-21.5127	4082.5700	58.1	Pass
L21	98.5 - 98.25	Pole	TP29.9174x29.8678x0.6625	21	-21.6180	4246.2400	56.2	Pass
L22	98.25 - 93.25	Pole	TP30.9093x29.9174x0.65	22	-23.2201	4309.1500	59.7	Pass
L23	93.25 - 90.5	Pole	TP31.4548x30.9093x0.65	23	-24.1163	4386.8400	60.9	Pass
L24	90.5 - 90.25	Pole	TP31.5044x31.4548x0.6875	24	-24.2278	4641.7500	57.9	Pass

Section No.	Elevation ft	Component Type	Size	Critical Element	P K	ϕP_{allow} K	% Capacity	Pass Fail
L25	90.25 - 85.25	Pole	TP32.4962x31.5044x0.675	25	-26.0546	4705.8800	60.9	Pass
L26	85.25 - 83.5	Pole	TP32.8434x32.4962x0.6625	26	-26.6949	4670.9400	62.6	Pass
L27	83.5 - 83.25	Pole	TP32.893x32.8434x0.9125	27	-26.8319	6393.4900	46.6	Pass
L28	83.25 - 80.75	Pole	TP33.3889x32.893x0.9	28	-27.9192	6406.1600	47.8	Pass
L29	80.75 - 80.5	Pole	TP33.4385x33.3889x1.0625	29	-28.0538	7536.5500	41.1	Pass
L30	80.5 - 80.25	Pole	TP33.4881x33.4385x0.9875	30	-28.1726	7031.5100	44.0	Pass
L31	80.25 - 77.5	Pole	TP34.0336x33.4881x0.9625	31	-29.4675	6973.8100	45.7	Pass
L32	77.5 - 77.25	Pole	TP34.0832x34.0336x0.6875	32	-29.5844	5030.1800	62.4	Pass
L33	77.25 - 68.5	Pole	TP35.819x34.0832x0.6875	33	-31.3357	5157.1700	63.6	Pass
L34	68.5 - 68	Pole	TP35.2329x34.3013x0.75	34	-35.0668	5666.1200	62.2	Pass
L35	68 - 64.25	Pole	TP35.9317x35.2329x0.7375	35	-36.7426	5686.6000	64.2	Pass
L36	64.25 - 64	Pole	TP35.9782x35.9317x0.875	36	-36.8809	6729.3900	54.8	Pass
L37	64 - 60.5	Pole	TP36.6304x35.9782x0.8625	37	-38.5468	6758.8500	56.2	Pass
L38	60.5 - 60.25	Pole	TP36.677x36.6304x0.925	38	-38.6883	7245.3900	52.7	Pass
L39	60.25 - 60.1	Pole	TP36.7049x36.677x0.925	39	-38.7660	7251.0600	52.7	Pass
L40	60.1 - 59.85	Pole	TP36.7515x36.7049x0.975	40	-38.8957	7642.2700	50.3	Pass
L41	59.85 - 59.1	Pole	TP36.8912x36.7515x0.975	41	-39.2820	7672.1200	50.4	Pass
L42	59.1 - 58.85	Pole	TP36.9378x36.8912x1.05	42	-39.4284	8255.7500	47.1	Pass
L43	58.85 - 55.4	Pole	TP37.5806x36.9378x1.025	43	-41.3385	8209.1600	48.7	Pass
L44	55.4 - 55.15	Pole	TP37.6272x37.5806x1.025	44	-41.4908	8219.6200	48.7	Pass
L45	55.15 - 54.75	Pole	TP37.7018x37.6272x1.025	45	-41.7136	8236.3500	48.7	Pass
L46	54.75 - 54.5	Pole	TP37.7483x37.7018x0.825	46	-41.8385	6673.8300	59.6	Pass
L47	54.5 - 49.5	Pole	TP38.68x37.7483x0.8125	47	-44.3023	6740.7700	61.3	Pass
L48	49.5 - 44.5	Pole	TP39.6116x38.68x0.8	48	-46.8080	6802.5500	62.9	Pass
L49	44.5 - 41.3	Pole	TP40.2078x39.6116x0.7875	49	-48.4295	6801.2900	64.3	Pass
L50	41.3 - 41.05	Pole	TP40.2544x40.2078x0.875	50	-48.5816	7549.1400	58.3	Pass
L51	41.05 - 34	Pole	TP41.568x40.2544x0.875	51	-49.6990	7622.3600	58.5	Pass
L52	34 - 33	Pole	TP40.9962x39.8864x1.175	52	-55.9156	11105.400	43.2	Pass
L53	33 - 31.5	Pole	TP41.2736x40.9962x1.175	53	-56.8823	11182.800	43.3	Pass
L54	31.5 - 31.25	Pole	TP41.3199x41.2736x1.175	54	-57.0620	11195.700	43.3	Pass
L55	31.25 - 30.5	Pole	TP41.4586x41.3199x1.175	55	-57.5485	11234.400	43.4	Pass
L56	30.5 - 30.25	Pole	TP41.5048x41.4586x1.125	56	-57.7159	10782.000	45.1	Pass
L57	30.25 - 25.75	Pole	TP42.3372x41.5048x1.1	57	-60.6053	10766.200	46.3	Pass
L58	25.75 - 25.5	Pole	TP42.3834x42.3372x1.075	58	-60.7773	10539.700	47.4	Pass
L59	25.5 - 24.7	Pole	TP42.5314x42.3834x1.075	59	-61.2831	10577.500	47.4	Pass
L60	24.7 - 24.45	Pole	TP42.5776x42.5314x0.95	60	-61.4299	9386.1500	53.2	Pass
L61	24.45 - 24	Pole	TP42.6608x42.5776x0.95	61	-61.6785	9404.9200	53.2	Pass
L62	24 - 23.75	Pole	TP42.7071x42.6608x1.2	62	-61.8433	11821.900	42.9	Pass
L63	23.75 - 18.75	Pole	TP43.6319x42.7071x1.175	63	-65.0500	11840.500	43.9	Pass
L64	18.75 - 14.1	Pole	TP44.492x43.6319x1.15	64	-68.0648	11830.100	45.0	Pass
L65	14.1 - 13.8	Pole	TP44.5475x44.492x1.175	65	-68.2752	12095.800	44.1	Pass
L66	13.8 - 13.65	Pole	TP44.5752x44.5475x1.175	66	-68.3769	12103.500	44.1	Pass
L67	13.65 - 10.5	Pole	TP45.1579x44.5752x1.175	67	-70.4584	12266.000	44.2	Pass
L68	10.5 - 10.25	Pole	TP45.2041x45.1579x1.175	68	-70.6306	12278.900	44.2	Pass
L69	10.25 - 5.25	Pole	TP46.1289x45.2041x1.15	69	-73.8655	12276.900	45.3	Pass
L70	5.25 - 3	Pole	TP46.5451x46.1289x1.125	70	-75.3372	12127.800	46.3	Pass
L71	3 - 2.9	Pole	TP46.5636x46.5451x1.0875	71	-75.4136	11738.000	47.7	Pass
L72	2.9 - 2.75	Pole	TP46.5913x46.5636x1.025	72	-75.5012	11085.400	50.5	Pass
L73	2.75 - 2.65	Pole	TP46.6098x46.5913x1.025	73	-75.5609	11089.900	50.5	Pass
L74	2.65 - 2.5	Pole	TP46.6376x46.6098x1.025	74	-75.6486	11096.600	50.5	Pass

Section No.	Elevation ft	Component Type	Size	Critical Element	P K	ϕP_{allow} K	% Capacity	Pass Fail	
L75	2.5 - 2.25	Pole	TP46.6838x46.6376x1	75	-75.7967	10842.900	51.6	Pass	
L76	2.25 - 1.9	Pole	TP46.7486x46.6838x1	76	-76.0048	10858.200	51.7	Pass	
L77	1.9 - 1.65	Pole	TP46.7948x46.7486x0.95	77	-76.1477	10337.000	54.2	Pass	
L78	1.65 - 0	Pole	TP47.1x46.7948x0.95	78	-77.0619	10405.900	54.2	Pass	
							Summary		
							Pole (L9)	98.5	Pass
							RATING =	98.5	Pass

***NOTE: Above stress ratios for reinforced sections are approximate. More exact calculations are presented in Appendix C.**

APPENDIX B
BASE LEVEL DRAWING

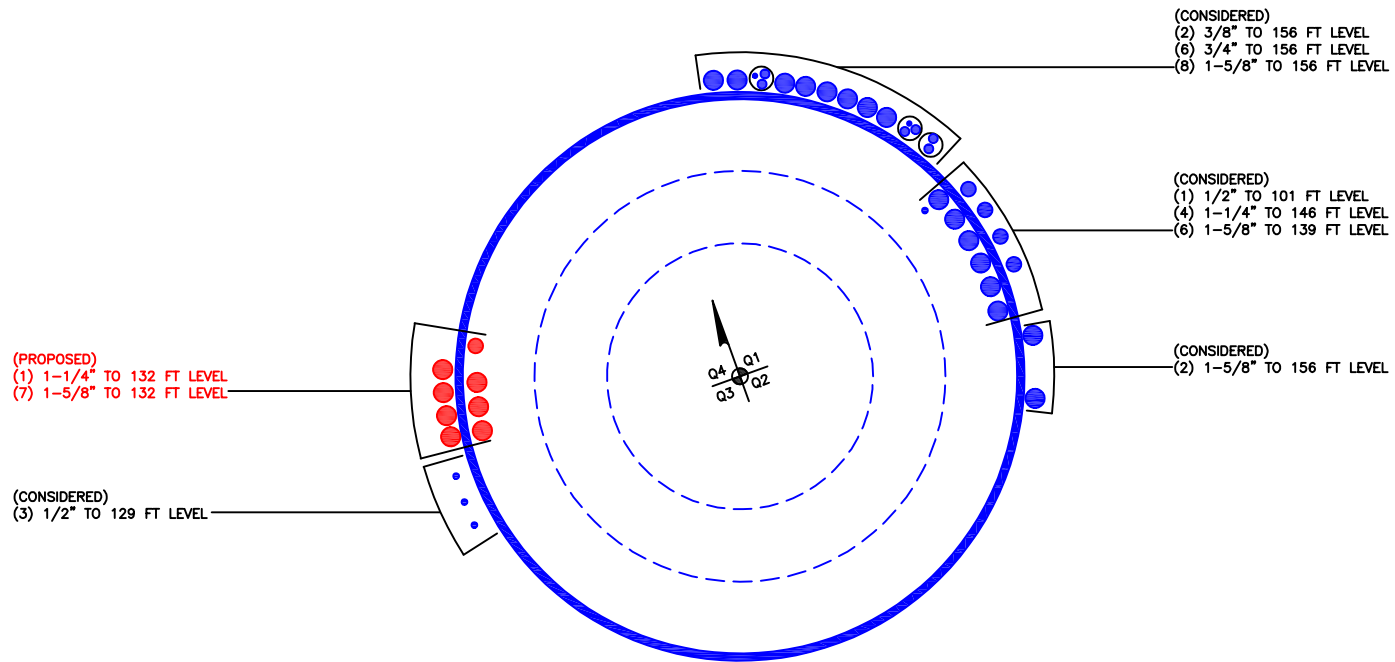

APPENDIX C
ADDITIONAL CALCULATIONS

Pole Geometry

	Pole Height Above Base (ft)	Section Length (ft)	Lap Splice Length (ft)	Number of Sides	Top Diameter (in)	Bottom Diameter (in)	Wall Thickness (in)	Bend Radius (in)	Pole Material
1	160	14	0	0	16	16	0.375	n/a	A53-B-35
2	146	42.25	3.75	12	22.00	29.808	0.25	1	A607-60
3	107.5	39	4.5	12	28.08	35.819	0.3125	1.25	A607-60
4	73	39	5	12	34.30	41.568	0.375	1.5	A607-60
5	39	39	0	12	39.89	47.1	0.375	1.5	A607-65

Reinforcement Configuration

	Bottom Effective Elevation (ft)	Top Effective Elevation (ft)	Type	Model	Pole Flat Width (in)	1	2	3	4	5	6	7	8	9	10	11	12
1	100.5	117.5	plate	CCI-SFP-045100	7.31				*								
2	98.5	115.5	plate	CCI-SFP-045100	7.41								*				*
3	64.25	80.75	plate	CCI-AFP-085125	8.95												*
4	10.5	41.3	plate	CCI-AFP-085125	10.77												*
5	3	10.5	plate	CCI-AFP-060100	12.1												*
6	77.5	83.5	plate	MS-600 (1.1875")	8.8	*			*				*				
7	54.75	64.25	plate	MS-600 (1.1875")	9.63	*			*				*				
8	25.75	35.25	plate	MS-650 (1.1875")	11.08	*			*				*				
9	2.5	30.5	plate	MS-600 (1.1875")	11.11	*			*				*				
10	30.5	60.5	plate	MS-650 (1.1875")	9.82	*			*				*				
11	60.5	80.5	plate	MS-600 (1.1875")	8.96	*			*				*				
12	80.5	98.5	plate	MS-600 (1.1875")	8	*			*				*				
13	1.9	14.1	channel	MP3-04 (1.1875")	11.92					*			*				
14	2.9	30.5	channel	MP3-05 (1.1875")	11.11			*								*	
15	30.5	59.1	channel	MP3-04 (1.1875")	9.88			*								*	
16	13.9	21.5	channel	MP3-05 (1.1875")	11.06					*			*				
17	31.5	60.1	channel	MP3-04 (1.1875")	9.84							*					
18	0	24	plate	TS-5.875"x1.25"	11.43		-5.5	-5.5		-5.5	-5.5			-5.5	-5.5		
19	24.7	55.4	plate	CCI-AFP-085125	10.07				*					*			
20	55.4	90.5	plate	CCI-AFP-085125	8.43				*					*			
21	90.5	120.1	plate	CCI-AFP-060100	7.18				*					*			
22	100.5	120.1	plate	CCI-AFP-060100	7.18				*					*			
23	80.5	100.5	plate	MS-650 (1.1875")	7.9	*			*				*				
24	0	2.5	plate	1.25" x 4"	12.5	*			*			*		*			
25	24	25.75	plate	TS-5.875"x1.25"	11.34		-6			-6					-6		
26																	

Reinforcement Details

	B (in)	H (in)	Gross Area (in ²)	Pole Face to Centroid (in)	Bottom Termination Length (in)	Top Termination Length (in)	L _y (in)	Net Area (in ²)	Bolt Hole Size (in)	Reinforcement Material
1	4.5	1	4.5	0.5	18.000	18.000	3.250	1.1875		A572-65
2	4.5	1	4.5	0.5	18.000	18.000	20.000	3.250	1.1875	A572-65
3	8.5	1.25	10.625	0.625	51.000	51.000	17.000	9.063	1.1875	A572-65
4	8.5	1.25	10.625	0.625	51.000	51.000	17.000	9.063	1.1875	A572-65
5	6	1	6	0.5	30.000	30.000	16.000	4.750	1.1875	A572-65
6	6	1	6	0.5	24.000	24.000	16.375	4.750	1.1875	A572-65
7	6	1	6	0.5	24.000	24.000	16.375	4.750	1.1875	A572-65
8	6.5	1.25	8.125	0.625	33.000	33.000	19.250	6.563	1.1875	A572-65
9	6	1	6	0.5	24.000	24.000	16.375	4.750	1.1875	A572-65
10	6.5	1.25	8.125	0.625	33.000	33.000	19.250	6.563	1.1875	A572-65
11	6	1	6	0.5	24.000	24.000	16.375	4.750	1.1875	A572-65
12	6	1	6	0.5	24.000	24.000	16.375	4.750	1.1875	A572-65
13	4.78	1.61	4.13	0.61	17.000	17.000	18.000	3.593	1.1875	A572-65
14	5.33	2.09	5.65	0.79	29.000	29.000	18.000	5.025	1.1875	A572-65
15	4.78	1.61	4.13	0.61	17.000	17.000	18.000	3.593	1.1875	A572-65
16	5.33	2.09	5.65	0.79	29.000	29.000	18.000	5.025	1.1875	A572-65
17	4.78	1.61	4.13	0.61	17.000	17.000	18.000	3.593	1.1875	A572-65
18	1.25	5.875	7.34375	2.9375	n/a	n/a	0.000	7.344	0.0000	A572-65
19	8.5	1.25	10.625	0.625	51.000	51.000	17.000	9.063	1.1875	A572-65
20	8.5	1.25	10.625	0.625	51.000	51.000	17.000	9.063	1.1875	A572-65
21	6	1	6	0.5	30.000	30.000	16.000	4.750	1.1875	A572-65
22	6	1	6	0.5	30.000	30.000	16.000	4.750	1.1875	A572-65
23	6.5	1.25	8.125	0.625	33.000	33.000	19.250	6.563	1.1875	A572-65
24	1.25	4	5	2	n/a	n/a	0.000	5.000	0.0000	A572-65
25	1.25	5.875	7.34375	2.9375	n/a	n/a	0.000	7.344	0.0000	A572-65

TNX Section Forces

Increment (ft):		TNX Output		
5			M _{ux} (kip-ft)	V _u (K)
	Section Height (ft)	P _u (K)		
1	160 - 155	2.58	20.42	10.51
2	155 - 150	3.04	73.97	10.86
3	150 - 146	4.37	121.29	12.81
4	146 - 141	8.20	211.82	17.93
5	141 - 136	8.94	305.46	19.38
6	136 - 131	12.85	415.76	26.88
7	131 - 126	13.65	552.59	28.37
8	126 - 121	14.49	695.72	28.91
9	121 - 120.1	14.65	721.76	29.00
10	120.1 - 119.85	14.72	729.02	29.03
11	119.85 - 117.5	15.24	797.57	29.33
12	117.5 - 117.25	15.31	804.90	29.36
13	117.25 - 115.5	15.72	856.46	29.59
14	115.5 - 115.25	15.81	863.86	29.61
15	115.25 - 110.25	17.19	1013.57	30.28
16	110.25 - 107.5	17.97	1097.34	30.65
17	107.5 - 102.5	20.29	1252.57	31.42
18	102.5 - 100.5	20.91	1315.70	31.81
19	100.5 - 100.25	21.00	1323.65	31.84
20	100.25 - 98.5	21.51	1379.53	32.07
21	98.5 - 98.25	21.62	1387.55	32.09
22	98.25 - 93.25	23.22	1549.55	32.74
23	93.25 - 90.5	24.12	1640.02	33.10
24	90.5 - 90.25	24.23	1648.30	33.13
25	90.25 - 85.25	26.05	1815.49	33.79
26	85.25 - 83.5	26.69	1874.79	34.03
27	83.5 - 83.25	26.83	1883.29	34.05
28	83.25 - 80.75	27.92	1968.82	34.41
29	80.75 - 80.5	28.05	1977.42	34.44
30	80.5 - 80.25	28.17	1986.03	34.47
31	80.25 - 77.5	29.47	2081.33	34.88
32	77.5 - 77.25	29.58	2090.05	34.90
33	77.25 - 73	31.34	2239.50	35.47
34	73 - 68	35.07	2418.77	36.27
35	68 - 64.25	36.74	2555.60	36.76
36	64.25 - 64	36.88	2564.78	36.77
37	64 - 60.5	38.55	2694.23	37.24
38	60.5 - 60.25	38.69	2703.54	37.26
39	60.25 - 60.1	38.77	2709.13	37.28
40	60.1 - 59.85	38.90	2718.45	37.32
41	59.85 - 59.1	39.28	2746.46	37.42
42	59.1 - 58.85	39.43	2755.82	37.45
43	58.85 - 55.4	41.34	2885.78	37.93
44	55.4 - 55.15	41.49	2895.26	37.95
45	55.15 - 54.75	41.71	2910.45	38.01
46	54.75 - 54.5	41.84	2919.95	38.04
47	54.5 - 49.5	44.30	3111.62	38.67
48	49.5 - 44.5	46.81	3306.35	39.28
49	44.5 - 41.3	48.43	3432.53	39.65
50	41.3 - 41.05	48.58	3442.44	39.66
51	41.05 - 39	49.70	3523.96	39.92
52	39 - 33	55.92	3766.02	40.79
53	33 - 31.5	56.88	3827.30	40.98
54	31.5 - 31.25	57.06	3837.54	40.99
55	31.25 - 30.5	57.55	3868.31	41.09
56	30.5 - 30.25	57.72	3878.58	41.11
57	30.25 - 25.75	60.61	4064.63	41.63
58	25.75 - 25.5	60.78	4075.03	41.64
59	25.5 - 24.7	61.28	4108.37	41.74
60	24.7 - 24.45	61.43	4118.80	41.75
61	24.45 - 24	61.68	4137.59	41.80
62	24 - 23.75	61.84	4148.04	41.82
63	23.75 - 18.75	65.05	4358.41	42.37
64	18.75 - 14.1	68.06	4556.35	42.83
65	14.1 - 13.8	68.28	4569.19	42.84
66	13.8 - 13.65	68.38	4575.61	42.85
67	13.65 - 10.5	70.46	4711.03	43.17
68	10.5 - 10.25	70.63	4721.82	43.18
69	10.25 - 5.25	73.87	4938.83	43.67
70	5.25 - 3	75.34	5037.26	43.89
71	3 - 2.9	75.41	5041.64	43.87
72	2.9 - 2.75	75.50	5048.22	43.89
73	2.75 - 2.65	75.56	5052.61	43.90
74	2.65 - 2.5	75.65	5059.19	43.91
75	2.5 - 2.25	75.80	5070.17	43.94
76	2.25 - 1.9	76.00	5085.55	43.97
77	1.9 - 1.65	76.15	5096.54	43.99
78	1.65 - 0	77.06	5169.21	44.17

Analysis Results

Elevation (ft)	Component Type	Size	Critical Element	% Capacity	Pass / Fail
160 - 155	Pole	TP16x16x0.375	Pole	9.1%	Pass
155 - 150	Pole	TP16x16x0.375	Pole	31.4%	Pass
150 - 146	Pole	TP16x16x0.375	Pole	51.4%	Pass
146 - 141	Pole	TP22.924x22x0.25	Pole	37.7%	Pass
141 - 136	Pole	TP23.848x22.924x0.25	Pole	50.7%	Pass
136 - 131	Pole	TP24.772x23.848x0.25	Pole	64.8%	Pass
131 - 126	Pole	TP25.696x24.772x0.25	Pole	80.8%	Pass
126 - 121	Pole	TP26.62x25.696x0.25	Pole	95.7%	Pass
121 - 120.1	Pole	TP26.786x26.62x0.25	Pole	98.3%	Pass
120.1 - 119.85	Pole + Reinf.	TP26.833x26.786x0.4875	Reinf. 21 Tension Rupture	69.9%	Pass
119.85 - 117.5	Pole + Reinf.	TP27.267x26.833x0.4875	Reinf. 21 Tension Rupture	74.6%	Pass
117.5 - 117.25	Pole + Reinf.	TP27.313x27.267x0.5	Reinf. 22 Tension Rupture	69.5%	Pass
117.25 - 115.5	Pole + Reinf.	TP27.637x27.313x0.5	Reinf. 22 Tension Rupture	72.7%	Pass
115.5 - 115.25	Pole + Reinf.	TP27.683x27.637x0.6625	Reinf. 1 Tension Rupture	64.1%	Pass
115.25 - 110.25	Pole + Reinf.	TP28.607x27.683x0.65	Reinf. 1 Tension Rupture	71.8%	Pass
110.25 - 107.5	Pole + Reinf.	TP29.808x28.607x0.6375	Reinf. 1 Tension Rupture	75.8%	Pass
107.5 - 102.5	Pole + Reinf.	TP29.074x28.082x0.7125	Reinf. 1 Tension Rupture	78.9%	Pass
102.5 - 100.5	Pole + Reinf.	TP29.471x29.074x0.7	Reinf. 1 Tension Rupture	81.3%	Pass
100.5 - 100.25	Pole + Reinf.	TP29.521x29.471x0.6375	Reinf. 21 Tension Rupture	83.1%	Pass
100.25 - 98.5	Pole + Reinf.	TP29.868x29.521x0.6375	Reinf. 21 Tension Rupture	85.1%	Pass
98.5 - 98.25	Pole + Reinf.	TP29.917x29.868x0.6625	Reinf. 23 Tension Rupture	81.4%	Pass
98.25 - 93.25	Pole + Reinf.	TP30.909x29.917x0.65	Reinf. 23 Tension Rupture	86.5%	Pass
93.25 - 90.5	Pole + Reinf.	TP31.455x30.909x0.65	Reinf. 23 Tension Rupture	89.1%	Pass
90.5 - 90.25	Pole + Reinf.	TP31.504x31.455x0.6875	Reinf. 23 Tension Rupture	87.9%	Pass
90.25 - 85.25	Pole + Reinf.	TP32.496x31.504x0.675	Reinf. 23 Tension Rupture	92.4%	Pass
85.25 - 83.5	Pole + Reinf.	TP32.843x32.496x0.6625	Reinf. 23 Tension Rupture	93.9%	Pass
83.5 - 83.25	Pole + Reinf.	TP32.893x32.843x0.9125	Reinf. 6 Tension Rupture	71.1%	Pass
83.25 - 80.75	Pole + Reinf.	TP33.389x32.893x0.9	Reinf. 6 Tension Rupture	72.8%	Pass
80.75 - 80.5	Pole + Reinf.	TP33.439x33.389x1.0625	Reinf. 6 Tension Rupture	59.8%	Pass
80.5 - 80.25	Pole + Reinf.	TP33.488x33.439x0.9875	Reinf. 11 Tension Rupture	64.3%	Pass
80.25 - 77.5	Pole + Reinf.	TP34.034x33.488x0.9625	Reinf. 11 Tension Rupture	66.0%	Pass
77.5 - 77.25	Pole + Reinf.	TP34.083x34.034x0.6875	Reinf. 11 Tension Rupture	92.4%	Pass
77.25 - 73	Pole + Reinf.	TP35.819x34.083x0.6875	Reinf. 11 Tension Rupture	95.5%	Pass
73 - 68	Pole + Reinf.	TP35.233x34.301x0.75	Reinf. 11 Tension Rupture	92.8%	Pass
68 - 64.25	Pole + Reinf.	TP35.932x35.233x0.7375	Reinf. 11 Tension Rupture	95.2%	Pass
64.25 - 64	Pole + Reinf.	TP35.978x35.932x0.875	Reinf. 7 Tension Rupture	83.9%	Pass
64 - 60.5	Pole + Reinf.	TP36.63x35.978x0.8625	Reinf. 7 Tension Rupture	85.8%	Pass
60.5 - 60.25	Pole + Reinf.	TP36.677x36.63x0.925	Reinf. 7 Tension Rupture	81.0%	Pass
60.25 - 60.1	Pole + Reinf.	TP36.705x36.677x0.925	Reinf. 7 Tension Rupture	81.1%	Pass
60.1 - 59.85	Pole + Reinf.	TP36.751x36.705x0.975	Reinf. 7 Tension Rupture	78.4%	Pass
59.85 - 59.1	Pole + Reinf.	TP36.891x36.751x0.975	Reinf. 7 Tension Rupture	78.8%	Pass
59.1 - 58.85	Pole + Reinf.	TP36.938x36.891x1.05	Reinf. 7 Tension Rupture	71.7%	Pass
58.85 - 55.4	Pole + Reinf.	TP37.581x36.938x1.025	Reinf. 7 Tension Rupture	73.3%	Pass
55.4 - 55.15	Pole + Reinf.	TP37.627x37.581x1.025	Reinf. 7 Tension Rupture	73.4%	Pass
55.15 - 54.75	Pole + Reinf.	TP37.702x37.627x1.025	Reinf. 7 Tension Rupture	73.6%	Pass
54.75 - 54.5	Pole + Reinf.	TP37.748x37.702x0.825	Reinf. 10 Tension Rupture	89.4%	Pass
54.5 - 49.5	Pole + Reinf.	TP38.68x37.748x0.8125	Reinf. 10 Tension Rupture	91.8%	Pass
49.5 - 44.5	Pole + Reinf.	TP39.612x38.68x0.8	Reinf. 10 Tension Rupture	94.1%	Pass
44.5 - 41.3	Pole + Reinf.	TP40.208x39.612x0.7875	Reinf. 10 Tension Rupture	95.5%	Pass
41.3 - 41.05	Pole + Reinf.	TP40.254x40.208x0.875	Reinf. 10 Tension Rupture	83.8%	Pass
41.05 - 39	Pole + Reinf.	TP41.568x40.254x0.875	Reinf. 10 Tension Rupture	84.6%	Pass
39 - 33	Pole + Reinf.	TP40.996x39.886x1.175	Reinf. 10 Tension Rupture	65.9%	Pass
33 - 31.5	Pole + Reinf.	TP41.274x40.996x1.175	Reinf. 10 Tension Rupture	66.4%	Pass
31.5 - 31.25	Pole + Reinf.	TP41.324x41.274x1.175	Reinf. 10 Tension Rupture	66.0%	Pass
31.25 - 30.5	Pole + Reinf.	TP41.459x41.324x1.175	Reinf. 10 Tension Rupture	66.3%	Pass
30.5 - 30.25	Pole + Reinf.	TP41.505x41.459x1.125	Reinf. 9 Tension Rupture	69.5%	Pass
30.25 - 25.75	Pole + Reinf.	TP42.337x41.505x1.1	Reinf. 9 Tension Rupture	71.0%	Pass
25.75 - 25.5	Pole + Reinf.	TP42.383x42.337x1.075	Reinf. 9 Tension Rupture	74.9%	Pass
25.5 - 24.7	Pole + Reinf.	TP42.531x42.383x1.075	Reinf. 9 Tension Rupture	75.2%	Pass
24.7 - 24.45	Pole + Reinf.	TP42.578x42.531x0.95	Reinf. 9 Tension Rupture	82.4%	Pass
24.45 - 24	Pole + Reinf.	TP42.661x42.578x0.95	Reinf. 9 Tension Rupture	82.5%	Pass
24 - 23.75	Pole + Reinf.	TP42.707x42.661x1.2	Reinf. 9 Tension Rupture	66.5%	Pass
23.75 - 18.75	Pole + Reinf.	TP43.632x42.707x1.175	Reinf. 9 Tension Rupture	68.1%	Pass
18.75 - 14.1	Pole + Reinf.	TP44.492x43.632x1.15	Reinf. 9 Tension Rupture	69.5%	Pass
14.1 - 13.8	Pole + Reinf.	TP44.547x44.492x1.175	Reinf. 9 Tension Rupture	67.8%	Pass
13.8 - 13.65	Pole + Reinf.	TP44.575x44.547x1.175	Reinf. 9 Tension Rupture	67.8%	Pass
13.65 - 10.5	Pole + Reinf.	TP45.158x44.575x1.175	Reinf. 9 Tension Rupture	68.7%	Pass
10.5 - 10.25	Pole + Reinf.	TP45.204x45.158x1.175	Reinf. 9 Tension Rupture	68.8%	Pass
10.25 - 5.25	Pole + Reinf.	TP46.129x45.204x1.15	Reinf. 9 Tension Rupture	70.2%	Pass
5.25 - 3	Pole + Reinf.	TP46.545x46.129x1.125	Reinf. 9 Tension Rupture	70.8%	Pass
3 - 2.9	Pole + Reinf.	TP46.564x46.545x1.0875	Reinf. 9 Tension Rupture	73.0%	Pass
2.9 - 2.75	Pole + Reinf.	TP46.591x46.564x1.025	Reinf. 9 Tension Rupture	80.6%	Pass
2.75 - 2.65	Pole + Reinf.	TP46.61x46.591x1.025	Reinf. 9 Tension Rupture	80.6%	Pass
2.65 - 2.5	Pole + Reinf.	TP46.638x46.61x1.025	Reinf. 9 Tension Rupture	80.7%	Pass
2.5 - 2.25	Pole + Reinf.	TP46.684x46.638x1	Reinf. 18 Compression	73.5%	Pass
2.25 - 1.9	Pole + Reinf.	TP46.749x46.684x1	Reinf. 18 Compression	73.6%	Pass
1.9 - 1.65	Pole + Reinf.	TP46.795x46.749x0.95	Reinf. 18 Compression	75.2%	Pass
1.65 - 0	Pole + Reinf.	TP47.1x46.795x0.95	Reinf. 18 Compression	75.6%	Pass
				Summary	
			Pole	98.3%	Pass
			Reinforcement	95.5%	Pass
			Overall	98.3%	Pass


Monopole Base Plate Connection



Site Info	
BU #	876334
Site Name	DOUTHINGTON, SMORO
Order #	450298 Rev. 0

Analysis Considerations	
TIA-222 Revision	G
Grout Considered:	No
l_{ar} (in)	4.75
Eta Factor, η	0.5

Applied Loads	
Moment (kip-ft)	5169.00
Axial Force (kips)	77.00
Shear Force (kips)	44.00

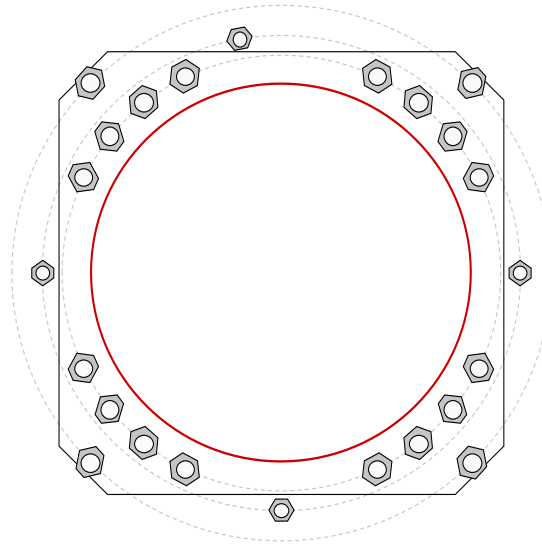

Connection Properties	Analysis Results
-----------------------	------------------

Anchor Rod Data
GROUP 1: (16) 2-1/4" ϕ bolts (A615-75 N; $F_y=75$ ksi, $F_u=100$ ksi) on 54.375" BC
GROUP 2: (4) 1-3/4" ϕ bolts (F1554-105 N; $F_y=105$ ksi, $F_u=125$ ksi) on 59.1" BC <i>pos. (deg): 0, 100, 180, 270</i>
GROUP 3: (4) 2-1/4" ϕ bolts (A193 Gr. B7 N; $F_y=105$ ksi, $F_u=125$ ksi) on 66.8125" BC
Base Plate Data
55" OD x 3" Plate (A572-50; $F_y=50$ ksi, $F_u=65$ ksi)
Stiffener Data
N/A
Pole Data
47.1" x 0.375" 12-sided pole (A607-60; $F_y=60$ ksi, $F_u=75$ ksi)

Anchor Rod Summary	<i>(units of kips, kip-in)</i>		
GROUP 1:	$P_{u,c} = 189.71$	$\phi P_{n,t} = 260$	Stress Rating
	$V_u = 2.75$	$\phi V_n = n/a$	75.1%
	$M_u = n/a$	$\phi M_n = n/a$	Pass
GROUP 2:	$P_{u,c} = 119.19$	$\phi P_{n,t} = 190$	Stress Rating
	$V_u = 0$	$\phi V_n = n/a$	62.7%
	$M_u = n/a$	$\phi M_n = n/a$	Pass
GROUP 3:	$P_{u,c} = 232.25$	$\phi P_{n,t} = 325$	Stress Rating
	$V_u = 0$	$\phi V_n = n/a$	71.5%
	$M_u = n/a$	$\phi M_n = n/a$	Pass
Base Plate Summary			
Max Stress (ksi):	30.19	(Flexural)	
Allowable Stress (ksi):	45		
Stress Rating:	67.1%		Pass

Drilled Pier Foundation

BU #: 876334
 Site Name: SOUTHTON, SMO
 Order Number: 450298 Rev. 0

TIA-222 Revison: G
 Tower Type: Monopole



Applied Loads		
	Comp.	Uplift
Moment (kip-ft)	5169	
Axial Force (kips)	77	
Shear Force (kips)	44	

Material Properties		
Concrete Strength, f _c :	3	ksi
Rebar Strength, F _y :	60	ksi

Pier Design Data		
Depth	21	ft
Ext. Above Grade	0.5	ft
Pier Section 1		
<i>From 0.5' above grade to 21' below grade</i>		
Pier Diameter	7	ft
Rebar Quantity	32	
Rebar Size	11	
Clear Cover to Ties	4	in
Tie Size	5	

Analysis Results		
Soil Lateral Capacity		
	Compression	Uplift
D _{v=0} (ft from TOC)	5.48	-
Soil Safety Factor	1.53	-
Max Moment (kip-ft)	5378.29	-
Rating	86.7%	-
Soil Vertical Capacity		
	Compression	Uplift
Skin Friction (kips)	245.32	-
End Bearing (kips)	1665.42	-
Weight of Concrete (kips)	148.94	-
Total Capacity (kips)	1910.74	-
Axial (kips)	225.94	-
Rating	11.8%	-
Reinforced Concrete Capacity		
	Compression	Uplift
Critical Depth (ft from TOC)	5.25	-
Critical Moment (kip-ft)	5377.37	-
Critical Moment Capacity	7574.49	-
Rating	71.0%	-
Soil Interaction Rating		86.7%
Structural Foundation Rating		71.0%

Check Limitation	
N/A	<input type="checkbox"/>

Soil Profile		
Groundwater Depth	n/a	ft
# of Layers	8	



Layer	Top (ft)	Bottom (ft)	Thickness (ft)	γ _{soil} (pcf)	γ _{concrete} (pcf)	Cohesion (ksf)	Angle of Friction (degrees)	Calculated Ultimate Skin Friction Comp (ksf)	Calculated Ultimate Skin Friction Uplift (ksf)	Ultimate Skin Friction Comp Override (ksf)	Ultimate Skin Friction Uplift Override (ksf)	Ult. Gross Bearing Capacity (ksf)	SPT Blow Count	Soil Type
1	0	2	2	110	150	0	0	0.000	0.000	0.00	0.00			Cohesionless
2	2	3.3	1.3	130	150	0	0	0.000	0.000	0.00	0.00			Cohesionless
3	3.3	5	1.7	130	150	0	36	0.000	0.000	0.00	0.00			Cohesionless
4	5	6	1	130	150	0	36	0.000	0.000	0.65	0.65			Cohesionless
5	6	8	2	120	150	0	30	0.000	0.000	0.90	0.90			Cohesionless
6	8	12.4	4.4	130	150	0	36	0.000	0.000	1.38	1.38			Cohesionless
7	12.4	14	1.6	145	150	0	40	0.00	0.00	3.97	3.97			Cohesionless
8	14	21	7	145	150	0	40	0.00	0.00	0.00	0.00	57.7		Cohesionless

ASCE 7 Hazards Report

Address:
No Address at This
Location

Standard: ASCE/SEI 7-10
Risk Category: II
Soil Class: D - Stiff Soil

Elevation: 296.07 ft (NAVD 88)
Latitude: 41.632472
Longitude: -72.89425

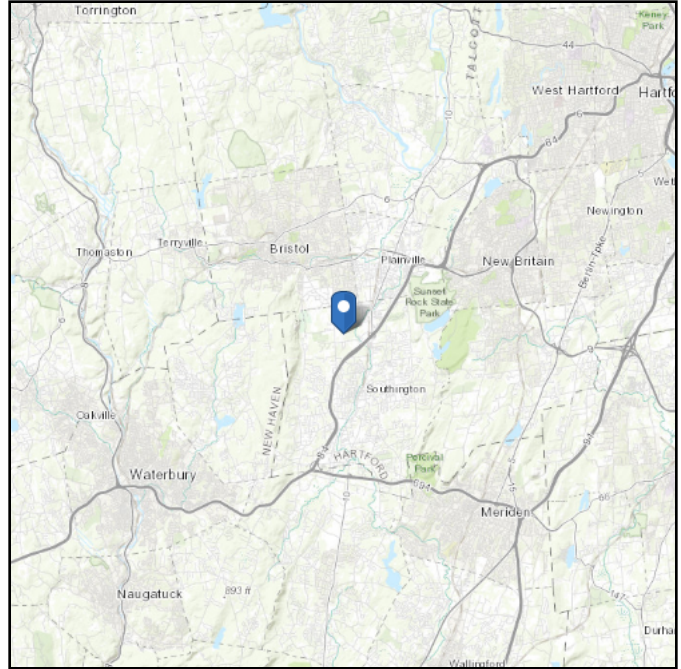
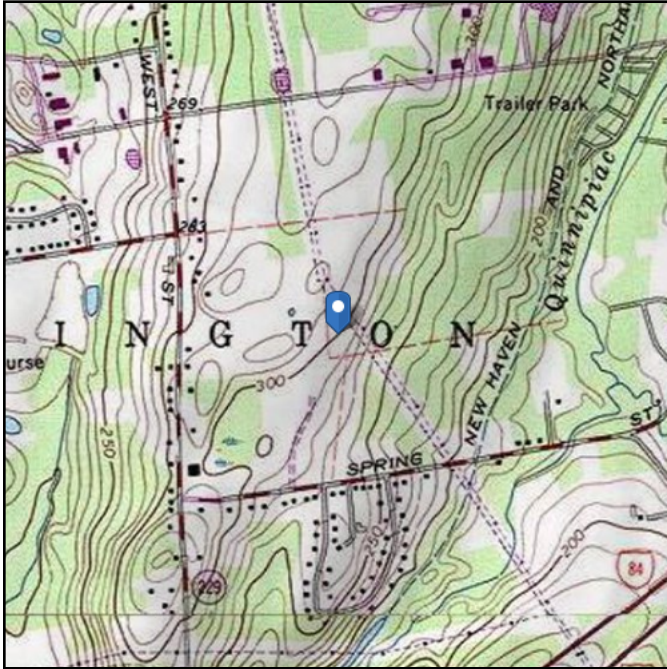


Site Soil Class: D - Stiff Soil

Results:

S_S :	0.185	S_{DS} :	0.197
S_1 :	0.064	S_{D1} :	0.102
F_a :	1.6	T_L :	6
F_v :	2.4	PGA :	0.094
S_{MS} :	0.295	PGA _M :	0.151
S_{M1} :	0.153	F _{PGA} :	1.6
		I_e :	1

Seismic Design Category B

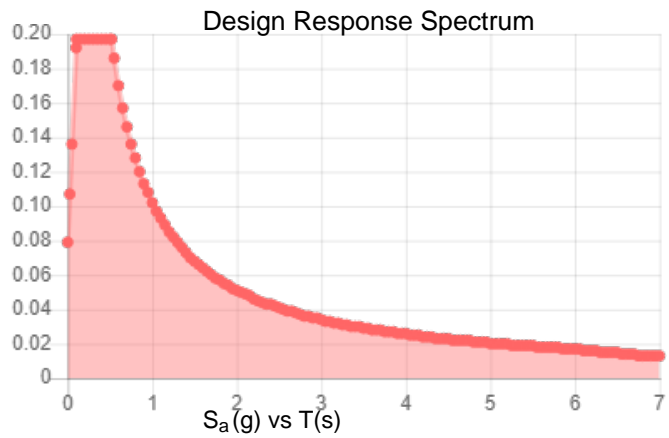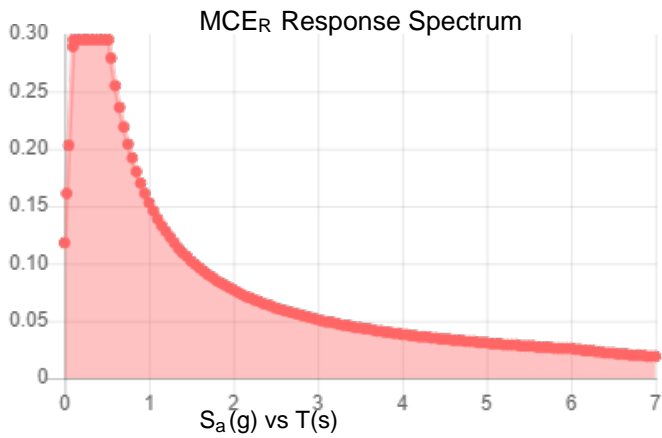

Data Accessed:

Mon Jan 14 2019

Date Source:

USGS Seismic Design Maps based on ASCE/SEI 7-10, incorporating Supplement 1 and errata of March 31, 2013, and ASCE/SEI 7-10 Table 1.5-2. Additional data for site-specific ground motion procedures in accordance with ASCE/SEI 7-10 Ch. 21 are available from USGS.

Ice

Results:

Ice Thickness: 1.00 in.

Concurrent Temperature: 5 F

Gust Speed: 50 mph

Data Source: Standard ASCE/SEI 7-10, Figs. 10-2 through 10-8

Date Accessed: Mon Jan 14 2019

Ice thicknesses on structures in exposed locations at elevations higher than the surrounding terrain and in valleys and gorges may exceed the mapped values.

Values provided are equivalent radial ice thicknesses due to freezing rain with concurrent 3-second gust speeds, for a 50-year mean recurrence interval, and temperatures concurrent with ice thicknesses due to freezing rain. Thicknesses for ice accretions caused by other sources shall be obtained from local meteorological studies. Ice thicknesses in exposed locations at elevations higher than the surrounding terrain and in valleys and gorges may exceed the mapped values.

The ASCE 7 Hazard Tool is provided for your convenience, for informational purposes only, and is provided "as is" and without warranties of any kind. The location data included herein has been obtained from information developed, produced, and maintained by third party providers; or has been extrapolated from maps incorporated in the ASCE 7 standard. While ASCE has made every effort to use data obtained from reliable sources or methodologies, ASCE does not make any representations or warranties as to the accuracy, completeness, reliability, currency, or quality of any data provided herein. Any third-party links provided by this Tool should not be construed as an endorsement, affiliation, relationship, or sponsorship of such third-party content by or from ASCE.

ASCE does not intend, nor should anyone interpret, the results provided by this Tool to replace the sound judgment of a competent professional, having knowledge and experience in the appropriate field(s) of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the contents of this Tool or the ASCE 7 standard.

In using this Tool, you expressly assume all risks associated with your use. Under no circumstances shall ASCE or its officers, directors, employees, members, affiliates, or agents be liable to you or any other person for any direct, indirect, special, incidental, or consequential damages arising from or related to your use of, or reliance on, the Tool or any information obtained therein. To the fullest extent permitted by law, you agree to release and hold harmless ASCE from any and all liability of any nature arising out of or resulting from any use of data provided by the ASCE 7 Hazard Tool.