

Filed by:

Kri Pelletier, Property Specialist - SBA Communications
134 Flanders Rd., Suite 125, Westborough, MA 01581
508.251.0720 x 3804 - kpelletier@sbasite.com

December 20, 2017

Melanie A. Bachman
Acting Executive Director
Connecticut Siting Council
Ten Franklin Square
New Britain, CT 06051

Notice of Exempt Modification
299 Sheffield Street, Waterbury, CT
41 35 38.72 N / -73 3 2.04 W
Sprint #: CT52XC053 _DOMU

Dear Ms. Bachman:

Sprint (Clearwire) currently maintains antennas at the 127-foot level of the existing 158-foot Monopole Tower at 299 Sheffield Street, Waterbury, CT. The tower is owned by SBA Towers, LLC. The property is owned by Level Development Corporation. Sprint now intends to replace (3) existing cell antennas with (3) newer technology cell antennas at the 127-foot level of the tower. Sprint's proposed full scope of work is as follows:

Remove:

At ground level – no change to existing compound or equipment area

- (2) Sprint (Nextel) GPS

At 127':

- (3) RRH
- (1) Junction Box

Remove and Replace:

At ground level – no change to existing compound or equipment area:

- Remove (1) Sprint (Nextel) GPS and replace with (1) Sprint GPS
- Remove existing Sprint (Clearwire) Equipment Rack within existing shelter and replace with Sprint Equipment Cabinet within existing shelter

At 127':

- Remove (3) existing LLPX310R panel antennas and replace with (3) ETCR-654L12H6 panel antennas

Install:

At 127':

- (3) 1900 MHz RRHs
- (3) 2500 MHz RRHs
- (6) 800 MHz RRHs
- Platform reinforcement kit (Sitepro1 PRK-HD), pipe rails, pipe braces

Existing Equipment to Remain (Including entitlements):

At 127':

- (2) Microwave Dishes

This facility was approved February 19, 2002 by the Zoning Board of Appeals following endorsement of a Stipulation of Judgment that required lines between the station and the street to be underground so as to allow above-ground wires to the tower on the site for property located at 299 Sheffield Street. On January 10, 2008, the CSC required that proposed coax be installed inside of the monopole. There were no other noted restrictions. It is SBA's opinion that this modification complies with all known conditions.

Please accept this letter as notification pursuant to Regulations of Connecticut State Agencies §16-50j-73, for construction that constitutes an exempt modification pursuant to R.C.S.A. §16.50j-72(b)(2). In accordance with R.C.S.A. § 16.50j-73, a copy of this letter is being sent to the City's Mayor, Neil M. O'Leary, and City Planner, James A. Sequin, as well as to the Property Owner. Separate notice is not being sent to tower owner, as it belongs to SBA.)

The planned modifications to the facility fall squarely within those activities explicitly provided for in R.C.S.A. §16.50j-72(b)(2).

1. The proposed modifications will not result in an increase in the height of the existing structure.
2. The proposed modification will not require the extension of the site boundary.
3. The proposed modifications will not increase noise levels at the facility by six decibels or more, or to levels that exceed state and local criteria.
4. The operation of the replacement antennas will not increase radio frequency emissions at the facility to a level at or above the Federal Communications Commission safety standard.
5. The proposed modification will not cause a change or alteration in the physical or environmental characteristics of the site.
6. The existing structure and its foundation can support the proposed loading.

For the foregoing reasons, Sprint respectfully submits that the proposed modifications to the above-referenced telecommunication facility constitute an exempt modifications under R.C.S.A. § 16-50j-72(b)(2).

Sincerely,



Kri Pelletier
Property Specialist
SBA COMMUNICATIONS CORPORATION
134 Flanders Rd., Suite 125
Westborough, MA 01581

508.251.0720 x3804 + T
508.366.2610 + F
203.446.7700 + C
kpelletier@sbsite.com



Attachments

cc: Neil M. O'Leary, Mayor / with attachments

City of Waterbury, City Hall Building, 235 Grand Street, Waterbury, CT 06702

James A. Sequin, AICP, City Planner / with attachments

City of Waterbury, City Hall Building, 235 Grand Street, Waterbury, CT 06702

Level Development Corporation / with attachments

293 Sheffield Street, Waterbury, CT 06704



POWER DENSITY

SPRINT Site Inventory and Power Data by Antenna

Sector:	A	Sector:	B	Sector:	C
Antenna #:	1	Antenna #:	1	Antenna #:	1
Make / Model:	KMW ETCR-654L12H6	Make / Model:	KMW ETCR-654L12H6	Make / Model:	KMW ETCR-654L12H6
Gain:	13.35 / 15.25 / 15.05 dBd	Gain:	13.35 / 15.25 / 15.05 dBd	Gain:	13.35 / 15.25 / 15.05 dBd
Height (AGL):	127 feet	Height (AGL):	127 feet	Height (AGL):	127 feet
Frequency Bands	850 MHz / 1900 MHz (PCS) / 2500 MHz (BRS)	Frequency Bands	850 MHz / 1900 MHz (PCS) / 2500 MHz (BRS)	Frequency Bands	850 MHz / 1900 MHz (PCS) / 2500 MHz (BRS)
Channel Count	18	Channel Count	18	Channel Count	18
Total TX Power(W):	380 Watts	Total TX Power(W):	380 Watts	Total TX Power(W):	380 Watts
ERP (W):	11,775.31	ERP (W):	11,775.31	ERP (W):	11,775.31
Antenna A1 MPE%	3.13 %	Antenna B1 MPE%	3.13 % <th>Antenna C1 MPE%</th> <td>3.13 %</td>	Antenna C1 MPE%	3.13 %

Site Composite MPE%	
Carrier	MPE%
SPRINT – Max per sector	3.13 %
AT&T	3.50 %
MetroPCS	0.53 %
Verizon Wireless	2.03 %
Clearwire	0.13 %
Nextel (decommissioned)	0.94 %
Site Total MPE %:	10.26 %

SPRINT Sector A Total:	3.13 %
SPRINT Sector B Total:	3.13 %
SPRINT Sector C Total:	3.13 %
Site Total:	10.26 %

SPRINT – Frequency Band / Technology (All Sectors)	# Channels	Watts ERP (Per Channel)	Height (feet)	Total Power Density ($\mu\text{W}/\text{cm}^2$)	Frequency (MHz)	Allowable MPE ($\mu\text{W}/\text{cm}^2$)	Calculated % MPE
Sprint 850 MHz CDMA	1	432.54	127	1.06	850 MHz	567	0.19%
Sprint 850 MHz LTE	2	432.54	127	2.12	850 MHz	567	0.37%
Sprint 1900 MHz (PCS) CDMA	5	535.94	127	6.58	1900 MHz (PCS)	1000	0.66%
Sprint 1900 MHz (PCS) LTE	2	1,339.86	127	6.58	1900 MHz (PCS)	1000	0.66%
Sprint 2500 MHz (BRS) LTE	8	639.78	127	12.57	2500 MHz (BRS)	1000	1.25%
						Total:	3.13%

City of Waterbury G.I.S.

Home Search Maps Downloads GIS Site Help

Property Search

[Print Info](#)

Location: 293 SHEFFIELD ST Owner: LEVEL DEVELOPMENT CORPORATION

City Wide Maps

[Assessor Info](#)

[Highslide JS](#)



GIS Data Download

[Building Info](#)

[Property Value](#)

[Sales History](#)

[Permit Info](#)

[Property Maps](#)

Map Block Lot: 0047-0983-0005

Acres: 0.16

Primary Use: Residential

Zone: RL

Neighborhood: 41000-Buck's Hill

Vol/Page: 5764 / 155

Live GIS Mapping Sites

[eQuality Site](#)

LEVEL DEVELOPMENT CORPORATION

Mailing Address: 293 SHEFFIELD ST
WATERBURY, CT 06704

Links

[Back](#)

WTBY REVALUATION 2012

Card No: 1 of 1

UNIQUE ID: 004709830006

LOCATION:	SHEFFIELD ST	Map/Block/Lot:	0047-0983-0006	Date Printed:	08/23/2016			
911 ADDRESS:		Zoning:	RL	Neighborhood:	85000	Last Update:	04/11/2016	
OWNER OF RECORD		VOLUME/PAGE	DATE	SALES TYPE		VALID	SELLING PRICE	
LEVEL DEVELOPMENT CORPORATION		5739 231	Apr/25/2006	Quit Claim		NO	0	
Care of: 293 SHEFFIELD ST WATERBURY CT 06704								
HYCHKO JOHN								
THIS DOCUMENT WAS PREPARED FOR ASSESSMENT PURPOSES ONLY								
Revaluation Date: 10/01/2012								
PERMIT NUMBER	DATE	COST	NEW HSE	STATUS	% COMP.	CO ISSUED	DATE OF CERT	REASON FOR CHANGE
2013.0309	Aug/09/2013	0	NO	Open	0			REPLACE EXISTING 6X6 PAD WITH 9X10 CONCRETE P
2012.1784	Jun/29/2012	15,000	NO	Closed	100			REPLACE 6 ANTENNAS ON TOWER/SUPPORT EQUIPM
STATE ITEM CODES								
Census	Code	Quantity	Value	Code	Quantity	Value	APPRaised VALUE	
Dev Map	53	25.00	622,390				889,132	
Dev Lot	55	1.00	2,090				0	
Inspection Date	01/23/2013						Total Outbuilding Value 2,980	
Inspector							Total Market Value 892,112	
Data Entry								
ACRES								
Land Type	Acres	490	Rate	Adj	Influence	Total Value	INFLUENCE FACTORS	
Primary Site	25.00	0.00	117,610	0.36	-16	889,132	Land Type Influence Reason Comment	
Total	25.00					889,132		
ASSESSMENT HISTORY (PRIOR YEARS AS OF OCT 1)								
LAND SUMMARY								
Current	2015	2014	2013	2012				
Land	622,390	622,390	622,390	622,390	622,390			
Building	0	0	0	0	0	Land If 490 not applied	889,132	
Outbuilding	2,090	2,090	2,090	2,090	2,090			
Total	624,480	624,480	624,480	624,480	624,480			
COMMENTS								

Kri Pelletier

From: David Dietsch <ddietsch@waterburyct.org>
Sent: Tuesday, August 23, 2016 11:32 AM
To: Kri Pelletier
Subject: RE: 299 Sheffield Street
Attachments: Sheffield St.pdf

Hi Kri,

I attached the field card for the property we carry the tower on.

David M. Dietsch CCMA II
Assessor
City of Waterbury
235 Grand Street
Waterbury, CT 06704
203 574-8056
203 574-6993 fax

From: Kri Pelletier [mailto:KPelletier@sbasite.com]
Sent: Monday, August 22, 2016 4:46 PM
To: David Dietsch <ddietsch@waterburyct.org>
Subject: RE: 299 Sheffield Street

Hi David,

Following up on the below.

Thank you,

Kri Pelletier
Property Specialist

508.251.0720 x 3804 + T
508.366.2610 + F
203.446.7700 + C
kpelletier@sbasite.com

From: Kri Pelletier
Sent: Tuesday, August 16, 2016 4:42 PM
To: 'ddietsch@waterburyct.org' <ddietsch@waterburyct.org>
Subject: 299 Sheffield Street

Good Afternoon David,

On behalf of AT&T we're readying building permit materials for antenna upgrades at the existing cell site at **299 Sheffield St.** Prior to applying for a building permit we are to apply for zoning approval through the CT Siting Council. The CSC requires a printout of property card showing current land owner. (SBA owns the cell tower, but not the land).

Our internal SBA records show the property owner (and payee) as John Hychko, however it does not come up on the GIS search (he does, however, come up at 285 Sheffield Street – but that is not the location of the tower.) We also have notes indicating a transfer of ownership to Jon-Mar, but cannot find a property card for that entity, either.

- Could you please advise as to the current and correct property owner for 299 Sheffield Street so that we may supply to the Siting Council and update any internal records.

Thank you,

Kri Pelletier
Property Specialist



SBA COMMUNICATIONS CORPORATION
134 Flanders Rd., Suite 125
Westborough, MA 01581

508.251.0720 x 3804 + T
508.366.2610 + F
203.446.7700 + C
kpelletier@sbasite.com

Your Signal Starts Here.

ORIGIN ID:BBFA
RICK WOODS
SBA NETWORK SERVICES INC
134 FLANDERS ROAD
SUITE 125
WESTBOROUGH, MA 01581
UNITED STATES US

(508) 614-0389

SHIP DATE: 20DEC17
ACT WT: 1.00 LB
CAD: 105843304/NET3920

BILL SENDER

To THE HONORABLE NEIL M. O'LEARY

CITY OF WATERBURY

OFFICE OF THE MAYOR-CITY HALL BLDG.


235 GRAND STREET

WATERBURY CT 06702

PO: (508) 251-0720 X 3804

REF: 105592009-6089
DEPT:


549J1574C/104C

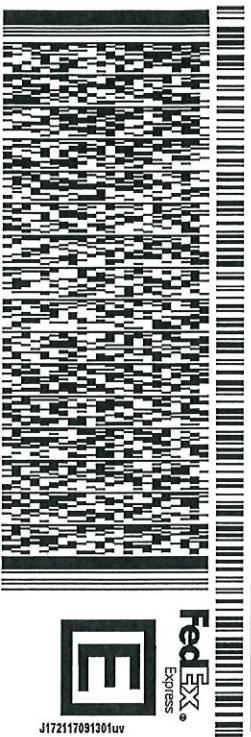

THU - 21 DEC 10:30A
PRIORITY OVERNIGHT

TRK#
0201 7710 5066 9120

06702
CT-US
BDL
EB BNHA

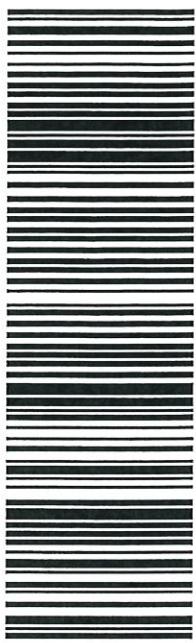

After printing this label:

1. Use the 'Print' button on this page to print your label to your laser or inkjet printer.
2. Fold the printed page along the horizontal line.
3. Place label in shipping pouch and affix it to your shipment so that the barcode portion of the label can be read and scanned.

Warning: Use only the printed original label for shipping. Using a photocopy of this label for shipping purposes is fraudulent and could result in additional billing charges, along with the cancellation of your FedEx account number.

Use of this system constitutes your agreement to the service conditions in the current FedEx Service Guide, available on fedex.com. FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1,000, e.g. jewelry, precious metals, negotiable instruments and other items listed in our ServiceGuide. Written claims must be filed within strict time limits, see current FedEx Service Guide.

ORIGIN ID:BBFA (508) 614-0389
 RICK WOODS
 SBA NETWORK SERVICES INC
 134 FLANDERS ROAD
 SUITE 125
 WESTBOROUGH, MA 01581
 UNITED STATES US

SHIP DATE: 20DEC17
 ACT/WGT: 1.00LB
 CAD: 105843304/NET3920
 BILL SENDER

TO JAMES SEQUIN, AICP, CITY PLANNER
 CITY OF WATERBURY


CITY HALL BUILDING
 235 GRAND STREET

WATERBURY CT 06702

(508)251-0720 X3804

REF: 1056-92009-6089
 PO:
 DEPT:


549J1574C/104C

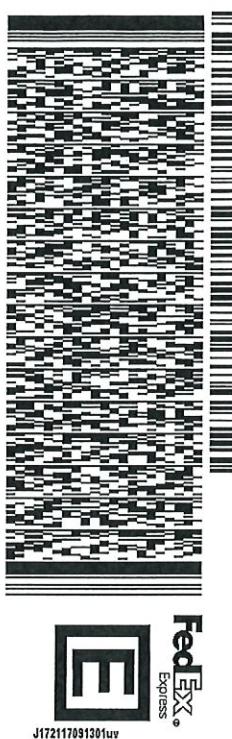

THU - 21 DEC 10:30A
 PRIORITY OVERNIGHT

TRK# 7710 5069 1420
 0201

06702
 EB BNHA
 CT-US
 BDL

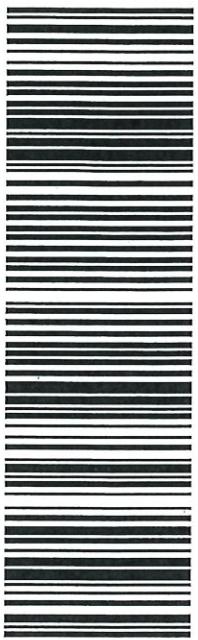

After printing this label:

1. Use the 'Print' button on this page to print your label to your laser or inkjet printer.
2. Fold the printed page along the horizontal line.
3. Place label in shipping pouch and affix it to your shipment so that the barcode portion of the label can be read and scanned.

Warning: Use only the printed original label for shipping. Using a photocopy of this label for shipping purposes is fraudulent and could result in additional billing charges, along with the cancellation of your FedEx account number.

Use of this system constitutes your agreement to the service conditions in the current FedEx Service Guide, available on fedex.com. FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1,000, e.g. jewelry, precious metals, negotiable instruments and other items listed in our Service Guide. Written claims must be filed within strict time limits, see current FedEx Service Guide.

ORIGIN ID:BBFA
RICK WOODS
SBM NETWORK SERVICES INC
134 FLANDERS ROAD
SUITE 125
WESTBOROUGH, MA 01581
UNITED STATES US



RADIO FREQUENCY EMISSIONS ANALYSIS REPORT EVALUATION OF HUMAN EXPOSURE POTENTIAL TO NON-IONIZING EMISSIONS

SPRINT Existing Facility

Site ID: CT52XC053

Waterbury North
299 Sheffield Street
Waterbury, CT 06704

December 14, 2017

EBI Project Number: 6217005633

Site Compliance Summary	
Compliance Status:	COMPLIANT
Site total MPE% of FCC general population allowable limit:	10.26 %



December 14, 2017

SPRINT
Attn: RF Engineering Manager
1 International Boulevard, Suite 800
Mahwah, NJ 07495

Emissions Analysis for Site: **CT52XC053 – Waterbury North**

EBI Consulting was directed to analyze the proposed SPRINT facility located at **299 Sheffield Street, Waterbury, CT**, for the purpose of determining whether the emissions from the Proposed SPRINT Antenna Installation located on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01 and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The number of $\mu\text{W}/\text{cm}^2$ calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits, therefore it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) – (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

General population/uncontrolled exposure limits apply to situations in which the general population may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general population would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Public exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The general population exposure limits for the 850 MHz Band is approximately 567 $\mu\text{W}/\text{cm}^2$. The general population exposure limit for the 1900 MHz (PCS) and 2500 MHz (BRS) bands is 1000 $\mu\text{W}/\text{cm}^2$. Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.



Occupational/controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

CALCULATIONS

Calculations were done for the proposed SPRINT Wireless antenna facility located at **299 Sheffield Street, Waterbury, CT**, using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. Since SPRINT is proposing highly focused directional panel antennas, which project most of the emitted energy out toward the horizon, all calculations were performed assuming a lobe representing the maximum gain of the antenna per the antenna manufacturers supplied specifications, minus 10 dB, was focused at the base of the tower. For this report the sample point is the top of a 6-foot person standing at the base of the tower.

For all calculations, all equipment was calculated using the following assumptions:

- 1) 1 CDMA channels (850 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 20 Watts per Channel.
- 2) 2 LTE channels (850 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 20 Watts per Channel.
- 3) 5 CDMA channels (1900 MHz (PCS)) were considered for each sector of the proposed installation. These Channels have a transmit power of 16 Watts per Channel.
- 4) 2 LTE channels (1900 MHz (PCS)) were considered for each sector of the proposed installation. These Channels have a transmit power of 40 Watts per Channel.
- 5) 8 LTE channels (2500 MHz (BRS)) were considered for each sector of the proposed installation. These Channels have a transmit power of 20 Watts per Channel.



- 6) All radios at the proposed installation were considered to be running at full power and were uncombined in their RF transmissions paths per carrier prescribed configuration. Per FCC OET Bulletin No. 65 - Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. This is rarely the case, and if so, is never continuous.
- 7) For the following calculations, the sample point was the top of a 6-foot person standing at the base of the tower. The maximum gain of the antenna per the antenna manufactures supplied specifications minus 10 dB was used in this direction. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 8) The antennas used in this modeling are the **KMW ETCR-654L12H6** for transmission in the 850 MHz, 1900 MHz (PCS) and 2500 MHz (BRS) frequency bands. This is based on feedback from the carrier with regards to anticipated antenna selection. Maximum gain values for all antennas are listed in the Inventory and Power Data table below. The maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was used for all calculations. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 9) The antenna mounting height centerlines of the proposed antennas are **127 feet** above ground level (AGL) for **Sector A**, **127 feet** above ground level (AGL) for **Sector B** and **127 feet** above ground level (AGL) for Sector C.
- 10) Emissions values for additional carriers were taken from the Connecticut Siting Council active database. Values in this database are provided by the individual carriers themselves.

All calculations were done with respect to uncontrolled / general population threshold limits.



SPRINT Site Inventory and Power Data by Antenna

Sector:	A	Sector:	B	Sector:	C
Antenna #:	1	Antenna #:	1	Antenna #:	1
Make / Model:	KMW ETCR-654L12H6	Make / Model:	KMW ETCR-654L12H6	Make / Model:	KMW ETCR-654L12H6
Gain:	13.35 / 15.25 / 15.05 dBd	Gain:	13.35 / 15.25 / 15.05 dBd	Gain:	13.35 / 15.25 / 15.05 dBd
Height (AGL):	127 feet	Height (AGL):	127 feet	Height (AGL):	127 feet
Frequency Bands	850 MHz / 1900 MHz (PCS) / 2500 MHz (BRS)	Frequency Bands	850 MHz / 1900 MHz (PCS) / 2500 MHz (BRS)	Frequency Bands	850 MHz / 1900 MHz (PCS) / 2500 MHz (BRS)
Channel Count	18	Channel Count	18	Channel Count	18
Total TX Power(W):	380 Watts	Total TX Power(W):	380 Watts	Total TX Power(W):	380 Watts
ERP (W):	11,775.31	ERP (W):	11,775.31	ERP (W):	11,775.31
Antenna A1 MPE%	3.13 %	Antenna B1 MPE%	3.13 %	Antenna C1 MPE%	3.13 %

Site Composite MPE%	
Carrier	MPE%
SPRINT – Max per sector	3.13 %
AT&T	3.50 %
MetroPCS	0.53 %
Verizon Wireless	2.03 %
Clearwire	0.13 %
Nextel (decommissioned)	0.94 %
Site Total MPE %:	10.26 %

SPRINT Sector A Total:	3.13 %
SPRINT Sector B Total:	3.13 %
SPRINT Sector C Total:	3.13 %
Site Total:	10.26 %

SPRINT _ Frequency Band / Technology (All Sectors)	# Channels	Watts ERP (Per Channel)	Height (feet)	Total Power Density ($\mu\text{W}/\text{cm}^2$)	Frequency (MHz)	Allowable MPE ($\mu\text{W}/\text{cm}^2$)	Calculated % MPE
Sprint 850 MHz CDMA	1	432.54	127	1.06	850 MHz	567	0.19%
Sprint 850 MHz LTE	2	432.54	127	2.12	850 MHz	567	0.37%
Sprint 1900 MHz (PCS) CDMA	5	535.94	127	6.58	1900 MHz (PCS)	1000	0.66%
Sprint 1900 MHz (PCS) LTE	2	1,339.86	127	6.58	1900 MHz (PCS)	1000	0.66%
Sprint 2500 MHz (BRS) LTE	8	639.78	127	12.57	2500 MHz (BRS)	1000	1.25%
Total:							3.13%



Summary

All calculations performed for this analysis yielded results that were **within** the allowable limits for general population exposure to RF Emissions.

The anticipated maximum composite contributions from the SPRINT facility as well as the site composite emissions value with regards to compliance with FCC's allowable limits for general population exposure to RF Emissions are shown here:

SPRINT Sector	Power Density Value (%)
Sector A:	3.13 %
Sector B:	3.13 %
Sector C:	3.13 %
SPRINT Maximum Total (per sector):	3.13 %
Site Total:	10.26 %
Site Compliance Status:	COMPLIANT

The anticipated composite MPE value for this site assuming all carriers present is **10.26 %** of the allowable FCC established general population limit sampled at the ground level. This is based upon values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.



Tower Engineering Solutions

Phone (972) 483-0607, Fax (972) 975-9615
8445 Freeport Parkway, Suite 375, Irving, Texas 75063

Structural Analysis Report

Existing 158 ft. SUMMIT Monopole

Customer Name: SBA Communications Corp

Customer Site Number: CT02722-S

Customer Site Name: Waterbury

Carrier Name: Sprint Nextel

Carrier Site ID / Name: CT52XC053 / Waterbury North

Site Location: 299 Sheffield Street

Waterbury, Connecticut

New Haven County

Latitude: 41.594089

Longitude: -73.050567

Analysis Result:

Max Structural Usage: 69.7% [Pass]

Max Foundation Usage: 54.0% [Pass]

Report Prepared By : Delu Zhou



10/17/17

Introduction

The purpose of this report is to summarize the analysis results on the 158 ft. SUMMIT Monopole to support the proposed antennas and transmission lines in addition to those currently installed. Any modification listed under Sources of Information was assumed completed and was included in this analysis.

Sources of Information

Tower Drawings	Summit Manufacturing, LLC. DWG.No. 9302-01, dated 08/23/2000.
Foundation Drawing	Summit Manufacturing, LLC. Job No. 9302-A530, dated 08/23/2000.
Geotechnical Report	N/A
Modification Drawings	N/A

Analysis Criteria

The rigorous analysis was performed in accordance with the requirements and stipulations of the ANSI/TIA/EIA 222-G. In accordance with this standard, the structure was analyzed using **TESPoles**, a proprietary analysis software. The program considers the structure as an elastic 3-D model with second-order effects and temperature effects incorporated in the analysis. The analysis was performed using multiple wind directions.

Wind Speed Used in the Analysis:	Ultimate Design Wind Speed V_{ult} = 125.0 mph (3-Sec. Gust)/ Nominal Design Wind Speed V_{asd} = 97.0 mph (3-Sec. Gust)
Wind Speed with Ice:	50 mph (3-Sec. Gust) with 3/4" radial ice concurrent
Operational Wind Speed:	60 mph + 0" Radial ice
Standard/Codes:	ANSI/TIA/EIA 222-G / 2012 IBC / 2016 Connecticut State Building Code
Exposure Category:	C
Structure Class:	II
Topographic Category:	1
Crest Height:	0 ft.
Seismic Parameters:	$S_S = 0.189, S_1 = 0.064$

Existing Antennas, Mounts and Transmission Lines

The table below summarizes the antennas, mounts and transmission lines that were considered in the analysis as existing on the tower.

Items	Elevation (ft.)	Qty.	Antenna Descriptions	Mount Type & Qty.	Transmission Lines	Owner
1	158.0	3	RFS APXV18-206517S-C	(1) Low Profile Platform	(6) 1-5/8"	MetroPCS
2	148.0	1	Andrew - LNX-4514DS-A1M - Panel	(1) Low Profile Platform	(12) 1-5/8" (1) 1-5/8" Hybrid	Verizon
3		2	Andrew - LNX-6514DS-A1M - Panel			
4		6	Andrew - DB844G65VTZASX - Panel			
5		6	Commscope - HBXX-6517DS-A2M - Panel			
6		3	Alcatel - RRH4X45-AWS – RRH			
7		3	Alcatel - RRH2X60-PCS – RRH			
8		1	RFS - DB-T1-6Z-8AB-0Z - COVP			
9		3	Quintel QS66512-2 – Panel			
10	137.0	3	CCI HPA-65R-BUU-H8 – Panel	(1) Platform w/ Hand Rails (Commscope P/N MTC3607)	(12) 1-5/8" Coax (2) 1/2" Fiber (4) 3/4" DC	AT&T
11		3	CCI OPA-65R-LCUU-H6 – Panel			
12		3	KMW AM-X-CD-16-65-OOT – Panel			
13		6	CCI DTMABP7819VG12A – TMA			
14		6	Ericsson RRUS-11 – RRU			
15		6	Ericsson RRUS-12 – RRU			
16		3	Ericsson RRUS 32 B2 – RRU			
17		3	Ericsson RRUS-32 – RRU			
18		6	Ericsson RRU A2 – RRU			
19		3	Raycap DC6-48-60-18-8F			
-	127.0	2	Dragonwave A-ANT-23G-2.0-C – Dish	(1) Low Profile Platform	(12) 1-1/4" (6) 5/16" (2) 1/2"	Sprint/ Clearwire
-		9	Decibel DB844H90E-XY – Panel			
-		3	Argus LLPX310R			
-		3	Samsung U-RAS – RRH			
26	122.0	1	Nokia CS72188.01 – Omni	Direct Mount	(1) 1/2" Coax	AT&T

Proposed Carrier's Final Configuration of Antennas, Mounts and Transmission Lines

Information pertaining to the proposed carrier's final configuration of antennas and transmission lines was provided by SBA Communications Corp. The proposed antennas and lines are listed below.

Items	Elevation (ft.)	Qty.	Antenna Descriptions	Mount Type & Qty.	Transmission Lines	Owner
20	127.0	3	KMW/ ETCR-654L12H6 - Panel	Platform w/ Handrails w/ Reinforcement [HRK-14/PRK-1245L]	(4) 1-1/4" Fiber (12) 1-1/4" (2) 1/2"	Sprint Nextel
21		9	Decibel/ DB844H90E-XY - Panel			
22		2	DragonWave/ A-ANT-23G-2.0-C - Dish			
23		3	ALU/ 1900MHz - RRH			
24		6	ALU/ 800 MHz - RRH			
25		3	ALU/ TD-RRH8x20-25 - RRU			

All transmission lines are considered running inside of the pole shafts.

Analysis Results

The results of the structural analysis, performed for the wind and ice loading and antenna equipment as defined above, are summarized as the following:

	Pole shafts	Anchor Bolts	Base Plate
Max. Usage:	69.7%	66.9%	49.1%
Pass/Fail	Pass	Pass	Pass

Foundations

	Moment (Kip-Ft)	Shear (Kips)
Original Design Reactions	5150.0	44.0
Analysis Reactions	4622.6	39.8
Factored Reactions*	6952.5	59.4
% of Design Reactions	66.5%	67.0%

* Per section 15.5.1 of the TIA-222-G standard, factored reactions were obtained by multiplying a 1.35 factor to the original design reactions.

The foundation has been investigated using the supplied documents and soils report and was found adequate. Therefore, no modification to the foundation will be required.

Operational Condition (Rigidity):

The maximum twist and sway of the microwave dishes under the operational wind speed as specified in the Analysis Criteria are listed in the table below:

Elevation (ft.)	Antenna / Dish	Carrier	Twist (deg.)	Sway (deg.)
127.0	DragonWave/ A-ANT-23G-2.0-C - Dish	Sprint Nextel	0.000	1.165

It is recommended that the carriers review the twist and sway values of the microwave dishes.

Conclusions

Based on the analysis results, the existing structure and its foundation were found to be adequate to safely support the existing and proposed equipment and meet the minimum requirements per the ANSI/TIA/EIA 222-G Standard under the design basic wind speed as specified in the Analysis Criteria.

Antenna Mount Note:

The new proposed mount contributes 2.0% of additional stress to the tower structure.

Standard Conditions

1. This analysis was performed based on the information supplied to **(TES) Tower Engineering Solutions, LLC**. Verification of the information provided was not included in the Scope of Work for **TES**. The accuracy of the analysis is dependent on the accuracy of the information provided.
2. The analysis is based on the presumption that the tower members and components along with any existing reinforcement items have been correctly and properly designed, manufactured, installed and maintained.
3. All the existing structural members were assumed to be in good condition with no physical damage or deterioration associated with corrosion.
4. An initial tension of 10% of the break strength on all the existing guy wires was assumed in all the structural analyses of guyed towers unless different values were provided by the client. **TES** cannot take responsibility for the deviations in the analysis results because of differences in the initial tension forces of the existing guy wires.
5. Secondary component or connection secondary components, welds and bolts are assumed to be able to carry their intended original design loads. **TES** cannot take responsibility for verification of the adequacy on the connections, bolts and welds present in the structure.
6. The analyses will be performed based on the codes as specified by the client or based on the best knowledge of the engineering staff of **TES**. In the absence of information to the contrary, all work will be performed in accordance with the latest relevant revision of ANSI/TIA-222. If wind speed and/or ice loads are different from the minimum values recommended by the EIA/TIA-222 standard or other codes, **TES** should be notified in writing and the applicable minimum values provided by the client.
7. The configuration of the existing mounts, antennas, coax and other appurtenances were supplied by the customer for the current structural analysis. **TES** has not visited the tower site to verify the adequacy of the information provided. If there is any discrepancy found in the report regarding the existing conditions, **TES** should be notified immediately to evaluate the effect of the discrepancy on the analysis results.
8. The client will assume responsibility for rework associated with the differences in initially provided information, including tower and foundation information, existing and/or proposed equipment and transmission lines.
9. If a feasibility analysis was performed, final acceptance of changed conditions shall be based upon a rigorous structural analysis.

Usage Diagram - Max Ratio 69.66% at 83.5ft

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)

Code: EIA/TIA-222-G
Exposure: C
G_h: 1.1

10/17/2017



Page: 1


Dead Load Factor: 1.20
Wind Load Factor: 1.60

Load Case : 1.2D + 1.6W 97 mph Wind



Iterations: 23

Copyright © 2017 by Tower Engineering Solutions, LLC. All rights reserved.

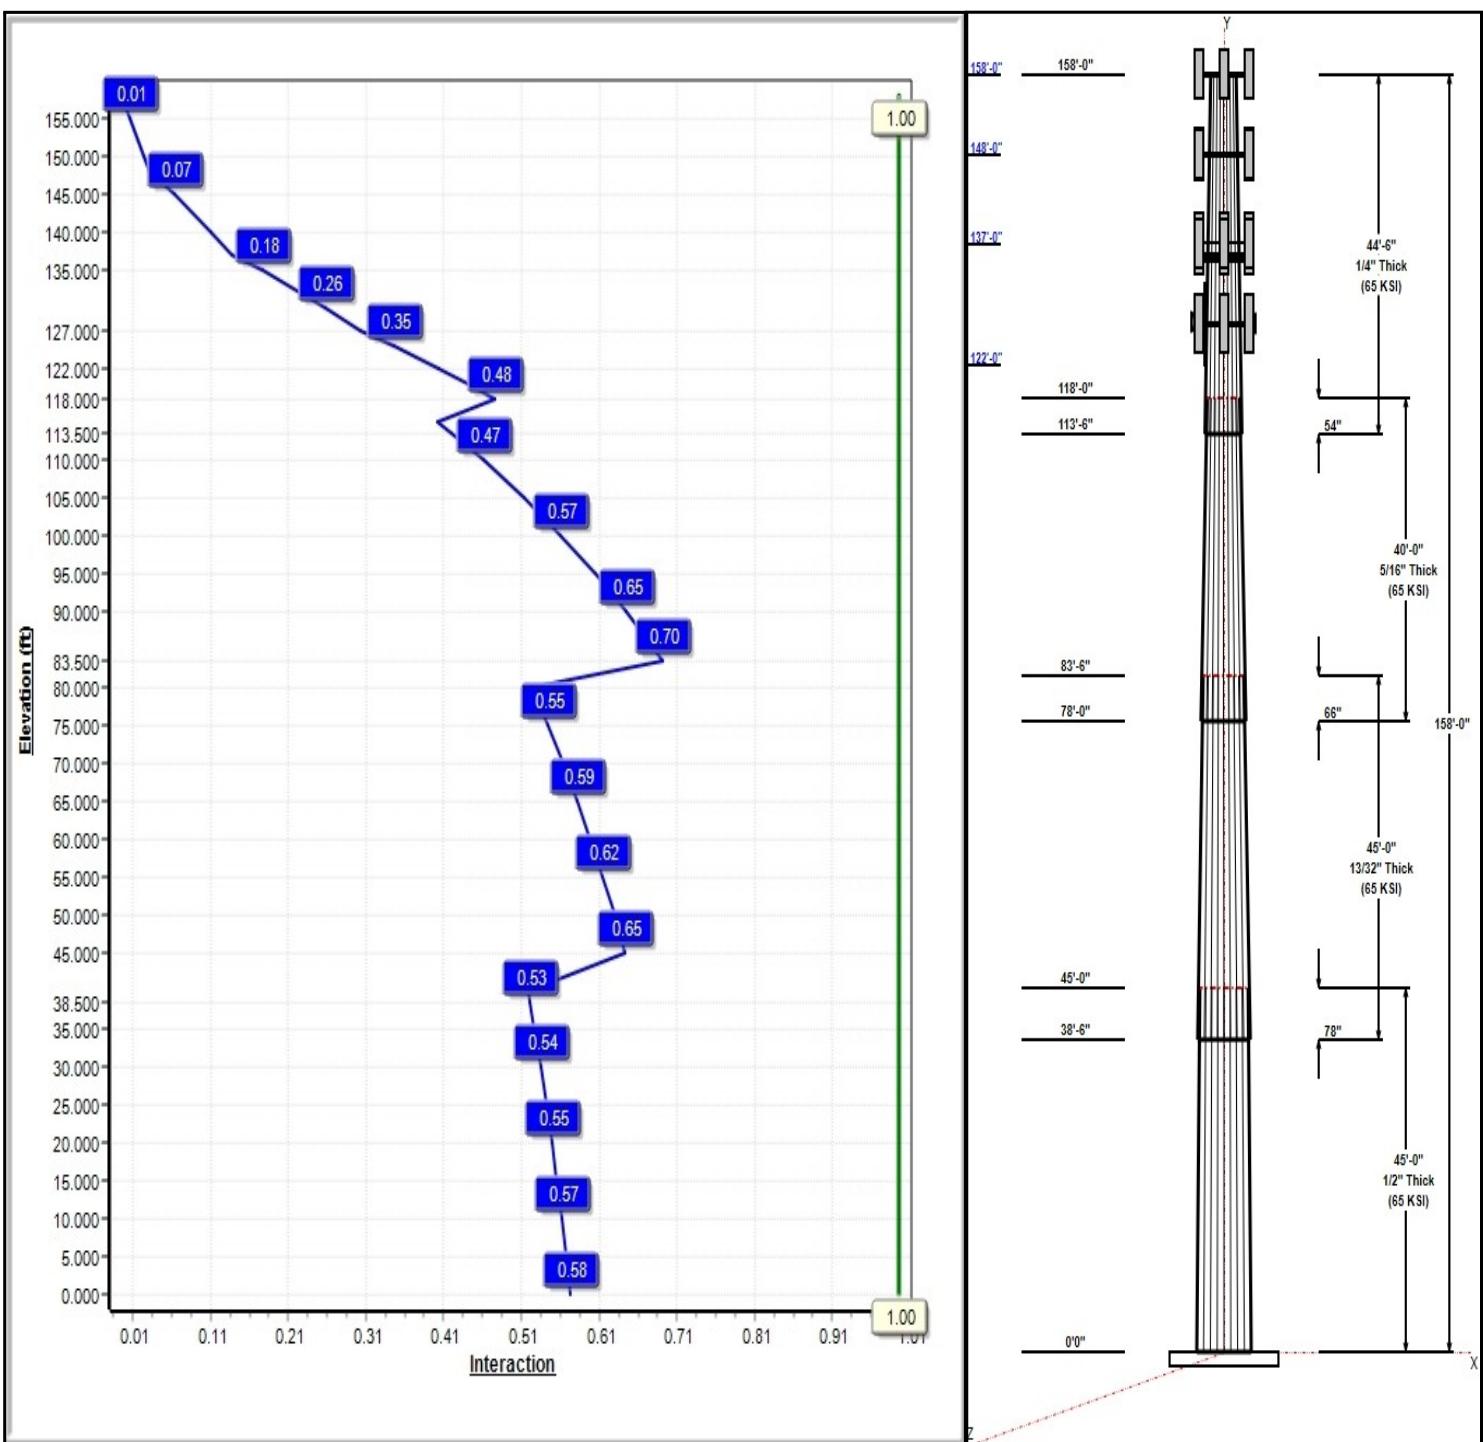

Structure: CT02722-S-SBA

Type: Tapered
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.00 (ft)

Base Shape: 18 Sided
Taper: 0.23998

10/17/2017

Page: 2



Shaft Properties

Seq	Length (ft)	Top (in)	Bottom (in)	Thick (in)	Joint Type	Taper	Grade (ksi)
1	45.00	49.18	59.98	0.500		0.23998	65
2	45.00	40.75	51.55	0.406	Slip	0.23998	65
3	40.00	33.10	42.70	0.313	Slip	0.23998	65
4	44.50	24.00	34.68	0.250	Slip	0.23998	65


Discrete Appurtenances

Attach Elev (ft)	Force Elev (ft)	Qty	Description	Carrier
158.00	158.00	3	APXV18-206517S-C	Metro PCS
158.00	158.00	1	Low Profile Platform	Metro PCS
148.00	148.00	6	HBXX-6517DS-A2M	Verizon
148.00	148.00	6	DB844G65VTZASX	Verizon
148.00	148.00	1	LNX-4514DS-A1M	Verizon
148.00	148.00	2	LNX-6514DS-A1M	Verizon
148.00	148.00	1	DB-T1-6Z-8AB-0Z	Verizon
148.00	148.00	3	RRH4X45-AWS	Verizon
148.00	148.00	3	RRH2X60-PCS	Verizon
148.00	148.00	1	Low Profile Platform	Verizon
137.00	137.00	3	CCI HPA-65R-BUU-H8	AT&T
137.00	137.00	6	CCI DTMABP7819VG12A	AT&T
137.00	137.00	6	Ericsson RRUS-11	AT&T
137.00	137.00	6	Ericsson RRUS-12	AT&T
137.00	137.00	3	CCI OPA-65R-LCUU-H6	AT&T
137.00	137.00	3	KMW	AT&T
137.00	137.00	3	Ericsson RRUS 32 B2	AT&T
137.00	137.00	6	Ericsson RRU A2	AT&T
137.00	137.00	3	Ericsson RRUS-32	AT&T
137.00	137.00	3	Quintel QS66512-2	AT&T
137.00	137.00	3	DC6-48-60-18-8F	AT&T
137.00	137.00	1	Platform w/ Hand Rails	AT&T
127.00	127.00	9	Decibel/ DB844H90E-XY	Sprint Nextel
127.00	127.00	2	DragonWave/	Sprint Nextel
127.00	127.00	3	KMW/ ETCR-654L12H6	Sprint Nextel
127.00	127.00	3	ALU/ 1900MHz - RRH	Sprint Nextel
127.00	127.00	6	ALU/ 800 MHz - RRH	Sprint Nextel
127.00	127.00	3	ALU/ TD-RRH8x20-25 -	Sprint Nextel
127.00	127.00	1	Platform w/ Handrails	Sprint Nextel
122.00	127.00	1	CS72188.01 Omni	AT&T

Linear Appurtenances

Elev From (ft)	Elev To (ft)	Placement	Description	Carrier
0.00	158.00	Inside	1-5/8"	Metro PCS
0.00	148.00	Inside	1-5/8"	Verizon
0.00	148.00	Inside	1-5/8" Hybrid	Verizon
0.00	137.00	Inside	1-5/8" Coax	AT&T
0.00	137.00	Inside	1/2" Fiber	AT&T
0.00	137.00	Inside	3/4" DC	AT&T
0.00	127.00	Inside	1-1/4"	Sprint Nextel
0.00	127.00	Inside	1-1/4" Fiber	Sprint Nextel
0.00	127.00	Inside	1/2"	Sprint Nextel
0.00	122.00	Inside	1/2" Coax	AT&T

Anchor Bolts

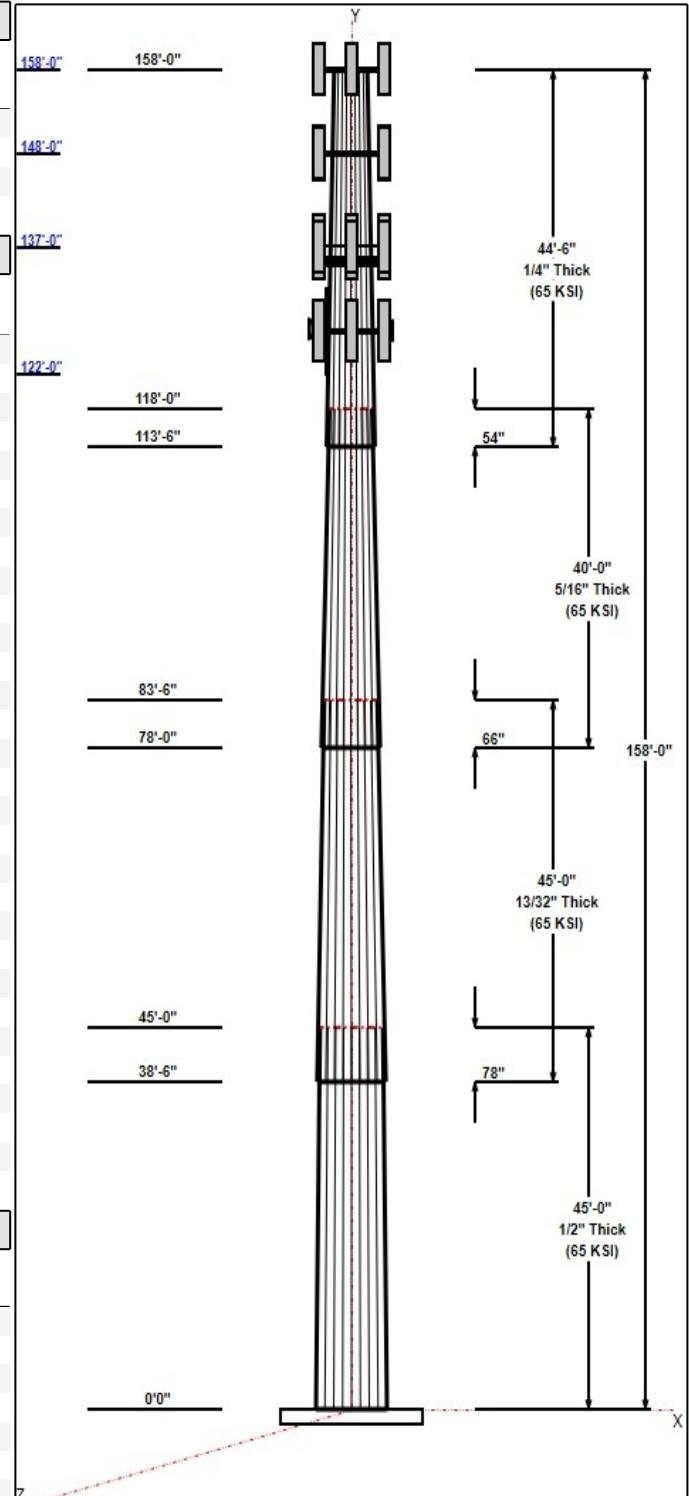

Structure: CT02722-S-SBA

Type: Tapered
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.00 (ft)

Base Shape: 18 Sided
Taper: 0.23998

10/17/2017

Page: 3



Qty	Specifications	Grade (ksi)	Arrangement
20	2.25" 18J	75.0	Cluster

Base Plate

Thickness (in)	Specifications (in)	Grade (ksi)	Geometry
3.2500	66.0	60.0	Clipped

Reactions


Load Case	Moment (FT-Kips)	Shear (Kips)	Axial (Kips)
1.2D + 1.6W 97 mph Wind	4622.6	39.8	57.7
0.9D + 1.6W 97 mph Wind	4582.4	39.8	43.2
1.2D + 1.0Di + 1.0Wi 50 mph Wind	1263.7	11.0	86.4
1.2D + 1.0E	227.1	2.0	57.7
0.9D + 1.0E	224.9	2.0	43.3
1.0D + 1.0W 60 mph Wind	1100.2	9.5	48.1

Structure: CT02722-S-SBA - Coax Line Placement

Type: Monopole
Site Name: Waterbury
Height: 158.00 (ft)

10/17/2017

Page: 4

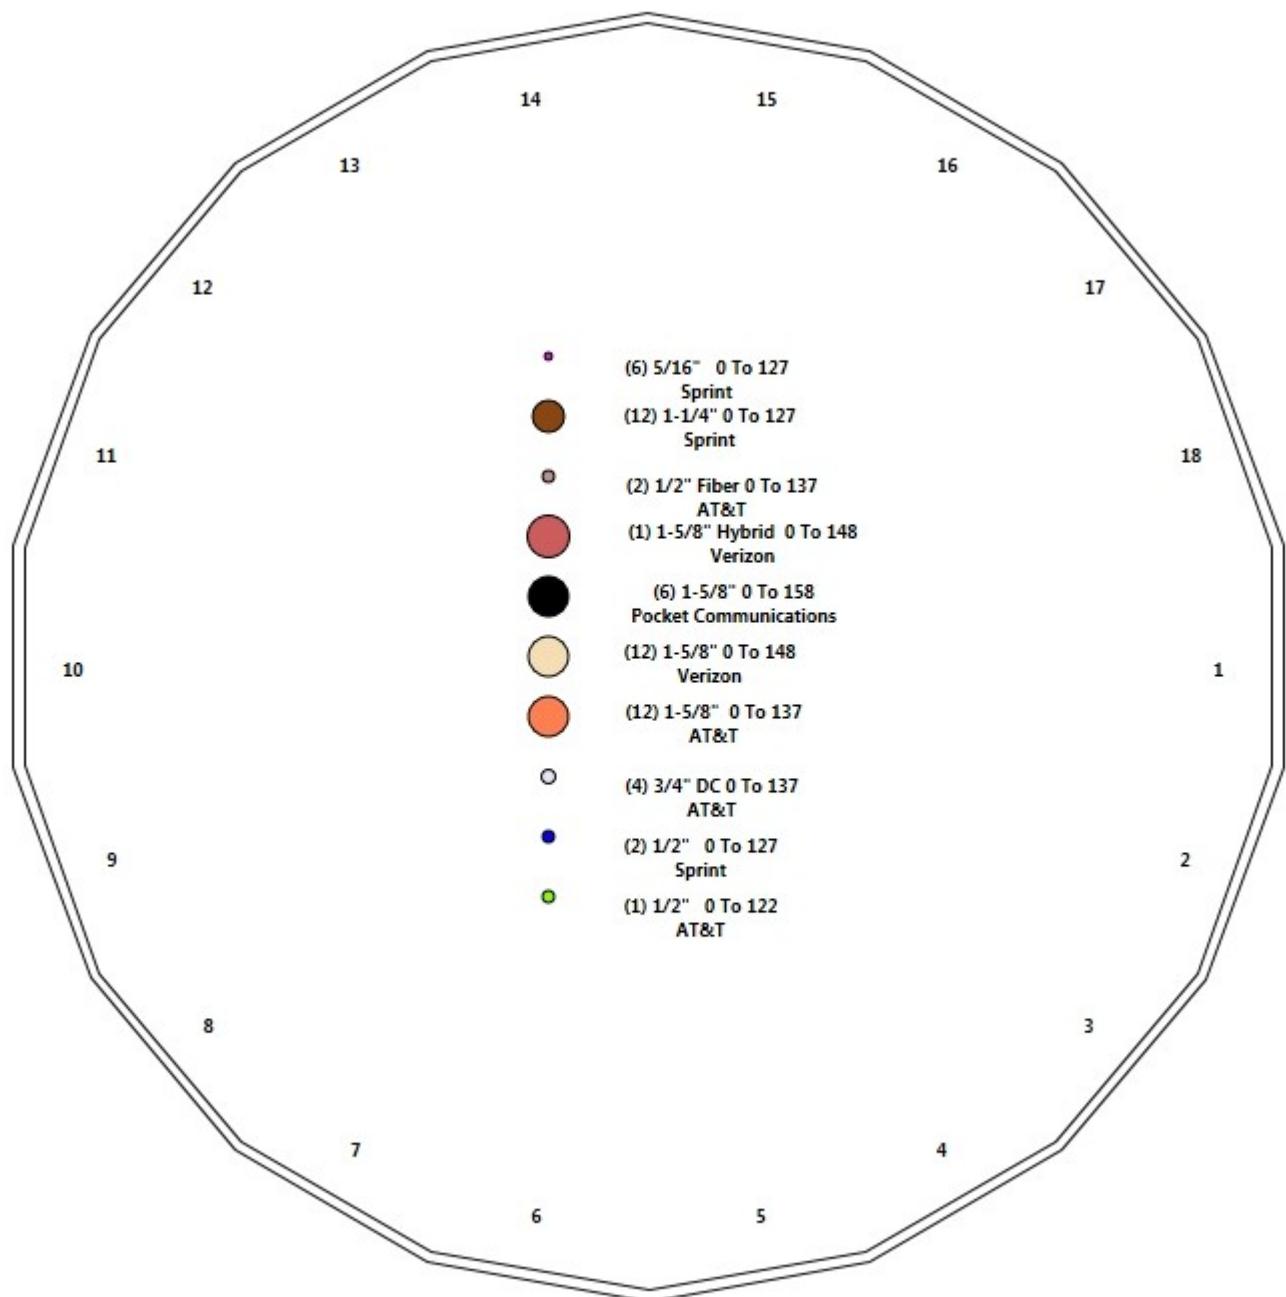

Shaft Properties

Structure: CT02722-S-SBA

Code: EIA/TIA-222-G

10/17/2017

Site Name: Waterbury

Exposure: C

Height: 158.00 (ft)

Crest Height: 0.00

Base Elev: 0.000 (ft)

Site Class: D - Stiff Soil

Gh: 1.1

Topography: 1

Struct Class: II

Page: 5



Tower Engineering Solutions

Sec. No.	Shape	Length (ft)	Thick (in)	Fy (ksi)	Joint Type	Overlap (in)	Weight (lb)
1	18	45.000	0.5000	65		0.00	13,142
2	18	45.000	0.4063	65	Slip	78.00	9,033
3	18	40.000	0.3125	65	Slip	66.00	5,074
4	18	44.500	0.2500	65	Slip	54.00	3,495
Total Shaft Weight:							30,744

Bottom

Sec. No.	Dia (in)	Elev (ft)	Area (sqin)	Ix (in^4)	W/t Ratio	D/t Ratio	Dia (in)	Elev (ft)	Area (sqin)	Ix (in^4)	W/t Ratio	D/t Ratio	Taper
1	59.98	0.00	94.39	42191.72	19.74	119.96	49.18	45.00	77.25	23130.4	15.93	98.36	0.239985
2	51.55	38.50	65.96	21799.61	20.96	126.88	40.75	83.50	52.03	10701.4	16.28	100.3	0.239985
3	42.70	78.00	42.04	9542.68	22.68	136.64	33.10	118.00	32.52	4416.67	17.27	105.9	0.239985
4	34.68	113.5	27.32	4091.38	23.05	138.72	24.00	158.00	18.84	1343.00	15.52	96.00	0.239985

Top

Load Summary

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Topography: 1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II

10/17/2017



Page: 6

Discrete Appurtenances

No.	Elev (ft)	Description	Qty	No Ice			Ice			Hor. Ecc. (ft)	Vert Ecc (ft)
				Weight (lb)	CaAa (sf)	CaAa Factor	Weight (lb)	CaAa (sf)	CaAa Factor		
1	158.00	APXV18-206517S-C	3	26.40	5.17	0.74	119.73	7.557	0.74	0.00	0.00
2	158.00	Low Profile Platform	1	1200.00	25.00	1.00	2252.58	46.052	1.00	0.00	0.00
3	148.00	HBXX-6517DS-A2M	6	40.80	8.55	0.77	216.81	11.465	0.77	0.00	0.00
4	148.00	DB844G65VTZASX	6	16.00	4.33	0.93	171.80	6.312	0.93	0.00	0.00
5	148.00	LNX-4514DS-A1M	1	29.54	6.79	0.71	132.24	8.825	0.71	0.00	0.00
6	148.00	LNX-6514DS-A1M	2	38.80	8.17	0.83	216.68	10.989	0.83	0.00	0.00
7	148.00	DB-T1-6Z-8AB-0Z	1	44.00	4.10	0.91	287.56	4.900	0.91	0.00	0.00
8	148.00	RRH4X45-AWS	3	64.00	2.54	0.82	147.45	3.303	0.83	0.00	0.00
9	148.00	RRH2X60-PCS	3	55.00	2.20	0.89	139.39	2.835	0.89	0.00	0.00
10	148.00	Low Profile Platform	1	1200.00	25.00	1.00	2245.72	45.914	1.00	0.00	0.00
11	137.00	CCI HPA-65R-BUU-H8	3	68.00	12.98	0.79	355.99	14.580	0.79	0.00	0.00
12	137.00	CCI DTMABP7819VG12A	6	19.20	1.14	0.67	44.49	1.903	0.67	0.00	0.00
13	137.00	Ericsson RRUS-11	6	51.00	2.52	0.71	122.62	3.148	0.73	0.00	0.00
14	137.00	Ericsson RRUS-12	6	58.00	3.15	0.70	152.34	3.857	0.70	0.00	0.00
15	137.00	CCI OPA-65R-LCUU-H6	3	80.00	9.66	0.79	309.31	11.013	0.81	0.00	0.00
16	137.00	KMW AM-X-CD-16-65-OOT	3	48.50	8.02	0.75	209.31	10.789	0.77	0.00	0.00
17	137.00	Ericsson RRUS 32 B2	3	60.00	2.74	0.81	147.02	3.462	0.83	0.00	0.00
18	137.00	Ericsson RRU A2	6	21.20	1.86	0.62	56.98	2.825	0.62	0.00	0.00
19	137.00	Ericsson RRUS-32	3	77.00	3.87	0.87	189.35	4.098	0.89	0.00	0.00
20	137.00	Quintel QS66512-2	3	111.00	8.13	0.92	327.77	9.412	0.93	0.00	0.00
21	137.00	DC6-48-60-18-8F	3	31.80	1.47	0.80	93.07	2.163	0.80	0.00	0.00
22	137.00	Platform w/ Hand Rails	1	2000.00	40.00	1.00	4075.36	60.754	1.00	0.00	0.00
23	127.00	Decibel/ DB844H90E-XY	9	14.00	3.05	0.75	122.39	3.907	0.75	0.00	0.00
24	127.00	DragonWave/ A-ANT-23G-2.0-C	2	12.30	8.43	1.00	56.17	10.108	1.00	0.00	0.00
25	127.00	KMW/ ETCR-654L12H6	3	99.00	15.71	0.71	415.73	17.360	0.72	0.00	0.00
26	127.00	ALU/ 1900MHz - RRH	3	60.00	2.77	0.67	142.06	4.018	0.68	0.00	0.00
27	127.00	ALU/ 800 MHz - RRH	6	53.00	2.49	0.50	125.74	3.615	0.51	0.00	0.00
28	127.00	ALU/ TD-RRH8x20-25 - RRU	3	70.00	4.05	0.67	178.26	4.849	0.68	0.00	0.00
29	127.00	Platform w/ Handrails	1	2000.00	42.00	1.00	3716.41	76.603	1.00	0.00	0.00
30	122.00	CS72188.01 Omni	1	25.00	3.00	1.00	99.50	6.533	1.00	0.00	5.00

Totals: 101 10,834.04 28,124.64

Linear Appurtenances

Bottom Elev. (ft)	Top Elev. (ft)	Description	Exposed Width	Exposed
0.00	158.00	(6) 1-5/8"	0.00	Inside
0.00	148.00	(12) 1-5/8"	0.00	Inside
0.00	148.00	(1) 1-5/8" Hybrid	0.00	Inside
0.00	137.00	(12) 1-5/8" Coax	0.00	Inside
0.00	137.00	(2) 1/2" Fiber	0.00	Inside
0.00	137.00	(4) 3/4" DC	0.00	Inside
0.00	127.00	(12) 1-1/4"	0.00	Inside
0.00	127.00	(4) 1-1/4" Fiber	0.00	Inside
0.00	127.00	(2) 1/2"	0.00	Inside
0.00	122.00	(1) 1/2" Coax	0.00	Inside

Discrete Appurtenances

No.	Elev (ft)	Description	Qty	No Ice			Ice			Hor. Ecc. (ft)	Vert Ecc (ft)
				Weight (lb)	CaAa (sf)	CaAa Factor	Weight (lb)	CaAa (sf)	CaAa Factor		

Shaft Section Properties

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Topography: 1 **Struct Class:** II

10/17/2017



Page: 8

Increment Length: 5 (ft)

Elev (ft)	Description	Thick (in)	Dia (in)	Area (in^2)	Ix (in^4)	W/t Ratio	D/t Ratio	Fpy (ksi)	S (in^3)	Weight (lb)
0.00		0.5000	59.980	94.391	42191.7	19.74	119.96	78.2	1385.	0.0
5.00		0.5000	58.780	92.487	39689.4	19.32	117.56	78.7	1329.	1589.8
10.00		0.5000	57.580	90.583	37288.1	18.90	115.16	79.2	1275.	1557.4
15.00		0.5000	56.380	88.679	34985.6	18.47	112.76	79.7	1222.	1525.0
20.00		0.5000	55.180	86.775	32779.9	18.05	110.36	80.2	1170.	1492.6
25.00		0.5000	53.980	84.870	30668.9	17.63	107.96	80.7	1119.	1460.2
30.00		0.5000	52.780	82.966	28650.5	17.20	105.56	81.2	1069.	1427.8
35.00		0.5000	51.581	81.062	26722.7	16.78	103.16	81.7	1020.	1395.4
38.50	Bot - Section 2	0.5000	50.741	79.729	25426.0	16.48	101.48	82.0	987.0	957.5
40.00		0.5000	50.381	79.158	24883.4	16.36	100.76	82.2	972.8	741.0
45.00	Top - Section 1	0.4063	49.993	63.945	19865.3	20.29	123.05	0.0	0.0	2431.7
50.00		0.4063	48.793	62.398	18457.8	19.76	120.09	78.2	745.1	1074.8
55.00		0.4063	47.593	60.850	17118.4	19.24	117.14	78.8	708.4	1048.5
60.00		0.4063	46.394	59.303	15845.4	18.72	114.19	79.4	672.7	1022.1
65.00		0.4063	45.194	57.755	14637.1	18.20	111.23	80.0	637.9	995.8
70.00		0.4063	43.994	56.208	13491.9	17.68	108.28	80.6	604.0	969.5
75.00		0.4063	42.794	54.661	12408.0	17.16	105.33	81.2	571.1	943.2
78.00	Bot - Section 3	0.4063	42.074	53.732	11786.5	16.85	103.55	81.6	551.8	553.3
80.00		0.4063	41.594	53.113	11383.8	16.64	102.37	81.8	539.1	648.1
83.50	Top - Section 2	0.3125	41.379	40.731	8678.7	21.94	132.41	0.0	0.0	1116.2
85.00		0.3125	41.019	40.374	8452.4	21.73	131.26	75.8	405.9	207.0
90.00		0.3125	39.819	39.184	7726.8	21.06	127.42	76.6	382.2	676.8
95.00		0.3125	38.619	37.994	7043.9	20.38	123.58	77.4	359.2	656.5
100.00		0.3125	37.419	36.804	6402.5	19.70	119.74	78.2	337.0	636.3
105.00		0.3125	36.219	35.614	5801.2	19.03	115.90	79.0	315.5	616.1
110.00		0.3125	35.019	34.424	5238.9	18.35	112.06	79.8	294.7	595.8
113.50	Bot - Section 4	0.3125	34.179	33.590	4867.6	17.87	109.37	80.4	280.5	405.0
115.00		0.3125	33.819	33.233	4714.1	17.67	108.22	80.6	274.5	309.3
118.00	Top - Section 3	0.2500	33.599	26.462	3718.3	22.29	134.40	0.0	0.0	608.7
120.00		0.2500	33.119	26.081	3560.1	21.95	132.48	75.6	211.7	178.8
122.00		0.2500	32.639	25.700	3406.4	21.61	130.56	76.0	205.6	176.2
125.00		0.2500	31.919	25.129	3184.3	21.10	127.68	76.6	196.5	259.4
127.00		0.2500	31.440	24.748	3041.7	20.76	125.76	77.0	190.6	169.7
130.00		0.2500	30.720	24.177	2835.9	20.26	122.88	77.6	181.8	249.7
135.00		0.2500	29.520	23.225	2513.8	19.41	118.08	78.6	167.7	403.2
137.00		0.2500	29.040	22.844	2392.2	19.07	116.16	79.0	162.2	156.8
140.00		0.2500	28.320	22.273	2217.2	18.56	113.28	79.6	154.2	230.3
145.00		0.2500	27.120	21.320	1944.8	17.72	108.48	80.6	141.2	370.8
148.00		0.2500	26.400	20.749	1792.6	17.21	105.60	81.2	133.7	214.7
150.00		0.2500	25.920	20.368	1695.7	16.87	103.68	81.6	128.9	139.9
155.00		0.2500	24.720	19.416	1468.9	16.02	98.88	82.5	117.0	338.4
158.00		0.2500	24.000	18.845	1343.0	15.52	96.00	82.5	110.2	195.3
										30744.2

Wind Loading - Shaft

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1 **Topography:** 1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 9

Load Case: 1.2D + 1.6W 97 mph Wind

Dead Load Factor 1.20
Wind Load Factor 1.60



Iterations

23

Elev (ft)	Description	Kzt	Kz	qz (psf)	qzGh (psf)	C (mph-ft)	Cf	Ice Thick (in)	Tributary (ft)	Aa (sf)	CfAa (sf)	Wind Force X (lb)	Dead Load Ice (lb)	Tot Dead Load (lb)
0.00		1.00	0.85	19.450	21.40	453.89	0.650	0.000	0.00	0.000	0.00	0.0	0.0	0.0
5.00		1.00	0.85	19.450	21.40	444.81	0.650	0.000	5.00	25.123	16.33	559.0	0.0	1907.7
10.00		1.00	0.85	19.450	21.40	435.73	0.650	0.000	5.00	24.616	16.00	547.7	0.0	1868.8
15.00		1.00	0.85	19.450	21.40	426.65	0.650	0.000	5.00	24.108	15.67	536.4	0.0	1830.0
20.00		1.00	0.90	20.638	22.70	430.13	0.650	0.000	5.00	23.600	15.34	557.2	0.0	1791.1
25.00		1.00	0.95	21.630	23.79	430.78	0.650	0.000	5.00	23.093	15.01	571.4	0.0	1752.2
30.00		1.00	0.98	22.477	24.72	429.36	0.650	0.000	5.00	22.585	14.68	580.7	0.0	1713.3
35.00		1.00	1.01	23.218	25.54	426.47	0.650	0.000	5.00	22.077	14.35	586.4	0.0	1674.5
38.50 Bot - Section 2		1.00	1.04	23.689	26.06	423.75	0.650	0.000	3.50	15.152	9.85	410.6	0.0	1149.0
40.00		1.00	1.04	23.880	26.27	422.44	0.650	0.000	1.50	6.521	4.24	178.1	0.0	889.2
45.00 Top - Section 1		1.00	1.07	24.479	26.93	417.52	0.650	0.000	5.00	21.406	13.91	599.5	0.0	2918.0
50.00		1.00	1.09	25.029	27.53	418.86	0.650	0.000	5.00	20.898	13.58	598.4	0.0	1289.7
55.00		1.00	1.12	25.536	28.09	412.67	0.650	0.000	5.00	20.390	13.25	595.7	0.0	1258.2
60.00		1.00	1.14	26.008	28.61	405.97	0.650	0.000	5.00	19.883	12.92	591.6	0.0	1226.6
65.00		1.00	1.16	26.450	29.09	398.82	0.650	0.000	5.00	19.375	12.59	586.3	0.0	1195.0
70.00		1.00	1.17	26.866	29.55	391.27	0.650	0.000	5.00	18.867	12.26	579.9	0.0	1163.4
75.00		1.00	1.19	27.259	29.98	383.37	0.650	0.000	5.00	18.360	11.93	572.5	0.0	1131.8
78.00 Bot - Section 3		1.00	1.20	27.485	30.23	378.48	0.650	0.000	3.00	10.772	7.00	338.7	0.0	663.9
80.00		1.00	1.21	27.632	30.39	375.16	0.650	0.000	2.00	7.186	4.67	227.1	0.0	777.7
83.50 Top - Section 2		1.00	1.22	27.882	30.67	369.25	0.650	0.000	3.50	12.379	8.05	394.9	0.0	1339.4
85.00		1.00	1.22	27.987	30.79	372.34	0.650	0.000	1.50	5.229	3.40	167.4	0.0	248.4
90.00		1.00	1.24	28.325	31.16	363.63	0.650	0.000	5.00	17.101	11.12	554.1	0.0	812.2
95.00		1.00	1.25	28.650	31.51	354.69	0.650	0.000	5.00	16.593	10.79	543.9	0.0	787.9
100.00		1.00	1.27	28.961	31.86	345.53	0.650	0.000	5.00	16.086	10.46	532.9	0.0	763.6
105.00		1.00	1.28	29.260	32.19	336.17	0.650	0.000	5.00	15.578	10.13	521.4	0.0	739.3
110.00		1.00	1.29	29.548	32.50	326.63	0.650	0.000	5.00	15.070	9.80	509.4	0.0	715.0
113.50 Bot - Section 4		1.00	1.30	29.743	32.72	319.85	0.650	0.000	3.50	10.247	6.66	348.7	0.0	486.0
115.00		1.00	1.30	29.826	32.81	316.92	0.650	0.000	1.50	4.379	2.85	149.4	0.0	371.1
118.00 Top - Section 3		1.00	1.31	29.988	32.99	311.01	0.650	0.000	3.00	8.621	5.60	295.7	0.0	730.4
120.00		1.00	1.32	30.094	33.10	311.75	0.650	0.000	2.00	5.646	3.67	194.4	0.0	214.5
122.00 Appurtenance(s)		1.00	1.32	30.199	33.22	307.77	0.650	0.000	2.00	5.564	3.62	192.2	0.0	211.4
125.00		1.00	1.33	30.354	33.39	301.75	0.650	0.000	3.00	8.194	5.33	284.5	0.0	311.3
127.00 Appurtenance(s)		1.00	1.33	30.455	33.50	297.71	0.650	0.000	2.00	5.361	3.48	186.8	0.0	203.7
130.00		1.00	1.34	30.605	33.67	291.61	0.650	0.000	3.00	7.890	5.13	276.2	0.0	299.7
135.00		1.00	1.35	30.850	33.93	281.33	0.650	0.000	5.00	12.743	8.28	449.7	0.0	483.9
137.00 Appurtenance(s)		1.00	1.35	30.945	34.04	277.19	0.650	0.000	2.00	4.955	3.22	175.4	0.0	188.1
140.00		1.00	1.36	31.087	34.20	270.93	0.650	0.000	3.00	7.281	4.73	258.9	0.0	276.3
145.00		1.00	1.37	31.317	34.45	260.41	0.650	0.000	5.00	11.728	7.62	420.2	0.0	445.0
148.00 Appurtenance(s)		1.00	1.37	31.452	34.60	254.05	0.650	0.000	3.00	6.793	4.42	244.4	0.0	257.7
150.00		1.00	1.38	31.541	34.70	249.78	0.650	0.000	2.00	4.427	2.88	159.7	0.0	167.9
155.00		1.00	1.39	31.760	34.94	239.04	0.650	0.000	5.00	10.713	6.96	389.2	0.0	406.1
158.00 Appurtenance(s)		1.00	1.39	31.888	35.08	232.55	0.650	0.000	3.00	6.184	4.02	225.6	0.0	234.3

Totals: **158.00** **16,692.6** **36,893.1**

Discrete Appurtenance Forces

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 10

Load Case: 1.2D + 1.6W 97 mph Wind

Dead Load Factor 1.20
Wind Load Factor 1.60



Iterations

23

No.	Elev (ft)	Description	Qty	qz (psf)	qzGh (psf)	CaAa x Ka	Ka	Total CaAa (sf)	Dead Load (lb)	Horiz Ecc (ft)	Vert Ecc (ft)	Wind FX (lb)	Mom Y (lb-ft)	Mom Z (lb-ft)
1	158.00	APXV18-206517S-C	3	31.888	35.077	0.74	1.00	11.48	95.04	0.000	0.000	644.15	0.00	0.00
2	158.00	Low Profile Platform	1	31.888	35.077	1.00	1.00	25.00	1440.00	0.000	0.000	1403.09	0.00	0.00
3	148.00	LNX-6514DS-A1M	2	31.452	34.598	0.66	0.80	10.85	93.12	0.000	0.000	600.60	0.00	0.00
4	148.00	HBXX-6517DS-A2M	6	31.452	34.598	0.62	0.80	31.60	293.76	0.000	0.000	1749.30	0.00	0.00
5	148.00	DB844G65VTZASX	6	31.452	34.598	0.74	0.80	19.33	115.20	0.000	0.000	1069.99	0.00	0.00
6	148.00	LNX-4514DS-A1M	1	31.452	34.598	0.57	0.80	3.86	35.45	0.000	0.000	213.49	0.00	0.00
7	148.00	DB-T1-6Z-8AB-0Z	1	31.452	34.598	0.73	0.80	2.98	52.80	0.000	0.000	165.23	0.00	0.00
8	148.00	RRH4X45-AWS	3	31.452	34.598	0.66	0.80	5.00	230.40	0.000	0.000	276.71	0.00	0.00
9	148.00	RRH2X60-PCS	3	31.452	34.598	0.71	0.80	4.70	198.00	0.000	0.000	260.13	0.00	0.00
10	148.00	Low Profile Platform	1	31.452	34.598	1.00	1.00	25.00	1440.00	0.000	0.000	1383.91	0.00	0.00
11	137.00	Ericsson RRUS 32 B2	3	30.945	34.040	0.65	0.80	5.33	216.00	0.000	0.000	290.10	0.00	0.00
12	137.00	KMW	3	30.945	34.040	0.60	0.80	14.44	174.60	0.000	0.000	786.24	0.00	0.00
13	137.00	CCI OPA-65R-LCUU-H6	3	30.945	34.040	0.63	0.80	18.32	288.00	0.000	0.000	997.52	0.00	0.00
14	137.00	Ericsson RRUS-12	6	30.945	34.040	0.56	0.80	10.58	417.60	0.000	0.000	576.44	0.00	0.00
15	137.00	Ericsson RRUS-11	6	30.945	34.040	0.57	0.80	8.59	367.20	0.000	0.000	467.74	0.00	0.00
16	137.00	CCI DTMABP7819VG12A	6	30.945	34.040	0.54	0.80	3.67	138.24	0.000	0.000	199.68	0.00	0.00
17	137.00	Platform w/ Hand Rails	1	30.945	34.040	1.00	1.00	40.00	2400.00	0.000	0.000	2178.54	0.00	0.00
18	137.00	DC6-48-60-18-8F	3	30.945	34.040	0.64	0.80	2.82	114.48	0.000	0.000	153.72	0.00	0.00
19	137.00	Quintel QS66512-2	3	30.945	34.040	0.73	0.80	17.91	399.60	0.000	0.000	975.55	0.00	0.00
20	137.00	Ericsson RRUS-32	3	30.945	34.040	0.70	0.80	8.08	277.20	0.000	0.000	440.10	0.00	0.00
21	137.00	Ericsson RRU A2	6	30.945	34.040	0.50	0.80	5.54	152.64	0.000	0.000	301.48	0.00	0.00
22	137.00	CCI HPA-65R-BUU-H8	3	30.945	34.040	0.63	0.80	24.61	244.80	0.000	0.000	1340.35	0.00	0.00
23	127.00	KMW/ ETCR-654L12H6	3	30.455	33.501	0.57	0.80	26.77	356.40	0.000	0.000	1434.90	0.00	0.00
24	127.00	Decibel/ DB844H90E-XY	9	30.455	33.501	0.60	0.80	16.47	151.20	0.000	0.000	882.81	0.00	0.00
25	127.00	DragonWave/	2	30.455	33.501	1.00	1.00	16.86	29.52	0.000	0.000	903.72	0.00	0.00
26	127.00	Platform w/ Handrails	1	30.455	33.501	1.00	1.00	42.00	2400.00	0.000	0.000	2251.26	0.00	0.00
27	127.00	ALU/ 1900MHz - RRH	3	30.455	33.501	0.54	0.80	4.45	216.00	0.000	0.000	238.75	0.00	0.00
28	127.00	ALU/ 800 MHz - RRH	6	30.455	33.501	0.40	0.80	5.98	381.60	0.000	0.000	320.32	0.00	0.00
29	127.00	ALU/ TD-RRH8x20-25 -	3	30.455	33.501	0.54	0.80	6.51	252.00	0.000	0.000	349.07	0.00	0.00
30	122.00	CS72188.01 Omni	1	30.455	33.501	1.00	1.00	3.00	30.00	0.000	5.000	160.80	0.00	804.02

Totals: 13,000.85

23,015.70

Total Applied Force Summary

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 11

Load Case: 1.2D + 1.6W 97 mph Wind

Dead Load Factor 1.20
Wind Load Factor 1.60



Iterations 23

Elev (ft)	Description	Lateral FX (-) (lb)	Axial FY (-) (lb)	Torsion MY (lb-ft)	Moment MZ (lb-ft)
0.00		0.00	0.00	0.00	0.00
5.00		559.02	2186.33	0.00	0.00
10.00		547.73	2147.46	0.00	0.00
15.00		536.43	2108.58	0.00	0.00
20.00		557.19	2069.70	0.00	0.00
25.00		571.43	2030.82	0.00	0.00
30.00		580.73	1991.95	0.00	0.00
35.00		586.40	1953.07	0.00	0.00
38.50		410.62	1344.02	0.00	0.00
40.00		178.14	972.74	0.00	0.00
45.00		599.46	3196.65	0.00	0.00
50.00		598.37	1568.36	0.00	0.00
55.00		595.66	1536.77	0.00	0.00
60.00		591.57	1505.18	0.00	0.00
65.00		586.26	1473.59	0.00	0.00
70.00		579.88	1441.99	0.00	0.00
75.00		572.53	1410.40	0.00	0.00
78.00		338.70	831.08	0.00	0.00
80.00		227.14	889.12	0.00	0.00
83.50		394.86	1534.44	0.00	0.00
85.00		167.43	331.97	0.00	0.00
90.00		554.15	1090.77	0.00	0.00
95.00		543.85	1066.47	0.00	0.00
100.00		532.94	1042.18	0.00	0.00
105.00		521.44	1017.88	0.00	0.00
110.00		509.42	993.58	0.00	0.00
113.50		348.67	681.05	0.00	0.00
115.00		149.41	454.69	0.00	0.00
118.00		295.74	897.56	0.00	0.00
120.00		194.37	326.00	0.00	0.00
122.00	(1) attachments	353.04	352.89	0.00	804.02
125.00		284.55	477.92	0.00	0.00
127.00	(27) attachments	6567.63	4101.45	0.00	0.00
130.00		276.24	422.86	0.00	0.00
135.00		449.74	689.21	0.00	0.00
137.00	(46) attachments	8882.87	5460.60	0.00	0.00
140.00		258.92	347.69	0.00	0.00
145.00		420.18	563.93	0.00	0.00
148.00	(23) attachments	5963.79	2787.76	0.00	0.00
150.00		159.75	182.87	0.00	0.00
155.00		389.23	443.57	0.00	0.00
158.00	(4) attachments	2272.83	1791.85	0.00	0.00
	Totals:	39,708.31	57,716.97	0.00	804.02

Calculated Forces

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 12

Load Case: 1.2D + 1.6W 97 mph Wind

Dead Load Factor 1.20
Wind Load Factor 1.60



Iterations

23

Seg Elev (ft)	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Total Deflect (in)	Rotation Sway (deg)	Rotation Twist (deg)	Stress Ratio
0.00	-57.66	-39.79	0.00	-4622.5	0.00	4622.59	6641.65	3320.83	16223.6	8123.90	0.00	0.000	0.000	0.578
5.00	-55.37	-39.37	0.00	-4423.6	0.00	4423.66	6549.09	3274.55	15672.1	7847.74	0.08	-0.152	0.000	0.572
10.00	-53.12	-38.96	0.00	-4226.7	0.00	4226.79	6454.83	3227.41	15125.8	7574.18	0.33	-0.308	0.000	0.566
15.00	-50.91	-38.55	0.00	-4031.9	0.00	4031.99	6358.86	3179.43	14585.0	7303.35	0.73	-0.465	0.000	0.560
20.00	-48.74	-38.11	0.00	-3839.2	0.00	3839.23	6261.18	3130.59	14049.8	7035.38	1.31	-0.625	0.000	0.554
25.00	-46.61	-37.65	0.00	-3648.6	0.00	3648.67	6161.80	3080.90	13520.6	6770.39	2.05	-0.788	0.000	0.547
30.00	-44.52	-37.17	0.00	-3460.4	0.00	3460.42	6060.71	3030.36	12997.7	6508.52	2.96	-0.952	0.000	0.539
35.00	-42.48	-36.65	0.00	-3274.5	0.00	3274.59	5957.92	2978.96	12481.2	6249.90	4.05	-1.120	0.000	0.531
38.50	-41.09	-36.28	0.00	-3146.3	0.00	3146.30	5884.95	2942.47	12123.6	6070.85	4.91	-1.239	0.000	0.525
40.00	-40.05	-36.16	0.00	-3091.8	0.00	3091.89	5853.42	2926.71	11971.4	5994.64	5.31	-1.292	0.000	0.523
45.00	-36.76	-35.59	0.00	-2911.1	0.00	2911.12	4462.52	2231.26	9089.55	4551.53	6.76	-1.463	0.000	0.648
50.00	-35.10	-35.07	0.00	-2733.1	0.00	2733.17	4388.93	2194.47	8721.58	4367.27	8.38	-1.637	0.000	0.634
55.00	-33.46	-34.54	0.00	-2557.8	0.00	2557.85	4313.64	2156.82	8357.61	4185.02	10.21	-1.841	0.000	0.619
60.00	-31.85	-34.02	0.00	-2385.1	0.00	2385.14	4236.64	2118.32	7997.90	4004.90	12.25	-2.046	0.000	0.603
65.00	-30.28	-33.48	0.00	-2215.0	0.00	2215.07	4157.93	2078.96	7642.72	3827.04	14.50	-2.253	0.000	0.586
70.00	-28.74	-32.95	0.00	-2047.6	0.00	2047.65	4077.51	2038.76	7292.30	3651.57	16.97	-2.460	0.000	0.568
75.00	-27.27	-32.39	0.00	-1882.9	0.00	1882.91	3995.39	1997.70	6946.91	3478.62	19.66	-2.667	0.000	0.548
78.00	-26.39	-32.06	0.00	-1785.7	0.00	1785.73	3945.30	1972.65	6742.20	3376.11	21.37	-2.793	0.000	0.536
80.00	-25.45	-31.84	0.00	-1721.6	0.00	1721.60	3911.57	1955.78	6606.80	3308.31	22.56	-2.878	0.000	0.527
83.50	-23.88	-31.41	0.00	-1610.1	0.00	1610.15	2771.30	1385.65	4677.52	2342.24	24.73	-3.023	0.000	0.697
85.00	-23.47	-31.29	0.00	-1563.0	0.00	1563.03	2755.69	1377.84	4610.09	2308.47	25.69	-3.087	0.000	0.686
90.00	-22.28	-30.78	0.00	-1406.5	0.00	1406.56	2702.54	1351.27	4386.89	2196.71	29.05	-3.337	0.000	0.649
95.00	-21.12	-30.26	0.00	-1252.6	0.00	1252.68	2647.69	1323.84	4166.29	2086.24	32.68	-3.581	0.000	0.609
100.00	-20.00	-29.74	0.00	-1101.3	0.00	1101.39	2591.13	1295.56	3948.53	1977.20	36.56	-3.819	0.000	0.565
105.00	-18.90	-29.22	0.00	-952.68	0.00	952.68	2532.86	1266.43	3733.89	1869.72	40.68	-4.047	0.000	0.518
110.00	-17.86	-28.70	0.00	-806.56	0.00	806.56	2472.89	1236.44	3522.60	1763.92	45.03	-4.263	0.000	0.465
113.50	-17.16	-28.33	0.00	-706.11	0.00	706.11	2429.89	1214.95	3376.84	1690.93	48.21	-4.407	0.000	0.425
115.00	-16.67	-28.17	0.00	-663.62	0.00	663.62	2411.21	1205.60	3314.94	1659.93	49.60	-4.467	0.000	0.407
118.00	-15.76	-27.83	0.00	-579.10	0.00	579.10	1790.62	895.31	2454.63	1229.14	52.45	-4.579	0.000	0.481
120.00	-15.41	-27.63	0.00	-523.44	0.00	523.44	1774.20	887.10	2396.85	1200.21	54.38	-4.650	0.000	0.446
122.00	-15.05	-27.28	0.00	-467.37	0.00	467.37	1757.50	878.75	2339.36	1171.42	56.34	-4.729	0.000	0.409
125.00	-14.55	-26.97	0.00	-385.54	0.00	385.54	1731.94	865.97	2253.71	1128.53	59.35	-4.836	0.000	0.351
127.00	-11.00	-20.10	0.00	-331.59	0.00	331.59	1714.56	857.28	2197.01	1100.14	61.39	-4.900	0.000	0.308
130.00	-10.57	-19.80	0.00	-271.31	0.00	271.31	1687.98	843.99	2112.62	1057.88	64.49	-4.985	0.000	0.263
135.00	-9.90	-19.31	0.00	-172.29	0.00	172.29	1642.31	821.15	1973.86	988.40	69.77	-5.096	0.000	0.181
137.00	-5.24	-9.98	0.00	-133.68	0.00	133.68	1623.56	811.78	1919.06	960.96	71.91	-5.131	0.000	0.142
140.00	-4.91	-9.69	0.00	-103.75	0.00	103.75	1594.93	797.47	1837.67	920.20	75.15	-5.173	0.000	0.116
145.00	-4.38	-9.22	0.00	-55.29	0.00	55.29	1545.85	772.93	1704.31	853.42	80.59	-5.224	0.000	0.068
148.00	-2.15	-3.03	0.00	-27.62	0.00	27.62	1515.59	757.79	1625.76	814.09	83.87	-5.242	0.000	0.035
150.00	-1.98	-2.86	0.00	-21.56	0.00	21.56	1495.07	747.53	1574.03	788.19	86.07	-5.250	0.000	0.029
155.00	-1.58	-2.43	0.00	-7.28	0.00	7.28	1442.53	721.26	1447.04	724.60	91.57	-5.262	0.000	0.011
158.00	0.00	-2.27	0.00	0.00	0.00	0.00	1400.09	700.04	1362.73	682.38	94.87	-5.264	0.000	0.000

Wind Loading - Shaft

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1 **Topography:** 1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 13

Load Case: 0.9D + 1.6W 97 mph Wind

Dead Load Factor 0.90
Wind Load Factor 1.60



Iterations

23

Elev (ft)	Description	Kzt	Kz	qz (psf)	qzGh (psf)	C (mph-ft)	Cf	Ice Thick (in)	Tributary (ft)	Aa (sf)	CfAa (sf)	Wind Force X (lb)	Dead Load Ice (lb)	Tot Dead Load (lb)
0.00		1.00	0.85	19.450	21.40	453.89	0.650	0.000	0.00	0.000	0.00	0.0	0.0	0.0
5.00		1.00	0.85	19.450	21.40	444.81	0.650	0.000	5.00	25.123	16.33	559.0	0.0	1430.8
10.00		1.00	0.85	19.450	21.40	435.73	0.650	0.000	5.00	24.616	16.00	547.7	0.0	1401.6
15.00		1.00	0.85	19.450	21.40	426.65	0.650	0.000	5.00	24.108	15.67	536.4	0.0	1372.5
20.00		1.00	0.90	20.638	22.70	430.13	0.650	0.000	5.00	23.600	15.34	557.2	0.0	1343.3
25.00		1.00	0.95	21.630	23.79	430.78	0.650	0.000	5.00	23.093	15.01	571.4	0.0	1314.2
30.00		1.00	0.98	22.477	24.72	429.36	0.650	0.000	5.00	22.585	14.68	580.7	0.0	1285.0
35.00		1.00	1.01	23.218	25.54	426.47	0.650	0.000	5.00	22.077	14.35	586.4	0.0	1255.8
38.50 Bot - Section 2		1.00	1.04	23.689	26.06	423.75	0.650	0.000	3.50	15.152	9.85	410.6	0.0	861.7
40.00		1.00	1.04	23.880	26.27	422.44	0.650	0.000	1.50	6.521	4.24	178.1	0.0	666.9
45.00 Top - Section 1		1.00	1.07	24.479	26.93	417.52	0.650	0.000	5.00	21.406	13.91	599.5	0.0	2188.5
50.00		1.00	1.09	25.029	27.53	418.86	0.650	0.000	5.00	20.898	13.58	598.4	0.0	967.3
55.00		1.00	1.12	25.536	28.09	412.67	0.650	0.000	5.00	20.390	13.25	595.7	0.0	943.6
60.00		1.00	1.14	26.008	28.61	405.97	0.650	0.000	5.00	19.883	12.92	591.6	0.0	919.9
65.00		1.00	1.16	26.450	29.09	398.82	0.650	0.000	5.00	19.375	12.59	586.3	0.0	896.2
70.00		1.00	1.17	26.866	29.55	391.27	0.650	0.000	5.00	18.867	12.26	579.9	0.0	872.5
75.00		1.00	1.19	27.259	29.98	383.37	0.650	0.000	5.00	18.360	11.93	572.5	0.0	848.8
78.00 Bot - Section 3		1.00	1.20	27.485	30.23	378.48	0.650	0.000	3.00	10.772	7.00	338.7	0.0	497.9
80.00		1.00	1.21	27.632	30.39	375.16	0.650	0.000	2.00	7.186	4.67	227.1	0.0	583.3
83.50 Top - Section 2		1.00	1.22	27.882	30.67	369.25	0.650	0.000	3.50	12.379	8.05	394.9	0.0	1004.6
85.00		1.00	1.22	27.987	30.79	372.34	0.650	0.000	1.50	5.229	3.40	167.4	0.0	186.3
90.00		1.00	1.24	28.325	31.16	363.63	0.650	0.000	5.00	17.101	11.12	554.1	0.0	609.1
95.00		1.00	1.25	28.650	31.51	354.69	0.650	0.000	5.00	16.593	10.79	543.9	0.0	590.9
100.00		1.00	1.27	28.961	31.86	345.53	0.650	0.000	5.00	16.086	10.46	532.9	0.0	572.7
105.00		1.00	1.28	29.260	32.19	336.17	0.650	0.000	5.00	15.578	10.13	521.4	0.0	554.4
110.00		1.00	1.29	29.548	32.50	326.63	0.650	0.000	5.00	15.070	9.80	509.4	0.0	536.2
113.50 Bot - Section 4		1.00	1.30	29.743	32.72	319.85	0.650	0.000	3.50	10.247	6.66	348.7	0.0	364.5
115.00		1.00	1.30	29.826	32.81	316.92	0.650	0.000	1.50	4.379	2.85	149.4	0.0	278.3
118.00 Top - Section 3		1.00	1.31	29.988	32.99	311.01	0.650	0.000	3.00	8.621	5.60	295.7	0.0	547.8
120.00		1.00	1.32	30.094	33.10	311.75	0.650	0.000	2.00	5.646	3.67	194.4	0.0	160.9
122.00 Appurtenance(s)		1.00	1.32	30.199	33.22	307.77	0.650	0.000	2.00	5.564	3.62	192.2	0.0	158.6
125.00		1.00	1.33	30.354	33.39	301.75	0.650	0.000	3.00	8.194	5.33	284.5	0.0	233.5
127.00 Appurtenance(s)		1.00	1.33	30.455	33.50	297.71	0.650	0.000	2.00	5.361	3.48	186.8	0.0	152.7
130.00		1.00	1.34	30.605	33.67	291.61	0.650	0.000	3.00	7.890	5.13	276.2	0.0	224.7
135.00		1.00	1.35	30.850	33.93	281.33	0.650	0.000	5.00	12.743	8.28	449.7	0.0	362.9
137.00 Appurtenance(s)		1.00	1.35	30.945	34.04	277.19	0.650	0.000	2.00	4.955	3.22	175.4	0.0	141.1
140.00		1.00	1.36	31.087	34.20	270.93	0.650	0.000	3.00	7.281	4.73	258.9	0.0	207.3
145.00		1.00	1.37	31.317	34.45	260.41	0.650	0.000	5.00	11.728	7.62	420.2	0.0	333.8
148.00 Appurtenance(s)		1.00	1.37	31.452	34.60	254.05	0.650	0.000	3.00	6.793	4.42	244.4	0.0	193.3
150.00		1.00	1.38	31.541	34.70	249.78	0.650	0.000	2.00	4.427	2.88	159.7	0.0	125.9
155.00		1.00	1.39	31.760	34.94	239.04	0.650	0.000	5.00	10.713	6.96	389.2	0.0	304.6
158.00 Appurtenance(s)		1.00	1.39	31.888	35.08	232.55	0.650	0.000	3.00	6.184	4.02	225.6	0.0	175.8

Totals: 158.00 16,692.6 27,669.8

Discrete Appurtenance Forces

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II

10/17/2017



Page: 14

Load Case: 0.9D + 1.6W 97 mph Wind

Dead Load Factor 0.90
Wind Load Factor 1.60



Iterations

23

No.	Elev (ft)	Description	Qty	qz (psf)	qzGh (psf)	CaAa x Ka	Ka	Total CaAa (sf)	Dead Load (lb)	Horiz Ecc (ft)	Vert Ecc (ft)	Wind FX (lb)	Mom Y (lb-ft)	Mom Z (lb-ft)
1	158.00	APXV18-206517S-C	3	31.888	35.077	0.74	1.00	11.48	71.28	0.000	0.000	644.15	0.00	0.00
2	158.00	Low Profile Platform	1	31.888	35.077	1.00	1.00	25.00	1080.00	0.000	0.000	1403.09	0.00	0.00
3	148.00	LNX-6514DS-A1M	2	31.452	34.598	0.66	0.80	10.85	69.84	0.000	0.000	600.60	0.00	0.00
4	148.00	HBXX-6517DS-A2M	6	31.452	34.598	0.62	0.80	31.60	220.32	0.000	0.000	1749.30	0.00	0.00
5	148.00	DB844G65VTZASX	6	31.452	34.598	0.74	0.80	19.33	86.40	0.000	0.000	1069.99	0.00	0.00
6	148.00	LNX-4514DS-A1M	1	31.452	34.598	0.57	0.80	3.86	26.59	0.000	0.000	213.49	0.00	0.00
7	148.00	DB-T1-6Z-8AB-0Z	1	31.452	34.598	0.73	0.80	2.98	39.60	0.000	0.000	165.23	0.00	0.00
8	148.00	RRH4X45-AWS	3	31.452	34.598	0.66	0.80	5.00	172.80	0.000	0.000	276.71	0.00	0.00
9	148.00	RRH2X60-PCS	3	31.452	34.598	0.71	0.80	4.70	148.50	0.000	0.000	260.13	0.00	0.00
10	148.00	Low Profile Platform	1	31.452	34.598	1.00	1.00	25.00	1080.00	0.000	0.000	1383.91	0.00	0.00
11	137.00	Ericsson RRUS 32 B2	3	30.945	34.040	0.65	0.80	5.33	162.00	0.000	0.000	290.10	0.00	0.00
12	137.00	KMW	3	30.945	34.040	0.60	0.80	14.44	130.95	0.000	0.000	786.24	0.00	0.00
13	137.00	CCI OPA-65R-LCUU-H6	3	30.945	34.040	0.63	0.80	18.32	216.00	0.000	0.000	997.52	0.00	0.00
14	137.00	Ericsson RRUS-12	6	30.945	34.040	0.56	0.80	10.58	313.20	0.000	0.000	576.44	0.00	0.00
15	137.00	Ericsson RRUS-11	6	30.945	34.040	0.57	0.80	8.59	275.40	0.000	0.000	467.74	0.00	0.00
16	137.00	CCI DTMABP7819VG12A	6	30.945	34.040	0.54	0.80	3.67	103.68	0.000	0.000	199.68	0.00	0.00
17	137.00	Platform w/ Hand Rails	1	30.945	34.040	1.00	1.00	40.00	1800.00	0.000	0.000	2178.54	0.00	0.00
18	137.00	DC6-48-60-18-8F	3	30.945	34.040	0.64	0.80	2.82	85.86	0.000	0.000	153.72	0.00	0.00
19	137.00	Quintel QS66512-2	3	30.945	34.040	0.73	0.80	17.91	299.70	0.000	0.000	975.55	0.00	0.00
20	137.00	Ericsson RRUS-32	3	30.945	34.040	0.70	0.80	8.08	207.90	0.000	0.000	440.10	0.00	0.00
21	137.00	Ericsson RRU A2	6	30.945	34.040	0.50	0.80	5.54	114.48	0.000	0.000	301.48	0.00	0.00
22	137.00	CCI HPA-65R-BUU-H8	3	30.945	34.040	0.63	0.80	24.61	183.60	0.000	0.000	1340.35	0.00	0.00
23	127.00	KMW/ ETCR-654L12H6	3	30.455	33.501	0.57	0.80	26.77	267.30	0.000	0.000	1434.90	0.00	0.00
24	127.00	Decibel/ DB844H90E-XY	9	30.455	33.501	0.60	0.80	16.47	113.40	0.000	0.000	882.81	0.00	0.00
25	127.00	DragonWave/	2	30.455	33.501	1.00	1.00	16.86	22.14	0.000	0.000	903.72	0.00	0.00
26	127.00	Platform w/ Handrails	1	30.455	33.501	1.00	1.00	42.00	1800.00	0.000	0.000	2251.26	0.00	0.00
27	127.00	ALU/ 1900MHz - RRH	3	30.455	33.501	0.54	0.80	4.45	162.00	0.000	0.000	238.75	0.00	0.00
28	127.00	ALU/ 800 MHz - RRH	6	30.455	33.501	0.40	0.80	5.98	286.20	0.000	0.000	320.32	0.00	0.00
29	127.00	ALU/ TD-RRH8x20-25 -	3	30.455	33.501	0.54	0.80	6.51	189.00	0.000	0.000	349.07	0.00	0.00
30	122.00	CS72188.01 Omni	1	30.455	33.501	1.00	1.00	3.00	22.50	0.000	5.000	160.80	0.00	804.02

Totals: **9,750.64** **23,015.70**

Total Applied Force Summary

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 15

Load Case: 0.9D + 1.6W 97 mph Wind

Dead Load Factor 0.90
Wind Load Factor 1.60



Iterations 23

Elev (ft)	Description	Lateral FX (-) (lb)	Axial FY (-) (lb)	Torsion MY (lb-ft)	Moment MZ (lb-ft)
0.00		0.00	0.00	0.00	0.00
5.00		559.02	1639.75	0.00	0.00
10.00		547.73	1610.59	0.00	0.00
15.00		536.43	1581.43	0.00	0.00
20.00		557.19	1552.28	0.00	0.00
25.00		571.43	1523.12	0.00	0.00
30.00		580.73	1493.96	0.00	0.00
35.00		586.40	1464.80	0.00	0.00
38.50		410.62	1008.01	0.00	0.00
40.00		178.14	729.55	0.00	0.00
45.00		599.46	2397.49	0.00	0.00
50.00		598.37	1176.27	0.00	0.00
55.00		595.66	1152.58	0.00	0.00
60.00		591.57	1128.88	0.00	0.00
65.00		586.26	1105.19	0.00	0.00
70.00		579.88	1081.50	0.00	0.00
75.00		572.53	1057.80	0.00	0.00
78.00		338.70	623.31	0.00	0.00
80.00		227.14	666.84	0.00	0.00
83.50		394.86	1150.83	0.00	0.00
85.00		167.43	248.98	0.00	0.00
90.00		554.15	818.08	0.00	0.00
95.00		543.85	799.86	0.00	0.00
100.00		532.94	781.63	0.00	0.00
105.00		521.44	763.41	0.00	0.00
110.00		509.42	745.18	0.00	0.00
113.50		348.67	510.79	0.00	0.00
115.00		149.41	341.01	0.00	0.00
118.00		295.74	673.17	0.00	0.00
120.00		194.37	244.50	0.00	0.00
122.00	(1) attachments	353.04	264.66	0.00	804.02
125.00		284.55	358.44	0.00	0.00
127.00	(27) attachments	6567.63	3076.08	0.00	0.00
130.00		276.24	317.14	0.00	0.00
135.00		449.74	516.91	0.00	0.00
137.00	(46) attachments	8882.87	4095.45	0.00	0.00
140.00		258.92	260.77	0.00	0.00
145.00		420.18	422.95	0.00	0.00
148.00	(23) attachments	5963.79	2090.82	0.00	0.00
150.00		159.75	137.15	0.00	0.00
155.00		389.23	332.68	0.00	0.00
158.00	(4) attachments	2272.83	1343.89	0.00	0.00
	Totals:	39,708.31	43,287.73	0.00	804.02

Calculated Forces

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 16

Load Case: 0.9D + 1.6W 97 mph Wind

Dead Load Factor 0.90
Wind Load Factor 1.60



Iterations

23

Seg Elev (ft)	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Total Deflect (in)	Rotation Sway (deg)	Rotation Twist (deg)	Stress Ratio
0.00	-43.23	-39.77	0.00	-4582.4	0.00	4582.42	6641.65	3320.83	16223.6	8123.90	0.00	0.000	0.000	0.571
5.00	-41.49	-39.32	0.00	-4383.5	0.00	4383.59	6549.09	3274.55	15672.1	7847.74	0.08	-0.151	0.000	0.565
10.00	-39.78	-38.87	0.00	-4187.0	0.00	4187.01	6454.83	3227.41	15125.8	7574.18	0.32	-0.305	0.000	0.559
15.00	-38.09	-38.43	0.00	-3992.6	0.00	3992.67	6358.86	3179.43	14585.0	7303.35	0.73	-0.461	0.000	0.553
20.00	-36.44	-37.96	0.00	-3800.5	0.00	3800.54	6261.18	3130.59	14049.8	7035.38	1.29	-0.619	0.000	0.546
25.00	-34.82	-37.47	0.00	-3610.7	0.00	3610.76	6161.80	3080.90	13520.6	6770.39	2.03	-0.780	0.000	0.539
30.00	-33.23	-36.96	0.00	-3423.4	0.00	3423.44	6060.71	3030.36	12997.7	6508.52	2.93	-0.943	0.000	0.532
35.00	-31.68	-36.42	0.00	-3238.6	0.00	3238.65	5957.92	2978.96	12481.2	6249.90	4.01	-1.109	0.000	0.524
38.50	-30.63	-36.04	0.00	-3111.1	0.00	3111.17	5884.95	2942.47	12123.6	6070.85	4.87	-1.227	0.000	0.518
40.00	-29.84	-35.90	0.00	-3057.1	0.00	3057.12	5853.42	2926.71	11971.4	5994.64	5.26	-1.279	0.000	0.515
45.00	-27.35	-35.33	0.00	-2877.6	0.00	2877.61	4462.52	2231.26	9089.55	4551.53	6.69	-1.448	0.000	0.639
50.00	-26.08	-34.78	0.00	-2700.9	0.00	2700.98	4388.93	2194.47	8721.58	4367.27	8.30	-1.620	0.000	0.625
55.00	-24.82	-34.24	0.00	-2527.0	0.00	2527.07	4313.64	2156.82	8357.61	4185.02	10.11	-1.821	0.000	0.610
60.00	-23.59	-33.69	0.00	-2355.8	0.00	2355.87	4236.64	2118.32	7997.90	4004.90	12.12	-2.024	0.000	0.594
65.00	-22.39	-33.15	0.00	-2187.4	0.00	2187.40	4157.93	2078.96	7642.72	3827.04	14.35	-2.228	0.000	0.577
70.00	-21.22	-32.60	0.00	-2021.6	0.00	2021.66	4077.51	2038.76	7292.30	3651.57	16.80	-2.433	0.000	0.559
75.00	-20.10	-32.04	0.00	-1858.6	0.00	1858.66	3995.39	1997.70	6946.91	3478.62	19.45	-2.637	0.000	0.540
78.00	-19.43	-31.71	0.00	-1762.5	0.00	1762.55	3945.30	1972.65	6742.20	3376.11	21.15	-2.762	0.000	0.527
80.00	-18.71	-31.48	0.00	-1699.1	0.00	1699.13	3911.57	1955.78	6606.80	3308.31	22.33	-2.845	0.000	0.519
83.50	-17.53	-31.06	0.00	-1588.9	0.00	1588.94	2771.30	1385.65	4677.52	2342.24	24.47	-2.989	0.000	0.685
85.00	-17.21	-30.93	0.00	-1542.3	0.00	1542.34	2755.69	1377.84	4610.09	2308.47	25.41	-3.051	0.000	0.675
90.00	-16.29	-30.40	0.00	-1387.6	0.00	1387.69	2702.54	1351.27	4386.89	2196.71	28.74	-3.298	0.000	0.638
95.00	-15.40	-29.87	0.00	-1235.6	0.00	1235.69	2647.69	1323.84	4166.29	2086.24	32.33	-3.540	0.000	0.599
100.00	-14.54	-29.35	0.00	-1086.3	0.00	1086.32	2591.13	1295.56	3948.53	1977.20	36.16	-3.774	0.000	0.556
105.00	-13.70	-28.83	0.00	-939.56	0.00	939.56	2532.86	1266.43	3733.89	1869.72	40.23	-3.999	0.000	0.508
110.00	-12.91	-28.31	0.00	-795.40	0.00	795.40	2472.89	1236.44	3522.60	1763.92	44.53	-4.212	0.000	0.457
113.50	-12.37	-27.95	0.00	-696.31	0.00	696.31	2429.89	1214.95	3376.84	1690.93	47.67	-4.354	0.000	0.417
115.00	-12.00	-27.79	0.00	-654.40	0.00	654.40	2411.21	1205.60	3314.94	1659.93	49.05	-4.413	0.000	0.400
118.00	-11.31	-27.46	0.00	-571.03	0.00	571.03	1790.62	895.31	2454.63	1229.14	51.86	-4.524	0.000	0.472
120.00	-11.05	-27.26	0.00	-516.11	0.00	516.11	1774.20	887.10	2396.85	1200.21	53.77	-4.594	0.000	0.437
122.00	-10.77	-26.91	0.00	-460.79	0.00	460.79	1757.50	878.75	2339.36	1171.42	55.71	-4.672	0.000	0.400
125.00	-10.40	-26.61	0.00	-380.07	0.00	380.07	1731.94	865.97	2253.71	1128.53	58.68	-4.777	0.000	0.344
127.00	-7.86	-19.81	0.00	-326.86	0.00	326.86	1714.56	857.28	2197.01	1100.14	60.69	-4.840	0.000	0.302
130.00	-7.53	-19.53	0.00	-267.41	0.00	267.41	1687.98	843.99	2112.62	1057.88	63.76	-4.924	0.000	0.258
135.00	-7.03	-19.04	0.00	-169.79	0.00	169.79	1642.31	821.15	1973.86	988.40	68.97	-5.033	0.000	0.177
137.00	-3.73	-9.83	0.00	-131.71	0.00	131.71	1623.56	811.78	1919.06	960.96	71.09	-5.068	0.000	0.140
140.00	-3.49	-9.56	0.00	-102.20	0.00	102.20	1594.93	797.47	1837.67	920.20	74.28	-5.109	0.000	0.113
145.00	-3.10	-9.10	0.00	-54.42	0.00	54.42	1545.85	772.93	1704.31	853.42	79.65	-5.159	0.000	0.066
148.00	-1.55	-2.97	0.00	-27.12	0.00	27.12	1515.59	757.79	1625.76	814.09	82.90	-5.177	0.000	0.034
150.00	-1.43	-2.80	0.00	-21.17	0.00	21.17	1495.07	747.53	1574.03	788.19	85.07	-5.185	0.000	0.028
155.00	-1.13	-2.39	0.00	-7.16	0.00	7.16	1442.53	721.26	1447.04	724.60	90.50	-5.197	0.000	0.011
158.00	0.00	-2.27	0.00	0.00	0.00	0.00	1400.09	700.04	1362.73	682.38	93.76	-5.199	0.000	0.000

Wind Loading - Shaft

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1 **Topography:** 1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 17

Load Case: 1.2D + 1.0Di + 1.0Wi 50 mph Wind

Dead Load Factor 1.20
Wind Load Factor 1.00



Iterations

22

Elev (ft)	Description	Kzt	Kz	qz (psf)	qzGh (psf)	C (mph-ft)	Cf	Ice Thick (in)	Tributary (ft)	Aa (sf)	CfAa (sf)	Wind Force X (lb)	Dead Load (lb)	Tot Dead Load (lb)
0.00		1.00	0.85	5.168	5.68	0.00	1.200	0.000	0.00	0.000	0.00	0.0	0.0	0.0
5.00		1.00	0.85	5.168	5.68	0.00	1.200	1.242	5.00	26.158	31.39	178.4	467.0	2374.8
10.00		1.00	0.85	5.168	5.68	0.00	1.200	1.331	5.00	25.725	30.87	175.5	491.3	2360.1
15.00		1.00	0.85	5.168	5.68	0.00	1.200	1.386	5.00	25.263	30.32	172.3	501.7	2331.6
20.00		1.00	0.90	5.483	6.03	0.00	1.200	1.427	5.00	24.789	29.75	179.4	505.9	2297.0
25.00		1.00	0.95	5.747	6.32	0.00	1.200	1.459	5.00	24.308	29.17	184.4	506.7	2258.9
30.00		1.00	0.98	5.972	6.57	0.00	1.200	1.486	5.00	23.823	28.59	187.8	505.1	2218.4
35.00		1.00	1.01	6.169	6.79	0.00	1.200	1.509	5.00	23.335	28.00	190.0	501.8	2176.2
38.50 Bot - Section 2		1.00	1.04	6.294	6.92	0.00	1.200	1.523	3.50	16.041	19.25	133.3	349.1	1498.1
40.00		1.00	1.04	6.345	6.98	0.00	1.200	1.529	1.50	6.903	8.28	57.8	151.5	1040.6
45.00 Top - Section 1		1.00	1.07	6.504	7.15	0.00	1.200	1.547	5.00	22.695	27.23	194.9	499.5	3417.5
50.00		1.00	1.09	6.650	7.32	0.00	1.200	1.564	5.00	22.201	26.64	194.9	493.2	1782.9
55.00		1.00	1.12	6.785	7.46	0.00	1.200	1.579	5.00	21.706	26.05	194.4	486.2	1744.4
60.00		1.00	1.14	6.910	7.60	0.00	1.200	1.592	5.00	21.210	25.45	193.5	478.6	1705.2
65.00		1.00	1.16	7.028	7.73	0.00	1.200	1.605	5.00	20.713	24.86	192.1	470.5	1665.5
70.00		1.00	1.17	7.138	7.85	0.00	1.200	1.617	5.00	20.215	24.26	190.5	462.0	1625.4
75.00		1.00	1.19	7.243	7.97	0.00	1.200	1.628	5.00	19.717	23.66	188.5	453.0	1584.8
78.00 Bot - Section 3		1.00	1.20	7.303	8.03	0.00	1.200	1.635	3.00	11.589	13.91	111.7	268.5	932.4
80.00		1.00	1.21	7.342	8.08	0.00	1.200	1.639	2.00	7.732	9.28	74.9	180.1	957.7
83.50 Top - Section 2		1.00	1.22	7.408	8.15	0.00	1.200	1.646	3.50	13.340	16.01	130.4	310.5	1649.9
85.00		1.00	1.22	7.436	8.18	0.00	1.200	1.649	1.50	5.642	6.77	55.4	132.2	380.6
90.00		1.00	1.24	7.526	8.28	0.00	1.200	1.658	5.00	18.483	22.18	183.6	430.8	1242.9
95.00		1.00	1.25	7.612	8.37	0.00	1.200	1.667	5.00	17.983	21.58	180.7	420.7	1208.5
100.00		1.00	1.27	7.695	8.46	0.00	1.200	1.676	5.00	17.482	20.98	177.6	410.3	1173.9
105.00		1.00	1.28	7.774	8.55	0.00	1.200	1.684	5.00	16.981	20.38	174.3	399.7	1139.0
110.00		1.00	1.29	7.851	8.64	0.00	1.200	1.692	5.00	16.480	19.78	170.8	389.0	1103.9
113.50 Bot - Section 4		1.00	1.30	7.903	8.69	0.00	1.200	1.697	3.50	11.237	13.48	117.2	266.9	752.9
115.00		1.00	1.30	7.925	8.72	0.00	1.200	1.699	1.50	4.804	5.76	50.3	115.0	486.1
118.00 Top - Section 3		1.00	1.31	7.968	8.76	0.00	1.200	1.704	3.00	9.473	11.37	99.6	226.0	956.4
120.00		1.00	1.32	7.996	8.80	0.00	1.200	1.707	2.00	6.215	7.46	65.6	148.9	363.4
122.00 Appurtenance(s)		1.00	1.32	8.024	8.83	0.00	1.200	1.710	2.00	6.134	7.36	65.0	147.1	358.5
125.00		1.00	1.33	8.065	8.87	0.00	1.200	1.714	3.00	9.051	10.86	96.4	216.5	527.9
127.00 Appurtenance(s)		1.00	1.33	8.092	8.90	0.00	1.200	1.716	2.00	5.934	7.12	63.4	142.5	346.2
130.00		1.00	1.34	8.132	8.95	0.00	1.200	1.720	3.00	8.750	10.50	93.9	209.7	509.3
135.00		1.00	1.35	8.197	9.02	0.00	1.200	1.727	5.00	14.183	17.02	153.5	337.9	821.8
137.00 Appurtenance(s)		1.00	1.35	8.222	9.04	0.00	1.200	1.729	2.00	5.532	6.64	60.0	133.3	321.4
140.00		1.00	1.36	8.260	9.09	0.00	1.200	1.733	3.00	8.147	9.78	88.8	195.7	472.0
145.00		1.00	1.37	8.321	9.15	0.00	1.200	1.739	5.00	13.178	15.81	144.7	314.3	759.3
148.00 Appurtenance(s)		1.00	1.37	8.357	9.19	0.00	1.200	1.743	3.00	7.665	9.20	84.6	184.3	441.9
150.00		1.00	1.38	8.381	9.22	0.00	1.200	1.745	2.00	5.009	6.01	55.4	120.9	288.8
155.00		1.00	1.39	8.439	9.28	0.00	1.200	1.751	5.00	12.172	14.61	135.6	290.2	696.3
158.00 Appurtenance(s)		1.00	1.39	8.473	9.32	0.00	1.200	1.754	3.00	7.061	8.47	79.0	169.7	404.1

Totals: **158.00** **5,520.1** **50,376.5**

Discrete Appurtenance Forces

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 18

Load Case: 1.2D + 1.0Di + 1.0Wi 50 mph Wind

Dead Load Factor 1.20
Wind Load Factor 1.00



Iterations

22

No.	Elev (ft)	Description	Qty	qz (psf)	qzGh (psf)	CaAa x Ka	Ka	Total CaAa (sf)	Dead Load (lb)	Horiz Ecc (ft)	Vert Ecc (ft)	Wind FX (lb)	Mom Y (lb-ft)	Mom Z (lb-ft)
1	158.00	APXV18-206517S-C	3	8.473	9.320	0.74	1.00	16.78	295.23	0.000	0.000	156.36	0.00	0.00
2	158.00	Low Profile Platform	1	8.473	9.320	1.00	1.00	46.05	2192.58	0.000	0.000	429.21	0.00	0.00
3	148.00	LNX-6514DS-A1M	2	8.357	9.193	0.66	0.80	14.59	348.67	0.000	0.000	134.16	0.00	0.00
4	148.00	HBXX-6517DS-A2M	6	8.357	9.193	0.62	0.80	42.37	1047.42	0.000	0.000	389.53	0.00	0.00
5	148.00	DB844G65VTZASX	6	8.357	9.193	0.74	0.80	28.17	1049.97	0.000	0.000	259.00	0.00	0.00
6	148.00	LNX-4514DS-A1M	1	8.357	9.193	0.57	0.80	5.01	83.99	0.000	0.000	46.08	0.00	0.00
7	148.00	DB-T1-6Z-8AB-0Z	1	8.357	9.193	0.73	0.80	3.57	289.26	0.000	0.000	32.79	0.00	0.00
8	148.00	RRH4X45-AWS	3	8.357	9.193	0.66	0.80	6.58	480.74	0.000	0.000	60.48	0.00	0.00
9	148.00	RRH2X60-PCS	3	8.357	9.193	0.71	0.80	6.06	451.16	0.000	0.000	55.67	0.00	0.00
10	148.00	Low Profile Platform	1	8.357	9.193	1.00	1.00	45.91	2185.72	0.000	0.000	422.08	0.00	0.00
11	137.00	Ericsson RRUS 32 B2	3	8.222	9.044	0.66	0.80	6.90	477.07	0.000	0.000	62.37	0.00	0.00
12	137.00	KMW	3	8.222	9.044	0.62	0.80	19.94	517.54	0.000	0.000	180.32	0.00	0.00
13	137.00	CCI OPA-65R-LCUU-H6	3	8.222	9.044	0.65	0.80	21.41	975.94	0.000	0.000	193.64	0.00	0.00
14	137.00	Ericsson RRUS-12	6	8.222	9.044	0.56	0.80	12.96	983.64	0.000	0.000	117.22	0.00	0.00
15	137.00	Ericsson RRUS-11	6	8.222	9.044	0.58	0.80	11.03	700.92	0.000	0.000	99.75	0.00	0.00
16	137.00	CCI DTMABP7819VG12A	6	8.222	9.044	0.54	0.80	6.12	246.18	0.000	0.000	55.34	0.00	0.00
17	137.00	Platform w/ Hand Rails	1	8.222	9.044	1.00	1.00	60.75	3875.36	0.000	0.000	549.48	0.00	0.00
18	137.00	DC6-48-60-18-8F	3	8.222	9.044	0.64	0.80	4.15	245.18	0.000	0.000	37.57	0.00	0.00
19	137.00	Quintel QS66512-2	3	8.222	9.044	0.74	0.80	20.94	998.92	0.000	0.000	189.40	0.00	0.00
20	137.00	Ericsson RRUS-32	3	8.222	9.044	0.71	0.80	8.75	614.27	0.000	0.000	79.18	0.00	0.00
21	137.00	Ericsson RRU A2	6	8.222	9.044	0.50	0.80	8.41	306.15	0.000	0.000	76.04	0.00	0.00
22	137.00	CCI HPA-65R-BUU-H8	3	8.222	9.044	0.63	0.80	27.64	1108.77	0.000	0.000	250.02	0.00	0.00
23	127.00	KMW/ ETCR-654L12H6	3	8.092	8.901	0.58	0.80	30.00	1306.58	0.000	0.000	267.03	0.00	0.00
24	127.00	Decibel/ DB844H90E-XY	9	8.092	8.901	0.60	0.80	21.10	1126.74	0.000	0.000	187.79	0.00	0.00
25	127.00	DragonWave/	2	8.092	8.901	1.00	1.00	20.22	-52.34	0.000	0.000	179.96	0.00	0.00
26	127.00	Platform w/ Handrails	1	8.092	8.901	1.00	1.00	76.60	4616.41	0.000	0.000	681.86	0.00	0.00
27	127.00	ALU/ 1900MHz - RRH	3	8.092	8.901	0.54	0.80	6.56	390.47	0.000	0.000	58.36	0.00	0.00
28	127.00	ALU/ 800 MHz - RRH	6	8.092	8.901	0.41	0.80	8.85	691.44	0.000	0.000	78.77	0.00	0.00
29	127.00	ALU/ TD-RRH8x20-25 -	3	8.092	8.901	0.54	0.80	7.91	576.79	0.000	0.000	70.44	0.00	0.00
30	122.00	CS72188.01 Omni	1	8.092	8.901	1.00	1.00	6.53	82.80	0.000	5.000	58.15	0.00	290.74

Totals: 28,213.59

5,458.05

Total Applied Force Summary

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 19

Load Case: 1.2D + 1.0Di + 1.0Wi 50 mph Wind

Dead Load Factor 1.20
Wind Load Factor 1.00



Iterations 22

Elev (ft)	Description	Lateral FX (-) (lb)	Axial FY (-) (lb)	Torsion MY (lb-ft)	Moment MZ (lb-ft)
0.00		0.00	0.00	0.00	0.00
5.00		178.45	2653.37	0.00	0.00
10.00		175.49	2638.73	0.00	0.00
15.00		172.34	2610.23	0.00	0.00
20.00		179.43	2575.62	0.00	0.00
25.00		184.41	2537.48	0.00	0.00
30.00		187.80	2497.00	0.00	0.00
35.00		190.02	2454.84	0.00	0.00
38.50		133.27	1693.10	0.00	0.00
40.00		57.82	1124.23	0.00	0.00
45.00		194.85	3696.16	0.00	0.00
50.00		194.89	2061.57	0.00	0.00
55.00		194.40	2022.97	0.00	0.00
60.00		193.47	1983.79	0.00	0.00
65.00		192.15	1944.10	0.00	0.00
70.00		190.48	1903.97	0.00	0.00
75.00		188.50	1863.44	0.00	0.00
78.00		111.72	1099.58	0.00	0.00
80.00		74.93	1069.19	0.00	0.00
83.50		130.45	1844.90	0.00	0.00
85.00		55.38	464.16	0.00	0.00
90.00		183.62	1521.54	0.00	0.00
95.00		180.70	1487.14	0.00	0.00
100.00		177.57	1452.49	0.00	0.00
105.00		174.27	1417.62	0.00	0.00
110.00		170.79	1382.54	0.00	0.00
113.50		117.22	947.96	0.00	0.00
115.00		50.25	569.68	0.00	0.00
118.00		99.63	1123.56	0.00	0.00
120.00		65.59	474.88	0.00	0.00
122.00	(1) attachments	123.12	552.77	0.00	290.74
125.00		96.36	694.47	0.00	0.00
127.00	(27) attachments	1587.58	9113.36	0.00	0.00
130.00		93.92	632.53	0.00	0.00
135.00		153.45	1027.08	0.00	0.00
137.00	(46) attachments	1950.36	11453.45	0.00	0.00
140.00		88.83	543.37	0.00	0.00
145.00		144.74	878.20	0.00	0.00
148.00	(23) attachments	1484.35	6450.22	0.00	0.00
150.00		55.41	303.78	0.00	0.00
155.00		135.58	733.74	0.00	0.00
158.00	(4) attachments	664.54	2914.34	0.00	0.00
Totals:		10,978.11	86,413.13	0.00	290.74

Calculated Forces

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 20

Load Case: 1.2D + 1.0Di + 1.0Wi 50 mph Wind

Dead Load Factor 1.20
Wind Load Factor 1.00



Iterations 22

Seg Elev (ft)	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Total Deflect (in)	Rotation Sway (deg)	Rotation Twist (deg)	Stress Ratio
0.00	-86.41	-11.01	0.00	-1263.6	0.00	1263.66	6641.65	3320.83	16223.6	8123.90	0.00	0.000	0.000	0.169
5.00	-83.75	-10.89	0.00	-1208.6	0.00	1208.61	6549.09	3274.55	15672.1	7847.74	0.02	-0.042	0.000	0.167
10.00	-81.10	-10.77	0.00	-1154.1	0.00	1154.15	6454.83	3227.41	15125.8	7574.18	0.09	-0.084	0.000	0.165
15.00	-78.48	-10.66	0.00	-1100.2	0.00	1100.29	6358.86	3179.43	14585.0	7303.35	0.20	-0.127	0.000	0.163
20.00	-75.90	-10.53	0.00	-1047.0	0.00	1047.01	6261.18	3130.59	14049.8	7035.38	0.36	-0.171	0.000	0.161
25.00	-73.36	-10.39	0.00	-994.37	0.00	994.37	6161.80	3080.90	13520.6	6770.39	0.56	-0.215	0.000	0.159
30.00	-70.85	-10.25	0.00	-942.41	0.00	942.41	6060.71	3030.36	12997.7	6508.52	0.81	-0.260	0.000	0.156
35.00	-68.39	-10.09	0.00	-891.17	0.00	891.17	5957.92	2978.96	12481.2	6249.90	1.11	-0.305	0.000	0.154
38.50	-66.69	-9.98	0.00	-855.84	0.00	855.84	5884.95	2942.47	12123.6	6070.85	1.34	-0.338	0.000	0.152
40.00	-65.56	-9.95	0.00	-840.87	0.00	840.87	5853.42	2926.71	11971.4	5994.64	1.45	-0.352	0.000	0.151
45.00	-61.86	-9.78	0.00	-791.13	0.00	791.13	4462.52	2231.26	9089.55	4551.53	1.84	-0.399	0.000	0.188
50.00	-59.79	-9.62	0.00	-742.23	0.00	742.23	4388.93	2194.47	8721.58	4367.27	2.29	-0.446	0.000	0.184
55.00	-57.76	-9.47	0.00	-694.11	0.00	694.11	4313.64	2156.82	8357.61	4185.02	2.78	-0.501	0.000	0.179
60.00	-55.77	-9.31	0.00	-646.76	0.00	646.76	4236.64	2118.32	7997.90	4004.90	3.34	-0.557	0.000	0.175
65.00	-53.82	-9.15	0.00	-600.21	0.00	600.21	4157.93	2078.96	7642.72	3827.04	3.95	-0.613	0.000	0.170
70.00	-51.91	-8.99	0.00	-554.45	0.00	554.45	4077.51	2038.76	7292.30	3651.57	4.63	-0.669	0.000	0.165
75.00	-50.04	-8.82	0.00	-509.49	0.00	509.49	3995.39	1997.70	6946.91	3478.62	5.36	-0.725	0.000	0.159
78.00	-48.94	-8.72	0.00	-483.04	0.00	483.04	3945.30	1972.65	6742.20	3376.11	5.82	-0.759	0.000	0.155
80.00	-47.87	-8.65	0.00	-465.60	0.00	465.60	3911.57	1955.78	6606.80	3308.31	6.15	-0.782	0.000	0.153
83.50	-46.02	-8.52	0.00	-435.31	0.00	435.31	2771.30	1385.65	4677.52	2342.24	6.73	-0.822	0.000	0.202
85.00	-45.55	-8.49	0.00	-422.53	0.00	422.53	2755.69	1377.84	4610.09	2308.47	7.00	-0.839	0.000	0.200
90.00	-44.02	-8.34	0.00	-380.07	0.00	380.07	2702.54	1351.27	4386.89	2196.71	7.91	-0.906	0.000	0.189
95.00	-42.53	-8.18	0.00	-338.38	0.00	338.38	2647.69	1323.84	4166.29	2086.24	8.90	-0.972	0.000	0.178
100.00	-41.07	-8.02	0.00	-297.48	0.00	297.48	2591.13	1295.56	3948.53	1977.20	9.95	-1.037	0.000	0.166
105.00	-39.65	-7.86	0.00	-257.37	0.00	257.37	2532.86	1266.43	3733.89	1869.72	11.07	-1.098	0.000	0.153
110.00	-38.26	-7.70	0.00	-218.05	0.00	218.05	2472.89	1236.44	3522.60	1763.92	12.25	-1.157	0.000	0.139
113.50	-37.31	-7.58	0.00	-191.11	0.00	191.11	2429.89	1214.95	3376.84	1690.93	13.11	-1.195	0.000	0.128
115.00	-36.74	-7.53	0.00	-179.74	0.00	179.74	2411.21	1205.60	3314.94	1659.93	13.49	-1.212	0.000	0.124
118.00	-35.62	-7.42	0.00	-157.14	0.00	157.14	1790.62	895.31	2454.63	1229.14	14.26	-1.242	0.000	0.148
120.00	-35.14	-7.36	0.00	-142.30	0.00	142.30	1774.20	887.10	2396.85	1200.21	14.79	-1.261	0.000	0.138
122.00	-34.59	-7.24	0.00	-127.28	0.00	127.28	1757.50	878.75	2339.36	1171.42	15.32	-1.283	0.000	0.128
125.00	-33.89	-7.14	0.00	-105.56	0.00	105.56	1731.94	865.97	2253.71	1128.53	16.14	-1.312	0.000	0.113
127.00	-24.82	-5.35	0.00	-91.28	0.00	91.28	1714.56	857.28	2197.01	1100.14	16.69	-1.330	0.000	0.097
130.00	-24.19	-5.26	0.00	-75.22	0.00	75.22	1687.98	843.99	2112.62	1057.88	17.54	-1.353	0.000	0.085
135.00	-23.16	-5.09	0.00	-48.93	0.00	48.93	1642.31	821.15	1973.86	988.40	18.97	-1.384	0.000	0.064
137.00	-11.76	-2.86	0.00	-38.76	0.00	38.76	1623.56	811.78	1919.06	960.96	19.55	-1.394	0.000	0.048
140.00	-11.22	-2.76	0.00	-30.18	0.00	30.18	1594.93	797.47	1837.67	920.20	20.43	-1.407	0.000	0.040
145.00	-10.34	-2.60	0.00	-16.37	0.00	16.37	1545.85	772.93	1704.31	853.42	21.92	-1.421	0.000	0.026
148.00	-3.93	-0.95	0.00	-8.57	0.00	8.57	1515.59	757.79	1625.76	814.09	22.81	-1.427	0.000	0.013
150.00	-3.63	-0.89	0.00	-6.67	0.00	6.67	1495.07	747.53	1574.03	788.19	23.41	-1.429	0.000	0.011
155.00	-2.90	-0.74	0.00	-2.21	0.00	2.21	1442.53	721.26	1447.04	724.60	24.91	-1.433	0.000	0.005
158.00	0.00	-0.66	0.00	0.00	0.00	0.00	1400.09	700.04	1362.73	682.38	25.81	-1.434	0.000	0.000

Seismic Segment Forces (Factored)

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1


Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II

10/17/2017



Page: 21

Load Case: 1.2D + 1.0E

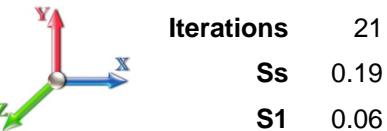

Gust Response Factor	1.10	Sds	0.20	Iterations	21
Dead Load Factor	1.20	Seismic Load Factor	1.00	Sd1	0.10
Wind Load Factor	0.00	Structure Frequency	0.39	SA	0.04
				Seismic Importance Factor	1.00

Top Elev (ft)	Description	Wz (lb)	Lateral Fs (lb)			R: 1.50
			a	b	c	
0.00		0.00	0.00	0.00	0.00	0.00
5.00		1589.7	0.00	0.03	0.02	28.36
10.00		1557.3	0.01	0.05	0.03	41.10
15.00		1524.9	0.02	0.06	0.04	46.96
20.00		1492.5	0.03	0.07	0.04	49.47
25.00		1460.1	0.05	0.07	0.04	50.39
30.00		1427.7	0.07	0.07	0.04	50.64
35.00		1395.3	0.09	0.07	0.04	50.68
38.50	Bot - Section 2	957.49	0.11	0.07	0.04	35.33
40.00		740.96	0.12	0.07	0.03	27.52
45.00	Top - Section 1	2431.7	0.15	0.07	0.03	92.03
50.00		1074.7	0.19	0.06	0.02	41.02
55.00		1048.4	0.23	0.06	0.02	39.51
60.00		1022.1	0.27	0.05	0.01	36.65
65.00		995.81	0.32	0.04	0.01	31.94
70.00		969.48	0.37	0.03	0.01	24.98
75.00		943.15	0.43	0.01	0.01	15.72
78.00	Bot - Section 3	553.26	0.46	0.00	0.01	5.52
80.00		648.06	0.48	-0.01	0.01	3.34
83.50	Top - Section 2	1116.1	0.53	-0.03	0.01	-4.16
85.00		206.99	0.55	-0.03	0.01	-1.56
90.00		676.80	0.61	-0.06	0.02	-13.27
95.00		656.55	0.68	-0.08	0.03	-19.11
100.00		636.30	0.76	-0.10	0.04	-22.09
105.00		616.05	0.83	-0.12	0.06	-22.00
110.00		595.80	0.92	-0.12	0.09	-18.97
113.50	Bot - Section 4	405.01	0.98	-0.12	0.12	-10.63
115.00		309.25	1.00	-0.11	0.13	-7.15
118.00	Top - Section 3	608.66	1.05	-0.09	0.16	-9.46
120.00		178.79	1.09	-0.08	0.18	-1.71
122.00	Appurtenance(s)	201.20	1.13	-0.05	0.20	-0.56
125.00		259.44	1.18	-0.01	0.24	2.29
127.00	Appurtenance(s)	3325.3	1.22	0.03	0.27	58.33
130.00		249.72	1.28	0.09	0.32	8.00
135.00		403.24	1.38	0.25	0.41	24.23
137.00	Appurtenance(s)	4482.0	1.42	0.32	0.45	325.83
140.00		230.28	1.48	0.46	0.52	21.44
145.00		370.84	1.59	0.75	0.66	48.62
148.00	Appurtenance(s)	2263.6	1.66	0.97	0.75	353.93
150.00		139.91	1.70	1.14	0.82	24.38
155.00		338.44	1.82	1.63	1.01	75.33
158.00	Appurtenance(s)	1474.4	1.89	1.98	1.14	374.74
	Totals:	41,578.3		1,857.6		
					Total Wind:	39,708.3

Seismic Base Shear is Less Than 50% of Wind Force - An Analysis is NOT Required

Calculated Forces

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1


Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II

10/17/2017



Page: 22

Load Case: 1.2D + 1.0E

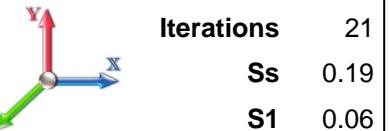

Gust Response Factor	1.10	Sds	0.20	Iterations	21
Dead Load Factor	1.20	Sd1	0.10	Ss	0.19
Wind Load Factor	0.00	SA	0.04	S1	0.06
				Seismic Importance Factor	1.00

Seg Elev (ft)	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Total Deflect (in)	Rotation Sway (deg)	Rotation Twist (deg)	Stress Ratio
0.00	-57.72	-1.99	0.00	-227.12	0.00	227.12	6641.65	3320.83	16223.6	8123.90	0.00	0.00	0.037	
5.00	-55.53	-1.97	0.00	-217.16	0.00	217.16	6549.09	3274.55	15672.1	7847.74	0.00	-0.01	0.036	
10.00	-53.38	-1.94	0.00	-207.31	0.00	207.31	6454.83	3227.41	15125.8	7574.18	0.02	-0.02	0.036	
15.00	-51.27	-1.90	0.00	-197.63	0.00	197.63	6358.86	3179.43	14585.0	7303.35	0.04	-0.02	0.035	
20.00	-49.20	-1.85	0.00	-188.15	0.00	188.15	6261.18	3130.59	14049.8	7035.38	0.06	-0.03	0.035	
25.00	-47.17	-1.81	0.00	-178.89	0.00	178.89	6161.80	3080.90	13520.6	6770.39	0.10	-0.04	0.034	
30.00	-45.18	-1.76	0.00	-169.86	0.00	169.86	6060.71	3030.36	12997.7	6508.52	0.15	-0.05	0.034	
35.00	-43.23	-1.71	0.00	-161.05	0.00	161.05	5957.92	2978.96	12481.2	6249.90	0.20	-0.05	0.033	
38.50	-41.88	-1.68	0.00	-155.05	0.00	155.05	5884.95	2942.47	12123.6	6070.85	0.24	-0.06	0.033	
40.00	-40.91	-1.66	0.00	-152.53	0.00	152.53	5853.42	2926.71	11971.4	5994.64	0.26	-0.06	0.032	
45.00	-37.71	-1.57	0.00	-144.25	0.00	144.25	4462.52	2231.26	9089.55	4551.53	0.33	-0.07	0.040	
50.00	-36.15	-1.53	0.00	-136.43	0.00	136.43	4388.93	2194.47	8721.58	4367.27	0.41	-0.08	0.039	
55.00	-34.61	-1.49	0.00	-128.79	0.00	128.79	4313.64	2156.82	8357.61	4185.02	0.50	-0.09	0.039	
60.00	-33.10	-1.46	0.00	-121.32	0.00	121.32	4236.64	2118.32	7997.90	4004.90	0.60	-0.10	0.038	
65.00	-31.63	-1.43	0.00	-114.02	0.00	114.02	4157.93	2078.96	7642.72	3827.04	0.71	-0.11	0.037	
70.00	-30.19	-1.41	0.00	-106.87	0.00	106.87	4077.51	2038.76	7292.30	3651.57	0.84	-0.12	0.037	
75.00	-28.78	-1.39	0.00	-99.82	0.00	99.82	3995.39	1997.70	6946.91	3478.62	0.97	-0.13	0.036	
78.00	-27.94	-1.39	0.00	-95.64	0.00	95.64	3945.30	1972.65	6742.20	3376.11	1.06	-0.14	0.035	
80.00	-27.06	-1.39	0.00	-92.86	0.00	92.86	3911.57	1955.78	6606.80	3308.31	1.12	-0.14	0.035	
83.50	-25.52	-1.39	0.00	-88.01	0.00	88.01	2771.30	1385.65	4677.52	2342.24	1.22	-0.15	0.047	
85.00	-25.19	-1.39	0.00	-85.93	0.00	85.93	2755.69	1377.84	4610.09	2308.47	1.27	-0.16	0.046	
90.00	-24.10	-1.39	0.00	-78.99	0.00	78.99	2702.54	1351.27	4386.89	2196.71	1.44	-0.17	0.045	
95.00	-23.03	-1.39	0.00	-72.03	0.00	72.03	2647.69	1323.84	4166.29	2086.24	1.63	-0.18	0.043	
100.00	-21.99	-1.40	0.00	-65.07	0.00	65.07	2591.13	1295.56	3948.53	1977.20	1.83	-0.20	0.041	
105.00	-20.97	-1.40	0.00	-58.09	0.00	58.09	2532.86	1266.43	3733.89	1869.72	2.04	-0.21	0.039	
110.00	-19.98	-1.40	0.00	-51.11	0.00	51.11	2472.89	1236.44	3522.60	1763.92	2.27	-0.22	0.037	
113.50	-19.30	-1.40	0.00	-46.22	0.00	46.22	2429.89	1214.95	3376.84	1690.93	2.44	-0.23	0.035	
115.00	-18.84	-1.40	0.00	-44.12	0.00	44.12	2411.21	1205.60	3314.94	1659.93	2.52	-0.24	0.034	
118.00	-17.94	-1.39	0.00	-39.94	0.00	39.94	1790.62	895.31	2454.63	1229.14	2.67	-0.25	0.043	
120.00	-17.62	-1.39	0.00	-37.15	0.00	37.15	1774.20	887.10	2396.85	1200.21	2.77	-0.25	0.041	
122.00	-17.26	-1.40	0.00	-34.36	0.00	34.36	1757.50	878.75	2339.36	1171.42	2.88	-0.26	0.039	
125.00	-16.79	-1.39	0.00	-30.17	0.00	30.17	1731.94	865.97	2253.71	1128.53	3.04	-0.26	0.036	
127.00	-12.68	-1.32	0.00	-27.38	0.00	27.38	1714.56	857.28	2197.01	1100.14	3.15	-0.27	0.032	
130.00	-12.26	-1.31	0.00	-23.43	0.00	23.43	1687.98	843.99	2112.62	1057.88	3.32	-0.28	0.029	
135.00	-11.57	-1.28	0.00	-16.89	0.00	16.89	1642.31	821.15	1973.86	988.40	3.62	-0.29	0.024	
137.00	-6.11	-0.93	0.00	-14.33	0.00	14.33	1623.56	811.78	1919.06	960.96	3.74	-0.29	0.019	
140.00	-5.77	-0.91	0.00	-11.54	0.00	11.54	1594.93	797.47	1837.67	920.20	3.92	-0.29	0.016	
145.00	-5.20	-0.86	0.00	-7.00	0.00	7.00	1545.85	772.93	1704.31	853.42	4.24	-0.30	0.012	
148.00	-2.42	-0.49	0.00	-4.44	0.00	4.44	1515.59	757.79	1625.76	814.09	4.43	-0.30	0.007	
150.00	-2.23	-0.46	0.00	-3.46	0.00	3.46	1495.07	747.53	1574.03	788.19	4.55	-0.30	0.006	
155.00	-1.79	-0.38	0.00	-1.15	0.00	1.15	1442.53	721.26	1447.04	724.60	4.87	-0.31	0.003	
158.00	0.00	-0.37	0.00	0.00	0.00	0.00	1400.09	700.04	1362.73	682.38	5.07	-0.31	0.000	

Seismic Segment Forces (Factored)

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1


Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II

10/17/2017



Page: 23

Load Case: 0.9D + 1.0E

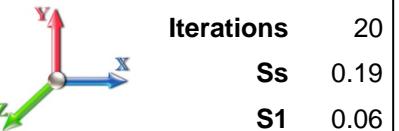

Gust Response Factor	1.10	Sds	0.20	Iterations	20
Dead Load Factor	0.90	Seismic Load Factor	1.00	Sd1	0.10
Wind Load Factor	0.00	Structure Frequency	0.39	SA	0.04
				Seismic Importance Factor	1.00

Top Elev (ft)	Description	Wz (lb)	Lateral Fs (lb)			R: 1.50
			a	b	c	
0.00		0.00	0.00	0.00	0.00	0.00
5.00		1589.7	0.00	0.03	0.02	28.36
10.00		1557.3	0.01	0.05	0.03	41.10
15.00		1524.9	0.02	0.06	0.04	46.96
20.00		1492.5	0.03	0.07	0.04	49.47
25.00		1460.1	0.05	0.07	0.04	50.39
30.00		1427.7	0.07	0.07	0.04	50.64
35.00		1395.3	0.09	0.07	0.04	50.68
38.50	Bot - Section 2	957.49	0.11	0.07	0.04	35.33
40.00		740.96	0.12	0.07	0.03	27.52
45.00	Top - Section 1	2431.7	0.15	0.07	0.03	92.03
50.00		1074.7	0.19	0.06	0.02	41.02
55.00		1048.4	0.23	0.06	0.02	39.51
60.00		1022.1	0.27	0.05	0.01	36.65
65.00		995.81	0.32	0.04	0.01	31.94
70.00		969.48	0.37	0.03	0.01	24.98
75.00		943.15	0.43	0.01	0.01	15.72
78.00	Bot - Section 3	553.26	0.46	0.00	0.01	5.52
80.00		648.06	0.48	-0.01	0.01	3.34
83.50	Top - Section 2	1116.1	0.53	-0.03	0.01	-4.16
85.00		206.99	0.55	-0.03	0.01	-1.56
90.00		676.80	0.61	-0.06	0.02	-13.27
95.00		656.55	0.68	-0.08	0.03	-19.11
100.00		636.30	0.76	-0.10	0.04	-22.09
105.00		616.05	0.83	-0.12	0.06	-22.00
110.00		595.80	0.92	-0.12	0.09	-18.97
113.50	Bot - Section 4	405.01	0.98	-0.12	0.12	-10.63
115.00		309.25	1.00	-0.11	0.13	-7.15
118.00	Top - Section 3	608.66	1.05	-0.09	0.16	-9.46
120.00		178.79	1.09	-0.08	0.18	-1.71
122.00	Appurtenance(s)	201.20	1.13	-0.05	0.20	-0.56
125.00		259.44	1.18	-0.01	0.24	2.29
127.00	Appurtenance(s)	3325.3	1.22	0.03	0.27	58.33
130.00		249.72	1.28	0.09	0.32	8.00
135.00		403.24	1.38	0.25	0.41	24.23
137.00	Appurtenance(s)	4482.0	1.42	0.32	0.45	325.83
140.00		230.28	1.48	0.46	0.52	21.44
145.00		370.84	1.59	0.75	0.66	48.62
148.00	Appurtenance(s)	2263.6	1.66	0.97	0.75	353.93
150.00		139.91	1.70	1.14	0.82	24.38
155.00		338.44	1.82	1.63	1.01	75.33
158.00	Appurtenance(s)	1474.4	1.89	1.98	1.14	374.74
	Totals:	41,578.3			1,857.6	
						Total Wind: 39,708.3

Seismic Base Shear is Less Than 50% of Wind Force - An Analysis is NOT Required

Calculated Forces

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1


Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II

10/17/2017



Page: 24

Load Case: 0.9D + 1.0E

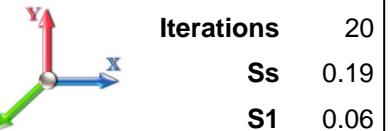

Gust Response Factor	1.10	Sds	0.20	Iterations	20
Dead Load Factor	0.90	Sd1	0.10	Ss	0.19
Wind Load Factor	0.00	SA	0.04	S1	0.06
				Seismic Importance Factor	1.00

Seg Elev (ft)	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Total Deflect (in)	Rotation Sway (deg)	Rotation Twist (deg)	Stress Ratio
0.00	-43.29	-1.99	0.00	-224.91	0.00	224.91	6641.65	3320.83	16223.6	8123.90	0.00	0.00	0.034	
5.00	-41.65	-1.97	0.00	-214.96	0.00	214.96	6549.09	3274.55	15672.1	7847.74	0.00	-0.01	0.034	
10.00	-40.04	-1.93	0.00	-205.13	0.00	205.13	6454.83	3227.41	15125.8	7574.18	0.02	-0.01	0.033	
15.00	-38.46	-1.89	0.00	-195.47	0.00	195.47	6358.86	3179.43	14585.0	7303.35	0.04	-0.02	0.033	
20.00	-36.90	-1.84	0.00	-186.03	0.00	186.03	6261.18	3130.59	14049.8	7035.38	0.06	-0.03	0.032	
25.00	-35.38	-1.80	0.00	-176.82	0.00	176.82	6161.80	3080.90	13520.6	6770.39	0.10	-0.04	0.032	
30.00	-33.89	-1.75	0.00	-167.84	0.00	167.84	6060.71	3030.36	12997.7	6508.52	0.14	-0.05	0.031	
35.00	-32.42	-1.70	0.00	-159.09	0.00	159.09	5957.92	2978.96	12481.2	6249.90	0.20	-0.05	0.031	
38.50	-31.41	-1.67	0.00	-153.13	0.00	153.13	5884.95	2942.47	12123.6	6070.85	0.24	-0.06	0.031	
40.00	-30.68	-1.64	0.00	-150.63	0.00	150.63	5853.42	2926.71	11971.4	5994.64	0.26	-0.06	0.030	
45.00	-28.28	-1.55	0.00	-142.42	0.00	142.42	4462.52	2231.26	9089.55	4551.53	0.33	-0.07	0.038	
50.00	-27.11	-1.51	0.00	-134.66	0.00	134.66	4388.93	2194.47	8721.58	4367.27	0.41	-0.08	0.037	
55.00	-25.96	-1.48	0.00	-127.10	0.00	127.10	4313.64	2156.82	8357.61	4185.02	0.50	-0.09	0.036	
60.00	-24.83	-1.44	0.00	-119.71	0.00	119.71	4236.64	2118.32	7997.90	4004.90	0.60	-0.10	0.036	
65.00	-23.72	-1.41	0.00	-112.50	0.00	112.50	4157.93	2078.96	7642.72	3827.04	0.71	-0.11	0.035	
70.00	-22.64	-1.39	0.00	-105.43	0.00	105.43	4077.51	2038.76	7292.30	3651.57	0.83	-0.12	0.034	
75.00	-21.58	-1.38	0.00	-98.48	0.00	98.48	3995.39	1997.70	6946.91	3478.62	0.96	-0.13	0.034	
78.00	-20.96	-1.37	0.00	-94.35	0.00	94.35	3945.30	1972.65	6742.20	3376.11	1.04	-0.14	0.033	
80.00	-20.29	-1.37	0.00	-91.61	0.00	91.61	3911.57	1955.78	6606.80	3308.31	1.10	-0.14	0.033	
83.50	-19.14	-1.37	0.00	-86.83	0.00	86.83	2771.30	1385.65	4677.52	2342.24	1.21	-0.15	0.044	
85.00	-18.89	-1.37	0.00	-84.78	0.00	84.78	2755.69	1377.84	4610.09	2308.47	1.26	-0.15	0.044	
90.00	-18.07	-1.37	0.00	-77.93	0.00	77.93	2702.54	1351.27	4386.89	2196.71	1.43	-0.17	0.042	
95.00	-17.27	-1.37	0.00	-71.08	0.00	71.08	2647.69	1323.84	4166.29	2086.24	1.61	-0.18	0.041	
100.00	-16.49	-1.37	0.00	-64.21	0.00	64.21	2591.13	1295.56	3948.53	1977.20	1.81	-0.20	0.039	
105.00	-15.73	-1.38	0.00	-57.34	0.00	57.34	2532.86	1266.43	3733.89	1869.72	2.02	-0.21	0.037	
110.00	-14.98	-1.38	0.00	-50.47	0.00	50.47	2472.89	1236.44	3522.60	1763.92	2.25	-0.22	0.035	
113.50	-14.47	-1.37	0.00	-45.66	0.00	45.66	2429.89	1214.95	3376.84	1690.93	2.41	-0.23	0.033	
115.00	-14.13	-1.38	0.00	-43.59	0.00	43.59	2411.21	1205.60	3314.94	1659.93	2.48	-0.23	0.032	
118.00	-13.46	-1.37	0.00	-39.47	0.00	39.47	1790.62	895.31	2454.63	1229.14	2.63	-0.24	0.040	
120.00	-13.21	-1.37	0.00	-36.72	0.00	36.72	1774.20	887.10	2396.85	1200.21	2.74	-0.25	0.038	
122.00	-12.95	-1.37	0.00	-33.97	0.00	33.97	1757.50	878.75	2339.36	1171.42	2.84	-0.25	0.036	
125.00	-12.59	-1.37	0.00	-29.85	0.00	29.85	1731.94	865.97	2253.71	1128.53	3.00	-0.26	0.034	
127.00	-9.51	-1.30	0.00	-27.11	0.00	27.11	1714.56	857.28	2197.01	1100.14	3.11	-0.27	0.030	
130.00	-9.19	-1.29	0.00	-23.20	0.00	23.20	1687.98	843.99	2112.62	1057.88	3.28	-0.27	0.027	
135.00	-8.68	-1.27	0.00	-16.74	0.00	16.74	1642.31	821.15	1973.86	988.40	3.58	-0.28	0.022	
137.00	-4.58	-0.92	0.00	-14.21	0.00	14.21	1623.56	811.78	1919.06	960.96	3.69	-0.29	0.018	
140.00	-4.32	-0.90	0.00	-11.44	0.00	11.44	1594.93	797.47	1837.67	920.20	3.88	-0.29	0.015	
145.00	-3.90	-0.85	0.00	-6.95	0.00	6.95	1545.85	772.93	1704.31	853.42	4.19	-0.30	0.011	
148.00	-1.81	-0.48	0.00	-4.41	0.00	4.41	1515.59	757.79	1625.76	814.09	4.37	-0.30	0.007	
150.00	-1.67	-0.46	0.00	-3.44	0.00	3.44	1495.07	747.53	1574.03	788.19	4.50	-0.30	0.005	
155.00	-1.34	-0.38	0.00	-1.15	0.00	1.15	1442.53	721.26	1447.04	724.60	4.81	-0.30	0.003	
158.00	0.00	-0.37	0.00	0.00	0.00	0.00	1400.09	700.04	1362.73	682.38	5.01	-0.30	0.000	

Wind Loading - Shaft

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1 **Topography:** 1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 25

Load Case: 1.0D + 1.0W 60 mph Wind

Dead Load Factor 1.00
Wind Load Factor 1.00



Iterations 22

Elev (ft)	Description	Kzt	Kz	qz (psf)	qzGh (psf)	C (mph-ft)	Cf	Ice Thick (in)	Tributary (ft)	Aa (sf)	CfAa (sf)	Wind Force X (lb)	Dead Load Ice (lb)	Tot Dead Load (lb)
0.00		1.00	0.85	7.442	8.19	280.76	0.650	0.000	0.00	0.000	0.00	0.0	0.0	0.0
5.00		1.00	0.85	7.442	8.19	275.14	0.650	0.000	5.00	25.123	16.33	133.7	0.0	1589.8
10.00		1.00	0.85	7.442	8.19	269.53	0.650	0.000	5.00	24.616	16.00	131.0	0.0	1557.4
15.00		1.00	0.85	7.442	8.19	263.91	0.650	0.000	5.00	24.108	15.67	128.3	0.0	1525.0
20.00		1.00	0.90	7.896	8.69	266.06	0.650	0.000	5.00	23.600	15.34	133.2	0.0	1492.6
25.00		1.00	0.95	8.276	9.10	266.46	0.650	0.000	5.00	23.093	15.01	136.6	0.0	1460.2
30.00		1.00	0.98	8.600	9.46	265.58	0.650	0.000	5.00	22.585	14.68	138.9	0.0	1427.8
35.00		1.00	1.01	8.883	9.77	263.79	0.650	0.000	5.00	22.077	14.35	140.2	0.0	1395.4
38.50 Bot - Section 2		1.00	1.04	9.064	9.97	262.11	0.650	0.000	3.50	15.152	9.85	98.2	0.0	957.5
40.00		1.00	1.04	9.137	10.05	261.30	0.650	0.000	1.50	6.521	4.24	42.6	0.0	741.0
45.00 Top - Section 1		1.00	1.07	9.366	10.30	258.26	0.650	0.000	5.00	21.406	13.91	143.3	0.0	2431.7
50.00		1.00	1.09	9.576	10.53	259.09	0.650	0.000	5.00	20.898	13.58	143.1	0.0	1074.8
55.00		1.00	1.12	9.770	10.75	255.26	0.650	0.000	5.00	20.390	13.25	142.4	0.0	1048.5
60.00		1.00	1.14	9.951	10.95	251.12	0.650	0.000	5.00	19.883	12.92	141.5	0.0	1022.1
65.00		1.00	1.16	10.120	11.13	246.69	0.650	0.000	5.00	19.375	12.59	140.2	0.0	995.8
70.00		1.00	1.17	10.279	11.31	242.02	0.650	0.000	5.00	18.867	12.26	138.7	0.0	969.5
75.00		1.00	1.19	10.430	11.47	237.14	0.650	0.000	5.00	18.360	11.93	136.9	0.0	943.2
78.00 Bot - Section 3		1.00	1.20	10.516	11.57	234.11	0.650	0.000	3.00	10.772	7.00	81.0	0.0	553.3
80.00		1.00	1.21	10.572	11.63	232.06	0.650	0.000	2.00	7.186	4.67	54.3	0.0	648.1
83.50 Top - Section 2		1.00	1.22	10.668	11.73	228.40	0.650	0.000	3.50	12.379	8.05	94.4	0.0	1116.2
85.00		1.00	1.22	10.708	11.78	230.32	0.650	0.000	1.50	5.229	3.40	40.0	0.0	207.0
90.00		1.00	1.24	10.838	11.92	224.93	0.650	0.000	5.00	17.101	11.12	132.5	0.0	676.8
95.00		1.00	1.25	10.962	12.06	219.39	0.650	0.000	5.00	16.593	10.79	130.1	0.0	656.5
100.00		1.00	1.27	11.081	12.19	213.73	0.650	0.000	5.00	16.086	10.46	127.4	0.0	636.3
105.00		1.00	1.28	11.195	12.31	207.94	0.650	0.000	5.00	15.578	10.13	124.7	0.0	616.1
110.00		1.00	1.29	11.305	12.44	202.04	0.650	0.000	5.00	15.070	9.80	121.8	0.0	595.8
113.50 Bot - Section 4		1.00	1.30	11.380	12.52	197.84	0.650	0.000	3.50	10.247	6.66	83.4	0.0	405.0
115.00		1.00	1.30	11.412	12.55	196.03	0.650	0.000	1.50	4.379	2.85	35.7	0.0	309.3
118.00 Top - Section 3		1.00	1.31	11.474	12.62	192.38	0.650	0.000	3.00	8.621	5.60	70.7	0.0	608.7
120.00		1.00	1.32	11.514	12.67	192.84	0.650	0.000	2.00	5.646	3.67	46.5	0.0	178.8
122.00 Appurtenance(s)		1.00	1.32	11.554	12.71	190.37	0.650	0.000	2.00	5.564	3.62	46.0	0.0	176.2
125.00		1.00	1.33	11.614	12.78	186.65	0.650	0.000	3.00	8.194	5.33	68.0	0.0	259.4
127.00 Appurtenance(s)		1.00	1.33	11.653	12.82	184.15	0.650	0.000	2.00	5.361	3.48	44.7	0.0	169.7
130.00		1.00	1.34	11.710	12.88	180.38	0.650	0.000	3.00	7.890	5.13	66.1	0.0	249.7
135.00		1.00	1.35	11.803	12.98	174.02	0.650	0.000	5.00	12.743	8.28	107.5	0.0	403.2
137.00 Appurtenance(s)		1.00	1.35	11.840	13.02	171.46	0.650	0.000	2.00	4.955	3.22	41.9	0.0	156.8
140.00		1.00	1.36	11.894	13.08	167.59	0.650	0.000	3.00	7.281	4.73	61.9	0.0	230.3
145.00		1.00	1.37	11.982	13.18	161.08	0.650	0.000	5.00	11.728	7.62	100.5	0.0	370.8
148.00 Appurtenance(s)		1.00	1.37	12.034	13.24	157.14	0.650	0.000	3.00	6.793	4.42	58.5	0.0	214.7
150.00		1.00	1.38	12.068	13.27	154.50	0.650	0.000	2.00	4.427	2.88	38.2	0.0	139.9
155.00		1.00	1.39	12.152	13.37	147.86	0.650	0.000	5.00	10.713	6.96	93.1	0.0	338.4
158.00 Appurtenance(s)		1.00	1.39	12.201	13.42	143.84	0.650	0.000	3.00	6.184	4.02	53.9	0.0	195.3

Totals: **158.00** **3,991.7** **30,744.2**

Discrete Appurtenance Forces

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 26

Load Case: 1.0D + 1.0W 60 mph Wind

Dead Load Factor 1.00
Wind Load Factor 1.00



Iterations

22

No.	Elev (ft)	Description	Qty	qz (psf)	qzGh (psf)	CaAa x Ka	Ka	Total CaAa (sf)	Dead Load (lb)	Horiz Ecc (ft)	Vert Ecc (ft)	Wind FX (lb)	Mom Y (lb-ft)	Mom Z (lb-ft)
1	158.00	APXV18-206517S-C	3	12.201	13.421	0.74	1.00	11.48	79.20	0.000	0.000	154.04	0.00	0.00
2	158.00	Low Profile Platform	1	12.201	13.421	1.00	1.00	25.00	1200.00	0.000	0.000	335.52	0.00	0.00
3	148.00	LNX-6514DS-A1M	2	12.034	13.238	0.66	0.80	10.85	77.60	0.000	0.000	143.62	0.00	0.00
4	148.00	HBXX-6517DS-A2M	6	12.034	13.238	0.62	0.80	31.60	244.80	0.000	0.000	418.32	0.00	0.00
5	148.00	DB844G65VTZASX	6	12.034	13.238	0.74	0.80	19.33	96.00	0.000	0.000	255.87	0.00	0.00
6	148.00	LNX-4514DS-A1M	1	12.034	13.238	0.57	0.80	3.86	29.54	0.000	0.000	51.05	0.00	0.00
7	148.00	DB-T1-6Z-8AB-0Z	1	12.034	13.238	0.73	0.80	2.98	44.00	0.000	0.000	39.51	0.00	0.00
8	148.00	RRH4X45-AWS	3	12.034	13.238	0.66	0.80	5.00	192.00	0.000	0.000	66.17	0.00	0.00
9	148.00	RRH2X60-PCS	3	12.034	13.238	0.71	0.80	4.70	165.00	0.000	0.000	62.21	0.00	0.00
10	148.00	Low Profile Platform	1	12.034	13.238	1.00	1.00	25.00	1200.00	0.000	0.000	330.94	0.00	0.00
11	137.00	Ericsson RRUS 32 B2	3	11.840	13.024	0.65	0.80	5.33	180.00	0.000	0.000	69.37	0.00	0.00
12	137.00	KMW	3	11.840	13.024	0.60	0.80	14.44	145.50	0.000	0.000	188.01	0.00	0.00
13	137.00	CCI OPA-65R-LCUU-H6	3	11.840	13.024	0.63	0.80	18.32	240.00	0.000	0.000	238.54	0.00	0.00
14	137.00	Ericsson RRUS-12	6	11.840	13.024	0.56	0.80	10.58	348.00	0.000	0.000	137.85	0.00	0.00
15	137.00	Ericsson RRUS-11	6	11.840	13.024	0.57	0.80	8.59	306.00	0.000	0.000	111.85	0.00	0.00
16	137.00	CCI DTMABP7819VG12A	6	11.840	13.024	0.54	0.80	3.67	115.20	0.000	0.000	47.75	0.00	0.00
17	137.00	Platform w/ Hand Rails	1	11.840	13.024	1.00	1.00	40.00	2000.00	0.000	0.000	520.96	0.00	0.00
18	137.00	DC6-48-60-18-8F	3	11.840	13.024	0.64	0.80	2.82	95.40	0.000	0.000	36.76	0.00	0.00
19	137.00	Quintel QS66512-2	3	11.840	13.024	0.73	0.80	17.91	333.00	0.000	0.000	233.29	0.00	0.00
20	137.00	Ericsson RRUS-32	3	11.840	13.024	0.70	0.80	8.08	231.00	0.000	0.000	105.24	0.00	0.00
21	137.00	Ericsson RRU A2	6	11.840	13.024	0.50	0.80	5.54	127.20	0.000	0.000	72.09	0.00	0.00
22	137.00	CCI HPA-65R-BUU-H8	3	11.840	13.024	0.63	0.80	24.61	204.00	0.000	0.000	320.52	0.00	0.00
23	127.00	KMW/ ETCR-654L12H6	3	11.653	12.818	0.57	0.80	26.77	297.00	0.000	0.000	343.13	0.00	0.00
24	127.00	Decibel/ DB844H90E-XY	9	11.653	12.818	0.60	0.80	16.47	126.00	0.000	0.000	211.11	0.00	0.00
25	127.00	DragonWave/	2	11.653	12.818	1.00	1.00	16.86	24.60	0.000	0.000	216.11	0.00	0.00
26	127.00	Platform w/ Handrails	1	11.653	12.818	1.00	1.00	42.00	2000.00	0.000	0.000	538.35	0.00	0.00
27	127.00	ALU/ 1900MHz - RRH	3	11.653	12.818	0.54	0.80	4.45	180.00	0.000	0.000	57.09	0.00	0.00
28	127.00	ALU/ 800 MHz - RRH	6	11.653	12.818	0.40	0.80	5.98	318.00	0.000	0.000	76.60	0.00	0.00
29	127.00	ALU/ TD-RRH8x20-25 -	3	11.653	12.818	0.54	0.80	6.51	210.00	0.000	0.000	83.47	0.00	0.00
30	122.00	CS72188.01 Omni	1	11.653	12.818	1.00	1.00	3.00	25.00	0.000	5.000	38.45	0.00	192.27

Totals: 10,834.04

5,503.81

Total Applied Force Summary

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 27

Load Case: 1.0D + 1.0W 60 mph Wind

Dead Load Factor 1.00
Wind Load Factor 1.00



Iterations 22

Elev (ft)	Description	Lateral FX (-) (lb)	Axial FY (-) (lb)	Torsion MY (lb-ft)	Moment MZ (lb-ft)
0.00		0.00	0.00	0.00	0.00
5.00		133.68	1821.95	0.00	0.00
10.00		130.98	1789.55	0.00	0.00
15.00		128.28	1757.15	0.00	0.00
20.00		133.24	1724.75	0.00	0.00
25.00		136.65	1692.35	0.00	0.00
30.00		138.87	1659.95	0.00	0.00
35.00		140.23	1627.56	0.00	0.00
38.50		98.19	1120.01	0.00	0.00
40.00		42.60	810.61	0.00	0.00
45.00		143.35	2663.88	0.00	0.00
50.00		143.09	1306.97	0.00	0.00
55.00		142.44	1280.64	0.00	0.00
60.00		141.46	1254.31	0.00	0.00
65.00		140.19	1227.99	0.00	0.00
70.00		138.67	1201.66	0.00	0.00
75.00		136.91	1175.33	0.00	0.00
78.00		80.99	692.56	0.00	0.00
80.00		54.32	740.93	0.00	0.00
83.50		94.43	1278.70	0.00	0.00
85.00		40.04	276.64	0.00	0.00
90.00		132.51	908.98	0.00	0.00
95.00		130.05	888.73	0.00	0.00
100.00		127.44	868.48	0.00	0.00
105.00		124.69	848.23	0.00	0.00
110.00		121.82	827.98	0.00	0.00
113.50		83.38	567.54	0.00	0.00
115.00		35.73	378.90	0.00	0.00
118.00		70.72	747.97	0.00	0.00
120.00		46.48	271.66	0.00	0.00
122.00	(1) attachments	84.42	294.07	0.00	192.27
125.00		68.04	398.27	0.00	0.00
127.00	(27) attachments	1570.54	3417.87	0.00	0.00
130.00		66.06	352.38	0.00	0.00
135.00		107.55	574.34	0.00	0.00
137.00	(46) attachments	2124.19	4550.50	0.00	0.00
140.00		61.92	289.74	0.00	0.00
145.00		100.48	469.94	0.00	0.00
148.00	(23) attachments	1426.14	2323.13	0.00	0.00
150.00		38.20	152.39	0.00	0.00
155.00		93.08	369.64	0.00	0.00
158.00	(4) attachments	543.51	1493.21	0.00	0.00
Totals:		9,495.56	48,097.48	0.00	192.27

Calculated Forces

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II


10/17/2017



Page: 28

Load Case: 1.0D + 1.0W 60 mph Wind

Dead Load Factor 1.00
Wind Load Factor 1.00



Iterations 22

Seg Elev (ft)	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Total Deflect (in)	Rotation Sway (deg)	Rotation Twist (deg)	Stress Ratio
0.00	-48.09	-9.51	0.00	-1100.2	0.00	1100.20	6641.65	3320.83	16223.6	8123.90	0.00	0.000	0.000	0.143
5.00	-46.27	-9.41	0.00	-1052.6	0.00	1052.65	6549.09	3274.55	15672.1	7847.74	0.02	-0.036	0.000	0.141
10.00	-44.47	-9.30	0.00	-1005.6	0.00	1005.62	6454.83	3227.41	15125.8	7574.18	0.08	-0.073	0.000	0.140
15.00	-42.71	-9.20	0.00	-959.11	0.00	959.11	6358.86	3179.43	14585.0	7303.35	0.17	-0.111	0.000	0.138
20.00	-40.98	-9.09	0.00	-913.12	0.00	913.12	6261.18	3130.59	14049.8	7035.38	0.31	-0.149	0.000	0.136
25.00	-39.28	-8.97	0.00	-867.67	0.00	867.67	6161.80	3080.90	13520.6	6770.39	0.49	-0.187	0.000	0.135
30.00	-37.61	-8.86	0.00	-822.80	0.00	822.80	6060.71	3030.36	12997.7	6508.52	0.70	-0.227	0.000	0.133
35.00	-35.98	-8.73	0.00	-778.52	0.00	778.52	5957.92	2978.96	12481.2	6249.90	0.96	-0.266	0.000	0.131
38.50	-34.86	-8.64	0.00	-747.97	0.00	747.97	5884.95	2942.47	12123.6	6070.85	1.17	-0.295	0.000	0.129
40.00	-34.04	-8.61	0.00	-735.01	0.00	735.01	5853.42	2926.71	11971.4	5994.64	1.26	-0.307	0.000	0.128
45.00	-31.38	-8.47	0.00	-691.98	0.00	691.98	4462.52	2231.26	9089.55	4551.53	1.61	-0.348	0.000	0.159
50.00	-30.06	-8.34	0.00	-649.62	0.00	649.62	4388.93	2194.47	8721.58	4367.27	1.99	-0.389	0.000	0.156
55.00	-28.78	-8.22	0.00	-607.90	0.00	607.90	4313.64	2156.82	8357.61	4185.02	2.43	-0.438	0.000	0.152
60.00	-27.52	-8.09	0.00	-566.82	0.00	566.82	4236.64	2118.32	7997.90	4004.90	2.91	-0.487	0.000	0.148
65.00	-26.28	-7.96	0.00	-526.38	0.00	526.38	4157.93	2078.96	7642.72	3827.04	3.45	-0.536	0.000	0.144
70.00	-25.08	-7.83	0.00	-486.59	0.00	486.59	4077.51	2038.76	7292.30	3651.57	4.04	-0.585	0.000	0.139
75.00	-23.90	-7.70	0.00	-447.43	0.00	447.43	3995.39	1997.70	6946.91	3478.62	4.68	-0.634	0.000	0.135
78.00	-23.20	-7.62	0.00	-424.34	0.00	424.34	3945.30	1972.65	6742.20	3376.11	5.08	-0.664	0.000	0.132
80.00	-22.46	-7.57	0.00	-409.10	0.00	409.10	3911.57	1955.78	6606.80	3308.31	5.37	-0.684	0.000	0.129
83.50	-21.18	-7.47	0.00	-382.62	0.00	382.62	2771.30	1385.65	4677.52	2342.24	5.88	-0.719	0.000	0.171
85.00	-20.90	-7.44	0.00	-371.42	0.00	371.42	2755.69	1377.84	4610.09	2308.47	6.11	-0.734	0.000	0.169
90.00	-19.98	-7.31	0.00	-334.24	0.00	334.24	2702.54	1351.27	4386.89	2196.71	6.91	-0.793	0.000	0.160
95.00	-19.09	-7.19	0.00	-297.68	0.00	297.68	2647.69	1323.84	4166.29	2086.24	7.77	-0.851	0.000	0.150
100.00	-18.21	-7.07	0.00	-261.74	0.00	261.74	2591.13	1295.56	3948.53	1977.20	8.70	-0.908	0.000	0.139
105.00	-17.36	-6.94	0.00	-226.42	0.00	226.42	2532.86	1266.43	3733.89	1869.72	9.68	-0.962	0.000	0.128
110.00	-16.53	-6.82	0.00	-191.71	0.00	191.71	2472.89	1236.44	3522.60	1763.92	10.71	-1.013	0.000	0.115
113.50	-15.96	-6.73	0.00	-167.84	0.00	167.84	2429.89	1214.95	3376.84	1690.93	11.47	-1.048	0.000	0.106
115.00	-15.58	-6.69	0.00	-157.74	0.00	157.74	2411.21	1205.60	3314.94	1659.93	11.80	-1.062	0.000	0.102
118.00	-14.83	-6.62	0.00	-137.66	0.00	137.66	1790.62	895.31	2454.63	1229.14	12.48	-1.089	0.000	0.120
120.00	-14.56	-6.57	0.00	-124.43	0.00	124.43	1774.20	887.10	2396.85	1200.21	12.94	-1.105	0.000	0.112
122.00	-14.27	-6.48	0.00	-111.10	0.00	111.10	1757.50	878.75	2339.36	1171.42	13.40	-1.124	0.000	0.103
125.00	-13.87	-6.41	0.00	-91.65	0.00	91.65	1731.94	865.97	2253.71	1128.53	14.12	-1.150	0.000	0.089
127.00	-10.48	-4.78	0.00	-78.82	0.00	78.82	1714.56	857.28	2197.01	1100.14	14.60	-1.165	0.000	0.078
130.00	-10.13	-4.71	0.00	-64.49	0.00	64.49	1687.98	843.99	2112.62	1057.88	15.34	-1.185	0.000	0.067
135.00	-9.55	-4.59	0.00	-40.95	0.00	40.95	1642.31	821.15	1973.86	988.40	16.60	-1.211	0.000	0.047
137.00	-5.05	-2.37	0.00	-31.77	0.00	31.77	1623.56	811.78	1919.06	960.96	17.11	-1.220	0.000	0.036
140.00	-4.76	-2.30	0.00	-24.66	0.00	24.66	1594.93	797.47	1837.67	920.20	17.88	-1.230	0.000	0.030
145.00	-4.29	-2.19	0.00	-13.13	0.00	13.13	1545.85	772.93	1704.31	853.42	19.17	-1.242	0.000	0.018
148.00	-2.00	-0.72	0.00	-6.55	0.00	6.55	1515.59	757.79	1625.76	814.09	19.95	-1.246	0.000	0.009
150.00	-1.85	-0.68	0.00	-5.11	0.00	5.11	1495.07	747.53	1574.03	788.19	20.48	-1.248	0.000	0.008
155.00	-1.48	-0.58	0.00	-1.73	0.00	1.73	1442.53	721.26	1447.04	724.60	21.79	-1.251	0.000	0.003
158.00	0.00	-0.54	0.00	0.00	0.00	0.00	1400.09	700.04	1362.73	682.38	22.57	-1.251	0.000	0.000

Final Analysis Summary

Structure: CT02722-S-SBA
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Topography: 1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II

10/17/2017



Page: 29

Reactions

Load Case	Shear FX (kips)	Shear FZ (kips)	Axial FY (kips)	Moment MX (ft-kips)	Moment MY (ft-kips)	Moment MZ (ft-kips)
1.2D + 1.6W 97 mph Wind	39.8	0.00	57.66	0.00	0.00	4622.59
0.9D + 1.6W 97 mph Wind	39.8	0.00	43.23	0.00	0.00	4582.42
1.2D + 1.0Di + 1.0Wi 50 mph Wind	11.0	0.00	86.41	0.00	0.00	1263.66
1.2D + 1.0E	2.0	0.00	57.72	0.00	0.00	227.12
0.9D + 1.0E	2.0	0.00	43.29	0.00	0.00	224.91
1.0D + 1.0W 60 mph Wind	9.5	0.00	48.09	0.00	0.00	1100.20

Max Stresses

Load Case	Pu FY (-) (kips)	Vu FX (-) (kips)	Tu MY (-) (ft-kips)	Mu MZ (ft-kips)	Mu MX (ft-kips)	Resultant Moment (ft-kips)	phi Pn (kips)	phi Vn (kips)	phi Tn (ft-kips)	phi Mn (ft-kips)	Elev (ft)	Stress Ratio
1.2D + 1.6W 97 mph Wind	-23.88	-31.41	0.00	-1610.1	0.00	-1610.1	2771.30	1385.6	4677.52	2342.24	83.50	0.697
0.9D + 1.6W 97 mph Wind	-17.53	-31.06	0.00	-1588.9	0.00	-1588.9	2771.30	1385.6	4677.52	2342.24	83.50	0.685
1.2D + 1.0Di + 1.0Wi 50 mph Wind	-46.02	-8.52	0.00	-435.31	0.00	-435.31	2771.30	1385.6	4677.52	2342.24	83.50	0.202
1.2D + 1.0E	-25.52	-1.39	0.00	-88.01	0.00	-88.01	2771.30	1385.6	4677.52	2342.24	83.50	0.047
0.9D + 1.0E	-19.14	-1.37	0.00	-86.83	0.00	-86.83	2771.30	1385.6	4677.52	2342.24	83.50	0.044
1.0D + 1.0W 60 mph Wind	-21.18	-7.47	0.00	-382.62	0.00	-382.62	2771.30	1385.6	4677.52	2342.24	83.50	0.171

Base Plate Summary

Structure: CT02722-S-SB
Site Name: Waterbury
Height: 158.00 (ft)
Base Elev: 0.000 (ft)
Gh: 1.1

Topography: 1

Code: EIA/TIA-222-G
Exposure: C
Crest Height: 0.00
Site Class: D - Stiff Soil
Struct Class: II

10/17/2017

Page: 30



Reactions		Base Plate		Anchor Bolts	
Original Design		Yield (ksi):	60.00	Bolt Circle:	67.00
Moment (kip-ft):	5150.00	Width (in):	66.00	Number Bolts:	20.00
Axial (kip):	41.00	Style:	Clipped	Bolt Type:	2.25" 18J
Shear (kip):	44.00	Polygon Sides:	4.00	Bolt Diameter (in):	2.25
Analysis		Clip Length (in):	12.00	Yield (ksi):	75.00
Moment (kip-ft):	4622.59	Effective Len (in):	8.52	Ultimate (ksi):	100.00
Axial (kip):	86.41	Moment (kip-in):	596.37	Arrangement:	Clustered
Shear (kip):	39.79	Allow Stress (ksi):	81.00	Cluster Dist (in):	5.00
		Applied Stress (ksi):	0.00	Start Angle (deg):	45.00
Moment Design %:	89.76	Stress Ratio:	0.49	Compression	
				Force (kip):	169.91
				Allowable (kip):	260.00
				Ratio:	0.67
		Tension			
				Force (kip):	161.26
				Allowable (kip):	260.00
				Ratio:	0.64



Monopole Mat Foundation Design

Date
10/17/2017
EIA/TIA Standard:
EIA-222-G
Structure Height (Ft.):
158
Engineer Name:
D. Zhou
Engineer Login ID:

Foundation Info Obtained from:
Structure Type:

Drawings/Calculations

Analysis or Design?

Monopole

Analysis

Base Reactions (Factored):

Axial Load (Kips):

86.4

Shear Force (Kips):

39.8

Uplift Force (Kips):

0.0

Moment (Kips-ft):

4622.6

Allowable overstress %:

5.0%

Foundation Geometries:

Diameter of Pier (ft.):

7.5

Mods required -Yes/No ?:

No

Pier Height A. G. (ft.):

0.50

Depth of Base BG (ft.):

4.5

Length of Pad (ft.):

29.5

Thickness of Pad (ft.):

4.00

Width of Pad (ft.):

29.5

Final Length of pad (ft)

29.5

Material Properties and Reabr Info:

Concrete Strength (psi):

3000

Steel Elastic Modulus:

29000 ksi

Vertical bar yield (ksi):

60

Tie steel yield (ksi):

60

Vertical Rebar Size #:

60

Tie / Stirrup Size #:

60

Qty. of Vertical Rebars:

60

Tie Spacing (in):

9

Pad Rebar Yield (Ksi):

60

Pad Steel Rebar Size (#):

9

Concrete Cover (in.):

3

Unit Weight of Concrete:

150.0 pcf

Rebar at the bottom of the concrete pad:

38

Qty. of Rebar in Pad (L):

38

Qty. of Rebar in Pad (W):

38

Qty. of Rebar in Pad (W):

38

Apply 1.35 factor for e/w per G:

1.35

Soil Design Parameters:

Soil Unit Weight (pcf):

125.0

Soil Buoyant Weight:

50.0 Pcf

Water Table B.G.S. (ft.):

99.0

Unit Weight of Water:

62.4 pcf

Ultimate Bearing Pressure (psf):

40000

Ultimate Skin Friction:

Psf

Consider Friction for O.T.M. (Y/N):

No

Consider Friction for bearing (Y/N):

No

Consider soil hor. resist. for OTM.:

No

Consider Friction for bearing (Y/N):

No

Reduction factor on the maximum soil bearing pressure:

1.00

Foundation Analysis and Design:

Uplift Strength Reduction Factor:

0.75

Compression Strength Reduction Factor:

0.75

Total Dry Soil Volume (cu. Ft.):

413.04

Total Dry Soil Weight (Kips):

51.63

Total Buoyant Soil Volume (cu. Ft.):

0.00

Total Buoyant Soil Weight (Kips):

0.00

Total Effective Soil Weight (Kips):

51.63

Weight from the Concrete Block at Top (K):

0.00

Total Dry Concrete Volume (cu. Ft.):

3525.18

Total Dry Concrete Weight (Kips):

528.78

Total Buoyant Concrete Volume (cu. Ft.):

0.00

Total Buoyant Concrete Weight (Kips):

0.00

Total Effective Concrete Weight (Kips):

528.78

Total Vertical Load on Base (Kips):

666.81

Check Soil Capacities:

Calculated Maximum Net Soil Pressure under the base (psf):

2080

<

Allowable Factored Soil Bearing (psf):

30000

0.07

OK!

Allowable Foundation Overturning Resistance (kips-ft.):

8979.3

>

Design Factored Moment (kips-ft.):

4822


0.54

OK!

Factor of Safety Against Overturning (O. R. Moment/Design Moment):

1.86

OK!

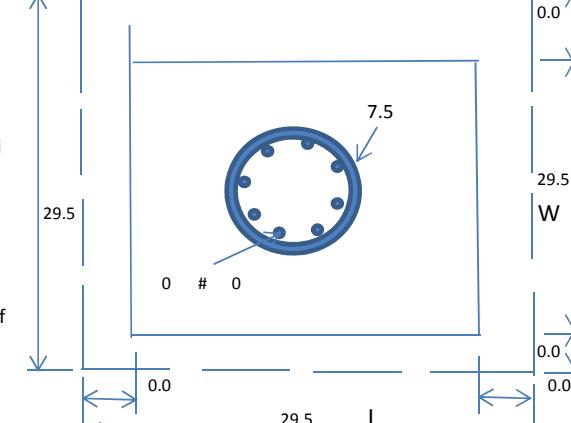 Load/
Capacity
Ratio


Check the capacities of Reinforcing Concrete:


Strength reduction factor (Flexure and axial tension):	0.90	Strength reduction factor (Shear):	0.75	
Strength reduction factor (Axial compression):	0.65	Wind Load Factor on Concrete Design:	1.00	
Load/ Capacity Ratio				
(1) Concrete Pier:				
Vertical Steel Rebar Area (sq. in./each):	#N/A	Tie / Stirrup Area (sq. in./each):	#N/A	
Calculated Moment Capacity (Mn,Kips-Ft):	#N/A	Design Factored Moment (Mu, Kips-Ft)	4662.4	#N/A ####
Calculated Shear Capacity (Kips):	#N/A	Design Factored Shear (Kips):	39.8	#N/A ####
Calculated Tension Capacity (Tn, Kips):	#N/A	Design Factored Tension (Tu Kips):	0.0	#N/A ####
Calculated Compression Capacity (Pn, Kips):	#N/A	Design Factored Axial Load (Pu Kips):	86.4	#N/A ####
Moment & Axial Strength Combination:	#N/A	Check Tie Spacing (Design/Required):	#DIV/0!	####
Pier Reinforcement Ratio:	#N/A		#N/A	

(2).Concrete Pad:

One-Way Design Shear Capacity (L-Direction, Kips):	1292.4	>	One-Way Factored Shear (L-D. Kips):	262.4	0.20	OK!
One-Way Design Shear Capacity (W-Direction, Kips):	1292.4	>	One-Way Factored Shear (W-D., Kips):	262.4	0.20	OK!
One-Way Design Shear Capacity (Corner-Corner. Kips):	1499.2	>	One-Way Factored Shear (C-C, Kips):	255.5	0.17	OK!
Lower Steel Pad Reinforcement Ratio (L-Direct.):	0.0024	OK!	Lower Steel Pad Reinf. Ratio (W-Direc	0.0024		
Lower Steel Pad Moment Capacity (L-Direction. Kips-ft):	7382.9	>	Moment at Bottom (L-Direct. K-Ft):	957.3	0.13	OK!
Lower Steel Pad Moment Capacity (W-Direction. Kips-ft):	7382.9	>	Moment at Bottom (W-Direct. K-Ft):	957.3	0.13	OK!
Lower Steel Pad Moment Capacity (Corner-Corner,K-ft):	10374.0	>	Moment at Bottom (C-C Dir. K-Ft):	1353.9	0.13	OK!
Upper Steel Pad Reinforcement Ratio (L-Direct.):	0.0024	OK!	Upper Steel Reinf. Ratio (W-Direct.):	0.0024		
Upper Steel Pad Moment Capacity (L-Direction. Kips-ft):	7382.9	>	Moment at the top (L-Dir Kips-Ft):	82.0	0.01	OK!
Upper Steel Pad Moment Capacity (W-Direction. Kips-ft):	7382.9	>	Moment at the top (W-Dir Kips-Ft):	82.0	0.01	OK!
Upper Steel Pad Moment Capacity (Corner-Corner. K-ft):	10374.0	>	Moment at the top (C-C Direc. K-Ft):	593.9	0.06	OK!

SPECIAL CONSTRUCTION NOTE:
SPRINT WORK IS CONTINGENT ON THE FOLLOWING:
* COMPLETION OF A GLOBAL STRUCTURAL STABILITY ANALYSIS.
* COMPLETION OF A MOUNT STRUCTURAL ANALYSIS.
* GC SHALL FURNISH, INSTALL AND COMPLETE ALL REQUIRED STRUCTURAL MODIFICATIONS AS INDICATED IN BEFORE-MENTIONED GLOBAL AND MOUNT ANALYSIS.

Sprint®

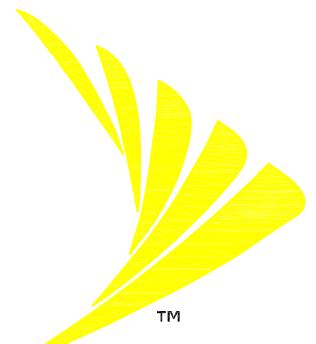


SITE NAME: WATERBURY NORTH
SITE NUMBER: CT52XC053
AUGMENT ID: CT-NHN0003Q17.1
SITE ADDRESS: 299 SHEFFIELD STREET
JURISDICTION: CITY OF WATERBURY / CT SITING COUNCIL
SITE TYPE: EXISTING 158' MONOPOLE
PROGRAM: DO MACRO UPGRADE EQUIPMENT DEPLOYMENT



SBA COMMUNICATIONS CORP.
 134 FLANDERS ROAD, SUITE 125
 WESTBOROUGH, MA 01581
 TEL: (508) 251-0720



4 Bay Road, Building A
 Suite 200
 Hadley, MA 01035 Ph:(413)320-4918

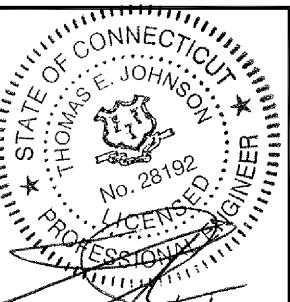

CHECKED BY: 12/7/17 JMM/TEJ

APPROVED BY: JMM/TEJ

SUBMITTALS			
REV.	DATE	DESCRIPTION	BY
0	12/07/17	ISSUED FOR CONSTRUCTION	JMM/TEJ

SITE NUMBER:
CT52XC053
 SITE NAME:
WATERBURY NORTH

SITE ADDRESS:
 299 SHEFFIELD STREET
 WATERBURY, CT 06704

SHEET TITLE
TITLE SHEET

SHEET NUMBER
T - 1

PROJECT INFORMATION	
SITE INFORMATION	
LATITUDE: (PER SBA RECORD)	41° 35' 38.72" N (41.5941°)
LONGITUDE: (PER SBA RECORD)	73° 03' 02.04" W (-73.0506°)
GROUND ELEVATION:	512' ± AMSL (PER GOOGLE EARTH)
STRUCTURE HEIGHT:	158' ± AGL (FROM RECORD STRUCTURAL)
STRUCTURE TYPE:	MONOPOLE
ZONING JURISDICTION	CITY OF WATERBURY / CT SITING COUNCIL
ZONING DISTRICT/ OCCUPANCY:	RL (LOW DENSITY RESIDENTIAL)
COUNTY:	NEW HAVEN
APPLICANT	
SPRINT	1 INTERNATIONAL BLVD, SUITE 800 MAHWAH, NJ 07495
PROPERTY OWNER:	
N/F LEVEL DEVELOPMENT CORPORATION	293 SHEFFIELD STREET WATERBURY, CT 06704
TOWER OWNER:	
SBA TOWERS, LLC	8051 CONGRESS AVENUE BOCA RATON, FL 33487 (561) 995-7670
SBA SITE ID:	CT02722-S
SBA SITE NAME:	WATERBURY
SBA CONTACT:	
STEPHEN ROTH	(860) 539-4920 SRoth@sbsite.com

CALL CONNECTICUT ONE CALL



(800) 922-4455

CALL 3 WORKING DAYS

BEFORE YOU DIG!



Know what's below.
Call before you dig.
www.call811.com

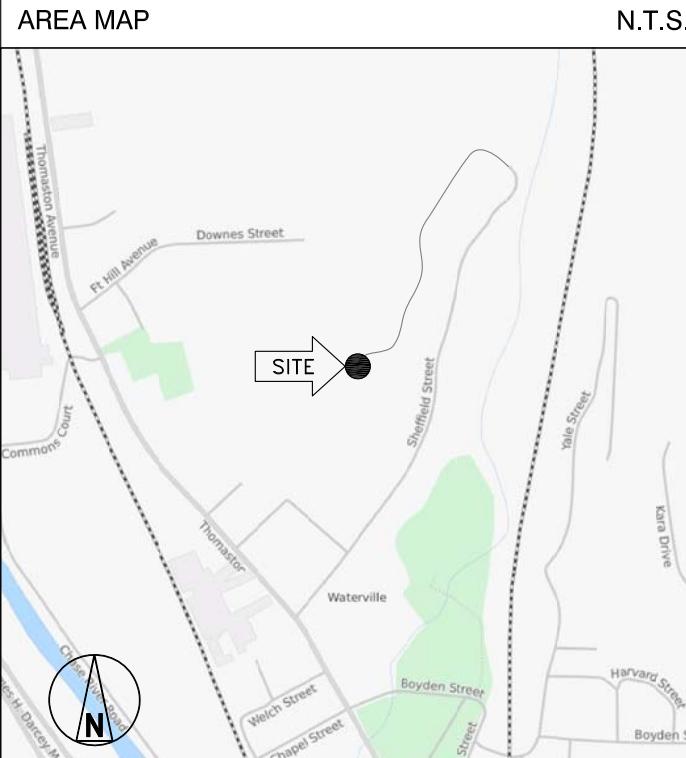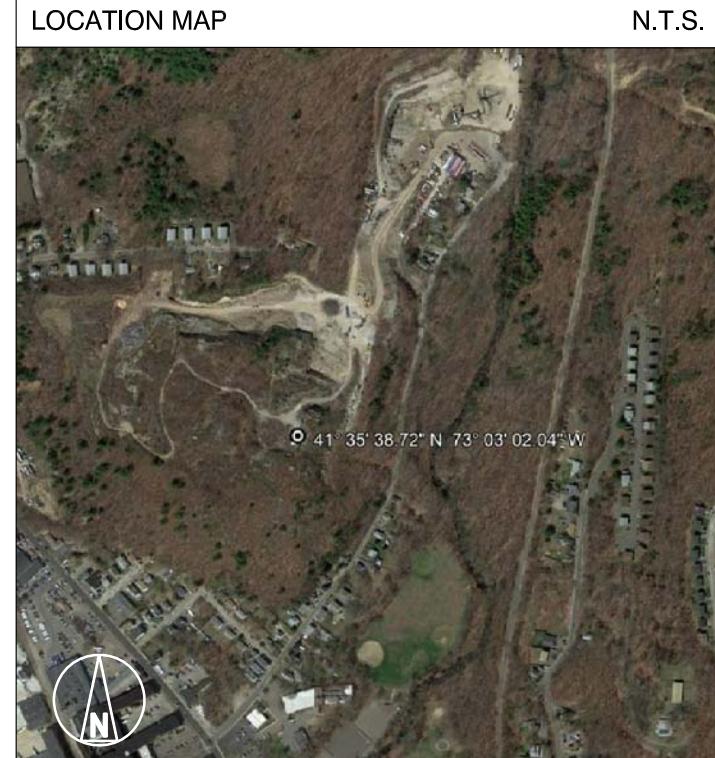

SCOPE OF WORK	
1. REMOVE (1) EXISTING SPRINT (CLEARWIRE) TOWER TOP JUNCTION BOXES. 2. REMOVE EXISTING CABLING AND REPLACE WITH (4) HYBRID CABLES. 3. REMOVE (3) EXISTING SPRINT (CLEARWIRE) PANEL ANTENNAS AND REPLACE WITH (3) NEW SPRINT PANEL ANTENNAS. 4. REMOVE (3) EXISTING SPRINT (CLEARWIRE) RRHS. 5. INSTALL (6) NEW SPRINT 800 MHz RRHS. 6. INSTALL (3) NEW SPRINT 1900 MHz RRHS. 7. INSTALL (3) NEW SPRINT 2500 MHz RRHS. 8. REMOVE EXISTING SPRINT (CLEARWIRE) EQUIPMENT RACK IN SHELTER AND REPLACE WITH NEW SPRINT EQUIPMENT CABINET IN SHELTER WITH CABLING CABINET. 9. REMOVE EXISTING SPRINT (CLEARWIRE) GPS ANTENNA AND REPLACE WITH NEW SPRINT GPS ANTENNA.	

GENERAL NOTES	
1. THIS IS AN UNMANNED TELECOMMUNICATION FACILITY AND NOT FOR HUMAN HABITATION: <ul style="list-style-type: none">• ADA COMPLIANCE NOT REQUIRED.• POTABLE WATER OR SANITARY SERVICE IS NOT REQUIRED.• NO OUTDOOR STORAGE OR ANY SOLID WASTE RECEPTACLES REQUIRED.	
2. CONTRACTOR SHALL VERIFY ALL PLANS, EXISTING DIMENSIONS, AND CONDITIONS ON JOB SITE. CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT/ENGINEER IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK. FAILURE TO NOTIFY THE ARCHITECT/ENGINEER PLACE THE RESPONSIBILITY ON THE CONTRACTOR TO CORRECT THE DISCREPANCIES AT THE CONTRACTOR'S EXPENSE.	

DRAWING INDEX		
SHEET NO.	SHEET DESCRIPTION	REV. NO.
T-1	TITLE SHEET	0
SP-1	OUTLINE SPECIFICATIONS	0
SP-2	OUTLINE SPECIFICATIONS	0
SP-3	OUTLINE SPECIFICATIONS	0
A-1	COMPOUND PLAN	0
A-2	ELEVATION AND ANTENNA PLANS	0
A-3	TOWER EQUIPMENT DETAILS	0
S-1	ANTENNA AND RRH MOUNTING DETAILS	0
S-2	GROUND EQUIPMENT DETAILS	0
E-1	ELECTRICAL AND GROUNDING DETAILS	0
RF-1	RF DATA SHEET	0
RF-2	PLUMBING DIAGRAM AND RAN WIRING	0

CODE COMPLIANCE			
1.	2016 CONNECTICUT STATE BUILDING CODE WITH AMENDMENTS.		
2.	2014 NATIONAL ELECTRICAL CODE WITH AMENDMENTS		
3.	TIA-EIA-222-G		

BASED ON INFORMATION PROVIDED BY SPRINT, THIS TELECOMMUNICATIONS EQUIPMENT DEPLOYMENT IS CONSIDERED AN ELIGIBLE FACILITY UNDER THE TAX RELIEF ACT OF 2012, 47 USC 1455(A), AND IS SUBJECT TO AN EXPEDITED ELIGIBLE FACILITIES REQUEST/REVIEW AND ZONING PRE-EMPTION FOR LOCAL DISCRETIONARY PERMITS (VARIANCE, SPECIAL PERMIT, SITE PLAN REVIEW).

APPROVALS		
TITLE	SIGNATURE	DATE
PROJECT MANAGER:		
CONSTRUCTION:		
RF ENGINEER:		
ZONING/SITE ACQ:		
OPERATIONS:		
TOWER OWNER:		

THE FOLLOWING PARTIES HEREBY APPROVE AND ACCEPT THESE DOCUMENTS AND AUTHORIZE THE CONTRACTOR TO PROCEED WITH THE CONSTRUCTION DESCRIBED HEREIN. ALL DOCUMENTS ARE SUBJECT TO REVIEW BY THE LOCAL BUILDING DEPARTMENT AND MAY IMPOSE CHANGES OR MODIFICATIONS.

THESE OUTLINE SPECIFICATIONS IN CONJUNCTION WITH THE SPRINT STANDARD CONSTRUCTION SPECIFICATIONS, INCLUDING CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

SECTION 01 100 - SCOPE OF WORK

PART 1 - GENERAL

1.1 **THE WORK:** THESE STANDARD CONSTRUCTION SPECIFICATIONS IN CONJUNCTION WITH THE SPRINT CONSTRUCTION STANDARDS FOR WIRELESS SITES, CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

1.2 **RELATED DOCUMENTS:**

- A. THE REQUIREMENTS OF THIS SECTION APPLY TO ALL SECTIONS IN THIS SPECIFICATION.
- B. SPRINT "STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES" ARE INCLUDED IN AND MADE A PART OF THESE SPECIFICATIONS HEREWITHE.

1.3 **PRECEDENCE:** SHOULD CONFLICTS OCCUR BETWEEN THE STANDARD CONSTRUCTION SPECIFICATIONS FOR WIRELESS SITES INCLUDING THE STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES AND THE CONSTRUCTION DRAWINGS, INFORMATION ON THE CONSTRUCTION DRAWINGS SHALL TAKE PRECEDENCE. NOTIFY SPRINT CONSTRUCTION MANAGER IF THIS OCCURS.

1.4 **NATIONALLY RECOGNIZED CODES AND STANDARDS:**

A. THE WORK SHALL COMPLY WITH APPLICABLE NATIONAL AND LOCAL CODES AND STANDARDS, LATEST EDITION, AND PORTIONS THEREOF, INCLUDED BUT NOT LIMITED TO THE FOLLOWING:

1. GR-78-CORE GENERIC REQUIREMENTS FOR THE PHYSICAL DESIGN AND MANUFACTURE OF TELECOMMUNICATIONS EQUIPMENT.
2. GR-1089 CORE, ELECTROMAGNETIC COMPATIBILITY AND ELECTRICAL SAFETY -GENERIC CRITERIA FOR NETWORK TELECOMMUNICATIONS EQUIPMENT.
3. NATIONAL FIRE PROTECTION ASSOCIATION CODES AND STANDARDS (NFPA) INCLUDING NFPA 70 (NATIONAL ELECTRICAL CODE - 'NEC') AND NFPA 101 (LIFE SAFETY CODE).
4. AMERICAN SOCIETY FOR TESTING OF MATERIALS (ASTM)
5. INSTITUTE OF ELECTRONIC AND ELECTRICAL ENGINEERS (IEEE)
6. AMERICAN CONCRETE INSTITUTE (ACI)
7. AMERICAN WIRE PRODUCERS ASSOCIATION (AWPA)
8. CONCRETE REINFORCING STEEL INSTITUTE (CRSI)
9. AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)
10. PORTLAND CEMENT ASSOCIATION (PCA)
11. NATIONAL CONCRETE MASONRY ASSOCIATION (NCMA)
12. BRICK INDUSTRY ASSOCIATION (BIA)
13. AMERICAN WELDING SOCIETY (AWS)
14. NATIONAL ROOFING CONTRACTORS ASSOCIATION (NRCA)
15. SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)
16. DOOR AND HARDWARE INSTITUTE (DHI)
17. OCCUPATIONAL SAFETY AND HEALTH ACT (OSHA)
18. APPLICABLE BUILDING CODES INCLUDING UNIFORM BUILDING CODE, SOUTHERN BUILDING CODE, BOCA, AND THE INTERNATIONAL BUILDING CODE.

1.5 **DEFINITIONS:**

- A. **WORK:** THE SUM OF TASKS AND RESPONSIBILITIES IDENTIFIED IN THE CONTRACT DOCUMENTS.
- B. **COMPANY:** SPRINT CORPORATION
- C. **ENGINEER:** SYNONYMOUS WITH ARCHITECT & ENGINEER AND "A&E". THE DESIGN PROFESSIONAL HAVING PROFESSIONAL RESPONSIBILITY FOR DESIGN OF THE PROJECT.
- D. **CONTRACTOR:** CONSTRUCTION CONTRACTOR; CONSTRUCTION VENDOR; INDIVIDUAL OR ENTITY WHO AFTER EXECUTION OF A CONTRACT IS BOUND TO ACCOMPLISH THE WORK.
- E. **THIRD PARTY VENDOR OR AGENCY:** A VENDOR OR AGENCY ENGAGED SEPARATELY BY THE COMPANY, A&E, OR CONTRACTOR TO PROVIDE MATERIALS OR TO ACCOMPLISH SPECIFIC TASKS RELATED TO BUT NOT INCLUDED IN THE WORK.
- F. **OFCI:** OWNER FURNISHED, CONTRACTOR INSTALLED EQUIPMENT.
- G. **CONSTRUCTION MANAGER -** ALL PROJECTS RELATED COMMUNICATION TO FLOW THROUGH SPRINT REPRESENTATIVE IN CHARGE OF PROJECT...

1.6 **SITE FAMILIARITY:** CONTRACTOR SHALL BE RESPONSIBLE FOR FAMILIARIZING HIMSELF WITH ALL CONTRACT DOCUMENTS, FIELD CONDITIONS AND DIMENSIONS PRIOR TO PROCEEDING WITH CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE SPRINT CONSTRUCTION MANAGER PRIOR TO THE COMMENCEMENT OF WORK. NO COMPENSATION WILL BE AWARDED BASED ON CLAIM OF LACK OF KNOWLEDGE OR FIELD CONDITIONS.

1.7 **POINT OF CONTACT:** COMMUNICATION BETWEEN SPRINT AND THE CONTRACTOR SHALL FLOW THROUGH THE SINGLE SPRINT CONSTRUCTION MANAGER APPOINTED TO MANAGE THE PROJECT FOR SPRINT.

1.8 **ON-SITE SUPERVISION:** THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE WORK AND SHALL BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, AND PROCEDURES IN ACCORDANCE WITH THE CONTRACT DOCUMENTS. THE CONTRACTOR SHALL EMPLOY A COMPETENT SUPERINTENDENT WHO SHALL BE IN ATTENDANCE AT THE SITE AT ALL TIMES DURING PERFORMANCE OF THE WORK.

1.9 **DRAWINGS, SPECIFICATIONS AND DETAILS REQUIRED AT JOBSITE:** THE CONSTRUCTION CONTRACTOR SHALL MAINTAIN A FULL SET OF THE CONSTRUCTION DRAWINGS, STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES AND THE STANDARD CONSTRUCTION SPECIFICATIONS FOR WIRELESS SITES AT THE JOBSITE FROM MOBILIZATION THROUGH CONSTRUCTION COMPLETION.

A. THE JOBSITE DRAWINGS, SPECIFICATIONS AND DETAILS SHALL BE CLEARLY MARKED DAILY IN RED PENCIL WITH ANY CHANGES IN CONSTRUCTION OVER WHAT IS DEPICTED IN THE DOCUMENTS. AT CONSTRUCTION COMPLETION, THIS JOBSITE MARKUP SET SHALL BE DELIVERED TO THE COMPANY OR COMPANY'S DESIGNATED REPRESENTATIVE TO BE FORWARDED TO THE COMPANY'S A&E VENDOR FOR PRODUCTION OF "AS-BUILT" DRAWINGS.

B. DETAILS ARE INTENDED TO SHOW DESIGN INTENT. MODIFICATIONS MAY BE REQUIRED TO SUIT JOB DIMENSIONS OR CONDITIONS, AND SUCH MODIFICATIONS SHALL BE INCLUDED AS PART OF THE WORK. CONTRACTOR SHALL NOTIFY SPRINT CONSTRUCTION MANAGER OF ANY VARIATIONS PRIOR TO PROCEEDING WITH THE WORK.

C. DIMENSIONS SHOWN ARE TO FINISH SURFACES UNLESS NOTED OTHERWISE. SPACING BETWEEN EQUIPMENT IS THE REQUIRED CLEARANCE. SHOULD THERE BE ANY QUESTIONS REGARDING THE CONTRACT DOCUMENTS, EXISTING CONDITIONS AND/OR DESIGN INTENT, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING A CLARIFICATION FROM THE SPRINT CONSTRUCTION MANAGER PRIOR TO PROCEEDING WITH THE WORK.

1.10 **USE OF JOBSITE:** THE CONTRACTOR SHALL CONFINE ALL CONSTRUCTION AND RELATED OPERATIONS INCLUDING STAGING AND STORAGE OF MATERIALS AND EQUIPMENT, PARKING, TEMPORARY FACILITIES, AND WASTE STORAGE TO THE LEASE PARCEL UNLESS OTHERWISE PERMITTED BY THE CONTRACT DOCUMENTS.

SECTION 01 300 - CELL SITE CONSTRUCTION

PART 1 - GENERAL

1.1 **THE WORK:** THESE STANDARD CONSTRUCTION SPECIFICATIONS IN CONJUNCTION WITH THE OTHER CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

1.2 **RELATED DOCUMENTS:**

- A. THE REQUIREMENTS OF THIS SECTION APPLY TO ALL SECTIONS IN THIS SPECIFICATION.
- B. SPRINT "STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES" ARE INCLUDED IN AND MADE A PART OF THESE SPECIFICATIONS HEREWITHE.

1.3 **NOTICE TO PROCEED:**

- A. NO WORK SHALL COMMENCE PRIOR TO COMPANY'S WRITTEN NOTICE TO PROCEED AND THE ISSUANCE OF THE WORK ORDER.
- B. UPON RECEIVING NOTICE TO PROCEED, CONTRACTOR SHALL FULLY PERFORM ALL WORK NECESSARY TO PROVIDE SPRINT WITH AN OPERATIONAL WIRELESS FACILITY.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 **FUNCTIONAL REQUIREMENTS:**

- A. THE ACTIVITIES DESCRIBED IN THIS PARAGRAPH REPRESENT MINIMUM ACTIONS AND PROCESSES REQUIRED TO SUCCESSFULLY COMPLETE THE WORK. THE ACTIVITIES DESCRIBED ARE NOT EXHAUSTIVE, AND CONTRACTOR SHALL TAKE ANY AND ALL ACTIONS AS NECESSARY TO SUCCESSFULLY COMPLETE THE CONSTRUCTION OF A FULLY FUNCTIONING WIRELESS FACILITY AT THE SITE IN ACCORDANCE WITH COMPANY PROCESSES.
- B. SUBMIT SPECIFIC DOCUMENTATION AS INDICATED HEREIN, AND OBTAIN REQUIRED APPROVALS WHILE THE WORK IS BEING PERFORMED.
- C. MANAGE AND CONDUCT ALL FIELD CONSTRUCTION SERVICE RELATED ACTIVITIES
- D. PROVIDE CONSTRUCTION ACTIVITIES TO THE EXTENT REQUIRED BY THE CONTRACT DOCUMENTS, INCLUDING BUT NOT LIMITED TO THE FOLLOWING:

1. PERFORM ANY REQUIRED SITE ENVIRONMENTAL MITIGATION.


2. PREPARE GROUND SITES; PROVIDE DE-GRUBBING; AND ROUGH AND FINAL GRADING, AND COMPOUND SURFACE TREATMENTS.
3. MANAGE AND CONDUCT ALL ACTIVITIES FOR INSTALLATION OF UTILITIES INCLUDING ELECTRICAL AND TELCO BACKHAUL.
4. INSTALL UNDERGROUND FACILITIES INCLUDING UNDERGROUND POWER AND COMMUNICATIONS CONDUITS, AND UNDERGROUND GROUNDING SYSTEM.
5. INSTALL ABOVE GROUND GROUNDING SYSTEMS.
6. PROVIDE NEW HVAC INSTALLATIONS AND MODIFICATIONS.
7. INSTALL "H-FRAMES", CABINETS AND SHELTERS AS INDICATED.
8. INSTALL ROADS, ACCESS WAYS, CURBS AND DRAINS AS INDICATED.
9. ACCOMPLISH REQUIRED MODIFICATION OF EXISTING FACILITIES.
10. PROVIDE ANTENNA SUPPORT STRUCTURE FOUNDATIONS.
11. PROVIDE SLABS AND EQUIPMENT PLATFORMS.
12. INSTALL COMPOUND FENCING, SIGHT SHIELDING, LANDSCAPING AND ACCESS BARRIERS.
13. PERFORM INSPECTION AND MATERIAL TESTING AS REQUIRED HEREINAFTER.
14. CONDUCT SITE RESISTANCE TO EARTH TESTING AS REQUIRED HEREINAFTER.
15. INSTALL FIXED GENERATOR SETS AND OTHER STANDBY POWER SOLUTIONS.
16. INSTALL TOWERS, ANTENNA SUPPORT STRUCTURES AND PLATFORMS ON EXISTING TOWERS AS REQUIRED.
17. INSTALL CELL SITE RADIOS, MICROWAVE, GPS, COAXIAL MAINLINE, ANTENNAS, CROSS BAND COUPLERS, TOWER TOP AMPLIFIERS, LOW NOISE AMPLIFIERS AND RELATED EQUIPMENT.
18. PERFORM, DOCUMENT, AND CLOSE OUT ANY CONSTRUCTION CONTROL DOCUMENTS THAT MAY BE REQUIRED BY GOVERNMENT AGENCIES AND LANDLORDS.
19. PERFORM ANTENNAL AND COAX SWEEP TESTING AND MAKE ANY AND ALL NECESSARY CORRECTIONS.
20. REMAIN ON SITE MOBILIZED THROUGHOUT HAND-OFF AND INTEGRATION TO ASSIST AS NEEDED UNTIL SITE IS DEEMED SUBSTANTIALLY COMPLETE AND PLACED "ON AIR."

3.2 **GENERAL REQUIREMENTS FOR CIVIL CONSTRUCTION:**

- A. CONTRACTOR SHALL KEEP THE SITE FREE FROM ACCUMULATING WASTE MATERIAL, DEBRIS, AND TRASH. AT THE COMPLETION OF THE WORK, CONTRACTOR SHALL REMOVE FROM THE SITE ALL REMAINING RUBBISH, IMPLEMENTS, TEMPORARY FACILITIES, AND SURPLUS MATERIALS.
- B. EQUIPMENT ROOMS SHALL AT ALL TIMES BE MAINTAINED "BROOM CLEAN" AND CLEAR OF DEBRIS.
- C. CONTRACTOR SHALL TAKE ALL REASONABLE PRECAUTIONS TO DISCOVER AND LOCATE ANY HAZARDOUS CONDITION.
- 1. IN THE EVENT CONTRACTOR ENCOUNTERS ANY HAZARDOUS CONDITION WHICH HAS NOT BEEN ABATED OR OTHERWISE MITIGATED, CONTRACTOR AND ALL OTHER PERSONS SHALL IMMEDIATELY STOP WORK IN THE AFFECTED AREA AND NOTIFY COMPANY IN WRITING. THE WORK IN THE AFFECTED AREA SHALL NOT BE RESUMED EXCEPT BY WRITTEN NOTIFICATION BY COMPANY.
- 2. CONTRACTOR AGREES TO USE CARE WHILE ON THE SITE AND SHALL NOT TAKE ANY ACTION THAT WILL OR MAY RESULT IN OR CAUSE THE HAZARDOUS CONDITION TO BE FURTHER RELEASED IN THE ENVIRONMENT, OR TO FURTHER EXPOSE INDIVIDUALS TO THE HAZARD.
- D. CONTRACTOR'S ACTIVITIES SHALL BE RESTRICTED TO THE PROJECT LIMITS. SHOULD AREAS OUTSIDE THE PROJECT LIMITS BE AFFECTED BY CONTRACTOR'S ACTIVITIES, CONTRACTOR SHALL IMMEDIATELY RETURN THEM TO ORIGINAL CONDITION.
- E. CONDUCT TESTING AS REQUIRED HEREIN.

3.3 **DELIVERABLES:**

- A. CONTRACTOR SHALL REVIEW, APPROVE, AND SUBMIT TO SPRINT SHOP DRAWINGS, PRODUCT DATA, SAMPLES, AND SIMILAR SUBMITTALS AS REQUIRED HEREINAFTER
- B. PROVIDE DOCUMENTATION INCLUDING, BUT NOT LIMITED TO, THE FOLLOWING. DOCUMENTATION SHALL BE FORWARDED IN ORIGINAL FORMAT AND/OR UPLOADED INTO SMS.
 1. ALL CORRESPONDENCE AND PRELIMINARY CONSTRUCTION REPORTS.
 2. PROJECT PROGRESS REPORTS.
 3. CIVIL CONSTRUCTION START DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 4. ELECTRICAL SERVICE COMPLETION DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 5. LINES AND ANTENNA INSTALL DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 6. POWER INSTALL DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 7. TELCO READY DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 8. PPC (OR SHELTER) INSTALL DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 9. TOWER CONSTRUCTION START DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 10. TOWER CONSTRUCTION COMPLETE DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 11. BTS AND RADIO EQUIPMENT DELIVERED AT SITE DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 12. NETWORK OPERATIONS HANDOFF CHECKLIST (HOC WALK) COMPLETE (UPLOAD FORM IN SMS)
 13. CIVIL CONSTRUCTION COMPLETE DATE (POPULATE FIELD IN SMS AND/OR FORWARD NOTIFICATION).
 14. SITE CONSTRUCTION PROGRESS PHOTOS UNLOADED INTO SMS.

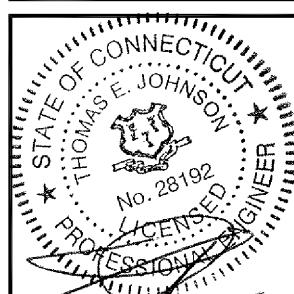

SUBMITTALS			
REV.	DATE	DESCRIPTION	BY
0	12/07/17	ISSUED FOR CONSTRUCTION	JEB/PN

SITE NUMBER: CT52XC053
SITE NAME: WATERBURY NORTH

SITE ADDRESS:
299 SHEFFIELD STREET
WATERBURY, CT 06704

SHEET TITLE OUTLINE SPECIFICATIONS
--

SHEET NUMBER

SP-1

CONTINUE SHEET SP-2

CONTINUED FROM SP-1:

SECTION 01 400 - SUBMITTALS, TESTS, AND INSPECTIONS

PART 1 - GENERAL

1.1 **THE WORK:** THESE STANDARD CONSTRUCTION SPECIFICATIONS IN CONJUNCTION WITH THE OTHER CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

1.2 RELATED DOCUMENTS:

A. THE REQUIREMENTS OF THIS SECTION APPLY TO ALL SECTIONS IN THIS SPECIFICATION.

B. SPRINT "STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES" ARE INCLUDED IN AND MADE A PART OF THESE SPECIFICATIONS HEREWITHE.

1.3 SUBMITTALS:

A. THE WORK IN ALL ASPECTS SHALL COMPLY WITH THE CONSTRUCTION DRAWINGS AND THESE SPECIFICATIONS.

B. SUBMIT THE FOLLOWING TO COMPANY REPRESENTATIVE FOR APPROVAL.

1. CONCRETE MIX-DESIGNS FOR TOWER FOUNDATIONS, ANCHORS PIERS, AND CONCRETE PAVING.
2. CONCRETE BREAK TESTS AS SPECIFIED HEREIN.
3. SPECIAL FINISHES FOR INTERIOR SPACES, IF ANY.
4. ALL EQUIPMENT AND MATERIALS SO IDENTIFIED ON THE CONSTRUCTION DRAWINGS.

C. ALTERNATES: AT THE COMPANY'S REQUEST, ANY ALTERNATIVES TO THE MATERIALS OR METHODS SPECIFIED SHALL BE SUBMITTED TO SPRINT'S CONSTRUCTION MANAGER FOR APPROVAL PRIOR TO BEING SHIPPED TO SITE. SPRINT WILL REVIEW AND APPROVE ONLY THOSE REQUESTS MADE IN WRITING. NO VERBAL APPROVALS WILL BE CONSIDERED. SUBMITTAL FOR APPROVAL SHALL INCLUDE A STATEMENT OF COST REDUCTION PROPOSED FOR USE OF ALTERNATE PRODUCT.

1.4 TESTS AND INSPECTIONS:

A. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL CONSTRUCTION TESTS, INSPECTIONS AND PROJECT DOCUMENTATION.

B. CONTRACTOR SHALL ACCOMPLISH TESTING INCLUDING BUT NOT LIMITED TO THE FOLLOWING:

1. COAX SWEEPS AND FIBER TESTS PER SPRINT TS-0200 CURRENT VERSION ANTENNA LINE ACCEPTANCE STANDARDS.
2. AGL, AZIMUTH AND DOWNTILT USING ELECTRONIC COMMERCIAL MADE-FOR-THE-PURPOSE ANTENNA ALIGNMENT TOOL.
3. CONTRACTOR SHALL BE RESPONSIBLE FOR ANY AND ALL CORRECTIONS TO ANY WORK IDENTIFIED AS UNACCEPTABLE IN SITE INSPECTION ACTIVITIES AND/OR AS A RESULT OF TESTING.

C. REQUIRED CLOSEOUT DOCUMENTATION INCLUDES, BUT IS NOT LIMITED TO THE FOLLOWING:

1. AZIMUTH, DOWNTILT, AGL – UPLOAD REPORT FROM ANTENNA ALIGNMENT TOOL TO SITERRA TASK 465. INSTALLED AZIMUTH, DOWNTILT, AND AGL MUST CONFORM TO THE RF DATA SHEETS. SWEEP AND FIBER TESTS
2. SCANNABLE BARCODE PHOTOGRAPHS OF TOWER TOP AND INACCESSIBLE SERIALIZED EQUIPMENT
3. ALL AVAILABLE JURISDICTIONAL INFORMATION
4. PDF SCAN OF REDLINES PRODUCED IN FIELD
5. ELECTRONIC AS-BUILT DRAWINGS IN AUTOCAD AND PDF FORMATS. ANY FIELD CHANGE MUST BE REFLECTED BY MODIFYING THE PLANS, ELEVATIONS, AND DETAILS IN THE DRAWING SETS. GENERAL NOTES INDICATING MODIFICATIONS WILL NOT BE ACCEPTED. CHANGES SHALL BE HIGHLIGHTED AS "CLOUDS" IDENTIFIED AS THE "AS-BUILT" CONDITION.

6. LIEN WAIVERS
7. FINAL PAYMENT APPLICATION
8. REQUIRED FINAL CONSTRUCTION PHOTOS
9. CONSTRUCTION AND COMMISSIONING CHECKLIST COMPLETE WITH NO DEFICIENT ITEMS
10. ALL POST NTP TASKS INCLUDING DOCUMENT UPLOADS COMPLETED IN SITERRA (SPRINTS DOCUMENT REPOSITORY OF RECORD).

1.5 **COMMISSIONING:** PERFORM ALL COMMISSIONING AS REQUIRED BY APPLICABLE MOPS

1.6 **INTEGRATION:** PERFORM ALL INTEGRATION ACTIVITIES AS REQUIRED BY APPLICABLE MOPS

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 REQUIREMENTS FOR TESTING:

A. THIRD PARTY TESTING AGENCY: WHEN THE USE OF A THIRD PARTY INDEPENDENT TESTING AGENCY IS REQUIRED, THE AGENCY THAT IS SELECTED MUST PERFORM SUCH WORK ON A REGULAR BASIS IN THE STATE WHERE THE PROJECT IS LOCATED AND HAVE A THOROUGH UNDERSTANDING OF LOCAL AVAILABLE MATERIALS, INCLUDING THE SOIL, ROCK, AND GROUNDWATER CONDITIONS.

1. THE THIRD PARTY TESTING AGENCY IS TO BE FAMILIAR WITH THE APPLICABLE REQUIREMENTS FOR THE TESTS TO BE DONE, EQUIPMENT TO BE USED, AND ASSOCIATED HEALTH AND SAFETY ISSUES.
2. EXPERIENCE IN SOILS, CONCRETE, MASONRY, AGGREGATE, AND ASPHALT TESTING USING ASTM, AASHTO, AND OTHER METHODS IS NEEDED.
3. EXPERIENCE IN SOILS, CONCRETE, MASONRY, AGGREGATE, AND ASPHALT TESTING USING ASTM, AASHTO, AND OTHER METHODS IS NEEDED.

3.2 REQUIRED TESTS:

A. CONTRACTOR SHALL ACCOMPLISH TESTING INCLUDING BUT NOT LIMITED TO THE FOLLOWING:

1. CONCRETE CYLINDER BREAK TESTS FOR THE TOWER AND ANCHOR FOUNDATIONS AS SPECIFIED IN SECTION: PORTLAND CEMENT CONCRETE PAVING.
2. ASPHALT ROADWAY COMPACTED THICKNESS, SURFACE SMOOTHNESS, AND COMPACTED DENSITY TESTING AS SPECIFIED IN SECTION: HOT MIX ASPHALT PAVING.
3. FIELD QUALITY CONTROL TESTING AS SPECIFIED IN SECTION: PORTLAND CEMENT CONCRETE PAVING.
4. TESTING REQUIRED UNDER SECTION: AGGREGATE BASE FOR ACCESS ROADS, PADS AND ANCHOR LOCATIONS
5. STRUCTURAL BACKFILL COMPACTION TESTS FOR THE TOWER FOUNDATION.
6. SITE RESISTANCE TO EARTH TESTING PER EXHIBIT: CELL SITE GROUNDING SYSTEM DESIGN.
7. ANTENNA AND COAX SWEEP TESTS PER EXHIBIT: ANTENNA TRANSMISSION LINE ACCEPTANCE STANDARDS.
8. GROUNDING AT ANTENNA MASTS FOR GPS AND ANTENNAS
9. ALL OTHER TESTS REQUIRED BY COMPANY OR JURISDICTION.

3.3 REQUIRED INSPECTIONS:

A. SCHEDULE INSPECTIONS WITH COMPANY REPRESENTATIVE.

B. CONDUCT INSPECTIONS INCLUDING BUT NOT LIMITED TO THE FOLLOWING:

1. GROUNDING SYSTEM INSTALLATION PRIOR TO EARTH CONCEALMENT DOCUMENTED WITH DIGITAL PHOTOGRAPHS BY CONTRACTOR, APPROVED BY A&E OR SPRINT REPRESENTATIVE.
2. FORMING FOR CONCRETE AND REBAR PLACEMENT PRIOR TO POUR DOCUMENTED WITH DIGITAL PHOTOGRAPHS BY CONTRACTOR, APPROVED BY A&E OR SPRINT REPRESENTATIVE.
3. COMPACTION OF BACKFILL MATERIALS; AGGREGATE BASE FOR ROADS, PADS, AND ANCHORS; ASPHALT PAVING; AND SHAFT BACKFILL FOR CONCRETE AND WOOD POLES, BY INDEPENDENT THIRD PARTY AGENCY.
4. PRE- AND POST-CONSTRUCTION ROOFTOP AND STRUCTURAL INSPECTIONS ON EXISTING FACILITIES.
5. TOWER ERECTION SECTION STACKING AND PLATFORM ATTACHMENT DOCUMENTED BY DIGITAL PHOTOGRAPHS BY THIRD PARTY AGENCY.
6. ANTENNA AZIMUTH, DOWN TILT AND PER SUNLIGHT TOOL SUNSIGHT INSTRUMENTS – ANTENNALIGN ALIGNMENT TOOL (AAT)
7. VERIFICATION DOCUMENTED WITH THE ANTENNA CHECKLIST REPORT, BY A&E, SITE DEVELOPMENT REP, OR RF REP.
8. FINAL INSPECTION CHECKLIST AND HANDOFF WALK (HOC). SIGNED FORM SHOWING ACCEPTANCE BY FIELD OPS IS TO BE UPLOADED INTO SMS.
9. COAX SWEEP AND FIBER TESTING DOCUMENTS SUBMITTED VIA SMS FOR RF APPROVAL.
10. SCAN-ABLE BARCODE PHOTOGRAPHS OF TOWER TOP AND INACCESSIBLE SERIALIZED EQUIPMENT
11. ALL AVAILABLE JURISDICTIONAL INFORMATION
12. PDF SCAN OF REDLINES PRODUCED IN FIELD

E. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY AND ALL CORRECTIONS TO ANY WORK IDENTIFIED AS UNACCEPTABLE IN SITE INSPECTION ACTIVITIES AND/OR AS A RESULT OF TESTING.

F. CONSTRUCTION INSPECTIONS AND CORRECTIVE MEASURES SHALL BE DOCUMENTED BY THE CONTRACTOR WITH WRITTEN REPORTS AND PHOTOGRAPHS. PHOTOGRAPHS MUST BE DIGITAL AND OF SUFFICIENT QUALITY TO CLEARLY SHOW THE SITE CONSTRUCTION. PHOTOGRAPHS MUST CLEARLY IDENTIFY THE PHOTOGRAPHED ITEM AND BE LABELED WITH THE SITE CASCADE NUMBER, SITE NAME, DESCRIPTION, AND DATE.

3.4 DELIVERABLES: TEST AND INSPECTION REPORTS AND CLOSEOUT DOCUMENTATION SHALL BE UPLOADED TO THE SMS AND/OR FORWARDED TO SPRINT FOR INCLUSION INTO THE PERMANENT SITE FILES.

A. THE FOLLOWING TEST AND INSPECTION REPORTS SHALL BE PROVIDED AS APPLICABLE.

1. CONCRETE MIX AND CYLINDER BREAK REPORTS.
2. STRUCTURAL BACKFILL COMPACTION REPORTS.
3. SITE RESISTANCE TO EARTH TEST.
4. ANTENNA AZIMUTH AND DOWN TILT VERIFICATION
5. TOWER ERECTION INSPECTIONS AND MEASUREMENTS DOCUMENTING TOWER INSTALLED PER SUPPLIER'S REQUIREMENTS AND THE APPLICABLE SECTIONS HEREIN.
6. COAX CABLE SWEEP TESTS PER COMPANY'S "ANTENNA LINE ACCEPTANCE STANDARDS".

B. REQUIRED CLOSEOUT DOCUMENTATION INCLUDES THE FOLLOWING;

1. TEST WELLS AND TRENCHES: PHOTOGRAPHS OF ALL TEST WELLS; PHOTOGRAPHS SHOWING ALL OPEN EXCAVATIONS AND TRENCHING PRIOR TO BACKFILLING SHOWING A TAPE MEASURE VISIBLE IN THE EXCAVATIONS INDICATING DEPTH.
2. CONDUITS, CONDUCTORS AND GROUNDRING: PHOTOGRAPHS SHOWING TYPICAL INSTALLATION OF CONDUCTORS AND CONNECTORS; PHOTOGRAPHS SHOWING TYPICAL BEND RADIUS OF INSTALLED GROUND WIRES AND GROUND ROD SPACING;
3. CONCRETE FORMS AND REINFORCING: CONCRETE FORMING AT TOWER AND EQUIPMENT/SHELTER PAD/FOUNDATIONS – PHOTOGRAPHS SHOWING ALL REINFORCING STEEL, UTILITY AND CONDUIT STUB OUTS; PHOTOGRAPHS SHOWING CONCRETE POUR OF SHELTER SLAB/FOUNDATION, TOWER FOUNDATION AND GUY ANCHORS WITH VIBRATOR IN USE; PHOTOGRAPHS SHOWING EACH ANCHOR ON GUYED TOWERS, BEFORE CONCRETE POUR.
4. TOWER, ANTENNAS AND MAINLINE: INSPECTION AND PHOTOGRAPHS OF SECTION STACKING; INSPECTION AND PHOTOGRAPHS OF PLATFORM COMPONENT ATTACHMENT POINTS; PHOTOGRAPHS OF TOWER TOP GROUNDRING; PHOTOS OF TOWER COAX LINE COLOR CODING AT THE TOP AND AT GROUND LEVEL; INSPECTION AND PHOTOGRAPHS OF OPERATIONAL OF TOWER LIGHTING, AND PLACEMENT OF FAA REGISTRATION SIGN; PHOTOGRAPHS SHOWING ADDITIONAL GROUNDRING POINTS FOR TOWERS GREATER THAN 200 FEET.; PHOTOS OF ANTENNA GROUND BAR, EQUIPMENT GROUND BAR, AND MASTER GROUND BAR; PHOTOS OF GPS ANTENNA(S); PHOTOS OF EACH SECTOR OF ANTENNAS; ONE PHOTOGRAPH LOOKING AT THE SECTOR AND ONE FROM BEHIND SHOWING THE PROJECTED COVERAGE AREA; PHOTOS OF COAX WEATHERPROOFING – TOP AND BOTTOM; PHOTOS OF COAX GROUNDRING – TOP AND BOTTOM; PHOTOS OF ANTENNA AND MAST GROUNDRING; PHOTOS OF COAX CABLE ENTRY INTO SHELTER; PHOTOS OF PLATFORM MECHANICAL CONNECTIONS TO TOWER/MONPOLE.

5. ROOF TOPS: PRE-CONSTRUCTION AND POST-CONSTRUCTION VISUAL INSPECTION AND PHOTOGRAPHS OF THE ROOF AND INTERIOR TO DETERMINE AND DOCUMENT CONDITIONS; ROOF TOP CONSTRUCTION INSPECTIONS AS REQUIRED BY THE JURISDICTION; PHOTOGRAPHS OF CABLE TRAY AND/OR ICE BRIDGE; PHOTOGRAPHS OF DOGHOUSE/CABLE EXIT FROM ROOF;

6. SITE LAYOUT – PHOTOGRAPHS OF THE OVERALL COMPOUND, INCLUDING EQUIPMENT PLATFORM FROM ALL FOUR CORNERS.

7. FINISHED UTILITIES: CLOSE-UP PHOTOGRAPHS OF THE PPC BREAKER PANEL; CLOSE-UP PHOTOGRAPH OF THE INSIDE OF THE TELCO PANEL AND NIU; CLOSE-UP PHOTOGRAPH OF THE POWER METER AND DISCONNECT; PHOTOS OF POWER AND TELCO ENTRANCE TO COMPANY ENCLOSURE; PHOTOGRAPHS AT METER BOX AND/OR FACILITY DISTRIBUTION PANEL.

8. REQUIRED MATERIALS CERTIFICATIONS: CONCRETE MIX DESIGNS; MILL CERTIFICATION FOR ALL REINFORCING AND STRUCTURAL STEEL; AND ASPHALT PAVING MIX DESIGN.

9. ANY AND ALL SUBMITTALS BY THE JURISDICTION OR COMPANY.

SECTION 01 500 - PROJECT REPORTING

PART 1 - GENERAL

1.1 **THE WORK:** THESE STANDARD CONSTRUCTION SPECIFICATIONS IN CONJUNCTION WITH THE OTHER CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

1.2 RELATED DOCUMENTS:

- A. THE REQUIREMENTS OF THIS SECTION APPLY TO ALL SECTIONS IN THIS SPECIFICATION.
- B. SPRINT "STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES" ARE INCLUDED IN AND MADE A PART OF THESE SPECIFICATIONS HEREWITHE.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 WEEKLY REPORTS:

- A. CONTRACTOR SHALL PROVIDE SPRINT WITH WEEKLY REPORTS SHOWING PROJECT STATUS. THIS STATUS REPORT FORMAT WILL BE PROVIDED TO THE CONTRACTOR BY SPRINT. THE REPORT WILL CONTAIN SITE ID NUMBER, THE MILESTONES FOR EACH SITE, INCLUDING THE BASELINE DATE, ESTIMATED COMPLETION DATE AND ACTUAL COMPLETION DATE.

B. REPORT INFORMATION WILL BE TRANSMITTED TO SPRINT VIA ELECTRONIC MEANS AS REQUIRED. THIS INFORMATION WILL PROVIDE A BASIS FOR PROGRESS MONITORING AND PAYMENT.

3.2 PROJECT CONFERENCE CALLS:

A. SPRINT MAY HOLD WEEKLY PROJECT CONFERENCE CALLS. CONTRACTOR WILL BE REQUIRED TO COMMUNICATE SITE STATUS, MILESTONE COMPLETIONS AND UPCOMING MILESTONE PROJECTIONS, AND ANSWER ANY OTHER SITE STATUS QUESTIONS AS NECESSARY.

3.3 PROJECT TRACKING IN SMS:

A. CONTRACTOR SHALL PROVIDE SCHEDULE UPDATES AND PROJECTIONS IN THE SMS SYSTEM ON A WEEKLY BASIS.

3.4 ADDITIONAL REPORTING:

A. ADDITIONAL OR ALTERNATE REPORTING REQUIREMENTS MAY BE ADDED TO THE REPORT AS DETERMINED TO BE REASONABLY NECESSARY BY COMPANY.

3.5 PROJECT PHOTOGRAPHS:

A. FILE DIGITAL PHOTOGRAPHS OF COMPLETED SITE IN JPEG FORMAT IN THE SMS PHOTO LIBRARY FOR THE RESPECTIVE SITE. PHOTOGRAPHS SHALL BE CLEARLY LABELED WITH SITE NUMBER, NAME AND DESCRIPTION, AND SHALL INCLUDE AT A MINIMUM THE FOLLOWING AS APPLICABLE:

1. SHELTER AND TOWER OVERVIEW.
2. TOWER FOUNDATION(S) – FORMS AND STEEL BEFORE POUR (EACH ANCHOR ON GUYED TOWERS).
3. TOWER FOUNDATION(S) POUR WITH VIBRATOR IN USE (EACH ANCHOR ON GUYED TOWERS).
4. TOWER STEEL AS BEING INSTALLED INTO HOLE (SHOW ANCHOR STEEL ON GUYED TOWERS).
5. PHOTOS OF TOWER SECTION STACKING.
6. CONCRETE TESTING / SAMPLES.
7. PLACING OF ANCHOR BOLTS IN TOWER FOUNDATION.
8. BUILDING/WATER TANK FROM ROAD FOR TENANT IMPROVEMENTS OR COMMENTS.
9. SHELTER FOUNDATION--FORMS AND STEEL BEFORE POURING.
10. SHELTER FOUNDATION POUR WITH VIBRATOR IN USE.
11. COAX CABLE ENTRY INTO SHELTER.
12. PLATFORM MECHANICAL CONNECTIONS TO TOWER/MONPOLE.
13. ROOFTOP PRE AND POST CONSTRUCTION PHOTOS TO INCLUDE PENETRATIONS AND INTERIOR CEILING.

14. PHOTOS OF TOWER TOP COAX LINE COLOR CODING AND COLOR CODING AT GROUND LEVEL.

15. PHOTOS OF ALL APPROPRIATE COMPANY OR REGULATORY SIGNAGE.

16. PHOTOS OF EQUIPMENT BOLT DOWN INSIDE SHELTER.

17. POWER AND TELCO ENTRANCE TO COMPANY ENCLOSURE AND POWER AND TELCO SUPPLY LOCATIONS INCLUDING METER/DISCONNECT.

18. ELECTRICAL TRENCH(S) WITH ELECTRICAL / CONDUIT BEFORE BACKFILL.

19. ELECTRICAL TRENCH(S) WITH FOIL-BACKED TAPE BEFORE FURTHER BACKFILL.

20. TELCO TRENCH WITH TELEPHONE / CONDUIT BEFORE BACKFILL.

21. TELCO TRENCH WITH FOIL-BACKED TAPE BEFORE FURTHER BACKFILL.

22. SHELTER GROUND-RING TRENCH WITH GROUND-WIRE BEFORE BACKFILL (SHOW ALL CAD WELDS AND BEND RADII).

23. TOWER GROUND-RING TRENCH WITH GROUND-WIRE BEFORE BACKFILL (SHOW ALL CAD WELDS AND BEND RADII).

24. FENCE GROUND-RING TRENCH WITH GROUND-WIRE BEFORE BACKFILL (SHOW ALL CAD WELDS AND BEND RADII).

25. ALL BTS GROUND CONNECTIONS.

26. ALL GROUND TEST WELLS.

27. ANTENNA GROUND BAR AND EQUIPMENT GROUND BAR.

28. ADDITIONAL GROUNDRING POINTS ON TOWERS ABOVE 200'.

29. HVAC UNITS INCLUDING CONDENSERS ON SPLIT SYSTEMS.

30. GPS ANTENNAS.

31. CABLE TRAY AND/OR WAVEGUIDE BRIDGE.

32. DOGHOUSE/CABLE EXIT FROM ROOF.

33. EACH SECTOR OF ANTENNAS; ONE PHOTOGRAPH LOOKING AT THE SECTOR AND ONE FROM BEHIND SHOWING THE PROJECTED COVERAGE AREA.

34. MASTER BUS BAR.

35. TELCO BOARD AND NIU.

36. ELECTRICAL DISTRIBUTION WALL.

37. CABLE ENTRY WITH SURGE SUPPRESSION.

38. ENTRANCE TO EQUIPMENT ROOM.

39. COAX WEATHERPROOFING-TOP AND BOTTOM OF TOWER.

40. COAX GROUNDRING –TOP AND BOTTOM OF TOWER.

41. ANTENNA AND MAST GROUNDRING.

42. LANDSCAPING – WHERE APPLICABLE.

3.6 FINAL PROJECT ACCEPTANCE: COMPLETE ALL REQUIRED REPORTING TASKS PER CONTRACT, CONTRACT DOCUMENTS OR THE SPRINT INTEGRATED CONSTRUCTION STANDARDS FOR WIRELESS SITES AND UPLOAD INTO SITERRA.

SECTION 07 500 - ROOF CUTTING, PATCHING AND REPAIR

SUMMARY:

CONTINUED FROM SP-2:**MATERIALS:**

- A. MANUFACTURERS: BENJAMIN MOORE, ICI DEVOE COATINGS, PPG, SHERWIN WILLIAMS OR APPROVED EQUAL. PROVIDE PREMIUM GRADE, PROFESSIONAL-QUALITY PRODUCTS FOR COATING SYSTEMS.

PAINT SCHEDULE:

- A. EXTERIOR ANTENNAE AND ANTENNA MOUNTING HARDWARE: ONE COAT OF PRIMER AND TWO FINISH COATS. PAINT FOR ANTENNAE SHALL BE NON-METALLIC BASED AND CONTAIN NO METALLIC PARTICLES. PROVIDE COLORS AND PATTERNS AS REQUIRED TO MASK APPEARANCE OF ANTENNAE ON ADJACENT BUILDING SURFACES AND AS ACCEPTABLE TO THE OWNER. REFER TO ANTENNA MANUFACTURER'S INSTRUCTIONS WHENEVER POSSIBLE.

- B. ROOF TOP CONSTRUCTION: TOUCH UP - PREPARE SURFACES TO BE REPAIRED. FOLLOW INDUSTRY STANDARDS AND REQUIREMENTS OF OWNER TO MATCH EXISTING COATING AND FINISH.

PAINTING APPLICATION:

1. INSPECT SURFACES, REPORT UNSATISFACTORY CONDITIONS IN WRITING; BEGINNING WORK MEANS ACCEPTANCE OF SUBSTRATE.
2. COMPLY WITH MANUFACTURER'S INSTRUCTIONS AND RECOMMENDATIONS FOR PREPARATION, PRIMING AND COATING WORK. COORDINATE WITH WORK OF OTHER SECTIONS.
3. MATCH APPROVED MOCK-UPS FOR COLOR, TEXTURE, AND PATTERN. RE-COAT OR REMOVE AND REPLACE WORK WHICH DOES NOT MATCH OR SHOWS LOSS OF ADHESION.
4. CLEAN UP, TOUCH UP AND PROTECT WORK.

TOUCHUP PAINTING:

1. GALVANIZING DAMAGE AND ALL BOLTS AND NUTS SHALL BE TOUCHED UP AFTER TOWER ERECTION WITH "GALVANOX," "DRY GALV," OR "ZINC-IT."
2. FIELD TOUCHUP PAINT SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURER'S WRITTEN INSTRUCTIONS.
3. ALL METAL COMPONENTS SHALL BE HANDLED WITH CARE TO PREVENT DAMAGE TO THE COMPONENTS, THEIR PRESERVATIVE TREATMENT, OR THEIR PROTECTIVE COATINGS.

SECTION 11 700 - ANTENNA ASSEMBLY, REMOTE RADIO HEADS AND CABLE**INSTALLATION****SUMMARY:**

THIS SECTION SPECIFIES INSTALLATION OF ANTENNAS, RRH'S, AND CABLE EQUIPMENT, INSTALLATION, AND TESTING OF COAXIAL FIBER CABLE.

ANTENNAS AND RRH'S:

THE NUMBER AND TYPE OF ANTENNAS AND RRH'S TO BE INSTALLED IS DETAILED ON THE CONSTRUCTION DRAWINGS.

HYBRID CABLE:

HYBRID CABLE WILL BE DC/FIBER AND FURNISHED FOR INSTALLATION AT EACH SITE. CABLE SHALL BE INSTALLED PER THE CONSTRUCTION DRAWINGS AND THE APPLICABLE MANUFACTURER'S REQUIREMENTS.

JUMPERS AND CONNECTORS:

FURNISH AND INSTALL 1/2" COAX JUMPER CABLES BETWEEN THE RRH'S AND ANTENNAS. JUMPERS SHALL BE TYPE LDF 4, FLC 12-50, CR 540, OR FXL 540. SUPER-FLEX CABLES ARE NOT ACCEPTABLE. JUMPERS BETWEEN THE RRH'S AND ANTENNAS OR TOWER TOP AMPLIFIERS SHALL CONSIST OF 1/2 INCH FOAM DIELECTRIC, OUTDOOR RATED COAXIAL CABLE. DO NOT USE SUPERFLEX OUTDOORS. JUMPERS SHALL BE FACTORY FABRICATED IN APPROPRIATE LENGTHS WITH A MAXIMUM OF 4 FEET EXCESS PER JUMPER AND HAVE CONNECTORS AT EACH END, MANUFACTURED BY SUPPLIER. IF JUMPERS ARE FIELD FABRICATED, FOLLOW MANUFACTURER'S REQUIREMENTS FOR INSTALLATION OF CONNECTORS

REMOTE ELECTRICAL TILT (RET) CABLES:**MISCELLANEOUS:**

INSTALL SPLITTERS, COMBINERS, FILTERS PER RF DATA SHEET, FURNISHED BY SPRINT.

ANTENNA INSTALLATION:

THE CONTRACTOR SHALL ASSEMBLE ALL ANTENNAS ONSITE IN ACCORDANCE WITH THE INSTRUCTIONS SUPPLIED BY THE MANUFACTURER. ANTENNA HEIGHT, AZIMUTH, AND FEED ORIENTATION INFORMATION SHALL BE A DESIGNATED ON THE CONSTRUCTION DRAWINGS.

- A. THE CONTRACTOR SHALL POSITION THE ANTENNA ON TOWER PIPE MOUNTS SO THAT THE BOTTOM STRUT IS LEVEL. THE PIPE MOUNTS SHALL BE PLUMB TO WITHIN 1 DEGREE.

- B. ANTENNA MOUNTING REQUIREMENTS: PROVIDE ANTENNA MOUNTING HARDWARE AS INDICATED ON THE DRAWINGS.

HYBRID CABLES INSTALLATION:

- A. THE CONTRACTOR SHALL ROUTE, TEST, AND INSTALL ALL CABLES AS INDICATED ON THE CONSTRUCTION DRAWINGS AND IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.

- B. THE INSTALLED RADIUS OF THE CABLES SHALL NOT BE LESS THAN THE MANUFACTURER'S SPECIFICATIONS FOR BENDING RADII.

- C. EXTREME CARE SHALL BE TAKEN TO AVOID DAMAGE TO THE CABLES DURING HANDLING AND INSTALLATION.

1. FASTENING MAIN HYBRID CABLES: ALL CABLES SHALL BE PERMANENTLY FASTENED TO THE COAX LADDER AT 4'-0" OC USING NON-MAGNETIC STAINLESS STEEL CLIPS.

2. FASTENING INDIVIDUAL FIBER AND DC CABLES ABOVE BREAKOUT ENCLOSURE (MEDUSA), WITHIN THE MMBTS CABINET AND ANY INTERMEDIATE DISTRIBUTION BOXES:

- a. FIBER: SUPPORT FIBER BUNDLES USING 1/2" VELCRO STRAPS OF THE REQUIRED LENGTH @ 18° OC. STRAPS SHALL BE UV, OIL AND WATER RESISTANT AND SUITABLE FOR INDUSTRIAL INSTALLATIONS AS MANUFACTURED BY TEXTOL OR APPROVED EQUAL.

- b. DC: SUPPORT DC BUNDLES WITH ZIP TIES OF THE ADEQUATE LENGTH. ZIP TIES TO BE UV STABILIZED, BLACK NYLON, WITH TENSILE STRENGTH AT 12,000 PSI AS MANUFACTURED BY NELCO PRODUCTS OR EQUAL.

3. FASTENING JUMPERS: SECURE JUMPERS TO THE SIDE ARMS OR HEAD FRAMES USING STAINLESS STEEL TIE WRAPS OR STAINLESS STEEL BUTTERFLY CLIPS.

4. CABLE INSTALLATION:

- a. INSPECT CABLE PRIOR TO USE FOR SHIPPING DAMAGE, NOTIFY THE CONSTRUCTION MANAGER.

- b. CABLE ROUTING: CABLE INSTALLATION SHALL BE PLANNED TO ENSURE THAT THE LINES WILL BE PROPERLY ROUTED IN THE CABLE ENVELOPE AS INDICATED ON THE DRAWINGS. AVOID TWISTING AND CROSSOVERS.

- c. HOST CABLE USING PROPER HOISTING GRIPS. DO NOT EXCEED MANUFACTURE'S RECOMMENDED MAXIMUM BEND RADIUS.

5. GROUNDING OF TRANSMISSION LINES: ALL TRANSMISSION LINES SHALL BE GROUNDED AS INDICATED ON DRAWINGS.

6. HYBRID CABLE COLOR CODING: ALL COLOR CODING SHALL BE AS REQUIRED PER SPRINT TS 0200 CURRENT VERSION.

7. HYBRID CABLE LABELING: INDIVIDUAL HYBRID AND DC BUNDLES SHALL BE LABELED ALPHA-NUMERICALLY ACCORDING TO SPRINT CELL SITE ENGINEERING NOTICE-EN 2012-001, REV 1

WEATHERPROOFING EXTERIOR CONNECTORS AND HYBRID CABLE GROUND KITS:

- A. ALL FIBER & COAX CONNECTORS AND GROUND KITS SHALL BE WEATHERPROOFED.

- B. WEATHERPROOFED USING ONE OF THE FOLLOWING METHODS. ALL INSTALLATIONS MUST BE DONE IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND INDUSTRY BEST PRACTICES.

1. COLD SHRINK: ENCOMPASS CONNECTOR IN COLD SHRINK TUBING AND PROVIDE A DOUBLE WRAP OF 2" ELECTRICAL TAPE EXTENDING 2" BEYOND TUBING. PROVIDE 3M COLD SHRINK CXS SERIES OR EQUAL.

2. SELF-AMALGAMATING TAPE: CLEAN SURFACES. APPLY A DOUBLE WRAP OF SELF-AMALGAMATING TAPE 2" BEYOND CONNECTOR. APPLY A SECOND WRAP OF SELF-AMALGAMATING TAPE IN OPPOSITE DIRECTION. APPLY DOUBLE WRAP OF 2" WIDE ELECTRICAL TAPE EXTENDING 2" BEYOND THE SELF-AMALGAMATING TAPE.

3. 3M SLIM LOCK CLOSURE 716: SUBSTITUTIONS WILL NOT BE ALLOWED.

4. OPEN FLAME ON JOB SITE IS NOT ACCEPTABLE

SECTION 11 800 - INSTALLATION OF MULTIMODAL BASE STATIONS (MMBTS) AND RELATED EQUIPMENT**SUMMARY:**

- A. THIS SECTION SPECIFIES MMBTS CABINETS, POWER CABINETS, AND INTERNAL EQUIPMENT INCLUDING BY NOT LIMITED TO RECTIFIERS, POWER DISTRIBUTION UNITS, BASE BAND UNITS, SURGE ARRESTORS, BATTERIES, AND SIMILAR EQUIPMENT FURNISHED BY THE COMPANY FOR INSTALLATION BY THE CONTRACTOR (OFCI).

- B. CONTRACTOR SHALL PROVIDE AND INSTALL ALL MISCELLANEOUS MATERIALS AND PROVIDE ALL LABOR REQUIRED FOR INSTALLATION EQUIPMENT IN EXISTING CABINET OR NEW CABINET AS SHOWN ON DRAWINGS AND AS REQUIRE BY THE APPLICABLE INSTALLATION MOPS.

- C. COMPLY WITH MANUFACTURERS INSTALLATION AND START-UP REQUIREMENTS

DC CIRCUIT BREAKER LABELING

- A. LABEL CIRCUIT BREAKERS ACCORDING TO SPRINT CELL SITE ENGINEERING NOTICE - EN 2012-001, REV 1.

SECTION 11 800 - INSTALLATION OF MULTIMODAL BASE TRANSCEIVER STATIONS (MMBTS) AND RELATED EQUIPMENT**SUMMARY:**

- A. THIS SECTION SPECIFIES MMBTS CABINETS, POWER CABINETS, AND INTERNAL EQUIPMENT INCLUDING BY NOT LIMITED TO RECTIFIERS, POWER DISTRIBUTION UNITS, BASE BAND UNITS, SURGE ARRESTORS, BATTERIES, AND SIMILAR EQUIPMENT FURNISHED BY THE COMPANY FOR INSTALLATION BY THE CONTRACTOR (OFCI).

- B. CONTRACTOR SHALL PROVIDE AND INSTALL ALL MISCELLANEOUS MATERIALS AND PROVIDE ALL LABOR REQUIRED FOR INSTALLATION EQUIPMENT IN EXISTING CABINET OR NEW CABINET AS SHOWN ON DRAWINGS AND AS REQUIRE BY THE APPLICABLE INSTALLATION MOPS.

- C. COMPLY WITH MANUFACTURERS INSTALLATION AND START-UP REQUIREMENTS

SUPPORTING DEVICES:

- A. MANUFACTURED STRUCTURAL SUPPORT MATERIALS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS BY THE FOLLOWING:

1. ALLIED TUBE AND CONDUIT
2. B-LINE SYSTEM
3. UNISTRUT DIVERSIFIED PRODUCTS
4. THOMAS & BETTS

- B. FASTENERS: TYPES, MATERIALS, AND CONSTRUCTION FEATURES AS FOLLOWS:

1. EXPANSION ANCHORS: CARBON STEEL WEDGE OR SLEEVE TYPE.
2. POWER-DRIVEN THREADED STUDS: HEAT-TREATED STEEL, DESIGNED SPECIFICALLY FOR THE INTENDED SERVICE.

3. FASTEN BY MEANS OF WOOD SCREWS ON WOOD.

4. TOGGLE BOLTS ON HOLLOW MASONRY UNITS.

5. CONCRETE INSERTS OR EXPANSION BOLTS ON CONCRETE OR SOLID MASONRY.

6. MACHINE SCREWS, WELDED THREADED STUDS, OR SPRING-TENSION CLAMPS ON STEEL.

7. EXPLOSIVE DEVICES FOR ATTACHING HANGERS TO STRUCTURE SHALL NOT BE PERMITTED.

8. DO NOT WELD CONDUIT, PIPE STRAPS, OR ITEMS OTHER THAN THREADED STUDS TO STEEL STRUCTURES.

9. IN PARTITIONS OF LIGHT STEEL CONSTRUCTION, USE SHEET METAL SCREWS.

SUPPORTING DEVICES:

- A. INSTALL SUPPORTING DEVICES TO FASTEN ELECTRICAL COMPONENTS SECURELY AND PERMANENTLY IN ACCORDANCE WITH NEC.

- B. COORDINATE WITH THE BUILDING STRUCTURAL SYSTEM AND WITH OTHER TRADES.

- C. UNLESS OTHERWISE INDICATED ON THE DRAWINGS, FASTEN ELECTRICAL ITEMS AND THEIR SUPPORTING HARDWARE SECURELY TO THE STRUCTURE IN ACCORDANCE WITH THE FOLLOWING:

- D. ENSURE THAT THE LOAD APPLIED BY ANY FASTENER DOES NOT EXCEED 25 PERCENT OF THE PROOF TEST LOAD.

- E. USE VIBRATION AND SHOCK-RESISTANT FASTENERS FOR ATTACHMENTS TO CONCRETE SLABS.

ELECTRICAL IDENTIFICATION:

- A. UPDATE AND PROVIDE TYPED CIRCUIT BREAKER SCHEDULES IN THE MOUNTING BRACKET, INSIDE DOORS OF AC PANEL BOARDS WITH ANY CHANGES MADE TO THE AC SYSTEM.

- B. BRANCH CIRCUITS FEEDING AVIATION OBSTRUCTION LIGHTING EQUIPMENT SHALL BE CLEARLY IDENTIFIED AS SUCH AT THE BRANCH CIRCUIT PANELBOARD.

- C. HOST CABLE USING PROPER HOISTING GRIPS. DO NOT EXCEED MANUFACTURE'S RECOMMENDED MAXIMUM BEND RADIUS.

SECTION 26 200 - ELECTRICAL MATERIALS AND EQUIPMENT**CONDUIT:**

- A. RIGID GALVANIZED STEEL (RGS) CONDUIT SHALL BE USED FOR EXTERIOR LOCATIONS ABOVE GROUND AND IN UNFINISHED INTERIOR LOCATIONS AND FOR ENCASED RUNS IN CONCRETE. RIGID CONDUIT AND FITTINGS SHALL BE STEEL, COATED WITH ZINC EXTERIOR AND INTERIOR BY THE HOT DIP GALVANIZING PROCESS. CONDUIT SHALL BE PRODUCED TO ANSI SPECIFICATIONS C80.1, FEDERAL SPECIFICATION WW-C-581 AND SHALL BE LISTED WITH THE UNDERWRITER'S LABORATORIES. FITTINGS SHALL BE THREADED - SET SCREW OR COMPRESSION FITTINGS WILL NOT BE ACCEPTABLE. RGS CONDUITS SHALL BE MANUFACTURED BY ALLIED, REPUBLIC OR WHEATLAND.

- B. UNDERGROUND CONDUIT IN CONCRETE SHALL BE POLYVINYLCHLORIDE (PVC) SUITABLE FOR DIRECT BURIAL AS APPLICABLE. JOINTS SHALL BE BELLED, AND FLUSH SOLVENT WELDED IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS. CONDUIT SHALL BE CARLON ELECTRICAL PRODUCTS OR APPROVED EQUAL.

- C. TRANSITIONS BETWEEN PVC AND RIGID (RGS) SHALL BE MADE WITH PVC COATED METALLIC LONG SWEEP RADIUS ELBOWS.

- D. EMT OR RIGID GALVANIZED STEEL CONDUIT MAY BE USED IN FINISHED SPACES CONCEALED IN WALLS AND CEILINGS. EMT SHALL BE MILD STEEL, ELECTRICALLY WELDED, ELECTRO-GALVANIZED OR HOT-DIPPED GALVANIZED AND PRODUCED TO ANSI SPECIFICATION C80.3, FEDERAL SPECIFICATION WW-C-563, AND SHALL BE UL LISTED. EMT SHALL BE MANUFACTURED BY ALLIED, REPUBLIC OR WHEATLAND, OR APPROVED EQUAL. FITTINGS SHALL BE METALLIC COMPRESSION. SET SCREW CONNECTIONS SHALL NOT BE ACCEPTABLE.

- E. LIQUID TIGHT FLEXIBLE METALLIC CONDUIT SHALL BE USED FOR FINAL CONNECTION TO EQUIPMENT. FITTINGS SHALL BE METALLIC GLAND TYPE COMPRESSION FITTINGS, MAINTAINING THE INTEGRITY OF CONDUIT SYSTEM. SET SCREW CONNECTIONS SHALL NOT BE ACCEPTABLE. MAXIMUM LENGTH OF FLEXIBLE CONDUIT SHALL NOT EXCEED 6-FEET. LFMC SHALL BE PROTECTED AND SUPPORTED AS REQUIRE BY NEC. MANUFACTURERS OF FLEXIBLE CONDUITS SHALL BE CAROL, ANACONDA METAL HOSE OR UNIVERSAL METAL HOSE, OR APPROVED EQUAL.

- F. MINIMUM SIZE CONDUIT SHALL BE 3/4 INCH (21MM).

HUBS AND BOXES:

- A. AT ENTRANCES TO CABINETS OR OTHER EQUIPMENT NOT HAVING INTEGRAL THREADED HUBS, PROVIDE METALLIC THREADED HUBS OF THE SIZE AND CONFIGURATION REQUIRED. HUB SHALL INCLUDE LOCKNUT AND NEOPRENE O-RING SEAL. PROVIDE IMPACT RESISTANT 105 DEGREE C PLASTIC BUSHINGS TO PROTECT CABLE INSULATION.

- B. CABLE TERMINATION FITTINGS FOR CONDUIT

1. CABLE TERMINATORS FOR RGS CONDUITS SHALL BE TYPE CRC BY O-Z/GEDNEY OR EQUAL.
2. CABLE TERMINATORS FOR LFMC SHALL BE ETCO - CL2075; OR MADE FOR THE PURPOSE PRODUCTS BY ROXTEC.

- C. EXTERIOR PULL BOXES AND PULL BOXES IN INTERIOR INDUSTRIAL AREAS SHALL BE PLATED CAST ALLOY, HEAVY DUTY, WEATHERPROOF, DUST PROOF, WITH GASKET, PLATED IRON ALLOY COVER AND STAINLESS STEEL COVER SCREWS, CROUSE-HINDS WAB SERIES OR EQUAL.


- D. CONDUIT OUTLET BODIES SHALL BE PLATED CAST ALLOY WITH SIMILAR GASKETED COVERS. OUTLET BODIES SHALL BE OF THE CONFIGURATION AND SIZE SUITABLE FOR THE APPLICATION. PROVIDE CROUSE-HINDS FORM 8 OR EQUAL.


- E. MANUFACTURER FOR BOXES AND COVERS SHALL BE HOFFMAN, SQUARE "D", CROUSE-HINDS, COOPER, ADALET, APPLETON, O-Z GEDNEY, RACO, OR APPROVED EQUAL.

SUPPLEMENTAL GROUNDING SYSTEM

- A. FURNISH AND INSTALL A SUPPLEMENTAL GROUNDING SYSTEM AS INDICATED ON THE DRAWINGS. SUPPORT SYSTEM WITH NON-MAGNETIC STAINLESS STEEL CLIPS WITH RUBBER GROMMETS. GROUNDING CONNECTORS SHALL BE TINNED COPPER WIRE, SIZES AS INDICATED ON THE DRAWINGS. PROVIDE STRANDED OR SOLID BARE OR INSULATED CONDUCTORS AS INDICATED.

- B. SUPPLEMENTAL GROUNDING SYSTEM: ALL CONNECTIONS TO BE MADE WITH CAD WELDS, EXCEPT AT EQUIPMENT USE LUGS

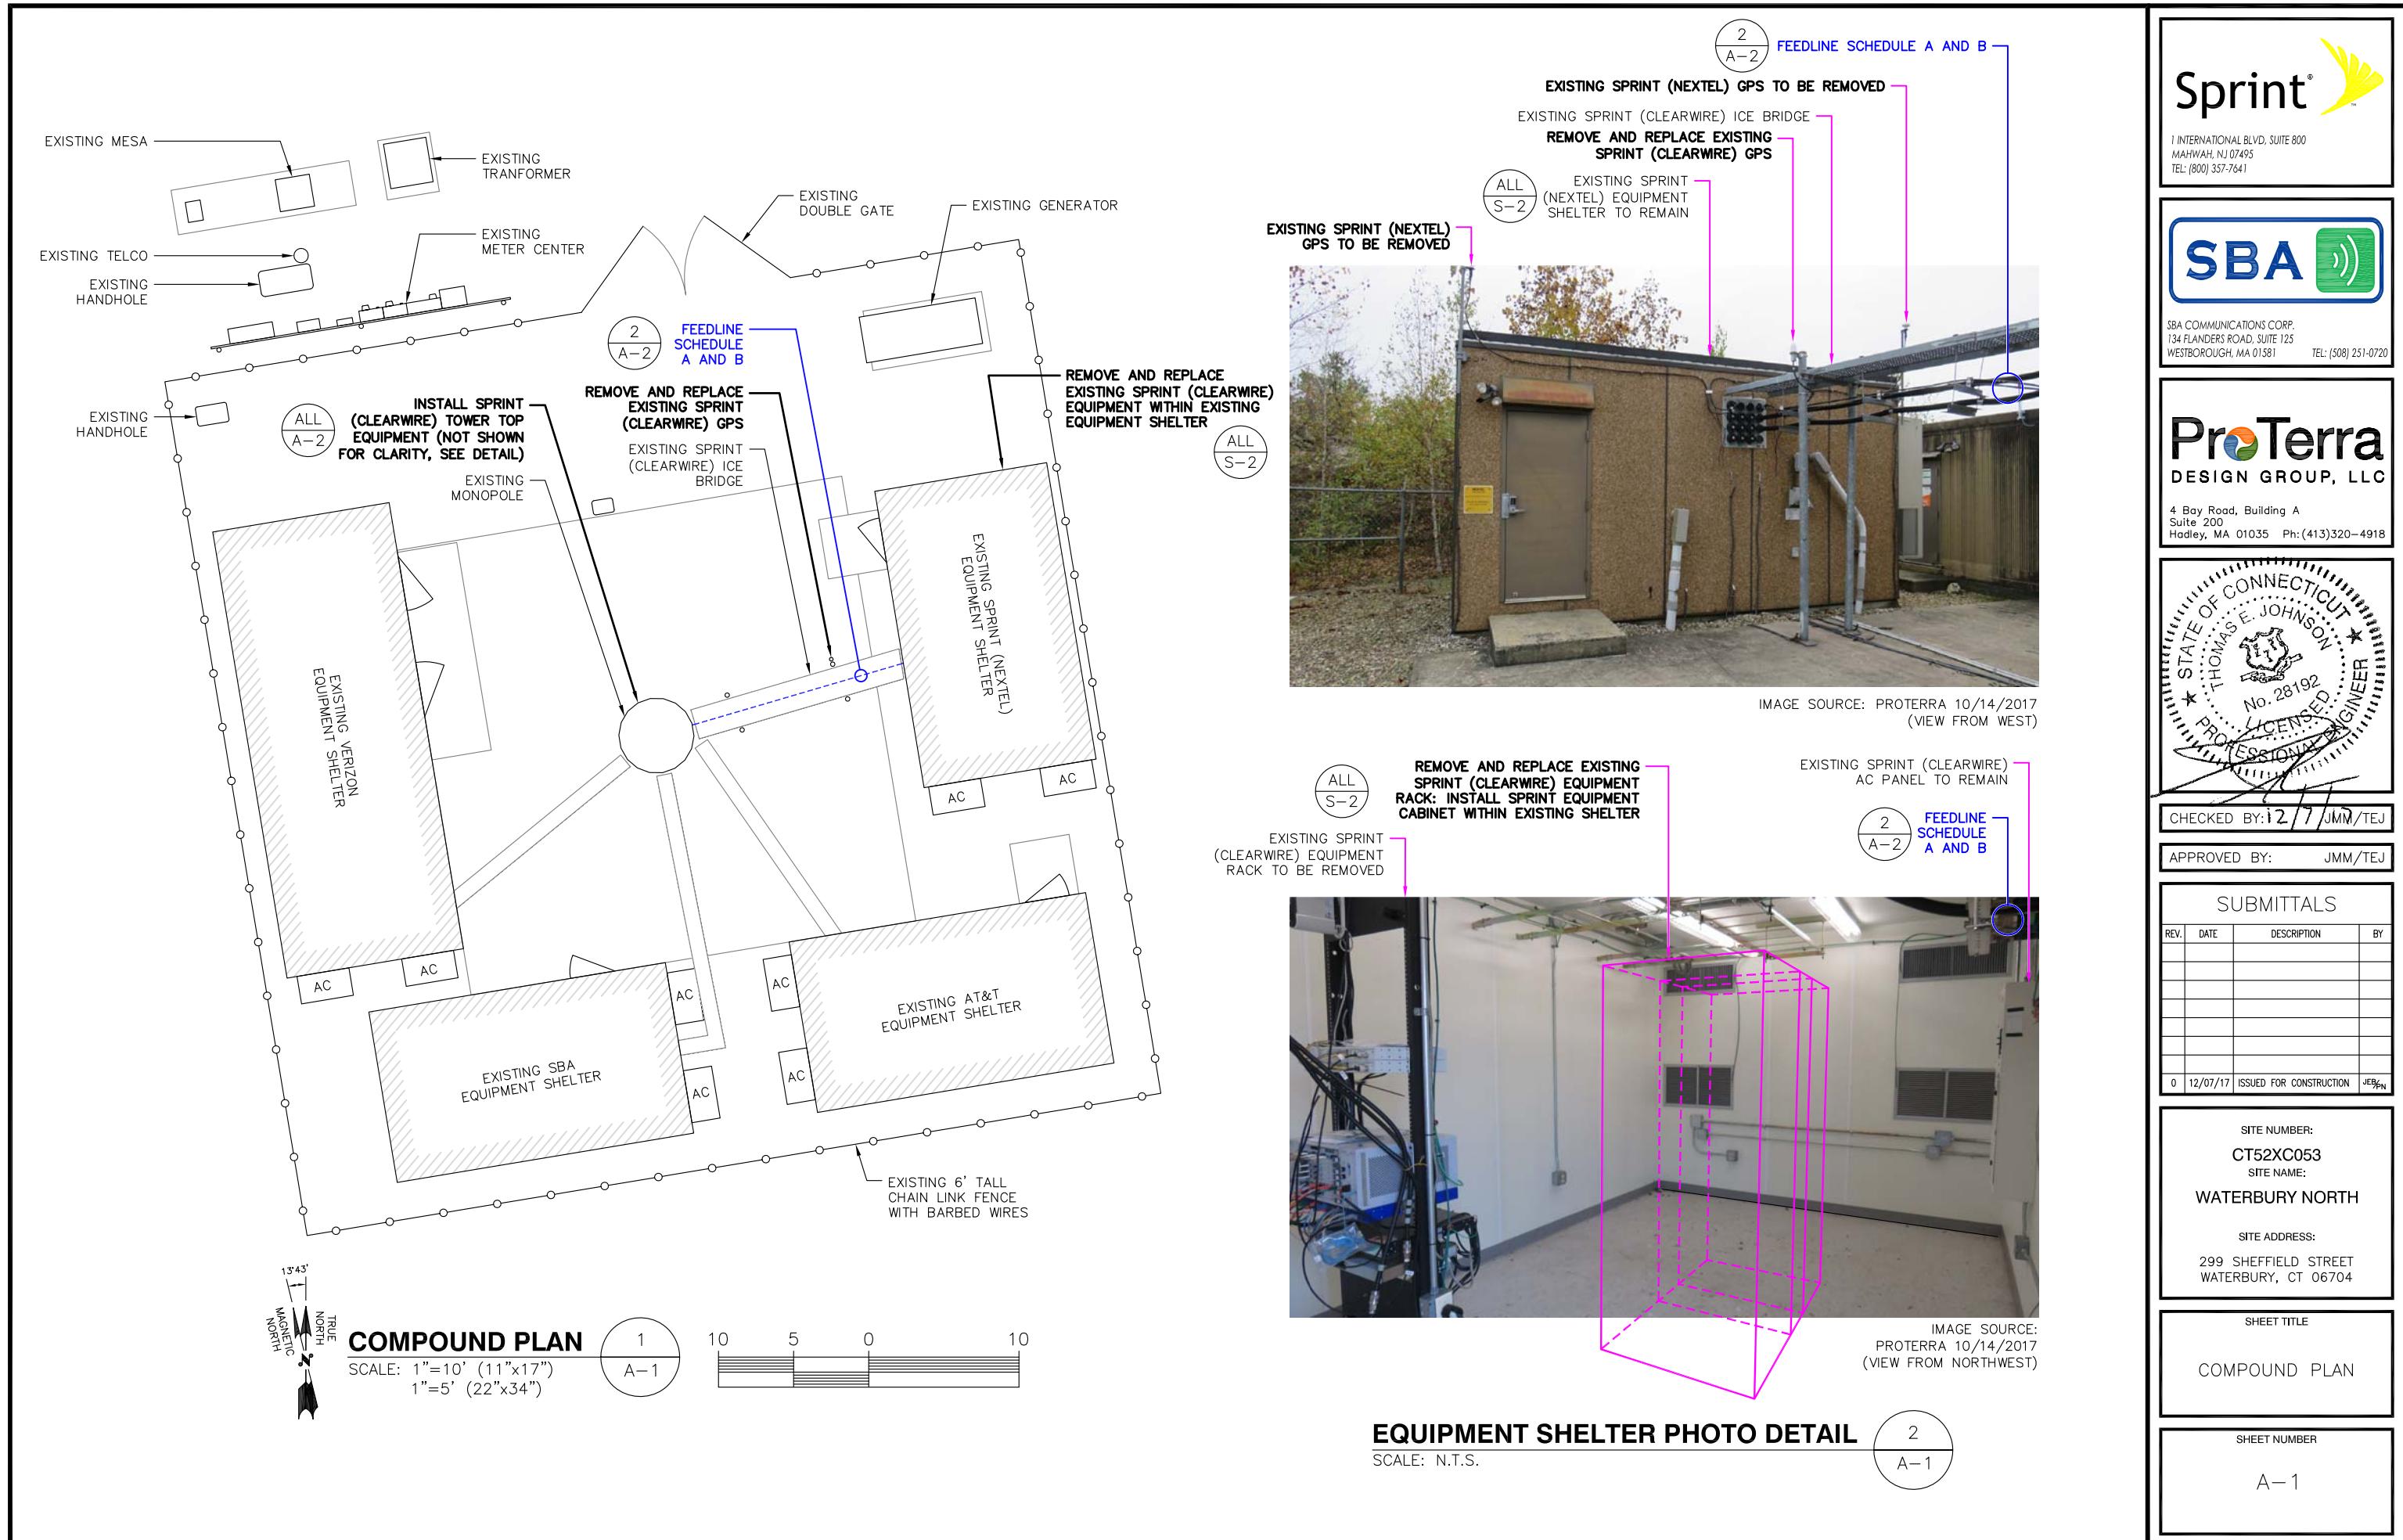

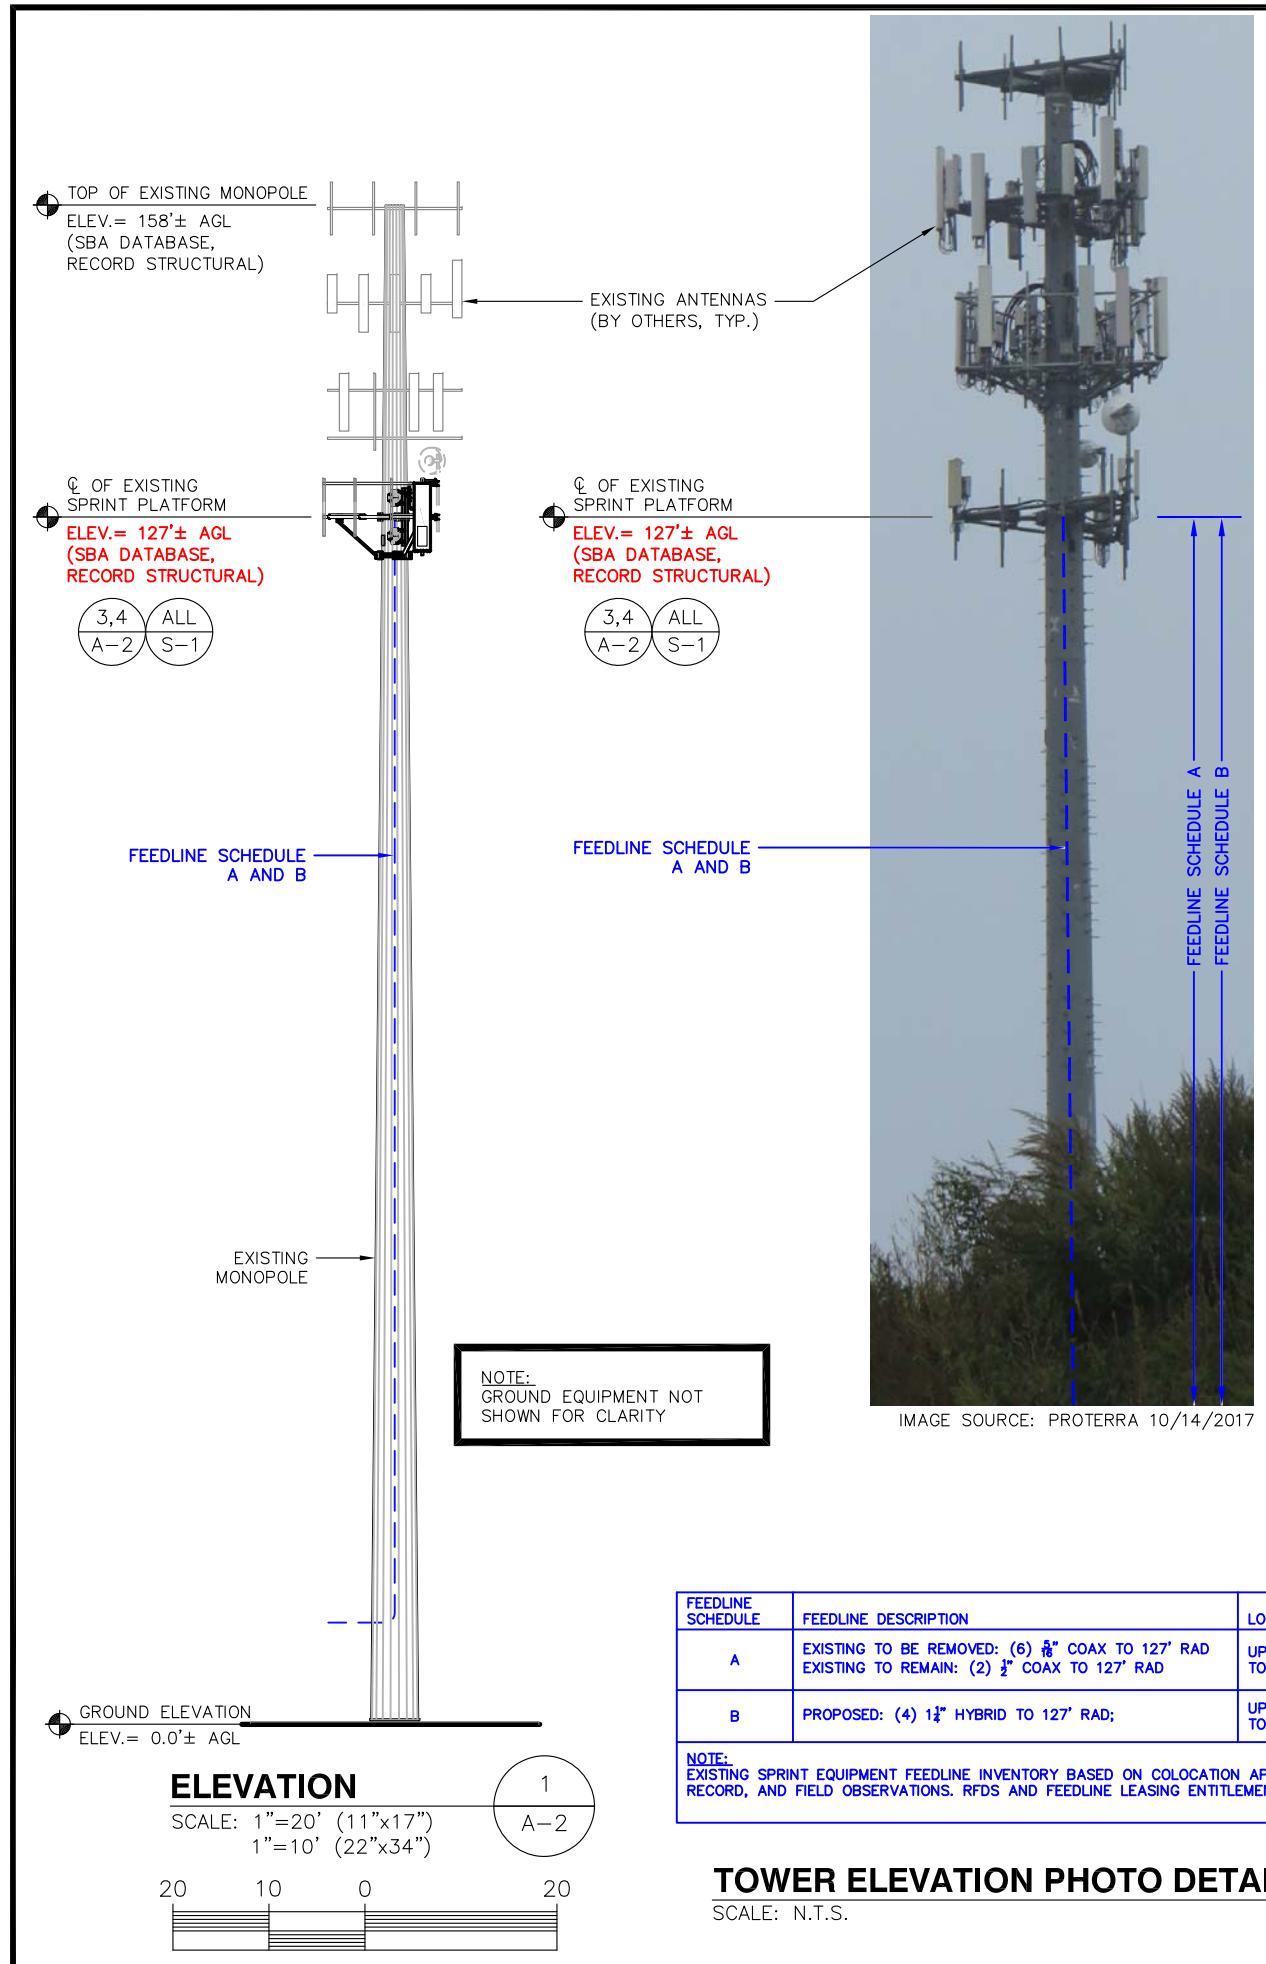

SPECIAL CONSTRUCTION NOTE:
SPRINT WORK IS CONTINGENT ON THE FOLLOWING:
* COMPLETION OF A GLOBAL STRUCTURAL STABILITY ANALYSIS.
* COMPLETION OF A MOUNT STRUCTURAL ANALYSIS.
* GC SHALL FURNISH, INSTALL AND COMPLETE ALL REQUIRED
STRUCTURAL MODIFICATIONS AS INDICATED IN BEFORE-MENTIONED
GLOBAL AND MOUNT ANALYSIS.

SPECIAL PRE-CONSTRUCTION WORK NOTE
(SBA-PROVIDED TOWER STRUCTURAL ANALYSIS
SPECIAL EQUIPMENT INSTALLATION REQUIREMENTS):
GENERAL CONTRACTOR SHALL FURNISH AND
INSTALL ALL SPECIAL OR SUPPLEMENTAL
ADDITIONAL TOWER-MOUNTED EQUIPMENT PER
RECOMMENDATIONS FROM SBA-PROVIDED TOWER
STRUCTURAL ANALYSIS FOR ANY SPECIAL
SHIELDING OF TOWER TOP EQUIPMENT AND FOR
ANY SPECIAL FEEDLINE BUNDLING OR RELOCATION.

REMOVE EXISTING SPRINT
(CLEARWIRE) RRH, (TYP. OF 1
PER SECTOR, TOTAL OF 3)

REMOVE AND REPLACE EXISTING
SPRINT ANTENNA (LPX310R), (TYP.
OF 1 PER SECTOR, TOTAL OF 3)

SPECIAL CONSTRUCTION NOTE (ANTENNA MOUNT STRUCTURAL AUGMENT SCHEMATIC DESIGN NOT FOR FINAL CONSTRUCTION): GENERAL CONTRACTOR SHALL FURNISH AND INSTALL ALL ANTENNA MOUNT STRUCTURAL AUGMENTS AND STRUCTURAL MODIFICATIONS AT THE SPRINT RAD/VERTICAL EQUIPMENT SPACE PER RECOMMENDATIONS FROM SBA—PROVIDED ANTENNA MOUNT STRUCTURAL ANALYSIS AND ANY SUPPLEMENTAL CONSTRUCTION DRAWINGS (PROVIDED BY OTHERS). SCHEMATIC DESIGNS DEPICTED IN MAGENTA ARE PRELIMINARY ONLY AND ARE NOT FOR FINAL CONSTRUCTION.

EXISTING ANTENNA PLAN

SCALE: N.T.S

ALL 3 INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. -
OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON
PIPE MOUNT BEHIND PROPOSED ANTENNA
S-1 A-3

ALL 4
S-1 **A-3** **INSTALL SPRINT RRH (TD-RRH8X20-25), (TYP. - OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON BACK-TO-BACK PIPE MOUNTS ON SECTOR FRAME STAND-OFF ARM TYP (ABOVE PLATFORM)**

ALL 2
S-1 A-3

INSTALL SPRINT RRH (800MHZ 2X50), (TYP. -
OF 2 PER SECTOR, TOTAL OF 6) MOUNTED
ON BACK-TO-BACK PIPE MOUNTS ON
SECTOR FRAME STAND-OFF ARM. TYP.

EXISTING MONPOLE -

REMOVE AND REPLACE EXISTING SPRINT ANTENNA: INSTALL SPRINT ANTENNA (ETCR-654L12H6), (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED TO PROPOSED PIPE MAST



N

EXISTING SPRINT (CLEARWIRE) MICROWAVE DISH TO REMAIN,

PROPOSED ANTENNA PLAN

SCALE: N.T.S.

SPECIAL INSTALLATION NOTE:
JUMPERS FROM RRHs TO ANTENNA SHALL NOT
EXCEED 15'. NOTIFY SPRINT CONSTRUCTION
MANAGER OF ANY DISCREPANCY


NOTE:
VERIFY PROPOSED AZIMUTHS
WITH RF ENGINEER PRIOR TO
INSTALLATION



SBA COMMUNICATIONS CORP.
134 FLANDERS ROAD, SUITE 125
WESTBOROUGH, MA 01581 TEL: (508) 251-0720



4 Bay Road, Building A
Suite 200
Hadley, MA 01035 Ph: (413)320-4918

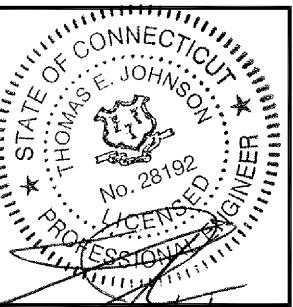

CHECKED BY: 12 / 7 / JMM / TEJ

APPROVED BY: JMM/TEJ

SUBMITTALS

REV.	DATE	DESCRIPTION	BY
0	12/07/17	ISSUED FOR CONSTRUCTION	JER/CFN

SITE NUMBER:
CT52XC053
SITE NAME:
WATERBURY NORTH

SITE ADDRESS:
299 SHEFFIELD STREET

SHEET TITLE

**ELEVATION AND
ANTENNA PLANS**

SHEET NUMBER



1 INTERNATIONAL BLVD, SUITE 800
MAHWAH, NJ 07495
TEL: (800) 357-7641



SBA COMMUNICATIONS CORP.
134 FLANDERS ROAD, SUITE 125
WESTBOROUGH, MA 01581
TEL: (508) 251-0720



4 Bay Road, Building A
Suite 200
Hadley, MA 01035 Ph:(413)320-4918



CHECKED BY: 12/7 JMM/TEJ


APPROVED BY: JMM/TEJ

SUBMITTALS			
REV.	DATE	DESCRIPTION	BY
0	12/07/17	ISSUED FOR CONSTRUCTION	JEB/PN

SITE NUMBER:
CT52XC053
SITE NAME:
WATERBURY NORTH
SITE ADDRESS:
299 SHEFFIELD STREET
WATERBURY, CT 06704


SHEET TITLE
TOWER EQUIPMENT DETAILS

SHEET NUMBER
A-3

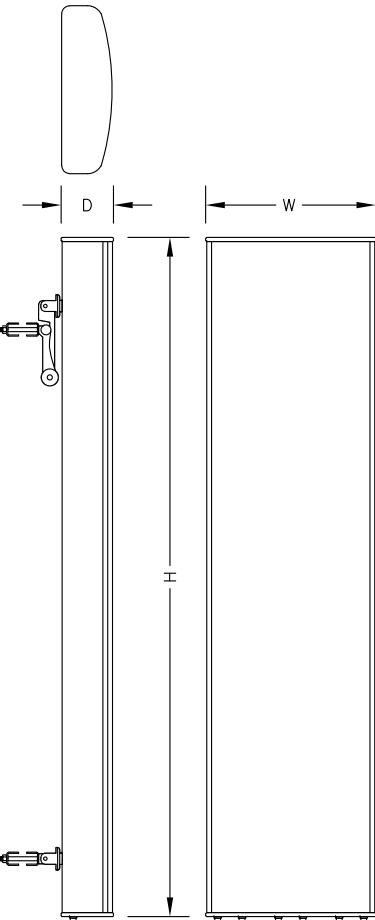


ANTENNA DETAIL
SCALE: N.T.S.

1
A-3

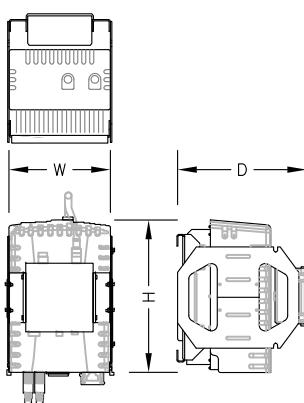


800 MHZ RRH DETAIL
SCALE: N.T.S.

2
A-3

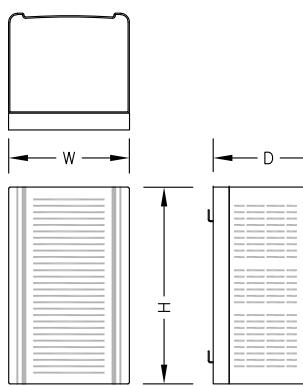

1900 MHz RRH DETAIL
SCALE: N.T.S.

3
A-3

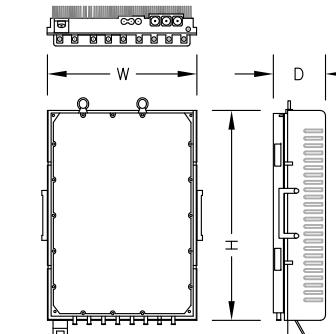


2.5 GHz RRH DETAIL
SCALE: N.T.S.

4
A-3

MAJOR RF EQUIPMENT LIST				
(GC SHALL FURNISH AND INSTALL ALL OTHER MATERIALS AND EQUIPMENT NOT SUPPLIED BY SPRINT)				
DESCRIPTION	QUANTITY	UNITS	MAKE/MODEL/MATERIAL	PROVIDED BY
ANTENNA	3	EA	KMW ETCR-654L12H6	SPRINT
2500 RRH	3	EA	NOKIA (ALU) TD-RRH8x20-25	SPRINT
1900 RRH	3	EA	NOKIA (ALU) 1900 4X45 65MHz	SPRINT
800 RRH	6	EA	NOKIA (ALU) 800MHz 2x50W	SPRINT
FIBER	4 @ 205' ± FROM FIBER CABINET	LINEAR FEET LISTED [INCLUDES (2) 10' COILS]	1-1/4" HYBRIFLEX	SPRINT

SPRINT-PROVIDED EQUIPMENT SCHEDULE
SCALE: N.T.S.

5
A-3

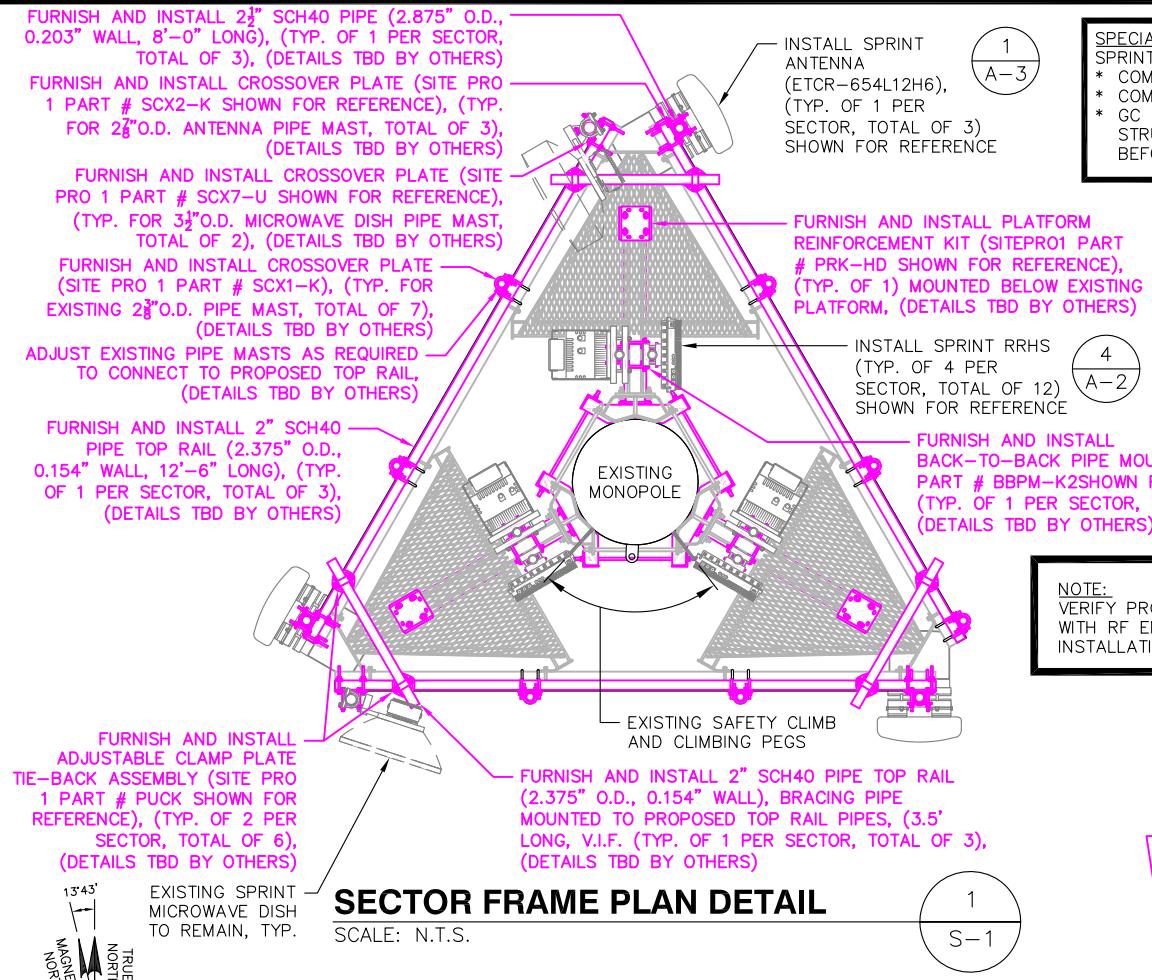

SPECIAL CONSTRUCTION NOTE:
SPRINT WORK IS CONTINGENT ON THE FOLLOWING:
* COMPLETION OF A GLOBAL STRUCTURAL STABILITY ANALYSIS.
* COMPLETION OF A MOUNT STRUCTURAL ANALYSIS.
* GC SHALL FURNISH, INSTALL AND COMPLETE ALL REQUIRED STRUCTURAL MODIFICATIONS AS INDICATED IN BEFORE-MENTIONED GLOBAL AND MOUNT ANALYSIS.

SPECIAL PRE-CONSTRUCTION WORK NOTE (SBA-PROVIDED TOWER STRUCTURAL ANALYSIS SPECIAL EQUIPMENT INSTALLATION REQUIREMENTS):
GENERAL CONTRACTOR SHALL FURNISH AND INSTALL ALL SPECIAL OR SUPPLEMENTAL ADDITIONAL TOWER-MOUNTED EQUIPMENT PER RECOMMENDATIONS FROM SBA-PROVIDED TOWER STRUCTURAL ANALYSIS FOR ANY SPECIAL SHIELDING OF TOWER TOP EQUIPMENT AND FOR ANY SPECIAL FEEDLINE BUNDLING OR RELOCATION.

NOTE:
VERIFY PROPOSED AZIMUTHS
WITH RF ENGINEER PRIOR TO
INSTALLATION

1,2
S-2

FURNISH AND INSTALL PLATFORM REINFORCEMENT KIT (SITEPRO1 PART # PRK-HD SHOWN FOR REFERENCE), (TYP. OF 1) MOUNTED BELOW EXISTING PLATFORM, (DETAILS TBD BY OTHERS)

REMOVE EXISTING SPRINT (CLEARWIRE) ANTENNA, RRH, AND PIPE MAST, (TYP. OF 1 EA. PER SECTOR, TOTAL OF 3 EA.)

EXISTING SPRINT EQUIPMENT PLATFORM TO REMAIN

FURNISH AND INSTALL PLATFORM REINFORCEMENT KIT (SITEPRO1 PART # PRK-HD SHOWN FOR REFERENCE), (TYP. OF 1) MOUNTED BELOW EXISTING PLATFORM, (DETAILS TBD BY OTHERS)

IMAGE SOURCE:
PROTERRA 10/14/2017

SECTOR FRAME PLAN DETAIL

SCALE: N.T.S.

4
A-3

INSTALL SPRINT RRH (TD-RRH8X20-25), (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON BACK-TO-BACK PIPE MOUNTS ON PLATFORM STAND-OFF ARM, TYP. (SEE DETAIL 4/A-2 FOR ALIGNMENTS PER SECTOR)

FURNISH AND INSTALL 2" SCH40 PIPE (2.875" O.D., 0.203" WALL, 6'-0" LONG), (TYP. OF 2 PER SECTOR, TOTAL OF 6), (DETAILS TBD BY OTHERS)

FURNISH AND INSTALL BACK-TO-BACK PIPE MOUNT (SITE PRO 1 PART # BBPM-K2), (TYP. OF 1 PER SECTOR, TOTAL OF 3), (DETAILS TBD BY OTHERS)

ADJUST EXISTING PIPE MASTS AS REQUIRED TO CONNECT TO PROPOSED TOP RAIL, TYP.

FURNISH AND INSTALL 2" SCH40 PIPE TOP RAIL (2.375" O.D., 0.154" WALL, 12'-6" LONG), (TYP. OF 1 PER SECTOR, TOTAL OF 3), (DETAILS TBD BY OTHERS)

INSTALL SPRINT RRH (800MHZ 2X50), (TYP. OF 2 PER SECTOR, TOTAL OF 6) MOUNTED ON BACK-TO-BACK PIPE MOUNTS ON PLATFORM STAND-OFF ARM, TYP. (SEE DETAIL 4/A-2 FOR ALIGNMENTS PER SECTOR)

2
A-3

EXISTING SPRINT (CLEARWIRE) EQUIPMENT PLATFORM

TRIM PROPOSED DIAGONAL ANGLE AS REQUIRED, (DETAILS TBD BY OTHERS)

FURNISH AND INSTALL PLATFORM REINFORCEMENT KIT (SITEPRO1 PART # PRK-HD SHOWN FOR REFERENCE), (TYP. OF 1) MOUNTED BELOW EXISTING PLATFORM, (DETAILS TBD BY OTHERS)

SPECIAL TOWER TOP EQUIPMENT INSTALLATION WORK NOTE (SAFETY-CLIMB ALIGNMENT REQUIREMENTS):
GENERAL CONTRACTOR SHALL ORIENT PROPOSED SPRINT COLLAR-MOUNTS SO THAT EXISTING SAFETY CLIMB CABLE IS NOT OBSTRUCTED/RE-Routed FROM VERTICAL ALIGNMENT AND IS NOT IN PHYSICAL CONTACT WITH EXISTING OR PROPOSED COLLAR-MOUNT HARDWARE. GENERAL CONTRACTOR SHALL INSTALL NEW OR ADDITIONAL SAFETY-CLIMB CABLE GUIDES IF ADDITIONAL CLEARANCE IS REQUIRED. ADDITIONAL CABLE GUIDES SHALL BE ATTACHED SECURELY TO THE POLE USING MECHANICAL FASTENERS OR FIELD WELDED BY A CERTIFIED WELDING TECHNICIAN.

ANTENNA AND RRH MOUNTING DETAIL

SCALE: N.T.S.

2
S-1

INSTALL SPRINT RRH (TD-RRH8X20-25), (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON BACK-TO-BACK PIPE MOUNTS ON PLATFORM STAND-OFF ARM, TYP. (SEE DETAIL 4/A-2 FOR ALIGNMENTS PER SECTOR)

FURNISH AND INSTALL 2" SCH40 PIPE (2.875" O.D., 0.203" WALL, 8'-0" LONG), (TYP. OF 1 PER SECTOR, TOTAL OF 3), (DETAILS TBD BY OTHERS)

FURNISH AND INSTALL 2" SCH40 PIPE TOP RAIL (2.375" O.D., 0.154" WALL, 12'-6" LONG), (TYP. OF 1 PER SECTOR, TOTAL OF 3) SHOWN FOR REFERENCE

1
A-3

SPECIAL CONSTRUCTION NOTE: SPRINT WORK IS CONTINGENT ON THE FOLLOWING:
* COMPLETION OF A GLOBAL STRUCTURAL STABILITY ANALYSIS.
* COMPLETION OF A MOUNT STRUCTURAL ANALYSIS.
* GC SHALL FURNISH, INSTALL AND COMPLETE ALL REQUIRED STRUCTURAL MODIFICATIONS AS INDICATED IN BEFORE-MENTIONED GLOBAL AND MOUNT ANALYSIS.

SPECIAL PRE-CONSTRUCTION WORK NOTE (SBA-PROVIDED TOWER STRUCTURAL ANALYSIS SPECIAL EQUIPMENT INSTALLATION REQUIREMENTS):
GENERAL CONTRACTOR SHALL FURNISH AND INSTALL ALL SPECIAL OR SUPPLEMENTAL ADDITIONAL TOWER-MOUNTED EQUIPMENT PER RECOMMENDATIONS FROM SBA-PROVIDED TOWER STRUCTURAL ANALYSIS FOR ANY SPECIAL SHIELDING OF TOWER TOP EQUIPMENT AND FOR ANY SPECIAL FEEDLINE BUNDLING OR RELOCATION.

NOTE:
VERIFY PROPOSED AZIMUTHS
WITH RF ENGINEER PRIOR TO
INSTALLATION

1,2
S-2

FURNISH AND INSTALL 2" SCH40 PIPE (2.875" O.D., 0.203" WALL, 8'-0" LONG), (TYP. OF 1 PER SECTOR, TOTAL OF 3) SHOWN FOR REFERENCE

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2

INSTALL SPRINT RRH (1900 4X45 65MHZ) (TYP. OF 1 PER SECTOR, TOTAL OF 3) MOUNTED ON PIPE MOUNT BEHIND PROPOSED ANTENNA

1,2
S-2


INSTALL SPRINT RRH (



SBA COMMUNICATIONS CORP.
134 FLANDERS ROAD, SUITE 125
WESTBOROUGH, MA 01581
TEL: (508) 251-0720

ProTerra
DESIGN GROUP, LLC

4 Bay Road, Building A
Suite 200
Hadley, MA 01035 Ph:(413)320-4918

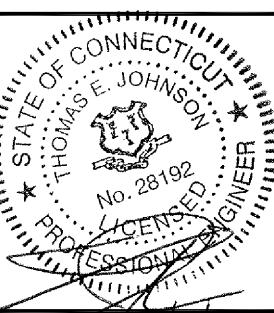

CHECKED BY: 12/7/17 JMM/TEJ


APPROVED BY: JMM/TEJ

SUBMITTALS		
REV.	DATE	DESCRIPTION
0	12/07/17	ISSUED FOR CONSTRUCTION JEB/PN

SITE NUMBER:
CT52XC053
SITE NAME:
WATERBURY NORTH
SITE ADDRESS:
299 SHEFFIELD STREET
WATERBURY, CT 06704

SHEET TITLE
GROUND EQUIPMENT DETAILS

SHEET NUMBER
S-2

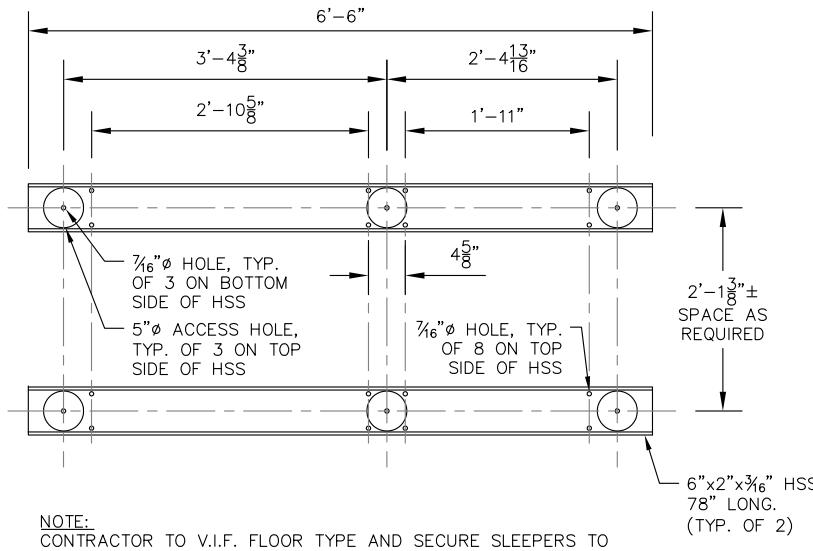

STEEL SLEEPER DETAIL

SCALE: N.T.S.

Maintain 3' clear in front of equipment cabinet access per NEC


Existing Sprint (Clearwire) equipment rack to be removed

Remove and replace existing Sprint (Clearwire) equipment rack; install Sprint equipment cabinet within existing equipment shelter

Anchor cabinet to HSS steel sleeper per manufacturer recommended hardware or minimum of $\frac{1}{2}$ " SS 304 bolt, length as required cabinet, (typ of 4 anchors per skid, total of 16)


Furnish and install 6"x2"x $\frac{3}{16}$ ", 78" long HSS steel sleeper. (total of 2)

NOTE:
Signage required noting the live loading not to exceed 40 psf.

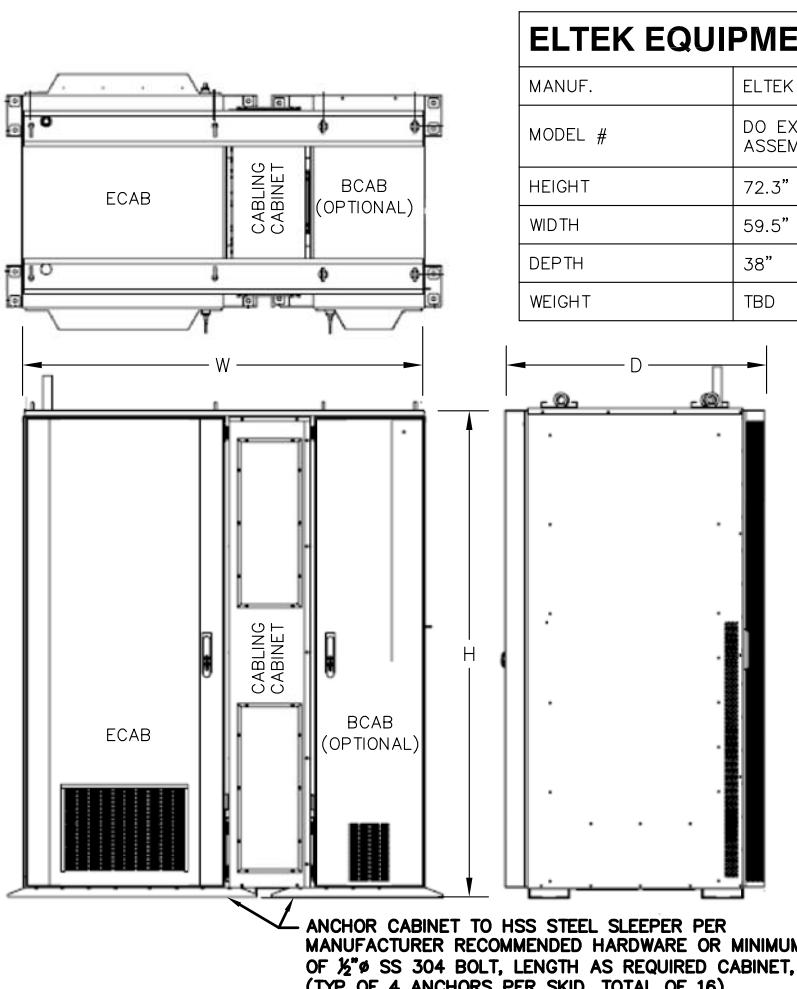

ELTEK EQUIPMENT CABINET DETAIL

SCALE: N.T.S.

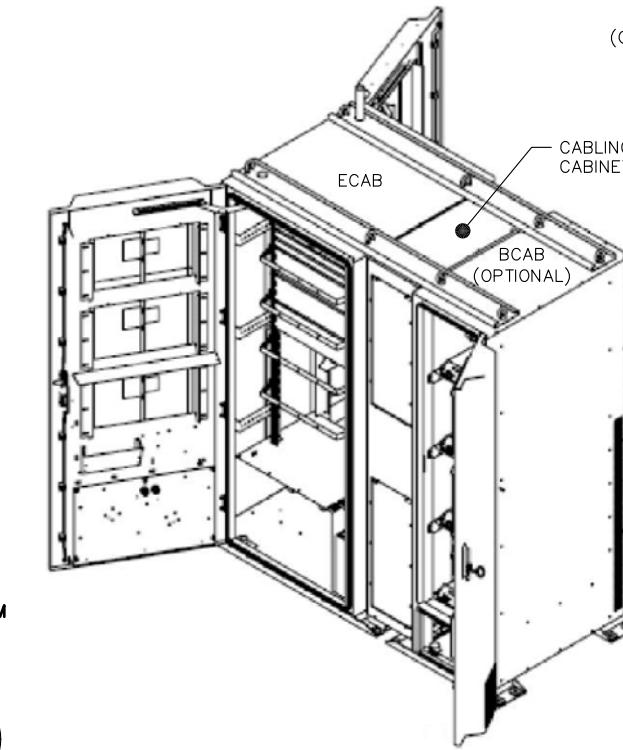

Maintain 3' clear in front of equipment cabinet access per NEC

Remove and replace existing Sprint (Clearwire) GPS

Existing Sprint (Clearwire) ICE bridge

Existing Sprint (Clearwire) cable entry port
Existing Sprint (Clearwire) AC panel to remain

Maintain 3' clear in front of AC panel access per NEC

Existing Sprint (Clearwire) equipment shelter

Existing tower concrete foundation (shown for reference)


Existing tower concrete foundation (shown for reference)

GROUND LEVEL EQUIPMENT PLAN

SCALE: N.T.S.



3
S-2

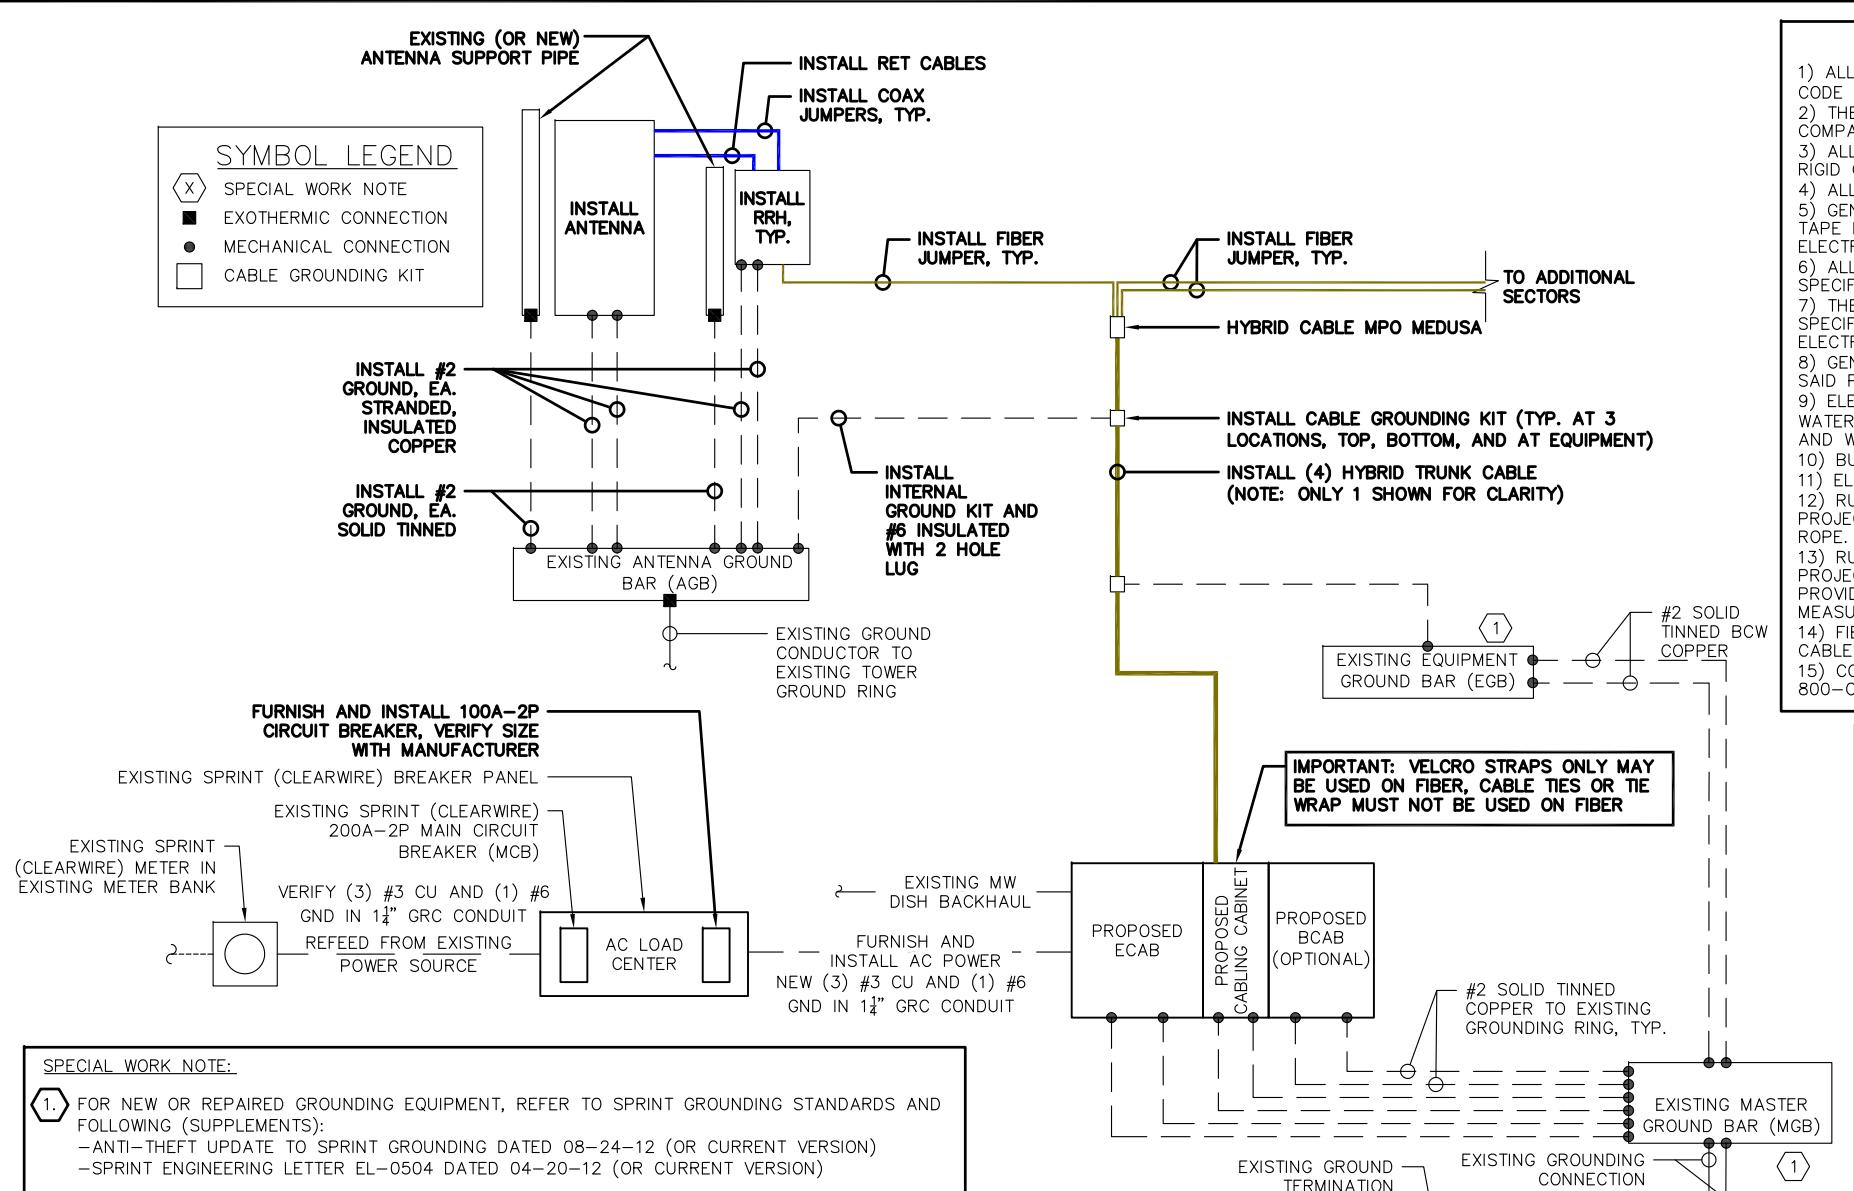

SPECIAL WORK NOTE:

- ① FOR NEW OR REPAIRED GROUNDING EQUIPMENT, REFER TO SPRINT GROUNDING STANDARDS AND FOLLOWING (SUPPLEMENTS):
- ANTI-THEFT UPDATE TO SPRINT GROUNDING DATED 08-24-12 (OR CURRENT VERSION)
- SPRINT ENGINEERING LETTER EL-0504 DATED 04-20-12 (OR CURRENT VERSION)

TYPICAL POWER AND GROUNDING LINE DIAGRAMS

CALENTES

EXISTING GROUNDING BAR ON WALL, FLOOR,
OR ON ANTENNA TOWER

2# AWG STRANDED INSULATED, #4 OR
#6 AWG SOLID CU CONDUCTOR WITH
GREEN, 600V, THWN-2 INSULATION

TWO HOLE SPADE, TO BE USED
TO CONNECT TO GROUND BAR

1. APPLY NO-OX TO LUG AND BAR CONTACT SURFACE. DO NOT COAT INLINE LUG.
 2. IF STOLEN GROUND BARS ARE ENCOUNTERED, CONTACT SPRINT CM FOR
REFL ACFMNT THREAFED ROD KIT

INSTALLATION OF GROUNDING CONDUCTOR TO GROUNDING BAR

SCALE: N.T.S.



TWO HOLE

ELECTRICAL NOTES


- 1) ALL ELECTRICAL WORK SHALL CONFORM TO THE REQUIREMENTS OF THE NATIONAL ELECTRICAL CODE (NEC) AS WELL AS APPLICABLE STATE AND LOCAL CODES.
- 2) THE ELECTRICAL CONTRACTOR SHALL COORDINATE ALL CONDUIT ROUTING WITH LOCAL UTILITY COMPANIES AND SPRINT CONSTRUCTION MANAGER.
- 3) ALL CONDUITS ROUTED BELOW GRADE SHALL TRANSITION TO RIGID GALVANIZED ELBOWS WITH RIGID GALVANIZED STEEL CONDUIT ABOVE GRADE.
- 4) ALL METAL CONDUITS SHALL BE PROVIDED WITH GROUNDING BUSHINGS.
- 5) GENERAL CONTRACTOR SHALL PROVIDE ALL DIRECT BURIED CONDUITS WITH PLASTIC WARNING TAPE IDENTIFYING CONTENTS. TAPE COLORS SHALL BE ORANGE FOR TELEPHONE AND RED FOR ELECTRIC.
- 6) ALL ELECTRICAL ITEMS SHALL BE U.L. APPROVED OR LISTED AND PROCURED PER SPECIFICATION REQUIREMENTS.
- 7) THE ELECTRICAL WORK INCLUDES ALL LABOR AND MATERIALS DESCRIBED BY DRAWINGS AND SPECIFICATIONS INCLUDING INCIDENTAL WORK TO PROVIDE COMPLETE OPERATING AND APPROVED ELECTRICAL SYSTEM.
- 8) GENERAL CONTRACTOR SHALL PAY FEES FOR PERMITS, AND IS RESPONSIBLE FOR OBTAINING SAID PERMITS AND COORDINATION OF INSPECTIONS.
- 9) ELECTRICAL AND TELCO WIRING OUTSIDE A BUILDING AND EXPOSED TO WEATHER SHALL BE IN WATER TIGHT GALVANIZED RIGID STEEL CONDUITS OR SCHEDULE 80 PVC (AS PERMITTED BY CODE) AND WHERE REQUIRED IN LIQUID TIGHT FLEXIBLE METAL OR NONMETALLIC CONDUITS.
- 10) BURIED CONDUIT SHALL BE SCHEDULE 40 PVC.
- 11) ELECTRICAL WIRING SHALL BE COPPER WITH TYPE XHHW, THWN, OR THIN INSULATION.
- 12) RUN ELECTRICAL CONDUIT OR CABLE BETWEEN ELECTRICAL UTILITY DEMARCTION POINT AND PROJECT OWNER CELL SITE PPC AS INDICATED ON THIS DRAWING. PROVIDE FULL LENGTH PULL ROPE. COORDINATE INSTALLATION WITH UTILITY COMPANY.
- 13) RUN TELCO CONDUIT OR CABLE BETWEEN TELEPHONE UTILITY DEMARCTION POINT AND PROJECT OWNER CELL SITE TELCO CABINET AND BTS CABINET AS INDICATED ON THIS DRAWING. PROVIDE FULL LENGTH PULL ROPE IN INSTALLED TELCO CONDUIT. PROVIDE GREENLEE CONDUIT MEASURING TAPE AT EACH END.
- 14) FIBER OPTIC CIRCUITS SHALL BE IN ACCORDANCE WITH NEC ARTICLE 770—OPTICAL FIBER CABLES AND RACEWAYS.
- 15) COMMUNICATIONS CIRCUITS SHALL BE IN ACCORDANCE WITH NEC ARTICLE 800—COMMUNICATIONS SYSTEMS.



SBA COMMUNICATIONS CORP.
134 FLANDERS ROAD, SUITE 125
WESTBOROUGH, MA 01581 TEL: (508) 251-0724



4 Bay Road, Building A
Suite 200
Hadley, MA 01035 Ph:(413)320-4918

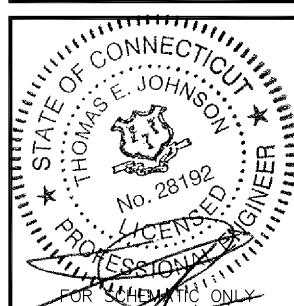

PROTECTIVE GROUNDING SYSTEMS GENERAL NOTES:

- PROTECTIVE GROUNDING SYSTEMS - GENERAL NOTES:**

 1. GROUNDING SHALL BE IN ACCORDANCE WITH NEC ARTICLE 250-GROUNDING AND BONDING.
 2. GROUNDING SHALL BE IN ACCORDANCE WITH SPRINT SSEO DOCUMENTS 3.018.02.004 "BONDING, GROUNDING AND TRANSIENT PROTECTION FOR CELL SITES" AND 3.018.10.002 "SITE RESISTANCE TO EARTH TESTING".
 3. PROVIDE GROUND CONNECTIONS FOR ALL METALLIC STRUCTURES, ENCLOSURES, RACEWAYS AND OTHER CONDUCTIVE ITEMS ASSOCIATED WITH THE INSTALLATION OF CARRIER'S EQUIPMENT.
 4. GROUND CONNECTIONS: CLEAN SURFACES THOROUGHLY BEFORE APPLYING GROUND LUGS OR CLAMPS. IF SURFACE IS COATED, REMOVE THE COATING, APPLY A NON-CORROSIVE APPROVED COMPOUND TO CLEAN SURFACE AND INSTALL LUGS OR CLAMPS. WHERE GALVANIZING IS REMOVED FROM METAL, IT SHALL BE PAINTED OR TOUCHED UP WITH "GALVAMOX" OR EQUAL.
 5. ALL GROUNDING WIRES SHALL PROVIDE A STRAIGHT, DOWNWARD PATH TO GROUND WITH GRADUAL BENDS AS REQUIRED. GROUND WIRES SHALL NOT BE LOOPED OR SHARPLY BENT.
 6. ALL CLAMPS AND SUPPORTS USED TO SUPPORT THE GROUNDING SYSTEM CONDUCTORS AND PVC CONDUITS SHALL BE PVC TYPE (NON CONDUCTIVE). DO NOT USE METAL BRACKETS OR SUPPORTS WHICH WOULD FORM A COMPLETE RING AROUND ANY GROUNDING CONDUCTOR.
 7. ALL GROUND WIRES SHALL BE #2 SOLID TINNED BCW UNLESS NOTED OTHERWISE.
 8. PROVIDE DEDICATED #2 AWG COPPER GROUND WIRE FROM EACH ANTENNA MOUNTING PIPE TO ASSOCIATED CIGBE.
 9. GROUND ANTENNA BASES, FRAMES, CABLE RACKS, AND OTHER METALLIC COMPONENTS WITH #2 INSULATED TINNED STRANDED COPPER GROUNDING CONDUCTORS AND CONNECT TO INSULATED SURFACE MOUNTED GROUND BARS. CONNECTION DETAILS SHALL FOLLOW MANUFACTURER'S SPECIFICATIONS FOR GROUNDING.
 10. EACH EQUIPMENT CABINET SHALL BE CONNECTED TO THE MASTER ISOLATION GROUND BAR (MGB) WITH #2 SOLID TINNED BCW EQUIPMENT CABINETS WALL HAVE (2) CONNECTIONS.
 11. GROUND HYBRIFLEX SHIELD AT TOP, BOTTOM AND AT TRANSITION TO HYBRIFLEX JUMPER CABLES AT EQUIPMENT CABINET ENTRANCE USING MANUFACTURER'S GUIDELINES. WHEN HYBRIFLEX CABLE EXCEEDS 200', GROUND AT INTERVALS NOT EXCEEDING 100'.
 12. THE CONTRACTOR SHALL VERIFY THAT THE EXISTING GROUND BARS HAVE ENOUGH SPACE/HOLES FOR ADDITIONAL TWO HOLE LUGS.
 13. EXOTHERMIC WELDING IS RECOMMENDED FOR GROUNDING CONNECTION WHERE PRACTICAL OTHERWISE. THE CONNECTION SHALL BE MADE USING COMPRESSION TYPE-2 HOLES, LONG BARREL LUGS OR DOUBLE CRIMP "C" CLAMP. THE COPPER CABLES SHALL BE COATED WITH AN ANTI-OXIDANT (THOMAS BETTS KOPR-SHILD) BEFORE MAKING THE CRIMP CONNECTIONS THE CONTRACTOR SHALL FOLLOW MANUFACTURER'S RECOMMENDED TORQUES ON THE BOLT ASSEMBLY TO SECURE CONNECTIONS.
 14. AT ALL TERMINATIONS AT EQUIPMENT ENCLOSURES, PANEL, AND FRAMES OF EQUIPMENT AND WHERE EXPOSED FOR GROUNDING. CONDUCTOR TERMINATION SHALL BE PERFORMED UTILIZING TWO HOLE BOLTED TONGUE COMPRESSION TYPE LUGS WITH STAINLESS STEEL SELF-TAPPING SCREWS.
 15. THE MASTER GROUND BAR (MGB) SHALL BE MADE OF BARE 1/4"x2" COPPER (FOR OUTDOOR APPLICATIONS IT SHALL BE TINNED COPPER) AND LARGE ENOUGH TO ACCOMMODATE THE REQUIRED NUMBER OF GROUND CONNECTIONS. THE HARDWARE SECURING THE MGB SHALL ELECTRICAL INSULATE THE MGB FROM ANY STRUCTURE TO WHICH IT IS FASTENED.
 16. ALL BOLTS, WASHERS, AND NUTS USED ON GROUNDING CONNECTIONS SHALL BE STAINLESS STEEL.
 17. ALL GROUNDING CONNECTIONS SHALL BE COATED WITH A COPPER SHIELD ANTI-CORROSIVE AGENT SUCH AS T&B KOPR SHIELD. VERIFY PRODUCT WITH SPRINT CONSTRUCTION MANAGER.
 18. FOR NEW OR REPAIRED GROUNDING EQUIPMENT. REFER TO SPRINT GROUNDING STANDARDS AND FOLLOWING (SUPPLEMENTS):
 - ANTI-THEFT UPDATE TO SPRINT GROUNDING DATED 08-24-12 (OR CURRENT VERSION)
 - SPRINT ENGINEERING LETTER EL-0504 DATED 04-20-12 (OR CURRENT VERSION)

SITE NUMBER:
QTE5XQ25G

C152XL053

SITE ADDRESS:

9 SHEFFIELD STREET

[View all posts by admin](#) | [View all posts in category](#)

ELECTRICAL AND GROUNDING DETAILS

BONDING DETAILS

SHEET NUMBER

1

1



RF Design Sheet

Site Identification	
Cascade	CT-NINN003
SMS Schedule ID	1233412
SMS Schedule Name	DO Macro Upgrade
PID	DOKU_C152X053
RRU OEM	Alcatel Lucent
Switch OEM	ALU
RFDS Issue Date	2017-03-16 00:00:00
RFDS Revision Date	2017-03-16 00:00:00
RFDS Revision	1

Contact Information	
Engineer Email	Bill.M.Hastings@sprint.com
Sprint Badged RF Engineer	Bill Hastings
RF Engineer Email	Bill.M.Hastings@sprint.com
RF Engineer Phone	978-590-9700
RF Manager	Jonathan Hull
RF Manager Email	Jonathan.B.Hull@sprint.com
RF Manager Phone	617-233-2920

Location Details	
Latitude	41.593658
Longitude	-73.050623
Market	Southern Connecticut
Region	Northeast
City	Waterbury
State	CT
Zip Code	06704
County	New Haven

Carrier Count	
2500 LTE	3
1900 LTE	1
1900 EVDO	1
800 LTE	1
800 Voice	1

Filter Analysis Complete	
RFDS - Issue Date	YES

Design Status	
Border Analysis Complete	Complete

Project Description	
DO Macro Upgrade - Add RRU (3G + 4G) and 1900 MHz	

Additional RF Notes

Replace Existing Antenna with 16 port KMW Panel Antenna for 1900 4T4R, 800 2T4R and 2500 8T8R.

Band: 2500 Alpha Beta Gamma Delta Epsilon Zeta

Antenna1

Model Number	Antenna assigned on a different band	Antenna assigned on a different band	Antenna assigned on a different band	N/A	N/A	N/A
Weight (lbs)	0	0	0	N/A	N/A	N/A
Dimensions	0 x 0 x 0	0 x 0 x 0	0 x 0 x 0	N/A	N/A	N/A
Manufacturer	-	-	-	N/A	N/A	N/A
Ant1 Top Jumper Make/Mode/Qty	2.5 Jumper	8	2.5 Jumper	8	N/A	0
Ant1 RF requested Diameter	1/2"	1/2"	1/2"	N/A	N/A	N/A
Ant1 RF requested Top Jumper Length(ft)	8	8	8	N/A	N/A	N/A
Antenna 1 Azimuth	60	180	300	N/A	N/A	N/A
Antenna 1 Mechanical DT	N/A	N/A	N/A	N/A	N/A	N/A
Antenna 1 Center Line (ft)	127.0013164	127.0013164	127.0013164	N/A	N/A	N/A
Antenna 1 Electrical DT	2	2	2	N/A	N/A	N/A
Antenna 1 Electrical DT 2	N/A	N/A	N/A	N/A	N/A	N/A
Antenna 1 Electrical DT 3	N/A	N/A	N/A	N/A	N/A	N/A
Antenna 1 Twist	N/A	N/A	N/A	N/A	N/A	N/A

Band: 1900 Alpha Beta Gamma Delta Epsilon Zeta

Antenna1

Model Number	ETCR-654L12H6	ETCR-654L12H6	ETCR-654L12H6	N/A	N/A	N/A
Weight (lbs)	85	85	85	N/A	N/A	N/A
Dimensions	84.9 x 21 x 6.3	84.9 x 21 x 6.3	84.9 x 21 x 6.3	N/A	N/A	N/A
Manufacturer	KMW	KMW	KMW	N/A	N/A	N/A
Ant1 Top Jumper Make/Mode/Qty	800/1900 Jumper	4	800/1900 Jumper	4	N/A	0
Ant1 RF requested Diameter	1/2"	1/2"	1/2"	N/A	N/A	N/A
Ant1 RF requested Top Jumper Length(ft)	8	8	8	N/A	N/A	N/A
Antenna 1 Azimuth	80	180	300	N/A	N/A	N/A
Antenna 1 Mechanical DT	N/A	N/A	N/A	N/A	N/A	N/A
Antenna 1 Center Line (ft)	127.0013164	127.0013164	127.0013164	N/A	N/A	N/A
Antenna 1 Electrical DT	3	3	3	N/A	N/A	N/A
Antenna 1 Electrical DT 2	N/A	N/A	N/A	N/A	N/A	N/A
Antenna 1 Electrical DT 3	N/A	N/A	N/A	N/A	N/A	N/A
Antenna 1 Twist	N/A	N/A	N/A	N/A	N/A	N/A

Band: 800 Alpha Beta Gamma Delta Epsilon Zeta

Antenna1

Model Number	Antenna assigned on a different band	Antenna assigned on a different band	Antenna assigned on a different band	N/A	N/A	N/A
Weight (lbs)	0	0	0	N/A	N/A	N/A
Dimensions	0 x 0 x 0	0 x 0 x 0	0 x 0 x 0	N/A	N/A	N/A
Manufacturer	-	-	-	N/A	N/A	N/A
Ant1 Top Jumper Make/Mode/Qty	800/1900 Jumper	4	800/1900 Jumper	4	N/A	0
Ant1 RF requested Diameter	1/2"	1/2"	1/2"	N/A	N/A	N/A
Ant1 RF requested Top Jumper Length(ft)	8	8	8	N/A	N/A	N/A
Antenna 1 Azimuth	60	180	300	N/A	N/A	N/A
Antenna 1 Mechanical DT	N/A	N/A	N/A	N/A	N/A	N/A
Antenna 1 Center Line (ft)	127.0013164	127.0013164	127.0013164	N/A	N/A	N/A
Antenna 1 Electrical DT	5	5	5	N/A	N/A	N/A
Antenna 1 Electrical DT 2	N/A	N/A	N/A	N/A	N/A	N/A
Antenna 1 Electrical DT 3	N/A	N/A	N/A	N/A	N/A	N/A
Antenna 1 Twist	N/A	N/A	N/A	N/A	N/A	N/A

NOTE: RFDS PROVIDED BY SPRINT DATED 03/16/2017. EXCERPTS TAKEN DEPICT RELEVANT RF DESIGN INFORMATION.
A&E VENDOR SCOPE OF WORK LIMITED TO DESIGN OF MECHANICAL/STRUCTURAL EQUIPMENT ATTACHMENTS.

RF DATA SHEET

SCALE: N.T.S.

1

RF-1

SPRINT CONSTRUCTION STANDARDS:

GENERAL CONTRACTOR SHALL ADHERE TO THE FOLLOWING SPRINT CONSTRUCTION STANDARDS.


- CONSTRUCTION STANDARDS: INTEGRATED CONSTRUCTION STANDARDS FOR WIRELESS SITES – CURRENT VERSION, INCLUDING EXHIBITS A-M.
- CONSTRUCTION SPECIFICATIONS: CONSTRUCTION STANDARDS EXHIBIT A – STANDARD CONSTRUCTION SPECIFICATIONS FOR WIRELESS SITES (CURRENT VERSION).
- GROUNDING STANDARDS: EXTERIOR GROUNDING SYSTEM DESIGN. GROUNDING STANDARDS (SUPPLEMENT): ANTI-THEFT UPDATE TO SPRINT GROUNDING 082412 AND SPRINT ENGINEERING LETTER EL-0504 DATED 04.20.12.
- WEATHER PROOFING STANDARDS: EXCERPT FROM CONSTRUCTION STANDARDS EXHIBIT A, SECTION 3.6 WEATHERPROOFING CONNECTORS AND GROUND KITS.
- COLOR CODING: SPRINT NEXTEL ANT AND LINE COLOR CODING PER SPRINT TS-0200 CURRENT VERSION.
- GENERAL CONTRACTOR TO FIELD VERIFY AZIMUTH AND CL HEIGHT AND MECHANICAL DOWNTILT. IF DIFFERENT THAN CALLED OUT IN RFDS, HALT ANTENNA WORK FOR ONE HOUR, CALL SPRINT RF ENGINEER (OR MANAGER IF RF ENGINEER DOES NOT ANSWER, BUT STILL LEAVE A MESSAGE TO RF ENGINEER) USING SPRINT-PROVIDED CONTACT INFORMATION FOR FURTHER INSTRUCTIONS. IF SPRINT DOES NOT RESPOND WITHIN ONE HOUR, PLACE ANTENNA AT SAME CL HEIGHT AS PLAN AND EMAIL CORRECT CL HEIGHT AND AZIMUTH TO SPRINT RF ENGINEER. UPDATE AS-BUILT DRAWING WITH CORRECT CL HEIGHT. ALSO EMAIL CORRECT ANTENNA CL HEIGHT, AZIMUTH AND MECHANICAL DOWNTILT TO RF ENGINEER.
- AISG TESTS TO VERIFY OPERATION IS TO BE PERFORMED AFTER FINAL INSTALLATION OF ANTENNAS AND AISG CABLES HAVE BEEN CONNECTED. VERIFY OPERATION OF ALL EXISTING SPRINT AISG EQUIPMENT INCLUDING 800MHZ, 1.9GHZ AND 2.5G. TEST INCLUDE COMPLETE DOWNTILT, AZIMUTH (IF APPLICABLE) AND BEAMWIDTH SWINGS (IF APPLICABLE). DOCUMENT AISG TEST RESULTS IN COAX SWEEP TEST SPREADSHEET.
- GENERAL CONTRACTOR MUST INSURE THAT NO OBJECT IS LOCATED IN FRONT OF ANTENNA. THIS MEANS NO OBJECT IS TO BE LOCATED 45 DEGREES LEFT AND RIGHT OF FRONT OF ANTENNA OR 7 DEGREES UP AND DOWN FROM CENTER OF ANTENNA. IF THIS IS NOT POSSIBLE, CONTACT RF ENGINEER FOR FURTHER INSTRUCTION.
- GENERAL CONTRACT IS REQUIRED TO USE A DIGITAL ALIGNMENT TOOL TO SET AZIMUTH, ROLL AND DOWNTILT. AZIMUTH ACCURACY IS TO BE WITHIN 1 DEGREES. DOWNTILT AND ROLL (LEFT TO RIGHT TILT) IS TO BE WITHIN 0.1 DEGREES. IF FOR SOME REASON THIS ACCURACY CANNOT BE ACHIEVED, UPDATE AS-BUILT DRAWINGS AND EMAIL SPRINT RF ENGINEER WITH AS-BUILT SETTINGS. USE 3Z ALIGNMENT TOOL OR EQUIVALENT TOOL. [HTTP://WWW.3ZTELECOM.COM/ANTENNA-ALIGNMENT-TOOL/](http://WWW.3ZTELECOM.COM/ANTENNA-ALIGNMENT-TOOL/).

CHECKED BY: 12/7/JMM/TEJ

APPROVED BY: JMM/TEJ


SUBMITTALS

REV.	DATE	DESCRIPTION	BY
0	12/07/17	ISS	

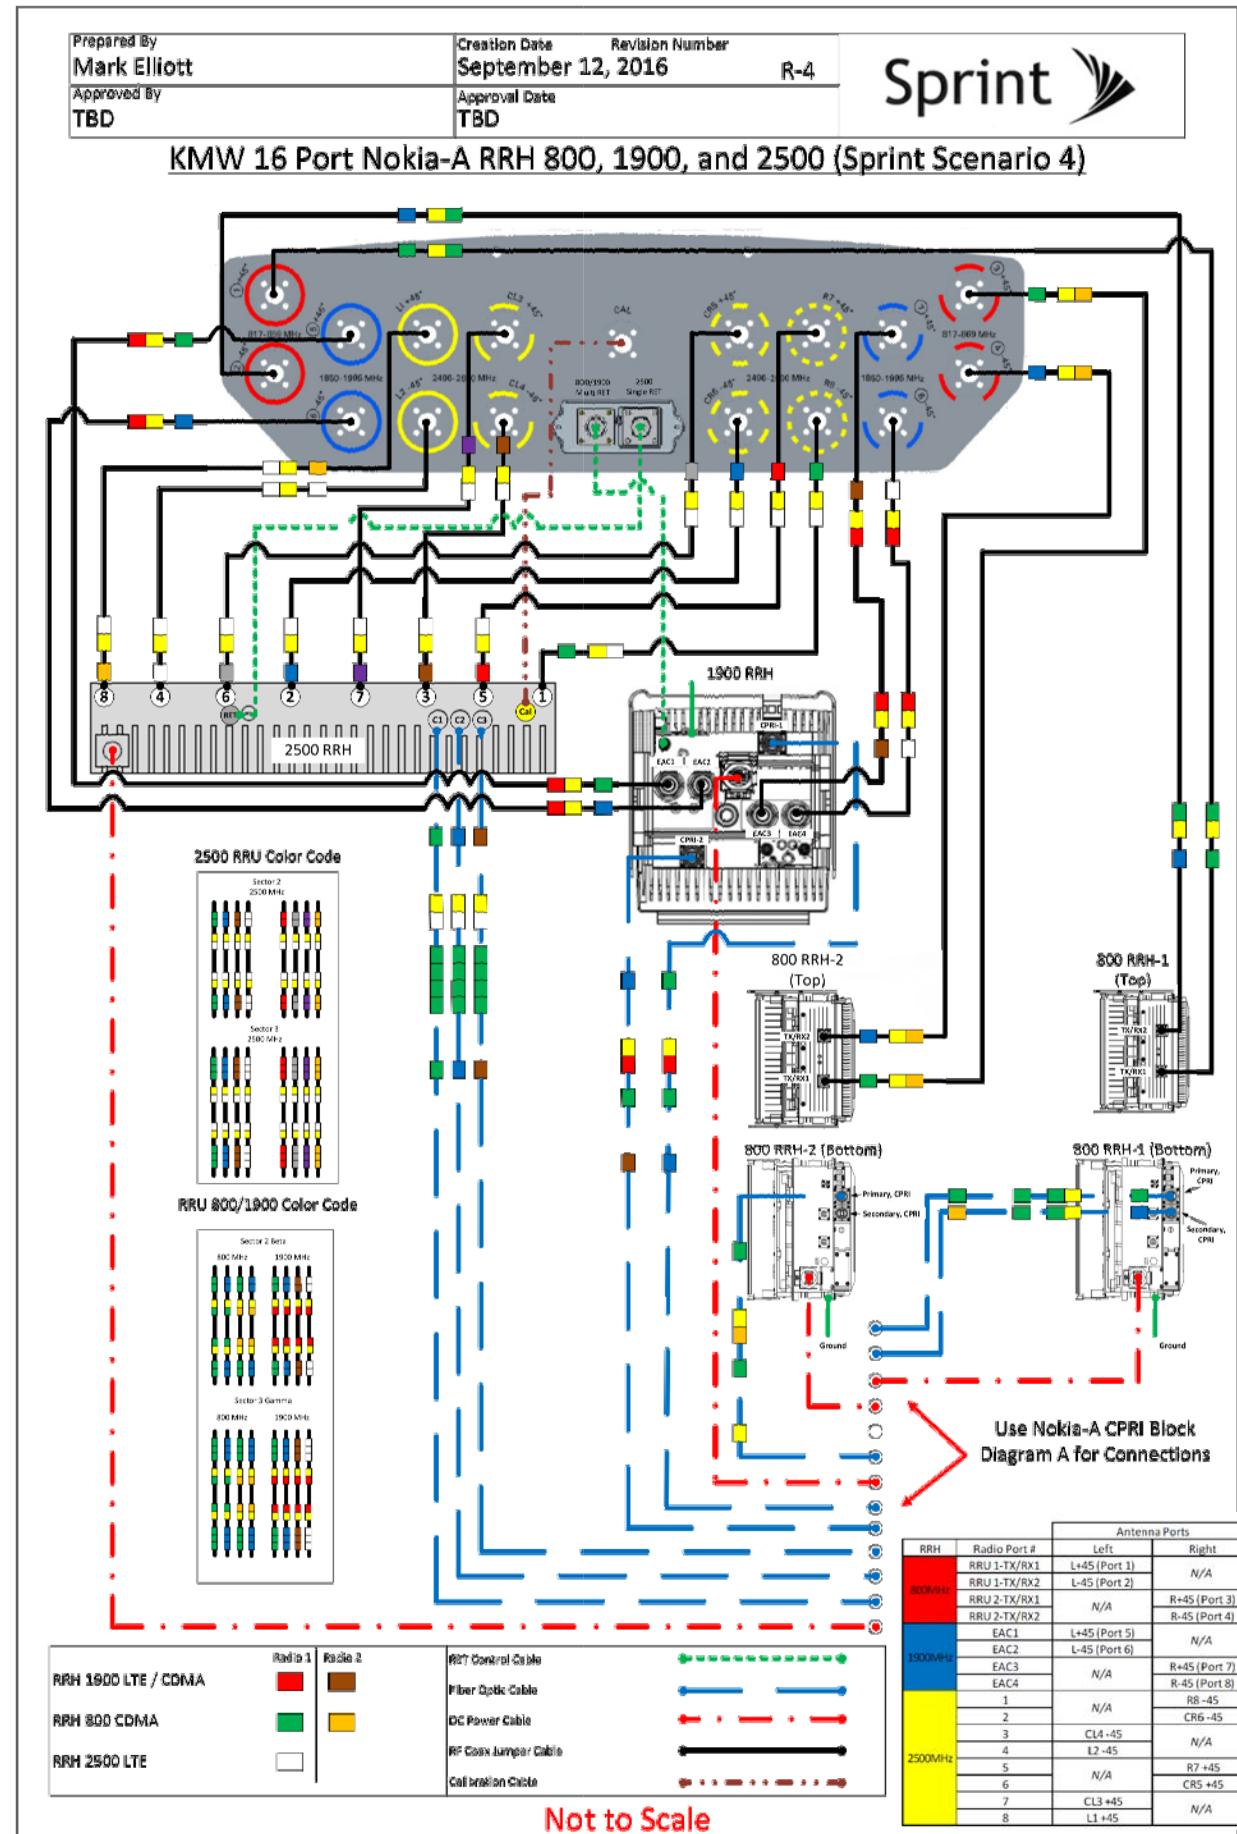


Sector	Cable	First Ring	Second Ring	Third Ring
1 Alpha	1	Green	No Tape	No Tape
1	2	Blue	No Tape	No Tape
1	3	Brown	No Tape	No Tape
1	4	White	No Tape	No Tape
1	5	Red	No Tape	No Tape
1	6	Gray	No Tape	No Tape
1	7	Purple	No Tape	No Tape
1	8	Orange	No Tape	No Tape
2 Beta	1	Green	Green	No Tape
2	2	Blue	Blue	No Tape
2	3	Brown	Brown	No Tape
2	4	White	White	No Tape
2	5	Red	Red	No Tape
2	6	Gray	Gray	No Tape
2	7	Purple	Purple	No Tape
2	8	Orange	Orange	No Tape
3 Gamma	1	Green	Green	Green
3	2	Blue	Blue	Blue
3	3	Brown	Brown	Brown
3	4	White	White	White
3	5	Red	Red	Red
3	6	Gray	Gray	Gray

Future

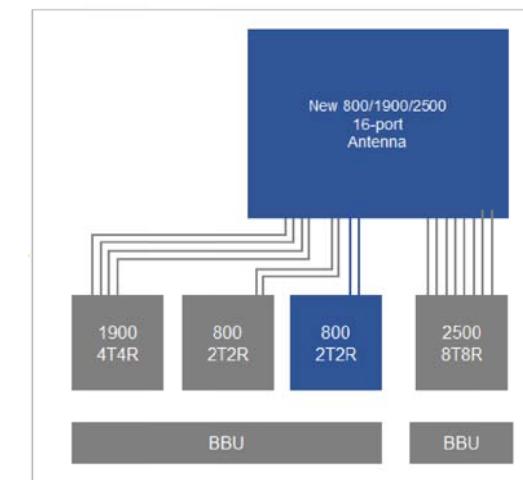

CPRI Block Connections for Sprint Scenario 4

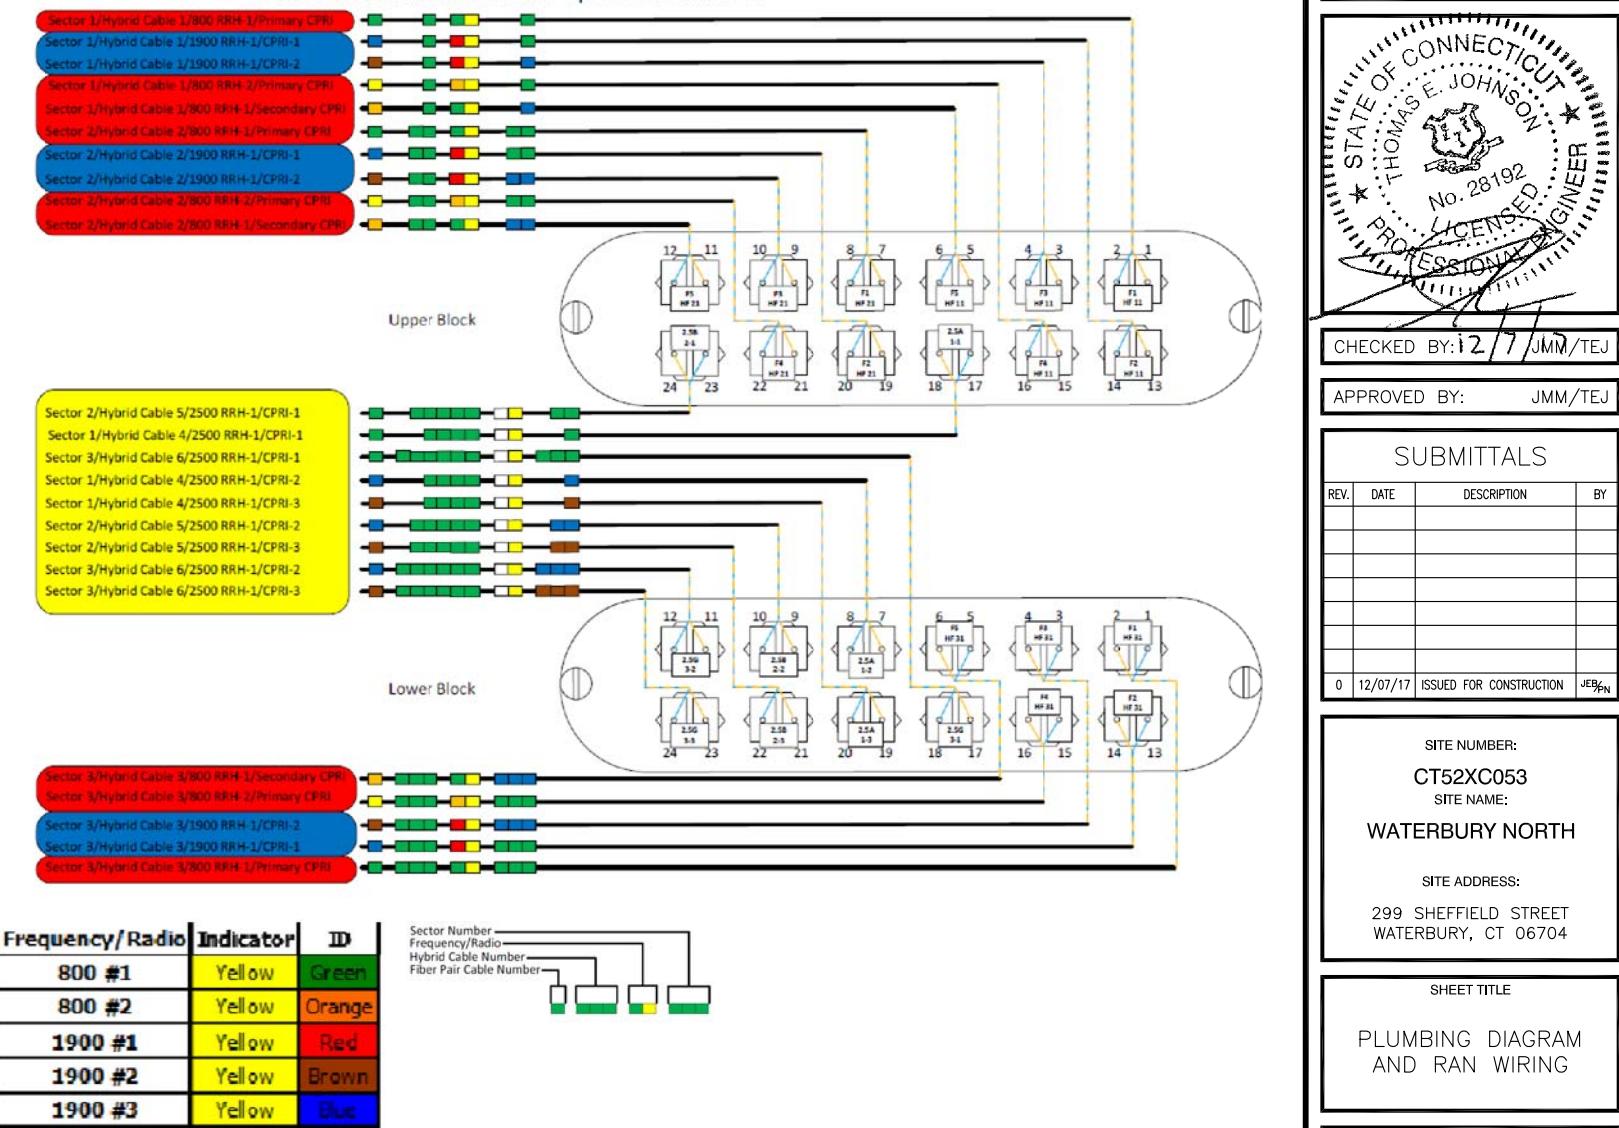

CHECKED BY: 12/7/JMM/TEJ
APPROVED BY: JMM/TEJ

SUBMITTALS		
REV.	DATE	DESCRIPTION BY
0	12/07/17	ISSUED FOR CONSTRUCTION JEB/PN

SITE NUMBER:
CT52X053
SITE NAME:
WATERBURY NORTH

SITE ADDRESS:
299 SHEFFIELD STREET
WATERBURY, CT 06704

SHEET TITLE
PLUMBING DIAGRAM
AND RAN WIRING

SHEET NUMBER
RF-2