



STATE OF CONNECTICUT

CONNECTICUT SITING COUNCIL

Ten Franklin Square, New Britain, CT 06051

Phone: (860) 827-2935 Fax: (860) 827-2950

E-Mail: siting.council@ct.gov

www.ct.gov/csc

VIA ELECTRONIC MAIL

May 14, 2019

Anne Marie Zsamba
Real Estate Specialist
Crown Castle
3 Corporate Park Drive, Suite 101
Clifton Park, NY 12065

RE: **EM-AT&T-168-190426** - AT&T notice of intent to modify an existing telecommunications facility located at 202 Great Hollow Road, Woodbury, Connecticut

Dear Ms. Zsamba:

The Connecticut Siting Council (Council) is in receipt of your correspondence of May 13, 2019 submitted in response to the Council's May 9, 2019 notification of an incomplete request for exempt modification with regard to the above-referenced matter.

The submission renders the request for exempt modification complete and the Council will process the request in accordance with the Federal Communications Commission 60-day timeframe.

Thank you for your attention and cooperation.

Sincerely,

A handwritten signature in black ink, appearing to read "Melanie A. Bachman".

Melanie A. Bachman
Executive Director

MAB/IN/emr



From: Zsamba, Anne Marie [mailto:AnneMarie.Zsamba@crowncastle.com]
Sent: Monday, May 13, 2019 10:21 AM
To: Robidoux, Evan
Cc: CSC-DL Siting Council
Subject: RE: Council Incomplete Letter for EM-AT&T-168-190426-GreatHollowRd-Woodbury

Good morning,

in response to the Council's notice of incomplete letter dated 5/9/19, attached please find constructions drawings which reflect the stamp seal and signature of a Connecticut PE.

Please advise as to whether or not hardcopy drawings should be remitted as the letter was silent on this matter. Thank you kindly.

ANNE MARIE ZSAMBA
Real Estate Specialist
T: (201) 236-9224
F: (724) 416-6112

CROWN CASTLE
3 Corporate Park Drive, Suite 101
Clifton Park, NY 12065
CrownCastle.com

From: Robidoux, Evan <Evan.Robidoux@ct.gov>
Sent: Friday, May 10, 2019 4:09 PM
To: Zsamba, Anne Marie <AnneMarie.Zsamba@crowncastle.com>
Cc: CSC-DL Siting Council <Siting.Council@ct.gov>
Subject: Council Incomplete Letter for EM-AT&T-168-190426-GreatHollowRd-Woodbury

CAUTION: This email originated from outside of the organization. Do not click links or open attachments unless you recognize the sender and know the content is safe.

Please see the attached correspondence.

Evan Robidoux
Clerk Typist
Connecticut Siting Council
10 Franklin Square
New Britain, CT 06051

This email may contain confidential or privileged material. Use or disclosure of it by anyone other than the recipient is unauthorized. If you are not an intended recipient, please delete this email.

PROJECT INFORMATION

SCOPE OF WORK:

ITEMS TO BE REMOVED FROM EXISTING TOWER & ON GROUND:

- REMOVE (3) EXISTING ANTENNAS & (6) RRR's.
- INSTALL AT&T ANTENNA (800-10964) (BETA & GAMMA SECTORS ONLY, TOTAL OF 4).
- INSTALL AT&T ANTENNA (800-10965) (ALPHA SECTOR, TOTAL OF 2).
- INSTALL AT&T 4478 B14 (700) (TYP. OF 1 PER SECTOR, TOTAL OF 3).
- INSTALL AT&T 4449 B5/B12 (850/700) (TYP. OF 1 PER SECTOR, TOTAL OF 3).
- INSTALL AT&T 8843 B2/B66A (PCS/AWS) (TYP. OF 1 PER SECTOR, TOTAL OF 3).
- INSTALL SURGE ARRESTOR (DC6-48-60-18-8F) (TOTAL OF 1).
- INSTALL (2) DC TRUNK CABLES & (1) FIBER TRUNK CABLE.

ITEMS TO BE MOUNTED INSIDE EXISTING SHELTER:

- ADD 2x6630.

ITEMS TO REMAIN:

- (6) ANTENNAS, (3) RRU'S, (3) TMAS, (1) SURGE SUPPRESSOR, (12) COAX CABLES, (1) FIBER TRUNK CABLE & (2) DC TRUNK CABLES.

SITE ADDRESS: GREAT HOLLOW ROAD
WOODBURY, CT 06798

LATITUDE (NAD 83): N 41° 31' 19.20"

LONGITUDE (NAD 83): W 73° 13' 14.65"

LANDLORD: CROWN CASTLE INTERNATIONAL
500 W. CUMMINGS PARK, STE 3600
WOBURN, MA 01801

TYPE OF SITE: MONOPOLE/INDOOR

TOWER HEIGHT: 139'

RAD CENTER: 139'


CURRENT USE: TELECOMMUNICATIONS FACILITY

PROPOSED USE: TELECOMMUNICATIONS FACILITY



NOTE:

ALL CONSTRUCTION ACTIVITIES ARE TO BE COMPLETED DIRECTLY THROUGH CROWN. CONTRACTOR MUST HAVE CONSTRUCTION PO AND NTP FROM CROWN DIRECT IN ORDER TO BEGIN. PRE-APPROVAL TO ENTER THE PROPERTY MUST BE OBTAINED. FOR ACCESS AUTHORIZATION, PLEASE CONTACT CROWN.



SITE NUMBER: CT2066

FA LOCATION CODE: 10035444

SITE NAME: WOODBURY CT GEART HOLLOW RD

CROWN SITE NAME: O&G WOODBURY

PROJECT: LTE 4C/LTE 5C/LTE 6C/4TX4RX SOFTWARE

RETROFIT/4TX4RX SOFTWARE RETROFIT

PACE ID: MRCTB035183, MRCTB035181, MRCTB035264,
MRCTB035351, MRCTB035348


BU#: 876380



DRAWING INDEX

SHEET NO:	SHEET TITLE
T-1	TITLE SHEET
GN-1	GENERAL NOTES I
GN-2	GENERAL NOTES II
C-1	SITE PLAN
C-2	EQUIPMENT LAYOUT & PROPOSED TOWER ELEVATION
C-3	EXISTING & PROPOSED ANTENNA LAYOUT
C-4	EQUIPMENT DETAILS
RF-1	ANTENNA CHART & RF EQUIPMENT SCHEMATIC
G-1	GROUNDING DETAILS

VICINITY MAP

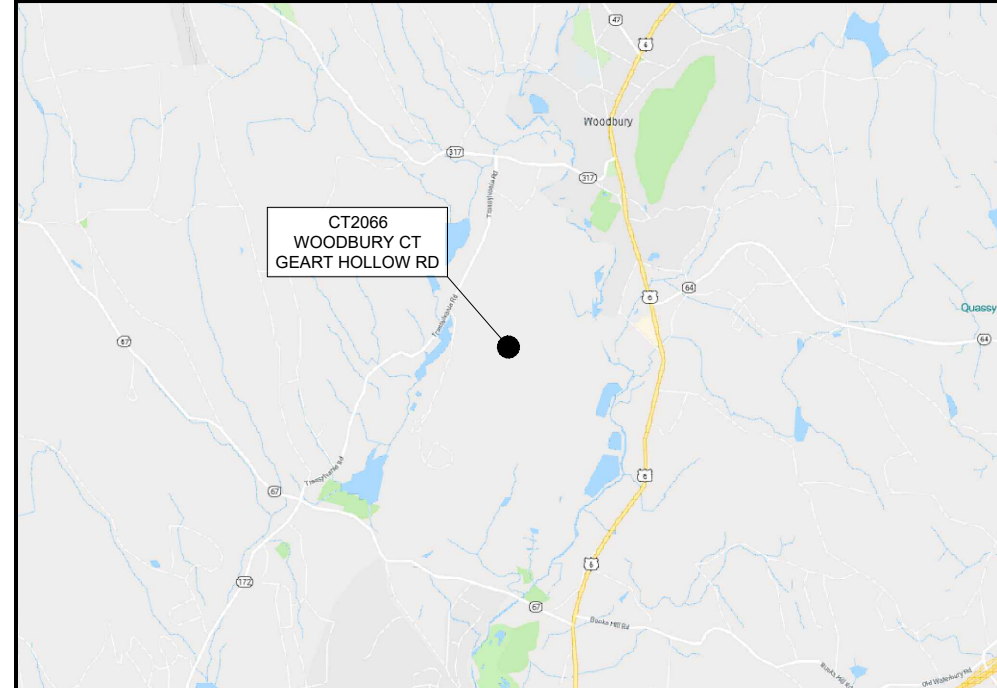

DIRECTIONS: FROM ROCKY HILL, TAKE 91 SOUTH TO I-691 WEST, FOLLOW 691 TO ROUTE 84 WEST. TAKE EXIT 15 (SOUTHBURY). TURN RIGHT AT END OF RAMP AND FOLLOW ROUTE 6 NORTH APPROX 4 1/2 MILES. TAKE LEFT ONTO ROUTE 317 AND GO APPROX 1/2 MI. TURN LEFT ONTO BEAR HILL RD. TAKE LEFT ONTO GREAT HOLLOW ROAD, FOLLOW TO THE END. WE HAVE A SHARED DRIVEWAY WITH HOUSE #208 ON THE RIGHT SIDE AT THE END OF GREAT HOLLOW RD. SITE IS APPROX 1/4 MILE UP ACCESS RD.

GENERAL NOTES

1. THE FACILITY IS AN UNMANNED PRIVATE AND SECURED EQUIPMENT INSTALLATION. IT IS ONLY ACCESSED BY TRAINED TECHNICIANS FOR PERIODIC ROUTINE MAINTENANCE AND THEREFORE DOES NOT REQUIRE ANY WATER OR SANITARY SEWER SERVICE. THE FACILITY IS NOT GOVERNED BY REGULATIONS REQUIRING PUBLIC ACCESS PER ADA REQUIREMENTS.
2. CONTRACTOR SHALL VERIFY ALL PLANS AND EXISTING DIMENSIONS AND CONDITIONS ON THE JOB SITE AND SHALL IMMEDIATELY NOTIFY THE AT&T REPRESENTATIVE IN WRITING OF DISCREPANCIES BEFORE PROCEEDING WITH THE WORK OR BE RESPONSIBLE FOR SAME.

CROWN CASTLE SITE ID #: 876380
CROWN CASTLE SITE NAME: O&G WOODBURY

ENGINEERING

2018 CONNECTICUT STATE BUILDING CODE
2018 AMENDMENT WITH 2015 INTERNATIONAL BUILDING CODE
2009 ICC/ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES
2015 INTERNATIONAL MECHANICAL CODE
2015 INTERNATIONAL ENERGY CONSERVATION CODE
2017 NATIONAL ELECTRICAL CODE (NFPA 70 2017)
ANSI/TIA-222-G



UNDERGROUND SERVICE ALERT
CONNECTICUT LAW REQUIRES TWO WORKING DAYS NOTICE PRIOR TO ANY EARTH MOVING ACTIVITIES BY CALLING 800-922-4455 OR DIAL 811

PROJECT NO: ERCC0004

DRAWN BY: DAP

CHECKED BY: CAT

SUBMITTALS

NO.	DATE	DESCRIPTION
0	04/22/19	ISSUED FOR PERMITTING

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF AT&T WIRELESS. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

FA# 10035444
SITE# CT2066
WOODBURY CT GEART
HOLLOW RD
GREAT HOLLOW ROAD
WOODBURY, CT 06798

TITLE SHEET

T-1

PART 1 - GENERAL

- 1.1 GENERAL CONDITIONS:
 - A. CONTRACTOR SHALL INSPECT THE EXISTING SITE CONDITIONS PRIOR TO SUBMITTING BID. ANY QUESTIONS ARISING DURING THE BID PERIOD IN REGARDS TO THE CONTRACTORS FUNCTIONS, THE SCOPE OF WORK, OR ANY OTHER ISSUE RELATED TO THIS PROJECT SHALL BE BROUGHT UP DURING THE BID PERIOD WITH THE PROJECT MANAGER FOR CLARIFICATION. NOT AFTER THE CONTRACT HAS BEEN AWARDED.
 - B. THE CONTRACTOR SHALL OBTAIN PERMITS, LICENSES, MAKE ALL DEPOSITS, AND PAY ALL FEES REQUIRED FOR THE CONSTRUCTION PERFORMANCE FOR THE WORK UNDER THIS SECTION.
 - C. DRAWINGS SHOW THE GENERAL ARRANGEMENT OF ALL SYSTEMS AND COMPONENTS COVERED UNDER THIS SECTION. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS. DRAWING SHALL NOT BE SCALED TO DETERMINE DIMENSIONS.
- 1.2 LAWS, REGULATIONS, ORDINANCES, STATUTES AND CODES.
 - A. ALL WORK SHALL BE INSTALLED IN ACCORDANCE WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE, AND ALL APPLICABLE LOCAL LAWS, REGULATIONS, ORDINANCES, STATUTES AND CODES. CONDUIT BENDS SHALL BE THE RADIUS BEND FOR THE TRADE SIZE OF CONDUIT IN COMPLIANCE WITH THE LATEST EDITIONS OF NEC.
- 1.3 REFERENCES:
 - A. THE PUBLICATIONS LISTED BELOW ARE PART OF THIS SPECIFICATION. EACH PUBLICATION SHALL BE THE LATEST REVISION AND ADDENDUM IN EFFECT ON THE DATE. THIS SPECIFICATION IS ISSUED FOR CONSTRUCTION UNLESS OTHERWISE NOTED. EXCEPT AS MODIFIED BY THE REQUIREMENT SPECIFIED HEREIN OR THE DETAILS OF THE DRAWINGS, WORK INCLUDED IN THIS SPECIFICATION SHALL CONFORM TO THE APPLICABLE PROVISION OF THESE PUBLICATIONS.
 1. ANSI/IEEE (AMERICAN NATIONAL STANDARDS INSTITUTE)
 2. ASTM (AMERICAN SOCIETY FOR TESTING AND MATERIALS)
 3. ICEA (INSULATED CABLE ENGINEERS ASSOCIATION)
 4. NEMA (NATIONAL ELECTRICAL MANUFACTURER'S ASSOCIATION)
 5. NFPA (NATIONAL FIRE PROTECTION ASSOCIATION)
 6. OSHA (OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION)
 7. UL (UNDERWRITERS LABORATORIES INC.)
 8. AT&T GROUNDING AND BONDING STANDARDS TP-76416
- 1.4 SCOPE OF WORK
 - A. WORK UNDER THIS SECTION SHALL CONSIST OF FURNISHING ALL LABOR, MATERIAL, AND ASSOCIATED SERVICES REQUIRED TO COMPLETE REQUIRED CONSTRUCTION AND BE OPERATIONAL.
 - B. ALL ELECTRICAL EQUIPMENT UNDER THIS CONTRACT SHALL BE PROPERLY TESTED, ADJUSTED, AND ALIGNED BY THE CONTRACTOR.
 - C. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL EXCAVATING, DRAINING, TRENCHES, BACKFILLING, AND REMOVAL OF EXCESS DIRT.
 - D. THE CONTRACTOR SHALL FURNISH TO THE OWNER WITH CERTIFICATES OF A FINAL INSPECTION AND APPROVAL FROM THE INSPECTION AUTHORITIES HAVING JURISDICTION.
 - E. THE CONTRACTOR SHALL PREPARE A COMPLETE SET OF AS-BUILT DRAWINGS. DOCUMENT ALL WIRING EQUIPMENT CONDITIONS, AND CHANGES WHILE COMPLETING THIS CONTRACT. THE AS-BUILT DRAWINGS SHALL BE SUBMITTED AT COMPLETION OF THE PROJECT.

PART 2 - PRODUCTS

- 2.1 GENERAL:
 - A. ALL MATERIALS AND EQUIPMENT SHALL BE UL LISTED, NEW, AND FREE FROM DEFECTS.
 - B. ALL ITEMS OF MATERIALS AND EQUIPMENT SHALL BE ACCEPTABLE TO THE AUTHORITY HAVING JURISDICTION AS SUITABLE FOR THE USE INTENDED.
 - C. ALL EQUIPMENT SHALL BEAR THE UNDERWRITERS LABORATORIES LABEL OF APPROVAL, AND SHALL CONFORM TO REQUIREMENT OF THE NATIONAL ELECTRICAL CODE.
 - D. ALL OVERCURRENT DEVICES SHALL HAVE AN INTERRUPTING CURRENT RATING THAT SHALL BE GREATER THAN THE SHORT CIRCUIT CURRENT TO WHICH THEY ARE SUBJECTED, 10,000 AIC MINIMUM. VERIFY AVAILABLE SHORT CIRCUIT CURRENT DOES NOT EXCEED THE RATING OF ELECTRICAL EQUIPMENT IN ACCORDANCE WITH ARTICLE 110.24 NEC OR THE MOST CURRENT ADOPTED CODE PER THE GOVERNING JURISDICTION.
- 2.2 MATERIALS AND EQUIPMENT:
 - A. CONDUIT:
 1. RIGID METAL CONDUIT (RMC) SHALL BE HOT-DIPPED GALVANIZED INSIDE AND OUTSIDE INCLUDING ENDS AND THREADS AND ENAMELED OR LACQUERED INSIDE IN ADDITION TO GALVANIZING.
 2. LIQUIDTIGHT FLEXIBLE METAL CONDUIT SHALL BE UL LISTED.
 3. CONDUIT CLAMPS, STRAPS AND SUPPORTS SHALL BE STEEL OR MALLEABLE IRON. ALL FITTINGS SHALL BE COMPRESSION AND CONCRETE TIGHT TYPE. GROUNDING BUSHINGS WITH INSULATED THROATS SHALL BE INSTALLED ON ALL CONDUIT TERMINATIONS.
 4. NONMETALLIC CONDUIT AND FITTINGS SHALL BE SCHEDULE 40 PVC. INSTALL USING SOLVENT-CEMENT-TYPE JOINTS AS RECOMMENDED BY THE MANUFACTURER.
 - B. CONDUCTORS AND CABLE:
 1. CONDUCTORS AND CABLE SHALL BE FLAME-RETARDANT, MOISTURE AND HEAT RESISTANT THERMOPLASTIC, SINGLE CONDUCTOR, COPPER, TYPE THHN/THWN-2, 600 VOLT, SIZE AS INDICATED, #12 AWG SHALL BE THE MINIMUM SIZE CONDUCTOR USED.
 2. #10 AWG AND SMALLER CONDUCTOR SHALL BE SOLID OR STRANDED AND #8 AWG AND LARGER CONDUCTORS SHALL BE STRANDED.
 3. SOLDERLESS, COMPRESSION-TYPE CONNECTORS SHALL BE USED FOR TERMINATION OF ALL STRANDED CONDUCTORS.
 4. STRAIN-RELIEF SUPPORTS GRIPS SHALL BE HUBBELL KELLEMS OR APPROVED EQUAL. CABLES SHALL BE SUPPORTED IN ACCORDANCE WITH THE NEC AND CABLE MANUFACTURER'S RECOMMENDATIONS.
 5. ALL CONDUCTORS SHALL BE TAGGED AT BOTH ENDS OF THE CONDUCTOR, AT ALL PULL BOXES, J-BOXES, EQUIPMENT AND CABINETS AND SHALL BE IDENTIFIED WITH APPROVED PLASTIC TAGS (ACTION CRAFT, BRADY, OR APPROVED EQUAL).
 - C. DISCONNECT SWITCHES:
 1. DISCONNECT SWITCHES SHALL BE HEAVY DUTY, DEAD-FRONT, QUICK-MAKE, QUICK-BREAK, EXTERNALLY OPERABLE, HANDLE LOCKABLE AND INTERLOCK WITH COVER IN CLOSED POSITION, RATING AS INDICATED, UL LABELED FURNISHED IN NEMA 3R ENCLOSURE, SQUARE-D OR ENGINEER APPROVED EQUAL.
 - D. CHEMICAL ELECTROLYTIC GROUNDING SYSTEM:
 1. INSTALL CHEMICAL GROUNDING AS REQUIRED. THE SYSTEM SHALL BE ELECTROLYTIC MAINTENANCE FREE ELECTRODE CONSISTING OF RODS WITH A MINIMUM #2 AWG CU EXOTHERMICALLY WELDED PIGTAIL, PROTECTIVE BOXES, AND BACKFILL MATERIAL. MANUFACTURER SHALL BE LYNCOLE XIT GROUNDING ROD TYPES K2-(*)CS OR K2L-(*)CS (*) LENGTH AS REQUIRED.
 2. GROUND ACCESS BOX SHALL BE A POLYPLASTIC BOX FOR NON-TRAFFIC APPLICATIONS, INCLUDING BOLT DOWN FLUSH COVER WITH "BREATHER" HOLES, XIT MODEL #XB-22. ALL DISCONNECT SWITCHES AND CONTROLLING DEVICES SHALL BE PROVIDED WITH ENGRAVED LAMICOID NAMEPLATES INDICATING EQUIPMENT CONTROLLED, BRANCH CIRCUITS ID

- NUMBERING, AND THE ELECTRICAL POWER SOURCE.
- 3. BACKFILL MATERIAL SHALL BE LYNCONITE AND LYNCOLE GROUNDING GRAVEL.
- E. SYSTEM GROUNDING:
 1. ALL GROUNDING COMPONENTS SHALL BE TINNED AND GROUNDING CONDUCTOR SHALL BE #2 AWG BARE, SOLID, TINNED, COPPER. ABOVE GRADE GROUNDING CONDUCTORS SHALL BE INSULATED WHERE NOTED.
 2. GROUNDING BUSES SHALL BE BARE, TINNED, ANNEALED COPPER BARS OF RECTANGULAR CROSS SECTION. STANDARD BUS BARS MGB, SHALL BE FURNISHED AND INSTALLED BY THE CONTRACTOR. THEY SHALL NOT BE FABRICATED OR MODIFIED IN THE FIELD. ALL GROUNDING BUSES SHALL BE IDENTIFIED WITH MINIMUM 3/4" LETTERS BY WAY OF STENCILING OR DESIGNATION PLATE.
 3. CONNECTORS SHALL BE HIGH-CONDUCTIVITY, HEAVY DUTY, LISTED AND LABELED AS GROUNDING CONNECTORS FOR THE MATERIALS USED. USE TWO-HOLE COMPRESSION LUGS WITH HEAT SHRINK FOR MECHANICAL CONNECTIONS, INTERIOR CONNECTIONS USE TWO-HOLE COMPRESSION LUGS WITH INSPECTION WINDOW AND CLEAR HEAT SHRINK.
 4. EXOTHERMIC WELDED CONNECTIONS SHALL BE PROVIDED IN KIT FORM AND SELECTED FOR THE SPECIFIC TYPES, SIZES, AND COMBINATIONS OF CONDUCTORS AND OTHER ITEMS TO BE CONNECTED.
 5. GROUND RODS SHALL BE COPPER-CLAD STEEL WITH HIGH-STRENGTH STEEL CORE AND ELECTROLYTIC-GRADE COPPER OUTER SHEATH, MOLTEM WELDED TO CORE, 5/8"x10'-0". ALL GROUNDING RODS SHALL BE INSTALLED WITH INSPECTION SLEEVES.
 6. INSTALL AN EQUIPMENT GROUNDING CONDUCTOR IN ALL CONDUITS IN COMPLIANCE WITH THE AT&T SPECIFICATIONS AND NEC. THE EQUIPMENT GROUNDING CONDUCTORS SHALL BE BONDED AT ALL JUNCTION BOXES, PULLBOXES, DISCONNECT SWITCHES, STARTERS, AND EQUIPMENT CABINETS.
- F. OTHER MATERIALS:
 6. THE CONTRACTOR SHALL PROVIDE OTHER MATERIALS, THOUGH NOT SPECIFICALLY DESCRIBED, WHICH ARE REQUIRED FOR A COMPLETELY OPERATIONAL SYSTEM AND PROPER INSTALLATION OF THE WORK.
 7. PROVIDE PULL BOXES AND JUNCTION BOXES WHERE SHOWN OR REQUIRED BY NEC.
- G. PANELS AND LOAD CENTERS:
 1. ALL PANEL DIRECTORIES SHALL BE TYPEWRITTEN.

PART 3 - EXECUTION

- 3.1 GENERAL:
 - A. ALL MATERIAL AND EQUIPMENT SHALL BE INSTALLED IN STRICT ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
 - B. EQUIPMENT SHALL BE TIGHTLY COVERED AND PROTECTED AGAINST DIRT OR WATER, AND AGAINST CHEMICAL OR MECHANICAL INJURY DURING INSTALLATION AND CONSTRUCTION PERIODS.
- 3.2 LABOR AND WORKMANSHIP:
 - A. ALL LABOR FOR THE INSTALLATION OF MATERIALS AND EQUIPMENT FURNISHED FOR THE ELECTRICAL SYSTEM SHALL BE INSTALLED BY EXPERIENCED WIREMEN, IN A NEAT AND WORKMAN-LIKE MANNER.
 - B. ALL ELECTRICAL EQUIPMENT SHALL BE ADJUSTED, ALIGNED AND TESTED BY THE CONTRACTOR AS REQUIRED TO PRODUCE THE INTENDED PERFORMANCE.
 - C. UPON COMPLETION OF WORK, THE CONTRACTOR SHALL THOROUGHLY CLEAN ALL EXPOSED EQUIPMENT, REMOVE ALL LABELS AND ANY DEBRIS, CRATING OR CARTONS AND LEAVE THE INSTALLATION FINISHED AND READY FOR OPERATION.
- 3.3 COORDINATION:
 - A. THE CONTRACTOR SHALL COORDINATE THE INSTALLATION OF ELECTRICAL ITEMS WITH THE OWNER-FURNISHED EQUIPMENT DELIVERY SCHEDULE TO PREVENT UNNECESSARY DELAYS IN THE TOTAL WORK.
- 3.4 INSTALLATION:
 - A. CONDUIT:
 1. ALL ELECTRICAL WIRING SHALL BE INSTALLED IN CONDUIT AS SPECIFIED. NO CONDUIT OR TUBING OF LESS THAN 3/4 INCH TRADE SIZE.
 2. PROVIDE RIGID PVC SCHEDULE 80 CONDUITS FOR ALL RISERS, RMC OTHERWISE NOTED. EMT MAY BE INSTALLED FOR EXTERIOR CONDUITS WHERE NOT SUBJECT TO PHYSICAL DAMAGE.
 3. INSTALL SCHEDULE 40 PVC CONDUIT WITH A MINIMUM COVER OF 24" UNDER ROADWAYS, PARKING LOTS, STREETS, AND ALLEYS. CONDUIT SHALL HAVE A MINIMUM COVER OF 18" IN ALL OTHER NON-TRAFFIC APPLICATIONS (REFER TO 2017 NEC, TABLE 300.5).
 4. USE GALVANIZED FLEXIBLE STEEL CONDUIT WHERE DIRECT CONNECTION TO EQUIPMENT WITH MOVEMENT, VIBRATION, OR FOR EASE OF MAINTENANCE. USE LIQUID TIGHT, FLEXIBLE METAL CONDUIT FOR OUTDOOR APPLICATIONS. INSTALL GALVANIZED FLEXIBLE STEEL CONDUIT AT ALL POINTS OF CONNECTION TO EQUIPMENT MOUNTED ON SUPPORT TO ALLOW FOR EXPANSION AND CONTRACTION.
 5. A RUN OF CONDUIT BETWEEN BOXES OR EQUIPMENT SHALL NOT CONTAIN MORE THAN THE EQUIVALENT OF THREE QUARTER-BENDS. CONDUIT BEND SHALL BE MADE WITH THE UL LISTED BENDER OR FACTORY 90 DEGREE ELBOWS MAY BE USED.
 6. FIELD FABRICATED CONDUITS SHALL BE CUT SQUARE WITH A CONDUIT CUTTING TOOL AND REAMED TO PROVIDE A SMOOTH INSIDE SURFACE.
 7. PROVIDE INSULATED GROUNDING BUSHING FOR ALL CONDUITS.
 8. CONTRACTOR IS RESPONSIBLE FOR PROTECTING ALL CONDUITS DURING CONSTRUCTION. TEMPORARY OPENINGS IN THE CONDUIT SYSTEM SHALL BE PLUGGED OR CAPPED TO PREVENT ENTRANCE OF MOISTURE OR FOREIGN MATTER. CONTRACTOR SHALL REPLACE ANY CONDUITS CONTAINING FOREIGN MATERIALS THAT CANNOT BE REMOVED.
 9. ALL CONDUITS SHALL BE SWABBED CLEAN BY PULLING AN APPROPRIATE SIZE MANDREL THROUGH THE CONDUIT BEFORE INSTALLATION OF CONDUCTORS OR CABLES. CONDUIT SHALL BE FREE OF DIRT AND DEBRIS.
 10. INSTALL PULL STRINGS IN ALL CLEAN EMPTY CONDUITS. IDENTIFY PULL STRINGS AT EACH END.
 11. INSTALL 2" HIGHLY VISIBLE AND DETECTABLE TAPE 12" ABOVE ALL UNDERGROUND CONDUITS AND CONDUCTORS.
 12. CONDUITS SHALL BE INSTALLED IN SUCH A MANNER AS TO INSURE AGAINST COLLECTION OF TRAPPED CONDENSATION.
 13. PROVIDE CORE DRILLING AS NECESSARY FOR PENETRATIONS TO ALLOW FOR RACEWAYS AND CABLES TO BE ROUTED THROUGH THE BUILDING. DO NOT PENETRATE STRUCTURAL MEMBERS. SLEEVES AND/OR PENETRATIONS IN FIRE RATED CONSTRUCTION SHALL BE EFFECTIVELY SEALED WITH FIRE RATED MATERIAL WHICH SHALL MAINTAIN THE FIRE RATING OF THE WALL OR STRUCTURE. FIRE STOPS AT FLOOR PENETRATIONS SHALL PREVENT PASSAGE OF WATER, SMOKE, FIRE, AND FUMES. ALL MATERIAL SHALL BE UL APPROVED FOR THIS PURPOSE.
 - B. CONDUCTORS AND CABLE:
 1. ALL POWER WIRING SHALL BE COLOR CODED AS FOLLOWS:

DESCRIPTION	208/240/120 VOLT SYSTEMS
PHASE A	BLACK
PHASE B	RED
PHASE C	BLUE
NEUTRAL	WHITE
GROUNDING	GREEN
 2. SPLICES SHALL BE MADE ONLY AT OUTLETS, JUNCTION BOXES, OR ACCESSIBLE RACEWAY CONDUITS APPROVED FOR THIS PURPOSE.

- 3. PULLING LUBRICANTS SHALL BE UL APPROVED. CONTRACTOR SHALL USE NYLON OR HEMP ROPE FOR PULLING CONDUCTOR OR CABLES INTO THE CONDUIT.
- 4. CABLES SHALL BE NEATLY TRAINED, WITHOUT INTERLACING, AND BE OF SUFFICIENT LENGTH IN ALL BOXES & EQUIPMENT TO PERMIT MAKING A NEAT ARRANGEMENT. CABLES SHALL BE SECURED IN A MANNER TO AVOID TENSION ON CONDUCTORS OR TERMINALS. CONDUCTORS SHALL BE PROTECTED FROM MECHANICAL INJURY AND MOISTURE. SHARP BENDS OVER CONDUIT BUSHINGS IS PROHIBITED. DAMAGED CABLES SHALL BE REMOVED AND REPLACED AT THE CONTRACTOR'S EXPENSE.
- C. DISCONNECT SWITCHES:
 1. INSTALL DISCONNECT SWITCHES LEVEL AND PLUMB. CONNECT TO WIRING SYSTEM AND GROUNDING SYSTEM AS INDICATED.
- D. GROUNDING:
 1. ALL METALLIC PARTS OF ELECTRICAL EQUIPMENT WHICH DO NOT CARRY CURRENT SHALL BE GROUNDED IN ACCORDANCE WITH THE REQUIREMENTS OF THE BUILDING MANUFACTURER, AT&T GROUNDING AND BONDING STANDARDS TP-76416, ND-00135, AND THE NATIONAL ELECTRICAL CODE.
 2. PROVIDE ELECTRICAL GROUNDING AND BONDING SYSTEM INDICATED WITH ASSEMBLY OF MATERIALS, INCLUDING GROUNDING ELECTRODES, BONDING JUMPERS AND ADDITIONAL ACCESSORIES AS REQUIRED FOR A COMPLETE INSTALLATION.
 3. ALL GROUNDING CONDUCTORS SHALL PROVIDE A STRAIGHT DOWNWARD PATH TO GROUND WITH GRADUAL BEND AS REQUIRED. GROUNDING CONDUCTORS SHALL NOT BE LOOPED OR SHARPLY BENT. ROUTE GROUNDING CONNECTIONS AND CONDUCTORS TO GROUND IN THE SHORTEST AND STRAIGHTEST PATHS POSSIBLE TO MINIMIZE TRANSIENT VOLTAGE RISES.
 4. BUILDINGS AND/OR NEW TOWERS GREATER THAN 75 FEET IN HEIGHT AND WHERE THE MAIN GROUNDING CONDUCTORS ARE REQUIRED TO BE ROUTED TO GRADE, THE CONTRACTOR SHALL ROUTE TWO GROUNDING CONDUCTORS FROM THE ROOFTOP, TOWERS, AND WATER TOWERS GROUNDING RING, TO THE EXISTING GROUNDING SYSTEM. THE GROUNDING CONDUCTORS SHALL NOT BE SMALLER THAN 2/0 AWG COPPER. ROOFTOP GROUNDING RING SHALL BE BONDED TO THE EXISTING GROUNDING SYSTEM, THE BUILDING STEEL COLUMNS, LIGHTNING PROTECTION SYSTEM, AND BUILDING MAIN WATER LINE (FERROUS OR NONFERROUS METAL PIPING ONLY). SEE STANDARD 6.3.2.2.
 5. TIGHTEN GROUNDING AND BONDING CONNECTORS, INCLUDING SCREWS AND BOLTS, IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED TORQUE TIGHTENING VALUES FOR CONNECTORS AND BOLTS. WHERE MANUFACTURER'S TORQUING REQUIREMENTS ARE NOT AVAILABLE, TIGHTEN CONNECTIONS TO COMPLY WITH TIGHTENING TORQUE VALUES SPECIFIED IN UL TO ASSURE PERMANENT AND EFFECTIVE GROUNDING.
 6. CONTRACTOR SHALL VERIFY THE LOCATIONS OF GROUNDING TIE-IN-POINTS TO THE EXISTING GROUNDING SYSTEM. ALL UNDERGROUND GROUNDING CONNECTIONS SHALL BE MADE BY THE EXOTHERMIC WELD PROCESS AND INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.
 7. ALL GROUNDING CONNECTIONS SHALL BE INSPECTED FOR TIGHTNESS. EXOTHERMIC WELDED CONNECTIONS SHALL BE APPROVED BY THE INSPECTOR HAVING JURISDICTION BEFORE BEING PERMANENTLY CONCEALED.
 8. APPLY CORROSION-RESISTANT FINISH TO FIELD CONNECTIONS AND PLACES WHERE FACTORY APPLIED PROTECTIVE COATINGS HAVE BEEN DESTROYED. USE KOPR-SHIELD ANTI-OXIDATION COMPOUND ON ALL COMPRESSION GROUNDING CONNECTIONS.
 9. A SEPARATE, CONTINUOUS, INSULATED EQUIPMENT GROUNDING CONDUCTOR SHALL BE INSTALLED IN ALL FEEDER AND BRANCH CIRCUITS.
 10. BOND ALL INSULATED GROUNDING BUSHINGS WITH A BARE #6 AWG GROUNDING CONDUCTOR TO A GROUND BUS.
 11. DIRECT BURIED GROUNDING CONDUCTORS SHALL BE INSTALLED AT A NOMINAL DEPTH OF 36" MINIMUM BELOW GRADE, OR 6" BELOW THE FROST LINE, USE THE GREATER OF THE TWO DISTANCES.
 12. ALL GROUNDING CONDUCTORS EMBEDDED IN OR PENETRATING CONCRETE SHALL BE INSTALLED IN SCHEDULE 40 PVC CONDUIT.
 13. THE INSTALLATION OF CHEMICAL ELECTROLYTIC GROUNDING SYSTEM IN STRICT ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS. REMOVE SEALING TAPE FROM LEACHING AND BREATHER HOLES. INSTALL PROTECTIVE BOX FLUSH WITH GRADE.
 14. DRIVE GROUND RODS UNTIL TOPS ARE A MINIMUM DISTANCE OF 36" DEPTH OR 6" BELOW FROST LINE, USING THE GREATER OF THE TWO DISTANCES.
 15. IF COAX ON THE ICE BRIDGE IS MORE THAN 6 FT. FROM THE GROUNDING BAR AT THE BASE OF THE TOWER, A SECOND GROUNDING BAR WILL BE NEEDED AT THE END OF THE ICE BRIDGE, TO GROUND THE COAX CABLE GROUNDING KITS AND IN-LINE ARRESTORS.
 16. CONTRACTOR SHALL REPAIR, AND/OR REPLACE, EXISTING GROUNDING SYSTEM COMPONENTS DAMAGED DURING CONSTRUCTION AT THE CONTRACTORS EXPENSE.
- 3.5 ACCEPTANCE TESTING:
 - A. CERTIFIED PERSONNEL USING CERTIFIED EQUIPMENT SHALL PERFORM REQUIRED TESTS AND SUBMIT WRITTEN TEST REPORTS UPON COMPLETION.
 - B. WHEN MATERIAL AND/OR WORKMANSHIP IS FOUND NOT TO COMPLY WITH THE SPECIFIED REQUIREMENTS, THE NON-COMPLYING ITEMS SHALL BE REMOVED FROM THE PROJECT SITE AND REPLACED WITH ITEMS COMPLYING WITH THE SPECIFIED REQUIREMENTS PROMPTLY AFTER RECEIPT OF NOTICE FOR NON-COMPLIANCE.
 - C. TEST PROCEDURES:
 1. ALL FEEDERS SHALL HAVE INSULATION TESTED AFTER INSTALLATION, BEFORE CONNECTION TO DEVICES. THE CONDUCTORS SHALL TEST FREE FROM SHORT CIRCUITS AND GROUNDS. TESTING SHALL BE FOR ONE MINUTE USING 1000V DC. PROVIDE WRITTEN DOCUMENTATION FOR ALL TEST RESULTS.
 2. PRIOR TO ENERGIZING CIRCUITRY, TEST WIRING DEVICES FOR ELECTRICAL CONTINUITY AND PROPER POLARITY CONNECTIONS.
 3. MEASURE AND RECORD VOLTAGES BETWEEN PHASES AND BETWEEN PHASE CONDUCTORS AND NEUTRALS. SUBMIT A REPORT OF MAXIMUM AND MINIMUM VOLTAGES.
 4. PERFORM GROUNDING TEST TO MEASURE GROUNDING RESISTANCE OF GROUNDING SYSTEM USING THE IEEE STANDARD 3-POINT "FALL-OF-POTENTIAL" METHOD. PROVIDE PLOTTED TEST VALUES AND LOCATION SKETCH. NOTIFY THE ENGINEER IMMEDIATELY IF MEASURED VALUE IS OVER 5 OHMS.



5841 BRIDGE STREET
EAST SYRACUSE, NY 13057



3 CORPORATE PARK DRIVE
SUITE 101
CLIFTON PARK, NY 12065



120 ST. JAMES AVENUE, 5TH FLOOR
BOSTON, MA 02116



PROJECT NO: ERCC0004

DRAWN BY: DAP

CHECKED BY: CAT

SUBMITTALS		
NO.	DATE	DESCRIPTION
0	04/22/19	ISSUED FOR PERMITTING

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF AT&T WIRELESS, ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

FA# 10035444
SITE# CT2066
WOODBURY CT GEART
HOLLOW RD
GREAT HOLLOW ROAD
WOODBURY, CT 06798

GENERAL NOTES I

GN-1

ANTENNA MOUNTING

- DESIGN AND CONSTRUCTION OF ANTENNA SUPPORTS SHALL CONFORM TO CURRENT ANS/ITIA-222 OR APPLICABLE LOCAL CODES.
- ALL STEEL MATERIALS SHALL BE GALVANIZED AFTER FABRICATION IN ACCORDANCE WITH ASTM A123 "ZINC (HOT-DIP GALVANIZED) COATINGS ON IRON AND STEEL PRODUCTS", UNLESS NOTED OTHERWISE.
- ALL BOLTS, ANCHORS AND MISCELLANEOUS HARDWARE SHALL BE GALVANIZED IN ACCORDANCE WITH ASTM A153 "ZINC-COATING (HOT-DIP) ON IRON AND STEEL HARDWARE", UNLESS NOTED OTHERWISE.
- DAMAGED GALVANIZED SURFACES SHALL BE REPAIRED BY COLD GALVANIZING IN ACCORDANCE WITH ASTM A780.
- ALL ANTENNA MOUNTS SHALL BE INSTALLED WITH LOCK NUTS, DOUBLE NUTS AND SHALL BE TORQUED TO MANUFACTURER'S RECOMMENDATIONS.
- CONTRACTOR SHALL INSTALL ANTENNA PER MANUFACTURER'S RECOMMENDATION FOR INSTALLATION AND GROUNDING.
- ALL UNUSED PORTS ON ANY ANTENNAS SHALL BE TERMINATED WITH A 50-OHM LOAD TO ENSURE ANTENNAS PERFORM AS DESIGNED.
- PRIOR TO SETTING ANTENNA AZIMUTHS AND DOWNTILTS, ANTENNA CONTRACTOR SHALL CHECK THE ANTENNA MOUNT FOR TIGHTNESS AND ENSURE THAT THEY ARE PLUMB. ANTENNA AZIMUTHS SHALL BE SET FROM TRUE NORTH AND BE ORIENTED WITHIN +/- 5% AS DEFINED BY THE RFDS. ANTENNA DOWNTILTS SHALL BE WITHIN +/- 0.5% AS DEFINED BY THE RFDS. REFER TO ND-00246.
- JUMPERS FROM THE TMA'S MUST TERMINATE TO OPPOSITE POLARIZATION'S IN EACH SECTOR.
- CONTRACTOR SHALL RECORD THE SERIAL #, SECTOR, AND POSITION OF EACH ACTUATOR INSTALLED AT THE ANTENNAS AND PROVIDE THE INFORMATION TO AT&T.
- TMA'S SHALL BE MOUNTED ON PIPE DIRECTLY BEHIND ANTENNAS AS CLOSE TO ANTENNA AS FEASIBLE IN A VERTICAL POSITION.

TORQUE REQUIREMENTS

- ALL RF CONNECTIONS SHALL BE TIGHTENED BY A TORQUE WRENCH.
- ALL RF CONNECTIONS, GROUNDING HARDWARE AND ANTENNA HARDWARE SHALL HAVE A TORQUE MARK INSTALLED IN A CONTINUOUS STRAIGHT LINE FROM BOTH SIDES OF THE CONNECTION.
 - RF CONNECTION BOTH SIDES OF THE CONNECTOR.
 - GROUNDING AND ANTENNA HARDWARE ON THE NUT SIDE STARTING FROM THE THREADS TO THE SOLID SURFACE. EXAMPLE OF SOLID SURFACE: GROUND BAR, ANTENNA BRACKET METAL.
 - ALL 8M ANTENNA HARDWARE SHALL BE TIGHTENED TO 9 LB-FT (12 NM).
- ALL 12M ANTENNA HARDWARE SHALL BE TIGHTENED TO 43 LB-FT (58 NM).
- ALL GROUNDING HARDWARE SHALL BE TIGHTENED UNTIL THE LOCK WASHER COLLAPSES AND THE GROUNDING HARDWARE IS NO LONGER LOOSE.
- ALL DIN TYPE CONNECTIONS SHALL BE TIGHTENED TO 18-22 LB-FT (24.4 - 29.8 NM).
- ALL N TYPE CONNECTIONS SHALL BE TIGHTENED TO 15-20 LB-IN (1.7 - 2.3 NM).

FIBER & POWER CABLE MOUNTING

- THE FIBER OPTIC TRUNK CABLES SHALL BE INSTALLED INTO CONDUITS, CHANNEL CABLE TRAYS, OR CABLE TRAY. WHEN INSTALLING FIBER OPTIC TRUNK CABLES INTO A CABLE TRAY SYSTEM, THEY SHALL BE INSTALLED INTO AN INTER DUCT AND A PARTITION BARRIER SHALL BE INSTALLED BETWEEN THE 600 VOLT CABLES AND THE INTER DUCT IN ORDER TO SEGREGATE CABLE TYPES. OPTIC FIBER TRUNK CABLES SHALL HAVE APPROVED CABLE RESTRAINTS EVERY (60) SIXTY FEET AND SECURELY FASTENED TO THE CABLE TRAY SYSTEM. NFPA 70 (NEC) ARTICLE 770 RULES SHALL APPLY.
- THE TYPE TC-ER CABLES SHALL BE INSTALLED INTO CONDUITS, CHANNEL CABLE TRAYS, OR CABLE TRAY AND SHALL BE SECURED AT INTERVALS NOT EXCEEDING (6) SIX FEET. AN EXCEPTION: WHERE TYPE TC-ER CABLES ARE NOT SUBJECT TO PHYSICAL DAMAGE, CABLES SHALL BE PERMITTED TO MAKE A TRANSITION BETWEEN CONDUITS, CHANNEL CABLE TRAYS, OR CABLE TRAY WHICH ARE SERVING UTILIZATION EQUIPMENT OR DEVICES, A DISTANCE (6) SIX FEET SHALL NOT BE EXCEEDED WITHOUT CONTINUOUS SUPPORTING. NFPA 70 (NEC) ARTICLES 336 AND 392 RULES SHALL APPLY.
- WHEN INSTALLING OPTIC FIBER TRUNK CABLES OR TYPE TC-ER CABLES INTO CONDUITS, NFPA 70 (NEC) ARTICLE 300 RULES SHALL APPLY.

COAXIAL CABLE NOTES

- TYPES AND SIZES OF THE ANTENNA CABLE ARE BASED ON ESTIMATED LENGTHS. PRIOR TO ORDERING CABLE, CONTRACTOR SHALL VERIFY ACTUAL LENGTH BASED ON CONSTRUCTION LAYOUT AND NOTIFY THE PROJECT MANAGER IF ACTUAL LENGTHS EXCEED ESTIMATED LENGTHS.
- CONTRACTOR SHALL VERIFY THE DOWN-TILT OF EACH ANTENNA WITH A DIGITAL LEVEL.
- CONTRACTOR SHALL CONFIRM COAX COLOR CODING PRIOR TO CONSTRUCTION. REFER TO "ANTENNA SYSTEM LABELING STANDARD" ND-00027 LATEST VERSION.
- ALL JUMPERS TO THE ANTENNAS FROM THE MAIN TRANSMISSION LINE SHALL BE 1/2" DIA. LDF AND SHALL NOT EXCEED 6'-0".
- ALL COAXIAL CABLE SHALL BE SECURED TO THE DESIGNED SUPPORT STRUCTURE, IN AN APPROVED MANNER, AT DISTANCES NOT TO EXCEED 4'-0" O.C.
- CONTRACTOR SHALL FOLLOW ALL MANUFACTURER'S RECOMMENDATIONS REGARDING BOTH THE INSTALLATION AND GROUNDING OF ALL COAXIAL CABLES, CONNECTORS, ANTENNAS, AND ALL OTHER EQUIPMENT.
- CONTRACTOR SHALL WEATHERPROOF ALL ANTENNA CONNECTORS WITH SELF AMALGAMATING TAPE. WEATHERPROOFING SHALL BE COMPLETED IN STRICT ACCORDANCE WITH AT&T STANDARDS.
- CONTRACTOR SHALL GROUND ALL EQUIPMENT, INCLUDING ANTENNAS, RET MOTORS, TMA'S, COAX CABLES, AND RET CONTROL CABLES AS A COMPLETE SYSTEM. GROUNDING SHALL BE EXECUTED BY QUALIFIED WIREMEN IN COMPLIANCE WITH MANUFACTURER'S SPECIFICATION AND RECOMMENDATION.
- CONTRACTOR SHALL PROVIDE STRAIN-RELIEF AND CABLE SUPPORTS FOR ALL CABLE ASSEMBLIES, COAX CABLES, AND RET CONTROL CABLES. CABLE STRAIN-RELIEFS AND CABLE SUPPORTS SHALL BE APPROVED FOR THE PURPOSE. INSTALLATION SHALL BE IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS AND RECOMMENDATIONS.
- CONTRACTOR TO VERIFY THAT EXISTING COAX HANGERS ARE STACKABLE SNAP IN HANGERS. IF EXISTING HANGERS ARE NOT STACKABLE SNAP IN HANGERS THE CONTRACTOR SHALL REPLACE EXISTING HANGERS WITH NEW SNAP IN HANGERS IF APPLICABLE.

GENERAL CABLE AND EQUIPMENT NOTES



- CONTRACTOR SHALL BE RESPONSIBLE TO VERIFY ANTENNA, TMAS, DPLEXERS, AND COAX CONFIGURATION, MAKE AND MODELS PRIOR TO INSTALLATION.
- ALL CONNECTIONS FOR HANGERS, SUPPORTS, BRACING, ETC. SHALL BE INSTALLED PER TOWER MANUFACTURER'S RECOMMENDATIONS.

- CONTRACTOR SHALL REFERENCE THE TOWER STRUCTURAL ANALYSIS/DESIGN DRAWINGS FOR DIRECTIONS ON CABLE DISTRIBUTION/ROUTING.
- ALL OUTDOOR RF CONNECTORS/CONNECTIONS SHALL BE WEATHERPROOFED, EXCEPT THE RET CONNECTORS, USING BUTYL TAPE AFTER INSTALLATION AND FINAL CONNECTIONS ARE MADE. BUTYL TAPE SHALL HAVE A MINIMUM OF ONE-HALF TAPE WIDTH OVERLAP ON EACH TURN AND EACH LAYER SHALL BE WRAPPED THREE TIMES. WEATHERPROOFING SHALL BE SMOOTH WITHOUT BUCKLING. BUTYL BLEEDING IS NOT ALLOWED.
- IF REQUIRED TO PAINT ANTENNAS AND/OR COAX:
 - TEMPERATURE SHALL BE ABOVE 50° F.
 - PAINT COLOR MUST BE APPROVED BY BUILDING OWNER/LANDLORD.
 - FOR REGULATED TOWERS, FAA/FCC APPROVED PAINT IS REQUIRED.
 - DO NOT PAINT OVER COLOR CODING OR ON EQUIPMENT MODEL NUMBERS.
- ALL CABLES SHALL BE GROUNDED WITH COAXIAL CABLE GROUND KITS. FOLLOW THE MANUFACTURER'S RECOMMENDATIONS.
 - GROUNDING AT THE ANTENNA LEVEL.
 - GROUNDING AT MID LEVEL, TOWERS WHICH ARE OVER 200'-0", ADDITIONAL CABLE GROUNDING REQUIRED.
 - GROUNDING AT BASE OF TOWER PRIOR TO TURNING HORIZONTAL.
 - GROUNDING OUTSIDE THE EQUIPMENT SHELTER AT ENTRY PORT.
 - GROUNDING INSIDE THE EQUIPMENT SHELTER AT THE ENTRY PORT.
- ALL PROPOSED GROUND BAR DOWNLEADS ARE TO BE TERMINATED TO THE EXISTING ADJACENT GROUND
- BAR DOWNLEADS A MINIMUM DISTANCE OF 4'-0" BELOW GROUND BAR. TERMINATIONS MAY BE EXOTHERMIC OR COMPRESSION.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING THE ANTENNA AND THE COAX CONFIGURATION IS THE CORRECT MAKE AND MODELS, PRIOR TO INSTALLATION.
- ALL CONNECTIONS FOR HANGERS, SUPPORTS, BRACING, ETC. SHALL BE INSTALLED PER TOWER MANUFACTURER'S SPECIFICATION & RECOMMENDATIONS.
- ANTENNA CONTRACTOR SHALL FURNISH AND INSTALL A 12'-0" T-BOOM SECTOR ANTENNA MOUNT, IF APPLICABLE, INCLUDING ALL HARDWARE.

GROUNDING NOTES

- GROUNDING IS SHOWN DIAGRAMMATICALLY ONLY.
- CONTRACTOR SHALL GROUND ALL EQUIPMENT AS A COMPLETE SYSTEM. GROUNDING SHALL BE IN COMPLIANCE WITH NEC SECTION 250 AND AT&T GROUNDING AND BONDING REQUIREMENTS (ATT-TP-76416) AND MANUFACTURER'S SPECIFICATIONS.
- ALL GROUND CONDUCTORS SHALL BE COPPER; NO ALUMINUM CONDUCTORS SHALL BE USED.
- ALL CABLES SHALL BE GROUNDED WITH COAXIAL CABLE GROUNDING KITS. FOLLOW THE MANUFACTURER'S RECOMMENDATIONS.
 - GROUNDING AT THE ANTENNA LEVEL.
 - GROUNDING AT MID LEVEL, TOWERS WHICH ARE OVER 200', ADDITIONAL CABLE GROUNDING REQUIRED.
 - GROUNDING AT BASE OF TOWER PRIOR TO TURNING HORIZONTAL.
 - GROUNDING OUTSIDE THE EQUIPMENT SHELTER AT ENTRY PORT.
 - GROUNDING INSIDE THE EQUIPMENT SHELTER AT THE ENTRY PORT.
- ALL PROPOSED GROUNDING BAR DOWNLEADS ARE TO BE TERMINATED TO THE EXISTING ADJACENT GROUNDING BAR DOWNLEADS A MINIMUM DISTANCE OF 4'-0" BELOW GROUNDING BAR. TERMINATIONS MAY BE EXOTHERMIC OR COMPRESSION.

AB	ANCHOR BOLT	COL	COLUMN	FIN	FINISHED	MAS	MASONRY	QTY	QUANTITY	TOF	TOP OF FOUNDATION
ABV	ABOVE	COMM	COMMON	FLR	FLOOR	MAX	MAXIMUM	RAD	RADIUS	TOP	TOP OF PLATE (PARAPET)
AC	ALTERNATING CURRENT	CONC	CONCRETE	FDN	FOUNDATION	MB	MACHINE BOLT	RECT	RECTIFIER	TOS	TOP OF STEEL
ADDL	ADDITIONAL	CONSTR	CONSTRUCTION	FOC	FACE OF CONCRETE	MECH	MECHANICAL	REF	REFERENCE	TOW	TOP OF WALL
AFF	ABOVE FINISHED FLOOR	DBL	DOUBLE	FOM	FACE OF MASONRY	MFR	MANUFACTURER	REINF	REINFORCEMENT	TVSS	TRANSIENT VOLTAGE SUPPRESSION SYSTEM
AFG	ABOVE FINISHED GRADE	DC	DIRECT CURRENT	FOS	FACE OF STUD	MGB	MASTER GROUND BAR	REQ'D	REQUIRED		
AIC	AMPERAGE INTERRUPTION CAPACITY	DEPT	DEPARTMENT	FOW	FACE OF WALL	MIN	MINIMUM	RET	REMOTE ELECTRIC TILT	TYP	TYPICAL
ALUM	ALUMINUM	DF	DOUGLAS FIR	FS	FINISH SURFACE	MISC	MISCELLANEOUS	RMC	RIGID METALLIC CONDUIT	UG	UNDERGROUND
ALT	ALTERNATE	DIA	DIAMETER	FT	FOOT	MTL	METAL	RRH	REMOTE RADIO HEAD	UL	UNDERWRITERS LABORATORY
ANT	ANTENNA	DIAG	DIAGONAL	FTG	FOOTING	MTS	MANUAL TRANSFER SWITCH	RRU	REMOTE RADIO UNIT	UNO	UNLESS NOTED OTHERWISE
APPROX	APPROXIMATE	DIM	DIMENSION	GA	GAUGE	MW	MICROWAVE	RWY	RACEWAY	UMTS	UNIVERSAL MOBILE
ARCH	ARCHITECTURAL	DWG	DRAWING	GEN	GENERATOR	(N)	NEW	SCH	SCHEDULE		TELECOMMUNICATIONS SYSTEM
ATS	AUTOMATIC TRANSFER SWITCH	DWL	DOWEL	GFCI	GROUND FAULT CIRCUIT INTERRUPTER	NEC	NATIONAL ELECTRIC CODE	SHT	SHEET	UPS	UNINTERRUPTIBLE POWER SYSTEM (DC POWER PLANT)
AWG	AMERICAN WIRE GAUGE	(E)	EXISTING	GLB	GLUE LAMINATED BEAM	NO.(#)	NUMBER	SIAD	SMART INTEGRATED DEVICE		VERIFIED IN FIELD
BATT	BATTERY	EA	EACH	GLV	GALVANIZED	NTS	NOT TO SCALE	SIM	SIMILAR	VIF	VERIFIED IN FIELD
BLDG	BUILDING	EC	ELECTRICAL CONDUCTOR	GPS	GLOBAL POSITIONING SYSTEM	OC	ON CENTER	SPEC	SPECIFICATION	W	WIDE
BLK	BLOCK	EL	ELEVATION	GND	GROUND	OPNG	OPENING	SO	SQUARE	W	WITH
BLKG	BLOCKING	ELEC	ELECTRICAL	GSM	GLOBAL SYSTEM FOR MOBILE	(P)	PROPOSED	SS	STAINLESS STEEL	WD	WOOD
BM	BEAM	EMT	ELECTRICAL METALLIC TUBING	HDR	HEADER	PIC	PRECAST CONCRETE	STD	STANDARD	W.P.	WORK POINT
BTC	BARE TINNED COPPER CONDUCTOR	ENG	ENGINEER	HGR	HANGER	PCS	PERSONAL COMMUNICATION SERVICES	STL	STEEL	WP	WEATHERPROOF
BOF	BOTTOM OF FOOTING	EQ	EQUAL	HVAC	HEAT/VENTILATION/AIR CONDITIONING	PCU	PRIMARY CONTROL UNIT	STRUCT	STRUCTURAL	WT	WEIGHT
CAB	CABINET	EXP	EXPANSION	HT	HEIGHT	PRC	PRIMARY RADIO CABINET	TEMP	TEMPORARY		
CANT	CANTILEVERED	EXT	EXTERIOR	IGR	INTERIOR GROUND RING	PP	POLARIZING PRESERVING	THK	THICKNESS		
CEC	CALIFORNIA ELECTRIC CODE	FAB	FABRICATION	IN	INCH	PSF	POUNDS PER SQUARE FOOT	TMA	TOWER MOUNTED AMPLIFIER		
CHG	CHARGING	FF	FINISH FLOOR	INT	INTERIOR	PSI	POUNDS PER SQUARE INCH	TN	TOE NAIL		
CLG	CEILING	FG	FINISH GRADE	LB(S)	POUND(S)	PT	PRESSURE TREATED	TOA	TOP OF ANTENNA		
CLR	CLEAR	FIF	FACILITY INTERFACE FRAME	LF	LINEAR FEET	PWR	POWER CABINET	TOC	TOP OF CURB		

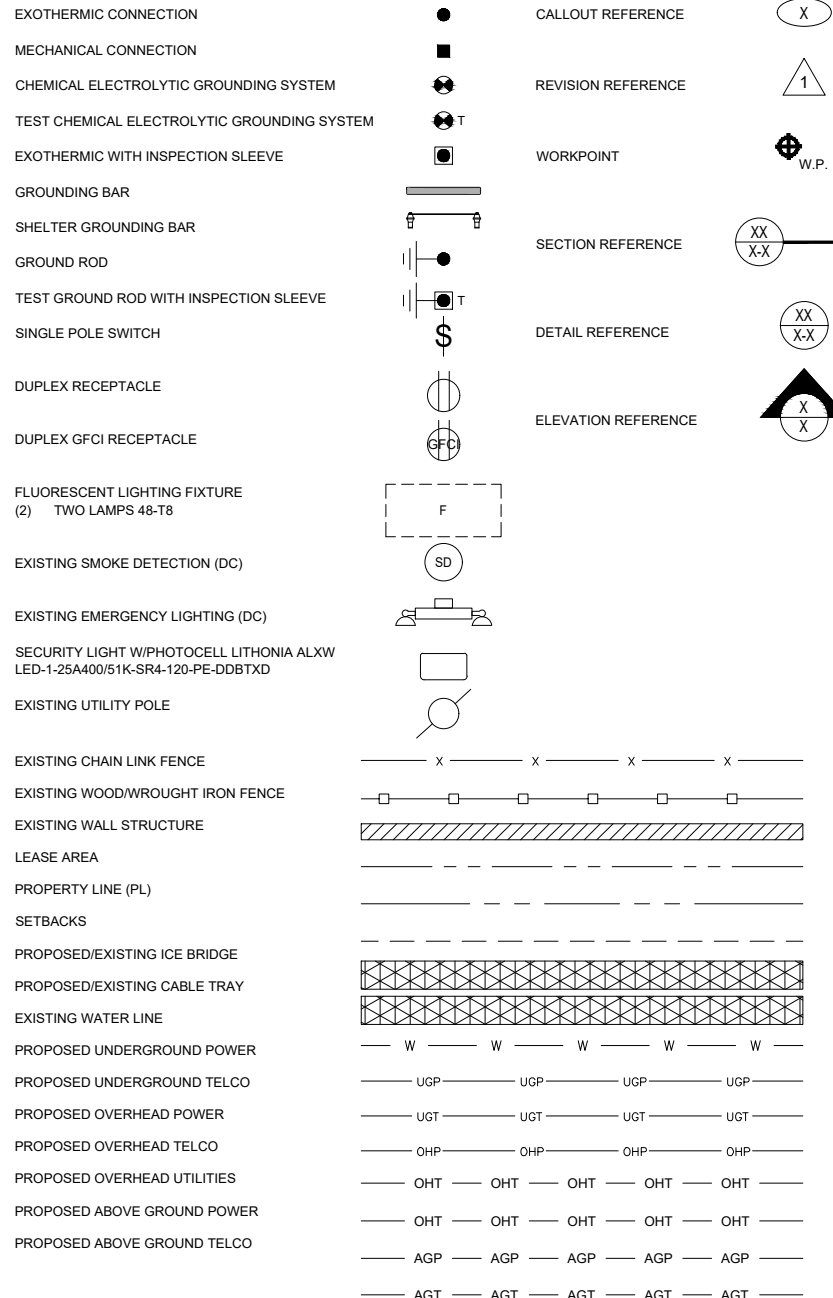

PROJECT NO: ERCC0004

DRAWN BY: DAP

CHECKED BY: CAT



SUBMITTALS		
0	04/22/19	ISSUED FOR PERMITTING

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF AT&T WIRELESS, ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

FA# 10035444
SITE# CT2066
WOODBURY CT GEART
HOLLOW RD
GREAT HOLLOW ROAD
WOODBURY, CT 06798

GENERAL NOTES II

GN-2

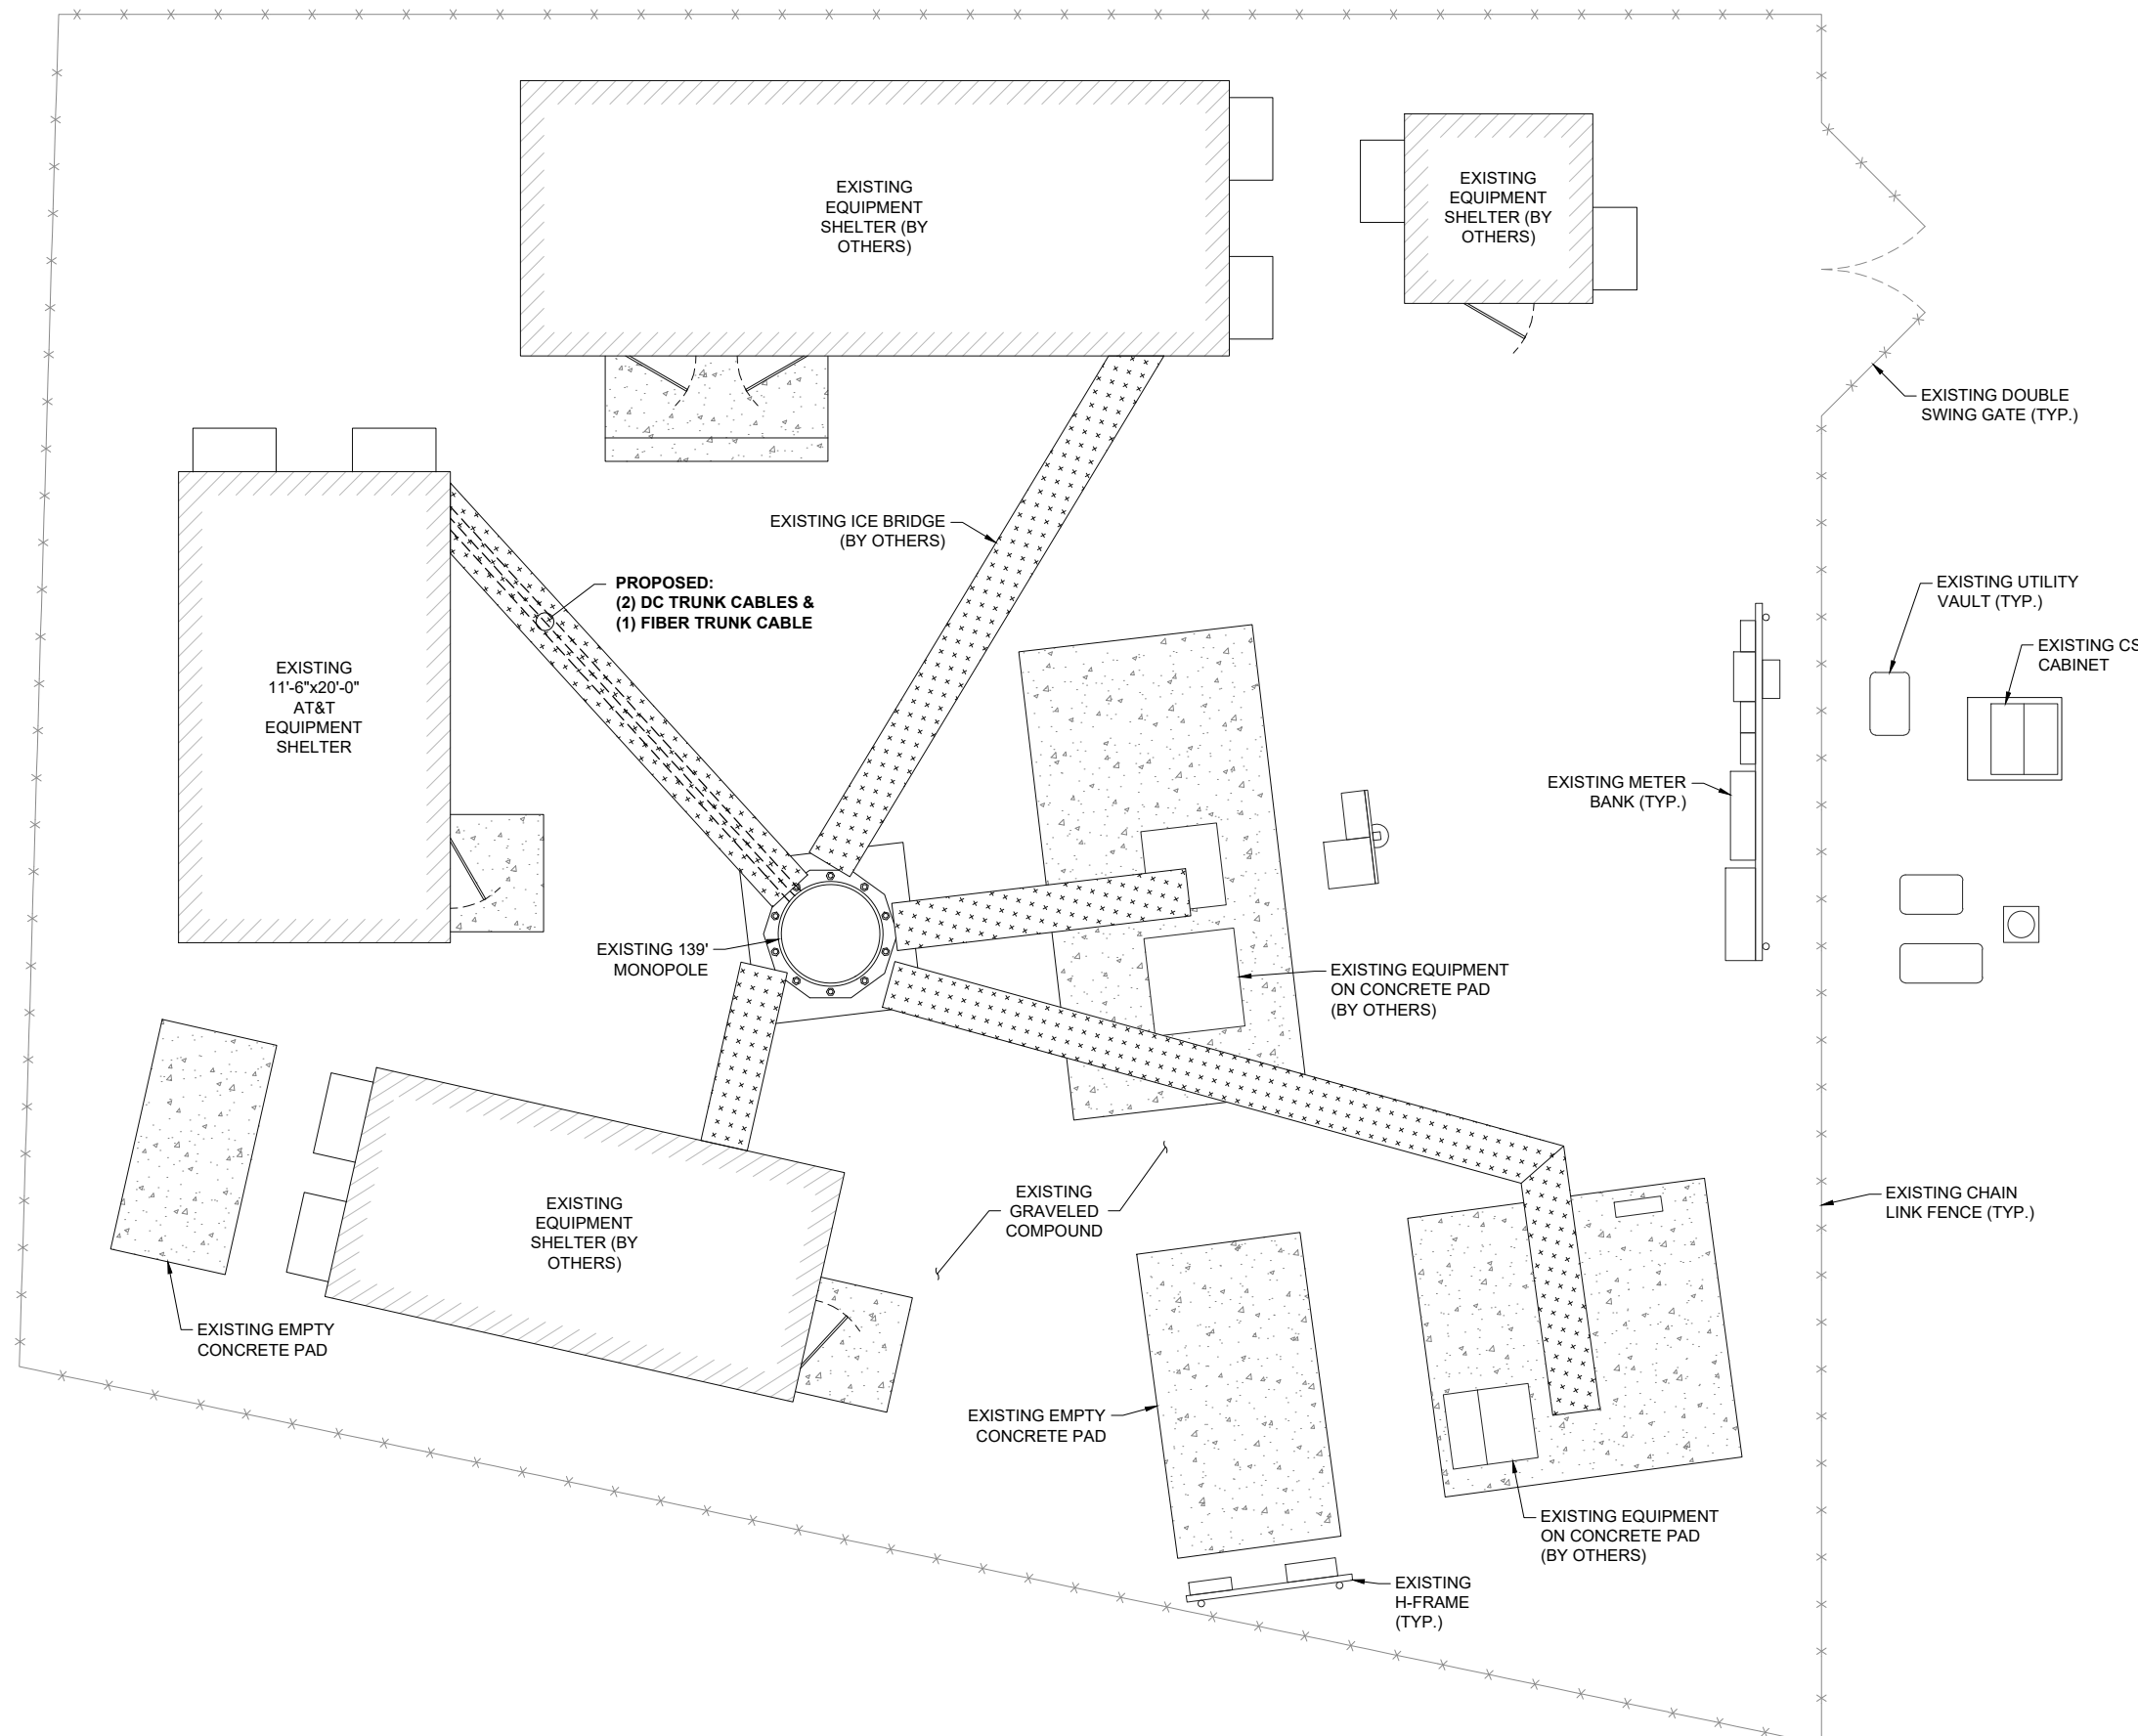

NOTES:

1. PLAN BASED ON AS-BUILT DRAWINGS ISSUED BY COM EX CONSULTANTS ON 03/20/17. CONTRACTOR TO FIELD VERIFY ALL DIMENSIONS AND LOCATION/ORIENTATION OF EXISTING EQUIPMENT.

5841 BRIDGE STREET
EAST SYRACUSE, NY 13057

3 CORPORATE PARK DRIVE
SUITE 101
CLIFTON PARK, NY 12065

JACOBS ENGINEERING GROUP, INC.
120 ST. JAMES AVENUE, 5TH FLOOR
BOSTON, MA 02116



PROJECT NO: ERCC0004

DRAWN BY: DAP

CHECKED BY: CAT

SUBMITTALS		
0	04/22/19	ISSUED FOR PERMITTING

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF AT&T WIRELESS. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

FA# 10035444
SITE# CT2066
WOODBURY CT GEART
HOLLOW RD
GREAT HOLLOW ROAD
WOODBURY, CT 06798

SITE PLAN

C-1




5841 BRIDGE STREET
EAST SYRACUSE, NY 13057



3 CORPORATE PARK DRIVE
SUITE 101
CLIFTON PARK, NY 12065



120 ST. JAMES AVENUE, 5TH FLOOR
BOSTON, MA 02116



PROJECT NO: ERCC0004

DRAWN BY: DAP

CHECKED BY: CAT

SUBMITTALS




0 04/22/19 ISSUED FOR PERMITTING

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF AT&T WIRELESS. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.


FA# 10035444
SITE# CT2066
WOODBURY CT GEART
HOLLOW RD
GREAT HOLLOW ROAD
WOODBURY, CT 06798

EQUIPMENT LAYOUT &
PROPOSED TOWER
ELEVATION

C-2

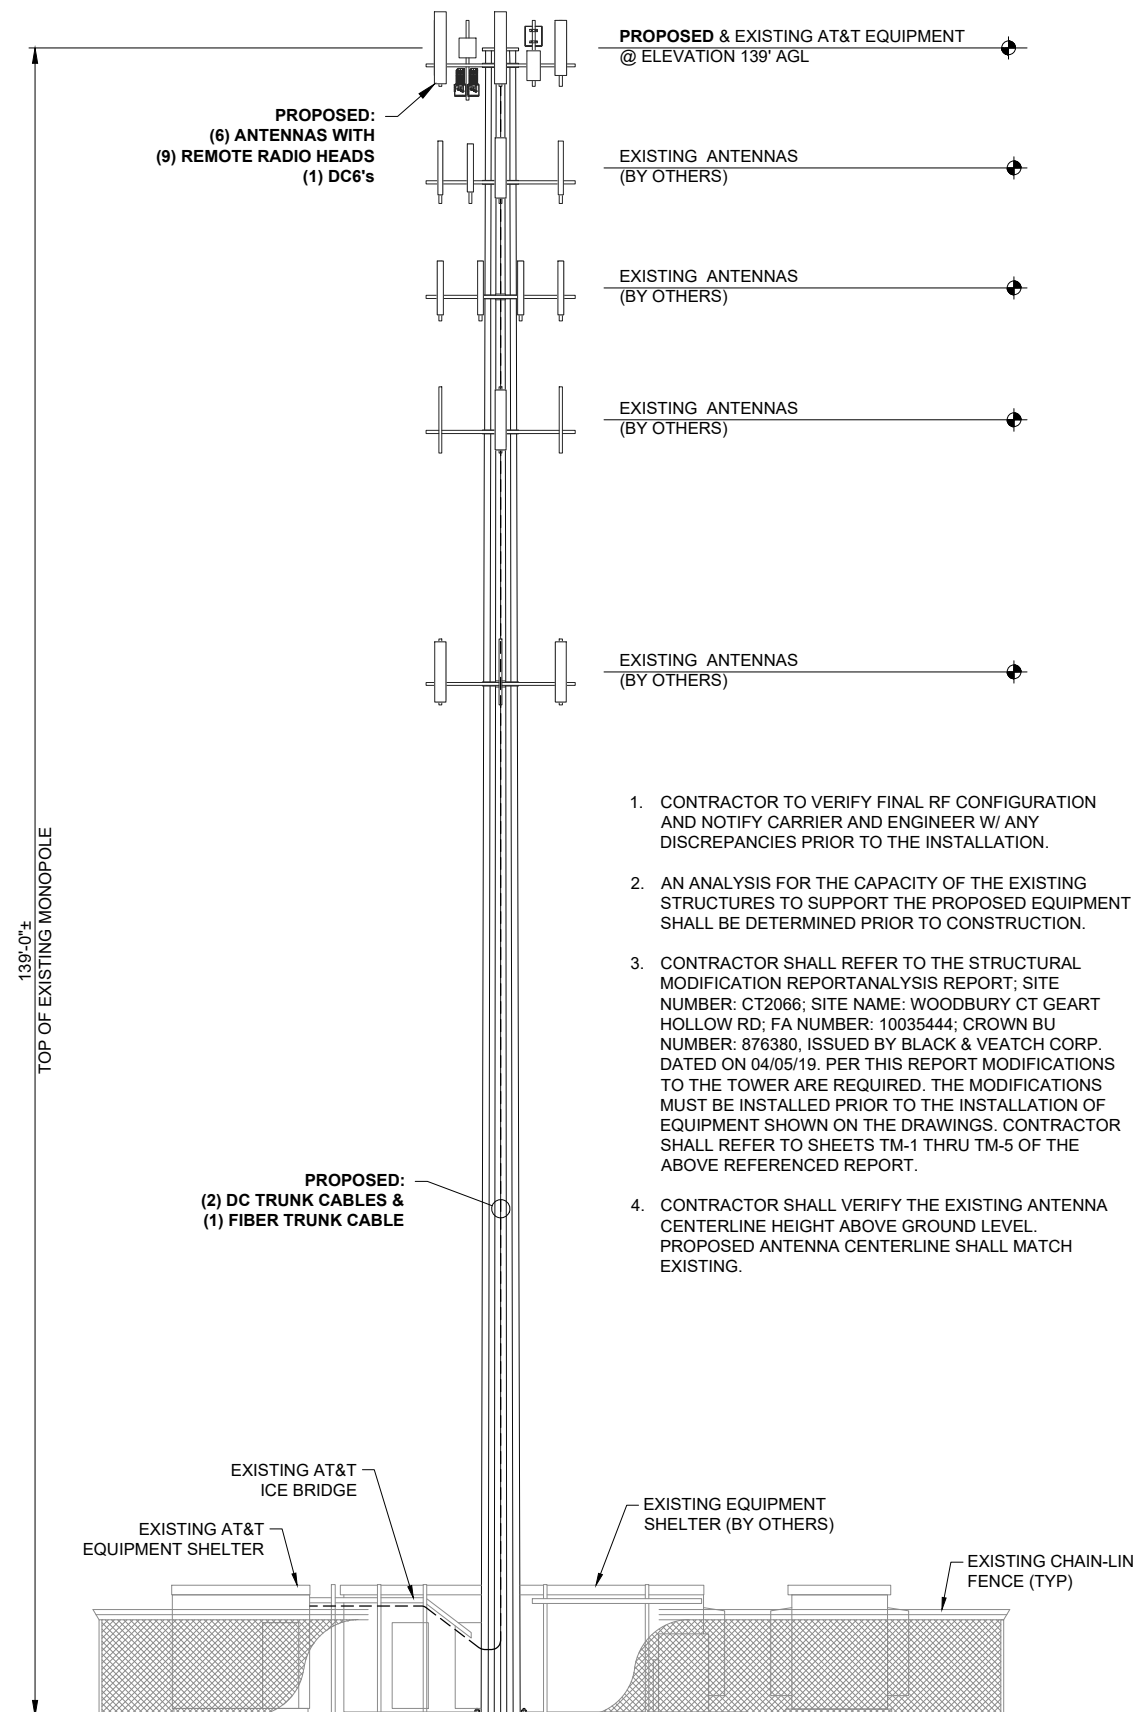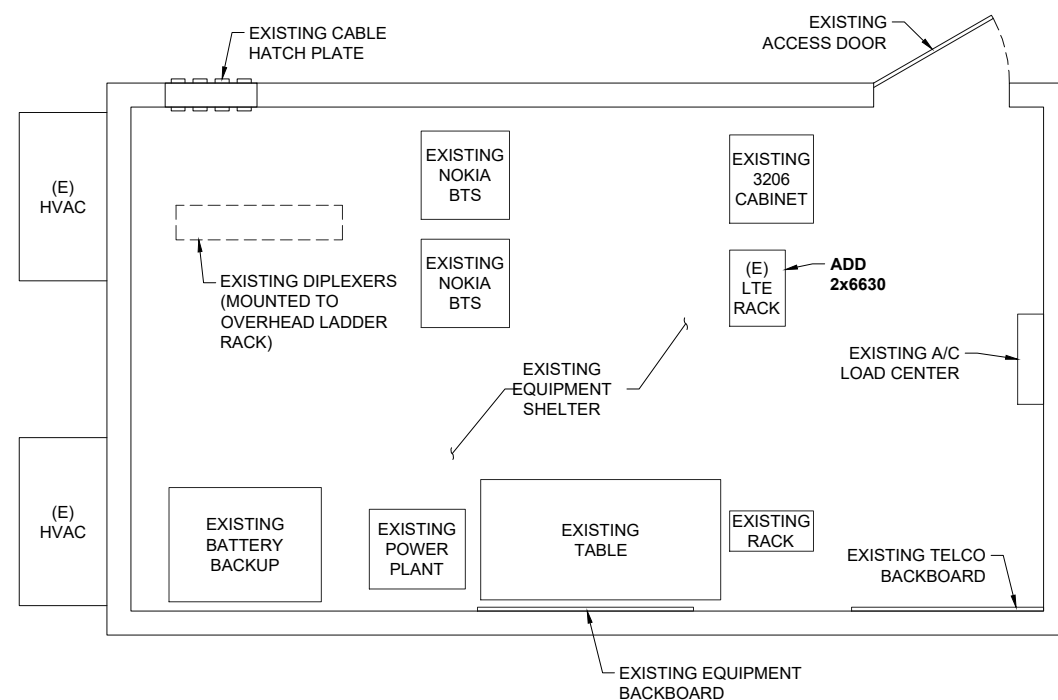

1. CONTRACTOR TO VERIFY FINAL RF CONFIGURATION AND NOTIFY CARRIER AND ENGINEER W/ ANY DISCREPANCIES PRIOR TO THE INSTALLATION.
2. AN ANALYSIS FOR THE CAPACITY OF THE EXISTING STRUCTURES TO SUPPORT THE PROPOSED EQUIPMENT SHALL BE DETERMINED PRIOR TO CONSTRUCTION.
3. CONTRACTOR SHALL REFER TO THE STRUCTURAL MODIFICATION REPORT ANALYSIS REPORT; SITE NUMBER: CT2066; SITE NAME: WOODBURY CT GEART HOLLOW RD; FA NUMBER: 10035444; CROWN BU NUMBER: 876380, ISSUED BY BLACK & VEATCH CORP. DATED ON 04/05/19. PER THIS REPORT MODIFICATIONS TO THE TOWER ARE REQUIRED. THE MODIFICATIONS MUST BE INSTALLED PRIOR TO THE INSTALLATION OF EQUIPMENT SHOWN ON THE DRAWINGS. CONTRACTOR SHALL REFER TO SHEETS TM-1 THRU TM-5 OF THE ABOVE REFERENCED REPORT.
4. CONTRACTOR SHALL VERIFY THE EXISTING ANTENNA CENTERLINE HEIGHT ABOVE GROUND LEVEL. PROPOSED ANTENNA CENTERLINE SHALL MATCH EXISTING.

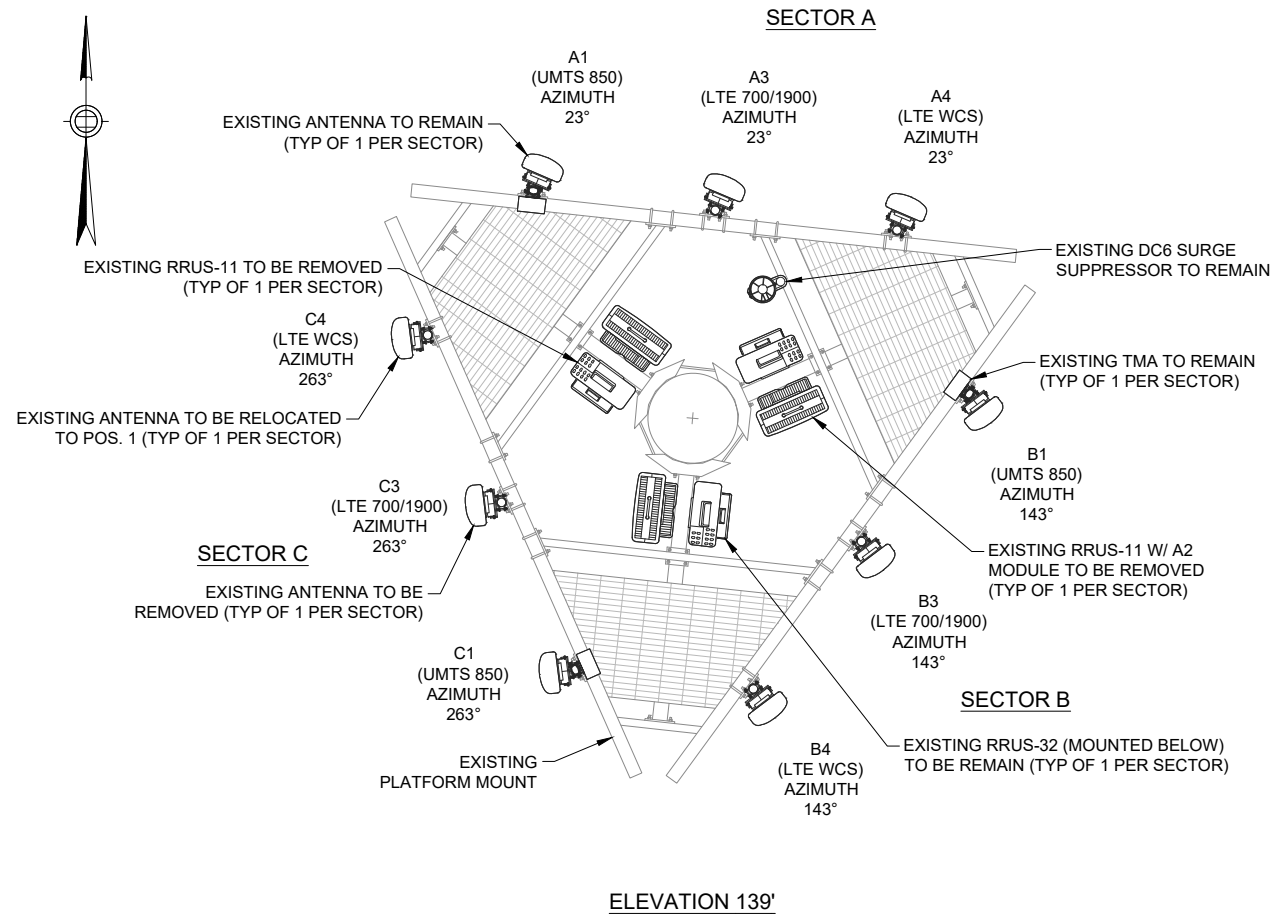

NOTES:

1. CONTRACTOR SHALL REFER TO THE TOWER EQUIPMENT INSTALLATION STRUCTURAL ANALYSIS REPORT; SITE NUMBER: CT2066; SITE NAME: WOODBURY CT GEART HOLLOW RD; FA LOCATION: 10035444; CROWN BU NUMBER: 876380; CROWN SITE NAME: O&G WOODBURY; CROWN ORDER NUMBER: 475080; ISSUED BY JACOBS ENGINEERING GROUP, INC. DATED ON 02/28/19. PER THIS ANALYSIS NO MODIFICATIONS ARE REQUIRED TO THE TOWER. CONTRACTOR SHALL CONFIRM ALL AT&T EXISTING AND PROPOSED EQUIPMENT ARE INSTALLED IN ACCORDANCE WITH THIS REPORT.
2. CONTRACTOR TO VERIFY FINAL RF CONFIGURATION AND NOTIFY CARRIER AND ENGINEER W/ ANY DISCREPANCIES PRIOR TO THE INSTALLATION.
3. CONTRACTOR SHALL NOT EXCEED MOUNTING MORE THAN (2) RRHS PER ANTENNA MOUNTING PIPE - RELOCATE TO AN ADJACENT ANTENNA MOUNTING PIPE AS NEEDED.
4. CONTRACTOR TO VERIFY FINAL RF CONFIGURATION AND NOTIFY CARRIER AND ENGINEER W/ ANY DISCREPANCIES PRIOR TO THE INSTALLATION.



5841 BRIDGE STREET
EAST SYRACUSE, NY 13057



3 CORPORATE PARK DRIVE
SUITE 101
CLIFTON PARK, NY 12065



120 ST. JAMES AVENUE, 5TH FLOOR
BOSTON, MA 02116



PROJECT NO: ERCC0004

DRAWN BY: DAP

CHECKED BY: CAT

SUBMITTALS		
0	04/22/19	ISSUED FOR PERMITTING

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF AT&T WIRELESS. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.


FA# 10035444
SITE# CT2066
WOODBURY CT GEART
HOLLOW RD
GREAT HOLLOW ROAD
WOODBURY, CT 06798

EXISTING & PROPOSED
ANTENNA LAYOUT

C-3

1 EXISTING ANTENNA LAYOUT

SCALE: N.T.S.

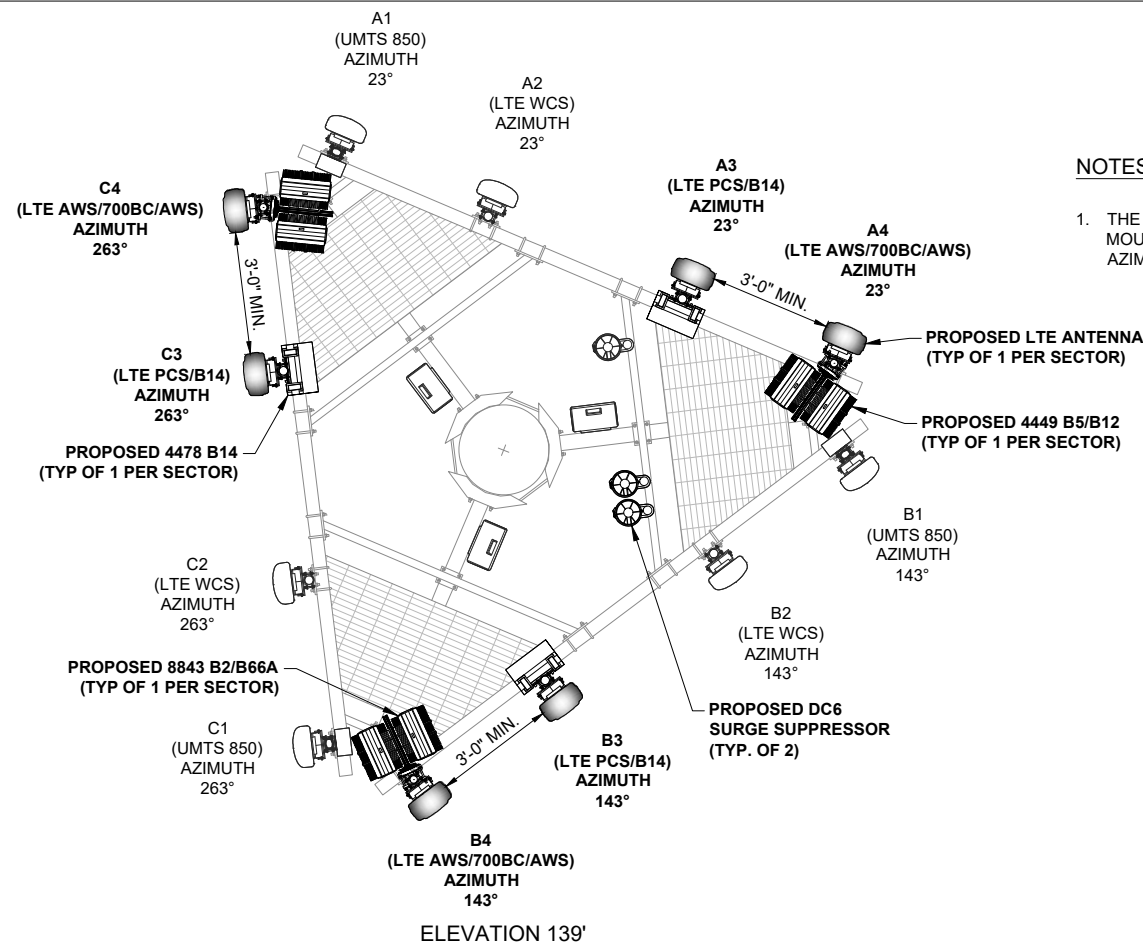


NOTES:

1. THE CONTRACTOR SHALL ROTATE THE PLATFORM MOUNT 17° TO THE EAST TO ACCOMMODATE THE AZIMUTH OF THE PROPOSED LTE ANTENNAS.


2 PROPOSED ANTENNA LAYOUT

SCALE: N.T.S.

MANUFACTURER: **KATHREIN**
 MODEL NO.: **800-10964**
 RADOME MATERIAL: FIBERGLASS, UV RESISTANT
 COLOR: LIGHT GRAY
 DIMENSIONS (LxWxD): 59.0" x 20.0" x 6.9"
 1499mm x 508mm x 175mm
 WEIGHT (lbs): 83.8
 CONNECTOR: 8 x 4.3-10 FEMALE
 FRONT WIND LOAD: 188 LBF @ 93 MPH
 835 N @ 150 KM/H
 SIDE WIND LOAD: 189 LBF @ 93 MPH
 840 N @ 150 KM/H
 WIND SPEED MAX.: >150 MPH (>241 KM/H)


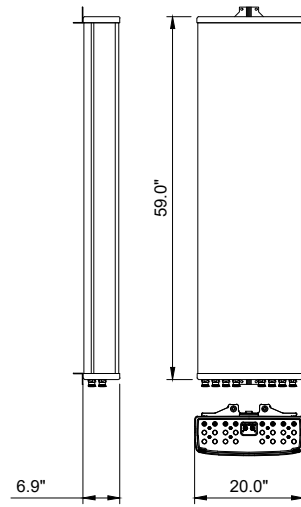


MANUFACTURER: **KATHREIN**
 MODEL NO.: **800-10965**
 RADOME MATERIAL: FIBERGLASS, UV RESISTANT
 COLOR: LIGHT GRAY
 DIMENSIONS (LxWxD): 78.7" x 20.0" x 6.9"
 1999mm x 508mm x 175mm
 WEIGHT (lbs): 97.6
 CONNECTOR: 8 x 4.3-10 FEMALE
 FRONT WIND LOAD: 254 LBF @ 93 MPH
 1130 N @ 150 KM/H
 SIDE WIND LOAD: 256 LBF @ 93 MPH
 1140 N @ 150 KM/H
 WIND SPEED MAX.: >150 MPH (>241 KM/H)

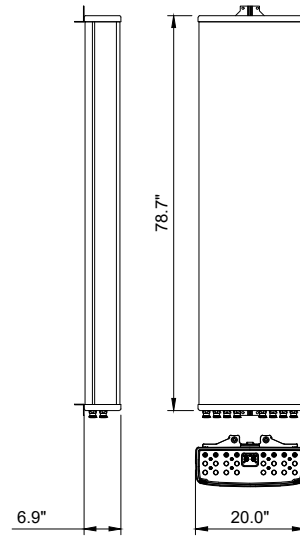

MANUFACTURER: **ERICSSON**
 MODEL NO.: **RRUS-4478 B14**
 TECHNOLOGY: LTE 700
 DIMENSIONS (HxWxD): 18.1" x 13.4" x 8.26"
 WEIGHT (lbs): 59.4
 POWER SUPPLY: -48V

NOTE:
 PENDING FINAL PRODUCT SPECIFICATION

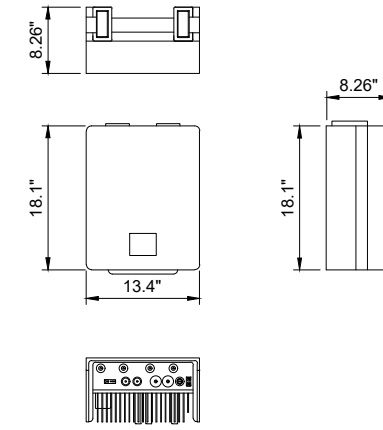

1 ANTENNA SPECIFICATIONS

SCALE: N.T.S.


2 ANTENNA SPECIFICATIONS

SCALE: N.T.S.


3 RRUS SPECIFICATIONS

SCALE: N.T.S.

MANUFACTURER: **ERICSSON**
 MODEL NO.: **RRUS-4449 B5 & B12**
 TECHNOLOGY: DUAL BAND
 DIMENSIONS (HxWxD): 14.96" x 13.19" x 10.43"
 WEIGHT (lbs): 73.0
 POWER SUPPLY: -48V
 TEMPERATURE: -40 °C TO 55 °C

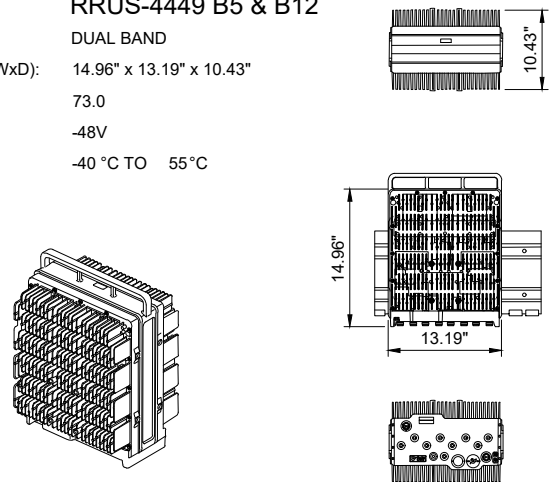


MANUFACTURER: **ERICSSON**
 MODEL NO.: **RRUS-8843 B2/B66A**
 TECHNOLOGY: PCS/AWS
 DIMENSIONS (HxWxD): 18.0" x 13.2" x 11.3"
 WEIGHT (lbs): 75.0
 POWER SUPPLY: -48V
 TEMPERATURE: -40 °C TO 55 °C

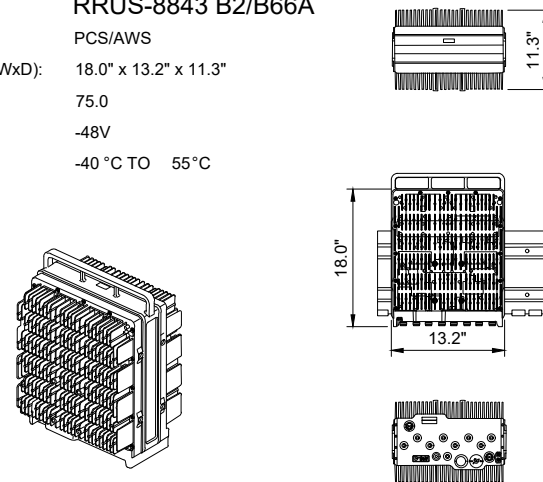

RAYCAP DC6-48-60-18-8F

DIMENSIONS (HxWxD): 31.25" x 11.0" x 18.5"
 TOTAL WEIGHT (lbs): 32.8
 NOMINAL OPERATING VOLTAGE: 48 VDC
 NOMINAL DISCHARGE VOLTAGE: 20 kA 8/20 sμ
 MAXIMUM DISCHARGE CURRENT: 60 kA 8/20 sμ
 MAX. CONT. OPERATING CURRENT: 75 VDC
 VOLTAGE PROTECTION RATING: 400 V
 WIND LOADING: 150 MPH (SUSTAINED)
 195 MPH (GUST)

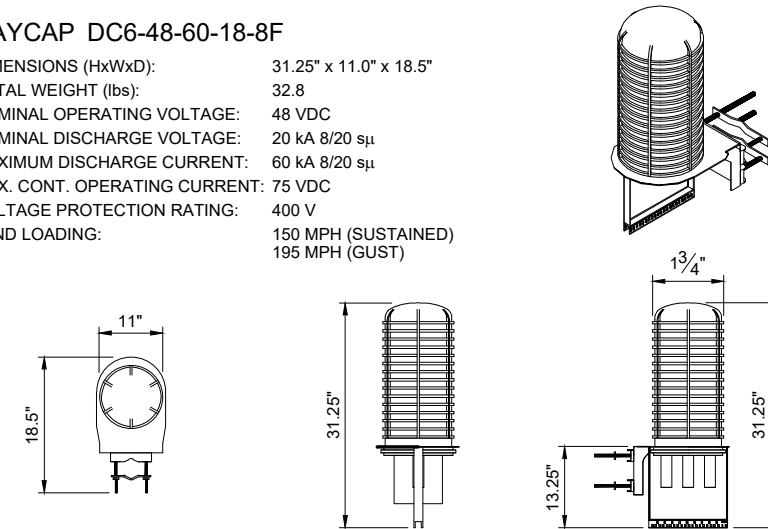

CONTRACTOR TO USE "THREAD LUBRICANT"
 ON MOUNTING BOLTS DURING INSTALLATION

4 RRUS SPECIFICATIONS

SCALE: N.T.S.


5 RRUS SPECIFICATIONS

SCALE: N.T.S.

6 DC FIBER/DC DISTRIBUTION SYSTEM DETAIL

SCALE: N.T.S.

PART #	PIPE SIZE	STAND-OFF ARM
BBPM-K1	2-3/8"	3-1/2" - 4-1/2"
BBPM-K2	2-7/8"	3-1/2" - 4-1/2"
BBPM-K3	2-3/8"	3-1/2" - 6"
BBPM-U	2-3/8" - 4-1/2"	2-3/8" - 4-1/2"

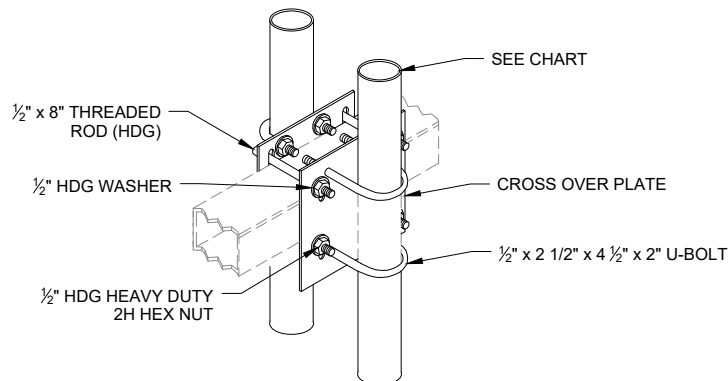


CUE DEE PART # 5335/5336 ERICSSON RRU MOUNTING KIT

SXK 107 2839/1: SINGLE RRU SUPPORT KIT (PART #5335) (OR ENGINEER APPROVED EQUIVALENT)
 SXK 107 2839/2: EXPANSION KIT (PART #5336) (OR ENGINEER APPROVED EQUIVALENT)


MOUNTING NOTES:

REFER TO PRODUCT SPECS FOR BOLT SIZE & PIPE DIAMETER TOLERANCES. THE PART NO. SXK107-2839/2 IS REQUIRED FOR (2) RRUS.
 ANTENNA NOT SHOWN FOR CLARITY.

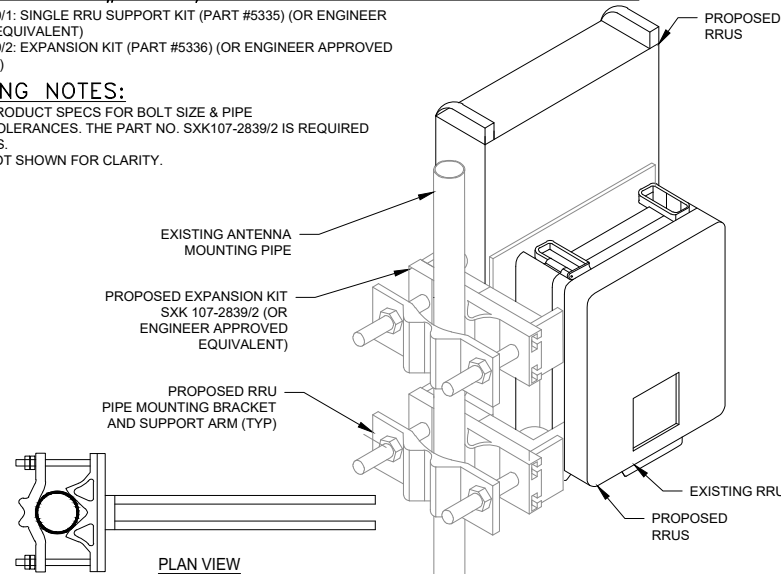

NOTES:

1. MOUNTING OPTIONS ARE INCLUDED PRODUCTS WITH ANTENNA PURCHASE.
2. THERE SHALL BE A MINIMUM 3'-0" SEPARATION BETWEEN ALL LTE PANEL ANTENNAS.

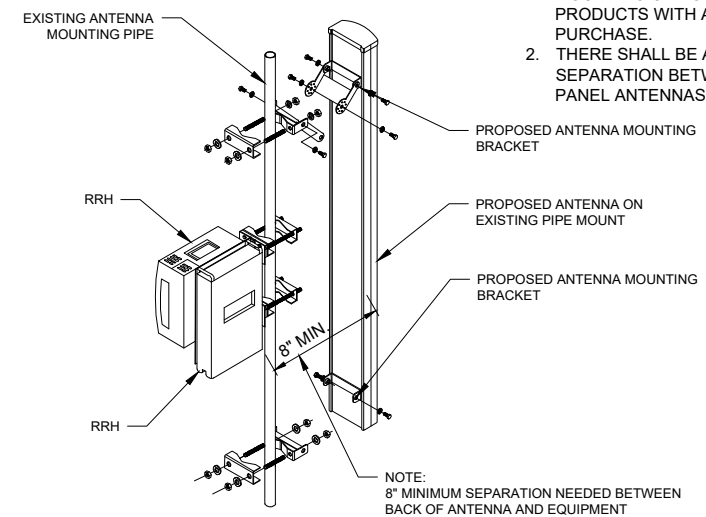

7 DC6 MOUNTING DETAIL

SCALE: N.T.S.

8 RRU MOUNTING DETAIL

SCALE: N.T.S.

9 ANTENNA MOUNTING DETAIL

SCALE: N.T.S.



5841 BRIDGE STREET
 EAST SYRACUSE, NY 13057



3 CORPORATE PARK DRIVE
 SUITE 101
 CLIFTON PARK, NY 12065



120 ST. JAMES AVENUE, 5TH FLOOR
 BOSTON, MA 02116



PROJECT NO: ERCC0004

DRAWN BY: DAP

CHECKED BY: CAT

SUBMITTALS	
0	04/22/19 ISSUED FOR PERMITTING

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF AT&T WIRELESS, ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

FA# 10035444
 SITE# CT2066
 WOODBURY CT GEART
 HOLLOW RD
 GREAT HOLLOW ROAD
 WOODBURY, CT 06798

EQUIPMENT
 DETAILS

C-4

ANTENNA NUMBER	ANTENNA MODEL	ANTENNA BAND	AZIMUTH	ANTENNA CENTERLINE FROM GROUND	TMA's	RRH's	FEEDER	RAYCAP
A1	7770 (55"x11"x5")	UMTS	23°	139'	(1) TT19-08BP111-001	-	(2) 1-1/4" EXISTING (LENGTH @ 212')	(1) RAYCAP DC6-48-60-18-8F
A2	QS66512-2 (72"x12"x9.6")	LTE WCS	23°	139'	-	(1) RRUS-32 (WCS)	(1) FIBER (2) 1-1/4" EXISTING (LENGTH @ 212')	
A3	800-10965 (78.7"x20"x6.9")	LTE PCS/B14	23°	139'	-	(1) 4478 B14 (700)	-	(1) RAYCAP DC6-48-60-18-8F
A4	800-10965 (78.7"x20"x6.9")	LTE AWS/ 700BC/ AWS	23°	139'	-	(1) 4449 B5/B12 (850/700) (1) 8843 B2/B66A (PCS/AWS)	(1) FIBER (4) DC (LENGTH @ 212')	
B1	7770 (55"x11"x5")	UMTS	143°	139'	(1) TT19-08BP111-001	-	(2) 1-1/4" EXISTING (LENGTH @ 212')	(1) RAYCAP DC6-48-60-18-8F
B2	QS66512-2 (72"x12"x9.6")	LTE	143°	139'	-	(1) RRUS-32 (WCS)	(1) FIBER (2) 1-1/4" EXISTING (LENGTH @ 212')	
B3	800-10964 (59"x20"x6.9")	LTE PCS/B14	143°	139'	-	(1) 4478 B14 (700)	-	(1) RAYCAP DC6-48-60-18-8F
B4	800-10964 (59"x20"x6.9")	LTE AWS/ 700BC/ AWS	143°	139'	-	(1) 4449 B5/B12 (850/700) (1) 8843 B2/B66A (PCS/AWS)	-	
G1	7770 (55"x11"x5")	UMTS	263°	139'	(1) TT19-08BP111-001	-	(2) 1-1/4" EXISTING (LENGTH @ 212')	(1) RAYCAP DC6-48-60-18-8F
G2	QS66512-2 (72"x12"x9.6")	LTE	263°	139'	-	(1) RRUS-32 (WCS)	(1) FIBER (2) 1-1/4" EXISTING (LENGTH @ 212')	
G3	800-10964 (59"x20"x6.9")	LTE PCS/B14	263°	139'	-	(1) 4478 B14 (700)	-	(1) RAYCAP DC6-48-60-18-8F
G4	800-10964 (59"x20"x6.9")	LTE AWS/ 700BC/ AWS	263°	139'	-	(1) 4449 B5/B12 (850/700) (1) 8843 B2/B66A (PCS/AWS)	-	

NOTES:

- EQUIPMENT LISTED IN **BOLD**, DELINEATES THAT THE EQUIPMENT IS PROPOSED
- * DENOTES THAT EQUIPMENT IS TO BE GROUND MOUNTED


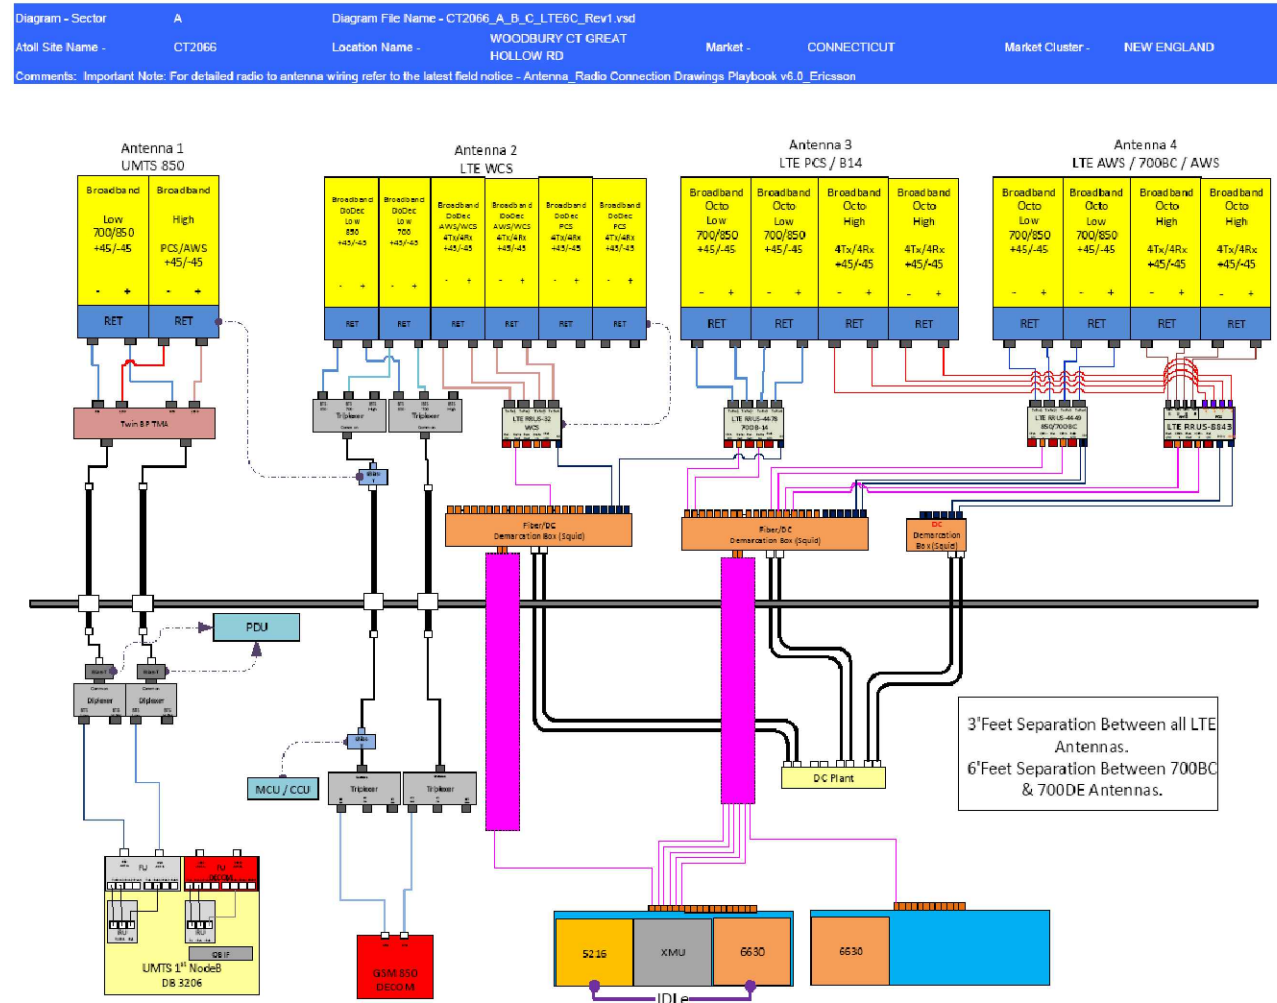


Diagram - Sector A
 Diagram File Name - CT2066_A_B_C_LTE9C_Rev1.vsd
 Aitol Site Name - CT2066
 Location Name - WOODBURY CT GREAT HOLLOW RD
 Market - CONNECTICUT
 Market Cluster - NEW ENGLAND
 Comments: Important Note: For detailed radio to antenna wiring refer to the latest field notice - Antenna_Radio Connection Drawings Playbook v6.0_Ericsson



PROJECT NO: ERCC0004
 DRAWN BY: DAP
 CHECKED BY: CAT

SUBMITTALS	
0	04/22/19 ISSUED FOR PERMITTING

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF AT&T WIRELESS, ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNING AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.


FA# 10035444
 SITE# CT2066
 WOODBURY CT GREAT HOLLOW RD
 GREAT HOLLOW ROAD
 WOODBURY, CT 06798

ANTENNA CHART & RF EQUIPMENT SCHEMATIC

RF-1

NOTES:

1. EXOTHERMIC WELD (2) TWO, #2 AWG BARE TINNED SOLID COPPER CONDUCTORS TO GROUNDING BAR. ROUTE CONDUCTORS TO BURIED GROUNDING RING AND PROVIDE PARALLEL EXOTHERMIC WELD.
2. ALL GROUNDING BARS SHALL BE STAMPED IN TO THE METAL "IF STOLEN DO NOT RECYCLE." THE CONTRACTOR SHALL USE PERMANENT MARKER TO DRAW THE LINES BETWEEN EACH SECTION AND LABEL EACH SECTION ("P", "A", "N", "I") WITH 1" HIGH LETTERS.
3. ALL HARDWARE SHALL BE STAINLESS STEEL 3/8" DIAMETER OR LARGER. ALL HARDWARE 18-8 STAINLESS STEEL INCLUDING LOCK WASHERS. COAT ALL SURFACES WITH AN ANTI-OXIDANT COMPOUND BEFORE MATING.
4. FOR GROUND BOND TO STEEL ONLY: INSERT A CADMIUM FLAT WASHER BETWEEN LUG AND STEEL, COAT ALL SURFACES WITH AN ANTI-OXIDANT COMPOUND BEFORE MATING.
5. DO NOT INSTALL CABLE GROUNDING KIT AT A BEND AND ALWAYS DIRECT GROUNDING CONDUCTOR DOWN TO GROUNDING BUS.
6. NUT & WASHER SHALL BE PLACED ON THE FRONT SIDE OF THE GROUNDING BAR AND BOLTED ON THE BACK SIDE. INSTALL BLACK HEAT-SHRINKING TUBE, 600 VOLT INSULATION, ON ALL GROUNDING TERMINATIONS. THE INTENT IS TO WEATHERPROOF THE COMPRESSION CONNECTION.
7. SUPPLIED AND INSTALLED BY CONTRACTOR.
8. THE CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLING ADDITIONAL GROUNDING BAR AS REQUIRED, PROVIDING 50% SPARE CONNECTION POINTS.
9. ENSURE THE WIRE INSULATION TERMINATION IS WITHIN 1/8" OF THE BARREL (NO SHINERS).

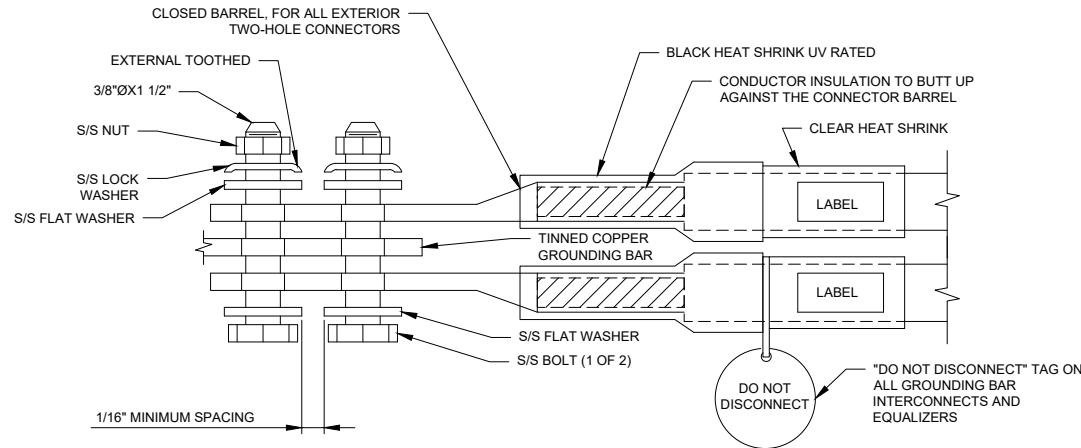

1 EXTERIOR TWO HOLE LUG DETAIL

SCALE: NONE

GENERAL NOTES:

1. CONTRACTOR SHALL HAVE A COMPLETE UNDERSTANDING OF THE CONTENTS OF AT&T STANDARD TP-76416.
2. ALL INSTALLATIONS SHALL BE FIELD VERIFIED.
3. ALL GROUND CONNECTIONS FOR ALL RELOCATED EQUIPMENT SHALL BE RE-ESTABLISHED BY THE CONTRACTOR. CONTRACTOR SHALL FURNISH ALL MATERIALS AS REQUIRED.

GROUNDING NOTES:


1. TOWER GROUNDING BAR: EXTEND (2) #2 AWG TINNED CU WIRE FROM BURIED GROUND RING UP TO THE TOWER GROUND BAR AND MAKE A MECHANICAL CONNECTION. SECURE GROUND BAR DIRECTLY TO TOWER WITH STAINLESS STEEL MOUNTING MATERIAL.
2. ANTENNA GROUNDING BAR: ANDREW CORPORATION PART #UGBKIT-0424-T MOUNT GROUND BAR DIRECTLY TO TOWER. SECURE TO TOWER WITH STAINLESS STEEL MOUNTING MATERIAL.
3. GROUNDING BAR: LOCATED CLOSE TO GRADE LOCK BOX TESSCO PART #351546: INSTALL PER MANUFACTURER GUIDELINES.
4. EXOTHERMIC OR COMPRESSION CONNECTION FOR PIPE MOUNT TO ANTENNA ROUTE CONDUCTOR TO NEAREST GROUNDING BAR SO THE GROUNDING CONDUCTORS PROVIDE A STRAIGHT DOWNWARD PATH TO GROUND. USE #2 AWG SOLID TINNED COPPER CONDUCTOR. GROUNDING CONNECTION SHALL BE LOCATED AT THE TOP 2" OF PIPE.
5. ALL GROUNDING CONDUCTORS SHALL BE #2 AWG COPPER TINNED UNLESS NOTED OTHERWISE.
6. ALL GROUNDING CONDUCTORS SHALL PROVIDE A STRAIGHT DOWNWARD PATH TO GROUND WITH GRADUAL BEND AS REQUIRED. GROUND WIRES SHALL NOT BE LOOPED OR SHARPLY BENT.
7. KOPR-SHIELD ANTI-OXIDATION COMPOUND SHALL BE USED ON ALL COMPRESSION GROUNDING CONNECTIONS.
8. ALL EXOTHERMIC CONNECTIONS SHALL BE INSTALLED UTILIZING THE PROPER CONNECTION/MOLD AND MATERIALS FOR THE PARTICULAR APPLICATION.
9. ALL BOLTED GROUNDING CONNECTIONS SHALL BE INSTALLED WITH AN EXTERNAL TOOTHED LOCK WASHER. GROUNDING BUS BARS MAY HAVE PRE-PUNCHED HOLES OR TAPPED HOLES. ALL HARDWARE SHALL BE SECURITY TORQUE HARDWARE 3/8" STAINLESS STEEL.
10. EXTERNAL GROUNDING CONDUCTOR SHALL NOT BE INSTALLED OR ROUTED THROUGH HOLES IN ANY METAL OBJECTS, CONDUITS, OR SUPPORTS TO PRECLUDE ESTABLISHING A MAGNETIC CHOKE POINT.
11. PLASTIC CLIPS SHALL BE USED TO FASTEN AND SUPPORT GROUNDING CONDUCTORS. FERROUS METAL CLIPS WHICH COMPLETELY SURROUND THE GROUNDING CONDUCTOR SHALL NOT BE USED.
12. IF COAX ON ICE BRIDGE IS MORE THAT 6' FROM THE GROUND BAR AT THE BASE OF THE TOWER, A SECOND GROUND BAR WILL BE NEEDED AT THE END OF THE ICE BRIDGE RUN TO GROUND THE COAX GROUND KIT AND THE IN-LINE SURGE ARRESTORS (SURGE ARRESTORS INSTALLED BY LUCENT ONLY HAVE 6' GROUND TAILS).
13. CONTRACTOR SHALL REPAIR/PLACE EXISTING GROUNDING SYSTEM COMPONENTS DAMAGED DURING CONSTRUCTION AT THE CONTRACTORS EXPENSE.
14. DO NOT ALLOW THE COPPER CONDUCTOR TO TOUCH THE GALVANIZED GUY WIRE AT THE CONNECTION POINT OR AT ANY OTHER POINT. NO EXOTHERMICALLY WELDED CONNECTION SHALL BE MADE TO THE GUY WIRE.
15. CONTRACTOR SHALL VERIFY EXISTING SECTOR GROUNDING CONDITION AND GROUND THE PROPOSED EQUIPMENT IN THE SAME MANNER. A PROPOSED SECTOR GROUND BAR SHALL BE INSTALLED IF REQUIRED.

2 GROUNDING BAR DETAIL

SCALE: NONE

NOTES:

1. CONTRACTOR TO VERIFY EXISTENCE AND LOCATIONS OF SECTOR GROUND BARS AND PROVIDE PROPOSED SECTOR GROUND BARS AS REQUIRED.
2. CONTRACTOR TO PROVIDE #2 AWG BARE COPPER DOWN-LEADS FROM PROPOSED SECTOR GROUND BARS TO EXISTING TOWER GROUND BAR.
3. CONTRACTOR SHALL VERIFY ALL PROPOSED/USED/OCCUPIED PIPE MOUNTS ARE GROUNDED BACK TO THE SECTOR GROUND BAR. IF GROUNDING DOES NOT EXIST FROM THE PIPE MOUNT TO THE SECTOR GROUND BAR, CONTRACTOR SHALL FURNISH ALL MATERIALS AS REQUIRED.
4. ALL CABLE CONNECTIONS TO BE WEATHERPROOFED PER MANUFACTURER INSTRUCTION.

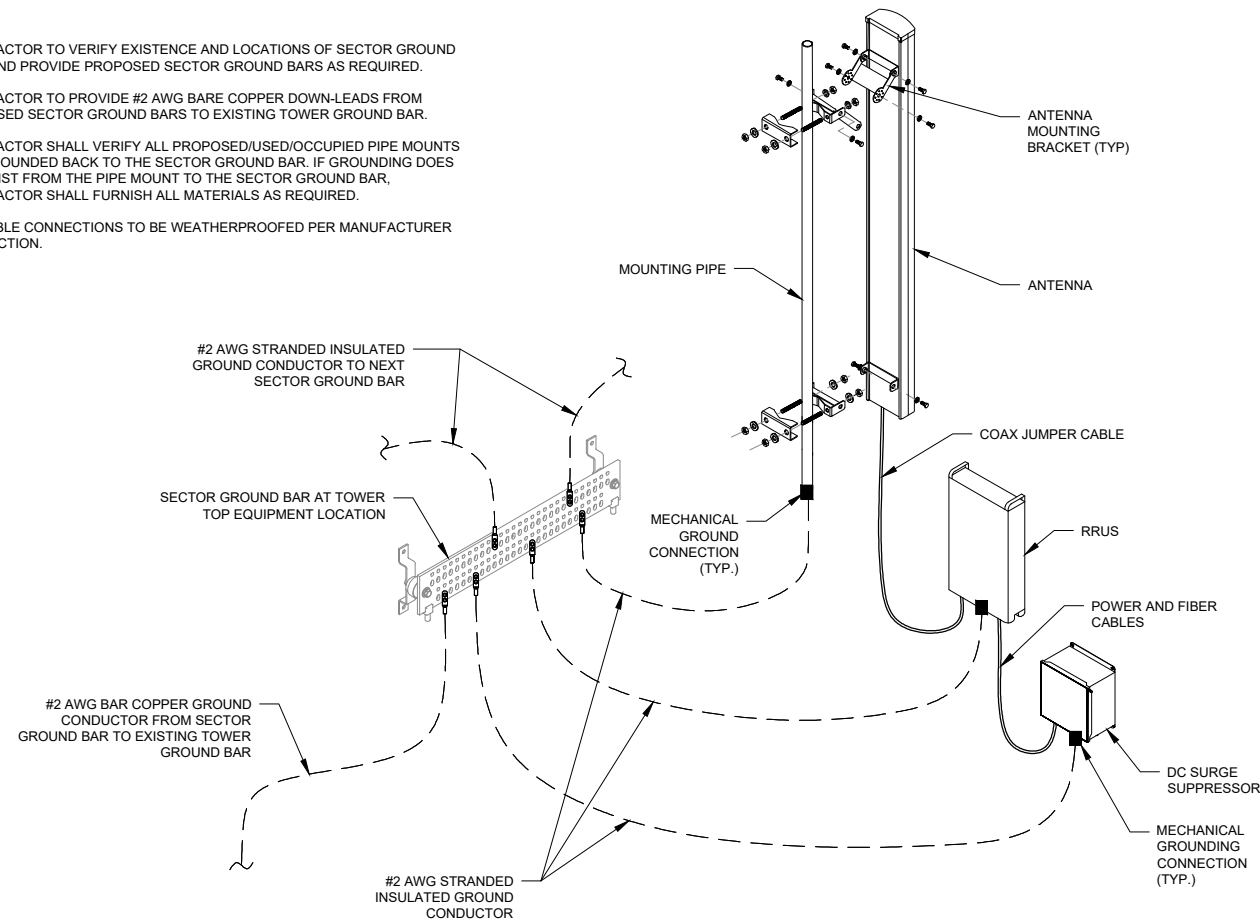

3 TYPICAL ANTENNA GROUNDING SCHEMATIC

SCALE: NONE



5841 BRIDGE STREET
EAST SYRACUSE, NY 13057



3 CORPORATE PARK DRIVE
SUITE 101
CLIFTON PARK, NY 12065



120 ST. JAMES AVENUE, 5TH FLOOR
BOSTON, MA 02116



PROJECT NO: ERCC0004

DRAWN BY: DAP

CHECKED BY: CAT

SUBMITTALS		
0	04/22/19	ISSUED FOR PERMITTING

THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF AT&T WIRELESS. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED. DUPLICATION AND USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.

FA# 10035444
SITE# CT2066
WOODBURY CT GEART
HOLLOW RD
GREAT HOLLOW ROAD
WOODBURY, CT 06798

GROUNDING DETAILS

G-1