

STATE OF CONNECTICUT CONNECTICUT SITING COUNCIL

Ten Franklin Square, New Britain, CT 06051 Phone: (860) 827-2935 Fax: (860) 827-2950 E-Mail: siting.council@ct.gov Web Site: portal.ct.gov/csc

VIA ELECTRONIC MAIL

June 30, 2023

Catherine Conklin General Dynamics Wireless Services 2586 Industry Lane, Ste. 100 Norristown, PA 19403 catherine.conklin@gdit.com

RE: **EM-AT&T-003-230302** – AT&T notice of intent to modify an existing telecommunications facility located at 20 Seles Road, Ashford, Connecticut.

Dear Catherine Conklin:

The Connecticut Siting Council (Council) is in receipt of your correspondence of June 29, 2023 submitted in response to the Council's March 23, 2023 notification of an incomplete request for exempt modification with regard to the above-referenced matter.

The submission renders the request for exempt modification complete and the Council will process the request in accordance with the Federal Communications Commission 60-day timeframe.

Thank you for your attention and cooperation.

Sincerely,

Melanie A. Bachman Executive Director

Melin Beal

MAB/ANM/dll

From: Conklin, Catherine (NE) < Catherine. Conklin@gdit.com>

Sent: Thursday, June 29, 2023 9:15 AM **To:** Fontaine, Lisa <Lisa.Fontaine@ct.gov>

Cc: CSC-DL Siting Council <Siting.Council@ct.gov>

Subject: RE: Council Incomplete Letter - EM-AT&T-003-230302 (Seles Road)- Ashford

Good Morning

See attached revised CDs per your request. You will receive a hard copy via FedEx tomorrow.

Thank you

Catherine Conklin Site Acquisition Specialist

M 301-266-0258
Catherine.Conklin@gdit.com
405 Commerce Park Drive
Cranberry Twp, PA 16066
www.gdit.com

GENERAL DYNAMICS

"The information transmitted is intended only for the person or entity to which it is addressed and may contain confidential and/or privileged information. Any review, retransmission, dissemination or other use of, or taking of any action in reliance upon this information by persons or entities other than the intended recipient is prohibited. If you received this in error, please contact the sender and delete the material from any computer."



SITE NAME: ASHFORD SOUTH CENTRAL FA LOCATION CODE: 10070912

GENERATOR PROJECT 30KW GENERAC DIESEL GENERATOR **200A GENERAC ATS**

20 SELES ROAD ASHFORD, CT 06278

VICINITY MAP SITE LOCATION

SCOPE OF WORK

ADD STANDBY GENERATOR, ASSOCIATED CONCRETE PAD, AND UTILITY EQUIPMENT TO EXISTING AT&T EQUIPMENT AREA. THERE WILL BE NO CHANGE IN THE SIZE OR HEIGHT OF THE TOWER OR ANTENNAS.

TO OBTAIN LOCATION OF PARTICIPANTS' UNDERGROUND FACILITIES BEFORE YOU DIG IN CONNECTICUT

CALL BEFORE YOU DIG 811 OR 1-800-922-4455

CONNECTICUT PUBLIC ACT 87-71 REQUIRES MIN. 2 WORKING DAYS NOTICE BEFORE YOU EXCAVATE.

APPLICABLE BUILDING CODE & STANDARDS

ALL WORK AND MATERIALS SHALL BE PERFORMED AND INSTALLED IN ACCORDANCE WITH THE CURRENT EDITION OF THE FOLLOWING CODES AS ADOPTED BY THE GOVERNING LOCAL AUTHORITIES. NOTHING N THESE PLANS ARE TO BE CONSTRUCTED TO PERMIT WORK NOT CONFORMING TO THESE CODES:

- INTERNATIONAL BUILDING CODE 2021
- . NATIONAL ELECTRIC CODE 2020
- 3. AMERICAN CONCRETE INSTITUTE (ACI) 3 I 8. BUILDING CODE REQUIREMENTS FOR STRUCTURAL
- . AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC), MANUAL OF STEEL CONSTRUCTION
- . TELECOMMUNICATIONS INDUSTRY ASSOCIATION (TIA) 222-G, STRUCTURAL STANDARDS FOR STEEL TOWER AND ANTENNA SUPPORTING STRUCTURES
- 5. TIA 607, COMMERCIAL BUILDING GROUNDING AND BONDING REQUIREMENTS FOR

AERIAL VIEW OF SITE



PROJECT INFORMATION

PROJECT MANAGER

MATTHEW HIGGINS GENERAL DYNAMICS WIRELESS SERVICES

WESTWOOD, MA 02090

Matthew.Higgins@GDIT.com

ENGINEER:

RAMAKER & ASSOCIATES, INC. 855 COMMUNITY DRIVE SAUK CITY, WI 53583 PH: (608) 643-4100 FAX: (608) 643-7999

CONTACT: TYLER BEATTY tbeatty@ramaker.com

APPLICANT INFORMATION: 7 I 50 STANDARD DR HANOVER, MD 21076

SITE NAME: ASHFORD SOUTH CENTRAL FA NUMBER: 10070912

EIP HOLDINGS II, LLC

2 ALLEGHENY CENTER, NOVA TOWER 2 #1002 PITTSBURG, PA 15212

ADDRESS: 20 SELES ROAD ASHFORD, CT 06278

COUNTY: WINDHAM

41.86339° LONG.: -72.18280°

GROUND ELEVATION: 553 FT AMSL

DO NOT SCALE DRAWINGS CONTRACTOR SHALL VERIFY ALL PLANS & EXISTING DIMENSIONS & CONDITIONS ON THE JOB SITE & SHALL IMMEDIATELY NOTIFY THE ENGINEER IN

WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK OR BE RESPONSIBLE FOR SAME.

THE INFORMATION CONTAINED IN THIS SET OF DOCUMENTS IS PROPRIETARY BY NATURE. ANY USE OR DISCLOSURE OTHER THAN THAT WHICH RELATES TO THE CLIENT IS STRICTLY PROHIBITED

SHEET INDEX

GENERAL:

T- I TITLE SHEET

N-I GENERAL NOTES

A-I SITE PLAN

S-I FOUNDATION DETAILS

ELECTRICAL & GROUNDING:

- F-I WIRING DETAILS
- E-2 PANEL AND PENETRATION DETAILS ATS. CONDUIT & GROUND ROD DETAILS
- GENERAC GENERATOR SPECIFICATIONS
- E-4. I GENERAC GENERATOR SPECIFICATIONS
- E-4.2 GENERAC GENERATOR SPECIFICATIONS GENERAC ATS SPECIFICATIONS
- E-5. I GENERAC ATS SPECIFICATIONS

SIGNATURE BLOCK

AT¢T MGR. DATE

DATE GENERAL DYNAMICS CONSTRUCTION MGR

SITE ACQUISITION DATE

Mobility

RAMAKER

(608) 643-4100 www.ramaker.com

CONSULTANT:


PREPARED FOR:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 101 STATION DR WESTWOOD, MA 02090

hereby certify that this plan, specification, or report was prepare y me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of <u>Connecticut</u>.



/////	
	6/28/2023
Signature:	Date:

06/28/23 REVISED CDs IARK DATE DESCRIPTION

ASHFORD SOUTH CENTRAL FA ID # 10070912

DATE 02/24/2023

20 SELES ROAD ASHFORD, CT 06278

TITLE SHEET

SCALE: NONE

57074

T-1

NOTES TO SUBCONTRACTOR:

THE GENERAL SUBCONTRACTOR MUST VERIFY ALL DIMENSIONS. CONDITIONS AND FLEVATIONS BEFORE PROCEEDING WITH THE WORK. ALL WORK SHALL BE PERFORMED IN A WORKMANLIKE MANNER IN ACCORDANCE WITH ACCEPTED CONSTRUCTION PRACTICES.

2. IT IS THE INTENTION OF THESE DRAWINGS TO SHOW THE COMPLETED INSTALLATION. THE SUBCONTRACTOR SHALL BE RESPONSIBLE FOR ALL TEMPORARY BRACING, SHORING, TIES, FORM WORK, ETC. IN ACCORDANCE WITH ALL NATIONAL, STATE, AND LOCAL ORDINANCES, TO SAFELY EXECUTE ALL WORK AND SHALL BE RESPONSIBLE FOR SAME. ALL WORK SHALL BE IN ACCORDANCE WITH LOCAL CODES.

3. THE SUBCONTRACTOR SHALL USE ADEQUATE NUMBER OF SKILLED WORKMAN WHO ARE THOROUGHLY TRAINED AND EXPERIENCED IN THE NECESSARY CRAFTS AND WHO ARE COMPLETELY FAMILIAR WITH THE SPECIFIED REQUIREMENTS AND METHOD NEEDED FOR PROPER PERFORMANCE OF THE WORK

- 4. CONSTRUCTION SUBCONTRACTOR AGREES THAT IN ACCORDANCE WITH GENERALLY ACCEPTED CONSTRUCTION PRACTICES, CONSTRUCTION SUBCONTRACTOR WILL BE REQUIRED TO ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THE PROJECT, INCLUDING THE SAFETY OF ALL PERSONS AND PROPERTY, THAT THIS REQUIREMENT SHALL BE MADE TO APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS AND CONSTRUCTION SUBCONTRACTOR FURTHER AGREES TO INDEMNIFY AND HOLD DESIGN ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED. IN CONNECTION WITH PERFORMANCE OF WORK ON THIS PROJECT.
- . SITE GROUNDING SHALL COMPLY WITH AT&T WIRELESS SERVICES TECHNICAL SPECIFICATIONS FOR FACILITY GROUNDING FOR CELL SITE STANDARDS, LATEST EDITION, AND COMPLY WITH AT\$T TOWERS GROUNDING CHECKLIST, LATEST VERSION. WHEN NATIONAL AND LOCAL GROUNDING CODES ARE MORE STRINGENT THEY SHALL GOVERN. GROUNDING SHALL BE COMPLETED BEFORE ERECTION OF TOWER.
- 3. ALL WORK SHALL COMPLY WITH OSHA AND STATE SAFETY REQUIREMENTS. PROCEDURES FOR THE PROTECTION OF EXCAVATIONS, EXISTING CONSTRUCTION AND UTILITIES SHALL BE ESTABLISHED PRIOR TO FOUNDATION INSTALLATION, IF TEMPORARY LIGHTING AND MARKING IS REQUIRED BY THE FEDERAL AVIATION ADMINISTRATION (FAA), IT IS THE SUBCONTRACTOR'S RESPONSIBILITY TO MAINTAIN THE NECESSARY LIGHTS AND NOTIFY THE PROPER AUTHORITIES IN THE EVENT OF A PROBLEM
- 7. ALL WORK SHALL BE ACCOMPLISHED IN ACCORDANCE WITH ALL LOCAL, STATE, AND FEDERAL CODES OR ORDINANCES. THE MOST STRINGENT CODE WILL APPLY IN THE CASE OF DISCREPANCIES OR DIFFERENCES IN THE CODE REQUIREMENTS.
- 8. ANY DAMAGE TO THE ADJACENT PROPERTIES WILL BE CORRECTED AT THE SUBCONTRACTOR'S EXPENSE TO THE SATISFACTION OF THE LANDOWNER AND THE ENGINEER
- . THE COMPLETE BID PACKAGE INCLUDES THESE CONSTRUCTION DRAWINGS ALONG WITH THE SPECIFICATIONS. SUBCONTRACTOR IS RESPONSIBLE FOR REVIEW OF TOTAL BID PACKAGE PRIOR TO BID SUBMITTAL
- IO. SUBCONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES WITHIN CONSTRUCTION LIMITS PRIOR TO CONSTRUCTION.
- I. THE SUBCONTRACTOR IS RESPONSIBLE FOR MAINTAINING POSITIVE DRAINAGE ON THE SITE AT ALL TIMES. SILT AND EROSION CONTROL SHALL BE MAINTAINED ON THE DOWNSTREAM SIDE OF THE SITE AT ALL TIMES. ANY DAMAGE TO ADJACENT PROPERTIES WILL BE CORRECTED AT THE SUBCONTRACTOR'S EXPENSE.
- 1.2 CLEARING OF TREES AND VEGETATION ON THE SITE SHOULD BE HELD TO A MINIMUM. ONLY THE TREES NECESSARY FOR CONSTRUCTION OF THE FACILITIES SHALL BE REMOVED. ANY DAMAGE TO THE PROPERTY OUTSIDE THE LEASED PROPERTY SHALL BE REPAIRED BY THE SUBCONTRACTOR
- 3. ALL SUITABLE BORROW MATERIAL FOR BACK FILL OF THE SITE SHALL BE INCLUDED IN THE BID. EXCESS TOPSOIL AND UNSUITABLE MATERIAL SHALL BE DISPOSED OF OFF SITE AT LOCATIONS APPROVED BY GOVERNING AGENCIES PRIOR TO DISPOSAL.
- 4. SEEDING AND MULCHING OF THE SITE WILL BE ACCOMPLISHED AS SOON AS POSSIBLE AFTER COMPLETION OF THE SITE DEVELOPMENT. THE SUBCONTRACTOR IS RESPONSIBLE FOR PROVIDING AND MAINTAIN AN ADEQUATE COVER OF VEGETATION OVER THE SITE FOR A ONE YEAR PERIOD
- 15. PERMITS: THE SUBCONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING AND INCURRING THE COST OF ALL REQUIRED PERMITS, INSPECTIONS, CERTIFICATES, ETC.
- 6. RECORD DRAWINGS: MAINTAIN A RECORD OF ALL CHANGES, SUBSTITUTIONS BETWEEN WORK AS SPECIFIED AND INSTALLED. RECORD CHANGES ON A CLEAN SET OF CONTRACT DRAWINGS WHICH SHALL BE TURNED OVER TO THE CONSTRUCTION MANAGER UPON COMPLETION OF THE PROJECT
- 7. THE PLANS SHOW SOME KNOWN SUBSURFACE STRUCTURES, ABOVE GROUND STRUCTURES AND/OR EXISTING UTILITIES BELIEVED TO BE IN THE WORKING AREA. IT IS THE RESPONSIBILITY OF THE SUBCONTRACTOR TO VERIFY ALL UTILITIES, PIPELINES AND OTHER STRUCTURES SHOWN OR NOT SHOWN ON THESE PLANS. THE SUBCONTRACTOR SHALL CONTACT THE LOCAL JURISDICTION'S DIGGER'S HOTLINE BEFORE DIGGING OR DRILLING. ANY DAMAGE TO EXISTING UTILITIES SHALL BE REPAIRED TO THE SATISFACTION OF THE OWNER AND ENGINEER AT THE SUBCONTRACTOR'S EXPENSE.

GENERAL NOTES:

- THIS PROPOSAL IS FOR THE ADDITION OF A NEW GENERATOR ON A CONCRETE PAD TO AN EXISTING UNMANNED TELECOMMUNICATIONS FACILITY CONSISTING OF AN EQUIPMENT SHELTER AND TOWER
- 2. THE PROPOSED FACILITY WILL BE UNMANNED AND DOES NOT REQUIRE POTABLE WATER OR SEWER SERVICE.
- 3. THE PROPOSED FACILITY IS UNMANNED AND IS NOT FOR HUMAN HABITAT. (NO HANDICAP

ACCESS IS REQUIRED)

- 4 OCCUPANCY IS LIMITED TO PERIODIC MAINTENANCE AND INSPECTION APPROXIMATELY 2 TIMES PER MONTH BY AT&T TECHNICIANS.
- 5. OUTDOOR STORAGE AND SOLID WASTE CONTAINERS ARE NOT PROPOSED.
- 6. ALL MATERIAL SHALL BE FURNISHED AND WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS.
- 7. SUBCONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING ANY DAMAGE CAUSED BY THE CONSTRUCTION OPERATION.
- 8. SUBCONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL PERMITS AND INSPECTION REQUIRED FOR CONSTRUCTION.
- 9. SUBCONTRACTOR SHALL REMOVE ALL TRASH AND DEBRIS FROM THE SITE ON A DAILY BASIS

ELECTRICAL NOTES: A. GENERAL

- I. COORDINATE LOCATION AND POWER REQUIREMENTS OF ALL EQUIPMENT WITH AT&T AND EQUIPMENT SUPPLIER PRIOR TO INSTALLATION.
- 2. COORDINATE LOCATION AND REQUIREMENTS FOR ELECTRICAL AND TELEPHONE SERVICES WITH THE PROPERTY REPRESENTATIVE, AT&T AND UTILITY COMPANIES. ROUTING OF CONDUITS MAY BE MODIFIED TO MEET SITE REQUIREMENTS. EXACT CONDUIT ROUTING TO BE DETERMINED IN THE FIELD.
- 3. ALL WIRING AND EQUIPMENT SHOWN ON ELECTRICAL SHEETS SHALL BE FURNISHED AND INSTALLED UNDER ELECTRICAL PORTION OF CONTRACT UNLESS OTHERWISE NOTED
- 4. UNINTERRUPTED ELECTRICAL SERVICE FOR EXISTING EQUIPMENT SHALL BE MAINTAINED DURING THE INSTALLATION OF THE WORK DESCRIBED UNDER THESE DOCUMENTS. TEMPORARY EQUIPMENT, CABLES AND WHATEVER ELSE IS NECESSARY SHALL BE PROVIDED AS REQUIRED TO MAINTAIN ELECTRICAL SERVICE. TEMPORARY SERVICE FACILITIES, IF REQUIRED AT ANY TIME, SHALL NOT BE DISCONNECTED OR REMOVED UNTIL NEW SERVICE EQUIPMENT IS IN PROPER OPERATION. IF ANY SERVICE OR SYSTEM MUST BE INTERRUPTED. THE CONTRACTOR SHALL REQUEST PERMISSION IN WRITING STATING THE DATE, TIME, ETC. THE SERVICE WILL BE INTERRUPTED AND THE AREAS AFFECTED. THIS REQUEST SHALL BE MADE IN SUFFICIENT TIME FOR PROPER ARRANGEMENTS TO BE MADE. WRITTEN PERMISSION SHALL BE OBTAINED FROM THE OWNER BEFORE INTERRUPTING ELECTRICAL SERVICE
- 5. COORDINATE NEW WORK WITH OTHER TRADES AND VERIFY EXISTING CONDITIONS TO AVOID INTERFERENCE. IN CASE OF INTERFERENCE, AT&T'S REPRESENTATIVE WILL DECIDE WHICH WORK IS TO BE RELOCATED, REGARDLESS OF WHICH WAS FIRST INSTALLED.
- 6. THE INSTALLATION MUST COMPLY WITH NEC AND ALL FEDERAL, STATE AND LOCAL RULES AND REGULATIONS.
- 7. THE DRAWINGS ARE DIAGRAMMATIC AND INDICATE THE GENERAL ARRANGEMENT OF SYSTEMS AND EQUIPMENT UNLESS OTHERWISE DEFINED BY DIMENSIONS OR DETAILS. EXACT EQUIPMENT LOCATIONS AND RACEWAY ROUTING SHALL BE GOVERNED BY ACTUAL FIELD CONDITIONS AND/OR DIRECTIONS FROM AT&T'S REPRESENTATIVE.
- 8. CONTRACTOR SHALL PAY ALL PERMITS AND FEES REQUIRED.
- 9. ALL MATERIALS SHALL BE FURNISHED AND WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE APPLICABLE SECTIONS OF THE STANDARDS REFERENCED BELOW:
 - ANSI (AMERICAN NATIONAL STANDARDS INSTITUTE) ASTIM (AMERICAN SOCIETY FOR TESTING MATERIALS)
 - ETL (ELECTRICAL TESTING LABORATORY)
 - ICEA (INSULATED CABLE ENGINEERS ASSOCIATION)
 - IEEE (INSTITUTE OF ELECTRICAL AND ELECTRONIC ENGINEERS)
 - MBFU (NATIONAL BOARD OF FIRE UNDERWRITERS) NESC (NATIONAL ELECTRICAL SAFETY CODE)
 - NEMA (NATIONAL ELECTRICAL MANUFACTURER'S ASSOCIATION)
 - NFPA (NATIONAL FIRE PROTECTION ASSOCIATION)
 - UL (UNDERWRITER'S LABORATORY)
- IO. CONTRACTOR SHALL REVIEW PLANS, DETAILS AND SPECIFICATIONS IN DETAIL AND ADJUST WORK TO CONFORM WITH ACTUAL SITE CONDITIONS SO THAT ELECTRICAL DEVICES AND EQUIPMENT WILL BE LOCATED AND READILY ACCESSIBLE. QUANTITIES LISTED IN MATERIAL LISTS ON THE DRAWINGS ARE FOR INFORMATION ONLY. THE CONTRACTOR SHALL PROVIDE HIS OWN TAKEOFF FOR MATERIAL QUANTITY AND TYPES BASED ON ACTUAL SITE CONDITIONS, IN ADDITION, CONTRACTOR SHALL PROVIDE ALL NECESSARY MATERIALS TO INSTALL EQUIPMENT FURNISHED BY AT&T OR ITS SUPPLIERS. ALL ITEMS NOT SPECIFICALLY MENTIONED HEREIN OR SHOWN ON THE DRAWINGS. BUT WHICH ARE OBVIOUSLY NECESSARY TO MAKE A COMPLETE WORKING INSTALLATION. SHALL BE INCLUDED.
- II. THE CONTRACTOR OR BIDDER SHALL BEAR THE RESPONSIBILITY OF NOTIFYING (IN WRITING) AT\$T'S REPRESENTATIVE OF ANY CONFLICTS PRIOR TO THE SUBMISSION OF CONTRACTOR'S PROPOSAL OR PERFORMANCE OF WORK, IN THE EVENT OF DISCREPANCIES THE CONTRACTOR SHALL PRICE THE MORE COSTLY OR EXTENSIVE WORK, UNLESS DIRECTED IN WRITING OTHERWISE
- I 2. ALL FLOORS WHERE PENETRATIONS ARE REQUIRED IN BUILDING ARE TO BE CORE DRILLED AND THEN FIREPROOFED.

- PROVIDE PULL BOXES AND JUNCTION BOXES WHERE SHOWN OR AS REQUIRED BY CODE SUCH THAT NO MORE THAN THE EQUIVALENT OF FOUR QUARTER BENDS (380 DEGREES TOTAL) EXIST IN A CONDUIT RUN.
- 2. ALL POWER AND CONTROL/INDICATION WIRING SHALL BE TYPE THHN/THWN 800V RATED 75 DEGREES CELSIUS, UNLESS NOTED OTHERWISE.

- 3. SCHEDULE 80 PVC CONDUIT SHALL BE USED ABOVE GROUND, WHERE ABOVE GRADE IS DEFINED AS THE GROUND OF THE TURN-UP
- 4. BELL END OR TERMINAL ADAPTER MUST BE INSTALLED ON END OF PVC CONDUIT PER NEC 352.46. 300.4 F, (3)
- CONDUIT BENDS SHALL BE MADE IN ACCORDANCE WITH NEC TABLE 346-10. NO RIGHT ANGLE DEVICE OTHER THAN STANDARD CONDUIT ELBOWS WITH 12" MINIMUM INSIDE SWEEPS FOR ALL CONDUITS 2" OR LARGER
- 6. POWER WIRING SIZE SHALL NOT BE SMALLER THAN #12 AWG.
- 7. ALL WIRING SHALL BE COPPER, ALUMINUM WILL NOT BE ACCEPTABLE ALL POWER CIRCUITS SHALL CONTAIN A GROUND WIRE.
- 8. PHASE MARKINGS TO BE USED AT POWER CONDUCTOR TERMINATIONS.
- 9. CONTRACTOR SHALL ENSURE INTEGRITY IS MAINTAINED WHEN INSTALLING CONDUIT AND
- 10. INSTALL PULL STRING IN ALL CONDUIT.
- II. FOR ROOFTOP INSTALLS AND BUILD-OUTS, CONDUITS INSIDE BUILDING AND ON ROOF SHALL BE RGS. UNLESS OTHERWISE NOTED. FOR RAW LAND SITES AND CO-LOCATES. PVC SCHEDULE 80 SHALL BE UTILIZED UNLESS NOTED OTHERWISE.
- 12. MAINTAIN MINIMUM 1'-0" VERTICAL AND 1'-0" HORIZONTAL SEPARATIONS FROM ANY MECHANICAL GAS PIPING.
- 1.3 ALL WIRING ROUTED IN PLENUM TO BE RATED OR IN METALLIC FLEX (LIQUIDITE) CONDUIT

C. EQUIPMENT

- EQUIPMENT/PARTS CONNECTED TO EXISTING PANELS, DUCTS, ETC. SHALL MATCH THE CHARACTERISTICS (A/C, V, A) OF THAT EQUIPMENT.
- 2. ALL ELECTRICAL EQUIPMENT OUTSIDE SHALL BE NEMA OR 3R RATED

- ALL GROUND CONNECTIONS TO BUILDING SHALL BE MADE USING TWO-HOLE CONNECTORS PROVIDE STAINLESS STEEL BOLTS AND LOCK WASHERS ON ALL MECHANICAL GROUND CONNECTIONS.
- ALL EQUIPMENT SURFACES TO BE BONDED TO GROUNDING SYSTEM SHALL BE STRIPPED OF ALL PAINT AND DIRT. CONNECTIONS TO VARIOUS METALS SHALL BE OF A TYPE AS TO CAUSE A GALVANIC OR CORROSIVE REACTION. AREA SHALL BE REPAINTED FOLLOWING
- 3. ANY METALLIC ITEM WITHIN 6' OF GROUND CONDUCTORS MUST BE CONNECTED TO THE GROUNDING SYSTEM
- 4. EXTERIOR, ABOVE GRADE GROUND CONNECTIONS SHALL BE FURNISHED WITH A LIBERAL PROTECTIVE COATING OF ANTI-OXIDE COMPOUND.
- ALL MATERIALS AND LABOR REQUIRED FOR THE GROUNDING SYSTEM AS INDICATED ON THE PLANS AND DETAILS, AND AS DESCRIBED HEREIN SHALL BE FURNISHED BY THIS CONTRACTOR UNLESS OTHERWISE NOTED.
- EXACT LOCATION OF GROUND CONNECTION POINTS SHALL BE DETERMINED IN FIELD. ADJUST LOCATIONS INDICATED ON PLANS ACCORDING TO ACTUAL EQUIPMENT LOCATIONS TO KEEP THE GROUND CONNECTION CABLES AS SHORT AS PRACTICAL
- PROVIDE ALL ELECTRICAL SYSTEM AND EQUIPMENT GROUNDS AS REQUIRED BY THE CURRENT EDITION OF THE NATIONAL ELECTRIC CODE AND THE CURRENT EDITION OF THE NATIONAL ELECTRICAL SAFETY CODE. BONDING JUMPERS WITH APPROVED GROUND FITTINGS SHALL BE INSTALLED AT ALL RACEWAYS, EQUIPMENT ENCLOSURES, PULL BOXES ETC. TO MAINTAIN GROUND CONTINUITY WHERE REQUIRED BY CODE
- 8. ALL EQUIPMENT GROUND CONDUCTORS SHALL BE TIN COATED, #2 AWG COPPER UNLESS NOTED OTHERWISE ON THE DRAWINGS
- PROVIDE PRE AND POST GROUND TEST RESULTS, USING CLAMP-ON TESTER. TEST RESULTS SHALL BE PHOTOS WITH DIGITAL TIME AND GPS STAMPED/EMBEDDED.

E. INSPECTION/DOCUMENTATION

- THE CONTRACTOR, UPON COMPLETION OF HIS WORK, SHALL PROVIDE AS-BUILT DRAWINGS INFORMATION SHOULD BE GIVEN TO THE GENERAL CONTRACTOR FOR INCLUSION IN FINAL AS-BUILT SURVEY DOCUMENTS TO BE GIVEN TO THE OWNER.
- CONTRACTOR SHALL SUPPLY DOCUMENTATION ATTESTING TO THE COMPLETE GROUND SYSTEM'S RECEPTIVITY (MAX. 5 OHMS).
- 3. AN ELECTRICAL INSPECTION SHALL BE MADE BY AND INSPECTING AGENCY APPROVED BY AT\$T'S REPRESENTATIVE. CONTRACTOR SHALL COORDINATE ALL INSPECTIONS AND OBTAIN POWER COMPANY APPROVAL
- 4. CONTRACTOR SHALL HAVE ATS AND GENERATOR RELAY INSTALLATION AND CONNECTIONS INSPECTED BY OTHERS TO ENSURE THAT ULLISTING FOR THAT EQUIPMENT IS NOT VOIDED



PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 101 STATION DR WESTWOOD, MA 02090

hereby certify that this plan, specification, or report was prei me or under my direct supervision and that I am a duly License ional Engineer under the la ws of the State of Connecticut



6/28/2023

06/28/23 REVISED CD: MARK DATE DESCRIPTION

ASHFORD SOUTH CENTRAL FA ID # 10070912


DATE 02/24/2023

20 SELES ROAD ASHFORD, CT 06278

GENERAL NOTES

SCALE: NONE

57074 N- I

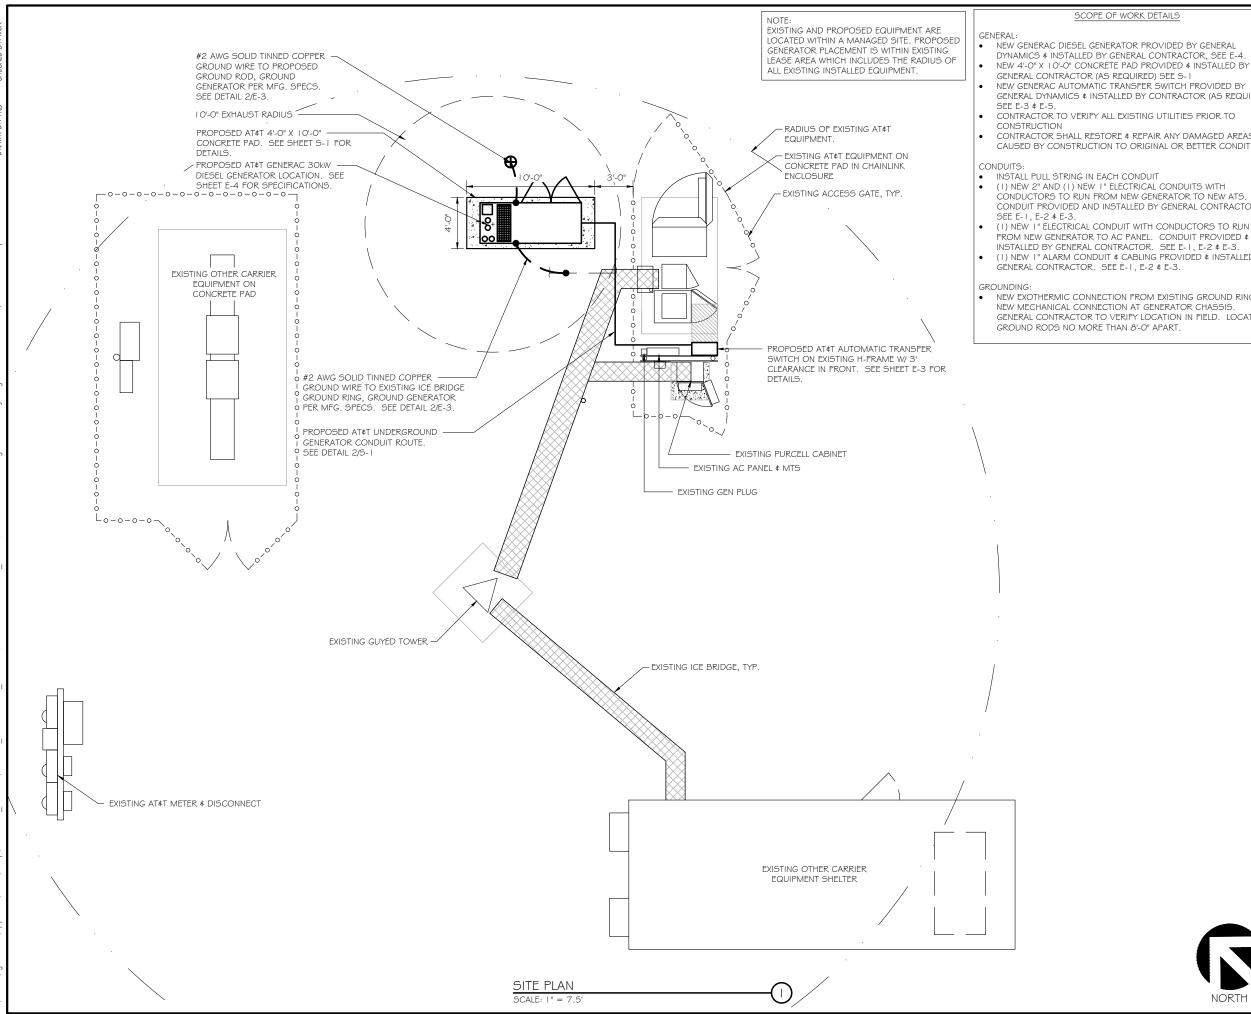

- NEW GENERAC DIESEL GENERATOR PROVIDED BY GENERAL
- GENERAL DYNAMICS & INSTALLED BY CONTRACTOR (AS REQUIRED)
- CONTRACTOR SHALL RESTORE \$ REPAIR ANY DAMAGED AREAS CAUSED BY CONSTRUCTION TO ORIGINAL OR BETTER CONDITION
- (1) NEW 2" AND (1) NEW 1" ELECTRICAL CONDUITS WITH CONDUCTORS TO RUN FROM NEW GENERATOR TO NEW ATS. CONDUIT PROVIDED AND INSTALLED BY GENERAL CONTRACTOR.
- (I) NEW I" ELECTRICAL CONDUIT WITH CONDUCTORS TO RUN FROM NEW GENERATOR TO AC PANEL. CONDUIT PROVIDED \$ INSTALLED BY GENERAL CONTRACTOR. SEE E-1, E-2 & E-3.
- (I) NEW I" ALARM CONDUIT & CABLING PROVIDED & INSTALLED BY GENERAL CONTRACTOR. SEE E-1, E-2 & E-3.

 NEW EXOTHERMIC CONNECTION FROM EXISTING GROUND RING TO NEW MECHANICAL CONNECTION AT GENERATOR CHASSIS. GENERAL CONTRACTOR TO VERIFY LOCATION IN FIELD. LOCATE GROUND RODS NO MORE THAN 8'-O" APART.



PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 101 STATION DR WESTWOOD, MA 02090

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensed



I 06/28/23 REVISED CDs MARK DATE DESCRIPTION DATE 02/24/2023


ASHFORD SOUTH CENTRAL FA ID # 10070912

20 SELES ROAD ASHFORD, CT 06278

SITE PLAN

0	3.7	75' I	7.	5' I		15
11" x 22" x			" = 3 " = 3	7.5' 3.75'		
PROJECT NUMBER	Ţ		ļ	570	74	
SHEET NUMBER				A- I		



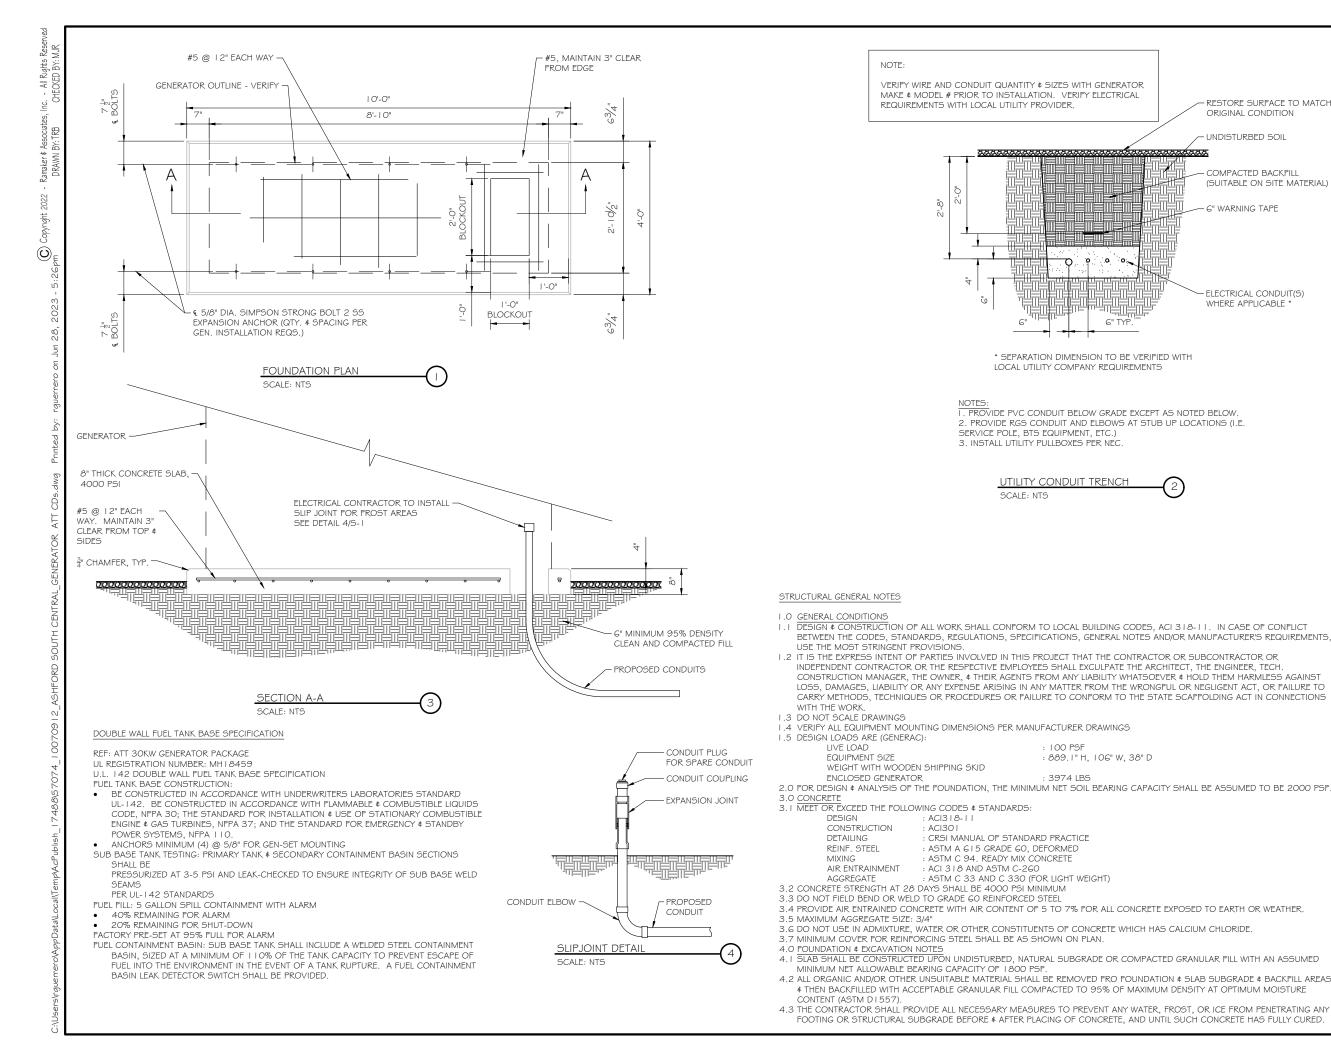

RESTORE SURFACE TO MATCH ORIGINAL CONDITION UNDISTURBED SOIL COMPACTED BACKFILL (SUITABLE ON SITE MATERIAL) 6" WARNING TAPE ELECTRICAL CONDUIT(S) WHERE APPLICABLE * CONSULTANT: MARK DATE DESCRIPTION

RAMAKER (608) 643-4100 www.ramaker.com PREPARED FOR:



GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 101 STATION DR WESTWOOD, MA 02090

hereby certify that this plan, specification, or report was preme or under my direct supervision and that I am a duly Licensed sional Engineer under the laws of the State of <u>Connecticut</u>.



I 06/28/23 REVISED CDs

DATE 02/24/2023

ASHFORD SOUTH CENTRAL FA ID # 10070912

20 SELES ROAD ASHFORD, CT 06278

FOUNDATION DETAILS

SCALE: NONE

57074 5-1

DIAGRAM	CIRC	UIT S	5CHE	DUL	Ξ


NO.	FROM	TO	WIRES	GROUND	CONDUIT SIZE	FUNCTION
	NORMAL POWER SOURCE	AUTOMATIC TRANSFER SWITCH	(3) 3/0	(1) #4	2"	NORMAL POWER FEEDER TO ATS (CUT BACK EXISTING)
2	AUTOMATIC TRANSFER SWITCH	LOAD CENTER	(3) 3/0	(1) #4	2"	POWER FEEDER FROM ATS TO PANEL
3	GENERATOR	AUTOMATIC TRANSFER SWITCH	(3) #1	(1) #6	1-1/2"	EMERGENCY POWER FEEDER TO ATS
4	AUTOMATIC TRANSFER SWITCH	GENERATOR	(2) #10	(1) #10	1"	START CIRCUIT
5	LOAD CENTER (DISTRIBUTION CENTER)	GENERATOR, ATS	(2) #12 (2) #12 (2) #12	(I) #I2 (I) #I2 (I) #I2	n n n	CIRCUIT FOR GENERATOR BLOCK HEATER \$ BATTERY HEATER CIRCUIT FOR BATTERY CHARGER CIRCUIT FOR ATS
6	GENERATOR	AUTOMATIC TRANSFER SWITCH	I 2-PAIR 24 AWG OR 2EA G-PAIR CAT5	N/A	Ι"	ALARM CABLES (I) I 2 PAIR 24 AWG. PROVIDE 24" OF SLACK CABLE. FINAL PUNCH DOWN IS BY AT\$T TECH. LABEL ALL WIRES
7	AUTOMATIC TRANSFER SWITCH	ALARM BLOCK	I 2-PAIR 24 AWG OR 2EA G-PAIR CAT5	N/A	1"	ALARM CABLES (I) I 2 PAIR 24 AWG (RUN TO PURCELL CABINET & INTO ALARM BOX). PROVIDE 24" OF SLACK CABLE. FINAL PUNCH DOWN IS BY AT&T TECH. LABEL ALL WIRES

ALARM WIRE IDENTIFICATION CHART

WIRE	ALARM	
BROWN BROWN / WHITE	GENERATOR RUNNING	
GREEN GREEN / WHITE	CRITICAL FAULT	
BLUE BLUE / WHITE	MINOR FAULT	
ORANGE ORANGE / WHITE	LOW FUEL	
BROWN * BROWN / WHITE *	FUEL LEAK	
*CAT5 CABLE ONLY, FROM 2ND CAT5 CABLE		

CIRCUIT DETAIL

ALARM WIRING IDENTIFICATION CHART (2)

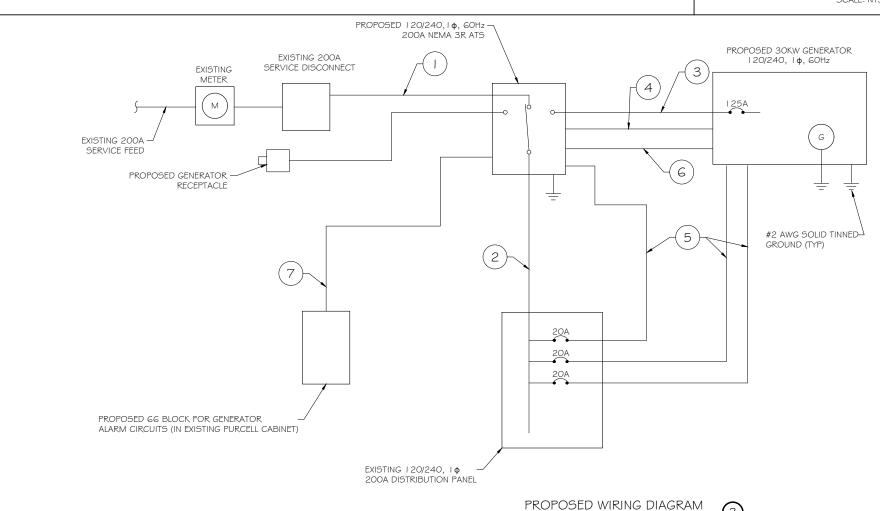

SCALE: NTS



PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 101 STATION DR WESTWOOD, MA 02090



I 06/28/23 REVISED CD₅ MARK DATE DESCRIPTION

ASHFORD SOUTH CENTRAL

DATE | 02/24/2023

FA ID # 10070912 PROJECT INFORMATION: 20 SELES ROAD

ASHFORD, CT 06278

WIRING DETAILS

SCALE: NONE

57074 E- I

PROPOSED 2P BREAKER FOR PROPOSED SUBPANEL, -SEE DETAIL 1 a/E-2. (SQUARE D QO LOAD CENTER RECOMMENDED)

	AC Distribution Panel - Layout Diagram								
Breaker	Breaker				Breaker	Breaker			
Position	Type	On/Off	Size	Circuit Label	Position	Type	On/Off	Size	Circuit Label
3	2P	ON	40	RECTIFIER #1	2	2P	ON	30	SURGE PROTECTOR
5 7	2P	ON	40	RECTIFIER #2	8	2 P	ON	100	SUB-PANEL
9	2P	ON	40	RECTIFIER #3	10 12	2P	ON	40	RECTIFIER #4
13 15	2P	ON	40	NEW POWER PLANT RECTIFIER #1	14 16	2P	ON	40	NEW POWER PLANT RECTIFIER #5
17 19	2P	ON	40	NEW POWER PLANT RECTIFIER #2	18 20	I 2P	ON	40	NEW POWER PLANT RECTIFIER #6
21	2P	ON	40	NEW POWER PLANT RECTIFIER #3	22	1P	ON	30	NEW POWER PLANT HEATER/GFI
23				INCOMPLETE IN	24	1P	ON	20	PANEL OUTLET

EXISTING PANEL SCHEDULE

(I) CIRCUIT RELOCATED FROM POSITION 6/8 OF -EXISTING AC PANELBOARD


AC Distribution Panel - Layout Diagram								
Breaker				Breaker	Breaker			
Type	On/Off	Size	Circuit Label	Position	Type	On/Off	Size	Circuit Label
↓ 1 P	ON	20	ATS	2	חב	OLL	60	UMTS
1P	ON	20	BLOCK HEATER	4	ZP	OFF	00	UIVIT3
_1P	ON	20	BATTERY CHARGER	6				
				8				
				10				
				12				
	Type 1P 1P 1P	Type On/Off 1P ON 1P ON 1P ON	Type On/Off Size 1P ON 20 1P ON 20 1P ON 20 1P ON 20	Breaker Type On/Off Size Circuit Label 1P ON 20 ATS 1P ON 20 BLOCK HEATER 1P ON 20 BATTERY CHARGER	Breaker Type On/Off Size Circuit Label Position 1P ON 20 ATS 2 1P ON 20 BLOCK HEATER 4 1P ON 20 BATTERY CHARGER 6 8 8 10	Type On/Off Size Circuit Label Position Type 1P ON 20 ATS 2 2P 1P ON 20 BLOCK HEATER 4 4 1P ON 20 BATTERY CHARGER 6 8 10 10 10 10 10 10	Breaker Type On/Off Size Circuit Label Breaker Position Type On/Off 1P ON 20 ATS 2 2P OFF 1P ON 20 BLOCK HEATER 4 2P OFF 1P ON 20 BATTERY CHARGER 6 8 10	Breaker Type

PROPOSED 20A BREAKERS FOR ATS, BLOCK HEATER AND BATTERY CHARGER ON NEW AT&T GENERATOR

PROPOSED SUBPANEL SCHEDULE

NOTE:
CONTRACTOR TO LABEL WIRES WITH P-TOUCH OR
SIMILAR LABELS ONLY. ABSOLUTELY NO HANDWRITTEN LABELS.

*CONTRACTOR TO UTILIZE NEXT AVAILABLE IN SEQUENCE SINGLE BREAKER POSITION FOR GENERATOR, BATTERY CHARGER, BATTERY HEATER AND BLOCK HEATER

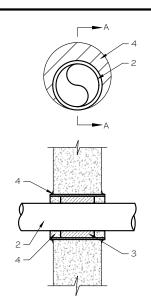

- IF EXISTING CONSTRUCTION VARIES FROM THIS DETAIL, AN EQUAL 3-HR U.L. PENETRATION APPROPRIATE FOR THE EXISTING WALL TYPE SHALL BE CONSTRUCTED
- GC SHALL USE NON-SHRINKING CAULK TO WEATHERSEAL ALL PENETRATIONS INTO OR THRU SHELTER WALL.

U.L. SYSTEM NO. C-AJ-1150 CONDUIT THROUGH BEARING WALL SIMILAR TO U.L. DESIGN NO. U902 F RATING = 3 HR T RATING = O HR

- FLOOR OR WALL ASSEMBLY: MINIMUM 4-1/2" THICK REINFORCED LIGHTWEIGHT OR NORMAL WEIGHT (100-150 PCF) CONCRETE. WALL MAY ALSO BE CONSTRUCTED OF ANY UL CLASSIFIED CONCRETE BLOCKS*. MAX DIAMETER OF OPENING IS 4". SEE CONCRETE BLOCKS 9CATZ) CATEGORY IN THE FIRE RESISTANCE DIRECTORY FOR NAMES OF MANUFACTURERS.
- 2. THROUGH PENETRATIONS : ONE METALLIC PIPE OR CONDUIT TO BE RIGIDLY SUPPORTED ON BOTH SIDES OF FLOOR OR WALL ASSEMBLY. THE ANNULAR SPACE SHALL BE MINIMUM O". (POINT CONTACT) TO MAXIMUM 1-3/8". THE FOLLOWING TYPES AND SIZES
 - OF METALLIC PIPES OR CONDUITS MAY BE USED: A. STEEL PIPE-NOMINAL 6" DIAMETER (OR SMALLER) SCHEDULE 40 (OR HEAVIER)
 - B. IRON PIPE-NOMINAL 6" DIAMETER (OR SMALLER) CAST OR DUCTILE IRON PIPE. C. CONDUIT - NOMINAL 4" DIAMETER (OR SMALLER) STEEL ELECTRICAL METALLIC TUBING OR NOMINAL 3-1/2" DIAMETER (OR SMALLER) STEEL CONDUIT.
- 3. PACKING MATERIAL: MINIMUM 6" THICKNESS OF MIN 4.0 PCF MINERAL WOOL BATTING INSULATION FIRMLY PACKED INTO OPENING AS A PERMANENT FORM. PACKING MATERIAL TO BE RECESSED FROM TOP SURFACE OF FLOOR OR FROM BOTH SURFACES OF WALL AS REQUIRED TO ACCOMMODATE THE REQUIRED THICKNESS OF FILL
- 4. FILL, VOID, OR CAVITY MATERIAL*: SEALANT: MINIMUM 1/4" THICKNESS OF FILL MATERIAL APPLIED WITHIN THE ANNULUS, FLUSH WITH TOP SURFACE OF FLOOR AND WITH BOTH SURFACES OF WALL. AT THE POINT CONTACT LOCATION BETWEEN PIPE AND CONCRETE, A MINIMUM 1/2" DIAMETER BEAD OF FILL MATERIAL SHALL BE APPLIED AT THE CONCRETE/PIPE INTERFACE ON THE TOP SURFACE OF FLOOR AND ON BOTH SURFACES OF WALL. W RATING APPLIES ONLY WHEN CPGO IS OR CPGO4 SEALANT IS

HILTI CONSTRUCTION CHEMICALS, DIV OF HILTI INC. : CP601S, CP604, CP606, OR FS-ONE SEALANT.

* BEARING THE UL CLASSIFICATION MARK

OUTER WALL PENETRATION DETAIL (IF APPLICABLE)



Type VN

TAP TO VERTICAL STEEL

SURFACE OR

THE SIDE OF

HORIZONTAL PIPE

HORIZONTAL CABLE

CABLE TAP TO TOP OF GROUND



GROUND ROD



Type VS CABLE TAP DOWN AT 45°TO VERTICAL STEEL SURFACE OR SIDE OF HORIZONTAL OR VERTICAL PIPE.



THROUGH CABLE TO SIDE OF GROUND ROD



Type VV THROUGH VERTICAL VERTICAL STEEL SURFACE OR TO THE SIDE OF EITHER HORIZONTAL OR VERTICAL PIPE



HORIZONTAL CABLE TAP TO HORIZONTAL STEEL SURFACE OR PIPE.
CABLE OFF SURFACE.



GROUND ROD



Туре ТА TEE OF HORIZONTAL RUN

AND TAP CABLES.

CABLE TAP TO



PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 101 STATION DR WESTWOOD, MA 02090

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensed



I 06/28/23 REVISED CDs

MARK DATE DESCRIPTION

ASHFORD SOUTH CENTRAL FA ID # 10070912

DATE 02/24/2023

20 SELES ROAD ASHFORD, CT 06278

PANEL AND PENETRATION **DETAILS**

SCALE: NONE

57074 E-2

CADWELD DETAILS

CONDUIT (TYP)

2

BUTTERFLY CLAMP AS REQUIRED

(3)


EXISTING WALL/CEILING

(4

VERTICAL "UNISTRUT" P I 000 T' SERIES LENGTH BASED ON NUMBER OF CONDUIT TO BE MOUNTED

WALL CONSTRUCTION TYPE	USE
HOLLOW	3/8" DIA. TOGGLE BOLT
HOLLOW, AT STUD	3/8" DIA. LAG SCREW
CONCRETE BLOCK (HOLLOW)	3/8" DIA. HILTI HY-20 WITH SCREEN, MINIMUM EMBEDMENT 2-1/2"
CONCRETE (SOLID)	3/8" DIA. HILTI HY-150 WITH SCREEN MINIMUM EMBEDMENT 2-1/2"

NOTE: USE GALVANIZED OR STAINLESS STEEL HARDWARE FOR WALL MOUNT \$ CONNECTIONS OF CHANNELS SPACE UNITS @ 5'-O" O.C. LENGTH OF RUN

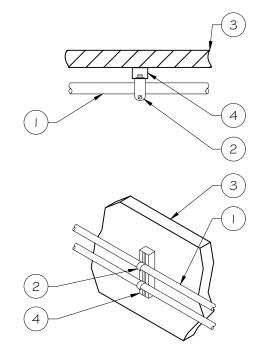

SCALE: NTS

- CADWELD - GRADE #2 AWG BCW GROUND RING ₽ GROUND ROD COPPERWELD 5/8"Ø x 8'-0" LONG (MAX)

SCALE: NTS

GROUND ROD DETAIL

THE LENGTH OF ROD SEE RESISTIVITY REPORT FOR VERIFICATION AS AVAILABLE A LARGER CONDUCTOR SHALL BE REQUIRED IN AREAS HIGHLY PRONE TO LIGHTNING AND/OR AREAS WITH HIGHLY ACIDIC SOIL

GROUND RODS INSTALLED WITHIN CLOSE PROXIMITY TO TOWER OR WHEN SOIL IS AT OR BELOW 2,000 OHM-CM, SHALL BE GALVANIZED TO PREVENT GALVANIC CORROSION OF TOWER, (SEE ANSI/TIA-EIA-222-G)

GROUND RODS MAY BE:

- COPPER CLAD STEEL - SOLID COPPER GROUND RODS SHALL HAVE A MAXIMUM SPACING TWICE


PROVIDE (I) GROUND LEAD TO EACH SIDE OF THE GENERATOR

CONDUIT WALL MOUNT

SCALE: NTS		,

WALL CONSTRUCTION TYPE	USE
HOLLOW	3/8" DIA. TOGGLE BOLT
HOLLOW, AT STUD	3/8" DIA. LAG SCREW
CONCRETE BLOCK (HOLLOW)	7/16" DIA. HILTI HY-20 WITH SCREEN MINIMUM EMBEDMENT 2-1/2"
CONCRETE (SOLID)	7/1 G" DIA. HILTI HY-150 WITH SCREEN MINIMUM EMBEDMENT 2-1/2"

- . USE GALVANIZED OR STAINLESS STEEL HARDWARE FOR WALL MOUNT AND CONNECTION OF CHANNELS
- 2. GC SHALL USE NON-SHRINKING CAULK TO WEATHER SEAL ALL PENETRATIONS INTO OR THROUGH SHELTER WALL

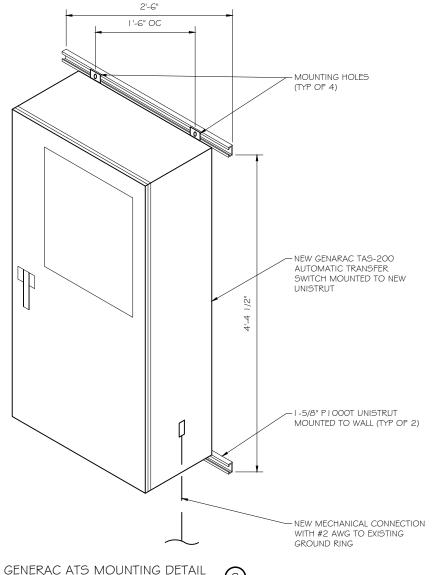



PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 101 STATION DR WESTWOOD, MA 02090

hereby certify that this plan, specification, or report was prepare, by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Connecticut.



I 06/28/23 REVISED CDs MARK DATE DESCRIPTION

ASHFORD SOUTH CENTRAL FA ID # 10070912


DATE 02/24/2023

20 SELES ROAD ASHFORD, CT 06278

ATS, CONDUIT & GROUND ROD DETAILS

SCALE: NONE

57074 E-3

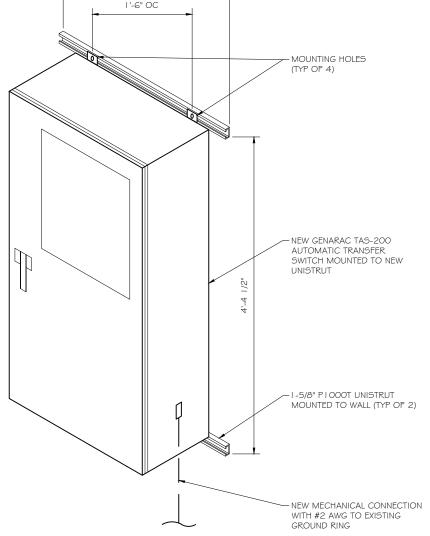









NEMA ICS10, MG1, 250, ICS6, AB1



ANSI C62.41

GENERAC INDUSTRIAL

Standby Power Rating 30 kW, 38 kVA, 60 Hz

SD030 | 2.2L | 30 kW

EPA Certified Stationary Emergency

INDUSTRIAL DIESEL GENERATOR SET

Prime Power Rating* 27 kW, 34 kVA, 60 Hz



Image used for illustration purposes only

Codes and Standards

Not all codes and standards apply to all configurations. Contact factory for details.



*EPA Certified Prime ratings are not available in the US or its Territories

UL2200, UL508, UL489, UL142



CSA C22.2



BS5514 and DIN 6271



NFPA 37, 70, 99, 110



NEC700, 701, 702, 708



ISO 3046, 7637, 8528, 9001



Powering Ahead

For over 50 years, Generac has provided innovative design and superior manufacturing.

Generac ensures superior quality by designing and manufacturing most of its generator components. including alternators, enclosures and base tanks, control systems and communications software.

Generac gensets utilize a wide variety of options, configurations and arrangements, allowing us to meet the standby power needs of practically every application.

Generac searched globally to ensure the most reliable engines power our generators. We choose only engines that have already been proven in heavy-duty industrial applications under adverse conditions.

Generac is committed to ensuring our customers' service support continues after their generator purchase.

SD030 | 2.2L | 30 kW INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency

STANDARD FEATURES

ENGINE SYSTEM

- Oil Drain Extension Air Cleaner
- Fan Guard
- · Stainless Steel Flexible Exhaust Connection Factory Filled Oil and Coolant
- Radiator Duct Adapter (Open Set Only)
- Critical Silencer (Enclosed Unit Only)
- · Engine Coolant Heater

Fuel System

- Fuel Lockoff Solenoid
- Primary Fuel Filter

Cooling System

- Closed Coolant Recovery System
- UV/Ozone Resistant Hoses · Factory-Installed Radiator
- · Radiator Drain Extension
- 50/50 Ethylene Glycol Antifreeze

Electrical System

· Battery Charging Alternator

CONTROL SYSTEM

- Battery Cables
- Battery Tray
- Rubber-Booted Engine Electrical Connections
- Solenoid Activated Starter Motor

ALTERNATOR SYSTEM

- UL2200 GENprotect[™]
- Class H Insulation Material
- 2/3 Pitch Skewed Stator
- Brushless Excitation
- Sealed Bearing
- Rotor Dynamically Spin Balanced
- Amortisseur Winding (3-Phase Only)
- Full Load Capacity Alternator Protective Thermal Switch

GENERATOR SET

- Internal Genset Vibration Isolation
- . Separation of Circuits High/Low Voltage
- Separation of Circuits Multiple Breakers
- Wrapped Exhaust Piping
- Standard Factory Testing
- 2 Year Limited Warranty (Standby Rated Units)
- 1 Year Limited Warranty (Prime Rated Units)
- Silencer Mounted in the Discharge Hood (Enclosed Unit Only)

ENCLOSURE (If Selected)

- High Performance Sound-Absorbing Material
- Gasketed Doors
- Stamped Air-Intake Louvers
- Upward Facing Discharge Hoods (Radiator and Exhaust)
- Stainless Steel Lift Off Door Hinges
- Stainless Steel Lockable Handles
- RhinoCoat™ Textured Polyester Powder Coat Paint

FUEL TANKS (If Selected)

- Double Wall
- Normal and Emergency Vents
- Sloped Top
- Factory Pressure Tested
- Fuel Level
- RhinoCoat™ Textured Polyester Powder Coat Paint
- Stainless Steel Hardware

GENERAC

Digital H Control Panel- Dual 4x20 Display

Program Functions

- Programmable Crank Limiter
- 7-Day Programmable Exerciser
- Special Applications Programmable Logic Controller
- RS-232/485 Communications
- · All Phase Sensing Digital Voltage Regulator · 2-Wire Start Capability
- Date/Time Fault History (Event Log) · Isochronous Governor Control
- · Waterproof/Sealed Connectors

- · Audible Alarms and Shutdowns
- Not in Auto (Flashing Light)
- Auto/Off/Manual Switch
- E-Stop (Red Mushroom-Type) NFPA110 Level I and II (Programmable)
- Customizable Alarms, Warnings, and Events Modbus[®] Protocol
- · Predictive Maintenance Algorithm
- Sealed Boards Password Parameter Adjustment Protection
- Single Point Ground
- 16 Channel Remote Trending
- 0.2 msec High Speed Remote Trending
- Alarm Information Automatically Annunciated on the Display

Full System Status Display

- Power Output (kW)
- Power Factor
- · kW Hours, Total, and Last Run
- Real/Reactive/Apparent Power
- · All Phase AC Voltage All Phase Currents

- · Battery Voltage Frequency

Alarms and Warnings

- Oil Pressure
- Coolant Level
- Snap Shots of Key Operation Parameters During Alarms and Warnings
- Alarms and Warnings Spelled Out (No Alarm Codes)

 Rust-Proof Fasteners with Nylon Washers to Protect Finish

GENERAC | INDUSTRIAL

- (Sound Attenuation Enclosures)

- UL 142/ULC S601
- Sloped Bottom
- Rupture Basin Alarm
- Check Valve In Supply and Return Lines
- · Oil Pressure
- Coolant Temperature Coolant Level
- Engine Speed

- Coolant Temperature Engine Overspeed
- Battery Voltage
- Alarms and Warnings Time and Date Stamped

(608) 643-4100 www.ramaker.com PREPARED FOR:

RAMAKER

CONSULTANT:

GENERAL DYNAMICS Information Technology, Inc.

GENERAL DYNAMICS 101 STATION DR WESTWOOD, MA 02090

me or under my direct supervision and that I am a duly License



DATE 02/24/2023

ASHFORD SOUTH CENTRAL FA ID # 10070912

20 SELES ROAD

ASHFORD, CT 06278

GENERAC 30KW GENERATOR **SPECIFICATIONS**

SCALE: NONE

I 06/28/23 REVISED CDs

RK DATE DESCRIPTION

57074 F-4

GENERAC 30KW GENERATOR SPECIFICATIONS

SD030 | 2.2L | 30 kW

INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency

CONFIGURABLE OPTIONS

ENGINE SYSTEM

- Oil Heater
- O Critical Silencer (Open Set Only)
- Radiator Stone Guard
- O Level 1 Fan and Belt Guards (Open Set Only)

FUEL SYSTEM

NPT Flexible Fuel Line

ELECTRICAL SYSTEM

- O 10A UL Listed Battery Charger
- Battery Warmer

ALTERNATOR SYSTEM

- Alternator Upsizing
- O Anti-Condensation Heater
- Tropical Coating
- O Permanent Magnet Excitation

GENERATOR SET

- Extended Factory Testing
- O 8 Position Load Center
- Pad Vibration Isolation

ENGINEERED OPTIONS

ENGINE SYSTEM

- Coolant Heater Isolation Ball Valves
- Fluid Containment Pan

CONTROL SYSTEM

- O Spare Inputs (x4) / Outputs (x4)
- O Battery Disconnect Switch

CIRCUIT BREAKER OPTIONS

- O Main Line Circuit Breaker
- 2nd Main Line Circuit Breaker O Shunt Trip and Auxiliary Contact
- O Electronic Trip Breakers

ENCLOSURE

- O Weather Protected Enclosure
- Level 1 Sound Attenuation
- O Level 2 Sound Attenuation
- O Level 2 Sound Attenuation with Motorized Dampers Steel Enclosure
- Aluminum Enclosure
- O Up to 200 MPH Wind Load Rating (Contact Factory for Availability)
- AC/DC Enclosure Lighting Kit
- Door Alarm Switch
- Enclosure Heater O Damper Alarm Contacts

WARRANTY (Standby Gensets Only)

- O 2 Year Extended Limited Warranty
- 5 Year Limited Warranty
- O 5 Year Extended Limited Warranty O 7 Year Extended Limited Warranty

O 10 Year Extended Limited Warranty

ALTERNATOR SYSTEM

- O 3rd Breaker System
- **GENERATOR SET**
- O Special Testing

FUEL TANKS

- O UL2085 Tank
- Stainless Steel Tanks

GENERAC INDUSTRIAL

O NFPA 110 Compliant 21-Light Remote Annunciator

O Remote E-Stop (Break Glass-Type, Surface Mount) O Remote E-Stop (Red Mushroom-Type,

Remote E-Stop (Red Mushroom-Type, Flush Mount)

CONTROL SYSTEM

O 100 dB Alarm Horn

Ground Fault Annunciation

10A Engine Run Relay

O 120V GFCI and 240V Outlets

O 8 in (203.2 mm) Fill Extension

O 13 in (330.2 mm) Fill Extension

O 19 in (482.6 mm) Fill Extension

O 5 Gallon Spill Box Return Hose

O Fuel Level Switch and Alarm

O Fire Rated Stainless Steel Fuel Hose

Overfill Protection Valve

5 Gallon Spill Box

12' Vent System

Tank Risers

O Remote Communication - Modem

FUEL TANKS (Size On Last Page)

Remote Relay Assembly (8 or 16)

O il Temperature Indication and Alarm

- Special Fuel Tanks
- Vent Extensions

SD030 | 2.2L | 30 kW INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency

APPLICATION AND ENGINEERING DATA

ENGINE SPECIFICATIONS

	00	۸.	
17	еп	ы	211

Vlake	Perkins
EPA Emissions Compliance	Stationary Emergency
EPA Emissions Reference	See Emission Data Sheet
Cylinder #	4
Туре	In-Line
Displacement - in ³ (L)	135 (2.22)
Bore - in (mm)	3.3 (84)
Stroke - in (mm)	3.9 (100)
Compression Ratio	23.3:1
ntake Air Method	Turbocharged
Cylinder Head	Cast Iron
Piston Type	Aluminum
Crankshaft Type	Forged Steel

Engine Governing

Governor	Electronic Isochronous
Frequency Regulation (Steady State)	±0.5%

Lubrication System		
Oil Pump Type	Gear	
Oil Filter Type	Full-Flow	
Crankeage Canacity at (L)	11 2 (10 6)	

Cooling System

Cooling System Type	Closed Recovery
Water Pump Type	Pre-Lubed, Self Sealing
Fan Type	Pusher
Fan Speed - RPM	1,980
Fan Diameter - in (mm)	18 (457)

Fuel System

Fuel Type	Ultra Low Sulfur Diesel Fuel #2
Fuel Specifications	ASTM
Fuel Filtering (Microns)	5
Fuel Inject Pump	Distribution Injection Pump
Fuel Pump Type	Engine Driven Gear
Injector Type	Mechanical
Fuel Supply Line - in (mm)	0.31 (7.9) ID
Fuel Return Line - in (mm)	0.2 (4.8) ID

Engine Electrical System

System Voltage	12 VDC
Battery Charger Alternator	Standard
Battery Size	See Battery Index 0161970SBY
Battery Voltage	12 VDC
Ground Polarity	Negative

ALTERNATOR SPECIFICATIONS

Standard Model	K0035124Y21	
Poles	4	
Field Type	Revolving	
Insulation Class - Rotor	Н	
Insulation Class - Stator	Н	
Total Harmonic Distortion	<5% (3-Phase)	
Telephone Interference Factor (TIF)	< 50	

tandard Excitation	Brushless
Bearings	Single Sealed
Coupling	Direct via Flexible Disc
oad Capacity - Standby	100%
rototype Short Circuit Test	Yes
oltage Regulator Type	Digital
lumber of Sensed Phases	All
Regulation Accuracy (Steady State)	±0.25%

RAMAKER GENERAC INDUSTRIAL (608) 643-4100 www.ramaker.com PREPARED FOR:

CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 101 STATION DR WESTWOOD, MA 02090

hereby certify that this plan, specification, or report was prepare, by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Connecticut.



I 06/28/23 REVISED CDs ARK DATE DESCRIPTION DATE 02/24/2023

ASHFORD SOUTH CENTRAL FA ID # 10070912

20 SELES ROAD ASHFORD, CT 06278

GENERAC 30KW GENERATOR **SPECIFICATIONS**

SCALE: NONE

57074 F-4 I

GENERAC 30KW GENERATOR SPECIFICATIONS

COOLING

COMBUSTION AIR REQUIREMENTS

Maximum Operating Ambient Temperature

Maximum Radiator Backpressure

Maximum Operating Ambient Temperature (Before Derate)

Flow at Rated Power scfm (m3/min)

		,
Rated Engine Speed	RPM	1,800
Horsepower at Rated kW**	hp	49
Piston Speed	ft/min (m/min)	1,181 (360)
BMEP	psi (kPa)	159 (1,096)

Coolant Flow

Inlet Air

Coolant System Capacity

Heat Rejection to Coolant

SD030 | 2.2L | 30 kW

EPA Certified Stationary Emergency

MOTOR STARTING CAPABILITIES (skVA)

FUEL CONSUMPTION RATES*

OPERATING DATA

POWER RATINGS

INDUSTRIAL DIESEL GENERATOR SET

Single-Phase 120/240 VAC @1.0pf

Three-Phase 120/208 VAC @0.8pf

Three-Phase 120/240 VAC @0.8pf

Three-Phase 277/480 VAC @0.8pf

Three-Phase 346/600 VAC @0.8pf

Fuel Pump Lift- ft (m)

Total Fuel Pump Flow (Combustion + Return) - gph (Lph)

16.6 (63)

** Refer to "Emissions Data Sheet" for maximum bHP for EPA and SCAQMD permitting purposes

Deration – Operational characteristics consider maximum ambient conditions. Derate factors may apply under atypical site conditions. Please contact a Generac Power Systems Industrial Dealer for additional details. All performance ratings in accordance with ISO3046, BS5514, ISO8528, and DIN6271 standards. Standby - See Bulletin 0187500SSB

Exhaust Temp (Rated Output)

Prime - See Bulletin 0187510SSB

GENERAC INDUSTRIAL

Standby

Amps: 125

Amps: 90

Amps: 45

Amps: 36

Percent Load

25%

50%

75%

100%

gpm (Lpm)

gal (L)

BTU/hr (kW)

scfm (m3/hr

°F (°C)

in H₂O (kPa)

Standby

88 (2.5)

Max. Allowable Backpressure (Post Turbocharger) inHg (kPa)

Diesel - gph (Lph)

* Fuel supply installation must accommodate fuel consumption rates at 100% load

> Standby 14.9 (56.2)

2.5 (9.5)

128,638 (136)

2.800 (4.757)

122 (50)

0.5 (0.12)

scfm (m3/min)

°F (°C)

See Bulletin No. 0199280SSD

Standby

1.0 (3.7)

2.0 (7.5)

2.8 (10.5)

30 kW

30 kW

30 kW

30 kW

30 kW

skVA vs. Voltage Dip

277/480 VAC 30% 208/240 VAC 30%

K0035124Y21 61 K0035124Y21 46

K0040124Y21 76 K0040124Y21 58


K0050124Y21 98 K0050124Y21

SD030 | 2.2L | 30 kW

GENERAC INDUSTRIAL


INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency DIMENSIONS AND WEIGHTS*






OPEN SET (Includes Exhaust Flex) Usable Weight Time Capacity LxWxH-in(mm) - lbs (kg) - Hours - Gal (L) No Tank 76.0 (1,930) x 37.4 (950) x 44.8 (1,138) 1,641 (745) 19 76.0 (1,930) x 37.4 (950) x 57.8 (1,468) 2,121 (963) 54 (204) 76.0 (1,930) x 37.4 (950) x 69.8 (1,773) 132 (501) 2,351 (1,067) 211 (799) 76.0 (1,930) x 37.4 (950) x 81.8 (2,078) 2,560 (1,162) 107 300 (1,136) 92.9 (2,360) x 37.4 (950) x 81.8 (2,078) 2,623 (1,190)





WEATHER PROTECTED ENCLOSURE


Run Time	Usable Capacity	LxWxH-in (mm)	Weight - lbs (kg) Enclosure Only		
- Hours	- Gal (L)		Steel	Aluminum	
No Tank	-	94.8 (2,409) x 38.0 (965) x 49.5 (1,258)			
19	54 (204)	94.8 (2,409) x 38.0 (965) x 62.5 (1,588)	070	0.44	
47	132 (501)	94.8 (2,409) x 38.0 (965) x 74.5 (1,893)	372 (170)	241 (110)	
75	211 (799)	94.8 (2,409) x 38.0 (965) x 86.5 (2,198)	(170)	(110)	
107	300 (1,136)	94.8 (2,409) x 38.0 (965) x 86.5 (2,198)			





LEVEL 1 ACOUSTIC ENCLOSURE

Run Time	Usable Capacity	L x W x H - in (mm)		t - Ibs (kg) sure Only
-110013	- Gal (L)		Steel	Aluminum
No Tank	-	112.5 (2,857) x 38.0 (965) x 49.5 (1,258)		
19	54 (204)	112.5 (2,857) x 38.0 (965) x 62.5 (1,582)	-0-	000
47	132 (501)	112.5 (2,857) x 38.0 (965) x 74.5 (1,893)	505 (230)	338 (154)
75	211 (799)	112.5 (2,857) x 38.0 (965) x 86.5 (2,198)	(200)	(104)
107	300 (1,136)	112.5 (2,857) x 38.0 (965) x 86.5 (2,198)		





LEVEL 2 ACOUSTIC ENCLOSURE

Run Time	Usable Capacity	L x W x H - in (mm)	Enclos	- Ibs (kg) ure Only
- 110013	- Gal (L)		Steel	Aluminum
No Tank	-	94.8 (2,407) x 38.0 (965) x 61.1 (1,551)		
19	54 (204)	94.8 (2,407) x 38.0 (965) x 74.1 (1,881)	540	0.14
47	132 (501)	94.8 (2,407) x 38.0 (965) x 86.1 (2,186)	510 (232)	341 (155)
75	211 (799)	94.8 (2,407) x 38.0 (965) x 98.1 (2,491)	(202)	(155)
107	300 (1,136)	94.8 (2,407) x 38.0 (965) x 98.1 (2,491)		

* All measurements are approximate and for estimation purposes only. Specification characteristics may change without notice. Please contact a Generac Power Systems Industrial Dealer for detailed installation drawings.

Generac Power Systems, Inc. | P.O. Box 8 | Waukesha, WI 53189

P: (262) 544-4811 @2018 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice.

Part No. 10000024842 Rev. B 08/27/18 RAMAKER (608) 643-4100 www.ramaker.com

PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 101 STATION DR WESTWOOD, MA 02090

hereby certify that this plan, specification, or report was prepare ly me or under my direct supervision and that I am a duly Licensed



I 06/28/23 REVISED CDs ARK DATE DESCRIPTION

DATE 02/24/2023

ASHFORD SOUTH CENTRAL FA ID # 10070912

20 SELES ROAD ASHFORD, CT 06278

GENERAC 30KW GENERATOR **SPECIFICATIONS**

SCALE: NONE

57074 F-4 2

GENERAC 30KW GENERATOR SPECIFICATIONS

Standby

296.6 (8.4)

1.5 (5.1)

892 (478)

TAS200

Weight

Installed

Pre-wired alarm terminal strip

Voltage/Phase/Amps	120/240 Single-Phase, 200A 120/208 3-Phase, 200A 120/240 3-Phase, 200A
Breaker	Eaton 200 amp Utility Breaker
DIEdkei	Eaton 200 amp Generator Breaker
Maximum RMS Symmetrical Fault Current - Amps	25k AIC Rated
Protective Device Continuous Rating (Max) Amp	200
Input to Generator	350MCM - #6 AWG
Output to Site	350MCM - #6 AWG
Generator Annunciator Connector	Deutsch DTM04-12PA-L012
	Generator Run Alarm
	Generator Fail — Shutdown Alarm
Alores Terminal Deard	Generator Fail – Non Shutdown Alarm
Alarm Terminal Board	Low Fuel Alarm
	Generator Theft Alarm
	AC Utility Fail Alarm

Camlock Component		
Camlock Component	Shipped loose for multiple installation options	GENERAC
Dimensions	9" W x 9.4" D x 24.25" H	
200A Camlock Generator Connection	Single-Phase: Black L1, Red L2, White-Neutral, Green-Ground	
	3-Phase: Black L1, Red L2, Blue L3, White-Neutral, Green-Ground	
	Uses 4 CH E1016 Male Connectors	
	Mating Connector – CH E1016 Female	

The Generac TAS200 Automatic Transfer Switch

Flexibility for multiple application installations

Multiple generator support with 3 source panel

Designed with a 6 inch touch screen controller for improved user interface

Camlock functionality for mobile generator sources



Features

- STEEL CONSTRUCTION
- NEMA 3R ENCLOSURE WITH HINGED "PADLOCKING" DOORS
- STAINLESS STEEL HARDWARE
- CAMLOCK "QUICK CONNECT" CAPABILITY
- OPERATIONAL STATUS VIEW VIA **6 INCH TOUCH SCREEN**
- TEST FUNCTION FAST TEST & NORMAL TEST
- UL1008 LISTED FOR EMERGENCY SYSTEMS

Optional Features

- EXTENDED WARRANTY
- THREE-PHASE VOLTAGE CONFIGURATIONS

Codes and Standards

Generac products are designed to the following standards:



UL1008, UL508, UL50. CSA C22.2 No. 178



NEC 700, 701 and 702



NEMA 250



PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 101 STATION DR WESTWOOD, MA 02090



I 06/28/23 REVISED CDs MARK DATE DESCRIPTION

ASHFORD SOUTH CENTRAL

DATE 02/24/2023

FA ID # 10070912 20 SELES ROAD ASHFORD, CT 06278

GENERAC ATS SPECIFICATIONS

SCALE: NONE


57074 E-5

GENERAC ATS SPECIFICATIONS

TAS200

Touch Screen Interface





INDICATORS AND BUTTONS

- System Ready indicator
- Standby Operating indicator
- Utility Available indicator
- GEN/UTIL Switch Position indicator
- TVSS status

- Normal Test button
- Fast Test button
- Return to Normal button
- Reset button
- Exercising indicator

DETAILS SCREEN

System Settings:

- System Voltage/Phases:
- 120/240V single phase (standard)
- 120/208V three phase (optional)
- 120/240V three phase (optional)
- Utility Fail Monitor:
- Under Voltage: 75-95% of nominal voltage
- Over Voltage: 105%-125% of nominal voltage
- Pickup (hysteresis): fixed at 5 volts
- Delay time: 0-60s
- Utility Interrupt Delay: 0-60s
- Return to Utility Timer: 1-30 minutes
- Transfer:
- In-phase, or
- Time-Delay-Neutral at 0.0-10.0s in 1 second increments

Engine Settings:

- Engine Warm-up timer: 0-20 minutes
- Generator Load Accept:
- Time-Delay-Neutral at 0.0-10.0s in 1 second increments
- Voltage: 85-95% of nominal
- Frequency: 85-95% of nominal
- Engine Minimum Run Timer: 5-30 minutes
- Engine Cooldown Timer: 0-20 minutes

Exercise Settings:

- Time of day
- · Day of week
- Exercise:
- Exercise with/without load
- Exercise once every 1, 2, or 4 weeks.
- Exercise time-of-day
- Exercise day of week
- Exercise duration: 15-30 minutes

Screen Settings:

- Brightness & Contrast button
- Screen Calibration button Startup/Clean screen

Diagnostics:

- Digital I/O bits status
- Voltage A/D readings

Mimic Diagram:

- · System Ready
- · Transfer switch position
- Utility available
- Standby available
- Maintenance/Auto switch position
- Generator source TS position TVSS status

Generac Power Systems, Inc. • S45 W29290 HWY. 59, Waukesha, WI 53189 • generac.com @2013 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice. Bulletin 0195670SBY-B / Printed in U.S.A. 03/13/13



PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 101 STATION DR WESTWOOD, MA 02090

hereby certify that this plan, specification, or report was prepare, by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Connecticut.



I 06/28/23 REVISED CDs MARK DATE DESCRIPTION

DATE 02/24/2023

ASHFORD SOUTH

CENTRAL FA ID # 10070912

PROJECT INFORMATION: 20 SELES ROAD ASHFORD, CT 06278

GENERAC ATS SPECIFICATIONS

SCALE: NONE

57074 PROJECT NUMBER SHEET E-5.1

