

January 23, 2014

David Martin and Members of the Siting Council Connecticut Siting Council Ten Franklin Square New Britain, CT 06051

> RE: Notice of Exempt Modification 60 Commerce Street East Haven, CT 06512 N 41° 15' 04.42" W -72° 523' 55.10" Sprint Site #: NV2.5 CT70XC121

Dear Mr. Martin and Members of the Siting Council:

On behalf of Sprint, SBA Communications is submitting an exempt modification application to the Connecticut Siting council for modification of existing equipment at a tower facility located at 60 Commerce Street , East Haven, CT.

The 60 Commerce Street facility consists of a 70′ Monopole owned and operated by SBA Properties, LLC. In order to accommodate technological changes and enhance system performance in the State of Connecticut, Sprint plans to modify the equipment configurations at many of its existing cell sites. Please accept this letter and attachments as notification, pursuant to R.C.S.A. Section 16-50j-73, of construction which constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2). In compliance with R.C.S.A. Section 16-50j-73, a copy of this letter and attachments is being sent to the chief elected official of the municipality in which the affected cell site is located.

As part of Sprint's modernization project, Sprint desires to upgrade their equipment to meet the new standards of 4G technology. The new equipment will allow customers to download files and browse the internet at a high rate of speed while also allowing their phones to be compatible with the latest 4G technology.

Attached is a summary of the planned modifications, including power density calculations reflecting the change in Sprint's operations at the site along with the required fee of \$625.

The changes to the facility do not constitute modifications as defined in Connecticut General Statutes ("C.G.S.") Section 16-50i(d) because the general physical characteristics of the facility will not be



significantly changed or altered. Rather, the planned changes to the facility fall squarely within those activities explicitly provided for in R.C.S.A. Section 16-50j-72(b)(2).

- 1. The overall height of the structure will be unaffected.
- 2. The proposed changes will not extend the site boundaries. There will be no effect on the site compound other than the new equipment cabinets.
- 3. The proposed changes will not increase the noise level at the existing facility by six decibels or more.
- 4. The changes in radio frequency power density will not increase the calculated "worst case" power density for the combined operations at the site to a level at or above the applicable standard for uncontrolled environments as calculated for a mixed frequency site.

For the foregoing reasons, SBA Communications on behalf of Sprint, respectfully submits that he proposed changes at the referenced site constitute exempt modifications under R.C.S.A. Section 16-50j-72(b)(2).

Please feel free to call me at (508) 251-0720 x 302 with any questions you may have concerning this matter.

Thank you,

Kri Pelletier
SBA Communications Corporation
33 Boston Post Road West Suite 320
Marlborough, MA 01752
508-251-0720 x 302 + T
508-251-1755 + F
203-446-7700 + C
kpelletier@sbasite.com



Sprint Equipment Modification

60 Commerce Street, East Haven, CT 06512 Site number CT70XC121

Tower Owner: SBA Properties, LLC

Equipment Configuration: Monopole

Current and/or approved:

• (3) RFS APXVSPP18-C-A20

- (3) ALU 1900MHz RRH (25mhz)
- (3) ALU 800 MHz RRHs
- (3) ALU 800 MHz External Notch Filters
- (6) RFS 1900 ACU-A20-N RETs
- (3) RFS 800 ACU-A20-N RETs
- (3) 1-1/4" feed lines

Planned Modifications:

- (3) RFS APXVTM14-C-I20
- (3) RRH TD-RRH8x20-25 RRHs
- (3) RFS APXVSPP18-C-A20
- (3) ALU 1900MHz RRH (25mhz)
- (3) ALU 800 MHz RRHs
- (3) ALU 800 MHz External Notch Filters
- (6) RFS 1900 ACU-A20-N RETs
- (3) RFS 800 ACU-A20-N RETs
- (3) 1-1/4" feed lines
- 0.7" Fiber Cable

Structural Information:

The attached structural analysis demonstrates that the tower and foundation will have adequate structural capacity to accommodate the proposed modifications.

Power Density:

The anticipated Maximum Composite contributions from the Sprint facility are 0.009% of the allowable FCC established general public limit. The anticipated composite MPE value for this site assuming all carriers present is 39.909% of the allowable FCC established general public limit sampled at the ground level.

Site Composite MPE %							
Carrier	MPE %						
Sprint	0.009%						
Nextel	1.530%						
Verizon Wireless	21.600%						
Clearwire	16.770%						
Total Site MPE %	39.909%						



January 23, 2014

Mayor Joseph Maturo, Jr. City of East Haven East Haven Town Hall 250 Main Street East Haven, CT 06512

RE: Telecommunications Facility @ 60 Commerce Street, East Haven, CT 06512

Dear Mayor Maturo,

In order to accommodate technological changes and enhance system performance in the State of Connecticut, Sprint will be changing its equipment configuration at certain cell sites.

As required by Regulations of Connecticut State Agencies (R.C.S.A.) Section 16-50j-73, the Connecticut Siting Council has been notified of the changes and will review Sprint's proposal. Please accept this letter as notification under Section 16-50j-73 of construction which constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2).

The accompanying letter to the Siting Council fully describes Sprint's proposal for the referenced cell site. However, if you have any questions or require any further information on our plans or the Siting Council's procedures, please call me at (508) 251-0720 x 302.

Thank you,

Kri Pelletier
SBA Communications Company
33 Boston Post Road West Suite 320
Marlborough, MA 01752
508-251-0720 x 302 + T
508-251-1755 + F
203-446-7700 + C
kpelletier@sbasite.com



FDH Engineering, Inc., 6521 Meridien Drive Raleigh, NC 27616, Ph. 919.755.1012

Structural Analysis for SBA Network Services, Inc.

70' Monopole Tower

SBA Site Name: New Haven Tweed SBA Site ID: CT46147-A-01 Sprint Nextel Site: CT70XC121

FDH Project Number 13TFWE1400

Analysis Results

Tower Components	82.7%	Sufficient
Foundation	76.4%	Sufficient

Prepared By:

Joshua A Shaw, El Project Engineer

> FDH Engineering, Inc. 6521 Meridien Drive Raleigh, NC 27616 (919) 755-1012 info@fdh-inc.com

Reviewed By:

Bradley Newman, PE Senior Project Engineer CT License No. 29630



December 9, 2013

Prepared pursuant to TIA/EIA-222-F Structural Standards for Steel Antenna Towers and Antenna Supporting Structures and the 2005 Connecticut Building Code (CBC)

Document No. ENG-RPT-501S Revision Date: 06/17/11

TABLE OF CONTENTS EXECUTIVE SUMMARY 3 Conclusions 3 Recommendations 3 APPURTENANCE LISTING 4 RESULTS 5 GENERAL COMMENTS 6

LIMITATIONS 6
APPENDIX 7

EXECUTIVE SUMMARY

At the request of SBA Network Services, Inc., FDH Engineering, Inc. performed a structural analysis of the monopole located in East Haven, CT to determine whether the tower is structurally adequate to support both the existing and proposed loads pursuant to the *Structural Standards for Steel Antenna Towers and Antenna Supporting Structures, TIA/EIA-222-F* and the 2005 Connecticut Building Code (CBC). Information pertaining to the existing/proposed antenna loading, current tower geometry, foundation dimensions, soil parameters, and member sizes was obtained from:

Valmont Structures (Eng. File No. A-121647-F-1008179) original design drawings dated October 11, 2005
JGI Eastern, Inc. (Project No. 05557G) Geotechnical Evaluation dated September 27, 2005
Tower Engineering Professionals (Project No. 127423) Structural Analysis Report - Overlap Loading dated
September 25, 2012
SBA Network Services, Inc.

The basic design wind speed per the TIA/EIA-222-F standards and the 2005 CBC is 85 mph without ice and 38 mph with 3/4" radial ice. Ice is considered to increase in thickness with height.

Conclusions

With the existing and proposed antennas from Sprint/Nextel in place at 68 ft and 65 ft, the tower meets the requirements of the *TIA/EIA-222-F* standards and the *2005 CBC* provided the **Recommendations** listed below are satisfied. Furthermore, provided the foundation was designed and constructed to support the original design reactions (see Valmont Structures Eng. File No. A-121647-F-1008179), the foundation should have the necessary capacity to support both the proposed and existing loading. For a more detailed description of the analysis of the tower, see the **Results** section of this report.

Our structural analysis has been performed assuming all information provided to FDH Engineering, Inc. is accurate (i.e., the steel data, tower layout, existing antenna loading, and proposed antenna loading) and that the tower has been properly erected and maintained per the original design drawings.

Recommendations

To ensure the requirements of the *TIA/EIA-222-F* standards and the *2005 CBC* are met with the existing and proposed loading in place, we have the following recommendations:

- 1. The proposed fiber cable should be installed inside the pole's shaft but may be installed outside the pole's shaft adjacent to the existing coax if necessary.
- 2. RRU/RRH Stipulation: The equipment should be installed directly behind the proposed panel antennas.

APPURTENANCE LISTING

The proposed and existing antennas with their corresponding cables/coax lines are shown in **Table 1**. If the actual layout determined in the field deviates from the layout, FDH Engineering, Inc. should be contacted to perform a revised analysis.

Table 1 - Appurtenance Loading

Existing Loading:

Antenna Elevation (ft)	Description	Feedlines	Carrier	Mount Elevation (ft)	Mount Type
65	(3) RFS APXVSPP18-C-A20 (3) ALU 1900MHz RRH (25mhz) (3) ALU 800 MHz RRHs (3) ALU 800 MHz External Notch Filters (6) RFS 1900 ACU-A20-N RETs (3) RFS 800 ACU-A20-N RETs	(3) 1-1/4"	Sprint/Nextel	65	(3) T-Arms
55	(3) Antel BXA-70063-6CF (3) Antel BXA-171063-8BF (3) Antel BXA-185063/8CF (3) Antel BXA-80063-6BF (3) ALU RRH2X40-AWS RRUs (6) RFS FD9R6004/2C-3L Diplexers (1) RFS DB-T1-6Z-8AB-0Z Distribution Box	(12) 1-5/8" (1) 1-5/8" Fiber Cable	Verizon	55	(3) T-Arms

^{1.} See **Figure 1** for feedline layout.

Proposed Loading:

Antenna Elevation (ft)	Description	Feedlines	<u>Carrier</u>	Mount Elevation (ft)	Mount Type
68	(3) RFS APXVTM14-C-I20 (3) RRH TD-RRH8x20-25 RRHs				
65	(3) RFS APXVSPP18-C-A20 (3) ALU 1900MHz RRH (25mhz) (3) ALU 800 MHz RRHs (3) ALU 800 MHz External Notch Filters (6) RFS 1900 ACU-A20-N RETs (3) RFS 800 ACU-A20-N RETs	(3) 1-1/4" (1) 0.7" Fiber Cable	Sprint/Nextel	65	(3) T-Arms

RESULTS

The following yield strength of steel for individual members was used for analysis:

Table 2 - Material Strength

Member Type	Yield Strength
Tower Shaft Sections	65 ksi
Base Plate	60 ksi
Anchor Bolts	75 ksi

Table 3 displays the summary of the ratio (as a percentage) of force in the member to their capacities. Values greater than 100% indicate locations where the maximum force in the member exceeds its capacity. **Table 4** displays the maximum foundation reactions.

If the assumptions outlined in this report differ from actual field conditions, FDH Engineering, Inc. should be contacted to perform a revised analysis. Furthermore, as no information pertaining to the allowable twist and sway requirements for the existing or proposed appurtenances was provided, deflection and rotation were not taken into consideration when performing this analysis.

See the **Appendix** for detailed modeling information

Table 3 - Summary of Working Percentage of Structural Components

Section No.	Elevation ft	Component Type	Size	% Capacity*	Pass Fail
L1	70 - 30.917	Pole	TP25.27x16.28x0.188	57.2	Pass
L2	30.917 - 0	Pole	TP32x24.0123x0.219	82.7	Pass
=	0	Anchor Bolts	(8) 2.25"ø on 39.13" BC	43.3	Pass
-	0	Base Plate	45.13"ø PL x 2" thk.	36.8	Pass

^{*}Capacities include 1/3 allowable stress increase for wind per TIA/EIA-222-F standards.

Table 4 - Maximum Base Reactions

Base Reactions	Current Analysis (TIA/EIA-222-F)	Original Design (TIA/EIA-222-F)			
Axial	8 k	10 k			
Shear	12 k	13 k			
Moment	557 k-ft	729 k-ft			

GENERAL COMMENTS

This engineering analysis is based upon the theoretical capacity of the structure. It is not a condition assessment of the tower and its foundation. It is the responsibility of SBA Network Services, Inc. to verify that the tower modeled and analyzed is the correct structure (with accurate antenna loading information) modeled. If there are substantial modifications to be made or the assumptions made in this analysis are not accurate, FDH Engineering, Inc. should be notified immediately to perform a revised analysis.

LIMITATIONS

All opinions and conclusions are considered accurate to a reasonable degree of engineering certainty based upon the evidence available at the time of this report. All opinions and conclusions are subject to revision based upon receipt of new or additional/updated information. All services are provided exercising a level of care and diligence equivalent to the standard and care of our profession. No other warranty or guarantee, expressed or implied, is offered. Our services are confidential in nature and we will not release this report to any other party without the client's consent. The use of this engineering work is limited to the express purpose for which it was commissioned and it may not be reused, copied, or distributed for any other purpose without the written consent of FDH Engineering, Inc.

APPENDIX


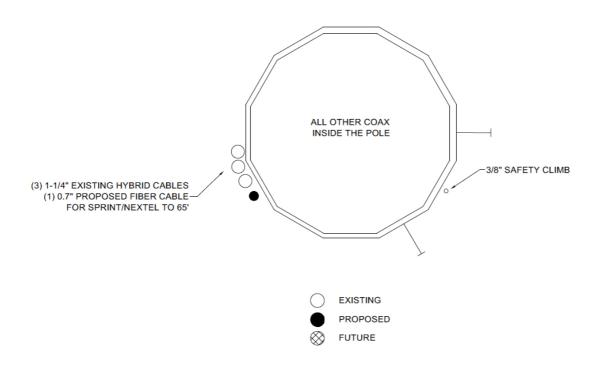


Figure 1- Assumed Coax Layout At Base

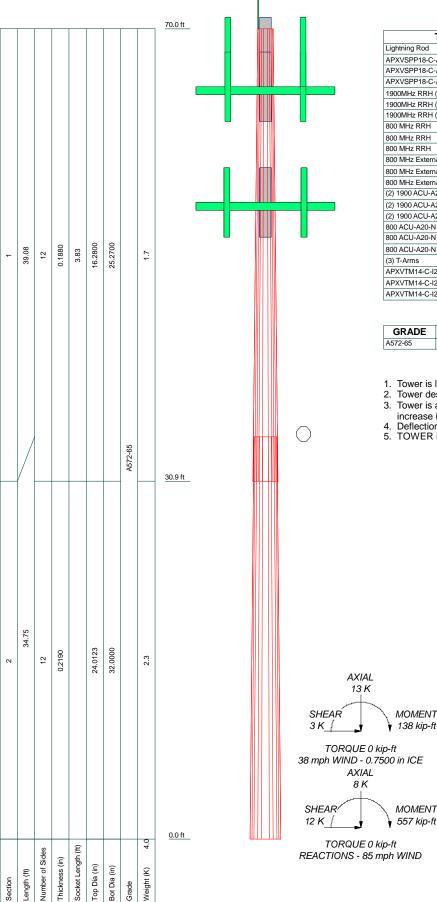

DESIGNED APPURTENANCE LOADING


TYPE	ELEVATION	TYPE	ELEVATION
Lightning Rod	70	TD-RRH8x20-25	65
APXVSPP18-C-A20 w/Mount Pipe	65	TD-RRH8x20-25	65
APXVSPP18-C-A20 w/Mount Pipe	65	TD-RRH8x20-25	65
APXVSPP18-C-A20 w/Mount Pipe	65	BXA-70063-6CF w/ Mount Pipe	55
1900MHz RRH (25mhz)	65	BXA-70063-6CF w/ Mount Pipe	55
1900MHz RRH (25mhz)	65	BXA-70063-6CF w/ Mount Pipe	55
1900MHz RRH (25mhz)	65	BXA-171063-8BF w/ Mount Pipe	55
800 MHz RRH	65	BXA-171063-8BF w/ Mount Pipe	55
800 MHz RRH	65	BXA-171063-8BF w/ Mount Pipe	55
800 MHz RRH	65	BXA-185063/8CF w/ Mount Pipe	55
800 MHz External Notch Filter	65	BXA-185063/8CF w/ Mount Pipe	55
800 MHz External Notch Filter	65	BXA-185063/8CF w/ Mount Pipe	55
800 MHz External Notch Filter	65	BXA-80063-6BF w/ Mount Pipe	55
(2) 1900 ACU-A20-N RET	65	BXA-80063-6BF w/ Mount Pipe	55
(2) 1900 ACU-A20-N RET	65	BXA-80063-6BF w/ Mount Pipe	55
(2) 1900 ACU-A20-N RET	65	RRH2X40-AWS	55
800 ACU-A20-N RET	65	RRH2X40-AWS	55
800 ACU-A20-N RET	65	RRH2X40-AWS	55
800 ACU-A20-N RET	65	(2) FD9R6004 Diplexer	55
(3) T-Arms	65	(2) FD9R6004 Diplexer	55
APXVTM14-C-I20 w/ Mount Pipe	65	(2) FD9R6004 Diplexer	55
APXVTM14-C-I20 w/ Mount Pipe	65	DB-T1-6Z-8AB-0Z	55
APXVTM14-C-I20 w/ Mount Pipe	65	(3) T-Arms	55

MATERIAL STRENGTH

GRADE	Fy	Fu	GRADE	Fy	Fu
A572-65	65 ksi	80 ksi			

TOWER DESIGN NOTES

- 1. Tower is located in New Haven County, Connecticut.
- Tower is located if New Haven County, Confrection.
 Tower designed for a 85 mph basic wind in accordance with the TIA/EIA-222-F Standard.
 Tower is also designed for a 38 mph basic wind with 0.75 in ice. Ice is considered to increase in thickness with height.
 Deflections are based upon a 60 mph wind.
 TOWER RATING: 82.7%





-		
^{Job:} New Haven Tw	eed, CT46147-A-01	
Project: 13TFWE1400		
Client: SBA	Drawn by: Joshua A Shaw	App'd:
Code: TIA/EIA-222-F	Date: 12/05/13	Scale: NT
Path:		Dwg No. E-



RADIO FREQUENCY FCC REGULATORY COMPLIANCE MAXIMUM PERMISSIBLE EXPOSURE (MPE) ASSESSMENT

Sprint Existing Facility

Site ID: CT70XC121

Nextel Colo 60 Commerce Street East Haven, CT 06512

January 14, 2014

21 B Street Burlington, MA 01803 Tel: (781) 273.2500 Fax: (781) 273.3311



January 14, 2014

Sprint Attn: RF Engineering Manager 1 International Boulevard, Suite 800 Mahwah, NJ 07495

Re: Radio Frequency Maximum Permissible Exposure (MPE) Assessment for Site: CT70XC121– Nextel Colo

Site Total: 39.909% - MPE% in full compliance

EBI Consulting was directed to analyze the proposed upgrades to the existing Sprint facility located at 60 Commerce Street, East Haven, CT, for the purpose of determining whether the radio frequency (RF) exposure levels from the proposed Sprint equipment upgrades on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01 and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter (μ W/cm2). The number of μ W/cm2 calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits, therefore it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) - (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

General population/uncontrolled exposure limits apply to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general public would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Public exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter (μ W/cm²). The general population exposure limit for the cellular band is approximately 567 μ W/cm², and the general population exposure limit for the 1900 MHz and 2500 MHz bands band is 1000 μ W/cm². Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.



Occupational/controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

CALCULATIONS

Calculations were done for the proposed upgrades to the existing Sprint Wireless antenna facility located at 60 Commerce Street, East Haven, CT, using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. For this report the sample point is the top of a 6 foot person standing at the base of the tower. The actual gain value of the antenna vertical broadcast pattern, per the antenna manufactures supplied specifications, was used in this direction. This value will be much lower than the maximum gain value for these antennas in this direction based upon their directivity.

For all calculations, all emissions were calculated using the following assumptions:

- 1) 3 channels in the 1900 MHz Band were considered for each sector of the proposed installation.
- 2) 1 channel in the 800 MHz Band was considered for each sector of the proposed installation
- 3) 1 channel in the 2500 MHz Band was considered for each sector of the proposed installation.
- 4) All radios at the proposed installation were considered to be running at full power and were uncombined in their RF transmissions paths per carrier prescribed configuration. Per FCC OET Bulletin No. 65 Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. This is rarely the case, and if so, is never continuous.
- 5) For the following calculations the sample point was the top of a six foot person standing at the base of the tower. The actual gain value of the antenna vertical broadcast pattern, per the antenna manufactures supplied specifications, was used in this direction. This value will be much lower than the maximum gain value for these antennas in this direction based upon their directivity.



- 6) The antennas used in this modeling are the RFS APXVSPP18-C-A20 and the RFS APXVTMM-C-120. This is based on feedback from the carrier with regards to anticipated antenna selection. The RFS APXVSPP18-C-A20 has a 15.9 dBd gain value at its main lobe at 1900 MHz and 13.4 dBd at its main lobe for 850 MHz. The RFS APXVTMM-C-120 has a 15.9 dBd gain value at its main lobe at 2500 MHz. All calculations were performed assuming the main lobe of the antenna was focused at the base of the tower to present a worst case scenario.
- 7) The antenna mounting height centerlines for the existing proposed antennas are 1 antenna per sector at **65 feet** above ground level (AGL) **and** 1 antenna per sector at **68 feet** above ground level (AGL).
- 8) Emissions values for additional carriers were taken from the Connecticut Siting Council active database. Values in this database are provided by the individual carriers themselves.

All calculation were done with respect to uncontrolled / general public threshold limits

	Site ID	CT70	XC121 - Nextel	Colo	1												
	Site Addresss		Street, East Ha														
	Site Type		Monopole	,													
	7.				4												
							Secto	or 1									
						D			A C-:								
						Power Out Per			Antenna Gain in direction							Power	Power
Antenna						Channel	Number of	Composite	of sample	Antenna	analysis		Cable Loss	Additional		Density	Density
	Antenna Make	Antenna Model	Radio Type	Frequency Band	Technology	(Watts)	Channels	Power	•	Height (ft)	height	Cable Size	(dB)	Loss	ERP	Value	Percentage
1a	RFS	APXVSPP18-C-A20	RRH	1900 MHz	CDMA / LTE	20	3	60	-26,21	65	59	1/2 "	0.5	0	0.1279827	0.013218	0.00132%
1a	RFS	APXVSPP18-C-A20	RRH	850 MHz	CDMA / LTE	20	1	20	-28.71	65	59	1/2 "	0.5	0	0.02399	0.002478	0.00044%
1B	RFS	APXVTMM14-C-120	RRH	2500 MHz	CDMA / LTE	40	1	40	-26.21	68	62	1/2 "	0.5	0	0.0853218	0.00798	0.00141%
												Sector tot	al Power De	ensity Value:	0.0032%		
							Secto	ur 2									
							3600	11 2									
						Power			Antenna Gain								
						Out Per			in direction							Power	Power
Antenna						Channel	Number of	Composite	of sample	Antenna	analysis		Cable Loss	Additional		Density	Density
	Antenna Make	Antenna Model	Radio Type	Frequency Band	Technology	(Watts)	Channels	Power	point (dBd)			Cable Size		Loss	ERP	Value	Percentage
2a	RFS	APXVSPP18-C-A20	RRH	1900 MHz	CDMA / LTE	20	3	60	-26.21	65	59	1/2 "	0.5	0	0.1279827	0.013218	0.00132%
2a	RFS	APXVSPP18-C-A20	RRH	850 MHz	CDMA / LTE	20	1	20	-28.71	65	59	1/2 "	0.5	0	0.02399	0.002478	0.00044%
2B	RFS	APXVTMM14-C-120	RRH	2500 MHz	CDMA / LTE	40	1	40	-26.21	68	62	1/2 "	0.5	0	0.0853218	0.00798	0.00141%
												Sector tot	al Power De	ensity Value:	0.003%		
							Secto	or 3									
						Power			Antenna Gain								_
						Out Per	Ni	C	in direction		b t		Calala I a	A deltate		Power	Power
Antenna	Antonno Mako	Antonno Model	Dadia Tuna	Fraguenay Band	Tochnology	Channel (Motts)	Channels	Composite	of sample	Antenna	analysis		Cable Loss		FDD	Density Value	Density
Number 3a	Antenna Make RFS	Antenna Model APXVSPP18-C-A20	Radio Type RRH	Frequency Band 1900 MHz	Technology CDMA / LTE	(Watts)	Channels 3	Power 60	point (dBd) -26,21	Height (ft)	height 59	Cable Size	(dB) 0.5	Loss	0.1279827	0.013218	Percentage 0.00132%
3a 3a	RFS	APXVSPP18-C-A20 APXVSPP18-C-A20	RRH	850 MHz	CDMA / LTE	20	1	20	-26.21	65	59	1/2 "	0.5	0	0.12/982/	0.002478	0.00132%
3B	RFS	APXVTMM14-C-120	RRH	2500 MHz	CDMA / LTE	40	1	40	-26.21	68	62	1/2 "	0.5	0	0.02399	0.002478	0.00044%
30	1413	AI AV 114114114-C-120	MIII	2500 1411 12	CDIVIA / LIL	70		40	20.21		02				0.0033218	0.00736	0.00141/6
	Sector total Power Density Value: 0.003%																

Site Composite MPE %	
Carrier	MPE %
Sprint	0.009%
Nextel	1.530%
Verizon Wireless	21.600%
Clearwire	16.770%
Total Site MPE %	39.909%



Summary

All calculations performed for this analysis yielded results that were well within the allowable limits for general public Maximum Permissible Exposure (MPE) to radio frequency energy.

The anticipated Maximum Composite contributions from the Sprint facility are **0.009**% (**0.003**% **from each sector**) of the allowable FCC established general public limit considering all three sectors simultaneously sampled at the ground level.

The anticipated composite MPE value for this site assuming all carriers present is **39.909**% of the allowable FCC established general public limit sampled at 6 feet above ground level. This total composite site value is based upon MPE values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.


Scott Heffernan


RF Engineering Director

EBI Consulting

21 B Street

Burlington, MA 01803

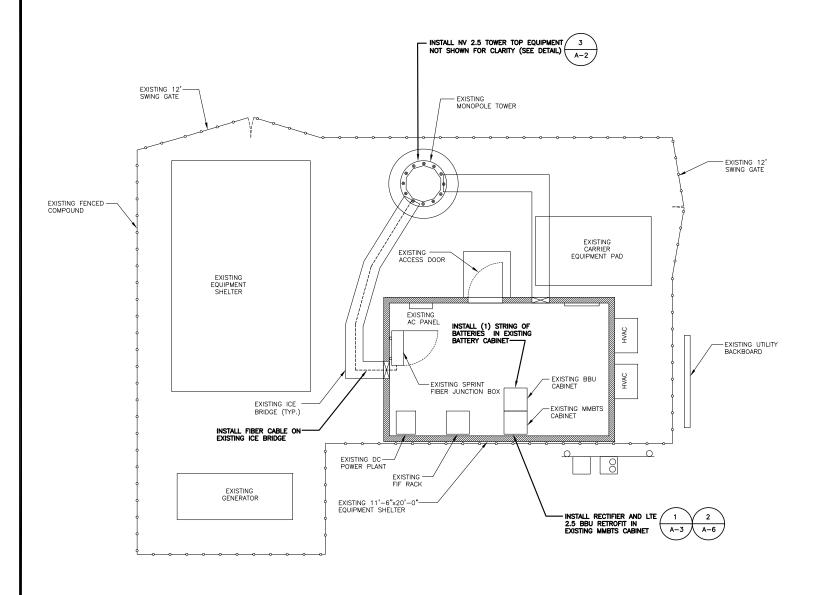

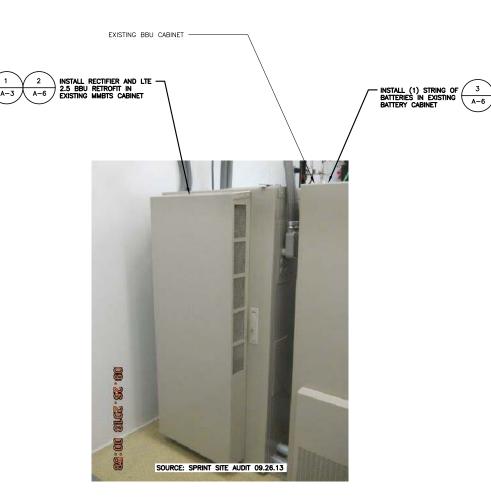

RAN EQUIPMENT PHOTO DETAIL

SCALE: N.T.S.

A-1



1 INTERNATIONAL BLVD, SUITE 800 MAHWAH, NJ 07495 TEL: (800) 357-7641



SBA COMMUNICATIONS CORP. 33 BOSTON POST ROAD WEST, SUITE 320 MARLBOROUGH, MA 01752 TEL: (508) 251-180

PLANS PREPARED BY:

ADVANCED

ENGINEERING GROUP, P.C.
Civil Engineering - Site Development
Surveying - Telecommunications
500 NORTH BROADWAY
ENGINEERING TRANSCHORE, 10 02914
FAX: (401) 533-6354



CHECKED BY: MRC

APPROVED BY: MRC

SUBMITTALS

REV. DATE DESCRIPTION

0 01/05/14 ISSUED FOR BP

SITE NUMBER: CT70XC121 SITE NAME: NEXTEL COLO


60 COMMERCE STREET EAST HAVEN, CT 06512

SHEET TI

COMPOUND PLAN


SHEET NUME

A-1







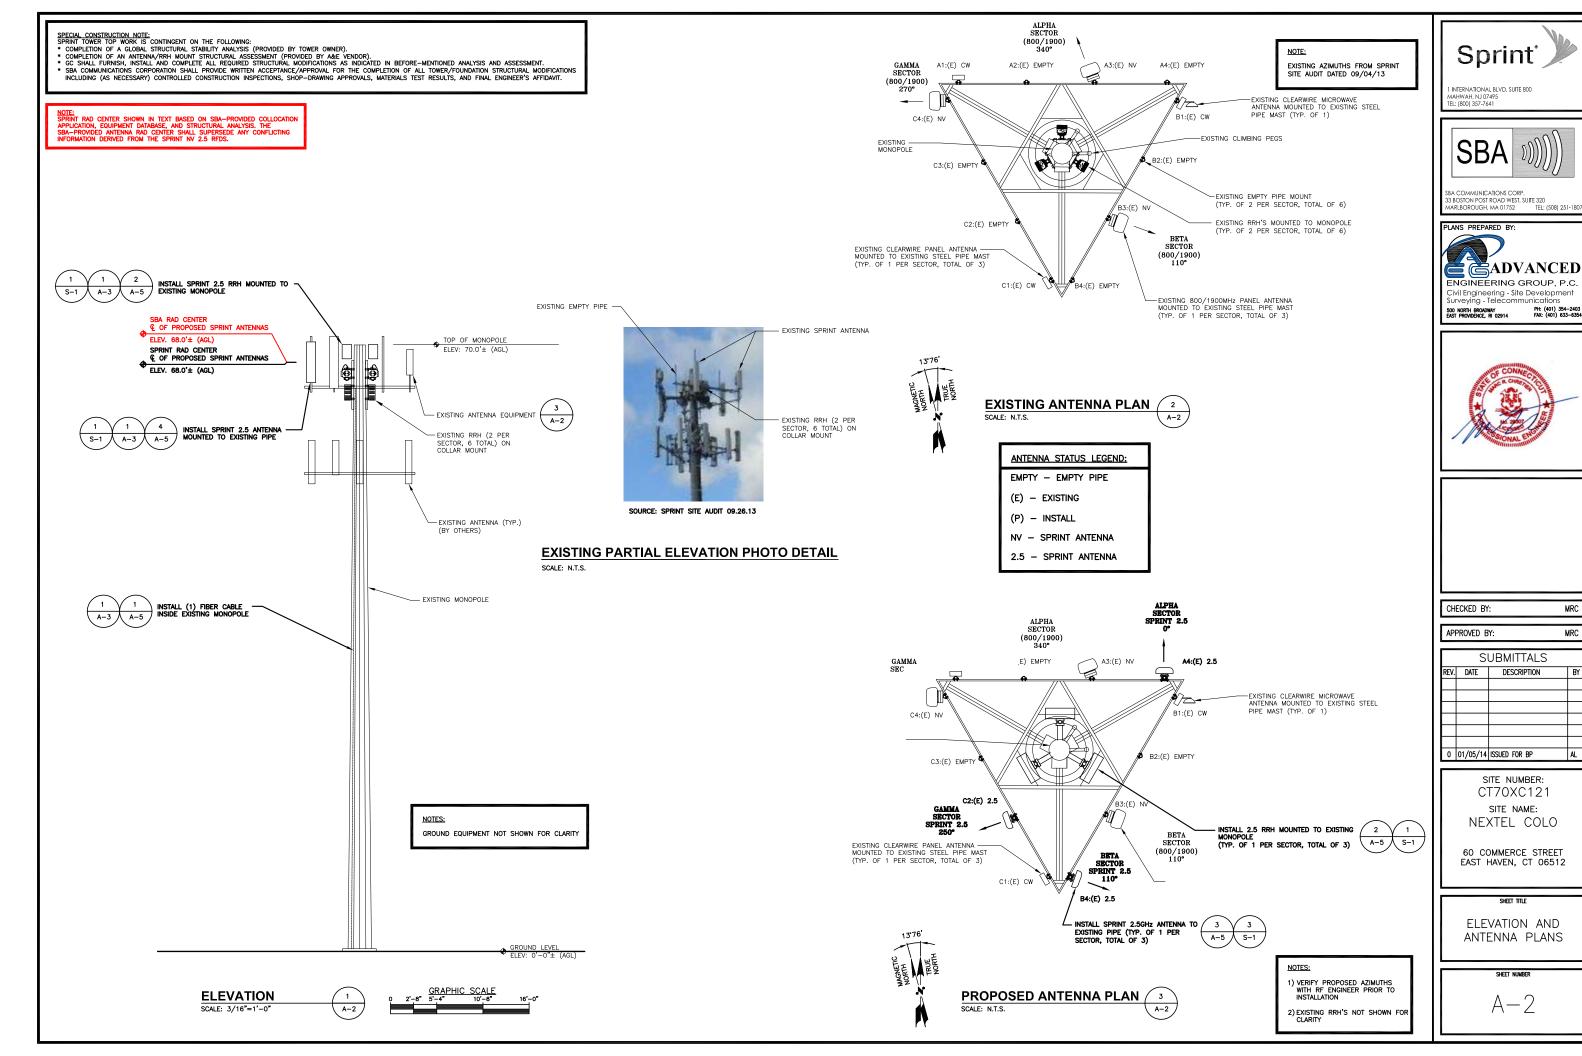

MRC

MRC