

STATE OF CONNECTICUT

CONNECTICUT SITING COUNCIL

Ten Franklin Square, New Britain, CT 06051
Phone: (860) 827-2935 Fax: (860) 827-2950
E-Mail: siting.council@ct.gov
www.ct.gov/csc

June 1, 2012

Jennifer Young Gaudet HPC Wirless Services 46 Mill Plain Road, Floor 2 Danbury, CT 06811

RE: **EM-CING-049-120517** – AT&T Mobility notice of intent to modify an existing telecommunications facility located at Bright Meadow Boulevard, Enfield, Connecticut.

Dear Ms. Groppi:

The Connecticut Siting Council (Council) hereby acknowledges your notice to modify this existing telecommunications facility, pursuant to Section 16-50j-73 of the Regulations of Connecticut State Agencies with the following conditions:

- Any deviation from the proposed modification as specified in this notice and supporting materials with Council shall render this acknowledgement invalid;
- Any material changes to this modification as proposed shall require the filing of a new notice with the Council;
- Not less than 45 days after completion of construction, the Council shall be notified in writing that construction has been completed;
- The validity of this action shall expire one year from the date of this letter; and
- The applicant may file a request for an extension of time beyond the one year deadline provided that such request is submitted to the Council not less than 60 days prior to the expiration;

The proposed modifications including the placement of all necessary equipment and shelters within the tower compound are to be implemented as specified here and in your notice dated May 16, 2012. The modifications are in compliance with the exception criteria in Section 16-50j-72 (b) of the Regulations of Connecticut State Agencies as changes to an existing facility site that would not increase tower height, extend the boundaries of the tower site, increase noise levels at the tower site boundary by six decibels, and increase the total radio frequencies electromagnetic radiation power density measured at the tower site boundary to or above the standard adopted by the State Department of Environmental Protection pursuant to General Statutes § 22a-162. This facility has also been carefully modeled to ensure that radio frequency emissions are conservatively below State and federal standards applicable to the frequencies now used on this tower.

This decision is under the exclusive jurisdiction of the Council. Please be advised that the validity of this action shall expire one year from the date of this letter. Any additional change to



this facility will require explicit notice to this agency pursuant to Regulations of Connecticut State Agencies Section 16-50j-73. Such notice shall include all relevant information regarding the proposed change with cumulative worst-case modeling of radio frequency exposure at the closest point of uncontrolled access to the tower base, consistent with Federal Communications Commission, Office of Engineering and Technology, Bulletin 65. Thank you for your attention and cooperation.

Very truly yours,

Linda Roberts

Executive Director

LR/CDM/cm

c: The Honorable Scott Kaupin, Mayor, Town of Enfield
Matthew W. Coppler, Town Manager, Town of Enfield
Jose Giner, Director of Planning and Community Development, Town of Enfield



STATE OF CONNECTICUT

CONNECTICUT SITING COUNCIL

Ten Franklin Square, New Britain, CT 06051 Phone: (860) 827-2935 Fax: (860) 827-2950 E-Mail: siting.council@ct.gov www.ct.gov/csc

May 18, 2012

The Honorable Scott Kaupin Mayor Town of Enfield 820 Enfield Street Enfield, CT 06082

RE: **EM-CING-049-120517** – New Cingular Wireless PCS, LLC (AT&T) notice of intent to modify an existing telecommunications facility located at Bright Meadow Road, Enfield, Connecticut.

Dear Mayor Kaupin:

The Connecticut Siting Council (Council) received this request to modify an existing telecommunications facility, pursuant to Regulations of Connecticut State Agencies Section 16-50j-72.

If you have any questions or comments regarding this proposal, please call me or inform the Council by June 1, 2012.

Thank you for your cooperation and consideration.

Very truly yours,

Linda Roberts

Executive Director

LR/cm

Enclosure: Notice of Intent

c: Matthew W. Coppler, Town Manager, Town of Enfield
Jose Giner, Director of Planning and Community Development, Town of Enfield





HPC Wireless Services

46 Mill Plain Rd. Floor 2 Danbury, CT, 06811 P.: 203.797.1112

ORIGINAL

May 16, 2012

VIA OVERNIGHT COURIER

Connecticut Siting Council 10 Franklin Square New Britain, Connecticut 06051 Attn: Ms. Linda Roberts, Executive Director

Re:

New Cingular Wireless PCS, LLC – exempt modification

Bright Meadow Boulevard, Enfield, Connecticut

Dear Ms. Roberts:

This letter and attachments are submitted on behalf of New Cingular Wireless PCS, LLC ("AT&T"). AT&T is making modifications to certain existing sites in its Connecticut system in order to implement LTE technology. Please accept this letter and attachments as notification, pursuant to R.C.S.A. Section 16-50j-73, of construction that constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2). In compliance with R.C.S.A. Section 16-50j-73, a copy of this letter and attachments is being sent to the Mayor of the Town of Enfield.

AT&T plans to modify the existing wireless communications facility owned by Crown Castle and located off of Bright Meadow Boulevard in the Town of Enfield (coordinates 42°-01'-14.8" N, 72°-35'-06.7" W). Attached are a compound plan and elevation depicting the planned changes, and documentation of the structural sufficiency of the structure to accommodate the revised antenna configuration. Also included is a power density report reflecting the modification to AT&T's operations at the site.

The changes to the facility do not constitute a modification as defined in Connecticut General Statutes ("C.G.S.") Section 16-50i(d) because the general physical characteristics of the facility will not be significantly changed. Rather, the planned changes to the facility fall squarely within those activities explicitly provided for in R.C.S.A. Section 16-50j-72(b)(2).

1. AT&T will add three (3) LTE antennas to and relocate three (3) existing antennas on the existing platform at a center line of approximately 119', and will rotate the

Boston

Albany

Buffalo

Danbury

Philadelphia

Raleigh

Atlanta

platform to accommodate required azimuths. AT&T will install six (6) RRHs (remote radio heads) and a surge arrestor on mounts attached to the platform behind the antennas. AT&T will also place a DC power and fiber run from the equipment to the antennas along the existing coaxial cable run on the interior of the pole. The proposed modifications will not extend the height of the approximately 147' structure.

- 2. The proposed changes will not extend the site boundaries. AT&T will install related equipment in its existing shelter and will attach a GPS antenna to the shelter. These changes will be within the existing compound and will have no effect on the site boundaries.
- 3. The proposed changes will not increase the noise level at the existing facility by six decibels or more. The incremental effect of the proposed changes will be negligible.
- 4. The changes to the facility will not increase the calculated "worst case" power density for the combined operations at the site to a level at or above the applicable standard for uncontrolled environments as calculated for a mixed frequency site. As indicated on the attached report prepared by C Squared Systems, LLC, AT&T's operations at the site will result in a power density of approximately 2.29%; the combined site operations will result in a total power density of approximately 23.40%.

Please feel free to contact me by phone at (860) 798-7454 or by e-mail at <u>jgaudet@hpcwireless.com</u> with questions concerning this matter. Thank you for your consideration.


Respectfully yours,


Jennifer Young Gaudet

Juniler Jung Saudet

Attachments

cc: Honorable Scott R. Kaupin, Mayor, Town of Enfield
Matthew W. Coppler, Town Manager, Town of Enfield
Connecticut Light & Power Company (underlying property owner)

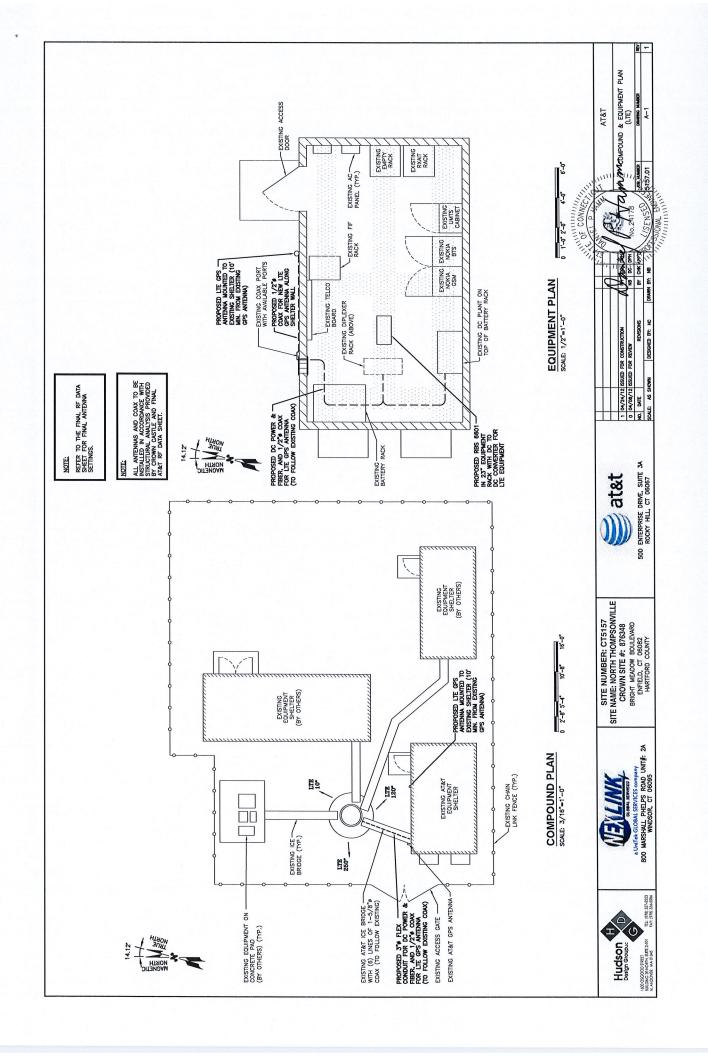

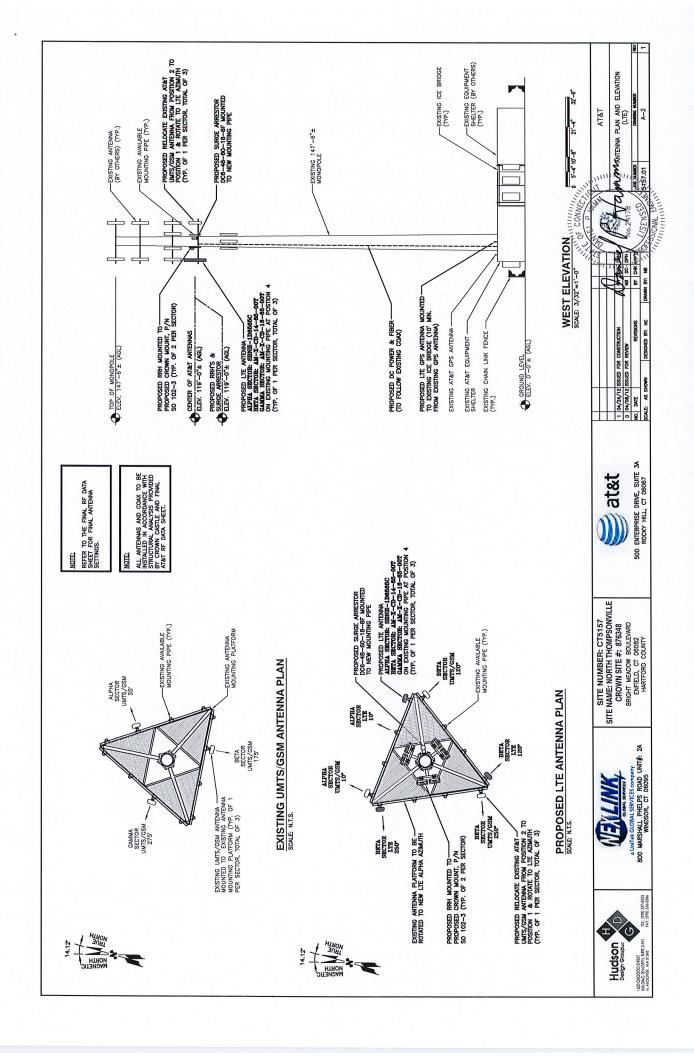

Date: April 22, 2012

Veronica Harris Crown Castle 1200 McArthur Blvd Mahwah, NJ 07430



Subject:

Structural Analysis Report

Carrier Designation:

AT&T Mobility Co-Locate

Carrier Site Number:

Carrier Site Name:

CT5157 AWE-North

Thompsonville

Crown Castle BU Number:

876348 **ENFIELD** 183458

Crown Castle Site Name: Crown Castle JDE Job Number:

484708

Crown Castle Work Order Number: Crown Castle Application Number:

145024 Rev. 1

Engineering Firm Designation:

Crown Castle Designation:

FDH Engineering, Inc. Project Number:

12-04604E S1

Site Data:

Bright Meadow Blvd., ENFIELD, Hartford County, CT

Latitude 42° 1' 14.91", Longitude -72° 35' 6.59"

147.5 Foot - Monopole Tower

Dear Veronica Harris.

FDH Engineering, Inc. is pleased to submit this "Structural Analysis Report" to determine the structural integrity of the above mentioned tower. This analysis has been performed in accordance with the Crown Castle Structural 'Statement of Work' and the terms of Crown Castle Purchase Order Number 460211, in accordance with application 145024, revision 1.

The purpose of the analysis is to determine acceptability of the tower stress level. Based on our analysis we have determined the tower stress level for the structure and foundation, under the following load case, to be:

LC5: Existing + Proposed Equipment

Note: See Table I and Table II for the proposed and existing/reserved loading, respectively.

Sufficient Capacity

The analysis has been performed in accordance with the TIA/EIA-222-F standard and 2005 CT State Building Code based upon a wind speed of 80 mph fastest mile.

All modifications and equipment proposed in this report shall be installed in accordance with the attached drawings for the determined available structural capacity to be effective.

We at FDH Engineering, Inc. appreciate the opportunity of providing our continuing professional services to you and Crown Castle. If you have any questions or need further assistance on this or any other projects please give us a call.

Structural analysis prepared by:

Krystyn Wagner, PE

KupunSwag

Senior Project Engineer

Christopher M. Murphy, PE President

Christopher M. Murphy

CT PE License No. 25842



tnxTower Report - version 6.0.4.0

TABLE OF CONTENTS

1) INTRODUCTION

2) ANALYSIS CRITERIA

Table 1 - Proposed Antenna and Cable Information

Table 2 - Existing and Reserved Antenna and Cable Information

Table 3 - Design Antenna and Cable Information

3) ANALYSIS PROCEDURE

Table 4 - Documents Provided

3.1) Analysis Method

3.2) Assumptions

4) ANALYSIS RESULTS

Table 5 - Section Capacity (Summary)

Table 6 - Tower Components vs. Capacity

4.1) Recommendations

5) APPENDIX A

tnxTower Output

6) APPENDIX B

Base Level Drawing

7) APPENDIX C

Additional Calculations

1) INTRODUCTION

This tower is a 147.5 ft Monopole tower designed by SUMMIT in September of 1998. The tower was originally designed for a wind speed of 85 mph per TIA/EIA-222-F.

2) ANALYSIS CRITERIA

The structural analysis was performed for this tower in accordance with the requirements of TIA/EIA-222-F Structural Standards for Steel Antenna Towers and Antenna Supporting Structures using a fastest mile wind speed of 80 mph with no ice, 37.6 mph with 1 inch ice thickness and 50 mph under service loads.

Table 1 - Proposed Antenna and Cable Information

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note
			andrew	SBNH-1D6565C w/ Mount Pipe		3/4 3/8	
117.0 119.0	6	ericsson	RRUS-11	2			
	1	kmw communications	AM-X-CD-14-65-00T-RET w/ Mount Pipe				
	1	kmw communications	AM-X-CD-16-65-00T-RET w/ Mount Pipe				
		1	raycap	DC6-48-60-18-8F			
116.0	116.0	1	Crown mounts	Side Arm Mount [SO102-3]		***	

Notes:

1) Proposed Equipment

Table 2 - Existing and Reserved Antenna and Cable Information

Mounting Level (ft)			Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note	
		1	crown mounts	Platform Mount [LP 712-1]				
147.0	147.0	6	decibel	DB980H90E-M w/ Mount Pipe	6	1-5/8	1	
		9	sprint mla	SPRINT MLA_ANTENNA w/ Mount Pipe	9	1-5/8	2	
	134.0	6	antel	WPA-80090/4CF w/ Mount Pipe				
132.0	134.0	0	6	decibel	DB948F85T2E-M w/ Mount Pipe	12	1-5/8	1
	132.0	1	crown mounts	Platform Mount [LP 712-1]				
127.0	129.0	12	decibel	DB844H90E-XY w/ Mount Pipe	12	7/8	1	
	127.0	1	crown mounts	Platform Mount [LP 712-1]				
117.0	119.0	3	powerwave technologies	7770.00 w/ Mount Pipe		1-5/8		
117.0	117.0	1	crown mounts	Platform Mount [LP 712-1]	9		1	
	117.0	6	powerwave	LGP21401				

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note
			technologies				
107.0	107.0	1	crown mounts	Side Arm Mount [SO 102-	6	1-5/8	4
107.0	107.0		rfs celwave	APXV18-206517S-C w/ Mount Pipe			
	50.0	1	symmetricom	58532A			
49.0	49.0 49.0		crown mounts	Side Arm Mount [SO 701- 1]	1	1/2	1

Notes:

1) Existing Equipment

2) MLA Equipment, Not Considered in Analysis

Table 3 - Design Antenna and Cable Information

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	
147.5	147.5 147.5 1			14' Low Profile Platform		
147.5	147.5	12	decibel	DB980H PCS		
		1		14' Low Profile Platform		
132	132	12	eti veti (14.17.2.14.00.000.000.000.000.000.0000.0000.0	Panel Antenna (CaAa = 3.9 SF each)		
	***************************************	1		14' Low Profile Platform		
117	117 117			Panel Antenna (CaAa = 3.9 SF each)	1	

3) ANALYSIS PROCEDURE

Table 4 - Documents Provided

Document	Remarks	Reference	Source
4-GEOTECHNICAL REPORTS	Dr. Clarence Welti, PE, PC (December 10, 1997)	1532963	CCISITES
4-TOWER FOUNDATION DRAWINGS/DESIGN/SPECS	Summit Manufacturing, Inc. (September 15, 1998)	1613614	CCISITES
4-TOWER MANUFACTURER DRAWINGS	Summit Manufacturing, Inc. (September 11, 1998)	1613591	CCISITES

3.1) Analysis Method

tnxTower (version 6.0.4.0), a commercially available analysis software package, was used to create a three-dimensional model of the tower and calculate member stresses for various loading cases. Selected output from the analysis is included in Appendix A.

3.2) Assumptions

- 1) Tower and structures were built in accordance with the manufacturer's specifications.
- 2) The tower and structures have been maintained in accordance with the manufacturer's specification.
- 3) The configuration of antennas, transmission cables, mounts and other appurtenances are as specified in Tables 1 and 2 and the referenced drawings.

This analysis may be affected if any assumptions are not valid or have been made in error. FDH Engineering, Inc. should be notified to determine the effect on the structural integrity of the tower.

4) ANALYSIS RESULTS

Table 5 - Section Capacity (Summary)

Section No.	Elevation (ft)	Component Type	Size	Critical Element	P (K)	SF*P_allow (K)	% Capacity	Pass / Fail
L1	147.5 - 108.5	Pole	TP29.4x22x0.25	1	-9.08	1082.89	42.4	Pass
L2	108.5 - 72.25	Pole	TP35.7x28.1885x0.25	2	-13.85	1427.51	85.5	Pass
L3	72.25 - 35.75	Pole	TP42.2x34.355x0.3125	3	-20.42	2108.11	88.6	Pass
L4	35.75 - 0	Pole	TP48.4x40.5705x0.375	4	-30.34	2971.67	84.5	Pass
							Summary	
to Chail Mile Ber, Sammy Brown Common and Co						Pole (L3)	88.6	Pass
FF-SE COLUMN SECURIOR CONTRACTOR SECURIOR SECURI			And the state of the second se			RATING =	88.6	Pass

Table 6 - Tower Component Stresses vs. Capacity - LC5

Notes	Component	Elevation (ft)	% Capacity	Pass / Fail
1	Anchor Rods	0	90.1	Pass
1	Base Plate	0	81.1	Pass
1,2	Base Foundation	0	98.0	Pass

	T
Structure Rating (max from all components) =	98.0%
or detaile rearing (max from all components) -	30.076
	1

Notes:

4.1) Recommendations

1) Coax must be installed as shown in the BLD in Appendix B.

See additional documentation in "Appendix C – Additional Calculations" for calculations supporting the % capacity consumed.

Foundation capacity determined by comparing analysis reactions to design reactions.



C Squared Systems, LLC 65 Dartmouth Drive, Unit A3 Auburn, NH 03032 (603) 644-2800 support@csquaredsystems.com

Calculated Radio Frequency Emissions



CT5157 – AWE-North Thompsonville

Bright Meadow Boulevard, Enfield, CT 06082

Table of Contents

1. Introduction	. 1
2. FCC Guidelines for Evaluating RF Radiation Exposure Limits	1
3. RF Exposure Prediction Methods	.2
4. Calculation Results	
5. Conclusion	4
6. Statement of Certification	.4
Attachment A: References	
Attachment B: FCC Limits for Maximum Permissible Exposure (MPE)	6
Attachment C: AT&T Antenna Data Sheets and Electrical Patterns	. 8
List of Tables	
Table 1: Carrier Information	.3
Table 2: FCC Limits for Maximum Permissible Exposure (MPE)	.6
List of Figures	
Figure 1: Graph of FCC Limits for Maximum Permissible Exposure (MPE)	.7



1. Introduction

The purpose of this report is to investigate compliance with applicable FCC regulations for the proposed modifications to the existing AT&T antenna arrays mounted on the monopole tower located off of Bright Meadow Boulevard in Enfield, CT. The coordinates of the tower are 42-01-14.89 N, 72-35-06.62 W.

AT&T is proposing the following modifications:

1) Install three 700 MHz LTE antennas (one per sector).

2. FCC Guidelines for Evaluating RF Radiation Exposure Limits

In 1985, the FCC established rules to regulate radio frequency (RF) exposure from FCC licensed antenna facilities. In 1996, the FCC updated these rules, which were further amended in August 1997 by OET Bulletin 65 Edition 97-01. These new rules include Maximum Permissible Exposure (MPE) limits for transmitters operating between 300 kHz and 100 GHz. The FCC MPE limits are based upon those recommended by the National Council on Radiation Protection and Measurements (NCRP), developed by the Institute of Electrical and Electronics Engineers, Inc., (IEEE) and adopted by the American National Standards Institute (ANSI).

The FCC general population/uncontrolled limits set the maximum exposure to which most people may be subjected. General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

Public exposure to radio frequencies is regulated and enforced in units of milliwatts per square centimeter (mW/cm²). The general population exposure limits for the various frequency ranges are defined in the attached "FCC Limits for Maximum Permissible Exposure (MPE)" in Attachment B of this report.

Higher exposure limits are permitted under the occupational/controlled exposure category, but only for persons who are exposed as a consequence of their employment and who have been made fully aware of the potential for exposure, and they must be able to exercise control over their exposure. General population/uncontrolled limits are five times more stringent than the levels that are acceptable for occupational, or radio frequency trained individuals. Attachment B contains excerpts from OET Bulletin 65 and defines the Maximum Exposure Limit.

Finally, it should be noted that the MPE limits adopted by the FCC for both general population/uncontrolled exposure and for occupational/controlled exposure incorporate a substantial margin of safety and have been established to be well below levels generally accepted as having the potential to cause adverse health effects.

CT5157 1 May 10, 2012



3. RF Exposure Prediction Methods

The emission field calculation results displayed in the following figures were generated using the following formula as outlined in FCC bulletin OET 65:

Power Density =
$$\left(\frac{1.6^2 \times EIRP}{4\pi \times R^2}\right)$$
 x Off Beam Loss

Where:

EIRP = Effective Isotropic Radiated Power

$$R = \text{Radial Distance} = \sqrt{\left(H^2 + V^2\right)}$$

H = Horizontal Distance from antenna in meters

V = Vertical Distance from radiation center of antenna in meters

Ground reflection factor of 1.6

Off Beam Loss is determined by the selected antenna pattern

These calculations assume that the antennas are operating at 100 percent capacity and power, and that all channels are transmitting simultaneously. Obstructions (trees, buildings, etc.) that would normally attenuate the signal are not taken into account. The calculations assume even terrain in the area of study and do not take into account actual terrain elevations which could attenuate the signal. As a result, the predicted signal levels reported below are much higher than the actual signal levels will be from the finished modifications.



4. Calculation Results

Table 1 below outlines the power density information for the site. Because the proposed AT&T antennas are directional in nature, the majority of the RF power is focused out towards the horizon. As a result, there will be less RF power directed below the antennas relative to the horizon, and consequently lower power density levels around the base of the tower. Please refer to Attachment C for the vertical pattern of the proposed AT&T antennas. The calculated results for AT&T in Table 1 include a nominal 10 dB off-beam pattern loss to account for the lower relative gain below the antennas.

Carrier	Antenna Height (Feet)	Operating Frequency (MHz)	Number of Trans.	ERP Per Transmitter (Watts)	Power Density (mw/cm²)	Limit	%МРЕ
Cingular UMTS	117	880	1	500	0.0131	0.5867	2.24%
Cingular GSM	117	1900	3	467	0.0368	1.0000	3.68%
Pocket	107	2130	3	631	0.0595	1.0000	5.95%
Clearwire	147	2496	2	153	0.0051	1.0000	0.51%
Clearwire	147	11000	1	211	0.0035	1.0000	0.35%
Sprint PCS	147	1957.5	11	122	0.0223	1.0000	2.23%
Verizon	134	869	9	200	0.0360	0.5793	6.22%
Verizon	134	1900	3	200	0.0120	1.0000	1.20%
Nextel	127	851	9	100	0.0201	0.5673	3.54%
XM Sat Radio	142	2340	2	307	0.0109	1.0000	1.09%
AT&T UMTS	119	880	2	565	0.0029	0.5867	0.49%
AT&T UMTS	119	1900	2	875	0.0044	1.0000	0.44%
AT&T LTE	119	734	1	1375	0.0035	0.4893	0.71%
AT&T GSM	119	880	1	283	0.0007	0.5867	0.12%
AT&T GSM	119	1900	4	525	0.0053	1.0000	0.53%
						Total	23.409

Table 1: Carrier Information 1 2 3

.

¹ The existing CSC filing for Cingular should be removed and replaced with the updated AT&T technologies and values provided in Table 1. The power density information for carriers other than AT&T was taken directly from the CSC database dated 3/29/2012. Please note that %MPE values listed are rounded to two decimal points. The total %MPE listed is a summation of each unrounded contribution. Therefore, summing each rounded value may not reflect the total value listed in the table.

² In the case where antenna models are not uniform across all 3 sectors for the same frequency band, the antenna model with the highest gain was used for the calculations to present a worse-case scenario.

³ Antenna height listed for AT&T is in reference to the FDH Engineering Structural Analysis Report dated 4/22/2012.



5. Conclusion

The above analysis verifies that emissions from the existing site will be below the maximum power density levels as outlined by the FCC in the OET Bulletin 65 Ed. 97-01. Even when using conservative methods, the cumulative power density from the proposed transmit antennas at the existing facility is well below the limits for the general public. The highest expected percent of Maximum Permissible Exposure at ground level is 23.40% of the FCC limit.

As noted previously, obstructions (trees, buildings, etc.) that would normally attenuate the signal are not taken into account. As a result, the predicted signal levels are more conservative (higher) than the actual signal levels will be from the finished modifications.

6. Statement of Certification

I certify to the best of my knowledge that the statements in this report are true and accurate. The calculations follow guidelines set forth in ANSI/IEEE Std. C95.3, ANSI/IEEE Std. C95.1 and FCC OET Bulletin 65 Edition 97-01.

Daniel L. Goulet-

C Squared Systems, LLC

May 10, 2012

Date



Attachment A: References

OET Bulletin 65 - Edition 97-01 - August 1997 Federal Communications Commission Office of Engineering & Technology

ANSI C95.1-1982, American National Standard Safety Levels With Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300 kHz to 100 GHz. IEEE-SA Standards Board

<u>IEEE Std C95.3-1991 (Reaff 1997), IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave.</u> IEEE-SA Standards Board



Attachment B: FCC Limits for Maximum Permissible Exposure (MPE)

(A) Limits for Occupational/Controlled Exposure⁴

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (E) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time $ E ^2$, $ H ^2$ or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	$(900/f^2)*$	6
30-300	61.4	0.163	1.0	6
300-1500	_		f/300	6
500-100,000		<u>.</u>	5	6

(B) Limits for General Population/Uncontrolled Exposure⁵

Electric Field Strength (E) (V/m)	Magnetic Field Strength (E) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time $ E ^2$, $ H ^2$ or S (minutes)
614	1.63	(100)*	30
824/f	2.19/f	$(180/f^2)*$	30
27.5	0.073	0.2	30
-	-	f/1500	30
		1.0	30
	Strength (E) (V/m) 614 824/f 27.5	Strength (E) Strength (E) (V/m) (A/m) 614 1.63 824/f 2.19/f 27.5 0.073 - -	Strength (E) Strength (E) Power Density (S) (V/m) (A/m) (mW/cm²) 614 1.63 (100)* 824/f 2.19/f (180/f²)* 27.5 0.073 0.2 - - f/1500

f = frequency in MHz * Plane-wave equivalent power density

Table 2: FCC Limits for Maximum Permissible Exposure (MPE)

-

⁴ Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

⁵ General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.



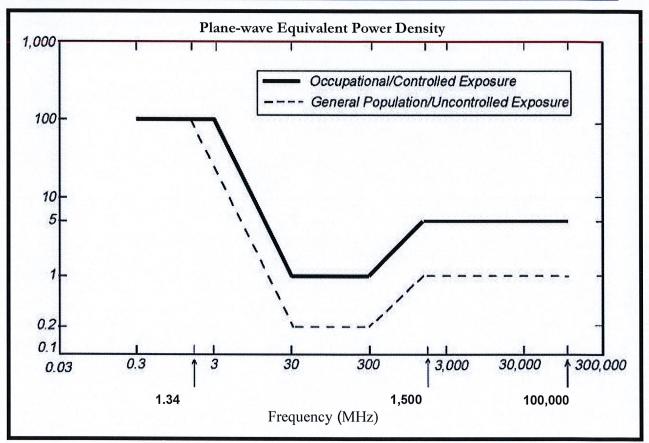


Figure 1: Graph of FCC Limits for Maximum Permissible Exposure (MPE)



Attachment C: AT&T Antenna Data Sheets and Electrical Patterns

700 MHz

Manufacturer: Commscope

Model #: SBNH-1D6565C

Frequency Band: 698-806 MHz


Gain: 13.6 dBd

Vertical Beamwidth: 8.6°

Horizontal Beamwidth: 71°

Polarization: ±45°

Size L x W x D: 96.4" x 11.9" x 7.1"

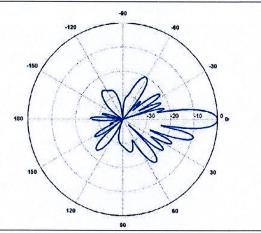

850 MHz

Manufacturer: Powerwave

Model #: 7770.00

Frequency Band: 824-896 MHz


Gain: 11.5 dBd

Vertical Beamwidth: 15°

Horizontal Beamwidth: 82°

Polarization: Dual Linear ±45°

Size L x W x D: 55.0" x 11.0" x 5.0"



1900 MHz

Manufacturer: Powerwave

Model #: 7770.00

Frequency Band: 1850-1990 MHz

Gain: 13.4 dBd

Vertical Beamwidth: 7°

Horizontal Beamwidth: 86°

Polarization: Dual Linear ±45°

Size L x W x D: 55.0" x 11.0" x 5.0"

