



Crown Castle
3530 Toringdon Way Suite 300
Charlotte NC 28277

Tel (704) 405-6600

November 25, 2014

Melanie A. Bachman
Connecticut Siting Council
10 Franklin Square
New Britain, CT 06051

RE: T-Mobile-Exempt Modification - Crown Site BU: 842869
T-Mobile Site ID: CT11733B
Located at: 450 West Main Street, Meriden, CT 06451

Dear Ms. Bachman:

This letter and exhibits are submitted on behalf of T-Mobile. T-Mobile is making modifications to certain existing sites in its Connecticut system in order to implement their 700MHz technology. Please accept this letter and exhibits as notification, pursuant to § 16-50j-73 of the Regulations of Connecticut State Agencies (“R.C.S.A.”), of construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-72(b)(2). In compliance with R.C.S.A. § 16-50j-73, a copy of this letter is being sent to The Honorable Manuel A. Santos, Mayor for the City of Meriden and Hunter’s Ambulance Service, Inc., Property Owner.

T-Mobile plans to modify the existing wireless communications facility owned by Crown Castle and located at **450 West Main Street, Meriden, CT 06451**. Attached are a compound plan and elevation depicting the planned changes (Exhibit-1), and documentation of the structural sufficiency of the structure to accommodate the revised antenna configuration (Exhibit-2). Also included is a power density table report reflecting the modification to T-Mobile’s operations at the site (Exhibit-3).

The changes to the facility do not constitute a modification as defined in Connecticut General Statutes (“C.G.S.”) § 16-50i(d) because the general physical characteristics of the facility will not be significantly changed. Rather, the planned changes to the facility fall squarely within those activities explicitly provided for in the R.C.S.A. § 16-50j-72(b)(2).

1. The proposed modifications will not result in an increase in the height of the existing tower. T-Mobile’s replacement antennas will be located at the same elevation on the existing tower.
2. There will be no proposed modifications to the ground and no extension of boundaries.
3. The proposed modifications will not increase noise levels at the facility by six decibels or more.

4. The operation of the replacement antennas will not increase radio frequency (RF) emissions at the facility to a level at or above the Federal Communications Commission (FCC) adopted safety standard. A cumulative General Power Density table report for T-Mobile's modified facility is included as Exhibit-3.
5. A Structural Modification Report confirming that the tower and foundation can support T-Mobile's proposed modifications is included as Exhibit-2.

For the foregoing reasons, T-Mobile respectfully submits the proposed modifications to the above-reference telecommunications facility constitutes an exempt modification under R.C.S.A. § 16-50j-72(b)(2).

Sincerely,

Jerry Feathers
Real Estate Specialist

Enclosure

Tab 1: Exhibit-1: Compound plan and elevation depicting the planned changes

Tab 2: Exhibit-2: Structural Modification Report

Tab 3: Exhibit-3: General Power Density Table Report (RF Emissions Analysis Report)

cc: The Honorable Manuel A. Santos, Mayor
142 East Main Street
Meriden CT, 06450

cc: Hunter's Ambulance Service, Inc.
450 West Main Street
Meriden, CT 06451



T-MOBILE NORTHEAST LLC

T-MOBILE SITE #: CT11733B
CROWN CASTLE BU #: 842869
SITE NAME: MERIDEN WEST CENTRAL
450-478 WEST MAIN STREET
MERIDEN, CT 06451
NEW HAVEN COUNTY



Dewberry Engineers Inc.
 600 PARSIPPANY ROAD
 SUITE 301
 PARSIPPANY, NJ 07054
 PHONE: 973.739.9400
 FAX: 973.739.9710



T-MOBILE NORTHEAST LLC

4 SYLVAN WAY
 PARSIPPANY, NJ 07054
 PHONE: (973) 397-4800
 FAX: (973) 292-8893


MERIDEN WEST
 CENTRAL

CT11733B

450-478 WEST MAIN STREET
 MERIDEN, CT 06451
 NEW HAVEN COUNTY

THIS DOCUMENT WAS DEVELOPED TO REFLECT A SPECIFIC SITE AND ITS SITE CONDITIONS AND IS NOT TO BE USED FOR ANOTHER SITE OR WHEN OTHER CONDITIONS PERTAIN. REUSE OF THIS DOCUMENT IS AT THE SOLE RISK OF THE USER.

SEAL



THIS DRAWING IS COPYRIGHTED AND IS THE SOLE PROPERTY OF T-MOBILE COMMUNICATIONS, INC. IT IS PRODUCED SOLELY FOR THE USE BY T-MOBILE AND ITS AFFILIATES. REPRODUCTION OR USE OF THIS DRAWING AND/OR THE INFORMATION CONTAINED IN IT IS FORBIDDEN WITHOUT THE WRITTEN PERMISSION OF T-MOBILE.

SCALE

AS SHOWN

REV.	DATE	BY	DESCRIPTION
A	11/11/14	FG	ISSUED FOR REVIEW

REVISIONS

DRAWN BY: FG
 CHECKED BY: BSH
 APPROVED BY: GHN
 DATE: 10/30/14

TITLE


TITLE SHEET

PROJECT NO. 50066258/50070375

T - 1

SHEET NO.

SITE INFORMATION

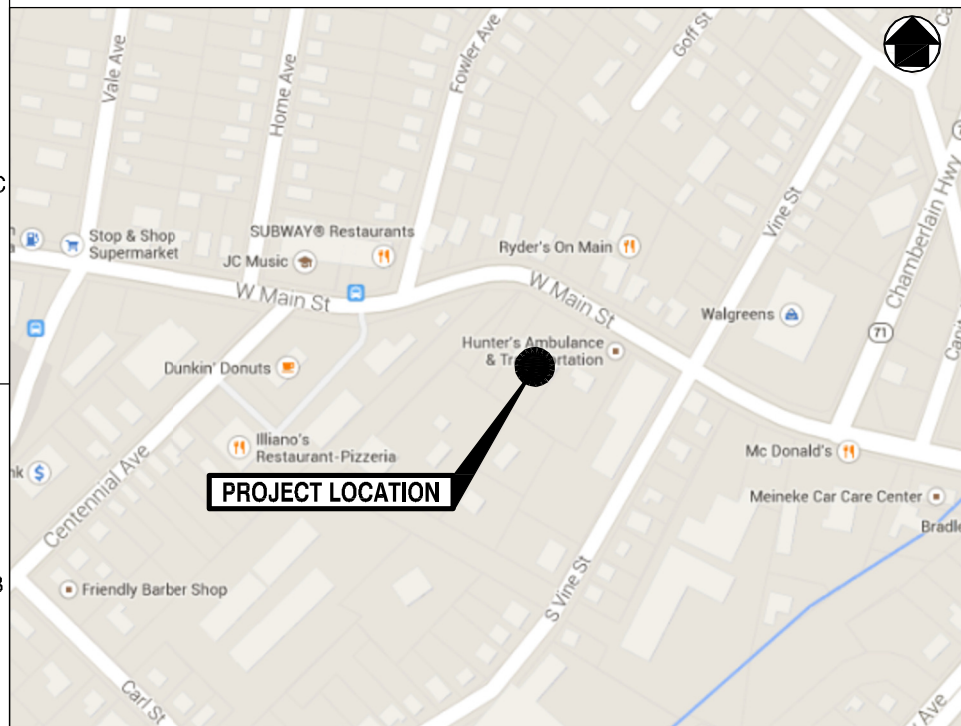

KEY MAP

N.T.S.

DIRECTIONS: (FROM PARSIPPANY):

HEAD NORTHWEST ON SYLVAN WAY. TURN RIGHT ONTO US-202 N. CONTINUE STRAIGHT ONTO LITTLETON RD. TAKE THE RAMP ONTO I-287 N. TAKE THE I-87 S/I-287/NEW YORK THRUWAY EXIT TOWARD TAPPAN ZEE BR/NEW YORK CITY. MERGE ONTO I-287 E/I-87 S. KEEP RIGHT AT THE FORK TO CONTINUE ON I-87 S, FOLLOW SIGNS FOR SAW MILL PKWY S/NEW YORK CITY. TAKE EXIT 8A FOR NY-119/SAW MILL PKWY N TOWARD ELMSFORD. KEEP LEFT, FOLLOW SIGNS FOR SAW MILL RIVER PKWY N/KATONAH AND MERGE ONTO NEW YORK STATE REFERENCE RTE 987D N/SAW MILL RIVER PARKWAY N. KEEP LEFT, FOLLOW SIGNS FOR I-684/BREWSTER AND MERGE ONTO I-684 N. TAKE EXIT 9E FOR INTERSTATE 84 E TOWARD DANBURY. MERGE ONTO I-84 E. TAKE EXIT 27 FOR I-691 E TOWARD MERIDEN. CONTINUE ONTO I-691 E. TAKE EXIT 4 FOR W MAIN ST. TURN RIGHT ONTO MERIDEN-WATERBURY TURNPIKE. CONTINUE ONTO W MAIN ST. SITE WILL BE ON THE RIGHT.

PROJECT INFORMATION

T-MOBILE SITE #: CT11733B
 CROWN CASTLE BU #: 842869
 SITE ADDRESS: 450-478 WEST MAIN STREET
 MERIDEN, CT 06451
 NEW HAVEN COUNTY
 LATITUDE: N 41° 32' 24.24"
 LONGITUDE: W 72° 49' 9.06"
 TOWER OWNER: CROWN CASTLE
 1200 MACARTHUR BLVD., SUITE 200
 MAHWAH, NJ 07430
 CONTACT: WARREN KELLEHER
 (781) 970-0055
 APPLICANT: T-MOBILE NORTHEAST, LLC
 4 SYLVAN WAY
 PARSIPPANY, NJ 07054
 CONTACT: PHONE #: (973) 397-4800
 FAX #: (973) 292-8893
 ENGINEER: DEWBERRY ENGINEERS INC.
 600 PARSIPPANY ROAD, SUITE 301
 PARSIPPANY, NJ 07054
 CONTACT: GREG NAWROTZKI
 (973) 576-9653
 SCOPE OF WORK: ADD (3) NEW ANTENNAS, ADD (3) NEW RRU'S
PROPOSED DESIGN: 702Cu (CS)

SHEET INDEX

SHEET NO.	SHEET DESCRIPTION
T-1	TITLE SHEET
G-1	GENERAL NOTES
C-1	COMPOUND PLAN & EQUIPMENT PLANS
C-2	ANTENNA LAYOUTS & ELEVATIONS
C-3	CONSTRUCTION DETAILS
E-1	GROUNDING NOTES & DETAILS

APPROVALS

T-MOBILE	DATE
OWNER/ LANDLORD	DATE
RF ENGINEER	DATE
ZONING	DATE
CONSTRUCTION	DATE

1 2 3 4 5


E

D

C



B

A

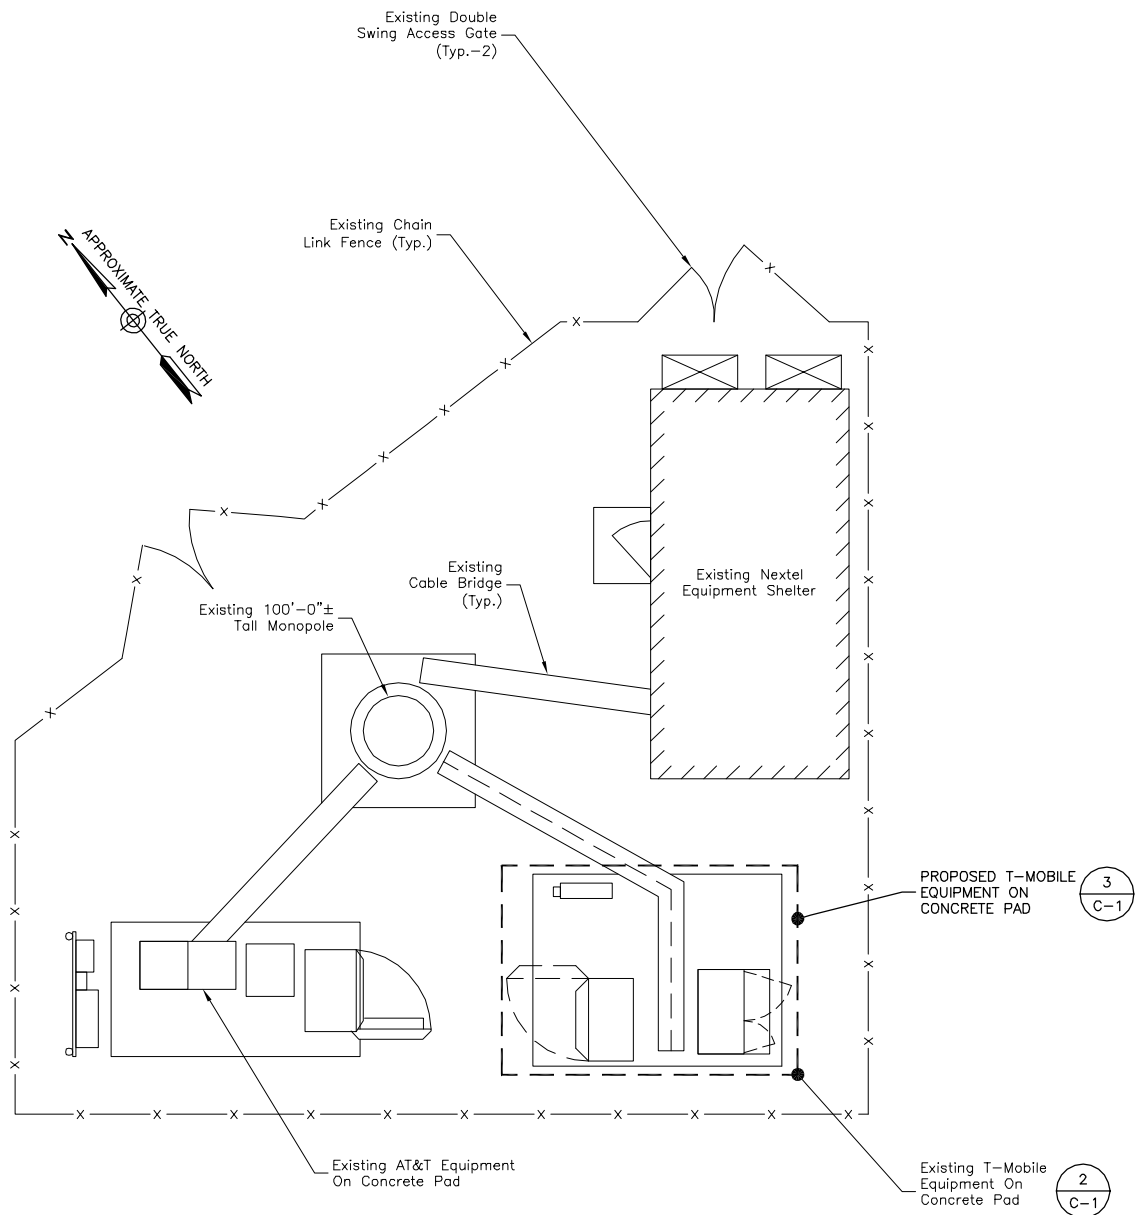


COMPOUND PLAN
 SCALE: 1"=10' FOR 11"x17"
 1"=5' FOR 22"x34"
 0' 5' 10'

- NOTES:**
1. NORTH SHOWN AS APPROXIMATE.
 2. NOT ALL INFORMATION IS SHOWN FOR CLARITY.
 3. MOUNT ALL ANTENNAS, RRU'S, COAX, ETC. IN ACCORDANCE WITH STRUCTURAL ANALYSIS TO BE COMPLETED BY OTHERS.

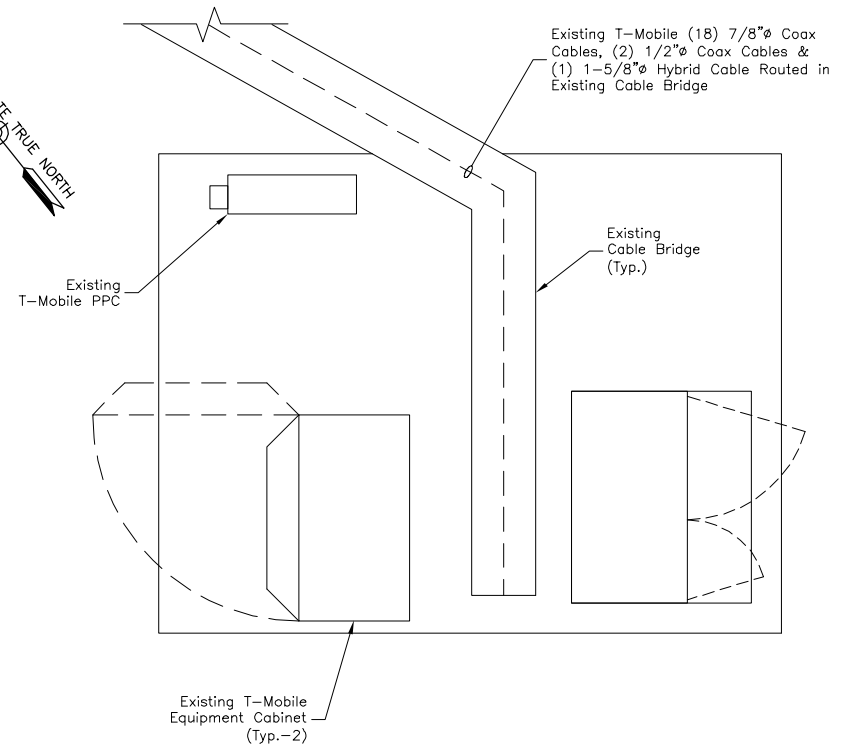

EXISTING EQUIPMENT PLAN
 SCALE: 1/4"=1' FOR 11"x17"
 1/2"=2' FOR 22"x34"
 0 2 4

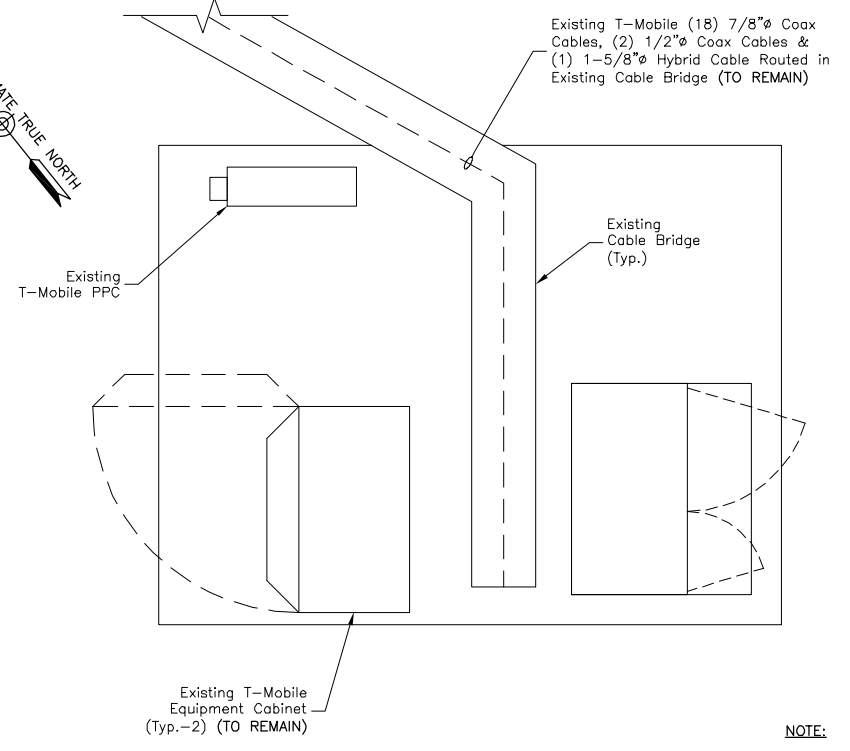

PROPOSED EQUIPMENT PLAN
 SCALE: 1/4"=1' FOR 11"x17"
 1/2"=2' FOR 22"x34"
 0 2 4

- NOTE:**
1. NO EQUIPMENT IS PROPOSED AT GRADE

Dewberry®
 Dewberry Engineers Inc.
 600 PARSIPPANY ROAD
 SUITE 301
 PARSIPPANY, NJ 07054
 PHONE: 973.739.9400
 FAX: 973.739.9710

T-Mobile®
 T-MOBILE NORTHEAST LLC
 4 SYLVAN WAY
 PARSIPPANY, NJ 07054
 PHONE: (973) 397-4600
 FAX: (973) 292-8893

MERIDEN WEST CENTRAL
 CT11733B

450-478 WEST MAIN STREET
 MERIDEN, CT 06451
 NEW HAVEN COUNTY

THIS DOCUMENT WAS DEVELOPED TO REFLECT A SPECIFIC SITE AND ITS SITE CONDITIONS AND IS NOT TO BE USED FOR ANOTHER SITE OR WHEN OTHER CONDITIONS PERTAIN. REUSE OF THIS DOCUMENT IS AT THE SOLE RISK OF THE USER.

SEAL
 JIANG YU, P.E.
 CONNECTICUT LICENSE NO. 0023222

THIS DRAWING IS COPYRIGHTED AND IS THE SOLE PROPERTY OF T-MOBILE COMMUNICATIONS, INC. IT IS PRODUCED SOLELY FOR THE USE BY T-MOBILE AND ITS AFFILIATES. REPRODUCTION OR USE OF THIS DRAWING AND/OR THE INFORMATION CONTAINED IN IT IS FORBIDDEN WITHOUT THE WRITTEN PERMISSION OF T-MOBILE.

SCALE
 AS SHOWN

REV.	DATE	BY	DESCRIPTION
A	11/11/14	FG	ISSUED FOR REVIEW

REVISIONS
 DRAWN BY: FG
 CHECKED BY: BSH
 APPROVED BY: GHN
 DATE: 10/30/14

TITLE

COMPOUND PLAN & EQUIPMENT PLANS

PROJECT NO. 50066258/50070375

C - 1

SHEET NO.

THIS DOCUMENT WAS DEVELOPED TO REFLECT A SPECIFIC SITE AND ITS SITE CONDITIONS AND IS NOT TO BE USED FOR ANOTHER SITE OR WHEN OTHER CONDITIONS PERTAIN. REUSE OF THIS DOCUMENT IS AT THE SOLE RISK OF THE USER.

SEAL

JIANG YU, P.E.
 CONNECTICUT LICENSE NO. 0023222

THIS DRAWING IS COPYRIGHTED AND IS THE SOLE PROPERTY OF T-MOBILE COMMUNICATIONS, INC. IT IS PRODUCED SOLELY FOR THE USE BY T-MOBILE AND ITS AFFILIATES. REPRODUCTION OR USE OF THIS DRAWING AND/OR THE INFORMATION CONTAINED IN IT IS FORBIDDEN WITHOUT THE WRITTEN PERMISSION OF T-MOBILE.

SCALE

AS SHOWN

REV.	DATE	BY	DESCRIPTION
A	11/11/14	FG	ISSUED FOR REVIEW

REVISIONS

DRAWN BY: FG
 CHECKED BY: BSH
 APPROVED BY: GHN
 DATE: 10/30/14


TITLE

**ANTENNA
 LAYOUTS &
 ELEVATIONS**

PROJECT NO. 50066258/50070375

C - 2

SHEET NO.

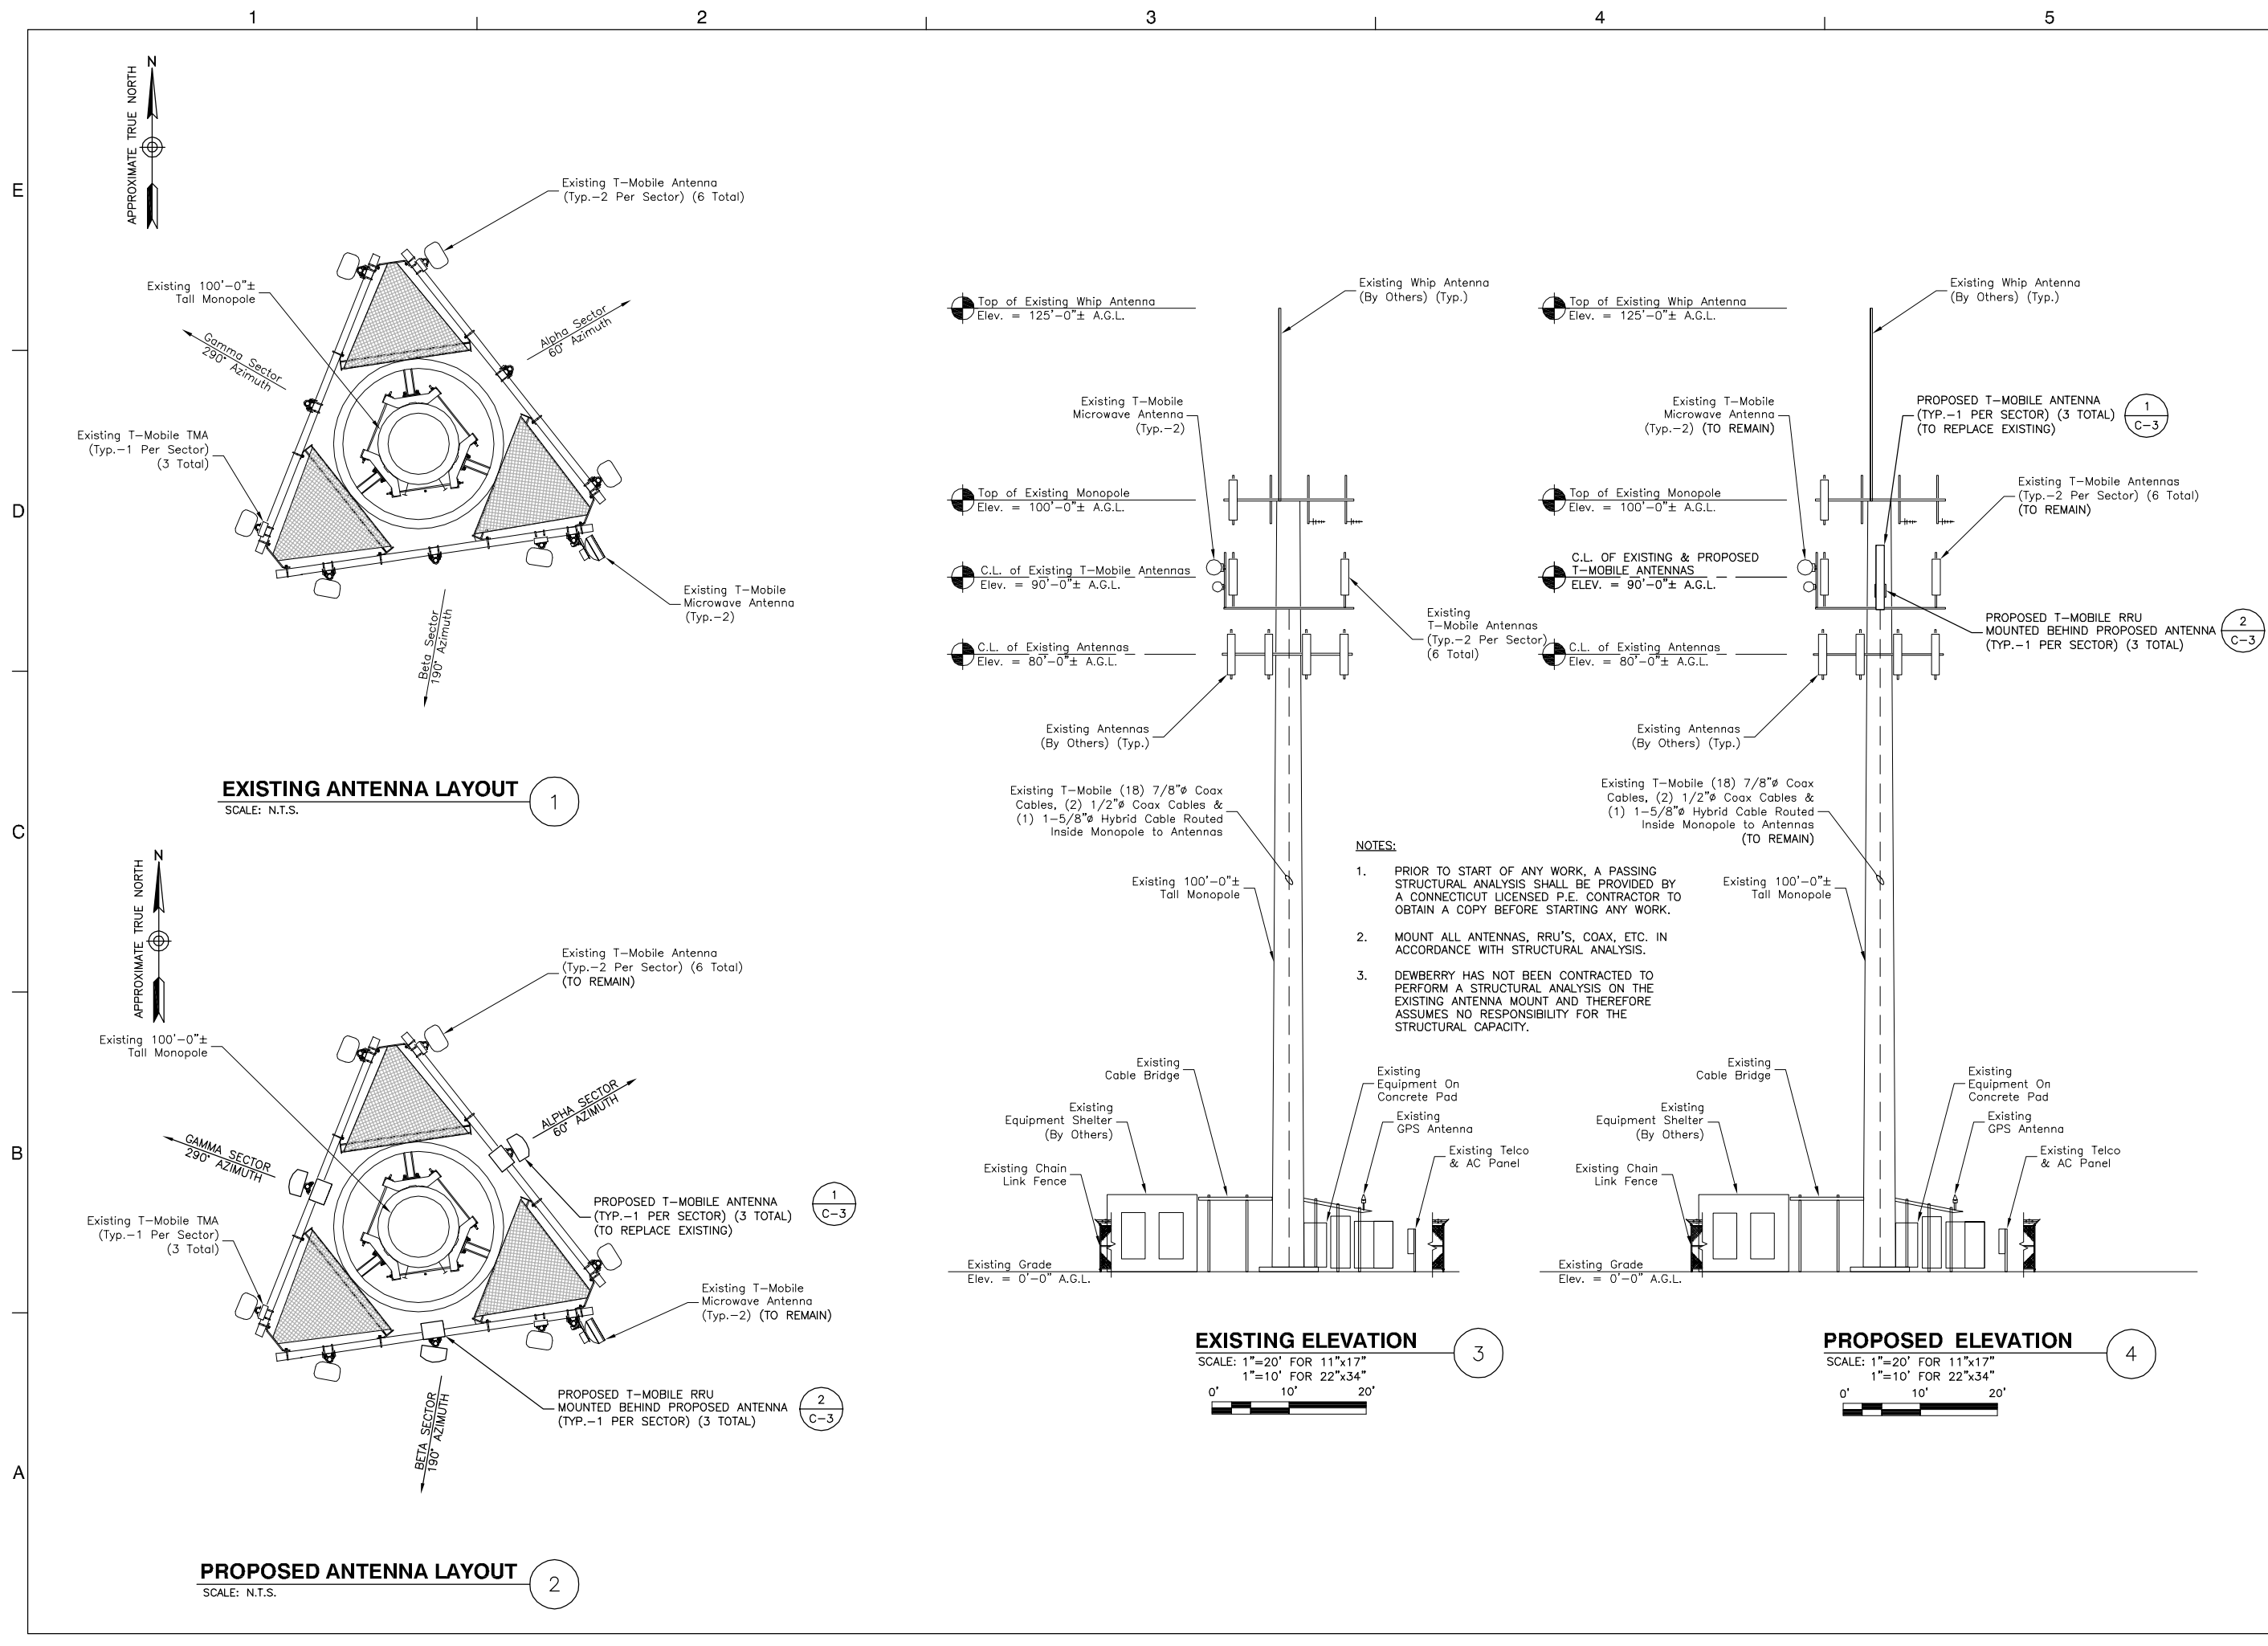

THIS DOCUMENT WAS DEVELOPED TO REFLECT A SPECIFIC SITE AND ITS SITE CONDITIONS AND IS NOT TO BE USED FOR ANOTHER SITE OR WHEN OTHER CONDITIONS PERTAIN. REUSE OF THIS DOCUMENT IS AT THE SOLE RISK OF THE USER.

SEAL

JIANG YU, P.E.
 CONNECTICUT LICENSE NO. 0023222

THIS DRAWING IS COPYRIGHTED AND IS THE SOLE PROPERTY OF T-MOBILE COMMUNICATIONS, INC. IT IS PRODUCED SOLELY FOR THE USE BY T-MOBILE AND ITS AFFILIATES. REPRODUCTION OR USE OF THIS DRAWING AND/OR THE INFORMATION CONTAINED IN IT IS FORBIDDEN WITHOUT THE WRITTEN PERMISSION OF T-MOBILE.

SCALE

AS SHOWN

REV.	DATE	BY	DESCRIPTION
A	11/11/14	FG	ISSUED FOR REVIEW


REVISIONS

DRAWN BY: FG
 CHECKED BY: BSH
 APPROVED BY: GHN
 DATE: 10/30/14

TITLE

CONSTRUCTION DETAILS

PROJECT NO. 50066258/50070375

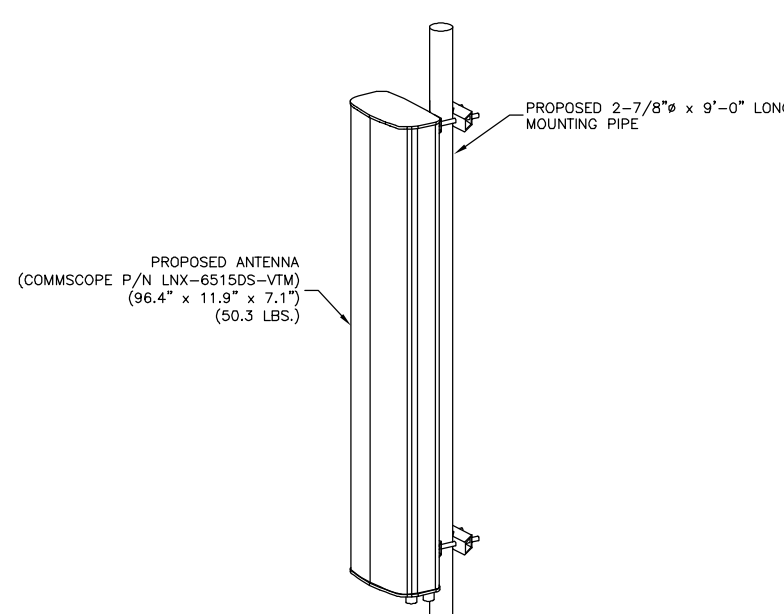


NOTES:

1. MOUNT ANTENNAS PER MANUFACTURER'S RECOMMENDATIONS.
2. GROUND ANTENNAS AND MOUNTS PER MANUFACTURER'S RECOMMENDATIONS AND T-MOBILE STANDARDS.
3. CONFIRM REQUIRED ANTENNAS WITH THE LATEST RFDS.

ISOMETRIC ANTENNA DETAIL

SCALE: N.T.S.

1

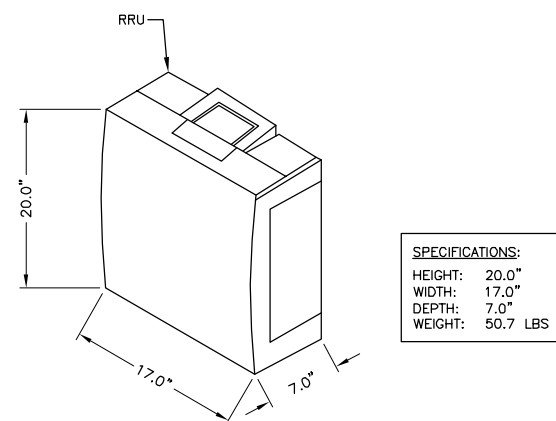

SPECIFICATIONS:
 HEIGHT: 20.0"
 WIDTH: 17.0"
 DEPTH: 7.0"
 WEIGHT: 50.7 LBS

ERICSSON RRUS-11 B12


RRU NOTES:

1. MOUNT EQUIPMENT PER MANUFACTURER'S RECOMMENDATIONS.
2. GROUND EQUIPMENT AND MOUNTS PER MANUFACTURER'S RECOMMENDATIONS AND T-MOBILE STANDARDS.
3. CONFIRM REQUIRED EQUIPMENT WITH THE LATEST RFDS.

RRUS-11 - REMOTE RADIO UNIT

SCALE: N.T.S.

2

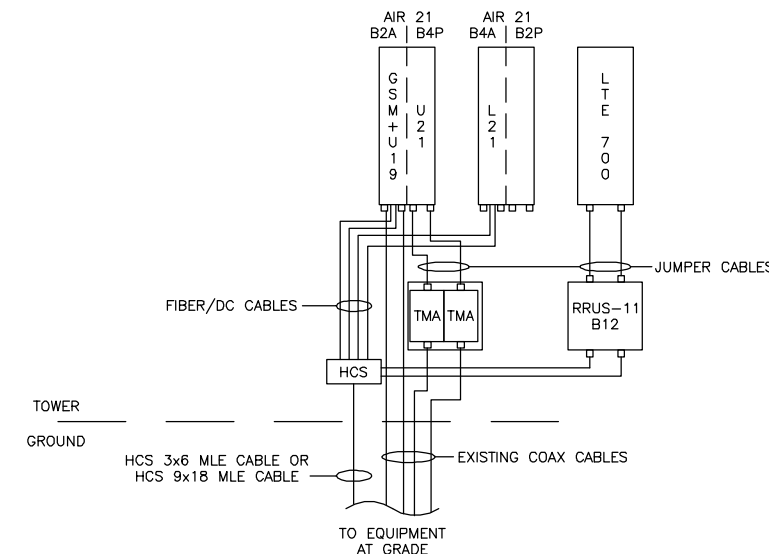

SITE CONFIGURATION 700MHZ


SCALE: N.T.S.

3

DESIGN CONFIGURATION					
	ANTENNAS		COAX		COAX LENGTH
	EXISTING	PROPOSED	EXISTING	PROPOSED	
ALPHA	ERICSSON AIR21 ANTENNA	EXISTING TO REMAIN	(6) 7/8"	-	90'
	-	COMMSCOPE LN-6515DS-VTM			
BETA	ERICSSON AIR21 ANTENNA	EXISTING TO REMAIN	(6) 7/8"	-	90'
	-	COMMSCOPE LN-6515DS-VTM			
GAMMA	ERICSSON AIR21 ANTENNA	EXISTING TO REMAIN	(6) 7/8"	-	90'
	-	COMMSCOPE LN-6515DS-VTM			


GROUNDING NOTES:

- THE CONTRACTOR SHALL REVIEW AND INSPECT THE EXISTING FACILITY GROUNDING SYSTEM AND LIGHTNING PROTECTION SYSTEM (AS DESIGNED AND INSTALLED) FOR STRICT COMPLIANCE WITH THE NEC (AS ADOPTED BY THE AHJ), THE SITE-SPECIFIC (UL, LPI, OR NFPA) LIGHTNING PROTECTION CODE, AND GENERAL COMPLIANCE WITH TELCORDIA AND TIA GROUNDING STANDARDS. THE CONTRACTOR SHALL REPORT ANY VIOLATIONS OR ADVERSE FINDINGS TO THE ENGINEER FOR RESOLUTION.
- ALL GROUND ELECTRODE SYSTEMS (INCLUDING TELECOMMUNICATION, RADIO, LIGHTNING PROTECTION, AND AC POWER GES'S) SHALL BE BONDED TOGETHER, AT OR BELOW GRADE, BY TWO OR MORE COPPER BONDING CONDUCTORS. ALL AVAILABLE GROUNDING ELECTRODES SHALL BE CONNECTED TOGETHER IN ACCORDANCE WITH THE NEC.
- THE CONTRACTOR SHALL PERFORM IEEE FALL-OFF-POTENTIAL RESISTANCE TO EARTH TESTING (PER IEEE 1100 AND 81) FOR GROUND ELECTRODE SYSTEMS. USE OF OTHER METHODS MUST BE PRE-APPROVED BY THE ENGINEER IN WRITING.
- THE CONTRACTOR SHALL FURNISH AND INSTALL SUPPLEMENTAL GROUND ELECTRODES AS NEEDED TO ACHIEVE A TEST RESULT OF 5 OHMS OR LESS ON TOWER SITES AND 10 OHMS OR LESS ON ROOFTOP SITES. WHEN ADDING ELECTRODES, CONTRACTOR SHALL MAINTAIN A MINIMUM DISTANCE BETWEEN THE ADDED ELECTRODE AND ANY OTHER EXISTING ELECTRODE EQUAL TO THE BURIED LENGTH OF THE ROD. IDEALLY, CONTRACTOR SHALL STRIVE TO KEEP THE SEPARATION DISTANCE EQUAL TO TWICE THE BURIED LENGTH OF THE RODS.
- THE CONTRACTOR IS RESPONSIBLE FOR PROPERLY SEQUENCING GROUNDING AND UNDERGROUND CONDUIT INSTALLATION AS TO PREVENT ANY LOSS OF CONTINUITY IN THE GROUNDING SYSTEM OR DAMAGE TO THE CONDUIT.
- METAL CONDUIT AND TRAY SHALL BE GROUNDING AND MADE ELECTRICALLY CONTINUOUS WITH LISTED BONDING FITTINGS OR BY BONDING ACROSS THE DISCONTINUITY WITH 6 AWG COPPER WIRE AND UL APPROVED GROUNDING TYPE CONDUIT CLAMPS.
- METAL RACEWAY SHALL NOT BE USED AS THE NEC REQUIRED EQUIPMENT GROUND CONDUCTOR. STRANDED COPPER CONDUCTORS WITH GREEN INSULATION, SIZED IN ACCORDANCE WITH THE NEC, SHALL BE FURNISHED AND INSTALLED WITH THE POWER CIRCUITS TO TRANSMISSION EQUIPMENT.
- CONNECTIONS TO THE GROUND BUS SHALL NOT BE DOUBLED UP OR STACKED. BACK-TO-BACK CONNECTIONS ON OPPOSITE SIDES OF THE GROUND BUS ARE PERMITTED.
- ALUMINUM CONDUCTOR OR COPPER CLAD STEEL CONDUCTOR SHALL NOT BE USED FOR GROUNDING CONNECTIONS.
- USE OF 90° BENDS IN THE PROTECTION GROUNDING CONDUCTORS SHALL BE AVOIDED WHEN 45° BENDS CAN BE ADEQUATELY SUPPORTED. IN ALL CASES, BENDS SHALL BE MADE WITH A MINIMUM BEND RADIUS OF 8 INCHES.
- EACH INTERIOR TRANSMISSION CABINET FRAME/PLINTH SHALL BE DIRECTLY CONNECTED TO THE MASTER GROUND BAR WITH 6 AWG STRANDED, GREEN INSULATED SUPPLEMENTAL EQUIPMENT GROUND WIRE UNLESS NOTED OTHERWISE IN THE DETAILS. EACH OUTDOOR CABINET FRAME/PLINTH SHALL BE DIRECTLY CONNECTED TO THE BURIED GROUND RING WITH 2 AWG SOLID TIN-PLATED COPPER WIRE UNLESS NOTED OTHERWISE IN THE DETAILS.
- ALL EXTERIOR GROUND CONDUCTORS BETWEEN EQUIPMENT/GROUND BARS AND THE GROUND RING, SHALL BE 2 AWG SOLID TIN-PLATED COPPER UNLESS OTHERWISE INDICATED.
- EXOTHERMIC WELDS SHALL BE USED FOR ALL GROUNDING CONNECTIONS BELOW GRADE. CONNECTIONS TO ABOVE GRADE UNITS SHALL BE MADE WITH EXOTHERMIC WELDS WHERE PRACTICAL OR WITH 2 HOLE MECHANICAL TYPE BRASS CONNECTORS WITH STAINLESS STEEL HARDWARE, INCLUDING SET SCREWS. HIGH PRESSURE CRIMP CONNECTORS MAY ONLY BE USED WITH WRITTEN PERMISSION FROM T-MOBILE MARKET REPRESENTATIVE.
- EXOTHERMIC WELDS SHALL BE PERMITTED ON TOWERS ONLY WITH THE EXPRESS APPROVAL OF THE TOWER MANUFACTURER OR THE CONTRACTORS STRUCTURAL ENGINEER.
- ALL WIRE TO WIRE GROUND CONNECTIONS TO THE INTERIOR GROUND RING SHALL BE FORMED USING HIGH PRESS CRIMPS OR SPLIT BOLT CONNECTORS WHERE INDICATED IN THE DETAILS.
- ON ROOFTOP SITES WHERE EXOTHERMIC WELDS ARE A FIRE HAZARD COPPER COMPRESSION CAP CONNECTORS MAY BE USED FOR WIRE TO WIRE CONNECTIONS. 2 HOLE MECHANICAL TYPE BRASS CONNECTORS WITH STAINLESS STEEL HARDWARE, INCLUDING SET SCREWS SHALL BE USED FOR CONNECTION TO ALL ROOFTOP TRANSMISSION EQUIPMENT AND STRUCTURAL STEEL.
- COAX BRIDGE BONDING CONDUCTORS SHALL BE EXOTHERMICALLY BONDED OR BOLTED TO THE BRIDGE AND THE TOWER GROUND BAR USING TWO-HOLE MECHANICAL TYPE BRASS CONNECTORS AND STAINLESS STEEL HARDWARE.
- APPROVED ANTIOXIDANT COATINGS (I.E., CONDUCTIVE GEL OR PASTE) SHALL BE USED ON ALL COMPRESSION AND BOLTED GROUND CONNECTIONS.
- ALL EXTERIOR GROUND CONNECTIONS SHALL BE COATED WITH A CORROSION RESISTANT MATERIAL.
- MISCELLANEOUS ELECTRICAL AND NON-ELECTRICAL METAL BOXES, FRAMES AND SUPPORTS SHALL BE BONDED TO THE GROUND RING, IN ACCORDANCE WITH THE NEC.
- BOND ALL METALLIC OBJECTS WITHIN 6 FT OF THE BURIED GROUND RING WITH 2 AWG SOLID TIN-PLATED COPPER GROUND CONDUCTOR. DURING EXCAVATION FOR NEW GROUND CONDUCTORS, IF EXISTING GROUND CONDUCTORS ARE ENCOUNTERED, BOND EXISTING GROUND CONDUCTORS TO NEW CONDUCTORS.
- GROUND CONDUCTORS USED IN THE FACILITY GROUND AND LIGHTNING PROTECTION SYSTEMS SHALL NOT BE ROUTED THROUGH METALLIC OBJECTS THAT FORM A RING AROUND THE CONDUCTOR, SUCH AS METALLIC CONDUITS, METAL SUPPORT CLIPS OR SLEEVES THROUGH WALLS OR FLOORS. WHEN IT IS REQUIRED TO BE HOUSED IN CONDUIT TO MEET CODE REQUIREMENTS OR LOCAL CONDITIONS, NON-METALLIC MATERIAL SUCH AS PVC PLASTIC CONDUIT SHALL BE USED. WHERE USE OF METAL CONDUIT IS UNAVOIDABLE (E.G., NON-METALLIC CONDUIT PROHIBITED BY LOCAL CODE) THE GROUND CONDUCTOR SHALL BE BONDED TO EACH END OF THE METAL CONDUIT WITH LISTED BONDING FITTINGS.

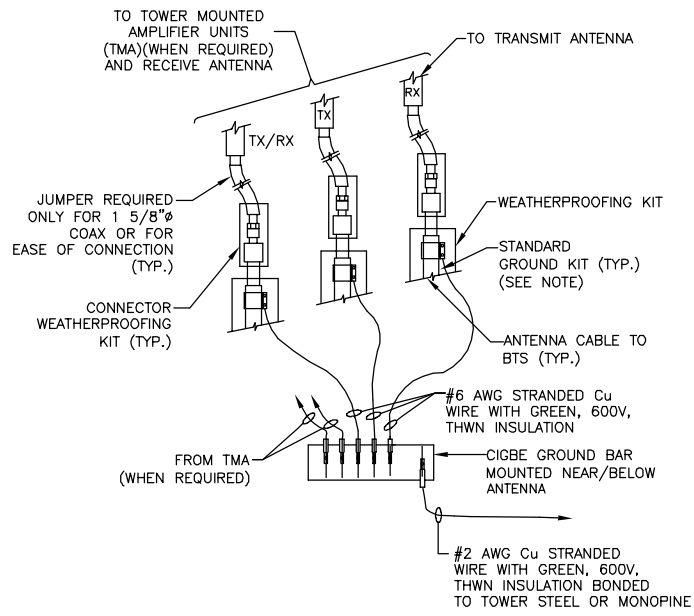



CONNECTION OF GROUND WIRES TO GROUNDING BAR (CIGBE)
SCALE: N.T.S.

1

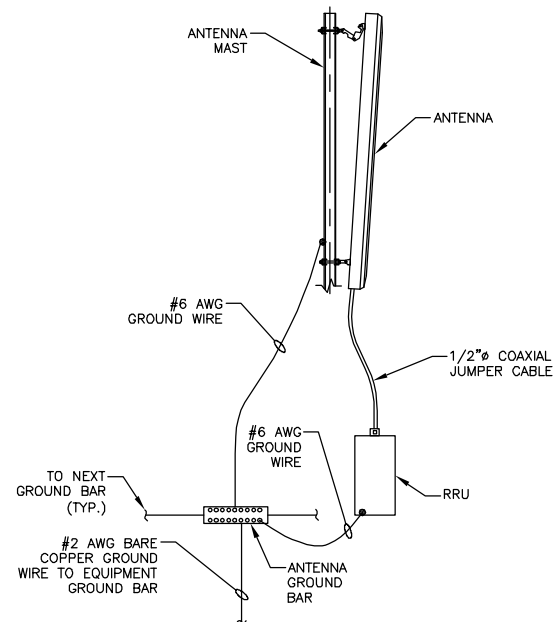

TYPICAL ANTENNA GROUNDING DETAIL
SCALE: N.T.S.

3

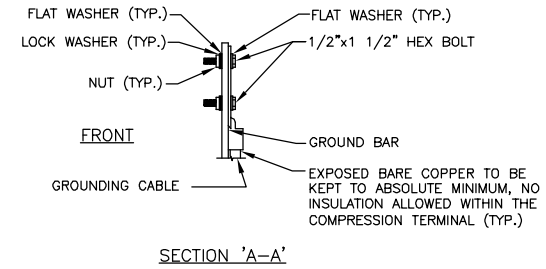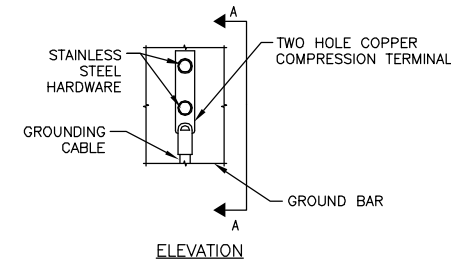


NOTES:

- DOUBLING UP OR STACKING OF CONNECTIONS IS NOT PERMITTED.
- OXIDE INHIBITING COMPOUND TO BE USED AT ALL LOCATIONS.

TYPICAL GROUND BAR MECHANICAL CONNECTION DETAIL

SCALE: N.T.S.

2

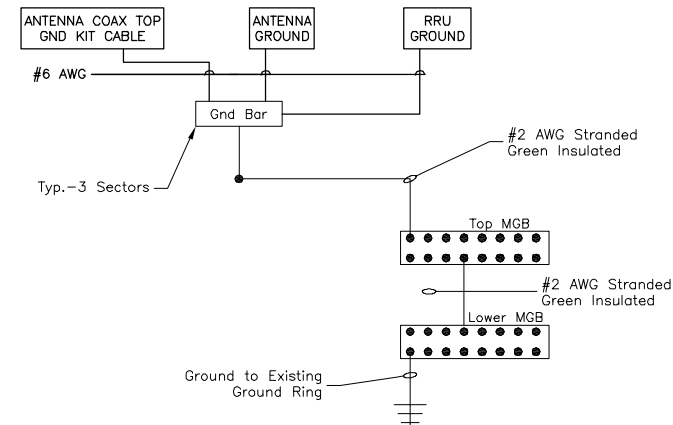

NOTES:

- BOND ANTENNA GROUNDING KIT CABLE TO TOP CIGBE
- BOND ANTENNA GROUNDING KIT CABLE TO BOTTOM CIGBE.
- SCHEMATIC GROUNDING DIAGRAM IS TYPICAL FOR EACH SECTOR.
- VERIFY EXISTING GROUND SYSTEM IS INSTALLED PER T-MOBILE STANDARDS.

SCHEMATIC GROUNDING DIAGRAM

SCALE: N.T.S.

4



Dewberry Engineers Inc.
600 PARSIPPANY ROAD
SUITE 301
PARSIPPANY, NJ 07054
PHONE: 973.739.9400
FAX: 973.739.9710



T-MOBILE NORTHEAST LLC

4 SYLVAN WAY
PARSIPPANY, NJ 07054
PHONE: (973) 397-4800
FAX: (973) 292-8893


MERIDEN WEST
CENTRAL

CT11733B

450-478 WEST MAIN STREET
MERIDEN, CT 06451
NEW HAVEN COUNTY

THIS DOCUMENT WAS DEVELOPED TO REFLECT A SPECIFIC SITE AND ITS SITE CONDITIONS AND IS NOT TO BE USED FOR ANOTHER SITE OR WHEN OTHER CONDITIONS PERTAIN. REUSE OF THIS DOCUMENT IS AT THE SOLE RISK OF THE USER.

SEAL



THIS DRAWING IS COPYRIGHTED AND IS THE SOLE PROPERTY OF T-MOBILE COMMUNICATIONS, INC. IT IS PRODUCED SOLELY FOR THE USE BY T-MOBILE AND ITS AFFILIATES. REPRODUCTION OR USE OF THIS DRAWING AND/OR THE INFORMATION CONTAINED IN IT IS FORBIDDEN WITHOUT THE WRITTEN PERMISSION OF T-MOBILE.

SCALE

AS SHOWN

REV.	DATE	BY	DESCRIPTION
A	11/11/14	FG	ISSUED FOR REVIEW

REVISIONS

DRAWN BY: FG
CHECKED BY: BSH
APPROVED BY: GHN
DATE: 10/30/14

TITLE

GROUNDING NOTES & DETAILS

PROJECT NO. 50066258/50070375

E - 1

SHEET NO.



MORRISON HERSHFIELD

Date: **November 07, 2014**

Ms. Marianne Dunst
Crown Castle
3530 Toringdon Way, Suite 300
Charlotte, NC 28277

Morrison Hershfield
1455 Lincoln Parkway, Suite 500
Atlanta, GA 30346
(770) 379-8500

Subject: Structural Analysis Report

Carrier Designation: *T-Mobile Co-Locate*
Carrier Site Number: CT11733B
Carrier Site Name: CT733/AT&THntr Amblnce FT

Crown Castle Designation:
Crown Castle BU Number: 842869
Crown Castle Site Name: Meriden West Central
Crown Castle JDE Job Number: 313426
Crown Castle Work Order Number: 961366
Crown Castle Application Number: 270002 Rev. 1

Engineering Firm Designation: **Morrison Hershfield Project Number:** CN4-064R1 / 6150003

Site Data: **450-478 West Main Street, Meriden, New Haven County, CT**
Latitude 41° 32' 24.24", Longitude -72° 49' 9.06"
100 Foot - Monopole Tower

Dear Ms. Dunst,

Morrison Hershfield is pleased to submit this “**Structural Analysis Report**” to determine the structural integrity of the above mentioned tower. This analysis has been performed in accordance with the Crown Castle Structural ‘Statement of Work’ and the terms of Crown Castle Purchase Order Number 726417, in accordance with application 270002, revision 1.

The purpose of the analysis is to determine acceptability of the tower stress level. Based on our analysis we have determined the tower stress level for the structure and foundation, under the following load case, to be:

LC7: Existing + Proposed for all applicants **Sufficient Capacity**
Note: See Table I and Table II for the proposed and existing/reserved loading, respectively.

The analysis has been performed for this tower in accordance with the requirements of the 2005 Connecticut State Building Code and the TIA/EIA-222-F Structural Standards for Steel Antenna Tower and Antenna Supporting Structures using a fastest mile wind speed of 85 mph with no ice, 37.6 mph with 0.75 in ice thickness and 50 mph under service loads.

We at *Morrison Hershfield* appreciate the opportunity of providing our continuing professional services to you and Crown Castle. If you have any questions or need further assistance on this or any other projects please give us a call.

Respectfully submitted by:



G. Lance Cooke, P.E. (CT License No. PEN.0028133)
Senior Engineer

TABLE OF CONTENTS

1) INTRODUCTION

2) ANALYSIS CRITERIA

Table 1 - Proposed Antenna and Cable Information

Table 2 - Existing and Reserved Antenna and Cable Information

Table 3 - Design Antenna and Cable Information

3) ANALYSIS PROCEDURE

Table 4 - Documents Provided

3.1) Analysis Method

3.2) Assumptions

4) ANALYSIS RESULTS

Table 5 - Section Capacity (Summary)

Table 6 – Tower Components vs. Capacity

4.1) Recommendations

5) APPENDIX A

tnxTower Output

6) APPENDIX B

Base Level Drawing

7) APPENDIX C

Additional Calculations

1) INTRODUCTION

This tower is a 100 ft monopole tower designed by Glen Martin Engineering, Inc., in December of 2003. The tower was originally designed for a wind speed of 85 mph per TIA/EIA-222-F.

2) ANALYSIS CRITERIA

The structural analysis was performed for this tower in accordance with the requirements of TIA/EIA-222-F Structural Standards for Steel Antenna Towers and Antenna Supporting Structures using a fastest mile wind speed of 85 mph with no ice, 37.6 mph with 0.75 inch ice thickness and 50 mph under service loads.

Table 1 - Proposed Antenna and Cable Information

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note
86.0	90.0	3	Commscope	LNx-6515DS-VTM w/ pipe mount	-	-	-
		3	Ericsson	RRUS 11 B12			

Table 2 - Existing and Reserved Antenna and Cable Information

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note	
100.0	103.0	1	Raycap	DC6-48-60-18-8F	-	-	1	
	101.0	3	CCI Antennas	HPA-65R-BUU-H8 w/ pipe mount	2	3/4 3/8	2	
		6	CCI Antennas	HPA-65R-BUU-H8 w/ pipe mount				
	100.0	100.0	1	Commscope	MTC 3607	6	1-1/4 3/4 3/8 Conduit	1
			3	Ericsson	RRUS 11-700			
			3	KMW Communications	AM-X-CD-16-65-00T-RET w/ Mount Pipe			
			3	Ericsson	RRUS A2 Module			
			3	Ericsson	RRUS-11 1900 MHz			
	86.0	90.0	1	Andrew	VHLP2-13	1 18 2	1-5/8 7/8 1/2	1
6			CSS	CSS-DTMA-BRS	3			
3			Ericsson	AIR 21 B2A B4P w/ pipe mount				
86.0		86.0	3	Ericsson	AIR 21 B4A B2P w/ pipe mount			
			3	Ericsson	KRY 112 71/2			
			1	-	Platform Mount [LP 305-1]			
			1	Andrew	VHLP1-23			
78.0	78.0	3	-	Side Arm Mount [SO 102-1]	-	-	1	
		3	Alcatel Lucent	1900MHz RRH				
		3	Alcatel Lucent	800 EXTERNAL NOTCH FILTER				

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note
		3	Alcatel Lucent	TME-800MHZ RRH			
76.0	79.0	3	Alcatel Lucent	TD-RRH8x20-25	1 3	1-1/4 5/16	2
		3	RFS/Celwave	APXVTM14-C-120 w/ Mount Pipe			
		3	RFS/Celwave	APXVSPP18-C-A20 w/ Mount Pipe	3	1-1/4	1
	76.0	1	-	Platform Mount [LP 303-1]			
65.0	65.0	1	-	Platform Mount [LP 303-1]	2	1-5/8	2
		3	Alcatel Lucent	RRH2X40-AWS			
		3	Alcatel Lucent	RRH2x40 700			
		6	Antel	BXA-171063/12CF w/ Mount Pipe			
		6	Antel	BXA-70063/6CF w/ Mount Pipe			
		2	RFS/Celwave	DB-T1-6Z-8AB-0Z			

Notes:

- 1) Existing equipment that is to remain on the tower.
- 2) This equipment is reserved and has been considered in this analysis.
- 3) The existing equipment is to be removed and has not been considered in the calculations for this analysis.

Table 3 - Design Antenna and Cable Information

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
Unknown						

3) ANALYSIS PROCEDURE

Table 4 - Documents Provided

Document	Remarks	Reference	Source
4-GEOTECHNICAL REPORTS	Tectonic, Job No. 2650.DT378, dated 08/28/2002	4529388	CCISITES
4-TOWER FOUNDATION DRAWINGS/DESIGN/SPECS	Glen Martin Engineering, Inc., Site No. CT-378. dated 12/15/2003	4529387	CCISITES
4-TOWER MANUFACTURER DRAWINGS	Glen Martin Engineering, Inc., Site No. CT-378. dated 06/04/2003	4713237	CCISITES
4-TOWER STRUCTURAL ANALYSIS REPORTS	Morrison Hershfield, Project No. CN4-064 / 6150003, Dated 10/27/2014	5366024	CCISITES

3.1) Analysis Method

tnxTower (version 6.1.4.1), a commercially available analysis software package, was used to create a three-dimensional model of the tower and calculate member stresses for various loading cases. Selected output from the analysis is included in Appendix A.

3.2) Assumptions

- 1) The tower and structures were built in accordance with the manufacturer’s specifications and applicable ANSI/TIA/EIA standards.
- 2) The tower and structures have been maintained in accordance with the manufacturer’s specification.
- 3) The configuration of antennas, transmission cables, mounts and other appurtenances are as specified in Tables 1 and 2 and the referenced drawings.
- 4) The foundation was properly designed and constructed for the original design loads.

This analysis may be affected if any assumptions are not valid or have been made in error. Morrison Hershfield should be notified to determine the effect on the structural integrity of the tower.

4) ANALYSIS RESULTS

Table 5 - Section Capacity (Summary)

Section No.	Elevation (ft)	Component Type	Size	Critical Element	P (K)	SF*P_allow (K)	% Capacity	Pass / Fail
L1	100 - 47	Pole	TP40.72x28x0.3125	1	-16.25	2019.47	52.8	Pass
L2	47 - 0	Pole	TP51.37x38.655x0.375	2	-28.58	3171.35	73.0	Pass
							Summary	
						Pole (L2)	73.0	Pass
						Rating =	73.0	Pass

Table 6 - Tower Component Stresses vs. Capacity – LC7

Notes	Component	Elevation (ft)	% Capacity	Pass / Fail
1	Anchor Rods	0	84.2	Pass
1	Base Plate	0	52.4	Pass
1	Foundation Overturning	0	78.3	Pass
1	Foundation Bearing	0	36.6	Pass

Structure Rating (max from all components) =	84.2%
---	--------------

Notes:


- 1) See additional documentation in “Appendix C – Additional Calculations” for calculations supporting the % capacity consumed.

4.1) Recommendations

The tower and its foundation have sufficient capacity to carry the existing, reserved and proposed loads. No modifications are required at this time.

APPENDIX A
TNXTOWER OUTPUT

Section	1	2
Length (ft)	53'	53'
Number of Sides	16	16
Thickness (in)	0.3125	0.3750
Socket Length (ft)	6'	9.6
Top Dia (in)	28.0000	38.6550
Bot Dia (in)	40.7200	51.3700
Grade	A572-65	A572-65
Weight (K)	6.1	15.8

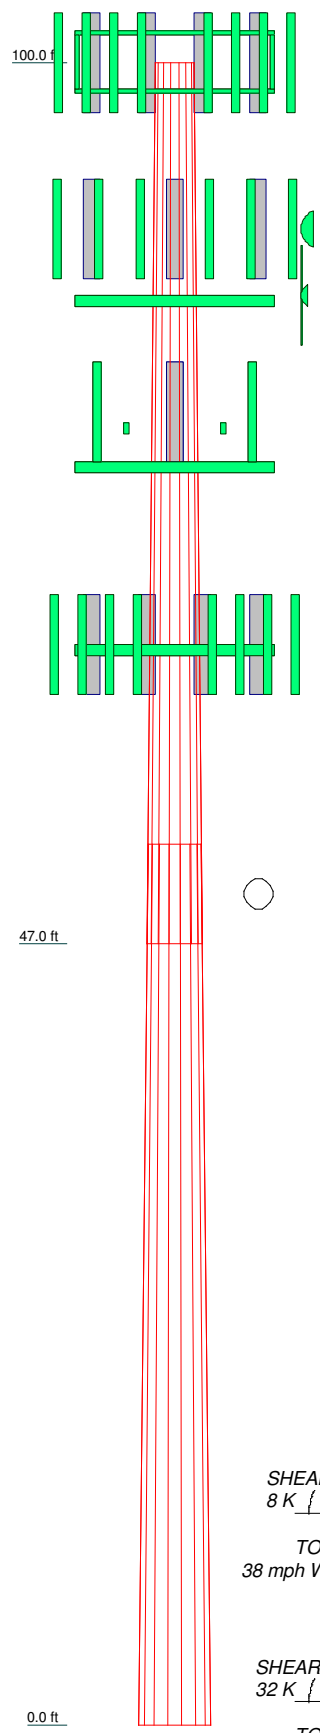

DESIGNED APPURTENANCE LOADING


TYPE	ELEVATION	TYPE	ELEVATION
AM-X-CD-16-65-00T-RET w/ Mount Pipe	100	VHLP2-13	86
AM-X-CD-16-65-00T-RET w/ Mount Pipe	100	TME-800MHZ RRH	78
AM-X-CD-16-65-00T-RET w/ Mount Pipe	100	1900MHz RRH	78
AM-X-CD-16-65-00T-RET w/ Mount Pipe	100	1900MHz RRH	78
RRUS 11-700	100	800 EXTERNAL NOTCH FILTER	78
RRUS 11-700	100	800 EXTERNAL NOTCH FILTER	78
RRUS 11-700	100	800 EXTERNAL NOTCH FILTER	78
DC6-48-60-18-8F	100	6' x 2" Mount Pipe	78
(2) HPA-65R-BUU-H8 w/ pipe mount	100	6' x 2" Mount Pipe	78
(2) HPA-65R-BUU-H8 w/ pipe mount	100	6' x 2" Mount Pipe	78
(2) HPA-65R-BUU-H8 w/ pipe mount	100	Side Arm Mount [SO 102-1]	78
HPA-65R-BUU-H8 w/ pipe mount	100	Side Arm Mount [SO 102-1]	78
HPA-65R-BUU-H8 w/ pipe mount	100	Side Arm Mount [SO 102-1]	78
HPA-65R-BUU-H8 w/ pipe mount	100	TME-800MHZ RRH	78
RRUS-11 1900 MHz	100	TME-800MHZ RRH	78
RRUS-11 1900 MHz	100	APXVSP18-C-A20 w/ Mount Pipe	76
RRUS A2 Module	100	Platform Mount [LP 303-1]	76
RRUS A2 Module	100	APXVTM14-C-120 w/ Mount Pipe	76
RRUS A2 Module	100	APXVTM14-C-120 w/ Mount Pipe	76
RRUS A2 Module	100	APXVTM14-C-120 w/ Mount Pipe	76
DC6-48-60-18-8F	100	TD-RRH8x20-25	76
MTC 3607	100	TD-RRH8x20-25	76
AIR 21 B4A B2P w/ pipe mount	86	TD-RRH8x20-25	76
AIR 21 B4A B2P w/ pipe mount	86	APXVSP18-C-A20 w/ Mount Pipe	76
AIR 21 B4A B2P w/ pipe mount	86	APXVSP18-C-A20 w/ Mount Pipe	76
AIR 21 B2A B4P w/ pipe mount	86	(2) BXA-171063/12CF w/ Mount Pipe	65
AIR 21 B2A B4P w/ pipe mount	86	(2) BXA-70063/6CF w/ Mount Pipe	65
AIR 21 B2A B4P w/ pipe mount	86	(2) BXA-70063/6CF w/ Mount Pipe	65
AIR 21 B2A B4P w/ pipe mount	86	(2) BXA-70063/6CF w/ Mount Pipe	65
KRY 112 71/2	86	RRH2x40 700	65
KRY 112 71/2	86	RRH2x40 700	65
KRY 112 71/2	86	RRH2x40 700	65
6' x 2" Mount Pipe	86	RRH2X40-AWS	65
Platform Mount [LP 305-1]	86	RRH2X40-AWS	65
LNX-6515DS-VTM w/ pipe mount	86	RRH2X40-AWS	65
LNX-6515DS-VTM w/ pipe mount	86	DB-T1-6Z-8AB-0Z	65
LNX-6515DS-VTM w/ pipe mount	86	DB-T1-6Z-8AB-0Z	65
RRUS 11 B12	86	Platform Mount [LP 303-1]	65
RRUS 11 B12	86	(2) BXA-171063/12CF w/ Mount Pipe	65
RRUS 11 B12	86	(2) BXA-171063/12CF w/ Mount Pipe	65
VHLP1-23	86		

MATERIAL STRENGTH

GRADE	Fy	Fu	GRADE	Fy	Fu
A572-65	65 ksi	80 ksi			

TOWER DESIGN NOTES

1. Tower is located in New Haven County, Connecticut.
2. Tower designed for a 85 mph basic wind in accordance with the TIA/EIA-222-F Standard.
3. Tower is also designed for a 38 mph basic wind with 0.75 in ice. Ice is considered to increase in thickness with height.
4. Deflections are based upon a 50 mph wind.
5. TOWER RATING: 73%

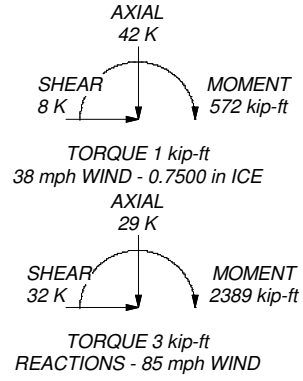

Morrison Hershfield
 1455 Lincoln Parkway, Suite 500
 Atlanta, GA 30346
 Phone: (770) 379-8500
 FAX: (770) 379-8501

Job: **CN4-064R1 / 6150003**
 Project: **842869 / Meriden West Central**
 Client: Crown Castle USA
 Code: TIA/EIA-222-F
 Path: D:\CHAITANYA\CBSD\Crown Castle\Crown Analysis\414\4064R1_842869_MERIDEN WEST CENTRAL\CN4-064R1_SAAnalysis\CN4-064R1.dwg
 Drawn by: Chaitanya Katari
 Date: 11/07/14
 App'd:
 Scale: NTS
 Dwg No. E-1

Tower Input Data

There is a pole section.
 This tower is designed using the TIA/EIA-222-F standard.
 The following design criteria apply:
 Tower is located in New Haven County, Connecticut.
 Basic wind speed of 85 mph.
 Nominal ice thickness of 0.7500 in.
 Ice thickness is considered to increase with height.
 Ice density of 56 pcf.
 A wind speed of 38 mph is used in combination with ice.
 Temperature drop of 50 °F.
 Deflections calculated using a wind speed of 50 mph.
 A non-linear (P-delta) analysis was used.
 Pressures are calculated at each section.
 Stress ratio used in pole design is 1.333.
 Local bending stresses due to climbing loads, feed line supports, and appurtenance mounts are not considered.

Options

- | | | |
|--|--|--|
| Consider Moments - Legs
Consider Moments - Horizontals
Consider Moments - Diagonals
Use Moment Magnification
✓ Use Code Stress Ratios
✓ Use Code Safety Factors - Guys
✓ Escalate Ice
Always Use Max Kz
Use Special Wind Profile
Include Bolts In Member Capacity
Leg Bolts Are At Top Of Section
Secondary Horizontal Braces Leg
Use Diamond Inner Bracing (4 Sided)
Add IBC .6D+W Combination | Distribute Leg Loads As Uniform
Assume Legs Pinned
✓ Assume Rigid Index Plate
✓ Use Clear Spans For Wind Area
Use Clear Spans For KL/r
Retension Guys To Initial Tension
✓ Bypass Mast Stability Checks
✓ Use Azimuth Dish Coefficients
✓ Project Wind Area of Appurt.
Autocalc Torque Arm Areas
SR Members Have Cut Ends
✓ Sort Capacity Reports By Component
Triangulate Diamond Inner Bracing
Use TIA-222-G Tension Splice
Capacity Exemption | Treat Feedline Bundles As Cylinder
Use ASCE 10 X-Brace Ly Rules
Calculate Redundant Bracing Forces
Ignore Redundant Members in FEA
SR Leg Bolts Resist Compression
All Leg Panels Have Same Allowable
Offset Girt At Foundation
✓ Consider Feedline Torque
Include Angle Block Shear Check
<div style="text-align: center; background-color: #e0e0e0; padding: 2px;">Poles</div> ✓ Include Shear-Torsion Interaction
Always Use Sub-Critical Flow
Use Top Mounted Sockets |
|--|--|--|

Tapered Pole Section Geometry

Section	Elevation ft	Section Length ft	Splice Length ft	Number of Sides	Top Diameter in	Bottom Diameter in	Wall Thickness in	Bend Radius in	Pole Grade
L1	100'-47'	53'	6'	16	28.0000	40.7200	0.3125	1.2500	A572-65 (65 ksi)
L2	47'-0'	53'		16	38.6550	51.3700	0.3750	1.5000	A572-65 (65 ksi)

Tapered Pole Properties

Section	Tip Dia. in	Area in ²	I in ⁴	r in	C in	I/C in ³	J in ⁴	It/Q in ²	w in	w/t
L1	28.5486	27.6010	2673.0452	9.8567	14.2800	187.1880	5386.5635	13.6472	4.9501	15.84
	41.5178	40.2812	8308.8518	14.3851	20.7672	400.0949	16743.509	19.9169	7.4814	23.94
L2	40.8799	45.7925	8477.1936	13.6277	19.7141	430.0077	17082.742	22.6420	6.9461	18.523
	52.3764	61.0028	20040.986	18.1542	26.1987	764.9611	40385.418	30.1627	9.4764	25.27

Tower Elevation	Gusset Area (per face)	Gusset Thickness	Gusset Grade	Adjust. Factor A_r	Adjust. Factor A_r	Weight Mult.	Double Angle Stitch Bolt Spacing Diagonals	Double Angle Stitch Bolt Spacing Horizontals
ft	ft ²	in					in	in
L1 100'-47'				1	1	1		
L2 47'-0'				1	1	1		

Feed Line/Linear Appurtenances - Entered As Area

Description	Face or Leg	Allow Shield	Component Type	Placement	Total Number		$C_A A_A$	Weight
				ft			ft ² /ft	plf
Safety Line 3/8"	C	No	CaAa (Out Of Face)	100' - 8'	1	No Ice	0.04	0.22
						1/2" Ice	0.14	0.75
						1" Ice	0.24	1.28
						2" Ice	0.44	2.34
						4" Ice	0.84	4.46
Climbing Rungs	C	No	CaAa (Out Of Face)	100' - 8'	1	No Ice	0.07	1.80
						1/2" Ice	0.17	2.54
						1" Ice	0.27	3.89
						2" Ice	0.47	8.41
						4" Ice	0.87	24.80

LDF6-50A(1-1/4")	A	No	Inside Pole	100' - 6'	6	No Ice	0.00	0.66
						1/2" Ice	0.00	0.66
						1" Ice	0.00	0.66
						2" Ice	0.00	0.66
						4" Ice	0.00	0.66
2" Conduit	A	No	Inside Pole	100' - 6'	1	No Ice	0.00	2.80
						1/2" Ice	0.00	2.80
						1" Ice	0.00	2.80
						2" Ice	0.00	2.80
						4" Ice	0.00	2.80
FB-L98B-034-XXXXXX(3/8")	A	No	Inside Pole	100' - 6'	1	No Ice	0.00	0.05
						1/2" Ice	0.00	0.05
						1" Ice	0.00	0.05
						2" Ice	0.00	0.05
						4" Ice	0.00	0.05
WR-VG86ST-BRD(3/4)	A	No	Inside Pole	100' - 6'	2	No Ice	0.00	0.58
						1/2" Ice	0.00	0.58
						1" Ice	0.00	0.58
						2" Ice	0.00	0.58
						4" Ice	0.00	0.58
FB-L98B-034-XXXXXX(3/8")	A	No	Inside Pole	100' - 6'	1	No Ice	0.00	0.05
						1/2" Ice	0.00	0.05
						1" Ice	0.00	0.05
						2" Ice	0.00	0.05
						4" Ice	0.00	0.05
WR-VG86ST-BRD(3/4)	A	No	Inside Pole	100' - 6'	2	No Ice	0.00	0.58
						1/2" Ice	0.00	0.58
						1" Ice	0.00	0.58
						2" Ice	0.00	0.58
						4" Ice	0.00	0.58

LDF4-50A(1/2")	C	No	Inside Pole	86' - 6'	2	No Ice	0.00	0.15
						1/2" Ice	0.00	0.15
						1" Ice	0.00	0.15
						2" Ice	0.00	0.15
						4" Ice	0.00	0.15
LDF5-50A(7/8")	C	No	Inside Pole	86' - 6'	18	No Ice	0.00	0.33
						1/2" Ice	0.00	0.33
						1" Ice	0.00	0.33
						2" Ice	0.00	0.33
						4" Ice	0.00	0.33
MLE Hybrid 9Power/18Fiber RL 2(1 5/8)	C	No	Inside Pole	86' - 6'	1	No Ice	0.00	1.07
						1/2" Ice	0.00	1.07
						1" Ice	0.00	1.07

Description	Face or Leg	Allow Shield	Component Type	Placement ft	Total Number		C _A A _A ft ² /ft	Weight plf
						2" Ice	0.00	1.07
						4" Ice	0.00	1.07

HB114-13U3M12-XXXF(1-1/4")	B	No	Inside Pole	76' - 6'	2	No Ice	0.00	0.99
						1/2" Ice	0.00	0.99
						1" Ice	0.00	0.99
						2" Ice	0.00	0.99
						4" Ice	0.00	0.99
HB114-21U3M12-XXXF(1-1/4")	B	No	Inside Pole	76' - 6'	1	No Ice	0.00	1.22
						1/2" Ice	0.00	1.22
						1" Ice	0.00	1.22
						2" Ice	0.00	1.22
						4" Ice	0.00	1.22
ATCB-B01-006(5/16")	B	No	Inside Pole	76' - 6'	3	No Ice	0.00	0.07
						1/2" Ice	0.00	0.07
						1" Ice	0.00	0.07
						2" Ice	0.00	0.07
						4" Ice	0.00	0.07
HB114-13U3M12-XXXF(1-1/4")	B	No	Inside Pole	76' - 6'	1	No Ice	0.00	0.99
						1/2" Ice	0.00	0.99
						1" Ice	0.00	0.99
						2" Ice	0.00	0.99
						4" Ice	0.00	0.99

MLE Hybrid 9Power/18Fiber RL 2(1 5/8)	B	No	Inside Pole	65' - 6'	2	No Ice	0.00	1.07
						1/2" Ice	0.00	1.07
						1" Ice	0.00	1.07
						2" Ice	0.00	1.07
						4" Ice	0.00	1.07

Feed Line/Linear Appurtenances Section Areas

Tower Section n	Tower Elevation ft	Face	A _R ft ²	A _F ft ²	C _A A _A In Face ft ²	C _A A _A Out Face ft ²	Weight K
L1	100'-47'	A	0.000	0.000	0.000	0.000	0.49
		B	0.000	0.000	0.000	0.000	0.17
		C	0.000	0.000	0.000	5.724	0.39
L2	47'-0'	A	0.000	0.000	0.000	0.000	0.38
		B	0.000	0.000	0.000	0.000	0.27
		C	0.000	0.000	0.000	4.212	0.38

Feed Line/Linear Appurtenances Section Areas - With Ice

Tower Section n	Tower Elevation ft	Face or Leg	Ice Thickness in	A _R ft ²	A _F ft ²	C _A A _A In Face ft ²	C _A A _A Out Face ft ²	Weight K
L1	100'-47'	A	0.824	0.000	0.000	0.000	0.000	0.49
		B		0.000	0.000	0.000	0.000	0.17
		C		0.000	0.000	0.000	23.201	0.52
L2	47'-0'	A	0.750	0.000	0.000	0.000	0.000	0.38
		B		0.000	0.000	0.000	0.000	0.27
		C		0.000	0.000	0.000	17.072	0.48

Feed Line Center of Pressure

Section	Elevation ft	CP _x in	CP _z in	CP _x Ice in	CP _z Ice in
L1	100'-47'	-0.1352	0.0781	-0.4735	0.2734

Section	Elevation	CP _x	CP _z	CP _x Ice	CP _z Ice
	ft	in	in	in	in
L2	47'-0'	-0.1114	0.0643	-0.4083	0.2357

Discrete Tower Loads

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C _{AA} Front	C _{AA} Side	Weight	
			Horz	Lateral						ft
AM-X-CD-16-65-00T-RET w/ Mount Pipe	A	From Leg	4.00	0'0'	0.0000	100'	No Ice	8.50	6.30	0.07
							1/2" Ice	9.15	7.48	0.14
							1" Ice	9.77	8.37	0.21
							2" Ice	11.03	10.18	0.38
							4" Ice	13.68	14.02	0.87
AM-X-CD-16-65-00T-RET w/ Mount Pipe	B	From Leg	4.00	0'0'	0.0000	100'	No Ice	8.50	6.30	0.07
							1/2" Ice	9.15	7.48	0.14
							1" Ice	9.77	8.37	0.21
							2" Ice	11.03	10.18	0.38
							4" Ice	13.68	14.02	0.87
AM-X-CD-16-65-00T-RET w/ Mount Pipe	C	From Leg	4.00	0'0'	0.0000	100'	No Ice	8.50	6.30	0.07
							1/2" Ice	9.15	7.48	0.14
							1" Ice	9.77	8.37	0.21
							2" Ice	11.03	10.18	0.38
							4" Ice	13.68	14.02	0.87
RRUS 11-700	A	From Leg	4.00	0'0'	0.0000	100'	No Ice	2.94	1.25	0.06
							1/2" Ice	3.17	1.41	0.07
							1" Ice	3.41	1.59	0.10
							2" Ice	3.91	1.96	0.15
							4" Ice	5.02	2.82	0.30
RRUS 11-700	B	From Leg	4.00	0'0'	0.0000	100'	No Ice	2.94	1.25	0.06
							1/2" Ice	3.17	1.41	0.07
							1" Ice	3.41	1.59	0.10
							2" Ice	3.91	1.96	0.15
							4" Ice	5.02	2.82	0.30
RRUS 11-700	C	From Leg	4.00	0'0'	0.0000	100'	No Ice	2.94	1.25	0.06
							1/2" Ice	3.17	1.41	0.07
							1" Ice	3.41	1.59	0.10
							2" Ice	3.91	1.96	0.15
							4" Ice	5.02	2.82	0.30
DC6-48-60-18-8F	C	From Leg	1.00	0'0'3'	0.0000	100'	No Ice	1.60	1.60	0.03
							1/2" Ice	1.81	1.81	0.05
							1" Ice	2.02	2.02	0.07
							2" Ice	2.49	2.49	0.13
							4" Ice	3.56	3.56	0.27
(2) HPA-65R-BUU-H8 w/ pipe mount	A	From Leg	4.00	0'0'	0.0000	100'	No Ice	13.60	9.65	0.11
							1/2" Ice	14.44	11.15	0.21
							1" Ice	15.28	12.68	0.32
							2" Ice	16.88	14.98	0.56
							4" Ice	20.21	19.76	1.24
(2) HPA-65R-BUU-H8 w/ pipe mount	B	From Leg	4.00	0'0'	0.0000	100'	No Ice	13.60	9.65	0.11
							1/2" Ice	14.44	11.15	0.21
							1" Ice	15.28	12.68	0.32
							2" Ice	16.88	14.98	0.56
							4" Ice	20.21	19.76	1.24
(2) HPA-65R-BUU-H8 w/	C	From Leg	4.00	0'0'	0.0000	100'	No Ice	13.60	9.65	0.11

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C _A A _{Front}	C _A A _{Side}	Weight
			Horz	Lateral					
pipe mount			0'			1/2"	14.44	11.15	0.21
			0'			Ice	15.28	12.68	0.32
						1" Ice	16.88	14.98	0.56
						2" Ice	20.21	19.76	1.24
						4" Ice			
HPA-65R-BUU-H8 w/ pipe mount	A	From Leg	4.00	0.0000	100'	No Ice	13.60	9.65	0.11
			0'			1/2"	14.44	11.15	0.21
			1'			Ice	15.28	12.68	0.32
						1" Ice	16.88	14.98	0.56
						2" Ice	20.21	19.76	1.24
HPA-65R-BUU-H8 w/ pipe mount	B	From Leg	4.00	0.0000	100'	No Ice	13.60	9.65	0.11
			0'			1/2"	14.44	11.15	0.21
			1'			Ice	15.28	12.68	0.32
						1" Ice	16.88	14.98	0.56
						2" Ice	20.21	19.76	1.24
HPA-65R-BUU-H8 w/ pipe mount	C	From Leg	4.00	0.0000	100'	No Ice	13.60	9.65	0.11
			0'			1/2"	14.44	11.15	0.21
			1'			Ice	15.28	12.68	0.32
						1" Ice	16.88	14.98	0.56
						2" Ice	20.21	19.76	1.24
RRUS-11 1900 MHz	A	From Leg	4.00	0.0000	100'	No Ice	2.94	1.19	0.04
			0'			1/2"	3.17	1.35	0.06
			0'			Ice	3.41	1.52	0.09
						1" Ice	3.91	1.89	0.14
						2" Ice	5.02	2.72	0.29
RRUS-11 1900 MHz	B	From Leg	4.00	0.0000	100'	No Ice	2.94	1.19	0.04
			0'			1/2"	3.17	1.35	0.06
			0'			Ice	3.41	1.52	0.09
						1" Ice	3.91	1.89	0.14
						2" Ice	5.02	2.72	0.29
RRUS-11 1900 MHz	C	From Leg	4.00	0.0000	100'	No Ice	2.94	1.19	0.04
			0'			1/2"	3.17	1.35	0.06
			0'			Ice	3.41	1.52	0.09
						1" Ice	3.91	1.89	0.14
						2" Ice	5.02	2.72	0.29
RRUS A2 Module	A	From Leg	4.00	0.0000	100'	No Ice	1.87	0.42	0.02
			0'			1/2"	2.05	0.53	0.03
			0'			Ice	2.24	0.65	0.04
						1" Ice	2.66	0.91	0.08
						2" Ice	3.58	1.54	0.18
RRUS A2 Module	B	From Leg	4.00	0.0000	100'	No Ice	1.87	0.42	0.02
			0'			1/2"	2.05	0.53	0.03
			0'			Ice	2.24	0.65	0.04
						1" Ice	2.66	0.91	0.08
						2" Ice	3.58	1.54	0.18
RRUS A2 Module	C	From Leg	4.00	0.0000	100'	No Ice	1.87	0.42	0.02
			0'			1/2"	2.05	0.53	0.03
			0'			Ice	2.24	0.65	0.04
						1" Ice	2.66	0.91	0.08
						2" Ice	3.58	1.54	0.18
DC6-48-60-18-8F	C	From Leg	1.00	0.0000	100'	No Ice	1.60	1.60	0.03
			0'			1/2"	1.81	1.81	0.05
			0'			Ice	2.02	2.02	0.07
						1" Ice	2.49	2.49	0.13
						2" Ice	3.56	3.56	0.27

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C _{AA} _{Front}	C _{AA} _{Side}	Weight
			Horz	Lateral					
			ft	ft	°	ft	ft ²	ft ²	K
MTC 3607	C	None			0.0000	100'	No Ice 51.70 1/2" 62.70 Ice 73.70 1" Ice 95.70 2" Ice 139.70 4" Ice 139.70	51.70 62.70 73.70 95.70 139.70 139.70	2.26 2.94 3.61 4.95 7.65

AIR 21 B4A B2P w/ pipe mount	A	From Leg	4.00 0' 4'		0.0000	86'	No Ice 6.90 1/2" 7.46 Ice 8.00 1" Ice 9.10 2" Ice 11.44 4" Ice 11.44	5.74 6.64 7.44 9.09 12.59 12.59	0.12 0.18 0.24 0.40 0.83
AIR 21 B4A B2P w/ pipe mount	B	From Leg	4.00 0' 4'		0.0000	86'	No Ice 6.90 1/2" 7.46 Ice 8.00 1" Ice 9.10 2" Ice 11.44 4" Ice 11.44	5.74 6.64 7.44 9.09 12.59 12.59	0.12 0.18 0.24 0.40 0.83
AIR 21 B4A B2P w/ pipe mount	C	From Leg	4.00 0' 4'		0.0000	86'	No Ice 6.90 1/2" 7.46 Ice 8.00 1" Ice 9.10 2" Ice 11.44 4" Ice 11.44	5.74 6.64 7.44 9.09 12.59 12.59	0.12 0.18 0.24 0.40 0.83
AIR 21 B2A B4P w/ pipe mount	A	From Leg	4.00 0' 4'		0.0000	86'	No Ice 6.90 1/2" 7.46 Ice 8.00 1" Ice 9.10 2" Ice 11.44 4" Ice 11.44	5.74 6.64 7.44 9.09 12.59 12.59	0.12 0.18 0.24 0.40 0.83
AIR 21 B2A B4P w/ pipe mount	B	From Leg	4.00 0' 4'		0.0000	86'	No Ice 6.90 1/2" 7.46 Ice 8.00 1" Ice 9.10 2" Ice 11.44 4" Ice 11.44	5.74 6.64 7.44 9.09 12.59 12.59	0.12 0.18 0.24 0.40 0.83
AIR 21 B2A B4P w/ pipe mount	C	From Leg	4.00 0' 4'		0.0000	86'	No Ice 6.90 1/2" 7.46 Ice 8.00 1" Ice 9.10 2" Ice 11.44 4" Ice 11.44	5.74 6.64 7.44 9.09 12.59 12.59	0.12 0.18 0.24 0.40 0.83
KRY 112 71/2	A	From Leg	4.00 0' 4'		0.0000	86'	No Ice 0.68 1/2" 0.80 Ice 0.93 1" Ice 1.22 2" Ice 1.90 4" Ice 1.90	0.45 0.56 0.68 0.94 1.57 1.57	0.01 0.02 0.03 0.04 0.11
KRY 112 71/2	B	From Leg	4.00 0' 4'		0.0000	86'	No Ice 0.68 1/2" 0.80 Ice 0.93 1" Ice 1.22 2" Ice 1.90 4" Ice 1.90	0.45 0.56 0.68 0.94 1.57 1.57	0.01 0.02 0.03 0.04 0.11
KRY 112 71/2	C	From Leg	4.00 0' 4'		0.0000	86'	No Ice 0.68 1/2" 0.80 Ice 0.93 1" Ice 1.22 2" Ice 1.90 4" Ice 1.90	0.45 0.56 0.68 0.94 1.57 1.57	0.01 0.02 0.03 0.04 0.11
6' x 2" Mount Pipe	B	From Leg	4.00 -6' 0'		0.0000	86'	No Ice 1.43 1/2" 1.92 Ice 2.29 1" Ice 3.06	1.43 1.92 2.29 3.06	0.02 0.03 0.05 0.09

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment °	Placement ft	C _{AA} Front ft ²	C _{AA} Side ft ²	Weight K	
			Horz ft	Lateral ft						Vert ft
Platform Mount [LP 305-1]	C	None			0.0000	86'	2" Ice	4.70	4.70	0.23
							4" Ice			
							No Ice	18.01	18.01	1.12
							1/2" Ice	23.33	23.33	1.35
							1" Ice	28.65	28.65	1.58
							2" Ice	39.29	39.29	2.05
***** LNX-6515DS-VTM w/ pipe mount	A	From Leg	4.00 0' 4'		0.0000	86'	No Ice	11.72	10.28	0.11
							1/2" Ice	12.44	11.81	0.20
							1" Ice	13.15	13.16	0.31
							2" Ice	14.61	15.49	0.55
							4" Ice	17.87	20.37	1.20
							LNX-6515DS-VTM w/ pipe mount	B	From Leg	4.00 0' 4'
1/2" Ice	12.44	11.81	0.20							
1" Ice	13.15	13.16	0.31							
2" Ice	14.61	15.49	0.55							
4" Ice	17.87	20.37	1.20							
LNX-6515DS-VTM w/ pipe mount	C	From Leg	4.00 0' 4'		0.0000	86'				
							1/2" Ice	12.44	11.81	0.20
							1" Ice	13.15	13.16	0.31
							2" Ice	14.61	15.49	0.55
							4" Ice	17.87	20.37	1.20
							RRUS 11 B12	A	From Leg	4.00 0' 4'
1/2" Ice	3.55	1.54	0.07							
1" Ice	3.80	1.73	0.10							
2" Ice	4.33	2.13	0.15							
4" Ice	5.50	3.04	0.31							
RRUS 11 B12	B	From Leg	4.00 0' 4'		0.0000	86'				
							1/2" Ice	3.55	1.54	0.07
							1" Ice	3.80	1.73	0.10
							2" Ice	4.33	2.13	0.15
							4" Ice	5.50	3.04	0.31
							RRUS 11 B12	C	From Leg	4.00 0' 4'
1/2" Ice	3.55	1.54	0.07							
1" Ice	3.80	1.73	0.10							
2" Ice	4.33	2.13	0.15							
4" Ice	5.50	3.04	0.31							
***** TME-800MHZ RRH	A	From Leg	2.00 0' 0'		0.0000	78'				
							1/2" Ice	2.71	2.27	0.07
							1" Ice	2.93	2.48	0.10
							2" Ice	3.41	2.93	0.16
							4" Ice	4.46	3.93	0.32
							TME-800MHZ RRH	B	From Leg	2.00 0' 0'
1/2" Ice	2.71	2.27	0.07							
1" Ice	2.93	2.48	0.10							
2" Ice	3.41	2.93	0.16							
4" Ice	4.46	3.93	0.32							
TME-800MHZ RRH	C	From Leg	2.00 0' 0'		0.0000	78'				
							1/2" Ice	2.71	2.27	0.07
							1" Ice	2.93	2.48	0.10
							2" Ice	3.41	2.93	0.16
							4" Ice	4.46	3.93	0.32
							1900MHz RRH	A	From Leg	2.00

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C _{AA} _{Front}	C _{AA} _{Side}	Weight
			Horz	Lateral					
			0'			1/2"	3.14	4.06	0.08
			0'			Ice	3.39	4.34	0.11
						1" Ice	3.91	4.91	0.19
						2" Ice	5.05	6.15	0.41
						4" Ice			
1900MHz RRH	B	From Leg	2.00	0.0000	78'	No Ice	2.91	3.80	0.04
			0'			1/2"	3.14	4.06	0.08
			0'			Ice	3.39	4.34	0.11
						1" Ice	3.91	4.91	0.19
						2" Ice	5.05	6.15	0.41
						4" Ice			
1900MHz RRH	C	From Leg	2.00	0.0000	78'	No Ice	2.91	3.80	0.04
			0'			1/2"	3.14	4.06	0.08
			0'			Ice	3.39	4.34	0.11
						1" Ice	3.91	4.91	0.19
						2" Ice	5.05	6.15	0.41
						4" Ice			
800 EXTERNAL NOTCH FILTER	A	From Leg	2.00	0.0000	78'	No Ice	0.77	0.37	0.01
			0'			1/2"	0.89	0.46	0.02
			0'			Ice	1.02	0.56	0.02
						1" Ice	1.30	0.79	0.04
						2" Ice	1.97	1.34	0.11
						4" Ice			
800 EXTERNAL NOTCH FILTER	B	From Leg	2.00	0.0000	78'	No Ice	0.77	0.37	0.01
			0'			1/2"	0.89	0.46	0.02
			0'			Ice	1.02	0.56	0.02
						1" Ice	1.30	0.79	0.04
						2" Ice	1.97	1.34	0.11
						4" Ice			
800 EXTERNAL NOTCH FILTER	C	From Leg	2.00	0.0000	78'	No Ice	0.77	0.37	0.01
			0'			1/2"	0.89	0.46	0.02
			0'			Ice	1.02	0.56	0.02
						1" Ice	1.30	0.79	0.04
						2" Ice	1.97	1.34	0.11
						4" Ice			
6' x 2" Mount Pipe	A	From Leg	2.00	0.0000	78'	No Ice	1.43	1.43	0.02
			0'			1/2"	1.92	1.92	0.03
			0'			Ice	2.29	2.29	0.05
						1" Ice	3.06	3.06	0.09
						2" Ice	4.70	4.70	0.23
						4" Ice			
6' x 2" Mount Pipe	B	From Leg	2.00	0.0000	78'	No Ice	1.43	1.43	0.02
			0'			1/2"	1.92	1.92	0.03
			0'			Ice	2.29	2.29	0.05
						1" Ice	3.06	3.06	0.09
						2" Ice	4.70	4.70	0.23
						4" Ice			
6' x 2" Mount Pipe	C	From Leg	2.00	0.0000	78'	No Ice	1.43	1.43	0.02
			0'			1/2"	1.92	1.92	0.03
			0'			Ice	2.29	2.29	0.05
						1" Ice	3.06	3.06	0.09
						2" Ice	4.70	4.70	0.23
						4" Ice			
Side Arm Mount [SO 102-1]	A	From Leg	0.50	0.0000	78'	No Ice	1.50	1.50	0.03
			0'			1/2"	1.74	1.75	0.04
			0'			Ice	1.98	2.00	0.04
						1" Ice	2.46	2.50	0.07
						2" Ice	3.42	3.50	0.11
						4" Ice			
Side Arm Mount [SO 102-1]	B	From Leg	0.50	0.0000	78'	No Ice	1.50	1.50	0.03
			0'			1/2"	1.74	1.75	0.04
			0'			Ice	1.98	2.00	0.04
						1" Ice	2.46	2.50	0.07
						2" Ice	3.42	3.50	0.11
						4" Ice			

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C _{AA} _{Front}	C _{AA} _{Side}	Weight	
			Horz	Lateral						ft
Side Arm Mount [SO 102-1]	C	From Leg	0.50	0'0'	0.0000	78'	No Ice	1.50	1.50	0.03
							1/2" Ice	1.74	1.75	0.04
							1" Ice	1.98	2.00	0.04
							2" Ice	2.46	2.50	0.07
							4" Ice	3.42	3.50	0.11
*** APXVSPP18-C-A20 w/ Mount Pipe	A	From Leg	4.00	0'3'	0.0000	76'	No Ice	8.50	6.95	0.08
							1/2" Ice	9.15	8.13	0.15
							1" Ice	9.77	9.02	0.23
							2" Ice	11.03	10.84	0.41
							4" Ice	13.68	14.85	0.91
APXVSPP18-C-A20 w/ Mount Pipe	B	From Leg	4.00	0'3'	0.0000	76'	No Ice	8.50	6.95	0.08
							1/2" Ice	9.15	8.13	0.15
							1" Ice	9.77	9.02	0.23
							2" Ice	11.03	10.84	0.41
							4" Ice	13.68	14.85	0.91
APXVSPP18-C-A20 w/ Mount Pipe	C	From Leg	4.00	0'3'	0.0000	76'	No Ice	8.50	6.95	0.08
							1/2" Ice	9.15	8.13	0.15
							1" Ice	9.77	9.02	0.23
							2" Ice	11.03	10.84	0.41
							4" Ice	13.68	14.85	0.91
Platform Mount [LP 303-1]	C	None			0.0000	76'	No Ice	14.66	14.66	1.25
							1/2" Ice	18.87	18.87	1.48
							1" Ice	23.08	23.08	1.71
							2" Ice	31.50	31.50	2.18
							4" Ice	48.34	48.34	3.10
*** APXVTM14-C-120 w/ Mount Pipe	A	From Leg	4.00	0'3'	0.0000	76'	No Ice	7.13	4.96	0.08
							1/2" Ice	7.66	5.75	0.13
							1" Ice	8.18	6.47	0.19
							2" Ice	9.26	8.01	0.34
							4" Ice	11.53	11.41	0.75
APXVTM14-C-120 w/ Mount Pipe	B	From Leg	4.00	0'3'	0.0000	76'	No Ice	7.13	4.96	0.08
							1/2" Ice	7.66	5.75	0.13
							1" Ice	8.18	6.47	0.19
							2" Ice	9.26	8.01	0.34
							4" Ice	11.53	11.41	0.75
APXVTM14-C-120 w/ Mount Pipe	C	From Leg	4.00	0'3'	0.0000	76'	No Ice	7.13	4.96	0.08
							1/2" Ice	7.66	5.75	0.13
							1" Ice	8.18	6.47	0.19
							2" Ice	9.26	8.01	0.34
							4" Ice	11.53	11.41	0.75
TD-RRH8x20-25	A	From Leg	4.00	0'3'	0.0000	76'	No Ice	4.32	1.41	0.07
							1/2" Ice	4.60	1.61	0.09
							1" Ice	4.89	1.83	0.12
							2" Ice	5.50	2.28	0.18
							4" Ice	6.82	3.30	0.36
TD-RRH8x20-25	B	From Leg	4.00	0'3'	0.0000	76'	No Ice	4.32	1.41	0.07
							1/2" Ice	4.60	1.61	0.09
							1" Ice	4.89	1.83	0.12
							2" Ice	5.50	2.28	0.18
							4" Ice	6.82	3.30	0.36
TD-RRH8x20-25	C	From Leg	4.00	0'3'	0.0000	76'	No Ice	4.32	1.41	0.07
							1/2" Ice	4.60	1.61	0.09
							1" Ice	4.89	1.83	0.12

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustment	Placement	C _{AA} _{Front}	C _{AA} _{Side}	Weight	
			Horz	Lateral						Vert
			ft	ft	°	ft	ft ²	ft ²	K	
						1" Ice	5.50	2.28	0.18	
						2" Ice	6.82	3.30	0.36	
						4" Ice				

(2) BXA-171063/12CF w/ Mount Pipe	A	From Leg	4.00		0.0000	65'	No Ice	5.03	5.29	0.04
			0'				1/2"	5.58	6.46	0.09
			0'				Ice	6.10	7.35	0.14
							1" Ice	7.17	9.15	0.27
							2" Ice	9.44	12.95	0.68
							4" Ice			
(2) BXA-171063/12CF w/ Mount Pipe	B	From Leg	4.00		0.0000	65'	No Ice	5.03	5.29	0.04
			0'				1/2"	5.58	6.46	0.09
			0'				Ice	6.10	7.35	0.14
							1" Ice	7.17	9.15	0.27
							2" Ice	9.44	12.95	0.68
							4" Ice			
(2) BXA-171063/12CF w/ Mount Pipe	C	From Leg	4.00		0.0000	65'	No Ice	5.03	5.29	0.04
			0'				1/2"	5.58	6.46	0.09
			0'				Ice	6.10	7.35	0.14
							1" Ice	7.17	9.15	0.27
							2" Ice	9.44	12.95	0.68
							4" Ice			
(2) BXA-70063/6CF w/ Mount Pipe	A	From Leg	4.00		0.0000	65'	No Ice	7.98	5.41	0.04
			0'				1/2"	8.62	6.56	0.10
			0'				Ice	9.23	7.42	0.17
							1" Ice	10.47	9.20	0.33
							2" Ice	13.08	12.95	0.79
							4" Ice			
(2) BXA-70063/6CF w/ Mount Pipe	B	From Leg	4.00		0.0000	65'	No Ice	7.98	5.41	0.04
			0'				1/2"	8.62	6.56	0.10
			0'				Ice	9.23	7.42	0.17
							1" Ice	10.47	9.20	0.33
							2" Ice	13.08	12.95	0.79
							4" Ice			
(2) BXA-70063/6CF w/ Mount Pipe	C	From Leg	4.00		0.0000	65'	No Ice	7.98	5.41	0.04
			0'				1/2"	8.62	6.56	0.10
			0'				Ice	9.23	7.42	0.17
							1" Ice	10.47	9.20	0.33
							2" Ice	13.08	12.95	0.79
							4" Ice			
RRH2x40 700	A	From Leg	4.00		0.0000	65'	No Ice	2.29	1.21	0.05
			0'				1/2"	2.49	1.36	0.07
			0'				Ice	2.70	1.53	0.09
							1" Ice	3.15	1.89	0.13
							2" Ice	4.16	2.71	0.27
							4" Ice			
RRH2x40 700	B	From Leg	4.00		0.0000	65'	No Ice	2.29	1.21	0.05
			0'				1/2"	2.49	1.36	0.07
			0'				Ice	2.70	1.53	0.09
							1" Ice	3.15	1.89	0.13
							2" Ice	4.16	2.71	0.27
							4" Ice			
RRH2x40 700	C	From Leg	4.00		0.0000	65'	No Ice	2.29	1.21	0.05
			0'				1/2"	2.49	1.36	0.07
			0'				Ice	2.70	1.53	0.09
							1" Ice	3.15	1.89	0.13
							2" Ice	4.16	2.71	0.27
							4" Ice			
RRH2X40-AWS	A	From Leg	4.00		0.0000	65'	No Ice	2.52	1.59	0.05
			0'				1/2"	2.75	1.80	0.07
			0'				Ice	2.99	2.01	0.09
							1" Ice	3.50	2.46	0.14
							2" Ice	4.61	3.48	0.28
							4" Ice			
RRH2X40-AWS	B	From Leg	4.00		0.0000	65'	No Ice	2.52	1.59	0.05

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustment °	Placement ft	C _{AA} Front ft ²	C _{AA} Side ft ²	Weight K	
			0'		1/2"	2.75	1.80	0.07	
			0'		Ice	2.99	2.01	0.09	
					1" Ice	3.50	2.46	0.14	
					2" Ice	4.61	3.48	0.28	
					4" Ice				
RRH2X40-AWS	C	From Leg	4.00	0.0000	65'	No Ice	2.52	1.59	0.05
			0'		1/2"	2.75	1.80	0.07	
			0'		Ice	2.99	2.01	0.09	
					1" Ice	3.50	2.46	0.14	
					2" Ice	4.61	3.48	0.28	
					4" Ice				
DB-T1-6Z-8AB-0Z	A	From Leg	4.00	0.0000	65'	No Ice	5.60	2.33	0.04
			0'		1/2"	5.92	2.56	0.08	
			0'		Ice	6.24	2.79	0.12	
					1" Ice	6.91	3.28	0.21	
					2" Ice	8.37	4.37	0.45	
					4" Ice				
DB-T1-6Z-8AB-0Z	C	From Leg	4.00	0.0000	65'	No Ice	5.60	2.33	0.04
			0'		1/2"	5.92	2.56	0.08	
			0'		Ice	6.24	2.79	0.12	
					1" Ice	6.91	3.28	0.21	
					2" Ice	8.37	4.37	0.45	
					4" Ice				
Platform Mount [LP 303-1]	C	None		0.0000	65'	No Ice	14.66	14.66	1.25
					1/2"	18.87	18.87	1.48	
					Ice	23.08	23.08	1.71	
					1" Ice	31.50	31.50	2.18	
					2" Ice	48.34	48.34	3.10	
					4" Ice				

Dishes

Description	Face or Leg	Dish Type	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustment °	3 dB Beam Width °	Elevation ft	Outside Diameter ft	Aperture Area ft ²	Weight K	
VHLP1-23	B	Paraboloid w/o Radome	From Leg	4.00	20.0000		86'	1.27	No Ice	1.28	0.01
				-6'					1/2" Ice	1.45	0.02
				0'					1" Ice	1.62	0.03
									2" Ice	1.97	0.04
									4" Ice	2.66	0.07
VHLP2-13	B	Paraboloid w/o Radome	From Leg	4.00	20.0000		86'	2.17	No Ice	3.72	0.03
				-6'					1/2" Ice	4.01	0.05
				4'					1" Ice	4.30	0.07
									2" Ice	4.88	0.11
									4" Ice	6.04	0.19

Load Combinations

Comb. No.	Description
1	Dead Only
2	Dead+Wind 0 deg - No Ice
3	Dead+Wind 30 deg - No Ice
4	Dead+Wind 60 deg - No Ice
5	Dead+Wind 90 deg - No Ice
6	Dead+Wind 120 deg - No Ice

Comb. No.	Description
7	Dead+Wind 150 deg - No Ice
8	Dead+Wind 180 deg - No Ice
9	Dead+Wind 210 deg - No Ice
10	Dead+Wind 240 deg - No Ice
11	Dead+Wind 270 deg - No Ice
12	Dead+Wind 300 deg - No Ice
13	Dead+Wind 330 deg - No Ice
14	Dead+Ice+Temp
15	Dead+Wind 0 deg+Ice+Temp
16	Dead+Wind 30 deg+Ice+Temp
17	Dead+Wind 60 deg+Ice+Temp
18	Dead+Wind 90 deg+Ice+Temp
19	Dead+Wind 120 deg+Ice+Temp
20	Dead+Wind 150 deg+Ice+Temp
21	Dead+Wind 180 deg+Ice+Temp
22	Dead+Wind 210 deg+Ice+Temp
23	Dead+Wind 240 deg+Ice+Temp
24	Dead+Wind 270 deg+Ice+Temp
25	Dead+Wind 300 deg+Ice+Temp
26	Dead+Wind 330 deg+Ice+Temp
27	Dead+Wind 0 deg - Service
28	Dead+Wind 30 deg - Service
29	Dead+Wind 60 deg - Service
30	Dead+Wind 90 deg - Service
31	Dead+Wind 120 deg - Service
32	Dead+Wind 150 deg - Service
33	Dead+Wind 180 deg - Service
34	Dead+Wind 210 deg - Service
35	Dead+Wind 240 deg - Service
36	Dead+Wind 270 deg - Service
37	Dead+Wind 300 deg - Service
38	Dead+Wind 330 deg - Service

Maximum Member Forces

Section No.	Elevation ft	Component Type	Condition	Gov. Load Comb.	Force K	Major Axis Moment kip-ft	Minor Axis Moment kip-ft
L1	100 - 47	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	14	-27.35	0.01	0.33
			Max. Mx	11	-16.26	834.75	8.71
			Max. My	2	-16.25	7.08	836.35
			Max. Vy	11	-26.21	834.75	8.71
			Max. Vx	2	-26.30	7.08	836.35
			Max. Torque	11			-2.76
L2	47 - 0	Pole	Max Tension	1	0.00	0.00	0.00
			Max. Compression	14	-41.55	0.33	0.15
			Max. Mx	11	-28.58	2381.75	19.33
			Max. My	2	-28.58	15.67	2387.41
			Max. Vy	11	-32.20	2381.75	19.33
			Max. Vx	2	-32.28	15.67	2387.41
			Max. Torque	11			-2.74

Maximum Reactions

Location	Condition	Gov. Load Comb.	Vertical K	Horizontal, X K	Horizontal, Z K
Pole	Max. Vert	26	41.55	3.78	6.55
	Max. H _x	11	28.60	32.18	0.20
	Max. H _z	2	28.60	0.16	32.26
	Max. M _x	2	2387.41	0.16	32.26
	Max. M _z	5	2372.58	-32.08	0.04

Location	Condition	Gov. Load Comb.	Vertical K	Horizontal, X K	Horizontal, Z K
	Max. Torsion	7	1.34	-16.03	-27.86
	Min. Vert	1	28.60	0.00	0.00
	Min. H _x	5	28.60	-32.08	0.04
	Min. H _z	8	28.60	0.05	-32.16
	Min. M _x	8	-2377.94	0.05	-32.16
	Min. M _z	11	-2381.75	32.18	0.20
	Min. Torsion	11	-2.71	32.18	0.20

Tower Mast Reaction Summary

Load Combination	Vertical K	Shear _x K	Shear _z K	Overturning Moment, M _x kip-ft	Overturning Moment, M _z kip-ft	Torque kip-ft
Dead Only	28.60	0.00	0.00	-0.05	0.11	0.00
Dead+Wind 0 deg - No Ice	28.60	-0.16	-32.26	-2387.41	15.67	2.08
Dead+Wind 30 deg - No Ice	28.60	15.91	-28.02	-2074.57	-1173.18	1.98
Dead+Wind 60 deg - No Ice	28.60	27.80	-16.04	-1184.13	-2056.09	-0.67
Dead+Wind 90 deg - No Ice	28.60	32.08	-0.04	-2.50	-2372.58	-0.55
Dead+Wind 120 deg - No Ice	28.60	27.80	16.05	1188.01	-2056.87	-1.10
Dead+Wind 150 deg - No Ice	28.60	16.03	27.86	2061.12	-1186.30	-1.34
Dead+Wind 180 deg - No Ice	28.60	-0.05	32.16	2377.94	3.12	-0.85
Dead+Wind 210 deg - No Ice	28.60	-16.02	27.87	2060.94	1183.71	-0.62
Dead+Wind 240 deg - No Ice	28.60	-27.85	15.98	1178.83	2060.58	1.24
Dead+Wind 270 deg - No Ice	28.60	-32.18	-0.20	-19.33	2381.75	2.71
Dead+Wind 300 deg - No Ice	28.60	-27.83	-16.21	-1202.00	2060.34	2.40
Dead+Wind 330 deg - No Ice	28.60	-16.14	-27.93	-2067.43	1196.42	2.11
Dead+Ice+Temp	41.55	0.00	0.00	-0.15	0.33	0.00
Dead+Wind 0 deg+Ice+Temp	41.55	-0.04	-7.56	-571.71	3.96	0.43
Dead+Wind 30 deg+Ice+Temp	41.55	3.73	-6.57	-496.69	-280.77	0.43
Dead+Wind 60 deg+Ice+Temp	41.55	6.52	-3.76	-283.68	-492.10	-0.14
Dead+Wind 90 deg+Ice+Temp	41.55	7.52	-0.01	-0.64	-567.96	-0.09
Dead+Wind 120 deg+Ice+Temp	41.55	6.52	3.76	284.40	-492.36	-0.20
Dead+Wind 150 deg+Ice+Temp	41.55	3.76	6.53	493.41	-283.90	-0.25
Dead+Wind 180 deg+Ice+Temp	41.55	-0.01	7.54	569.26	0.94	-0.15
Dead+Wind 210 deg+Ice+Temp	41.55	-3.76	6.53	493.29	283.78	-0.12
Dead+Wind 240 deg+Ice+Temp	41.55	-6.53	3.74	282.17	493.74	0.27
Dead+Wind 270 deg+Ice+Temp	41.55	-7.54	-0.05	-4.64	570.67	0.58
Dead+Wind 300 deg+Ice+Temp	41.55	-6.53	-3.80	-287.89	493.76	0.50
Dead+Wind 330 deg+Ice+Temp	41.55	-3.78	-6.55	-495.14	286.82	0.43
Dead+Wind 0 deg - Service	28.60	-0.05	-11.16	-826.37	5.50	0.72
Dead+Wind 30 deg - Service	28.60	5.50	-9.70	-718.09	-406.00	0.69
Dead+Wind 60 deg - Service	28.60	9.62	-5.55	-409.89	-711.59	-0.23
Dead+Wind 90 deg - Service	28.60	11.10	-0.01	-0.90	-821.13	-0.19
Dead+Wind 120 deg - Service	28.60	9.62	5.56	411.16	-711.86	-0.38
Dead+Wind 150 deg - Service	28.60	5.55	9.64	713.37	-410.53	-0.46
Dead+Wind 180 deg - Service	28.60	-0.02	11.13	823.03	1.15	-0.29
Dead+Wind 210 deg - Service	28.60	-5.54	9.64	713.31	409.78	-0.21
Dead+Wind 240 deg - Service	28.60	-9.64	5.53	407.99	713.29	0.43

Load Combination	Vertical	Shear _x	Shear _z	Overturning Moment, M _x	Overturning Moment, M _z	Torque
	K	K	K	kip-ft	kip-ft	kip-ft
Dead+Wind 270 deg - Service	28.60	-11.13	-0.07	-6.72	824.45	0.94
Dead+Wind 300 deg - Service	28.60	-9.63	-5.61	-416.08	713.20	0.83
Dead+Wind 330 deg - Service	28.60	-5.58	-9.66	-715.62	414.18	0.73

Solution Summary

Load Comb.	Sum of Applied Forces			Sum of Reactions			% Error
	PX K	PY K	PZ K	PX K	PY K	PZ K	
1	0.00	-28.60	0.00	0.00	28.60	0.00	0.000%
2	-0.16	-28.60	-32.26	0.16	28.60	32.26	0.000%
3	15.91	-28.60	-28.02	-15.91	28.60	28.02	0.000%
4	27.80	-28.60	-16.04	-27.80	28.60	16.04	0.000%
5	32.08	-28.60	-0.04	-32.08	28.60	0.04	0.000%
6	27.80	-28.60	16.05	-27.80	28.60	-16.05	0.000%
7	16.03	-28.60	27.86	-16.03	28.60	-27.86	0.000%
8	-0.05	-28.60	32.16	0.05	28.60	-32.16	0.000%
9	-16.02	-28.60	27.87	16.02	28.60	-27.87	0.000%
10	-27.85	-28.60	15.98	27.85	28.60	-15.98	0.000%
11	-32.18	-28.60	-0.20	32.18	28.60	0.20	0.000%
12	-27.83	-28.60	-16.21	27.83	28.60	16.21	0.000%
13	-16.14	-28.60	-27.93	16.14	28.60	27.93	0.000%
14	0.00	-41.55	0.00	0.00	41.55	0.00	0.000%
15	-0.04	-41.55	-7.56	0.04	41.55	7.56	0.000%
16	3.73	-41.55	-6.57	-3.73	41.55	6.57	0.000%
17	6.52	-41.55	-3.76	-6.52	41.55	3.76	0.000%
18	7.52	-41.55	-0.01	-7.52	41.55	0.01	0.000%
19	6.52	-41.55	3.76	-6.52	41.55	-3.76	0.000%
20	3.76	-41.55	6.53	-3.76	41.55	-6.53	0.000%
21	-0.01	-41.55	7.54	0.01	41.55	-7.54	0.000%
22	-3.76	-41.55	6.53	3.76	41.55	-6.53	0.000%
23	-6.53	-41.55	3.74	6.53	41.55	-3.74	0.000%
24	-7.54	-41.55	-0.05	7.54	41.55	0.05	0.000%
25	-6.53	-41.55	-3.80	6.53	41.55	3.80	0.000%
26	-3.78	-41.55	-6.55	3.78	41.55	6.55	0.000%
27	-0.05	-28.60	-11.16	0.05	28.60	11.16	0.000%
28	5.50	-28.60	-9.70	-5.50	28.60	9.70	0.000%
29	9.62	-28.60	-5.55	-9.62	28.60	5.55	0.000%
30	11.10	-28.60	-0.01	-11.10	28.60	0.01	0.000%
31	9.62	-28.60	5.56	-9.62	28.60	-5.56	0.000%
32	5.55	-28.60	9.64	-5.55	28.60	-9.64	0.000%
33	-0.02	-28.60	11.13	0.02	28.60	-11.13	0.000%
34	-5.54	-28.60	9.64	5.54	28.60	-9.64	0.000%
35	-9.64	-28.60	5.53	9.64	28.60	-5.53	0.000%
36	-11.13	-28.60	-0.07	11.13	28.60	0.07	0.000%
37	-9.63	-28.60	-5.61	9.63	28.60	5.61	0.000%
38	-5.58	-28.60	-9.66	5.58	28.60	9.66	0.000%

Non-Linear Convergence Results

Load Combination	Converged?	Number of Cycles	Displacement Tolerance	Force Tolerance
1	Yes	4	0.00000001	0.00000001
2	Yes	4	0.00000001	0.00005200
3	Yes	4	0.00000001	0.00034509
4	Yes	4	0.00000001	0.00032011
5	Yes	4	0.00000001	0.00001532
6	Yes	4	0.00000001	0.00030109
7	Yes	4	0.00000001	0.00033539
8	Yes	4	0.00000001	0.00002577

9	Yes	4	0.0000001	0.00030360
10	Yes	4	0.0000001	0.00029812
11	Yes	4	0.0000001	0.00007474
12	Yes	4	0.0000001	0.00035517
13	Yes	4	0.0000001	0.00029493
14	Yes	4	0.0000001	0.00000001
15	Yes	4	0.0000001	0.00016483
16	Yes	4	0.0000001	0.00017443
17	Yes	4	0.0000001	0.00017333
18	Yes	4	0.0000001	0.00016359
19	Yes	4	0.0000001	0.00017337
20	Yes	4	0.0000001	0.00017388
21	Yes	4	0.0000001	0.00016374
22	Yes	4	0.0000001	0.00017316
23	Yes	4	0.0000001	0.00017296
24	Yes	4	0.0000001	0.00016453
25	Yes	4	0.0000001	0.00017514
26	Yes	4	0.0000001	0.00017461
27	Yes	4	0.0000001	0.00001102
28	Yes	4	0.0000001	0.00002939
29	Yes	4	0.0000001	0.00002430
30	Yes	4	0.0000001	0.00000001
31	Yes	4	0.0000001	0.00002116
32	Yes	4	0.0000001	0.00002708
33	Yes	4	0.0000001	0.00000582
34	Yes	4	0.0000001	0.00002153
35	Yes	4	0.0000001	0.00002090
36	Yes	4	0.0000001	0.00001376
37	Yes	4	0.0000001	0.00003073
38	Yes	4	0.0000001	0.00002094

Maximum Tower Deflections - Service Wind

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L1	100 - 47	10.826	38	0.8536	0.0035
L2	53 - 0	3.389	38	0.5695	0.0013

Critical Deflections and Radius of Curvature - Service Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
100'	AM-X-CD-16-65-00T-RET w/ Mount Pipe	38	10.826	0.8536	0.0035	39881
90'	VHLP2-13	38	9.032	0.8037	0.0030	19941
86'	VHLP1-23	38	8.328	0.7830	0.0028	14243
78'	TME-800MHZ RRH	38	6.964	0.7396	0.0024	9064
76'	APXVSPP18-C-A20 w/ Mount Pipe	38	6.635	0.7281	0.0023	8308
65'	(2) BXA-171063/12CF w/ Mount Pipe	38	4.942	0.6592	0.0018	5697

Maximum Tower Deflections - Design Wind

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
L1	100 - 47	31.261	13	2.4655	0.0102
L2	53 - 0	9.787	13	1.6448	0.0038

Critical Deflections and Radius of Curvature - Design Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
100'	AM-X-CD-16-65-00T-RET w/ Mount Pipe	13	31.261	2.4655	0.0102	13850
90'	VHLP2-13	13	26.082	2.3214	0.0087	6925
86'	VHLP1-23	13	24.049	2.2618	0.0081	4946
78'	TME-800MHZ RRH	13	20.111	2.1362	0.0069	3146
76'	APXVSP18-C-A20 w/ Mount Pipe	13	19.161	2.1031	0.0067	2884
65'	(2) BXA-171063/12CF w/ Mount Pipe	13	14.273	1.9041	0.0052	1977

Compression Checks

Pole Design Data

Section No.	Elevation ft	Size	L ft	L _u ft	Kl/r	F _a ksi	A in ²	Actual P K	Allow. P _a K	Ratio P P _a
L1	100 - 47 (1)	TP40.72x28x0.3125	53'	0'	0.0	39.000	38.8457	-16.25	1514.98	0.011
L2	47 - 0 (2)	TP51.37x38.655x0.375	53'	0'	0.0	39.000	61.0028	-28.58	2379.11	0.012

Pole Bending Design Data

Section No.	Elevation ft	Size	Actual M _x kip-ft	Actual f _{bx} ksi	Allow. F _{bx} ksi	Ratio $\frac{f_{bx}}{F_{bx}}$	Actual M _y kip-ft	Actual f _{by} ksi	Allow. F _{by} ksi	Ratio $\frac{f_{by}}{F_{by}}$
L1	100 - 47 (1)	TP40.72x28x0.3125	837.69	27.024	39.000	0.693	0.00	0.000	39.000	0.000
L2	47 - 0 (2)	TP51.37x38.655x0.375	2388.6	37.471	39.000	0.961	0.00	0.000	39.000	0.000

Pole Shear Design Data

Section No.	Elevation ft	Size	Actual V K	Actual f _v ksi	Allow. F _v ksi	Ratio $\frac{f_v}{F_v}$	Actual T kip-ft	Actual f _{vt} ksi	Allow. F _{vt} ksi	Ratio $\frac{f_{vt}}{F_{vt}}$
L1	100 - 47 (1)	TP40.72x28x0.3125	26.29	0.677	26.000	0.053	2.18	0.034	26.000	0.001
L2	47 - 0 (2)	TP51.37x38.655x0.375	32.28	0.529	26.000	0.041	2.11	0.016	26.000	0.001

Pole Interaction Design Data

Section No.	Elevation ft	Ratio P P_a	Ratio f_{bx} F_{bx}	Ratio f_{by} F_{by}	Ratio f_v F_v	Ratio f_{vt} F_{vt}	Comb. Stress Ratio	Allow. Stress Ratio	Criteria
L1	100 - 47 (1)	0.011	0.693	0.000	0.053	0.001	0.704 ✓	1.333	H1-3+VT ✓
L2	47 - 0 (2)	0.012	0.961	0.000	0.041	0.001	0.973 ✓	1.333	H1-3+VT ✓

Section Capacity Table

Section No.	Elevation ft	Component Type	Size	Critical Element	P K	$SF \cdot P_{allow}$ K	% Capacity	Pass Fail	
L1	100 - 47	Pole	TP40.72x28x0.3125	1	-16.25	2019.47	52.8	Pass	
L2	47 - 0	Pole	TP51.37x38.655x0.375	2	-28.58	3171.35	73.0	Pass	
							Summary		
							Pole (L2)	73.0	Pass
							RATING =	73.0	Pass

APPENDIX B
BASE LEVEL DRAWING



(INSTALLED—TO BE REMOVED)
(8) 1/2" TO 100 FT LEVEL

(NOT INSTALLED)
(1) 1-1/4" TO 100 FT LEVEL

(PROPOSED—IN CONDUIT)
(1) 3/8" TO 100 FT LEVEL
(2) 3/4" TO 100 FT LEVEL

(INSTALLED—IN CONDUIT—TO BE REMOVED)

(1) 1/2" TO 100 FT LEVEL

(INSTALLED—IN CONDUIT)

(1) 3/8" TO 100 FT LEVEL

(2) 3/4" TO 100 FT LEVEL

(INSTALLED)

(6) 1-1/4" TO 100 FT LEVEL

(PROPOSED)

(3) 5/16" TO 76 FT LEVEL

(1) 1-1/4" TO 76 FT LEVEL

(INSTALLED)

(3) 1-1/4" TO 76 FT LEVEL

(PROPOSED)


(2) 1-5/8" TO 65 FT LEVEL

(INSTALLED)

(2) 1/2" TO 86 FT LEVEL

(18) 7/8" TO 86 FT LEVEL

(1) 1-5/8" TO 86 FT LEVEL

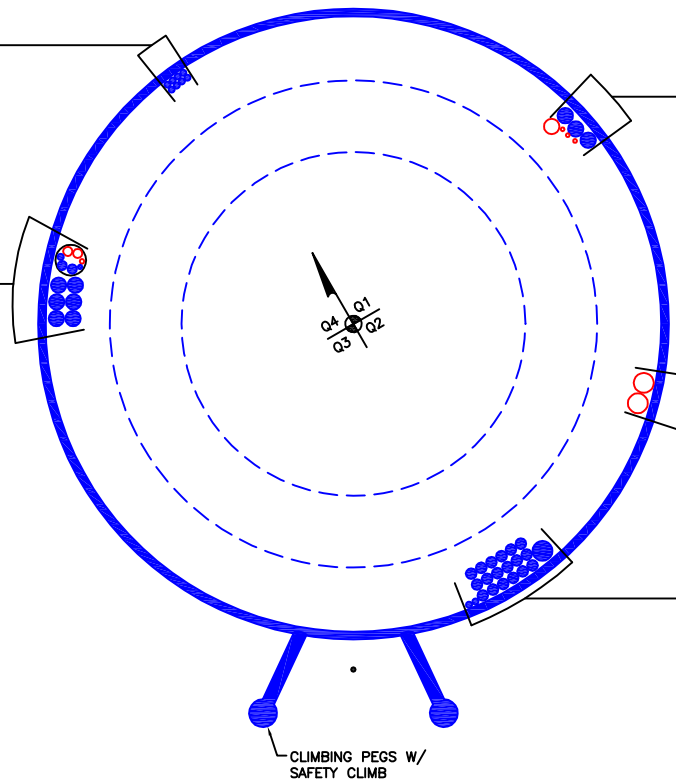

APPENDIX C
ADDITIONAL CALCULATIONS

Stiffened or Unstiffened, UngROUTed, Circular Base Plate - Any Rod Material

TIA Rev F

Site Data

BU#: 842869	
Site Name: Meriden West Central	
App #: 27002 Rev. 1	
Pole Manufacturer:	Other

Reactions

Moment:	2389	ft-kips
Axial:	29	kips
Shear:	32	kips

Anchor Rod Data

Qty:	20	
Diam:	2.25	in
Rod Material:	Other	
Strength (Fu):	65	ksi
Yield (Fy):	50	ksi
Bolt Circle:	59	in

If No stiffeners, Criteria:

AISC ASD

←-Only Applicable to Unstiffened Cases

Anchor Rod Results

Maximum Rod Tension: 95.7 Kips
 Allowable Tension: 113.7 Kips
 Anchor Rod Stress Ratio: 84.2% Pass

Rigid
Service, ASD
Fty*ASIF

Plate Data

Diam:	69	in
Thick:	3	in
Grade:	36	ksi
Single-Rod B-eff:	8.17	in

Base Plate Results

Base Plate Stress: 18.9 ksi
 Allowable Plate Stress: 36.0 ksi
 Base Plate Stress Ratio: 52.4% Pass

Flexural Check

Rigid
Service ASD
0.75*Fy*ASIF
Y.L. Length:
29.02

Stiffener Data (Welding at both sides)

Config:	0	*
Weld Type:		
Groove Depth:		<-- Disregard
Groove Angle:		<-- Disregard
Fillet H. Weld:		in
Fillet V. Weld:		in
Width:		in
Height:		in
Thick:		in
Notch:		in
Grade:		ksi
Weld str.:		ksi

n/a

Stiffener Results

Horizontal Weld : n/a
 Vertical Weld: n/a
 Plate Flex+Shear, fb/Fb+(fv/Fv)^2: n/a
 Plate Tension+Shear, ft/Ft+(fv/Fv)^2: n/a
 Plate Comp. (AISC Bracket): n/a

Pole Results



Pole Punching Shear Check: n/a

Pole Data

Diam:	51.37	in
Thick:	0.375	in
Grade:	65	ksi
# of Sides:	16	"0" IF Round
Fu	80	ksi
Reinf. Fillet Weld	0	"0" if None

Stress Increase Factor

ASIF:	1.333	
-------	-------	--




* 0 = none, 1 = every bolt, 2 = every 2 bolts, 3 = 2 per bolt

** Note: for complete joint penetration groove welds the groove depth must be exactly 1/2 the stiffener thickness for calculation purposes

ANALYSIS OF SPREAD FOOTING: OVERTURNING / BEARING

Engr = "CK"

JobDescription = "CN4-064R1"

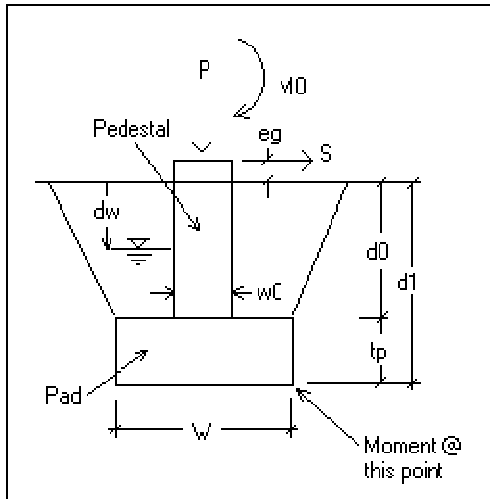

$P = 29 \cdot \text{kip}$ Compression load on foundation; does not include soil or concrete weight

$M_0 = 2.389 \times 10^3 \cdot \text{kip} \cdot \text{ft}$ Moment load on foundation

$S = 32 \cdot \text{kip}$ Shear load on foundation

$\sigma_b = 8000 \cdot \text{psf}$ Allowable bearing pressure

$\text{inet} = 0$ For allw. bearing(0=Gross, 1=Net); Net ignores fdn and soil weight for computed bearing pressure.

$\text{FOS}_{\text{REQ}} = 1.5$ Required FOS against overturning

INPUT:

$w_0 = 8 \text{ ft}$	Pedestal width	$e_g = 1 \text{ ft}$	Extension above grade
$\text{iped} = 1$	Pedestal type (0=round, 1=square)	$t_p = 2.5 \text{ ft}$	Pad thickness
$d_0 = 5 \text{ ft}$	Depth to top of pad	$W = 20 \text{ ft}$	Pad width (W x W)
$d_s = 5 \text{ ft}$	Depth to soil uplift cone (0=no cone, normally d_0)	$\gamma_c = 150 \cdot \text{pcf}$	Concrete density
$d_n = 0$	Depth of water to neglect for passive pr.	$\gamma_s = 110 \cdot \text{pcf}$	Soil density
		$\phi_s = 30 \cdot \text{deg}$	Soil angle of friction
$d_w = 8.5 \text{ ft}$	Depth of water; 0 = no water		

RESULTS

$W_{s1} = 184.80 \cdot \text{kip}$	Weight of soil directly above pad	$q_{\text{avg}} = 1.906 \cdot \text{ksf}$	Average bearing pressure
$W_c = 207.60 \cdot \text{kip}$	Total weight of foundation	$q_{\text{max}} = 3.812 \cdot \text{ksf}$	Maximum edge bearing pressure
$M_r = 5100.3 \cdot \text{kip} \cdot \text{ft}$	Total resisting moment	FOS = 1.92	Factor of safety against overturning
$M_t = 2.661 \times 10^3 \cdot \text{kip} \cdot \text{ft}$	Total applied moment		

Result = "Foundation is OK for overturning"

result1 = "Edge bearing pressure is OK."

result2 = "Average bearing pressure is OK"

$$\frac{(M_t \cdot \text{FOS}_{\text{REQ}})}{M_r} = 78.3 \cdot \%$$

$$\frac{q_{\text{max}}}{\sigma_b E} = 36.6 \cdot \%$$

RADIO FREQUENCY EMISSIONS ANALYSIS REPORT
EVALUATION OF HUMAN EXPOSURE POTENTIAL
TO NON-IONIZING EMISSIONS

T-Mobile Existing Facility

Site ID: CT11733B

Meriden West Central
450 - 478 West Main Street
Meriden, CT 06451

November 24, 2014

EBI Project Number: 62146378

Site Compliance Summary	
Compliance Status:	COMPLIANT
Site total MPE% of FCC general public allowable limit:	87.15 %

November 24, 2014

T-Mobile USA
Attn: Jason Overbey, RF Manager
35 Griffin Road South
Bloomfield, CT 06002

Emissions Analysis for Site: **CT11733B – Meriden West Central**

EBI Consulting was directed to analyze the proposed T-Mobile facility located at **450 - 478 West Main Street, Meriden, CT**, for the purpose of determining whether the emissions from the Proposed T-Mobile Antenna Installation located on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01 and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The number of $\mu\text{W}/\text{cm}^2$ calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits, therefore it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) – (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

General population/uncontrolled exposure limits apply to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general public would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Public exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The general population exposure limit for the 700 MHz Band is $467 \mu\text{W}/\text{cm}^2$, and the general population exposure limit for the PCS and AWS bands is $1000 \mu\text{W}/\text{cm}^2$. Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.

Occupational/controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

CALCULATIONS

Calculations were done for the proposed T-Mobile Wireless antenna facility located at **450 - 478 West Main Street, Meriden, CT**, using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. Since T-Mobile is proposing highly focused directional panel antennas, which project most of the emitted energy out toward the horizon, all calculations were performed assuming a lobe representing the maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was focused at the base of the tower. For this report the sample point is the top of a 6 foot person standing at the base of the tower.

For all calculations, all equipment was calculated using the following assumptions:

- 1) 2 GSM channels (PCS Band - 1900 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel
- 2) 2 UMTS channels (AWS Band – 2100 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel.
- 3) 2 LTE channels (AWS Band – 2100 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 60 Watts per Channel.
- 4) 1 LTE channel (700 MHz Band) was considered for each sector of the proposed installation. This channel has a transmit power of 30 Watts.
- 5) All radios at the proposed installation were considered to be running at full power and were uncombined in their RF transmissions paths per carrier prescribed configuration. Per FCC OET Bulletin No. 65 - Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. This is rarely the case, and if so, is never continuous.

- 6) For the following calculations the sample point was the top of a six foot person standing at the base of the tower. The maximum gain of the antenna per the antenna manufactures supplied specifications minus 10 dB was used in this direction. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 7) The antennas used in this modeling are the **Ericsson AIR21 B4A/B2P** for 1900 MHz (PCS) and 2100 MHz (AWS) channels and the **Commscope LNX-6515DS-VTM** for 700 MHz channels. This is based on feedback from the carrier with regards to anticipated antenna selection. The **Ericsson AIR21 B4A/B2P** has a maximum gain of **15.9 dBd** at its main lobe. The **Commscope LNX-6515DS-VTM** has a maximum gain of **14.6 dBd** at its main lobe. The maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was used for all calculations. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 8) The antenna mounting height centerline of the proposed antennas is **90 feet** above ground level (AGL).
- 9) Emissions values for additional carriers were taken from the Connecticut Siting Council active database. Values in this database are provided by the individual carriers themselves.

All calculations were done with respect to uncontrolled / general public threshold limits.

T-Mobile Site Inventory and Power Data

Sector:	A	Sector:	B	Sector:	C
Antenna #:	1	Antenna #:	1	Antenna #:	1
Make / Model:	Ericsson AIR21 B4A/B2P	Make / Model:	Ericsson AIR21 B4A/B2P	Make / Model:	Ericsson AIR21 B4A/B2P
Gain:	15.9 dBd	Gain:	15.9 dBd	Gain:	15.9 dBd
Height (AGL):	90	Height (AGL):	90	Height (AGL):	90
Frequency Bands	1900 MHz(PCS) / 2100 MHz (AWS)	Frequency Bands	1900 MHz(PCS) / 2100 MHz (AWS)	Frequency Bands	1900 MHz(PCS) / 2100 MHz (AWS)
Channel Count	2	Channel Count	2	# PCS Channels:	2
Total TX Power:	120	Total TX Power:	120	# AWS Channels:	120
ERP (W):	1,906.06	ERP (W):	1,906.06	ERP (W):	1,906.06
Antenna A1 MPE%	2.38	Antenna B1 MPE%	2.38	Antenna C1 MPE%	2.38
Antenna #:	2	Antenna #:	2	Antenna #:	2
Make / Model:	Ericsson AIR21 B4A/B2P	Make / Model:	Ericsson AIR21 B4A/B2P	Make / Model:	Ericsson AIR21 B4A/B2P
Gain:	15.9 dBd	Gain:	15.9 dBd	Gain:	15.9 dBd
Height (AGL):	90	Height (AGL):	90	Height (AGL):	90
Frequency Bands	1900 MHz(PCS) / 2100 MHz (AWS)	Frequency Bands	1900 MHz(PCS) / 2100 MHz (AWS)	Frequency Bands	1900 MHz(PCS) / 2100 MHz (AWS)
Channel Count	4	Channel Count	4	Channel Count	4
Total TX Power:	120	Total TX Power:	120	Total TX Power:	120
ERP (W):	1,906.06	ERP (W):	1,906.06	ERP (W):	1,906.06
Antenna A2 MPE%	2.38	Antenna B2 MPE%	2.38	Antenna C2 MPE%	2.38
Antenna #:	3	Antenna #:	3	Antenna #:	3
Make / Model:	Commscope LNX-6515DS-VTM	Make / Model:	Commscope LNX-6515DS-VTM	Make / Model:	Commscope LNX-6515DS-VTM
Gain:	14.6 dBd	Gain:	14.6 dBd	Gain:	14.6 dBd
Height (AGL):	90	Height (AGL):	90	Height (AGL):	90
Frequency Bands	700 Mhz	Frequency Bands	700 Mhz	Frequency Bands	700 Mhz
Channel Count	1	Channel Count	1	Channel Count	1
Total TX Power:	30	Total TX Power:	30	Total TX Power:	30
ERP (W):	445.37	ERP (W):	445.37	ERP (W):	445.37
Antenna A3 MPE%	0.94	Antenna B3 MPE%	0.94	Antenna C3 MPE%	0.94

Site Composite MPE%	
Carrier	MPE%
T-Mobile	17.10
Hunter Yagi 1	7.43 %
Hunter Yagi 2	7.43 %
Hunter Yagi 3	22.28 %
HunterWhip	7.43 %
Sprint	10.89 %
Verizon Wireless	14.59 %
Site Total MPE %:	87.15 %

T-Mobile Sector 1 Total:	5.70 %
T-Mobile Sector 2 Total:	5.70 %
T-Mobile Sector 3 Total:	5.70 %
Site Total:	87.15 %

Summary

All calculations performed for this analysis yielded results that were **within** the allowable limits for general public exposure to RF Emissions.

The anticipated maximum composite contributions from the T-Mobile facility as well as the site composite emissions value with regards to compliance with FCC's allowable limits for general public exposure to RF Emissions are shown here:

T-Mobile Sector	Power Density Value (%)
Sector 1:	5.70 %
Sector 2:	5.70 %
Sector 3 :	5.70 %
T-Mobile Total:	17.10 %
Site Total:	87.15 %
Site Compliance Status:	COMPLIANT

The anticipated composite MPE value for this site assuming all carriers present is **87.15%** of the allowable FCC established general public limit sampled at the ground level. This is based upon values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.



Scott Heffernan
RF Engineering Director

EBI Consulting
21 B Street
Burlington, MA 01803`