

445 Hamilton Avenue, 14th Floor White Plains, New York 10601 T 914 761 1300 F 914 761 5372 cuddyfeder.com

Daniel Patrick dpatrick@cuddyfeder.com

12/11/20

BY ELECTRONIC MAIL
Melanie A. Bachman
Executive Director
Connecticut Siting Council
10 Franklin Square
New Britain, CT 06051

Re: New Cingular Wireless PCS, LLC ("AT&T")

Notice of Exempt Modification Emergency Back-up Generator

170 Southeast Rd (aka 47 Garrett Ridge Rd), New Hartford, CT 06057

Lat.: 41.818830° Long.: -72.979205°

Dear Ms. Bachman:

This letter and enclosures are respectfully submitted on behalf of New Cingular Wireless PCS, LLC ("AT&T"). AT&T currently maintains its wireless telecommunications facility at 170 Southeast Rd (aka 47 Garrett Ridge Rd) in the Town of New Hartford, Connecticut. SBA Towers II LLC is the owner of the underlying property and the tower. AT&T submits this letter and enclosures to the Connecticut Siting Council ("Council") to notify the Council of AT&T's intent to perform modifications to the existing facility that do not have substantial adverse environmental effects and thus do not require a certificate pursuant to Section 16-50k of the Connecticut General Statutes.

AT&T intends to install one (1) new Generac 30KW Diesel Generator within the existing grade-level fenced equipment compound as demonstrated on the plans enclosed as Attachment 1. AT&T's existing facility supports its FirstNet program which provides first responders with priority access to AT&T's network to ensure adequate communication capabilities in the event of emergency. AT&T's proposed generator will ensure that critical communication capability for first responders and the public are not lost in the event of a loss of power.

AT&T's proposed generator will also advance the State's goal of natural disaster and emergency preparedness. As discussed in the Council's Docket 432 Findings and Report and Docket 440 proceedings and Findings of Fact (Nos. 76-77), in response to two significant storm events in

WESTCHESTER | NEW YORK CITY | HUDSON VALLEY | CONNECTICUT



12/11/20 Page 2

2011, the State formed a Two Storm Panel (the "Panel") that evaluated Connecticut's approach to planning and mitigation of impacts associated with emergencies and natural disasters. The Panel found that "wireless telecommunications service providers were not prepared to serve residential and business customers during a power outage" because certain companies had limited backup generator capacity.¹ The Panel also noted that "[t]he failure of a large portion of Connecticut's telecommunications system during the two storms is a life safety issue." The Panel recommended that State regulatory bodies review "telecommunications services currently in place to verify that the vendors have sufficient generator and backhaul capacity to meet the emergency needs of consumers and businesses" and that the "Connecticut Siting Council should require continuity of service plans for any cellular tower to be erected."² The planned modifications will ensure continuity of services by reinforcing AT&T's back-up power and backhaul capacity to meet the emergency needs of first responders, consumers and businesses in the event of a power outage.

The planned modifications to the facility fall squarely within the activities explicitly provided for in R.C.S.A. § 16-50j-72(b)(2) as the planned modifications:

- Will not result in an increase in the height of the existing structure;
- Will not require the extension of the site boundary;
- Will not increase noise levels at the facility by more than six decibels or more, or to levels that exceed state or local criteria since emergency backup generators are exempt from noise regulations as "noise created as a result of, or relating to, an emergency";³
- Will not increase radio frequency emission at the facility to a level at or above the Federal Communications Commission safety standards;
- Will not cause a change or alteration in the physical or environmental characteristics of the site; and
- Will not impair the structural integrity of the facility.

The facility was originally approved by the Council on November 20, 2003 in Docket No. 251 (and recertified in Dockets 314 and 380). This modification complies with the conditions of the aforementioned approvals.

¹ See Council Administrative Notice Item No. 39

² See Council Administrative Notice Item No. 39.

³ R.C.S.A. § 22a-69-1.8.



12/11/20 Page 3

The proposed modifications will have no impact on the existing tower structure itself or the radio-frequency emissions as the proposed modifications only consist of the addition of one new generator within the grade-level fenced equipment compound. Thus, AT&T respectfully requests a waiver from submission of information relating to the existing tower structure or the radio-frequency emissions. AT&T also notes that there will be no changes to the frequencies or services supported by this facility.

Please accept this letter as notification pursuant to R.C.S.A. § 16-50j-73 for construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-73. In accordance with R.C.S.A. § 16-50j-73, a copy of this letter and enclosure are being sent by email to Town First Selectman Daniel V. Jerram and the Planning & Zoning Department as well as by first class mail to SBA Towers II LLC as the owner of the structure and underlying property. Certificates of mailing is enclosed as Attachment 3.

For the foregoing reasons, AT&T respectfully submits that the proposed modification to the above referenced wireless telecommunications facility constitutes an exempt modification under R.C.S.A. § 16-50j-72(b)(2).

Very truly yours,

Daniel Patrick

Attachments

cc: First Selectman Daniel V. Jerram, Town of New Hartford (via email)
Michael Lucas, Zoning Enforcement Officer (via email)

SBA Towers II LLC, Tower and Property Owner (via first-class mail)

AT&T

General Dynamics Information Technology

Lucia Chiocchio, Esq. & Julie Durkin, Cuddy & Feder LLP

ATTACHMENT 1



at&t Mobility

SITE NAME: NEW HARTFORD - SOUTHEAST RD FA LOCATION CODE: 10091787 **SBA SITE ID #:CT 12219**

GENERATOR PROJECT 30KW GENERAC DIESEL GENERATOR 200A GENERAC ATS

170 SOUTHEAST RD NEW HARTFORD, CT 06057

VICINITY MAP SITE LOCATION

SCOPE OF WORK

ADD STANDBY GENERATOR, ASSOCIATED CONCRETE PAD, AND UTILITY EQUIPMENT TO EXISTING AT&T EQUIPMENT AREA. THERE WILL BE NO CHANGE IN THE SIZE OR HEIGHT OF THE TOWER OR ANTENNAS.

> TO OBTAIN LOCATION OF PARTICIPANTS' UNDERGROUND FACILITIES BEFORE YOU DIG IN CONNECTICUT CALL BEFORE YOU DIG

811 OR 1-800-922-4455


CONNECTICUT PUBLIC ACT 87-71 REQUIRES MIN, 2 WORKING DAYS NOTICE BEFORE YOU EXCAVATE.

APPLICABLE BUILDING CODE \$ STANDARDS

ALL WORK AND MATERIALS SHALL BE PERFORMED AND INSTALLED IN ACCORDANCE WITH THE CURREN' EDITION OF THE FOLLOWING CODES AS ADOPTED BY THE GOVERNING LOCAL AUTHORITIES. NOTHING NITHESE PLANS ARE TO BE CONSTRUCTED TO PERMIT WORK NOT CONFORMING TO THESE CODES:

- INTERNATIONAL BUILDING CODE 2015
- 2. NATIONAL ELECTRIC CODE 2017
- 3. AMERICAN CONCRETE INSTITUTE (ACI) 3 | 8. BUILDING CODE REQUIREMENTS FOR STRUCTURAL
- 4. AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC), MANUAL OF STEEL CONSTRUCTION
- . TELECOMMUNICATIONS INDUSTRY ASSOCIATION (TIA) 222-G, STRUCTURAL STANDARDS FOR STEEL OWER AND ANTENNA SUPPORTING STRUCTURES
- . TIA 607, COMMERCIAL BUILDING GROUNDING AND BONDING REQUIREMENTS FOR

AERIAL VIEW OF SITE

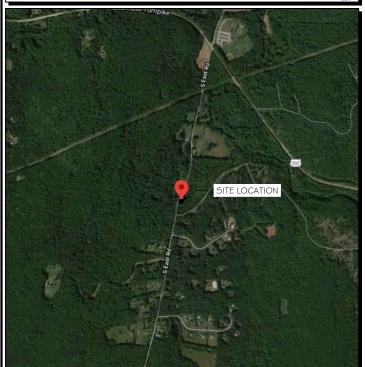

PROJECT INFORMATION

PROJECT MANAGER:

JOF JARVIS MARKET LEAD

1

GENERAL DYNAMICS WIRELESS SERVICES

661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406 joseph.jarvis@gdit.com

ENGINEER:

RAMAKER \$ ASSOCIATES, INC. 855 COMMUNITY DRIVE SAUK CITY, WI 53583 PH.: (608) 643-4100 FAX: (608) 643-7999 CONTACT: TYLER BEATTY

tbeatty@ramaker.com

APPLICANT INFORMATION: 7150 STANDARD DR HANOVER, MD 21076

SITE NAME: NEW HARTFORD - SOUTHEAST RD FA NUMBER: 10091787

PROPERTY OWNER: SBA TOWERS 805 I CONGRESS AVENUE BOCA RATON, FL 33487

ADDRESS 170 SOUTHEAST RD NEW HARTFORD, CT 06057

COUNTY: LITCHFIELD

41.818830° -72.979205°

GROUND ELEVATION: 538 FT AMSL

DO NOT SCALE DRAWINGS CONTRACTOR SHALL VERIFY ALL PLANS & EXISTING DIMENSIONS & CONDITIONS ON THE JOB SITE & SHALL IMMEDIATELY NOTIFY THE ENGINEER IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK OR BE RESPONSIBLE FOR SAME

THE INFORMATION CONTAINED IN THIS SET OF DOCUMENTS IS PROPRIETARY BY NATURE. ANY USE OR DISCLOSURE OTHER THAN THAT WHICH RELATES TO THE CLIENT IS STRICTLY PROHIBITED.

SHEET INDEX

GENERAL:

T-I TITLE SHEET

NOTES:

N-I GENERAL NOTES

A-I SITE PLAN

S-I FOUNDATION DETAILS

ELECTRICAL & GROUNDING:

- WIRING DETAILS
- E-2 PANEL AND PENETRATION DETAILS
- E-3 ATS, CONDUIT & GROUND ROD DETAILS E-4 GENERAC GENERATOR SPECIFICATIONS
- E-4. I GENERAC GENERATOR SPECIFICATIONS
- E-4.2 GENERAC GENERATOR SPECIFICATIONS E-5 GENERAC ATS SPECIFICATIONS
- E-5. I GENERAC ATS SPECIFICATIONS

SIGNATURE BLOCK

AT¢T MGR. DATE

GENERAL DYNAMICS DATE

CONSTRUCTION MGR.

SITE ACQUISITION

GENERAL DYNAMICS

CONSULTANT:

PREPARED FOR:

661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

Information Technology, Inc.

hereby certify that this plan, specification.

GENERAL DYNAMICS

RAMAKER

(608) 643-4100 www.ramaker.com



MARK	DATE	DESCRIPTION

DATE 8/3 1/2020 NEW HARTFORD -

SOUTHEAST RD FA ID # 10091787

170 SOUTHEAST RD NEW HARTFORD, CT 06057

TITLE SHEET

SCALE: NONE

48258

- I. THE GENERAL SUBCONTRACTOR MUST VERIFY ALL DIMENSIONS, CONDITIONS AND ELEVATIONS BEFORE PROCEEDING WITH THE WORK. ALL WORK SHALL BE PERFORMED IN A WORKMANLIKE MANNER IN ACCORDANCE WITH ACCEPTED CONSTRUCTION PRACTICES.
- 2. IT IS THE INTENTION OF THESE DRAWINGS TO SHOW THE COMPLETED INSTALLATION. THE SUBCONTRACTOR SHALL BE RESPONSIBLE FOR ALL TEMPORARY BRACING, SHORING, TIES, FORM WORK, ETC. IN ACCORDANCE WITH ALL NATIONAL, STATE, AND LOCAL ORDINANCES, TO SAFELY EXECUTE ALL WORK AND SHALL BE RESPONSIBLE FOR SAME. ALL WORK SHALL BE IN ACCORDANCE WITH LOCAL CODES.
- 3. THE SUBCONTRACTOR SHALL USE ADEQUATE NUMBER OF SKILLED WORKMAN WHO ARE THOROUGHLY TRAINED AND EXPERIENCED IN THE NECESSARY CRAFTS AND WHO ARE COMPLETELY FAMILIAR WITH THE SPECIFIED REQUIREMENTS AND METHOD NEEDED FOR PROPER PERFORMANCE OF THE WORK
- 4. CONSTRUCTION SUBCONTRACTOR AGREES THAT IN ACCORDANCE WITH GENERALLY ACCEPTED CONSTRUCTION PRACTICES, CONSTRUCTION SUBCONTRACTOR WILL BE REQUIRED TO ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THE PROJECT, INCLUDING THE SAFETY OF ALL PERSONS AND PROPERTY, THAT THIS REQUIREMENT SHALL BE MADE TO APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS AND CONSTRUCTION SUBCONTRACTOR FURTHER AGREES TO INDEMNIPY AND HOLD DESIGN ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH PERFORMANCE OF WORK ON THIS PROJECT.
- 5. SITE GROUNDING SHALL COMPLY WITH AT&T WIRELESS SERVICES TECHNICAL SPECIFICATIONS FOR FACILITY GROUNDING FOR CELL SITE STANDARDS, LATEST EDITION, AND COMPLY WITH AT&T TOWERS GROUNDING CHECKLIST, LATEST VERSION. WHEN NATIONAL AND LOCAL GROUNDING CODES ARE MORE STRINGENT THEY SHALL GOVERN. GROUNDING SHALL BE COMPLETED BEFORE ERECTION OF TOWER.
- 6. ALL WORK SHALL COMPLY WITH OSHA AND STATE SAFETY REQUIREMENTS. PROCEDURES FOR THE PROTECTION OF EXCAVATIONS, EXISTING CONSTRUCTION AND UTILITIES SHALL BE ESTABLISHED PRIOR TO FOUNDATION INSTALLATION, IF TEMPORARY LIGHTING AND MARKING IS REQUIRED BY THE FEDERAL AVIATION ADMINISTRATION (FAA), IT IS THE SUBCONTRACTOR'S RESPONSIBILITY TO MAINTAIN THE NECESSARY LIGHTS AND NOTIFY THE PROPER AUTHORITIES IN THE EVENT OF A PROBLEM.
- 7. ALL WORK SHALL BE ACCOMPLISHED IN ACCORDANCE WITH ALL LOCAL, STATE, AND FEDERAL CODES OR ORDINANCES. THE MOST STRINGENT CODE WILL APPLY IN THE CASE OF DISCREPANCIES OR DIFFERENCES IN THE CODE REQUIREMENTS.
- 8. ANY DAMAGE TO THE ADJACENT PROPERTIES WILL BE CORRECTED AT THE SUBCONTRACTOR'S EXPENSE TO THE SATISFACTION OF THE LANDOWNER AND THE ENGINEER,
- 9. THE COMPLETE BID PACKAGE INCLUDES THESE CONSTRUCTION DRAWINGS ALONG WITH THE SPECIFICATIONS. SUBCONTRACTOR IS RESPONSIBLE FOR REVIEW OF TOTAL BID PACKAGE PRIOR TO BID SUBMITTAL
- IO. SUBCONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES WITHIN CONSTRUCTION LIMITS PRIOR TO CONSTRUCTION.
- I I. THE SUBCONTRACTOR IS RESPONSIBLE FOR MAINTAINING POSITIVE DRAINAGE ON THE SITE AT ALL TIMES. SILT AND EROSION CONTROL SHALL BE MAINTAINED ON THE DOWNSTREAM SIDE OF THE SITE AT ALL TIMES. ANY DAMAGE TO ADJACENT PROPERTIES WILL BE CORRECTED AT THE SUBCONTRACTOR'S EXPENSE.
- I 2. CLEARING OF TREES AND VEGETATION ON THE SITE SHOULD BE HELD TO A MINIMUM. ONLY THE TREES NECESSARY FOR CONSTRUCTION OF THE FACILITIES SHALL BE REMOVED. ANY DAMAGE TO THE PROPERTY OUTSIDE THE LEASED PROPERTY SHALL BE REPAIRED BY THE SUBCONTRACTOR.
- I 3. ALL SUITABLE BORROW MATERIAL FOR BACK FILL OF THE SITE SHALL BE INCLUDED IN THE BID. EXCESS TOPSOIL AND UNSUITABLE MATERIAL SHALL BE DISPOSED OF OFF SITE AT LOCATIONS APPROVED BY GOVERNING AGENCIES PRIOR TO DISPOSAL.
- I 4. SEEDING AND MULCHING OF THE SITE WILL BE ACCOMPLISHED AS SOON AS POSSIBLE AFTER COMPLETION OF THE SITE DEVELOPMENT. THE SUBCONTRACTOR IS RESPONSIBLE FOR PROVIDING AND MAINTAIN AN ADEQUATE COVER OF VEGETATION OVER THE SITE FOR A ONE YEAR PERIOD.
- 15. PERMITS: THE SUBCONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING AND INCURRING THE COST OF ALL REQUIRED PERMITS, INSPECTIONS, CERTIFICATES, ETC.
- I.G. RECORD DRAWINGS: MAINTAIN A RECORD OF ALL CHANGES, SUBSTITUTIONS BETWEEN WORK AS SPECIFIED AND INSTALLED. RECORD CHANGES ON A CLEAN SET OF CONTRACT DRAWINGS WHICH SHALL BE TURNED OVER TO THE CONSTRUCTION MANAGER UPON COMPLETION OF THE PROJECT.
- 17. THE PLANS SHOW SOME KNOWN SUBSURFACE STRUCTURES, ABOVE GROUND STRUCTURES AND/OR EXISTING UTILITIES BELIEVED TO BE IN THE WORKING AREA. IT IS THE RESPONSIBILITY OF THE SUBCONTRACTOR TO VERIFY ALL UTILITIES, PIPELINES AND OTHER STRUCTURES SHOWN OR NOT SHOWN ON THESE PLANS. THE SUBCONTRACTOR SHALL CONTACT THE LOCAL JURISDICTION'S DIGGER'S HOTLINE BEFORE DIGGING OR DRILLING. ANY DAMAGE TO EXISTING UTILITIES SHALL BE REPAIRED TO THE SATISFACTION OF THE OWNER AND ENGINEER AT THE SUBCONTRACTOR'S EXPENSE.

GENERAL NOTES:

- I. THIS PROPOSAL IS FOR THE ADDITION OF A NEW GENERATOR ON A CONCRETE PAD TO AN EXISTING UNMANNED TELECOMMUNICATIONS FACILITY CONSISTING OF AN EQUIPMENT SHELTER AND TOWER
- 2. THE PROPOSED FACILITY WILL BE UNMANNED AND DOES NOT REQUIRE POTABLE WATER OR SEWER SERVICE.
- 3. THE PROPOSED FACILITY IS UNMANNED AND IS NOT FOR HUMAN HABITAT. (NO HANDICAP

- 4. OCCUPANCY IS LIMITED TO PERIODIC MAINTENANCE AND INSPECTION, APPROXIMATELY 2 TIMES PER MONTH BY $\Delta T \neq T$ TECHNICIANS.
- 5. OUTDOOR STORAGE AND SOLID WASTE CONTAINERS ARE NOT PROPOSED.
- 6. ALL MATERIAL SHALL BE FURNISHED AND WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS.
- 7. SUBCONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING ANY DAMAGE CAUSED BY THE CONSTRUCTION OPERATION.
- 8. SUBCONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL PERMITS AND INSPECTION REQUIRED FOR CONSTRUCTION.
- 9. SUBCONTRACTOR SHALL REMOVE ALL TRASH AND DEBRIS FROM THE SITE ON A DAILY BASIS.

ELECTRICAL NOTES: A. GENERAL

ACCESS IS REQUIRED)

- COORDINATE LOCATION AND POWER REQUIREMENTS OF ALL EQUIPMENT WITH AT&T AND EQUIPMENT SUPPLIER PRIOR TO INSTALLATION.
- COORDINATE LOCATION AND REQUIREMENTS FOR ELECTRICAL AND TELEPHONE SERVICES
 WITH THE PROPERTY REPRESENTATIVE, AT&T AND UTILITY COMPANIES. ROUTING OF
 CONDUITS MAY BE MODIFIED TO MEET SITE REQUIREMENTS. EXACT CONDUIT ROUTING TO
 BE DETERMINED IN THE FIELD.
- 3. ALL WIRING AND EQUIPMENT SHOWN ON ELECTRICAL SHEETS SHALL BE FURNISHED AND INSTALLED UNDER ELECTRICAL PORTION OF CONTRACT UNLESS OTHERWISE NOTED
- 4. UNINTERRUPTED ELECTRICAL SERVICE FOR EXISTING EQUIPMENT SHALL BE MAINTAINED DURING THE INSTALLATION OF THE WORK DESCRIBED UNDER THESE DOCUMENTS. TEMPORARY EQUIPMENT, CABLES AND WHATEVER ELSE IS NECESSARY SHALL BE PROVIDED AS REQUIRED TO MAINTAIN ELECTRICAL SERVICE. TEMPORARY SERVICE FACILITIES, IF REQUIRED AT ANY TIME, SHALL NOT BE DISCONNECTED OR REMOVED UNTIL NEW SERVICE EQUIPMENT IS IN PROPER OPERATION. IF ANY SERVICE OR SYSTEM MUST BE INTERRUPTED, THE CONTRACTOR SHALL REQUEST PERMISSION IN WRITING STATING THE DATE, TIME, ETC. THE SERVICE WILL BE INTERRUPTED AND THE AREAS AFFECTED. THIS REQUEST SHALL BE MADE IN SUFFICIENT TIME FOR PROPER ARRANGEMENTS TO BE MADE. WRITTEN PERMISSION SHALL BE OBTAINED FROM THE OWNER BEFORE INTERRUPTING ELECTRICAL SERVICE.
- 5. COORDINATE NEW WORK WITH OTHER TRADES AND VERIFY EXISTING CONDITIONS TO AVOID INTERFERENCE. IN CASE OF INTERFERENCE, AT&T'S REPRESENTATIVE WILL DECIDE WHICH WORK IS TO BE RELOCATED, REGARDLESS OF WHICH WAS FIRST INSTALLED.
- 6. THE INSTALLATION MUST COMPLY WITH NEC AND ALL FEDERAL, STATE AND LOCAL RULES AND REGULATIONS.
- 7. THE DRAWINGS ARE DIAGRAMMATIC AND INDICATE THE GENERAL ARRANGEMENT OF SYSTEMS AND EQUIPMENT UNLESS OTHERWISE DEFINED BY DIMENSIONS OR DETAILS, EXACT EQUIPMENT LOCATIONS AND RACEWAY ROUTING SHALL BE GOVERNED BY ACTUAL FIELD CONDITIONS AND/OR DIRECTIONS FROM AT\$T'S REPRESENTATIVE.
- 8. CONTRACTOR SHALL PAY ALL PERMITS AND FEES REQUIRED.
- 9. ALL MATERIALS SHALL BE FURNISHED AND WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE APPLICABLE SECTIONS OF THE STANDARDS REFERENCED BELOW:
 - a. ANSI (AMERICAN NATIONAL STANDARDS INSTITUTE)
 - b. ASTIM (AMERICAN SOCIETY FOR TESTING MATERIALS)
 - c. ETL (ELECTRICAL TESTING LABORATORY)
 - d. ICEA (INSULATED CABLE ENGINEERS ASSOCIATION)
 - . IEEE (INSTITUTE OF ELECTRICAL AND ELECTRONIC ENGINEERS)
 MBFIJ (NATIONAL BOARD OF FIRE UNDERWRITERS)
 - 7. MBPU (NATIONAL BOARD OF FIRE UNDERWRITERS 2. NESC (NATIONAL ELECTRICAL SAFETY CODE)
 - n. NEMA (NATIONAL ELECTRICAL MANUFACTURER'S ASSOCIATION)
 - . NFPA (NATIONAL FIRE PROTECTION ASSOCIATION)
 - J. UL (UNDERWRITER'S LABORATORY)
- IO. CONTRACTOR SHALL REVIEW PLANS, DETAILS AND SPECIFICATIONS IN DETAIL AND ADJUST WORK TO CONFORM WITH ACTUAL SITE CONDITIONS SO THAT ELECTRICAL DEVICES AND EQUIPMENT WILL BE LOCATED AND READILY ACCESSIBLE. QUANTITIES LISTED IN MATERIAL LISTS ON THE DRAWINGS ARE FOR INFORMATION ONLY. THE CONTRACTOR SHALL PROVIDE HIS OWN TAKEOFF FOR MATERIAL QUANTITY AND TYPES BASED ON ACTUAL SITE CONDITIONS, IN ADDITION, CONTRACTOR SHALL PROVIDE ALL NECESSARY MATERIALS TO INSTALL EQUIPMENT FURNISHED BY AT&T OR ITS SUPPLIERS. ALL ITEMS NOT SPECIFICALLY MENTIONED HEREIN OR SHOWN ON THE DRAWINGS, BUT WHICH ARE OBVIOUSLY NECESSARY TO MAKE A COMPLETE WORKING INSTALLATION, SHALL BE INCLUDED.
- II. THE CONTRACTOR OR BIDDER SHALL BEAR THE RESPONSIBILITY OF NOTIFYING (IN WRITING) ATET'S REPRESENTATIVE OF ANY CONFLICTS PRIOR TO THE SUBMISSION OF CONTRACTOR'S PROPOSAL OR PERFORMANCE OF WORK, IN THE EVENT OF DISCREPANCIES THE CONTRACTOR SHALL PRICE THE MORE COSTLY OR EXTENSIVE WORK, UNLESS DIRECTED IN WRITING OTHERWISE.
- 12. ALL FLOORS WHERE PENETRATIONS ARE REQUIRED IN BUILDING ARE TO BE CORE DRILLED AND THEN FIREPROOFED.

3. WIRING/CONDUIT

- PROVIDE PULL BOXES AND JUNCTION BOXES WHERE SHOWN OR AS REQUIRED BY CODE SUCH THAT NO MORE THAN THE EQUIVALENT OF FOUR QUARTER BENDS (380 DEGREES TOTAL) EXIST IN A CONDUIT RUN.
- 2. ALL POWER AND CONTROL/INDICATION WIRING SHALL BE TYPE THHN/THWN 800V RATED 75 DEGREES CELSIUS, UNLESS NOTED OTHERWISE.

- 3. SCHEDULE 80 PVC CONDUIT SHALL BE USED ABOVE GROUND, WHERE ABOVE GRADE IS DEFINED AS THE GROUND OF THE TURN-UP
- 4. BELL END OR TERMINAL ADAPTER MUST BE INSTALLED ON END OF PVC CONDUIT PER NEC 352 46, 300 4 F. (3)
- CONDUIT BENDS SHALL BE MADE IN ACCORDANCE WITH NEC TABLE 346-10. NO RIGHT ANGLE DEVICE OTHER THAN STANDARD CONDUIT ELBOWS WITH 12" MINIMUM INSIDE SWEEPS FOR ALL CONDUITS 2" OR LARGER.
- 6. POWER WIRING SIZE SHALL NOT BE SMALLER THAN #12 AWG.
- 7. ALL WIRING SHALL BE COPPER. ALUMINUM WILL NOT BE ACCEPTABLE ALL POWER CIRCUITS SHALL CONTAIN A GROUND WIRE.
- 8. PHASE MARKINGS TO BE USED AT POWER CONDUCTOR TERMINATIONS.
- CONTRACTOR SHALL ENSURE INTEGRITY IS MAINTAINED WHEN INSTALLING CONDUIT AND WIRING.
- 10. INSTALL PULL STRING IN ALL CONDUIT.
- II. FOR ROOFTOP INSTALLS AND BUILD-OUTS, CONDUITS INSIDE BUILDING AND ON ROOF SHALL BE RGS, UNLESS OTHERWISE NOTED. FOR RAW LAND SITES AND CO-LOCATES, PVC SCHEDULE 80 SHALL BE UTILIZED UNLESS NOTED OTHERWISE.
- MAINTAIN MINIMUM I'-O" VERTICAL AND I'-O" HORIZONTAL SEPARATIONS FROM ANY MECHANICAL GAS PIPING.
- 13. ALL WIRING ROUTED IN PLENUM TO BE RATED OR IN METALLIC FLEX (LIQUIDITE) CONDUIT.

C. EQUIPMENT

- I. EQUIPMENT/PARTS CONNECTED TO EXISTING PANELS, DUCTS, ETC. SHALL MATCH THE CHARACTERISTICS (A/C, V, A) OF THAT EQUIPMENT.
- 2. ALL ELECTRICAL EQUIPMENT OUTSIDE SHALL BE NEMA OR 3R RATED.

D. GROUNDING

- ALL GROUND CONNECTIONS TO BUILDING SHALL BE MADE USING TWO-HOLE CONNECTORS
 PROVIDE STAINLESS STEEL BOLTS AND LOCK WASHERS ON ALL MECHANICAL GROUND
 CONNECTIONS.
- ALL EQUIPMENT SURFACES TO BE BONDED TO GROUNDING SYSTEM SHALL BE STRIPPED OF ALL PAINT AND DIRT. CONNECTIONS TO VARIOUS METALS SHALL BE OF A TYPE AS TO CAUSE A GALVANIC OR CORROSIVE REACTION. AREA SHALL BE REPAINTED FOLLOWING BONDING.
- 3. ANY METALLIC ITEM WITHIN 6' OF GROUND CONDUCTORS MUST BE CONNECTED TO THE GROUNDING SYSTEM.
- 4. EXTERIOR, ABOVE GRADE GROUND CONNECTIONS SHALL BE FURNISHED WITH A LIBERAL PROTECTIVE COATING OF ANTI-OXIDE COMPOUND.
- 5. ALL MATERIALS AND LABOR REQUIRED FOR THE GROUNDING SYSTEM AS INDICATED ON THE PLANS AND DETAILS, AND AS DESCRIBED HEREIN SHALL BE FURNISHED BY THIS CONTRACTOR LINESS OTHERWISE NOTED.
- EXACT LOCATION OF GROUND CONNECTION POINTS SHALL BE DETERMINED IN FIELD.
 ADJUST LOCATIONS INDICATED ON PLANS ACCORDING TO ACTUAL EQUIPMENT LOCATIONS
 TO KEEP THE GROUND CONNECTION CABLES AS SHORT AS PRACTICAL.
- 7. PROVIDE ALL ELECTRICAL SYSTEM AND EQUIPMENT GROUNDS AS REQUIRED BY THE CURRENT EDITION OF THE NATIONAL ELECTRIC CODE (1999) AND THE CURRENT EDITION OF THE NATIONAL ELECTRICAL SAFETY CODE. BONDING JUMPERS WITH APPROVED GROUND FITTINGS SHALL BE INSTALLED AT ALL RACEWAYS, EQUIPMENT ENCLOSURES, PULL BOXES, ETC. TO MAINTAIN GROUND CONTINUITY WHERE REQUIRED BY CODE.
- 8. ALL EQUIPMENT GROUND CONDUCTORS SHALL BE TIN COATED, #2 AWG COPPER UNLESS NOTED OTHERWISE ON THE DRAWINGS.
- PROVIDE PRE AND POST GROUND TEST RESULTS, USING CLAMP-ON TESTER. TEST RESULTS SHALL BE PHOTOS WITH DIGITAL TIME AND GPS STAMPED/EMBEDDED.

E. INSPECTION/DOCUMENTATION

- THE CONTRACTOR, UPON COMPLETION OF HIS WORK, SHALL PROVIDE AS-BUILT DRAWINGS INFORMATION SHOULD BE GIVEN TO THE GENERAL CONTRACTOR FOR INCLUSION IN FINAL AS-BUILT SURVEY DOCUMENTS TO BE GIVEN TO THE OWNER.
- CONTRACTOR SHALL SUPPLY DOCUMENTATION ATTESTING TO THE COMPLETE GROUND SYSTEM'S RECEPTIVITY (MAX. 5 OHMS).
- AN ELECTRICAL INSPECTION SHALL BE MADE BY AND INSPECTING AGENCY APPROVED BY AT&T'S REPRESENTATIVE. CONTRACTOR SHALL COORDINATE ALL INSPECTIONS AND OBTAIN POWER COMPANY APPROVAL.
- 4. CONTRACTOR SHALL HAVE ATS AND GENERATOR RELAY INSTALLATION AND CONNECTIONS INSPECTED BY OTHERS TO ENSURE THAT UL LISTING FOR THAT EQUIPMENT IS NOT VOIDED.







CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

Certification \$ Seal:

I hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensec Professional Engineer under the laws of the State of Connecticut.



ISSUE FINAL PHASE FINAL

> NEW HARTFORD -SOUTHEAST RD

FA ID # 10091787

DATE 8/3 1/2020

I 70 SOUTHEAST RD NEW HARTFORD, CT 06057

SHEET TITLE:

GENERAL NOTES

SCALE: NONE

PROJECT 48258

SCOPE OF WORK DETAILS GENERAL:

- NEW GENERAC DIESEL GENERATOR PROVIDED BY GENERAL DYNAMICS & INSTALLED BY GENERAL CONTRACTOR, SEE
- NEW 4'-0" X 10'-0" CONCRETE PAD PROVIDED \$ INSTALLED BY GENERAL CONTRACTOR (AS REQUIRED) SEE S-I
 NEW GENERAC AUTOMATIC TRANSFER SWITCH PROVIDED
- BY GENERAL DYNAMICS & INSTALLED BY CONTRACTOR (AS REQUIRED) SEE E-3 \$ E-5.
- CONTRACTOR TO VERIFY ALL EXISTING UTILITIES PRIOR TO CONSTRUCTION
- CONTRACTOR SHALL RESTORE & REPAIR ANY DAMAGED AREAS CAUSED BY CONSTRUCTION TO ORIGINAL OR BETTER CONDITION

- INSTALL PULL STRING IN EACH CONDUIT
- (I) NEW 2" AND (I) NEW I" ELECTRICAL CONDUITS WITH CONDUCTORS TO RUN FROM NEW GENERATOR TO NEW ATS. CONDUIT PROVIDED AND INSTALLED BY GENERAL
- CONTRACTOR. SEE E-1, E-2 & E-3.


 (1) NEW 1" ELECTRICAL CONDUIT WITH CONDUCTORS TO RUN FROM NEW GENERATOR TO AC PANEL. CONDUIT PROVIDED \$ INSTALLED BY GENERAL CONTRACTOR. SEE E-I, E-2 & E-3.
- (1) NEW 1" ALARM CONDUIT & CABLING PROVIDED & INSTALLED BY GENERAL CONTRACTOR. SEE E-1, E-2 & E-3.

GROUNDING:

NEW EXOTHERMIC CONNECTION FROM EXISTING GROUND RING TO NEW MECHANICAL CONNECTION AT GENERATOR CHASSIS. GENERAL CONTRACTOR TO VERIFY LOCATION IN FIELD. LOCATE GROUND RODS NO MORE THAN 8'-0" APART

> PROPOSED AT&T GENERAC 30kW DIESEL GENERATOR LOCATION. SEE SHEET E-4 FOR SPECIFICATIONS.

PROPOSED 4'-0" X 10'-0" CONCRETE PAD. SEE SHEET S-I FOR DETAILS.

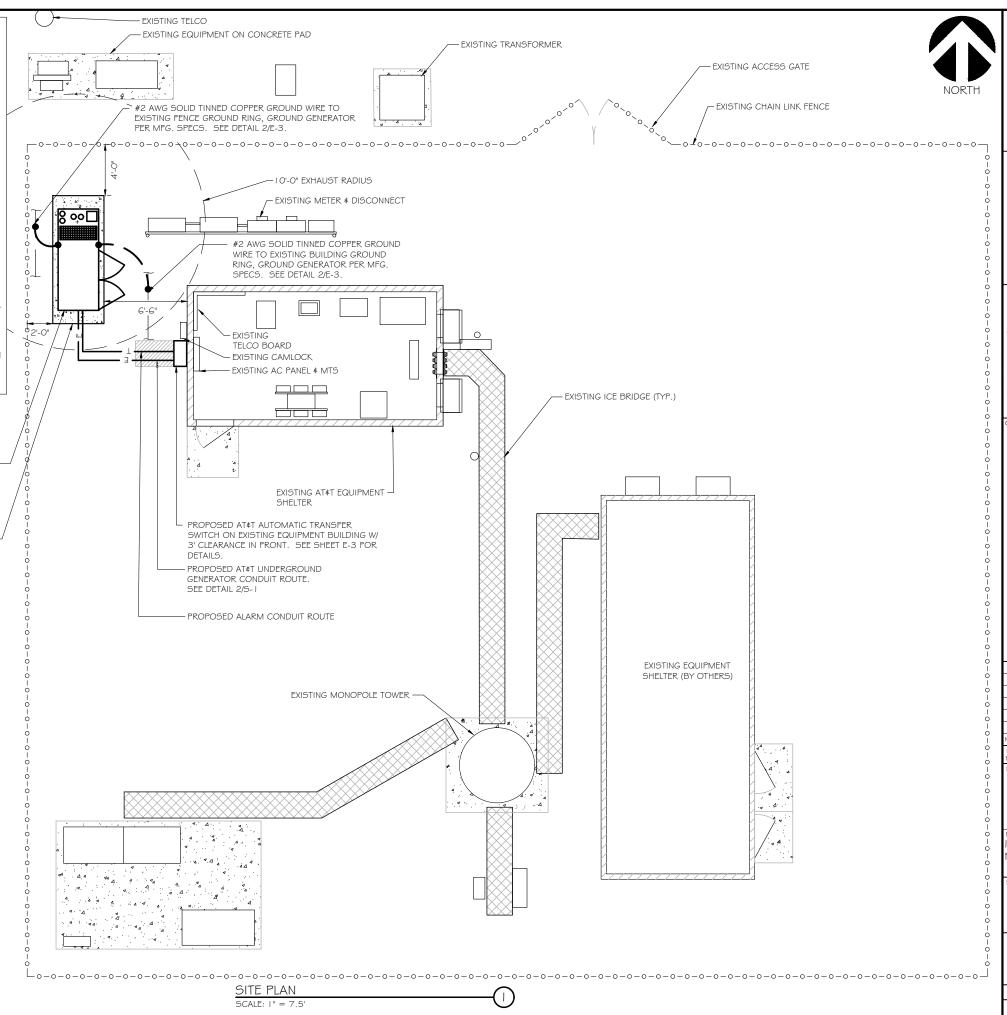



PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensec Professional Engineer under the laws of the State of <u>Connecticut</u>.



DATE 8/3 1/2020

FINAL

NEW HARTFORD -SOUTHEAST RD FA ID # 10091787


70 SOUTHEAST RD NEW HARTFORD, CT 06057

SHEET TITLE:

SITE PLAN

O	3.7	75'	7.	5'		
-						
11" x 22" x			" = 3 " = 3			
PROJEC NUMBER	Ţ		-	482	58	
SHEET				Λ	ī	



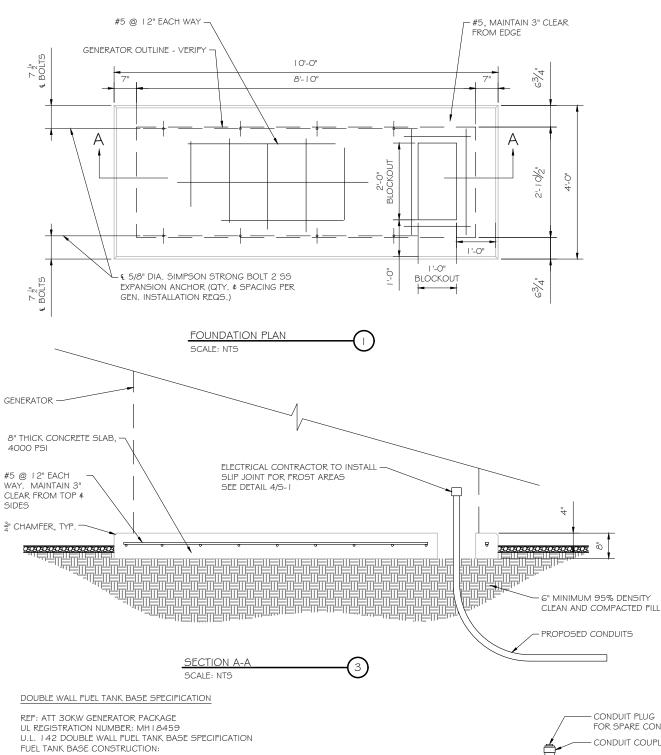

- BE CONSTRUCTED IN ACCORDANCE WITH UNDERWRITERS LABORATORIES STANDARD UL-142. BE CONSTRUCTED IN ACCORDANCE WITH FLAMMABLE & COMBUSTIBLE LIQUIDS CODE, NFPA 30; THE STANDARD FOR INSTALLATION & USE OF STATIONARY COMBUSTIBLE ENGINE & GAS TURBINES, NFPA 37; AND THE STANDARD FOR EMERGENCY & STANDBY POWER SYSTEMS, NFPA 110.
- ANCHORS MINIMUM (4) @ 5/8" FOR GEN-SET MOUNTING
- SUB BASE TANK TESTING: PRIMARY TANK \$ SECONDARY CONTAINMENT BASIN SECTIONS

PRESSURIZED AT 3-5 PSI AND LEAK-CHECKED TO ENSURE INTEGRITY OF SUB BASE WELD

PER UL-142 STANDARDS


FUEL FILL: 5 GALLON SPILL CONTAINMENT WITH ALARM

40% REMAINING FOR ALARM

20% REMAINING FOR SHUT-DOWN

FACTORY PRE-SET AT 95% FULL FOR ALARM

FUEL CONTAINMENT BASIN: SUB BASE TANK SHALL INCLUDE A WELDED STEEL CONTAINMENT BASIN, SIZED AT A MINIMUM OF 1 I 0% OF THE TANK CAPACITY TO PREVENT ESCAPE OF FUEL INTO THE ENVIRONMENT IN THE EVENT OF A TANK RUPTURE. A FUEL CONTAINMENT BASIN LEAK DETECTOR SWITCH SHALL BE PROVIDED



NOTE:

VERIFY WIRE AND CONDUIT QUANTITY ≰ SIZES WITH GENERATOR MAKE & MODEL # PRIOR TO INSTALLATION. VERIFY ELECTRICAL REQUIREMENTS WITH LOCAL UTILITY PROVIDER.

RESTORE SURFACE TO MATCH ORIGINAL CONDITION

ELECTRICAL CONDUIT(S) WHERE APPLICABLE *

- UNDISTURBED SOIL COMPACTED BACKFILL (SUITABLE ON SITE MATERIAL) 6" WARNING TAPE

> * SEPARATION DIMENSION TO BE VERIFIED WITH LOCAL UTILITY COMPANY REQUIREMENTS

I. PROVIDE PVC CONDUIT BELOW GRADE EXCEPT AS NOTED BELOW. 2. PROVIDE RGS CONDUIT AND ELBOWS AT STUB UP LOCATIONS (I.E. SERVICE POLE, BTS EQUIPMENT, ETC.)

6" TYP

3. INSTALL UTILITY PULLBOXES PER NEC

6"

UTILITY CONDUIT TRENCH SCALE: NTS

STRUCTURAL GENERAL NOTES

- LO GENERAL CONDITIONS
- 1.1 DESIGN & CONSTRUCTION OF ALL WORK SHALL CONFORM TO LOCAL BUILDING CODES, ACI 318-11. IN CASE OF CONFLICT BETWEEN THE CODES, STANDARDS, REGULATIONS, SPECIFICATIONS, GENERAL NOTES AND/OR MANUFACTURER'S REQUIREMENTS USE THE MOST STRINGENT PROVISIONS.
- 1.2 IT IS THE EXPRESS INTENT OF PARTIES INVOLVED IN THIS PROJECT THAT THE CONTRACTOR OR SUBCONTRACTOR OR INDEPENDENT CONTRACTOR OR THE RESPECTIVE EMPLOYEES SHALL EXCULPATE THE ARCHITECT, THE ENGINEER, TECH. CONSTRUCTION MANAGER, THE OWNER, & THEIR AGENTS FROM ANY LIABILITY WHATSOEVER & HOLD THEM HARMLESS AGAINST LOSS, DAMAGES, LIABILITY OR ANY EXPENSE ARISING IN ANY MATTER FROM THE WRONGFUL OR NEGLIGENT ACT, OR FAILURE TO CARRY METHODS, TECHNIQUES OR PROCEDURES OR FAILURE TO CONFORM TO THE STATE SCAFFOLDING ACT IN CONNECTIONS WITH THE WORK.
- 1.3 DO NOT SCALE DRAWINGS
- 1.4 VERIFY ALL EQUIPMENT MOUNTING DIMENSIONS PER MANUFACTURER DRAWINGS
- 1.5 DESIGN LOADS ARE (GENERAC):

LIVE LOAD

FOLJIPMENT SIZE : 889.1" H, 106" W, 38" D

WEIGHT WITH WOODEN SHIPPING SKID

ENCLOSED GENERATOR : 3974 LBS

- 2.0 FOR DESIGN & ANALYSIS OF THE FOUNDATION, THE MINIMUM NET SOIL BEARING CAPACITY SHALL BE ASSUMED TO BE 2000 PSF.
- 3.1 MEET OR EXCEED THE FOLLOWING CODES & STANDARDS:

DESIGN : ACI3 | 8- | | CONSTRUCTION : ACI301

: CRSI MANUAL OF STANDARD PRACTICE DETAILING : ASTM A 615 GRADE 60, DEFORMED REINF. STEEL MIXING : ASTM C 94. READY MIX CONCRETE

AIR ENTRAINMENT : ACI 3 | 8 AND ASTM C-260 AGGREGATE ASTM C 33 AND C 330 (FOR LIGHT WEIGHT)

3.2 CONCRETE STRENGTH AT 28 DAYS SHALL BE 4000 PSI MINIMUM 3.3 DO NOT FIELD BEND OR WELD TO GRADE 60 REINFORCED STEEL

- 3.4 PROVIDE AIR ENTRAINED CONCRETE WITH AIR CONTENT OF 5 TO 7% FOR ALL CONCRETE EXPOSED TO EARTH OR WEATHER.
- 3.5 MAXIMUM AGGREGATE SIZE: 3/4" 3.6 DO NOT USE IN ADMIXTURE, WATER OR OTHER CONSTITUENTS OF CONCRETE WHICH HAS CALCIUM CHLORIDE.
- 3.7 MINIMUM COVER FOR REINFORCING STEEL SHALL BE AS SHOWN ON PLAN.
- 4.0 FOUNDATION \$ EXCAVATION NOTES
- 4.1 SLAB SHALL BE CONSTRUCTED UPON UNDISTURBED, NATURAL SUBGRADE OR COMPACTED GRANULAR FILL WITH AN ASSUMED MINIMUM NET ALLOWABLE BEARING CAPACITY OF 1800 PSF.

 4.2 ALL ORGANIC AND/OR OTHER UNSUITABLE MATERIAL SHALL BE REMOVED FRO FOUNDATION \$ SLAB SUBGRADE \$ BACKFILL AREAS
- \$ THEN BACKFILLED WITH ACCEPTABLE GRANULAR FILL COMPACTED TO 95% OF MAXIMUM DENSITY AT OPTIMUM MOISTURE CONTENT (ASTM D1557)
- 4.3 THE CONTRACTOR SHALL PROVIDE ALL NECESSARY MEASURES TO PREVENT ANY WATER, FROST, OR ICE FROM PENETRATING ANY FOOTING OR STRUCTURAL SUBGRADE BEFORE & AFTER PLACING OF CONCRETE, AND UNTIL SUCH CONCRETE HAS FULLY CURED.



PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensec Professional Engineer under the laws of the State of <u>Connecticut</u>.



FINAL DATE 8/3 1/2020

NEW HARTFORD -SOUTHEAST RD

FA ID # 10091787 70 SOUTHEAST RD

NEW HARTFORD, CT 06057

FOUNDATION DETAILS

SCALE: NONE

48258 S-SHEET


NO.	FROM	ТО	WIRES	GROUND	CONDUIT SIZE	FUNCTION
	NORMAL POWER SOURCE	AUTOMATIC TRANSFER SWITCH	(3) 3/0	(1) #4	2"	NORMAL POWER FEEDER TO ATS (CUT BACK EXISTING)
2	AUTOMATIC TRANSFER SWITCH	LOAD CENTER	(3) 3/0	(1) #4	2"	POWER FEEDER FROM ATS TO PANEL
3	GENERATOR	AUTOMATIC TRANSFER SWITCH	(3) 3/0	(1) #4	2"	EMERGENCY POWER FEEDER TO ATS
4	AUTOMATIC TRANSFER SWITCH	GENERATOR	(2) #10	(1) #10	1 "	START CIRCUIT
5	LOAD CENTER (DISTRIBUTION CENTER)	GENERATOR, ATS	(2) #12 (2) #12 (2) #12	(1) #12 (1) #12 (1) #12	" " "	CIRCUIT FOR GENERATOR BLOCK HEATER \$ BATTERY HEATER CIRCUIT FOR BATTERY CHARGER CIRCUIT FOR AT5
6	GENERATOR	AUTOMATIC TRANSFER SWITCH	I 2-PAIR 24 AWG OR 2EA G-PAIR CAT5	N/A	1"	ALARM CABLES (I) I 2 PAIR 24 AWG. PROVIDE 24" OF SLACK CABLE. FINAL PUNCH DOWN IS BY AT\$T TECH. LABEL ALL WIRES
7	AUTOMATIC TRANSFER SWITCH	ALARM BLOCK	I 2-PAIR 24 AWG OR 2EA G-PAIR CAT5	N/A	1"	ALARM CABLES (1) 12 PAIR 24 AWG (RUN TO PURCELL CABINET & INTO ALARM BOX), PROVIDE 24" OF SLACK CABLE. FINAL PUNCH DOWN IS BY AT&T TECH. LABEL ALL WIRES

CIRCUIT DETAIL

ALARM WIRE IDENTIFICATION CHART

WIRE	ALARM		
BROWN BROWN / WHITE	GENERATOR RUNNING		
GREEN GREEN / WHITE	CRITICAL FAULT		
BLUE BLUE / WHITE	MINOR FAULT		
ORANGE ORANGE / WHITE	LOW FUEL		
BROWN * BROWN / WHITE *	FUEL LEAK		
*CAT5 CABLE ONLY, FROM 2ND CAT5 CABLE			

ALARM WIRING IDENTIFICATION CHART 2

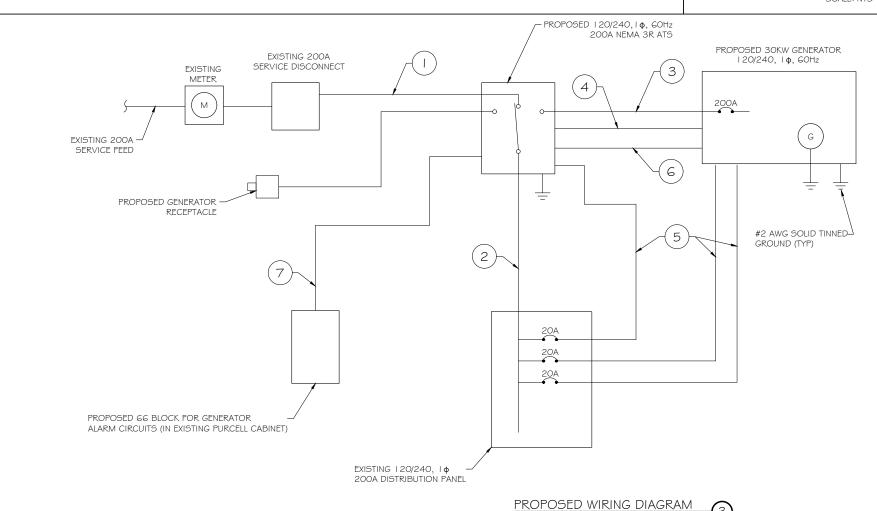



PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

Certification \$ Seal:

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Connecticut.



PHASE FINAL

NEW HARTFORD -SOUTHEAST RD FA ID # 10091787

DATE 8/3 1/2020


170 SOUTHEAST RD NEW HARTFORD, CT 06057


SHEET TITLE:

WIRING DETAILS

SCALE: NONE

PROJECT 48258





- IF EXISTING CONSTRUCTION VARIES FROM THIS DETAIL, AN EQUAL 3-HR U.L. PENETRATION APPROPRIATE FOR THE EXISTING WALL TYPE SHALL BE CONSTRUCTED
- GC SHALL USE NON-SHRINKING CAULK TO WEATHERSEAL ALL PENETRATIONS INTO OR THRU SHELTER WALL.

U.L. SYSTEM NO. C-AJ- I 150 CONDUIT THROUGH BEARING WALL SIMILAR TO U.L. DESIGN NO. U902 F RATING = 3 HRT RATING = O HR

- FLOOR OR WALL ASSEMBLY: MINIMUM 4-1/2" THICK REINFORCED LIGHTWEIGHT OR NORMAL WEIGHT (100-150 PCF) CONCRETE. WALL MAY ALSO BE CONSTRUCTED OF ANY UL CLASSIFIED CONCRETE BLOCKS*. MAX DIAMETER OF OPENING IS 4". SEE CONCRETE BLOCKS 9CATZ) CATEGORY IN THE FIRE RESISTANCE DIRECTORY FOR NAMES OF MANUFACTURERS.
- THROUGH PENETRATIONS: ONE METALLIC PIPE OR CONDUIT TO BE RIGIDLY SUPPORTED ON BOTH SIDES OF FLOOR OR WALL ASSEMBLY. THE ANNULAR SPACE SHALL BE MINIMUM O". (POINT CONTACT) TO MAXIMUM 1-3/8". THE FOLLOWING TYPES AND SIZES OF METALLIC PIPES OR CONDUITS MAY BE USED:
 - A. STEEL PIPE-NOMINAL G" DIAMETER (OR SMALLER) SCHEDULE 40 (OR HEAVIER) STEEL PIPE.
- B. IRON PIPE-NOMINAL 6" DIAMETER (OR SMALLER) CAST OR DUCTILE IRON PIPE. C. CONDUIT - NOMINAL 4" DIAMETER (OR SMALLER) STEEL ELECTRICAL METALLIC TUBING OR NOMINAL 3-1/2" DIAMETER (OR SMALLER) STEEL CONDUIT
- PACKING MATERIAL: MINIMUM 6" THICKNESS OF MIN 4.0 PCF MINERAL WOOL BATTING INSULATION FIRMLY PACKED INTO OPENING AS A PERMANENT FORM. PACKING MATERIAL TO BE RECESSED FROM TOP SURFACE OF FLOOR OR FROM BOTH SURFACES OF WALL AS REQUIRED TO ACCOMMODATE THE REQUIRED THICKNESS OF FILL
- FILL, VOID, OR CAVITY MATERIAL*: SEALANT: MINIMUM 1/4" THICKNESS OF FILL MATERIAL APPLIED WITHIN THE ANNULUS, FLUSH WITH TOP SURFACE OF FLOOR AND WITH BOTH SURFACES OF WALL. AT THE POINT CONTACT LOCATION BETWEEN PIPE AND CONCRETE, A MINIMUM 1/2" DIAMETER BEAD OF FILL MATERIAL SHALL BE APPLIED AT THE CONCRETE/PIPE INTERFACE ON THE TOP SURFACE OF FLOOR AND ON BOTH SURFACES OF WALL. W RATING APPLIES ONLY WHEN CPGO IS OR CPGO 4 SEALANT IS

HILTI CONSTRUCTION CHEMICALS, DIV OF HILTI INC. : CP6015, CP604, CP606, OR FS-ONE

* BEARING THE UL CLASSIFICATION MARK

OUTER WALL PENETRATION DETAIL (IF APPLICABLE)



EXISTING PANEL SCHEDULE

OF DRAWING CREATION.

EXISTING PANEL SCHEDULE INFORMATION WAS NOT AVAILABLE AT THE TIME

SCOPE OF WORK REQUIRES (3) PROPOSED SINGLE POLE, 20A BREAKERS,

ONE EACH FOR CALLOUT NUMBER 5 ON DETAILS 1/E-1 AND 3/E-1. UTILIZE

IF SUFFICIENT SPACES ARE NOT PRESENT IN MAIN PANEL, PROVIDE NEW SUBPANEL FED WITH NEW TWO-POLE, I OOA BREAKER IN MAIN PANELBOARD. RELOCATE EXISTING CIRCUITS TO SUBPANEL WHERE REQUIRED. SQUARE D

EMPTY OR SPARE SPACES ON EXISTING PANELBOARD IF POSSIBLE.

QO LOAD CENTER RECOMMENDED AS NECESSARY.



TOP OF GROUND

EO







THROUGH CABLE

TO SIDE OF

GROUND ROD

Type VV THROUGH VERTICAL CABLE TO VERTICAL STEEL SURFACE OR TO THE SIDE OF EITHER HORIZONTAL OR



HORIZONTAL CABLE HORIZONTAL STEEL CABLE OFF SURFACE.



AND TAP CABLES



NOTE: CONTRACTOR TO LABEL WIRES WITH P-TOUCH OR SIMILAR LABELS ONLY. ABSOLUTELY NO

HANDWRITTEN LABELS.

*CONTRACTOR TO UTILIZE NEXT AVAILABLE IN SEQUENCE SINGLE BREAKER POSITION FOR GENERATOR, BATTERY CHARGER, BATTERY HEATER AND BLOCK HEATER



Type VS CABLE TAP DOWN AT 45°TO VERTICAL HORIZONTAL CABLE TAP TO VERTICAL STEEL STEEL SURFACE OR SIDE OF SURFACE OR THE SIDE OF HORIZONTAL OR HORIZONTAL PIPE VERTICAL PIPE.





CADWELD DETAILS



PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensec Professional Engineer under the laws of the State of <u>Connecticut</u>.



FINAL

DATE 8/3 1/2020

NEW HARTFORD -SOUTHEAST RD FA ID # 10091787

170 SOUTHEAST RD NEW HARTFORD, CT 06057

SHEET TITLE:

PANEL AND PENETRATION DETAILS

SCALE: NONE

48258 SHEET E-2

CONDUIT (TYP) (2)

BUTTERFLY CLAMP AS REQUIRED


(3)


EXISTING WALL/CEILING

VERTICAL "UNISTRUT" PI 000 'T' SERIES LENGTH BASED ON NUMBER OF CONDUIT TO BE MOUNTED

WALL CONSTRUCTION TYPE	USE
HOLLOW	3/8" DIA. TOGGLE BOLT
HOLLOW, AT STUD	3/8" DIA. LAG SCREW
CONCRETE BLOCK (HOLLOW)	3/8" DIA. HILTI HY-20 WITH SCREEN, MINIMUM EMBEDMENT 2-1/2"
CONCRETE (SOLID)	3/8" DIA. HILTI HY-150 WITH SCREEN MINIMUM EMBEDMENT 2-1/2"

NOTE: USE GALVANIZED OR STAINLESS STEEL HARDWARE FOR WALL MOUNT & CONNECTIONS OF CHANNELS SPACE UNITS @ 5'-0" O.C. LENGTH OF RUN

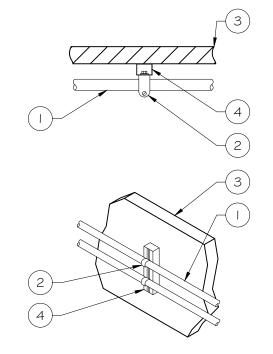



GROUND ROD DETAIL

- GROUND RODS MAY BE: - COPPER CLAD STEEL
- SOLID COPPER GROUND RODS SHALL HAVE A MAXIMUM SPACING TWICE THE LENGTH OF ROD
- 3. SEE RESISTIVITY REPORT FOR VERIFICATION AS AVAILABLE
- A LARGER CONDUCTOR SHALL BE REQUIRED IN AREAS HIGHLY PRONE TO LIGHTNING AND/OR AREAS WITH HIGHLY ACIDIC SOIL
- GROUND RODS INSTALLED WITHIN CLOSE PROXIMITY TO TOWER OR WHEN SOIL IS AT OR BELOW 2,000 OHM-CM, SHALL BE GALVANIZED TO PREVENT GALVANIC CORROSION OF TOWER, (SEE ANSI/TIA-EIA-222-G)
- PROVIDE (I) GROUND LEAD TO EACH SIDE OF THE GENERATOR



(608) 643-4100 www.ramaker.com

PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of <u>Connecticut</u>.



\cup		
MARK	DATE	DESCRIPTION

NEW HARTFORD -SOUTHEAST RD FA ID # 10091787

DATE 8/3 1/2020

170 SOUTHEAST RD NEW HARTFORD, CT 06057

ATS, CONDUIT & GROUND ROD DETAILS


SCALE: NONE


PROJECT NUMBER	48258
SHEET NUMBER	E-3

CONDUIT WALL MOUNT

WALL CONSTRUCTION TYPE	USE
HOLLOW	3/8" DIA. TOGGLE BOLT
HOLLOW, AT STUD	3/8" DIA. LAG SCREW
CONCRETE BLOCK (HOLLOW)	7/16" DIA. HILTI HY-20 WITH SCREEN MINIMUM EMBEDMENT 2-1/2"
CONCRETE (SOLID)	7/16" DIA. HILTI HY-150 WITH SCREEN MINIMUM EMBEDMENT 2-1/2"

- USE GALVANIZED OR STAINLESS STEEL HARDWARE FOR WALL MOUNT AND CONNECTION OF CHANNELS
- 2. GC SHALL USE NON-SHRINKING CAULK TO WEATHER SEAL ALL PENETRATIONS INTO OR THROUGH SHELTER WALL

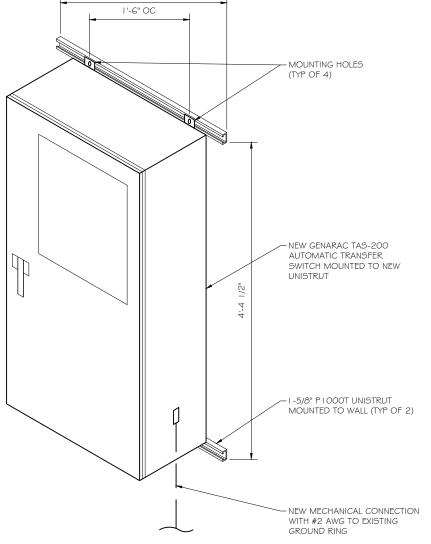

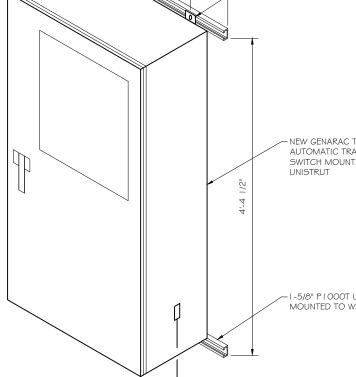

2'-6"

GENERAC ATS MOUNTING DETAIL

DATE 8/3 1/2020

SD030 | 2.2L | 30 kW

GENERAC* INDUSTRIAL

EPA Certified Stationary Emergency

Standby Power Rating 30 kW, 38 kVA, 60 Hz

Prime Power Rating* 27 kW, 34 kVA, 60 Hz

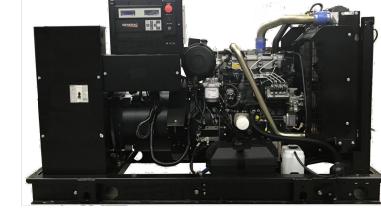


Image used for illustration purposes only

Codes and Standards

Not all codes and standards apply to all configurations. Contact factory for details.



UL2200, UL508, UL489, UL142



CSA C22.2



BS5514 and DIN 6271



SAE J1349



NFPA 37, 70, 99, 110



NEC700, 701, 702, 708



ISO 3046, 7637, 8528, 9001



NEMA ICS10, MG1, 250, ICS6, AB1

ANSI

ANSI C62.41

Powering Ahead

For over 50 years, Generac has provided innovative design and superior manufacturing.

Generac ensures superior quality by designing and manufacturing most of its generator components, including alternators, enclosures and base tanks, control systems and communications software.

Generac gensets utilize a wide variety of options, configurations and arrangements, allowing us to meet the standby power needs of practically every application.

Generac searched globally to ensure the most reliable engines power our generators. We choose only engines that have already been proven in heavy-duty industrial applications under adverse conditions.

Generac is committed to ensuring our customers' service support continues after their generator purchase.

SD030 | 2.2L | 30 kW INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency

STANDARD FEATURES

ENGINE SYSTEM

- Oil Drain Extension
- Air Cleaner Fan Guard
- Stainless Steel Flexible Exhaust Connectio
- · Factory Filled Oil and Coolant
- Radiator Duct Adapter (Open Set Only)
- Critical Silencer (Enclosed Unit Only)

· Engine Coolant Heater

- Fuel Lockoff Solenoid
- Primary Fuel Filter

Cooling System

Fuel System

- Closed Coolant Recovery System
- UV/Ozone Resistant Hoses · Factory-Installed Radiator
- Radiator Drain Extension
- 50/50 Ethylene Glycol Antifreeze

Electrical System

· Battery Charging Alternator Battery Cables

CONTROL SYSTEM

- Battery Tray
- Rubber-Booted Engine Electrical Connections
- · Solenoid Activated Starter Motor

ALTERNATOR SYSTEM

- UL2200 GENprotect[™]
- Class H Insulation Material
- 2/3 Pitch
- Skewed Stator
- Brushless Excitation Sealed Bearing
- · Rotor Dynamically Spin Balanced
- Amortisseur Winding (3-Phase Only)
- Full Load Capacity Alternator · Protective Thermal Switch

GENERATOR SET

- Internal Genset Vibration Isolation
- Separation of Circuits High/Low Voltage
- Separation of Circuits Multiple Breakers
- Wrapped Exhaust Piping
- · Standard Factory Testing
- 2 Year Limited Warranty (Standby Rated Units)
- 1 Year Limited Warranty (Prime Rated Units)
- Silencer Mounted in the Discharge Hood (Enclosed Unit Only)

ENCLOSURE (If Selected)

Rust-Proof Fasteners with Nylon Washers to

GENERAC | INDUSTRIAL

- High Performance Sound-Absorbing Material (Sound Attenuation Enclosures)
- Gasketed Doors
- · Stamped Air-Intake Louvers
- Upward Facing Discharge Hoods (Radiator and Exhaust
- Stainless Steel Lift Off Door Hinges
- Stainless Steel Lockable Handles

RhinoCoat™ - Textured Polyester Powder Coat Paint

- **FUEL TANKS (If Selected)** UL 142/ULC S601
- Double Wall
- · Normal and Emergency Vents
- Sloped Top
- Sloped Bottom
- Factory Pressure Tested Rupture Basin Alarm
- Fuel Level
- Check Valve In Supply and Return Lines
- RhinoCoat™ Textured Polvester Powder Coat Paint
- Stainless Steel Hardware

- · Audible Alarms and Shutdowns Not in Auto (Flashing Light)
- · Auto/Off/Manual Switch
- E-Stop (Red Mushroom-Type) NFPA110 Level I and II (Programmable)
- Customizable Alarms, Warnings, and Events
- Modbus[®] Protocol
- · Predictive Maintenance Algorithm
- Sealed Boards
- Password Parameter Adjustment Protection
- Single Point Ground
- 16 Channel Remote Trending • 0.2 msec High Speed Remote Trending
- · Alarm Information Automatically Annunciated
- on the Display

- Power Factor
- Real/Reactive/Apparent Power
- All Phase Currents

- Oil Pressure
- Coolant Temperature
- Coolant Level Engine Speed
- Battery Voltage
- Frequency

Alarms and Warnings

- Oil Pressure
- Coolant Temperature
- Coolant Level Engine Overspeed
- Battery Voltage
- Alarms and Warnings Time and Date Stamped
- Snap Shots of Key Operation Parameters During Alarms and Warnings
- Alarms and Warnings Spelled Out (No Alarm Codes)

(608) 643-4100 www.ramaker.com PREPARED FOR:



RAMAKER

CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc. **GENERAL DYNAMICS** 661 MOORE RD STE 110

KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was prepar by me or under my direct supervision and that I am a duly License Professional Engineer under the laws of the State of Connecticut



NEW HARTFORD -SOUTHEAST RD FA ID # 10091787

70 SOUTHEAST RD NEW HARTFORD, CT 06057

GENERAC 30KW GENERATOR **SPECIFICATIONS**

SCALE: NONE

48258 SHEET E-4

· Programmable Crank Limiter • 7-Day Programmable Exerciser

Program Functions

Digital H Control Panel- Dual 4x20 Display

- · All Phase Sensing Digital Voltage Regulator
- · 2-Wire Start Capability
- Waterproof/Sealed Connectors
- Date/Time Fault History (Event Log)
- Isochronous Governor Control

• RS-232/485 Communications

Full System Status Display

- Power Output (kW)
- · kW Hours, Total, and Last Run
- All Phase AC Voltage

GENERAC* INDUSTRIAL

SD030 | 2.2L | 30 kW INDUSTRIAL DIESEL GENERATOR SET

GENERAC INDUSTRIAL

Cooling System

Fan Diameter - in (mm)

Fuel Supply Line - in (mm)

Fuel Return Line - in (mm)

EPA Certified Stationary Emergency

APPLICATION AND ENGINEERING DATA

ENGINE SPECIFICATIONS

General		
Make	Perkins	
EPA Emissions Compliance	Stationary Emergency	
EPA Emissions Reference	See Emission Data Sheet	
Cylinder #	4	
Туре	In-Line	
Displacement - in ³ (L)	135 (2.22)	
Bore - in (mm)	3.3 (84)	
Stroke - in (mm)	3.9 (100)	
Compression Ratio	23.3:1	
Intake Air Method	Turbocharged	
Cylinder Head	Cast Iron	

Engine	Governing

Piston Type

Crankshaft Type

Governor	Electronic Isochronous	
Frequency Regulation (Steady State)	±0.5%	
Lubrication System		
Oil Pump Type	Gear	
Oil Filter Type	Full-Flow	
Crankcase Capacity - qt (L)	11.2 (10.6)	

Aluminum

Forged Steel

Cooling System Type Closed Recovery Pre-Lubed, Self Sealing Water Pump Type Fan Type Pusher Fan Speed - RPM 1.980

Fuel System	
Fuel Type	Ultra Low Sulfur Diesel Fuel #2
Fuel Specifications	ASTM
Fuel Filtering (Microns)	5
Fuel Inject Pump	Distribution Injection Pump
Fuel Pump Type	Engine Driven Gear
Injector Type	Mechanical

18 (457)

0.31 (7.9) ID

0.2 (4.8) ID

ngine Electrical System	
ystem Voltage	12 VDC
attery Charger Alternator	Standard
attery Size	See Battery Index 0161970SBY
attery Voltage	12 VDC
round Polarity	Negative

)	NFPA 110 Compliant 21-Light Remote	Annunciator

O	Remot	e Ke	iay As	semb	11y (8 0	r 16)		
0	Oil Ter	nper	ature I	ndica	tion an	d Aları	m	
	_					_	_	

-	on remperature marcanem and ruarm
0	Remote E-Stop (Break Glass-Type, Surface Mount
\circ	Damoto E Ston (Dad Muchroom Type

0					ed Mu	ıshro	om-Type,	
	Surrac	ce	Mount	.)				
_	_			-			_	

 Remote E-Stop (Red Mushroom-Type, Flush Mount 	0	Remote E-Stop	(Red Mushroom-Type,	Flush Mount)
---	---	---------------	---------------------	--------------

0	100 dB Alarm Horn
0	Ground Fault Annunciation

CONTROL SYSTEM

- O 120V GFCI and 240V Outlets
- O Remote Communication Modem O 10A Engine Run Relay

FUEL TANKS (Size On Last Page)

- O 8 in (203.2 mm) Fill Extension
- O 13 in (330.2 mm) Fill Extension
- O 19 in (482.6 mm) Fill Extension
- Overfill Protection Valve
- O 5 Gallon Spill Box Return Hose
- O 5 Gallon Spill Box
- Tank Risers
- O Fuel Level Switch and Alarm
- 12' Vent System
- O Fire Rated Stainless Steel Fuel Hose

ENGINEERED OPTIONS

SD030 | 2.2L | 30 kW

EPA Certified Stationary Emergency

CONFIGURABLE OPTIONS

O Critical Silencer (Open Set Only)

O Level 1 Fan and Belt Guards (Open Set Only)

ENGINE SYSTEM

O Radiator Stone Guard

O NPT Flexible Fuel Line

ELECTRICAL SYSTEM

ALTERNATOR SYSTEM

O Anti-Condensation Heater

Extended Factory Testing

O 8 Position Load Center

O Pad Vibration Isolation

O Permanent Magnet Excitation

O 10A UL Listed Battery Charger

FUEL SYSTEM

Battery Warmer

Alternator Upsizing

Tropical Coating

GENERATOR SET

Oil Heater

INDUSTRIAL DIESEL GENERATOR SET

ENGINE SYSTEM

- O Coolant Heater Isolation Ball Valves
- O Fluid Containment Pan

CONTROL SYSTEM

- O Spare Inputs (x4) / Outputs (x4) O Battery Disconnect Switch
- O 3rd Breaker System

GENERATOR SET

Special Testing

ALTERNATOR SYSTEM

CIRCUIT BREAKER OPTIONS

Main Line Circuit Breaker

Electronic Trip Breakers

ENCLOSURE

Steel Enclosure

Aluminum Enclosure

for Availability)

O Door Alarm Switch

O Damper Alarm Contacts

O 5 Year Limited Warranty

Enclosure Heater

O 2nd Main Line Circuit Breaker

Weather Protected Enclosure

Level 1 Sound Attenuation

Level 2 Sound Attenuation

AC/DC Enclosure Lighting Kit

Level 2 Sound Attenuation with Motorized Dampers

O Up to 200 MPH Wind Load Rating (Contact Factory

WARRANTY (Standby Gensets Only)

2 Year Extended Limited Warranty

O 5 Year Extended Limited Warranty

O 7 Year Extended Limited Warranty 10 Year Extended Limited Warranty

O Shunt Trip and Auxiliary Contact

FUEL TANKS

- O UL2085 Tank
- Stainless Steel Tanks
- Special Fuel Tanks
- Vent Extensions

ALTERNATOR SPECIFICATIONS

Standard Model	K0035124Y21	
Poles	4	
Field Type	Revolving	
Insulation Class - Rotor	Н	
Insulation Class - Stator	Н	
Total Harmonic Distortion	<5% (3-Phase)	
Telephone Interference Factor (TIF)	< 50	

Standard Excitation	Brushless		
Bearings	Single Sealed		
Coupling	Direct via Flexible Disc		
Load Capacity - Standby	100%		
Prototype Short Circuit Test	Yes		
Voltage Regulator Type	Digital		
Number of Sensed Phases	All		
Regulation Accuracy (Steady State)	÷0.25%		



PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensec Professional Engineer under the laws of the State of <u>Connecticut</u>.



NEW HARTFORD -SOUTHEAST RD FA ID # 10091787

70 SOUTHEAST RD 4 of 6 NEW HARTFORD, CT 06057

GENERAC 30KW GENERATOR **SPECIFICATIONS**

SCALE: NONE

48258 E-4. SHEET

GENERAC 30KW GENERATOR SPECIFICATIONS SCALE: NTS

DATE 8/3 1/2020

SD030 | 2.2L | 30 kW INDUSTRIAL DIESEL GENERATOR SET GENERAC INDUSTRIAL

EPA Certified Stationary Emergency

OPERATING DATA

POWER RATINGS

		Standby
Single-Phase 120/240 VAC @1.0pf	30 kW	Amps: 125
Three-Phase 120/208 VAC @0.8pf	30 kW	Amps: 104
Three-Phase 120/240 VAC @0.8pf	30 kW	Amps: 90
Three-Phase 277/480 VAC @0.8pf	30 kW	Amps: 45
Three-Phase 346/600 VAC @0.8pf	30 kW	Amps: 36

MOTOR STARTING CAPABILITIES (skVA)

skVA vs. Voltage Dip

277/480 VAC	30%	208/240 VAC	309
K0035124Y21	61	K0035124Y21	46
K0040124Y21	76	K0040124Y21	58
K0050124V21	98	K0050124V21	75

FUEL CONSUMPTION RATES*

	Diesei -	- gpn (Lpn)	
Fuel Pump Lift- ft (m)	Percent Load	Standby	
3 (1)	25%	1.0 (3.7)	
	50%	1.4 (5.2)	
Total Fuel Pump Flow (Combustion + Return) - gph (Lph)	75%	2.0 (7.5)	Π
16.6 (63)	100%	2.8 (10.5)	
	* Fuel supply installation m	ust accommodate fuel	

consumption rates at 100% load.

COOLING

	Standby
gpm (Lpm)	14.9 (56.2)
gal (L)	2.5 (9.5)
BTU/hr (kW)	128,638 (136)
scfm (m³/hr)	2,800 (4,757)
°F (°C)	122 (50)
See Bulletin	No. 0199280SSD
in H ₂ O (kPa)	0.5 (0.12)
	in H ₂ O (kPa)

COMBUSTION AIR REQUIREMENTS

Flow at Rated Power scfm (m3/min)

ENGINE	EXHAUST

		Standby			Standby
Rated Engine Speed	RPM	1,800	Exhaust Flow (Rated Output)	scfm (m³/min)	296.6 (8.4)
Horsepower at Rated kW**	hp	49	Max. Allowable Backpressure (Post Turbocharger)	inHg (kPa)	1.5 (5.1)
Piston Speed	ft/min (m/min)	1,181 (360)	Exhaust Temp (Rated Output)	°F (°C)	892 (478)
BMEP	psi (kPa)	159 (1,096)			


^{**} Refer to "Emissions Data Sheet" for maximum bHP for EPA and SCAQMD permitting purposes.

Deration – Operational characteristics consider maximum ambient conditions. Derate factors may apply under atypical site conditions. Please contact a Generac Power Systems Industrial Dealer for additional details. All performance ratings in accordance with ISO3046, BS5514, ISO8528, and DIN6271 standards. Prime - See Bulletin 0187510SSB

SD030 | 2.2L | 30 kW INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency

DIMENSIONS AND WEIGHTS*






OPEN SET (Includes Exhaust Flex)

- Hours	- Gal (L)	LX WX II - III (IIIII)	- lbs (kg)
No Tank	-	76.0 (1,930) x 37.4 (950) x 44.8 (1,138)	1,641 (745)
19	54 (204)	76.0 (1,930) x 37.4 (950) x 57.8 (1,468)	2,121 (963)
47	132 (501)	76.0 (1,930) x 37.4 (950) x 69.8 (1,773)	2,351 (1,067)
75	211 (799)	76.0 (1,930) x 37.4 (950) x 81.8 (2,078)	2,560 (1,162)
107	300 (1,136)	92.9 (2,360) x 37.4 (950) x 81.8 (2,078)	2,623 (1,190)

GENERAC INDUSTRIAL


Weight






WEATHER PROTECTED ENCLOSURE

Run Time	Usable Capacity	L x W x H - in (mm)		: - Ibs (kg) sure Only
- Hours	- Gal (L)		Steel	Aluminum
No Tank	-	94.8 (2,409) x 38.0 (965) x 49.5 (1,258)		
19	54 (204)	94.8 (2,409) x 38.0 (965) x 62.5 (1,588)	070	0.44
47	132 (501)	94.8 (2,409) x 38.0 (965) x 74.5 (1,893)	- 372 - (170)	241 (110)
75	211 (799)	94.8 (2,409) x 38.0 (965) x 86.5 (2,198)	(170)	(110)
107	300 (1,136)	94.8 (2,409) x 38.0 (965) x 86.5 (2,198)	-	



LEVEL 1 ACOUSTIC ENCLOSURE

Run Time	Usable Capacity	L x W x H - in (mm)		t - Ibs (kg) sure Only
- Hours	- Gal (L)		Steel	Aluminum
No Tank	-	112.5 (2,857) x 38.0 (965) x 49.5 (1,258)		
19	54 (204)	112.5 (2,857) x 38.0 (965) x 62.5 (1,582)	-	000
47	132 (501)	112.5 (2,857) x 38.0 (965) x 74.5 (1,893)	505 (230)	338 (154)
75	211 (799)	112.5 (2,857) x 38.0 (965) x 86.5 (2,198)	(200)	(104)
107	300 (1,136)	112.5 (2,857) x 38.0 (965) x 86.5 (2,198)	-	





LEVEL 2 ACOUSTIC ENCLOSURE

Run Time	Usable Capacity	L x W x H - in (mm)		- Ibs (kg) ure Only
- Hours	- Gal (L)		Steel	Aluminum
No Tank	-	94.8 (2,407) x 38.0 (965) x 61.1 (1,551)		
19	54 (204)	94.8 (2,407) x 38.0 (965) x 74.1 (1,881)	540	044
47	132 (501)	94.8 (2,407) x 38.0 (965) x 86.1 (2,186)	510 (232)	341 (155)
75	211 (799)	94.8 (2,407) x 38.0 (965) x 98.1 (2,491)	(202)	(100)
107	300 (1,136)	94.8 (2,407) x 38.0 (965) x 98.1 (2,491)		

* All measurements are approximate and for estimation purposes only. Specification characteristics may change without notice. Please contact a Generac Power Systems Industrial Dealer for detailed installation drawings

Generac Power Systems, Inc. | P.O. Box 8 | Waukesha, WI 53189 P: (262) 544-4811 ©2018 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice.

Part No. 10000024842 Rev. B 08/27/18 RAMAKER (608) 643-4100 www.ramaker.com

PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was prepar by me or under my direct supervision and that I am a duly License Professional Engineer under the laws of the State of Connecticut



DATE 8/3 1/2020

NEW HARTFORD -SOUTHEAST RD FA ID # 10091787

170 SOUTHEAST RD 6 of 6 NEW HARTFORD, CT 06057

GENERAC 30KW GENERATOR SPECIFICATIONS

SCALE: NONE

48258 E-4.2

GENERAC 30KW GENERATOR SPECIFICATIONS SCALE: NTS



TTS Series Switches 200 Amps 600 VAC



TAS200 TAS200

200A Automatic Transfer Switch

TAS200

1 of 3 2 of 3

The Generac TAS200 Automatic Transfer Switch

Flexibility for multiple application installations

Multiple generator support with 3 source panel

Designed with a 6 inch touch screen controller for improved user interface

Camlock functionality for mobile generator sources



Image used for illustration purposes only.

Features

- STEEL CONSTRUCTION
- NEMA 3R ENCLOSURE WITH HINGED "PADLOCKING" DOORS
- STAINLESS STEEL HARDWARE
- CAMLOCK "QUICK CONNECT" CAPABILITY
- OPERATIONAL STATUS VIEW VIA **6 INCH TOUCH SCREEN**
- TEST FUNCTION FAST TEST & NORMAL TEST
- UL1008 LISTED FOR EMERGENCY SYSTEMS

Optional Features

- EXTENDED WARRANTY
- THREE-PHASE VOLTAGE CONFIGURATIONS

Codes and Standards

Generac products are designed to the following



UL1008, UL508, UL50. CSA C22.2 No. 178



NEC 700, 701 and 702



NEMA 250

Application and Engineering Data

Dimensions	24"W x 12"D x 48"H
Weight	210 lbs.
	Single Chamber with Main Door
	Steel
	UL Type / NEMA 3R Rated
Construction	Powder Coat Finish for Corrosion Resistance
	C-UL-US Listed - Automatic Transfer Switch
	Stainless Steel Hardware
	3-Point Latching System with Pad-Lockable Handles
Mounting Options	Wall
Mounting Options	H-frame
Installed	Pre-wired alarm terminal strip

Electrical Specifications	
Voltage/Phase/Amps	120/240 Single-Phase, 200A 120/208 3-Phase, 200A 120/240 3-Phase, 200A
Breaker	Eaton 200 amp Utility Breaker
Dieakei	Eaton 200 amp Generator Breaker
Maximum RMS Symmetrical Fault Current - Amps	25k AIC Rated
Protective Device Continuous Rating (Max) Amp	200
Input to Generator	350MCM - #6 AWG
Output to Site	350MCM - #6 AWG
Generator Annunciator Connector	Deutsch DTM04-12PA-L012
	Generator Run Alarm
	Generator Fail – Shutdown Alarm
Alassa Tassainal Daard	Generator Fail – Non Shutdown Alarm
Alarm Terminal Board	Low Fuel Alarm
	Generator Theft Alarm
	AC Utility Fail Alarm

Camlock Component				
Camlock Component	Shipped loose for multiple installation options			
Dimensions	9" W x 9.4" D x 24.25" H	GENERAC		
200A Camlock Generator Connection	Single-Phase: Black L1, Red L2, White-Neutral, Green-Ground			
	3-Phase: Black L1, Red L2, Blue L3, White-Neutral, Green-Ground			
	Uses 4 CH E1016 Male Connectors			
	Mating Connector – CH E1016 Female			



PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was by me or under my direct supervision and that I am a duly l Professional Engineer under the laws of the State of <u>Conn</u>



DATE 8/3 1/2020

NEW HARTFORD -SOUTHEAST RD FA ID # 10091787

170 SOUTHEAST RD NEW HARTFORD, CT 06057

GENERAC ATS SPECIFICATIONS

SCALE: NONE

48258 E-5 SHEET



Touch Screen Interface





INDICATORS AND BUTTONS

- · System Ready indicator
- Standby Operating indicator
- Utility Available indicator
- GEN/UTIL Switch Position indicator
- · TVSS status

- Normal Test button
- Fast Test button
- Return to Normal button
- Reset button
- · Exercising indicator

DETAILS SCREEN

System Settings:

- · System Voltage/Phases:
- 120/240V single phase (standard)
- 120/208V three phase (optional)
- 120/240V three phase (optional)
- Utility Fail Monitor:
- Under Voltage: 75-95% of nominal voltage
- Over Voltage: 105%-125% of nominal voltage
- Pickup (hysteresis): fixed at 5 volts
- Delay time: 0-60s
- Utility Interrupt Delay: 0-60s
- Return to Utility Timer: 1-30 minutes
- Transfer:
- In-phase, or
- Time-Delay-Neutral at 0.0-10.0s in 1 second increments

Engine Settings:

- Engine Warm-up timer: 0-20 minutes
- Generator Load Accept:
- Time-Delay-Neutral at 0.0-10.0s in 1 second increments
- Voltage: 85-95% of nominal
- Frequency: 85-95% of nominal
- Engine Minimum Run Timer: 5-30 minutes
- Engine Cooldown Timer: 0-20 minutes

Exercise Settings:

- Time of day
- · Day of week
- Exercise:
- Exercise with/without load
- Exercise once every 1, 2, or 4 weeks.
- Exercise time-of-day
- Exercise day of week
- Exercise duration: 15-30 minutes

Screen Settings:

- · Brightness & Contrast button
- Screen Calibration button
- Startup/Clean screen

Diagnostics:

- Digital I/O bits status
- Voltage A/D readings

Mimic Diagram:

- System Ready
- Transfer switch position
- Utility available
- Standby available
- Maintenance/Auto switch position
- Generator source TS position
- TVSS status

Generac Power Systems, Inc. • S45 W29290 HWY. 59, Waukesha, WI 53189 • generac.com @2013 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice. Bulletin 0195670SBY-B / Printed in U.S.A. 03/13/13



PREPARED FOR:



CONSULTANT:


GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensec Professional Engineer under the laws of the State of <u>Connecticut</u>.





DATE 8/3 1/2020

NEW HARTFORD -SOUTHEAST RD FA ID # 10091787

170 SOUTHEAST RD NEW HARTFORD, CT 06057

GENERAC ATS SPECIFICATIONS

SCALE: NONE

48258 PROJECT NUMBER SHEET E-5.1



Property Listing Report

Map Block Lot

034-012-06A Bldg # **1** Sec #

1 PID 184846 Account

06007431

Property Information

Property Location	47 GARRETT RIDGE COURT				
Owner	SBA TOWERS II LLC				
Co-Owner	na				
Mailing Address	8051 CONGRESS AVENUE				
	BOCA RATON FL 33487				
Land Use	3900 COM VACANT				
Land Class	С				
Zoning Code	R2				
Census Tract					

Neighborhood	80
Acreage	0.4
Utilities	UNKNOWN
Lot Setting/Desc	UNKNOWN UNKNOW
Book / Page	0305/0876
Fire District	4

Primary Construction Details

0
COM VACANT
UNKNOWN
NA
NA
NA

Heating Fuel	
Heating Type	
AC Type	
Bedrooms	0
Full Bathrooms	0
Half Bathrooms	0
Extra Fixtures	0
Total Rooms	0
Bath Style	NA
Kitchen Style	NA
Fin Bsmt Area	
Fin Bsmt Quality	
Bsmt Gar	
Fireplaces	

Photo



Sketch



(*Industrial / Commercial Details)

Building Use	Vacant
Building Condition	
Sprinkler %	NA
Heat / AC	NA
Frame Type	NA
Baths / Plumbing	NA
Ceiling / Wall	NA
Rooms / Prtns	NA
Wall Height	NA
First Floor Use	NA
Foundation	NA

Report Created On

12/8/2020

Town of New Hartford, CT

Property Listing Report


Map Block Lot

034-012-06A Bldg # **1** Sec #

1 PID 184846 Account

06007431

	nmary (Assessed value = 70% of Appraised Value)		Sub Areas				
Item	Appraised		Assessed	Subarea Ty	pe	Gross Area (sq ft)	Living Area (sq f
Buildings	0		0				
Extras	0		0				
Improvements							
Outbuildings	22800		15960				
Land	324000		226800				
Гotal	346800		242760				
Outbuilding ar	nd Extra F	eatures					
Type Description		on					
Shed - Masonry 330 S.F.							
PreCast Conc 228 S.F.							
				Total Area			0
Sales History		<u> </u>		'		1	•
Owner of Record				Book/ Page	Sale Date	e Sale Pr	ice
SBA TOWERS II LLO				0305/0876	2020-06-	30 958500)
MIANO PAUL M EST	TATE OF			0290/0588	2016-06-	15 0	

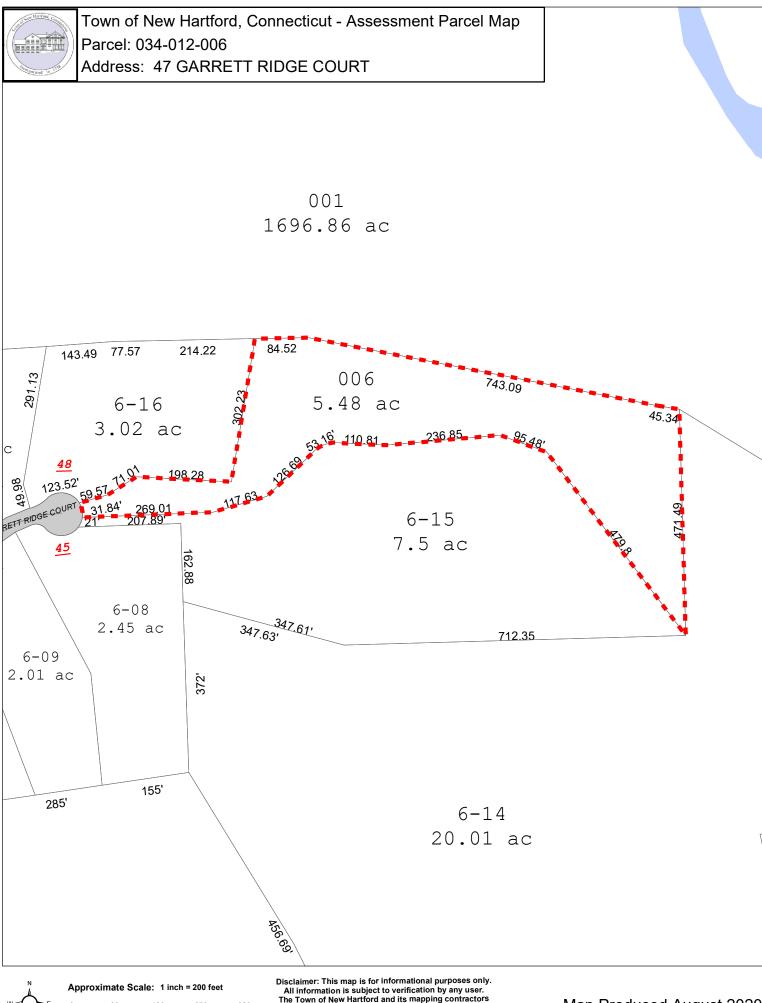

ATTACHMENT 2



TOWN OF NEW HARTFORD 530 MAIN STREET - TOWN HALL NEW HARTFORD, CT 06057

Land Use Office 530 Main Street New Hartford, CT 06057 Phone: (860) 379-7677 Fax: (860) 379-0940 www.newhartfordct.gov

February 4, 2020

Memorandum RE: 170 Southeast Rd / 47 Garrett Ridge Court

Dear Garrett,

This letter confirms there is no other Zoning Decisions that have not gone through the CSC for the above property.

Regards,

Michael Lucas

Land Use Administrator / ZEO

Town of New Hartford

ATTACHMENT 3

CERTIFICATION

I hereby certify that on the <u>11th</u> day of <u>December</u>, 2020, a copy of AT&T's Exempt Modification Request to the Connecticut Siting Council was sent by electronic mail to the chief elected official and the planning and zoning department of the municipality in which the facility is located as well as by first class mail to the property owner and tower/facility owner.

Dated: December 11, 2020

Cuddy & Feder LLP

445 Hamilton Avenue, Floor 14

White Plains, NY 10601

Attorneys for:

New Cingular Wireless PCS, LLC (AT&T)