



Northeast Site Solutions
Denise Sabo
199 Brickyard Rd Farmington, CT 06032
860-209-4690
denise@northeastsitesolutions.com

September 16, 2016

Members of the Siting Council
Connecticut Siting Council
Ten Franklin Square
New Britain, CT 06051

RE: Notice of Exempt Modification
2 Willruss Street, Pole 1102 Line 1880, Norwalk CT 06850
Latitude: 41.12576
Longitude: -73.43270
T-Mobile Site#: CT11356C_L1900

Dear Ms. Bachman:

T-Mobile currently maintains six (6) antennas at the 114-foot level of the existing 94-foot utility tower at 2 Willruss Street, Pole 1102 Line 1880, Norwalk CT 06850. The tower is owned by CL&P d/b/a Eversource Energy. The property is owned by CT Light and Power Company c/o Eversource. T-Mobile now intends to replace three (3) of its existing antennas with three (3) new 700/1900/2100 MHz antenna and add (18) Coax cable. The new antennas would be installed at the 114-foot level of the tower.

Planned Modifications:

Remove: NONE

Remove and Replace:

Commscope LNX-6512DS Antenna (**REMOVE**) - (3)Commscope RV4PX306R (Penta) Antenna (**REPLACE**)

Install New: (18) 1-1/4" Coax Cable

(3) RRUS32 B4 (Ground mounted on New H-Frame)

Existing to Remain:

(3)APX16DWV-16DWV-SE-A20

(18) 1-1/4" Coax

This facility was approved by the Connecticut Siting Council. Petition No.446 – Approval to modify the existing transmission tower for telecommunication use. Please see attached.



NSS **NORTHEAST**
SITE SOLUTIONS
Turnkey Wireless Development

Please accept this letter as notification pursuant to Regulations of Connecticut State Agencies § 16- SOj-73, for construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-72(b)(2). In accordance with R.C.S.A. § 16-SOj-73, a copy of this letter is being sent to Mayor Harry W. Rilling, Elected Official for the City of Norwalk, as well as the property owner and the tower owner.

The planned modifications to the facility fall squarely within those activities explicitly provided for in R.C.S.A. § 16-50j-72(b)(2).

1. The proposed modifications will not result in an increase in the height of the existing structure.
2. The proposed modifications will not require the extension of the site boundary.
3. The proposed modifications will not increase noise levels at the facility by six decibels or more, or to levels that exceed state and local criteria.
4. The operation of the replacement antennas will not increase radio frequency emissions at the facility to a level at or above the Federal Communications Commission safety standard.
5. The proposed modifications will not cause a change or alteration in the physical or environmental characteristics of the site.
6. The existing structure and its foundation can support the proposed loading.

For the foregoing reasons, T-Mobile respectfully submits that the proposed modifications to the above referenced telecommunications facility constitute an exempt modification under R.C.S.A. § 16-50j-72(b)(2).

Sincerely,

Denise Sabo

Mobile: 860-209-4690

Fax: 413-521-0558

Office: 199 Brickyard Rd, Farmington, CT 06032

Email: denise@northeastsitesolutions.com

Attachments:

cc: Harry W. Rilling- Mayor- as elected official

Eversource - as tower owner

CT Light & Power Co c/o Eversource - as property owner

Exhibit A

Petition No. 446
AT&T Wireless PCS, Inc.
Staff Report
April 12, 2000

On March 8, 2000, Connecticut Siting Council (Council) member Gerald J. Heffernan, and Fred Cunliffe of Council staff met AT&T Wireless PCS (AT&T) representatives Michael Murphy and Daniel Garber and Michael Austin of Pinnacle Site Development for inspection of a Connecticut Light & Power Company (CL&P) electric transmission line structure (no. 1102) located off Willruss Court in Norwalk. AT&T, with the agreement of CL&P, proposes to modify the transmission structure for telecommunications use and is petitioning the Council for a declaratory ruling that no Certificate of Environmental Compatibility and Public Need (Certificate) is required for the modification.

AT&T proposes to attach an 8.6-inch diameter pipe extending the existing structure height of 94 feet by 12 feet for a total height of 106 feet. AT&T proposes a low profile antenna cluster mount at the top of the pipe and placing associated equipment cabinets on a steel frame within the base of the existing structure. The proposed site is on property owned by CL&P within an urban setting consisting primarily of residential homes. Eight residences are within approximately 200 feet of the proposed site. Buffers of vegetation exist on both sides of the right-of-way.

Minor clearing of vegetation and debris is expected both for the site and to improve an existing access from Willruss Court to the structure. A 30 ft. by 40 ft., 8-foot high chain link fence would surround the structure. Utilities would be routed underground within the access drive approximately 100 feet from an existing utility pole to the site.

The worst case power density for the telecommunications operations at the site has been calculated to be less than 2.6% of the applicable standard for uncontrolled environments. AT&T contends that the proposed installation will not cause a substantial adverse environmental effect, and for this reason would not require a Certificate.

Exhibit B

29 WILLRUSS CT

Location 29 WILLRUSS CT

Mblu 5/ 56/ 152/ 0/

Acct# 19010

Owner CONN LIGHT * POWER CO

Assessment \$160,490

Appraisal \$229,270

PID 19010

Building Count 1

Assessing Distri...

Current Value

| Appraisal | | | |
|----------------|--------------|-----------|-----------|
| Valuation Year | Improvements | Land | Total |
| 2015 | \$0 | \$229,270 | \$229,270 |

| Assessment | | | |
|----------------|--------------|-----------|-----------|
| Valuation Year | Improvements | Land | Total |
| 2015 | \$0 | \$160,490 | \$160,490 |

Owner of Record

Owner CONN LIGHT * POWER CO

Sale Price \$0

Co-Owner ATTN TAX DIVISION

Certificate

Address 107 SELDEN ST

Book & Page 279/372

BERLIN, CT 06037-0000

Sale Date 12/31/1940

Ownership History

| Ownership History | | | | |
|-----------------------|------------|-------------|-------------|------------|
| Owner | Sale Price | Certificate | Book & Page | Sale Date |
| CONN LIGHT * POWER CO | \$0 | | 279/372 | 12/31/1940 |

Building Information

Building 1 : Section 1

Year Built:

Living Area: 0

Replacement Cost: \$0

Building Percent

Good:

Replacement Cost

Less Depreciation: \$0

Building Attributes


| Field | Description |
|-------------------|-------------|
| Style | Vacant Land |
| Stories | |
| Occupancy | |
| Exterior Wall 1 | |
| Exterior Wall 2 | |
| Roof Structure: | |
| Roof Cover | |
| Interior Wall 1 | |
| Interior Wall 2 | |
| Interior Floor 1 | |
| Interior Floor 2 | |
| Heat Fuel | |
| Heat Type | |
| AC Type | |
| Bedrooms | |
| Full Baths | |
| Half Baths | |
| Extra Fixtures | |
| Total Rooms | |
| Extra Kitchens | |
| Frame | |
| Insulation | |
| Bsmt Garage | |
| Foundation | |
| FBM Area | |
| Fireplaces | |
| # of Heat Systems | |
| Solar HW | |
| Electrical | |

Building Photo



(<http://images.vgsi.com/photos/NorwalkCTPhotos//default.jpg>)

Building Layout



| Building Sub-Areas (sq ft) | Legend |
|--------------------------------|--------|
| No Data for Building Sub-Areas | |

Extra Features

| Extra Features | Legend |
|----------------------------|--------|
| No Data for Extra Features | |

Land

Land Use

| | |
|--------------------|--------------|
| Use Code | 100 |
| Description | Resid Vacant |

Land Line Valuation

| | |
|---------------------|------|
| Size (Acres) | 0.87 |
| Frontage | |

Zone B
Neighborhood 0334

Depth
Assessed Value \$160,490
Appraised Value \$229,270

Outbuildings



| Outbuildings | <u>Legend</u> |
|--------------------------|----------------------|
| No Data for Outbuildings | |

Valuation History

| Appraisal | | | |
|-----------------------|---------------------|-------------|--------------|
| Valuation Year | Improvements | Land | Total |
| 2014 | \$0 | \$229,266 | \$229,266 |
| 2013 | \$0 | \$229,266 | \$229,266 |
| 2012 | \$0 | \$391,000 | \$391,000 |

| Assessment | | | |
|-----------------------|---------------------|-------------|--------------|
| Valuation Year | Improvements | Land | Total |
| 2014 | \$0 | \$160,490 | \$160,490 |
| 2013 | \$0 | \$160,490 | \$160,490 |
| 2012 | \$0 | \$273,700 | \$273,700 |

(c) 2016 Vision Government Solutions, Inc. All rights reserved.

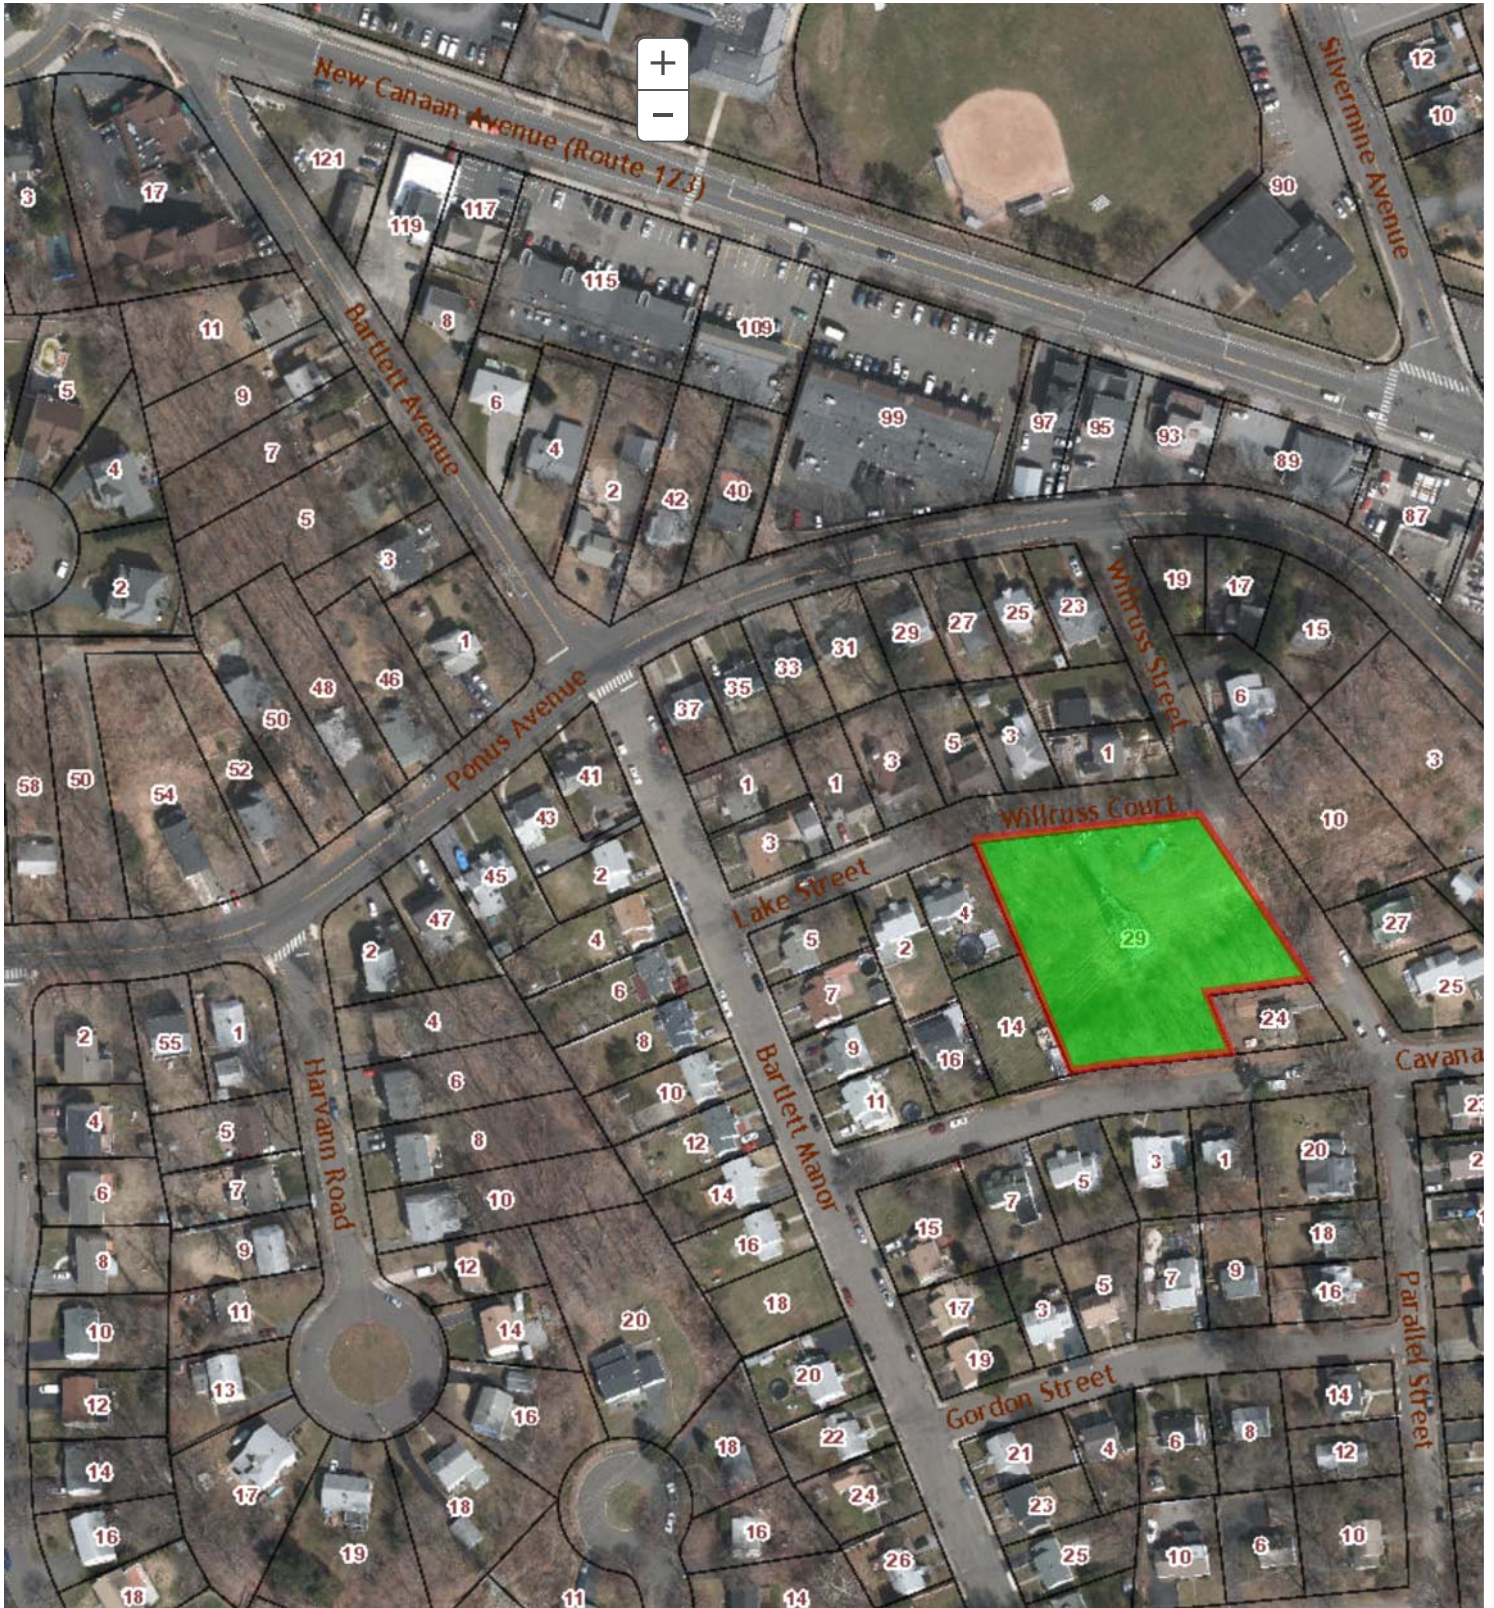



City of Norwalk, CT - GIS



QUICKMAPS



Street Map (Default)




Parcel Map
 Zoning - Outlines




Parcel with Aerial
 Wetland Soils



City Border
 Zoning Map




Wetlands Map



Voting District Map



Open Space Map



Fire District Map



Historic District Map



Sewer System Map



Fire Hydrant Map

Share this map

Close tool tray to resume operation

Willruss



*Advanced Search >>

Search Results

Selection Results

Clear Zoom to results Export

Parcel ID ▲ Address ▲ Owner ▲

No results

| | | |
|------------|----------------------|--------------------------------------|
| 5-56-137-0 | 6 WILLRUSS ST | CAMPBELL JOHN A III * ANDREA L |
| 5-56-138-0 | 10 WILLRUSS ST | CONN LIGHT * POWER CO |
| 5-56-152-0 | 29 WILLRUSS CT | CONN LIGHT * POWER CO |
| 5-56-153-0 | 1 WILLRUSS CT | PARTIDA SALVADOR |
| 5-56-157-0 | 3 WILLRUSS CT | GUILES MARY M |
| 5-56-158-0 | 5 WILLRUSS CT | GAVIRIA PILAR & LOPEZ MARIA |




Version: 1.1.5

Turn in the text and click on map

Select a shape then draw on map to add graphic

click on a parcel, enter a buffer distance, select desired units and click the 'Buffer' button

- Default Parcel Search
- Parcel by Parcel ID
- Parcel by Owner
- Parcel by Address
- Parcel by Street Name



Street Map



Topo Map



2013 Aerial



2007 Aerial



2003 Aerial



1995 Aerial

Exhibit C



T-MOBILE NORTHEAST LLC

SITE #: CT11356C

SITE NAME: CT356/CL&P TOWER - RT.123

SITE ADDRESS:

2 WILLRUSS STREET POLE #1102 LINE # 1880

NORWALK, CT, 06850

WIRELESS BROADBAND FACILITY
CONSTRUCTION DRAWINGS
(793D CONFIGURATION)



T-MOBILE NORTHEAST, LLC
35 GRIFFIN ROAD SOUTH
BLOOMFIELD, CT 06002
OFFICE: (860) 692-7100
FAX: (860) 692-7159




ATLANTIS DESIGN
GROUP, INC.
3210 MAIN CAMPUS DRIVE
LEXINGTON, MA 02421
Phone number: 617-852-3611
Fax Number: 781-742-2247

SUBMITTALS

| DATE | DESCRIPTION | REVISION |
|----------|-------------------|----------|
| 06/24/16 | ISSUED FOR REVIEW | A |
| 08/27/16 | REVISION | 0 |
| 09/08/16 | FINAL CD | 1 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

| DEPT. | DATE | APP'D | REVISIONS |
|----------|------|-------|-----------|
| RFE | | | |
| RF MAN. | | | |
| ZONING | | | |
| OPS | | | |
| CONSTR. | | | |
| SITE AC. | | | |

PROJECT NO: CT11356C
DRAWN BY: MB
CHECKED BY: KM

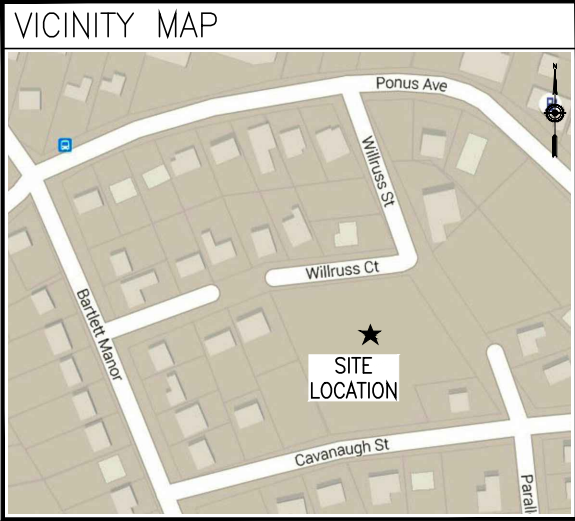

- GENERAL NOTES**
1. THE CONTRACTOR SHALL GIVE ALL NOTICES AND COMPLY WITH ALL LAWS, ORDINANCES, RULES, REGULATIONS AND LAWFUL ORDERS OF ANY PUBLIC AUTHORITY, MUNICIPAL AND UTILITY COMPANY SPECIFICATIONS, AND LOCAL AND STATE JURISDICTIONAL CODES BEARING ON THE PERFORMANCE OF THE WORK. THE WORK PERFORMED ON THE PROJECT AND THE MATERIALS INSTALLED SHALL BE IN STRICT ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS AND ORDINANCES.
 2. THE ARCHITECT/ENGINEER HAVE MADE EVERY EFFORT TO SET FORTH IN THE CONSTRUCTION AND CONSTRUCT DOCUMENTS THE COMPLETE SCOPE OF WORK. THE CONTRACTOR BIDDING THE JOB IS NEVERTHELESS CAUTIONED THAT MINOR OMISSIONS OR ERRORS IN THE DRAWINGS AND OR SPECIFICATIONS SHALL NOT EXCUSE SAID CONTRACTOR FROM COMPLETING THE PROJECT AND IMPROVEMENTS IN ACCORDANCE WITH THE INTENT OF THESE DOCUMENTS.
 3. THE CONTRACTOR OR BIDDER SHALL BEAR THE RESPONSIBILITY OF NOTIFYING (IN WRITING) THE T-MOBILE REPRESENTATIVE OF ANY CONFLICTS, ERRORS, OR OMISSIONS PRIOR TO THE SUBMISSION OF THE CONTRACTOR'S PROPOSAL OR PERFORMANCE OF WORK. IN THE EVENT OF DISCREPANCIES, THE CONTRACTOR SHALL PRICE THE MORE COSTLY OR EXPENSIVE WORK, UNLESS DIRECTED IN WRITING OTHERWISE.
 4. THE SCOPE OF WORK SHALL INCLUDE FURNISHING OF ALL MATERIALS, EQUIPMENT, LABOR AND ALL OTHER MATERIALS AND LABOR DEEMED NECESSARY TO COMPLETE THE WORK/PROJECT AS DESCRIBED HEREIN.
 5. THE CONTRACTOR SHALL VISIT THE JOB SITE PRIOR TO THE SUBMISSION OF BIDS OR PERFORMING WORK TO FAMILIARIZE HIMSELF WITH THE FIELD CONDITIONS AND TO VERIFY THAT THE PROJECT CAN BE CONSTRUCTED IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
 6. THE CONTRACTOR SHALL OBTAIN AUTHORIZATION TO PROCEED WITH CONSTRUCTION PRIOR TO STARTING WORK ON ANY ITEM NOT CLEARLY DEFINED BY THE CONSTRUCTION DRAWINGS/CONTRACT DOCUMENTS.
 7. THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT AND MATERIALS ACCORDING TO THE MANUFACTURER'S/VENDOR'S SPECIFICATIONS UNLESS NOTED OTHERWISE OR WHERE LOCAL CODES OR ORDINANCES TAKE PRECEDENCE.
 8. THE CONTRACTOR SHALL PROVIDE A FULL SET OF CONSTRUCTION DOCUMENTS AT THE SITE UPDATED WITH THE LATEST REVISIONS AND ADDENDUM OR CLARIFICATIONS AVAILABLE FOR THE USE BY ALL PERSONNEL INVOLVED WITH THE PROJECT.
 9. THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE PROJECT DESCRIBED HEREIN. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ALL CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, AND PROCEDURES AND FOR COORDINATING ALL PORTIONS OF THE WORK UNDER CONTRACT.
 10. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ANY PERMITS AND INSPECTIONS WHICH ARE REQUIRED FOR THE WORK BY THE ARCHITECT/ENGINEER, THE STATE, COUNTY, OR LOCAL GOVERNMENT AUTHORITY.
 11. THE CONTRACTOR SHALL MAKE NECESSARY PROVISIONS TO PROTECT EXISTING IMPROVEMENTS, EASEMENTS, PAVING, CURBING, ETC., DURING CONSTRUCTION. UPON COMPLETION OF WORK, THE CONTRACTOR SHALL REPAIR ANY DAMAGE THAT MAY HAVE OCCURRED DUE TO CONSTRUCTION ON OR ABOUT THE PROPERTY.
 12. THE CONTRACTOR SHALL KEEP THE GENERAL WORK AREA CLEAN AND HAZARD FREE DURING CONSTRUCTION AND DISPOSE OF ALL DIRT, DEBRIS, RUBBISH AND REMOVE EQUIPMENT NOT SPECIFIED AS REMAINING ON PROPERTY. PREMISES SHALL BE LEFT IN CLEAN CONDITION AND FREE FROM PAINT SPOTS, DUST, OR SMUDGES OF ANY NATURE.
 13. THE CONTRACTOR SHALL COMPLY WITH ALL OSHA REQUIREMENTS, AS WELL AS THE LATEST EDITIONS OF ANY PERTINENT STATE SAFETY REGULATIONS.
 14. THE CONTRACTOR SHALL NOTIFY THE T-MOBILE REPRESENTATIVE WHERE A CONFLICT OCCURS ON ANY OF THE CONTRACT DOCUMENTS. THE CONTRACTOR IS NOT TO ORDER MATERIAL OR CONSTRUCT ANY PORTION OF THE WORK THAT IS IN CONFLICT UNTIL CONFLICT IS RESOLVED BY THE T-MOBILE REPRESENTATIVE.
 15. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, ELEVATIONS, PROPERTY LINES, ETC., ON THE JOB.
 16. THE CONTRACTOR SHALL RETURN ALL DISTURBED AREAS TO THEIR ORIGINAL CONDITION AT THE COMPLETION OF WORK.
 17. ATLANTIS DESIGN GROUP, INC. HAS NOT CONDUCTED A STRUCTURAL ANALYSIS FOR THIS PROJECT AND DOES NOT ASSUME ANY LIABILITY FOR THE ADEQUACY OF THE STRUCTURE AND COMPONENTS.
 18. REFER TO STRUCTURAL ANALYSIS DOCUMENT ENTITLED, "STRUCTURAL ANALYSIS REPORT, TRANSMISSION TOWER #1102, LINE 1880" PREPARED BY PAUL J. FORD & COMPANY. "T-MOBILE SITE ID CT11356C", DATED AUGUST 29, 2016.

SITE INFORMATION

SITE NUMBER: CT11356C
 SITE NAME: CT356/CL&P TOWER - RT.123
 SITE ADDRESS: 2 WILLRUSS STREET POLE #1102 LINE # 1880 NORWALK, CT, 06850
 LAT./LONG.: N 41.12576 / W -73.4327
 JURISDICTION: FAIRFIELD COUNTY
 PROPERTY OWNER: HANK O'BRIEN, REAL ESTATE ANALYST, T&D ROW & SURVEY ENGINEERING, 860-665-6987 HENRY.OBRIEN@NU.COM 107 SELDEN STREET

PROJECT SUB-CONTRACTORS

APPLICANT: T-MOBILE NORTHEAST, LLC.
35 GRIFFIN ROAD SOUTH BLOOMFIELD, CT 06002 (860) 692-7100

PROJECT MANAGER: LISA LIN ALLEN
NORTHEAST SITE SOLUTIONS
54 MAIN STREET STURBRIDGE, MA 01566 (508) 434-5237

A&E: ATLANTIS DESIGN GROUP INC.
3210 MAIN CAMPUS DRIVE LEXINGTON, MA 02421 (617)-852-3611

CODE COMPLIANCE

CONNECTICUT STATE BUILDING CODE
 2005 CONNECTICUT BUILDING CODE WITH 2013 AMENDMENT
 2011 NATIONAL ELECTRICAL CODE
 CONSTRUCTION TYPE: 2B USE GROUP: N/A

SHEET INDEX

| SHEET | DESCRIPTION |
|-------|------------------------------|
| T-1 | TITLE SHEET |
| N-1 | GENERAL AND ELECTRICAL NOTES |
| A-1 | SITE PLAN AND ELEVATION |
| A-2 | DETAILS |
| E-1 | GROUNDING DIAGRAM |
| E-2 | GROUNDING DETAILS |
| S1 | TOWER ELEVATIONS AND DETAILS |

DO NOT SCALE DRAWINGS

CONTRACTOR SHALL VERIFY PLANS AND EXISTING DIMENSIONS AND CONDITIONS ON THE JOB SITE AND SHALL IMMEDIATELY NOTIFY THE ARCHITECT IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK OR BE RESPONSIBLE FOR SAME.

CALL BEFORE YOU DIG:
WWW.CBYD.COM
CALL 800 922 4455, OR 811

CALL THREE WORKING DAYS PRIOR TO DIGGING
SAFETY PRECAUTIONS SHALL BE IMPLEMENTED BY CONTRACTOR(S) AT ALL TRENCHING IN ACCORDANCE WITH CURRENT OSHA STANDARDS.

COLOR CODE FOR UTILITY LOCATIONS

| | | |
|-------------------|-----------------------------|--|
| ELECTRIC - RED | SEWER - GREEN | |
| GAS/OIL - YELLOW | SURVEY - PINK | |
| TEL/CATV - ORANGE | PROPOSED EXCAVATION - WHITE | |
| WATER - BLUE | RECLAIMED WATER - PURPLE | |



THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF T-MOBILE. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED.

SITE NUMBER
CT11356C
SITE NAME
CT356/CL&P TOWER - RT.123
SITE ADDRESS
2 WILLRUSS STREET
POLE #1102 LINE # 1880
NORWALK, CT, 06850

SHEET TITLE
TITLE SHEET

SHEET NUMBER
T-1

REFER TO STRUCTURAL ANALYSIS DOCUMENT ENTITLED, "STRUCTURAL ANALYSIS REPORT, TRANSMISSION TOWER #1102, LINE 1880" PREPARED BY PAUL J. FORD & COMPANY. "T-MOBILE SITE ID CT11356C", DATED AUGUST 29, 2016.



(P) COMMSCOPE RV4PX306R ANTENNA TO REPLACE
(E) COMMSCOPE LNX-6512DS-A1M ANTENNA (TYP 1/SECTOR, TOTAL OF 3)

(E) (APX16DWV-16DWV-S-E-A20) ANTENNA TO REMAIN (TYP 1/SECTOR, TOTAL OF 3)

RAD CENTER OF EXISTING AND PROPOSED T-MOBILE ANTENNAS
ELEV.= 114'± (AGL)


RAD CENTER OF EXISTING ANTENNAS BY OTHERS
ELEV.= 104'± (AGL)

TOP OF EXISTING UTILITY TOWER
ELEV.= 94'± (AGL)

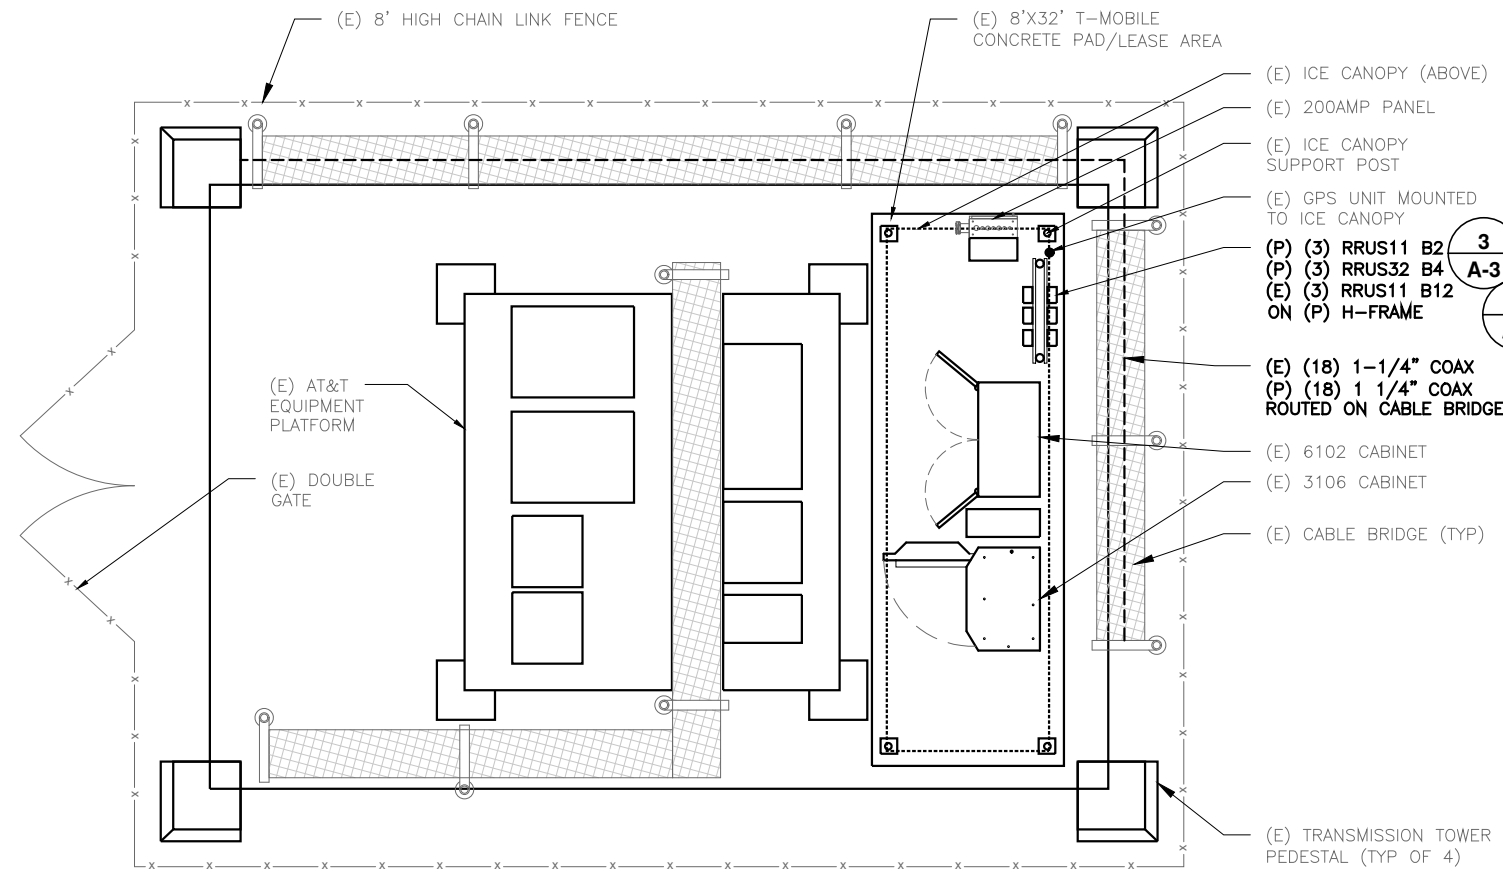


SITE PLAN

SCALE: 1/8" = 1'-0" (11x17)
SCALE: 1/4" = 1'-0" (24x36)



1
A-1

2
A-1

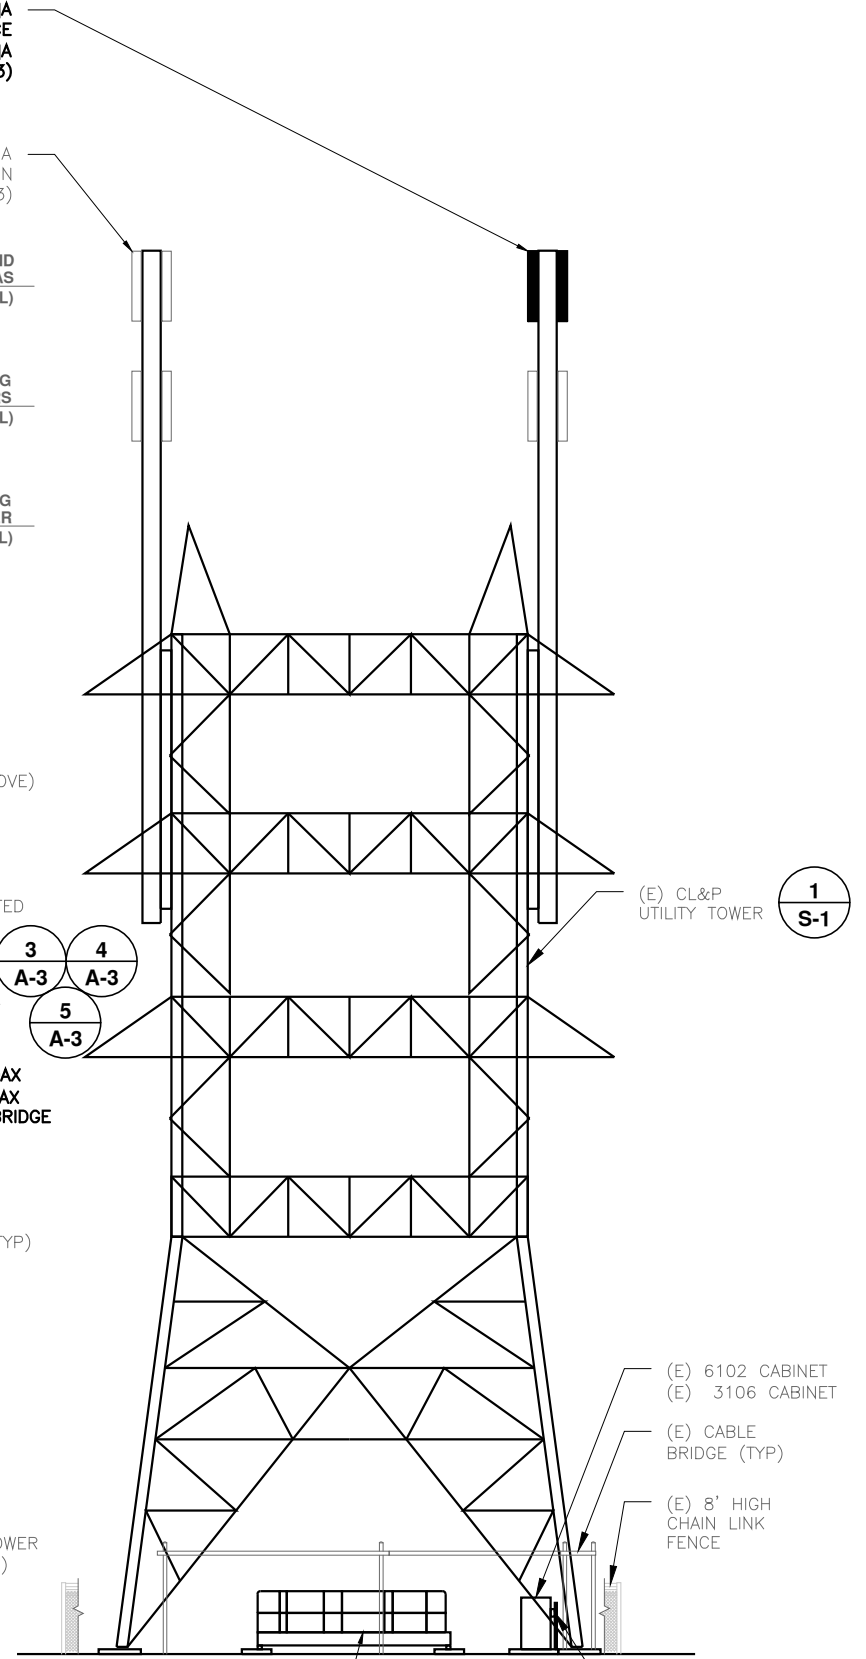

ELEVATION

SCALE: 1/16" = 1'-0" (11x17)
SCALE: 1/8" = 1'-0" (24x36)



2
A-1

GENERAL SITE NOTES

1. SITE INFORMATION WAS OBTAINED FROM A FIELD INVESTIGATION PERFORMED BY ATLANTIS DESIGN GROUP, INC. CONTRACTOR TO FIELD VERIFY DIMENSIONS AS NECESSARY BEFORE CONSTRUCTION.
2. THE PROPOSED DEVELOPMENT DOES NOT INCLUDE SIGNS OF ADVERTISING.
3. THE PROPOSED DEVELOPMENT IS UNMANNED AND THEREFORE DOES NOT REQUIRE A MEANS OF WATER SUPPLY OR SEWAGE DISPOSAL.
4. NO LANDSCAPING WORK IS PROPOSED IN CONJUNCTION WITH THIS DEVELOPMENT OTHER THAN THAT WHICH IS SHOWN.
5. THE PROPOSED DEVELOPMENT DOES NOT INCLUDE OUTDOOR STORAGE OR ANY SOLID WASTE RECEPTACLES.
6. UTILITIES SHOWN ON PLAN ARE TAKEN FROM OWNERS RECORDS AND FIELD LOCATION OF VISIBLE SURFACE FEATURES. THE EXISTENCE, EXTENT AND EXACT HORIZONTAL AND VERTICAL LOCATIONS OF UTILITIES HAS NOT BEEN VERIFIED. ANY CONTRACTOR PERFORMING WORK ON THIS SITE MUST CONTACT CALL BEFORE YOU DIG THREE WORKING DAYS PRIOR TO COMMENCING WORK.
7. ALL OBSOLETE OR UNUSED FACILITIES SHALL BE REMOVED WITHIN 12 MONTHS OF CESSATION OF OPERATIONS.

SITE LEGEND

- SITE PROPERTY LINE
- STREET OR ROAD
- x-x-x- CHAIN LINK FENCE
- OPAQUE WOODEN FENCE
- BOARD ON BOARD FENCE
- DECIDUOUS TREES/SHRUBS
- EVERGREEN TREES/SHRUBS
- TREE LINE
- UTILITY POLE
- (E) EXISTING
- (N) NEW
- (P) PROPOSED
- (F) FUTURE
- PROP. LTE ANTENNA
- PROP. UMS/GSM ANTENNA
- EX. GSM ANTENNA
- EX. UMS ANTENNA

T-Mobile
T-MOBILE NORTHEAST, LLC
35 GRIFFIN ROAD SOUTH
BLOOMFIELD, CT 06002
OFFICE: (860) 692-7100
FAX: (860) 692-7159

ATLANTIS DESIGN GROUP, INC.
3210 MAIN CAMPUS DRIVE
LEXINGTON, MA 02421
Phone number: 617-852-3611
Fax Number: 781-742-2247

SUBMITTALS

| DATE | DESCRIPTION | REVISION |
|----------|-------------------|----------|
| 06/24/16 | ISSUED FOR REVIEW | A |
| 08/27/16 | REVISION | 0 |
| 09/08/16 | FINAL CD | 1 |

| DEPT. | DATE | APP'D | REVISIONS |
|----------|------|-------|-----------|
| RFE | | | |
| RF MAN. | | | |
| ZONING | | | |
| OPS | | | |
| CONSTR. | | | |
| SITE AC. | | | |

PROJECT NO: CT11356C
DRAWN BY: MB
CHECKED BY: KM

STATE OF CONNECTICUT
HOSSEIN VAHEDI
NO. ARI. 11182
LICENSED ARCHITECT
PROFESSIONAL SEAL


THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF T-MOBILE. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED.

SITE NUMBER
CT11356C
SITE NAME
CT356/CL&P TOWER - RT.123
SITE ADDRESS
2 WILLRUSS STREET
POLE #1102 LINE # 1880
NORWALK, CT, 06850

SHEET TITLE
SITE PLAN
AND
ELEVATION

SHEET NUMBER
A-1

REFER TO STRUCTURAL ANALYSIS DOCUMENT ENTITLED,
"STRUCTURAL ANALYSIS REPORT, TRANSMISSION TOWER #1102,
LINE 1880" PREPARED BY PAUL J. FORD & COMPANY.
"T-MOBILE SITE ID CT11356C", DATED AUGUST 29, 2016.

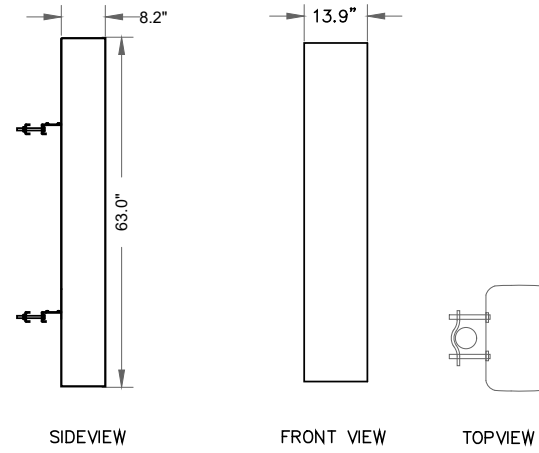


MANUFACTURE: COMMSCOPE
MODEL NO. RV4PX306R
DIMENSIONS - HxWxD, (IN) 63.0x13.9x8.2
WEIGHT - 52.9 LB

**COMMSCOPE RV4PX306R
ANTENNA DETAIL**

SCALE: N.T.S


1
A-2

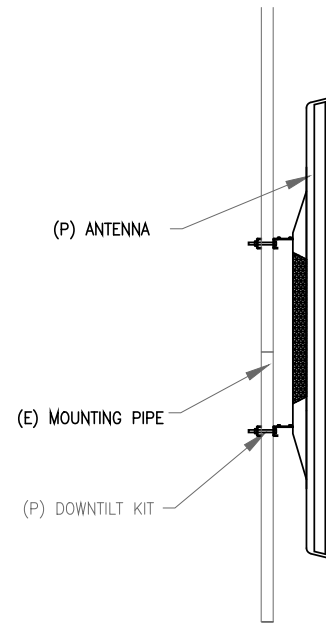

ANTENNA MOUNT DETAILS

SCALE: N.T.S

2
A-2

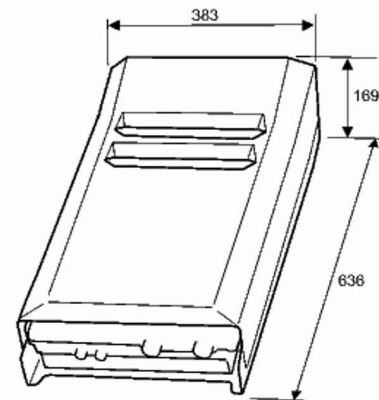


WEIGHT: 20 KG (= 44.1 LBS)
DIMENSIONS: 636 X 383 X 169 MM
(H X W X D) (=25.0" X 15.1" X 6.7")

RRUS01 B2 DETAILS

SCALE: N.T.S


3
A-3

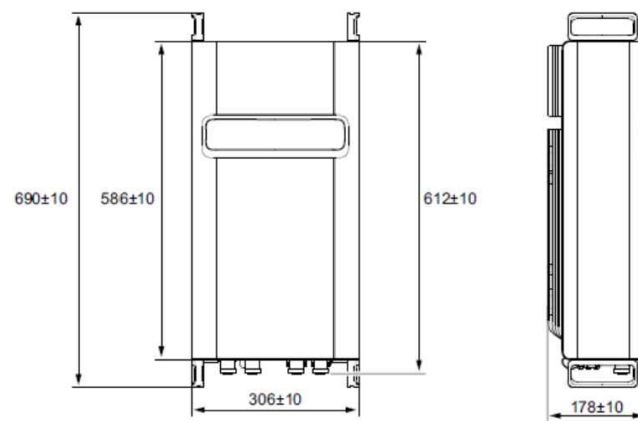

RRUS32 DETAILS

SCALE: N.T.S

4
A-3

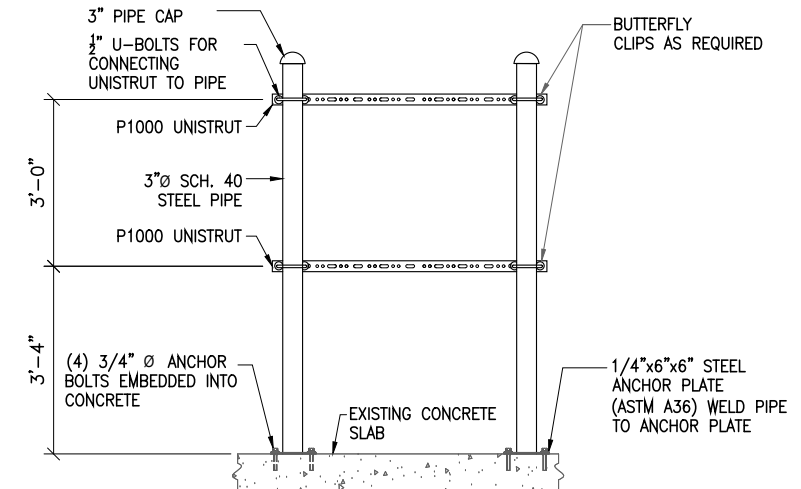

H-FRAME DETAILS

SCALE: N.T.S

5
A-3



T-MOBILE NORTHEAST, LLC
35 GRIFFIN ROAD SOUTH
BLOOMFIELD, CT 06002
OFFICE: (860) 692-7100
FAX: (860) 692-7159




**ATLANTIS DESIGN
GROUP, INC.**
3210 MAIN CAMPUS DRIVE
LEXINGTON, MA 02421
Phone number: 617-852-3811
Fax Number: 781-742-2247

SUBMITTALS

| DATE | DESCRIPTION | REVISION |
|----------|-------------------|----------|
| 06/24/16 | ISSUED FOR REVIEW | A |
| 08/27/16 | REVISION | 0 |
| 09/08/16 | FINAL CD | 1 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

| DEPT. | DATE | APP'D | REVISIONS |
|----------|------|-------|-----------|
| RFE | | | |
| RF MAN. | | | |
| ZONING | | | |
| OPS | | | |
| CONSTR. | | | |
| SITE AC. | | | |

PROJECT NO: CT11356C
DRAWN BY: MB
CHECKED BY: KM



THIS DOCUMENT IS THE CREATION,
DESIGN, PROPERTY AND COPYRIGHTED
WORK OF T-MOBILE. ANY DUPLICATION
OR USE WITHOUT EXPRESS WRITTEN
CONSENT IS STRICTLY PROHIBITED.

SITE NUMBER
CT11356C

SITE NAME
CT356/CL&P TOWER - RT.123
SITE ADDRESS
2 WILLRUSS STREET
POLE #1102 LINE # 1880
NORWALK, CT, 06850


SHEET TITLE
DETAILS

SHEET NUMBER
A-2

| SUBMITTALS | | |
|------------|-------------------|----------|
| DATE | DESCRIPTION | REVISION |
| 06/24/16 | ISSUED FOR REVIEW | A |
| 08/27/16 | REVISION | 0 |
| 09/08/16 | FINAL CD | 1 |

| DEPT. | DATE | APP'D | REVISIONS |
|----------|------|-------|-----------|
| RFE | | | |
| RF MAN. | | | |
| ZONING | | | |
| OPS | | | |
| CONSTR. | | | |
| SITE AC. | | | |

| | |
|-------------|----------|
| PROJECT NO: | CT11356C |
| DRAWN BY: | MB |
| CHECKED BY: | KM |




THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF T-MOBILE. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED.

SITE NUMBER
CT11356C

SITE NAME
CT356/CL&P TOWER - RT.123
 SITE ADDRESS
2 WILLRUSS STREET
 POLE #1102 LINE # 1880
 NORWALK, CT, 06850

SHEET TITLE
GROUNDING DIAGRAM AND POWER ONE LINE DIAGRAM

SHEET NUMBER
E-1

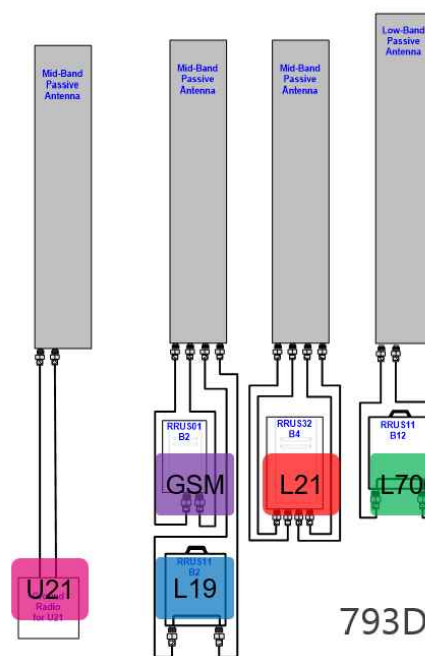

TRUNK FIBER NOTES:

1. IN GENERAL THIS CABLE WILL HANDLE SIMILARLY TO 7/8" COAXIAL CABLE, AND SIMILAR INSTALLATION TECHNIQUES APPLY. ALL CABLES ARE INDIVIDUALLY SERIALIZED, BE SURE TO WRITE DOWN THE CABLE SERIAL NUMBER FOR FUTURE REFERENCE.
2. THE TERMINATED FIBER ENDS (THE BROKEN OUT FIBERS PLUS CONNECTORS) HOWEVER ARE FRAGILE, AND THESE MUST BE PROTECTED DURING THE INSTALLATION PROCESS.
3. LEAVE THE PROTECTIVE TUBE AND SOCK AROUND THE FIBER TAILS AND CONNECTORS IN PLACE DURING HOISTING AND SECURING THE CABLE. REMOVE THIS ONLY JUST PRIOR TO MAKING THE FINAL CONNECTIONS TO THE OVP BOX.
4. DO NOT BEND THE FIBER ENDS (IN THE ORANGE FURCATION TUBES) TIGHTER THAN 3/4" (19MM) BEND RADIUS, ELSE THERE IS A RISK OF BREAKING THE GLASS FIBERS.
5. BE SURE THAT THE LACE UP ENDS AND FIBER CONNECTORS ARE NOT DAMAGED BY ATTACHMENT OF A HOISTING GRIP OR DURING THE HOISTING PROCESS. ATTACH A HOISTING GRIP ON THE JACKETED CABLE NO LESS THAN 6 INCHES BELOW THE FIBER BREAKOUT POINT. IF A HOISTING GRIP IS NOT EASILY ATTACHED, USE A SIMPLE LINE ATTACHED BELOW THE FIBER BREAK-OUT POINT (I.E. AT THE CABLE OUTER JACKET). PREVENT THE FIBER TAILS (IN PROTECTIVE TUBE) AT THE CABLE END FROM UNDUE MOVEMENT DURING HOISTING BY SECURING THE PROTECTIVE TUBE (WITH OUTER SOCK) TO THE HOISTING LINE.
6. DURING HOISTING ENSURE THAT THERE IS A FREE PATH AND THAT THE CABLE, AND ESPECIALLY THE FIBER ENDS, WILL NOT BE SNAGGED ON TOWER MEMBERS OR OTHER OBSTACLES.
7. INSTALLATION TEMPERATURE RANGE IS -22F TO 158F (-30C TO +70C).
8. MINIMUM CABLE BEND RADII ARE 22.2" (565MM) LOADED (WITH TENSION ON THE CABLE) AND 11.1" (280MM) UNLOADED.
9. MAXIMUM CABLE TENSILE LOAD IS 3560 N (800 LB) SHORT TERM (DURING INSTALLATION) AND 1070 N (240 LB) LONG TERM.
10. COMMSCOPE NON LACE UP GRIP RECOMMENDED FOR MONOPOLE INSTALLATIONS.
11. MAXIMUM HANGER SPACING 3FT (0.9 M).

HYBRID FIBER/POWER JUMPER NOTES:

1. IN GENERAL THIS CABLE WILL HANDLE SIMILARLY TO A 3/8" COAXIAL CABLE.
2. THE TERMINATED FIBER ENDS HOWEVER ARE FRAGILE AND MUST BE PROTECTED DURING INSTALLATION. LEAVE THE PACKAGING AROUND THE FIBER ENDS IN PLACE UNTIL READY TO CONNECT THE JUMPER BETWEEN OVP AND RRU OR BBU.
3. DO NOT BEND THE FIBER BREAKOUT CABLE (BETWEEN THE MAIN CABLE AND THE FIBER CONNECTOR) TIGHTER THAN 3/4" (19MM) RADIUS, ELSE THERE IS A RISK OF BREAKING THE GLASS.
4. ATTACH THE MAIN CABLE SECURELY TO THE STRUCTURE OR EQUIPMENT USING HANGERS AND/OR CABLE TIES TO PREVENT STRAIN ON CONNECTIONS FROM MOVEMENT IN WIND OR SNOW/ICE CONDITIONS.
5. ENSURE THE LC FIBER CONNECTORS ARE SEATED FIRMLY IN PANEL IN OVP OR IN EQUIPMENT.
6. INSTALLATION TEMPERATURE RANGE IS -22F TO 158F (-30C TO 70C).
7. MINIMUM CABLE BEND RADII ARE 10.3 INCH (265MM) LOADED (WITH TENSION ON THE CABLE) AND 5.2 INCH (130MM) UNLOADED.
8. MAXIMUM CABLE TENSILE LOAD IS 350 LB (1560N) SHORT TERM (DURING INSTALLATION) AND 105 LB (470N) LONG TERM.
9. STANDARD LENGTHS AVAILABLE ARE 6 FEET, 15 FEET AND 20 FEET


793D CONFIGURATION COAX/FIBER PLUMBING DIAGRAM

SCALE: N.T.S

2
E-1

NOTES:

1. PROVIDE #2AWG GROUNDING CONDUCTOR, U.O.N.
2. DO NOT INSTALL GROUND KIT AT BEND. DIRECT GROUND WIRE DOWN TO ANTENNA BUSSBAR.
3. PROVIDE GROUNDING ELECTRODES IN QUANTITY, TYPE AND SIZE AS INDICATED ON SITE GROUNDING PLAN.
4. ADD COAX GROUND KIT CONNECTION TO BUSSBAR WHEN LENGTH OF COAX RUN (FROM EQUIPMENT TO ANTENNA) IS GREATER THAN 20'-0".
5. GROUND HCS BOX W/ #2AWG GROUNDING CONDUCTOR ATTACHED TO GOOD GROUND AS DIRECT AND SHORT AS POSSIBLE. USE GREEN STRANDED INSULATED CONDUCTOR TO CONNECT TO BUSSBAR/GROUND HALO OR BARE TINNED SOLID COPPER CONDUCTOR TO CONNECT TO GROUND RING.

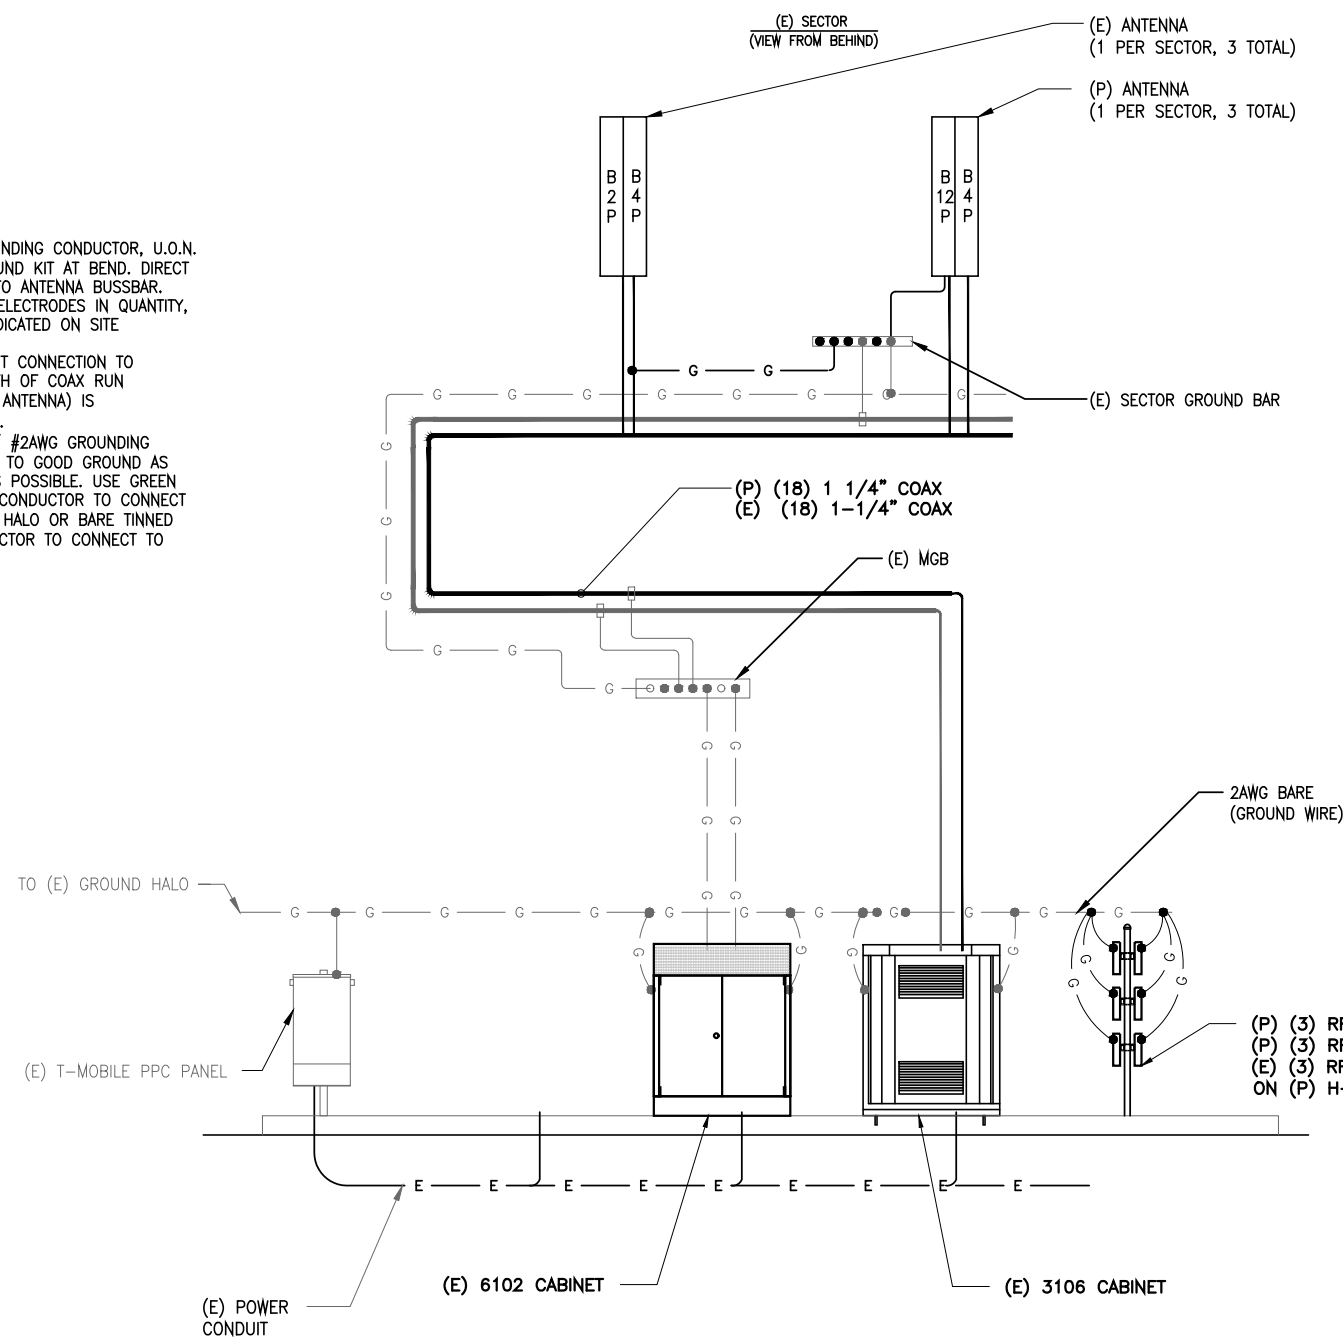


GROUNDING DIAGRAM

SCALE: N.T.S

1
E-1


(P) (3) RRUS11 B2
 (P) (3) RRUS32 B4
 (E) (3) RRUS11 B12
 ON (P) H-FRAME

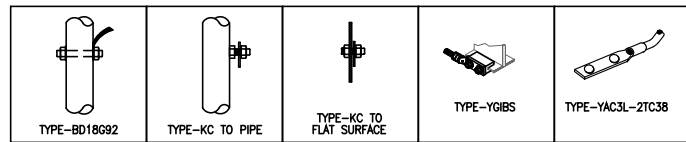

BURNDY GROUNDING DETAILS

SCALE: N.T.S.


1
E-2

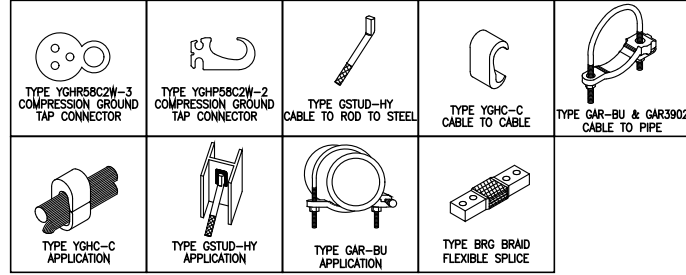

BURNDY GROUNDING PRODUCTS

SCALE: N.T.S.

2
E-2

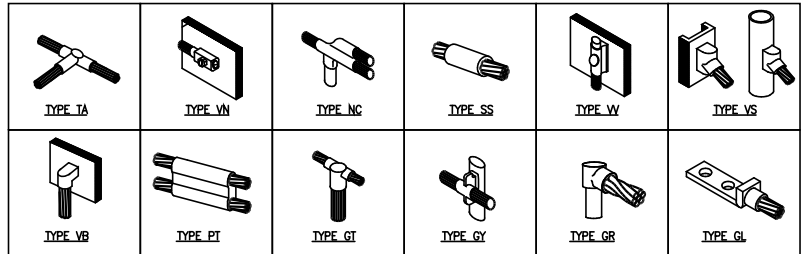

CADWELD GROUNDING CONNECTION PRODUCTS

SCALE: N.T.S.

3
E-2

TERMINATION TYPES:


- A. MECHANICAL COMPRESSION LUG
- B. DOUBLE BARRELL COMPRESSION CONNECTOR
- C. EXOTHERMIC TERMINATION
- D. BEAM CLAMP

| | SOLID #2 TINNED COPPER | #6 GROUND LEAD | #2/0 STRANDED MAIN DOWN CONDUCTOR | MASTER GRND BAR | STRUCTURAL OR TOWER STEEL | BLDG SERVICE ENTR OR GRND RING | GROUND ROD |
|---|------------------------|----------------|-----------------------------------|-----------------|---------------------------|--------------------------------|------------|
| SOLID #2 TINNED COPPER | B OR C | B OR C | | C | A, C, OR D | | C |
| #6 GROUND LEAD | B OR C | | | A | A, C, OR D | | |
| #2/0 STRANDED GRNDG ELECTRODE CONDUCTOR | | | A | A | A, C, OR D | A | |
| MASTER GROUND BAR | C | A | A | | | | |
| STRUCTURAL OR TOWER STEEL GROUND RING | A, C, OR D | A, C, OR D | A, C, OR D | | | | |


GROUNDING TERMINATION MARTIX

SCALE: N.T.S.

4
E-2

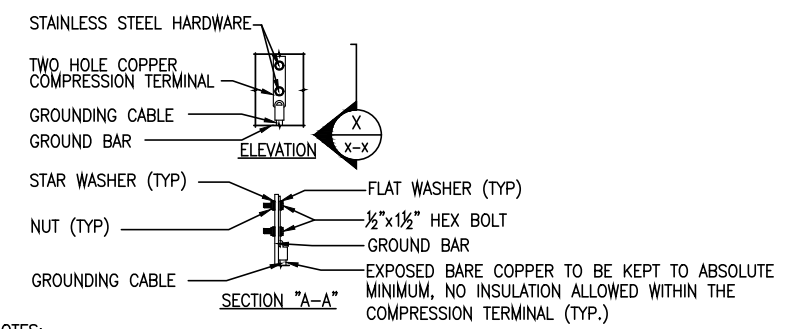

- NOTES:
- OXIDE INHIBITING COMPOUND TO BE USED AT ALL LOCATIONS.

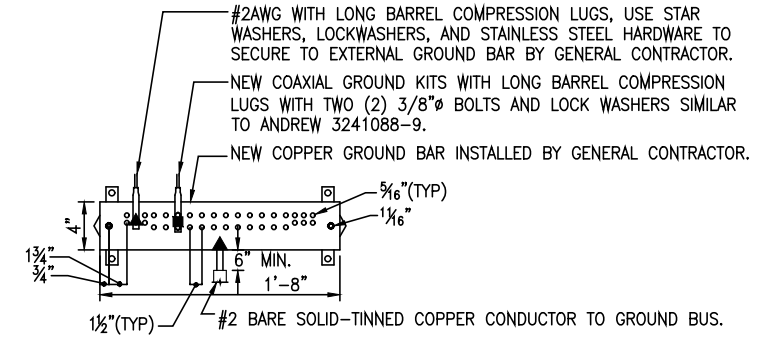


- NOTES:
- ALL HARDWARE STAINLESS STEEL COAT ALL SURFACES WITH KOPR-SHIELD BEFORE MATING.
 - FOR GROUND BOND TO STEEL ONLY: INSERT A TOOTH WASHER BETWEEN LUG AND STEEL, COAT ALL SURFACES WITH KOPR-SHIELD.
 - ALL HOLES ARE COUNTERSUNK 1/16".

TYPICAL GROUND BAR CONNECTIONS DETAIL

SCALE: N.T.S.


5
E-2

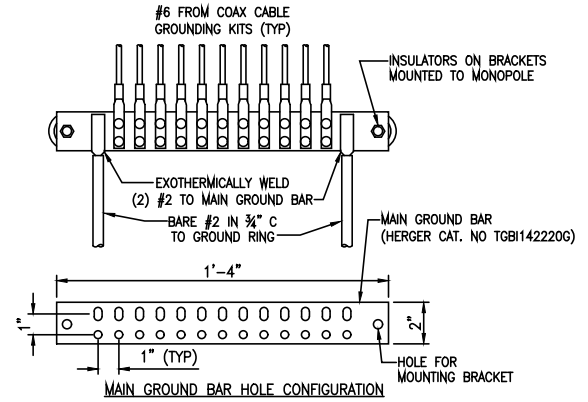

GROUND BAR DETAIL

SCALE: N.T.S.

6
E-2

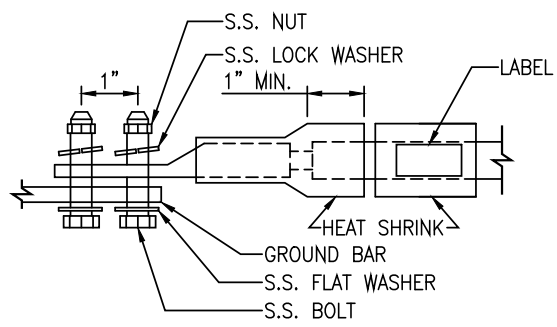

- LUG NOTES:
- ALL HARDWARE IS 18-8 STAINLESS STEEL, INCLUDING LOCK WASHERS.
 - ALL HARDWARE SHALL BE S.S. 3/8" OR LARGER.
 - FOR GROUND BOND TO STEEL ONLY: INSERT A DRAGON TOOTH WASHER BETWEEN LUG AND STEEL. COAT ALL SURFACES WITH ANTI-OXIDIZATION COMPOUND PRIOR TO MATING.

GROUND BAR DETAIL

SCALE: N.T.S.

7
E-2

T-Mobile
T-MOBILE NORTHEAST, LLC
35 GRIFFIN ROAD SOUTH
BLOOMFIELD, CT 06002
OFFICE: (860) 692-7100
FAX: (860) 692-7159

ATLANTIS DESIGN GROUP, INC.
3210 MAIN CAMPUS DRIVE
LEXINGTON, MA 02421
Phone number: 617-852-3611
Fax Number: 781-742-2247

| SUBMITTALS | | |
|------------|-------------------|----------|
| DATE | DESCRIPTION | REVISION |
| 06/24/16 | ISSUED FOR REVIEW | A |
| 08/27/16 | REVISION | 0 |
| 09/08/16 | FINAL CD | 1 |

| DEPT. | DATE | APP'D | REVISIONS |
|----------|------|-------|-----------|
| RFE | | | |
| RF MAN. | | | |
| ZONING | | | |
| OPS | | | |
| CONSTR. | | | |
| SITE AC. | | | |

| | |
|-------------|----------|
| PROJECT NO: | CT11356C |
| DRAWN BY: | MB |
| CHECKED BY: | KM |

STATE OF CONNECTICUT
HOSSEIN VAHEDI
NO. ARI. 11182
LICENSED ARCHITECT
PROFESSIONAL SEAL


THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF T-MOBILE. ANY DUPLICATION OR USE WITHOUT EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED.

SITE NUMBER
CT11356C
SITE NAME
CT356/CL&P TOWER - RT.123
SITE ADDRESS
2 WILLRUSS STREET
POLE #1102 LINE # 1880
NORWALK, CT, 06850







SHEET TITLE
GROUNDING DETAILS

SHEET NUMBER
E-2

31216-0025-002-015.DWG

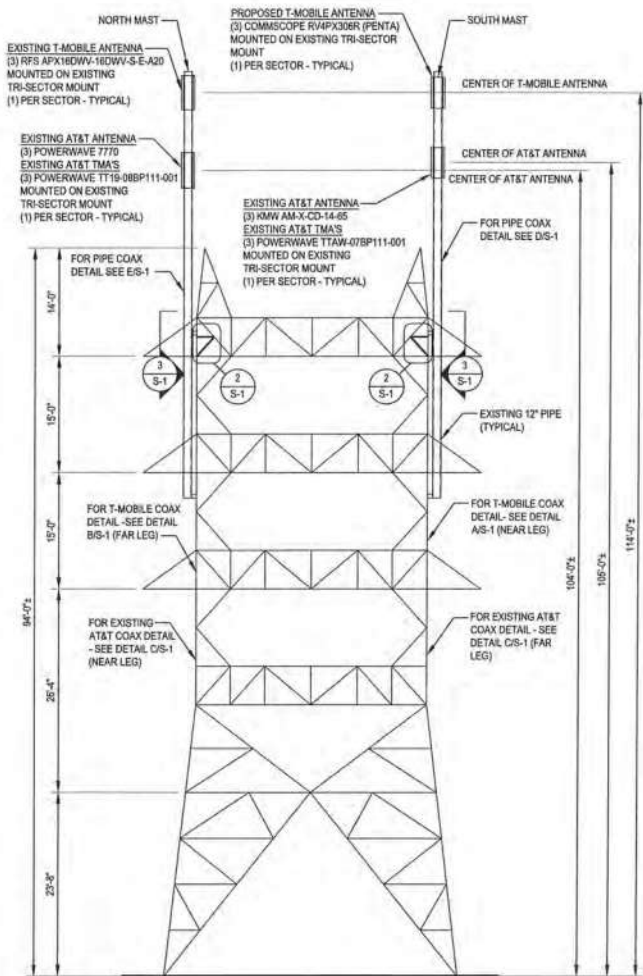


TOWER ELEVATION 1
S-1

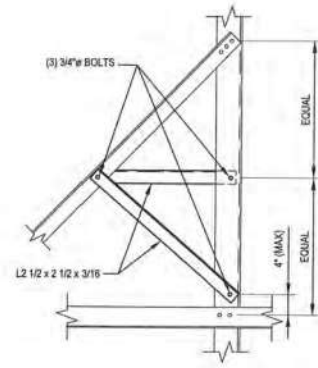

ELEVATION 2
S-1

NOTE:
ANTENNA MOUNT NOT SHOWN
IN ELEVATIONS 2IS-1 AND 3IS-1
FOR CLARITY

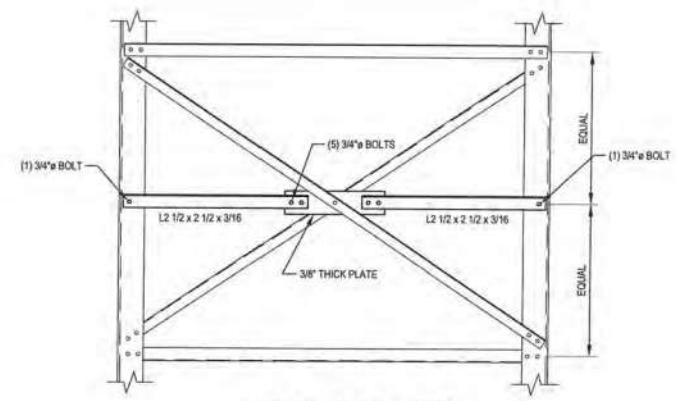

ELEVATION 3
S-1

© Copyright 2016, by Paul J. Ford and Company. All Rights Reserved. This document and the data contained herein, is proprietary to Paul J. Ford and Company. Issued in strict confidence and shall not, without the prior written permission of Paul J. Ford and Company, be reproduced, copied or used for any purpose other than the intended use for this specific project.

PJF PAUL J. FORD & COMPANY
250 E. Broad St., Ste. 600
Columbus, OH 43215
Phone 614.221.4679
www.pauljford.com

T-MOBILE
35 GRIFFIN ROAD SOUTH - BLOOMFIELD, CONNECTICUT 06002

CL&P TOWER #1102
LINE # 880
2 WILLRUSS STREET
NORWALK, FAIRFIELD COUNTY, CONNECTICUT
CT356CL&P TOWER - RT. 123 SITE #CT11356C

PROJECT No: 31216-0025-002.0125
DRAWN BY: FE
DESIGNED BY: JRA
CHECKED BY: *CAF*
DATE: 8-28-2016

TOWER ELEVATIONS AND DETAILS

S-1
SHEET NO. 4 OF 4

Exhibit D

Structural Analysis Report

Transmission Tower #1102
Line 1880

CT356/CL&P Tower - RT. 123 Site #CT11356C

Prepared on behalf of:



35 Griffin Road South
Bloomfield, CT 06002

PJF Project #A31216-0025.002.6125

| REVISION | DATE | DESCRIPTION | ENGINEER | PJF TRACKING |
|----------|------------|------------------------------|----------|-------------------------------------|
| 0 | 08/08/2016 | ORIGINAL ISSUE DATE | CBH | .001.6000 .001.6090 .001.6050 |
| 1 | 08/29/2016 | REVISED TO INCUDE TOWER MODS | JRA | .002.6125 |
| | | | | |
| | | | | |

Columbus
250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679



Orlando
1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039

Report Date: August 29, 2016

Client: T-Mobile
35 Griffin Road South
Bloomfield, CT 06002

Attention: Mark Richard
(860) 692-7143
mark.richard64@t-mobile.com

Utility Name: Eversource Energy
Structure ID: Transmission Tower #1102
Line Reference: 1880 - 115kV Line
Site Name and/or Reference: T-Mobile - CT356/CL&P Tower - RT. 123 Site #CT11356C
Site Address: 2 Willruss St
City, County, State: Norwalk, Fairfield County, CT
Latitude, Longitude: 41.12576, -73.4327

PJF Project: A31216-0025.002.6125

Paul J. Ford and Company is pleased to submit this "**Structural Analysis Report**". The purpose of this analysis is to determine if the modified structure has sufficient capacity to support the proposed equipment along with the existing wire loads described herein.

Analysis Criteria:

Reference Standards: IEEE Standards Association, "National Electrical Safety Code" (NESC) C2-2007
ANSI/TIA/EIA-222-F-1996 Standard "Structural Standard for Antenna Supporting Structures and Antennas"
ASCE Standard 10-15, "Design of Latticed Steel Transmission Structures"

Utility Specification: Northeast Utilities OTRM 059.1 (3/12/2014)

Proposed Appurtenance Loads:

The structure was analyzed with the addition of the proposed appurtenance loads shown in Table 1 combined with the existing and reserved loads shown in Tables 2 and 3 of this report.

Summary of Analysis Results:

Modified Structure: **Sufficient**
Existing Foundation: **Sufficient**
Existing Antenna Mount: **Sufficient**

We at Paul J. Ford and Company appreciate the opportunity to provide our professional services to you and T-Mobile. If you have any questions or need further assistance on this or any other projects please feel free to contact us.

Respectfully submitted by:
Paul J. Ford and Company



James R. Antoszewski, P.E.
Project Manager
jantoszewski@pjfweb.com



8/29/2016

TABLE OF CONTENTS

1) INTRODUCTION

2) ANALYSIS CRITERIA

- Reference Standard
- Utility Specification
- Table 1 – Proposed Antenna and Cable Information
- Table 2 – Existing and Reserved Antenna and Cable Information
- Table 3 – Existing Electrical Utility Wire Information
- Table 4a – Utility Tower Analysis - Load Case Information
- Table 4b – Antenna Mount Analysis - Load Case Information

3) ANALYSIS PROCEDURE

- Table 5 – Documents Provided
- 3.1) Analysis Method
- 3.2) Assumptions

4) ANALYSIS RESULTS

- Table 6 – Maximum Structure Element Usages
- Table 7 – Maximum Foundation Usages
- Table 8 – Maximum Antenna Mount Usages
- 4.1) Requirements

5) CONCLUSION

STANDARD CONDITIONS

APPENDIX A – STRUCTURE PHOTOS / PROFILE SHEET

APPENDIX B – LOAD CALCULATIONS

- B1 – Wire Load Sheets (Provided by NU)
- B2 – Load Calculations for Mast Analysis

APPENDIX C – COMPUTER OUTPUT

- C1 - TIA/EIA-222-F – Risa 3D Mast Analysis – Output
- C2 - NESC - Risa 3-D Mast Analysis – Output (for reactions only)
- C3 - PLS Software
- PLS Software – Structure Model Node Diagram
- PLS Software – Structure Usage Diagram (Color Coded by Usage)
- PLS Software – Output

APPENDIX D – SUPPLEMENTAL CALCULATIONS

- TIA-EIA-222-F - Mast Connection to CL&P Tower Analysis
- TIA-EIA-222-F – Mast Flange Analysis
- NESC – Tower Leg Local Analysis
- Foundation Analysis

APPENDIX E – SUPPLEMENTAL INFORMATION

1) INTRODUCTION

The purpose of this analysis is to determine if the modified structure has sufficient capacity to support the proposed equipment along with the existing wire loads described herein. The modified structure is a 94' tall quad circuit steel transmission tower designated as a 115kV type "D". The modified tower consists of a 70'-4" tall "Standard Tower" body plus (4) 23'-8" Leg Extensions.

The existing antenna mounting system consists of a flush mount installed on an existing antenna mast. Refer to Tables 1 and 2 below and the structure modification drawings located in Appendix A for further antenna equipment and mount information.

2) ANALYSIS CRITERIA

Reference Standards: IEEE Standards Association, "National Electrical Safety Code" (NESC) C2-2007
 ANSI/TIA/EIA-222-F-1996 Standard "Structural Standard for Antenna Supporting Structures and Antennas"
 ASCE Standard 10-15, "Design of Latticed Steel Transmission Structures"

Utility Specification: Northeast Utilities OTRM 059.1 (3/12/2014)

Table 1 – Proposed Antenna and Cable Information¹

| Mounting Level (feet) | Center Line Elevation (feet) | Number of Antennas | Antenna Manufacturer | Antenna Model | Number of Feed Lines | Feed Line Size (inches) | Note |
|-----------------------|------------------------------|--------------------|----------------------|-------------------|----------------------|-------------------------|------|
| 114 | 114 | 3 | Commscope | RV4PX306R (Penta) | 18 | 1-1/4 | 2 |

Notes:

- 1) See drawing SK-1 in "Appendix A – Structure Profile Sheet" for further details.
- 2) South Mast

Table 2 – Existing and Reserved Antenna and Cable Information¹

| Mounting Level (feet) | Center Line Elevation (feet) | Number of Antennas | Antenna Manufacturer | Antenna Model | Number of Feed Lines | Feed Line Size (inches) | Note |
|-----------------------|------------------------------|--------------------|----------------------|------------------------|----------------------|-------------------------|------|
| 114 | 114 | 3 | RFS | APX16DWV-16DWV-S-E-A20 | 12 | 1-1/4 | 3 |
| 114 | 114 | - | - | - | 6 | 1-1/4 | 2 |
| 114 | 114 | 1 | Microfect | Tri-Sector Mount | - | - | 2 |
| 105 | 105 | 3 | KMW | AM-X-CD-14-65 | 6 | 1-1/4 | 2 |
| 105 | 105 | 3 | Powerwave | TTAW-07BP111-001 (TMA) | - | - | 2 |
| 105 | 105 | 1 | Microfect | Tri-Sector Mount | - | - | 2 |
| 104 | 104 | 3 | Powerwave | 7770 | 6 | 1-1/4 | 3 |
| 104 | 104 | 3 | Powerwave | TT19-08BP111-001 (TMA) | - | - | 3 |
| 104 | 104 | 1 | Microfect | Tri-Sector Mount | - | - | 3 |

Notes:

- 1) See drawing SK-1 in "Appendix A – Structure Profile Sheet" for further details.
- 2) South Mast
- 3) North Mast

Table 3 – Existing Electrical Utility Wire Information¹

| Wire Designation | Wire Type | Tension Angle (degrees) | Wind Span | | Weight Span | |
|------------------|-----------------------------------|-------------------------|-------------|--------------|-------------|--------------|
| | | | Back (feet) | Ahead (feet) | Back (feet) | Ahead (feet) |
| Shield Wire #1 | 0.438 Comp | 26 | 409 | 409 | 415 | 415 |
| Shield Wire #2 | OPGW-120 (6-Groove)-10/9 FOCAS | 26 | 409 | 409 | 415 | 415 |
| Conductor #1 | (12) 795.0 kcmil 45/7 ACSR (Tern) | 26 | 409 | 409 | 415 | 415 |

Notes:

- 1) Wire loads provided by the utility – See "Appendix B – Load Calculations" for further details.

Table 4a – Utility Tower Analysis - Load Case Information¹

| Load Case Name | Radial Ice (inches) | Wind Speed (mph) | Overload Capacity Factors | | | | Note |
|--------------------------|---------------------|------------------|---------------------------|------|--------------|--------|------|
| | | | Vertical | Wind | Wire Tension | | |
| | | | | | Long. | Trans. | |
| NESC 250B (Heavy) | 0.5 | 39.5 | 1.5 | 2.5 | 1.65 | 1.65 | - |
| NESC 250C (Extreme Wind) | 0 | 110 | 1.0 | 1.0 | 1.0 | 1.0 | 2 |
| NESC 250B (Broken) | 0.5 | 39.5 | 1.5 | 2.5 | 1.65 | 1.65 | |

Notes:

- 1) As per the requirements of NU Design Criteria Table, NESC C2-2007 – Construction Grade B, and ASCE 10-15, “Design of Latticed Steel Transmission Structures”.
- 2) Apply a 1.25 X Gust Response Factor to all telecommunication equipment projected above top of tower/pole and a 1.0 x Gust Response Factor to the tower/pole structure as per NU Design Criteria Table.

Table 4b – Antenna Mount Analysis - Load Case Information¹

| Load Case Name | Radial Ice (inches) | Wind Speed (mph) | Note |
|------------------------|---------------------|------------------|------|
| TIA/EIA – High Wind | 0 | 85 | - |
| TIA/EIA – Wind and Ice | 0.5 | 74 | 2 |

Notes:

- 1) As per the requirements of NU Design Criteria Table, TIA/EIA-222-F and AISC-ASD standards.
- 2) 75% of 85mph wind pressure

3) ANALYSIS PROCEDURE

Table 5 – Documents Provided

| Document | Remarks | Reference | Source |
|---------------------------------|---|-------------------------|------------|
| Structure Erection Drawings | Bethlehem Steel, 07/11/1958 | 01135-50006 (E5-E6) | Eversource |
| Structure Fabrication Drawings | Bethlehem Steel, 07/11/1958 | 01135-50006 (17-24, 32) | Eversource |
| Foundation Drawing | CL&P, 5/16/1958 | 01135-60003 (1) | Eversource |
| Construction Documents (CD's) | Atlantis Design Group, 06/27/2016 | CT11356C, Rev 0 | T-Mobile |
| RF Data Sheet | 793D Outdoor (Evolved from 3A), 6/23/16 | A&L Template 793D_3QP | T-Mobile |
| Previous SA Report | Natcomm Consulting Engineers, 7/9/2009 | 08174.CO.05 | Eversource |
| Previous SA Report | Centek Engineering, 6/10/2011 | 11021.CO34 | Eversource |
| Previous SA Report | Paul J Ford and Company, 1/14/2016 | 31215-0012.002 | PJF |
| Photos | N/A | N/A | Eversource |
| Structure Modification Drawings | PJF, 08/29/2016 | 31215-0025.002.6125 | PJF |

3.1) Analysis Method

Tower™ is a commercially available analysis software package made by Powerline Systems, Inc. Tower™ was used to create a three-dimensional model of the tower and calculate member stresses for various load cases. Equipment and wire load calculations were completed using Microsoft Excel or MathCAD and applied to the structure model as point loads. Load Calculations are included in Appendix B. Selected output from the analysis is included in Appendix C.

Risa-3D is a commercially available analysis software package made by Risa Technologies, LLC. For this analysis, Risa-3D was used to create a three dimensional model of the antenna mast and calculate member stresses and reactions for various load cases. Those reactions were then applied to the tower model as point loads. Equipment and wire load calculations were completed using Microsoft Excel or MathCAD and applied to the antenna mast and tower models as point loads. Load Calculations are included in Appendix B. Select output from the Risa-3D and Tower™ analyses are included in Appendix C.

The existing foundation has been analyzed for stability using MathCAD calculations.

3.2) Assumptions

1. The structure was built in accordance with the manufacturer's specifications.
2. The structure has been maintained in accordance with the manufacturer's specifications.
3. No allowance was made for any damaged, missing, or rusted members. The analysis assumes that no physical deterioration has occurred in any of the structural components and that all members have the same load carrying capacity as the day it was installed.
4. All bolts have been torqued to the snug-tight condition as defined by AISC.
5. No residual stresses exist due to incorrect tower erection.
6. All welds conform to the requirements of AWS D1.1.
7. The configuration of antennas, cables, mounts and other appurtenances are as specified in Tables 1 and 2 of this report and as per the referenced documents in Table 5.
8. The wind loads applied to the tower due to the antenna installations are based on the full projected area of all antenna equipment in all directions (i.e. no shielding used).
9. Pipe mast and utility tower will be in plumb condition.
10. Tower steel material assumed to be A7 with minimum yield stress of 33 ksi.
11. Tower bolts assumed to be 3/4" A394-55T with a minimum shear capacity of 13.6 kips.
12. The mount has been installed per the referenced documents.
13. The structure modifications included in Appendix A of this report have been installed.
14. No further modifications to the structure or mount have been made other than those referenced herein.

If any of the above assumptions are found to be inaccurate, invalid or incomplete, Paul J. Ford and Company shall be informed of these discrepancies to determine the validity of the conclusions stated in this report.

4) ANALYSIS RESULTS

The following table provides the maximum usages for each structure element type and the loading condition in which they occur:

Table 6 – Maximum Structure Element Usages^{1,2}

| Tower – Analysis | | | |
|--|--------------------|--------------------|-------------------|
| Element Type | Member Designation | Load Case | Usage (%) |
| Leg Members | 1P | SWR Broken: 250B | 72 |
| Vertical "X" Bracing / Diagonal Members | 54P | TCL Broken: 250B | 89 |
| Horizontal Members & Hangers | 130P | 250B: NESC Heavy | 87 |
| Tower – Supplemental Analysis – Direct Mount | | | |
| Element Type | | Load Case | Usage (%) |
| Leg Members Supporting Antenna Mounts | | 250C: Extreme Wind | 71 |
| Maximum Structure Element Usage = | | | 89 |
| Structure Result = | | | Sufficient |

Notes:

- 1) See "Appendix C – Computer Output" for further detailed information.
- 2) See "Appendix D – Supplemental Calculations" for calculations supporting the % capacity used.

Table 7 – Maximum Structure Foundation Usages

| Foundation Analysis | | |
|-----------------------------------|-----------|-------------------|
| | Load Case | Usage (%) |
| Uplift Check | Envelope | 48 |
| Bearing Check | Envelope | 55 |
| Overturning Check | Envelope | 66 |
| Maximum Foundation Usage = | | 66 |
| Foundation Result = | | Sufficient |

Notes:

- 1) See "Appendix D – Supplemental Calculations" for calculations supporting the % capacity used.

Table 8 – Maximum Antenna Mount Usages^{1,2}

| Antenna Mount – Analysis | | |
|--|---------------------|-------------------|
| Member | Load Case | Usage (%) |
| North Mast, Member M4, HSS 6x6x1/4 | TIA/EIA – High Wind | 90 |
| South Mast, Member M4, HSS 6x6x1/4 | TIA/EIA – High Wind | 73 |
| Mast Connection to CL&P Tower ³ | TIA/EIA – High Wind | 72 |
| Maximum Antenna Mount Usage = | | 90 |
| Antenna Mount Result = | | Sufficient |

Notes:

- 1) See "Appendix C – Computer Output" for further detailed information.
- 2) See "Appendix D – Supplemental Calculations" for calculations supporting the % capacity used.
- 3) 1/3 increase in allowable stress not used for connection to tower as per OTRM 059.

4.1) Requirements

Install the modifications included in Appendix A of this report.

5) CONCLUSION

The modified transmission tower has **sufficient** capacity to support the proposed equipment along with the existing wire loads described herein. The existing antenna mounts have sufficient capacity to support the proposed equipment described herein. The existing foundation has sufficient capacity to support the proposed equipment along with the existing wire loads described herein.

This analysis is presented based upon the assumptions listed herein and information provided by the utility and the wireless carrier. If the existing conditions are different than those presented here, Paul J. Ford and Company should be contacted to verify the validity of the conclusions presented here.

STANDARD CONDITIONS FOR FURNISHING OF PROFESSIONAL ENGINEERING SERVICES ON EXISTING STRUCTURES BY PAUL J. FORD AND COMPANY

- 1) It is the responsibility of the client to ensure that the information provided to Paul J. Ford and Company and used in the performance of our engineering services is correct and complete. All engineering services are performed on the basis that the information used is current and correct.
- 2) Paul J. Ford and Company has not performed a site visit to verify the details regarding structure or the antenna/coax loading. If the existing conditions are not as represented on the referenced drawings and/or documents, we should be contacted immediately to evaluate the significance of the deviation.
- 3) It is not possible to have all of the detailed information to perform a very thorough analysis of every sub-component of the structure. The structural analysis by Paul J. Ford and Company verifies the adequacy of the main structural members. Paul J. Ford and Company provides a limited scope of service in that we cannot verify the adequacy of every weld, bolt, plate connection, etc.
- 4) The structural integrity of the existing foundation can only be verified if exact foundation sizes and soil conditions are known. Paul J. Ford and Company will not accept any responsibility for the adequacy of the existing foundations unless the foundation sizes and a soils report are provided.
- 5) The structure has been analyzed according to the minimum design loads recommended by the codes referenced in this report. We do not imply to meet any other codes or requirements unless explicitly agreed in writing. If the owner or local or state agencies require a higher design wind speed or a higher ice load, Paul J. Ford and Company should be made aware of this requirement prior to the start of the project.
- 6) This analysis does not imply to meet any serviceability criteria such as deflections, twist, sway, etc. unless expressly agreed to in writing. If the owner or local or state agencies require a higher design wind load or specific serviceability requirements, Paul J. Ford and Company should be made aware of this requirement prior to the start of the project.
- 7) All Services are performed, results obtained, and recommendations made in accordance with generally accepted engineering principles and practices. Paul J. Ford and Company is not responsible for the conclusion, opinions and/or recommendations made by others based on the information we supply.

APPENDIX A

STRUCTURE PHOTOS / MOD DRAWING PACKAGE

South Mast



North Mast



MODIFIED 94'-0" TRANSMISSION TOWER CL&P TOWER #1102 LINE #1880

T-MOBILE CT356/CL&P TOWER - RT. 123 SITE #CT11356C

2 WILLRUSS STREET
NORWALK, FAIRFIELD COUNTY, CONNECTICUT
LAT: 41.12576° ; LONG: -73.43270°

PROJECT CONTACTS

STRUCTURE OWNER:
EVERSOURCE
CONTACT: ROBERT GRAY AT ROBERT.GRAY@EVERSOURCE.COM
PH: (860) 728-6125

CARRIER INFO:
T-MOBILE
CONTACT: SAM SIMONS AT SAM.SIMONS@T-MOBILE.COM
PH: (203) 482-5156

ENGINEER OF RECORD:
PJFMOD@PJFWEB.COM

THIS PROJECT INCLUDES THE FOLLOWING ITEMS

STRUCTURE REINFORCEMENT

| SHEET INDEX | |
|--------------|-----------------------------|
| SHEET NUMBER | DESCRIPTION |
| T-1 | TITLE SHEET |
| N-1 | GENERAL NOTES |
| MI-1 | MI CHECKLIST |
| S-1 | TOWER ELEVATION AND DETAILS |

DESIGN DATA - MOUNT

| | |
|---------------------------------|-----------------------------------|
| REFERENCE STANDARD | TIA/EIA-222-F NUSCO OTRM 059.1 |
| LOCAL CODE | 2003 IBC |
| BASIC WIND SPEED (FASTEST-MILE) | 85 MPH * |
| ICE THICKNESS | 0.5 IN |
| ICE WIND SPEED | 74 MPH |

* PER EXCEPTION IN NUSCO OTRM 059.1

DESIGN DATA - TOWER

| | |
|----------------------------------|-------------------------------|
| REFERENCE STANDARD | NESC 2007 NUSCO OTRM 059.1 |
| BASIC WIND SPEED (3-SECOND GUST) | 110 MPH |
| ICE THICKNESS | 0.5 IN |
| ICE WIND SPEED | 40 MPH |



CL&P TOWER #1102

LINE #1880
2 WILLRUSS STREET
NORWALK, FAIRFIELD COUNTY, CONNECTICUT
CT356/CL&P TOWER - RT. 123 SITE #CT11356C

PJF PAUL J. FORD & COMPANY
250 E Broad St, Ste 600 · Columbus, OH 43215
Phone 614.221.6679 www.pauljford.com

T-MOBILE
35 GRIFFIN ROAD SOUTH BLOOMFIELD, CONNECTICUT 06002

© Copyright 2016, by Paul J. Ford and Company. All Rights Reserved. This document and the data contained herein, is proprietary to Paul J. Ford and Company, issued in strict confidence and shall not, without the prior written permission of Paul J. Ford and Company, be reproduced, copied or used for any purpose other than the intended use for this specific project.

TITLE SHEET

T-1

SHEET NO. 1 OF 4

1. GENERAL NOTES

- 1.1. THE STRUCTURAL ANALYSIS ASSUMES THAT ALL TOWER COMPONENTS ARE IN BRAND-NEW CONDITION. NO ALLOWANCE WAS MADE FOR ANY DAMAGED, MISSING OR RUSTED MEMBERS. IF ANY OF THESE CONDITIONS ARE DISCOVERED, THE CONTRACTOR SHALL BRING THEM TO THE ATTENTION OF THE OWNERS REPRESENTATIVE. THESE DRAWINGS WERE PREPARED FROM INFORMATION AND DOCUMENTS PROVIDED BY OWNER. THE INFORMATION PROVIDED HAS NOT BEEN FIELD VERIFIED BY THE ENGINEER OF RECORD (EOR) FOR ACCURACY AND THEREFORE DISCREPANCIES BETWEEN THESE DRAWINGS AND ACTUAL SITE CONDITIONS SHOULD BE ANTICIPATED. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS AND COORDINATE WITH THE AVAILABLE SOURCES OF INFORMATION ABOVE AND WITH THE PROJECT DRAWINGS BEFORE PROCEEDING WITH THE WORK. CONTRACTOR SHALL IMMEDIATELY REPORT ANY AND ALL DISCREPANCIES TO THE EOR AND OWNER FIELD PERSONNEL BEFORE PROCEEDING WITH THE WORK.
- 1.3. IF MATERIALS, QUANTITIES, STRENGTHS OR SIZES INDICATED BY THE DRAWINGS OR SPECIFICATIONS ARE NOT IN AGREEMENT WITH THESE NOTES, THE BETTER QUALITY AND/OR GREATER QUANTITY, STRENGTH OR SIZE INDICATED, SPECIFIED OR NOTED SHALL BE PROVIDED.
- 1.4. THIS STRUCTURE IS DESIGNED TO BE SELF-SUPPORTING AND STABLE AFTER THE INSTALLATION OF THE MODIFICATIONS DESCRIBED HEREIN. IT IS THE CONTRACTOR'S SOLE RESPONSIBILITY TO ENSURE THE SAFETY AND STABILITY OF THE STRUCTURE AND ITS COMPONENT PARTS DURING FIELD MODIFICATIONS. THIS INCLUDES, BUT IS NOT LIMITED TO, THE ADDITION OF WHATEVER TEMPORARY BRACING, GUYS OR TIE DOWNES TO, ERECTION PLANS, RIGGING PLANS, CLIMBING PLANS AND RESCUE PLANS SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR MEANS AND METHODS, INCLUDING BUT NOT LIMITED TO, ERECTION PLANS, RIGGING PLANS, CLIMBING PLANS AND RESCUE PLANS SHALL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR RESPONSIBLE FOR THE EXECUTION OF THE WORK CONTAINED HEREIN AND SHALL MEET OSHA AND GENERAL INDUSTRY STANDARDS.
- 1.6. OBSERVATION VISITS TO THE SITE BY OWNER AND/OR THE EOR SHALL NOT INCLUDE INSPECTIONS OF THE PROTECTIVE MEASURES OR THE CONSTRUCTION PROCEDURES. ANY SUPPORT SERVICES PERFORMED BY THE EOR DURING CONSTRUCTION ARE SOLELY FOR THE PURPOSE OF ASSISTING IN QUALITY CONTROL AND IN ACHIEVING GENERAL CONFORMANCE WITH CONTRACT DOCUMENTS. THEY DO NOT GUARANTEE CONTRACTOR'S PERFORMANCE AND SHALL NOT BE CONSTRUED AS SUPERVISION OF CONSTRUCTION.
- 1.8. ALL MATERIALS AND EQUIPMENT FURNISHED SHALL BE NEW AND OF GOOD QUALITY, FREE FROM FAULTS AND DEFECTS AND IN CONFORMANCE WITH THE CONTRACT DOCUMENTS. ANY AND ALL SUBSTITUTIONS MUST BE PROPERLY APPROVED AND AUTHORIZED IN WRITING BY OWNER AND EOR PRIOR TO INSTALLATION. THE CONTRACTOR SHALL FURNISH SATISFACTORY EVIDENCE AS TO THE KIND AND QUALITY OF MATERIALS AND EQUIPMENT BEING SUBSTITUTED.
- 1.9. THE CONTRACTOR SHALL BE RESPONSIBLE FOR INITIATING, MAINTAINING, AND SUPERVISING ALL SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK AND REGULATIONS GOVERNING THIS WORK AS WELL AS OWNER SAFETY GUIDELINES.
- 1.10. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING ALL EXISTING AND NEW EQUIPMENT WITH THE INSTALLATION OF THE MODIFICATION SYSTEM WILL HAVE TO BE REMOVED AND RELOCATED, REPLACED, OR RE-INSTALLED AS REQUIRED AFTER THE MODIFICATION IS SUCCESSFULLY COMPLETED. THE CONTRACTOR SHALL IDENTIFY AND COORDINATE THESE ITEMS PRIOR TO CONSTRUCTION WITH OWNER, TESTING AGENCY, AND EOR.
- 1.12. THE CLIMBING FACILITIES, SAFETY CLIMB AND ALL PARTS THEREOF SHALL NOT BE IMPEDED, MODIFIED OR ALTERED WITHOUT THE EXPRESS APPROVAL OF THE EOR.

2. STRUCTURAL STEEL

- 2.1. SHOP DRAWINGS SHALL BE SUBMITTED TO ENGINEER FOR APPROVAL. DRAWINGS MUST BEAR THE CHECKERS INITIALS BEFORE SUBMITTING TO ENGINEER. CONTRACTOR SHALL REVIEW THE SHOP DRAWINGS FOR GENERAL CONFORMANCE TO THE PLANS PRIOR TO SUBMITTING TO ENGINEER. SHOP DRAWINGS SHALL INCLUDE ERECTION DRAWINGS, ELEVATIONS AND SECTIONS. SHOP DRAWINGS SHALL ALSO INCLUDE SECTION PROFILES, SIZES, CONNECTIONS, ATTACHMENTS, REINFORCING, ANCHORAGE SIZE AND TYPE OF FASTENERS AND ASSEMBLIES.
- 2.2. BY THE AMERICAN SOCIETY OF CIVIL ENGINEERS:
 - 2.2.1. "SPECIFICATION FOR STRUCTURAL STEEL BUILDINGS."
 - 2.2.1.1. "SPECIFICATION FOR STRUCTURAL JOINTS USING ASTM HIGH STRENGTH BOLTS;" AS APPROVED BY THE RESEARCH COUNCIL ON STRUCTURAL CONNECTIONS.
 - 2.2.1.2. "CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES"
 - 2.2.2. "BY THE AMERICAN WELDING SOCIETY (AWS):"
 - 2.2.2.1. "STRUCTURAL WELDING CODE - STEEL D1.1."
 - 2.2.2.2. "STANDARD SYMBOLS FOR WELDING, BRAZING, AND NONDESTRUCTIVE EXAMINATION"
 - 2.2.3. "BY THE AMERICAN SOCIETY OF CIVIL ENGINEERS:
 - 2.2.3.1. "DESIGN OF LATTICED STEEL TRANSMISSION STRUCTURES (ASCE 10-XX)"
 - 2.2.3.2. "DESIGN OF STEEL TRANSMISSION POLE STRUCTURES (ASCE 48-XX)"
- 2.3. NEW STEEL (UNLESS NOTED OTHERWISE) SHALL CONFORM TO THE REQUIREMENTS OF THE ASTM STANDARD SPECIFICATION FOR STRUCTURAL STEEL AS NOTED BELOW:
 - M, S, C, L, PLATES & BARS - ASTM A36 (36 KSI YIELD POINT MATERIAL)
 - HSS RECTANGULAR - ASTM A500, GRADE B (46 KSI YIELD POINT MATERIAL)
 - HSS ROUND - ASTM A500, GRADE B (42 KSI YIELD POINT MATERIAL)
 - PIPE - ASTM A53, GRADE B (35 KSI YIELD POINT MATERIAL)
- 2.4. NEW BOLTS SHALL CONFORM TO THE REQUIREMENTS OF ASTM A325, TYPE "X" UNLESS NOTED OTHERWISE. ALL HOLES FOR BOLTS SHALL BE 1/16" LARGER THAN THE BOLT DIAMETER WITH AN EDGE DISTANCE OF AT LEAST 1 3/4 TIMES THE BOLT DIAMETER AND A SPACING OF AT LEAST 3 TIMES THE BOLT DIAMETER UNLESS NOTED OTHERWISE. ALL BOLTS SHALL BE PROVIDED WITH LOCK WASHERS, PALNUTS, OR LOCK NUTS.
- 2.5. ALL STRUCTURAL BOLTS SHALL BE INSTALLED AND TIGHTENED TO A SNUG TIGHT CONDITION ACCORDING TO THE REQUIREMENTS OF THE AISC 'SPECIFICATION FOR STRUCTURAL JOINTS USING HIGH-STRENGTH BOLTS' UNLESS NOTED OTHERWISE.
- 2.6. ALL U-BOLTS SHALL BE A307 UNLESS NOTED OTHERWISE.
- 2.7. ANY MATERIAL OR WORKMANSHIP WHICH IS OBSERVED TO BE DEFECTIVE OR INCONSISTENT WITH THE CONTRACT DOCUMENTS SHALL BE CORRECTED, MODIFIED, OR REPLACED AT THE CONTRACTOR'S EXPENSE.
- 2.8. WELDED CONNECTIONS SHALL CONFORM TO THE LATEST REVISED CODE OF THE AMERICAN WELDING SOCIETY, AWS D1.1. ALL WELD ELECTRODES SHALL BE E70XX UNLESS NOTED OTHERWISE ON THE DRAWINGS.
- 2.9. ALL WELDED CONNECTIONS SHALL BE MADE BY WELDERS CERTIFIED BY AWS. CONTRACTOR SHALL SUBMIT WELDERS' CERTIFICATION AND QUALIFICATION DOCUMENTATION TO OWNER'S TESTING AGENCY FOR REVIEW AND APPROVAL PRIOR TO CONSTRUCTION.
- 2.10. ALL SURFACES MUST BE CLEAN AND FREE OF WELD SPATTER. ALL EDGES SHALL BE DEBURRED.
- 2.11. ALL PARTS ARE TO BE MARKED WITH ITEM NUMBERS USING 3/4" HIGH STEEL STENCILS.
- 2.12. SHOP SHALL ASSEMBLE AND VERIFY FIT AND GAPS BEFORE BREAKDOWN FOR GALVANIZING.
- 2.13. NO FIELD WELDING SHALL BE DONE TO THE EXISTING STRUCTURE.
- 2.14. FIELD CUTTING OF STEEL:
 - 2.14.1. IMPORTANT CUTTING SAFETY GUIDELINES: THE CONTRACTOR SHALL FOLLOW ALL OWNER CUTTING, FIRE PREVENTION AND SAFETY GUIDELINES. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL OBTAIN A COPY OF THE CURRENT OWNER GUIDELINES. ANY DAMAGE TO THE COAX CABLES, AND/OR OTHER EQUIPMENT AND/OR THE STRUCTURE, RESULTING FROM THE CONTRACTOR'S ACTIVITIES SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE. THE INSPECTION/TESTING AGENCY SHALL CLOSELY AND CONTINUOUSLY MONITOR THIS ACTIVITY.
 - 2.14.2. ALL REQUIRED CUTS SHALL BE CUT WITHIN THE DIMENSIONS SHOWN ON THE DRAWINGS. NO CUTS SHALL EXTEND BEYOND THE OUTLINE OF THE DIMENSIONS SHOWN ON THE DRAWINGS. ALL CUT EDGES SHALL BE GROUND SMOOTH AND DE-BURRED. CONTRACTOR TO AVOID 90 DEGREE CORNERS. IT MAY BE NECESSARY TO DRILL STARTER HOLES AS REQUIRED TO MAKE THE CUTS.
 - 2.14.3. FIELD HOLES SHALL BE PUNCHED OR DRILLED. BURNING OF MEMBERS SHALL NOT BE PERMITTED.

3. BASE PLATE GROUT

- 3.1. NEW GROUT FOR THE POLE BASE SHALL BE NON-SHRINK, NON-METALLIC, GROUT (NS GROUT) BY EUCLID, OR APPROVED EQUAL, WITH A 7500 PSI MINIMUM COMPRESSIVE STRENGTH. CONTRACTOR SHALL SUBMIT PROPOSED GROUT SPECIFICATION INFORMATION TO OWNER FOR REVIEW AND APPROVAL PRIOR TO CONSTRUCTION. CONTRACTOR SHALL FOLLOW GROUT MANUFACTURER'S SPECIFICATIONS FOR COLD WEATHER GROUTING PROCEDURES (IF NECESSARY) AND THE TESTING AGENCY SHALL PREPARE GROUT SAMPLE SPECIMENS FOR COMPRESSIVE STRENGTH TESTING AND VERIFICATION.

- 3.2. GROUT SHALL BE INSTALLED TIGHT UNDER THE BASE PLATE AND BEARING PLATE REGION WITH NO VOIDS REMAINING BETWEEN THE TOP OF THE EXISTING CONCRETE AND THE UNDERSIDE OF THE EXISTING BASE PLATE AND BEARING PLATE.
- 3.3. CAULK AROUND ANCHOR RODS WHEN GROUTING.

4. FOUNDATION WORK

- 4.1. THE CONTRACTOR SHALL PROTECT THE EXISTING STRUCTURE, AS WELL AS ANY OTHER NEARBY EXISTING FOUNDATIONS FOR OTHER STRUCTURES OR EQUIPMENT, FROM LOSS OF SOIL AROUND AND/OR BENEATH FOOTINGS DURING ANY EXCAVATION. THE CONTRACTOR SHALL BRACE THE SITES OF THE OPEN EXCAVATION AS REQUIRED. THE EFFECT OF ADDITIONAL EXCAVATION FOR FOUNDATION AUGMENTATION AND REINFORCING, WHERE REQUIRED, MAY HAVE IMPACT ON EXISTING EQUIPMENT AND/OR OTHER EXISTING STRUCTURES NEAR THE EXCAVATION. THE EOR HAS NOT BEEN PROVIDED WITH ANY SPECIFIC INFORMATION OR DETAILS REGARDING EXISTING EQUIPMENT OR OTHER EXISTING STRUCTURES ON THE SITE. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO DETERMINE THE EFFECT THAT ANY EXCAVATION WORK HAS ON EXISTING NEARBY EQUIPMENT AND/OR STRUCTURES. CONTRACTOR SHALL OBTAIN THIS SITE-SPECIFIC INFORMATION WITH OWNER AND THE TESTING AGENCY PRIOR TO CONSTRUCTION AND FOUNDATION WORK. AFTER OBTAINING THE PRIOR WRITTEN PERMISSION OF OWNER, THE CONTRACTOR SHALL ADEQUATELY BRACE, SHORE, AND/OR RELOCATE THE INTERFERING EXISTING NEARBY EQUIPMENT AND/OR STRUCTURES AS NECESSARY.

5. CAST-IN-PLACE CONCRETE

- 5.1. CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 4000 PSI AT 28 DAYS.
- 5.2. CONCRETE EXPOSED TO WEATHER SHALL BE AIR ENTRAINED (6% +/- 1.5%).
- 5.3. WATER CEMENT RATION = 0.45 (MAXIMUM).
- 5.4. ALL REINFORCING STEEL SHALL BE NEW DOMESTIC DEFORMED BILLET STEEL CONFORMING TO ASTM A615 GRADE 60.
- 5.5. ALL CONCRETE WORK SHALL BE IN ACCORDANCE WITH "THE BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE" ACI 318, LATEST EDITION. CONTRACTOR SHALL FOLLOW ALL APPLICABLE ACI PROCEDURES FOR COLD WEATHER AND HOT WEATHER CONCRETE PLACEMENT.
- 5.6. ALL REINFORCING DETAILS SHALL CONFORM TO 'DETAILS AND DETAILING OF CONCRETE REINFORCING' ACI 315, LATEST EDITION, UNLESS DETAILED OTHERWISE ON THE DRAWINGS.
- 5.7. CONTRACTOR SHALL VERIFY LOCATIONS OF ALL OPENINGS, SLEEVES, ANCHOR RODS, INSERTS, ETC., AS REQUIRED BEFORE CONCRETE IS PLACED.
- 5.8. WHERE BAR LENGTHS ARE GIVEN ON THE DRAWINGS, THE LENGTH OF ANY HOOK, IF REQUIRED, IS NOT INCLUDED.
- 5.9. CONTRACTOR SHALL PROVIDE SPACERS, CHAIRS, BOLSTERS, ETC., NECESSARY TO SUPPORT REINFORCING STEEL. CHAIRS WHICH BEAR ON EXPOSED CONCRETE SURFACES SHALL HAVE ENDS WHICH ARE PLASTIC TIPPED OR STAINLESS STEEL.
- 5.10. ALL STRUCTURAL MEMBERS SHALL BE POURED MONOLITHICALLY, EXCEPT FOR REQUIRED CONSTRUCTION JOINTS. CONTRACTOR SHALL SUBMIT PROPOSED CONSTRUCTION JOINT LOCATIONS AND DETAILS TO THE EOR FOR REVIEW.
- 5.11. CONTRACTOR SHALL PROVIDE 1/2-INCH CHAMFER ON ALL EXPOSED CORNERS UNLESS OTHERWISE INDICATED ON THE DRAWINGS. MINIMUM CLEARANCES FOR REINFORCING STEEL SHALL BE MAINTAINED AS SPECIFIED BY ACI.
- 5.12. THE FOLLOWING MINIMUM CONCRETE COVER SHALL BE PROVIDED FOR REINFORCEMENT:
 - 3"..... CONCRETE CAST AGAINST AND PERMANENTLY EXPOSED TO EARTH.
 - 2"..... CONCRETE EXPOSED TO EARTH OR WEATHER, #6 THROUGH #18 BARS.
 - 1-1/2"..... CONCRETE EXPOSED TO EARTH OR WEATHER, #5 BAR AND SMALLER.
- 5.13. FOOTING BARS SHALL BE BENT 1'-0" AROUND CORNERS, OR PROVIDE CORNER BARS WITH A 2'-0" LAP ON EACH LEG.
- 5.14. TESTING LABORATORY SHALL SUBMIT ONE COPY OF ALL CONCRETE TEST REPORTS DIRECTLY TO THE EOR.
- 5.15. CONTRACTOR SHALL KEEP A COPY OF "FIELD REFERENCE MANUAL" (ACI PUBLICATION SP-15, LATEST EDITION) AT THE PROJECT FIELD OFFICE.
- 5.16. FLY ASH SHALL BE PERMITTED. FLY ASH CONTENT SHALL BE A MAXIMUM OF 25% OF CEMENT WEIGHT.

6. EPOXY GROUTED REINFORCING ANCHOR RODS

- 6.1. UNLESS OTHERWISE NOTED, REINFORCING ANCHOR RODS SHALL BE 150 KSI ALL-THREAD BARS CONFORMING TO ASTM A722. RECOMMENDED MANUFACTURERS/SUPPLIERS OF 150 KSI ALL-THREAD BARS ARE WILLIAMS FORM ENGINEERING CORPORATION AND DYWIDAG SYSTEMS INTERNATIONAL.
- 6.2. ALL REINFORCING ANCHOR RODS SHALL BE HOT DIP GALVANIZED PER ASTM A123. ALTERNATIVELY, ALL REINFORCING ANCHOR RODS MAY BE EPOXY COATED PER ASTM A775.
- 6.3. THE CORE-DRILLED HOLES IN THE CONCRETE FOR THE ANCHOR RODS SHALL BE CLEAN AND DRY, AND OTHERWISE PROPERLY PREPARED ACCORDING TO THE ANCHOR ROD AND EPOXY MANUFACTURER'S INSTRUCTIONS. PRIOR TO PLACEMENT OF ANCHOR RODS AND EPOXY, CONTRACTOR SHALL FOLLOW ALL ANCHOR ROD AND EPOXY MANUFACTURER RECOMMENDATIONS REGARDING HANDLING OF RODS, EPOXY, ACCEPTABLE AMBIENT TEMPERATURE RANGE DURING INSTALLATION AND POST-INSTALLATION CURING. THE EFFECT OF TEMPERATURE ON EPOXY CURING TIME, PREPARATION OF HOLE, ETC.
- 6.4. HIT/ HIT RE-500 SD OR ITW RED HEAD EPOX ON G5 EPOXY SHALL BE USED TO ANCHOR THE BAR IN THE DRILL HOLES. IF THE DESIGNED EMBEDMENT IS GREATER THAN 12 FT, CONTRACTOR HAS THE OPTION TO USE PILE ANCHOR GROUT BY E-CHEM AS AN ALTERNATE. IF CONTRACTOR WISHES TO USE A DIFFERENT EPOXY, A REQUEST INCLUDING THE EPOXY TECHNICAL DATA SHEET(S) SHALL BE SUBMITTED TO THE EOR FOR REVIEW PRIOR TO CONSTRUCTION.
- 6.5. ONCE THE REINFORCING ANCHOR RODS HAVE BEEN INSTALLED AND ALL EPOXY AND GROUT HAVE CURED (IF BASE PLATE AND/OR BEARING PLATES HAVE BEEN GROUTED PRIOR TO TESTING), ALL REINFORCING ANCHORS SHALL BE LOAD TESTED. REFER TO THE NEW ANCHOR & BRACKET DETAIL ON FOLLOWING SHEETS FOR SPECIFIED ANCHOR ROD TARGET TENSION LOAD.
- 6.6. ONCE THE REINFORCING ANCHOR RODS HAVE BEEN SUCCESSFULLY LOAD TESTED AND APPROVED THE CONTRACTOR SHALL TIGHTEN ALL HEAVY HEX ANCHOR NUTS TO SNUG TIGHT PLUS 1/8 TURN OF NUT.

7. TOUCH UP OF GALVANIZING

- 7.1. THE CONTRACTOR SHALL TOUCH UP ANY AND ALL AREAS OF GALVANIZING ON THE EXISTING STRUCTURE OR NEW COMPONENTS THAT ARE DAMAGED OR ABRADED DURING CONSTRUCTION. GALVANIZED SURFACES DAMAGED DURING TRANSPORTATION OR ERECTION AND ASSEMBLY AS WELL AS ANY AND ALL ABRASIONS, CUTS AND FIELD DRILLING SHALL BE TOUCHED UP WITH TWO (2) COATS OF ZRC COLD GALVANIZING COMPOUND. FILM THICKNESS PER COAT SHALL BE: WET 3.0 MILS; DRY 1.5 MILS. APPLY PER ZRC (MANUFACTURER) RECOMMENDED PROCEDURES. CONTACT ZRC AT 1-800-831-3275 FOR PRODUCT INFORMATION.
- 7.2. CONTRACTOR SHALL CLEAN AND PREPARE ALL FIELD WELDS ON GALVANIZED AND PRIME PAINTED SURFACES FOR TOUCH-UP COATING IN ACCORDANCE WITH AWS D1.1. OWNER'S TESTING AGENCY SHALL VERIFY THE PREPARED SURFACE PRIOR TO APPLICATION OF THE TOUCH-UP COATING.
- 7.3. OWNER'S TESTING AGENCY SHALL TEST AND VERIFY THE COATING THICKNESS AFTER THE CONTRACTOR HAS APPLIED THE ZRC COLD GALVANIZING COMPOUND AND IT HAS SUFFICIENTLY DRIED. AREAS FOUND TO BE ADEQUATELY COATED, SHALL BE RE-COATED BY THE CONTRACTOR AND RE-TESTED BY THE TESTING AGENCY.

8. HOT-DIP GALVANIZING

- 8.1. HOT-DIP GALVANIZE ALL STRUCTURAL STEEL MEMBERS AND ALL STEEL ACCESSORIES, BOLTS, WASHERS, ETC. PER ASTM A123, ASTM A386 OR PER ASTM A153, AS APPROPRIATE.
- 8.2. PROPERLY PREPARE STEEL ITEMS FOR GALVANIZING.
- 8.3. DRILL OR PUNCH WEEP AND/OR DRAINAGE HOLES WITH EOR APPROVAL OF LOCATIONS.
- 8.4. ALL GALVANIZING SHALL BE DONE AFTER FABRICATION IS COMPLETED AND PRIOR TO FIELD INSTALLATION.

9. PERPETUAL INSPECTION AND MAINTENANCE BY THE OWNER

- 9.1. AFTER THE CONTRACTOR HAS SUCCESSFULLY COMPLETED THE INSTALLATION OF THE MODIFICATION SYSTEM AND THE WORK HAS BEEN ACCEPTED BY OWNER, OWNER WILL BE RESPONSIBLE FOR THE LONG TERM AND PERPETUAL INSPECTION AND MAINTENANCE OF THE STRUCTURE AND MODIFICATION SYSTEM.



RPF PAUL J. FORD & COMPANY
250 E Broad St, Ste 600 · Columbus, OH 43215
Phone 614.221.6679 www.poufford.com
T-MOBILE
35 GRIFIN ROAD SOUTH BLOOMFIELD, CONNECTICUT 06002

© Copyright 2016, by Paul J. Ford and Company. All Rights Reserved. This document and the data contained herein, is proprietary to Paul J. Ford and Company, issued in strict confidence and shall not, without the prior written permission of Paul J. Ford and Company, be reproduced, copied or used for any purpose other than the intended use for this specific project.

CL&P TOWER #1102
LINE #1880
2 WILLRUSS STREET
NORWALK, FAIRFIELD COUNTY, CONNECTICUT
CT356/CL&P TOWER - RT. 123 SITE #CT11356C

PROJECT No: 31216-0025.002.6125
DRAWN BY: FE
DESIGNED BY: JRA
CHECKED BY: C&P
DATE: 8-29-2016

GENERAL NOTES

N-1
SHEET NO. 2 OF 4

MODIFICATION INSPECTION NOTES:

1. **INSPECTION AND TESTING**
 - 1.1. INSPECTION SERVICES WHICH ARE FURNISHED BY OTHERS ARE STILL REQUIRED WHEN THE EOR PERFORMS SUPPORT SERVICES DURING CONSTRUCTION.
 - 1.2. OBSERVED DISCREPANCIES BETWEEN THE WORK AND THE CONTRACT DOCUMENTS SHALL BE CORRECTED BY THE CONTRACTOR AT NO ADDITIONAL COST.
 - 1.3. AN INDEPENDENT QUALIFIED INSPECTOR/TESTING AGENCY SHALL BE SELECTED, RETAINED AND PAID FOR BY OWNER FOR THE SOLE PURPOSE OF INSPECTING, TESTING, DOCUMENTING, AND APPROVING ALL WELDING AND FIELD WORK PERFORMED BY THE CONTRACTOR.
 - 1.3.1. ACCESS TO ANY PLACE WHERE WORK IS BEING DONE SHALL BE PERMITTED AT ALL TIMES.
 - 1.3.2. THE INSPECTION AGENCY SHALL SO SCHEDULE THIS WORK AS TO CAUSE A MINIMUM OF INTERRUPTION TO AND COORDINATE WITH THE WORK IN PROGRESS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE THE WORK SCHEDULE WITH THE TESTING AGENCY. THE CONTRACTOR SHALL ALLOW FOR ADEQUATE TIME AND ACCESS FOR THE TESTING AGENCY TO PERFORM THEIR DUTIES.
- 1.4. **GENERAL**
 - 1.4.1. PERFORM PERIODIC ON-SITE OBSERVATION, INSPECTION, VERIFICATION, AND TESTING DURING THE TIME THE CONTRACTOR IS WORKING ON-SITE. AGENCY SHALL NOTIFY OWNER AND THE EOR IMMEDIATELY WHEN FIELD PROBLEMS OR DISCREPANCIES OCCUR.
- 1.5. **FOUNDATIONS AND SOIL PREPARATION**
 - 1.5.1. VERIFY MATERIALS AT BOTTOM OF EXCAVATION ARE ADEQUATE TO ACHIEVE THE DESIGN BEARING CAPACITY.
 - 1.5.2. VERIFY THAT EXCAVATIONS HAVE EXTENDED TO PROPER DEPTH AND ARE FOUNDED ON PROPER MATERIAL.
 - 1.5.3. PERFORM CLASSIFICATION AND TESTING OF COMPACTED FILL MATERIALS AS SPECIFIED.
 - 1.5.4. VERIFY USE OF PROPER MATERIALS, DENSITIES AND LIFT THICKNESS DURING PLACEMENT AND COMPACTION OF COMPACTED FILL.
 - 1.5.5. PRIOR TO PLACEMENT OF COMPACTED FILL, OBSERVE SUBGRADE AND VERIFY SITE HAS BEEN PREPARED PROPERLY.
- 1.6. **CONCRETE TESTING PER ACI**
 - 1.6.1. INSPECT PLACEMENT OF REINFORCING STEEL.
 - 1.6.2. INSPECT BOLTS TO BE INSTALLED IN CONCRETE PRIOR TO AND DURING PLACEMENT OF CONCRETE.
 - 1.6.3. VERIFY USE OF REQUIRED MIX DESIGN.
 - 1.6.4. AT THE TIME FRESH CONCRETE IS SAMPLED FABRICATE SPECIMENS FOR STRENGTH TEST, PERFORM SLUMP AND AIR CONTENT TEST AND DETERMINE TEMPERATURE OF THE CONCRETE.
 - 1.6.5. INSPECT CONCRETE PLACEMENT FOR PROPER APPLICATION TECHNIQUE.
 - 1.6.6. INSPECT SPECIFIED CURING AND TEMPERATURE TECHNIQUES.
- 1.7. **STRUCTURAL STEEL**
 - 1.7.1. CHECK STEEL ON THE JOB WITH THE PLANS.
 - 1.7.2. CHECK MILL CERTIFICATIONS. CALL FOR LABORATORY TEST REPORTS WHEN MILL CERTIFICATION IS IN QUESTION.
 - 1.7.3. CHECK GRADE OF STEEL MEMBERS, AND BOLTS FOR CONFORMANCE WITH DRAWINGS.
 - 1.7.4. INSPECT STEEL MEMBERS FOR DISTORTION, EXCESSIVE RUST, FLAWS AND BURNED HOLES.
 - 1.7.5. CHECK STEEL MEMBERS FOR SIZES, SWEEP AND DIMENSIONAL TOLERANCES.
 - 1.7.6. CHECK FOR SURFACE FINISH SPECIFIED, GALVANIZED.
 - 1.7.7. CHECK THAT BOLTS HAVE BEEN TIGHTENED PROPERLY.
 - 1.7.8. PRIOR TO ANY FIELD CUTTING THE CONTRACTOR SHALL MARK THE CUTOUT LINES ON THE STEEL AND THE INSPECTION/TESTING AGENCY SHALL VERIFY PROPOSED LAYOUT, LOCATION, AND DIMENSIONS. THE INSPECTION/TESTING AGENCY SHALL CLOSELY AND CONTINUOUSLY MONITOR THIS ACTIVITY.
- 1.8. **WELDING:**
 - 1.8.1. VERIFY FIELD WELDING PROCEDURES, WELDERS, AND WELDING OPERATORS, NOT DEEMED PREQUALIFIED, IN ACCORDANCE WITH AWS D1.1.
 - 1.8.2. INSPECT FIELD WELDED CONNECTIONS IN ACCORDANCE WITH THE REQUIREMENTS SPECIFIED AND WITH AWS D1.1.
 - 1.8.3. APPROVE FIELD WELDING SEQUENCE.
 - 1.8.4. INSPECT WELDED CONNECTIONS AS FOLLOWS AND IN ACCORDANCE WITH AWS D1.1:
 - 1.8.4.1. INSPECT WELDING EQUIPMENT FOR CAPACITY, MAINTENANCE, AND WORKING CONDITIONS.
 - 1.8.4.2. VERIFY SPECIFIED ELECTRODES AND HANDLING AND STORAGE OF ELECTRODES FOR CONFORMANCE TO SPECIFICATIONS.
 - 1.8.4.3. INSPECT PREHEATING AND INTERPASS TEMPERATURES FOR CONFORMANCE WITH AWS D1.1.
 - 1.8.4.4. VISUALLY INSPECT ALL WELDS AND VERIFY THAT QUALITY OF WELDS MEETS THE REQUIREMENTS OF AWS D1.1. OTHER TESTS MAY ALSO BE PERFORMED ON THE WELDS BY THE TESTING AGENCY IN ORDER FOR THEM TO PERFORM THEIR DUTIES FOR THIS PROJECT.
 - 1.8.4.5. SPOT TEST AT LEAST ONE FILLET WELD OF EACH MEMBER USING MAGNETIC PARTICLE.
 - 1.8.4.6. INSPECT FOR SIZE, SPACING, TYPE AND LOCATION AS PER APPROVED DRAWINGS.
 - 1.8.4.7. VERIFY THAT THE BASE METAL CONFORMS TO THE DRAWINGS.
 - 1.8.4.8. REVIEW THE REPORTS BY TESTING LABS.
 - 1.8.4.9. CHECK TO SEE THAT WELDS ARE CLEAN AND FREE FROM SLAG.
 - 1.8.4.10. INSPECT RUST PROTECTION OF WELDS AS PER SPECIFICATIONS.
 - 1.8.4.11. CHECK THAT DEFECTIVE WELDS ARE CLEARLY MARKED AND HAVE BEEN ADEQUATELY REPAIRED.
 - 1.8.4.12. FULL PENETRATION WELDS IN THE VICINITY OF THE BASE OF THE TOWER ARE REQUIRED TO BE 100% NDE INSPECTED BY UT IN ACCORDANCE WITH AWS D1.1.
 - 1.8.4.13. PARTIAL PENETRATION AND FILLET WELDS IN THE VICINITY OF THE BASE OF THE TOWER ARE REQUIRED TO BE 50% NDE INSPECTED BY WP IN ACCORDANCE WITH AWS D1.1.
- 1.9. **REPORTS:**
 - 1.9.1. COMPLETE AND PERIODICALLY SUBMIT DAILY INSPECTION REPORTS TO OWNER.
 - 1.9.2. THE INSPECTION PLAN OUTLINED HEREIN IS INTENDED AS A DESCRIPTION OF GENERAL AND SPECIFIC ITEMS OF CONCERN. IT IS NOT INTENDED TO BE ALL-INCLUSIVE. IT DOES NOT LIMIT THE TESTING AND INSPECTION AGENCY TO THE ITEMS LISTED. ADDITIONAL TESTING, INSPECTION, AND CHECKING MAY BE REQUIRED AND SHOULD BE ANTICIPATED. THE TESTING AGENCY SHALL USE THEIR PROFESSIONAL JUDGMENT AND KNOWLEDGE OF THE JOB SITE CONDITIONS AND THE CONTRACTOR'S PERFORMANCE TO DECIDE WHAT OTHER ITEMS REQUIRE ADDITIONAL ATTENTION. THE TESTING AGENCY'S JUDGMENT MUST PREVAIL ON ITEMS NOT SPECIFICALLY COVERED. ANY DISCREPANCIES OR PROBLEMS SHALL BE BROUGHT IMMEDIATELY TO OWNER'S ATTENTION. RESOLUTIONS ARE NOT TO BE MADE WITHOUT OWNER'S REVIEW AND SPECIFIC WRITTEN CONSENT. OWNER RESERVES THE RIGHT TO DETERMINE WHETHER OR NOT A RESOLUTION IS ACCEPTABLE.
 - 1.9.3. AFTER EACH INSPECTION, THE TESTING AGENCY WILL PREPARE A WRITTEN ACCEPTANCE OR REJECTION WHICH WILL BE GIVEN TO THE CONTRACTOR AND FILED AS DAILY REPORTS TO OWNER. THIS WRITTEN ACTION WILL GIVE THE CONTRACTOR A LIST OF ITEMS TO BE CORRECTED, PRIOR TO CONTINUING CONSTRUCTION, AND/OR LOADING OF STRUCTURAL ITEMS.
 - 1.9.4. THE TESTING AGENCY DOES NOT RELIEVE THE CONTRACTOR'S CONTRACTUAL OR STATUTORY OBLIGATIONS. THE CONTRACTOR HAS THE SOLE RESPONSIBILITY FOR ANY DEVIATIONS FROM THE OFFICIAL CONTRACT DOCUMENTS. THE TESTING AGENCY WILL NOT REPLACE THE CONTRACTOR'S QUALITY CONTROL PERSONNEL.

- 1.10. CORRECTION OF FAILING MTS
 - 1.10.1. IF THE MODIFICATION INSTALLATION WOULD FAIL THE MI ("FAILED MI"), THE GC SHALL WORK WITH THE OWNER TO COORDINATE A REMEDIATION PLAN IN ONE OF TWO WAYS:
 - 1.10.1.1. CORRECT FAILING ISSUES TO COMPLY WITH THE SPECIFICATIONS CONTAINED IN THE ORIGINAL CONTRACT DOCUMENTS AND COORDINATE A SUPPLEMENT MI.
 - OR, WITH THE OWNERS APPROVAL, THE GC MAY WORK WITH THE EOR TO RE-ANALYZE THE MODIFICATION/REINFORCEMENT USING THE AS-BUILT CONDITION

- 1.11. PHOTOGRAPHS
 - 1.11.1. BETWEEN THE GC AND THE MI INSPECTOR THE FOLLOWING PHOTOGRAPHS, AT A MINIMUM, ARE TO BE TAKEN AND INCLUDED IN THE MI REPORT:
 - 1.11.1.1. PRE-CONSTRUCTION GENERAL SITE CONDITION
 - 1.11.1.2. PHOTOGRAPHS DURING THE REINFORCEMENT MODIFICATION CONSTRUCTION/RESECTION AND INSPECTION
 - 1.11.2.1. RAW MATERIALS
 - 1.11.2.2. PHOTOS OF ALL CRITICAL DETAILS
 - 1.11.2.3. FOUNDATION MODIFICATIONS
 - 1.11.2.4. WELD PREPARATION
 - 1.11.2.5. BOLT INSTALLATION AND TORQUE
 - 1.11.2.6. FINAL INSTALLED CONDITION
 - 1.11.2.7. SURFACE COATING REPAIR
 - 1.11.3. POST CONSTRUCTION PHOTOGRAPHS
 - 1.11.3.1. FINAL INFIELD CONDITION
 - 1.11.2. PHOTOS OF ELEVATED MODIFICATIONS TAKEN FROM THE GROUND SHALL BE CONSIDERED INADEQUATE.

POST-MODIFICATION CHECKLIST

| REQUIRED | REPORT ITEM | BRIEF DESCRIPTION |
|----------|---|--|
| | PRE-CONSTRUCTION | |
| X | MI CHECKLIST DRAWING | THIS CHECKLIST SHALL BE INCLUDED IN THE MI REPORT |
| X | FOR APPROVED SHOP DRAWINGS | FABRICATOR DRAWINGS SHALL BE SUBMITTED TO THE ENGINEER OF RECORD FOR REVIEW. THE CONTRACTOR SHALL PROVIDE THE APPROVED SHOP DRAWINGS TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. |
| NA | FABRICATION INSPECTION | A LETTER FROM THE FABRICATOR STATING THAT THE WORK WAS PERFORMED IN ACCORDANCE WITH INDUSTRY STANDARDS AND THE CONTRACT DOCUMENTS SHALL BE PROVIDED TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. |
| NA | FABRICATOR CERTIFIED WELD INSPECTION | CRITICAL SHOP WELDS THAT REQUIRE TESTING ARE NOTED ON THESE CONTRACT DRAWINGS. A CERTIFIED WELD INSPECTOR SHALL PERFORM NON-DESTRUCTIVE TESTING AND A REPORT SHALL BE PROVIDED TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. |
| NA | MATERIAL TEST REPORT (MTR) | MILL CERTIFICATION SHALL BE PROVIDED FOR ALL STEEL WITH A YIELD STRENGTH GREATER THAN 36 KSI AND THIS DOCUMENTATION SHALL BE PROVIDED TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. |
| NA | FABRICATOR INDE INSPECTION | A VISUAL OBSERVATION OF A PORTION OF THE EXISTING STRUCTURE (AS NOTED ON THESE DRAWINGS) IS REQUIRED AND A WRITTEN REPORT SHALL BE PROVIDED TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. |
| NA | NDE REPORT OF MONOPOLE BASE PLATE (AS REQUIRED) | A VISUAL OBSERVATION OF THE POLE TO BASE PLATE CONNECTION IS REQUIRED AND A WRITTEN REPORT SHALL BE PROVIDED TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. |
| X | PACKING SLIPS | THE MATERIAL SHIPPING LIST SHALL BE PROVIDED TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. |
| | CONSTRUCTION | |
| X | CONSTRUCTION INSPECTIONS | A LETTER FROM THE GENERAL CONTRACTOR STATING THAT THE WORKMANSHIP WAS PERFORMED IN ACCORDANCE WITH INDUSTRY STANDARDS AND THESE CONTRACT DRAWINGS SHALL BE PROVIDED TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. |
| NA | FOUNDATION INSPECTIONS | A VISUAL OBSERVATION OF THE EXCAVATION AND REBAR SHALL BE PERFORMED BEFORE PLACING THE CONCRETE. A WRITTEN REPORT SHALL BE PROVIDED TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. |
| NA | CONCRETE COMP. STRENGTH AND SLUMP TESTS | THE CONCRETE MIX DESIGN, SLUMP TEST, AND COMPRESSIVE STRENGTH TESTS SHALL BE PROVIDED TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. |
| NA | POST INSTALLED ANCHOR ROD VERIFICATION | ANCHOR ROD INSTALLATION SHALL INCLUDE VERIFICATION BY LETTER AND PHOTOGRAPHIC DOCUMENTATION. |
| NA | BASE PLATE GROUT VERIFICATION | A LETTER FROM THE GENERAL CONTRACTOR SHALL BE PROVIDED TO THE MI INSPECTOR THAT CERTIFIES THAT THE GROUT WAS INSTALLED IN ACCORDANCE WITH SPECIFICATIONS FOR INCLUSION IN THE MI REPORT. |
| NA | CONTRACTOR'S CERTIFIED WELD INSPECTION | A CERTIFIED WELD INSPECTOR SHALL INSPECT AND TEST AS NECESSARY ALL FIELD WELDS AND A REPORT SHALL BE PROVIDED TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. PRE, DURING AND POST WELD INSPECTION IS REQUIRED. |
| NA | EARTHWORK LIFT AND DENSITY | FOUNDATION SUB-GRADES SHALL BE INSPECTED AND APPROVED BY A GEOTECHNICAL ENGINEER AND A REPORT SHALL BE PROVIDED TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. |
| X | ON SITE COLD GALVANIZING VERIFICATION | THE GENERAL CONTRACTOR SHALL PROVIDE DOCUMENTATION TO THE MI INSPECTOR VERIFYING THAT ANY ON-SITE COLD GALVANIZING WAS APPLIED IN ACCORDANCE WITH SPECIFICATIONS. |
| NA | GUY WIRE TENSION REPORT | THE GENERAL CONTRACTOR SHALL PROVIDE A REPORT TO THE MI INSPECTOR INDICATING THE TEMPERATURE AND TENSION IN EVERY GUY CABLE FOR INCLUSION IN THE MI REPORT. |
| X | GC AS-BUILT DOCUMENTS | THE GENERAL CONTRACTOR SHALL SUBMIT A COPY OF THE CONTRACT DRAWINGS EITHER STATING "INSTALLED AS DESIGNED" OR NOTING ANY CHANGES THAT WERE REQUIRED AND APPROVED BY THE ENGINEER OF RECORD DUE TO FIELD CONDITIONS. |
| NA | MICROPILE / ROCK ANCHOR | THE GENERAL CONTRACTOR SHALL PROVIDE INSTALLER'S DRILLING AND INSTALLATION LOGS AND QA/QC DOCUMENTATION TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. |
| | POST-CONSTRUCTION | |
| X | MI INSPECTOR REDLINE OR RECORD DRAWING(S) | THE MI INSPECTOR SHALL OBSERVE AND REPORT ANY DISCREPANCIES BETWEEN THE CONTRACTORS REDLINE DRAWING AND THE ACTUAL COMPLETED INSTALLATION. |
| NA | POST INSTALLED ANCHOR ROD PULL TESTING | POST INSTALLED ANCHOR RODS SHALL BE TESTED IN ACCORDANCE WITH SPECIFICATIONS AND A REPORT SHALL BE PROVIDED TO THE MI INSPECTOR FOR INCLUSION IN THE MI REPORT. |
| X | PHOTOGRAPHS | PHOTOGRAPHS SHALL BE SUBMITTED TO THE MI WHICH DOCUMENT ALL PHASES OF THE CONSTRUCTION. THE PHOTOS SHALL BE ORGANIZED IN A MANNER THAT EASILY IDENTIFIES THE EXACT LOCATION OF THE PHOTO. |
| NA | POST INSTALLED MICROPILE / ROCK ANCHOR TESTING | POST INSTALLED ANCHORS SHALL BE TESTED AND INSPECTED IN ACCORDANCE WITH SPECIFICATION STATED ON MICROPILE/ROCK ANCHOR NOTES. |

NOTE: X DENOTES A DOCUMENT NEEDED FROM THE CONTRACTOR FOR THE MI REPORT
NA DENOTES A DOCUMENT THAT IS NOT REQUIRED FOR THE MI REPORT

© Copyright 2016, by Paul J. Ford and Company
All Rights Reserved. This document and the data contained herein, is proprietary to Paul J. Ford and Company, issued in strict confidence and shall not, without the prior written permission of Paul J. Ford and Company, be reproduced, copied or used for any purpose other than the intended use for this specific project.

RJF PAUL J. FORD & COMPANY
250 E Broad St, Ste 600 - Columbus, OH 43215
Phone 614.221.6679 www.pauljford.com

T-MOBILE
35 GRIFFIN ROAD SOUTH BLOOMFIELD, CONNECTICUT 06002

CL&P TOWER #1102
LINE #1880
2 WILLRUSS STREET
NORWALK, FAIRFIELD COUNTY, CONNECTICUT
CT356/CL&P TOWER - RT. 123 SITE #CT11356C

PROJECT No: 31216-0025.002.6125
DRAWN BY: FE
DESIGNED BY: JRA
CHECKED BY: CBA
DATE: 8-26-2016

MI CHECKLIST AND NOTES

MI-1
SHEET NO. 3 OF 4



© Copyright 2016, by Paul J. Ford and Company, All Rights Reserved. This document and the data contained herein, is proprietary to Paul J. Ford and Company, issued in strict confidence and shall not, without the prior written permission of Paul J. Ford and Company, be reproduced, copied or used for any purpose other than the intended use for this specific project.

RJF PAUL J. FORD & COMPANY
 250 E Broad St, Ste 600 · Columbus, OH 43215
 Phone 614.221.6679 www.pauljford.com


T-MOBILE
 35 GRIFFIN ROAD SOUTH BLOOMFIELD, CONNECTICUT 06002

CL&P TOWER #1102
 LINE #1880
 2 WILLRUSS STREET
 NORWALK, FAIRFIELD COUNTY, CONNECTICUT
 CT356/CL&P TOWER - RT. 123 SITE #CT11356C


PROJECT No: 31216-0025.002.6125
 FE
 DRAWN BY: JRA
 DESIGNED BY: C&P
 CHECKED BY: C&P
 DATE: 8-28-2016

TOWER ELEVATIONS AND DETAILS

S-1
 SHEET NO. 4 OF 4






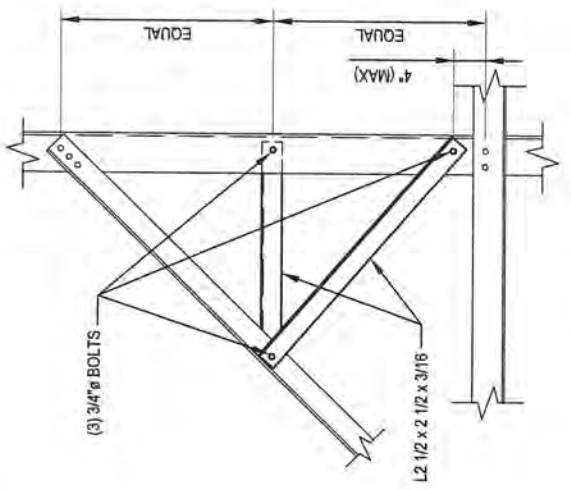


ELEVATION 2
 S-1

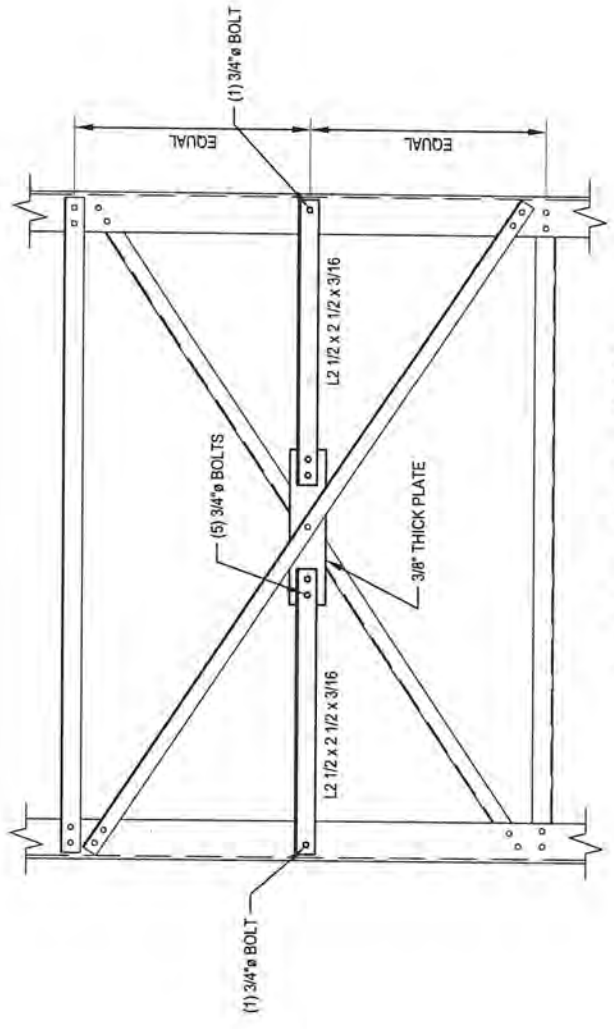

ELEVATION 3
 S-1

NOTE:
 ANTENNA MOUNT NOT SHOWN
 IN ELEVATIONS 2/S-1 AND 3/S-1
 FOR CLARITY

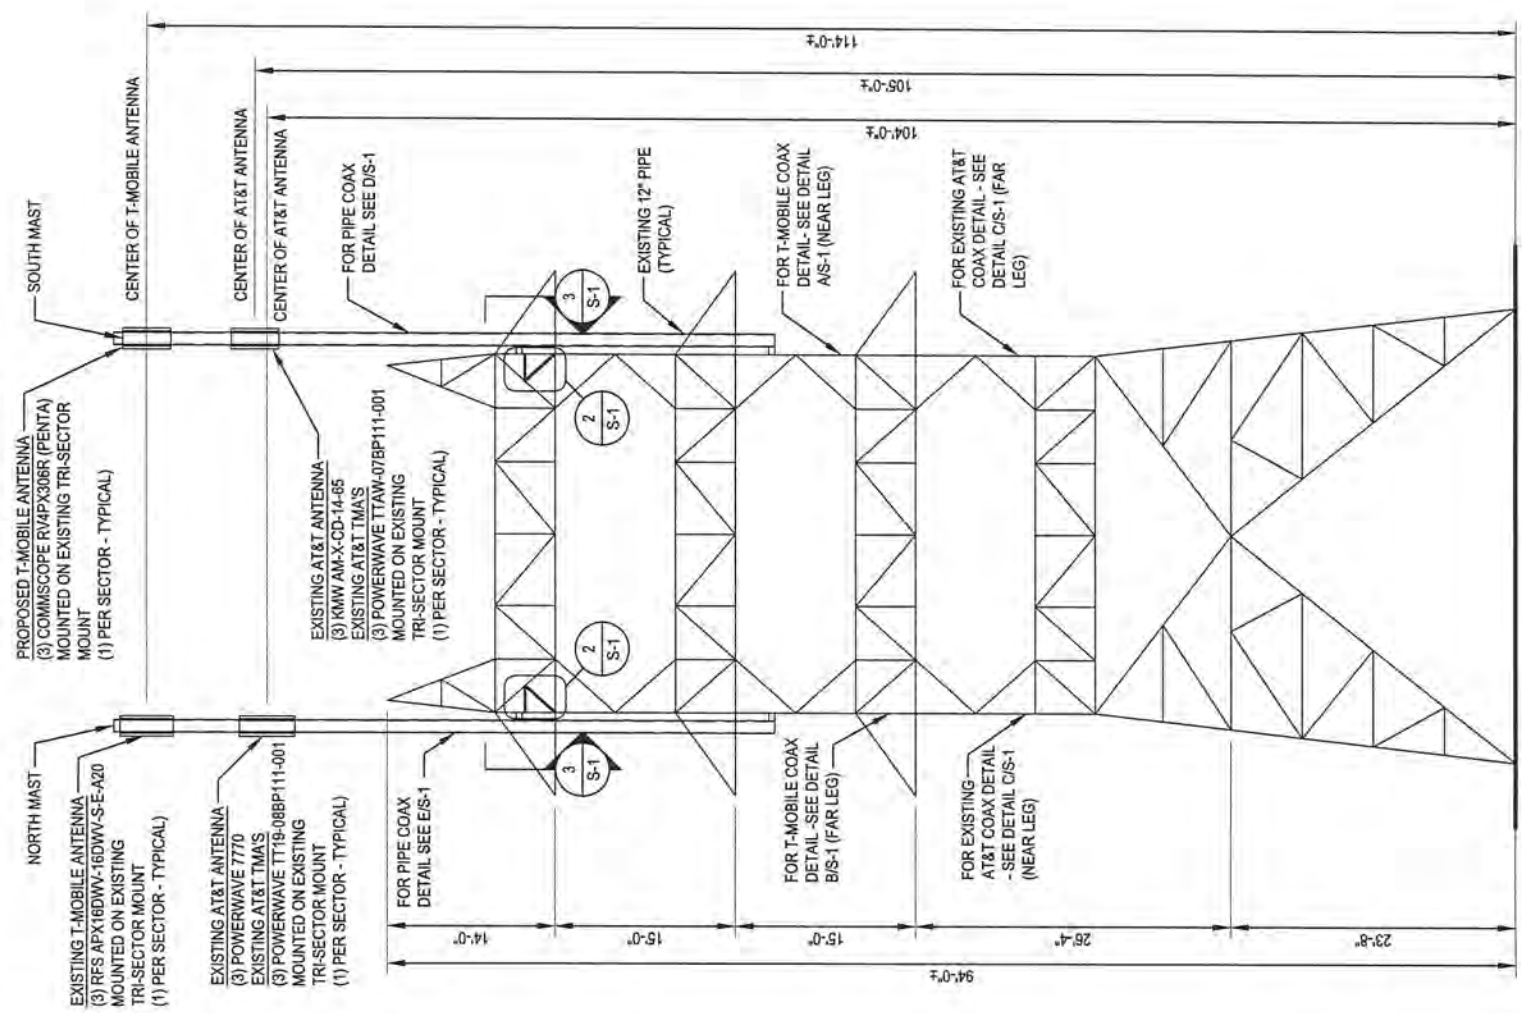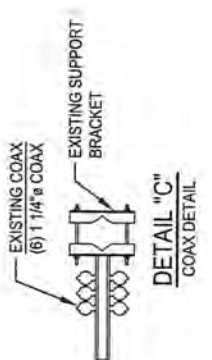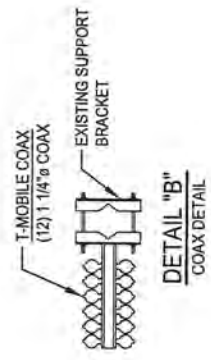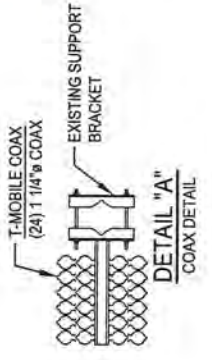

TOWER ELEVATION 1
 S-1

APPENDIX B

LOAD CALCULATIONS

APPENDIX B

LOAD CALCULATIONS



Job : AT&T Norwalk, CT-5046
Description:

Spec. Number
Computed by
Checked by

Page of
Sheet of
Date 7/21/08
Date

INPUT DATA

TOWER ID: 1102

Structure Height (ft) : 94

Wind Zone : Central CT (green)

Wind Speed : 110 mph

Tower Type : Suspension
 Strain

Extreme Wind Model : PCS Addition

Shield Wire Properties:

| | BACK | AHEAD |
|---------------|----------------|----------------|
| NAME = | 0.438 COMP | 0.438 COMP |
| DESCRIPTION = | 0.438 | 0.438 |
| STRANDING = | 9/3 Cu/Cal Brz | 9/3 Cu/Cal Brz |
| DIAMETER = | 0.438 in | 0.438 in |
| WEIGHT = | 0.408 lb/ft | 0.408 lb/ft |

Conductor Properties:

| | | BACK | AHEAD | | |
|--------------------------------|---|-------------|-------------|---|--------------------------------|
| Number of Conductors per phase | 1 | TERN | TERN | 1 | Number of Conductors per phase |
| | | 795.000 | 795.000 | | |
| | | 45/7 ACSR | 45/7 ACSR | | |
| DIAMETER = | | 1.063 in | 1.063 in | | |
| WEIGHT = | | 0.895 lb/ft | 0.895 lb/ft | | |

Insulator Weight = 200 lbs

Broken Wire Side = AHEAD SPAN

Horizontal Line Tensions:

| | BACK | | AHEAD | |
|--------------------|--------|-----------|--------|-----------|
| | Shield | Conductor | Shield | Conductor |
| NESC HEAVY = | 3,800 | 7,000 | 3,800 | 7,000 |
| EXTREME WIND = | 3,140 | 7,568 | 3,140 | 7,568 |
| LONG. WIND = | na | na | na | na |
| 250D COMBINED = | na | na | na | na |
| NESC W/O OLF = | na | na | na | na |
| 60 DEG F NO WIND = | 1,412 | 2,734 | 1,412 | 2,734 |

Line Geometry:

| | | | | | SUM |
|--------------------|-------|-----|--------|-----|-----|
| LINE ANGLE (deg) = | BACK: | 13 | AHEAD: | 13 | 26 |
| WIND SPAN (ft) = | BACK: | 409 | AHEAD: | 409 | 818 |
| WEIGHT SPAN (ft) = | BACK: | 415 | AHEAD: | 415 | 830 |



Job : AT&T Norwalk, CT-5046
Description:

Spec. Number
Computed by
Checked by

Page of
Sheet of
Date 7/21/08
Date

WIRE LOADING AT ATTACHMENTS

TOWER ID:

Wind Span =
Weight Span =
Total Angle =

Broken Wire Span =
Type of Insulator Attachment =

1. NESC RULE 250B Heavy Loading:

| | INTACT CONDITION | | | BROKEN WIRE CONDITION | | |
|---------------|------------------|--------------|----------|-----------------------|--------------|----------|
| | Horizontal | Longitudinal | Vertical | Horizontal | Longitudinal | Vertical |
| Shield Wire = | 3,810 lb | 0 lb | 1,234 lb | 1,905 lb | 6,108 lb | 617 lb |
| Conductor = | 6,618 lb | 0 lb | 2,924 lb | 3,309 lb | 11,252 lb | 1,462 lb |

2. NESC RULE 250C Transverse Extreme Wind Loading:

| | Horizontal | Longitudinal | Vertical |
|---------------|------------|--------------|----------|
| Shield Wire = | 2,270 lb | 0 lb | 339 lb |
| Conductor = | 5,486 lb | 0 lb | 1,143 lb |

3. NESC RULE 250C Longitudinal Extreme Wind Loading:

| | Horizontal | Longitudinal | Vertical |
|---------------|------------|--------------|----------|
| Shield Wire = | #VALUE! | #VALUE! | 339 lb |
| Conductor = | #VALUE! | #VALUE! | 1,143 lb |

4. NESC RULE 250D Extreme Ice & Wind Loading:

| | Horizontal | Longitudinal | Vertical |
|---------------|------------|--------------|----------|
| Shield Wire = | #VALUE! | #VALUE! | 1,823 lb |
| Conductor = | #VALUE! | #VALUE! | 3,272 lb |

5. NESC RULE 250B w/o OLF's

| | Horizontal | Longitudinal | Vertical |
|---------------|------------|--------------|----------|
| Shield Wire = | #VALUE! | #VALUE! | 823 lb |
| Conductor = | #VALUE! | #VALUE! | 1,949 lb |

6. 60 Deg. F. No Wind

| | Horizontal | Longitudinal | Vertical |
|---------------|------------|--------------|----------|
| Shield Wire = | 637 lb | 0 lb | 339 lb |
| Conductor = | 1,234 lb | 0 lb | 1,143 lb |

7. Construction

| | Horizontal | Longitudinal | Vertical |
|---------------|------------|--------------|----------|
| Shield Wire = | 956 lb | 0 lb | 508 lb |
| Conductor = | 1,851 lb | 0 lb | 1,714 lb |

NOTE: All loads include required overload factors (OLF's).



Job : AT&T Norwalk, CT-5046
Description:

Spec. Number
Computed by
Checked by

Page of
Sheet of
Date 7/21/08
Date

INPUT DATA

TOWER ID: 1102

Structure Height (ft) : 94

Wind Zone : Central CT (green)

Wind Speed : 110 mph

Tower Type : Suspension
 Strain

Extreme Wind Model : PCS Addition

Shield Wire Properties:

| | BACK | AHEAD |
|---------------|-------------|-------------|
| NAME = | OPGW-120 ✓ | OPGW-120 ✓ |
| DESCRIPTION = | 6-Groove | 6-Groove |
| STRANDING = | 10/9 FOCAS | 10/9 FOCAS |
| DIAMETER = | 0.738 in | 0.738 in |
| WEIGHT = | 0.518 lb/ft | 0.518 lb/ft |

Conductor Properties:

| | | BACK | AHEAD | | |
|--------------------------------|---|-------------|-------------|---|--------------------------------|
| Number of Conductors per phase | 1 | NONE | NONE | 1 | Number of Conductors per phase |
| | | - | - | | |
| | | -- | -- | | |
| DIAMETER = | | 0.000 in | 0.000 in | | |
| WEIGHT = | | 0.000 lb/ft | 0.000 lb/ft | | |

Insulator Weight = 200 lbs

Broken Wire Side = AHEAD SPAN

Horizontal Line Tensions:

| | BACK | | AHEAD | |
|--------------------|---------|-----------|---------|-----------|
| | Shield | Conductor | Shield | Conductor |
| NESC HEAVY = | 6,000 ✓ | na | 6,000 ✓ | na |
| EXTREME WIND = | 7,760 ✓ | na | 7,760 ✓ | na |
| LONG. WIND = | na | na | na | na |
| 250D COMBINED = | na | na | na | na |
| NESC W/O OLF = | na | na | na | na |
| 60 DEG F NO WIND = | 2,076 ✓ | na | 2,076 ✓ | na |

Line Geometry:

| | | | | | SUM |
|--------------------|-------|-----|--------|-----|-----|
| LINE ANGLE (deg) = | BACK: | 13 | AHEAD: | 13 | 26 |
| WIND SPAN (ft) = | BACK: | 409 | AHEAD: | 409 | 818 |
| WEIGHT SPAN (ft) = | BACK: | 415 | AHEAD: | 415 | 830 |



Job : AT&T Norwalk, CT-5046
Description:

Spec. Number
Computed by
Checked by

Page of
Sheet of
Date 7/21/08
Date

WIRE LOADING AT ATTACHMENTS

TOWER ID: 1102

Wind Span = 818 ft
Weight Span = 830 ft
Total Angle = 26 degrees

Broken Wire Span = AHEAD SPAN
Type of Insulator Attachment = STRAIN

1. NESC RULE 250B Heavy Loading:

| | INTACT CONDITION | | | BROKEN WIRE CONDITION | | |
|---------------|------------------|--------------|----------|-----------------------|--------------|----------|
| | Horizontal | Longitudinal | Vertical | Horizontal | Longitudinal | Vertical |
| Shield Wire = | 5,652 lb | 0 lb | 1,603 lb | 2,826 lb | 9,645 lb | 802 lb |
| Conductor = | #VALUE! | #VALUE! | 987 lb | #VALUE! | #VALUE! | 494 lb |

2. NESC RULE 250C Transverse Extreme Wind Loading:

| | Horizontal | Longitudinal | Vertical |
|---------------|------------|--------------|----------|
| Shield Wire = | 4,939 lb | 0 lb | 430 lb |
| Conductor = | #VALUE! | #VALUE! | 400 lb |

3. NESC RULE 250C Longitudinal Extreme Wind Loading:

| | Horizontal | Longitudinal | Vertical |
|---------------|------------|--------------|----------|
| Shield Wire = | #VALUE! | #VALUE! | 430 lb |
| Conductor = | #VALUE! | #VALUE! | 400 lb |

4. NESC RULE 250D Extreme Ice & Wind Loading:

| | Horizontal | Longitudinal | Vertical |
|---------------|------------|--------------|----------|
| Shield Wire = | #VALUE! | #VALUE! | 2,224 lb |
| Conductor = | #VALUE! | #VALUE! | 1,432 lb |

5. NESC RULE 250B w/o OLF's

| | Horizontal | Longitudinal | Vertical |
|---------------|------------|--------------|----------|
| Shield Wire = | #VALUE! | #VALUE! | 1,069 lb |
| Conductor = | #VALUE! | #VALUE! | 658 lb |

6. 60 Deg. F, No Wind

| | Horizontal | Longitudinal | Vertical |
|---------------|------------|--------------|----------|
| Shield Wire = | 937 lb | 0 lb | 430 lb |
| Conductor = | #VALUE! | #VALUE! | 400 lb |

7. Construction

| | Horizontal | Longitudinal | Vertical |
|---------------|------------|--------------|----------|
| Shield Wire = | 1,405 lb | 0 lb | 645 lb |
| Conductor = | #VALUE! | #VALUE! | 600 lb |

NOTE: All loads include required overload factors (OLF's).

Equipment Loads (Tubular Pole on Lattice Structure) - South Mast - T-Mobile

Constants

| | |
|------------------------------|--|
| $h_{lattice} := 94 \cdot ft$ | height of lattice structure |
| $h_{mast} := 117 \cdot ft$ | Top of Mast AGL |
| $b_{mast} := 62 \cdot ft$ | Bot. of Mast AGL |
| $b_{coax} := 85 \cdot ft$ | Bot. of Coax AGL (on mast) |
| $z_{equip} := 114 \cdot ft$ | elevation of equip. |
| $z_{coax} := 90.5 \cdot ft$ | elevation to CL of coax section for TIA wind (linear appurtance) |
| $z_{pipe} := 90.5 \cdot ft$ | elevation to CL of pipe section for TIA wind |
| $r_{ice} := 0.5 \cdot in$ | Radial Ice, Tia & NESc |

TIA/EIA Wind

| | |
|-------------------|-------------------------------|
| $V_{tia} := 85$ | TIA Basic Wind Speed |
| $V_{i.tia} := 74$ | TIA Basic Wind Speed with Ice |

$$G_H := \begin{cases} \text{if } 0.65 + \left(\frac{0.60}{\left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}}} \right) \leq 1 \\ \quad \left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}} \\ \quad \parallel 1 \\ \text{also if } 0.65 + \left(\frac{0.60}{\left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}}} \right) \geq 1.25 \\ \quad \left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}} \\ \quad \parallel 1.25 \\ \text{else} \\ \quad \left(0.65 + \left(\frac{0.60}{\left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}}} \right) \right) \end{cases}$$

$G_H = 1.167$ Calculated GRF, Sec. 2.3.4.1

$m_{grf.pole} := 1.25$ GRF Multiplier, Sec. 2.3.4.4

$G'_H := G_H \cdot m_{grf.pole} = 1.458$ Final GRF of pole on lattice, Sec. 2.3.4.4

NESC Shape Factors:

$Cd_R := 1.3$ $Cd_F := 1.6$ $Cd_{coax} := 1.45$

NESC Overload Factors:

| | |
|-----------------------|--------------------------|
| $OLF_{250B_V} := 1.5$ | 250B Vertical OLF |
| $OLF_{250B_T} := 2.5$ | 250B Transverse Wind OLF |
| $OLF_{250C_V} := 1.0$ | 250C Vertical OLF |
| $OLF_{250C_T} := 1.0$ | 250C Transverse Wind OLF |

$I_d := 57 \cdot pcf$ Ice Density

NESC Wind

$V_{nesc} := 110$ NESC 250C 3 sec Gust Speed per OTRM 060

$V_{i.nesc} := 39.5$ NESC 250B 3 sec Gust Speed with Ice

$I := 1.0$ NESC Importance Factor

$E_s := 0.346 \cdot \left(\frac{33}{\left(0.67 \cdot \frac{h_{mast}}{ft} \right)} \right)^{\frac{1}{7}} = 0.306$ NESC Factors, Table 250-3

$B_s := \frac{1}{\left(1 + \frac{0.56 \cdot \left(0.67 \cdot \frac{h_{mast}}{ft} \right)}{220} \right)} = 0.834$ NESC Factors, Table 250-3

$k_v := 1.43$ NESC Constant, Table 250-3

$G_{RF} := \frac{\left(1 + \left(2.7 \cdot E_s \cdot B_s^{0.5} \right) \right)}{k_v^2} = 0.858$ Calculated GRF, Table 250-3

$m_{grf} := 1.25$ NEU specified multiplier for 250C (OTRM 059.1, Attachment A)

$G'_{RF} := G_{RF} \cdot m_{grf} = 1.072$ Calculated GRF for 250C

TIA/EIA Exposure Coefficients:

$$Kz_{equip} := \left(\frac{z_{equip}}{33 \cdot ft} \right)^{\frac{2}{7}} = 1.425$$

$$Kz_{coax} := \left(\frac{z_{coax}}{33 \cdot ft} \right)^{\frac{2}{7}} = 1.334$$

Section Average Height Above Ground for Wind Load

$$Kz_{pipe} := \left(\frac{z_{pipe}}{33 \cdot ft} \right)^{\frac{2}{7}} = 1.334$$

Section Average Height Above Ground for Wind Load

NESC Exposure Coefficient:

$$k_z := 2.01 \cdot \left(\frac{h_{mast}}{900 \cdot ft} \right)^{\frac{2}{9.5}} = 1.308$$

Calculated k_z per Table 250-2

TIA/EIA Wind Pressure:

$$qz_{ice_{equip}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{equip} = 20 \text{ psf}$$

$$qz_{equip} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{equip} = 26.4 \text{ psf}$$

$$qz_{ice_{coax}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{coax} = 18.7 \text{ psf}$$

$$qz_{coax} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{coax} = 24.7 \text{ psf}$$

$$qz_{ice_{pipe}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{pipe} = 18.7 \text{ psf}$$

$$qz_{pipe} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{pipe} = 24.7 \text{ psf}$$

$$qz_{ice_{comp}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{pipe} = 18.7 \text{ psf}$$

$$qz_{comp} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{pipe} = 24.7 \text{ psf}$$

NESC Wind Pressure:

$$qz_{250B} := 0.00256 \cdot V_{i.nesc}^2 \cdot I \cdot psf = 4.0 \text{ psf}$$

$$qz_{250C} := 0.00256 \cdot k_z \cdot V_{nesc}^2 \cdot I \cdot psf = 40.5 \text{ psf}$$

Pipe Extension Loads

Constants

$OD := 12.75 \cdot \text{in}$ outer diameter of pipe riser

$L_{\text{pipe}} := 55 \text{ ft}$ Length of pipe riser

$MemberLabel_{\text{pipe}} := \text{"M2"}$ Member Label in Risa

$$Weight_{ice_{\text{pipe}}} := I_d \cdot \frac{\pi}{4} \cdot ((OD + 2 \cdot r_{ice})^2 - OD^2) = 8.2 \text{ plf}$$

$SA_{\text{pipe}} := OD = 1.063 \text{ ft}$ Projected Surface Area of Pipe

$SA_{ice_{\text{pipe}}} := OD + (2 \cdot r_{ice}) = 1.146 \text{ ft}$ Projected Surface Area of Pipe with Ice

TIA/EIA Wind:

$$Ar_{\text{pipe}} := \frac{L_{\text{pipe}}}{OD} = 51.765$$

$$Ca_{\text{pipe}} := \begin{cases} \text{if } Ar_{\text{pipe}} \leq 7 & 0.8 \\ \text{if } 7 < Ar_{\text{pipe}} < 25 & 0.8 + \frac{(Ar_{\text{pipe}} - 7) \cdot (1.2 - 0.8)}{(25 - 7)} \\ \text{if } Ar_{\text{pipe}} \geq 25 & 1.2 \end{cases} = 1.2 \quad \text{Table 1}$$

$$Wind.TIA_{\text{pipe}} := qz_{\text{pipe}} \cdot G'_H \cdot Ca_{\text{pipe}} \cdot SA_{\text{pipe}} = 45.9 \text{ plf}$$

$$IceWind.TIA_{\text{pipe}} := qz_{ice_{\text{pipe}}} \cdot G'_H \cdot Ca_{\text{pipe}} \cdot SA_{ice_{\text{pipe}}} = 37.5 \text{ plf}$$

NESC Wind:

$$Wind.250B_{\text{pipe}} := qz_{250B} \cdot Cd_R \cdot SA_{ice_{\text{pipe}}} = 5.9 \text{ plf}$$

Wind Pressure Above Top of Tower:

$$Wind.250C_{\text{pipe.Above}} := qz_{250C} \cdot G'_{RF} \cdot Cd_R \cdot SA_{\text{pipe}} = 60.0 \text{ plf}$$

Wind Pressure Below Top of Tower:

$$Wind.250C_{\text{pipe.Below}} := qz_{250C} \cdot G'_{RF} \cdot Cd_R \cdot SA_{\text{pipe}} = 48.0 \text{ plf}$$

Mast Component Loads

Component Description

$a := 1 \dots 4$ <----- input number of component slots used

| | | | | | |
|---------------------|-----------------------|----------------------------|----------------------------|---------------------------------|-------------------------------------|
| 1. 6x6x1/4 Hor Tube | $Cd_{comp_1} := Cd_F$ | $W_{comp_1} := 6 \cdot in$ | $H_{comp_1} := 6 \cdot in$ | $L_{comp_1} := 7 \text{ ft}$ | $MemLabel_{comp_1} := \text{"M4"}$ |
| 2. 6x6x1/4 Hor Tube | $Cd_{comp_2} := Cd_F$ | $W_{comp_2} := 6 \cdot in$ | $H_{comp_2} := 6 \cdot in$ | $L_{comp_2} := 7 \text{ ft}$ | $MemLabel_{comp_2} := \text{"M7"}$ |
| 3. 6x6x1/4 Hor Tube | $Cd_{comp_3} := Cd_F$ | $W_{comp_3} := 6 \cdot in$ | $H_{comp_3} := 6 \cdot in$ | $L_{comp_3} := 1.08 \text{ ft}$ | $MemLabel_{comp_3} := \text{"M9"}$ |
| 4. 6x6x1/4 Hor Tube | $Cd_{comp_4} := Cd_F$ | $W_{comp_4} := 6 \cdot in$ | $H_{comp_4} := 6 \cdot in$ | $L_{comp_4} := 1.08 \text{ ft}$ | $MemLabel_{comp_4} := \text{"M10"}$ |
| 5. Not Used | $Cd_{comp_5} := Cd_F$ | $W_{comp_5} := 0 \cdot in$ | $H_{comp_5} := 0 \cdot in$ | $L_{comp_5} := 0 \text{ ft}$ | $MemLabel_{comp_5} := \text{"M4"}$ |
| 6. Not Used | $Cd_{comp_6} := Cd_F$ | $W_{comp_6} := 0 \cdot in$ | $H_{comp_6} := 0 \cdot in$ | $L_{comp_6} := 0 \text{ ft}$ | $MemLabel_{comp_6} := \text{"M4"}$ |

$$Weight_{ice_{comp_a}} := I_d \cdot \left((W_{comp_a} + 2 \cdot r_{ice}) \cdot (H_{comp_a} + 2 \cdot r_{ice}) - W_{comp_a} \cdot H_{comp_a} \right) = \begin{bmatrix} 5.1 \\ 5.1 \\ 5.1 \\ 5.1 \end{bmatrix} \text{ plf}$$

$$SA_{comp_a} := \max(W_{comp_a}, H_{comp_a}) = \begin{bmatrix} 0.5 \\ 0.5 \\ 0.5 \\ 0.5 \end{bmatrix} \text{ ft}$$

$$SA_{ice_{comp_a}} := \max(W_{comp_a}, H_{comp_a}) + 2 \cdot r_{ice} = \begin{bmatrix} 0.6 \\ 0.6 \\ 0.6 \\ 0.6 \end{bmatrix} \text{ ft}$$

$$Ar_{comp_a} := \frac{L_{comp_a}}{\max(W_{comp_a}, H_{comp_a})} = \begin{bmatrix} 14 \\ 14 \\ 2.2 \\ 2.2 \end{bmatrix}$$

$$Ca_{comp_a} := \begin{cases} \text{if } Ar_{comp_a} \leq 7 \\ \quad \parallel 1.4 \\ \text{if } 7 < Ar_{comp_a} < 25 \\ \quad \parallel 1.4 + \frac{(Ar_{comp_a} - 7) \cdot (2.0 - 1.4)}{(25 - 7)} \\ \text{if } Ar_{comp_a} \geq 25 \\ \quad \parallel 2.0 \end{cases} = \begin{bmatrix} 1.6 \\ 1.6 \\ 1.4 \\ 1.4 \end{bmatrix}$$

TIA/EIA-222-F,
Table 3

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

www.PaulJFord.com

Orlando

1801 Lee Rd, Suite 230

Winter Park, FL 32789

Phone 407.898.9039

100% Employee Owned

TIA/EIA Wind:

$$IceWind.TIA_{comp_a} := qz_{ice_{comp}} \cdot G'_H \cdot Ca_{comp_a} \cdot SA_{ice_{comp_a}} = \begin{bmatrix} 26.0 \\ 26.0 \\ 22.3 \\ 22.3 \end{bmatrix} plf$$

$$Wind.TIA_{comp_a} := qz_{comp} \cdot G'_H \cdot Ca_{comp_a} \cdot SA_{comp_a} = \begin{bmatrix} 29.4 \\ 29.4 \\ 25.2 \\ 25.2 \end{bmatrix} plf$$

NESC Wind:

$$Wind.250B_{comp_a} := qz_{250B} \cdot Cd_{comp_a} \cdot \max(W_{comp_a}, H_{comp_a}) = \begin{bmatrix} 3.2 \\ 3.2 \\ 3.2 \\ 3.2 \end{bmatrix} plf$$

$$Wind.250C_{comp_a} := qz_{250C} \cdot G_{RF} \cdot Cd_{comp_a} \cdot \max(W_{comp_a}, H_{comp_a}) = \begin{bmatrix} 27.8 \\ 27.8 \\ 27.8 \\ 27.8 \end{bmatrix} plf$$

Mount Load

$b := 1..2$ <----- input number of mount slots used

1. Microflect Tri-Sector Mount

TIA/EIA-222-F
Table 3

NESC Shape
Factor

$$A_{mount_1} := 3.0 \cdot ft^2$$

$$A_{ice_{mount_1}} := 4.22 \cdot ft^2$$

$$WT_{mount_1} := 101 \cdot lb$$

$$WT_{ice_{mount_1}} := 150 \cdot lb$$

$$C_{a_{mount_1}} := 1.2$$

$$C_{d_{mount_1}} := C_{d_F}$$

2. (3) 2.375" OD Pipe Mounts

$$A_{mount_2} := 0 \cdot ft^2$$

$$A_{ice_{mount_2}} := 0 \cdot ft^2$$

$$WT_{mount_2} := 66 \cdot lb$$

$$WT_{ice_{mount_2}} := 97 \cdot lb$$

$$C_{a_{mount_2}} := 1.2$$

$$C_{d_{mount_2}} := C_{d_F}$$

3. Not Used

$$A_{mount_3} := 0 \cdot ft^2$$

$$A_{ice_{mount_3}} := 0 \cdot ft^2$$

$$WT_{mount_3} := 0 \cdot lb$$

$$WT_{ice_{mount_3}} := 0 \cdot lb$$

$$C_{a_{mount_3}} := 1.2$$

$$C_{d_{mount_3}} := C_{d_F}$$

4. Not Used

$$A_{mount_4} := 0 \cdot ft^2$$

$$A_{ice_{mount_4}} := 0 \cdot ft^2$$

$$WT_{mount_4} := 0 \cdot lb$$

$$WT_{ice_{mount_4}} := 0 \cdot lb$$

$$C_{a_{mount_4}} := 1.2$$

$$C_{d_{mount_4}} := C_{d_F}$$

TIA/EIA Wind:

$$IceWind.TIA_{mount_b} := qz_{ice_{equip}} \cdot G'_H \cdot C_{a_{mount_b}} \cdot A_{ice_{mount_b}} = \begin{bmatrix} 147.5 \\ 0.0 \end{bmatrix} lbf$$

$$Wind.TIA_{mount_b} := qz_{equip} \cdot G'_H \cdot C_{a_{mount_b}} \cdot A_{mount_b} = \begin{bmatrix} 138.4 \\ 0.0 \end{bmatrix} lbf$$

NESC Wind:

$$Wind.250B_{mount_b} := qz_{250B} \cdot C_{d_{mount_b}} \cdot A_{ice_{mount_b}} = \begin{bmatrix} 27.0 \\ 0.0 \end{bmatrix} lbf$$

$$Wind.250C_{mount_b} := qz_{250C} \cdot G'_{RF} \cdot C_{d_{mount_b}} \cdot A_{mount_b} = \begin{bmatrix} 208.5 \\ 0.0 \end{bmatrix} lbf$$

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

Equipment Loads

Equipment Description

$i := 1 .. 1$ <----- input number of equip slots used

| | | | | | |
|----------------------|-------------------|-----------------------------|-----------------------------|----------------------------|-------------------------------|
| 1. RV4PX306R (Penta) | $QTY_{eq_1} := 3$ | $L_{eq_1} := 63.0 \cdot in$ | $W_{eq_1} := 13.9 \cdot in$ | $t_{eq_1} := 8.2 \cdot in$ | $WT_{eq_1} := 52.9 \cdot lbf$ |
| 2. Not Used | $QTY_{eq_2} := 0$ | $L_{eq_2} := 0 \cdot in$ | $W_{eq_2} := 0 \cdot in$ | $t_{eq_2} := 0 \cdot in$ | $WT_{eq_2} := 0 \cdot lbf$ |
| 3. Not Used | $QTY_{eq_3} := 0$ | $L_{eq_3} := 0 \cdot in$ | $W_{eq_3} := 0 \cdot in$ | $t_{eq_3} := 0 \cdot in$ | $WT_{eq_3} := 0 \cdot lbf$ |
| 4. Not Used | $QTY_{eq_4} := 0$ | $L_{eq_4} := 0 \cdot in$ | $W_{eq_4} := 0 \cdot in$ | $t_{eq_4} := 0 \cdot in$ | $WT_{eq_4} := 0 \cdot lbf$ |
| 5. Not Used | $QTY_{eq_5} := 0$ | $L_{eq_5} := 0 \cdot in$ | $W_{eq_5} := 0 \cdot in$ | $t_{eq_5} := 0 \cdot in$ | $WT_{eq_5} := 0 \cdot lbf$ |
| 6. Not Used | $QTY_{eq_6} := 0$ | $L_{eq_6} := 0 \cdot in$ | $W_{eq_6} := 0 \cdot in$ | $t_{eq_6} := 0 \cdot in$ | $WT_{eq_6} := 0 \cdot lbf$ |

$$Weight_{equip_i} := WT_{eq_i} \cdot QTY_{eq_i} = [158.7] \text{ lbf}$$

$$Weight.Ice_{equip_i} := I_d \cdot QTY_{eq_i} \cdot \left((L_{eq_i} + 2 \cdot r_{ice}) \cdot (W_{eq_i} + 2 \cdot r_{ice}) \cdot (t_{eq_i} + 2 \cdot r_{ice}) - L_{eq_i} \cdot W_{eq_i} \cdot t_{eq_i} \right) = [157.6] \text{ lbf}$$

$$SA_{eq_i} := L_{eq_i} \cdot W_{eq_i} = [6.1] \text{ ft}^2$$

$$A_{eq_i} := SA_{eq_i} \cdot QTY_{eq_i} = [18.2] \text{ ft}^2$$

$$SAice_{eq_i} := (L_{eq_i} + 2 \cdot r_{ice}) \cdot (W_{eq_i} + 2 \cdot r_{ice}) = [6.6] \text{ ft}^2$$

$$Aice_{eq_i} := SAice_{eq_i} \cdot QTY_{eq_i} = [19.9] \text{ ft}^2$$

$$Ar_{eq_i} := \frac{L_{eq_i}}{W_{eq_i}} = [4.5]$$

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

$$Ca_{eq_i} := \begin{cases} \text{if } Ar_{eq_i} \leq 7 \\ \quad \parallel 1.4 \\ \text{if } 7 < Ar_{eq_i} < 25 \\ \quad \parallel 1.4 + \frac{(Ar_{eq_i} - 7) \cdot (2.0 - 1.4)}{(25 - 7)} \\ \text{if } Ar_{eq_i} \geq 25 \\ \quad \parallel 2.0 \end{cases} = [1.4] \quad \text{TIA/EIA-222-F, Table 3}$$

TIA/EIA Wind:

$$IceWind.TIA_{equip_i} := qz_{ice_{equip}} \cdot G'_H \cdot Ca_{eq_i} \cdot A_{ice_{eq_i}} = [810.3] \text{ lbf}$$

$$Wind.TIA_{equip_i} := qz_{equip} \cdot G'_H \cdot Ca_{eq_i} \cdot A_{eq_i} = [981.8] \text{ lbf}$$

NESC Wind:

$$Wind.250B_{equip_i} := qz_{250B} \cdot Cd_F \cdot A_{ice_{eq_i}} = [127.0] \text{ lbf}$$

$$Wind.250C_{equip_i} := qz_{250C} \cdot G'_{RF} \cdot Cd_F \cdot A_{eq_i} = [1268.0] \text{ lbf}$$

Coax Loads - Southwest Leg

Coax Cable Description

$k := 1 .. 1$ <----- input number of coax cable slots used

| Coax Cable Description | QTY_{coax_k} | NP_{coax_k} | OD_{coax_k} | WT_{coax_k} | L_{coax_k} |
|------------------------|----------------------|--------------------|--------------------------------|---------------------------------|-----------------------------|
| 1. Heliac 1-1/4"Ø | $QTY_{coax_1} := 24$ | $NP_{coax_1} := 6$ | $OD_{coax_1} := 1.48 \cdot in$ | $WT_{coax_1} := 0.50 \cdot plf$ | $L_{coax_1} := 20 \cdot ft$ |
| 2. Heliac 1-1/4"Ø | $QTY_{coax_2} := 0$ | $NP_{coax_2} := 0$ | $OD_{coax_2} := 0 \cdot in$ | $WT_{coax_2} := 0 \cdot plf$ | $L_{coax_2} := 0 \cdot ft$ |
| 3. Not Used | $QTY_{coax_3} := 0$ | $NP_{coax_3} := 0$ | $OD_{coax_3} := 0 \cdot in$ | $WT_{coax_3} := 0 \cdot plf$ | $L_{coax_3} := 0 \cdot ft$ |
| 4. Not Used | $QTY_{coax_4} := 0$ | $NP_{coax_4} := 0$ | $OD_{coax_4} := 0 \cdot in$ | $WT_{coax_4} := 0 \cdot plf$ | $L_{coax_4} := 0 \cdot ft$ |
| 5. Not Used | $QTY_{coax_5} := 0$ | $NP_{coax_5} := 0$ | $OD_{coax_5} := 0 \cdot in$ | $WT_{coax_5} := 0 \cdot plf$ | $L_{coax_5} := 0 \cdot ft$ |
| 6. Not Used | $QTY_{coax_6} := 0$ | $NP_{coax_6} := 0$ | $OD_{coax_6} := 0 \cdot in$ | $WT_{coax_6} := 0 \cdot plf$ | $L_{coax_6} := 0 \cdot ft$ |

$$coaxspan := \begin{bmatrix} 29 \\ 13 \\ 15 \\ 15 \\ 12.5 \end{bmatrix} \cdot ft$$

Input coax vertical span between attachment joints for PLS Loads

$$SA_{coax_k} := NP_{coax_k} \cdot OD_{coax_k} = [0.7] ft$$

$$SA_{ice_{coax_k}} := \begin{cases} \text{if } NP_{coax_k} = 0 \\ \parallel \\ \parallel 0 \\ \parallel \text{else} \\ \parallel \parallel \left((NP_{coax_k} \cdot OD_{coax_k}) + (2 \cdot r_{ice}) \right) \end{cases} = [0.8] ft$$

$$Weight_{coax_k} := WT_{coax_k} \cdot QTY_{coax_k} = [12.0] plf$$

$$Weight.Ice_{coax_k} := \left(\frac{\pi}{4} \cdot \left((OD_{coax_k} + 2 \cdot r_{ice})^2 - OD_{coax_k}^2 \right) \cdot QTY_{coax_k} \cdot I_d \right) = [29.5] plf$$

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

$$Ar_{coax_k} := \frac{L_{coax_k}}{OD_{coax_k}} = [162.2] \quad \text{Aspect Ratio of Coax}$$

$$Ca_{coax_k} := \left\{ \begin{array}{l} \text{if } Ar_{coax_k} \leq 7 \\ \quad \left\{ \begin{array}{l} 0.8 \\ \text{if } 7 < Ar_{coax_k} < 25 \\ \quad \left\{ \begin{array}{l} 0.8 + \frac{(Ar_{coax_k} - 7) \cdot (2.0 - 1.4)}{(25 - 7)} \\ \text{if } Ar_{coax_k} \geq 25 \\ \quad \left\{ \begin{array}{l} 1.2 \end{array} \right. \end{array} \right. \end{array} \right. \end{array} \right. = [1.2] \quad \text{TIA/EIA-222-F, Table 3}$$

TIA/EIA Wind:

$$IceWind.TIA_{coax_k} := qz_{ice_{coax}} \cdot G'_H \cdot Ca_{coax_k} \cdot SA_{ice_{coax_k}} = [26.9] \textit{ plf}$$

$$Wind.TIA_{coax_k} := qz_{coax} \cdot G'_H \cdot Ca_{coax_k} \cdot SA_{coax_k} = [32.0] \textit{ plf}$$

NESC Wind for Coax on Pipe Mast Risa Model:

$$Wind.250B_{coax.pipe.k} := qz_{250B} \cdot Cd_{coax} \cdot SA_{ice_{coax_k}} = [4.8] \text{ plf}$$

$$Wind.250C_{coax.pipe.Above_k} := qz_{250C} \cdot G'_{RF} \cdot Cd_{coax} \cdot SA_{coax_k} = [46.6] \text{ plf}$$

$$Wind.250C_{coax.pipe.Below_k} := qz_{250C} \cdot G_{RF} \cdot Cd_{coax} \cdot SA_{coax_k} = [37.3] \text{ plf}$$

NESC Loads For PLS Model:

$$Weight.250B_{coax.twr} := \left(\sum Weight_{coax} + \sum Weight.Ice_{coax} \right) \cdot coaxspan \cdot OLF250B_V$$

$$Wind.250B_{coax.twr} := qz_{250B} \cdot Cd_{coax} \cdot \left(\sum SA_{ice_{coax}} \right) \cdot coaxspan \cdot OLF250B_T$$

$$Weight.250C_{coax.twr} := \left(\sum Weight_{coax} \right) \cdot coaxspan \cdot OLF250C_V$$

$$Wind.250C_{coax.twr} := qz_{250C} \cdot G_{RF} \cdot Cd_{coax} \cdot \left(\sum SA_{coax} \right) \cdot coaxspan \cdot OLF250C_T$$

Summary of Loads - PLS Coax Load Inputs

NESC 250B_X-dir - Wind w/ Ice

| Joint Label | Vertical Load (lbs) | Transverse Load (lbs) | Longitudinal Load (lbs) | Load Comment |
|-------------|---------------------|-----------------------|-------------------------|--------------|
| C1 | 1807 | 346 | 0 | Coax Load |
| C2 | 810 | 155 | 0 | Coax Load |
| C3 | 935 | 179 | 0 | Coax Load |
| C4 | 935 | 179 | 0 | Coax Load |
| C5 | 779 | 149 | 0 | Coax Load |

NESC 250C_X-dir - Wind w/o Ice

| Joint Label | Vertical Load (lbs) | Transverse Load (lbs) | Longitudinal Load (lbs) | Load Comment |
|-------------|---------------------|-----------------------|-------------------------|--------------|
| C1 | 348 | 1081 | 0 | Coax Load |
| C2 | 156 | 485 | 0 | Coax Load |
| C3 | 180 | 559 | 0 | Coax Load |
| C4 | 180 | 559 | 0 | Coax Load |
| C5 | 150 | 466 | 0 | Coax Load |

Summary of Loads - Risa Loads Inputs

BLC 2 Weight of Equipment

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft, %] |
|--------------|-----------|---------------------|------------------|
| M2 | Y | -101.0 | 52.0 |
| M2 | Y | -66.0 | 52.0 |
| M2 | Y | 0.0 | 52.0 |
| M2 | Y | 0.0 | 52.0 |
| M2 | Y | -158.7 | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads - Rows 1-6: Coax 1-6 Weight

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft, %] | End Location [ft, %] |
|--------------|-----------|-------------------------|-----------------------|------------------------|----------------------|
| M2 | Y | -12.0 | -12.0 | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

Orlando

1801 Lee Rd, Suite 230

Winter Park, FL 32789

Phone 407.898.9039

100% Employee Owned

BLC 3 Weight of Ice on Mast & Equipment

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | Y | -150.0 | 52.0 |
| M2 | Y | -97.0 | 52.0 |
| M2 | Y | 0.0 | 52.0 |
| M2 | Y | 0.0 | 52.0 |
| M2 | Y | -157.6 | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Weight of Ice on Mast

Rows 2-7: Coax 1-6

Rows 8-13: Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | Y | -8.2 | -8.2 | 0.0 | 0.0 |
| M2 | Y | -29.5 | -29.5 | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M4 | Y | -5.1 | -5.1 | 0.0 | 0.0 |
| M7 | Y | -5.1 | -5.1 | 0.0 | 0.0 |
| M9 | Y | -5.1 | -5.1 | 0.0 | 0.0 |
| M10 | Y | -5.1 | -5.1 | 0.0 | 0.0 |
| M4 | Y | | | 0.0 | 0.0 |
| M4 | Y | | | 0.0 | 0.0 |

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

Orlando

1801 Lee Rd, Suite 230

Winter Park, FL 32789

Phone 407.898.9039

100% Employee Owned

BLC 4 TIA_X-dir - Wind w/ Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 147.5 | 52.0 |
| M2 | X | 0.0 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | 810.3 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 37.5 | 37.5 | 0.0 | 0.0 |
| M2 | PX | 26.9 | 26.9 | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M4 | PX | 26.0 | 26.0 | 0.0 | 0.0 |
| M7 | PX | 26.0 | 26.0 | 0.0 | 0.0 |
| M9 | PX | 22.3 | 22.3 | 0.0 | 0.0 |
| M10 | PX | 22.3 | 22.3 | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |

BLC 5 TIA_X-dir - Wind w/o Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 138.4 | 52.0 |
| M2 | X | 0.0 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | 981.8 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 45.9 | 45.9 | 0.0 | 0.0 |
| M2 | PX | 32.0 | 32.0 | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M4 | PX | 29.4 | 29.4 | 0.0 | 0.0 |
| M7 | PX | 29.4 | 29.4 | 0.0 | 0.0 |
| M9 | PX | 25.2 | 25.2 | 0.0 | 0.0 |
| M10 | PX | 25.2 | 25.2 | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |

BLC 6 TIA_Z-dir - Wind w/ Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | Z | 147.5 | 52.0 |
| M2 | Z | 0.0 | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | 810.3 | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PZ | 37.5 | 37.5 | 0.0 | 0.0 |
| M2 | PZ | 26.9 | 26.9 | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M4 | PZ | 26.0 | 26.0 | 0.0 | 0.0 |
| M7 | PZ | 26.0 | 26.0 | 0.0 | 0.0 |
| M9 | PZ | 22.3 | 22.3 | 0.0 | 0.0 |
| M10 | PZ | 22.3 | 22.3 | 0.0 | 0.0 |
| M4 | PZ | | | 0.0 | 0.0 |
| M4 | PZ | | | 0.0 | 0.0 |

BLC 7 TIA_Z-dir - Wind w/o Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | Z | 138.4 | 52.0 |
| M2 | Z | 0.0 | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | 981.8 | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PZ | 45.9 | 45.9 | 0.0 | 0.0 |
| M2 | PZ | 32.0 | 32.0 | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M4 | PZ | 29.4 | 29.4 | 0.0 | 0.0 |
| M7 | PZ | 29.4 | 29.4 | 0.0 | 0.0 |
| M9 | PZ | 25.2 | 25.2 | 0.0 | 0.0 |
| M10 | PZ | 25.2 | 25.2 | 0.0 | 0.0 |
| M4 | PZ | | | 0.0 | 0.0 |
| M4 | PZ | | | 0.0 | 0.0 |

BLC 8 NESC 250B_X-dir - Wind w/ Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 27.0 | 52.0 |
| M2 | X | 0.0 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | 127.0 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 5.9 | 5.9 | 0.0 | 0.0 |
| M2 | PX | 4.8 | 4.8 | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M4 | PX | 3.2 | 3.2 | 0.0 | 0.0 |
| M7 | PX | 3.2 | 3.2 | 0.0 | 0.0 |
| M9 | PX | 3.2 | 3.2 | 0.0 | 0.0 |
| M10 | PX | 3.2 | 3.2 | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

Orlando

1801 Lee Rd, Suite 230

Winter Park, FL 32789

Phone 407.898.9039

100% Employee Owned

BLC 9 NESC 250C_X-dir - Wind w/o Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 208.5 | 52.0 |
| M2 | X | 0.0 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | 1268.0 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast Above Top of Tower

Row 2-7: Wind on Coax 1-6 Above Top of Tower

Row 8: Wind on Mast Below Top of Tower

Row 9-14: Wind on Coax 1-6 Below Top of Tower

Row 15-20: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 60.0 | 60.0 | 32.0 | 55.0 |
| M2 | PX | 46.6 | 46.6 | 32.0 | 52.0 |
| M2 | PX | | | 32.0 | 52.0 |
| M2 | PX | | | 32.0 | 52.0 |
| M2 | PX | | | 32.0 | 52.0 |
| M2 | PX | | | 32.0 | 52.0 |
| M2 | PX | | | 32.0 | 52.0 |
| M2 | PX | 48.0 | 48.0 | 0.0 | 32.0 |
| M2 | PX | 37.3 | 37.3 | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M4 | PX | 27.8 | 27.8 | 0.0 | 0.0 |
| M7 | PX | 27.8 | 27.8 | 0.0 | 0.0 |
| M9 | PX | 27.8 | 27.8 | 0.0 | 0.0 |
| M10 | PX | 27.8 | 27.8 | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

Orlando

1801 Lee Rd, Suite 230

Winter Park, FL 32789

Phone 407.898.9039

100% Employee Owned

Equipment Loads (Tubular Pole on Lattice Structure) - South Mast - AT&T

Constants

| | |
|------------------------------|--|
| $h_{lattice} := 94 \cdot ft$ | height of lattice structure |
| $h_{mast} := 117 \cdot ft$ | Top of Mast AGL |
| $b_{mast} := 62 \cdot ft$ | Bot. of Mast AGL |
| $b_{coax} := 85 \cdot ft$ | Bot. of Coax AGL (on mast) |
| $z_{equip} := 105 \cdot ft$ | elevation of equip. |
| $z_{coax} := 90.5 \cdot ft$ | elevation to CL of coax section for TIA wind (linear appurtance) |
| $z_{pipe} := 90.5 \cdot ft$ | elevation to CL of pipe section for TIA wind |
| $r_{ice} := 0.5 \cdot in$ | Radial Ice, Tia & NESc |

TIA/EIA Wind

| | |
|-------------------|-------------------------------|
| $V_{tia} := 85$ | TIA Basic Wind Speed |
| $V_{i.tia} := 74$ | TIA Basic Wind Speed with Ice |

$$G_H := \begin{cases} \text{if } 0.65 + \left(\frac{0.60}{\left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}}} \right) \leq 1 \\ \quad \left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}} \\ \quad || 1 \\ \text{also if } 0.65 + \left(\frac{0.60}{\left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}}} \right) \geq 1.25 \\ \quad \left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}} \\ \quad || 1.25 \\ \text{else} \\ \quad \left(0.65 + \left(\frac{0.60}{\left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}}} \right) \right) \end{cases}$$

| | |
|--|--|
| $G_H = 1.167$ | Calculated GRF, Sec. 2.3.4.1 |
| $m_{grf.pole} := 1.25$ | GRF Multiplier, Sec. 2.3.4.4 |
| $G'_H := G_H \cdot m_{grf.pole} = 1.458$ | Final GRF of pole on lattice, Sec. 2.3.4.4 |

NESC Shape Factors:

$Cd_R := 1.3 \quad Cd_F := 1.6 \quad Cd_{coax} := 1.45$

NESC Overload Factors:

| | |
|-----------------------|--------------------------|
| $OLF_{250B_V} := 1.5$ | 250B Vertical OLF |
| $OLF_{250B_T} := 2.5$ | 250B Transverse Wind OLF |
| $OLF_{250C_V} := 1.0$ | 250C Vertical OLF |
| $OLF_{250C_T} := 1.0$ | 250C Transverse Wind OLF |

$I_d := 57 \cdot pcf$ Ice Density

NESC Wind

| | |
|----------------------|---|
| $V_{nesc} := 110$ | NESC 250C 3 sec Gust Speed per OTRM 060 |
| $V_{i.nesc} := 39.5$ | NESC 250B 3 sec Gust Speed with Ice |

$I := 1.0$ NESC Importance Factor

$E_s := 0.346 \cdot \left(\frac{33}{\left(0.67 \cdot \frac{h_{mast}}{ft} \right)} \right)^{\frac{1}{7}} = 0.306$ NESC Factors, Table 250-3

$B_s := \frac{1}{\left(1 + \frac{0.56 \cdot \left(0.67 \cdot \frac{h_{mast}}{ft} \right)}{220} \right)} = 0.834$ NESC Factors, Table 250-3

$k_v := 1.43$ NESC Constant, Table 250-3

$G_{RF} := \frac{\left(1 + \left(2.7 \cdot E_s \cdot B_s^{0.5} \right) \right)}{k_v^2} = 0.858$ Calculated GRF, Table 250-3

$m_{grf} := 1.25$ NEU specified multiplier for 250C (OTRM 059.1, Attachment A)

$G'_{RF} := G_{RF} \cdot m_{grf} = 1.072$ Calculated GRF for 250C

TIA/EIA Exposure Coefficients:

$$Kz_{equip} := \left(\frac{z_{equip}}{33 \cdot ft} \right)^{\frac{2}{7}} = 1.392$$

$$Kz_{coax} := \left(\frac{z_{coax}}{33 \cdot ft} \right)^{\frac{2}{7}} = 1.334$$

Section Average Height Above Ground for Wind Load

$$Kz_{pipe} := \left(\frac{z_{pipe}}{33 \cdot ft} \right)^{\frac{2}{7}} = 1.334$$

Section Average Height Above Ground for Wind Load

NESC Exposure Coefficient:

$$k_z := 2.01 \cdot \left(\frac{h_{mast}}{900 \cdot ft} \right)^{\frac{2}{9.5}} = 1.308$$

Calculated k_z per Table 250-2

TIA/EIA Wind Pressure:

$$qz_{ice_{equip}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{equip} = 19.5 \text{ psf}$$

$$qz_{equip} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{equip} = 25.7 \text{ psf}$$

$$qz_{ice_{coax}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{coax} = 18.7 \text{ psf}$$

$$qz_{coax} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{coax} = 24.7 \text{ psf}$$

$$qz_{ice_{pipe}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{pipe} = 18.7 \text{ psf}$$

$$qz_{pipe} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{pipe} = 24.7 \text{ psf}$$

$$qz_{ice_{comp}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{pipe} = 18.7 \text{ psf}$$

$$qz_{comp} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{pipe} = 24.7 \text{ psf}$$

NESC Wind Pressure:

$$qz_{250B} := 0.00256 \cdot V_{i.nesc}^2 \cdot I \cdot psf = 4.0 \text{ psf}$$

$$qz_{250C} := 0.00256 \cdot k_z \cdot V_{nesc}^2 \cdot I \cdot psf = 40.5 \text{ psf}$$

Pipe Extension Loads

Constants

$OD := 12.75 \cdot \text{in}$ outer diameter of pipe riser

$L_{\text{pipe}} := 55 \text{ ft}$ Length of pipe riser

$MemberLabel_{\text{pipe}} := \text{"M2"}$ Member Label in Risa

$$Weight_{ice_{\text{pipe}}} := I_d \cdot \frac{\pi}{4} \cdot ((OD + 2 \cdot r_{ice})^2 - OD^2) \cdot 0 = 0 \text{ plf}$$

$SA_{\text{pipe}} := OD = 1.063 \text{ ft}$ Projected Surface Area of Pipe

$SA_{ice_{\text{pipe}}} := OD + (2 \cdot r_{ice}) = 1.146 \text{ ft}$ Projected Surface Area of Pipe with Ice

TIA/EIA Wind:

$$Ar_{\text{pipe}} := \frac{L_{\text{pipe}}}{OD} = 51.765$$

$$Ca_{\text{pipe}} := \begin{cases} 0.8 & \text{if } Ar_{\text{pipe}} \leq 7 \\ 0.8 + \frac{(Ar_{\text{pipe}} - 7) \cdot (1.2 - 0.8)}{(25 - 7)} & \text{if } 7 < Ar_{\text{pipe}} < 25 \\ 1.2 & \text{if } Ar_{\text{pipe}} \geq 25 \end{cases} = 1.2 \text{ Table 1}$$

$$Wind.TIA_{\text{pipe}} := qz_{\text{pipe}} \cdot G'_H \cdot Ca_{\text{pipe}} \cdot SA_{\text{pipe}} \cdot 0 = 0 \text{ plf}$$

$$IceWind.TIA_{\text{pipe}} := qz_{ice_{\text{pipe}}} \cdot G'_H \cdot Ca_{\text{pipe}} \cdot SA_{ice_{\text{pipe}}} \cdot 0 = 0 \text{ plf}$$

NESC Wind:

$$Wind.250B_{\text{pipe}} := qz_{250B} \cdot Cd_R \cdot SA_{ice_{\text{pipe}}} \cdot 0 = 0.0 \text{ plf}$$

Wind Pressure Above Top of Tower:

$$Wind.250C_{\text{pipe.Above}} := qz_{250C} \cdot G'_{RF} \cdot Cd_R \cdot SA_{\text{pipe}} \cdot 0 = 0.0 \text{ plf}$$

Wind Pressure Below Top of Tower:

$$Wind.250C_{\text{pipe.Below}} := qz_{250C} \cdot G'_{RF} \cdot Cd_R \cdot SA_{\text{pipe}} \cdot 0 = 0.0 \text{ plf}$$

Mast Component Loads - NOT USED

Component Description

$a := 1 \dots 1$ <----- input number of component slots used

| | | | | | |
|-------------|-----------------------|----------------------------|----------------------------|------------------------|-----------------------------|
| 1. Not Used | $Cd_{comp_1} := Cd_F$ | $W_{comp_1} := 0 \cdot in$ | $H_{comp_1} := 0 \cdot in$ | $L_{comp_1} := 0 \ ft$ | $MemLabel_{comp_1} := "NA"$ |
| 2. Not Used | $Cd_{comp_2} := Cd_F$ | $W_{comp_2} := 0 \cdot in$ | $H_{comp_2} := 0 \cdot in$ | $L_{comp_2} := 0 \ ft$ | $MemLabel_{comp_2} := "NA"$ |
| 3. Not Used | $Cd_{comp_3} := Cd_F$ | $W_{comp_3} := 0 \cdot in$ | $H_{comp_3} := 0 \cdot in$ | $L_{comp_3} := 0 \ ft$ | $MemLabel_{comp_3} := "NA"$ |
| 4. Not Used | $Cd_{comp_4} := Cd_F$ | $W_{comp_4} := 0 \cdot in$ | $H_{comp_4} := 0 \cdot in$ | $L_{comp_4} := 0 \ ft$ | $MemLabel_{comp_4} := "NA"$ |
| 5. Not Used | $Cd_{comp_5} := Cd_F$ | $W_{comp_5} := 0 \cdot in$ | $H_{comp_5} := 0 \cdot in$ | $L_{comp_5} := 0 \ ft$ | $MemLabel_{comp_5} := "NA"$ |
| 6. Not Used | $Cd_{comp_6} := Cd_F$ | $W_{comp_6} := 0 \cdot in$ | $H_{comp_6} := 0 \cdot in$ | $L_{comp_6} := 0 \ ft$ | $MemLabel_{comp_6} := "NA"$ |

$$Weight_{ice_{comp_a}} := I_d \cdot \left((W_{comp_a} + 2 \cdot r_{ice}) \cdot (H_{comp_a} + 2 \cdot r_{ice}) - W_{comp_a} \cdot H_{comp_a} \right) \cdot 0 = [0] \ plf$$

$$SA_{comp_a} := \max(W_{comp_a}, H_{comp_a}) = [0] \ ft$$

$$SA_{ice_{comp_a}} := \max(W_{comp_a}, H_{comp_a}) + 2 \cdot r_{ice} = [0.1] \ ft$$

$$Ar_{comp_a} := 0 = [0]$$

$$Ca_{comp_a} := \begin{cases} 1.4 & \text{if } Ar_{comp_a} \leq 7 \\ 1.4 + \frac{(Ar_{comp_a} - 7) \cdot (2.0 - 1.4)}{(25 - 7)} & \text{if } 7 < Ar_{comp_a} < 25 \\ 2.0 & \text{if } Ar_{comp_a} \geq 25 \end{cases} = [1.4]$$

TIA/EIA-222-F,
Table 3

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

TIA/EIA Wind:

$$IceWind.TIA_{comp_a} := qz_{ice_{comp}} \cdot G'_H \cdot Ca_{comp_a} \cdot SA_{ice_{comp_a}} \cdot 0 = [0.0] \text{ plf}$$

$$Wind.TIA_{comp_a} := qz_{comp} \cdot G'_H \cdot Ca_{comp_a} \cdot SA_{comp_a} = [0.0] \text{ plf}$$

NESC Wind:

$$Wind.250B_{comp_a} := qz_{250B} \cdot Cd_{comp_a} \cdot \max(W_{comp_a}, H_{comp_a}) = [0.0] \text{ plf}$$

$$Wind.250C_{comp_a} := qz_{250C} \cdot G_{RF} \cdot Cd_{comp_a} \cdot \max(W_{comp_a}, H_{comp_a}) = [0.0] \text{ plf}$$

Mount Load

$b := 1..2$ <----- input number of mount slots used

| 1. Microflect Tri-Sector Mount | | | | TIA/EIA-222-F Table 3 | NESC Shape Factor |
|---------------------------------|-------------------------------------|--------------------------------|-----------------------------------|--------------------------|------------------------|
| $A_{mount_1} := 3.0 \cdot ft^2$ | $Aice_{mount_1} := 4.22 \cdot ft^2$ | $WT_{mount_1} := 101 \cdot lb$ | $WTice_{mount_1} := 150 \cdot lb$ | $Ca_{mount_1} := 1.2$ | $Cd_{mount_1} := Cd_F$ |
| 2. (3) 2.375" OD Pipe Mounts | | | | | |
| $A_{mount_2} := 0 \cdot ft^2$ | $Aice_{mount_2} := 0 \cdot ft^2$ | $WT_{mount_2} := 66 \cdot lb$ | $WTice_{mount_2} := 97 \cdot lb$ | $Ca_{mount_2} := 1.2$ | $Cd_{mount_2} := Cd_F$ |
| 3. Not Used | | | | | |
| $A_{mount_3} := 0 \cdot ft^2$ | $Aice_{mount_3} := 0 \cdot ft^2$ | $WT_{mount_3} := 0 \cdot lb$ | $WTice_{mount_3} := 0 \cdot lb$ | $Ca_{mount_3} := 1.2$ | $Cd_{mount_3} := Cd_F$ |
| 4. Not Used | | | | | |
| $A_{mount_4} := 0 \cdot ft^2$ | $Aice_{mount_4} := 0 \cdot ft^2$ | $WT_{mount_4} := 0 \cdot lb$ | $WTice_{mount_4} := 0 \cdot lb$ | $Ca_{mount_4} := 1.2$ | $Cd_{mount_4} := Cd_F$ |

TIA/EIA Wind:

$$IceWind.TIA_{mount_b} := qz_{ice_{equip}} \cdot G'_H \cdot Ca_{mount_b} \cdot Aice_{mount_b} = \begin{bmatrix} 144.1 \\ 0.0 \end{bmatrix} lbf$$

$$Wind.TIA_{mount_b} := qz_{equip} \cdot G'_H \cdot Ca_{mount_b} \cdot A_{mount_b} = \begin{bmatrix} 135.2 \\ 0.0 \end{bmatrix} lbf$$

NESC Wind:

$$Wind.250B_{mount_b} := qz_{250B} \cdot Cd_{mount_b} \cdot Aice_{mount_b} = \begin{bmatrix} 27.0 \\ 0.0 \end{bmatrix} lbf$$

$$Wind.250C_{mount_b} := qz_{250C} \cdot G'_{RF} \cdot Cd_{mount_b} \cdot A_{mount_b} = \begin{bmatrix} 208.5 \\ 0.0 \end{bmatrix} lbf$$

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

www.PaulJFord.com

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

Equipment Loads

Equipment Description

$i := 1 .. 2$ <----- input number of equip slots used

| | | | | | |
|----------------------|-------------------|----------------------------|-----------------------------|----------------------------|-------------------------------|
| 1. KMW AM-X-CD-14-65 | $QTY_{eq_1} := 3$ | $L_{eq_1} := 48 \cdot in$ | $W_{eq_1} := 11.8 \cdot in$ | $t_{eq_1} := 5.9 \cdot in$ | $WT_{eq_1} := 36.4 \cdot lbf$ |
| 2. TTAW-07BP111-001 | $QTY_{eq_2} := 3$ | $L_{eq_2} := 9.9 \cdot in$ | $W_{eq_2} := 6.7 \cdot in$ | $t_{eq_2} := 5.4 \cdot in$ | $WT_{eq_2} := 18 \cdot lbf$ |
| 3. Not Used | $QTY_{eq_3} := 0$ | $L_{eq_3} := 0 \cdot in$ | $W_{eq_3} := 0 \cdot in$ | $t_{eq_3} := 0 \cdot in$ | $WT_{eq_3} := 0 \cdot lbf$ |
| 4. Not Used | $QTY_{eq_4} := 0$ | $L_{eq_4} := 0 \cdot in$ | $W_{eq_4} := 0 \cdot in$ | $t_{eq_4} := 0 \cdot in$ | $WT_{eq_4} := 0 \cdot lbf$ |
| 5. Not Used | $QTY_{eq_5} := 0$ | $L_{eq_5} := 0 \cdot in$ | $W_{eq_5} := 0 \cdot in$ | $t_{eq_5} := 0 \cdot in$ | $WT_{eq_5} := 0 \cdot lbf$ |
| 6. Not Used | $QTY_{eq_6} := 0$ | $L_{eq_6} := 0 \cdot in$ | $W_{eq_6} := 0 \cdot in$ | $t_{eq_6} := 0 \cdot in$ | $WT_{eq_6} := 0 \cdot lbf$ |

$$Weight_{equip_i} := WT_{eq_i} \cdot QTY_{eq_i} = \begin{bmatrix} 109.2 \\ 54.0 \end{bmatrix} lbf$$

$$Weight.Ice_{equip_i} := I_d \cdot QTY_{eq_i} \cdot \left((L_{eq_i} + 2 \cdot r_{ice}) \cdot (W_{eq_i} + 2 \cdot r_{ice}) \cdot (t_{eq_i} + 2 \cdot r_{ice}) - L_{eq_i} \cdot W_{eq_i} \cdot t_{eq_i} \right) = \begin{bmatrix} 97.6 \\ 17.7 \end{bmatrix} lbf$$

$$SA_{eq_i} := L_{eq_i} \cdot W_{eq_i} = \begin{bmatrix} 3.9 \\ 0.5 \end{bmatrix} ft^2$$

$$A_{eq_i} := SA_{eq_i} \cdot QTY_{eq_i} = \begin{bmatrix} 11.8 \\ 1.4 \end{bmatrix} ft^2$$

$$SAice_{eq_i} := (L_{eq_i} + 2 \cdot r_{ice}) \cdot (W_{eq_i} + 2 \cdot r_{ice}) = \begin{bmatrix} 4.4 \\ 0.6 \end{bmatrix} ft^2$$

$$Aice_{eq_i} := SAice_{eq_i} \cdot QTY_{eq_i} = \begin{bmatrix} 13.1 \\ 1.7 \end{bmatrix} ft^2$$

$$Ar_{eq_i} := \frac{L_{eq_i}}{W_{eq_i}} = \begin{bmatrix} 4.1 \\ 1.5 \end{bmatrix}$$

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

$$C_{a_{eq_i}} := \begin{cases} \text{if } Ar_{eq_i} \leq 7 \\ \quad \parallel 1.4 \\ \text{if } 7 < Ar_{eq_i} < 25 \\ \quad \parallel 1.4 + \frac{(Ar_{eq_i} - 7) \cdot (2.0 - 1.4)}{(25 - 7)} \\ \text{if } Ar_{eq_i} \geq 25 \\ \quad \parallel 2.0 \end{cases} = \begin{bmatrix} 1.4 \\ 1.4 \end{bmatrix} \quad \text{TIA/EIA-222-F, Table 3}$$

TIA/EIA Wind:

$$IceWind.TIA_{equip_i} := qz_{ice_{equip}} \cdot G'_H \cdot C_{a_{eq_i}} \cdot A_{ice_{eq_i}} = \begin{bmatrix} 520.6 \\ 69.7 \end{bmatrix} \text{ lbf}$$

$$Wind.TIA_{equip_i} := qz_{equip} \cdot G'_H \cdot C_{a_{eq_i}} \cdot A_{eq_i} = \begin{bmatrix} 620.2 \\ 72.6 \end{bmatrix} \text{ lbf}$$

NESC Wind:

$$Wind.250B_{equip_i} := qz_{250B} \cdot C_{d_F} \cdot A_{ice_{eq_i}} = \begin{bmatrix} 83.5 \\ 11.2 \end{bmatrix} \text{ lbf}$$

$$Wind.250C_{equip_i} := qz_{250C} \cdot G'_{RF} \cdot C_{d_F} \cdot A_{eq_i} = \begin{bmatrix} 820.2 \\ 96.0 \end{bmatrix} \text{ lbf}$$

Coax Loads - Southeast Leg

Coax Cable Description

$k := 1..1$ <----- input number of coax cable slots used

| Coax Cable Description | QTY_{coax_k} | NP_{coax_k} | OD_{coax_k} | WT_{coax_k} | L_{coax_k} |
|------------------------|---------------------|--------------------|--------------------------------|---------------------------------|-----------------------------|
| 1. Heliax 1-1/4"Ø | $QTY_{coax_1} := 6$ | $NP_{coax_1} := 3$ | $OD_{coax_1} := 1.48 \cdot in$ | $WT_{coax_1} := 0.50 \cdot plf$ | $L_{coax_1} := 20 \cdot ft$ |
| 2. Not Used | $QTY_{coax_2} := 0$ | $NP_{coax_2} := 0$ | $OD_{coax_2} := 0 \cdot in$ | $WT_{coax_2} := 0 \cdot plf$ | $L_{coax_2} := 0 \cdot ft$ |
| 3. Not Used | $QTY_{coax_3} := 0$ | $NP_{coax_3} := 0$ | $OD_{coax_3} := 0 \cdot in$ | $WT_{coax_3} := 0 \cdot plf$ | $L_{coax_3} := 0 \cdot ft$ |
| 4. Not Used | $QTY_{coax_4} := 0$ | $NP_{coax_4} := 0$ | $OD_{coax_4} := 0 \cdot in$ | $WT_{coax_4} := 0 \cdot plf$ | $L_{coax_4} := 0 \cdot ft$ |
| 5. Not Used | $QTY_{coax_5} := 0$ | $NP_{coax_5} := 0$ | $OD_{coax_5} := 0 \cdot in$ | $WT_{coax_5} := 0 \cdot plf$ | $L_{coax_5} := 0 \cdot ft$ |
| 6. Not Used | $QTY_{coax_6} := 0$ | $NP_{coax_6} := 0$ | $OD_{coax_6} := 0 \cdot in$ | $WT_{coax_6} := 0 \cdot plf$ | $L_{coax_6} := 0 \cdot ft$ |

$$coaxspan := \begin{bmatrix} 29 \\ 13 \\ 15 \\ 15 \\ 12.5 \end{bmatrix} \cdot ft$$

Input coax vertical span between attachment joints for PLS Loads

$$SA_{coax_k} := NP_{coax_k} \cdot OD_{coax_k} = [0.4] ft$$

$$SA_{ice_{coax_k}} := \begin{cases} \text{if } NP_{coax_k} = 0 \\ \parallel \\ \parallel 0 \\ \parallel \text{else} \\ \parallel \parallel \left((NP_{coax_k} \cdot OD_{coax_k}) + (2 \cdot r_{ice}) \right) \end{cases} = [0.5] ft$$

$$Weight_{coax_k} := WT_{coax_k} \cdot QTY_{coax_k} = [3.0] plf$$

$$Weight.Ice_{coax_k} := \left(\frac{\pi}{4} \cdot \left((OD_{coax_k} + 2 \cdot r_{ice})^2 - OD_{coax_k}^2 \right) \cdot QTY_{coax_k} \cdot I_d \right) = [7.4] plf$$

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

$$Ar_{coax_k} := \frac{L_{coax_k}}{OD_{coax_k}} = [162.2] \quad \text{Aspect Ratio of Coax}$$

$$Ca_{coax_k} := \begin{cases} \text{if } Ar_{coax_k} \leq 7 \\ \quad || 0.8 \\ \text{if } 7 < Ar_{coax_k} < 25 \\ \quad || 0.8 + \frac{(Ar_{coax_k} - 7) \cdot (2.0 - 1.4)}{(25 - 7)} \\ \text{if } Ar_{coax_k} \geq 25 \\ \quad || 1.2 \end{cases} = [1.2] \quad \text{TIA/EIA-222-F, Table 3}$$

TIA/EIA Wind:

$$IceWind.TIA_{coax_k} := qz_{ice_{coax}} \cdot G'_H \cdot Ca_{coax_k} \cdot SA_{ice_{coax_k}} = [14.8] \text{ plf}$$

$$Wind.TIA_{coax_k} := qz_{coax} \cdot G'_H \cdot Ca_{coax_k} \cdot SA_{coax_k} = [16.0] \text{ plf}$$

NESC Wind for Coax on Pipe Mast Risa Model:

$$Wind.250B_{coax.pipe.k} := qz_{250B} \cdot Cd_{coax} \cdot SA_{ice_{coax_k}} = [2.6] \text{ plf}$$

$$Wind.250C_{coax.pipe.Above_k} := qz_{250C} \cdot G'_{RF} \cdot Cd_{coax} \cdot SA_{coax_k} = [23.3] \text{ plf}$$

$$Wind.250C_{coax.pipe.Below_k} := qz_{250C} \cdot G_{RF} \cdot Cd_{coax} \cdot SA_{coax_k} = [18.6] \text{ plf}$$

NESC Loads For PLS Model:

$$Weight.250B_{coax.twr} := \left(\sum Weight_{coax} + \sum Weight.Ice_{coax} \right) \cdot coaxspan \cdot OLF250B_V$$

$$Wind.250B_{coax.twr} := qz_{250B} \cdot Cd_{coax} \cdot \left(\sum SA_{ice_{coax}} \right) \cdot coaxspan \cdot OLF250B_T$$

$$Weight.250C_{coax.twr} := \left(\sum Weight_{coax} \right) \cdot coaxspan \cdot OLF250C_V$$

$$Wind.250C_{coax.twr} := qz_{250C} \cdot G_{RF} \cdot Cd_{coax} \cdot \left(\sum SA_{coax} \right) \cdot coaxspan \cdot OLF250C_T$$

Summary of Loads - PLS Coax Load Inputs

NESC 250B_X-dir - Wind w/ Ice

| Joint Label | Vertical Load (lbs) | Transverse Load (lbs) | Longitudinal Load (lbs) | Load Comment |
|-------------|---------------------|-----------------------|-------------------------|--------------|
| C1Y | 452 | 190 | 0 | Coax Load |
| C2Y | 203 | 85 | 0 | Coax Load |
| C3Y | 234 | 98 | 0 | Coax Load |
| C4Y | 234 | 98 | 0 | Coax Load |
| C5Y | 195 | 82 | 0 | Coax Load |

NESC 250C_X-dir - Wind w/o Ice

| Joint Label | Vertical Load (lbs) | Transverse Load (lbs) | Longitudinal Load (lbs) | Load Comment |
|-------------|---------------------|-----------------------|-------------------------|--------------|
| C1Y | 87 | 541 | 0 | Coax Load |
| C2Y | 39 | 242 | 0 | Coax Load |
| C3Y | 45 | 280 | 0 | Coax Load |
| C4Y | 45 | 280 | 0 | Coax Load |
| C5Y | 38 | 233 | 0 | Coax Load |

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

www.PaulJFord.com

Orlando

1801 Lee Rd, Suite 230

Winter Park, FL 32789

Phone 407.898.9039

100% Employee Owned

Summary of Loads - Risa Loads Inputs

BLC 2 Weight of Equipment

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | Y | -101.0 | 43.0 |
| M2 | Y | -66.0 | 43.0 |
| M2 | Y | 0.0 | 43.0 |
| M2 | Y | 0.0 | 43.0 |
| M2 | Y | -109.2 | 43.0 |
| M2 | Y | -54.0 | 43.0 |
| M2 | Y | | 43.0 |
| M2 | Y | | 43.0 |
| M2 | Y | | 43.0 |
| M2 | Y | | 43.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads - Rows 1-6: Coax 1-6 Weight

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | Y | -3.0 | -3.0 | 23.0 | 43.0 |
| M2 | Y | 0.0 | 0.0 | 23.0 | 43.0 |
| M2 | Y | 0.0 | 0.0 | 23.0 | 43.0 |
| M2 | Y | 0.0 | 0.0 | 23.0 | 43.0 |
| M2 | Y | 0.0 | 0.0 | 23.0 | 43.0 |
| M2 | Y | 0.0 | 0.0 | 23.0 | 43.0 |

BLC 3 Weight of Ice on Mast & Equipment

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | Y | -150.0 | 43.0 |
| M2 | Y | -97.0 | 43.0 |
| M2 | Y | 0.0 | 43.0 |
| M2 | Y | 0.0 | 43.0 |
| M2 | Y | -97.6 | 43.0 |
| M2 | Y | -17.7 | 43.0 |
| M2 | Y | | 43.0 |
| M2 | Y | | 43.0 |
| M2 | Y | | 43.0 |
| M2 | Y | | 43.0 |
| M2 | Y | | 43.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Weight of Ice on Mast

Rows 2-7: Coax 1-6

Rows 8-13: Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | Y | 0.0 | 0.0 | 0.0 | 0.0 |
| M2 | Y | -7.4 | -7.4 | 23.0 | 43.0 |
| M2 | Y | | | 23.0 | 43.0 |
| M2 | Y | | | 23.0 | 43.0 |
| M2 | Y | | | 23.0 | 43.0 |
| M2 | Y | | | 23.0 | 43.0 |
| M2 | Y | | | 23.0 | 43.0 |
| NA | Y | 0.0 | 0.0 | 0.0 | 0.0 |
| NA | Y | | | 0.0 | 0.0 |
| NA | Y | | | 0.0 | 0.0 |
| NA | Y | | | 0.0 | 0.0 |
| NA | Y | | | 0.0 | 0.0 |
| NA | Y | | | 0.0 | 0.0 |

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

Orlando

1801 Lee Rd, Suite 230

Winter Park, FL 32789

Phone 407.898.9039

100% Employee Owned

BLC 4 TIA_X-dir - Wind w/ Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 144.1 | 43.0 |
| M2 | X | 0.0 | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | 520.6 | 43.0 |
| M2 | X | 69.7 | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 0.0 | 0.0 | 0.0 | 0.0 |
| M2 | PX | 14.8 | 14.8 | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| NA | PX | 0.0 | 0.0 | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |

BLC 5 TIA_X-dir - Wind w/o Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 135.2 | 43.0 |
| M2 | X | 0.0 | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | 620.2 | 43.0 |
| M2 | X | 72.6 | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 0.0 | 0.0 | 0.0 | 0.0 |
| M2 | PX | 16.0 | 16.0 | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| NA | PX | 0.0 | 0.0 | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |

BLC 6 TIA_Z-dir - Wind w/ Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | Z | 144.1 | 43.0 |
| M2 | Z | 0.0 | 43.0 |
| M2 | Z | | 43.0 |
| M2 | Z | | 43.0 |
| M2 | Z | 520.6 | 43.0 |
| M2 | Z | 69.7 | 43.0 |
| M2 | Z | | 43.0 |
| M2 | Z | | 43.0 |
| M2 | Z | | 43.0 |
| M2 | Z | | 43.0 |
| M2 | Z | | 43.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PZ | 0.0 | 0.0 | 0.0 | 0.0 |
| M2 | PZ | 14.8 | 14.8 | 23.0 | 43.0 |
| M2 | PZ | | | 23.0 | 43.0 |
| M2 | PZ | | | 23.0 | 43.0 |
| M2 | PZ | | | 23.0 | 43.0 |
| M2 | PZ | | | 23.0 | 43.0 |
| M2 | PZ | | | 23.0 | 43.0 |
| NA | PZ | 0.0 | 0.0 | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |

BLC 7 TIA_Z-dir - Wind w/o Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | Z | 135.2 | 43.0 |
| M2 | Z | 0.0 | 43.0 |
| M2 | Z | | 43.0 |
| M2 | Z | | 43.0 |
| M2 | Z | 620.2 | 43.0 |
| M2 | Z | 72.6 | 43.0 |
| M2 | Z | | 43.0 |
| M2 | Z | | 43.0 |
| M2 | Z | | 43.0 |
| M2 | Z | | 43.0 |
| M2 | Z | | 43.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PZ | 0.0 | 0.0 | 0.0 | 0.0 |
| M2 | PZ | 16.0 | 16.0 | 23.0 | 43.0 |
| M2 | PZ | | | 23.0 | 43.0 |
| M2 | PZ | | | 23.0 | 43.0 |
| M2 | PZ | | | 23.0 | 43.0 |
| M2 | PZ | | | 23.0 | 43.0 |
| M2 | PZ | | | 23.0 | 43.0 |
| NA | PZ | 0.0 | 0.0 | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |

BLC 8 NESC 250B_X-dir - Wind w/ Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 27.0 | 43.0 |
| M2 | X | 0.0 | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | 83.5 | 43.0 |
| M2 | X | 11.2 | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 0.0 | 0.0 | 0.0 | 0.0 |
| M2 | PX | 2.6 | 2.6 | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| M2 | PX | | | 23.0 | 43.0 |
| NA | PX | 0.0 | 0.0 | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |

Columbus

250 E Broad St, Suite 600
 Columbus, OH 43215
 Phone 614.221.6679
 Founded in 1965

Orlando

1801 Lee Rd, Suite 230
 Winter Park, FL 32789
 Phone 407.898.9039
 100% Employee Owned

BLC 9 NESC 250C_X-dir - Wind w/o Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 208.5 | 43.0 |
| M2 | X | 0.0 | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | 820.2 | 43.0 |
| M2 | X | 96.0 | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |
| M2 | X | | 43.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast Above Top of Tower

Row 2-7: Wind on Coax 1-6 Above Top of Tower

Row 8: Wind on Mast Below Top of Tower

Row 9-14: Wind on Coax 1-6 Below Top of Tower

Row 15-20: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 0.0 | 0.0 | 32.0 | 55.0 |
| M2 | PX | 23.3 | 23.3 | 32.0 | 43.0 |
| M2 | PX | | | 32.0 | 43.0 |
| M2 | PX | | | 32.0 | 43.0 |
| M2 | PX | | | 32.0 | 43.0 |
| M2 | PX | | | 32.0 | 43.0 |
| M2 | PX | | | 32.0 | 43.0 |
| M2 | PX | 0.0 | 0.0 | 0.0 | 32.0 |
| M2 | PX | 18.6 | 18.6 | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| NA | PX | 0.0 | 0.0 | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |

Equipment Loads (Tubular Pole on Lattice Structure) - North Mast - T-Mobile

Constants

| | |
|------------------------------|--|
| $h_{lattice} := 94 \cdot ft$ | height of lattice structure |
| $h_{mast} := 117 \cdot ft$ | Top of Mast AGL |
| $b_{mast} := 62 \cdot ft$ | Bot. of Mast AGL |
| $b_{coax} := 85 \cdot ft$ | Bot. of Coax AGL (on mast) |
| $z_{equip} := 114 \cdot ft$ | elevation of equip. |
| $z_{coax} := 90.5 \cdot ft$ | elevation to CL of coax section for TIA wind (linear appurtance) |
| $z_{pipe} := 90.5 \cdot ft$ | elevation to CL of pipe section for TIA wind |
| $r_{ice} := 0.5 \cdot in$ | Radial Ice, Tia & NESC |

NESC Shape Factors:

$Cd_R := 1.3 \quad Cd_F := 1.6 \quad Cd_{coax} := 1.45$

NESC Overload Factors:

| | |
|-----------------------|--------------------------|
| $OLF_{250B_V} := 1.5$ | 250B Vertical OLF |
| $OLF_{250B_T} := 2.5$ | 250B Transverse Wind OLF |
| $OLF_{250C_V} := 1.0$ | 250C Vertical OLF |
| $OLF_{250C_T} := 1.0$ | 250C Transverse Wind OLF |

$I_d := 57 \cdot pcf$ Ice Density

TIA/EIA Wind

| | |
|-------------------|-------------------------------|
| $V_{tia} := 85$ | TIA Basic Wind Speed |
| $V_{i.tia} := 74$ | TIA Basic Wind Speed with Ice |

NESC Wind

| | |
|----------------------|---|
| $V_{nesc} := 110$ | NESC 250C 3 sec Gust Speed per OTRM 060 |
| $V_{i.nesc} := 39.5$ | NESC 250B 3 sec Gust Speed with Ice |

$I := 1.0$ NESC Importance Factor

$E_s := 0.346 \cdot \left(\frac{33}{\left(0.67 \cdot \frac{h_{mast}}{ft} \right)} \right)^{\frac{1}{7}} = 0.306$ NESC Factors, Table 250-3

$B_s := \frac{1}{\left(1 + \frac{0.56 \cdot \left(0.67 \cdot \frac{h_{mast}}{ft} \right)}{220} \right)} = 0.834$ NESC Factors, Table 250-3

$k_v := 1.43$ NESC Constant, Table 250-3

$$G_H := \left\| \begin{array}{l} \text{if } 0.65 + \left(\frac{0.60}{\left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}}} \right) \leq 1 \\ \left\| \begin{array}{l} 1 \\ \text{also if } 0.65 + \left(\frac{0.60}{\left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}}} \right) \geq 1.25 \\ \left\| \begin{array}{l} 1.25 \\ \text{else} \\ \left\| \begin{array}{l} 0.65 + \left(\frac{0.60}{\left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}}} \right) \end{array} \right\| \end{array} \right\| \end{array} \right\| \end{array} \right.$$

$G_H = 1.167$ Calculated GRF, Sec. 2.3.4.1

$m_{grf.pole} := 1.25$ GRF Multiplier, Sec. 2.3.4.4

$G'_H := G_H \cdot m_{grf.pole} = 1.458$ Final GRF of pole on lattice, Sec. 2.3.4.4

$G_{RF} := \frac{(1 + (2.7 \cdot E_s \cdot B_s^{0.5}))}{k_v^2} = 0.858$ Calculated GRF, Table 250-3

$m_{grf} := 1.25$ NEU specified multiplier for 250C (OTRM 059.1, Attachment A)

$G'_{RF} := G_{RF} \cdot m_{grf} = 1.072$ Calculated GRF for 250C

TIA/EIA Exposure Coefficients:

$$Kz_{equip} := \left(\frac{z_{equip}}{33 \cdot ft} \right)^{\frac{2}{7}} = 1.425$$

$$Kz_{coax} := \left(\frac{z_{coax}}{33 \cdot ft} \right)^{\frac{2}{7}} = 1.334$$

Section Average Height Above Ground for Wind Load

$$Kz_{pipe} := \left(\frac{z_{pipe}}{33 \cdot ft} \right)^{\frac{2}{7}} = 1.334$$

Section Average Height Above Ground for Wind Load

NESC Exposure Coefficient:

$$k_z := 2.01 \cdot \left(\frac{h_{mast}}{900 \cdot ft} \right)^{\frac{2}{9.5}} = 1.308$$

Calculated k_z per Table 250-2

TIA/EIA Wind Pressure:

$$qz_{ice_{equip}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{equip} = 20 \text{ psf}$$

$$qz_{equip} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{equip} = 26.4 \text{ psf}$$

$$qz_{ice_{coax}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{coax} = 18.7 \text{ psf}$$

$$qz_{coax} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{coax} = 24.7 \text{ psf}$$

$$qz_{ice_{pipe}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{pipe} = 18.7 \text{ psf}$$

$$qz_{pipe} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{pipe} = 24.7 \text{ psf}$$

$$qz_{ice_{comp}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{pipe} = 18.7 \text{ psf}$$

$$qz_{comp} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{pipe} = 24.7 \text{ psf}$$

NESC Wind Pressure:

$$qz_{250B} := 0.00256 \cdot V_{i.nesc}^2 \cdot I \cdot psf = 4.0 \text{ psf}$$

$$qz_{250C} := 0.00256 \cdot k_z \cdot V_{nesc}^2 \cdot I \cdot psf = 40.5 \text{ psf}$$

Pipe Extension Loads

Constants

$OD := 12.75 \cdot \text{in}$ outer diameter of pipe riser

$L_{\text{pipe}} := 55 \text{ ft}$ Length of pipe riser

$MemberLabel_{\text{pipe}} := \text{"M2"}$ Member Label in Risa

$$Weight_{ice_{\text{pipe}}} := I_d \cdot \frac{\pi}{4} \cdot \left((OD + 2 \cdot r_{ice})^2 - OD^2 \right) = 8.2 \text{ plf}$$

$SA_{\text{pipe}} := OD = 1.063 \text{ ft}$ Projected Surface Area of Pipe

$SA_{ice_{\text{pipe}}} := OD + (2 \cdot r_{ice}) = 1.146 \text{ ft}$ Projected Surface Area of Pipe with Ice

TIA/EIA Wind:

$$Ar_{\text{pipe}} := \frac{L_{\text{pipe}}}{OD} = 51.765$$

$$Ca_{\text{pipe}} := \begin{cases} \text{if } Ar_{\text{pipe}} \leq 7 & 0.8 \\ \text{if } 7 < Ar_{\text{pipe}} < 25 & 0.8 + \frac{(Ar_{\text{pipe}} - 7) \cdot (1.2 - 0.8)}{(25 - 7)} \\ \text{if } Ar_{\text{pipe}} \geq 25 & 1.2 \end{cases} = 1.2 \quad \text{Table 1}$$

$$Wind.TIA_{\text{pipe}} := qz_{\text{pipe}} \cdot G'_H \cdot Ca_{\text{pipe}} \cdot SA_{\text{pipe}} = 45.9 \text{ plf}$$

$$IceWind.TIA_{\text{pipe}} := qz_{ice_{\text{pipe}}} \cdot G'_H \cdot Ca_{\text{pipe}} \cdot SA_{ice_{\text{pipe}}} = 37.5 \text{ plf}$$

NESC Wind:

$$Wind.250B_{\text{pipe}} := qz_{250B} \cdot Cd_R \cdot SA_{ice_{\text{pipe}}} = 5.9 \text{ plf}$$

Wind Pressure Above Top of Tower:

$$Wind.250C_{\text{pipe.Above}} := qz_{250C} \cdot G'_{RF} \cdot Cd_R \cdot SA_{\text{pipe}} = 60.0 \text{ plf}$$

Wind Pressure Below Top of Tower:

$$Wind.250C_{\text{pipe.Below}} := qz_{250C} \cdot G'_{RF} \cdot Cd_R \cdot SA_{\text{pipe}} = 48.0 \text{ plf}$$

Mast Component Loads

$a := 1 \dots 4$ <----- input number of component slots used

Component Description

| | | | | | |
|---------------------|-----------------------|----------------------------|----------------------------|---------------------------------|-------------------------------------|
| 1. 6x6x1/4 Hor Tube | $Cd_{comp_1} := Cd_F$ | $W_{comp_1} := 6 \cdot in$ | $H_{comp_1} := 6 \cdot in$ | $L_{comp_1} := 7 \text{ ft}$ | $MemLabel_{comp_1} := \text{"M4"}$ |
| 2. 6x6x1/4 Hor Tube | $Cd_{comp_2} := Cd_F$ | $W_{comp_2} := 6 \cdot in$ | $H_{comp_2} := 6 \cdot in$ | $L_{comp_2} := 7 \text{ ft}$ | $MemLabel_{comp_2} := \text{"M7"}$ |
| 3. 6x6x1/4 Hor Tube | $Cd_{comp_3} := Cd_F$ | $W_{comp_3} := 6 \cdot in$ | $H_{comp_3} := 6 \cdot in$ | $L_{comp_3} := 1.08 \text{ ft}$ | $MemLabel_{comp_3} := \text{"M9"}$ |
| 4. 6x6x1/4 Hor Tube | $Cd_{comp_4} := Cd_F$ | $W_{comp_4} := 6 \cdot in$ | $H_{comp_4} := 6 \cdot in$ | $L_{comp_4} := 1.08 \text{ ft}$ | $MemLabel_{comp_4} := \text{"M10"}$ |
| 5. Not Used | $Cd_{comp_5} := Cd_F$ | $W_{comp_5} := 0 \cdot in$ | $H_{comp_5} := 0 \cdot in$ | $L_{comp_5} := 0 \text{ ft}$ | $MemLabel_{comp_5} := \text{"M4"}$ |
| 6. Not Used | $Cd_{comp_6} := Cd_F$ | $W_{comp_6} := 0 \cdot in$ | $H_{comp_6} := 0 \cdot in$ | $L_{comp_6} := 0 \text{ ft}$ | $MemLabel_{comp_6} := \text{"M4"}$ |

$$Weight_{ice_{comp_a}} := I_d \cdot \left((W_{comp_a} + 2 \cdot r_{ice}) \cdot (H_{comp_a} + 2 \cdot r_{ice}) - W_{comp_a} \cdot H_{comp_a} \right) = \begin{bmatrix} 5.1 \\ 5.1 \\ 5.1 \\ 5.1 \end{bmatrix} \text{ plf}$$

$$SA_{comp_a} := \max(W_{comp_a}, H_{comp_a}) = \begin{bmatrix} 0.5 \\ 0.5 \\ 0.5 \\ 0.5 \end{bmatrix} \text{ ft}$$

$$SA_{ice_{comp_a}} := \max(W_{comp_a}, H_{comp_a}) + 2 \cdot r_{ice} = \begin{bmatrix} 0.6 \\ 0.6 \\ 0.6 \\ 0.6 \end{bmatrix} \text{ ft}$$

$$Ar_{comp_a} := \frac{L_{comp_a}}{\max(W_{comp_a}, H_{comp_a})} = \begin{bmatrix} 14 \\ 14 \\ 2.2 \\ 2.2 \end{bmatrix}$$

$$Ca_{comp_a} := \begin{cases} \text{if } Ar_{comp_a} \leq 7 \\ \quad \parallel 1.4 \\ \text{if } 7 < Ar_{comp_a} < 25 \\ \quad \parallel 1.4 + \frac{(Ar_{comp_a} - 7) \cdot (2.0 - 1.4)}{(25 - 7)} \\ \text{if } Ar_{comp_a} \geq 25 \\ \quad \parallel 2.0 \end{cases} = \begin{bmatrix} 1.6 \\ 1.6 \\ 1.4 \\ 1.4 \end{bmatrix}$$

TIA/EIA-222-F,
Table 3

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

www.PaulJFord.com

Orlando

1801 Lee Rd, Suite 230

Winter Park, FL 32789

Phone 407.898.9039

100% Employee Owned

TIA/EIA Wind:

$$IceWind.TIA_{comp_a} := qz_{ice_{comp}} \cdot G'_H \cdot Ca_{comp_a} \cdot SA_{ice_{comp_a}} = \begin{bmatrix} 26.0 \\ 26.0 \\ 22.3 \\ 22.3 \end{bmatrix} \text{plf}$$

$$Wind.TIA_{comp_a} := qz_{comp} \cdot G'_H \cdot Ca_{comp_a} \cdot SA_{comp_a} = \begin{bmatrix} 29.4 \\ 29.4 \\ 25.2 \\ 25.2 \end{bmatrix} \text{plf}$$

NESC Wind:

$$Wind.250B_{comp_a} := qz_{250B} \cdot Cd_{comp_a} \cdot \max(W_{comp_a}, H_{comp_a}) = \begin{bmatrix} 3.2 \\ 3.2 \\ 3.2 \\ 3.2 \end{bmatrix} \text{plf}$$

$$Wind.250C_{comp_a} := qz_{250C} \cdot G_{RF} \cdot Cd_{comp_a} \cdot \max(W_{comp_a}, H_{comp_a}) = \begin{bmatrix} 27.8 \\ 27.8 \\ 27.8 \\ 27.8 \end{bmatrix} \text{plf}$$

Mount Load

$b := 1..2$ <----- input number of mount slots used

| 1. Microflect Tri-Sector Mount | | | | TIA/EIA-222-F Table 3 | NESC Shape Factor |
|---------------------------------|-------------------------------------|--------------------------------|-----------------------------------|--------------------------|------------------------|
| $A_{mount_1} := 3.0 \cdot ft^2$ | $Aice_{mount_1} := 4.22 \cdot ft^2$ | $WT_{mount_1} := 101 \cdot lb$ | $WTice_{mount_1} := 150 \cdot lb$ | $Ca_{mount_1} := 1.2$ | $Cd_{mount_1} := Cd_F$ |
| 2. (3) 2.375" OD Pipe Mounts | | | | | |
| $A_{mount_2} := 0 \cdot ft^2$ | $Aice_{mount_2} := 0 \cdot ft^2$ | $WT_{mount_2} := 66 \cdot lb$ | $WTice_{mount_2} := 97 \cdot lb$ | $Ca_{mount_2} := 1.2$ | $Cd_{mount_2} := Cd_F$ |
| 3. Not Used | | | | | |
| $A_{mount_3} := 0 \cdot ft^2$ | $Aice_{mount_3} := 0 \cdot ft^2$ | $WT_{mount_3} := 0 \cdot lb$ | $WTice_{mount_3} := 0 \cdot lb$ | $Ca_{mount_3} := 1.2$ | $Cd_{mount_3} := Cd_F$ |
| 4. Not Used | | | | | |
| $A_{mount_4} := 0 \cdot ft^2$ | $Aice_{mount_4} := 0 \cdot ft^2$ | $WT_{mount_4} := 0 \cdot lb$ | $WTice_{mount_4} := 0 \cdot lb$ | $Ca_{mount_4} := 1.2$ | $Cd_{mount_4} := Cd_F$ |

TIA/EIA Wind:

$$IceWind.TIA_{mount_b} := qz_{ice_{equip}} \cdot G'_H \cdot Ca_{mount_b} \cdot Aice_{mount_b} = \begin{bmatrix} 147.5 \\ 0.0 \end{bmatrix} lbf$$

$$Wind.TIA_{mount_b} := qz_{equip} \cdot G'_H \cdot Ca_{mount_b} \cdot A_{mount_b} = \begin{bmatrix} 138.4 \\ 0.0 \end{bmatrix} lbf$$

NESC Wind:

$$Wind.250B_{mount_b} := qz_{250B} \cdot Cd_{mount_b} \cdot Aice_{mount_b} = \begin{bmatrix} 27.0 \\ 0.0 \end{bmatrix} lbf$$

$$Wind.250C_{mount_b} := qz_{250C} \cdot G'_{RF} \cdot Cd_{mount_b} \cdot A_{mount_b} = \begin{bmatrix} 208.5 \\ 0.0 \end{bmatrix} lbf$$

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

www.PaulJFord.com

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

Equipment Loads

Equipment Description

$i := 1 .. 1$ <----- input number of equip slots used

| | | | | | |
|---------------------------|-------------------|-----------------------------|-----------------------------|-----------------------------|-------------------------------|
| 1. APX16DWV-16DWVS-E-A20) | $QTY_{eq_1} := 3$ | $L_{eq_1} := 55.9 \cdot in$ | $W_{eq_1} := 13.0 \cdot in$ | $t_{eq_1} := 3.15 \cdot in$ | $WT_{eq_1} := 40.7 \cdot lbf$ |
| 2. Not Used | $QTY_{eq_2} := 0$ | $L_{eq_2} := 0 \cdot in$ | $W_{eq_2} := 0 \cdot in$ | $t_{eq_2} := 0 \cdot in$ | $WT_{eq_2} := 0 \cdot lbf$ |
| 3. Not Used | $QTY_{eq_3} := 0$ | $L_{eq_3} := 0 \cdot in$ | $W_{eq_3} := 0 \cdot in$ | $t_{eq_3} := 0 \cdot in$ | $WT_{eq_3} := 0 \cdot lbf$ |
| 4. Not Used | $QTY_{eq_4} := 0$ | $L_{eq_4} := 0 \cdot in$ | $W_{eq_4} := 0 \cdot in$ | $t_{eq_4} := 0 \cdot in$ | $WT_{eq_4} := 0 \cdot lbf$ |
| 5. Not Used | $QTY_{eq_5} := 0$ | $L_{eq_5} := 0 \cdot in$ | $W_{eq_5} := 0 \cdot in$ | $t_{eq_5} := 0 \cdot in$ | $WT_{eq_5} := 0 \cdot lbf$ |
| 6. Not Used | $QTY_{eq_6} := 0$ | $L_{eq_6} := 0 \cdot in$ | $W_{eq_6} := 0 \cdot in$ | $t_{eq_6} := 0 \cdot in$ | $WT_{eq_6} := 0 \cdot lbf$ |

$$Weight_{equip_i} := WT_{eq_i} \cdot QTY_{eq_i} = [122.1] \text{ lbf}$$

$$Weight.Ice_{equip_i} := I_d \cdot QTY_{eq_i} \cdot \left((L_{eq_i} + 2 \cdot r_{ice}) \cdot (W_{eq_i} + 2 \cdot r_{ice}) \cdot (t_{eq_i} + 2 \cdot r_{ice}) - L_{eq_i} \cdot W_{eq_i} \cdot t_{eq_i} \right) = [100.6] \text{ lbf}$$

$$SA_{eq_i} := L_{eq_i} \cdot W_{eq_i} = [5.0] \text{ ft}^2$$

$$A_{eq_i} := SA_{eq_i} \cdot QTY_{eq_i} = [15.1] \text{ ft}^2$$

$$SA_{ice_{eq_i}} := (L_{eq_i} + 2 \cdot r_{ice}) \cdot (W_{eq_i} + 2 \cdot r_{ice}) = [5.5] \text{ ft}^2$$

$$A_{ice_{eq_i}} := SA_{ice_{eq_i}} \cdot QTY_{eq_i} = [16.6] \text{ ft}^2$$

$$Ar_{eq_i} := \frac{L_{eq_i}}{W_{eq_i}} = [4.3]$$

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

$$Ca_{eq_i} := \begin{cases} \text{if } Ar_{eq_i} \leq 7 \\ \quad \parallel 1.4 \\ \text{if } 7 < Ar_{eq_i} < 25 \\ \quad \parallel 1.4 + \frac{(Ar_{eq_i} - 7) \cdot (2.0 - 1.4)}{(25 - 7)} \\ \text{if } Ar_{eq_i} \geq 25 \\ \quad \parallel 2.0 \end{cases} = [1.4] \quad \text{TIA/EIA-222-F, Table 3}$$

TIA/EIA Wind:

$$IceWind.TIA_{equip_i} := qz_{ice_{equip}} \cdot G'_H \cdot Ca_{eq_i} \cdot A_{ice_{eq_i}} = [676.9] \text{ lbf}$$

$$Wind.TIA_{equip_i} := qz_{equip} \cdot G'_H \cdot Ca_{eq_i} \cdot A_{eq_i} = [814.7] \text{ lbf}$$

NESC Wind:

$$Wind.250B_{equip_i} := qz_{250B} \cdot Cd_F \cdot A_{ice_{eq_i}} = [106.1] \text{ lbf}$$

$$Wind.250C_{equip_i} := qz_{250C} \cdot G'_{RF} \cdot Cd_F \cdot A_{eq_i} = [1052.3] \text{ lbf}$$

Coax Loads - Northeast Leg

Coax Cable Description

$k := 1 .. 1$ <----- input number of coax cable slots used

| Coax Cable Description | QTY_{coax_k} | NP_{coax_k} | OD_{coax_k} | WT_{coax_k} | L_{coax_k} |
|------------------------|----------------------|--------------------|--------------------------------|---------------------------------|-----------------------------|
| 1. Heliax 1-1/4"Ø | $QTY_{coax_1} := 12$ | $NP_{coax_1} := 6$ | $OD_{coax_1} := 1.48 \cdot in$ | $WT_{coax_1} := 0.50 \cdot plf$ | $L_{coax_1} := 20 \cdot ft$ |
| 2. Heliax 1-1/4"Ø | $QTY_{coax_2} := 0$ | $NP_{coax_2} := 0$ | $OD_{coax_2} := 0 \cdot in$ | $WT_{coax_2} := 0 \cdot plf$ | $L_{coax_2} := 0 \cdot ft$ |
| 3. Not Used | $QTY_{coax_3} := 0$ | $NP_{coax_3} := 0$ | $OD_{coax_3} := 0 \cdot in$ | $WT_{coax_3} := 0 \cdot plf$ | $L_{coax_3} := 0 \cdot ft$ |
| 4. Not Used | $QTY_{coax_4} := 0$ | $NP_{coax_4} := 0$ | $OD_{coax_4} := 0 \cdot in$ | $WT_{coax_4} := 0 \cdot plf$ | $L_{coax_4} := 0 \cdot ft$ |
| 5. Not Used | $QTY_{coax_5} := 0$ | $NP_{coax_5} := 0$ | $OD_{coax_5} := 0 \cdot in$ | $WT_{coax_5} := 0 \cdot plf$ | $L_{coax_5} := 0 \cdot ft$ |
| 6. Not Used | $QTY_{coax_6} := 0$ | $NP_{coax_6} := 0$ | $OD_{coax_6} := 0 \cdot in$ | $WT_{coax_6} := 0 \cdot plf$ | $L_{coax_6} := 0 \cdot ft$ |

$$coaxspan := \begin{bmatrix} 29 \\ 13 \\ 15 \\ 15 \\ 12.5 \end{bmatrix} \cdot ft$$

Input coax vertical span between attachment joints for PLS Loads

$$SA_{coax_k} := NP_{coax_k} \cdot OD_{coax_k} = [0.7] ft$$

$$SA_{ice_{coax_k}} := \begin{cases} \parallel & \text{if } NP_{coax_k} = 0 \\ \parallel & \parallel 0 \\ \parallel & \text{else} \\ \parallel & \parallel \left((NP_{coax_k} \cdot OD_{coax_k}) + (2 \cdot r_{ice}) \right) \\ \parallel & \parallel \end{cases} = [0.8] ft$$

$$Weight_{coax_k} := WT_{coax_k} \cdot QTY_{coax_k} = [6.0] plf$$

$$Weight.Ice_{coax_k} := \left(\frac{\pi}{4} \cdot \left((OD_{coax_k} + 2 \cdot r_{ice})^2 - OD_{coax_k}^2 \right) \cdot QTY_{coax_k} \cdot I_d \right) = [14.8] plf$$

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

$$Ar_{coax_k} := \frac{L_{coax_k}}{OD_{coax_k}} = [162.2] \quad \text{Aspect Ratio of Coax}$$

$$Ca_{coax_k} := \begin{cases} \text{if } Ar_{coax_k} \leq 7 & 0.8 \\ \text{if } 7 < Ar_{coax_k} < 25 & 0.8 + \frac{(Ar_{coax_k} - 7) \cdot (2.0 - 1.4)}{(25 - 7)} \\ \text{if } Ar_{coax_k} \geq 25 & 1.2 \end{cases} = [1.2] \quad \text{TIA/EIA-222-F, Table 3}$$

TIA/EIA Wind:

$$IceWind.TIA_{coax_k} := qz_{ice_{coax}} \cdot G'_H \cdot Ca_{coax_k} \cdot SA_{ice_{coax_k}} = [26.9] \text{ plf}$$

$$Wind.TIA_{coax_k} := qz_{coax} \cdot G'_H \cdot Ca_{coax_k} \cdot SA_{coax_k} = [32.0] \text{ plf}$$

NESC Wind for Coax on Pipe Mast Risa Model:

$$Wind.250B_{coax.pipe_k} := qz_{250B} \cdot Cd_{coax} \cdot SA_{ice_{coax_k}} = [4.8] \text{ plf}$$

$$Wind.250C_{coax.pipe.Above_k} := qz_{250C} \cdot G'_{RF} \cdot Cd_{coax} \cdot SA_{coax_k} = [46.6] \text{ plf}$$

$$Wind.250C_{coax.pipe.Below_k} := qz_{250C} \cdot G_{RF} \cdot Cd_{coax} \cdot SA_{coax_k} = [37.3] \text{ plf}$$

NESC Loads For PLS Model:

$$Weight.250B_{coax.twr} := \left(\sum Weight_{coax} + \sum Weight.Ice_{coax} \right) \cdot coaxspan \cdot OLF250B_V$$

$$Wind.250B_{coax.twr} := qz_{250B} \cdot Cd_{coax} \cdot \left(\sum SA_{ice_{coax}} \right) \cdot coaxspan \cdot OLF250B_T$$

$$Weight.250C_{coax.twr} := \left(\sum Weight_{coax} \right) \cdot coaxspan \cdot OLF250C_V$$

$$Wind.250C_{coax.twr} := qz_{250C} \cdot G_{RF} \cdot Cd_{coax} \cdot \left(\sum SA_{coax} \right) \cdot coaxspan \cdot OLF250C_T$$

Summary of Loads - PLS Coax Load Inputs

NESC 250B_X-dir - Wind w/ Ice

| Joint Label | Vertical Load (lbs) | Transverse Load (lbs) | Longitudinal Load (lbs) | Load Comment |
|-------------|---------------------|-----------------------|-------------------------|--------------|
| C1XY | 904 | 346 | 0 | Coax Load |
| C2XY | 405 | 155 | 0 | Coax Load |
| C3XY | 467 | 179 | 0 | Coax Load |
| C4XY | 467 | 179 | 0 | Coax Load |
| C5XY | 390 | 149 | 0 | Coax Load |

NESC 250C_X-dir - Wind w/o Ice

| Joint Label | Vertical Load (lbs) | Transverse Load (lbs) | Longitudinal Load (lbs) | Load Comment |
|-------------|---------------------|-----------------------|-------------------------|--------------|
| C1XY | 174 | 1081 | 0 | Coax Load |
| C2XY | 78 | 485 | 0 | Coax Load |
| C3XY | 90 | 559 | 0 | Coax Load |
| C4XY | 90 | 559 | 0 | Coax Load |
| C5XY | 75 | 466 | 0 | Coax Load |

Summary of Loads - Risa Loads Inputs

BLC 2 Weight of Equipment

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft, %] |
|--------------|-----------|---------------------|------------------|
| M2 | Y | -101.0 | 52.0 |
| M2 | Y | -66.0 | 52.0 |
| M2 | Y | 0.0 | 52.0 |
| M2 | Y | 0.0 | 52.0 |
| M2 | Y | -122.1 | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads - Rows 1-6: Coax 1-6 Weight

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft, %] | End Location [ft, %] |
|--------------|-----------|-------------------------|-----------------------|------------------------|----------------------|
| M2 | Y | -6.0 | -6.0 | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |

BLC 3 Weight of Ice on Mast & Equipment

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | Y | -150.0 | 52.0 |
| M2 | Y | -97.0 | 52.0 |
| M2 | Y | 0.0 | 52.0 |
| M2 | Y | 0.0 | 52.0 |
| M2 | Y | -100.6 | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |
| M2 | Y | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Weight of Ice on Mast

Rows 2-7: Coax 1-6

Rows 8-13: Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | Y | -8.2 | -8.2 | 0.0 | 0.0 |
| M2 | Y | -14.8 | -14.8 | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M2 | Y | | | 23.0 | 52.0 |
| M4 | Y | -5.1 | -5.1 | 0.0 | 0.0 |
| M7 | Y | -5.1 | -5.1 | 0.0 | 0.0 |
| M9 | Y | -5.1 | -5.1 | 0.0 | 0.0 |
| M10 | Y | -5.1 | -5.1 | 0.0 | 0.0 |
| M4 | Y | | | 0.0 | 0.0 |
| M4 | Y | | | 0.0 | 0.0 |

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

Orlando

1801 Lee Rd, Suite 230

Winter Park, FL 32789

Phone 407.898.9039

100% Employee Owned

BLC 4 TIA_X-dir - Wind w/ Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 147.5 | 52.0 |
| M2 | X | 0.0 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | 676.9 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 37.5 | 37.5 | 0.0 | 0.0 |
| M2 | PX | 26.9 | 26.9 | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M4 | PX | 26.0 | 26.0 | 0.0 | 0.0 |
| M7 | PX | 26.0 | 26.0 | 0.0 | 0.0 |
| M9 | PX | 22.3 | 22.3 | 0.0 | 0.0 |
| M10 | PX | 22.3 | 22.3 | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |

BLC 5 TIA_X-dir - Wind w/o Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 138.4 | 52.0 |
| M2 | X | 0.0 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | 814.7 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |

Mount 1
Mount 2
Mount 3
Mount 4

Equipment 1
Equipment 2
Equipment 3
Equipment 4
Equipment 5
Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 45.9 | 45.9 | 0.0 | 0.0 |
| M2 | PX | 32.0 | 32.0 | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M4 | PX | 29.4 | 29.4 | 0.0 | 0.0 |
| M7 | PX | 29.4 | 29.4 | 0.0 | 0.0 |
| M9 | PX | 25.2 | 25.2 | 0.0 | 0.0 |
| M10 | PX | 25.2 | 25.2 | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |

BLC 6 TIA_Z-dir - Wind w/ Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | Z | 147.5 | 52.0 |
| M2 | Z | 0.0 | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | 676.9 | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PZ | 37.5 | 37.5 | 0.0 | 0.0 |
| M2 | PZ | 26.9 | 26.9 | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M4 | PZ | 26.0 | 26.0 | 0.0 | 0.0 |
| M7 | PZ | 26.0 | 26.0 | 0.0 | 0.0 |
| M9 | PZ | 22.3 | 22.3 | 0.0 | 0.0 |
| M10 | PZ | 22.3 | 22.3 | 0.0 | 0.0 |
| M4 | PZ | | | 0.0 | 0.0 |
| M4 | PZ | | | 0.0 | 0.0 |

BLC 7 TIA_Z-dir - Wind w/o Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | Z | 138.4 | 52.0 |
| M2 | Z | 0.0 | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | 814.7 | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |
| M2 | Z | | 52.0 |

Mount 1
Mount 2
Mount 3
Mount 4

Equipment 1
Equipment 2
Equipment 3
Equipment 4
Equipment 5
Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PZ | 45.9 | 45.9 | 0.0 | 0.0 |
| M2 | PZ | 32.0 | 32.0 | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M2 | PZ | | | 23.0 | 52.0 |
| M4 | PZ | 29.4 | 29.4 | 0.0 | 0.0 |
| M7 | PZ | 29.4 | 29.4 | 0.0 | 0.0 |
| M9 | PZ | 25.2 | 25.2 | 0.0 | 0.0 |
| M10 | PZ | 25.2 | 25.2 | 0.0 | 0.0 |
| M4 | PZ | | | 0.0 | 0.0 |
| M4 | PZ | | | 0.0 | 0.0 |

BLC 8 NESC 250B_X-dir - Wind w/ Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 27.0 | 52.0 |
| M2 | X | 0.0 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | 106.1 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 5.9 | 5.9 | 0.0 | 0.0 |
| M2 | PX | 4.8 | 4.8 | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M2 | PX | | | 23.0 | 52.0 |
| M4 | PX | 3.2 | 3.2 | 0.0 | 0.0 |
| M7 | PX | 3.2 | 3.2 | 0.0 | 0.0 |
| M9 | PX | 3.2 | 3.2 | 0.0 | 0.0 |
| M10 | PX | 3.2 | 3.2 | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |

BLC 9 NESC 250C_X-dir - Wind w/o Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 208.5 | 52.0 |
| M2 | X | 0.0 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | 1052.3 | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |
| M2 | X | | 52.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast Above Top of Tower

Row 2-7: Wind on Coax 1-6 Above Top of Tower

Row 8: Wind on Mast Below Top of Tower

Row 9-14: Wind on Coax 1-6 Below Top of Tower

Row 15-20: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 60.0 | 60.0 | 32.0 | 55.0 |
| M2 | PX | 46.6 | 46.6 | 32.0 | 52.0 |
| M2 | PX | | | 32.0 | 52.0 |
| M2 | PX | | | 32.0 | 52.0 |
| M2 | PX | | | 32.0 | 52.0 |
| M2 | PX | | | 32.0 | 52.0 |
| M2 | PX | | | 32.0 | 52.0 |
| M2 | PX | 48.0 | 48.0 | 0.0 | 32.0 |
| M2 | PX | 37.3 | 37.3 | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M2 | PX | | | 23.0 | 32.0 |
| M4 | PX | 27.8 | 27.8 | 0.0 | 0.0 |
| M7 | PX | 27.8 | 27.8 | 0.0 | 0.0 |
| M9 | PX | 27.8 | 27.8 | 0.0 | 0.0 |
| M10 | PX | 27.8 | 27.8 | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |
| M4 | PX | | | 0.0 | 0.0 |

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

Orlando

1801 Lee Rd, Suite 230

Winter Park, FL 32789

Phone 407.898.9039

100% Employee Owned

Equipment Loads (Tubular Pole on Lattice Structure) - North Mast - AT&T

Constants

| | |
|------------------------------|--|
| $h_{lattice} := 94 \cdot ft$ | height of lattice structure |
| $h_{mast} := 117 \cdot ft$ | Top of Mast AGL |
| $b_{mast} := 62 \cdot ft$ | Bot. of Mast AGL |
| $b_{coax} := 85 \cdot ft$ | Bot. of Coax AGL (on mast) |
| $z_{equip} := 104 \cdot ft$ | elevation of equip. |
| $z_{coax} := 90.5 \cdot ft$ | elevation to CL of coax section for TIA wind (linear appurtance) |
| $z_{pipe} := 90.5 \cdot ft$ | elevation to CL of pipe section for TIA wind |
| $r_{ice} := 0.5 \cdot in$ | Radial Ice, Tia & NESC |

TIA/EIA Wind

| | |
|-------------------|-------------------------------|
| $V_{tia} := 85$ | TIA Basic Wind Speed |
| $V_{i.tia} := 74$ | TIA Basic Wind Speed with Ice |

$$G_H := \begin{cases} \text{if } 0.65 + \left(\frac{0.60}{\left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}}} \right) \leq 1 \\ \quad \left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}} \\ \quad \parallel 1 \\ \text{also if } 0.65 + \left(\frac{0.60}{\left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}}} \right) \geq 1.25 \\ \quad \left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}} \\ \quad \parallel 1.25 \\ \text{else} \\ \quad \left(0.65 + \left(\frac{0.60}{\left(\frac{h_{lattice}}{33 \cdot ft} \right)^{\frac{1}{7}}} \right) \right) \end{cases}$$

$G_H = 1.167$ Calculated GRF, Sec. 2.3.4.1

$m_{grf.pole} := 1.25$ GRF Multiplier, Sec. 2.3.4.4

$G'_H := G_H \cdot m_{grf.pole} = 1.458$ Final GRF of pole on lattice, Sec. 2.3.4.4

NESC Shape Factors:

$Cd_R := 1.3$ $Cd_F := 1.6$ $Cd_{coax} := 1.45$

NESC Overload Factors:

| | |
|-----------------------|--------------------------|
| $OLF_{250B_V} := 1.5$ | 250B Vertical OLF |
| $OLF_{250B_T} := 2.5$ | 250B Transverse Wind OLF |
| $OLF_{250C_V} := 1.0$ | 250C Vertical OLF |
| $OLF_{250C_T} := 1.0$ | 250C Transverse Wind OLF |

$I_d := 57 \cdot pcf$ Ice Density

NESC Wind

| | |
|----------------------|---|
| $V_{nesc} := 110$ | NESC 250C 3 sec Gust Speed per OTRM 060 |
| $V_{i.nesc} := 39.5$ | NESC 250B 3 sec Gust Speed with Ice |

$I := 1.0$ NESC Importance Factor

$E_s := 0.346 \cdot \left(\frac{33}{\left(0.67 \cdot \frac{h_{mast}}{ft} \right)} \right)^{\frac{1}{7}} = 0.306$ NESC Factors, Table 250-3

$B_s := \frac{1}{\left(1 + \frac{0.56 \cdot \left(0.67 \cdot \frac{h_{mast}}{ft} \right)}{220} \right)} = 0.834$ NESC Factors, Table 250-3

$k_v := 1.43$ NESC Constant, Table 250-3

$G_{RF} := \frac{\left(1 + \left(2.7 \cdot E_s \cdot B_s^{0.5} \right) \right)}{k_v^2} = 0.858$ Calculated GRF, Table 250-3

$m_{grf} := 1.25$ NEU specified multiplier for 250C (OTRM 059.1, Attachment A)

$G'_{RF} := G_{RF} \cdot m_{grf} = 1.072$ Calculated GRF for 250C

TIA/EIA Exposure Coefficients:

$$Kz_{equip} := \left(\frac{z_{equip}}{33 \cdot ft} \right)^{\frac{2}{7}} = 1.388$$

$$Kz_{coax} := \left(\frac{z_{coax}}{33 \cdot ft} \right)^{\frac{2}{7}} = 1.334$$

Section Average Height Above Ground for Wind Load

$$Kz_{pipe} := \left(\frac{z_{pipe}}{33 \cdot ft} \right)^{\frac{2}{7}} = 1.334$$

Section Average Height Above Ground for Wind Load

NESC Exposure Coefficient:

$$k_z := 2.01 \cdot \left(\frac{h_{mast}}{900 \cdot ft} \right)^{\frac{2}{9.5}} = 1.308$$

Calculated k_z per Table 250-2

TIA/EIA Wind Pressure:

$$qz_{ice_{equip}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{equip} = 19.5 \text{ psf}$$

$$qz_{equip} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{equip} = 25.7 \text{ psf}$$

$$qz_{ice_{coax}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{coax} = 18.7 \text{ psf}$$

$$qz_{coax} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{coax} = 24.7 \text{ psf}$$

$$qz_{ice_{pipe}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{pipe} = 18.7 \text{ psf}$$

$$qz_{pipe} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{pipe} = 24.7 \text{ psf}$$

$$qz_{ice_{comp}} := 0.00256 \cdot psf \cdot V_{i.tia}^2 \cdot Kz_{pipe} = 18.7 \text{ psf}$$

$$qz_{comp} := 0.00256 \cdot psf \cdot V_{tia}^2 \cdot Kz_{pipe} = 24.7 \text{ psf}$$

NESC Wind Pressure:

$$qz_{250B} := 0.00256 \cdot V_{i.nesc}^2 \cdot I \cdot psf = 4.0 \text{ psf}$$

$$qz_{250C} := 0.00256 \cdot k_z \cdot V_{nesc}^2 \cdot I \cdot psf = 40.5 \text{ psf}$$

Pipe Extension Loads

Constants

$OD := 12.75 \cdot \text{in}$ outer diameter of pipe riser

$L_{\text{pipe}} := 55 \text{ ft}$ Length of pipe riser

$MemberLabel_{\text{pipe}} := \text{"M2"}$ Member Label in Risa

$$Weight_{ice_{\text{pipe}}} := I_d \cdot \frac{\pi}{4} \cdot ((OD + 2 \cdot r_{ice})^2 - OD^2) \cdot 0 = 0 \text{ plf}$$

$SA_{\text{pipe}} := OD = 1.063 \text{ ft}$ Projected Surface Area of Pipe

$SA_{ice_{\text{pipe}}} := OD + (2 \cdot r_{ice}) = 1.146 \text{ ft}$ Projected Surface Area of Pipe with Ice

TIA/EIA Wind:

$$Ar_{\text{pipe}} := \frac{L_{\text{pipe}}}{OD} = 51.765$$

$$Ca_{\text{pipe}} := \begin{cases} \text{if } Ar_{\text{pipe}} \leq 7 & 0.8 \\ \text{if } 7 < Ar_{\text{pipe}} < 25 & 0.8 + \frac{(Ar_{\text{pipe}} - 7) \cdot (1.2 - 0.8)}{(25 - 7)} \\ \text{if } Ar_{\text{pipe}} \geq 25 & 1.2 \end{cases} = 1.2 \quad \text{Table 1}$$

$$Wind.TIA_{\text{pipe}} := qz_{\text{pipe}} \cdot G'_H \cdot Ca_{\text{pipe}} \cdot SA_{\text{pipe}} \cdot 0 = 0 \text{ plf}$$

$$IceWind.TIA_{\text{pipe}} := qz_{ice_{\text{pipe}}} \cdot G'_H \cdot Ca_{\text{pipe}} \cdot SA_{ice_{\text{pipe}}} \cdot 0 = 0 \text{ plf}$$

NESC Wind:

$$Wind.250B_{\text{pipe}} := qz_{250B} \cdot Cd_R \cdot SA_{ice_{\text{pipe}}} \cdot 0 = 0.0 \text{ plf}$$

Wind Pressure Above Top of Tower:

$$Wind.250C_{\text{pipe.Above}} := qz_{250C} \cdot G'_{RF} \cdot Cd_R \cdot SA_{\text{pipe}} \cdot 0 = 0.0 \text{ plf}$$

Wind Pressure Below Top of Tower:

$$Wind.250C_{\text{pipe.Below}} := qz_{250C} \cdot G'_{RF} \cdot Cd_R \cdot SA_{\text{pipe}} \cdot 0 = 0.0 \text{ plf}$$

Mast Component Loads - NOT USED

Component Description

$a := 1 \dots 1$ <----- input number of component slots used

| | | | | | |
|-------------|-----------------------|----------------------------|----------------------------|------------------------|-----------------------------|
| 1. Not Used | $Cd_{comp_1} := Cd_F$ | $W_{comp_1} := 0 \cdot in$ | $H_{comp_1} := 0 \cdot in$ | $L_{comp_1} := 0 \ ft$ | $MemLabel_{comp_1} := "NA"$ |
| 2. Not Used | $Cd_{comp_2} := Cd_F$ | $W_{comp_2} := 0 \cdot in$ | $H_{comp_2} := 0 \cdot in$ | $L_{comp_2} := 0 \ ft$ | $MemLabel_{comp_2} := "NA"$ |
| 3. Not Used | $Cd_{comp_3} := Cd_F$ | $W_{comp_3} := 0 \cdot in$ | $H_{comp_3} := 0 \cdot in$ | $L_{comp_3} := 0 \ ft$ | $MemLabel_{comp_3} := "NA"$ |
| 4. Not Used | $Cd_{comp_4} := Cd_F$ | $W_{comp_4} := 0 \cdot in$ | $H_{comp_4} := 0 \cdot in$ | $L_{comp_4} := 0 \ ft$ | $MemLabel_{comp_4} := "NA"$ |
| 5. Not Used | $Cd_{comp_5} := Cd_F$ | $W_{comp_5} := 0 \cdot in$ | $H_{comp_5} := 0 \cdot in$ | $L_{comp_5} := 0 \ ft$ | $MemLabel_{comp_5} := "NA"$ |
| 6. Not Used | $Cd_{comp_6} := Cd_F$ | $W_{comp_6} := 0 \cdot in$ | $H_{comp_6} := 0 \cdot in$ | $L_{comp_6} := 0 \ ft$ | $MemLabel_{comp_6} := "NA"$ |

$$Weight_{ice_{comp_a}} := I_d \cdot \left((W_{comp_a} + 2 \cdot r_{ice}) \cdot (H_{comp_a} + 2 \cdot r_{ice}) - W_{comp_a} \cdot H_{comp_a} \right) \cdot 0 = [0] \ plf$$

$$SA_{comp_a} := \max(W_{comp_a}, H_{comp_a}) = [0] \ ft$$

$$SA_{ice_{comp_a}} := \max(W_{comp_a}, H_{comp_a}) + 2 \cdot r_{ice} = [0.1] \ ft$$

$$Ar_{comp_a} := 0 = [0]$$

$$Ca_{comp_a} := \begin{cases} 1.4 & \text{if } Ar_{comp_a} \leq 7 \\ 1.4 + \frac{(Ar_{comp_a} - 7) \cdot (2.0 - 1.4)}{(25 - 7)} & \text{if } 7 < Ar_{comp_a} < 25 \\ 2.0 & \text{if } Ar_{comp_a} \geq 25 \end{cases} = [1.4]$$

TIA/EIA-222-F,
Table 3

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

www.PaulJFord.com

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

TIA/EIA Wind:

$$IceWind.TIA_{comp_a} := qz_{ice_{comp}} \cdot G'_H \cdot Ca_{comp_a} \cdot SA_{ice_{comp_a}} \cdot 0 = [0.0] \text{ plf}$$

$$Wind.TIA_{comp_a} := qz_{comp} \cdot G'_H \cdot Ca_{comp_a} \cdot SA_{comp_a} = [0.0] \text{ plf}$$

NESC Wind:

$$Wind.250B_{comp_a} := qz_{250B} \cdot Cd_{comp_a} \cdot \max(W_{comp_a}, H_{comp_a}) = [0.0] \text{ plf}$$

$$Wind.250C_{comp_a} := qz_{250C} \cdot G_{RF} \cdot Cd_{comp_a} \cdot \max(W_{comp_a}, H_{comp_a}) = [0.0] \text{ plf}$$

Mount Load

$b := 1..2$ <----- input number of mount slots used

| 1. Microflect Tri-Sector Mount | | | | TIA/EIA-222-F Table 3 | NESC Shape Factor |
|---------------------------------|-------------------------------------|--------------------------------|-----------------------------------|--------------------------|------------------------|
| $A_{mount_1} := 3.0 \cdot ft^2$ | $Aice_{mount_1} := 4.22 \cdot ft^2$ | $WT_{mount_1} := 101 \cdot lb$ | $WTice_{mount_1} := 150 \cdot lb$ | $Ca_{mount_1} := 1.2$ | $Cd_{mount_1} := Cd_F$ |
| 2. (3) 2.375" OD Pipe Mounts | | | | | |
| $A_{mount_2} := 0 \cdot ft^2$ | $Aice_{mount_2} := 0 \cdot ft^2$ | $WT_{mount_2} := 66 \cdot lb$ | $WTice_{mount_2} := 97 \cdot lb$ | $Ca_{mount_2} := 1.2$ | $Cd_{mount_2} := Cd_F$ |
| 3. Not Used | | | | | |
| $A_{mount_3} := 0 \cdot ft^2$ | $Aice_{mount_3} := 0 \cdot ft^2$ | $WT_{mount_3} := 0 \cdot lb$ | $WTice_{mount_3} := 0 \cdot lb$ | $Ca_{mount_3} := 1.2$ | $Cd_{mount_3} := Cd_F$ |
| 4. Not Used | | | | | |
| $A_{mount_4} := 0 \cdot ft^2$ | $Aice_{mount_4} := 0 \cdot ft^2$ | $WT_{mount_4} := 0 \cdot lb$ | $WTice_{mount_4} := 0 \cdot lb$ | $Ca_{mount_4} := 1.2$ | $Cd_{mount_4} := Cd_F$ |

TIA/EIA Wind:

$$IceWind.TIA_{mount_b} := qz_{ice_{equip}} \cdot G'_H \cdot Ca_{mount_b} \cdot Aice_{mount_b} = \begin{bmatrix} 143.7 \\ 0.0 \end{bmatrix} lbf$$

$$Wind.TIA_{mount_b} := qz_{equip} \cdot G'_H \cdot Ca_{mount_b} \cdot A_{mount_b} = \begin{bmatrix} 134.8 \\ 0.0 \end{bmatrix} lbf$$

NESC Wind:

$$Wind.250B_{mount_b} := qz_{250B} \cdot Cd_{mount_b} \cdot Aice_{mount_b} = \begin{bmatrix} 27.0 \\ 0.0 \end{bmatrix} lbf$$

$$Wind.250C_{mount_b} := qz_{250C} \cdot G'_{RF} \cdot Cd_{mount_b} \cdot A_{mount_b} = \begin{bmatrix} 208.5 \\ 0.0 \end{bmatrix} lbf$$

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

Equipment Loads

Equipment Description

$i := 1..2$ <----- input number of equip slots used

| | | | | | |
|---------------------|-------------------|----------------------------|----------------------------|----------------------------|-----------------------------|
| 1. Powerwave 7770 | $QTY_{eq_1} := 3$ | $L_{eq_1} := 55 \cdot in$ | $W_{eq_1} := 11 \cdot in$ | $t_{eq_1} := 5 \cdot in$ | $WT_{eq_1} := 35 \cdot lbf$ |
| 2. TT19-08BP111-001 | $QTY_{eq_2} := 3$ | $L_{eq_2} := 9.9 \cdot in$ | $W_{eq_2} := 6.7 \cdot in$ | $t_{eq_2} := 5.4 \cdot in$ | $WT_{eq_2} := 16 \cdot lbf$ |
| 3. Not Used | $QTY_{eq_3} := 0$ | $L_{eq_3} := 0 \cdot in$ | $W_{eq_3} := 0 \cdot in$ | $t_{eq_3} := 0 \cdot in$ | $WT_{eq_3} := 0 \cdot lbf$ |
| 4. Not Used | $QTY_{eq_4} := 0$ | $L_{eq_4} := 0 \cdot in$ | $W_{eq_4} := 0 \cdot in$ | $t_{eq_4} := 0 \cdot in$ | $WT_{eq_4} := 0 \cdot lbf$ |
| 5. Not Used | $QTY_{eq_5} := 0$ | $L_{eq_5} := 0 \cdot in$ | $W_{eq_5} := 0 \cdot in$ | $t_{eq_5} := 0 \cdot in$ | $WT_{eq_5} := 0 \cdot lbf$ |
| 6. Not Used | $QTY_{eq_6} := 0$ | $L_{eq_6} := 0 \cdot in$ | $W_{eq_6} := 0 \cdot in$ | $t_{eq_6} := 0 \cdot in$ | $WT_{eq_6} := 0 \cdot lbf$ |

$$Weight_{equip_i} := WT_{eq_i} \cdot QTY_{eq_i} = \begin{bmatrix} 105.0 \\ 48.0 \end{bmatrix} lbf$$

$$Weight.Ice_{equip_i} := I_d \cdot QTY_{eq_i} \cdot \left((L_{eq_i} + 2 \cdot r_{ice}) \cdot (W_{eq_i} + 2 \cdot r_{ice}) \cdot (t_{eq_i} + 2 \cdot r_{ice}) - L_{eq_i} \cdot W_{eq_i} \cdot t_{eq_i} \right) = \begin{bmatrix} 99.7 \\ 17.7 \end{bmatrix} lbf$$

$$SA_{eq_i} := L_{eq_i} \cdot W_{eq_i} = \begin{bmatrix} 4.2 \\ 0.5 \end{bmatrix} ft^2$$

$$A_{eq_i} := SA_{eq_i} \cdot QTY_{eq_i} = \begin{bmatrix} 12.6 \\ 1.4 \end{bmatrix} ft^2$$

$$SAice_{eq_i} := (L_{eq_i} + 2 \cdot r_{ice}) \cdot (W_{eq_i} + 2 \cdot r_{ice}) = \begin{bmatrix} 4.7 \\ 0.6 \end{bmatrix} ft^2$$

$$Aice_{eq_i} := SAice_{eq_i} \cdot QTY_{eq_i} = \begin{bmatrix} 14.0 \\ 1.7 \end{bmatrix} ft^2$$

$$Ar_{eq_i} := \frac{L_{eq_i}}{W_{eq_i}} = \begin{bmatrix} 5.0 \\ 1.5 \end{bmatrix}$$

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

$$C_{a_{eq_i}} := \begin{cases} \text{if } Ar_{eq_i} \leq 7 \\ \quad \parallel 1.4 \\ \text{if } 7 < Ar_{eq_i} < 25 \\ \quad \parallel 1.4 + \frac{(Ar_{eq_i} - 7) \cdot (2.0 - 1.4)}{(25 - 7)} \\ \text{if } Ar_{eq_i} \geq 25 \\ \quad \parallel 2.0 \end{cases} = \begin{bmatrix} 1.4 \\ 1.4 \end{bmatrix} \quad \text{TIA/EIA-222-F, Table 3}$$

TIA/EIA Wind:

$$IceWind.TIA_{equip_i} := qz_{ice_{equip}} \cdot G'_H \cdot C_{a_{eq_i}} \cdot A_{ice_{eq_i}} = \begin{bmatrix} 556.2 \\ 69.5 \end{bmatrix} \text{ lbf}$$

$$Wind.TIA_{equip_i} := qz_{equip} \cdot G'_H \cdot C_{a_{eq_i}} \cdot A_{eq_i} = \begin{bmatrix} 660.7 \\ 72.4 \end{bmatrix} \text{ lbf}$$

NESC Wind:

$$Wind.250B_{equip_i} := qz_{250B} \cdot C_{d_F} \cdot A_{ice_{eq_i}} = \begin{bmatrix} 89.5 \\ 11.2 \end{bmatrix} \text{ lbf}$$

$$Wind.250C_{equip_i} := qz_{250C} \cdot G'_{RF} \cdot C_{d_F} \cdot A_{eq_i} = \begin{bmatrix} 876.1 \\ 96.0 \end{bmatrix} \text{ lbf}$$

Coax Loads - Northwest Leg

Coax Cable Description

$k := 1 .. 1$ <----- input number of coax cable slots used

| Coax Cable Description | QTY_{coax_k} | NP_{coax_k} | OD_{coax_k} | WT_{coax_k} | L_{coax_k} |
|------------------------|---------------------|--------------------|--------------------------------|---------------------------------|-----------------------------|
| 1. Heliax 1-1/4"Ø | $QTY_{coax_1} := 6$ | $NP_{coax_1} := 3$ | $OD_{coax_1} := 1.48 \cdot in$ | $WT_{coax_1} := 0.50 \cdot plf$ | $L_{coax_1} := 20 \cdot ft$ |
| 2. Not Used | $QTY_{coax_2} := 0$ | $NP_{coax_2} := 0$ | $OD_{coax_2} := 0 \cdot in$ | $WT_{coax_2} := 0 \cdot plf$ | $L_{coax_2} := 0 \cdot ft$ |
| 3. Not Used | $QTY_{coax_3} := 0$ | $NP_{coax_3} := 0$ | $OD_{coax_3} := 0 \cdot in$ | $WT_{coax_3} := 0 \cdot plf$ | $L_{coax_3} := 0 \cdot ft$ |
| 4. Not Used | $QTY_{coax_4} := 0$ | $NP_{coax_4} := 0$ | $OD_{coax_4} := 0 \cdot in$ | $WT_{coax_4} := 0 \cdot plf$ | $L_{coax_4} := 0 \cdot ft$ |
| 5. Not Used | $QTY_{coax_5} := 0$ | $NP_{coax_5} := 0$ | $OD_{coax_5} := 0 \cdot in$ | $WT_{coax_5} := 0 \cdot plf$ | $L_{coax_5} := 0 \cdot ft$ |
| 6. Not Used | $QTY_{coax_6} := 0$ | $NP_{coax_6} := 0$ | $OD_{coax_6} := 0 \cdot in$ | $WT_{coax_6} := 0 \cdot plf$ | $L_{coax_6} := 0 \cdot ft$ |

$$coaxspan := \begin{bmatrix} 29 \\ 13 \\ 15 \\ 15 \\ 12.5 \end{bmatrix} \cdot ft$$

Input coax vertical span between attachment joints for PLS Loads

$$SA_{coax_k} := NP_{coax_k} \cdot OD_{coax_k} = [0.4] ft$$

$$SA_{ice_{coax_k}} := \begin{cases} SA_{coax_k} & \text{if } NP_{coax_k} \neq 0 \\ 0 & \text{else} \\ \left((NP_{coax_k} \cdot OD_{coax_k}) + (2 \cdot r_{ice}) \right) & \end{cases} = [0.5] ft$$

$$Weight_{coax_k} := WT_{coax_k} \cdot QTY_{coax_k} = [3.0] plf$$

$$Weight_{Ice_{coax_k}} := \left(\frac{\pi}{4} \cdot \left((OD_{coax_k} + 2 \cdot r_{ice})^2 - OD_{coax_k}^2 \right) \cdot QTY_{coax_k} \cdot I_d \right) = [7.4] plf$$

Columbus

250 E Broad St, Suite 600
Columbus, OH 43215
Phone 614.221.6679
Founded in 1965

Orlando

1801 Lee Rd, Suite 230
Winter Park, FL 32789
Phone 407.898.9039
100% Employee Owned

$$Ar_{coax_k} := \frac{L_{coax_k}}{OD_{coax_k}} = [162.2] \quad \text{Aspect Ratio of Coax}$$

$$Ca_{coax_k} := \begin{cases} \text{if } Ar_{coax_k} \leq 7 \\ \quad || \quad 0.8 \\ \text{if } 7 < Ar_{coax_k} < 25 \\ \quad || \quad 0.8 + \frac{(Ar_{coax_k} - 7) \cdot (2.0 - 1.4)}{(25 - 7)} \\ \text{if } Ar_{coax_k} \geq 25 \\ \quad || \quad 1.2 \end{cases} = [1.2] \quad \text{TIA/EIA-222-F, Table 3}$$

TIA/EIA Wind:

$$IceWind.TIA_{coax_k} := qz_{ice_{coax}} \cdot G'_H \cdot Ca_{coax_k} \cdot SA_{ice_{coax_k}} = [14.8] \text{ plf}$$

$$Wind.TIA_{coax_k} := qz_{coax} \cdot G'_H \cdot Ca_{coax_k} \cdot SA_{coax_k} = [16.0] \text{ plf}$$

NESC Wind for Coax on Pipe Mast Risa Model:

$$Wind.250B_{coax.pipe_k} := qz_{250B} \cdot Cd_{coax} \cdot SA_{ice_{coax}_k} = [2.6] \text{ plf}$$

$$Wind.250C_{coax.pipe.Above_k} := qz_{250C} \cdot G'_{RF} \cdot Cd_{coax} \cdot SA_{coax}_k = [23.3] \text{ plf}$$

$$Wind.250C_{coax.pipe.Below_k} := qz_{250C} \cdot G_{RF} \cdot Cd_{coax} \cdot SA_{coax}_k = [18.6] \text{ plf}$$

NESC Loads For PLS Model:

$$Weight.250B_{coax.twr} := \left(\sum Weight_{coax} + \sum Weight.Ice_{coax} \right) \cdot coaxspan \cdot OLF250B_V$$

$$Wind.250B_{coax.twr} := qz_{250B} \cdot Cd_{coax} \cdot \left(\sum SA_{ice_{coax}} \right) \cdot coaxspan \cdot OLF250B_T$$

$$Weight.250C_{coax.twr} := \left(\sum Weight_{coax} \right) \cdot coaxspan \cdot OLF250C_V$$

$$Wind.250C_{coax.twr} := qz_{250C} \cdot G_{RF} \cdot Cd_{coax} \cdot \left(\sum SA_{coax} \right) \cdot coaxspan \cdot OLF250C_T$$

Summary of Loads - PLS Coax Load Inputs

NESC 250B_X-dir - Wind w/ Ice

| Joint Label | Vertical Load (lbs) | Transverse Load (lbs) | Longitudinal Load (lbs) | Load Comment |
|-------------|---------------------|-----------------------|-------------------------|--------------|
| C1X | 452 | 190 | 0 | Coax Load |
| C2X | 203 | 85 | 0 | Coax Load |
| C3X | 234 | 98 | 0 | Coax Load |
| C4X | 234 | 98 | 0 | Coax Load |
| C5X | 195 | 82 | 0 | Coax Load |

NESC 250C_X-dir - Wind w/o Ice

| Joint Label | Vertical Load (lbs) | Transverse Load (lbs) | Longitudinal Load (lbs) | Load Comment |
|-------------|---------------------|-----------------------|-------------------------|--------------|
| C1X | 87 | 541 | 0 | Coax Load |
| C2X | 39 | 242 | 0 | Coax Load |
| C3X | 45 | 280 | 0 | Coax Load |
| C4X | 45 | 280 | 0 | Coax Load |
| C5X | 38 | 233 | 0 | Coax Load |

Summary of Loads - Risa Loads Inputs

BLC 2 Weight of Equipment

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft, %] |
|--------------|-----------|---------------------|------------------|
| M2 | Y | -101.0 | 42.0 |
| M2 | Y | -66.0 | 42.0 |
| M2 | Y | 0.0 | 42.0 |
| M2 | Y | 0.0 | 42.0 |
| M2 | Y | -105.0 | 42.0 |
| M2 | Y | -48.0 | 42.0 |
| M2 | Y | | 42.0 |
| M2 | Y | | 42.0 |
| M2 | Y | | 42.0 |
| M2 | Y | | 42.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads - Rows 1-6: Coax 1-6 Weight

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft, %] | End Location [ft, %] |
|--------------|-----------|-------------------------|-----------------------|------------------------|----------------------|
| M2 | Y | -3.0 | -3.0 | 23.0 | 42.0 |
| M2 | Y | 0.0 | 0.0 | 23.0 | 42.0 |
| M2 | Y | 0.0 | 0.0 | 23.0 | 42.0 |
| M2 | Y | 0.0 | 0.0 | 23.0 | 42.0 |
| M2 | Y | 0.0 | 0.0 | 23.0 | 42.0 |
| M2 | Y | 0.0 | 0.0 | 23.0 | 42.0 |

BLC 3 Weight of Ice on Mast & Equipment

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | Y | -150.0 | 42.0 |
| M2 | Y | -97.0 | 42.0 |
| M2 | Y | 0.0 | 42.0 |
| M2 | Y | 0.0 | 42.0 |
| M2 | Y | -99.7 | 42.0 |
| M2 | Y | -17.7 | 42.0 |
| M2 | Y | | 42.0 |
| M2 | Y | | 42.0 |
| M2 | Y | | 42.0 |
| M2 | Y | | 42.0 |
| M2 | Y | | 42.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Weight of Ice on Mast

Rows 2-7: Coax 1-6

Rows 8-13: Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | Y | 0.0 | 0.0 | 0.0 | 0.0 |
| M2 | Y | -7.4 | -7.4 | 23.0 | 42.0 |
| M2 | Y | | | 23.0 | 42.0 |
| M2 | Y | | | 23.0 | 42.0 |
| M2 | Y | | | 23.0 | 42.0 |
| M2 | Y | | | 23.0 | 42.0 |
| M2 | Y | | | 23.0 | 42.0 |
| NA | Y | 0.0 | 0.0 | 0.0 | 0.0 |
| NA | Y | | | 0.0 | 0.0 |
| NA | Y | | | 0.0 | 0.0 |
| NA | Y | | | 0.0 | 0.0 |
| NA | Y | | | 0.0 | 0.0 |
| NA | Y | | | 0.0 | 0.0 |

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

Orlando

1801 Lee Rd, Suite 230

Winter Park, FL 32789

Phone 407.898.9039

100% Employee Owned

BLC 4 TIA_X-dir - Wind w/ Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 143.7 | 42.0 |
| M2 | X | 0.0 | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | 556.2 | 42.0 |
| M2 | X | 69.5 | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 0.0 | 0.0 | 0.0 | 0.0 |
| M2 | PX | 14.8 | 14.8 | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| NA | PX | 0.0 | 0.0 | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

Orlando

1801 Lee Rd, Suite 230

Winter Park, FL 32789

Phone 407.898.9039

100% Employee Owned

BLC 5 TIA_X-dir - Wind w/o Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 134.8 | 42.0 |
| M2 | X | 0.0 | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | 660.7 | 42.0 |
| M2 | X | 72.4 | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 0.0 | 0.0 | 0.0 | 0.0 |
| M2 | PX | 16.0 | 16.0 | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| NA | PX | 0.0 | 0.0 | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |

BLC 6 TIA_Z-dir - Wind w/ Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | Z | 143.7 | 42.0 |
| M2 | Z | 0.0 | 42.0 |
| M2 | Z | | 42.0 |
| M2 | Z | | 42.0 |
| M2 | Z | 556.2 | 42.0 |
| M2 | Z | 69.5 | 42.0 |
| M2 | Z | | 42.0 |
| M2 | Z | | 42.0 |
| M2 | Z | | 42.0 |
| M2 | Z | | 42.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PZ | 0.0 | 0.0 | 0.0 | 0.0 |
| M2 | PZ | 14.8 | 14.8 | 23.0 | 42.0 |
| M2 | PZ | | | 23.0 | 42.0 |
| M2 | PZ | | | 23.0 | 42.0 |
| M2 | PZ | | | 23.0 | 42.0 |
| M2 | PZ | | | 23.0 | 42.0 |
| M2 | PZ | | | 23.0 | 42.0 |
| NA | PZ | 0.0 | 0.0 | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |

BLC 7 TIA_Z-dir - Wind w/o Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | Z | 134.8 | 42.0 |
| M2 | Z | 0.0 | 42.0 |
| M2 | Z | | 42.0 |
| M2 | Z | | 42.0 |
| M2 | Z | 660.7 | 42.0 |
| M2 | Z | 72.4 | 42.0 |
| M2 | Z | | 42.0 |
| M2 | Z | | 42.0 |
| M2 | Z | | 42.0 |
| M2 | Z | | 42.0 |
| M2 | Z | | 42.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PZ | 0.0 | 0.0 | 0.0 | 0.0 |
| M2 | PZ | 16.0 | 16.0 | 23.0 | 42.0 |
| M2 | PZ | | | 23.0 | 42.0 |
| M2 | PZ | | | 23.0 | 42.0 |
| M2 | PZ | | | 23.0 | 42.0 |
| M2 | PZ | | | 23.0 | 42.0 |
| M2 | PZ | | | 23.0 | 42.0 |
| NA | PZ | 0.0 | 0.0 | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |
| NA | PZ | | | 0.0 | 0.0 |

BLC 8 NESC 250B_X-dir - Wind w/ Ice

Member Point Loads

| Member Label | Direction | Magnitude [lb,k-ft] | Location [ft,%] |
|--------------|-----------|---------------------|-----------------|
| M2 | X | 27.0 | 42.0 |
| M2 | X | 0.0 | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | 89.5 | 42.0 |
| M2 | X | 11.2 | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |
| M2 | X | | 42.0 |

Mount 1

Mount 2

Mount 3

Mount 4

Equipment 1

Equipment 2

Equipment 3

Equipment 4

Equipment 5

Equipment 6

Member Distributed Loads

Row 1: Wind on Mast

Rows 2-7: Wind on Coax 1-6

Rows 8-13: Wind on Mast Components 1-6

| Member Label | Direction | Start Magnitude [lb/ft] | End Magnitude [lb/ft] | Start Location [ft,%] | End Location [ft,%] |
|--------------|-----------|-------------------------|-----------------------|-----------------------|---------------------|
| M2 | PX | 0.0 | 0.0 | 0.0 | 0.0 |
| M2 | PX | 2.6 | 2.6 | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| M2 | PX | | | 23.0 | 42.0 |
| NA | PX | 0.0 | 0.0 | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |
| NA | PX | | | 0.0 | 0.0 |

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

Orlando

1801 Lee Rd, Suite 230


Winter Park, FL 32789

Phone 407.898.9039

100% Employee Owned

APPENDIX C

COMPUTER OUTPUT

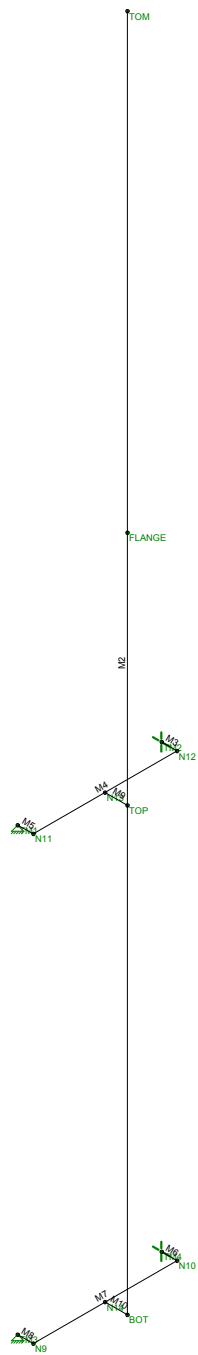

Envelope Only Solution


| |
|-------------------------|
| Paul J Ford and Company |
| CBH |
| 31216-0025.001.6090 |

| |
|---------------------------------------|
| South Mast on Eversource Tower # 1102 |
|---------------------------------------|

| |
|------------------------------------|
| M - 1 |
| Aug 8, 2016 at 8:59 AM |
| 31216-0025.001.6090 - South Mas... |



| Code Check (Elem) | |
|-------------------|---------|
| ■ | No Calc |
| ■ | > 1.0 |
| ■ | 50-1.0 |
| ■ | 75-90 |
| ■ | 50-75 |
| ■ | 0-.50 |

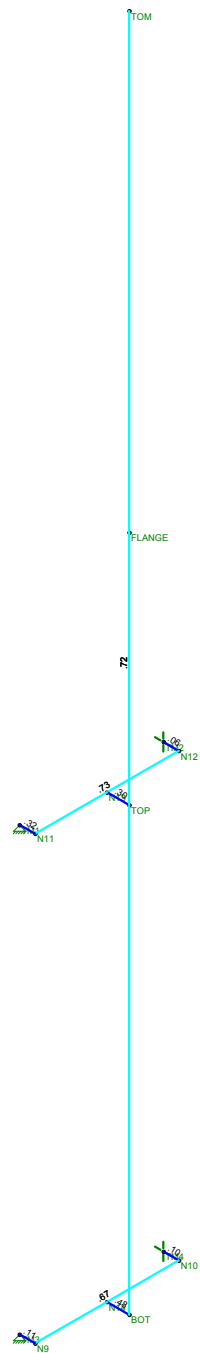

Member Code Checks Displayed (Enveloped)
Envelope Only Solution

| | | |
|-------------------------|---------------------------------------|------------------------------------|
| Paul J Ford and Company | South Mast on Eversource Tower # 1102 | M - 2 |
| CBH | | Aug 8, 2016 at 8:59 AM |
| 31216-0025.001.6090 | | 31216-0025.001.6090 - South Mas... |



(Global) Model Settings

| | |
|--|--------------------|
| Display Sections for Member Calcs | 5 |
| Max Internal Sections for Member Calcs | 97 |
| Include Shear Deformation? | Yes |
| Increase Nailing Capacity for Wind? | Yes |
| Include Warping? | Yes |
| Trans Load Btwn Intersecting Wood Wall? | Yes |
| Area Load Mesh (in^2) | 144 |
| Merge Tolerance (in) | .12 |
| P-Delta Analysis Tolerance | 0.50% |
| Include P-Delta for Walls? | Yes |
| Automatically Iterate Stiffness for Walls? | No |
| Max Iterations for Wall Stiffness | 3 |
| Gravity Acceleration (ft/sec^2) | 32.2 |
| Wall Mesh Size (in) | 12 |
| Eigensolution Convergence Tol. (1.E-) | 4 |
| Vertical Axis | Y |
| Global Member Orientation Plane | XZ |
| Static Solver | Sparse Accelerated |
| Dynamic Solver | Standard Solver |

| | |
|------------------------|-----------------|
| Hot Rolled Steel Code | AISC 9th: ASD |
| RISAConnection Code | None |
| Cold Formed Steel Code | None |
| Wood Code | None |
| Wood Temperature | < 100F |
| Concrete Code | None |
| Masonry Code | None |
| Aluminum Code | None - Building |

| | |
|-------------------------------|--------------------|
| Number of Shear Regions | 4 |
| Region Spacing Increment (in) | 4 |
| Biaxial Column Method | PCA Load Contour |
| Parme Beta Factor (PCA) | .65 |
| Concrete Stress Block | Rectangular |
| Use Cracked Sections? | Yes |
| Use Cracked Sections Slab? | Yes |
| Bad Framing Warnings? | No |
| Unused Force Warnings? | Yes |
| Min 1 Bar Diam. Spacing? | No |
| Concrete Rebar Set | REBAR_SET_ASTMA615 |
| Min % Steel for Column | 1 |
| Max % Steel for Column | 8 |



(Global) Model Settings, Continued

| | |
|-----------------------------|-------------|
| Seismic Code | UBC 1997 |
| Seismic Base Elevation (ft) | Not Entered |
| Add Base Weight? | No |
| Ct X | .035 |
| Ct Z | .035 |
| T X (sec) | Not Entered |
| T Z (sec) | Not Entered |
| R X | 8.5 |
| R Z | 8.5 |
| Ca | .36 |
| Cv | .54 |
| Nv | 1 |
| Occupancy Category | 4 |
| Seismic Zone | 3 |
| Om Z | 1 |
| Om X | 1 |
| Rho Z | 1 |
| Rho X | 1 |

Joint Coordinates and Temperatures

| | Label | X [ft] | Y [ft] | Z [ft] | Temp [F] | Detach From Diaphragm |
|----|--------|--------|--------|--------|----------|-----------------------|
| 1 | BOT | 1.833 | 0 | -0. | 0 | |
| 2 | TOP | 1.833 | 21.5 | -0. | 0 | |
| 3 | FLANGE | 1.833 | 33 | -0. | 0 | |
| 4 | TOM | 1.833 | 55 | -0. | 0 | |
| 5 | TM3 | 0. | 0 | 3.5 | 0 | |
| 6 | TM4 | 0 | 0 | -3.5 | 0 | |
| 7 | TM1 | 0. | 21.5 | 3.5 | 0 | |
| 8 | TM2 | 0 | 21.5 | -3.5 | 0 | |
| 9 | N9 | .75 | 0 | 3.5 | 0 | |
| 10 | N10 | .75 | 0 | -3.5 | 0 | |
| 11 | N11 | .75 | 21.5 | 3.5 | 0 | |
| 12 | N12 | .75 | 21.5 | -3.5 | 0 | |
| 13 | N13 | .75 | 21.5 | -0. | 0 | |
| 14 | N14 | .75 | 0 | -0. | 0 | |

Hot Rolled Steel Properties

| | Label | E [ksi] | G [ksi] | Nu | Therm (\1E5 F) | Density[k/ft^3] | Yield[ksi] | Ry | Fu[ksi] | Rt |
|---|-----------------|---------|---------|----|----------------|-----------------|------------|-----|---------|-----|
| 1 | A572 Gr.50 | 29000 | 11154 | .3 | .65 | .49 | 50 | 1.1 | 65 | 1.2 |
| 2 | A992 | 29000 | 11154 | .3 | .65 | .49 | 50 | 1.1 | 65 | 1.2 |
| 3 | A500 Gr.B (42) | 29000 | 11154 | .3 | .65 | .49 | 42 | 1.3 | 58 | 1.1 |
| 4 | A500 Gr. B (46) | 29000 | 11154 | .3 | .65 | .49 | 46 | 1.5 | 58 | 1.2 |
| 5 | A500 Gr. C (46) | 29000 | 11154 | .3 | .65 | .49 | 46 | 1.5 | 62 | 1.2 |
| 6 | A500 Gr. C (50) | 29000 | 11154 | .3 | .65 | .49 | 50 | 1.5 | 62 | 1.2 |
| 7 | A53 Gr. B | 29000 | 11154 | .3 | .65 | .49 | 35 | 1.5 | 60 | 1.2 |
| 8 | A36 | 29000 | 11154 | .3 | .65 | .49 | 36 | 1.5 | 58 | 1.2 |

Hot Rolled Steel Section Sets

| | Label | Shape | Type | Design List | Material | Design Ru... | A [in2] | Iyy [in4] | Izz [in4] | J [in4] |
|---|-------|------------|------|-------------|-----------------|--------------|---------|-----------|-----------|---------|
| 1 | MAST | PIPE 12.0X | Beam | Pipe | A53 Gr. B | Typical | 17.5 | 339 | 339 | 678 |
| 2 | Brace | HSS6x6x4 | Beam | Tube | A500 Gr. B (46) | Typical | 5.24 | 28.6 | 28.6 | 45.6 |



Member Primary Data

| | Label | I Joint | J Joint | K Joint | Rotate(deg) | Section/Shape | Type | Design List | Material | Design Rules |
|---|-------|---------|---------|---------|-------------|---------------|------|-------------|-----------------|--------------|
| 1 | M2 | BOT | TOM | | | MAST | Beam | Pipe | A53 Gr. B | Typical |
| 2 | M3 | TM2 | N12 | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 3 | M4 | N12 | N11 | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 4 | M5 | N11 | TM1 | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 5 | M6 | TM4 | N10 | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 6 | M7 | N10 | N9 | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 7 | M8 | N9 | TM3 | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 8 | M9 | N13 | TOP | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 9 | M10 | N14 | BOT | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |

Basic Load Cases

| | BLC Description | Category | X Gravity | Y Gravity | Z Gravity | Joint | Point | Distribut. | Area(Member) | Surface(P... |
|---|----------------------------------|----------|-----------|-----------|-----------|-------|-------|------------|--------------|--------------|
| 1 | Self Weight (Mast Members) | None | | -1.07 | | | | | | |
| 2 | Weight of Equipment | None | | | | | 20 | 12 | | |
| 3 | Weight of Ice on Mast and Equip. | None | | | | | 20 | 15 | | |
| 4 | TIA_X-dir - Wind w/ Ice | None | | | | | 20 | 15 | | |
| 5 | TIA_X-dir - Wind w/o Ice | None | | | | | 20 | 15 | | |
| 6 | TIA_Z-dir - Wind w/ Ice | None | | | | | 20 | 15 | | |
| 7 | TIA_Z-dir - Wind w/o Ice | None | | | | | 20 | 15 | | |
| 8 | NESC 250B_X-dir - Wind w/ Ice | None | | | | | 20 | 15 | | |
| 9 | NESC 250C_X-dir - Wind w/o Ice | None | | | | | 20 | 29 | | |

Load Combinations

| | Description | Solve P | Delta | S... | BLC Factor | BLC Factor | BLC Factor | BLC Factor | ... | F..... | F..... | F..... | F..... | F..... | F..... |
|---|--------------------------|---------|-------|------|------------|------------|------------|------------|-----|--------|--------|--------|--------|--------|--------|
| 1 | TIA_X-dir - Wind w/ Ice | Yes | Y | | 1 | 1 | 2 | 1 | 3 | 1 | 4 | 1 | | | |
| 2 | TIA_X-dir - Wind w/o Ice | Yes | Y | | 1 | 1 | 2 | 1 | 5 | 1 | | | | | |
| 3 | TIA_Z-dir - Wind w/ Ice | Yes | Y | | 1 | 1 | 2 | 1 | 3 | 1 | 6 | 1 | | | |
| 4 | TIA_Z-dir - Wind w/o Ice | Yes | Y | | 1 | 1 | 2 | 1 | 7 | 1 | | | | | |
| 5 | NESC 250B_X-dir - Wi... | | Y | | 1 | 1.5 | 2 | 1.5 | 3 | 1.5 | 8 | 2.5 | | | |
| 6 | NESC 250C_X-dir - Wi... | | Y | | 1 | 1 | 2 | 1 | 9 | 1 | | | | | |

Member Point Loads (BLC 2 : Weight of Equipment)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | Y | -101 | 52 |
| 2 | M2 | Y | -66 | 52 |
| 3 | M2 | Y | 0 | 52 |
| 4 | M2 | Y | 0 | 52 |
| 5 | M2 | Y | -158.7 | 52 |
| 6 | M2 | Y | 0 | 52 |
| 7 | M2 | Y | 0 | 52 |
| 8 | M2 | Y | 0 | 52 |
| 9 | M2 | Y | 0 | 52 |
| 10 | M2 | Y | 0 | 52 |
| 11 | M2 | Y | -101 | 43 |
| 12 | M2 | Y | -66 | 43 |
| 13 | M2 | Y | 0 | 43 |
| 14 | M2 | Y | 0 | 43 |
| 15 | M2 | Y | -109.2 | 43 |
| 16 | M2 | Y | -54 | 43 |
| 17 | M2 | Y | 0 | 43 |
| 18 | M2 | Y | 0 | 43 |



Member Point Loads (BLC 2 : Weight of Equipment) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 19 | M2 | Y | 0 | 43 |
| 20 | M2 | Y | 0 | 43 |

Member Point Loads (BLC 3 : Weight of Ice on Mast and Equip.)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | Y | -150 | 52 |
| 2 | M2 | Y | -97 | 52 |
| 3 | M2 | Y | 0 | 52 |
| 4 | M2 | Y | 0 | 52 |
| 5 | M2 | Y | -157.6 | 52 |
| 6 | M2 | Y | 0 | 52 |
| 7 | M2 | Y | 0 | 52 |
| 8 | M2 | Y | 0 | 52 |
| 9 | M2 | Y | 0 | 52 |
| 10 | M2 | Y | 0 | 52 |
| 11 | M2 | Y | -150 | 43 |
| 12 | M2 | Y | -97 | 43 |
| 13 | M2 | Y | 0 | 43 |
| 14 | M2 | Y | 0 | 43 |
| 15 | M2 | Y | -97.6 | 43 |
| 16 | M2 | Y | -17.7 | 43 |
| 17 | M2 | Y | 0 | 43 |
| 18 | M2 | Y | 0 | 43 |
| 19 | M2 | Y | 0 | 43 |
| 20 | M2 | Y | 0 | 43 |

Member Point Loads (BLC 4 : TIA X-dir - Wind w/ Ice)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | X | 147.5 | 52 |
| 2 | M2 | X | 0 | 52 |
| 3 | M2 | X | 0 | 52 |
| 4 | M2 | X | 0 | 52 |
| 5 | M2 | X | 810.3 | 52 |
| 6 | M2 | X | 0 | 52 |
| 7 | M2 | X | 0 | 52 |
| 8 | M2 | X | 0 | 52 |
| 9 | M2 | X | 0 | 52 |
| 10 | M2 | X | 0 | 52 |
| 11 | M2 | X | 144.1 | 43 |
| 12 | M2 | X | 0 | 43 |
| 13 | M2 | X | 0 | 43 |
| 14 | M2 | X | 0 | 43 |
| 15 | M2 | X | 520.6 | 43 |
| 16 | M2 | X | 69.7 | 43 |
| 17 | M2 | X | 0 | 43 |
| 18 | M2 | X | 0 | 43 |
| 19 | M2 | X | 0 | 43 |
| 20 | M2 | X | 0 | 43 |

Member Point Loads (BLC 5 : TIA X-dir - Wind w/o Ice)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|---|--------------|-----------|--------------------|----------------|
| 1 | M2 | X | 138.4 | 52 |
| 2 | M2 | X | 0 | 52 |
| 3 | M2 | X | 0 | 52 |
| 4 | M2 | X | 0 | 52 |



Member Point Loads (BLC 5 : TIA X-dir - Wind w/o Ice) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 5 | M2 | X | 981.8 | 52 |
| 6 | M2 | X | 0 | 52 |
| 7 | M2 | X | 0 | 52 |
| 8 | M2 | X | 0 | 52 |
| 9 | M2 | X | 0 | 52 |
| 10 | M2 | X | 0 | 52 |
| 11 | M2 | X | 135.2 | 43 |
| 12 | M2 | X | 0 | 43 |
| 13 | M2 | X | 0 | 43 |
| 14 | M2 | X | 0 | 43 |
| 15 | M2 | X | 620.2 | 43 |
| 16 | M2 | X | 72.6 | 43 |
| 17 | M2 | X | 0 | 43 |
| 18 | M2 | X | 0 | 43 |
| 19 | M2 | X | 0 | 43 |
| 20 | M2 | X | 0 | 43 |

Member Point Loads (BLC 6 : TIA Z-dir - Wind w/ Ice)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | Z | 147.5 | 52 |
| 2 | M2 | Z | 0 | 52 |
| 3 | M2 | Z | 0 | 52 |
| 4 | M2 | Z | 0 | 52 |
| 5 | M2 | Z | 810.3 | 52 |
| 6 | M2 | Z | 0 | 52 |
| 7 | M2 | Z | 0 | 52 |
| 8 | M2 | Z | 0 | 52 |
| 9 | M2 | Z | 0 | 52 |
| 10 | M2 | Z | 0 | 52 |
| 11 | M2 | Z | 144.1 | 43 |
| 12 | M2 | Z | 0 | 43 |
| 13 | M2 | Z | 0 | 43 |
| 14 | M2 | Z | 0 | 43 |
| 15 | M2 | Z | 520.6 | 43 |
| 16 | M2 | Z | 69.7 | 43 |
| 17 | M2 | Z | 0 | 43 |
| 18 | M2 | Z | 0 | 43 |
| 19 | M2 | Z | 0 | 43 |
| 20 | M2 | Z | 0 | 43 |

Member Point Loads (BLC 7 : TIA Z-dir - Wind w/o Ice)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | Z | 138.4 | 52 |
| 2 | M2 | Z | 0 | 52 |
| 3 | M2 | Z | 0 | 52 |
| 4 | M2 | Z | 0 | 52 |
| 5 | M2 | Z | 981.8 | 52 |
| 6 | M2 | Z | 0 | 52 |
| 7 | M2 | Z | 0 | 52 |
| 8 | M2 | Z | 0 | 52 |
| 9 | M2 | Z | 0 | 52 |
| 10 | M2 | Z | 0 | 52 |
| 11 | M2 | Z | 135.2 | 43 |
| 12 | M2 | Z | 0 | 43 |
| 13 | M2 | Z | 0 | 43 |
| 14 | M2 | Z | 0 | 43 |



Member Point Loads (BLC 7 : TIA Z-dir - Wind w/o Ice) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 15 | M2 | Z | 620.2 | 43 |
| 16 | M2 | Z | 72.6 | 43 |
| 17 | M2 | Z | 0 | 43 |
| 18 | M2 | Z | 0 | 43 |
| 19 | M2 | Z | 0 | 43 |
| 20 | M2 | Z | 0 | 43 |

Member Point Loads (BLC 8 : NESC 250B X-dir - Wind w/ Ice)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | X | 27 | 52 |
| 2 | M2 | X | 0 | 52 |
| 3 | M2 | X | 0 | 52 |
| 4 | M2 | X | 0 | 52 |
| 5 | M2 | X | 127 | 52 |
| 6 | M2 | X | 0 | 52 |
| 7 | M2 | X | 0 | 52 |
| 8 | M2 | X | 0 | 52 |
| 9 | M2 | X | 0 | 52 |
| 10 | M2 | X | 0 | 52 |
| 11 | M2 | X | 27 | 43 |
| 12 | M2 | X | 0 | 43 |
| 13 | M2 | X | 0 | 43 |
| 14 | M2 | X | 0 | 43 |
| 15 | M2 | X | 83.5 | 43 |
| 16 | M2 | X | 11.2 | 43 |
| 17 | M2 | X | 0 | 43 |
| 18 | M2 | X | 0 | 43 |
| 19 | M2 | X | 0 | 43 |
| 20 | M2 | X | 0 | 43 |

Member Point Loads (BLC 9 : NESC 250C X-dir - Wind w/o Ice)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | X | 208.5 | 52 |
| 2 | M2 | X | 0 | 52 |
| 3 | M2 | X | 0 | 52 |
| 4 | M2 | X | 0 | 52 |
| 5 | M2 | X | 1268 | 52 |
| 6 | M2 | X | 0 | 52 |
| 7 | M2 | X | 0 | 52 |
| 8 | M2 | X | 0 | 52 |
| 9 | M2 | X | 0 | 52 |
| 10 | M2 | X | 0 | 52 |
| 11 | M2 | X | 208.5 | 43 |
| 12 | M2 | X | 0 | 43 |
| 13 | M2 | X | 0 | 43 |
| 14 | M2 | X | 0 | 43 |
| 15 | M2 | X | 820.2 | 43 |
| 16 | M2 | X | 96 | 43 |
| 17 | M2 | X | 0 | 43 |
| 18 | M2 | X | 0 | 43 |
| 19 | M2 | X | 0 | 43 |
| 20 | M2 | X | 0 | 43 |



Member Distributed Loads (BLC 2 : Weight of Equipment)

| | Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|----|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | Y | -12 | -12 | 23 | 52 |
| 2 | M2 | Y | 0 | 0 | 23 | 52 |
| 3 | M2 | Y | 0 | 0 | 23 | 52 |
| 4 | M2 | Y | 0 | 0 | 23 | 52 |
| 5 | M2 | Y | 0 | 0 | 23 | 52 |
| 6 | M2 | Y | 0 | 0 | 23 | 52 |
| 7 | M2 | Y | -3 | -3 | 23 | 43 |
| 8 | M2 | Y | 0 | 0 | 23 | 43 |
| 9 | M2 | Y | 0 | 0 | 23 | 43 |
| 10 | M2 | Y | 0 | 0 | 23 | 43 |
| 11 | M2 | Y | 0 | 0 | 23 | 43 |
| 12 | M2 | Y | 0 | 0 | 23 | 43 |

Member Distributed Loads (BLC 3 : Weight of Ice on Mast and Equip.)

| | Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|----|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | Y | -8.2 | -8.2 | 0 | 0 |
| 2 | M2 | Y | -29.5 | -29.5 | 23 | 52 |
| 3 | M2 | Y | 0 | 0 | 23 | 52 |
| 4 | M2 | Y | 0 | 0 | 23 | 52 |
| 5 | M2 | Y | 0 | 0 | 23 | 52 |
| 6 | M2 | Y | 0 | 0 | 23 | 52 |
| 7 | M2 | Y | 0 | 0 | 23 | 52 |
| 8 | M4 | Y | -5.1 | -5.1 | 0 | 0 |
| 9 | M7 | Y | -5.1 | -5.1 | 0 | 0 |
| 10 | M9 | Y | -5.1 | -5.1 | 0 | 0 |
| 11 | M10 | Y | -5.1 | -5.1 | 0 | 0 |
| 12 | M4 | Y | 0 | 0 | 0 | 0 |
| 13 | M4 | Y | 0 | 0 | 0 | 0 |
| 14 | M2 | Y | 0 | 0 | 0 | 0 |
| 15 | M2 | Y | -7.4 | -7.4 | 23 | 43 |

Member Distributed Loads (BLC 4 : TIA X-dir - Wind w/ Ice)

| | Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|----|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | PX | 37.5 | 37.5 | 0 | 0 |
| 2 | M2 | PX | 26.9 | 26.9 | 23 | 52 |
| 3 | M2 | PX | 0 | 0 | 23 | 52 |
| 4 | M2 | PX | 0 | 0 | 23 | 52 |
| 5 | M2 | PX | 0 | 0 | 23 | 52 |
| 6 | M2 | PX | 0 | 0 | 23 | 52 |
| 7 | M2 | PX | 0 | 0 | 23 | 52 |
| 8 | M4 | PX | 26 | 26 | 0 | 0 |
| 9 | M7 | PX | 26 | 26 | 0 | 0 |
| 10 | M9 | PX | 22.3 | 22.3 | 0 | 0 |
| 11 | M10 | PX | 22.3 | 22.3 | 0 | 0 |
| 12 | M4 | PX | 0 | 0 | 0 | 0 |
| 13 | M4 | PX | 0 | 0 | 0 | 0 |
| 14 | M2 | PX | 0 | 0 | 0 | 0 |
| 15 | M2 | PX | 14.8 | 14.8 | 23 | 43 |

Member Distributed Loads (BLC 5 : TIA X-dir - Wind w/o Ice)

| | Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|---|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | PX | 45.9 | 45.9 | 0 | 0 |
| 2 | M2 | PX | 32 | 32 | 23 | 52 |
| 3 | M2 | PX | 0 | 0 | 23 | 52 |



Member Distributed Loads (BLC 5 : TIA X-dir - Wind w/o Ice) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 4 | M2 | PX | 0 | 23 | 52 |
| 5 | M2 | PX | 0 | 23 | 52 |
| 6 | M2 | PX | 0 | 23 | 52 |
| 7 | M2 | PX | 0 | 23 | 52 |
| 8 | M4 | PX | 29.4 | 0 | 0 |
| 9 | M7 | PX | 29.4 | 0 | 0 |
| 10 | M9 | PX | 25.2 | 0 | 0 |
| 11 | M10 | PX | 25.2 | 0 | 0 |
| 12 | M4 | PX | 0 | 0 | 0 |
| 13 | M4 | PX | 0 | 0 | 0 |
| 14 | M2 | PX | 0 | 0 | 0 |
| 15 | M2 | PX | 16 | 23 | 43 |

Member Distributed Loads (BLC 6 : TIA Z-dir - Wind w/ Ice)

| Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | PZ | 37.5 | 0 | 0 |
| 2 | M2 | PZ | 26.9 | 23 | 52 |
| 3 | M2 | PZ | 0 | 23 | 52 |
| 4 | M2 | PZ | 0 | 23 | 52 |
| 5 | M2 | PZ | 0 | 23 | 52 |
| 6 | M2 | PZ | 0 | 23 | 52 |
| 7 | M2 | PZ | 0 | 23 | 52 |
| 8 | M4 | PZ | 26 | 0 | 0 |
| 9 | M7 | PZ | 26 | 0 | 0 |
| 10 | M9 | PZ | 22.3 | 0 | 0 |
| 11 | M10 | PZ | 22.3 | 0 | 0 |
| 12 | M4 | PZ | 0 | 0 | 0 |
| 13 | M4 | PZ | 0 | 0 | 0 |
| 14 | M2 | PZ | 0 | 0 | 0 |
| 15 | M2 | PZ | 14.8 | 23 | 43 |

Member Distributed Loads (BLC 7 : TIA Z-dir - Wind w/o Ice)

| Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | PZ | 45.9 | 0 | 0 |
| 2 | M2 | PZ | 32 | 23 | 52 |
| 3 | M2 | PZ | 0 | 23 | 52 |
| 4 | M2 | PZ | 0 | 23 | 52 |
| 5 | M2 | PZ | 0 | 23 | 52 |
| 6 | M2 | PZ | 0 | 23 | 52 |
| 7 | M2 | PZ | 0 | 23 | 52 |
| 8 | M4 | PZ | 29.4 | 0 | 0 |
| 9 | M7 | PZ | 29.4 | 0 | 0 |
| 10 | M9 | PZ | 25.2 | 0 | 0 |
| 11 | M10 | PZ | 25.2 | 0 | 0 |
| 12 | M4 | PZ | 0 | 0 | 0 |
| 13 | M4 | PZ | 0 | 0 | 0 |
| 14 | M2 | PZ | 0 | 0 | 0 |
| 15 | M2 | PZ | 16 | 23 | 43 |

Member Distributed Loads (BLC 8 : NESC 250B X-dir - Wind w/ Ice)

| Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | PX | 5.9 | 0 | 0 |
| 2 | M2 | PX | 4.8 | 23 | 52 |
| 3 | M2 | PX | 0 | 23 | 52 |
| 4 | M2 | PX | 0 | 23 | 52 |



Member Distributed Loads (BLC 8 : NESC 250B X-dir - Wind w/ Ice) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 5 | M2 | PX | 0 | 23 | 52 |
| 6 | M2 | PX | 0 | 23 | 52 |
| 7 | M2 | PX | 0 | 23 | 52 |
| 8 | M4 | PX | 3.2 | 0 | 0 |
| 9 | M7 | PX | 3.2 | 0 | 0 |
| 10 | M9 | PX | 3.2 | 0 | 0 |
| 11 | M10 | PX | 3.2 | 0 | 0 |
| 12 | M4 | PX | 0 | 0 | 0 |
| 13 | M4 | PX | 0 | 0 | 0 |
| 14 | M2 | PX | 0 | 0 | 0 |
| 15 | M2 | PX | 2.6 | 23 | 43 |

Member Distributed Loads (BLC 9 : NESC 250C X-dir - Wind w/o Ice)

| Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | PX | 60 | 32 | 55 |
| 2 | M2 | PX | 46.6 | 32 | 52 |
| 3 | M2 | PX | 0 | 32 | 52 |
| 4 | M2 | PX | 0 | 32 | 52 |
| 5 | M2 | PX | 0 | 32 | 52 |
| 6 | M2 | PX | 0 | 32 | 52 |
| 7 | M2 | PX | 0 | 32 | 52 |
| 8 | M2 | PX | 48 | 0 | 32 |
| 9 | M2 | PX | 37.3 | 23 | 32 |
| 10 | M2 | PX | 0 | 23 | 32 |
| 11 | M2 | PX | 0 | 23 | 32 |
| 12 | M2 | PX | 0 | 23 | 32 |
| 13 | M2 | PX | 0 | 23 | 32 |
| 14 | M2 | PX | 0 | 23 | 32 |
| 15 | M4 | PX | 27.8 | 0 | 0 |
| 16 | M7 | PX | 27.8 | 0 | 0 |
| 17 | M9 | PX | 27.8 | 0 | 0 |
| 18 | M10 | PX | 27.8 | 0 | 0 |
| 19 | M4 | PX | 0 | 0 | 0 |
| 20 | M4 | PX | 0 | 0 | 0 |
| 21 | M2 | PX | 0 | 32 | 55 |
| 22 | M2 | PX | 23.3 | 32 | 43 |
| 23 | M2 | PX | 0 | 32 | 43 |
| 24 | M2 | PX | 0 | 32 | 43 |
| 25 | M2 | PX | 0 | 32 | 43 |
| 26 | M2 | PX | 0 | 32 | 43 |
| 27 | M2 | PX | 0 | 32 | 43 |
| 28 | M2 | PX | 0 | 0 | 32 |
| 29 | M2 | PX | 18.6 | 23 | 32 |

Envelope Member Section Forces

| Member | Sec | Axial[lb] | LC | y Shear[lb] | LC | z Shear[lb] | LC | Torque[k-...] | LC | y-y Moment... | LC | z-z Mome... | LC | | |
|--------|-----|-----------|------|-------------|----|-------------|----|---------------|----|---------------|----|-------------|----|--------|---|
| 1 | M2 | 1 | m... | 7953.757 | 1 | -404.013 | 4 | 3493.846 | 4 | 2.336 | 4 | .545 | 2 | -4.31 | 4 |
| 2 | | | m... | 2275.297 | 4 | -4433.076 | 2 | -50.257 | 2 | -0.18 | 2 | -6.596 | 4 | -14.76 | 1 |
| 3 | | 2 | m... | 6964.898 | 1 | -404.013 | 4 | 4124.971 | 4 | 2.336 | 4 | 45.784 | 4 | 51.224 | 2 |
| 4 | | | m... | 1399.188 | 4 | -5064.201 | 2 | -50.257 | 2 | -0.18 | 2 | -.146 | 2 | 1.245 | 4 |
| 5 | | 3 | m... | 4578.468 | 3 | 4287.48 | 2 | -.665 | 2 | 0 | 1 | 69.998 | 4 | 70.063 | 2 |
| 6 | | | m... | 2748.618 | 2 | 1.447 | 4 | -4283.085 | 4 | 0 | 1 | .01 | 2 | .021 | 4 |
| 7 | | 4 | m... | 2875.984 | 3 | 2981.074 | 2 | -.281 | 2 | 0 | 1 | 20.087 | 4 | 20.113 | 2 |
| 8 | | | m... | 1666.259 | 4 | .611 | 4 | -2979.218 | 4 | 0 | 1 | .004 | 2 | .008 | 4 |
| 9 | | 5 | m... | 0 | 1 | 43.355 | 1 | -.281 | 2 | 0 | 1 | 0 | 1 | 0 | 1 |



Envelope Member Section Forces (Continued)

| Member | Sec | Axial[lb] | LC | y Shear[lb] | LC | z Shear[lb] | LC | Torque[k-...] | LC | y-y Moment... | LC | z-z Mome... | LC |
|--------|-----|-----------|----------------|-------------|-----------|-------------|-----------|---------------|--------|---------------|--------|-------------|---------|
| 10 | | 0 | 1 | .611 | 4 | -40.312 | 3 | 0 | 1 | 0 | 1 | 0 | 1 |
| 11 | M3 | 1 | m...-2078.4... | 3 | -417.158 | 3 | -3.697 | 3 | 0 | 1 | 0 | 1 | 0 |
| 12 | | 2 | m...-5172.6... | 2 | -1540.953 | 2 | -28.195 | 2 | 0 | 1 | 0 | 1 | 0 |
| 13 | | 2 | m...-2078.4... | 3 | -420.736 | 3 | -3.697 | 3 | 0 | 1 | 0 | 3 | .289 |
| 14 | | 2 | m...-5172.6... | 2 | -1544.53 | 2 | -28.195 | 2 | 0 | 1 | -0.005 | 2 | .079 |
| 15 | | 3 | m...-2078.4... | 3 | -424.313 | 3 | -3.697 | 3 | 0 | 1 | -0.001 | 3 | .579 |
| 16 | | 2 | m...-5172.6... | 2 | -1548.108 | 2 | -28.195 | 2 | 0 | 1 | -0.011 | 2 | .158 |
| 17 | | 4 | m...-2078.4... | 3 | -427.89 | 3 | -3.697 | 3 | 0 | 1 | -0.002 | 3 | .87 |
| 18 | | 2 | m...-5172.6... | 2 | -1551.685 | 2 | -28.195 | 2 | 0 | 1 | -0.016 | 2 | .238 |
| 19 | | 5 | m...-2078.4... | 3 | -431.467 | 3 | -3.697 | 3 | 0 | 1 | -0.003 | 3 | 1.161 |
| 20 | | 2 | m...-5172.6... | 2 | -1555.262 | 2 | -28.195 | 2 | 0 | 1 | -0.021 | 2 | .318 |
| 21 | M4 | 1 | m... 0 | 1 | -429.092 | 3 | 5172.641 | 2 | 1.161 | 2 | -0.003 | 3 | 0 |
| 22 | | 1 | m... 0 | 1 | -1516.092 | 2 | 2078.438 | 3 | .318 | 3 | -0.021 | 2 | 0 |
| 23 | | 2 | m... 0 | 1 | -471.405 | 3 | 5121.191 | 2 | 1.161 | 2 | 8.986 | 2 | 2.682 |
| 24 | | 1 | m... 0 | 1 | -1549.48 | 2 | 2078.438 | 3 | .318 | 3 | 3.634 | 3 | .788 |
| 25 | | 3 | m...9242.242 | 4 | -638.968 | 1 | 5069.741 | 2 | 3.037 | 3 | 17.938 | 2 | 5.423 |
| 26 | | 2 | m...-48.401 | 2 | -3957.416 | 3 | 1470.984 | 3 | .436 | 1 | 7.272 | 3 | -13.999 |
| 27 | | 4 | m...9242.242 | 4 | 1392.597 | 2 | 1877.605 | 4 | 3.037 | 3 | 8.985 | 2 | 2.408 |
| 28 | | 2 | m...-48.401 | 2 | -3999.729 | 3 | -5141.455 | 2 | -1.044 | 2 | 3.332 | 3 | -7.037 |
| 29 | | 5 | m...9242.242 | 4 | 1359.209 | 2 | 1877.605 | 4 | 3.037 | 3 | 6.936 | 4 | 0 |
| 30 | | 2 | m...-48.401 | 2 | -4042.041 | 3 | -5192.905 | 2 | -1.044 | 2 | -0.057 | 2 | 0 |
| 31 | M5 | 1 | m...1888.798 | 4 | 1399.246 | 2 | 76.666 | 2 | 0 | 1 | 6.936 | 4 | 1.044 |
| 32 | | 2 | m...-5193.0... | 2 | -4041.757 | 3 | -9248.603 | 4 | 0 | 1 | -0.057 | 2 | -3.037 |
| 33 | | 2 | m...1888.798 | 4 | 1395.669 | 2 | 76.666 | 2 | 0 | 1 | 5.202 | 4 | .782 |
| 34 | | 2 | m...-5193.0... | 2 | -4045.335 | 3 | -9248.603 | 4 | 0 | 1 | -0.043 | 2 | -2.279 |
| 35 | | 3 | m...1888.798 | 4 | 1392.092 | 2 | 76.666 | 2 | 0 | 1 | 3.468 | 4 | .521 |
| 36 | | 2 | m...-5193.0... | 2 | -4048.912 | 3 | -9248.603 | 4 | 0 | 1 | -0.029 | 2 | -1.52 |
| 37 | | 4 | m...1888.798 | 4 | 1388.515 | 2 | 76.666 | 2 | 0 | 1 | 1.734 | 4 | .26 |
| 38 | | 2 | m...-5193.0... | 2 | -4052.489 | 3 | -9248.603 | 4 | 0 | 1 | -0.014 | 2 | -.76 |
| 39 | | 5 | m...1888.798 | 4 | 1384.937 | 2 | 76.666 | 2 | 0 | 1 | 0 | 1 | 0 |
| 40 | | 2 | m...-5193.0... | 2 | -4056.067 | 3 | -9248.603 | 4 | 0 | 1 | 0 | 1 | 0 |
| 41 | M6 | 1 | m...2106.62 | 2 | 4026.628 | 1 | -.615 | 4 | 0 | 1 | 0 | 1 | 0 |
| 42 | | 4 | m...777.456 | 4 | 2171.756 | 4 | -4.804 | 2 | 0 | 1 | 0 | 1 | 0 |
| 43 | | 2 | m...2106.62 | 2 | 4023.051 | 1 | -.615 | 4 | 0 | 1 | 0 | 4 | -.407 |
| 44 | | 4 | m...777.456 | 4 | 2168.179 | 4 | -4.804 | 2 | 0 | 1 | 0 | 2 | -.755 |
| 45 | | 3 | m...2106.62 | 2 | 4019.474 | 1 | -.615 | 4 | 0 | 1 | 0 | 4 | -.813 |
| 46 | | 4 | m...777.456 | 4 | 2164.602 | 4 | -4.804 | 2 | 0 | 1 | -0.002 | 2 | -1.509 |
| 47 | | 4 | m...2106.62 | 2 | 4015.896 | 1 | -.615 | 4 | 0 | 1 | 0 | 4 | -1.219 |
| 48 | | 4 | m...777.456 | 4 | 2161.025 | 4 | -4.804 | 2 | 0 | 1 | -0.003 | 2 | -2.262 |
| 49 | | 5 | m...2106.62 | 2 | 4012.319 | 1 | -.615 | 4 | 0 | 1 | 0 | 4 | -1.623 |
| 50 | | 4 | m...777.456 | 4 | 2157.447 | 4 | -4.804 | 2 | 0 | 1 | -0.004 | 2 | -3.015 |
| 51 | M7 | 1 | m... 0 | 1 | 4005.402 | 1 | -777.456 | 4 | -1.623 | 4 | 0 | 4 | 0 |
| 52 | | 1 | m... 0 | 1 | 2155.232 | 4 | -2106.62 | 2 | -3.015 | 1 | -0.004 | 2 | 0 |
| 53 | | 2 | m... 0 | 1 | 3963.089 | 1 | -777.456 | 4 | -1.623 | 4 | -1.361 | 4 | -3.742 |
| 54 | | 1 | m... 0 | 1 | 2121.844 | 4 | -2158.07 | 2 | -3.015 | 1 | -3.735 | 2 | -6.972 |
| 55 | | 3 | m...48.401 | 2 | 2509.149 | 3 | 2229.789 | 2 | 3.119 | 1 | -2.722 | 4 | -7.426 |
| 56 | | 4 | m...-3466.9... | 4 | -4059.295 | 1 | -798.416 | 3 | -1.953 | 3 | -7.592 | 2 | -14.356 |
| 57 | | 4 | m...48.401 | 2 | -237.25 | 4 | 2178.339 | 2 | 3.119 | 1 | -1.891 | 3 | -.444 |
| 58 | | 4 | m...-3466.9... | 4 | -4101.607 | 1 | -374.881 | 4 | .211 | 4 | -3.734 | 2 | -7.215 |
| 59 | | 5 | m...48.401 | 2 | -270.638 | 4 | 2126.889 | 2 | 3.119 | 1 | .033 | 2 | 0 |
| 60 | | 4 | m...-3466.9... | 4 | -4143.92 | 1 | -374.881 | 4 | .211 | 4 | -2.6 | 4 | 0 |
| 61 | M8 | 1 | m...2126.811 | 2 | -273.786 | 4 | 3466.415 | 4 | 0 | 1 | .033 | 2 | -.211 |
| 62 | | 4 | m...-372.988 | 4 | -4150.993 | 1 | -43.568 | 2 | 0 | 1 | -2.6 | 4 | -3.119 |
| 63 | | 2 | m...2126.811 | 2 | -277.364 | 4 | 3466.415 | 4 | 0 | 1 | .025 | 2 | -.159 |
| 64 | | 4 | m...-372.988 | 4 | -4154.57 | 1 | -43.568 | 2 | 0 | 1 | -1.95 | 4 | -2.34 |
| 65 | | 3 | m...2126.811 | 2 | -280.941 | 4 | 3466.415 | 4 | 0 | 1 | .016 | 2 | -.107 |
| 66 | | 4 | m...-372.988 | 4 | -4158.148 | 1 | -43.568 | 2 | 0 | 1 | -1.3 | 4 | -1.561 |



Envelope Member Section Forces (Continued)

| Member | Sec | Axial[lb] | LC | y Shear[lb] | LC | z Shear[lb] | LC | Torque[k-... | LC | y-y Moment... | LC | z-z Mome... | LC | |
|--------|-----|----------------|--------------|-------------|----------|-------------|----------|--------------|-------|---------------|-------|-------------|--------|---|
| 67 | 4 | m...2126.811 | 2 | -284.518 | 4 | 3466.415 | 4 | 0 | 1 | .008 | 2 | -.054 | 4 | |
| 68 | | m...-372.988 | 4 | -4161.725 | 1 | -43.568 | 2 | 0 | 1 | -.65 | 4 | -.781 | 1 | |
| 69 | 5 | m...2126.811 | 2 | -288.095 | 4 | 3466.415 | 4 | 0 | 1 | 0 | 1 | 0 | 1 | |
| 70 | | m...-372.988 | 4 | -4165.302 | 1 | -43.568 | 2 | 0 | 1 | 0 | 1 | 0 | 1 | |
| 71 | M9 | 1 | m...-404.468 | 4 | 3435.601 | 3 | 48.346 | 2 | -.49 | 1 | 7.658 | 4 | 2.205 | 2 |
| 72 | | m...-10159.... | 2 | -3100.623 | 2 | -9241.734 | 4 | -18.202 | 4 | -.035 | 2 | -2.718 | 3 | |
| 73 | 2 | m...-404.468 | 4 | 3429.055 | 3 | 48.346 | 2 | -.49 | 1 | 5.157 | 4 | 3.045 | 2 | |
| 74 | | m...-10159.... | 2 | -3105.788 | 2 | -9234.911 | 4 | -18.202 | 4 | -.021 | 2 | -3.648 | 3 | |
| 75 | 3 | m...-404.468 | 4 | 3422.508 | 3 | 48.346 | 2 | -.49 | 1 | 2.658 | 4 | 3.887 | 2 | |
| 76 | | m...-10159.... | 2 | -3110.954 | 2 | -9228.088 | 4 | -18.202 | 4 | -.008 | 2 | -4.575 | 3 | |
| 77 | 4 | m...-404.468 | 4 | 3415.962 | 3 | 48.346 | 2 | -.49 | 1 | .16 | 4 | 4.73 | 2 | |
| 78 | | m...-10159.... | 2 | -3116.119 | 2 | -9221.266 | 4 | -18.202 | 4 | .004 | 1 | -5.501 | 3 | |
| 79 | 5 | m...-404.468 | 4 | 3409.416 | 3 | 48.346 | 2 | -.49 | 1 | .018 | 2 | 5.574 | 2 | |
| 80 | | m...-10159.... | 2 | -3121.285 | 2 | -9214.443 | 4 | -18.202 | 4 | -2.336 | 4 | -6.425 | 3 | |
| 81 | M10 | 1 | m...4439.231 | 2 | 7978.915 | 1 | 3467.032 | 4 | 6.596 | 4 | .035 | 2 | -1.834 | 4 |
| 82 | | m...404.468 | 4 | 2296.334 | 4 | -48.425 | 2 | -.545 | 2 | -1.434 | 4 | -6.133 | 1 | |
| 83 | 2 | m...4439.231 | 2 | 7972.368 | 1 | 3473.855 | 4 | 6.596 | 4 | .022 | 2 | -2.455 | 4 | |
| 84 | | m...404.468 | 4 | 2291.168 | 4 | -48.425 | 2 | -.545 | 2 | -.494 | 4 | -8.293 | 1 | |
| 85 | 3 | m...4439.231 | 2 | 7965.822 | 1 | 3480.678 | 4 | 6.596 | 4 | .447 | 4 | -3.075 | 4 | |
| 86 | | m...404.468 | 4 | 2286.002 | 4 | -48.425 | 2 | -.545 | 2 | .007 | 1 | -10.45 | 1 | |
| 87 | 4 | m...4439.231 | 2 | 7959.276 | 1 | 3487.501 | 4 | 6.596 | 4 | 1.391 | 4 | -3.693 | 4 | |
| 88 | | m...404.468 | 4 | 2280.837 | 4 | -48.425 | 2 | -.545 | 2 | -.005 | 2 | -12.606 | 1 | |
| 89 | 5 | m...4439.231 | 2 | 7952.729 | 1 | 3494.324 | 4 | 6.596 | 4 | 2.336 | 4 | -4.31 | 4 | |
| 90 | | m...404.468 | 4 | 2275.671 | 4 | -48.425 | 2 | -.545 | 2 | -.018 | 2 | -14.76 | 1 | |

Envelope AISC ASD Steel Code Checks

| Mem... | Shape | Code Ch... | Loc[ft] | LC | Shear Check | Loc[ft] | Dir | LC | Fa [ksi] | Ft [ksi] | Fb y-y [k... | Fb z-z [k... | Cb | Cmy | Cmd | ASD E... | |
|--------|-------|------------|---------|--------|-------------|---------|--------|----|----------|----------|--------------|--------------|--------|--------|------|----------|------|
| 1 | M2 | PIPE_12.0X | .715 | 21.771 | 2 | .042 | 21.198 | 4 | 8.832 | 27.93 | 30.723 | 30.723 | 1 | .6 | .85 | H1-2 | |
| 2 | M3 | HSS6x6x4 | .064 | .75 | 2 | .023 | .75 | y | 2 | 36.403 | 36.708 | 40.379 | 40.379 | 1.75 | .6 | .85 | H2-1 |
| 3 | M4 | HSS6x6x4 | .728 | 3.5 | 2 | .155 | 7 | y | 3 | 32.524 | 36.708 | 40.379 | 40.379 | 1 | .85 | .85 | H2-1 |
| 4 | M5 | HSS6x6x4 | .316 | 0 | 4 | .135 | 0 | z | 4 | 36.403 | 36.708 | 40.379 | 40.379 | 1.75 | .6 | .85 | H1-2 |
| 5 | M6 | HSS6x6x4 | .104 | .75 | 1 | .059 | 0 | y | 1 | 36.403 | 36.708 | 40.379 | 40.379 | 1.75 | .6 | .85 | H1-2 |
| 6 | M7 | HSS6x6x4 | .666 | 3.5 | 1 | .159 | 7 | y | 1 | 32.524 | 36.708 | 40.379 | 40.379 | 1 | .85 | .85 | H1-2 |
| 7 | M8 | HSS6x6x4 | .108 | 0 | 1 | .061 | .75 | y | 1 | 36.403 | 36.708 | 40.379 | 40.379 | 1.75 | .6 | .85 | H1-2 |
| 8 | M9 | HSS6x6x4 | .299 | 0 | 4 | .711 | 0 | z | 4 | 36.256 | 36.708 | 40.379 | 40.379 | 1.3... | .85 | .85 | H2-1 |
| 9 | M10 | HSS6x6x4 | .482 | 1.083 | 1 | .260 | 1.083 | z | 4 | 36.256 | 36.708 | 40.379 | 40.379 | 1.3... | .395 | .85 | H1-2 |


Envelope Joint Reactions

| Joint | X [lb] | LC | Y [lb] | LC | Z [lb] | LC | MX [k-ft] | LC | MY [k-ft] | LC | MZ [k-ft] | LC |
|-------|---------|-----|-----------|----|-----------|----|-----------|----|-----------|----|-----------|----|
| 1 | TM3 | max | 2126.811 | 2 | 4158.101 | 1 | 3466.959 | 4 | 0 | 1 | 0 | 1 |
| 2 | | min | -372.988 | 4 | 288.587 | 4 | -48.401 | 2 | 0 | 1 | 0 | 1 |
| 3 | TM4 | max | 2106.62 | 2 | 4019.711 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| 4 | | min | 777.456 | 4 | 2169.541 | 4 | 0 | 1 | 0 | 1 | 0 | 1 |
| 5 | TM1 | max | 1888.798 | 4 | 4048.997 | 3 | 48.401 | 2 | 0 | 1 | 0 | 1 |
| 6 | | min | -5193.091 | 2 | -1344.954 | 2 | -9242.242 | 4 | 0 | 1 | 0 | 1 |
| 7 | TM2 | max | -2078.438 | 3 | -414.783 | 3 | 0 | 1 | 0 | 1 | 0 | 1 |
| 8 | | min | -5172.641 | 2 | -1501.783 | 2 | 0 | 1 | 0 | 1 | 0 | 1 |
| 9 | Totals: | max | 0 | 3 | 7237.845 | 1 | 0 | 2 | | | | |
| 10 | | min | -6132.3 | 2 | 4933.998 | 4 | -5775.283 | 4 | | | | |



Joint Reactions

| | LC | Joint Label | X [lb] | Y [lb] | Z [lb] | MX [k-ft] | MY [k-ft] | MZ [k-ft] |
|----|----|-------------|-----------|-----------|---------|-----------|-----------|-----------|
| 1 | 5 | TM3 | 1151.942 | 3686.98 | -21.901 | 0 | 0 | 0 |
| 2 | 5 | TM4 | 1142.791 | 3615.89 | 0 | 0 | 0 | 0 |
| 3 | 5 | TM1 | -2197.219 | 1813.149 | 21.901 | 0 | 0 | 0 |
| 4 | 5 | TM2 | -2188.015 | 1740.747 | 0 | 0 | 0 | 0 |
| 5 | 5 | Totals: | -2090.5 | 10856.767 | 0 | | | |
| 6 | 5 | COG (ft): | X: 1.767 | Y: 32.239 | Z: 0 | | | |
| 7 | 6 | TM3 | 2881.433 | 4908.814 | -62.567 | 0 | 0 | 0 |
| 8 | 6 | TM4 | 2855.367 | 4705.584 | 0 | 0 | 0 | 0 |
| 9 | 6 | TM1 | -6680.552 | -2237.81 | 62.567 | 0 | 0 | 0 |
| 10 | 6 | TM2 | -6654.048 | -2442.59 | 0 | 0 | 0 | 0 |
| 11 | 6 | Totals: | -7597.8 | 4933.998 | 0 | | | |
| 12 | 6 | COG (ft): | X: 1.753 | Y: 29.685 | Z: 0 | | | |

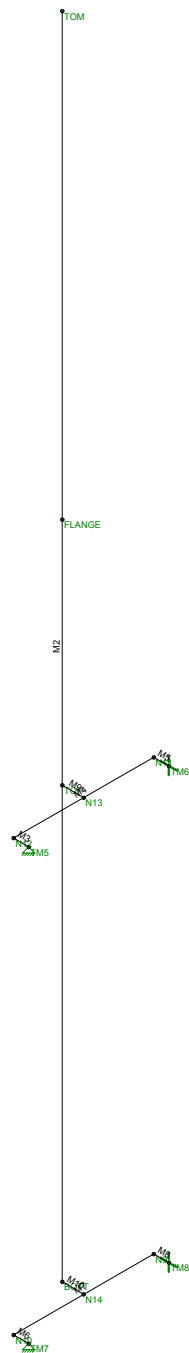

Envelope Only Solution


| |
|-------------------------|
| Paul J Ford and Company |
| CBH |
| 31216-0025.001.6090 |

| |
|---------------------------------------|
| North Mast on Eversource Tower # 1102 |
|---------------------------------------|

| |
|-------------------------------------|
| M2 - 1 |
| Aug 8, 2016 at 9:05 AM |
| 31216-0025.001.6090 - North Mast... |



| Code Check (Elem) | |
|-------------------|---------|
| ■ | No Calc |
| ■ | > 1.0 |
| ■ | 40-1.0 |
| ■ | 75-90 |
| ■ | 50-75 |
| ■ | 0-.50 |

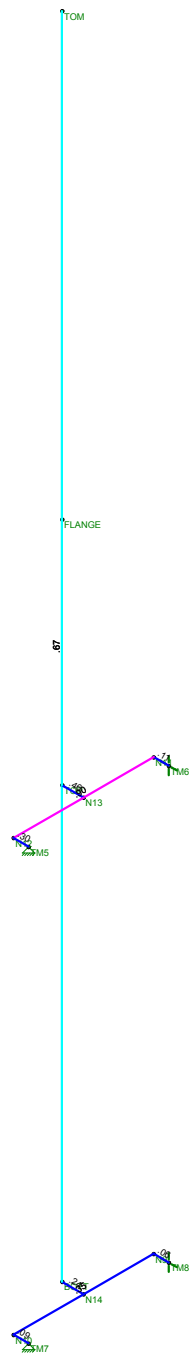

Member Code Checks Displayed (Enveloped)
Envelope Only Solution

| | | |
|-------------------------|---------------------------------------|-------------------------------------|
| Paul J Ford and Company | North Mast on Eversource Tower # 1102 | M2 - 2 |
| CBH | | Aug 8, 2016 at 9:06 AM |
| 31216-0025.001.6090 | | 31216-0025.001.6090 - North Mast... |



(Global) Model Settings

| | |
|--|--------------------|
| Display Sections for Member Calcs | 5 |
| Max Internal Sections for Member Calcs | 97 |
| Include Shear Deformation? | Yes |
| Increase Nailing Capacity for Wind? | Yes |
| Include Warping? | Yes |
| Trans Load Btwn Intersecting Wood Wall? | Yes |
| Area Load Mesh (in^2) | 144 |
| Merge Tolerance (in) | .12 |
| P-Delta Analysis Tolerance | 0.50% |
| Include P-Delta for Walls? | Yes |
| Automatically Iterate Stiffness for Walls? | No |
| Max Iterations for Wall Stiffness | 3 |
| Gravity Acceleration (ft/sec^2) | 32.2 |
| Wall Mesh Size (in) | 12 |
| Eigensolution Convergence Tol. (1.E-) | 4 |
| Vertical Axis | Y |
| Global Member Orientation Plane | XZ |
| Static Solver | Sparse Accelerated |
| Dynamic Solver | Standard Solver |

| | |
|------------------------|-----------------|
| Hot Rolled Steel Code | AISC 9th: ASD |
| RISAConnection Code | None |
| Cold Formed Steel Code | None |
| Wood Code | None |
| Wood Temperature | < 100F |
| Concrete Code | None |
| Masonry Code | None |
| Aluminum Code | None - Building |

| | |
|-------------------------------|--------------------|
| Number of Shear Regions | 4 |
| Region Spacing Increment (in) | 4 |
| Biaxial Column Method | PCA Load Contour |
| Parme Beta Factor (PCA) | .65 |
| Concrete Stress Block | Rectangular |
| Use Cracked Sections? | Yes |
| Use Cracked Sections Slab? | Yes |
| Bad Framing Warnings? | No |
| Unused Force Warnings? | Yes |
| Min 1 Bar Diam. Spacing? | No |
| Concrete Rebar Set | REBAR_SET_ASTMA615 |
| Min % Steel for Column | 1 |
| Max % Steel for Column | 8 |



(Global) Model Settings, Continued

| | |
|-----------------------------|-------------|
| Seismic Code | UBC 1997 |
| Seismic Base Elevation (ft) | Not Entered |
| Add Base Weight? | No |
| Ct X | .035 |
| Ct Z | .035 |
| T X (sec) | Not Entered |
| T Z (sec) | Not Entered |
| R X | 8.5 |
| R Z | 8.5 |
| Ca | .36 |
| Cv | .54 |
| Nv | 1 |
| Occupancy Category | 4 |
| Seismic Zone | 3 |
| Om Z | 1 |
| Om X | 1 |
| Rho Z | 1 |
| Rho X | 1 |

Joint Coordinates and Temperatures

| | Label | X [ft] | Y [ft] | Z [ft] | Temp [F] | Detach From Diaphragm |
|----|--------|--------|--------|--------|----------|-----------------------|
| 1 | BOTT | -1.833 | 0 | 0. | 0 | |
| 2 | TOP | -1.833 | 21.5 | 0. | 0 | |
| 3 | FLANGE | -1.833 | 33 | 0. | 0 | |
| 4 | TOM | -1.833 | 55 | 0. | 0 | |
| 5 | TM8 | 0 | 0 | -3.5 | 0 | |
| 6 | TM7 | 0 | 0 | 3.5 | 0 | |
| 7 | TM6 | 0 | 21.5 | -3.5 | 0 | |
| 8 | TM5 | 0 | 21.5 | 3.5 | 0 | |
| 9 | N9 | -.75 | 0 | -3.5 | 0 | |
| 10 | N10 | -.75 | 0 | 3.5 | 0 | |
| 11 | N11 | -.75 | 21.5 | -3.5 | 0 | |
| 12 | N12 | -.75 | 21.5 | 3.5 | 0 | |
| 13 | N13 | -.75 | 21.5 | 0. | 0 | |
| 14 | N14 | -.75 | 0 | 0. | 0 | |

Hot Rolled Steel Properties

| | Label | E [ksi] | G [ksi] | Nu | Therm (\1E5 F) | Density[k/ft^3] | Yield[ksi] | Ry | Fu[ksi] | Rt |
|---|-----------------|---------|---------|----|----------------|-----------------|------------|-----|---------|-----|
| 1 | A572 Gr.50 | 29000 | 11154 | .3 | .65 | .49 | 50 | 1.1 | 65 | 1.2 |
| 2 | A992 | 29000 | 11154 | .3 | .65 | .49 | 50 | 1.1 | 65 | 1.2 |
| 3 | A500 Gr.B (42) | 29000 | 11154 | .3 | .65 | .49 | 42 | 1.3 | 58 | 1.1 |
| 4 | A500 Gr. B (46) | 29000 | 11154 | .3 | .65 | .49 | 46 | 1.5 | 58 | 1.2 |
| 5 | A500 Gr. C (46) | 29000 | 11154 | .3 | .65 | .49 | 46 | 1.5 | 62 | 1.2 |
| 6 | A500 Gr. C (50) | 29000 | 11154 | .3 | .65 | .49 | 50 | 1.5 | 62 | 1.2 |
| 7 | A53 Gr. B | 29000 | 11154 | .3 | .65 | .49 | 35 | 1.5 | 60 | 1.2 |
| 8 | A36 | 29000 | 11154 | .3 | .65 | .49 | 36 | 1.5 | 58 | 1.2 |

Hot Rolled Steel Section Sets

| | Label | Shape | Type | Design List | Material | Design Ru... | A [in2] | Iyy [in4] | Izz [in4] | J [in4] |
|---|-------|------------|------|-------------|-----------------|--------------|---------|-----------|-----------|---------|
| 1 | MAST | PIPE 12.0X | Beam | Pipe | A53 Gr. B | Typical | 17.5 | 339 | 339 | 678 |
| 2 | Brace | HSS6x6x4 | Beam | Tube | A500 Gr. B (46) | Typical | 5.24 | 28.6 | 28.6 | 45.6 |



Member Primary Data

| | Label | I Joint | J Joint | K Joint | Rotate(deg) | Section/Shape | Type | Design List | Material | Design Rules |
|---|-------|---------|---------|---------|-------------|---------------|------|-------------|-----------------|--------------|
| 1 | M2 | BOTT | TOM | | | MAST | Beam | Pipe | A53 Gr. B | Typical |
| 2 | M3 | TM5 | N12 | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 3 | M4 | N12 | N11 | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 4 | M5 | N11 | TM6 | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 5 | M6 | TM7 | N10 | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 6 | M7 | N10 | N9 | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 7 | M8 | N9 | TM8 | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 8 | M9 | N13 | TOP | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |
| 9 | M10 | N14 | BOTT | | | Brace | Beam | Tube | A500 Gr. B (46) | Typical |

Basic Load Cases

| | BLC Description | Category | X Gravity | Y Gravity | Z Gravity | Joint | Point | Distribut. | Area(Member) | Surface(P... |
|---|----------------------------------|----------|-----------|-----------|-----------|-------|-------|------------|--------------|--------------|
| 1 | Self Weight (Mast Members) | None | | -1.07 | | | | | | |
| 2 | Weight of Equipment | None | | | | | 20 | 12 | | |
| 3 | Weight of Ice on Mast and Equip. | None | | | | | 20 | 15 | | |
| 4 | TIA_X-dir - Wind w/ Ice | None | | | | | 20 | 15 | | |
| 5 | TIA_X-dir - Wind w/o Ice | None | | | | | 20 | 15 | | |
| 6 | TIA_Z-dir - Wind w/ Ice | None | | | | | 20 | 15 | | |
| 7 | TIA_Z-dir - Wind w/o Ice | None | | | | | 20 | 15 | | |
| 8 | NESC 250B_X-dir - Wind w/ Ice | None | | | | | 20 | 15 | | |
| 9 | NESC 250C_X-dir - Wind w/o Ice | None | | | | | 20 | 29 | | |

Load Combinations

| | Description | Solve P | Delta S... | BLC Factor | BLC Factor | BLC Factor | BLC Factor | F..... | F..... | F..... | F..... | F..... | F..... |
|---|--------------------------|---------|------------|------------|------------|------------|------------|--------|--------|--------|--------|--------|--------|
| 1 | TIA_X-dir - Wind w/ Ice | Yes | Y | 1 | 1 | 2 | 1 | 3 | 1 | 4 | 1 | | |
| 2 | TIA_X-dir - Wind w/o Ice | Yes | Y | 1 | 1 | 2 | 1 | 5 | 1 | | | | |
| 3 | TIA_Z-dir - Wind w/ Ice | Yes | Y | 1 | 1 | 2 | 1 | 3 | 1 | 6 | 1 | | |
| 4 | TIA_Z-dir - Wind w/o Ice | Yes | Y | 1 | 1 | 2 | 1 | 7 | 1 | | | | |
| 5 | NESC 250B_X-dir - Wi... | | Y | 1 | 1.5 | 2 | 1.5 | 3 | 1.5 | 8 | 2.5 | | |
| 6 | NESC 250C_X-dir - Wi... | | Y | 1 | 1 | 2 | 1 | 9 | 1 | | | | |

Member Point Loads (BLC 2 : Weight of Equipment)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | Y | -101 | 52 |
| 2 | M2 | Y | -66 | 52 |
| 3 | M2 | Y | 0 | 52 |
| 4 | M2 | Y | 0 | 52 |
| 5 | M2 | Y | -122.1 | 52 |
| 6 | M2 | Y | 0 | 52 |
| 7 | M2 | Y | 0 | 52 |
| 8 | M2 | Y | 0 | 52 |
| 9 | M2 | Y | 0 | 52 |
| 10 | M2 | Y | 0 | 52 |
| 11 | M2 | Y | -101 | 42 |
| 12 | M2 | Y | -66 | 42 |
| 13 | M2 | Y | 0 | 42 |
| 14 | M2 | Y | 0 | 42 |
| 15 | M2 | Y | -105 | 42 |
| 16 | M2 | Y | -48 | 42 |
| 17 | M2 | Y | 0 | 42 |
| 18 | M2 | Y | 0 | 42 |



Member Point Loads (BLC 2 : Weight of Equipment) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 19 | M2 | Y | 0 | 42 |
| 20 | M2 | Y | 0 | 42 |

Member Point Loads (BLC 3 : Weight of Ice on Mast and Equip.)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | Y | -150 | 52 |
| 2 | M2 | Y | -97 | 52 |
| 3 | M2 | Y | 0 | 52 |
| 4 | M2 | Y | 0 | 52 |
| 5 | M2 | Y | -100.6 | 52 |
| 6 | M2 | Y | 0 | 52 |
| 7 | M2 | Y | 0 | 52 |
| 8 | M2 | Y | 0 | 52 |
| 9 | M2 | Y | 0 | 52 |
| 10 | M2 | Y | 0 | 52 |
| 11 | M2 | Y | -150 | 42 |
| 12 | M2 | Y | -97 | 42 |
| 13 | M2 | Y | 0 | 42 |
| 14 | M2 | Y | 0 | 42 |
| 15 | M2 | Y | -99.7 | 42 |
| 16 | M2 | Y | -17.7 | 42 |
| 17 | M2 | Y | 0 | 42 |
| 18 | M2 | Y | 0 | 42 |
| 19 | M2 | Y | 0 | 42 |
| 20 | M2 | Y | 0 | 42 |

Member Point Loads (BLC 4 : TIA X-dir - Wind w/ Ice)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | X | 147.5 | 52 |
| 2 | M2 | X | 0 | 52 |
| 3 | M2 | X | 0 | 52 |
| 4 | M2 | X | 0 | 52 |
| 5 | M2 | X | 676.9 | 52 |
| 6 | M2 | X | 0 | 52 |
| 7 | M2 | X | 0 | 52 |
| 8 | M2 | X | 0 | 52 |
| 9 | M2 | X | 0 | 52 |
| 10 | M2 | X | 0 | 52 |
| 11 | M2 | X | 143.7 | 42 |
| 12 | M2 | X | 0 | 42 |
| 13 | M2 | X | 0 | 42 |
| 14 | M2 | X | 0 | 42 |
| 15 | M2 | X | 556.2 | 42 |
| 16 | M2 | X | 69.5 | 42 |
| 17 | M2 | X | 0 | 42 |
| 18 | M2 | X | 0 | 42 |
| 19 | M2 | X | 0 | 42 |
| 20 | M2 | X | 0 | 42 |

Member Point Loads (BLC 5 : TIA X-dir - Wind w/o Ice)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|---|--------------|-----------|--------------------|----------------|
| 1 | M2 | X | 138.4 | 52 |
| 2 | M2 | X | 0 | 52 |
| 3 | M2 | X | 0 | 52 |
| 4 | M2 | X | 0 | 52 |



Member Point Loads (BLC 5 : TIA X-dir - Wind w/o Ice) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 5 | M2 | X | 814.7 | 52 |
| 6 | M2 | X | 0 | 52 |
| 7 | M2 | X | 0 | 52 |
| 8 | M2 | X | 0 | 52 |
| 9 | M2 | X | 0 | 52 |
| 10 | M2 | X | 0 | 52 |
| 11 | M2 | X | 134.8 | 42 |
| 12 | M2 | X | 0 | 42 |
| 13 | M2 | X | 0 | 42 |
| 14 | M2 | X | 0 | 42 |
| 15 | M2 | X | 660.7 | 42 |
| 16 | M2 | X | 72.4 | 42 |
| 17 | M2 | X | 0 | 42 |
| 18 | M2 | X | 0 | 42 |
| 19 | M2 | X | 0 | 42 |
| 20 | M2 | X | 0 | 42 |

Member Point Loads (BLC 6 : TIA Z-dir - Wind w/ Ice)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | Z | 147.5 | 52 |
| 2 | M2 | Z | 0 | 52 |
| 3 | M2 | Z | 0 | 52 |
| 4 | M2 | Z | 0 | 52 |
| 5 | M2 | Z | 676.9 | 52 |
| 6 | M2 | Z | 0 | 52 |
| 7 | M2 | Z | 0 | 52 |
| 8 | M2 | Z | 0 | 52 |
| 9 | M2 | Z | 0 | 52 |
| 10 | M2 | Z | 0 | 52 |
| 11 | M2 | Z | 143.7 | 42 |
| 12 | M2 | Z | 0 | 42 |
| 13 | M2 | Z | 0 | 42 |
| 14 | M2 | Z | 0 | 42 |
| 15 | M2 | Z | 556.2 | 42 |
| 16 | M2 | Z | 69.5 | 42 |
| 17 | M2 | Z | 0 | 42 |
| 18 | M2 | Z | 0 | 42 |
| 19 | M2 | Z | 0 | 42 |
| 20 | M2 | Z | 0 | 42 |

Member Point Loads (BLC 7 : TIA Z-dir - Wind w/o Ice)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | Z | 138.4 | 52 |
| 2 | M2 | Z | 0 | 52 |
| 3 | M2 | Z | 0 | 52 |
| 4 | M2 | Z | 0 | 52 |
| 5 | M2 | Z | 814.7 | 52 |
| 6 | M2 | Z | 0 | 52 |
| 7 | M2 | Z | 0 | 52 |
| 8 | M2 | Z | 0 | 52 |
| 9 | M2 | Z | 0 | 52 |
| 10 | M2 | Z | 0 | 52 |
| 11 | M2 | Z | 134.8 | 42 |
| 12 | M2 | Z | 0 | 42 |
| 13 | M2 | Z | 0 | 42 |
| 14 | M2 | Z | 0 | 42 |



Member Point Loads (BLC 7 : TIA Z-dir - Wind w/o Ice) (Continued)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 15 | M2 | Z | 660.7 | 42 |
| 16 | M2 | Z | 72.4 | 42 |
| 17 | M2 | Z | 0 | 42 |
| 18 | M2 | Z | 0 | 42 |
| 19 | M2 | Z | 0 | 42 |
| 20 | M2 | Z | 0 | 42 |

Member Point Loads (BLC 8 : NESC 250B X-dir - Wind w/ Ice)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | X | 27 | 52 |
| 2 | M2 | X | 0 | 52 |
| 3 | M2 | X | 0 | 52 |
| 4 | M2 | X | 0 | 52 |
| 5 | M2 | X | 106.1 | 52 |
| 6 | M2 | X | 0 | 52 |
| 7 | M2 | X | 0 | 52 |
| 8 | M2 | X | 0 | 52 |
| 9 | M2 | X | 0 | 52 |
| 10 | M2 | X | 0 | 52 |
| 11 | M2 | X | 27 | 42 |
| 12 | M2 | X | 0 | 42 |
| 13 | M2 | X | 0 | 42 |
| 14 | M2 | X | 0 | 42 |
| 15 | M2 | X | 89.5 | 42 |
| 16 | M2 | X | 11.2 | 42 |
| 17 | M2 | X | 0 | 42 |
| 18 | M2 | X | 0 | 42 |
| 19 | M2 | X | 0 | 42 |
| 20 | M2 | X | 0 | 42 |

Member Point Loads (BLC 9 : NESC 250C X-dir - Wind w/o Ice)

| | Member Label | Direction | Magnitude[lb.k-ft] | Location[ft.%] |
|----|--------------|-----------|--------------------|----------------|
| 1 | M2 | X | 208.5 | 52 |
| 2 | M2 | X | 0 | 52 |
| 3 | M2 | X | 0 | 52 |
| 4 | M2 | X | 0 | 52 |
| 5 | M2 | X | 1052.3 | 52 |
| 6 | M2 | X | 0 | 52 |
| 7 | M2 | X | 0 | 52 |
| 8 | M2 | X | 0 | 52 |
| 9 | M2 | X | 0 | 52 |
| 10 | M2 | X | 0 | 52 |
| 11 | M2 | X | 208.5 | 42 |
| 12 | M2 | X | 0 | 42 |
| 13 | M2 | X | 0 | 42 |
| 14 | M2 | X | 0 | 42 |
| 15 | M2 | X | 876.1 | 42 |
| 16 | M2 | X | 96 | 42 |
| 17 | M2 | X | 0 | 42 |
| 18 | M2 | X | 0 | 42 |
| 19 | M2 | X | 0 | 42 |
| 20 | M2 | X | 0 | 42 |



Member Distributed Loads (BLC 2 : Weight of Equipment)

| | Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|----|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | Y | -6 | -6 | 23 | 52 |
| 2 | M2 | Y | 0 | 0 | 23 | 52 |
| 3 | M2 | Y | 0 | 0 | 23 | 52 |
| 4 | M2 | Y | 0 | 0 | 23 | 52 |
| 5 | M2 | Y | 0 | 0 | 23 | 52 |
| 6 | M2 | Y | 0 | 0 | 23 | 52 |
| 7 | M2 | Y | -3 | -3 | 23 | 42 |
| 8 | M2 | Y | 0 | 0 | 23 | 42 |
| 9 | M2 | Y | 0 | 0 | 23 | 42 |
| 10 | M2 | Y | 0 | 0 | 23 | 42 |
| 11 | M2 | Y | 0 | 0 | 23 | 42 |
| 12 | M2 | Y | 0 | 0 | 23 | 42 |

Member Distributed Loads (BLC 3 : Weight of Ice on Mast and Equip.)

| | Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|----|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | Y | -8.2 | -8.2 | 0 | 0 |
| 2 | M2 | Y | -14.8 | -14.8 | 23 | 52 |
| 3 | M2 | Y | 0 | 0 | 23 | 52 |
| 4 | M2 | Y | 0 | 0 | 23 | 52 |
| 5 | M2 | Y | 0 | 0 | 23 | 52 |
| 6 | M2 | Y | 0 | 0 | 23 | 52 |
| 7 | M2 | Y | 0 | 0 | 23 | 52 |
| 8 | M4 | Y | -5.1 | -5.1 | 0 | 0 |
| 9 | M7 | Y | -5.1 | -5.1 | 0 | 0 |
| 10 | M9 | Y | -5.1 | -5.1 | 0 | 0 |
| 11 | M10 | Y | -5.1 | -5.1 | 0 | 0 |
| 12 | M4 | Y | 0 | 0 | 0 | 0 |
| 13 | M4 | Y | 0 | 0 | 0 | 0 |
| 14 | M2 | Y | 0 | 0 | 0 | 0 |
| 15 | M2 | Y | -7.4 | -7.4 | 23 | 42 |

Member Distributed Loads (BLC 4 : TIA X-dir - Wind w/ Ice)

| | Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|----|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | PX | 37.5 | 37.5 | 0 | 0 |
| 2 | M2 | PX | 26.9 | 26.9 | 23 | 52 |
| 3 | M2 | PX | 0 | 0 | 23 | 52 |
| 4 | M2 | PX | 0 | 0 | 23 | 52 |
| 5 | M2 | PX | 0 | 0 | 23 | 52 |
| 6 | M2 | PX | 0 | 0 | 23 | 52 |
| 7 | M2 | PX | 0 | 0 | 23 | 52 |
| 8 | M4 | PX | 26 | 26 | 0 | 0 |
| 9 | M7 | PX | 26 | 26 | 0 | 0 |
| 10 | M9 | PX | 22.3 | 22.3 | 0 | 0 |
| 11 | M10 | PX | 22.3 | 22.3 | 0 | 0 |
| 12 | M4 | PX | 0 | 0 | 0 | 0 |
| 13 | M4 | PX | 0 | 0 | 0 | 0 |
| 14 | M2 | PX | 0 | 0 | 0 | 0 |
| 15 | M2 | PX | 14.8 | 14.8 | 23 | 42 |

Member Distributed Loads (BLC 5 : TIA X-dir - Wind w/o Ice)

| | Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|---|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | PX | 45.9 | 45.9 | 0 | 0 |
| 2 | M2 | PX | 32 | 32 | 23 | 52 |
| 3 | M2 | PX | 0 | 0 | 23 | 52 |



Member Distributed Loads (BLC 5 : TIA X-dir - Wind w/o Ice) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 4 | M2 | PX | 0 | 23 | 52 |
| 5 | M2 | PX | 0 | 23 | 52 |
| 6 | M2 | PX | 0 | 23 | 52 |
| 7 | M2 | PX | 0 | 23 | 52 |
| 8 | M4 | PX | 29.4 | 0 | 0 |
| 9 | M7 | PX | 29.4 | 0 | 0 |
| 10 | M9 | PX | 25.2 | 0 | 0 |
| 11 | M10 | PX | 25.2 | 0 | 0 |
| 12 | M4 | PX | 0 | 0 | 0 |
| 13 | M4 | PX | 0 | 0 | 0 |
| 14 | M2 | PX | 0 | 0 | 0 |
| 15 | M2 | PX | 16 | 23 | 42 |

Member Distributed Loads (BLC 6 : TIA Z-dir - Wind w/ Ice)

| Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | PZ | 37.5 | 0 | 0 |
| 2 | M2 | PZ | 26.9 | 23 | 52 |
| 3 | M2 | PZ | 0 | 23 | 52 |
| 4 | M2 | PZ | 0 | 23 | 52 |
| 5 | M2 | PZ | 0 | 23 | 52 |
| 6 | M2 | PZ | 0 | 23 | 52 |
| 7 | M2 | PZ | 0 | 23 | 52 |
| 8 | M4 | PZ | 26 | 0 | 0 |
| 9 | M7 | PZ | 26 | 0 | 0 |
| 10 | M9 | PZ | 22.3 | 0 | 0 |
| 11 | M10 | PZ | 22.3 | 0 | 0 |
| 12 | M4 | PZ | 0 | 0 | 0 |
| 13 | M4 | PZ | 0 | 0 | 0 |
| 14 | M2 | PZ | 0 | 0 | 0 |
| 15 | M2 | PZ | 14.8 | 23 | 42 |

Member Distributed Loads (BLC 7 : TIA Z-dir - Wind w/o Ice)

| Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | PZ | 45.9 | 0 | 0 |
| 2 | M2 | PZ | 32 | 23 | 52 |
| 3 | M2 | PZ | 0 | 23 | 52 |
| 4 | M2 | PZ | 0 | 23 | 52 |
| 5 | M2 | PZ | 0 | 23 | 52 |
| 6 | M2 | PZ | 0 | 23 | 52 |
| 7 | M2 | PZ | 0 | 23 | 52 |
| 8 | M4 | PZ | 29.4 | 0 | 0 |
| 9 | M7 | PZ | 29.4 | 0 | 0 |
| 10 | M9 | PZ | 25.2 | 0 | 0 |
| 11 | M10 | PZ | 25.2 | 0 | 0 |
| 12 | M4 | PZ | 0 | 0 | 0 |
| 13 | M4 | PZ | 0 | 0 | 0 |
| 14 | M2 | PZ | 0 | 0 | 0 |
| 15 | M2 | PZ | 16 | 23 | 42 |

Member Distributed Loads (BLC 8 : NESC 250B X-dir - Wind w/ Ice)

| Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | PX | 5.9 | 0 | 0 |
| 2 | M2 | PX | 4.8 | 23 | 52 |
| 3 | M2 | PX | 0 | 23 | 52 |
| 4 | M2 | PX | 0 | 23 | 52 |



Member Distributed Loads (BLC 8 : NESC 250B X-dir - Wind w/ Ice) (Continued)

| Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 5 | M2 | PX | 0 | 23 | 52 |
| 6 | M2 | PX | 0 | 23 | 52 |
| 7 | M2 | PX | 0 | 23 | 52 |
| 8 | M4 | PX | 3.2 | 0 | 0 |
| 9 | M7 | PX | 3.2 | 0 | 0 |
| 10 | M9 | PX | 3.2 | 0 | 0 |
| 11 | M10 | PX | 3.2 | 0 | 0 |
| 12 | M4 | PX | 0 | 0 | 0 |
| 13 | M4 | PX | 0 | 0 | 0 |
| 14 | M2 | PX | 0 | 0 | 0 |
| 15 | M2 | PX | 2.6 | 23 | 42 |

Member Distributed Loads (BLC 9 : NESC 250C X-dir - Wind w/o Ice)

| Member Label | Direction | Start Magnitude[lb/ft.F] | End Magnitude[lb/ft.F] | Start Location[ft.%] | End Location[ft.%] |
|--------------|-----------|--------------------------|------------------------|----------------------|--------------------|
| 1 | M2 | PX | 60 | 32 | 55 |
| 2 | M2 | PX | 46.6 | 32 | 52 |
| 3 | M2 | PX | 0 | 32 | 52 |
| 4 | M2 | PX | 0 | 32 | 52 |
| 5 | M2 | PX | 0 | 32 | 52 |
| 6 | M2 | PX | 0 | 32 | 52 |
| 7 | M2 | PX | 0 | 32 | 52 |
| 8 | M2 | PX | 48 | 0 | 32 |
| 9 | M2 | PX | 37.3 | 23 | 32 |
| 10 | M2 | PX | 0 | 23 | 32 |
| 11 | M2 | PX | 0 | 23 | 32 |
| 12 | M2 | PX | 0 | 23 | 32 |
| 13 | M2 | PX | 0 | 23 | 32 |
| 14 | M2 | PX | 0 | 23 | 32 |
| 15 | M4 | PX | 27.8 | 0 | 0 |
| 16 | M7 | PX | 27.8 | 0 | 0 |
| 17 | M9 | PX | 27.8 | 0 | 0 |
| 18 | M10 | PX | 27.8 | 0 | 0 |
| 19 | M4 | PX | 0 | 0 | 0 |
| 20 | M4 | PX | 0 | 0 | 0 |
| 21 | M2 | PX | 0 | 32 | 55 |
| 22 | M2 | PX | 23.3 | 32 | 42 |
| 23 | M2 | PX | 0 | 32 | 42 |
| 24 | M2 | PX | 0 | 32 | 42 |
| 25 | M2 | PX | 0 | 32 | 42 |
| 26 | M2 | PX | 0 | 32 | 42 |
| 27 | M2 | PX | 0 | 32 | 42 |
| 28 | M2 | PX | 0 | 0 | 32 |
| 29 | M2 | PX | 18.6 | 23 | 32 |

Envelope Member Section Forces

| Member | Sec | Axial[lb] | LC | y Shear[lb] | LC | z Shear[lb] | LC | Torque[k-...] | LC | y-y Moment... | LC | z-z Mome... | LC | |
|--------|-----|-----------|----------------|-------------|-----------|-------------|-----------|---------------|--------|---------------|--------|-------------|--------|---|
| 1 | M2 | 1 | m...3025.226 | 3 | 536.537 | 3 | 3264.594 | 4 | -0.13 | 1 | -0.381 | 1 | 5.719 | 3 |
| 2 | | | m...-2878.5... | 2 | -3398.047 | 2 | 34.953 | 1 | -2.225 | 4 | -6.186 | 4 | -5.148 | 2 |
| 3 | | 2 | m...2036.367 | 3 | 536.537 | 3 | 3895.719 | 4 | -0.13 | 1 | 43.042 | 4 | 45.914 | 2 |
| 4 | | | m...-3754.6... | 2 | -4029.172 | 2 | 34.953 | 1 | -2.225 | 4 | .1 | 1 | -1.659 | 3 |
| 5 | | 3 | m...3959.218 | 1 | 4137.264 | 2 | .672 | 1 | 0 | 1 | 65.304 | 4 | 65.341 | 2 |
| 6 | | | m...2551.818 | 2 | -2.286 | 3 | -4134.75 | 4 | 0 | 1 | -.01 | 1 | -.034 | 3 |
| 7 | | 4 | m...2541.359 | 3 | 2833.313 | 2 | .29 | 1 | 0 | 1 | 17.421 | 4 | 17.436 | 2 |
| 8 | | | m...1551.959 | 4 | -.987 | 3 | -2832.253 | 4 | 0 | 1 | -.004 | 1 | -.014 | 3 |
| 9 | | 5 | m... 0 | 1 | 33.902 | 1 | .29 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |

Envelope Member Section Forces (Continued)

| Member | Sec | Axial[lb] | LC | y Shear[lb] | LC | z Shear[lb] | LC | Torque[k-...] | LC | y-y Moment... | LC | z-z Mome... | LC | |
|--------|-----|-----------|---------------|-------------|-----------|-------------|-----------|---------------|--------|---------------|---------|-------------|---------|---|
| 10 | | 0 | 1 | -987 | 3 | -32.708 | 3 | 0 | 1 | 0 | 1 | 0 | 1 | |
| 11 | M3 | 1 | m..4598.367 | 2 | 3748.621 | 3 | 8875.611 | 4 | 0 | 1 | 0 | 1 | 0 | 1 |
| 12 | | | m..1443.224 | 3 | 3618.921 | 2 | 19.969 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| 13 | | 2 | m..4598.367 | 2 | 3745.044 | 3 | 8875.611 | 4 | 0 | 1 | 1.664 | 4 | -.678 | 2 |
| 14 | | | m..1443.224 | 3 | 3615.344 | 2 | 19.969 | 1 | 0 | 1 | .004 | 1 | -.703 | 3 |
| 15 | | 3 | m..4598.367 | 2 | 3741.467 | 3 | 8875.611 | 4 | 0 | 1 | 3.328 | 4 | -1.356 | 2 |
| 16 | | | m..1443.224 | 3 | 3611.767 | 2 | 19.969 | 1 | 0 | 1 | .007 | 1 | -1.404 | 3 |
| 17 | | 4 | m..4598.367 | 2 | 3737.889 | 3 | 8875.611 | 4 | 0 | 1 | 4.993 | 4 | -2.033 | 2 |
| 18 | | | m..1443.224 | 3 | 3608.19 | 2 | 19.969 | 1 | 0 | 1 | .011 | 1 | -2.106 | 3 |
| 19 | | 5 | m..4598.367 | 2 | 3734.312 | 3 | 8875.611 | 4 | 0 | 1 | 6.657 | 4 | -2.709 | 2 |
| 20 | | | m..1443.224 | 3 | 3604.612 | 2 | 19.969 | 1 | 0 | 1 | .015 | 1 | -2.806 | 3 |
| 21 | M4 | 1 | m..8869.744 | 4 | 3738.185 | 1 | -1435.147 | 3 | -2.709 | 2 | 6.657 | 4 | 0 | 1 |
| 22 | | | m..35.345 | 1 | 3617.39 | 4 | -4598.514 | 2 | -2.806 | 3 | .015 | 1 | 0 | 1 |
| 23 | | 2 | m..8869.744 | 4 | 3695.872 | 1 | -1435.147 | 3 | -2.709 | 2 | 3.496 | 4 | -6.301 | 4 |
| 24 | | | m..35.345 | 1 | 3584.002 | 4 | -4547.064 | 2 | -2.806 | 3 | -7.986 | 2 | -6.505 | 1 |
| 25 | | 3 | m..8869.744 | 4 | 3649.578 | 3 | 4477.388 | 2 | 2.885 | 1 | 7.702 | 4 | -12.544 | 4 |
| 26 | | | m..35.345 | 1 | -3763.452 | 1 | -1805.889 | 4 | -2.806 | 3 | -15.899 | 2 | -13.32 | 1 |
| 27 | | 4 | m... 0 | 1 | 1312.124 | 4 | 4528.838 | 2 | 2.885 | 1 | 3.849 | 4 | 2.267 | 4 |
| 28 | | | m... 0 | 1 | -3805.765 | 1 | -2201.329 | 4 | -.954 | 4 | -7.987 | 2 | -6.697 | 1 |
| 29 | | 5 | m... 0 | 1 | 1278.736 | 4 | 4580.288 | 2 | 2.885 | 1 | -.003 | 3 | 0 | 1 |
| 30 | | | m... 0 | 1 | -3848.077 | 1 | -2201.329 | 4 | -.954 | 4 | -.017 | 2 | 0 | 1 |
| 31 | M5 | 1 | m..4580.288 | 2 | 1278.78 | 4 | 22.201 | 2 | 0 | 1 | -.003 | 3 | .954 | 4 |
| 32 | | | m..-2201.3... | 4 | -3839.683 | 1 | 3.346 | 3 | 0 | 1 | -.017 | 2 | -2.885 | 1 |
| 33 | | 2 | m..4580.288 | 2 | 1275.202 | 4 | 22.201 | 2 | 0 | 1 | -.002 | 3 | .714 | 4 |
| 34 | | | m..-2201.3... | 4 | -3843.26 | 1 | 3.346 | 3 | 0 | 1 | -.012 | 2 | -2.165 | 1 |
| 35 | | 3 | m..4580.288 | 2 | 1271.625 | 4 | 22.201 | 2 | 0 | 1 | -.001 | 3 | .476 | 4 |
| 36 | | | m..-2201.3... | 4 | -3846.837 | 1 | 3.346 | 3 | 0 | 1 | -.008 | 2 | -1.444 | 1 |
| 37 | | 4 | m..4580.288 | 2 | 1268.048 | 4 | 22.201 | 2 | 0 | 1 | 0 | 3 | .237 | 4 |
| 38 | | | m..-2201.3... | 4 | -3850.414 | 1 | 3.346 | 3 | 0 | 1 | -.004 | 2 | -.722 | 1 |
| 39 | | 5 | m..4580.288 | 2 | 1264.471 | 4 | 22.201 | 2 | 0 | 1 | 0 | 1 | 0 | 1 |
| 40 | | | m..-2201.3... | 4 | -3853.992 | 1 | 3.346 | 3 | 0 | 1 | 0 | 1 | 0 | 1 |
| 41 | M6 | 1 | m..-193.42 | 3 | 866.405 | 3 | -37.109 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| 42 | | | m..-1603.9... | 2 | -1415.152 | 2 | -3237.198 | 4 | 0 | 1 | 0 | 1 | 0 | 1 |
| 43 | | 2 | m..-193.42 | 3 | 862.828 | 3 | -37.109 | 1 | 0 | 1 | -.007 | 1 | .266 | 2 |
| 44 | | | m..-1603.9... | 2 | -1418.729 | 2 | -3237.198 | 4 | 0 | 1 | -.607 | 4 | -.162 | 3 |
| 45 | | 3 | m..-193.42 | 3 | 859.25 | 3 | -37.109 | 1 | 0 | 1 | -.014 | 1 | .532 | 2 |
| 46 | | | m..-1603.9... | 2 | -1422.306 | 2 | -3237.198 | 4 | 0 | 1 | -1.214 | 4 | -.324 | 3 |
| 47 | | 4 | m..-193.42 | 3 | 855.673 | 3 | -37.109 | 1 | 0 | 1 | -.021 | 1 | .799 | 2 |
| 48 | | | m..-1603.9... | 2 | -1425.884 | 2 | -3237.198 | 4 | 0 | 1 | -1.821 | 4 | -.484 | 3 |
| 49 | | 5 | m..-193.42 | 3 | 852.096 | 3 | -37.109 | 1 | 0 | 1 | -.028 | 1 | 1.067 | 2 |
| 50 | | | m..-1603.9... | 2 | -1429.461 | 2 | -3237.198 | 4 | 0 | 1 | -2.428 | 4 | -.644 | 3 |
| 51 | M7 | 1 | m..-35.345 | 1 | 848.825 | 3 | 1603.863 | 2 | 1.067 | 2 | -.028 | 1 | 0 | 1 |
| 52 | | | m..-3237.6... | 4 | -1428.329 | 2 | 194.874 | 3 | -.644 | 3 | -2.428 | 4 | 0 | 1 |
| 53 | | 2 | m..-35.345 | 1 | 806.513 | 3 | 1655.313 | 2 | 1.067 | 2 | 2.817 | 2 | 2.529 | 2 |
| 54 | | | m..-3237.6... | 4 | -1461.717 | 2 | 194.874 | 3 | -.644 | 3 | -1.833 | 4 | -1.448 | 3 |
| 55 | | 3 | m..-35.345 | 1 | -.698.02 | 1 | 1706.763 | 2 | 1.783 | 3 | 5.759 | 2 | 5.116 | 2 |
| 56 | | | m..-3237.6... | 4 | -2283.55 | 3 | 723.679 | 4 | .456 | 1 | -2.557 | 3 | -8.141 | 3 |
| 57 | | 4 | m... 0 | 1 | 1329.341 | 2 | 730.539 | 3 | 1.783 | 3 | 2.818 | 2 | 2.297 | 2 |
| 58 | | | m... 0 | 1 | -2325.863 | 3 | -1637.089 | 2 | -.968 | 2 | -1.279 | 3 | -4.107 | 3 |
| 59 | | 5 | m... 0 | 1 | 1295.953 | 2 | 730.539 | 3 | 1.783 | 3 | 0 | 4 | 0 | 1 |
| 60 | | | m... 0 | 1 | -2368.176 | 3 | -1585.639 | 2 | -.968 | 2 | -.002 | 2 | 0 | 1 |
| 61 | M8 | 1 | m..730.539 | 3 | 1297.199 | 2 | 2.731 | 2 | 0 | 1 | 0 | 4 | .968 | 2 |
| 62 | | | m..-1585.6... | 2 | -2370.555 | 3 | .536 | 4 | 0 | 1 | -.002 | 2 | -1.783 | 3 |
| 63 | | 2 | m..730.539 | 3 | 1293.621 | 2 | 2.731 | 2 | 0 | 1 | 0 | 4 | .725 | 2 |
| 64 | | | m..-1585.6... | 2 | -2374.132 | 3 | .536 | 4 | 0 | 1 | -.002 | 2 | -1.338 | 3 |
| 65 | | 3 | m..730.539 | 3 | 1290.044 | 2 | 2.731 | 2 | 0 | 1 | 0 | 4 | .482 | 2 |
| 66 | | | m..-1585.6... | 2 | -2377.709 | 3 | .536 | 4 | 0 | 1 | -.001 | 2 | -.893 | 3 |



Envelope Member Section Forces (Continued)

| Member | Sec | Axial[lb] | LC | y Shear[lb] | LC | z Shear[lb] | LC | Torque[k-... | LC | y-y Moment... | LC | z-z Mome... | LC | |
|--------|-----|----------------|--------------|-------------|----------|-------------|----------|--------------|--------|---------------|-------|-------------|--------|---|
| 67 | 4 | m...730.539 | 3 | 1286.467 | 2 | 2.731 | 2 | 0 | 1 | 0 | 4 | .241 | 2 | |
| 68 | | m...-1585.6... | 2 | -2381.287 | 3 | .536 | 4 | 0 | 1 | 0 | 2 | -.447 | 3 | |
| 69 | 5 | m...730.539 | 3 | 1282.89 | 2 | 2.731 | 2 | 0 | 1 | 0 | 1 | 0 | 1 | |
| 70 | | m...-1585.6... | 2 | -2384.864 | 3 | .536 | 4 | 0 | 1 | 0 | 1 | 0 | 1 | |
| 71 | M9 | 1 | m...8972.855 | 2 | 7373.387 | 1 | 8869.279 | 4 | 17.136 | 4 | -.025 | 1 | -1.767 | 4 |
| 72 | | m...-537.119 | 3 | 2200.973 | 4 | 35.375 | 1 | -.466 | 2 | -7.365 | 4 | -5.687 | 1 | |
| 73 | 2 | m...8972.855 | 2 | 7366.841 | 1 | 8862.456 | 4 | 17.136 | 4 | -.016 | 1 | -2.363 | 4 | |
| 74 | | m...-537.119 | 3 | 2195.808 | 4 | 35.375 | 1 | -.466 | 2 | -4.965 | 4 | -7.683 | 1 | |
| 75 | 3 | m...8972.855 | 2 | 7360.294 | 1 | 8855.633 | 4 | 17.136 | 4 | -.006 | 1 | -2.956 | 4 | |
| 76 | | m...-537.119 | 3 | 2190.642 | 4 | 35.375 | 1 | -.466 | 2 | -2.566 | 4 | -9.677 | 1 | |
| 77 | 4 | m...8972.855 | 2 | 7353.748 | 1 | 8848.81 | 4 | 17.136 | 4 | .004 | 2 | -3.549 | 4 | |
| 78 | | m...-537.119 | 3 | 2185.477 | 4 | 35.375 | 1 | -.466 | 2 | -.17 | 4 | -11.669 | 1 | |
| 79 | 5 | m...8972.855 | 2 | 7347.202 | 1 | 8841.987 | 4 | 17.136 | 4 | 2.225 | 4 | -4.14 | 4 | |
| 80 | | m...-537.119 | 3 | 2180.311 | 4 | 35.375 | 1 | -.466 | 2 | .013 | 1 | -13.659 | 1 | |
| 81 | M10 | 1 | m...537.119 | 3 | 3052.006 | 3 | -35.334 | 1 | -.381 | 1 | 1.296 | 4 | 2.034 | 2 |
| 82 | | m...-3395.3... | 2 | -2864.72 | 2 | -3237.723 | 4 | -6.186 | 4 | .025 | 1 | -2.428 | 3 | |
| 83 | 2 | m...537.119 | 3 | 3045.46 | 3 | -35.334 | 1 | -.381 | 1 | .419 | 4 | 2.811 | 2 | |
| 84 | | m...-3395.3... | 2 | -2869.885 | 2 | -3244.546 | 4 | -6.186 | 4 | .016 | 1 | -3.253 | 3 | |
| 85 | 3 | m...537.119 | 3 | 3038.913 | 3 | -35.334 | 1 | -.381 | 1 | .008 | 2 | 3.588 | 2 | |
| 86 | | m...-3395.3... | 2 | -2875.051 | 2 | -3251.369 | 4 | -6.186 | 4 | -.461 | 4 | -4.077 | 3 | |
| 87 | 4 | m...537.119 | 3 | 3032.367 | 3 | -35.334 | 1 | -.381 | 1 | -.003 | 1 | 4.367 | 2 | |
| 88 | | m...-3395.3... | 2 | -2880.216 | 2 | -3258.192 | 4 | -6.186 | 4 | -1.342 | 4 | -4.899 | 3 | |
| 89 | 5 | m...537.119 | 3 | 3025.82 | 3 | -35.334 | 1 | -.381 | 1 | -.013 | 1 | 5.148 | 2 | |
| 90 | | m...-3395.3... | 2 | -2885.382 | 2 | -3265.015 | 4 | -6.186 | 4 | -2.225 | 4 | -5.719 | 3 | |

Envelope AISC ASD Steel Code Checks

| Mem... | Shape | Code Ch... | Loc[ft] | LC | Shear Check | Loc[ft] | Dir | LC | Fa [ksi] | Ft [ksi] | Fb y-y [k... | Fb z-z [k... | Cb | Cmy | Cmz | ASD E... | |
|--------|-------|------------|---------|--------|-------------|---------|--------|----|----------|----------|--------------|--------------|--------|--------|------|----------|------|
| 1 | M2 | PIPE_12.0X | .674 | 21.771 | 2 | .039 | 21.198 | 4 | 8.832 | 27.93 | 30.723 | 30.723 | 1 | .6 | .85 | H1-2 | |
| 2 | M3 | HSS6x6x4 | .302 | .75 | 4 | .130 | 0 | z | 4 | 36.403 | 36.708 | 40.379 | 40.379 | 1.75 | .6 | .85 | H1-2 |
| 3 | M4 | HSS6x6x4 | .902 | 3.5 | 2 | .156 | 7 | z | 2 | 32.524 | 36.708 | 40.379 | 40.379 | 1 | .85 | .85 | H1-2 |
| 4 | M5 | HSS6x6x4 | .112 | 0 | 2 | .056 | .75 | y | 1 | 36.403 | 36.708 | 40.379 | 40.379 | 1.75 | .6 | .85 | H1-2 |
| 5 | M6 | HSS6x6x4 | .087 | .75 | 3 | .047 | 0 | z | 4 | 36.403 | 36.708 | 40.379 | 40.379 | 1.75 | .6 | .85 | H2-1 |
| 6 | M7 | HSS6x6x4 | .348 | 3.5 | 3 | .091 | 7 | y | 3 | 32.524 | 36.708 | 40.379 | 40.379 | 1 | .6 | .85 | H2-1 |
| 7 | M8 | HSS6x6x4 | .059 | 0 | 3 | .035 | .75 | y | 3 | 36.403 | 36.708 | 40.379 | 40.379 | 1.75 | .6 | .85 | H1-2 |
| 8 | M9 | HSS6x6x4 | .465 | 1.083 | 1 | .672 | 0 | z | 4 | 36.256 | 36.708 | 40.379 | 40.379 | 1.3... | .395 | .85 | H1-2 |
| 9 | M10 | HSS6x6x4 | .240 | 1.083 | 3 | .243 | 1.083 | z | 4 | 36.256 | 36.708 | 40.379 | 40.379 | 1.3... | .85 | .85 | H1-2 |


Envelope Joint Reactions



| Joint | X [lb] | LC | Y [lb] | LC | Z [lb] | LC | MX [k-ft] | LC | MY [k-ft] | LC | MZ [k-ft] | LC |
|-------|---------|-----|-----------|----|-----------|----|-----------|----|-----------|----|-----------|----|
| 1 | TM8 | max | 1585.639 | 2 | 2382.485 | 3 | 0 | 1 | 0 | 1 | 0 | 1 |
| 2 | | min | -730.539 | 3 | -1281.644 | 2 | 0 | 1 | 0 | 1 | 0 | 1 |
| 3 | TM7 | max | 1603.915 | 2 | 866.796 | 3 | 3237.661 | 4 | 0 | 1 | 0 | 1 |
| 4 | | min | 193.42 | 3 | -1414.064 | 2 | 35.345 | 1 | 0 | 1 | 0 | 1 |
| 5 | TM6 | max | 2201.329 | 4 | 3862.386 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| 6 | | min | -4580.288 | 2 | -1264.427 | 4 | 0 | 1 | 0 | 1 | 0 | 1 |
| 7 | TM5 | max | -1443.224 | 3 | 3752.394 | 1 | -35.345 | 1 | 0 | 1 | 0 | 1 |
| 8 | | min | -4598.367 | 2 | 3627.914 | 4 | -8869.744 | 4 | 0 | 1 | 0 | 1 |
| 9 | Totals: | max | 0 | 4 | 6525.445 | 3 | 0 | 2 | | | | |
| 10 | | min | -5989.1 | 2 | 4710.198 | 2 | -5632.083 | 4 | | | | |



Joint Reactions

| | LC | Joint Label | X [lb] | Y [lb] | Z [lb] | MX [k-ft] | MY [k-ft] | MZ [k-ft] |
|----|----|-------------|-----------|-----------|---------|-----------|-----------|-----------|
| 1 | 5 | TM8 | 249.861 | 1551.378 | 0 | 0 | 0 | 0 |
| 2 | 5 | TM7 | 254.176 | 1518.8 | 10.303 | 0 | 0 | 0 |
| 3 | 5 | TM6 | -1273.242 | 3375.542 | 0 | 0 | 0 | 0 |
| 4 | 5 | TM5 | -1277.545 | 3342.448 | -10.303 | 0 | 0 | 0 |
| 5 | 5 | Totals: | -2046.75 | 9788.167 | 0 | | | |
| 6 | 5 | COG (ft): | X: -1.76 | Y: 31.337 | Z: 0 | | | |
| 7 | 6 | TM8 | 2296.736 | -2139.884 | 0 | 0 | 0 | 0 |
| 8 | 6 | TM7 | 2321.605 | -2318.259 | 59.166 | 0 | 0 | 0 |
| 9 | 6 | TM6 | -6004.267 | 4673.934 | 0 | 0 | 0 | 0 |
| 10 | 6 | TM5 | -6028.775 | 4494.406 | -59.166 | 0 | 0 | 0 |
| 11 | 6 | Totals: | -7414.7 | 4710.198 | 0 | | | |
| 12 | 6 | COG (ft): | X: -1.749 | Y: 29.118 | Z: 0 | | | |

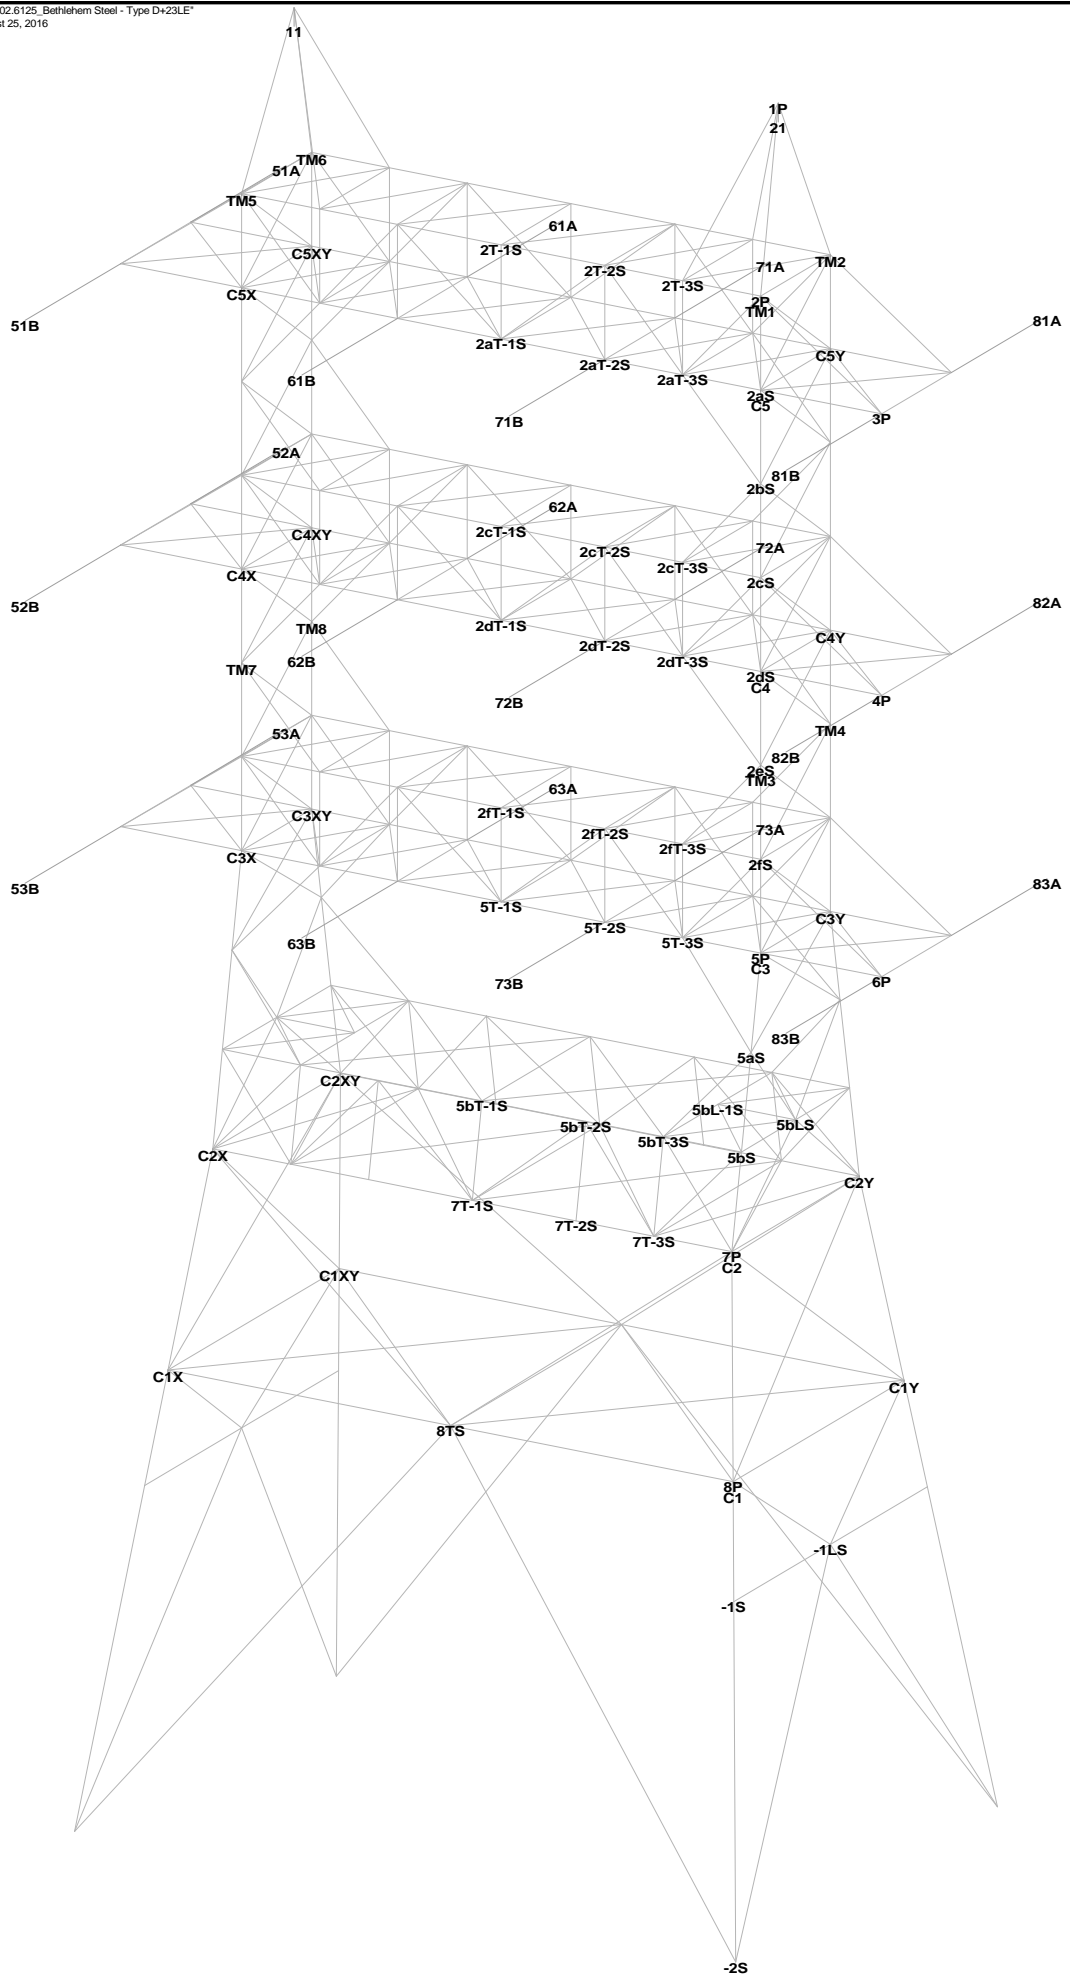

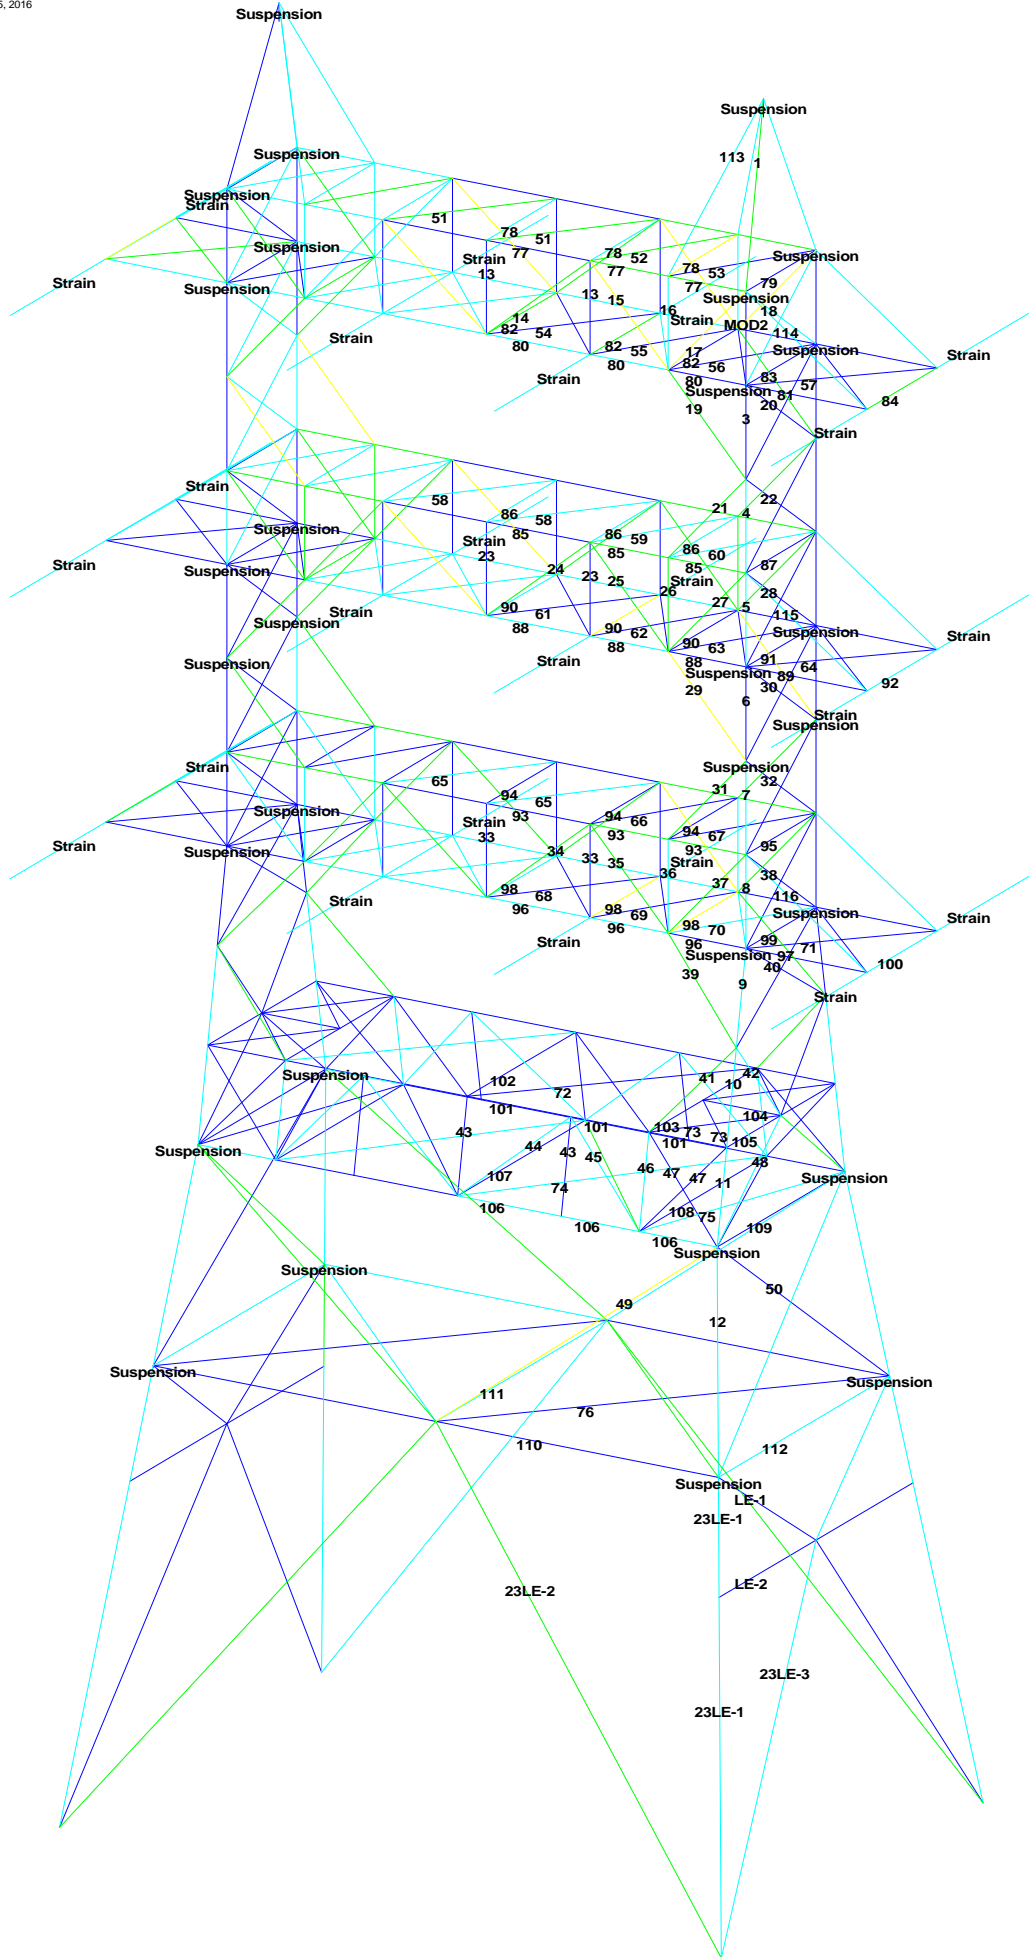

Project Name : Eversource; 104'-0" Bethlehem Steel - Type D+33LE
 Project Notes : Based on erection drawing CE 4324-C, Sheets E5 & E6; w/ PJF 2016 MODS
 Project File : G:\Transmission\Eversource\2016\312-T-Mobile\31216-0025 TMobile_CTI1356C_CLIP 1102_2 Willruss St\31216-0025.002.6125_6000_6050_6090\31216-0025.002.6125
 Bethlehem Steel - Type D+33LE.tow
 Date run : 2:20:56 PM Thursday, August 25, 2016
 By : Tower Version 14.20
 Licensed to : Paul J. Ford and Company

Successfully performed nonlinear analysis

Member check option: ASCE 10
 Connection rupture check: Not Checked
 Crossing diagonal check: ASCE 10 [Alternate Unsupported RLOUT = 1]
 Included angle check: None
 Climbing load check: None
 Redundant members checked with: Actual Force

Loads from file: g:\transmission\eversource\2016\312-t-mobile\31216-0025 tmobile_ct11356c_clip 1102_2 willruss st\31216-0025.002.6125_6000_6050_6090\31216-0025.002.6125-

*** Analysis Results:

Maximum element usage is 89.40% for Angle "54P" in load case "TCL Broken: 250B"
 Maximum insulator usage is 39.40% for Strain "51A" in load case "250B: NESC Heavy"

Summary of Joint Support Reactions For All Load Cases:

| Load Case | Joint Label | Long. | | Trans. | | Shear Force | | Trans. Moment | | Long. Bending Moment | | Vert. Found. Usage | |
|-----------------------------|-------------|--------|--------|---------|--------|-------------|--------|---------------|--------|----------------------|--------|--------------------|------|
| | | (kips) | (kips) | (kips) | (kips) | (ft-k) | (ft-k) | (ft-k) | (ft-k) | (ft-k) | (ft-k) | % | % |
| 250B: NESC Heavy | -2S | -24.03 | -33.04 | -123.55 | 40.85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 250B: NESC Heavy | -2X | 13.95 | -20.62 | 64.06 | 24.89 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 250B: NESC Heavy | -2Y | -12.50 | -18.63 | 59.46 | 22.44 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 250B: NESC Heavy | -2S | 22.58 | -30.79 | -117.82 | 38.18 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 250C: Extreme Wind (Trans.) | -2S | -22.53 | -32.99 | -117.55 | 39.95 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 250C: Extreme Wind (Trans.) | -2X | 18.75 | -26.69 | 88.10 | 32.62 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 250C: Extreme Wind (Trans.) | -2Y | -18.67 | -26.59 | 88.00 | 32.49 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| SWL Broken: 250B | -2Y | 22.45 | -32.86 | -117.22 | 39.80 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| SWL Broken: 250B | -2S | -24.85 | -36.90 | -130.93 | 44.48 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| SWL Broken: 250B | -2X | 12.10 | -19.43 | 49.83 | 22.89 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| SWL Broken: 250B | -2Y | -13.46 | -18.89 | 69.53 | 23.20 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| SWL Broken: 250B | -2S | 20.10 | -25.95 | -105.67 | 32.83 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| SWR Broken: 250B | -2S | -26.95 | -36.59 | -144.89 | 45.44 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| SWR Broken: 250B | -2X | 12.67 | -16.09 | 51.21 | 20.47 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| SWR Broken: 250B | -2Y | -12.28 | -21.69 | 65.47 | 24.92 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| SWR Broken: 250B | -2Y | 16.91 | -25.89 | -88.83 | 30.92 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| TCL Broken: 250B | -2S | -14.75 | -11.70 | -101.90 | 18.83 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| TCL Broken: 250B | -2X | 1.49 | -24.50 | 8.58 | 24.55 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| TCL Broken: 250B | -2XY | -23.26 | -29.53 | 109.61 | 37.59 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| TCL Broken: 250B | -2Y | 25.27 | -34.03 | -132.67 | 42.39 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

Summary of Joint Support Reactions For All Load Cases in Direction of Leg:

| Load Case | Support Joint Label | Leg Force | | In Residual Shear | | Residual Shear | | Horizontal | | Total | |
|-----------------------------|---------------------|-----------|--------|-------------------|--------|----------------|--------|------------|--------|--------|---------|
| | | Dir. | (kips) | Horizontal | (kips) | To Leg | To Leg | (kips) | (kips) | (kips) | (kips) |
| 250B: NESC Heavy | -2S | -1S | 157P | 128.821 | 18.377 | 18.506 | 0.273 | 18.504 | -24.03 | -33.04 | -123.55 |
| 250B: NESC Heavy | -2X | -1X | 157X | -67.478 | 13.059 | 13.184 | -1.633 | 13.082 | 13.95 | -20.62 | 64.06 |
| 250B: NESC Heavy | -2Y | -1Y | 157Y | -62.492 | 11.588 | 11.689 | 1.068 | 11.640 | -12.50 | -18.63 | 59.46 |
| 250B: NESC Heavy | -2S | -1S | 157P | 122.709 | 16.821 | 16.931 | 0.076 | 16.931 | 22.58 | -30.79 | -117.82 |
| 250C: Extreme Wind (Trans.) | -2S | -1S | 157P | 122.682 | 19.043 | 19.168 | -0.071 | 19.168 | -22.53 | -32.99 | -117.55 |
| 250C: Extreme Wind (Trans.) | -2X | -1X | 157X | -62.527 | 16.275 | 16.425 | -1.810 | 16.325 | 18.75 | -26.69 | 88.10 |
| 250C: Extreme Wind (Trans.) | -2Y | -1Y | 157Y | -62.395 | 16.885 | 16.933 | 1.752 | 16.239 | -18.67 | -26.59 | 88.00 |
| 250C: Extreme Wind (Trans.) | -2Y | -1Y | 157Y | 122.328 | 18.953 | 19.077 | 0.086 | 19.077 | 22.45 | -32.86 | -117.22 |
| SWL Broken: 250B | -2X | -1X | 157X | 136.615 | 21.364 | 21.499 | -2.514 | 21.497 | -24.85 | -36.90 | -130.93 |
| SWL Broken: 250B | -2X | -1X | 157X | -53.113 | 13.650 | 13.800 | 0.089 | 13.569 | 12.10 | -19.43 | 49.83 |
| SWL Broken: 250B | -2Y | -1Y | 157Y | -72.525 | 13.442 | 13.525 | 0.215 | 13.523 | 20.10 | -25.95 | -105.67 |
| SWR Broken: 250B | -2S | -1S | 157P | 109.833 | 13.440 | 13.525 | -0.913 | 13.523 | 20.10 | -25.95 | -105.67 |
| SWR Broken: 250B | -2X | -1X | 157X | 150.597 | 19.457 | 19.567 | -0.819 | 19.545 | -26.95 | -36.59 | -144.89 |
| SWR Broken: 250B | -2X | -1X | 157X | -54.180 | 10.314 | 10.450 | -0.311 | 10.063 | 12.67 | -16.09 | 51.21 |
| SWR Broken: 250B | -2Y | -1Y | 157Y | 92.799 | 15.344 | 15.442 | 0.168 | 13.989 | -12.28 | -21.69 | 65.47 |
| TCL Broken: 250B | -2S | -1S | 157P | 103.519 | 4.759 | 4.851 | -4.843 | 15.441 | 16.91 | -25.89 | -88.83 |
| TCL Broken: 250B | -2X | -1X | 157X | -11.462 | 23.343 | 23.494 | 0.160 | -0.283 | -14.75 | -11.70 | -101.90 |
| TCL Broken: 250B | -2Y | -1Y | 157Y | -114.684 | 16.621 | 16.782 | 2.186 | 16.639 | -23.26 | -29.53 | 109.61 |
| TCL Broken: 250B | -2Y | -1Y | 157Y | 138.072 | 18.309 | 18.426 | 0.239 | 18.424 | 25.27 | -34.03 | -132.67 |

Overturning Moment Summary For All Load Cases:

250C: Extreme Wind (Trans.) 86.92 130P Angle
 89.18 15X Angle
 SWL Broken: 250B 86.37 130P Angle
 SWL Broken: 250B 88.79 15X Angle
 TCL Broken: 250B 89.40 54P Angle

Summary of Insulator Usages:

| Insulator Label | Insulator Maximum Type Usage % | Load Case Weight (lbs) |
|-----------------|-----------------------------------|------------------------|
| 51A Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 51B Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 52A Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 52B Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 53A Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 53B Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 61A Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 61B Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 62A Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 62B Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 63A Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 63B Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 71A Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 71B Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 72A Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 72B Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 73A Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 73B Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 81A Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 81B Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 82A Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 82B Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 83A Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 83B Strain | 39.40 | 250B: NESC Heavy 40.0 |
| 11 Suspension | 12.86 | SWL Broken: 250B 10.0 |
| 21 Suspension | 20.16 | SWL Broken: 250B 10.0 |
| TW1 Suspension | 14.09 250C: Extreme Wind (Trans.) | 0.0 |
| TW2 Suspension | 14.18 250C: Extreme Wind (Trans.) | 0.0 |
| TW3 Suspension | 11.38 250C: Extreme Wind (Trans.) | 0.0 |
| TW4 Suspension | 11.01 250C: Extreme Wind (Trans.) | 0.0 |
| TW5 Suspension | 15.04 250C: Extreme Wind (Trans.) | 0.0 |
| TW6 Suspension | 15.22 250C: Extreme Wind (Trans.) | 0.0 |
| TW7 Suspension | 6.56 250C: Extreme Wind (Trans.) | 0.0 |
| TW8 Suspension | 6.28 250C: Extreme Wind (Trans.) | 0.0 |
| C1 Suspension | 3.68 | 250B: NESC Heavy 0.0 |
| C2 Suspension | 1.65 | 250B: NESC Heavy 0.0 |
| C3 Suspension | 1.90 | 250B: NESC Heavy 0.0 |
| C4 Suspension | 1.90 | 250B: NESC Heavy 0.0 |
| C5 Suspension | 1.59 | 250B: NESC Heavy 0.0 |
| C1V Suspension | 1.10 250C: Extreme Wind (Trans.) | 0.0 |
| C3X Suspension | 0.49 250C: Extreme Wind (Trans.) | 0.0 |
| C3Y Suspension | 0.57 250C: Extreme Wind (Trans.) | 0.0 |
| C4Y Suspension | 0.57 250C: Extreme Wind (Trans.) | 0.0 |
| C5Y Suspension | 0.47 250C: Extreme Wind (Trans.) | 0.0 |
| C1X Suspension | 1.10 250C: Extreme Wind (Trans.) | 0.0 |
| C2X Suspension | 0.49 250C: Extreme Wind (Trans.) | 0.0 |
| C3X Suspension | 0.57 250C: Extreme Wind (Trans.) | 0.0 |
| C4X Suspension | 0.47 250C: Extreme Wind (Trans.) | 0.0 |
| C5X Suspension | 0.47 250C: Extreme Wind (Trans.) | 0.0 |
| C1XY Suspension | 2.19 250C: Extreme Wind (Trans.) | 0.0 |
| C2XY Suspension | 0.98 250C: Extreme Wind (Trans.) | 0.0 |
| C3XY Suspension | 1.13 250C: Extreme Wind (Trans.) | 0.0 |
| C4XY Suspension | 1.13 250C: Extreme Wind (Trans.) | 0.0 |
| C5XY Suspension | 0.94 250C: Extreme Wind (Trans.) | 0.0 |

*** Weight of structure (lbs): 32492.8
 Weight of Angles*Section DLF: 960.0
 Weight of Strains: 20.0
 Weight of Suspensions: 33472.8
 Total:

*** End of Report

APPENDIX D

SUPPLEMENTAL CALCULATIONS

Mast Connection at Tower

RISA Reactions

| Envelope Joint Reactions | | | | | | | | | | | | | | |
|--------------------------|---------|-----|-----------|----|-----------|----|-----------|----|-----------|----|-----------|----|-----------|----|
| | Joint | | X [lb] | LC | Y [lb] | LC | Z [lb] | LC | MX [k-ft] | LC | MY [k-ft] | LC | MZ [k-ft] | LC |
| 1 | TMS | max | 2126.811 | 2 | 4158.101 | 1 | 3466.959 | 4 | 0 | 1 | 0 | 1 | 0 | 1 |
| 2 | | min | -372.988 | 4 | 288.587 | 4 | -48.401 | 2 | 0 | 1 | 0 | 1 | 0 | 1 |
| 3 | TM4 | max | 2106.62 | 2 | 4019.711 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| 4 | | min | 777.456 | 4 | 2169.541 | 4 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| 5 | TM1 | max | 1888.798 | 4 | 4048.997 | 3 | 48.401 | 2 | 0 | 1 | 0 | 1 | 0 | 1 |
| 6 | | min | -5193.091 | 2 | -1344.954 | 2 | -9242.242 | 4 | 0 | 1 | 0 | 1 | 0 | 1 |
| 7 | TM2 | max | -2078.438 | 3 | -414.783 | 3 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| 8 | | min | -5172.641 | 2 | -1501.783 | 2 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| 9 | Totals: | max | 0 | 3 | 7237.845 | 1 | 0 | 2 | | | | | | |
| 10 | | min | -6132.3 | 2 | 4933.998 | 4 | -5775.283 | 4 | | | | | | |

RISA Reactions

- $Vert := 4.2 \cdot kip$ Worst Case (Envelope) of North Mast & South Mast
- $H_x := 5.2 \cdot kip$ Worst Case (Envelope) of North Mast & South Mast
- $H_z := 9.2 \cdot kip$ Worst Case (Envelope) of North Mast & South Mast

Bolt Input:

- Assumes ASTM A325 type N
- $N := 4$ Number of Bolts at Connection
- $D_{bolt} := 0.75 \cdot in$ Diameter of Bolts
- $F_{t.bolt} := 19.4 \cdot kip$ Allowable Tensile Strength, ASD 9th Table I-A
- $F_{v.bolt} := 9.3 \cdot kip$ Allowable Shear Strength, ASD 9th Table I-D
- $\mu := 0.4$ Coefficient of Friction - Steel on Steel

Calculations:

$$f_v := \frac{\sqrt{H_x^2 + Vert^2}}{N} = 1.671 \text{ kip}$$

$$Usage_{shear} := \frac{f_v}{F_{v.bolt}} = 0.18$$

$$T_{bolt} := 0.3 \cdot F_{t.bolt} = 5.82 \text{ kip}$$

$$F_{slip} := T_{bolt} \cdot N \cdot \mu = 9.312 \text{ kip}$$

$$Usage_{slip} := \frac{\sqrt{H_x^2 + Vert^2}}{F_{slip}} = 0.718$$

Assumed installed bolt tension



Assumed friction connection slip capacity


Status_{shear} := $\begin{cases} \text{if } Usage_{shear} \leq 1 \\ \text{“OK”} \\ \text{else} \\ \text{“NG”} \end{cases}$

Status_{slip} := $\begin{cases} \text{if } Usage_{slip} \leq 1 \\ \text{“OK”} \\ \text{else} \\ \text{“NG”} \end{cases}$

Flange Bolt and Flange Plate Analysis

RISA Forces: (Envelope)

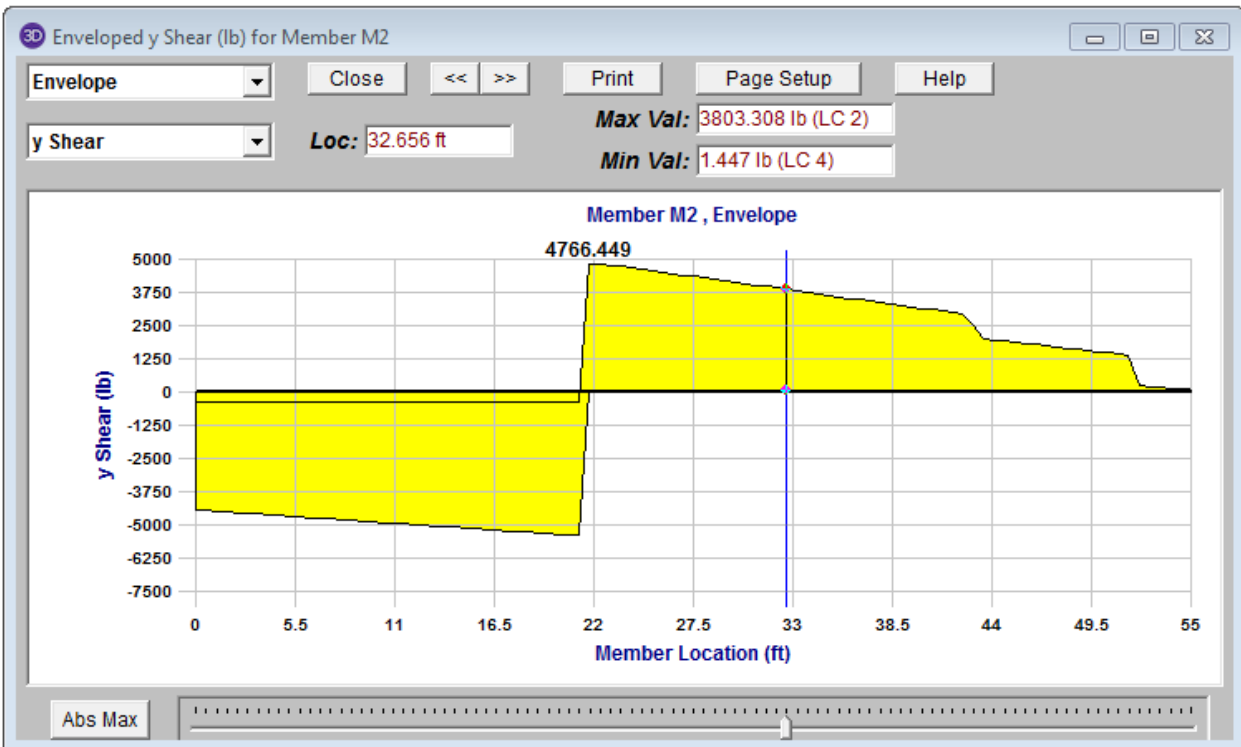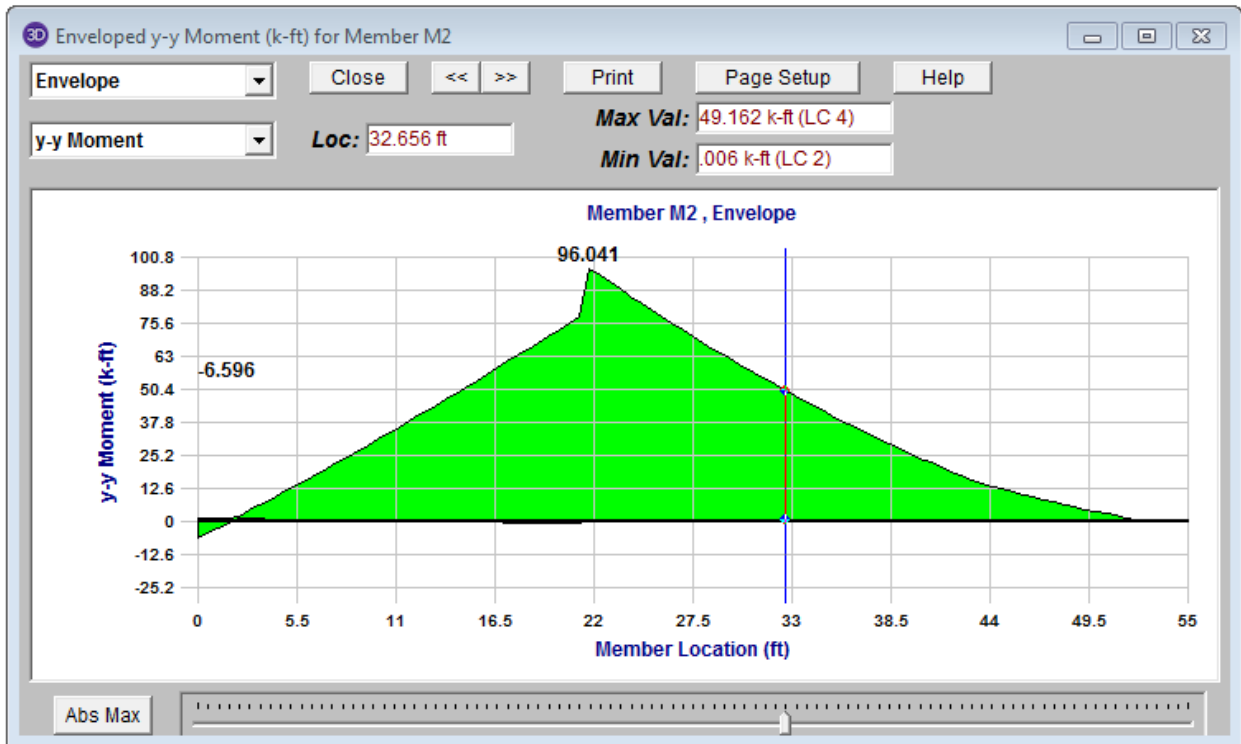

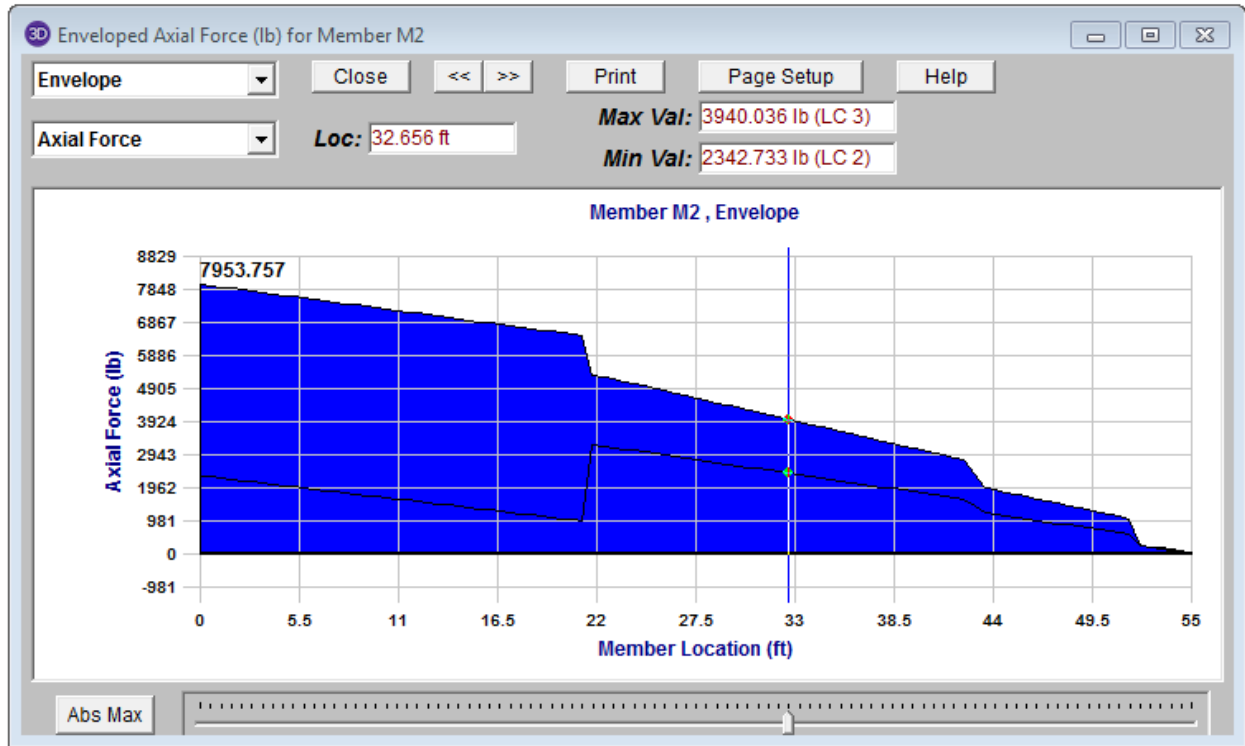

$OM := 49.2 \cdot ft \cdot kip$ South Mast, Envelope

$V := 3.8 \cdot kip$ South Mast, Envelope

$A := 3.9 \cdot kip$ South Mast, Envelope

Flange Bolt Input:

Assumes ASTM A325 bolts

$N := 8$ Number of Bolts

$BC := 17 \cdot in$

$Fu_{bolt} := 105 \cdot ksi$

$Fy_{bolt} := 81 \cdot ksi$

$E := 29000 \cdot ksi$

$D_{bolt} := 1.125 \cdot in$

$n := 7$ Threads per inch

Flange Plate Input:

Assumes ASTM A36

$Fy_{plate} := 36 \cdot ksi$

$t_{plate} := 1.5 \cdot in$

$$t_{Plate} := 1.5 \cdot in$$

$$D_{Plate} := 20 \cdot in$$

$$D_{Pole} := 12.75 \cdot in$$

Distance from Bolts to Centroid of Pole:

$$R_{BC} := \frac{BC}{2} = 8.5 \text{ in}$$

$$i := 1 .. N$$

$$d_i := \begin{cases} \theta \leftarrow 2 \cdot \pi \cdot \frac{i}{N} \\ d \leftarrow R_{BC} \cdot \sin(\theta) \end{cases}$$

$$d = \begin{bmatrix} 6.01 \\ 8.5 \\ 6.01 \\ 0 \\ -6.01 \\ -8.5 \\ -6.01 \\ 0 \end{bmatrix} \text{ in}$$

Determine Distances For Bending in Plate:

$$R_{Pole} := \frac{D_{Pole}}{2} = 6.375 \text{ in}$$

$$MA_i := \begin{cases} \text{if } d_i \geq R_{Pole} \\ \quad \left| d_i - R_{Pole} \right| \\ \text{else} \\ \quad \left| 0 \cdot in \right| \end{cases}$$

$$MA_i = \begin{bmatrix} 0 \\ 2.125 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix} \text{ in}$$

$$B_{eff} := 0.8 \cdot 2 \cdot \sqrt{\left(\frac{D_{Plate}}{2}\right)^2 - \left(\frac{D_{Pole}}{2}\right)^2} = 12.327 \text{ in}$$

Flange Bolt Properties and Check:

$$I_p := \sum_i d_i^2 = 289 \text{ in}^2$$

$$A_g := \frac{\pi \cdot D_{bolt}^2}{4} = 0.994 \text{ in}^2$$

$$A_n := \frac{\pi}{4} \cdot \left(D_{bolt} - \frac{0.9743 \text{ in}}{n} \right)^2 = 0.763 \text{ in}^2$$

$$D_n := \frac{2 \cdot \sqrt{A_n}}{\sqrt{\pi}} = 0.986 \text{ in}$$

Columbus

250 E Broad St, Suite 600

Columbus, OH 43215

Phone 614.221.6679

Founded in 1965

Orlando

3670 Maguire Blvd, Suite 250

Orlando, FL 32803

Phone 407.898.9039

100% Employee Owned

$$r_{bolt} := \frac{D_n}{4} = 0.246 \text{ in}$$

$$S_{bolt} := \pi \cdot \frac{D_n^3}{32} = 0.094 \text{ in}^3$$

$$T_{max} := OM \cdot \frac{R_{BC}}{I_p} \cdot \frac{A}{N} = 16.877 \text{ kip}$$

$$T_{allow} := 1.33 \cdot (0.33 \cdot A_g \cdot Fu_{bolt}) = 45.809 \text{ kip}$$

$$Bolt_{usage} := \frac{T_{max}}{T_{allow}} = 0.368$$

$$Status_{bolt} := \begin{cases} \text{if } Bolt_{usage} \leq 1 \\ \quad \text{“OK”} \\ \text{else} \\ \quad \text{“NG”} \end{cases} = \text{“OK”}$$

Flange Plate Check:

$$C_i := \frac{OM \cdot d_i}{I_p} + \frac{A}{N}$$

$$C = \begin{bmatrix} 12.766 \\ 17.852 \\ 12.766 \\ 0.488 \\ -11.791 \\ -16.877 \\ -11.791 \\ 0.487 \end{bmatrix} \text{ kip}$$

Bolt Forces

$$f_{bp} := \sum_i \frac{6 \cdot C_i \cdot MA_i}{B_{eff} \cdot t_{plate}^2} = 8.206 \text{ ksi}$$

$$F_{bp} := 1.33 \cdot 0.75 \cdot Fy_{plate} = 35.91 \text{ ksi}$$

$$Plate_{usage} := \frac{f_{bp}}{F_{bp}} = 0.229$$

$$Status_{plate} := \begin{cases} \text{if } Plate_{usage} \leq 1 \\ \quad \text{“OK”} \\ \text{else} \\ \quad \text{“NG”} \end{cases} = \text{“OK”}$$

Antenna Support Moment Frame Bolted To Lattice Structure - NESC 2007 Local Analysis Check (OTRM 059.1 Section E.2.e) Top Support Reactions

Maximum Reactions

| | | |
|-----------------------|-----------------------------|---|
| Compression Force = | $P_c := 13.8 \text{ kip}$ | Input from PLS-TOWER (Load Case 250C) |
| Vertical Force = | $P_v := 0 \cdot \text{kip}$ | Vertical Reaction Input from Risa (Reaction is Tension so used 0, Conservative) |
| Horizontal Force, x = | $H_x := 6.7 \text{ kip}$ | Horizontal Reaction Input from RISA Rx (250C) |
| Horizontal Force, y = | $H_y := 0.063 \text{ kip}$ | Horizontal Reaction Input from RISA Rz (250C) |

Member Properties (Equal Leg Angle)

| | | |
|---------------------------------|-------------------------------|------------|
| Member Type = | L 5x5x3/8 | User Input |
| Width of Member = | $w := 5 \text{ in}$ | User Input |
| Member Thickness = | $t := 0.375 \text{ in}$ | User Input |
| k(heel to toe of fillet) = | $k_{des} := 0.875 \text{ in}$ | User Input |
| Member Area = | $A := 3.61 \text{ in}^2$ | User Input |
| Unbraced Length = | $L := 2.5 \text{ ft}$ | User Input |
| Distance to Load along member = | $a := 1.25 \cdot \text{ft}$ | User Input |
| Effective Length Factor = | $K := 1$ | User Input |
| Radius of Gyration = | $r_x := 1.56 \text{ in}$ | User Input |
| Radius of Gyration = | $r_y := 1.56 \text{ in}$ | User Input |
| Radius of Gyration = | $r_z := 0.99 \text{ in}$ | User Input |
| Section Modulus = | $S_x := 2.42 \text{ in}^3$ | User Input |
| Section Modulus = | $S_y := 2.42 \text{ in}^3$ | User Input |
| Moment of Inertia = | $I_x := 8.74 \text{ in}^4$ | User Input |
| Moment of Inertia = | $I_y := 8.74 \text{ in}^4$ | User Input |
| Yield Stress = | $F_y := 33 \text{ ksi}$ | User Input |
| Modulus of Elasticity = | $E := 29000 \text{ ksi}$ | User Input |

Calculate the Compression Capacity

Per ASCE 10-97 Section 3.6 and 3.7)

Width to Thickness Ratio = $w_t := \frac{(w - k_{des})}{t} = 11$ (3.7-1)

Limits

$$\frac{80}{\sqrt{\frac{F_y}{ksi}}} = 13.926$$

$$\frac{144}{\sqrt{\frac{F_y}{ksi}}} = 25.0672$$

$$F_{cr} := \begin{cases} \text{if } w_t < \frac{80}{\sqrt{\frac{F_y}{ksi}}} \\ \quad \text{return } F_y \\ \text{else if } \frac{80}{\sqrt{\frac{F_y}{ksi}}} \leq w_t \leq \frac{144}{\sqrt{\frac{F_y}{ksi}}} \\ \quad \text{return } \left(1.677 - 0.677 \cdot \frac{w_t}{\left(\frac{80}{\sqrt{\frac{F_y}{ksi}}} \right)} \right) \cdot F_y \\ \text{else if } w_t > \frac{144}{\sqrt{\frac{F_y}{ksi}}} \\ \quad \text{return } \frac{0.0332 \cdot \pi^2 \cdot E}{w_t^2} \end{cases} = 33 \text{ ksi}$$

(3.7-2)

(3.7-3)

$F_{cr} = 33 \text{ ksi}$

$r := \min(r_x, r_y, r_z)$

$C_c := \pi \cdot \sqrt{\frac{2 \cdot E}{F_y}} = 131.706$ (3.6-3)

Determine Compression Capacity, $F_a =$

$$F_a := \begin{cases} \text{if } \left(\frac{K \cdot L}{r} \right) \leq C_c \\ \quad \left(1 - \frac{1}{2} \cdot \left(\frac{\left(\frac{K \cdot L}{r} \right)}{C_c} \right)^2 \right) \cdot F_{cr} \\ \text{else} \\ \quad \frac{\pi^2 \cdot E}{\left(\frac{K \cdot L}{r} \right)^2} \end{cases} = 32.127 \text{ ksi}$$

(3.6-1)

(3.6-2)

$$\frac{K \cdot L}{r} = 30.303$$

$F_a = 32.127 \text{ ksi}$

Determine the Bending capacity

(per ASCE 10-97 Section 3.14.8)

$$b := w - \frac{t}{2} = 4.813 \text{ in}$$

$$M_{yx} := F_y \cdot S_x = 79.86 \text{ kip} \cdot \text{in} \quad (\text{Yield Moment X direction})$$

$$M_{yy} := F_y \cdot S_y = 79.86 \text{ kip} \cdot \text{in} \quad (\text{Yield Moment Y direction})$$

$$M_{yc} := \min(M_{yx}, M_{yy}) = 79.86 \text{ kip} \cdot \text{in} \quad (\text{Compressive Yield Moment, 3.14.8})$$

$$M_{e.pos} := \frac{(0.66 \cdot E \cdot b^4 \cdot t)}{(K \cdot L)^2} \cdot \left(\sqrt{1 + \frac{0.81 \cdot (K \cdot L)^2 \cdot t^2}{b^4}} + 1 \right) = 8946.385 \text{ kip} \cdot \text{in} \quad (\text{Elastic Critical Moment + direction, 3.14-7})$$

$$M_{e.neg} := \frac{(0.66 \cdot E \cdot b^4 \cdot t)}{(K \cdot L)^2} \cdot \left(\sqrt{1 + \frac{0.81 \cdot (K \cdot L)^2 \cdot t^2}{b^4}} - 1 \right) = 390.919 \text{ kip} \cdot \text{in} \quad (\text{Elastic Critical Moment - direction, 3.14-7})$$

$$M_e := \min(M_{e.pos}, M_{e.neg}) = 390.919 \text{ kip} \cdot \text{in}$$

$$M_b := \begin{cases} \text{if } M_e \leq 0.5 \cdot M_{yc} \\ \quad \left| \begin{array}{l} M_e \\ \end{array} \right| \\ \text{else if } M_e > 0.5 \cdot M_{yc} \\ \quad \left| \begin{array}{l} M_{yc} \cdot \left(1 - \frac{M_{yc}}{4 \cdot M_e} \right) \\ \end{array} \right| \end{cases} = 75.781 \text{ kip} \cdot \text{in}$$

$$M_a := \min(M_b, M_{yc}) = 75.781 \text{ kip} \cdot \text{in} \quad (\text{Allowable Bending Moment, 3.14.8})$$

$$M_{ax} := M_a \quad M_{ay} := M_a$$

Check Combined Axial and Bending

$C_m := 0.85$ (Restrained Ends) $L_x := 2 \text{ ft} + 2.8125 \text{ in}$ (Bending Length)
 $P := P_c + P_v = 13.8 \text{ kip}$ (Total Axial Load) $L_y := 2 \text{ ft} + 1.4375 \text{ in}$ (Bending Length)
(Re: Tower Dwgs. sht. 23)
 $P_a := F_a \cdot A = 115.977 \text{ kip}$ (Design Axial Load)
 $P_y := F_y \cdot A = 119.13 \text{ kip}$ (Axial Compression at Yield)

$$P_{ex} := \frac{\pi^2 \cdot E \cdot I_x}{(K \cdot L_x)^2} = 3479.642 \text{ kip}$$

$$P_{ey} := \frac{\pi^2 \cdot E \cdot I_y}{(K \cdot L_y)^2} = 3865.986 \text{ kip}$$

$$M_x := \frac{H_x \cdot a \cdot (L_x - a)}{L_x} = 44.276 \text{ kip} \cdot \text{in}$$

$$M_y := \frac{H_y \cdot a \cdot (L_y - a)}{L_y} = 0.388 \text{ kip} \cdot \text{in}$$

$$Check_1 := \frac{P}{P_a} + \frac{C_m \cdot M_x}{M_{ax}} \cdot \left(\frac{1}{1 - \frac{P}{P_{ex}}} \right) + \frac{C_m \cdot M_y}{M_{ay}} \cdot \left(\frac{1}{1 - \frac{P}{P_{ey}}} \right) = 0.622 \tag{3.12-1}$$

$$Check_2 := \frac{P}{P_y} + \frac{M_x}{M_{ax}} + \frac{M_y}{M_{ay}} = 0.705 \tag{3.12-2}$$

$$Status_1 := \left\| \begin{array}{l} \text{if } Check_1 \leq 1 \\ \quad \left\| \begin{array}{l} \text{"OK"} \\ \text{else} \\ \text{"NG"} \end{array} \right\| \end{array} \right\| = \text{"OK"}$$

$$Status_2 := \left\| \begin{array}{l} \text{if } Check_2 \leq 1 \\ \quad \left\| \begin{array}{l} \text{"OK"} \\ \text{else} \\ \text{"NG"} \end{array} \right\| \end{array} \right\| = \text{"OK"}$$

**Antenna Support Moment Frame Bolted To Lattice Structure - NESC 2007
Local Analysis Check (OTRM 059.1 Section E.2.e)
Bottom Support Reactions**

Maximum Reactions

| | | |
|-----------------------|-------------------------------|--|
| Compression Force = | $P_c := 5.4 \text{ kip}$ | Input from PLS-TOWER, 250C |
| Vertical Force = | $P_v := 4.9 \cdot \text{kip}$ | Vertical Reaction Input from Risa 3D |
| Horizontal Force, x = | $H_x := 2.9 \text{ kip}$ | Horizontal Reaction Input from Risa 3D |
| Horizontal Force, y = | $H_y := 0.063 \text{ kip}$ | Horizontal Reaction Input from Risa 3D |

Member Properties (Equal Leg Angle)

| | | |
|---------------------------------|-------------------------------|------------|
| Member Type = | L 8x8x1/2 | User Input |
| Width of Member = | $w := 8 \text{ in}$ | User Input |
| Member Thickness = | $t := 0.5 \text{ in}$ | User Input |
| k(heel to toe of fillet) = | $k_{des} := 1.125 \text{ in}$ | User Input |
| Member Area = | $A := 7.75 \text{ in}^2$ | User Input |
| Unbraced Length = | $L := 5 \text{ ft}$ | User Input |
| Distance to Load along member = | $a := 1.25 \cdot \text{ft}$ | User Input |
| Effective Length Factor = | $K := 1$ | User Input |
| Radius of Gyration = | $r_x := 2.5 \text{ in}$ | User Input |
| Radius of Gyration = | $r_y := 2.5 \text{ in}$ | User Input |
| Radius of Gyration = | $r_z := 1.59 \text{ in}$ | User Input |
| Section Modulus = | $S_x := 8.36 \text{ in}^3$ | User Input |
| Section Modulus = | $S_y := 8.36 \text{ in}^3$ | User Input |
| Moment of Inertia = | $I_x := 48.6 \text{ in}^4$ | User Input |
| Moment of Inertia = | $I_y := 48.6 \text{ in}^4$ | User Input |
| Yield Stress = | $F_y := 33 \text{ ksi}$ | User Input |
| Modulus of Elasticity = | $E := 29000 \text{ ksi}$ | User Input |

Calculate the Compression Capacity

Per ASCE 10-97 Section 3.6 and 3.7)

Width to Thickness Ratio = $w_t := \frac{(w - k_{des})}{t} = 13.75$ (3.7-1)

Limits

$\frac{80}{\sqrt{\frac{F_y}{ksi}}} = 13.926$

$\frac{144}{\sqrt{\frac{F_y}{ksi}}} = 25.0672$

$$F_{cr} := \begin{cases} \text{if } w_t < \frac{80}{\sqrt{\frac{F_y}{ksi}}} \\ \text{return } F_y \\ \text{else if } \frac{80}{\sqrt{\frac{F_y}{ksi}}} \leq w_t \leq \frac{144}{\sqrt{\frac{F_y}{ksi}}} \\ \text{return } \left(1.677 - 0.677 \cdot \frac{w_t}{\left(\frac{80}{\sqrt{\frac{F_y}{ksi}}} \right)} \right) \cdot F_y \\ \text{else if } w_t > \frac{144}{\sqrt{\frac{F_y}{ksi}}} \\ \text{return } \frac{0.0332 \cdot \pi^2 \cdot E}{w_t^2} \end{cases} = 33 \text{ ksi}$$

(3.7-2)

(3.7-3)

$F_{cr} = 33 \text{ ksi}$

$r := \min(r_x, r_y, r_z)$

$C_c := \pi \cdot \sqrt{\frac{2 \cdot E}{F_y}} = 131.706$ (3.6-3)

Determine Compression Capacity, $F_a =$

$$F_a := \begin{cases} \text{if } \left(\frac{K \cdot L}{r} \right) \leq C_c \\ \left(1 - \frac{1}{2} \cdot \left(\frac{\left(\frac{K \cdot L}{r} \right)}{C_c} \right)^2 \right) \cdot F_{cr} \\ \text{else} \\ \frac{\pi^2 \cdot E}{\left(\frac{K \cdot L}{r} \right)^2} \end{cases} = 31.646 \text{ ksi}$$

(3.6-1)

(3.6-2)

$\frac{K \cdot L}{r} = 37.736$

$F_a = 31.646 \text{ ksi}$

Determine the Bending capacity

(per ASCE 10-97 Section 3.14.8)

$$b := w - \frac{t}{2} = 7.75 \text{ in}$$

$$M_{yx} := F_y \cdot S_x = 275.88 \text{ kip} \cdot \text{in} \quad (\text{Yield Moment})$$

$$M_{yy} := F_y \cdot S_y = 275.88 \text{ kip} \cdot \text{in} \quad (\text{Yield Moment})$$

$$M_{yc} := \min(M_{yx}, M_{yy}) = 275.88 \text{ kip} \cdot \text{in} \quad (\text{Compressive Yield Moment, 3.14.8})$$

$$M_{e.pos} := \frac{(0.66 \cdot E \cdot b^4 \cdot t)}{(K \cdot L)^2} \cdot \left(\sqrt{1 + \frac{0.81 \cdot (K \cdot L)^2 \cdot t^2}{b^4}} + 1 \right) = 20104.305 \text{ kip} \cdot \text{in} \quad (\text{Elastic Critical Moment + direction, 3.14-7})$$

$$M_{e.neg} := \frac{(0.66 \cdot E \cdot b^4 \cdot t)}{(K \cdot L)^2} \cdot \left(\sqrt{1 + \frac{0.81 \cdot (K \cdot L)^2 \cdot t^2}{b^4}} - 1 \right) = 924.409 \text{ kip} \cdot \text{in} \quad (\text{Elastic Critical Moment - direction, 3.14-7})$$

$$M_e := \min(M_{e.pos}, M_{e.neg}) = 924.409 \text{ kip} \cdot \text{in}$$

$$M_b := \begin{cases} M_e & \text{if } M_e \leq 0.5 \cdot M_{yc} \\ M_{yc} \cdot \left(1 - \frac{M_{yc}}{4 \cdot M_e} \right) & \text{else if } M_e > 0.5 \cdot M_{yc} \end{cases} = 255.297 \text{ kip} \cdot \text{in}$$

$$M_a := \min(M_b, M_{yc}) = 255.297 \text{ kip} \cdot \text{in} \quad (\text{Allowable Bending Moment, 3.14.8})$$

$$M_{ax} := M_a \quad M_{ay} := M_a$$

Check Combined Axial and Bending

$C_m := 0.85$ (Restrained Ends) $L_x := L$

$P := P_c + P_v = 10.3 \text{ kip}$ (Total Axial Load) $L_y := L$

$P_a := F_a \cdot A = 245.253 \text{ kip}$ (Design Axial Load)

$P_y := F_y \cdot A = 255.75 \text{ kip}$ (Axial Compression at Yield)

$$P_{ex} := \frac{\pi^2 \cdot E \cdot I_x}{(K \cdot L_x)^2} = 3863.95 \text{ kip}$$

$$P_{ey} := \frac{\pi^2 \cdot E \cdot I_y}{(K \cdot L_y)^2} = 3863.95 \text{ kip}$$

$$M_x := \frac{H_x \cdot a \cdot (L_x - a)}{L_x} = 32.625 \text{ kip} \cdot \text{in}$$

$$M_y := \frac{H_y \cdot a \cdot (L_y - a)}{L_y} = 0.709 \text{ kip} \cdot \text{in}$$

$$Check_1 := \frac{P}{P_a} + \frac{C_m \cdot M_x}{M_{ax}} \cdot \left(\frac{1}{1 - \frac{P}{P_{ex}}} \right) + \frac{C_m \cdot M_y}{M_{ay}} \cdot \left(\frac{1}{1 - \frac{P}{P_{ey}}} \right) = 0.153 \tag{3.12-1}$$

$$Check_2 := \frac{P}{P_y} + \frac{M_x}{M_{ax}} + \frac{M_y}{M_{ay}} = 0.171 \tag{3.12-2}$$

$$Status_1 := \begin{cases} \text{if } Check_1 \leq 1 \\ \quad \text{“OK”} \\ \text{else} \\ \quad \text{“NG”} \end{cases} = \text{“OK”}$$

$$Status_2 := \begin{cases} \text{if } Check_2 \leq 1 \\ \quad \text{“OK”} \\ \text{else} \\ \quad \text{“NG”} \end{cases} = \text{“OK”}$$

Foundation Analysis (OTRM 059.1)

Reactions

| Summary of Joint Support Reactions For All Load Cases | | | | | | | | | | | |
|---|-----------------------------|-------------|--------------------|--------------------|--------------------|--------------------|---------------------|---------------------|-----------------------|---------------------|----------------|
| | Load Case | Joint Label | Long. Force (kips) | Tran. Force (kips) | Vert. Force (kips) | Shear Force (kips) | Tran. Moment (ft-k) | Long. Moment (ft-k) | Bending Moment (ft-k) | Vert. Moment (ft-k) | Found. Usage % |
| 1 | 250B: NESC Heavy | -2S | -24.03 | -33.04 | -123.55 | 40.85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2 | 250B: NESC Heavy | -2X | 13.95 | -20.62 | 64.06 | 24.89 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3 | 250B: NESC Heavy | -2XY | -12.50 | -18.63 | 59.46 | 22.44 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 4 | 250B: NESC Heavy | -2Y | 22.58 | -30.79 | -117.82 | 38.18 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 5 | 250C: Extreme Wind (Trans.) | -2X | 18.75 | -26.69 | 88.10 | 32.62 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 6 | 250C: Extreme Wind (Trans.) | -2Y | 22.45 | -32.86 | -117.22 | 39.80 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 7 | 250C: Extreme Wind (Trans.) | -2XY | -18.67 | -26.59 | 88.00 | 32.49 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 8 | 250C: Extreme Wind (Trans.) | -2S | -22.53 | -32.99 | -117.55 | 39.95 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 9 | SWL Broken: 250B | -2Y | 20.10 | -25.95 | -105.67 | 32.83 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 10 | SWL Broken: 250B | -2S | -24.85 | -36.90 | -130.93 | 44.48 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 11 | SWL Broken: 250B | -2X | 12.10 | -19.43 | 49.83 | 22.89 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 12 | SWL Broken: 250B | -2XY | -13.46 | -18.89 | 69.53 | 23.20 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 13 | SWR Broken: 250B | -2S | -26.95 | -36.59 | -144.89 | 45.44 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 14 | SWR Broken: 250B | -2XY | -12.28 | -21.69 | 65.47 | 24.92 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 15 | SWR Broken: 250B | -2X | 12.67 | -16.09 | 51.21 | 20.47 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 16 | SWR Broken: 250B | -2Y | 16.91 | -25.89 | -88.83 | 30.92 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 17 | TCL Broken: 250B | -2XY | -23.26 | -29.53 | 109.61 | 37.59 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 18 | TCL Broken: 250B | -2Y | 25.27 | -34.03 | -132.67 | 42.39 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 19 | TCL Broken: 250B | -2X | 1.49 | -24.50 | 8.58 | 24.55 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 20 | TCL Broken: 250B | -2S | -14.75 | -11.70 | -101.90 | 18.83 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

$$H_{shear} := 45.4 \text{ kip} \cdot 1.1 = 49.94 \text{ kip}$$

Maximum Shear Force

$$P_{comp} := 144.9 \text{ kip} \cdot 1.1 = 159.39 \text{ kip}$$

Maximum Compression Force

$$P_{tens} := 109.6 \text{ kip} \cdot 1.1 = 120.56 \text{ kip}$$

Maximum Tension Force

Foundation Properties

$$Pier_{height} := 9.5 \text{ ft}$$

$$Pier_{width.top} := 3 \text{ ft}$$

$$Pier_{width.bot} := 6 \text{ ft}$$

$$Pier_{projection} := 0.5 \text{ ft}$$

$$Ftg_{width} := 11 \text{ ft}$$

$$Ftg_{thick} := 3 \text{ ft}$$

Geotechnical Properties

$$\gamma_{conc} := 150 \text{ pcf}$$

$$\gamma_{water} := 62.4 \text{ pcf}$$

$$\gamma_{soil} := 100 \text{ pcf}$$

$$\phi_{soil} := 30 \text{ deg}$$

$$q_{soil} := 9 \text{ ksf}$$

Calculations

$$V_{fig} := Ftg_{width}^2 \cdot Ftg_{thick} = 363 \text{ ft}^3$$

$$V_{pier} := \frac{Pier_{height}}{3} \cdot (Pier_{width.top}^2 + Pier_{width.bot}^2 + \sqrt{Pier_{width.top}^2 \cdot Pier_{width.bot}^2}) = 199.5 \text{ ft}^3$$

$$Base_1 := Pier_{width.bot}^2 = 36 \text{ ft}^2 \quad \text{Resisting Pyramid Base 1}$$

$$Base_2 := (2 \cdot \tan(\phi_{soil}) \cdot (Pier_{height} - Pier_{projection}) + Ftg_{width})^2 = 457.631 \text{ ft}^2 \quad \text{Resisting Pyramid Base 2}$$

$$V_{soil} := \left(\left(\frac{Pier_{height} - Pier_{projection}}{3} \right) \cdot (Base_1 + Base_2 + \sqrt{Base_1 \cdot Base_2}) \right) - V_{pier} = 1666.454 \text{ ft}^3$$

$$V_{conc} := V_{fig} + V_{pier} = 562.5 \text{ ft}^3$$

$$W_{conc} := V_{conc} \cdot \gamma_{conc} = 84.375 \text{ kip}$$

$$W_{soil} := V_{soil} \cdot \gamma_{soil} = 166.645 \text{ kip}$$

$$W_{tot} := W_{conc} + W_{soil} = 251.02 \text{ kip}$$

Uplift Check

$$Usage_{uplift} := \frac{P_{tens}}{W_{tot}} = 0.48$$

$$Status_{uplift} := \begin{cases} \text{if } Usage_{uplift} \leq 1 \\ \text{“OK”} \\ \text{else} \\ \text{“NG”} \end{cases} = \text{“OK”}$$

Overturning Check

$$M_{ot} := H_{shear} \cdot (Pier_{height} + Pier_{projection} + Ftg_{thick}) = 649.22 \text{ kip} \cdot \text{ft}$$

$$M_{res} := (W_{conc} + (\gamma_{soil} \cdot ((Ftg_{width}^2 \cdot Pier_{height}) - V_{pier}))) \cdot \frac{Ftg_{width}}{2} = 986.563 \text{ kip} \cdot \text{ft}$$

$$Usage_{OT} := \frac{M_{ot}}{M_{res}} = 0.658$$

$$Status_{ot} := \begin{cases} \text{if } Usage_{OT} \leq 1 \\ \text{“OK”} \\ \text{else} \\ \text{“NG”} \end{cases} = \text{“OK”}$$

Soil Bearing Check

$$A_{fig} := Ftg_{width}^2 = 121 \text{ ft}^2$$

$$S_{fig} := \frac{Ftg_{width}^3}{6} = 221.833 \text{ ft}^3$$

$$q_{brg} := \frac{P_{comp} + W_{conc}}{A_{fig}} + \frac{H_{shear} \cdot (Pier_{height} + Pier_{projection} + Ftg_{thick})}{S_{fig}} = 4.941 \text{ ksf}$$

$$Usage_{bearing} := \frac{q_{brg}}{q_{soil}} = 0.549$$

$$Status_{bearing} := \begin{cases} \text{if } Usage_{bearing} \leq 1 \\ \quad \text{"OK"} \\ \text{else} \\ \quad \text{"NG"} \end{cases} = \text{"OK"}$$

APPENDIX E

SUPPLEMENTAL INFORMATION

| | |
|--|--------------------------------------|
| RAN Template: 793D Outdoor (evolved from 3A) | A&L Template: 793D_3QP |
|--|--------------------------------------|

Section 1 - Site Information

| | | |
|---|---|---|
| Site ID: CT11356C Status: Draft Version: 0.1 Project Type: Capacity Approved: Not Approved Approved By: Not Approved Last Modified: 6/23/2016 12:13:35 PM Last Modified By: GSM1900\AMurill9 | Site Name: CT356/CL&P Tower - Rt.123 Site Class: Utility Lattice Tower Site Type: Structure Non Building Solution Type: Plan Year: Market: CONNECTICUT Vendor: Ericsson Landlord: CL&P | Latitude: 41.12576000 Longitude: -73.43270000 Address: 2 Willruss Street Pole #1102 Line # 1880 City, State: Norwalk, CT Region: NORTHEAST |
|---|---|---|


| | | | | |
|---|-------------------------|------------------------------|---------------------|---------------------|
| RAN Template: 793D Outdoor (evolved from 3A) | | AL Template: 793D_3QP | | |
| Sector Count: 3 | Antenna Count: 6 | Line Count: 36 | TMA Count: 0 | RRU Count: 0 |

Section 2 - Existing Template Images

----- This section is intentionally blank. -----

Section 3 - Proposed Template Images

793D_A&L_evolved_from_3B.png

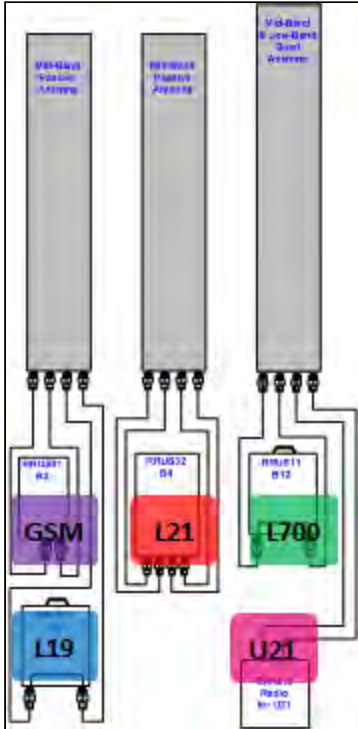

Notes:

DRAFT

Section 4 - Siteplan Images

----- This section is intentionally blank. -----

DRAFT

| | |
|--|--------------------------------------|
| RAN Template: 793D Outdoor (evolved from 3A) | A&L Template: 793D_3QP |
|--|--------------------------------------|

Section 5 - RAN Equipment

Existing RAN Equipment

Template: Custom

| Enclosure | 1 | 2 |
|----------------|---|----------|
| Enclosure Type | RBS 6102 | RBS 3106 |
| Baseband | DUW30 (x2) DUS41 DUG20 | |
| Radio | RUS01 B2 (x6) RUS01 B4 (x6) RRUS11 B12 (x3) L700 | |

Proposed RAN Equipment

Template: 793D Outdoor (evolved from 3A)

| Enclosure | 1 | 2 |
|----------------|---|---------------------|
| Enclosure Type | RBS 6102 | Ancillary Equipment |
| Baseband | DUS41 (x2) DUG20 DUW30 | |
| Multiplexer | XMU | |
| Radio | RUS01 B4 (x3) RRUS32 B4 (x3) RRUS11 B12 (x3) RRUS11 B2 (x3) U2100 L2100 L700 L1900 RUS01 B2 (x3) G1900 | |

RAN Scope of Work:

Swap DUL20 with DUS41 and Add XMU. All RRU's will be ground based.

| | |
|--|--------------------------------------|
| RAN Template: 793D Outdoor (evolved from 3A) | A&L Template: 793D_3QP |
|--|--------------------------------------|

Section 6 - A&L Equipment

Existing Template: Custom
Proposed Template: 793D_3QP

Sector 1 (Existing) view from behind

| | | | |
|-------------------------------|--|--|---|
| Coverage Type | A - Outdoor Macro | | |
| Antenna | 1 | 2 | |
| Antenna Model | APX16DWV-16DWV-S-E-A20 (Quad) | LNX-6512DS-A1M (Dual) | |
| Azimuth | 45 | 45 | |
| M. Tilt | 0 | 0 | |
| Height | 114 | 114 | |
| Ports | P1 | P2 | P3 |
| Active Tech. | U1900 G1900 | U2100 L2100 | L700 |
| Dark Tech. | | | |
| Restricted Tech. | | | |
| Decomm. Tech. | | | |
| E. Tilt | 3 | 3 | 2 |
| Cables | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. |
| TMA's | | | |
| Diplexers / Combiners | | | |
| Radio | | | |
| Sector Equipment | | | |
| Unconnected Equipment: | | | |
| Scope of Work: | | | |
| <input type="text"/> | | | |

| | |
|--|--------------------------------------|
| RAN Template: 793D Outdoor (evolved from 3A) | A&L Template: 793D_3QP |
|--|--------------------------------------|

| Sector 1 (Proposed) view from behind | | | | | | | |
|---|--|--|--|--|--|--|-----------|
| Coverage Type | A - Outdoor Macro | | | | | | |
| Antenna | 1 | | | 2 | | | |
| Antenna Model | APX16DWW-16DWW-S-E-A20 (Quad) | | | RV4PX306R (Penta) | | | |
| Azimuth | 45 | | | 45 | | | |
| M. Tilt | 0 | | | 0 | | | |
| Height | 114 | | | 114 | | | |
| Ports | P1 | P2 | P3 | P4 | P5 | P6 | P7 |
| Active Tech. | G1900 | L1900 | L2100 | L2100 | L700 | U2100 | |
| Dark Tech. | | | | | | | |
| Restricted Tech. | | | | | | | |
| Decomm. Tech. | | | | | | | |
| E. Tilt | | | | | | | |
| Cables | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | |
| TMA's | | | | | | | |
| Diplexers / Combiners | | | | | | | |
| Radio | | | | | | | |
| Sector Equipment | | | | | | | |
| Unconnected Equipment: | | | | | | | |
| Scope of Work: | | | | | | | |
| <div style="border: 1px solid black; height: 20px; width: 100%;"></div> | | | | | | | |

| | |
|--|--------------------------------------|
| RAN Template: 793D Outdoor (evolved from 3A) | A&L Template: 793D_3QP |
|--|--------------------------------------|

| Sector 2 (Existing) view from behind | | | |
|---|--|--|---|
| Coverage Type | A - Outdoor Macro | | |
| Antenna | 1 | | 2 |
| Antenna Model | APX16DWW-16DWW-S-E-A20 (Quad) | | LNX-6512DS-A1M (Dual) |
| Azimuth | 165 | | 165 |
| M. Tilt | 0 | | 0 |
| Height | 114 | | 114 |
| Ports | P1 | P2 | P3 |
| Active Tech. | U1900 G1900 | U2100 L2100 | L700 |
| Dark Tech. | | | |
| Restricted Tech. | | | |
| Decomm. Tech. | | | |
| E. Tilt | 4 | 4 | 2 |
| Cables | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. |
| TMA's | | | |
| Diplexers / Combiners | | | |
| Radio | | | |
| Sector Equipment | | | |
| Unconnected Equipment: | | | |
| Scope of Work: | | | |
| <input style="width: 100%; height: 20px;" type="text"/> | | | |

| | |
|--|--------------------------------------|
| RAN Template: 793D Outdoor (evolved from 3A) | A&L Template: 793D_3QP |
|--|--------------------------------------|


| Sector 2 (Proposed) view from behind | | | | | | | |
|---|--|--|--|--|--|--|--|
| Coverage Type | A - Outdoor Macro | | | | | | |
| Antenna | 1 | | | 2 | | | |
| Antenna Model | APX16DWW-16DWW-S-E-A20 (Quad) | | | RV4PX306R (Penta) | | | |
| Azimuth | 165 | | | 165 | | | |
| M. Tilt | 0 | | | 0 | | | |
| Height | 114 | | | 114 | | | |
| Ports | P1 | P2 | P3 | P4 | P5 | P6 | P7 |
| Active Tech. | G1900 | L1900 | L2100 | L2100 | L700 | U2100 | |
| Dark Tech. | | | | | | | |
| Restricted Tech. | | | | | | | |
| Decomm. Tech. | | | | | | | |
| E. Tilt | | | | | | | |
| Cables | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. |
| TMA's | | | | | | | |
| Diplexers / Combiners | | | | | | | |
| Radio | | | | | | | |
| Sector Equipment | | | | | | | |
| Unconnected Equipment: | | | | | | | |
| Scope of Work: | | | | | | | |
| <div style="border: 1px solid black; height: 20px; width: 100%;"></div> | | | | | | | |

| | |
|--|--------------------------------------|
| RAN Template: 793D Outdoor (evolved from 3A) | A&L Template: 793D_3QP |
|--|--------------------------------------|

| Sector 3 (Existing) view from behind | | | |
|---|--|--|---|
| Coverage Type | A - Outdoor Macro | | |
| Antenna | 1 | | 2 |
| Antenna Model | APX16DWV-16DWV-S-E-A20 (Quad) | | LNX-6512DS-A1M (Dual) |
| Azimuth | 285 | | 285 |
| M. Tilt | 0 | | 0 |
| Height | 114 | | 114 |
| Ports | P1 | P2 | P3 |
| Active Tech. | U1900 G1900 | U2100 L2100 | L700 |
| Dark Tech. | | | |
| Restricted Tech. | | | |
| Decomm. Tech. | | | |
| E. Tilt | 1 | 1 | 2 |
| Cables | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. |
| TMA's | | | |
| Diplexers / Combiners | | | |
| Radio | | | |
| Sector Equipment | | | |
| Unconnected Equipment: | | | |
| Scope of Work: | | | |
| <input style="width: 100%; height: 20px;" type="text"/> | | | |

| | |
|--|--------------------------------------|
| RAN Template: 793D Outdoor (evolved from 3A) | A&L Template: 793D_3QP |
|--|--------------------------------------|

| Sector 3 (Proposed) view from behind | | | | | | | |
|--------------------------------------|--|--|--|--|--|--|-----------|
| Coverage Type | A - Outdoor Macro | | | | | | |
| Antenna | 1 | | | 2 | | | |
| Antenna Model | APX16DWW-16DWW-S-E-A20 (Quad) | | | RV4PX306R (Penta) | | | |
| Azimuth | 285 | | | 285 | | | |
| M. Tilt | 0 | | | 0 | | | |
| Height | 114 | | | 114 | | | |
| Ports | P1 | P2 | P3 | P4 | P5 | P6 | P7 |
| Active Tech. | G1900 | L1900 | L2100 | L2100 | L700 | U2100 | |
| Dark Tech. | | | | | | | |
| Restricted Tech. | | | | | | | |
| Decomm. Tech. | | | | | | | |
| E. Tilt | | | | | | | |
| Cables | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | 1-1/4" Coax - 170 ft. 1-1/4" Coax - 170 ft. | |
| TMA's | | | | | | | |
| Diplexers / Combiners | | | | | | | |
| Radio | | | | | | | |
| Sector Equipment | | | | | | | |
| Unconnected Equipment: | | | | | | | |
| Scope of Work: | | | | | | | |
| | | | | | | | |



RV4PX306R

Multiband Antenna, 698–960 and 4x 1710–2690 MHz, 65° horizontal beamwidth, internal electrical tilt with manual override.

Electrical Specifications

| Frequency Band, MHz | 698–790 | 790–890 | 890–960 | 1710–1920 | 1920–2180 | 2300–2690 |
|--------------------------------------|-------------|-------------|-------------|------------|------------|------------|
| Gain, dBi | 14.2 | 14.4 | 14.9 | 14.7 | 15.2 | 16.1 |
| Beamwidth, Horizontal, degrees | 68 | 69 | 63 | 63 | 63 | 62 |
| Beamwidth, Vertical, degrees | 16.4 | 14.9 | 13.6 | 13.7 | 12.2 | 9.7 |
| Beam Tilt, degrees | 0–10 | 0–10 | 0–10 | 0–10 | 0–10 | 0–10 |
| USLS (First Lobe), dB | 18 | 18 | 18 | 18 | 18 | 18 |
| Null Fill, dB | -22 | -22 | -22 | -22 | -22 | -22 |
| Front-to-Back Ratio at 180°, dB | 23 | 23 | 23 | 27 | 28 | 28 |
| CPR at Boresight, dB | 16 | 12 | 12 | 17 | 15 | 14 |
| CPR at Sector, dB | 8 | 8 | 6 | 5 | 3 | 2 |
| Isolation, dB | 25 | 25 | 25 | 25 | 25 | 25 |
| Isolation, Intersystem, dB | 30 | 30 | 30 | 30 | 30 | 30 |
| VSWR Return Loss, dB | 1.43 15.0 | 1.43 15.0 | 1.43 15.0 | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 |
| PIM, 3rd Order, 2 x 20 W, dBc | -150 | -150 | -150 | -150 | -150 | -150 |
| Input Power per Port, maximum, watts | 300 | 300 | 300 | 250 | 250 | 250 |
| Polarization | ±45° | ±45° | ±45° | ±45° | ±45° | ±45° |
| Impedance | 50 ohm | 50 ohm | 50 ohm | 50 ohm | 50 ohm | 50 ohm |

Electrical Specifications, BASTA*

| Frequency Band, MHz | 698–790 | 790–890 | 890–960 | 1710–1920 | 1920–2180 | 2300–2690 |
|---|------------|------------|------------|------------|------------|------------|
| Gain by all Beam Tilts, average, dBi | 14.0 | 14.2 | 14.6 | 14.6 | 15.0 | 15.8 |
| Gain by all Beam Tilts Tolerance, dB | ±0.2 | ±0.2 | ±0.3 | ±0.5 | ±0.4 | ±0.5 |
| Gain by Beam Tilt, average, dBi | 0° 14.0 | 0° 14.2 | 0° 14.6 | 0° 14.6 | 0° 15.0 | 0° 16.0 |
| | 5° 14.0 | 5° 14.2 | 5° 14.6 | 5° 14.6 | 5° 15.0 | 5° 15.8 |
| | 10° 14.0 | 10° 14.1 | 10° 14.6 | 10° 14.6 | 10° 15.1 | 10° 15.6 |
| Beamwidth, Horizontal Tolerance, degrees | ±1.4 | ±1.2 | ±1.6 | ±2.5 | ±3.5 | ±6.4 |
| Beamwidth, Vertical Tolerance, degrees | ±0.8 | ±0.8 | ±0.5 | ±0.9 | ±1 | ±0.9 |
| USLS, beampeak to 20° above beampeak, dB | 18 | 18 | 18 | 18 | 18 | 18 |
| Front-to-Back Total Power at 180° ± 30°, dB | 25 | 23 | 23 | 23 | 25 | 25 |
| CPR at Boresight, dB | 17 | 13 | 13 | 20 | 17 | 18 |
| CPR at Sector, dB | 10 | 10 | 8 | 7 | 5 | 4 |

* CommScope® supports NGMN recommendations on Base Station Antenna Standards (BASTA). To learn more about the benefits of BASTA, [download the whitepaper Time to Raise the Bar on BSAs.](#)

General Specifications

| | |
|--------------------------|---------------------------------|
| Antenna Type | Sector with internal RET |
| Band | Multiband |
| Brand | DualPol® |
| Operating Frequency Band | 1710 – 2690 MHz 698 – 960 MHz |
| Performance Note | Outdoor usage |

RV4PX306R

Mechanical Specifications

| | |
|------------------------------|--|
| Lightning Protection | dc Ground inner/outer conductor |
| Radome Material | ASA, UV stabilized |
| Reflector Material | Aluminum |
| RF Connector Interface | 7-16 DIN Female |
| RF Connector Location | Bottom |
| RF Connector Quantity, total | 10 |
| Wind Loading, maximum | 681.0 N @ 150 km/h 153.1 lbf @ 150 km/h |
| Wind Speed, maximum | 250 km/h 155 mph |

Dimensions

| | |
|----------------------------------|---------------------|
| Depth | 209.0 mm 8.2 in |
| Length | 1599.0 mm 63.0 in |
| Width | 353.0 mm 13.9 in |
| Net Weight, without mounting kit | 24.0 kg 52.9 lb |

Remote Electrical Tilt (RET) Information

| | |
|---|-----------------------------------|
| Input Voltage | 10–30 Vdc |
| Internal RET | High band (4) Low band (1) |
| Power Consumption, idle state, maximum | 2.0 W |
| Power Consumption, normal conditions, maximum | 13.0 W |
| Protocol | 3GPP/AISG 2.0 (Single RET) |
| RET Interface | 8-pin DIN Female 8-pin DIN Male |
| RET Interface, quantity | 1 female 1 male |

Packed Dimensions

| | |
|-----------------|---------------------|
| Depth | 325.0 mm 12.8 in |
| Length | 1787.0 mm 70.4 in |
| Width | 427.0 mm 16.8 in |
| Shipping Weight | 39.0 kg 86.0 lb |

Regulatory Compliance/Certifications

Agency

RoHS 2011/65/EU
China RoHS SJ/T 11364-2006
ISO 9001:2008

Classification

Included Products

T-041-GL-E — Argus® Adjustable Tilt Pipe Mounting Kit for 2.0"-4.5" (50-115mm) OD round members for panel antennas. Includes 2 clamp sets.

* Footnotes

Performance Note Severe environmental conditions may degrade optimum performance

AM-X-CD-14-65-00T-RET (4' 65° Dual Broadband Antenna)

Dual Band Electrical DownTilt Antenna

698 ~ 894MHz, X-pol., H65° / V17.0°

1710 ~ 2170MHz, X-pol., H65° / V8.5°

Electrical Specification

| | | |
|---|---|--|
| Frequency Range | 698-894MHz | 1710-2170MHz |
| Impedance | 50Ω | |
| Polarization | Dual, Slant ±45° | |
| Gain | 14.0dBi / 11.85dBd @ 698-806MHz 14.8dBi / 12.65dBd @ 824-894MHz | 16.1dBi / 13.95dBd @1710-1755MHz 16.3dBi / 14.15dBd @1850-1900MHz 16.0dBi / 13.85dBd @2110-2155MHz |
| Beamwidth | Horizontal | 60° @ 1710-1755MHz 61° @ 1850-1900MHz 64° @ 2110-2155MHz |
| | Vertical | 8.8° @ 1710-1755MHz 8.5° @ 1850-1900MHz 8.0° @ 2110-2155MHz |
| VSWR | ≤1.5:1 | |
| Front-to-Back Ratio | ≥28 dB | |
| Electrical Downtilt Range | 2° ~ 16° | 0° ~ 10° |
| Isolation Between Ports | ≥30 dB | |
| Isolation Between Ports of Different Frequency Elements | ≥35 dB | |
| Cross Pole Discrimination | 10.0 dB @ ±60° 15.0 dB @ 0° | |
| First Upper Side Lobe Suppression | 16dB | |
| Side Lobe Suppression | > 16 dB @ 0-6° Tilt > 18 dB @ 7-12° Tilt (Up to 15° from Boresight) | > 16 dB @ 0-6° Tilt > 18 dB @ 7-10° Tilt (Up to 15° from Boresight) |
| Passive Intermodulation | ≤ -150 dBc @ 2x20w | |
| Input Maximum CW Power | 500 W | 300 W |
| Environmental Compliance | IP65 for Radome IP67 for Connectors | |
| RET Motor Configuration | Field Replaceable RET Electronic Control Module / RET Motor is internal to antenna & not field replaceable | |
| Compliant with AISG 1.1 and 2.0 | AISG 1.1 and 2.0 | |

Mechanical Specification

| | |
|------------------------|--|
| Dimension (WxDxH) | 11.8x5.9x48 inches (300x150x1219mm) |
| Weight (Without clamp) | 36.4 lbs (16.5 kg) |
| Connector | 4 x 7/16 DIN(F), Long Neck |
| Max Wind Speed | 150 mph |
| Wind Load (@150 mph) | 1260 N |

TTAW-07BP111-001

TMA Twin Dual Band AWS with 700 Bypass 13 dB AISG

ELECTRICAL SPECIFICATIONS*

| | |
|---|---|
| UL Frequency Range (MHz) | 1710-1770 with 698-746 bypass |
| UL Rejection | >80 dB TX rejection, >25 dB rejection at 1700 and 1800 MHz |
| UL Gain (dB) | 13 |
| UL Return Loss | >18 dB |
| UL Noise Figure | <1.6 dB |
| UL Output 3rd Order Intercept Point (dBm) | >+23 (Input IP3 >+11) |
| UL Bypass Loss (dB) | <1.9 |
| UL Max Input Power (dBm) | +14 dBm |
| DL Frequency Range (MHz) | 2110-2170 with 698-746 bypass |
| DL Return Loss | >18 dB |
| DL Insertion Loss (dB) | <0.4 |
| Intermodulation | <-155 dBc (2x43 dBm TX) |
| Input Voltage (V) | 8.0-30V (AISG Mode 10-30V; Current Alarm Mode 8-17) |
| Alarm Functionality | AISG compatible or in case of no AISG command received, current alarm mode 170-190 mA |
| Power Consumption | <1.5 W |
| Power Handling, RMS | 700: 500 W; AWS 300W |
| AISG Compatibility | AISG 1.1 fully upgradable to AISG 2.0 (AISG version only depended on loaded SW version) TTAW-07BP112-001 has AISG 2.0 loaded from factory |

MECHANICAL SPECIFICATIONS*

| | |
|-------------------------|--|
| Dimensions HxWxD mm(ft) | 250x169x139 (9.9"x6.7"x5.4") |
| Weight (lbs) | <18 (<8 kg) |
| Colors | Off white (NCS 1502-R) |
| RF Connectors | Female 7/16 DIN, long neck |
| Mounting Kit | Mounting kit for pole and wall is included |

ENVIRONMENTAL SPECIFICATIONS*

| | |
|----------------------|---|
| Temperature Range | -40 to +65°C |
| Operational | ETS 300 019-1-4 |
| Transportation | ETS 300 019-1-2 |
| Storage | ETS 300 019-1-1 |
| Lightning Protection | IEC 61312-1: 2 kA 8/20 μ s, 3 kA 10/350 μ s |
| Housing | Aluminium |
| MTBF | >1 million hours |
| Ingress Protection | IP67 minimum |

APPROVALS AND TESTS*

| | |
|--------|------------------------|
| Safety | UL 60950; UL 1950, TUV |
| EMC | FCC part 15 |



*All specifications subject to change without notice. Please contact your Powerwave representative for complete performance data.



Optimizer® Side-by-Side Dual Polarized Antenna, 1710-2200, 65deg, 18.4dBi, 1.4m, VET, 0-10deg RET

Product Description

A combination of two X-Polarized antennas in a single radome, this pair of variable tilt antennas provides exceptional suppression of all upper sidelobes at all downtilt angles. It also features a wide downtilt range. This antenna is optimized for performance across the entire frequency band (1710-2200 MHz). The antenna comes pre-connected with two antenna control units (ACU).

Features/Benefits

- Variable electrical downtilt - provides enhanced precision in controlling intercell interference. The tilt is infield adjustable 0-10 deg.
- High Suppression of all Upper Sidelobes (Typically <-20dB).
- Gain tracking – difference between AWS UL (1710-1755 MHz) and DL (2110-2155 MHz) <1dB.
- Two X-Polarised panels in a single radome.
- Azimuth horizontal beamwidth difference <4deg between AWS UL (1710-1755 MHz) and DL (2110-2155 MHz).
- Low profile for low visual impact.
- Dual polarization; Broadband design.
- Includes (2) AISG 2.0 Compatible ACU-A20-N antenna control units.



Technical Specifications

Electrical Specifications


| | |
|------------------------------------|---------------------------|
| Frequency Range, MHz | 1710-2200 |
| Horizontal Beamwidth, deg | 65 |
| Vertical Beamwidth, deg | 5.9 to 7.7 |
| Electrical Downtilt, deg | 0-10 |
| Gain, dBi (dBd) | 18.4 (16.3) |
| 1st Upper Sidelobe Suppression, dB | > 18 (typically > 20) |
| Upper Sidelobe Suppression, dB | > 18 all (typically > 20) |
| Front-To-Back Ratio, dB | >26 (typically 28) |
| Polarization | Dual pol +/-45° |
| VSWR | < 1.5:1 |
| Isolation between Ports, dB | > 30 |
| 3rd Order IMP @ 2 x 43 dBm, dBc | > 150 (155 Typical) |
| Impedance, Ohms | 50 |
| Maximum Power Input, W | 300 |
| Lightning Protection | Direct Ground |
| Connector Type | (4) 7-16 Long Neck Female |

Mechanical Specifications


| | |
|--|------------------------------------|
| Dimensions - HxWxD, mm (in) | 1420 x 331 x 80 (55.9 x 13 x 3.15) |
| Weight w/o Mtg Hardware, kg (lb) | 18.5 (40.7) |
| Survival Wind Speed, km/h (mph) | 200 (125) |
| Rated Wind Speed, km/h (mph) | 160 (100) |
| Max Wind Loading Area, m ² (ft ²) | 0.47 (5.03) |
| Front Thrust @ Rated Wind, N (lbf) | 756 (170) |
| Maximum Thrust @ Rated Wind, N (lbf) | 756 (170) |
| Wind Load - Side @ Rated Wind, N (lbf) | 231 (52) |
| Wind Load - Rear @ Rated Wind, N (lbf) | 408 (92) |
| Radome Material | Fiberglass |
| Radome Color | Light Grey RAL7035 |
| Mounting Hardware Material | Diecasted Aluminum |
| Shipping Weight, kg (lb) | 24.5 (53.9) |
| Packing Dimensions, HxWxD, mm (in) | 1520 x 408 x 198 (59.8 x 16 x 7.8) |

Ordering Information

Mounting Hardware APM40-2 + APM40-E2

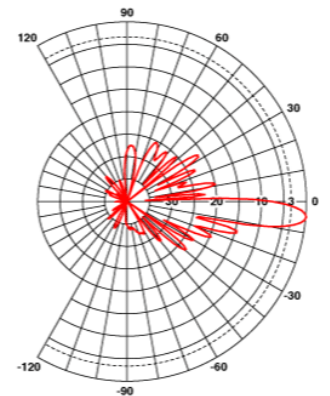

Vertical Pattern

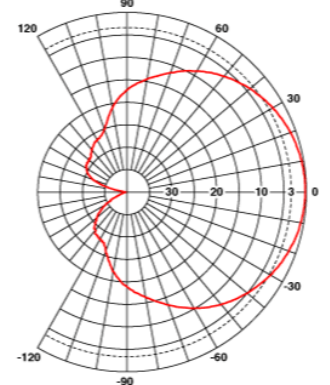

Horizontal Pattern

Other Documentation

- APM40 Series Datasheet
- APM40 Series Installation Instructions

All information contained in the present datasheet is subject to confirmation at time of ordering

Dual Broadband Antenna

90° 1.4 m MET Antenna

806-960/1710-2170 MHz

| | | |
|-------------------------|--|--|
| Part Number: 7770.00 | Horizontal Beamwidth: 90° Gain: 13.5/16 dBi | Electrical Downtilt: Adjustable Connector Type: 7/16 female |
|-------------------------|--|--|

The Powerwave dual band dual polarized broadband antenna has individual adjustable electrical downtilt per band (upgradeable to Remote Electrical Tilt (RET)). Four connector ports allow separate tilts on each frequency band and ensure the use of diversity concepts. The phase shifter technology, based on a patented sliding dielectric, minimizes intermodulation distortion and maximizes efficiency. The slant +/- 45° dual polarization system provides the independent fading signals needed for achieving top-quality coverage via diversity concepts. The Powerwave Broadband antenna design is based on a patented stacked aperture-coupled patch technology, which provides high isolation performance and a wide VSWR bandwidth. The antennas have superior radiation patterns due to a unique reflector design which provides a very small variation of the -3dB horizontal beam width over the frequency band as well as a high front-to-back ratio.



Key Benefits

- Excellent broad- and multi-band capabilities
- Polarization purity makes good diversity gain
- Excellent pattern performance and high gain over frequency
- High passive intermodulation performance
- Light, slim and robust design

Preliminary

ANTENNA
SYSTEMS

BASE STATION
SYSTEMS

COVERAGE
SYSTEMS

Dual Broadband Antenna

Electrical Specifications (Preliminary)

| | | |
|---|--|---|
| Frequency band (MHz) | 806-960 | 1710-2170 |
| Gain, ± 0.5 dB (dBi) | 13.5 | 16.0 |
| Polarization | Dual linear $\pm 45^\circ$ | |
| Nominal Impedance (Ohm) | 50 | |
| VSWR | 1.5:1 | 1.5:1 |
| Isolation between inputs (dB) | 30 | 30 |
| Isolation between inputs (dB) | 40 | |
| Inter band isolation (dB) | 40 | |
| Horizontal -3 dB beamwidth | $85 \pm 5^\circ$ | $85 \pm 5^\circ$ |
| Tracking, Horizontal plane, $\pm 60^\circ$ (dB) | < 2.0 | < 2.0 |
| Tracking, Horizontal plane, $\pm 60^\circ$ (dB) | < 2.0 | |
| Electrical downtilt range (adjustable) | 0° to 10° | 0° to 8° |
| Vertical -3 dB beamwidth | $14.3 \pm 2.0^\circ$ | $6.6 \pm 1^\circ$ |
| Sidelobe suppression, Vertical 1 st upper (dB) | $> 17, 16, 15$ $x=0, 5, 10^\circ$ MET | $> 17, 16, 15$ $x=0, 4, 8^\circ$ MET |
| Vertical beam squint | $< 0.8^\circ$ | $< 0.5^\circ$ |
| First null-fill (dB) | < -25 | < -25 |
| Front-to-back ratio (dB) | > 25 | > 27 |
| Front-to-back ratio, total power (dB) | > 20 | > 23 |
| IM3, 2Tx@43dBm (dBc) | < -153 | < -153 |
| IM3, 2Tx@43dBm (dBc) | | < -153 |
| IM7, 2Tx@43dBm (dBc) | | < -160 |
| Power Handling, Average per input (W) | 400 | 250 |
| Power Handling, Average total (W) | 800 | 500 |

All specifications are subject to change without notice.

Contact your Powerwave representative for complete performance data.

Mechanical Specifications

| | |
|--------------------------------|--------------------------------------|
| Connector Type | 4 x 7/16 DIN female |
| Connector Position | Bottom |
| Dimensions, HxWxD | 1408mm x 280mm x 125mm (55"x11"x5") |
| Weight Including Brackets | 15.8 kg (35 lbs) |
| Wind Load, Frontal, 42m/s Cd=1 | 435N (98 lbf) |
| Survival Wind Speed (m/s) | 70 (156mph) |
| Lightning Protection | DC grounded |
| Radome Material | GRP |
| Radome Color | Light Gray |
| Mounting | Pre-mounted Standard Brackets |
| Packing Size | 1550mm x 355mm x 255mm (61"x14"x10") |

Corporate Headquarters

Powerwave Technologies, Inc.
1801 East St. Andrew Place
Santa Ana, CA 92705 USA

Tel: 714-466-1000
Fax: 714-466-5800
www.powerwave.com

Main European Office

Antennvägen 6
SE-187 80 Täby
Sweden
Tel: +46 8 540 822 00
Fax: +46 8 540 823 40

Main Asia Pacific Office

23 F Tai Yau Building
181 Johnston Road
Wanchai, Hong Kong
Tel: +852 2512 6123
Fax: +852 2575 4860



©Copyright March 2005, Powerwave Technologies, Inc. All Rights reserved. Powerwave, Powerwave Technologies, The Power in Wireless and the Powerwave logo are registered trademarks of Powerwave Technologies, Inc.

COVERAGE AND CAPACITY

TECHNOLOGY LEADERSHIP

GLOBAL PARTNER

INTEGRATED SOLUTIONS

QUALITY AND RELIABILITY

TT19-08BP111-001

TMA Twin 1900 with 850 Bypass 12 dB AISG 1.1

ELECTRICAL SPECIFICATIONS

| | |
|--|---|
| UL Frequency Range (MHz) | 1850-1910 with 824-894 bypass |
| UL Rejection | >77 dB |
| UL Gain(dB) | 12 |
| UL Return Loss | >18 |
| UL Noise Figure | <1.7 dB, Typical |
| UL Output 3rd Order Intercept Point(dBm) | >+23 |
| UL Bypass Loss(dB) | 2.5, Typical |
| UL Max Input Power (dBm) | +14 dBm |
| DL Frequency Range (MHz) | 1930-1990 with 824-894 bypass |
| DL Return Loss | >18 |
| DL Insertion Loss (dB) | 850 MHz, <0.3; 1900 MHz, <0.5 |
| Intermodulation | @ 2 x +43 dBm TX carriers, in receive band, <160 dBc, referred to antenna port |
| Input Voltage (V) | AISG Mode: 10-30; Current alarm mode: 8 -17 |
| Alarm Functionality | AISG compatible or in case of no AISG command received, current alarm mode 170-190 mA |
| Power Consumption | <1.1W @12V |
| Power Handling, RMS | 850: >57 dBm; 1900: >55 dBm |
| AISG Compatibility | AISG 1.1 fully upgradable to AISG 2.0 (AISG version only dependent on loaded SW version) TT19-08BP112-001 has AISG 2.0 loaded from factory |

MECHANICAL SPECIFICATIONS

| | |
|------------------------|--|
| Dimension HxWxD mm(ft) | 250x169x137 mm (9.9"x6.7"x5.4") |
| Weight(lbs) | <16 |
| Colors | Off white (NCS 1502-R) |
| RF Connectors | DIN 7/16 female, long neck |
| Mounting Kit | Mounting kit for pole and wall is included |

ENVIRONMENTAL SPECIFICATIONS

| | |
|----------------------|--------------------------------------|
| Temperature Range | -40° C to +65° C (-40° F to +149° F) |
| Operational | ETS 300 019-1-4 |
| Transportation | ETS 300 019-1-2 |
| Storage | ETS 300 019-1-1 |
| Lightning Protection | 3 kA 10/350 µs; 20 kA (Shield) |
| Housing | Aluminum |
| MTBF | >1 million hours per TMA |
| Ingress Protection | IP65 and IP68 |

APPROVAL AND TESTS

| | |
|--------|-----------------|
| Safety | EN60950 |
| EMC | 3GPP: TS 25.113 |



*All specifications subject to change without notice. Contact your Powerwave representative for complete performance data.

Exhibit E

RADIO FREQUENCY EMISSIONS ANALYSIS REPORT
EVALUATION OF HUMAN EXPOSURE POTENTIAL
TO NON-IONIZING EMISSIONS

T-Mobile Existing Facility

Site ID: CT11356C

CT356/CL&P Tower - RT.123
2 Willruss Street
Norwalk, CT 06850

September 7, 2016

EBI Project Number: 6216003970

| Site Compliance Summary | |
|--|------------------|
| Compliance Status: | COMPLIANT |
| Site total MPE% of FCC general public allowable limit: | 5.31 % |

September 7, 2016

T-Mobile USA
Attn: Jason Overbey, RF Manager
35 Griffin Road South
Bloomfield, CT 06002

Emissions Analysis for Site: **CT11356C – CT356/CL&P Tower - RT.123**

EBI Consulting was directed to analyze the proposed T-Mobile facility located at **2 Willruss Street, Norwalk, CT**, for the purpose of determining whether the emissions from the Proposed T-Mobile Antenna Installation located on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01 and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The number of $\mu\text{W}/\text{cm}^2$ calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits, therefore it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) – (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

General population/uncontrolled exposure limits apply to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general public would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Public exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The general population exposure limit for the 700 MHz Band is approximately 467 $\mu\text{W}/\text{cm}^2$, and the general population exposure limit for the 1900 MHz (PCS) and 2100 MHz (AWS) bands is 1000 $\mu\text{W}/\text{cm}^2$. Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.

Occupational/controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

CALCULATIONS

Calculations were done for the proposed T-Mobile Wireless antenna facility located at **2 Willruss Street, Norwalk, CT**, using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. Since T-Mobile is proposing highly focused directional panel antennas, which project most of the emitted energy out toward the horizon, all calculations were performed assuming a lobe representing the maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was focused at the base of the tower. For this report the sample point is the top of a 6-foot person standing at the base of the tower.

For all calculations, all equipment was calculated using the following assumptions:

- 1) 2 GSM channels (PCS Band - 1900 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel.
- 2) 2 UMTS channels (AWS Band – 2100 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel.
- 3) 2 LTE channels (PCS Band - 1900 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 60 Watts per Channel.
- 4) 2 LTE channels (AWS Band – 2100 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 60 Watts per Channel
- 5) 1 LTE channel (700 MHz Band) was considered for each sector of the proposed installation. This channel has a transmit power of 30 Watts.

- 6) Since all radios are ground mounted there are additional cabling losses accounted for. For each ground mounted RF path the following losses were calculated. 1.19 dB of additional cable loss for all ground mounted 700 MHz Channels, 2.04 dB of additional cable loss for all ground mounted 1900 MHz channels and 2.21 dB of additional cable loss for all ground mounted 2100 MHz channels. This is based on manufacturers Specifications for 170 feet of 1-1/4" coax cable on each path.
- 7) All radios at the proposed installation were considered to be running at full power and were uncombined in their RF transmissions paths per carrier prescribed configuration. Per FCC OET Bulletin No. 65 - Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. This is rarely the case, and if so, is never continuous.
- 8) For the following calculations the sample point was the top of a 6-foot person standing at the base of the tower. The maximum gain of the antenna per the antenna manufactures supplied specifications minus 10 dB was used in this direction. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 9) The antennas used in this modeling are the **RFS APX16DWV-16DWVS-E-A20** for 1900 MHz (PCS) and 2100 MHz (AWS) channels and **Commscope RV4PX306R** for 2100 MHz (AWS) and 700 MHz channels. This is based on feedback from the carrier with regards to anticipated antenna selection. The **RFS APX16DWV-16DWVS-E-A20** has a maximum gain of **16.3 dBd** at its main lobe at 1900 MHz and 2100 MHz. The **Commscope RV4PX306R** has a maximum gain of **13.05 dBd** at its main lobe at 2100 MHz and a maximum gain of **12.05 dBd** at its main lobe at 700 MHz. The maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was used for all calculations. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 10) The antenna mounting height centerline of the proposed antennas is **114 feet** above ground level (AGL).
- 11) Emissions values for additional carriers were taken from the Connecticut Siting Council active database. Values in this database are provided by the individual carriers themselves.
- 12) All calculations were done with respect to uncontrolled / general public threshold limits.

T-Mobile Site Inventory and Power Data

| Sector: | A | Sector: | B | Sector: | C |
|--------------------|--------------------------------|--------------------|--------------------------------|--------------------|--------------------------------|
| Antenna #: | 1 | Antenna #: | 1 | Antenna #: | 1 |
| Make / Model: | RFS APX16DWV-16DWVS-E-A20 | Make / Model: | RFS APX16DWV-16DWVS-E-A20 | Make / Model: | RFS APX16DWV-16DWVS-E-A20 |
| Gain: | 16.3 dBd | Gain: | 16.3 dBd | Gain: | 16.3 dBd |
| Height (AGL): | 114 | Height (AGL): | 114 | Height (AGL): | 114 |
| Frequency Bands | 1900 MHz(PCS) / 2100 MHz (AWS) | Frequency Bands | 1900 MHz(PCS) / 2100 MHz (AWS) | Frequency Bands | 1900 MHz(PCS) / 2100 MHz (AWS) |
| Channel Count | 4 | Channel Count | 4 | Channel Count | 4 |
| Total TX Power(W): | 180 | Total TX Power(W): | 180 | Total TX Power(W): | 180 |
| ERP (W): | 4,800.35 | ERP (W): | 4,800.35 | ERP (W): | 4,800.35 |
| Antenna A1 MPE% | 1.48 | Antenna B1 MPE% | 1.48 | Antenna C1 MPE% | 1.48 |
| Antenna #: | 2 | Antenna #: | 2 | Antenna #: | 2 |
| Make / Model: | Commscope RV4PX306R | Make / Model: | Commscope RV4PX306R | Make / Model: | Commscope RV4PX306R |
| Gain: | 13.05 dBd / 12.05 dBd | Gain: | 13.05 dBd / 12.05 dBd | Gain: | 13.05 dBd / 12.05 dBd |
| Height (AGL): | 114 | Height (AGL): | 114 | Height (AGL): | 114 |
| Frequency Bands | 2100 MHz (AWS) / 700 MHz | Frequency Bands | 2100 MHz (AWS) / 700 MHz | Frequency Bands | 2100 MHz (AWS) / 700 MHz |
| Channel Count | 5 | Channel Count | 5 | Channel Count | 5 |
| Total TX Power(W): | 210 | Total TX Power(W): | 210 | Total TX Power(W): | 210 |
| ERP (W): | 2,549.80 | ERP (W): | 2,644.49 | ERP (W): | 2,549.80 |
| Antenna A2 MPE% | 0.91 | Antenna B2 MPE% | 0.91 | Antenna C2 MPE% | 0.91 |

| Site Composite MPE% | |
|---------------------------|---------------|
| Carrier | MPE% |
| T-Mobile (Per Sector Max) | 2.39 % |
| AT&T | 2.92 % |
| Site Total MPE %: | 5.31 % |

| | |
|--------------------------|---------------|
| T-Mobile Sector A Total: | 2.39 % |
| T-Mobile Sector B Total: | 2.39 % |
| T-Mobile Sector C Total: | 2.39 % |
| Site Total: | 5.31 % |

| T-Mobile_per sector | # Channels | Watts ERP (Per Channel) | Height (feet) | Total Power Density ($\mu\text{W}/\text{cm}^2$) | Frequency (MHz) | Allowable MPE ($\mu\text{W}/\text{cm}^2$) | Calculated % MPE |
|------------------------------|------------|-------------------------|---------------|---|-----------------|---|------------------|
| T-Mobile PCS - 1950 MHz LTE | 2 | 1,600.12 | 114 | 9.86 | PCS - 1950 MHz | 1000 | 0.99% |
| T-Mobile PCS - 1950 MHz GSM | 2 | 800.06 | 114 | 4.93 | PCS - 1950 MHz | 1000 | 0.49% |
| T-Mobile AWS - 2100 MHz LTE | 2 | 728.03 | 114 | 4.49 | AWS - 2100 MHz | 1000 | 0.45% |
| T-Mobile AWS - 2100 MHz UMTS | 2 | 364.02 | 114 | 2.24 | AWS - 2100 MHz | 1000 | 0.22% |
| T-Mobile 700 MHz LTE | 1 | 365.70 | 114 | 1.13 | 700 MHz | 467 | 0.24% |
| | | | | | | Total: | 2.39% |

Summary

All calculations performed for this analysis yielded results that were **within** the allowable limits for general public exposure to RF Emissions.

The anticipated maximum composite contributions from the T-Mobile facility as well as the site composite emissions value with regards to compliance with FCC's allowable limits for general public exposure to RF Emissions are shown here:

| T-Mobile Sector | Power Density Value (%) |
|------------------------------|-------------------------|
| Sector A: | 2.39 % |
| Sector B: | 2.39 % |
| Sector C: | 2.39 % |
| T-Mobile Per Sector Maximum: | 2.39 % |
| | |
| Site Total: | 5.31 % |
| | |
| Site Compliance Status: | COMPLIANT |

The anticipated composite MPE value for this site assuming all carriers present is **5.31%** of the allowable FCC established general public limit sampled at the ground level. This is based upon values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.