



September 19 2014

Melanie A. Bachman
Executive Director
Connecticut Siting Council
10 Franklin Street
New Britain, CT 06051

Regarding : Notice of Exempt Modification – Addition of 3 radio heads previously approved

Property Address: 154 Sayle Avenue, Putnam, CT (the “Property”)

Applicant: New Cingular Wireless PC, LLC (“AT&T”)

Dear Ms. Bachman:

AT&T currently maintains a wireless telecommunications facility on an existing 175 foot Monopole (“tower”) location on the Property. AT&T’s facility consist of nine (9) wireless telecommunications antenna at 134 feet. The tower is owned by SBA Towers, Inc.. The Council approved the previous application on November 16th 2012 reference number EM-CING-116-121031. This application (attached) granted AT&T the use of 6 radio heads at this location. The approval expired one year from the issue date. During that time AT&T made the changes to the site per the approval but only installed three(3) of the six (6) radio heads that they received approval. AT&T would now like to install the additional three(3) radio heads that were originally approved under EM-CING-116-121031.

Please accept this application as notification pursuant to R.C.S.A. § 16-50j-73, for construction that constitutes an exempt modification pursuant to R.C.S.A.§ 16-50j-72 (b)(2). In accordance with R.C.S.A.§ 16-50j-73, a copy of this letter is being sent to the Planning Chairmen for the Town of Putnam. A copy of this letter is also being sent to SBA Towers, Inc, the owner of the structure that AT&T is located.


The planned modifications to AT&T’s facility fall squarely within those activities explicitly provided for in R.C.S.A.§ 16-50j-72 (b)(2).

1. The planned modifications will not result in an increase in the height of the existing structure. AT&T’s additional, previously approved 3 radio heads will be installed at 134 foot level of the 175 foot monopole.
2. The proposed modifications will not involve any changes to ground-mounted equipment and, therefore will not require an extension of the site boundary
3. The proposed modification will not increase the noise level at the facility by six decibel or more, or to levels that exceed state and local criteria.
4. The operation of the modified facility will not increase radio frequency (RF) emissions at the facility to a level at or above the Federal Communications Commission (FCC) safety standard. An RF emissions calculation (attached) for AT&T’s modified facility was provided in the application which led to the November 16th 2012 Decision.

5. The proposed modifications will not cause a change or alteration in the physical or environmental characteristics of the site.
6. The tower and its foundation can support AT&T's proposed modifications (please see attached structural analysis completed by FDH Engineering on October 23rd 2012)

For the foregoing reasons AT&T respectfully request that the proposed addition of 3 radio heads previously approved be allowed within the exempt modifications under R.C.S.A. § 16-50j-72 (b)(2).


Sincerely,



David P. Cooper
Director of Site Acquisition
Empire Telecom

CC: Planning Chairmen for the Town of Putnam, SBA Towers, Inc.
CT1110 file

16 Esquire Road, Billerica, MA 01862 Mobile: 617-639-4908 Email: dcooper@empiretelecomm.com



STATE OF CONNECTICUT
CONNECTICUT SITING COUNCIL

Ten Franklin Square, New Britain, CT 06051
Phone: (860) 827-2935 Fax: (860) 827-2950
E-Mail: siting.council@ct.gov
www.ct.gov/csc

November 16, 2012

Peter LaMontagne
New Cingular Wireless PCS, LLC
95 Ryan Drive, Suite #1
Raynham, MA 02767

RE: **EM-CING-116-121031** - New Cingular Wireless PCS, LLC notice of intent to modify an existing telecommunications facility located at 154 Sayle Avenue, Putnam, Connecticut.


Dear Mr. LaMontagne:

The Connecticut Siting Council (Council) hereby acknowledges your notice to modify this existing telecommunications facility, pursuant to Section 16-50j-73 of the Regulations of Connecticut State Agencies with the following conditions:

- The coax lines and accessory equipment shall be installed in accordance with the recommendations made in the Structural Analysis Report prepared by FDH Engineering dated October 23, 2012 and stamped by Christopher Murphy; and
- Not more than 45 days following completion of the antenna installation, a signed letter from a Professional Engineer duly licensed in the State of Connecticut shall be submitted to the Council to certify that the recommended modifications have been completed and the tower does not exceed 100 percent of the post-construction structural rating.
- Any deviation from the proposed modification as specified in this notice and supporting materials with Council shall render this acknowledgement invalid;
- Any material changes to this modification as proposed shall require the filing of a new notice with the Council;
- Not less than 45 days after completion of construction, the Council shall be notified in writing that construction has been completed;
- The validity of this action shall expire one year from the date of this letter; and
- The applicant may file a request for an extension of time beyond the one year deadline provided that such request is submitted to the Council not less than 60 days prior to the expiration;

The proposed modifications including the placement of all necessary equipment and shelters within the tower compound are to be implemented as specified here and in your notice dated October 25, 2012. The modifications are in compliance with the exception criteria in Section 16-50j-72 (b) of the Regulations of Connecticut State Agencies as changes to an existing facility site that would not increase tower height, extend the boundaries of the tower site, increase noise levels at the tower site boundary by six decibels, and increase the total radio frequencies electromagnetic radiation power density measured at the tower site boundary to or above the standard adopted by the State Department of Environmental Protection pursuant to General Statutes § 22a-162. This facility has also been carefully modeled to ensure that radio frequency





STATE OF CONNECTICUT
CONNECTICUT SITING COUNCIL

Ten Franklin Square, New Britain, CT 06051

Phone: (860) 827-2935 Fax: (860) 827-2950

E-Mail: siting.council@ct.gov

www.ct.gov/csc

October 31, 2012

The Honorable Richard "Pete" Place
Mayor
Town of Putnam
126 Church Street
Putnam, CT 06260

RE: **EM-CING-116-121031** - New Cingular Wireless PCS, LLC notice of intent to modify an existing telecommunications facility located at 154 Sayle Avenue, Putnam, Connecticut.

Dear Mayor Place:

The Connecticut Siting Council (Council) received a request to modify an existing telecommunications facility, pursuant to Regulations of Connecticut State Agencies Section 16-50j-72. A copy of which has already been provided to you.

If you have any questions or comments regarding the proposal, please call me or inform the Council by November 14, 2012.

Thank you for your cooperation and consideration.

Very truly yours,

A handwritten signature in black ink that reads "L. Roberts".

Linda Roberts
Executive Director

LR/cm

c: Gerard Cotnoir, Planning Chairman, Town of Putnam



FDH Engineering, Inc., 6521 Meridien Drive Raleigh, NC 27616, Ph. 919.755.1012

**Structural Analysis for
SBA Network Services, Inc.**

175' Monopole Tower

**SBA Site Name: Putnam
SBA Site ID: CT00680-S
AT&T Site ID: CT1110**

FDH Project Number 12-01602E S3 (R1)

Analysis Results

Tower Components	97.1%	Sufficient
Foundation	83.3%	Sufficient


Prepared By:

Logan Poe, EI
Project Engineer

Reviewed By:

Christopher M Murphy, PE
President
CT PE License No. 25842

FDH Engineering, Inc.
6521 Meridien Drive
Raleigh, NC 27616
(919) 755-1012
info@fdh-inc.com

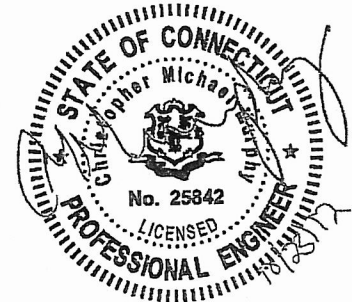

October 23, 2012

Prepared pursuant to TIA/EIA-222-F Structural Standards for Steel Antenna Towers and Antenna Supporting Structures and 2005 Connecticut Building Code

TABLE OF CONTENTS

EXECUTIVE SUMMARY 3
 Conclusions 3
 Recommendations 4
APPURTENANCE LISTING 5
RESULTS 6
GENERAL COMMENTS 6
LIMITATIONS 7
APPENDIX 7

EXECUTIVE SUMMARY

At the request of SBA Network Services, Inc., FDH Engineering, Inc. performed a structural analysis of the monopole located in Putnam, CT to determine whether the tower is structurally adequate to support both the existing and proposed loads pursuant to the *Structural Standards for Steel Antenna Towers and Antenna Supporting Structures, TIA/EIA-222-F and 2005 Connecticut Building Code (CBC)*. Information pertaining to the existing/proposed antenna loading, current tower geometry, geotechnical data, and member sizes was obtained from:

- Fred A. Nudd Corporation (Drawing No. 98-6220-1) original design drawings dated November 12, 1998
- Fred A. Nudd Corporation (Drawing No. 98-6220-2) Foundation Details dated November 12, 1998
- Jaworski Geotech, Inc. (Project No. C98291G) Geotechnical Evaluation dated August 4, 1998
- Vertical Structures, Inc. (Job No. 2008-007-034) Structural Analysis Report dated November 21, 2008
- o2wireless Solutions (Job No. 2230-019) Monopole Tower Rework Construction Drawings dated May 30, 2002
- o2wireless Solutions (Job No. 2230-019B) Monopole Tower Structural Analysis Report dated May 28, 2002
- FDH Engineering, Inc. (Job No. 12-004253T C1) TIA Inspection Report dated July 27, 2012
- FDH Engineering, Inc. (Job No. 12-01602E S2) Modification Drawings dated April 30, 2012
- FDH Engineering, Inc. (Job No. 12-04253TC1) Modification Inspection Report dated July 24, 2012
- SBA Network Services, Inc.

The *basic design wind speed* per the *TIA/EIA-222-F* standards and 2005 CBC is 85 mph without ice and 38 mph with 1" radial ice. Ice is considered to increase in thickness with height.

Conclusions

With the existing and proposed antennas from New Cingular in place at 134 ft, the tower meets the requirements of the *TIA/EIA-222-F* standards and 2005 CBC provided the **Recommendations** listed below are satisfied. Furthermore, provided the foundations were constructed per the original design drawings (see Fred A. Nudd Corporation Drawing No. 98-6220-2) and utilizing the existing soil parameters (see Jaworski Geotech, Inc. Project No. C98291G), the foundations should have the necessary capacity to support the existing and proposed loading. For a more detailed description of the analysis of the tower, see the **Results** section of this report.

Our structural analysis has been performed assuming all information provided to FDH Engineering, Inc. is accurate (i.e., the steel data, tower layout, existing antenna loading, and proposed antenna loading) and that the tower has been properly erected and maintained per the original design drawings.

Recommendations

To ensure the requirements of the *TIA/EIA-222-F* standards and 2005 CBC are met with the existing and proposed loading in place, we have the following recommendations:

1. The proposed coax should be installed inside the pole's shaft.
2. RRU/RRH Stipulation: The equipment may be installed in any arrangement as determined by the client.
3. The existing TMAs should be installed directly behind the proposed panel antennas.

APPURTENANCE LISTING

The proposed and existing antennas with their corresponding cables/coax lines are shown in **Table 1**. *If the actual layout determined in the field deviates from the layout, FDH Engineering, Inc. should be contacted to perform a revised analysis.*

Table 1 - Appurtenance Loading

Existing Loading:

Antenna Elevation (ft)	Description	Coax and Lines ¹	Carrier	Mount Elevation (ft)	Mount Type
191.5	(6) EMS RR90-17-02DP w/ Mount Pipe (6) Allen Telecom FE15501P77775 MHAs	(12) 1 5/8	T-Mobile	175	(3) 24' x 4.5" Pipe Mounts
179	(6) Decibel DB980H90 w/ Mount Pipe	(6) 1 5/8	Sprint	175	(1) 14.5' Low Profile Platform
162	(9) Allgon ALP 9212 w/ Mount Pipe	(9) 1 5/8	Nextel	160	(1) 14.5' Low Profile Platform
147	(3) Antel BXA-70063/6CF w/ Mount Pipe (6) Antel LPA-80080/4CF w/ Mount Pipe (3) Antel BXA-171085-12BF w/ Mount Pipe (6) RFS FD9R6004/2C-3L Diplexers	(12) 1 5/8	Verizon	147	(1) 14.5' Low Profile Platform
137.5	(6) Powerwave 7770 w/ Mount Pipe (6) Ppowerwave LGP21401 TMAs (6) Powerwave LGP21901 Diplexers	(12) 1 5/8	AT&T	135	(1) 14.5' Low Profile Platform

1. Coax installed inside the pole's shaft unless otherwise noted.

Proposed Loading:

Antenna Elevation (ft)	Description	Coax and Lines	Carrier	Mount Elevation (ft)	Mount Type
134	(6) Powerwave 7770.00 w/Mount Pipe (3) KMW AM-X-CD-17-65-00T w/ Mount Pipe (1) Nokia CS72188.01 (6) Powerwave LGP21401 TMAs (6) Powerwave LGP21901 Diplexers	(12) 1-5/8" (2) 3/4" DC Power (1) 7/16" Fiber (1) 1/2" RET	AT&T	135	(1) 14.5' Low Profile Platform
	133			(1) Valmont Universal Ring Mount	

RESULTS

The following yield strength of steel for individual members was used for analysis:

Table 2 - Material Strength

Member Type	Yield Strength
Tower Shaft Sections	56 ksi & 65 ksi
Base Plate	50 ksi
Anchor Bolts	F _u = 125 ksi

Table 3 displays the summary of the ratio (as a percentage) of force in the member to their capacities. Values greater than 100% indicate locations where the maximum force in the member exceeds its capacity. *Note: Capacities up to 105% are considered acceptable.* **Table 4** displays the maximum foundation reactions.

If the assumptions outlined in this report differ from actual field conditions, FDH Engineering, Inc. should be contacted to perform a revised analysis. Furthermore, as no information pertaining to the allowable twist and sway requirements for the existing or proposed appurtenances was provided, deflection and rotation were not taken into consideration when performing this analysis.

See the **Appendix** for detailed modeling information

Table 3 - Summary of Working Percentage of Structural Components

Section No.	Elevation ft.	Component Type	Size	% Capacity	Pass/Fail
L1	175 - 150	Pole	TP27.625x18x0.25	36.8	Pass
L2	150 - 125	Pole	TP31.425x25.2x0.25	92.8	Pass
L3	125 - 115	Pole	TP33.5x31.425x0.3125	80.4	Pass
L4	115 - 80	Pole (w/Modifications)	TP39.3819x31.8375x0.3125	97.0	Pass
L5	80 - 70	Pole (w/Modifications)	TP41.0625x39.3819x0.375	81.0	Pass
L6	70 - 35	Pole (w/Modifications)	TP46.8125x39.4722x0.375	95.4	Pass
L7	35 - 0	Pole (w/Modifications)	TP52.3x44.9615x0.4375	97.1	Pass
		Anchor Bolts	(18) 2" \emptyset and (18) 1.25" w/BC=61"	91.3	Pass
		Base Plate	67" \emptyset PL. x 1.5" Thk. w/stiffeners	34.1	Pass

*Capacities include 1/3 allowable stress increase for wind per TIA/EIA-222-F standards.

Table 4 - Maximum Base Reactions

Base Reactions	Current Analysis (TIA/EIA-222-F)
Axial	54 k
Shear	43 k
Moment	5,088 k-ft

* Foundation determined to be adequate per independent analysis.

GENERAL COMMENTS

This engineering analysis is based upon the theoretical capacity of the structure. It is not a condition assessment of the tower and its foundation. It is the responsibility of SBA Network Services, Inc. to verify that the tower modeled and analyzed is the correct structure (with accurate antenna loading information) modeled. If there are substantial modifications to be made or the assumptions made in this analysis are not accurate, FDH Engineering, Inc. should be notified immediately to perform a revised analysis.

LIMITATIONS

All opinions and conclusions are considered accurate to a reasonable degree of engineering certainty based upon the evidence available at the time of this report. All opinions and conclusions are subject to revision based upon receipt of new or additional/updated information. All services are provided exercising a level of care and diligence equivalent to the standard and care of our profession. No other warranty or guarantee, expressed or implied, is offered. Our services are confidential in nature and we will not release this report to any other party without the client's consent. The use of this engineering work is limited to the express purpose for which it was commissioned and it may not be reused, copied, or distributed for any other purpose without the written consent of FDH Engineering, Inc.

APPENDIX

DESIGNED APPURTENANCE LOADING

TYPE	ELEVATION	TYPE	ELEVATION
Lightning Rod	175	BXA-171085-12BF w/Mount Pipe (Verizon)	147
(2) RR90-17-02DP w/ Mount Pipe (T-Mobile)	175	BXA-171085-12BF w/Mount Pipe (Verizon)	147
(2) RR90-17-02DP w/ Mount Pipe (T-Mobile)	175	BXA-171085-12BF w/Mount Pipe (Verizon)	147
(2) RR90-17-02DP w/ Mount Pipe (T-Mobile)	175	(2) FD9R6004/2C-3L Diplexer (Verizon)	147
(2) Allen Telecom FE15501P7775 MHAs (T-Mobile)	175	(2) FD9R6004/2C-3L Diplexer (Verizon)	147
(2) Allen Telecom FE15501P7775 MHAs (T-Mobile)	175	(2) FD9R6004/2C-3L Diplexer (Verizon)	147
(2) Allen Telecom FE15501P7775 MHAs (T-Mobile)	175	Low Profile Platform (Verizon)	147
24" x 4.5" Pipe Mount (T-Mobile)	175	(2) 7770.00 w/Mount Pipe (ATI)	135
24" x 4.5" Pipe Mount (T-Mobile)	175	(2) 7770.00 w/Mount Pipe (ATI)	135
24" x 4.5" Pipe Mount (T-Mobile)	175	(2) 7770.00 w/Mount Pipe (ATI)	135
(2) Decibel DB980H90 w/ Mount Pipe (Sprint)	175	AM-X-CD-17-65-00T-RET w/ Mount Pipe (ATI)	135
(2) Decibel DB980H90 w/ Mount Pipe (Sprint)	175	AM-X-CD-17-65-00T-RET w/ Mount Pipe (ATI)	135
(2) Decibel DB980H90 w/ Mount Pipe (Sprint)	175	AM-X-CD-17-65-00T-RET w/ Mount Pipe (ATI)	135
Low Profile Platform (Sprint)	175	CS72188.01 LMU (ATI)	135
(3) Allgon ALP 9212 w/ Mount Pipe (Nextel)	160	(2) LGP21401 TMA (ATI)	135
(3) Allgon ALP 9212 w/ Mount Pipe (Nextel)	160	(2) LGP21401 TMA (ATI)	135
(3) Allgon ALP 9212 w/ Mount Pipe (Nextel)	160	(2) LGP21401 TMA (ATI)	135
Low Profile Platform (Nextel)	160	(2) RRUS 11 (ATI)	135
BXA-70063/6CF W/Mount Pipe (Verizon)	147	(2) RRUS 11 (ATI)	135
BXA-70063/6CF W/Mount Pipe (Verizon)	147	(2) RRUS 11 (ATI)	135
BXA-70063/6CF W/Mount Pipe (Verizon)	147	(2) Powerwave LGP21901 Diplexer (ATI)	135
BXA-70063/6CF W/Mount Pipe (Verizon)	147	(2) Powerwave LGP21901 Diplexer (ATI)	135
(2) LPA-80080/4CF W/Mount Pipe (Verizon)	147	Raycap DC2-48-60-18-8F Surge Arrestor (ATI)	135
(2) LPA-80080/4CF W/Mount Pipe (Verizon)	147	Empty Pipe Mount (ATI)	135
(2) LPA-80080/4CF W/Mount Pipe (Verizon)	147	Low Profile Platform (ATI)	135
		Universal Ring Mount (ATI)	133


MATERIAL STRENGTH

GRADE	Fy	Fu	GRADE	Fy	Fu
A572-65	65 ksi	80 ksi	A36M-56	56 ksi	65 ksi

TOWER DESIGN NOTES

1. Tower is located in Windham County, Connecticut.
2. Tower designed for a 85 mph basic wind in accordance with the TIA/EIA-222-F Standard.
3. Tower is also designed for a 38 mph basic wind with 1.00 in ice. Ice is considered to increase in thickness with height.
4. Deflections are based upon a 50 mph wind.

Section	Length (ft)	Number of Sides	Thickness (in)	Socket Length (ft)	Top Dia (in)	Bot Dia (in)	Grade	Weight (K)
1	25.00	12	0.2500	5.00	18.0000	27.6250	A572 65	1.5
2	30.00	12	0.2500	5.00	25.2000	31.4250	A572 65	2.3
3	10.00	12	0.3125	5.00	31.4250	33.5000	A572 65	1.1
4	40.00	12	0.3125	5.00	31.8375	39.3819	A572 65	4.8
5	10.00	12	0.3750	5.00	39.3819	41.0625	A36M-56	1.6
6	40.00	12	0.3750	6.00	39.4722	46.8125	A36M-56	7.0
7	41.00	12	0.4375	6.00	44.9615	52.3000	A36M-56	9.5

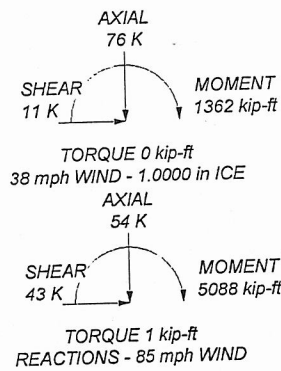

 FDH Engineering Tower Analysis	6521 Meridian Drive Raleigh, NC 27616 Phone: (919)-755-1012 FAX: (919)-755-1031		Job: Putnam, CT00680-S Project: 12-01602E S3	
	Client: SBA Network Services, Inc	Drawn by: Logan Po	App'd:	
	Code: TIA/EIA-222-F	Date: 09/14/12	Scale: NTS	
	Path:			
			Dwg No. E-1	

EM-CING-116-121031




New Cingular Wireless
CS, LLC
10 Enterprise Drive
Rocky Hill, Connecticut 06067

Peter LaMontagne
Real Estate Consultant
95 Ryan Drive, Suite #1
Raynham, MA 02767
Phone: (508)341-7854
plamontagne@clinellc.com

October 25, 2012

Honorable Robert Stein, Chairman,
and Members of the Connecticut Siting Council
Connecticut Siting Council
10 Franklin Square
New Britain, Connecticut 06051

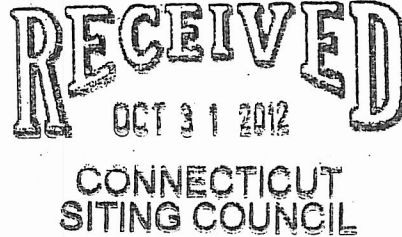

Re: Notice of Exempt Modification – Existing Telecommunications Facility at 154 Sayle Avenue, Putnam, CT 06260

Dear Chairman Stein and Members of the Council:

New Cingular Wireless PCS, LLC (“AT&T”) intends to modify their existing telecommunications antennas and associated equipment at an existing multicarrier telecommunications tower located at 154 Sayle Avenue in Putnam, CT. AT&T operates under licenses issued by the Federal Communications Commission (“FCC”) to provide cellular and PCS mobile telephone service in Windham County, which includes the area to be served by AT&T’s proposed installation.

In order to accommodate technological changes, implement Long Term Evolution (“LTE”) capabilities, and enhance system performance in the State of Connecticut, New Cingular Wireless PCS, LLC (“AT&T”) plans to modify the equipment configurations at many of its existing cell sites. LTE is a new high-performance air interface for cellular mobile communications. It is designed to increase the capacity and speed of mobile telephone networks.

Please accept this letter as notification to the Council, pursuant to R.C.S.A. Section 16-50j-73, of construction which constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2). In compliance with R.C.S.A. Section 16-50j-73, a copy of this letter is being sent to Peter Place, Mayor of Putnam.

Attached is a summary of the planned modifications, including power density calculations reflecting the change in AT&T’s operations at the facility. Also included is documentation of the structural sufficiency of the tower to accommodate the revised antenna configuration.

Existing Facility

The Putnam facility is located at 154 Sayle Avenue on the west side of Interstate 395. Site coordinates (NAD83) are N41° 55' 46" and W71° 53' 10.6".

The facility is owned by SBA Towers, 5900 Broken Sound Parkway N.W, 2nd Floor, Boca Raton, FL, 33487-2797.

The existing facility consists of a 175' monopole tower with an existing chain link fence around the tower compound. AT&T currently operates wireless communications equipment at the facility and has six antennas mounted on the tower at a centerline of 134'.

Statutory Considerations

The changes to the Putnam tower facility do not constitute a modification as defined in Connecticut General Statutes ("C.G.S.") Section 16-50i(d) because the general physical characteristics of the facility will not be significantly changed or altered. Rather, the planned changes to the facility fall squarely within those activities explicitly provided for in R.C.S.A. Section 16-50j-72(b)(2) because they will not result in any substantial adverse environmental effect.

1. The height of the overall structure will be unaffected.
2. The proposed changes will not affect the property boundaries. All new construction will take place inside the existing fenced compound.
3. The proposed additions will not increase the noise level at the existing facility by six decibels or more.
4. LTE will utilize additional radio frequencies newly licensed by the FCC for cellular mobile communications. However, the changes will not increase the calculated "worst case" power density for the combined operations at the site to a level at or above the applicable standard for uncontrolled environments as calculated for a mixed frequency site.

For the foregoing reasons, New Cingular Wireless respectfully submits that the proposed changes at the referenced site constitute exempt modifications under R.C.S.A Section §16-50j-72(b)(2).

Respectfully yours,



Peter LaMontagne
Real Estate Consultant

Enclosures:

Peter Place, Mayor of Putnam



**New Cingular Wireless
PCS, LLC**
500 Enterprise Drive
Rocky Hill, Connecticut 06067

Peter LaMontagne
Real Estate Consultant
95 Ryan Drive, Suite #1
Raynham, MA 02767
Phone: (508)341-7854
plamontagne@clinellc.com

October 26, 2012

Peter Place, Mayor
Town of Putnam
126 Church Street
Putnam, CT 06260

Re: Notice of Exempt Modification – Existing Telecommunications Facility at 154 Sayle Avenue, Putnam, CT 06260

Dear Peter Place, Mayor of Putnam

New Cingular Wireless PCS, LLC (“AT&T”) intends to add telecommunications antennas and associated equipment at an existing telecommunications tower, owned and operated by SBA Towers, 5900 Broken Sound Parkway N.W, 2nd Floor, Boca Raton, FL, 33487-2797.

A Notice of Exempt Modification has been filed with the Connecticut Siting Council as required by Regulations of Connecticut State Agencies (“R.C.S.A.”) Section 16-50j-73. Please accept this letter as notification to the Town of Putnam under Section 16-50j-73 of construction which constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2).

The attached letter fully sets forth AT&T’s proposal. However, if you have any questions or require any further information on the plans for the site or the Siting Council’s procedures, please contact Peter LaMontagne, Real Estate Consultant for AT&T, at (508) 341-7854 or Linda Roberts, Executive Director of the Connecticut Siting Council, at (860) 827-2935.

Sincerely,


Peter LaMontagne
Real Estate Consultant

Enclosure


Honorable Robert Stein, Chairmen of the Connecticut Siting Council

CT11110 / Putnam / 154 Sayle Avenue, Putnam, CT

Aerial Location Map

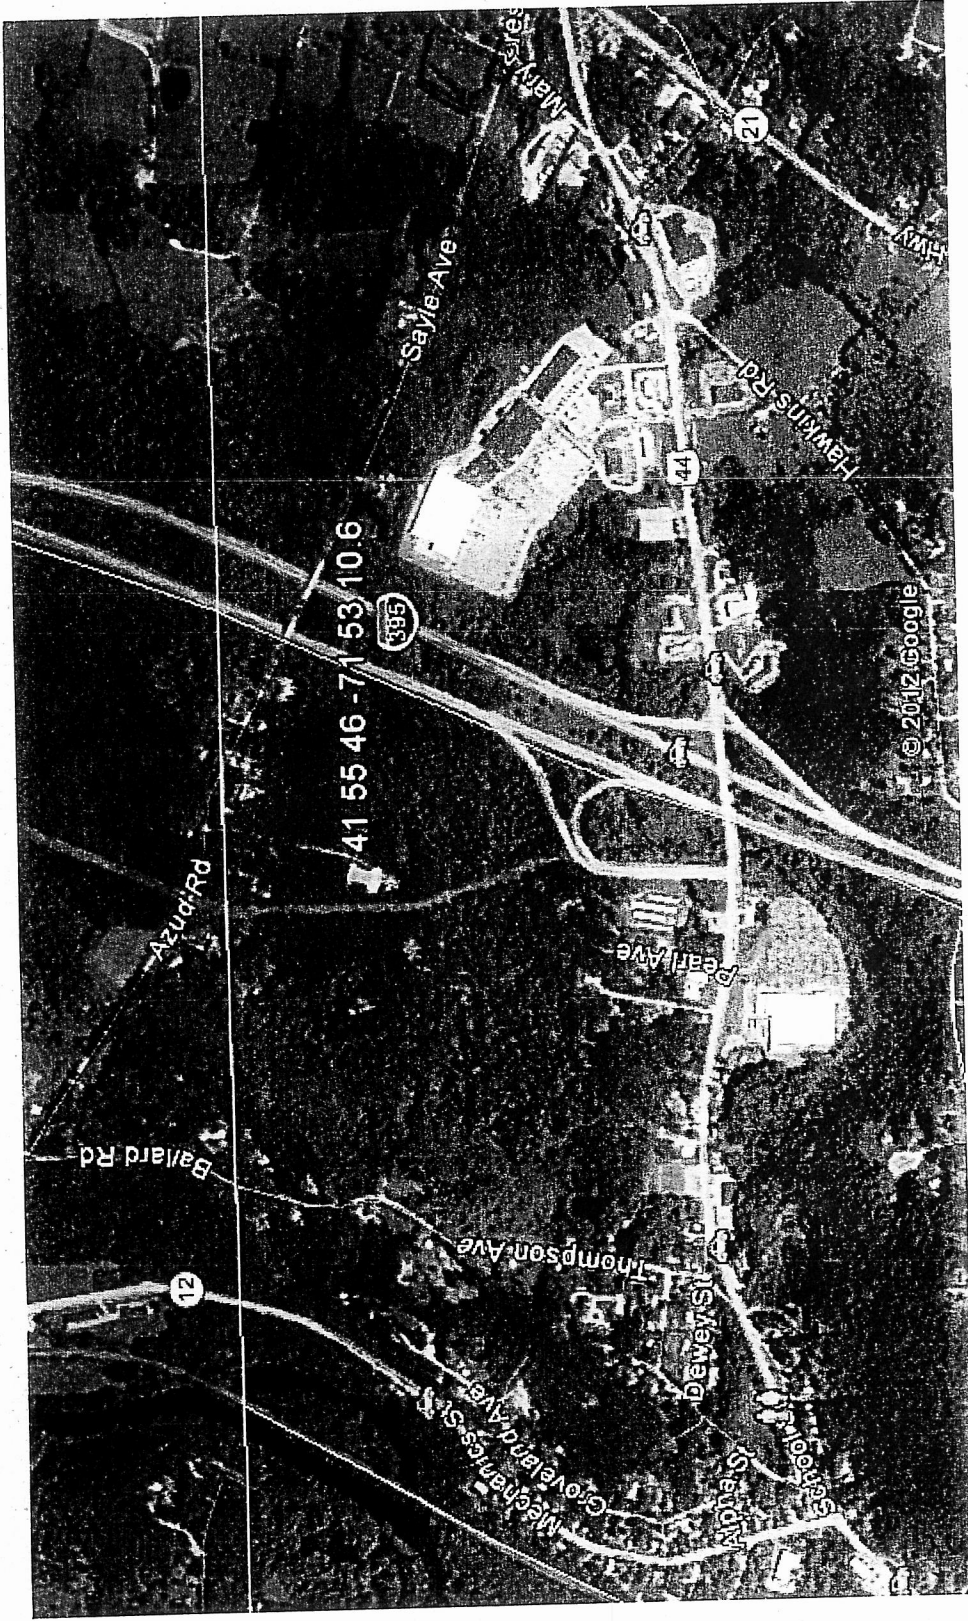


Street Location Map

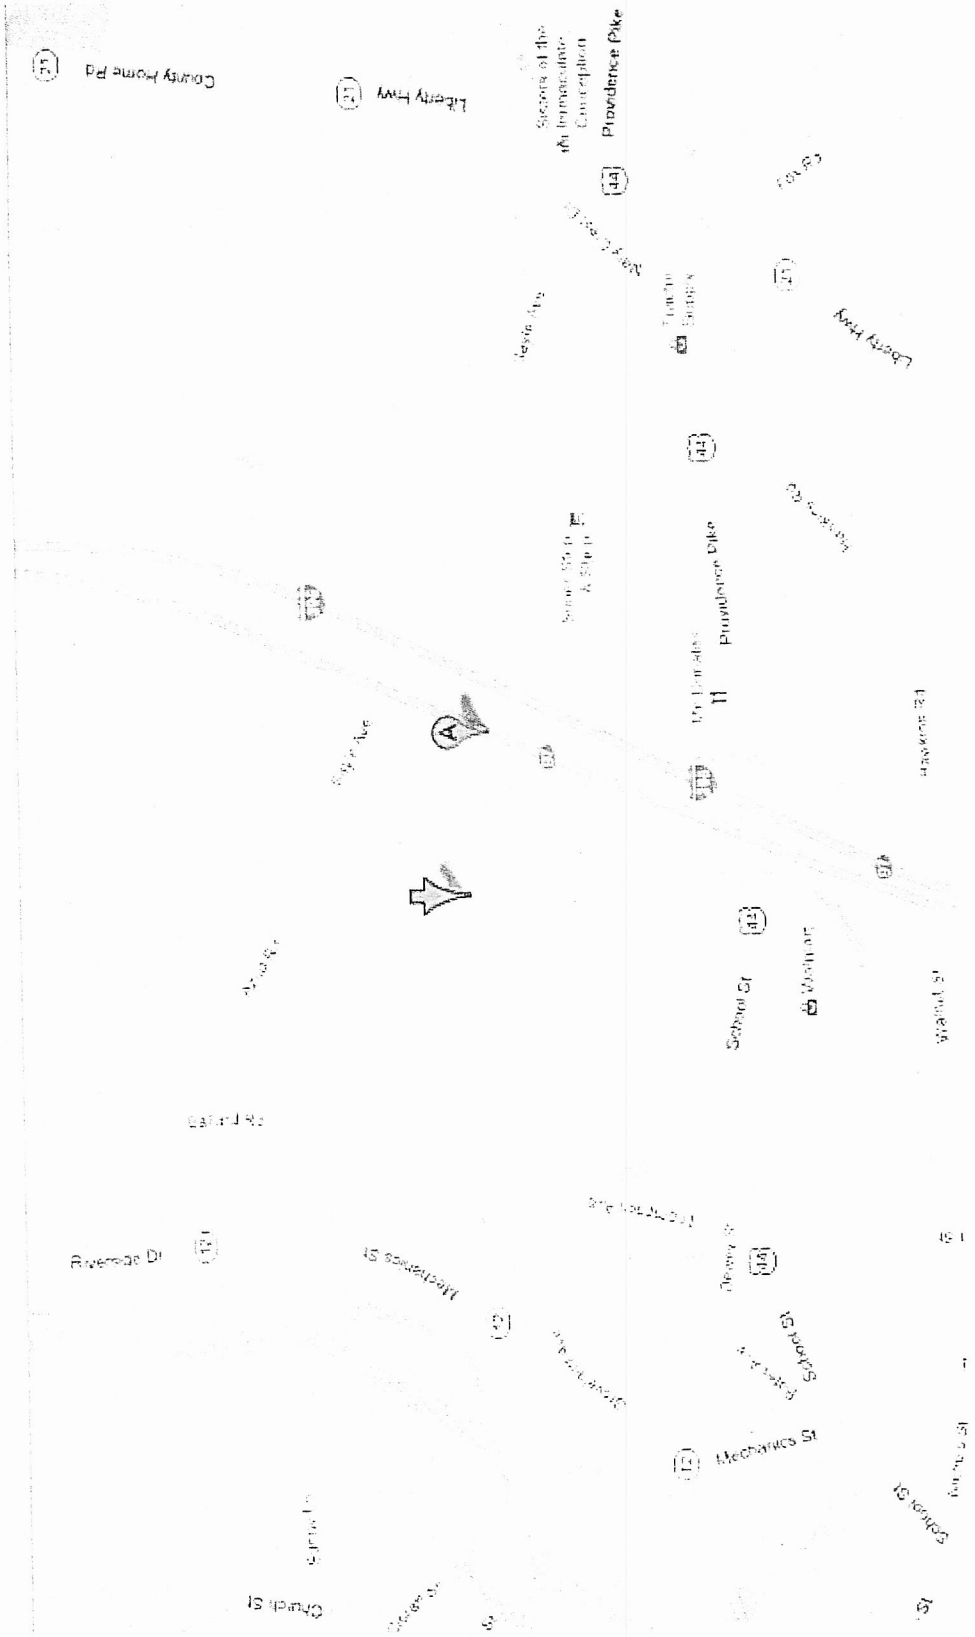



C Squared Systems, LLC
65 Dartmouth Drive, Unit A3
Auburn, NH 03032
(603) 644-2800
support@csquaredsystems.com

Calculated Radio Frequency Emissions



at&t

CT1110

(Putnam)

154 Sayle Avenue, Putnam, CT 06260

October 25, 2012

Table of Contents

1. Introduction.....	1
2. FCC Guidelines for Evaluating RF Radiation Exposure Limits.....	1
3. RF Exposure Prediction Methods.....	2
4. Calculation Results.....	3
5. Conclusion.....	4
6. Statement of Certification.....	4
Attachment A: References.....	5
Attachment B: FCC Limits for Maximum Permissible Exposure (MPE).....	6
Attachment C: AT&T Antenna Data Sheets and Electrical Patterns.....	8

List of Tables

Table 1: Carrier Information.....	3
Table 2: FCC Limits for Maximum Permissible Exposure (MPE).....	6

List of Figures

Figure 1: Graph of FCC Limits for Maximum Permissible Exposure (MPE).....	7
---	---

1. Introduction

The purpose of this report is to investigate compliance with applicable FCC regulations for the proposed modifications to the existing AT&T antenna arrays mounted on the monopole tower located at 154 Sayle Avenue in Putnam, CT. The coordinates of the tower are 41° 55' 46.00" N, 71° 53' 10.70" W.

AT&T is proposing the following modifications:

- 1) Install three multi-band (700/850/1900/2100 MHz) antennas (one per sector) for their LTE network.

2. FCC Guidelines for Evaluating RF Radiation Exposure Limits

In 1985, the FCC established rules to regulate radio frequency (RF) exposure from FCC licensed antenna facilities. In 1996, the FCC updated these rules, which were further amended in August 1997 by OET Bulletin 65 Edition 97-01. These new rules include Maximum Permissible Exposure (MPE) limits for transmitters operating between 300 kHz and 100 GHz. The FCC MPE limits are based upon those recommended by the National Council on Radiation Protection and Measurements (NCRP), developed by the Institute of Electrical and Electronics Engineers, Inc., (IEEE) and adopted by the American National Standards Institute (ANSI).

The FCC general population/uncontrolled limits set the maximum exposure to which most people may be subjected. General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

Public exposure to radio frequencies is regulated and enforced in units of milliwatts per square centimeter (mW/cm^2). The general population exposure limits for the various frequency ranges are defined in the attached "FCC Limits for Maximum Permissible Exposure (MPE)" in Attachment B of this report.

Higher exposure limits are permitted under the occupational/controlled exposure category, but only for persons who are exposed as a consequence of their employment and who have been made fully aware of the potential for exposure, and they must be able to exercise control over their exposure. General population/uncontrolled limits are five times more stringent than the levels that are acceptable for occupational, or radio frequency trained individuals. Attachment B contains excerpts from OET Bulletin 65 and defines the Maximum Exposure Limit.

Finally, it should be noted that the MPE limits adopted by the FCC for both general population/uncontrolled exposure and for occupational/controlled exposure incorporate a substantial margin of safety and have been established to be well below levels generally accepted as having the potential to cause adverse health effects.

3. RF Exposure Prediction Methods

The emission field calculation results displayed in the following figures were generated using the following formula as outlined in FCC bulletin OET 65:

$$\text{Power Density} = \left(\frac{1.6^2 \times \text{EIRP}}{4\pi \times R^2} \right) \times \text{Off Beam Loss}$$

Where:

EIRP = Effective Isotropic Radiated Power

R = Radial Distance = $\sqrt{(H^2 + V^2)}$

H = Horizontal Distance from antenna in meters

V = Vertical Distance from radiation center of antenna in meters

Ground reflection factor of 1.6

Off Beam Loss is determined by the selected antenna pattern

These calculations assume that the antennas are operating at 100 percent capacity and power, and that all channels are transmitting simultaneously. Obstructions (trees, buildings, etc.) that would normally attenuate the signal are not taken into account. The calculations assume even terrain in the area of study and do not take into account actual terrain elevations which could attenuate the signal. As a result, the predicted signal levels reported below are much higher than the actual signal levels will be from the finished modifications.

4. Calculation Results

Table 1 below outlines the power density information for the site. Because the proposed AT&T antennas are directional in nature, the majority of the RF power is focused out towards the horizon. As a result, there will be less RF power directed below the antennas relative to the horizon, and consequently lower power density levels around the base of the tower. Please refer to Attachment C for the vertical pattern of the proposed AT&T antennas. The calculated results for AT&T in Table 1 include a nominal 10 dB off-beam pattern loss to account for the lower relative gain below the antennas.

Carrier	Antenna Height (Feet)	Operating Frequency (MHz)	Number of Trans.	ERP Per Transmitter (Watts)	Power Density (mw/cm ²)	Limit	%MPE
Cingular UMTS	134	880	1	500	0.0100	0.5867	1.71%
Cingular GSM	134	880	4	296	0.0237	0.5867	4.04%
Cingular GSM	134	1900	2	427	0.0171	1.0000	1.71%
MetroPCS	124	2140	3	443.61	0.0311	1.0000	3.11%
Sprint	175	1962	11	122	0.0158	1.0000	1.58%
Nextel	159	858	9	100	0.0128	0.5720	2.24%
Verizon PCS	147	1970	11	246	0.0450	1.0000	4.50%
Verizon cellular	147	869	9	254	0.0380	0.5793	6.57%
Verizon AWS	147	2145	1	586	0.0098	1.0000	0.98%
Verizon LTE	147	698	1	834	0.0139	0.4653	2.98%
VoiceStream	187	1930	4	277	0.0114	1.0000	1.14%
AT&T UMTS	134	880	2	565	0.0023	0.5867	0.39%
AT&T UMTS	134	1900	2	875	0.0035	1.0000	0.35%
AT&T LTE	134	734	1	1771	0.0035	0.4893	0.72%
AT&T GSM	134	880	1	283	0.0006	0.5867	0.10%
AT&T GSM	134	1900	4	525	0.0042	1.0000	0.42%
Total							25.07%

Table 1: Carrier Information^{1 2 3}

¹ The existing CSC filing for Cingular should be removed and replaced with the updated AT&T technologies and values provided in Table 1. The power density information for carriers other than AT&T was taken directly from the CSC database dated 7/26/2012. Please note that %MPE values listed are rounded to two decimal points. The total %MPE listed is a summation of each unrounded contribution. Therefore, summing each rounded value may not reflect the total value listed in the table.

² In the case where antenna models are not uniform across all 3 sectors for the same frequency band, the antenna model with the highest gain was used for the calculations to present a worse-case scenario.

³ Antenna height listed for AT&T is in reference to the FDH Engineering, Inc. Structural Analysis dated October 23, 2012.

5. Conclusion

The above analysis verifies that emissions from the existing site will be below the maximum power density levels as outlined by the FCC in the OET Bulletin 65 Ed. 97-01. Even when using conservative methods, the cumulative power density from the proposed transmit antennas at the existing facility is well below the limits for the general public. The highest expected percent of Maximum Permissible Exposure at ground level is **25.07% of the FCC limit**.

As noted previously, obstructions (trees, buildings, etc.) that would normally attenuate the signal are not taken into account. As a result, the predicted signal levels are more conservative (higher) than the actual signal levels will be from the finished modifications.

6. Statement of Certification

I certify to the best of my knowledge that the statements in this report are true and accurate. The calculations follow guidelines set forth in ANSI/IEEE Std. C95.3, ANSI/IEEE Std. C95.1 and FCC OET Bulletin 65 Edition 97-01.



Daniel L. Goulet
C Squared Systems, LLC

October 25, 2012

Date

Attachment A: References

OET Bulletin 65 - Edition 97-01 - August 1997 Federal Communications Commission Office of Engineering & Technology

ANSI C95.1-1982, American National Standard Safety Levels With Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300 kHz to 100 GHz. IEEE-SA Standards Board

IEEE Std C95.3-1991 (Reaff 1997), IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave. IEEE-SA Standards Board

Attachment B: FCC Limits for Maximum Permissible Exposure (MPE)

(A) Limits for Occupational/Controlled Exposure⁴

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (E) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f ²)*	6
30-300	61.4	0.163	1.0	6
300-1500	-	-	f/300	6
1500-100,000	-	-	5	6

(B) Limits for General Population/Uncontrolled Exposure⁵

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (E) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	f/1500	30
1500-100,000	-	-	1.0	30

f = frequency in MHz * Plane-wave equivalent power density

Table 2: FCC Limits for Maximum Permissible Exposure (MPE)

⁴ Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure

⁵ General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure

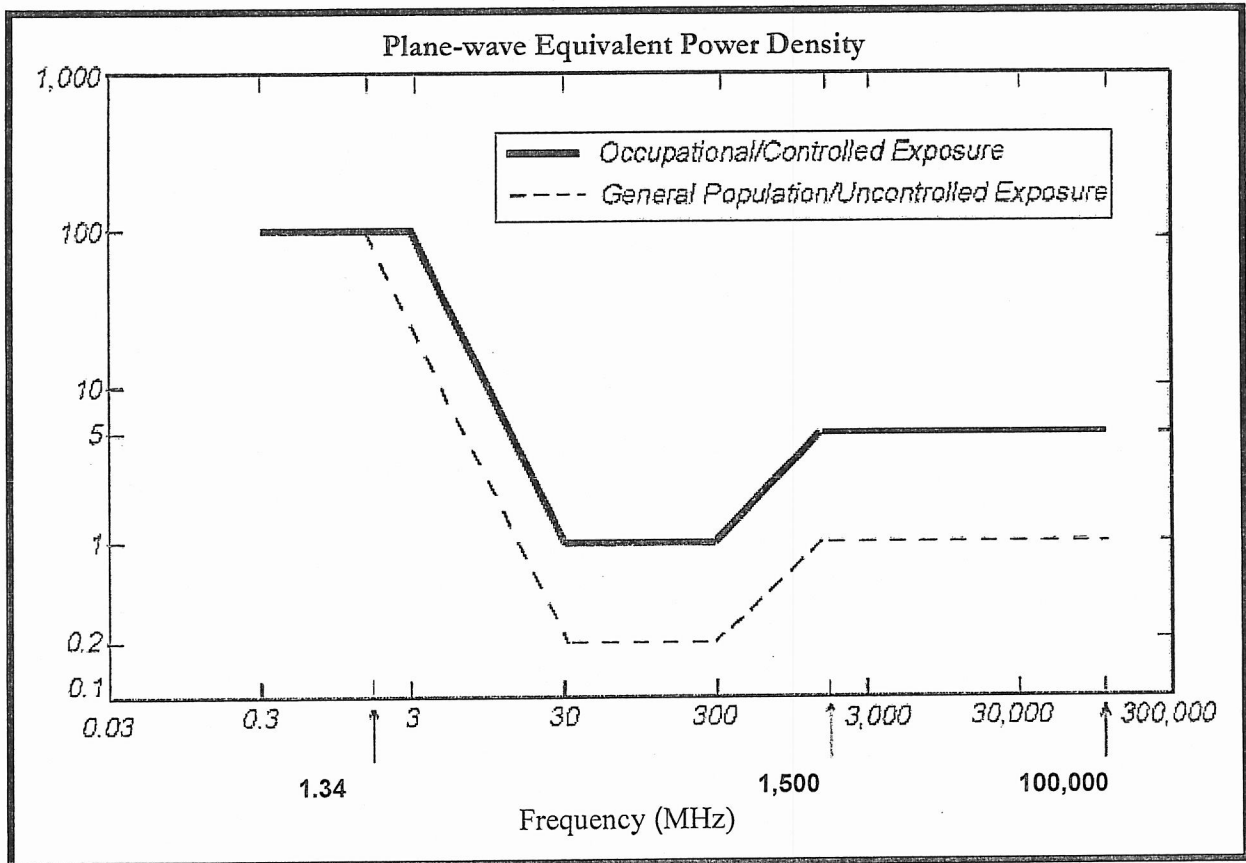
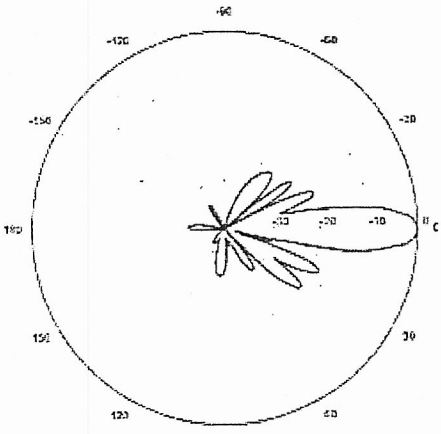
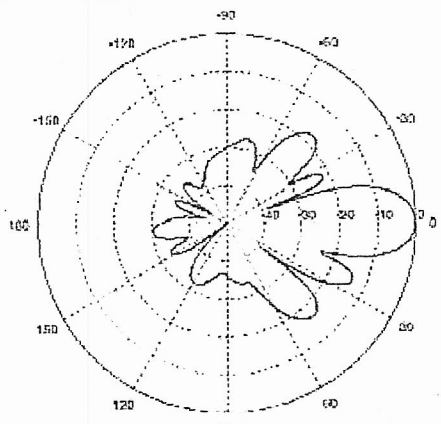
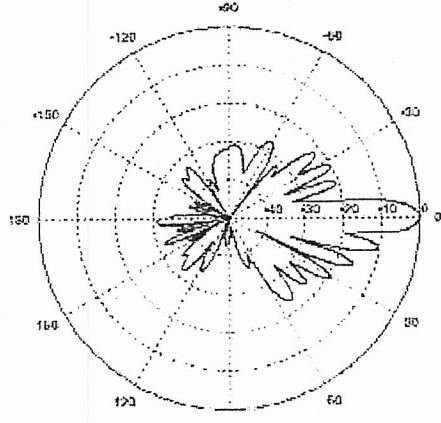


Figure 1: Graph of FCC Limits for Maximum Permissible Exposure (MPE)

Attachment C: AT&T Antenna Data Sheets and Electrical Patterns

<p>700 MHz</p> <p>Manufacturer: KMW Model #: AM-X-CD-17-65-00T-RET Frequency Band: 698-806 MHz Gain: 14.65 dBd Vertical Beamwidth: 10° Horizontal Beamwidth: 66° Polarization: Dual Slant ± 45° Size L x W x D: 96.0" x 11.8" x 6.0"</p>	
<p>850 MHz</p> <p>Manufacturer: Powerwave Model #: 7770.00 Frequency Band: 824-896 MHz Gain: 11.5 dBd Vertical Beamwidth: 15° Horizontal Beamwidth: 82° Polarization: Dual Linear ± 45° Size L x W x D: 55.0" x 11.0" x 5.0"</p>	
<p>1900 MHz</p> <p>Manufacturer: Powerwave Model #: 7770.00 Frequency Band: 1850-1990 MHz Gain: 13.4 dBd Vertical Beamwidth: 7° Horizontal Beamwidth: 86° Polarization: Dual Linear ± 45° Size L x W x D: 55.0" x 11.0" x 5.0"</p>	

PROJECT INFORMATION

SCOPE OF WORK:

- 1. TELECOMMUNICATIONS FACILITY UPGRADE (LTE);
- (1) NEW LITE ANTENNAS, (6) REPT'S (1) SURGE ARRESTOR,
- (1) FIBER LINE, (2) DC POWER LINES & (1) GPS ANTENNA.
- 2. INSTALL (1) LTE 680T CABINET

SITE ADDRESS:

154 SAYLE AVENUE
PUTNAM, CT 06260

LATITUDE:

41° 55' 46.0" N

LONGITUDE:

71° 53' 10.6" W

CURRENT USE:

TELECOMMUNICATIONS FACILITY

PROPOSED USE:


TELECOMMUNICATIONS FACILITY

DRAWING INDEX

	REV
T-1 TITLE SHEET	1
GN-1 GENERAL NOTES	1
A-1 COMPOUND PLAN & EQUIPMENT PLAN	1
A-2 ANTENNA PLAN & ELEVATION	1
A-3 DETAILS	1
G-1 PLUMBING DIAGRAM & GROUNDING DETAILS	1

SBA SITE ID: CT00680-S
SITE NAME: PUTNAM

VICINITY MAP

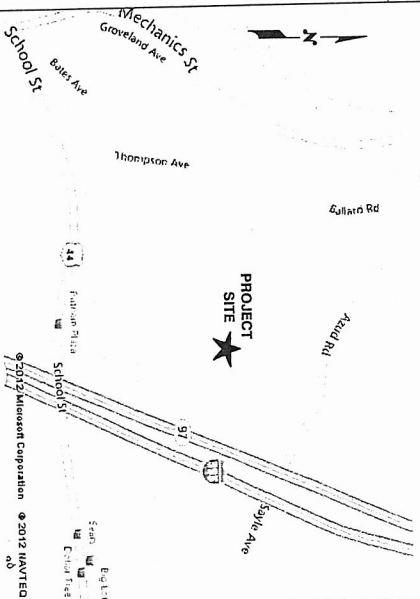

SITE NUMBER: CT1110
SITE NAME: PUTNAM-SBA



GENERAL NOTES

1. THIS DOCUMENT IS THE CREATION, DESIGN, PROPERTY AND COPYRIGHTED WORK OF AT&T. ANY REPRODUCTION OR USE BY GOVERNMENT AGENCIES FOR THE PURPOSES OF CONDUCTING THEIR LAWFULLY AUTHORIZED REGULATORY AND ADMINISTRATIVE FUNCTIONS IS SPECIFICALLY ALLOWED.
2. THE FACILITY IS AN UNMANNED PRIVATE AND SECURED EQUIPMENT INSTALLATION. IT IS ONLY ACCESSIBLE BY TRAINED TECHNICIANS OR SPANISH SEWER SERVICE. THE FACILITY IS NOT GOVERNED BY REGULATIONS REQUIRING PUBLIC ACCESS PER ADA REQUIREMENTS.
3. CONTRACTOR SHALL VERIFY ALL PLANS AND EXISTING DIMENSIONS AND CONDITIONS ON THE JOB SITE AND SHALL IMMEDIATELY NOTIFY THE AT&T REPRESENTATIVE IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK. ON BE RESPONSIBLE FOR SAME.

CALL



BEFORE YOU DIG



CALL TOLL FREE 1-800-922-4455 OR DIAL 811

UNDERGROUND SERVICE ALERT

SITE NUMBER: CT1110
SITE NAME: PUTNAM-SBA

154 SAYLE AVENUE
PUTNAM, CT 06260
WINDHAM COUNTY

at&t
500 ENTERPRISE DRIVE, SUITE 3A
ROCKY HILL, CT 06067

NO.	DATE	REVISIONS
1	10/24/12	ISSUED FOR CONSTRUCTION
0	06/20/12	ISSUED FOR REVIEW

SCALE: AS SHOWN
DESIGNED BY: DC
DRAWN BY: RB

DATE: 10/24/12
BY: [Signature]
CHECKED BY: [Signature]

AT&T
TITLE SHEET
(LITE)
DRAWING NUMBER
1-1



2 UNIT RE GLOBAL SERVICES company
800 MARSHALL PHELPS ROAD UNIT# 2A
WINDSOR, CT 06095

500 ENTERPRISE DRIVE, SUITE 3A
ROCKY HILL, CT 06067

SCALE: AS SHOWN
DESIGNED BY: DC
DRAWN BY: RB

DATE: 10/24/12
BY: [Signature]
CHECKED BY: [Signature]

AT&T
TITLE SHEET
(LITE)
DRAWING NUMBER
1-1

AT&T
TITLE SHEET
(LITE)
DRAWING NUMBER
1-1

GROUNDING NOTES

1. THE SUBCONTRACTOR SHALL REVIEW AND INSPECT THE EXISTING FACILITY GROUNDING SYSTEM AND LIGHTNING PROTECTION SYSTEM (AS DESIGNED AND INSTALLED) FOR STRICT COMPLIANCE WITH THE NEC (AS ADOPTED BY THE AIA), THE SITE-SPECIFIC (UL, LP, OR NFPA) LIGHTNING PROTECTION CODE, AND GENERAL COMPLIANCE WITH TELECOMMA AND TA GROUNDING STANDARDS. THE SUBCONTRACTOR SHALL REPORT ANY VIOLATIONS OR ADVERSE FINDINGS TO THE CONTRACTOR FOR RESOLUTION.
2. ALL GROUND ELECTRODE SYSTEMS (INCLUDING TELECOMMUNICATION, RADIO, LIGHTNING PROTECTION, AND AC POWER GESS) SHALL BE BONDED TOGETHER AT OR BELOW GRADE, BY TWO OR MORE COPPER BONDING CONDUCTORS IN ACCORDANCE WITH THE NEC.
3. THE SUBCONTRACTOR SHALL PERFORM IEEE FALL-OR-POTENTIAL RESISTANCE TO EARTH TESTING (PER IEEE 1100 AND 81) FOR NEW GROUND ELECTRODE SYSTEMS. THE SUBCONTRACTOR SHALL FORMER AND INSTALLED SUPPLEMENTAL BOND CONNECTIONS AS NEEDED TO ACHIEVE A TEST RESULT OF 5 OHMS OR LESS.
4. METAL RACKWAY SHALL NOT BE USED AS THE NEG. REQUIRED EQUIPMENT GROUND CONDUCTOR. STRAWED COPPER CONDUCTORS WITH GREEN INSULATION, SIZED IN ACCORDANCE WITH THE NEC, SHALL BE FURNISHED AND INSTALLED WITH THE POWER CIRCUITS TO BVS EQUIPMENT.
5. EACH BVS CABINET FRAME SHALL BE DIRECTLY CONNECTED TO THE MASTER GROUND BAR WITH GREEN INSULATED SUPPLEMENTAL EQUIPMENT GROUND WIRES, 6 AWG STRANDED COPPER OR LARGER FOR INDOOR BVS 2 AWG STRANDED COPPER FOR OUTDOOR BVS.
6. EXOTHERMIC WELDS SHALL BE USED FOR ALL GROUNDING CONNECTIONS BELOW GRADE.
7. APPROVED ANTI-OXIDANT COATINGS (I.E., CONDUCTIVE GEL OR PASTE) SHALL BE USED ON ALL COMPRESSION AND BOLTED GROUND CONNECTIONS.
8. ICE BRIDGE BONDING CONDUCTORS SHALL BE EXOTHERMICALLY BONDED OR BOLTED TO THE BRIDGE AND THE TOWER GROUND BAR.
9. ALUMINUM CONDUCTOR OR COPPER CLAD STEEL CONDUCTOR SHALL NOT BE USED FOR GROUNDING CONNECTIONS.
10. MISCELLANEOUS ELECTRICAL AND NON-ELECTRICAL METAL BOXES, FRAMES AND SUPPORTS SHALL BE BONDED TO THE GROUND RING, IN ACCORDANCE WITH THE NEC.
11. METAL CONDUIT SHALL BE MADE ELECTRICALLY CONTINUOUS WITH LISTED BONDING FITTINGS OR BY BONDING ACROSS THE DISCONTINUITY WITH 6 AWG COPPER WIRE UL APPROVED GROUNDING TYPE CONDUIT CLAMPS.
12. ALL NEW STRUCTURES WITH A FOUNDATION AND/OR FOOTING HAVING 20 FT. OR MORE OF 1/2 IN. OR GREATER ELECTRICALLY CONDUCTIVE REINFORCING STEEL MUST HAVE IT BONDED TO THE GROUND RING USING AN EXOTHERMIC WELD CONNECTION. ALL NEW 2" OR GREATER DIAMETER GROUND WIRE, PER NEC 250.30

GENERAL NOTES

1. FOR THE PURPOSE OF CONSTRUCTION DRAWING, THE FOLLOWING DEFINITIONS SHALL APPLY:
SUBCONTRACTOR - NEXLINK
OWNER - AT&T MOBILITY
GENERAL CONTRACTOR (CONSTRUCTION) - AT&T MOBILITY
2. PRIOR TO THE SUBMISSION OF BIDS, THE BIDDING SUBCONTRACTOR SHALL VERIFY THAT THE WORK CAN BE ACCOMPLISHED AS SHOWN ON THE CONSTRUCTION DRAWINGS. ANY DISCREPANCY FOUND SHALL BE BROUGHT TO THE ATTENTION OF CONTRACTOR.
3. ALL MATERIALS FURNISHED AND INSTALLED SHALL BE IN STRICT ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS, AND ORDINANCES. SUBCONTRACTOR SHALL ISSUE ALL APPROPRIATE NOTICES AND COMPLY WITH ALL LAWS, ORDINANCES, RULES, REGULATIONS, AND LOCAL ORDERS OF ANY JURISDICTION. THE SUBCONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND CARRIED OUT SHALL COMPLY WITH ALL APPLICABLE MUNICIPAL AND UTILITY COMPANY SPECIFICATIONS AND LOCAL JURISDICTIONAL CODES, ORDINANCES AND APPLICABLE REGULATIONS.
4. DRAWINGS PROVIDED HERE ARE NOT TO BE SCALED AND ARE INTENDED TO SHOW OUTLINE ONLY.
5. UNLESS NOTED OTHERWISE, THE WORK SHALL INCLUDE FURNISHING, INSTALLING, AND TESTING ALL MATERIALS NECESSARY TO COMPLETE ALL INSTALLATIONS AS INDICATED ON THE DRAWINGS.
6. "TIGHTING LIST" SUPPLIED WITH THE BID PACKAGE IDENTIFIES ITEMS THAT WILL BE SUPPLIED BY CONTRACTOR. ITEMS NOT INCLUDED IN THE BILL OF MATERIALS AND TIGHTING LIST SHALL BE SUPPLIED BY THE SUBCONTRACTOR.
7. THE SUBCONTRACTOR SHALL INSTALL ALL EQUIPMENT AND MATERIALS IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS UNLESS SPECIFICALLY STATED OTHERWISE.
8. IF THE SPECIFIED EQUIPMENT CANNOT BE INSTALLED AS SHOWN ON THESE DRAWINGS, THE SUBCONTRACTOR SHALL PROPOSE AN ALTERNATIVE INSTALLATION SPACE FOR APPROVAL BY THE CONTRACTOR.
9. SUBCONTRACTOR SHALL DETERMINE ACTUAL ROUTING OF CONDUIT, POWER AND T1 CABLES, GROUNDING CABLES AS SHOWN ON THE POWER, GROUNDING AND T1 CABLES DRAWING. SUBCONTRACTOR SHALL UTILIZE EXISTING TRAYS AND/OR SHALL ADD NEW TRAYS AS NECESSARY. SUBCONTRACTOR SHALL CONFIRM THE ACTUAL ROUTING WITH THE CONTRACTOR.
10. THE SUBCONTRACTOR SHALL PROTECT EXISTING IMPROVEMENTS, PAVEMENTS, CURBS, LANDSCAPING AND STRUCTURES. ANY DAMAGED PART SHALL BE REPAIRED AT SUBCONTRACTOR'S EXPENSE TO THE SATISFACTION OF OWNER.
11. SUBCONTRACTOR SHALL LEGALLY AND PROPERLY DISPOSE OF ALL SCRAP MATERIALS SUCH AS COAXIAL CABLES AND OTHER ITEMS REMOVED FROM THE EXISTING FACILITY. ANTENNAS REMOVED SHALL BE RETURNED TO THE OWNER'S DESIGNATED LOCATION.
12. SUBCONTRACTOR SHALL LEAVE PREMISES IN CLEAN CONDITION.
13. ALL CONCRETE REPAIR WORK SHALL BE DONE IN ACCORDANCE WITH AMERICAN CONCRETE INSTITUTE (ACI) 301.
14. ANY NEW CONCRETE NEEDED FOR THE CONSTRUCTION SHALL BE AIR-ENRICHED AND SHALL HAVE 4000 PSI STRENGTH AT 28 DAYS. ALL CONCRETE REPAIR WORK SHALL BE DONE IN ACCORDANCE WITH ACI 318 CODE REQUIREMENTS.
15. ALL STRUCTURAL STEEL WORK SHALL BE DETAILED, FABRICATED AND ERECTED IN ACCORDANCE WITH AISC SPECIFICATIONS. UNLESS OTHERWISE NOTED, ALL STRUCTURAL STEEL SHALL BE ASTM A572 TYPE E (FY = 36 ksi). ALL STEEL EXPOSED TO WEATHER SHALL BE HOT DIPPED GALVANIZED, TOUCHUP ALL SCRATCHES AND OTHER MARKS IN THE FIELD AFTER STEEL IS ERECTED USING A COMPATIBLE ZINC-RICH PAINT.
16. CONSTRUCTION SHALL COMPLY WITH UNITS SPECIFICATIONS AND "GENERAL CONSTRUCTION SERVICES FOR CONSTRUCTION OF AT&T MOBILITY SITES."
17. SUBCONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS PRIOR TO COMMENCING ANY WORK. ALL DIMENSIONS OF EXISTING CONSTRUCTION SHOWN ON THE DRAWINGS MUST BE VERIFIED. SUBCONTRACTOR SHALL NOTIFY THE CONTRACTOR OF ANY DISCREPANCIES PRIOR TO ORDERING MATERIAL OR PROCEEDING WITH CONSTRUCTION.
18. THE EXISTING CELL SITE IS IN FULL COMMERCIAL OPERATION. ANY CONSTRUCTION WORK BY SUBCONTRACTOR SHALL NOT DISRUPT THE EXISTING NORMAL OPERATION. ANY WORK ON EXISTING EQUIPMENT REQUIRES THE CONTRACTOR TO PROVIDE PROTECTIVE MEASURES AND SHALL BE SCHEDULED FOR AN APPROPRIATE MAINTENANCE WINDOW USUALLY IN LOW TRAFFIC PERIODS AFTER MIDNIGHT.
19. SINCE THE CELL SITE IS ACTIVE, ALL SAFETY PRECAUTIONS MUST BE TAKEN. PERSONNEL WORKING AROUND HIGH LEVELS OF ELECTROMAGNETIC RADIATION, EQUIPMENT SHOULD BE SHUTDOWN PRIOR TO PERSONAL REPAIR WORK THAT COULD EXPOSE THE WORKERS TO DANGER. PERSONAL REPAIR WORK SHOULD BE ADVISED TO BE WORK TO ALERT OF ANY DANGEROUS EXPOSURE LEVELS.
20. APPLICABLE BUILDING CODES:
SUBCONTRACTOR'S WORK SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES AS ADOPTED BY THE LOCAL AUTHORITY. THE BUILDING CODES AND STANDARDS IN EFFECT ON THE DATE OF CONTRACT AWARD SHALL GOVERN THE DESIGN.
BUILDING CODE: 2003 IBC WITH 2005 CT SUPPLEMENT & 2009 CT AMENDMENTS
FURNISHING CODE: REFER TO ELECTRICAL DRAWINGS
LIGHTING CODE: REFER TO ELECTRICAL DRAWINGS

ABBREVIATIONS

ACI	GENERAL CONTRACTOR	RF	RADIO FREQUENCY
AGL	ABOVE GRADE LEVEL		
AWG	AMERICAN WIRE GAUGE		
BCW	BASE COPPER WIRE		
BVS	BASE TRANSCIVER STATION		
EG	EXISTING GROUND		
EGR	EQUIPMENT GROUND RING		
G.C.	GENERAL CONTRACTOR	RF	RADIO FREQUENCY
MGB	MASTER GROUND BUS		
MIN	MINIMUM		
PROPOSED	NEW	TBD	TO BE DETERMINED
		TBR	TO BE REMOVED
		TBR8	TO BE REMOVED AND REPLACED
		TYP	TYPICAL


Hudson
Design Group
1400 SOUTH MAIN STREET
WINDSOR, CONNECTICUT 06095
TEL: (860) 233-3333
FAX: (860) 233-3334

NEXLINK
GLOBAL SERVICES COMPANY
800 MARSHALL PHELPS ROAD
WINDSOR, CT 06095
UNIT # 2A

at&t
500 ENTERPRISE DRIVE, SUITE 3A
ROCKY HILL, CT 06067


NO.	DATE	ISSUED FOR	REVISIONS	BY	CHECKED BY	DATE
1	1/24/12	ISSUED FOR CONSTRUCTION				
0	08/20/12	ISSUED FOR REVIEW				

AT&T
GENERAL NOTES
(L1E)
CH-1
1





NOTE:
REFER TO THE FINAL RF DATA SHEET FOR FINAL ANTENNA SETTINGS.

NOTE:
REFER TO STRUCTURAL ANALYSIS BY: FDH ENGINEERING, INC. DATED: OCTOBER 23, 2012, FOR THE CAPACITY OF THE REPORT FOR THE PROPOSED EQUIPMENT.

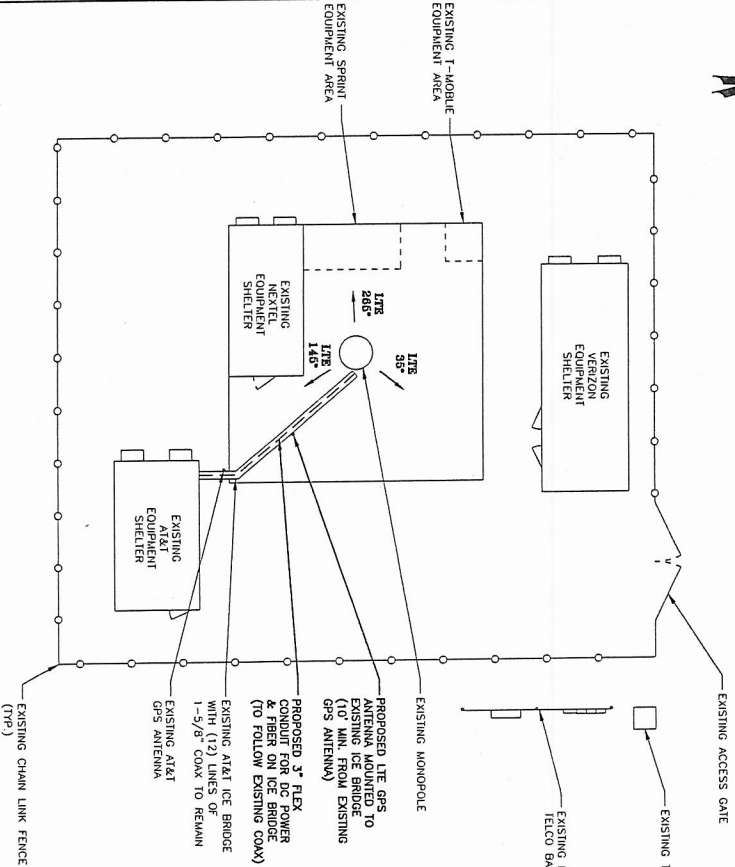

COMPOUND PLAN
SCALE: 1/8"=1'-0"

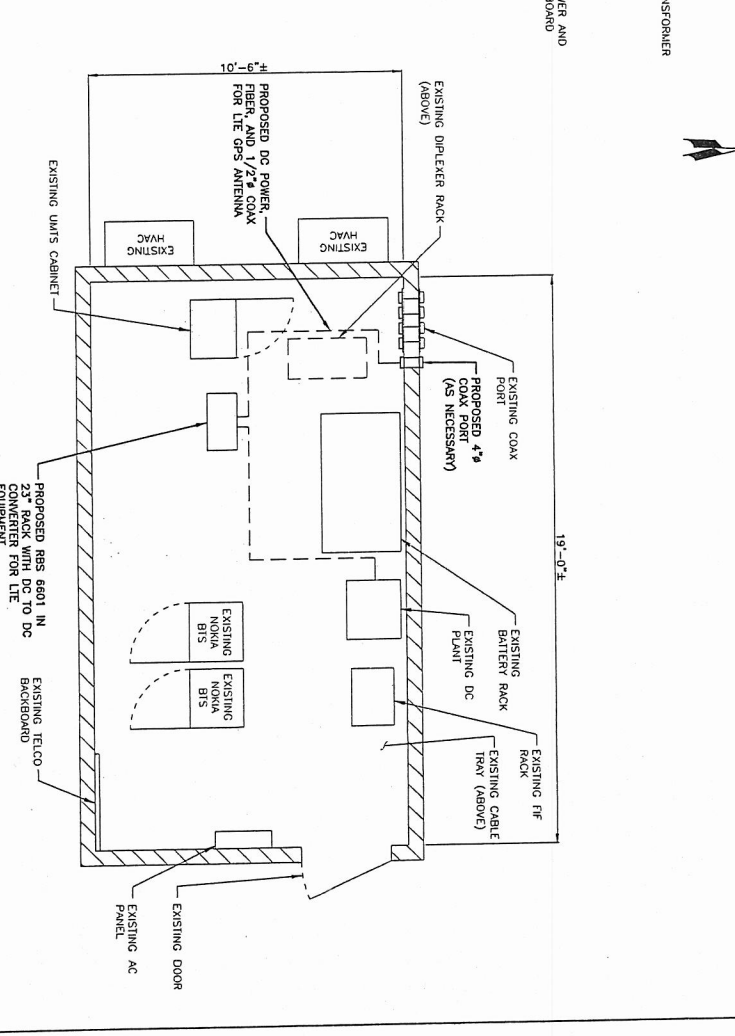

EQUIPMENT PLAN
SCALE: 1/2"=1'-0"



Hudson
Design Group
1000 CROFTON BLVD
SUITE 300
N. WINDSOR, MA 01843
TEL: (978) 332-3333
FAX: (978) 332-3334

MEVALINK
a Unit of GLOBAL SERVICES COMPANY
800 MARSHALL PHELPS ROAD
WINDSOR, CT 06095
UNIT#: 2A

SITE NUMBER: CT11110
SITE NAME: PUTNAM-SBA
154 SNAPE AVENUE
PUTNAM, CT 06280
WINDHAM COUNTY

at&t
500 ENTERPRISE DRIVE, SUITE 3A
ROCKY HILL, CT 06867

NO.	DATE	BY	CHKD BY	REVISIONS
1	10/24/13	ISSUED FOR CONSTRUCTION		
0	08/22/13	ISSUED FOR REVIEW		





SCALE	AS SHOWN	DESIGNED BY:	DC	DRAWN BY:	NS	DATE

NO.	DATE	BY	CHKD BY	REVISIONS
1	10/24/13	ISSUED FOR CONSTRUCTION		
0	08/22/13	ISSUED FOR REVIEW		

NO.	DATE	BY	CHKD BY	REVISIONS
1	10/24/13	ISSUED FOR CONSTRUCTION		
0	08/22/13	ISSUED FOR REVIEW		

AT&T
SHEET NUMBER: A-1
DATE: 10/24/13
DRAWN BY: NS
CHECKED BY: DC



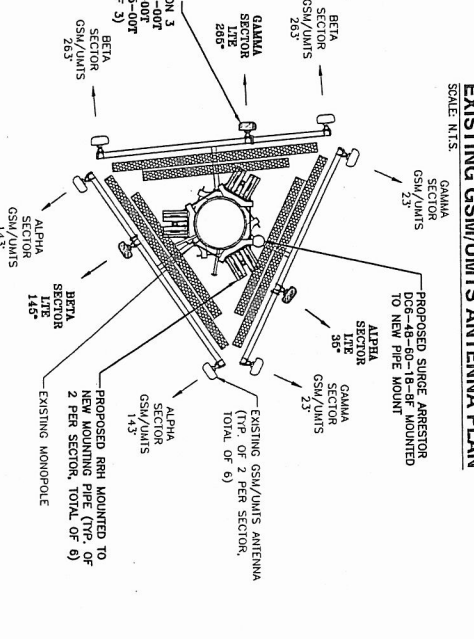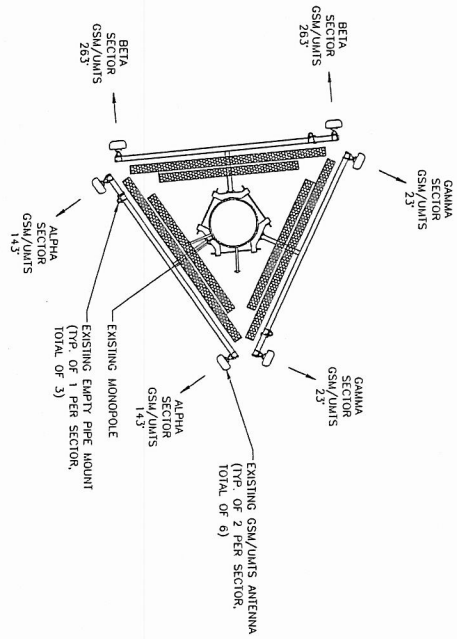


EXISTING GSM/UMTS ANTENNA PLAN
SCALE: N.T.S.

PROPOSED LTE ANTENNA PLAN
SCALE: N.T.S.

NOTE:
REFER TO STRUCTURAL ANALYSIS BY: FDU ENGINEERING, INC. FOR THE CAPACITY OF THE EXISTING STRUCTURES TO SUPPORT THE PROPOSED EQUIPMENT.

NOTE:
REFER TO THE FINAL RF DATA SHEET FOR FINAL ANTENNA SETTINGS.

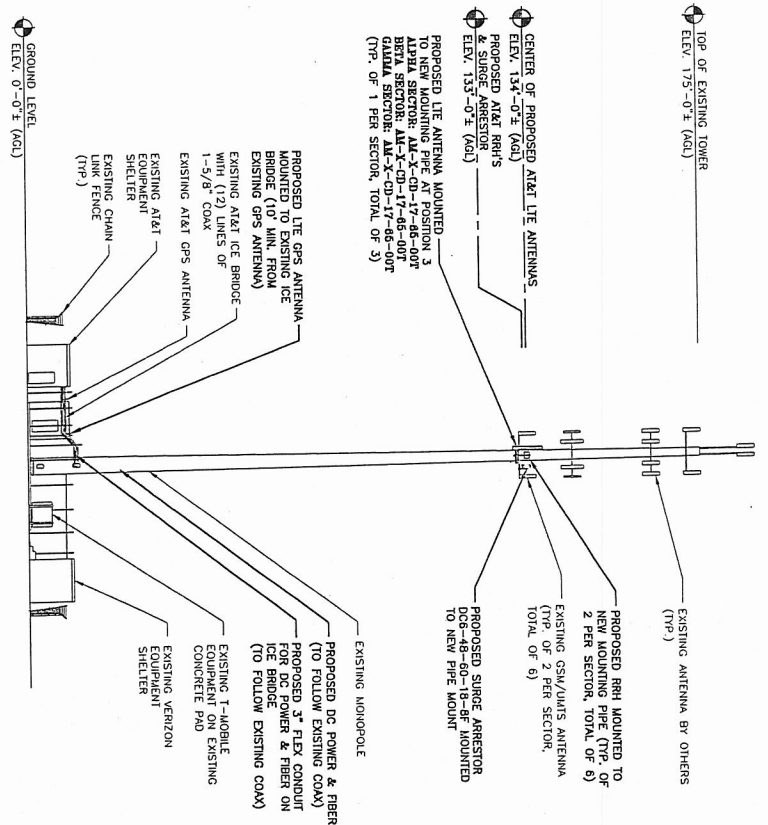

SOUTH ELEVATION
SCALE: 1/16"=1'-0"



Hudson
Design Group
1000 WASHINGTON STREET
N. ANDOVER, MASSACHUSETTS 01854
TEL: 978.683.4333
FAX: 978.683.5384

NEVLINK
Global Services Company
800 MARSHALL PHELPS ROAD UNIT # 2A
WINDSOR, CT 06095


SITE NUMBER: CT11110
SITE NAME: PUTNAM-SBA
154 STATE AVENUE
PUTNAM, CT 06280
WINDHAM COUNTY

at&t
500 ENTERPRISE DRIVE, SUITE 3A
ROCKY HILL, CT 06067



NO.	DATE	DESCRIPTION	ISSUED BY	REVIEWED BY	DATE
1	10/21/13	ISSUED FOR CONSTRUCTION	AS	AS	10/21/13
2	09/20/13	ISSUED FOR REVIEW	AS	AS	09/20/13

SCALE: AS SHOWN


AT&T
ANTENNA PLAN & ELEVATION
(115)
A-2
REV 1

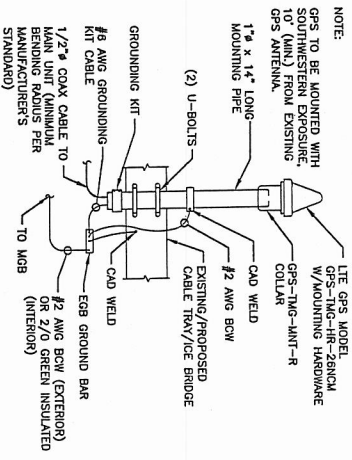

GPS MOUNTING DETAIL
SCALE: N1/S

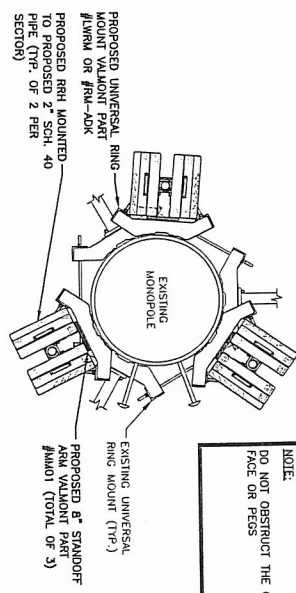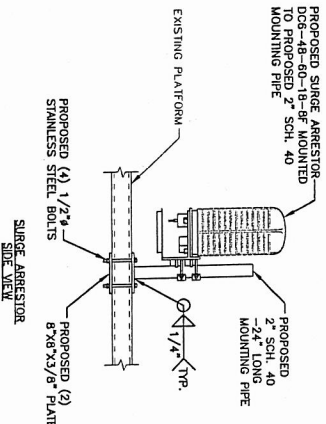

SECTION A-A

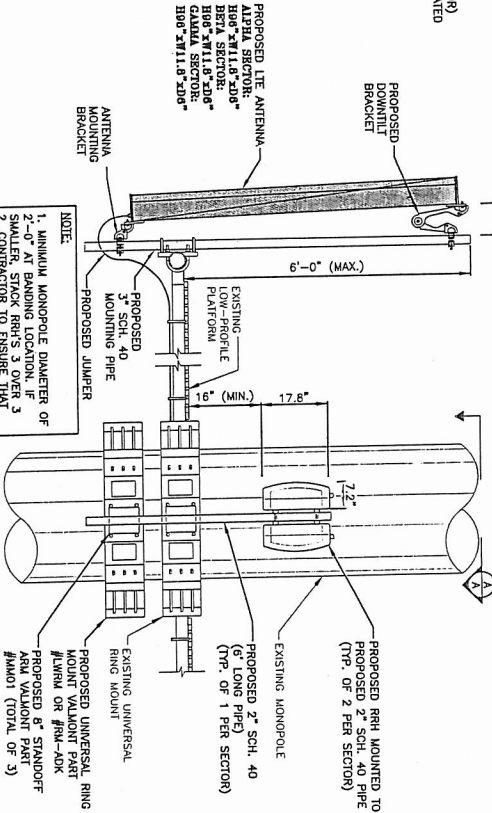

PROPOSED RRH & SURGE ARRESTOR MOUNTING DETAIL
SCALE: N1/S

PART #	MANUFACTURER	SIZE RANGE
UWR4	801088	12"-45"
RM-ADK	157286	36"-60"
		ADAPTER KIT



NOTE:
1. MINIMUM MONOPOLE DIAMETER OF 2'-0" AT BANDING LOCATION. IF SMALLER STACK RIGHTS IS OVER 3' RHM MOUNTING DOES NOT INTERFERE WITH CLIMBING LADDER
2. PROPOSED PIPE MUST TO BE COMBINED ADJACENT TO EXISTING TIES

NOTE:
1. REFER TO RBDS & SECTOR SHEETS FOR ANTENNA MODEL, TYPE & QUANTITY REQUIRED PER SECTOR

NOTE:
DO NOT OBSTRUCT THE CLIMBING FACE OR PEGS

NOTE:
REFER TO STRUCTURAL ANALYSIS BY: FDH ENGINEERING, INC. DATED: OCTOBER 23, 2012 FOR EXISTING STRUCTURES TO SUPPORT THE PROPOSED EQUIPMENT.

NOTE:
REFER TO THE FINAL RF DATA SHEET FOR FINAL ANTENNA SETTINGS.

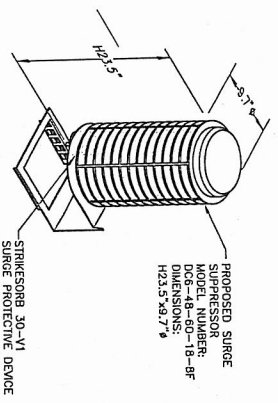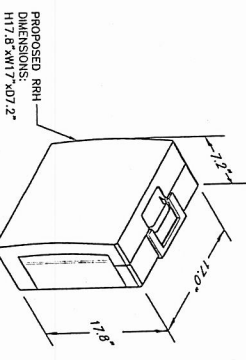

DC SURGE SUPPRESSOR DETAIL
SCALE: N1/S

Hudson Design Group
1800 GOSWOLD BLVD
N. WINDSOR, CT 06095
TEL: 860.333.5333
FAX: 860.333.5334

NEALINK
Global Services
A Unit of GLOBAL SERVICES company
800 MARSHALL PHELPS ROAD UNIT# 2A
WINDSOR, CT 06095

SITE NUMBER: CT11110
SITE NAME: PUTNAM-SBA
154 STATE AVENUE
PUTNAM, CT 06260
WINDHAM COUNTY



at&t
500 ENTERPRISE DRIVE, SUITE 3A
MOON HILL, CT 06050

DATE	DESCRIPTION	BY	CHKD BY
10/23/12	ISSUED FOR CONSTRUCTION	ADP	ADP
09/26/12	ISSUED FOR REVIEW	ADP	ADP

SCALE: AS SHOWN

DESIGNED BY: DC
ISSUED BY: RS
CHKD BY: ADP


AT&T
DETAILS
(11E)
DRAWING NUMBER: A-3
REV: 1

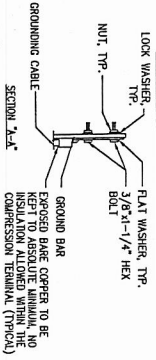

- NOTE:
1. DOUBLING UP OR STACKING * OF CONNECTION IS NOT PERMITTED.
 2. OVOID NIBBLING COMPOUND TO BE USED AT ALL LOCATIONS.
 3. COVERED DOWNLEADS FROM UPPER EGR, LOWER EGR, AND MGR.


TYPICAL GROUND BAR CONNECTION DETAIL

1 - N.T.S.

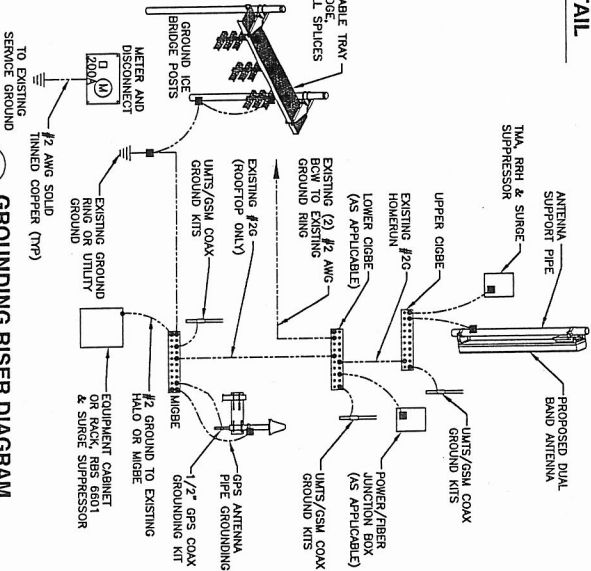

GROUNDING RISER DIAGRAM


3 - N.T.S.

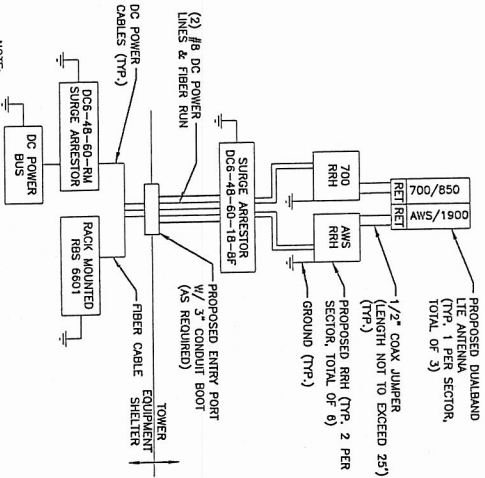

LTE PLUMBING DIAGRAM

2 - N.T.S.

NO.	REQ.	PART NO.	DESCRIPTION
1	1	HIGB-0460-IS	SOLID GND. BAR (20\"/>



GROUND BAR DETAIL

4 - N.T.S.



SITE NUMBER: CT11110
SITE NAME: PUTNAM-SBA
154 SAITE AVENUE
PUTNAM, CT 06280
WINDHAM COUNTY



NO.	DATE	REVISIONS
1	10/24/16	ISSUED FOR CONSTRUCTION
0	10/20/17	ISSUED FOR REVIEW



AT&T
AT&T PLUMBING DIAGRAM & GROUNDING DETAILS
(1/15)
SCALE: AS SHOWN
DATE: 1/30/01
REV: 1