

May 30, 2014

David Martin and Members of the Siting Council Connecticut Siting Council Ten Franklin Square New Britain, CT 06051

> RE: Notice of Exempt Modification 459 Burr Road Southbury, CT 06488 Sprint Site #: NV2.5_CT54XC717-A N 41° 26' 55.20" W -73° 10' 57.52"

Dear Mr. Martin and Members of the Siting Council:

On behalf of Sprint Spectrum, SBA Communications is submitting an exempt modification application to the Connecticut Siting council for modification of existing equipment at a tower facility located at 459 Burr Road, Southbury, CT.

The 459 Burr Road facility consists of a 149' MONOPOLE Tower owned and operated by SBA Towers IV, LLC. In order to accommodate technological changes and enhance system performance in the State of Connecticut, Sprint Spectrum plans to modify the equipment configurations at many of its existing cell sites. Please accept this letter and attachments as notification, pursuant to R.C.S.A. Section 16-50j-73, of construction which constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2). In compliance with R.C.S.A. Section 16-50j-73, a copy of this letter and attachments is being sent to the chief elected official of the municipality in which the affected cell site is located.

As part of Sprint's Network Vision modification project, Sprint desires to upgrade their equipment to meet the new standards of 4G technology. The new equipment will allow customers to download files and browse the internet at a high rate of speed while also allowing their phones to be compatible with the latest 4G technology.

Attached is a summary of the planned modifications, including power density calculations reflecting the change in Sprint's operations at the site along with the required fee of \$625.

The changes to the facility do not constitute modifications as defined in Connecticut General Statutes ("C.G.S.") Section 16-50i(d) because the general physical characteristics of the facility will not be



significantly changed or altered. Rather, the planned changes to the facility fall squarely within those activities explicitly provided for in R.C.S.A. Section 16-50j-72(b)(2).

1. The overall height of the structure will be unaffected.

2. The proposed changes will not extend the site boundaries. There will be no effect on the site compound other than the new equipment cabinets.

3. The proposed changes will not increase the noise level at the existing facility by six decibels or more.

4. The changes in radio frequency power density will not increase the calculated "worst case" power density for the combined operations at the site to a level at or above the applicable standard for uncontrolled environments as calculated for a mixed frequency site.

For the foregoing reasons, SBA Communications on behalf of Sprint Spectrum, respectfully submits that he proposed changes at the referenced site constitute exempt modifications under R.C.S.A. Section 16-50j-72(b)(2).

Please feel free to call me at (508) 251-0720 x 3804 with any questions you may have concerning this matter.

Thank you,

Kri Pelletier SBA Communications Corporation 33 Boston Post Road West Suite 320 Marlborough, MA 01752 508-251-0720 x 3804 + T 508-251-1755 + F 203-446-7700 + C kpelletier@sbasite.com



Sprint Spectrum Equipment Modification

459 Burr Road , Southbury, CT Site number CT54XC717-A

Tower Owner: SBA Towers IV, LLC

Equipment Configuration: MONOPOLE Tower

Current and/or approved:

- (3) RFS APXVSPP18-C-A20
- · (3) ALU 1900 MHz RRUs
- · (3) ALU 800 MHz RRUs
- · (3) ALU 800 MHz Filters
- (4) RFS ACU-A20-N RETs
- (3) 1-1/4" Feedlines

Planned Modifications:

- (3) RFS APXVSPP18-C-A20
- (3) RFS APXVTM14-C-I20
- (3) ALU TD-RRH8x20-25 RRUs
- (3) ALU 1900 MHz RRUs
- (3) ALU 800 MHz RRUs
- · (3) ALU 800 MHz Filters
- (4) RFS ACU-A20-N RET
- (4) 1-1/4" Feedlines

Structural Information:

The attached structural analysis demonstrates that the tower and foundation will have adequate structural capacity to accommodate the proposed modifications.

Power Density:

The anticipated Maximum Composite contributions from the Sprint facility are 1.40% of the allowable FCC established general public limit. The anticipated composite MPE value for this site assuming all carriers present is 21.90% of the allowable FCC established general public limit sampled at the ground level.

Carrier	MPE %
Sprint	1.40%
AT&T	14.94%
T-Mobile	5.56%



May 30, 2014

Mr. Ed Edelson First Selectman Town of Southbury 501 Mian Street South Southbury, CT 06488

RE: Telecommunications Facility @ 459 Burr Rd, Southbury, CT

Dear Mr. Elelson,

In order to accommodate technological changes and enhance system performance in the State of Connecticut, Sprint Spectrum will be changing its equipment configuration at certain cell sites.

As required by Regulations of Connecticut State Agencies (R.C.S.A.) Section 16-50j-73, the Connecticut Siting Council has been notified of the changes and will review Sprint's proposal. Please accept this letter as notification under Section 16-50j-73 of construction which constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2).

The accompanying letter to the Siting Council fully describes Sprint's proposal for the referenced cell site. However, if you have any questions or require any further information on our plans or the Siting Council's procedures, please call me at (508) 251-0720 x 3804.

Thank you,

Kri Pelletier SBA Communications Company 33 Boston Post Road West, Suite 320 Marlborough, MA 01752 508-251-0720 x 3804 + T 508-251-1755 + F 203-446-7700 + C kpelletier@sbasite.com



May 30, 2014

Ms. Susan Cusato 639 Washington Rd., Woodbury, CT 06798

Ms. Holly E. Hageman 459 Burr Rd. Southbury, CT 06488

RE: Telecommunications Facility @ 459 Burr Rd., Southbury, CT 06488

Dear Ms. Cusato and Ms. Hageman,

In order to accommodate technological changes and enhance system performance in the State of Connecticut, Sprint Spectrum will be changing its equipment configuration at certain cell sites.

As required by Regulations of Connecticut State Agencies (R.C.S.A.) Section 16-50j-73, the Connecticut Siting Council has been notified of the changes and will review Sprint's proposal. Please accept this letter as notification under Section 16-50j-73 of construction which constitutes an exempt modification pursuant to R.C.S.A. Section 16-50j-72(b)(2).

The accompanying letter to the Siting Council fully describes Sprint's proposal for the referenced cell site. However, if you have any questions or require any further information on our plans or the Siting Council's procedures, please call me at (508) 251-0720 x 3804.

Thank you,

Kri Pelletier SBA Communications Company 33 Boston Post Road West, Suite 320 Marlborough, MA 01752 508-251-0720 x 3804 + T 508-251-1755 + F 203-446-7700 + C kpelletier@sbasite.com



RADIO FREQUENCY FCC REGULATORY COMPLIANCE MAXIMUM PERMISSIBLE EXPOSURE (MPE) ASSESSMENT

Sprint Existing Facility

Site ID: CT54XC717

Southbury

459 Burr Road Southbury, CT 06488

May 29, 2014

EBI Project Number: 62143104



May 29, 2014

Sprint Attn: RF Engineering Manager 1 International Boulevard, Suite 800 Mahwah, NJ 07495

Re: Radio Frequency Maximum Permissible Exposure (MPE) Assessment for Site: CT54XC717 - Southbury

Site Total: 21.90% - MPE% in full compliance

EBI Consulting was directed to analyze the proposed upgrades to the existing Sprint facility located at 459 Burr Road, Southbury, CT, for the purpose of determining whether the radio frequency (RF) exposure levels from the proposed Sprint equipment upgrades on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01 and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter (μ W/cm2). The number of μ W/cm2 calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits, therefore it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) - (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

<u>General population/uncontrolled exposure</u> limits apply to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general public would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Public exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter (μ W/cm²). The general population exposure limit for the cellular band (850 MHz Band) is approximately 567 μ W/cm², and the general population exposure limit for the 1900 MHz and 2500 MHz bands is 1000 μ W/cm². Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.



<u>Occupational/controlled exposure</u> limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over their exposure and can exercise control over the potential for exposure and can exercise through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

CALCULATIONS

Calculations were done for the proposed upgrades to the existing Sprint Wireless antenna facility located at 459 Burr Road, Southbury, CT, using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. All calculations were performed assuming a lobe representing the maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was focused at the base of the tower. For this report the sample point is the top of a 6 foot person standing at the base of the tower.

For all calculations, all emissions were calculated using the following assumptions:

- 1) 2 channels in the 1900 MHz Band were considered for each sector of the proposed installation.
- 2) 1 channel in the 800 MHz Band was considered for each sector of the proposed installation
- 3) 2 channels in the 2500 MHz Band were considered for each sector of the proposed installation.
- 4) All radios at the proposed installation were considered to be running at full power and were uncombined in their RF transmissions paths per carrier prescribed configuration. Per FCC OET Bulletin No. 65 - Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. This is rarely the case, and if so, is never continuous.
- 5) For the following calculations the sample point was the top of a six foot person standing at the base of the tower. The maximum gain of the antenna per the antenna manufactures supplied specifications minus 10 dB was used in this direction. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.



- 6) The antennas used in this modeling are the RFS APXVSPP18-C-A20 and the RFS APXVTM14-C-I20. This is based on feedback from the carrier with regards to anticipated antenna selection. The RFS APXVSPP18-C-A20 has a 15.9 dBd gain value at its main lobe at 1900 MHz and 13.4 dBd at its main lobe for 850 MHz. The RFS APXVTM14-C-I20 has a 15.9 dBd gain value at its main lobe at 2500 MHz. The maximum gain of the antenna per the antenna manufactures supplied specifications, minus 10 dB, was used for all calculations. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 7) The antenna mounting height centerline for the proposed antennas is **138 feet** above ground level (AGL).
- 8) Emissions values for additional carriers were taken from the Connecticut Siting Council active database. Values in this database are provided by the individual carriers themselves.

All calculation were done with respect to uncontrolled / general public threshold limits

Number Antenna Make Antenna Model Radio Type Frequency Band Technology (Wats) Channels Power reduction Height (ft) height (ft																	
Site Addresss 439 Bur Road, Southbury, CT, 06488 Monopole Sector 1 Sector 1 Antenna Make Antenna Model Radio Type Frequency Band Power CDLIP Pr CDLIP Pr CD		Site ID	CT5	4XC717 - South	hury	1											
Sector 1 Antenna Antenna Model Radio Type Frequency Band Technology (Watts) Channels Antenna Antenna Antenna Model Additional ERP Power (Channel) Power Composite (1) 0 db Antenna analysis Cable Loss Additional ERP Power (Channel) Power Composite (1) 0 db Antenna analysis Cable Size (2) 0 db Loss (db) ERP Power Power 1a RFS APX/SPP18-CA20 RH 350 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2" 0.5 3 195.4 0.07% 1a RFS APX/SPP18-CA20 RH 2500 MHz CDMA / LTE 20 1 20 5.9 138 132 1/2" 0.5 3 195.4 0.07% Sector 2 Sector 2 Sector 2 Sector 2 Sector 2 Sector 2 Sector 2																	
Sector 1 Sector 1 Antenna Antenna Make Antenna Gain (10 db) <td></td> <td>-</td> <td></td> <td></td> <td>,,</td> <td></td>		-			,,												
Antenna Antenna Make						3											
Antenna Antenna Make Antenna Madel Radio Type Frequency Band Technology Out Per (Watts) Campe Antenna Analysis Cable Loss Additional Power 1a RFS APXXSPP18-CA20 RRH 1900 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.14% 1B RFS APXXSPP18-CA20 RRH 1900 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.25% IB RFS APXVTMM14-C120 RRH 2500 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.25% V Frequency Band rechnology Virter 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.25% Vumber Antenna Antenna Antenna An								Sector 1									
Antenna Antenna Make Antenna Madel Radio Type Frequency Band Technology Out Per (Watts) Campe Antenna Analysis Cable Loss Additional Power 1a RFS APXXSPP18-CA20 RRH 1900 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.14% 1B RFS APXXSPP18-CA20 RRH 1900 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.25% IB RFS APXVTMM14-C120 RRH 2500 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.25% V Frequency Band rechnology Virter 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.25% Vumber Antenna Antenna Antenna An						1											
Antenna Antenna Antenna Antenna Antenna Antenna Antenna Andel construction Antenna Andel construction Andel construction <td></td>																	
Antenna Number Antenna																	
Number Antenna Make Antenna Model Radio Type Frequency Band Technology (Watts) Channels Power reduction Height (ft) height (f																	
1a RFS APXVSPP18-C-A20 RRH 1900 MHz CDMA/LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.14% 1a RFS APXVSPP18-C-A20 RRH 850 MHz CDMA/LTE 20 1 20 3.4 138 132 1/2" 0.5 3 19.54 0.07% 1a RFS APXVSP18-C-A20 RRH 850 MHz CDMA/LTE 20 1 20 3.4 138 132 1/2" 0.5 3 19.54 0.07% Image: Sector 100 MHz CDMA/LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.07% Sector 2 Number of Composite Channels Antenna Gain Antenna Gain Antenna Gain Antenna Gain Antenna Gain Antenna Gain Antenna Gable Size (db) Loss (db) EPP Percentage 2a RF5 APXVSP									Composite								Density
1a RFS APXVSPP18-C-A20 RRH 850 MHz CDMA/LTE 20 1 20 3.4 138 132 1/2" 0.5 3 19.54 0.07% 18 RFS APXVTMM14-C-120 RRH 2500 MHz CDMA/LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.25% Sector 2 Sector 2 Composite for				<i>.</i>			. ,	1		,		-					Percentage
1B RFS APXVTMM14-C-120 RRH 2500 MHz CDMA/LTE 20 2 40 5.9 138 132 1/2 " 0.5 3 69.51 0.25% Sector total Power Density Value: 0.47% Sector 2									-								
Antenna Antenna Model Radio Type Frequency Band Technology Owner Out Per Channel Antenna Gain (10 db) Antenna Gain (20 mosile) Antenna Gain (10 db) Antenna Gain (10 db) Antenna Gain (10 db) Antenna (10 db) Antenna (10 db) Additional ERP Power Density 2a RFS APXVSPP18-C-A20 RRH 1900 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.14% 2a RFS APXVSP18-C-A20 RRH 1900 MHz CDMA / LTE 20 1 20 3.4 138 132 1/2" 0.5 3 69.51 0.14% 28 RFS APXVSP18-C-A20 RRH 2500 MHz CDMA / LTE 20 1 20 3.4 138 132 1/2" 0.5 3 69.51 0.25% 28 RFS APXVTMM14-C-120 RRH 2500 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.25% Gamel <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td><td>-</td><td></td><td>-</td><td>,</td><td></td><td>_</td><td></td><td></td></td<>									-	-		-	,		_		
Sector 2 Antenna Antenna Model Radio Type Frequency Band Technology Ower (Watts) Antenna Gain Power Antenna Gain (10 db Antenna analysis Cable Size Cable Loss Additional Loss (dB) ERP Power Density 2a RFS APXVSPP18-C-A20 RH 1900 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.07% 2a RFS APXVSPP18-C-A20 RH 1900 MHz CDMA / LTE 20 1 20 3.4 138 132 1/2" 0.5 3 19.54 0.07% 28 RFS APXVSPNIA-C-200 RH 2500 MHz CDMA / LTE 20 1 20 3.4 138 132 1/2" 0.5 3 19.54 0.07% 28 RFS APXVSPNIA-C-200 RH 2500 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.25% Sector 3 Sector 3 <td< td=""><td>1B</td><td>RFS</td><td>APXVTMM14-C-120</td><td>RRH</td><td>2500 MHz</td><td>CDMA / LTE</td><td>20</td><td>2</td><td>40</td><td>5.9</td><td>138</td><td>132</td><td>,</td><td></td><td>-</td><td></td><td>0.25%</td></td<>	1B	RFS	APXVTMM14-C-120	RRH	2500 MHz	CDMA / LTE	20	2	40	5.9	138	132	,		-		0.25%
Antenna Antenna NumberAntenna Make Antenna ModelAntenna ModelRadio TypeFrequency BandTechnologyPower (Watts)Antenna ChannelAntenna Gain PowerAntenna Gain (10 dbAntenna Height (ft) Height (ft)Cable SizeCable Loss (dB)Additional Loss (dB)ERPPower Percentag Percentag2aRFSAPXVSPP18-C-A20RRH1900 MHzCDMA / LTE202405.91381321/2 "0.5369.510.14%2aRFSAPXVSPP18-C-A20RRH850 MHzCDMA / LTE201203.41381321/2 "0.5369.510.14%2bRFSAPXVSP18-C-A20RRH2500 MHzCDMA / LTE202405.91381321/2 "0.5369.510.25%2bCCAdditionalCCC2405.91381321/2 "0.5369.510.25%2bCFrequency BandCCO1202405.91381321/2 "0.5369.510.25%2bCFrequency BandCCO1202405.91381321/2 "0.5369.510.25%2bCFrequency BandCCO2405.91381321/2 "0.5369.510.25% <td></td> <td>Sector to</td> <td>otal Power D</td> <td>ensity Value:</td> <td>0.47%</td> <td></td>													Sector to	otal Power D	ensity Value:	0.47%	
Antenna NumberAntenna MadeAntenna ModelRadio TypeFrequency BandTechnologyOut Per ChannelNumber of ChannelAntenna Gain (10 dbAntenna Antenna MeightAntenna Antenna heightCable LossAdditional Loss (dB)Power Percentag2aRFSAPXVSPP18-C-A20RHH1900 MHzCDMA / LTE202405.91381321/2"0.5369.510.14%2aRFSAPXVSPP18-C-A20RHH1900 MHzCDMA / LTE202405.91381321/2"0.5369.510.07%2BRFSAPXVTMM14-C-120RHH2500 MHzCDMA / LTE202405.91381321/2"0.5369.510.25%CompositeFrequency BandCDMA / LTE202405.91381321/2"0.5369.510.25%CompositeFrequency BandCDMA / LTE202405.91381321/2"0.5369.510.25%CompositeFrequency BandCDMA / LTE202405.91381321/2"0.5369.510.25%CompositeFrequency BandCDMA / LTE202405.91381321/2"0.5369.510.25%CompositeFrequency BandFrequency BandCompositeFrequency BandNamer of ChannelNam								Sector 2									
Antenna NumberAntenna MadeAntenna ModelRadio TypeFrequency BandTechnologyOut Per ChannelNumber of ChannelAntenna Gain (10 dbAntenna Height (1)Antenna heightCable LossAdditional Loss (dB)Power Percentag2aRFSAPXVSPP18-C-A20RRH1900 MHzCDMA / LTE202405.91381321/2"0.5369.510.14%2aRFSAPXVSP18-C-A20RRH1900 MHzCDMA / LTE202405.91381321/2"0.5369.510.07%2BRFSAPXVTM14-C-120RRH2500 MHzCDMA / LTE202405.91381321/2"0.5369.510.25%CompositeFrequency BandCDMA / LTE202405.91381321/2"0.5369.510.25%CompositeFrequency BandCDMA / LTE202405.91381321/2"0.5369.510.25%CompositeFrequency BandCDMA / LTE2024005.91381321/2"0.5369.510.25%CompositeFrequency BandCompositeCompositeFrequency BandCompositeFrequency BandFrequency																	
Antenna NumberAntenna MadeAntenna ModelRadio TypeFrequency BandTechnologyOut Per ChannelNumber of ChannelAntenna Gain (10 dbAntenna AntennaAntenna analysisCable LossAdditional Loss (dB)Power Percentag2aRFSAPXVSPP18-C-A20RRH1900 MHzCDMA / LTE202405.91381321/2"0.5369.510.14%2aRFSAPXVSP18-C-A20RRH1900 MHzCDMA / LTE202405.91381321/2"0.5369.510.07%2bRFSAPXVTM14-C-120RRH2500 MHzCDMA / LTE202405.91381321/2"0.5369.510.25%cCAPXCDMA / LTE202405.91381321/2"0.5369.510.25%cFrequency BandCDMA / LTE202405.91381321/2"0.5369.510.25%Colspan="4">Sector 3Sector 3Antenna MakeAntenna MakeAntenna																	
Antenna NumberAntenna MadeAntenna ModelRadio TypeFrequency BandChannelsChannelsNumber of PowerComposite reduction(10 db reduction)Antenna heightCable LossAdditional Loss (dB)ERPDensity Percentage2aRFSAPXVSP18-C-A20RRH1900 MHzCDMA / LTE202405.91381321/2"0.5369.510.14%2aRFSAPXVSP18-C-A20RRH850 MHzCDMA / LTE2012003.41381321/2"0.5369.510.07%2BRFSAPXVTMM14-C-120RH2500 MHzCDMA / LTE202405.91381321/2"0.5369.510.07%2BRFSAPXVTMM14-C-120RH2500 MHzCDMA / LTE202405.91381321/2"0.5369.510.07%2CCA405.91381321/2"0.5369.510.07%2DCRFPowerC405.91381321/2"0.5369.510.07%2DCRFAptennaAp																	_
NumberAntenna MadelRadio TypeFrequency BandTechnology(Watts)ChanelsPowerreductionHeight (ft)heightCable Size(dB)Loss (dB)ERPPercentage2aRFSAPXVSPP18-C-A20RRH1900 MHzCDMA/LTE202405.91381321/2 "0.5369.510.14%2aRFSAPXVSP18-C-A20RRH850 MHzCDMA/LTE201203.41381321/2 "0.5319.540.07%2bRFSAPXVTMM14-C120RRH2500 MHzCDMA/LTE201203.41381321/2 "0.5319.540.07%2bRFSAPXVTMM14-C120RRH2500 MHzCDMA/LTE202405.91381321/2 "0.5319.540.07%Colspan="4">Colspan="4">Ferquency BandCDMA/LTE201203.41381321/2 "0.530.550.25%Ferquency BandCDMA/LTE202405.91381321/2 "0.530.550.25%Ferquency BandCDMA/LTE202405.91381321/2 "0.530.550.25%Ferquency BandFerquency BandFerquency BandFerquency BandFerquency BandFerquency BandAntenna Sange Sange Sange Sange Sange Sange Sange Sange Sange																	
2a RFS APXVSPP18-C-A20 RRH 1900 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2 " 0.5 3 69.51 0.14% 2a RFS APXVSPP18-C-A20 RRH 850 MHz CDMA / LTE 20 1 20 3.4 138 132 1/2 " 0.5 3 69.51 0.14% 2B RFS APXVSPP18-C-A20 RRH 2500 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2 " 0.5 3 69.51 0.07% 2B RFS APXVTMM14-C-120 RRH 2500 MHz CDMA / LTE 20 2 40 5.9 138 132 1/2 " 0.5 3 69.51 0.25% Sector 3				р. I: т					•				6 H C			500	
2a RFS APXVSPP18-C-A20 RRH 850 MHz CDMA/LTE 20 1 20 3.4 138 132 1/2 " 0.5 3 19.54 0.07% 2B RFS APXVSP18-C-A20 RRH 2500 MHz CDMA/LTE 20 2 40 5.9 138 132 1/2 " 0.5 3 19.54 0.07% 2B RFS APXVTMM14-C-120 RRH 2500 MHz CDMA/LTE 20 2 40 5.9 138 132 1/2 " 0.5 3 69.51 0.25% Sector 3 Sector 3 Antenna Antenna Gain Antenna Gain Antenna Gain Antenna Gain Antenna Gain Antenna Gain Antenna Make Additional ERP Power Channel Composite Composite Composite Composite Cable Size Cable Loss Additional Loss (dB) ERP Percentage				<i>.</i>		0,	. ,			<i>,</i>	0 ()				. ,		0
2B RFS APXVTMM14-C-120 RRH 2500 MHz CDMA/LTE 20 2 40 5.9 138 132 1/2 " 0.5 3 69.51 0.25% Sector 3 Sector 3							-		-			-			-		
Sector total Power Density Value: 0.47% Sector 3 Antenna Make Antenna Model Radio Type Frequency Band Technology (Watts) Number Antenna Make Antenna Model Radio Type Frequency Band Technology (Watts) Antenna Make Antenna Model Radio Type Frequency Band Technology (Watts) Antenna Make Antenna Model Radio Type Frequency Band Technology (Watts) Antenna Make Antenna Model Radio Type Frequency Band Technology (Watts) Antenna Make Antenna Model Radio Type Frequency Band Technology (Watts) Antenna Make Antenna Model Radio Type Frequency Band Technology (Watts) Antenna Make Antenna Model Radio Type Frequency Band Technology (Watts) Antenna Make Antenna Model Radio Type Frequency Band Technology (Watts)	-	-							-	-		-			-		
Sector 3 Antenna Antenna Model Radio Type Frequency Band Technology Number of Channels Composite Power Antenna Gain reduction Antenna Gain feight (ft) Antenna feight (ft) Cable Loss Additional Loss (dB) Power Density	ZB	KF5	APXV1IVIIVI14-C-120	ККН	2500 IVIHZ	CDIVIA / LTE	20	2	40	5.9	138	132	,				0.25%
Antenna Number Antenna Model Radio Type Frequency Band Technology (Watts) Channels Power Channels Power reduction) Height (ft) height Cable Size (dB) Loss (dB) ERP Percentage													Sector to	Juli POwer L	vensity value:	0.47%	
Antenna Antenna Model Antenna Model Radio Type Frequency Band Technology (Watts) Channels (Channel Channel Cha								Sector 3									
Antenna Antenna Model Antenna Model Radio Type Frequency Band Technology (Watts) Channels (Channel Channel Cha																	
Antenna Make Antenna Model Radio Type Frequency Band Technology (Watts) (Valuence Channel Valuence Channel V							Power										
Antenna Antenna Mode Antenna Mode Radio Type Frequency Band Channel Number of (Watts) Composite (10 db Antenna analysis Cable Loss Additional Density Number Antenna Mode Antenna Model Radio Type Frequency Band Technology (Watts) Channels Power reduction Height (ft) height Cable Loss Additional ERP Percentage										Antenna Gain							Power
Number Antenna Made Antenna Model Radio Type Frequency Band Technology (Watts) Channels Power reduction Height (ft) height Cable Size (dB) Loss (dB) ERP Percentage	Antenna							Number of	Composite			analysis		Cable Loss	Additional		
		Antenna Make	Antenna Model	Radio Type	Frequency Band	Technology			•	•			Cable Size			FRP	Percentage
							. ,					<u> </u>		. ,	. ,		_
3a RFS APXVSPP18-C-A20 RRH 850 MHz CDMA / LTE 20 1 20 3.4 138 132 1/2 " 0.5 3 19.54 0.07%								-	-						-		
3B RFS APXVTMM14-C-120 RRH 2500 MHz CDMA/LTE 20 2 40 5.9 138 132 1/2" 0.5 3 69.51 0.25%		-							-	-			,		-		
Sector total Power Density Value: 0.47%													,		ensity Value:		

Site Composite MPE %					
Carrier	MPE %				
Sprint	1.40%				
AT&T	14.94%				
T-Mobile	5.56%				
Total Site MPE %	21.90%				



Summary

All calculations performed for this analysis yielded results that were well within the allowable limits for general public Maximum Permissible Exposure (MPE) to radio frequency energy.

The anticipated Maximum Composite contributions from the Sprint facility are **1.40%** (**0.47%** from sector **1**, **0.47%** from sector **2** and **0.47%** from sector **3**) of the allowable FCC established general public limit considering all three sectors simultaneously sampled at the ground level.

The anticipated composite MPE value for this site assuming all carriers present is **21.90%** of the allowable FCC established general public limit sampled at 6 feet above ground level. This total composite site value is based upon MPE values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.

Scott Heffernan RF Engineering Director

EBI Consulting 21 B Street Burlington, MA 01803



FDH Engineering, Inc., 6521 Meridien Drive Raleigh, NC 27616, Ph. 919.755.1012

Structural Analysis for SBA Network Services, Inc.

149' Monopole Tower

SBA Site Name: Southbury SBA Site ID: CT13058-A-02 Sprint Site ID: CT54XC717

FDH Project Number 1462VO1400

Analysis Results

Tower Components	94.9%	Sufficient
Foundation	71.7%	Sufficient

Prepared By: C. Kelley Herrick

C. Kelly Herrick, El **Project Engineer**

FDH Engineering, Inc. 6521 Meridien Drive Raleigh, NC 27616 (919) 755-1012 info@fdh-inc.com

Reviewed By:

Bradley Newman, PE Senior Project Engineer CT PE License No. 29630



April 22, 2014

Prepared pursuant to TIA/EIA-222-F Structural Standards for Steel Antenna Towers and Antenna Supporting Structures and the 2005 Connecticut Building Code

TABLE OF CONTENTS

EXECUTIVE SUMMARY	3
Conclusions	3
Recommendations	3
APPURTENANCE LISTING	
RESULTS	
GENERAL COMMENTS	6
LIMITATIONS	6
APPENDIX	7

EXECUTIVE SUMMARY

At the request of SBA Network Services, Inc., FDH Engineering, Inc. performed a structural analysis of the monopole located in Southbury, CT to determine whether the tower is structurally adequate to support both the existing and proposed loads pursuant to the *Structural Standards for Steel Antenna Towers and Antenna Supporting Structures, TIA/EIA-222-F* and the 2005 Connecticut Building Code (CBC). Information pertaining to the existing/proposed antenna loading, current tower geometry, foundation dimensions, soil parameters, and member sizes was obtained from:

- Sabre Communications Corporation (Job No. 04-10247) Foundation Drawings dated November 25, 2003
- JGI Eastern, Inc. (Project No. 06439G) Geotechnical Evaluation Report dated September 8, 2006
- Sabre Communications Corporation (Job No. 07-07055) Structural Design Report dated September 12, 2006
- FDH, Inc. (Job No. 08-07123T) TIA Inspection Report dated September 15, 2008
- SBA Network Services, Inc.

The *basic design wind speed* per the *TIA/EIA-222-F* standards and the 2005 CBC is 85 mph without ice and 38 mph with 3/4" radial ice. Ice is considered to increase in thickness with height.

Conclusions

With the existing and proposed antennas from Sprint in place at 138 ft, the tower meets the requirements of the *TIA/EIA-222-F* standards and the 2005 CBC provided the **Recommendations** listed below are satisfied. Furthermore, provided the foundation was constructed per the original design drawings (see Sabre Job No. 07-07055) and utilizing the existing soil parameters (see JGI Eastern, Inc. Project No. 06439G), the foundation should have the necessary capacity to support both the proposed and existing loading. For a more detailed description of the analysis of the tower, see the **Results** section of this report.

Our structural analysis has been performed assuming all information provided to FDH Engineering, Inc. is accurate (i.e., the steel data, tower layout, existing antenna loading, and proposed antenna loading) and that the tower has been properly erected and maintained per the original design drawings.

Recommendations

To ensure the requirements of the *TIA/EIA-222-F* standards the 2005 CBC are met with the existing and proposed loading in place, we have the following recommendations:

- 1. The proposed feedlines should be installed inside the monopole's shaft.
- 2. RRU/RRH Stipulation: The equipment may be installed in any arrangement as determined by the client.

APPURTENANCE LISTING

The proposed and existing antennas with their corresponding cables/coax lines are shown in Table 1. If the actual layout determined in the field deviates from the layout, FDH Engineering, Inc. should be contacted to perform a revised analysis.

Table 1 - Appurtenance Loading

Existing Loading:

Antenna Elevation (ft)	Description	Feedlines ¹	Carrier	Mount Elevation (ft)	Mount Type
147	(6) Powerwave 7770.00 (3) KMW AM-X-CD-16-65-00T (6) Powerwave LGP21401 TMAs (6) Powerwave LGP13519 Diplexers	(12) 1-5/8" (1) 0.394" Fiber	New Cingular	147	(1) 13' Low Profile Platform
145	(6) Ericsson RRUS-11 RRUs (1) Raycap DC6-48-60-18-8F Surge Arrestor	(2) 0.774" Power		145	(1) Andrew MTC3335 Collar Mount
138	(3) RFS APXVSPP18-C-A20 (3) ALU 1900 MHz RRUs (3) ALU 800 MHz RRUs (3) ALU 800 MHz Filters (4) RFS ACU-A20-N RETs	(3) 1-1/4"	Sprint	138	(1) 12.5' Low Profile Platform
127.5	(3) RFS APXV18-209014 (6) RFS APX16DWV-16DWVS-A20 (3) RFS ATMPP1412D-1CWA Twin PCS TMAs (3) RFS ATMAA1412D-1A20 Twin AWS TMAs (3) Remec S20057A1 TMAs nstalled inside the pole's shaft, unless otherwise noted	(18) 1-5/8"	T-Mobile	127.5	(1) 13' Low Profile Platform

feedlines installed inside the pole's shaft, unless otherwise noted

Proposed Loading:

Antenna Elevation (ft)	Description	Feedlines ¹	Carrier	Mount Elevation (ft)	Mount Type
138	 (3) RFS APXVSPP18-C-A20 (3) RFS APXVTM14-C-I20 (3) ALU TD-RRH8x20-25 RRUs (3) ALU 1900 MHz RRUs (3) ALU 800 MHz RRUs (3) ALU 800 MHz Filters (4) RFS ACU-A20-N RETs 	(4) 1-1/4"	Sprint	138	(1) 12.5' Low Profile Platform

1. All feedlines installed inside the pole's shaft, unless otherwise noted

RESULTS

The following yield strength of steel for individual members was used for analysis:

Table 2 - Material Strength

Member Type	Yield Strength
Tower Shaft Sections	65 ksi
Base Plate	60 ksi
Anchor Bolts	75 ksi

Table 3 displays the summary of the ratio (as a percentage) of force in the member to their capacities. Values greater than 100% indicate locations where the maximum force in the member exceeds its capacity. *Note: Capacities up to 105% are considered acceptable.* **Table 4** displays the maximum foundation reactions.

If the assumptions outlined in this report differ from actual field conditions, FDH Engineering, Inc. should be contacted to perform a revised analysis. Furthermore, as no information pertaining to the allowable twist and sway requirements for the existing or proposed appurtenances was provided, deflection and rotation were not taken into consideration when performing this analysis.

See the **Appendix** for detailed modeling information.

Table 3 - Summary of Working Percentage of Structural Components

Section No.	Elevation (ft)	Component Type	Size	Capacity (%)	Pass / Fail
L1	149 - 97.5	Pole	TP31.58x20.25x0.1875	94.9	Pass
L2	97.5 - 48	Pole	TP42.1x30.325x0.3125	79.5	Pass
L3	48 - 0	Pole	TP52.03x40.3195x0.3125	93.1	Pass
	٥	Anchor Bolts	(12) 2.25"Ø w/ 58.25"Ø B.C.	86.7	Pass
	U	Base Plate	Sq. PL 56" x 2.75" thk.	67.6	Pass

Table 4 - Maximum Base Reactions

Base Reactions	Current Analysis [*] (TIA/EIA-222-F)	Original Design (ANSI/TIA-222-G)
Axial	29 k	41 k
Shear	23 k	29 k
Moment	2,497 k-ft	3,000 k-ft

* Foundation determined to be adequate per independent analysis.

GENERAL COMMENTS


This engineering analysis is based upon the theoretical capacity of the structure. It is not a condition assessment of the tower and its foundation. It is the responsibility of SBA Network Services, Inc. to verify that the tower modeled and analyzed is the correct structure (with accurate antenna loading information) modeled. If there are substantial modifications to be made or the assumptions made in this analysis are not accurate, FDH Engineering, Inc. should be notified immediately to perform a revised analysis.

LIMITATIONS

All opinions and conclusions are considered accurate to a reasonable degree of engineering certainty based upon the evidence available at the time of this report. All opinions and conclusions are subject to revision based upon receipt of new or additional/updated information. All services are provided exercising a level of care and diligence equivalent to the standard and care of our profession. No other warranty or guarantee, expressed or implied, is offered. Our services are confidential in nature and we will not release this report to any other party without the client's consent. The use of this engineering work is limited to the express purpose for which it was commissioned and it may not be reused, copied, or distributed for any other purpose without the written consent of FDH Engineering, Inc.

Structural Analysis Report SBA Network Services, Inc. SBA Site ID: CT13058-A-02 April 22, 2014

APPENDIX

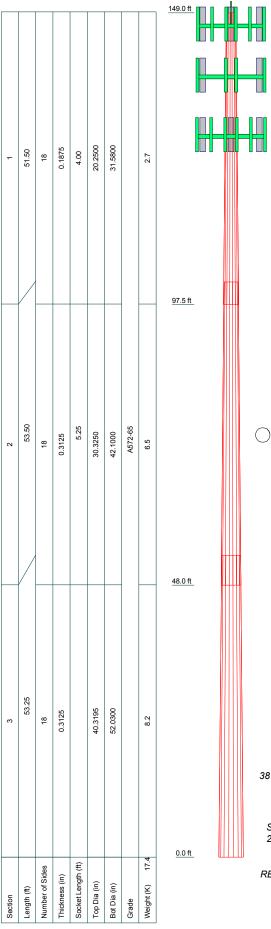

TYPE	ELEVATION	TYPE	ELEVATION
Lightning Rod	149	1900 Mhz RRU	138
(2) 7770.00 w/Mount Pipe	147	1900 Mhz RRU	138
(2) 7770.00 w/Mount Pipe	147	800 Mhz RRU	138
(2) 7770.00 w/Mount Pipe	147	800 Mhz RRU	138
AM-X-CD-16-65-00T-RET w/Mount	147	800 Mhz RRU	138
Pipe		800 Mhz Filter	138
AM-X-CD-16-65-00T-RET w/Mount Pipe	147	800 Mhz Filter	138
AM-X-CD-16-65-00T-RET w/Mount	147	800 Mhz Filter	138
Pipe	147	ACU-A20-N RET	138
(2) LGP21401 TMA	147	ACU-A20-N RET	138
(2) LGP21401 TMA	147	(2) ACU-A20-N RET	138
(2) LGP21401 TMA	147	12.5' Low Profile Platform	138
(2) Powerwave LGP13519 Diplexer	147	(2) Empty Pipe Mount	138
(2) Powerwave LGP13519 Diplexer	147	(2) Empty Pipe Mount	138
(2) Powerwave LGP13519 Diplexer	147	(2) Empty Pipe Mount	138
13' Low Profile Platform	147	RFS APXV18-209014-C w/ Mount Pipe	127.5
Empty Pipe Mount	147	RFS APXV18-209014-C w/ Mount Pipe	127.5
Empty Pipe Mount	147	RFS APXV18-209014-C w/ Mount Pipe	127.5
Empty Pipe Mount	147	(2) RFS APX16DWV-16DWVS-A20 w/	127.5
1.2 1.1 1.1	147	Mount Pipe	
(2) RRUS-11 (2) RRUS-11	145	(2) RFS APX16DWV-16DWVS-A20 w/	127.5
(2) RRUS-11	145	Mount Pipe	
DC6-48-60-18-8F Surge Arrestor	145	(2) RFS APX16DWV-16DWVS-A20 w/ Mount Pipe	127.5
Andrew MTC Collar Mount	145	RFS-ATMPP1412D-1CWA Twin PCS	127.5
APXVSPP18-C-A20 w/Mount Pipe	138	RES-ATMPP1412D-1CWA Twin PCS	127.5
APXVSPP18-C-A20 w/Mount Pipe	138	RFS-ATMPP1412D-1CWA Twin PCS	127.5
APXVSPP18-C-A20 w/Mount Pipe	138	RFS-ATMAA1412D-1A20 Twin AWS	127.5
APXVTM14-C-I20 w/ Mount Pipe	138	RFS-ATMAA1412D-1A20 Twin AWS	127.5
APXVTM14-C-I20 w/ Mount Pipe	138	RFS-ATMAA1412D-1A20 Twin AWS	127.5
APXVTM14-C-I20 w/ Mount Pipe	138	Remec S20057A1	127.5
TD-RRH8x20-25	138	Remec S20057A1	127.5
TD-RRH8x20-25	138	Remec S20057A1	127.5
TD-RRH8x20-25	138	13' Low Profile Platform	127.5
1900 Mhz RRU	138		1

MATERIAL STRENGTH


GRADE	Fy	Fu	GRADE	Fy	Fu
A572-65	65 ksi	80 ksi			

TOWER DESIGN NOTES

Tower is located in New Haven County, Connecticut.
 Tower designed for a 85 mph basic wind in accordance with the TIA/EIA-222-F Standard.
 Tower is also designed for a 38 mph basic wind with 0.75 in ice. Ice is considered to increase in thickness with height.
 Deflections are based upon a 50 mph wind

Deflections are based upon a 50 mph wind.
 TOWER RATING: 94.9%

AXIAL 40 K SHEAR MOMENT 609 kip-ft 5 K /




TORQUE 1 kip-ft REACTIONS - 85 mph WIND




	FDH Engineering, Inc.	^{Job:} Southbury, CT13058-A-02	
4		Project: 1462VO1400	
-	Raleigh, North Carolina 27616	Client: SBA Network Services, Inc. Drawn by: C. Kelly Herrick	App'd:
/sis	Phone: 9197551012	Code: TIA/EIA-222-F Date: 04/22/14	Scale: NTS
	FAX: 9197551031	Path: Uth-senathiserio204 Discise-Cleve DeviceMNET SEAlwares Services IncCTCT10204 Southers CTV400048004564875049504701 CT102064821at	Dwg No. E-1

DESIGNED APPURTENANCE LOADING

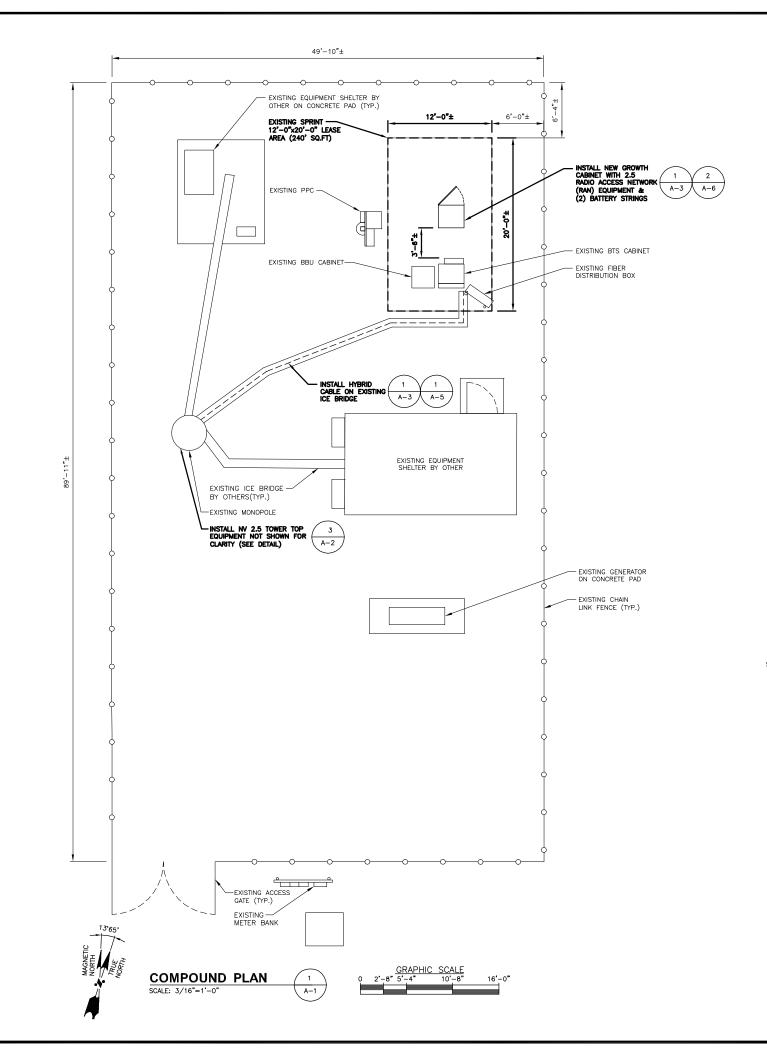



RAN EQUIPMENT PHOTO DETAIL

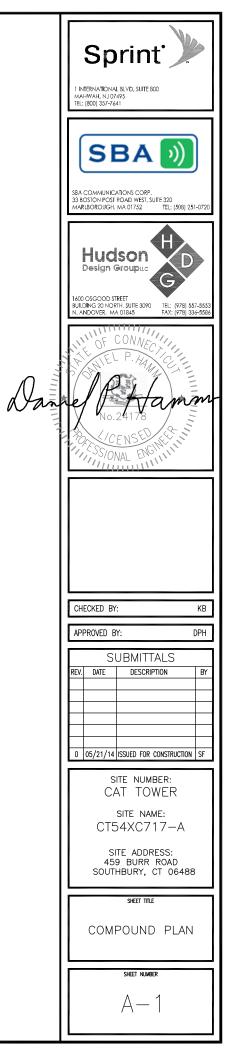



2 A-1

