



10 INDUSTRIAL AVE,
SUITE 3
MAHWAH NJ 07430

PHONE: 201.684.0055
FAX: 201.684.0066

1/14 /2021

Members of the Siting Council
Connecticut Siting Council
Ten Franklin Square
New Britain, CT 06051

RE: Notice of Exempt Modification
9 South Road, Stafford Springs, CT 06077
AKA: 35 South Road, Stafford, CT 06076
Latitude: 41.96856666
Longitude: -72.23814722
T-Mobile/Sprint Site#: CTHA826A-CT33XC004

Dear Ms. Bachman:

T-Mobile/Sprint currently maintains six (6) antennas at the 180-foot level of the existing 180-foot guyed tower at 9 South Road, Stafford Springs, CT. The 180-foot guyed tower is owned and operated by EIP Communications I, LLC. The property is owned by James Tumel & Raenna Jo Zelonka Tumel. T-Mobile/Sprint now intends to remove the six (6) existing antennas and add nine (9) new 600/700/1900/2100/2500 MHz antennas. The new antennas will be installed at the 180-foot level of the tower and will support 5G services.

Planned Modifications:

Tower:

Remove:

(4) 1 ¼' Lines

Remove:

- (3) Commscope DT465B-2XR Antennas
- (3) RFS APXV9ERR18-C-A20 Antennas
- (3) Alcatel Lucent 4x45-AWS RRH
- (3) Alcatel Lucent 8x20-25 RRH
- (3) Alcatel Lucent 2x50-800 RRH

Install New:

- (3) RFS APXVAALL24 43-U-NA20 Antennas
- (3) Ericsson Air6449 B41 Antennas
- (3) Commscope W-65A-R1 Antennas
- (3) Ericsson Radio 4460 B25+B66 RRH
- (3) Ericsson Radio 4480 B71+B85 RRH
- (2) 6x24 Hybrid Cables

(1) 6x12 Hybrid Cable

Ground:

Existing To Remain:

(1) Telco Box

(1) 200A PPC Cabinet

Remove:

(1) Sprint MMBTS Cabinet

(1) Sprint BBU Cabinet

(1) Hoffman Box

(1) 100A Circuit Breaker

Install New:

(1) B160 Cabinet

(1) 6160 Cabinet

(1) 150 Circuit Breaker in Existing 200A PPC Cabinet

The earliest CT Siting Council Approval able to be found was issued to Sprint on May 30, 2014.

The original Building permit for the actual tower construction issued by the Town was unavailable, but enclosed please find a Building Permit from June 11, 2014. T-Mobile/Sprint has been approved for subsequent modifications at their facility.

Please accept this letter as notification pursuant to Regulations of Connecticut State Agencies § 16-50j-73, for construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-72(b)(2). In accordance with R.C.S.A. § 16-50j-73, a copy of this letter is being sent to First Selectman Sal P. Titus, Elected Official, and David Perkins, Acting Zoning Enforcement Official, as well as the tower and property owner.

The planned modifications to the facility fall squarely within those activities explicitly provided for in R.C.S.A. § 16-50j-72(b)(2).

1. The proposed modifications will not result in an increase in the height of the existing structure.
2. The proposed modifications will not require the extension of the site boundary.
3. The proposed modifications will not increase noise levels at the facility by six decibels or more, or to levels that exceed state and local criteria.
4. The operation of the replacement antennas will not increase radio frequency emissions at the facility to a level at or above the Federal Communications Commission safety standard.
5. The proposed modifications will not cause a change or alteration in the physical or environmental characteristics of the site.
6. The existing structure and its foundation can support the proposed loading.

For the foregoing reasons, T-Mobile/Sprint respectfully submits that the proposed modifications to the above referenced telecommunications facility constitute an exempt modification under R.C.S.A. § 16-50j-72(b)(2).

Sincerely,

Dave DePinto

Transcend Wireless

Cell: 973-907-3243

Email: ddepinto@transcendwireless.com

Attachments

cc: Sal P. Titus – First Selectman of the Town of Stafford

David Perkins– Acting Zoning Official

EIP Communications I, LLC – Tower Owner

James Tumel & Raenna Jo Zelonka Tumel- Property Owner



☆
Your shipment from
TRANSCEND WIRELESS

Estimated delivery
Wednesday, January 19 **between** 9:30 A.M. - 11:30 A.M.

- Label Created
- On the Way
- Out for Delivery
- Delivery

Ship To
EIP COMMUNICATIONS I, LLC
LEGAL DEPT
2 ALLEGHENY CENTER
NOVA TOWER 2, SUITE 703
SITE ID: 702496 (STAFFORD 2 CDT)
PITTSBURGH, PA 15212 US

Get Updates > [Change My Delivery](#) [View Details](#)

Track Another Package

[Track](#)

UPS Delivery Notification, Tracking Number 1ZV257420399897279

UPS <pkginfo@ups.com>
To: DDEPINTO@transcendwireless.com

Tue, Jan 18, 2022 at 11:36 AM



Hello, your package has been delivered.


Delivery Date: Tuesday, 01/18/2022

Delivery Time: 11:35 AM

Left At: FRONT DOOR

Experience UPS My Choice® Premium Today
Be in total control of how, when and where your packages are delivered.

[Upgrade to Premium Now](#)



[Set Delivery Instructions](#)

[Manage Preferences](#)

[View My Packages](#)

TRANSCEND WIRELESS

Tracking Number:	1ZV257420399897279
Ship To:	TUMEL JAMES+RAEANNA JOZELONKA TUMEL 25 LEONARD ROAD STAFFORD, CT 06076 US
Number of Packages:	1
UPS Service:	UPS Ground
Package Weight:	1.8 LBS
Reference Number:	CTHA826A-CT33XC004



[Download the UPS mobile app](#)

All trademarks, trade names, or service marks that appear in connection with UPS's services are the property of their respective owners.

Please do not reply directly to this email.

[Manage Your UPS My Choice Delivery Alerts](#)

[Review the UPS Privacy Notice](#)

[Review the UPS My Choice Service Terms](#)

UPS Delivery Notification, Tracking Number 1ZV257420399467288

UPS <pkginfo@ups.com>
To: DDEPINTO@transcendwireless.com

Tue, Jan 18, 2022 at 10:41 AM



Hello, your package has been delivered.

Delivery Date: Tuesday, 01/18/2022

Delivery Time: 10:36 AM

Left At: OFFICE

Signed by: DUNN

TRANSCEND WIRELESS

Tracking Number:	1ZV257420399467288
Ship To:	TOWN OF STAFFORD, CT 1 MAIN STREET 1ST FLOOR STAFFORD SPRINGS, CT 06076 US
Number of Packages:	1
UPS Service:	UPS Ground
Package Weight:	1.8 LBS
Reference Number:	CTHA826A-CT33XC004



[Download the UPS mobile app](#)

© 2022 United Parcel Service of America, Inc. UPS, the UPS brandmark, and the color brown are trademarks of United Parcel Service of America, Inc. All rights reserved.

All trademarks, trade names, or service marks that appear in connection with UPS's services are the property of their respective owners.

Please do not reply directly to this email. UPS will not receive any reply message.

[Review the UPS Privacy Notice](#)

[For Questions, Visit Our Help and Support Center](#)

UPS Delivery Notification, Tracking Number 1ZV257420392304037

UPS <pkginfo@ups.com>
To: DDEPINTO@transcendwireless.com

Tue, Jan 18, 2022 at 10:41 AM

**Hello, your package has been delivered.****Delivery Date:** Tuesday, 01/18/2022**Delivery Time:** 10:37 AM**Left At:** OFFICE**Signed by:** DADAULT**TRANSCEND WIRELESS**

Tracking Number:	1ZV257420392304037
Ship To:	TOWN OF STAFFORD, CT 1 MAIN STREET STAFFORD, CT 06076 US
Number of Packages:	1
UPS Service:	UPS Ground
Package Weight:	1.8 LBS
Reference Number:	CTHA826A-CT33XC004

[Download the UPS mobile app](#)


© 2022 United Parcel Service of America, Inc. UPS, the UPS brandmark, and the color brown are trademarks of United Parcel Service of America, Inc. All rights reserved.

All trademarks, trade names, or service marks that appear in connection with UPS's services are the property of their respective owners.

Please do not reply directly to this email. UPS will not receive any reply message.

[Review the UPS Privacy Notice](#)

35 South Road, Stafford, CT 06076

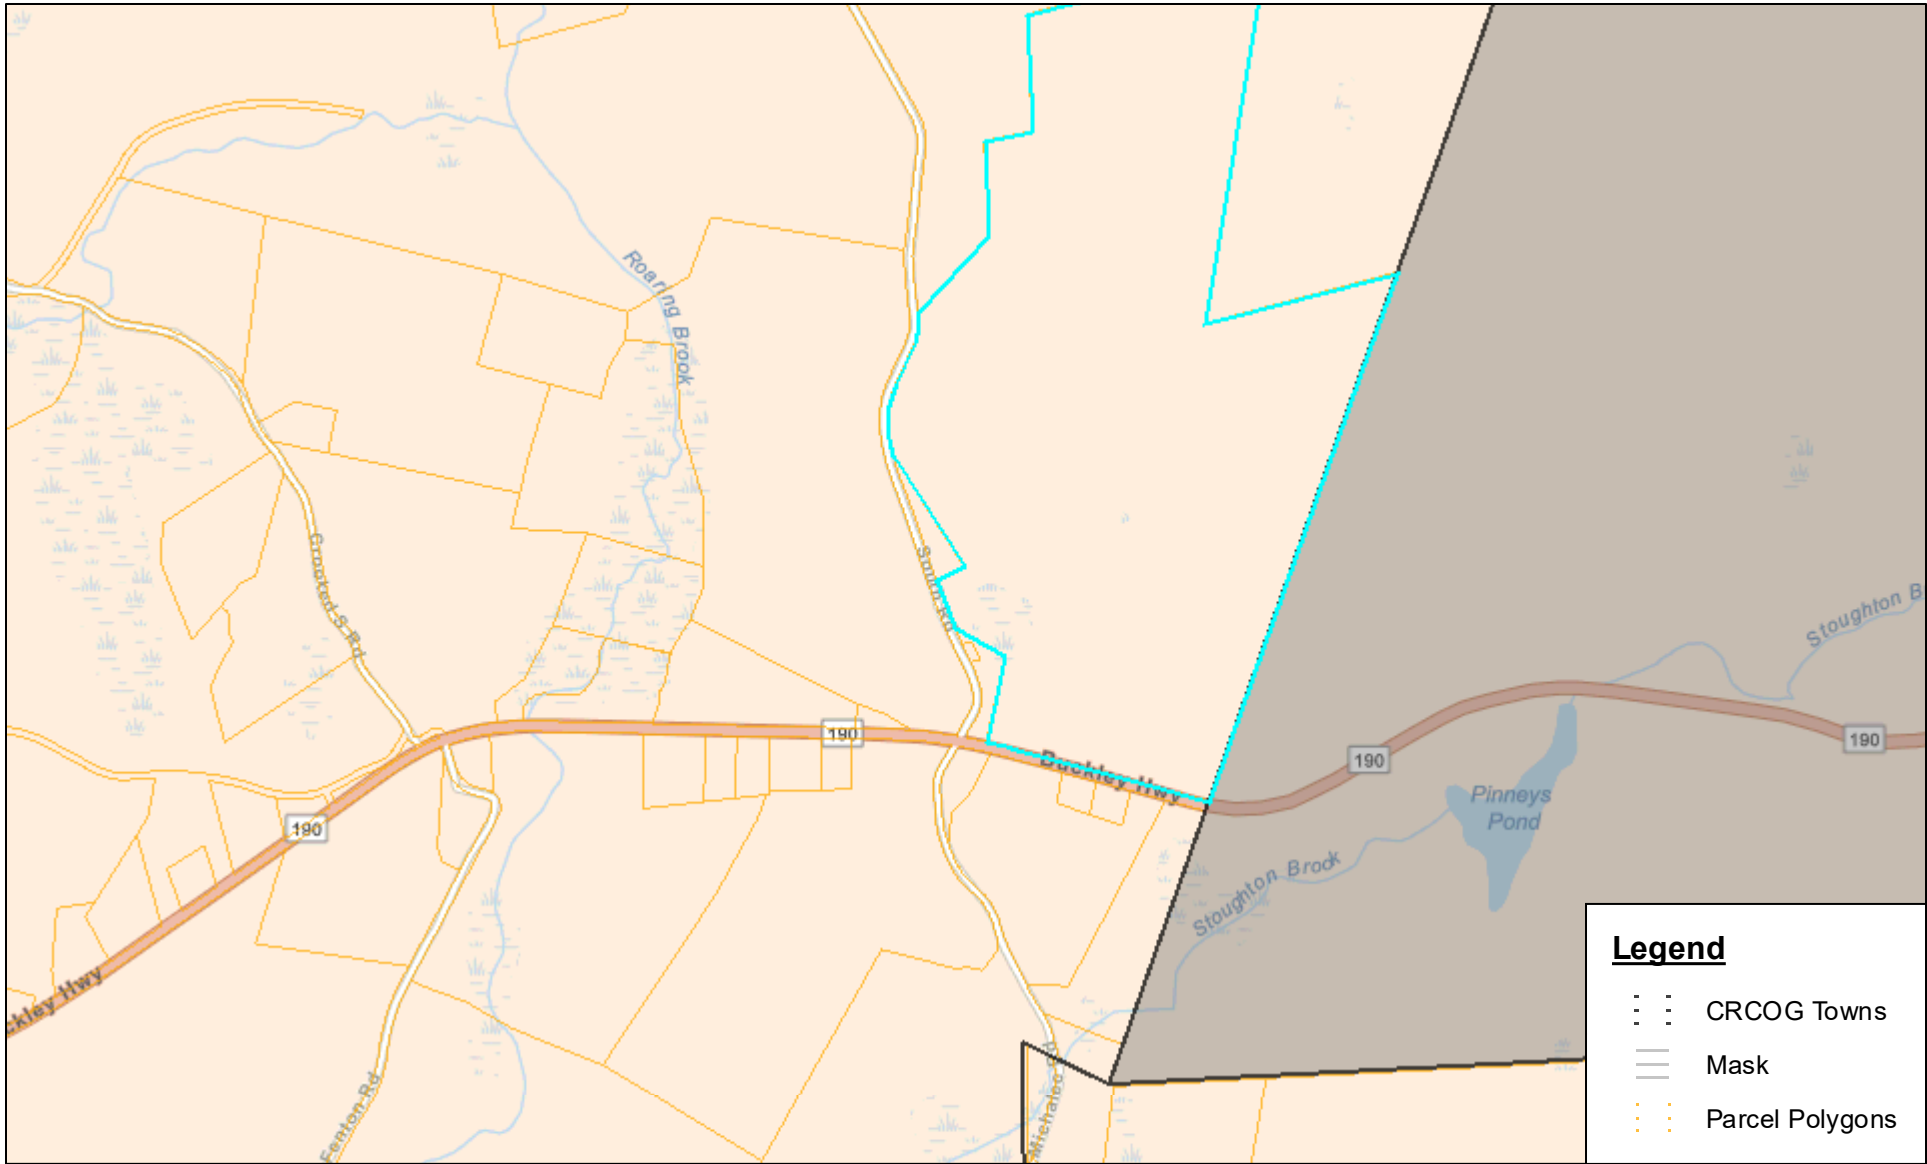

Legend

- ⋮ CRCOG Towns
- Mask
- ⋮ Parcel Polygons



CRCOG CAPITAL REGION
COUNCIL OF GOVERNMENTS
Working together for a better region.

CRCOG makes no claims and no warranties, expressed or implied, concerning the validity or accuracy of the GIS data presented on this map.

Scale
1:18,056
Created: 1/14/2022

35 SOUTH RD

Location 35 SOUTH RD

Mblu 42 / 9 / 1

Acct# 00236500

Owner TUMEL JAMES+RAEANNA JO
ZELONKA TUMEL

Assessment \$178,760

Appraisal \$534,300

PID 2687

Building Count 1

Current Value

Appraisal			
Valuation Year	Improvements	Land	Total
2020	\$129,700	\$404,600	\$534,300
Assessment			
Valuation Year	Improvements	Land	Total
2020	\$90,790	\$87,970	\$178,760

Owner of Record

Owner TUMEL JAMES+RAEANNA JO ZELONKA TUMEL
Co-Owner
Address 25 LEONARD RD
 STAFFORD SPRINGS, CT 06076

Sale Price \$0
Certificate
Book & Page 0673/0717
Sale Date 08/07/2019
Instrument 02

Ownership History

Ownership History

Owner	Sale Price	Certificate	Book & Page	Instrument	Sale Date
TUMEL JAMES+RAEANNA JO ZELONKA TUMEL	\$0		0673/0717	02	08/07/2019
TUMEL JAMES	\$0		0671/0556		06/10/2019
TUMEL JAMES	\$0		0671/0552		06/10/2019
TUMMEL JAMES	\$0		0671/0538	25	06/10/2019
TUMMEL JAMES	\$0		0598/0545	01	01/10/2013

Building Information

Building 1 : Section 1

Year Built: 1991
Living Area: 1,326
Replacement Cost: \$155,398
Building Percent Good: 82
**Replacement Cost
Less Depreciation:** \$127,400

Building Attributes	
Field	Description
Style	Cape
Model	Residential
Grade:	C
Stories	1.5
Occupancy	1
Exterior Wall 1	Clapboard
Exterior Wall 2	
Roof Structure	Gable
Roof Cover	Asphalt
Interior Wall 1	Minimum
Interior Wall 2	
Interior Flr 1	Hardwood
Interior Flr 2	


Building Photo



(<http://images.vgsi.com/photos2/StaffordCTPhotos//default.jpg>)

Heat Fuel	Oil
Heat Type:	Hot Water
AC Type:	None
Total Bedrooms:	1
Full Bthrms:	1
Half Baths:	1
Extra Fixtures	0
Total Rooms:	4
Bath Style:	Average
Kitchen Style:	Average
Num Kitchens	1
Fireplaces	1
Extra Openings	
Prefab Fpl(s)	
Attic Type	None
Bsmt Type	Full
Bsmt Garage(s)	0
Fin Bsmt	0
Fn. Bmt. Qual.	
Unfin Area	0.00

Building Layout

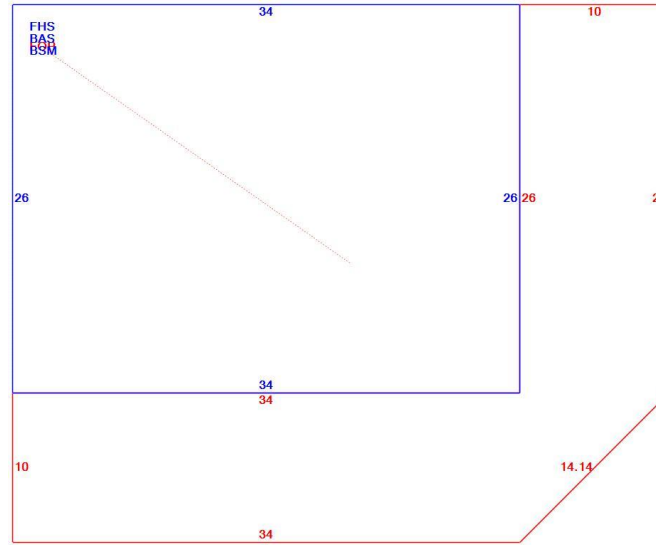

(ParcelSketch.ashx?pid=2687&bid=2687)

Building Sub-Areas (sq ft)			<u>Legend</u>
Code	Description	Gross Area	Living Area
BAS	First Floor	884	884
FHS	Finished Half Story	884	442
BSM	Basement	884	0
FOP	Open Porch	650	0
		3,302	1,326

Extra Features

Extra Features	<u>Legend</u>
No Data for Extra Features	

Land

Land Use

Land Line Valuation

Use Code 101
Description Res Dwelling
Zone
Neighborhood 240
Alt Land Appr No
Category

Size (Acres) 169.69
Frontage
Depth
Assessed Value \$87,970
Appraised Value \$404,600

Outbuildings

Outbuildings						<u>Legend</u>
Code	Description	Sub Code	Sub Description	Size	Value	Bldg #
FOP	Porch			400.00 S.F.	\$2,300	1

Valuation History

Appraisal			
Valuation Year	Improvements	Land	Total
2019	\$123,000	\$463,400	\$586,400
2018	\$123,000	\$648,300	\$771,300
2017	\$123,000	\$648,300	\$771,300

Assessment			
Valuation Year	Improvements	Land	Total
2019	\$86,100	\$77,730	\$163,830
2018	\$86,100	\$195,970	\$282,070
2017	\$86,100	\$195,970	\$282,070



SPRINT ID: CT33XC004

SITE ID: CTHA826A

9 SOUTH ROAD


STAFFORD SPRINGS, CT 06077

T-MOBILE A+L TEMPLATE (PROVIDED BY RFDS)
67E5A998E_1xAIR+1OP+1QP

T-MOBILE RAN TEMPLATE (PROVIDED BY RFDS)
67E5A998E 6160

- GENERAL NOTES**
- ALL WORK SHALL BE IN ACCORDANCE WITH THE 2015 INTERNATIONAL BUILDING CODE AS MODIFIED BY THE 2018 CONNECTICUT SUPPLEMENT, INCLUDING THE I/A/EIA-222 REVISION "G" "STRUCTURAL STANDARDS FOR STEEL ANTENNA TOWERS AND SUPPORTING STRUCTURES." 2017 CONNECTICUT FIRE SAFETY CODE, NATIONAL ELECTRICAL CODE AND LOCAL CODES.
 - CONTRACTOR SHALL REVIEW ALL DRAWINGS AND SPECIFICATIONS IN THE CONTRACT DOCUMENT SET. CONTRACTOR SHALL COORDINATE ALL WORK SHOWN IN THE SET OF DRAWINGS. THE CONTRACTOR SHALL PROVIDE A COMPLETE SET OF DRAWINGS TO ALL SUBCONTRACTORS AND ALL RELATED PARTIES. THE SUBCONTRACTORS SHALL EXAMINE ALL THE DRAWINGS AND SPECIFICATIONS FOR THE INFORMATION THAT AFFECTS THEIR WORK.
 - CONTRACTOR SHALL PROVIDE A COMPLETE BUILD-OUT WITH ALL FINISHES, STRUCTURAL, MECHANICAL, AND ELECTRICAL COMPONENTS AND PROVIDE ALL ITEMS AS SHOWN OR INDICATED ON THE DRAWINGS OR IN THE WRITTEN SPECIFICATIONS.
 - CONTRACTOR SHALL FURNISH ALL MATERIAL, LABOR AND EQUIPMENT TO COMPLETE THE WORK AND FURNISH A COMPLETED JOB ALL IN ACCORDANCE WITH LOCAL AND STATE GOVERNING AUTHORITIES AND OTHER AUTHORITIES HAVING LAWFUL JURISDICTION OVER THE WORK.
 - CONTRACTOR SHALL SECURE AND PAY FOR ALL PERMITS AND ALL INSPECTIONS REQUIRED AND SHALL ALSO PAY FEES REQUIRED FOR THE GENERAL CONSTRUCTION, PLUMBING, ELECTRICAL, AND HVAC. PERMITS SHALL BE PAID FOR BY THE RESPECTIVE SUBCONTRACTORS.
 - CONTRACTOR SHALL MAINTAIN A CURRENT SET OF DRAWINGS AND SPECIFICATIONS ON SITE AT ALL TIMES AND INSURE DISTRIBUTION OF NEW DRAWINGS TO SUBCONTRACTORS AND OTHER RELEVANT PARTIES AS SOON AS THEY ARE MADE AVAILABLE. ALL OLD DRAWINGS SHALL BE MARKED VOID AND REMOVED FROM THE CONTRACT AREA. THE CONTRACTOR SHALL FURNISH AN "AS-BUILT" SET OF DRAWINGS TO OWNER UPON COMPLETION OF PROJECT.
 - LOCATION OF EQUIPMENT, AND WORK SUPPLIED BY OTHERS THAT IS DIAGRAMMATICALLY INDICATED ON THE DRAWINGS SHALL BE DETERMINED BY THE CONTRACTOR. THE CONTRACTOR SHALL DETERMINE LOCATIONS AND DIMENSIONS SUBJECT TO STRUCTURAL CONDITIONS AND WORK OF THE SUBCONTRACTORS.
 - THE CONTRACTOR IS SOLELY RESPONSIBLE TO DETERMINE CONSTRUCTION PROCEDURE AND SEQUENCE AND TO ENSURE THE SAFETY OF THE EXISTING STRUCTURES AND ITS COMPONENT PARTS DURING CONSTRUCTION. THIS INCLUDES THE ADDITION OF WHATEVER SHORING, BRACING, UNDERPINNINGS, ETC. THAT MAY BE NECESSARY.
 - DRAWINGS INDICATE THE MINIMUM STANDARDS, BUT IF ANY WORK SHOULD BE INDICATED TO BE SUBSTANDARD TO ANY ORDINANCES, LAWS, CODES, RULES, OR REGULATIONS BEARING ON THE WORK, THE CONTRACTOR SHALL INCLUDE IN HIS WORK AND SHALL EXECUTE THE WORK CORRECTLY IN ACCORDANCE WITH SUCH ORDINANCES, LAWS, CODES, RULES OR REGULATIONS WITH NO INCREASE IN COSTS.
 - ALL UTILITY WORK SHALL BE IN ACCORDANCE WITH LOCAL UTILITY COMPANY REQUIREMENTS AND SPECIFICATIONS.
 - ALL EQUIPMENT AND PRODUCTS PURCHASED ARE TO BE REVIEWED BY CONTRACTOR AND ALL APPLICABLE SUBCONTRACTORS FOR ANY CONDITION PER MANUFACTURER'S RECOMMENDATIONS. CONTRACTOR TO SUPPLY THESE ITEMS AT NO COST TO OWNER OR CONSTRUCTION MANAGER.
 - ANY AND ALL ERRORS, DISCREPANCIES, AND 'MISSED' ITEMS ARE TO BE BROUGHT TO THE ATTENTION OF THE T-MOBILE CONSTRUCTION MANAGER DURING THE BIDDING PROCESS BY THE CONTRACTOR. ALL THESE ITEMS ARE TO BE INCLUDED IN THE BID. NO 'EXTRA' WILL BE ALLOWED FOR MISSED ITEMS.
 - CONTRACTOR SHALL BE RESPONSIBLE FOR ALL ON-SITE SAFETY FROM THE TIME THE JOB IS AWARDED UNTIL ALL WORK IS COMPLETE AND ACCEPTED BY THE OWNER.
 - CONTRACTOR TO REVIEW ALL SHOP DRAWINGS AND SUBMIT COPY TO ENGINEER FOR APPROVAL. DRAWINGS MUST BEAR THE CHECKER'S INITIALS BEFORE SUBMITTING TO THE CONSTRUCTION MANAGER FOR REVIEW.
 - THE CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS, ELEVATIONS, ANGLES AND EXISTING CONDITIONS AT THE SITE, PRIOR TO FABRICATION AND/OR INSTALLATION OF ANY WORK IN THE CONTRACT AREA.
 - COORDINATION, LAYOUT, FURNISHING AND INSTALLATION OF CONDUITS AND ALL APPURTENANCES REQUIRED FOR PROPER INSTALLATION OF ELECTRICAL AND TELECOMMUNICATION SERVICE SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
 - ALL DAMAGE CAUSED TO ANY EXISTING STRUCTURE SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR. THE CONTRACTOR WILL BE HELD LIABLE FOR ALL REPAIRS REQUIRED FOR EXISTING STRUCTURES IF DAMAGED DURING CONSTRUCTION ACTIVITIES.
 - THE CONTRACTOR SHALL CONTACT 'CALL BEFORE YOU DIG' AT LEAST 48 HOURS PRIOR TO ANY EXCAVATIONS AT 1-800-922-4455. ALL UTILITIES SHALL BE IDENTIFIED AND CLEARLY MARKED. CONTRACTOR SHALL MAINTAIN AND PROTECT MARKED UTILITIES THROUGHOUT PROJECT COMPLETION.
 - CONTRACTOR SHALL COMPLY WITH THE OWNER'S ENVIRONMENTAL ENGINEER ON ALL METHODS AND PROVISIONS FOR ALL EXCAVATION ACTIVITIES INCLUDING SOIL DISPOSAL. ALL BACKFILL MATERIALS TO BE PROVIDED BY THE CONTRACTOR.

- SITE DIRECTIONS**
- FROM:** 35 GRIFFIN ROAD SOUTH BLOOMFIELD, CT 06002 **TO:** 9 SOUTH ROAD STAFFORD SPRINGS, CT 06077
- START OUT GOING NORTH ON GRIFFIN RD TOWARD HARTMAN RD. 0.30 MI.
 - TURN RIGHT ONTO DAY HILL RD. 0.14 MI.
 - TAKE THE 1ST RIGHT ONTO BLUE HILLS AVENUE EXT/CT-187. CONTINUE TO FOLLOW CT-187. 0.64 MI.
 - STAY STRAIGHT TO GO ONTO BLUE HILLS AVE/CT-187. 4.03 MI.
 - TURN LEFT ONTO COTTAGE GROVE RD/CT-218. CONTINUE TO FOLLOW CT-218. 1.03 MI.
 - MERGE ONTO I-291 E TOWARD SOUTH WINDSOR. 6.15 MI.
 - MERGE ONTO I-84 E VIA THE EXIT ON THE LEFT TOWARD BOSTON. 19.02 MI.
 - TAKE THE CT-320/RUBY RD EXIT, EXIT 71. 0.24 MI.
 - TURN LEFT ONTO RUBY RD/CT-320. 0.15 MI.
 - TURN LEFT ONTO RUBY RD/CT-320. CONTINUE TO FOLLOW CT-320. 0.24 MI.
 - CT-320 BECOMES LOHSE RD. 0.09 MI.
 - LOHSE RD BECOMES MIHALIAK RD. 1.46 MI.
 - MIHALIAK RD BECOMES OLD COUNTY RD. 0.35 MI.
 - TURN LEFT ONTO MICHELEC RD. 1.37 MI.
 - MICHELEC RD BECOMES SOUTH RD (PORTIONS UNPAVED). 0.10 MI.
 - FOLLOW ROAD FOR HALF A MILE, TAKE 2ND SERVICE ROAD ON RIGHT, TAKE 1ST LEFT TO TOWER.

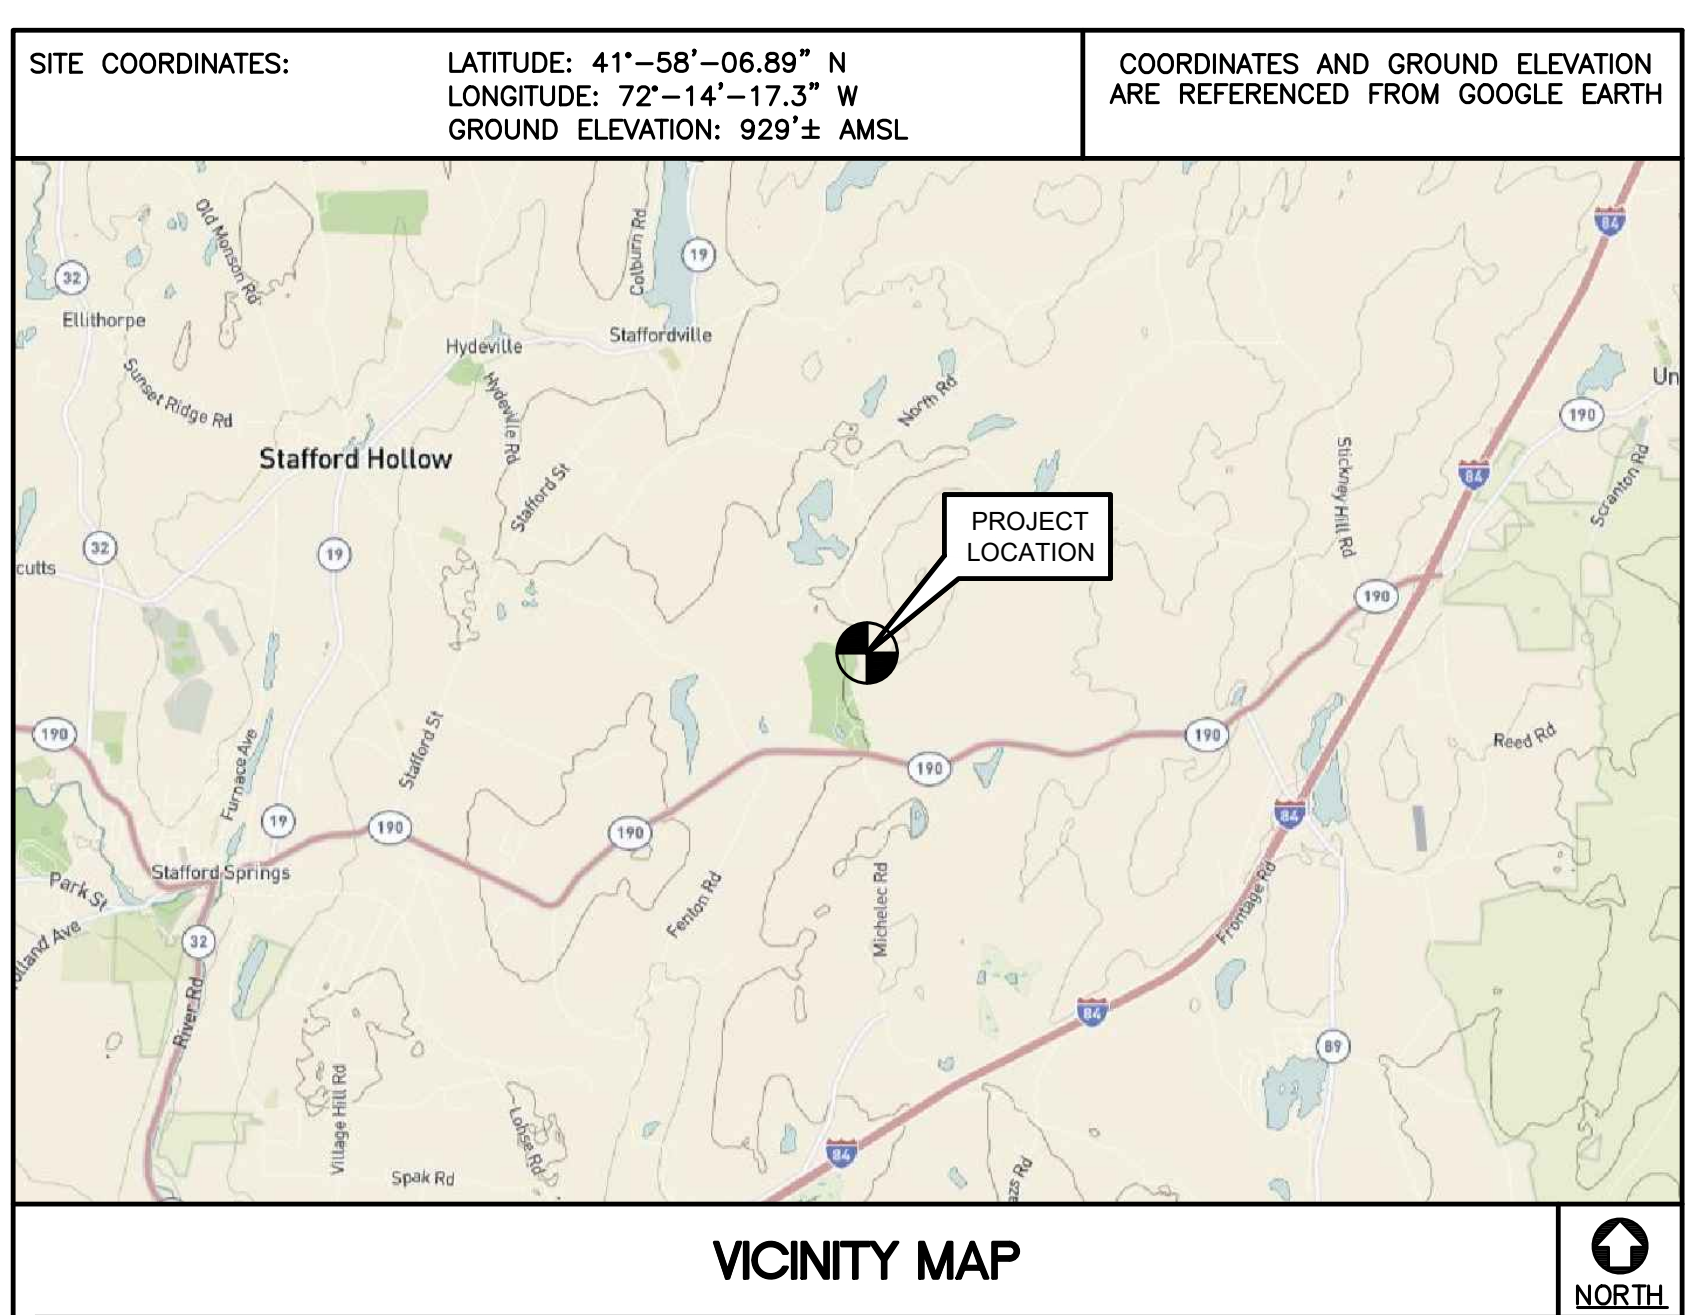

- PROJECT SUMMARY**
- THE PROPOSED SCOPE OF WORK CONSISTS OF A MODIFICATION TO THE EXISTING UNMANNED TELECOMMUNICATIONS FACILITY INCLUDING THE FOLLOWING:
- INSTALL (1) COMMSCOPE: WV-65A-R1 ANTENNAS PER SECTOR, TOTAL OF (3).
 - INSTALL (1) RFS APXVAARR24_43-U-NA20 ANTENNAS PER SECTOR, TOTAL OF (3).
 - INSTALL (1) ERICSSON AIR6449 ANTENNAS PER SECTOR, TOTAL OF (3).
 - INSTALL (1) RRU 4480 B71+B85 PER SECTOR, TOTAL OF (3).
 - INSTALL (1) RRU 4460 B25+B66 PER SECTOR, TOTAL OF (3).
 - INSTALL (3) HYBRID CABLES - (2) HYBRID TRUNK 6/24 4AWG & (1) 6x12 HCS 4AWG
 - INSTALL (1) ENCLOSURE 6160 & (1) ENCLOSURE B160 CABINETS.
 - REMOVE (1) EXISTING COMMSCOPE DT465B-2XR ANTENNAS PER SECTOR, TOTAL OF (3).
 - REMOVE (1) EXISTING RFS APXV9ERR18-C-A20 ANTENNAS PER SECTOR, TOTAL OF (3).
 - REMOVE (1) EXISTING ALCATEL LUCENT 4x45W RRU PER SECTOR, TOTAL OF (3).
 - REMOVE (1) EXISTING ALCATEL LUCENT 8x20-25 RRU PER SECTOR, TOTAL OF (3).
 - REMOVE (1) EXISTING ALCATEL LUCENT 2x50W RRU PER SECTOR, TOTAL OF (3).

PROJECT INFORMATION

SPRINT ID: CT33XC004
SITE ID: CTHA826A
SITE ADDRESS: 9 SOUTH ROAD STAFFORD SPRINGS, CT 06077
APPLICANT: T-MOBILE NORTHEAST, LLC 35 GRIFFIN ROAD SOUTH BLOOMFIELD, CT 06002
CONTACT PERSON: KYLE RICHERS TRANSCEND WIRELESS, LLC (908) 447-4716
ENGINEER OF RECORD: CENTEK ENGINEERING, INC. 63-2 NORTH BRANFORD RD. BRANFORD, CT 06405 CARLO F. CENTORE, PE (203) 488-0580 EXT. 122
PROJECT COORDINATES: LATITUDE: 41°-58'-06.89" N
LONGITUDE: 72°-14'-17.3" W
GROUND ELEVATION: 929'± AMSL
SITE COORDINATES AND GROUND ELEVATION REFERENCED FROM GOOGLE EARTH.

SHEET INDEX

SHT. NO.	DESCRIPTION	REV.
T-1	TITLE SHEET	2
N-1	GENERAL NOTES AND SPECIFICATIONS	2
C-1	SITE LOCATION PLAN	2
C-2	COMPOUND PLAN & ELEVATION	2
C-3	EQUIPMENT PLANS	2
C-4	ANTENNA PLANS & ELEVATIONS	2
C-5	TYPICAL EQUIPMENT DETAILS	2
E-1	ELECTRICAL RISER DIAGRAM AND CONDUIT ROUTING	2
E-2	TYPICAL ELECTRICAL DETAILS	2
E-3	ELECTRICAL SPECIFICATIONS	2

PROFESSIONAL ENGINEER SEAL

SPRINT Now part of T-Mobile
Transcend Wireless

CENTEK engineering
Continued on Submittals

(203) 488-0580
(203) 488-6567 Fax
63-2 North Branford Road
Branford, CT 06405
www.CentekEng.com

T-MOBILE NORTHEAST LLC
SPRINT ID: CT33XC004
SITE ID: CTHA826A
9 SOUTH ROAD
STAFFORD SPRINGS, CT 06077

DATE: 05/28/21
SCALE: AS NOTED
JOB NO. 21005.31

TITLE SHEET

T-1

Sheet No. 1 of 10

REV.	DATE	BY	DESCRIPTION
0	05/28/21	REV	ISSUED FOR CONSTRUCTION
1	06/24/21	REV	ISSUED FOR CONSTRUCTION
2	12/20/21	REV	REVISED PER UPDATED SA
		RTS	CONSTRUCTION DRAWINGS - REVISED PER NEW RFDS
		TUR	CONSTRUCTION DRAWINGS - REVISED PER NEW RFDS
		TUR	CONSTRUCTION DRAWINGS - ISSUED FOR CONSTRUCTION
		CHK'D BY	DESCRIPTION

NOTES AND SPECIFICATIONS

DESIGN BASIS:

GOVERNING CODE: 2015 INTERNATIONAL BUILDING (IBC) AS MODIFIED BY THE 2018 CONNECTICUT STATE BUILDING CODE.





- 1. DESIGN CRITERIA:
 - RISK CATEGORY II (BASED ON IBC TABLE 1604.5)
 - NOMINAL DESIGN SPEED (OTHER STRUCTURE): 124 MPH (V_{wind}) (EXPOSURE B/ IMPORTANCE FACTOR 1.0 BASED ON ASCE 7-10).

SITE NOTES

1. THE CONTRACTOR SHALL CALL UTILITIES PRIOR TO THE START OF CONSTRUCTION.
2. ACTIVE EXISTING UTILITIES, WHERE ENCOUNTERED IN THE WORK, SHALL BE PROTECTED AT ALL TIMES. THE ENGINEER SHALL BE NOTIFIED IMMEDIATELY, PRIOR TO PROCEEDING. SHOULD ANY UNCOVERED EXISTING UTILITY PRECLUDE COMPLETION OF THE WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
3. THE AREAS OF THE COMPOUND DISTURBED BY THE WORK SHALL BE RETURNED TO THEIR ORIGINAL CONDITION.
4. CONTRACTOR SHALL MINIMIZE DISTURBANCE TO EXISTING SITE DURING CONSTRUCTION. EROSION CONTROL MEASURES, SHALL BE IN CONFORMANCE WITH THE LOCAL GUIDELINES FOR EROSION AND SEDIMENT CONTROL.
5. IF ANY FIELD CONDITIONS EXIST WHICH PRECLUDE COMPLIANCE WITH THE DRAWINGS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER AND SHALL PROCEED WITH AFFECTED WORK AFTER CONFLICT IS SATISFACTORILY RESOLVED.

GENERAL NOTES

1. ALL WORK SHALL BE IN ACCORDANCE WITH THE 2015 INTERNATIONAL BUILDING CODE AS MODIFIED BY THE 2018 CONNECTICUT SUPPLEMENT, INCLUDING THE TIA/EIA-222 REVISION "G" "STRUCTURAL STANDARDS FOR STEEL ANTENNA TOWERS AND SUPPORTING STRUCTURES." 2017 CONNECTICUT FIRE SAFETY CODE, NATIONAL ELECTRICAL CODE AND LOCAL CODES.
2. CONTRACTOR SHALL REVIEW ALL DRAWINGS AND SPECIFICATIONS IN THE CONTRACT DOCUMENT SET. CONTRACTOR SHALL COORDINATE ALL WORK SHOWN IN THE SET OF DRAWINGS. THE CONTRACTOR SHALL PROVIDE A COMPLETE SET OF DRAWINGS TO ALL SUBCONTRACTORS AND ALL RELATED PARTIES. THE SUBCONTRACTORS SHALL EXAMINE ALL THE DRAWINGS AND SPECIFICATIONS FOR THE INFORMATION THAT AFFECTS THEIR WORK.
3. CONTRACTOR SHALL PROVIDE A COMPLETE BUILD-OUT WITH ALL FINISHES, STRUCTURAL, MECHANICAL, AND ELECTRICAL COMPONENTS AND PROVIDE ALL ITEMS AS SHOWN OR INDICATED ON THE DRAWINGS OR IN THE WRITTEN SPECIFICATIONS.
4. CONTRACTOR SHALL FURNISH ALL MATERIAL, LABOR AND EQUIPMENT TO COMPLETE THE WORK AND FURNISH A COMPLETED JOB ALL IN ACCORDANCE WITH LOCAL AND STATE GOVERNING AUTHORITIES AND OTHER AUTHORITIES HAVING LAWFUL JURISDICTION OVER THE WORK.
5. CONTRACTOR SHALL SECURE AND PAY FOR ALL PERMITS AND ALL INSPECTIONS REQUIRED AND SHALL ALSO PAY FEES REQUIRED FOR THE GENERAL CONSTRUCTION, PLUMBING, ELECTRICAL AND HVAC. PERMITS SHALL BE PAID FOR BY THE RESPECTIVE SUBCONTRACTORS.
6. CONTRACTOR SHALL MAINTAIN A CURRENT SET OF DRAWINGS AND SPECIFICATIONS ON SITE AT ALL TIMES AND INSURE DISTRIBUTION OF NEW DRAWINGS TO SUBCONTRACTORS AND OTHER RELEVANT PARTIES AS SOON AS THEY ARE MADE AVAILABLE. ALL OLD DRAWINGS SHALL BE MARKED VOID AND REMOVED FROM THE CONTRACT AREA. THE CONTRACTOR SHALL FURNISH AN "AS-BUILT" SET OF DRAWINGS TO OWNER UPON COMPLETION OF PROJECT.
7. LOCATION OF EQUIPMENT AND WORK SUPPLIED BY OTHERS THAT IS DIAGRAMMATICALLY INDICATED ON THE DRAWINGS, SHALL BE DETERMINED BY THE CONTRACTOR. THE CONTRACTOR SHALL DETERMINE LOCATIONS AND DIMENSIONS SUBJECT TO STRUCTURAL CONDITIONS AND WORK OF THE SUBCONTRACTORS.
8. THE CONTRACTOR IS SOLELY RESPONSIBLE TO DETERMINE CONSTRUCTION PROCEDURE AND SEQUENCE, AND TO ENSURE THE SAFETY OF THE EXISTING STRUCTURES AND IT'S COMPONENT PARTS DURING CONSTRUCTION. THIS INCLUDES THE ADDITION OF WHATEVER SHORING, BRACING, UNDERPINNING, ETC. THAT MAY BE NECESSARY.
9. DRAWINGS INDICATE THE MINIMUM STANDARDS, BUT IF ANY WORK SHOULD BE INDICATED TO BE SUBSTANDARD TO ANY ORDINANCES, LAWS, CODES, RULES, OR REGULATIONS BEARING ON THE WORK, THE CONTRACTOR SHALL INCLUDE IN HIS WORK AND SHALL EXECUTE THE WORK CORRECTLY IN ACCORDANCE WITH SUCH ORDINANCES, LAWS, CODES, RULES OR REGULATIONS WITH NO INCREASE IN COSTS.
10. ALL UTILITY WORK SHALL BE IN ACCORDANCE WITH LOCAL UTILITY COMPANY REQUIREMENTS AND SPECIFICATIONS.
11. ALL EQUIPMENT AND PRODUCTS PURCHASED ARE TO BE REVIEWED BY CONTRACTOR AND ALL APPLICABLE SUBCONTRACTORS FOR ANY CONDITION PER MFR.'S RECOMMENDATIONS. CONTRACTOR TO SUPPLY THESE ITEMS AT NO COST TO OWNER OR CONSTRUCTION MANAGER.
12. ANY AND ALL ERRORS, DISCREPANCIES, AND "MISSED" ITEMS, ARE TO BE BROUGHT TO THE ATTENTION OF THE SITE OWNER'S CONSTRUCTION MANAGER DURING THE BIDDING PROCESS BY THE CONTRACTOR. ALL THESE ITEMS ARE TO BE INCLUDED IN THE BID. NO 'EXTRA' WILL BE ALLOWED FOR MISSED ITEMS.
13. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL ON-SITE SAFETY FROM THE TIME THE JOB IS AWARDED UNTIL ALL WORK IS COMPLETE AND ACCEPTED BY THE OWNER.
14. CONTRACTOR TO REVIEW ALL SHOP DRAWINGS AND SUBMIT COPY TO ENGINEER FOR APPROVAL. DRAWINGS MUST BEAR THE CHECKER'S INITIALS BEFORE SUBMITTING TO THE CONSTRUCTION MANAGER FOR REVIEW.
15. THE CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS, ELEVATIONS, ANGLES, AND EXISTING CONDITIONS AT THE SITE, PRIOR TO FABRICATION AND/OR INSTALLATION OF ANY WORK IN THE CONTRACT AREA.
16. COORDINATION, LAYOUT, FURNISHING AND INSTALLATION OF CONDUIT AND ALL APPURTENANCES REQUIRED FOR PROPER INSTALLATION OF ELECTRICAL AND TELECOMMUNICATION SERVICE SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
17. ALL DAMAGE CAUSED TO ANY EXISTING STRUCTURE SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR. THE CONTRACTOR WILL BE HELD LIABLE FOR ALL REPAIRS REQUIRED FOR EXISTING STRUCTURES IF DAMAGED DURING CONSTRUCTION ACTIVITIES.
18. THE CONTRACTOR SHALL CONTACT 'CALL BEFORE YOU DIG' AT LEAST 48 HOURS PRIOR TO ANY EXCAVATIONS AT 1-800-922-4455. ALL UTILITIES SHALL BE IDENTIFIED AND CLEARLY MARKED. CONTRACTOR SHALL MAINTAIN AND PROTECT MARKED UTILITIES THROUGHOUT PROJECT COMPLETION.
18. CONTRACTOR SHALL COMPLY WITH OWNER'S ENVIRONMENTAL ENGINEER ON ALL METHODS AND PROVISIONS FOR ALL EXCAVATION ACTIVITIES INCLUDING SOIL DISPOSAL. ALL BACKFILL MATERIALS TO BE PROVIDED BY THE CONTRACTOR.
19. THE COUNTY/CITY/TOWN WILL MAKE PERIODIC FIELD OBSERVATION AND INSPECTIONS TO MONITOR THE INSTALLATION, MATERIALS, WORKMANSHIP AND EQUIPMENT INCORPORATED INTO THE PROJECT TO ENSURE COMPLIANCE WITH THE DESIGN PLANS, SPECIFICATIONS, CONTRACT DOCUMENTS AND APPROVED SHOP DRAWINGS.
20. THE COUNTY/CITY/TOWN MUST BE NOTIFIED (2) WORKING DAYS PRIOR TO CONCEALMENT/BURIAL OF ANY SYSTEM OR MATERIAL THAT WILL PREVENT THE DIRECT INSPECTION OF MATERIALS, METHODS OR WORKMANSHIP. EXAMPLES OF THESE PROCESSES ARE BACKFILLING A GROUND RING OR TOWER FOUNDATION, POURING TOWER FOUNDATIONS, BURYING GROUND RODS, PLATES OR GRIDS, ETC. THE CONTRACTOR MAY PROCEED WITH THE SCHEDULED PROCESS (2) WORKING DAYS AFTER PROVIDING NOTICE UNLESS NOTIFIED OTHERWISE BY THE COUNTY/CITY/TOWN.


	  	<p>CEN TEK engineering <i>Centered on solutions™</i></p> <p>(203) 488-6587 (203) 488-6587 Fax 63-2 North Branford Road Branford, CT 06405 www.CenTekEng.com</p>					
<p>T-MOBILE NORTHEAST LLC</p> <p>SPRINT ID: CT33XC004</p> <p>SITE ID: CTHA826A</p> <p>9 SOUTH ROAD</p> <p>STAFFORD SPRINGS, CT 06077</p>	<p>DATE: 05/28/21</p> <p>SCALE: AS NOTED</p> <p>JOB NO. 21005.31</p>	<p>GENERAL NOTES AND SPECIFICATIONS</p> <p style="font-size: 2em;">N-1</p> <p>Sheet No. <u>2</u> of <u>10</u></p>					

<p>CEN TEK engineering <i>Centered on solutions™</i></p> <p>(203) 488-6587 (203) 488-6587 Fax 63-2 North Branford Road Branford, CT 06405 www.CenTekEng.com</p>	<p>T-MOBILE NORTHEAST LLC</p> <p>SPRINT ID: CT33XC004</p> <p>SITE ID: CTHA826A</p> <p>9 SOUTH ROAD</p> <p>STAFFORD SPRINGS, CT 06077</p>						
<p>DATE: 05/28/21</p> <p>SCALE: AS NOTED</p> <p>JOB NO. 21005.31</p>	<p>GENERAL NOTES AND SPECIFICATIONS</p> <p style="font-size: 2em;">N-1</p> <p>Sheet No. <u>2</u> of <u>10</u></p>						

NOTE:
ALL HCS LENGTHS TO BE MEASURED AND
VERIFIED IN FIELD BEFORE ORDERING

ANTENNA SCHEDULE



SECTOR	EXISTING/PROPOSED	ANTENNA	SIZE (INCHES) (L x W x D)	ANTENNA ϕ HEIGHT	AZIMUTH	(E/P) RRU (QTY)	(E/P) TMA/DIPEXER (QTY)	(QTY) PROPOSED HCS (LENGTH)
A1	PROPOSED	ERICSSON (AIR6449 B41)	33.1 x 20.6 x 8.6	180'	0°			(1) 6x24 HYBRID CABLE (260')
A2	PROPOSED	RFS (APXVAARR24_43-U_NA20)	95.9 x 24 x 8.7	180'	0°	(P) RRU 4480 B71+B85 (1)		
A3	PROPOSED	COMMSCOPE WV-65A-R1	54.7 x 12.08 x 4.6	180'	0°	(P) RRU 4460 B25+B66 (1)		
B1	PROPOSED	ERICSSON (AIR6449 B41)	33.1 x 20.6 x 8.6	180'	120°			(1) 6x24 HYBRID CABLE (260')
B2	PROPOSED	RFS (APXVAARR24_43-U_NA20)	95.9 x 24 x 8.7	180'	120°	(P) RRU 4480 B71+B85 (1)		
B3	PROPOSED	COMMSCOPE WV-65A-R1	54.7 x 12.08 x 4.6	180'	120°	(P) RRU 4460 B25+B66 (1)		
C1	PROPOSED	ERICSSON (AIR6449 B41)	33.1 x 20.6 x 8.6	180'	240°			(1) 6x12 HYBRID CABLE (260')
C2	PROPOSED	RFS (APXVAARR24_43-U_NA20)	95.9 x 24 x 8.7	180'	240°	(P) RRU 4480 B71+B85 (1)		
C3	PROPOSED	COMMSCOPE WV-65A-R1	54.7 x 12.08 x 4.6	180'	240°	(P) RRU 4460 B25+B66 (1)		

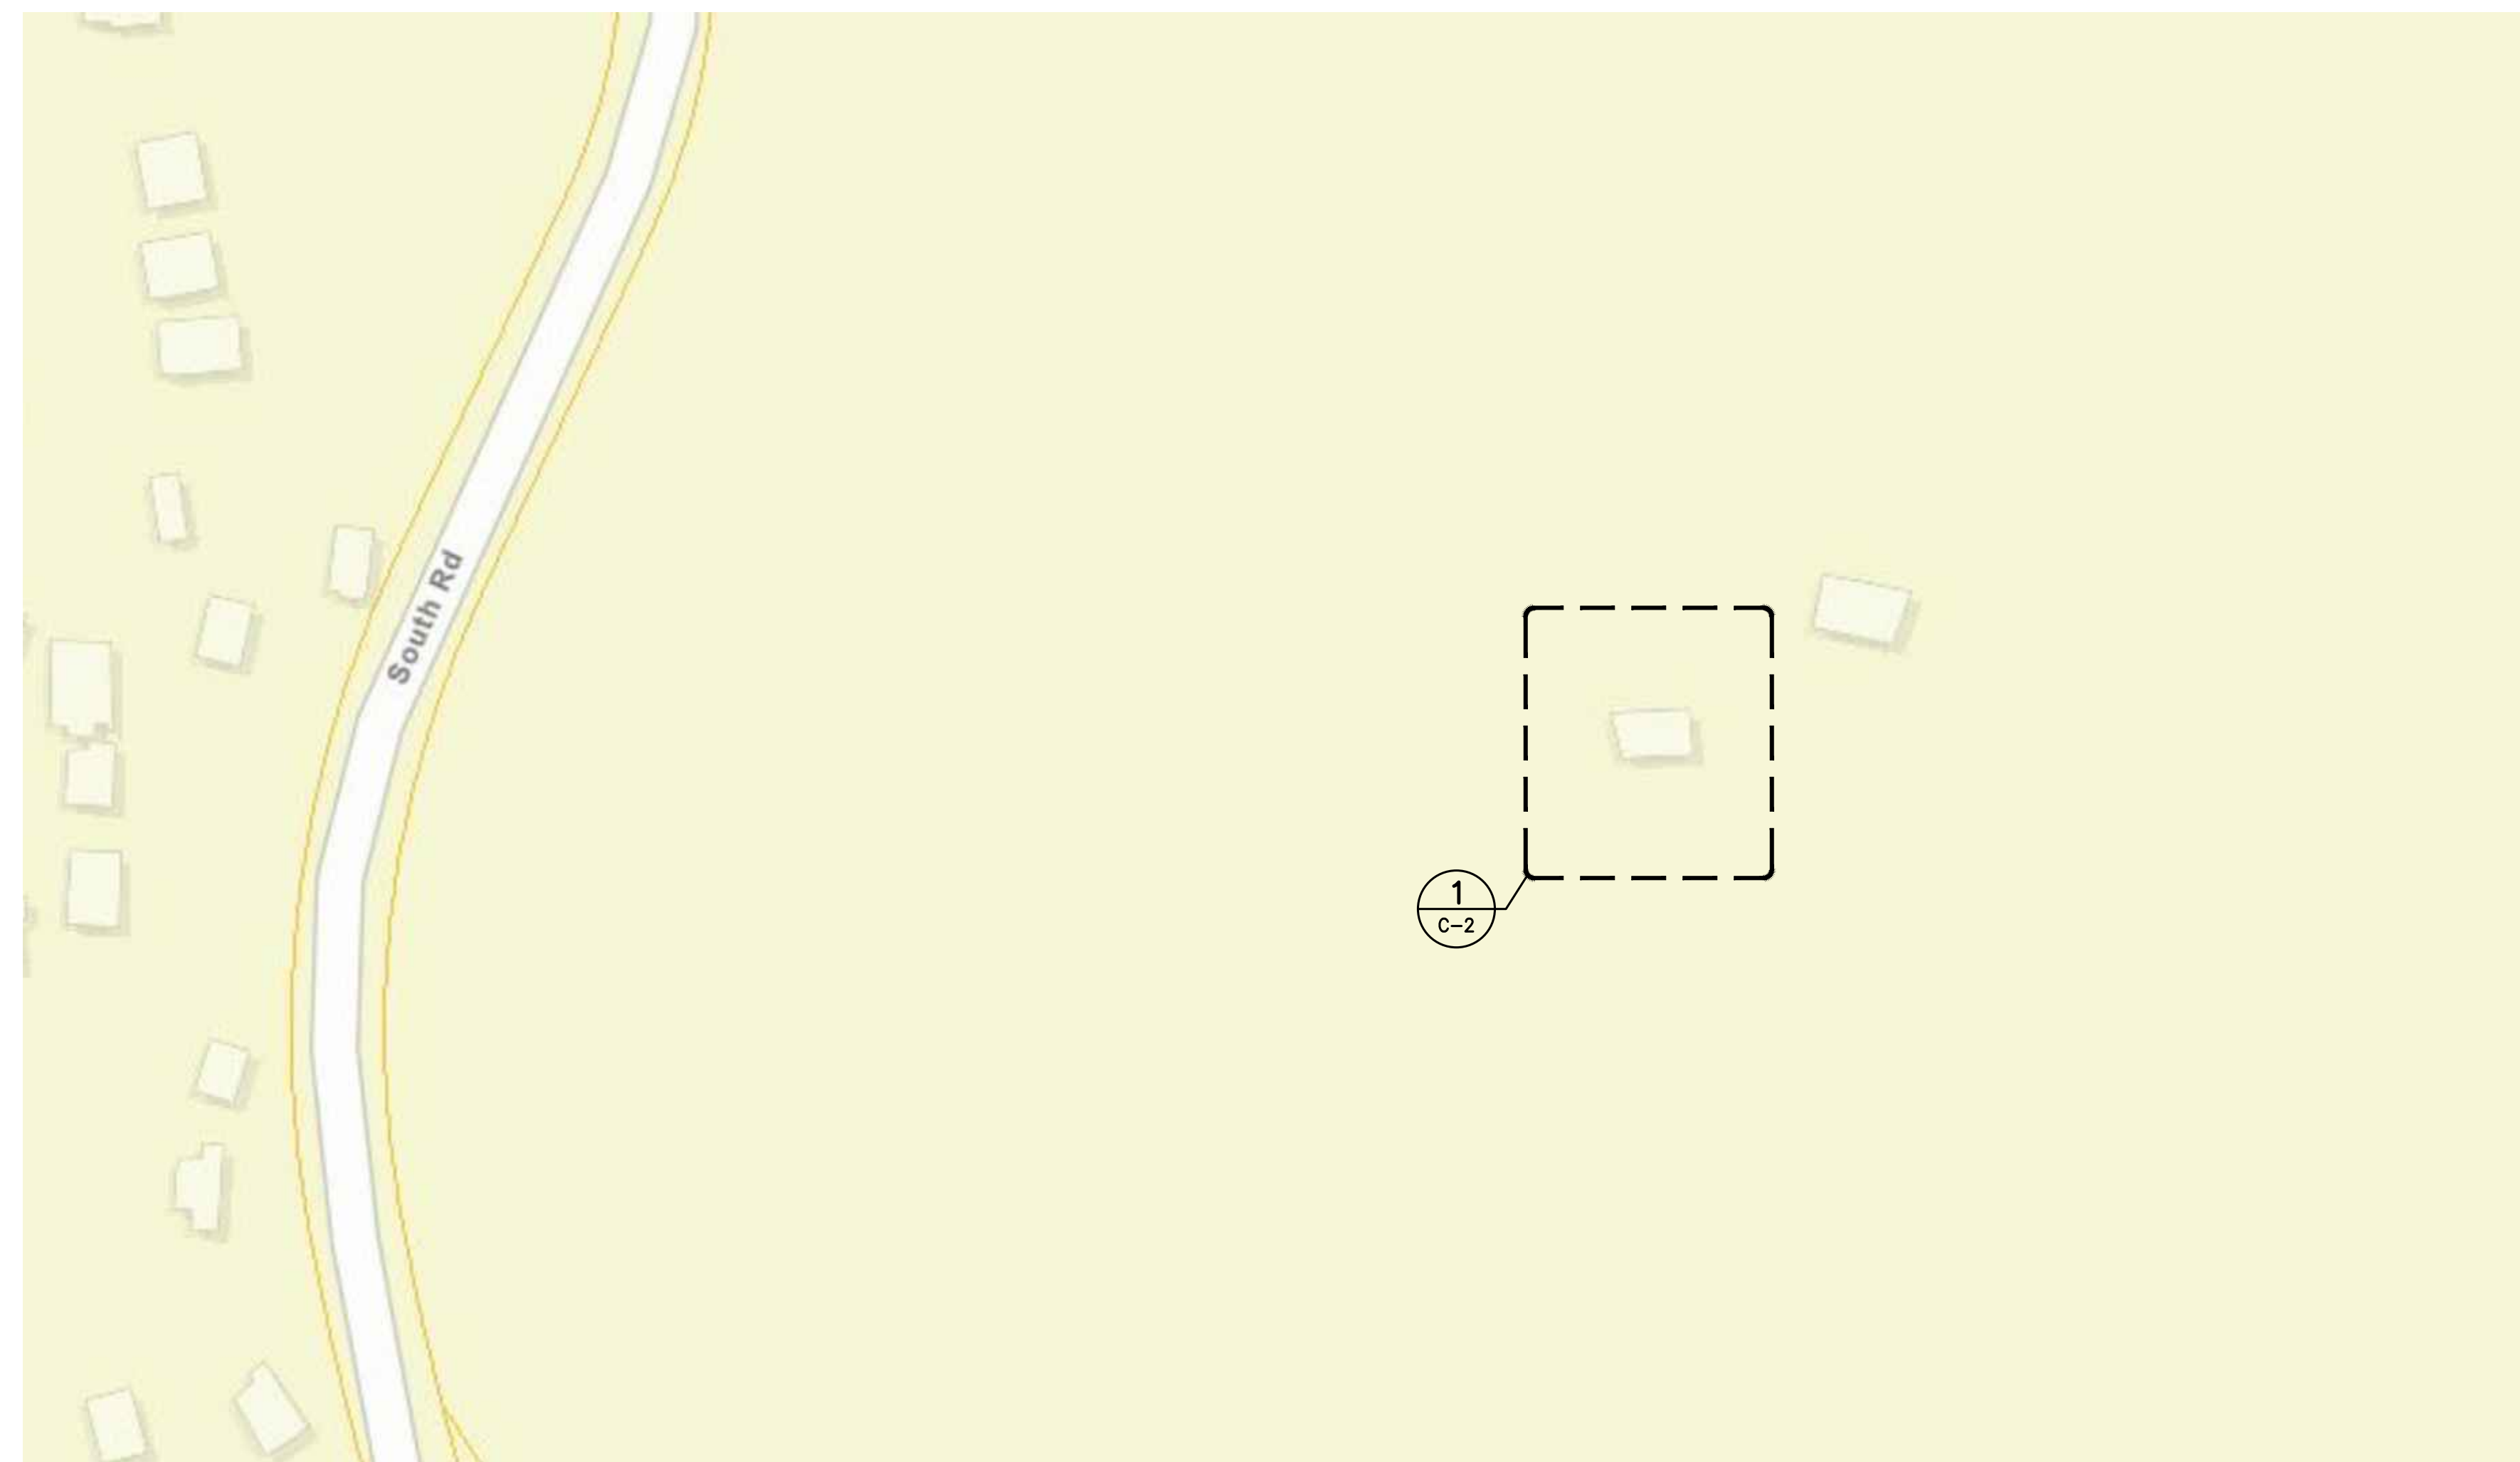

1 SITE LOCATION PLAN
C-1 SCALE: NOT TO SCALE



PROFESSIONAL ENGINEER SEAL

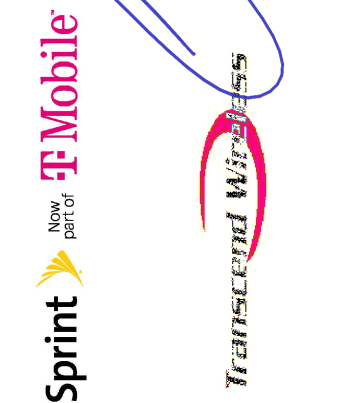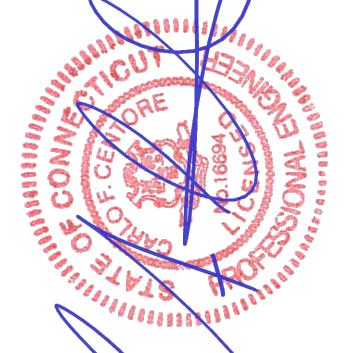

CENTEK engineering
Centered on solutions™
(203) 488-0580
(203) 488-6587 Fax
63-2 North Branford Road
Branford, CT 06405
www.CentekEng.com

T-MOBILE NORTHEAST LLC
SPRINT ID: CT33XC004
SITE ID: CTHA826A
9 SOUTH ROAD
STAFFORD SPRINGS, CT 06077


DATE: 05/28/21
SCALE: AS NOTED
JOB NO. 21005.31

SITE LOCATION PLAN


C-1

Sheet No. 3 of 10

REV.	DATE	BY	CHK'D BY	DESCRIPTION
2	12/20/21	RTS	TUR	CONSTRUCTION DRAWINGS - REVISED PER UPDATED SA
1	10/12/21	RTS	TUR	CONSTRUCTION DRAWINGS - REVISED PER NEW RFD'S
0	06/24/21	RTS	TUR	CONSTRUCTION DRAWINGS - ISSUED FOR CONSTRUCTION

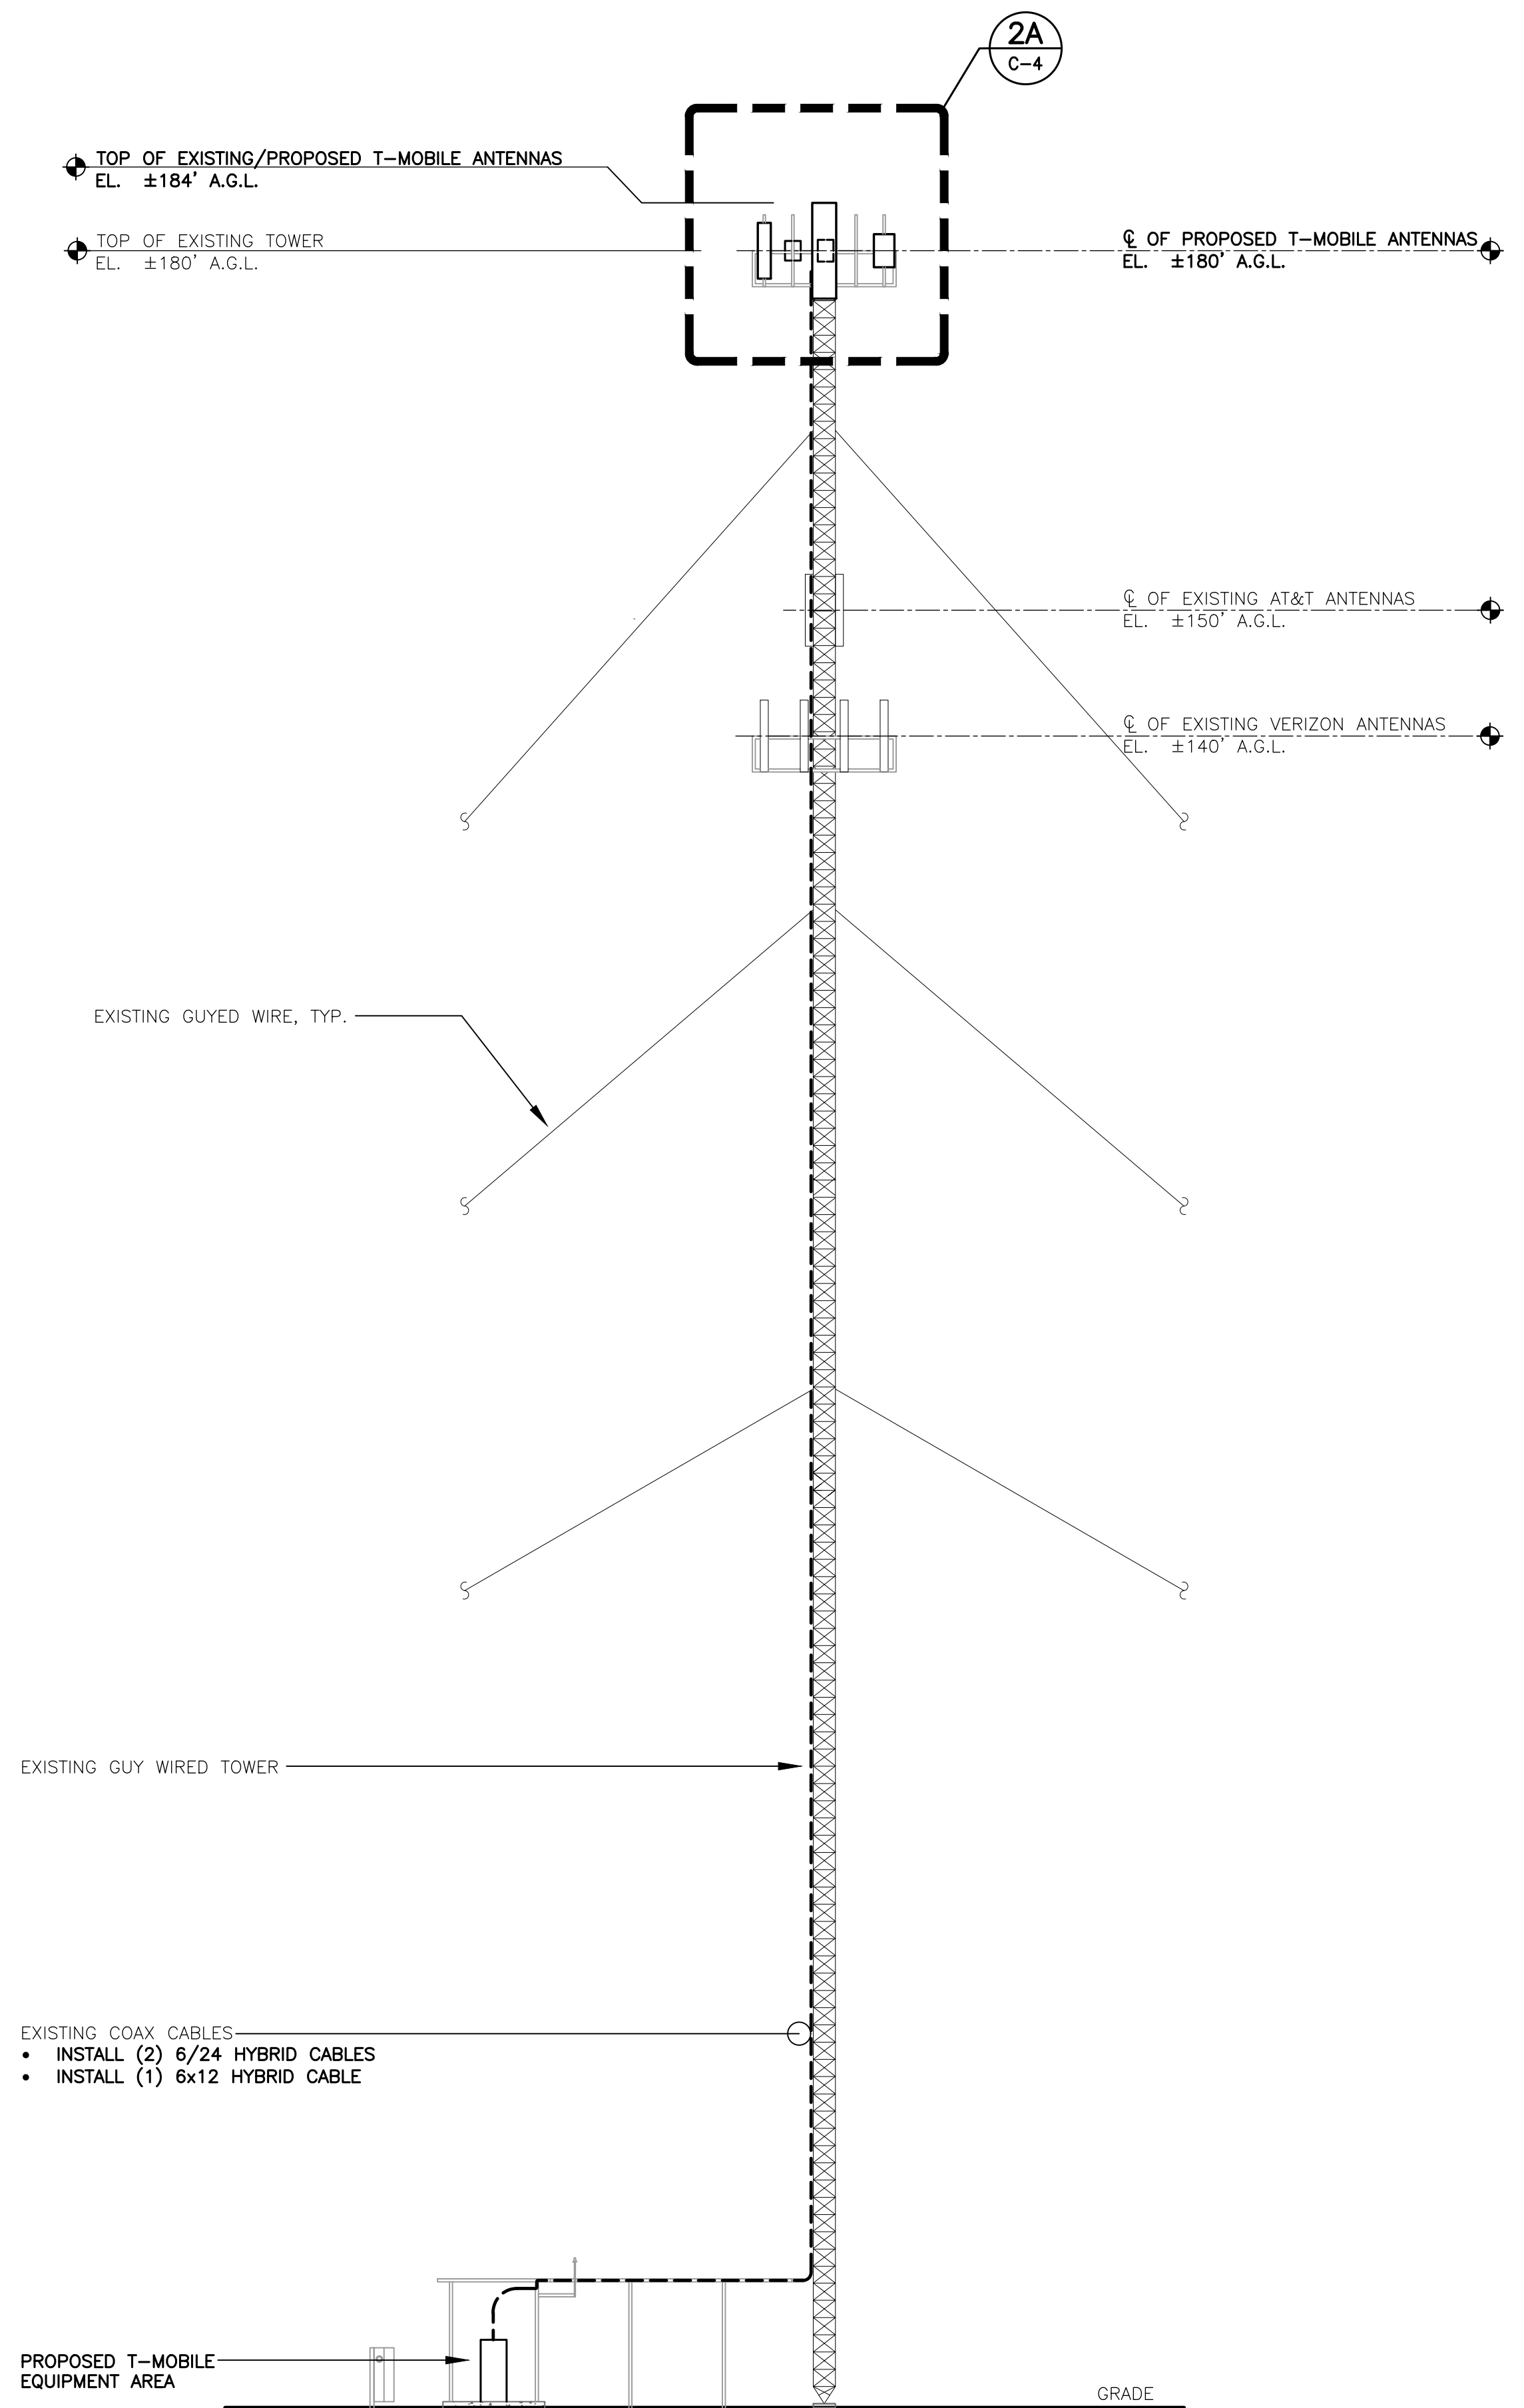

2 PROPOSED ELEVATION
 C-2 SCALE: 3/32" = 1'-0"

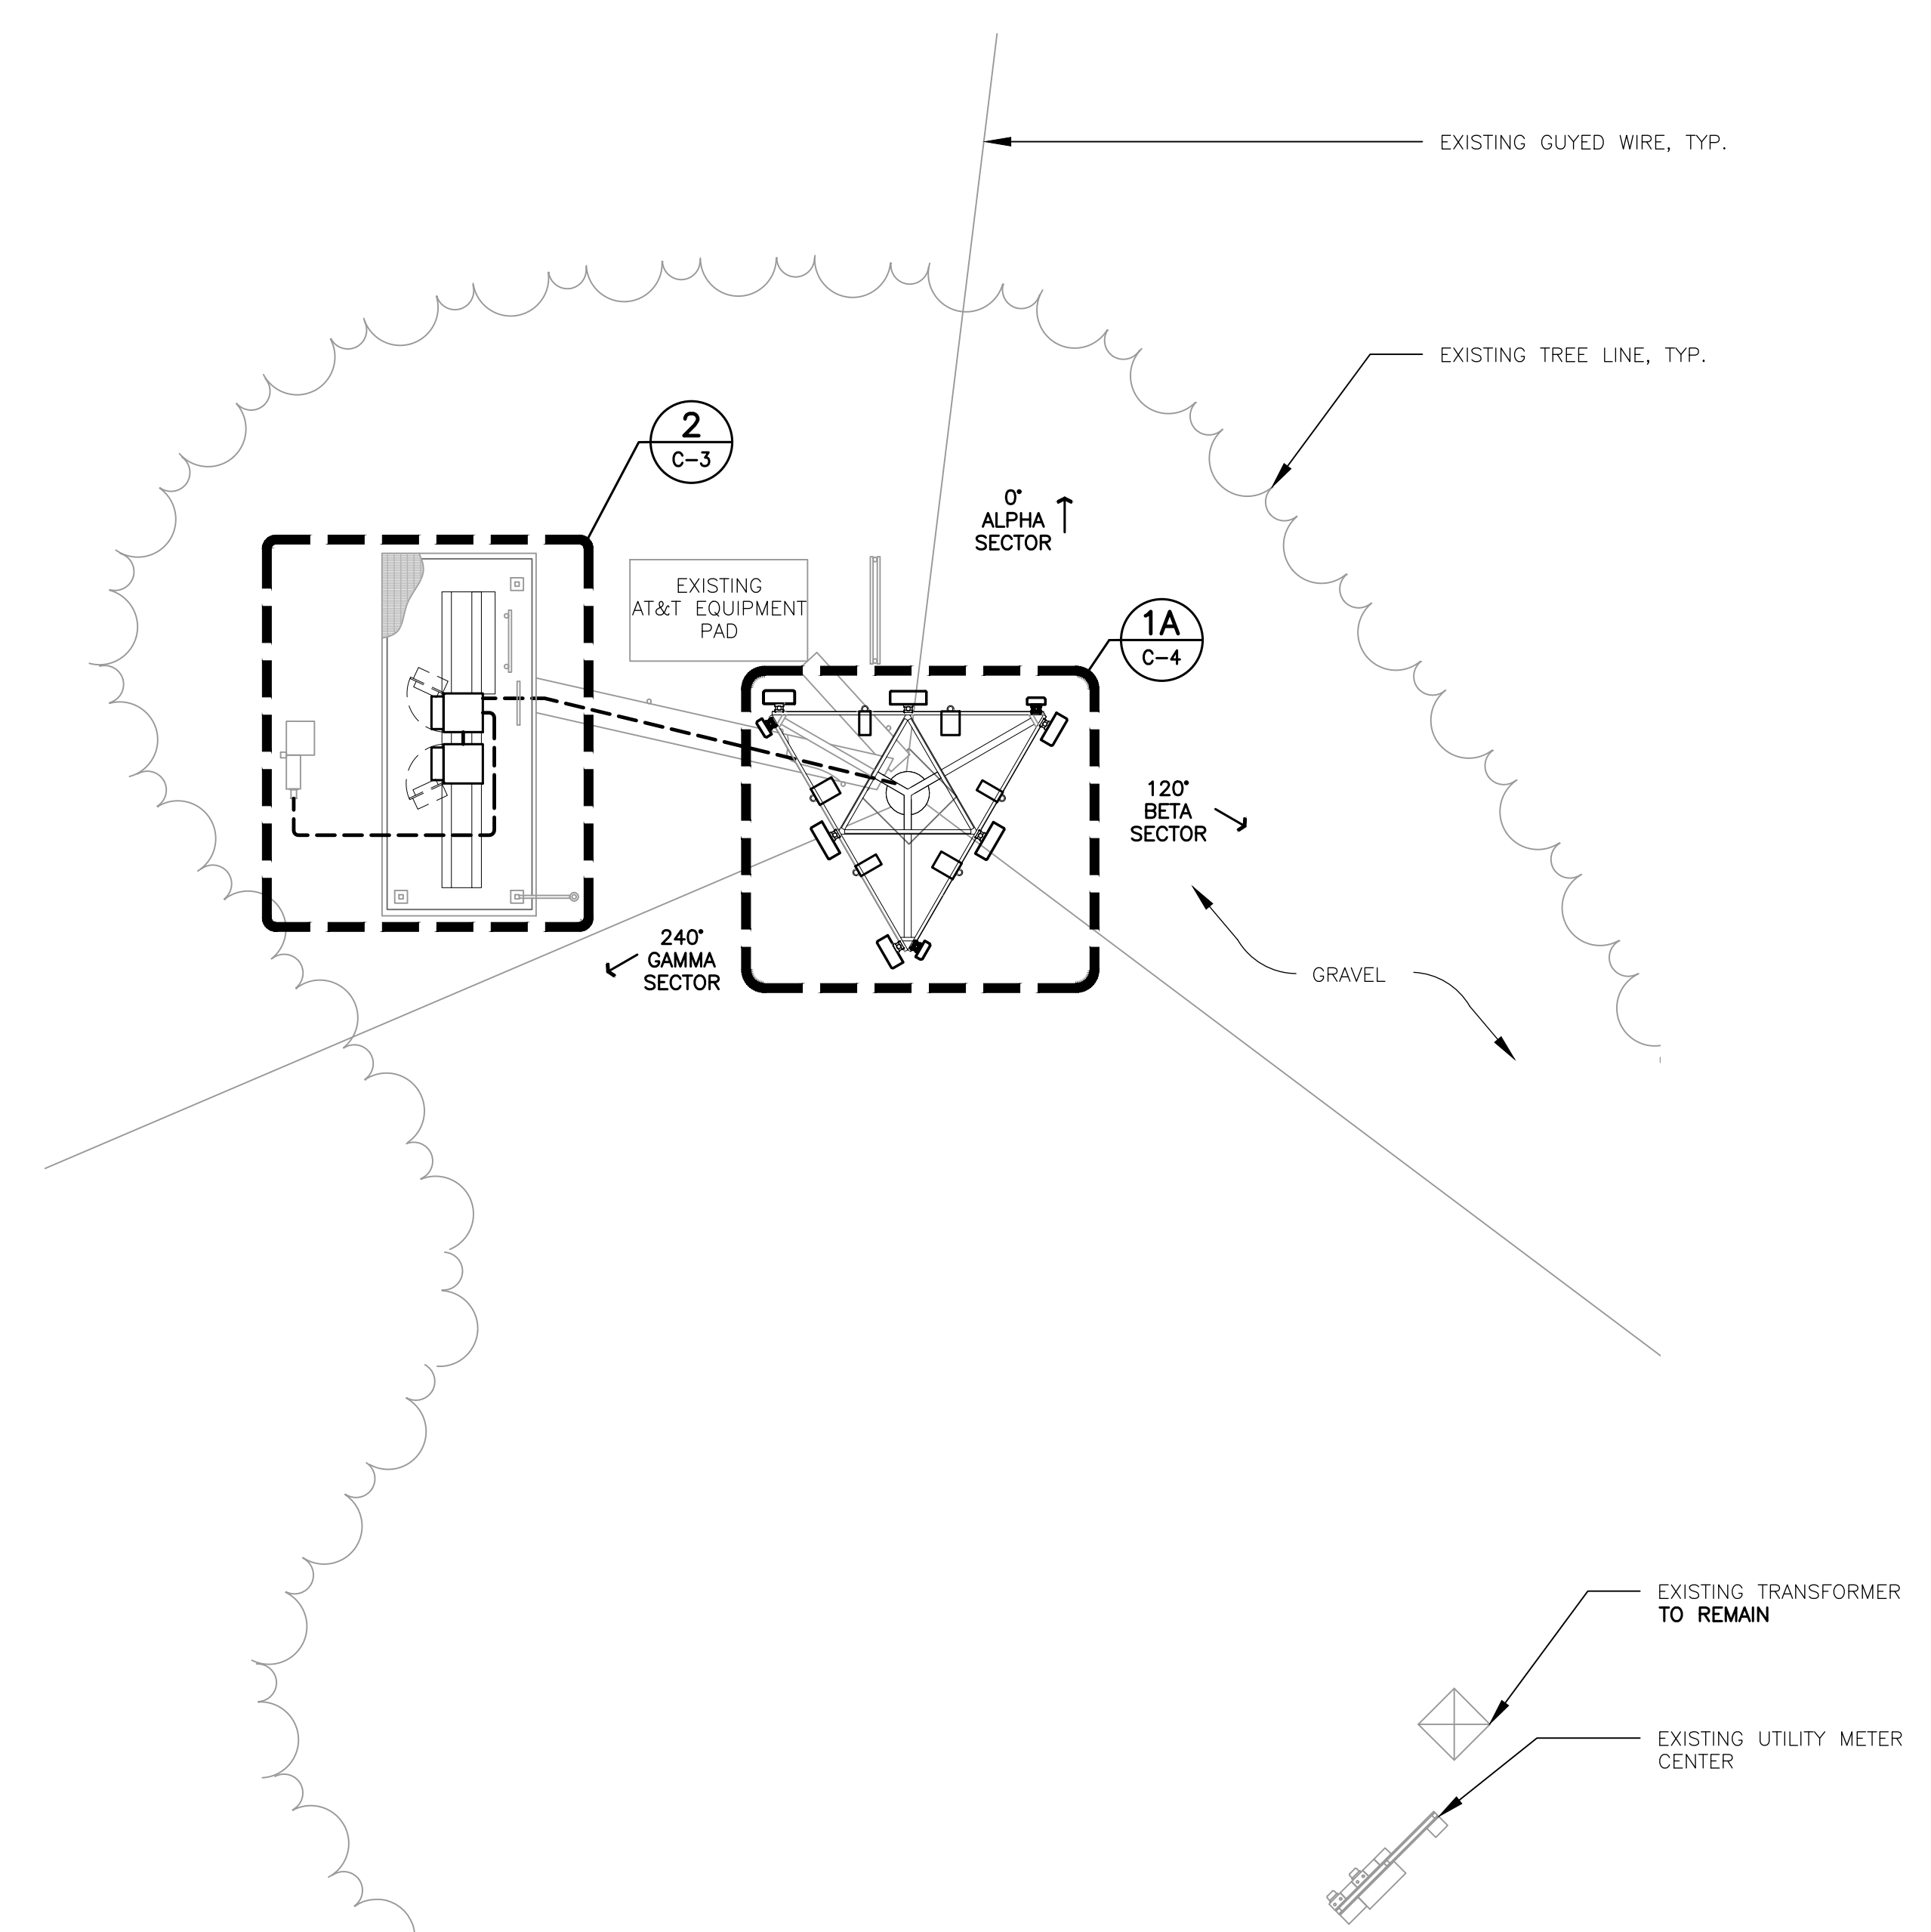

1 PROPOSED COMPOUND PLAN
 C-2 SCALE: 1/8" = 1'-0"

STRUCTURAL COMPLIANCE

ANTENNA MOUNTS

A STRUCTURAL ANALYSIS OF THE ANTENNA MOUNTS WAS PERFORMED FOR THE PROPOSED EQUIPMENT INSTALLATION AND THEY WERE FOUND TO BE STRUCTURALLY SUFFICIENT TO ACCOMMODATE THE PROPOSED LOADING..

REFER TO THE ANTENNA MOUNT ANALYSIS REPORT PREPARED BY CENTEK ENGINEERING (PROJECT # 21005.31) DATED 10/12/21 FOR ADDITIONAL INFORMATION AND REQUIREMENTS.

TOWER AND TOWER FOUNDATION


A STRUCTURAL OPINION LETTER OF THE TOWER AND TOWER FOUNDATION WAS PERFORMED FOR THE PROPOSED EQUIPMENT INSTALLATION AND THEY WERE FOUND TO BE STRUCTURALLY SUFFICIENT TO ACCOMMODATE THE PROPOSED LOADING.

REFER TO THE STRUCTURAL OPINION LETTER PREPARED BY "PAUL J. FORD" (PROJECT # A13321-0014.003.8300) DATED 12/09/21 FOR ADDITIONAL INFORMATION AND REQUIREMENTS.


PREVIOUS STRUCTURAL ANALYSIS PREPARED BY "PAUL J. FORD" (PROJECT # A13321-0014.002.8700) DATED 09/14/21

NOTE: NO EQUIPMENT SHALL BE INSTALLED ON THE HOSTING STRUCTURE WITHOUT A PASSING STRUCTURAL ANALYSIS REPORT AND CONTRACTOR PRIOR CONFIRMATION THAT ANY AND ALL REQUISITE MODIFICATIONS HAVE BEEN COMPLETED.

PROFESSIONAL ENGINEER SEAL	CONSTRUCTION DRAWINGS - REVISED PER UPDATED SA
	CONSTRUCTION DRAWINGS - REVISED PER NEW RFDS
Sprint	CONSTRUCTION DRAWINGS - ISSUED FOR CONSTRUCTION
Transcript Mobile	
CENTEK engineering Centered on solutions™	DRAWN BY: CHK'D BY:
(203) 488-0580 (203) 488-6567 Fax 63-2 North Branford Road Branford, CT 06405 www.CentekEng.com	DATE: 05/28/21
T-MOBILE NORTHEAST LLC	SCALE: AS NOTED
SPRINT ID: CT33XC004	JOB NO. 21005.31
SITE ID: CTHA826A	COMPOUND PLAN & ELEVATION
9 SOUTH ROAD	C-2
STAFFORD SPRINGS, CT 06077	Sheet No. <u>4</u> of <u>10</u>

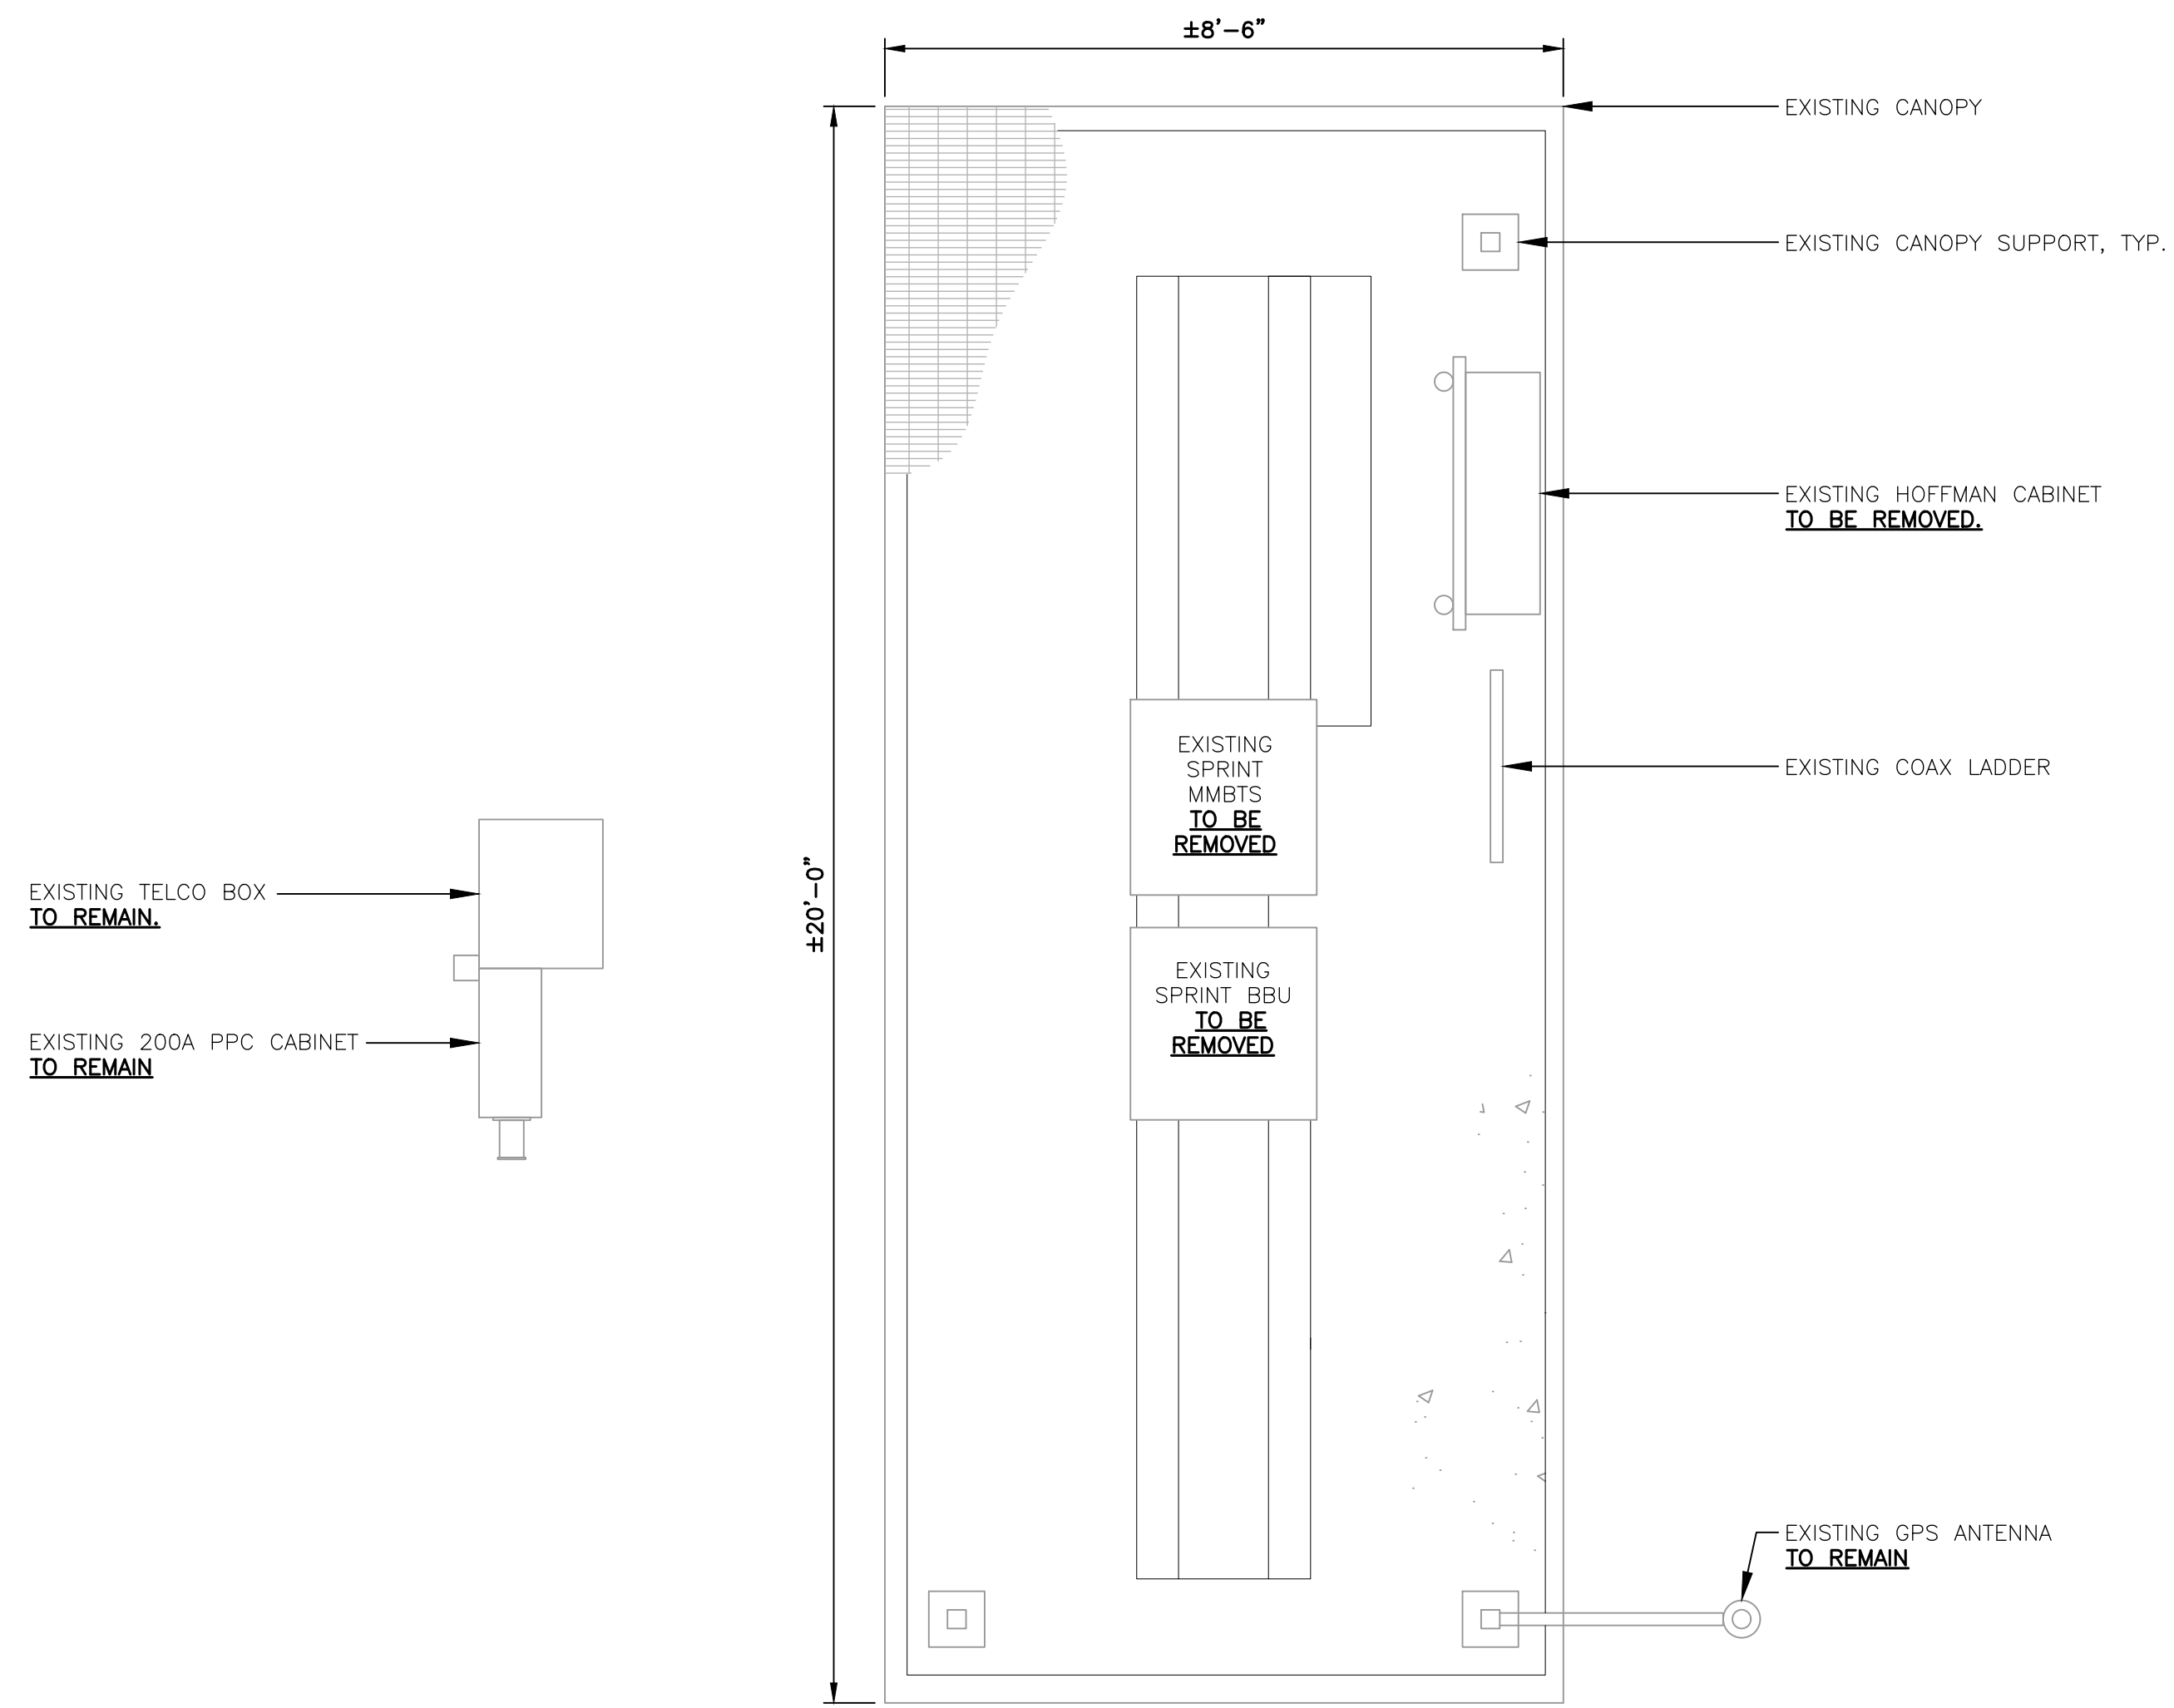


1
C-3 **EXISTING EQUIPMENT PLAN**
SCALE: 1/2" = 1'-0"

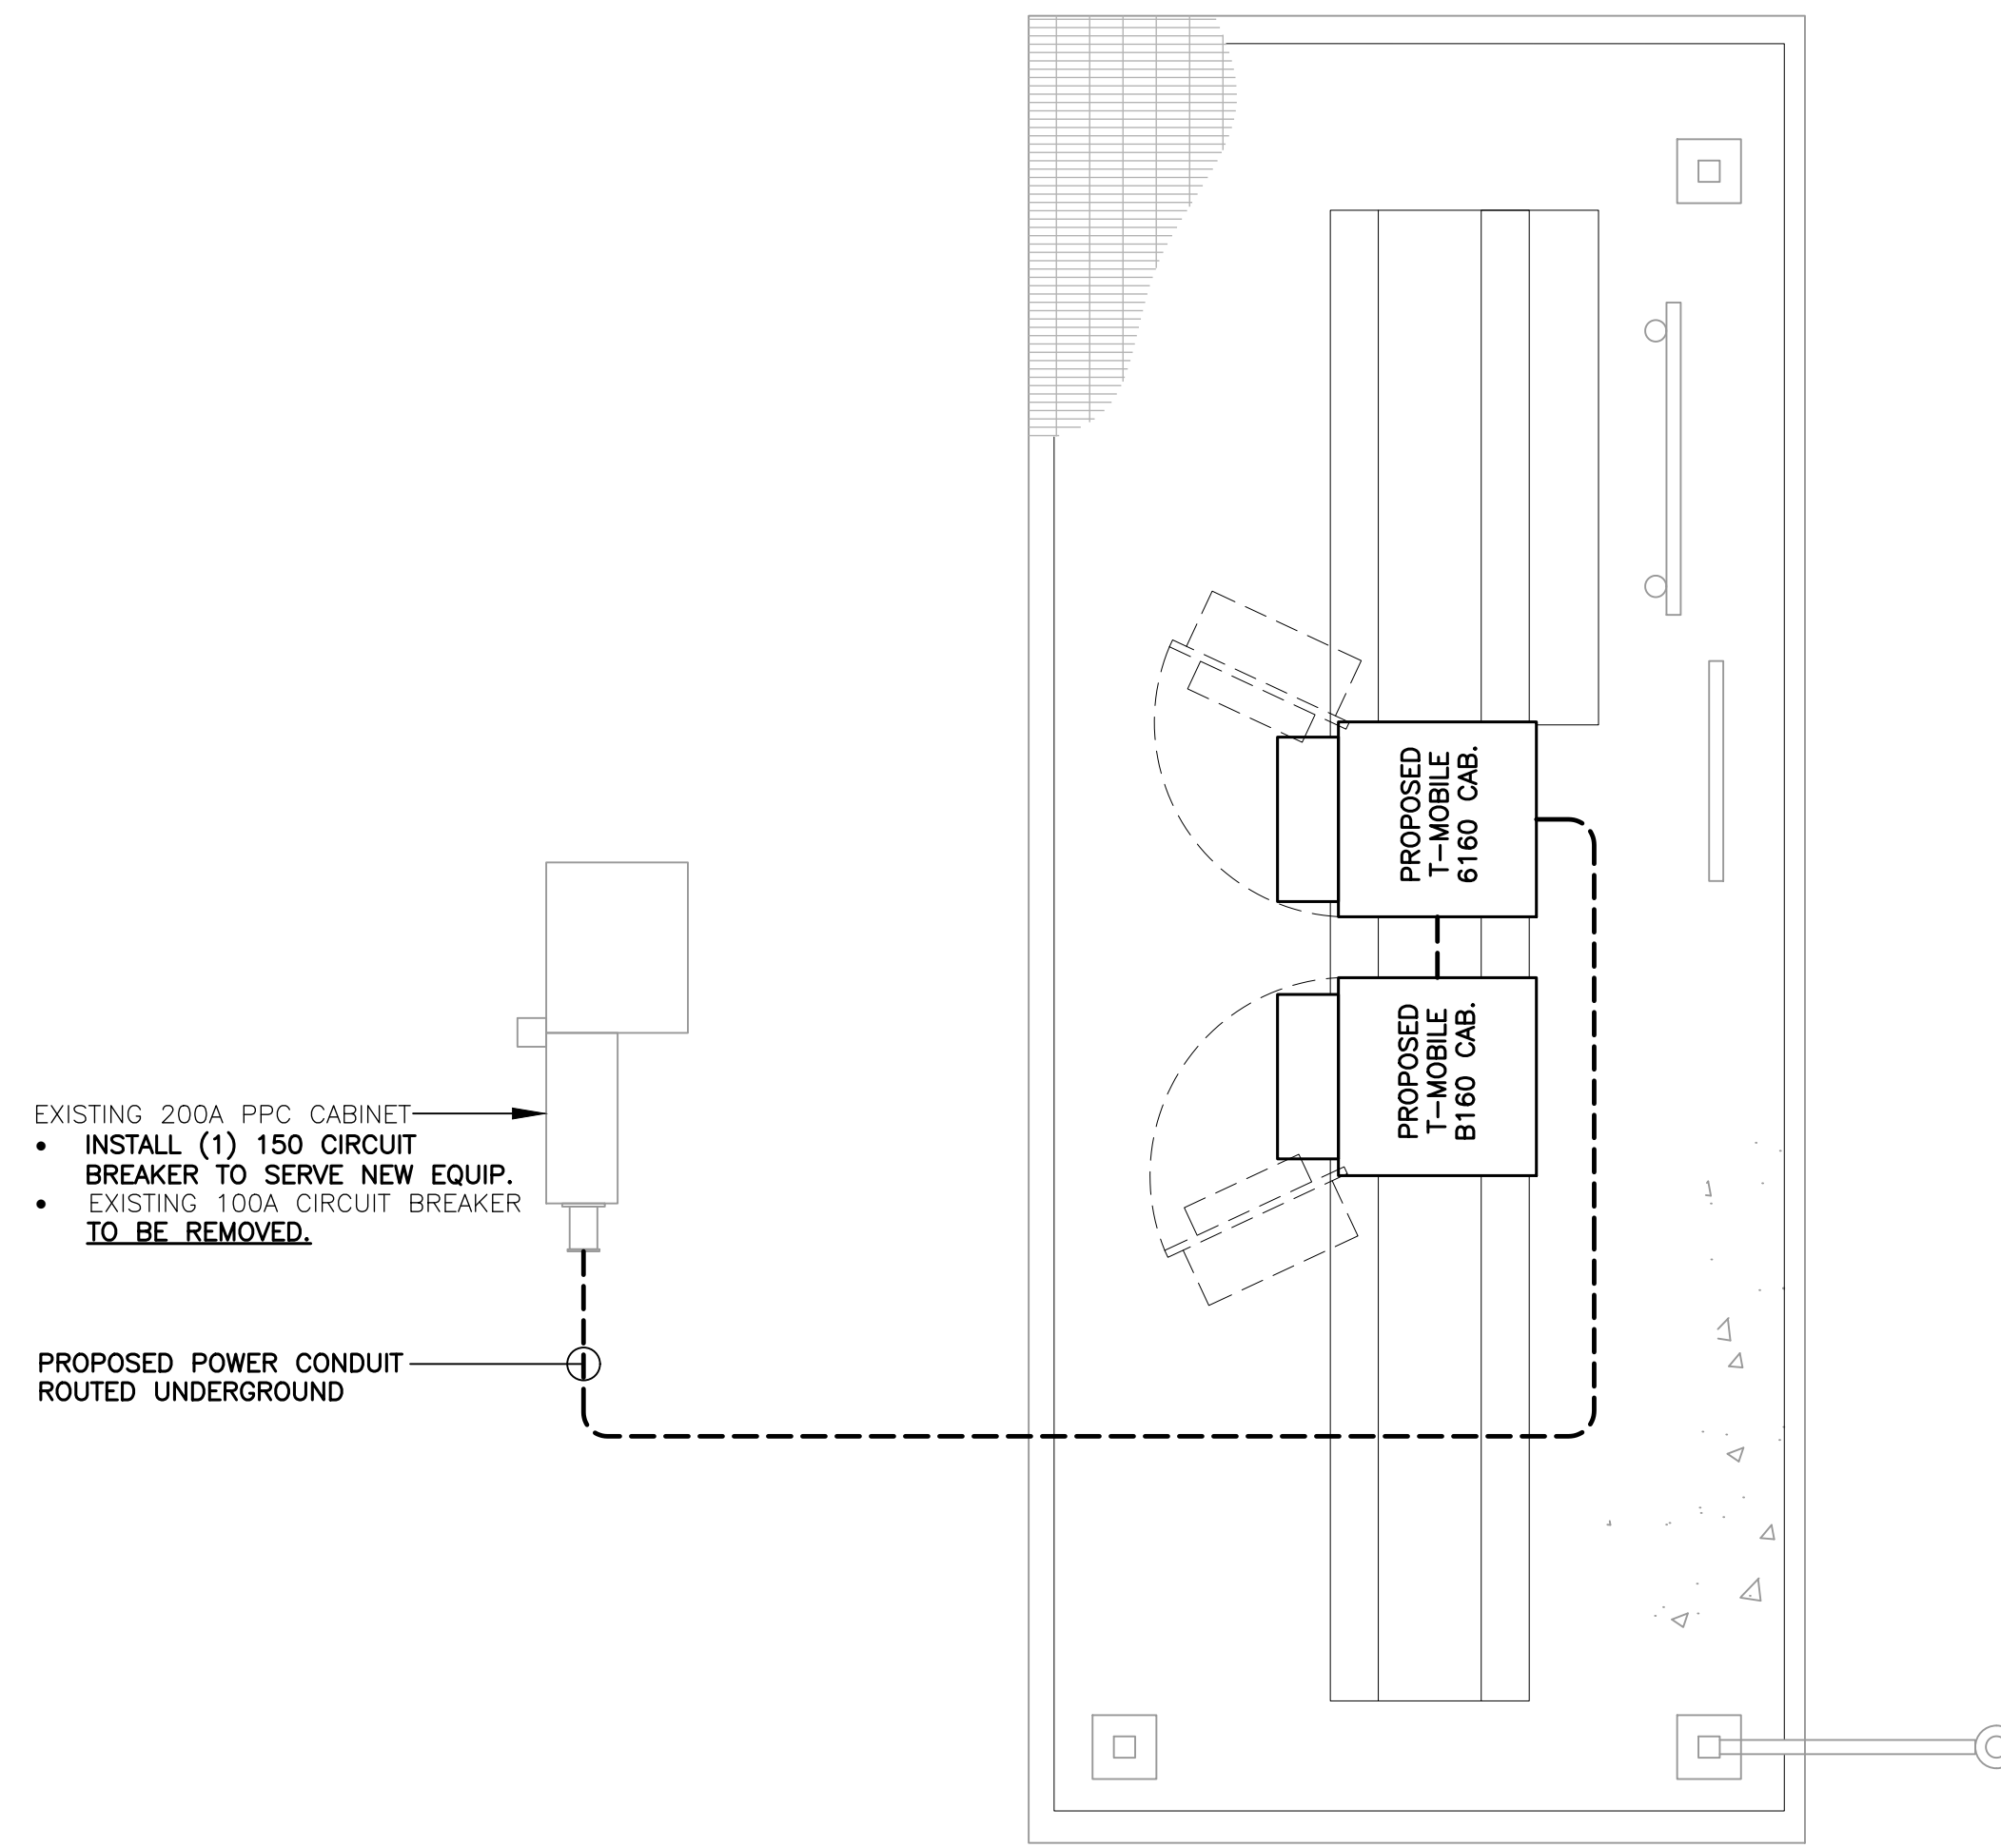


2
C-3 **PROPOSED EQUIPMENT PLAN**
SCALE: 1/2" = 1'-0"


T-MOBILE NORTHEAST LLC SPRINT ID: CT33XC004 SITE ID: CTHA826A 9 SOUTH ROAD STAFFORD SPRINGS, CT 06077		CENTEK engineering <small>Centered on solutions™</small> (203) 488-0580 (203) 488-6587 Fax 63-2 North Branford Road Branford, CT 06405 www.CentekEng.com		PROFESSIONAL ENGINEER SEAL 		CONSTRUCTION DRAWINGS - REVISED PER UPDATED SA CONSTRUCTION DRAWINGS - REVISED PER NEW RFDS CONSTRUCTION DRAWINGS - ISSUED FOR CONSTRUCTION
DATE:	05/28/21	TUR	12/20/21	RTS	TUR	
SCALE:	AS NOTED	TUR	10/12/21	RTS	TUR	
JOB NO.	21005.31	TUR	06/24/21	RTS	TUR	
EQUIPMENT PLANS		REV.	DATE	DRAWN BY	CHK'D BY	DESCRIPTION
C-3 Sheet No. 5 of 10		0				

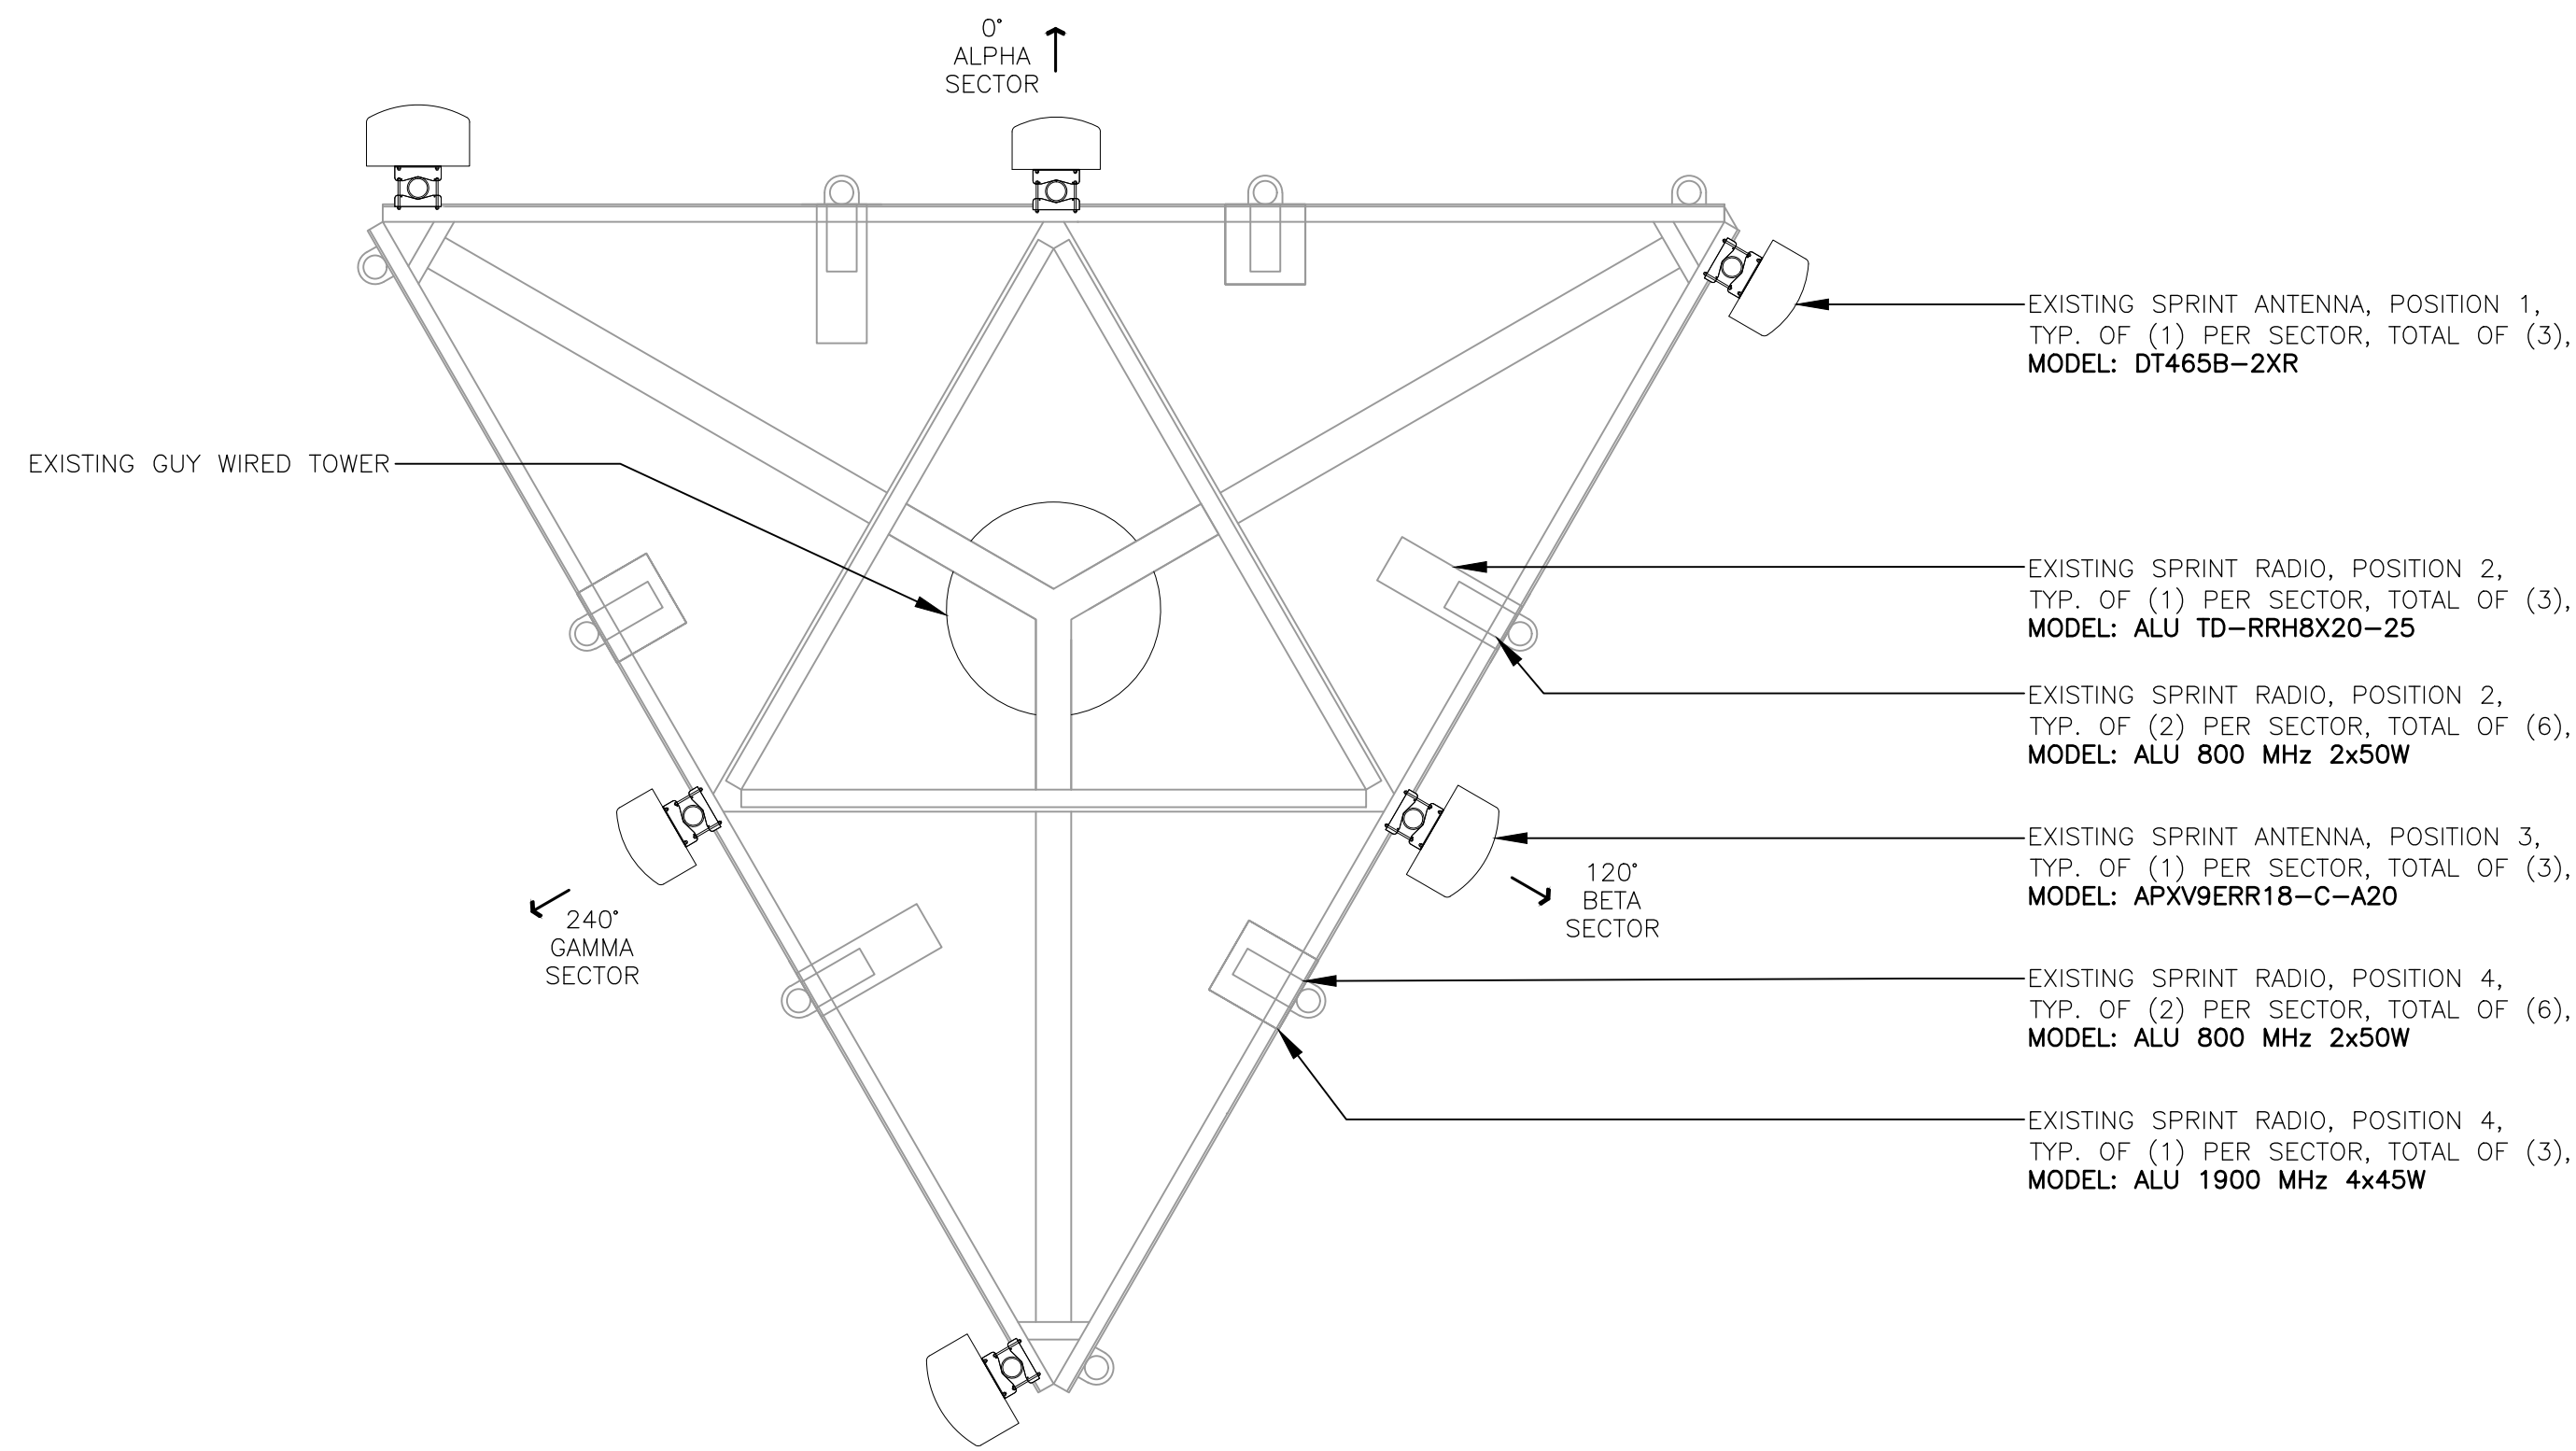


1 EXISTING ANTENNA MOUNTING CONFIGURATION PLAN TRUE NORTH
C-4 SCALE: 1/2" = 1'-0"

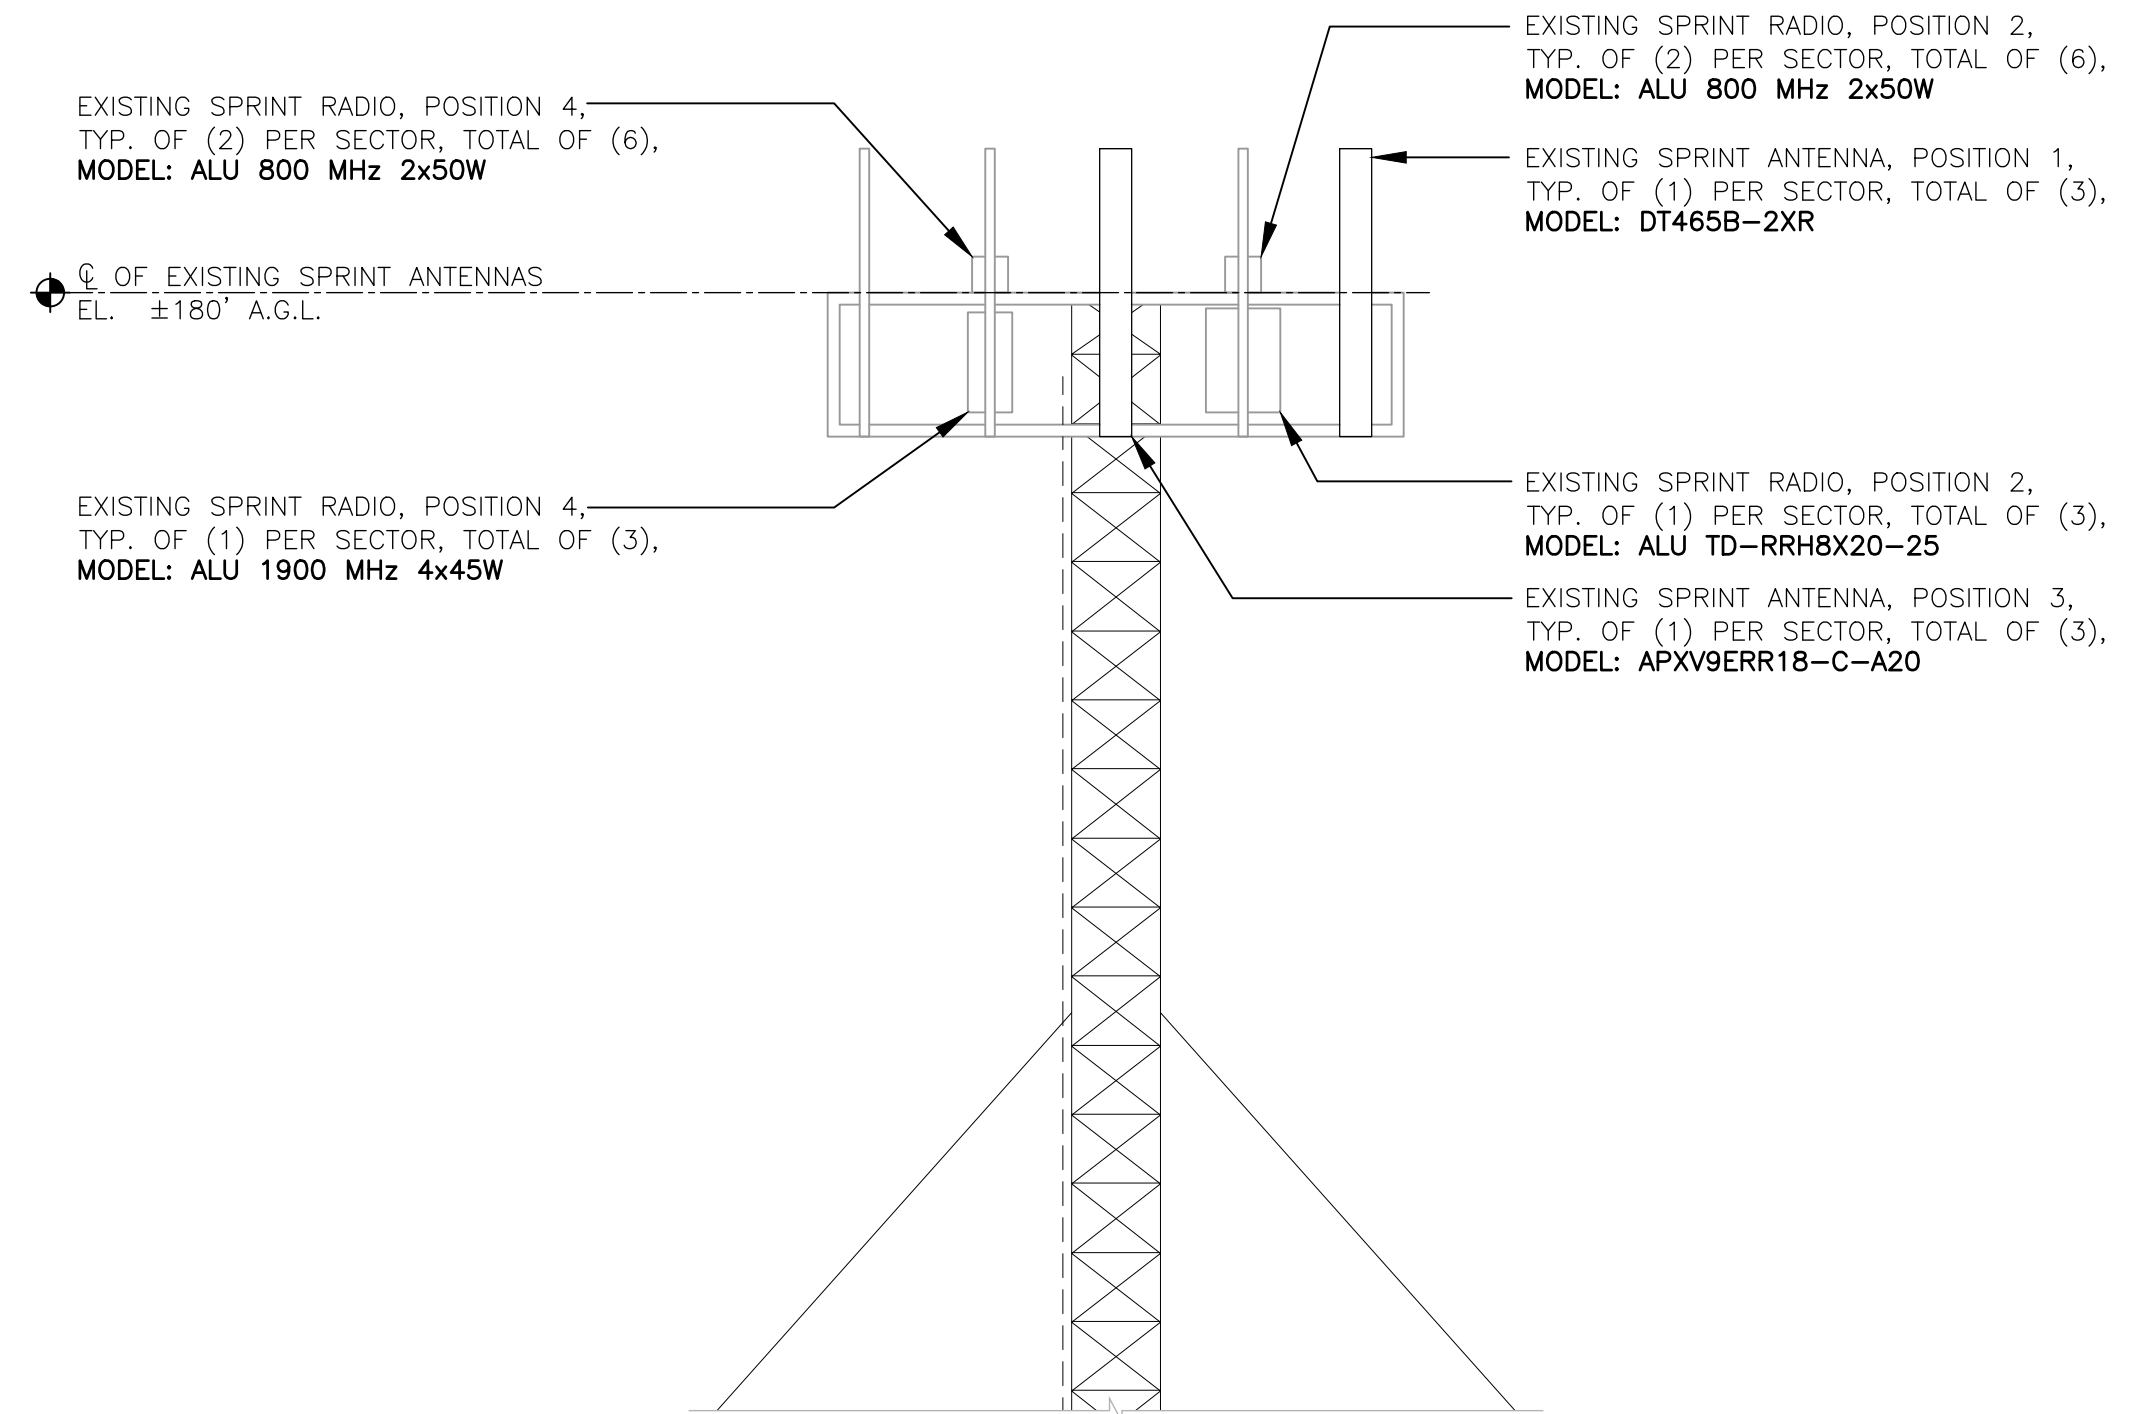

2 EXISTING ANTENNA ELEVATION
C-4 SCALE: 1/4" = 1'-0"

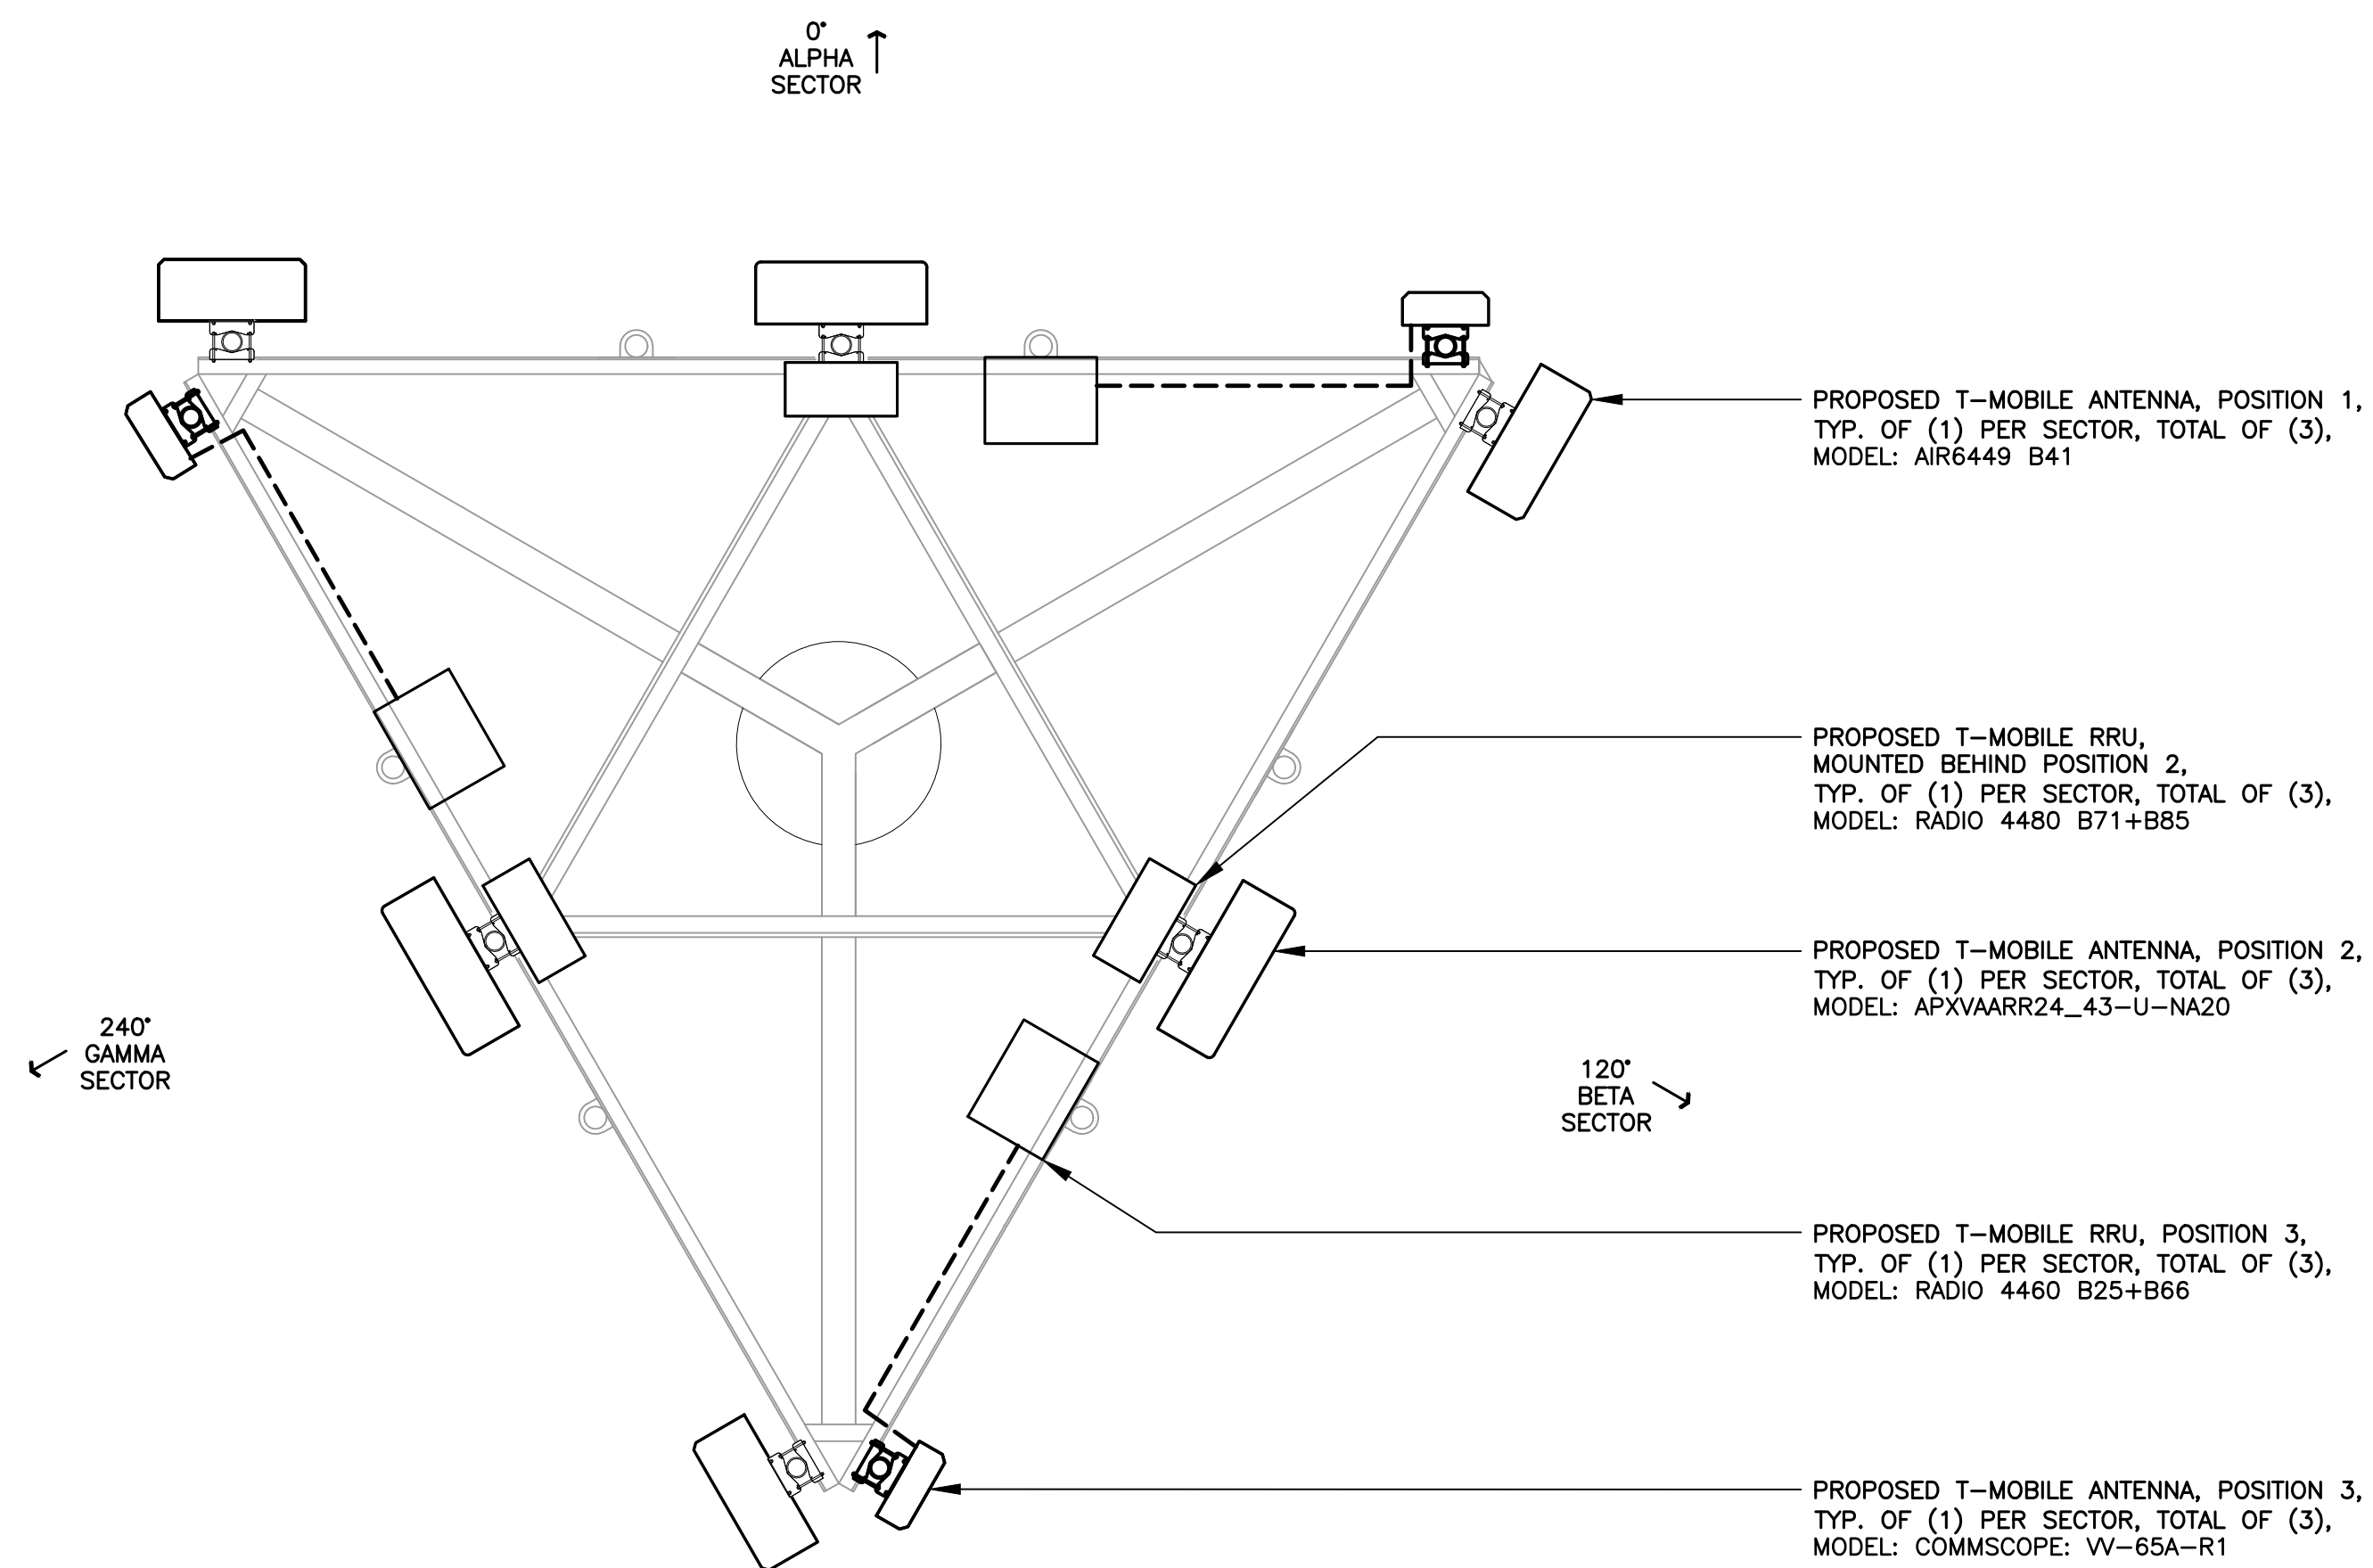


1A PROPOSED ANTENNA MOUNTING CONFIGURATION PLAN TRUE NORTH
C-4 SCALE: 1/2" = 1'-0"

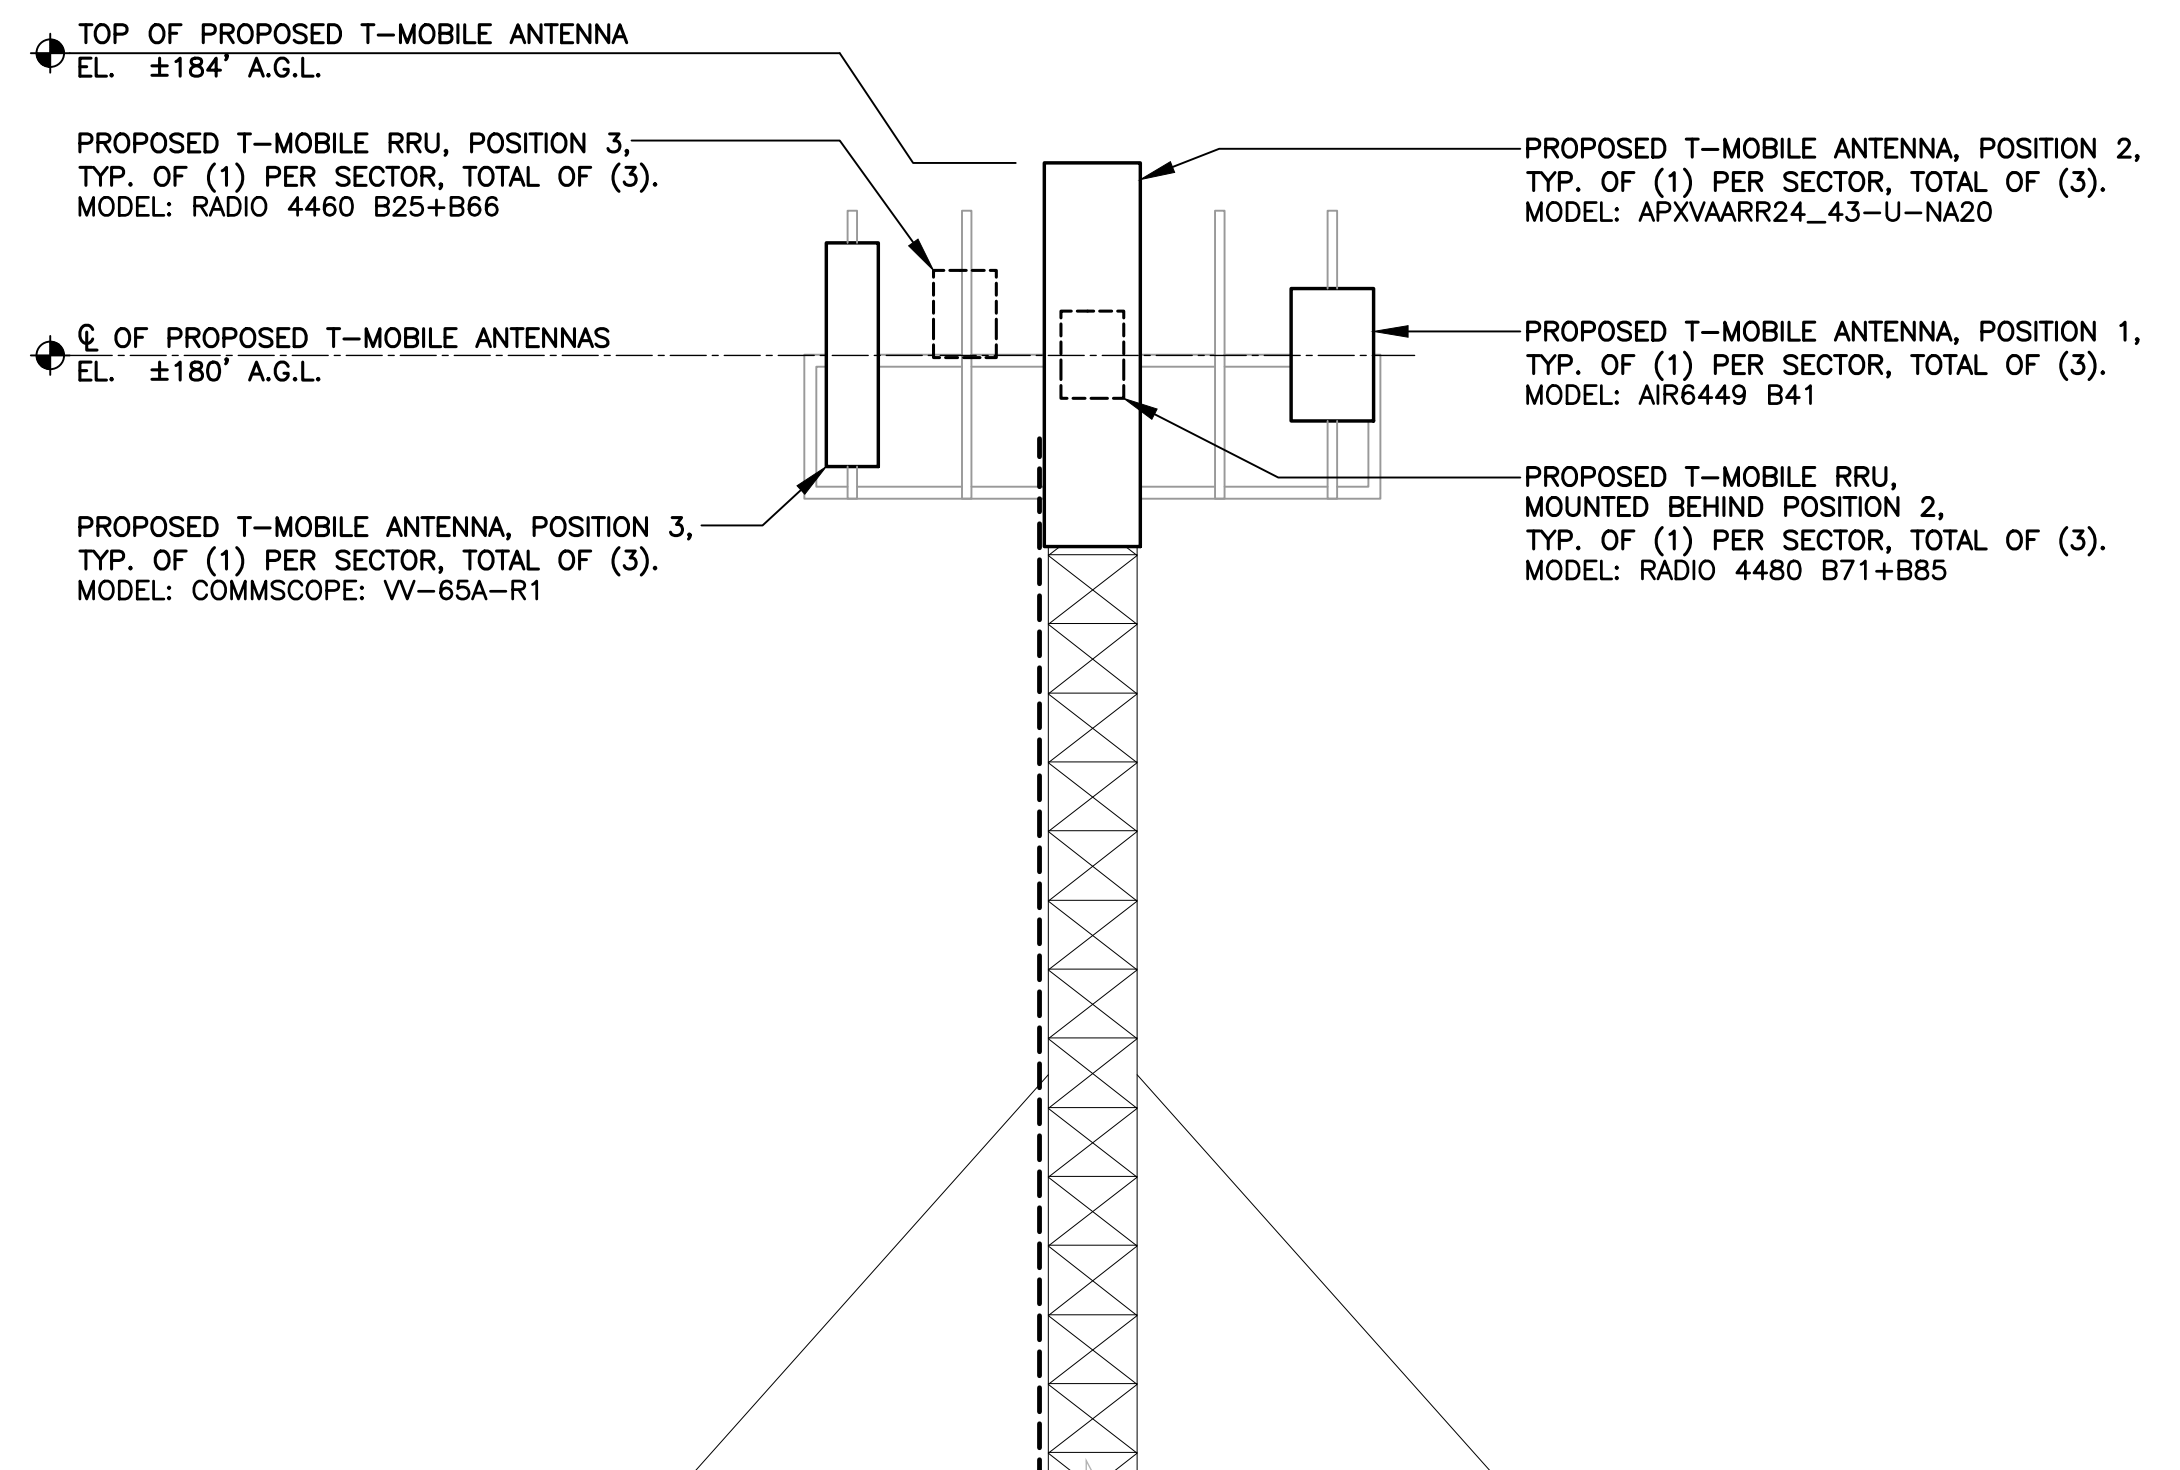

2A PROPOSED ANTENNA ELEVATION
C-4 SCALE: 1/4" = 1'-0"

PROFESSIONAL ENGINEER SEAL

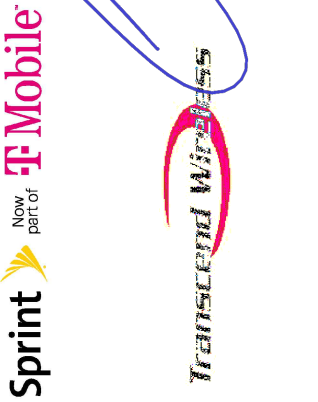

CEN-TEK engineering
Centered on solutions™

(203) 488-0580
(203) 488-6587 Fax
63-2 North Branford Road
Branford, CT 06405
www.CenTekEng.com

T-MOBILE NORTHEAST LLC
SPRINT ID: CT33XC004
SITE ID: CTHA826A
9 SOUTH ROAD
STAFFORD SPRINGS, CT 06077


DATE: 05/28/21
SCALE: AS NOTED
JOB NO. 21005.31

ANTENNA PLANS & ELEVATIONS

C-4

Sheet No. 6 of 10

REV.	DATE	DRAWN BY	CHK'D BY	DESCRIPTION
2	12/20/21	RTS	TUR	CONSTRUCTION DRAWINGS - REVISED PER UPDATED SA
1	10/12/21	RTS	TUR	CONSTRUCTION DRAWINGS - REVISED PER NEW RFDS
0	06/24/21	RTS	TUR	CONSTRUCTION DRAWINGS - ISSUED FOR CONSTRUCTION

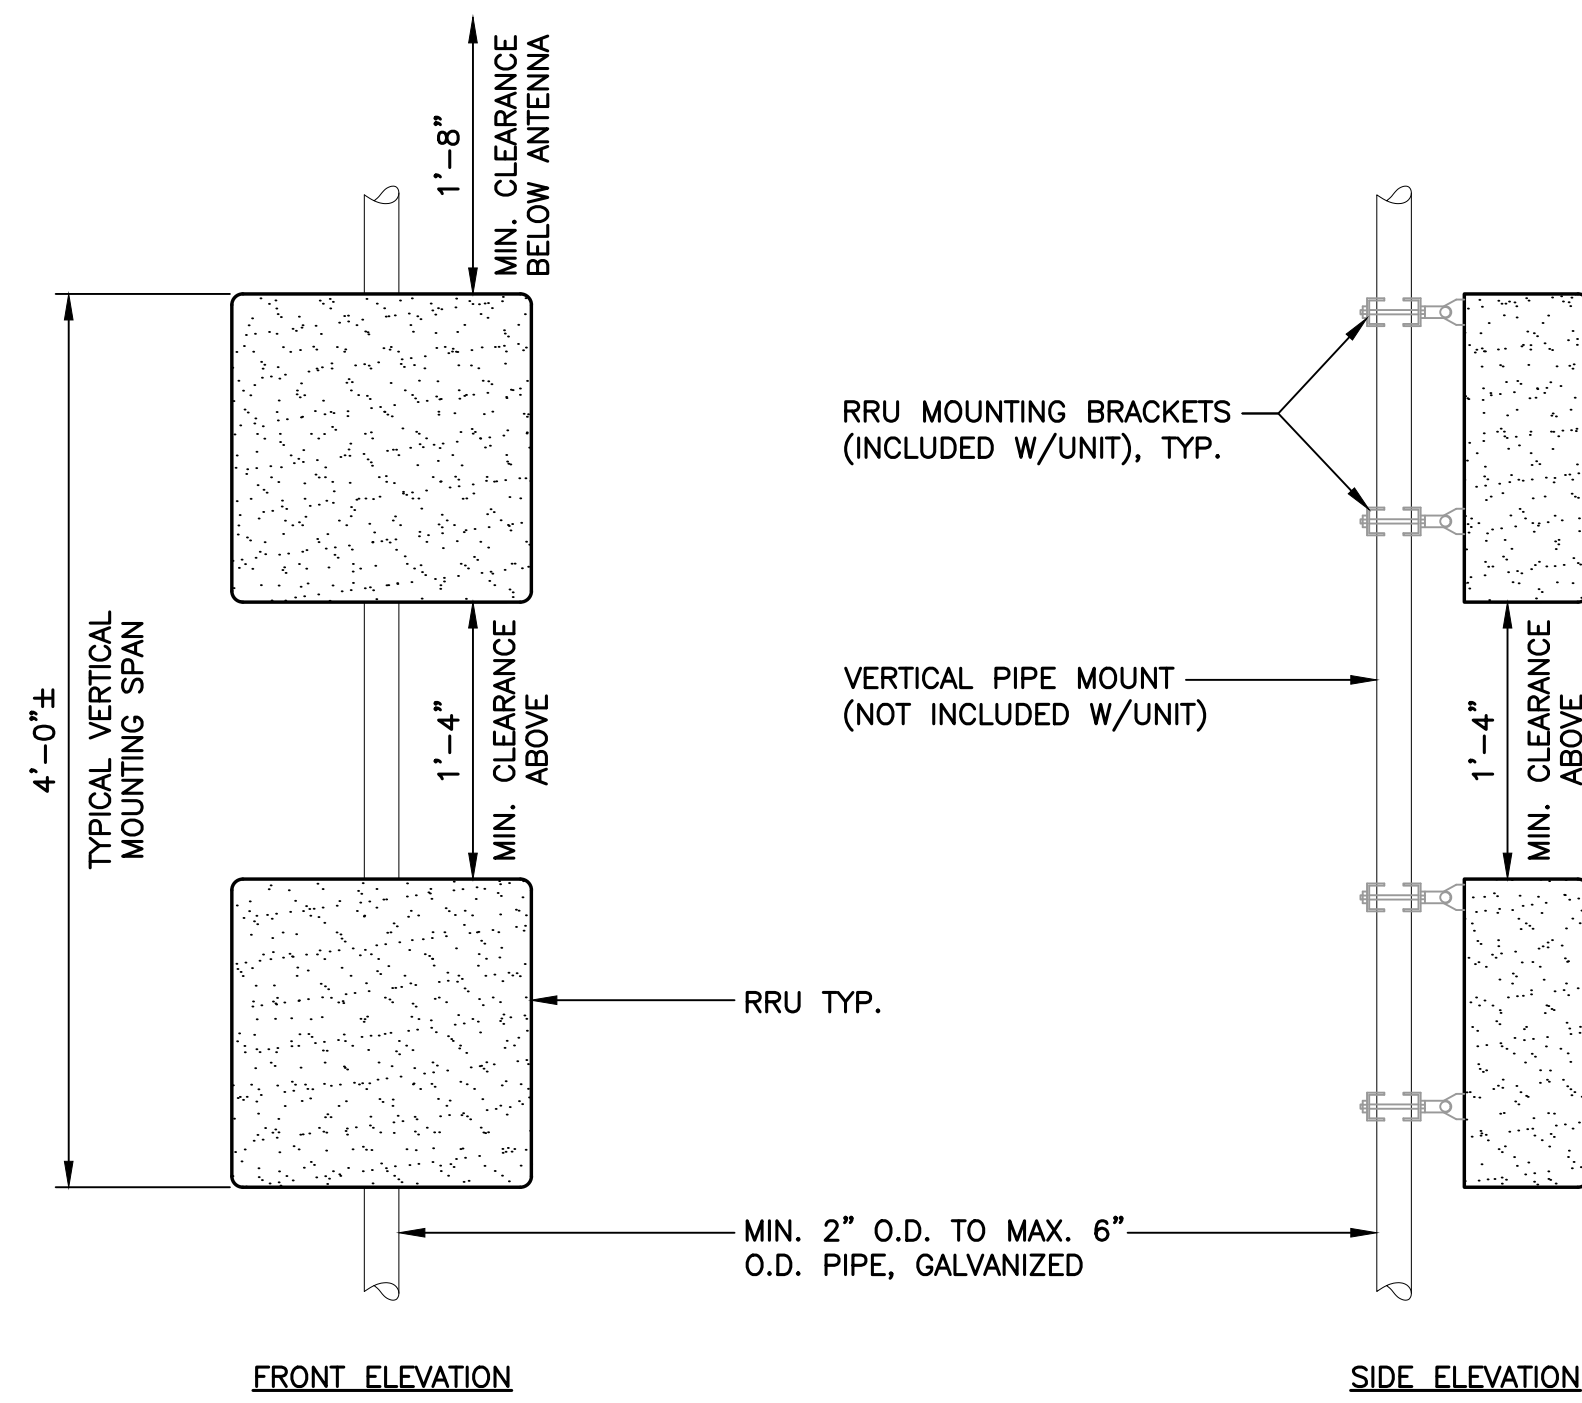

NOTES:

1. T-MOBILE SHALL SUPPLY RRU, AND RRU POLE-MOUNTING BRACKET. CONTRACTOR SHALL SUPPLY POLE/PIPE AND INSTALL ALL MOUNTING HARDWARE INCLUDING ERICSSON RRU POLE-MOUNTING BRACKET. CONTRACTOR SHALL INSTALLS RRU AND MAKES CABLE TERMINATIONS.
2. NO PAINTING OF THE RRU OR SOLAR SHIELD IS ALLOWED.

1 TYPICAL RRU MOUNTING DETAIL
C-5 SCALE: NOT TO SCALE



ALPHA/BETA/GAMMA ANTENNA		
EQUIPMENT	DIMENSIONS	WEIGHT
MAKE: ERICSSON MODEL: AIR6449 B41	33.1"L x 20.6"W x 8.6"D	±104 LBS.
MAKE: RFS MODEL: APXVAARR24_43-U-NA20	95.9"L x 24.0"W x 8.7"D	±128 LBS.
MAKE: COMMSCOPE MODEL: VV-65A-R1	54.7"L x 12.08"W x 4.6"D	±23 LBS.

NOTES:
1. CONTRACTOR TO COORDINATE FINAL EQUIPMENT MODEL SELECTION WITH T-MOBILE CONSTRUCTION MANAGER PRIOR TO ORDERING.


2 PROPOSED ANTENNA DETAIL
C-5 SCALE: NOT TO SCALE



RRU (REMOTE RADIO UNIT)			
EQUIPMENT	DIMENSIONS	WEIGHT	CLEARANCES
MAKE: ERICSSON MODEL: RADIO 4460 B25+B66	19.6"L x 15.7"W x 12.1"D	±109 LBS.	BEHIND ANT.: 8" MIN. BELOW ANT.: 20" MIN. BELOW RRU: 16" MIN.
MAKE: ERICSSON MODEL: RADIO 4480 B71+B85	21.8"L x 15.7"W x 7.5"D	±84 LBS.	BEHIND ANT.: 8" MIN. BELOW ANT.: 20" MIN. BELOW RRU: 16" MIN.


NOTES:
1. CONTRACTOR TO COORDINATE FINAL EQUIPMENT MODEL SELECTION WITH T-MOBILE CONSTRUCTION MANAGER PRIOR TO ORDERING.

3 PROPOSED RRU DETAIL
C-5 SCALE: NOT TO SCALE

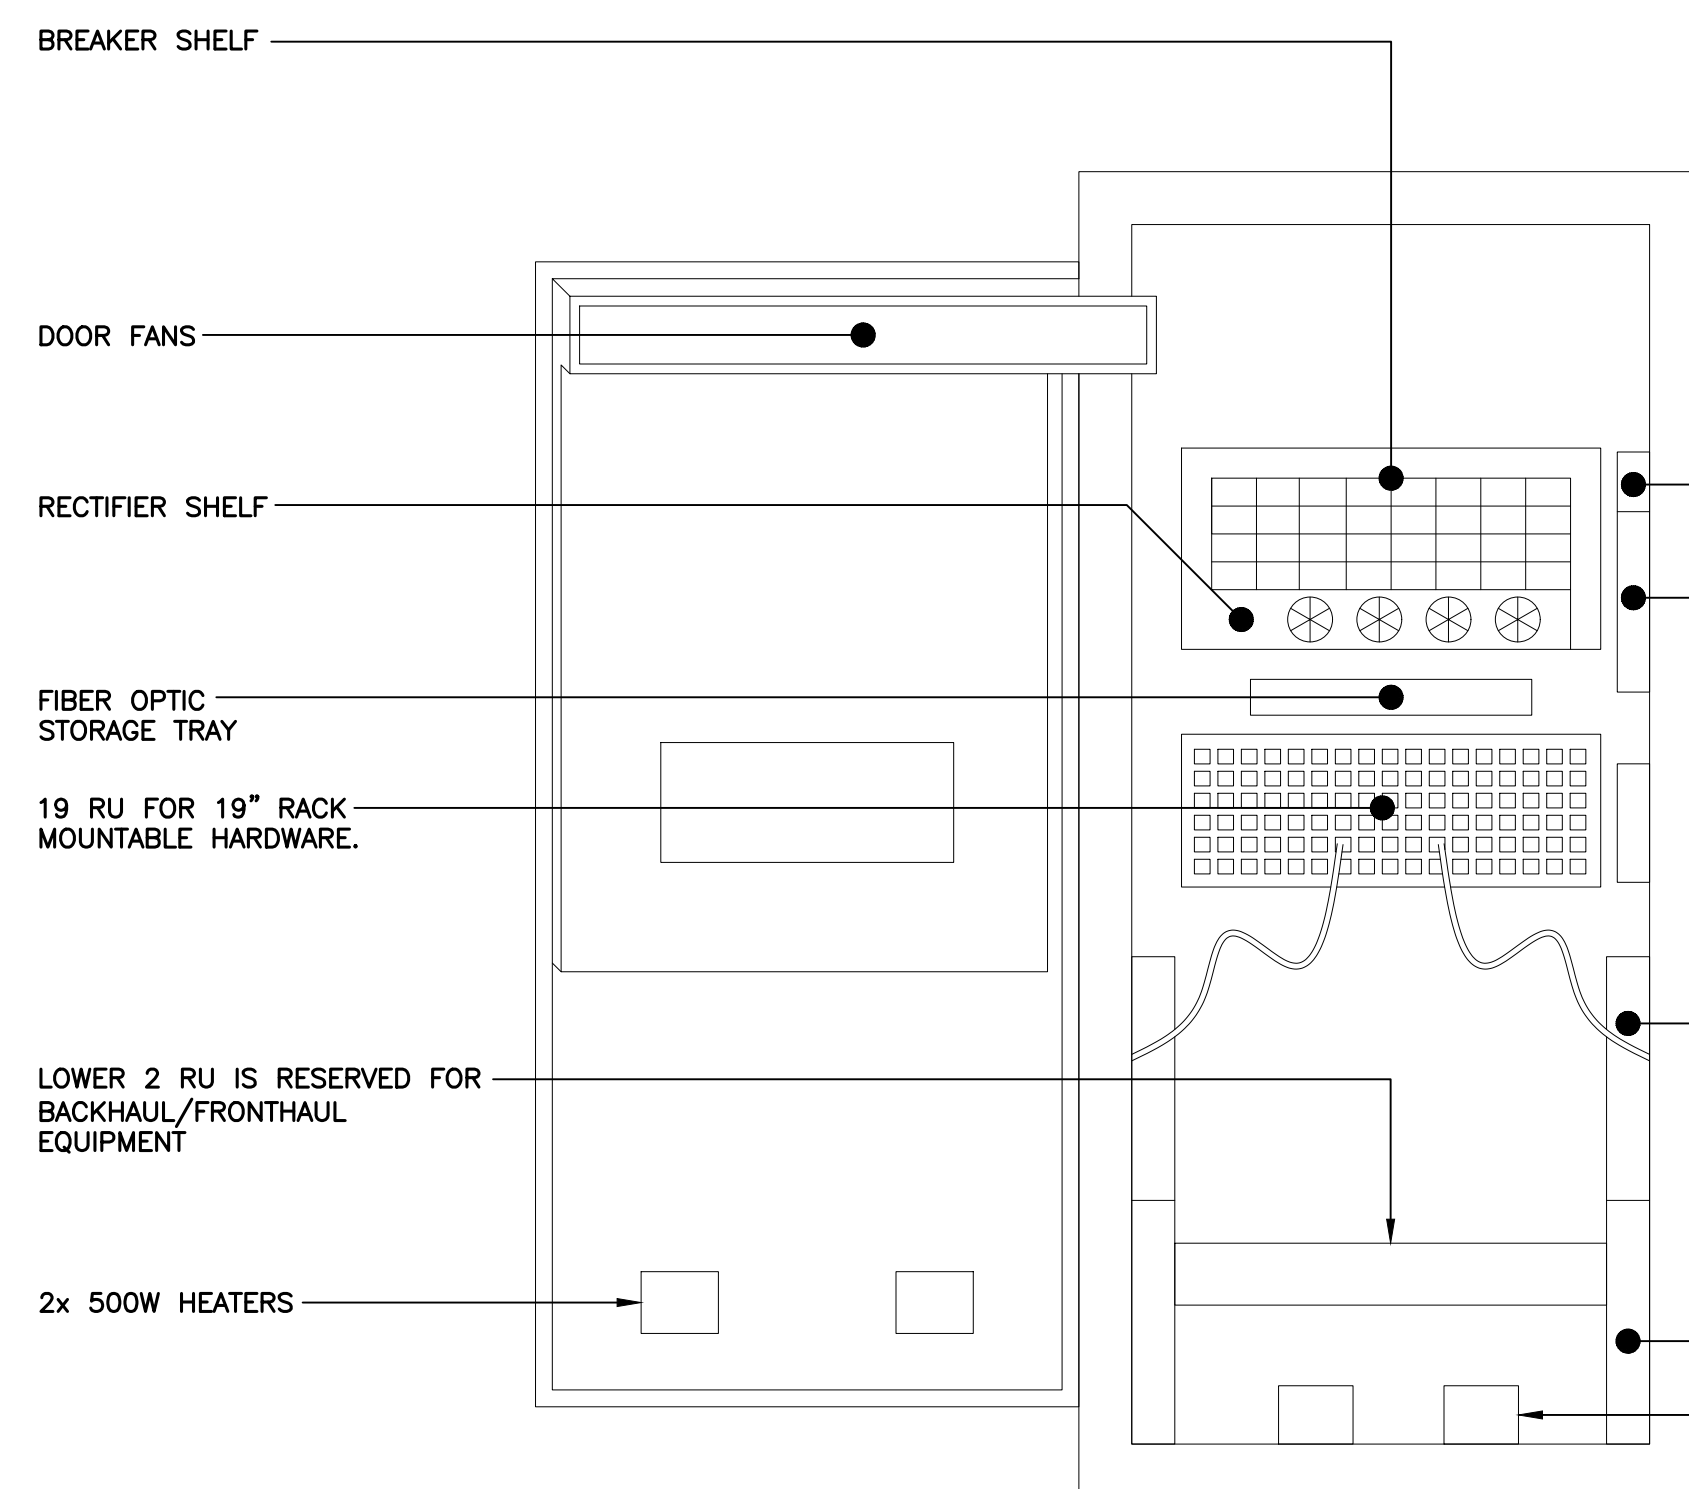

EQUIPMENT CABINET		
EQUIPMENT	DIMENSIONS	WEIGHT
MAKE: ERICSSON MODEL: ENCLOSURE 6160 CABINET	62.0"H x 26.0"W x 26.0"D	±1200 LBS

4 ENCLOSURE 6160 CABINET DETAIL
C-5 SCALE: NOT TO SCALE

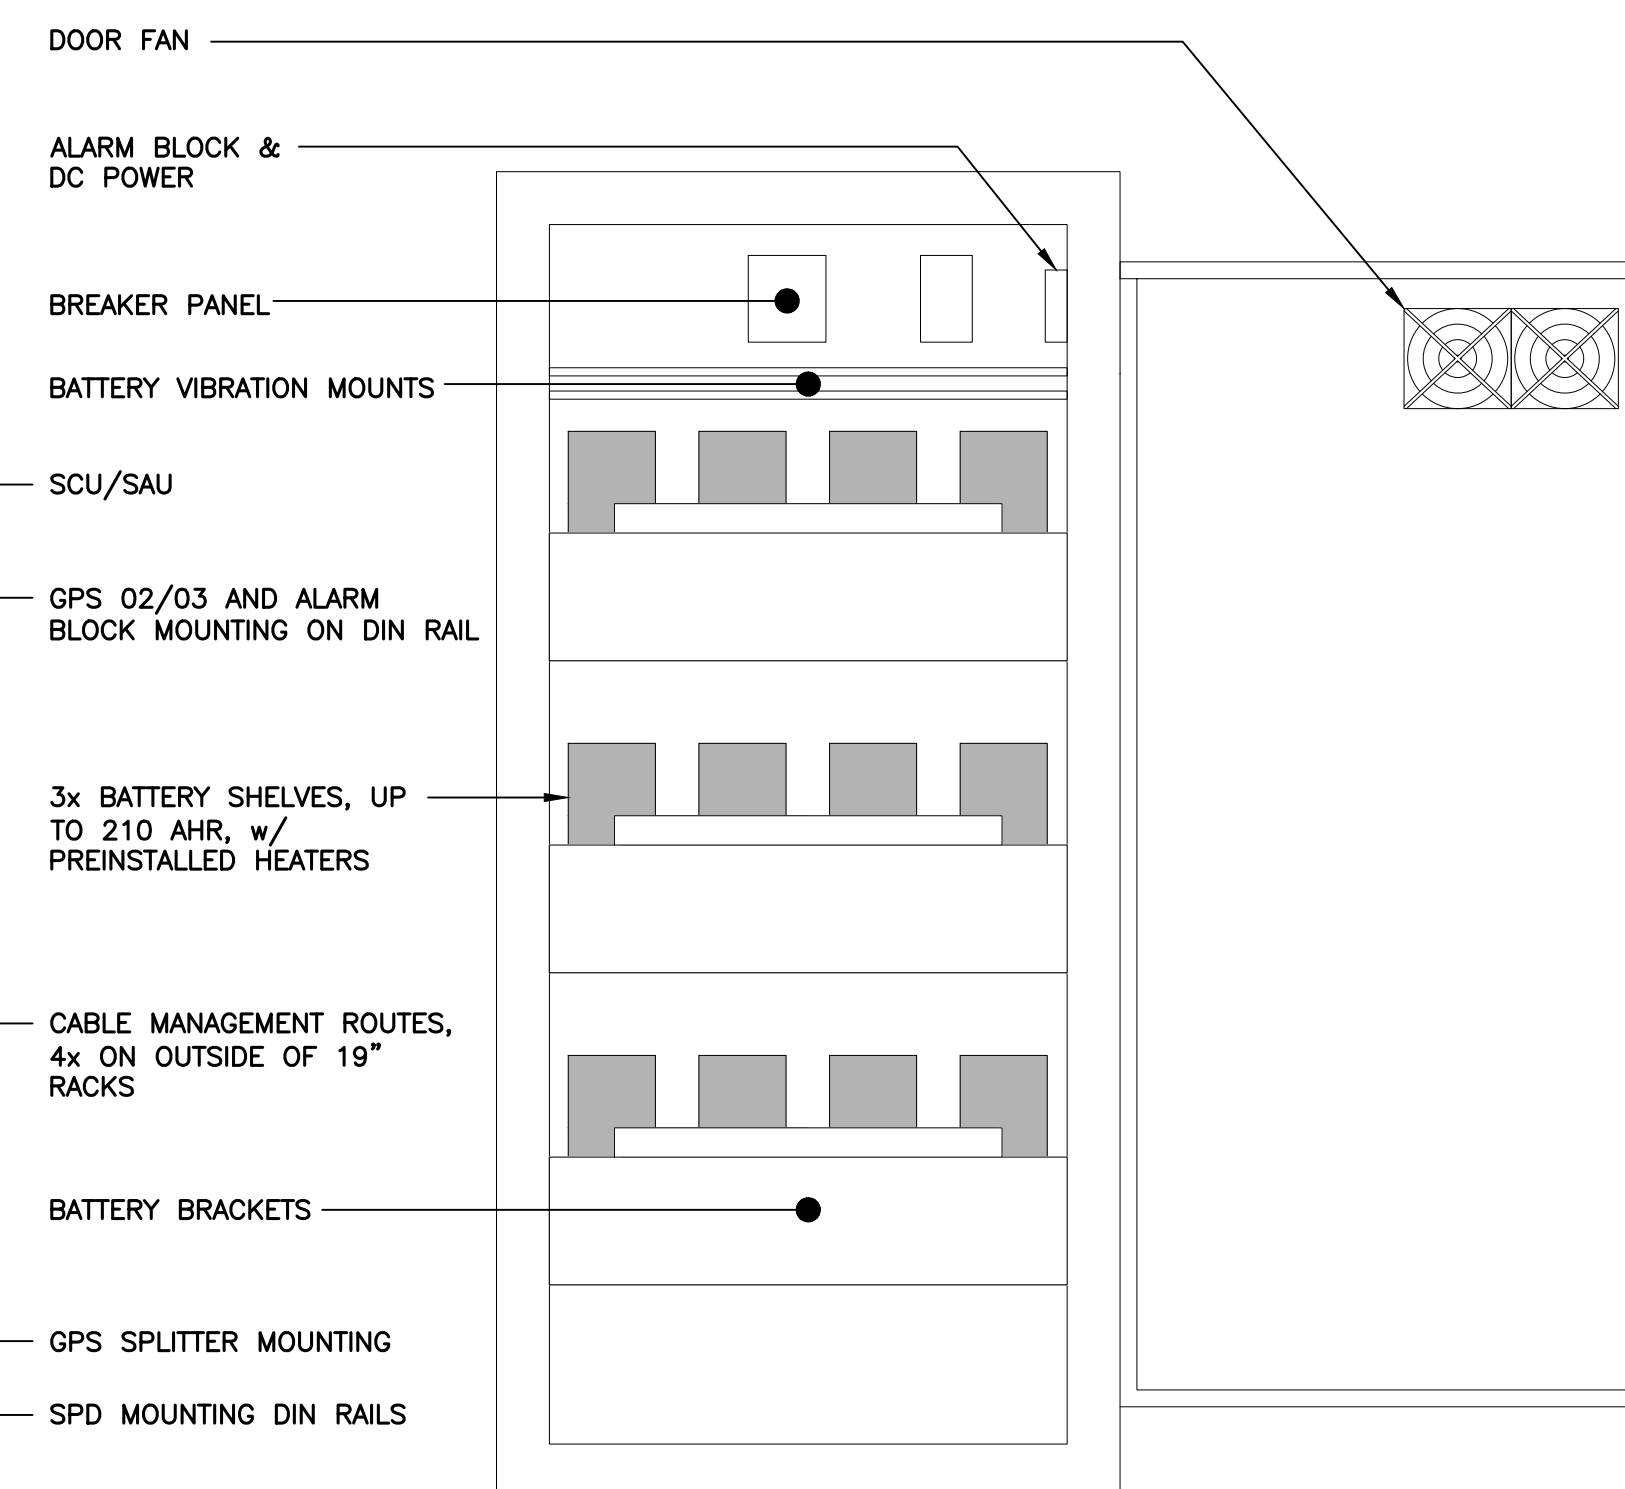

EQUIPMENT CABINET		
EQUIPMENT	DIMENSIONS	WEIGHT
MAKE: ERICSSON MODEL: BATTERY B160 CABINET	62.0"H x 26.0"W x 26.0"D	±1883 LBS

5 BATTERY B160 CABINET DETAIL
C-5 SCALE: NOT TO SCALE

REV.	DATE	TUR	DESCRIPTION
2	12/20/21	RTS	CONSTRUCTION DRAWINGS - REVISED PER UPDATED SA
1	10/12/21	RTS	CONSTRUCTION DRAWINGS - REVISED PER NEW RFD'S
0	08/24/21	RTS	CONSTRUCTION DRAWINGS - ISSUED FOR CONSTRUCTION

PROFESSIONAL ENGINEER SEAL

Sprint
T-Mobile

CENTEK engineering
Centered on solutions™


(203) 488-0580
(203) 488-6587 Fax
63-2 North Branford Road
Branford, CT 06405
www.CentekEng.com

T-MOBILE NORTHEAST LLC
SPRINT ID: CT33XC004
SITE ID: CTHA826A
9 SOUTH ROAD
STAFFORD SPRINGS, CT 06077

DATE:	05/28/21
SCALE:	AS NOTED
JOB NO.	21005.31


TYPICAL EQUIPMENT DETAILS

C-5

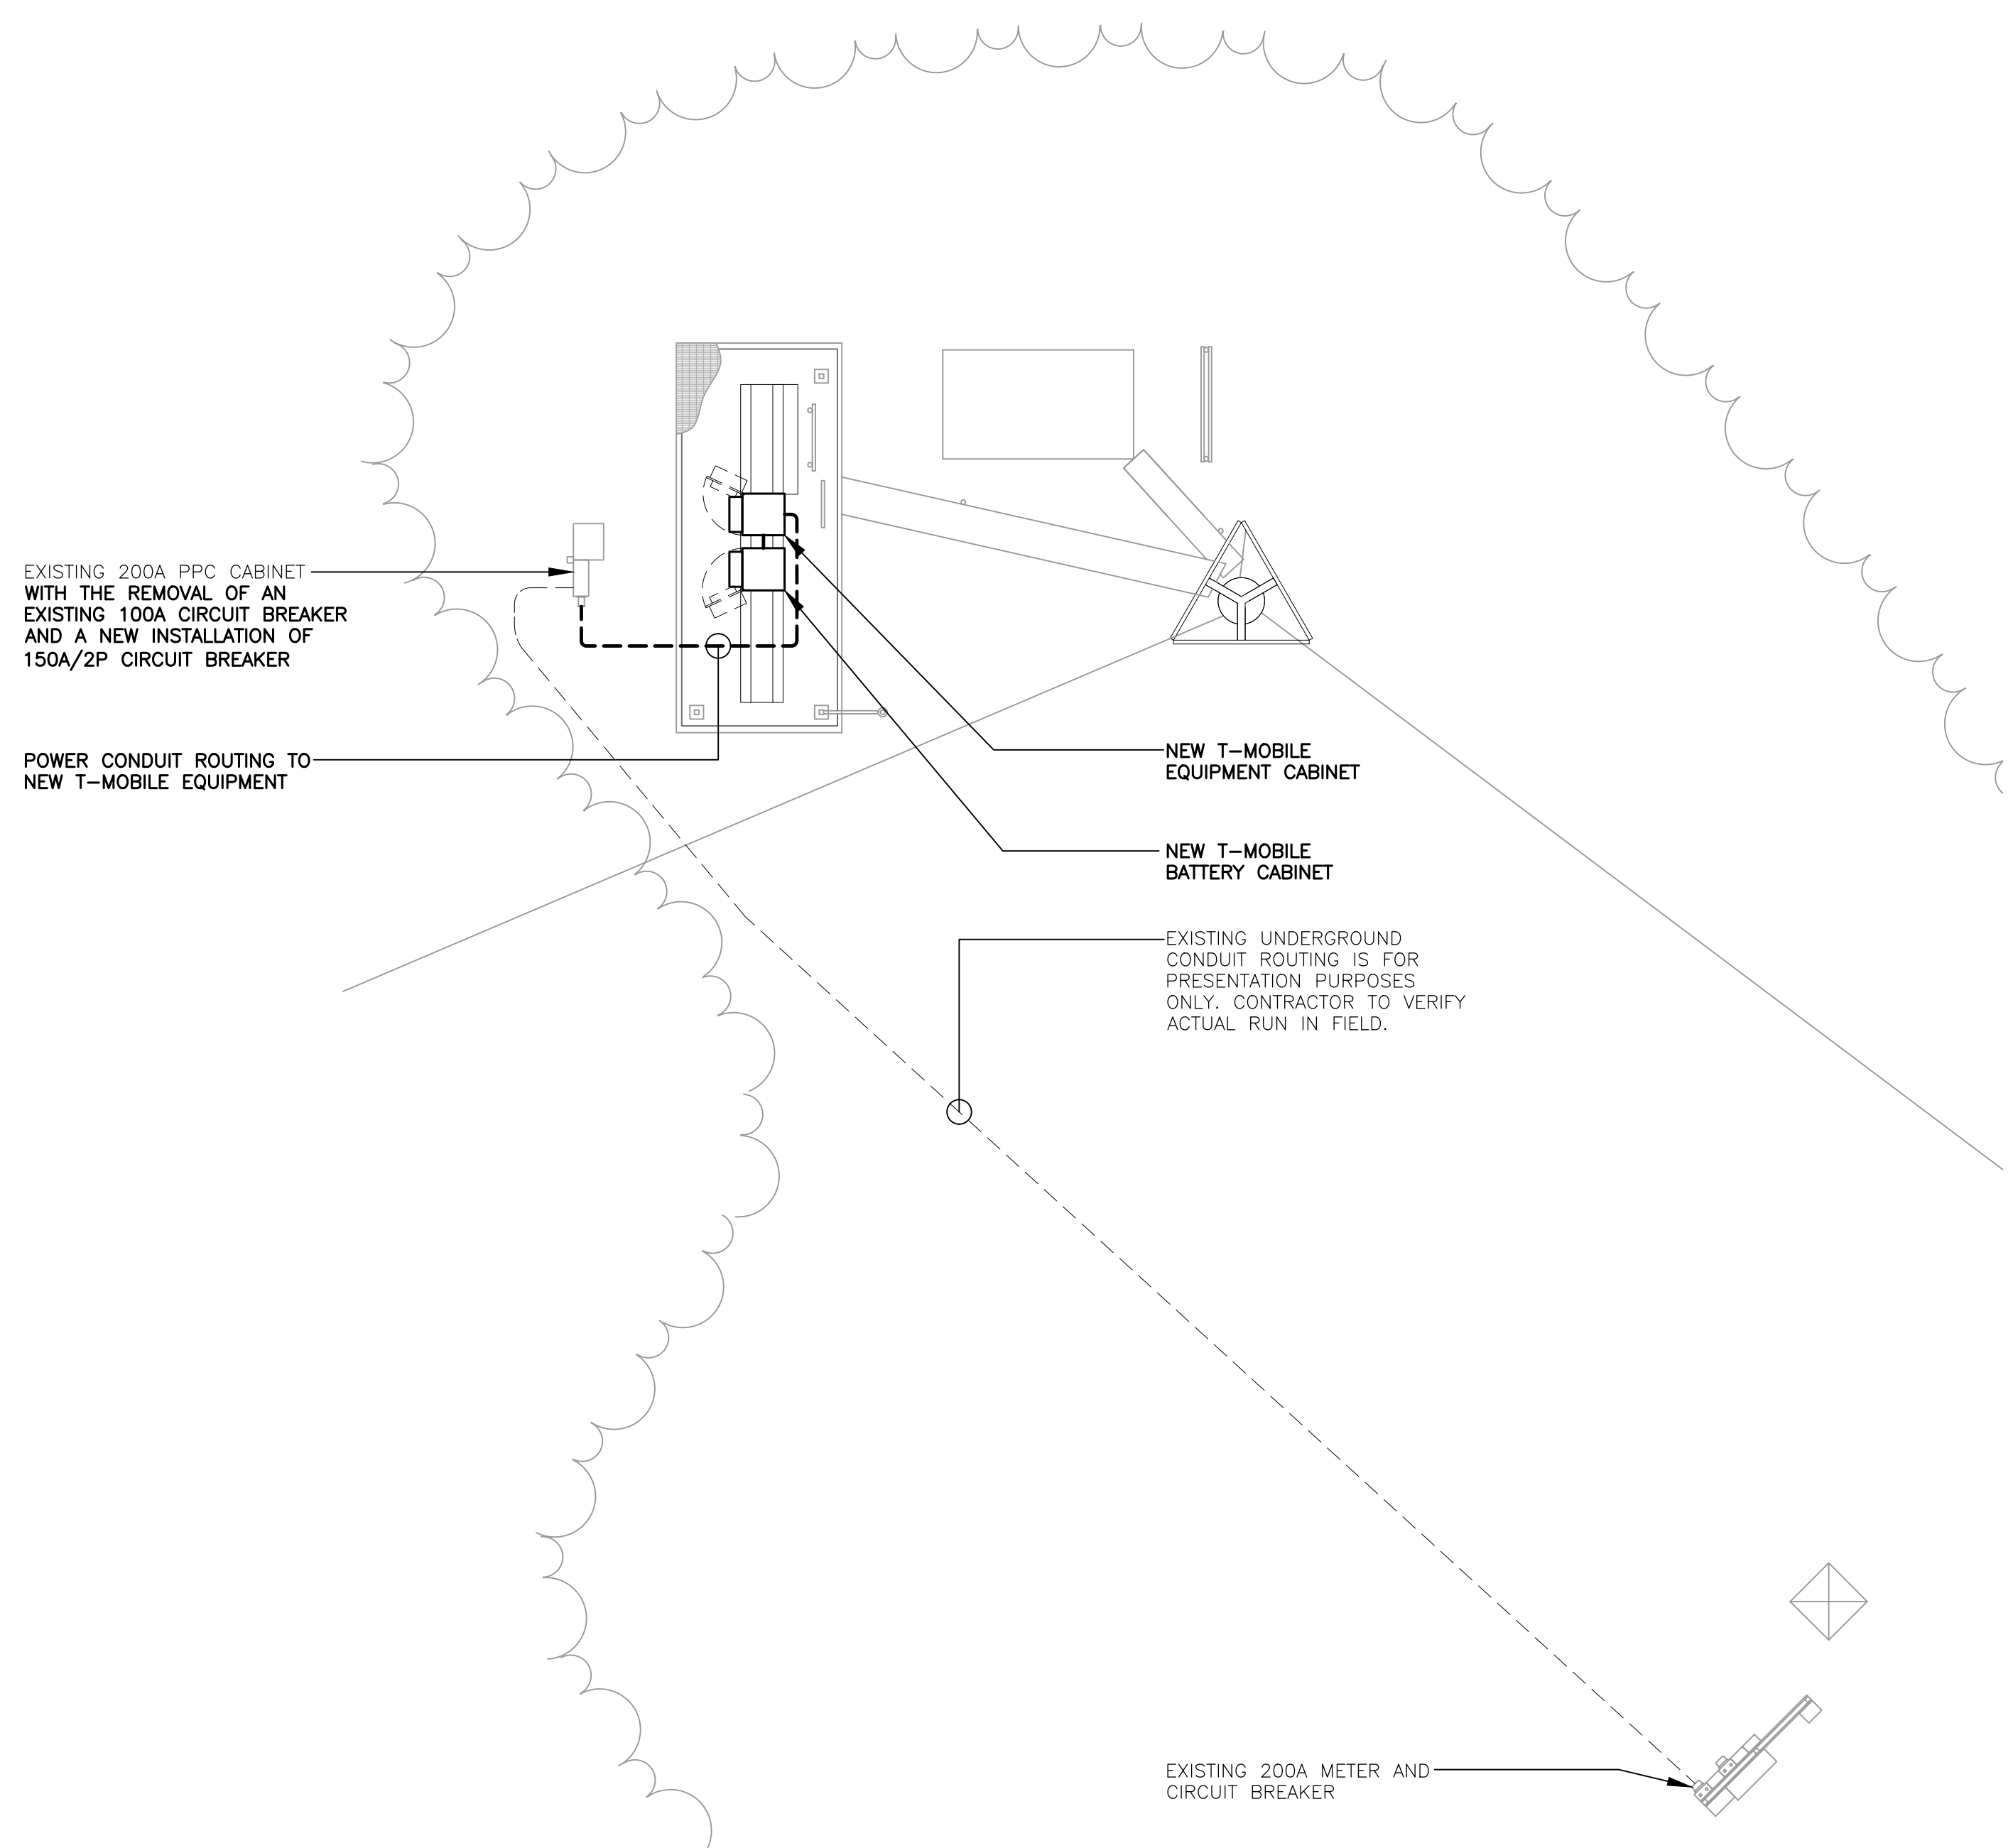


1
E-1 **ELECTRICAL CONDUIT ROUTING PLAN**
SCALE: NOT TO SCALE

- RISER DIAGRAM NOTES**
- 1 EXISTING 200A, PPC CABINET TO REMAIN.
 - 2 NEW 150A/2P CIRCUIT BREAKER TO SERVE NEW EQUIPMENT CABINET.
 - 3 EXISTING CABINETS AND ASSOCIATED CONDUITS AND CONDUCTORS TO BE REMOVED.
 - 4 (3) 1/0 AWG, (1) #6 AWG GROUND, 1-1/2" CONDUIT.
 - 5 NEW T-MOBILE EQUIPMENT CABINET
 - 6 NEW T-MOBILE BATTERY CABINET
 - 7 DC CONDUIT AND CONDUCTORS FOR BATTERY CABINET CONNECTION PER MANUFACTURERS SPECIFICATIONS.
 - 8 EXISTING 100A CIRCUIT BREAKER TO BE REMOVED

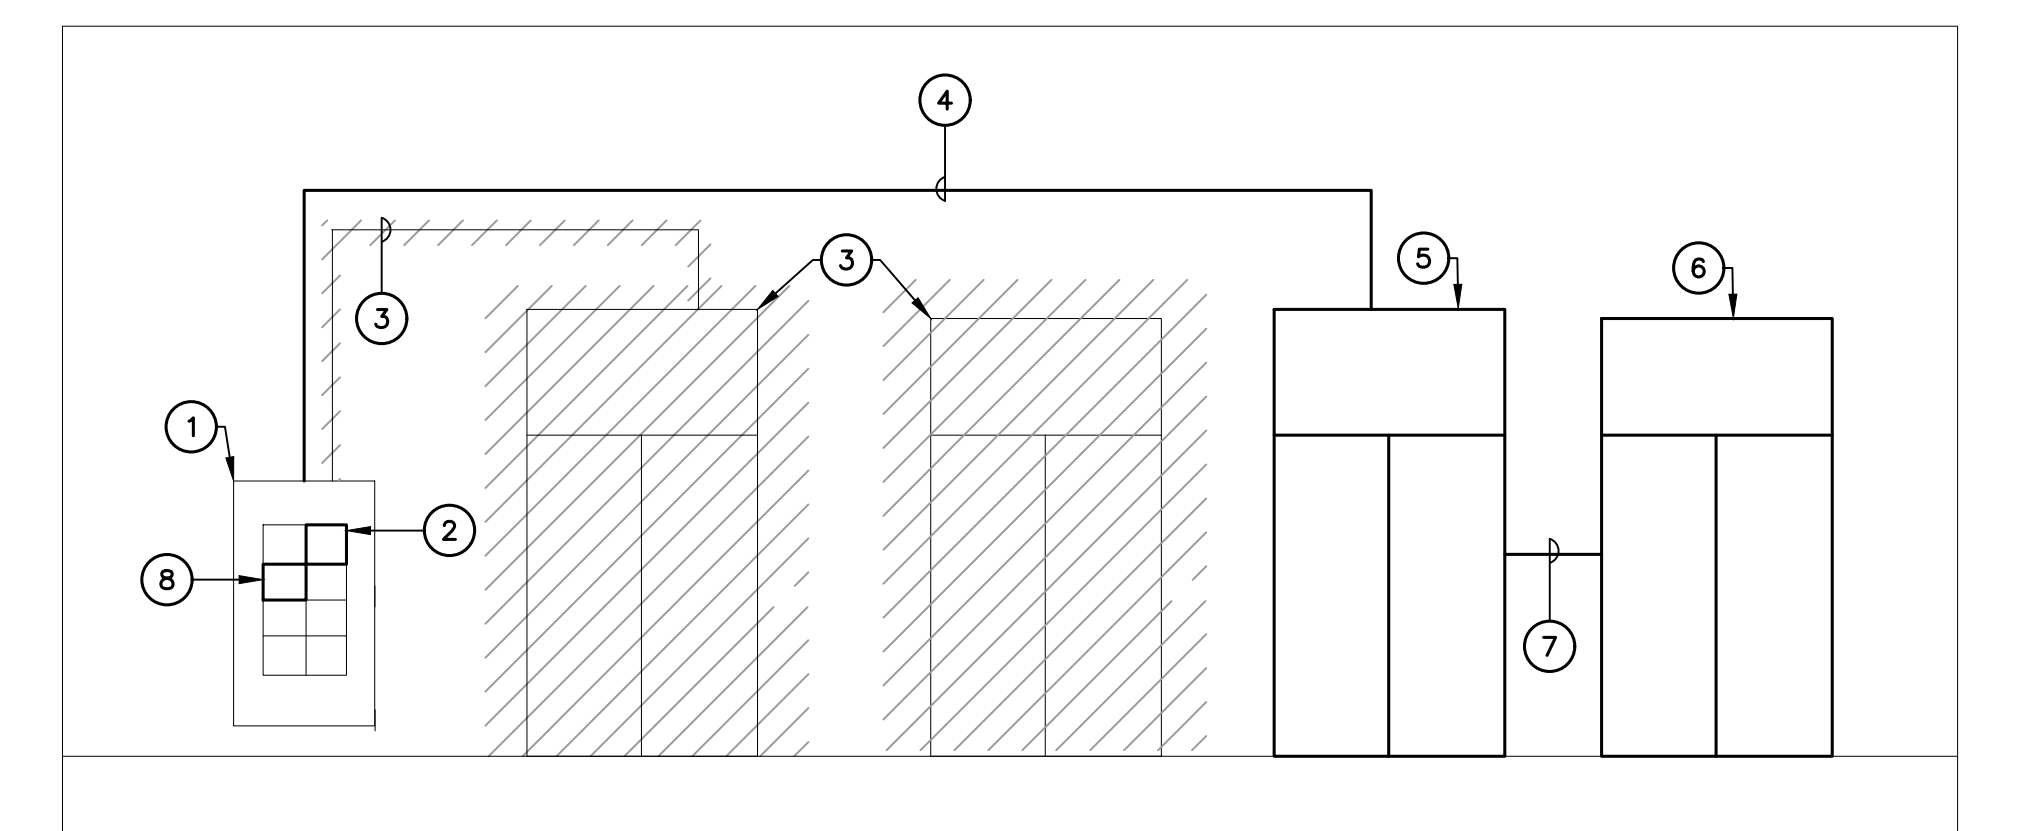

2
E-1 **ELECTRICAL POWER RISER DIAGRAM**
SCALE: NOT TO SCALE


<p>CENTEK engineering Centered on solutions™</p> <p>(203) 488-0580 (203) 488-6567 Fax 63-2 North Branford Road Branford, CT 06405 www.CentekEng.com</p>			
<p>T-MOBILE NORTHEAST LLC</p>		<p>SPRINT ID: CT33XC004</p> <p>SITE ID: CTHA826A</p> <p>9 SOUTH ROAD STAFFORD SPRINGS, CT 06077</p>	
DATE:	05/28/21	TUR	CONSTRUCTION DRAWINGS - REVISED PER UPDATED SA
SCALE:	AS NOTED	RTS	CONSTRUCTION DRAWINGS - REVISED PER NEW RFDS
JOB NO.	21005.31	RTS	CONSTRUCTION DRAWINGS - ISSUED FOR CONSTRUCTION
<p>ELECTRICAL RISER DIAGRAM AND CONDUIT ROUTING</p>			
<p>E-1</p>			
<p>Sheet No. 8 of 10</p>			

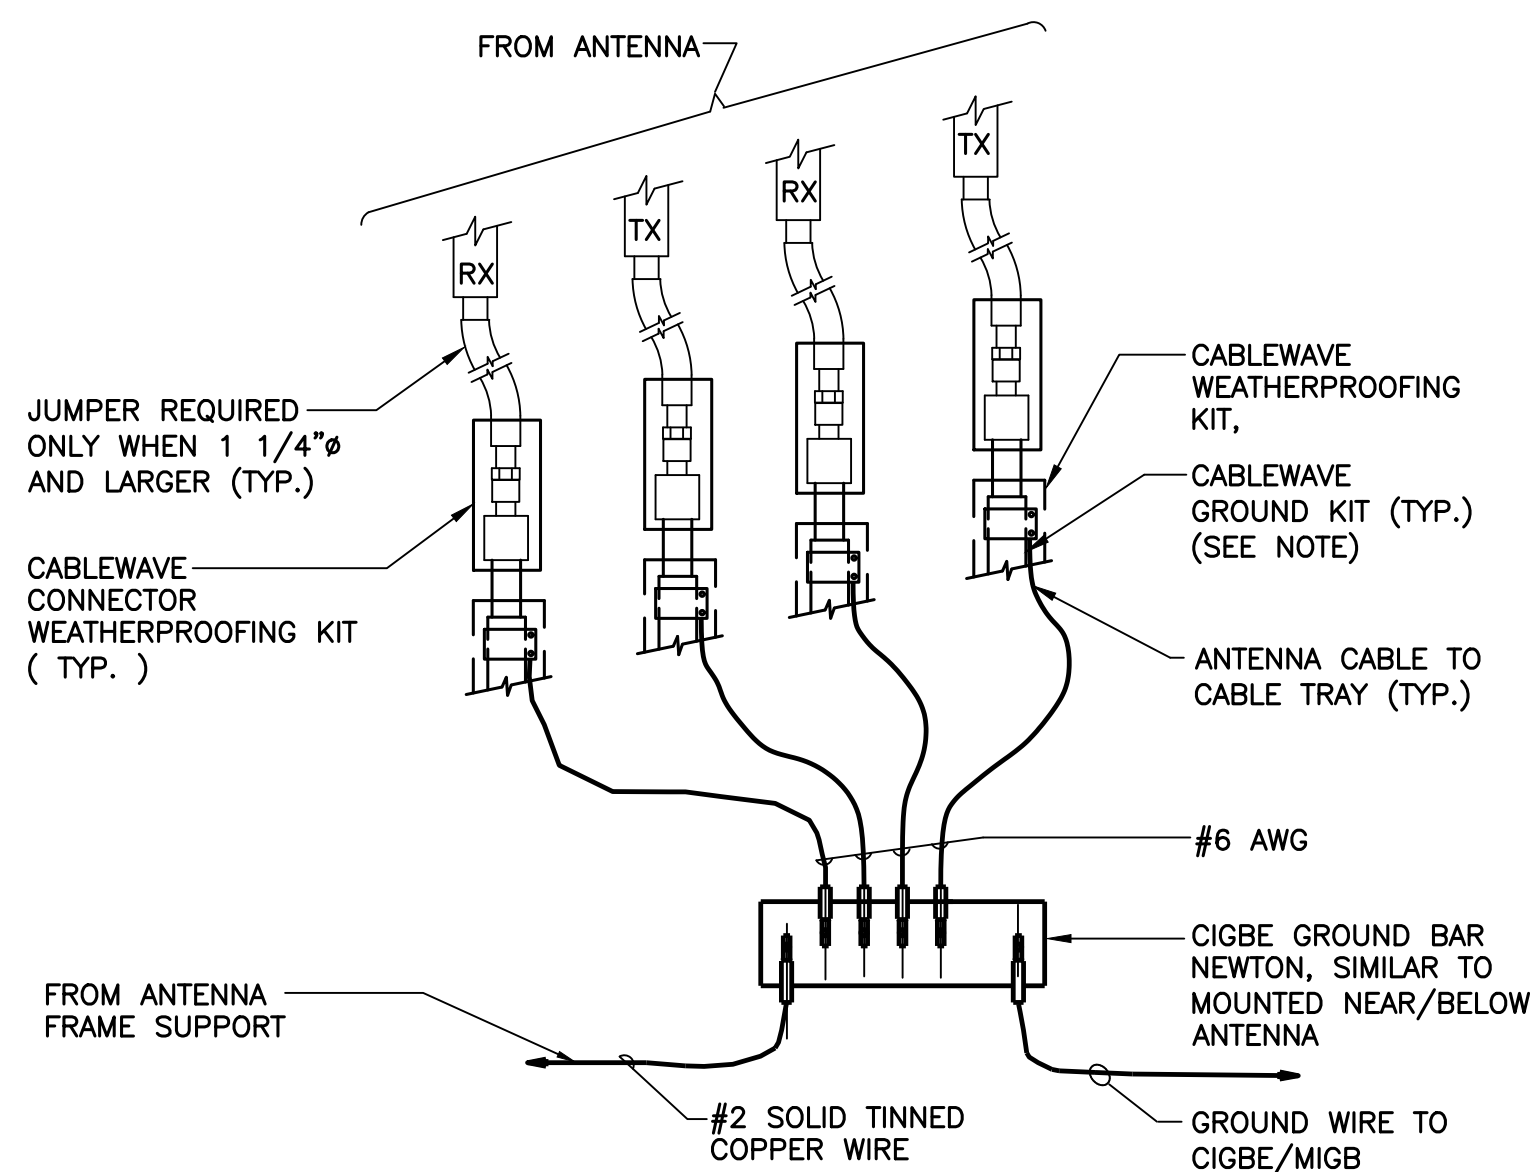

NOTES:

- DO NOT INSTALL CABLE GROUND KIT AT A BEND AND ALWAYS DIRECT GROUND WIRE DOWN TO CIGBE


1 CONNECTION OF GROUND WIRES TO GROUND BAR
E-2 SCALE: NOT TO SCALE

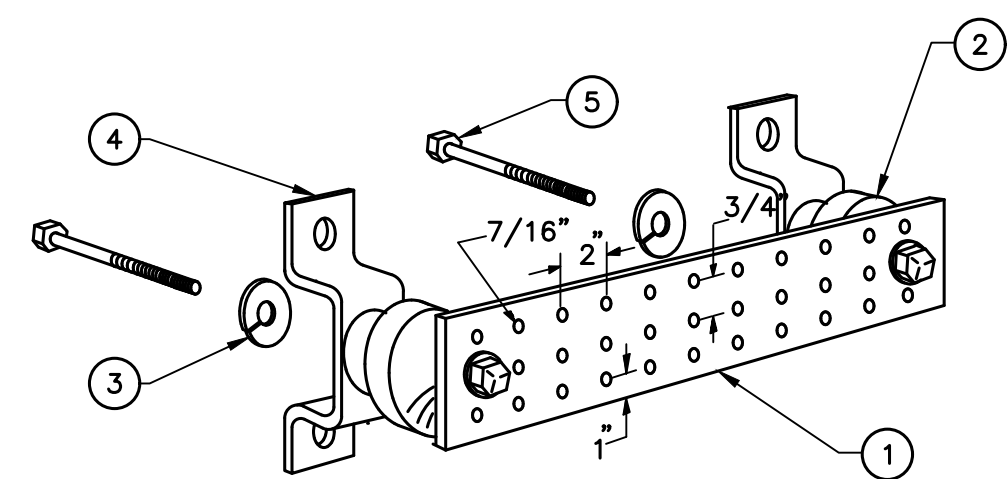

NOTES

- TINNED COPPER GROUND BAR, 1/4" x 4" x 20", NEWTON INSTRUMENT CO. HOLE CENTERS TO MATCH NEMA DOUBLE LUG CONFIGURATION.
- INSULATORS, NEWTON INSTRUMENT CAT. NO. 3061-4.
- 5/8" LOCK WASHERS, NEWTON INSTRUMENT CO. CAT. NO. 3015-8.
- WALL MOUNTING BRACKET, NEWTON INSTRUMENT CO. CAT NO. A-6056.
- 5/8-11 x 1" STAINLESS STEEL TRUSS SPANNER MACHINE SCREWS.


2 GROUND BAR DETAIL
E-2 SCALE: NOT TO SCALE

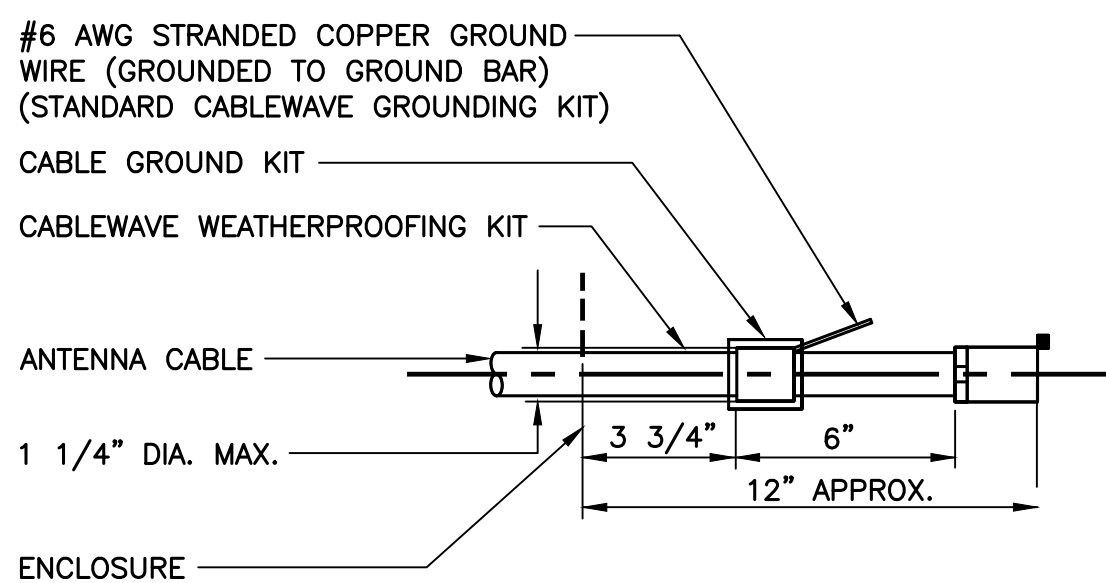

NOTES:

- DO NOT INSTALL CABLE GROUND KIT AT A BEND AND ALWAYS DIRECT GROUND WIRE DOWN TO GROUND BAR.

3 ANTENNA CABLE GROUNDING DETAIL
E-2 SCALE: NOT TO SCALE

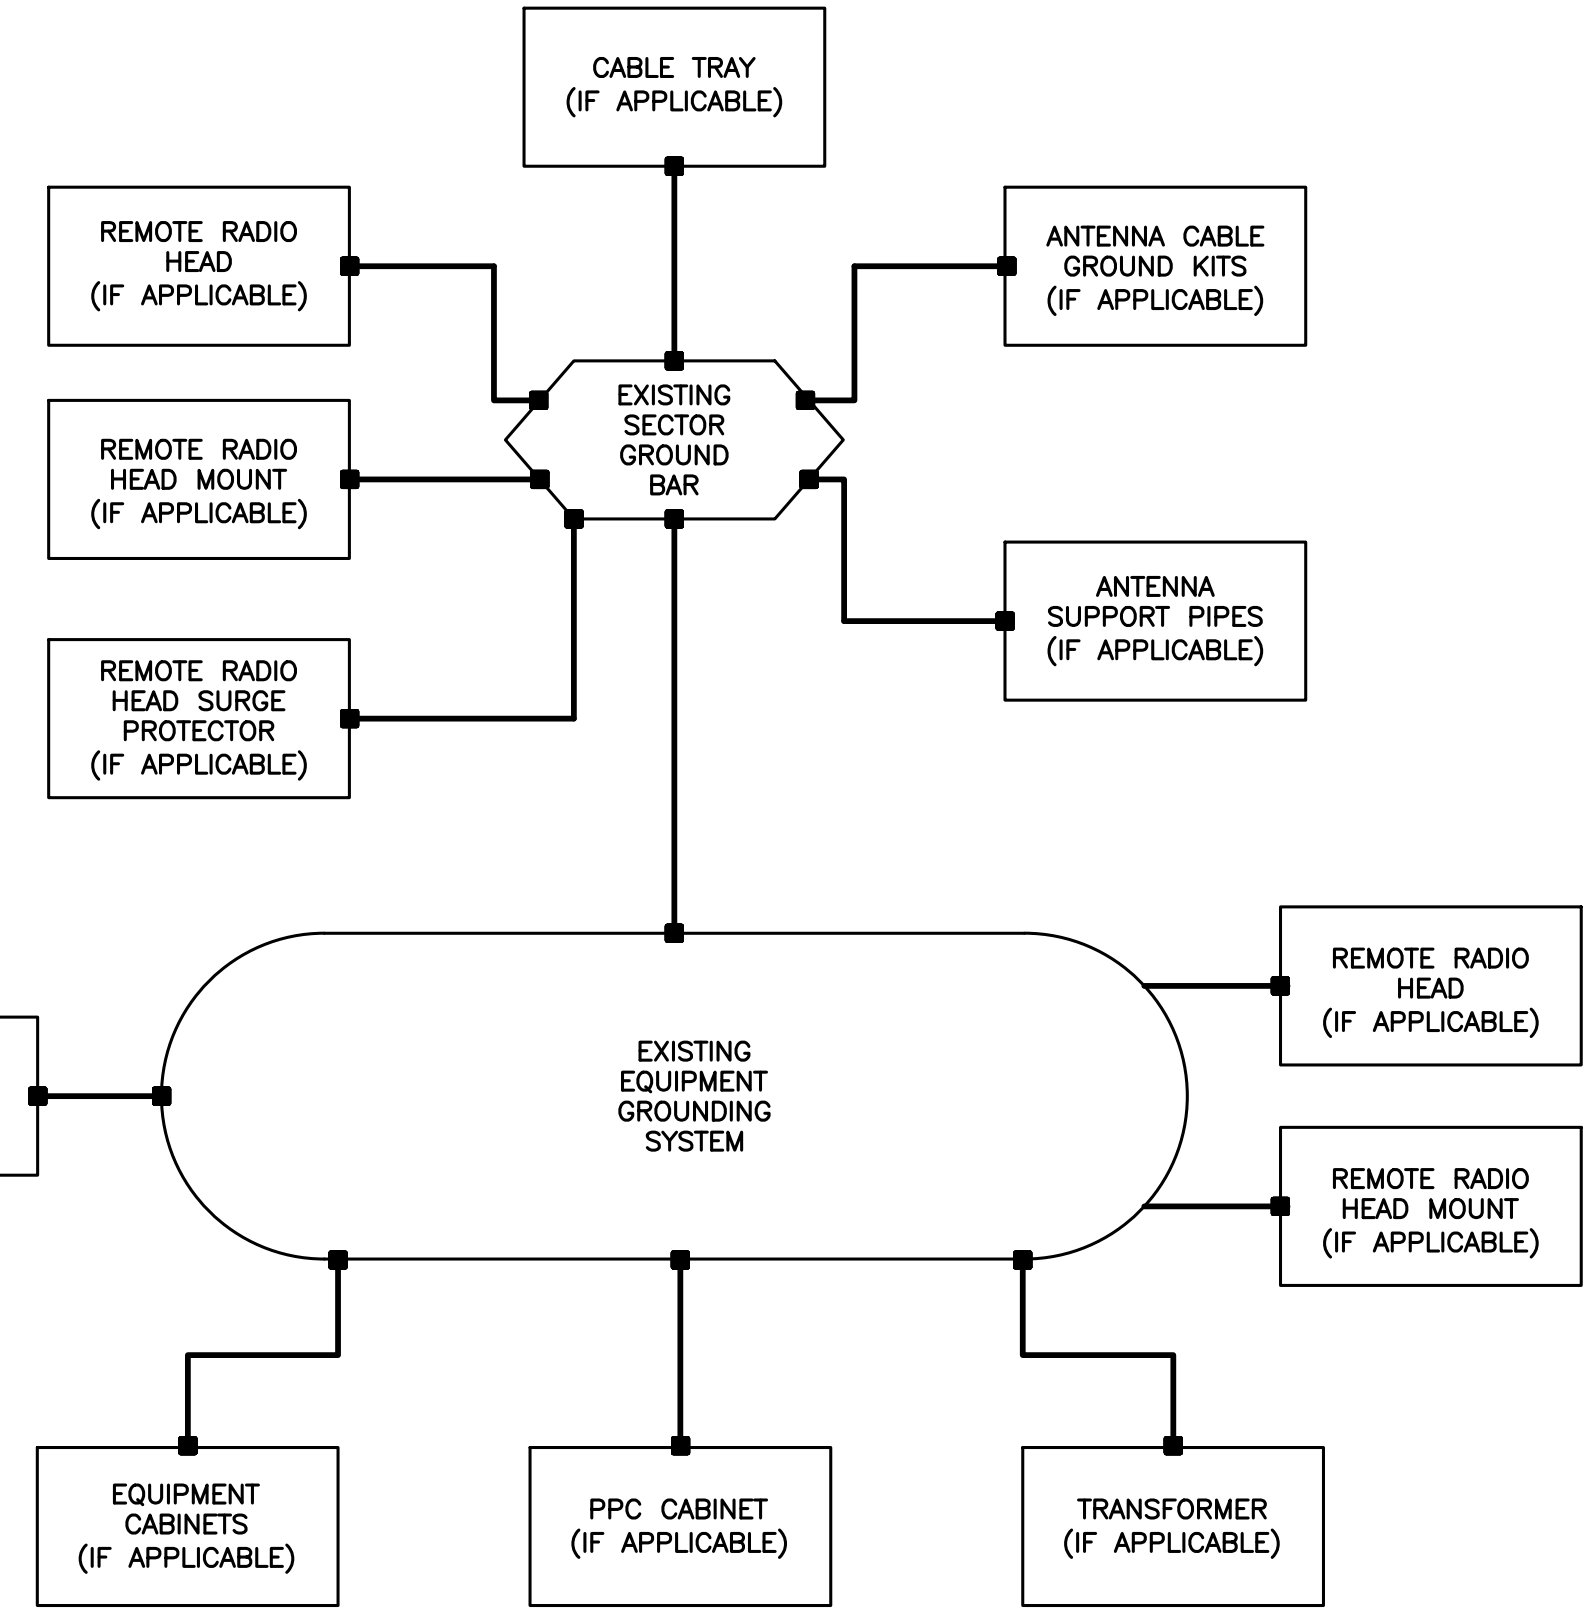


GROUNDING SCHEMATIC NOTES

GENERAL NOTES:


- ALL SURGE SUPPRESSION EQUIPMENT SHALL BE BONDED TO GROUND PER MANUFACTURER'S SPECIFICATIONS
- UNLESS OTHERWISE NOTED OR REQUIRED BY CODE, GROUND CONDUCTORS SHOWN SHALL BE #2 AWG (SOLID TINNED BCW - EXTERIOR; STRANDED GREEN INSULATED - INTERIOR).
- BOND CABLE TRAY SECTIONS TOGETHER WITH #6 AWG STRANDED GREEN INSULATED JUMPERS.
- ALL SECTOR GROUND BARS SHALL BE BONDED TOGETHER WITH #2 AWG SOLID TINNED BCW.
- BOND ALL EQUIPMENT CABINETS AND BATTERY CABINETS TO GROUND PER MANUFACTURER'S SPECIFICATIONS.
- REFER TO ALL ELECTRICAL AND GROUNDING DETAILS.
- COORDINATE ALL ROOF MOUNTED EQUIPMENT WITH OWNER.
- ALL ROOF MOUNTED AMPLIFIERS AND ASSOCIATED EQUIPMENT SHALL BE BONDED TO THE SECTOR GROUND BAR PER MANUFACTURER'S SPECIFICATIONS.
- ALL GROUNDING SHALL BE IN ACCORDANCE WITH NEC AND OWNER'S REQUIREMENTS.

7 ELECTRICAL SCHEMATIC DIAGRAM
E-2 SCALE: NOT TO SCALE

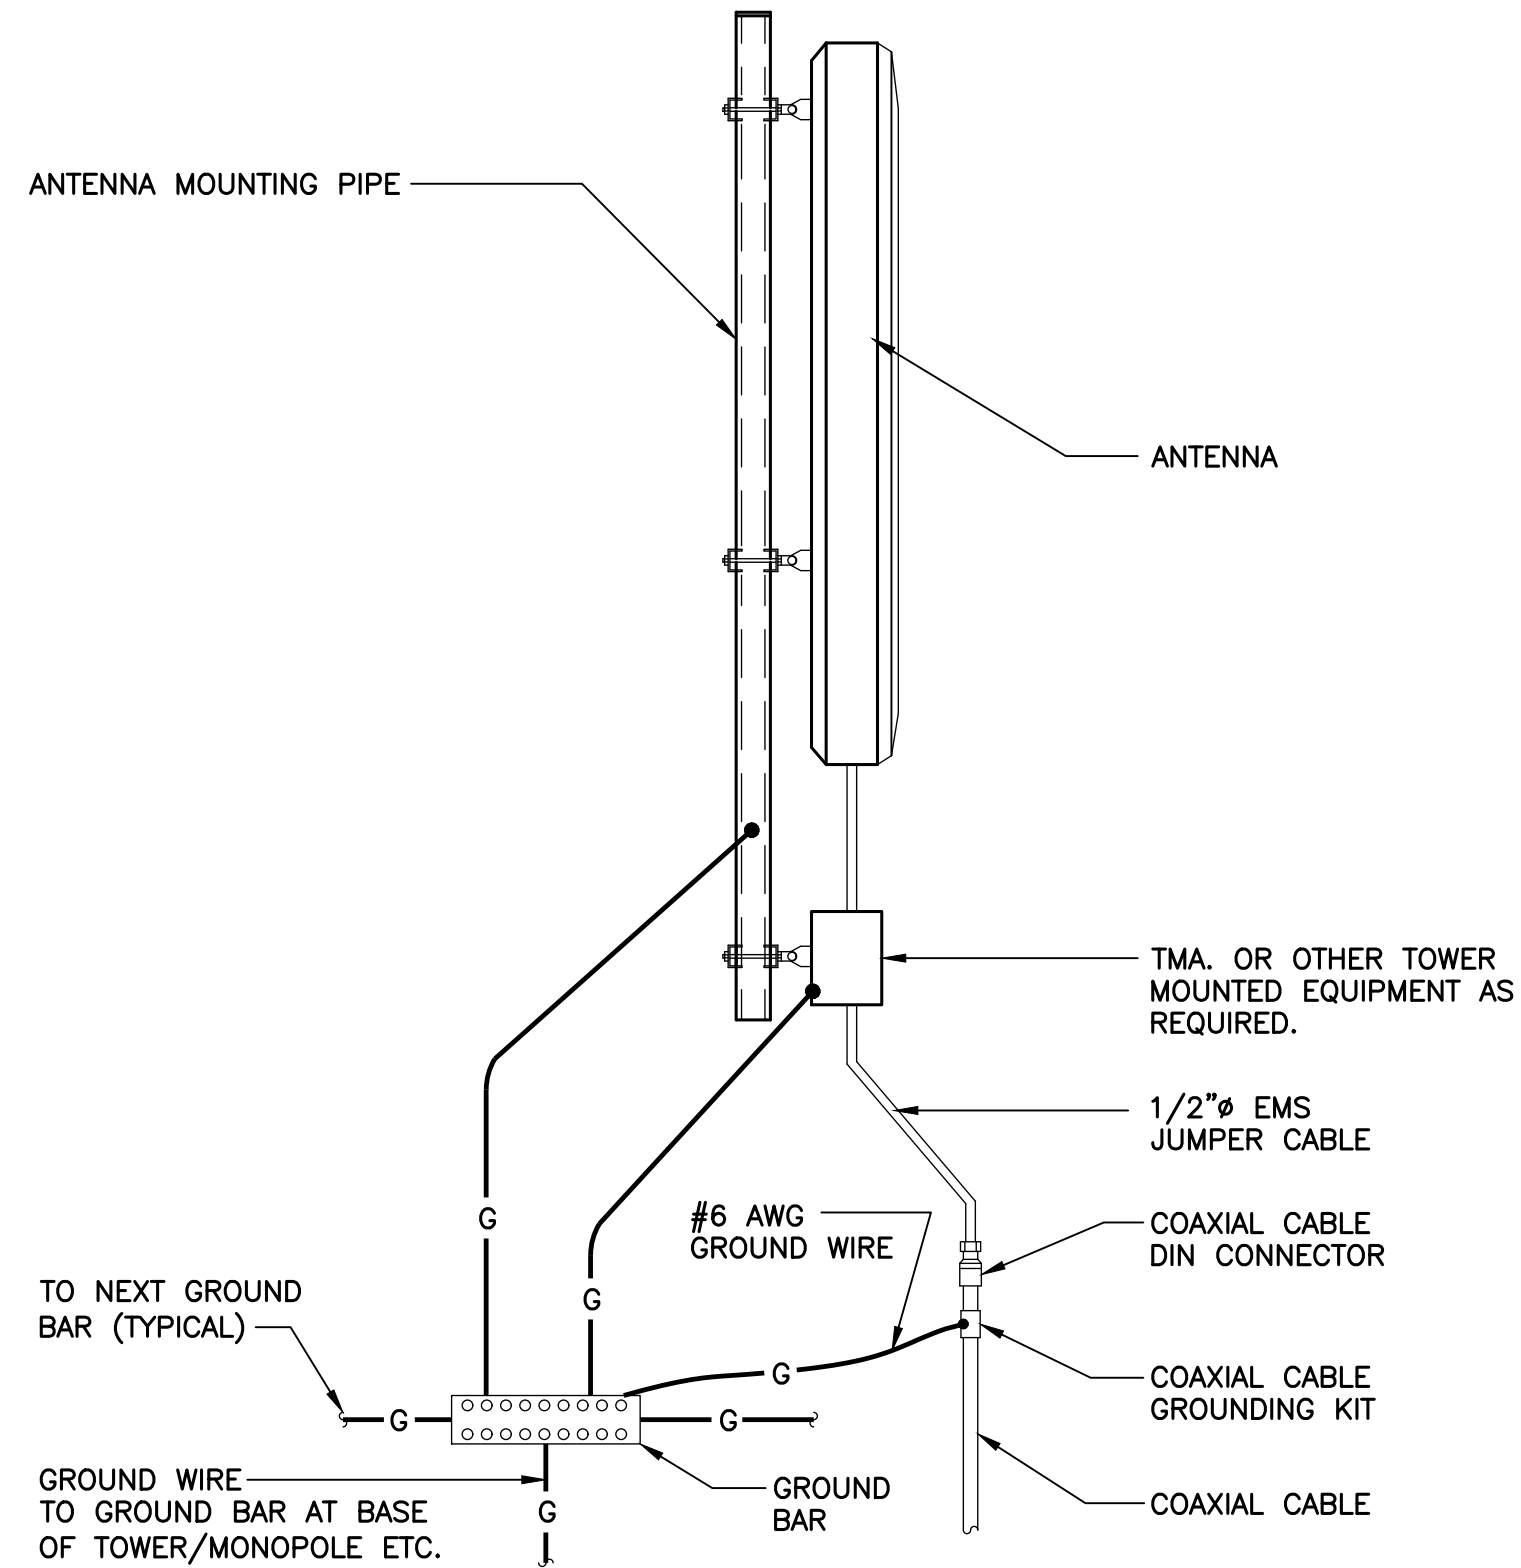


4 TYPICAL ANTENNA GROUNDING DETAIL
E-2 SCALE: NOT TO SCALE

EACH RRH CABINET SHALL BE GROUNDED IN THE FOLLOWING MANNER:
1. AT TOP OF THE CABINET
2. AT RIGHT SIDE OF THE CABINET.

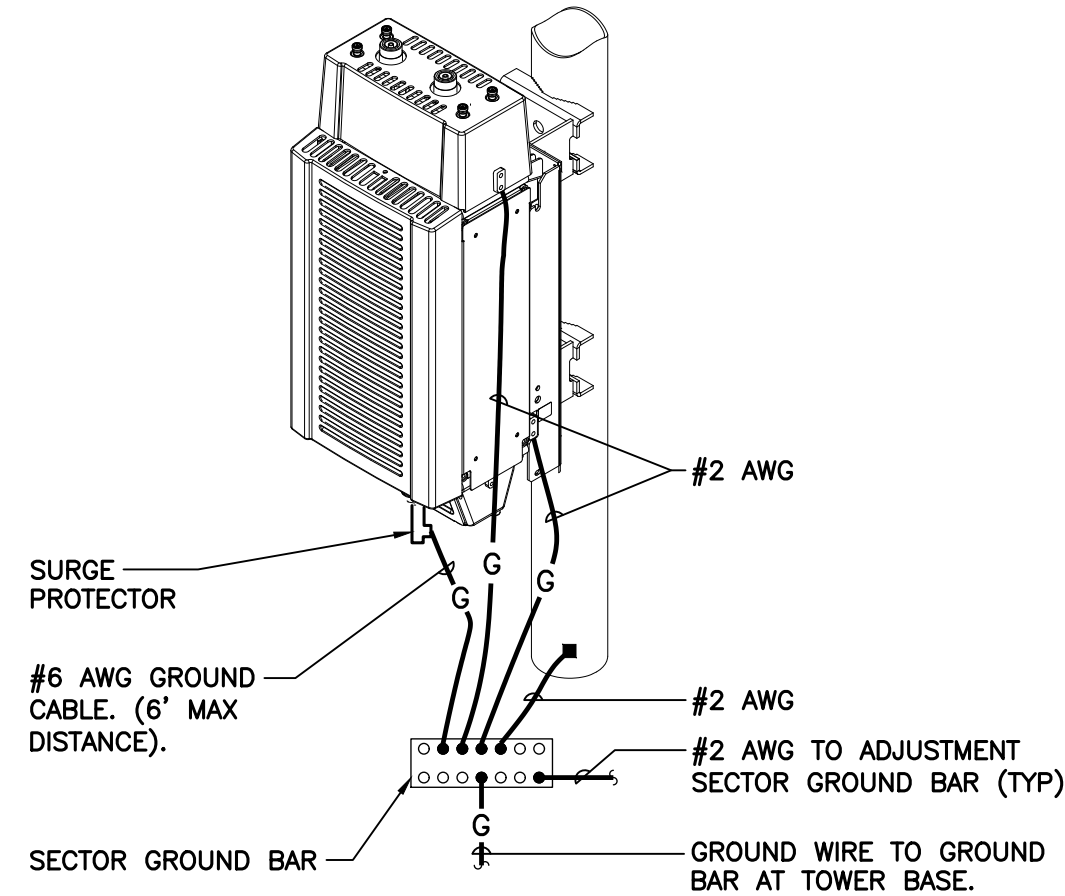


5 RRH POLE MOUNT GROUNDING
E-2 SCALE: NOT TO SCALE

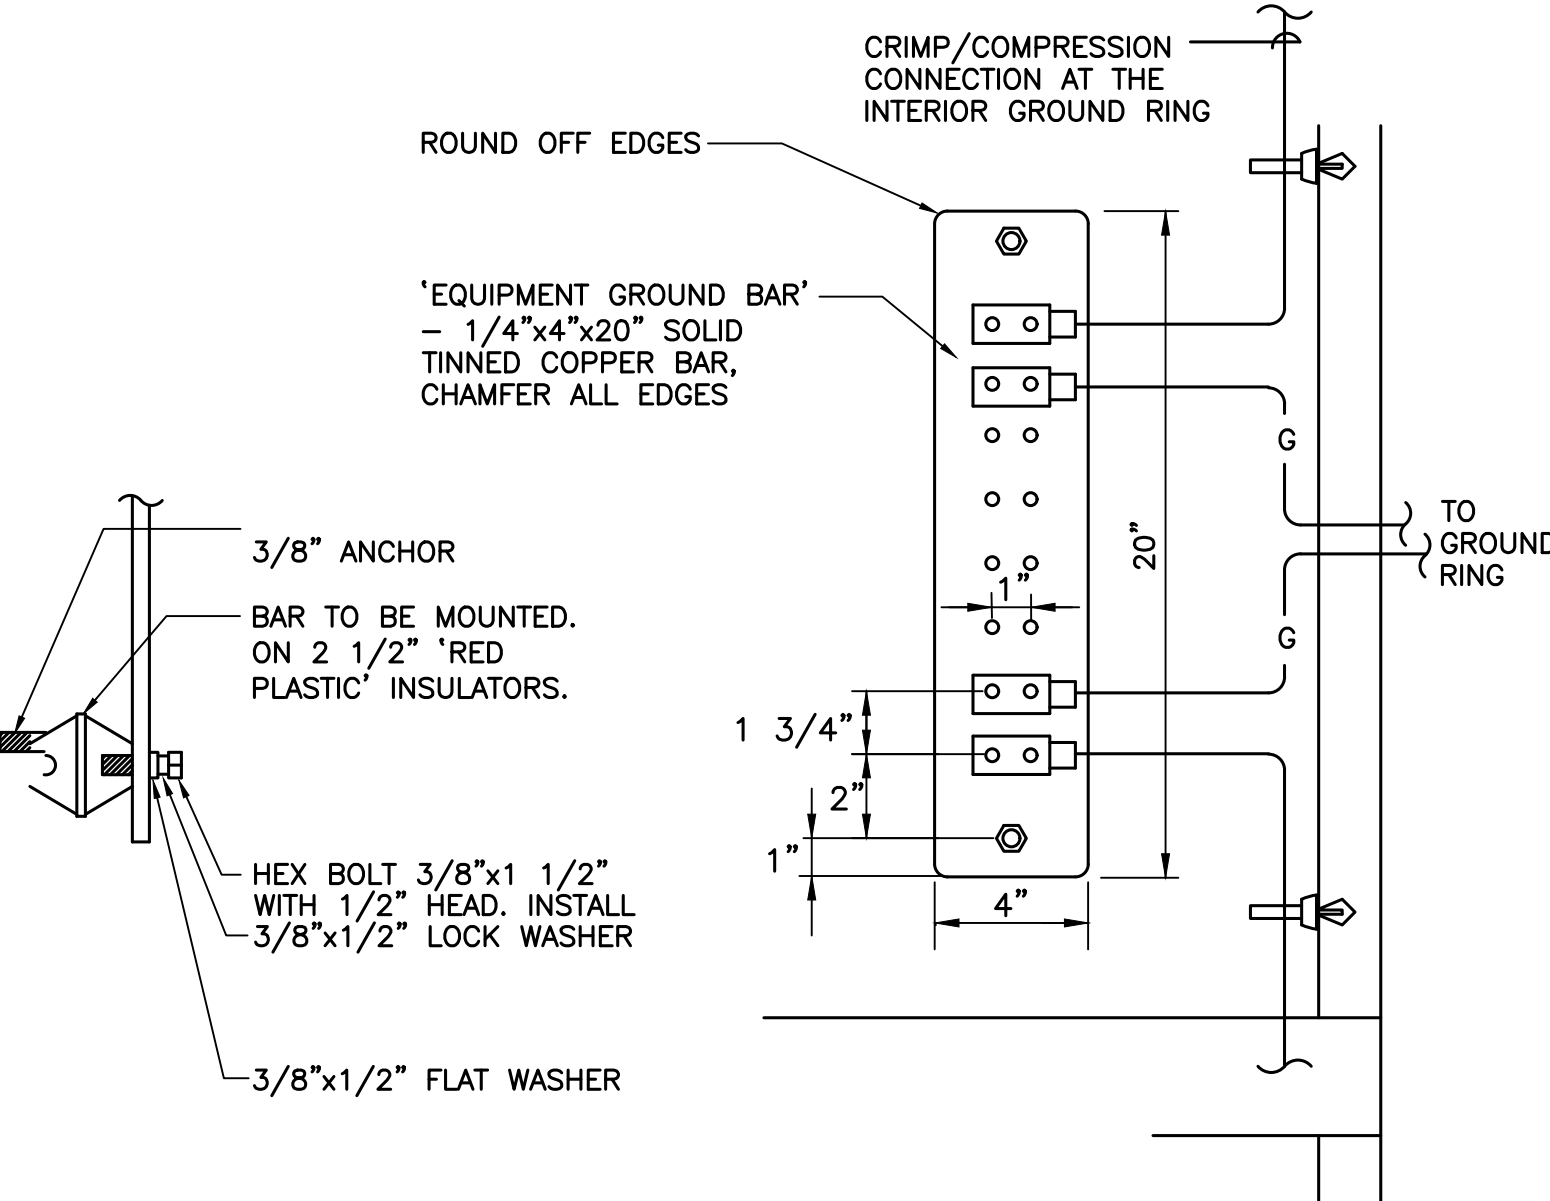

6 EQUIPMENT GROUND BAR DETAIL
E-2 SCALE: NOT TO SCALE

REV.	DATE	BY	CHK'D BY	DESCRIPTION
2	12/20/21	RTS	TJR	CONSTRUCTION DRAWINGS - REVISED PER UPDATED SA
1	10/12/21	RTS	TJR	CONSTRUCTION DRAWINGS - REVISED PER NEW RFDS
0	08/24/21	RTS	TJR	CONSTRUCTION DRAWINGS - ISSUED FOR CONSTRUCTION

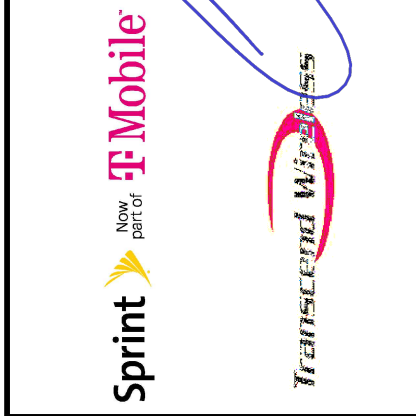

CENTEK engineering
Centered on solutions™
(203) 488-0580
(203) 488-6567 Fax
63-2 North Branford Road
Branford, CT 06405
www.CentekEng.com

T-MOBILE NORTHEAST LLC
SPRINT ID: CT33XC004
SITE ID: CTHA826A
9 SOUTH ROAD
STAFFORD SPRINGS, CT 06077

DATE: 05/28/21
SCALE: AS NOTED
JOB NO. 21005.31

TYPICAL ELECTRICAL DETAILS

E-2
Sheet No. 9 of 10

ELECTRICAL SPECIFICATIONS

SECTION 16010

1.01. SCOPE OF WORK

- A. WORK SHALL INCLUDE ALL LABOR, EQUIPMENT AND SERVICES REQUIRED TO COMPLETE (MAKE READY FOR OPERATION) ALL THE ELECTRICAL WORK INCLUDING, BUT NOT LIMITED TO, THE FOLLOWING:
1. INSTALL 150A, 2 POLE CIRCUIT BREAKER TO SERVE NEW EQUIPMENT
2. EXISTING 100A CIRCUIT BREAKER TO BE REMOVED
3. FEEDERS AND BRANCH CIRCUIT WIRING TO PANELS AND EQUIPMENT AS INDICATED OR NOTED ON PLANS.
4. FIELD MEASURE EXISTING ELECTRICAL SERVICES TO CONFIRM AVAILABLE EXISTING POWER.

1.02. GENERAL REQUIREMENTS

- A. THE ENTIRE ELECTRICAL INSTALLATION SHALL BE MADE IN STRICT ACCORDANCE WITH ALL LOCAL, STATE AND NATIONAL CODES AND REGULATIONS WHICH MAY APPLY AND NOTHING IN THE DRAWINGS OR SPECIFICATIONS SHALL BE INTERPRETED AS AN INFRINGEMENT OF SUCH CODES OR REGULATIONS.
B. THE ELECTRICAL CONTRACTOR IS TO BE RESPONSIBLE FOR THE COMPLETE INSTALLATION AND COORDINATION OF THE ENTIRE ELECTRICAL SERVICE. ALL ACTIVITIES TO BE COORDINATED THROUGH OWNERS REPRESENTATIVE, DESIGN ENGINEER AND OTHER AUTHORITIES HAVING JURISDICTION OF TRADES.
C. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL PERMITS AND PAY ALL FEES THAT MAY BE REQUIRED FOR THE ELECTRICAL WORK AND FOR THE SCHEDULING OF ALL INSPECTIONS THAT MAY BE REQUIRED BY THE LOCAL AUTHORITY.
D. THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATION WITH THE BUILDING OWNER FOR NEW AND/OR DEMOLITION WORK INVOLVED.
E. NO MATERIAL OTHER THAN THAT CONTAINED IN THE "LATEST LIST OF ELECTRICAL FITTINGS" APPROVED BY THE UNDERWRITERS' LABORATORIES, SHALL BE USED IN ANY PART OF THE WORK. ALL MATERIAL FOR WHICH LABEL SERVICE HAS BEEN ESTABLISHED SHALL BEAR THE U.L. LABEL.
F. THE CONTRACTOR SHALL GUARANTEE ALL NEW WORK FOR A PERIOD OF ONE YEAR FROM THE ACCEPTANCE DATE BY THE OWNER. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING WARRANTIES FROM ALL EQUIPMENT MANUFACTURERS FOR SUBMISSION TO THE OWNER.
G. DRAWINGS INDICATE GENERAL ARRANGEMENT OF WORK INCLUDED IN CONTRACT. CONTRACTOR SHALL, WITHOUT EXTRA CHARGE, MAKE MODIFICATIONS TO THE LAYOUT OF THE WORK TO PREVENT CONFLICT WITH WORK OF OTHER TRADES AND FOR THE PROPER INSTALLATION OF WORK. CHECK ALL DRAWINGS AND VISIT JOB SITE TO VERIFY SPACE AND TYPE OF EXISTING CONDITIONS IN WHICH WORK WILL BE DONE, PRIOR TO SUBMITTAL OF BID.
H. THE ELECTRICAL CONTRACTOR SHALL SUPPLY THREE (3) COMPLETE SETS OF APPROVED DRAWINGS, ENGINEERING DATA SHEETS, MAINTENANCE AND OPERATING INSTRUCTION MANUALS FOR ALL SYSTEMS AND THEIR RESPECTIVE EQUIPMENT. THESE MANUALS SHALL BE INSERTED IN VINYL COVERED 3-RING BINDERS AND TURNED OVER TO OWNER'S REPRESENTATIVE ONE (1) WEEK PRIOR TO FINAL PUNCH LIST.
I. ALL WORK SHALL BE INSTALLED IN A NEAT AND WORKMAN LIKE MANNER AND WILL BE SUBJECT TO THE APPROVAL OF THE OWNER'S REPRESENTATIVE.
J. ALL EQUIPMENT AND MATERIALS TO BE INSTALLED SHALL BE NEW, UNLESS OTHERWISE NOTED.
K. BEFORE FINAL PAYMENT, THE CONTRACTOR SHALL PROVIDE A COMPLETE SET OF PRINTS (AS-BUILTS), LEGIBLY MARKED IN RED PENCIL TO SHOW ALL CHANGES FROM THE ORIGINAL PLANS.
L. PROVIDE TEMPORARY POWER AND LIGHTING IN WORK AREAS AS REQUIRED.
M. SHOP DRAWINGS:
1. CONTRACTOR SHALL SUBMIT SIX (6) COPIES OF SHOP DRAWINGS ON ALL EQUIPMENT AND MATERIALS PROPOSED FOR USE ON THIS PROJECT, GIVING ALL DETAILS, WHICH INCLUDE DIMENSIONS, CAPACITIES, ETC.
2. CONTRACTOR SHALL SUBMIT SIX (6) COPIES OF ALL TEST REPORTS CALLED FOR IN THE SPECIFICATIONS AND DRAWINGS.
N. ENTIRE ELECTRICAL INSTALLATION SHALL BE IN ACCORDANCE WITH OWNER'S SPECIFICATIONS, AND REQUIREMENTS OF ALL LOCAL AUTHORITIES HAVING JURISDICTION. IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE WITH APPROPRIATE INDIVIDUALS TO OBTAIN ALL SUCH SPECIFICATIONS AND REQUIREMENTS. NOTHING CONTAINED IN, OR OMITTED FROM, THESE DOCUMENTS SHALL RELIEVE CONTRACTOR FROM THIS OBLIGATION.

SECTION 16111

1.01. CONDUIT

- A. MINIMUM CONDUIT SIZE FOR BRANCH CIRCUITS, LOW VOLTAGE CONTROL AND ALARM CIRCUITS SHALL BE 3/4". CONDUITS SHALL BE PROPERLY FASTENED AS REQUIRED BY THE N.E.C.
B. THE INTERIOR OF RACEWAYS/ENCLOSURES INSTALLED UNDERGROUND SHALL BE CONSIDERED TO BE WET LOCATION, INSULATED CONDUCTORS SHALL BE LISTED FOR USE IN WET LOCATIONS. PROVIDE WEATHERPROOF CONSTRUCTION IN WET LOCATIONS.
C. CONDUIT INSTALLED UNDERGROUND SHALL BE INSTALLED TO MEET MINIMUM COVER REQUIREMENTS OF TABLE 300.5.
D. PROVIDE RIGID GALVANIZED STEEL CONDUIT (RMC) FOR THE FIRST 10 FOOT SECTION WHEN LEAVING A BUILDING OR SECTIONS PASSING THROUGH FLOOR SLABS
E. ONLY LISTED PVC CONDUIT AND FITTINGS ARE PERMITTED FOR THE INSTALLATION OF ELECTRICAL CONDUCTORS, SUITABLE FOR UNDERGROUND APPLICATIONS.

CONDUIT SCHEDULE SECTION 16111

Table with 4 columns: CONDUIT TYPE, NEC REFERENCE, APPLICATION, MIN. BURIAL DEPTH (PER NEC TABLE 300.5) 2,3. Rows include EMT, RMC, RIGID GALV. STEEL, PVC, SCHEDULE 40, PVC, SCHEDULE 80, LIQUID TIGHT FLEX. METAL, FLEX. METAL.

1 PHYSICAL DAMAGE IS SUBJECT TO THE AUTHORITY HAVING JURISDICTION.
2 UNDERGROUND CONDUIT INSTALLED UNDER ROADS, HIGHWAYS, DRIVEWAYS, PARKING LOTS SHALL HAVE MINIMUM DEPTH OF 24".
3 WHERE SOLID ROCK PREVENTS COMPLIANCE WITH MINIMUM COVER DEPTHS, WIRING SHALL BE INSTALLED IN PERMITTED RACEWAY FOR DIRECT BURIAL. THE RACEWAY SHALL BE COVERED BY A MINIMUM OF 2" OF CONCRETE EXTENDING DOWN TO ROCK.

SECTION 16123

1.01. CONDUCTORS

- A. ALL CONDUCTORS SHALL BE TYPE THWN (INT. APPLICATION) AND XHHW (EXT. APPLICATION), 75 DEGREE C, 600 VOLT INSULATION, SOFT ANNEALED STRANDED COPPER. #10 AWG AND SMALLER SHALL BE SPLICED USING ACCEPTABLE SOLDERLESS PRESSURE CONNECTORS. #8 AWG AND LARGER SHALL BE SPLICED USING COMPRESSION SPLIT-BOLT TYPE CONNECTORS. #12 AWG SHALL BE THE MINIMUM SIZE CONDUCTOR FOR LINE VOLTAGE BRANCH CIRCUITS. REFER TO PANEL SCHEDULE FOR BRANCH CIRCUIT CONDUCTOR SIZE(S). CONDUCTORS SHALL BE COLOR CODED FOR CONSISTENT PHASE IDENTIFICATION:
LINE COLOR
A BLACK
B RED
C BLUE
N CONTINUOUS WHITE
G CONTINUOUS GREEN
277/480V COLOR BROWN
ORANGE
YELLOW
GREY
GREEN WITH YELLOW STRIPE
B. MINIMUM BENDING RADIUS FOR CONDUCTORS SHALL BE 12 TIMES THE LARGEST DIAMETER OF BRANCH CIRCUIT CONDUCTOR.

SECTION 16130

1.01. BOXES

- A. FURNISH AND INSTALL OUTLET BOXES FOR ALL DEVICES, SWITCHES, RECEPTACLES, ETC.. BOXES TO BE ZINC COATED STEEL.
B. FURNISH AND INSTALL PULL BOXES IN MAIN FEEDERS RUNS WHERE REQUIRED. PULL BOXES SHALL BE GALVANIZED STEEL WITH SCREW REMOVABLE COVERS, SIZE AND QUANTITY AS REQUIRED. PROVIDE WEATHERPROOF CONSTRUCTION IN WET LOCATIONS.

SECTION 16140

1.01. WIRING DEVICES

- A. THE FOLLOWING LIST IS PROVIDED TO CONVEY THE QUALITY AND RATING OF WIRING DEVICES WHICH ARE TO BE INSTALLED. A COMPLETE LIST OF ALL DEVICES MUST BE SUBMITTED BEFORE INSTALLATION FOR APPROVAL.
1. 15 MINUTE TIMER SWITCH - INTERMATIC #FF15M (INTERIOR LIGHTS)
2. DUPLEX RECEPTACLE - P&S #2095 (GFCI) SPECIFICATION GRADE
3. SINGLE POLE SWITCH - P&S #CSB20AC2 (20A-120V HARD USE) SPECIFICATION GRADE
4. DUPLEX RECEPTACLE - P&S #5362 (20A-120V HARD USE) SPECIFICATION GRADE
B. PLATES - ALL PLATES USED SHALL BE CORROSION RESISTANT TYPE 304 STAINLESS STEEL. PLATES SHALL BE FROM SAME MANUFACTURER AS SWITCHES AND RECEPTACLES. PROVIDE WEATHERPROOF HOUSING FOR DEVICES LOCATED IN WET LOCATIONS.
C. OTHER MANUFACTURERS OF THE SWITCHES, RECEPTACLES AND PLATES MAY BE SUBMITTED FOR APPROVAL BY THE ENGINEER.

SECTION 16190

1.01. SEISMIC RESTRAINT

- A. ALL DEVICES SHALL BE INSTALLED IN ACCORDANCE WITH ZONE 2 SEISMIC REQUIREMENTS.

SECTION 16195

1.01. LABELING AND IDENTIFICATION NOMENCLATURE FOR ELECTRICAL EQUIPMENT

- A. CONTRACTOR SHALL FURNISH AND INSTALL NON-METALLIC ENGRAVED BACK-LIT NAMEPLATES ON ALL PANELS AND MAJOR ITEMS OF ELECTRICAL EQUIPMENT.
B. LETTERS TO BE WHITE ON BLACK BACKGROUND WITH LETTERS 1-1/2 INCH HIGH WITH 1/4 INCH MARGIN.
C. IDENTIFICATION NOMENCLATURE SHALL BE IN ACCORDANCE WITH OWNER'S STANDARDS.

SECTION 16450

1.01. GROUNDING

- A. ALL NON-CURRENT CARRYING PARTS OF THE ELECTRICAL AND TELEPHONE CONDUIT SYSTEMS SHALL BE MECHANICALLY AND ELECTRICALLY CONNECTED TO PROVIDE AN INDEPENDENT RETURN PATH TO THE EQUIPMENT GROUNDING SOURCES.
B. GROUNDING SYSTEM WILL BE IN ACCORDANCE WITH THE LATEST ACCEPTABLE EDITION OF THE NATIONAL ELECTRICAL CODE AND REQUIREMENTS PER LOCAL INSPECTOR HAVING JURISDICTION.
C. GROUNDING OF PANELBOARDS:
1. PANELBOARD SHALL BE GROUNDED BY TERMINATING THE PANELBOARD FEEDER'S EQUIPMENT GROUND CONDUCTOR TO THE EQUIPMENT GROUND BAR KIT(S) LUGGED TO THE CABINET. ENSURE THAT THE SURFACE BETWEEN THE KIT AND CABINET ARE BARE METAL TO BARE METAL. PRIME AND PAINT OVER TO PREVENT CORROSION.
2. CONDUIT(S) TERMINATING INTO THE PANELBOARD SHALL HAVE GROUNDING TYPE BUSHINGS. THE BUSHINGS SHALL BE BONDED TOGETHER WITH BARE #10 AWG COPPER CONDUCTOR WHICH IN TURN IS TERMINATED INTO THE PANELBOARD'S EQUIPMENT GROUND BAR KIT(S).
D. EQUIPMENT GROUNDING CONDUCTOR:
1. EACH EQUIPMENT GROUND CONDUCTOR SHALL BE SIZED IN ACCORDANCE WITH THE N.E.C. ARTICLE 250-122.
2. THE MINIMUM SIZE OF EQUIPMENT GROUND CONDUCTOR SHALL BE #12 AWG COPPER.
3. EACH FEEDER OR BRANCH CIRCUIT SHALL HAVE EQUIPMENT GROUND CONDUCTOR(S) INSTALLED IN THE SAME RACEWAY(S).
E. CELLULAR GROUNDING SYSTEM:
CONTRACTOR SHALL PROVIDE A CELLULAR GROUNDING SYSTEM WITH THE MAXIMUM AC RESISTANCE TO GROUND OF 10 OHM BETWEEN ANY POINT ON THE GROUNDING SYSTEM AS MEASURED BY 3-POINT GROUNDING TEST. (REFER TO SECTION 16960).
PROVIDE THE CELLULAR GROUNDING SYSTEM AS SPECIFIED ON DRAWINGS, INCLUDING, BUT NOT LIMITED TO:
1. GROUND BARS
2. EXTERIOR GROUNDING (WHERE REQUIRED DUE TO MEASURED AC RESISTANCE GREATER THAN SPECIFIED).
3. ANTENNA GROUND CONNECTIONS AND PLATES.
F. CONTRACTOR, AFTER COMPLETION OF THE COMPLETE GROUNDING SYSTEM BUT PRIOR TO CONCEALMENT/BURIAL OF SAME, SHALL NOTIFY OWNER'S PROJECT ENGINEER WHO WILL HAVE A DESIGN ENGINEER VISIT SITE AND MAKE A VISUAL INSPECTION OF THE GROUNDING GRID AND CONNECTIONS OF THE SYSTEM.
G. ALL EQUIPMENT SHALL BE BONDED TO GROUND AS REQUIRED BY N.E.C., MFG. SPECIFICATIONS, AND OWNER'S SPECIFICATIONS.

SECTION 16477

1.01. FUSES

- A. FUSES SHALL BE NONRENEWABLE TYPE AS MANUFACTURED BY "BUSSMAN" OR APPROVED EQUAL FUSES RATED TO 1/10 AMPERE UP TO 600 AMPERES SHALL BE EQUIVALENT TO BUSSMAN TYPE LPN-RK (250V) UL CLASS RK1, LOW PEAK, DUAL ELEMENT, TIME-DELAY FUSES. FUSES SHALL HAVE SEPARATE SHORT CIRCUIT AND OVERLOAD ELEMENTS AND HAVE AN INTERRUPTING RATING OF 200 KAIC. UPON COMPLETION OF WORK, PROVIDE ONE SPARE SET OF FUSES FOR EACH TYPE INSTALLED.

SECTION 16960

1.01. TESTS BY INDEPENDENT ELECTRICAL TESTING FIRM

- A. CONTRACTOR SHALL RETAIN THE SERVICES OF A LOCAL INDEPENDENT ELECTRICAL TESTING FIRM (WITH MINIMUM 5 YEARS COMMERCIAL EXPERIENCE IN THE ELECTRICAL TESTING INDUSTRY) AS SPECIFIED BY OWNER TO PERFORM:
TEST 1: THERMAL OVERLOAD AND MAGNETIC TRIP TEST, AND CABLE INSULATION TEST FOR ALL CIRCUIT BREAKERS RATED 100 AMPS OR GREATER.
TEST 2: RESISTANCE TO GROUND TEST ON THE CELLULAR GROUNDING SYSTEM.
THE TESTING FIRM SHALL INCLUDE THE FOLLOWING INFORMATION WITH THE REPORT:
1. TESTING PROCEDURE INCLUDING THE MAKE AND MODEL OF TEST EQUIPMENT.
2. CERTIFICATION OF TESTING EQUIPMENT CALIBRATION WITHIN SIX (6) MONTHS OF DATE OF TESTING. INCLUDE CERTIFICATION LAB ADDRESS AND TELEPHONE NUMBER.
3. GRAPHICAL DESCRIPTION OF TESTING METHOD ACTUALLY IMPLEMENTED.
B. THESE TESTS SHALL BE PERFORMED IN THE PRESENCE AND TO THE SATISFACTION OF OWNER'S CONSTRUCTION REPRESENTATIVE. TESTING DATA SHALL BE INITIALED AND DATED BY THE CONSTRUCTION REPRESENTATIVE AND INCLUDED WITH THE WRITTEN REPORT/ANALYSIS.
C. THE CONTRACTOR SHALL FORWARD SIX (6) COPIES OF THE INDEPENDENT ELECTRICAL TESTING FIRM'S REPORT/ANALYSIS TO ENGINEER A MINIMUM OF TEN (10) WORKING DAYS PRIOR TO THE JOB TURNOVER.
D. CONTRACTOR TO PROVIDE A MINIMUM OF ONE (1) WEEK NOTICE TO OWNER AND ENGINEER FOR ALL TESTS REQUIRING WITNESSING.

SECTION 16961

1.01. TESTS BY CONTRACTOR

- A. ALL TESTS AS REQUIRED UPON COMPLETION OF WORK, SHALL BE MADE BY THIS CONTRACTOR. THESE SHALL BE CONTINUITY AND INSULATION TESTS; TEST TO DETERMINE THE QUALITY OF MATERIALS, ETC. AND SHALL BE MADE IN ACCORDANCE WITH N.E.C. RECOMMENDATIONS. ALL FEEDERS AND BRANCH CIRCUIT WIRING (EXCEPT CLASS 2 SIGNAL CIRCUITS) MUST BE TESTED FREE FROM SHORT CIRCUIT AND GROUND FAULT CONDITIONS AT 500V IN A REASONABLY DRY AMBIENT OF APPROXIMATELY 70 DEGREES F.
B. CONTRACTOR SHALL PERFORM LOAD PHASE BALANCING TESTS. CIRCUITS SHALL BE SO CONNECTED TO THE PANELBOARDS SUCH THAT THE NEW LOAD IS DISTRIBUTED AS EQUALLY AS POSSIBLE BETWEEN EACH LOAD AND NEUTRAL. 10% SHALL BE CONSIDERED AS A REASONABLE AND ACCEPTABLE ALLOWANCE. BRANCH CIRCUITS SHALL BE BALANCED ON THEIR OWN PANELBOARDS; FEEDER LOADS SHALL, IN TURN, BE BALANCED ON THE SERVICE EQUIPMENT. REASONABLE LOAD TEST SHALL BE ARRANGED TO VERIFY LOAD BALANCE IF REQUESTED BY THE ENGINEER.
C. ALL TESTS, UPON REQUEST, SHALL BE REPEATED IN THE PRESENCE OF OWNER'S REPRESENTATIVE. ALL TESTS SHALL BE DOCUMENTED AND TURNED OVER TO OWNER. OWNER SHALL HAVE THE AUTHORITY TO STOP ANY OF THE WORK NOT BEING PROPERLY INSTALLED. ALL SUCH DETECTED WORK SHALL BE REPAIRED OR REPLACED AT NO ADDITIONAL EXPENSE TO THE OWNER AND THE TESTS SHALL BE REPEATED.

Professional Engineer Seal, logos for Sprint, T-Mobile, and Centek Engineering, project information: T-MOBILE NORTHEAST LLC, SPRINT ID: CT33XC004, SITE ID: CTHA826A, 9 SOUTH ROAD, STAFFORD SPRINGS, CT 06077, Date: 05/28/21, Scale: AS NOTED, Job No: 21005.31, ELECTRICAL SPECIFICATIONS, E-3, Sheet No. 10 of 10.

Report Date: December 9, 2021

Client: Everest Infrastructure Partners
Two Allegheny Center
Pittsburgh, PA 15212
Attn: Thomas Rigg
(603) 498-7462
tom.rigg@everestinfrastructure.com

Structure: Existing 180-ft Guyed Tower
Site Name: Stafford 2
Site Reference #: 702496
Site Address: 33 South Road
City, County, State: Stafford, Tolland County, CT
Latitude, Longitude: 41.96855°, -72.238161°

PJF Project: A13321-0014.003.8300

Paul J. Ford and Company is pleased to submit this “**Structural Opinion Letter**” to determine the structural integrity of the above-mentioned tower.

Analysis Criteria:

This analysis utilizes an ultimate 3-second gust wind speed of 124 mph (converted to an equivalent 96 mph nominal 3-second gust wind speed per Section 1609.3.1 for use with TIA-222 G) as required by the 2018 Connecticut State Building Code and Appendix N. Applicable Standard references and design criteria are listed in Section 2 - Analysis Criteria.

The purpose of this opinion letter is to determine the suitability of the tower structure to support the proposed equipment configuration listed in Table 1.

Based on a comparison of the previous analysis loads (Previous Structural Analysis: PJF# 13321-0014.002.8700 dated September 14, 2021), with the addition of the proposed equipment, we have determined that the tower structure and foundation are **SUFFICIENT**. The addition of the proposed equipment configuration listed in Table 1 is acceptable.


Table 1 - Proposed Antenna and Cable Information

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
180.0	180.0	3	ericsson	AIR6449 B41 w/ Mount Pipe	3	1 5/8
		3	ericsson	RADIO 4460 B25+B66		
		3	ericsson	RADIO 4480 B71+B85		
		3	rfs celwave	APXVAARR24_43-U-NA20 w/ Mount Pipe		
		3	commscope	VV-65A-R1 w/ Mount Pipe		
		1	tower mounts	Platform Mount [LP 302-1]		

We at Paul J. Ford and Company appreciate the opportunity of providing our continuing professional services to you and Everest Infrastructure Partners. If you have any questions or need further assistance on this or any other projects, please give us a call.

Respectfully Submitted by:
Paul J. Ford and Company


Christina Hedges, PE
Project Manager
chedges@pauljford.com

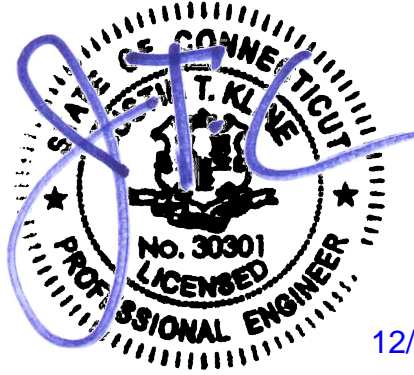

12/09/2021

Report Date: September 14, 2021

Client: Everest Infrastructure Partners
Two Allegheny Center
Pittsburgh, PA 15212
Attn: Thomas Rigg
(603) 498-7462
tom.rigg@everestinfrastructure.com

Structure: Existing 180-ft Guyed Tower
Site Name: Stafford 2
Site Reference #: 702496
Site Address: 33 South Road
City, County, State: Stafford, Tolland County, CT
Latitude, Longitude: 41.96855°, -72.238161°

PJF Project: A13321-0014.002.8700

Paul J. Ford and Company is pleased to submit this “**Structural Analysis Report**” to determine the tower stress level.

Analysis Criteria:

This analysis utilizes an ultimate 3-second gust wind speed of 124 mph (converted to an equivalent 96 mph nominal 3-second gust wind speed per Section 1609.3.1 for use with TIA-222 G) as required by the 2018 Connecticut State Building Code and Appendix N. Applicable Standard references and design criteria are listed in Section 2 - Analysis Criteria.

Proposed Appurtenance Loads:

The structure was analyzed with the addition of the proposed appurtenance loads shown in Table 1 combined with the existing and reserved loads shown in Table 2 of this report.

Summary of Analysis Results:

Existing Structure: Pass – 93.9%
Existing Foundation: Pass – 57.5%

We at Paul J. Ford and Company appreciate the opportunity of providing our continuing professional services to you and Everest Infrastructure Partners. If you have any questions or need further assistance on this or any other projects, please give us a call.

Respectfully Submitted by:
Paul J. Ford and Company


Christina Hedges, PE
Project Manager
chedges@pauljford.com AKT

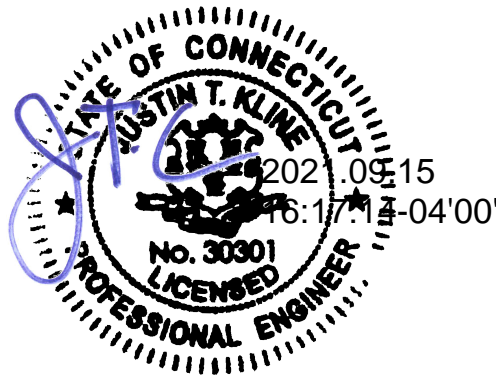


TABLE OF CONTENTS

1) INTRODUCTION

2) ANALYSIS CRITERIA

Table 1 - Proposed Antenna and Cable Information

Table 2 - Existing and Reserved Antenna and Cable Information

3) ANALYSIS PROCEDURE

Table 3 - Documents Provided

3.1) Analysis Method

3.2) Assumptions

4) ANALYSIS RESULTS

Table 4 - Section Capacity (Summary)

Table 5 - Tower Component Stresses vs. Capacity

5) APPENDIX A

tnxTower Output

6) APPENDIX B

Base Level Drawing

7) APPENDIX C

Additional Calculations

1) INTRODUCTION

This tower is a 180 ft Guyed tower designed by Nudd in September of 1999.

2) ANALYSIS CRITERIA

TIA-222 Revision:	TIA-222-G
Risk Category:	II
Wind Speed:	96 mph
Exposure Category:	C
Topographic Factor:	1
Ice Thickness:	1 in
Wind Speed with Ice:	50 mph
Service Wind Speed:	60 mph

Table 1 - Proposed Antenna and Cable Information

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)
180.0	180.0	3	ericsson	AIR6449 B41 w/ Mount Pipe	3	1 5/8
		3	ericsson	RADIO 4460 B25+B66		
		3	ericsson	RADIO 4480 B71+B85		
		3	rfs celwave	APXVAARR24_43-U-NA20 w/ Mount Pipe		
		3	rfs celwave	APX16DWV-16DWV-S-E-A20 w/ Mount Pipe		

Table 2 - Existing and Reserved Antenna and Cable Information

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note
180.0	180.0	6	alcatel lucent	RRH2X50-800	4	1 1/4	2
		3	alcatel lucent	RRH4x45-AWS			
		3	alcatel lucent	TD-RRH8x20-25			
		3	rfs celwave	APXV9ERR18-C-A20 w/ Mount Pipe			
		3	commscope	DT465B-2XR w/ Mount Pipe			
		1	tower mounts	Platform Mount [LP 302-1]			1
170.0	170.0	1	tower mounts	Sector Mount [SM 803-3]			1
150.0	150.0	1	andrew	SBNHH-1D65A w/ Mount Pipe	6 1 2	1 1/4 Fiber Power	1
		2	cci antennas	HPA-65R-BUU-H8 w/ Mount Pipe			
		3	ericsson	RRU-11			
		3	ericsson	RRUS 32 B2			
		3	kathrein	800 10121 w/ Mount Pipe			
		6	powerwave tech	LGP21401			
		1	raycap	DC6-48-60-18-8C			
		1	tower mounts	Sector Mount [SM 802-3]			
1	tower mounts	Side Arm Mount [SO 601-3]					

Mounting Level (ft)	Center Line Elevation (ft)	Number of Antennas	Antenna Manufacturer	Antenna Model	Number of Feed Lines	Feed Line Size (in)	Note
140.0	140.0	3	alcatel lucent	RRH2X40-07-L	2	6x12 Hybrid	2
		3	alcatel lucent	RRH2X40-AWS			
		6	antel	BXA-171063/12CF w/ Mount Pipe			
		3	antel	BXA-70063/6CF w/ Mount Pipe			
		1	rfs celwave	DB-T1-6Z-8AB-0Z			
		3	commscope	BSAMNT-SBS-1-2 (Mount Bracket)	2	6x12 Hybrid	3
		6	commscope	NHH-65B-R2B w/ Mount Pipe			
		2	rfs celwave	DB-B1-6C-12AB-0Z			
		3	samsung telecommunications	B2/B66A RRH-BR049			
		3	samsung telecommunications	B5/B13 RRH-BR04C			
		3	samsung telecommunications	MT6407-77A w/ Mount Pipe	15	1 5/8	1
		3	antel	BXA-70063/6CF w/ Mount Pipe			
		1	tower mounts	Sector Mount [SM 802-3]			
		1	tower mounts	Side Arm Mount [SO 601-3]			

Notes:

- 1) Existing Equipment
- 2) Equipment To Be Removed
- 3) Future Equipment

3) ANALYSIS PROCEDURE

Table 3 - Documents Provided

Document	Remarks	Reference
Original Tower and Foundation Drawings	Nudd, 9/3/99	99-7063
Structural Analysis/Past Loading	Nudd, 4/21/18	118-23036
Geotechnical Report	TEP, 9/10/2021	248791.587053

3.1) Analysis Method

tnxTower (version 8.1.1.0), a commercially available analysis software package, was used to create a three-dimensional model of the tower and calculate member stresses for various loading cases. Selected output from the analysis is included in Appendix A.

3.2) Assumptions

- 1) Tower and structures were maintained in accordance with the TIA-222 Standard.
- 2) The configuration of antennas, transmission cables, mounts and other appurtenances are as specified in Tables 1 and 2 and the referenced drawings.

This analysis may be affected if any assumptions are not valid or have been made in error. Paul J. Ford and Company should be notified to determine the effect on the structural integrity of the tower.

4) ANALYSIS RESULTS

Table 4 - Section Capacity (Summary)

Section No.	Elevation (ft)	Component Type	Size	Critical Element	P (K)	SF*P_allow (K)	% Capacity	Pass / Fail
T1	180 - 160	Leg	P2.875"x0.203" (2.5 STD)	1	-28.18	73.73	38.2	Pass
T2	160 - 140	Leg	P2.875"x0.203" (2.5 STD)	61	-37.52	73.73	50.9	Pass
T3	140 - 120	Leg	P2.875"x0.203" (2.5 STD)	123	-41.39	73.73	56.1	Pass
T4	120 - 100	Leg	P2.875"x0.203" (2.5 STD)	183	-51.81	73.73	70.3	Pass
T5	100 - 80	Leg	P2.875"x0.203" (2.5 STD)	241	-53.26	73.73	72.2	Pass
T6	80 - 60	Leg	P2.875"x0.203" (2.5 STD)	302	-55.67	73.73	75.5	Pass
T7	60 - 40	Leg	P2.875"x0.203" (2.5 STD)	362	-63.29	73.73	85.8	Pass
T8	40 - 20	Leg	P2.875"x0.203" (2.5 STD)	422	-67.30	73.73	91.3	Pass
T9	20 - 5	Leg	P2.875"x0.203" (2.5 STD)	482	-67.04	71.40	93.9	Pass
T10	5 - 0	Leg	P2.875"x0.203" (2.5 STD)	524	-69.36	81.70	84.9	Pass
T1	180 - 160	Diagonal	5/8" solid	12	4.36	9.94	43.9	Pass
T2	160 - 140	Diagonal	5/8" solid	117	4.16	9.94	41.8	Pass
T3	140 - 120	Diagonal	5/8" solid	133	6.94	9.94	69.8	Pass
T4	120 - 100	Diagonal	5/8" solid	229	2.89	9.94	29.0	Pass
T5	100 - 80	Diagonal	5/8" solid	298	1.74	9.94	17.5	Pass
T6	80 - 60	Diagonal	5/8" solid	314	2.21	9.94	22.2	Pass
T7	60 - 40	Diagonal	5/8" solid	410	2.66	9.94	26.8	Pass
T8	40 - 20	Diagonal	5/8" solid	479	1.42	9.94	14.3	Pass
T9	20 - 5	Diagonal	5/8" solid	492	1.76	9.94	17.7	Pass
T10	5 - 0	Diagonal	5/8" solid	553	0.61	9.94	6.2	Pass
T1	180 - 160	Horizontal	L 1.5 x 1.5 x 3/16	36	-3.40	7.19	47.2	Pass
T2	160 - 140	Horizontal	L 1.5 x 1.5 x 3/16	113	-2.77	7.19	38.5	Pass
T3	140 - 120	Horizontal	L 1.5 x 1.5 x 3/16	137	-4.74	7.19	65.9	Pass
T4	120 - 100	Horizontal	L 1.5 x 1.5 x 3/16	232	-2.40	7.19	33.4	Pass
T5	100 - 80	Horizontal	L 1.5 x 1.5 x 3/16	293	-1.12	7.19	15.5	Pass
T6	80 - 60	Horizontal	L 1.5 x 1.5 x 3/16	318	-1.52	7.19	21.1	Pass
T7	60 - 40	Horizontal	L 1.5 x 1.5 x 3/16	405	-1.83	7.19	25.5	Pass
T8	40 - 20	Horizontal	L 1.5 x 1.5 x 3/16	474	-0.87	7.19	12.1	Pass
T9	20 - 5	Horizontal	L 1.5 x 1.5 x 3/16	497	-1.13	7.19	15.7	Pass
T10	5 - 0	Horizontal	L 1.5 x 1.5 x 3/16	547	-0.29	9.86	3.0	Pass
T1	180 - 160	Top Girt	L 1.5 x 1.5 x 3/16	6	-1.82	7.19	25.3	Pass
T2	160 - 140	Top Girt	L 1.5 x 1.5 x 3/16	65	-1.66	7.19	23.1	Pass
T3	140 - 120	Top Girt	L 1.5 x 1.5 x 3/16	125	-1.81	7.19	25.1	Pass
T5	100 - 80	Top Girt	L 1.5 x 1.5 x 3/16	245	-0.74	7.19	10.3	Pass
T6	80 - 60	Top Girt	L 1.5 x 1.5 x 3/16	306	-0.33	7.19	4.6	Pass
T8	40 - 20	Top Girt	L 1.5 x 1.5 x 3/16	426	-0.53	7.19	7.4	Pass
T9	20 - 5	Top Girt	L 1.5 x 1.5 x 3/16	484	-0.38	7.19	5.3	Pass
T10	5 - 0	Top Girt	L 1.5 x 1.5 x 3/16	526	8.75	17.09	51.2	Pass
T1	180 - 160	Bottom Girt	L 1.5 x 1.5 x 3/16	8	-1.68	7.19	23.4	Pass
T2	160 - 140	Bottom Girt	L 1.5 x 1.5 x 3/16	68	-0.51	7.19	7.1	Pass
T3	140 - 120	Bottom Girt	L 1.5 x 1.5 x 3/16	128	-2.65	7.19	36.8	Pass
T4	120 - 100	Bottom Girt	L 1.5 x 1.5 x 3/16	188	-0.88	7.19	12.3	Pass

T5	100 - 80	Bottom Girt	L 1.5 x 1.5 x 3/16	249	-0.23	7.19	3.2	Pass
T6	80 - 60	Bottom Girt	L 1.5 x 1.5 x 3/16	309	-0.61	7.19	8.5	Pass
T7	60 - 40	Bottom Girt	L 1.5 x 1.5 x 3/16	369	-0.61	7.19	8.5	Pass
T8	40 - 20	Bottom Girt	L 1.5 x 1.5 x 3/16	428	-0.31	7.19	4.3	Pass
T9	20 - 5	Bottom Girt	L 1.5 x 1.5 x 3/16	487	6.19	17.09	36.2	Pass
T10	5 - 0	Bottom Girt	L 1.5 x 1.5 x 3/16	529	-1.96	14.09	13.9	Pass
T1	180 - 160	Guy A@170.063	5/8	568	12.81	25.44	50.3	Pass
T4	120 - 100	Guy A@116.521	9/16	586	10.02	21.00	47.7	Pass
T7	60 - 40	Guy A@59.75	9/16	594	9.20	21.00	43.8	Pass
T1	180 - 160	Guy B@170.063	5/8	563	12.86	25.44	50.6	Pass
T4	120 - 100	Guy B@116.521	9/16	581	9.83	21.00	46.8	Pass
T7	60 - 40	Guy B@59.75	9/16	593	9.19	21.00	43.7	Pass
T1	180 - 160	Guy C@170.063	5/8	556	12.74	25.44	50.1	Pass
T4	120 - 100	Guy C@116.521	9/16	575	10.04	21.00	47.8	Pass
T7	60 - 40	Guy C@59.75	9/16	592	9.15	21.00	43.6	Pass
T1	180 - 160	Top Guy Pull-Off@170.063	L 1.75 x 1.75 x 1/4	45	-3.36	12.76	26.3	Pass
T4	120 - 100	Top Guy Pull-Off@116.521	L 1.75 x 1.75 x 1/4	185	-2.98	12.76	23.3	Pass
T7	60 - 40	Top Guy Pull-Off@59.75	L 1.75 x 1.75 x 1/4	366	4.33	26.32	16.5	Pass
T1	180 - 160	Torque Arm Top@170.063	L 3 x 3 x 1/4	570	12.73	46.58	27.3 38.0 (b)	Pass
T4	120 - 100	Torque Arm Top@116.521	L 3 x 3 x 1/4	588	9.26	46.58	19.9 27.7 (b)	Pass
T1	180 - 160	Torque Arm Bottom@170.063	L 3 x 3 x 1/4	572	-10.51	30.52	34.4	Pass
T4	120 - 100	Torque Arm Bottom@116.521	L 3 x 3 x 1/4	585	-4.97	30.52	16.3	Pass
							Summary	
							Leg (T9)	93.9 Pass
							Diagonal (T3)	69.8 Pass
							Horizontal (T3)	65.9 Pass
							Top Girt (T10)	51.2 Pass
							Bottom Girt (T3)	36.8 Pass
							Guy A (T1)	50.3 Pass
							Guy B (T1)	50.6 Pass
							Guy C (T1)	50.1 Pass
							Top Guy Pull-Off (T1)	26.3 Pass
							Torque Arm Top (T1)	38.0 Pass
							Torque Arm Bottom (T1)	34.4 Pass
							Bolt Checks	38.0 Pass
							Rating =	93.9 Pass

Table 5 - Tower Component Stresses vs. Capacity

Notes	Component	Elevation (ft)	% Capacity	Pass / Fail
	Base Foundation (Structure)		57.5	Pass
	Base Foundation (Soil Interaction)		13.8	Pass
	Guy Anchor Shaft		57.5	Pass
	Guy Anchor Foundation Structural		47.7	Pass
	Guy Anchor Foundation Soil Interaction		54.9	Pass

Structure Rating (max from all components) =	93.9%
---	--------------

Notes:


- 1) See additional documentation in "Appendix C – Additional Calculations" for calculations supporting the % capacity consumed.
- 2) Capacities up to 105% are considered acceptable based on analysis methods used.

4.1) Recommendations

The tower and its foundation have sufficient capacity to carry the proposed load configuration. No modifications are required at this time.

APPENDIX A
TNXTOWER OUTPUT

Section		T10	T9	T8	T7	T6	T5	T4	T3	T2	T1
Legs											
Leg Grade											
Diagonals											
Diagonal Grade											
Top Girts											
Bottom Girts											
Horizontals											
Top Guy Pull-Offs											
Face Width (ft)		A	4 @ 3.59375								3.5
# Panels @ (ft)			0.5								0.9
Weight (K)			6.6								0.9

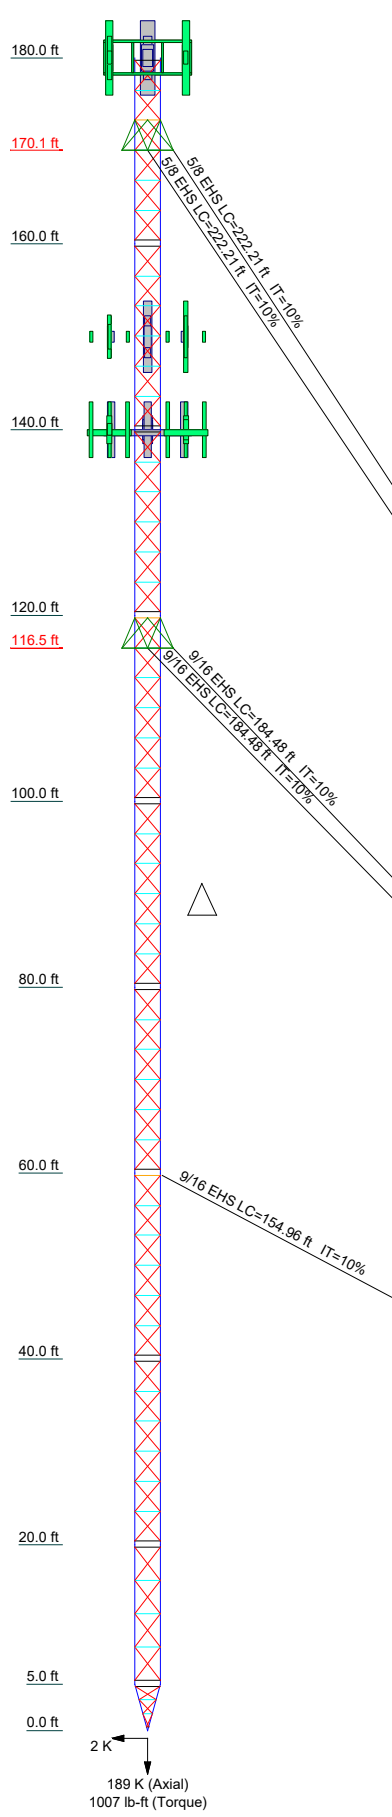


SYMBOL LIST

MARK	SIZE	MARK	SIZE
A	3 @ 1.45833		


MATERIAL STRENGTH

GRADE	Fy	Fu	GRADE	Fy	Fu
A529-55	55 ksi	70 ksi	A36	36 ksi	58 ksi

- ### TOWER DESIGN NOTES
- Tower is located in Tolland County, Connecticut.
 - Tower designed for Exposure C to the TIA-222-G Standard.
 - Tower designed for a 96 mph basic wind in accordance with the TIA-222-G Standard.
 - Tower is also designed for a 50 mph basic wind with 1.00 in ice. Ice is considered to increase in thickness with height.
 - Deflections are based upon a 60 mph wind.
 - Tower Structure Class II.
 - Topographic Category 1 with Crest Height of 0.00 ft
 - TOWER RATING: 93.9%



ALL REACTIONS ARE FACTORED

 Paul J. Ford and Company 250 E. Broad St., Ste 600 Columbus, OH 43215 Phone: 614-221-6679 FAX:	Job: Existing 190' GT Stafford, CT		
	Project: 702496 (PJF# 13321-0014)		
	Client: Everest Code: TIA-222-G Path:	Drawn by: Chrissy Hedges Date: 09/14/21	App'd: Scale: NTS Dwg No. E-1

Tower Input Data

The main tower is a 3x guyed tower with an overall height of 180.00 ft above the ground line.

The base of the tower is set at an elevation of 0.00 ft above the ground line.

The face width of the tower is 3.50 ft at the top and tapered at the base.


This tower is designed using the TIA-222-G standard.

The following design criteria apply:

- Tower is located in Tolland County, Connecticut.
- ASCE 7-10 Wind Data is used (wind speeds converted to nominal values).
- Basic wind speed of 96 mph.
- Structure Class II.
- Exposure Category C.
- Topographic Category 1.
- Crest Height 0.00 ft.
- Nominal ice thickness of 1.0000 in.
- Ice thickness is considered to increase with height.
- Ice density of 56 pcf.
- A wind speed of 50 mph is used in combination with ice.
- Temperature drop of 30 °F.
- Deflections calculated using a wind speed of 60 mph.
- Pressures are calculated at each section.
- Stress ratio used in tower member design is 1.
- Safety factor used in guy design is 1.
- Local bending stresses due to climbing loads, feed line supports, and appurtenance mounts are not considered.

Options

Consider Moments - Legs Consider Moments - Horizontals Consider Moments - Diagonals Use Moment Magnification ✓ Use Code Stress Ratios ✓ Use Code Safety Factors - Guys Escalate Ice Always Use Max Kz Use Special Wind Profile ✓ Include Bolts In Member Capacity Leg Bolts Are At Top Of Section Secondary Horizontal Braces Leg Use Diamond Inner Bracing (4 Sided) ✓ SR Members Have Cut Ends SR Members Are Concentric	Distribute Leg Loads As Uniform Assume Legs Pinned Assume Rigid Index Plate ✓ Use Clear Spans For Wind Area ✓ Use Clear Spans For KL/r ✓ Retension Guys To Initial Tension ✓ Bypass Mast Stability Checks ✓ Use Azimuth Dish Coefficients ✓ Project Wind Area of Appurt. ✓ Autocalc Torque Arm Areas Add IBC .6D+W Combination ✓ Sort Capacity Reports By Component ✓ Triangulate Diamond Inner Bracing Treat Feed Line Bundles As Cylinder Ignore KL/ry For 60 Deg. Angle Legs	Use ASCE 10 X-Brace Ly Rules Calculate Redundant Bracing Forces Ignore Redundant Members in FEA ✓ SR Leg Bolts Resist Compression All Leg Panels Have Same Allowable Offset Girt At Foundation ✓ Consider Feed Line Torque Include Angle Block Shear Check Use TIA-222-G Bracing Resist. Exemption Use TIA-222-G Tension Splice Exemption <div style="text-align: center; border: 1px solid black; padding: 2px; width: fit-content; margin: 0 auto;">Poles</div> Include Shear-Torsion Interaction Always Use Sub-Critical Flow Use Top Mounted Sockets Pole Without Linear Attachments Pole With Shroud Or No Appurtenances Outside and Inside Corner Radii Are Known
--	---	--

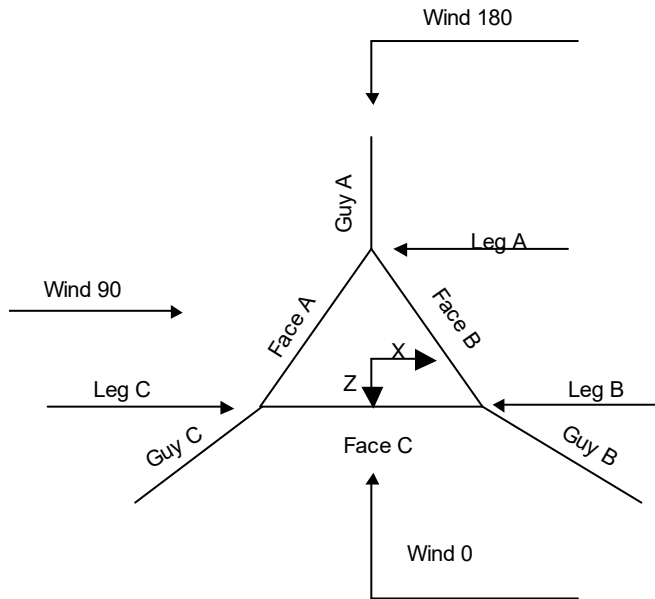

Corner & Starmount Guyed Tower

Tower Section Geometry

Tower Section	Tower Elevation	Assembly Database	Description	Section Width	Number of Sections	Section Length
	ft			ft		ft
T1-T8	180.00-20.00			3.50	8	20.00
T9	20.00-5.00			3.50	1	15.00
T10	5.00-0.00			3.50	1	5.00

Tower Section Geometry (cont'd)

Tower Section	Tower Elevation	Diagonal Spacing	Bracing Type	Has K Brace End Panels	Has Horizontals	Top Girt Offset	Bottom Girt Offset
	ft	ft				in	in
T1-T8	180.00-20.00	3.21	TX Brace	No	Yes	3.0000	4.5000
T9	20.00-5.00	3.59	TX Brace	No	Yes	3.0000	4.5000
T10	5.00-0.00	1.46	TX Brace	No	Yes	3.0000	4.5000

Tower Section Geometry (cont'd)

Tower Elevation	Leg Type	Leg Size	Leg Grade	Diagonal Type	Diagonal Size	Diagonal Grade
ft						
T1-T8 180.00-20.00	Pipe	P2.875"x0.203" (2.5 STD)	A529-55 (55 ksi)	Solid Round	5/8" solid	A36 (36 ksi)
T9 20.00-5.00	Pipe	P2.875"x0.203" (2.5 STD)	A529-55 (55 ksi)	Solid Round	5/8" solid	A36 (36 ksi)
T10 5.00-0.00	Pipe	P2.875"x0.203" (2.5 STD)	A529-55 (55 ksi)	Solid Round	5/8" solid	A36 (36 ksi)

Tower Section Geometry (cont'd)

Tower Elevation ft	Top Girt Type	Top Girt Size	Top Girt Grade	Bottom Girt Type	Bottom Girt Size	Bottom Girt Grade
T1-T8 180.00-20.00	Single Angle	L 1.5 x 1.5 x 3/16	A36 (36 ksi)	Single Angle	L 1.5 x 1.5 x 3/16	A36 (36 ksi)
T9 20.00-5.00	Single Angle	L 1.5 x 1.5 x 3/16	A36 (36 ksi)	Single Angle	L 1.5 x 1.5 x 3/16	A36 (36 ksi)
T10 5.00-0.00	Single Angle	L 1.5 x 1.5 x 3/16	A36 (36 ksi)	Single Angle	L 1.5 x 1.5 x 3/16	A36 (36 ksi)

Tower Section Geometry (cont'd)

Tower Elevation ft	No. of Mid Girts	Mid Girt Type	Mid Girt Size	Mid Girt Grade	Horizontal Type	Horizontal Size	Horizontal Grade
T1-T8 180.00-20.00	None	Solid Round		A36 (36 ksi)	Single Angle	L 1.5 x 1.5 x 3/16	A36 (36 ksi)
T9 20.00-5.00	None	Solid Round		A36 (36 ksi)	Single Angle	L 1.5 x 1.5 x 3/16	A36 (36 ksi)
T10 5.00-0.00	None	Solid Round		A36 (36 ksi)	Single Angle	L 1.5 x 1.5 x 3/16	A36 (36 ksi)

Tower Section Geometry (cont'd)

Tower Elevation ft	Gusset Area (per face) ft ²	Gusset Thickness in	Gusset Grade	Adjust. Factor A _r	Adjust. Factor A _r	Weight Mult.	Double Angle Stitch Bolt Spacing Diagonals in	Double Angle Stitch Bolt Spacing Horizontals in	Double Angle Stitch Bolt Spacing Redundants in
T1-T8 180.00-20.00	0.00	0.0000	A36 (36 ksi)	1	1	1.02	36.0000	36.0000	36.0000
T9 20.00-5.00	0.00	0.0000	A36 (36 ksi)	1	1	1.02	36.0000	36.0000	36.0000
T10 5.00-0.00	0.00	0.0000	A36 (36 ksi)	1	1	1.02	36.0000	36.0000	36.0000

Tower Section Geometry (cont'd)

Tower Elevation ft	Calc K Single Angles	Calc K Solid Rounds	Legs	K Factors ¹							
				X Brace Diags X Y	K Brace Diags X Y	Single Diags X Y	Girts X Y	Horiz. X Y	Sec. Horiz. X Y	Inner Brace X Y	
T1-T8 180.00-20.00	Yes	Yes	1	1 1	1 1	1 1	1 1	1 1	1 1	0.85 0.85	1 1
T9 20.00-5.00	Yes	Yes	1	1 1	1 1	1 1	1 1	1 1	1 1	0.85 0.85	1 1
T10 5.00-0.00	Yes	Yes	1	1 1	1 1	1 1	1 1	1 1	1 1	0.85 0.85	1 1

¹Note: K factors are applied to member segment lengths. K-braces without inner supporting members will have the K factor in the out-of-plane direction applied to the overall length.

Tower Section Geometry (cont'd)

Tower Elevation ft	Leg		Diagonal		Top Girt		Bottom Girt		Mid Girt		Long Horizontal		Short Horizontal	
	Net Width Deduct in	U	Net Width Deduct in	U	Net Width Deduct in	U	Net Width Deduct in	U	Net Width Deduct in	U	Net Width Deduct in	U	Net Width Deduct in	U
T1-T8 180.00-20.00	0.0000	1	0.0000	1	0.0000	1	0.0000	1	0.0000	1	0.0000	1	0.0000	1
T9 20.00-5.00	0.0000	1	0.0000	1	0.0000	1	0.0000	1	0.0000	1	0.0000	1	0.0000	1
T10 5.00-0.00	0.0000	1	0.0000	1	0.0000	1	0.0000	1	0.0000	1	0.0000	1	0.0000	1

Tower Elevation ft	Redundant Horizontal		Redundant Diagonal		Redundant Sub-Diagonal		Redundant Sub-Horizontal		Redundant Vertical		Redundant Hip		Redundant Hip Diagonal	
	Net Width Deduct in	U	Net Width Deduct in	U	Net Width Deduct in	U	Net Width Deduct in	U	Net Width Deduct in	U	Net Width Deduct in	U	Net Width Deduct in	U
T1-T8 180.00-20.00	0.0000	0.75	0.0000	0.75	0.0000	0.75	0.0000	0.75	0.0000	0.75	0.0000	0.75	0.0000	0.75
T9 20.00-5.00	0.0000	0.75	0.0000	0.75	0.0000	0.75	0.0000	0.75	0.0000	0.75	0.0000	0.75	0.0000	0.75
T10 5.00-0.00	0.0000	0.75	0.0000	0.75	0.0000	0.75	0.0000	0.75	0.0000	0.75	0.0000	0.75	0.0000	0.75

Tower Section Geometry (cont'd)

Tower Elevation ft	Leg Connection Type	Leg		Diagonal		Top Girt		Bottom Girt		Mid Girt		Long Horizontal		Short Horizontal	
		Bolt Size in	No.	Bolt Size in	No.	Bolt Size in	No.	Bolt Size in	No.	Bolt Size in	No.	Bolt Size in	No.	Bolt Size in	No.
T1-T8 180.00-20.00	Flange	0.7500	4	0.6250	0	0.6250	0	0.6250	0	0.6250	0	0.6250	0	0.6250	0
		A325N			A325N		A325N		A325N		A325N		A325N		A325N
T9 20.00-5.00	Flange	0.7500	4	0.6250	0	0.6250	0	0.6250	0	0.6250	0	0.6250	0	0.6250	0
		A325N			A325N		A325N		A325N		A325N		A325N		A325N
T10 5.00-0.00	Flange	0.7500	4	0.6250	0	0.6250	0	0.6250	0	0.6250	0	0.6250	0	0.6250	0
		A325N			A325N		A325N		A325N		A325N		A325N		A325N

Guy Data

Guy Elevation ft	Guy Grade	Guy Size	Initial Tension K	%	Guy Modulus ksi	Guy Weight plf	L_u ft	Anchor Radius ft	Anchor Azimuth Adj. °	Anchor Elevation ft	End Fitting Efficiency %
170.063	EHS	A	5/8	4.24	10%	23000	0.813	222.04	145.00	0.0000	100%
		B	5/8	4.24	10%	23000	0.813	222.04	145.00	0.0000	100%
		C	5/8	4.24	10%	23000	0.813	222.04	145.00	0.0000	100%
116.521	EHS	A	9/16	3.50	10%	23000	0.671	184.34	145.00	0.0000	100%
		B	9/16	3.50	10%	23000	0.671	184.34	145.00	0.0000	100%
		C	9/16	3.50	10%	23000	0.671	184.34	145.00	0.0000	100%
59.75	EHS	A	9/16	3.50	10%	23000	0.671	154.84	145.00	0.0000	100%
		B	9/16	3.50	10%	23000	0.671	154.84	145.00	0.0000	100%
		C	9/16	3.50	10%	23000	0.671	154.84	145.00	0.0000	100%

Guy Data(cont'd)

Guy Elevation ft	Mount Type	Torque-Arm Spread ft	Torque-Arm Leg Angle °	Torque-Arm Style	Torque-Arm Grade	Torque-Arm Type	Torque-Arm Size
170.063	Torque Arm	7.00	15.0000	Dog Ear	A36 (36 ksi)	Single Angle	L 3 x 3 x 1/4
116.521	Torque Arm	7.00	15.0000	Dog Ear	A36 (36 ksi)	Single Angle	L 3 x 3 x 1/4
59.75	Corner						

Guy Data (cont'd)

Guy Elevation ft	Diagonal Grade	Diagonal Type	Upper Diagonal Size	Lower Diagonal Size	Is Strap.	Pull-Off Grade	Pull-Off Type	Pull-Off Size
170.06	A36 (36 ksi)	Solid Round			No	A36 (36 ksi)	Single Angle	L 1.75 x 1.75 x 1/4
116.52	A36 (36 ksi)	Solid Round			No	A36 (36 ksi)	Single Angle	L 1.75 x 1.75 x 1/4
59.75	A36 (36 ksi)	Solid Round			No	A36 (36 ksi)	Single Angle	L 1.75 x 1.75 x 1/4

Guy Data (cont'd)

Guy Elevation ft	Cable Weight A K	Cable Weight B K	Cable Weight C K	Cable Weight D K	Tower Intercept A ft	Tower Intercept B ft	Tower Intercept C ft	Tower Intercept D ft
170.063	0.18	0.18	0.18		4.65 3.7 sec/pulse	4.65 3.7 sec/pulse	4.65 3.7 sec/pulse	
116.521	0.12	0.12	0.12		3.22 3.1 sec/pulse	3.22 3.1 sec/pulse	3.22 3.1 sec/pulse	
59.75	0.10	0.10	0.10		2.29 2.6 sec/pulse	2.29 2.6 sec/pulse	2.29 2.6 sec/pulse	

Guy Data (cont'd)

Guy Elevation ft	Calc K Single Angles	Calc K Solid Rounds	Torque Arm		Pull Off		Diagonal	
			K _x	K _y	K _x	K _y	K _x	K _y
170.063	Yes	Yes	1	1	1	1	1	1
116.521	Yes	Yes	1	1	1	1	1	1
59.75	Yes	Yes			1	1	1	1

Guy Data (cont'd)

Guy Elevation ft	Torque-Arm				Pull Off				Diagonal			
	Bolt Size in	Number	Net Width Deduct in	U	Bolt Size in	Number	Net Width Deduct in	U	Bolt Size in	Number	Net Width Deduct in	U
170.063	0.7500 A325N	2	0.0000	1	0.0000 A325N	0	0.0000	1	0.0000 A325N	0	0.0000	1
116.521	0.7500 A325N	2	0.0000	1	0.0000 A325N	0	0.0000	1	0.0000 A325N	0	0.0000	1
59.75	0.7500 A325N	2	0.0000	1	0.0000 A325N	0	0.0000	1	0.0000 A325N	0	0.0000	1

Guy Pressures

Guy Elevation ft	Guy Location	z ft	q _z psf	q _z Ice psf	Ice Thickness in
170.063	A	85.03	25	7	2.1986
	B	85.03	25	7	2.1986
	C	85.03	25	7	2.1986
116.521	A	58.26	23	6	2.1170
	B	58.26	23	6	2.1170
	C	58.26	23	6	2.1170
59.75	A	29.88	20	5	1.9802
	B	29.88	20	5	1.9802
	C	29.88	20	5	1.9802

Feed Line/Linear Appurtenances - Entered As Round Or Flat

Description	Face or Leg	Allow Shield	Exclude From Torque Calculation	Component Type	Placement ft	Face Offset in	Lateral Offset (Frac FW)	# Per Row	# Row	Clear Spacin in	Width or Diameter in	Perimete r in	Weight plf
Safety Line 3/8	A	No	No	Ar (CaAa)	180.00 - 5.00	0.0000	-0.45	1	1	0.3750	0.3750		0.22
5/8" ladder rung (12" long 16" oc)	A	No	No	Ar (CaAa)	180.00 - 5.00	0.0000	-0.4	1	1	0.4690	0.4690		0.78
MLC Hybrid 6Power/12Fi ber(1 1/2)	B	No	No	Ar (CaAa)	140.00 - 5.00	0.0000	0	2	1	0.5000	1.5000		0.98
LDF7-50A(1- 5/8") (includes 3 hybrid)	B	No	No	Ar (CaAa)	140.00 - 5.00	0.0000	0	15	6	0.5000	1.9800		0.82
LDF6-50A(1- 1/4)	C	No	No	Ar (CaAa)	150.00 - 5.00	0.0000	0	6	6	0.5000	1.5500		0.60
FB-L98-002- XXX(3/8)	C	No	No	Ar (CaAa)	150.00 - 5.00	0.0000	0	1	1	0.3937	0.3937		0.06
WR- VG86ST- BRD(3/4)	C	No	No	Ar (CaAa)	150.00 - 5.00	0.0000	0	2	1	0.7950	0.7950		0.58
LDF7-50A(1- 5/8") (hybrid)	A	No	No	Ar (CaAa)	180.00 - 5.00	0.0000	0	3	3	1.0000	1.9800		0.82

Discrete Tower Loads

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustmen t	Placement ft	CAAA Front ft ²	CAAA Side ft ²	Weight K
			Horz Lateral ft ft	Vert ft					
AIR6449 B41_TIA w/ Mount Pipe (Proposed)	A	From Leg	4.00	0.0000	180.00	No Ice	5.89	3.28	0.12
			0.00			1/2"	6.26	3.74	0.17
			0.00			Ice	6.63	4.22	0.22
AIR6449 B41_TIA w/ Mount Pipe (Proposed)	B	From Leg	4.00	0.0000	180.00	1" Ice	5.89	3.28	0.12
			0.00			No Ice	6.26	3.74	0.17
			0.00			Ice	6.63	4.22	0.22
AIR6449 B41_TIA w/ Mount Pipe (Proposed)	C	From Leg	4.00	0.0000	180.00	1" Ice	5.89	3.28	0.12
			0.00			No Ice	6.26	3.74	0.17
			0.00			Ice	6.63	4.22	0.22
APXVAARR24_43-U- NA20_TIA w/ Mount Pipe (Proposed)	A	From Leg	4.00	0.0000	180.00	1" Ice	20.48	11.02	0.19
			0.00			No Ice	21.23	12.55	0.32
			0.00			Ice	21.99	14.10	0.47
APXVAARR24_43-U- NA20_TIA w/ Mount Pipe (Proposed)	B	From Leg	4.00	0.0000	180.00	1" Ice	20.48	11.02	0.19
			0.00			No Ice	21.23	12.55	0.32
			0.00			Ice	21.99	14.10	0.47
APXVAARR24_43-U- NA20_TIA w/ Mount Pipe (Proposed)	C	From Leg	4.00	0.0000	180.00	1" Ice	20.48	11.02	0.19
			0.00			No Ice	21.23	12.55	0.32
			0.00			Ice	21.99	14.10	0.47
APX16DWV-16DWV-S-E- A20_TIA w/ Mount Pipe (Proposed)	A	From Leg	4.00	0.0000	180.00	1" Ice	6.82	3.52	0.06
			0.00			No Ice	7.28	4.29	0.11
			0.00			Ice	7.72	4.98	0.17
APX16DWV-16DWV-S-E- A20_TIA w/ Mount Pipe (Proposed)	B	From Leg	4.00	0.0000	180.00	1" Ice	6.82	3.52	0.06
			0.00			No Ice	7.28	4.29	0.11
			0.00			Ice	7.72	4.98	0.17
APX16DWV-16DWV-S-E- A20_TIA w/ Mount Pipe (Proposed)	C	From Leg	4.00	0.0000	180.00	1" Ice	6.82	3.52	0.06
			0.00			No Ice	7.28	4.29	0.11
			0.00			Ice	7.72	4.98	0.17
RADIO 4460 B2/B25 B66_TMO (Proposed)	A	From Leg	4.00	0.0000	180.00	1" Ice	2.14	1.69	0.11
			0.00			No Ice	2.32	1.85	0.13
			0.00			Ice	2.51	2.02	0.16
RADIO 4460 B2/B25 B66_TMO (Proposed)	B	From Leg	4.00	0.0000	180.00	1" Ice	2.14	1.69	0.11
			0.00			No Ice	2.32	1.85	0.13
			0.00			Ice	2.51	2.02	0.16
RADIO 4460 B2/B25 B66_TMO (Proposed)	C	From Leg	4.00	0.0000	180.00	1" Ice	2.14	1.69	0.11
			0.00			No Ice	2.32	1.85	0.13
			0.00			Ice	2.51	2.02	0.16
RADIO 4480 B71_TMO (Proposed)	A	From Leg	4.00	0.0000	180.00	1" Ice	2.85	1.38	0.09
			0.00			No Ice	3.06	1.54	0.11
			0.00			Ice	3.28	1.71	0.14
RADIO 4480 B71_TMO (Proposed)	B	From Leg	4.00	0.0000	180.00	1" Ice	2.85	1.38	0.09
			0.00			No Ice	3.06	1.54	0.11
			0.00			Ice	3.28	1.71	0.14
RADIO 4480 B71_TMO (Proposed)	C	From Leg	4.00	0.0000	180.00	1" Ice	2.85	1.38	0.09
			0.00			No Ice	3.06	1.54	0.11
			0.00			Ice	3.28	1.71	0.14
Platform Mount [LP 302-1]	C	None		0.0000	180.00	No Ice	26.56	26.56	1.71
						1/2"	33.67	33.67	2.26

Description	Face or Leg	Offset Type	Offsets:			Azimuth Adjustmen t °	Placement ft	CAAA	CAAA	Weight K	
			Horz	Lateral	Vert			Front	Side		
			ft	ft	ft		ft ²	ft ²			
							Ice 1" Ice	40.39	40.39	2.95	
*** Sector Mount [SM 803-3]	C	None				0.0000	170.00	No Ice 1/2" Ice 1" Ice	40.01 50.70 61.54	40.01 50.70 61.54	0.98 1.69 2.58
*** 800 10121_TIA w/ Mount Pipe	A	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	5.40 5.82 6.25	4.61 5.36 6.06	0.07 0.12 0.17
800 10121_TIA w/ Mount Pipe	B	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	5.40 5.82 6.25	4.61 5.36 6.06	0.07 0.12 0.17
800 10121_TIA w/ Mount Pipe	C	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	5.40 5.82 6.25	4.61 5.36 6.06	0.07 0.12 0.17
HPA-65R-BUU-H8_TIA w/ Mount Pipe	A	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	13.21 13.90 14.59	9.58 11.05 12.50	0.10 0.20 0.31
HPA-65R-BUU-H8_TIA w/ Mount Pipe	B	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	13.21 13.90 14.59	9.58 11.05 12.50	0.10 0.20 0.31
SBNHH-1D65A_TIA w/ Mount Pipe	C	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	6.19 6.64 7.07	5.25 6.04 6.74	0.05 0.11 0.17
RRU-11	A	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	1.64 1.80 1.97	1.26 1.41 1.57	0.04 0.06 0.08
RRU-11	B	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	1.64 1.80 1.97	1.26 1.41 1.57	0.04 0.06 0.08
RRU-11	C	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	1.64 1.80 1.97	1.26 1.41 1.57	0.04 0.06 0.08
RRUS 32 B2	A	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	2.74 2.96 3.19	1.67 1.86 2.05	0.05 0.07 0.10
RRUS 32 B2	B	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	2.74 2.96 3.19	1.67 1.86 2.05	0.05 0.07 0.10
RRUS 32 B2	C	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	2.74 2.96 3.19	1.67 1.86 2.05	0.05 0.07 0.10
DC6-48-60-18-8C	C	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	1.14 1.79 2.00	1.14 1.79 2.00	0.03 0.05 0.07
(2) LGP21401	A	From Leg	4.00 0.00 0.00			0.0000	150.00	No Ice 1/2" Ice 1" Ice	1.10 1.24 1.38	0.35 0.44 0.54	0.01 0.02 0.03
(2) LGP21401	B	From Leg	4.00			0.0000	150.00	No Ice	1.10	0.35	0.01

Description	Face or Leg	Offset Type	Offsets:		Azimuth Adjustmen t °	Placement ft	C _{AA} Front	C _{AA} Side	Weight K	
			Horz Lateral ft	Vert ft			ft ²	ft ²		
				0.00			1/2"	1.24	0.44	0.02
				0.00			Ice	1.38	0.54	0.03
(2) LGP21401	C	From Leg	4.00	0.0000	150.00		1" Ice	1.10	0.35	0.01
			0.00				No Ice	1.24	0.44	0.02
			0.00				1/2"	1.38	0.54	0.03
							Ice			
							1" Ice			
Sector Mount [SM 802-3]	C	None		0.0000	150.00		No Ice	25.34	25.34	0.93
							1/2"	33.44	33.44	1.39
							Ice	41.56	41.56	1.98
							1" Ice			
Side Arm Mount [SO 601-3]	C	None		0.0000	150.00		No Ice	7.63	7.63	0.48
							1/2"	9.41	9.41	0.59
							Ice	11.34	11.34	0.72
							1" Ice			

BXA-70063/6CF_TIA w/ Mount Pipe	A	From Leg	4.00	0.0000	140.00		No Ice	7.87	6.27	0.06
			0.00				1/2"	8.42	7.43	0.12
			0.00				Ice	8.94	8.30	0.19
							1" Ice			
BXA-70063/6CF_TIA w/ Mount Pipe	B	From Leg	4.00	0.0000	140.00		No Ice	7.87	6.27	0.06
			0.00				1/2"	8.42	7.43	0.12
			0.00				Ice	8.94	8.30	0.19
							1" Ice			
BXA-70063/6CF_TIA w/ Mount Pipe	C	From Leg	4.00	0.0000	140.00		No Ice	7.87	6.27	0.06
			0.00				1/2"	8.42	7.43	0.12
			0.00				Ice	8.94	8.30	0.19
							1" Ice			
(2) NHH-65B-R2B_TIA w/ Mount Pipe	A	From Leg	4.00	0.0000	140.00		No Ice	8.32	7.00	0.07
			0.00				1/2"	8.88	8.19	0.14
			0.00				Ice	9.40	9.08	0.21
							1" Ice			
(2) NHH-65B-R2B_TIA w/ Mount Pipe	B	From Leg	4.00	0.0000	140.00		No Ice	8.32	7.00	0.07
			0.00				1/2"	8.88	8.19	0.14
			0.00				Ice	9.40	9.08	0.21
							1" Ice			
(2) NHH-65B-R2B_TIA w/ Mount Pipe	C	From Leg	4.00	0.0000	140.00		No Ice	8.32	7.00	0.07
			0.00				1/2"	8.88	8.19	0.14
			0.00				Ice	9.40	9.08	0.21
							1" Ice			
MT6407-77A w/ Mount Pipe	A	From Leg	4.00	0.0000	140.00		No Ice	4.91	2.68	0.10
			0.00				1/2"	5.26	3.14	0.14
			0.00				Ice	5.61	3.62	0.18
							1" Ice			
MT6407-77A w/ Mount Pipe	B	From Leg	4.00	0.0000	140.00		No Ice	4.91	2.68	0.10
			0.00				1/2"	5.26	3.14	0.14
			0.00				Ice	5.61	3.62	0.18
							1" Ice			
MT6407-77A w/ Mount Pipe	C	From Leg	4.00	0.0000	140.00		No Ice	4.91	2.68	0.10
			0.00				1/2"	5.26	3.14	0.14
			0.00				Ice	5.61	3.62	0.18
							1" Ice			
B2/B66A RRH-BR049	A	From Leg	4.00	0.0000	140.00		No Ice	1.88	1.01	0.07
			0.00				1/2"	2.05	1.14	0.09
			0.00				Ice	2.22	1.28	0.11
							1" Ice			
B2/B66A RRH-BR049	B	From Leg	4.00	0.0000	140.00		No Ice	1.88	1.01	0.07
			0.00				1/2"	2.05	1.14	0.09
			0.00				Ice	2.22	1.28	0.11
							1" Ice			
B2/B66A RRH-BR049	C	From Leg	4.00	0.0000	140.00		No Ice	1.88	1.01	0.07
			0.00				1/2"	2.05	1.14	0.09
			0.00				Ice	2.22	1.28	0.11
							1" Ice			
B5/B13 RRH-BR04C	A	From Leg	4.00	0.0000	140.00		No Ice	1.88	1.01	0.07

Description	Face or Leg	Offset Type	Offsets: Horz Lateral Vert ft ft ft	Azimuth Adjustmen t °	Placement ft	C _{AA} Front ft ²	C _{AA} Side ft ²	Weight K	
			0.00			1/2"	2.05	1.14	0.09
			0.00			Ice	2.22	1.28	0.11
B5/B13 RRH-BR04C	B	From Leg	4.00	0.0000	140.00	1" Ice	1.88	1.01	0.07
			0.00			No Ice	2.05	1.14	0.09
			0.00			1/2"	2.22	1.28	0.11
			0.00			Ice			
			0.00			1" Ice			
B5/B13 RRH-BR04C	C	From Leg	4.00	0.0000	140.00	No Ice	1.88	1.01	0.07
			0.00			1/2"	2.05	1.14	0.09
			0.00			Ice	2.22	1.28	0.11
			0.00			1" Ice			
DB-B1-6C-12AB-0Z	A	From Leg	4.00	0.0000	140.00	No Ice	3.36	2.19	0.03
			0.00			1/2"	3.60	2.39	0.06
			0.00			Ice	3.84	2.61	0.09
			0.00			1" Ice			
DB-B1-6C-12AB-0Z	B	From Leg	4.00	0.0000	140.00	No Ice	3.36	2.19	0.03
			0.00			1/2"	3.60	2.39	0.06
			0.00			Ice	3.84	2.61	0.09
			0.00			1" Ice			
Sector Mount [SM 802-3]	C	None		0.0000	140.00	No Ice	25.34	25.34	0.93
						1/2"	33.44	33.44	1.39
						Ice	41.56	41.56	1.98
						1" Ice			
Side Arm Mount [SO 601-3]	C	None		0.0000	140.00	No Ice	7.63	7.63	0.48
						1/2"	9.41	9.41	0.59
						Ice	11.34	11.34	0.72
						1" Ice			
BSAMNT-SBS-1-2 (Mount Bracket)	A	From Leg	4.00	0.0000	140.00	No Ice	0.00	0.00	0.03
			0.00			1/2"	0.00	0.00	0.05
			0.00			Ice	0.00	0.00	0.07
			0.00			1" Ice			
BSAMNT-SBS-1-2 (Mount Bracket)	B	From Leg	4.00	0.0000	140.00	No Ice	0.00	0.00	0.03
			0.00			1/2"	0.00	0.00	0.05
			0.00			Ice	0.00	0.00	0.07
			0.00			1" Ice			
BSAMNT-SBS-1-2 (Mount Bracket)	C	From Leg	4.00	0.0000	140.00	No Ice	0.00	0.00	0.03
			0.00			1/2"	0.00	0.00	0.05
			0.00			Ice	0.00	0.00	0.07
			0.00			1" Ice			
***						1" Ice			

Load Combinations

Comb. No.	Description
1	Dead Only
2	1.2 Dead+1.6 Wind 0 deg - No Ice+1.0 Guy
3	1.2 Dead+1.6 Wind 30 deg - No Ice+1.0 Guy
4	1.2 Dead+1.6 Wind 60 deg - No Ice+1.0 Guy
5	1.2 Dead+1.6 Wind 90 deg - No Ice+1.0 Guy
6	1.2 Dead+1.6 Wind 120 deg - No Ice+1.0 Guy
7	1.2 Dead+1.6 Wind 150 deg - No Ice+1.0 Guy
8	1.2 Dead+1.6 Wind 180 deg - No Ice+1.0 Guy
9	1.2 Dead+1.6 Wind 210 deg - No Ice+1.0 Guy
10	1.2 Dead+1.6 Wind 240 deg - No Ice+1.0 Guy
11	1.2 Dead+1.6 Wind 270 deg - No Ice+1.0 Guy
12	1.2 Dead+1.6 Wind 300 deg - No Ice+1.0 Guy
13	1.2 Dead+1.6 Wind 330 deg - No Ice+1.0 Guy
14	1.2 Dead+1.0 Ice+1.0 Temp+Guy
15	1.2 Dead+1.0 Wind 0 deg+1.0 Ice+1.0 Temp+1.0 Guy
16	1.2 Dead+1.0 Wind 30 deg+1.0 Ice+1.0 Temp+1.0 Guy
17	1.2 Dead+1.0 Wind 60 deg+1.0 Ice+1.0 Temp+1.0 Guy

Comb. No.	Description
18	1.2 Dead+1.0 Wind 90 deg+1.0 Ice+1.0 Temp+1.0 Guy
19	1.2 Dead+1.0 Wind 120 deg+1.0 Ice+1.0 Temp+1.0 Guy
20	1.2 Dead+1.0 Wind 150 deg+1.0 Ice+1.0 Temp+1.0 Guy
21	1.2 Dead+1.0 Wind 180 deg+1.0 Ice+1.0 Temp+1.0 Guy
22	1.2 Dead+1.0 Wind 210 deg+1.0 Ice+1.0 Temp+1.0 Guy
23	1.2 Dead+1.0 Wind 240 deg+1.0 Ice+1.0 Temp+1.0 Guy
24	1.2 Dead+1.0 Wind 270 deg+1.0 Ice+1.0 Temp+1.0 Guy
25	1.2 Dead+1.0 Wind 300 deg+1.0 Ice+1.0 Temp+1.0 Guy
26	1.2 Dead+1.0 Wind 330 deg+1.0 Ice+1.0 Temp+1.0 Guy
27	Dead+Wind 0 deg - Service+Guy
28	Dead+Wind 30 deg - Service+Guy
29	Dead+Wind 60 deg - Service+Guy
30	Dead+Wind 90 deg - Service+Guy
31	Dead+Wind 120 deg - Service+Guy
32	Dead+Wind 150 deg - Service+Guy
33	Dead+Wind 180 deg - Service+Guy
34	Dead+Wind 210 deg - Service+Guy
35	Dead+Wind 240 deg - Service+Guy
36	Dead+Wind 270 deg - Service+Guy
37	Dead+Wind 300 deg - Service+Guy
38	Dead+Wind 330 deg - Service+Guy

Maximum Reactions

Location	Condition	Gov. Load Comb.	Vertical K	Horizontal, X K	Horizontal, Z K
Mast	Max. Vert	19	189.41	-0.24	-0.15
	Max. H _x	11	79.28	1.34	0.07
	Max. H _z	2	82.24	0.03	1.32
	Max. M _x	1	0.00	0.01	-0.00
	Max. M _z	1	0.00	0.01	-0.00
	Max. Torsion	9	1006.59	0.68	-1.29
	Min. Vert	1	57.30	0.01	-0.00
	Min. H _x	4	75.44	-1.32	0.75
	Min. H _z	8	75.27	-0.01	-1.40
	Min. M _x	1	0.00	0.01	-0.00
	Min. M _z	1	0.00	0.01	-0.00
	Min. Torsion	3	-1004.98	-0.78	1.22
	Guy C @ 145 ft Elev 0 ft Azimuth 240 deg	Max. Vert	10	-1.46	-1.15
Max. H _x		10	-1.46	-1.15	0.66
Max. H _z		4	-34.51	-34.54	19.94
Min. Vert		4	-34.51	-34.54	19.94
Min. H _x		4	-34.51	-34.54	19.94
Guy B @ 145 ft Elev 0 ft Azimuth 120 deg	Max. Vert	6	-1.49	1.23	0.71
	Max. H _x	12	-34.05	33.77	19.50
	Max. H _z	12	-34.05	33.77	19.50
	Min. Vert	12	-34.05	33.77	19.50
	Min. H _x	6	-1.49	1.23	0.71
Guy A @ 145 ft Elev 0 ft Azimuth 0 deg	Max. Vert	2	-1.48	0.00	-1.38
	Max. H _x	24	-20.52	1.26	-28.25
	Max. H _z	2	-1.48	0.00	-1.38
	Min. Vert	8	-34.21	-0.01	-39.30
	Min. H _x	18	-20.53	-1.26	-28.26
	Min. H _z	8	-34.21	-0.01	-39.30

Maximum Tower Deflections - Service Wind

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
T1	180 - 160	1.257	37	0.0039	0.0207
T2	160 - 140	1.307	29	0.0091	0.0582
T3	140 - 120	1.272	29	0.0528	0.1185
T4	120 - 100	0.860	29	0.0648	0.0312
T5	100 - 80	0.781	29	0.0331	0.1625
T6	80 - 60	0.726	28	0.0313	0.3873
T7	60 - 40	0.492	35	0.0249	0.3036
T8	40 - 20	0.532	34	0.0290	0.4323
T9	20 - 5	0.388	28	0.0566	0.2526
T10	5 - 0	0.078	35	0.0714	0.1117

Critical Deflections and Radius of Curvature - Service Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
180.00	AIR6449 B41_TIA w/ Mount Pipe	37	1.257	0.0039	0.0207	303373
170.06	Guy	37	1.278	0.0034	0.0328	152640
170.00	Sector Mount [SM 803-3]	37	1.278	0.0034	0.0329	151686
150.00	800 10121_TIA w/ Mount Pipe	29	1.333	0.0257	0.0995	13075
140.00	BXA-70063/6CF_TIA w/ Mount Pipe	29	1.272	0.0528	0.1185	6984
116.52	Guy	29	0.817	0.0603	0.0320	8022
59.75	Guy	35	0.491	0.0248	0.3040	9025

Maximum Tower Deflections - Design Wind

Section No.	Elevation ft	Horz. Deflection in	Gov. Load Comb.	Tilt °	Twist °
T1	180 - 160	10.335	6	0.2558	0.0785
T2	160 - 140	9.458	2	0.2354	0.2224
T3	140 - 120	8.409	10	0.4400	0.6882
T4	120 - 100	6.136	10	0.4476	0.2021
T5	100 - 80	5.065	10	0.2803	0.8711
T6	80 - 60	4.189	10	0.2403	0.9053
T7	60 - 40	3.024	10	0.1921	0.8048
T8	40 - 20	2.559	10	0.1921	0.9785
T9	20 - 5	1.606	10	0.3002	1.2734
T10	5 - 0	0.387	10	0.3579	0.4133

Critical Deflections and Radius of Curvature - Design Wind

Elevation ft	Appurtenance	Gov. Load Comb.	Deflection in	Tilt °	Twist °	Radius of Curvature ft
180.00	AIR6449 B41_TIA w/ Mount Pipe	6	10.335	0.2558	0.0785	145930
170.06	Guy	6	9.894	0.2193	0.1047	73424
170.00	Sector Mount [SM 803-3]	6	9.891	0.2192	0.1049	72965
150.00	800 10121_TIA w/ Mount Pipe	10	9.078	0.3325	0.5681	3785
140.00	BXA-70063/6CF_TIA w/ Mount Pipe	10	8.409	0.4400	0.6882	2146
116.52	Guy	10	5.846	0.4213	0.2125	2370
59.75	Guy	10	3.014	0.1917	0.8055	3205

Bolt Design Data

Section No.	Elevation ft	Component Type	Bolt Grade	Bolt Size in	Number Of Bolts	Maximum Load per Bolt K	Allowable Load per Bolt K	Ratio Load Allowable	Allowable Ratio	Criteria
T1	180	Leg	A325N	0.7500	4	2.36	29.82	0.079 ✓	1	Bolt Tension
		Torque Arm Top@170.063	A325N	0.7500	2	6.37	16.75	0.380 ✓	1	Member Bearing
		Torque Arm Bottom@170.063	A325N	0.7500	2	5.25	17.89	0.294 ✓	1	Bolt Shear
T2	160	Leg	A325N	0.7500	4	3.09	29.82	0.104 ✓	1	Bolt Tension
T3	140	Leg	A325N	0.7500	4	3.32	29.82	0.111 ✓	1	Bolt Tension
T4	120	Leg	A325N	0.7500	4	4.14	29.82	0.139 ✓	1	Bolt Tension
		Torque Arm Top@116.521	A325N	0.7500	2	4.63	16.75	0.277 ✓	1	Member Bearing
		Torque Arm Bottom@116.521	A325N	0.7500	2	2.49	17.89	0.139 ✓	1	Bolt Shear
T5	100	Leg	A325N	0.7500	4	4.44	29.82	0.149 ✓	1	Bolt Tension
T6	80	Leg	A325N	0.7500	4	4.66	29.82	0.156 ✓	1	Bolt Tension
T7	60	Leg	A325N	0.7500	4	5.29	29.82	0.177 ✓	1	Bolt Tension
T8	40	Leg	A325N	0.7500	4	5.57	29.82	0.187 ✓	1	Bolt Tension
T9	20	Leg	A325N	0.7500	4	5.35	29.82	0.179 ✓	1	Bolt Tension
T10	5	Leg	A325N	0.7500	4	5.68	29.82	0.190 ✓	1	Bolt Tension

Guy Design Data

Section No.	Elevation ft	Size	Initial Tension K	Breaking Load K	Actual T_u K	Allowable ϕT_n K	Required S.F.	Actual S.F.
T1	170.06 (A) (568)	5/8 EHS	4.24	42.40	12.81	25.44	1.000	1.986 ✓
	170.06 (A) (569)	5/8 EHS	4.24	42.40	12.72	25.44	1.000	1.999 ✓
	170.06 (B) (562)	5/8 EHS	4.24	42.40	12.75	25.44	1.000	1.996 ✓
	170.06 (B) (563)	5/8 EHS	4.24	42.40	12.86	25.44	1.000	1.978 ✓
	170.06 (C) (556)	5/8 EHS	4.24	42.40	12.74	25.44	1.000	1.997 ✓
	170.06 (C) (557)	5/8 EHS	4.24	42.40	12.70	25.44	1.000	2.003 ✓
T4	116.52 (A) (586)	9/16 EHS	3.50	35.00	10.02	21.00	1.000	2.096 ✓
	116.52 (A) (587)	9/16 EHS	3.50	35.00	9.77	21.00	1.000	2.149 ✓
	116.52 (B) (580)	9/16 EHS	3.50	35.00	9.75	21.00	1.000	2.155 ✓
	116.52 (B) (581)	9/16 EHS	3.50	35.00	9.83	21.00	1.000	2.136 ✓
	116.52 (C) (574)	9/16 EHS	3.50	35.00	9.98	21.00	1.000	2.103 ✓
	116.52 (C) (575)	9/16 EHS	3.50	35.00	10.04	21.00	1.000	2.091 ✓

Section No.	Elevation ft	Size	Initial Tension K	Breaking Load K	Actual T_u K	Allowable ϕT_n K	Required S.F.	Actual S.F.
T7	59.75 (A) (594)	9/16 EHS	3.50	35.00	9.20	21.00	1.000	2.282 ✓
	59.75 (B) (593)	9/16 EHS	3.50	35.00	9.19	21.00	1.000	2.286 ✓
	59.75 (C) (592)	9/16 EHS	3.50	35.00	9.15	21.00	1.000	2.294 ✓

Compression Checks

Leg Design Data (Compression)

Section No.	Elevation ft	Size	L ft	L_u ft	Kl/r	A in^2	P_u K	ϕP_n K	Ratio $\frac{P_u}{\phi P_n}$
T1	180 - 160	P2.875"x0.203" (2.5 STD)	20.00	3.23	40.9 K=1.00	1.7040	-28.18	73.73	0.382 ¹ ✓
T2	160 - 140	P2.875"x0.203" (2.5 STD)	20.00	3.23	40.9 K=1.00	1.7040	-37.52	73.73	0.509 ¹ ✓
T3	140 - 120	P2.875"x0.203" (2.5 STD)	20.00	3.23	40.9 K=1.00	1.7040	-41.39	73.73	0.561 ¹ ✓
T4	120 - 100	P2.875"x0.203" (2.5 STD)	20.00	3.23	40.9 K=1.00	1.7040	-51.81	73.73	0.703 ¹ ✓
T5	100 - 80	P2.875"x0.203" (2.5 STD)	20.00	3.23	40.9 K=1.00	1.7040	-53.26	73.73	0.722 ¹ ✓
T6	80 - 60	P2.875"x0.203" (2.5 STD)	20.00	3.23	40.9 K=1.00	1.7040	-55.67	73.73	0.755 ¹ ✓
T7	60 - 40	P2.875"x0.203" (2.5 STD)	20.00	3.23	40.9 K=1.00	1.7040	-63.29	73.73	0.858 ¹ ✓
T8	40 - 20	P2.875"x0.203" (2.5 STD)	20.00	3.23	40.9 K=1.00	1.7040	-67.30	73.73	0.913 ¹ ✓
T9	20 - 5	P2.875"x0.203" (2.5 STD)	15.00	3.59	45.5 K=1.00	1.7040	-67.04	71.40	0.939 ¹ ✓
T10	5 - 0	P2.875"x0.203" (2.5 STD)	5.39	1.57	19.9 K=1.00	1.7040	-69.36	81.70	0.849 ¹ ✓

¹ $P_u / \phi P_n$ controls

Horizontal Design Data (Compression)

Section No.	Elevation ft	Size	L ft	L_u ft	Kl/r	A in^2	P_u K	ϕP_n K	Ratio $\frac{P_u}{\phi P_n}$
T1	180 - 160	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-3.40	7.19	0.472 ¹ ✓
T2	160 - 140	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-2.77	7.19	0.385 ¹ ✓
T3	140 - 120	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-4.74	7.19	0.659 ¹ ✓
T4	120 - 100	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-2.40	7.19	0.334 ¹ ✓
T5	100 - 80	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-1.12	7.19	0.155 ¹ ✓

Section No.	Elevation ft	Size	L ft	L _u ft	KI/r	A in ²	P _u K	φP _n K	Ratio P _u / φP _n
T6	80 - 60	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-1.52	7.19	0.211 ¹
T7	60 - 40	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-1.83	7.19	0.255 ¹
T8	40 - 20	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-0.87	7.19	0.121 ¹
T9	20 - 5	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-1.13	7.19	0.157 ¹
T10	5 - 0	L 1.5 x 1.5 x 3/16	2.30	2.06	102.2 K=1.21	0.5273	-0.29	9.86	0.030 ¹

¹ P_u / φP_n controls

Top Girt Design Data (Compression)

Section No.	Elevation ft	Size	L ft	L _u ft	KI/r	A in ²	P _u K	φP _n K	Ratio P _u / φP _n
T1	180 - 160	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-1.82	7.19	0.253 ¹
T2	160 - 140	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-1.66	7.19	0.231 ¹
T3	140 - 120	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-1.81	7.19	0.251 ¹
T5	100 - 80	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-0.74	7.19	0.103 ¹
T6	80 - 60	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-0.33	7.19	0.046 ¹
T8	40 - 20	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-0.53	7.19	0.074 ¹
T9	20 - 5	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-0.38	7.19	0.053 ¹

¹ P_u / φP_n controls

Bottom Girt Design Data (Compression)

Section No.	Elevation ft	Size	L ft	L _u ft	KI/r	A in ²	P _u K	φP _n K	Ratio P _u / φP _n
T1	180 - 160	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-1.68	7.19	0.234 ¹
T2	160 - 140	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-0.51	7.19	0.071 ¹
T3	140 - 120	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-2.65	7.19	0.368 ¹
T4	120 - 100	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-0.88	7.19	0.123 ¹
T5	100 - 80	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-0.23	7.19	0.032 ¹
T6	80 - 60	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-0.61	7.19	0.085 ¹
T7	60 - 40	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-0.61	7.19	0.085 ¹

Section No.	Elevation ft	Size	L ft	L _u ft	Kl/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
T8	40 - 20	L 1.5 x 1.5 x 3/16	3.50	3.26	128.2 K=0.96	0.5273	-0.31	7.19	0.043 ¹ ✓
T10	5 - 0	L 1.5 x 1.5 x 3/16	0.26	0.02	60.5 K=64.5 0	0.5273	-1.96	14.09	0.139 ¹ ✓

¹ P_u / φP_n controls

Top Guy Pull-Off Design Data (Compression)

Section No.	Elevation ft	Size	L ft	L _u ft	Kl/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
T1	180 - 160	L 1.75 x 1.75 x 1/4	3.50	3.26	117.3 K=1.02	0.8125	-3.36	12.76	0.263 ¹ ✓
T4	120 - 100	L 1.75 x 1.75 x 1/4	3.50	3.26	117.3 K=1.02	0.8125	-2.98	12.76	0.233 ¹ ✓

¹ P_u / φP_n controls

Torque-Arm Bottom Design Data

Section No.	Elevation ft	Size	L ft	L _u ft	Kl/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
T1	180 - 160 (560)	L 3 x 3 x 1/4	3.50	2.92	89.6 K=1.51	1.4375	-10.25	30.52	0.336 ¹ ✓
T1	180 - 160 (561)	L 3 x 3 x 1/4	3.50	2.92	89.6 K=1.51	1.4375	-10.24	30.52	0.335 ¹ ✓
T1	180 - 160 (566)	L 3 x 3 x 1/4	3.50	2.92	89.6 K=1.51	1.4375	-10.30	30.52	0.337 ¹ ✓
T1	180 - 160 (567)	L 3 x 3 x 1/4	3.50	2.92	89.6 K=1.51	1.4375	-10.31	30.52	0.338 ¹ ✓
T1	180 - 160 (572)	L 3 x 3 x 1/4	3.50	2.92	89.6 K=1.51	1.4375	-10.51	30.52	0.344 ¹ ✓
T1	180 - 160 (573)	L 3 x 3 x 1/4	3.50	2.92	89.6 K=1.51	1.4375	-10.51	30.52	0.344 ¹ ✓
T4	120 - 100 (578)	L 3 x 3 x 1/4	3.50	2.92	89.6 K=1.51	1.4375	-4.93	30.52	0.162 ¹ ✓
T4	120 - 100 (579)	L 3 x 3 x 1/4	3.50	2.92	89.6 K=1.51	1.4375	-4.92	30.52	0.161 ¹ ✓
T4	120 - 100 (584)	L 3 x 3 x 1/4	3.50	2.92	89.6 K=1.51	1.4375	-4.77	30.52	0.156 ¹ ✓
T4	120 - 100 (585)	L 3 x 3 x 1/4	3.50	2.92	89.6 K=1.51	1.4375	-4.97	30.52	0.163 ¹ ✓
T4	120 - 100 (590)	L 3 x 3 x 1/4	3.50	2.92	89.6 K=1.51	1.4375	-4.87	30.52	0.160 ¹ ✓
T4	120 - 100 (591)	L 3 x 3 x 1/4	3.50	2.92	89.6 K=1.51	1.4375	-4.87	30.52	0.160 ¹ ✓

¹ P_u / φP_n controls

Tension Checks

Leg Design Data (Tension)


Section No.	Elevation ft	Size	L ft	L _u ft	Kl/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
T1	180 - 160	P2.875"x0.203" (2.5 STD)	20.00	3.23	40.9	1.7040	3.58	84.35	0.042 ¹
T2	160 - 140	P2.875"x0.203" (2.5 STD)	20.00	3.23	40.9	1.7040	7.72	84.35	0.092 ¹
T3	140 - 120	P2.875"x0.203" (2.5 STD)	20.00	0.25	3.2	1.7040	5.53	84.35	0.066 ¹
T4	120 - 100	P2.875"x0.203" (2.5 STD)	20.00	0.25	3.2	1.7040	2.73	84.35	0.032 ¹



¹ P_u / φP_n controls

Diagonal Design Data (Tension)

Section No.	Elevation ft	Size	L ft	L _u ft	Kl/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
T1	180 - 160	5/8" solid	4.76	4.44	340.7	0.3068	4.36	9.94	0.439 ¹
T2	160 - 140	5/8" solid	4.76	4.44	340.7	0.3068	4.16	9.94	0.418 ¹
T3	140 - 120	5/8" solid	4.76	4.44	340.7	0.3068	6.94	9.94	0.698 ¹
T4	120 - 100	5/8" solid	4.76	4.44	340.7	0.3068	2.89	9.94	0.290 ¹
T5	100 - 80	5/8" solid	4.76	4.44	340.7	0.3068	1.74	9.94	0.175 ¹
T6	80 - 60	5/8" solid	4.76	4.44	340.7	0.3068	2.21	9.94	0.222 ¹
T7	60 - 40	5/8" solid	4.76	4.44	340.7	0.3068	2.66	9.94	0.268 ¹
T8	40 - 20	5/8" solid	4.76	4.44	340.7	0.3068	1.42	9.94	0.143 ¹
T9	20 - 5	5/8" solid	5.02	4.67	358.9	0.3068	1.76	9.94	0.177 ¹
T10	5 - 0	5/8" solid	3.18	2.70	207.2	0.3068	0.61	9.94	0.062 ¹



¹ P_u / φP_n controls

Horizontal Design Data (Tension)

Section No.	Elevation ft	Size	L ft	L _u ft	Kl/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
T1	180 - 160	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	3.06	17.09	0.179 ¹
T2	160 - 140	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.58	17.09	0.034 ¹



Section No.	Elevation ft	Size	L ft	L _u ft	KI/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
T3	140 - 120	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.19	17.09	0.011 ¹ ✓
T4	120 - 100	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	1.91	17.09	0.112 ¹ ✓
T5	100 - 80	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.06	17.09	0.003 ¹ ✓
T6	80 - 60	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.06	17.09	0.004 ¹ ✓
T7	60 - 40	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.10	17.09	0.006 ¹ ✓
T8	40 - 20	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.08	17.09	0.005 ¹ ✓
T10	5 - 0	L 1.5 x 1.5 x 3/16	2.30	2.06	54.3	0.5273	0.07	17.09	0.004 ¹ ✓

¹ P_u / φP_n controls

Top Girt Design Data (Tension)

Section No.	Elevation ft	Size	L ft	L _u ft	KI/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
T1	180 - 160	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.91	17.09	0.053 ¹ ✓
T2	160 - 140	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.52	17.09	0.030 ¹ ✓
T3	140 - 120	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.73	17.09	0.043 ¹ ✓
T5	100 - 80	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.19	17.09	0.011 ¹ ✓
T6	80 - 60	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.10	17.09	0.006 ¹ ✓
T8	40 - 20	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.16	17.09	0.009 ¹ ✓
T9	20 - 5	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.11	17.09	0.006 ¹ ✓
T10	5 - 0	L 1.5 x 1.5 x 3/16	3.33	3.09	81.1	0.5273	8.75	17.09	0.512 ¹ ✓

¹ P_u / φP_n controls

Bottom Girt Design Data (Tension)

Section No.	Elevation ft	Size	L ft	L _u ft	KI/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
T1	180 - 160	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.55	17.09	0.032 ¹ ✓
T2	160 - 140	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.08	17.09	0.005 ¹ ✓
T3	140 - 120	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	1.38	17.09	0.081 ¹ ✓
T4	120 - 100	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.25	17.09	0.015 ¹ ✓

Section No.	Elevation ft	Size	L ft	L _u ft	KI/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
T5	100 - 80	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.03	17.09	0.002 ¹ ✓
T6	80 - 60	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.29	17.09	0.017 ¹ ✓
T7	60 - 40	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.21	17.09	0.013 ¹ ✓
T8	40 - 20	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	0.03	17.09	0.002 ¹ ✓
T9	20 - 5	L 1.5 x 1.5 x 3/16	3.50	3.26	85.7	0.5273	6.19	17.09	0.362 ¹ ✓

¹ P_u / φP_n controls

Top Guy Pull-Off Design Data (Tension)

Section No.	Elevation ft	Size	L ft	L _u ft	KI/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
T1	180 - 160	L 1.75 x 1.75 x 1/4	3.50	3.26	74.0	0.8125	2.99	26.32	0.114 ¹ ✓
T4	120 - 100	L 1.75 x 1.75 x 1/4	3.50	3.26	74.0	0.8125	3.14	26.32	0.119 ¹ ✓
T7	60 - 40	L 1.75 x 1.75 x 1/4	3.50	3.26	74.0	0.8125	4.33	26.32	0.165 ¹ ✓

¹ P_u / φP_n controls

Torque-Arm Top Design Data

Section No.	Elevation ft	Size	L ft	L _u ft	KI/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
T1	180 - 160 (558)	L 3 x 3 x 1/4	4.76	4.14	59.3	1.4375	12.72	46.58	0.273 ¹ ✓
T1	180 - 160 (559)	L 3 x 3 x 1/4	4.76	4.14	59.3	1.4375	12.73	46.58	0.273 ¹ ✓
T1	180 - 160 (564)	L 3 x 3 x 1/4	4.76	4.14	59.3	1.4375	12.73	46.58	0.273 ¹ ✓
T1	180 - 160 (565)	L 3 x 3 x 1/4	4.76	4.14	59.3	1.4375	12.72	46.58	0.273 ¹ ✓
T1	180 - 160 (570)	L 3 x 3 x 1/4	4.76	4.14	59.3	1.4375	12.73	46.58	0.273 ¹ ✓
T1	180 - 160 (571)	L 3 x 3 x 1/4	4.76	4.14	59.3	1.4375	12.73	46.58	0.273 ¹ ✓
T4	120 - 100 (576)	L 3 x 3 x 1/4	4.76	4.14	59.3	1.4375	9.26	46.58	0.199 ¹ ✓
T4	120 - 100 (577)	L 3 x 3 x 1/4	4.76	4.14	59.3	1.4375	9.26	46.58	0.199 ¹ ✓
T4	120 - 100 (582)	L 3 x 3 x 1/4	4.76	4.14	59.3	1.4375	9.25	46.58	0.199 ¹ ✓
T4	120 - 100 (583)	L 3 x 3 x 1/4	4.76	4.14	59.3	1.4375	9.26	46.58	0.199 ¹ ✓
T4	120 - 100	L 3 x 3 x 1/4	4.76	4.14	59.3	1.4375	9.26	46.58	0.199 ¹ ✓

Section No.	Elevation ft	Size	L ft	L _u ft	Kl/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
	(588)								✓
T4	120 - 100 (589)	L 3 x 3 x 1/4	4.76	4.14	59.3	1.4375	9.26	46.58	0.199 ¹ ✓

¹ P_u / φP_n controls

Torque-Arm Bottom Design Data

Section No.	Elevation ft	Size	L ft	L _u ft	Kl/r	A in ²	P _u K	φP _n K	Ratio $\frac{P_u}{\phi P_n}$
T1	180 - 160 (560)	L 3 x 3 x 1/4	3.50	2.92	43.6	1.4375	3.59	46.58	0.077 ¹ ✓
T1	180 - 160 (561)	L 3 x 3 x 1/4	3.50	2.92	43.6	1.4375	3.59	46.58	0.077 ¹ ✓
T1	180 - 160 (566)	L 3 x 3 x 1/4	3.50	2.92	43.6	1.4375	3.63	46.58	0.078 ¹ ✓
T1	180 - 160 (567)	L 3 x 3 x 1/4	3.50	2.92	43.6	1.4375	3.63	46.58	0.078 ¹ ✓
T1	180 - 160 (572)	L 3 x 3 x 1/4	3.50	2.92	43.6	1.4375	3.75	46.58	0.081 ¹ ✓
T1	180 - 160 (573)	L 3 x 3 x 1/4	3.50	2.92	43.6	1.4375	3.75	46.58	0.081 ¹ ✓
T4	120 - 100 (578)	L 3 x 3 x 1/4	3.50	2.92	43.6	1.4375	2.19	46.58	0.047 ¹ ✓
T4	120 - 100 (579)	L 3 x 3 x 1/4	3.50	2.92	43.6	1.4375	2.17	46.58	0.047 ¹ ✓
T4	120 - 100 (584)	L 3 x 3 x 1/4	3.50	2.92	43.6	1.4375	2.06	46.58	0.044 ¹ ✓
T4	120 - 100 (585)	L 3 x 3 x 1/4	3.50	2.92	43.6	1.4375	2.25	46.58	0.048 ¹ ✓
T4	120 - 100 (590)	L 3 x 3 x 1/4	3.50	2.92	43.6	1.4375	2.08	46.58	0.045 ¹ ✓
T4	120 - 100 (591)	L 3 x 3 x 1/4	3.50	2.92	43.6	1.4375	2.16	46.58	0.046 ¹ ✓

¹ P_u / φP_n controls


Section Capacity Table

Section No.	Elevation ft	Component Type	Size	Critical Element	P K	φP _{allow} K	% Capacity	Pass Fail
T1	180 - 160	Leg	P2.875"x0.203" (2.5 STD)	1	-28.18	73.73	38.2	Pass
T2	160 - 140	Leg	P2.875"x0.203" (2.5 STD)	61	-37.52	73.73	50.9	Pass
T3	140 - 120	Leg	P2.875"x0.203" (2.5 STD)	123	-41.39	73.73	56.1	Pass
T4	120 - 100	Leg	P2.875"x0.203" (2.5 STD)	183	-51.81	73.73	70.3	Pass
T5	100 - 80	Leg	P2.875"x0.203" (2.5 STD)	241	-53.26	73.73	72.2	Pass
T6	80 - 60	Leg	P2.875"x0.203" (2.5 STD)	302	-55.67	73.73	75.5	Pass
T7	60 - 40	Leg	P2.875"x0.203" (2.5 STD)	362	-63.29	73.73	85.8	Pass
T8	40 - 20	Leg	P2.875"x0.203" (2.5 STD)	422	-67.30	73.73	91.3	Pass
T9	20 - 5	Leg	P2.875"x0.203" (2.5 STD)	482	-67.04	71.40	93.9	Pass
T10	5 - 0	Leg	P2.875"x0.203" (2.5 STD)	524	-69.36	81.70	84.9	Pass
T1	180 - 160	Diagonal	5/8" solid	12	4.36	9.94	43.9	Pass
T2	160 - 140	Diagonal	5/8" solid	117	4.16	9.94	41.8	Pass
T3	140 - 120	Diagonal	5/8" solid	133	6.94	9.94	69.8	Pass

Section No.	Elevation ft	Component Type	Size	Critical Element	P K	ϕP_{allow} K	% Capacity	Pass Fail	
T4	120 - 100	Diagonal	5/8" solid	229	2.89	9.94	29.0	Pass	
T5	100 - 80	Diagonal	5/8" solid	298	1.74	9.94	17.5	Pass	
T6	80 - 60	Diagonal	5/8" solid	314	2.21	9.94	22.2	Pass	
T7	60 - 40	Diagonal	5/8" solid	410	2.66	9.94	26.8	Pass	
T8	40 - 20	Diagonal	5/8" solid	479	1.42	9.94	14.3	Pass	
T9	20 - 5	Diagonal	5/8" solid	492	1.76	9.94	17.7	Pass	
T10	5 - 0	Diagonal	5/8" solid	553	0.61	9.94	6.2	Pass	
T1	180 - 160	Horizontal	L 1.5 x 1.5 x 3/16	36	-3.40	7.19	47.2	Pass	
T2	160 - 140	Horizontal	L 1.5 x 1.5 x 3/16	113	-2.77	7.19	38.5	Pass	
T3	140 - 120	Horizontal	L 1.5 x 1.5 x 3/16	137	-4.74	7.19	65.9	Pass	
T4	120 - 100	Horizontal	L 1.5 x 1.5 x 3/16	232	-2.40	7.19	33.4	Pass	
T5	100 - 80	Horizontal	L 1.5 x 1.5 x 3/16	293	-1.12	7.19	15.5	Pass	
T6	80 - 60	Horizontal	L 1.5 x 1.5 x 3/16	318	-1.52	7.19	21.1	Pass	
T7	60 - 40	Horizontal	L 1.5 x 1.5 x 3/16	405	-1.83	7.19	25.5	Pass	
T8	40 - 20	Horizontal	L 1.5 x 1.5 x 3/16	474	-0.87	7.19	12.1	Pass	
T9	20 - 5	Horizontal	L 1.5 x 1.5 x 3/16	497	-1.13	7.19	15.7	Pass	
T10	5 - 0	Horizontal	L 1.5 x 1.5 x 3/16	547	-0.29	9.86	3.0	Pass	
T1	180 - 160	Top Girt	L 1.5 x 1.5 x 3/16	6	-1.82	7.19	25.3	Pass	
T2	160 - 140	Top Girt	L 1.5 x 1.5 x 3/16	65	-1.66	7.19	23.1	Pass	
T3	140 - 120	Top Girt	L 1.5 x 1.5 x 3/16	125	-1.81	7.19	25.1	Pass	
T5	100 - 80	Top Girt	L 1.5 x 1.5 x 3/16	245	-0.74	7.19	10.3	Pass	
T6	80 - 60	Top Girt	L 1.5 x 1.5 x 3/16	306	-0.33	7.19	4.6	Pass	
T8	40 - 20	Top Girt	L 1.5 x 1.5 x 3/16	426	-0.53	7.19	7.4	Pass	
T9	20 - 5	Top Girt	L 1.5 x 1.5 x 3/16	484	-0.38	7.19	5.3	Pass	
T10	5 - 0	Top Girt	L 1.5 x 1.5 x 3/16	526	8.75	17.09	51.2	Pass	
T1	180 - 160	Bottom Girt	L 1.5 x 1.5 x 3/16	8	-1.68	7.19	23.4	Pass	
T2	160 - 140	Bottom Girt	L 1.5 x 1.5 x 3/16	68	-0.51	7.19	7.1	Pass	
T3	140 - 120	Bottom Girt	L 1.5 x 1.5 x 3/16	128	-2.65	7.19	36.8	Pass	
T4	120 - 100	Bottom Girt	L 1.5 x 1.5 x 3/16	188	-0.88	7.19	12.3	Pass	
T5	100 - 80	Bottom Girt	L 1.5 x 1.5 x 3/16	249	-0.23	7.19	3.2	Pass	
T6	80 - 60	Bottom Girt	L 1.5 x 1.5 x 3/16	309	-0.61	7.19	8.5	Pass	
T7	60 - 40	Bottom Girt	L 1.5 x 1.5 x 3/16	369	-0.61	7.19	8.5	Pass	
T8	40 - 20	Bottom Girt	L 1.5 x 1.5 x 3/16	428	-0.31	7.19	4.3	Pass	
T9	20 - 5	Bottom Girt	L 1.5 x 1.5 x 3/16	487	6.19	17.09	36.2	Pass	
T10	5 - 0	Bottom Girt	L 1.5 x 1.5 x 3/16	529	-1.96	14.09	13.9	Pass	
T1	180 - 160	Guy A@170.063	5/8	568	12.81	25.44	50.3	Pass	
T4	120 - 100	Guy A@116.521	9/16	586	10.02	21.00	47.7	Pass	
T7	60 - 40	Guy A@59.75	9/16	594	9.20	21.00	43.8	Pass	
T1	180 - 160	Guy B@170.063	5/8	563	12.86	25.44	50.6	Pass	
T4	120 - 100	Guy B@116.521	9/16	581	9.83	21.00	46.8	Pass	
T7	60 - 40	Guy B@59.75	9/16	593	9.19	21.00	43.7	Pass	
T1	180 - 160	Guy C@170.063	5/8	556	12.74	25.44	50.1	Pass	
T4	120 - 100	Guy C@116.521	9/16	575	10.04	21.00	47.8	Pass	
T7	60 - 40	Guy C@59.75	9/16	592	9.15	21.00	43.6	Pass	
T1	180 - 160	Top Guy Pull-Off@170.063	L 1.75 x 1.75 x 1/4	45	-3.36	12.76	26.3	Pass	
T4	120 - 100	Top Guy Pull-Off@116.521	L 1.75 x 1.75 x 1/4	185	-2.98	12.76	23.3	Pass	
T7	60 - 40	Top Guy Pull-Off@59.75	L 1.75 x 1.75 x 1/4	366	4.33	26.32	16.5	Pass	
T1	180 - 160	Torque Arm Top@170.063	L 3 x 3 x 1/4	570	12.73	46.58	27.3	Pass	
T4	120 - 100	Torque Arm Top@116.521	L 3 x 3 x 1/4	588	9.26	46.58	19.9	Pass	
T1	180 - 160	Torque Arm Bottom@170.063	L 3 x 3 x 1/4	572	-10.51	30.52	34.4	Pass	
T4	120 - 100	Torque Arm Bottom@116.521	L 3 x 3 x 1/4	585	-4.97	30.52	16.3	Pass	
							Summary		
							Leg (T9)	93.9	Pass
							Diagonal (T3)	69.8	Pass
							Horizontal (T3)	65.9	Pass
							Top Girt (T10)	51.2	Pass
							Bottom Girt (T3)	36.8	Pass
							Guy A (T1)	50.3	Pass
							Guy B (T1)	50.6	Pass

Section No.	Elevation ft	Component Type	Size	Critical Element	P K	ϕP_{allow} K	% Capacity	Pass Fail
						Guy C (T1)	50.1	Pass
						Top Guy Pull-Off (T1)	26.3	Pass
						Torque Arm Top (T1)	38.0	Pass
						Torque Arm Bottom (T1)	34.4	Pass
						Bolt Checks	38.0	Pass
						RATING =	93.9	Pass

APPENDIX B
BASE LEVEL DRAWING

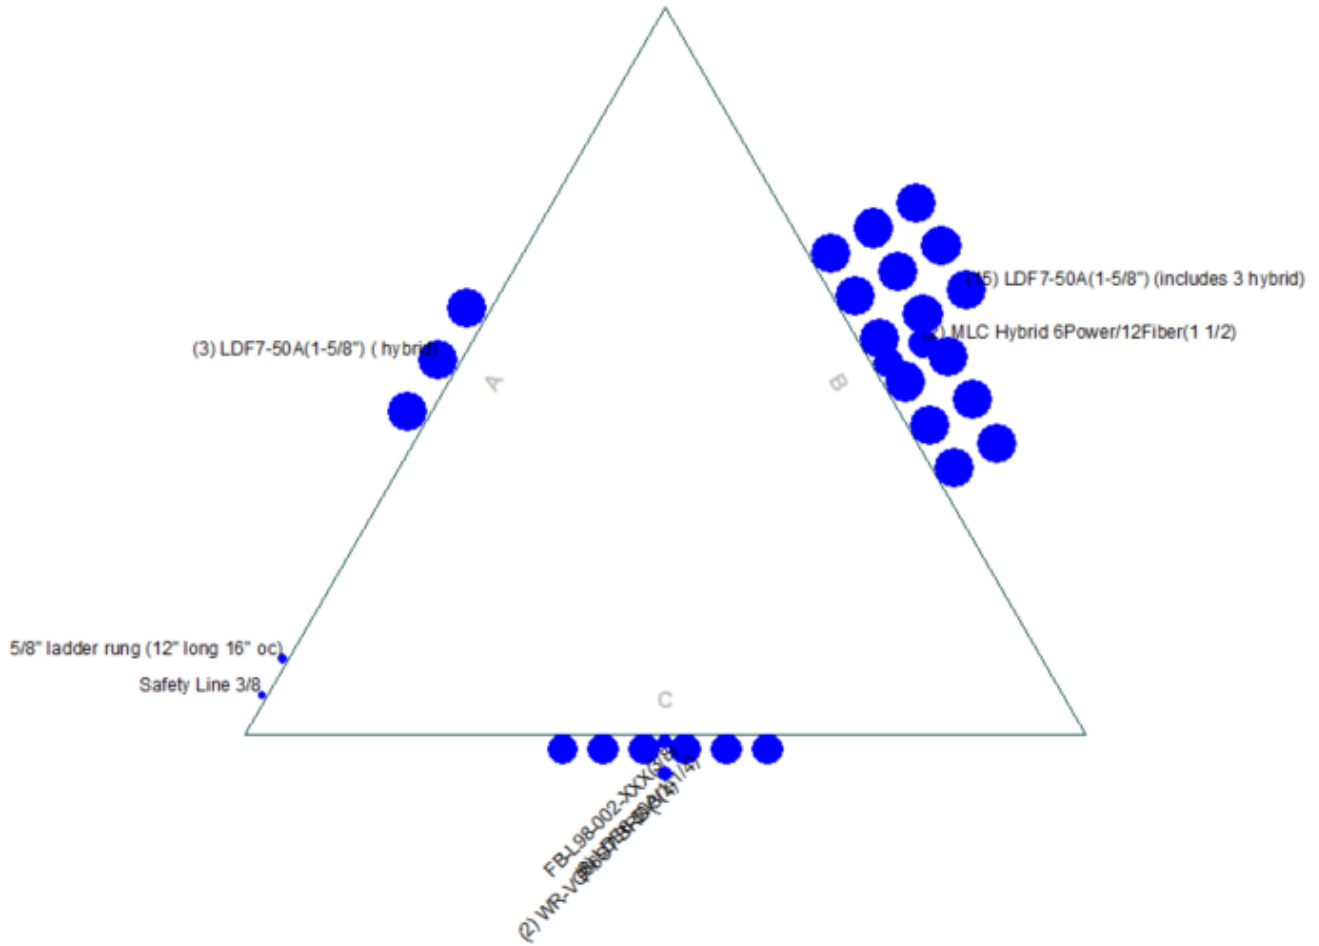

APPENDIX C
ADDITIONAL CALCULATIONS

Factored Foundation Loads:

Factored Axial Load (+Comp, -Ten) =	189	kips
Factored Horiz. Load at Top of Pier =	2	kips
Factored OTM at Top of Pier =	0	k-ft

LRFD Resistance and Load Factors:

	Φ	Dead Load Factors
Soil Bearing =	0.6	
Soil Weight =	0.75	1.2
Concrete Weight =	0.75	1.2

Soil Properties:

Depth to Water Table =	99	ft
Uplift Cone from	Top	of footing
Depth to Ignore for Uplift and PP =	3.333	ft

Passive Pressure has been included on the pier and pad.

Layer Thk ft	Soil Density pcf	Cohesion ksf	Friction Angle degrees	Ult Bearing ksf	Depth ft
5	118	0	45	78.275	5.00

Dimensions:


Pier Shape =	Round
Pier Width =	2 ft Diameter
Pier Height above Grade =	1 ft
Depth to Bottom of Footing =	4.5 ft
Footing Thickness =	1.5 ft
Footing Width, B =	5.5 ft
Footing Length, L =	5.5 ft

Concrete:

Concrete Strength =	3	ksi
Rebar Strength =	60	ksi

Summary Results:

Maximum Net Soil Bearing =	6.457	ksf	46.965	ksf
Uplift =	0.0	kips	25.7	kips
Punching Shear Stress =	0.070	ksi	0.164	ksi
Bending Shear Stress =	21.0	kips	76.3	kips
Bending Moment =	55.244	k-ft	96.2	k-ft
Conc Pier Reinforcing Steel =	191.3	kips	674.0	kips

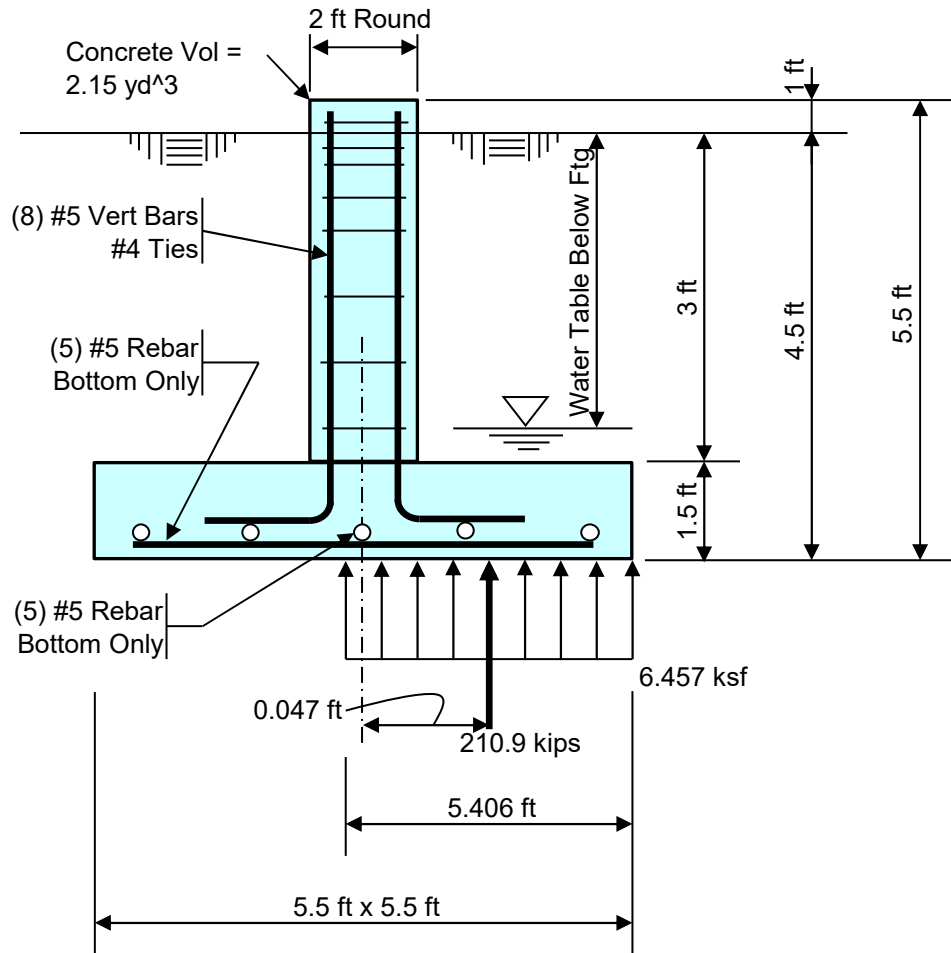

Total Pad Reinf Stl =	1.55	in ² < 2.14 in ² = Min Stl
Total Pier Reinf Stl =	2.48	in ² >= 2.26 in ² = Min Stl, OK
Footing Thickness =	1.50	ft >= 1.05 ft = Min Ftg Thk, OK

Stress Ratio =	13.7%	in Soil Bearing
Stress Ratio =	0.0%	in Uplift
Stress Ratio =	42.4%	in Punching Shear
Stress Ratio =	27.5%	in Bending Shear
Stress Ratio =	57.5%	in Bending Moment
Stress Ratio =	28.4%	in Pier Rebar

Deadman Guy Anchor Analysis (LRFD)


Guy Anchor: B2

PJF Job No. **A13321-0014.001.8700**

Project Name: **702496 Stafford, CT**

Engineer: **CMH**

Uplift Force =	<u>35</u>	k
Horizontal Force =	<u>40</u>	k
Load Factor, Concrete Weight =	<u>0.9</u>	
Φ, Soil Weight =	<u>0.75</u>	
Depth to Water Table =	<u>99</u>	ft
Toe Width (If Any) =	<u>0</u>	in
Toe Height (If Any) =	<u>0</u>	in
Depth to Bottom of Deadman =	<u>8</u>	ft
Deadman Block Height =	<u>2</u>	ft
Deadman Block Width =	<u>5.5</u>	ft
Deadman Block Length =	<u>11.5</u>	ft
Guy Rod Steel Strength, Fy =	<u>48</u>	ksi
Guy Rod Cross-Sectional Area =	<u>2.405</u>	in ²
Concrete Strength, f'c =	<u>3</u>	ksi
Rebar Strength, Fy =	<u>60</u>	ksi
Minimum Cover Over Rebar =	<u>6</u>	in
Horiz. Ult. Passive Press. Override =		ksf/ft

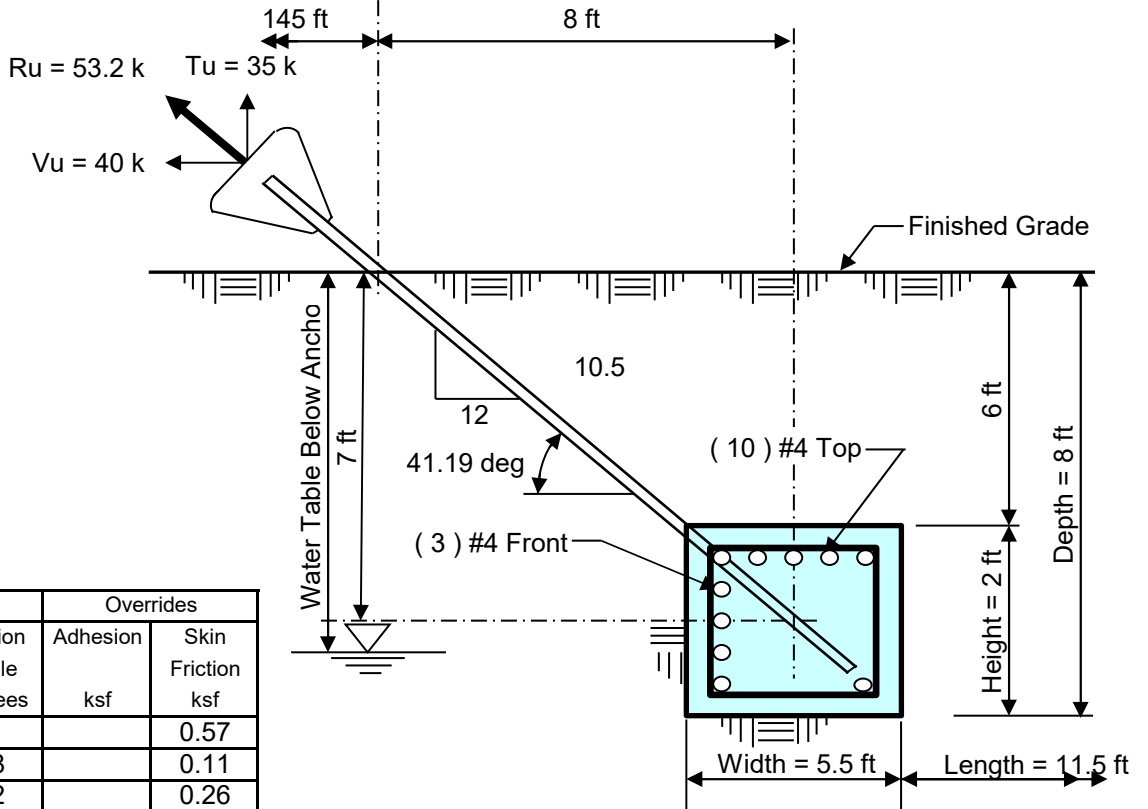

Layer	Thk	Dry Soil	Sat Soil	Uplift		Horizontal		Overrides	
				Density	Density	Cohesion	Friction	Cohesion	Friction
ft		pcf	pcf	ksf	degrees	ksf	degrees	ksf	ksf
2		114	114	0.6		0.6			0.57
1.3		125	125		28		28		0.11
0.7		125	125		42		42		0.26
2		125	125		42		42		0.36
2		125	125		42		42		0.52

Uplift Based on:

Soil Cone

Concrete Volume per Anchor =	<u>4.69</u>	yd ³
Concrete Volume for (3) Anchors =	<u>14.06</u>	yd ³

Inverted pyramid of soil in uplift will be taken from the top of the anchor.

Summary Results:

Guy Rod Tensile Force =	<u>53.15</u>	k	Required	<u>92.4</u>	k	Available	Capacity Ratio =	<u>57.5%</u>	in Tensile Force
Soil, Horizontal Resistance =	<u>40.0</u>	k		<u>74.2</u>	k		Capacity Ratio =	<u>53.9%</u>	in Horiz Resistance
Soil, Uplift Resistance =	<u>35.0</u>	k		<u>113.1</u>	k		Capacity Ratio =	<u>30.9%</u>	in Uplift Resistance
Steel, Uplift Bending Moment =	<u>65.7</u>	k-ft		<u>144.6</u>	k-ft		Capacity Ratio =	<u>45.4%</u>	in Bending Moment
Steel, Horizontal Bending Moment =	<u>57.5</u>	k-ft		<u>132.8</u>	k-ft		Capacity Ratio =	<u>43.3%</u>	in Bending Moment
Toe Shear =		k/ft			k/ft		Capacity Ratio =		in Shear

Deadman Guy Anchor Analysis (LRFD)


Guy Anchor: B3

PJF Job No. **A13321-0014.001.8700**

Project Name: **702496 Stafford, CT**

Engineer: **CMH**

Uplift Force =	<u>35</u>	k
Horizontal Force =	<u>40</u>	k
Load Factor, Concrete Weight =	<u>0.9</u>	
Φ, Soil Weight =	<u>0.75</u>	
Depth to Water Table =	<u>99</u>	ft
Toe Width (If Any) =	<u>0</u>	in
Toe Height (If Any) =	<u>0</u>	in
Depth to Bottom of Deadman =	<u>8</u>	ft
Deadman Block Height =	<u>2</u>	ft
Deadman Block Width =	<u>5.5</u>	ft
Deadman Block Length =	<u>11.5</u>	ft
Guy Rod Steel Strength, Fy =	<u>48</u>	ksi
Guy Rod Cross-Sectional Area =	<u>2.405</u>	in ²
Concrete Strength, f'c =	<u>3</u>	ksi
Rebar Strength, Fy =	<u>60</u>	ksi
Minimum Cover Over Rebar =	<u>6</u>	in
Horiz. Ult. Passive Press. Override =		ksf/ft

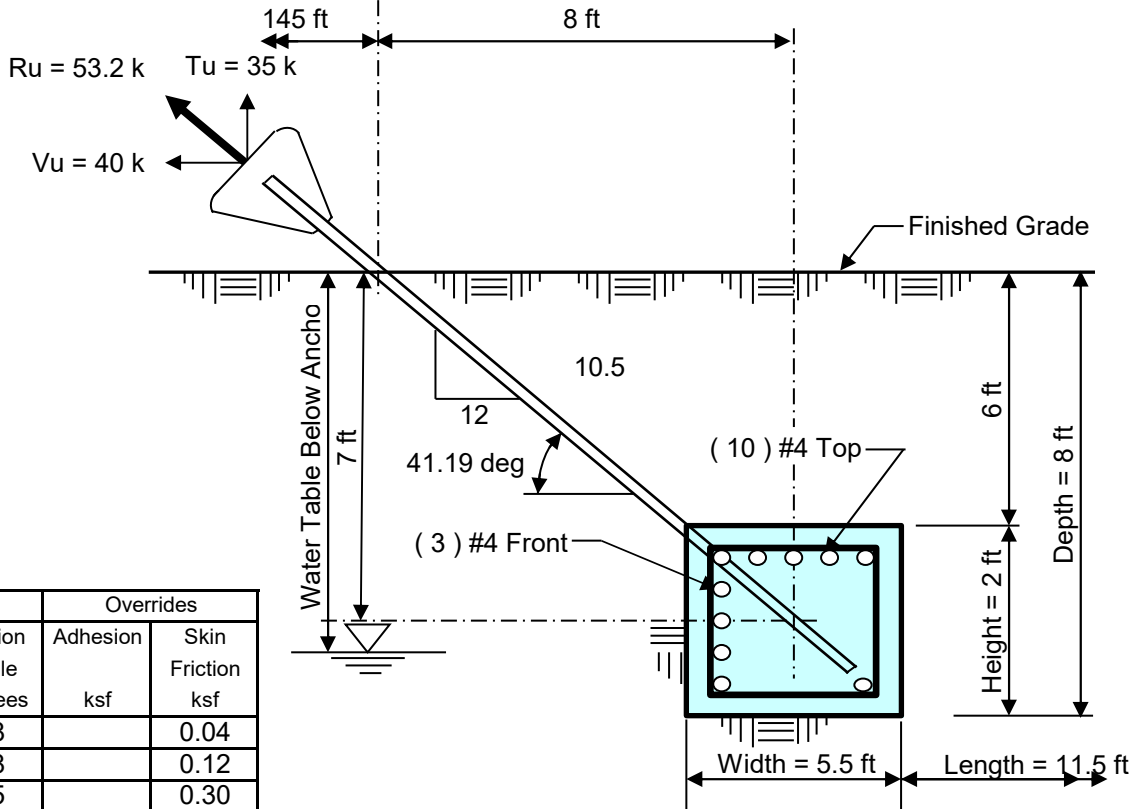

Layer	Thk	Dry Soil	Sat Soil	Uplift		Horizontal		Overrides	
				Cohesion	Friction	Cohesion	Friction	Adhesion	Skin
	ft	Density	Density	ksf	Angle	ksf	degrees	ksf	ksf
		pcf	pcf		degrees				
2		118	118		28		28		0.04
1.3		118	118		28		28		0.12
1.2		118	118		45		45		0.30
1.5		125	125		42		42		0.38
2		125	125		42		42		0.51

Uplift Based on:

Soil Cone

Concrete Volume per Anchor =	<u>4.69</u>	yd ³
Concrete Volume for (3) Anchors =	<u>14.06</u>	yd ³

Inverted pyramid of soil in uplift will be taken from the top of the anchor.

Summary Results:

	Required	Available	Capacity Ratio =	
Guy Rod Tensile Force =	<u>53.15</u> k	<u>92.4</u> k	<u>57.5%</u>	in Tensile Force
Soil, Horizontal Resistance =	<u>40.0</u> k	<u>73.4</u> k	<u>54.5%</u>	in Horiz Resistance
Soil, Uplift Resistance =	<u>35.0</u> k	<u>120.3</u> k	<u>29.1%</u>	in Uplift Resistance
Steel, Uplift Bending Moment =	<u>69.0</u> k-ft	<u>144.6</u> k-ft	<u>47.7%</u>	in Bending Moment
Steel, Horizontal Bending Moment =	<u>57.5</u> k-ft	<u>132.8</u> k-ft	<u>43.3%</u>	in Bending Moment
Toe Shear =				in Shear

Deadman Guy Anchor Analysis (LRFD)


Guy Anchor: B4

PJF Job No. **A13321-0014.001.8700**

Project Name: **702496 Stafford, CT**

Engineer: **CMH**

Uplift Force =	<u>34</u>	k
Horizontal Force =	<u>39</u>	k
Load Factor, Concrete Weight =	<u>0.9</u>	
Φ, Soil Weight =	<u>0.75</u>	
Depth to Water Table =	<u>99</u>	ft
Toe Width (If Any) =	<u>0</u>	in
Toe Height (If Any) =	<u>0</u>	in
Depth to Bottom of Deadman =	<u>8</u>	ft
Deadman Block Height =	<u>2</u>	ft
Deadman Block Width =	<u>5.5</u>	ft
Deadman Block Length =	<u>11.5</u>	ft
Guy Rod Steel Strength, Fy =	<u>48</u>	ksi
Guy Rod Cross-Sectional Area =	<u>2.405</u>	in ²
Concrete Strength, f'c =	<u>3</u>	ksi
Rebar Strength, Fy =	<u>60</u>	ksi
Minimum Cover Over Rebar =	<u>6</u>	in
Horiz. Ult. Passive Press. Override =		ksf/ft

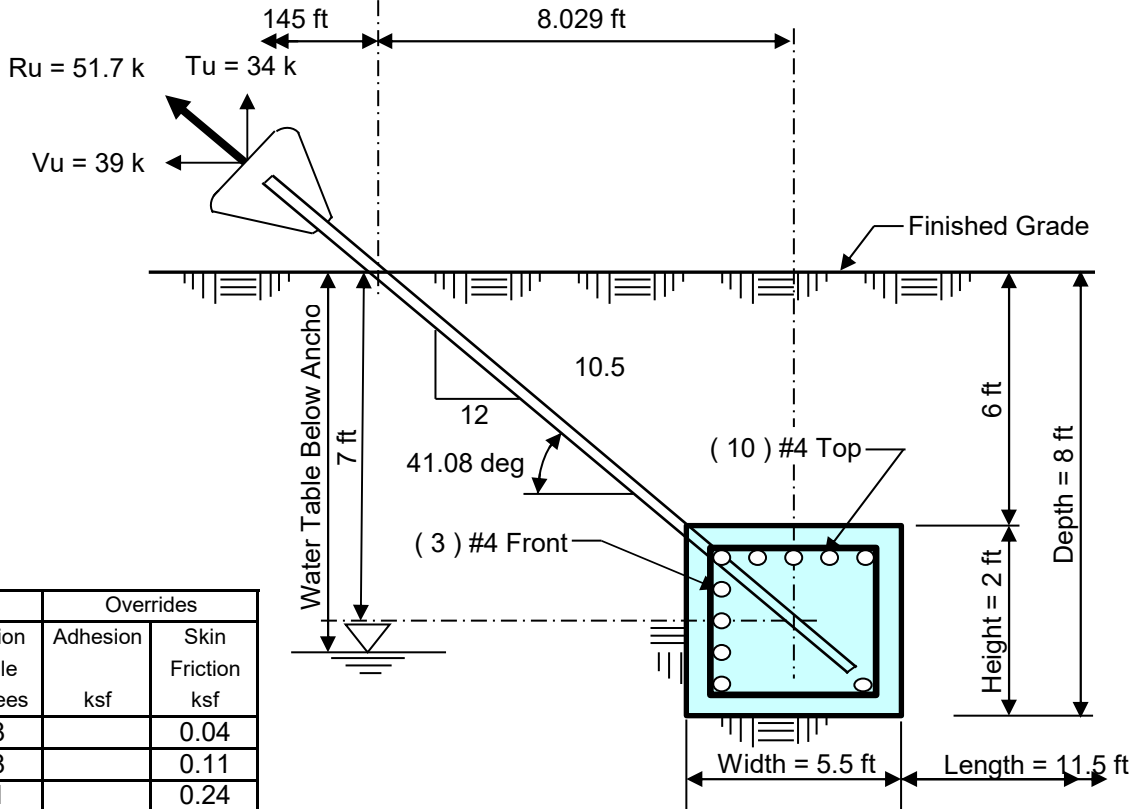

Layer	Thk	Dry Soil	Sat Soil	Uplift		Horizontal		Overrides	
				Cohesion	Friction	Cohesion	Friction	Adhesion	Skin
	ft	Density	Density	ksf	Angle	ksf	degrees	ksf	ksf
	2	113	113		28		28		0.04
	1.3	115	115		28		28		0.11
	0.7	115	115		41		41		0.24
	2	118	118		45		45		0.38
	2	125	125		42		42		0.50

Uplift Based on:

Soil Cone

Concrete Volume per Anchor =	<u>4.69</u>	yd ³
Concrete Volume for (3) Anchors =	<u>14.06</u>	yd ³

Inverted pyramid of soil in uplift will be taken from the top of the anchor.

Summary Results:

	Required	Available	Capacity Ratio =	
Guy Rod Tensile Force =	<u>51.74</u> k	<u>92.4</u> k	<u>56.0%</u>	in Tensile Force
Soil, Horizontal Resistance =	<u>39.0</u> k	<u>71.1</u> k	<u>54.9%</u>	in Horiz Resistance
Soil, Uplift Resistance =	<u>34.0</u> k	<u>118.8</u> k	<u>28.6%</u>	in Uplift Resistance
Steel, Uplift Bending Moment =	<u>67.3</u> k-ft	<u>144.6</u> k-ft	<u>46.6%</u>	in Bending Moment
Steel, Horizontal Bending Moment =	<u>56.1</u> k-ft	<u>132.8</u> k-ft	<u>42.2%</u>	in Bending Moment
Toe Shear =				in Shear

STANDARD CONDITIONS FOR FURNISHING OF PROFESSIONAL ENGINEERING SERVICES ON
EXISTING STRUCTURES BY PAUL J. FORD AND COMPANY

- 1) Paul J. Ford and Company has not made a field inspection to verify the tower member sizes or the antenna/coax loading. If the existing conditions are not as represented on these drawings, we should be contacted immediately to evaluate the significance of the deviation.
- 2) No allowance was made for any damaged, missing, or rusted members. The analysis of this tower assumes that no physical deterioration has occurred in any of the structural components of the tower and that all the tower members have the same load carrying capacity as the day the tower was erected.
- 3) It is not possible to have all the detailed information to perform a thorough analysis of every structural sub-component of an existing tower. The structural analysis by Paul J. Ford and Company verifies the adequacy of the main structural members of the tower. Paul J. Ford and Company provides a limited scope of service in that we cannot verify the adequacy of every weld, plate connection detail, etc.
- 4) This tower has been analyzed according to the minimum design wind loads recommended by the Telecommunications Industry Association Standard ANSI/TIA-222-G. If the owner or local or state agencies require a higher design wind load, Paul J. Ford and Company should be made aware of this requirement.
- 5) The enclosed sketches are a schematic representation of the tower that we have analyzed. If any material is fabricated from these sketches, the contractor shall be responsible for field verifying the existing conditions and for the proper fit and clearance in the field.
- 6) Miscellaneous items such as antenna mounts etc. have not been designed or detailed as a part of our work. We recommend that material of adequate size and strength be purchased from a reputable tower manufacturer.

Structural Analysis Report

Antenna Mount Analysis

Site Ref: CTHA826A


*33 South Road
Stafford, CT*

Centek Project No. 21005.31

~~*Date: June 8, 2021*~~

Rev. 1: October 12, 2021

Max Stress Ratio = 95.2%

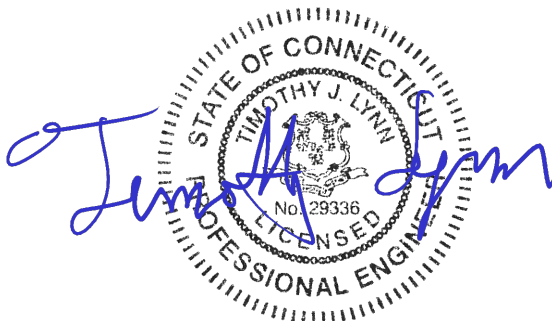

Prepared for:
T-Mobile USA
35 Griffin Road
Bloomfield, CT 06002

Table of Contents

SECTION 1 – REPORT

- ANTENNA AND APPURTENANCE SUMMARY
- STRUCTURE LOADING
- CONCLUSION

SECTION 2 – CALCULATIONS

- WIND LOAD ON APPURTENANCES
- RISA3D OUTPUT REPORT

SECTION 3 – REFERENCE MATERIALS (NOT INCLUDED WITHIN REPORT)

- RF DATA SHEET, DATED 10/06/2021

October 12, 2021

Mr. Kyle Richers
Transcend Wireless
10 Industrial Ave
Mahwah, NJ 07430

Re: *Structural Letter ~ Antenna Mount*
T-Mobile – Site Ref: CTHA826A
33 South Road
Stafford, CT 06076

Centek Project No. 21005.31

Dear Mr. Richers,

Centek Engineering, Inc. has reviewed the T-Mobile antenna installation at the above referenced site. The purpose of the review is to determine the structural adequacy of the existing mount, consisting of three (3) 12-ft gate booms to support the equipment configuration. The review considered the effects of wind load, dead load and ice load in accordance with the 2015 International Building Code as modified by the 2018 Connecticut State Building Code (CTBC) including ASCE 7-10 and ANSI/TIA-222-G *Structural Standards for Steel Antenna Towers and Supporting Structures*.

The loads considered in this analysis consist of the following:


- **T-Mobile:**
Gate Booms: Three (3) Commscope - VV-65A-R1 panel antennas, three (3) RFS APXVAARR24_43-U-NA20 panel antennas, three (3) Ericsson AIR6449 B41 panel antennas, three (3) Ericsson 4460 B25+B66 remote radio units and three (3) Ericsson 4480 B71+B85 remote radio units mounted on three (3) gate booms with a RAD center elevation of 180-ft +/- AGL.


The antenna mount was analyzed per the requirements of the 2015 International Building Code as modified by the 2018 Connecticut State Building Code considering a nominal design wind speed of 97 mph for Stafford as required in Appendix N of the 2018 Connecticut State Building Code.

A structural analysis of tower and foundation needs to be completed prior to any work.

Based on our review of the installation, it is our opinion that the **subject antenna mount have sufficient capacity** to support the aforementioned antenna configuration. If there are any questions regarding this matter, please feel free to call.

Respectfully Submitted by:


Timothy J. Lynn, PE
Structural Engineer

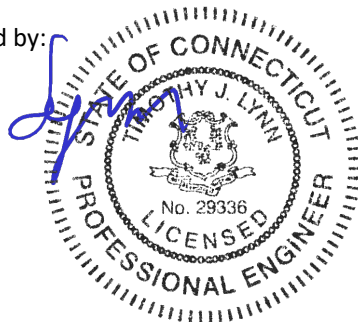

Prepared by:


Fernando J. Palacios
Engineer

CENTEK Engineering, Inc.
Structural Analysis – Mount Analysis
T-Mobile Site Ref. ~ CTHA826A
Stafford, CT
Rev 1~ October 12, 2021

Section 2 - Calculations



Figure 1 Antenna Mount

**Development of Design Heights, Exposure Coefficients,
 and Velocity Pressures Per TIA-222-G**

Wind Speeds

Basic Wind Speed	V := 97	mph	(User Input - 2018 CSBC Appendix N)
Basic Wind Speed with Ice	V _i := 50	mph	(User Input per Annex B of TIA-222-G)

Input

Structure Type =	Structure_Type := Lattice		(User Input)
Structure Category =	SC := 11		(User Input)
Exposure Category =	Exp := B		(User Input)
Structure Height =	h := 180	ft	(User Input)
Height to Center of Antennas =	z := 180	ft	(User Input)
Radial Ice Thickness =	t _i := 1.00	in	(User Input per Annex B of TIA-222-G)
Radial Ice Density =	l _d := 56.00	pcf	(User Input)
Topographic Factor =	K _{zt} := 1.0		(User Input)
	K _a := 1.0		(User Input)
Gust Response Factor =	G _H = 1.12		(User Input)

Output

Wind Direction Probability Factor =
$$K_d := \begin{cases} \text{if Structure_Type = Pole} \\ 0.95 \\ \text{if Structure_Type = Lattice} \\ 0.85 \end{cases} = 0.85$$
 (Per Table 2-2 of TIA-222-G)

(Per Table 2-3 of TIA-222-G)

Importance Factors =
$$I_{Wind} := \begin{cases} \text{if SC = 1} \\ 0.87 \\ \text{if SC = 2} \\ 1.00 \\ \text{if SC = 3} \\ 1.15 \end{cases} = 1$$

$$I_{Wind_w_Ice} := \begin{cases} \text{if SC = 1} \\ 0 \\ \text{if SC = 2} \\ 1.00 \\ \text{if SC = 3} \\ 1.00 \end{cases} = 1$$

$$K_{iz} := \left(\frac{z}{33} \right)^{0.1} = 1.185$$

$$I_{ice} := \begin{cases} \text{if SC = 1} \\ 0 \\ \text{if SC = 2} \\ 1.00 \\ \text{if SC = 3} \\ 1.25 \end{cases} = 1$$

Velocity Pressure Coefficient Antennas =
$$t_{iz} := 2.0 \cdot t_i \cdot I_{ice} \cdot K_{iz} \cdot K_{zt}^{0.35} = 2.37$$

$$K_z := 2.01 \cdot \left(\frac{z}{zg} \right)^\alpha = 1.169$$

Velocity Pressure w/o Ice Antennas =
$$q_z := 0.00256 \cdot K_d \cdot K_z \cdot V^2 \cdot I_{Wind} = 24 \text{ psf}$$

Velocity Pressure with Ice Antennas =
$$q_{z_{ice}} := 0.00256 \cdot K_d \cdot K_z \cdot V_i^2 \cdot I_{Wind} = 6 \text{ psf}$$

Development of Wind & Ice Load on Antennas

Antenna Data:

Antenna Model =	Commscope - VV-65A-R1	
Antenna Shape =	Flat	(User Input)
Antenna Height =	$L_{ant} := 54.7$	in (User Input)
Antenna Width =	$W_{ant} := 12.1$	in (User Input)
Antenna Thickness =	$T_{ant} := 4.6$	in (User Input)
Antenna Weight =	$WT_{ant} := 24$	lbs (User Input)
Number of Antennas =	$N_{ant} := 1$	(User Input)
Antenna Aspect Ratio =	$AR_{ant} := \frac{L_{ant}}{W_{ant}} = 4.5$	

Antenna Force Coefficient = $Ca_{ant} = 1.29$

Wind Load (without ice)

Surface Area for One Antenna = $SA_{antF} := \frac{L_{ant} \cdot W_{ant}}{144} = 4.6$ sf

Total Antenna Wind Force Front = $F_{ant} := qz \cdot G_H \cdot Ca_{ant} \cdot K_a \cdot SA_{antF} = 159$ lbs

Surface Area for One Antenna = $SA_{antS} := \frac{L_{ant} \cdot T_{ant}}{144} = 1.7$ sf

Total Antenna Wind Force Side = $F_{ant} := qz \cdot G_H \cdot Ca_{ant} \cdot K_a \cdot SA_{antS} = 60$ lbs

Wind Load (with ice)

Surface Area for One Antenna w/ Ice = $SA_{ICEantF} := \frac{(L_{ant} + 2 \cdot t_{iz}) \cdot (W_{ant} + 2 \cdot t_{iz})}{144} = 7$ sf

Total Antenna Wind Force w/ Ice Front = $F_{ant} := qz_{ice} \cdot G_H \cdot Ca_{ant} \cdot K_a \cdot SA_{ICEantF} = 64$ lbs

Surface Area for One Antenna w/ Ice = $SA_{ICEantS} := \frac{(L_{ant} + 2 \cdot t_{iz}) \cdot (T_{ant} + 2 \cdot t_{iz})}{144} = 3.9$ sf

Total Antenna Wind Force w/ Ice Side = $F_{ant} := qz_{ice} \cdot G_H \cdot Ca_{ant} \cdot K_a \cdot SA_{ICEantS} = 35$ lbs

Gravity Load (without ice)

Weight of All Antennas = $WT_{ant} \cdot N_{ant} = 24$ lbs

Gravity Loads (ice only)

Volume of Each Antenna = $V_{ant} := L_{ant} \cdot W_{ant} \cdot T_{ant} = 3045$ cu in

Volume of Ice on Each Antenna = $V_{ice} := (L_{ant} + 2 \cdot t_{iz}) \cdot (W_{ant} + 2 \cdot t_{iz}) \cdot (T_{ant} + 2 \cdot t_{iz}) - V_{ant} = 6304$ cu in

Weight of Ice on Each Antenna = $W_{ICEant} := \frac{V_{ice}}{1728} \cdot \rho_d = 204$ lbs

Weight of Ice on All Antennas = $W_{ICEant} \cdot N_{ant} = 204$ lbs

Development of Wind & Ice Load on Antennas

Antenna Data:

Antenna Model =	RFS APXVAALL24_43-U-NA20	
Antenna Shape =	Flat	(User Input)
Antenna Height =	$L_{ant} := 95.9$	in (User Input)
Antenna Width =	$W_{ant} := 24.0$	in (User Input)
Antenna Thickness =	$T_{ant} := 8.5$	in (User Input)
Antenna Weight =	$WT_{ant} := 149.$	lbs (User Input)
Number of Antennas =	$N_{ant} := 1$	(User Input)
Antenna Aspect Ratio =	$AR_{ant} := \frac{L_{ant}}{W_{ant}} = 4.0$	
Antenna Force Coefficient =	$Ca_{ant} = 1.27$	

Wind Load (without ice)

Surface Area for One Antenna = $SA_{antF} := \frac{L_{ant} \cdot W_{ant}}{144} = 16$ sf

Total Antenna Wind Force Front = $F_{ant} := qz \cdot G_H \cdot Ca_{ant} \cdot K_a \cdot SA_{antF} = 543$ lbs

Surface Area for One Antenna = $SA_{antS} := \frac{L_{ant} \cdot T_{ant}}{144} = 5.7$ sf

Total Antenna Wind Force Side = $F_{ant} := qz \cdot G_H \cdot Ca_{ant} \cdot K_a \cdot SA_{antS} = 192$ lbs

Wind Load (with ice)

Surface Area for One Antenna w/ Ice = $SA_{ICEantF} := \frac{(L_{ant} + 2 \cdot t_{iz}) \cdot (W_{ant} + 2 \cdot t_{iz})}{144} = 20.1$ sf

Total Antenna Wind Force w/ Ice Front = $F_{ant} := qz_{ice} \cdot G_H \cdot Ca_{ant} \cdot K_a \cdot SA_{ICEantF} = 181$ lbs

Surface Area for One Antenna w/ Ice = $SA_{ICEantS} := \frac{(L_{ant} + 2 \cdot t_{iz}) \cdot (T_{ant} + 2 \cdot t_{iz})}{144} = 9.3$ sf

Total Antenna Wind Force w/ Ice Side = $F_{ant} := qz_{ice} \cdot G_H \cdot Ca_{ant} \cdot K_a \cdot SA_{ICEantS} = 83$ lbs

Gravity Load (without ice)

Weight of All Antennas = $WT_{ant} \cdot N_{ant} = 149$ lbs

Gravity Loads (ice only)

Volume of Each Antenna = $V_{ant} := L_{ant} \cdot W_{ant} \cdot T_{ant} = 2 \cdot 10^4$ cu in

Volume of Ice on Each Antenna = $V_{ice} := (L_{ant} + 2 \cdot t_{iz}) \cdot (W_{ant} + 2 \cdot t_{iz}) \cdot (T_{ant} + 2 \cdot t_{iz}) - V_{ant} = 2 \cdot 10^4$ cu in

Weight of Ice on Each Antenna = $W_{ICEant} := \frac{V_{ice}}{1728} \cdot \rho_d = 607$ lbs

Weight of Ice on All Antennas = $W_{ICEant} \cdot N_{ant} = 607$ lbs

Development of Wind & Ice Load on Antennas

Antenna Data:

Antenna Model =	Ericsson AIR6449 B41	
Antenna Shape =	Flat	(User Input)
Antenna Height =	$L_{ant} := 33.1$	in (User Input)
Antenna Width =	$W_{ant} := 20.5$	in (User Input)
Antenna Thickness =	$T_{ant} := 8.3$	in (User Input)
Antenna Weight =	$WT_{ant} := 103$	lbs (User Input)
Number of Antennas =	$N_{ant} := 1$	(User Input)
Antenna Aspect Ratio =	$AR_{ant} := \frac{L_{ant}}{W_{ant}} = 1.6$	

Antenna Force Coefficient = $Ca_{ant} = 1.2$

Wind Load (without ice)

Surface Area for One Antenna = $SA_{antF} := \frac{L_{ant} \cdot W_{ant}}{144} = 4.7$ sf

Total Antenna Wind Force Front = $F_{ant} := qz \cdot G_H \cdot Ca_{ant} \cdot K_a \cdot SA_{antF} = 152$ lbs

Surface Area for One Antenna = $SA_{antS} := \frac{L_{ant} \cdot T_{ant}}{144} = 1.9$ sf

Total Antenna Wind Force Side = $F_{ant} := qz \cdot G_H \cdot Ca_{ant} \cdot K_a \cdot SA_{antS} = 61$ lbs

Wind Load (with ice)

Surface Area for One Antenna w/ Ice = $SA_{ICEantF} := \frac{(L_{ant} + 2 \cdot t_{iz}) \cdot (W_{ant} + 2 \cdot t_{iz})}{144} = 6.6$ sf

Total Antenna Wind Force w/ Ice Front = $F_{ant} := qz_{ice} \cdot G_H \cdot Ca_{ant} \cdot K_a \cdot SA_{ICEantF} = 57$ lbs

Surface Area for One Antenna w/ Ice = $SA_{ICEantS} := \frac{(L_{ant} + 2 \cdot t_{iz}) \cdot (T_{ant} + 2 \cdot t_{iz})}{144} = 3.4$ sf

Total Antenna Wind Force w/ Ice Side = $F_{ant} := qz_{ice} \cdot G_H \cdot Ca_{ant} \cdot K_a \cdot SA_{ICEantS} = 29$ lbs

Gravity Load (without ice)

Weight of All Antennas = $WT_{ant} \cdot N_{ant} = 103$ lbs

Gravity Loads (ice only)

Volume of Each Antenna = $V_{ant} := L_{ant} \cdot W_{ant} \cdot T_{ant} = 5632$ cu in

Volume of Ice on Each Antenna = $V_{ice} := (L_{ant} + 2 \cdot t_{iz}) \cdot (W_{ant} + 2 \cdot t_{iz}) \cdot (T_{ant} + 2 \cdot t_{iz}) - V_{ant} = 6821$

Weight of Ice on Each Antenna = $W_{ICEant} := \frac{V_{ice}}{1728} \cdot I_d = 221$ lbs

Weight of Ice on All Antennas = $W_{ICEant} \cdot N_{ant} = 221$ lbs

Development of Wind & Ice Load on RRUS's

RRUS Data:

RRUS Model =	Ericsson 4480 B71+B85	
RRUS Shape =	Flat	(User Input)
RRUS Height =	$L_{RRUS} := 21.8$	in (User Input)
RRUS Width =	$W_{RRUS} := 15.7$	in (User Input)
RRUS Thickness =	$T_{RRUS} := 7.8$	in (User Input)
RRUS Weight =	$WT_{RRUS} := 84$	lbs (User Input)
Number of RRUS's =	$N_{RRUS} := 1$	
RRUS Aspect Ratio =	$Ar_{RRUS} := \frac{L_{RRUS}}{W_{RRUS}} = 1.4$	
RRUS Force Coefficient =	$Ca_{RRUS} = 1.2$	

Wind Load (without ice)

Surface Area for One RRUS = $SA_{RRUSF} := \frac{L_{RRUS} \cdot W_{RRUS}}{144} = 2.4$ sf

Total RRUS Wind Force = $F_{RRUS} := qz \cdot G_H \cdot Ca_{RRUS} \cdot K_a \cdot SA_{RRUSF} = 76$ lbs

Surface Area for One RRUS = $SA_{RRUSS} := \frac{L_{RRUS} \cdot T_{RRUS}}{144} = 1.2$ sf

Total RRUS Wind Force = $F_{RRUS} := qz \cdot G_H \cdot Ca_{RRUS} \cdot K_a \cdot SA_{RRUSS} = 38$ lbs

Wind Load (with ice)

Surface Area for One RRUS w/ Ice = $SA_{ICERRUSF} := \frac{(L_{RRUS} + 2 \cdot t_{iz}) \cdot (W_{RRUS} + 2 \cdot t_{iz})}{144} = 3.8$ sf

Total RRUS Wind Force w/ Ice = $F_{IRRUS} := qz_{ice} \cdot G_H \cdot Ca_{RRUS} \cdot K_a \cdot SA_{ICERRUSF} = 32$ lbs

Surface Area for One RRUS w/ Ice = $SA_{ICERRUSS} := \frac{(L_{RRUS} + 2 \cdot t_{iz}) \cdot (T_{RRUS} + 2 \cdot t_{iz})}{144} = 2.3$ sf

Total RRUS Wind Force w/ Ice = $F_{IRRUS} := qz_{ice} \cdot G_H \cdot Ca_{RRUS} \cdot K_a \cdot SA_{ICERRUSS} = 20$ lbs

Gravity Load (without ice)

Weight of All RRUSs = $WT_{RRUS} \cdot N_{RRUS} = 84$ lbs

Gravity Loads (ice only)

Volume of Each RRUS = $V_{RRUS} := L_{RRUS} \cdot W_{RRUS} \cdot T_{RRUS} = 2670$ cu in

Volume of Ice on Each RRUS = $V_{ice} := (L_{RRUS} + 2 \cdot t_{iz}) \cdot (W_{RRUS} + 2 \cdot t_{iz}) \cdot (T_{RRUS} + 2 \cdot t_{iz}) - V_{RRUS} = 4133$ cu in

Weight of Ice on Each RRUS = $W_{ICERRUS} := \frac{V_{ice}}{1728} \cdot Id = 134$ lbs

Weight of Ice on All RRUSs = $W_{ICERRUS} \cdot N_{RRUS} = 134$ lbs

Development of Wind & Ice Load on RRUS's

RRUS Data:

RRUS Model =	Ericsson 4460 B25+B66
RRUS Shape =	Flat (User Input)
RRUS Height =	$L_{RRUS} := 19.6$ in (User Input)
RRUS Width =	$W_{RRUS} := 15.7$ in (User Input)
RRUS Thickness =	$T_{RRUS} := 12.1$ in (User Input)
RRUS Weight =	$WT_{RRUS} := 109$ lbs (User Input)
Number of RRUS's =	$N_{RRUS} := 1$
RRUS Aspect Ratio =	$Ar_{RRUS} := \frac{L_{RRUS}}{W_{RRUS}} = 1.2$
RRUS Force Coefficient =	$Ca_{RRUS} = 1.2$

Wind Load (without ice)

Surface Area for One RRUS = $SA_{RRUSF} := \frac{L_{RRUS} \cdot W_{RRUS}}{144} = 2.1$ sf

Total RRUS Wind Force = $F_{RRUS} := qz \cdot G_H \cdot Ca_{RRUS} \cdot K_a \cdot SA_{RRUSF} = 69$ lbs

Surface Area for One RRUS = $SA_{RRUSS} := \frac{L_{RRUS} \cdot T_{RRUS}}{144} = 1.6$ sf

Total RRUS Wind Force = $F_{RRUS} := qz \cdot G_H \cdot Ca_{RRUS} \cdot K_a \cdot SA_{RRUSS} = 53$ lbs

Wind Load (with ice)

Surface Area for One RRUS w/ Ice = $SA_{ICERRUSF} := \frac{(L_{RRUS} + 2 \cdot t_{iz}) \cdot (W_{RRUS} + 2 \cdot t_{iz})}{144} = 3.5$ sf

Total RRUS Wind Force w/ Ice = $F_{IRRUS} := qz_{ice} \cdot G_H \cdot Ca_{RRUS} \cdot K_a \cdot SA_{ICERRUSF} = 30$ lbs

Surface Area for One RRUS w/ Ice = $SA_{ICERRUSS} := \frac{(L_{RRUS} + 2 \cdot t_{iz}) \cdot (T_{RRUS} + 2 \cdot t_{iz})}{144} = 2.8$ sf

Total RRUS Wind Force w/ Ice = $F_{IRRUS} := qz_{ice} \cdot G_H \cdot Ca_{RRUS} \cdot K_a \cdot SA_{ICERRUSS} = 24$ lbs

Gravity Load (without ice)

Weight of All RRUSs = $WT_{RRUS} \cdot N_{RRUS} = 109$ lbs


Gravity Loads (ice only)

Volume of Each RRUS = $V_{RRUS} := L_{RRUS} \cdot W_{RRUS} \cdot T_{RRUS} = 3723$ cu in

Volume of Ice on Each RRUS = $V_{ice} := (L_{RRUS} + 2 \cdot t_{iz}) \cdot (W_{RRUS} + 2 \cdot t_{iz}) \cdot (T_{RRUS} + 2 \cdot t_{iz}) - V_{RRUS} = 4654$ cu in

Weight of Ice on Each RRUS = $W_{ICERRUS} := \frac{V_{ice}}{1728} \cdot Id = 151$ lbs

Weight of Ice on All RRUSs = $W_{ICERRUS} \cdot N_{RRUS} = 151$ lbs

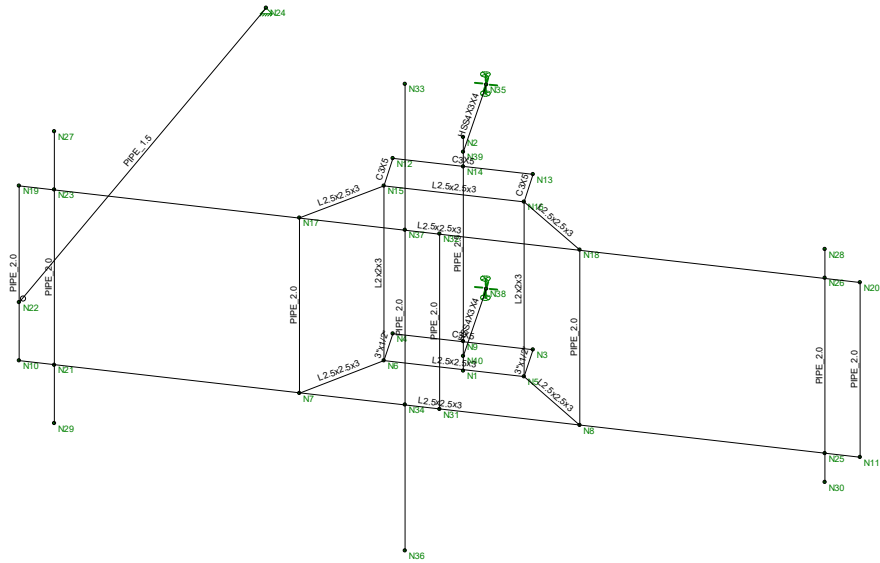

Envelope Only Solution

Centek
FJP
21005.31

CTHA826A - AMA
Member Framing

SK - 1
Oct 12, 2021 at 10:28 AM
CTHA826A_AMA.r3d

fj `cVUL'A cXY`GYHj|g

Ôã æ A ^ & cã } • A A T ^ { a ^ / A O æ & e	I A
T æ A Q c ^ } æ A U ^ & cã } • A A T ^ { a ^ / A O æ & e	J I A
Q & ^ a ^ A U @ æ A O ^ - { æã } N	Y ^ •
Q & ^ a ^ A æ A æã } * A O æ æã c A A Y æ a N	Y ^ •
Q & ^ a ^ A Y æ } æ * N	Y ^ •
V æ • A æã A O c ^ } A Q c ^ • ^ & cã } * A Y [a A Y æ N	Y ^ •
C E ^ æ S æã A T ^ • @ A Q a C D	F I I
T ^ / * ^ A V ^ æ } & ^ A Q D	E F G
U E O ^ cæ A Q æ } • a A V ^ æ } &	E E E A
Q & ^ a ^ A U E O ^ cæ A A Y æ } • N	Y ^ •
C E { { æã æã ^ A O ^ æ A U cã } ^ • • A A Y æ } • N	Y ^ •
T æ A Q ^ æã } • A A Y æ A U cã } ^ • •	H
O æ æ c A O B & ^ ^ æã } A Q c ^ ^ & a C D	H G G
Y æ A T ^ • @ U a ^ A Q D	F G
Ôã ^ } • ^ cã } A O } c ^ / ^ } & ^ A V E F E O E D	I
X ^ cæ A Q æ a	Y
O a æ A T ^ { a ^ / A U a } æã } A U æ ^	Y Z
U cæ æ A U c ^ /	U æ ^ • A O B & ^ ^ æ ^ a
O ^ } æ æ A U c ^ /	O B & ^ ^ æ ^ a U c ^ /

P c A U ^ a A U c ^ / A O a ^	O E U O A F I c O H I E F E M S U O O
Oã b ^ • A U cã } ^ • • N	Y ^ • Q a æã ^ D
U O U O } } ^ & cã } A O a ^	O E U O A F I c O H I E F E M O U O
O a A O { ^ a A U c ^ / A O a ^	O E U O U F E E F E M O U O
Y [a A O a ^	O E Y O A O U E F G H O U O
Y [a A ^ { } ^ æ a ^	L A F E E O
O } & ^ c A O a ^	O E O A F I E F
T æ } ^ A O a ^	O E O A H E E F F K O U O
O E { { æ } { A O a ^	O E A O T F E F E K O U O A O ^ æã *
U cæ ^ • • A U c ^ / A O a ^	O E U O A F I c O H I E F E M O U O
Oã b ^ • A U cã } ^ • • N	Y ^ • Q a æã ^ D


P ^ { a ^ / A ^ A U @ æ A U ^ a } •	I
U ^ a ^ a } A U æã } * A Q & ^ { ^ } cã D	I
Oã æ æ A O { } A T ^ c Q a	O c æ s O Q c ^ æã }
U æ { ^ A O ^ æã cæ c A U O E D	E I
O } & ^ c A U c ^ • A O &	U ^ & cæ } * æ
W ^ A O æã ^ a A U ^ & cã } • N	Y ^ •
W ^ A O æã ^ a A U ^ & cã } • A U æã N	Y ^ •
Oã æ A O æ } æ * A Y æ } æ * N	P
W ^ • ^ a A O & ^ A Y æ } æ * N	Y ^ •
T æ A A O æ A O æ } E A U æã } * N	P
O } & ^ c A U ^ a æ A U ^ c	U O O C E U ^ U O V ^ O E V T C E F I
T æ A A U c ^ / A A O { }	F
T æ A A U c ^ / A A O { }	I

9bj YcdY5=G7 % h fl * \$!%\$L ' @ : 8 ' GhYY ' 7 cXY7 \ YWg

	T ^ # U @ # D) a ^ A 0 # S # # #	S 0	U @ a # S # # #	O a	S 0] @ U) & A a] @ U) A a] @ T) A # @ T) # #	O a	O ^ }				
F	TH	UQ	EI	I	EI	H	IIEJF	IEFI	HEJI	HEJI	FEGH	PFEa
G	TI	OH	EIH	F	H	:	HUEII	IIEG	EIF	IEE	FEFI	PFEa
H	TI	HA	E FH	E	H	^	I FEG I	IIE	E E	HEH	FEII	PFEa
I	TI	HA	E I	EI	F	^	I FEG I	IIE	E E	HEH	FEI	PFEa
I	TI	SG	EJI	E	F	:	G E F	GFJG	EIH	FEIG	GGG	PGE
I	TI	SG	EJI	FE	H	^	G E H	GFJG	EIH	FEIG	GEI	PGE
I	TJ	SG	EHE	FE	H	:	G E H	GFJG	EIH	FEIG	GEI	PGE
I	TFE	SG	EIF	I	H	:	FI EI	GFJG	EIH	FE E	F	PGE
J	TF	OH	E EG	F	I	:	HUEII	IIEG	EIF	IEE	FE G	PFEa
FE	TFG	OH	EIG	E	I	:	IIEIH	IIEG	EIF	IEE	FEII	PFEa
FF	TFH	OH	EIG	E	I	:	IIEIH	IIEG	EIF	IEE	FEIH	PFEa
FG	TFI	SG	EHI	G	G	^	G E F	GFJG	EIH	FEIG	GGF	PGE
FH	TFI	SG	EUF	FE	I	:	G E H	GFJG	EIH	FEIG	GEI	PGE
FI	TFI	SG	E GF	FE	H	^	G E H	GFJG	EIH	FEIG	GEIF	PGE
FI	TFI	SG	EIJ	E	I	^	FI EI	GFJG	EIH	FE E	F	PGE
FI	TFI	SG	EIG	E	H	^	FI EH	GEUH	EII	FEU	GGJ	PGE
FI	TFJ	SG	EHI	E	H	^	FI EH	GEUH	EII	FEU	GGJ	PGE
FI	TGE	UQ	EI	G	I	:	G EIH	HGFH	FEIG	FEIG	GE G	PFEa
FJ	TGF	UQ	EIH	H	H	:	G EIH	HGFH	FEIG	FEIG	GGI	PFEa
GE	TGG	UQ	EI	E	H	:	G EIH	HGFH	FEIG	FEIG	GGI	PFEa
GF	TGH	UQ	EIG	H	I	:	G EIH	HGFH	FEIG	FEIG	GGG	PFEa
GG	TG	UQ	EIG	H	I	:	I EI	GEJH	FE E	FE E	FEH	PFEa
GH	UUE	UQ	EI	H	H	:	G E E	HGFH	FEIG	FEIG	FEII	PFEa
G	UUE	UQ	EIJ	E	H	:	G E G	HGFH	FEIG	FEIG	FEIH	PFEa
G	TG	UQ	EI	E	H	:	G EIH	HGFH	FEIG	FEIG	GGJ	PFEa
G	UUE	UQ	EII	I	I	:	FI EI	HGFH	FEIG	FEIG	HEI	PFEa
G	TGP	UQ	EII	FE	H	^	FI EI	FG EII	FEII	FHEI	FEIH	PFEa
G	TG	P	EIJ	FE	I	^	FI EI	FG EII	FEII	FHEI	FEIG	PFEa



Code Check (Env)	
Black	No Calc
Red	> 1.0
Orange	50-1.0
Green	75-50
Blue	50-75
Purple	0-50

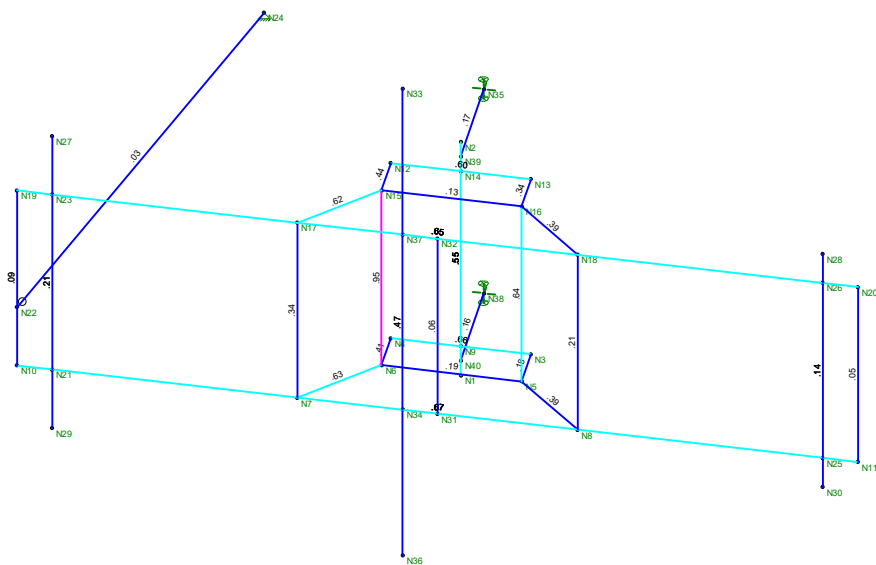

Member Code Checks Displayed (Enveloped)
Envelope Only Solution

Centek	CTHA826A - AMA Member Unity Check	SK - 2
FJP		Oct 12, 2021 at 10:28 AM
21005.31		CTHA826A_AMA.r3d

RADIO FREQUENCY EMISSIONS ANALYSIS REPORT
EVALUATION OF HUMAN EXPOSURE POTENTIAL
TO NON-IONIZING EMISSIONS

T-Mobile Existing Facility

Site ID: CTHA826A

9 South Road
Stafford Springs, Connecticut 06077

December 30, 2021

EBI Project Number: 6221008012

Site Compliance Summary	
Compliance Status:	COMPLIANT
Site total MPE% of FCC general population allowable limit:	12.95%

December 30, 2021

T-Mobile

Attn: Jason Overbey, RF Manager
35 Griffin Road South
Bloomfield, Connecticut 06002

Emissions Analysis for Site: CTHA826A

EBI Consulting was directed to analyze the proposed T-Mobile facility located at **9 South Road in Stafford Springs, Connecticut** for the purpose of determining whether the emissions from the Proposed T-Mobile Antenna Installation located on this property are within specified federal limits.

All information used in this report was analyzed as a percentage of current Maximum Permissible Exposure (% MPE) as listed in the FCC OET Bulletin 65 Edition 97-01 and ANSI/IEEE Std C95.1. The FCC regulates Maximum Permissible Exposure in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The number of $\mu\text{W}/\text{cm}^2$ calculated at each sample point is called the power density. The exposure limit for power density varies depending upon the frequencies being utilized. Wireless Carriers and Paging Services use different frequency bands each with different exposure limits; therefore, it is necessary to report results and limits in terms of percent MPE rather than power density.

All results were compared to the FCC (Federal Communications Commission) radio frequency exposure rules, 47 CFR 1.1307(b)(1) – (b)(3), to determine compliance with the Maximum Permissible Exposure (MPE) limits for General Population/Uncontrolled environments as defined below.

General population/uncontrolled exposure limits apply to situations in which the general population may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general population would always be considered under this category when exposure is not employment related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Public exposure to radio frequencies is regulated and enforced in units of microwatts per square centimeter ($\mu\text{W}/\text{cm}^2$). The general population exposure limits for the 600 MHz and 700 MHz frequency bands are approximately $400 \mu\text{W}/\text{cm}^2$ and $467 \mu\text{W}/\text{cm}^2$, respectively. The general population exposure limit for the 1900 MHz (PCS), 2100 MHz (AWS) and 11 GHz frequency bands is $1000 \mu\text{W}/\text{cm}^2$. Because each carrier will be using different frequency bands, and each frequency band has different exposure limits, it is necessary to report percent of MPE rather than power density.

Occupational/controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general population/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Additional details can be found in FCC OET 65.

CALCULATIONS

Calculations were done for the proposed T-Mobile Wireless antenna facility located at 9 South Road in Stafford Springs, Connecticut using the equipment information listed below. All calculations were performed per the specifications under FCC OET 65. Since T-Mobile is proposing highly focused directional panel antennas, which project most of the emitted energy out toward the horizon, all calculations were performed assuming a lobe representing the maximum gain of the antenna per the antenna manufacturer's supplied specifications, minus 10 dB for directional panel antennas and 20 dB for highly focused parabolic microwave dishes, was focused at the base of the tower. For this report, the sample point is the top of a 6-foot person standing at the base of the tower. For power density calculations, the broadcast footprint of the AIR6449 antenna has been considered. Due to the beamforming nature of this antenna, the actual beam locations vary depending on demand and are narrow in nature. Using the broadcast footprint accounts for the potential location of beams at any given time.

For all calculations, all equipment was calculated using the following assumptions:

- 1) 2 LTE channels (600 MHz Band) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel.
- 2) 1 NR channel (600 MHz Band) was considered for each sector of the proposed installation. This Channel has a transmit power of 80 Watts.
- 3) 2 LTE channels (700 MHz Band) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel.
- 4) 4 GSM channels (PCS Band - 1900 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 30 Watts per Channel.
- 5) 2 LTE channels (PCS Band - 1900 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 60 Watts per Channel.

- 6) 2 LTE channels (AWS Band – 2100 MHz) were considered for each sector of the proposed installation. These Channels have a transmit power of 60 Watts per Channel.
- 7) 1 LTE Traffic channel (LTE IC and 2C BRS Band - 2500 MHz) was considered for each sector of the proposed installation. This Channel has a transmit power of 60 Watts.
- 8) 1 LTE Broadcast channel (LTE IC and 2C BRS Band - 2500 MHz) was considered for each sector of the proposed installation. This Channel has a transmit power of 20 Watts.
- 9) 1 NR Traffic channel (BRS Band - 2500 MHz) was considered for each sector of the proposed installation. This Channel has a transmit power of 120 Watts.
- 10) 1 NR Broadcast channel (BRS Band - 2500 MHz) was considered for each sector of the proposed installation. This Channel has a transmit power of 40 Watts.
- 11) All radios at the proposed installation were considered to be running at full power and were uncombined in their RF transmissions paths per carrier prescribed configuration. Per FCC OET Bulletin No. 65 - Edition 97-01 recommendations to achieve the maximum anticipated value at each sample point, all power levels emitting from the proposed antenna installation are increased by a factor of 2.56 to account for possible in-phase reflections from the surrounding environment. This is rarely the case, and if so, is never continuous.
- 12) For the following calculations, the sample point was the top of a 6-foot person standing at the base of the tower. The maximum gain of the antenna per the antenna manufacturer's supplied specifications, minus 10 dB for directional panel antennas and 20 dB for highly focused parabolic microwave dishes, was used in this direction. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.
- 13) The antennas used in this modeling are the Ericsson AIR 6449 for the 2500 MHz / 2500 MHz / 2500 MHz / 2500 MHz channel(s), the RFS APXVAARR24_43-U-NA20 for the 600 MHz / 600 MHz / 700 MHz channel(s), the Commscope VV-65A-RI for the 1900 MHz / 1900 MHz / 2100 MHz channel(s) in Sector A, the Ericsson AIR 6449 for the 2500 MHz / 2500 MHz / 2500 MHz / 2500 MHz channel(s), the RFS APXVAARR24_43-U-NA20 for the 600 MHz / 600 MHz / 700 MHz channel(s), the Commscope VV-65A-RI for the 1900 MHz / 1900 MHz / 2100 MHz channel(s) in Sector B, the Ericsson AIR 6449 for the 2500 MHz / 2500 MHz / 2500 MHz / 2500 MHz channel(s), the RFS APXVAARR24_43-U-NA20 for the 600 MHz / 600 MHz / 700 MHz channel(s), the Commscope VV-65A-RI for the 1900 MHz / 1900 MHz / 2100 MHz channel(s) in Sector C. This is based on feedback from the carrier with regard to anticipated antenna selection. All Antenna gain values and associated transmit power levels

are shown in the Site Inventory and Power Data table below. The maximum gain of the antenna per the antenna manufacturer's supplied specifications, minus 10 dB for directional panel antennas and 20 dB for highly focused parabolic microwave dishes, was used for all calculations. This value is a very conservative estimate as gain reductions for these particular antennas are typically much higher in this direction.

- 14) The antenna mounting height centerline of the proposed antennas is 180 feet above ground level (AGL).
- 15) Emissions values for additional carriers were taken from the Connecticut Siting Council active database. Values in this database are provided by the individual carriers themselves.
- 16) All calculations were done with respect to uncontrolled / general population threshold limits.

T-Mobile Site Inventory and Power Data

Sector:	A	Sector:	B	Sector:	C
Antenna #:	1	Antenna #:	1	Antenna #:	1
Make / Model:	Ericsson AIR 6449	Make / Model:	Ericsson AIR 6449	Make / Model:	Ericsson AIR 6449
Frequency Bands:	2500 MHz / 2500 MHz / 2500 MHz / 2500 MHz	Frequency Bands:	2500 MHz / 2500 MHz / 2500 MHz	Frequency Bands:	2500 MHz / 2500 MHz / 2500 MHz
Gain:	22.65 dBd / 17.3 dBd / 22.65 dBd / 17.3 dBd	Gain:	22.65 dBd / 17.3 dBd / 22.65 dBd / 17.3 dBd	Gain:	22.65 dBd / 17.3 dBd / 22.65 dBd / 17.3 dBd
Height (AGL):	180 feet	Height (AGL):	180 feet	Height (AGL):	180 feet
Channel Count:	4	Channel Count:	4	Channel Count:	4
Total TX Power (W):	240 Watts	Total TX Power (W):	240 Watts	Total TX Power (W):	240 Watts
ERP (W):	36,356.09	ERP (W):	36,356.09	ERP (W):	36,356.09
Antenna A1 MPE %:	4.32%	Antenna B1 MPE %:	4.32%	Antenna C1 MPE %:	4.32%
Antenna #:	2	Antenna #:	2	Antenna #:	2
Make / Model:	RFS APXVAARR24_43-U-NA20	Make / Model:	RFS APXVAARR24_43-U-NA20	Make / Model:	RFS APXVAARR24_43-U-NA20
Frequency Bands:	600 MHz / 600 MHz / 700 MHz	Frequency Bands:	600 MHz / 600 MHz / 700 MHz	Frequency Bands:	600 MHz / 600 MHz / 700 MHz
Gain:	12.95 dBd / 12.95 dBd / 13.35 dBd	Gain:	12.95 dBd / 12.95 dBd / 13.35 dBd	Gain:	12.95 dBd / 12.95 dBd / 13.35 dBd
Height (AGL):	180 feet	Height (AGL):	180 feet	Height (AGL):	180 feet
Channel Count:	5	Channel Count:	5	Channel Count:	5
Total TX Power (W):	200 Watts	Total TX Power (W):	200 Watts	Total TX Power (W):	200 Watts
ERP (W):	4,059.02	ERP (W):	4,059.02	ERP (W):	4,059.02
Antenna A2 MPE %:	1.15%	Antenna B2 MPE %:	1.15%	Antenna C2 MPE %:	1.15%
Antenna #:	3	Antenna #:	3	Antenna #:	3
Make / Model:	Commscope VV-65A-RI	Make / Model:	Commscope VV-65A-RI	Make / Model:	Commscope VV-65A-RI
Frequency Bands:	1900 MHz / 1900 MHz / 2100 MHz	Frequency Bands:	1900 MHz / 1900 MHz / 2100 MHz	Frequency Bands:	1900 MHz / 1900 MHz / 2100 MHz
Gain:	15.55 dBd / 15.55 dBd / 16.05 dBd	Gain:	15.55 dBd / 15.55 dBd / 16.05 dBd	Gain:	15.55 dBd / 15.55 dBd / 16.05 dBd
Height (AGL):	180 feet	Height (AGL):	180 feet	Height (AGL):	180 feet
Channel Count:	8	Channel Count:	8	Channel Count:	8
Total TX Power (W):	360 Watts	Total TX Power (W):	360 Watts	Total TX Power (W):	360 Watts
ERP (W):	13,446.73	ERP (W):	13,446.73	ERP (W):	13,446.73
Antenna A3 MPE %:	1.60%	Antenna B3 MPE %:	1.60%	Antenna C3 MPE %:	1.60%

Site Composite MPE %	
Carrier	MPE %
T-Mobile (Max at Sector A):	7.06%
AT&T	3.86%
Verizon	2.03%
Site Total MPE % :	12.95%

T-Mobile MPE % Per Sector	
T-Mobile Sector A Total:	7.06%
T-Mobile Sector B Total:	7.06%
T-Mobile Sector C Total:	7.06%
Site Total MPE % :	12.95%

T-Mobile Maximum MPE Power Values (Sector A)

T-Mobile Frequency Band / Technology (Sector A)	# Channels	Watts ERP (Per Channel)	Height (feet)	Total Power Density ($\mu\text{W}/\text{cm}^2$)	Frequency (MHz)	Allowable MPE ($\mu\text{W}/\text{cm}^2$)	Calculated % MPE
T-Mobile 2500 MHz LTE IC & 2C Traffic	1	11044.63	180.0	13.12	2500 MHz LTE IC & 2C Traffic	1000	1.31%
T-Mobile 2500 MHz LTE IC & 2C Broadcast	1	1074.06	180.0	1.28	2500 MHz LTE IC & 2C Broadcast	1000	0.13%
T-Mobile 2500 MHz NR Traffic	1	22089.26	180.0	26.23	2500 MHz NR Traffic	1000	2.62%
T-Mobile 2500 MHz NR Broadcast	1	2148.13	180.0	2.55	2500 MHz NR Broadcast	1000	0.26%
T-Mobile 600 MHz LTE	2	591.73	180.0	1.41	600 MHz LTE	400	0.35%
T-Mobile 600 MHz NR	1	1577.94	180.0	1.87	600 MHz NR	400	0.47%
T-Mobile 700 MHz LTE	2	648.82	180.0	1.54	700 MHz LTE	467	0.33%
T-Mobile 1900 MHz GSM	4	1076.77	180.0	5.11	1900 MHz GSM	1000	0.51%
T-Mobile 1900 MHz LTE	2	2153.53	180.0	5.11	1900 MHz LTE	1000	0.51%
T-Mobile 2100 MHz LTE	2	2416.30	180.0	5.74	2100 MHz LTE	1000	0.57%
						Total:	7.06%

• NOTE: Totals may vary by approximately 0.01% due to summation of remainders in calculations.

Summary

All calculations performed for this analysis yielded results that were **within** the allowable limits for general population exposure to RF Emissions.

The anticipated maximum composite contributions from the T-Mobile facility as well as the site composite emissions value with regards to compliance with FCC's allowable limits for general population exposure to RF Emissions are shown here:

T-Mobile Sector	Power Density Value (%)
Sector A:	7.06%
Sector B:	7.06%
Sector C:	7.06%
T-Mobile Maximum MPE % (Sector A):	7.06%
Site Total:	12.95%
Site Compliance Status:	COMPLIANT

The anticipated composite MPE value for this site assuming all carriers present is **12.95%** of the allowable FCC established general population limit sampled at the ground level. This is based upon values listed in the Connecticut Siting Council database for existing carrier emissions.

FCC guidelines state that if a site is found to be out of compliance (over allowable thresholds), that carriers over a 5% contribution to the composite value will require measures to bring the site into compliance. For this facility, the composite values calculated were well within the allowable 100% threshold standard per the federal government.