

445 Hamilton Avenue, 14th Floor White Plains, New York 10601 T 914 761 1300 F 914 761 5372 cuddyfeder.com

Lucia Chiocchio lchiocchio@cuddyfeder.com

3/18/20
BY OVERNIGHT FED EX
Melanie A. Bachman
Executive Director
Connecticut Siting Council
10 Franklin Square
New Britain, CT 06051

Re:

New Cingular Wireless PCS, LLC ("AT&T")

Notice of Exempt Modification Emergency Back-up Generator

2 Richard Road (218 Wheeler Road), Torrington, CT 06790

Lat.: 41.7806°; Long.:-72.1362°

Dear Ms. Bachman:

This letter and enclosures are respectfully submitted on behalf of New Cingular Wireless PCS, LLC ("AT&T"). AT&T currently maintains its wireless telecommunications facility at 2 Richard Road in the City of Torrington, Connecticut. Lucille Lefebvre is the owner of the underlying property and Crown Castle is the owner of the tower. AT&T submits this letter and enclosures to the Connecticut Siting Council ("Council") to notify the Council of AT&T's intent to perform modifications to the existing facility that do not have substantial adverse environmental effects and thus do not require a certificate pursuant to Section 16-50k of the Connecticut General Statutes.

AT&T intends to install one (1) new Generac 30kW Diesel Generator within the existing grade-level fenced equipment compound as demonstrated on the plans enclosed as Attachment 1. AT&T's existing facility supports its FirstNet program which provides first responders with priority access to AT&T's network to ensure adequate communication capabilities in the event of emergency. AT&T's proposed generator will ensure that critical communication capability for first responders and the public are not lost in the event of a loss of power.

AT&T's proposed generator will also advance the State's goal of natural disaster and emergency preparedness. As discussed in the Council's Docket 432 Findings and Report and Docket 440 proceedings and Findings of Fact (Nos. 76-77), in response to two significant storm events in

WESTCHESTER | NEW YORK CITY | HUDSON VALLEY | CONNECTICUT



2011, the State formed a Two Storm Panel (the "Panel") that evaluated Connecticut's approach to planning and mitigation of impacts associated with emergencies and natural disasters. The Panel found that "wireless telecommunications service providers were not prepared to serve residential and business customers during a power outage" because certain companies had limited backup generator capacity.¹ The Panel also noted that "[t]he failure of a large portion of Connecticut's telecommunications system during the two storms is a life safety issue." The Panel recommended that State regulatory bodies review "telecommunications services currently in place to verify that the vendors have sufficient generator and backhaul capacity to meet the emergency needs of consumers and businesses" and that the "Connecticut Siting Council should require continuity of service plans for any cellular tower to be erected."² The planned modifications will ensure continuity of services by reinforcing AT&T's back-up power and backhaul capacity to meet the emergency needs of first responders, consumers and businesses in the event of a power outage.

The planned modifications to the facility fall squarely within the activities explicitly provided for in R.C.S.A. § 16-50j-72(b)(2) as the planned modifications:

- Will not result in an increase in the height of the existing structure;
- Will not require the extension of the site boundary;
- Will not increase noise levels at the facility by more than six decibels or more, or to levels that exceed state or local criteria since emergency backup generators are exempt from noise regulations as "noise created as a result of, or relating to, an emergency";³
- Will not increase radio frequency emission at the facility to a level at or above the Federal Communications Commission safety standards;
- Will not cause a change or alteration in the physical or environmental characteristics of the site; and
- Will not impair the structural integrity of the facility.

The original approval documents were not able to located at the time of this this application. Nonetheless, the Council has approved several exempt modifications for AT&T as well as other carriers since the tower came under the Council's jurisdiction. We further assert that this modification constitutes an eligible facilities request pursuant to federal law and regulations regardless of approval conditions. Federal regulations specifically permit the installation of back-

¹ See Council Administrative Notice Item No. 39

² See Council Administrative Notice Item No. 39.

³ R.C.S.A. § 22a-69-1.8.



up power supplies at existing facilities⁴ and such installation only creates a "significant change" if "it does not comply with conditions associated with the siting approval...provided however that this limitation does not apply to any modification that is non-compliant only in a manner that would exceed the thresholds identified" in the federal regulations.⁵ Since AT&T only proposes to install a new generator, such installation is not non-compliant in any manner that exceeds the federal thresholds.

The proposed modifications will have no impact on the existing tower structure itself or the radiofrequency emissions as the proposed modifications only consist of the addition of one new generator within the grade-level fenced equipment compound. Thus, AT&T respectfully requests a waiver from submission of information relating to the existing tower structure or the radiofrequency emissions.

Please accept this letter as notification pursuant to R.C.S.A. § 16-50j-73 for construction that constitutes an exempt modification pursuant to R.C.S.A. § 16-50j-73. In accordance with R.C.S.A. § 16-50j-73, a copy of this letter and enclosure are being sent to the City of Torrington Mayor Elinor Carbone as well as the property owner and structure owner identified above. Proof of notification is enclosed as Attachment 2.

For the foregoing reasons, AT&T respectfully submits that the proposed modification to the above referenced wireless telecommunications facility constitutes an exempt modification under R.C.S.A. § 16-50j-72(b)(2).

Very truly yours,

Lucia Chiocchio

Attachments

cc: Mayor Elinor Carbone, City of Torrington Crown Castle, Tower Owner Lucille Lefebvre, Property Owner

Lucia Chrocchio

⁴ 47 CFR § 1.6100(b)(3)(i); 47 CFR § 1.6100(b)(8).

⁵ 47 CFR § 1.6100(b)(7)(vi).



3/18/20 Page -4-

AT&T

General Dynamics Information Technology Daniel Patrick, Esq. & Julie Durkin, Cuddy & Feder, LLP

ATTACHMENT 1



at&t Mobility

SITE NAME: TORRINGTON CT WHEELER RD FA LOCATION CODE: 10128238

GENERATOR PROJECT 30KW GENERAC DIESEL GENERATOR 200A GENERAC ATS

2 RICHARD RD TORRINGTON, CT 06790

VICINITY MAP SITE LOCATION Richards Hydraulic Dump Truck Grate Wall of Fire Q

AERIAL VIEW OF SITE

SCOPE OF WORK

ADD STANDBY GENERATOR, ASSOCIATED CONCRETE PAD, AND UTILITY EQUIPMENT TO EXISTING AT&T EQUIPMENT AREA. THERE WILL BE NO CHANGE IN THE SIZE OR HEIGHT OF THE TOWER OR ANTENNAS.

TO OBTAIN LOCATION OF PARTICIPANTS' UNDERGROUND FACILITIES BEFORE YOU DIG IN CONNECTICUT

CALL BEFORE YOU DIG 811 OR 1-800-922-4455

CONNECTICUT PUBLIC ACT 87-71 REQUIRES MIN. 2 WORKING DAYS NOTICE BEFORE YOU EXCAVATE.

APPLICABLE BUILDING CODE \$ STANDARDS

ALL WORK AND MATERIALS SHALL BE PERFORMED AND INSTALLED IN ACCORDANCE WITH THE CURREN' EDITION OF THE FOLLOWING CODES AS ADOPTED BY THE GOVERNING LOCAL AUTHORITIES. NOTHING N THESE PLANS ARE TO BE CONSTRUCTED TO PERMIT WORK NOT CONFORMING TO THESE CODES:

- INTERNATIONAL BUILDING CODE 2015
- . NATIONAL ELECTRIC CODE 2017
- 3. AMERICAN CONCRETE INSTITUTE (ACI) 318, BUILDING CODE REQUIREMENTS FOR STRUCTURAL
- 4. AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC), MANUAL OF STEEL CONSTRUCTION
- . TELECOMMUNICATIONS INDUSTRY ASSOCIATION (TIA) 222-G, STRUCTURAL STANDARDS FOR STEEL OWER AND ANTENNA SUPPORTING STRUCTURES
- . TIA 607, COMMERCIAL BUILDING GROUNDING AND BONDING REQUIREMENTS FOR

1 PROJECT INFORMATION

PROJECT MANAGER:

JOF JARVIS

MARKET LEAD GENERAL DYNAMICS WIRELESS SERVICES

661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406 joseph.jarvis@gdit.com

ENGINEER:

RAMAKER & ASSOCIATES, INC. 855 COMMUNITY DRIVE SAUK CITY, WI 53583 PH.: (608) 643-4100 FAX: (608) 643-7999

APPLICANT INFORMATION:

SITE NAME: TORRINGTON CT WHEELER RD FA NUMBER: 10128238

TOWER OWNER:

CONTRACTOR SHALL VERIFY ALL PLANS & EXISTIN DIMENSIONS & CONDITIONS ON THE JOB SITE & SHALL IMMEDIATELY NOTIFY THE ENGINEER IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK OR BE RESPONSIBLE FOR SAME.

THE INFORMATION CONTAINED IN THIS SET OF

SHEET INDEX

GENERAL:

T-I TITLE SHEET

NOTES:

N-I GENERAL NOTES

A-I SITE PLAN
A-2 EXHAUST EXTENSION DETAIL
S-I FOUNDATION DETAILS

ELECTRICAL & GROUNDING:

- E- I WIRING DETAILS
- PANEL AND PENETRATION DETAILS ATS, CONDUIT & GROUND ROD DETAILS
- GENERAC GENERATOR SPECIFICATIONS E-4. I GENERAC GENERATOR SPECIFICATIONS
- E-4.2 GENERAC GENERATOR SPECIFICATIONS GENERAC ATS SPECIFICATIONS
- E-5. I GENERAC ATS SPECIFICATIONS

SIGNATURE BLOCK

AT¢T MGR. DATE

GENERAL DYNAMICS DATE

CONSTRUCTION MGR.

SITE ACQUISITION

Information Technology, Inc. GENERAL DYNAMICS

CONSULTANT:

PREPARED FOR:

661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensec Professional Engineer under the laws of the State of Connecticut.

GENERAL DYNAMICS

855 Community Dr, Sauk City, WI 53583 608-643-4100 www.Ramaker.com

Sauk City, WI • Willmar, MN Woodcliff Lake, NJ · Bayamon, PR



DATE 2/24/2020

TORRINGTON CT WHEELER RD FA ID # 10128238

2 RICHARD RD TORRINGTON, CT 06790

TITLE SHEET

SCALE: NONE

46519

2000 CORPORATE DR, 11TH FLOOR CANONSBURG, PA 15317 PROPERTY OWNER LUCILLE LEFEBVRE AND ROBERT LEFEBVRE 218 WHEELER ROAD LITCHFIELD, CT 06759 ADDRESS: 2 RICHARD RD TORRINGTON, CT 06790 CONTACT: TYLER BEATTY COUNTY: LITCHFIELD tbeatty@ramaker.com 41.7806° LONG.: -73.1362° GROUND ELEVATION: 1025 FT AMSL 7150 STANDARD DR HANOVER, MD 21076

RELATES TO THE CLIENT IS STRICTLY PROHIBITED.

NOTES TO SUBCONTRACTOR:

GENERAL NOTES

- . THE GENERAL SUBCONTRACTOR MUST VERIFY ALL DIMENSIONS. CONDITIONS AND ELEVATIONS BEFORE PROCEEDING WITH THE WORK. ALL WORK SHALL BE PERFORMED IN A WORKMANLIKE MANNER IN ACCORDANCE WITH ACCEPTED CONSTRUCTION PRACTICES.
- 2. IT IS THE INTENTION OF THESE DRAWINGS TO SHOW THE COMPLETED INSTALLATION. THE SUBCONTRACTOR SHALL BE RESPONSIBLE FOR ALL TEMPORARY BRACING, SHORING, TIES, FORM WORK, ETC. IN ACCORDANCE WITH ALL NATIONAL, STATE, AND LOCAL ORDINANCES, TO SAFELY EXECUTE ALL WORK AND SHALL BE RESPONSIBLE FOR SAME. ALL WORK SHALL BE IN ACCORDANCE WITH LOCAL CODES.
- 3. THE SUBCONTRACTOR SHALL USE ADEQUATE NUMBER OF SKILLED WORKMAN WHO ARE THOROUGHLY TRAINED AND EXPERIENCED IN THE NECESSARY CRAFTS AND WHO ARE COMPLETELY FAMILIAR WITH THE SPECIFIED REQUIREMENTS AND METHOD NEEDED FOR PROPER PERFORMANCE
- 4 CONSTRUCTION SUBCONTRACTOR AGREES THAT IN ACCORDANCE WITH GENERALLY ACCEPTED CONSTRUCTION PRACTICES. CONSTRUCTION SUBCONTRACTOR WILL BE REQUIRED TO ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THE PROJECT, INCLUDING THE SAFETY OF ALL PERSONS AND PROPERTY, THAT THIS REQUIREMENT SHALL BE MADE TO APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS AND CONSTRUCTION SUBCONTRACTOR FURTHER AGREES TO INDEMNIFY AND HOLD DESIGN ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH PERFORMANCE OF WORK ON THIS PROJECT
- . SITE GROUNDING SHALL COMPLY WITH AT&T WIRELESS SERVICES TECHNICAL SPECIFICATIONS FOR FACILITY GROUNDING FOR CELL SITE STANDARDS, LATEST EDITION, AND COMPLY WITH AT&T TOWERS GROUNDING CHECKLIST, LATEST VERSION. WHEN NATIONAL AND LOCAL GROUNDING CODES ARE MORE STRINGENT THEY SHALL GOVERN. GROUNDING SHALL BE COMPLETED BEFORE ERECTION OF TOWER.
- 6. ALL WORK SHALL COMPLY WITH OSHA AND STATE SAFETY REQUIREMENTS. PROCEDURES FOR THE PROTECTION OF EXCAVATIONS, EXISTING CONSTRUCTION AND UTILITIES SHALL BE ESTABLISHED PRIOR TO FOUNDATION INSTALLATION, IF TEMPORARY LIGHTING AND MARKING IS REQUIRED BY THE FEDERAL AVIATION ADMINISTRATION (FAA), IT IS THE SUBCONTRACTOR'S RESPONSIBILITY TO MAINTAIN THE NECESSARY LIGHTS AND NOTIFY THE PROPER AUTHORITIES IN THE EVENT OF A PROBLEM.
- 7. ALL WORK SHALL BE ACCOMPLISHED IN ACCORDANCE WITH ALL LOCAL, STATE, AND FEDERAL CODES OR ORDINANCES. THE MOST STRINGENT CODE WILL APPLY IN THE CASE OF DISCREPANCIES OR DIFFERENCES IN THE CODE REQUIREMENTS.
- 8. ANY DAMAGE TO THE ADJACENT PROPERTIES WILL BE CORRECTED AT THE SUBCONTRACTOR'S EXPENSE TO THE SATISFACTION OF THE LANDOWNER AND THE ENGINEER.
- 9. THE COMPLETE BID PACKAGE INCLUDES THESE CONSTRUCTION DRAWINGS ALONG WITH THE SPECIFICATIONS. SUBCONTRACTOR IS RESPONSIBLE FOR REVIEW OF TOTAL BID PACKAGE PRIOR
- IO. SUBCONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES WITHIN CONSTRUCTION LIMITS PRIOR TO CONSTRUCTION.
- I I . THE SUBCONTRACTOR IS RESPONSIBLE FOR MAINTAINING POSITIVE DRAINAGE ON THE SITE AT ALL TIMES. SILT AND EROSION CONTROL SHALL BE MAINTAINED ON THE DOWNSTREAM SIDE OF THE SITE AT ALL TIMES. ANY DAMAGE TO ADJACENT PROPERTIES WILL BE CORRECTED AT THE SUBCONTRACTOR'S EXPENSE.
- 12. CLEARING OF TREES AND VEGETATION ON THE SITE SHOULD BE HELD TO A MINIMUM. ONLY THE TREES NECESSARY FOR CONSTRUCTION OF THE FACILITIES SHALL BE REMOVED. ANY DAMAGE TO THE PROPERTY OUTSIDE THE LEASED PROPERTY SHALL BE REPAIRED BY THE SUBCONTRACTOR
- I 3. ALL SUITABLE BORROW MATERIAL FOR BACK FILL OF THE SITE SHALL BE INCLUDED IN THE BID. EXCESS TOPSOIL AND UNSUITABLE MATERIAL SHALL BE DISPOSED OF OFF SITE AT LOCATIONS APPROVED BY GOVERNING AGENCIES PRIOR TO DISPOSAL.
- I 4. SEEDING AND MULCHING OF THE SITE WILL BE ACCOMPLISHED AS SOON AS POSSIBLE AFTER. COMPLETION OF THE SITE DEVELOPMENT. THE SUBCONTRACTOR IS RESPONSIBLE FOR PROVIDING AND MAINTAIN AN ADEQUATE COVER OF VEGETATION OVER THE SITE FOR A ONE YEAR
- 15. PERMITS: THE SUBCONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING AND INCURRING THE COST OF ALL REQUIRED PERMITS, INSPECTIONS, CERTIFICATES, ETC.
- I 6. RECORD DRAWINGS: MAINTAIN A RECORD OF ALL CHANGES, SUBSTITUTIONS BETWEEN WORK AS SPECIFIED AND INSTALLED. RECORD CHANGES ON A CLEAN SET OF CONTRACT DRAWINGS WHICH SHALL BE TURNED OVER TO THE CONSTRUCTION MANAGER UPON COMPLETION OF THE PROJECT
- 17. THE PLANS SHOW SOME KNOWN SUBSURFACE STRUCTURES, ABOVE GROUND STRUCTURES AND/OR EXISTING UTILITIES BELIEVED TO BE IN THE WORKING AREA. IT IS THE RESPONSIBILITY OF THE SUBCONTRACTOR TO VERIFY ALL UTILITIES, PIPELINES AND OTHER STRUCTURES SHOWN OR NOT SHOWN ON THESE PLANS. THE SUBCONTRACTOR SHALL CONTACT THE LOCAL JURISDICTION'S DIGGER'S HOTLINE BEFORE DIGGING OR DRILLING. ANY DAMAGE TO EXISTING UTILITIES SHALL BE REPAIRED TO THE SATISFACTION OF THE OWNER AND ENGINEER AT THE SUBCONTRACTOR'S EXPENSE.

- . THIS PROPOSAL IS FOR THE ADDITION OF A NEW GENERATOR ON A CONCRETE PAD TO AN EXISTING UNMANNED TELECOMMUNICATIONS FACILITY CONSISTING OF AN EQUIPMENT SHELTER AND TOWER
- 2. THE PROPOSED FACILITY WILL BE LINMANNED AND DOES NOT REQUIRE POTABLE WATER OR SEWER SERVICE
- 3. THE PROPOSED FACILITY IS UNMANNED AND IS NOT FOR HUMAN HABITAT. (NO HANDICAP

- ACCESS IS REQUIRED)
- 4. OCCUPANCY IS LIMITED TO PERIODIC MAINTENANCE AND INSPECTION. APPROXIMATELY 2 TIMES PER MONTH BY AT&T TECHNICIANS.
- 5. OUTDOOR STORAGE AND SOLID WASTE CONTAINERS ARE NOT PROPOSED.
- G. ALL MATERIAL SHALL BE FURNISHED AND WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS
- 7. SUBCONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING ANY DAMAGE CAUSED BY THE CONSTRUCTION OPERATION
- 8. SUBCONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL PERMITS AND INSPECTION REQUIRED FOR CONSTRUCTION.
- 9. SUBCONTRACTOR SHALL REMOVE ALL TRASH AND DEBRIS FROM THE SITE ON A DAILY BASIS

ELECTRICAL NOTES A. GENERAL

- I. COORDINATE LOCATION AND POWER REQUIREMENTS OF ALL EQUIPMENT WITH AT\$T AND EQUIPMENT SUPPLIER PRIOR TO INSTALLATION.
- 2 COORDINATE LOCATION AND REQUIREMENTS FOR ELECTRICAL AND TELEPHONE SERVICES WITH THE PROPERTY REPRESENTATIVE. AT&T AND UTILITY COMPANIES. ROUTING OF CONDUITS MAY BE MODIFIED TO MEET SITE REQUIREMENTS. EXACT CONDUIT ROUTING TO
- 3. ALL WIRING AND EQUIPMENT SHOWN ON ELECTRICAL SHEETS SHALL BE FURNISHED AND INSTALLED UNDER ELECTRICAL PORTION OF CONTRACT UNLESS OTHERWISE NOTED
- 4. UNINTERRUPTED ELECTRICAL SERVICE FOR EXISTING EQUIPMENT SHALL BE MAINTAINED DURING THE INSTALLATION OF THE WORK DESCRIBED UNDER THESE DOCUMENTS TEMPORARY EQUIPMENT, CABLES AND WHATEVER ELSE IS NECESSARY SHALL BE PROVIDED AS REQUIRED TO MAINTAIN ELECTRICAL SERVICE. TEMPORARY SERVICE FACILITIES, IF REQUIRED AT ANY TIME, SHALL NOT BE DISCONNECTED OR REMOVED UNTIL NEW SERVICE EQUIPMENT IS IN PROPER OPERATION. IF ANY SERVICE OR SYSTEM MUST BE INTERRUPTED, THE CONTRACTOR SHALL REQUEST PERMISSION IN WRITING STATING THE DATE. TIME. ETC. THE SERVICE WILL BE INTERRUPTED AND THE AREAS AFFECTED. THIS REQUEST SHALL BE MADE IN SUFFICIENT TIME FOR PROPER ARRANGEMENTS TO BE MADE. WRITTEN PERMISSION SHALL BE OBTAINED FROM THE OWNER BEFORE INTERRUPTING ELECTRICAL SERVICE
- 5. COORDINATE NEW WORK WITH OTHER TRADES AND VERIFY EXISTING CONDITIONS TO AVOID INTERFERENCE. IN CASE OF INTERFERENCE, AT&T'S REPRESENTATIVE WILL DECIDE WHICH WORK IS TO BE RELOCATED. REGARDLESS OF WHICH WAS FIRST INSTALLED
- 6. THE INSTALLATION MUST COMPLY WITH NEC AND ALL FEDERAL, STATE AND LOCAL RULES AND REGULATIONS.
- 7. THE DRAWINGS ARE DIAGRAMMATIC AND INDICATE THE GENERAL ARRANGEMENT OF SYSTEMS AND FOLIPMENT UNLESS OTHERWISE DEFINED BY DIMENSIONS OR DETAILS EXACT EQUIPMENT LOCATIONS AND RACEWAY ROUTING SHALL BE GOVERNED BY ACTUAL FIELD CONDITIONS AND/OR DIRECTIONS FROM AT&T'S REPRESENTATIVE.
- 8. CONTRACTOR SHALL PAY ALL PERMITS AND FEES REQUIRED.
- 9. ALL MATERIALS SHALL BE FURNISHED AND WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE APPLICABLE SECTIONS OF THE STANDARDS REFERENCED BELOW:
 - ANSI (AMERICAN NATIONAL STANDARDS INSTITUTE)
 - ASTIM (AMERICAN SOCIETY FOR TESTING MATERIALS)
 - ETL (ELECTRICAL TESTING LABORATORY) ICEA (INSULATED CABLE ENGINEERS ASSOCIATION)
 - IEEE (INSTITUTE OF ELECTRICAL AND ELECTRONIC ENGINEERS)
 - MBFU (NATIONAL BOARD OF FIRE UNDERWRITERS)
 - NESC (NATIONAL ELECTRICAL SAFETY CODE)
 - NEMA (NATIONAL ELECTRICAL MANUFACTURER'S ASSOCIATION)
 - NFPA (NATIONAL FIRE PROTECTION ASSOCIATION)
 - UL (UNDERWRITER'S LABORATORY)
- IO. CONTRACTOR SHALL REVIEW PLANS, DETAILS AND SPECIFICATIONS IN DETAIL AND ADJUST WORK TO CONFORM WITH ACTUAL SITE CONDITIONS SO THAT ELECTRICAL DEVICES AND FOLIPMENT WILL BE LOCATED AND READILY ACCESSIBLE. QUANTITIES LISTED IN MATERIAL LISTS ON THE DRAWINGS ARE FOR INFORMATION ONLY. THE CONTRACTOR SHALL PROVIDE HIS OWN TAKEOFF FOR MATERIAL QUANTITY AND TYPES BASED ON ACTUAL SITE CONDITIONS, IN ADDITION, CONTRACTOR SHALL PROVIDE ALL NECESSARY MATERIALS TO INSTALL EQUIPMENT FURNISHED BY AT&T OR ITS SUPPLIERS. ALL ITEMS NOT SPECIFICALLY MENTIONED HEREIN OR SHOWN ON THE DRAWINGS, BUT WHICH ARE OBVIOUSLY NECESSARY TO MAKE A COMPLETE WORKING INSTALLATION, SHALL BE INCLUDED.
- II. THE CONTRACTOR OR BIDDER SHALL BEAR THE RESPONSIBILITY OF NOTIFYING (IN WRITING) AT&T'S REPRESENTATIVE OF ANY CONFLICTS PRIOR TO THE SUBMISSION OF CONTRACTOR'S PROPOSAL OR PERFORMANCE OF WORK, IN THE EVENT OF DISCREPANCIES THE CONTRACTOR SHALL PRICE THE MORE COSTLY OR EXTENSIVE WORK, UNLESS DIRECTED IN WRITING OTHERWISE.
- 12 ALL FLOORS WHERE PENETRATIONS ARE REQUIRED IN BUILDING ARE TO BE CORE DRILLED AND THEN FIREPROOFED

- I. PROVIDE PULL BOXES AND JUNCTION BOXES WHERE SHOWN OR AS REQUIRED BY CODE SUCH THAT NO MORE THAN THE EQUIVALENT OF FOUR QUARTER BENDS (380 DEGREES TOTAL) FXIST IN A CONDUIT RUN
- 2. ALL POWER AND CONTROL/INDICATION WIRING SHALL BE TYPE THHN/THWN 800V RATED 75 DEGREES CELSIUS, UNLESS NOTED OTHERWISE

- 3. SCHEDULE 80 PVC CONDUIT SHALL BE USED ABOVE GROUND, WHERE ABOVE GRADE IS DEFINED AS THE GROUND OF THE TURN-UP
- 4. BELL END OR TERMINAL ADAPTER MUST BE INSTALLED ON END OF PVC CONDUIT PER NEC 352.46, 300.4 F. (3)
- CONDUIT BENDS SHALL BE MADE IN ACCORDANCE WITH NEC TABLE 346-10. NO RIGHT ANGLE DEVICE OTHER THAN STANDARD CONDUIT ELBOWS WITH 12" MINIMUM INSIDE SWEEPS FOR ALL CONDUITS 2" OR LARGER.
- 6. POWER WIRING SIZE SHALL NOT BE SMALLER THAN #12 AWG
- 7. ALL WIRING SHALL BE COPPER. ALUMINUM WILL NOT BE ACCEPTABLE ALL POWER CIRCUITS SHALL CONTAIN A GROUND WIRE
- 8. PHASE MARKINGS TO BE USED AT POWER CONDUCTOR TERMINATIONS.
- 9. CONTRACTOR SHALL ENSURE INTEGRITY IS MAINTAINED WHEN INSTALLING CONDUIT AND WIRING.
- 10. INSTALL PULL STRING IN ALL CONDUIT
- II. FOR ROOFTOP INSTALLS AND BUILD-OUTS, CONDUITS INSIDE BUILDING AND ON ROOF SHALL BE RGS, UNLESS OTHERWISE NOTED. FOR RAW LAND SITES AND CO-LOCATES, PVC SCHEDULE 80 SHALL BE UTILIZED UNLESS NOTED OTHERWISE.
- 12. MAINTAIN MINIMUM I'-O" VERTICAL AND I'-O" HORIZONTAL SEPARATIONS FROM ANY MECHANICAL GAS PIPING.
- 13. ALL WIRING ROUTED IN PLENUM TO BE RATED OR IN METALLIC FLEX (LIQUIDITE) CONDUIT.

C. EQUIPMENT

- EQUIPMENT/PARTS CONNECTED TO EXISTING PANELS, DUCTS, ETC. SHALL MATCH THE CHARACTERISTICS (A/C, V, A) OF THAT EQUIPMENT.
- 2. ALL ELECTRICAL EQUIPMENT OUTSIDE SHALL BE NEMA OR 3R RATED.

D. GROUNDING

- ALL GROUND CONNECTIONS TO BUILDING SHALL BE MADE USING TWO-HOLE CONNECTORS PROVIDE STAINLESS STEEL BOLTS AND LOCK WASHERS ON ALL MECHANICAL GROUND CONNECTIONS
- 2 ALL FOUIPMENT SURFACES TO BE BONDED TO GROUNDING SYSTEM SHALL BE STRIPPED OF ALL PAINT AND DIRT. CONNECTIONS TO VARIOUS METALS SHALL BE OF A TYPE AS TO CAUSE A GALVANIC OR CORROSIVE REACTION. AREA SHALL BE REPAINTED FOLLOWING
- 3. ANY METALLIC ITEM WITHIN 6' OF GROUND CONDUCTORS MUST BE CONNECTED TO THE GROUNDING SYSTEM.
- 4. EXTERIOR, ABOVE GRADE GROUND CONNECTIONS SHALL BE FURNISHED WITH A LIBERAL PROTECTIVE COATING OF ANTI-OXIDE COMPOUND.
- ALL MATERIALS AND LABOR REQUIRED FOR THE GROUNDING SYSTEM AS INDICATED ON THE PLANS AND DETAILS, AND AS DESCRIBED HEREIN SHALL BE FURNISHED BY THIS CONTRACTOR LINIESS OTHERWISE NOTED
- 6 EXACT LOCATION OF GROUND CONNECTION POINTS SHALL BE DETERMINED IN FIELD. ADJUST LOCATIONS INDICATED ON PLANS ACCORDING TO ACTUAL EQUIPMENT LOCATIONS TO KEEP THE GROUND CONNECTION CABLES AS SHORT AS PRACTICAL.
- 7. PROVIDE ALL ELECTRICAL SYSTEM AND EQUIPMENT GROUNDS AS REQUIRED BY THE CURRENT EDITION OF THE NATIONAL ELECTRIC CODE (1999) AND THE CURRENT EDITION O THE NATIONAL FLECTRICAL SAFETY CODE. BONDING JUMPERS WITH APPROVED GROUND FITTINGS SHALL BE INSTALLED AT ALL RACEWAYS, EQUIPMENT ENCLOSURES, PULL BOXES, ETC. TO MAINTAIN GROUND CONTINUITY WHERE REQUIRED BY CODE
- 8. ALL EQUIPMENT GROUND CONDUCTORS SHALL BE TIN COATED, #2 AWG COPPER UNLESS NOTED OTHERWISE ON THE DRAWINGS.
- 9. PROVIDE PRE AND POST GROUND TEST RESULTS, USING CLAMP-ON TESTER. TEST RESULTS SHALL BE PHOTOS WITH DIGITAL TIME AND GPS STAMPED/EMBEDDED.

E. INSPECTION/DOCUMENTATION

- I. THE CONTRACTOR, UPON COMPLETION OF HIS WORK, SHALL PROVIDE AS-BUILT DRAWINGS INFORMATION SHOULD BE GIVEN TO THE GENERAL CONTRACTOR FOR INCLUSION IN FINAL AS-BUILT SURVEY DOCUMENTS TO BE GIVEN TO THE OWNER.
- 2. CONTRACTOR SHALL SUPPLY DOCUMENTATION ATTESTING TO THE COMPLETE GROUND SYSTEM'S RECEPTIVITY (MAX. 5 OHMS).
- 3. AN ELECTRICAL INSPECTION SHALL BE MADE BY AND INSPECTING AGENCY APPROVED BY AT&T'S REPRESENTATIVE. CONTRACTOR SHALL COORDINATE ALL INSPECTIONS AND OBTAIN POWER COMPANY APPROVAL.
- 4. CONTRACTOR SHALL HAVE ATS AND GENERATOR RELAY INSTALLATION AND CONNECTIONS INSPECTED BY OTHERS TO ENSURE THAT UL LISTING FOR THAT EQUIPMENT IS NOT VOIDED



855 Community Dr, Sauk City, WI 53583 608-643-4100 www.Ramaker.com

Sauk City, WI • Willmar, MN Woodcliff Lake, NJ · Bayamon, PR

PREPARED FOR:



CONSULTANT:


GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

ertification \$ Seal

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensec Professional Engineer under the laws of the State of <u>Connecticut</u>.



FINAL

TORRINGTON CT WHEELER RD

FAID#10128238


DATE 2/24/2020


RICHARD RD TORRINGTON, CT 06790


GENERAL NOTES

SCALE: NONE

46519 N- I SHEET

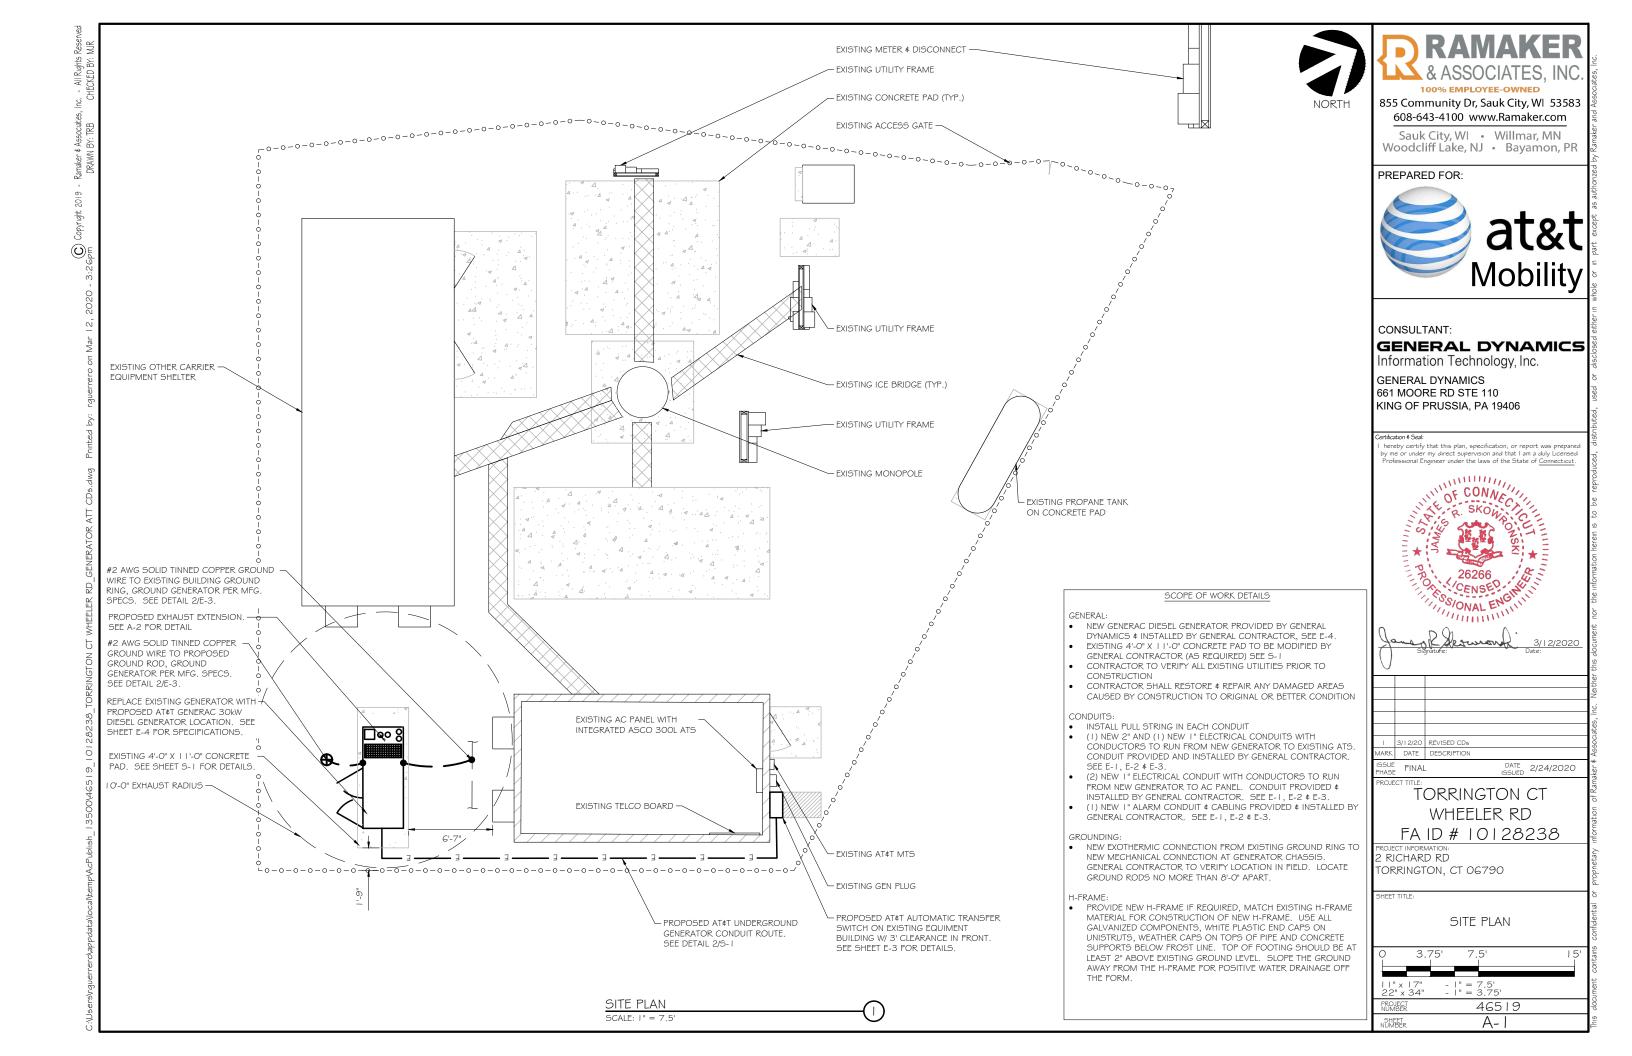

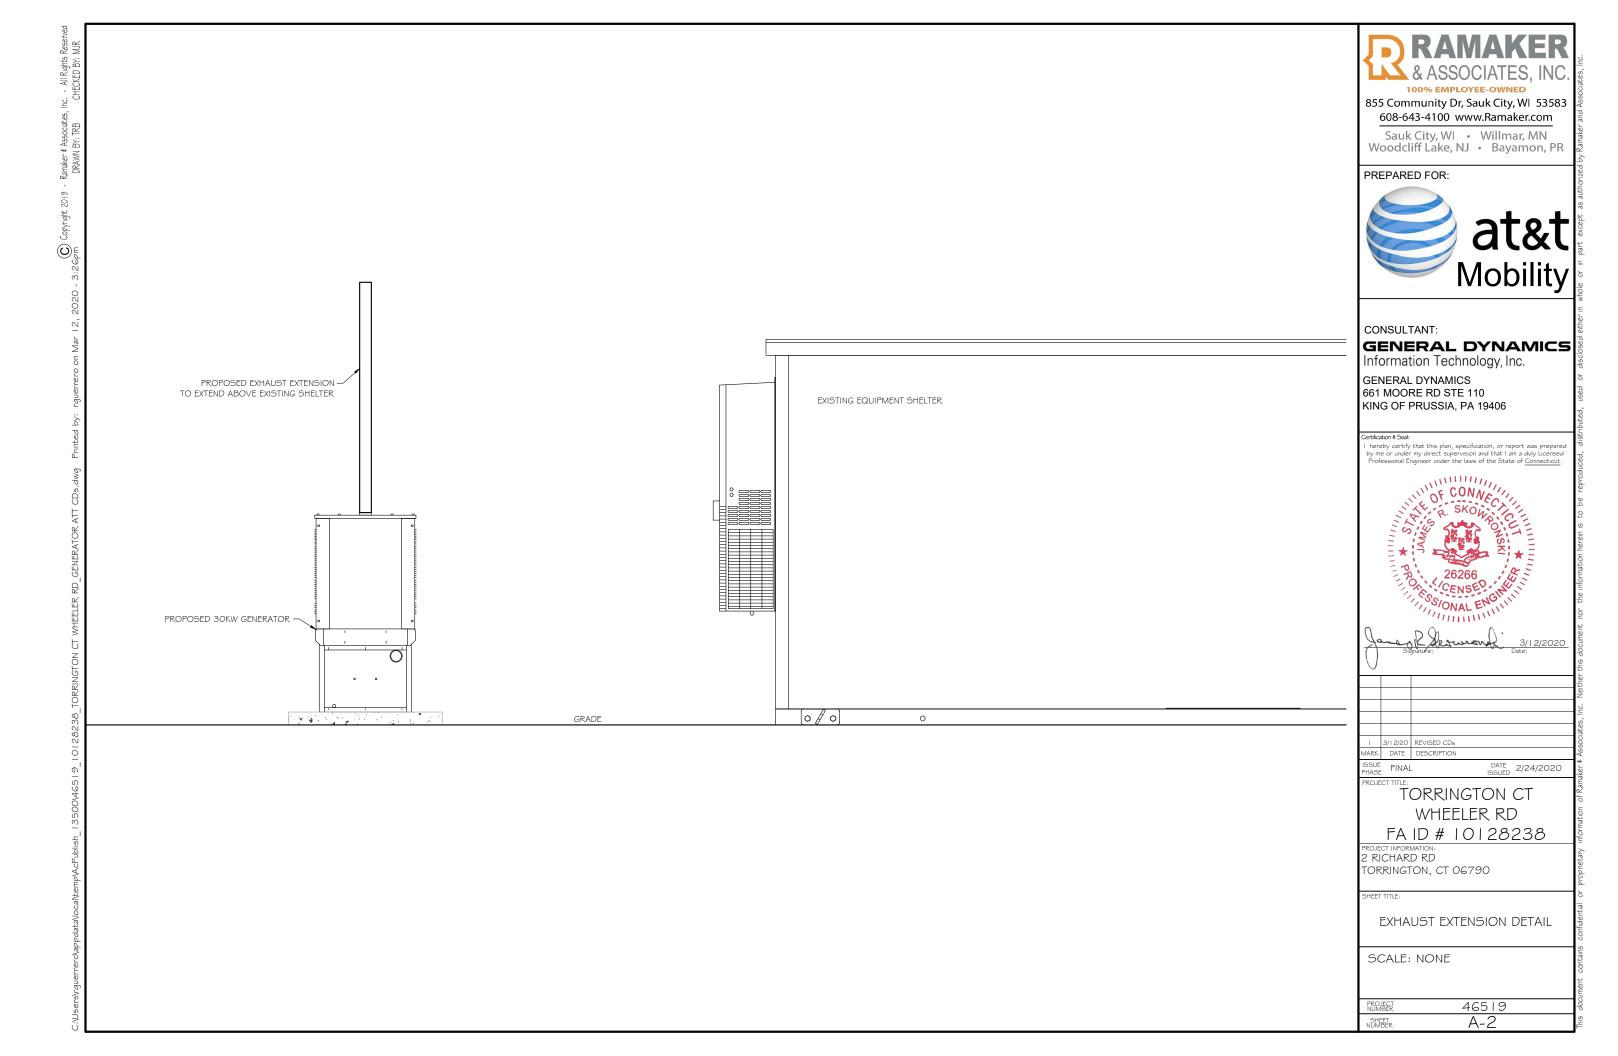

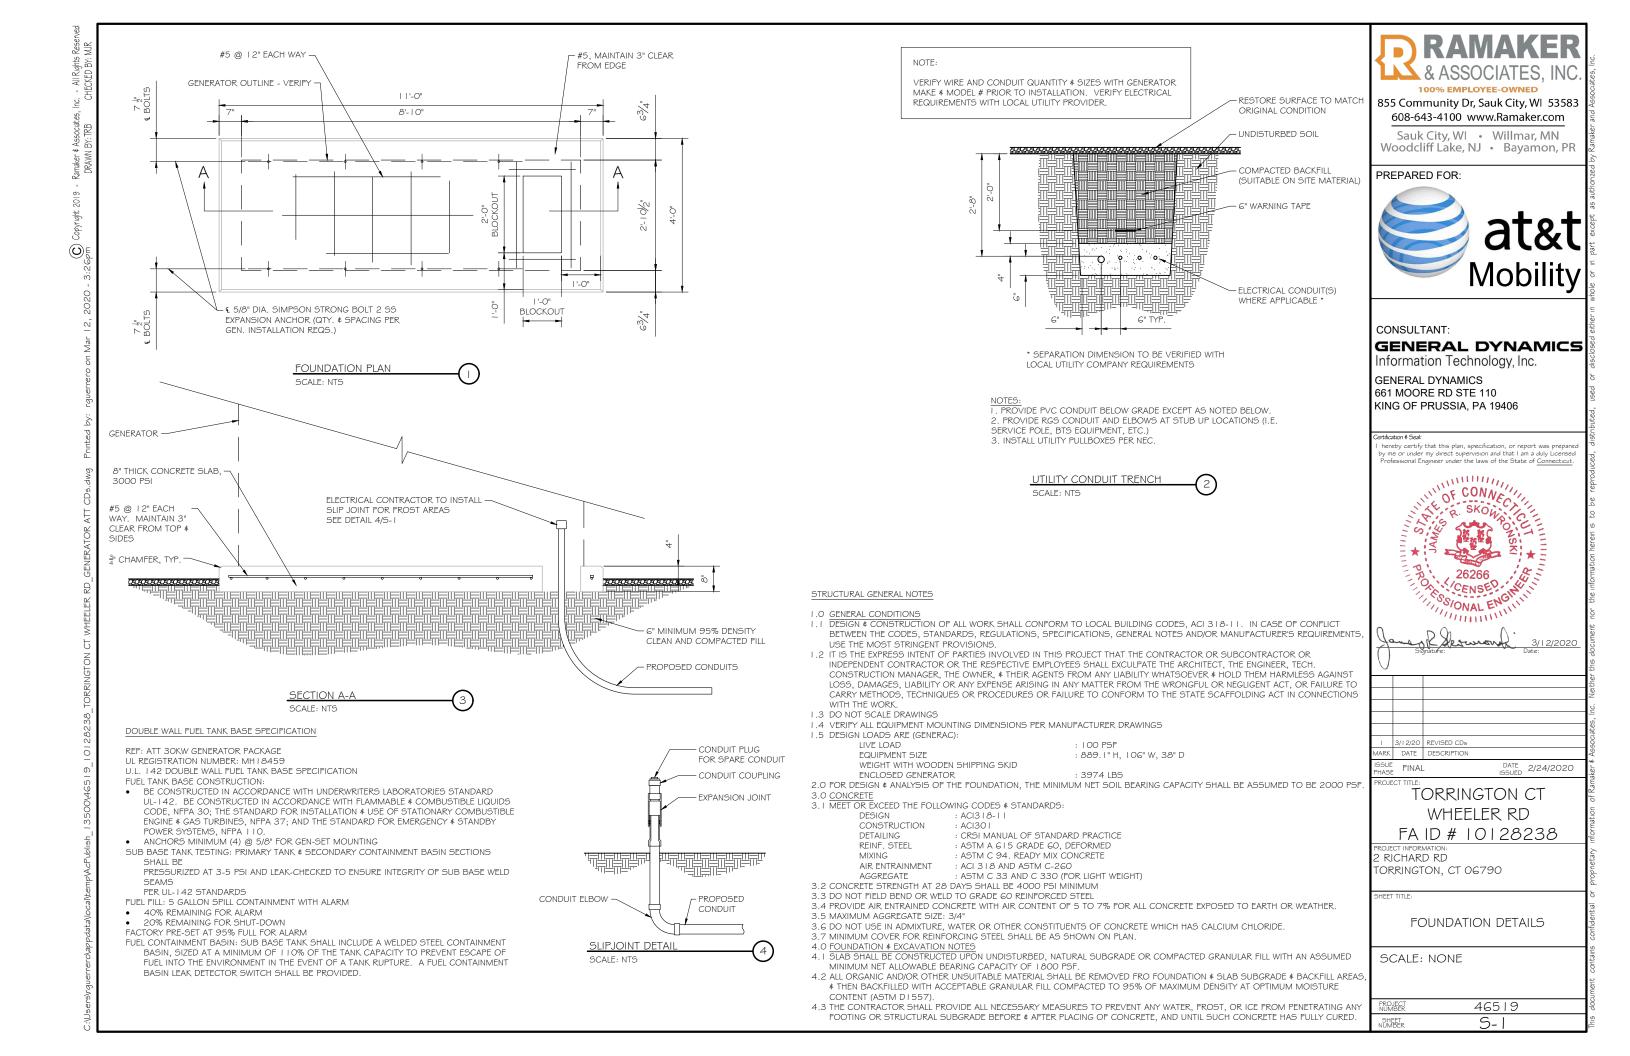

NO.	FROM	ТО	WIRES	GROUND	CONDUIT SIZE	FUNCTION
	NORMAL POWER SOURCE	AUTOMATIC TRANSFER SWITCH	(3) 3/0	(1) #4	2"	NORMAL POWER FEEDER TO ATS (CUT BACK EXISTING)
2	AUTOMATIC TRANSFER SWITCH	LOAD CENTER	(3) 3/0	(1) #4	2"	POWER FEEDER FROM ATS TO PANEL
3	GENERATOR MTS	MTS ATS	(3) #2	(1) #6	I ½"	EMERGENCY POWER FEEDER TO ATS
4	AUTOMATIC TRANSFER SWITCH	GENERATOR	(2) #10	(1) #10	1"	START CIRCUIT
5	LOAD CENTER (DISTRIBUTION CENTER)	GENERATOR, ATS	(2) #12 (2) #12 (2) #12	(I) #I2 (I) #I2 (I) #I2	" " "	CIRCUIT FOR GENERATOR BLOCK HEATER \$ BATTERY HEATER CIRCUIT FOR BATTERY CHARGER CIRCUIT FOR AT5
6	ALARM BLOCK	GENERATOR	I 2-PAIR 24 AWG OR 2EA G-PAIR CAT5	N/A	1"	ALARM CABLES (1) I 2 PAIR 24 AWG (RUN THRU INTERIOR OF SHELTER \$ INTO ALARM BOX. PROVIDE 24" OF SLACK CABLE. FINAL PUNCH DOWN IS BY AT\$T TECH. LABEL ALL WIRES

CIRCUIT DETAIL SCALE: NTS

	WIRE	ALARM
	BROWN BROWN / WHITE	GENERATOR RUNNING
	GREEN GREEN / WHITE	CRITICAL FAULT
	BLUE BLUE / WHITE	MINOR FAULT
	ORANGE ORANGE / WHITE	LOW FUEL
	BROWN * BROWN / WHITE *	FUEL LEAK
*CAT5 CABLE ONLY, FROM 2ND CAT5 CABLE		BLE ONLY, FROM 2ND CAT5 CABLE

SCALE: NTS

ALARM WIRING IDENTIFICATION CHART

ALARM WIRE IDENTIFICATION CHART

PREPARED FOR:



100% EMPLOYEE-OWNED 855 Community Dr, Sauk City, WI 53583 608-643-4100 www.Ramaker.com Sauk City, WI • Willmar, MN Woodcliff Lake, NJ • Bayamon, PR

CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

I hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensec Professional Engineer under the laws of the State of <u>Connecticut</u>.



DATE 2/24/2020

TORRINGTON CT WHEELER RD FA ID # 10128238

2 RICHARD RD TORRINGTON, CT 06790

SHEET TITLE:

PROPOSED 66 BLOCK FOR GENERATOR ALARM CIRCUITS (ON

EXISTING TELCO BOARD)

WIRING DETAILS

SCALE: NONE

PROJECT NUMBER 46519 SHEET NUMBER E-1

		EXISTING ASCO 300L ATS
	EXISTING 200A EXISTING SERVICE DISCONNECT	PROPOSED 30KW GENERATOR 120/240, \(\phi\), GOHz
	EXISTING 200A SERVICE FEED	PROPOSED GENERATOR RECEPTACLE #2 AWG SOLID TINNED GROUND (TYP)
-		20A 20A 20A


PROPOSED WIRING DIAGRAM

EXISTING 120/240, 1 ¢ - 200A DISTRIBUTION PANEL

AC Distribution Panel - Layout Diagram Breaker Breaker Breaker Breaker On/Off On/Off Position Type Size Circuit Label Position Type Size Circuit Label ON 20 SPARE 1P 2P ON 45 HVAC 1 1P ON 20 TELCO RECEPT 1P ON 20 INT LIGHTS 1P 20 RECEPT LEFT ON 1P 20 ON GFCI 2P ON 45 HVAC 2 1P 20 **EXT LIGHTS** ON 12 11 2P ON 30 2P RECTIFIER 1 OFF 30 RECTIFIER 2 13 14 16 15 2P ON 30 **RECTIFIER 3** 2P ON 30 RECTIFIER 4 17 18 20 19 2P **RECTIFIER 5** 2P ON 30 ON 30 RECTIFIER 6 21 22 23 24 2P ON 30 2P **RECTFIER 7** ON 30 RECTIFIER 8 25 26 27 28 1P 20 RECEPT RIGHT ON 2P ON 30 **RECTIFIER 9** 30 1P ON 20 SPARE 31 1P ON 20 SPARE 32 1P ON 20 SMOKE DETECTOR 33 1P ON 20 SPARE 34 1P 20 \ **BLOCK HEATER** ON 35 36 1P 20 **BATTERY CHARGER** ON 37 38 1P 20 ON ATS 39 40 41 42

> PROPOSED 20A BREAKERS FOR BLOCK HEATER, ATS AND BATTERY CHARGER ON NEW AT&T GENERATOR

EXISTING PANEL SCHEDULE



- IF EXISTING CONSTRUCTION VARIES FROM THIS DETAIL, AN EQUAL 3-HR U.L. PENETRATION APPROPRIATE FOR THE EXISTING WALL TYPE SHALL BE CONSTRUCTED
- GC SHALL USE NON-SHRINKING CAULK TO WEATHERSEAL ALL PENETRATIONS INTO OR THRU SHELTER WALL.

U.L. SYSTEM NO. C-AJ- I 150 CONDUIT THROUGH BEARING WALL SIMILAR TO U.L. DESIGN NO. U902 FRATING = 3 HRT RATING = O HR

- FLOOR OR WALL ASSEMBLY: MINIMUM 4-1/2" THICK REINFORCED LIGHTWEIGHT OR NORMAL WEIGHT (100-150 PCF) CONCRETE. WALL MAY ALSO BE CONSTRUCTED OF ANY UL CLASSIFIED CONCRETE BLOCKS*. MAX DIAMETER OF OPENING IS 4". SEE CONCRETE BLOCKS 9CATZ) CATEGORY IN THE FIRE RESISTANCE DIRECTORY FOR NAMES OF MANUFACTURERS.
- THROUGH PENETRATIONS: ONE METALLIC PIPE OR CONDUIT TO BE RIGIDLY SUPPORTED ON BOTH SIDES OF FLOOR OR WALL ASSEMBLY. THE ANNULAR SPACE SHALL BE MINIMUM O". (POINT CONTACT) TO MAXIMUM 1-3/8". THE FOLLOWING TYPES AND SIZES OF METALLIC PIPES OR CONDUITS MAY BE USED:
 - A. STEEL PIPE-NOMINAL 6" DIAMETER (OR SMALLER) SCHEDULE 40 (OR HEAVIER) STEEL PIPE.
- B. IRON PIPE-NOMINAL 6" DIAMETER (OR SMALLER) CAST OR DUCTILE IRON PIPE. C. CONDUIT - NOMINAL 4" DIAMETER (OR SMALLER) STEEL ELECTRICAL METALLIC TUBING OR NOMINAL 3-1/2" DIAMETER (OR SMALLER) STEEL CONDUIT
- PACKING MATERIAL: MINIMUM 6" THICKNESS OF MIN 4.0 PCF MINERAL WOOL BATTING INSULATION FIRMLY PACKED INTO OPENING AS A PERMANENT FORM. PACKING MATERIAL TO BE RECESSED FROM TOP SURFACE OF FLOOR OR FROM BOTH SURFACES OF WALL AS REQUIRED TO ACCOMMODATE THE REQUIRED THICKNESS OF FILL MATERIAL.
- FILL, VOID, OR CAVITY MATERIAL*: SEALANT: MINIMUM 1/4" THICKNESS OF FILL MATERIAL APPLIED WITHIN THE ANNULUS, FLUSH WITH TOP SURFACE OF FLOOR AND WITH BOTH SURFACES OF WALL. AT THE POINT CONTACT LOCATION BETWEEN PIPE AND CONCRETE, A MINIMUM 1/2" DIAMETER BEAD OF FILL MATERIAL SHALL BE APPLIED AT THE CONCRETE/PIPE INTERFACE ON THE TOP SURFACE OF FLOOR AND ON BOTH SURFACES OF WALL. W RATING APPLIES ONLY WHEN CPGO IS OR CPGO4 SEALANT IS

HILTI CONSTRUCTION CHEMICALS, DIV OF HILTI INC. : CP6015, CP604, CP606, OR FS-ONE

* BEARING THE UL CLASSIFICATION MARK

OUTER WALL PENETRATION DETAIL (IF APPLICABLE)





TOP OF GROUND



THROUGH CABLE TO SIDE OF GROUND ROD. GROUND ROD



Type VV THROUGH VERTICAL CABLE TO VERTICAL STEEL SURFACE OR TO THE

SIDE OF EITHER HORIZONTAL OR



HORIZONTAL CABLE HORIZONTAL STEEL CABLE OFF SURFACE



Type TA TFF OF ORIZONTAL RUN AND TAP CABLES

ۯ¶

HORIZONTAL CABLE TAP TO VERTICAL STEEL SURFACE OR THE SIDE OF HORIZONTAL PIPE



Type VS CABLE TAP DOWN AT 45°TO VERTICAL STEEL SURFACE OR SIDE OF HORIZONTAL OR VERTICAL PIPE.



GROUND ROD

CONTRACTOR TO LABEL WIRES WITH P-TOUCH OR SIMILAR LABELS ONLY. ABSOLUTELY NO HANDWRITTEN LABELS.

*CONTRACTOR TO UTILIZE NEXT AVAILABLE IN SEQUENCE SINGLE BREAKER POSITION FOR GENERATOR BATTERY CHARGER BATTERY HEATER AND BLOCK HEATER

> CADWELD DETAILS SCALE: NTS

TORRINGTON, CT 06790 SHEET TITLE: PANEL AND PENETRATION

DETAILS

TORRINGTON CT

WHEELER RD

FA ID # 10128238

DATE 2/24/2020

100% EMPLOYEE-OWNED

855 Community Dr, Sauk City, WI 53583

608-643-4100 www.Ramaker.com

Sauk City, WI • Willmar, MN

Woodcliff Lake, NJ · Bayamon, PR

GENERAL DYNAMICS

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensec Professional Engineer under the laws of the State of <u>Connecticut</u>.

CONNE OF CONNEC,

MALTIN

Information Technology, Inc.

PREPARED FOR:

CONSULTANT:

GENERAL DYNAMICS

661 MOORE RD STE 110

KING OF PRUSSIA, PA 19406

SCALE: NONE

3/12/20 REVISED CDs

FINAL

2 RICHARD RD

46519 SHEET E-2

(2) BUTTERFLY CLAMP AS REQUIRED


CONDUIT (TYP)

(3) EXISTING WALL/CEILING

> VERTICAL "UNISTRUT" PI 000 'T' SERIES LENGTH BASED ON NUMBER OF CONDUIT TO BE MOUNTED

USE
3/8" DIA. TOGGLE BOLT
3/8" DIA. LAG SCREW
3/8" DIA. HILTI HY-20 WITH SCREEN, MINIMUM EMBEDMENT 2-1/2"
3/8" DIA. HILTI HY-150 WITH SCREEN, MINIMUM EMBEDMENT 2-1/2"

NOTE: USE GALVANIZED OR STAINLESS STEEL HARDWARE FOR WALL MOUNT & CONNECTIONS OF CHANNELS SPACE UNITS @ 5'-O" O.C. LENGTH OF RUN

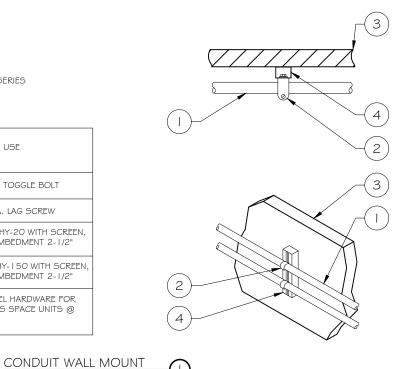



- GROUND RODS MAY BE: - COPPER CLAD STEEL
- SOLID COPPER 2. GROUND RODS SHALL HAVE A MAXIMUM SPACING TWICE THE LENGTH OF ROD
- 3. SEE RESISTIVITY REPORT FOR VERIFICATION AS AVAILABLE
- 4. A LARGER CONDUCTOR SHALL BE REQUIRED IN AREAS HIGHLY PRONE TO LIGHTNING AND/OR AREAS WITH HIGHLY ACIDIC SOIL
- GROUND RODS INSTALLED WITHIN CLOSE PROXIMITY TO TOWER OR WHEN SOIL IS AT OR BELOW 2,000 OHM-CM, SHALL BE GALVANIZED TO PREVENT GALVANIC CORROSION OF TOWER, (SEE ANSI/TIA-EIA-222-G)
- PROVIDE (I) GROUND LEAD TO EACH SIDE OF THE GENERATOR


	CADWELD
_	GRADE
_	
48" (MIN.)	#2 AWG BCW GROUND RING
48	GROUND ROD COPPERWELD 5/8"Ø x 8"-0" LONG (MAX)

GROUND ROD DETAIL



WALL CONSTRUCTION TYPE	USE
HOLLOW	3/8" DIA. TOGGLE BOLT
HOLLOW, AT STUD	3/8" DIA. LAG SCREW
CONCRETE BLOCK (HOLLOW)	7/16" DIA. HILTI HY-20 WITH SCREEN MINIMUM EMBEDMENT 2-1/2"
CONCRETE (SOLID)	7/16" DIA. HILTI HY-150 WITH SCREEN MINIMUM EMBEDMENT 2-1/2"

- . USE GALVANIZED OR STAINLESS STEEL HARDWARE FOR WALL MOUNT AND CONNECTION OF CHANNELS
- 2. GC SHALL USE NON-SHRINKING CAULK TO WEATHER SEAL ALL PENETRATIONS INTO OR THROUGH SHELTER WALL

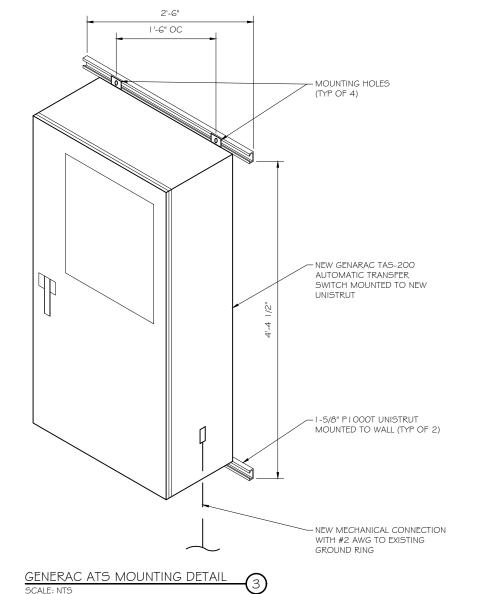



855 Community Dr, Sauk City, WI 53583 608-643-4100 www.Ramaker.com

Sauk City, WI • Willmar, MN Woodcliff Lake, NJ · Bayamon, PR

PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of <u>Connecticut</u>.



SSUE FINAL

DATE 2/24/2020 TORRINGTON CT

WHEELER RD FA ID # 10128238

2 RICHARD RD TORRINGTON, CT 06790

ATS, CONDUIT & GROUND ROD DETAILS

SCALE: NONE

46519 SHEET E-3

SD030 | 2.2L | 30 kW

INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency

Standby Power Rating 30 kW, 38 kVA, 60 Hz

Prime Power Rating* 27 kW, 34 kVA, 60 Hz

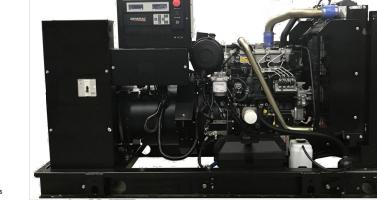


Image used for illustration purposes only

GENERAC* INDUSTRIAL

Codes and Standards

Not all codes and standards apply to all configurations. Contact factory for details.



UL2200, UL508, UL489, UL142



CSA C22.2



BS5514 and DIN 6271



SAE J1349



NFPA 37, 70, 99, 110



NEC700, 701, 702, 708



ISO 3046, 7637, 8528, 9001



ANSI

NEMA ICS10, MG1, 250, ICS6, AB1

ANSI C62.41

Powering Ahead

For over 50 years, Generac has provided innovative design and superior manufacturing.

Generac ensures superior quality by designing and manufacturing most of its generator components, including alternators, enclosures and base tanks, control systems and communications software.

Generac gensets utilize a wide variety of options, configurations and arrangements, allowing us to meet the standby power needs of practically every application.

Generac searched globally to ensure the most reliable engines power our generators. We choose only engines that have already been proven in heavy-duty industrial applications under adverse conditions.

Generac is committed to ensuring our customers' service support continues after their generator purchase.

SD030 | 2.2L | 30 kW INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency

STANDARD FEATURES

ENGINE SYSTEM

- Oil Drain Extension Air Cleaner
- Fan Guard
- · Stainless Steel Flexible Exhaust Connectio
- · Factory Filled Oil and Coolant
- · Radiator Duct Adapter (Open Set Only)
- Critical Silencer (Enclosed Unit Only) · Engine Coolant Heater

Fuel System

- Fuel Lockoff Solenoid
- Primary Fuel Filter

Cooling System

- Closed Coolant Recovery System
- UV/Ozone Resistant Hoses · Factory-Installed Radiator
- Radiator Drain Extension
- 50/50 Ethylene Glycol Antifreeze

Electrical System

· Battery Charging Alternator

CONTROL SYSTEM

- Battery Cables Battery Tray
- Rubber-Booted Engine Electrical Connections
- · Solenoid Activated Starter Motor

ALTERNATOR SYSTEM

- UL2200 GENprotect[™]
- Class H Insulation Material
- 2/3 Pitch
- Skewed Stator
- Brushless Excitation
- Sealed Bearing · Rotor Dynamically Spin Balanced
- Amortisseur Winding (3-Phase Only)
- Full Load Capacity Alternator

· Protective Thermal Switch **GENERATOR SET**

- Internal Genset Vibration Isolation
- Separation of Circuits High/Low Voltage
- Separation of Circuits Multiple Breakers
- Wrapped Exhaust Piping
- · Standard Factory Testing
- 2 Year Limited Warranty (Standby Rated Units)
- 1 Year Limited Warranty (Prime Rated Units)
- Silencer Mounted in the Discharge Hood (Enclosed Unit Only)

· Audible Alarms and Shutdowns

Not in Auto (Flashing Light)

E-Stop (Red Mushroom-Type)

· Predictive Maintenance Algorithm

Auto/Off/Manual Switch

ENCLOSURE (If Selected)

- Rust-Proof Fasteners with Nylon Washers to
- High Performance Sound-Absorbing Material
- Upward Facing Discharge Hoods
- Stainless Steel Lift Off Door Hinges
- Stainless Steel Lockable Handles

FUEL TANKS (If Selected)

- Double Wall
- · Normal and Emergency Vents
- Sloped Bottom
- Rupture Basin Alarm
- Fuel Level
- RhinoCoat™ Textured Polvester Powder Coat Paint
- - Battery Voltage
- Customizable Alarms, Warnings, and Events Modbus[®] Protocol
- Sealed Boards
- Password Parameter Adjustment Protection

NFPA110 Level I and II (Programmable)

- Single Point Ground
- 16 Channel Remote Trending
- 0.2 msec High Speed Remote Trending
- · Alarm Information Automatically Annunciated on the Display

Full System Status Display

- Power Output (kW)
- Power Factor
- Real/Reactive/Apparent Power
- All Phase Currents

- Oil Pressure
- Coolant Level
- Frequency

Alarms and Warnings

- Coolant Level
- Engine Overspeed
- Battery Voltage
- Alarms and Warnings Spelled Out (No Alarm Codes)

GENERAC INDUSTRIAL

- (Sound Attenuation Enclosures)
- Gasketed Doors
- · Stamped Air-Intake Louvers
- (Radiator and Exhaust
- RhinoCoat™ Textured Polyester Powder Coat Paint

- UL 142/ULC S601
- Sloped Top
- Factory Pressure Tested
- Check Valve In Supply and Return Lines
- Stainless Steel Hardware

- Coolant Temperature
- Engine Speed

- Oil Pressure
- Coolant Temperature
- Alarms and Warnings Time and Date Stamped
- Snap Shots of Key Operation Parameters During Alarms and Warnings

TORRINGTON CT WHEELER RD FAID#10128238

DATE 2/24/2020

855 Community Dr, Sauk City, WI 53583 608-643-4100 www.Ramaker.com

Sauk City, WI • Willmar, MN Woodcliff Lake, NJ · Bayamon, PR

GENERAL DYNAMICS

hereby certify that this plan, specification, or report was prepar by me or under my direct supervision and that I am a duly License Professional Engineer under the laws of the State of Connecticut

Information Technology, Inc.

PREPARED FOR:

CONSULTANT:

GENERAL DYNAMICS

661 MOORE RD STE 110

KING OF PRUSSIA, PA 19406

TORRINGTON, CT 06790

RICHARD RD

GENERAC 30KW GENERATOR **SPECIFICATIONS**

SCALE: NONE

3/1 2/20 REVISED CDs

DATE DESCRIPTION

46519 SHEET E-4

GENERAC 30KW GENERATOR SPECIFICATIONS SCALE: NTS



Digital H Control Panel- Dual 4x20 Display **Program Functions** · Programmable Crank Limiter

- 7-Day Programmable Exerciser Special Applications Programmable Logic Controller
- RS-232/485 Communications
- · All Phase Sensing Digital Voltage Regulator · 2-Wire Start Capability
- Date/Time Fault History (Event Log) Isochronous Governor Control Waterproof/Sealed Connectors

- · kW Hours, Total, and Last Run
- All Phase AC Voltage

SD030 | 2.2L | 30 kW INDUSTRIAL DIESEL GENERATOR SET GENERAC* | INDUSTRIAL

EPA Certified Stationary Emergency

CONFIGURABLE OPTIONS

ENGINE SYSTEM

- Oil Heater
- O Critical Silencer (Open Set Only)
- O Radiator Stone Guard
- O Level 1 Fan and Belt Guards (Open Set Only)

FUEL SYSTEM

O NPT Flexible Fuel Line

ELECTRICAL SYSTEM

- O 10A UL Listed Battery Charger
- O Battery Warmer

ALTERNATOR SYSTEM

- Alternator Upsizing
- Anti-Condensation Heater
- Tropical Coating
- O Permanent Magnet Excitation

GENERATOR SET

- Extended Factory Testing
- O 8 Position Load Center O Pad Vibration Isolation

ENGINEERED OPTIONS

ENGINE SYSTEM

- Coolant Heater Isolation Ball Valves
- O Fluid Containment Pan

CONTROL SYSTEM

- O Spare Inputs (x4) / Outputs (x4)
- O Battery Disconnect Switch

CIRCUIT BREAKER OPTIONS

- O Main Line Circuit Breaker
- O 2nd Main Line Circuit Breaker
- O Shunt Trip and Auxiliary Contact Electronic Trip Breakers

ENCLOSURE

- Weather Protected Enclosure
- Level 1 Sound Attenuation
- Level 2 Sound Attenuation
- Level 2 Sound Attenuation with Motorized Dampers
- Steel Enclosure
- Aluminum Enclosure
- O Up to 200 MPH Wind Load Rating (Contact Factory for Availability)
- AC/DC Enclosure Lighting Kit
- O Door Alarm Switch
- Enclosure Heater
- O Damper Alarm Contacts

WARRANTY (Standby Gensets Only)

- 2 Year Extended Limited Warranty
- O 5 Year Limited Warranty
- O 5 Year Extended Limited Warranty O 7 Year Extended Limited Warranty
- O 10 Year Extended Limited Warranty

CONTROL SYSTEM

- O NFPA 110 Compliant 21-Light Remote Annunciator
- O Remote Relay Assembly (8 or 16)
- Oil Temperature Indication and Alarm
- O Remote E-Stop (Break Glass-Type, Surface Mount)
- O Remote E-Stop (Red Mushroom-Type, Surface Mount)
- Remote E-Stop (Red Mushroom-Type, Flush Mount)
- O 100 dB Alarm Horn
- O Ground Fault Annunciation
- O 120V GFCI and 240V Outlets
- O Remote Communication Modem
- O 10A Engine Run Relay

FUEL TANKS (Size On Last Page)

- O 8 in (203.2 mm) Fill Extension
- O 13 in (330.2 mm) Fill Extension
- O 19 in (482.6 mm) Fill Extension
- Overfill Protection Valve
- O 5 Gallon Spill Box Return Hose
- O 5 Gallon Spill Box
- Tank Risers
- O Fuel Level Switch and Alarm
- 12' Vent System O Fire Rated Stainless Steel Fuel Hose

ALTERNATOR SYSTEM

- O 3rd Breaker System
- **GENERATOR SET**
- Special Testing

FUEL TANKS

- O UL2085 Tank
- Stainless Steel Tanks
- O Special Fuel Tanks Vent Extensions

SD030 | 2.2L | 30 kW

INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency

APPLICATION AND ENGINEERING DATA

ENGINE SPECIFICATIONS

$\overline{}$	_	_	_	_	ı

/lake	Perkins
PA Emissions Compliance	Stationary Emergency
PA Emissions Reference	See Emission Data Sheet
Cylinder #	4
уре	In-Line
Displacement - in ³ (L)	135 (2.22)
Bore - in (mm)	3.3 (84)
Stroke - in (mm)	3.9 (100)
Compression Ratio	23.3:1
ntake Air Method	Turbocharged
Cylinder Head	Cast Iron
Piston Type	Aluminum
Crankshaft Type	Forged Steel

Engine Governing

Governor	Electronic Isochronous
Frequency Regulation (Steady State)	±0.5%

Lubrication System

Eddiloddon Gyddoni	
Oil Pump Type	Gear
Dil Filter Type	Full-Flow
Crankcase Capacity - qt (L)	11.2 (10.6)

Cooling System

Cooling System Type	Closed Recovery
Water Pump Type	Pre-Lubed, Self Sealing
Fan Type	Pusher
Fan Speed - RPM	1,980
Fan Diameter - in (mm)	18 (457)

Fuel System

Fuel Type	Ultra Low Sulfur Diesel Fuel #2
Fuel Specifications	ASTM
Fuel Filtering (Microns)	5
Fuel Inject Pump	Distribution Injection Pump
Fuel Pump Type	Engine Driven Gear
Injector Type	Mechanical
Fuel Supply Line - in (mm)	0.31 (7.9) ID
Fuel Return Line - in (mm)	0.2 (4.8) ID

Engine Electrical System

System Voltage	12 VDC
Battery Charger Alternator	Standard
Battery Size	See Battery Index 0161970SBY
Battery Voltage	12 VDC
Ground Polarity	Negative

ALTERNATOR SPECIFICATIONS

Standard Model	K0035124Y21	
Poles	4	
Field Type	Revolving	
Insulation Class - Rotor	Н	
Insulation Class - Stator	Н	
Total Harmonic Distortion	<5% (3-Phase)	
Telephone Interference Factor (TIF)	< 50	

Standard Excitation	Brushless		
Bearings	Single Sealed		
Coupling	Direct via Flexible Disc		
Load Capacity - Standby	100%		
Prototype Short Circuit Test	Yes		
Voltage Regulator Type	Digital		
Number of Sensed Phases	All		
Regulation Accuracy (Steady State)	±0.25%		

GENERAC INDUSTRIAL

ecovery	
d, Self Sealing	
_	

CONSULTANT: GENERAL DYNAMICS

Туре	Ultra Low Sulfur Diesel Fuel #2
Specifications	ASTM
Filtering (Microns)	5
Inject Pump	Distribution Injection Pump
Pump Type	Engine Driven Gear
ctor Type	Mechanical
Supply Line - in (mm)	0.31 (7.0) ID

System Voltage	12 VDC
Battery Charger Alternator	Standard
Battery Size	See Battery Index 0161970SBY
Battery Voltage	12 VDC
Ground Polarity	Negative

O LOI I GOLD GOLD GOLD GOLD GOLD GOLD GOLD GOLD	5100111000	
Bearings	Single Sealed	
Coupling	Direct via Flexible Disc	
Load Capacity - Standby	100%	
Prototype Short Circuit Test	Yes	
Voltage Regulator Type	Digital	
	A.11	

TORRINGTON CT WHEELER RD FA ID # 10128238

DATE 2/24/2020

100% EMPLOYEE-OWNED 855 Community Dr, Sauk City, WI 53583 608-643-4100 www.Ramaker.com

Sauk City, WI • Willmar, MN Woodcliff Lake, NJ · Bayamon, PR

Information Technology, Inc.

GENERAL DYNAMICS

661 MOORE RD STE 110

KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensec Professional Engineer under the laws of the State of <u>Connecticut</u>.

PREPARED FOR:

2 RICHARD RD TORRINGTON, CT 06790

FINAL

GENERAC 30KW GENERATOR **SPECIFICATIONS**

SCALE: NONE

46519 E-4. SHEET

GENERAC 30KW GENERATOR SPECIFICATIONS SCALE: NTS

SD030 | 2.2L | 30 kW

EPA Certified Stationary Emergency

MOTOR STARTING CAPABILITIES (skVA)

FUEL CONSUMPTION RATES*

COMBUSTION AIR REQUIREMENTS

OPERATING DATA

POWER RATINGS

INDUSTRIAL DIESEL GENERATOR SET

COOLING

ENGINE

Deration - Operational characteristics consider maximum ambient conditions. Derate factors may apply under atypical site conditions. Please contact a Generac Power Systems Industrial Dealer for additional details. All performance ratings in accordance with ISO3046, BS5514, ISO8528, and DIN6271 standards. Prime - See Bulletin 0187510SSB

EXHAUST


GENERAC INDUSTRIAL

SD030 | 2.2L | 30 kW

INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency


DIMENSIONS AND WEIGHTS*






OPEN SET (INCludes Exhaust Flex)					
Run Time - Hours	Usable Capacity - Gal (L)	LxWxH-in (mm)	Weight - lbs (kg)		
No Tank	-	76.0 (1,930) x 37.4 (950) x 44.8 (1,138)	1,641 (745)		
19	54 (204)	76.0 (1,930) x 37.4 (950) x 57.8 (1,468)	2,121 (963)		
47	132 (501)	76.0 (1,930) x 37.4 (950) x 69.8 (1,773)	2,351 (1,067)		
75	211 (799)	76.0 (1,930) x 37.4 (950) x 81.8 (2,078)	2,560 (1,162)		
107	300 (1.136)	92.9 (2.360) x 37.4 (950) x 81.8 (2.078)	2.623 (1.190)		

GENERAC | INDUSTRIAL







WEATHER PROTECTED ENCLOSURE						
Run Time	Usable Capacity	L x W x H - in (mm)		- lbs (kg) sure Only		
- Hours	- Gal (L)		Steel	Aluminun		
No Tank	-	94.8 (2,409) x 38.0 (965) x 49.5 (1,258)				
19	54 (204)	94.8 (2,409) x 38.0 (965) x 62.5 (1,588)	070	0.44		
47	132 (501)	94.8 (2,409) x 38.0 (965) x 74.5 (1,893)	372 (170)	241 (110)		
75	211 (799)	94.8 (2,409) x 38.0 (965) x 86.5 (2,198)	(170)	(110)		
107	300 (1,136)	94.8 (2,409) x 38.0 (965) x 86.5 (2,198)				



LEVEL I ACOUSTIC ENCLUSURE					
Run Time	Capacity L x W x H - In (mm)		Enclos	- Ibs (kg sure Only	
110010	- Gal (L)		Steel	Aluminu	
No Tank	-	112.5 (2,857) x 38.0 (965) x 49.5 (1,258)			
19	54 (204)	112.5 (2,857) x 38.0 (965) x 62.5 (1,582)		000	
47	132 (501)	112.5 (2,857) x 38.0 (965) x 74.5 (1,893)	505 (230)	338 (154)	
75	211 (799)	112.5 (2,857) x 38.0 (965) x 86.5 (2,198)	(200)	(134)	
107	300 (1,136)	112.5 (2,857) x 38.0 (965) x 86.5 (2,198)			

LEVEL 1 ACCHIETIC ENCLOSURE





Run Time - Hours	Usable Capacity	L x W x H - in (mm)		- Ibs (kg) ure Only
- 110013	- Gal (L)		Steel	Aluminum
No Tank	-	94.8 (2,407) x 38.0 (965) x 61.1 (1,551)	510 (232)	
19	54 (204)	94.8 (2,407) x 38.0 (965) x 74.1 (1,881)		0.44
47	132 (501)	94.8 (2,407) x 38.0 (965) x 86.1 (2,186)		341 (155)
75	211 (799)	94.8 (2,407) x 38.0 (965) x 98.1 (2,491)		
107	300 (1,136)	94.8 (2,407) x 38.0 (965) x 98.1 (2,491)		

* All measurements are approximate and for estimation purposes only. Specification characteristics may change without notice. Please contact a Generac Power Systems Industrial Dealer for detailed installation drawings

Generac Power Systems, Inc. | P.O. Box 8 | Waukesha, WI 53189 P: (262) 544-4811 ©2018 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice. Part No. 10000024842 Rev. B 08/27/18

855 Community Dr, Sauk City, WI 53583

608-643-4100 www.Ramaker.com Sauk City, WI • Willmar, MN Woodcliff Lake, NJ · Bayamon, PR

PREPARED FOR:




CONSULTANT:


GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensec Professional Engineer under the laws of the State of <u>Connecticut</u>.





DATE 2/24/2020

TORRINGTON CT WHEELER RD FAID#10128238

2 RICHARD RD TORRINGTON, CT 06790

GENERAC 30KW GENERATOR **SPECIFICATIONS**

SCALE: NONE

46519 E-4.2 SHEET

GENERAC 30KW GENERATOR SPECIFICATIONS SCALE: NTS

Standby

296.6 (8.4)

1.5 (5.1)

892 (478)



Standby 1.800 Exhaust Flow (Rated Output) RPM 49 1,181 (360) Exhaust Temp (Rated Output) 159 (1,096) psi (kPa) ** Refer to "Emissions Data Sheet" for maximum bHP for EPA and SCAQMD permitting purposes

Flow at Rated Power scfm (m3/min)

Single-Phase 120/240 VAC @1.0pf

Three-Phase 120/208 VAC @0.8pf

Three-Phase 120/240 VAC @0.8pf

Three-Phase 277/480 VAC @0.8pf

Three-Phase 346/600 VAC @0.8pf

Fuel Pump Lift- ft (m)

3 (1)

Total Fuel Pump Flow (Combustion + Return) - gph (Lph)

16.6 (63)

inHg (kPa)

See Bulletin No. 0199280SSD

Max. Allowable Backpressure (Post Turbocharger)

Standby

88 (2.5)

Standby

Amps: 125

Amps: 104

Amps: 90

Amps: 45

Amps: 36

Percent Load

25%

50%

75%

100%

Diesel - gph (Lph)

* Fuel supply installation must accommodate fuel consumption rates at 100% load.

Standby

14.9 (56.2)

2.5 (9.5)

128,638 (136) 2,800 (4,757)

122 (50)

scfm (m3/min)

Standby

1.0 (3.7)

1.4 (5.2)

2.0 (7.5)

2.8 (10.5)

30 kW

30 kW

30 kW

30 kW

skVA vs. Voltage Dip

277/480 VAC 30% 208/240 VAC 30% K0035124Y21 61 K0035124Y21 46

K0050124Y21 98 K0050124Y21 75

K0040124Y21 76 K0040124Y21

gal (L)

BTU/hr (kW)

°F (°C)

in H₂O (kPa)

Rated Engine Speed Horsepower at Rated kW**

Maximum Operating Ambient Temperature

Maximum Radiator Backpressure

Maximum Operating Ambient Temperature (Before Derate)

Coolant Flow

Coolant System Capacity

Heat Rejection to Coolant

TTS Series **Switches 200 Amps**

600 VAC



TAS200 TAS200

TAS200

200A Automatic Transfer Switch

1 of 3 2 of 3

The Generac TAS200 Automatic Transfer Switch

Flexibility for multiple application installations

Multiple generator support with 3 source panel

Designed with a 6 inch touch screen controller for improved user interface

Camlock functionality for mobile generator sources



Image used for illustration purposes only.

Features

- STEEL CONSTRUCTION
- NEMA 3R ENCLOSURE WITH HINGED "PADLOCKING" DOORS
- STAINLESS STEEL HARDWARE
- CAMLOCK "QUICK CONNECT" CAPABILITY
- OPERATIONAL STATUS VIEW VIA **6 INCH TOUCH SCREEN**
- TEST FUNCTION FAST TEST & NORMAL TEST
- UL1008 LISTED FOR EMERGENCY SYSTEMS

Optional Features

- EXTENDED WARRANTY
- THREE-PHASE VOLTAGE CONFIGURATIONS

Codes and Standards

Generac products are designed to the following standards:



UL1008, UL508, UL50, CSA C22.2 No. 178



NEC 700, 701 and 702



NEMA 250

Application and Engineering Data

Cabinet Specifications	
Dimensions	24"W x 12"D x 48"H
Weight	210 lbs.
	Single Chamber with Main Door
	Steel
	UL Type / NEMA 3R Rated
Construction	Powder Coat Finish for Corrosion Resistance
	C-UL-US Listed - Automatic Transfer Switch
	Stainless Steel Hardware
	3-Point Latching System with Pad-Lockable Handles
Mounting Options	Wall
	H-frame
Installed	Pre-wired alarm terminal strip

Electrical Specifications	
Voltage/Phase/Amps	120/240 Single-Phase, 200A 120/208 3-Phase, 200A 120/240 3-Phase, 200A
Breaker	Eaton 200 amp Utility Breaker
	Eaton 200 amp Generator Breaker
Maximum RMS Symmetrical Fault Current - Amps	25k AIC Rated
Protective Device Continuous Rating (Max) Amp	200
Input to Generator	350MCM - #6 AWG
Output to Site	350MCM - #6 AWG
Generator Annunciator Connector	Deutsch DTM04-12PA-L012
Alarm Terminal Board	Generator Run Alarm
	Generator Fail — Shutdown Alarm
	Generator Fail – Non Shutdown Alarm
	Low Fuel Alarm
	Generator Theft Alarm
	AC Utility Fail Alarm

Camlock Component		
Camlock Component	Shipped loose for multiple installation options	
Dimensions	9" W x 9.4" D x 24.25" H	GENERAC
200A Camlock Generator Connection	Single-Phase: Black L1, Red L2, White-Neutral, Green-Ground	•
	3-Phase: Black L1, Red L2, Blue L3, White-Neutral, Green-Ground	
	Uses 4 CH E1016 Male Connectors	
	Mating Connector – CH E1016 Female	

855 Community Dr, Sauk City, WI 53583 608-643-4100 www.Ramaker.com Sauk City, WI • Willmar, MN Woodcliff Lake, NJ • Bayamon, PR PREPARED FOR:

CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was in by me or under my direct supervision and that I am a duly L Professional Engineer under the laws of the State of Conne





TORRINGTON CT

DATE 2/24/2020

WHEELER RD FA ID # 10128238

2 RICHARD RD TORRINGTON, CT 06790

GENERAC ATS SPECIFICATIONS


SCALE: NONE

46519 E-5 SHEET

TAS200

Touch Screen Interface





INDICATORS AND BUTTONS

- · System Ready indicator
- Standby Operating indicator
- Utility Available indicator
- GEN/UTIL Switch Position indicator
- TVSS status

- · Normal Test button
- Fast Test button
- Return to Normal button
- Reset button
- · Exercising indicator

DETAILS SCREEN

System Settings:

- · System Voltage/Phases:
- 120/240V single phase (standard)
- 120/208V three phase (optional) - 120/240V three phase (optional)
- Utility Fail Monitor:
- Under Voltage: 75-95% of nominal voltage
- Over Voltage: 105%-125% of nominal voltage
- Pickup (hysteresis): fixed at 5 volts
- Delay time: 0-60s
- Utility Interrupt Delay: 0-60s
- Return to Utility Timer: 1-30 minutes
- Transfer:
- In-phase, or
- Time-Delay-Neutral at 0.0-10.0s in 1 second increments

Engine Settings:

- Engine Warm-up timer: 0-20 minutes
- · Generator Load Accept:
- Time-Delay-Neutral at 0.0-10.0s in 1 second increments
- Voltage: 85-95% of nominal
- Frequency: 85-95% of nominal
- Engine Minimum Run Timer: 5-30 minutes
- Engine Cooldown Timer: 0-20 minutes

Exercise Settings:

- · Time of day
- · Day of week
- Exercise:
- Exercise with/without load
- Exercise once every 1, 2, or 4 weeks.
- Exercise time-of-day
- Exercise day of week
- Exercise duration: 15-30 minutes

Screen Settings:

- Brightness & Contrast button
- Screen Calibration button
- Startup/Clean screen

Diagnostics:

- Digital I/O bits status
- Voltage A/D readings

Mimic Diagram:

- System Ready
- Transfer switch position
- Utility available
- Standby available
- Maintenance/Auto switch position
- Generator source TS position
- TVSS status

Generac Power Systems, Inc. • S45 W29290 HWY. 59, Waukesha, WI 53189 • generac.com ©2013 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice. Bulletin 0195670SBY-B / Printed in U.S.A. 03/13/13 100% EMPLOYEE-OWNED

855 Community Dr, Sauk City, WI 53583 608-643-4100 www.Ramaker.com

Sauk City, WI • Willmar, MN Woodcliff Lake, NJ • Bayamon, PR

PREPARED FOR:



CONSULTANT:

GENERAL DYNAMICS

Information Technology, Inc.

GENERAL DYNAMICS 661 MOORE RD STE 110 KING OF PRUSSIA, PA 19406

hereby certify that this plan, specification, or report was prepare by me or under my direct supervision and that I am a duly Licensec Professional Engineer under the laws of the State of <u>Connecticut</u>.



I 3/12/20 REVISED CDs

TORRINGTON CT WHEELER RD FA ID # 10128238


DATE 2/24/2020

2 RICHARD RD TORRINGTON, CT 06790

GENERAC ATS SPECIFICATIONS

SCALE: NONE

46519 PROJECT NUMBER E-5. SHEET

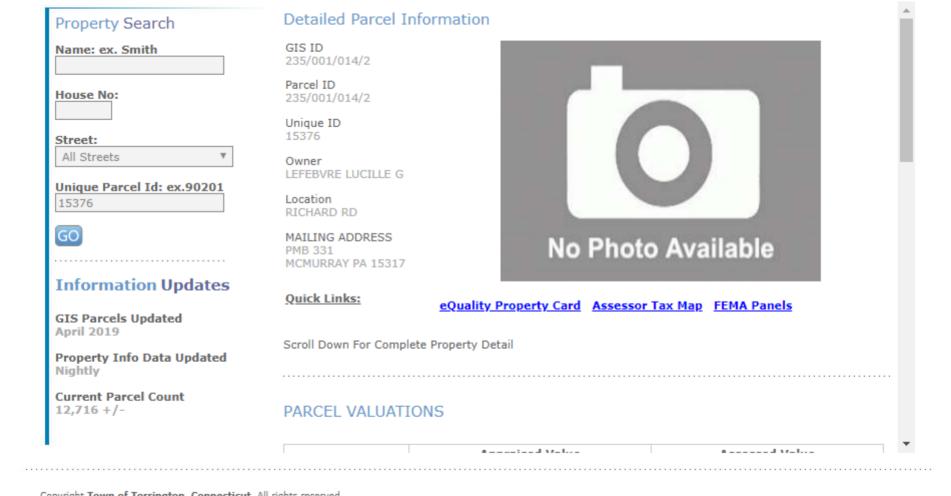

ATTACHMENT 2



Address Information

Ship to:

Ship from:

Mayor Elinor Carbone

Lucia Chiocchio, Esq.

Cuddy & Feder LLP

445 Hamilton Avenue

Suite 1400

TORRINGTON, CT

White Plains, NY

06790

10601 US

US 914-761-1300

140 Main Street

9147611300

Shipment Information:

Tracking no.: 770055271581

Ship date: 03/18/2020

Estimated shipping charges: 10.14 USD

Package Information

Pricing option: FedEx Standard Rate Service type: FedEx Express Saver Package type: FedEx Envelope

Number of packages: 1 Total weight: 1 LBS

Declared Value: 0.00 USD

Special Services:

Pickup/Drop-off: Use an already scheduled pickup at my location

Billing Information:

Bill transportation to: CuddyFeder-963

Your reference: 1844-3533

P.O. no.: Invoice no.: Department no.:

Thank you for shipping online with FedEx ShipManager at fedex.com.

Please Note

FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income Interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for Items of extraordinary value is \$1000, e.g., jewelry, precious metals, negotiable instruments and other items listed in our Service Guide. Written claims must be filed within strict time limits; Consult the applicable FedEx Service Guide for details.

The estimated shipping charge may be different than the actual charges for your shipment. Differences may occur based on actual weight, dimensions, and other factors. Consult the applicable FedEx Service Guide or the FedEx Rate Sheets for details on how shipping charges are calculated.



Address Information

Ship to:

Martin J. Connor, AICP Torrington City Hall

140 Main Street

Room 324

TORRINGTON, CT

06790 US

914-761-1300

Ship from:

Lucia Chiocchio, Esq. Cuddy & Feder LLP 445 Hamilton Avenue

Suite 1400

White Plains, NY

10601 US

9147611300

Shipment Information:

Tracking no.: 770055454518

Ship date: 03/18/2020

Estimated shipping charges: 10.14 USD

Package Information

Pricing option: FedEx Standard Rate Service type: FedEx Express Saver Package type: FedEx Envelope

Number of packages: 1 Total weight: 1 LBS

Declared Value: 0.00 USD

Special Services:

Pickup/Drop-off: Use an already scheduled pickup at my location

Billing Information:

Bill transportation to: CuddyFeder-963

Your reference: 1844-3533

P.O. no.: Invoice no.: Department no.:

Thank you for shipping online with FedEx ShipManager at fedex.com.

Please Note

FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1000, e.g., lewelry, precious metals, negotiable instruments and other items listed in our Service Guide. Written claims must be filed within strict time limits; Consult the applicable FedEx Service Guide for details.

Guide for details.
The estimated shipping charge may be different than the actual charges for your shipment. Differences may occur based on actual weight, dimensions, and other factors. Consult the applicable FedEx Service Guide or the FedEx Rate Sheets for details on how shipping charges are calculated.



Address Information

Ship to:

Ship from:

Crown Castle

Lucia Chiocchio, Esq.

Cuddy & Feder LLP

2000 Corporate Drive, 11th

445 Hamilton Avenue

Floor

Suite 1400

CANONSBURG, PA

White Plains, NY

15317

10601

US

US

914-761-1300

9147611300

Shipment Information:

Tracking no.: 770055313490

Ship date: 03/18/2020

Estimated shipping charges: 10.29 USD

Package Information

Pricing option: FedEx Standard Rate Service type: FedEx Express Saver Package type: FedEx Envelope

Number of packages: 1 Total weight: 1 LBS Declared Value: 0.00 USD

Special Services:

Pickup/Drop-off: Use an already scheduled pickup at my location

Billing Information:

Bill transportation to: CuddyFeder-963

Your reference: 1844-3533

P.O. no.: Invoice no.: Department no.:

Thank you for shipping online with FedEx ShipManager at fedex.com.

Please Note

FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, profit, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for items of extraordinary value is \$1000, e.g., jewelry, precious metals, negotiable instruments and other items listed in our Service Guide. Written claims must be filed within strict time limits; Consult the applicable FedEx Service Guide for details.

The estimated shipping charge may be different than the actual charges for your shipment. Differences may occur based on actual weight, dimensions, and other factors. Consult the applicable FedEx Service Guide or the FedEx Rate Sheets for details on how shipping charges are calculated.



Address Information

Ship to:

Ship from:

Lucielle Lefebve, Property

Lucia Chiocchio, Esq.

Owner

Cuddy & Feder LLP

PMB 331

445 Hamilton Avenue

Suite 1400

MC MURRAY, PA

White Plains, NY

15317

10601

US

US

914-761-1300

9147611300

Shipment Information:

Tracking no.: 770055301305

Ship date: 03/18/2020

Estimated shipping charges: 10.29 USD

Package Information

Pricing option: FedEx Standard Rate Service type: FedEx Express Saver Package type: FedEx Envelope

Number of packages: 1 Total weight: 1 LBS Declared Value: 0.00 USD

Special Services:

Pickup/Drop-off: Use an already scheduled pickup at my location

Billing Information:

Bill transportation to: CuddyFeder-963

Your reference: 1844-3533

P.O. no.: Invoice no.: Department no.:

Thank you for shipping online with FedEx ShipManager at fedex.com.

Please Note

FedEx will not be responsible for any claim in excess of \$100 per package, whether the result of loss, damage, delay, non-delivery, misdelivery, or misinformation, unless you declare a higher value, pay an additional charge, document your actual loss and file a timely claim. Limitations found in the current FedEx Service Guide apply. Your right to recover from FedEx for any loss, including intrinsic value of the package, loss of sales, income interest, prict, attorney's fees, costs, and other forms of damage whether direct, incidental, consequential, or special is limited to the greater of \$100 or the authorized declared value. Recovery cannot exceed actual documented loss. Maximum for Items of extraordinary value is \$1000, e.g., jewelry, precious metals, negotiable instruments and other Items listed in our Service Guide. Written claims must be filed within strict time limits; Consult the applicable FedEx Service Guide for details

The estimated shipping charge may be different than the actual charges for your shipment. Differences may occur based on actual weight, dimensions, and other factors. Consult the applicable FedEx Service Guide or the FedEx Rate Sheets for details on how shipping charges are calculated.