### STATE OF CONNECTICUT CONNECTICUT SITING COUNCIL

IN	RE:	•
111	IXE.	

NEW CINGULAR WIRELESS PCS, LLC (AT&T)
PETITION FOR A DECLARATORY RULING,
PURSUANT TO CONNECTICUT GENERAL
STATUTES §4-176 AND §16-50K, FOR THE
INSTALLATION OF A WIRELESS
TELECOMMUNICATIONS FACILITY ON
PROPERTY LOCATED AT 97 HAMILTON AVENUE,
STAMFORD, CONNECTICUT.

#### PETITION FOR A DECLARATORY RULING: INSTALLATION HAVING NO SUBSTANTIAL ADVERSE ENVIRONMENTAL EFFECT

#### I. <u>Introduction</u>

Pursuant to Section 16-50j-38 and 16-50j-39 of the regulations of Connecticut State Agencies ("R.C.S.A."), New Cingular Wireless PCS LLC ("AT&T") hereby petitions the Connecticut Siting Council (the "Council") for a declaratory ruling ("Petition") that no Certificate of Environmental Compatibility and Public Need ("Certificate") is required under Section 16-50k(a) of the Connecticut General Statutes ("C.G.S.") to install a new wireless telecommunications facility at 97 Hamilton Avenue, Stamford, Connecticut (the "Site"). AT&T proposes to install two small panel antennas at the top of a new utility pole and an equipment cabinet with remote radio head units ("RRH") lower on the new pole. The property is owned by the State and controlled by the Department of Transportation ("DOT"). DOT's authorization for AT&T to file this Petition is included in **Attachment 1.** 

#### II. <u>Factual Background</u>

#### a. AT&T's Need for the Proposed Facility

AT&T identified a need for additional coverage and/or capacity relief in its network in this area of Stamford. The proposed Facility is designed to assure reliable wireless service to AT&T customers and emergency service providers in the area of the Facility location as well as travelers along the adjacent Amtrak railway. A new pole is proposed as the existing utility poles in the area where service is needed are unavailable for use by the electric utility due to the utility attachments on these poles.

#### b. The Site and AT&T's Proposed Tower Facility

The Site is DOT property in the vicinity of the Amtrak railway on the overpass on Hamilton Avenue. It is classified in the Light Industrial zoning district. Surrounding land uses include utility, commercial, and the railroad.

AT&T's proposed Facility consists of two small square panel antennas mounted at the top of a new class 2 utility pole at a centerline height of approximately 42' above grade level ("AGL"). An equipment cabinet with one RRH will be mounted lower on the pole so that the bottom of the equipment cabinet will be approximately 12'-9" AGL. Each panel antenna is 23.3" x 23.3" x 6.0" wide. AT&T will deploy their 700MHz, 1900 MHz and AWS frequencies which will be shared between the two antennas. Specifications and details of AT&T's proposed Facility are shown on the drawings included in **Attachment 2**. Also, included in **Attachment 3** is a structural analysis report confirming that AT&T's proposed Facility can be structurally accommodated.

No back-up power for AT&T's proposed Facility is proposed. Construction will take place five (5) days a week, only during weekdays (Monday – Friday). The total duration of construction and facility integration is 90 days. The approximate cost is \$50,000.

#### c. Council Jurisdiction

Connecticut law confers jurisdiction to the Council over certain "facilities", including "telecommunication towers." C.G.S. §16-50i(a)(6). State regulations define "tower" as a "structure, whether free standing or attached to a building or another structure... used principally to support one or more antennas for receiving or sending radio frequency signals...." R.C.S.A. §16-50j-2a(30)(A). Utility structures used to support electric distribution lines located within the public right-of-way fall under PURA's jurisdiction. Thus, PURA has jurisdiction over small cell facility attachments to utility poles that are part of the electric utility distribution system located within the public right-of-way. PURA, Docket 16-06-38.

Here, the proposed utility pole will be "used principally to support one or more antennas for receiving or sending radio frequency signals" and the pole will not, for the foreseeable future, be used as a part of the existing electric distribution system. Thus, the proposed utility pole along with AT&T's wireless equipment constitutes a "facility" over which the Council has jurisdiction. This jurisdiction is consistent with the Council's November 5, 2007 Opinion in Petition No. 809.

#### III. Discussion

a. The Proposed Small Cell Facility Will Not Have A Substantial Environmental Impact

For the reasons set forth below, AT&T respectfully submits that its proposed Facility will not have a substantial environmental impact and as such a Certificate pursuant to C.G.S. Section 16-50k(a) is not required.

#### i. Physical Environmental Effects

AT&T's proposed Facility will not result in any significant physical or environmental change to the Site or any adjacent parcels. Minimal disturbance is associated with the proposed Facility.

#### ii. <u>Visual Effects</u>

The photosimulation included in **Attachment 4** demonstrates that the limited nature of AT&T's proposed Facility will not result in any significant visual impacts to the area. Indeed, compared to the existing utility infrastructure in the area, AT&T's proposed Facility results in negligible visibility.

#### iii. FCC Compliance

The operation of AT&T's antenna will not increase the total radio frequency electromagnetic power density at the site to a level at or above applicable standards. A power density report is included in **Attachment 5**. The total radio frequency power density will be well within standards adopted by the Connecticut Department of Environmental Protection as set forth in Section 22a-162 of the Connecticut General Statutes and the MPE limits established by the Federal Communications Commission.

#### b. Notice of Petition Filing

Pursuant to R.C.S.A. Section 16-50j-40(a), notice of AT&T's intent to file this Petition was sent to each person appearing of record as an owner of property that abuts the site, as well as the appropriate municipal officials and government agencies as required by Section 16-50*l* of the C.G.S. Certification of such notice, a copy of the notice and the list of property owners is included in **Attachment 6** along with the map from the Town's GIS website used to identify abutting property owners. **Attachment 6** also includes a certification of service to municipal officials and government agencies to whom notice was sent.

#### IV. <u>Conclusion</u>

As set forth above, AT&T's proposed Facility will not result in any known adverse environmental effects. Therefore, and for all the foregoing reasons, AT&T petitions the Council for a determination that the proposed Facility does not require a Certificate of Environmental Compatibility and Public Need and that the Council issue an order approving same.

Respectfully submitted,

Lucia Chiocchio

On behalf of the Petitioner

Lucia Chrocchio

cc: Mayor Caroline Simmons, City of Stamford

Ralph Blessing, Land Use Bureau, City of Stamford

AT&T Nexius

Meyling Nunez, Cuddy & Feder, LLP

## ATTACHMENT 1



#### STATE OF CONNECTICUT

DEPARTMENT OF TRANSPORTATION 2800 BERLIN TURNPIKE, P.O. BOX 317546 NEWINGTON, CONNECTICUT 06131-7546 Phone: (203) 497-3344



February 17, 2022

Kelly Fay Site Acquisition Specialist Nexius Solutions, Inc 300 Apollo Drive, 2<sup>nd</sup> Floor Chelmsford, MA 01824

Subject:Letter of "No Objection"

AT&T Small Cellular Sites in Greenwich and Stamford 55 Henry Street, Greenwich – CRAN\_RCTB\_AMTRK\_001 Davis Avenue, Greenwich – CRAN\_RCTB\_AMTRK\_002 101 Indian Field Road, Greenwich – CRAN\_RCTB\_AMTRK\_007 97 Hamilton Avenue, Greenwich – CRAN\_RCTB\_AMTRK\_051

Dear Ms. Fay:

This is to confirm the Connecticut Department of Transportation ("Department") has reviewed the subject AT&T Small Cellular Site locations and has "no objection" to the locations proposed by AT&T for cellular facilities construction within the limits of State Rail Right-of-Way as described in the following plans submitted to the Department on October 27, 2021:

'AT&T New England\_Nexius\_CRAN, CRAN\_RCTB\_AMTRK\_001, USID 291841, 55 Henry Street, Greenwich, CT; Date: October 25, 2021; Map Author: Nexius Solutions, Inc.'; 'AT&T New England\_Nexius\_CRAN, CRAN\_RCTB\_AMTRK\_002, USID 291392, Davis Avenue, Greenwich, CT; Date: October 27, 2021; Map Author: Nexius Solutions, Inc.'; 'AT&T New England\_Nexius\_CRAN, CRAN\_RCTB\_AMTRK\_007, USID 291844, 101 Indian Field Road, Greenwich, CT; Date: October 25, 2021; Map Author: Nexius Solutions, Inc.'; and 'AT&T New England\_Nexius\_CRAN, CRAN\_RCTB\_AMTRK\_051, USID 291384, 97 Hamilton Avenue, Stamford, CT; Date: October 19, 2021; Map Author: Nexius Solutions, Inc.' referred to as "the Plans".

AT&T must continue to coordinate with the Department and Metro-North Railroad ("Railroad") for approval of all future engineering plan submissions and for master license agreement requirements and entry upon State-owned rail property.

If you have any questions please contact Ms. Julie Thomas, Supervising Rail Officer, by phone at (203) 497-3383 or by email at Julie. Thomas@ct.gov.

Respectfully,

DN: E=fric.Bergeron@ct.gov, CN="Bergeror Eric", OU=CCO, OU=District-3, OU=DOT-Users, DC=DOT, DC=CT, DC=GO Date: 2022 02 22 10:42:11-05:00'

Eric Bergeron

Assistant Rail Administrator Bureau of Public Transportation

# ATTACHMENT 2



PROJECT: NEW ENGLAND\_NEXIUS\_CRAN

CRAN\_RCTB\_AMTRK\_051 SITE NAME:

USID: 291384

PACE NUMBER: MRCTB045148

FA NUMBER: 15122383

PTN NUMBER: 2051A0SRPH

**COORDINATES:** 41.063400°, -73.520600°

SITE ADDRESS: 97 HAMILTON AVENUE

SHEET #

STAMFORD, CONNECTICUT 06902

PROJECT INFORMATION NEW ENGLAND\_NEXIUS\_CRAN PROJECT: CRAN\_RCTB\_AMTRK\_051 SITE NAME: USID: 291384 PACE NUMBER: MRCTB045148 LATITUDE: 41.063400° LONGITUDE: -73.520600° SITE ADDRESS: 97 HAMILTON AVENUE CITY. STATE ZIP: STAMFORD, CONNECTICUT 06902 COUNTY: FAIRFIELD JURISDICTION: CITY OF STAMFORD PROPOSED UTILITY POLE STRUCTURE TYPE: STRUCTURE OWNER: CT DOT GROUND ELEVATION: 33'± AMSL NEXIUS SOLUTIONS, INC. 300 APOLLO DRIVE, 2ND FLOOR CHELMSFORD, MA 01824 APPLICANT: SITE ACQUISTION: NICOLE CAPLANMASON EMAIL: nicole.caplanmason@nexius.com NEXIUS SOLUTIONS, INC. 300 APOLLO DRIVE, 2ND FLOOR CHELMSFORD, MA 01824 SITE ACQUISITION: NEXIUS SOLUTIONS, INC. 2595 NORTH DALLAS PARKWAY, SUITE 300 **ENGINEERING SERVICES:** FRISCO, TX 75034 EMAIL: JACK.PHIPPS@nexius.com

**AERIAL PHOTO** 

	T-1	TITLE SHEET
2	GN-1	GENERAL NOTES
ı	C-1	POLE ELEVATION
	C-2	AERIAL MAP TO SCALE
	C-3	SITE PLAN
	C-4	SITE SURVEY
	C-5	ENLARGED SITE PLAN
1	EQ-1	EQUIPMENT DETAILS
H	EQ-2	EQUIPMENT DETAILS
ı	EQ-3	EQUIPMENT DETAILS
	E-1	ELECTRICAL AND GROUNDING DETAILS
0		

SHEET INDEX

#### CODE COMPLIANCE

ALL WORK SHALL BE PERFORMED AND MATERIALS INSTALLED IN ACCORDANCE WITH CURRENT EDITIONS OF THE FOLLOWING APPLICABLE CODES AS ADOPTED BY THE LOCAL GOVERNING

2018 INTERNATIONAL BUILDING CODE 2020 NATIONAL ELECTRICAL CODE

SHEET TITLE

THESE DRAWINGS ARE DESIGNED TO THE LATEST CODES. THEY ALSO MEET THE ADOPTED CODE REQUIREMENTS OF THE JURISDICTION LISTED ABOVE.

#### SCOPE OF WORK

- 1. INSTALL NEW 50'-0" CLASS 2 (43'-0" A.G.L.) WOOD POLE.
- 2. INSTALL (2) PROPOSED ANTENNAS SIDE MOUNTED ON PROPOSED POLE PER MANUFACTURER'S SPECIFICATIONS.
- 3. INSTALL (1) EQUIPMENT ENCLOSURE CONTAINING (1) RRU8843 AND (2) PSU AC 08 ON PROPOSED POLE PER MANUFACTURER'S SPECIFICATIONS.
- 4. INSTALL (1) METER AND (1) AC DISTRIBUTION BOX/SERVICE DISCONNECT ON PROPOSED POLE PER MANUFACTURER'S SPECIFICATIONS AND PER UTILITY AND NEC REQUIREMENTS.

ANY DEVIATION THAT DIFFERS SUBSTANTIALLY FROM WHAT IS SHOWN ON THE CONSTRUCTION DRAWINGS MUST BE APPROVED BY THE ENGINEER OF RECORD. NO CHANGES THAT ALTER THE CHARACTER OF THE WORK CAN BE MADE DURING CONSTRUCTION WITHOUT ISSUING A CHANGE ORDER.

DRAWING SCALES ARE INTENDED FOR 11" X 17" SIZE PRINTED MEDIA ONLY. ALL OTHER SIZES ARE DEEMED "NOT TO SCALE".



STRUCTURE PHOTO





TO OBTAIN LOCATION OF PARTICIPANTS UNDERGROUND FACILITIES BEFORE YOU DIG IN CONNECTICUT, CONTACT CALL BEFORE YOU DIG OLL FREE: 1-800-922-4455 OR www.cbyd.com

Know what's below. Requires MIN OF 2 WORKING DAYS NOTICE OF YOU dig. BEFORE YOU EXCAVATE

nexius

A&E OFFICE: 2595 NORTH DALLAS PARKWAY, SUITE 300 FRISCO, TX 75034 (972) 581-9888

PREPARED BY:



550 COCHITUATE ROAD, FRAMINGHAM, MA 01701

FOR ZONING



DATE SIGNED: 02/10/22

NEXIUS SOLUTIONS, INC. CONNECTICUT FIRM NO.PEC.0001571 FIRM REGISTRATION RENEWAL 3/17/22. PE LICENSE RENEWAL 1/31/23

)	E			SUBMI	TTALS		
		REV	DATE	DESCRI	PTION		BY
	┪	Α	05/05/21	FOR RE	/IEW		GS
_	_	В	10/19/21	FOR RE	/IEW		РМ
		0	11/02/21	FINAL Z	D		GS
		1	01/25/22	REVISED	FINAL ZD		GS
		2	02/10/22	REVISED	FINAL ZD		GS
		CHECK	(FD RY:		CHECKED	DATF.	

02/10/22

SITE NAME: CRAN\_RCTB\_AMTRK\_051

**291384** SITE ADDRESS 97 HAMILTON AVENUE

STAMFORD, CONNECTICUT 06902

SHEET TITLE:

TITLE SHEET

SHEET NUMBER:

#### GENERAL CONSTRUCTION

- ALL SITE WORK SHALL BE COMPLETED AS INDICATED ON THE DRAWINGS AND PROJECT SPECIFICATIONS.
- 2. GENERAL CONTRACTOR SHALL VISIT THE SITE AND FAMILIARIZE HIMSELF WITH ALL CONDITIONS AFFECTING THE PROPOSED WORK. GENERAL CONTRACTOR IS RESPONSIBLE FOR FAMILIARIZING HIMSELF WITH ALL CONTRACT DOCUMENTS, FIELD CONDITIONS, DIMENSIONS, AND CONFIRMING THAT THE WORK MAY BE ACCOMPLISHED AS SHOWN PRIOR TO PROCEEDING WITH CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER PRIOR TO THE COMMENCEMENT OF WORK.
- ALL MATERIALS FURNISHED AND INSTALLED SHALL BE IN STRICT ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS, ORDINANCES, AND ISSUE ALL APPROPRIATE NOTICES
- ALL WORK CARRIED OUT SHALL COMPLY WITH ALL APPLICABLE MUNICIPAL AND UTILITY COMPANY SPECIFICATIONS AND LOCAL JURISDICTIONAL CODES, ORDINANCES, AND APPLICABLE REGULATIONS.
- 5. PLANS ARE NOT TO BE SCALED. SPACING BETWEEN EQUIPMENT IS THE MINIMUM REQUIRED CLEARANCE. THEREFORE, IT IS CRITICAL TO FIELD VERIFY DIMENSIONS, SHOULD THERE BE ANY QUESTIONS REGARDING THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING A CLARIFICATION FROM THE ENGINEER PRIOR TO PROCEEDING WITH THE WORK. DETAILS ARE INTENDED TO SHOW DESIGN INTENT. MODIFICATIONS MAY BE REQUIRED TO SUIT JOB DIMENSIONS OR CONDITIONS AND SUCH MODIFICATIONS SHALL BE INCLUDED AS PART OF WORK AND PREPARED BY THE ENGINEER PRIOR TO PROCEEDING WITH WORK.
- THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT AND MATERIALS IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS UNLESS SPECIFICALLY STATED OTHERWISE.
- 7. IF THE SPECIFIED EQUIPMENT CANNOT BE INSTALLED AS SHOWN ON THESE DRAWINGS, THE CONTRACTOR SHALL PROPOSE AN ALTERNATIVE INSTALLATION SPACE FOR APPROVAL BY THE ENGINEER PRIOR TO PROCEEDING.
- CONTRACTOR SHALL NOTIFY THE GENERAL CONTRACTOR OF ANY EXISTING CONDITIONS
  THAT DEVIATE FROM THE DRAWINGS PRIOR TO BEGINNING CONSTRUCTION.
- GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE SAFETY OF WORK AREA, ADJACENT AREAS AND BUILDING OCCUPANTS THAT ARE LIKELY TO BE AFFECTED BY THE WORK UNDER THIS CONTRACT. WORK SHALL CONFIRM TO ALL OSHA REQUIREMENTS AND THE LOCAL JURISDICTION.
- 10. GENERAL CONTRACTOR SHALL COORDINATE WORK AND SCHEDULE WORK ACTIVITIES WITH OTHER DISCIPLINES.
- 11. WORK SHALL BE DONE IN A PROFESSIONAL MANNER BY COMPETENT EXPERIENCED PERSONNEL IN ACCORDANCE WITH APPLICABLE CODES AND THE BEST ACCEPTED PRACTICE.
- 12. SEAL PENETRATIONS THROUGH FIRE RATED AREAS WITH UL LISTED MATERIALS APPROVED BY LOCAL JURISDICTION. CONTRACTOR SHALL KEEP AREA CLEAN, HAZARD FREE, AND DISPOSE OF ALL DEBRIS.
- 13. CONTRACTOR SHALL PROVIDE WRITTEN NOTICE TO THE CONSTRUCTION MANAGER 48 HOURS PRIOR TO COMMENCEMENT OF WORK.
- 14. THE CONTRACTOR SHALL PROTECT EXISTING IMPROVEMENTS, PAVEMENTS, CURBS, LANDSCAPING AND STRUCTURES. ANY DAMAGED PART SHALL BE REPAIRED AT CONTRACTOR'S EXPENSE TO THE SATISFACTION OF THE OWNER.
- 15. THE CONTRACTOR SHALL CONTACT UTILITY LOCATING SERVICES PRIOR TO THE START OF CONSTRUCTION
- GENERAL CONTRACTOR SHALL COORDINATE AND MAINTAIN ACCESS FOR ALL TRADES AND CONTRACTORS TO THE SITE AND/OR BUILDING.
- 17. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR SECURITY OF THE SITE FOR THE DURATION OF CONSTRUCTION UNTIL JOB COMPLETION.
- 18. CONTRACTORS SHALL BE RESPONSIBLE FOR OBTAINING ALL PERMITS AND INSPECTIONS REQUIRED FOR CONSTRUCTION. IF CONTRACTOR CANNOT OBTAIN A PERMIT. THEY MUST NOTIFY THE GENERAL CONTRACTOR IMMEDIATELY.
- 19. THE GENERAL CONTRACTOR SHALL MAINTAIN IN GOOD CONDITION ONE COMPLETE SET OF PLANS WITH ALL REVISIONS, ADDENDA, AND CHANGE ORDERS ON THE PREMISES AT ALL TIMES.
- 20. THE GENERAL CONTRACTOR SHALL PROVIDE PORTABLE FIRE EXTINGUISHERS WITH A RATING OF NOT LESS THAN 2-A TO 2-A:10-B:C AND SHALL BE WITHIN 25 FEET OF TRAVEL DISTANCE TO ALL PORTIONS OF WHERE THE WORK IS BEING COMPLETED DURING CONSTRUCTION.
- 21. ALL EXISTING ACTIVE SEWER, WATER, GAS, ELECTRIC, COMMUNICATIONS, AND OTHER UTILITIES SHALL BE PROTECTED AT ALL TIMES, AND WHERE REQUIRED FOR THE PROPER EXECUTION OF THE WORK, SHALL BE RELOCATED AS DIRECTED BY THE ENGINEER. EXTREME CAUTION SHOULD BE USED BY THE CONTRACTOR WHEN EXCAVATING OR DRILLING PIERS AROUND OR NEAR UTILITIES. CONTRACTOR SHALL PROVIDE SAFETY TRAINING FOR THE WORKING CREW. THIS SHALL INCLUDE BUT NOT BE LIMITED TO: FALL PROTECTION, CONFINED SPACE, ELECTRICAL SAFETY, AND TRENCHING / EXCAVATION.
- 22. ALL EXISTING INACTIVE SEWER, WATER, GAS, ELECTRIC, AND OTHER UTILITIES WHICH INTERFERE WITH THE EXECUTION OF THE WORK, SHALL BE REMOVED, CAPPED, PLUGGED OR OTHERWISE DISCONNECTED AT POINTS WHICH WILL NOT INTERFERE WITH THE EXECUTION OF THE WORK, AS DIRECTED BY THE RESPONSIBLE ENGINEER, AND SUBJECT TO THE APPROVAL OF THE OWNER AND/OR LOCAL UTILITIES.

- 23. CONTRACTOR SHALL MINIMIZE DISTURBANCE TO THE EXISTING SITE DURING CONSTRUCTION. EROSION CONTROL MEASURES, IF REQUIRED DURING CONSTRUCTION, SHALL BE IN CONFORMANCE WITH THE FEDERAL AND LOCAL JURISDICTION FOR EROSION AND SEDIMENT CONTROL.
- 24. THE AREAS OF THE OWNER'S PROPERTY DISTURBED BY THE WORK SHALL BE GRADED TO A UNIFORM SLOPE AND STABILIZED TO PREVENT EROSION.
- 25. NO FILL OR EMBANKMENT MATERIAL SHALL BE PLACED ON FROZEN GROUNDING. FROZEN MATERIALS, SNOW OR ICE SHALL NOT BE PLACED IN ANY FILL OR EMBANKMENT.
- 26. THE SUBGRADE SHALL BE BROUGHT TO A SMOOTH UNIFORM GRADE AND COMPACTED TO 95 PERCENT STANDARD PROCTOR DENSITY UNDER PAVEMENT AND STRUCTURES AND 80 PERCENT STANDARD PROCTOR DENSITY IN OPEN SPACE.
- 27. ALL TRENCHES IN PUBLIC RIGHT OF WAY SHALL BE BACKFILLED WITH FLOWABLE FILL OR OTHER MATERIAL PRE-APPROVED BY THE LOCAL JURISDICTION.
- 28. ALL NECESSARY RUBBISH, STUMPS, DEBRIS, STICKS, STONES, AND OTHER REFUSE SHALL BE REMOVED FROM THE SITE AND DISPOSED OF IN A LAWFUL MANNER.
- 29. ALL BROCHURES, OPERATING AND MAINTENANCE MANUALS, CATALOGS, SHOP DRAWINGS, AND OTHER DOCUMENTS SHALL BE TURNED OVER TO THE GENERAL CONTRACTOR AT COMPLETION OF CONSTRUCTION AND PRIOR TO PAYMENT.
- CONTRACTOR SHALL SUBMIT A COMPLETE SET OF AS—BUILT REDLINES TO THE GENERAL CONTRACTOR UPON COMPLETION OF PROJECT AND PRIOR TO FINAL PAYMENT
- 31. NO OUTDOOR STORAGE OR SOLID WASTE CONTAINERS ARE PROPOSED.
- 32. ALL MATERIAL SHALL BE FURNISHED AND WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE LATEST GROUNDING STANDARD.
- 33. CONTRACTOR SHALL REMOVE ALL TRASH AND DEBRIS FROM THE SITE ON A DAILY BASIS.
- 34. INFORMATION SHOWN ON THESE DRAWINGS WAS OBTAINED FROM SITE VISITS AND/OR DRAWINGS PROVIDED BY THE SITE OWNER.
- 35. CONTRACTORS SHALL NOTIFY THE ENGINEER OF ANY DISCREPANCIES PRIOR TO ORDERING MATERIAL OR PROCEEDING WITH CONSTRUCTION.
- 36. ALL CABLE INSTALLATIONS TO FOLLOW MANUFACTURER'S INSTRUCTIONS AND RECOMMENDATIONS.

#### ANTENNA MOUNTING

- DESIGN AND CONSTRUCTION OF ANTENNA SUPPORTS SHALL CONFORM TO CURRENT ANSI/TIA-222 OR APPLICABLE LOCAL CODES.
- ALL STEEL MATERIALS SHALL BE GALVANIZED AFTER FABRICATION IN ACCORDANCE WITH ASTM A123 "ZINC (HOT-DIP GALVANIZED) COATINGS ON IRON AND STEEL PRODUCTS", UNLESS NOTED OTHERWISE.
- ALL BOLTS, ANCHORS AND MISCELLANEOUS HARDWARE SHALL BE GALVANIZED IN ACCORDANCE WITH ASTM A153 "ZINC-COATING (HOT-DIP) ON IRON AND STEEL HARDWARE", UNLESS NOTED OTHERWISE.
- DAMAGED GALVANIZED SURFACES SHALL BE REPAIRED BY COLD GALVANIZING IN ACCORDANCE WITH ASTM A780.
- ALL ANTENNA MOUNTS SHALL BE INSTALLED WITH LOCK NUTS, DOUBLE NUTS AND SHALL BE TORQUED TO MANUFACTURER'S RECOMMENDATIONS.
- CONTRACTOR SHALL INSTALL ANTENNA PER MANUFACTURER'S RECOMMENDATION FOR INSTALLATION AND GROUNDING.
- 7. PRIOR TO SETTING ANTENNA AZIMUTHS AND DOWNTILTS, ANTENNA CONTRACTOR SHALL CHECK THE ANTENNA MOUNT FOR TIGHTNESS AND ENSURE THAT THEY ARE PLUMB. ANTENNA AZIMUTHS SHALL BE SET FROM TRUE NORTH AND BE ORIENTED WITHIN +/- 5% AS DEFINED BY THE RFDS. ANTENNA DOWNTILTS SHALL BE WITHIN +/- 0.5% AS DEFINED BY THE RFDS. REFER TO ND-00246.

#### TORQUE REQUIREMENTS

- ALL RF CONNECTIONS SHALL BE TIGHTENED WITH A TORQUE WRENCH AND A TORQUE MARK INDICATED ON BOTH SIDES OF THE CONNECTION.
- 2. ALL GROUNDING AND ANTENNA HARDWARE SHALL ALL BE TIGHTENED WITH A TORQUE WRENCH AND A TORQUE MARK INDICATED ON THE NUT SIDE STARTING FROM THE THREADS TO THE SOLID SURFACE, TORQUE TO THE FOLLOWING VALUES:
- 2.1. ALL 5/16" ANTENNA HARDWARE TIGHTENED TO 9 FT-LBS.
- 2.2. ALL 1/2" ANTENNA HARDWARE TIGHTENED TO 43 FT-LBS.
  2.3. ALL DIN-TYPE CONNECTIONS TIGHTENED TO 18-22 FT-LBS.
- 2.4. ALL N-TYPE CONNECTIONS TIGHTENED TO 15-20 IN-LBS.

#### COAXIAL CABLE NOTES

TYPES AND SIZES OF THE ANTENNA CABLE ARE BASED ON ESTIMATED LENGTHS.
PRIOR TO ORDERING CABLE, CONTRACTOR SHALL VERIFY ACTUAL LENGTH BASED ON
CONSTRUCTION LAYOUT AND NOTIFY THE PROJECT MANAGER IF ACTUAL LENGTHS
EXCEED ESTIMATED LENGTHS.

- 2. CONTRACTOR SHALL VERIFY THE DOWNTILT OF EACH ANTENNA WITH A DIGITAL LEVEL.
- CONTRACTOR SHALL CONFIRM COAX COLOR CODING PRIOR TO CONSTRUCTION. REFER TO "ANTENNA SYSTEM LABELING STANDARD" ND-00027 LATEST VERSION.
- 4. USE 1/2" COAX ON ANTENNAS UNLESS OTHERWISE SPECIFIED.
- FILL VOID AROUND CABLES AT CONDUIT OPENING WITH FOAM SEALANT TO PREVENT WATER INTRUSION.
- ALL COAXIAL CABLE SHALL BE SECURED TO THE DESIGNED SUPPORT STRUCTURE, IN AN APPROVED MANNER. AT DISTANCES NOT TO EXCEED 4'-0".
- CONTRACTOR SHALL FOLLOW ALL MANUFACTURER'S RECOMMENDATIONS REGARDING BOTH THE INSTALLATION AND GROUNDING OF ALL COAXIAL CABLES, CONNECTORS, ANTENNAS, AND ALL OTHER EQUIPMENT.
- 8. ALL OUTDOOR RF CONNECTIONS SHALL BE WEATHERPROOFED USING COLD SHRINK OR HEAT SHRINK ON ALL ANTENNA AND RADIO CONNECTIONS,

#### GENERAL CABLE AND EQUIPMENT NOTES

- PRIOR TO INSTALLATION CONTRACTOR SHALL VERIFY MAKE AND MODEL OF ANTENNA, DIPLEXERS, AND COAX CONFIGURATION.
- 2. ALL CONNECTIONS FOR HANGERS, SUPPORTS, BRACING, ETC. SHALL BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS.
- CONTRACTOR SHALL REFERENCE THE STRUCTURAL ANALYSIS/DESIGN DRAWINGS FOR DIRECTIONS ON CABLE DISTRIBUTION/ROUTING.
- 4. IF REQUIRED TO PAINT ANTENNAS AND/OR COAX: 4.1. TEMPERATURE SHALL BE ABOVE 50° F.
  - 4.2. PAINT COLOR MUST BE APPROVED BY BUILDING OWNER/LANDLORD.
  - 4.3. FOR REGULATED TOWERS, FAA/FCC APPROVED PAINT IS REQUIRED.
  - 4.4. DO NOT PAINT OVER COLOR CODING OR ON EQUIPMENT MODEL NUMBERS.
- 5. ALL PROPOSED GROUND BAR DOWNLEADS ARE TO BE TERMINATED TO THE EXISTING ADJACENT GROUND BAR DOWNLEADS A MINIMUM DISTANCE OF 4'-0" BELOW GROUND BAR. TERMINATIONS MAY BE EXOTHERMIC OR COMPRESSION.
- 6. NO BOLT THREADS TO PROTRUDE MORE THAN 1-1/2".

NOTES REVISION 20200526



ENABLING SMARTER CONNECTIONS

A&E OFFICE: 2595 NORTH DALLAS PARKWAY, SUITE 300 FRISCO, TX 75034 (972) 581-9888



AT&T 550 COCHITUATE ROAD, FRAMINGHAM, MA 01701

FOR ZONING



DATE SIGNED: 02/10/22

NEXIUS SOLUTIONS, INC. CONNECTICUT FIRM NO.PEC.0001571 FIRM REGISTRATION RENEWAL 3/17/22. PE LICENSE RENEWAL 1/31/23

THIS DOCUMENT IS THE DESIGN PROPERTY AND COPYRIG OF NEXIUS AND FOR THE EXCLUSIVE USE BY THE TITLE CLIENT. DUPLICATION OR USE WITHOUT THE EXPRESS

SITE INFORMATION:

SITE NAME:

CRAN\_RCTB\_AMTRK\_051

USID:

USID: 291384 SITE ADDRESS:

02/10/22


97 HAMILTON AVENUE STAMFORD, CONNECTICUT 06902

SHEET TITLE:

GENERAL NOTES

SHEET NUMBER:

GN-1

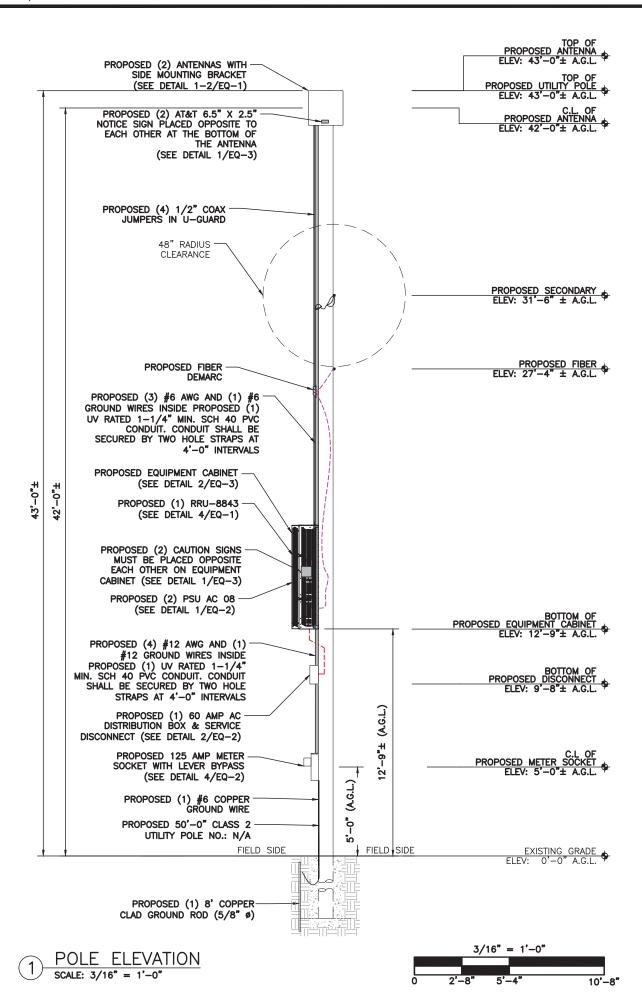

#### NOTES:

- AN ANALYSIS OF THE CAPACITY OF THE EXISTING STRUCTURE TO SUPPORT THE PROPOSED LOADING HAS NOT BEEN COMPLETED

- AN ANALYSIS OF THE CAPACITY OF THE EXISTING STRUCTURE TO SUPPORT THE PROPOSED LOADING HAS NOT BEEN COMPLETED BY NEXIUS. DRAWINGS ARE SUBJECT TO CHANGE PENDING OUTCOME OF A STRUCTURAL ANALYSIS.

  AT&T SHALL MAKE ARRANGEMENTS WITH THE LOCAL ELECTRICAL UTILITY, TO ADJUST THE POSITION OF THE EXISTING OVERHEAD COMMUNICATION LINES AT SUBJECT UTILITY POLE TO PROVIDE THE REQUIRED CLEARANCE FOR THE INSTALLATION OF THE PROPOSED AT&T ANTENNA. THE PROPOSED INSTALLATION OF THE ANTENNA AND ALL APPURTENANCES SHALL MEET THE REQUIREMENTS OF THE POWER COMPANY AND THE 2020 NATIONAL ELECTRICAL SAFETY CODE.

  VERIFY EQUIPMENT B.O.M. AGAINST RFDS TO ENSURE YOU HAVE THE RIGHT ANTENNA. NOTIFY YOUR PROJECT PM IF THERE IS A DISCREPANCY IN THE ANTENNA OR MOUNTING BRACKET.

  IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY, PRIOR TO THE ONSET OF CONSTRUCTION, THAT THE SUPPORTING STRUCTURE(S) AND MOUNTING SYSTEM(S) HAVE BEEN DEEMED STRUCTURALLY ADEQUATE BY A LICENSED PROFESSIONAL ENGINEER TO SUPPORT THE EXISTING AND PROPOSED EQUIPMENT AND ASSOCIATED CONSTRUCTION LOADS, INCLUDING BUT NOT LIMITED TO THOSE DEPICTED, HEREIN. THE CONTRACTOR SHALL ASSUME THE FULL—LIABILITY AND RISK ASSOCIATED WITH THE INSTALLATION OF THE PROPOSED EQUIPMENT AND/OR APPURTENANCES IF PERFORMED WITHOUT SAID PASSING STRUCTURAL ANALYSIS OR EVALUATION. IF THE RESULT OF THE ANALYSIS REQUIRES THE STRUCTURE BE STRENGTHENED OR MODIFIED; SUCH MODIFICATIONS SHALL BE PROPERLY INSTALLED AND COMPLETED PRIOR TO THE ONSET OF CONSTRUCTION.



PHOTO SIMULATION

PREPARED BY:

### nexius

ENABLING SMARTER CONNECTIONS

A&E OFFICE: 2595 NORTH DALLAS PARKWAY, SUITE 300 FRISCO, TX 75034 (972) 581-9888

CLIENT



550 COCHITUATE ROAD, FRAMINGHAM, MA 01701

FOR ZONING



DATE SIGNED: 02/10/22

NEXIUS SOLUTIONS, INC. CONNECTICUT FIRM NO.PEC.0001571 FIRM REGISTRATION RENEWAL 3/17/22. PE LICENSE RENEWAL 1/31/23

		SUBMITTALS	
REV	DATE	DESCRIPTION	BY
Α	05/05/21	FOR REVIEW	GS
В	10/19/21	FOR REVIEW	РМ
0	11/02/21	FINAL ZD	GS
1	01/25/22	REVISED FINAL ZD	GS
2	02/10/22	REVISED FINAL ZD	GS
CHECK	(FD BY:	CHECKED DATE:	

02/10/22

SITE INFORMATION:

SITE NAME: CRAN\_RCTB\_AMTRK\_051 **291384** 


SITE ADDRESS:

97 HAMILTON AVENUE STAMFORD, CONNECTICUT 06902

SHEET TITLE:

POLE ELEVATIONS

SHEET NUMBER:

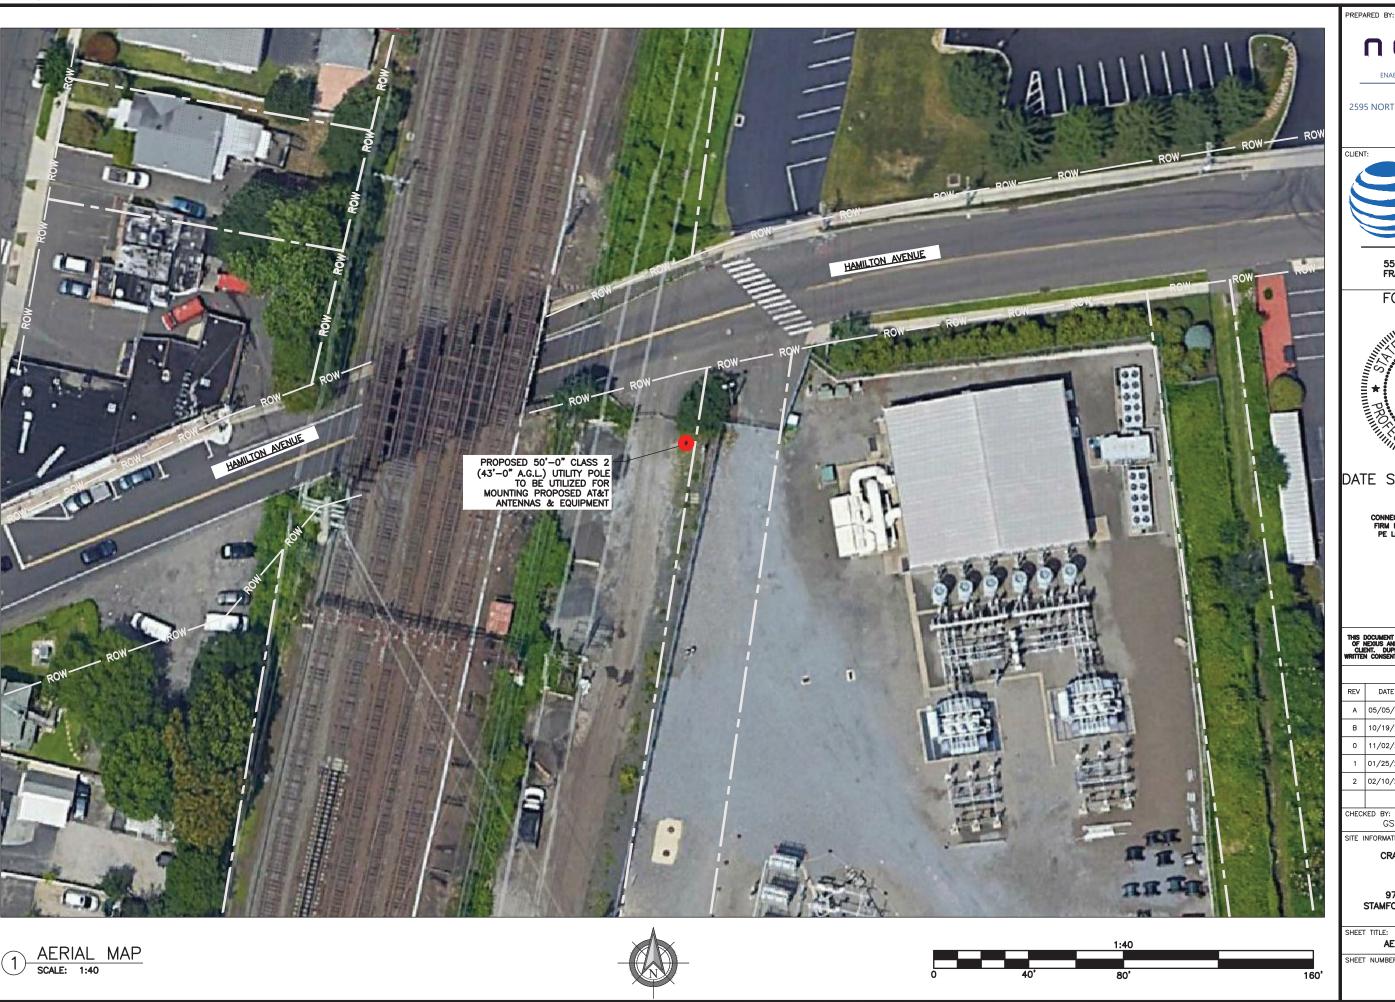

### nexius

ENABLING SMARTER CONNECTIONS

A&E OFFICE: 2595 NORTH DALLAS PARKWAY, SUITE 300 FRISCO, TX 75034 (972) 581-9888



AT&T 550 COCHITUATE ROAD, FRAMINGHAM, MA 01701

FOR ZONING



DATE SIGNED: 02/10/22

NEXIUS SOLUTIONS, INC. CONNECTICUT FIRM NO.PEC.0001571 FIRM REGISTRATION RENEWAL 3/17/22. PE LICENSE RENEWAL 1/31/23

		SUBMI	TTALS	
REV	DATE	DESCRI	PTION	BY
Α	05/05/21	FOR RE	VIEW	GS
В	10/19/21	FOR RE	VIEW	РМ
0	11/02/21	FINAL Z	D	GS
1	01/25/22	REVISED	FINAL ZD	GS
2	02/10/22	REVISED	FINAL ZD	GS
CHECH	KED BY:		CHECKED DATE:	

SITE NAME:

CRAN\_RCTB\_AMTRK\_051 USID: **291384** 

SITE ADDRESS:


97 HAMILTON AVENUE


02/10/22


STAMFORD, CONNECTICUT 06902


AERIAL MAP TO SCALE

SHEET NUMBER:

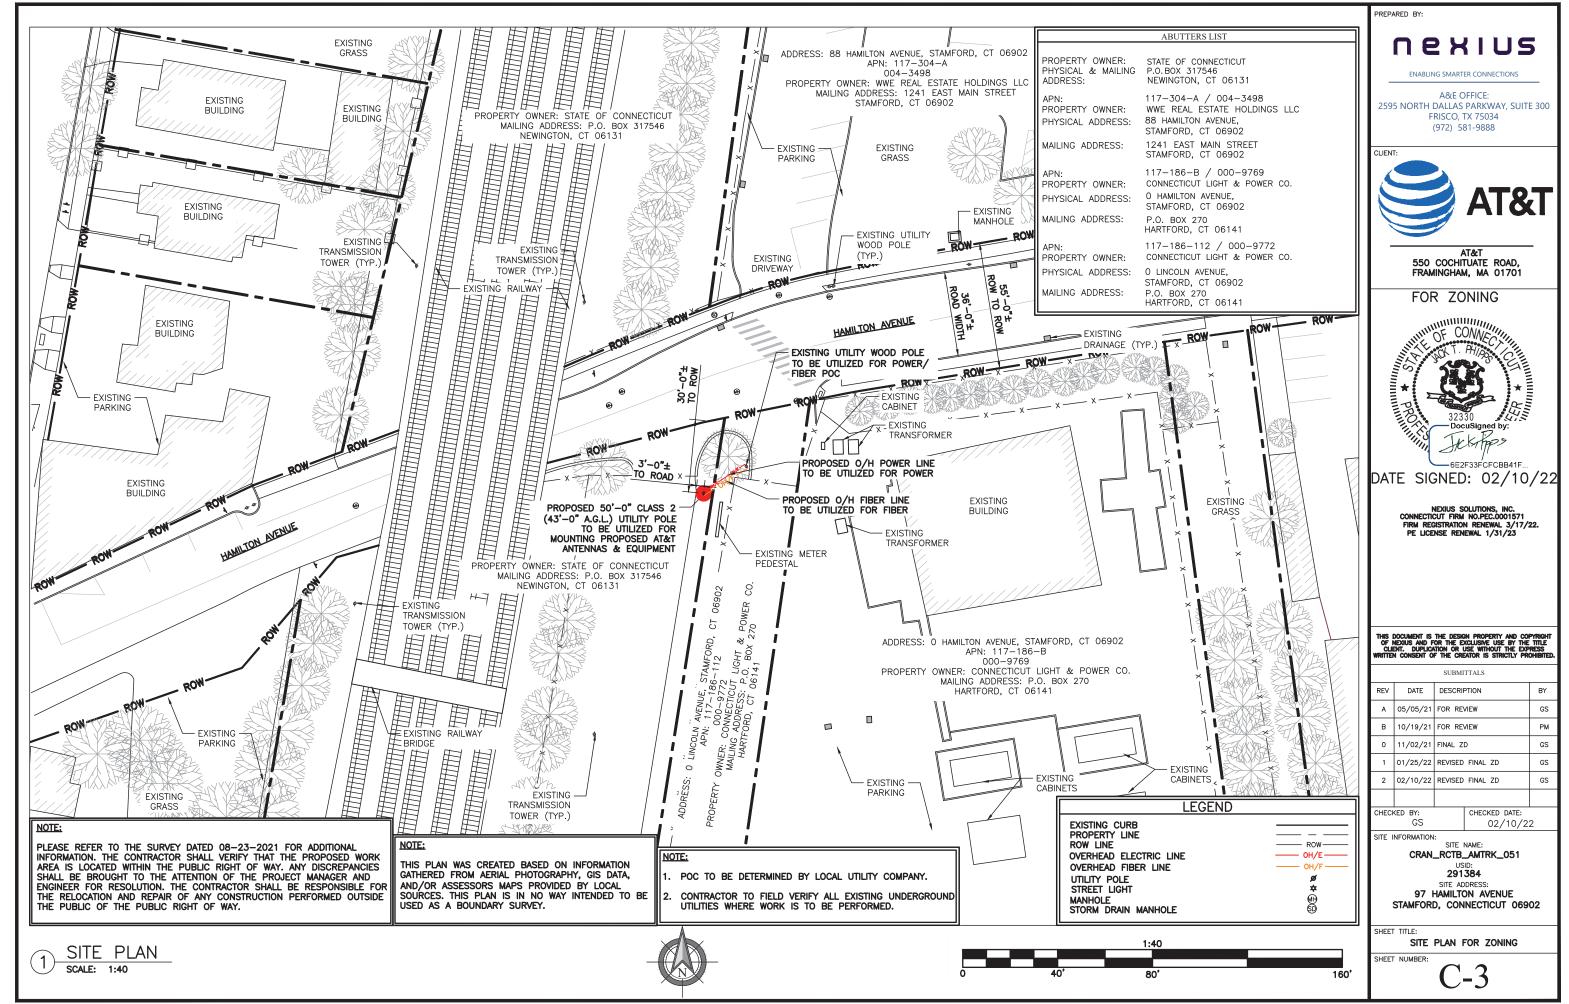

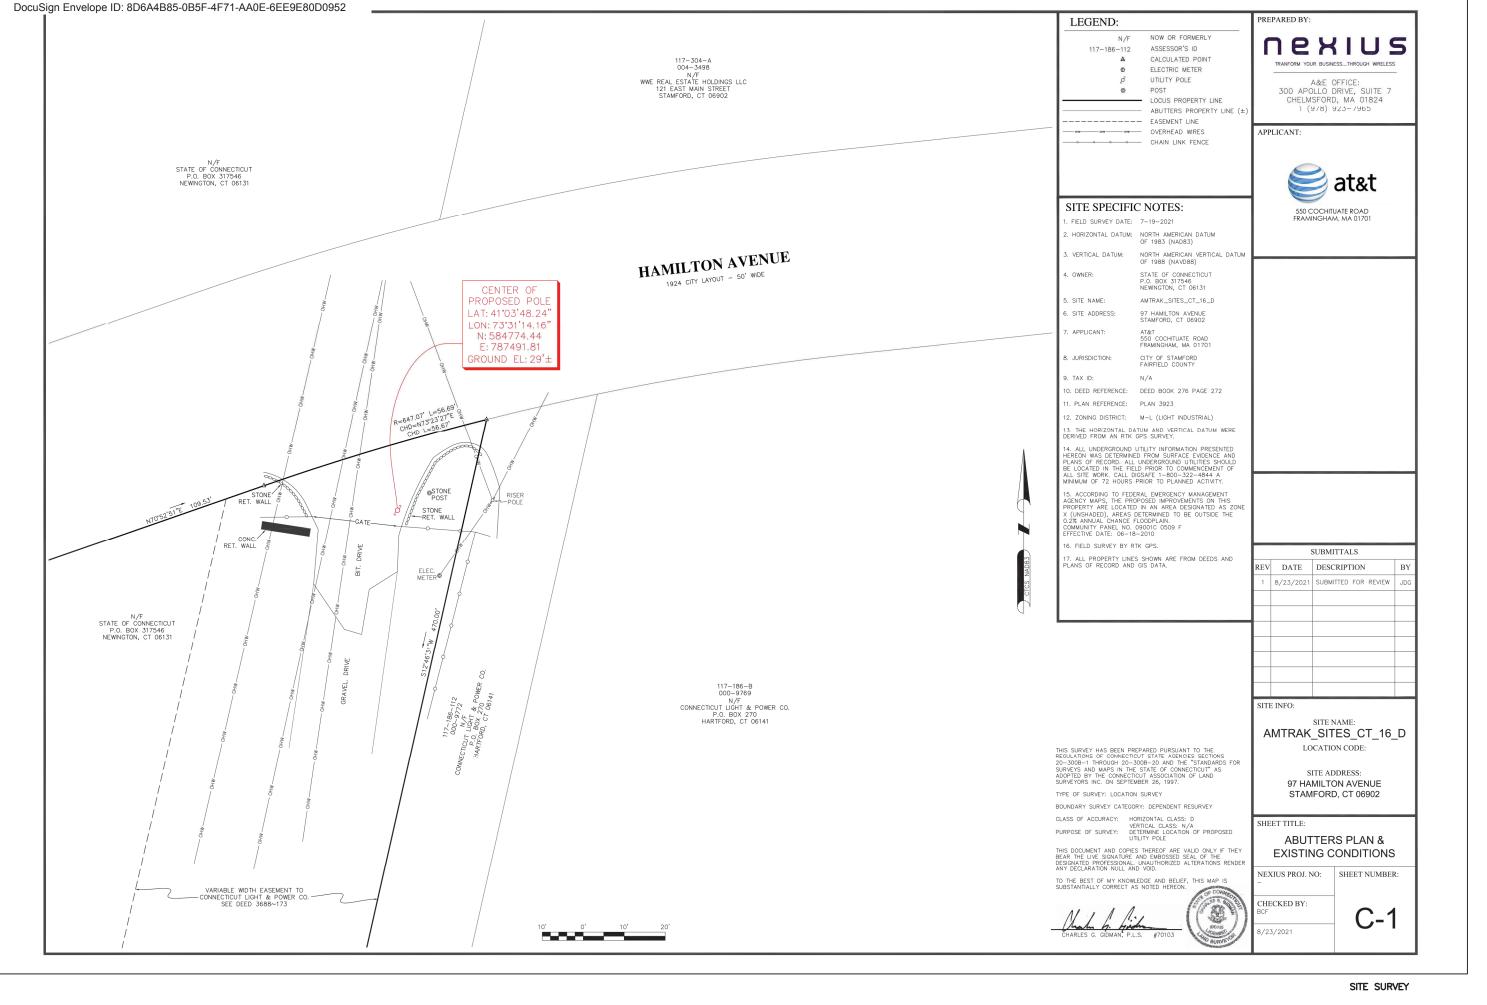


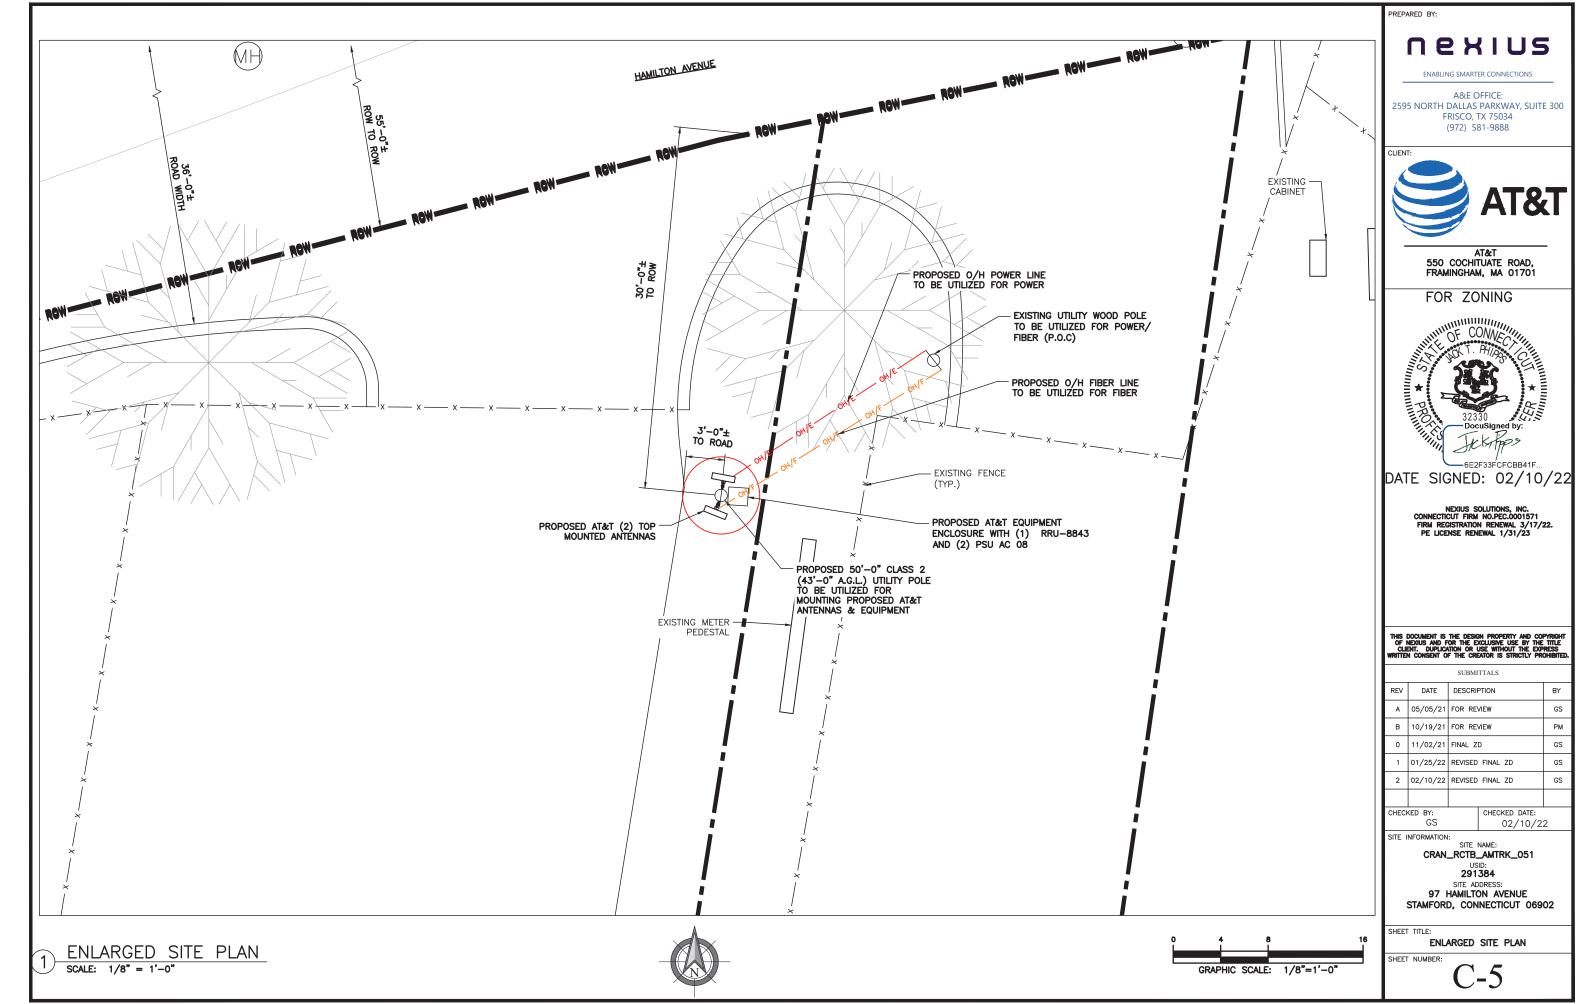


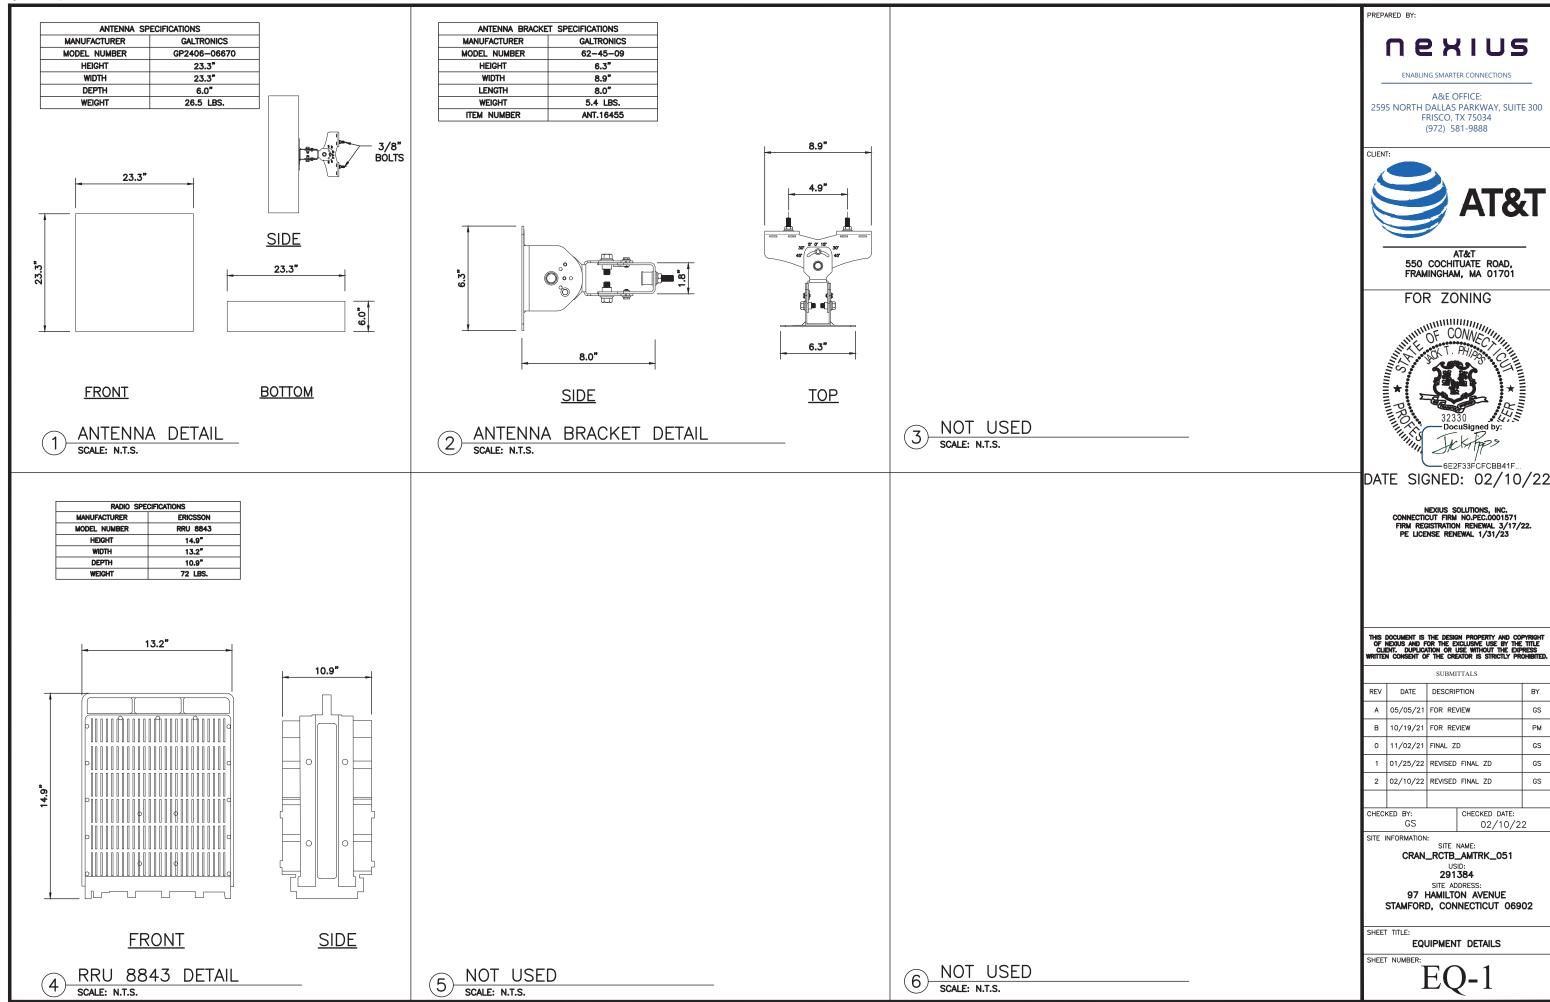

PSU SPE	CIFICATIONS
MANUFACTURER	ERICSSON
MODEL NUMBER	PSU AC 08
HEIGHT	7.1"
WIDTH	10.8"
DEPTH	2.7"
WEIGHT	11.5 LBS.

AC DISTRIBUTION B	OX SPECIFICATIONS
MANUFACTURER	RAYCAP
MODEL NUMBER	RSCAC-9556-P-240-D
HEIGHT	12.39"
WIDTH	8.59"
DEPTH	5.65"
WEIGHT	8.0 LBS.
ITEM NUMBER	CEQ.21617



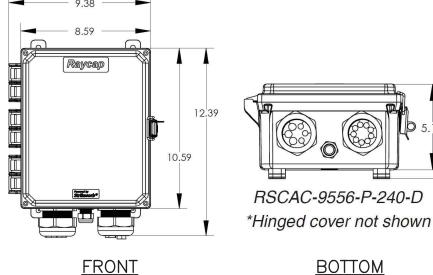



RSCAC-9556-P-240-D

INSIDE


4.84"

PSU AC 08 DETAIL SCALE: N.T.S.

10.8"

AC DISTRIBUTION BOX DETAIL SCALE: N.T.S.

METER SPE	CIFICATIONS
MANUFACTURER	MILBANK
MODEL NUMBER	U2272-RL-5T9-BL
HEIGHT	18.5"
WIDTH	10.0"
DEPTH	4.84"

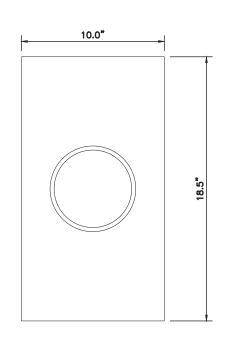

**FRONT** 

SIDE

NOT USED SCALE: N.T.S.

METER MAIN WITH BYPASS DETAIL

A&E OFFICE: 2595 NORTH DALLAS PARKWAY, SUITE 300 FRISCO, TX 75034 (972) 581-9888 550 COCHITUATE ROAD, FRAMINGHAM, MA 01701 FOR ZONING -6E2F33FCFCBB41F. DATE SIGNED: 02/10/22 NEXIUS SOLUTIONS, INC. CONNECTICUT FIRM NO.PEC.0001571 FIRM REGISTRATION RENEWAL 3/17/22. PE LICENSE RENEWAL 1/31/23 REV DATE DESCRIPTION A 05/05/21 FOR REVIEW B 10/19/21 FOR REVIEW 0 11/02/21 FINAL ZD 1 01/25/22 REVISED FINAL ZD 2 02/10/22 REVISED FINAL ZD

CHECKED BY:

SHEET TITLE:

SHEET NUMBER:

SITE INFORMATION:

BY

GS РМ

GS

GS

CHECKED DATE:

SITE NAME: CRAN\_RCTB\_AMTRK\_051 291384 SITE ADDRESS:

97 HAMILTON AVENUE STAMFORD, CONNECTICUT 06902

EQUIPMENT DETAILS


02/10/22

PREPARED BY:

nexius

ENABLING SMARTER CONNECTIONS

DRAWING SCALES ARE INTENDED FOR 11" X 17" SIZE PRINTED MEDIA ONLY. ALL OTHER SIZES ARE DEEMED "NOT TO SCALE". THIS DOCUMENT IS THE DESIGN PROPERTY AND COPYRIGHT OF NEXIUS AND FOR THE EXCLUSIVE USE BY THE TITLE CLIENT. DUPLICATION OR USE WITHOUT THE EXPRESS WRITTEN CONSENT OF THE CREATOR IS STRICTLY PROHIBITED.

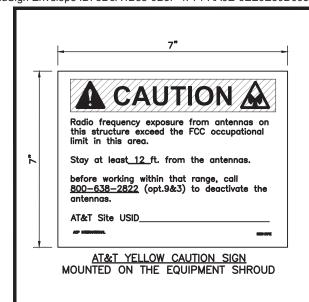


#### NOTE:

SIGNAGE <u>MUST BE ORDERED FROM ACP INTL SIGNS INC.</u>, ACCORDING TO THE GUIDANCE IN SECTION 6.2 "ACPT INTL SIGNS ORDERING PROCESS (CRAN) IN ATT-790-202-062 DAS (DISTRIBUTED ANTENNA SYSTEM) AND CRAN (CENTRALIZED RADIO ACCESS NETWORK) SIGNAGE STANDARD."

http://apex.web.att.com/bookview/bookview.jsp?bookname=att-790-202-062&fullte 1.ORDERING PART NUMBER FOR THIS SIGN IS: ABOVE R801RPE


2.SIGN DIMENSIONS ARE: HEIGHT= 7", WIDTH=7"

3.USE THE SUPPLIED NUMBER PAD TO ENTER THE NUMBER 12. INTO THE BLANK SPACE AS SHOWN IN THE SIGN DIAGRAM.

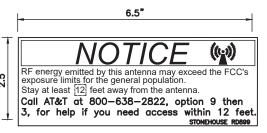

AT&T NOTICE SIGN (TOTAL OF 2).


TO BE PLACED (1) NOTICE STICKER AT THE BOTTOM OF EACH ANTENNA.

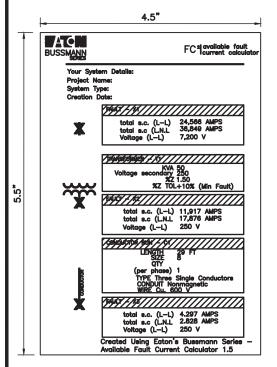


AT&T FAULT CURRENT SIGN MOUNTED ON THE DISCONNECT

SIGNAGE DETAILS


SCALE: N.T.S.

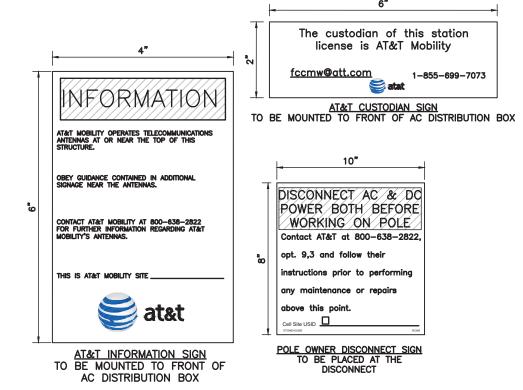

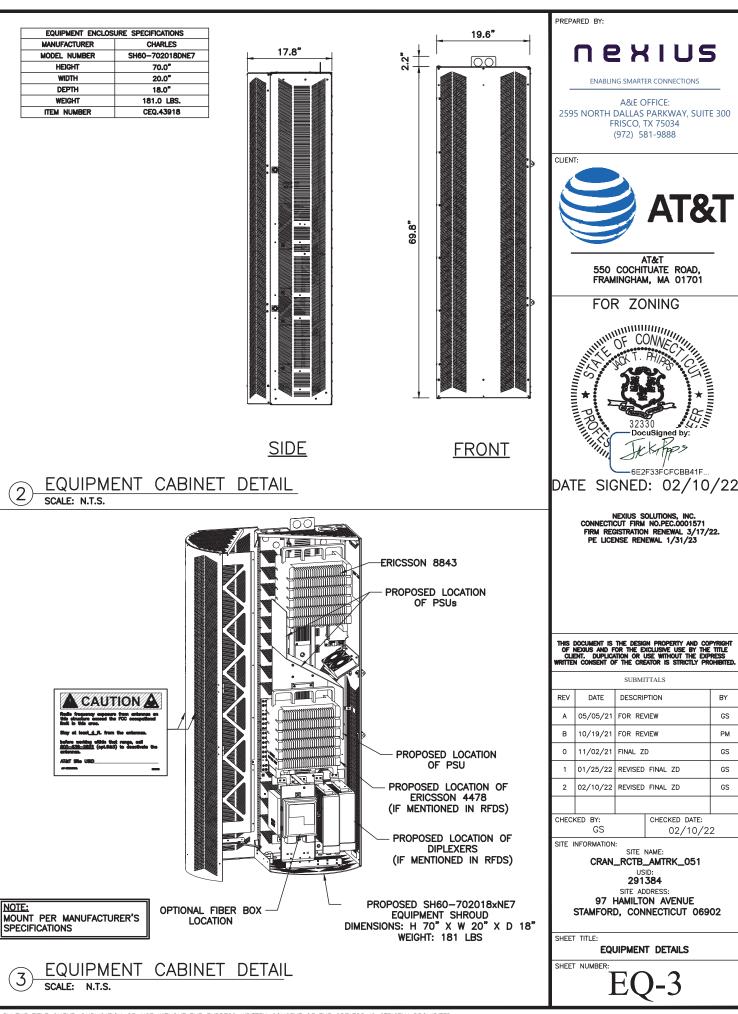

#### NOTES:

- 1. EQUIPMENT AND LAYOUT SHOWN IS FOR DIAGRAMMATIC PURPOSES ONLY. REFER TO PROPOSED SITE PLAN AND POLE ELEVATION FOR ACTUAL EQUIPMENT LOCATIONS AND CONDITIONS.
- 2. ALL ELECTRICAL WORK MUST MEET THE REQUIREMENTS OF THE NATIONAL ELECTRICAL CODE AND THE NATIONAL ELECTRICAL SAFETY CODE.
- 3. BONDING AND GROUNDING TO MEET APPLICABLE NEC REQUIREMENTS.

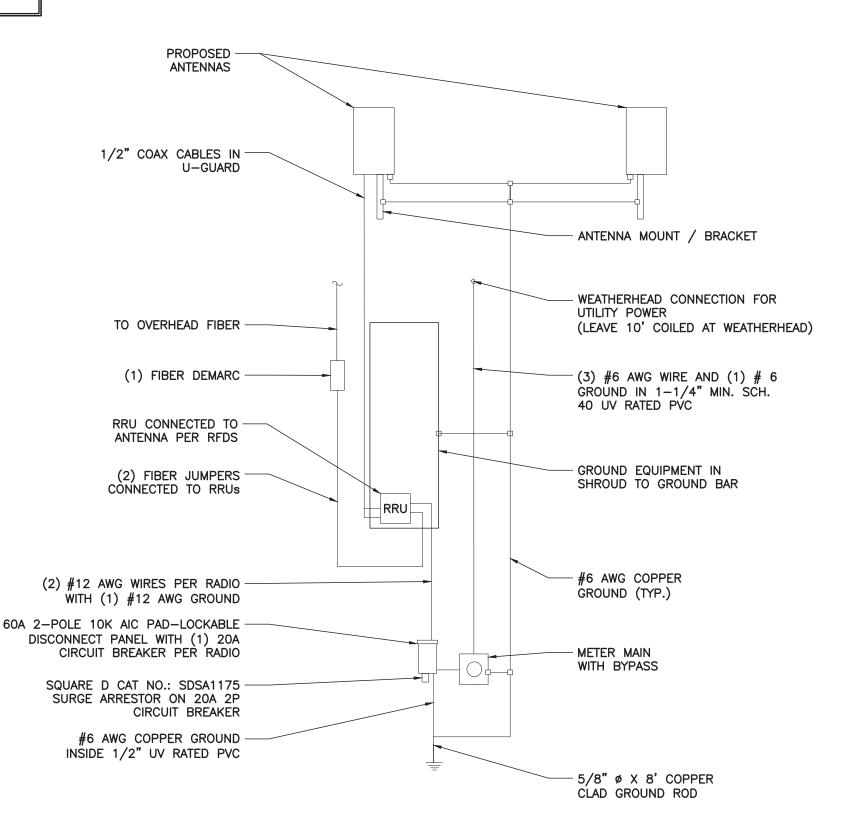

nexius

ENABLING SMARTER CONNECTIONS

A&E OFFICE: 2595 NORTH DALLAS PARKWAY, SUITE 300 FRISCO, TX 75034 (972) 581-9888

PREPARED BY:



550 COCHITUATE ROAD, FRAMINGHAM, MA 01701

FOR ZONING



DATE SIGNED: 02/10/22

NEXIUS SOLUTIONS, INC. CONNECTICUT FIRM NO.PEC.0001571 FIRM REGISTRATION RENEWAL 3/17/22. PE LICENSE RENEWAL 1/31/23

		SUBMI	TTALS	
REV	DATE	DESCRI	PTION	BY
Α	05/05/21	FOR RE	VIEW	GS
В	10/19/21	FOR RE	VIEW	РМ
0	11/02/21	FINAL Z	D	GS
1	01/25/22	REVISED	FINAL ZD	GS
2	02/10/22	REVISED	FINAL ZD	GS
CHECH	KED BY:	•	CHECKED DATE:	

SITE INFORMATION: SITE NAME:

CRAN\_RCTB\_AMTRK\_051 291384 SITE ADDRESS:

97 HAMILTON AVENUE

02/10/22

STAMFORD, CONNECTICUT 06902

ELECTRICAL AND GROUNDING DETAILS


SHEET NUMBER:

GENERAL WIRING DIAGRAM SCALE: N.T.S.

# ATTACHMENT 3

### nexius

# Engineering Structural Analysis Report

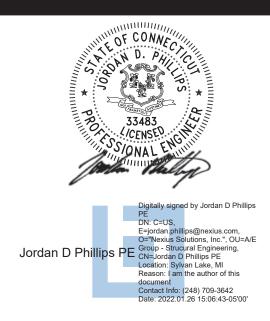

CRAN\_RCTB\_AMTRK\_051
Proposed
MRCTB045148
1/26/2022
ADEQUATE



### **Engineering Structural Analysis Report**

**Reference:** Assessment of the **Proposed** 50-ft Class 2 Wooden Pole.

Cascade ID - Candidate: CRAN RCTB AMTRK 051

Site Address: 97 HAMILTON AVENUE, STAMFORD, CT 06902

We are pleased to provide you with our engineering assessment of the 50-ft Wooden Pole located at 97 HAMILTON AVENUE, STAMFORD, CT 06902.

The pole analyzed for this project is a 50-ft tall, Class 2 pole. The program calculates an applied wind load on the surface area of the attachments and multiplies that by the height of the attachment to determine a bending moment in the pole (WL load and BM). It also calculates the vertical loads applied and adds the moment due to the applied gravity loads. The calculated moment is compared to the pole capacity and capacity utilization is calculated. The final calculations for this pole indicate a capacity utilization is 64.4%. This is below the maximum allowable capacity utilization, 100%, so it is determined that the applied loads and configuration is acceptable for this pole.

Existing information such as pole height, line types, line heights and depth of set are based on site photographs gathered by Nexius staff. Line and equipment heights are determined based on standard spacing requirements set forth by the pole owner and standard industry practices. If any of these assumptions are not valid or made in error, the conclusion of this assessment may be affected and NEXIUS should review the effect on the structural integrity of the pole.

To the best of our knowledge and based on the result of this pole loading calculation, the additional loadings to the existing pole will not compromise the structural integrity of this utility/streetlight pole. This pole loading calculation satisfies the minimum requirements set forth by the National Electric Code, National Electric Safety Code, ANSI O5 utility pole standards, and the pole owner's attachment standards. If any of these assumptions are not valid or made in error, the conclusion of this assessment may be affected and NEXIUS should review the effect on the structural integrity of the pole.

Please contact us if you have any questions.

#### ASSUMPTIONS AND LIMITATIONS OF ANALYSIS

Please note the following assumptions and limitations inherent in this analysis and report:

A) The equipment configuration is as per "15122383.AE201.220125.REV 1" Drawings by NEXIUS, dated 01/25/2022.

If any of these assumptions are not valid or made in error, the conclusion of this assessment may be affected and NEXIUS should review the effect on the structural integrity of the pole.

#### nexius

Propose	d Final Equipment	
Item	Model	Quantity
Antenna	Galtronics GP2406-06670 w/ Mount Bracket	2
125-Amp Meter	MILBANK U2272-RL-5T9-BL	1
AC Distribution Box	RAYCAP RSCAC-9556-P-240-D	1
Equipment Enclosure	Charles SH60-702018DNE7	1
Radio	Ericsson 8843	1*
PSU	Ericsson PSU AC 08	2*

<sup>\*</sup>Located inside Equipment Enclosure

#### **CONCLUSIONS & RECOMMENDATIONS:**

The **proposed** 50-ft wooden pole has been found **ADEQUATE** to support its overall and total load subject to the attached Standard Conditions on **page 4** and the above-mentioned assumptions and limitations.

Please note that the soils report for the foundation were not available to us at the time of this analysis, therefore, the soil conditions have been assumed.

Should you have any questions, comments or require additional information, please do not hesitate to call.

Sincerely,


Analysis by: Salman Al Jurdi Reviewed by: Jordan Phillips, PE



### Standard Conditions for Providing Structural Consulting Services on Existing Structures

- 1. If the existing conditions are not as represented in this structural report or attached sketches, we should be contacted to evaluate the significance of the deviation and revise the structural assessment accordingly.
- 2. The structural analysis has been performed assuming that the structure is in "like new" condition. No allowance was made for excessive corrosion, damaged or missing structural members, loose bolts, etc. If there are any known deficiencies in the structure that potentially compromise structural integrity, we should be made aware of the deficiencies. If we are aware of a deficiency that exists in a structure at the time of our analysis, a general explanation of the structural concern due to the deficiency will be included in the structural report, but the deficiency will not be reflected in capacity calculations.
- 3. The structural analysis provided is an assessment of the primary load carrying capacity of the structure. We provide a limited scope of service, in that we have not verified the capacity of every weld, plate, connection detail, etc. In most cases, structural fabrication details are unknown at the time of our analysis, and the detailed field measurement of this information is beyond the scope of our services. In instances where we have not performed connection/component capacity calculations, it is assumed that existing manufactured connection/component develop the full capacity of the primary members being calculated.
- 4. We will not accept any liability for the adequacy of the existing foundation system unless accurate structural foundation drawings are provided with a site-specific geotechnical report. Foundations will be assumed installed per the drawings with no construction deficiency due to initial installation or age.
- 5. Miscellaneous items such as antenna mounts, coax supports, etc. have not been designed, detailed, or specified as part of our work. It is assumed that material of adequate size and strength will be purchased from a reputable component manufacturer. The attached report and sketches are schematic in nature and should not be used to fabricate or purchase hardware and accessories to be attached to the structure. We recommend field measurement of the structure before fabricating or purchasing new hardware and accessories. We are not responsible for proper fit and clearance of hardware and accessory items in the field.
- 6. The structural analysis has been performed considering minimum code requirements or recommendations. If alternate wind, ice, or deflection criteria are to be considered, then we shall be made aware of the alternate criteria.

33 Feet	Elevation:	-73.520600 Deg Elevation:		inde:	<b>41.063400 Deg</b> Longitude:	41.0634		Latitude:
								Center (AGL):
		4.00	No Wind Pressure (psf):	°N	Ht. Reduc:	42'-0" Fiber Stress Ht. Reduc:	42'-0"	Proposed RAD
1.50	39.53 Vertical LF:	39.53	5,200 Wind Speed (mph):	5,200	ress (psi):	CT DOT Allowable Stress (psi):	CT DOT	Pole Owner:
1.65	<b>0.50</b> Wire Tension LF:	0.50	8,000 Ice Thickness (in):	8,000	ress (psi):	G/L Fiber St	97 Hamilton Ave G/L Fiber Stress (psi):	Site Address:
2.50	Heavy Transverse Wind LF:	Heavy	41.61 Loading District:	41.61	erence (in):	291384 G/L Circumference (in):	291384	USID:
0.65	<b>B</b> Pole Strength Factor:	B	7.00 Construction Grade:	7.00	:h (ft):	Setting Dept	MRCTB045148 Setting Depth (ft):	PACE #:
Unguyed	Status	Rule 250B Status	THERN PINE NESC Rule:	THERN PINE	nos	AT&T Species:	AT&T	Customer:
Deadend	NESC Structure Type:	NESC	<b>50 / 2</b> Code:	50 / 2	/ Class:	N/A Pole Length / Class:	A/N	Pole Num:

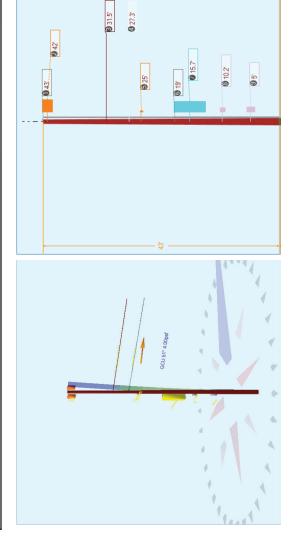

Pole Capacity Utilization (%)	zation (%)	Height (ft)	Wind Angle (deg)
Maximum	64.4	0.0	51.2
Groundline	64.4	0.0	51.2
Vertical	5.5	19.3	51.2

Pole Moments (ft-lb)	(q	Load Angle (deg)	Wind Angle (deg)
Max Cap Util	63,230	59.4	51.2
Groundline	63,230	59.4	51.2
GL Allowable	98,873		

<sup>2</sup> Worst Wind Per Guy Wire

\*Includes Load Factor(s)

Groundline Load Summary - Reporting Angle Mode: Load - Reporting Angle: 59.4°	- Reporting A	ngle Mode: L	oad - Reportin	g Angle: 59.4	٥					
	Shear Load* (lbs)	Applied Load (%)	Bending Moment (ft-lb)	Applied Moment (%)	Pole Capacity (%)	Bending Stress (+/- psi)	Vertical Load (Ibs)	Vertical Stress (psi)	Total Stress (psi)	Pole Capacity (%)
Powers	823	35.2	25,909	41.0	26.2	1,363	16	0	1,363	26.2
Comms	823	35.2	22,485	35.6	22.7	1,183	29	0	1,183	22.8
GenericEquipments	61	2.6	2,538	4.0	2.6	134	103	~	134	2.6
PowerEquipments	186	8.0	2,357	3.7	2.4	124	464	က	127	2.4
Pole	376	16.1	7,990	12.6	8.1	420	2,422	18	438	8.4
Risers	70	3.0	1,936	3.1	2.0	102	93	~	103	2.0
Insulators	0	0.0	15	0.0	0.0	1	6	0	1	0.0
Pole Load	2,339	100.0	63,230	100.0	64.0	3,327	3,136	23	3,350	64.4
Pole Reserve Capacity			35,643		36.0	1,873			1,850	35.6

Load Summary by Owner - Reporting Angle Mode: Load - Reporting Angle: 59.4°	Reporting An	gle Mode: Los	ાd - Reporting	Angle: 59.4°						
	Shear Load* (lbs)	Applied Load (%)	Bending Moment (ft-lb)	Applied Moment (%)	Pole Capacity (%)	Bending Stress (+/- psi)	Vertical Load (lbs)	Vertical Stress (psi)	Total Stress (psi)	Pole Capacity (%)
<undefined></undefined>	1,963	83.9	55,240	87.4	55.9	2,907	714	5	2,912	26.0
СТ DOT	376	16.1	7,990	12.6	8.1	420	2,422	18	438	8.4
Totals:	2,339	100.0	63,230	100.0	64.0	3,327	3,136	23	3,350	64.4

Detailed Load Components:	Components:														
Power		Owner	Height (ft)	Horiz. Offset (in)	Cable Diameter (in)	Sag at Max Temp (ft)	Cable Weight (Ibs/ft)	Lead/Span Length (ft)	Span Angle (deg)	Wire Length (ft)	Tension (Ibs)	Tension Moment* (ft-lb)	Offset Moment* (ft-lb)	Wind Moment* (ft-lb)	Moment at GL* (ft-lb)
Secondary	DUPLEX 6 AWG		31.50	6.94	0.5370	0.27	0.071	30.0	64.0	30.0	200	25,904	8	1	25,923
											Totals:	25,904	8	1	25,923

Comm		Owner	Height (ft)	Horiz. Offset (in)	Cable Diameter (in)	Sag at Max Temp (ft)	Cable Weight (lbs/ft)	Lead/Span Si Length Ar (ft) (d	Span Angle (deg)	Wire Length (ft)	Tension (lbs)	Tension Moment* (ft-lb)	Offset Moment* (ft-lb)	Wind Moment* (ft-lb)	Moment at GL* (ft-lb)
Overlashed Bundle	M9		27.33	7.44	0.2420	0.01	0.104	30.0	64.0	30.0	200	22,475	4	6	22,489
Telco	BELOPTIX AT072 - 72 FIBERS - ARMORED (0.657)		27.28	7.44	0.6570		0.190	30.0	64.0	30.0			5	က	∞
											Totals:	22,475	6	13	22,497

\*Includes Load Factor(s)

GenericEquipment	1	Owner	Height	Horiz.	Offset	Rotate	Unit	Unit	Unit	Unit	Unit	Offset	Wind	Moment
	<u> </u>	_	(£)	Offset	Angle	Angle	Weight	Height	Depth	Diameter	Length	Moment*	Moment*	at GL*
		_		(ii)	(deg)	(deg)	(sql)	(ii)	(ii)	(ii)	(ii)	(ft-lb)	(ft-lb)	(ft-lb)
Box	5G NR		42.00	14.04	0.0	0.0	31.90	23.30	00.9	;	23.30	28	1,245	1,273
Вох	5G NR		42.00	14.04	180.0	0.0	31.90	23.30	00.9	;	23.30	-28	1,245	1,216
Вох	Fiber Demarc		25.00	6.34	180.0	0.0	2.00	7.00	2.50	ŀ	3.00	-2	51	49
											Totals:	-2	2,541	2,539

PowerEquipment		Owner	Height	Horiz.	Offset	Rotate	Unit	Unit	Unit	Unit	Unit	Offset	Wind	Moment
			(#)	Offset (in)	Angle (deg)	Angle (deg)	Weight (lbs)	Height (in)	Depth (in)	Diameter (in)	Length (in)	Moment* (ft-lb)	Moment* (ft-lb)	at GL* (ft-lb)
Box	Equipment Enclosure		15.67	15.66	180.0	180.0	276.00	70.00	18.00	:	20.00	-257	2,413	2,156
Box	RAYCAP		10.18	10.29	180.0	180.0	8.00	12.39	5.65	;	8.59	4-	119	115
Box	Meter socket		2.00	11.32	180.0	180.0	25.00	18.50	4.84	;	10.00	-14	102	88
											Totals:	-276	2,634	2,358

Riser		Owner	Height	Horiz.	Offset	Rotate	Unit	Unit	Unit	Unit	Unit	Offset	Wind	Moment
			(#)	Offset (in)	Angle (deg)	Angle (deg)	Weight (Ibs)	Height (in)	Depth (in)	Diameter (in)	Length (in)	Moment* (ft-lb)	Moment* (ft-lb)	at GL* (ft-lb)
Riser- 2" 45.0°	Riser- 2"		19.00	6.81	45.0	45.0	19.00	228.00	2.00	2.00	228.00	10	43	53
Riser- 2" 300.0°	Riser- 2"		43.00	6.81	300.0	300.0	43.00	516.00	2.00	2.00	516.00	-12	1,895	1,884
											Totals:	7	1,939	1,937


Insulator		Owner	Height (ft)	Horiz. Offset (in)	Offset Angle (deg)	Rotate Angle (deg)	Unit Weight (Ibs)	Unit Diameter (in)	Unit Length (in)	Offset Moment* (ft-lb)	Wind Moment* (ft-lb)	Moment at GL* (ft-lb)
Spool	Spool 2.5"		31.50	0.00	0.06	0.0	1.00	2.50	2.12	-	=======================================	12
Bolt	Single Bolt		27.33	0.00	0.0	0.0	5.00	3.00	00.00	2	0	2
									Totals:	3	11	15

	_ 5	0
	Buckling Load Factor of Safety	18.18
	Buckling Load Applied at Height (lbs)	570.17
	Buckling Load Capacity at Height (lbs)	56,994
	Pole Tip Height (ft)	43.00
	Ice Density (pcf)	27.00
	Pole Density (pcf)	00.09
	Modulus of Elasticity (psi)	1.60e+6
	Diameter at Modulus of GL Elasticity (in) (psi)	13.25
	Diameter at Tip (in)	96.7
	Minimum Buckling Diameter at GL (in)	14.24
	Buckling Section Diameter (in)	12.47
	Buckling Section Height (% Buckling	32.68
ing	Buckling Column Height* (ft)	19.27
Pole Buckling	Buckling Constant	2.00

User:jordan.phillips NEXIUS OCP:5.03

### O-Calc® Pro Schematic View

Pole Identification: N/A Report Created: 1/26/2022 File: MRCTB045148.pplx

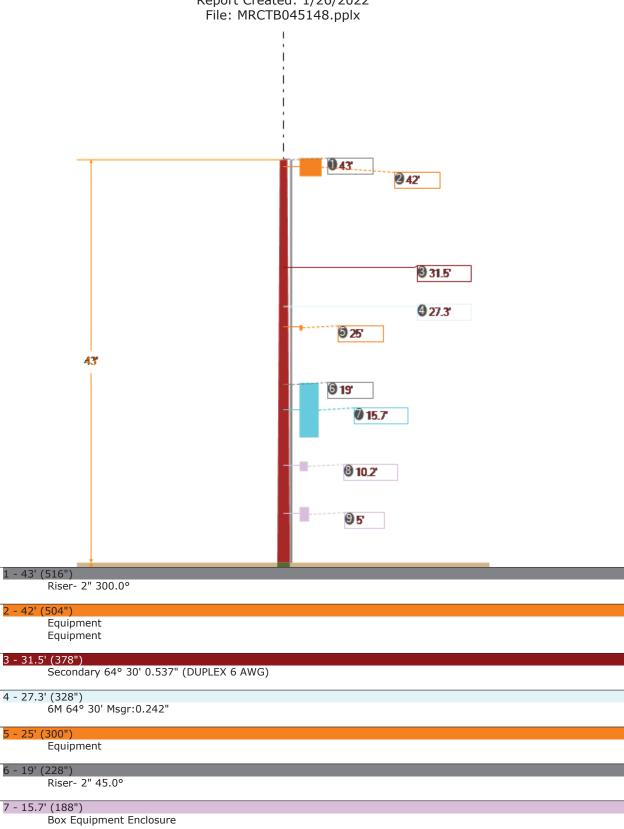

#### 8 - 10.2' (122.2")

Box meter socket

#### 9 - 5' (60")


Box meter socket


# ATTACHMENT 4



CRAN\_RCTB\_AMTRK\_051
MRCTB045148
97 HAMILTON AVENUE,
STAMFORD, CT 06902
Photo-simulation produced on 01/25/2022



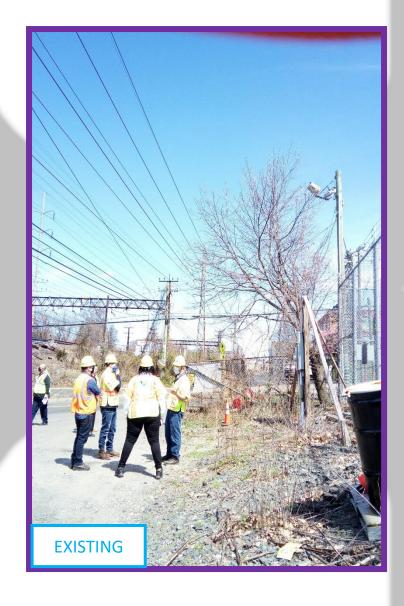

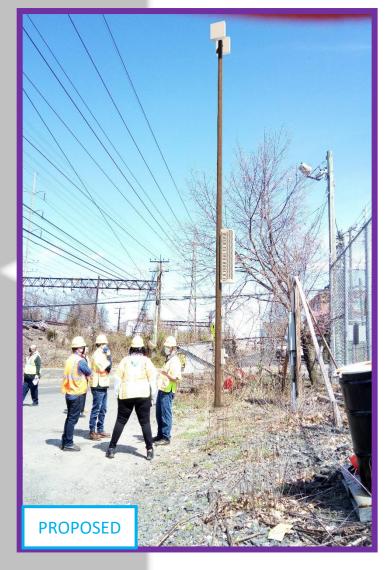

# ATTACHMENT 5

# Radio Frequency – Electromagnetic Energy (RF-EME) Compliance Report

Site No. CRAN\_RCTB\_AMTRK\_051
MRCTB045148
CRAN\_RCTB\_AMTRK\_051
97 Hamilton Avenue
Stamford, Connecticut 06902
Fairfield County
41.06340000; -73.52060000 NAD83
Utility Pole

The proposed AT&T installation will be in compliance with FCC regulations upon proper installation of recommended signage.

EBI Project No. 6222000610 February 4, 2022



Prepared for:

AT&T Mobility, LLC c/o Nexius 2999 Oak Road, Suite 110 Walnut Creek, California 94597

Prepared by:



#### **TABLE OF CONTENTS**

EXE	CUTIVE SUMMARY	I
1.0	FEDERAL COMMUNICATIONS COMMISSION (FCC) REQUIREMENTS	3
2.0	AT&T RF EXPOSURE POLICY REQUIREMENTS	5
3.0	WORST-CASE PREDICTIVE MODELING	5
4.0	RECOMMENDED SIGNAGE/COMPLIANCE PLAN	7
5.0	SUMMARY AND CONCLUSIONS	8
6.0	LIMITATIONS	8

#### **APPENDICES**

Appendix A Personnel Certifications
Appendix B Compliance/Signage Plan

#### **EXECUTIVE SUMMARY**

#### **Purpose of Report**

EnviroBusiness Inc. (dba EBI Consulting) has been contracted by AT&T Mobility, LLC to conduct radio frequency electromagnetic (RF-EME) modeling for AT&T Site CRAN\_RCTB\_AMTRK\_051 located at 97 Hamilton Avenue in Stamford, Connecticut to determine RF-EME exposure levels from proposed AT&T wireless communications equipment at this site. As described in greater detail in Section 1.0 of this report, the Federal Communications Commission (FCC) has developed Maximum Permissible Exposure (MPE) Limits for general public exposures and occupational exposures. This report summarizes the results of RF-EME modeling in relation to relevant FCC RF-EME compliance standards for limiting human exposure to RF-EME fields.

This report contains the RF EME analysis for the site, including the following:

- Site Plan with antenna locations
- Graphical representation of theoretical MPE fields based on modeling
- Graphical representation of recommended signage and/or barriers

This document addresses the compliance of AT&T's transmitting facilities independently and in relation to all collocated facilities at the site.

#### **Statement of Compliance**

A site is considered out of compliance with FCC regulations if there are areas that exceed the FCC exposure limits <u>and</u> there are no RF hazard mitigation measures in place. Any carrier which has an installation that contributes more than 5% of the applicable MPE must participate in mitigating these RF hazards.

As presented in the sections below, based on worst-case predictive modeling, there are no modeled exposures on any accessible utility line level and ground walking/working surface related to ATT's proposed antennas that exceed the FCC's occupational and/or general public exposure limits at this site.

As such, the proposed AT&T installation is in compliance with FCC regulations upon proper installation of recommended signage and/or barriers.

#### AT&T Recommended Signage/Compliance Plan

AT&T's RF Exposure: Responsibilities, Procedures & Guidelines document, dated October 28, 2014, requires that:

- 1. All sites must be analyzed for RF exposure compliance;
- 2. All sites must have that analysis documented; and
- 3. All sites must have any necessary signage and barriers installed.

Site compliance recommendations have been developed based upon protocols presented in AT&T's RF Exposure: Responsibilities, Procedures & Guidelines document, dated October 28, 2014, additional guidance provided by AT&T, EBI's understanding of FCC and OSHA requirements, and common industry practice. Barrier locations have been identified (when required) based on guidance presented in AT&T's RF Exposure: Responsibilities, Procedures & Guidelines document, dated October 28, 2014.

RF-EME Compliance Report EBI Project No. 6222000610

The following signage is recommended at this site:

Install 7 by 7-inch CAUTION signs on the equipment cabinet on the side of the utility pole.

The signage proposed for installation at this site complies with AT&T's RF Exposure: Responsibilities, Procedures & Guidelines document and therefore complies with FCC and OSHA requirements. Barriers are not recommended on this site. To reduce the risk of exposure and/or injury, EBI recommends that access to the utility pole or areas associated with the active antenna installation be restricted and secured where possible. More detailed information concerning site compliance recommendations is presented in Section 4.0 and Appendix B of this report.

#### 1.0 FEDERAL COMMUNICATIONS COMMISSION (FCC) REQUIREMENTS

The FCC has established Maximum Permissible Exposure (MPE) limits for human exposure to Radiofrequency Electromagnetic (RF-EME) energy fields, based on exposure limits recommended by the National Council on Radiation Protection and Measurements (NCRP) and, over a wide range of frequencies, the exposure limits developed by the Institute of Electrical and Electronics Engineers, Inc. (IEEE) and adopted by the American National Standards Institute (ANSI) to replace the 1982 ANSI guidelines. Limits for localized absorption are based on recommendations of both ANSI/IEEE and NCRP.

The FCC guidelines incorporate two separate tiers of exposure limits that are based upon occupational/controlled exposure limits (for workers) and general public/uncontrolled exposure limits for members of the general public.

**Occupational/controlled exposure limits** apply to situations in which persons are exposed as a consequence of their employment and in which those persons who are exposed have been made fully aware of the potential for exposure and can exercise control over their exposure. Occupational/controlled exposure limits also apply where exposure is of a transient nature as a result of incidental passage through a location where exposure levels may be above general public/uncontrolled limits (see below), as long as the exposed person has been made fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**General public/uncontrolled exposure limits** apply to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Therefore, members of the general public would always be considered under this category when exposure is not employment-related, for example, in the case of a telecommunications tower that exposes persons in a nearby residential area.

Table I and Figure I (below), which are included within the FCC's OET Bulletin 65, summarize the MPE limits for RF emissions. These limits are designed to provide a substantial margin of safety. They vary by frequency to take into account the different types of equipment that may be in operation at a particular facility and are "time-averaged" limits to reflect different durations resulting from controlled and uncontrolled exposures.

The FCC's MPEs are measured in terms of power (mW) over a unit surface area (cm²). Known as the power density, the FCC has established an occupational MPE of 5 milliwatts per square centimeter (mW/cm²) and an uncontrolled MPE of 1 mW/cm² for equipment operating in the 1900 MHz frequency range. For the AT&T equipment operating at 850 MHz, the FCC's occupational MPE is 2.83 mW/cm² and an uncontrolled MPE of 0.57 mW/cm². For the AT&T equipment operating at 700 MHz, the FCC's occupational MPE is 2.33 mW/cm² and an uncontrolled MPE of 0.47 mW/cm². These limits are considered protective of these populations.


T	able I: Limits for I	Maximum Permiss	sible Exposure (MP	E)
(A) Limits for Occu	upational/Controlled	l Exposure		
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm²)	Averaging Time [E] <sup>2</sup> , [H] <sup>2</sup> , or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f <sup>2</sup> )*	6
30-300	61.4	0.163	1.0	6
300-I,500	-		f/300	6
1,500-100,000			5	6

(B) Limits for General Public/Uncontrolled Exposure					
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm²)	Averaging Time [E] <sup>2</sup> , [H] <sup>2</sup> , or S (minutes)	
0.3-1.34	614	1.63	(100)*	30	
1.34-30	824/f	2.19/f	(180/f <sup>2</sup> )*	30	
30-300	27.5	0.073	0.2	30	
300-I,500			f/1,500	30	
1,500-100,000			1.0	30	

f = Frequency in (MHz)

<u>Figure 1.</u> FCC Limits for Maximum Permissible Exposure (MPE)

Plane-wave Equivalent Power Density

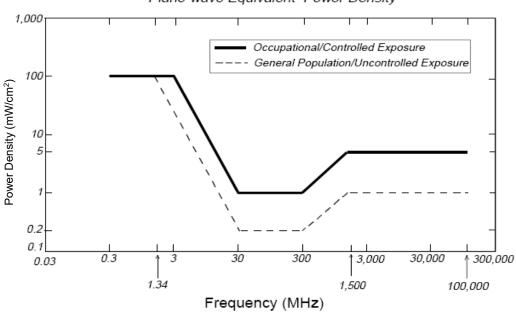

Based on the above, the most restrictive thresholds for exposures of unlimited duration to RF energy for several personal wireless services are summarized below:

Personal Wireless Service	Approximate Frequency	Occupational MPE	Public MPE	
Microwave (Point-to-Point)	5,000 - 80,000 MHz	5.00 mW/cm <sup>2</sup>	1.00 mW/cm <sup>2</sup>	
Broadband Radio (BRS)	2,600 MHz	5.00 mW/cm <sup>2</sup>	1.00 mW/cm <sup>2</sup>	
Wireless Communication (WCS)	2,300 MHz	5.00 mW/cm <sup>2</sup>	1.00 mW/cm <sup>2</sup>	
Advanced Wireless (AWS)	2,100 MHz	5.00 mW/cm <sup>2</sup>	I.00 mW/cm <sup>2</sup>	
Personal Communication (PCS)	1,950 MHz	5.00 mW/cm <sup>2</sup>	I.00 mW/cm <sup>2</sup>	
Cellular Telephone	870 MHz	2.90 mW/cm <sup>2</sup>	0.58 mW/cm <sup>2</sup>	
Specialized Mobile Radio (SMR)	855 MHz	2.85 mW/cm <sup>2</sup>	0.57 mW/cm <sup>2</sup>	
Long Term Evolution (LTE)	700 MHz	2.33 mW/cm <sup>2</sup>	0.47 mW/cm <sup>2</sup>	
Most Restrictive Frequency Range	30-300 MHz	I.00 mW/cm <sup>2</sup>	0.20 mW/cm <sup>2</sup>	

MPE limits are designed to provide a substantial margin of safety. These limits apply for continuous exposures and are intended to provide a prudent margin of safety for all persons, regardless of age, gender, size, or health.

<sup>\*</sup> Plane-wave equivalent power density

Personal Communication (PCS) facilities used by AT&T in this area operate within a frequency range of 700-1900 MHz. Facilities typically consist of: I) electronic transceivers (the radios or cabinets) connected to wired telephone lines; and 2) antennas that send the wireless signals created by the transceivers to be received by individual subscriber units (PCS telephones). Transceivers are typically connected to antennas by coaxial cables.

Because of the short wavelength of PCS services, the antennas require line-of-site paths for good propagation, and are typically installed above ground level. Antennas are constructed to concentrate energy towards the horizon, with as little energy as possible scattered towards the ground or the sky. This design, combined with the low power of PCS facilities, generally results in no possibility for exposure to approach Maximum Permissible Exposure (MPE) levels, with the exception of areas directly in front of the antennas.

#### 2.0 AT&T RF EXPOSURE POLICY REQUIREMENTS

AT&T's RF Exposure: Responsibilities, Procedures & Guidelines document, dated October 28, 2014, requires that:

- 1. All sites must be analyzed for RF exposure compliance;
- 2. All sites must have that analysis documented; and
- 3. All sites must have any necessary signage and barriers installed.

Pursuant to this guidance, worst-case predictive modeling was performed for the site. This modeling is described below in Section 3.0. Lastly, based on the modeling and survey data, EBI has produced a Compliance Plan for this site that outlines the recommended signage and barriers. The recommended Compliance Plan for this site is described in Section 4.0.

#### 3.0 Worst-Case Predictive Modeling

In accordance with AT&T's RF Exposure policy, EBI performed theoretical modeling using RoofMaster™ software to estimate the worst-case power density at the site utility line level and ground-level and/or nearby rooftops resulting from operation of the antennas. RoofMaster™ is a widely-used predictive modeling program that has been developed to predict RF power density values for rooftop and tower telecommunications sites produced by vertical collinear antennas that are typically used in the cellular, PCS, paging and other communications services. Using the computational methods set forth in Federal Communications (FCC) Office of Engineering & Technology (OET) Bulletin 65, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields" (OET-65), RoofMaster™ calculates predicted power density in a scalable grid based on the contributions of all RF sources characterized in the study scenario. At each grid location, the cumulative power density is expressed as a percentage of the FCC limits. Manufacturer antenna pattern data is utilized in these calculations. RoofMaster™ models consist of the Far Field model as specified in OET-65 and an implementation of the OET-65 Cylindrical Model (Sula9). The models utilize several operational specifications for different types of antennas to produce a plot of spatially-averaged power densities that can be expressed as a percentage of the applicable exposure limit. A statistical power factor may be applied to the antenna system based on guidance from the carrier and system manufacturers.

For this report, EBI utilized antenna and power data provided by AT&T and compared the resultant worst-case MPE levels to the FCC's occupational/controlled exposure limits outlined in OET Bulletin 65.

The assumptions used in the modeling are based upon information provided by AT&T and information gathered from other sources. There are no other wireless carriers with equipment installed at this site.

RF-EME Compliance Report EBI Project No. 6222000610

Based on worst-case predictive modeling, there are no modeled exposures on any accessible utility line level and ground walking/working surface related to ATT's proposed antennas that exceed the FCC's occupational and/or general public exposure limits at this site.

Modeling indicates that the worst-case emitted power density may exceed the FCC's general public limit within approximately 25 feet of the antenna face and the occupational limit within approximately 11 feet of the antenna face. Modeling also indicates that the worst-case emitted power density may exceed the FCC's general population limit within approximately 7 feet below the bottom of the AT&T antenna.

At the nearest walking/working surfaces to the AT&T antennas on the utility line level, the maximum power density generated by the AT&T antennas is approximately 24.40 percent of the FCC's general public limit (4.88 percent of the FCC's occupational limit). The composite exposure level from all carriers on this site is approximately 24.40 percent of the FCC's general public limit (4.88 percent of the FCC's occupational limit) at the nearest walking/working surface to each antenna. It should be noted that percentage of MPE is based on spatially-averaged power densities over a height of six feet, with the height of the utility line being centered within that spatial range. Based on worst-case predictive modeling, there are no areas at ground/street level related to the proposed AT&T antennas that exceed the FCC's occupational or general public exposure limits at this site. At ground/street level, the maximum power density generated by the antennas is approximately 1.18 percent of the FCC's general public limit (0.236 percent of the FCC's occupational limit).

A graphical representation of the RoofMaster™ modeling results is presented in Appendix B.


Microwave dish antennas are designed for point-to-point operations at the elevations of the installed equipment rather than ground-level coverage. Based on AT&T's RF Exposure: Responsibilities, Procedures & Guidelines document, dated October 28, 2014, microwave antennas are considered compliant if they are higher than 20 feet above any accessible walking/working surface. There are no microwaves installed at this site.

#### 4.0 RECOMMENDED SIGNAGE/COMPLIANCE PLAN

Signs are the primary means for control of access to areas where RF exposure levels may potentially exceed the MPE. As presented in the AT&T guidance document, the signs must:

- Be posted at a conspicuous point;
- Be posted at the appropriate locations;
- Be readily visible; and
- Make the reader aware of the potential risks prior to entering the affected area.

The table below presents the signs that may be used for AT&T installations.

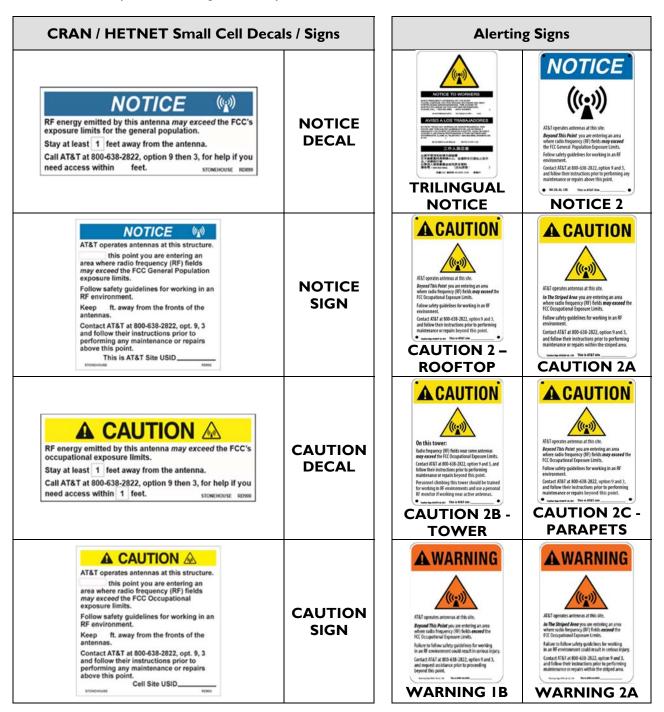

Based upon protocols presented in AT&T's RF Exposure: Responsibilities, Procedures & Guidelines document, dated October 28, 2014, and additional guidance provided by AT&T, the following signage is recommended on the site:

Install 7 by 7-inch CAUTION signs on the equipment cabinet on the side of the utility pole.

No barriers are required for this site. Barriers should be constructed of weather-resistant plastic or wood fencing. Barriers may consist of railing, rope, chain, or weather-resistant plastic if no other types are permitted or are feasible. Painted stripes should only be used as a last resort and only in regions where there is little chance of snowfall. If painted stripes are selected as barriers, it is recommended that the stripes and signage be illuminated. The signage and any barriers are graphically represented in the Signage Plan presented in Appendix B.

#### 5.0 SUMMARY AND CONCLUSIONS

EBI has prepared this Radiofrequency Emissions Compliance Report for the proposed AT&T telecommunications equipment at the site located at 97 Hamilton Avenue in Stamford, Connecticut.

EBI has conducted theoretical modeling to estimate the worst-case power density from AT&T antennas to document potential MPE levels at this location and ensure that site control measures are adequate to meet FCC and OSHA requirements, as well as AT&T's corporate RF safety policies. As presented in the preceding sections, based on worst-case predictive modeling, there are no modeled exposures on any accessible utility line level and ground walking/working surface related to ATT's proposed antennas that exceed the FCC's occupational and/or general public exposure limits at this site.

To reduce the risk of exposure and/or injury, EBI recommends that access to the utility pole or areas associated with the active antenna installation be restricted and secured where possible. Signage is recommended at the site as presented in Section 4.0 and Appendix B. Posting of the signage brings the site into compliance with FCC rules and regulations and AT&T's corporate RF safety policies.

#### 6.0 LIMITATIONS

This report was prepared for the use of AT&T Mobility, LLC to meet requirements outlined in AT&T's corporate RF safety guidelines. It was performed in accordance with generally accepted practices of other consultants undertaking similar studies at the same time and in the same locale under like circumstances. The conclusions provided by EBI and its partners are based solely on information supplied by AT&T. The observations in this report are valid on the date of the investigation. Any additional information that becomes available concerning the site should be provided to EBI so that our conclusions may be revised and modified, if necessary. This report has been prepared in accordance with Standard Conditions for Engagement and authorized proposal, both of which are integral parts of this report. No other warranty, expressed or implied, is made.

## Appendix A Personnel Certifications

## Preparer Certification

#### I, Andrew Simpson, state that:


- I am an employee of EnviroBusiness Inc. (d/b/a EBI Consulting), which provides RF-EME safety and compliance services to the wireless communications industry.
- I have successfully completed RF-EME safety training, and I am aware of the potential hazards from RF-EME and would be classified "occupational" under the FCC regulations.
- I am fully aware of and familiar with the Rules and Regulations of both the Federal Communications Commissions (FCC) and the Occupational Safety and Health Administration (OSHA) with regard to Human Exposure to Radio Frequency Radiation.
- I have been trained in on the procedures outlined in AT&T's RF Exposure: Responsibilities, Procedures & Guidelines document (dated October 28, 2014) and on RF-EME modeling using RoofMaster™ modeling software.
- I have reviewed the data provided by the client and incorporated it into this Site Compliance Report such that the information contained in this report is true and accurate to the best of my knowledge.

andrew Simpson

# Appendix B Compliance/Signage Plan

Proposed Sign

Installed Sign

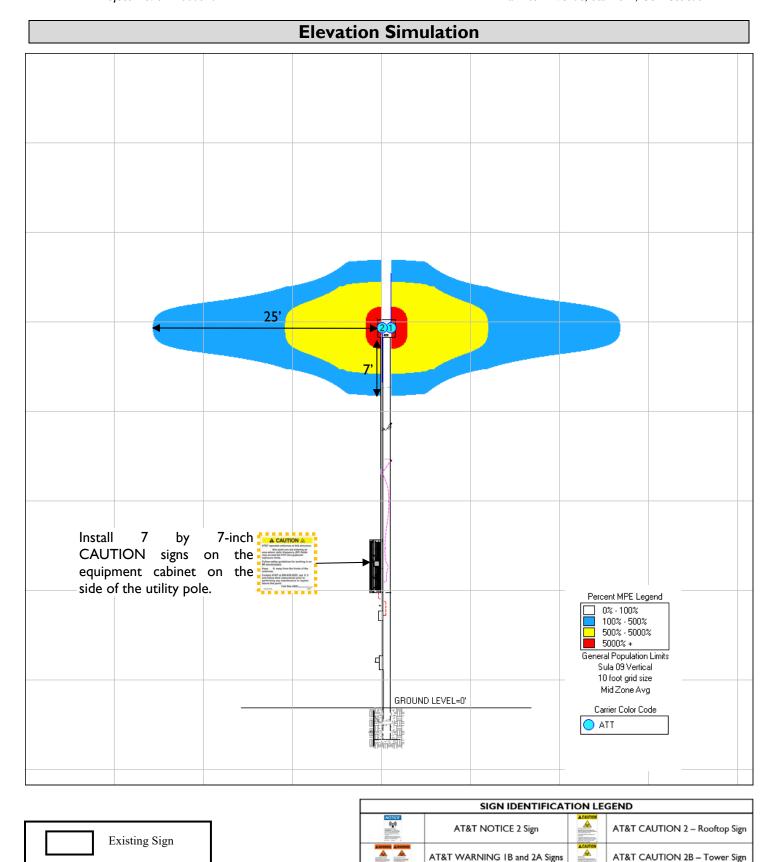

AT&T NOTICE Small Cell Signs

AT&T CAUTION Small Cell Signs

AT&T CAUTION 2C - Parapet Sign

AT&T TRILINGUAL NOTICE Sign

## ATTACHMENT 6

#### **CERTIFICATION OF SERVICE**

I hereby certify that on March 8, 2022 a copy of the following notice of the intended filing of a Petition with the Connecticut Siting Council for a declaratory ruling was sent by certified mail, return receipt requested, to the list below:

Dated: March 8, 2022

Cuddy & Feder LLP 45 Hamilton Avenue, 14<sup>th</sup> Floor White Plains, New York 10601

Attorneys for:

New Cingular Wireless PCS, LLC (AT&T)

#### **State**

State				
THE HONORABLE WILLIAM TONG	DEPARTMENT OF ECONOMIC AND			
ATTORNEY GENERAL	COMMUNITY DEVELOPMENT			
OFFICE OF THE ATTORNEY GENERAL	DAVID LEHMAN, COMMISSIONER			
165 CAPITOL AVENUE	450 COLUMBUS BLVD			
HARTFORD, CT 06106	HARTFORD, CT 06103			
DEPARTMENT OF PUBLIC HEALTH	PUBLIC UTILITIES REGULATORY			
DR. MANISHA JUTHANI, MD,	AUTHORITY			
ACTING COMMISSIONER	MARISSA P. GILLETT, CHAIRMAN			
410 CAPITOL AVENUE	10 FRANKLIN SQUARE			
HARTFORD, CT 06134	NEW BRITAIN, CT 06051			
COUNCIL ON ENVIRONMENTAL QUALITY	DEPARTMENT OF TRANSPORTATION			
PETER B. HEARN, EXECUTIVE DIRECTOR	JOSEPH GIULIETTI, COMMISSIONER			
79 ELM STREET, 6 <sup>th</sup> FLOOR	2800 BERLIN TURNPIKE, P.O. BOX 317546			
HARTFORD, CT 06106	NEWINGTON, CT 06131			
DEPARTMENT OF ENERGY &	DEPARTMENT OF AGRICULTURE			
ENVIRONMENTAL PROTECTION	BRYAN P. HURLBURT, COMMISSIONER			
KATIE DYKES, COMMISSIONER	450 COLUMBUS BOULEVARD			
79 ELM STREET	SUITE 701			
HARTFORD, CT 06106	HARTFORD, CT 06103			
OFFICE OF POLICY AND MANAGEMENT	SECRETARY OF THE STATE			
MELISSA MCCAW, SECRETARY	DENISE W. MERRILL			
450 CAPITOL AVENUE	165 CAPITOL AVENUE, SUITE 1000			
HARTFORD, CT 06106	P.O. BOX 150470			
	HARTFORD, CT 06106			
WESTERN CONNECTICUT COUNCIL OF	DEPARTMENT OF EMERGENCY SERVICES			
GOVERNMENTS	& PUBLIC PROTECTION			
1 RIVERSIDE ROAD	DIVISION OF EMERGENCY			
SANDY HOOK, CT 06482	MANAGEMENT AND HOMELAND			
	SECURITY			

STATE HISTORIC PRESERVATION OFFICE DEPARTMENT OF ECONOMIC AND COMMUNITY DEVELOPMENT 450 COLUMBUS BLVD., 5 <sup>TH</sup> FLOOR HARTFORD, CT 06103	JAMES C. ROVELLA, COMMISSIONER 1111 COUNTRY CLUB ROAD MIDDLETOWN, CT 06457 STATE REPRESENTATIVE- 146 <sup>TH</sup> DISTRICT DAVID MICHEL LEGISLATIVE OFFICE BUILDING 300 CAPITOL AVENUE ROOM 4037 HARTFORD, CT 06106
STATE SENATOR – 27 <sup>TH</sup> DISTRICT	STATE SENATOR – 36 <sup>TH</sup> DISTRICT
PATRICIA BILLIE MILLER	RYAN FAZIO
LEGISLATIVE OFFICE BUILDING	LEGISLATIVE OFFICE BUILDING
300 CAPITOL AVENUE	300 CAPITOL AVENUE
ROOM 3300	ROOM 3400
HARTFORD, CT 06106	HARTFORD, CT 06106

### Federal

FEDERAL COMMUNICATIONS	FEDERAL AVIATION ADMINISTRATION
COMMISSION	800 INDEPENDENCE AVENUE, SW
45 L STREET NE	WASHINGTON, DC 20591
WASHINGTON, DC 20554	
U.S. SENATOR CHRIS MURPHY	U.S. SENATOR RICHARD BLUMENTHAL
COLT GATEWAY	90 STATE HOUSE SQUARE, 10TH FLOOR
120 HUYSHOPE AVENUE	HARTFORD, CT 06103
SUITE 401	
HARTFORD, CT 06106	
U.S. CONGRESSMAN – 4 <sup>TH</sup> DISTRICT	
JIM HIMES	
888 WASHINGTON BOULEVARD	
10 <sup>TH</sup> FLOOR	
STAMFORD, CT 06901	

## **City of Stamford**

CAROLINE SIMMONS, MAYOR	THERESA DELL		
OFFICE OF THE MAYOR	CHAIR OF PLANNING BOARD		
STAMFORD GOVERNMENT CENTER	PLANNING BOARD		
888 WASHINGTON BOULEVARD	STAMFORD GOVERNMENT CENTER		
10 <sup>TH</sup> FLOOR	888 WASHINGTON BOULEVARD		
STAMFORD, CT 06901	7 <sup>TH</sup> FLOOR		
	STAMFORD, CT 06901		
GARY STONE, CHAIRMAN OF	LYDA RUIJTER, CITY & TOWN CLERK		
ENVIRONMENTAL PROTECTION BOARD	TOWN CLERK'S OFFICE		
STAMFORD GOVERNMENT CENTER	STAMFORD GOVERNMENT CENTER		
888 WASHINGTON BOULEVARD	888 WASHINGTON BOULEVARD		
7 <sup>TH</sup> FLOOR	GROUND FLOOR		
STAMFORD, CT 06901	STAMFORD, CT 06901		

DAVID STEIN	
CHAIR OF ZONING BOARD	
ZONING BOARD	
STAMFORD GOVERNMENT CENTER	
888 WASHINGTON BOULEVARD	
$7^{\mathrm{TH}}$ FLOOR	
STAMFORD, CT 06901	

#### **NOTICE**

Notice is hereby given, pursuant to Section 16-50j-40(a) of the Regulations of Connecticut State Agencies of a Petition being filed with the Connecticut Siting Council ("Siting Council") on or after March 10, 2022 by New Cingular Wireless PCS, LLC ("AT&T"). AT&T seeks a declaratory ruling that no Certificate of Environmental Compatibility and Public Need ("Certificate") is required under Section 16-50k(a) of the Connecticut General Statutes ("C.G.S.") to install a new "small cell" wireless telecommunications facility on a new pole within the public right-of-way.

The proposed telecommunications facility will be in the public right-of-way located adjacent to 97 Hamilton Avenue, Stamford, Connecticut. AT&T proposes to install an approximately 50'-tall Class 2 utility pole. The proposed pole will stand approximately 43'0"-tall above grade level ("AGL"). AT&T proposes to mount two small cell antennas to the top of the new utility pole at a centerline height of 42'0"AGL with a total height of 43'0" AGL to the top of the antennas and mount. A new equipment cabinet is proposed on the side of the pole.

The Petition will provide additional details of the proposal and explain why AT&T submits that this proposed small cell facility presents no significant adverse environmental effects. The location, height, and other features of the proposal are subject to review and potential change under the provisions of Connecticut General Statutes Sections 16-50g *et. seq.* 

Copies of the Petition will be on file with the following on or after March 10, 2022:

Connecticut Siting Council City and Town Clerk

10 Franklin Square 888 Washington Boulevard – Ground Floor

New Britain, Connecticut 06051 Stamford, CT 06901

or the offices of the undersigned. A copy of the Petition will also be available on the Connecticut Siting Council website: <a href="https://www.ct.gov/cSc/site/default.asp">https://www.ct.gov/cSc/site/default.asp</a> under Pending Matters. All inquiries should be addressed to the Connecticut Siting Council or to the undersigned.

Lucia Chiocchio, Esq. Daniel Patrick, Esq. Cuddy & Feder LLP 445 Hamilton Ave, 14th Floor White Plains, New York 10601 (914) 761-1300 Attorneys for the Petitioner

#### **CERTIFICATION OF SERVICE**

I hereby certify that on March 8, 2022 a copy of the following letter and notice of the intended filing of a Petition with the Connecticut Siting Council for a declaratory ruling was sent by certified mail, return receipt requested, to the attached list of abutting property owners:

Dated: March 8, 2022

Cuddy & Feder LLP

45 Hamilton Avenue, 14<sup>th</sup> Floor White Plains, New York 10601

Attorneys for:

New Cingular Wireless PCS, LLC (AT&T)

STATE OF CONNECTICUT	WWE REAL ESTATE HOLDINGS LLC		
P.O. BOX 317546	88 HAMILTON AVENUE		
NEWINGTON, CT 06131	STAMFORD, CT 06902		
WWE REAL ESTATE HOLDINGS LLC	CONNECTICUT LIGHT & POWER CO.		
1241 EAST MAIN STREET	o HAMILTON AVENUE		
STAMFORD, CT 06902	STAMFORD, CT 06902		
CONNECTICUT LIGHT & POWER CO.	CONNECTICUT LIGHT & POWER CO.		
P.O. BOX 270	o LINCOLN AVENUE		
HARTFORD, CT 06141	STAMFORD, CT 06902		

March 8, 2022

### VIA CERTIFIED MAIL/ RETURN RECEIPT REQUESTED

Re: New Cingular Wireless PCS, LLC ("AT&T")

Installation of A Small Cell Wireless Telecommunication Facility

97 Hamilton Avenue, Stamford, Connecticut

Dear Sir or Madam:

We are writing to you on behalf of our client New Cingular Wireless PCS, LLC ("AT&T") with respect to the above referenced matter and our client's intent to file a petition for a declaratory ruling with the State of Connecticut Siting Council for approval of installation of a small cell wireless telecommunication facility on a new pole (the "Facility") to be installed in the public right-of-way near the above-captioned property.

State law requires that record owners of property abutting a parcel on which a facility is proposed be sent notice of an applicant's intent to file a petition with the Siting Council.

Included with this letter please find a Notice of this submission and details of the proposal. The location, height and other features of the Facility are subject to review and potential change by the Connecticut Siting Council under the provisions of Connecticut General Statutes §16-50g *et seq*.

If you have any questions concerning this petition, please contact the Connecticut Siting Council or the undersigned after March 10, 2022 which is the date that the petition is expected to be on file.

Very truly yours,

Lucia Chiocchio Enclosure

cc: Daniel Patrick, Esq., Cuddy & Feder LLP

#### NOTICE

Notice is hereby given, pursuant to Section 16-50j-40(a) of the Regulations of Connecticut State Agencies of a Petition being filed with the Connecticut Siting Council ("Siting Council") on or after March 10, 2022 by New Cingular Wireless PCS, LLC ("AT&T"). AT&T seeks a declaratory ruling that no Certificate of Environmental Compatibility and Public Need ("Certificate") is required under Section 16-50k(a) of the Connecticut General Statutes ("C.G.S.") to install a new "small cell" wireless telecommunications facility on a new pole within the public right-of-way.

The proposed telecommunications facility will be in the public right-of-way located adjacent to 97 Hamilton Avenue, Stamford, Connecticut. AT&T proposes to install an approximately 50'-tall Class 2 utility pole. The proposed pole will stand approximately 43'0"-tall above grade level ("AGL"). AT&T proposes to mount two small cell antennas to the top of the new utility pole at a centerline height of 42'0"AGL with a total height of 43'0" AGL to the top of the antennas and mount. A new equipment cabinet is proposed on the side of the pole.

The Petition will provide additional details of the proposal and explain why AT&T submits that this proposed small cell facility presents no significant adverse environmental effects. The location, height, and other features of the proposal are subject to review and potential change under the provisions of Connecticut General Statutes Sections 16-50g *et. seq.* 

Copies of the Petition will be on file with the following on or after March 10, 2022:

Connecticut Siting Council City and Town Clerk

10 Franklin Square 888 Washington Boulevard – Ground Floor

New Britain, Connecticut 06051 Stamford, CT 06901

or the offices of the undersigned. A copy of the Petition will also be available on the Connecticut Siting Council website: <a href="https://www.ct.gov/cSc/site/default.asp">https://www.ct.gov/cSc/site/default.asp</a> under Pending Matters. All inquiries should be addressed to the Connecticut Siting Council or to the undersigned.

Lucia Chiocchio, Esq. Daniel Patrick, Esq. Cuddy & Feder LLP 445 Hamilton Ave, 14th Floor White Plains, New York 10601 (914) 761-1300 Attorneys for the Petitioner

## 97 Hamilton Avenue, Stamford, CT



#### **ABUTTERS LIST**

Parcel ID	Site Address	Owner Name	Mailing Address	City	State	Zip
	State of Connecticut	State of Connecticut	P.O. Box 317546	Newington	СТ	06131
004-3498	88 Hamilton Avenue, Stamford	WWE Real Estate Holdings, LLC	1241 East Main Street	Stamford	СТ	06902
000-9769	0 Hamilton Avenue, Stamford	Connecticut Light & Power Co.	P.O. Box 270	Hartford	СТ	06141
000-9772	0 Lincoln Avenue, Stamford	Connecticut Light & Power Co.	P.O. Box 270	Hartford	СТ	06141