XX - STRUCTURES - SPAN POLES INDEX OF DRAWINGS			
DRAWING NUMBER	DRAWING TITLE	DRAWING NUMBER	DRAWING TITLE
SP-1	INDEX OF DRAWINGS		
SP-2	STEEL SPAN POLE ELEVATION		
SP-3	STEEL SPAN POLE DETAILS		
SP-4	STEEL SPAN POLE FOUNDATION DETAILS		

## NOTE TO DESIGNERS:

- 1 DESIGNERS SHOULD PERFORM THE BELOW LISTED EDITS ON THE PDF FOR SUBMISSION.
  - DOUBLE CLICK ON TEXT "XX" TO EDIT SUBSET NUMBER IN THE INDEX OF DRAWING BLOCK.
  - DOUBLE CLICK ON TEXT "INSERT" AND "XXXX-XXXX" TO EDIT THE PROJECT SPECIFIC INFORMATION IN THE TITLE BLOCK. RIGHT CLICK ON THE TEXT AND "APPLY TO PAGES" TO COPY THE TITLE BLOCK INFORMATION TO ALL DRAWINGS.
- **2 -** DESIGNERS SHOULD ADD PAGE LABELS, SHEET NUMBERS, WATERMARKS AND DIGITAL SIGNATURE FIELD TO THE PDF AND FLATTEN THIS DOCUMENT IN ACCORDANCE WITH THE LATEST VERSION OF CTDOT DIGITAL PROJECT DEVELOPMENT MANUAL.
- **3 -** DELETE THIS TEXT BOX BEFORE SUBMITTING.


THE DESIGN APPEARS TO CONFORM TO APPLICABLE CRITERIA. APPROVAL IS NOT TO BE CONSTRUED TO MEAN THAT ALL ASPECTS OF THE DESIGN HAVE BEEN PERSONALLY CHECKED BY THE UNDERSIGNED. TRANSPORTATION PRINCIPAL ENGINEER

CHECKED BY: INSERT

CONNECTICUT DEPARTMENT OF TRANSPORTATION

DRAWING TITLE:

XXXX-XXXX

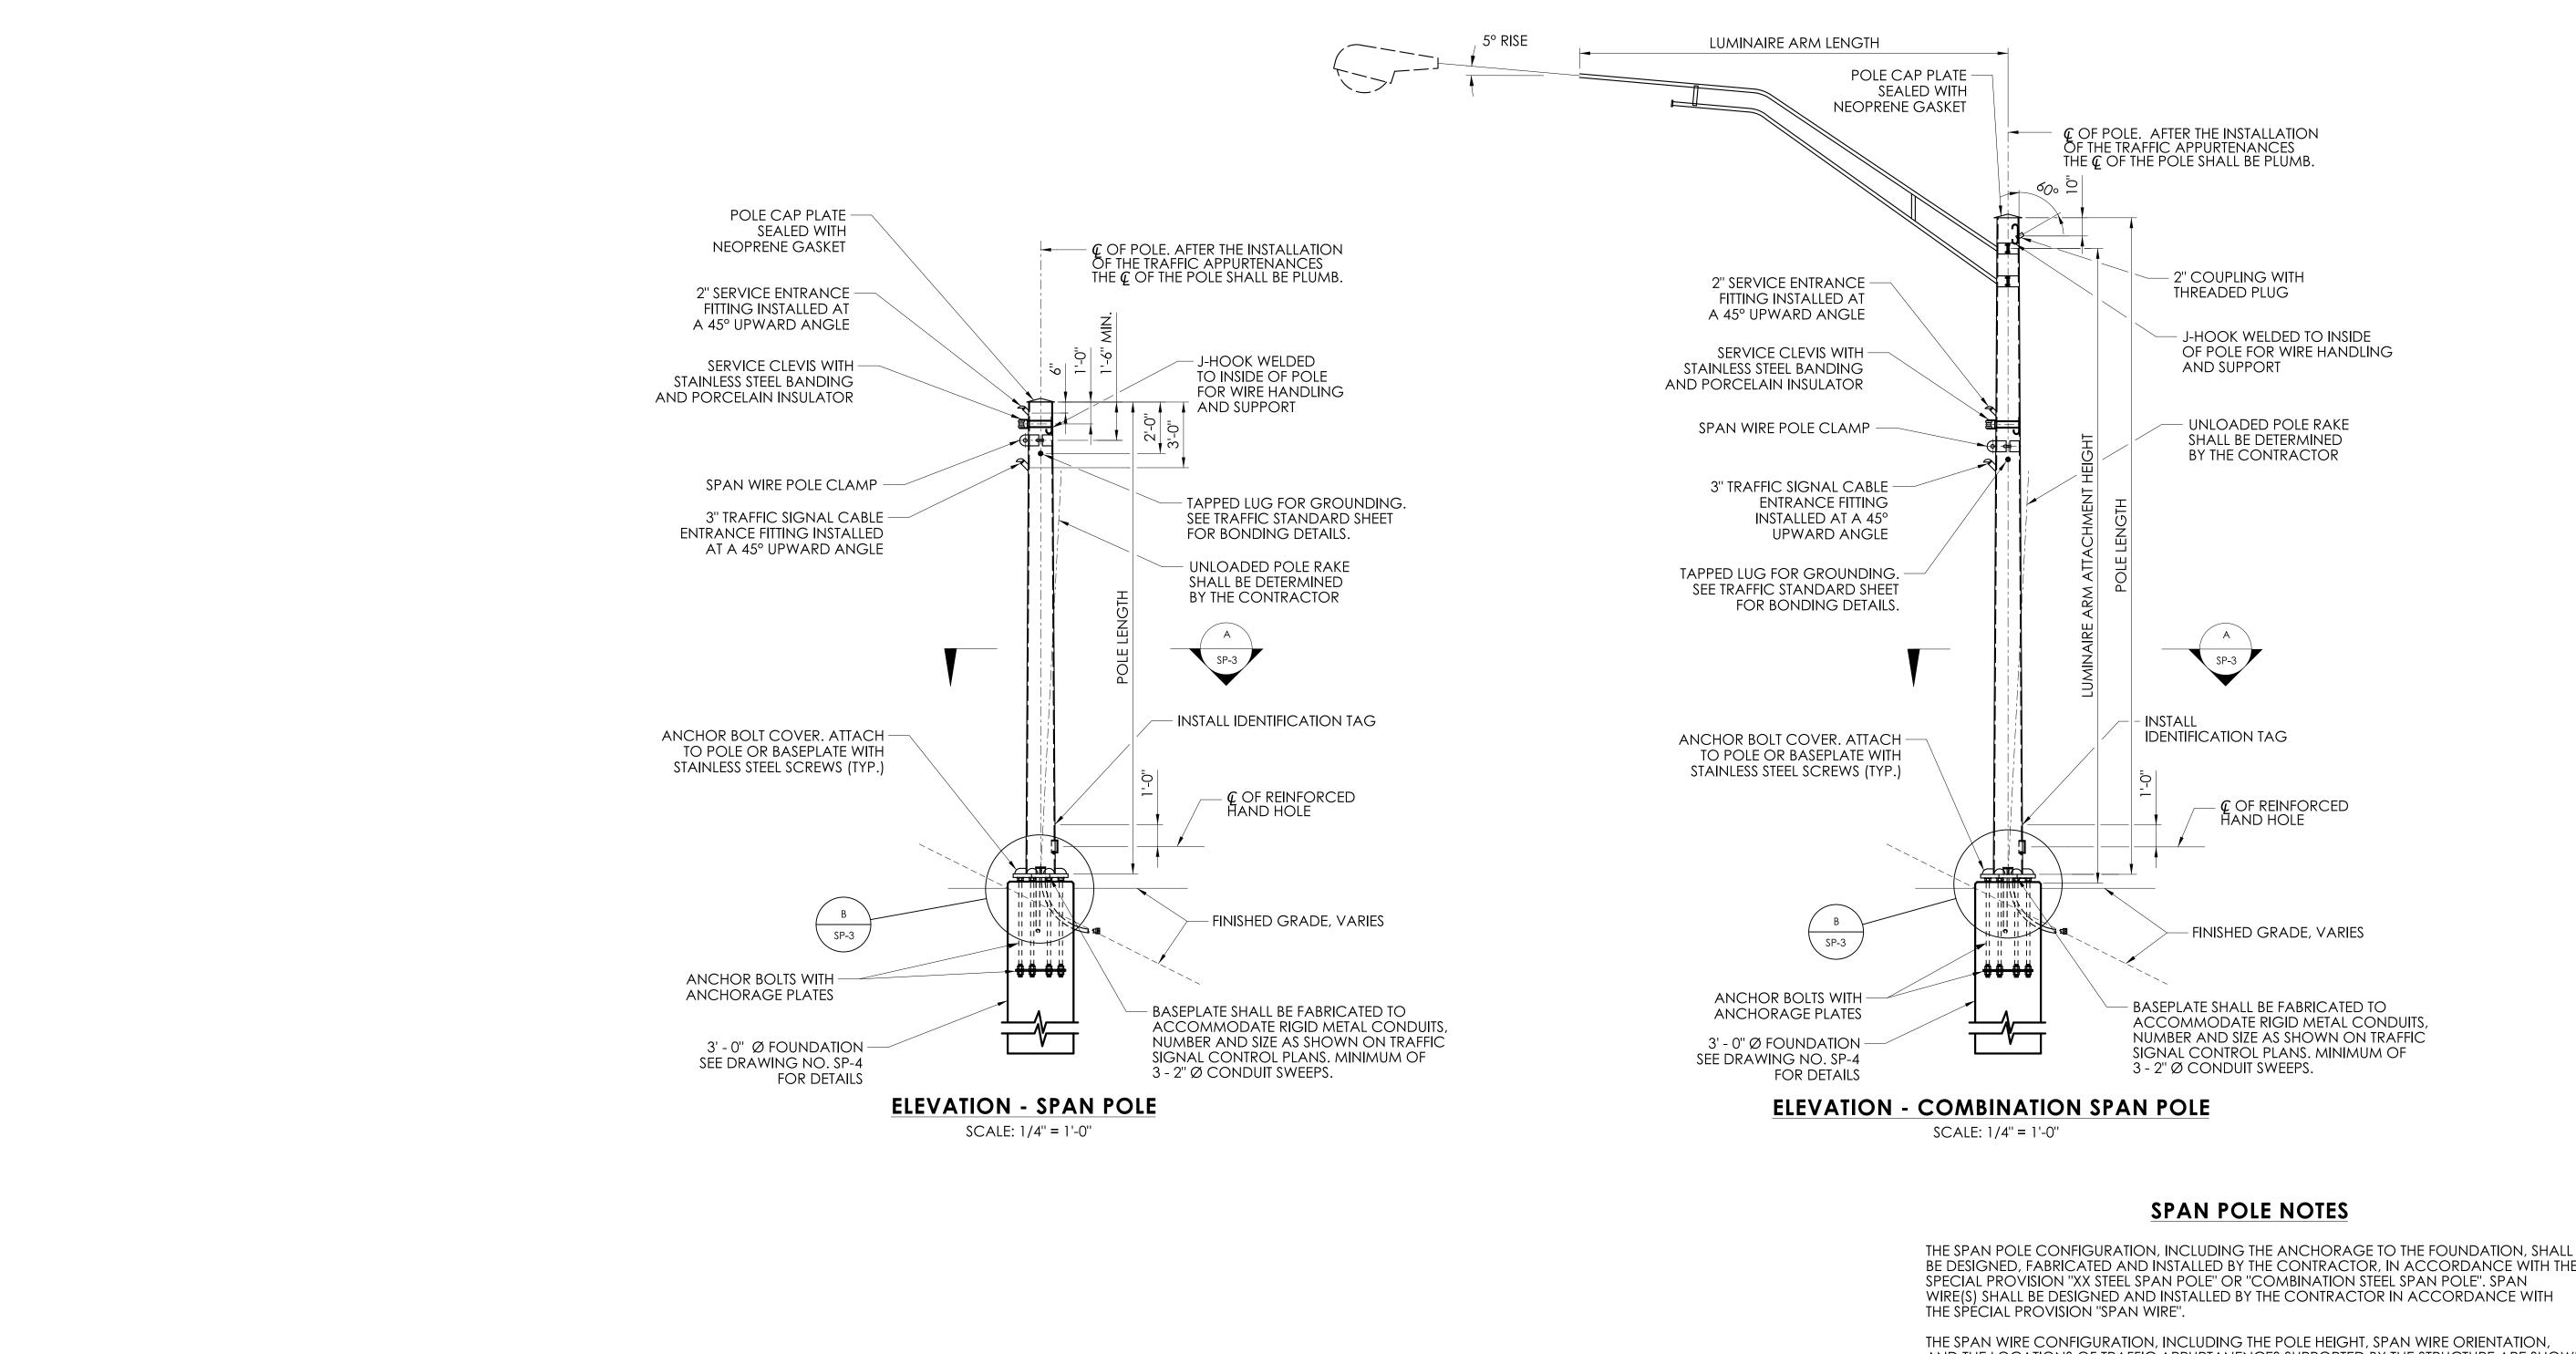


BE DESIGNED, FABRICATED AND INSTALLED BY THE CONTRACTOR, IN ACCORDANCE WITH THE SPECIAL PROVISION "XX STEEL SPAN POLE" OR "COMBINATION STEEL SPAN POLE". SPAN WIRE(S) SHALL BE DESIGNED AND INSTALLED BY THE CONTRACTOR IN ACCORDANCE WITH


AND THE LOCATIONS OF TRAFFIC APPURTANENCES SUPPORTED BY THE STRUCTURE ARE SHOWN ON THE TRAFFIC CONTROL SIGNAL PLAN. PRIOR TO DESIGN OF EACH SPAN POLE CONFIGURATION, THE CONTRACTOR SHALL PREPARE A LAYOUT DRAWING BASED ON A FIELD SURVEY AND THE CONTRACT DOCUMENTS TO VERIFY THE SPAN POLES AND SPAN WIRES WHEN INSTALLED WILL MEET THE GEOMETRIC AND CLEARANCE REQUIREMENTS IN THE CONTRACT DOCUMENTS. IF THE REQUIREMENTS CANNOT BE MET, THE CONTRACTOR SHALL NOTIFY THE ENGINEER.

THE SPAN POLE CONFIGURATION SHALL BE DESIGNED IN ACCORDANCE WITH THE LATEST EDITION OF THE AASHTO LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES AND TRAFFIC SIGNALS, INCLUDING THE LATEST INTERIM SPECIFICATIONS, AS AMENDED BY THE SPECIAL PROVISION "XX STEEL SPAN POLE" OR "COMBINATION STEEL SPAN


THE SPAN POLE CONFIGURATION SHALL BE DESIGNED TO SUPPORT TRAFFIC APPURTENANCES WITH PROPERTIES NO LESS THAN THOSE SHOWN ON THE TRAFFIC PLANS.


SIGNATURE BLOCK: PROJECT TITLE: DRAWING TITLE: PROJECT NO.: rown(s): DRAWING NO.: CONNECTICUT SP-2 STEEL SPAN POLE CTDOT **DEPARTMENT OF** SCALE AS NOTED SHEET NO.: **ELEVATION TRANSPORTATION** DESIGNER/DRAFTER: CHECKED BY: LASTED SAVED BY: FILE NAME: **PLOTTED DATE:** 9/17/2024

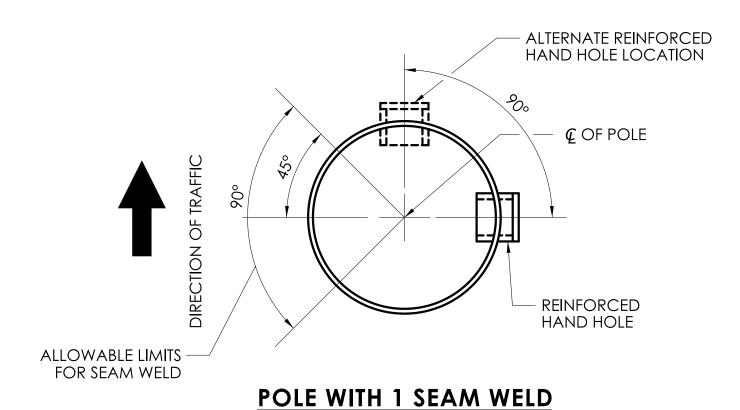


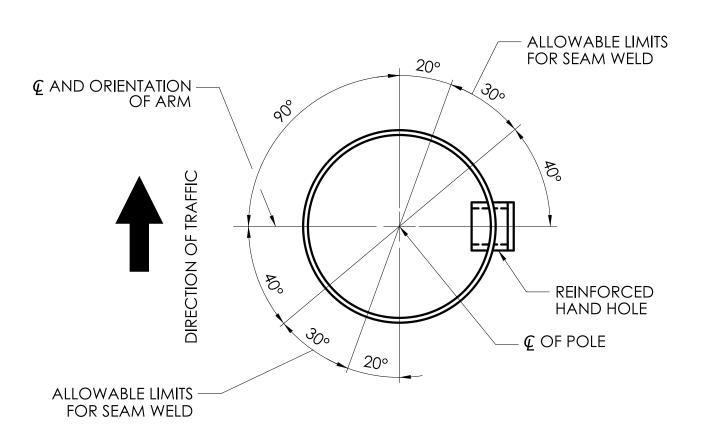



## **POLE WITH 2 SEAM WELDS**




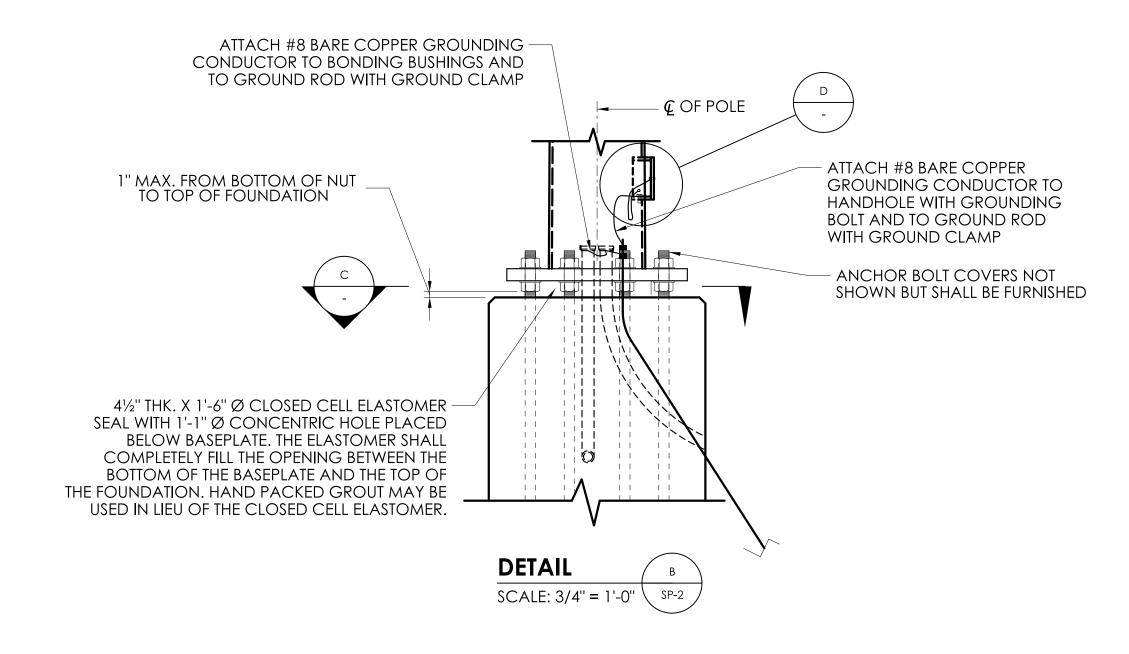


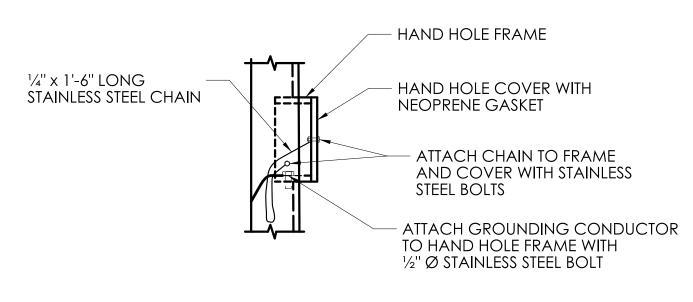



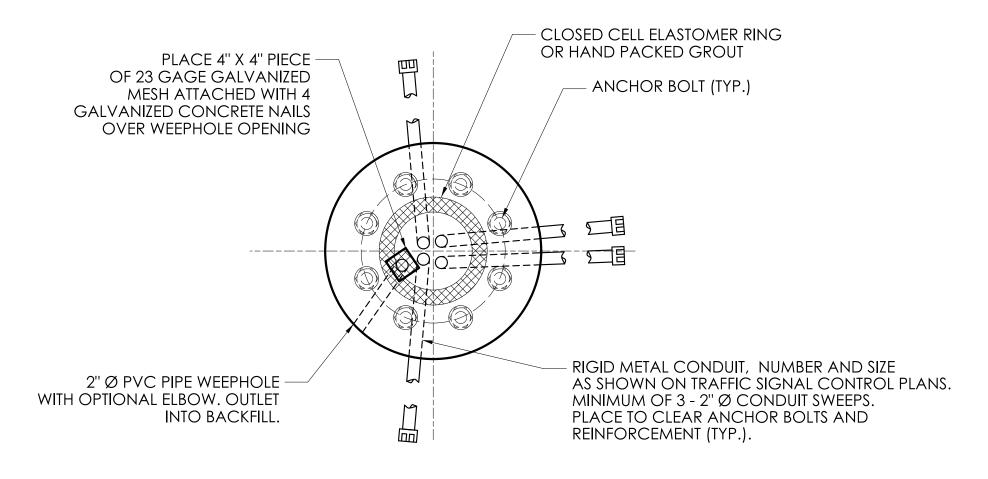



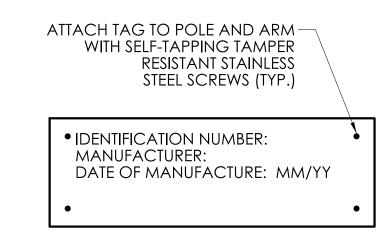

**IDENTIFICATION TAG - N.T.S.** 

STEEL SPAN POLE DETAILS

SIGNATURE BLOCK:

CTDOT

SCALE AS NOTED

CONNECTICUT DEPARTMENT OF TRANSPORTATION

PROJECT TITLE:

DRAWING TITLE:


TOWN(S):

PROJECT NO.:

SP-3 SHEET NO.:

DESIGNER/DRAFTER:

CHECKED BY:

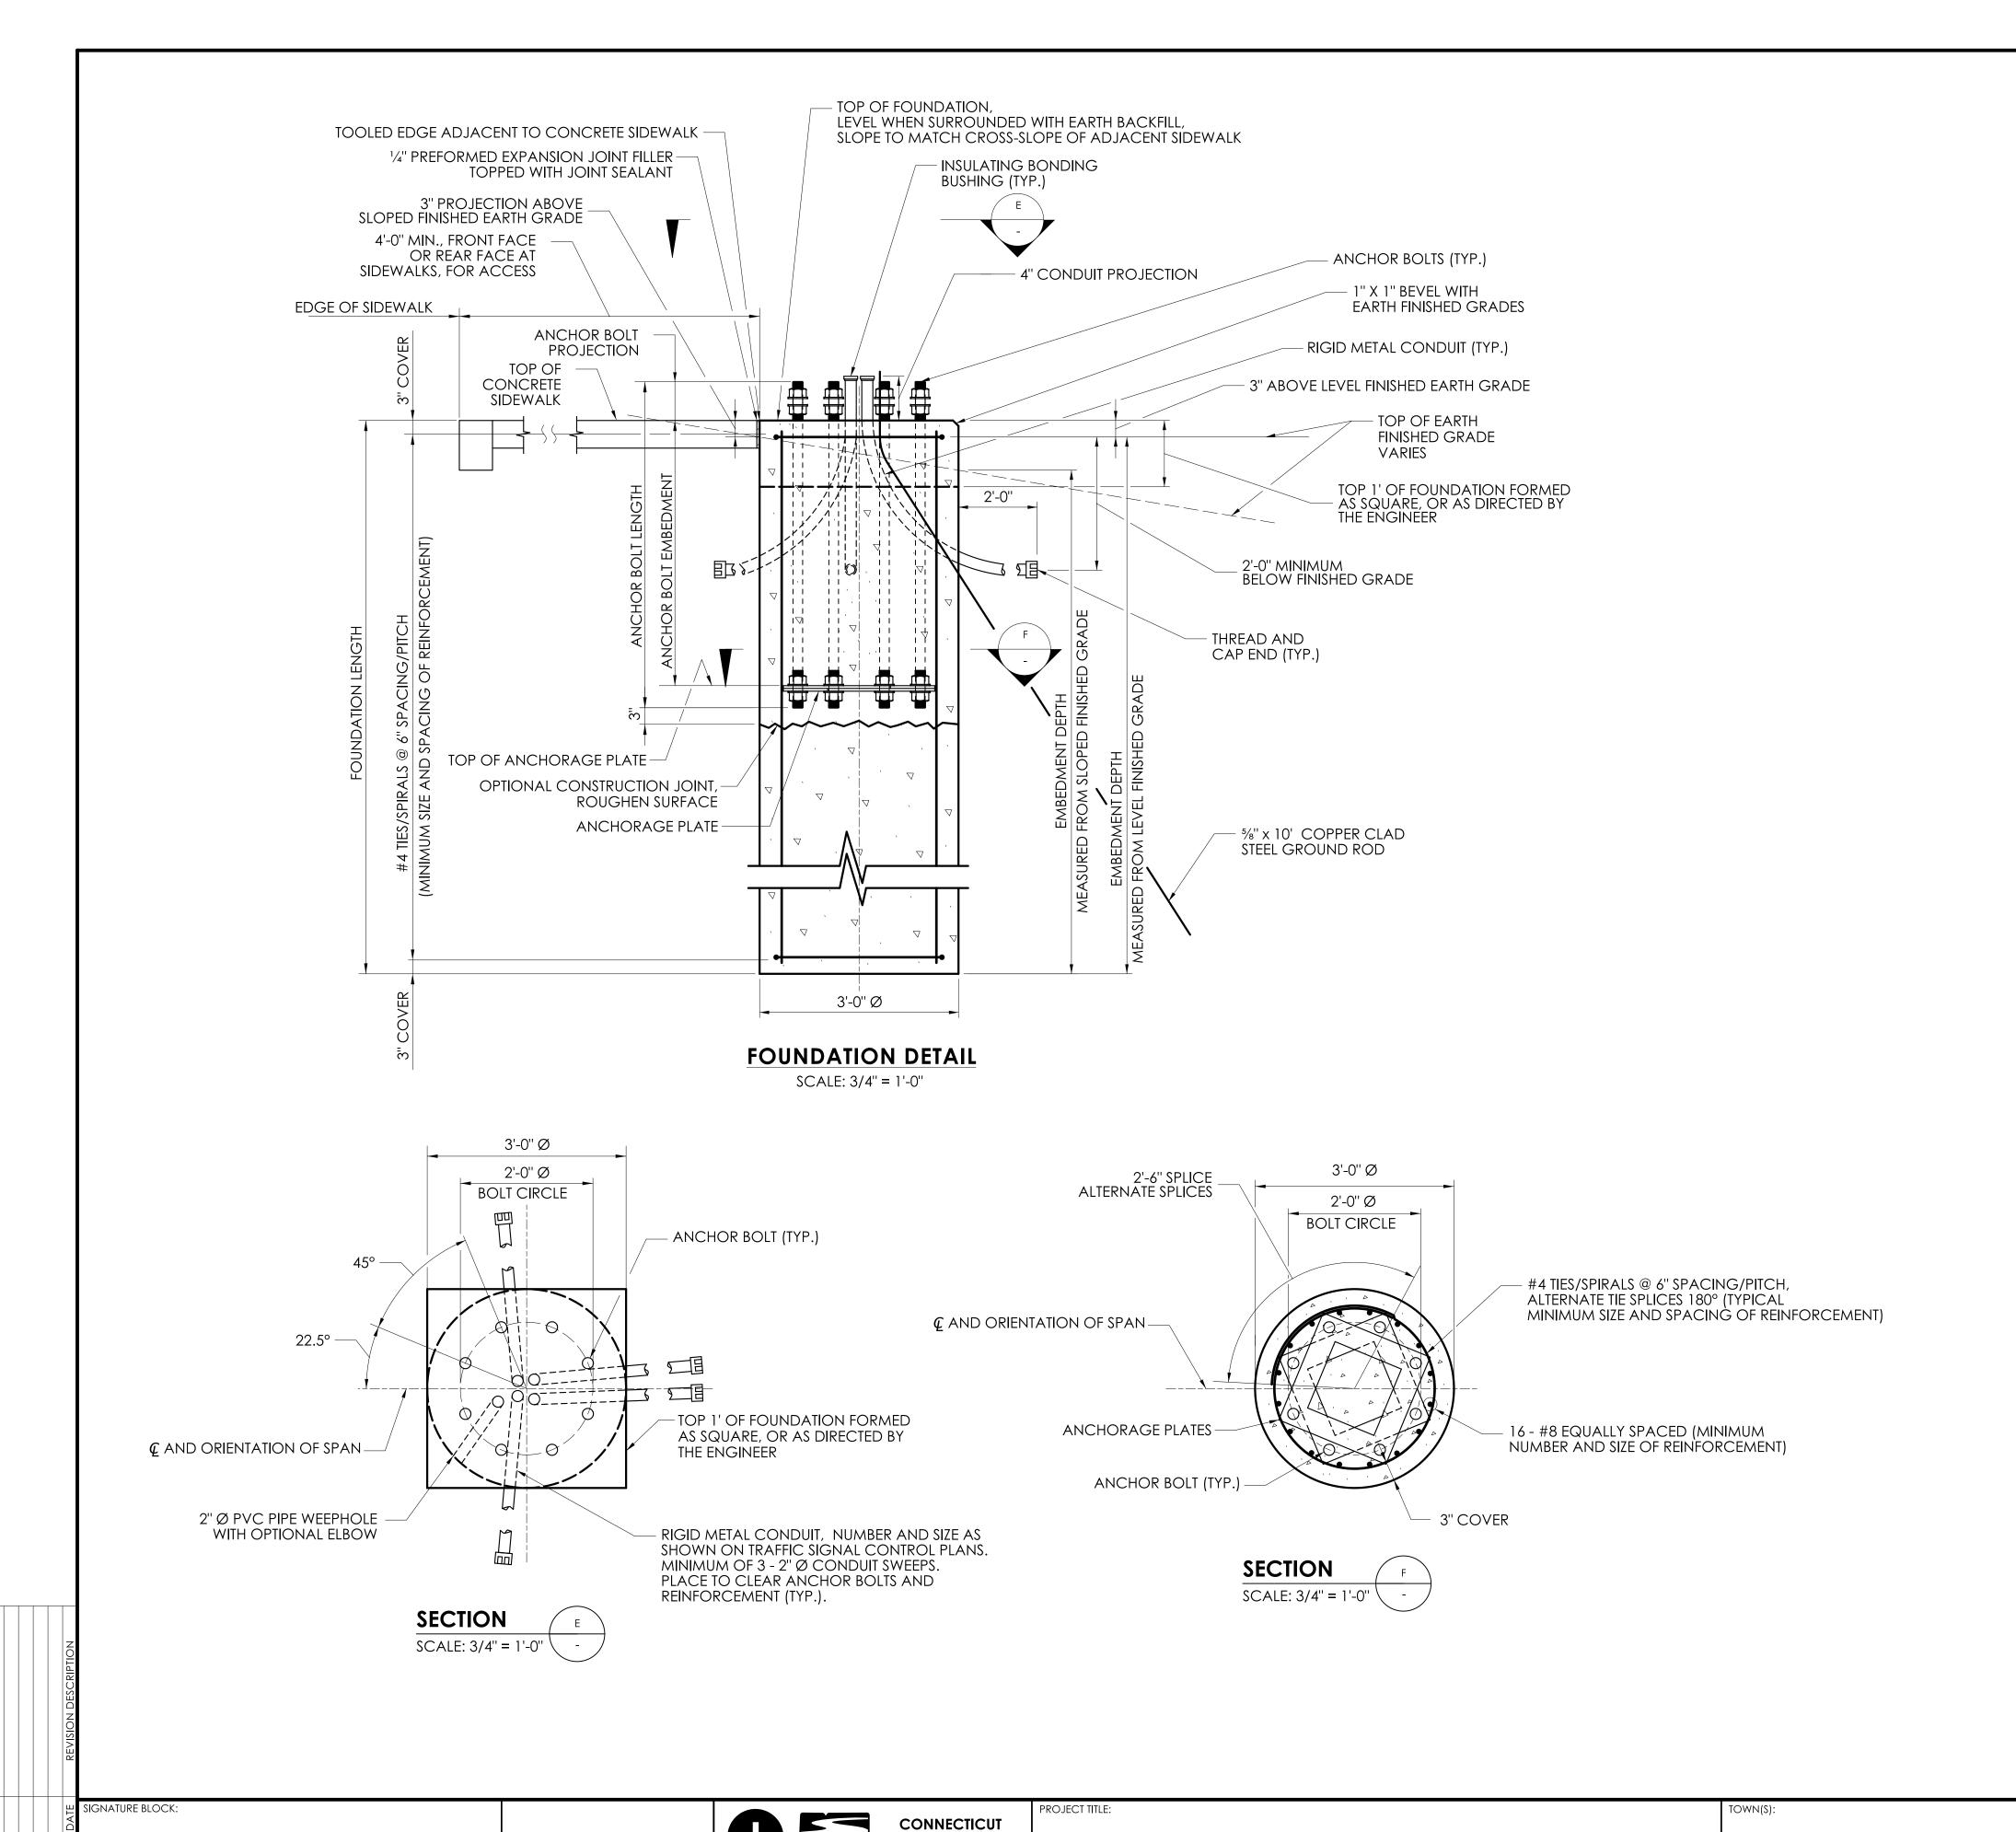

**DEPARTMENT OF** 

**TRANSPORTATION** 

SCALE AS NOTED

## **FOUNDATION NOTES**

THE DRILLED SHAFT FOUNDATION FOR THE SPAN POLE SHALL BE DESIGNED, FABRICATED, AND CONSTRUCTED BY THE CONTRACTOR IN ACCORDANCE WITH THE SPECIAL PROVISION "TRAFFIC CONTROL FOUNDATION-SPAN POLE".

THE FOUNDATION SHALL BE DESIGNED FOR THE SOILS AND ROCK PROPERTIES BASED ON THE SUBSURFACE CONDITIONS (CHARACTER OF THE SOIL AND ROCK, PRESENCE OF GROUND WATER, ETC.) IN THE LOCATION OF, ADJACENT TO AND BELOW THE DRILLED SHAFT FOUNDATION EXCAVATION. THE NEED AND EXTENT OF ALL SUBSURFACE EXPLORATIONS AND INVESTIGATIONS SHALL BE DETERMINED BY THE CONTRACTOR.

THE DESIGN OF THE FOUNDATION SHALL BE COORDINATED WITH THE SPAN POLE AND THE SPAN POLE ANCHORAGE TO ENSURE THAT THE FOUNDATION IS ADEQUATE FOR THE SPAN POLE REACTIONS AND TO AVOID CONFLICTS BETWEEN THE EMBEDDED SPAN POLE ANCHORAGE AND THE FOUNDATION REINFORCEMENT.

THE CONCRETE FOR THE FOUNDATION SHALL CONFORM TO CLASS PCC04460. THE COMPRESSIVE STRENGTH, f'c, USED IN DESIGN OF THE FOUNDATION SHALL BE 4,000 PSI. THE COMPRESSIVE STRENGTH OF THE CONCRETE IN THE CONSTRUCTED FOUNDATION SHALL CONFORM TO THE REQUIREMENTS OF 6.01 - CONCRETE FOR STRUCTURES AND M.03 - PORTLAND AND HYDRAULIC CEMENT CONCRETE.

THE REINFORCEMENT SHALL BE UNCOATED AND CONFORM TO ASTM A615, GRADE 60. THE REINFORCEMENT SHALL BE ASSEMBLED WITH WIRE TIES. WELDING TO ASSEMBLE REINFORCEMENT IS NOT PERMITTED. ALL REINFORCEMENT SHALL HAVE 3" COVER, UNLESS OTHERWISE NOTED.

THE CONCRETE SHALL BE PLACED IN THE EXCAVATION AGAINST UNDISTURBED EARTH.

THE SPAN POLE SHALL NOT BE ERECTED ON THE FOUNDATION UNTIL THE CONCRETE IN THE SHAFT HAS ATTAINED A COMPRESSIVE STRENGTH, I'C, GREATER THAN OR EQUAL TO 4000 PSI.

THE COST OF THE FOUNDATION, INCLUDING THE EXCAVATION, CONCRETE, REINFORCEMENT, CASING, WEEPHOLES, AND PREFORMED EXPANSION JOINT FILLER, INCLUDING THE DESIGN AND FABRICATION, TO BE INCLUDED FOR PAYMENT UNDER THE ITEM "TRAFFIC CONTROL FOUNDATION-SPAN POLE."

WHERE AN EXISTING CONCRETE SIDEWALK ABUTTING A FOUNDATION IS DAMAGED OR CUT DURING INSTALLATION, REPLACE THE ENTIRE SECTION. ALL SIDEWALK REPLACED DUE TO FOUNDATION INSTALLATION SHALL BE PAID FOR UNDER THE ITEM "CONCRETE SIDEWALK".

THE COST OF PREFORMED EXPANSION JOINT FILLER AND JOINT SEALANT SHALL BE INCLUDED FOR PAYMENT UNDER THE ITEM "CONCRETE SIDEWALK".

DRAWING TITLE: SP-4 STEEL SPAN POLE **FOUNDATION DETAILS** SHEET NO.: